

ETSI TS 101 907 V1.2.1 (2001-08)

Technical Specification

**Corporate Telecommunication Networks (CN);
Signalling interworking between QSIG and H.323;
Call Transfer supplementary services**



Reference

RTS/ECMA-00235

Keywords

H.323, network, QSIG, supplementary service

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.
All rights reserved.

Table of contents

Intellectual Property Rights	6
Foreword	6
Brief history	6
1 Scope.....	7
2 Conformance	8
3 Normative references	8
4 Definitions.....	9
4.1 External definitions	9
4.2 Other definitions.....	9
4.2.1 Entity A	9
4.2.2 Entity A*	9
4.2.3 Entity B	9
4.2.4 Entity B*	9
4.2.5 Entity B'	9
4.2.6 Entity C	9
4.2.7 Entity C*	10
4.2.8 Entity C'	10
4.2.9 Gateway	10
4.2.10 Leg AB.....	10
4.2.11 Leg AB*	10
4.2.12 Leg AC.....	10
4.2.13 Leg BC	10
4.2.14 Leg BC*	10
4.2.15 Leg B.....	10
4.2.16 Leg B*	10
4.2.17 Leg C.....	10
4.2.18 Scenario AB1.....	10
4.2.19 Scenario AB*1.....	10
4.2.20 Scenario AB2.....	11
4.2.21 Scenario AB*2.....	11
4.2.22 Scenario AC1.....	11
4.2.23 Scenario AC2.....	11
4.2.24 Scenario BC1	11
4.2.25 Scenario BC*1	11
4.2.26 Scenario BC2.....	11
4.2.27 Scenario BC*2.....	11
4.2.28 Scenario B1	11
4.2.29 Scenario B*1	11
4.2.30 Scenario B2	11
4.2.31 Scenario B*2	11
4.2.32 Scenario C1	11
4.2.33 Scenario C2	12
5 Acronyms	12
6 Service architecture	12
6.1 Service architecture for invocation and operation	12
6.1.1 QSIG service architecture.....	12
6.1.1.1 ECMA-178 service architecture - transfer by consultation	12
6.1.1.2 ECMA-300 service architecture – single step call transfer	14
6.1.2 H.450.2 service architecture	15
6.1.2.1 Transfer by consultation.....	15
6.1.2.2 Single step call transfer	17
6.1.3 Scenarios for interworking	18

6.1.3.1	Transfer by consultation.....	18
6.1.3.2	Single step call transfer.....	19
6.1.4	Determination of the location of entities when interworking.....	19
6.1.4.1	Transfer by consultation.....	19
6.1.4.2	Single step call transfer.....	23
6.2	Service architecture for activation, deactivation and interrogation.....	25
6.2.1	QSIG service architecture.....	25
6.2.1.1	ECMA-178 service architecture.....	25
6.2.1.2	ECMA-300 service architecture.....	25
6.2.2	H.450.2 service architecture.....	25
6.2.3	Scenarios for interworking.....	25
7	Protocol interworking – General requirements.....	25
8	Protocol interworking – Messages and APDUs.....	25
8.1	Scenario AB1.....	26
8.2	Scenario AB2.....	26
8.3	Scenario AC1.....	27
8.4	Scenario AC2.....	27
8.5	Scenario BC1.....	28
8.6	Scenario BC2.....	29
8.7	Scenario B1.....	30
8.8	Scenario B2.....	30
8.9	Scenario C1.....	31
8.10	Scenario C2.....	31
8.11	Scenario AB*1.....	32
8.12	Scenario AB*2.....	32
8.13	Scenario BC*1.....	33
8.14	Scenario BC*2.....	34
8.15	Scenario B*1.....	35
8.16	Scenario B*2.....	36
9	Protocol interworking – Content of APDUs.....	36
9.1	APDU content mapping from QSIG to H.323.....	36
9.1.1	QSIG ssctInitiate invoke APDU mapping to H.323 callTransferInitiate invoke APDU.....	36
9.1.2	QSIG ssctSetup invoke APDU mapping to H.323 callTransferSetup invoke APDU.....	37
9.2	APDU content mapping from H.323 to QSIG.....	37
9.2.1	H.323 callTransferInitiate invoke APDU mapping to QSIG ssctInitiate invoke APDU.....	37
9.2.2	H.323 callTransferSetup invoke APDU mapping to QSIG ssctSetup invoke APDU.....	37
Annex A (normative): Implementation Conformance Statement (ICS) proforma.....		38
A.1	Introduction.....	38
A.2	Instructions for completing the ICS proforma.....	38
A.2.1	General structure of the ICS proforma.....	38
A.2.2	Additional information.....	39
A.2.3	Exception information.....	39
A.2.4	Further indications of the ICS proforma tables.....	39
A.3	Identification of the implementation.....	40
A.3.1	Implementation identification.....	40
A.3.2	Specification for which this ICS applies.....	40
A.4	Major capabilities.....	40
A.5	General requirements.....	41
A.6	Message and APDU handling.....	42
A.6.1	Message and APDU handling for scenario AB1.....	42
A.6.2	Message and APDU handling for scenario AB2.....	42
A.6.3	Message and APDU handling for scenario AC1.....	42
A.6.4	Message and APDU handling for scenario AC2.....	43
A.6.5	Message and APDU handling for scenario BC1.....	43
A.6.6	Message and APDU handling for scenario BC2.....	43

A.6.7	Message and APDU handling for scenario B1	44
A.6.8	Message and APDU handling for scenario B2.....	44
A.6.9	Message and APDU handling for scenario C1.....	44
A.6.10	Message and APDU handling for scenario C2.....	45
A.6.11	Message and APDU handling for scenario AB*1	45
A.6.12	Message and APDU handling for scenario AB*2	45
A.6.13	Message and APDU handling for scenario BC*1	46
A.6.14	Message and APDU handling for scenario BC*2	46
A.6.15	Message and APDU handling for scenario B*1	47
A.6.16	Message and APDU handling for scenario B*2.....	47
A.7	APDU content mapping.....	48
Annex B (informative): Example message sequence diagrams		49
B.1	Scenario AB1 or AB*1	49
B.2	Scenario AB2 or AB*2	50
B.3	Scenario AC1	50
B.4	Scenario AC2	51
B.5	Scenario BC1 or BC*1.....	51
B.6	Scenario BC2 or BC*2.....	52
B.7	Scenario B1, C1, B*1 or C*1	52
B.8	Scenario B2, C2, B*2 or C*2	53
History		54

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ECMA on behalf of its members and those of the European Telecommunications Standards Institute (ETSI).

Brief history

The present document is one of a series of ECMA Standards defining the interworking of services and signalling protocols deployed in Corporate telecommunication Networks (CNs). The series uses telecommunication concepts as developed by ITU-T and conforms to the framework of International Standards on Open Systems Interconnection as defined by ISO/IEC. It has been produced under ETSI work item DTS/ECMA-00195.

The present document defines the signalling protocol interworking for call transfer supplementary services between a Private Integrated Services Network (PISN) and a packet-based private telecommunications network based on the Internet Protocol (IP). It is further assumed that the protocol for the PISN part is that defined for the Q reference point (QSIG) and that the protocols for the IP-based network are based on ITU-T Recommendation H.323.

The present document is based upon the practical experience of ECMA member companies and the results of their active and continuous participation in the work of ISO/IEC JTC1, ITU-T, ETSI and other international and national standardization bodies. It represents a pragmatic and widely based consensus.

The present document is in complete alignment with International Standard ISO/IEC 21410: 2001(E) to be published by ISO/IEC in 2001.

Adopted as 2nd Edition of Standard ECMA-308 by the General Assembly of June 2001.

1 Scope

The present document specifies signalling interworking between "QSIG" and "H.323" in support of the call transfer supplementary services within a Corporate telecommunication Network (CN).

"QSIG" is a signalling protocol that operates at the Q reference point between Private Integrated Services eXchanges (PINX) within a Private Integrated Services Network (PISN). The Q reference point is defined in ECMA-133. A PISN provides circuit-switched basic services and supplementary services to its users. QSIG is specified in other standards, in particular ECMA-143 (call control in support of basic services), ECMA-165 (generic functional protocol for the support of supplementary services) and a number of standards specifying individual supplementary services. ECMA-178 specifies the QSIG protocol in support of call transfer by consultation and ECMA-300 specifies the QSIG protocol in support of single step call transfer.

"H.323" is a set of signalling protocols for the support of voice or multimedia communication within a packet network, in particular a packet network that uses the Internet Protocol (IP) as its network layer protocol (IP network). H.323 signalling protocols operate between endpoints in an IP network, either indirectly via one or more gatekeepers, or directly. An endpoint can be a terminal or a gateway to another network. H.323 is an "umbrella" recommendation referring to various ITU-T Recommendations, in particular Recommendations H.225.0 and H.245 (basic communication capabilities) and ITU-T Recommendation H.450.1 (generic functional protocol for the support of supplementary services). ITU-T Recommendation H.450.2 specifies the H.323 protocol in support of call transfer.

NOTE: H.450.2 applies only to the 1998 version of H.323 (also known as H.323 version 2) and to later versions.

Call transfer by consultation, as supported by ECMA-178, is a supplementary service that enables a user (user A) to transform two of that user's calls (at least one of which must be answered) into a new call between the two other users in the two calls (users B and C).

Single step call transfer, as supported by ECMA-300, is a supplementary service that enables a user (user A) to transform an existing call between user A and user B into a new call between user B and user C without user A needing to establish a call with user C prior to transfer.

Call transfer, as supported by H.450.2, is a supplementary service that enables the served user (user A) to transform an existing call with a second user (user B) into a new call between user B and a third user (user C) selected by user A. User A may or may not have a call established with user C prior to call transfer. If a call is already established between user A and user C, this is known as transfer by consultation and is equivalent to call transfer as supported by ECMA-178. If a call is not already established between user A and user C, this is known as single step call transfer and is equivalent to call transfer as supported by ECMA-300.

Interworking between QSIG and H.323 permits a call originating at a user of a PISN to terminate at a user of an IP network, or a call originating at a user of an IP network to terminate at a user of a PISN. The present document provides the following additional capabilities:

- a PISN user with two calls established, at least one of which being to or from a user in an IP network, to be able to transform those two calls into a new call between the other two users involved;
- a PISN user with a call established to or from a user in an IP network to be able to transform that call into a new call between the IP network user and a third user selected by the PISN user, that third user being either in the IP network or in the PISN;
- a PISN user with a call established to a second PISN user to be able to transfer that call into a new call between the second user and a third user selected by the first user, that third user being in an IP network;
- an IP network user with two calls established, at least one of which being to or from a user in a PISN, to be able to transform those two calls into a new call between the other two users involved;
- an IP network user with a call established to or from a user in a PISN to be able to transform that call into a new call between the PISN user and a third user selected by the IP network user, that third user being either in the IP network or in the PISN; and
- an IP network user with a call established to a second user in the IP network to be able to transfer that call into a new call between the second user and a third user selected by the first user, that third user being in a PISN.

The present document is applicable to any interworking unit that can act as a gateway between a PISN employing QSIG and an IP network employing H.323.

2 Conformance

In order to conform to the present document, a gateway shall satisfy the requirements identified in the Implementation Conformance Statement (ICS) proforma in annex A.

3 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this Standard. All standards are subject to revision, and parties to agreements based on this Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below.

In the case of references to ECMA Standards that are aligned with ISO/IEC International Standards, the number of the appropriate ISO/IEC International Standard is given in brackets after the ECMA reference.

ECMA-133: "Private Integrated Services Network (PISN) - Reference Configurations for PISN Exchanges (PINX), 2nd edition" (International Standard ISO/IEC 11579-1).

ECMA-143: "Private Integrated Services Network (PISN) - Circuit Mode Bearer Services - Inter-Exchange Signalling Procedures and Protocol (QSIG-BC), 3rd edition" (International Standard ISO/IEC 11572).

ECMA-165: "Private Integrated Services Network (PISN) - Generic Functional Protocol for the Support of Supplementary Services - Inter-Exchange Signalling Procedures and Protocol (QSIG-GF), 4th edition" (International Standard ISO/IEC 11582).

ECMA-178: "Private Integrated Services Network (PISN) - Inter-Exchange Signalling Protocol - Call Transfer Supplementary Service (QSIG-CT), 2nd edition" (International Standard ISO/IEC 13869).

ECMA-300: "Private Integrated Services Network (PISN) - Inter-Exchange Signalling Protocol - Single Step Call Transfer Supplementary Service (QSIG-SSCT)" (International Standard ISO/IEC 19460).

ECMA-307: "Corporate Telecommunication Networks - Signalling Interworking between QSIG and H.323 - Generic Functional Protocol for the Support of Supplementary Services" (International Standard ISO/IEC 21409).

ITU-T Recommendation H.225.0 (2000): "Call signalling protocols and media stream packetization for packet-based multimedia communication systems".

ITU-T Recommendation H.245 (2000): "Control protocol for multimedia communication".

ITU-T Recommendation H.323 (2000): "Packet-based multimedia communications systems".

ITU-T Recommendation H.450.1 (1998): "Generic functional protocol for the support of supplementary services in H.323".

ITU-T Recommendation H.450.2 (1998): "Call transfer supplementary service for H.323".

4 Definitions

For the purposes of the present document, the following terms and definitions apply.

4.1 External definitions

The present document uses the following terms defined in other documents:

- Call (ECMA-307)
- Corporate telecommunication Network (CN) (ECMA-307)
- Endpoint (ITU-T Recommendation H.323)
- IP network (ECMA-307)
- Gatekeeper (ITU-T Recommendation H.323)
- Private Integrated Services Network (PISN) (ECMA-307)
- Private Integrated services Network eXchange (PINX) (ECMA-133)

Additionally the definitions in ECMA-178, ECMA-300 and ITU-T Recommendation H.450.2 apply as appropriate.

4.2 Other definitions

4.2.1 Entity A

In call transfer by consultation, the signalling entity at the PINX or H.323 endpoint serving the transferring user (user A).

4.2.2 Entity A*

In single step call transfer, the signalling entity at the PINX or H.323 endpoint serving the transferring user (user A).

4.2.3 Entity B

In call transfer by consultation, the signalling entity in the PISN or IP network associated with the call between the transferring user (user A) and the transferred user (user B).

4.2.4 Entity B*

In single step call transfer, the signalling entity in the PISN or IP network associated with the call between the transferring user (user A) and the transferred user (user B).

4.2.5 Entity B'

Signalling entity at the PINX or the H.323 endpoint serving the transferred user (user B).

4.2.6 Entity C

In call transfer by consultation, the signalling entity in the PISN or IP network associated with the call between the transferring user (user A) and the transferred-to-user (user C).

4.2.7 Entity C*

In single step call transfer, the signalling entity in the PISN or IP network associated with the call between the transferred user (user B) and the transferred-to-user (user C).

4.2.8 Entity C'

Signalling entity at the PINX or H.323 endpoint serving the transferred-to-user (user C).

4.2.9 Gateway

A gateway as defined in H.323 specifically for the purpose of interworking with a network employing QSIG.

4.2.10 Leg AB

In call transfer by consultation, the call segment that lies between entity A and entity B.

4.2.11 Leg AB*

In single step call transfer, the call segment that lies between entity A* and entity B*.

4.2.12 Leg AC

In call transfer by consultation, the call segment that lies between entity A and entity C.

4.2.13 Leg BC

In call transfer by consultation, the call segment that lies between entity B and entity C.

4.2.14 Leg BC*

In single step call transfer, the call segment that lies between entity B* and entity C*.

4.2.15 Leg B

In call transfer by consultation, the call segment that lies between the entity B and entity B'.

4.2.16 Leg B*

In single step call transfer, the call segment that lies between entity B* and entity B'.

4.2.17 Leg C

In call transfer by consultation, the call segment that lies between entity C and entity C'.

4.2.18 Scenario AB1

Interworking arrangement in which entity A (PINX A) is in the PISN and entity B is in the IP network.

4.2.19 Scenario AB*1

Interworking arrangement in which entity A* (PINX A) is in the PISN and entity B* is in the IP network.

4.2.20 Scenario AB2

Interworking arrangement in which entity A (endpoint A) is in the IP network and entity B is in the PISN.

4.2.21 Scenario AB*2

Interworking arrangement in which entity A* (endpoint A) is in the IP network and entity B* is in the PISN.

4.2.22 Scenario AC1

Interworking arrangement in which entity A (PINX A) is in the PISN and entity C is in the IP network.

4.2.23 Scenario AC2

Interworking arrangement in which entity A (endpoint A) is in the IP network and entity C is in the PISN.

4.2.24 Scenario BC1

Interworking arrangement in which entity B (PINX B) is in the PISN and entity C is in the IP network.

4.2.25 Scenario BC*1

Interworking arrangement in which entity B* (PINX B) is in the PISN and entity C* is in the IP network.

4.2.26 Scenario BC2

Interworking arrangement in which entity B is in the IP network and entity C is in the PISN.

4.2.27 Scenario BC*2

Interworking arrangement in which entity B* is in the IP network and entity C* is in the PISN.

4.2.28 Scenario B1

Interworking arrangement in which entity B (PINX B) is in the PISN and entity B' is in the IP network.

4.2.29 Scenario B*1

Interworking arrangement in which entity B* (PINX B) is in the PISN and entity B' is in the IP network.

4.2.30 Scenario B2

Interworking arrangement in which entity B (diverting endpoint or its gatekeeper) is in the IP network and entity B' is in the PISN.

4.2.31 Scenario B*2

Interworking arrangement in which entity B* (diverting endpoint or its gatekeeper) is in the IP network and entity B' is in the PISN.

4.2.32 Scenario C1

Interworking arrangement in which entity C (PINX C) is in the PISN and entity C' is in the IP network.

4.2.33 Scenario C2

Interworking arrangement in which entity C (endpoint C) is in the IP network and entity C' is in the PISN.

5 Acronyms

APDU	Application Protocol Data Unit
CN	Corporate telecommunication Network
ICS	Implementation Conformance Statement
IP	Internet Protocol
PINX	Private Integrated services Network eXchange
PISN	Private Integrated Services Network
SS-CT	Supplementary Service Call Transfer
SS-SSCT	Supplementary Service Single Step Call Transfer

6 Service architecture

6.1 Service architecture for invocation and operation

6.1.1 QSIG service architecture

QSIG supports two different call transfer services:

- transfer by consultation (ECMA-178); and
- single step call transfer (ECMA-300).

6.1.1.1 ECMA-178 service architecture - transfer by consultation

ECMA-178 supports a call transfer service that starts from a situation where user A has two calls (typically one of which is on hold). Transfer from this situation can be performed in two ways: by join (at the PINX serving user A) or by rerouting.

A single model can be derived to accommodate both scenarios. The model involves five signalling entities as follows:

- entity A - acts on behalf of user A and co-ordinates the transfer;
- entity B - initiates the re-routed connection from the first transferred user (user B) to the other transferred user (user C);
- entity B' - acts on behalf of user B;
- entity C - terminates the re-routed connection from user B to user C and completes the join; and
- entity C' - acts on behalf of user C.

This can be represented diagrammatically as shown in figure 1.

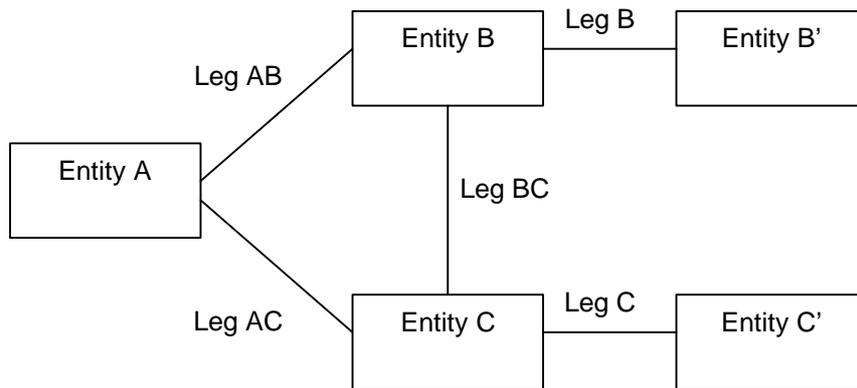


Figure 1: Generalized call transfer model for QSIG transfer by consultation

From this it can be seen that there are five segments or "legs" to the call:

- leg AB between entity A and entity B;
- leg AC between entity A and entity C;
- leg BC between entity B and entity C;
- leg B between entity B and entity B'; and
- leg C between entity C and entity C'.

The protocol defined in ECMA-178 supports each of these five legs.

For both transfer by join and transfer by rerouting, entities A, B' and C' are located at the PINX serving user A, user B and user C respectively.

For call transfer by join, entities B and C are collocated with entity A in the PINX serving user A. This means that legs AB, AC and BC are all internal to that PINX, and therefore the QSIG protocols for these legs do not apply. Only the QSIG protocols for legs B and C apply. This is shown in figure 2.

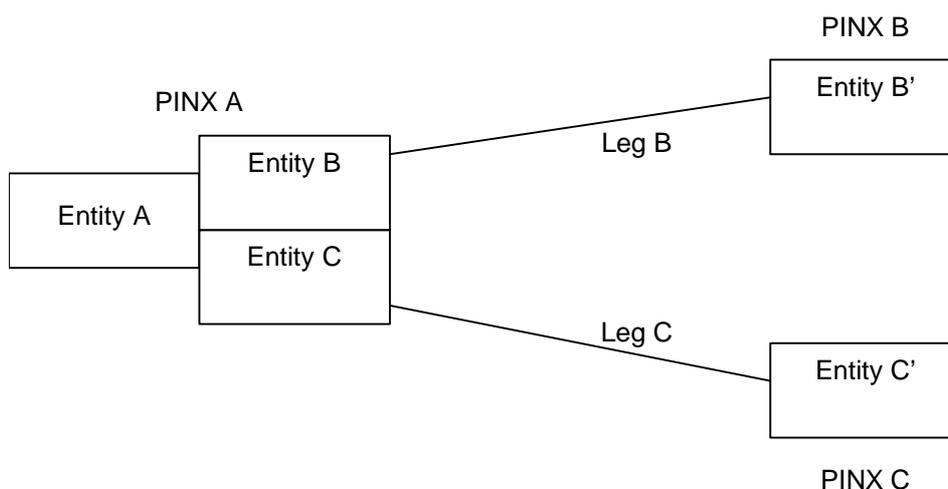


Figure 2: Call transfer by join model for QSIG

For call transfer by rerouteing, entity B is collocated with entity B' in the PINX serving user B, and entity C is collocated with entity C' in the PINX serving user C. This means that legs B and C are internal to the respective PINXs, and therefore the QSIG protocols for these legs do not apply. Only the QSIG protocols for legs AB, AC and BC apply. This is shown in figure 3.

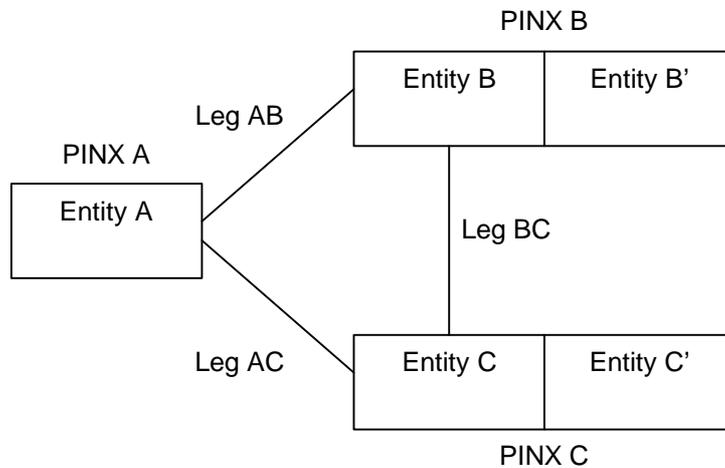


Figure 3: Call transfer by rerouteing model for QSIG

In both cases (transfer by join and transfer by rerouteing), where a user is in another network, the role of entity A, entity B' or entity C' is performed by the other network, the gateway PINX or the two in combination. However, from the QSIG point of view the role is performed by the gateway PINX.

6.1.1.2 ECMA-300 service architecture – single step call transfer

ECMA-300 supports a call transfer service that starts from a situation where user A has an active call with user B and the call is to be transferred to user C in the case where A does not already have a call to user C.

If user A does not provide sufficient information to enable a call to be established to user C, user B may provide additional information to identify user C and enable the call to be established.

The generalized model for Single Step call Transfer is as shown in figure 4.

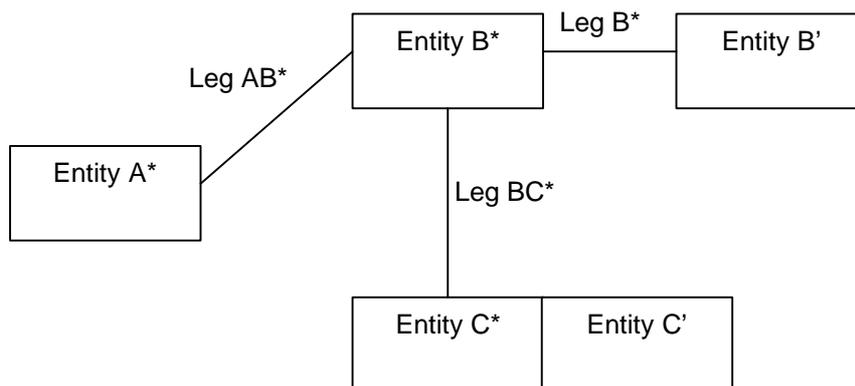


Figure 4: Generalized model for QSIG Single Step Call Transfer

Compared with the general model for transfer by consultation, the following differences exist:

- entity A* replaces entity A (although it has some common functionality);
- entity B* replaces entity B (although it has some common functionality);
- entity C* replaces entity C;
- leg AB* replaces leg AB (but differs only slightly);
- leg BC* replaces leg BC (but differs only slightly);
- leg B* replaces Leg B (but differs only slightly); and
- leg AC does not exist.

Entities A*, B' and C' are located at the PINX serving user A, user B and user C respectively.

Entity B* may be located at any PINX between entity A* and entity B'.

Entity C* is always collocated with entity C' in the PINX serving user C. This means that the leg between entity C* and entity C' is internal to the PINX, and therefore the QSIG protocol for this leg does not apply. Only the protocols defined in ECMA-300 for legs AB*, BC* and B* apply.

Where a user is in another network, the role of entity A*, entity B' or the combined entities C*/C' is performed by the other network, the gateway PINX or the two in combination. However, from the QSIG point of view the role is performed by the gateway PINX.

6.1.2 H.450.2 service architecture

H.450.2 supports two different call transfer services:

- transfer by consultation (similar to the service supported by ECMA-178); and
- single step call transfer (similar to the service supported by ECMA-300).

6.1.2.1 Transfer by consultation

The model shown in figure 1 for QSIG call transfer by consultation applies also to ITU-T Recommendation H.450.2. Various scenarios arise, depending on gatekeeper involvement. A gatekeeper can act on behalf of user B and/or a gatekeeper can act on behalf of user C.

If no gatekeepers are involved in the call transfer service, entity A is located at user A's endpoint, entities B and B' are located at user B's endpoint, and entities C and C' are located at user C's endpoint. Legs AB, AC and BC are supported by H.450.2 signalling. This is shown in figure 5.

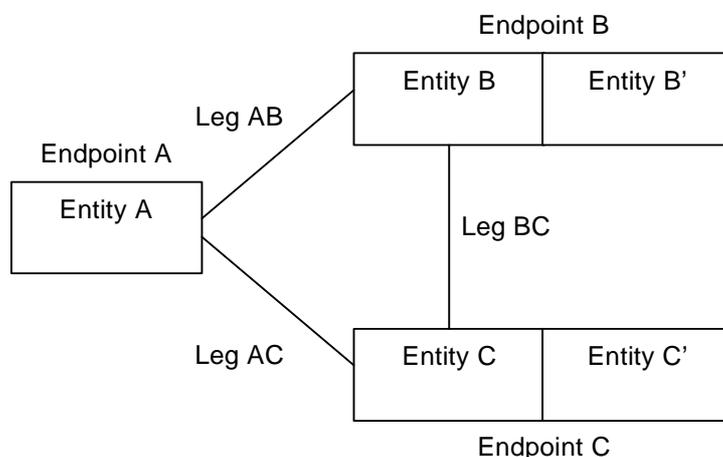


Figure 5: H.450.2 call transfer by consultation model – no gatekeepers involved

If a gatekeeper is involved in call transfer on behalf of user B and another gatekeeper is involved on behalf of user C, entities B and C are located in the respective gatekeepers and legs AB, AC, CB, B and C are all supported by H.450.2 signalling. This is shown in figure 6.

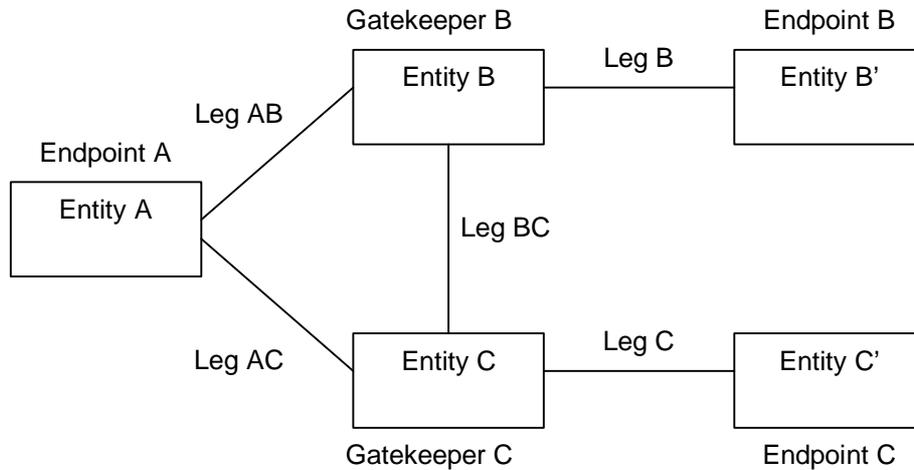


Figure 6: H.450.2 call transfer by consultation model – gatekeepers involved on behalf of endpoint B and endpoint C

Models for the cases where only entity B or only entity C is located at a gatekeeper can easily be derived.

If the same gatekeeper acts on behalf of user B and user C, the model in figure 7 applies. In this case leg BC is internal to the gatekeeper and H.450.2 signalling does not apply.

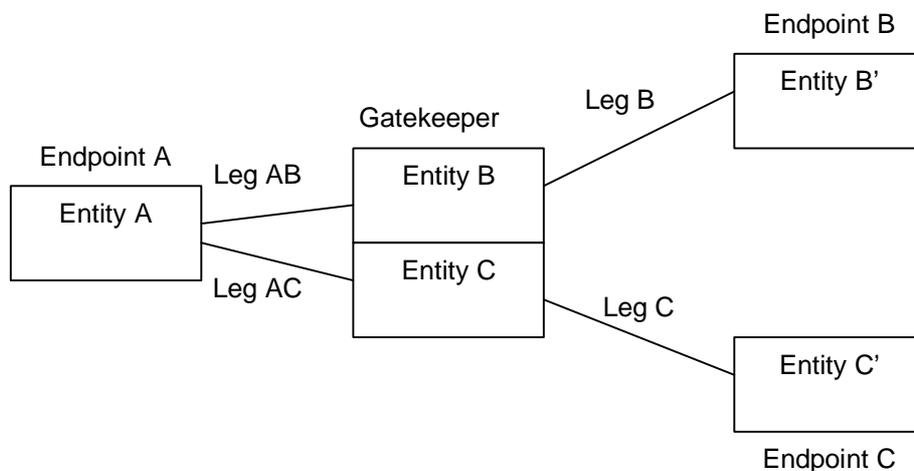


Figure 7: H.450.2 call transfer by consultation model – single gatekeeper involved on behalf of endpoint B and endpoint C

Where a user is in another network, the role of entity A, entities B and B' or entities C and C' is performed by the other network, the gateway, or the two in combination. However, from the H.450.2 point of view the role is performed by the gateway.

NOTE: The equivalent of QSIG transfer by join does not exist with H.450.2. Legs AB and AC exist in all scenarios (although leg BC can be hidden inside a gatekeeper).

6.1.2.2 Single step call transfer

For single step call transfer, the general model is as shown in figure 4.

Unlike the QSIG single step call transfer supplementary service (see clause 6.1.1.2), the H.450.2 single step call transfer supplementary service does not enable user B to provide additional information to identify user C if user A did not provide sufficient information to enable a call to be established to user C.

Various scenarios arise, depending on gatekeeper involvement. A gatekeeper can act on behalf of user B and/or a gatekeeper can act on behalf of user C. This has impact on the exposure of legs B* and C*, as for transfer by consultation.

If no gatekeepers are involved in single step call transfer, entity A* is located at user A's endpoint, entities B* and B' are located at user B's endpoint, and entities C* and C' are located at user C's endpoint. Legs AB*, and BC* are supported by H.450.2 signalling. This is shown in figure 8.

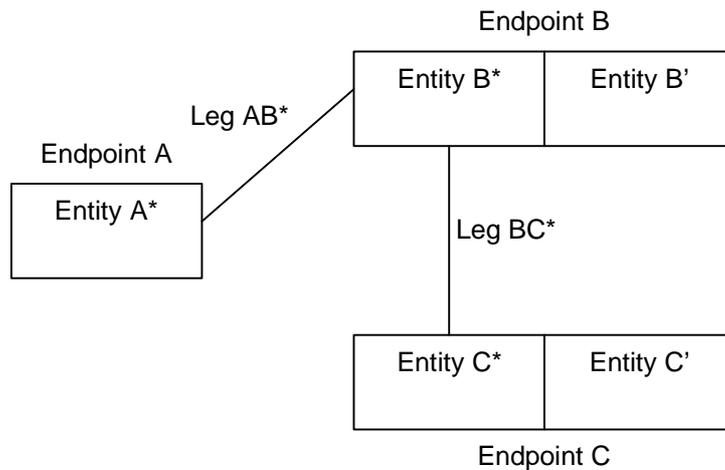


Figure 8: H.450.2 single step call transfer model– no gatekeepers involved

If a gatekeeper is involved in single step call transfer on behalf of user B and another gatekeeper is involved on behalf of user C, entities B* and C*/C' are located in the respective gatekeepers and legs AB*, BC*, and B* are all supported by H.450.2 signalling. This is shown in figure 9.

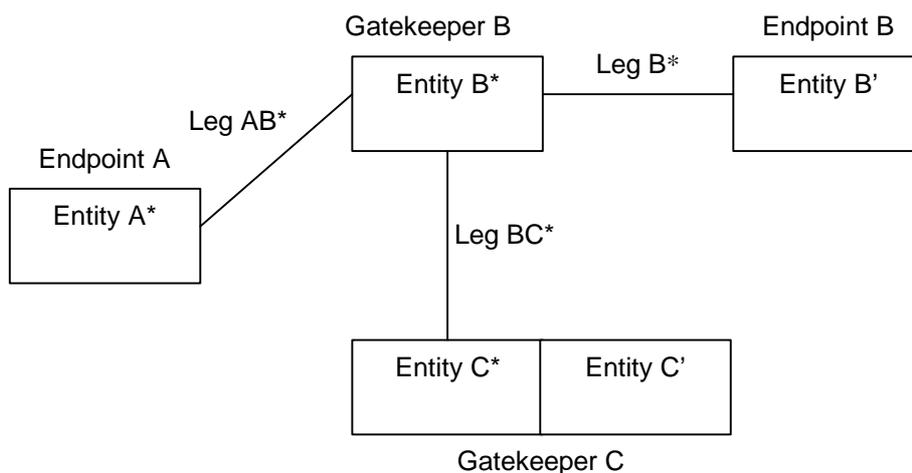


Figure 9: H.450.2 single step call transfer model – gatekeepers involved on behalf of endpoint B and endpoint C

Models for the cases where only entity B or only entity C is located at a gatekeeper can easily be derived.

If the same gatekeeper acts on behalf of user B and user C, the model in figure 10 applies. In this case leg BC* is internal to the gatekeeper and H.450.2 signalling does not apply.

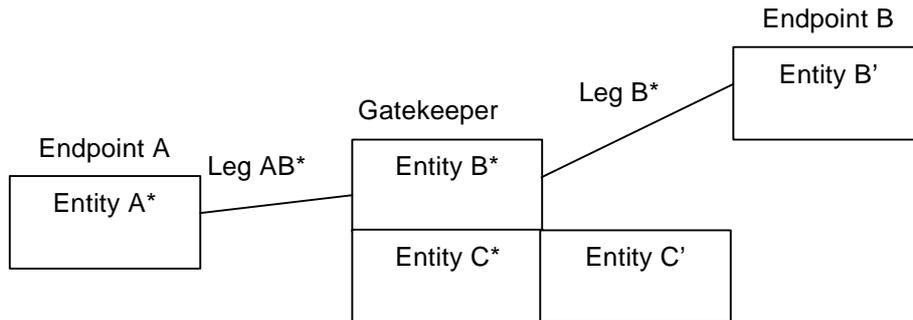


Figure 10: H.450.2 single step call transfer model – single gatekeeper involved on behalf of endpoint B and endpoint C

In all of these cases of single step call transfer, where a user is in another network, the role of entity A*, entities B* and B' or entities C* and C' is performed by the other network, the gateway, or the two in combination. However, from the H.450.2 point of view the role is performed by the gateway.

6.1.3 Scenarios for interworking

6.1.3.1 Transfer by consultation

The models for QSIG and H.450.2 are very similar. This means that the same model is applicable to the inter-networking situation between an IP network and a PISN, where one or more of the users involved are served by the IP network and the others are served by the PISN.

Entities A, B' and C' are always located in the network of the user concerned, but there is some flexibility in the location of entities B and C. Interworking between H.450.2 and QSIG can occur on any of the five legs. For each of the five possible points of interworking, two scenarios arise, depending on which side of the interworking point the PISN lies.

This gives 10 scenarios in total that need to be considered:

- Scenario AB1: Entity A (PINX A) in PISN, entity B (gatekeeper B or endpoint B) in IP network;
- Scenario AB2: Entity A (endpoint A) in IP network, entity B (PINX B) in PISN;
- Scenario AC1: Entity A (PINX A) in PISN, entity C (gatekeeper C or endpoint C) in IP network;
- Scenario AC2: Entity A (endpoint A) in IP network, entity C (PINX C) in PISN;
- Scenario BC1: Entity B (PINX B) in PISN, entity C (gatekeeper C or endpoint C) in IP network;
- Scenario BC2: Entity B (gatekeeper B or endpoint B) in IP network, entity C (PINX C) in PISN;
- Scenario B1: Entity B (PINX B) in PISN, entity B' (endpoint B) in IP network;
- Scenario B2: Entity B (gatekeeper B or endpoint B) in IP network, entity B' (PINX B) in PISN;
- Scenario C1: Entity C (PINX C) in PISN, entity C' (endpoint C) in IP network; and
- Scenario C2: Entity C (gatekeeper C or endpoint C) in IP network, entity C' (PINX C) in PISN.

With scenarios AB1, AB2, AC1, AC2, BC1 and BC2, the PISN is involved in transfer by rerouting. Since this is only an optional part of ECMA-178, these scenarios will not always be available.

It is possible for more than one scenario to apply to the same call. In particular, because of the triangular situation, scenarios AB1, AB2, AC1, AC2, BC1 and BC2 will always occur in pairs, e.g. scenarios AB1 and AC1 if entity A is in the PISN and entities B and C are in the IP network.

A point of interworking will be implemented in a gateway, which acts as both a H.323 endpoint from the point of view of the IP network and an end PINX from the point of view of the PISN. Call transfer entities can be located in the gateway but are logically separate from the point of interworking. For example, if user B is in the PISN and users A and C are in the IP network, entity B could be located in the gateway on the IP network side of the interworking point, with entity B' in the PISN (PINX B). Logically interworking would still be taking place on leg B.

6.1.3.2 Single step call transfer

The models for QSIG and H.450.2 are very similar. This means that the same model is applicable to the inter-networking situation between an IP network and a PISN, where one or more of the users involved are served by the IP network and the others are served by the PISN.

Entities A*, B' C* and C' are always located in the network of the user concerned, but there is some flexibility in the location of entity B*. Interworking between H.450.2 and QSIG can occur on any of legs AB*, BC* and B*. For each of the three points of interworking, two scenarios arise, depending on which side of the interworking point the PISN lies. This gives six scenarios in total that need to be considered:

- Scenario AB*1: Entity A* (PINX A) in PISN, entity B* (gatekeeper B* or endpoint B*) in IP network;
- Scenario AB*2: Entity A* (endpoint A) in IP network, entity B* (PINX B) in PISN;
- Scenario BC*1: Entity B* (PINX B) in PISN, entity C* (gatekeeper C* or endpoint C*) in IP network;
- Scenario BC*2: Entity B* (gatekeeper B* or endpoint B*) in IP network, combined entities C*/C' (PINX C) in PISN;
- Scenario B*1: Entity B* (PINX B) in PISN, entity B' (endpoint B) in IP network;
- Scenario B*2: Entity B* (gatekeeper B* or endpoint B*) in IP network, entity B' (PINX B) in PISN.

It is possible for more than one scenario to apply to the same call e.g. scenarios BC*1 and B*1 if entity B* is in the PISN and entities B' and C* are in the IP network.

A point of interworking will be implemented in a gateway, which acts as both a H.323 endpoint from the point of view of the IP network and an end PINX from the point of view of the PISN. Single step call transfer entities can be located in the gateway but are logically separate from the point of interworking. For example, if user B is in the PISN and users A and C are in the IP network, entity B* could be located in the gateway on the IP network side of the interworking point, with entity B' in the PISN (PINX B). Logically interworking would still be taking place on leg B*.

6.1.4 Determination of the location of entities when interworking

6.1.4.1 Transfer by consultation

Entities A, B' and C' are always located in the network of the user concerned. The locations of entities B and C are determined as follows.

If user A and therefore entity A are in the QSIG network at PINX A and PINX A implements only transfer by join or chooses to perform transfer by join, entities B and C will be located at PINX A. Interworking will occur on leg B and/or leg C, depending on the location of users B and C. This is shown in figure 11.

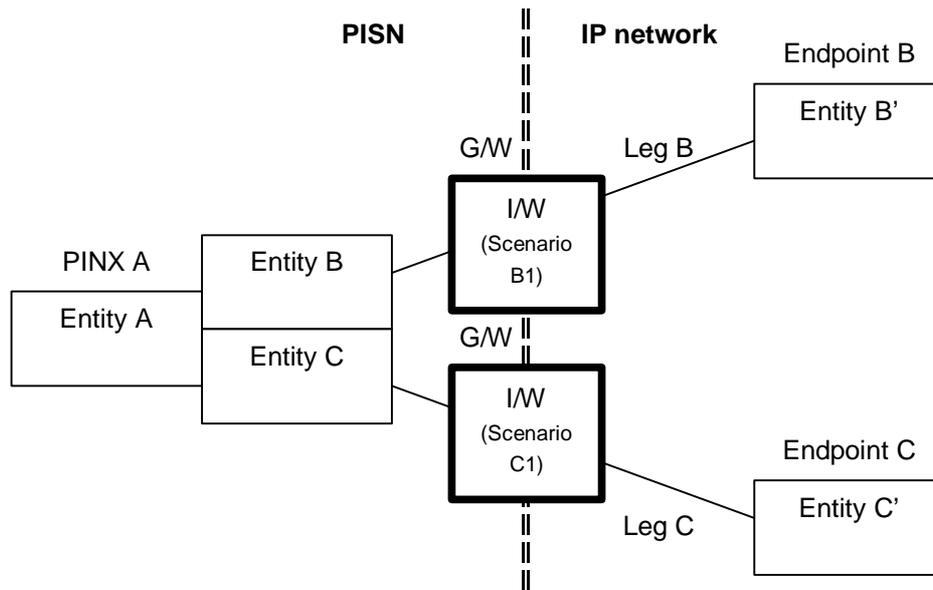


Figure 11: Interworking – transfer by join in a PISN

If user A and therefore entity A are in the QSIG network at PINX A and PINX A performs transfer by rerouting, if user B is in the IP network the gateway between user A's network and user B's network can choose, on receipt of a transfer request from PINX A, whether to provide entity B (in which case interworking occurs on leg B) or to instruct the IP network to provide entity B (in which case interworking occurs on leg AB).

Similarly, if user C is in the IP network the gateway between user A's network and user B's network can choose, on receipt of a transfer identify request from PINX A, whether to provide entity C (in which case interworking occurs on leg C) or to instruct the IP network to provide entity C (in which case interworking occurs on leg AC).

Figures 12 and 13 show the two cases where the two gateways make the same decision. If the two gateways make different decisions, interworking will also occur on leg BC. The case where entity B is in the PISN and entity C is in the IP network is shown in figure 14. The reverse case is not shown.

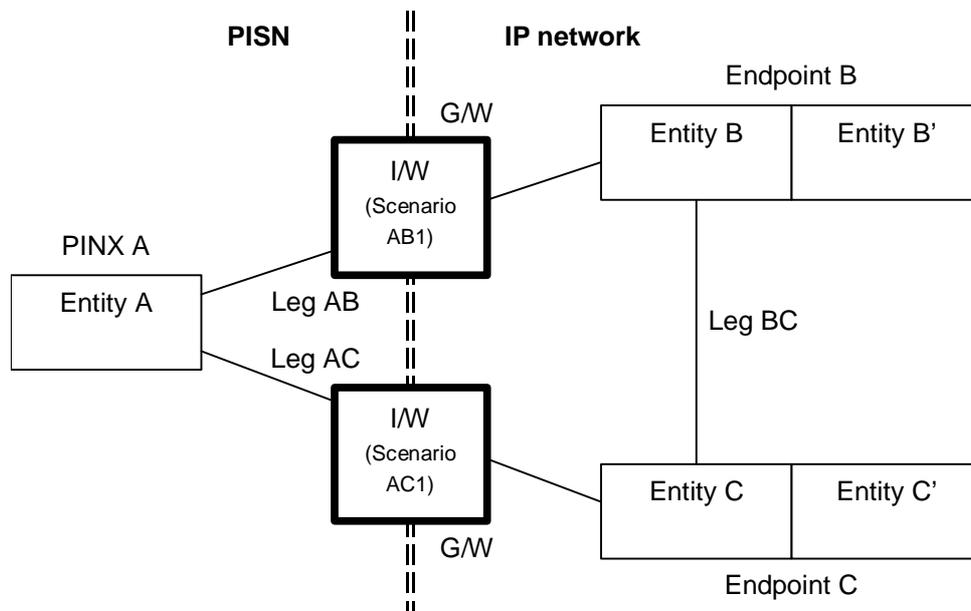


Figure 12: Interworking – transfer by rerouting between PINX A and endpoints B and C in the IP network

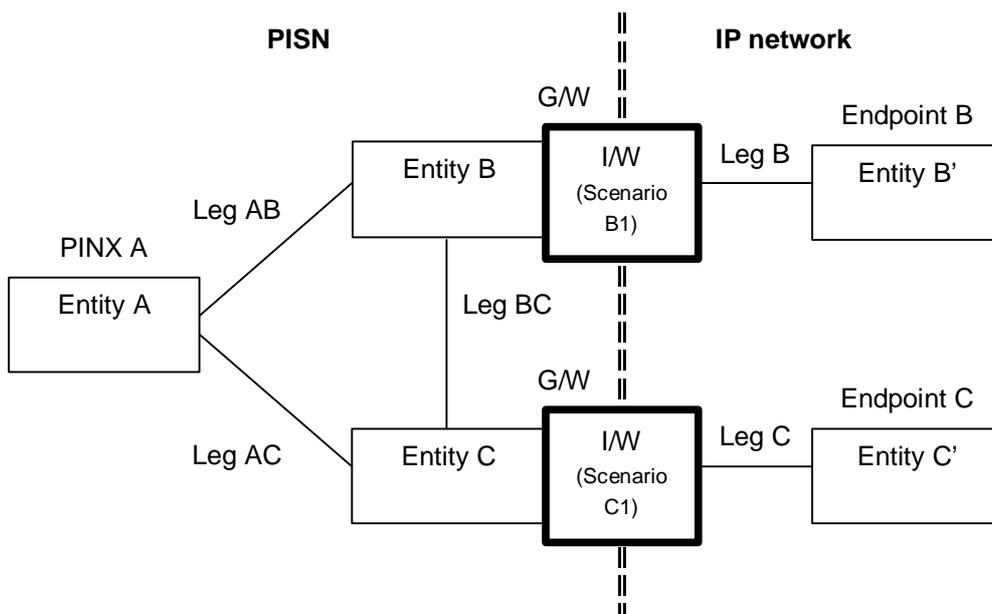


Figure 13: Interworking – transfer by rerouting between PINX A and two gateways

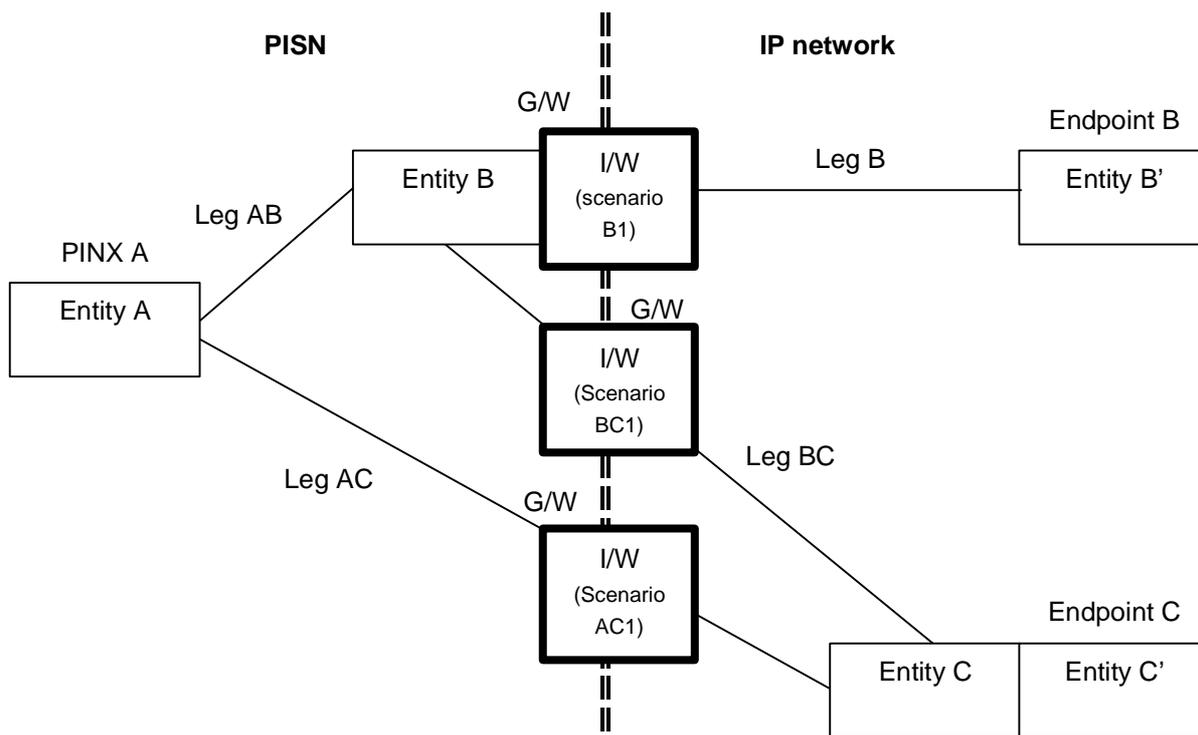


Figure 14: Interworking – transfer by rerouting – between PINX A, entity B in a gateway and entity C in the IP network

If user A and therefore entity A are in the IP network at endpoint A, if user B is in the PISN the gateway between user A's network and user B's network can choose, on receipt of a transfer request from endpoint A, whether to provide entity B (in which case interworking occurs on leg B) or to instruct the PISN to provide entity B (in which case interworking occurs on leg AB). The latter requires support for transfer by rerouting in the PISN.

Similarly, if user C is in the PISN the gateway between user A's network and user C's network can choose, on receipt of a transfer identify request from endpoint A, whether to provide entity C (in which case interworking occurs on leg C) or to instruct the PISN to provide entity C (in which case interworking occurs on leg AC). The latter requires support for transfer by rerouting in the PISN. If the two gateways make different decisions, interworking will also occur on leg BC.

Figures 15 and 16 show the two cases where the two gateways make the same decision. If the two gateways make different decisions (not shown), interworking will also occur on leg BC.

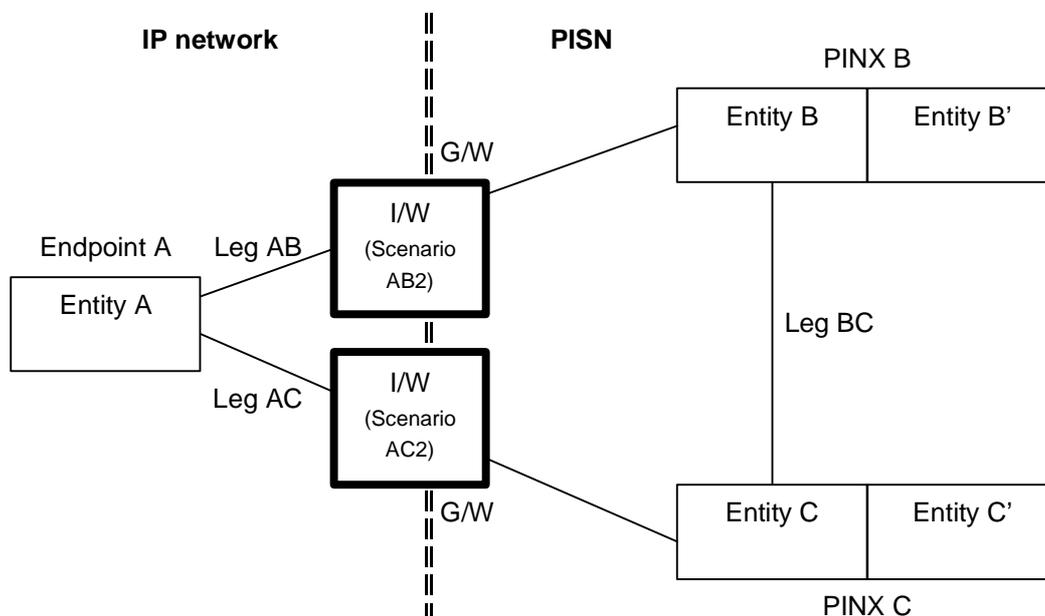


Figure 15: Interworking – transfer by rerouting between endpoint A in the IP network and PINXs B and C

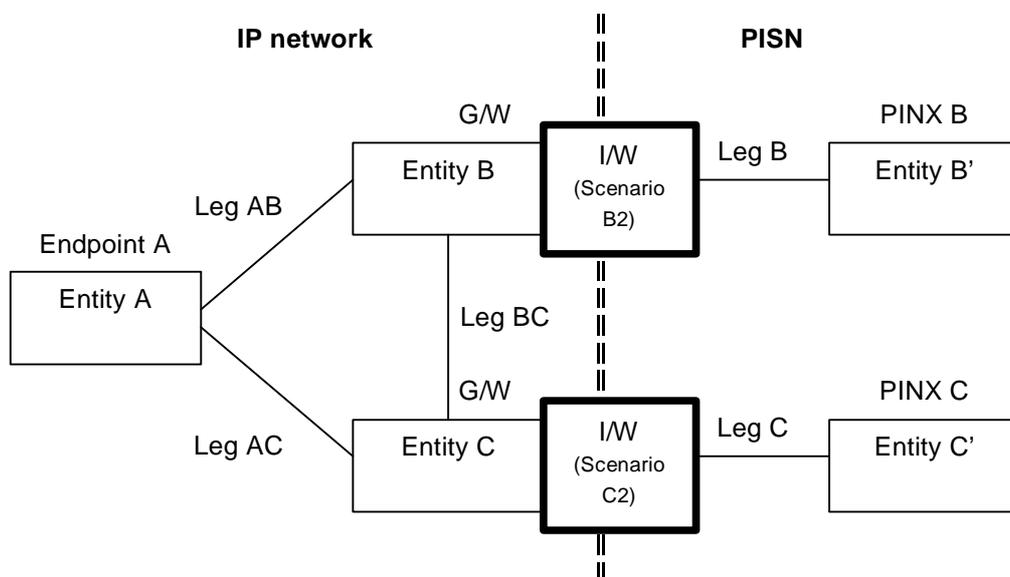


Figure 16: Interworking – transfer by rerouting between endpoint A in the IP network and two gateways

In cases where a gateway can choose whether to provide entity B or entity C functionality, the gateway's decision is an implementation matter. This can, but need not, take account of the user C or user B respectively. The behaviour of entity B or entity C, if provided at the gateway, is outside the scope of the present document and is assumed to be in accordance with the requirements of ECMA-178 (when entity A is in the PISN) or in accordance with the requirements of ITU-T Recommendation H.450.2 (when entity A is in the IP network).

6.1.4.2 Single step call transfer

Entities A*, B' C* and C' are always located in the network of the user concerned. The location of entity B* is determined as follows:

If user A and therefore entity A* are in the QSIG network at PINX A entity B* may be located at PINX A. Interworking will occur on leg B* and/or leg BC*, depending on the location of users B and C.

If user B is in the IP network, the gateway between user A's network and user B's network can choose, on receipt of a transfer request from PINX A, whether to provide entity B* (in which case interworking occurs on leg B*) or to instruct the IP network to provide entity B* (in which case interworking occurs on leg AB*).

Figure 17 shows the case where entity B* is provided by the gateway. Figure 18 shows the case where entity B* is provided by the IP network.

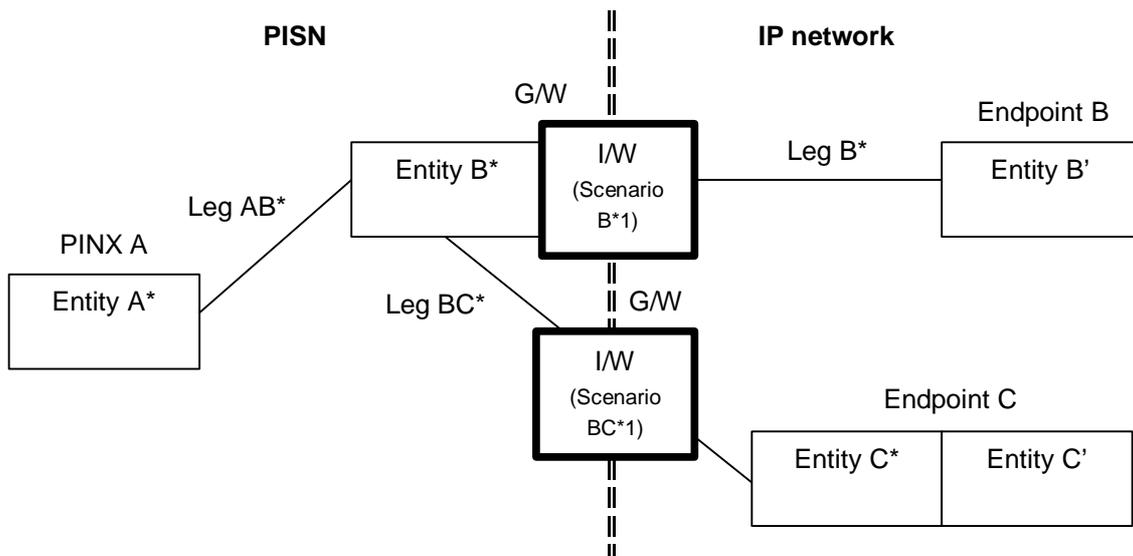


Figure 17: Interworking – single step call transfer in a PISN

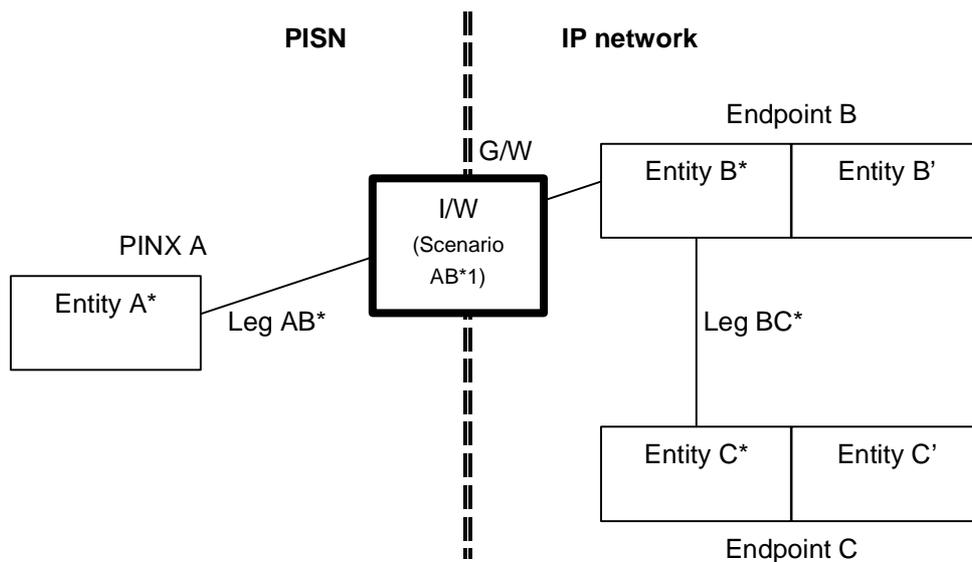


Figure 18: Interworking – single step call transfer between PINX A and endpoints B and C in the IP network

Also, in the case where entity B* is provided by the IP network and user C is in the PISN, interworking will also occur on leg BC*. This case is not shown.

If user A and therefore entity A* are in the IP network at endpoint A, if user B is in the PISN the gateway between user A's network and user B's network can choose, on receipt of a transfer request from endpoint A, whether to provide entity B* (in which case interworking occurs on leg B*) or to instruct the PISN to provide entity B* (in which case interworking occurs on leg AB*). These are shown in figures 19 and 20.

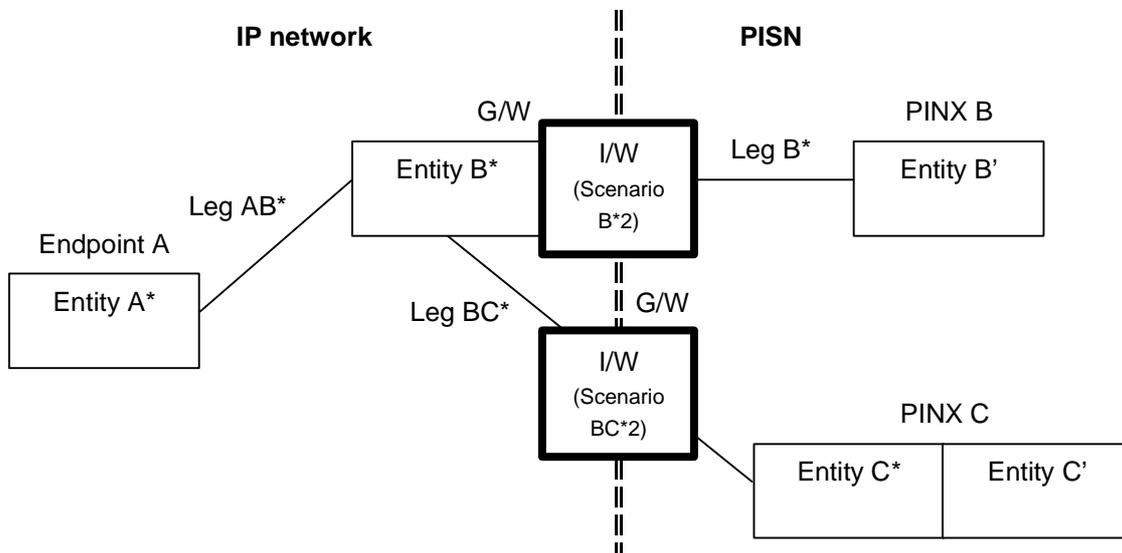


Figure 19: Interworking – single step call transfer between endpoint A in the IP network and two gateways

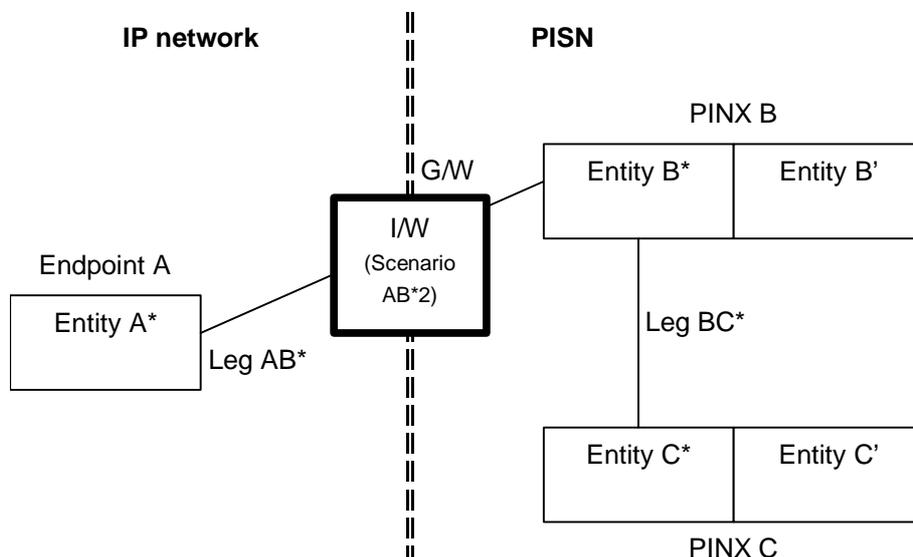


Figure 20: Interworking – single step call transfer between endpoint A in the IP network and PINXs B and C

Also, in the case where entity B* is provided by the PISN and user C is in the IP network, interworking will also occur on leg BC*. This case is not shown.

In cases where a gateway can choose whether to provide entity B* functionality, the gateway's decision is an implementation matter. This can, but need not, take account of the location of user C. The behaviour of entity B*, if provided at the gateway, is outside the scope of the present document and is assumed to be in accordance with the requirements of ECMA-300 (when entity A* is in the PISN) or in accordance with the requirements of ITU-T Recommendation H.450.2 (when entity A* is in the IP network).

6.2 Service architecture for activation, deactivation and interrogation

6.2.1 QSIG service architecture

6.2.1.1 ECMA-178 service architecture

Not applicable.

6.2.1.2 ECMA-300 service architecture

Not applicable.

6.2.2 H.450.2 service architecture

Not applicable.

6.2.3 Scenarios for interworking

Not applicable.

7 Protocol interworking – General requirements

Protocol interworking between H.323 and QSIG for call transfer supplementary services shall be in accordance with ECMA-307, as modified by the requirements of clauses 8 and 9.

When transmitting an APDU in one protocol as a result of receiving the corresponding APDU in the other protocol, the mapping of elements in the received APDU to corresponding elements in the transmitted APDU shall be in accordance with ECMA-307.

8 Protocol interworking – Messages and APDUs

In the rules specified below for the different scenarios, the following shall apply:

- 1) If the required action is to transmit a QSIG or H.323 FACILITY message but the call state does not permit a FACILITY message to be sent at that time, the action to be taken is an implementation matter.
- 2) If the required action is to include an APDU in a transmitted QSIG or H.323 message conditional upon that message being transmitted and that message is not to be transmitted (owing to basic call interworking considerations), the action to be taken is an implementation matter.

Annex B shows in diagrammatic form some typical message sequences for some of the scenarios identified in the present document.

8.1 Scenario AB1

A gateway that supports scenario AB1 shall behave in accordance with the rules of table 1, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a QSIG message from entity A, or receipt of a H.323 message from entity B.

Table 1: Message and APDU handling requirements for scenario AB1

Rule	Condition	Required action
1	Receipt of a QSIG FACILITY message containing a QSIG callTransferInitiate invoke APDU while the QSIG call is in the active state.	Transmit a H.323 FACILITY message containing a H.323 callTransferInitiate invoke APDU if the H.323 call state permits.
2	Receipt of a H.323 RELEASE COMPLETE message containing a H.323 callTransferInitiate return result APDU in response to a H.323 callTransferInitiate invoke APDU.	If a QSIG DISCONNECT message is to be transmitted, include in the QSIG DISCONNECT message a QSIG callTransferInitiate return result APDU.
3	Receipt of a H.323 FACILITY message containing a H.323 callTransferInitiate return error APDU in response to a H.323 callTransferInitiate invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferInitiate return error APDU if the QSIG call state permits.

8.2 Scenario AB2

A gateway that supports scenario AB2 shall behave in accordance with the rules of table 2, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a H.323 message from entity A, or receipt of a QSIG message from entity B.

Table 2: Message and APDU handling requirements for scenario AB2

Rule	Condition	Required action
1	Receipt of a H.323 FACILITY message containing a H.323 callTransferInitiate invoke APDU while the H.323 call is in the active state.	If the callIdentity element in the H.323 callTransferInitiate invoke APDU is not empty, transmit a QSIG FACILITY message containing a QSIG callTransferInitiate invoke APDU if the QSIG call state permits. If the callIdentity element in the H.323 callTransferInitiate invoke APDU is empty, refer to the rules in 8.12, or reject the request if single step call transfer is not supported.
2	Receipt of a QSIG DISCONNECT message containing a QSIG callTransferInitiate return result APDU in response to a QSIG callTransferInitiate invoke APDU.	If a H.323 RELEASE COMPLETE message is to be transmitted, include in the H.323 RELEASE COMPLETE message a H.323 callTransferInitiate return result APDU.
3	Receipt of a QSIG FACILITY message containing a QSIG callTransferInitiate return error APDU in response to a QSIG callTransferInitiate invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferInitiate return error APDU if the H.323 call state permits.

8.3 Scenario AC1

A gateway that supports scenario AC1 shall behave in accordance with the rules of table 3, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a QSIG message from entity A, or receipt of a H.323 message from entity C.

Table 3: Message and APDU handling requirements for scenario AC1

Rule	Condition	Required action
1	Receipt of a QSIG FACILITY message containing a QSIG callTransferIdentify invoke APDU while the QSIG call is either in the call received state or in the active state.	Transmit a H.323 FACILITY message containing a H.323 callTransferIdentify invoke APDU if the H.323 call state permits.
2	Receipt of a H.323 FACILITY message containing a H.323 callTransferIdentify return result APDU in response to a H.323 callTransferIdentify invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferIdentify return result APDU if the QSIG call state permits.
3	Receipt of a QSIG FACILITY message containing a QSIG callTransferAbandon invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferAbandon invoke APDU if the H.323 call state permits.
4	Receipt of a H.323 FACILITY message containing a H.323 callTransferIdentify return error APDU in response to a H.323 callTransferIdentify invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferIdentify return error APDU if the QSIG call state permits.

8.4 Scenario AC2

A gateway that supports scenario AC2 shall behave in accordance with the rules of table 4, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a H.323 message from entity A, or receipt of a QSIG message from entity C.

Table 4: Message and APDU handling requirements for scenario AC2

Rule	Condition	Required action
1	Receipt of a H.323 FACILITY message containing a H.323 callTransferIdentify invoke APDU while the H.323 call is either in the call received state or in the active state.	Transmit a QSIG FACILITY message containing a QSIG callTransferIdentify invoke APDU if the QSIG call state permits.
2	Receipt of a QSIG FACILITY message containing a QSIG callTransferIdentify return result APDU in response to a QSIG callTransferIdentify invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferIdentify return result APDU if the H.323 call state permits.
3	Receipt of a H.323 FACILITY message containing a H.323 callTransferAbandon invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferAbandon invoke APDU if the QSIG call state permits.
4	Receipt of a QSIG FACILITY message containing a QSIG callTransferIdentify return error APDU in response to a QSIG callTransferIdentify invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferIdentify return error APDU if the H.323 call state permits.

8.5 Scenario BC1

A gateway that supports scenario BC1 shall behave in accordance with the rules of table 5, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a QSIG message from entity B, or receipt of a H.323 message from entity C.

Table 5: Message and APDU handling requirements for scenario BC1

Rule	Condition	Required action
1	Receipt of a QSIG SETUP message containing a QSIG callTransferSetup invoke APDU.	If a H.323 SETUP message is to be transmitted, include in the H.323 SETUP message a H.323 callTransferSetup invoke APDU. If the QSIG SETUP message also contains a QSIG callTransferUpdate invoke APDU, include a H.323 callTransferUpdate invoke APDU in the H.323 SETUP message.
2	Receipt of a H.323 ALERTING message containing a H.323 callTransferSetup return result APDU in response to a H.323 callTransferSetup invoke APDU.	If a QSIG ALERTING message is to be transmitted, include in the QSIG ALERTING message a QSIG callTransferSetup return result APDU. If the H.323 ALERTING message also contains a H.323 callTransferUpdate invoke APDU, include a QSIG callTransferUpdate invoke APDU in the QSIG ALERTING message.
3	Receipt of a H.323 CONNECT message containing a H.323 callTransferSetup return result APDU in response to a H.323 callTransferSetup invoke APDU.	If a QSIG CONNECT message is to be transmitted, include in the QSIG CONNECT message a QSIG callTransferSetup return result APDU. If the H.323 CONNECT message also contains a H.323 callTransferUpdate invoke APDU, include a QSIG callTransferUpdate invoke APDU in the QSIG CONNECT message.
4	Receipt of a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU if the H.323 call state permits.
5	Receipt of a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU if the QSIG call state permits.
6	Receipt of a H.323 RELEASE COMPLETE message containing a H.323 callTransferSetup return error APDU in response to a H.323 callTransferSetup invoke APDU.	If a QSIG DISCONNECT message is to be transmitted, include in the QSIG DISCONNECT message a QSIG callTransferSetup return error APDU.

8.6 Scenario BC2

A gateway that supports scenario BC2 shall behave in accordance with the rules of table 6, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a H.323 message from entity B, or receipt of a QSIG message from entity C.

Table 6: Message and APDU handling requirements for scenario BC2

Rule	Condition	Required action
1	Receipt of a H.323 SETUP message containing a H.323 callTransferSetup invoke APDU.	If the callIdentity element in the H.323 callTransferSetup invoke APDU is not empty, then if a QSIG SETUP message is to be transmitted, include in the QSIG SETUP message a QSIG callTransferSetup invoke APDU. If the H.323 SETUP message also contains a H.323 callTransferUpdate invoke APDU, include a QSIG callTransferUpdate invoke APDU in the QSIG SETUP message. If the callIdentity element in the H.323 callTransferSetup invoke APDU is empty, refer to the rules in clause 8.14, or reject the request if single step call transfer is not supported.
2	Receipt of a QSIG ALERTING message containing a QSIG callTransferSetup return result APDU in response to a QSIG callTransferSetup invoke APDU.	If a H.323 ALERTING message is to be transmitted, include in the H.323 ALERTING message a H.323 callTransferSetup return result APDU. If the QSIG ALERTING message also contains a QSIG callTransferUpdate invoke APDU, include a H.323 callTransferUpdate invoke APDU in the H.323 ALERTING message.
3	Receipt of a QSIG CONNECT message containing a QSIG callTransferSetup return result APDU in response to a QSIG callTransferSetup invoke APDU.	If a H.323 CONNECT message is to be transmitted, include in the H.323 CONNECT message a H.323 callTransferSetup return result APDU. If the QSIG CONNECT message also contains a QSIG callTransferUpdate invoke APDU, include a H.323 callTransferUpdate invoke APDU in the H.323 CONNECT message.
4	Receipt of a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU if the H.323 call state permits.
5	Receipt of a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU if the QSIG call state permits.
6	Receipt of a QSIG call clearing message containing a QSIG callTransferSetup return error APDU in response to a QSIG callTransferSetup invoke APDU.	If a H.323 RELEASE COMPLETE message is to be transmitted, include in the H.323 RELEASE COMPLETE message a H.323 callTransferSetup return error APDU.

8.7 Scenario B1

A gateway that supports scenario B1 shall behave in accordance with the rules of table 7, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a QSIG message from entity B, or receipt of a H.323 message from entity B'.

Table 7: Message and APDU handling requirements for scenario B1

Rule	Condition	Required action
1	Receipt of a QSIG FACILITY message containing a QSIG callTransferComplete invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferComplete invoke APDU if the H.323 call state permits. If the QSIG FACILITY message also contains a QSIG callTransferUpdate APDU, then include a H.323 callTransferUpdate invoke APDU in the H.323 FACILITY message.
2	Receipt of a QSIG FACILITY message containing a QSIG callTransferUpdate invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferUpdate invoke APDU if the H.323 call state permits.
3	Receipt of a H.323 FACILITY message containing a H.323 callTransferUpdate invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferUpdate invoke APDU if the QSIG call state permits.
4	Receipt of a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU if the H.323 call state permits.
5	Receipt of a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU if the QSIG call state permits.
6	Receipt of a QSIG FACILITY message containing a QSIG callTransferActive invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferActive invoke APDU if the H.323 call state permits.

8.8 Scenario B2

A gateway that supports scenario B2 shall behave in accordance with the rules of table 8, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a QSIG message from entity B', or receipt of a H.323 message from entity B.

Table 8: Message and APDU handling requirements for scenario B2

Rule	Condition	Required action
1	Receipt of a H.323 FACILITY message containing a H.323 callTransferComplete invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferComplete invoke APDU if the QSIG call state permits. If the H.323 FACILITY message also contains a H.323 callTransferUpdate APDU, then include a QSIG callTransferUpdate invoke APDU in the QSIG FACILITY message.
2	Receipt of a QSIG FACILITY message containing a QSIG callTransferUpdate invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferUpdate invoke APDU if the H.323 call state permits.
3	Receipt of a H.323 FACILITY message containing a H.323 callTransferUpdate invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferUpdate invoke APDU if the QSIG call state permits.
4	Receipt of a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU if the H.323 call state permits.
5	Receipt of a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU if the QSIG call state permits.
6	Receipt of a H.323 FACILITY message containing a H.323 callTransferActive invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferActive invoke APDU if the H.323 call state permits.

8.9 Scenario C1

A gateway that supports scenario C1 shall behave in accordance with the rules of table 9, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a QSIG message from entity C, or receipt of a H.323 message from entity C'.

Table 9: Message and APDU handling requirements for scenario C1

Rule	Condition	Required action
1	Receipt of a QSIG FACILITY message containing a QSIG callTransferComplete invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferComplete invoke APDU if the H.323 call state permits. If the QSIG FACILITY message also contains a QSIG callTransferUpdate APDU, then include a H.323 callTransferUpdate invoke APDU in the H.323 FACILITY message.
2	Receipt of a QSIG FACILITY message containing a QSIG callTransferUpdate invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferUpdate invoke APDU if the H.323 call state permits.
3	Receipt of a H.323 FACILITY message containing a H.323 callTransferUpdate invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferUpdate invoke APDU if the QSIG call state permits.
4	Receipt of a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU if the H.323 call state permits.
5	Receipt of a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU if the QSIG call state permits.

8.10 Scenario C2

A gateway that supports scenario C2 shall behave in accordance with the rules of table 10, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a QSIG message from entity C', or receipt of a H.323 message from entity C.

Table 10: Message and APDU handling requirements for scenario C2

Rule	Condition	Required action
1	Receipt of a H.323 FACILITY message containing a H.323 callTransferComplete invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferComplete invoke APDU if the QSIG call state permits. If the H.323 FACILITY message also contains a H.323 callTransferUpdate APDU, then include a QSIG callTransferUpdate invoke APDU in the QSIG FACILITY message.
2	Receipt of a QSIG FACILITY message containing a QSIG callTransferUpdate invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferUpdate invoke APDU if the H.323 call state permits.
3	Receipt of a H.323 FACILITY message containing a H.323 callTransferUpdate invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferUpdate invoke APDU if the QSIG call state permits.
4	Receipt of a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU if the H.323 call state permits.
5	Receipt of a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU if the QSIG call state permits.

8.11 Scenario AB*1

A gateway that supports scenario AB*1 shall behave in accordance with the rules of table 11, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a QSIG message from entity A*, or receipt of a H.323 message from entity B*.

Table 11: Message and APDU handling requirements for scenario AB*1

Rule	Condition	Required action
1	Receipt of a QSIG FACILITY message containing a QSIG ssctInitiate invoke APDU while the QSIG call is in the active state.	Transmit a H.323 FACILITY message containing a H.323 callTransferInitiate invoke APDU if the H.323 call state permits.
2	Receipt of a H.323 RELEASE COMPLETE message containing a H.323 callTransferInitiate return result APDU in response to a H.323 callTransferInitiate invoke APDU.	If a QSIG DISCONNECT message is to be transmitted, include in the QSIG DISCONNECT message a QSIG ssctInitiate return result APDU.
3	Receipt of a H.323 FACILITY message containing a H.323 callTransferInitiate return error APDU in response to a H.323 callTransferInitiate invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG ssctInitiate return error APDU if the QSIG call state permits.

8.12 Scenario AB*2

A gateway that supports scenario AB*2 shall behave in accordance with the rules of table 12, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a H.323 message from entity A*, or receipt of a QSIG message from entity B*.

Table 12: Message and APDU handling requirements for scenario AB*2

Rule	Condition	Required action
1	Receipt of a H.323 FACILITY message containing a H.323 callTransferInitiate invoke APDU while the H.323 call is in the active state.	If the callIdentity element in the H.323 callTransferInitiate invoke APDU is empty, transmit a QSIG FACILITY message containing a QSIG ssctInitiate invoke APDU if the QSIG call state permits. If callIdentity element in the H.323 callTransferInitiate invoke APDU is not empty, refer to the rules in clause 8.2, or reject the request if call transfer by consultation is not supported.
2	Receipt of a QSIG DISCONNECT message containing a QSIG ssctInitiate return result APDU in response to a QSIG ssctInitiate invoke APDU.	If a H.323 RELEASE COMPLETE message is to be transmitted, include in the H.323 RELEASE COMPLETE message a H.323 callTransferInitiate return result APDU.
3	Receipt of a QSIG FACILITY message containing a QSIG ssctInitiate return error APDU in response to a QSIG ssctInitiate invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferInitiate return error APDU if the H.323 call state permits.

8.13 Scenario BC*1

A gateway that supports scenario BC*1 shall behave in accordance with the rules of table 13, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a QSIG message from entity B*, or receipt of a H.323 message from entity C*.

Table 13: Message and APDU handling requirements for scenario BC*1

Rule	Condition	Required action
1	Receipt of a QSIG SETUP message containing a QSIG ssctSetup invoke APDU.	If a H.323 SETUP message is to be transmitted, include in the H.323 SETUP message a H.323 callTransferSetup invoke APDU.
2	Receipt of a H.323 ALERTING message containing a H.323 callTransferSetup return result APDU in response to a H.323 callTransferSetup invoke APDU.	Discard the H.323 callTransferSetup return result APDU. If the H.323 ALERTING message contains a H.323 callTransferUpdate invoke APDU, then if a QSIG ALERTING message is to be transmitted, include in the QSIG ALERTING message a QSIG callTransferUpdate invoke APDU.
3	Receipt of a H.323 CONNECT message containing a H.323 callTransferSetup return result APDU in response to a H.323 callTransferSetup invoke APDU.	Discard the H.323 callTransferSetup return result APDU. If the H.323 CONNECT message contains a H.323 callTransferUpdate invoke APDU, then if a QSIG CONNECT message is to be transmitted, include in the QSIG CONNECT message a QSIG callTransferUpdate invoke APDU.
4	Receipt of a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU if the H.323 call state permits.
5	Receipt of a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU if the QSIG call state permits.
6	Receipt of a H.323 RELEASE COMPLETE message containing a H.323 callTransferSetup return error APDU in response to a H.323 callTransferSetup invoke APDU.	Discard the H.323 callTransferSetup return error APDU.

8.14 Scenario BC*2

A gateway that supports scenario BC*2 shall behave in accordance with the rules of table 14, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a H.323 message from entity B*, or receipt of a QSIG message from entity C*.

Table 14: Message and APDU handling requirements for scenario BC*2

Rule	Condition	Required action
1	Receipt of a H.323 SETUP message containing a H.323 callTransferSetup invoke APDU.	If the callIdentity element in the H.323 callTransferSetup invoke APDU is empty, then if a QSIG SETUP message is to be transmitted, include in the QSIG SETUP message a QSIG ssctSetup invoke APDU. If callIdentity element in the H.323 callTransferSetup invoke APDU is not empty, refer to the rules in clause 8.6, or reject the request if call transfer by consultation is not supported.
2	Receipt of a QSIG ALERTING message in response to a QSIG ssctSetup invoke APDU.	If a H.323 ALERTING message is to be transmitted, include in the H.323 ALERTING message a H.323 callTransferSetup return result APDU. If the QSIG ALERTING message contains a QSIG callTransferUpdate invoke APDU, include a H.323 callTransferUpdate invoke APDU in the H.323 ALERTING message.
3	Receipt of a QSIG CONNECT message in response to a QSIG ssctSetup invoke APDU.	If a H.323 CONNECT message is to be transmitted and a H.323 callTransferSetup return result APDU has not already been included in a H.323 ALERTING message, then include in the H.323 CONNECT message a H.323 callTransferSetup return result APDU. If the QSIG CONNECT message contains a QSIG callTransferUpdate invoke APDU, include a H.323 callTransferUpdate invoke APDU in the H.323 CONNECT message.
4	Receipt of a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU if the H.323 call state permits.
5	Receipt of a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU if the QSIG call state permits.
6	Receipt of a QSIG call clearing message in response to a QSIG ssctSetup invoke APDU.	If a H.323 RELEASE COMPLETE message is to be transmitted, include in the H.323 RELEASE COMPLETE message a H.323 callTransferSetup return error APDU.

8.15 Scenario B*1

A gateway that supports scenario B*1 shall behave in accordance with the rules of table 15, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a QSIG message from entity B*, or receipt of a H.323 message from entity B'.

Table 15: Message and APDU handling requirements for scenario B*1

Rule	Condition	Required action
1	Receipt of a QSIG FACILITY message containing a QSIG callTransferComplete invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferComplete invoke APDU if the H.323 call state permits. If the QSIG FACILITY message also contains a QSIG callTransferUpdate APDU, then include a H.323 callTransferUpdate invoke APDU in the H.323 FACILITY message.
2	Receipt of a QSIG FACILITY message containing a QSIG ssctPostDial invoke APDU.	Discard the QSIG ssctPostDial invoke APDU. If further APDUs are present, then subject to rules 3, 5 and 7, transmit a H.323 FACILITY message if the H.323 call state permits.
3	Receipt of a QSIG FACILITY message containing a QSIG callTransferUpdate invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferUpdate invoke APDU if the H.323 call state permits.
4	Receipt of a H.323 FACILITY message containing a H.323 callTransferUpdate invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferUpdate invoke APDU if the QSIG call state permits.
5	Receipt of a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU if the H.323 call state permits.
6	Receipt of a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU if the QSIG call state permits.
7	Receipt of a QSIG FACILITY message containing a QSIG callTransferActive invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferActive invoke APDU if the H.323 call state permits.

8.16 Scenario B*2

A gateway that supports scenario B*2 shall behave in accordance with the rules of table 16, by carrying out the required action when a given condition occurs. Each condition applies to the receipt of a QSIG message from entity B*, or receipt of a H.323 message from entity B'.

Table 16: Message and APDU handling requirements for scenario B*2

Rule	Condition	Required action
1	Receipt of a H.323 FACILITY message containing a H.323 callTransferComplete invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferComplete invoke APDU if the QSIG call state permits. If the H.323 FACILITY message also contains a H.323 callTransferUpdate APDU, then include a QSIG callTransferUpdate invoke APDU in the QSIG FACILITY message.
2	Receipt of a QSIG FACILITY message containing a QSIG callTransferUpdate invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 callTransferUpdate invoke APDU if the H.323 call state permits.
3	Receipt of a H.323 FACILITY message containing a H.323 callTransferUpdate invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferUpdate invoke APDU if the QSIG call state permits.
4	Receipt of a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU.	Transmit a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU if the H.323 call state permits.
5	Receipt of a H.323 FACILITY message containing a H.323 subaddressTransfer invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG subaddressTransfer invoke APDU if the QSIG call state permits.
6	Receipt of a H.323 FACILITY message containing a H.323 callTransferActive invoke APDU.	Transmit a QSIG FACILITY message containing a QSIG callTransferActive invoke APDU if the H.323 call state permits.

9 Protocol interworking – Content of APDUs

This clause contains the requirements for the mapping of elements that are not covered by the general requirements in clause 7.

Rules are provided only for elements that are mandatory in at least one of the protocols. Optional elements may be discarded if received.

9.1 APDU content mapping from QSIG to H.323

9.1.1 QSIG ssctInitiate invoke APDU mapping to H.323 callTransferInitiate invoke APDU

A gateway that supports scenario AB*1, when transmitting a H.323 callTransferInitiate invoke APDU as a result of receiving a QSIG ssctInitiate invoke APDU, shall map elements in accordance with table 17.

Table 17: QSIG ssctInitiate invoke APDU mapping to H.323 callTransferInitiate invoke APDU

QSIG element name "(M)" denotes mandatory element	H.323 element name "(M)" denotes mandatory element	Mapping requirement
N/A	callIdentity (M)	Encode as empty (size 0) to denote invocation of single step call transfer.
transferredAddress (M)	N/A	Discard.
awaitConnect (M)	N/A	Discard.

9.1.2 QSIG ssctSetup invoke APDU mapping to H.323 callTransferSetup invoke APDU

A gateway that supports scenario BC*1, when transmitting a H.323 callTransferSetup invoke APDU as a result of receiving a QSIG ssctSetup invoke APDU, shall map elements in accordance with table 18.

Table 18: QSIG ssctSetup invoke APDU mapping to H.323 callTransferSetup invoke APDU

QSIG element name "(M)" denotes mandatory element	H.323 element name "(M)" denotes mandatory element	Mapping requirement
N/A	callIdentity (M)	Encode as empty (size 0).

9.2 APDU content mapping from H.323 to QSIG

9.2.1 H.323 callTransferInitiate invoke APDU mapping to QSIG ssctInitiate invoke APDU

A gateway that supports scenario AB*2, when transmitting a QSIG ssctInitiate invoke APDU as a result of receiving a H.323 callTransferInitiate invoke APDU, shall map elements in accordance with table 19.

Table 19: H.323 callTransferInitiate invoke APDU mapping to QSIG ssctInitiate invoke APDU

H.323 element name "(M)" denotes mandatory element	QSIG element name "(M)" denotes mandatory element	Mapping requirement
callIdentity (M)	N/A	Discard.
N/A	transferredAddress (M)	The availability of the information to be included in this element will depend on implementation. Include the information if available or include the indication "notAvailableDueToInterworking" if the information is not available.
N/A	awaitConnect	Encode with the value set to FALSE, i.e. release the original call on receipt of the ALERTING message.

9.2.2 H.323 callTransferSetup invoke APDU mapping to QSIG ssctSetup invoke APDU

A gateway that supports scenario BC*2, when transmitting a QSIG ssctSetup invoke APDU as a result of receiving a H.323 callTransferSetup invoke APDU, shall map elements in accordance with table 20.

Table 20: H.323 callTransferSetup invoke APDU mapping to QSIG ssctSetup invoke APDU

H.323 element name "(M)" denotes mandatory element	QSIG element name "(M)" denotes mandatory element	Mapping requirement
callIdentity (M)	N/A	Discard.

Annex A (normative): Implementation Conformance Statement (ICS) proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the ICS proforma in this annex so that it can be used for its intended purposes and may further publish the completed ICS.

A.1 Introduction

The supplier of an implementation which is claimed to conform to the present document shall complete the following Implementation Conformance Statement (ICS) proforma.

A completed ICS proforma is the ICS for the implementation in question. The ICS is a statement of which capabilities and options have been implemented for a given specification.

The ICS can have a number of uses, including use:

- by the implementor, as a check list for implementations to reduce the risk of unintended non-conformance, e.g. through oversight;
- by the supplier and acquirer, or potential acquirer, of the implementation, as a detailed indication of the capabilities of the implementation, stated relative to the common basis for understanding provided by the Standard's ICS proforma;
- by the user or potential user of the implementation, as a basis for initially checking the possibility of interworking with another implementation - while interworking can never be guaranteed, failure to interwork can often be predicted from incompatible ICS;
- by a tester, as the basis for selecting appropriate tests against which to assess the claim for conformance of the implementation.

A.2 Instructions for completing the ICS proforma

A.2.1 General structure of the ICS proforma

The ICS proforma is a fixed format questionnaire divided into clauses each containing a group of individual items. Each item is identified by an item reference, the description of the item (question to be answered), and the reference(s) to the clause(s) that specifies (specify) the item in the main body of the present document.

The "Conditions for Status" column contains a specification, if appropriate, of the predicate upon which a conditional status is based. The indication of an item reference in this column indicates a simple-predicate condition (support of this item is dependent on the support marked for the referenced item).

The "Status" column indicates whether an item is applicable and if so whether support is mandatory or optional. The following terms are used:

I	irrelevant or out-of-scope - this capability is outside the scope of the standard to which this ICS proforma applies and is not subject to conformance testing in this context;
M	mandatory (the capability is required for conformance to the standard);
N/A	not applicable - in the given context, it is impossible to use the capability; no answer in the support column is required;
O	optional (the capability is not required for conformance to the standard, but if the capability is implemented it is required to conform to the specification in the present document);

- O.<n> qualified optional - in this case, <n> is an integer that identifies a unique group of related optional items; if no additional qualification is indicated, the support of at least one of the optional items is required for conformance to the present document; otherwise, the qualification and logic of the selection among the optional items is defined below the table explicitly;
- X excluded or prohibited - there is a requirement not to use this capability in a given context.

Answers to the questionnaire items are to be provided in the "Support" column, by simply marking an answer to indicate a restricted choice (Yes, No or N/A). In specific cases, the indication of explicit values may be requested. Where a support column box is left blank, no answer is required.

If a "prerequisite line" (see clause A.2.4) is used after a clause heading or table title, and its predicate is false, no answer is required for the whole clause or table, respectively.

A.2.2 Additional information

Items of additional information allow a supplier to provide further information intended to assist the interpretation of the ICS. It is not intended or expected that a large quantity will be supplied, and an ICS can be considered complete without any such information. Examples might be an outline of the ways in which a (single) implementation can be set up to operate in a variety of environments and configurations.

References to items of additional information may be entered next to any answer in the questionnaire, and may be included in items of exception information.

A.2.3 Exception information

It may occasionally happen that a supplier will wish to answer an item with mandatory or prohibited status (after any conditions have been applied) in a way that conflicts with the indicated requirement. No pre-printed answer will be found in the Support column for this. Instead, the supplier is required to write into the support column an x.<i> reference to an item of exception information, and to provide the appropriate rationale in the Exception item itself.

An implementation for which an exception item is required in this way does not conform to the present document. A possible reason for the situation described above is that a defect in the standard has been reported, a correction for which is expected to change the requirement not met by the implementation.

A.2.4 Further indications of the ICS proforma tables

In addition to the columns of a table, the following information may be indicated:

"Prerequisite line"

A prerequisite line after a clause heading or table title indicates that the whole clause or the whole table is not required to be completed if the predicate is false.

"Qualification"

At the end of a table, a detailed qualification for a group of optional items may be indicated, as specified in the description of the status "qualified optional" in clause A.2.1.

"Comments"

This box at the end of a table allows a supplier to enter any comments to that table. Comments may also be provided separately (without using this box).

A.3 Identification of the implementation

A.3.1 Implementation identification

Supplier (see note 1)	
Contact point for queries about the ICS (see note 1)	
Implementation Name(s) and Version(s) (see notes 1 and 2)	
Other information necessary for full identification - e.g. name(s) and version(s) for machines and/or operating systems; System name(s)	
NOTE 1: Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirement for full identification.	
NOTE 2: The terms Name and Version should be interpreted appropriately to correspond with a suppliers terminology (e.g. Type, Series, Model).	

A.3.2 Specification for which this ICS applies

Title	Corporate Telecommunication Networks (CN) – Signalling interworking between QSIG and H.323 – Call Transfer supplementary services
Version	1.2.1
Corrigenda Implemented (if applicable)	
Addenda Implemented (if applicable)	
Amendments Implemented (if applicable)	
Have any exception items been required ?	No[] Yes[] (The answer Yes means that the implementation does not conform to the present document) (see note)
Date of Statement	
NOTE: In this case, an explanation shall be given of the nature of non-conformance either below or on a separate sheet of paper. Nature of non-conformance (if applicable):	

A.4 Major capabilities

Table A.1: Major capabilities

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MC1	support transfer by consultation?		O.1		[]Yes []No
MC2	support single step call transfer?		O.1		[]Yes []No
MC3	support QSIG transfer by join?	MC1	M	ECMA-178	[]Yes
MC4	support QSIG transfer by rerouteing?	MC1	O	ECMA-178	[]Yes []No
MC5	support QSIG single step call transfer?	MC2	M	ECMA-300	[]Yes
MC6	support H.450.2 transfer by consultation?	MC1	M	H.450.2	[]Yes
MC7	support H.450.2 Single Step call transfer?	MC2	M	H.450.2	[]Yes
MC8	support provision of entity B for handling transfer by rerouteing requests received from the PISN?	MC4	O	6.1.4.1	[]Yes []No

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MC9	support provision of entity C for handling transfer by rerouting identify requests from the PISN?	MC4	O	6.1.4.1	[]Yes []No
MC10	support provision of entity B for handling transfer by consultation requests received from the IP network?	MC6 AND MC4 MC6 AND NOT MC4	O M	6.1.4.1	[]Yes []No []Yes
MC11	support provision of entity C for handling transfer by consultation requests received from the IP network?	MC6 AND MC4 MC6 AND NOT MC4	O M	6.1.4.1	[]Yes []No []Yes
MC12	support provision of entity B* for handling single step call transfer requests received from the PISN?	MC2	O	6.1.4.2	[]Yes []No
MC13	support provision of entity C* for handling single step call transfer requests from the PISN?	MC2	O	6.1.4.2	[]Yes []No
MC14	support provision of entity B* for handling single step call transfer requests received from the IP network?	MC2	O	6.1.4.2	[]Yes []No
MC15	support provision of entity C* for handling single step call transfer call establishment requests received from the IP network?	MC2	O	6.1.4.2	[]Yes []No
MC16	support scenario AB1?	MC4 AND MC8 MC4 AND NOT MC8	O M	6.1.3.1	[]Yes []No []Yes
MC17	support scenario AB2?	MC4 AND MC10 MC4 AND NOT MC10	O M	6.1.3.1	[]Yes []No []Yes
MC18	support scenario AC1?	MC4 AND MC9 MC4 AND NOT MC9	O M	6.1.3.1	[]Yes []No []Yes
MC19	support scenario AC2?	MC4 AND MC11 MC4 AND NOT MC11	O M	6.1.3.1	[]Yes []No []Yes
MC20	support scenario BC1?	MC4	M	6.1.3.1	[]Yes
MC21	support scenario BC2?	MC4	M	6.1.3.1	[]Yes
MC22	support scenario B1?	MC1	M	6.1.3.1	[]Yes
MC23	support scenario B2?	MC1	M	6.1.3.1	[]Yes
MC24	support scenario C1?	MC1	M	6.1.3.1	[]Yes
MC25	support scenario C2?	MC1	M	6.1.3.1	[]Yes
MC26	support scenario AB*1?	MC2 AND MC12 MC2 AND NOT MC12	O M	6.1.3.2	[]Yes []No []Yes
MC27	support scenario AB*2?	MC2 AND MC14 MC2 AND NOT MC14	O M	6.1.3.2	[]Yes []No []Yes
MC28	support scenario BC*1?	MC2 AND MC13 MC2 AND NOT MC13	O M	6.1.3.2	[]Yes []No []Yes
MC29	support scenario BC*2?	MC2 AND MC15 MC2 AND NOT MC15	O M	6.1.3.2	[]Yes []No []Yes
MC30	support scenario B*1?	MC2	M	6.1.3.2	[]Yes
MC31	support scenario B*2?	MC2	M	6.1.3.2	[]Yes
Comments:					

A.5 General requirements

Table A.2: General requirements for protocol interworking

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
GR1	perform protocol interworking in accordance with ECMA-307?		M	7	[]Yes
Comments:					

A.6 Message and APDU handling

A.6.1 Message and APDU handling for scenario AB1

Table A.3: Message and APDU handling for scenario AB1

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MAB1 1	behave in accordance with rule 1 for scenario AB1?	MC16	M	8.1	[]Yes
MAB1 2	behave in accordance with rule 2 for scenario AB1?	MC16	M	8.1	[]Yes
MAB1 3	behave in accordance with rule 3 for scenario AB1?	MC16	M	8.1	[]Yes

Comments:

A.6.2 Message and APDU handling for scenario AB2

Table A.4: Message and APDU handling for scenario AB2

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MAB2 1	behave in accordance with rule 1 for scenario AB2?	MC17	M	8.2	[]Yes
MAB2 2	behave in accordance with rule 2 for scenario AB2?	MC17	M	8.2	[]Yes
MAB2 3	behave in accordance with rule 3 for scenario AB2?	MC17	M	8.2	[]Yes

Comments:

A.6.3 Message and APDU handling for scenario AC1

Table A.5: Message and APDU handling for scenario AC1

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MAC1 1	behave in accordance with rule 1 for scenario AC1?	MC18	M	8.3	[]Yes
MAC1 2	behave in accordance with rule 2 for scenario AC1?	MC18	M	8.3	[]Yes
MAC1 3	behave in accordance with rule 3 for scenario AC1?	MC18	M	8.3	[]Yes
MAC1 4	behave in accordance with rule 4 for scenario AC1?	MC18	M	8.3	[]Yes

Comments:

A.6.4 Message and APDU handling for scenario AC2

Table A.6: Message and APDU handling for scenario AC2

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MAC2 1	behave in accordance with rule 1 for scenario AC2?	MC19	M	8.4	[]Yes
MAC2 2	behave in accordance with rule 2 for scenario AC2?	MC19	M	8.4	[]Yes
MAC2 3	behave in accordance with rule 3 for scenario AC2?	MC19	M	8.4	[]Yes
MAC2 4	behave in accordance with rule 4 for scenario AC2?	MC19	M	8.4	[]Yes
Comments:					

A.6.5 Message and APDU handling for scenario BC1

Table A.7: Message and APDU handling for scenario BC1

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MBC1 1	behave in accordance with rule 1 for scenario BC1?	MC20	M	8.5	[]Yes
MBC1 2	behave in accordance with rule 2 for scenario BC1?	MC20	M	8.5	[]Yes
MBC1 3	behave in accordance with rule 3 for scenario BC1?	MC20	M	8.5	[]Yes
MBC1 4	behave in accordance with rule 4 for scenario BC1?	MC20	M	8.5	[]Yes
MBC1 5	behave in accordance with rule 5 for scenario BC1?	MC20	M	8.5	[]Yes
MBC1 6	behave in accordance with rule 6 for scenario BC1?	MC20	M	8.4	[]Yes
Comments:					

A.6.6 Message and APDU handling for scenario BC2

Table A.8: Message and APDU handling for scenario BC2

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MBC2 1	behave in accordance with rule 1 for scenario BC2?	MC21	M	8.6	[]Yes
MBC2 2	behave in accordance with rule 2 for scenario BC2?	MC21	M	8.6	[]Yes
MBC2 3	behave in accordance with rule 3 for scenario BC2?	MC21	M	8.6	[]Yes
MBC2 4	behave in accordance with rule 4 for scenario BC2?	MC21	M	8.6	[]Yes
MBC2 5	behave in accordance with rule 5 for scenario BC2?	MC21	M	8.6	[]Yes
MBC2 6	behave in accordance with rule 6 for scenario BC2?	MC21	M	8.6	[]Yes
Comments:					

A.6.7 Message and APDU handling for scenario B1

Table A.9: Message and APDU handling for scenario B1

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MB1 1	behave in accordance with rule 1 for scenario B1?	MC22	M	8.7	[]Yes
MB1 2	behave in accordance with rule 2 for scenario B1?	MC22	M	8.7	[]Yes
MB1 3	behave in accordance with rule 3 for scenario B1?	MC22	M	8.7	[]Yes
MB1 4	behave in accordance with rule 4 for scenario B1?	MC22	M	8.7	[]Yes
MB1 5	behave in accordance with rule 5 for scenario B1?	MC22	M	8.7	[]Yes
MB1 6	behave in accordance with rule 6 for scenario B1?	MC22	M	8.7	[]Yes
Comments:					

A.6.8 Message and APDU handling for scenario B2

Table A.10: Message and APDU handling for scenario B2

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MB2 1	behave in accordance with rule 1 for scenario B2?	MC23	M	8.8	[]Yes
MB2 2	behave in accordance with rule 2 for scenario B2?	MC23	M	8.8	[]Yes
MB2 3	behave in accordance with rule 3 for scenario B2?	MC23	M	8.8	[]Yes
MB2 4	behave in accordance with rule 4 for scenario B2?	MC23	M	8.8	[]Yes
MB2 5	behave in accordance with rule 5 for scenario B2?	MC23	M	8.8	[]Yes
MB2 6	behave in accordance with rule 6 for scenario B2?	MC23	M	8.8	[]Yes
Comments:					

A.6.9 Message and APDU handling for scenario C1

Table A.11: Message and APDU handling for scenario C1

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MC1 1	behave in accordance with rule 1 for scenario C1?	MC24	M	8.9	[]Yes
MC1 2	behave in accordance with rule 2 for scenario C1?	MC24	M	8.9	[]Yes
MC1 3	behave in accordance with rule 3 for scenario C1?	MC24	M	8.9	[]Yes
MC1 4	behave in accordance with rule 4 for scenario C1?	MC24	M	8.9	[]Yes
MC1 5	behave in accordance with rule 5 for scenario C1?	MC24	M	8.9	[]Yes
Comments:					

A.6.10 Message and APDU handling for scenario C2

Table A.12: Message and APDU handling for scenario C2

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MC2 1	behave in accordance with rule 1 for scenario C2?	MC25	M	8.10	[]Yes
MC2 2	behave in accordance with rule 2 for scenario C2?	MC25	M	8.10	[]Yes
MC2 3	behave in accordance with rule 3 for scenario C2?	MC25	M	8.10	[]Yes
MC2 4	behave in accordance with rule 4 for scenario C2?	MC25	M	8.10	[]Yes
MC2 5	behave in accordance with rule 5 for scenario C2?	MC25	M	8.10	[]Yes

Comments:

A.6.11 Message and APDU handling for scenario AB*1

Table A.13: Message and APDU handling for scenario AB*1

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MAB*1 1	behave in accordance with rule 1 for scenario AB*1?	MC26	M	8.11	[]Yes
MAB*1 2	behave in accordance with rule 2 for scenario AB*1?	MC26	M	8.11	[]Yes
MAB*1 3	behave in accordance with rule 3 for scenario AB*1?	MC26	M	8.11	[]Yes

Comments:

A.6.12 Message and APDU handling for scenario AB*2

Table A.14: Message and APDU handling for scenario AB*2

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MAB*2 1	behave in accordance with rule 1 for scenario AB*2?	MC27	M	8.12	[]Yes
MAB*2 2	behave in accordance with rule 2 for scenario AB*2?	MC27	M	8.12	[]Yes
MAB*2 3	behave in accordance with rule 3 for scenario AB*2?	MC27	M	8.12	[]Yes

Comments:

A.6.13 Message and APDU handling for scenario BC*1

Table A.15: Message and APDU handling for scenario BC*1

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MBC*1 1	behave in accordance with rule 1 for scenario BC*1?	MC28	M	8.13	[]Yes
MBC*1 2	behave in accordance with rule 2 for scenario BC*1?	MC28	M	8.13	[]Yes
MBC*1 3	behave in accordance with rule 3 for scenario BC*1?	MC28	M	8.13	[]Yes
MBC*1 4	behave in accordance with rule 4 for scenario BC*1?	MC28	M	8.13	[]Yes
MBC*1 5	behave in accordance with rule 5 for scenario BC*1?	MC28	M	8.13	[]Yes
MBC*1 6	behave in accordance with rule 6 for scenario BC*1?	MC28	M	8.13	[]Yes
Comments:					

A.6.14 Message and APDU handling for scenario BC*2

Table A.16: Message and APDU handling for scenario BC*2

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MBC*2 1	behave in accordance with rule 1 for scenario BC*2?	MC29	M	8.14	[]Yes
MBC*2 2	behave in accordance with rule 2 for scenario BC*2?	MC29	M	8.14	[]Yes
MBC*2 3	behave in accordance with rule 3 for scenario BC*2?	MC29	M	8.14	[]Yes
MBC*2 4	behave in accordance with rule 4 for scenario BC*2?	MC29	M	8.14	[]Yes
MBC*2 5	behave in accordance with rule 5 for scenario BC*2?	MC29	M	8.14	[]Yes
MBC*2 6	behave in accordance with rule 6 for scenario BC*2?	MC29	M	8.14	[]Yes
Comments:					

A.6.15 Message and APDU handling for scenario B*1

Table A.17: Message and APDU handling for scenario B*1

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MB*1 1	behave in accordance with rule 1 for scenario B*1?	MC30	M	8.15	[]Yes
MB*1 2	behave in accordance with rule 2 for scenario B*1?	MC30	M	8.15	[]Yes
MB*1 3	behave in accordance with rule 3 for scenario B*1?	MC30	M	8.15	[]Yes
MB*1 4	behave in accordance with rule 4 for scenario B*1?	MC30	M	8.15	[]Yes
MB*1 5	behave in accordance with rule 5 for scenario B*1?	MC30	M	8.15	[]Yes
MB*1 6	behave in accordance with rule 6 for scenario B*1?	MC30	M	8.15	[]Yes
MB*1 7	behave in accordance with rule 7 for scenario B*1?	MC30	M	8.15	[]Yes
Comments:					

A.6.16 Message and APDU handling for scenario B*2

Table A.18: Message and APDU handling for scenario B*2

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MB*2 1	behave in accordance with rule 1 for scenario B*2?	MC31	M	8.16	[]Yes
MB*2 2	behave in accordance with rule 2 for scenario B*2?	MC31	M	8.16	[]Yes
MB*2 3	behave in accordance with rule 3 for scenario B*2?	MC31	M	8.16	[]Yes
MB*2 4	behave in accordance with rule 4 for scenario B*2?	MC31	M	8.16	[]Yes
MB*2 5	behave in accordance with rule 5 for scenario B*2?	MC31	M	8.16	[]Yes
MB*2 6	behave in accordance with rule 6 for scenario B*2?	MC31	M	8.16	[]Yes
Comments:					

A.7 APDU content mapping

Table A.19: APDU content mapping

Item	Question: Does the implementation...	Conditions for status	Status	Reference	Support
MAP1	behave in accordance with mapping from QSIG ssctInitiate invoke APDUs to H.323 callTransferInitiate invoke APDUs?	MC26	M	9.1.1	[]Yes
MAP2	behave in accordance with mapping from QSIG ssctSetup invoke APDUs to H.323 callTransferSetup invoke APDUs?	MC28	M	9.1.2	[]Yes
MAP3	behave in accordance with mapping from H.323 callTransferInitiate invoke APDUs to QSIG ssctInitiate invoke APDUs?	MC27	M	9.1.3	[]Yes
MAP4	behave in accordance with mapping from H.323 callTransferSetup invoke APDUs to QSIG ssctSetup invoke APDUs?	MC29	M	9.1.4	[]Yes
Comments:					

Annex B (informative): Example message sequence diagrams

This annex contains some examples of typical message sequences for some of the scenarios identified in the present document. Although the examples shown are typical, other valid message sequences are possible.

In the figures, the arrows indicate the direction of messages. For each message, only the message name and the contained APDU (if applicable) are shown. Other message contents are not shown, in particular for unsuccessful attempts at call transfer. The following abbreviations are used:

.inv	invoke APDU
.res	return result APDU

B.1 Scenario AB1 or AB*1

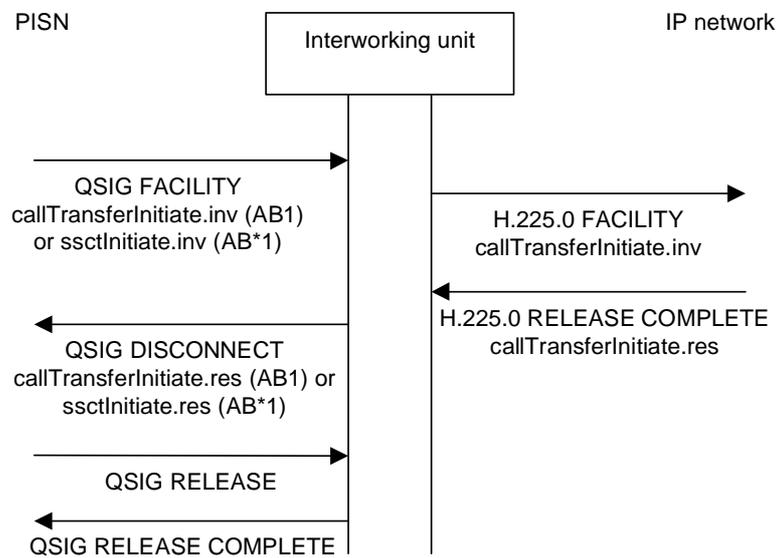


Figure B.1: Example of scenario AB1 or AB*1

B.2 Scenario AB2 or AB*2

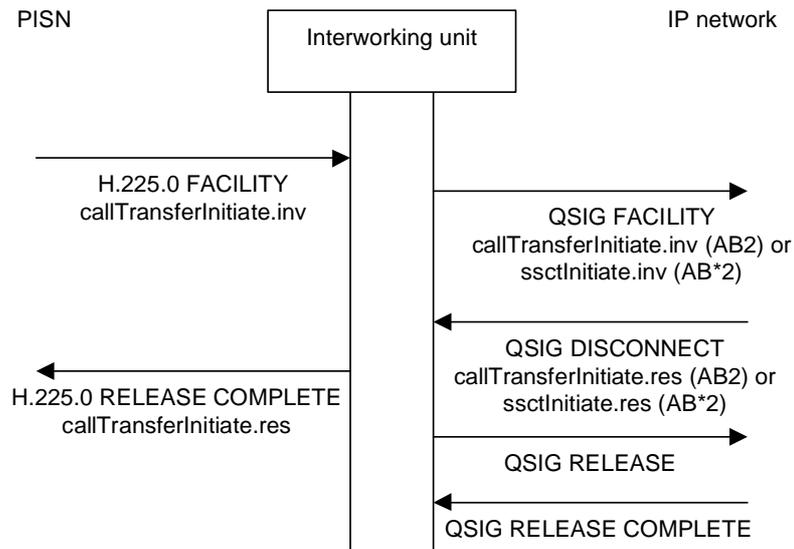


Figure B.2: Example of scenario AB2 or AB*2

B.3 Scenario AC1

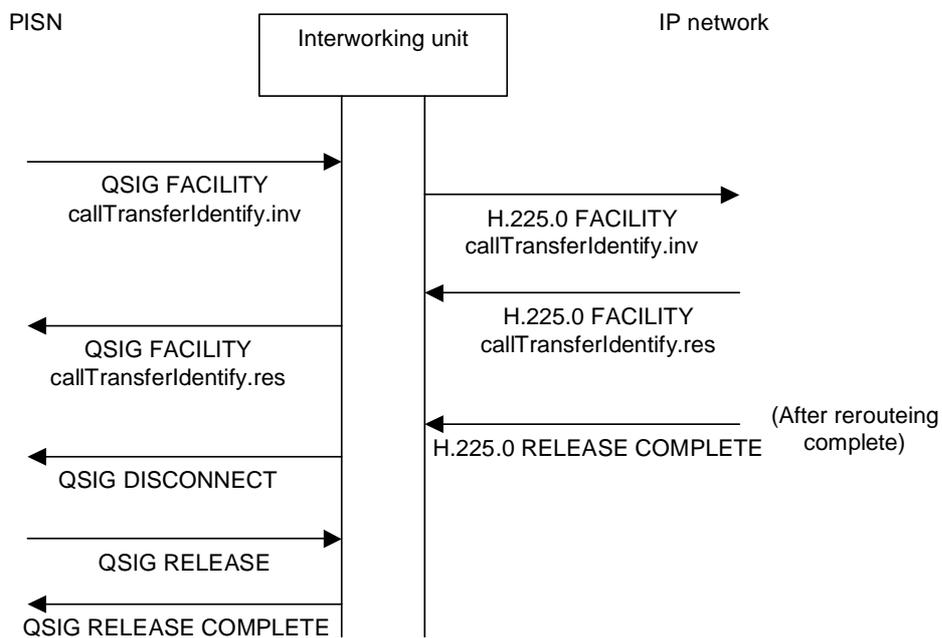


Figure B.3: Example of scenario AC1

B.4 Scenario AC2

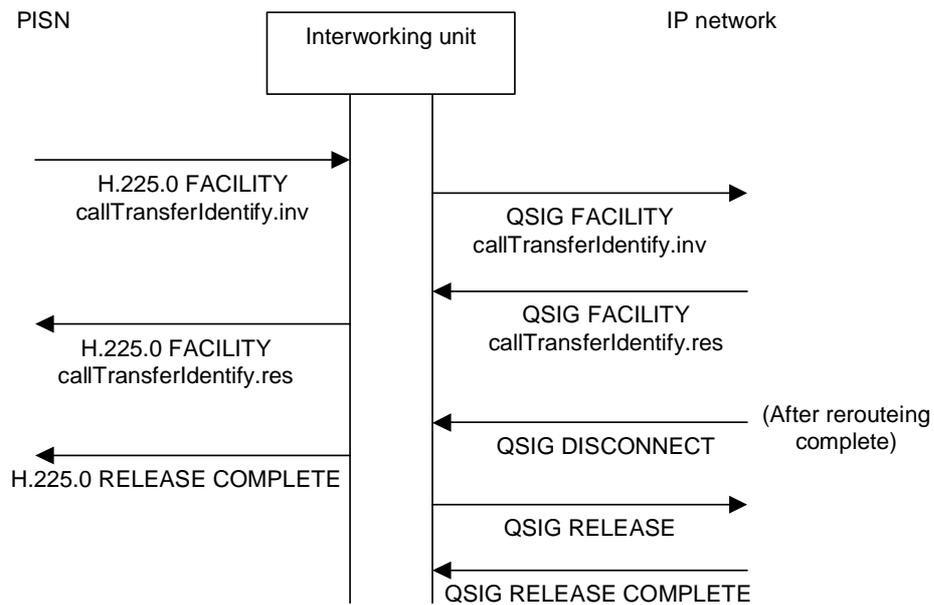


Figure B.4: Example of scenario AC2

B.5 Scenario BC1 or BC*1

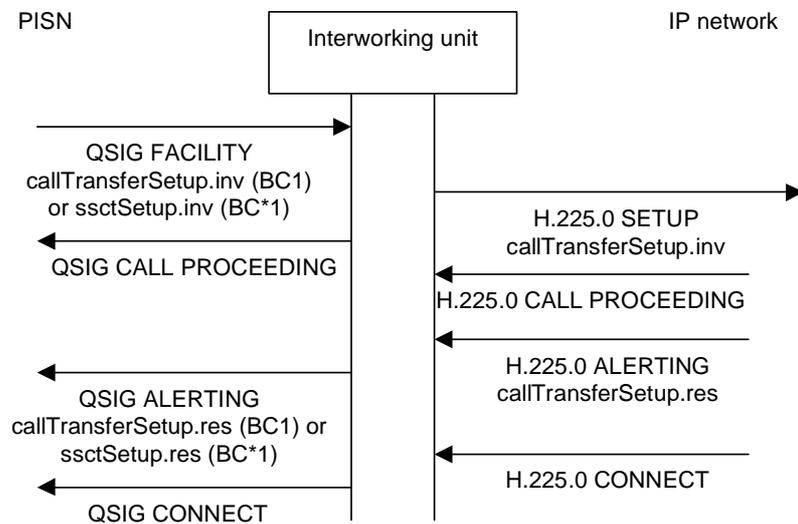


Figure B.5: Example of scenario BC1 or BC*1

B.6 Scenario BC2 or BC*2

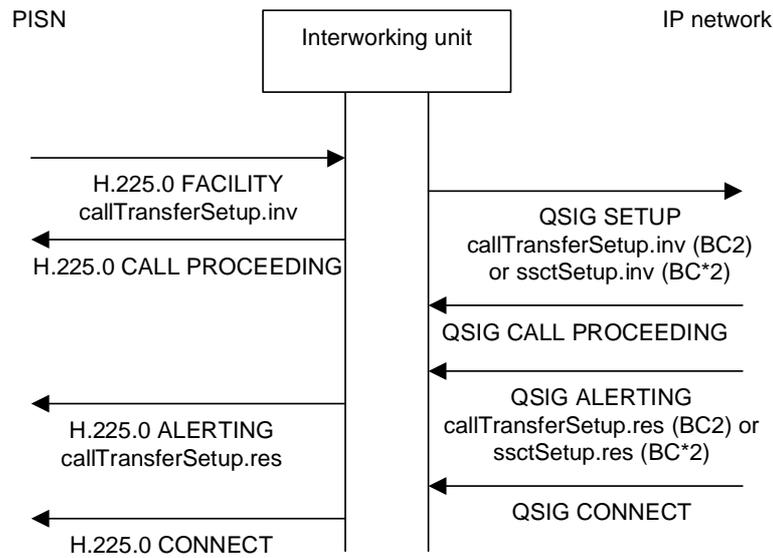


Figure B.6: Example of scenario BC2 or BC*2

B.7 Scenario B1, C1, B*1 or C*1

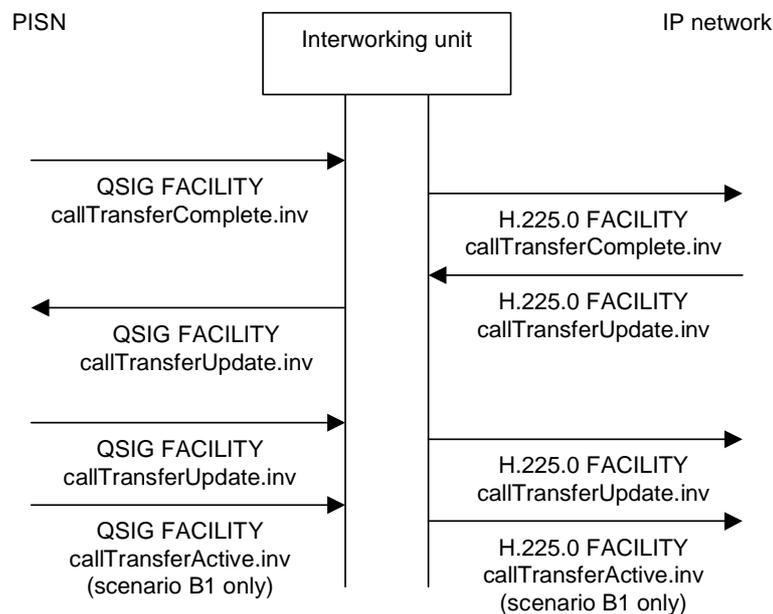


Figure B.7: Example of scenario B1, C1, B*1 or C*1

B.8 Scenario B2, C2, B*2 or C*2

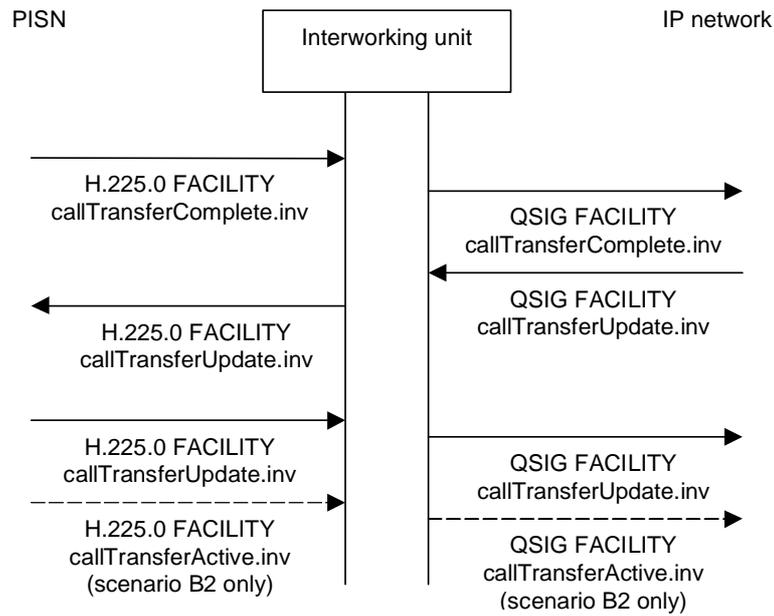


Figure B.8: Example of scenario B2, C2, B*2 or C*2

History

Document history		
V1.1.1	April 2001	Publication
V1.2.1	August 2001	Publication