

ETSI TS 129 128 V17.1.0 (2023-01)



**Universal Mobile Telecommunications System (UMTS);  
LTE;  
Mobility Management Entity (MME)  
and Serving GPRS Support Node (SGSN) interfaces for  
interworking with packet data networks and applications  
(3GPP TS 29.128 version 17.1.0 Release 17)**



---

**Reference**

RTS/TSGC-0429128vh10

---

**Keywords**

LTE,UMTS

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

---

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our  
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

---

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

---

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2023.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	6
1 Scope .....	8
2 References .....	8
3 Definitions and abbreviations.....	9
3.1 Definitions .....	9
3.2 Abbreviations .....	9
4 General Description.....	10
4.1 Introduction .....	10
5 Procedures Description.....	11
5.1 Introduction .....	11
5.2 Report Procedures .....	11
5.2.1 General.....	11
5.2.2 Detailed Behaviour of the MME/SGSN .....	12
5.2.2.0 General .....	12
5.2.2.1 UE Loss of Connectivity .....	13
5.2.2.2 UE Reachability .....	13
5.2.2.3 Location Reporting.....	13
5.2.2.4 Communication Failure.....	13
5.2.2.5 Availability after DDN failure .....	13
5.2.2.6 Idle Status Indication.....	14
5.2.2.7 PDN Connectivity Status .....	14
5.2.3 Detailed Behaviour of the SCEF.....	14
5.2.4 Detailed Behaviour of the IWK-SCEF .....	14
5.3 Event Configuration Procedure .....	14
5.3.1 General.....	14
5.3.2 Detailed Behaviour of the MME/SGSN .....	15
5.3.3 Detailed Behaviour of the IWK-SCEF .....	16
5.4 Event Configuration Procedure for Roaming .....	16
5.4.1 General.....	16
5.4.2 Detailed Behaviour of the IWK-SCEF .....	17
5.4.3 Detailed Behaviour of the MME/SGSN .....	17
5.5 MO-Data Procedure .....	18
5.5.1 General.....	18
5.5.2 Detailed Behaviour of the MME/SGSN .....	19
5.5.3 Detailed Behaviour of the SCEF.....	19
5.5.4 Detailed Behaviour of the IWK-SCEF .....	20
5.6 MT Data Procedure .....	20
5.6.1 General.....	20
5.6.2 Detailed Behaviour of the SCEF.....	21
5.6.3 Detailed Behaviour of the MME/SGSN .....	21
5.6.4 Detailed Behaviour of the IWK-SCEF .....	22
5.7 Connection Management by MME/SGSN Procedure. ....	22
5.7.1 General.....	22
5.7.2 Detailed Behaviour of the MME/SGSN .....	24
5.7.3 Detailed Behaviour of the SCEF.....	25
5.7.4 Detailed Behaviour of the IWK-SCEF .....	26
5.8 Connection Management by SCEF Procedure .....	26
5.8.1 General.....	26
5.8.2 Detailed Behaviour of the SCEF.....	27
5.8.3 Detailed Behaviour of the MME/SGSN .....	27

5.8.4	Detailed Behaviour of the IWK-SCEF .....	28
6	Protocol Specification and Implementation .....	28
6.1	Introduction .....	28
6.1.1	Use of Diameter Base Protocol.....	28
6.1.2	Securing Diameter Messages .....	28
6.1.3	Accounting Functionality .....	28
6.1.4	Use of Sessions .....	28
6.1.5	Transport Protocol .....	29
6.1.6	Routing Considerations.....	29
6.1.6.1	Routing Considerations for Monitoring Event related Requests .....	29
6.1.6.2	Routing Considerations for Non-IP Data Related Requests.....	29
6.1.6.3	Handling of the Vendor-Specific-Application-Id AVP.....	30
6.1.7	Advertising Application Support .....	30
6.1.8	Diameter Application Identifier .....	30
6.1.9	Use of the Supported-Features AVP .....	30
6.2	Commands.....	31
6.2.1	Introduction.....	31
6.2.2	Command-Code values.....	31
6.2.3	Configuration Information Request (CIR) Command .....	31
6.2.4	Configuration-Information-Answer (CIA) Command.....	32
6.2.5	Reporting-Information-Request (RIR) Command .....	32
6.2.6	Reporting-Information-Answer (RIA) Command .....	33
6.2.7	Connection-Management-Request (CMR) Command.....	34
6.2.8	Connection-Management-Answer (CMA) Command.....	34
6.2.9	MO-Data-Request (ODR) Command .....	35
6.2.10	MO-Data-Answer (ODA) Command.....	35
6.2.11	MT-Data-Request (TDR) Command .....	36
6.2.12	MT-Data-Answer (TDA) Command .....	36
6.3	Result-Code AVP and Experimental-Result AVP Values .....	37
6.3.1	General.....	37
6.3.2	Success.....	37
6.3.3	Permanent Failures .....	37
6.3.3.1	DIAMETER_ERROR_UNAUTHORIZED_REQUESTING_ENTITY (5510).....	37
6.3.3.2	DIAMETER_ERROR_UNAUTHORIZED_SERVICE (5511) .....	37
6.3.3.3	DIAMETER_ERROR_CONFIGURATION_EVENT_STORAGE_NOT_SUCCESSFUL (5513).....	37
6.3.3.4	DIAMETER_ERROR_CONFIGURATION_EVENT_NON_EXISTANT (5514).....	38
6.3.3.5	DIAMETER_ERROR_REQUESTED_LOCATION_NOT_SERVED (5650) .....	38
6.3.3.6	DIAMETER_ERROR_USER_UNKNOWN (5001) .....	38
6.3.3.7	DIAMETER_ERROR_OPERATION_NOT_ALLOWED (5101) .....	38
6.3.3.8	DIAMETER_ERROR_INVALID_EPS_BEARER (5651) .....	38
6.3.3.9	DIAMETER_ERROR_NIDD_CONFIGURATION_NOT_AVAILABLE (5652).....	38
6.3.3.10	DIAMETER_ERROR_SCEF_REFERENCE_ID_UNKNOWN (5515).....	38
6.3.3.11	DIAMETER_ERROR_USER_TEMPORARILY_UNREACHABLE (5653) .....	38
6.3.3.12	DIAMETER_ERROR_UNREACHABLE_USER (4221).....	38
6.4	AVPs .....	38
6.4.1	General.....	38
6.4.2	Monitoring-Event-Configuration .....	42
6.4.3	Monitoring-Event-Report .....	42
6.4.4	Communication-Failure-Information.....	43
6.4.5	Cause-Type .....	43
6.4.6	SIAP-Cause.....	44
6.4.7	RANAP-Cause.....	44
6.4.8	BSSGP-Cause .....	44
6.4.9	GMM-Cause .....	44
6.4.10	SM-Cause .....	44
6.4.11	Number-Of-UE-Per-Location-Configuration .....	44
6.4.12	Number-Of-UE-Per-Location-Report.....	44
6.4.13	UE-Count.....	45
6.4.14	Feature-List AVP.....	45
6.4.14.1	Feature-List AVP for the T6a/T6b application .....	45

6.4.15	DRMP .....	45
6.4.16	User-Identifier .....	46
6.4.17	Bearer-Identifier .....	46
6.4.18	Connection-Action .....	46
6.4.19	Non-IP-Data .....	46
6.4.20	Service-Selection .....	46
6.4.21	Serving-PLMN-Rate-Control .....	46
6.4.22	Downlink-Rate-Limit .....	47
6.4.23	Uplink-Rate-Limit .....	47
6.4.24	SCEF-Wait-Time .....	47
6.4.25	CMR-Flags .....	47
6.4.26	Extended-PCO .....	47
6.4.27	RRC-Cause-Counter .....	47
6.4.28	Counter-Value .....	47
6.4.29	RRC-Counter-Timestamp .....	48
6.4.30	Terminal-Information .....	48
6.4.31	TDA-Flags .....	48
6.4.32	Idle-Status-Indication .....	48
6.4.33	Idle-Status-Timestamp .....	49
6.4.34	Active-Time .....	49
6.4.35	Reachability-Cause .....	49
6.4.36	APN-Rate-Control-Status .....	50
6.4.37	Uplink-Number-Of-Packets-Allowed .....	50
6.4.38	Number-Of-Additional-Exception-Reports .....	50
6.4.39	Downlink-Number-Of-Packets-Allowed .....	50
6.4.40	APN-Rate-Control-Status-Validity-Time .....	50
A.1	T6a/b and T7 interfaces .....	51
A.1.1	General .....	51
A.1.2	SCEF behaviour .....	51
A.1.3	MME/SGSN behaviour .....	51
A.1.4	IWK-SCEF behaviour .....	52
<b>Annex B (normative):</b>	<b>Diameter message priority mechanism .....</b>	<b>53</b>
B.1	General .....	53
B.2	T6a, T6ai, T6b, T6bi, T7 interfaces .....	53
<b>Annex C (normative):</b>	<b>Diameter load control mechanism .....</b>	<b>54</b>
C.1	General .....	54
C.2	SCEF behaviour .....	54
C.3	MME/SGSN behaviour .....	54
C.4	IWK-SCEF behaviour .....	54
<b>Annex D (informative):</b>	<b>Change history .....</b>	<b>55</b>
History .....		58

---

# Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

**might not** indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

**is** (or any other verb in the indicative mood) indicates a statement of fact

**is not** (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.



---

# 1 Scope

The present document describes the Diameter-based interfaces between the SCEF/IWK-SCEF and other network entities such as MME/SGSN for the Architecture enhancements to facilitate communications with packet data networks and applications.

In particular, this document specifies the T6a interface between the MME and the SCEF, the T6ai interface between the MME and the IWK-SCEF, the T6b interface between the SGSN and the SCEF, the T6bi interface between the SGSN and the SCEF and the T7 interface between the SCEF and the IWK-SCEF. The procedures over those interfaces are defined in 3GPP TS 23.682 [2].

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.682: "Architecture enhancements to facilitate communications with packet data networks and applications".
- [3] Void.
- [4] 3GPP TS 29.229: "Cx and Dx interfaces based on the Diameter protocol; protocol details".
- [5] 3GPP TS 29.336: "Home Subscriber Server (HSS) diameter interfaces for interworking with packet data networks and applications".
- [6] 3GPP TS 29.228: "IP multimedia (IM) Subsystem Cx Interface; Signalling flows and Message Elements".
- [7] IETF RFC 4960: "Stream Control Transport Protocol".
- [8] IETF RFC 5234: "Augmented BNF for Syntax Specifications: ABNF".
- [9] IETF RFC 7683: "Diameter Overload Indication Conveyance".
- [10] 3GPP TS 29.212: "Policy and Charging Control (PCC); Reference points".
- [11] 3GPP TS 25.413: "UTRAN Iu interface Radio Access Network Application Part (RANAP) signalling".
- [12] 3GPP TS 24.008: "Mobile Radio Interface Layer 3 specification; Core Network Protocols; Stage 3".
- [13] 3GPP TS 36.413: "Evolved Universal Terrestrial Radio Access Network (E-UTRAN); S1 Application Protocol (S1AP)".
- [14] 3GPP TS 48.018: "General Packet Radio Service (GPRS); Base Station System (BSS) - Serving GPRS Support Node (SGSN); BSS GPRS protocol (BSSGP)".
- [15] IETF RFC 7944: "Diameter Routing Message Priority".

- [16] 3GPP TS 29.272: "Mobility Management Entity (MME) and Serving GPRS Support Node (SGSN) related interfaces based on Diameter protocol".
- [17] 3GPP TS 29.329: "Sh Interface based on the Diameter protocol; Protocol details".
- [18] Void.
- [19] 3GPP TS 23.007: "Restoration procedures".
- [20] 3GPP TS 32.299: "Telecommunication management; Charging management; Diameter charging applications".
- [21] IETF RFC 5778: "Diameter Mobile IPv6: Support for Home Agent to Diameter Server Interaction".
- [22] 3GPP TS 32.299: "Telecommunication management; Charging management; Diameter charging applications".
- [23] 3GPP TS 32.253: "Telecommunication management; Charging management; Control Plane (CP) data transfer domain charging".
- [24] 3GPP TS 23.003: "Numbering, addressing and identification".
- [25] 3GPP TS 23.401: "GPRS enhancements for E-UTRAN access".
- [26] 3GPP TS 29.172: "Location Services (LCS); Evolved Packet Core (EPC) LCS Protocol (ELP) between the Gateway Mobile Location Centre (GMLC) and the Mobile Management Entity (MME); SLg interface".
- [27] 3GPP TS 29.338: "Diameter based protocols to support SMS capable MMEs".
- [28] 3GPP TS 24.301: "Non-Access-Stratum (NAS) protocol for Evolved Packet System (EPS); Stage 3".
- [29] 3GPP TS 29.061: "Interworking between the Public Land Mobile Network (PLMN) supporting packet based services and Packet Data Networks (PDN)".
- [30] 3GPP TS 32.298: "Telecommunication Management; Charging Management; Charging Data Record (CDR) parameter description".
- [31] IETF RFC 8583: "Diameter Load Information Conveyance".
- [32] IETF RFC 6733: "Diameter Base Protocol".
- [33] 3GPP TS 29.274: " Evolved General Packet Radio Service (GPRS) Tunnelling Protocol for Control plane (GTPv2-C)".

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply.

### 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

DRMP	Diameter Routing Message Priority
DSCP	Differentiated Services Code Point

SCEF Service Capability Exposure Function  
 IWK-SCEF Interworking - SCEF


## 4 General Description

### 4.1 Introduction

The T6a/b reference point between the MME/SGSN and the SCEF, the T6ai/bi reference point between the MME/SGSN in the VPLMN and the IWK-SCEF and the T7 reference point between the IWK-SCEF and the SCEF are defined in the 3GPP TS 23.682 [2].

This document describes the Diameter-based T6a/b, T6ai/bi and T7 related procedures, message parameters and protocol specification.

An excerpt of the 3GPP Architecture for the enhancements to facilitate communications with packet data networks and applications, as defined in 3GPP TS 23.682 [2] is shown in Figure 4.1-1, where the relevant interfaces towards the SCEF/IWK-SCEF are highlighted.

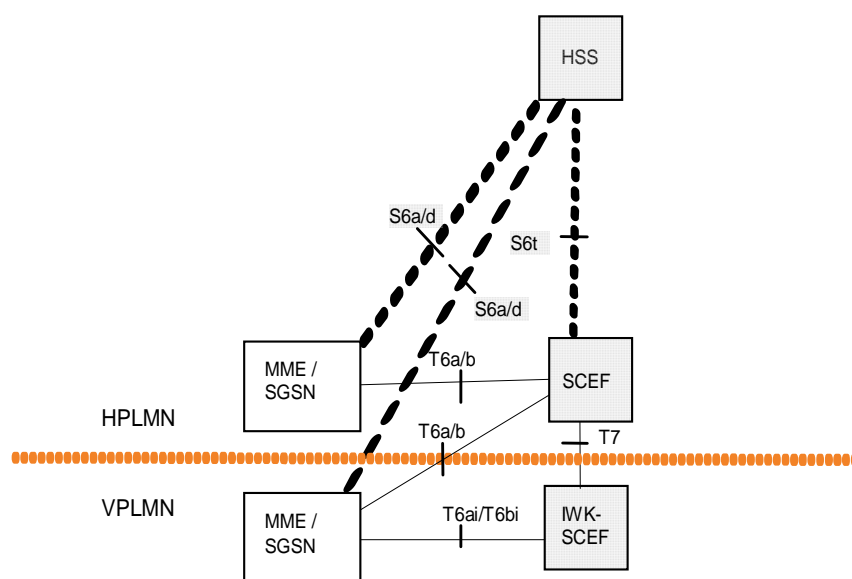

**Figure 4.1-1: 3GPP Architecture for the enhancements to facilitate communications with packet data networks and applications**

In this architecture, the T6a/b reference point connects the MME/SGSN with the SCEF.

The T6a/b interface shall allow the SCEF:

- to receive reports of the monitoring events from the MME/SGSN configured via an HSS;
- to configure the monitoring events at an MME/SGSN which are not UE related in the non roaming cases;
- to manage a connection between the MME and the SCEF on T6a;
- to send MT data on T6a;
- to receive MO data on T6a.

The T6ai/bi reference point connects the MME/SGSN with the IWK-SCEF in the visited network, if the IWK-SCEF is deployed.

The T6ai/bi interface shall allow the IWK-SCEF to:

- to receive configuration of the monitoring events from the MME or the SGSN and perform a filtering of the services which are allowed for this subscriber in this visited network based on roaming policies;
- to receive reports of the monitoring events from the MME/SGSN that are configured via an HSS, perform a filtering and forward them to the SCEF (in the home network which has configured the event) via the T7 reference point;
- to receive MO data on T6ai/bi and forward them to the SCEF;
- to receive MT data and forward them to the MME on T6ai/bi;
- to manage a connection between MME/SGSN and IWK-SCEF on T6ai/bi and forward connection management commands to the SCEF.

The T7 reference point connects the IWK-SCEF in the visited network with the SCEF in the home network.

The T7 interface shall allow the IWK-SCEF to:

- to forward reports received on T6ai/bi to the SCEF indicated in the event report received on T6ai/T6bi;
- to receive MO data on T6ai/bi and forward them to the SCEF on T7;
- to receive MT data on T7 and forward them to the MME/SGSN;
- to manage connection between the SCEF and the IWK-SCEF on T7 and forward connection management commands to the MME/SGSN.

---

## 5 Procedures Description

### 5.1 Introduction

This clause describes the Diameter-based T6a, T6b, T6ai, T6bi and T7 interface related procedures and the Information elements exchanged between the functional entities.

In the tables that describe the Information Elements transported by each Diameter command, each Information Element is marked as (M) Mandatory, (C) Conditional or (O) Optional in the "Cat." column. For the correct handling of the Information Element according to the category type, see the description detailed in clause 6 of the 3GPP TS 29.228 [6].

### 5.2 Report Procedures

#### 5.2.1 General

This procedure is used between the MME/SGSN and the SCEF, between the MME/SGSN and the IWK-SCEF and between the IWK-SCEF and the SCEF.

When the procedure is invoked by the MME or the SGSN, it is used for reporting:

- UE Loss of Connectivity;
- UE Reachability;
- Location of the UE and change in location of the UE;
- Communication Failure;
- Availability after DNN failure;

- Idle Status Indication;
- PDN Connectivity Status.

When the procedure is invoked by the IWK-SCEF, it is used for conveying the monitoring event reported by the MME or the SGSN to the SCEF, after applying the roaming policies configured at the IWK-SCEF.

This procedure is mapped to the commands Reporting-Information-Request/Answer in the Diameter application specified in clause 6. The tables 5.2.1-1 and 5.2.1-2 detail the involved information elements.

**Table 5.2.1-1: Reporting Information Request**

Information Element Name	Mapping to Diameter AVP	Cat.	Description
User Identity (See 6.4.16)	User-Identifier	C	If present, this information element shall contain the identity of the UE. This is a grouped AVP containing the MSISDN or the External-Identifier.
Monitoring Event Report (see 3GPP TS 29.336 [5] clause 8.4.3)	Monitoring-Event-Report	C	If the Reporting-Information-Request is sent for reporting the monitoring events, the MME/SGSN and the IWK-SCEF shall include the monitoring event(s) reported towards the SCEF.
Supported Features (See 3GPP TS 29.229 [4])	Supported-Features	O	If present, this information element shall contain the list of features supported by the origin host.

**Table 5.2.1-2: Reporting Information Answer**

Information Element Name	Mapping to Diameter AVP	Cat.	Description
Result (See 6.3)	Result-Code / Experimental-Result	M	Result of the request. Result-Code AVP shall be used for errors defined in the Diameter Base Protocol. Experimental-Result AVP shall be used for T6a/b errors. This is a grouped AVP, which contains the 3GPP Vendor ID in the Vendor-Id AVP, and the error code in the Experimental-Result-Code AVP.
Supported Features (See 3GPP TS 29.229 [4])	Supported-Features	O	If present, this information element shall contain the list of features supported by the origin host.
Monitoring Event Report Status	Monitoring-Event-Report-Status	O	If present, this information element shall contain the status of each individual monitoring event report received by the SCEF from the MME/SGSN.

## 5.2.2 Detailed Behaviour of the MME/SGSN

### 5.2.2.0 General

The MME/SGSN shall fill the Monitoring-Event-Report AVP according to the event reported as specified below. For all monitoring events, the SCEF-ID, the SCEF-Reference-ID/SCEF-Reference-ID-Ext and the Monitoring-Type AVPs shall be included. In addition, the event specific AVPs as listed below shall be included based on the type of event reported.

The MME/SGSN shall include the External-Identifier or the MSISDN if present in the subscription data received from the HSS.

If the MME/SGSN receives an Experimental-Result-Code set to DIAMETER\_ERROR\_SCEF\_REFERENCE\_ID\_UNKNOWN within an RIA command, it shall delete the event stored for the indicated SCEF-ID and SCEF-Reference-ID/SCEF-Reference-ID-Ext (see 3GPP TS 23.007 [19]).

### 5.2.2.1 UE Loss of Connectivity

The following AVPs shall be present within the Monitoring-Event-Report AVP when the UE Loss of Connectivity event is reported:

- Monitoring-Type set to LOSS\_OF\_CONNECTIVITY (0)

The following AVPs may be present within the Monitoring-Event-Report AVP when the UE Loss of Connectivity event is reported:

- Loss-Of-Connectivity-Reason set to one of the values defined in 3GPP TS 29.336 [5]

### 5.2.2.2 UE Reachability

The following AVPs shall be present within the Monitoring-Event-Report AVP when the UE Reachability event is reported:

- Monitoring-Type set to either UE\_REACHABILITY (1) or UE\_REACHABILITY\_AND\_IDLE\_STATUS\_INDICATION (8), as received in the configuration request.
- Reachability-Information set to REACHABLE\_FOR\_DATA(1)

The following AVPs may be present within the Monitoring-Event-Report AVP when the UE Reachability event is reported:

- Maximum-UE-Availability-Time
- Reachability-Cause

NOTE: When the Monitoring-Type is UE\_REACHABILITY\_AND\_IDLE\_STATUS\_INDICATION (8), absence of the Idle-Status-Indication AVP from the Monitoring-Event-Report AVP indicates that UE reachability is reported.

### 5.2.2.3 Location Reporting

The following AVPs shall be present within the Monitoring-Event-Report AVP when the location event is reported:

- Monitoring-Type set to LOCATION\_REPORTING (2)
- EPS-Location-Information

### 5.2.2.4 Communication Failure

The following AVPs shall be present within the Monitoring-Event-Report AVP when the Communication Failure event is reported

- Monitoring-Type set to COMMUNICATION\_FAILURE (5)
- Communication-Failure-Information (see clause 6.4.3)

### 5.2.2.5 Availability after DDN failure

The following AVPs shall be present within the Monitoring-Event-Report AVP when the Availability after DDN failure event is reported:

- Monitoring-Type set to either AVAILABILITY\_AFTER\_DD\_N\_FAILURE (6) or AVAILABILITY\_AFTER\_DNN\_FAILURE\_AND\_IDLE\_STATUS\_INDICATION (9), as received in the configuration request.

NOTE: When the Monitoring-Type is AVAILABILITY\_AFTER\_DNN\_FAILURE\_AND\_IDLE\_STATUS\_INDICATION (9), absence of the Idle-Status-Indication AVP from the Monitoring-Event-Report AVP indicates that Availability after DNN failure is reported.

### 5.2.2.6 Idle Status Indication

The following AVPs shall be present within the Monitoring-Event-Report AVP when the Idle Status Indication event is reported:

- Monitoring-Type set to UE\_REACHABILITY\_AND\_IDLE\_STATUS\_INDICATION (8) or to AVAILABILITY\_AFTER\_DDN\_FAILURE\_AND\_IDLE\_STATUS\_INDICATION (9), depending on the Monitoring-Type of the corresponding event configuration.
- Idle-Status-Indication

### 5.2.2.7 PDN Connectivity Status

The following AVPs shall be present within the Monitoring-Event-Report AVP when the PDN Connectivity Status event is reported:

- Monitoring-Type set to PDN\_CONNECTIVITY\_STATUS (8)
- PDN-Connectivity-Status-Report

## 5.2.3 Detailed Behaviour of the SCEF

When the SCEF receives a Reporting Information Request from the MME/SGSN or the IWK-SCEF and at least one of the Monitoring Event Report AVPs has a SCEF-Reference-ID/SCEF-Reference-ID-Ext not known by the SCEF, it shall reply with Experimental-Result-Code set to DIAMETER\_ERROR\_SCEF\_REFERENCE\_ID\_UNKNOWN (see 3GPP TS 23.007 [19]). In that case, if the HSS had included multiple Monitoring Event Reports in the RIR command, the SCEF shall include in the Reporting Information Answer command a list of Monitoring-Event-Report-Status AVPs where the status of multiple monitoring event reports is detailed. In that AVP list, the AVPs corresponding to event reports with a successful status may be omitted by the SCEF, for efficiency.

Otherwise when the SCEF receives a Reporting-Information-Request command from the MME/SGSN or the IWK-SCEF, the SCEF shall set Result-Code to DIAMETER\_SUCCESS in the Reporting-Information-Answer and shall handle it according to the procedures defined in 3GPP TS 23.682 [2].

## 5.2.4 Detailed Behaviour of the IWK-SCEF

When the IWK-SCEF receives a Reporting-Information-Request command from the MME/SGSN it shall deliver the request to the SCEF after applying the roaming policies configured at the IWK-SCEF, as specified in 3GPP TS 23.682 [2].

## 5.3 Event Configuration Procedure

### 5.3.1 General

This procedure is used between the SCEF and the MME and between the SCEF and the SGSN to configure the monitoring events directly at the MME/SGSN through the T6a/b interface.

When the procedure is invoked by the SCEF, it is used for configuring the event(s):

- the number of UEs at a given geographic location.

This procedure is mapped to the commands Configuration-Information-Request/Answer in the Diameter application specified in clause 6. The tables 5.3.1-1 and 5.3.1-2 detail the involved information elements.

**Table 5.3.1-1: Configuration Information Request**

Information Element Name	Mapping to Diameter AVP	Cat.	Description
Monitoring Event Configuration (see clause 6.4.2)	Monitoring-Event-Configuration	C	If present, this Information Element shall contain the details of the Monitoring event(s) configured.
Supported Features (See 3GPP TS 29.229 [4])	Supported-Features	O	If present, this Information Element shall contain the list of features supported by the origin host.

**Table 5.3.1-2: Configuration Information Answer**

Information Element Name	Mapping to Diameter AVP	Cat	Description
Result (See 6.3)	Result-Code / Experimental-Result	M	Result of the request. Result-Code AVP shall be used for errors defined in the Diameter Base Protocol. Experimental-Result AVP shall be used for T6a/T6b errors. This is a grouped AVP which contains the 3GPP Vendor ID in the Vendor-Id AVP, and the error code in the Experimental-Result-Code AVP.
Supported Features (See 3GPP TS 29.229 [4])	Supported-Features	O	If present, this information element shall contain the list of features supported by the origin host.
Monitoring Event Report (see 3GPP TS 29.336 [5] clause 8.4.3)	Monitoring-Event-Report	C	If an immediate report is available this information element shall contain the requested data available in the MME/SGSN.
Monitoring Event-Configuration Status (see 3GPP TS 29.336 [5] clause 8.4.24)	Monitoring-Event-Config-Status	O	If present it shall contain the status of each monitoring event configuration identified by an SCEF-Reference-ID/SCEF-Reference-ID-Ext.

### 5.3.2 Detailed Behaviour of the MME/SGSN

Monitoring Events configuration and deletion directly at the MME/SGSN for roaming scenarios is not supported. For the non roaming cases, when the Configuration-Information-Request is received from the SCEF, the MME/SGSN shall, in the following order:

1. Check whether the requesting SCEF is authorized to request the specified service (e.g: number of UEs at a given geographic location). If not, Experimental-Result-Code shall be set to `DIAMETER_ERROR_UNAUTHORIZED_REQUESTING_ENTITY (5510)` in the Configuration-Information-Answer.
2. If the TA / RA / ECGI location requested by the SCEF is not served by the MME/SGSN, then the MME/SGSN shall set the Experimental-Result AVP to `DIAMETER_ERROR_REQUESTED_LOCATION_NOT_SERVED (5650)` in the Configuration-Information-Answer.

If there is an error in any of the above steps then the MME/SGSN shall stop processing and shall return the error code specified in the respective step.

If the MME/SGSN cannot fulfil the received request for reasons not stated above, it shall stop processing the request and set Result-Code to `DIAMETER_UNABLE_TO_COMPLY`.

If CIR message includes multiple SCEF Reference IDs (either in SCEF-Reference-ID or in SCEF-Reference-ID-Ext AVPs) and for a SCEF Reference ID the monitoring events cannot be handled, the MME/SGSN shall report the failed SCEF Reference ID to the SCEF with an appropriate status in the Monitoring-Event-Config-Status AVP.

For the number of UEs in a geographic location monitoring event, for each SCEF-Reference-ID that the MME/SGSN is able to successfully process, the MME/SGSN shall



- if filtering is not requested (i.e. IMSI-Group-Id was not present in the request) or not supported:  
include in the Configuration-Information-Answer, the exact count of the number of UEs that are known to be at the requested location.
- if filtering is requested and (i.e. IMSI-Group-Id was present in the request) and supported:  
include in the Configuration-Information-Answer, the exact count of the number of UEs belonging to the provided IMSI Group that are known to be at the requested location.

If the requested location type is current location, then the MME/SGSN may activate the paging and RAN location reporting procedures (if required) before providing the response in the Configuration-Information-Answer.

If the monitoring event configuration is for a continuous monitoring (i.e. Monitoring-Duration and/or Maximum-Number-Of-Reports are set) and the deletion criteria are met (i.e. Monitoring-Duration time expired and/or Maximum-Number-Of-Reports are sent) the MME/SGSN shall locally delete the Monitoring event.

### 5.3.3 Detailed Behaviour of the IWK-SCEF

Monitoring Events configuration and deletion directly at the MME/SGSN for roaming scenarios is not supported. Consequently the IWK-SCEF is not impacted for Monitoring Events configuration and deletion directly at the MME/SGSN from the SCEF.5.3.4 Detailed Behaviour of the SCEF

When the SCEF receives Monitoring Event Report AVP from the MME/SGSN or the IWK-SCEF in the CIA command, it shall handle it according to the procedures defined in 3GPP TS 23.682 [2].

When the SCEF receives a Monitoring Event Report AVP from the MME/SGSN with a SCEF-Reference-ID/SCEF-Reference-ID-Ext not known by the SCEF, it should discard the Monitoring Event Report received in CIA command.

## 5.4 Event Configuration Procedure for Roaming

### 5.4.1 General

The MME/SGSN shall send the monitoring event configuration information to the IWK-SCEF in roaming scenarios, when the MME/SGSN receives the monitoring event configuration from the HSS. The monitoring event configuration information shall be locally consumed at the IWK-SCEF and the IWK-SCEF shall not route such requests beyond it.

This procedure is mapped to the commands Configuration-Information-Request/Answer in the Diameter application specified in clause 6. The tables 5.4.1-1 and 5.4.1-2 detail the involved information elements.

**Table 5.4.1-1: Configuration-Information-Request**

Information Element Name	Mapping to Diameter AVP	Cat.	Description
Monitoring Event Configuration (see 8.4.2)	Monitoring-Event-Configuration	C	If present, this Information Element shall contain the details of Monitoring event(s).
Monitoring Event Report (see 8.4.3)	Monitoring-Event-Report	C	If an immediate report is available this information element shall contain the event reported by the MME/SGSN. The IWK-SCEF may normalize the event report and return it in the Configuration-Information-Answer.
Supported Features (See 3GPP TS 29.229 [7])	Supported-Features	O	If present, this Information Element shall contain the list of features supported by the origin host.

Table 5.4.1-2: Configuration-Information-Answer

Information Element Name	Mapping to Diameter AVP	Cat	Description
Result (See 6.3)	Result-Code / Experimental- Result	M	Result of the request. Result-Code AVP shall be used for errors defined in the Diameter Base Protocol. Experimental-Result AVP shall be used for T6a/b errors. This is a grouped AVP which contains the 3GPP Vendor ID in the Vendor-Id AVP, and the error code in the Experimental-Result-Code AVP.
Supported Features (See 3GPP TS 29.229 [7])	Supported- Features	O	If present, this information element shall contain the list of features supported by the origin host.
Monitoring Event- Configuration Status (see 3GPP TS 29.336 [5] clause 8.4.24)	Monitoring-Event- Config-Status	O	If present it shall contain the status of each monitoring event configuration identified by an SCEF-Reference-ID/SCEF-Reference-ID-Ext.

## 5.4.2 Detailed Behaviour of the IWK-SCEF

When the Configuration-Information-Request is received from the MME/SGSN, the IWK-SCEF shall, in the following order:

1. Check whether the requesting SCEF, identified by the SCEF-ID is authorized to request the specified service at the VPLMN. If not, Experimental-Result shall be set to DIAMETER\_ERROR\_UNAUTHORIZED\_REQUESTING\_ENTITY (5510) in the Configuration-Information-Answer.
2. Check whether the chargeable party for the monitoring event is authorized to be charged at the VPLMN. If not, Experimental-Result shall be set to DIAMETER\_ERROR\_UNAUTHORIZED\_REQUESTING\_ENTITY (5510) in the Configuration-Information-Answer.

If the monitoring event configuration also carries the monitoring event report, the IWK-SCEF checks if the immediate events reported by the MME/SGSN needs to be normalized. If yes, the IWK-SCEF shall normalize the event report as per local policies. The IWK-SCEF shall then send the normalized monitoring event report towards the SCEF as a separate Reporting-Information-Request message.

If the monitoring event configuration is for a continuous monitoring (i.e. Monitoring-Duration and/or Maximum-Number-Of-Reports are set), then the IWK-SCEF shall temporarily store the monitoring event configuration until the deletion criteria for the monitoring event configuration is met. If the deletion criteria are met, the IWK-SCEF shall delete the Monitoring event locally. The stored monitoring event configuration information shall be used during subsequent monitoring event report procedure, to generate the charging records towards the right chargeable party.

If the received SCEF Reference ID for Deletion (either in SCEF-Reference-ID-for-Deletion or in SCEF-Reference-ID-for-Deletion-Ext AVPs) does not exist, the IWK-SCEF shall set the Experimental-Result-Code to DIAMETER\_ERROR\_CONFIGURATION\_EVENT\_NON\_EXISTANT (5514).

If the SCEF Reference ID (either in SCEF-Reference-ID or in SCEF-Reference-ID-Ext) exists and the old configuration data could not be replaced by new Configuration event data, the HSS shall set the Experimental-Result-Code to DIAMETER\_ERROR\_CONFIGURATION\_EVENT\_STORAGE\_NOT\_SUCCESSFUL (5513).

If the IWK-SCEF cannot fulfil the received request for reasons not stated in the above, it shall stop processing the request and set Result-Code to DIAMETER\_UNABLE\_TO\_COMPLY.

The details how to handle expiring of Monitoring events is described in 3GPP TS 23.682 [2]

## 5.4.3 Detailed Behaviour of the MME/SGSN

When the MME/SGSN receives the Configuration-Information-Answer from the IWK-SCEF, it shall handle it as follows: For the monitoring event configurations for which the configuration status have changed since last informed to

the HSS, the MME/SGSN shall report the status to the HSS through a Notify-Request command as specified in clause 5.2.5 of 3GPP TS 29.272 [16].

## 5.5 MO-Data Procedure

### 5.5.1 General

This procedure shall be used between the MME/SGSN and the SCEF, between the MME/SGSN and the IWK-SCEF and between the IWK-SCEF and the SCEF.

When the procedure is invoked by the MME or SGSN, it is used to forward mobile originated Non-IP data of a mobile user from the MME or SGSN to the SCEF. The procedure is also invoked by the MME on reception of RRC cause "MO Exception data".

This procedure is used according to 3GPP TS 23.682 [2] clause 5.13.4.

The IWK-SCEF may be in the path between the MME/SGSN and the SCEF for roaming cases when the IWK-SCEF is deployed by the operator of the visited PLMN.

When the procedure is invoked by the IWK-SCEF, it is used to forward mobile originated Non-IP data received from the MME or SGSN to the SCEF.

This procedure is mapped to the commands MO-Data-Request/Answer (ODR/ODA) in the Diameter application specified in clause 6.

The tables 5.5.1-1 and 5.5.1-2 detail the involved information elements.

**Table 5.5.1-1: MO Data Request**

Information Element Name	Mapping to Diameter AVP	Cat.	Description
User Identity (See 6.4.16)	User-Identifier	M	This Information Element shall be present and shall contain the identity of the UE. This is a grouped AVP which shall contain the IMSI.
EPS Bearer Identity (See 6.4.17)	Bearer-Identifier	M	This information element shall be present and shall contain either the identity of the EPS bearer identifying the T6a connection, or the NSAPI of the PDP context identifying the T6b connection, for the Non-IP data delivery.
Non IP data (See 6.4.19)	Non-IP-Data	C	This information element shall contain the Non-IP data to be delivered to the SCEF. This Information Element shall be present when the request conveys Non-IP data.
Supported Features (See 3GPP TS 29.229 [4])	Supported-Features	O	If present, this information element shall contain the list of features supported by the origin host.
MO Exception Data Counter (see 6.4.27)	RRC-Cause-Counter	C	The MME shall include this Information Element when MME needs to send a non-zero counter value for the MO Exception Data Counter. The timestamp in the counter shall be set with the time at which the counter value increased from 0 to 1.

Table 5.5.1-2: MO Data Answer

Information Element Name	Mapping to Diameter AVP	Cat.	Description
Result (See 6.3)	Result-Code / Experimental- Result	M	Result of the request. Result-Code AVP shall be used for errors defined in the Diameter Base Protocol. Experimental-Result AVP shall be used for T6a/b errors. This is a grouped AVP, which contains the 3GPP Vendor ID in the Vendor-Id AVP, and the error code in the Experimental-Result-Code AVP.
Supported Features (See 3GPP TS 29.229 [4])	Supported-Features	O	If present, this information element shall contain the list of features supported by the origin host.

## 5.5.2 Detailed Behaviour of the MME/SGSN

The MME shall make use of this procedure over a T6a connection identified by its EPS bearer identity and previously established with the SCEF to forward the Non-IP data received from the UE to the SCEF or to an IWK-SCEF when deployed for a roaming case.

The SGSN shall make use of this procedure over a T6b connection identified by the NSAPI of the PDP context, and previously established with the SCEF, to forward the Non-IP data received from the UE to the SCEF or to an IWK-SCEF when deployed for a roaming case.

The MME shall increment the "MO Exception data counter" by one each time the MME has received the RRC cause "MO Exception data". The MME may defer sending a MO Data command message to report a non-zero value for the MO Exception Data Counter based on local configuration.

If the MME has sent the RRC-Cause-Counter for RRC Cause "MO Exception data" in the MO Data Request command the MME shall reset the RRC-Cause-Counter when receiving MO Data Answer command.

When receiving a Permanent Failure Result-Code/Experimental-Result, the MME or SGSN shall initiate a PDN disconnection procedure or Detach procedure towards the UE and if the permanent failure is different from `DIAMETER_ERROR_INVALID_EPS_BEARER` and different from `DIAMETER_ERROR_USER_UNKNOWN`, the MME or SGSN shall make use of the "Connection Management by MME/SGSN" Procedure (see clause 5.7) to release the T6a/b connection between the MME/SGSN and the SCEF.

## 5.5.3 Detailed Behaviour of the SCEF

When the SCEF receives a MO Data Request from the MME/SGSN or the IWK-SCEF, the SCEF shall, in the following order:

- Check that the User Identity exists in the SCEF. If not, Experimental-Result shall be set to `DIAMETER_ERROR_USER_UNKNOWN` in the MO Data Answer;
- Check if, for this user, a bearer context exists. If not, Experimental-Result shall be set to `DIAMETER_ERROR_INVALID_EPS_BEARER` in the MO Data Answer;
- Process the delivery of the data (if available) to the SCS/AS and/or process the RRC Cause Counter (if available). If the processing of either of them is not successful, return an appropriate Diameter error code, otherwise return a Result code set to `DIAMETER_SUCCESS` to the MME/SGSN or IWK-SCEF. If the data delivery to the SCS/AS has failed due to there being no NIDD configuration context with an SCS/AS, set the Experimental-Result to `DIAMETER_ERROR_NIDD_CONFIGURATION_NOT_AVAILABLE` in the MO Data Answer.

NOTE: The Diameter Result-Code / Experimental-Result returned by the SCEF can depend on the error returned by the SCS/AS to the SCEF. The interface between the SCEF and the SCS/AS is out of scope of 3GPP.

## 5.5.4 Detailed Behaviour of the IWK-SCEF

When the IWK-SCEF receives a MO Data Request from the MME or SGSN, it shall forward the request to the SCEF.

When the IWK-SCEF receives a MO Data Answer from the SCEF, it shall forward the answer to the MME or SGSN.

## 5.6 MT Data Procedure

### 5.6.1 General

This procedure shall be used between the SCEF and the MME or SGSN, between the SCEF and the IWK-SCEF and between the IWK-SCEF and the MME or SGSN.

When the procedure is invoked by the SCEF, it is used to forward mobile terminated Non-IP data of a mobile user from the SCEF to the MME or SGSN.

This procedure is used according to 3GPP TS 23.682 [2] clause 5.13.3.

The IWK-SCEF may be in the path between the SCEF and the MME/SGSN for roaming cases when the IWK-SCEF is deployed by the operator of the visited PLMN.

When the procedure is invoked by the IWK-SCEF, it is used to forward mobile terminated Non-IP data received from the SCEF to the MME or SGSN.

This procedure is mapped to the commands MT-Data-Request/Answer (TDR/TDA) in the Diameter application specified in clause 6.

The tables 5.6.1-1 and 5.6.1-2 detail the involved information elements.

NOTE: The corresponding message name in 3GPP TS 23.682 [2] is "NIDD Submit Request".

**Table 5.6.1-1: MT Data Request**

Information Element Name	Mapping to Diameter AVP	Cat.	Description
User Identity (See 6.4.16)	User-Identifier	M	This Information Element shall be present and shall contain the identity of the UE. This is a grouped AVP which shall contain the IMSI.
EPS Bearer Identity (See 6.4.17)	Bearer-Identifier	M	This information element shall be present and shall contain either the identity of the EPS bearer identifying the T6a connection, or the NSAPI of the PDP context identifying the T6b connection, for the Non-IP data delivery.
Non-IP Data (See 6.4.19)	Non-IP-Data	C	This information element shall contain the Non-IP data to be delivered to the MME or SGSN. This Information Element shall be present when the request conveys Non-IP data.
SCEF Wait Time (See 6.4.24)	SCEF-Wait-Time	O	This information element, when present, shall indicate the timestamp (in UTC) until which the SCEF expects a response.
Maximum Retransmission Time (See 3GPP TS 29.338 [27])	Maximum-Retransmission-Time	O	This information element, when present, shall indicate the maximum retransmission time (in UTC) until which the SCEF is capable to retransmit the MT Non-IP Data.
Supported Features (See 3GPP TS 29.229 [4])	Supported-Features	O	If present, this information element shall contain the list of features supported by the origin host.

Table 5.6.1-2: MT Data Answer

Information Element Name	Mapping to Diameter AVP	Cat.	Description
Result (See 6.3)	Result-Code / Experimental- Result	M	This information element shall contain the Result of the request. The Result-Code AVP shall be used to indicate success or errors as defined in the Diameter Base Protocol. The Experimental-Result AVP shall be used for T6a/b errors. This is a grouped AVP, which contains the 3GPP Vendor ID in the Vendor-Id AVP, and the error code in the Experimental-Result-Code AVP.
Requested Retransmission Time (See 3GPP TS 29.338 [27])	Requested-Retransmission-Time	O	This information element may be present if the Experimental-Result-Code is set to DIAMETER_ERROR_USER_TEMPORARILY_UNREACHABLE and the Maximum Retransmission Time information element is present in the MT Data Request. It may be included if the UE is using a power saving mechanism (such as extended idle mode DRX) and the UE is currently not reachable.  When present, this shall indicate the retransmission time (in UTC) at which the SCEF is requested to retransmit the MT Non-IP Data. The Requested Retransmission Time shall not exceed the Maximum Retransmission Time received from the SCEF.
Supported Features (See 3GPP TS 29.229 [4])	Supported-Features	O	If present, this information element shall contain the list of features supported by the origin host.
TDA Flags (See 6.4.31)	TDA-Flags	O	This Information Element contains a bit mask. See clause 6.4.31 for the meaning of the bits and the condition for each bit to be set or not.

## 5.6.2 Detailed Behaviour of the SCEF

The SCEF shall make use of this procedure over a T6a connection identified by its EPS Bearer Identity, and previously established with the MME, to forward the Non-IP data received from the SCS/AS to the MME or to an IWK-SCEF when deployed for a roaming case.

The SCEF shall make use of this procedure over a T6b connection identified by the NSAPI of the PDP context, and previously established with the SGSN, to forward the Non-IP data received from the SCS/AS to the SGSN or to an IWK-SCEF when deployed for a roaming case.

The SCEF shall check if a bearer context exists for the user before sending the request.

The SCEF may include the Maximum-Retransmission-Time AVP in the MT Data Request to indicate the maximum retransmission time for when it is capable to retransmit the Non-IP Data.

If the MT Data Answer includes the Requested-Retransmission-Time AVP, the SCEF shall retransmit the MT Non-IP Data at the requested retransmission time.

## 5.6.3 Detailed Behaviour of the MME/SGSN

When the MME or SGSN receives a MT Data Request from the SCEF or the IWK-SCEF, the MME or SGSN shall, in the following order:

- Check that the User Identity exists in the MME or SGSN. If not, Experimental-Result shall be set to DIAMETER\_ERROR\_USER\_UNKNOWN in the MT Data Answer;
- Check whether, for this user, a bearer context exists. If not, Experimental-Result shall be set to DIAMETER\_ERROR\_INVALID\_EPS\_BEARER in the MT Data Answer.
- Process the data delivery to the UE and:

- if it is successful, return a Result code set to DIAMETER\_SUCCESS to the SCEF or IWK-SCEF; in addition, if the successful delivery was acknowledged by the eNodeB, the MME/SGSN shall set the "Success Acknowledged Delivery" bit within the TDA-Flags AVP.
- return an Experimental-Result set to DIAMETER\_ERROR\_USER\_TEMPORARILY\_UNREACHABLE, if the UE is using a power saving function (e.g. extended idle mode DRX or UE Power Saving Mode as defined in 3GPP TS 23.682 [27]) and the UE is expected to not be reachable shortly or, based on MME or SGSN implementation, within the time indicated by the SCEF-Wait-Time;

The MME or SGSN shall set the Not Reachable for NIDD flag and store the SCEF Host and Realm for which this flag is set;

If the MT Data Request includes the Maximum-Retransmission-Time AVP, the MME or SGSN may additionally include the Requested-Retransmission-Time AVP requesting the SCEF to retransmit the Non-IP Data at a later time prior to the Maximum Retransmission Time;

The MME or SGSN shall then update the SCEF, as specified in clause 5.7, when it detects that the UE is reachable or about to become reachable and the Not Reachable for NIDD flag is set. If the MME or SGSN included the Requested-Retransmission-Time AVP in the MT Data Answer, the MME or SGSN shall do so only if the UE becomes reachable before the Requested Retransmission Time, i.e. the MME or SGSN shall reset the Not Reachable for NIDD flag when the Requested-Retransmission-Time expires if the UE has not become reachable beforehand;

- return an Experimental-Result set to DIAMETER\_ERROR\_UNREACHABLE\_USER, if the UE is not reachable;
- otherwise return an appropriate Diameter error code.

#### 5.6.4 Detailed Behaviour of the IWK-SCEF

When the IWK-SCEF receives a MT Data Request from the SCEF, it shall forward the request to the MME or SGSN.

When the IWK-SCEF receives a MT Data Answer from the MME or SGSN, it shall forward the answer to the SCEF.

### 5.7 Connection Management by MME/SGSN Procedure.

#### 5.7.1 General

This procedure shall be used between the MME/SGSN and the SCEF, between the MME/SGSN and the IWK-SCEF and between the IWK-SCEF and the SCEF.

When the procedure is invoked by the MME or SGSN, it is used:

- to establish a T6a/b connection between the MME/SGSN and the SCEF;
- to update the parameters (e.g. RAT-Type) for a T6a/b connection between the MME/SGSN and the SCEF;
- to update the status of a T6a/b connection between the MME/SGSN and the SCEF, e.g. to indicate to the SCEF that the UE has become or is about to become reachable when MT non-IP data is pending at the SCEF for a UE using a power saving function;

This procedure is used according to 3GPP TS 23.682 [2] clause 5.13.1 and 5.13.5 and 5.13.6. The IWK-SCEF may be in the path between the MME/SGSN and the SCEF for roaming cases when the IWK-SCEF is deployed by the operator of the visited PLMN.

When the procedure is invoked by the IWK-SCEF, it is used to forward the Connection Management Request received from the MME or SGSN to the SCEF.

This procedure is mapped to the commands Connection-Management-Request/Answer (CMR/CMA) in the Diameter application specified in clause 6.

The tables 5.7.1-1 and 5.7.1-2 detail the involved information elements.

**Table 5.7.1-1: Connection Management Request**

Information Element Name	Mapping to Diameter AVP	Cat.	Description
User Identity (See 6.4.16)	User-Identifier	M	This Information Element shall be present and shall contain the identity of the UE. This is a grouped AVP which shall contain the IMSI.
EPS Bearer Identity (See 6.4.17)	Bearer-Identifier	M	This Information Element shall be present and shall contain either the identity of the EPS bearer identifying the T6a connection, or the NSAPI of the PDP context of the T6b connection, to which the request applies.
T6a/b Connection Action (See 6.4.18)	Connection-Action	M	This Information element shall be present and shall contain a T6a/b connection management action indicating a T6a/b connection establishment or a T6a/b connection release or a T6a/b connection update.
APN (See 6.4.20)	Service-Selection	C	This Information element shall contain the APN the user wants to connect to. It shall be present if the request is for a T6a/b connection establishment.
Serving PLMN Rate Control (See 6.4.21)	Serving-PLMN-Rate-Control	O	If present, this information element shall contain the Serving PLMN rate control set by the MME.
CMR Flags (See 6.4.25)	CMR-Flags	O	This Information Element contains a bit mask. See clause 6.4.25 for the meaning of the bits and the condition for each bit to be set or not.
Maximum UE Availability Time (See 3GPP TS 29.338 [27])	Maximum-UE-Availability-Time	O	This information element may be included, if available, if the Connection-Action AVP indicates a T6a/b connection update and the UE-Reachable-Indicator is set in the CMR-Flags AVP.  When present, it shall indicate the timestamp (in UTC) until which a UE using a power saving mechanism (such as extended idle mode DRX) is expected to be reachable for MT Non-IP Data Delivery. This information may be used by the SCEF to prioritize the retransmission of MT Non-IP Data to UEs using a power saving mechanism.
Extended PCO	Extended-PCO	C	This Information Element shall be present, if the MME or SGSN receives Extended PCO information from the UE.
3GPP Charging Characteristics (See 3GPP TS 32.298 [30])	3GPP-Charging-Characteristics	C	This Information element shall contain the PDN Connection Charging Characteristics data for an APN Configuration with SCEF-based NIDD mechanism. It shall be present if the request is for a T6a/b connection establishment and may be present if the request is for a T6a/b connection update.
RAT-Type (See 3GPP TS 29.212 [10])	RAT-Type	C	This Information Element shall contain the used RAT Type. It shall be present if the request is for a T6a/b connection establishment or for a T6a/b connection update.
Supported Features (See 3GPP TS 29.229 [4])	Supported-Features	O	If present, this information element shall contain the list of features supported by the origin host.
Terminal Information (See 3GPP TS 29.272 [16])	Terminal-Information	C	This Information Element shall contain the identity of the UE. It shall be present if available.
Visited PLMN ID (See 3GPP TS 29.272 [16])	Visited-PLMN-Id	C	This Information Element shall contain the identity (MCC and MNC) of serving PLMN. It shall be present if the request is for a T6a/b connection establishment or for a T6a/b connection update.
APN Rate Control Status (see 6.4.36)	APN-Rate-Control-Status	O	May be present if the request is for a T6a/b connection establishment.



Table 5.7.1-2: Connection Management Answer

Information Element Name	Mapping to Diameter AVP	Cat.	Description
Result (See 6.3)	Result-Code / Experimental- Result	M	Result of the request. Result-Code AVP shall be used for errors defined in the Diameter Base Protocol. Experimental-Result AVP shall be used for T6a/b errors. This is a grouped AVP, which contains the 3GPP Vendor ID in the Vendor-Id AVP, and the error code in the Experimental-Result-Code AVP.
NIDD Charging Identifier (See 3GPP TS 32.299 [22])	PDN-Connection- Charging-Id	C	This Information element is defined in 3GPP TS 32.253 [23] and shall be present if the answer is for a T6a/b connection establishment.
Extended PCO	Extended-PCO	C	This Information Element shall be present, if the SCEF needs to send Extended PCO information to the UE.
Supported Features (See 3GPP TS 29.229 [4])	Supported- Features	O	If present, this information element shall contain the list of features supported by the origin host.
APN Rate Control Status (see 6.4.36)	APN-Rate-Control- Status	O	May be present if the response is for a T6a/b connection release.

## 5.7.2 Detailed Behaviour of the MME/SGSN

The MME or SGSN shall make use of this procedure to request one of the following T6a/b connection management actions:

- for a T6a/b connection establishment, the MME shall:
  - include the user's IMSI.
  - fill the EPS Bearer Identity information element with either the identity of the EPS bearer that MME allocated to the Non-IP PDN connection, or the NSAPI of the PDP context used by the SGSN for the Non-IP connection, as described in 3GPP TS 23.682 [2];
  - if Serving PLMN Rate Control is configured, the MME shall include the Serving PLMN Rate Control information as described in 3GPP TS 23.401 [25];
- for a T6a/b connection release, the MME or SGSN shall:
  - fill the EPS Bearer Identity information element with the identity of the EPS bearer of the T6a connection, or the NSAPI of the PDP context of the T6b connection, which is released as described in 3GPP TS 23.682 [2];
  - upon getting the Connection Management Answer from the SCEF, delete the T6a/b connection context;
- for a T6a/b connection update, the MME or SGSN shall:
  - fill the EPS Bearer Identity information element with the identity of the EPS bearer of the T6a connection, or the NSAPI of the PDP context of the T6b connection, that needs to be updated;
  - set the UE-Reachable-Indicator in the CMR-Flags AVP if the UE has become or is about to become reachable. The MME or SGSN may additionally include the Maximum UE Availability Time AVP, if available, to indicate the timestamp (in UTC) until which a UE using a power saving mechanism (such as extended idle mode DRX) is expected to be reachable for MT Non-IP Data Delivery;
  - upon getting the Connection Management Answer from the SCEF, reset the Not Reachable for NIDD flag if this flag was set and if the UE-Reachable-Indicator was set in the CMR-Flags AVP in the Connection Management Request;
  - if Serving PLMN Rate Control needs to be added or updated, the MME shall include Serving PLMN Rate Control information as described in 3GPP TS 23.401 [25].

NOTE: If the UE has several T6a/b connections to the same SCEF, for which Non-IP data is pending, the MME or SGSN initiates a T6a/b connection update for only one of the T6a/b connections towards this SCEF; the UE can have either T6a or T6b connections, but not both simultaneously.

If the MME or SGSN receives the Extended-PCO AVP in the Connection Management Answer from the SCEF, the MME or SGSN shall forward the Extended-PCO to the UE transparently, as specified in 3GPP TS 24.301 [28].

### 5.7.3 Detailed Behaviour of the SCEF

When the SCEF receives a Connection Management Request from the MME or SGSN the SCEF shall, in the following order:

- check that the User Identity exists in the SCEF. If not, Experimental-Result shall be set to `DIAMETER_ERROR_USER_UNKNOWN` in the Connection Management Answer;
- check that the T6a/b connection action indicates a T6a/b connection establishment, a T6a/b connection release or a T6a/b connection update. If not, the Experimental-Result shall be set to `DIAMETER_ERROR_OPERATION_NOT_ALLOWED` in the Connection Management Answer;
- if the T6a/b connection action indicates a T6a/b connection establishment:
  - check whether a valid NIDD configuration exists for the UE at the SCEF;
  - If not, the SCEF shall:
    - reject the Connection Management Request, with Experimental-Result set to `DIAMETER_ERROR_NIDD_CONFIGURATION_NOT_AVAILABLE` in the Connection Management Answer, or
    - accept the Connection Management Request, and initiate a NIDD Configuration procedure with a default SCS/AS configured in the SCEF and the MSISDN or an external ID obtained from the HSS, as specified in 3GPP TS 29.336 [5] clause 7.2.3.2. If such NIDD Configuration procedure fails, the SCEF shall reject the Connection Management Request, with Experimental-Result set to `DIAMETER_ERROR_NIDD_CONFIGURATION_NOT_AVAILABLE` in the Connection Management Answer;
  - create an EPS bearer context;
  - store the MME or SGSN Identity identified by the Origin-Host AVP of the T6a/b Connection Management Request, and the MME or SGSN realm identified by the Origin-Realm AVP of the T6a/b Connection Management Request in the EPS bearer context;
  - include the Extended-PCO AVP in the Connection Management Answer, if the Extended PCO information (e.g. APN Rate Control information) needs to be provided to the UE;
  - if Serving PLMN Rate Control is provided by the MME, restrict the number of messages for the downlink to not exceed the values provided in Serving PLMN Rate Control. If it is not provided and Serving PLMN Rate Control is active, then continue using the previously provided values;
  - If successful, Result shall be set to `DIAMETER_SUCCESS` in the Connection Management Answer;
- if the T6a/b connection action indicates a T6a/b connection release:
  - check whether, for this user and the received EPS bearer ID, a T6a connection context exists. If not, Experimental-Result shall be set to `DIAMETER_ERROR_INVALID_EPS_BEARER` in the Connection Management Answer;
  - include the Extended-PCO AVP in the Connection Management Answer, if the Extended PCO information needs to be provided to the UE;
  - delete the T6a/b connection context at the SCEF. If successful, Result code shall be set to `DIAMETER_SUCCESS` in the Connection Management Answer;
- if the T6a/b connection action indicates a T6a connection update:

- check whether, for this user and the received EPS Bearer Identity, a T6a/b connection context exists. If not, Experimental-Result shall be set to DIAMETER\_ERROR\_INVALID\_EPS\_BEARER in the Connection Management Answer;
- if successful:
  - if Serving PLMN Rate Control is provided by the MME, restrict the number of messages for the downlink to not exceed the values provided in Serving PLMN Rate Control. If it is not provided and Serving PLMN Rate Control is active, then continue using the previously provided values;
  - include the Extended-PCO AVP in the Connection Management Answer, if the Extended PCO information (e.g. APN Rate Control information) needs to be provided to the UE;
  - store the MME or SGSN Identity identified by the Origin-Host AVP of the T6a/b Connection Management Request and the MME or SGSN realm identified by the Origin-Realm AVP of the T6a/b Connection Management Request, if the MME or SGSN identity has changed, in the bearer context, and the Result shall be set to DIAMETER\_SUCCESS in the Connection Management Answer;
  - if the UE-Reachable-Indicator was set in the CMR-Flags AVP, forward any MT Non-IP data pending for any T6a/b connection for this UE, to the MME or SGSN.

If the Serving-PLMN-Rate-Control AVP is included in the Connection Management Request message from the MME, the SCEF shall enforce the Serving PLMN Rate Control as specified in 3GPP TS 23.401 [12] clause 4.7.7.2.

#### 5.7.4 Detailed Behaviour of the IWK-SCEF

When the IWK-SCEF receives a Connection Management Request from the MME or SGSN, it shall forward the request to the SCEF.

When the IWK-SCEF receives a Connection Management Answer from the SCEF, it shall forward the answer to the MME or SGSN.

## 5.8 Connection Management by SCEF Procedure

### 5.8.1 General

This procedure shall be used between the SCEF and the MME/SGSN, and between the SCEF and the MME/SGSN via the IWK-SCEF acting as a Diameter proxy agent for roaming cases.

When the procedure is invoked by the SCEF, it is used

- to update the parameters (e.g. Extended PCO information) associated to a T6a/b connection between the MME/SGSN and the SCEF;
- to release a T6a/b connection between MME/SGSN and SCEF.

This procedure is used according to 3GPP TS 23.682 [2]. The IWK-SCEF may be in the path between the MME/SGSN and the SCEF for roaming cases when the IWK-SCEF is deployed by the operator of the visited PLMN.

This procedure is mapped to the commands Connection-Management-Request/Answer (CMR/CMA) in the Diameter application specified in clause 6.

The tables 5.8.1-1 and 5.8.1-2 detail the involved information elements.

Table 5.8.1-1: Connection Management SCEF Request

Information Element Name	Mapping to Diameter AVP	Cat.	Description
User Identity (See 6.4.16)	User-Identifier	M	This Information Element shall be present and shall contain the identity of the UE. This is a grouped AVP containing the IMSI.
EPS Bearer Identity (See 6.4.17)	Bearer-Identifier	M	This Information Element shall be present and shall contain either the identity of the EPS bearer identifying the T6a connection, or the NSAPI of the PDP context identifying the T6b connection, to which the request applies.
T6a/b Connection Action (See 6.4.18)	Connection-Action	M	This Information element shall be present and shall contain a T6a/b connection management action indicating a T6a/b connection update.
Extended PCO (see 6.4.26)	Extended-PCO	C	This Information Element shall be present if the SCEF needs to send updated Extended PCO information (e.g. APN Rate Control information) to the UE.
Supported Features (See 3GPP TS 29.229 [4])	Supported-Features	O	If present, this information element shall contain the list of features supported by the origin host.

Table 5.8.1-2: Connection Management SCEF Answer

Information Element Name	Mapping to Diameter AVP	Cat.	Description
Result (See 6.3)	Result-Code / Experimental-Result	M	Result of the request. Result-Code AVP shall be used for errors defined in the Diameter Base Protocol. Experimental-Result AVP shall be used for T6a/b errors. This is a grouped AVP, which contains the 3GPP Vendor ID in the Vendor-Id AVP, and the error code in the Experimental-Result-Code AVP.
Supported Features (See 3GPP TS 29.229 [4])	Supported-Features	O	If present, this information element shall contain the list of features supported by the origin host.

## 5.8.2 Detailed Behaviour of the SCEF

The SCEF shall make use of this procedure to send the updated Extended PCO information (e.g. APN Rate Control information) to the UE during T6a/b connection update, if needed. If APN Rate Control information is included in the Extended-PCO AVP within the Connection Management SCEF Request message from the SCEF, the SCEF shall enforce the APN Rate Control as specified in 3GPP TS 23.401 [12] clause 4.7.7.3.

The SCEF shall make use of this procedure to request the release of the T6a/b connection.

## 5.8.3 Detailed Behaviour of the MME/SGSN

When the MME or SGSN receives a Connection Management SCEF Request from the SCEF or the IWK-SCEF, the MME or SGSN shall, in the following order:

- check that the User Identity exists in the MME or SGSN. If not, Experimental-Result shall be set to DIAMETER\_ERROR\_USER\_UNKNOWN in the Connection Management SCEF Answer;
- check that the T6a/b connection action indicates a T6a/b connection update or T6a/b connection release. If not, the Experimental-Result shall be set to DIAMETER\_ERROR\_OPERATION\_NOT\_ALLOWED in the Connection Management SCEF Answer;

- check whether, for this user and the received EPS Bearer Identity, a T6a/b connection context exists. If not, Experimental-Result shall be set to DIAMETER\_ERROR\_INVALID\_EPS\_BEARER in the Connection Management SCEF Answer;
- if the T6a/b connection action indicates a T6a/b connection update:
  - if the Extended-PCO AVP is received, forward the Extended-PCO to the UE, as specified in 3GPP TS 24.301[28]. If successful, the Result code shall be set to DIAMETER\_SUCCESS in the Connection Management SCEF Answer.
- if the T6a/b connection action indicates T6a/b connection release, delete the T6a/b connection context at the MME/SGSN. If successful, the Result code shall be set to DIAMETER\_SUCCESS in the Connection Management SCEF Answer.

#### 5.8.4 Detailed Behaviour of the IWK-SCEF

When the IWK-SCEF receives a Connection Management SCEF Request from the SCEF, it shall forward the request to the MME or SGSN.

When the IWK-SCEF receives a Connection Management SCEF Answer from the MME or SGSN, it shall forward the answer to the SCEF.

---

## 6 Protocol Specification and Implementation

### 6.1 Introduction

#### 6.1.1 Use of Diameter Base Protocol

The Diameter base protocol as specified in IETF RFC 6733 [32] shall apply except as modified by the defined support of the methods and the defined support of the commands and AVPs, result and error codes as specified in this specification. Unless otherwise specified, the procedures (including error handling and unrecognised information handling) shall be used unmodified.

#### 6.1.2 Securing Diameter Messages

For secure transport of Diameter messages, see 3GPP TS 33.210 [4].

#### 6.1.3 Accounting Functionality

Accounting functionality (Accounting Session State Machine, related command codes and AVPs) shall not be used on the T6a/T6b interface, T6ai/T6bi interface and the T7 interface.

#### 6.1.4 Use of Sessions

Diameter sessions shall be implicitly terminated between:

- the MME/SGSN and the SCEF, for the T6a/T6b interface;
- the MME/SGSN and the IWK-SCEF, for the T6ai/T6bi interface and
- the IWK-SCEF and the SCEF for the T7 interface.

An implicitly terminated session is one for which the server does not maintain state information. The client shall not send any re-authorization or session termination requests to the server.

The Diameter base protocol includes the Auth-Session-State AVP as the mechanism for the implementation of implicitly terminated sessions.

The client (server) shall include in its requests (responses) the Auth-Session-State AVP set to the value NO\_STATE\_MAINTAINED (1), as described in IETF RFC 6733 [32]. As a consequence, the server shall not maintain any state information about this session and the client shall not send any session termination request. Neither the Authorization-Lifetime AVP nor the Session-Timeout AVP shall be present in requests or responses.

## 6.1.5 Transport Protocol

Diameter messages over the T6a/T6b, T6ai/T6bi and T7 interface shall make use of SCTP IETF RFC 4960 [7] as transport protocol.

## 6.1.6 Routing Considerations

### 6.1.6.1 Routing Considerations for Monitoring Event related Requests

This clause specifies the use of the Diameter routing AVPs Destination-Realm and Destination-Host for Monitoring Event related requests.

The MME/SGSN shall use the SCEF-ID and the SCEF realm previously received over S6a/b for a monitoring event configuration as the Destination-Host AVP and the Destination-Realm AVP in the Reporting-Information-Request for the monitoring event reports sent over the T6a/T6b or T6ai/bi interface.

The MME/SGSN shall use the pre-configured IWK-SCEF identify and the pre-configured IWK-SCEF realm as the Destination-Host AVP and the Destination Realm AVP in the Configuration-Information-Request for the monitoring event configuration sent over the T6ai/bi interface.

The IWK-SCEF behaves as a Diameter Proxy agent according to IETF RFC 6733 [32] for the Reporting-Information-Request received from the MME/SGSN over the T6ai/bi interface and shall forward these requests to the SCEF over the T7 interface by keeping unchanged the Destination Realm and Destination Host AVPs.

For monitoring events directly configured at the MME/SGSN by the SCEF, if the SCEF knows the address/name of the MME/SGSN, both the Destination-Realm AVP and the Destination-Host AVP shall be present in the request. Otherwise, only the Destination-Realm AVP shall be present and the command shall be routed to the next Diameter node. Consequently, the Destination-Host AVP is declared as optional in the ABNF for all Monitoring Event related requests initiated by the SCEF.

The Destination-Realm AVP is declared as mandatory in the ABNF for all Monitoring Event related requests. The Destination-Host AVP is declared as optional in the ABNF description of the Reporting-Information-Request and of the Configuration Information-Request.

### 6.1.6.2 Routing Considerations for Non-IP Data Related Requests

This clause specifies the use of the Diameter routing AVPs Destination-Realm and Destination-Host for Non-IP Data related requests.

The MME or SGSN shall use the SCEF-ID and the SCEF realm that it received in the subscribed APN associated to the T6a/b connection at its establishment as the Destination-Host AVP and the Destination realm AVP in the Non-IP data related request commands sent over the T6a/b and T6ai/bi interfaces.

The Destination-Host AVP is declared as optional and the Destination realm AVP as mandatory in the ABNF description of the Non-IP data related requests initiated by the MME or SGSN.

NOTE 1: For roaming cases, the routing of MME or SGSN initiated request commands to the IWK-SCEF relies on the Destination Realm AVP as according to the Diameter base protocol.

NOTE 2: The Diameter implicitly terminated sessions and their Session ID for the Non-IP data related traffic are end to end between the MME/SGSN and the SCEF.

The IWK-SCEF behaves as a Diameter Proxy agent according to IETF RFC 6733 [32] for the Non-IP related requests received from the MME or SGSN over the T6ai/bi interfaces and shall forward these requests to the SCEF over the T7 interface by keeping unchanged the Destination Realm and Destination Host AVPs.

The SCEF obtains the Destination-Host AVP and the Destination-Realm AVP to use in the Non-IP data related requests towards an MME or SGSN from the Origin-Host AVP and the Origin-Realm AVP received in previous Non-IP Data related requests from the MME or SGSN. The Origin-Realm AVP in the requests received by the SCEF in roaming cases should contain the domain name of the network to which the MME or SGSN belongs, encoded as specified in clause 19.2 of 3GPP TS 23.003 [24].

The Destination-Host AVP is declared as optional and the Destination realm AVP as mandatory in the ABNF for the Non-IP Data related requests initiated by the SCEF.

The IWK-SCEF behaves as a Diameter Proxy agent according to IETF RFC 3588 [3] for the Non-IP related requests received from the SCEF over the T7 interface and shall forward these requests to the MME or SGSN over the T6ai/bi interfaces by keeping unchanged the Destination Realm and Destination Host AVPs.

### 6.1.6.3 Handling of the Vendor-Specific-Application-Id AVP

If the Vendor-Specific-Application-ID AVP is received in any of the commands defined in this specification, it shall be ignored by the receiving node, and it shall not be used for routing purposes.

## 6.1.7 Advertising Application Support

The SCEF, MME, SGSN and the IWK-SCEF shall advertise support of the Diameter T6a/T6b Application by including the value of the application identifier in the Auth-Application-Id AVP within the Vendor-Specific-Application-Id grouped AVP of the Capabilities-Exchange-Request and Capabilities-Exchange-Answer commands.

NOTE: Even though the reference point between the MME/SGSN and the IWK-SCEF is called T6ai/T6bi respectively and the reference point between the IWK-SCEF and the SCEF is called T7, all these reference points use the same Diameter Application ID.

The vendor identifier value of 3GPP (10415) shall be included in the Supported-Vendor-Id AVP of the Capabilities-Exchange-Request and Capabilities-Exchange-Answer commands, and in the Vendor-Id AVP within the Vendor-Specific-Application-Id grouped AVP of the Capabilities-Exchange-Request and Capabilities-Exchange-Answer commands.

The Vendor-Id AVP included in Capabilities-Exchange-Request and Capabilities-Exchange-Answer commands that is not included in the Vendor-Specific-Application-Id AVPs as described above shall indicate the manufacturer of the Diameter node as per IETF RFC 6733 [32].

## 6.1.8 Diameter Application Identifier

The T6a/T6b interface protocol shall be defined as an IETF vendor specific Diameter application, where the vendor is 3GPP. The vendor identifier assigned by IANA to 3GPP (<http://www.iana.org/assignments/enterprise-numbers>) is 10415.

The Diameter application identifier assigned to the T6a/T6b interface application is 16777346.

The T6ai/T6bi and the T7 interface protocol shall use the same Diameter application identifier as the T6a/T6b interface.

## 6.1.9 Use of the Supported-Features AVP

When new functionality is introduced on the T6a/T6b application, it should be defined as optional. If backwards incompatible changes cannot be avoided, the new functionality shall be introduced as a new feature and support advertised with the Supported-Features AVP. The usage of the Supported-Features AVP on the T6a/T6b application is consistent with the procedures for the dynamic discovery of supported features as defined in clause 7.2 of 3GPP TS 29.229 [4].

When extending the application by adding new AVPs for a feature, the new AVPs shall have the M bit cleared and the AVP shall not be defined mandatory in the command ABNF.

As defined in 3GPP TS 29.229 [4], the Supported-Features AVP is of type grouped and contains the Vendor-Id, Feature-List-ID and Feature-List AVPs. On the all reference points as specified in this specification, the Supported-Features AVP is used to identify features that have been defined by 3GPP and hence, for features defined in this

document, the Vendor-Id AVP shall contain the vendor ID of 3GPP (10415). If there are multiple feature lists defined for the reference point, the Feature-List-ID AVP shall differentiate those lists from one another.

## 6.2 Commands

### 6.2.1 Introduction

This clause defines the Command code values and related ABNF for each command described in this specification. The ABNF for the commands on T6a/T6b, T6ai/T6bi and T7 are the same if not specified explicitly different.

### 6.2.2 Command-Code values

This clause defines Command-Code values for the T6a/T6b interface application as allocated by IANA.

Every command is defined by means of the ABNF syntax IETF RFC 5234 [8], according to the Command Code Format (CCF) specification defined in IETF RFC 6733 [32]. When the definition and use of an AVP is not specified in this document, the guidelines in IETF RFC 6733 [32] shall apply.

The Vendor-Specific-Application-Id AVP shall not be included in any command sent by Diameter nodes supporting applications defined in this specification. If the Vendor-Specific-Application-Id AVP is received in any of the commands defined in this specification, it shall be ignored by the receiving node.

**NOTE:** The Vendor-Specific-Application-Id is included as an optional AVP in all Command Code Format specifications defined in this specification in order to overcome potential interoperability issues with intermediate Diameter agents non-compliant with IETF RFC 6733 [32].

The following Command Codes are defined in this specification for T6a/T6b:

**Table 6.2.2-1: Command-Code values for T6a/T6b**

Command-Name	Abbreviation	Code	Clause
Configuration-Information-Request	CIR	8388718	3GPP TS 29.336 [5] clause 8.2.3 and clause 6.2.3 below
Configuration-Information-Answer	CIA	8388718	3GPP TS 29.336 [5] clause 8.2.4 and clause 6.2.4 below
Reporting-Information-Request	RIR	8388719	3GPP TS 29.336 [5] clause 8.2.5 and clause 6.2.5 below
Reporting-Information-Answer	RIA	8388719	3GPP TS 29.336 [5] clause 8.2.6 and clause 6.2.6 below
Connection-Management-Request	CMR	8388732	6.2.7
Connection-Management-Answer	CMA	8388732	6.2.8
MO-Data-Request	ODR	8388733	6.2.9
MO-Data-Answer	ODA	8388733	6.2.10
MT-Data-Request	TDR	8388734	6.2.11
MT-Data-Answer	TDA	8388734	6.2.12

For these commands, the Application-ID field shall be set to 16777346 (application identifier of the T6a/T6b interface application, allocated by IANA).

### 6.2.3 Configuration Information Request (CIR) Command

The Configuration Information Request (CIR) command, indicated by the Command-Code field set to 8388718 and the "R" bit set in the Command Flags field, is sent from:

- the SCEF to the MME/SGSN;
- the SCEF to the IWK-SCEF and
- the MME/SGSN to the IWK-SCEF



This command is originally defined in 3GPP TS 29.336 [5].

For the T6a/T6b interface, the Configuration-Information-Request command format is specified as following:

Message Format:

```
< Configuration-Information-Request > ::= < Diameter Header: 8388718, REQ, PXY, 16777346 >
< Session-Id >
[ DRMP ]
{ Auth-Session-State }
{ Origin-Host }
{ Origin-Realm }
[ Destination-Host ]
{ Destination-Realm }
*[ Supported-Features ]
*[ Monitoring-Event-Configuration ]
*[ Proxy-Info ]
*[ Route-Record ]
*[ AVP ]
```

## 6.2.4 Configuration-Information-Answer (CIA) Command

The Configuration-Information-Answer (CIA) command, indicated by the Command-Code field set to 8388718 and the "R" bit cleared in the Command Flags field, is sent from:

- the MME/SGSN to the SCEF;
- the IWK-SCEF to the SCEF and
- the IWK-SCEF to the MME/SGSN

This command is originally defined in 3GPP TS 29.336 [5].

For the T6a/T6b interface, the Configuration-Information-Answer command format is specified as following:

Message Format:

```
< Configuration-Information-Answer > ::= < Diameter Header: 8388718, PXY, 16777346 >
< Session-Id >
[ DRMP ]
[ Result-Code ]
[ Experimental-Result ]
{ Auth-Session-State }
{ Origin-Host }
{ Origin-Realm }
*[ Supported-Features ]
*[ Monitoring-Event-Report ]
*[ Monitoring-Event-Config-Status ]
[ Failed-AVP ]
*[ Proxy-Info ]
*[ Route-Record ]
*[ AVP ]
```

## 6.2.5 Reporting-Information-Request (RIR) Command

The Reporting-Information-Request (RIR) command, indicated by the Command-Code field set to 8388719 and the "R" bit set in the Command Flags field, is sent from:

- the MME/SGSN to the SCEF;
- the MME/SGSN to the IWK-SCEF and

- the IWK-SCEF to the SCEF.

This command is originally defined in 3GPP TS 29.336 [5].

For the T6a/T6b interface, the Reporting-Information-Request command format is specified as following:

Message Format:

```
< Reporting-Information-Request > ::= < Diameter Header: 8388719, REQ, PXY, 16777346 >
    < Session-Id >
    [ DRMP ]
    { Auth-Session-State }
    { Origin-Host }
    { Origin-Realm }
    [ Destination-Host ]
    { Destination-Realm }
    [ OC-Supported-Features ]
    *[ Supported-Features ]
    [ User-Identifier ]
    *[ Monitoring-Event-Report ]
    **[ Proxy-Info ]
    *[ Route-Record ]
    *[AVP]
```

## 6.2.6 Reporting-Information-Answer (RIA) Command

The Reporting-Information-Answer (RIA) command, indicated by the Command-Code field set to 8388719 and the "R" bit cleared in the Command Flags field, is sent from:

- the SCEF to the MME/SGSN;
- the SCEF to the IWK-SCEF and
- the IWK-SCEF to the MME/SGSN.

This command is originally defined in 3GPP TS 29.336 [5].

For the T6a/T6b interface, the Reporting-Information-Answer command format is specified as following:

Message Format:

```
< Reporting-Information-Answer > ::= < Diameter Header: 8388719, PXY, 16777346 >
    < Session-Id >
    [ DRMP ]
    [ Result-Code ]
    [ Experimental-Result ]
    { Auth-Session-State }
    { Origin-Host }
    { Origin-Realm }
    [ OC-Supported-Features ]
    [ OC-OLR ]
    *[ Load ]
    *[ Supported-Features ]
    *[ Monitoring-Event-Report-Status ]
    [ Failed-AVP ]
    *[ Proxy-Info ]
    *[ Route-Record ]
    *[AVP]
```

## 6.2.7 Connection-Management-Request (CMR) Command

The Connection-Management-Request (CMR) command, indicated by the Command-Code field set to 8388732 and the "R" bit set in the Command Flags field, is sent from:

- the MME or SGSN to the SCEF;
- the MME or SGSN to the SCEF via the IWK-SCEF for roaming cases;
- the SCEF to the MME or SGSN;
- the SCEF to the MME or SGSN via the IWK-SCEF for roaming cases.

For the T6a/b, T6ai/bi, T7 interfaces, the Connection-Management-Request command format is specified as following:

Message Format:

```

< Connection-Management-Request > ::= < Diameter Header: 8388732, REQ, PXY, 16777346 >
    < Session-Id >
    < User-Identifier >
    < Bearer-Identifier >
    [ DRMP ]
    { Auth-Session-State }
    { Origin-Host }
    { Origin-Realm }
    [ Destination-Host ]
    { Destination-Realm }
    [ OC-Supported-Features ]
    [ CMR-Flags ]
    [ Maximum-UE-Availability-Time ]
    *[ Supported-Features ]
    [ Connection-Action ]
    [ Service-Selection ]
    [ Serving-PLMN-Rate-Control ]
    [ Extended-PCO ]
    [ 3GPP-Charging-Characteristics ]
    [ RAT-Type ]
    [ Terminal-Information ]
    [ Visited-PLMN-Id ]
    [ APN-Rate-Control-Status ]
    *[ Proxy-Info ]
    *[ Route-Record ]
    *[AVP]

```

## 6.2.8 Connection-Management-Answer (CMA) Command

The Connection-Management-Answer (CMA) command, indicated by the Command-Code field set to 8388732 and the "R" bit cleared in the Command Flags field, is sent from:

- the SCEF to the MME or SGSN;
- the SCEF to the MME or SGSN via the IWK-SCEF for roaming cases;
- the MME or SGSN to the SCEF;
- the MME or SGSN to the SCEF via the IWK-SCEF for roaming cases.

For the T6a/b, T6ai/bi and T7 interfaces, the Connection-Management-Answer command format is specified as following:

Message Format:

```

< Connection-Management-Answer > ::= < Diameter Header: 8388732, PXY, 16777346 >
    < Session-Id >

```

```

[ DRMP ]
[ Result-Code ]
[ Experimental-Result ]
{ Auth-Session-State }
{ Origin-Host }
{ Origin-Realm }
[ OC-Supported-Features ]
[ OC-OLR ]
*[ Load ]
*[ Supported-Features ]
[ PDN-Connection-Charging-Id ]
[ Extended-PCO ]
[ APN-Rate-Control-Status ]
[ Failed-AVP ]
*[ Proxy-Info ]
*[ Route-Record ]
*[AVP]

```

## 6.2.9 MO-Data-Request (ODR) Command

The MO-Data-Request (ODR) command, indicated by the Command-Code field set to 8388733 and the "R" bit set in the Command Flags field, is sent from:

- the MME or SGSN to the SCEF;
- the MME or SGSN to the IWK-SCEF and
- the IWK-SCEF to the SCEF.

For the T6a/b, T6ai/bi, T7 interfaces, the MO-Data-Request command format is specified as following:

Message Format:

```

< MO-Data-Request > ::= < Diameter Header: 8388733, REQ, PXY, 16777346 >
< Session-Id >
< User-Identifier >
< Bearer-Identifier >
[ DRMP ]
{ Auth-Session-State }
{ Origin-Host }
{ Origin-Realm }
[ Destination-Host ]
{ Destination-Realm }
[ OC-Supported-Features ]
*[ Supported-Features ]
[ Non-IP-Data ]
*[ Proxy-Info ]
*[ Route-Record ]
[ RRC-Cause-Counter ]
*[AVP]

```

## 6.2.10 MO-Data-Answer (ODA) Command

The MO-Data-Answer (ODA) command, indicated by the Command-Code field set to 8388733 and the "R" bit cleared in the Command Flags field, is sent from:

- the SCEF to the MME or SGSN;
- the SCEF to the IWK-SCEF and
- the IWK-SCEF to the MME or SGSN.

For the T6a/b, T6ai/bi and T7 interfaces, the MO-Data-Answer command format is specified as following:

Message Format:

```

< MO-Data-Answer > ::= < Diameter Header: 8388733, PXY, 16777346 >
    < Session-Id >
    [ DRMP ]
    [ Result-Code ]
    [ Experimental-Result ]
    { Auth-Session-State }
    { Origin-Host }
    { Origin-Realm }
    [ OC-Supported-Features ]
    [ OC-OLR ]
    *[ Load ]
    *[ Supported-Features ]
    [ Failed-AVP ]
    *[ Proxy-Info ]
    *[ Route-Record ]
    *[AVP]

```

### 6.2.11 MT-Data-Request (TDR) Command

The MT-Data-Request (TDR) command, indicated by the Command-Code field set to 8388734 and the "R" bit set in the Command Flags field, is sent from:

- the SCEF to the MME or SGSN;
- the SCEF to the IWK-SCEF and
- the IWK-SCEF to the MME or SGSN.

For the T6a/b, T6ai/bi, T7 interfaces, the MT-Data-Request command format is specified as following:

Message Format:

```

< MT-Data-Request > ::= < Diameter Header: 8388734, REQ, PXY, 16777346 >
    < Session-Id >
    < User-Identifier >
    < Bearer-Identifier >
    [ DRMP ]
    { Auth-Session-State }
    { Origin-Host }
    { Origin-Realm }
    [ Destination-Host ]
    { Destination-Realm }
    [ OC-Supported-Features ]
    *[ Supported-Features ]
    [ Non-IP-Data ]
    [ SCEF-Wait-Time ]
    [ Maximum-Retransmission-Time ]
    *[ Proxy-Info ]
    *[ Route-Record ]
    *[AVP]

```

### 6.2.12 MT-Data-Answer (TDA) Command

The MT-Data-Answer (TDA) command, indicated by the Command-Code field set to 8388734 and the "R" bit cleared in the Command Flags field, is sent from:

- the MME or SGSN to the SCEF;
- the MME or SGSN to the IWK-SCEF and
- the IWK-SCEF to the SCEF.

For the T6a/b, T6ai/bi and T7 interfaces, the MT-Data-Answer command format is specified as following:

Message Format:

```

< MT-Data-Answer > ::= < Diameter Header: 8388734, PXY, 16777346 >
    < Session-Id >
    [ DRMP ]
    [ Result-Code ]
    [ Experimental-Result ]
    { Auth-Session-State }
    { Origin-Host }
    { Origin-Realm }
    [ OC-Supported-Features ]
    [ OC-OLR ]
    *[ Load ]
    [ Requested-Retransmission-Time ]
    *[ Supported-Features ]
    [ Failed-AVP ]
    *[ Proxy-Info ]
    *[ Route-Record ]
    [ TDA-Flags ]
    *[AVP]

```

## 6.3 Result-Code AVP and Experimental-Result AVP Values

### 6.3.1 General

This clause defines result code values that shall be supported by all Diameter implementations that conform to this specification.

### 6.3.2 Success

Result codes that fall within the Success category shall be used to inform a peer that a request has been successfully completed. The Result-Code AVP values defined in the Diameter base protocol specified in IETF RFC 6733 [32] shall be applied.

### 6.3.3 Permanent Failures

Errors that fall within the Permanent Failures category shall be used to inform the peer that the request has failed, and should not be attempted again. The Result-Code AVP values defined in the Diameter base protocol specified IETF RFC 6733 [32] shall be applied. When one of the result codes defined here is included in a response, it shall be inside an Experimental-Result AVP and the Result-Code AVP shall be absent.

#### 6.3.3.1 DIAMETER\_ERROR\_UNAUTHORIZED\_REQUESTING\_ENTITY (5510)

This result code shall be sent by the MME/SGSN or the IWK-SCEF to indicate that the SCEF is not allowed to request Monitoring services. This error code is defined in 3GPP TS 29.336 [5].

#### 6.3.3.2 DIAMETER\_ERROR\_UNAUTHORIZED\_SERVICE (5511)

This result code shall be sent by the MME/SGSN or the IWK-SCEF to indicate that the specific service requested by the SCEF is not allowed as per local policies. This error code is defined in 3GPP TS 29.336 [5].

#### 6.3.3.3 DIAMETER\_ERROR\_CONFIGURATION\_EVENT\_STORAGE\_NOT\_SUCCESSFUL (5513)

This result code shall be sent by the MME/SGSN to indicate that the specific service requested by the SCEF could not be stored. This error code is defined in 3GPP TS 29.336 [5].

#### 6.3.3.4 DIAMETER\_ERROR\_CONFIGURATION\_EVENT\_NON\_EXISTANT (5514)

This result code shall be sent by the IWK-SCEF to indicate that the requested deletion by the MME/SGSN could not be performed because the event does not exist. This error code is defined in 3GPP TS 29.336 [5].

#### 6.3.3.5 DIAMETER\_ERROR\_REQUESTED\_LOCATION\_NOT\_SERVED (5650)

This result code shall be sent by the MME/SGSN to indicate that the location for which a related monitoring event is configured (e.g. Number of UEs at a given geographical location) by the SCEF, is not served by the MME/SGSN.

#### 6.3.3.6 DIAMETER\_ERROR\_USER\_UNKNOWN (5001)

This result code shall be sent by the SCEF or the MME/SGSN to indicate that the user identified by the IMSI is unknown. This error code is defined in 3GPP TS 29.229 [4].

#### 6.3.3.7 DIAMETER\_ERROR\_OPERATION\_NOT\_ALLOWED (5101)

This result code shall be sent by the SCEF to indicate that the operation is not allowed when an EPS bearer context exists for the user. This error code is defined in 3GPP TS 29.329 [17].

This result code shall be sent by the SCEF or the MME/SGSN to indicate that the requested T6a/b connection action is not allowed.

#### 6.3.3.8 DIAMETER\_ERROR\_INVALID\_EPS\_BEARER (5651)

This result code shall be sent by the SCEF or the MME/SGSN to indicate that there is no bearer context for the user.

#### 6.3.3.9 DIAMETER\_ERROR\_NIDD\_CONFIGURATION\_NOT\_AVAILABLE (5652)

This result code shall be sent by the SCEF to indicate that there is no valid NIDD configuration available.

#### 6.3.3.10 DIAMETER\_ERROR\_SCEF\_REFERENCE\_ID\_UNKNOWN (5515)

This result code shall be sent by the SCEF to indicate that the SCEF reference ID is not known by the SCEF.

#### 6.3.3.11 DIAMETER\_ERROR\_USER\_TEMPORARILY\_UNREACHABLE (5653)

This result code shall be sent by the MME or SGSN to indicate that the UE is temporarily not reachable due to a power saving function, and that the MME or SGSN will update the SCEF when it detects that the UE is reachable or about to become reachable as specified in clause 5.6.3.

#### 6.3.3.12 DIAMETER\_ERROR\_UNREACHABLE\_USER (4221)

This result code shall be sent by the MME to indicate that the UE is not reachable. This error code is defined in 3GPP TS 29.172 [26].

## 6.4 AVPs

### 6.4.1 General

The following table specifies the Diameter AVPs defined for the T6a/T6b interface protocol, their AVP Code values, types, possible flag values and whether or not the AVP may be encrypted. The Vendor-ID header of all AVPs defined in this specification shall be set to 3GPP (10415).

For all AVPs which contain bit masks and are of the type Unsigned32, bit 0 shall be the least significant bit. For example, to get the value of bit 0, a bit mask of 0x00000001 should be used.

Table 6.4.1-1: T6a/T6b specific Diameter AVPs

Attribute Name	AVP Code	Clause defined	Value Type	AVP Flag rules				
				Must	May	Should not	Must not	May Encr.
Communication-Failure-Information	4300	6.4.4	Grouped	M,V				No
Cause-Type	4301	6.4.5	Unsigned32	M,V				No
S1AP-Cause	4302	6.4.6	Unsigned32	M,V				No
RANAP-Cause	4303	6.4.7	Unsigned32	M,V				No
BSSGP-Cause	4309	6.4.8	Unsigned32	M,V				No
GMM-Cause	4304	6.4.9	Unsigned32	M,V				No
SM-Cause	4305	6.4.10	Unsigned32	M,V				No
Number-Of-UE-Per-Location-Configuration	4306	6.4.11	Grouped	M,V				No
Number-Of-UE-Per-Location-Report	4307	6.4.12	Grouped	M,V				No
UE-Count	4308	6.4.13	Unsigned32	M,V				No
Connection-Action	4314	6.4.18	Unsigned32	M,V				No
Non-IP-Data	4315	6.4.19	OctetSstring	M,V				No
Serving-PLMN-Rate-Control	4310	6.4.21	Grouped	M,V				No
Uplink-Rate-Limit	4311	6.4.23	Unsigned32	M,V				No
Downlink-Rate-Limit	4312	6.4.22	Unsigned32	M,V				No
Extended-PCO	4313	6.4.26	OctetString	M,V				No
SCEF-Wait-Time	4316	6.4.24	Time	M,V				No
CMR-Flags	4317	6.4.25	Unsigned32	M,V				No
RRC-Cause-Counter	4318	6.4.27	Grouped	M,V				No
Counter-Value	4319	6.4.28	Unsigned32	M,V				No
RRC-Counter-Timestamp	4320	6.4.29	Time	M,V				No
TDA-Flags	4321	6.4.31	Unsigned32	V			M	No
Idle-Status-Indication	4322	6.4.32	Grouped	V			M	No
Idle-Status-Timestamp	4323	6.4.33	Time	V			M	No
Active-Time	4324	6.4.34	Unsigned32	V			M	No
Reachability-Cause	4325	6.4.35	Unsigned32	V			M	No
APN-Rate-Control-Status	4326	6.4.36	Grouped	V			M	No
Uplink-Number-Of-Packets-Allowed	4327	6.4.37	Unsigned32	V			M	No
Number-Of-Additional-Exception-Reports	4328	6.4.38	Unsigned32	V			M	No
Downlink-Number-Of-Packets-Allowed	4329	6.4.39	Unsigned32	V			M	No
APN-Rate-Control-Status-Validity-Time	4330	6.4.40	Unsigned64	V			M	No
NOTE 1: The AVP header bit denoted as "M" indicates whether support of the AVP is required. The AVP header bit denoted as "V" indicates whether the optional Vendor-ID field is present in the AVP header. For further details, see IETF RFC 6733 [32].								
NOTE 2: If the M-bit is set for an AVP and the receiver does not understand the AVP, it shall return a rejection. If the M-bit is not set for an AVP, the receiver shall not return a rejection, whether or not it understands the AVP. If the receiver understands the AVP but the M-bit value does not match with the definition in this table, the receiver shall ignore the M-bit.								

The following table specifies the Diameter AVPs re-used by the T6a/T6b interface protocol from existing Diameter Applications, including a reference to their respective specifications and when needed, a short description of their use within T6a/T6b.

Any other AVPs from existing Diameter Applications, except for the AVPs from Diameter Base Protocol, do not need to be supported. The AVPs from Diameter Base Protocol are not included in table 6.4.1-2, but they may be re-used for the T6a/T6b protocol.



**Table 6.4.1-2: T6a/T6b re-used Diameter AVPs**

Attribute Name	Reference	Comments
Monitoring-Event-Configuration	3GPP TS 29.336 [5]	This AVP shall contain the monitoring event to be configured at the MME/SGSN or the IWK-SCEF. See 6.4.2.
Monitoring-Event-Report	3GPP TS 29.336 [5]	This AVP shall contain the monitoring event reported by the MME/SGSN or the IWK-SCEF. See 6.4.3.
SCEF-Reference-ID	3GPP TS 29.336 [5]	
SCEF-ID	3GPP TS 29.336 [5]	
SCEF-Reference-ID-for-Deletion	3GPP TS 29.336 [5]	
Supported-Features	3GPP TS 29.229 [4]	
Feature-List-ID	3GPP TS 29.229 [4]	
Feature-List	3GPP TS 29.229 [4]	See 6.4.14
OC-Supported-Features	IETF RFC 7683 [9]	
OC-OLR	IETF RFC 7683 [9]	
Monitoring-Event-Config-Status	3GPP TS 29.336 [5]	This AVP shall contain the status of configuration of each monitoring event identified by an SCEF-ID and SCEF-Reference-ID.
DRMP	IETF RFC 7944 [15]	see 6.4.15
User-Identifier	3GPP TS 29.336 [5]	See 6.4.16
Bearer-Identity	3GPP TS 29.212 [10]	See 6.4.17
Monitoring-Type	3GPP TS 29.336 [5]	
Loss-Of-Connectivity-Reason	3GPP TS 29.336 [5]	
Maximum-Number-of-Reports	3GPP TS 29.336 [5]	
Monitoring-Duration	3GPP TS 29.336 [5]	
Charged-Party	3GPP TS 32.299 [20]	
UE-Reachability-Configuration	3GPP TS 29.336 [5]	
Location-Information-Configuration	3GPP TS 29.336 [5]	
Reachability-Information	3GPP TS 29.336 [5]	
EPS-Location-Information	3GPP TS 29.272 [16]	
Service-Selection	IETF RFC 5778 [21]	See 6.4.20
PDN-Connection-Charging-Id	3GPP TS 32.299 [22]	
Maximum-Retransmission-Time	3GPP TS 29.338 [27]	
Requested-Retransmission-Time	3GPP TS 29.338 [27]	
Maximum-UE-Availability-Time	3GPP TS 29.338 [27]	
3GPP-Charging-Characteristics	3GPP TS 29.061 [29]	
RAT-Type	3GPP TS 29.212 [10]	
Terminal-Information	3GPP TS 29.272 [16]	See 6.4.30
Visited-PLMN-Id	3GPP TS 29.272 [16]	
Load	IETF RFC 8583 [31]	
Subscribed-Periodic-RAU-TAU-Timer	3GPP TS 29.272 [16]	
Monitoring-Event-Report-Status	3GPP TS 29.336 [5]	
IMSI-Group-Id	3GPP TS 29.272 [16]	
Reporting-Time-Stamp	3GPP TS 29.336 [5]	
eDRX-Cycle-Length	3GPP TS 29.272 [16]	
DL-Buffering-Suggested-Packet-Count	3GPP TS 29.272 [16]	
PDN-Connectivity-Status-Report	3GPP TS 29.336 [5]	
SCEF-Reference-ID-Ext	3GPP TS 29.336 [5]	
SCEF-Reference-ID-for-Deletion-Ext	3GPP TS 29.336 [5]	

## 6.4.2 Monitoring-Event-Configuration

The Monitoring-Event-Configuration AVP is of type Grouped. It shall contain the Monitoring event configuration related data. It is originally defined in 3GPP TS 29.336 [5].

For the T6a/T6b interface, the Monitoring-Event-Configuration AVP format is specified as following:

AVP format:

Monitoring-Event-Configuration ::= <AVP header: 3122 10415>

[ SCEF-Reference-ID ]  
[ SCEF-Reference-ID-Ext ]  
{ SCEF-ID }  
{ Monitoring-Type }  
\*[ SCEF-Reference-ID-for-Deletion ]  
\*[ SCEF-Reference-ID-for-Deletion-Ext ]  
[ Maximum-Number-of-Reports ]  
[ Monitoring-Duration ]  
[ Charged-Party ]  
[ UE-Reachability-Configuration ]  
[ Location-Information-Configuration ]  
\*[ Number-Of-UE-Per-Location-Configuration ]  
\*[AVP]

When the "Extended Reference IDs" feature is supported by the SCEF and MME/SGSN, the SCEF-Reference-ID-Ext and SCEF-Reference-ID-for-Deletion-Ext AVPs shall be used instead of SCEF-Reference-ID and SCEF-Reference-ID-for-Deletion respectively.

## 6.4.3 Monitoring-Event-Report

The Monitoring-Event-Report AVP is of type Grouped. It shall contain the Monitoring event report data. It is originally defined in 3GPP TS 29.336 [5].

For the T6a/T6b interface, the Monitoring-Event-Report AVP format is specified as following:

AVP format:

Monitoring-Event-Report ::= <AVP header: 3123 10415>

{ SCEF-Reference-ID }  
[ SCEF-Reference-ID-Ext ]  
[ SCEF-ID ]  
[ Monitoring-Type ]  
[ Reachability-Information ]  
[ EPS-Location-Information ]  
[ Communication-Failure-Information ]

\*[ Number-Of-UE-Per-Location-Report ]  
[ Loss-Of-Connectivity-Reason ]  
[ Visited-PLMN-Id ]  
[ Idle-Status-Indication ]  
[ Reporting-Time-Stamp ]  
[ Maximum-UE-Availability-Time ]  
\*[ PDN-Connectivity-Status-Report ]  
[ Reachability-Cause ]  
\*[AVP]

The AVPs applicable for each Monitoring-Type reported by the MME/SGSN are specified under clause 5.2.2.

When the "Extended Reference IDs" feature is supported by the SCEF and MME/SGSN, the SCEF-Reference-ID-Ext AVP shall be used instead of SCEF-Reference-ID; in such case, the required AVP "SCEF-Reference-ID" shall be included in the grouped AVP by the sender, but its content shall be discarded by the receiver.

## 6.4.4 Communication-Failure-Information

The Communication-Failure-Information AVP is of type Grouped. It shall contain the reason for communication failure.

AVP format:

Communication-Failure-Information ::= <AVP header: 4300 10415>

[ Cause-Type ]  
[ S1AP-Cause ]  
[ RANAP-Cause ]  
[ BSSGP-Cause ]  
[ GMM-Cause ]  
[ SM-Cause ]  
\*[AVP]

## 6.4.5 Cause-Type

The Cause-Type AVP is of type Unsigned32 and it shall identify the type of the S1AP-Cause. The following values are defined:

RADIO\_NETWORK\_LAYER (0)

TRANSPORT\_LAYER (1)

NAS (2)

PROTOCOL (3)

MISCELLANEOUS (4)

## 6.4.6 S1AP-Cause

The S1AP-Cause AVP is of type Unsigned32. It shall contain a non-transparent copy of the S1AP cause code as specified clause 9.2.1.3 of 3GPP TS 36.413 [13]. The RAN cause sub-category of the S1AP-Cause as specified in 3GPP TS 36.413 [13] shall be encoded in the Cause-Type AVP as specified in clause 6.4.5 above.

## 6.4.7 RANAP-Cause

The RANAP-Cause AVP is of type Unsigned32. It shall contain the non-transparent copy of the cause value of the RANAP cause code as specified in clause 9.2.1.4 of 3GPP TS 25.413 [11].

## 6.4.8 BSSGP-Cause

The BSSGP-Cause AVP is of type Unsigned32. It shall contain the non-transparent copy of the cause value of the BSSGP "Cause" as specified in clause 11.3.8 in 3GPP TS 48.018 [14].

## 6.4.9 GMM-Cause

The GMM-Cause AVP is of type Unsigned32. It shall contain the GMM cause code as specified in clause 10.5.5.14 of 3GPP TS 24.008 [12].

## 6.4.10 SM-Cause

The SM-Cause AVP is of type Unsigned32. It shall contain the SM cause code as specified in clause 10.5.6.6 and 10.5.6.6A of 3GPP TS 24.008 [12].

## 6.4.11 Number-Of-UE-Per-Location-Configuration

The Number-Of-UE-Per-Location-Configuration AVP is of type Grouped. It shall contain the location information for which the number of UEs needs to be reported by the MME/SGSN.

AVP format:

```
Number-of-UE-Per-Location-Configuration ::= <AVP header: 4306 10415>
    { EPS-Location-Information }
    [ IMSI-Group-Id ]
    *[AVP]
```

## 6.4.12 Number-Of-UE-Per-Location-Report

The Number-Of-UE-Per-Location-Report AVP is of type Grouped. It shall contain the location information along with the number of UEs found at that location by the MME/SGSN.

AVP format:

```
Number-of-UE-Per-Location-Report ::= <AVP header: 4307 10415>
    { EPS-Location-Information }
    { UE-Count }
    [ IMSI-Group-Id ]
    *[AVP]
```

## 6.4.13 UE-Count

The UE-Count AVP is of type Unsigned32. It shall contain the number of UEs counted against a given criteria (say location information).

## 6.4.14 Feature-List AVP

### 6.4.14.1 Feature-List AVP for the T6a/T6b application

The syntax of this AVP is defined in 3GPP TS 29.229 [4].

For the T6a/b application, the meaning of the bits shall be as defined in table 6.4.14.1-1 for the Feature-List-ID.

**Table 6.4.14.1-1: Features of Feature-List-ID used in T6a/b**

Feature bit	Feature	M/O	Description
0	MONTE	O	<p>Configuration and reporting of monitoring events</p> <p>This feature is applicable to from an SCEF with CIR/CIA command pair and the reporting of events to the SCEF with RIR/RIA command pair.</p> <p>If the MME/SGSN does not support this feature, the SCEF shall not send monitoring event configurations to the HSS within CIR.</p>
1	NIDD	O	<p>Support of Non-IP Data service over T6a/b</p> <p>This feature is applicable to CMR/CMA, ODR/ODA and TDR/TDA command pairs.</p> <p>If the SCEF does not indicate support of this feature in an CMA, the MME or SGSN may store this information and not send any further CMR commands to that SCEF.</p>
2	Filtering	O	<p>Filtering Number of UEs present at given location by IMSI-Group</p> <p>This feature is applicable to the CIR/CIA command pair.</p> <p>If the MME/SGSN does not support this feature, the SCEF shall interpret the reported number of UEs per location as not being filtered by the provided IMSI-Group-Id.</p>
3	Extended Reference IDs	O	<p>Extended Reference IDs</p> <p>This feature is applicable for the CIR/CIA and RIR/RIA command pairs.</p> <p>If the SCEF detects that the MME/SGSN does not support this feature, it shall refrain from sending CIR commands containing 64-bit long SCEF Reference IDs.</p> <p>If the MME/SGSN detects that the SCEF does not support this feature, it shall refrain from sending RIR commands containing 64-bit long SCEF Reference IDs.</p>
<p>Feature bit: The order number of the bit within the Supported-Features AVP, e.g. "1".            Feature: A short name that can be used to refer to the bit and to the feature, e.g. "MONTE".            M/O: Defines if the implementation of the feature is mandatory ("M") or optional ("O").            Description: A clear textual description of the feature.</p>			

## 6.4.15 DRMP

The DRMP AVP is of type Enumerated and it is defined in IETF RFC 7944 [15]. This AVP allows the MME, the SGSN, the SCEF and the IWK-SCEF to indicate the relative priority of Diameter messages. The DRMP AVP may be used to set the DSCP marking for transport of the associated Diameter message.

## 6.4.16 User-Identifier

The User-Identifier AVP is of type Grouped and it contains the different identifiers used by the UE.

It is defined in 3GPP TS 29.336 [5]

## 6.4.17 Bearer-Identifier

The Bearer-Identifier AVP contains either the identity of the EPS bearer used to identify the T6a connection between the MME and the SCEF or the NSAPI of the PDP context identifying the T6b connection between the SGSN and the SCEF. It is defined in 3GPP TS 29.212 [10].

## 6.4.18 Connection-Action

The Connection-Action AVP is of type Unsigned32 and it shall identify the action to be performed on the T6a/b connection. The following values are defined:

CONNECTION\_ESTABLISHMENT (0)

This value shall be used if the T6a/b Connection-Management-Request applies to a T6a/b connection establishment.

CONNECTION\_RELEASE (1)

This value shall be used if the T6a/b Connection-Management-Request applies to a T6a/b connection release.

CONNECTION\_UPDATE (2)

This value shall be used if the T6a/b Connection-Management-Request applies to updating the properties of a T6a/b connection.

## 6.4.19 Non-IP-Data

The Non-IP-Data AVP is of type OctetString and it contains the Non-IP data conveyed between the MME or SGSN and the SCEF.

## 6.4.20 Service-Selection

The Service-Selection AVP is of type of UTF8String. This AVP shall contain the APN Network Identifier as specified in 3GPP TS 23.003 [24] clause 9.1.

The contents of the Service-Selection AVP shall be formatted as a character string composed of one or more labels separated by dots (".").

This AVP is originally defined in IETF RFC 5778[21].

## 6.4.21 Serving-PLMN-Rate-Control

The Serving-PLMN-Rate-Control AVP is of type Grouped and shall contain.

The AVP format shall conform to:

Serving-PLMN-Rate-Control ::= <AVP header: 4310 10415>

[ Uplink-Rate-Limit ]

[ Downlink-Rate-Limit ]

\*[AVP]

A Downlink-Rate-Limit set to 0 shall be interpreted that the Serving PLMN Rate Control for downlink messages is deactivated in the MME. If the Serving PLMN Rate Control is activated, the value of Downlink-Rate-Limit shall not be less than 10, see 3GPP TS 23.401 [25].

An Uplink-Rate-Limit set of 0 shall be interpreted that the Serving PLMN Rate Control for uplink messages is deactivated in the MME. If Serving PLMN Rate Control is activated, the value of Uplink-Rate-Limit shall not be less than 10, see 3GPP TS 23.401 [25].

## 6.4.22 Downlink-Rate-Limit

The Downlink-Rate-Limit AVP is of type type Unsigned32 and shall contain the maximum number of NAS Data PDUs per deci hour for this UE for downlink.

## 6.4.23 Uplink-Rate-Limit

The Uplink-Rate-Limit AVP is of type Unsigned32 and shall contain the maximum number of NAS Data PDUs per deci hour for this UE for uplink.

## 6.4.24 SCEF-Wait-Time

The SCEF-Wait-Time is of type Time and it shall contain the timestamp (in UTC) until which the SCEF expects a response.

## 6.4.25 CMR-Flags

The CMR-Flags AVP is of type Unsigned32 and it shall contain a bit mask. The meaning of the bits shall be as defined in table 6.4.25/1:

**Table 6.4.25/1: CMR-Flags**

Bit	Name	Description
0	UE-Reachable-Indicator	This bit if set indicates that the UE has become or is about to become reachable.
NOTE 1: Bits not defined in this table shall be cleared by the sending entity and discarded by the receiving entity.		

## 6.4.26 Extended-PCO

The Extended-PCO AVP is of type OctetString. The Extended-PCO AVP shall contain the value part of the ePCO IE, starting from octet 4, as specified in clause 9.9.4.26 of 3GPP TS 24.301[28].

## 6.4.27 RRC-Cause-Counter

The RRC-Cause-Counter AVP is of type Grouped and shall contain the number of receptions of "MO Exception data" and the time when the cause " MO Exception Data" is received for the first time.

The AVP format shall conform to:

RRC-Cause-Counter::= <AVP header: 4318 10415>

[ Counter-Value ]

[ RRC-Counter-Timestamp ]

\*[AVP]

## 6.4.28 Counter-Value

The Counter-Value AVP is of type type Unsigned32 and shall contain the number of occurrences of reception of RRC cause "MO Exception data".



## 6.4.29 RRC-Counter-Timestamp

The RRC-Counter-Timestamp AVP is of type Time and shall contain a timestamp.

## 6.4.30 Terminal-Information

The Terminal-Information AVP is of type Grouped. This AVP shall contain the information about the user's terminal. It is originally defined in 3GPP TS 29.272 [16].

AVP format

Terminal-Information ::= <AVP header: 1401 10415>

[ IMEI ]

[ Software-Version ]

\*[ AVP ]

## 6.4.31 TDA-Flags

The TDA-Flags AVP is of type Unsigned32 and it shall contain a bit map. The meaning of the bits shall be as defined in table 6.4.31-1:

**Table 6.4.31-1: TDA-Flags**

Bit	Name	Description
0	Acknowledged Delivery	This bit when set indicates that eNodeB has acknowledged the successful downlink NIDD delivery.
NOTE	Bits not defined in this table shall be cleared by the sending entity and discarded by the receiving entity.	

## 6.4.32 Idle-Status-Indication

The Idle-Status-Indication AVP is of type Grouped, and it shall contain the details when the UE transitions into idle mode.

AVP format:

Idle-Status-Indication ::= <AVP header: 4322 10415>

[ Idle-Status-Timestamp ]

[ Active-Time ]

[ Subscribed-Periodic-RAU-TAU-Timer ]

[ eDRX-Cycle-Length ]

[ DL-Buffering-Suggested-Packet-Count ]

\*[AVP]

The Subscribed-Periodic-RAU-TAU-Timer AVP shall contain the periodic TAU/RAU time granted to the UE by the MME/SGSN.

The eDRX-Cycle-Length AVP shall contain the eDRX cycle length granted to the UE by the MME/SGSN.

The DL-Buffering-Suggested-Packet-Count AVP shall contain the suggested number of downlink packets sent to the S-GW by the MME/SGSN.

### 6.4.33 Idle-Status-Timestamp

The Idle-Status-Timestamp AVP is of type Time and shall contain a timestamp (the time at which the UE transitioned into idle mode).

### 6.4.34 Active-Time

Active-Time AVP is of type Unsigned32 and shall provide the active time granted to the UE in seconds.

### 6.4.35 Reachability-Cause

The Reachability-Cause AVP is of type Unsigned32. The following values are defined:

CHANGE\_TO\_CONNECTED\_MODE (0)

REACHABLE\_FOR\_PAGING (1)

Annex A (normative):  
Diameter overload control mechanism

### 6.4.36 APN-Rate-Control-Status

The APN-Rate-Control-Status AVP is of type Grouped. It shall contain APN Rate Control Status Information as specified in figure 8.38-10 of 3GPP TS 29.274 [33].

### 6.4.37 Uplink-Number-Of-Packets-Allowed

The Uplink-Number-Of-Packets-Allowed AVP is of type Unsigned32. It shall contain information of octets k+1 to k+4 as specified in figure 8.38-10 of 3GPP TS 29.274 [33].

### 6.4.38 Number-Of-Additional-Exception-Reports

The Number-Of-Additional-Exception-Reports AVP is of type Unsigned32. It shall contain information of octets k+5 to k+8 as specified in figure 8.38-10 of 3GPP TS 29.274 [33].

### 6.4.39 Downlink-Number-Of-Packets-Allowed

The Downlink-Number-Of-Packets-Allowed AVP is of type Unsigned32. It shall contain information of octets k+9 to k+12 as specified in figure 8.38-10 of 3GPP TS 29.274 [33].

### 6.4.40 APN-Rate-Control-Status-Validity-Time

The APN-Rate-Control-Status-Validity-Time AVP is of type Unsigned64. It shall contain information of octets k+13 to k+20 as specified in figure 8.38-10 of 3GPP TS 29.274 [33].

---

## A.1 T6a/b and T7 interfaces

### A.1.1 General

The Diameter overload control mechanism is an optional feature over the T6a/b and T7 interface, which may be applied to the traffic of requests commands sent to the SCEF and/or to the traffic of request commands sent to the MME or SGSN.

It is recommended to make use of the IETF RFC 7683 [9] on the T6a/b and T7 interface where:

- when applied to the traffic of request commands sent to the SCEF, the SCEF shall behave as a reporting node while the MME/SGSN, and as an alternative the IWK-SCEF shall behave as a reacting node;
- when applied to the traffic of request commands sent to the MME or SGSN, the MME or SGSN shall behave as a reporting node while the SCEF, and as an alternative the IWK-SCEF, shall behave as a reacting node.

### A.1.2 SCEF behaviour

The SCEF requests traffic reduction from the MME/SGSN and the IWK-SCEF when it is in an overload situation, by including OC-OLR AVP in answer commands as described in IETF RFC 7683 [9].

The SCEF identifies that it is in an overload situation by implementation specific means. For example, the SCEF may take into account the traffic over the T6a/b interfaces or other interfaces, the level of usage of internal resources (CPU, memory), the access to external resources etc.

The SCEF determines the specific contents of the OC-OLR AVP in overload reports and the SCEF decides when to send OC-OLR AVPs by implementation specific means.

The SCEF may decide to deactivate Monitoring events to reduce the number of Reporting-Information-Requests sent for reporting monitoring events.

The SCEF shall apply required traffic reduction according to the OC-OLR AVPs received in answer commands from the MME to subsequent applicable requests, as per IETF RFC 7683 [9].

Requested traffic reduction is achieved by the SCEF by implementation specific means. It may in particular implement throttling of MT non-IP data messages.

### A.1.3 MME/SGSN behaviour

The MME or SGSN requests traffic reduction from the SCEF when it is in an overload situation, by including OC-OLR AVP in answer commands as described in IETF RFC 7683 [9].

The MME or SGSN identifies that it is in an overload situation by implementation specific means.

The MME or SGSN shall apply required traffic reduction according to the OC-OLR AVPs received in answer commands from the SCEF to subsequent applicable requests, as per IETF RFC 7683 [9].

Requested traffic reduction is achieved by the MME or SGSN by implementation-specific means. It may in particular implement:

- throttling of monitoring event reports or stop reporting with prioritization (e.g. prioritisation on the type of events, or that one-time reporting takes priority over continuous reporting, ...);
- throttling of new T6a/b connection establishment messages;
- throttling of MO non-IP data messages.

## A.1.4 IWK-SCEF behaviour

The IWK-SCEF, when acting as a reacting node towards the SCEF shall apply required traffic reduction received in answer commands from the SCEF to subsequent applicable requests received from the MME or SGSN, as per IETF RFC 7683 [9]. In this case the IWK-SCEF does not forward OC-OLR AVPs to the MME or SGSN.

The IWK-SCEF, when acting as a reacting node towards the MME or SGSN, shall apply required traffic reduction received in answer commands from the MME or SGSN to subsequent applicable requests received from the SCEF, as per IETF RFC 7683 [9]. In this case the IWK-SCEF does not forward OC-OLR AVPs to the SCEF.

Requested traffic reduction is achieved by the IWK-SCEF by implementation specific means. For example, it may implement throttling of monitoring event report with prioritization, throttling of MO data or MT data messages.

---

## Annex B (normative): Diameter message priority mechanism

### B.1 General

IETF RFC 7944 [15] specifies a Diameter routing message priority mechanism that allows Diameter nodes to indicate the relative priority of Diameter messages. With this information, other Diameter nodes may leverage the relative priority of Diameter messages into routing, resource allocation, set the DSCP marking for transport of the associated Diameter message, and also abatement decisions when overload control is applied.

---

### B.2 T6a, T6ai, T6b, T6bi, T7 interfaces

The Diameter message priority mechanism is an optional feature which may apply on one or several of the T6a, T6ai, T6b, T6bi, T7 interfaces.

It is recommended to make use of IETF RFC 7944 [15] over the T6a, T6ai, T6b, T6bi, T7 interfaces of an operator network when the overload control defined in Annex A is applied on these interfaces.

A 3GPP functional entity supporting the Diameter message priority mechanism over one or several of the T6a, T6ai, T6b, T6bi, T7 interfaces shall comply with IETF RFC 7944 [15].

A 3GPP functional entity sending a request shall determine the required priority according to its policies. When priority is required, it shall include the DRMP AVP indicating the required priority level in the request it sends, and shall prioritise the request according to the required priority level.

When the 3GPP functional element receives the corresponding response, it shall prioritise the received response according to the priority level received within the DRMP AVP if present in the response, otherwise according to the priority level of the corresponding request.

When a 3GPP functional entity receives a request, it shall handle the request according to the received DRMP AVP priority level. For the response, it may modify the priority level received in the DRMP AVP according to its policies and shall handle the response according to the required priority level. If the required priority level is different from the priority level received in the request, it shall include the DRMP AVP in the response.

If:

- a 3GPP functional entity supports using the Diameter message priority mechanism for DSCP marking purposes,
- the transport network utilizes DSCP marking, and
- message-dependant DSCP marking is possible for the protocol stack transporting Diameter,

then the 3GPP functional entity shall set the DSCP marking for transport of the request or response according to the required priority level.

The decisions of the 3GPP functional entity for a required priority and for the priority level value are implementation specific.

Diameter requests related to high priority traffic shall contain a DRMP AVP with a high priority of which the level value is operator dependent.

---

## Annex C (normative): Diameter load control mechanism

### C.1 General

The Diameter load control mechanism is an optional feature over the T6a/b and T7 interface, which may be applied to the traffic of request commands sent to the SCEF and/or to the traffic of request commands sent to the MME/SGSN.

It is recommended to make use of the IETF RFC 8583 [31] on the T6a/b and T7 interface where:

- when applied to the traffic of request commands sent to the SCEF, the MME/SGSN, and as an alternative the IWK-SCEF shall behave as a reacting node;
- when applied to the traffic of request commands sent to the MME/SGSN, the SCEF, and as an alternative the IWK-SCEF, shall behave as a reacting node.

---

### C.2 SCEF behaviour

When performing next hop Diameter Agent selection for requests that are routed based on realm, the SCEF may take into account load values from Load AVPs of type PEER received from candidate next hop Diameter nodes, as per IETF RFC 8583 [31].

---

### C.3 MME/SGSN behaviour

When performing next hop Diameter Agent selection for requests that are routed based on realm, the MME/SGSN may take into account load values from Load AVPs of type PEER received from candidate next hop Diameter nodes, as per IETF RFC 8583 [31].

---

### C.4 IWK-SCEF behaviour

When performing next hop Diameter Agent selection for requests that are routed based on realm, the IWK-SCEF may take into account load values from Load AVPs of type PEER received from candidate next hop Diameter nodes, as per IETF RFC 8583 [31].

## Annex D (informative): Change history



Date	TSG #	TSG Doc.	CR	Rev	Cat	Subject/Comment	New
2015-05						Skeleton of the TS after CT4#69	0.0.0
2015-11						TS after CT4#71	0.1.0
2015-12	CT#70	CP-150625				Presented for information	1.0.0
2016-02						TS after CT4#72	1.1.0
2016-03	CT#71	CP-160119				Presented for approval	2.0.0
2016-03	CT#71					Version 13.0.0. created after CT#71	13.0.0
2016-06	CT#72	CP-160225	0001	1		Correction on Table 6.4.1-2	13.1.0
2016-06	CT#72	CP-160225	0002	2		Correction on error handling for SCEF reference ID unknown	13.1.0
2016-06	CT#72	CP-160225	0004	1		Removing the direct configuration of MONTE events at MME via IWK-SCEF by the SCEF for roaming case	13.1.0
2016-06	CT#72	CP-160225	0008	3		Overload control update for Clot	13.1.0
2016-06	CT#72	CP-160225	0011	1		Corrections on styles	13.1.0
2016-06	CT#72	CP-160228	0003	-		Assignment of command codes for Clot	13.1.0
2016-06	CT#72	CP-160228	0005	4		Signaling the change of MME to the SCEF for a T6a connection used for SCEF PDN	13.1.0
2016-06	CT#72	CP-160228	0006	4		Procedures updates and new AVPs over T6a for Clot	13.1.0
2016-06	CT#72	CP-160228	0007	5		Connection Action check for CMR	13.1.0
2016-06	CT#72	CP-160228	0009	4		Routing considerations for Clot	13.1.0
2016-06	CT#72	CP-160228	0012	2		Serving PLMN Rate Control	13.1.0
2016-06	CT#72	CP-160228	0013	2		Clot support in introduction clause	13.1.0
2016-06	CT#72	CP-160228	0014	2		MT Non-IP Data Delivery for UEs using a power saving function	13.1.0
2016-06	CT#72	CP-160228	0015	2		Accept T6 Connection Establishment	13.1.0
2016-06	CT#72	CP-160228	0016	4		Support for APN Rate Control	13.1.0
2016-06	CT#72	CP-160228	0017	1		Charging Characteristics	13.1.0
2016-06	CT#72	CP-160228	0018	2		Corrections in clause 5.6.3 of "Detailed Behaviour of the MME"	13.1.0
2016-09	CT#73	CP-160427	0020	-		Adding missing result code	13.2.0
2016-09	CT#73	CP-160423	0021	1		Correction of Reference for ePCO	13.2.0
2016-09	CT#73	CP-160423	0023	-		MT-Data-Request command	13.2.0
2016-09	CT#73	CP-160424	0022	3		Handling of Exception Reports in the Core Network	13.2.0
2016-09	CT#73	CP-160424	0024	1		Sending of ePCO during the T6a connection release procedure	13.2.0
2016-09	CT#73	CP-160424	0025	1		Missing AVP codes and Experimental-Result codes for T6a	13.2.0
2016-09	CT#73	CP-160424	0027	1		SCEF Behaviour of Rate Control Handling	13.2.0
2016-09	CT#73	CP-160573	0028	2		Not Able to Deliver MO Non-IP Data	13.2.0
2016-09	CT#73	CP-160424	0029	1		T6a Connection Release after MO Data Answer with permanent error	13.2.0
2016-09	CT#73	CP-160424	0030	2		Addition of Serving PLMN ID and IMEISV to CMR	13.2.0
2016-09	CT#73	CP-160435	0031	1		T6b reference point for NonIP-GPRS	14.0.0
2016-12	CT#74	CP-160660	0033	1		AVAILABILITY_AFTER_DDN_FAILURE reporting	14.1.0
2016-12	CT#74	CP-160657	0035	1		Reference Correction	14.1.0
2016-12	CT#74	CP-160657	0038	1		Missing RRC-Cause-Counter AVP in the MO-Data-Request Command	14.1.0
2016-12	CT#74	CP-160681	0039	1		Load Control	14.1.0
2016-12	CT#74	CP-160680	0036	1		Updates to T6b for Non-IP GPRS	14.1.0
2016-12	CT#74	CP-160664	0041	-		Correction to change IETF drmp draft version to official RFC 7944	14.1.0
2017-03	CT#75	CP-170036	0042	1		Loss Of Connectivity Reason	14.2.0
2017-03	CT#75	CP-170036	0045	-		Failed-AVP AVP in Request Commands	14.2.0
2017-03	CT#75	CP-170036	0046	1		Bit ordering in Diameter AVPs used as bit-masks	14.2.0
2017-03	CT#75	CP-170039	0043	1		RAT-Type Change	14.2.0
2017-03	CT#75	CP-170039	0044	1		SCEF Initiated T6 Release	14.2.0
2017-03	CT#75	CP-170029	0048	1		Maximum UE Availability Time	14.2.0
2017-03	CT#75	CP-170048	0049	1		Update of reference for the Diameter base protocol	14.2.0
2017-03	CT#75	CP-170048	0050	-		Handling of the Vendor-Specific-Application-Id AVP	14.2.0
2017-03	CT#75	CP-170048	0051	-		Cardinality of the Failed-AVP AVP in answer	14.2.0
2017-03	CT#75	CP-170047	0052	-		Removal of Editor's Note on ePCO	14.2.0
2017-06	CT#76	CP-171029	0053	2		User Identify in RIR	14.3.0
2017-06	CT#76	CP-171018	0055	1		Support for signaling transport level packet marking	14.3.0
2017-09	CT#77	CP-172018	0056	1		Reliable Data Service Success cause	14.4.0
2017-09	CT#77	CP-172013	0060	-		Correction of DRMP Procedures	14.4.0

2017-09	CT#77	CP-172026	0057	2		Enhancements for NAPS on Idle Status Indication	15.0.0
2017-09	CT#77	CP-172026	0061	-		Enhancements for NAPS on Accuracy	15.0.0
2017-12	CT#78	CP-173017	0065	1		Fixing the R Bit in T6a Requests	15.1.0
2017-12	CT#78	CP-173028	0062	2		Monitoring Event Report Status	15.1.0
2018-03	CT#79	CP-180025	0066	1		Filtering the Report for Number of UEs in a Geographic Area	15.2.0
2018-06	CT#80	CP-181130	0067	1		Local deletion of Monitoring events	15.3.0
2018-12	CT#82	CP-183095	0068	3		Monitoring event report	15.4.0
2018-12	CT#82	CP-183098	0069	-		Missing parameters in IdleStatusIndication	15.4.0
2019-03	CT#83	CP-190038	0070	-		Missing Maximum-UE-Availability-Time AVP	15.5.0
2019-09	CT#85	CP-192094	0074	2		draft-ietf-dime-load published as RFC 8583	15.6.0
2019-09	CT#85	CP-192122	0072	1		Event type PDN Connectivity Status	16.0.0
2020-03	CT#87e	CP-200050	0075	-		Reachability Cause	16.1.0
2020-12	CT#90e	CP-203032	0076	-		Extended Reference ID	16.2.0
2021-06	CT#92e	CP-211072	0077	1		Idle Status Indication	16.3.0
2021-09	CT#93e	CP-212073	0078	1	F	APN Rate Control Status	16.4.0
2021-09	CT#93e	CP-212077	0079	-	F	Correction on NIDD Feature	16.4.0
2021-12						History table fixed	16.4.1
2022-03	CT#95e	CP-220077	0080	-	F	Correction to wrong CR implementation	16.5.0
2022-04	-	-	-	-		Update to Rel-17 version (MCC)	17.0.0
2022-12	CT#98e	CP-223071	0082	-	A	Idle Status Indication	17.1.0

---

# History

<b>Document history</b>		
V17.0.0	April 2022	Publication
V17.1.0	January 2023	Publication