

ETSI TS 101 530 V8.7.1 (2004-05)

Technical Specification

**Digital cellular telecommunications system (Phase 2+);
Location Services (LCS);
Base Station System Application Part
LCS Extension (BSSAP-LE)
(3GPP TS 09.31 version 8.7.1 Release 1999)**

GSM®
GLOBAL SYSTEM FOR
MOBILE COMMUNICATIONS

3GPP™

ETSI 

Reference

RTS/TSGG-020931v871

Keywords

GSM

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, send your comment to:

editor@etsi.org

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2004.
All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members.
TIPHONTM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Contents

Intellectual Property Rights	2
Foreword.....	2
Foreword.....	6
1 Scope	7
2 References	7
3 Definitions, abbreviations and symbols	8
4 Definition of BSSAP-LE.....	8
4.1 DTAP-LE Messages.....	8
4.2 BSSMAP-LE Messages	8
5 Procedures applicable to use of BSSAP-LE.....	9
5.1 Location Request.....	9
5.1.1 Successful Operation	9
5.1.2 Unsuccessful Operation	10
5.1.3 Abnormal Conditions.....	10
5.1.4 Overload	11
5.2 Connection Oriented Information Transfer	11
5.2.1 Successful Operation	11
5.2.2 Abnormal Conditions.....	12
5.2.3 Segmentation	12
5.3 Connectionless Information Transfer	12
5.3.1 Successful Operation	12
5.3.2 Unsuccessful Operation	12
5.3.3 Abnormal Conditions.....	13
5.3.4 Segmentation	13
5.4 LMU Connection Establishment	13
5.4.1 LMU Connection Establishment initiated by the SMLC	14
5.4.1.1 Successful Operation.....	14
5.4.1.2 Unsuccessful Operation	14
5.4.1.3 Abnormal Conditions	14
5.4.2 LMU Connection Establishment initiated by the MSC	14
5.4.2.1 Successful Operation.....	14
5.4.2.2 Unsuccessful Operation	15
5.4.2.3 Abnormal Conditions	15
5.5 LMU Connection Release	15
5.5.1 LMU Connection Release initiated by the SMLC	15
5.5.1.1 Successful Operation.....	15
5.5.1.2 Abnormal Conditions	15
5.5.2 LMU Connection Release initiated by the MSC.....	15
5.5.2.1 Successful Operation.....	15
5.5.2.2 Abnormal Conditions	15
5.6 DTAP-LE Information Transfer.....	16
5.6.1 DTAP-LE Information Transfer Initiated by the SMLC	16
5.6.2 DTAP-LE Information Transfer Initiated by the MSC.....	16
5.7 Reset.....	16
5.7.1 Normal Operation	16
5.7.2 Abnormal Conditions.....	16
6 Usage of BSSAP-LE and BSSAP on the Lb Interface.....	17
6.1 Applicable Message Sets.....	17
6.2 MTP Functions	18
6.3 SCCP Functions	18
6.3.1 General.....	18
6.3.2 Modifications for Connectionless SCCP	18

6.3.3	Modifications for Connection Oriented SCCP	18
6.3.4	Contents of the SCCP Data Field.....	19
6.3.5	Abnormal Conditions.....	19
7	Use of BSSAP-LE on the Ls Interface	20
7.1	Applicable Message Sets.....	20
7.2	MTP Functions	20
7.3	SCCP functions	20
7.3.1	General.....	20
7.3.2	Allowed Exceptions to CCITT Recommendations Q.711-714.....	20
7.3.3	Allowed Exceptions to ANSI T1.112	21
7.3.4	Usage of Connectionless SCCP	22
7.3.5	Usage of Connection Oriented SCCP	22
7.3.6	Contents of the SCCP Data Field.....	22
7.3.7	Content of DTAP-LE Messages	23
7.3.8	Abnormal Conditions.....	23
8	Use of BSSAP-LE on the Lp Interface.....	23
8.1	Applicable Message Sets.....	23
8.2	MTP Functions	24
8.3	SCCP functions	24
8.3.1	General.....	24
8.3.2	Allowed Exceptions to CCITT Recommendations Q.711-714.....	24
8.3.3	Allowed Exceptions to ANSI T1.112	24
8.3.4	Usage of Connectionless SCCP	25
8.3.5	Usage of Connection Oriented SCCP	25
8.3.6	Contents of the SCCP Data Field.....	25
9	Message Functional Definitions and Contents	25
9.1	BSSMAP-LE PERFORM LOCATION REQUEST message	25
9.1.1	Location Type	26
9.1.2	Cell Identifier.....	26
9.1.3	Classmark Information Type 3	26
9.1.4	LCS Client Type	26
9.1.5	Chosen Channel	26
9.1.6	LCS Priority.....	26
9.1.6a	LCS QoS.....	26
9.1.7	GPS Assistance Data	26
9.1.8	BSSLAP APDU.....	26
9.2	BSSMAP-LE PERFORM LOCATION RESPONSE message	27
9.2.1	Location Estimate	27
9.2.2	Positioning Data.....	27
9.2.3	Deciphering Keys	27
9.2.4	LCS Cause	27
9.3	BSSMAP-LE PERFORM LOCATION ABORT message	27
9.3.1	LCS Cause	27
9.4	BSSMAP-LE LMU CONNECTION REQUEST message	28
9.4.1	IMSI.....	28
9.4.2	Sender Address	28
9.4.3	Security	28
9.4.4	Call Number.....	28
9.5	BSSMAP-LE LMU CONNECTION ACCEPT message.....	28
9.5.1	Security	28
9.5.2	Call Number.....	29
9.6	BSSMAP-LE LMU CONNECTION REJECT message.....	29
9.6.1	Reject Cause	29
9.7	BSSMAP-LE LMU CONNECTION RELEASE message	29
9.7.1	Release Cause	29
9.8	BSSMAP-LE CONNECTION ORIENTED INFORMATION message	29
9.8.1	BSSLAP APDU.....	29
9.8.2	Segmentation	30
9.9	BSSMAP-LE CONNECTIONLESS INFORMATION message.....	30
9.9.1	Source Identity	30

9.9.2	Destination Identity.....	30
9.9.3	APDU	30
9.9.4	Segmentation	30
9.9.5	Return Error Request	30
9.9.6	Return Error Cause	30
9.10	BSSMAP-LE RESET message	31
9.11	BSSMAP-LE RESET ACKNOWLEDGE message	31
10	Message format and information element coding	31
10.1	Message type	32
10.2	Information Element Identifiers	32
10.3	APDU	32
10.4	Cause	33
10.5	Cell Identifier	33
10.6	Chosen Channel.....	33
10.7	Classmark Information Type 3.....	34
10.8	Deciphering Keys	34
10.9	Geographic Location	34
10.10	GPS Assistance Data	35
10.11	IMSI	36
10.12	ISDN Address	37
10.13	LCS Cause.....	37
10.14	LCS Client Type.....	38
10.15	LCS Priority	39
10.16	LCS QoS	39
10.17	LMU Cause	40
10.18	Location Type	40
10.19	Network Element Identity	41
10.20	Positioning Data	42
10.21	Return Error Request.....	43
10.22	Return Error Cause.....	43
10.23	Security	44
10.24	Segmentation.....	44
10.25	Signaling Point Code.....	45
Annex A (informative):	Change history	46
History		47

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The present document defines the coding of information in an extension of the Base Station System Application Part (BSSAP) that is needed to support location services on interfaces based on use of BSSAP.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies procedures and information coding that are needed to define and support the BSSAP LCS Extension (BSSAP-LE). The BSSAP-LE message set is applicable to the following GSM interfaces defined in 3GPP TS 03.71:

Lb interface (BSC-SMLC).

Ls interface (MSC-SMLC).

Lp interface (SMLC-SMLC).

The present document defines message formats and encoding for BSSAP-LE and the particular subsets of it that are applicable to each of the above interfaces. The present document also defines the support for BSSAP-LE message transfer on each of these interfaces using CCITT and ANSI versions of SS7 MTP and SCCP. Additional requirements for the above interfaces that are applicable to BSSAP-LE are also defined – e.g. usage of BSSAP (as defined in 3GPP TS 04.08 and 08.08) on the Lb interface.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 01.04: "Abbreviations and acronyms".
- [1a] 3GPP TS 23.032: "Universal Geographical Area Description (GAD)".
- [2] 3GPP TS 03.71: "Location Services (LCS); (Functional description) - Stage 2"
- [3] 3GPP TS 04.08: "Mobile radio interface layer 3 specification".
- [4] 3GPP TS 04.31: "Location Services (LCS); Mobile Station (MS) – Serving Mobile Location Center (SMLC); Radio Resource LCS Protocol (RRLP)."
- [5] 3GPP TS 04.71: "Mobile radio interface layer 3 Location Services (LCS) specification".
- [6] 3GPP TS 08.06: "Signaling transport specification mechanism for the Base Station Subsystem – Mobile-services Switching Centre (BSS - MSC) interface".
- [7] 3GPP TS 08.08: "Mobile-services Switching Centre – Base Station System (MSC-BSS) interface; Layer 3 specification"
- [8] 3GPP TS 08.31: "Location Services (LCS); Serving Mobile Location Center (SMLC) – Serving Mobile Location Center (SMLC); SMLC Peer Protocol (SMLCPP)."
- [9] 3GPP TS 08.71: "Location Services (LCS); Serving Mobile Location Center – Base Station Subsystem (SMLC-BSS) interface Layer 3 specification."
- [10] 3GPP TS 09.02: "Mobile Application Part (MAP) specification".
- [11] CCITT Recommendation Q.702: "Specifications of Signalling System No. 7 - Signalling data link".

- [12] CCITT Recommendation Q.703: "Signalling link".
- [13] CCITT Recommendation Q.704: "Signalling network functions and messages".
- [14] CCITT Recommendation Q.707: "Specifications of Signalling System No. 7 - Testing and maintenance".
- [15] CCITT Recommendation Q.711: "Functional description of the signalling connection control part".
- [16] CCITT Recommendation Q.712: "Definition and function of SCCP messages".
- [17] CCITT Recommendation Q.713: "SCCP formats and codes".
- [18] CCITT Recommendation Q.714: "Signalling connection control part procedures".
- [19] ANSI T1.111-1996 - Signalling System Number 7 (SS7) – Message Transfer Part (MTP)
- [20] ANSI T1.112-1996 - Signalling System Number 7 (SS7) - Signalling Connection Control Part (SCCP).
- [21] TIA/EIA/IS-J-STD-036 – Enhanced Wireless 9-1-1 Phase II, August 2000.

3 Definitions, abbreviations and symbols

Unless listed below, all definitions, symbols and abbreviations used in the present document are listed in 3GPP TS 01.04 and 3GPP TS 03.71.

4 Definition of BSSAP-LE

BSSAP-LE is an extension to BSSAP that contains messages and parameters specific to the support of LCS. The following subsets of BSSAP-LE are defined: DTAP-LE, BSSMAP-LE.

4.1 DTAP-LE Messages

DTAP-LE messages are transferred between an SMLC and a Type A LMU and comprise the following individual messages:

REGISTER

FACILITY

RELEASE COMPLETE

The content, encoding and certain procedures associated with DTAP-LE messages are defined in 3GPP TS 04.71.

4.2 BSSMAP-LE Messages

BSSMAP-LE messages are transferred between a BSC, MSC and SMLC and comprise the following individual messages:

BSSMAP-LE Positioning Messages

Perform Location Request

Perform Location Response

Perform Location Abort

BSSMAP-LE LMU Control Messages

LMU Connection Request

LMU Connection Accept

LMU Connection Reject

LMU Connection Release

BSSMAP-LE Information Messages

Connection Oriented Information

Connectionless Information

BSSMAP-LE General Messages

Reset

Reset Acknowledge

The content and encoding of BSSMAP-LE messages are defined in this specification.

5 Procedures applicable to use of BSSAP-LE

5.1 Location Request

The Location Request procedure is applicable to the Lb and Ls interfaces. Its purpose is to obtain a location estimate for a target MS that is already in dedicated mode. It is also used to provide an MS with LCS assistance data or with a deciphering key for LCS broadcast assistance data. The initiator of a location request may be either the serving BSC or the visited MSC for the MS. The procedure makes use of SCCP connection oriented signaling on the Lb and Ls interfaces.

5.1.1 Successful Operation

The initiator of the location request (VMSC or serving BSC) sends a BSSMAP-LE Perform Location Request to the SMLC associated with the current serving cell for the target MS. The message contains the following mandatory (M), conditional (C) and optional (O) information, where conditional parameters are required if available.

Location Type (M)

Cell Identifier (M)

Classmark Information Type 3 (C)

LCS Client Type (C)

Chosen Channel (C)

LCS Priority (C)

LCS QoS (C)

Requested GPS Assistance Data (C)

BSSLAP APDU (C)

If requested, the SMLC performs positioning of the target MS using a particular position method or a combination of more than one positioning method. If the Classmark Information Type 3 IE is not present, the SMLC shall instigate only network based positioning methods (e.g. TOA or TA but not GPS or E-OTD). Alternatively, if requested otherwise, the SMLC may provide positioning assistance data to the MS. The SMLC may invoke the following other BSSAP-LE procedures to perform these procedures:

connection oriented information transfer

connectionless information transfer

LMU connection establishment

LMU connection release

DTAP-LE information transfer

For an SMLC accessed over the Lb interface by a BSC initiator, additional procedures defined in 3GPP TS 04.08 and 3GPP TS 08.08 may also be performed. If a location estimate was requested and was subsequently obtained, the SMLC shall return a BSSMAP-LE Perform Location Response to the initiator of the location request (serving BSC or VMSC). This message contains the following mandatory, conditional and optional parameters.

Location Estimate (M)

Positioning Data (C)

Restrictions on the geographic shape encoded within the Location Estimate parameter may exist for certain LCS client types. The SMLC shall comply with any restrictions defined in GSM Release 99 and 3G Release 99 and, in a particular country, with any restrictions defined for a specific LCS client type in relevant national standards. For example, in the US, national interim standard TIA/EIA/IS-J-STD-036 restricts the geographic shape for an emergency services LCS client to minimally either an "ellipsoid point" or an "ellipsoid point with uncertainty circle and confidence" as defined in 3G TS 23.032.

If assistance data was instead requested for an MS and the SMLC was able successfully to transfer this to the MS, the SMLC shall return a BSSMAP-LE Perform Location Response to the initiator of the location request (serving BSC or VMSC). This message shall contain no parameters. The absence of an LCS Cause parameter in this case implies that the transfer was successful.

Otherwise, if a deciphering key was requested for LCS broadcast assistance data and the SMLC has access to the appropriate keys, the SMLC shall return a BSSMAP-LE Perform Location Response to the initiator of the location request (serving BSC or VMSC). This message contains the following mandatory parameters.

Deciphering Keys (M)

5.1.2 Unsuccessful Operation

If the SMLC is unable to obtain any of the location information requested or if requested LCS assistance data could not be transferred or requested deciphering keys for broadcast assistance data could not be returned, the SMLC shall return a BSSMAP-LE Perform Location Response to the initiator of the Location Request carrying the following parameters:

LCS Cause (M)

Positioning Data (O)

If assistance data or deciphering keys for a specific positioning method is not supported in the network or in the location area, the SMLC shall indicate this with LCS Cause value "Position method failure" accompanied with diagnostic value "Position Method Not Available in Network" or "Position Method Not Available in Location Area".

5.1.3 Abnormal Conditions

If an ongoing location request is preempted at the initiator by an inter-BSC handover or if the main signaling link to the target MS is lost or released or if there is a timeout waiting for the positioning response, the initiator shall send a BSSMAP-LE Perform Location Abort to the SMLC containing the following parameters.

LCS Cause (M)

On receipt of this message, the SMLC shall stop positioning of the target MS and may release any resources (e.g. LMUs) previously allocated. If the SMLC has not yet returned a BSSMAP-LE Perform Location Response to the initiator, it shall return this message containing an LCS Cause indicating an abort and, optionally, positioning data. The initiator shall then release the SCCP connection. If the SMLC cannot proceed with positioning due to some protocol violation or error condition (e.g. inter-BSC handover indication received from the serving BSC), it shall return a BSSMAP-LE Perform Location Response to the initiator containing an LCS cause and, optionally, positioning data. The initiator need not reply at the BSSAP-LE level to this message. However, the initiator may return a BSSMAP-LE perform Location Abort which shall not be treated as an error by the SMLC.

5.1.4 Overload

If the SMLC is in an overload condition, it may reject a BSSMAP-LE Perform Location request by returning a BSSMAP-LE Perform Location response containing an LCS Cause parameter indicating congestion. The initiator of the location service request (MSC or BSC) may reduce the frequency of future location service requests until rejection due to overload has ceased. In reducing the frequency of location service requests, an MSC or BSC shall reduce lower priority requests, to zero if necessary, before reducing the frequency of higher priority requests. An SMLC shall similarly reject location service requests of a lower priority, to zero if necessary, due to overload before rejecting location service requests of a higher priority. An SMLC in an overload condition may optionally employ the following procedures to alleviate overload:

- a) Allow higher priority location service requests to preempt lower priority requests for which location service procedures are already in progress
- b) Abort lower priority location service requests already in progress.
- c) Reduce the supported QoS for lower priority requests for a location estimate – e.g. by reducing accuracy or increasing response time
- d) Employ MS based positioning methods, where supported by the target MS and SMLC, rather than MS assisted or network based methods (except TA).

The priority of a location service request shall be defined according to the value in the LCS Priority parameter. If this parameter is absent in a BSSMAP-LE Perform Location request, the lowest priority shall be assumed.

5.2 Connection Oriented Information Transfer

The Connection Oriented Information transfer procedure is applicable to the Lb and Ls interfaces. It enables both way transfer of BSSLAP messages between an SMLC and the BSC serving a target MS. The initiator of the procedure can be either the BSC serving the target MS, the visited MSC for the target MS or the SMLC. The procedure is only valid while a location request procedure for the target MS is ongoing. The procedure makes use of SCCP connection oriented signaling on the Lb and Ls interfaces and uses the same SCCP connection as the location request procedure for the particular target MS.

5.2.1 Successful Operation

An SMLC, MSC or BSC with a BSSLAP message or message segment to transfer concerning a particular target MS sends a BSSMAP-LE Connection Oriented Information message to a recipient carrying the following parameters:

- BSSLAP APDU (M)
- Segmentation (C)

If the sender is an NSS based SMLC, the message is transferred to the VMSC for the target MS. The recipient MSC shall then transfer the message to the serving BSC using procedures defined in 3GPP TS 08.08.

If the sender is a BSS based SMLC, the message is transferred to the serving BSC for the target MS. The BSC shall then perform the positioning operation requested by the BSSLAP APDU (refer to 3GPP TS 08.71). If the BSSLAP APDU contains an RRLP APDU, the BSC shall transfer this to the target MS.

If the sender is a BSC or MSC and the intended recipient is the SMLC for a target MS, the message is transferred to the SMLC. The SMLC shall then perform interpretation of the BSSLAP APDU.

5.2.2 Abnormal Conditions

At an intermediate entity, if a received BSSMAP-LE Connection Oriented Information message contains unrecognized information or if the message cannot be sent on, the message shall be discarded.

At the recipient entity, if a received BSSMAP-LE Connection Oriented Information message contains invalid or unrecognized information as defined for BSSMAP-LE, any ongoing positioning procedure shall be terminated and associated resources may be released. If the recipient is a BSC, the SMLC shall be notified – e.g. using a BSSLAP Reject or Abort. If the recipient is an SMLC, a new positioning attempt (e.g. using a different position method) may be started.

5.2.3 Segmentation

The Segmentation parameter shall not be included if the BSSLAP message is not segmented.

If the size of an embedded BSSLAP message is too large to fit into one BSSMAP-LE message, the sending entity divides the BSSLAP message to a necessary number of BSSMAP-LE messages each containing a BSSLAP APDU IE and a Segmentation IE. In the BSSLAP APDU IE it includes as many octets as possible.

The segmentation IE contains a segment number field and an indication of the final segment. Message identification shall not be used. The order number of a segment in the Segment Number field in the Segmentation IE is incremented by one starting from zero, i.e. the value is 0 for the first segment, 1 for the next and so on. The receiving entity may use the segment number in order to recognize the start of a new BSSLAP message and verify that all segments were reliably transferred.

In case of handover interrupting the information transfer procedure, the exception procedures described in 3GPP TS 03.71 shall be used.

5.3 Connectionless Information Transfer

The Connectionless Information transfer procedure is applicable to the Lb, Ls and Lp interfaces. It enables both way transfer of LLP messages between an SMLC and a Type B LMU. The procedure also enables both way transfer of SMLCPP messages between two SMLCs. The initiator of the procedure can be a BSC, MSC or SMLC. The procedure makes use of SCCP connectionless signaling.

5.3.1 Successful Operation

An SMLC, MSC or BSC needing to transfer an LLP message concerning a Type B LMU or an SMLCPP message sends a BSSMAP-LE Connectionless Information message to a recipient carrying the following parameters:

Source Entity (M)

Destination Entity (M)

APDU (M)

Segmentation (C)

Return Error Request (O)

The source entity identifies the sender. The recipient entity identifies the final destination. The Segmentation IE provides segmentation and message identification for a segmented APDU. The Return Error Request may be included to request notification in the event of unsuccessful transfer and indicate the type of notification needed. If the recipient entity is not the final destination, the recipient shall transfer the BSSMAP-LE Connectionless Information message to either the final destination or an intermediate MSC or BSC capable of onward transfer to the final destination.

5.3.2 Unsuccessful Operation

If the message cannot be transferred by an intermediate entity or destination entity (e.g. reassembly of a segmented message fails) and the Return Error Request is not included, the message shall be discarded. If the Return Error Request

is included, the intermediate or destination entity shall, depending on the Return Error Request type, send a BSSMAP-LE Connectionless Information message to, or towards, the original source containing the following parameters:

Source Entity (M)

Destination Entity (M)

APDU (C)

Segmentation (C)

Return Error Cause (M)

The Source entity shall indicate the Destination Entity in the original received message. The Destination Entity shall indicate the Source Entity in the original message. The Return Error cause shall indicate the reason for unsuccessful transfer. The APDU and Segmentation IEs shall, depending on the the Return Error Request type, contain any originally received APDU and Segmentation IEs, respectively.

If a received BSSMAP-LE Connectionless Information message containing a Return Error Cause cannot be transferred by an intermediate entity, it shall be discarded with no return error message.

5.3.3 Abnormal Conditions

At an intermediate entity, if a received BSSMAP-LE Connectionless Information message contains unrecognized or invalid information, the message shall be discarded.

At the recipient entity, if a received BSSMAP-LE Connectionless Information message contains invalid or unrecognized information as defined for BSSAP-LE, the message shall be discarded.

5.3.4 Segmentation

The Segmentation parameter shall not be included if the APDU is not segmented.

If the size of an APDU containing an embedded SMLCPP message is too large to fit into one BSSMAP-LE message, the sending entity divides the SMLCPP message to a necessary number of BSSMAP-LE messages each containing an APDU IE and a Segmentation IE. In the APDU IE it includes as many octets as possible

The segmentation IE contains a segment number, an indication of the final segment and the message ID. The order number of a segment in the Segment Number field in the APDU IE is incremented by one starting from zero, i.e. the value is 0 for the first segment, 1 for the next and so on. The receiving entity recognizes that a segment is missing or duplicated, when:

- There is more than one segment with the same segment number and same Message ID.
- The segment number does not increase by steps of one starting from zero.

If the recipient recognizes a missing or duplicated element, it shall discard the entire message (i.e. all received segment with the message ID).

The message identity in the Message ID field in the APDU IE is used to recognize a particular message to which that segment belongs. The sending entity can select any of the available values (0-65535) that is not currently used between it and the receiving entity.

If an APDU segment is received with Return Error cause IE (due to invocation of the return error option), reassembly does not apply and the APDU segment and error cause maybe returned to the original source application.

5.4 LMU Connection Establishment

The LMU Connection Establishment procedure is applicable to the Ls interface. Its purpose is to establish a signaling connection between an SMLC and Type A LMU via the visited MSC for the LMU. The procedure can be initiated by either the SMLC or MSC. The procedure makes use of SCCP connection oriented signaling on the Ls interface.

5.4.1 LMU Connection Establishment initiated by the SMLC

5.4.1.1 Successful Operation

The SMLC sends a BSSMAP-LE LMU Connection Request message to the VMSC for the LMU. This message contains the following parameters.

IMSI (M)

Sender Address (O)

Security (C)

The IMSI identifies the LMU. The sender address, if included, identifies the SMLC. The Security parameter shall be included if authentication or ciphering of the LMU are required. On receipt of this message, the MSC shall attempt to establish a signalling link to the LMU (refer to 3GPP TS 03.71). Authentication and ciphering shall be invoked if requested by the SMLC. Once the signaling link has been established, the MSC shall return a BSSMAP-LE LMU Connection Accept to the SMLC with the following parameters.

Call Number (O)

The call number shall be included if the MSC has the capability to support signaling to an LMU using a traffic channel (refer to 3GPP TS 03.71).

5.4.1.2 Unsuccessful Operation

If the LMU is not recognized in the MSC (e.g. no VLR record) or a signaling link cannot be setup to the LMU (e.g. paging of the LMU fails) or authentication or ciphering cannot be performed when requested by the SMLC, any signaling link to the LMU shall be released, if not required for other MM or CM procedures and a BSSMAP-LE LMU Connection Reject shall be returned to the SMLC with the following parameters.

Reject Cause (M).

5.4.1.3 Abnormal Conditions

If the SMLC or MSC detects release of the SCCP connection on the Ls interface for an LMU, the connection establishment procedure shall be considered to have failed and any associated resources may be released.

5.4.2 LMU Connection Establishment initiated by the MSC

5.4.2.1 Successful Operation

The MSC shall initiate the LMU connection establishment procedure when no LMU connection to the SMLC currently exists and the MSC receives a CM Service Request from the LMU specifying the LCS service. The MSC shall then send a BSSMAP-LE LMU Connection Request message to the SMLC associated with either the IMSI or current cell location of the LMU. This message shall contain the following parameters.

IMSI (M)

Sender Address (M)

Call Number (C)

The IMSI identifies the LMU. The sender address identifies the MSC. The call number shall be included if the MSC has the capability to support signaling to an LMU using a traffic channel (refer to 3GPP TS 03.71). On receipt of this message, the SMLC shall return a BSSMAP-LE LMU Connection Accept to the MSC with the following parameters.

Security (C)

The Security parameter shall be included if authentication or ciphering of the LMU are required. On receipt of this message, the MSC shall perform authentication and/or ciphering if requested by the SMLC and shall complete the establishment of an MM connection to the LMU to support LCS.

5.4.2.2 Unsuccessful Operation

If the LMU is not recognized in the SMLC or a signaling connection cannot be supported (e.g. due to congestion), a BSSMAP-LE LMU Connection Reject shall be returned to the MSC with the following parameters.

Reject Cause (M)

The MSC shall then reject the CM service request from the LMU.

5.4.2.3 Abnormal Conditions

If the SMLC or MSC detects release of the SCCP connection on the Ls interface for an LMU, the connection establishment procedure shall be considered to have failed and any associated resources may be released.

5.5 LMU Connection Release

The LMU Connection Release procedure is applicable to the Ls interface. Its purpose is to release a signaling connection between an SMLC and Type A LMU. The procedure can be initiated by either the SMLC or MSC. The procedure makes use of SCCP connection oriented signaling on the Ls interface.

5.5.1 LMU Connection Release initiated by the SMLC

5.5.1.1 Successful Operation

The SMLC sends a BSSMAP-LE LMU Connection Release message to the VMSC for the LMU. This message contains the following parameters.

Release Cause (M)

On receipt of this message, the MSC shall release the main signaling link to the LMU unless required for other ongoing MM and CM procedures in the MSC. The MSC shall also initiate release of the SCCP connection to the SMLC for the LMU.

5.5.1.2 Abnormal Conditions

The SMLC may initiate release of the signaling connection to an LMU by initiating release of the SCCP connection for the LMU to the MSC. The MSC shall then release the main signaling link to the LMU unless required for other ongoing MM or CM procedures.

5.5.2 LMU Connection Release initiated by the MSC

5.5.2.1 Successful Operation

The MSC shall initiate release of an LMU connection to an SMLC if the main signaling link to the LMU is released. The MSC sends a BSSMAP-LE LMU Connection Release message to the SMLC for the LMU. This message contains the following parameters.

Release Cause (M)

On receipt of this message, the SMLC should initiate release of the SCCP connection to the MSC for the LMU.

5.5.2.2 Abnormal Conditions

The MSC may initiate release of the signaling connection between an SMLC and LMU by initiating release of the SCCP connection for the LMU to the SMLC.

5.6 DTAP-LE Information Transfer

The DTAP-LE Information transfer procedure is applicable to the Ls interface. It supports bothway LLP message transfer between an NSS based SMLC and Type A LMU. The procedure is only valid when a signaling connection between an SMLC and Type A LMU has been established. The procedure uses SCCP connection oriented signaling using the SCCP connection previously established between the SMLC and MSC when the signaling connection between the SMLC and LMU was established.

5.6.1 DTAP-LE Information Transfer Initiated by the SMLC

The SMLC initiates the procedure when it has an LLP message to transfer to a type A LMU. The message may first be segmented. The SMLC shall then transfer each LLP segment to the MSC inside a DTAP-LE REGISTER, FACILITY or RELEASE COMPLETE message. The usage of these messages is as defined in 3GPP TS 04.71. The MSC relays each DTAP-LE message to the LMU.

5.6.2 DTAP-LE Information Transfer Initiated by the MSC

The MSC initiates the procedure when a DTAP message is received from an LMU containing the LCS protocol discriminator. The MSC then relays the DTAP message to the SMLC.

5.7 Reset

The reset procedure is an optional procedure within a PLMN applicable to the Lb and Ls interfaces. It enables an SMLC, MSC or BSC that has undergone a failure with loss of memory of LMU signalling connections and location service transactions to indicate this to a partner entity (SMLC, MSC or BSC). The recipient entity can then release its own connection and transaction resources. The reset procedure may not be applicable when only a limited part of an SMLC, MSC or BSC has suffered a failure, since error recovery procedures specific to individual connections and transactions may then be used.

5.7.1 Normal Operation

In the event of a failure at an SMLC, MSC or BSC that results in the loss of LMU connection information and location service information, a Reset message may be sent to the partner SMLC, MSC or BSC across the Lb or Ls interface. The message carries no parameters and is sent using connectionless SCCP procedures. The sending entity shall ensure that all information on LMU connections and location service transactions to the other entity is reinitialized to indicate no existing connections and transactions.

On receiving a Reset message, the recipient SMLC, MSC or BSC shall clear all references and state information for LMU connections and location service transactions to the sending entity and shall release any associated resources including, in the case of a recipient MSC or BSC, any signaling connections or circuit connections to LMUs controlled by a sending SMLC. The recipient entity shall then return a Reset Acknowledge message.

For a reset on the Lb interface where the SMLC and BSC support circuit connections to LMUs (in addition to signaling connections), the entity that does not control assignment of circuits shall initiate blocking procedures (Block or Circuit Group Block procedure as defined in 3GPP TS 08.08) for all circuits that are locally blocked on its own side. The initiation of blocking may occur before sending or receipt, whichever applies, of the Reset Acknowledge.

5.7.2 Abnormal Conditions

If an initiating SMLC, MSC or BSC receives no response to a Reset message following an O&M administered time period, it shall resend the Reset message. For successive no response conditions, sending shall occur a maximum of "n" times, where "n" is an O&M administered parameter. Following "n" unsuccessful, reset attempts, the procedure shall be terminated and maintenance shall be informed.

6 Usage of BSSAP-LE and BSSAP on the Lb Interface

6.1 Applicable Message Sets

The following BSSAP-LE message sets are applicable to the Lb interface between an SMLC and BSC:

- All DTAP-LE messages
- All BSSMAP-LE positioning messages
- All BSSMAP-LE information messages
- All BSSMAP-LE general messages

The following BSSMAP messages defined in 3GPP TS 08.08 are applicable to the Lb interface to support signaling to a Type A LMU using an SDCCH:

- Cipher Mode Command (SMLC to BSC)
- Cipher Mode Complete (BSC to SMLC)
- Cipher Mode Reject (BSC to SMLC)
- Classmark Update (BSC to SMLC)
- Clear Command (SMLC to BSC)
- Clear Complete (BSC to SMLC)
- Clear Request (BSC to SMLC)
- Complete Layer 3 Information (BSC to SMLC)
- Confusion (BSC to SMLC)
- Handover Required (BSC to SMLC)
- Handover Required Reject (SMLC to BSC)
- Handover Performed (BSC to SMLC)
- Paging (SMLC to BSC)

The following additional BSSMAP messages defined in 3GPP TS 08.08 are applicable to the Lb interface to support signaling to a Type A LMU using a TCH:

- Assignment Request (SMLC to BSC)
- Assignment Complete (BSC to SMLC)
- Assignment Failure (BSC to SMLC)
- Block (bothway)
- Blocking Acknowledge (bothway)
- Unblock (bothway)
- Unblocking Ack. (bothway)
- Unequipped circuit (bothway)

The following DTAP messages defined in 3GPP TS 04.08 are applicable to the Lb interface to support signaling to a Type A LMU using an SDCCH:

- RR Paging Response

All MM Messages

The following additional CM level DTAP messages defined in 3GPP TS 04.08 are applicable to the Lb interface to support signaling to a Type A LMU using a TCH.

- Call Confirmed (LMU to SMLC)
- Connect (LMU to SMLC)
- Connect Acknowledge (SMLC to LMU)
- Setup (SMLC to LMU)
- Disconnect (bothway)
- Release (bothway)
- Release Complete (bothway)

6.2 MTP Functions

Except where defined otherwise in this specification, MTP requirements on the Lb interface for the BSC are the same as those defined for the A interface in 3GPP TS 08.06 for the BSC. MTP requirements on the Lb interface for the SMLC are the same as those defined for the A interface in 3GPP TS 08.06 for the MSC. STP functions are not required in the SMLC and a single signaling link set may be used between the BSC and SMLC. The BSC shall be homed to a single SMLC and shall only use the Lb signaling interface for signaling communication with the SMLC.

6.3 SCCP Functions

6.3.1 General

Except where defined otherwise in this specification, SCCP requirements on the Lb interface for the BSC are the same as those defined for the A interface in 3GPP TS 08.06 for the BSC. SCCP requirements on the Lb interface for the SMLC are the same as those defined for the A interface in 3GPP TS 08.06 for the MSC. Requirements concerning support of a type A LMU are the same as those in 3GPP TS 08.06 regarding support of a normal MS. In particular, usage of SCCP to transfer DTAP-LE messages between a type A LMU and SMLC are the same as those regarding transfer of other DTAP messages.

6.3.2 Modifications for Connectionless SCCP

Connectionless SCCP messages and procedures are used to transfer BSSMAP-LE Connectionless Information messages and those BSSMAP messages applicable to the Lb interface for which connectionless SCCP transfer is defined in 3GPP TS 08.08. Refer to 3GPP TS 03.71 for a description of the procedures in the SMLC and BSC. SCCP protocol class 1 shall be used when multiple BSSMAP-LE messages are transferred containing segments of a single fragmented LLP or SMLCPP message.

6.3.3 Modifications for Connection Oriented SCCP

Use of connection oriented SCCP messages and procedures on the Lb interfaces to support signaling access to a type A LMU using DTAP-LE, DTAP and BSSMAP messages is the same as that defined in 3GPP TS 08.06 on the A interface to support access to a normal MS.

To support positioning of a target MS, connection oriented SCCP messages and procedures using protocol class 2 shall be used to transfer BSSMAP-LE positioning messages and BSSMAP-LE Connection Oriented Information messages over the Lb interface. A separate dedicated SCCP connection shall be used to support positioning for each target MS. Connection establishment shall be instigated by the BSC when the positioning attempt commences. Connection release shall be instigated by either the BSC or SMLC when the positioning attempt has been completed or has failed.

Transfer of BSSMAP-LE messages using an SCCP connection to support positioning of a particular target MS is shown in the following figure. In particular, a BSSMAP-LE message shall be included in the data field of the SCCP CR and a BSSMAP-LE message may be included in the data field of an SCCP CC, CREF or RLSD message.

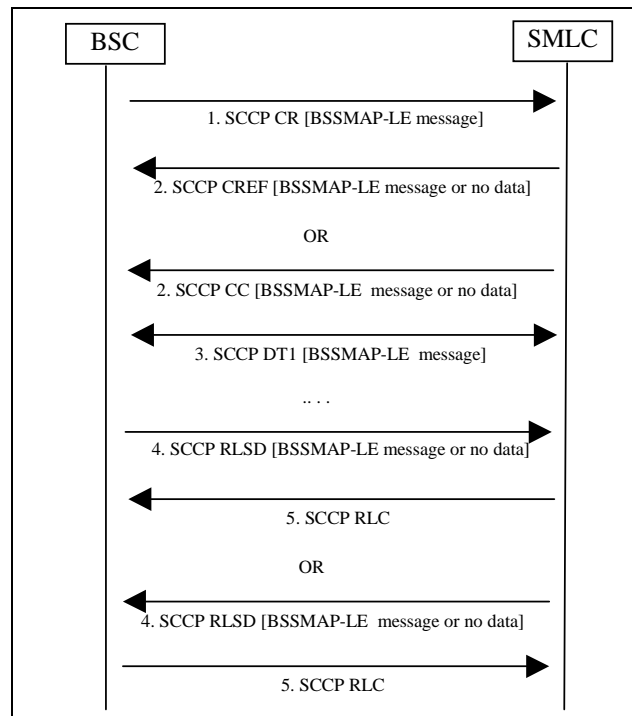


Figure 6.3.3/09.31: SCCP Connection Oriented Signaling on Lb Interface for Positioning

6.3.4 Contents of the SCCP Data Field

The contents of the SCCP data field are the same as that defined for the A interface in 3GPP TS 08.06 for MSC-BSC signaling. In particular, the same conventions are used to transfer and discriminate between any BSSAP and DTAP message contained within the SCCP data field. Since all BSSAP-LE messages applicable to the Lb interface use the same encoding as for the A interface, the conventions used to discriminate a BSSMAP message are applicable to any BSSMAP-LE message on the Lb interface, while the conventions for a DTAP message apply to any DTAP-LE message.

6.3.5 Abnormal Conditions

If a user-out-of-service information or signalling-point-inaccessible information is received by a BSC or SMLC, no new attempt to establish SCCP connections towards the affected point code shall be started until the corresponding user-in-service information or signalling-point-accessible information is received.

When a user-out-of-service information or signalling-point-inaccessible is received, an optional timer may be started. If the timer expires all the SCCP connections towards the affected point code shall be released. When the user-in-service or signalling-point-accessible is received, the timer is stopped.

If an SCCP connection is released, the optional timer expires or a connection refusal is received, any dependent BSSAP-LE procedure between the SMLC and BSC shall be terminated and, at a BSC, any associated SCCP connection or location service transaction to an MSC, or any associated signaling or circuit connection to an LMU, shall be released using appropriate signalling procedures.

7 Use of BSSAP-LE on the Ls Interface

7.1 Applicable Message Sets

The following BSSAP-LE messages are applicable to the Ls interface between an MSC and SMLC:

- All DTAP-LE messages
- All BSSMAP-LE positioning messages
- All BSSMAP-LE LMU control messages
- All BSSMAP-LE information messages
- All BSSMAP-LE general messages

7.2 MTP Functions

SS7 signaling on the Ls interface may be supported using 56 kbps or 64 kbps digital signaling channels. These may be supported within either E1 or T1 physical links.

For E1 links or where CCITT/ITU SS7 signaling is applicable, the MTP functions as specified in CCITT Recommendations Q.702, Q.703, Q.704 and Q.707 are applicable. For T1 links or where ANSI SS7 signaling is applicable, the MTP functions as specified in ANSI T1.111 are applicable. For the SMLC, the requirements in these recommendations for a signaling end point are applicable. For the MSC, the requirements in these recommendations for both a signaling end point and signaling transfer point (STP) are applicable. MSC support of STP functions is only required for situations in which the SMLC has no signaling links to an STP and needs to access other network entities to which there are no direct point-to-point signaling links.

Where an SMLC supports direct signaling links to one or more MSCs only and has no signaling links to an STP, certain exceptions and modifications to normal CCITT and ANSI requirements may be applied within a PLMN administration.

7.3 SCCP functions

7.3.1 General

For E1 links or where CCITT/ITU SS7 signaling is applicable, the SCCP functions as specified in either CCITT Blue Book Recommendations Q.711, Q.712, Q.713 and Q.714 or ITU White Book Recommendations Q.711, Q.712, Q.713 and Q.714 are applicable, as amended by the exceptions and modifications defined here. For T1 links or where ANSI SS7 signaling is applicable, the SCCP functions as specified in ANSI T1.112 are applicable, as amended by the exceptions and modifications defined here.

Several functions of the SCCP are not used on the Ls interface: error detection, receipt confirmation, flow control.

The segmenting/reassembling function may be used if the total message length exceeds the maximum allowed message length that can be carried by the MTP.

7.3.2 Allowed Exceptions to CCITT Recommendations Q.711-714

Only the following SCCP messages are applicable to the Ls interface:

- Connection Confirm (CC)
- Connection Request (CR)
- Connection Refused (CREF)
- Data Form 1 (DT1)

Inactivity Test (IT)

Released (RLSD)

Release Complete (RLC)

Subsystem Allowed (SSA)

Subsystem Prohibited (SSP)

Subsystem Status Test (SST)

Unitdata (UDT)

Unitdata Service (UDTS)

Support of only SCCP protocol classes 0, 1 and 2 is required. For protocol class 2, the "credit" parameter field and the "sequencing/segmenting" parameter fields are not used, but the parameters must still be included in the Inactivity Test (IT) message for syntax reasons. Negotiation of protocol class and flow control is not required for protocol class 2.

The SCCP called party address in a CR or UDT may contain only the subsystem number (SSN) or a signaling point code (SPC) plus SSN or a global title. Use of a global title is not required for SMLC to MSC signaling within the same PLMN. SSN values applicable to the Ls interface are defined in 3GPP TS 03.03.

For protocol class 2, support of only a single connection section is required. Use of multiple connection sections is a national concern.

7.3.3 Allowed Exceptions to ANSI T1.112

Only the following SCCP messages are applicable to the Ls interface:

Connection Confirm (CC)

Connection Request (CR)

Connection Refused (CREF)

Data Form 1 (DT1)

Inactivity Test (IT)

Released (RLSD)

Release Complete (RLC)

Subsystem Allowed (SSA)

Subsystem Prohibited (SSP)

Subsystem Status Test (SST)

Unitdata (UDT)

Unitdata Service (UDTS)

Support of only SCCP protocol classes 0, 1 and 2 is required. For protocol class 2, the "credit" parameter field and the "sequencing/segmenting" parameter fields are not used, but the parameters must still be included in the Inactivity Test (IT) message for syntax reasons. Negotiation of protocol class and flow control is not required for protocol class 2.

The SCCP called party address in a CR or UDT may contain only the subsystem number (SSN) or a signaling point code (SPC) plus SSN or a global title. Use of a global title is not required for SMLC to MSC signaling within the same PLMN. SSN values applicable to the Ls interface are defined in 3GPP TS 03.03.

For protocol class 2, support of only a single connection section is required. Use of multiple connection sections is a national concern.

7.3.4 Usage of Connectionless SCCP

Connectionless SCCP messages and procedures are used to transfer BSSMAP-LE Connectionless Information messages. Refer to 3GPP TS 03.71 for a description of the procedures in the SMLC and MSC. SCCP protocol class 1 shall be used when multiple BSSMAP-LE messages are transferred containing segments of a single fragmented LLP or SMLCPP message.

7.3.5 Usage of Connection Oriented SCCP

Connection oriented SCCP messages and procedures for SCCP protocol class 2 shall be used to transfer BSSMAP-LE positioning messages, BSSMAP-LE LMU control messages, BSSMAP-LE Connection Oriented Information messages and DTAP-LE messages. A separate dedicated SCCP connection shall be used to support either positioning for each target MS or signaling to each type A LMU. Connection establishment shall be instigated when the positioning attempt commences or when a signaling link to a type A LMU needs to be established. Connection release shall be instigated when the positioning attempt has been completed or has failed or when a signaling link to a type A LMU needs to be released. The MSC is normally expected to release the SCCP connection to the SMLC.

Transfer of BSSAP-LE messages within an SCCP connection is shown in the following figure. In particular, a BSSMAP-LE message shall be included in the data field of any SCCP CR and a BSSMAP-LE message may be included in the data fields of an SCCP CC, CREF or RLSD message.

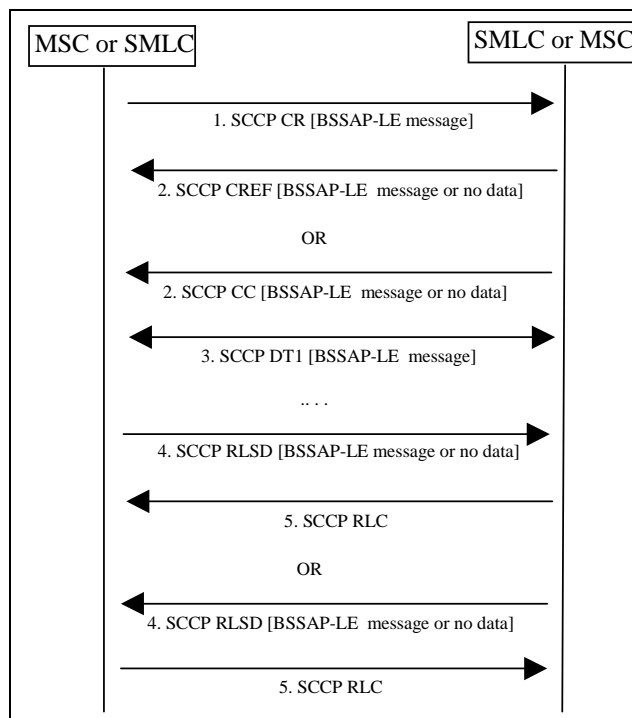


Figure 7.3.5-1/09.31: SCCP Connection Oriented Signaling on Ls Interface

7.3.6 Contents of the SCCP Data Field

The contents of the SCCP data field for BSSMAP-LE and DTAP-LE messages are shown in the following figures.

	8	7	6	5	4	3	2	1
Octet 1	0	0	0	0	0	0	0	D=0
Octet 2	Length indicator = n							
Octet 3 to Octet n+2	BSSMAP-LE Message Contents							

Figure 7.3.6-1/3GPP TS 09.31: SCCP Data Field for a BSSMAP-LE Message

	8	7	6	5	4	3	2	1
Octet 1	0	0	0	0	0	0	0	D=1
Octet 2	DLCI							
Octet 3	Length indicator = n							
Octet 4 to Octet n+3	DTAP-LE Message Contents							

Figure 7.3.6-2/3GPP TS 09.31: SCCP Data Field for a DTAP-LE Message

The Discrimination Indicator is coded in bit 1 of octet one and indicates the type of the BSSAP-LE message.

Discrmination Indicator	BSSAP-LE Message Type
0	BSSMAP-LE
1	DTAP-LE

The DLCI in octet 2 is applicable only to DTAP-LE messages and is coded as defined for the A interface in 3GPP TS 08.06 for DTAP. For signaling to a type A LMU using an SDCCH and SAPI=0, the value of the DLCI is 10000000.

The length indicator is coded in one octet, and is the binary representation of the number of octets of the subsequent BSSMAP-LE or DTAP-LE message parameter.

7.3.7 Content of DTAP-LE Messages

DTAP-LE messages transferred on the Ls interface are encoded as defined in 3GPP TS 04.71. In particular, in octet 1 of any DTAP-LE message, the Protocol discriminator shall indicate LCS and the transaction identifier (TI) shall indicate the transaction between the SMLC and type A LMU. The TI shall be assigned by the SMLC if the transaction is originated from the SMLC and by the LMU if the originator is the LMU. The MSC shall not change the value of the TI when transferring any DTAP-LE message from the SMLC to the LMU or from the LMU to the SMLC.

7.3.8 Abnormal Conditions

If a user-out-of-service information or signalling-point-inaccessible information is received by an MSC or SMLC, no new attempt to establish SCCP connections towards the affected point code shall be started until the corresponding user-in-service information or signalling-point-accessible information is received.

When a user-out-of-service information or signalling-point-inaccessible is received, an optional timer may be started. If the timer expires all the SCCP connections towards the affected point code shall be released. When the user-in-service or signalling-point-accessible is received, the timer is stopped.

If an SCCP connection is released, the optional timer expires or a connection refusal is received, any dependent BSSAP-LE procedure between the SMLC and MSC shall be terminated and, at an MSC, any associated SCCP connection or location service transaction to a BSC, or any associated signaling or circuit connection to an LMU, shall be released using appropriate signalling procedures.

8 Use of BSSAP-LE on the Lp Interface

8.1 Applicable Message Sets

The following BSSAP-LE messages are applicable to the Lp interface between an SMLC and a peer SMLC.

BSSMAP-LE Connectionless Information message

8.2 MTP Functions

SS7 signaling on the Lp interface may be supported using 56 kbps or 64 kbps digital signaling channels. These may be supported within either E1 or T1 physical links.

Two SMLCs may be connected by direct point-to-point SS7 signaling links or links may be employed via intermediate STPs. Alternatively, signaling transfer between two SMLCs may be supported via intermediate BSCs and/or MSCs using the Lb and/or Ls interfaces. Signaling requirements to support message transfer on the Lp interface via an intermediate Lb or Ls interface are the same as those defined elsewhere in this specification for these interfaces. This section defines the requirements applicable to direct SMLC-SMLC SS7 links and SS7 links from an SMLC to an STP.

For E1 links or where CCITT/ITU SS7 signaling is applicable, the MTP functions as specified in CCITT Recommendations Q.702, Q.703, Q.704 and Q.707 are applicable. For T1 links or where ANSI SS7 signaling is applicable, the MTP functions as specified in ANSI T1.111 are applicable. Only the requirements in these recommendations for a signaling end point are applicable.

Where an SMLC has no signaling links to an STP, certain exceptions and modifications to normal CCITT and ANSI requirements may be applied within a PLMN administration.

8.3 SCCP functions

8.3.1 General

For E1 links or where CCITT/ITU SS7 signaling is applicable, the SCCP functions as specified in either CCITT Blue Book Recommendations Q.711, Q.712, Q.713 and Q.714 or ITU White Book Recommendations Q.711, Q.712, Q.713 and Q.714 are applicable, as amended by the exceptions and modifications defined here. For T1 links or where ANSI SS7 signaling is applicable, the MTP functions as specified in ANSI T1.112 are applicable, as amended by the exceptions and modifications defined here.

8.3.2 Allowed Exceptions to CCITT Recommendations Q.711-714

Only the following SCCP messages are applicable to the Lp interface:

- Inactivity Test (IT)
- Subsystem Allowed (SSA)
- Subsystem Prohibited (SSP)
- Subsystem Status Test (SST)
- Unitdata (UDT)
- Unitdata Service (UDTS)

Support of only SCCP protocol classes 0 and 1 is required.

The SCCP called party address in a UDT may contain only the subsystem number (SSN) or a signaling point code (SPC) plus SSN or a global title. Use of a global title is not required for SMLC to SMLC signaling within the same PLMN. SSN values applicable to the Lp interface are defined in 3GPP TS 03.03.

8.3.3 Allowed Exceptions to ANSI T1.112

Only the following SCCP messages are applicable to the Lp interface:

- Inactivity Test (IT)
- Subsystem Allowed (SSA)
- Subsystem Prohibited (SSP)
- Subsystem Status Test (SST)

Unitdata (UDT)

Unitdata Service (UDTS)

Support of only SCCP protocol classes 0 and 1 is required.

The SCCP called party address in a UDT may contain only the subsystem number (SSN) or a signaling point code (SPC) plus SSN or a global title. Use of a global title is not required for SMLC to SMLC signaling within the same PLMN. SSN values applicable to the Lp interface are defined in 3GPP TS 03.03.

8.3.4 Usage of Connectionless SCCP

Connectionless SCCP messages and procedures shall be used to transfer BSSMAP-LE Connectionless Information messages. Refer to 3GPP TS 03.71 for a description of the procedures in the SMLC. SCCP protocol class 1 shall be used when multiple BSSMAP-LE messages are sent containing segments of a single fragmented SMLCPP message.

8.3.5 Usage of Connection Oriented SCCP

Connection oriented SCCP messages and procedures are not applicable to the Lp interface.

8.3.6 Contents of the SCCP Data Field

The contents of the SCCP data field is shown in the following figure.

	8	7	6	5	4	3	2	1
Octet 1	0	0	0	0	0	0	0	D=0
Octet 2	Length indicator = n							
Octet 3 to Octet n+2	BSSMAP-LE Message Contents							

Figure 8.3.6-1/3GPP TS 09.31: SCCP Data Field for a BSSMAP-LE Message

The Discrimination Indicator is coded in bit 1 of octet one and indicates the type of the BSSAP-LE message.

Discrmination Indicator	BSSAP-LE Message Type
0	BSSMAP-LE

The length indicator is coded in one octet, and is the binary representation of the number of octets of the subsequent BSSMAP-LE message parameter.

9 Message Functional Definitions and Contents

For each message there is, in this clause, a table listing the signalling elements in their order of appearance in the transmitted message.

9.1 BSSMAP-LE PERFORM LOCATION REQUEST message

This message is sent to request a location estimate for a target MS and contains sufficient information to enable location according to the required QoS using any positioning method supported by the PLMN and, where necessary, MS. The message is also used to request LCS assistance data transfer to an MS or request a deciphering keys for LCS broadcast assistance data. The message can be sent from the BSC to the SMLC and from the MSC to the SMLC.

Table 9.1: BSSMAP-LE PERFORM LOCATION REQUEST message content

Information element	Type / Reference	Presence	Format	Length in octets
Message type	Message Type	M	V	1
Location Type	Location Type	M	TLV	3-4
Cell Identifier	Cell Identifier	M	TLV	3-10
Classmark Information Type 3	Classmark Information Type 3	O	TLV	2-n
LCS Client Type	LCS Client Type	C	TLV	3
Chosen Channel	Chosen Channel	O	TLV	2-n
LCS Priority	LCS Priority	O	TLV	3
LCS QoS	LCS QoS	O	TLV	6
GPS Assistance Data	GPS Assistance Data	O	TLV	3-n
BSSLAP APDU	APDU	O	TLV	2-n

9.1.1 Location Type

This parameter defines the type of location information being requested.

9.1.2 Cell Identifier

This parameter gives the current cell location of the target MS. The format shall either be the cell global identification or the LAC plus CI form.

9.1.3 Classmark Information Type 3

This parameter indicates the positioning methods supported by the MS as obtained from the MS Classmark 3 received earlier from the target MS.

9.1.4 LCS Client Type

This parameter defines the type of the originating LCS Client. It shall be included if the Location Type indicates a request for a location estimate and may be included in other cases to assist an SMLC to appropriately prioritize a location request.

9.1.5 Chosen Channel

This parameter defines the type of radio channel currently assigned to the target MS.

9.1.6 LCS Priority

This parameter defines the priority of the location request.

9.1.6a LCS QoS

This parameter provides the required Quality of Service for the LCS Request. Quality of Service may include horizontal accuracy, vertical accuracy and allowed response time.

9.1.7 GPS Assistance Data

This parameter identifies the specific GPS assistance data that may be requested.

9.1.8 BSSLAP APDU

This parameter provides additional measurements (e.g. timing advance) for the target MS from the BSC. The measurements are contained inside a BSSLAP APDU.

9.2 BSSMAP-LE PERFORM LOCATION RESPONSE message

This message is sent in response to a BSSMAP-LE Perform Location Request to return a successful location estimate for a target MS or to indicate some failure in obtaining this. The message is also sent in response to a BSSMAP-LE Perform Location Request to return deciphering keys or an indication that LCS assistance data has been successfully delivered to an MS. The message can be sent from the SMLC to the BSC and from the SMLC to the MSC.

Table 9.2: BSSMAP-LE PERFORM LOCATION RESPONSE message content

Information element	Type / Reference	Presence	Format	Length in octets
Message type	Message Type	M	V	1
Location Estimate	Geographic Location	C	TLV	2-22
Positioning Data	Positioning Data	O	TLV	2-n
Deciphering Keys	Deciphering Keys	O	TLV	17
LCS Cause	LCS Cause	O	TLV	3

9.2.1 Location Estimate

This parameter provides a location estimate for the target MS in the case of a successful location attempt.

9.2.2 Positioning Data

This parameter provides additional information for the positioning attempt from the SMLC.

9.2.3 Deciphering Keys

This parameter provides two deciphering keys that can be used to decode LCS broadcast assistance data by the MS. The SMLC shall provide the current deciphering key for the MS's present location. The SMLC shall also provide the next deciphering key applicable after the current deciphering key.

9.2.4 LCS Cause

The LCS Cause is included if and only if a requested location estimate was not successfully obtained (e.g. location estimate not available), requested deciphering keys were not successfully returned or requested LCS assistance data was not successfully transferred to the MS. The parameter provides the reason for the failure. If the LCS Cause is included, the Location Estimate and Deciphering Key shall not be included.

9.3 BSSMAP-LE PERFORM LOCATION ABORT message

This message is sent by the instigator of a location request to abort the positioning attempt or the request for assistance data or deciphering keys. This message can be sent from the MSC to the SMLC and from the BSC to the SMLC.

Table 9.3: BSSMAP-LE PERFORM LOCATION ABORT message content

Information element	Type / Reference	Presence	Format	Length in octets
Message type	Message Type	M	V	1
LCS Cause	LCS Cause	M	TLV	3

9.3.1 LCS Cause

The LCS Cause provides the reason for the aborting the location attempt.

9.4 BSSMAP-LE LMU CONNECTION REQUEST message

This message is sent to request the establishment of a signaling connection between an LMU and an SMLC. The message can be sent from an SMLC to an MSC and from an MSC to an SMLC.

Table 9.4: BSSMAP-LE LMU CONNECTION REQUEST message content

Information element	Type / Reference	Presence	Format	Length in octets
Message type	Message Type	M	V	1
IMSI	IMSI	M	TLV	3-10
Sender Address	Signaling Point Code	O	TLV	2-n
Security	Security	O	TLV	2-n
Call Number	ISDN Address	O	TLV	3-n

9.4.1 IMSI

This parameter identifies the LMU using its E.212 IMSI.

9.4.2 Sender Address

This parameter provides the SS7 signaling point code for the sender of the message. The parameter is mandatory for message transfer between an MSC and SMLC on the Ls interface.

9.4.3 Security

This parameter indicates if authentication or ciphering are required for the LMU. This parameter may be included for message transfer from an SMLC. If the parameter is absent, authentication and ciphering shall be assumed not to be required.

9.4.4 Call Number

This parameter may be included in an LMU connection request sent by an MSC to enable the SMLC to subsequently establish a TCH to the LMU.

9.5 BSSMAP-LE LMU CONNECTION ACCEPT message

This message is sent in response to a BSSMAP-LE LMU Connection Request message to accept the establishment of a signaling connection between an LMU and an SMLC. The message can be sent from an SMLC to an MSC and from an MSC to an SMLC.

Table 9.5: BSSMAP-LE LMU CONNECTION ACCEPT message content

Information element	Type / Reference	Presence	Format	Length in octets
Message type	Message Type	M	V	1
Security	Security	O	TLV	3
Call Number	ISDN Address	O	TLV	3-n

9.5.1 Security

This parameter indicates if authentication or ciphering are required for the LMU. This parameter may be included for message transfer from an SMLC. If the parameter is absent, authentication and ciphering shall be assumed not to be required.

9.5.2 Call Number

This parameter may be included in an LMU connection accept sent by an MSC to enable the SMLC to subsequently establish a TCH to the LMU.

9.6 BSSMAP-LE LMU CONNECTION REJECT message

This message is sent in response to a BSSMAP-LE LMU Connection Request message to reject the establishment of a signaling connection between an LMU and an SMLC. The message can be sent from an SMLC to an MSC and from an MSC to an SMLC.

Table 9.6: BSSMAP-LE LMU CONNECTION REJECT message content

Information element	Type / Reference	Presence	Format	Length in octets
Message type	Message Type	M	V	1
Reject Cause	LMU Cause	M	TLV	3

9.6.1 Reject Cause

This parameter provides the reason for the rejection of an LMU connection.

9.7 BSSMAP-LE LMU CONNECTION RELEASE message

This message is sent to release a signaling connection between an LMU and an SMLC. The message can be sent from an SMLC to an MSC and from an MSC to an SMLC.

Table 9.7: BSSMAP-LE LMU CONNECTION RELEASE message content

Information element	Type / Reference	Presence	Format	Length in octets
Message type	Message Type	M	V	1
Release Cause	LMU Cause	M	TLV	3

9.7.1 Release Cause

This parameter provides the reason for the release of an LMU connection.

9.8 BSSMAP-LE CONNECTION ORIENTED INFORMATION message

This message is sent in association with an existing signaling connection between an SMLC and another entity to transfer information between the SMLC and other entity belonging to a higher level protocol. The message can be sent from an SMLC to an MSC, from an MSC to an SMLC, from a BSC to an SMLC and from an SMLC to a BSC.

Table 9.8: BSSMAP-LE CONNECTION ORIENTED INFORMATION message content

Information element	Type / Reference	Presence	Format	Length in octets
Message type	Message Type	M	V	1
BSSLAP APDU	APDU	M	TLV	3-n
Segmentation	Segmentation	C	TLV	3

9.8.1 BSSLAP APDU

This parameter contains a BSSLAP message.

9.8.2 Segmentation

This parameter contains segmentation information for a segmented APDU. The parameter shall not include message information. The parameter shall be included if and only if the BSSLAP APDU is segmented.

9.9 BSSMAP-LE CONNECTIONLESS INFORMATION message

This message conveys signaling information associated with a higher protocol level between an SMLC and another entity when there is no existing signaling connection association. The message can be sent from an SMLC to an MSC, from an MSC to an SMLC, from a BSC to an SMLC, from an SMLC to a BSC and from an SMLC to another SMLC.

Table 9.9: BSSMAP-LE CONNECTIONLESS INFORMATION message content

Information element	Type / Reference	Presence	Format	Length in octets
Message type	Message Type	M	V	1
Source Identity	Network Element Identity	M	TLV	3-n
Destination Identity	Network Element Identity	M	TLV	3-n
APDU	APDU	O	TLV	3-n
Segmentation	Segmentation	C	TLV	5
Return Error Request	Return Error Request	O	TLV	2
Return Error Cause	Return Error Cause	O	TLV	3

9.9.1 Source Identity

This parameter identifies the original source of the message. The original source can either be an SMLC or a Type B LMU. The source is identified by association with either a location area or a cell site.

9.9.2 Destination Identity

This parameter identifies the final destination of the message. The final destination can either be an SMLC or a Type B LMU. The destination is identified by association with either a location area or a cell site.

9.9.3 APDU

This parameter contains an embedded APDU. For information transfer between an SMLC and Type B LMU this shall be an LLP APDU. For information transfer between two peer SMLCs, this shall be an SMLCPP APDU.

9.9.4 Segmentation

This parameter contains segmentation and message information for a segmented APDU. The parameter shall be included if and only if a segmented APDU is present.

9.9.5 Return Error Request

This parameter may be included to request an error response if BSSMAP-LE message cannot be delivered successfully to its final destination. This parameter shall not be included if the Return Error cause is present.

9.9.6 Return Error Cause

This parameter indicates an error response for a BSSMAP-LE connectionless information message that could not be delivered to its final destination. The APDU should be present and the same as the APDU in the original undelivered message. The source and destination identities shall be included and the same as the destination and source identities, respectively, in the original undelivered message.

9.10 BSSMAP-LE RESET message

This message is sent to indicate a failure in the sending entity with loss of memory of LMU connections and location service transactions that were established or were being established. The message may be sent from an SMLC to an MSC or BSC and from an MSC or BSC to an SMLC.

This message is sent as a connectionless SCCP message.

Table 9.10: BSSMAP-LE RESET message content

Information element	Type / Reference	Presence	Format	Length in octets
Message type	Message Type	M	V	1
Cause	Cause	M	TLV	3-4

9.11 BSSMAP-LE RESET ACKNOWLEDGE message

This message is sent in response to a Reset message to indicate that references and resources associated with LMU connections and location service transactions towards the entity sending the Reset have been released. The message may be sent from an SMLC to an MSC or BSC and from an MSC or BSC to an SMLC.

This message is sent as a connectionless SCCP message.

Table 9.11: BSSMAP-LE RESET ACKNOWLEDGE message content

Information element	Type / Reference	Presence	Format	Length in octets
Message type	Message Type	M	V	1

10 Message format and information element coding

This clause specifies the coding of the Information Elements used by the BSSAP-LE protocol. The spare bits in the coding of an IE shall be set to zero by the sender and shall be ignored by the receiver.

All unassigned codes (whether omitted or explicitly *Unassigned* in the text) shall be treated as unknown (see clause 'Error Handling and Future Compatibility').

The following conventions are assumed for the sequence of transmission of bits and bytes:

- Each bit position is marked as 1 to 8. Bit 1 is the least significant bit and is transmitted first.
- In an element octets are identified by number, octet 1 is transmitted first, then octet 2 etc.

When a field extends over more than one octet, the order of bit values progressively decreases as the octet number increases. The least significant bit of the field is represented by the lowest numbered bit of the highest numbered octet of the field.

- For variable length elements a length indicator is included, this indicates the number of octets following in the element.
- All fields within Information Elements are mandatory unless otherwise specified. The Information Element Identifier shall always be included.

All spare bits are set to 0.

For any information element of format TLV, the length indicator octet, as in 3GPP TS 08.08, defines the number of octets in the information element that follow the length indicator octet.

10.1 Message type

Message type uniquely identifies the message being sent. It is a single octet element, mandatory in all messages.

Table 10.1/3GPP TS 09.31: Message type information element

Category	8 7 6 5 4 3 2 1	Message Type
POSITIONING MESSAGES	0 0 0 0 0 0 0 0	Reserved.
	0 0 1 0 1 0 1 1	BSSMAP-LE PERFORM LOCATION REQUEST
	0 0 1 0 1 1 0 1	BSSMAP-LE PERFORM LOCATION RESPONSE
	0 0 1 0 1 1 1 0	BSSMAP-LE PERFORM LOCATION ABORT
LMU CONTROL MESSAGES	0 0 0 0 0 0 0 1	BSSMAP-LE LMU CONNECTION REQUEST
	0 0 0 0 0 0 1 0	BSSMAP-LE LMU CONNECTION ACCEPT
	0 0 0 0 0 0 1 1	BSSMAP-LE LMU CONNECTION REJECT
	0 0 0 0 0 1 0 0	BSSMAP-LE LMU CONNECTION RELEASE
INFORMATION MESSAGES	0 0 1 0 1 0 1 0	BSSMAP-LE CONNECTION ORIENTED INFORMATION
	0 0 1 1 1 0 1 0	BSSMAP-LE CONNECTIONLESS INFORMATION
GENERAL MESSAGES	0 0 1 1 0 0 0 0	RESET
	0 0 1 1 0 0 0 1	RESET ACKNOWLEDGE

10.2 Information Element Identifiers

The next list shows the coding of the Information Element Identifiers used in the present document.

Table 10.2/3GPP TS 09.31: Information Element Identifier coding

8 7 6 5 4 3 2 1	Information element	Reference
0 0 1 1 1 1 1 0	LCS QoS	10.16
0 1 0 0 0 0 1 1	LCS Priority	10.15
0 1 0 0 0 1 0 0	Location Type	10.18
0 1 0 0 0 1 0 1	Geographic Location	10.9
0 1 0 0 0 1 1 0	Positioning Data	10.20
0 1 0 0 0 1 1 1	LCS Cause	10.13
0 1 0 0 1 0 0 0	LCS Client Type	10.14
0 1 0 0 1 0 0 1	APDU	10.3
0 1 0 0 1 0 1 0	Network Element Identity	10.19
0 1 0 0 1 0 1 1	GPS Assistance Data	10.10
0 1 0 0 1 1 0 0	Deciphering Keys	10.8
0 1 0 0 1 1 0 1	Return Error Request	10.21
0 1 0 0 1 1 1 0	Return Error Cause	10.22
0 1 0 0 1 1 1 1	Segmentation	10.24
0 0 0 1 0 0 1 1	Classmark Information Type 3	10.7
0 0 0 0 0 1 0 0	Cause	10.4
0 0 0 0 0 1 0 1	Cell Identifier	10.5
0 0 1 0 0 0 0 1	Chosen Channel	10.6
0 0 0 0 0 0 0 0	IMSI	10.11
0 0 0 0 0 0 0 1	ISDN Address	10.12
0 0 0 0 0 0 1 0	Security	10.23
0 0 0 0 0 0 1 1	Signaling Point Code	10.25
0 0 0 0 0 1 0 0	LMU Cause	10.17

10.3 APDU

This is a variable length information element that conveys an embedded message or message segment associated with a higher level protocol.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2-3	Length indicator							
Octet 4	Spare	Protocol ID						
Octet 5 to Octet n	The rest of the information element contains a message or message segment whose content and encoding are defined according to the protocol ID.							

Figure 10.3.1/3GPP TS 09.31: APDU IE

Length Indicator (octets 2-3).

The most significant bit is bit 8 of Octet 2, and the least significant bit is bit 1 in Octet 3. The length indicator defines the total number of octets after length indicator.

Protocol ID (bits 7-1 of octet 4).

0000000 reserved
 0000001 BSSLAP
 0000010 LLP
 0000011 SMLCPP

Embedded Message (octets 5-n)

BSSLAP	the embedded message is as defined in 3GPP TS 08.71
LLP	the embedded message contains a Facility Information Element as defined in 3GPP TS 04.71 excluding the Facility IEI and length of Facility IEI octets defined in 3GPP TS 04.71.
SMLCPP	the embedded message is as defined in 3GPP TS 08.31

10.4 Cause

This is a variable length information element indicating the reason for sending a Reset message.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	The rest of the information element is coded as the value part of the Cause IE defined in 3GPP TS 08.08.							

Figure 10.4.1/3GPP TS 09.31: Cause IE

10.5 Cell Identifier

This is a variable length information element identifying a particular cell.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	The rest of the information element is coded as the value part of the Cell Identifier IE defined in 3GPP TS 08.08.							

Figure 10.5.1/3GPP TS 09.31: Cell Identifier IE

10.6 Chosen Channel

This information element identifies a type of radio interface channel.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	The rest of the information element is coded as the value part of the Chosen Channel IE defined in 3GPP TS 08.08.							

Figure 10.6.1/3GPP TS 09.31: Chosen Channel IE

10.7 Classmark Information Type 3

This information element contains classmark information for a target MS obtained from the MS Classmark 3 defined in 3GPP TS 04.08.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	The rest of the information element is coded as the value part of the Classmark Information Type 3 IE defined in 3GPP TS 08.08.							

Figure 10.7.1/3GPP TS 09.31: Classmark Information Type 3 IE

10.8 Deciphering Keys

This information element defines the deciphering keys which should be used by the MS to decode LCS broadcast assistance data. The parameter includes following data fields. All fields shall be included:

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	spare							CIPHERING KEY FLAG
Octet 4	Current Deciphering Key Value							
...								
Octet 10	Next Deciphering Key Value							
Octet 11	Next Deciphering Key Value							
...								
Octet 17	Next Deciphering Key Value							

Figure 10.8.1/3GPP TS 09.31: Deciphering Keys IE

Ciphering Key Flag (octet 3)

This flag indicates the current Ciphering Key Flag used in the LCS assistance data broadcast messages in the location area.

Current Deciphering Key Value (octet 4 – 10)

Current Deciphering Key contains the 56 bit deciphering key that is currently in use in location area for deciphering the LCS assistance data broadcast messages.

Next Deciphering Key (octet 11 – 17)

Next Deciphering Key contains the 56 bit deciphering key that will be used next in location area for deciphering the LCS assistance data broadcast messages.

10.9 Geographic Location

This is a variable length information element providing an estimate of a geographic location.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3 to Octet n	The rest of the information element contains an octet sequence identical to that for the Ext-GeographicalInformation data type in 3GPP TS 09.02.							

Figure 10.9.1/3GPP TS 09.31: Geographic Location IE

10.10 GPS Assistance Data

This is a variable length information element identifying the GPS assistance data requested for an MS.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	H	G	F	E	D	C	B	A
Octet 4	P	O	N	M	L	K	J	I
Octet 5 to Octet 8+2n	Satellite related data							

Figure 10.10.1/3GPP TS 09.31: GPS Assistance Data IE

Octet 3

bit A Almanac

0 : Almanac is not requested

1 : Almanac is requested

bit B UTC Model

0 : UTC Model is not requested

1 : UTC Model is requested

bit C Ionospheric Model

0 : Ionospheric Model is not requested

1 : Ionospheric Model is requested

bit D Navigation Model

0 : Navigation Model is not requested – octets 5 to 8+2n are not present

1 : Navigation Model is requested – octets 5 to 8+2n are present

bit E DGPS Corrections

0 : DGPS Corrections are not requested

1 : DGPS Corrections are requested

bit F Reference Location

0 : Reference Location is not requested

1 : Reference Location is requested

bit G Reference Time

0 : Reference Time is not requested

1 : Reference Time is requested

bit H Acquisition Assistance

0 : Acquisition Assistance is not requested

1 : Acquisition Assistance is requested

bit I Real-Time Integrity

0 : Real-Time Integrity is not requested

1 : Real-Time Integrity is requested

bits J through P are Spare bits

At least one of bits A, B, C, D, E, F, G, H or I, shall be set to the value "1".

	8	7	6	5	4	3	2	1
Octet 5	GPS Week		Spare					
Octet 6	GPS Week							
	NSAT							
	Spare							
Octet 7	GPS_Toe							
Octet 8	NSAT				T-Toe limit			
Octet 9	spare		SatID 1					
Octet 10	IODE 1							
...								
Octet 7+2n	spare		SatID n					
Octet 8+2n	IODE n							

Figure 10.10.2/3GPP TS 09.31: Coding of Satellite Related Data

GPS Week (bits 7-8 octet 5 and octet 6)

This field contains a 10 bit binary representation of the GPS Week of the assistance currently held by the MS. The most significant bit of the GPS Week is bit 8 in octet 5 and the least significant bit is bit 1 in octet 6.

GPS_Toe (octet 7)

This field contains a binary representation of the GPS time of ephemeris in hours of the newest ephemeris set contained in handset memory (range 0-167).

NSAT (octet 8, bits 5-8)

This field contains a binary representation of the number of satellites to be considered for the current GPS assistance request. If the MS has no ephemeris data, this field shall be set to zero. If the MS has ephemeris data whose age exceeds the T-Toe limit, this field may be set to zero. If the SMLC receives a zero value for this field, it shall ignore the GPS Week and GPS_Toe fields and assume that the MS has no ephemeris data.

T-Toe limit (octet 8, bits 1-4)

This field contains a binary representation of the ephemeris age tolerance of the MS to the network in hours (range 0-10).

SatID x (x = 1,2, ... n) (octet 7 + 2x, bits 1-6)

This field is present only if NSAT exceeds zero and contains a binary representation of the identity of a satellite for which the assistance request is applicable. The number of satellite fields is indicated in the field NSAT.

IODE x (x = 1,2, ... n) (octet 8 + 2x)

This field is present only if NSAT exceeds zero and contains a binary representation of the Issue of Data Ephemeris held in the MS, which identifies the sequence number for the satellite x (x = 1, 2, ..., n). The SMLC shall derive the issue date and time for the IODE of each satellite x from the GPS Week and GPS_Toe fields (e.g. when a particular IODE value for a satellite x was issued more than once within the period of T-Toe limit).

10.11 IMSI

The IMSI is of variable length and is coded as a sequence of BCD digits, compressed two into each octet. This is a variable length element, and includes a length indicator. The IMSI is defined in 3GPP TS 03.03. It shall not exceed 15 digits (see 3GPP TS 03.03).

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	IMSI digit 1				odd/ even	0	0	0
Octet 4	IMSI digit 3				IMSI digit 2			
Octet 4+x	IMSI digit i+1				IMSI digit i			

Figure 10.11.1/3GPP TS 09.31: IMSI IE

Where $x = (i-2)/2$ and i is always even

* The value of the odd/even bit (bit 4 in octet 3) indicates:

0 Even number of IMSI digits

1 Odd number of IMSI digits

If the number of IMSI digits is even then bits 5 to 8 of the last octet shall be filled with an end mark coded as 1111.

10.12 ISDN Address

This information element contains an ISDN address.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	The rest of the information element contains an octet string coded the same as the ISDN-AddressString common data type defined in 3GPP TS 09.02							

Figure 10.12.1/3GPP TS 09.31: ISDN Address IE

10.13 LCS Cause

The LCS Cause parameter is of variable length IE and provides the reason for an unsuccessful location request.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	Cause value							
Octet 4	Diagnostic value (note 1)							

NOTE 1: The inclusion of this octet depends on the cause value.

Figure 10.13.1/3GPP TS 09.31: LCS Cause IE

Table 10.13.1/3GPP TS 09.31: Cause value

LCS Cause value (octet 3)	
Bits	
8 7 6 5 4 3 2 1	
0 0 0 0 0 0 0 0	Unspecified
0 0 0 0 0 0 0 1	System Failure
0 0 0 0 0 0 1 0	Protocol Error
0 0 0 0 0 0 1 1	Data missing in position request
0 0 0 0 0 1 0 0	Unexpected data value in position request
0 0 0 0 0 1 0 1	Position method failure
0 0 0 0 0 1 1 0	Target MS Unreachable
0 0 0 0 0 1 1 1	Location request aborted
0 0 0 0 1 0 0 0	Facility not supported
0 0 0 0 1 0 0 1	Inter-BSC Handover Ongoing
0 0 0 0 1 0 1 0	Intra-BSC Handover Complete
0 0 0 0 1 0 1 1	Congestion
0 0 0 0 1 1 0 0	
	to <i>unspecified</i> in this version of the protocol
1 1 1 1 1 1 1 1	

Diagnostic value (octet 4):

this octet may be included if the cause value indicates "position method failure", the binary encoding of this octet shall encode the same set of values as defined for the PositionMethodFailure-Diagnostic in 3GPP TS 09.02. Values outside those defined in 3GPP TS 09.02 shall be ignored by a receiver.

10.14 LCS Client Type

This information element identifies the type of LCS Client.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	Client Category				Client Subtype			

Figure 10.14.1/3GPP TS 09.31: LCS Client Type IE

The client category (bits 8-5 of octet 3) and the client subtype (bits 4-1 of octet 3) are coded as follows.

Client Category	Client Subtype	Explanation
0000	0000 all values	Value Added Client unspecified reserved
0010	0000 0001 0010 0011 0100 other values	PLMN operator unspecified broadcast service O&M anonymous statistics Target MS service support (note 1) reserved note 1: includes a CAMEL phase 3 LCS client
0011	0000 other values	Emergency services unspecified reserved
0100	0000 other values	Lawful Intercept services unspecified reserved
0101 – 1111	all values	reserved

10.15 LCS Priority

This information element defines the priority level of a location request.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	This octet is coded as the LCS-Priority octet in 3GPP TS 09.02.							

Figure 10.15.1/3GPP TS 09.31: LCS Priority IE

10.16 LCS QoS

This information element defines the Quality of Service for a location request.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	spare							VERT
Octet 4	HA	Horizontal Accuracy						
Octet 5	VA	Vertical Accuracy						
Octet 6	RT		spare					

Figure 10.16.1/3GPP TS 09.31: LCS QoS IE

Octet 3

- VERT = vertical coordinate indicator
 0 : vertical coordinate not requested
 1 : vertical coordinate is requested

Octet 4

- bit 8 HA = horizontal accuracy indicator
 0 : Horizontal Accuracy is not specified
 1 : Horizontal Accuracy is specified
- bits 7-1 Horizontal Accuracy :
 spare (set all zeroes) if HA=0
 set to 7 bit uncertainty code in 3GPP TS 03.32 if HA=1

Octet 5 – applicable only if VERT = 1

- bit 8 VA = vertical accuracy indicator
 0 : Vertical Accuracy is not specified
 1 : Vertical Accuracy is specified
- bits 7-1 Vertical Accuracy :
 spare (set all zeroes) if VA=0
 set to 7 bit uncertainty altitude code in 3GPP TS 03.32 if VA=1

Octet 6

- bits 8-7 RT = response time category
 00 : Response Time is not specified
 01 : Low Delay
 10 : Delay Tolerant
 11 : reserved
- bits 6-1 spare

10.17 LMU Cause

The LMU Cause parameter provides the reason for the release or rejection of an LMU signaling connection between an MSC and SMLC.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	Cause value							

Figure 10.17.1/3GPP TS 09.31: LMU Cause IE

Table 10.17.1/3GPP TS 09.31: Cause value

Cause value (octet 3)	
Bits	
8	7 6 5 4 3 2 1
00000000	Unspecified
00000001	Normal Release
00000010	System Failure
00000011	Protocol Error
00000100	Missing Data
00000101	Unexpected Data
00000110	Congestion
00000111	Loss of radio channel to LMU
00001000	Release by LMU
00001001	Unknown LMU
00001010	LMU signaling error
00001011	LMU not authenticated
00001100	No response from LMU
00001101	LMU in erroneous state
00001110	
to	<i>unspecified</i> in this version of the protocol
11111111	

10.18 Location Type

This is a variable length information element defining the type of location information being requested.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	Location Information							
Octet 4	Positioning Method							

Figure 10.18.1/3GPP TS 09.31: Location Type IE

Coding of location information (octet 3):

- 00000000 current geographic location
- 00000001 location assistance information for the target MS
- 00000010 deciphering keys for broadcast assistance data for the target MS
- all other values are reserved

Positioning Method (octet 4)

This octet shall be included if the location information in octet 3 indicates "location assistance information for the target MS" or "deciphering keys for broadcast assistance data for the target MS" and shall be omitted otherwise.

00000000 reserved
 00000001 Mobile Assisted E-OTD
 00000010 Mobile Based E-OTD
 00000011 Assisted GPS
 all other values are reserved

10.19 Network Element Identity

This is a variable length information element identifying a network element, by association with either a designated cell site or a designated location area.

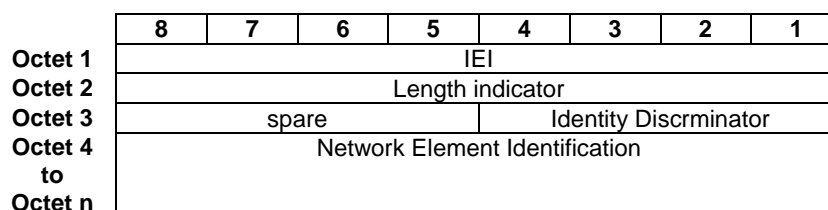


Figure 10.19.1/3GPP TS 09.31: Network Element Identity IE

Identity Discriminator (bits 4-1 of octet 3)

- 0000 Identification using the MCC + MNC + LAC + CI as defined in 3GPP TS 03.03
- 0001 Identification using LAC + CI as defined in 3GPP TS 03.03
- 0100 Identification using the MCC + MNC + LAC as defined in 3GPP TS 03.03
- 0101 Identification using the LAC as defined in 3GPP TS 03.03

All other values are reserved.




Figure 10.19.2/3GPP TS 09.31: Coding of Network Element Identification using the MCC+MNC+LAC+CI

Octets 4 to 10 are coded as the Cell Identification of the Cell Identifier IE for Cell identification discriminator = 0000 defined in 3GPP TS 08.08.




Figure 10.19.3/3GPP TS 09.31: Coding of Network Element Identification using the LAC + CI

Octets 4 to 7 are coded as the Cell Identification of the Cell Identifier IE for Cell identification discriminator = 0001 defined in 3GPP TS 08.08.

	8	7	6	5	4	3	2	1
Octet 4 to Octet 6 Octet 7 to Octet 8	MCC+ MNC							
	LAC							

Figure 10.19.4/3GPP TS 09.31: Coding of Network Element Identification using the MCC + MNC + LAC

Octets 4 to 8 are coded as the corresponding octets in the Cell Identification of the Cell Identifier List IE for Cell identification discriminator = 0100 defined in 3GPP TS 08.08.

	8	7	6	5	4	3	2	1
Octet 4 Octet 5	LAC							
	LAC - continued							

Figure 10.19.5/3GPP TS 09.31: Coding of Network Element Identification using the LAC

Octets 4 to 5 are coded as the corresponding octets in the Cell Identification of the Cell Identifier List IE for Cell identification discriminator = 0101 defined in 3GPP TS 08.08.

10.20 Positioning Data

This is a variable length information element providing positioning data associated with a successful or unsuccessful location attempt for a target MS.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	spare				Positioning Data Discriminator			
Octets 4-4+m	Positioning Method 1							
Octets ...-4+nm	Positioning Method n							

Figure 10.20.1/3GPP TS 09.31: Positioning Data IE

The positioning data discriminator (bits 4-1 of octet 3) defines the type of data provided for each positioning method:

- 0000 indicate usage of each positioning method that was attempted either successfully or unsuccessfully
- all other values are reserved

Coding of the positioning method octets for positioning data discriminator = 0:

Octet x	positioning method	usage
---------	--------------------	-------

Coding of positioning method (bits 8-4):

- 00000 Timing Advance
- 00001 TOA
- 00010 AOA
- 00011 Mobile Assisted E-OTD
- 00100 Mobile Based E-OTD
- 00101 Mobile Assisted GPS
- 00110 Mobile Based GPS
- 00111 Conventional GPS
- 01000
- to reserved for GSM
- 01111
- 10000

to reserved for network specific positioning methods
11111

Coding of usage (bits 3-1)

- 000 Attempted unsuccessfully due to failure or interruption
- 001 Attempted successfully: results not used to generate location
- 010 Attempted successfully: results used to verify but not generate location
- 011 Attempted successfully: results used to generate location
- 100 Attempted successfully: case where MS supports multiple mobile based positioning methods and the actual method or methods used by the MS cannot be determined

10.21 Return Error Request

The Return Error Request parameter indicates a request from the source of a BSSMAP-LE connectionless information message for an error response if the message cannot be delivered to its final destination.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	Return Error Type							

Figure 10.21.1/3GPP TS 09.31: Return Error Request IE

Coding of Return Error Type (octet 3):

- 00000000 Return an unsegmented APDU or the first segment of a segmented APDU; no Return Error shall be sent if no APDU was received or if a subsequent segment of a segmented APDU was received
- 00000001 to 11111111 Reserved for future use

10.22 Return Error Cause

The Return Error Cause parameter provides the reason for unsuccessful delivery of a BSSMAP-LE Connectionless Information message to its final destination.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	Cause value							

Figure 10.22.1/3GPP TS 09.31: Return Error Cause IE

Table 10.22.1/3GPP TS 09.31: Cause value

Cause value (octet 3)	
Bits	
8 7 6 5 4 3 2 1	
0 0 0 0 0 0 0 0	Unspecified
0 0 0 0 0 0 0 1	System Failure
0 0 0 0 0 0 1 0	Protocol Error
0 0 0 0 0 0 1 1	Destination unknown
0 0 0 0 0 1 0 0	Destination unreachable
0 0 0 0 0 1 0 1	Congestion
0 0 0 0 0 1 1 0	
	to <i>unspecified</i> in this version of the protocol
1 1 1 1 1 1 1 1	

10.23 Security

This information element defines what security measures are needed for signaling to an LMU.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octet 3	spare						CIPH	AUTH

Figure 10.23.1/3GPP TS 09.31: Security IE

Coding of octet 3:

- bit 1 AUTH = authentication indicator
 - 0 : authentication of LMU not required
 - 1 : authentication of LMU required
- bit 2 CIPH = ciphering indicator
 - 0 : ciphering of LMU signaling data not required
 - 1 : ciphering of LMU signaling data required

10.24 Segmentation

This is a variable length information element that carries information for a segmented APDU.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octets 3-n	Segmentation and Message Information							

Figure 10.24.1/3GPP TS 09.31: Segmentation IE

There are two options for the coding of the Segmentation and Message Information portion; 1 octet containing segmentation information only and 3 octets containing segmentation and message information.

Encoding of Segmentation Information:

	8	7	6	5	4	3	2	1
Octet 3	Spare			S	Segment Number			

Figure 10.24.2/3GPP TS 09.31: Segmentation Information

Encoding of Segmentation and Message Information:

	8	7	6	5	4	3	2	1
Octet 3	Spare			S	Segment Number			
Octet 4-5	Message ID							

Figure 10.24.3/3GPP TS 09.31: Segmentation and Message Information

S (Segmentation Bit, bit 5 of octet 3)

- 0 final segment of a segmented message
- 1 non-final segment of a segmented message

Segment Number (bits 4-1 of octet 3)

This field contains a 4 bit binary representation of the segment number. The first segment has the value '0000', the next '0001', and so on.

Message ID (octets 4 and 5)

This field contains a 16 bit binary representation of the message identity, i.e. values 0-65535 are possible.

This field is used to identify to which messages different segments belong to.

10.25 Signaling Point Code

This is a variable length information element providing that provides the signaling point code of a network element.

	8	7	6	5	4	3	2	1
Octet 1	IEI							
Octet 2	Length indicator							
Octets 3-n	Signaling Point Code value							

Figure 10.25.1/3GPP TS 09.31: Signaling Point Code IE

There are three options for the coding of Signaling Point Code value; 2 octets containing a 14 bit ITU code, 3 octets containing a 24 bit unstructured code and 3 octets containing a 24 bit ANSI structured code.

Encoding of 14 bit ITU signaling point code:

Octet 3	0	0	signaling point code (high order bits)
Octets 4	signaling point code (low order bits)		

Encoding of a 24 bit unstructured signaling point code:

Octet 3	signaling point code (high order octet)
Octet 4	signaling point (second octet)
Octets 5	signaling point code (low order octet)

Encoding of a 24 bit ANSI structured signaling point code:

Octet 3	Network Identifier
Octet 4	Network Cluster
Octets 5	Network Cluster Member

Annex A (informative): Change history

Change history				
Meeting#	CR	Rev	Subject/Comment	New Version
SMG#31			Version for Release 1999	8.0.0
SMG#31bis	A013		Addition of Integrity Monitor Status	8.1.0
SMG#31bis	A009		Addition of missing "LMU Cause" IE	8.1.0
SMG#31bis	A011	1	Correction of Message Type Encoding and GPS Assistance Data IE	8.1.0
SMG#31bis	A012		Addition of Global reset and SCCP error procedures	8.1.0
SMG#32	A016		Error handling in case requested position method is not supported	8.2.0
GP-01	A018	1	Geographic Shape restriction in LCS	8.3.0
GP-01	-	-	References to GSM xx.xx changed to 3GPP TS xx.xx	8.3.0
GP-06	A025		Correction of Location Type IE length in BSSMAP-LE PERFORM LOCATION REQUEST message (R99)	8.4.0
GP-07	A027		Define IE's order of appearance in BSSAP-LE message	8.5.0
GP-07	A029	1	Define number of keys in Deciphering Keys IE	8.5.0
GP-10	A031	1	Clarify Requested GPS Assistance Data IE	8.6.0
GP-19	A032	2	Correction of behaviour of the Location Request procedure	8.7.0
May 2004	-	-	Revision marks removed	8.7.1

History

Document history		
V8.1.0	May 2000	Publication
V8.3.0	October 2000	Publication
V8.4.0	September 2001	Publication
V8.5.0	December 2001	Publication
V8.6.0	July 2002	Publication
V8.7.1	May 2004	Publication