



**Core Network and Interoperability Testing (INT);  
Malicious Communication Identification (MCID)  
using IP Multimedia (IM) Core Network (CN) subsystem;  
Conformance Test Specification (3GPP™ Release 12);  
Part 2: Test Suite Structure and Test Purposes (TSS&TP)**

---

**Reference**

RTS/INT-00153-2

---

**Keywords**

conformance, IMS, MCID, testing, TSS&amp;TP

**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2019.

All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

**3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

**GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Contents

Intellectual Property Rights .....	4
Foreword.....	4
Modal verbs terminology.....	4
1 Scope .....	5
2 References .....	5
2.1 Normative references .....	5
2.2 Informative references.....	5
3 Definition of terms, symbols and abbreviations.....	6
3.1 Terms.....	6
3.2 Symbols.....	6
3.3 Abbreviations .....	6
4 Test Suite Structure (TSS).....	6
4.0 Test Suite Structure table .....	6
4.1 Configuration .....	7
4.1.0 Introduction.....	7
4.1.1 Testing of the AS .....	7
4.1.2 Testing of the UE.....	8
5 Test Purposes (TP) .....	8
5.1 Introduction .....	8
5.1.1 TP naming convention .....	8
5.1.2 Test strategy.....	8
5.2 TPs for Malicious Communication Identification (MCID) .....	9
5.2.1 Actions at the AS of the terminating user .....	9
5.2.2 Actions at the destination UE .....	16
5.3 Interaction with other services.....	18
5.3.1 Explicit Communication Transfer (ECT) .....	18
History .....	19

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

---

# Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Core Network and Interoperability Testing (INT).

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

---

# 1 Scope

The present document is part 2 of a multi-part deliverable covering Malicious Communication Identification (MCID) using IP Multimedia (IM) Core Network (CN) subsystem; Conformance Test Specification, as identified below:

Part 1: "Protocol Implementation Conformance Statement (PICS)";

**Part 2: "Test Suite Structure and Test Purposes (TSS&TP)".**

---

# 2 References

## 2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI TS 124 616 (V12.1.0): "Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS); LTE; Malicious Communication Identification (MCID) using IP Multimedia (IM) Core Network (CN) subsystem; Protocol specification (3GPP TS 24.616 version 12.1.0 Release 12)".
- [2] ETSI TS 101 595-1: "Core Network and Interoperability Testing (INT); Malicious Communication Identification (MCID) using IP Multimedia (IM) Core Network (CN) subsystem; Conformance Test Specification (3GPP™ Release 12); Part 1: Protocol Implementation Conformance Statement (PICS)".

## 2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] IETF RFC 3966: "The tel URI for Telephone Numbers".
- [i.2] IETF RFC 3986: "Uniform Resource Identifier (URI): Generic Syntax".

## 3 Definition of terms, symbols and abbreviations

### 3.1 Terms

For the purposes of the present document, the terms given in ETSI TS 124 616 [1] and the following apply:

**communication information:** information collected and registered by the MCID service

**identity information:** all the information identifying a user, including trusted (network generated) and/or untrusted (user generated) identities

NOTE: See IETF RFC 3966 [i.1]/IETF RFC 3986 [i.2].

### 3.2 Symbols

For the purposes of the present document, the symbols given in ETSI TS 124 616 [1] apply.

### 3.3 Abbreviations

For the purposes of the present document, the abbreviations given in ETSI TS 124 616 [1] and the following apply:

AS	Application Server
ID	user IDentification
IM	IP Multimedia
IMS	IP Multimedia Subsystem
IP	Internet Protocol
ISC	IP multimedia subsystem Service Control
MCID	Malicious Call Identification
MIME	Multipurpose Internet Mail Extensions
SIP	Session Initiation Protocol
TP	Test Purposes
TSS	Test Suite Structure
UE	User Equipment
URI	Uniform Resource Identifier
XML	eXtensible Markup Language

## 4 Test Suite Structure (TSS)

### 4.0 Test Suite Structure table

Table 4.0-1: Test Suite Structure (TSS)

MCID			
	terminating_AS		MCID_N01_xxx
	destination_UE		MCID_U01_xxx
	interaction	ECT	MCID_N02_xxx

## 4.1 Configuration


### 4.1.0 Introduction

The scope of the present document is to test the signalling and procedural aspects of the stage 3 requirements as described in ETSI TS 124 616 [1]. The stage 3 description describes the requirements for several network entities and also the requirements regarding for terminal devices. Therefore several interfaces (reference points) are addressed to satisfy the test of the different entities.

Therefore to test the appropriate entities the configurations below are applicable.


#### 4.1.1 Testing of the AS

The AS entity is responsible for performing and managing services. The ISC interface is the appropriate access point for testing.

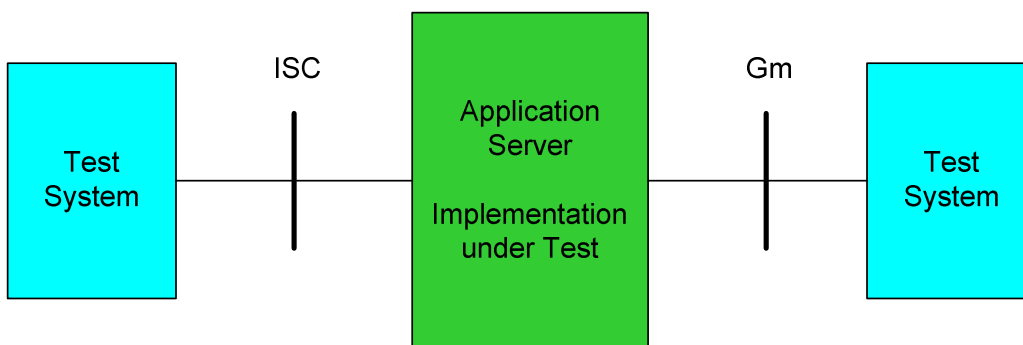

**Figure 4.1.1-1: Applicable interface to test AS functionalities**

If the ISC interface is not accessible it is also possible to perform the tests of the AS using any NNI (Mw, Mg, Mx) interface (see figure 4.1.1-2). In case only the Gm interface is accessible this interface can be used instead for testing, but the verification of all requirements may not be possible.

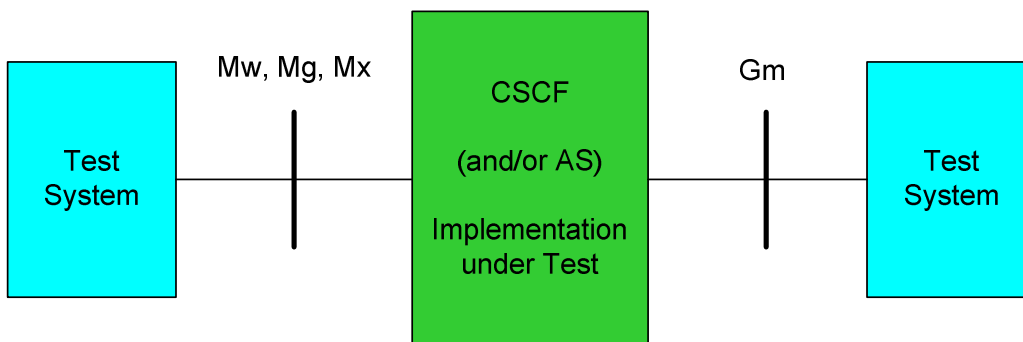

**Figure 4.1.1-2: Applicable interfaces for tests using a (generic) NNI interface**

### 4.1.2 Testing of the UE

There are special clauses in the protocol standard describing the procedures that apply at the originating and terminating user equipment. Therefore the test configuration below has been chosen.

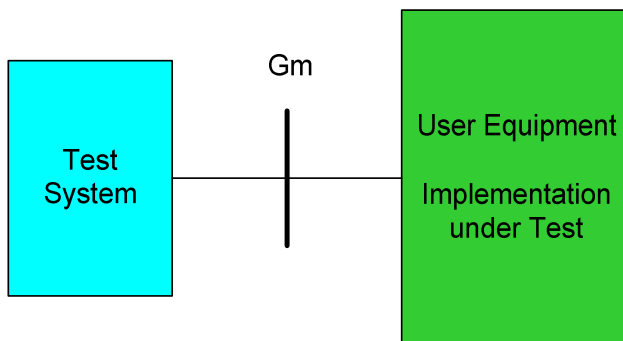


Figure 4.1.2-1: Applicable configuration to test UE functionalities

## 5 Test Purposes (TP)

### 5.1 Introduction

#### 5.1.1 TP naming convention

TPs are numbered, starting at 001, within each group. Groups are organized according to the TSS. Additional references are added to identify the actual test suite and whether it applies to the network or the user (see table 5.1.1-1).

Table 5.1.1-1: TP identifier naming convention scheme

Identifier: <ss>_<iut><group>_<nnn>			
<ss>	=	supplementary service:	e.g. "MCID"
<iut>	=	type of IUT:	U      User equipment N      Network entity
<group>	=	group	2 digit field representing group reference according to TSS
<nnn>	=	sequential number	(001-999)

#### 5.1.2 Test strategy

As the base standard ETSI TS 124 616 [1] contains no explicit requirements for testing, the TPs were generated as a result of an analysis of the base standard and the PICS specification ETSI TS 101 595-1 [2]. The criteria applied include the following:

- whether or not a test case can be built from the TP is not considered.



## 5.2 TPs for Malicious Communication Identification (MCID)

### 5.2.1 Actions at the AS of the terminating user

<b>TSS</b> MCID/terminating_AS	<b>TP</b> MCID_N01_001	<b>MCID reference</b> 4.5.2.5.2	<b>Selection expression</b> PICS 4.5.1/2 AND PICS 4.7.1/2
<b>Test purpose</b> <i>The AS holds the call state after a BYE from the originating UE</i> Ensure that the AS holds the confirmed call state while $T_{MCID-BYE}$ is running, if MCID is subscribed by the called user and a BYE was received from the originating user UE. When $T_{MCID-BYE}$ is expired, the BYE is forwarded to the terminating UE.			
<b>Preconditions:</b> Called user shall be configured with MCID subscription with Temporary Mode			
<b>SIP header values:</b>			
<b>Comments:</b>			
<b>Test equipment (ISC)</b>	<b>AS</b>		<b>Test equipment (Gm)</b>
INVITE	→		→ INVITE
100 Trying	←		← 100 Trying
180 Ringing	←		← 180 Ringing
200 OK INVITE	←		← 200 OK INVITE
ACK	→		→ ACK
BYE	→	$T_{MCID-BYE}$ started	
200 OK BYE	←		
		$T_{MCID-BYE}$ expires	
			→ BYE
			← 200 OK BYE

<b>TSS</b> MCID/terminating_AS	<b>TP</b> MCID_N01_002	<b>MCID reference</b> 4.5.2.5.2	<b>Selection expression</b> PICS 4.5.1/2 AND PICS 4.7.1/2
<b>Test purpose</b> <i>The AS holds the early dialogue state after a CANCEL from the originating UE</i> Ensure that the AS holds the early dialogue state while $T_{MCID-BYE}$ is running, if MCID is subscribed by the called user and a CANCEL was received from the originating user UE. When $T_{MCID-BYE}$ is expired, the CANCEL is forwarded to the terminating UE.			
<b>Preconditions:</b> Called user shall be configured with MCID subscription with Temporary Mode			
<b>SIP header values:</b>			
<b>Comments:</b>			
<b>Test equipment (ISC)</b>	<b>AS</b>		<b>Test equipment (Gm)</b>
INVITE	→		→ INVITE
100 Trying	←		← 100 Trying
180 Ringing	←		← 180 Ringing
CANCEL	→	$T_{MCID-BYE}$ started	
200 OK CANCEL	←		
487 Request Terminated	←		
ACK	→		
		$T_{MCID-BYE}$ expires	
			→ CANCEL
			← 200 OK CANCEL
			← 487 Request Terminated
			→ ACK

<b>TSS</b> MCID/terminating_AS	<b>TP</b> MCID_N01_003	<b>MCID reference</b> 4.5.2.5.2	<b>Selection expression</b> PICS 4.5.1/2 AND PICS 4.7.1/2																																				
<p><b>Test purpose</b>  <i>MCID request containing a mcid XML body. The AS holds the call state after a BYE from the originating UE in the confirmed dialogue</i>                  MCID is subscribed by the called user and a BYE was received from the originating user UE in the confirmed dialogue. Ensure that the AS holds the call state while <math>T_{MCID-BYE}</math> is running.                  If a reINVITE and the 'mcid' XML body is present to invoke the MCID service was received while <math>T_{MCID-BYE}</math> is running, ensure that the BYE is forwarded to the terminating UE when <math>T_{MCID-BYE}</math> is expired.</p>																																							
<p><b>Preconditions:</b> Called user shall be configured with MCID subscription with Temporary Mode</p>																																							
<p><b>SIP header values:</b>                  reINVITE without session modification                      XML mcid                          request                              McidRequestIndicator = 1                              HoldingIndicator=&lt;any value&gt;</p>																																							
<p><b>Comments:</b></p> <table border="0"> <thead> <tr> <th>Test equipment (ISC)</th> <th>AS</th> <th>Test equipment (Gm)</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td>→</td> <td>→ INVITE</td> </tr> <tr> <td>100 Trying</td> <td>←</td> <td>← 100 Trying</td> </tr> <tr> <td>180 Ringing</td> <td>←</td> <td>← 180 Ringing</td> </tr> <tr> <td>200 OK INVITE</td> <td>←</td> <td>← 200 OK INVITE</td> </tr> <tr> <td>ACK</td> <td>→</td> <td>→ ACK</td> </tr> <tr> <td>BYE</td> <td>→ <math>T_{MCID-BYE}</math> started</td> <td></td> </tr> <tr> <td>200 OK BYE</td> <td>←</td> <td>← Re-INVITE requesting MCID</td> </tr> <tr> <td></td> <td></td> <td>→ 200 OK INVITE</td> </tr> <tr> <td></td> <td></td> <td>← ACK</td> </tr> <tr> <td></td> <td><math>T_{MCID-BYE}</math> expires</td> <td>→ BYE</td> </tr> <tr> <td></td> <td></td> <td>← 200 OK BYE</td> </tr> </tbody> </table>				Test equipment (ISC)	AS	Test equipment (Gm)	INVITE	→	→ INVITE	100 Trying	←	← 100 Trying	180 Ringing	←	← 180 Ringing	200 OK INVITE	←	← 200 OK INVITE	ACK	→	→ ACK	BYE	→ $T_{MCID-BYE}$ started		200 OK BYE	←	← Re-INVITE requesting MCID			→ 200 OK INVITE			← ACK		$T_{MCID-BYE}$ expires	→ BYE			← 200 OK BYE
Test equipment (ISC)	AS	Test equipment (Gm)																																					
INVITE	→	→ INVITE																																					
100 Trying	←	← 100 Trying																																					
180 Ringing	←	← 180 Ringing																																					
200 OK INVITE	←	← 200 OK INVITE																																					
ACK	→	→ ACK																																					
BYE	→ $T_{MCID-BYE}$ started																																						
200 OK BYE	←	← Re-INVITE requesting MCID																																					
		→ 200 OK INVITE																																					
		← ACK																																					
	$T_{MCID-BYE}$ expires	→ BYE																																					
		← 200 OK BYE																																					

<b>TSS</b> MCID/terminating_AS	<b>TP</b> MCID_N01_004	<b>MCID reference</b> 4.5.2.5.2	<b>Selection expression</b> PICS 4.5.1/2 AND PICS 4.7.1/2																																				
<p><b>Test purpose</b>  <i>MCID request a mcid XML body is not present. The AS holds the call state after a BYE from the originating UE in the confirmed dialogue</i>                  MCID is subscribed in Temporary Mode by the called user and a BYE was received from the originating user UE in the confirmed dialogue. Ensure that the AS holds the call state while <math>T_{MCID-BYE}</math> is running.                  If a reINVITE and the 'mcid' XML body is not present to invoke the MCID service was received while <math>T_{MCID-BYE}</math> is running, ensure that the BYE is forwarded to the terminating UE when <math>T_{MCID-BYE}</math> is expired.</p>																																							
<p><b>Preconditions:</b> Called user shall be configured with MCID subscription with Temporary Mode</p>																																							
<p><b>SIP header values:</b>                  reINVITE without session modification</p>																																							
<p><b>Comments:</b></p> <table border="0"> <thead> <tr> <th>Test equipment (ISC)</th> <th>AS</th> <th>Test equipment (Gm)</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td>→</td> <td>→ INVITE</td> </tr> <tr> <td>100 Trying</td> <td>←</td> <td>← 100 Trying</td> </tr> <tr> <td>180 Ringing</td> <td>←</td> <td>← 180 Ringing</td> </tr> <tr> <td>200 OK INVITE</td> <td>←</td> <td>← 200 OK INVITE</td> </tr> <tr> <td>ACK</td> <td>→</td> <td>→ ACK</td> </tr> <tr> <td>BYE</td> <td>→ <math>T_{MCID-BYE}</math> started</td> <td></td> </tr> <tr> <td>200 OK BYE</td> <td>←</td> <td>← Re-INVITE requesting MCID</td> </tr> <tr> <td></td> <td></td> <td>→ 200 OK INVITE</td> </tr> <tr> <td></td> <td></td> <td>← ACK</td> </tr> <tr> <td></td> <td><math>T_{MCID-BYE}</math> expires</td> <td>→ BYE</td> </tr> <tr> <td></td> <td></td> <td>← 200 OK BYE</td> </tr> </tbody> </table>				Test equipment (ISC)	AS	Test equipment (Gm)	INVITE	→	→ INVITE	100 Trying	←	← 100 Trying	180 Ringing	←	← 180 Ringing	200 OK INVITE	←	← 200 OK INVITE	ACK	→	→ ACK	BYE	→ $T_{MCID-BYE}$ started		200 OK BYE	←	← Re-INVITE requesting MCID			→ 200 OK INVITE			← ACK		$T_{MCID-BYE}$ expires	→ BYE			← 200 OK BYE
Test equipment (ISC)	AS	Test equipment (Gm)																																					
INVITE	→	→ INVITE																																					
100 Trying	←	← 100 Trying																																					
180 Ringing	←	← 180 Ringing																																					
200 OK INVITE	←	← 200 OK INVITE																																					
ACK	→	→ ACK																																					
BYE	→ $T_{MCID-BYE}$ started																																						
200 OK BYE	←	← Re-INVITE requesting MCID																																					
		→ 200 OK INVITE																																					
		← ACK																																					
	$T_{MCID-BYE}$ expires	→ BYE																																					
		← 200 OK BYE																																					

<b>TSS</b> MCID/terminating_AS	<b>TP</b> MCID_N01_005	<b>MCID reference</b> 4.5.2.5.2	<b>Selection expression</b> PICS 4.5.1/2 AND PICS 4.7.1/2
<b>Test purpose</b> <i>MCID request containing a mcid XML body in the confirmed dialogue</i> MCID is subscribed with Temporary Mode by the called user Ensure that a reINVITE and the 'mcid' XML body is present to invoke the MCID service was received in the confirmed state the reINVITE is not sent toward the originating UE.			
<b>Preconditions:</b> Called user shall be configured with MCID subscription with Temporary Mode			
<b>SIP header values:</b> reINVITE without session modification XML mcid request McidRequestIndicator = 1 HoldingIndicator=<any value>			
<b>Comments:</b>			
<b>Test equipment (ISC)</b>	<b>AS</b>		<b>Test equipment (Gm)</b>
INVITE	→		→ INVITE
100 Trying	←		← 100 Trying
180 Ringing	←		← 180 Ringing
200 OK INVITE	←		← 200 OK INVITE
ACK	→		→ ACK
			← Re-INVITE requesting MCID
			→ 200 OK INVITE
			← ACK
<b>Apply post test routine</b>			

<b>TSS</b> MCID/terminating_AS	<b>TP</b> MCID_N01_006	<b>MCID reference</b> 4.5.2.5.2	<b>Selection expression</b> PICS 4.5.1/2 AND PICS 4.7.1/2
<b>Test purpose</b> <i>MCID request a mcid XML body is not present in the confirmed dialogue</i> MCID is subscribed with Temporary Mode by the called user A reINVITE and the 'mcid' XML body is not present to invoke the MCID service was received in the confirmed state the reINVITE is possible sent toward the originating UE.			
<b>Preconditions:</b> Called user shall be configured with MCID subscription with Temporary Mode			
<b>SIP header values:</b> reINVITE without session modification			
<b>Comments:</b>			
<b>Test equipment (ISC)</b>	<b>AS</b>		<b>Test equipment (Gm)</b>
INVITE	→		→ INVITE
100 Trying	←		← 100 Trying
180 Ringing	←		← 180 Ringing
200 OK INVITE	←		← 200 OK INVITE
ACK	→		→ ACK
<b>CASE A</b>			← Re-INVITE requesting MCID
			→ 200 OK INVITE
			← ACK
<b>CASE B</b>			← Re-INVITE requesting MCID
Re-INVITE	←		← Re-INVITE requesting MCID
200 OK INVITE	→		→ 200 OK INVITE
ACK	←		← ACK
<b>Apply post test routine</b>			

<b>TSS</b> MCID/terminating_AS	<b>TP</b> MCID_N01_007	<b>MCID reference</b> 4.5.2.5.2	<b>Selection expression</b> PICS 4.5.1/2 AND PICS 4.7.1/2																																																			
<p><b>Test purpose</b>  <i>MCID request containing a mcid XML body. The AS holds the call state after a CANCEL from the originating UE in the early dialogue</i>                  MCID is subscribed with Temporary Mode by the called user and a CANCEL was received from the originating user UE in the early dialogue. Ensure that the AS holds the call state while <math>T_{MCID-BYE}</math> is running.                  If a reINVITE to invoke the MCID service was received and the 'mcid' XML body is present while <math>T_{MCID-BYE}</math> is running, ensure that the CANCEL is forwarded to the terminating UE when timer <math>T_{MCID-BYE}</math> is expired.</p>																																																						
<p><b>Preconditions:</b> Called user shall be configured with MCID subscription with Temporary Mode</p>																																																						
<p><b>SIP header values:</b>                  reINVITE without session modification                      XML mcid                          request                          McidRequestIndicator = 1                          HoldingIndicator=&lt;any value&gt;</p>																																																						
<p><b>Comments:</b></p> <table border="0"> <thead> <tr> <th style="text-align: left;">Test equipment (ISC)</th> <th style="text-align: center;">AS</th> <th style="text-align: right;">Test equipment (Gm)</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> </tr> <tr> <td>100 Trying</td> <td style="text-align: center;">←</td> <td>← 100 Trying</td> </tr> <tr> <td>180 Ringing</td> <td style="text-align: center;">←</td> <td>← 180 Ringing</td> </tr> <tr> <td>CANCEL</td> <td style="text-align: center;">→</td> <td></td> </tr> <tr> <td>200 OK CANCEL</td> <td style="text-align: center;">←</td> <td></td> </tr> <tr> <td>487 Request Terminated</td> <td style="text-align: center;">←</td> <td></td> </tr> <tr> <td>ACK</td> <td style="text-align: center;">→</td> <td></td> </tr> <tr> <td></td> <td style="text-align: center;"><math>T_{MCID-BYE}</math> started</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">← Re-INVITE requesting MCID</td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">→ 200 OK INVITE</td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">← ACK</td> </tr> <tr> <td></td> <td style="text-align: center;"><math>T_{MCID-BYE}</math> expires</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">→ CANCEL</td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">← 200 OK CANCEL</td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">← 487 Request Terminated</td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">→ ACK</td> </tr> </tbody> </table>				Test equipment (ISC)	AS	Test equipment (Gm)	INVITE	→	→ INVITE	100 Trying	←	← 100 Trying	180 Ringing	←	← 180 Ringing	CANCEL	→		200 OK CANCEL	←		487 Request Terminated	←		ACK	→			$T_{MCID-BYE}$ started				← Re-INVITE requesting MCID			→ 200 OK INVITE			← ACK		$T_{MCID-BYE}$ expires				→ CANCEL			← 200 OK CANCEL			← 487 Request Terminated			→ ACK
Test equipment (ISC)	AS	Test equipment (Gm)																																																				
INVITE	→	→ INVITE																																																				
100 Trying	←	← 100 Trying																																																				
180 Ringing	←	← 180 Ringing																																																				
CANCEL	→																																																					
200 OK CANCEL	←																																																					
487 Request Terminated	←																																																					
ACK	→																																																					
	$T_{MCID-BYE}$ started																																																					
		← Re-INVITE requesting MCID																																																				
		→ 200 OK INVITE																																																				
		← ACK																																																				
	$T_{MCID-BYE}$ expires																																																					
		→ CANCEL																																																				
		← 200 OK CANCEL																																																				
		← 487 Request Terminated																																																				
		→ ACK																																																				

<b>TSS</b> MCID/terminating_AS	<b>TP</b> MCID_N01_008	<b>MCID reference</b> 4.5.2.5.2	<b>Selection expression</b> PICS 4.5.1/2 AND PICS 4.7.1/2																																																
<p><b>Test purpose</b>  <i>MCID request a mcid XML body is not present. The AS holds the call state after a CANCEL from the originating UE in the early dialogue</i>                  MCID is subscribed in Temporary Mode by the called user and a CANCEL was received from the originating user UE in the early dialogue. Ensure that the AS holds the call state while <math>T_{MCID-BYE}</math> is running.                  If a reINVITE to invoke the MCID service was received and the 'mcid' XML body is not present while <math>T_{MCID-BYE}</math> is running, ensure that the CANCEL is forwarded to the terminating UE when timer <math>T_{MCID-BYE}</math> is expired.</p>																																																			
<p><b>Preconditions:</b> Called user shall be configured with MCID subscription with Temporary Mode</p>																																																			
<p><b>SIP header values:</b> reINVITE without session modification</p>																																																			
<p><b>Comments:</b></p> <table border="0"> <thead> <tr> <th style="text-align: left;">Test equipment (ISC)</th> <th style="text-align: center;">AS</th> <th style="text-align: right;">Test equipment (Gm)</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td style="text-align: right;">→ INVITE</td> </tr> <tr> <td>100 Trying</td> <td style="text-align: center;">←</td> <td style="text-align: right;">← 100 Trying</td> </tr> <tr> <td>180 Ringing</td> <td style="text-align: center;">←</td> <td style="text-align: right;">← 180 Ringing</td> </tr> <tr> <td>CANCEL</td> <td style="text-align: center;">→</td> <td style="text-align: right;"><math>T_{MCID-BYE}</math> started</td> </tr> <tr> <td>200 OK CANCEL</td> <td style="text-align: center;">←</td> <td></td> </tr> <tr> <td>487 Request Terminated</td> <td style="text-align: center;">←</td> <td></td> </tr> <tr> <td>ACK</td> <td style="text-align: center;">→</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">← Re-INVITE requesting MCID</td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">→ 200 OK INVITE</td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">← ACK</td> </tr> <tr> <td></td> <td style="text-align: center;"><math>T_{MCID-BYE}</math> expires</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">→ CANCEL</td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">← 200 OK CANCEL</td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">← 487 Request Terminated</td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">→ ACK</td> </tr> </tbody> </table>				Test equipment (ISC)	AS	Test equipment (Gm)	INVITE	→	→ INVITE	100 Trying	←	← 100 Trying	180 Ringing	←	← 180 Ringing	CANCEL	→	$T_{MCID-BYE}$ started	200 OK CANCEL	←		487 Request Terminated	←		ACK	→				← Re-INVITE requesting MCID			→ 200 OK INVITE			← ACK		$T_{MCID-BYE}$ expires				→ CANCEL			← 200 OK CANCEL			← 487 Request Terminated			→ ACK
Test equipment (ISC)	AS	Test equipment (Gm)																																																	
INVITE	→	→ INVITE																																																	
100 Trying	←	← 100 Trying																																																	
180 Ringing	←	← 180 Ringing																																																	
CANCEL	→	$T_{MCID-BYE}$ started																																																	
200 OK CANCEL	←																																																		
487 Request Terminated	←																																																		
ACK	→																																																		
		← Re-INVITE requesting MCID																																																	
		→ 200 OK INVITE																																																	
		← ACK																																																	
	$T_{MCID-BYE}$ expires																																																		
		→ CANCEL																																																	
		← 200 OK CANCEL																																																	
		← 487 Request Terminated																																																	
		→ ACK																																																	

<b>TSS</b> MCID/terminating_AS	<b>TP</b> MCID_N01_009	<b>MCID reference</b> 4.5.2.5.3	<b>Selection expression</b> PICS 4.5.1/2 AND PICS 4.7.1/3																																																																																
<p><b>Test purpose</b>  <i>Requesting the originating identity not received in the initial INVITE; response received containing the requested Identity</i>                  An INVITE request was received and a P-Asserted-Identity is not present. Ensure that the AS, having sent an INFO message containing a XML 'mcid' body with MCID XML Request schema requesting the originating ID, on receipt of an INFO message containing a XML 'mcid' body with MCID XML Response schema and the originating identity, passes on the 180 Ringing from the called user.</p>																																																																																			
<p><b>Preconditions:</b> Called user shall be configured with MCID subscription (Permanent Mode or Temporary Mode)</p>																																																																																			
<p><b>SIP header values:</b>                  INVITE: without P-Asserted-Identity                  INFO1                      XML mcid request                          McidRequestIndicator = 1                          HoldingIndicator=&lt;any value&gt;                  INFO2                      XML mcid Response                          McidResponseIndicator = 1                          OrigPartyIdentity (optional)                          OrigPartyPresentationRestriction (optional)                          GenericNumber (optional)                          GenericNumberPresentationRestriction (optional)</p>																																																																																			
<p><b>Comments:</b></p> <table border="0"> <thead> <tr> <th>Test equipment (ISC)</th> <th></th> <th>AS</th> <th></th> <th>Test equipment (Gm)</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td>→</td> <td></td> <td></td> <td></td> </tr> <tr> <td>100 Trying</td> <td>←</td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="5"><b>CASE A</b></td> </tr> <tr> <td>INFO1 (MIME body)</td> <td>←</td> <td>T<sub>O-ID</sub> started</td> <td>→</td> <td>INVITE</td> </tr> <tr> <td>200 OK INFO</td> <td>→</td> <td></td> <td>←</td> <td>100 Trying</td> </tr> <tr> <td></td> <td></td> <td></td> <td>←</td> <td>180 Ringing</td> </tr> <tr> <td>INFO2 (MIME body)</td> <td>→</td> <td>T<sub>O-ID</sub> stopped</td> <td></td> <td></td> </tr> <tr> <td>200 OK INFO</td> <td>←</td> <td></td> <td></td> <td></td> </tr> <tr> <td>180 Ringing</td> <td>←</td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="5"><b>CASE B</b></td> </tr> <tr> <td>INFO1 (MIME body)</td> <td>←</td> <td>T<sub>O-ID</sub> started</td> <td></td> <td></td> </tr> <tr> <td>200 OK INFO</td> <td>→</td> <td></td> <td></td> <td></td> </tr> <tr> <td>INFO2 (MIME body)</td> <td>→</td> <td>T<sub>O-ID</sub> stopped</td> <td>→</td> <td>INVITE</td> </tr> <tr> <td>200 OK INFO</td> <td>←</td> <td></td> <td>←</td> <td>100 Trying</td> </tr> <tr> <td>180 Ringing</td> <td>←</td> <td></td> <td>←</td> <td>180 Ringing</td> </tr> </tbody> </table> <p style="text-align: center;"><b>Apply post test routine</b></p>				Test equipment (ISC)		AS		Test equipment (Gm)	INVITE	→				100 Trying	←				<b>CASE A</b>					INFO1 (MIME body)	←	T <sub>O-ID</sub> started	→	INVITE	200 OK INFO	→		←	100 Trying				←	180 Ringing	INFO2 (MIME body)	→	T <sub>O-ID</sub> stopped			200 OK INFO	←				180 Ringing	←				<b>CASE B</b>					INFO1 (MIME body)	←	T <sub>O-ID</sub> started			200 OK INFO	→				INFO2 (MIME body)	→	T <sub>O-ID</sub> stopped	→	INVITE	200 OK INFO	←		←	100 Trying	180 Ringing	←		←	180 Ringing
Test equipment (ISC)		AS		Test equipment (Gm)																																																																															
INVITE	→																																																																																		
100 Trying	←																																																																																		
<b>CASE A</b>																																																																																			
INFO1 (MIME body)	←	T <sub>O-ID</sub> started	→	INVITE																																																																															
200 OK INFO	→		←	100 Trying																																																																															
			←	180 Ringing																																																																															
INFO2 (MIME body)	→	T <sub>O-ID</sub> stopped																																																																																	
200 OK INFO	←																																																																																		
180 Ringing	←																																																																																		
<b>CASE B</b>																																																																																			
INFO1 (MIME body)	←	T <sub>O-ID</sub> started																																																																																	
200 OK INFO	→																																																																																		
INFO2 (MIME body)	→	T <sub>O-ID</sub> stopped	→	INVITE																																																																															
200 OK INFO	←		←	100 Trying																																																																															
180 Ringing	←		←	180 Ringing																																																																															

<b>TSS</b> MCID/terminating_AS	<b>TP</b> MCID_N01_010	<b>MCID reference</b> 4.5.2.5.3	<b>Selection expression</b> PICS 4.5.1/2 AND PICS 4.7.1/3																																																
<p><b>Test purpose</b>  <i>Requesting the originating identity not received in the initial INVITE; response received without originating Identity</i>                  An INVITE request was received and a P-Asserted-Identity is not present.                  Ensure that the AS, having sent an INFO message containing a XML 'mcid' body with MCID XML Request schema requesting the originating ID, on receipt of an INFO message not containing the originating identity, passes on the 180 Ringing from the called user.</p>																																																			
<p><b>Preconditions:</b> Called user shall be configured with MCID subscription (Permanent Mode or Temporary Mode)</p>																																																			
<p><b>SIP header values:</b>                  INVITE: without P-Asserted-Identity                  INFO1                      XML mcid request                          McidRequestIndicator = 1                          HoldingIndicator=&lt;any value&gt;                  INFO2                      XML mcid response                          McidResponseIndicator = 0                          without originating identity</p>																																																			
<p><b>Comments:</b></p> <table border="0"> <thead> <tr> <th style="text-align: left;">Test equipment (ISC)</th> <th style="text-align: center;">AS</th> <th style="text-align: right;">Test equipment (Gm)</th> </tr> </thead> <tbody> <tr> <td>INVITE</td> <td style="text-align: center;">→</td> <td></td> </tr> <tr> <td>100 Trying</td> <td style="text-align: center;">←</td> <td></td> </tr> <tr> <td colspan="3"><b>CASE A</b></td> </tr> <tr> <td>INFO1 (MIME body)</td> <td style="text-align: center;">←</td> <td style="text-align: right;">T<sub>O-ID</sub> started → INVITE</td> </tr> <tr> <td>200 OK INFO</td> <td style="text-align: center;">→</td> <td style="text-align: right;">← 100 Trying</td> </tr> <tr> <td></td> <td></td> <td style="text-align: right;">← 180 Ringing</td> </tr> <tr> <td>INFO2 (MIME body)</td> <td style="text-align: center;">→</td> <td style="text-align: right;">T<sub>O-ID</sub> stopped</td> </tr> <tr> <td>200 OK INFO</td> <td style="text-align: center;">←</td> <td></td> </tr> <tr> <td>180 Ringing</td> <td style="text-align: center;">←</td> <td></td> </tr> <tr> <td colspan="3"><b>CASE B</b></td> </tr> <tr> <td>INFO1 (MIME body)</td> <td style="text-align: center;">←</td> <td style="text-align: right;">T<sub>O-ID</sub> started</td> </tr> <tr> <td>200 OK INFO</td> <td style="text-align: center;">→</td> <td></td> </tr> <tr> <td>INFO2 (MIME body)</td> <td style="text-align: center;">→</td> <td style="text-align: right;">T<sub>O-ID</sub> stopped → INVITE</td> </tr> <tr> <td>200 OK INFO</td> <td style="text-align: center;">←</td> <td style="text-align: right;">← 100 Trying</td> </tr> <tr> <td>180 Ringing</td> <td style="text-align: center;">←</td> <td style="text-align: right;">← 180 Ringing</td> </tr> </tbody> </table> <p style="text-align: center;"><b>Apply post test routine</b></p>				Test equipment (ISC)	AS	Test equipment (Gm)	INVITE	→		100 Trying	←		<b>CASE A</b>			INFO1 (MIME body)	←	T <sub>O-ID</sub> started → INVITE	200 OK INFO	→	← 100 Trying			← 180 Ringing	INFO2 (MIME body)	→	T <sub>O-ID</sub> stopped	200 OK INFO	←		180 Ringing	←		<b>CASE B</b>			INFO1 (MIME body)	←	T <sub>O-ID</sub> started	200 OK INFO	→		INFO2 (MIME body)	→	T <sub>O-ID</sub> stopped → INVITE	200 OK INFO	←	← 100 Trying	180 Ringing	←	← 180 Ringing
Test equipment (ISC)	AS	Test equipment (Gm)																																																	
INVITE	→																																																		
100 Trying	←																																																		
<b>CASE A</b>																																																			
INFO1 (MIME body)	←	T <sub>O-ID</sub> started → INVITE																																																	
200 OK INFO	→	← 100 Trying																																																	
		← 180 Ringing																																																	
INFO2 (MIME body)	→	T <sub>O-ID</sub> stopped																																																	
200 OK INFO	←																																																		
180 Ringing	←																																																		
<b>CASE B</b>																																																			
INFO1 (MIME body)	←	T <sub>O-ID</sub> started																																																	
200 OK INFO	→																																																		
INFO2 (MIME body)	→	T <sub>O-ID</sub> stopped → INVITE																																																	
200 OK INFO	←	← 100 Trying																																																	
180 Ringing	←	← 180 Ringing																																																	

<b>TSS</b> MCID/terminating_AS	<b>TP</b> MCID_N01_011	<b>MCID reference</b> 4.5.2.5.3	<b>Selection expression</b> PICS 4.5.1/2 AND PICS 4.7.1/3																																																								
<b>Test purpose</b> <i>Requesting the originating identity not received in the initial INVITE; no response received</i> An INVITE request was received and a P-Asserted. Identity is not present. Ensure that the AS, having sent an INFO message containing a XML 'mcid' body with MCID XML Request schema requesting the originating ID, on the expiry of T <sub>O-ID</sub> , passes on the 180 Ringing from the called user.																																																											
<b>Preconditions:</b> Called user shall be configured with MCID subscription (Permanent Mode or Temporary Mode)																																																											
<b>SIP header values:</b> INFO XML mcid request MclidRequestIndicator = 1 HoldingIndicator=<any value>																																																											
<b>Comments:</b> <table border="0" style="width:100%"> <tr> <td style="width:30%"><b>Test equipment (ISC)</b></td> <td style="width:10%; text-align:center"><b>AS</b></td> <td style="width:10%;"></td> <td style="width:30%; text-align:right"><b>Test equipment (Gm)</b></td> </tr> <tr> <td>INVITE</td> <td></td> <td style="text-align:center">→</td> <td></td> </tr> <tr> <td>100 Trying</td> <td></td> <td style="text-align:center">←</td> <td></td> </tr> <tr> <td colspan="4"><b>CASE A</b></td> </tr> <tr> <td>INFO (MIME body)</td> <td style="text-align:center">←</td> <td>T<sub>O-ID</sub> started</td> <td style="text-align:center">→</td> </tr> <tr> <td>200 OK INFO</td> <td style="text-align:center">→</td> <td></td> <td style="text-align:center">←</td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align:center">←</td> </tr> <tr> <td>180 Ringing</td> <td style="text-align:center">←</td> <td>T<sub>O-ID</sub> expires</td> <td></td> </tr> <tr> <td colspan="4"><b>CASE B</b></td> </tr> <tr> <td>INFO1 (MIME body)</td> <td style="text-align:center">←</td> <td>T<sub>O-ID</sub> started</td> <td></td> </tr> <tr> <td>200 OK INFO</td> <td style="text-align:center">→</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align:center">T<sub>O-ID</sub> expires</td> <td style="text-align:center">→</td> </tr> <tr> <td></td> <td></td> <td></td> <td style="text-align:center">←</td> </tr> <tr> <td>180 Ringing</td> <td style="text-align:center">←</td> <td></td> <td style="text-align:center">←</td> </tr> </table> <p style="text-align:center"><b>Apply post test routine</b></p>				<b>Test equipment (ISC)</b>	<b>AS</b>		<b>Test equipment (Gm)</b>	INVITE		→		100 Trying		←		<b>CASE A</b>				INFO (MIME body)	←	T <sub>O-ID</sub> started	→	200 OK INFO	→		←				←	180 Ringing	←	T <sub>O-ID</sub> expires		<b>CASE B</b>				INFO1 (MIME body)	←	T <sub>O-ID</sub> started		200 OK INFO	→					T <sub>O-ID</sub> expires	→				←	180 Ringing	←		←
<b>Test equipment (ISC)</b>	<b>AS</b>		<b>Test equipment (Gm)</b>																																																								
INVITE		→																																																									
100 Trying		←																																																									
<b>CASE A</b>																																																											
INFO (MIME body)	←	T <sub>O-ID</sub> started	→																																																								
200 OK INFO	→		←																																																								
			←																																																								
180 Ringing	←	T <sub>O-ID</sub> expires																																																									
<b>CASE B</b>																																																											
INFO1 (MIME body)	←	T <sub>O-ID</sub> started																																																									
200 OK INFO	→																																																										
		T <sub>O-ID</sub> expires	→																																																								
			←																																																								
180 Ringing	←		←																																																								

### 5.2.2 Actions at the destination UE

<b>TSS</b> MCID/destination_UE	<b>TP</b> MCID_U01_001	<b>MCID reference</b> 4.5.2.12	<b>Selection expression</b> PICS 4.5.1/1 AND PICS 4.6.1/1																																				
<b>Test purpose</b> <i>The UE sends a MCID request in the confirmed state</i> Ensure that the UE is able to invoke MCID in the confirmed state. The UE sends a Re-INVITE without session modification and no 'mcid' XML element is present.																																							
<b>Preconditions:</b>																																							
<b>SIP header values:</b> Re-INVITE without session modification																																							
<b>Comments:</b> <table border="0" style="width:100%"> <tr> <td style="width:30%;"><b>Test equipment</b></td> <td style="width:10%;"></td> <td style="width:10%;"></td> <td style="width:30%; text-align:right"><b>User equipment</b></td> </tr> <tr> <td></td> <td></td> <td style="text-align:center">INVITE</td> <td style="text-align:center">→</td> </tr> <tr> <td></td> <td style="text-align:center">←</td> <td style="text-align:center">100 Trying</td> <td></td> </tr> <tr> <td></td> <td style="text-align:center">←</td> <td style="text-align:center">180 Ringing</td> <td></td> </tr> <tr> <td></td> <td style="text-align:center">←</td> <td style="text-align:center">200 OK INVITE</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align:center">ACK</td> <td style="text-align:center">→</td> </tr> <tr> <td></td> <td style="text-align:center">←</td> <td style="text-align:center">Re-INVITE requesting MCID</td> <td></td> </tr> <tr> <td></td> <td></td> <td style="text-align:center">200 OK INVITE</td> <td></td> </tr> <tr> <td></td> <td style="text-align:center">←</td> <td style="text-align:center">ACK</td> <td style="text-align:center">←</td> </tr> </table> <p style="text-align:center"><b>Apply post test routine</b></p>				<b>Test equipment</b>			<b>User equipment</b>			INVITE	→		←	100 Trying			←	180 Ringing			←	200 OK INVITE				ACK	→		←	Re-INVITE requesting MCID				200 OK INVITE			←	ACK	←
<b>Test equipment</b>			<b>User equipment</b>																																				
		INVITE	→																																				
	←	100 Trying																																					
	←	180 Ringing																																					
	←	200 OK INVITE																																					
		ACK	→																																				
	←	Re-INVITE requesting MCID																																					
		200 OK INVITE																																					
	←	ACK	←																																				



<b>TSS</b> MCID/destination_UE	<b>TP</b> MCID_U01_002	<b>MCID reference</b> 4.5.2.12	<b>Selection expression</b> PICS 4.5.1/1 AND PICS 4.6.1/1
<b>Test purpose</b> <i>The UE sends a MCID request in the early dialogue</i> Ensure that the UE is able to invoke MCID in the early dialogue. The UE sends a Re-INVITE without session modification and no 'mcid' XML element is present.			
<b>Preconditions:</b>			
<b>SIP header values:</b> Re-INVITE without session modification			
<b>Comments:</b>			
<b>Test equipment</b>			<b>User equipment</b>
		INVITE	→
	←	100 Trying	
	←	180 Ringing	
	←	Re-INVITE requesting MCID	
	←	200 OK INVITE	
	←	ACK	←
		<b>Apply post test routine</b>	

<b>TSS</b> MCID/destination_UE	<b>TP</b> MCID_U01_003	<b>MCID reference</b> 4.5.2.12	<b>Selection expression</b> PICS 4.5.1/1 AND PICS 4.6.1/2
<b>Test purpose</b> <i>The UE sends a MCID request using the XML <b>McidRequestIndicator</b> in the confirmed state</i> Ensure that the UE is able to invoke MCID in the confirmed state. The UE sends a Re-INVITE without session modification. Ensure that the UE is able to send a 'mcid' XML MIME body with the <b>McidRequestIndicator</b> set to 1.			
<b>Preconditions:</b>			
<b>SIP header values:</b> Re-INVITE without session modification XML mcid request McidRequestIndicator = '1' HoldingIndicator=<any value>			
<b>Comments:</b>			
<b>Test equipment</b>			<b>User equipment</b>
		INVITE	→
	←	100 Trying	
	←	180 Ringing	
	←	200 OK INVITE	
	←	ACK	→
	←	Re-INVITE requesting MCID	
	←	200 OK INVITE	→
	←	ACK	
		<b>Apply post test routine</b>	

<b>TSS</b> MCID/destination_UE	<b>TP</b> MCID_U01_004	<b>MCID reference</b> 4.5.2.12	<b>Selection expression</b> PICS 4.5.1/1 AND PICS 4.6.1/2																		
<b>Test purpose</b> <i>The UE sends a MCID request using the XML <b>McidRequestIndicator</b> in the early dialogue</i> Ensure that the UE is able to invoke MCID in the early dialogue. The UE sends a Re-INVITE without session modification. Ensure that the UE is able to send a 'mcid' XML MIME body with the <b>McidRequestIndicator</b> set to 1.																					
<b>Preconditions:</b> <b>SIP header values:</b> Re-INVITE without session modification XML mcid request McidRequestIndicator = '1' HoldingIndicator=<any value>																					
<b>Comments:</b> <b>Test equipment</b> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;"></td> <td style="width: 40%; text-align: center;">INVITE</td> <td style="width: 30%; text-align: right;">→</td> </tr> <tr> <td style="text-align: right;">←</td> <td style="text-align: center;">100 Trying</td> <td></td> </tr> <tr> <td style="text-align: right;">←</td> <td style="text-align: center;">180 Ringing</td> <td></td> </tr> <tr> <td style="text-align: right;">←</td> <td style="text-align: center;">Re-INVITE requesting MCID</td> <td></td> </tr> <tr> <td style="text-align: right;">←</td> <td style="text-align: center;">200 OK INVITE</td> <td style="text-align: right;">→</td> </tr> <tr> <td style="text-align: right;">←</td> <td style="text-align: center;">ACK</td> <td></td> </tr> </table> User equipment Apply post test routine					INVITE	→	←	100 Trying		←	180 Ringing		←	Re-INVITE requesting MCID		←	200 OK INVITE	→	←	ACK	
	INVITE	→																			
←	100 Trying																				
←	180 Ringing																				
←	Re-INVITE requesting MCID																				
←	200 OK INVITE	→																			
←	ACK																				

### 5.3 Interaction with other services

#### 5.3.1 Explicit Communication Transfer (ECT)

<b>TSS</b> MCID/interaction/ECT	<b>TP</b> MCID_N02_001	<b>MCID reference</b> 4.6.10	<b>Selection expression</b> PICS 4.5.1/2 AND PICS 4.7.1/4																																										
<b>Test purpose</b> <i>MCID request is rejected if a communication is transferred</i> MCID is subscribed in Temporary Mode by the called user and the confirmed communication is set on hold. Ensure that a MCID request is rejected if a communication was transferred before by the called user.																																													
<b>Preconditions:</b> Called user shall be configured with MCID subscription with Temporary Mode																																													
<b>SIP header values:</b> INVITE XML mcid request McidRequestIndicator = 1 HoldingIndicator=<any value>																																													
<b>Comments:</b> <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;"><b>Test equipment (ISC)</b></td> <td style="width: 40%; text-align: center;"><b>AS</b></td> <td style="width: 30%;"><b>Test equipment (Gm)</b></td> </tr> <tr> <td>INVITE 1</td> <td style="text-align: center;">→</td> <td>→ INVITE</td> </tr> <tr> <td>100 Trying</td> <td style="text-align: center;">←</td> <td>← 100 Trying</td> </tr> <tr> <td>180 Ringing</td> <td style="text-align: center;">←</td> <td>← 180 Ringing</td> </tr> <tr> <td>200 OK INVITE</td> <td style="text-align: center;">←</td> <td>← 200 OK INVITE</td> </tr> <tr> <td>ACK</td> <td style="text-align: center;">→</td> <td>→ ACK</td> </tr> <tr> <td>INVITE</td> <td style="text-align: center;">←</td> <td>← INVITE 2 (sendonly)</td> </tr> <tr> <td>200 OK INVITE</td> <td style="text-align: center;">→</td> <td>→ 200 OK INVITE (recvonly)</td> </tr> <tr> <td>ACK</td> <td style="text-align: center;">←</td> <td>← ACK</td> </tr> <tr> <td></td> <td></td> <td>← REFER</td> </tr> <tr> <td></td> <td></td> <td>→ 2xx REFER</td> </tr> <tr> <td></td> <td></td> <td>← INVITE 3</td> </tr> <tr> <td></td> <td></td> <td>→ 488 Not Acceptable Here</td> </tr> <tr> <td></td> <td></td> <td>← ACK</td> </tr> </table> Apply post test routine				<b>Test equipment (ISC)</b>	<b>AS</b>	<b>Test equipment (Gm)</b>	INVITE 1	→	→ INVITE	100 Trying	←	← 100 Trying	180 Ringing	←	← 180 Ringing	200 OK INVITE	←	← 200 OK INVITE	ACK	→	→ ACK	INVITE	←	← INVITE 2 (sendonly)	200 OK INVITE	→	→ 200 OK INVITE (recvonly)	ACK	←	← ACK			← REFER			→ 2xx REFER			← INVITE 3			→ 488 Not Acceptable Here			← ACK
<b>Test equipment (ISC)</b>	<b>AS</b>	<b>Test equipment (Gm)</b>																																											
INVITE 1	→	→ INVITE																																											
100 Trying	←	← 100 Trying																																											
180 Ringing	←	← 180 Ringing																																											
200 OK INVITE	←	← 200 OK INVITE																																											
ACK	→	→ ACK																																											
INVITE	←	← INVITE 2 (sendonly)																																											
200 OK INVITE	→	→ 200 OK INVITE (recvonly)																																											
ACK	←	← ACK																																											
		← REFER																																											
		→ 2xx REFER																																											
		← INVITE 3																																											
		→ 488 Not Acceptable Here																																											
		← ACK																																											

---

# History

<b>Document history</b>		
V5.1.1	October 2012	Publication
V6.1.1	January 2019	Publication