

ETSI TS 137 462 V18.0.0 (2024-05)



**Universal Mobile Telecommunications System (UMTS);
LTE;
5G;
Iuant interface: Signalling transport
(3GPP TS 37.462 version 18.0.0 Release 18)**



Reference

RTS/TSGR-0337462vi00

Keywords

5G,LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	4
1 Scope	5
2 References	5
3 Definitions and abbreviations.....	5
3.1 Definitions	5
3.2 Abbreviations	6
4 Luant data link layer.....	6
4.1 Invalid receptions	6
4.2 Frame lengths	6
4.3 Default address	7
4.4 Window size.....	7
4.5 Message timing	7
4.6 State model.....	7
4.7 Device types	7
4.8 XID negotiation.....	8
4.8.1 HDLC parameters.....	8
4.8.2 Protocol version	8
4.8.3 Address assignment	8
4.8.4 Device scan.....	9
4.8.5 Reset device	9
4.9 Link establishment	10
4.10 Link timeout.....	10
Annex A (informative): HDLC description.....	11
A.1 Basic structure	11
A.2 UNC commands	12
A.2.1 Set Normal Response Mode (SNRM).....	12
A.2.2 Disconnect (DISC).....	12
A.2.3 Unnumbered Acknowledge (UA).....	12
A.2.4 Disconnected Mode (DM)	12
A.2.5 Receiver Ready (RR)	12
A.2.6 Receiver Not Ready (RNR)	12
A.2.7 Information (I)	12
A.2.8 Frame Reject (FRMR)	12
A.3 Option 1.....	13
A.4 Option 4.....	13
A.5 Option 15.1.....	13
A.6 Link safety.....	13
A.7 Full duplex link	13
Annex B (informative): HDLC parameter negotiation.....	15
Annex C (informative): HDLC parameter negotiation example.....	16
Annex D (informative): Address assignment example	17
D.1 Address assignment command.....	17
D.2 Address assignment response	17
Annex E (informative): Device scan example	18
Annex F (informative): Change History	20
History	21

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies the signalling transport related to RETAP and TMAAP signalling to be used across the Iuant interface for UTRAN, E-UTRAN and NG-RAN. In this specification UTRAN, E-UTRAN and NG-RAN are denoted as "RAN", whereas the corresponding network entities Node B, eNB, en-gNB and NG-RAN node are denoted as "RAN Node". The logical Iuant interface is an interface internal to the RAN Node and defined to reside between the implementation specific O&M function and the RET antennas and between the implementation specific O&M function and the TMA control unit function.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] Void
- [2] ISO/IEC 13239 (3rd Edition, 2002-07): "Information Technology – Telecommunications and information exchange between systems – High-level data link control (HDLC) procedures".
- [3] 3GPP TS 37.461: "Iuant Interface: Layer 1".
- [4] Antenna Interface Standards Group: "Control Interface for Antenna Line Devices", Standard No. AISG v2.0.
- [5] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [5] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [5].

ASCII character: A character forming part of the International Reference Version of the 7-bit character set defined in ISO/IEC 646:1991 represented as one octet.

Octet: 8 bits as used in ISO/IEC 13239 [2].

Device type: One octet identifying the type of a device.

Unique ID: A concatenation of the vendor code (2 octets) and a 1 to 17 octets long unit specific code (e.g. serial number) exclusive for each secondary device from the vendor to whom the vendor code is assigned. The vendor code is placed in the left-most (most significant) position of the unique ID. The vendor to whom the vendor code is assigned is responsible for ensuring the uniqueness of the unique ID for each device.

Vendor code: A unique ASCII 2-character code assigned to each vendor in AISG v2.0 [4].

Reset: A process by which the device is put in the state it reaches after a completed power-up.

SecondaryPayloadTransmitLength: The maximum length of the INFO field of an HDLC I-frame in the direction secondary device to primary device.

SecondaryPayloadReceiveLength: The maximum length of the INFO field of an HDLC I-frame in the direction primary device to secondary device.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [5] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [5].

ADDR	Address
ACK	Acknowledgment
CRC	Cyclic Redundancy Check
DISC	Disconnect (frame type)
DM	Disconnected Mode (frame type)
FCS	Frame Checking Sequence
FI	Format Identifier
FRMR	Frame Reject (frame type)
GI	Group Identifier
GL	Group Length
HDLC	High-Level Data Link Control
I	Information (frame type)
ID	Identifier
INFO	Information (field name)
NAK	Non Acknowledgment
NRM	Normal Response Mode
P/F	Poll/Final
PI	Parameter Identifier
PL	Parameter Length
PV	Parameter Value
RET	Remote Electrical Tilting
RETAP	Remote Electrical Tilting Application Part
RNR	Receive Not Ready (frame type)
RR	Receive Ready (frame type)
SNRM	Set Normal Response Mode (frame type)
TMA	Tower Mounted Amplifier
TMAAP	Tower Mounted Amplifier Application Part
TWA	Two Way Alternate
UA	Unnumbered Acknowledgement (frame type)
UNC	Unbalanced Operation Normal Response Mode Class
XID	Exchange ID (frame type)

4 Luant data link layer

The Data Link Layer uses HDLC Class UNC1,15.1 TWA (see 6.10 in ISO/IEC 13239 [2]) according to ISO/IEC 13239 [2].

4.1 Invalid receptions

Frames shall be discarded if a framing error or data overrun occurs.

4.2 Frame lengths

HDLC frame lengths may vary between 4 and N octets.

All secondary devices shall support an N of 78 octets. A secondary device may, after XID negotiation, support a larger N.

4.3 Default address

After reset, a secondary device shall use the no-device address (0x00). While it has the no-device address, it may only respond to device scan and address assignment messages, but any broadcast messages shall be evaluated without response.

4.4 Window size

All devices shall support a window size of 1. A device may, after XID negotiation, support any window size up to 7.

4.5 Message timing

A minimum of 3 ms shall elapse between receiving and transmitting messages.

A secondary device shall, after reception of a command with the P/F bit set, start transmitting a response within 10 ms from the time the final flag octet of that command frame was received.

The transmission of the response shall be finalised within the time $t = n * 10^4 / \text{datarate}$ where n is the number of octets in the response frame including all HDLC framing overhead. The maximum gap time between two consecutive octets shall not exceed the time $t = 3 * 10 / \text{datarate}$. This corresponds to a 25% utilisation of the Data Link Layer.

The data rate is specified in TS 37.461 [3].

4.6 State model

The connection state model for the layer 2 of the secondary device is shown in figure 4.1. The events written in *italic* are procedures from higher levels e.g. link establishment. The HDLC frames that correspond to the events are written in bold as **command / response** messages.

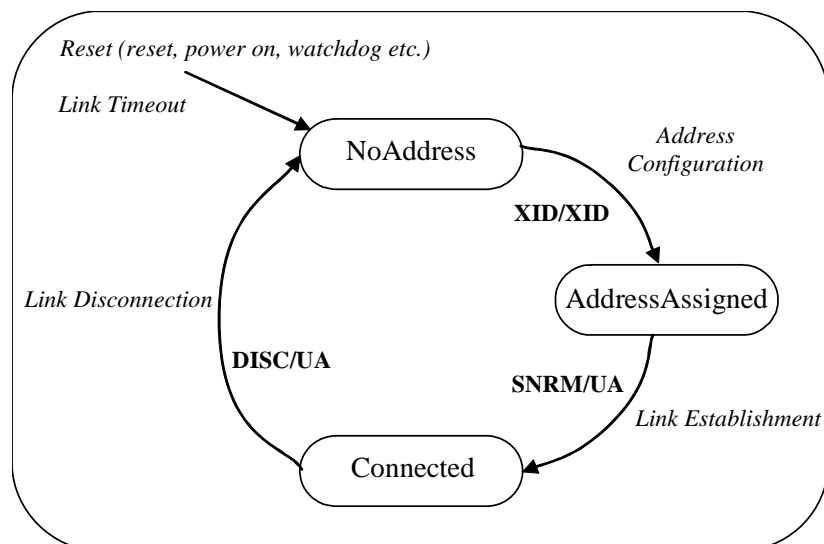


Figure 4.6.1: Connection state model

4.7 Device types

Three device types are defined and identified by the assigned 1-octet unsigned integer code.

Table 4.7.1: Device types and codes

Device Type	1-octet unsigned integer code
Single-Antenna RET Device	0x01
Multi-Antenna RET Device	0x11
Tower mounted amplifier (TMA)	0x02

4.8 XID negotiation

XID negotiation shall use the standard format (see 5.5.3.1-5.5.3.2.3.2 in ISO/IEC 13239 [2]). See Annex B for a brief description of XID negotiation and Annex C to E for examples of XID negotiations. All GL fields have a size of 1 octet.

Any parameter combination of 4.8.1 (HDLC parameter), 4.8.2 (Protocol Version) and 4.8.3 (Address assignment) in an XID command shall be supported by all secondary devices.

4.8.1 HDLC parameters

Format Identifier (FI) shall be 0x81 and Group Identifier (GI) shall be 0x80. All secondary devices shall support the following parameters:

Table 4.8.1.1: HDLC parameters for secondary devices

PI	PL	Description of PV
5	4	Maximum information field length – transmit (bits)
6	4	Maximum information field length – receive (bits)
7	1	Window size – transmit (frames)
8	1	Window size – receive (frames)

The SecondaryPayloadTransmitLength shall be 74 octets by default. It can be increased via XID negotiation, but shall always be 74 octets or larger.

The SecondaryPayloadReceiveLength shall be 74 octets by default. It can be increased via XID negotiation, but shall always be 74 octets or larger.

4.8.2 Protocol version

Format Identifier (FI) shall be 0x81 and Group Identifier (GI) shall be 0xF0. All secondary devices shall support the following parameter:

Table 4.8.2.1: HDLC parameter for protocol version

PI	PL	Description of PV
5	1	3GPP Release ID

4.8.3 Address assignment

The primary device broadcasts the XID commands. The secondary device(s) which match shall respond. The primary shall ensure that only one secondary matches the supplied parameter(s). See below for details.

Format Identifier (FI) shall be 0x81 and Group Identifier (GI) shall be 0xF0. All secondary devices shall support the following parameters:

Table 4.8.3.1: HDLC parameters for address assignment and device scan

PI	PL	Description of PV
1	0 to 19	Unique ID
2	1	HDLC Address
3	0 to 19	Bit Mask (for Unique ID), indicates a device scan
4	1	Device Type (see table 4.7.1)
6	2	Vendor Code as given in AISG v2.0 [4]

The XID message can be used to assign HDLC addresses or to scan for devices.

An address assignment XID command shall contain at least PI=2 (HDLC Address) and shall not contain PI=3 (Bit Mask). During an address assignment all secondary devices first assume a match and then carry out the following steps:

- If PI=1 (Unique ID) is supplied, the right-most PL octets of the secondary devices Unique ID are compared to the Unique ID in the XID command. If they are different, the secondary device does not match, and the message is ignored. If the Unique ID in the XID command is longer than the secondary devices Unique ID, the secondary device does not match, and the message is ignored.
- If PI=4 (Device Type) is supplied, the device type of the secondary device is compared to the device type in the XID command. If they are different, the secondary device does not match, and the message is ignored.
- If PI=6 (Vendor Code) is supplied, the vendor code of the secondary device is compared to the vendor code in the XID command. If they are different, the secondary device does not match, and the message is ignored.

If the secondary device still matches after these steps, the secondary device sets its HDLC address to the address specified in PI=2 and responds with an XID response which contains PI=1 and PI=4.

NOTE: Unlike the normal XID negotiation, in this XID negotiation, the XID response message returns a different set of parameters than the XID command message.

4.8.4 Device scan

The device scan messages may be utilised by the primary to identify all secondary stations in the NoAddress state on an interface .

A device scan XID command shall only contain PI=1 (Unique ID) and PI=3 (Bit Mask), see table 4.8.3.1. PI=1 and PI=3 shall be of equal length PL octets.

If in the NoAddress state, the secondary device masks the $\min(PL,2)$ left-most octets of its own unique ID with the $\min(PL,2)$ left-most octets of the bit mask in the XID command and compares the result with the $\min(PL,2)$ left-most octets the unique ID supplied in the XID command. If they match, the secondary device masks the $\max(0,PL-2)$ right-most octets of its own unique ID with the $\max(0,PL-2)$ right-most octets of the bit mask in the XID command and compares the result with the $\max(0,PL-2)$ right-most octets of the unique ID supplied in the XID command. If they also match, the secondary device transmits an XID response message with its own identification data in the fields PI=1 (complete unique ID), PI=4 (device type) and PI=6 (vendor code).

For the device scan comparison, the unique ID of the secondary device shall be padded with NUL characters (character code 0x00) between the second and third left-most positions to a length of 19 octets.

The scan command with zero length (PL=0) of the Unique ID (PI=1) and the Bit Mask (PI=3) shall match all secondary devices in the NoAddress state.

Only matching secondary devices in the NoAddress state shall respond to the device scan messages.

4.8.5 Reset device

Format identifier (FI) shall be 0x81 and group identifier (GI) shall be 0xF0. All secondary devices shall support the following parameter:

Table 4.8.5.1: HDLC parameters for reset of secondary devices

PI	PL	Description of PV
7	0	Reset device

If the XID command reset device is received as a broadcast (0xFF) by the secondary device, the secondary device shall reset without responding, otherwise the addressed secondary device shall reset after responding.

The reset device parameter shall not be combined with other parameters in an XID command.

NOTE: There is no PV in the XID command Reset device.

4.9 Link establishment

Once the secondary device has been assigned an HDLC address, the primary device initiates the link establishment by sending the SNRM command frame. The secondary device responds with an UA frame and enters the state *Connected*.

4.10 Link timeout

Whenever a secondary device receives an HDLC frame addressed to itself, i.e. not an all-device address (0xFF), it shall restart a 3 minute timer. If this 3 minute timer expires, the secondary device shall be reset.

Annex A (informative): HDLC description

HDLC is defined in ISO/IEC 13239 [2]. This description only covers the aspects of HDLC which are used by this TS.

The HDLC definition “UNC1,15.1, TWA” can be broken down to:

- UNC;
 - The “U” means Unbalanced operation;
 - The “N” means Normal response mode (sequence numbers used in data frames);
 - The “C” means Class.
- Options supported;
 - “1” means use of XID negotiation;
 - “15.1” means use of start/stop transmission with basic transparency;
 - Two Way Alternate (TWA) is the HDLC term for half duplex.

A.1 Basic structure

In unbalanced operation, there is one primary station which controls the bus and a number of secondary stations which only are allowed to transmit when the primary station gives them permission to do so.

All messages are transmitted as frames with the layout shown in table A.1.1:

Table A.1.1: Format of an HDLC frame

Flag 1 octet	ADDR 1 octet	Control 1 octet	INFO N octets	FCS 2 octets	Flag 1 octet
0x7E	Secondary Station Address	Control bits	Variable length	CRC	0x7E

HDLC frames begin and end with a Flag (0x7E) (see A.5 for details).

The transmitting station calculates a Frame Check Sequence (CRC16) on all octets which follow the starting flag but not including the FCS octets. The checksum is transmitted as FCS in little endian order and is followed by the closing flag.

The receiving station calculates the checksum on all octets between the flags. When it finds the closing flag, it compares the checksum to 0xF0B8. If it is a match, the HDLC frame is processed.

The address field contains the HDLC address of the secondary station. If the primary station sends the message, it is called a command and the address field contains the address of the secondary station as destination. If the secondary station sends the message, it is called a response and the address field contains the address of the secondary station as source. Secondary stations cannot communicate directly to each other.

The control field defines one of three frame types:

- I frames contain data as well as a send and receive counter;
- S frames contain a receive counter;
- U frames contain unnumbered commands.

The INFO field is only present in I frames and XID frames. The INFO field in an I frame contains the layer 7 payload.

A.2 UNC commands

According to 6.6.2.1 in ISO/IEC 13239 [2] the following commands in shall be supported in UNC mode:

Table A.2.1: Commands supported in UNC mode

Commands (Primary Station)	Responses (Secondary Station)
Frame type I	Frame type I
Frame type RR	Frame type RR
Frame type RNR	Frame type RNR
Frame type SNRM	Frame type UA
Frame type DISC	Frame type DM
	Frame type FRMR

A.2.1 Set Normal Response Mode (SNRM)

This command is used to set the secondary station in connected mode and reset its sequence number variables.

A.2.2 Disconnect (DISC)

This command is used to terminate the connection.

A.2.3 Unnumbered Acknowledge (UA)

This response is used to confirm that the secondary station received and acted on an SNRM or DISC command.

A.2.4 Disconnected Mode (DM)

This response is used to inform the primary station that the secondary station is disconnected.

A.2.5 Receiver Ready (RR)

This command and response is used to inform the opposite station (primary or secondary) that the transmitting station has empty buffers, i.e. is ready to receive an I frame. This aspect is used for flow control.

It also contains the sequence number of the next frame the transmitting station expects to see. This works both as an ACK and a NAK depending on the value.

A.2.6 Receiver Not Ready (RNR)

Just like RR, except it informs the opposite station that the transmitting station does not have empty buffers, i.e. that it is not ready to receive an I frame. This aspect is used for flow control.

A.2.7 Information (I)

This command and response is used to transfer a block of data together with its sequence number. The command also includes the sequence number of the next frame the transmitting station expects to see. This way, it works as an RR. Like RR, it enables transmission of I frames from the opposite side.

A.2.8 Frame Reject (FRMR)

This response is used to indicate an error condition. The two most likely error conditions are:

- Invalid command;
- Sequence number problem.

The latter is used when the primary station has requested retransmission of a sequence number which it has already acknowledged.

A.3 Option 1

Option 1 means the addition of the XID command/response, which is used for parameter negotiation.

A.4 Option 4

Option 4 means the addition of the UI command/response, which is used to transfer information without changing the sequence numbers used by I frames.

A.5 Option 15.1

Option 15.1 means that the serial link is not synchronous and start/stop flags are used (asynchronous serial link). The flags are coded as 0x7E and basic transparency is used.

This means that all octets between the flags are part of the frame and shall not be transmitted as 0x7E. Since the frame may contain 0x7E, basic transparency is used, which means that 0x7E is transmitted as 0x7D 0x5E and 0x7D is transmitted as 0x7D 0x5D. The receiving station converts back on reception.

All checksum calculations are done on unconverted data.

A.6 Link safety

HDLC provides the upper layer with a safe link between two stations.

Unless excessive frame lengths are used, the CRC16 checksum provides excellent protection against transmission errors. At worst, 10^{-5} of the bit errors will not be detected. The likelihood of an undetected error in a frame can be calculated by multiplying 10^{-5} with the Bit Error Rate (at least 10^{-9} for a reasonable link) and the frame length.

The sequence numbers provide protection against:

- Message duplication;
- Message deletion;
- Message re-ordering.

Without sequence numbers, the protection is only given by a checksum and some sort of ACK.

If the original message is lost, there will be no ACK and a timeout will cause retransmission which solves the problem.

If the original message is not lost, but the ACK is lost, the same timeout will cause a retransmission.

With sequence numbers, the message is retransmitted, but the receiving station sees that the sequence number is the same, i.e. that the message is a retransmission, and throws it away without processing it further. It does send an ACK which informs the transmitting station that the message got through.

A.7 Full duplex link

The upper layer sees the HDLC link as a full duplex link, although the actual transmissions on layer 1 are half duplex. The reason for this is that the upper layer is not aware of any restrictions on transmissions or receptions between layer 2 and layer 1 or between the stations.

Whenever the upper layer wants to transmit, it places a message on the queue to layer 2. The message will not be transmitted until the primary station does a poll.

NOTE: This applies to both the primary and the secondary station.

The same applies to reception. The upper layer will either be told by layer 2 when a message has arrived, or it will periodically check to see if a message has arrived at layer 2. Neither of these two methods will in any way influence the reception of a message. That only depends on when the primary does a poll.

NOTE This still applies to both the primary and the secondary station.

A poll is a command frame from the primary station where the P/F (Poll/Final) bit in the control field is set to 1. This informs the secondary that it is allowed to transmit response frames.

U frames set the P/F bit, which means that they are polls. However, since the U frames used in UNC 1,4 require a specific U frame response, they are not used for I frame transmission, which is what the upper layer messages depend upon.

An I, RR or RNR frame type with the P/F bit set constitutes a poll as used above. An RNR frame prevents transmission of I frames, so it does not really apply.

NOTE: Whenever an I or RR poll occurs, the secondary station may transmit whatever I frame it wishes (as long as the window size is not exceeded, i.e. previous messages have been acknowledged). This means that the secondary station does not have to transmit a reply to a layer 7 instruction. It is free to transmit an alarm instruction, if an alarm has occurred. It is also free to transmit any valid reply to an earlier layer 7 instruction, if it has received (acknowledged) more than one.

Annex B (informative): HDLC parameter negotiation

See also sections 5.5.3.1 – 5.5.3.2.3.2 in ISO/IEC 13239 [2].

Table B.1: Format of XID parameters

FI	GI	GL	PI	PL	PV	PI	PL	PV
----	----	----	----	----	----	----	----	----

XID parameter negotiation uses a specific format (see table C.1) to transfer parameters.

The parameters are identified by a one octet Format Identifier (FI) code and a one octet Group Identifier (GI) code. The Group Length (GL) is a one octet unsigned integer giving the length in octets of the parameters following it.

The parameters are a sequence of PI/PL/PV values. The Parameter Identifier (PI) is a one octet code identifying the parameter. Parameter Length (PL) is a one octet unsigned integer giving the length in octets of the Parameter Value. The parameter order is not defined.

The HDLC parameter negotiation is initiated by the primary station. The primary station transmits an XID frame with the values it suggests. The secondary station can either accept these or lower them. Regardless, it responds with an XID frame with the appropriate values.

Generally this means that the primary station initially uses whatever its maximum limit is for each parameter. If the secondary can accept this, it responds with the same values. If it cannot support that, it lowers the values.

Maximum information field length is a good example. If the primary station suggests using an information field length of 28000 bits (3500 octets), the secondary station can respond with 28000 bits, if it can use that much or even more, or respond with a lower number of e.g. 592 bits (74 octets) if that is its maximum supported information field length.

The same applies to the Release ID. If a release 7 primary station attempts to communicate with a release 6 secondary station, the initial message will suggest release 7 and the response will be release 6.

On the other hand, if a release 6 primary station attempts to communicate with a release 7 secondary station, the initial message will suggest release 6 and the response will release 6.

Regardless, the primary station will have the final decision, since it can refuse to communicate with a station that does not support whatever parameter values it suggests. It can always repeat the XID negotiation with a new value.

Annex C (informative): HDLC parameter negotiation example

XID Frame from primary station:

Table C.1: XID frame from primary station

Field	Content	Description
ADDR	12	Station address
CTRL	XID	Command
FI	0x81	Format identifier
GI	0x80	HDLC Parameter set
GL	18	Length of the parameter field (PI) in octets
PI	5	Maximum I Field length Transmit
PL	4	Length of the PV field in octets
PV	341040	Maximum I Field length Transmit in bits
PI	6	Maximum I Field length Receive
PL	4	Length of the PV field in octets
PV	224000	Maximum I Field length Receive in bits
PI	7	Maximum window size Transmit
PL	1	Length of the PV field in octets
PV	7	Maximum window size Transmit
PI	8	Maximum window size Receive
PL	1	Length of the PV field in octets
PV	3	Maximum window size Receive

Response from secondary station:

Table C.2: XID frame from secondary station

Field	Content	Description
ADDR	12	Station address
CTRL	XID	Command
FI	0x81	Format identifier
GI	0x80	HDLC Parameters set
GL	16	Length of the parameter field in octets
PI	5	Maximum I field length Transmit
PL	2	Length of the PV field (octets)
PV	3200	Maximum I field length Transmit in bits
PI	6	Maximum I field length Receive
PL	4	Length of the PV field (octets)
PV	341040	Maximum I field length Receive in bits
PI	7	Maximum window size Transmit
PL	1	Length of the PV field (octets)
PV	3	Maximum window size Transmit
PI	8	Maximum window size Receive
PL	1	Length of the PV field (octets)
PV	1	Maximum window size Receive

Annex D (informative): Address assignment example

D.1 Address assignment command

Table D.1: Format of the XID frame originated by the primary station

Field	Content	Description
ADDR	0xFF	All-station address (Broadcast)
CTRL	0xBF	XID command
FI	0x81	Format identifier
GI	0xF0	User defined parameter set
GL	0x10	Length of the parameter field (rest of the message) in octets
PI	0x01	Unique ID
PL	0x07	Length of PV field in octets
PV	0x58 0x59 0x7B 0x20 0x41 0x42 0x43	Unique ID of the secondary station
PI	0x02	HDLC address
PL	0x01	Length of PV field in octets
PV	0x17	Assigned HDLC address
PI	0x06	Vendor code as given in AISG v2.0 [4]
PL	0x02	Length of PV field in octets
PV	0x58 0x59	Unique assigned vendor code as given in AISG v2.0 [4] (virtual vendor code "XY" used in this example)

D.2 Address assignment response

Table D.2: Format of Address Assignment Response by the secondary station

Field	Content	Description
ADDR	0x17	HDLC address of the station
CTRL	0xBF	XID command
FI	0x81	Format identifier
GI	0xF0	User defined parameter set
GL	0x0C	Length of parameter field (rest of the message) in octets.
PI	0x01	Unique ID
PL	0x07	Length of PV field in octets
PV	0x58 0x59 0x7B 0x20 0x41 0x42 0x43	Unique ID of the secondary station
PI	0x04	Device type
PL	0x01	Length of PV field in octets
PV	0x01	Device type as defined in table 4.7.1

NOTE: In this address assignment example messages the virtual vendor code "XY", the unique ID 0x58 0x59 0x7B 0x20 0x41 0x42 0x43, the HDLC address 0x17 and the device type 0x01 for a single-antenna device are used.

Annex E (informative): Device scan example

In some situations it may be found that the Unique ID of a bus device is unknown or has been inaccurately recorded. This HDLC command exchange is used by the primary station to perform a binary tree scan of the bus, in order to identify all connected and disconnected devices.

Table E.1: Primary device scan command (XID Frame)

Field	Content	Description
ADDR	0xFF	All-station address (Broadcast)
CTRL	0xBF	XID command
FI	0x81	Format identifier
GI	0xF0	User defined parameter set
GL	0x0A	Length in octets for the rest of the message
PI	0x01	Unique ID
PL	0x03	Length of PV field in octets
PV	0x58 0x11 0x15	Unique ID supplied by the primary station for masked comparison with the unique ID of the secondary station
PI	0x03	Bit mask
PL	0x03	Length of PV field in octets (same as for PI=1)
PV	0xFF 0x17 0xFF	Bit mask to be applied

NOTE: The parameters may occur in any order in the XID command.

Device Scan Response

When each secondary station in the NoAddress state receives the command it masks its Unique ID with the bit mask and compares the result with the Unique ID supplied as described in clause 4.8.4. If they match, the secondary station responds using XID format frame according to table 8 of section 5.5 of ISO/IEC 13239 [2].

Table E.2: Secondary device scan response (XID Frame) in case of a match

Field	Content	Description
ADDR	0x00	No station address
CTRL	0xBF	XID command
FI	0x81	Format identifier
GI	0xF0	User defined parameter set
GL	0x0F	Length in octets for the rest of the message
PI	0x01	Unique ID
PL	0x06	Length of PV field in octets
PV	0x58 0x59 0x07 0x5B 0xCD 0x15	Unique ID of the secondary station
PI	0x06	Vendor code
PL	0x02	Length of PV field in octets
PV	0x58 0x59	Unique assigned vendor code as given in AISG v2.0 [4] (virtual vendor code "XY" is used in this example)
PI	0x04	Device type
PL	0x01	Length of PV field in octets
PV	0x01	Single-antenna RET device type as defined in table 4.7.1

NOTE1: In this device scan example, the virtual vendor code "XY", the unique ID "0x58 0x59 0x07 0x5B 0xCD 0x15", and the device type 0x01 for a single-antenna RET device are used.

NOTE2: The parameters may occur in any order in the response.

It is recommended that the response of individual devices is subject to a random delay (within the permitted response time) to aid collision detection at the primary station.

If there is no response, the primary station knows that no secondary station had those bits in its Unique ID or that the secondary stations having those bits in their unique ID already have assigned addresses, so the tree scan can be truncated at that branch.

If multiple secondary stations respond, the responses might garble each other, unless one secondary station is close enough to overpower the signal from the other(s).

If any response arrives, a single frame, multiple frames or frames with incorrect checksums or framing errors, the branch of the tree is inhabited.

Annex F (informative): Change History

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-02	R3-103	R3-190095				Text transferred from 25.462 v15.0.0 (changes shown with rev marks)	1.15.0
2019-04	RAN#83	RP-190598				Specification approved by RAN plenary	15.1.0
2019-12	RP-86	RP-192915	0001	6	F	Correction for luant	15.2.0
2020-07	RAN#88-e	-	-	-	-	Update to Rel-16 version (MCC)	16.0.0
2022-03	RAN#95-e	RP-220238	0002	1	D	Inclusive language review	17.0.0
2024-03	RAN#103	RP-240617	0004	-	D	Rapporteur Editorial Review	18.0.0

History

Document history		
V18.0.0	May 2024	Publication