# ETSI TS 102 012 V1.1.1 (2001-11)


Technical Specification

Digital Enhanced Cordless Telecommunications (DECT);

DECT Packet Radio Service (DPRS);

Application Specific Access Profile (ASAP): V.24 Interworking;

Profile Test Specification (PTS)

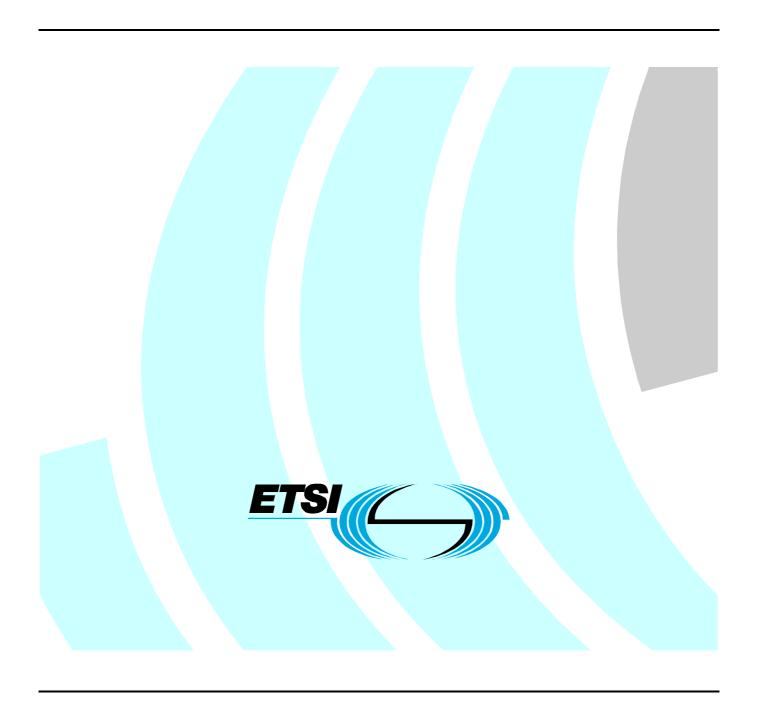

#### Reference

#### DTS/DECT-040183

Keywords

data, DECT, DPRS, interoperability, PTS, TCL, testing

#### **ETSI**

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

#### Important notice

Individual copies of the present document can be downloaded from: <u>http://www.etsi.org</u>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<a href="http://portal.etsi.org/tb/status/status.asp">http://portal.etsi.org/tb/status/status.asp</a></a>

If you find errors in the present document, send your comment to: editor@etsi.fr

#### **Copyright Notification**

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001. All rights reserved.

# Contents

Intell	ectual Property Rights	5
Forev	word	5
1	Scope	<i>6</i>
2	References	
3	Definitions and abbreviations	
3.1	Definitions	
4	V.24 access ASAP	
4.1 4.2	Test architecture	
4.2	Test mode	
4.4	Relevant test cases	
4.4.1	Test cases condition	
4.4.2	Test cases contents	
4.4.3	Application behaviour	9
4.4.4	NWK layer procedures	
4.4.5	DLC layer procedures	
4.4.6	MAC layer procedures	
4.4.7 4.5	Management entity procedures	
4.5	Additional test cases of procedures	11
Anne	ex A (normative): Profile Implementation eXtra Information for Testing (IXIT)	
	proforma	12
A.1	Identification summary	12
A.2	Test summary	12
A.3	Test laboratory	12
A.4	Client identification	13
A.5	SUT	13
A.6	Protocol layer information	
A.6.1	Protocol identification	
A.6.2	IUT information	
11.0.2		
Anne	ex B (normative): Profile Conformance Test Report (Profile CTR) proforma	17
B.1	Identification summary	17
B.1.1	Protocol conformance test report	17
B.1.2	IUT identification	
B.1.3	Testing environment	
B.1.4	Limits and reservation	
B.1.5	Comments	
B.2	IUT conformance status	18
B.3	Static conformance summary	19
B.4	Dynamic conformance summary	19
B.5	Static conformance review report.	19
B.6	Test campaign report	20
B.7	Observations	20

Annex C (normative): System Conformance Test Report (SCTR) proforma		21
C.1	Identification summary	21
C.1.1	System conformance test report	
C.1.2	Test laboratory	
C.1.3	Client identification	
C.1.4	System Under Test (SUT)	
C.1.5	Profile identification	
C.1.6	Nature of conformance testing	23
C.1.7	Limits and reservations	
C.1.8	Record of agreement	
C.1.9	Comments	
C.2	System report summary	24
C.2.1	Profile testing summary	24
C.2.1.	.1 Physical Layer	24
C.2.1.	2 MAC layer	25
C.2.1.	3 DLC layer	26
C.2.1.	4 NWK layer	27
Anne	ex D (normative): System Conformance Statement (V.24) proforma	28
D.1	Identification summary	28
D.1.1	SCS identification	
D.1.2	IUT identification	28
D.1.3	Client identification	29
D.1.4	Supplier identification	29
D.1.5	Manufacturer identification	30
D.1.6	Protocols identification	30
D.1.7	Profile identification	30
D.2	Miscellaneous system information	31
D.2.1	Configuration	31
D.2.2	Other information	31
Histor	ry	32

# Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

#### **Foreword**

This Technical Specification (TS) has been produced by ETSI Project Digital Enhanced Cordless Telecommunications (DECT).

#### 1 Scope

The present document contains the test specification for DECT Packet Radio Services (DPRS), V.24 ASAP.

The objective of this test specification is to provide a basis to test DECT equipments giving a high probability of inter-operability between different manufacturer's DECT equipment.

The ISO standard for the methodology of conformance testing (ISO/IEC 9646-1 [16] and ISO/IEC 9646-2 [17] as well as the ETSI rules for conformance testing (ETS 300 406 [15]) are used as a basis for the test methodology.

Annex A provides the Profile Implementation eXtra Information for Testing (IXIT) proforma.

Annex B provides the Profile Conformance Test Report (Profile CTR) proforma.

Annex C provides the System Conformance Test Report (SCTR) proforma.

Annex D provides the System Conformance Statement (SCS) proforma.

#### References 2

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- a the letest war

• For a non-specific reference, the latest version applies.		
[1]	ETSI EN 300 175-1: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 1: Overview".	
[2]	ETSI EN 300 175-2: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 2: Physical Layer (PHL)".	
[3]	ETSI EN 300 175-3: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 3: Medium Access Control (MAC) layer".	
[4]	ETSI EN 300 175-4: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 4: Data Link Control (DLC) layer".	
[5]	ETSI EN 300 175-5: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 5: Network (NWK) layer".	
[6]	ETSI EN 300 175-6: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 6: Identities and addressing".	
[7]	ETSI EN 300 175-7: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 7: Security features".	

[8] ETSI EN 300 175-8: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 8: Speech coding and transmission".

ETSI EN 300 444: "Digital Enhanced Cordless Telecommunications (DECT); Generic Access [9] Profile (GAP)".

[10] ETSI TS 101 947: "Digital Enhanced Cordless Telecommunications (DECT); DECT Packet Radio Service (DPRS); Application Specific Access Profile (ASAP): V.24 Interworking".

ETSI EN 301 649: "Digital Enhanced Cordless Telecommunications (DECT); DECT Packet [11] Radio Services (DPRS)".

[12]	ETSI TS 101 950: "Digital Enhanced Cordless Telecommunications (DECT); DECT Packet Radio Service (DPRS); Interoperability Test Specification".
[13]	ETSI TS 102 011-1: "Digital Enhanced Cordless Telecommunications (DECT); DECT Packet Radio Service (DPRS); Application Specific Access Profile (ASAP): V.24 Interworking; Profile Implementation Conformance Statement (ICS); Part 1: Portable radio Termination (PT)".
[14]	ETSI TS 102 011-2: "Digital Enhanced Cordless Telecommunications (DECT); DECT Packet Radio Service (DPRS); Application Specific Access Profile (ASAP): V.24 Interworking; Profile Implementation Conformance Statement (ICS); Part 2: Fixed radio Termination (FT)".
[15]	ETSI ETS 300 406: "Methods for Testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".
[16]	ISO/IEC 9646-1 (1991): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 1: General concepts".
[17]	ISO/IEC 9646-2 (1991): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 2: Abstract Test Suite Specification".
[18]	ISO/IEC 9646-3 (1991): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 3: The Tree and Tabular Combined Notation (TTCN)".
[19]	ISO/IEC 9646-5 (1991): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 5: Requirements on test laboratories and clients for the conformance assessment process".
[20]	ISO/IEC 9646-6 (1991): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 6: Protocol profile test specification".
[21]	ISO/IEC 9646-7 (1991): "Information technology; Open Systems Interconnection; Conformance testing methodology and framework; Part 7: Implementation Conformance Statement".

# 3 Definitions and abbreviations

#### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in ISO/IEC 9646-7 [21] and in TS 101 950 [12] apply.

#### 3.2 Abbreviations

For the purposes of the present document, the abbreviations defined in ISO/IEC 9646-1 [16], ISO/IEC 9646-6 [20], ISO/IEC 9646-7 [21], and in TS 101 950 [12], and the following apply:

C<sub>F</sub> higher layer signalling Channel (Fast)
C<sub>S</sub> higher layer signalling Channel (Slow)

DECT Digital Enhanced Cordless Telecommunications

DLC Data Link Control

DPRS DECT Packet Radio Service
FT Fixed radio Termination
GAP Generic Access Profile

GF higher layer information control channel - a logical channel to the MAC layer

IUT Implementation Under Test MAC Medium Access Control

NWK NetWorK

OSI Operating System Identification
PCTR Protocol Conformance Test Report

PHL PHysical Layer

PICS Protocol Implementation Conformance Statement

PSTS Profile Specific Test Specification
PT Portable radio Termination

SAP Service Access Point

SCS System Conformance Statement

SUT System Under Test

U-plane User-plane

### 4 V.24 access ASAP

#### 4.1 Test architecture

The test architecture for DPRS interoperability testing is defined in TS 101 950 [12], clause 4.1, and is relevant for this profile.

# 4.2 Test configurations

The test configurations for DPRS interoperability testing are defined in TS 101 950 [12], clause 4.2, and is relevant for this profile.

#### 4.3 Test mode

The test mode for DPRS interoperability testing is defined in TS 101 950 [12], clause 4.3, and is relevant for this profile.

#### 4.4 Relevant test cases

#### 4.4.1 Test cases condition

The test case list in table 1 identifies all possible test cases for testing, as defined in TS 101 950 [12], clause 6. A status is assigned to each test case in order to indicate these test cases, which are mandatory to execute.

**Table 1: Test Case condition** 

Nr.	Test Case Name	Status
01	Subscription	M
02	Outgoing call	M
03	Incoming call	0
04	Switch On	M
05	Desubscribe	M
06	Connection bandwidth control	C101
07	Suspend/Resume	M
80	Send/Receive U-plane data	M
09	Behaviour at the edge of range, in noisy environment and Interferer tests	M
10	Multicell behaviour	M
11	Speech & Data in parallel or several Data connections in parallel	C102
12	V.24 procedures	M
13	Ethernet procedures	I
14	Encryption	M
15	Quality of service from applications point of view	0
16	Quality of service from users point of view	0
C101:	IF In call service change supported THEN m ELSE i.	
C102:	IF Multi bearer Physical connection setup supported THEN m ELSE i.	

# 4.4.2 Test cases contents

**Table 2: Test Case contents** 

Nr.	App. behaviour	NWK Procedure	DLC Procedure	MAC Procedure	Mgt. Procedure
01	01	01, 03, 04, 05, 06, 08, 09, 20	02, 03, 08, 09, 10, 11	01, 02, 03, 05, 07, 13, 14, 15	-
02	02	10, 12, 17, 19	-	02, 03, 04, 05, 06, 07, 08, 13, 14, 15	-
03	02	02, 10, 13, 14, 19	-	02, 03, 04, 05, 06, 07, 08, 09, 13, 14, 15	-
04	03	05, 08, 09	-	-	-
05	04	07, 11	-	-	-
06	05	15	-	02, 03, 04, 05, 06, 08, 15, 16	01
07	06	09	-	05, 06, 08, 09, 15, 16	02, 03, 04
08	06	10	01, 04, 05, 06	05, 06, 08, 15, 16, 17	01
09	02	-	01, 04, 05, 06	10, 15	-
10	02	-	07	-	-
11	07	-	-	-	01
12	02	10	-	-	-
13	08	10	-	-	-
14	02	16	-	11, 12	-
15	09	-	-	-	-
16	10	-	-	-	-

# 4.4.3 Application behaviour

Table 3: Application behaviour

Nr.	Behaviour		
01	Subscription registration user procedure on air		
02	Application data transmission		
03	-		
04	Terminate access rights user procedure		
05	Application data transmission with a variable throughput		
06	Application data transmission with big throughputs, small throughputs and delay between the throughputs		
07	At least one of the following scenarios:		
	Scenario 1: Two Application data transmissions shall be performed in parallel		
	Scenario 2: An Application data transmission and a voice call shall be performed in parallel		
8	Application data transmission, which varies the packet size		
9	See PIXIT table A.7 item 41		
10	See PIXIT table A.7 item 42		

# 4.4.4 NWK layer procedures

**Table 4: NWK layer procedures** 

Nr.	NWK layer procedures
01	Direct PT initiated link establishment
02	Indirect FT initiated link establishment
03	Obtain access rights
04	Key allocation
05	Location registration
06	Authentication of PT
07	Authentication of FT
80	Terminal capability indication
09	Dynamic parameters allocation
10	Call Resources/Parameters negotiation
11	FT terminating access rights
12	From Outgoing call request to Outgoing call connection
13	From Incoming call request to Incoming call connection
14	PT alerting
15	Bandwidth change
16	Cipher-switching initiated by FT
17	Outgoing call V.24
18	Outgoing call Ethernet
19	Call release
20	Link release

# 4.4.5 DLC layer procedures

**Table 5: DLC layer procedures** 

Nr.	DLC layer procedures		
01	U-plane transmission class 2		
02	Class A link establishment		
03	Class A acknowledged information transfer		
04	FU10a frame operation		
05	FU10b frame operation		
06	FU10c frame operation		
07	Class A connection handover		
80	CS-channel fragmentation and recombination		
09	CF-channel fragmentation and recombination		
10	Selection of logical channels (CS and CF)		
11	Class A link release		

# 4.4.6 MAC layer procedures

Table 6: MAC layer procedures

Nr.	MAC layer procedures	
01	Downlink broadcast	
02	Logical connection setup	
03	Single bearer Physical connection setup	
04	Multi bearer Physical connection setup	
05	Single duplex bearer setup	
06	Double simplex bearer setup	
07	CS/CF Channel Data	
80	Connection modification	
09	Paging	
10	Bearer replacement	
11	Encryption process - initialization and synchronization	
12	Encryption mode control	
13	Logical connection release	
14	Physical connection release	
15	Unacknowledged bearer release	
16	Fast bearer release	
17	GF Channel Data	

# 4.4.7 Management entity procedures

**Table 7: Management entity procedures** 

Nr.	Management entity procedures	
01	Dynamic bandwidth management	
02	Suspend management	
03	Resume management	
04	Stay alive	

# 4.5 Additional test cases or procedures

Neither additional test cases nor procedures are provided for the purpose of this profile.

# Annex A (normative): Profile Implementation eXtra Information for Testing (IXIT) proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PIXIT proforma in this annex so that it can be used for its intended purposes and may further publish the completed PIXIT.

The Profile IXIT Proforma is based on ISO/IEC 9646-6 [20]. Any needed additional information can be found in this international standard document.

# A.1 Identification summary

#### Table A.1

PIXIT Number:	
Test Laboratory Name:	
Date of Issue:	
Issued to:	

# A.2 Test summary

#### Table A.2

Protocol Specification:	
Protocol to be tested:	
Test Specification:	
Abstract Test Method:	

# A.3 Test laboratory

#### Table A.3

Test Laboratory Identification:	
Test Laboratory Manager:	
Means of Testing:	
SAP Address:	

# A.4 Client identification

#### Table A.4

Client Identification:	
Client Test manager:	
Test Facilities required:	

# A.5 SUT

#### Table A.5

Name:	
Version:	
SCS Number:	
Machine configuration:	
Operating System Identification:	
IUT Identification:	
PICS Reference for IUT:	
Limitations of the SUT:	
Environmental Conditions:	

# A.6 Protocol layer information

# A.6.1 Protocol identification

#### Table A.6

Name:	
Version:	
PICS References:	

# A.6.2 IUT information

Table A.7

forced to invoke an outgoing call?    New could the IUT_1 (PT) be forced to release a call?   followed to release a call?   followed to release a call?   forced to initiate the following procedures:   Logical connection setup, Single bearer Physical connection setup, bearer Physical connection setup, bearer Physical connection setup, bearer Physical connection setup, and Single duplex bearer setup?   forced to initiate the following procedures:   Logical connection setup, bearer Physical connection setup, and Single duplex bearer setup?   forced to initiate the following procedures:   Logical connection setup, single bearer Physical connection setup, single bearer Physical connection setup, sand Single duplex bearer setup?   forced to initiate the following procedures:   Logical connection setup, and Single duplex bearer setup?   forced to initiate the following procedures:   Logical connection setup, and Single duplex bearer setup?   forced to initiate the following procedures:   Logical connection setup, and Symmetric connection?   Logical connection setup, and Symmetric connection?   Logical connection setup, and Symmetric connection?   Logical connection setup, and Symmetric connections setup, and Asymmetric connection setup, and Asymmetric connection setup, and Asymmetric connection setup, and Asymmetric connection?   Logical connection for the bearers sused in an asymmetric multibearer connection?   Logical connection of the bearers sused in an asymmetric multibearer connection?   Logical connection of the bearers sused in an asymmetric multibearer connection?   Logical connection for the bearers sused in an asymmetric multibearer connection?   Logical connection for the bearers sused in an asymmetric multibearer connection?   Logical connection for the bearers sused in an asymmetric multibearer connection?   Logical connection for the bearer	Item	Question	Explanation	Answer
start outgoing call.  How could the IUT_1 (PT) be forced to release a call?  How could the IUT_1 (PT) be forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  How could the IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  How could the IUT_1 (PT) or lindicates the steps that have to be forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  How could the IUT_1 (PT) or lindicates the steps that have to be forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, bearer Physical connection setup, bearer Physical connection setup, and Symmetric connection?  How could the IUT_1 (PT) or lindicates the steps that have to be forced to initiate a box bearer setup?  Indicates the steps that have to be followed to initiate the following procedures: Logical connection setup, Single bearer setup.  Indicates the steps that have to be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  Indicates the steps that have to be forced to initiate a Double simplex bearer setup.  Indicates the steps that have to be forced to initiate a MAC suspend?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the	1	How could the IUT_1 (PT) be		
Now could the IUT_1 (PT) be   Indicates the steps that have to be   forced to initiate the following procedures:   Logical connection setup, Single   bearer Physical connection setup, Single   Single duplex bearer setup. Single   Single setup   Single		forced to invoke an outgoing call?		
forced to release a call.  How could the IUT_1 (PT) be forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  How could the IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup.  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection.  How could the IUT_1 (PT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Asymmetric connection.  How could the IUT_1 (PT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Asymmetric connection.  How could the IUT_1 (PT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Asymmetric connection?  How could the IUT_1 (PT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Asymmetric connection?  How could the IUT_1 (PT) be forced to initiate and the following procedures:  How could the IUT_1 (PT) be forced to initiate and forcedures.  How could the IUT_1 (PT) be forced to initiate and forcedures.  How could the IUT_1 (PT) be forced to initiate and forcedures.  How could the IUT_1 (PT) be forced to initiate and forcedures.  How could the IUT_1 (PT) be forced to initiate and forcedures.  How could the IUT_1 (PT) be forced to initiate and fo				
How could the IUT_1 (PT) be forced to initiate the following procedures:	2			
forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  How could the IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  How could the IUT_1 (PT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  How could the IUT_1 (PT) be forced to initiate the followed to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  How could the IUT_1 (PT) be forced to initiate a Double simplex series setup procedure?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to initiate a MAC suspend procedures.  How could the IUT_2 (FT) be forced to initiate a MAC suspend procedures.  How could the IUT_2 (FT) be forced to initiate a MAC suspend procedures.  How could the IUT_2 (FT) be forced to initiate a MAC resume procedure.  How could the IUT_1 (PT) be forced to initiate a MAC resume procedure.  How could the IUT_1 (PT) be forced to initiate a MAC resume procedure.  How could the IUT_1 (PT) be forced to initiate a MAC resume procedure.  How could the IUT_1 (PT) be forced to initiate a MAC resume procedure.  How could the IUT_1 (PT) be for				
Drocedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?	3			
Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  How could the IUT_2 (FT) be forced to initiate the following procedures:  Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures:  Logical connection setup, Multi bearer Physical connection setup, and Single duplex bearer setup?  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures:  Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures:  Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures:  Logical connection setup, Multi bearer Physical connection setup, Multi bearer Stupp in Concedure?  How could the IUT_1 (PT) be forced to initiate a Double simplex bearer setup procedure?  How could the IUT_2 (PT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to initiate a MAC suspend procedures.  How could the IUT_1 (PT) be forced to initiate a MAC suspend procedures.  How could the IUT_2 (FT) be forced to initiate a MAC suspend procedures.  How could the IUT_2 (FT) be forced to initiate a MAC resumer?  How could the IUT_1 (PT) be forced to initiate a MAC resumer?  How could the IUT_1 (PT) be forced to initiate a MAC resumer?  How could the IUT_1 (PT) be forced to initiate a MAC resumer?  How could the IUT_1 (PT) be forced to initiate a MAC resumer?  How could the IUT_1 (PT) be forced to initiate		ı		
bearer Physical connection setup, and Single duplex bearer setup.  4 How could the IUT_2 (FT) be forced to initiate the following procedures:     Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  5 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures:     Logical connection setup, Multi bearer Physical connection setup, and Single duplex bearer setup?  5 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures:     Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures:     Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection.  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures:     Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection.  7 How could the IUT_1 (PT) be forced to initiate a Double simplex bearer setup procedure?  8 How could the IUT_1 (PT) be forced to reverse the direction of the bearer sused in an asymmetric multibearer connection?  9 How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  10 How could the IUT_2 (FT) be forced to initiate the followed to reverse the direction of the bearers used in an asymmetric multibearer connection?  11 How could the IUT_2 (FT) be forced to initiate a MAC suspend?  12 How could the IUT_2 (FT) be forced to initiate a MAC suspend?  13 How could the IUT_2 (FT) be forced to initiate a MAC suspend?  14 How could the IUT_1 (PT) be forced to initiate a MAC resume?  15 How could the IUT_1 (PT) be forced to initiate a MAC resume?  16 How could the IUT_1 (PT) be forced to initiate a MAC resume?  17 How could the IUT_1 (PT) be forced to initiate a bacer replacement procedures.  18 How could the IUT_1 (PT) be forced to initiate a MAC resume?  19 How could the IUT				
and Single duplex bearer setup?  4 How could the IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  5 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Single duplex bearer setup?  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Asymmetric connection?  7 How could the IUT_1 (PT) be forced to initiate the following procedures: Logical connection setup, Multi bearer setup procedure?  8 How could the IUT_1 (PT) be forced to reverse the direction of the bearers setup procedure?  9 How could the IUT_1 (PT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  10 How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  11 How could the IUT_2 (FT) be forced to initiate a MAC suspend?  12 How could the IUT_1 (PT) be forced to initiate a MAC suspend?  13 How could the IUT_1 (PT) be forced to initiate a MAC resurne?  14 How could the IUT_1 (PT) be forced to initiate a MAC resurne?  15 How could the IUT_1 (PT) be forced to initiate a bacarer replacement procedures.  16 How could the IUT_1 (PT) be forced to initiate a bacarer replacement procedures.  17 How could the IUT_1 (PT) be forced to initiate a bacarer replacement procedures.  18 How could the IUT_1 (PT) be forced to initiate a bacarer replacement procedures?  19 How could the IUT_1				
4 How could the IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  5 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Single duplex bearer setup?  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Asymmetric connection?  7 How could the IUT_1 (PT) be forced to initiate the following procedures:  8 How could the IUT_1 (PT) be forced to initiate and initia				
forced to initiate the following procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup.  5 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, Multi bearer Physical connection setup, Multi bearer Physical connection setup, and Symmetric connection.  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection.  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Asymmetric connection?  7 How could the IUT_1 (PT) be forced to initiate a Double simplex bearer setup procedure?  8 How could the IUT_1 (PT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  9 How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  10 How could the IUT_2 (FT) be forced to switch a connection for locates the steps that have to be forced to switch a connection for locates the steps that have to be forced to switch a connection for locates the steps that have to be forced to initiate a MAC suspend?  12 How could the IUT_1 (PT) be forced to initiate a MAC suspend?  13 How could the IUT_1 (FT) be forced to initiate a MAC resume?  14 How could the IUT_1 (FT) be forced to initiate a MAC resume?  15 How could the IUT_1 (FT) be forced to initiate a bearer replacement procedure?  16 How could the IUT_1 (FT) be forced to initiate a bearer replacement procedure?  17 How could the IUT_1 (FT) be forced to initiate a bearer replacement procedure?  18 How could the IUT_1 (FT) be forced to initiate a bearer replacement procedure?  19 How could the IUT_1 (FT) be forced to initiate a bearer replacement procedure?  10 How could the IUT_1 (FT) be forced to initiate a MA	4			
procedures: Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  5 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  7 How could the IUT_1 (PT) be forced to initiate a Double simplex bearer setup procedures?  8 How could the IUT_1 (PT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  9 How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  10 How could the IUT_2 (FT) be forced to switch a connection for clear mode to encrypt mode?  11 How could the IUT_2 (FT) be forced to initiate a MAC suspend?  12 How could the IUT_2 (FT) be forced to initiate a MAC suspend?  13 How could the IUT_1 (PT) be forced to initiate a MAC resume?  14 How could the IUT_1 (PT) be forced to initiate a MAC resume?  15 How could the IUT_1 (PT) be forced to initiate a MAC resume?  16 How could the IUT_1 (FT) be forced to initiate a MAC resume?  17 How could the IUT_1 (PT) be forced to initiate a MAC resume?  18 How could the IUT_1 (PT) be forced to initiate a MAC resume?  19 How could the IUT_1 (PT) be forced to initiate a MAC resume?  10 How could the IUT_1 (PT) be forced to initiate a MAC resume?  11 How could the IUT_1 (PT) be forced to initiate a MAC resume?  12 How could the IUT_1 (PT) be forced to initiate a MAC resume?  13 How could the IUT_1 (PT) be forced to initiate a MAC resume?  14 How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  15 How could the IUT_1 (PT) be forced to initiate a MAC resume?  16 How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  17 How could the IUT_1 (PT) be forced to initiate a MAC re	'			
Logical connection setup, Single bearer Physical connection setup, and Single duplex bearer setup?  5 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection.  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Asymmetric connection.  7 How could the IUT_1 (PT) be forced to initiate a Double simplex bearer setup procedure?  8 How could the IUT_1 (PT) be forced to reverse the direction of the bearers used in an asymmetric timultibearer connection?  9 How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  10 How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  11 How could the IUT_1 (PT) be forced to initiate a MAC suspend forced to initiate a MAC suspend?  12 How could the IUT_1 (PT) be forced to initiate a MAC resume?  13 How could the IUT_1 (PT) be forced to initiate a MAC resume?  14 How could the IUT_1 (PT) be forced to initiate a MAC resume?  15 How could the IUT_1 (PT) be forced to initiate a MAC resume?  16 How could the IUT_1 (PT) be forced to initiate a MAC resume?  17 How could the IUT_1 (PT) be forced to initiate a MAC resume?  18 How could the IUT_1 (PT) be forced to initiate a MAC resume?  19 How could the IUT_1 (PT) be forced to initiate a MAC resume?  10 How could the IUT_1 (PT) be forced to initiate a MAC resume?  11 How could the IUT_1 (PT) be forced to initiate a MAC resume?  12 How could the IUT_1 (PT) be forced to initiate a MAC resume?  13 How could the IUT_1 (PT) be forced to initiate a MAC resume?  14 How could the IUT_1 (PT) be forced to initiate a MAC resume?  15 How could the IU		•		
and Single duplex bearer setup.  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection.  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Asymmetric connection?  How could the IUT_1 (PT) be forced to initiate a Double simplex bearer setup procedures:  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_1 (PT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume procedures.  How could the IUT_2 (FT) be forced to initiate a MAC resume procedures.  How could the IUT_1 (PT) be forced to initiate a MAC resume procedures.  How could the IUT_1 (PT) be forced to initiate a MAC resume procedures.  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?		Logical connection setup, Single		
How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the followed to initiate the following procedures:     Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?				
IUT_2 (FT) be forced to initiate the following procedures:   Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection.		and Single duplex bearer setup?	and Single duplex bearer setup.	
following procedures: Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, Multi bearer setup procedures:  8 How could the IUT_1 (PT) be forced to reverse the direction of the bearers sused in an asymmetric multibearer connection?  9 How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  10 How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  11 How could the IUT_1 (PT) be forced to initiate a MAC suspend?  12 How could the IUT_1 (PT) be forced to initiate a MAC suspend?  13 How could the IUT_2 (FT) be forced to initiate a MAC resume?  14 How could the IUT_2 (FT) be forced to initiate a MAC resume?  15 How could the IUT_1 (PT) be forced to initiate a MAC resume?  16 How could the IUT_1 (PT) be forced to initiate a MAC resume?  17 How could the IUT_1 (PT) be forced to initiate a MAC resume?  18 How could the IUT_1 (PT) be forced to initiate a MAC resume?  19 How could the IUT_1 (PT) be forced to initiate a MAC resume?  10 How could the IUT_1 (PT) be forced to initiate a MAC resume?  11 How could the IUT_1 (PT) be forced to initiate a MAC resume?  12 How could the IUT_1 (PT) be forced to initiate a MAC resume?  13 How could the IUT_1 (PT) be forced to initiate a MAC resume?  14 How could the IUT_1 (PT) be forced to initiate a MAC resume?  15 How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  16 How could the IUT_1 (PT) be forced to init	5			
Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection?  6 How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures:     Logical connection setup, Multi bearer Physical connection setup, and Symmetric connection setup, and Asymmetric connection?  7 How could the IUT_1 (PT) be forced to initiate a Double simplex bearer setup procedure?  8 How could the IUT_1 (PT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  9 How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  10 How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  11 How could the IUT_1 (PT) be forced to initiate a MAC suspend?  12 How could the IUT_2 (FT) be forced to initiate a MAC suspend?  13 How could the IUT_1 (PT) be forced to initiate a MAC resume?  14 How could the IUT_2 (FT) be forced to initiate a MAC resume?  15 How could the IUT_1 (PT) be forced to initiate a MAC resume?  16 How could the IUT_1 (PT) be forced to initiate a MAC resume?  17 How could the IUT_1 (PT) be forced to initiate a MAC resume?  18 How could the IUT_1 (PT) be forced to initiate a MAC resume?  19 How could the IUT_2 (FT) be forced to initiate a MAC resume?  10 How could the IUT_2 (FT) be forced to initiate a MAC suspend?  11 How could the IUT_2 (FT) be forced to initiate a MAC suspend?  12 How could the IUT_2 (FT) be forced to initiate a MAC resume?  13 How could the IUT_2 (FT) be forced to initiate a MAC resume?  14 How could the IUT_1 (PT) be forced to initiate a MAC resume?  15 How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  16 How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?				
bearer Physical connection setup, and Symmetric connection?  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures: Logical connection setup, Multi bearer Physical connection setup, and Asymmetric connection:  How could the IUT_1 (PT) be forced to initiate a Double simplex bearer setup procedure.  How could the IUT_1 (PT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume procedures.  Indicates the steps that have to be forced to initiate a MAC resume procedure.  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a MAC resume?  Indicates the steps that have to be forced to initiate a bearer replacement procedure?  Indicates the steps that have to be forced to i				
and Symmetric connection?  How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the followed to initiate a Double simplex bearer setup procedure?  Between the forced to initiate a Double simplex bearer setup procedure?  Between the forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection.  Indicates the steps that have to be followed to reverse the direction of the bearers used in an asymmetric multibearer connection.  Indicates the steps that have to be followed to reverse the direction of the bearers used in an asymmetric multibearer connection.  Indicates the steps that have to be followed to reverse the direction of the bearers used in an asymmetric multibearer connection.  Indicates the steps that have to be followed to reverse the direction of the bearers used in an asymmetric multibearer connection.  Indicates the steps that have to be followed to initiate a FT initiated cipher-switching procedure.  Indicates the steps that have to be forced to initiate a MAC suspend?  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the s				
How could the IUT_1 (PT) or IUT_2 (FT) be forced to initiate the following procedures:   Logical connection setup, Multibearer Physical connection?   Asymmetric connection?   and Asymmetric connection?   Indicates the steps that have to be forced to initiate a Double simplex bearer setup procedure.   Indicates the steps that have to be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?   Indicates the steps that have to be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?   Indicates the steps that have to be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?   Indicates the steps that have to be forced to reverse the direction of the bearers used in an asymmetric multibearer connection.   Indicates the steps that have to be forced to switch a connection from clear mode to encrypt mode?   Indicates the steps that have to be forced to initiate a MAC suspend?   Indicates the steps that have to be forced to initiate a MAC suspend?   Indicates the steps that have to be forced to initiate a MAC suspend?   Indicates the steps that have to be forced to initiate a MAC suspend?   Indicates the steps that have to be forced to initiate a MAC suspend?   Indicates the steps that have to be forced to initiate a MAC resume?   Indicates the steps that have to be forced to initiate a MAC resume?   Indicates the steps that have to be forced to initiate a MAC resume?   Indicates the steps that have to be forced to initiate a MAC resume?   Indicates the steps that have to be forced to initiate a MAC resume procedures.   Indicates the steps that have to be forced to initiate a MAC resume procedures.   Indicates the steps that have to be forced to initiate a Baerer replacement procedure?   Indicates the steps that have to be followed to initiate a Baerer replaceme				
IUT_2 (FT) be forced to initiate the following procedures:   Logical connection setup, Multi bearer Physical connection setup, and Asymmetric connection?	6			
following procedures: Logical connection setup, Multi bearer Physical connection?  How could the IUT_1 (PT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection.  How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  To How could the IUT_2 (FT) be forced to initiate a MAC suspend?  Indicates the steps that have to be followed to reverse the direction of the bearers used in an asymmetric multibearer connection.  Indicates the steps that have to be followed to reverse the direction of the bearers used in an asymmetric multibearer connection.  Indicates the steps that have to be followed to initiate a FT initiated ciper-switching procedure.  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.	О			
Logical connection setup, Multi bearer Physical connection setup, and Asymmetric connection?  How could the IUT_1 (PT) be forced to initiate a Double simplex bearer setup procedure?  How could the IUT_1 (PT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection.  How could the IUT_2 (FT) be forced to everse the direction of the bearers used in an asymmetric multibearer connection.  How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  Forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend procedures.  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  Forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  Forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume procedures.  How could the IUT_2 (FT) be forced to initiate a MAC resume procedures.  How could the IUT_1 (PT) be forced to initiate a MAC resume procedures.  How could the IUT_1 (PT) be forced to initiate a MAC resume procedures.  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  How could the IUT_1 (PT) be indicates the steps that have to be followed to initiate a bearer replacement procedure?  How could the IUT_1 (PT) be indicates the steps that have to be followed to initiate a bearer replacement procedure?				
bearer Physical connection setup, and Asymmetric connection?  How could the IUT_1 (PT) be forced to initiate a Double simplex bearer setup procedure?  How could the IUT_1 (PT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  The word of the bearers used in an asymmetric multibearer connection.  Indicates the steps that have to be followed to reverse the direction of the bearers used in an asymmetric multibearer connection.  Indicates the steps that have to be followed to initiate a FT initiated cipher-switching procedure.  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedure.  Indicates the steps that have to be followed to initiate a MAC resume procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer repla				
and Asymmetric connection? How could the IUT_1 (PT) be forced to initiate a Double simplex bearer setup procedure?  B How could the IUT_1 (PT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to switch a connection from followed to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  Forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?				
How could the IUT_1 (PT) be forced to initiate a Double simplex bearer setup procedure?   Indicates the steps that have to be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?   How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?   Indicates the steps that have to be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?   Indicates the steps that have to be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?   Indicates the steps that have to be forced to switch a connection from clear mode to encrypt mode?   Indicates the steps that have to be forced to initiate a MAC suspend?   Indicates the steps that have to be forced to initiate a MAC suspend?   Indicates the steps that have to be forced to initiate a MAC suspend?   Indicates the steps that have to be followed to initiate a MAC suspend procedures.   Indicates the steps that have to be followed to initiate a MAC suspend procedures.   Indicates the steps that have to be followed to initiate a MAC suspend procedures.   Indicates the steps that have to be followed to initiate a MAC resume procedures.   Indicates the steps that have to be followed to initiate a MAC resume procedures.   Indicates the steps that have to be followed to initiate a MAC resume procedures.   Indicates the steps that have to be followed to initiate a MAC resume procedures.   Indicates the steps that have to be followed to initiate a MAC resume procedures.   Indicates the steps that have to be followed to initiate a bearer replacement procedure?   Indicates the steps that have to be followed to initiate a bearer replacement procedure?   Indicates the steps that have to be followed to initiate a bearer replacement procedure?   Indicates the steps that have to be followed to initiate a bearer replacement procedure?   Indicates the steps that have to be followed to initiate a bearer replacement proc				
forced to initiate a Double simplex simplex bearer setup procedure?  How could the IUT_1 (PT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  Forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  Forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  Forced to initiate a MAC suspend?  Forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume procedures.  How could the IUT_2 (FT) be forced to initiate a MAC resume?  Forced to initiate a bearer replacement procedure?  Forced to initiate a bearer replacement procedure.  Forced to initiate a bearer replacement procedure?  Forced to initiate a bearer replacement procedure.	7			
How could the IUT_1 (PT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?		forced to initiate a Double simplex		
forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection.  How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?				
the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection.  How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  Indicates the steps that have to be followed to initiate a MAC resume procedures.  How could the IUT_2 (FT) be forced to initiate a MAC resume?  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure.	8			
multibearer connection?  How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  Indicates the steps that have to be followed to initiate a MAC suspend procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure.				
How could the IUT_2 (FT) be forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.				
forced to reverse the direction of the bearers used in an asymmetric multibearer connection?  10 How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  11 How could the IUT_1 (PT) be forced to initiate a MAC suspend?  12 How could the IUT_2 (FT) be forced to initiate a MAC suspend?  13 How could the IUT_1 (PT) be forced to initiate a MAC resume?  14 How could the IUT_2 (FT) be forced to initiate a MAC resume?  15 How could the IUT_2 (FT) be forced to initiate a MAC resume?  16 How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  17 How could the IUT_1 (PT) be forced to initiate a MAC resume?  18 How could the IUT_2 (FT) be forced to initiate a MAC resume?  19 How could the IUT_2 (FT) be forced to initiate a MAC resume?  10 How could the IUT_1 (PT) be forced to initiate a MAC resume?  11 How could the IUT_1 (PT) be forced to initiate a MAC resume?  12 How could the IUT_1 (PT) be forced to initiate a MAC resume?  13 How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  14 How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  15 How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  16 How could the IUT_1 (PT) be Indicates the steps that have to be followed to initiate a bearer replacement procedure.				
the bearers used in an asymmetric multibearer connection?  How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a bearer followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.	9			
multibearer connection?  How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.				
How could the IUT_2 (FT) be forced to switch a connection from clear mode to encrypt mode?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.				
forced to switch a connection from clear mode to encrypt mode?  How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.	10			
Clear mode to encrypt mode?   Cipher-switching procedure.				
How could the IUT_1 (PT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  How could the IUT_1 (PT) be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.				
procedures.  How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  Followed to initiate a MAC resume procedures.  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  How could the IUT_1 (PT) be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.	11	How could the IUT_1 (PT) be	Indicates the steps that have to be	
How could the IUT_2 (FT) be forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.		forced to initiate a MAC suspend?		
forced to initiate a MAC suspend?  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  Indicates the steps that have to be followed to initiate a MAC resume procedures.  Indicates the steps that have to be followed to initiate a MAC resume procedures.  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.				
procedures.  How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.	12			
How could the IUT_1 (PT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  How could the IUT_1 (PT) be followed to initiate a bearer replacement procedure?  How could the IUT_1 (PT) be Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.		torced to initiate a MAC suspend?		
forced to initiate a MAC resume?  followed to initiate a MAC resume procedures.  How could the IUT_2 (FT) be forced to initiate a MAC resume?  followed to initiate a MAC resume procedures.  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.	40	Have apply the HIT 4 /DT\ ba		
procedures.  14 How could the IUT_2 (FT) be forced to initiate a MAC resume?  15 How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  16 How could the IUT_1 (PT) be Indicates the steps that have to be followed to initiate a bearer replacement procedure?  16 Indicates the steps that have to be Indicates the steps that have to be	13			
How could the IUT_2 (FT) be forced to initiate a MAC resume?  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.		norded to initiate a MAC resume?		
forced to initiate a MAC resume?  followed to initiate a MAC resume procedures.  How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  How could the IUT_1 (PT) be Indicates the steps that have to be followed to initiate a bearer replacement procedure.  Indicates the steps that have to be followed to initiate a bearer replacement procedure.	14	How could the ILIT 2 (FT) he		
procedures.  15 How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  16 How could the IUT_1 (PT) be Indicates the steps that have to be Indicates the steps that have to be	' '			
How could the IUT_1 (PT) be forced to initiate a bearer replacement procedure?  Indicates the steps that have to be followed to initiate a bearer replacement procedure.  How could the IUT_1 (PT) be Indicates the steps that have to be				
forced to initiate a bearer replacement procedure? followed to initiate a bearer replacement procedure.  16 How could the IUT_1 (PT) be Indicates the steps that have to be	15	How could the IUT 1 (PT) be	ı	
replacement procedure? replacement procedure.  16 How could the IUT_1 (PT) be Indicates the steps that have to be				
16 How could the IUT_1 (PT) be Indicates the steps that have to be		replacement procedure?		
	16			
		forced to initiate a Class A		
connection handover procedure?   connection handover procedure.		connection handover procedure?	connection handover procedure.	

17	How could the IUT_2 (FT) be	Indicates the steps that have to be	
17	_ ` <i>'</i>		
		followed to initiate an	
	of PT procedure?	authentication of PT procedure.	
18	How could the IUT_1 (PT) be	Indicates the steps that have to be	
	forced to initiate an authentication	followed to initiate an	
	of FT procedure?	authentication of FT procedure.	
19	How could the IUT_2 (FT) be	Indicates the steps that have to be	
	forced to set bit38 in the broadcast	followed to set bit38 in the	
	FT "higher layer capabilities" to	broadcast FT "higher layer	
	'1'?	capabilities" to '1'.	
20	How could the IUT_1 (PT) be	Indicates the steps that have to be	
	forced to initiate a Location	followed to initiate a Location	
	registration procedure?	registration procedure.	
21	How could the IUT_2 (FT) be	Indicates the steps that have to be	
- 1			
	FT "higher layer capabilities" to	broadcast FT "higher layer	
	<b> </b> '1'?	capabilities" to '1'.	
22	How could the IUT_1 (PT) be	Indicates the steps that have to be	
		followed to initiate an Obtain	
<b></b>	rights procedure?	access rights procedure.	
23	How could the IUT_2 (FT) be	Indicates the steps that have to be	
	forced to initiate a terminate	followed to initiate a terminate	
	access rights procedure?	access rights procedure.	
0.4			
24	How could the IUT_2 (FT) be	Indicates the steps that have to be	
	forced to initiate the Key allocation	followed to initiate the Key	
	procedure?	allocation procedure.	
25	How could the IUT_2 (FT) be	Indicates the steps that have to be	
23		•	
	forced to release a call?	followed to release a call.	
26	How could the IUT_2 (FT) be	Indicates the steps that have to be	
	forced to invoke an incoming call?	followed to force IUT_2 (FT) to	
	Ĭ Š	start incoming call.	
27	How could the IUT_1 (PT) be	Indicates the steps that have to be	
21			
	forced to increase the number of	followed to force IUT_1 (PT) to	
	bearers?	increase the number of bearers.	
28	How could the IUT_1 (PT) be	Indicates the steps that have to be	
	forced to decrease the number of	followed to force IUT_1 (PT) to	
	bearers?	decrease the number of bearers.	
29	How could the IUT_2 (FT) be	Indicates the steps that have to be	
	forced to increase the number of	followed to force IUT_2 (FT) to	
	bearers?	increase the number of bearers.	
30	How could the IUT_2 (FT) be	Indicates the steps that have to be	
30			
		followed to force IUT_2 (FT) to	
	bearers?	decrease the number of bearers.	
31	How could the IUT_1 (PT) be	Indicates the steps that have to be	
1	forced to request Service change	followed to force IUT_1 (PT) to	
		request Service change changing	
		the range of bearers (PT Master).	
32	How could the IUT_2 (FT) be	Indicates the steps that have to be	
	forced to request Service change	followed to force IUT_2 (FT) to	
		request Service change changing	
L		the range of bearers (FT Master).	
33	How could the IUT_1 (PT) be	Indicates the steps that have to be	
	forced to initiate the Link release	followed to initiate the Link release	
	procedure?	procedure.	
24	How could the IUT_2 (FT) be	1	
34		Indicates the steps that have to be	
	forced to initiate the Link release	followed to initiate the Link release	
	procedure?	procedure.	
35	How could the IUT_1 (PT) be	Indicates the steps that have to be	
55			
	forced to initiate the following	followed to initiate the following	
	procedures:	procedures:	
	Logical connection release,	Logical connection release,	
	Physical connection release, and	Physical connection release, and	
	Unacknowledged bearer release?	Unacknowledged bearer release.	
	Tonackiowieugeu bealei ielease?	ondomiowiedycu bealti ititast.	L

36	How could the IUT_2 (FT) be	Indicates the steps that have to be	
	forced to initiate the following	followed to initiate the following	
	procedures:	procedures:	
	Logical connection release,	Logical connection release,	
	Physical connection release, and	Physical connection release, and	
	Unacknowledged bearer release?	Unacknowledged bearer release.	
37	How could the IUT_2 (FT) be	Indicates the steps that have to be	
	forced to initiate the Downlink	followed to initiate the Downlink	
	broadcast procedure?	broadcast procedure.	
38	How many bearers can be	PX_Range_of_Bearers_1	
	established during the Outgoing	indicates the range of bearers	
	call?	which can be established during	
	Call:		
		the Outgoing call.	
39	How many bearers can be	PX_Range_of_Bearers_2	
	established during the Incoming	indicates the range of bearers	
	call?	which can be established during	
		the Incoming call.	
40	What shall be the new bandwidth	PX_New_Range_of_Bearers	
1.0	for the Active call?	indicates the new range of bearers	
	ioi aio noave caii:	for the Active call.	
4.0	NAME OF THE PARTY		
41		PX_QoS_Application indicates the	
	the Application side?	claims of an application at the	
		Application side (e.g.	
		throughput/delay/no transmission	
		errors).	
42	What feature shall be observed at	PX QoS User indicates the	
44			
	the User side?	claims of an application at the	
		User side (e.g. web browsing/file	
		transfer/no dropped connections).	
43	How could the IUT_1 (PT) be	Indicates the steps that have to be	
	forced to initiate the Class A link	followed to force IUT_1 (PT) to	
	establishment procedure?	initiate the Class A link	
	establisiffient procedure:		
		establishment procedure.	
44	How could the IUT_1 (PT) be	Indicates the steps that have to be	
	forced to initiate the Class A	followed to force IUT_1 (PT) to	
	acknowledged information transfer	initiate the Class A acknowledged	
	procedure?	information transfer procedure.	
45	How could the IUT_1 (PT) be	Indicates the steps that have to be	
70	forced to initiate the Class A link	followed to force IUT_1 (PT) to	
		_ 、 ,	
	release procedure?	initiate the Class A link release	
		procedure.	
46	How could the IUT_1 (PT) be	Indicates the steps that have to be	
	forced to initiate the U-plane	followed to force IUT_1 (PT) to	
	transmission class 2 procedure?	initiate the U-plane transmission	
1		class 2 procedure.	
47	How could the IUT_2 (FT) be	Indicates the steps that have to be	
<del>"</del>			
	forced to initiate the U-plane	followed to force IUT_2 (FT) to	
	transmission class 2 procedure?	initiate the U-plane transmission	
		class 2 procedure.	
48	What kind of User data	Specifies the possible User data	
1	transmissions shall be executed?	transmissions.	
49	How could the IUT_2 (FT) be	Indicates the steps that have to be	
1-3	forced to initiate the PT alerting		
1	<u> </u>	followed to force IUT_2 (FT) to	
	procedure?	initiate the PT alerting procedure.	
50	How could the IUT_2 (FT) be	Indicates the steps that have to be	
	forced to initiate the Class A link	followed to force IUT_2 (FT) to	
	establishment procedure?	initiate the Class A link	
		establishment procedure.	
1			i
E 1	How could the UT 2 /CT\ be		
51	How could the IUT_2 (FT) be	Indicates the steps that have to be	
51	forced to initiate the Class A	Indicates the steps that have to be followed to force IUT_2 (FT) to	
51		Indicates the steps that have to be followed to force IUT_2 (FT) to	
51	forced to initiate the Class A	Indicates the steps that have to be followed to force IUT_2 (FT) to initiate the Class A acknowledged	
	forced to initiate the Class A acknowledged information transfer procedure?	Indicates the steps that have to be followed to force IUT_2 (FT) to initiate the Class A acknowledged information transfer procedure.	
51	forced to initiate the Class A acknowledged information transfer procedure?  How could the IUT_2 (FT) be	Indicates the steps that have to be followed to force IUT_2 (FT) to initiate the Class A acknowledged information transfer procedure.  Indicates the steps that have to be	
	forced to initiate the Class A acknowledged information transfer procedure?  How could the IUT_2 (FT) be forced to initiate the Class A link	Indicates the steps that have to be followed to force IUT_2 (FT) to initiate the Class A acknowledged information transfer procedure.  Indicates the steps that have to be followed to force IUT_2 (FT) to	
	forced to initiate the Class A acknowledged information transfer procedure?  How could the IUT_2 (FT) be	Indicates the steps that have to be followed to force IUT_2 (FT) to initiate the Class A acknowledged information transfer procedure.  Indicates the steps that have to be	

# Annex B (normative): Profile Conformance Test Report (Profile CTR) proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PIXIT proforma in this annex so that it can be used for its intended purposes and may further publish the completed PIXIT.

The Profile CTR proforma is based on ISO/IEC 9646-5 [19]. Any additional information needed can be found in this document.

# B.1 Identification summary

# B.1.1 Protocol conformance test report

Table B.1: Protocol conformance test report

PCTR Number:	
PCTR Date:	
Test Laboratory Identification:	
Accreditation Status:	
Accreditation Reference:	
Technical Authority:	
Job Title:	
Signature:	
Test Laboratory Manager:	
Signature:	

#### B.1.2 IUT identification

**Table B.2: IUT identification** 

Name:		
Version:		
Protocol specification:	TS 101 947 [10]	
Profile specific ICS:	TS 102 011-1 [13]	
	TS 102 011-2 [14]	

#### B.1.3 Testing environment

**Table B.3: Testing environment** 

Profile specific IXIT:	DTS/DECT-040183 (The present document)
ATS Specification:	DTS/DECT-040183 (The present document)
Abstract Test Method:	DTS/DECT-040183 (The present document)
Means of Testing identification:	
Period of testing:	
Conformance Log reference(s):	
Retention Date for Log reference(s):	

#### B.1.4 Limits and reservation

The test results presented in this test report apply only to the particular IUT declared in clause B.1.2, as presented for test in the period declared in clauses B.1.3, and configured as declared in the relevant IXIT attached to this Profile CTR.

NOTE:	Additional information relevant to the technical contents or further use of the test report, or the rights and obligations of the test laboratory and the client, may be given here. Such information may include restriction on the publication of the report.
B.1.5	Comments
NOTE:	Additional comments may be given by either the client or the test laboratory on any of the contents of the Profile CTR, for example, to note disagreement between the two parties.

# B.2 IUT conformance status

This IUT has or has not been shown by conformance assessment to be non-conformant to the specified profile specification.

Strike the appropriate words in this sentence. If the PICS for this IUT is consistent with the static conformance requirements (as specified in clause 3 in the present document) and there are no "FAIL" verdicts to be recorded (in clause 6) strike the words "has or", otherwise strike the words "or has not".

NOTE: For further details see ISO/IEC 9646-5 [19].

# B.3 Static conformance summary

The Profile specific ICS for this IUT is or is not consistent with the static conformance requirements in the specified profile.

Strike the appropriate words in this sentence.

NOTE: For further details see ISO/IEC 9646-5 [19].

B.4 Dynamic conformance summa
-------------------------------

The test campaign did or did not reveal errors in the IUT.			
Strike the appropriate words in this sentence. If there are no ''FAIL'' verdicts to be recorded (in clause 6 of the present document) strike the words ''did or'', otherwise strike the words ''or did not''.			
Summary of	the results of groups of test:		
NOTE:	For further details see ISO/IEC 9646-5 [19].		
B.5	Static conformance review report		
conformance	indicates non-conformance, this section itemizes the mismatches between the PICS and the static e requirements of the referenced base and profile specification.		

# B.6 Test campaign report

Table B.4: Test campaign report

ATS Reference	Selected?	Run?	Verdict	Observations (Reference to any observations made in clause 7)
01	Yes/No	Yes/No		
02	Yes/No	Yes/No		
03	Yes/No	Yes/No		
04	Yes/No	Yes/No		
05	Yes/No	Yes/No		
06	Yes/No	Yes/No		
07	Yes/No	Yes/No		
08	Yes/No	Yes/No		
09	Yes/No	Yes/No		
10	Yes/No	Yes/No		
11	Yes/No	Yes/No		
12	Yes/No	Yes/No		
14	Yes/No	Yes/No		
15	Yes/No	Yes/No		
16	Yes/No	Yes/No		

B.7	Observations
NOTE:	Additional information relevant to the technical content of the PCTR is given here.


# Annex C (normative): System Conformance Test Report (SCTR) proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PIXIT proforma in this annex so that it can be used for its intended purposes and may further publish the completed PIXIT.

The SCTR proforma is based on ISO/IEC 9646-5 [19]. Any additional information needed can be found in this document.

# C.1 Identification summary

# C.1.1 System conformance test report

Table C.1: System conformance test report

SCTR Number:	
SCTR Date:	
Test Laboratory Manager:	
Signature:	

# C.1.2 Test laboratory

**Table C.2: Test laboratory** 

Identification:	
Address:	
Postal code/city:	
Country:	
Telephone:	
Fax:	
Telex:	
Teletex:	
E-Mail:	

# C.1.3 Client identification

**Table C.3: Client identification** 

Identification:	
Address:	
Postal code/city:	
Country:	
Telephone:	
Fax:	
Telex:	
Teletex:	
E-Mail:	

# C.1.4 System Under Test (SUT)

Table C.4: System Under Test (SUT)

Name:	
Version:	
Supplier:	
Dates of testing:	
Date of receipt of SUT:	
Location of SUT for Testing:	
SCS Identifier:	

# C.1.5 Profile identification

**Table C.5: Profile identification** 

Profile Identification:	V.24 ASAP
Profile Version:	
Profile ICS:	TS 101 947 [10]
Profile Specific IXIT:	Annex A of the present document (DTS/DECT-040183)
PTS-Summary:	The present document (DTS/DECT-040183)
PSTS:	The present document (DTS/DECT-040183)

#### C.1.6 Nature of conformance testing

The purpose of Conformance Testing is to increase the probability that different implementations can inter-work in different environments. However, the complexity of OSI protocols makes exhaustive testing impractical on both technical and economic grounds. Furthermore, there is no guarantee that an SUT, which has passed all the relevant test cases, conforms to a specification. Neither is there any guarantee that such an SUT will inter-work with other real open systems. Rather, the passing of the test cases gives confidence that the SUT has the stated capabilities and that its behaviour conforms consistently in representative instances of communication.

#### C.1.7 Limits and reservations

The test results presented in this test report apply only to the particular SUT and component IUTs declared in clause C.1.4 and C.1.8, for the functionality described in the referenced SCS and in the ICS referenced in each PCTR, as presented for test in the period declared in clause C.1.4 and configured as declared in the relevant IXIT referenced in each PCTR. This SCTR may not be reproduced except in full together with its SCS.

Table C.6: Limits and reservations

NOTE: Additional information relevant to the technical contents or further use of the test report, or to the rights and obligations of the test laboratory and the client, may be given here. Such information may include restrictions on the publication of the report.

## C.1.8 Record of agreement

A definition of what parts of the SUT were considered to be the IUT during testing, and of the abstract test method and abstract test suite that were used:

Table C.7: Record of agreement

IUT Definition Reference	Protocol	ATM	ATS
	Physical Layer	No	No
	MAC Layer	The present document (DTS/DECT-040183)	No
	DLC Layer	The present document (DTS/DECT-040183)	No
	NWK Layer	The present document (DTS/DECT-040183)	No

#### C.1.9 Comments

**Table C.8: Comments** 

Additional comments reference in annex:	

NOTE: Additional comments may be given by either the client or test laboratory on any of the contents of the SCTR, for example, to note disagreement between the two parties.

# C.2 System report summary

# C.2.1 Profile testing summary

# C.2.1.1 Physical Layer

Table C.9: Physical Layer

Accreditation status	
Accreditation reference	
Implementation identifier	
IUT definition reference	
Protocol specification	EN 300 175-2 1 [2]
ICS	No
IXIT	The present document (DTS/DECT-040183)
PCTR Number	
PCTR Date	
PSTS	The present document (DTS/DECT-040183)
ATS specification	The present document (DTS/DECT-040183)
ATM	The present document (DTS/DECT-040183)
Means of Testing identifier	
Conformance Status: Static conformance errors?	Yes/No
Conformance Status: Dynamic conformance errors?	Yes/No
Number of Test cases run:	
Number of Test cases Passed:	
Number of Test cases Inconclusive:	
Number of Test cases Failed:	
Observations:	

# C.2.1.2 MAC layer

Table C.10: MAC layer

Accreditation status	
Accreditation reference	
Implementation identifier	
IUT definition reference	
Protocol specification	EN 300 175-3 1 [3]
ICS	TS 102 011-1 [13]
	TS 102 011-2 [14]
IXIT	The present document (DTS/DECT-040183)
PCTR Number	
PCTR Date	
PSTS	The present document (DTS/DECT-040183)
ATS specification	The present document (DTS/DECT-040183)
ATM	The present document (DTS/DECT-040183)
Means of Testing identifier	
Conformance Status: Static conformance errors?	Yes/No
Conformance Status: Dynamic conformance errors?	Yes/No
Number of Test cases run:	
Number of Test cases Passed:	
Number of Test cases Inconclusive:	
Number of Test cases Failed:	
Observations:	

# C.2.1.3 DLC layer

Table C.11: DLC layer

Accreditation status	
Accreditation reference	
Implementation identifier	
IUT definition reference	
Protocol specification	EN 300 175-4 1 [4]
ICS	TS 102 011-1 [13]
	TS 102 011-2 [14]
IXIT	The present document (DTS/DECT-040183)
PCTR Number	
PCTR Date	
PSTS	The present document (DTS/DECT-040183)
ATS specification	The present document (DTS/DECT-040183)
ATM	The present document (DTS/DECT-040183)
Means of Testing identifier	
Conformance Status: Static conformance errors?	Yes/No
Conformance Status: Dynamic conformance errors?	Yes/No
Number of Test cases run:	
Number of Test cases Passed:	
Number of Test cases Inconclusive:	
Number of Test cases Failed:	
Observations:	

# C.2.1.4 NWK layer

Table C.12: NWK layer

Accreditation status	
Accreditation reference	
Implementation identifier	
IUT definition reference	
Protocol specification	EN 300 175-5 1 [5]
ICS	TS 102 011-1 [13]
	TS 102 011-2 [14]
IXIT	The present document (DTS/DECT-040183)
PCTR Number	
PCTR Date	
PSTS	The present document (DTS/DECT-040183)
ATS specification	The present document (DTS/DECT-040183)
ATM	The present document (DTS/DECT-040183)
Means of Testing identifier	
Conformance Status: Static conformance errors?	Yes/No
Conformance Status: Dynamic conformance errors?	Yes/No
Number of Test cases run:	
Number of Test cases Passed:	
Number of Test cases Inconclusive:	
Number of Test cases Failed:	
Observations:	

# Annex D (normative): System Conformance Statement (V.24) proforma

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PIXIT proforma in this annex so that it can be used for its intended purposes and may further publish the completed PIXIT.

The SCS proforma is based on ISO/IEC 9646-5 [19]. Any additional information needed can be found in this document.

# D.1 Identification summary

#### D.1.1 SCS identification

**Table D.1: SCS identification** 

SCS Serial Number:	
SCS Date:	

#### D.1.2 IUT identification

**Table D.2: IUT identification** 

Trade Name:	
Type:	
Version:	
Serial Number:	

# D.1.3 Client identification

**Table D.3: Client identification** 

Company:	
Street Number:	
Postal Code/City:	
Country:	
Contact Person Name:	
Telephone:	
Fax:	
Telex:	
Teletex:	
E-Mail:	

# D.1.4 Supplier identification

**Table D.4: Supplier identification** 

Company:	
Street Number:	
Postal Code/City:	
Country:	
Contact Person Name:	
Telephone:	
Fax:	
Telex:	
Teletex:	
E-Mail:	

# D.1.5 Manufacturer identification

(If different from client)

**Table D.5: Manufacturer identification** 

Company:	
Street Number:	
Postal Code/City:	
Country:	
Contact Person Name:	
Telephone:	
Fax:	
Telex:	
Teletex:	
E-Mail:	

# D.1.6 Protocols identification

**Table D.6: Protocols identification** 

Protocol Name	Specification Reference	PICS Reference	PCTR Reference	PCTR Reference from previous campaign
Physical Layer	EN 300 175-2 [2]	TS 102 011-1 [13] TS 102 011-2 [14]	The present document (DTS/DECT-040183)	
MAC Layer	EN 300 175-3 [3]	TS 102 011-1 [13] TS 102 011-2 [14]	The present document (DTS/DECT-040183)	
DLC Layer	EN 300 175-4 [4]	TS 102 011-1 [13] TS 102 011-2 [14]	The present document (DTS/DECT-040183)	
NWK Layer	EN 300 175-5 [5]	TS 102 011-1 [13] TS 102 011-2 [14]	The present document (DTS/DECT-040183)	

# D.1.7 Profile identification

**Table D.7: Profile identification** 

Profile Identifier	Specification Reference	Profile ICS Specific Reference	SCTR Reference	SCTR reference from previous campaign
V.24 ASAP			The present document (DTS/DECT-040183)	

# D.2 Miscellaneous system information

# D.2.1 Configuration

**Table D.8: Configuration** 

CPU Type:	
Bus-System:	
Operating System Name:	
Additional:	

# D.2.2 Other information

# History

Document history		
V1.1.1	November 2001	Publication