

ETSI TS 125 123 V4.0.0 (2001-03)

Technical Specification

Universal Mobile Telecommunications System (UMTS); Requirements for support of radio resource management (TDD) (3GPP TS 25.123 version 4.0.0 Release 4)



Reference

RTS/TSGR-0425123Uv4

Keywords

UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.

All rights reserved.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by the ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under www.etsi.org/key.

Contents

Foreword.....	9
1 Scope	10
2 References	10
3 Definitions, symbols and abbreviations.....	11
3.1 Definitions.....	11
3.2 Symbols.....	11
3.3 Abbreviations	12
4 Idle Mode	12
4.1 Cell Selection	12
4.1.1 Introduction	12
4.2 Cell Re-selection	12
4.2.1 Introduction	12
4.2.2 Requirements.....	13
4.2.2.1 Measurement and evaluation of cell selection criteria S_{rxlev} of serving cell.....	13
4.2.2.1.1 3.84 Mcps TDD option	13
4.2.2.1.2 1.28 Mcps TDD option	13
4.2.2.2 Measurement of intra-frequency cells	13
4.2.2.2.1 3.84 Mcps option	13
4.2.2.2.2 1.28 Mcps option	13
4.2.2.3 Measurement of inter-frequency TDD cells	14
4.2.2.3.1 3.84 Mcps option	14
4.2.2.3.2 1.28 Mcps option	14
4.2.2.3A 1.28 Mcps TDD to 3.84 Mcps TDD cell re-selection	14
4.2.2.4 Measurement of inter-frequency FDD cells	15
4.2.2.4.1 3.84 Mcps option	15
4.2.2.4.2 1.28 Mcps option	15
4.2.2.5 Measurement of inter-RAT GSM cells.....	15
4.2.2.5.1 3.84 Mcps option	15
4.2.2.5.2 1.28 Mcps option	16
4.2.2.6 Evaluation of cell reselection criteria	16
4.2.2.6.1 3.84 Mcps option	16
4.2.2.6.2 1.28 Mcps option	16
4.2.2.7 Maximum interruption time in paging reception.....	16
4.2.2.7.1 3.84 Mcps option	16
4.2.2.7.2 1.28 Mcps option	17
4.2.2.8 Numbers of cells in neighbouring cell list.....	17
4.2.2.8.1 3.84 Mcps option	17
4.2.2.8.2 1.28 Mcps option	18
5 UTRAN Connected Mode Mobility.....	18
5.1 TDD/TDD Handover	18
5.1.1 Introduction	18
5.1.2 Requirements.....	18
5.1.2.1 TDD/TDD Handover delay	18
5.1.2.1.1 3.84 Mcps TDD option	18
5.1.2.1.2 1.28 Mcps TDD option	19
5.1.2.2 Interruption time.....	19
5.1.2.2.1 3.84 Mcps TDD option	19
5.1.2.2.2 1.28 Mcps TDD option	20
5.2 TDD/FDD Handover.....	20
5.2.1 Introduction	20
5.2.2 Requirements.....	20
5.2.2.1 Handover delay.....	20
5.2.2.1.1 3.84 Mcps TDD option	20
5.2.2.1.2 1.28 Mcps TDD option	21

5.2.2.2	Interruption time	21
5.2.2.2.1	3.84 Mcps TDD option	21
5.2.2.2.2	1.28 Mcps TDD option	21
5.3	TDD/GSM Handover	22
5.3.1	Introduction	22
5.3.2	Requirements	22
5.3.2.1	Handover delay	22
5.3.2.1.1	3.84 Mcps TDD option	22
5.3.2.1.2	1.28 Mcps TDD option	22
5.3.2.2	Interruption time	23
5.3.2.2.1	3.84 Mcps TDD option	23
5.3.2.2.2	1.28 Mcps TDD option	23
5.4	Cell Re-selection in Cell_FACH	23
5.4.1	Introduction	23
5.4.2	Requirements	23
5.4.2.1	Measurements	24
5.4.2.2	Cell re-selection delay	24
5.4.2.2.1	Intra-frequency cell re-selection	24
5.4.2.2.2	Inter-frequency TDD cell re-selection	24
5.4.2.2.3	Inter-frequency FDD cell re-selection	25
5.4.2.2.4	Inter-RAT cell re-selection	25
5.4.2.3	Interruption in FACH message reception Measurements	25
5.5	Cell Re-selection in Cell_PCH	26
5.5.1	Introduction	26
5.5.2	Requirements	26
5.5.2.1	3.84 Mcps option	26
5.5.2.2	1.28 Mcps option	26
5.6	Cell Re-selection in URA_PCH	26
5.6.1	Introduction	26
5.6.2	Requirements	26
5.6.2.1	3.84 Mcps option	26
5.6.2.2	1.28 Mcps option	26
6	Dynamic channel allocation	27
6.1	Introduction	27
6.2	Implementation requirements	27
6.3	Number of timeslots to be measured	27
6.3.1	3.84 Mcps TDD option	27
6.3.2	1.28 Mcps TDD option	27
6.4	Measurement reporting delay	27
7	Timing characteristics	27
7.1	Timing Advance (TA) requirements	27
7.1.1	3.84 Mcps TDD option	27
7.1.2	1.28 Mcps TDD option	27
7.1.2.1	Uplink synchronization control requirements for UE for 1.28 Mcps TDD option	28
7.1.2.1.1	Uplink synchronization control steps	28
7.1.2.1.1.1	Minimum requirement	28
7.1.2.1.2	Timing Advance (T_{ADV}) for 1.28 Mcps TDD	28
7.1.2.1.2.1	Accuracy requirements	28
7.1.2.1.2.2	Range/mapping	28
7.2	Cell synchronization accuracy	29
7.2.1	Definition	29
7.2.2	Minimum requirements	29
8	UE Measurements Procedures	29
8.1	Measurements in CELL_DCH State (3.84 Mcps option)	29
8.1.1	Introduction	29
8.1.2	Requirements	29
8.1.2.1	UE Measurement Capability	29
8.1.2.2	TDD intra frequency measurements	30
8.1.2.2.1	Identification of a new cell	30
8.1.2.2.2	UE P-CCPCH measurement capability	30

8.1.2.2.3	Periodic Reporting	30
8.1.2.2.4	Event-triggered Periodic Reporting	30
8.1.2.2.5	Event Triggered Reporting.....	31
8.1.2.3	TDD inter frequency measurements	31
8.1.2.3.1	Identification of a new cell.....	31
8.1.2.3.2	Measurement period.....	31
8.1.2.3.3	Periodic Reporting	32
8.1.2.3.4	Event Triggered Reporting.....	32
8.1.2.4	FDD measurements	32
8.1.2.4.1	Identification of a new cell.....	32
8.1.2.4.2	Measurement period.....	32
8.1.2.4.3	Periodic Reporting	33
8.1.2.4.4	Event Triggered Reporting.....	33
8.1.2.5	GSM measurements.....	33
8.1.2.5.1	GSM carrier RSSI.....	33
8.1.2.5.2	BSIC verification	34
8.1.2.5.2.1	Initial BSIC identification.....	34
8.1.2.5.2.2	BSIC re-confirmation.....	34
8.1.2.6	TDD Synchronisation to new cells	35
8.1A	Measurements in CELL_DCH State (1.28 Mcps option).....	35
8.2	Parallel Measurements in CELL_DCH State (3.84 Mcps option)	36
8.2.1	Introduction	36
8.2.2	Requirements.....	36
8.2A	Parallel Measurements in CELL_DCH State (1.28 Mcps option).....	36
8.3	Capabilities for Support of Event Triggering and Reporting Criteria	36
8.3.1	Introduction	36
8.3.2	Requirements.....	36
8.3A	Capabilities for Support of Event Triggering and Reporting Criteria (1.28 Mcps option).....	37
8.4	Measurements in CELL_FACH State (3.84 Mcps option)	37
8.4.1	Introduction	37
8.4.2	Requirements.....	37
8.4A	Measurements in CELL_FACH State (1.28 Mcps option).....	37
9	Measurements performance requirements.....	37
9.1	Measurements performance for UE	38
9.1.1	Performance for UE measurements in downlink (RX).....	38
9.1.1.1	P-CCPCH RSCP (TDD).....	38
9.1.1.1.1	Absolute accuracy requirements	38
9.1.1.1.2	Relative accuracy requirements	38
9.1.1.1.3	Range/mapping	39
9.1.1.2	CPICH measurements (FDD)	39
9.1.1.2.1	CPICH RSCP.....	40
9.1.1.2.2	CPICH Ec/Io	40
9.1.1.3	Timeslot ISCP	41
9.1.1.3.1	Absolute accuracy requirements	41
9.1.1.3.2	Range/mapping	41
9.1.1.4	UTRA carrier RSSI	42
9.1.1.4.1	Absolute accuracy requirement.....	42
9.1.1.4.2	Relative accuracy requirement.....	42
9.1.1.4.3	Range/mapping	42
9.1.1.5	GSM carrier RSSI.....	43
9.1.1.6	SIR 43	
9.1.1.6.1	Absolute accuracy requirements	43
9.1.1.6.2	Range/mapping	43
9.1.1.7	Transport channel BLER.....	44
9.1.1.7.1	BLER measurement requirement	44
9.1.1.7.2	Range/mapping	44
9.1.1.8	SFN-SFN observed time difference.....	44
9.1.1.8.1	Accuracy requirements	44
9.1.1.8.1.2	1.28 Mcps TDD option	45
9.1.1.8.2	Range/mapping	45
9.1.1.8.2.2	1.28 Mcps TDD option	46

9.1.1.9	Observed time difference to GSM cell	47
9.1.1.9.1	Accuracy requirements	47
9.1.1.9.2	Range/mapping	47
9.1.1.10	UE GPS Timing of Cell Frames for UP	48
9.1.1.10.1	Accuracy requirement	48
9.1.1.10.2	UE GPS timing of Cell Frames for UP measurement report mapping	48
9.1.1.11	SFN-CFN observed time difference	48
9.1.1.11.1	Accuracy requirements	49
9.1.1.11.2	Range/mapping	49
9.1.2	Performance for UE Measurements in Uplink (TX)	50
9.1.2.1	UE transmitted power	50
9.1.2.1.1	Absolute accuracy requirements	50
9.1.2.1.2	Range/mapping	50
9.2	Measurements Performance for UTRAN	51
9.2.1	Performance for UTRAN Measurements in Uplink (RX)	51
9.2.1.1	RSCP 51	
9.2.1.1.1	Absolute accuracy requirements	51
9.2.1.1.2	Relative accuracy requirements	51
9.2.1.1.3	Range/mapping	51
9.2.1.2	Timeslot ISCP	52
9.2.1.2.1	Absolute accuracy requirements	52
9.2.1.2.2	Range/mapping	52
9.2.1.3	RECEIVED TOTAL WIDE BAND POWER	52
9.2.1.3.1	Absolute accuracy requirements	52
9.2.1.3.2	Range/mapping	52
9.2.1.4	SIR 53	
9.2.1.4.1	Absolute accuracy requirements	53
9.2.1.4.2	Range/mapping	53
9.2.1.5	Transport Channel BER	53
9.2.1.5.1	Accuracy requirement	54
9.2.1.5.2	Range/mapping	54
9.2.1.6	RX Timing Deviation	54
9.2.1.6.1	Accuracy requirements	54
9.2.1.6.2	Range/mapping	55
9.2.1.7	(void) 56	
9.2.1.8	(void) 56	
9.2.1.9	UTRAN GPS Timing of Cell Frames for UP	56
9.2.1.9.1	Accuracy requirement	56
9.2.1.9.2	Range/mapping	56
9.2.1.10	SYNC-UL Timing Deviation for 1.28 Mcps	56
9.2.1.10.1	Accuracy requirements	56
9.2.1.10.2	Range/mapping	57
9.2.1.11	Node B Synchronisation	57
9.2.1.11.1	Cell Synchronisation burst timing Type1 and Type 2	57
9.2.1.11.2	Range/mapping Type 1	57
9.2.1.11.3	Range/mapping Type 2	58
9.2.1.11.4	Cell Synchronisation burst SIR Type1 and Type2	58
9.2.1.11.5	Range/Mapping for Type1 and Type 2	58
9.2.2	Performance for UTRAN measurements in downlink (TX)	59
9.2.2.1	Transmitted carrier power	59
9.2.2.1.1	Accuracy requirements	59
9.2.2.1.2	Range/mapping	59
9.2.2.2	Transmitted code power	60
9.2.2.2.1	Absolute accuracy requirements	60
9.2.2.2.2	Relative accuracy requirements	60
9.2.2.2.3	Range/mapping	60
10	FPACH physical layer information field definition (1.28 Mcps TDD)	60
10.1	Received starting position of the UpPCH (UpPCH _{POS}) (1.28 Mcps TDD)	61
10.1.1	Range/mapping	61
10.1.2	Accuracy requirements	61
10.2	Transmit Power Level Command for the RACH message (1.28 Mcps TDD)	61

10.2.1	Range/mapping.....	61
10.2.2	Accuracy requirements:.....	61
Annex A (normative): Test Cases		62
A.1	Purpose of Annex	62
A.2	Requirement classification for statistical testing	62
A.2.1	Types of requirements in TS 25.123.....	62
A.2.1.1	Time and delay requirements on UE higher layer actions	62
A.2.1.2	Measurements of power levels, relative powers and time	62
A.2.1.3	Implementation requirements	63
A.2.1.4	Physical layer timing requirements	63
A.2.1.5	BER and BLER requirements.....	63
A.3	Reserved for Future Use.....	63
A.4	Idle Mode	63
A.4.1	Cell selection	63
A.4.2	Cell Re-Selection.....	63
A.4.2.1	Scenario 1: TDD/TDD cell re-selection single carrier case.....	63
A.4.2.1.1	Test Purpose and Environment	63
A.4.2.1.1.1	3.84 Mcps TDD option.....	63
A.4.2.1.1.2	1.28 Mcps TDD option.....	65
A.4.2.1.2	Test Requirements	67
A.4.2.1.2.2	1.28 Mcps TDD option.....	68
A.4.2.2	Scenario 2: TDD/TDD cell re-selection multi carrier case.....	68
A.4.2.2.1	Test Purpose and Environment	68
A.4.2.2.1.1	3.84 Mcps TDD option.....	68
A.4.2.2.1.2	1.28 Mcps TDD option.....	69
A.4.2.2.2	Test Requirements	72
A.4.2.2.2.1	3.84 Mcps TDD option.....	72
A.4.2.2.2.2	1.28 Mcps TDD option.....	72
A.4.2.2A	Scenario 2A: 3.84 Mcps TDD cell re-selection for 1.28 Mcps TDD UE.....	72
A.4.2.2A.1	Test Purpose and Environment	72
A.4.2.2A.2	Test Requirements	73
A.4.2.3	Scenario 3: TDD/FDD cell re-selection	74
A.4.2.3.1	Test Purpose and Environment	74
A.4.2.3.1.1	3.84 Mcps TDD option.....	74
A.4.2.3.1.2	1.28 Mcps TDD option.....	75
A.4.2.3.2	Test Requirements	76
A.4.2.3.2.1	3.84 Mcps TDD option.....	76
A.4.2.3.2.2	1.28 Mcps TDD option.....	76
A.4.2.4	Scenario 4: inter RAT cell re-selection	76
A.4.2.4.1	Test Purpose and Environment	76
A.4.2.4.1.1	3.84 Mcps TDD option.....	76
A.4.2.4.1.2	1.28 Mcps TDD option.....	78
A.4.2.4.2	Test Requirements	79
A.4.2.4.2.1	3.84 Mpcs TDD option.....	79
A.4.2.4.2.2	1.28 Mpcs TDD option.....	80
A.5	UTRAN Connected Mode Mobility	80
A.5.1	TDD/TDD Handover	80
A.5.2	TDD/FDD Handover	80
A.5.3	TDD/GSM Handover	80
A.5.4	Cell Re-selection in CELL_FACH.....	80
A.5.4.1	3.84 Mcps TDD option.....	80
A.5.4.2	1.28 Mcps TDD option.....	80
A.5.4.2.1	One frequency present in neighbour list	80
A.5.4.2.2	Two frequency present in neighbour list.....	82
A.5.5	Cell Re-selection in CELL_PCH.....	84
A.5.6	Cell Re-selection in URA_PCH	84

A.6	Dynamic channel allocation	85
A.7	Timing characteristics	85
A.8	UE Measurements Procedures.....	85
A.8.1	TDD intra frequency measurements.....	85
A.8.1.1	Event triggered reporting in AWGN propagation conditions.....	85
A.8.1.1.1	Test Purpose and Environment	85
A.8.1.1.1.1	3.84 Mcps TDD option.....	85
A.8.1.1.1.2	1.28 Mcps TDD option.....	86
A.8.1.1.2	Test Requirements	87
A.8.2	TDD inter frequency measurements.....	87
A.8.2.1	Correct reporting of neighbours in AWGN propagation condition	87
A.8.2.1.1	Test Purpose and Environment	87
A.8.2.1.2	Test Requirements	88
A.8.3	FDD measurements	88
A.8.3.1	Correct reporting of FDD neighbours in AWGN propagation condition	88
A.8.3.1.1	Test Purpose and Environment	88
A.8.3.1.1.1	3.84 Mcps TDD option.....	88
A.8.3.1.1.2	1.28 Mcps TDD option.....	89
A.8.3.1.2	Test Requirements	90
A.8.3.1.2.1	3.84 Mcps TDD option.....	90
A.8.3.1.2.2	1.28 Mcps TDD option.....	90
A.9	Measurement Performance Requirements.....	90
A.9.1	Measurement Performance for UE	90
A.9.1.1	TDD intra frequency measurements.....	91
A.9.1.1.1	3.84 Mcps TDD option	91
A.9.1.1.2	1.28 Mcps TDD option	91
A.9.1.2	TDD inter frequency measurements.....	92
A.9.1.2.1	3.84 Mcps TDD option	92
A.9.1.2.2	1.28 Mcps TDD option	92
A.9.1.3	FDD inter frequency measurements	93
A.9.1.3.1	3.84 Mcps TDD option	93
A.9.1.4	UTRA carrier RSSI inter frequency measurements	93
A.9.1.4.1	3.84 Mcps TDD option	93
A.9.1.4.2	1.28 Mcps TDD option	94
A.9.2	Measurement Performance for UTRAN.....	94
A.9.2.1	UTRAN RX measurements.....	94
A.9.2.1.1	3.84 Mcps TDD option	94
A.9.2.1.2	1.28 Mcps TDD option	94
Annex B (informative):	Change History.....	95

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

This Technical Specification specifies requirements for support of Radio Resource Management for TDD. These requirements include requirements on measurements in UTRAN and the UE as well as requirements on node dynamic behaviour and interaction, in terms of delay and response characteristics.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document in the same Release as the present document.
- A non-specific reference to an TS shall also be taken to refer to later versions published as an EN with the same number.

- [1] (void)
- [2] (void)
- [3] 3GPP TS 25.101: "UE Radio transmission and reception (FDD)".
- [4] 3GPP TS 25.104: "UTRAN(BS) FDD; Radio transmission and reception".
- [5] 3GPP TS 25.102: "UTRAN (UE) TDD; Radio transmission and reception".
- [6] 3GPP TS 25.105: "UTRAN (BS) TDD; Radio transmission and reception".
- [7] 3GPP TS 25.303: "Interlayer Procedures in Connected Mode".
- [8] (void)
- [9] 3GPP TS 25.142: "Base station conformance testing (TDD)".
- [10] (void)
- [11] (void)
- [12] 3GPP TS 25.922: "RRM Strategies".
- [13] (void)
- [14] 3GPP TS 25.225: "Physical layer measurements (TDD)".
- [15] 3GPP TS 25.302: "Services provided by physical layer".
- [16] 3GPP TS 25.331: "RRC protocol specification".
- [17] 3GPP TS 25.224: "Physical layer procedures (TDD)".
- [18] 3GPP TS 25.304: "UE procedures in idle mode".
- [19] ETSI ETR 273-1-2: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement of radiated methods of measurement (using test sites) and evaluation of the corresponding measurement uncertainties; Part 1: Uncertainties in the measurement of mobile radio equipment characteristics; Sub-part 2: Examples and annexes".

[20] 3GPP TS 45.005: "Radio transmission and reception".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purpose of the present document the following definitions apply.

The main general definitions strictly related to the transmission and reception characteristics but important also for this specification can be found in [3] for UE FDD, in [4] for BS FDD, in [5] for UE TDD, in [6] for BS TDD.

Node B: A logical node responsible for radio transmission / reception in one or more cells to/from the User Equipment. Terminates the Iub interface towards the RNC

3.2 Symbols

For the purposes of the present document, the following symbols apply:

[...] Values included in square bracket must be considered for further studies, because it means that a decision about that value was not taken.

$\frac{DPCH_E_c}{I_{or}}$	The ratio of the transmit energy per PN chip of the DPCH to the total transmit power spectral density at the Node B antenna connector.
E_c	Average energy per PN chip.
$\frac{E_c}{I_{or}}$	The ratio of the average transmit energy per PN chip for different fields or physical channels to the total transmit power spectral density at the Node B antenna connector.
I_o	The total received power density, including signal and interference, as measured at the UE antenna connector.
I_{oc}	The power spectral density of a band limited white noise source (simulating interference from other cells) as measured at the UE antenna connector.
I_{or}	The total transmit power spectral density of the down link at the Node B antenna connector.
\hat{I}_{or}	The received power spectral density of the down link as measured at the UE antenna connector.
$\frac{OCNS_E_c}{I_{or}}$	The ratio of the average transmit energy per PN chip for the OCNS to the total transmit power spectral density at the Node B antenna connector.
$\frac{PICH_E_c}{I_{or}}$	The ratio of the average transmit energy per PN chip for the PICH to the total transmit power spectral density at the Node B antenna connector.
$\frac{PCCPCH_E_c}{I_{or}}$	The ratio of the average transmit energy per PN chip for the PCCPCH to the total transmit power spectral density at the Node B antenna connector.
$\frac{SCH_E_c}{I_{or}}$	The ratio of the average transmit energy per PN chip for the SCH to the total transmit power spectral density at the Node B antenna connector.

PENALTY_TIME	Defined in TS 25.304
Qhyst	Defined in TS 25.304
Qoffset _{s,n}	Defined in TS 25.304
Qqualmin	Defined in TS 25.304
Qrxlevmin	Defined in TS 25.304
Sintersearch	Defined in TS 25.304
Sintrasearch	Defined in TS 25.304
SsearchRAT	Defined in TS 25.304
T1	Time period 1
T2	Time period 2
TEMP_OFFSET	Defined in TS 25.304
Treselection	Defined in TS 25.304
UE_TXPWR_MAX_RACH	Defined in TS 25.304

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ACPR	Adjacent Channel Power Ratio
BER	Bit Error Ratio
BLER	Block Error Ratio
BS	Base Station
CW	Continuous wave (unmodulated signal)
CFN	Connection Frame Number
CPICH	Common Pilot Channel
DL	Downlink (forward link)
DPCH	Dedicated Physical Channel
DRX	Discontinuous Reception
EIRP	Equivalent Isotropic Radiated Power
FDD	Frequency Division Duplex
OCNS	Orthogonal Channel Noise Simulator, a mechanism used to simulate the users or control signals on the other orthogonal channels of a Forward link.
P-CCPCH	Primary Common Control Physical Channel
PICH	Paging Indicator Channel
PIN	Personal Identification Number
PLMN	Public Land Mobile Network
PPM	Parts Per Million
RRM	Radio Resource Management
RRC	Radio Resource Control
RSCP	Received Signal Code Power
RSSI	Received Signal Strength Indicator
SCH	Synchronization Channel consisting of Primary and Secondary synchronization channels
SFN	System Frame Number
SIR	Signal to Interference ratio
TDD	Time Division Duplex
TPC	Transmit Power Control
UE	User Equipment
UL	Uplink (reverse link)
UTRA	UMTS Terrestrial Radio Access

4 Idle Mode

4.1 Cell Selection

4.1.1 Introduction

After a UE has switched on and a PLMN has been selected, the Cell selection process takes place, as described in TS25.304. This process allows the UE to select a suitable cell where to camp on in order to access available services. In this process the UE can use stored information (*Stored information cell selection*) or not (*Initial cell selection*).

4.2 Cell Re-selection

4.2.1 Introduction

The cell reselection procedure allows the UE to select a more suitable cell and camp on it.

When the UE is in *Normally Camped* state on a TDD cell, the UE shall attempt to detect, synchronise and monitor intra-frequency, inter-frequency and inter-RAT cells indicated in the measurement control system information of the serving cell. If the occasions/triggers occur, as specified in 25.304, the UE shall perform the Cell Reselection Evaluation process.

4.2.2 Requirements

4.2.2.1 Measurement and evaluation of cell selection criteria S_{rxlev} of serving cell

4.2.2.1.1 3.84 Mcps TDD option

The UE shall measure the PCCPCH RSCP level of the serving cell and evaluate the cell selection criterion S_{rxlev} defined in TS25.304 for the serving cell at least once per DRX cycle. The UE shall filter the PCCPCH RSCP measurement of the serving cell using at least 2 measurements, which are taken so that the time difference between the measurements is at least $T_{measureTDD}/2$ (see table 4.1).

If the UE has evaluated in N_{serv} successive measurements that the serving cell does not fulfil the cell selection criterion S_{rxlev} , the UE shall initiate the measurements of all neighbour cells indicated in the measurement control system information, regardless of the measurement rules currently limiting UE measurement activities.

If the UE has not found any new suitable cell based the on searches and measurements of the neighbour cells indicated in the measurement control system information for [TBD] s, the UE shall initiate cell selection procedures for the selected PLMN as defined in TS25.304.

4.2.2.1.2 1.28 Mcps TDD option

The UE shall measure the PCCPCH RSCP level of the serving cell and evaluate the cell selection criterion S defined in TS25.304 for the serving cell once per DRX cycle. The UE shall filter the PCCPCH RSCP level of the serving cell using at least 2 measurements, which are taken so that the time difference between the measurements is at least $T_{measureNTDD}/2$ (see table 4.1A).

If the UE has evaluated in N_{serv} successive measurements that the serving cell does not fulfil the cell selection criterion S the UE shall initiate the measurements of all neighbour cells indicated in the measurement control system information, regardless of the measurement rules currently limiting UE measurement activities.

If the UE has not found any new suitable cell based the on searches and measurements of the neighbour cells indicated in the measurement control system information for [TBD] s, the UE shall initiate cell selection procedures for the selected PLMN as defined in TS25.304.

4.2.2.2 Measurement of intra-frequency cells

4.2.2.2.1 3.84 Mcps option

The UE shall measure PCCPCH RSCP at least every $T_{measureTDD}$ (see table 4.1) for intra-frequency cells that are detected and measured according to the measurement rules. $T_{measureTDD}$ is defined in Table 4.1. The UE shall filter PCCPCH RSCP measurements of each measured intra-frequency cell using at least 2 measurements, which are taken so that the time difference between the measurements is at least $T_{measureTDD}/2$.

The filtering shall be such that the UE shall be capable of evaluating that an intra-frequency cell has become better than the serving cell within $T_{evaluateTDD}$ (see table 4.1), from the moment the intra-frequency cell became at least 2 dB better ranked than the current serving cell, provided that Treselection timer is set to zero.

If parameter Treselection has value different from zero, the UE shall evaluate an intra-frequency cell better than the serving cell during the Treselection time, before the UE shall reselect the new cell.

4.2.2.2.2 1.28 Mcps option

The UE shall measure PCCPCH RSCP at least every $T_{measureNTDD}$ (see table 4.1A) for intra-frequency cells that are detected and measured according to the measurement rules. $T_{measureNTDD}$ is defined in Table 4.1A. The UE shall filter PCCPCH RSCP measurements of each measured intra-frequency cell using at least 2 measurements, which are taken so that the time difference between the measurements is at least $T_{measureNTDD}/2$.

The filtering shall be such that the UE shall be capable of evaluating that an intra-frequency cell has become better than the serving cell within $T_{evaluateNTDD}$ (see table 4.1A), from the moment the intra-frequency cell became at least [2] dB better ranked than the current serving cell, provided that Treselection timer is set to zero and PCCPCH RSCP is used as measurement quantity for cell reselection.

If parameter *Treselection* has value different from zero, the UE shall evaluate an intra-frequency cell better than the serving cell during the *Treselection* time, before the UE shall reselect the new cell.

4.2.2.3 Measurement of inter-frequency TDD cells

4.2.2.3.1 3.84 Mcps option

The UE shall measure PCCPCH RSCP at least every $(N_{\text{carrier}}-1) * T_{\text{measureTDD}}$ (see table 4.1) for inter-frequency cells that are detected and measured according to the measurement rules. The parameter N_{carrier} is the number of carriers used for TDD cells. The maximum number of carriers is 3 including the carrier the UE is camped on. The UE shall filter PCCPCH RSCP measurements of each measured inter-frequency cell using at least 2 measurements, which are taken so that the time difference between the measurements is at least $T_{\text{measureTDD}}/2$.

The filtering of PCCPCH RSCP shall be such that the UE shall be capable of evaluating that an already detected inter-frequency cell has become better ranked than the serving cell within $(N_{\text{carrier}}-1) * T_{\text{evaluateTDD}}$ from the moment the inter-frequency cell became at least 3 dB better than the current serving cell provided that *Treselection* timer is set to zero. For non-detected inter-frequency cells, the filtering shall be such that the UE shall be capable of evaluating that inter-frequency cell has become better ranked than the serving cell within 30 s from the moment the inter-frequency cell became at least 3 dB better than the current serving cell provided that *Treselection* timer is set to zero.

If *Treselection* timer has a value different from zero, the UE shall evaluate an inter-frequency cell better than the serving cell during the *Treselection* time, before the UE shall reselect the new cell.

4.2.2.3.2 1.28 Mcps option

The UE shall measure PCCPCH RSCP at least every $(N_{\text{carrier}}-1) * T_{\text{measureNTDD}}$ (see table 4.1A) for inter-frequency cells that are detected and measured according to the measurement rules. The parameter N_{carrier} is the number of carriers used for 1.28 Mcps TDD OPTION cells. The maximum number of carriers is [3] including the carrier the UE is camped on. The UE shall filter PCCPCH RSCP measurements of each measured inter-frequency cell using at least 2 measurements, which are taken so that the time difference between the measurements is at least $T_{\text{measureNTDD}}/2$.

The filtering of PCCPCH RSCP shall be such that the UE shall be capable of evaluating that an already detected inter-frequency cell has become better ranked than the serving cell within $(N_{\text{carrier}}-1) * T_{\text{evaluateNTDD}}$ from the moment the inter-frequency cell became at least [3] dB better than the current serving cell provided that *Treselection* timer is set to zero. For non-detected inter-frequency cells, the filtering shall be such that the UE shall be capable of evaluating that inter-frequency cell has become better ranked than the serving cell within 30 s from the moment the inter-frequency cell became at least [3] dB better than the current serving cell provided that *Treselection* timer is set to zero.

If *Treselection* timer has a value different from zero, the UE shall evaluate an inter-frequency cell better than the serving cell during the *Treselection* time, before the UE shall reselect the new cell.

4.2.2.3A 1.28 Mcps TDD to 3.84 Mcps TDD cell re-selection

This requirement only applies to 1.28 Mcps UEs supporting this mode.

The ranking of the low and high chip rate TDD cells shall be made according to the cell reselection criteria specified in TS25.304. The use of mapping functions is indicated in the broadcast.

The UE shall measure PCCPCH RSCP at least every $N_{\text{TDDcarrier}} * T_{\text{measureTDD}}$ (see table 4.1A) for inter-frequency cells that are detected and measured according to the measurement rules. The parameter N_{carrier} is the number of carriers used for 3.84 Mcps TDD cells. The maximum number of carriers is 3. The UE shall filter PCCPCH RSCP measurements of each measured high chip rate TDD cell using at least 2 measurements, which are taken so that the time difference between the measurements is at least $T_{\text{measureTDD}}/2$.

The filtering of PCCPCH RSCP shall be such that the UE shall be capable of evaluating that a high chip rate TDD cell has become better ranked than the serving cell within $N_{\text{TDDcarrier}} * T_{\text{evaluateTDD}}$ from the moment the inter-frequency cell became at least [3] dB better ranked than the current serving cell provided that *Treselection* timer is set to zero. For non-detected inter-frequency cells, the filtering shall be such that the UE shall be capable of evaluating that inter-frequency cell has become better ranked than the serving cell within 30 s from the moment the inter-frequency cell became at least [3] dB better than the current serving cell provided that *Treselection* timer is set to zero.

4.2.2.4 Measurement of inter-frequency FDD cells

4.2.2.4.1 3.84 Mcps option

The UE shall measure the signal level CPICH RSCP of each FDD neighbour cell indicated in the measurement control system information of the serving cell, according to the measurement rules defined in TS25.304, at least every $T_{\text{measureFDD}}$ (see table 4.1). The UE shall filter CPICH RSCP measurements of each measured inter-frequency cell using at least 2 measurements. The measurement samples for each cell shall be as far as possible uniformly distributed over the averaging period.

CPICH RSCP is used as measurement quantity for cell reselection, the filtering shall be such that the UE shall be capable of evaluating that an already detected inter-frequency cell has become better ranked than the serving cell within $N_{\text{FDDcarrier}} * T_{\text{evaluateFDD}}$ from the moment the inter-frequency cell became at least 5 dB better than the current serving cell provided that Treselection timer is set to zero. For non-detected inter-frequency cells, the filtering shall be such that the UE shall be capable of evaluating that inter-frequency cell has become better ranked than the serving cell within 30 s from the moment the inter-frequency cell became at least 5 dB better than the current serving cell provided that Treselection timer is set to zero.

If Treselection timer has value different from zero, the UE shall evaluate an inter-frequency cell better ranked than the serving cell during the Treselection time, before the UE shall reselect the new cell.

The ranking of the cells shall be made according to the cell reselection criteria specified in TS25.304. The use of mapping functions is indicated in the broadcast.

4.2.2.4.2 1.28 Mcps option

This requirement only applies to 1.28 Mcps UEs supporting this mode.

The UE shall measure the signal level CPICH RSCP of each FDD neighbour cell indicated in the measurement control system information of the serving cell, according to the measurement rules defined in TS25.304, at least every $T_{\text{measureFDD}}$ (see table 4.1A). The UE shall filter CPICH RSCP measurements of each measured inter-frequency cell using at least 2 measurements. The measurement samples for each cell shall be as far as possible uniformly distributed over the averaging period.

CPICH RSCP is used as measurement quantity for cell reselection, the filtering shall be such that the UE shall be capable of evaluating that an already detected inter-frequency cell has become better ranked than the serving cell within $N_{\text{FDDcarrier}} * T_{\text{evaluateFDD}}$ from the moment the inter-frequency cell became at least [5] dB better than the current serving cell provided that Treselection timer is set to zero. For non-detected inter-frequency cells, the filtering shall be such that the UE shall be capable of evaluating that inter-frequency cell has become better ranked than the serving cell within 30 s from the moment the inter-frequency cell became at least [5] dB better than the current serving cell provided that Treselection timer is set to zero.

The ranking of the cells shall be made according to the cell reselection criteria specified in TS25.304. The use of mapping functions is indicated in the broadcast.

4.2.2.5 Measurement of inter-RAT GSM cells

4.2.2.5.1 3.84 Mcps option

The UE shall measure the signal level of each GSM neighbour cell indicated in the measurement control system information of the serving cell, according to the measurement rules defined in TS25.304, at least every $T_{\text{measureGSM}}$ (see table 4.1). The UE shall maintain a running average of 4 measurements for each cell. The measurement samples for each cell shall be as far as possible uniformly distributed over the averaging period.

The UE shall attempt to verify the BSIC for each of the 4 best ranked GSM BCCH carriers (the best ranked according to the cell reselection criteria defined in TS25.304) at least every 30 seconds if GSM cells are measured according to the measurement rules. If a change of BSIC is detected for one GSM cell then that GSM BCCH carrier shall be treated as a new GSM neighbour cell.

If the UE detects a BSIC, which is not indicated in the measurement control system information, the UE shall not consider that GSM BCCH carrier in cell reselection. The UE also shall not consider the GSM BCCH carrier in cell reselection, if the UE can not demodulate the BSIC of that GSM BCCH carrier.

The UTRAN to GSM Cell Re-Selection allows a UE, supporting both radio access technologies and camped on a UTRAN cell, to re-select a GSM cell and camp on it according to the cell re-selection criteria described in TS 25.304.

4.2.2.5.2 1.28 Mcps option

The UE shall measure the signal level of each GSM neighbour cell indicated in the measurement control system information of the serving cell, according to the measurement rules defined in TS25.304, at least every $T_{\text{measureGSM}}$ (see table 4.1A). The UE shall maintain a running average of 4 measurements for each cell. The measurement samples for each cell shall be as far as possible uniformly distributed over the averaging period.

The UE shall attempt to verify the BSIC for each of the 4 best ranked GSM BCCH carriers (the best ranked according to the cell reselection criteria defined in TS25.304) at least every 30 seconds if GSM cells are measured according to the measurement rules. If a change of BSIC is detected for one GSM cell then that GSM BCCH carrier shall be treated as a new GSM neighbour cell.

If the UE detects a BSIC, which is not indicated in the measurement control system information, the UE shall not consider that GSM BCCH carrier in cell reselection. The UE also shall not consider the GSM BCCH carrier in cell reselection, if the UE can not demodulate the BSIC of that GSM BCCH carrier.

4.2.2.6 Evaluation of cell reselection criteria

4.2.2.6.1 3.84 Mcps option

The UE shall evaluate the cell re-selection criteria defined in TS 25.304 for the cells, which have new measurement results available, at least once every DRX cycle.

Cell reselection shall take place immediately after the UE has found a better suitable cell unless the UE has made cell reselection within the last 1 second.

4.2.2.6.2 1.28 Mcps option

The UE shall evaluate the cell re-selection criteria defined in TS 25.304 for the cells, which have new measurement results available, at least every DRX cycle.

Cell reselection shall take place immediately after the UE has found a better suitable cell unless the UE has made cell reselection within the last 1 second.

4.2.2.7 Maximum interruption time in paging reception

4.2.2.7.1 3.84 Mcps option

UE shall perform the cell re-selection with minimum interruption in monitoring downlink channels for paging reception.

At intra-frequency cell re-selection, the UE shall monitor the downlink of current serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target intra-frequency cell for paging reception. The interruption time shall not exceed 50 ms.

At inter-frequency and inter-RAT cell re-selection, the UE shall monitor the downlink of current serving cell for paging reception until the UE is capable to start monitoring downlink channels for paging reception of the target inter-frequency cell. The interruption time must not exceed $T_{\text{REP}} + 50$ ms. T_{REP} is the longest repetition period for the system information required to be read by the UE to camp on the cell.

These requirements assume sufficient radio conditions, so that decoding of system information can be made without errors.

Table 4.1: $T_{\text{measureTDD}}$, $T_{\text{evaluateTDD}}$, $T_{\text{measureFDD}}$, $T_{\text{evaluateFDD}}$ and $T_{\text{measureGSM}}$

DRX cycle length [s]	N_{serv} [number of successive measurements]	$T_{\text{measureTDD}}$ [s] (number of DRX cycles)	$T_{\text{evaluateTDD}}$ [s] (number of DRX cycles)	$T_{\text{measureFDD}}$ [s] (number of DRX cycles)	$T_{\text{evaluateFDD}}$ [s] (number of DRX cycles)	$T_{\text{measureGSM}}$ [s] (number of DRX cycles)
0.08	4	0.64 (8 DRX cycles)	2.56 (32 DRX cycles)	0.64 (8 DRX cycles)	2.56 (32 DRX cycles)	2.56 (32 DRX cycles)
0.16	4	0.64 (4)	2.56 (16)	0.64 (4)	2.56 (16)	2.56 (16)
0.32	4	1.28 (4)	5.12 (16)	1.28 (4)	5.12 (16)	5.12 (16)
0.64	4	1.28 (2)	5.12 (8)	1.28 (2)	5.12 (8)	5.12 (8)
1.28	2	1.28 (1)	6.4 (5)	1.28 (1)	6.4 (5)	6.4 (5)
2.56	2	2.56 (1)	7.68 (3)	2.56 (1)	7.68 (3)	7.68 (3)
5.12	1	5.12 (1)	10.24 (2)	5.12 (1)	10.24 (2)	10.24 (2)

In idle mode, UE shall support DRX cycles lengths 0.64, 1.28, 2.56 and 5.12 s, according to [16].

4.2.2.7.2 1.28 Mcps option

UE shall perform the cell re-selection with minimum interruption in monitoring downlink channels for paging reception.

At intra-frequency cell re-selection, the UE shall monitor the downlink of current serving cell for paging reception until the UE is capable to start monitoring downlink channels of the target intra-frequency cell for paging reception. The interruption time shall not exceed [50] ms.

At inter-frequency and inter-RAT cell re-selection, the UE shall monitor the downlink of current serving cell for paging reception until the UE is capable to start monitoring downlink channels for paging reception of the target inter-frequency cell. The interruption time must not exceed $T_{\text{REP}} + [50]$ ms. T_{REP} is the longest repetition period for the system information required to be read by the UE to camp on the cell.

These requirements assume sufficient radio conditions, so that decoding of system information can be made without errors.

Table 4.1A: $T_{\text{measureNTDD}}$, $T_{\text{evaluateNTDD}}$, $T_{\text{measureTDD}}$, $T_{\text{evaluateTDD}}$, $T_{\text{measureFDD}}$, $T_{\text{evaluateFDD}}$ and $T_{\text{measureGSM}}$

DRX cycle length [s]	N_{serv} [number of successive measurements]	$T_{\text{measureNTDD}}$ [s] (number of DRX cycles)	$T_{\text{evaluateNTDD}}$ [s] (number of DRX cycles)	$T_{\text{measureTD}_D}$ [s] (number of DRX cycles)	$T_{\text{evaluateTDD}}$ [s] (number of DRX cycles)	$T_{\text{measureFD}_D}$ [s] (number of DRX cycles)	$T_{\text{evaluateFDD}}$ [s] (number of DRX cycles)	$T_{\text{measureGSM}}$ [s] (number of DRX cycles)
0.08	4	0.64 (8 DRX cycles)	2.56 (32 DRX cycles)	0.64 (8 DRX cycles)	2.56 (32 DRX cycles)	0.64 (8 DRX cycles)	2.56 (32 DRX cycles)	2.56 (32 DRX cycles)
0.16	4	0.64 (4)	2.56 (16)	0.64 (4)	2.56 (16)	0.64 (4)	2.56 (16)	2.56 (16)
0.32	4	1.28 (4)	5.12 (16)	1.28 (4)	5.12 (16)	1.28 (4)	5.12 (16)	5.12 (16)
0.64	4	1.28 (2)	5.12 (8)	1.28 (2)	5.12 (8)	1.28 (2)	5.12 (8)	5.12 (8)
1.28	2	1.28 (1)	6.4 (5)	1.28 (1)	6.4 (5)	1.28 (1)	6.4 (5)	6.4 (5)
2.56	2	2.56 (1)	7.68 (3)	2.56 (1)	7.68 (3)	2.56 (1)	7.68 (3)	7.68 (3)
5.12	1	5.12 (1)	10.24 (2)	5.12 (1)	10.24 (2)	5.12 (1)	10.24 (2)	10.24 (2)

In idle mode, UE shall support DRX cycles lengths 0.64, 1.28, 2.56 and 5.12 s.

4.2.2.8 Numbers of cells in neighbouring cell list

4.2.2.8.1 3.84 Mcps option

The UE shall be capable of monitoring 32 intra-frequency TDD cells (including serving cell), 32 inter-frequency cells (including TDD Mode cells and FDD Mode cells if FDD is supported by the UE). The TDD inter-frequency cells can be located on two additional frequencies besides the serving cell and the inter-frequency FDD cells can be located on up to 3 carriers. In addition the UE shall be able to monitor 32 GSM carriers if GSM is supported by the UE. UE measurement activity is controlled by measurement rules defined in TS25.304, allowing the UE to limit its measurement activity if certain conditions are fulfilled.

4.2.2.8.2 1.28 Mcps option

The UE shall be capable of monitoring [32] intra-frequency 1.28 Mcps TDD OPTION cells (including serving cell), - [32] inter-frequency cells including low and high chip rate TDD Mode cells and FDD Mode cells if FDD and/or high chip rate TDD is supported by the UE.

The 1.28 Mcps TDD OPTION inter-frequency cells can be located on [x] additional frequencies besides the serving cell.

The inter-frequency cells can be located on up to [x] carriers.

In addition the UE shall be able to monitor 32 GSM carriers if GSM is supported by the UE. UE measurement activity is controlled by measurement rules defined in in TS25.304, allowing the UE to limit its measurement activity if certain conditions are fulfilled.

5 UTRAN Connected Mode Mobility

This section contains the requirements on the mobility procedures in UTRAN connected mode such as handover and cell re-selection.

Requirements related to the measurements in support of the execution of the UTRAN connected mode mobility procedures are specified, currently not necessarily for all UTRAN connected mode states, in section 8 .

The radio links the UE shall use are controlled by UTRAN with RRC signalling.

UE behaviour in response to UTRAN RRC messages is described in TS25.331.

The purpose of Cell reselection in CELL_FACH, CELL_PCH and URA_PCH states is that the UE shall select a better cell according to the cell reselection criteria in TS 25.303. CELL_FACH, CELL_PCH and URA_PCH states are described in TS 25.331.

The handover process should be implemented in both the UE and UTRAN. The UE measurements and which radio links the UE shall use is controlled by UTRAN with RRC signalling.

Measurements are specified in TS25.225 and UE behaviour in response to UTRAN RRC messages is described in 3GPP TS 25.331. Further descriptions of the measurement procedures can be found in chapter 8.

5.1 TDD/TDD Handover

5.1.1 Introduction

The purpose of TDD/TDD handover is to change the cell of the connection between UE and UTRAN. The handover procedure is initiated from UTRAN with a RRC message that implies a handover, refer to TS25.331. The handover procedure may cause the UE to change its frequency.

For 1.28 Mcps TDD, at the beginning of the measurement process the UE shall find synchronisation to the cell to measure using the synchronisation channel (DwPCH). This is described under 'cell search' in 3GPP RAN TS25.201, TS25.221 TS25.222, TS25.223, TS25.224, TS25.225' if the monitored cell is a 1.28 Mcps TDD cell. For a TDD cell to monitor after this procedure the exact timing of the midamble of the P-CCPCH is known and the measurements can be performed. Depending on the UE implementation and if timing information about the cell to monitor is available, the UE may perform the measurements on the P-CCPCH directly without prior DwPCH synchronisation.

5.1.2 Requirements

5.1.2.1 TDD/TDD Handover delay

5.1.2.1.1 3.84 Mcps TDD option

Procedure delay for all procedures, that can command a hard handover, are specified in TS25.331 section 11.5.

When the UE receives a RRC message implying hard handover with the activation time "now" or earlier than D_{handover} seconds from the end of the last TTI containing the RRC command, the UE shall be ready to start the transmission of the new uplink DPCH within D_{handover} seconds from the end of the last TTI containing the RRC command.

If the access is delayed to an indicated activation time later than D_{handover} seconds from the end of the last TTI containing the RRC command, the UE shall be ready to start the transmission of the new uplink DPCH at the designated activation time.

where:

D_{handover} equals the RRC procedure delay defined in TS25.331 Section 13.5.2 plus the interruption time stated in section 5.1.2.2.1.

5.1.2.1.2 1.28 Mcps TDD option

Procedure delay for all procedures, that can command a hard handover, are specified in TS25.331.

When the UE receives a RRC message that implies a handover, with the activation time "now" or earlier than D_{handover} seconds from the end of the last TTI containing the RRC command, the UE shall start transmission D_{handover} seconds from the end of the last TTI containing the RRC command.

If the access is delayed to an indicated activation time later than D_{handover} seconds from the end of the last TTI containing the RRC command, the UE shall be ready to start the transmission of the new uplink DPCH at the designated activation time.

where:

D_{handover} equals the RRC procedure delay defined in TS25.331 Section 13.5.2 plus the interruption time stated in section 5.1.2.2.2.

5.1.2.2 Interruption time

5.1.2.2.1 3.84 Mcps TDD option

The interruption time i.e. the time between the last TTI containing a transport block on the old DPCH and the time the UE starts transmission of the new uplink DPCH, shall be less than the value in table 5.1 for intra-frequency handover and TDD/TDD inter-frequency handover ... There is different requirement on the interruption time depending on if the cell is known or not.

A cell shall be regarded as known by the UE if

- it has been measured during the last 5 seconds or
- a dedicated connection existed between the UE and the cell during the last 5 seconds.

Table 5.1 TDD/TDD handover – interruption time

TDD/TDD handover case	Maximum delay [ms]	
	One Known Cell in HO command	One Unknown Cell in HO command
Intra-frequency	40	350
Inter-frequency	40	350

The interruption time includes the time that can elapse till the appearance of the channel required for the synchronisation, which can be up to one frame (10ms). And the time that can elapse till the appearance of the slot in which the new uplink DPCH shall be transmitted, which can be up to one frame (10ms).

The requirement in Table 5.1 for the unknown cell shall apply if the signal quality of the unknown cell is good enough for successful synchronisation with one attempt.

NOTE: One synchronisation attempt can consist of coherent averaging using several frames.

5.1.2.2.2 1.28 Mcps TDD option

The interruption time i.e. the time between the last TTI containing a transport block on the old DPCH and the time the UE starts transmission of the new uplink DPCCH, shall be less than the value in table 5.1A. There is different requirement on the interruption time depending on if the cell is known or not.

A cell shall be regarded as known by the UE if

it has been measured during the last 5 seconds or

a dedicated connection existed between the UE and the cell during the last 5 seconds.

Table 5.1A: TDD/ TDD handover – interruption time

cell in the handover command message	Maximum delay [ms]	
	Known Cell	Unknown Cell
1	[40]	[350]

The interruption time includes the time that can elapse till the appearance of the channel required for the synchronisation. And the time that can elapse till the appearance of the DwPTS in which the new uplink SYNC1 shall be transmitted ,or in case of high chip rate TDD the new uplink DPCH, shall be transmitted , which can be up to one frame (10ms).

The requirement in Table 5.1A for the cell shall apply if the signal quality of the unknown cell is good enough for successful synchronisation with one attempt.

NOTE: One synchronisation attempt can consist of coherent averaging using several frames.

5.2 TDD/FDD Handover

5.2.1 Introduction

The purpose of TDD/FDD handover is to change the mode between FDD and TDD.

The handover procedure is initiated from UTRAN with a handover command message , refer to TS25.331. The handover procedure causes the UE to change its frequency.

5.2.2 Requirements

These requirements shall apply only to TDD/FDD UE.

The requirements do not apply if FDD macro-diversity is used.

5.2.2.1 Handover delay

5.2.2.1.1 3.84 Mcps TDD option

Procedure delay for all procedures, that can command a hard handover, are specified in [TS25.331 section 11.5].

When the UE receives a RRC message implying hard handover with the activation time "now" or earlier than D_{handover} seconds from the end of the last TTI containing the RRC command, the UE shall be ready to start the transmission of the new uplink DPCCH within D_{handover} seconds from the end of the last TTI containing the RRC command.

If the access is delayed to an indicated activation time later than D_{handover} seconds from the end of the last TTI containing the RRC command, the UE shall be ready to start the transmission of the new uplink DPCCH at the designated activation time.

where:

D_{handover} equals the RRC procedure delay defined in TS25.331 Section 13.5.2 plus the interruption time stated in section 5.2.2.2 plus the time required for any kind of baseband or RF reconfiguration due to the change of the UTRAN mode.

5.2.2.1.2 1.28 Mcps TDD option

When the UE receives a RRC message that implies a handover, with the activation time "now" or earlier than D_{handover} seconds from the end of the last TTI containing the RRC command, the UE shall be ready to start the transmission of the new uplink DPCCCH within D_{handover} seconds from the end of the last TTI containing the RRC command.

If the access is delayed to an indicated activation time later than D_{handover} seconds from the end of the last TTI containing the RRC command, the UE shall be ready to start the transmission of the new uplink DPCCCH at the designated activation time.

where:

D_{handover} equals the RRC procedure delay defined in TS25.331 Section 13.5.2 plus the interruption time stated in section 5.2.2.2.2 plus the time required for any kind of baseband or RF reconfiguration due to the change of the UTRAN mode.

5.2.2.2 Interruption time

5.2.2.2.1 3.84 Mcps TDD option

The interruption time, i.e. the time between the end of the last TTI containing a transport block on the old DPCCCH and the time the UE starts transmission of the new uplink DPCCCH. The interruption time shall be less than the value in table 5.2.

There is different requirement on the interruption time depending on if the cell is known or not.

The definition of known cell can be found in section 5.1.2.2.

Table 5.2 TDD/FDD interruption time

cell present in the handover command message	Maximum delay [ms]	
	Known Cell	Unknown cell
1	[100]	[350]

The interruption time includes the interruption uncertainty when changing the timing from the old TDD to the new FDD cell, which can be up to one frame (10ms) and the time required for measuring the downlink DPCCCH channel as stated in TS 25.214 section 4.3.1.2 into account.

The requirement in Table 5.2 for the unknown cell shall apply if the signal quality of the unknown cell is good enough for successful synchronisation with one attempt.

5.2.2.2.2 1.28 Mcps TDD option

The interruption time, i.e. the time between the end of the last TTI containing a transport block on the old DPCCCH and the time the UE starts transmission of the new uplink DPCCCH, shall be less than the value in table 5.2A

There is different requirement on the depending on if the cell is known or not.

Table 5.2A: 1.28 Mcps TDD/FDD interruption time

cell in the handover command message	Maximum update delay [ms]	
	Known Cell	Unknown Cell
1	[100]	[350]

The interruption time includes the interruption uncertainty when changing the timing from the old 1.28 Mcps TDD OPTION to the new FDD cell, which can be up to one frame (10ms) and the time required for measuring the downlink DPCCCH channel as stated in TS 25.214 section 4.3.1.2 into account.

The requirement in Table 5.2A for the unknown cell shall apply if the signal quality of the unknown cell is good enough for successful synchronisation with one attempt.

5.3 TDD/GSM Handover

In the early days of UMTS deployment it can be anticipated that the service area will not be as contiguous and extensive as existing second generation systems. It is also anticipated that UMTS network will be an overlay on the 2nd generation network and utilize the latter, in the minimum case, as a fall back to ensure continuity of service and maintain a good QoS as perceived by the user.

5.3.1 Introduction

The purpose of inter-RAT handover from UTRAN TDD to GSM is to transfer a connection between the UE and UTRAN TDD to GSM. The handover procedure is initiated from UTRAN with a RRC message (HANDOVER FROM UTRAN COMMAND). The procedure is described in TS25.331 section 8.3.7.

5.3.2 Requirements

These requirements shall apply only to TDD/GSM UE.

This clause presents some of the important aspects of GSM handover required to be performed by the UE. For the full specifications reference should be made the GSM Technical Specifications.

The underlying requirement is to ensure continuity of service to the UMTS user. The handover requirements for 3G to GSM should be comparable to GSM to GSM handover requirements.

5.3.2.1 Handover delay

5.3.2.1.1 3.84 Mcps TDD option

When the UE receives a RRC HANDOVER FROM UTRAN COMMAND with the activation time "now" or earlier than the value in Table 5.3 from the end of the last TTI containing the RRC command, the UE shall be ready to transmit (as specified in GSM 05.10) on the new channel of the new RAT within the value in Table 5.3 from the last TTI containing the RRC command. If the access is delayed to an indicated activation time later than the value in Table 5.3 from the end of the last TTI containing the RRC command, the UE shall be ready to transmit (as specified in GSM 05.10) on the channel of the new RAT at the designated activation time.

The UE shall process the RRC procedures for the RRC HANDOVER FROM UTRAN COMMAND within 50 ms. If the activation time is used, it corresponds to the CFN of the UTRAN channel.

Table 5.3: TDD/GSM handover –handover delay

UE synchronisation status	handover delay [ms]
The UE has synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received	90
The UE has not synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received	190

5.3.2.1.2 1.28 Mcps TDD option

When the UE receives a RRC HANDOVER COMMAND with the activation time "now" or earlier than the value in Table 5.3A from the end of the last TTI containing the RRC command, the UE shall be ready to transmit (as specified in GSM 45.010) on the new channel within the new RAT within the value in Table 5.3A from the last TTI containing the RRC command. If the access is delayed to an indicated activation time later than the value in Table 5.3A from the end of the last TTI containing the RRC command, the UE shall be ready to transmit (as specified in GSM 45.010) on the channel of the new RAT at the designated activation time.

The UE shall process the RRC procedures for the RRC HANDOVER FROM UTRAN COMMAND within 50 ms. If the activation time is used, it corresponds to the CFN of the UTRAN channel.

Table 5.3.A: 1.28 Mcps TDD/GSM handover –handover delay

UE synchronisation status	handover delay [ms]
The UE has synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received	90
The UE has not synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received	190

5.3.2.2 Interruption time

5.3.2.2.1 3.84 Mcps TDD option

The interruption time, i.e. the time between the end of the last TTI containing a transport block on the old channel and the time the UE is ready to transmit on the new channel, shall be less than the value in Table 5.4. The requirement in Table 5.4 for the case, that UE is not synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received, is valid when the signal quality of the GSM cell is good enough for successful synchronisation with one attempt.

Table 5.4: TDD/GSM handover - interruption time

Synchronisation status	Interruption time [ms]
The UE has synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received	40
The UE has not synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received	140

5.3.2.2.2 1.28 Mcps TDD option

The interruption time, i.e. the time between the end of last TTI containing a transport block on the old channel and the time the UE is ready to transmit on the new channel, shall be less than the value in Table 5.4A. The requirement in Table 5.4A for the case, that UE is not synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received, is valid when the signal quality of the GSM cell is good enough for successful synchronisation with one attempt.

Table 5.4A: TDD/GSM handover - interruption time

Synchronisation status	Interruption time [ms]
The UE has synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received	40
The UE has not synchronised to the GSM cell before the HANDOVER FROM UTRAN COMMAND is received	140

5.4 Cell Re-selection in Cell_FACH

5.4.1 Introduction

When a Cell Re-selection process is triggered according to 25.331, the UE shall evaluate the cell re-selection criteria specified in TS 25.303, based on radio measurements, and if a better cell is found that cell is selected.

5.4.2 Requirements

The UE shall measure all cells that are in the monitored set signalled by the network it has capability for.

The measurements on inter-frequency and inter-RAT cells shall be performed during the idle timeslots. In addition in case of TDD inter-frequency cells measurement occasions according to TS25.331 section 8.5.11 may be used. The use of the measurement occasions for inter-frequency TDD cells is indicated if the P-CCPCH of the target cell is in parallel with the own FACH slot.

If several TDD cells require the measurement occasions the time shall be equally shared between these cells.

5.4.2.1 Measurements

The UE measurement capability according to section 8.1.2.1 shall apply.

A UE shall measure all cells indicated in the measurement control information it has capability for at least

-once every 5 seconds in case of UTRAN cells

$$T_{\text{Measurement,period_UTRAN}} = 5 \text{ sec}$$

- once every 2,5seconds in case of GSM cells.

$$T_{\text{Measurement,period_GSM}} = 2.5 \text{ sec}$$

NOTE: This shall only apply for inter-frequency TDD cells if sufficient measurement occasions according to TS25.331 are provided for the cells this is required for.

The same requirements on the signal level and quality measure indicating a cell re-selection for the intra-frequency, inter-frequency and inter-RAT case as in idle mode shall apply.

The times required for the identification of a cell according to section 8 shall also apply.

5.4.2.2 Cell re-selection delay

When the UE is camped in Cell_FACH state on one of the cells, the UE shall be capable of re-selecting a new cell according the cell re-selection criteria.

5.4.2.2.1 Intra-frequency cell re-selection

The cell re-selection delay in CELL_FACH state for intra frequency cells shall be less than:

$$T_{\text{reselection,intra}} = T_{\text{identify,intra}} + T_{\text{Measurement period_UTRAN}} + 40\text{ms} + T_{\text{SI}}$$

where

40ms time required for the synchronisation

$T_{\text{identify_intra}}$ =Specified in 8.1.2.2.1.

$T_{\text{Measurement,period_UTRAN}}$ =Specified in 5.4.2.1

T_{SI} =Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell.

This requirement assumes radio conditions to be sufficient, so reading of system information can be done without errors.

5.4.2.2.2 Inter-frequency TDD cell re-selection

The cell re-selection delay in CELL_FACH state for inter-frequency TDD cells shall be less than:

$$T_{\text{reselection,TDD,inter}} = T_{\text{identify,inter}} + T_{\text{Measurement period_UTRAN}} + 40\text{ms} + T_{\text{SI}}$$

where

40ms time required for the synchronisation

$T_{\text{identify_inter}}$ =Specified in 8.1.2.3.1.

$T_{\text{Measurement period_UTRAN}}$ =Specified in 5.4.2.1

T_{SI} =Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell.

This requirement assumes radio conditions to be sufficient, so reading of system information can be done without errors.

NOTE: This requirement shall only apply if sufficient measurement occasions according to TS25.331 section 8.5.11 are available if this is required.

5.4.2.2.3 Inter-frequency FDD cell re-selection

The cell re-selection delay in CELL_FACH state for inter-frequency FDD cells shall be less than:

$$T_{\text{reselection, FDD}} = T_{\text{identify, FDD}} + T_{\text{Measurement period_UTRAN}} + [40ms] + T_{SI}$$

where

[40ms] time required for the synchronisation

$T_{\text{identify, FDD}}$ =Specified in 8.1.2.4.2.

$T_{\text{Measurement period_UTRAN}}$ =Specified in 5.4.2.1

T_{SI} =Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell.

5.4.2.2.4 Inter-RAT cell re-selection

The cell re-selection delay in CELL_FACH state for inter-RAT cells shall be less than:

$$T_{\text{reselection, GSM}} = T_{\text{identify, abort, GSM}} + 4 \cdot T_{\text{Measurement period_GSM}} + 40ms + T_{SI}$$

where

40ms time required for the synchronisation

$T_{\text{identify, abort, GSM}}$ =Specified in 8.1.2.4.

$T_{\text{Measurement, period_GSM}}$ =Specified in 5.4.2.1

T_{SI} =Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell.

This requirement assumes radio conditions to be sufficient, so reading of system information can be done without errors.

NOTE: The UE shall measure each GSM cell indicated in the monitored set once every 2,5 seconds.

The UE shall maintain a running average of 4 measurements for each GSM cell.

5.4.2.3 Interruption in FACH message reception Measurements

The UE shall not interrupt the FACH message reception during measurements required for cell re-selection except in TDD inter-frequency measurements during the specified measurement occasions according to TS25.331 section 8.5.11 if FACH messages are transmitted during the defined measurement occasions.

The UE shall not interrupt the FACH message reception during the evaluation process of a cell required for a cell re-selection.

In case the UE reselects a cell in Cell_FACH state the time the UE is not able to receive FACH messages shall be less than:

$$T_{\text{FACH_interrupt}} = 50ms + \text{MAX} \{ T_{\text{rep, reselection}}, T_{\text{rep_FACH_indication}} \} + T_{\text{cell_update}}$$

Where:

- $T_{\text{FACH_interrupt}}$ Is the time between the UE is not able to listen to FACH messages in the old cell and the point in time the UE listens to the FACH slot/messages in the new cell.
- 50 ms Are required to synchronise to the new cell (40ms) and the time that can elapse till the slot appears containing the FACH messages or the interruption uncertainty when changing the timing from the old TDD to the new FDD cell.
- $\text{MAX} \{T_{\text{rep, reselection}}, T_{\text{rep_FACH_indication}}\}$ Is the maximum of the repetition period of the system information blocks required for the cell re-selection on the target cell and the system information indicating the position of the FACH slot in case of TDD, or a similar information how to acquire the FACH messages in case of FDD or GSM.

This requirement assumes sufficient radio conditions so that synchronisation and reading the system information can be done without errors.

5.5 Cell Re-selection in Cell_PCH

5.5.1 Introduction

When a Cell Re-selection process is triggered according to 25.331, the UE shall evaluate the cell re-selection criteria specified in TS 25.303, based on radio measurements, and if a better cell is found that cell is selected.

5.5.2 Requirements

5.5.2.1 3.84 Mcps option

Requirements for cell re-selection in Cell_PCH state are the same as for cell re-selection in idle mode, see section 4.2. The UE shall support all DRX cycle lengths in table 4.1, according to TS25.331.

5.5.2.2 1.28 Mcps option

Same requirements as for cell re-selection in idle mode shall apply.

5.6 Cell Re-selection in URA_PCH

5.6.1 Introduction

When a Cell Re-selection process is triggered according to 25.331, the UE shall evaluate the cell re-selection criteria specified in TS 25.303, based on radio measurements, and if a better cell is found that cell is selected.

5.6.2 Requirements

5.6.2.1 3.84 Mcps option

Requirements for cell re-selection in URA_PCH state are the same as for cell re-selection in idle mode, see section 4.2. The UE shall support all DRX cycle lengths in table 4.1, according to TS25.331.

5.6.2.2 1.28 Mcps option

Same requirements as for cell re-selection in idle mode shall apply.

6 Dynamic channel allocation

6.1 Introduction

The channel assignment algorithm will be implemented on network side in the RNC. It will be distributed, interference adapted approach where each base station makes the channel assignment based on local signal strength measurements performed in the UE and the Node B. A priori knowledge about the used channels of the other base stations in the vicinity can be implicitly used without additional signalling traffic.

6.2 Implementation requirements

The purpose of DCA is on one side the limitation of the interference (keeping required QoS) and on the other side to maximise the system capacity due to minimising reuse distance. The details on channel assignment policy are given in [12].

6.3 Number of timeslots to be measured

6.3.1 3.84 Mcps TDD option

The number of down link timeslots to be measured in the UE is broadcasted on the BCH in each cell. In general, the number of downlink timeslots in question will be less than 14, but in worst case the UE shall be capable to measure 14 downlink timeslots. In case of "simple UE" [FFS] timeslots shall at least be measured.

6.3.2 1.28 Mcps TDD option

The number of down link timeslots to be measured in the UE is broadcasted on the BCH in each cell. In general, the number of downlink timeslots in question will be less than [6], but in worst case the UE shall be capable to measure [6] downlink timeslots. In case of "simple UE [FFS] timeslots shall at least be measured.

6.4 Measurement reporting delay

In order to save battery life time, in idle mode no measurements are performed for DCA. ISCP measurements are started at call establishment. Taking into account that the measured interference of the timeslots is preferable averaged over [FFS] frames, the measurement reporting delay in connecting phase shall not exceed [FFS] milliseconds.

7 Timing characteristics

7.1 Timing Advance (TA) requirements

7.1.1 3.84 Mcps TDD option

To update timing advance of a moving UE the UTRAN measures "RX Timing deviation". The measurements are reported to higher layers, where timing advance values are calculated and signaled to the UE. The measurement for timing advance is defined in 3GPP TS25.225 "Physical Layer Measurements (TDD)", the requirements on the measurement is specified in clause 11.2.9 "RX Timing Deviation". The UE shall adjust the timing of its transmissions within ± 0.5 chip of the signalled timing advance value.

7.1.2 1.28 Mcps TDD option

For 1.28 Mcps TDD the timing advance in the UE is adjusted by means of uplink synchronization. For the random access procedure the node B commands the UE to adjust its synchronisation shift by means of signalling the received

position of the UpPTS in the FPACH. During the connection the node B measures the timing in the uplink and transmits a SS (Synchronization Shift) command to the UE at least once per sub-frame.

These SS commands determined whether the UE synchronization shift is either left unchanged, or adjusted 1 step up or 1 step down. The step size of the SS adjustment is $(k/8)T_c$ where $k (=1,2, \dots,8)$ is signalled by higher layer signalling.

7.1.2.1 Uplink synchronization control requirements for UE for 1.28 Mcps TDD option

Uplink synchronization control is the ability of the UE transmitter to adjust its TX timing in accordance with one or more SS commands received in the downlink.

7.1.2.1.1 Uplink synchronization control steps

The SS step is the change in UE transmission timing in response to a single SS command, SS_cmd, received by the UE.

7.1.2.1.1.1 Minimum requirement

The UE transmitter shall have the capability of changing the transmission timing with a step size of 1/8, 2/8, 3/8, ..., 1 chip according to the value of Δ_{SS} , $n=(1,2,\dots,14)$ time slot after the SS_cmd arrived (closed loop). For the open loop any step being a multiple of 1/8 chip has to be allowed.

- (a) The minimum transmission timing step $\square_{SS,min}$ due to closed loop uplink synchronization control shall be within the range shown in Table 7.1.
- (b) In case uplink synchronization control implies to perform a bigger step than the minimum step the UE shall perform the a multiple number of minimum steps m . Within the implementation grid of the applicable timing steps of the UE the step being closest to the required step should be executed.

Table 7.1: Uplink synchronisation control range

SS_cmd	Uplink synchronisation control range for minimum step	
	1/8 chip step size	
	Lower	Upper
Up	1/9 chip – 0.1 ppm	1/7 chip + 0.1 ppm
Down	1/9 chip – 0.1 ppm	1/7 chip + 0.1 ppm

7.1.2.1.2 Timing Advance (T_{ADV}) for 1.28 Mcps TDD

This measurement refers to TS25.225 subsection 5.1.14.

7.1.2.1.2.1 Accuracy requirements

Table 7.2

Parameter	Unit	Accuracy	Conditions
			Range [chips]
Timing Advance	Chips period	+/- 0.125	0, ..., 255.875

7.1.2.1.2.2 Range/mapping

The reporting range for *Timing Advance* is from 0 ... 255.875 chips.

In table 7.3 the mapping of the measured quantity is defined. The signalling range may be larger than the guaranteed accuracy range.

Table 7.3

Reported value	Measured quantity value	Unit
TIMING_ADVANCE_0000	Timing Advance < 0	chip
TIMING_ADVANCE_0001	$0 \leq \text{Timing Advance} < 0.125$	chip
TIMING_ADVANCE_0002	$0.125 \leq \text{Timing Advance} < 0.25$	chip
...
TIMING_ADVANCE_1024	$127.875 \leq \text{Timing Advance} < 128$	chip
...
TIMING_ADVANCE_2045	$255.625 \leq \text{Timing Advance} < 255.75$	chip
TIMING_ADVANCE_2046	$255.75 \leq \text{Timing Advance} < 255.875$	chip
TIMING_ADVANCE_2047	$255.875 \leq \text{RX Timing Advance}$	chip

NOTE: This measurement can be used for timing advance (synchronisation shift) calculation for uplink synchronisation or location services.

7.2 Cell synchronization accuracy

7.2.1 Definition

Cell synchronization accuracy is defined as the maximum deviation in frame start times between any pair of cells that have overlapping coverage areas.

7.2.2 Minimum requirements

The cell synchronization accuracy shall be better than or equal to 3 μ s.

8 UE Measurements Procedures

8.1 Measurements in CELL_DCH State (3.84 Mcps option)

8.1.1 Introduction

This section contains requirements on the UE regarding measurement reporting in CELL_DCH state. The requirements are split in TDD intra frequency, TDD inter frequency, FDD and GSM measurements. These measurements may be used by the UTRAN, e.g. for handover decisions. The measurements are defined in TS 25.225, the measurement model is defined in TS 25.302 and measurement accuracies are specified in section 9. Control of measurement reporting is specified in TS 25.331 and parallel measurements are specified in section 8.2. For the description of the idle intervals see TS 25.225, Annex A.

8.1.2 Requirements

8.1.2.1 UE Measurement Capability

The UE shall be able to support and process up to

32 intra frequency TDD cells, and

32 inter frequency TDD cells, distributed on up to 2 additional TDD carriers.

Depending on UE capability, the UE shall also in addition be able to support and process 32 FDD cells, distributed on up to 3 FDD carriers.

Depending on UE capability, the UE shall also in addition be able to support and process at least 32 GSM cells distributed on up to 32 GSM carriers.

Performance requirements for different types of measurements and different number of cells are defined in the following sections.

The requirements in section 9 are applicable for a UE performing measurements according to this section.

8.1.2.2 TDD intra frequency measurements

During the CELL_DCH state the UE shall continuously measure detected intra frequency cells and search for new intra frequency cells in the monitoring set. In case the network requests the UE to report unlisted cells, the UE shall also search for intra frequency cells outside the monitored set. Intra frequency measurements can be performed (simultaneously to data reception from the active cell) in all time slots not allocated to transmission nor the time used for inter frequency measurements.

8.1.2.2.1 Identification of a new cell

The UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify intra}} = \text{Max} \left\{ 800, T_{\text{basic identify TDD, intra}} \cdot \frac{T_{\text{Measurement Period, Intra}}}{T_{\text{Intra}}} \right\} \text{ms}$$

8.1.2.2.2 UE P-CCPCH measurement capability

In the CELL_DCH state the measurement period for intra frequency measurements is 200 ms. When no inter frequency measurement is scheduled, the UE shall be capable of performing P-CCPCH measurements for 6 detected intra-frequency cells and the UE physical layer shall be capable of reporting measurements to higher layers with the measurement period of 200 ms. The measurement accuracy for all measured cells shall be as specified in the section 9.

$$Y_{\text{measurement intra}} = \text{Floor} \left\{ X_{\text{basic measurement TDD}} \cdot \frac{T_{\text{Intra}}}{T_{\text{Measurement Period, Intra}}} \right\}$$

whereby function Floor(x) takes the integer part of x.

$$X_{\text{basic measurement TDD}} = 6$$

$T_{\text{Measurement Period, Intra}} = 200$ ms. The measurement period for Intra frequency P-CCPCH measurements.

T_{Intra} : This is the minimum time that is available for intra frequency measurements, during the measurement period with an arbitrarily chosen timing. It is assumed for the requirement that the slot allocation allows measurement windows to be of minimum duration necessary to perform the measurements.

$T_{\text{basic identify TDD, intra}} = 800$ ms. This is the time period used in the intra frequency equation where the maximum allowed time for the UE to identify a new TDD cell is defined. (side conditions are defined in subclause 8.1.2.6).

8.1.2.2.3 Periodic Reporting

Reported measurements contained in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.2.4 Event-triggered Periodic Reporting

Reported measurements contained in event triggered periodic measurement reports shall meet the requirements in section 9.

The first report in event triggered periodic measurement reporting shall meet the requirements specified in section 8.1.2.2.5 Event Triggered Reporting.

8.1.2.2.5 Event Triggered Reporting

Reported measurements contained in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

The measurement reporting delay is defined as the time from when a report is triggered at the physical layer according to the event, until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH.

Editors Note: The test cases in section A.8 will need revisions to reflect the general requirements.

Unless otherwise stated, event triggered measurement reporting delay shall be less than 480 ms.

8.1.2.3 TDD inter frequency measurements

When signalled by the network during CELL_DCH state, the UE shall continuously measure detected inter frequency cells and search for new inter frequency cells indicated in the measurement control information.

8.1.2.3.1 Identification of a new cell

The UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify_inter}} = \text{Max} \left\{ 5000, T_{\text{basic_identify_TDD,inter}} \cdot \frac{T_{\text{Measurement_Period,Inter}}}{T_{\text{Inter}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

8.1.2.3.2 Measurement period

When TDD inter frequency measurements are scheduled, the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in section 9 with measurement period given by

$$T_{\text{measurement_inter}} = \text{Max} \left\{ 480, T_{\text{basic_measurement_TDD_inter}} \cdot \frac{T_{\text{Measurement_Period,Inter}}}{T_{\text{Inter}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

In case of a dual receiver UE, the measurement period for inter frequency measurements is 480 ms.

$T_{\text{Measurement_Period_Inter}} = 480$ ms. The period used for calculating the measurement period $T_{\text{measurement_inter}}$ for inter frequency P-CCPCH measurements.

T_{Inter} : This is the minimum time available for inter frequency measurements during the period $T_{\text{Measurement_Period_inter}}$ with an arbitrarily chosen timing. The minimum time depends on the channel allocation whereby HW settling time and synchronisation time has to be taken into account (for the description of the idle intervals see Annex A of 25.225). It is assumed for the requirement that the slot allocation allows measurement windows in the idle periods to be of minimum duration necessary to perform the measurements.

$T_{\text{basic_identify_TDD,inter}} = 5000$ ms. This is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new TDD cell is defined. (side conditions are defined in subclause 8.1.2.6).

$T_{\text{basic_measurement_TDD_inter}} = 200$ ms. This is the time period used in the equation for defining the measurement period for inter frequency P-CCPCH measurements.

$N_{\text{Freq}} \leq 3$ Number of TDD frequencies indicated in the measurement control information.

Note: It is still under consideration how to incorporate a time needed for adjusting asynchronous timing between intra and inter frequency measurement periods and UE HW settling time into the equations.

8.1.2.3.3 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.3.4 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in section 9.

The UE shall not send any event triggered measurement reports, as long as the reporting criteria is not fulfilled.

The measurement reporting delay is defined as the time from when a report is triggered at the physical layer according to the event, until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH.

The measurement reporting delay shall be less than [5] seconds.

8.1.2.4 FDD measurements

The requirements in this section apply only to UE supporting both TDD and FDD mode.

In the CELL_DCH state when FDD inter frequency measurements are scheduled the UE shall continuously measure detected inter frequency FDD cells and search for new inter frequency cells indicated in the measurement control information.

The UE shall be capable of measuring the requested measurement quantity of at least 32 cells on a maximum of 3 frequencies.

8.1.2.4.1 Identification of a new cell

The UE shall be able to identify a new detectable cell belonging to the monitored set within

$$T_{\text{identify FDD inter}} = \text{Max} \left\{ [5000], T_{\text{basic identify FDD inter}} \cdot \frac{T_{\text{Measurement Period FDD inter}}}{T_{\text{FDD inter}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

8.1.2.4.2 Measurement period

When FDD inter frequency measurements are scheduled, the UE physical layer shall be capable of reporting measurements to higher layers with measurement accuracy as specified in sub-clause 9 with measurement period given by

$$T_{\text{measurement FDD inter}} = \text{Max} \left\{ [480], T_{\text{basic measurement FDD inter}} \cdot \frac{T_{\text{Measurement Period FDD inter}}}{T_{\text{FDD inter}}} \cdot N_{\text{Freq}} \right\} \text{ms}$$

$T_{\text{Measurement_Period FDD inter}} = [480]$ ms. The period used for calculating the measurement period $T_{\text{measurement_FDD inter}}$ for inter frequency CPICH measurements.

$T_{\text{FDD inter}}$: This is the minimum time that is available for inter frequency measurements, during the period $T_{\text{Measurement_Period FDD inter}}$ with an arbitrarily chosen timing. The minimum time depends on the channel allocation whereby HW settling time and synchronisation time has to be taken into account (for the description of the idle intervals see Annex A of 25.225). It is assumed for the requirement that the slot allocation allows measurement windows in the idle periods to be of minimum duration necessary to perform the measurements.

$T_{\text{basic_identify_FDD,inter}} = \text{TBD}$ ms. This is the time period used in the inter frequency equation where the maximum allowed time for the UE to identify a new FDD cell is defined.

$T_{\text{basic_measurement_FDD inter}} = \text{TBD}$ ms. This is the time period used in the equation for defining the measurement period for inter frequency CPICH measurements.

$N_{\text{Freq}} \leq 3$ Number of FDD frequencies indicated in the measurement control information.

8.1.2.4.3 Periodic Reporting

Reported measurements in periodically triggered measurement reports shall meet the requirements in section 9.

8.1.2.4.4 Event Triggered Reporting

Reported measurements in event triggered measurement reports shall meet the requirements in section 9.

Editors note: The measurement accuracy in combination with event triggered reporting is an open issue and the above sentence shall be revised when this is settled.

The UE shall not send event triggered measurement reports as long as the reporting criteria are not fulfilled.

The measurement reporting delay is defined as the time from when a report is triggered at the physical layer according to the event until the UE starts to transmit the measurement report over the Uu interface. This requirement assumes that the measurement report is not delayed by other RRC signalling on the DCCH. This measurement reporting delay excludes a delay uncertainty resulted when inserting the measurement report to the TTI of the uplink DCCH. The delay uncertainty is twice the TTI of the uplink DCCH.

The measurement reporting delay shall be less than [5] seconds.

8.1.2.5 GSM measurements

The requirements in this section applies only to UE supporting TDD and GSM.

When signalled by UTRAN during CELL_DCH state, the UE shall continuously measure GSM cells and search for new GSM cells given in the monitored set.

Measurements on a GSM cell can be requested with BSIC verified or BSIC non-verified.

If BSIC verified is requested for a GSM cell the UE shall only report measurement quantities for that GSM cell with a BSIC "verified". If BSIC verification is not required for a GSM cell the UE shall report measurement quantities for that GSM cell irrespectively if the BSIC has been verified or not verified.

For the UE performing GSM measurements, the requirements in GSM 05.08 shall apply.

8.1.2.5.1 GSM carrier RSSI

An UE supporting GSM measurements shall be able to measure GSM carrier RSSI levels of GSM cells from the monitored set with acquisition speed defined in table 8.1. In the CELL_DCH state the measurement period for the GSM carrier RSSI measurement is 480 ms.

The UE shall meet the measurement accuracy requirements stated for RXLEV in GSM 05.08, when the given measurement time allows the UE to take the same amount of GSM carrier RSSI samples as stated in the GSM specification during the measurement period.

Table 8.1

Idle Interval Length (slots)	Number of GSM carrier RSSI measurements.
4	1
5	2
>5	≥3

In the calculation of the number of GSM carrier measurements based on the the idle interval length, the switching time [600 us] is already taken into account. For the description of the idle intervals see Annex A of 25.225.

In case the UE is not able to acquire the required number of samples per GSM carrier during one measurement period, the UE shall measure as many GSM carriers as possible during that measurement period using at least 3 samples per GSM carrier. The GSM carriers that were not measured during that measurement period shall be measured in the

following measurement periods. This means that, in this particular case, the L1 reporting period to higher layers of a GSM neighbour can be a multiple of the measurement period.

8.1.2.5.2 BSIC verification

The procedure for UE measurements on a GSM cell with BSIC verified requested can be divided in the following two tasks:

1) Initial BSIC identification

Includes searching for the BSIC and decoding the BSIC for the first time when there is no knowledge about the relative timing between the FDD and GSM cell. The UE shall trigger the initial BSIC identification within the available idle intervals as specified in TS 25.225, Annex A (Fig. A.1). The requirements for Initial BSIC identification can be found in 8.1.2.5.2.1 Initial BSIC identification

2) BSIC re-confirmation

Tracking and decoding the BSIC of a GSM cell after initial BSIC identification is performed. The UE shall trigger the BSIC re-confirmation within the available idle intervals as specified in TS 25.225, Annex A (Fig. A.1). The requirements for Initial BSIC identification can be found in 8.1.2.5.2.2 BSIC re-confirmation

Measurements on a GSM cell can be requested with BSIC verified or BSIC non-verified. If GSM measurements are requested with BSIC verified the UE shall be able to report the GSM cells with BSIC verified for those cells where the verification of BSIC has been successful.

The BSIC of a GSM cell is considered to be “verified” if the UE has decoded the SCH of the BCCH carrier and identified the BSIC at least one time (initial BSIC identification) and from that moment the BSIC shall be re-confirmed at least once every $T_{\text{re-confirm abort}}$ seconds. Otherwise the BSIC of the GSM cell is considered as “non-verified”. The time requirement for initial BSIC identification, $T_{\text{identify abort}}$, and the BSIC re-confirmation interval $T_{\text{re-confirm abort}}$ can be found in the sections below.

The worst-case time for identification of one previously not identified GSM cell measurement is specified in TS 25.225, Annex A.

The UE shall be able to perform BSIC verification at levels down to the reference sensitivity level or reference interference levels as specified in GSM 45.005.

8.1.2.5.2.1 Initial BSIC identification

This measurement is performed in the idle intervals as specified in TS 25.225, Annex A (Fig. A.1).

For GSM cells that are requested with BSIC verified the UE shall attempt to decode the SCH on the BCCH carrier of at least [6] GSM cells indicated in the measurement control information. The UE shall give priority for synchronisation attempts in decreasing signal strength order. The UE shall be able to perform initial BSIC identification on one new GSM cell within the time specified in Annex A in TS 25.225.

When N new GSM cells are to be BSIC identified the time is changed to $N * T_{\text{identify abort}}$, with

$T_{\text{identify abort}} = [5000]$ ms. This is the time necessary to identify one new GSM cell. It is assumed for the requirement that the slot allocation allows measurement windows in the idle periods to be of minimum duration necessary to perform the measurements.

If the BSIC of a GSM cell has been successfully identified the UE shall continue BSIC identification with the next cell, in signal strength order, for at least the [6] strongest GSM cells with unknown BSIC. The GSM cell for which the BSIC has been successfully identified shall be moved to the BSIC re-confirmation procedure.

If the UE has not successfully identified the BSIC within $T_{\text{identify abort}}$, the UE shall abort the BSIC identification attempts for that GSM cell. The UE shall continue to try to perform BSIC identification on the next GSM cell in signal strength order. The GSM cell for which the BSIC identification failed shall not be re-considered for BSIC identification until BSIC identification attempts have been made for all the rest of the [6] strongest GSM cells with unknown BSIC in the monitored set.

8.1.2.5.2.2 BSIC re-confirmation

The requirements of this section are applicable for BSIC re-confirmation.

This measurement shall be based on the idle intervals as specified in TS 25.225, Annex A (Fig. A.1). The time requirement for BSIC re-confirmation is specified in Annex A in TS 25.225.

The UE shall maintain the timing information of at least [6] identified GSM cells. Initial timing information is obtained from the initial BSIC identification. The timing information shall be updated every time the BSIC is decoded.

If more than one BSIC can be decoded within the same measurement window given by the idle intervals, priority shall be given to the least recently decoded BSIC.

If the UE fails to decode the BSIC after two successive attempts or if the UE has not been able to re-confirm the BSIC for a GSM cell within $T_{\text{re-confirm_abort}}$ seconds, the UE shall abort the BSIC re-confirmation attempts for that GSM cell. The GSM cell shall be treated as a new GSM cell with unidentified BSIC and the GSM cell shall be moved to the initial BSIC identification procedure, see section 8.1.2.5.2.1. The UE shall be able to make BSIC re-confirmation attempts for the [6] strongest GSM cells in the monitored list.

$T_{\text{re-confirm_abort}} = [5000]$ ms. This is the BSIC reconfirmation interval.

It is assumed for the requirement that the slot allocation allows measurement windows in the idle periods to be of minimum duration necessary to perform the measurements.

8.1.2.6 TDD Synchronisation to new cells

Time for synchronisation to new cell is defined as the time from when the cell appears until the time when the cell is reported in a RRC message to the network. The time needed to synchronise depends on the level of the received signal and is different for inter and intra frequency cells.

These time limits are used in the requirements for the measurements in paragraph 8.1.2 as well as preconditions in paragraph 9.

The requirements given for by $T_{\text{basic identify TDD, intra}}$ and by $T_{\text{basic identify TDD, inter}}$ are valid under the following side conditions:

$$\left(\frac{P - \text{CCPCH} - E_c}{I_o} \right)_{\text{in dB}} \geq -8\text{dB}$$

$$\left(\frac{\text{SCH} - E_c}{I_o} \right)_{\text{in dB}} \geq -13\text{dB}$$

where the received P-CCPCH E_c/I_o is defined as

$$\left(\frac{P - \text{CCPCH} - E_c}{I_o} \right)_{\text{in dB}} = \left(\frac{P - \text{CCPCH} - E_c}{I_{or}} \right)_{\text{in dB}} - \left(\frac{I_o}{\hat{I}_{or}} \right)_{\text{in dB}}$$

and the received SCH E_c/I_o is defined as

$$\left(\frac{\text{SCH} - E_c}{I_o} \right)_{\text{in dB}} = \left(\frac{\text{SCH} - E_c}{I_{or}} \right)_{\text{in dB}} - \left(\frac{I_o}{\hat{I}_{or}} \right)_{\text{in dB}}$$

8.1A Measurements in CELL_DCH State (1.28 Mcps option)

(void)

8.2 Parallel Measurements in CELL_DCH State (3.84 Mcps option)

8.2.1 Introduction

The purpose with this section is to ensure that all UE can handle a certain number of measurements in parallel. The measurements are defined in TS 25.225, the measurement model is defined in TS 25.302 and measurement accuracies are specified in section 9. Control of measurement reporting is specified in TS 25.331 and measurements reporting delays are specified in section 8.1. For the description of the idle intervals see TS 25.225, Annex A.

8.2.2 Requirements

The requirements in section 9 are applicable for a UE performing measurements according to this section.

The UE shall be able to perform parallel measurements according to table 8-2.

In addition to the requirements in table 8-2 the UE shall in parallel, in state CELL_DCH, also be able to measure and report the quantities according to section 8-2.

Table 8.2 Parallel measurement requirements

Measurement quantity	Number of parallel measurements possible to request from the UE
Transport channel BLER	[1] per TrCh
UE transmitted power	[1]
SFN-SFN observed time difference type 2	[]
UE GPS Timing of Cell Frames for UP	[]

Editors Note: The presence of the measurements for location services needs to be revised.

8.2A Parallel Measurements in CELL_DCH State (1.28 Mcps option)

(void)

8.3 Capabilities for Support of Event Triggering and Reporting Criteria

8.3.1 Introduction

This section contains requirements on UE capabilities for support of event triggering and reporting criteria.

The UE can be requested to make measurements under different measurement identity numbers. With each identity number there may be associated multiple number of events. The purpose of this section is to set some limits on the number of different reporting criteria the UE may be requested to track in parallel.

8.3.2 Requirements

In this section reporting criteria can be either event triggered reporting criteria or periodic reporting criteria.

The UE shall be able to support in parallel per category up to E_{cat} reporting criteria according to Table 8.6.

For the measurement categories: Intra-frequency, Inter frequency and Inter-RAT the UE need not support more than 14 reporting criteria in total. For the measurement categories Traffic volume and Quality measurements the UE need not support more than 16 reporting criteria in total.

Table 8-6 Requirements for reporting criteria per measurement category

Measurement category	E _{cat}	Note
Intra-frequency	4	Applicable for periodic reporting or TDD events (1G-1I).
Inter-frequency	6	Applicable for periodic reporting or Event 2A-2F
Inter-RAT	4	Only applicable for UE with this capability
UE internal measurements	8	
Traffic volume measurements	2 + (2 per Transport Channel)	
Quality measurements	2 per Transport Channel	
UP measurements	2	Only applicable for UE with this capability.

8.3A Capabilities for Support of Event Triggering and Reporting Criteria (1.28 Mcps option)

(void)

8.4 Measurements in CELL_FACH State (3.84 Mcps option)

8.4.1 Introduction

This section contains requirements on the UE regarding measurement reporting in CELL_FACH state. The measurements are defined in TS 25.225, the measurement model is defined in TS 25.302 and measurement accuracies are specified in section 9. Control of measurement reporting is specified in TS 25.331 and parallel measurements are specified in section 8.2. For the description of the idle intervals see TS 25.225, Annex A.

8.4.2 Requirements

TBD

8.4A Measurements in CELL_FACH State (1.28 Mcps option)

(void)

9 Measurements performance requirements

One of the key services provided by the physical layer is the measurement of various quantities which are used to trigger or perform a multitude of functions. Both the UE and the UTRAN are required to perform a variety of measurements. The complete list of measurements is specified in 3GPP TS 25.302 "Services Provided by Physical Layer". The physical layer measurements for TDD are described and defined in 3GPP TS 25.225 "Physical layer – Measurements (TDD)". In this clause for TDD, per each measurement the relevant requirements on performance in terms of accuracy are reported.

Unless explicitly stated,

- Reported measurements shall be within defined range in 90 % of the cases.
- Measurement channel is 12,2 kbps as defined in 3GPP TS 25.102 annex A, clause A.3.1. This measurement channel is used both in active cell and cells to be measured.

- Physical channels used as defined in 3GPP TS 25.101 annex B.
- All requirements are defined when UE is in a CELL_DCH or CELL_FACH stage. The difference between modes are the reporting delay. Some of the measurements are not requested to be reported in both stages.
- Cell 1 is the active cell, if not otherwise stated.
- Single task reporting.
- Power control is active.

9.1 Measurements performance for UE

9.1.1 Performance for UE measurements in downlink (RX)

9.1.1.1 P-CCPCH RSCP (TDD)

These measurements consider *P-CCPCH RSCP* measurements for TDD cells.

The measurement period for CELL_DCH state can be found in section 8.

The accuracy requirements in table 9.1 are valid under the following conditions:

- P-CCPCH RSCP ≥ -102 dBm.
- The received signal levels on SCH and P-CCPCH are according the requirements in paragraph 8.1.2.6

9.1.1.1.1 Absolute accuracy requirements

Table 9.1 P-CCPCH_RSCP absolute accuracy

Parameter	Unit	Accuracy [dB]		Conditions Io [dBm]
		Normal condition	Extreme condition	
P-CCPCH_RSCP	dBm	± 6	± 9	-94...-70
	dBm	± 8	± 11	-94...-50

9.1.1.1.2 Relative accuracy requirements

The P-CCPCH_RSCP intra-frequency relative accuracy is defined as the P-CCPCH_RSCP measured from one cell compared to the P-CCPCH_RSCP measured from another cell on the same frequency.

The accuracy requirements in table 9.2 are valid under the following conditions:

- P-CCPCH RSCP_{1,2} ≥ -102 dBm.
- $\left| P - CCPCH RSCP1 \Big|_{in\ dB} - P - CCPCH RSCP2 \Big|_{in\ dB} \right| \leq 20dB$
- The received signal levels on SCH and P-CCPCH are according the requirements in paragraph 8.1.2.6
- It is assumed that the measurements of P-CCPCH RSCP1 and P-CCPCH RSCP2 can be performed within 20ms due to slot allocations in the cells concerned.

Table 9.2 P-CCPCH_RSCP intra-frequency relative accuracy

Parameter	Unit	Accuracy [dB]		Conditions	
		Normal condition	Extreme condition	Io [dBm]	relative RSCP difference [dB]
P-CCPCH_RSCP	dBm	±1	±1	-94...-50	<2
		±2	±2		2...14
		±3	±3		>14

The P-CCPCH_RSCP inter-frequency relative accuracy is defined as the P-CCPCH_RSCP measured from one cell compared to the P-CCPCH_RSCP measured from another cell on a different frequency.

The accuracy requirements in table 9.3 are valid under the following conditions:

- P-CCPCH RSCP_{1,2} ≥ -102 dBm.
- $\left| P - CCPCH RSCP1 \Big|_{in\ dB} - P - CCPCH RSCP2 \Big|_{in\ dB} \right| \leq 20dB$
- The received signal levels on SCH and P-CCPCH are according the requirements in paragraph 8.1.2.6

Table 9.3 P-CCPCH_RSCP inter-frequency relative accuracy

Parameter	Unit	Accuracy [dB]		Conditions
		Normal condition	Extreme condition	Io [dBm]
P-CCPCH_RSCP	dBm	± 3	± 3	-94...-50

9.1.1.1.3 Range/mapping

The reporting range for *P-CCPCH RSCP* is from -115 ...-25 dBm.

In table 9.4 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.4

Reported value	Measured quantity value	Unit
P-CCPCH RSCP_LEV_00	P-CCPCH RSCP <-115	dBm
P-CCPCH RSCP_LEV_01	-115 ≤ P-CCPCH RSCP < -114	dBm
P-CCPCH RSCP_LEV_02	-114 ≤ P-CCPCH RSCP < -113	dBm
...
P-CCPCH RSCP_LEV_89	-27 ≤ P-CCPCH RSCP < -26	dBm
P-CCPCH RSCP_LEV_90	-26 ≤ P-CCPCH RSCP < -25	dBm
P-CCPCH RSCP_LEV_91	-25 ≤ P-CCPCH RSCP	dBm

9.1.1.2 CPICH measurements (FDD)

Note: This measurement is used for handover between UTRA TDD and UTRA FDD.

These measurements consider *CPICH RSCP* and *CPICH Ec/Io* measurements. The requirements in this section are valid for terminals supporting this capability.

The measurement period for CELL_DCH state can be found in section 8.

9.1.1.2.1 CPICH RSCP

9.1.1.2.1.1 Inter frequency measurement relative accuracy requirement

The relative accuracy of CPICH RSCP in the inter frequency case is defined as the CPICH RSCP measured from one cell compared to the CPICH RSCP measured from another cell on a different frequency.

The accuracy requirements in table 9.5 are valid under the following conditions:

- $CPICH_RSCP_{1,2} \geq -114$ dBm.
- $\left| CPICH_RSCP1 \Big|_{in\ dB} - CPICH_RSCP2 \Big|_{in\ dB} \right| \leq 20dB$
- The received signal levels on SCH and CPICH are according the requirements in paragraph 8.1.2.6.
- $|Channel\ 1_Io - Channel\ 2_Io| \leq 20$ dB.

Table 9.5 CPICH_RSCP Inter frequency relative accuracy

Parameter	Unit	Accuracy [dB]		Conditions Io [dBm]
		Normal condition	Extreme condition	
CPICH_RSCP	dBm	± 6	± 6	-94...-50

9.1.1.2.1.2 Range/mapping

The reporting range for *CPICH RSCP* is from 115 ...-25 dBm.

In table 9.6 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.6

Reported value	Measured quantity value	Unit
CPICH_RSCP_LEV_00	CPICH RSCP < -115	dBm
CPICH_RSCP_LEV_01	-115 ≤ CPICH RSCP < -114	dBm
CPICH_RSCP_LEV_02	-114 ≤ CPICH RSCP < -113	dBm
...
CPICH_RSCP_LEV_89	-27 ≤ CPICH RSCP < -26	dBm
CPICH_RSCP_LEV_90	-26 ≤ CPICH RSCP < -25	dBm
CPICH_RSCP_LEV_91	-25 ≤ CPICH RSCP	dBm

9.1.1.2.2 CPICH Ec/Io

9.1.1.2.2.1 Inter frequency measurement relative accuracy requirement

The relative accuracy of CPICH Ec/Io is defined as the CPICH Ec/Io measured from one cell compared to the CPICH Ec/Io measured from another cell on a different frequency.

The accuracy requirements in table 9.7 are valid under the following conditions:

- $CPICH_RSCP \geq -114$ dBm.
- $\left| P - CCPCH_RSCP \Big|_{in\ dB} - CPICH_RSCP \Big|_{in\ dB} \right| \leq 20dB$
- $|Channel\ 1_Io - Channel\ 2_Io| \leq 20$ dB.
- The received signal levels on SCH and CPICH are according the requirements in paragraph 8.1.2.6.

Table 9.7 CPICH Ec/Io Inter frequency relative accuracy

Parameter	Unit	Accuracy [dB]		Conditions Io [dBm]
		Normal condition	Extreme condition	
CPICH_Ec/Io	dBm	± 6	± 6	-94...-50

9.1.1.2.2.2 Range/mapping

The reporting range for *CPICH Ec/Io* is from -24 ...0 dB.

In table 9.8 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.8

Reported value	Measured quantity value	Unit
CPICH_Ec/Io_00	CPICH Ec/Io < -24	dB
CPICH_Ec/Io_01	-24 ≤ CPICH Ec/Io < -23.5	dB
CPICH_Ec/Io_02	-23.5 ≤ CPICH Ec/Io < -23	dB
...
CPICH_Ec/Io_47	-1 ≤ CPICH Ec/Io < -0.5	dB
CPICH_Ec/Io_48	-0.5 ≤ CPICH Ec/Io < 0	dB
CPICH_Ec/Io_49	0 ≤ CPICH Ec/Io	dB

9.1.1.3 Timeslot ISCP

The measurement period for CELL_DCH state can be found in section 8.

9.1.1.3.1 Absolute accuracy requirements

Table 9.9 Timeslot_ISCP Intra frequency absolute accuracy

Parameter	Unit	Accuracy [dB]		Conditions Io [dBm]
		Normal condition	Extreme condition	
Timeslot_ISCP	dB	± 6	± 9	-94...-70
	dB	± 8	± 11	-94...-50

9.1.1.3.2 Range/mapping

The reporting range for *Timeslot ISCP* is from -115...-25 dBm.

In table 9.10 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.10

Reported value	Measured quantity value	Unit
UE_TS_ISCP_LEV_00	Timeslot_ISCP < -115	dBm
UE_TS_ISCP_LEV_01	-115 ≤ Timeslot_ISCP < -114	dBm
UE_TS_ISCP_LEV_02	-114 ≤ Timeslot_ISCP < -113	dBm
...
UE_TS_ISCP_LEV_89	-27 ≤ Timeslot_ISCP < -26	dBm
UE_TS_ISCP_LEV_90	-26 ≤ Timeslot_ISCP < -25	dBm
UE_TS_ISCP_LEV_91	-25 ≤ Timeslot_ISCP	dBm

9.1.1.4 UTRA carrier RSSI

Note: The purpose of measurement is for Inter-frequency handover evaluation.

The measurement period for CELL_DCH state can be found in section 8.

9.1.1.4.1 Absolute accuracy requirement

Absolute accuracy case only one carrier is applied.

Table 9.11 UTRA carrier RSSI Inter frequency absolute accuracy

Parameter	Unit	Accuracy [dB]		Conditions
		Normal condition	Extreme condition	Io [dBm]
UTRA Carrier RSSI	dB	± 4	± 7	-94...-70
	dB	± 6	± 9	-94...-50

9.1.1.4.2 Relative accuracy requirement

Relative accuracy requirement is defined as active cell frequency UTRAN RSSI compared to measured other frequency UTRAN RSSI level

The accuracy requirements in table 9.12 are valid under the following conditions:

- |Channel 1_Io -Channel 2_Io| < 20 dB.

Table 9.12 UTRA carrier RSSI Inter frequency relative accuracy

Parameter	Unit	Accuracy [dB]		Conditions
		Normal condition	Extreme condition	Io [dBm]
UTRA Carrier RSSI	dB	± 5	± 8	-94...-70

9.1.1.4.3 Range/mapping

The reporting range for *UTRA carrier RSSI* is from -100 ...-25 dBm.

In table 9.13 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.13

Reported value	Measured quantity value	Unit
UTRA_carrier_RSSI_LEV_00	UTRA carrier RSSI < -100	dBm
UTRA_carrier_RSSI_LEV_01	-100 ≤ UTRA carrier RSSI < -99	dBm
UTRA_carrier_RSSI_LEV_02	-99 ≤ UTRA carrier RSSI < -98	dBm
...
UTRA_carrier_RSSI_LEV_74	-27 ≤ UTRA carrier RSSI < -26	dBm
UTRA_carrier_RSSI_LEV_75	-26 ≤ UTRA carrier RSSI < -25	dBm
UTRA_carrier_RSSI_LEV_76	-25 ≤ UTRA carrier RSSI	dBm

9.1.1.5 GSM carrier RSSI

Note: This measurement is for handover between UTRAN and GSM.

The requirements in this section are valid for terminals supporting this capability.

The measurement period for CELL_DCH state can be found in section 8.

If the UE does not need compressed mode to perform GSM measurements, the measurement accuracy requirements for RXLEV in GSM 05.08 shall apply.

The reporting range and mapping specified for RXLEV in GSM 05.08 shall apply.

9.1.1.6 SIR

The measurement period for CELL_DCH state can be found in section 8.

9.1.1.6.1 Absolute accuracy requirements

Table 9.14 SIR Intra frequency absolute accuracy

Parameter	Unit	Accuracy [dB]		Conditions
		Normal conditions	Extreme conditions	
SIR	dB	±3 dB for	[]	For $0 < SIR < 20$ dB and lo range -94...-50
SIR	dB	±(3 - SIR)	[]	For $-7 \leq SIR \leq 0$ dB and lo range -94...-50

9.1.1.6.2 Range/mapping

The reporting range for *SIR* is from -11 ...20 dB.

In table 9.15 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.15

Reported value	Measured quantity value	Unit
UE_SIR_00	$SIR < -11,0$	dB
UE_SIR_01	$-11,0 \leq SIR < -10,5$	dB
UE_SIR_02	$-10,5 \leq SIR < -10,0$	dB
...
UE_SIR_61	$-19 \leq SIR < 19,5$	dB
UE_SIR_62	$19,5 \leq SIR < 20$	dB
UE_SIR_63	$20 \leq SIR$	dB

9.1.1.7 Transport channel BLER

9.1.1.7.1 BLER measurement requirement

The Transport Channel BLER value shall be calculated from a window with the size equal to the reporting interval (see clause on periodical reporting criteria in TS 25.331).

9.1.1.7.2 Range/mapping

The *Transport channel BLER* reporting range is from 0 to 1.

In table 9.16 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.16

Reported value	Measured quantity value	Unit
BLER_LOG_00	Transport channel BLER = 0	-
BLER_LOG_01	$-\infty < \text{Log}_{10}(\text{Transport channel BLER}) < -4,03$	-
BLER_LOG_02	$-4,03 \leq \text{Log}_{10}(\text{Transport channel BLER}) < -3,965$	-
BLER_LOG_03	$-3,965 \leq \text{Log}_{10}(\text{Transport channel BLER}) < -3,9$	-
...
BLER_LOG_61	$-0,195 \leq \text{Log}_{10}(\text{Transport channel BLER}) < -0,13$	-
BLER_LOG_62	$-0,13 \leq \text{Log}_{10}(\text{Transport channel BLER}) < -0,065$	-
BLER_LOG_63	$-0,065 \leq \text{Log}_{10}(\text{Transport channel BLER}) \leq 0$	-

9.1.1.8 SFN-SFN observed time difference

The measurement period for CELL_DCH state can be found in section 8.

9.1.1.8.1 Accuracy requirements

9.1.1.8.1.1 3.84 Mcps TDD option

The accuracy requirement in table 9.17 is valid under the following conditions:

- $P\text{-CCPCH_RSCP}_{1,2} \geq -102 \text{ dBm}$.
- $\left| P\text{-CCPCH_RSCP}_{1|_{in\ dB}} - P\text{-CCPCH_RSCP}_{2|_{in\ dB}} \right| \leq 20 \text{ dB}$
- The received signal levels on SCH and P-CCPCH are according the requirements in paragraph 8.1.2.6.

Table 9.17 SFN-SFN observed time difference accuracy

Parameter	Unit	Accuracy [chip]	Conditions
			Io [dBm]
SFN-SFN observed time difference	chip	+/-0,5 for both type 1 and 2	-94...-50

9.1.1.8.1.2 1.28 Mcps TDD option

Table 9.17A: SFN-SFN observed time difference accuracy

Parameter	Unit	Accuracy	Conditions
			Io [dBm]
<i>SFN-SFN observed time difference</i>	Chip	+/-0,5 for type 1 but +/- 0.125 for type 2	-94...-50

9.1.1.8.2 Range/mapping

9.1.1.8.2.1 3.84 Mcps TDD option

The reporting range for *SFN-SFN observed time difference type 1* is from 0 ... 9830400 chip.

In table 9.18 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.18

Reported value	Measured quantity value	Unit
T1_SFN-SFN_TIME _0000000	$0 \leq \text{SFN-SFN observed time difference type 1} < 1$	chip
T1_SFN-SFN_TIME _0000001	$1 \leq \text{SFN-SFN observed time difference type 1} < 2$	chip
T1_SFN-SFN_TIME _0000002	$2 \leq \text{SFN-SFN observed time difference type 1} < 3$	chip
...
T1_SFN-SFN_TIME _9830397	$9830397 \leq \text{SFN-SFN observed time difference type 1} < 9830398$	chip
T1_SFN-SFN_TIME _9830398	$9830398 \leq \text{SFN-SFN observed time difference type 1} < 9830399$	chip
T1_SFN-SFN_TIME _9830399	$9830399 \leq \text{SFN-SFN observed time difference type 1} < 9830400$	chip

The reporting range for *SFN-SFN observed time difference type 2* is from -1280 ... +1280 chip.

In table 9.19 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.19

Reported value	Measured quantity value	Unit
T2_SFN-SFN_TIME _00000	SFN-SFN observed time difference type 2 < -1280,0000	chip
T2_SFN-SFN_TIME _00001	-1280,0000 ≤ SFN-SFN observed time difference type 2 < -1279,9375	chip
T2_SFN-SFN_TIME _00002	-1279,9375 ≤ SFN-SFN observed time difference type 2 < -1279,8750	chip
...
T2_SFN-SFN_TIME _40959	1279,8750 ≤ SFN-SFN observed time difference type 2 < 1279,9375	chip
T2_SFN-SFN_TIME _40960	1279,9375 ≤ SFN-SFN observed time difference type 2 < 1280,0000	chip
T2_SFN-SFN_TIME _40961	1280,0000 ≤ SFN-SFN observed time difference type 2	chip

9.1.1.8.2.2 1.28 Mcps TDD option

The reporting range for *SFN-SFN observed time difference type 1* is from 0 ... 3276800 chip.

In table 9.18A mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.18A

Reported value	Measured quantity value	Unit
T1_SFN-SFN_TIME _0000000	0 ≤ SFN-SFN observed time difference type 1 < 1	chip
T1_SFN-SFN_TIME _0000001	1 ≤ SFN-SFN observed time difference type 1 < 2	chip
T1_SFN-SFN_TIME _0000002	2 ≤ SFN-SFN observed time difference type 1 < 3	chip
...
T1_SFN-SFN_TIME _3276797	3276797 ≤ SFN-SFN observed time difference type 1 < 3276798	chip
T1_SFN-SFN_TIME _3276798	3276798 ≤ SFN-SFN observed time difference type 1 < 3276799	chip
T1_SFN-SFN_TIME _3276799	3276799 ≤ SFN-SFN observed time difference type 1 < 3276800	chip

The reporting range for *SFN-SFN observed time difference type 2* is from -6400 ... +6400 chip.

In table 9.19A mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.19A

Reported value	Measured quantity value	Unit
T2_SFN-SFN_TIME _00000	SFN-SFN observed time difference type 2 < -6390,00	chip
T2_SFN-SFN_TIME _00001	-6390,00 ≤ SFN-SFN observed time difference type 2 < -6399,75	chip
T2_SFN-SFN_TIME _00002	-6399,75 ≤ SFN-SFN observed time difference type 2 < -6399,50	chip

...
T2_SFN-SFN_TIME_51199	$6399,50 \leq \text{SFN-SFN observed time difference type 2} < 6399,75$	chip
T2_SFN-SFN_TIME_51200	$6399,75 \leq \text{SFN-SFN observed time difference type 2} < 6400,00$	chip
T2_SFN-SFN_TIME_51201	$6400,00 \leq \text{SFN-SFN observed time difference type 2}$	chip

There are 3 kind of special time slot (DwPTS, UpPTS and GP) in 1.28 Mcps TDD frame structure. When calculation the SFN-SFN observed time difference in type 2, it needs to consider the position and affection of these 3 special time slots.

Let us suppose:

T_{RxTSi} : time of start of timeslot#0 received of the serving TDD cell i.

T_{RxTSk} : time of start of timeslot#0 received from the target UTRA cell k that is closest in time to the start of the timeslot of the serving TDD cell i.

SFN-SFN observed time difference = $T_{\text{RxTSk}} - T_{\text{RxTSi}}$, in chips, which means to calculate the the time difference of the start position of the current frame in cell i to the closest starting position of one frame in cell k.

Editor Note: Here in type 2 we only consider to measure the difference of two cells of 1.28 Mcps TDD. The measurement method is like that in TS25.215. In type 2 measurement of TS25.215, it measures the time difference of the start position of the P-CPICH of two cells. That is just something like in 1.28 Mcps TDD.

9.1.1.9 Observed time difference to GSM cell

Note: This measurement is used to determine the system time difference between UTRAN and GSM cells.

The requirements in this section are valid for terminals supporting UTRA TDD and GSM.

The measurement period for CELL_DCH state is [10 s].

9.1.1.9.1 Accuracy requirements

Table 9.20 Observed time difference to GSM cell accuracy

Parameter	Unit	Accuracy [chip]	Conditions
Observed time difference to GSM cell	chip	± 20	

9.1.1.9.2 Range/mapping

The reporting range for *Observed time difference to GSM cell* is from 0 ... 3060/13 ms.

In table 9.21 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.21

Reported value	Measured quantity value	Unit
GSM_TIME_0000	$0 \leq \text{Observed time difference to GSM cell} < 1 \times 3060 / (4096 \times 13)$	ms
GSM_TIME_0001	$1 \times 3060 / (4096 \times 13) \leq \text{Observed time difference to GSM cell} < 2 \times 3060 / (4096 \times 13)$	ms
GSM_TIME_0002	$2 \times 3060 / (4096 \times 13) \leq \text{Observed time difference to GSM cell} < 3 \times 3060 / (4096 \times 13)$	ms
GSM_TIME_0003	$3 \times 3060 / (4096 \times 13) \leq \text{Observed time difference to GSM cell} < 4 \times 3060 / (4096 \times 13)$	ms
...
GSM_TIME_4093	$4093 \times 3060 / (4096 \times 13) \leq \text{Observed time difference to GSM cell} < 4094 \times 3060 / (4096 \times 13)$	ms
GSM_TIME_4094	$4094 \times 3060 / (4096 \times 13) \leq \text{Observed time difference to GSM cell} < 4095 \times 3060 / (4096 \times 13)$	ms
GSM_TIME_4095	$4095 \times 3060 / (4096 \times 13) \leq \text{Observed time difference to GSM cell} < 3060 / 13$	ms

9.1.1.10 UE GPS Timing of Cell Frames for UP

9.1.1.10.1 Accuracy requirement

The requirements in this section are valid for terminals supporting this capability

The measurement period for CELL_DCH state can be found in section 8.

Table 9.22

Parameter	Unit	Accuracy [chip]	Conditions
UE GPS Timing of Cell Frames for LCS	chip	[]	

9.1.1.10.2 UE GPS timing of Cell Frames for UP measurement report mapping

The reporting range for *UE GPS timing of Cell Frames for UP* is from 0 ... 2322432000000 chip.

In table 9.23 mapping of the measured quantity is defined.

Table 9.23

Reported value	Measured quantity value	Unit
GPS_TIME_0000000000000000	UE GPS timing of Cell Frames for UP < 0,0625	chip
GPS_TIME_0000000000000001	$0,0625 \leq \text{UE GPS timing of Cell Frames for UP} < 0,1250$	chip
GPS_TIME_0000000000000002	$0,1250 \leq \text{UE GPS timing of Cell Frames for UP} < 0,1875$	chip
...
GPS_TIME_37158911999997	$2322431999999,8125 \leq \text{UE GPS timing of Cell Frames for UP} < 2322431999999,8750$	chip
GPS_TIME_37158911999998	$2322431999999,8750 \leq \text{UE GPS timing of Cell Frames for UP} < 2322431999999,9375$	chip
GPS_TIME_37158911999999	$2322431999999,9375 \leq \text{UE GPS timing of Cell Frames for UP} < 2322432000000,0000$	chip

9.1.1.11 SFN-CFN observed time difference

Note: This measurement is for handover timing purposes to identify active cell and neighbour cell time difference.

The measurement period for CELL_DCH state can be found in section 8.

9.1.1.11.1 Accuracy requirements

The accuracy requirements in tables 9.24 are valid under the following conditions:

- $P\text{-CCPCH_RSCP}_{1,2} \geq -102\text{dBm}$.
- $\left| P\text{-CCPCH_RSCP}_1 \Big|_{in\ dB} - P\text{-CCPCH_RSCP}_2 \Big|_{in\ dB} \right| \leq 20\text{dB}$
- The received signal levels on SCH and P-CCPCH are according the requirements in paragraph 8.1.2.6

Table 9.24 SFN-CFN observed time difference accuracy for a TDD neighbour cell

Parameter	Unit	Accuracy [chip]	Conditions
			Io [dBm]
SFN-CFN observed time difference	chip	+/-0,5	-94...-50

The accuracy requirements in tables 9.25 are valid under the following conditions:

- $CPICH_RSCP_{1,2} \geq -114\ \text{dBm}$.
- $\left| CPICH_RSCP_1 \Big|_{in\ dB} - CPICH_RSCP_2 \Big|_{in\ dB} \right| \leq 20\text{dB}$

The received signal levels on SCH and CPICH are according the requirements in paragraph 8.1.2.6

Table 9.25 SFN-CFN observed time difference accuracy for a FDD neighbour cell

Parameter	Unit	Accuracy [chip]	Conditions
			Io [dBm]
SFN-CFN observed time difference	chip	+/-1	-94...-50

9.1.1.11.2 Range/mapping

The reporting range for SFN-CFN observed time difference for a TDD neighbour cell is from 0...256 frames.

In table 9.26 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.26 SFN-CFN observed time difference range/mapping for a TDD neighbour cell

Reported value	Measured quantity value	Unit
SFN-CFN_TIME_000	$0 \leq \text{SFN-CFN observed time difference} < 1$	frame
SFN-CFN_TIME_001	$1 \leq \text{SFN-CFN observed time difference} < 2$	frame
SFN-CFN_TIME_002	$2 \leq \text{SFN-CFN observed time difference} < 3$	frame
...
SFN-CFN_TIME_253	$253 \leq \text{SFN-CFN observed time difference} < 254$	frame
SFN-CFN_TIME_254	$254 \leq \text{SFN-CFN observed time difference} < 255$	frame
SFN-CFN_TIME_255	$255 \leq \text{SFN-CFN observed time difference} < 256$	frame

The reporting range for *SFN-CFN observed time difference* for a FDD neighbour cell is from 0 ... 9830400 chip.

In table 9.27 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.27 SFN-CFN observed time difference range/mapping for a FDD neighbour cell

Reported value	Measured quantity value	Unit
SFN-CFN_TIME _0000000	$0 \leq \text{SFN-CFN observed time difference} < 1$	chip
SFN-CFN_TIME _0000001	$1 \leq \text{SFN-CFN observed time difference} < 2$	chip
SFN-CFN_TIME _0000002	$2 \leq \text{SFN-CFN observed time difference} < 3$	chip
...
SFN-CFN_TIME _9830397	$9830397 \leq \text{SFN-CFN observed time difference} < 9830398$	chip
SFN-CFN_TIME _9830398	$9830398 \leq \text{SFN-CFN observed time difference} < 9830399$	chip
SFN-CFN_TIME _9830399	$9830399 \leq \text{SFN-CFN observed time difference} < 9830400$	chip

9.1.2 Performance for UE Measurements in Uplink (TX)

The output power is defined as the average power of the transmit timeslot, and is measured with a filter that has a Root-Raised Cosine (RRC) filter response with a roll off $\alpha = 0,22$ and a bandwidth equal to the chip rate.

9.1.2.1 UE transmitted power

The measurement period for CELL_DCH state is [1 slot].

9.1.2.1.1 Absolute accuracy requirements

Table 9.28 UE transmitted power absolute accuracy

Parameter	Unit	PUEMAX	
		24dBm	21dBm
UE transmitted power=PUEMAX	dB	+1/-3	± 2
UE transmitted power=PUEMAX-1	dB	+1,5/-3,5	$\pm 2,5$
UE transmitted power=PUEMAX-2	dB	+2/-4	± 3
UE transmitted power=PUEMAX-3	dB	+2,5/-4,5	$\pm 3,5$
$\text{PUEMAX}-10 \leq \text{UE transmitted power} < \text{PUEMAX}-3$	dB	+3/-5	± 4

Note 1: User equipment maximum output power, PUEMAX, is the maximum output power level without tolerance defined for the power class of the UE in 3GPP TS 25.102 "UTRA (UE) TDD; Radio Transmission and Reception".

Note 2: UE transmitted power is the reported value.

9.1.2.1.2 Range/mapping

The reporting range for *UE transmitted power* is from -50 ...+34 dBm.

In table 9.29 mapping of the measured quantity is defined. The range in the signalling may be larger than the guaranteed accuracy range.

Table 9.29

Reported value	Measured quantity value	Unit
UE_TX_POWER_021	$-50 \leq \text{UE transmitted power} < -49$	dBm
UE_TX_POWER_022	$-49 \leq \text{UE transmitted power} < -48$	dBm
UE_TX_POWER_023	$-48 \leq \text{UE transmitted power} < -47$	dBm
...
UE_TX_POWER_102	$31 \leq \text{UE transmitted power} < 32$	dBm
UE_TX_POWER_103	$32 \leq \text{UE transmitted power} < 33$	dBm
UE_TX_POWER_104	$33 \leq \text{UE transmitted power} < 34$	dBm

9.2 Measurements Performance for UTRAN

9.2.1 Performance for UTRAN Measurements in Uplink (RX)

9.2.1.1 RSCP

The measurement period shall be [100] ms.

9.2.1.1.1 Absolute accuracy requirements

Table 9.30 RSCP absolute accuracy

Parameter	Unit	Accuracy [dB]		Conditions
		Normal conditions	Extreme conditions	Io [dBm]
RSCP	dB	± 6	± 9	-105..-74

9.2.1.1.2 Relative accuracy requirements

The relative accuracy of RSCP in inter frequency case is defined as the RSCP measured from one UE compared to the RSCP measured from another UE.

Table 9.31 RSCP relative accuracy

Parameter	Unit	Accuracy [dB]	Conditions
			Io [dBm]
RSCP	dB	± 3 for intra-frequency	-105..-74

9.2.1.1.3 Range/mapping

The reporting range for RSCP is from -120 ...-57 dBm.

In table 9.32 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.32

Reported value	Measured quantity value	Unit
RSCP_LEV_00	RSCP < -120,0	dBm
RSCP_LEV_01	-120,0 ≤ RSCP < -119,5	dBm
RSCP_LEV_02	-119,5 ≤ RSCP < -119,0	dBm
...
RSCP_LEV_125	-58,0 ≤ RSCP < -57,5	dBm
RSCP_LEV_126	-57,5 ≤ RSCP < -57,0	dBm
RSCP_LEV_127	-57,0 ≤ RSCP	dBm

9.2.1.2 Timeslot ISCP

The measurement period shall be [100] ms.

9.2.1.2.1 Absolute accuracy requirements

Table 9.33 Timeslot ISCP Intra frequency absolute accuracy

Parameter	Unit	Accuracy [dB]		Conditions
		Normal conditions	Extreme conditions	Io [dBm]
Timeslot ISCP	dB	± 6	± 9	-105..-74

9.2.1.2.2 Range/mapping

The reporting range for *Timeslot ISCP* is from -120...-57 dBm.

In table 9.34 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.34

Reported value	Measured quantity value	Unit
UTRAN_TS_ISCP_LEV_00	Timeslot_ISCP < -120,0	dBm
UTRAN_TS_ISCP_LEV_01	-120,0 ≤ Timeslot_ISCP < -119,5	dBm
UTRAN_TS_ISCP_LEV_02	-119,5 ≤ Timeslot_ISCP < -119,0	dBm
...
UTRAN_TS_ISCP_LEV_125	-58,0 ≤ Timeslot_ISCP < -57,5	dBm
UTRAN_TS_ISCP_LEV_126	-57,5 ≤ Timeslot_ISCP < -57,0	dBm
UTRAN_TS_ISCP_LEV_127	-57,0 ≤ Timeslot_ISCP	dBm

9.2.1.3 RECEIVED TOTAL WIDE BAND POWER

The measurement period shall be [100] ms.

9.2.1.3.1 Absolute accuracy requirements

Table 9.35 RECEIVED TOTAL WIDE BAND POWER Intra frequency absolute accuracy

Parameter	Unit	Accuracy [dB]	Conditions
			Io [dBm]
RECEIVED TOTAL WIDE BAND POWER	dB	± 4	-105..-74

9.2.1.3.2 Range/mapping

The reporting range for *RECEIVED TOTAL WIDE BAND POWER* is from -112 ... -50 dBm.

In table 9.36 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.36

Reported value	Measured quantity value	Unit
RECEIVED TOTAL WIDE BAND POWER_LEV_000	RECEIVED TOTAL WIDE BAND POWER < -112,0	dBm
RECEIVED TOTAL WIDE BAND POWER_LEV_001	-112,0 ≤ RECEIVED TOTAL WIDE BAND POWER < -111,9	dBm
RECEIVED TOTAL WIDE BAND POWER_LEV_002	-111,9 ≤ RECEIVED TOTAL WIDE BAND POWER < -111,8	dBm
...
RECEIVED TOTAL WIDE BAND POWER_LEV_619	-50,2 ≤ RECEIVED TOTAL WIDE BAND POWER < -50,1	dBm
RECEIVED TOTAL WIDE BAND POWER_LEV_620	-50,1 ≤ RECEIVED TOTAL WIDE BAND POWER < -50,0	dBm
RECEIVED TOTAL WIDE BAND POWER_LEV_621	-50,0 ≤ RECEIVED TOTAL WIDE BAND POWER	dBm

9.2.1.4 SIR

The measurement period shall be [80] ms.

9.2.1.4.1 Absolute accuracy requirements

Table 9.37 SIR Intra frequency absolute accuracy

Parameter	Unit	Accuracy [dB]	Conditions
			Range
SIR	dB	± 3	For 0 < SIR < 20 dB when lo > -105 dBm
SIR	dB	+/- (3 - SIR)	For -7 < SIR < 0 dB when lo > -105 dBm

9.2.1.4.2 Range/mapping

The reporting range for *SIR* is from -11 ... 20 dB.

In table 9.38 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.38

Reported value	Measured quantity value	Unit
UTRAN_SIR_00	SIR < -11,0	dB
UTRAN_SIR_01	-11,0 ≤ SIR < -10,5	dB
UTRAN_SIR_02	-10,5 ≤ SIR < -10,0	dB
...
UTRAN_SIR_61	19,0 ≤ SIR < 19,5	dB
UTRAN_SIR_62	19,5 ≤ SIR < 20,0	dB
UTRAN_SIR_63	20,0 ≤ SIR	dB

9.2.1.5 Transport Channel BER

The measurement period shall be equal to the [TTI] of the transport channel. Each reported Transport channel BER measurement shall be an estimate of the BER averaged over one measurement period only.

9.2.1.5.1 Accuracy requirement

The average of consecutive Transport channel BER measurements is required to fulfil the accuracy stated in table 9-48 if the total number of erroneous bits during these measurements is at least 500 and the absolute BER value for each of the measurements is within the range given in table 9.39.

Table 9.39 Transport channel BER accuracy

Parameter	Unit	Accuracy [% of the absolute BER value]	Conditions
			Range
TrpBER	-	+/- 10	Convolutional coding 1/3 rd with any amount of repetition or a maximum of 25% puncturing: for absolute BER value $\leq 15\%$ Convolutional coding 1/2 with any amount of repetition or no puncturing: for absolute BER value $\leq 15\%$ Turbo coding 1/3 rd with any amount of repetition or a maximum of 20% puncturing: for absolute BER value $\leq 15\%$.

9.2.1.5.2 Range/mapping

The *Transport channel BER* reporting range is from 0 to 1.

In table 9.40 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.40

Reported value	Measured quantity value	Unit
TrCh_BER_LOG_000	Transport channel BER = 0	-
TrCh_BER_LOG_001	$-\infty < \text{Log}_{10}(\text{Transport channel BER}) < -2,06375$	-
TrCh_BER_LOG_002	$-2,06375 \leq \text{Log}_{10}(\text{Transport channel BER}) < -2,055625$	-
TrCh_BER_LOG_003	$-2,055625 \leq \text{Log}_{10}(\text{Transport channel BER}) < -2,0475$	-
...
TrCh_BER_LOG_253	$-0,024375 \leq \text{Log}_{10}(\text{Transport channel BER}) < -0,01625$	-
TrCh_BER_LOG_254	$-0,01625 \leq \text{Log}_{10}(\text{Transport channel BER}) < -0,008125$	-
TrCh_BER_LOG_255	$-0,008125 \leq \text{Log}_{10}(\text{Transport channel BER}) \leq 0$	-

9.2.1.6 RX Timing Deviation

The measurement period shall be [100] ms.

9.2.1.6.1 Accuracy requirements

9.2.1.6.1.1 3.84 Mcps TDD option

Table 9.41 RX Timing Deviation accuracy

Parameter	Unit	Accuracy [chip]	Conditions
			Range [chips]
RX Timing Deviation	chip	+/- 0,5	-256, ..., 256

9.2.1.6.1.2 1.28 Mcps TDD option

Table 9.41A

Parameter	Unit	Accuracy	Conditions
-----------	------	----------	------------

			Range [chips]
<i>RX Timing Deviation</i>	Chips period	+/- 0.125	-128, ..., 128

9.2.1.6.2 Range/mapping

9.2.1.6.2.1 3.84 Mcps TDD option

The reporting range for *RX Timing Deviation* is from -255,9375 ... 255,9375 chips.

In table 9.42 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.42

Reported value	Measured quantity value	Unit
RX_TIME_DEV_0000	RX Timing Deviation < -255,9375	chip
RX_TIME_DEV_0001	-255,9375 ≤ RX Timing Deviation < 255,875	chip
RX_TIME_DEV_0002	-255,875 ≤ RX Timing Deviation < -255,8125	chip
...
RX_TIME_DEV_4096	000,00 ≤ RX Timing Deviation < 0,0625	chip
...
RX_TIME_DEV_8189	255,8125 ≤ RX Timing Deviation < 255,875	chip
RX_TIME_DEV_8190	255,875 ≤ RX Timing Deviation < 255,9375	chip
RX_TIME_DEV_8191	255,9375 ≤ RX Timing Deviation	chip

NOTE: This measurement may be used for timing advance calculation or location services.

9.2.1.6.2.2 1.28 Mcps TDD option

The reporting range for *RX Timing Deviation* is from -128 ... 128 chips.

In table 9.42A mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.42A

Reported value	Measured quantity value	Unit
RX_TIME_DEV_0001	RX Timing Deviation < -128,000	chip
RX_TIME_DEV_0002	-128,000 ≤ RX Timing Deviation < -127,875	chip
RX_TIME_DEV_0003	-127,875 ≤ RX Timing Deviation < -127,750	chip
...
RX_TIME_DEV_1024	000,000 ≤ RX Timing Deviation < 000,125	chip
...
RX_TIME_DEV_2046	127,750 ≤ RX Timing Deviation < 127,875	chip
RX_TIME_DEV_2047	127,875 ≤ RX Timing Deviation < 128,000	chip
RX_TIME_DEV_2048	128,000 ≤ RX Timing Deviation	chip

NOTE: This measurement can be used for timing advance (synchronisation shift) calculation for uplink synchronisation or location services.

9.2.1.7 (void)

9.2.1.8 (void)

9.2.1.9 UTRAN GPS Timing of Cell Frames for UP

NOTE: This measurement is used for UP purposes.

The measurement period shall be [1] second.

9.2.1.9.1 Accuracy requirement

Three accuracy classes are defined for the UTRAN GPS Timing of Cell Frames for UP measurement, i.e. accuracy class A, B and C. The implemented accuracy class depends on the UP methods that are supported.

Table 9.43

Parameter	Unit	Accuracy [chip]	Conditions
UTRAN GPS timing of Cell Frames for UP	chip	Accuracy Class A: +/- [20000] chip Accuracy Class B: +/- [20] chip Accuracy Class C: +/- [X] chip	Over the full range

9.2.1.9.2 Range/mapping

The reporting range for *UTRAN GPS timing of Cell Frames for UP* is from 0 ... 2322432000000 chip.

In table 9.44 the mapping of measured quantity is defined.

Table 9.44

Reported value	Measured quantity value	Unit
GPS_TIME_00000000000000	UTRAN GPS timing of Cell Frames for UP < 0,0625	chip
GPS_TIME_00000000000001	0,0625 ≤ UTRAN GPS timing of Cell Frames for UP < 0,1250	chip
GPS_TIME_00000000000002	0,1250 ≤ UTRAN GPS timing of Cell Frames for UP < 0,1875	chip
...
GPS_TIME_37109759999997	2322431999999,8125 ≤ UTRAN GPS timing of Cell Frames for UP < 2322431999999,8750	chip
GPS_TIME_37109759999998	2322431999999,8750 ≤ UTRAN GPS timing of Cell Frames for UP < 2322431999999,9375	chip
GPS_TIME_37109759999999	2322431999999,9375 ≤ UTRAN GPS timing of Cell Frames for UP < 2322432000000,0000	chip

9.2.1.10 SYNC-UL Timing Deviation for 1.28 Mcps

This measurement refers to TS25.225 subsection 5.2.8.1.

9.2.1.10.1 Accuracy requirements

Table 9.44A

Parameter	Unit	Accuracy	Conditions
			Range [chips]

<i>SYNC-UL Timing Deviation</i>	chips period	+/- 0.125	0, ..., 255.875
---------------------------------	--------------	-----------	-----------------

9.2.1.10.2 Range/mapping

The reporting range for *SYNC-UL Timing Deviation* is from 0 ... 255.875 chips.

In table 9.44B the mapping of the measured quantity is defined. Signaling range may be larger than the guaranteed accuracy range.

Table 9.44B

Reported value	Measured quantity value	Unit
SYNC_UL_TIME_DEV_0000	SYNC-UL Timing Deviation < 0	chip
SYNC_UL_TIME_DEV_0001	0 ≤ SYNC-UL Timing Deviation < 0.125	chip
SYNC_UL_TIME_DEV_0002	0.125 ≤ SYNC-UL Timing Deviation < 0.25	chip
...
SYNC_UL_TIME_DEV_1024	127.875 ≤ SYNC-UL Timing Deviation < 128	chip
...
SYNC_UL_TIME_DEV_2045	255.625 ≤ SYNC-UL Timing Deviation < 255.75	chip
SYNC_UL_TIME_DEV_2046	255.75 ≤ SYNC-UL Timing Deviation < 255.875	chip
SYNC_UL_TIME_DEV_2047	255.875 ≤ SYNC-UL Timing Deviation	chip

NOTE: This measurement can be used for timing advance (synchronisation shift) calculation for uplink synchronisation or location services.

9.2.1.11 Node B Synchronisation

Cell synchronisation burst timing is the time of start (defined by the first detected path in time) of the cell sync burst of a neighbouring cell. Type 1 is used for the initial phase of Node B synchronization. Type 2 is used for the steady-state phase of Node B synchronization. Both have different range.

The reference point for the cell sync burst timing measurement shall be the Rx antenna connector.

9.2.1.11.1 Cell Synchronisation burst timing Type1 and Type 2

Table 9.44C

Parameter	Unit	Accuracy [chip]	Conditions
<i>Cell Synchronisation burst timing</i>	chip	[+/-0,5 for both type 1 and type 2]	

9.2.1.11.2 Range/mapping Type 1

The reporting range for Cell Synchronisation burst timing type 1 is from -131072 to +131072 chips with 1/4 chip resolution.

In table 9.44D the mapping of measured quantity is defined for burst type 1.

Table 9.44D

Reported value	Measured quantity value	Unit
Burst_TIME__TYPE1_0000000	$-131072 \leq \text{burst timing Type 2} < -131071.75$	chip
Burst_TIME__TYPE1_0000001	$-131071.75 \leq \text{burst timing Type 2} < -131071.5$	chip
Burst_TIME__TYPE1_0000002	$-131071.5 \leq \text{burst timing Type 2} < -131071.25$	chip
...
Burst_TIME__TYPE1_1048473	$-131071.25 \leq \text{burst timing Type 2} < 131071.5$	chip
Burst_TIME__TYPE1_1048574	$-131071.5 \leq \text{burst timing Type 2} < 131071.75$	chip
Burst_TIME__TYPE1_1048575	$-131071.75 \leq \text{burst timing Type 2} < 131072$	chip

9.2.1.11.3 Range/mapping Type 2

The reporting range for Cell Synchronisation burst timing type 2 is from -16 to $+16$ chips with $1/8$ chip resolution. In table 9.44E the mapping of measured quantity is defined for burst type 2.

Table 9.44E

Reported value	Measured quantity value	Unit
Burst_TIME__TYPE2_0000	$-16 \leq \text{burst timing Type 2} < -15.875$	chip
Burst_TIME__TYPE2_0001	$-15.875 \leq \text{burst timing Type 2} < -15.750$	chip
Burst_TIME__TYPE2_0002	$-15.750 \leq \text{burst timing Type 2} < -15.625$	chip
...
Burst_TIME__TYPE2_0253	$15.625 \leq \text{burst timing Type 2} < 15.750$	chip
Burst_TIME__TYPE2_0254	$15.750 \leq \text{burst timing Type 2} < 15.875$	chip
Burst_TIME__TYPE2_0255	$15.875 \leq \text{burst timing Type 2} < 16$	chip

9.2.1.11.4 Cell Synchronisation burst SIR Type1 and Type2

Signal to Interference Ratio for the cell sync burst, defined according to TS25.225.

The reference point for the cell synchronisation burst SIR shall be the Rx antenna connector.

Table 9.44F

Parameter	Unit	Accuracy [dB]		Conditions
		Normal conditions	Extreme conditions	
Cell Synchronisation burst SIR	dB	± 3 dB for both type 1 and 2	[]	

9.2.1.11.5 Range/Mapping for Type1 and Type 2

The reporting range for SIR is from 0 ... 60 dB with a resolution of 2dB.

In table 9.44G mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.44H

Reported value	Measured quantity value	Unit
UE_SIR_00	$SIR < 0$	dB
UE_SIR_01	$0 \leq SIR < 2$	dB
UE_SIR_02	$2 \leq SIR < 4$	dB
...
UE_SIR_29	$56 \leq SIR < 58$	dB
UE_SIR_30	$58 \leq SIR < 60$	dB
UE_SIR_31	$60 \leq SIR$	dB

9.2.2 Performance for UTRAN measurements in downlink (TX)

The output power is defined as the average power of the transmit timeslot, and is measured with a filter that has a Root-Raised Cosine (RRC) filter response with a roll off $\alpha = 0,22$ and a bandwidth equal to the chip rate.

9.2.2.1 Transmitted carrier power

The measurement period shall be [100] ms.

9.2.2.1.1 Accuracy requirements

Table 9.45 Transmitted carrier power accuracy

Parameter	Unit	Accuracy [% units]	Conditions
			Range
Transmitted carrier power	%	± 10	For $10\% \leq$ Transmitted carrier power $\leq 90\%$

9.2.2.1.2 Range/mapping

The reporting range for *Transmitted carrier power* is from 0 ... 100 %.

In table 9.46 mapping of the measured quantity is defined. Signalling range may be larger than the guaranteed accuracy range.

Table 9.46

Reported value	Measured quantity value	Unit
UTRAN_TX_POWER_000	Transmitted carrier power = 0	%
UTRAN_TX_POWER_001	$0 < \text{Transmitted carrier power} \leq 1$	%
UTRAN_TX_POWER_002	$1 < \text{Transmitted carrier power} \leq 2$	%
UTRAN_TX_POWER_003	$2 < \text{Transmitted carrier power} \leq 3$	%
...
UTRAN_TX_POWER_098	$97 < \text{Transmitted carrier power} \leq 98$	%
UTRAN_TX_POWER_099	$98 < \text{Transmitted carrier power} \leq 99$	%
UTRAN_TX_POWER_100	$99 < \text{Transmitted carrier power} \leq 100$	%

9.2.2.2 Transmitted code power

The measurement period shall be [100] ms.

9.2.2.2.1 Absolute accuracy requirements

Table 9.47 Transmitted code power absolute accuracy

Parameter	Unit	Accuracy [dB]	Conditions
			Range
Transmitted code power	dB	[± 3]	Over the full range

9.2.2.2.2 Relative accuracy requirements

The relative accuracy of transmitted code power is defined as the transmitted code power measured at one dedicated radio link compared to the transmitted code power measured from a different dedicated radio link in the same cell.

Table 9.48 Transmitted code power relative accuracy

Parameter	Unit	Accuracy [dB]	Conditions
			Range
Transmitted code power	dB	± 2	Over the full range

9.2.2.2.3 Range/mapping

The reporting range for *Transmitted code power* is from -10 ... 46 dBm.

In table 9.49 the mapping of measured quantity is defined. The range in the signalling may be larger than the guaranteed accuracy range.

Table 9.49

Reported value	Measured quantity value	Unit
UTRAN_CODE_POWER_010	$-10,0 \leq \text{Transmitted code power} < -9,5$	dBm
UTRAN_CODE_POWER_011	$-9,5 \leq \text{Transmitted code power} < -9,0$	dBm
UTRAN_CODE_POWER_012	$-9,0 \leq \text{Transmitted code power} < -8,5$	dBm
...
UTRAN_CODE_POWER_120	$45,0 \leq \text{Transmitted code power} < 45,5$	dBm
UTRAN_CODE_POWER_121	$45,5 \leq \text{Transmitted code power} < 46,0$	dBm
UTRAN_CODE_POWER_122	$46,0 \leq \text{Transmitted code power} < 46,5$	dBm

10 FPACH physical layer information field definition (1.28 Mcps TDD)

1.28 Mcps TDD introduces the FPACH (Forward Physical Access CHannel) which carries physical layer information. Two of these information fields are the 'received starting position of the UpPCH' (Uplink Pilot CHannel) and the 'transmit power level command for the RACH message'. Both information fields are directly (received starting position of the UpPCH) or can be indirectly (transmit power level command for the RACH message) derived from measurements but are no measurements themselves.

10.1 Received starting position of the UpPCH (UpPCH_{POS}) (1.28 Mcps TDD)

10.1.1 Range/mapping

Table 10.1

Range/mapping	UpPCH _{POS} FIELD is given with a resolution of 1/8 chip with the range [0,255.875] chip.		
	UpPCH _{POS} FIELD shall be transmitted in the FPACH where:		
	UpPCH _{POS} FIELD_LEV_0000:		UpPCH _{POS} < 0 chip
	UpPCH _{POS} FIELD_LEV_0001:	0 chip	≤ UpPCH _{POS} < 0.125 chip
	UpPCH _{POS} FIELD_LEV_0002:	0.125 chip	≤ UpPCH _{POS} < 0.25 chip
	...		
	UpPCH _{POS} FIELD_LEV_2045:	255.625 chip	≤ UpPCH _{POS} < 255.75 chip
UpPCH _{POS} FIELD_LEV_2046:	255.75 chip	≤ UpPCH _{POS} < 255.875 chip	
UpPCH _{POS} FIELD_LEV_2047:	255.875 chip	≤ UpPCH _{POS}	

10.1.2 Accuracy requirements

Table 10.2

Parameter	Unit	Accuracy	Conditions
			Range [chips]
Received starting position of the UpPCH	chips period	+/- 0.125	0, ..., 255.875

10.2 Transmit Power Level Command for the RACH message (1.28 Mcps TDD)

10.2.1 Range/mapping

Table 10.3

Range/mapping	PRX _{PRACH,des} FIELD is given with a resolution of 0.5 dB with the range [-120,-80] dBm.		
	PRX _{PRACH,des} FIELD shall be transmitted in the FPACH where:		
	PRX _{PRACH,des} FIELD_LEV_00:		PRX _{PRACH,des} < -120 dBm
	PRX _{PRACH,des} FIELD_LEV_01:	-120 dBm	≤ PRX _{PRACH,des} < -119.5 dBm
	PRX _{PRACH,des} FIELD_LEV_02:	-119.5 dBm	≤ PRX _{PRACH,des} < -119 dBm
	...		
	PRX _{PRACH,des} FIELD_LEV_78:	-81 dBm	≤ PRX _{PRACH,des} < -80.5 dBm
PRX _{PRACH,des} FIELD_LEV_79:	-80.5 dBm	≤ PRX _{PRACH,des} < -80 dBm	
PRX _{PRACH,des} FIELD_LEV_80:	-80 dBm	≤ PRX _{PRACH,des}	

10.2.2 Accuracy requirements:

Since this is a desired RX power at the node B and this is no measured value and the derivation of this value in the node B is implementation specific, accuracy requirements are not applicable.

Annex A (normative): Test Cases

A.1 Purpose of Annex

This Annex specifies test specific parameters for some of the functional requirements in chapters 4 to 9. The tests provide additional information to how the requirements should be interpreted for the purpose of conformance testing. The tests in this Annex are described such that one functional requirement may be tested in one or several test and one test may verify several requirements. Some requirements may lack a test.

The conformance tests are specified in TS34.122. Statistical interpretation of the requirements is described in Annex A.2.

A.2 Requirement classification for statistical testing

Requirements in this specification are either expressed as absolute requirements with a single value stating the requirement, or expressed as a success rate. There are no provisions for the statistical variations that will occur when the parameter is tested.

Annex A outlines the test in more detail and lists the test parameters needed. The test will result in an outcome of a test variable value for the DUT inside or outside the test limit. Overall, the probability of a “good” DUT being inside the test limit(s) and the probability of a “bad” DUT being outside the test limit(s) should be as high as possible. For this reason, when selecting the test variable and the test limit(s), the statistical nature of the test is accounted for.

The statistical nature depends on the type of requirement. Some have large statistical variations, while others are not statistical in nature at all. When testing a parameter with a statistical nature, a confidence level is set. This establishes the probability that a DUT passing the test actually meets the requirement and determines how many times a test has to be repeated and what the pass and fail criteria are. Those aspects are not covered by TS 25.123. The details of the tests, how many times to run it and how to establish confidence in the tests are described in TS 34.122. This Annex establishes what the test variable is and whether it can be viewed as statistical in nature or not.

A.2.1 Types of requirements in TS 25.123

A.2.1.1 Time and delay requirements on UE higher layer actions

One part of the RRM requirements are delay requirements:

In idle mode (A.4) there is cell selection delay and cell re-selection delay.

In UTRAN Connected Mode Mobility (A.5) there is measurement reporting delay and cell re-selection delay.

All have in common that the UE is required to perform an action observable in higher layers (e.g. camp on the correct cell) within a certain time after a specific event (e.g. a new strong pilot arises). The delay time is statistical in nature for several reasons, among others that measurements required by the UE are performed in a fading radio environment.

The variations make a strict limit unsuitable for a test. Instead there is a condition set for a correct action by the UE, e.g. that the UE shall camp on the correct cell within X seconds. Then the rate of correct events is observed during repeated tests and a limit is set on the rate of correct events, usually 90% correct events are required. How the limit is applied in the test depends on the confidence required, further detailed are in TS 34.122.

A.2.1.2 Measurements of power levels, relative powers and time

A very large number of requirements are on measurements that the UE performs:

In UTRAN Connected Mode Mobility (A.5) there are measurement reports.

Measurement performance requirements (A.8) has requirements on all type of measurements.

The accuracy requirements on measurements are expressed in this specification as a fixed limit (e.g. +/-X dB), but the measurement error will have a distribution that is not easily confined in fixed limits. Assuming a Gaussian distribution of the error, the limits will have to be set at $\pm 3,29\sigma$ if the probability of failing a “good DUT” in a single test is to be kept at 0,1%. It is more reasonable to set the limit tighter and test the DUT by counting the rate of measurements that are within the limits, in a way similar to the requirements on delay.

A.2.1.3 Implementation requirements

A few requirements are strict actions the UE should take or capabilities the UE should have, without any allowance for deviations. These requirements are absolute and should be tested as such. Examples are

“Event triggered report rate” in UTRAN Connected Mode Mobility (A.5)

A.2.1.4 Physical layer timing requirements

All requirements on “Timing Characteristics” (A.7) are absolute limits on timing accuracy.

A.2.1.5 BER and BLER requirements

Some measurement report procedures in “UE Measurement procedures” (A.8) have requirements on DCH BLER. These are tested in the same way as BLER requirements in TS 25.102.

A.3 Reserved for Future Use

Editors Note: This section is included in order to make the following section numbering, match the sections in the beginning of this specification.

A.4 Idle Mode

A.4.1 Cell selection

NOTE: This section is included for consistency with numbering with section 4; no test covering requirements exist.

A.4.2 Cell Re-Selection

For each of the re-selection scenarios in section 4.2 a test is proposed.

For TDD/TDD cell reselection two scenarios are considered:

Scenario 1: Single carrier case

Scenario 2: Multi carrier case

A.4.2.1 Scenario 1: TDD/TDD cell re-selection single carrier case

A.4.2.1.1 Test Purpose and Environment

A.4.2.1.1.1 3.84 Mcps TDD option

This test is to verify the requirement for the cell re-selection delay in the single carrier case reported in section 4.2.2.

This scenario implies the presence of 1 carrier and 6 cells as given in Table A.4.1 and A.4.2. Cell 1 and cell 2 shall belong to different Location Areas.

Table A.4.1: General test parameters for Cell Re-selection single carrier multi-cell case

	Parameter	Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
Final condition	Active cell		Cell2	
	Access Service Class (ASC#0) - Persistence value		1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
	DRX cycle length	s	1.28	The value shall be used for all cells in the test.
	T1	s	15	
	T2	s	15	

Table A.4.2: Cell re-selection single carrier multi-cell case

Parameter	Unit	Cell 1				Cell 2				Cell 3			
<i>Timeslot Number</i>		0		8		0		8		0		8	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
<i>UTRA RF Channel Number</i>		Channel 1				Channel 1				Channel 1			
<i>PCCPCH_Ec/Ior</i>	dB	-3	-3			-3	-3			-3	-3		
<i>SCH_Ec/Ior</i>	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
<i>SCH_t_offset</i>		0	0	0	0	5	5	5	5	10	10	10	10
<i>PICH_Ec/Ior</i>	dB			-3	-3			-3	-3			-3	-3
<i>OCNS_Ec/Ior</i>	dB	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28
\hat{I}_{or}/I_{oc}	dB	9	7	9	7	7	9	7	9	-1	-1	-1	-1
<i>PCCPCH RSCP</i>	dBm	-64	-66			-66	-64			-74	-74		
Qoffset		0		0		0		0		0		0	
Qhyst		0		0		0		0		0		0	
Treselection	s	0		0		0		0		0		0	
Sintrasearch	dB	not sent		not sent		not sent		not sent		not sent		not sent	
		Cell 4				Cell 5				Cell 6			
<i>Timeslot</i>		0		8		0		8		0		8	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
<i>UTRA RF Channel Number</i>		Channel 1				Channel 1				Channel 1			
<i>PCCPCH_Ec/Ior</i>	dB	-3	-3			-3	-3			-3	-3		
<i>SCH_Ec/Ior</i>	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
<i>SCH_t_offset</i>		15	15	15	15	20	20	20	20	25	25	25	25
<i>PICH_Ec/Ior</i>	dB			-3	-3			-3	-3			-3	-3
<i>OCNS</i>	dB	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28
\hat{I}_{or}/I_{oc}	dB	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1	-1
<i>PCCPCH RSCP</i>	dBm	-74	-74			-74	-74			-74	-74		
Qoffset		0		0		0		0		0		0	
Qhyst		0		0		0		0		0		0	
Treselection	s	0		0		0		0		0		0	
Sintrasearch	dB	not sent		not sent		not sent		not sent		not sent		not sent	
I_{oc}	dBm/3, 84 MHz	-70											
Propagation Condition		AWGN											

A.4.2.1.1.2 1.28 Mcps TDD option

This scenario implies the presence of 1 carrier and 6 cells as given in Table A.4.1A and A.4.2A.

Table A. 4.1A: General test parameters for Cell Re-selection single carrier multi-cell case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
Final condition	Active cell		Cell2	
Access Service Class (ASC#0) — Persistence value		0..1	1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
T1		s	15	
T2		s	15	

Table A.4.2A: Cell re-selection single carrier multi-cell case

Parameter	Unit	Cell 1				Cell 2				Cell 3			
<i>Timeslot Number</i>		0		DWPTS		0		DWPTS		0		DWPTS	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
<i>UTRA RF Channel Number</i>		Channel 1				Channel 1				Channel 1			
<i>PCCPCH_Ec/I_{or}</i>	DB	-3	-3			-3	-3			-3	-3		
<i>DwPCH_Ec/I_{or}</i>	DB			0	0			0	0			0	0
\hat{I}_{or}/I_{oc}	DB	[9]	[7]	[9]	[7]	[7]	[9]	[7]	[9]	[-1]	[-1]	[-1]	[-1]
<i>PCCPCH RSCP</i>	DBm	[-64]	[-66]			[-66]	[-64]			[-74]	[-74]		
Qoffset		[0]		[0]		[0]		[0]		[0]		[0]	
Qhyst		[0]		[0]		[0]		[0]		[0]		[0]	
Treselection	S	[0]		[0]		[0]		[0]		[0]		[0]	
Sintrasearch	DB	not sent		not sent		not sent		not sent		not sent		not sent	
		Cell 4				Cell 5				Cell 6			
<i>Timeslot</i>		0		DWPTS		0		DWPTS		0		DWPTS	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
<i>UTRA RF Channel Number</i>		Channel 1				Channel 1				Channel 1			
<i>PCCPCH_Ec/I_{or}</i>	DB	-3	-3			-3	-3			-3	-3		
<i>DwPCH_Ec/I_{or}</i>	DB			0	0			0	0			0	0
\hat{I}_{or}/I_{oc}	DB	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]
<i>PCCPCH RSCP</i>	DBm	[-74]	[-74]			[-74]	[-74]			[-74]	[-74]		
Qoffset		[0]		[0]		[0]		[0]		[0]		[0]	
Qhyst		[0]		[0]		[0]		[0]		[0]		[0]	
Treselection	S	[0]		[0]		[0]		[0]		[0]		[0]	
Sintrasearch	DB	[not sent]		[not sent]		[not sent]		[not sent]		[not sent]		[not sent]	
<i>I_{oc}</i>	dBm/1.28 MHz	-70											
Propagation Condition		AWGN											

A.4.2.1.2 Test Requirements

A.4.2.1.2.1 3.84 Mcps TDD option

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the RRC CONNECTION REQUEST message to perform a Location Registration on cell 2.

The cell re-selection delay shall be less than 8 s.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{evaluateTDD}} + T_{\text{SI}}$, where:

$T_{\text{evaluateTDD}}$ A DRX cycle length of 1280ms is assumed for this test case, this leads to a $T_{\text{evaluateTDD}}$ of 6.4s according to Table 4.1 in section 4.2.2.7.

T_{SI} Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8s in the test case.

A.4.2.1.2.2 1.28 Mcps TDD option

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the RRC CONNECTION REQUEST message to perform a Location Registration on cell 2.

The cell re-selection delay shall be less than 8 s.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{evaluateNTDD}} + T_{\text{SI}}$, where:

$T_{\text{evaluateNTDD}}$ A DRX cycle length of 1280ms is assumed for this test case, this leads to a $T_{\text{evaluateNTDD}}$ of 6.4s according to Table 4.1A in section 4.2.

T_{SI} Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8s in the test case.

A.4.2.2 Scenario 2: TDD/TDD cell re-selection multi carrier case

A.4.2.2.1 Test Purpose and Environment

A.4.2.2.1.1 3.84 Mcps TDD option

This test is to verify the requirement for the cell re-selection delay in the multi carrier case reported in section 4.2.2.

This scenario implies the presence of 2 carriers and 6 cells as given in Table A.4.3 and A.4.4. Cell 1 and cell 2 shall belong to different Location Areas.

Table A.4.3: General test parameters for Cell Re-selection in Multi carrier case

	Parameter	Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
Final condition	Active cell		Cell2	
	Access Service Class (ASC#0) - Persistence value		1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
	DRX cycle length	s	1.28	The value shall be used for all cells in the test.
	T1	s	15	
	T2	s	15	

Table A.4.4: Cell re-selection multi carrier multi cell case

Parameter	Unit	Cell 1				Cell 2				Cell 3			
<i>Timeslot Number</i>		0		8		0		8		0		8	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
<i>UTRA RF Channel Number</i>		Channel 1				Channel 2				Channel 1			
<i>PCCPCH_Ec/Ior</i>	dB	-3	-3			-3	-3			-3	-3		
<i>SCH_Ec/Ior</i>	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
<i>SCH_t_offset</i>		0	0	0	0	5	5	5	5	10	10	10	10
<i>PICH_Ec/Ior</i>	dB			-3	-3			-3	-3			-3	-3
<i>OCNS_Ec/Ior</i>	dB	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28
\hat{I}_{or}/I_{oc}	dB	3	0	3	0	0	3	0	3	-3	-3	-3	-3
<i>PCCPCH RSCP</i>	dBm	-70	-73			-73	-70			-76	-76		
Qoffset		0		0		0		0		0		0	
Qhyst		0		0		0		0		0		0	
Treselection	s	0		0		0		0		0		0	
Sintrasearch	dB	not sent		not sent		not sent		not sent		not sent		not sent	
		Cell 4				Cell 5				Cell 6			
<i>Timeslot</i>		0		8		0		8		0		8	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
<i>UTRA RF Channel Number</i>		Channel 1				Channel 2				Channel 2			
<i>PCCPCH_Ec/Ior</i>	dB	-3	-3			-3	-3			-3	-3		
<i>SCH_Ec/Ior</i>	dB	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9	-9
<i>SCH_t_offset</i>		15	15	15	15	20	20	20	20	25	25	25	25
<i>PICH_Ec/Ior</i>	dB			-3	-3			-3	-3			-3	-3
<i>OCNS</i>	dB	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28
\hat{I}_{or}/I_{oc}	dB	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3	-3
<i>PCCPCH RSCP</i>	dBm	-76	-76			-76	-76			-76	-76		
Qoffset		0		0		0		0		0		0	
Qhyst		0		0		0		0		0		0	
Treselection	s	0		0		0		0		0		0	
Sintrasearch	dB	not sent		not sent		not sent		not sent		not sent		not sent	
I_{oc}	dBm/3, 84 MHz	-70											
Propagation Condition		AWGN											

A.4.2.2.1.2 1.28 Mcps TDD option

This scenario implies the presence of 2 carriers and 6 cells as given in Table A.4.3A and A.4.4A. For this test purpose the broadcast repetition period of the target cell shall be [x] s.

Table A.4.3A: General test parameters for Cell Re-selection in Multi carrier case

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
Final condition	Active cell		Cell2	
Access Service Class (ASC#0) - Persistence value			1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
T1		s	15	
T2		s	15	

Table A.4.4A: Cell re-selection multi carrier multi cell case

Parameter	Unit	Cell 1				Cell 2				Cell 3			
<i>Timeslot Number</i>		0		DWPTS		0		DWPTS		0		DWPTS	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
<i>UTRA RF Channel Number</i>		Channel 1				Channel 2				Channel 1			
<i>PCCPCH_Ec/Ior</i>	dB	-3	-3			-3	-3			-3	-3		
<i>DwPCH_Ec/Ior</i>	dB			0	0			0	0			0	0
\hat{I}_{or}/I_{oc}	dB	[9]	[7]	[9]	[7]	[7]	[9]	[7]	[9]	[-1]	[-1]	[-1]	[-1]
<i>PCCPCH RSCP</i>	dBm	[-64]	[-66]			[-66]	[-64]			[-74]	[-74]		
Qoffset		[0]		[0]		[0]		[0]		[0]		[0]	
Qhyst		[0]		[0]		[0]		[0]		[0]		[0]	
Treselection	s	[0]		[0]		[0]		[0]		[0]		[0]	
Qintrasearch	dB	[not sent]		[not sent]		[not sent]		[not sent]		[not sent]		[not sent]	
		Cell 4				Cell 5				Cell 6			
<i>Timeslot</i>		0		DWPTS		0		DWPTS		0		DWPTS	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
<i>UTRA RF Channel Number</i>		Channel				Channel 2				Channel			
<i>PCCPCH_Ec/Ior</i>	dB	-3	-3			-3	-3			-3	-3		
<i>DwPCH_Ec/Ior</i>	dB			0	0			0	0			0	0
\hat{I}_{or}/I_{oc}	dB	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]
<i>PCCPCH RSCP</i>	dBm	[-74]	[-74]			[-74]	[-74]			[-74]	[-74]		
Qoffset		[0]		[0]		[0]		[0]		[0]		[0]	
Qhyst		[0]		[0]		[0]		[0]		[0]		[0]	
Treselection	s	[0]		[0]		[0]		[0]		[0]		[0]	
Qintrasearch	dB	[not sent]		[not sent]		[not sent]		[not sent]		[not sent]		[not sent]	
I_{oc}	dBm/3, 84 MHz	-70											
Propagation Condition		AWGN											

Note: P-CCPCH_RSCP is the quality measure for cell selection and re-selection.

A.4.2.2.2 Test Requirements

A.4.2.2.2.1 3.84 Mcps TDD option

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the RRC CONNECTION REQUEST message to perform a Location Registration on cell 2.

The cell re-selection delay shall be less than 8 s.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{evaluateTDD}} + T_{\text{SI}}$, where:

$T_{\text{evaluateTDD}}$ A DRX cycle length of 1280ms is assumed for this test case, this leads to a $T_{\text{evaluateTDD}}$ of 6.4s according to Table 4.1 in section 4.2.2.7.

T_{SI} Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8s in the test case.

A.4.2.2.2.2 1.28 Mcps TDD option

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the RRC CONNECTION REQUEST message to perform a Location Registration on cell 2.

The cell re-selection delay shall be less than 8 s.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{evaluateNTDD}} + T_{\text{SI}}$, where:

$T_{\text{evaluateNTDD}}$ A DRX cycle length of 1280ms is assumed for this test case, this leads to a $T_{\text{evaluateNTDD}}$ of 6.4s according to Table 4.1A in section 4.2.

T_{SI} Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8s in the test case.

A.4.2.2A Scenario 2A: 3.84 Mcps TDD cell re-selection for 1.28 Mcps TDD UE

A.4.2.2A.1 Test Purpose and Environment

This test is to verify the requirement for the 1.28 Mcps TDD OPTION/TDD cell re-selection delay reported in section 4.2.

This scenario implies the presence of 1 low chip rate (1.28 Mcps TDD OPTION) and 1 high chip rate (TDD) cell as given in Table A.4.3B and A.4.4B.

The ranking of the cells shall be made according to the cell reselection criteria specified in TS25.304.

For this test environment the ranking/mapping function indicated in the broadcast of cell 1 shall be in such a way as to enable the UE to evaluate that the 1.28 Mcps TDD OPTION cell 1 is better ranked as the TDD cell 2 during T1 and the TDD cell 2 is better ranked than the 1.28 Mcps TDD OPTION cell 1 during T2.

Cell 1 and cell 2 shall belong to different Location Areas.

Table A.4.3B: General test parameters for TDD low chip rate to TDD high chip rate cell re-selection

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	1.28 Mcps TDD OPTION cell
	Neighbour cell		Cell2	TDD cell
Final condition	Active cell		Cell2	
Access Service Class (ASC#0) - Persistence value			1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
DRX cycle length		s	1,28	
T1		s	15	Cell 1 better ranked than cell 2
T2		s	15	Cell2 better ranked than cell 1

Table A.4.4B: Test parameters for TDD low chip rate to TDD high chip rate cell re-selection

Parameter	Unit	Cell 1				Cell 2			
		0		DwPts		0		8	
<i>Timeslot Number</i>									
		T1	T2	T 1	T 2	T1	T2	T 1	T 2
<i>UTRA RF Channel Number</i>		Channel 1				Channel 2			
<i>PCCPCH_Ec/Ior</i>	dB	-3	-3			-3	-3		
<i>DwPCH_Ec/Ior</i>	dB			0	0	n.a.		n.a.	
<i>SCH_Ec/Ior</i>	dB	n.a.		n.a.		-9	-9	-9	-9
<i>SCH_t_offset</i>		n.a.		n.a.		0	0	0	0
<i>PICH_Ec/Ior</i>								-3	-3
<i>OCNS</i>	dB	n.a.		n.a.		-4,28	-4,28	-4,28	-4,28
\hat{I}_{or}/I_{oc}	dB	[10]	[7]			[7]	[10]	[7]	[10]
I_{oc}	dBm/3.8 4 MHz	-70							
<i>PCCPCH_RSCP</i>	dBm	[-63]	[-66]			[-66]	[-63]		
Treselection	s	0				0			
Propagation Condition		AWGN				AWGN			

A.4.2.2A.2 Test Requirements

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send the RRC CONNECTION REQUEST message to perform a Location Registration on cell 2.

The cell re-selection delay shall be less than 8 s.

NOTE: The re-selection delay equals $T_{TDD\text{evaluate}} + T_{\text{rep}}$ repetition period of the broadcast information of the selected cell

A.4.2.3 Scenario 3: TDD/FDD cell re-selection

A.4.2.3.1 Test Purpose and Environment

A.4.2.3.1.1 3.84 Mcps TDD option

This test is to verify the requirement for the TDD/FDD cell re-selection delay reported in section 4.2.2.

This scenario implies the presence of 1 TDD and 1 FDD cell as given in Table A.4.5 and A.4.6.

The ranking of the cells shall be made according to the cell reselection criteria specified in TS25.304.

For this test environment the ranking/mapping function indicated in the broadcast of cell 1 shall be in such a way as to enable the UE to evaluate that the TDD cell 1 is better ranked as the FDD cell 2 during T1, and the FDD cell 2 is better ranked (indicating a cell re-selection according to section 4.2.2.4) than the TDD cell 1 during T2.

Cell 1 and cell 2 shall belong to different Location Areas.

Table A.4.5: General test parameters for the TDD/FDD cell re-selection

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	TDD cell
	Neighbour cells		Cell2	FDD cell
Final condition	Active cell		Cell2	
Access Service Class (ASC#0) - Persistence value			1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
T1		s	15	During T1 cell 1 better ranked than cell 2
T2		s	15	During T2 cell 2 better ranked than cell 1

Table A.4.6: TDD/FDD cell re-selection

Parameter	Unit	Cell 1				Cell 2	
		0		8		n.a.	n.a.
Timeslot Number		T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2	
CPICH_Ec/Ior	dB	n.a.		n.a.		-10	-10
PCCPCH_Ec/Ior	dB	-3	-3			-12	-12
SCH_Ec/Ior	dB	-9	-9	-9	-9	-12	-12
SCH_offset		0	0	0	0	n.a.	n.a.
PICH_Ec/Ior				-3	-3	-15	-15
OCNS	dB	-4,28	-4,28	-4,28	-4,28	-0,941	-0,941
\hat{I}_{or}/I_{oc}	dB	3	-2	3	-2	-2	3
I_{oc}	dBm/3.84 MHz	-70					
CPICH_RSCP	dBm	n.a.		n.a.		-82	-77
PCCPCH_RSCP	dBm	-70	-75			n.a.	n.a.
Cell_reselection_and quality_measure						CPICH_RSCP	
Treselection	s	0				0	
Propagation Condition		AWGN				AWGN	

NOTE: The purpose of this test case is to evaluate the delay of the TDD/FDD re-selection process, it is not intended to give reasonable values for a TDD/FDD cell re-selection.

A.4.2.3.1.2 1.28 Mcps TDD option

This test is to verify the requirement for the 1.28 Mcps TDD OPTION/FDD cell re-selection delay reported in section 4.2.

This scenario implies the presence of 1 low chip rate TDD and 1 FDD cell as given in Table A.4.5A and A.4.6A.

The ranking of the cells shall be made according to the cell reselection criteria specified in TS25.304.

For this test environment the ranking/mapping function indicated in the broadcast of cell 1 shall be in such a way as to enable the UE to evaluate that the 1.28 Mcps TDD OPTION cell 1 is better ranked as the FDD cell 2 during T1 and the FDD cell 2 is better ranked than the 1.28 Mcps TDD OPTION cell 1 during T2.

Cell 1 and cell 2 shall belong to different Location Areas.

Table A.4.5A: General test parameters for the TDD/FDD cell re-selection

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	1.28 Mcps TDD OPTION cell
	Neighbour cells		Cell2	
Final condition	Active cell		Cell2	
Access Service Class (ASC#0) - Persistence value			1	Selected so that no additional delay is caused by the random access procedure. The value shall be used for all cells in the test.
DRX cycle length		s	1.28	The value shall be used for all cells in the test.
T1		s	15	
T2		s	15	

Table A.4.6A: Test parameters for the 1.28 Mcps TDD OPTION/FDD cell re-selection

Parameter	Unit	Cell 1				Cell 2	
		DwPts		DwPts		DwPts	
<i>Timeslot Number</i>		0		DwPts		n.a.	
		T1	T2	T1	T2	T1	T2
<i>UTRA RF Channel Number</i>		Channel 1				Channel 2	
<i>PCCPCH_Ec/Ior</i>	dB	-3	-3			-12	-12
<i>DwPCH_Ec/Ior</i>	dB			0	0	n.a.	
<i>CPICH_Ec/Ior</i>	dB	n.a.		n.a.		-10	-10
<i>SCH_Ec/Ior</i>	dB	n.a.		n.a.		-12	-12
<i>PICH_Ec/Ior</i>						-15	-15
<i>OCNS</i>	dB	n.a.		n.a.		-0,941	-0,941
\hat{I}_{or}/I_{oc}	dB	[]	[]			[]	[]
<i>I_{oc}</i>	DBm/1.28 MHz	-70					
<i>PCCPCH_RSCP</i>	dBm	[]	[]			n.a.	n.a.
<i>CPICH_Ec/Io</i>		n.a.				[]	[]
Trerelection	s	0				0	
Propagation Condition		AWGN					

A.4.2.3.2 Test Requirements

A.4.2.3.2.1 3.84 Mcps TDD option

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Location Registration on cell 2.

The cell re-selection delay shall be less than 8 s.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{evaluateFDD}} + T_{\text{SI}}$, where:

$T_{\text{evaluateFDD}}$ See Table 4.1 in section 4.2.2.

T_{SI} Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8s in the test case.

A.4.2.3.2.2 1.28 Mcps TDD option

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send preambles on the PRACH for sending the RRC CONNECTION REQUEST message to perform a Location Registration on cell 2.

The cell re-selection delay shall be less than 8 s.

NOTE:

The cell re-selection delay can be expressed as: $T_{\text{evaluateFDD}} + T_{\text{SI}}$, where:

$T_{\text{evaluateFDD}}$ See Table 4.1A in section 4.2.

T_{SI} Maximum repetition rate of relevant system info blocks that needs to be received by the UE to camp on a cell. 1280 ms is assumed in this test case.

This gives a total of 7.68 s, allow 8s in the test case.

A.4.2.4 Scenario 4: inter RAT cell re-selection

A.4.2.4.1 Test Purpose and Environment

A.4.2.4.1.1 3.84 Mcps TDD option

This test is to verify the requirement for the UTRAN to GSM cell re-selection delay reported in section 4.3.2.1.

This scenario implies the presence of 1 UTRAN serving cell, and 1 GSM cell to be re-selected. Test parameters are given in Table, A.4.7, A.4.8, A.4.9.

The ranking of the cells shall be made according to the cell reselection criteria specified in TS25.304.

For this test environment the ranking/mapping function indicated in the broadcast of cell 1 shall be in such a way as to enable the UE to evaluate that the TDD cell 1 is better ranked as the GSM cell 2 during T1 and the GSM cell 2 is better ranked than the TDD cell 1 during T2.

Cell 1 and cell 2 shall belong to different Location Areas.

Table A.4.7: General test parameters for UTRAN to GSM Cell Re-selection

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	TDD Cell
	Neighbour cell		Cell2	GSM Cell
Final condition	Active cell		Cell2	
DRX cycle length		s	1,28	UTRAN cell
BCCH repetition period (GSM cell)		s	1,87	In GSM the system information is scheduled according to an 8 x (51 x 8) cycle (i.e. a system information message is transmitted every 235 ms). The cell selection parameters in system info 3 and 4 are transmitted at least every second. (GSM 05.02)
T1		s	15	
T2		s	15	

Table A.4.8: Cell re-selection UTRAN to GSM cell case (cell 1)

Parameter	Unit	Cell 1 (UTRA)			
		0		8	
<i>Timeslot Number</i>					
		T1	T2	T1	T2
UTRA RF Channel Number		Channel 1		Channel 1	
PCCPCH_Ec/Ior	dB	-3	-3		
SCH_Ec/Ior	dB	-9	-9	-9	-9
SCH_toffset		0	0	0	0
PICH_Ec/Ior	dB			-3	-3
OCNS_Ec/Ior	dB	-4,28	-4,28	-4,28	-4,28
\hat{I}_{or}/I_{oc}	dB	3	-2	3	-2
I_{oc}	dBm/3, 84 MHz	-70		-70	
PCCPCH RSCP	dBm	-70	-75		
Propagation Condition		AWGN		AWGN	
Treselection	s	0			
Ssearch _{RAT}	dB	not sent			

Table A.4.9: Cell re-selection UTRAN to GSM cell case (cell 2)

Parameter	Unit	Cell 2 (GSM)	
		T1	T2
Absolute RF Channel Number		ARFCN 1	
RXLEV	dBm	-80	-70
RXLEV_ACCESS_MIN	dBm	-100	
MS_TXPWR_MAX_CCH	dBm	30	

NOTE: The purpose of this test case is to evaluate the delay of the TDD/GSM re-selection process, it is not intended to give reasonable values for a TDD/GSM cell re-selection.

A.4.2.4.1.2 1.28 Mcps TDD option

This test is to verify the requirement for the UTRAN to GSM cell re-selection delay reported in section 4.2.

This scenario implies the presence of 1 UTRAN serving cell, and 1 GSM cell to be re-selected. Test parameters are given in Table A.4.7A, A.4.8A, A.4.9A.

The ranking of the cells shall be made according to the cell reselection criteria specified in TS25.304.

For this test environment the ranking/mapping function indicated in the broadcast of cell 1 shall be in such a way as to enable the UE to evaluate that the 1.28 Mcps TDD OPTION cell 1 is better ranked as the GSM cell 2 during T1 and the GSM cell 2 is better ranked than the 1.28 Mcps TDD OPTION cell 1 during T2.

Table A.4.7A: General test parameters for UTRAN (1.28 Mcps TDD OPTION) to GSM Cell Re-selection

Parameter		Unit	Value	Comment
Initial condition	Active cell		Cell1	
	Neighbour cell		Cell2	
Final condition	Active cell		Cell2	
DRX cycle length		s	1,28	
T1		s	15	
T2		s	15	

Table A.4 8A: Cell re-selection UTRAN to GSM cell case (cell 1)

Parameter	Unit	Cell 1 (UTRA)			
		0		DwPTS	
Timeslot Number		0		DwPTS	
		T1	T2	T1	T2
UTRA RF Channel Number		Channel 1		Channel 1	
PCCPCH_Ec/Ior	dB	-3	-3		
DwPCH_Ec/Ior	dB			0	0
\hat{I}_{or}/I_{oc}	dB	[9]	[7]	[9]	[7]
I_{oc}	dBm/1.28 MHz	-70		-70	
PCCPCH RSCP	dBm	[-64]	[-66]		
Propagation Condition		AWGN		AWGN	
Cell_selection_and_reselection_quality_measure		P-CCPCH RSCP			
Treselection	s	[]			
Ssearch _{RAT}	dB	[]			

Table A.4.9A: Cell re-selection UTRAN to GSM cell case (cell 2)

Parameter	Unit	Cell 2 (GSM)	
		T1	T2
Absolute RF Channel Number		ARFCN 1	
RXLEV	dBm	-80	-70
RXLEV_ACCESS_MIN	dBm	-100	
MS_TXPWR_MAX_CCH	dBm	30	

A.4.2.4.2 Test Requirements

A.4.2.4.2.1 3.84 Mpcs TDD option

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send LOCATION UPDATING REQUEST message to perform a Location update.

The cell re-selection delay shall be less than [8] s.

NOTE: The UE shall keep a running average of 4 measurements, thus gives $4 \times 1280\text{ms}$ ($T_{\text{measureGSM}}$ Table 4.1), means 5.12 seconds can elapse from the beginning of time period T2 before the UE has finished the measurements to evaluate that the GSM cell fulfils the re-selection criteria.

The cell selection parameters in the BCCH of the GSM cell in system info 3 and 4 are transmitted at least every second.

A.4.2.4.2.2 1.28 Mcps TDD option

The cell re-selection delay is defined as the time from the beginning of time period T2, to the moment when the UE camps on Cell 2, and starts to send LOCATION UPDATING REQUEST message to perform a Location update.

The cell re-selection delay shall be less than [8] s.

NOTE: The UE shall keep a running average of 4 measurements, thus gives $4 \times 1280\text{ms}$ ($T_{\text{measureGSM}}$ Table 4.5), means 5.12 seconds can elapse from the beginning of time period T2 before the UE has finished the measurements to evaluate that the GSM cell fulfils the re-selection criteria.

The cell selection parameters in the BCCH of the GSM cell in system info 3 and 4 are transmitted at least every second.

A.5 UTRAN Connected Mode Mobility

A.5.1 TDD/TDD Handover

NOTE: This section is included for consistency with numbering with section 5; currently no test covering requirements in sections 5.1.2.1 and 5.1.2.2 exists.

A.5.2 TDD/FDD Handover

NOTE: This section is included for consistency with numbering with section 5 currently no test covering requirements in sections 5.2.2.1 and 5.2.2.2 exists.

A.5.3 TDD/GSM Handover

NOTE: This section is included for consistency with numbering with section 5 currently no test covering requirements in sections 5.3.2.1 and 5.3.2.2 exists.

A.5.4 Cell Re-selection in CELL_FACH

A.5.4.1 3.84 Mcps TDD option

NOTE: The cell re-selection delay is sufficiently covered by the test cases proposed in section A.4. The requirements for interruption in FACH message reception in section 5.4 is not tested. If a suitable test is evaluated it may be included in this section.

A.5.4.2 1.28 Mcps TDD option

A.5.4.2.1 One frequency present in neighbour list

Note: Cell reselection in Cell-FACH is still under discussion.

The purpose of this test is to verify the requirement for the cell re-selection delay in CELL_FACH state in the single carrier case reported in section 5.4.2.1.1.

The test parameters are given in Table A.5.1 and A.5.2

Table A.5.1: General test parameters for Cell Re-selection in CELL_FACH

	Parameter	Unit	Value	Comment
initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
final condition	Active cell		Cell2	
	T1	S		T1 need to be defined so that cell re-selection reaction time is taken into account.
	T2	S		T2 need to be defined so that cell re-selection reaction time is taken into account.

Table A.5.2: Cell specific test parameters for Cell Re-selection in CELL_FACH

Parameter	Unit	Cell 1				Cell 2				Cell 3			
Timeslot Number		0		DWPTS		0		DWPTS		0		DWPTS	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 1				Channel 1			
PCCPCH_Ec/lor	DB	-3	-3			-3	-3			-3	-3		
DwPCH_Ec/lor	DB			0	0			0	0			0	0
\hat{I}_{or}/I_{oc}	DB	[9]	[7]	[9]	[7]	[7]	[9]	[7]	[9]	[-1]	[-1]	[-1]	[-1]
PCCPCH RSCP	DBm	-64	-66			-66	-64			-74	-74		
Qoffset			[]		[]		[]		[]		[]		[]
Qhyst	DBm		[]		[]		[]		[]		[]		[]
Treselection			[]		[]		[]		[]		[]		[]
Qintrasearch	DB		[]		[]		[]		[]		[]		[]
		Cell 4				Cell 5				Cell 6			
Timeslot		0		DWPTS		0		DWPTS		0		DWPTS	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 1				Channel 1			
PCCPCH_Ec/lor	DB	-3	-3			-3	-3			-3	-3		
DwPCH_Ec/lor	DB			0	0			0	0			0	0
\hat{I}_{or}/I_{oc}	DB	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]
PCCPCH RSCP	DBm	-74	-74			-74	-74			-74	-74		
Qoffset			[]		[]		[]		[]		[]		[]
Qhyst	DBm		[]		[]		[]		[]		[]		[]
Treselection			[]		[]		[]		[]		[]		[]
Qintrasearch	DB		[]		[]		[]		[]		[]		[]
I_{oc}	dBm/1.28 MHz	-70											
Propagation Condition		AWGN											

A.5.4.2.2 Two frequency present in neighbour list

The purpose of this test is to verify the requirement for the cell re-selection delay in CELL_FACH state in section 5.4.2.1.2. The test parameters are given in Table A.5.3 and A.5.4.

Table A.5.3: General test parameters for Cell Re-selection in CELL_FACH

	Parameter	Unit	Value	Comment
initial condition	Active cell		Cell1	
	Neighbour cells		Cell2, Cell3, Cell4, Cell5, Cell6	
final condition	Active cell		Cell2	
T1		s		T1 need to be defined so that cell re-selection reaction time is taken into account.
T2		s		T2 need to be defined so that cell re-selection reaction time is taken into account.

Table A.5.4: Cell specific test parameters for Cell re-selection in CELL_FACH state

Parameter	Unit	Cell 1				Cell 2				Cell 3			
Timeslot Number		0		DWPTS		0		DWPTS		0		DWPTS	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2				Channel 1			
PCCPCH_Ec/Ior	DB	-3	-3			-3	-3			-3	-3		
DwPCH_Ec/Ior	DB			0	0			0	0			0	0
\hat{I}_{or}/I_{oc}	DB	[9]	[7]	[9]	[7]	[7]	[9]	[7]	[9]	[-1]	[-1]	[-1]	[-1]
PCCPCH RSCP	DBm	[-64]	[-66]			[-66]	[-64]			[-74]	[-74]		
Qoffset			[]		[]		[]		[]		[]		[]
Qhyst	DBm		[]		[]		[]		[]		[]		[]
Treselection			[]		[]		[]		[]		[]		[]
Qintrasearch	DB		[]		[]		[]		[]		[]		[]
		Cell 4				Cell 5				Cell 6			
Timeslot		0		DWPTS		0		DWPTS		0		DWPTS	
		T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel				Channel 2				Channel			
PCCPCH_Ec/Ior	DB	-3	-3			-3	-3			-3	-3		
DwPCH_Ec/Ior	DB			0	0			0	0			0	0
\hat{I}_{or}/I_{oc}	DB	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]	[-1]
PCCPCH RSCP	DBm	[-74]	[-74]			[-74]	[-74]			[-74]	[-74]		
Qoffset			[]		[]		[]		[]		[]		[]
Qhyst	DBm		[]		[]		[]		[]		[]		[]
Treselection			[]		[]		[]		[]		[]		[]
Qintrasearch	DB		[]		[]		[]		[]		[]		[]
I_{oc}	dBm/1.28 MHz	-70											
Propagation Condition		AWGN											

Note: PCCPCH_RSCP is the quality measure for cell selection and re-selection.

A.5.5 Cell Re-selection in CELL_PCH

NOTE: Requirements for cell re-selection in Cell_PCH state are the same as for cell re-selection in idle mode, therefore no separate test cases are required.

A.5.6 Cell Re-selection in URA_PCH

NOTE: Requirements for cell re-selection in URA_PCH state are the same as for cell re-selection in idle mode, therefore no separate test cases are required.

A.6 Dynamic channel allocation

NOTE: This section is included for consistency with numbering with section 6; currently no test covering requirements in this section exists.

A.7 Timing characteristics

NOTE: This section is included for consistency with numbering with section 7; currently no test covering requirements in this section exists.

A.8 UE Measurements Procedures

A.8.1 TDD intra frequency measurements

A.8.1.1 Event triggered reporting in AWGN propagation conditions

A.8.1.1.1 Test Purpose and Environment

A.8.1.1.1.1 3.84 Mcps TDD option

This test will derive that the terminal makes correct reporting of an event Cell 1 is the active cell, Cell 2 is a neighbour cell on the used frequency. The power level on Cell 1 is kept constant and the power level of Cell 2 is changed using "change of best cell event" as illustrated in Figure A.8-1. The test parameters are shown in Table A.8-1. Hysteresis, absolute Threshold and Time to Trigger values are given in the table below and they are signalled from test device. In the measurement control information it is indicated to the UE that event-triggered reporting with Event 1G shall be used. P-CCPCH RSCP of the best cell has to be reported together with Event 1G reporting. New measurement control information, which defines neighbour cells etc., is always sent before the event starts.

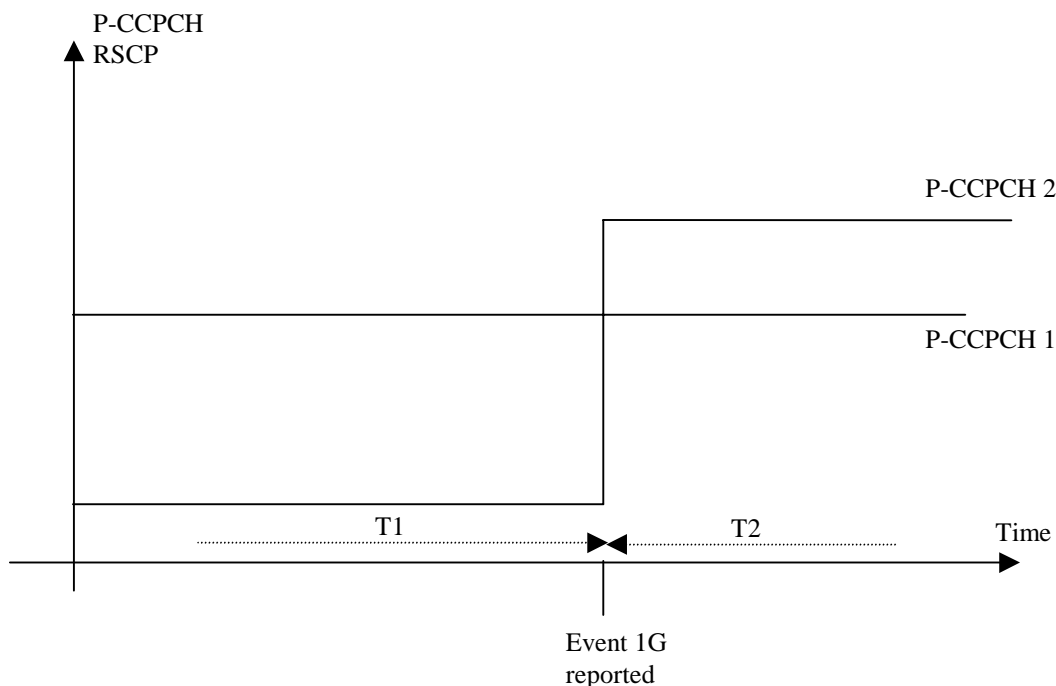


Figure A.8.1: Illustration of parameters for handover measurement reporting test case

Table A.8.1

Parameter	Unit	Cell 1				Cell 2			
		0		8		0		8	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1		Channel 1		Channel 1		Channel 1	
PCCPCH_Ec/lor	dB	-3	-3			-3	-3		
SCH_Ec/lor	dB	-9	-9	-9	-9	-9	-9	-9	-9
SCH_t_offset		0	0	0	0	15	15	15	15
PICH_Ec/lor				-3	-3			-3	-3
OCNS		-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28
\hat{I}_{or}/I_{oc}	dB	3	3	3	3	-Infinity	5	-Infinity	5
I_{oc}	dBm/3.84 MHz	-70							
PCCPCH_RSCP	dB	-70	-70			-Infinity	-68		
Absolute Threshold (SIR)	dB	[]							
Hysteresis	dB	[]							
Time to Trigger	msec	[]							
Propagation Condition		AWGN							

Note: The DPCH of all cells are located in an other timeslot than 0 or 8

A.8.1.1.1.2 1.28 Mcps TDD option

This test will derive that the terminal makes correct reporting of an event Cell 1 is the active cell, Cell 2 is a neighbour cell on the used frequency. The power level on Cell 1 is kept constant and the power level of Cell 2 is changed using "change of best cell event" as illustrated in Figure A. 8.1A. The test parameters are shown in Table A. 8.1A. Hysteresis, absolute Threshold and Time to Trigger values are given in the table below and they are signalled from test device. In the measurement control information it is indicated to the UE that event-triggered reporting with Event 1G shall be used. P-CCPCH RSCP of the best cell has to be reported together with Event 1G reporting. New measurement control information, which defines neighbour cells etc., is always sent before the event starts.

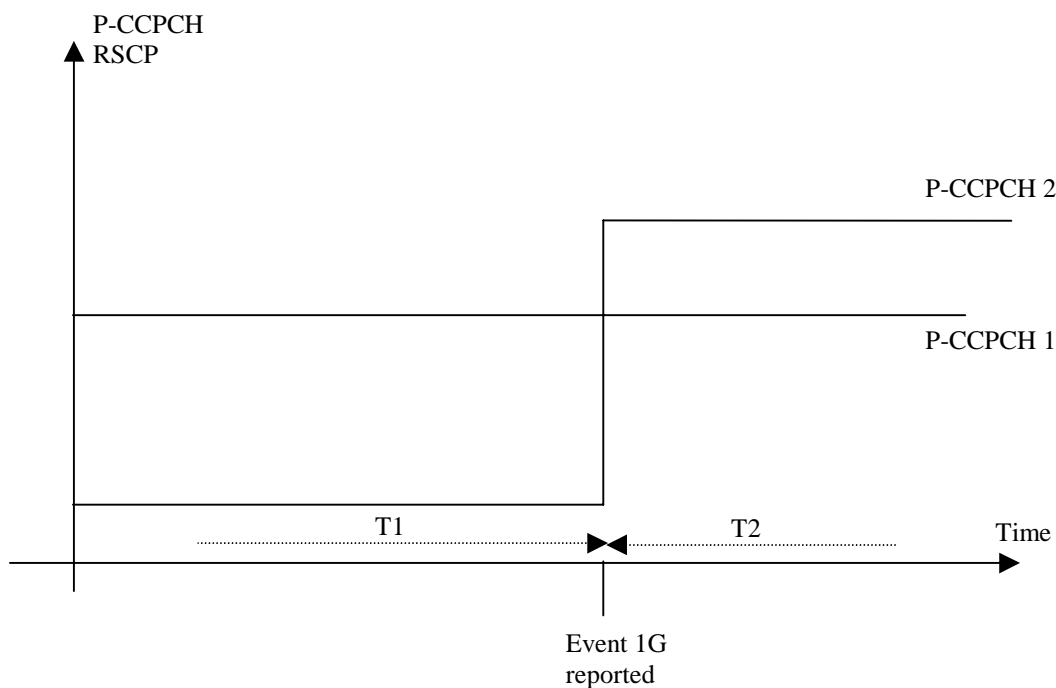


Figure A. 8.1A: Illustration of parameters for handover measurement reporting test case

Table A. 8.1A

Parameter	Unit	Cell 1				Cell 2			
		0		DwPTS		0		DwPTS	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2			
PCCPCH_Ec/Ior	dB	-3				-3			
DwPCH_Ec/Ior	dB			0				0	
\hat{I}_{or}/I_{oc}	dB	[3]	[3]			-Infinity	[6]		
I_{oc}	dBm/1.28 MHz	-70							
PCCPCH_RSCP	dBm	[-70]	[-70]			-Infinity	[-67]		
Absolute Threshold (SIR)	dB	[]							
Hysteresis	dB	[]							
Time to Trigger	msec	[]							
Propagation Condition		AWGN							

NOTE: The DPCH of all cells are located in a timeslot other than 0.

A.8.1.1.2 Test Requirements

The UE shall send one Event 1G triggered measurement report, with a measurement reporting delay less than [480] ms from the beginning of time period T2.

The UE shall not send event triggered measurement reports, as long as the reporting criteria are not fulfilled.

A.8.2 TDD inter frequency measurements

A.8.2.1 Correct reporting of neighbours in AWGN propagation condition

A.8.2.1.1 Test Purpose and Environment

The purpose of this test is to verify that the UE makes correct reporting of an event when doing inter frequency measurements. The test will partly verify the requirements in section 8.1.2.2.

This test will derive that the terminal makes correct reporting of an event Cell 1 is the active cell, Cell 2 is a neighbour cell on the used frequency. The power level on Cell 1 is kept constant and the power level of Cell 2 is changed using "change of best cell event" as illustrated in Figure A.8-2. The test parameters are shown in Table A.8-2. Hysteresis, absolute Threshold and Time to Trigger values are given in the table below and they are signalled from test device. In the measurement control information it is indicated to the UE that event-triggered reporting with Event 2C shall be used. P-CCPCH RSCP of the best cell has to be reported together with Event 2C reporting. New measurement control information, which defines neighbour cells etc., is always sent before the event starts.

The test parameters are shown in Table A.8.2.

Table A.8.2 Cell Specific Parameters for Correct Reporting of Neighbours in AWGN Propagation Condition

Parameter	Unit	Cell 1				Cell 2			
		0		8		0		8	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1		Channel 1		Channel 2		Channel 2	
PCCPCH_Ec/Ior	dB	-3	-3			-3	-3		
SCH_Ec/Ior	dB	-9	-9	-9	-9	-9	-9	-9	-9
SCH_t_offset		0	0	0	0	15	15	15	15
PICH_Ec/Ior				-3	-3			-3	-3
OCNS		-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28	-4,28
\hat{I}_{or}/I_{oc}	dB	3	3	3	3	-Infinity	6	-Infinity	6
I_{oc}	dBm/3.84 MHz	-70							
PCCPCH_RSCP	dB	-70	-70			-Infinity	-67		
Absolute Threshold (SIR)	dB	[]							
Hysteresis	dB	[]							
Time to Trigger	msec	[]							
Propagation Condition		AWGN							

Note: The DPCH of all cells are located in an other timeslot than 0 or 8

A.8.2.1.2 Test Requirements

The UE shall send one Event 2C triggered measurement report, with a measurement reporting delay less than [5] s from the beginning of time period T2.

The UE shall not send any measurement reports, as long as the reporting criteria are not fulfilled.

A.8.3 FDD measurements

A.8.3.1 Correct reporting of FDD neighbours in AWGN propagation condition

A.8.3.1.1 Test Purpose and Environment

A.8.3.1.1.1 3.84 Mcps TDD option

This test will derive that the terminal makes correct reporting of an event. Cell 1 is current active cell, Cell 2 is a FDD cell. The power level of CPICH Ec/Io of cell 2 and the P-CCPCH RSCP of cell 1 is changed. Hysteresis, Absolute threshold and Time to Trigger values are given in the table below and they are signalled from test device. New measurement control information, which defines neighbour cells etc., is always sent before the handover starts. The number of neighbour cells in the measurement control information is FFS. The test parameters are shown in Table A.8.3.

Table A.8.3

Parameter	Unit	Cell 1				Cell 2			
		0		8		n.a.		n.a.	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2			
CPICH_Ec/lor	DB	n.a.		n.a.		[]		[]	
PCCPCH_Ec/lor	DB	-3	-3			[]		[]	
SCH_Ec/lor	DB	-9	-9	-9	-9	[]		[]	
SCH_offset		0	0	0	0	n.a.		n.a.	
PICH_Ec/lor				-3	-3	[]		[]	
DCH_Ec/lor	DB	n.a.	n.a.	n.a.	n.a.	[]		[]	
OCNS	DB	-4,28	-4,28	-4,28	-4,28	[]		[]	
\hat{I}_{or}/I_{oc}	DB	[]		[]		[]		[]	
I_{oc}	dBm/3.84 MHz	-70				-70			
CPICH_Ec/lo		n.a.				[]			
PCCPCH_RSCP	DB	[]		[]		n.a.		n.a.	
Absolute Threshold (SIR)	DB	[]				[]			
Hysteresis	DB	[]				[]			
Time to Trigger	msec	[]				[]			
Propagation Condition		AWGN				AWGN			

Note: The DPCH of the TDD cell is located in an other timeslot than 0 or 8

A.8.3.1.1.2 1.28 Mcps TDD option

The purpose of this test is to verify that the UE makes correct reporting of an event when doing inter frequency measurements. The test will partly verify the requirements in section 8.1.2.2.

This test will derive that the terminal makes correct reporting of an event Cell 1 is the active cell, Cell 2 is a neighbour cell on the used frequency. The power level on Cell 1 is kept constant and the power level of Cell 2 is changed using "change of best cell event" as illustrated in Figure A. 8.1A. The test parameters are shown in Table A. 8.3A. Hysteresis, absolute Threshold and Time to Trigger values are given in the table below and they are signalled from test device. In the measurement control information it is indicated to the UE that event-triggered reporting with Event 2C shall be used. P-CCPCH RSCP of the best cell has to be reported together with Event 2C reporting. New measurement control information, which defines neighbour cells etc., is always sent before the event starts.

The test parameters are shown in Table A. 8.3A.

Table A. 8.3A: Cell Specific Parameters for Correct Reporting of Neighbours in AWGN Propagation Condition

Parameter	Unit	Cell 1				Cell 2			
		0		DwPTS		0		DwPTS	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2			
PCCPCH_Ec/I _{or}	dB	-3				-3			
DwPCH_Ec/I _{or}	dB			0				0	
\hat{I}_{or}/I_{oc}	dB	[3]	[3]			-Infinity	[6]		
I_{oc}	dBm/1.28 MHz	-70							
PCCPCH_RSCP	dBm	[-70]	[-70]			-Infinity	[-67]		
Absolute Threshold (SIR)	dB	[]							
Hysteresis	dB	[]							
Time to Trigger	msec	[]							
Propagation Condition		AWGN							

Note: The DPCH of all cells are located in a timeslot other than 0.

A.8.3.1.2 Test Requirements

A.8.3.1.2.1 3.84 Mcps TDD option

The UE shall send one Event 2C triggered measurement report, with a measurement reporting delay less than [5] seconds from the start of time period T2.

The UE shall not send any measurement reports, as long as the reporting criteria are not fulfilled.

A.8.3.1.2.2 1.28 Mcps TDD option

The UE shall send one Event 2C triggered measurement report, with a measurement reporting delay less than [5] s from the beginning of time period T2.

The UE shall not send any measurement reports, as long as the reporting criteria are not fulfilled.

A.9 Measurement Performance Requirements

Unless explicitly stated:

- Reported measurements shall be within defined range in 90 % of the cases.
- Measurement channel is 12.2 kbps as defined in TS 25.102 annex A. This measurement channel is used both in active cell and cells to be measured.
- Cell 1 is the active cell.
- Single task reporting.
- Power control is active.

A.9.1 Measurement Performance for UE

If not otherwise stated, in this clause the test parameters in table A.9.1 should be applied for 3.84 Mcps TDD UE RX measurements requirements and the test parameters in table A.9.1A should be applied for 1.28 Mcps TDD UE RX measurements requirements.

A.9.1.1 TDD intra frequency measurements

A.9.1.1.1 3.84 Mcps TDD option

In this case all cells are on the same frequency. The table A.9.1 and notes 1-5 define the limits of signal strengths and code powers, where the requirement is applicable.

Table A.9.1 Intra frequency test parameters for UE RX Measurements

Parameter	Unit	Cell 1		Cell 2	
UTRA RF Channel number		Channel 1		Channel 1	
Timeslot		0	8	0	8
P-CCPCH Ec/Ior	dB	-3	-	-3	-
SCH Ec/Ior	dB	-9	-9	-9	-9
PICH Ec/Ior	dB	-	-3	-	-3
OCNS	dB	-4,28	-4,28	-4,28	-4,28
\hat{I}_{or}/I_{oc}	dB	[]		[]	
I_{oc}	dBm/ 3,84 MHz	-70		-70	
Range 1:Io	dBm	-94..-70		-94..-70	
Range 2: Io		-94..-50		-94..-50	
Propagation condition	-	AWGN		AWGN	

Note 1: $P\text{-CCPCH_RSCP}_{1,2} \geq -[102]$ dBm.

Note 2: $|P\text{-CCPCH_RSCP}_1 - P\text{CCPCH_RSCP}_2| \leq 20$ dB.

Note 3: $|I_o - P\text{-CCPCH_Ec/Ior}| \leq [20]$ dB.

Note 4: I_{oc} level shall be adjusted according the total signal power I_o at receiver input and the geometry factor \hat{I}_{or}/I_{oc} .

Note 5: The DPCH of all cells are located in an other timeslot than 0 or 8

A.9.1.1.2 1.28 Mcps TDD option

If not otherwise stated, the test parameters in table A.9.1A should be applied for UE RX measurements requirements in this section.

Table A. 9.1A Intra frequency test parameters for UE RX Measurements

Parameter	Unit	Cell 1				Cell 2			
Timeslot Number		0		DwPTS		0		DwPTS	
		T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2			
PCCPCH_Ec/Ior	dB	-3				-3			
DwPCH_Ec/Ior	dB			0				0	
\hat{I}_{or}/I_{oc}	dB	[3]	[3]			-Infinity	[6]		
I_{oc}	dBm/1.28 MHz	-70							
Range 1:Io	dBm	-94..-70				-94..-70			
Range 2:Io		-94..-50				-94..-50			
Propagation condition		AWGN							

Note 1: $P\text{-CCPCH_RSCP}_{1,2} \geq -[102]$ dBm.

Note 2: $|P\text{-CCPCH_RSCP}_1 - P\text{CCPCH_RSCP}_2| \leq 20$ dB.

Note 3: $|I_o - P\text{-CCPCH_RSCP}| \leq [20]$ dB.

Note 4: I_{oc} level shall be adjusted according the total signal power I_o at receiver input and the geometry factor \hat{I}_{or}/I_{oc} .

Note 5: The DPCH of all cells are located in a timeslot other than 0

A.9.1.2 TDD inter frequency measurements

A.9.1.2.1 3.84 Mcps TDD option

In this case all cells are on the same frequency. The table A.9.2 and notes 1-5 define the limits of signal strengths and code powers, where the requirement is applicable.

Table A.9.2 Inter frequency test parameters for UE RX Measurements

Parameter	Unit	Cell 1		Cell 2	
UTRA RF Channel number		Channel 1		Channel 2	
Timeslot		0	8	0	8
P-CCPCH Ec/Ior	dB	-3	-	-3	-
SCH Ec/Ior	dB	-9	-9	-9	-9
PICH Ec/Ior	dB	-	-3	-	-3
OCNS	dB	-4,28	-4,28	-4,28	-4,28
\hat{I}_{or}/I_{oc}	dB	[]		[]	
I_{oc}	dBm/ 3,84 MHz	-70		-70	
Range 1: I_{oc}	dBm	-94..-70		-94..-70	
Range 2: I_{oc}		-94..-50		-94..-50	
Propagation condition	-	AWGN		AWGN	

Note 1: $P\text{-CCPCH_RSCP}_{1,2} \geq -[102]$ dBm.

Note 2: $|P\text{-CCPCH_RSCP}_1 - P\text{CCPCH_RSCP}_2| \leq 20$ dB.

Note 3: $|I_{oc} - P\text{-CCPCH_Ec/Ior}| \leq [20]$ dB.

Note 4: I_{oc} level shall be adjusted according the total signal power I_{oc} at receiver input and the geometry factor \hat{I}_{or}/I_{oc} .

Note 5: The DPCH of all cells are located in an other timeslot than 0 or 8

A.9.1.2.2 1.28 Mcps TDD option

If not otherwise stated, the test parameters in table A. 9.2A should be applied for UE RX measurements requirements in this section.

Table A. 9.2A: Intra frequency test parameters for UE RX Measurements

Parameter	Unit	Cell 1				Cell 2			
		0		DwPTS		0		DwPTS	
Timeslot Number		T1	T2	T1	T2	T1	T2	T1	T2
UTRA RF Channel Number		Channel 1				Channel 2			
PCCPCH_Ec/Ior	dB	-3				-3			
DwPCH_Ec/Ior	dB			0				0	
\hat{I}_{or}/I_{oc}	dB	[3]	[3]			-Infinity	[6]		
I_{oc}	dBm/1.28 MHz	-70							
Range 1: I_{oc}	dBm	-94..-70				-94..-70			
Range 2: I_{oc}		-94..-50				-94..-50			
Propagation condition		AWGN							

Note 1: $P\text{-CCPCH_RSCP}_{1,2} \geq -[102]$ dBm.

Note 2: $|P\text{-CCPCH_RSCP}_1 - P\text{CCPCH_RSCP}_2| \leq 20$ dB.

Note 3: $|I_{oc} - P\text{-CCPCH_RSCP}_{1,2}| \leq [20]$ dB.

Note 4: I_{oc} level shall be adjusted according the total signal power I_{oc} at receiver input and the geometry factor \hat{I}_{or}/I_{oc} .

Note 5: The DPCH of all cells are located in a timeslot other than 0

A.9.1.3 FDD inter frequency measurements

A.9.1.3.1 3.84 Mcps TDD option

In this case both cells are in different frequency. Table A.9.3 and notes 1-6 define the limits of signal strengths and code powers, where the requirement is applicable.

Table A.9.3 CPICH Inter frequency test parameters

Parameter	Unit	Cell 1		Cell 2
Timeslot Number		0	8	n.a
UTRA RF Channel Number		Channel 1		Channel 2
CPICH_Ec/Ior	dB	n.a.	n.a.	-10
P-CCPCH_Ec/Ior	dB	-3		-12
SCH_Ec/Ior	dB	-9	-9	-12
SCH_toffset		0	0	n.a.
PICH_Ec/Ior			-3	-15
DPCH_Ec/Ior	dB	n.a.	n.a.	-15
OCNS	dB	-4.28	-4.28	-1,11
\hat{I}_{or}/I_{oc}	dB	[]	[]	10,5
I_{oc}	dBm/3,84 MHz	-70		Note 5
Range 1: Ior	dBm	-94..-70		-94..-70
Range 2: Ior		-94..-50		-94..-50
Propagation condition	-	AWGN		AWGN

Note 1: $CPICH_RSCP_{1,2} \geq -114$ dBm.

Note 2: $|CPICH_RSCP_1 - CPICH_RSCP_2| \leq 20$ dB

Note 3: $|Channel\ 1_I_{or} - Channel\ 2_I_{or}| \leq 20$ dB

Note 4: $|I_{or} - CPICH_Ec/I_{or}| \leq 20$ dB

Note 5: I_{oc} level shall be adjusted in each carrier frequency according the total signal power I_{or} at receiver input and the geometry factor \hat{I}_{or}/I_{oc} . $I_{or} - 10,6$ dB = I_{oc}

Note 6: The DPCH of the TDD cell is located in an other timeslot than 0 or 8

A.9.1.4 UTRA carrier RSSI inter frequency measurements

A.9.1.4.1 3.84 Mcps TDD option

The table A.9.4 and notes 1,2 define the limits of signal strengths, where the requirement is applicable.

Table A.9.4: UTRA carrier RSSI Inter frequency test parameters

Parameter	Unit	Cell 1	Cell 2
UTRA RF Channel number	-	Channel 1	Channel 2
\hat{I}_{or}/I_{oc}	dB	-1	-1
I_{oc}	dBm/ 3.84 MHz	Note 2	Note 2
Range 1: Ior	dBm/ 3,84 MHz	-94...-70	
Range 2: Ior		-94...-50	
Propagation condition	-	AWGN	
Note 1:	For relative accuracy requirement $ Channel\ 1_I_{or} - Channel\ 2_I_{or} < 20$ dB.		
Note 2:	I_{oc} level shall be adjusted according the total signal power I_{or} at receiver input and the geometry factor \hat{I}_{or}/I_{oc} .		

A.9.1.4.2 1.28 Mcps TDD option

The table A.9.4A and notes 1,2 define the limits of signal strengths, where the requirement is applicable.

Table A.9.4A: UTRA carrier RSSI Inter frequency test parameters

Parameter	Unit	Cell 1	Cell 2
UTRA RF Channel number	-	Channel 1	Channel 2
\hat{I}_{or}/I_{oc}	DB	-1	-1
I_{oc}	dBm/1.28 MHz	Note 2	Note 2
Range 1: I_{oc}	dBm/1.28 MHz	-94...-70	-94...-70
Range 2: I_{oc}	dBm/1.28 MHz	-94...-50	-94...-50
Propagation condition	-	AWGN	

Note 1: For relative accuracy requirement / $Channel\ 1_{Io} - Channel\ 2_{Io}$ / < 20 dB.

Note 2: I_{oc} level shall be adjusted according the total signal power I_o at receiver input and the geometry factor \hat{I}_{or}/I_{oc} .

A.9.2 Measurement Performance for UTRAN

A.9.2.1 UTRAN RX measurements

A.9.2.1.1 3.84 Mcps TDD option

If not otherwise stated, the test parameters in table A.9.5 should be applied for UTRAN RX measurements requirements in this clause.

Table A.9.5: Intra frequency test parameters for UTRAN RX Measurements

Parameter	Unit	Cell 1
UTRA RF Channel number		Channel 1
Timeslot		[]
DPCH E_c/I_{or}	dB	[]
\hat{I}_{or}/I_{oc}	dB	[]
I_{oc}	dBm/ 3,84 MHz	-89
Range: I_{oc}	dBm	-105..-74
Propagation condition	-	AWGN

A.9.2.1.2 1.28 Mcps TDD option

If not otherwise stated, the test parameters in table A.9.5A should be applied for UTRAN RX measurements requirements in this section.

Table A.9.5A: Intra frequency test parameters for UTRAN RX Measurements

Parameter	Unit	Cell 1
UTRA RF Channel number		Channel 1
Timeslot		[]
DPCH E_c/I_{or}	dB	[]
\hat{I}_{or}/I_{oc}	dB	[]
I_{oc}	dBm/1.28 MHz	-89
Range: I_{oc}	dBm	-105..-74
Propagation condition		AWGN

Annex B (informative): Change History

Table B.1: CRs approved by TSG-RAN#7.

RAN Doc	Spec	CR	R	Ph	Subject	Cat	Curr	New
RP-000020	25.123	001		R99	Update of test requirements for TDD/TDD Handover	F	3.0.0	3.1.0
RP-000020	25.123	002		R99	Update of the requirements for TDD/FDD Handover	F	3.0.0	3.1.0
RP-000020	25.123	003		R99	Update of Cell Selection and Re-selection sections	C	3.0.0	3.1.0
RP-000020	25.123	004		R99	Update of Power management and Radio Link Surveillance sections	F	3.0.0	3.1.0
RP-000020	25.123	005		R99	Update of measurements performance requirements	F	3.0.0	3.1.0
RP-000020	25.123	006		R99	Inclusion of transport channel BER	F	3.0.0	3.1.0
RP-000020	25.123	007		R99	Receiver Timing Advance	F	3.0.0	3.1.0
April 2000	25.123	-	-	R99	MCC Editorial update and clause 10 renumbering	A	3.1.0	3.1.1

Table B.2: CRs approved by TSG-RAN#8.

RAN Doc	Spec	CR	R	Ph	Subject	Cat	Curr	New
RP-000209	25.123	008		R99	Correction of UTRAN "Transmitted carrier power" accuracy requirements	F	3.1.1	3.2.0
RP-000209	25.123	009		R99	Measurement reporting delay	F	3.1.1	3.2.0
RP-000209	25.123	010		R99	Update of UE SIR Measurements performance requirements	F	3.1.1	3.2.0
RP-000209	25.123	011		R99	UE Transport Channel BLER measurement	F	3.1.1	3.2.0
RP-000209	25.123	012		R99	Editorial corrections of 25.123	F	3.1.1	3.2.0
RP-000209	25.123	013		R99	Range and mapping in TS 25.123 (TDD)	F	3.1.1	3.2.0
RP-000209	25.123	014		R99	Requirement for UE Tx Power Measurement	F	3.1.1	3.2.0
RP-000209	25.123	015		R99	Addition of test parameters to RRM Measurements performance requirements	F	3.1.1	3.2.0

Table B.3: CRs approved by TSG-RAN#9.

RAN Doc	Spec	CR	R	Ph	Subject	Cat	Curr	New
RP-000399	25.123	16		R99	Handling of measurement uncertainties in conformance testing (TDD) for RRM measurements	F	3.2.0	3.3.0
RP-000399	25.123	17		R99	Basestation Physical Channel BER Measurement	F	3.2.0	3.3.0
RP-000399	25.123	18		R99	Repetition Period of System Information	F	3.2.0	3.3.0
RP-000399	25.123	19		R99	RRC connection mobility in cell_FACH, cell_PCH and URA_PCH	F	3.2.0	3.3.0
RP-000399	25.123	20		R99	Basestation SIR Measurement	F	3.2.0	3.3.0
RP-000399	25.123	21		R99	UE SIR Measurement Accuracy	F	3.2.0	3.3.0
RP-000399	25.123	22		R99	UE TS ISCP range/mapping correction	F	3.2.0	3.3.0
RP-000399	25.123	23		R99	Alignment of TDD measurements for UE: SFN-CFN observed time difference	F	3.2.0	3.3.0
RP-000399	25.123	24		R99	UTRAN Transport Channel BLER	F	3.2.0	3.3.0
RP-000399	25.123	25		R99	Accuracy requirements for Node-B synchronization	F	3.2.0	3.3.0
RP-000399	25.123	26		R99	Alignment of TDD measurements with FDD: GPS related measurements	F	3.2.0	3.3.0

Table B.4: CRs approved by TSG RAN #10

RAN Doc	Spec	CR	R	Ph	Subject	Cat	Curr	New
RP-000590	25.123	27		R99	Re-structuring TS 25.123 Section 3	F	3.3.0	3.4.0
RP-000590	25.123	28		R99	Re-structuring TS 25.123 Section 4+A4	F	3.3.0	3.4.0
RP-000590	25.123	29		R99	Re-structuring TS 25.123 Section 5	F	3.3.0	3.4.0
RP-000590	25.123	30		R99	Re-structuring TS 25.123 Section A5	F	3.3.0	3.4.0
RP-000590	25.123	31		R99	Re-structuring TS 25.123 Section 6+7	F	3.3.0	3.4.0
RP-000590	25.123	32		R99	Re-structuring TS 25.123 Section 8+A8	F	3.3.0	3.4.0
RP-000590	25.123	33		R99	Re-structuring TS 25.123 Section 9+A9	F	3.3.0	3.4.0
RP-000590	25.123	34		R99	Re-structuring TS 25.123 Annex A1-3	F	3.3.0	3.4.0

Table B.5: Release 99 CRs approved by TSG RAN #11

RAN Doc	Spec	CR	R	Ph	Subject	Cat	Curr	New
RP-010090	25.123	35		R99	Deletion of cell-selection requirements	F	3.4.0	3.5.0
RP-010090	25.123	37		R99	Corrections in idle mode and corresponding test cases.	F	3.4.0	3.5.0
RP-010090	25.123	38		R99	Section 8 changes	F	3.4.0	3.5.0
RP-010090	25.123	39		R99	Section 9 Changes	F	3.4.0	3.5.0
RP-010090	25.123	40		R99	Correction of the cell-reselection and handover requirements in connected mode.	F	3.4.0	3.5.0
RP-010090	25.123	41		R99	Change and completion of the cell-reselection requirements in CELL-FACH state.	F	3.4.0	3.5.0
RP-010090	25.123	42		R99	Change of the cell-reselection requirements.	F	3.4.0	3.5.0
RP-010090	25.123	43		R99	Extension of reporting range for UTRAN UL measurements	F	3.4.0	3.5.0

Table B.6: Release 4 CRs approved by TSG RAN #11

RAN Doc	Spec	CR	R	Ph	Subject	Cat	Curr	New
RP-010097	25.123	44		R4	Requirements for Support of Radio Resources Management (TDD) for 1.28 Mcps TDD	B	3.5.0	4.0.0
RP-010099	25.123	45		R4	UE/UTRAN GPS timing of Cell Frames for UP	B	3.5.0	4.0.0
RP-010101	25.123	36		R4	NodeB Synchronisation Measurements performance requirements	B	3.5.0	4.0.0

History

Document history		
V4.0.0	March 2001	Publication