

# ETSI TS 129 122 V18.7.0 (2024-09)



**Universal Mobile Telecommunications System (UMTS);  
LTE;  
5G;  
T8 reference point for Northbound APIs  
(3GPP TS 29.122 version 18.7.0 Release 18)**



---

**Reference**

RTS/TSGC-0329122vi70

---

**Keywords**

5G,LTE,UMTS

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our  
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	20
1 Scope .....	21
2 References .....	21
3 Definitions and abbreviations.....	23
3.1 Definitions .....	23
3.2 Abbreviations .....	24
4 T8 reference point .....	24
4.1 Overview .....	24
4.2 Reference model.....	25
4.3 Functional elements.....	26
4.3.1 SCEF.....	26
4.3.2 SCS/AS .....	26
4.4 Procedures over T8 reference point.....	26
4.4.1 Introduction.....	26
4.4.2 Monitoring Procedures .....	26
4.4.2.1 General .....	26
4.4.2.2 Monitoring Events Configuration .....	26
4.4.2.2.1 General .....	26
4.4.2.2.2 Monitoring Events Configuration via HSS.....	28
4.4.2.2.2.1 General.....	28
4.4.2.2.2.2 Configuration Request for an individual UE .....	29
4.4.2.2.2.3 Configuration Request for a group of UEs .....	29
4.4.2.2.3 Monitoring Events Configuration directly via MME/SGSN .....	30
4.4.2.2.4 Monitoring Events Configuration via PCRF .....	31
4.4.2.2.4.1 General.....	31
4.4.2.2.4.2 Configuration Request for an individual UE .....	31
4.4.2.2.4.3 Configuration Request for a group of UEs .....	31
4.4.2.3 Reporting of Monitoring Event Procedure.....	32
4.4.2.4 Network-initiated Explicit Monitoring Event Deletion Procedure.....	32
4.4.2.5 Network initiated notification of applied parameter configuration .....	33
4.4.3 Procedures for resource management of Background Data Transfer.....	33
4.4.4 Procedures for changing the chargeable party at session set up or during the session.....	34
4.4.5 Procedures for Non-IP Data Delivery .....	35
4.4.5.1 General .....	35
4.4.5.2 NIDD Configuration .....	35
4.4.5.2.1 NIDD Configuration for a single UE.....	35
4.4.5.2.2 NIDD Configuration for a group of UEs .....	36
4.4.5.3 Mobile Terminated NIDD procedure .....	36
4.4.5.3.1 Mobile Terminated NIDD for a single UE .....	36
4.4.5.3.2 Mobile Terminated NIDD for a group of UEs .....	38
4.4.5.4 Mobile Originated NIDD procedure .....	39
4.4.5.5 NIDD Authorisation Update procedure .....	39
4.4.5.6 Port Management Configuration .....	40
4.4.5.6.1 Port Reservation and Release .....	40
4.4.5.6.2 Port Notification .....	41
4.4.6 Procedures for Device Triggering.....	41
4.4.7 Procedures for Group Message Delivery .....	42
4.4.7.1 General .....	42
4.4.7.2 Group Message Delivery via MBMS .....	42
4.4.7.2.1 General .....	42
4.4.7.2.2 Group Message Delivery via MBMS by MB2 .....	42

4.4.7.2.2.1	TMGI Allocation .....	42
4.4.7.2.2.2	TMGI Deallocation.....	43
4.4.7.2.2.3	Creation of group message delivery.....	43
4.4.7.2.2.4	Modification of previous submitted group message delivery .....	44
4.4.7.2.2.5	Cancellation of previous submitted group message delivery .....	44
4.4.7.2.3	Group message Delivery via MBMS by xMB.....	45
4.4.7.2.3.1	Service Creation.....	45
4.4.7.2.3.2	Service Deletion.....	45
4.4.7.2.3.3	Creation of group message delivery.....	45
4.4.7.2.3.4	Modification of previous submitted group message delivery .....	46
4.4.7.2.3.5	Cancellation of previous submitted group message delivery .....	46
4.4.8	Procedures for Reporting of Network Status .....	46
4.4.8.1	General .....	46
4.4.8.2	Network Status Reporting Subscription .....	46
4.4.8.3	Network Status Reporting Notification.....	47
4.4.9	Procedures for Communication Pattern Parameters Provisioning .....	47
4.4.10	Procedures for PFD Management .....	48
4.4.11	Procedures for Enhanced Coverage Restriction Control.....	50
4.4.12	Procedures for Network Parameter Configuration.....	51
4.4.12.1	General .....	51
4.4.12.2	Configuration Request for an individual UE.....	51
4.4.12.3	Configuration Request for a group of UEs.....	52
4.4.12.4	Notification of applied parameter configuration .....	52
4.4.13	Procedures for setting up an AS session with required QoS.....	52
4.4.14	Procedures for MSISDN-less Mobile Originated SMS .....	54
4.4.14.1	General .....	54
4.4.14.2	Delivery of MSISDN-less MO SMS.....	54
4.4.15	Procedures for RACS Parameter Provisioning .....	54
5	T8 APIs .....	55
5.1	Introduction .....	55
5.2	Information applicable to several APIs .....	56
5.2.1	Data Types .....	56
5.2.1.1	Introduction .....	56
5.2.1.2	Referenced structured data types.....	60
5.2.1.2.1	Type: SponsorInformation.....	60
5.2.1.2.2	Type: UsageThreshold.....	60
5.2.1.2.3	Type: TimeWindow.....	60
5.2.1.2.4	Type: Acknowledgement.....	61
5.2.1.2.5	Type: NotificationData .....	61
5.2.1.2.6	Type: EventReport.....	61
5.2.1.2.7	Type: AccumulatedUsage.....	61
5.2.1.2.8	Type: FlowInfo.....	61
5.2.1.2.9	Type: TestNotification.....	62
5.2.1.2.10	Type: WebsocketNotifConfig .....	62
5.2.1.2.11	Type: LocationArea.....	62
5.2.1.2.12	Type: ProblemDetails .....	63
5.2.1.2.13	Type: InvalidParam .....	63
5.2.1.2.14	Type: PlmnId .....	64
5.2.1.2.15	Type: ConfigResult .....	64
5.2.1.2.16	Type: UsageThresholdRm.....	64
5.2.1.2.17	Type: LocationArea5G .....	64
5.2.1.2.18	Type: EthFlowInfo .....	65
5.2.1.3	Referenced Simple data types and enumerations .....	65
5.2.1.3.1	Introduction .....	65
5.2.1.3.2	Simple data types.....	65
5.2.1.3.3	Enumeration: Event .....	66
5.2.1.3.4	Enumeration: ResultReason .....	67
5.2.1.4	Conventions for documenting structured data types .....	67
5.2.2	Usage of HTTP .....	68
5.2.2.1	General .....	68
5.2.2.2	Usage of the HTTP PATCH method.....	68

5.2.3	Content type.....	68
5.2.4	URI structure .....	69
5.2.4.1	Resource URI structure .....	69
5.2.4.2	Custom operations URI structure .....	69
5.2.4.3	Callback URI structure.....	69
5.2.5	Notifications .....	70
5.2.5.1	General .....	70
5.2.5.2	Notification Delivery using a separate HTTP connection.....	70
5.2.5.3	Notification Test Event .....	70
5.2.5.4	Notification Delivery using WebSocket .....	70
5.2.6	Error handling.....	72
5.2.7	Feature negotiation .....	75
5.2.8	HTTP custom headers.....	75
5.2.8.1	General .....	75
5.2.8.2	Reused HTTP custom headers .....	75
5.2.8.3.1	General .....	75
5.2.9	Conventions for Open API specification files .....	77
5.2.9.1	General .....	77
5.2.9.2	Formatting of OpenAPI files.....	77
5.2.9.3	Structured data types .....	77
5.2.9.4	Info .....	79
5.2.9.5	Servers.....	79
5.2.9.6	References to other 3GPP-defined Open API specification files .....	79
5.2.9.7	Server-initiated communication .....	80
5.2.9.8	Describing the body of HTTP PATCH requests .....	80
5.2.9.8.1	General .....	80
5.2.9.8.2	JSON Merge Patch .....	81
5.2.9.8.3	JSON PATCH .....	81
5.2.9.9	Error Responses .....	81
5.2.9.10	Enumerations .....	82
5.2.9.11	Read only attribute .....	83
5.2.9.12	externalDocs.....	83
5.2.9.13	Operation identifiers.....	83
5.2.9.14	Usage of the "tags" field.....	84
5.2.10	Redirection handling.....	84
5.2.11	Support of Load and Overload Control.....	84
5.2.12	Query parameters.....	85
5.2.13	Vendor-specific extensions .....	86
5.2.13.1	General .....	86
5.2.13.2	Vendor-specific extensions to the data model.....	86
5.2.13.3	Vendor-specific query parameters.....	86
5.3	MonitoringEvent API.....	87
5.3.1	Overview .....	87
5.3.2	Data model.....	87
5.3.2.1	Resource data types.....	87
5.3.2.1.1	Introduction .....	87
5.3.2.1.2	Type: MonitoringEventSubscription .....	91
5.3.2.1.3	Void.....	104
5.3.2.2	Notification data types .....	104
5.3.2.2.1	Introduction .....	104
5.3.2.2.2	Type: MonitoringNotification .....	104
5.3.2.3	Referenced structured data types.....	104
5.3.2.3.1	Introduction .....	104
5.3.2.3.2	Type: MonitoringEventReport .....	105
5.3.2.3.3	Type: IdleStatusInfo .....	110
5.3.2.3.4	Type: UePerLocationReport.....	111
5.3.2.3.5	Type: LocationInfo.....	111
5.3.2.3.6	Type: FailureCause.....	114
5.3.2.3.7	Type: PdnConnectionInformation .....	114
5.3.2.3.8	Type: AppliedParameterConfiguration .....	115
5.3.2.3.9	Type: ApiCapabilityInfo.....	115
5.3.2.3.10	Type: MonitoringEventReports.....	116

5.3.2.3.11	Type: UavPolicy .....	116
5.3.2.3.11	Type: ConsentRevocNotif .....	116
5.3.2.3.12	Type: ConsentRevoked .....	117
5.3.2.3.13	Type: GroupMembListChanges .....	117
5.3.2.3.14	Void .....	117
5.3.2.3.15	Void .....	117
5.3.2.3.16	Void .....	117
5.3.2.3.17	Type: UpLocRepAddrAfRm .....	117
5.3.2.3.18	Type: UpCumEvtRep .....	118
5.3.2.4	Referenced simple data types and enumerations .....	118
5.3.2.4.1	Introduction .....	118
5.3.2.4.2	Simple data types .....	118
5.3.2.4.3	Enumeration: MonitoringType .....	118
5.3.2.4.4	Enumeration: ReachabilityType .....	119
5.3.2.4.5	Enumeration: LocationType .....	120
5.3.2.4.6	Enumeration: AssociationType .....	120
5.3.2.4.7	Enumeration: Accuracy .....	120
5.3.2.4.8	Enumeration: PdnConnectionStatus .....	121
5.3.2.4.9	Enumeration: PdnType .....	121
5.3.2.4.10	Enumeration: InterfaceIndication .....	121
5.3.2.4.11	Enumeration: LocationFailureCause .....	122
5.3.2.4.12	Enumeration: SubType .....	122
5.3.2.4.13	Enumeration: SACRepFormat .....	122
5.3.3	Resource structure .....	122
5.3.3.1	General .....	122
5.3.3.2	Resource: Monitoring Event Subscriptions .....	123
5.3.3.2.1	Introduction .....	123
5.3.3.2.2	Resource definition .....	123
5.3.3.2.3	Resource methods .....	123
5.3.3.2.3.1	GET .....	123
5.3.3.2.3.2	PUT .....	124
5.3.3.2.3.3	PATCH .....	125
5.3.3.2.3.4	POST .....	125
5.3.3.2.3.5	DELETE .....	126
5.3.3.3	Resource: Individual Monitoring Event Subscription .....	126
5.3.3.3.1	Introduction .....	126
5.3.3.3.2	Resource definition .....	126
5.3.3.3.3	Resource methods .....	126
5.3.3.3.3.1	GET .....	126
5.3.3.3.3.2	PUT .....	127
5.3.3.3.3.3	PATCH .....	128
5.3.3.3.3.4	POST .....	129
5.3.3.3.3.5	DELETE .....	129
5.3.3.4	Void .....	130
5.3.3A	Notifications .....	130
5.3.3A.1	General .....	130
5.3.3A.2	Monitoring Notification .....	131
5.3.3A.2.1	Description .....	131
5.3.3A.2.2	Target URI .....	131
5.3.3A.2.3	Standard Methods .....	131
5.3.3A.2.3.1	Notification via POST .....	131
5.3.3A.2.3.2	Notification via WebSocket .....	132
5.3.3A.3	User Consent Revocation Notification .....	132
5.3.3A.3.1	Description .....	132
5.3.3A.3.2	Target URI .....	132
5.3.3A.3.3	Operation Definition .....	133
5.3.3A.3.3.1	Notification via HTTP POST .....	133
5.3.3A.3.3.2	Notification via WebSocket .....	133
5.3.4	Used Features .....	133
5.3.5	Error handling .....	137
5.3.5.1	General .....	137
5.3.5.2	Protocol Errors .....	137

5.3.5.3	Application Errors.....	137
5.4	ResourceManagementOfBdt API.....	140
5.4.1	Overview .....	140
5.4.2	Data model.....	140
5.4.2.1	Resource data types.....	140
5.4.2.1.1	Introduction .....	140
5.4.2.1.2	Type: Bdt.....	140
5.4.2.1.3	Type: BdtPatch.....	141
5.4.2.1.4	Type: ExNotification .....	142
5.4.2.2	Referenced structured data types.....	142
5.4.2.2.1	Introduction .....	142
5.4.2.2.2	Type: TransferPolicy .....	142
5.4.2.3	Referenced simple data types and enumerations.....	143
5.4.2.3.1	Introduction .....	143
5.4.2.3.2	Simple data types.....	143
5.4.3	Resource structure.....	143
5.4.3.1	General .....	143
5.4.3.2	Resource: BDT Subscriptions .....	144
5.4.3.2.1	Introduction .....	144
5.4.3.2.2	Resource definition.....	144
5.4.3.2.3	Resource methods.....	144
5.4.3.2.3.1	GET.....	144
5.4.3.2.3.2	PUT.....	145
5.4.3.2.3.3	PATCH .....	145
5.4.3.2.3.4	POST.....	145
5.4.3.2.3.5	DELETE .....	146
5.4.3.3	Resource: Individual BDT Subscription .....	146
5.4.3.3.1	Introduction .....	146
5.4.3.3.2	Resource definition.....	146
5.4.3.3.3	Resource methods.....	146
5.4.3.3.3.1	GET.....	146
5.4.3.3.3.2	PUT.....	147
5.4.3.3.3.3	PATCH .....	148
5.4.3.3.3.4	POST.....	149
5.4.3.3.3.5	DELETE .....	149
5.4.3.4	Void.....	150
5.4.3A	Notifications .....	150
5.4.3A.1	General .....	150
5.4.3A.2	BDT Warning Notification .....	151
5.4.3A.2.1	Description .....	151
5.4.3A.2.2	Target URI.....	151
5.4.3A.2.3	Standard Methods.....	151
5.4.3A.2.3.1	Notification via POST.....	151
5.4.3A.2.3.2	Notification via WebSocket.....	152
5.4.4	Used Features.....	152
5.4.5	Error handling.....	152
5.4.5.1	General .....	152
5.4.5.2	Protocol Errors .....	152
5.4.5.3	Application Errors .....	152
5.5	ChargeableParty API.....	153
5.5.1	Overview .....	153
5.5.2	Data model.....	153
5.5.2.1	Resource data types.....	153
5.5.2.1.1	Introduction .....	153
5.5.2.1.2	Type: ChargeableParty .....	153
5.5.2.1.3	Type: ChargeablePartyPatch .....	156
5.5.3	Resource structure.....	156
5.5.3.1	General .....	156
5.5.3.2	Resource: Chargeable Party Transactions .....	157
5.5.3.2.1	Introduction .....	157
5.5.3.2.2	Resource definition.....	157
5.5.3.2.3	Resource methods.....	157



5.5.3.2.3.1	GET.....	157
5.5.3.2.3.2	PUT.....	158
5.5.3.2.3.3	PATCH.....	159
5.5.3.2.3.4	POST.....	159
5.5.3.2.3.5	DELETE.....	159
5.5.3.3	Resource: Individual Chargeable Party Transaction.....	159
5.5.3.3.1	Introduction.....	159
5.5.3.3.2	Resource definition.....	159
5.5.3.3.3	Resource methods.....	160
5.5.3.3.3.1	GET.....	160
5.5.3.3.3.2	PUT.....	160
5.5.3.3.3.3	PATCH.....	160
5.5.3.3.3.4	POST.....	161
5.5.3.3.3.5	DELETE.....	161
5.5.3.4	Void.....	162
5.5.3A	Notifications.....	162
5.5.3A.1	General.....	162
5.5.3A.2	Event Notification.....	163
5.5.3A.2.1	Description.....	163
5.5.3A.2.2	Target URI.....	163
5.5.3A.2.3	Standard Methods.....	163
5.5.3A.2.3.1	Notification via POST.....	163
5.5.3A.2.3.2	Notification via WebSocket.....	164
5.5.4	Used Features.....	164
5.5.5	Error handling.....	164
5.5.5.1	General.....	164
5.5.5.2	Protocol Errors.....	164
5.5.5.3	Application Errors.....	164
5.6	NIDD API.....	165
5.6.1	Overview.....	165
5.6.2	Data model.....	165
5.6.2.1	Resource data types.....	165
5.6.2.1.1	Introduction.....	165
5.6.2.1.2	Type: NiddConfiguration.....	166
5.6.2.1.3	Type: NiddDownlinkDataTransfer.....	169
5.6.2.1.4	Type: NiddUplinkDataNotification.....	172
5.6.2.1.5	Type: NiddDownlinkDataDeliveryStatusNotification.....	172
5.6.2.1.6	Type: NiddConfigurationStatusNotification.....	173
5.6.2.1.7	Type: NiddConfigurationPatch.....	173
5.6.2.1.8	Type: GmdNiddDownlinkDataDeliveryNotification.....	174
5.6.2.1.9	Type: ManagePort.....	174
5.6.2.1.10	Type: ManagePortNotification.....	175
5.6.2.1.11	Type: NiddDownlinkDataTransferPatch.....	175
5.6.2.2	Referenced structured data types.....	176
5.6.2.2.1	Introduction.....	176
5.6.2.2.2	Type: RdsPort.....	176
5.6.2.2.3	Type: GmdResult.....	177
5.6.2.2.4	Type: NiddDownlinkDataDeliveryFailure.....	177
5.6.2.2.5	Type: RdsDownlinkDataDeliveryFailure.....	177
5.6.2.3	Referenced simple data types and enumerations.....	178
5.6.2.3.1	Introduction.....	178
5.6.2.3.2	Simple data types.....	178
5.6.2.3.3	Enumeration: PdnEstablishmentOptions.....	178
5.6.2.3.4	Enumeration: DeliveryStatus.....	178
5.6.2.3.5	Enumeration: NiddStatus.....	179
5.6.2.3.6	Enumeration: PdnEstablishmentOptionsRm.....	179
5.6.2.3.7	Enumeration: ManageEntity.....	180
5.6.2.3.8	Enumeration: SerializationFormat.....	180
5.6.3	Resource structure.....	180
5.6.3.1	General.....	180
5.6.3.2	Resource: NIDD Configurations.....	181
5.6.3.2.1	Introduction.....	181

5.6.3.2.2	Resource definition.....	182
5.6.3.2.3	Resource methods.....	182
5.6.3.2.3.1	GET.....	182
5.6.3.2.3.2	PUT.....	183
5.6.3.2.3.3	PATCH.....	183
5.6.3.2.3.4	POST.....	183
5.6.3.2.3.5	DELETE.....	183
5.6.3.3	Resource: Individual NIDD Configuration.....	183
5.6.3.3.1	Introduction.....	183
5.6.3.3.2	Resource definition.....	184
5.6.3.3.3	Resource methods.....	184
5.6.3.3.3.1	GET.....	184
5.6.3.3.3.2	PUT.....	185
5.6.3.3.3.3	PATCH.....	185
5.6.3.3.3.4	POST.....	186
5.6.3.3.3.5	DELETE.....	186
5.6.3.4	Resource: NIDD downlink data deliveries.....	186
5.6.3.4.1	Introduction.....	186
5.6.3.4.2	Resource definition.....	187
5.6.3.4.3	Resource methods.....	187
5.6.3.4.3.1	GET.....	187
5.6.3.4.3.2	PUT.....	188
5.6.3.4.3.3	PATCH.....	188
5.6.3.4.3.4	POST.....	188
5.6.3.4.3.5	DELETE.....	190
5.6.3.5	Resource: Individual NIDD downlink data delivery.....	190
5.6.3.5.1	Introduction.....	190
5.6.3.5.2	Resource definition.....	190
5.6.3.5.3	Resource methods.....	190
5.6.3.5.3.1	GET.....	190
5.6.3.5.3.2	PUT.....	191
5.6.3.5.3.3	PATCH.....	192
5.6.3.5.3.4	POST.....	193
5.6.3.5.3.5	DELETE.....	194
5.6.3.6	Void.....	195
5.6.3.7	Void.....	195
5.6.3.8	Void.....	195
5.6.3.9	Resource: Individual ManagePort Configuration.....	195
5.6.3.9.1	Introduction.....	195
5.6.3.9.2	Resource definition.....	195
5.6.3.9.3	Resource methods.....	195
5.6.3.9.3.1	GET.....	195
5.6.3.9.3.2	PUT.....	196
5.6.3.9.3.3	PATCH.....	197
5.6.3.9.3.4	POST.....	197
5.6.3.9.3.5	DELETE.....	197
5.6.3.10	Void.....	198
5.6.3.11	Resource: ManagePort Configurations.....	198
5.6.3.11.1	Introduction.....	198
5.6.3.11.2	Resource definition.....	199
5.6.3.11.3	Resource methods.....	199
5.6.3.11.3.1	GET.....	199
5.6.3.11.3.2	PUT.....	200
5.6.3.11.3.3	PATCH.....	200
5.6.3.11.3.4	POST.....	200
5.6.3.11.3.5	DELETE.....	200
5.6.3A	Notifications.....	200
5.6.3A.1	General.....	200
5.6.3A.2	NIDD Configuration Update Notification.....	200
5.6.3A.2.1	Description.....	200
5.6.3A.2.2	Target URI.....	201
5.6.3A.2.3	Standard Methods.....	201

5.6.3A.2.3.1	Notification via POST.....	201
5.6.3A.2.3.2	Notification via WebSocket.....	202
5.6.3A.3	NIDD Downlink Data Delivery Status Notification .....	202
5.6.3A.3.1	Description .....	202
5.6.3A.3.2	Target URI.....	202
5.6.3A.3.3	Standard Methods.....	202
5.6.3A.3.3.1	Notification via POST.....	202
5.6.3A.3.3.2	Notification via WebSocket.....	204
5.6.3A.4	NIDD Uplink Data Notification.....	204
5.6.3A.4.1	Description .....	204
5.6.3A.4.2	Target URI.....	204
5.6.3A.4.3	Standard Methods.....	204
5.6.3A.4.3.1	Notification via POST.....	204
5.6.3A.4.3.2	Notification via WebSocket.....	205
5.6.3A.5	ManagePort Notification .....	205
5.6.3A.5.1	Description .....	205
5.6.3A.5.2	Target URI.....	205
5.6.3A.5.3	Standard Methods.....	206
5.6.3A.5.3.1	Notification via POST.....	206
5.6.3A.5.3.2	Notification via WebSocket.....	206
5.6.4	Used Features.....	207
5.6.5	Error handling.....	207
5.6.5.1	General .....	207
5.6.5.2	Protocol Errors .....	207
5.6.5.3	Application Errors.....	207
5.7	DeviceTriggering API .....	208
5.7.1	Overview .....	208
5.7.2	Data model.....	208
5.7.2.1	Resource data types.....	208
5.7.2.1.1	Introduction .....	208
5.7.2.1.2	Type: DeviceTriggering .....	209
5.7.2.1.3	Type: DeviceTriggeringDeliveryReportNotification.....	210
5.7.2.1.4	Type: DeviceTriggeringPatch.....	211
5.7.2.2	Referenced simple data types and enumerations.....	211
5.7.2.2.1	Introduction .....	211
5.7.2.2.2	Simple data types.....	211
5.7.2.2.3	Enumeration: DeliveryResult .....	211
5.7.2.2.4	Enumeration: Priority .....	212
5.7.3	Resource structure.....	212
5.7.3.1	General .....	212
5.7.3.2	Resource: Device Triggering Transactions .....	213
5.7.3.2.1	Introduction .....	213
5.7.3.2.2	Resource definition.....	213
5.7.3.2.3	Resource methods.....	213
5.7.3.2.3.1	GET.....	213
5.7.3.2.3.2	PUT.....	214
5.7.3.2.3.3	PATCH .....	214
5.7.3.2.3.4	POST.....	214
5.7.3.2.3.5	DELETE .....	215
5.7.3.3	Resource: Individual Device Triggering Transaction .....	215
5.7.3.3.1	Introduction .....	215
5.7.3.3.2	Resource definition.....	215
5.7.3.3.3	Resource methods.....	215
5.7.3.3.3.1	GET.....	215
5.7.3.3.3.2	PUT.....	216
5.7.3.3.3.3	PATCH .....	217
5.7.3.3.3.4	POST.....	218
5.7.3.3.3.5	DELETE .....	218
5.7.3.4	Void.....	219
5.7.3A	Notifications .....	219
5.7.3A.1	General .....	219
5.7.3A.2	Device Triggering Delivery Report Notification .....	220

5.7.3A.2.1	Description .....	220
5.7.3A.2.2	Target URI.....	220
5.7.3A.2.3	Standard Methods.....	220
5.7.3A.2.3.1	Notification via POST.....	220
5.7.3a.2.3.2	Notification via WebSocket.....	221
5.7.4	Used Features.....	221
5.7.5	Error handling.....	221
5.7.5.1	General.....	221
5.7.5.2	Protocol Errors.....	221
5.7.5.3	Application Errors.....	221
5.8	GMD via MBMS related APIs.....	222
5.8.1	Overview.....	222
5.8.2	GMDviaMBMSbyMB2 API.....	222
5.8.2.1	Data model.....	222
5.8.2.1.1	Resource data types.....	222
5.8.2.1.1.1	Introduction.....	222
5.8.2.1.1.2	Type: TMGIAllocation.....	222
5.8.2.1.1.3	Type: GMDViaMBMSByMb2.....	223
5.8.2.1.1.4	Type: GMDByMb2Notification.....	224
5.8.2.1.1.5	Type: TMGIAllocationPatch.....	224
5.8.2.1.1.6	Type: GMDViaMBMSByMb2Patch.....	224
5.8.2.1.1.7	Type: MbmsLocArea.....	225
5.8.2.2	Resource structure.....	225
5.8.2.2.1	General.....	225
5.8.2.2.2	Resource: TMGI Allocation.....	226
5.8.2.2.2.1	Introduction.....	226
5.8.2.2.2.2	Resource definition.....	226
5.8.2.2.2.3	Resource methods.....	226
5.8.2.2.2.3.1	GET.....	226
5.8.2.2.2.3.2	PUT.....	227
5.8.2.2.2.3.3	PATCH.....	227
5.8.2.2.2.3.4	POST.....	227
5.8.2.2.2.3.5	DELETE.....	228
5.8.2.2.3	Resource: Individual TMGI Allocation.....	228
5.8.2.2.3.1	Introduction.....	228
5.8.2.2.3.2	Resource definition.....	228
5.8.2.2.3.3	Resource methods.....	228
5.8.2.2.3.3.1	GET.....	228
5.8.2.2.3.3.2	PUT.....	229
5.8.2.2.3.3.3	PATCH.....	230
5.8.2.2.3.3.4	POST.....	231
5.8.2.2.3.3.5	DELETE.....	231
5.8.2.2.4	Resource: GMD via MBMS by MB2.....	232
5.8.2.2.4.1	Introduction.....	232
5.8.2.2.4.2	Resource definition.....	232
5.8.2.2.4.3	Resource methods.....	233
5.8.2.2.4.3.1	GET.....	233
5.8.2.2.4.3.2	PUT.....	233
5.8.2.2.4.3.3	PATCH.....	233
5.8.2.2.4.3.4	POST.....	233
5.8.2.2.4.3.5	DELETE.....	234
5.8.2.2.5	Resource: Individual GMD via MBMS by MB2.....	234
5.8.2.2.5.1	Introduction.....	234
5.8.2.2.5.2	Resource definition.....	234
5.8.2.2.5.3	Resource methods.....	234
5.8.2.2.5.3.1	GET.....	234
5.8.2.2.5.3.2	PUT.....	235
5.8.2.2.5.3.3	PATCH.....	236
5.8.2.2.5.3.4	POST.....	237
5.8.2.2.5.3.5	DELETE.....	237
5.8.2.2.6	Void.....	238
5.8.2.2A	Notifications.....	238

5.8.2.2A.1	General .....	238
5.8.2.2A.2	GMD via MBMS by MB2 Notification.....	239
5.8.2.2A.2.1	Description.....	239
5.8.2.2A.2.2	Target URI.....	239
5.8.2.2A.2.3	Standard Methods .....	239
5.8.2.2A.2.3.1	Notification via POST .....	239
5.8.2.2A.2.3.2	Notification via Websocket .....	240
5.8.2.3	Used Features .....	240
5.8.2.4	Error handling .....	240
5.8.2.4.1	General .....	240
5.8.2.4.2	Protocol Errors .....	240
5.8.2.4.3	Application Errors .....	240
5.8.3	GMDviaMBMSbyxMB API.....	241
5.8.3.1	Data model .....	241
5.8.3.1.1	Resource data types .....	241
5.8.3.1.1.1	Introduction.....	241
5.8.3.1.1.2	Type: ServiceCreation .....	241
5.8.3.1.1.3	Type: GMDViaMBMSByxMB .....	242
5.8.3.1.1.4	Type: GMDByxMBNotification.....	243
5.8.3.1.1.5	Type: GMDViaMBMSByxMBPatch .....	243
5.8.3.1.1.6	Type: MbmsLocArea .....	244
5.8.3.1.2	Referenced simple data types and enumerations .....	244
5.8.3.1.2.1	Introduction.....	244
5.8.3.1.2.2	Simple data types .....	244
5.8.3.1.2.3	Enumeration: ServiceAnnouncementMode .....	245
5.8.3.2	Resource structure .....	245
5.8.3.2.1	General .....	245
5.8.3.2.2	Resource: xMB Services .....	246
5.8.3.2.2.1	Introduction.....	246
5.8.3.2.2.2	Resource definition .....	246
5.8.3.2.2.3	Resource methods .....	246
5.8.3.2.2.3.1	GET .....	246
5.8.3.2.2.3.2	PUT .....	247
5.8.3.2.2.3.3	PATCH.....	247
5.8.3.2.2.3.4	POST .....	247
5.8.3.2.2.3.5	DELETE.....	248
5.8.3.2.3	Resource: Individual xMB Service.....	248
5.8.3.2.3.1	Introduction.....	248
5.8.3.2.3.2	Resource definition .....	248
5.8.3.2.3.3	Resource methods .....	248
5.8.3.2.3.3.1	GET .....	248
5.8.3.2.3.3.2	PUT .....	249
5.8.3.2.3.3.3	PATCH.....	249
5.8.3.2.3.3.4	POST .....	249
5.8.3.2.3.3.5	DELETE.....	249
5.8.3.2.4	Resource: GMD via MBMS by xMB .....	250
5.8.3.2.4.1	Introduction.....	250
5.8.3.2.4.2	Resource definition .....	250
5.8.3.2.4.3	Resource methods .....	251
5.8.3.2.4.3.1	GET .....	251
5.8.3.2.4.3.2	PUT .....	251
5.8.3.2.4.3.3	PATCH.....	251
5.8.3.2.4.3.4	POST .....	251
5.8.3.2.4.3.5	DELETE.....	252
5.8.3.2.5	Resource: Individual GMD via MBMS by xMB.....	252
5.8.3.2.5.1	Introduction.....	252
5.8.3.2.5.2	Resource definition .....	252
5.8.3.2.5.3	Resource methods .....	252
5.8.3.2.5.3.1	GET .....	252
5.8.3.2.5.3.2	PUT .....	253
5.8.3.2.5.3.3	PATCH.....	254
5.8.3.2.5.3.4	POST .....	255

5.8.3.2.5.3.5	DELETE.....	255
5.8.3.2.6	Void.....	256
5.8.3.2A	Notifications.....	256
5.8.3.2A.1	General.....	256
5.8.3.2A.2	GMD via MBMS by xMB Notification.....	257
5.8.3.2A.2.1	Description.....	257
5.8.3.2A.2.2	Target URI.....	257
5.8.3.2A.2.3	Standard Methods.....	257
5.8.3.2A.2.3.1	Notification via POST.....	257
5.8.3.2a.2.3.2	Notification via Websocket.....	258
5.8.3.3	Used Features.....	258
5.8.3.4	Error handling.....	258
5.8.3.4.1	General.....	258
5.8.3.4.2	Protocol Errors.....	258
5.8.3.4.3	Application Errors.....	258
5.9	ReportingNetworkStatus API.....	259
5.9.1	Overview.....	259
5.9.2	Data model.....	259
5.9.2.1	Resource data types.....	259
5.9.2.1.1	Introduction.....	259
5.9.2.1.2	Type: NetworkStatusReportingSubscription.....	259
5.9.2.1.3	Type: NetStatusRepSubsPatch.....	260
5.9.2.2	Notification data types.....	261
5.9.2.2.1	Introduction.....	261
5.9.2.2.2	Type: NetworkStatusReportingNotification.....	261
5.9.2.3	Referenced simple data types and enumerations.....	262
5.9.2.3.1	Introduction.....	262
5.9.2.3.2	Simple data types.....	262
5.9.2.3.3	Enumeration: CongestionType.....	262
5.9.3	Resource structure.....	262
5.9.3.1	General.....	262
5.9.3.2	Resource: Network Status Reporting Subscriptions.....	263
5.9.3.2.1	Introduction.....	263
5.9.3.2.2	Resource definition.....	263
5.9.3.2.3	Resource methods.....	263
5.9.3.2.3.1	GET.....	263
5.9.3.2.3.2	PUT.....	264
5.9.3.2.3.3	PATCH.....	264
5.9.3.2.3.4	POST.....	264
5.9.3.2.3.5	DELETE.....	265
5.9.3.3	Resource: Individual Network Status Reporting Subscription.....	265
5.9.3.3.1	Introduction.....	265
5.9.3.3.2	Resource definition.....	265
5.9.3.3.3	Resource methods.....	265
5.9.3.3.3.1	GET.....	265
5.9.3.3.3.2	PUT.....	266
5.9.3.3.3.3	PATCH.....	267
5.9.3.3.3.4	POST.....	268
5.9.3.3.3.5	DELETE.....	268
5.9.3.4	Void.....	269
5.9.3A	Notifications.....	269
5.9.3A.1	General.....	269
5.9.3A.2	Network Status Reporting Notification.....	270
5.9.3A.2.1	Description.....	270
5.9.3A.2.2	Target URI.....	270
5.9.3A.2.3	Standard Methods.....	270
5.9.3A.2.3.1	Notification via POST.....	270
5.9.3A.2.3.2	Notification via Websocket.....	271
5.9.4	Used Features.....	271
5.9.5	Error handling.....	271
5.9.5.1	General.....	271
5.9.5.2	Protocol Errors.....	271

5.9.5.3	Application Errors .....	271
5.10	CpProvisioning API .....	272
5.10.1	Overview .....	272
5.10.2	Data model .....	272
5.10.2.1	Resource data types .....	272
5.10.2.1.1	Introduction .....	272
5.10.2.1.2	Type: CpInfo .....	273
5.10.2.2	Referenced structured data types .....	276
5.10.2.2.1	Introduction .....	276
5.10.2.2.2	Type: CpParameterSet .....	276
5.10.2.2.3	Type: ScheduledCommunicationTime .....	279
5.10.2.2.4	Type: CpReport .....	279
5.10.2.2.5	Type: UmtLocationArea5G .....	279
5.10.2.2.6	Type: AppExpUeBehaviour .....	281
5.10.2.3	Referenced simple data types and enumerations .....	283
5.10.2.3.1	Introduction .....	283
5.10.2.3.2	Simple data types .....	283
5.10.2.3.3	Enumeration: CommunicationIndicator .....	283
5.10.2.3.4	Enumeration: StationaryIndication .....	283
5.10.2.3.5	Enumeration: CpFailureCode .....	283
5.10.2.3.6	Enumeration: BatteryIndication .....	284
5.10.2.3.7	Enumeration: TrafficProfile .....	284
5.10.2.3.8A	Enumeration: ScheduledCommunicationType .....	284
5.10.3	Resource structure .....	285
5.10.3.1	General .....	285
5.10.3.2	Resource: CP Provisioning Subscriptions .....	285
5.10.3.2.1	Introduction .....	285
5.10.3.2.2	Resource definition .....	286
5.10.3.2.3	Resource methods .....	286
5.10.3.2.3.1	GET .....	286
5.10.3.2.3.2	PUT .....	287
5.10.3.2.3.3	PATCH .....	287
5.10.3.2.3.4	POST .....	287
5.10.3.2.3.5	DELETE .....	287
5.10.3.3	Resource: Individual CP Provisioning Subscription .....	288
5.10.3.3.1	Introduction .....	288
5.10.3.3.2	Resource definition .....	288
5.10.3.3.3	Resource methods .....	288
5.10.3.3.3.1	GET .....	288
5.10.3.3.3.2	PUT .....	289
5.10.3.3.3.3	PATCH .....	290
5.10.3.3.3.4	POST .....	290
5.10.3.3.3.5	DELETE .....	290
5.10.3.4	Resource: Individual CP Set Provisioning .....	291
5.10.3.4.1	Introduction .....	291
5.10.3.4.2	Resource definition .....	291
5.10.3.4.3	Resource methods .....	291
5.10.3.4.3.1	GET .....	291
5.10.3.4.3.2	PUT .....	292
5.10.3.4.3.3	PATCH .....	293
5.10.3.4.3.4	POST .....	293
5.10.3.4.3.5	DELETE .....	293
5.10.4	Used Features .....	294
5.10.5	Error handling .....	294
5.10.5.1	General .....	294
5.10.5.2	Protocol Errors .....	294
5.10.5.3	Application Errors .....	294
5.11	PfdManagement API .....	295
5.11.1	Overview .....	295
5.11.2	Data model .....	295
5.11.2.1	Resource data types .....	295
5.11.2.1.1	Introduction .....	295

5.11.2.1.2	Type: PfdManagement .....	296
5.11.2.1.3	Type: PfdData.....	297
5.11.2.1.4	Type: Pfd.....	297
5.11.2.1.5	Type: PfdReport .....	298
5.11.2.1.6	Type: UserPlaneLocationArea .....	298
5.11.2.1.7	Type: PfdManagementPatch.....	299
5.11.2.2	Referenced simple data types and enumerations.....	299
5.11.2.2.1	Introduction .....	299
5.11.2.2.2	Simple data types.....	299
5.11.2.2.3	Enumeration: FailureCode.....	300
5.11.2.2.4	Enumeration: DomainNameProtocol.....	300
5.11.3	Resource structure.....	300
5.11.3.1	General .....	300
5.11.3.2	Resource: PFD Management Transactions .....	301
5.11.3.2.1	Introduction .....	301
5.11.3.2.2	Resource definition.....	301
5.11.3.2.3	Resource methods.....	302
5.11.3.2.3.1	GET.....	302
5.11.3.2.3.2	PUT.....	302
5.11.3.2.3.3	POST.....	303
5.11.3.2.3.4	PATCH .....	303
5.11.3.2.3.5	DELETE .....	303
5.11.3.3	Resource: Individual PFD Management Transaction.....	304
5.11.3.3.1	Introduction .....	304
5.11.3.3.2	Resource definition.....	304
5.11.3.3.3	Resource methods.....	304
5.11.3.3.3.1	GET.....	304
5.11.3.3.3.2	PUT.....	305
5.11.3.3.3.3	PATCH .....	306
5.11.3.3.3.4	POST.....	307
5.11.3.3.3.5	DELETE .....	307
5.11.3.4	Resource: Individual Application PFD Management.....	308
5.11.3.4.1	Introduction .....	308
5.11.3.4.2	Resource definition.....	308
5.11.3.4.3	Resource methods.....	309
5.11.3.4.3.1	GET.....	309
5.11.3.4.3.2	PUT.....	309
5.11.3.4.3.3	PATCH .....	310
5.11.3.4.3.4	POST.....	311
5.11.3.4.3.5	DELETE .....	311
5.11.3.5	Void.....	312
5.11.3A	Notifications .....	312
5.11.3A.1	General .....	312
5.11.3A.2	PFD Management Notification .....	313
5.11.3A.2.1	Description .....	313
5.11.3A.2.2	Target URI.....	313
5.11.3A.2.3	Standard Methods .....	313
5.11.3A.2.3.1	Notification via POST.....	313
5.11.3A.2.3.2	Notification via Websocket.....	314
5.11.4	Used Features.....	314
5.11.5	Error handling.....	314
5.11.5.1	General .....	314
5.11.5.2	Protocol Errors .....	314
5.11.5.3	Application Errors.....	314
5.12	ECRControl API .....	315
5.12.1	Overview .....	315
5.12.2	Data model.....	315
5.12.2.1	Data types.....	315
5.12.2.1.1	Introduction .....	315
5.12.2.1.2	Type: ECRControl.....	315
5.12.2.1.3	Type: ECRData .....	316
5.12.2.1.4	Type: PlmnEcRestrictionDataWb .....	317



5.12.3	Custom Operations without associated resources .....	317
5.12.3.1	Overview .....	317
5.12.3.2	Operation: query .....	317
5.12.3.2.1	Description .....	317
5.12.3.2.2	Operation Definition .....	317
5.12.3.3	Operation: configure .....	318
5.12.3.3.1	Description .....	318
5.12.3.3.2	Operation Definition .....	319
5.12.4	Used Features .....	319
5.12.5	Error handling .....	320
5.12.5.1	General .....	320
5.12.5.2	Protocol Errors .....	320
5.12.5.3	Application Errors .....	320
5.13	NpConfiguration API .....	320
5.13.1	Overview .....	320
5.13.2	Data model .....	320
5.13.2.1	Resource data types .....	320
5.13.2.1.1	Introduction .....	320
5.13.2.1.2	Type: NpConfiguration .....	321
5.13.2.1.3	Type: NpConfigurationPatch .....	324
5.13.2.1.4	Type: ConfigurationNotification .....	324
5.13.3	Resource structure .....	325
5.13.3.1	General .....	325
5.13.3.2	Resource: NP Configurations .....	325
5.13.3.2.1	Introduction .....	325
5.13.3.2.2	Resource definition .....	325
5.13.3.2.3	Resource methods .....	325
5.13.3.2.3.1	GET .....	325
5.13.3.2.3.2	PUT .....	326
5.13.3.2.3.3	PATCH .....	326
5.13.3.2.3.4	POST .....	326
5.13.3.2.3.5	DELETE .....	327
5.13.3.3	Resource: Individual NP Configuration .....	327
5.13.3.3.1	Introduction .....	327
5.13.3.3.2	Resource definition .....	327
5.13.3.3.3	Resource methods .....	328
5.13.3.3.3.1	GET .....	328
5.13.3.3.3.2	PUT .....	328
5.13.3.3.3.3	PATCH .....	329
5.13.3.3.3.4	POST .....	330
5.13.3.3.3.5	DELETE .....	330
5.13.3.4	Void .....	331
5.13.3A	Notifications .....	331
5.13.3A.1	General .....	331
5.13.3A.2	Configuration Notification .....	332
5.13.3A.2.1	Description .....	332
5.13.3A.2.2	Target URI .....	332
5.13.3A.2.3	Standard Methods .....	332
5.13.3A.2.3.1	Notification via POST .....	332
5.13.3A.2.3.2	Notification via WebSocket .....	333
5.13.4	Used Features .....	333
5.13.5	Error handling .....	334
5.13.5.1	General .....	334
5.13.5.2	Protocol Errors .....	334
5.13.5.3	Application Errors .....	334
5.14	AsSessionWithQoS API .....	334
5.14.1	Overview .....	334
5.14.2	Data model .....	334
5.14.2.1	Resource data types .....	334
5.14.2.1.1	Introduction .....	334
5.14.2.1.2	Type: AsSessionWithQoSSubscription .....	339
5.14.2.1.3	Type: AsSessionWithQoSSubscriptionPatch .....	345

5.14.2.1.4	Type: UserPlaneNotificationData.....	349
5.14.2.1.5	Type: UserPlaneEventReport .....	350
5.14.2.1.6	Type: QosMonitoringInformation .....	354
5.14.2.1.7	Type: QosMonitoringInformationRm .....	357
5.14.2.1.8	Type: QosMonitoringReport .....	361
5.14.2.1.9	Type: TscQosRequirement .....	362
5.14.2.1.10	Type: TscQosRequirementRm .....	362
5.14.2.1.11	Type AdditionInfoAsSessionWithQos .....	363
5.14.2.1.12	Type: ProblemDetailsAsSessionWithQos .....	363
5.14.2.1.13	Type AsSessionMediaComponent.....	363
5.14.2.1.14	Type AsSessionMediaComponentRm.....	366
5.14.2.1.15	Type: MultiModalFlows.....	369
5.14.2.1.16	Type: UeAddInfo.....	369
5.14.2.2	Referenced simple data types and enumerations.....	370
5.14.2.2.1	Introduction .....	370
5.14.2.2.2	Simple data types.....	370
5.14.2.2.3	Enumeration: UserPlaneEvent.....	370
5.14.3	Resource structure.....	371
5.14.3.1	General .....	371
5.14.3.2	Resource: AS Session with Required QoS subscriptions.....	372
5.14.3.2.1	Introduction .....	372
5.14.3.2.2	Resource definition.....	372
5.14.3.2.3	Resource methods.....	372
5.14.3.2.3.1	GET.....	372
5.14.3.2.3.2	PUT.....	373
5.14.3.2.3.3	PATCH .....	374
5.14.3.2.3.4	POST.....	374
5.14.3.2.3.5	DELETE .....	374
5.14.3.3	Resource: Individual AS Session with Required QoS Subscription .....	375
5.14.3.3.1	Introduction .....	375
5.14.3.3.2	Resource definition.....	375
5.14.3.3.3	Resource methods.....	375
5.14.3.3.3.1	GET.....	375
5.14.3.3.3.2	PUT.....	376
5.14.3.3.3.3	PATCH .....	377
5.14.3.3.3.4	POST.....	378
5.14.3.3.3.5	DELETE .....	378
5.14.3.4	Void.....	379
5.14.3A	Notifications .....	379
5.14.3A.1	General.....	379
5.14.3A.2	Event Notification .....	379
5.14.3A.2.1	Description .....	379
5.14.3A.2.2	Target URI.....	379
5.14.3A.2.3	Standard Methods.....	379
5.14.3A.2.3.1	Notification via POST.....	379
5.14.3A.2.3.2	Notification via Websocket.....	380
5.14.4	Used Features.....	380
5.14.5	Error handling .....	383
5.14.5.1	General .....	383
5.14.5.2	Protocol Errors .....	383
5.14.5.3	Application Errors.....	383
5.15	MsisdnLessMoSms API.....	384
5.15.1	Overview .....	384
5.15.2	Data model.....	384
5.15.2.1	Notification data types .....	384
5.15.2.1.1	Introduction .....	384
5.15.2.1.2	Type: MsisdnLessMoSmsNotification .....	384
5.15.2.1.3	Type: MsisdnLessMoSmsNotificationReply.....	385
5.15.3	Resource structure.....	385
5.15.3.1	General .....	385
5.15.3.2	MSISDN-less MO SMS Notification.....	385
5.15.3.2.1	Introduction .....	385

5.15.3.2.2	Resource definition.....	386
5.15.3.2.3	Standard methods .....	386
5.15.3.2.3.1	Notification via POST.....	386
5.15.4	Used Features.....	387
5.15.5	Error handling.....	387
5.15.5.1	General .....	387
5.15.5.2	Protocol Errors .....	387
5.15.5.3	Application Errors.....	387
5.16	RacsParameterProvisioning API .....	387
5.16.1	Overview .....	387
5.16.2	Data model.....	388
5.16.2.1	Resource data types.....	388
5.16.2.1.1	Introduction .....	388
5.16.2.1.2	Type: RacsProvisioningData .....	388
5.16.2.1.3	Type: RacsFailureReport.....	389
5.16.2.1.4	Type: RacsConfiguration.....	389
5.16.2.1.5	Type: RacsProvisioningDataPatch .....	390
5.16.2.1.6	Type: RacsConfigurationRm.....	390
5.16.2.2	Referenced simple data types and enumerations.....	391
5.16.2.2.1	Introduction .....	391
5.16.2.2.2	Simple data types.....	391
5.16.2.2.3	Enumeration: RacsFailureCode.....	391
5.16.3	Resource structure.....	391
5.16.3.1	General .....	391
5.16.3.2	Resource: RACS Parameter Provisionings .....	392
5.16.3.2.1	Introduction .....	392
5.16.3.2.2	Resource definition.....	392
5.16.3.2.3	Resource methods.....	392
5.16.3.2.3.1	GET.....	392
5.16.3.2.3.2	PUT.....	393
5.16.3.2.3.3	PATCH.....	393
5.16.3.2.3.4	POST.....	393
5.16.3.2.3.5	DELETE .....	394
5.16.3.3	Resource: Individual RACS Parameter Provisioning.....	394
5.16.3.3.1	Introduction .....	394
5.16.3.3.2	Resource definition.....	394
5.16.3.3.3	Resource methods.....	394
5.16.3.3.3.1	GET.....	394
5.16.3.3.3.2	PATCH.....	395
5.16.3.3.3.3	PUT.....	396
5.16.3.3.3.4	POST.....	397
5.16.3.3.3.5	DELETE .....	397
5.16.4	Used Features.....	398
5.16.5	Error handling.....	398
5.16.5.1	General .....	398
5.16.5.2	Protocol Errors .....	398
5.16.5.3	Application Errors.....	398
6	Security.....	399
7	Using Common API Framework.....	399
7.1	General .....	399
7.2	Security .....	399
<b>Annex A (normative):</b>	<b>OpenAPI representation for the APIs defined in the present document .....</b>	<b>401</b>
A.1	General .....	401
A.2	Data Types applicable to several APIs.....	401
A.3	MonitoringEvent API.....	410
A.4	ResourceManagementOfBdt API.....	428

A.5	ChargeableParty API.....	434
A.6	NIDD API .....	440
A.7	DeviceTriggering API.....	457
A.8	GMDViaMBMS APIs.....	464
A.8.1	GMDviaMBMSbyMB2 API.....	464
A.8.2	GMDviaMBMSbyxMB API.....	475
A.9	ReportingNetworkStatus API.....	485
A.10	CpProvisioning API .....	491
A.11	PfdManagement API.....	502
A.12	ECRControl API .....	513
A.13	NpConfiguration API.....	515
A.14	AsSessionWithQoS API.....	522
A.15	MsisdnLessMoSms API.....	538
A.16	RacsParameterProvisioning API.....	540
<b>Annex B (informative):</b>	<b>TS Skeleton Template.....</b>	<b>547</b>
<b>Annex C (informative):</b>	<b>Change history .....</b>	<b>548</b>
History .....		560

---

# Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

x the first digit:

- 1 presented to TSG for information;
- 2 presented to TSG for approval;
- 3 or greater indicates TSG approved document under change control.

Y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.

z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present specification describes the protocol for the T8 reference point between the SCEF and the SCS/AS. The T8 reference point and the related stage 2 functional requirements are defined in 3GPP TS 23.682 [2].

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.682: "Architecture enhancements to facilitate communications with packet data networks and applications".
- [3] 3GPP TS 23.032: "Universal Geographical Area Description (GAD)".
- [4] Void.
- [5] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [6] Hypertext Transfer Protocol (HTTP) Status Code Registry at IANA, <http://www.iana.org/assignments/http-status-codes>.
- [7] IETF RFC 3986: "Uniform Resource Identifier (URI): Generic Syntax".
- [8] IETF RFC 9457: "Problem Details for HTTP APIs".
- [9] 3GPP TS 29.154: "Service capability exposure functionality over Nt reference point".
- [10] 3GPP TS 29.214: "Policy and Charging Control over Rx reference point".
- [11] 3GPP TS 29.336: "Home Subscriber Server (HSS) diameter interfaces for interworking with packet data networks and applications".
- [12] 3GPP TS 29.128: "Mobility Management Entity (MME) and Serving GPRS Support Node (SGSN) interfaces for interworking with packet data networks and applications".
- [13] 3GPP TS 29.201: "Representational State Transfer (REST) reference point between Application Function (AF) and Protocol Converter (PC)".
- [14] 3GPP TS 23.003: "Numbering, addressing and identification".
- [15] IETF RFC 3339: "Date and Time on the Internet: Timestamps".
- [16] IETF RFC 9112: "HTTP/1.1".
- [17] IETF RFC 9110: "HTTP Semantics".
- [18] Void.
- [19] Void.
- [20] IETF RFC 9111: "HTTP Caching".

- [21] Void.
- [22] IETF RFC 9113: "HTTP/2".
- [23] 3GPP TS 29.155: "Traffic steering control; Representational state transfer (REST) over St reference point".
- [24] 3GPP TS 29.368: "Tsp interface protocol between the MTC Interworking Function (MTC-IWF) and Service Capability Server (SCS)".
- [25] 3GPP TS 29.337: "Diameter-based T4 interface for communications with packet data networks and applications".
- [26] 3GPP TS 29.250: "Nu reference point between SCEF and PFDF for sponsored data connectivity".
- [27] Open API: "OpenAPI Specification Version 3.0.0", <https://spec.openapis.org/oas/v3.0.0>.
- [28] IETF RFC 1166: "Internet Numbers".
- [29] IETF RFC 5952: "A recommendation for Ipv6 address text representation".
- [30] 3GPP TS 29.153: "Service capability exposure functionality over Ns reference point".
- [31] 3GPP TS 24.250: "Protocol for Reliable Data Service; Stage 3".
- [32] IETF RFC 6455: "The WebSocket Protocol".
- [33] 3GPP TS 29.272: "Mobility Management Entity (MME) and Serving GPRS Support Node (SGSN) related interfaces based on Diameter protocol".
- [34] 3GPP TS 29.338: "Diameter based protocols to support Short Message Service (SMS) capable Mobile Management Entities (MMEs)".
- [35] 3GPP TS 33.187: "Security aspects of Machine-Type Communications (MTC) and other mobile data applications communications enhancements".
- [36] 3GPP TS 29.468: "Group Communication System Enablers for LTE (GCSE\_LTE);MB2 Reference Point;Stage 3".
- [37] 3GPP TS 29.116: "Presentational state transfer over xMB reference point between Content Provider and BM-SC".
- [38] IETF RFC 5789: "PATCH method for HTTP".
- [39] IETF RFC 7396: "JSON Merge Patch".
- [40] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [41] YAML (10/2009): "YAML Ain't Markup Language (YAML™) Version 1.2", <http://www.yaml.org/spec/1.2/spec.html>.
- [42] 3GPP TS 29.572: "5G System; Location Management Services; Stage 3".
- [43] 3GPP TS 23.040: "Technical realization of the Short Message Service (SMS)".
- [44] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [45] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces Stage 3".
- [46] IETF RFC 6733: "Diameter Base Protocol".
- [47] 3GPP TS 23.222: "Common API Framework for 3GPP Northbound APIs; Stage 2".
- [48] 3GPP TS 29.222: "Common API Framework for 3GPP Northbound APIs; Stage 3".
- [49] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [50] 3GPP TS 29.554: "5G System; Background Data Transfer Policy Control Service; Stage 3".

- [51] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [52] 3GPP TS 29.514: "5G System; Policy Authorization Service; Stage 3".
- [53] 3GPP TS 33.122: "Security Aspects of Common API Framework for 3GPP Northbound APIs".
- [54] 3GPP TS 38.413: "NG-RAN; NG Application Protocol (NGAP)".
- [55] 3GPP TS 23.468: "Group Communication System Enablers for LTE (GCSE\_LTE); stage 2".
- [56] 3GPP TS 26.348, "Northbound Application Programming Interface (API) for Multimedia Broadcast/Multicast Service (MBMS) at the xMB reference point".
- [57] 3GPP TS 29.508: "5G System; Session Management Event Exposure Service; Stage 3".
- [58] 3GPP TR 21.900: "Technical Specification Group working methods".
- [59] 3GPP TS 36.331: "Evolved Universal Terrestrial Radio Access (E-UTRA) Radio Resource Control (RRC); Protocol Specification".
- [60] 3GPP TS 38.331: "NR; Radio Resource Control (RRC) protocol specification".
- [61] 3GPP TS 29.675: "User Equipment (UE) radio capability provisioning service; Stage 3".
- [62] 3GPP TS 29.522: "5G System; Network Exposure Function Northbound APIs; Stage 3".
- [63] 3GPP TS 29.503: "5G System; Unified Data Management Services; Stage 3".
- [64] 3GPP TS 24.526: "User Equipment (UE) policies for 5G System (5GS); Stage 3".
- [65] 3GPP TS 29.515: "5G System; Gateway Mobile Location Services; Stage 3".
- [66] IETF RFC 5322: "Internet Message Format".
- [67] IETF RFC 6902: "JavaScript Object Notation (JSON) Patch".
- [68] 3GPP TS 33.558: "Security aspects of enhancement of support for enabling edge applications; Stage 2".
- [69] IETF RFC 5234: "Augmented BNF for Syntax Specifications: ABNF".
- [70] 3GPP TS 29.523: "5G System; Policy Control Event Exposure Service; Stage 3".
- [71] IETF RFC 6901: "JavaScript Object Notation (JSON) Pointer".
- [72] 3GPP TS 29.565: "5G System; Time Sensitive Communication and Time Synchronization Function Services; Stage 3".
- [73] 3GPP TS 29.520: "5G System; Network Data Analytics Services; Stage 3".

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].



## 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

AF	Application Function
AI/ML	Artificial Intelligence/Machine Learning
AS	Application Server
ASP	Application Service Provider
BAT	Burst Arrival Time
BDT	Background Data Transfer
CAPIF	Common API Framework
CP	Communication Pattern
DDN	Downlink Data Notification
DNN	Data Network Name
DL	Downlink
eNB	Evolved Node B
GMD	Group Message Delivery
IMEI-TAC	Type Allocation Code part of an IMEI
IWK-SCEF	Interworking SCEF
JSON	JavaScript Object Notation
LC	Load Control
LCI	Load Control Information
MIME	Multipurpose Internet Mail Extensions
MT	Mobile Terminated
MTC	Machine Type Communications
MT-LR	Mobile Terminated Location Request
NEF	Network Exposure Function
NIDD	Non-IP Data Delivery
NP	Network Parameter
NSAC	Network Slice Admission Control
OCI	Overload Control Information
OLC	OverLoad Control
PCRF	Policy and Charging Rule Function
PDN	Packet Data Network
PDV	Packet Delay Variation
PFD	Packet Flow Description
PFDf	Packet Flow Description Function
RCAF	RAN Congestion Awareness Function
REST	Representational State Transfer
SACH	Service Announcement Channel
SCEF	Service Capability Exposure Function
SCS	Services Capability Server
S-NSSAI	Single Network Slice Selection Assistance Information
TAI	Tracking Area Identity
TLTRI	T8 Long Term Transaction Reference ID
TSC	Time Sensitive Communication
TSCAI	Time Sensitive Communication Assistance Information
WB	Wide Band
YAML	YAML Ain't Markup Language

---

## 4 T8 reference point

### 4.1 Overview

The T8 reference point is between the SCS/AS and the SCEF. It specifies APIs that allow the SCS/AS to access the services and capabilities provided by 3GPP network entities and securely exposed by the SCEF.

This document also specifies the procedures triggered at the SCEF by API requests from the SCS/AS and by event notifications received from 3GPP network entities.

The stage 2 level requirements and signalling flows for the T8 reference point are defined in 3GPP TS 23.682 [2].


The T8 reference point supports the following procedures:

- Monitoring Procedures
- Procedures for resource management of Background Data Transfer
- Procedures for changing the chargeable party
- Procedures for Non-IP Data Delivery
- Procedures for Device Triggering
- Procedures for Group Message Delivery
- Procedures for Reporting of Network Status
- Procedures for Communication Pattern Parameters Provisioning
- Procedures for PFD Management
- Procedures for Enhanced Coverage Restriction Control
- Procedures for Network Parameter Configuration
- Procedures for setting up an AS session with required QoS
- Procedures for MSISDN-less Mobile Originated SMS
- Procedures for RACS Parameter Provisioning

## 4.2 Reference model

The T8 reference point resides between the SCEF and the SCS/AS as depicted in figure 4.2.1. The overall SCEF architecture is depicted in clause 4.2 of 3GPP TS 23.682 [2].

NOTE: The SCS/AS can be provided by a third party.

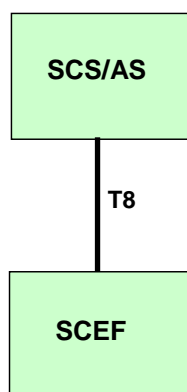

**Figure 4.2.1: T8 reference model**

## 4.3 Functional elements

### 4.3.1 SCEF

The SCEF is a functional element which provides means to securely expose the services and capabilities provided by 3GPP network interfaces. The SCEF provides access to network capabilities through homogenous application programming interfaces.

Individual instances of SCEF may vary depending on what service capabilities are exposed and what API features are supported.

The SCEF shall protect the other PLMN entities (e.g. HSS, MME) from requests exceeding the permission arranged in the SLA with the third-party service provider.

When needed, the SCEF supports mapping between information exchanged with SCS/AS (e.g. geographical identifiers) and information exchanged with internal PLMN functions (e.g. cell-Id, eNB-Id, TAI, MBMS SAI, etc.). This mapping is assumed to be provided by the SCEF based on local configuration data.

### 4.3.2 SCS/AS

The SCS is the entity which connects MTC application servers to the 3GPP network to enable them to communicate through specific 3GPP defined services with UEs used for MTC and with the SCEF in the HPLMN. The SCS offers capabilities for use by one or multiple MTC application servers. The MTC applications in the external network are hosted on one or more ASs.

An SCS/AS can get services from multiple SCEFs, and an SCEF can provide services to multiple SCS/ASs.

The SCS is controlled by the operator of the HPLMN or by a MTC Service Provider.

The AS can be controlled by a 3<sup>rd</sup> party.

## 4.4 Procedures over T8 reference point

### 4.4.1 Introduction

All procedures that operate across the T8 reference point, as specified in 3GPP TS 23.682 [2], are specified in the following clauses.

### 4.4.2 Monitoring Procedures

#### 4.4.2.1 General

These procedures are used to perform event monitoring functions via the T8 interface, which include:

- Monitoring event configuration as specified in clause 4.4.2.2;
- Reporting of monitoring event as specified in clause 4.4.2.3;
- Network initiated notifications of monitoring event cancellation, as specified in clause 4.4.2.4 ; and
- Network initiated notifications of applied parameter configuration, as specified in clause 4.4.2.5.

#### 4.4.2.2 Monitoring Events Configuration

##### 4.4.2.2.1 General

In order to subscribe to a new monitoring event configuration, the SCS/AS shall send an HTTP POST request message to the SCEF targeting the "Monitoring Event Subscriptions" resource. The body of the HTTP POST request message shall include:

- the SCS/AS Identifier;
- the Monitoring Type;
- the Notification Destination Address; and
- the identifier(s) of the targeted UE(s), i.e. one of External Identifier, MSISDN or External Group Identifier. The External Identifier or the MSISDN identifies the subscription of an individual UE and the External Group Identifier points to a group of UEs.

and may include:

- the Maximum Number of Reports;
- the Monitoring Duration indicated by the property "monitorExpireTime";
- the Group Reporting Guard Time; and
- additional Monitoring Type(s), if the subscription request targets multiple event(s).

If the Subscription\_modification feature is supported, the SCS/AS may send an HTTP PUT message in order to update an existing monitoring event subscription. The HTTP PUT request targets the resource "Individual Monitoring Event Subscription" replacing all the properties in the existing configuration. The identifier(s) of the targeted UE(s) (i.e. "msisdn", "externalId" or "externalGroupId" attribute), the identifier of the MTC Provider (i.e. "mtcProviderId" attribute) and the supported features (i.e. "supportedFeatures" attribute) provided during the creation of the monitoring event subscription shall not be updated. Also, both the "requestTestNotification" and "websocketNotifConfig" attributes shall not be updated, if previously provided.

For one-time monitoring type of requests, the SCS/AS shall include the Maximum Number of Reports with a value set to 1 and not include the Monitoring Duration in the HTTP request message sent to the SCEF.

If the Subscription\_Patch feature is supported, the SCS/AS may send an HTTP PATCH request to request the modification of an existing "Individual Monitoring Event Subscription" resource, with the request body including the modification instructions which may include any applicable attributes (e.g. "notificationDestination", "monitorExpireTime"), except the provided UE Identifier (e.g. "msisdn", "externalId" or "externalGroupId"), "mtcProviderId" and "supportedFeatures" attributes. Also, both the "requestTestNotification" and "websocketNotifConfig" attributes shall not be modified, if previously provided.

For a group of UEs, if the Partial\_group\_modification feature is supported, the SCS/AS may send an HTTP PATCH request message in order to cancel or add certain UE(s) within an active group. The HTTP PATCH request targets the resource "Individual Monitoring Event Subscription" updates with the corresponding "excludedExternalIds" and/or "excludedMsisdns" attributes in the existing configuration for partial group cancellation, and/or updates with the corresponding "addedExternalIds" and/or "addedMsisdns" attributes in the existing configuration for partial group addition.

Upon reception of the HTTP POST, PUT or PATCH request message, if the SCS/AS is authorized to perform such request, the SCEF shall check whether the parameters (e.g. Maximum Number of Reports, Monitoring Duration, Maximum Latency, Maximum Response Time, suggested number of downlink packets in the HTTP POST or PUT request message) in the HTTP request body are within the range defined by operator policies. If one or more of these parameters are not within the range, the SCEF shall either:

- reject the request message by sending an HTTP response to the SCS/AS with a status code set to "403 Forbidden" and may include in the response body the "PARAMETER\_OUT\_OF\_RANGE" application error within the "cause" attribute of the ProblemDetails data structure and indicate which parameters are out of the range within the "invalidParams" attribute of the "ProblemDetails" data structure; or
- modify the parameters which are not within the range by selecting different values which are within the range.

For individual UE configuration requests, the SCEF shall also check whether the Idle Status Indication is included for the UE reachability event. If the Idle Status Indication is received in the request but not supported by the network, the SCEF may reject the request message by sending an HTTP response to the SCS/AS with a status code set to "403 Forbidden" and may include in the response body the "IDLE\_STATUS\_UNSUPPORTED" error within the "cause" attribute of the "ProblemDetails" structure.

If the SCEF receives an HTTP POST request to create a subscription resource for a monitoring event, but without an indication of the support for the feature corresponding to the requested monitoring event, the SCEF shall reject the request by sending an HTTP "400 Bad Request" HTTP error response including the "EVENT\_FEATURE\_MISMATCH" application error within the "cause" attribute of the "ProblemDetails" structure.

If the SCEF receives an HTTP POST request to create a subscription resource for a monitoring event that it does not support, the SCEF shall reject the request by sending an HTTP "500 Internal Server Error" HTTP error response including the "EVENT\_UNSUPPORTED" application error within the "cause" attribute of the "ProblemDetails" structure.

If the "enNB" feature is supported:

- if the SCEF receives an HTTP POST request to create a subscription resource for a monitoring event and determines that no more subscriptions are allowed for this client, the SCEF shall reject the request by sending an HTTP "403 Forbidden" error response including the "RESOURCES\_EXCEEDED" application error within the "cause" attribute of the "ProblemDetails" structure; and
- if the SCEF receives an HTTP POST request to create a subscription resource for a monitoring event and determines that a duplicate subscription already exists for this client, the SCEF shall reject the request by sending an HTTP "400 Bad Request" error response including the "DUPLICATE\_REQUEST" application error within the "cause" attribute of the "ProblemDetails" structure.

After validation, the SCEF shall store the parameters and:

- may assign a SCEF Reference ID related to the created monitoring event subscription resource; and
- based on operator policies, shall:
  - map the accuracy into permissible granularity for the location reporting event; and
  - map the location area into a list of cells, eNodeB(s) and/or RAI(s)/TAI(s) and derive the corresponding MME(s)/SGSN(s), for number of UEs present in a geographic area event.

In order to delete a previously active configured monitoring event subscription at the SCEF, the SCS/AS shall send an HTTP DELETE request message to the SCEF targeting the "Individual Monitoring Event Subscription" resource using the corresponding resource URI previously received in the response to the request that has created the monitoring events subscription resource. The SCEF shall then determine the SCEF Reference ID related to the active monitoring subscription resource, and if the SCS/AS is authorized to perform such request, the SCEF shall delete the targeted resource.

#### 4.4.2.2.2 Monitoring Events Configuration via HSS

##### 4.4.2.2.2.1 General

The following monitoring events are applicable for the monitoring event configuration via HSS for an individual UE or a group of UEs:

- Loss of connectivity;
- UE reachability;
- Location Reporting;
- Change of IMSI-IMEI(SV) Association;
- Roaming Status;
- Communication Failure;
- PDN connectivity status;
- Availability after DDN Failure; and
- API support capability.

Only one-time reporting is supported if the "reachabilityType" attribute sets to "SMS" for the event "UE reachability" or if the "locationType" attribute sets to "LAST\_KNOWN\_LOCATION" for the event "Location Reporting" in the monitoring event request.

#### 4.4.2.2.2 Configuration Request for an individual UE

Upon receipt of a configuration request from the SCS/AS for an individual UE, the SCEF shall interact with the HSS via S6t, as specified in 3GPP TS 29.336 [11].

Upon receipt of a successful response from the HSS,

- if it is a one-time monitoring request and the monitoring event report is received, the SCEF shall delete the associated configuration, send an HTTP response message to the SCS/AS with a "200 OK" status code and including the received monitoring event report(s) (more than one report may be provided if the "enNB" is supported).
- otherwise, the SCEF shall,
  - for an HTTP POST request, create a new "Individual Monitoring Event Subscription" resource addressed by the URI that contains the SCS/AS identifier and an SCEF-created subscription identifier, and send an HTTP response to the SCS/AS with a "201 Created" status code, containing the final suggested configuration parameter(s) (if modified), indication(s) of the discarded parameter(s) (if discarded), the monitoring event report(s) (more than one report may be provided if the "enNB" is supported), if received, and a location header field containing the URI of the created resource.
  - for an HTTP PUT request, update the active "Individual Monitoring Event Subscription" resource addressed by the request URI and send an HTTP response to the SCS/AS with a "200 OK" status code, containing the final suggested configuration parameter(s) (if modified), indication(s) of the discarded parameter(s) (if discarded) and the monitoring event report(s) (more than one report may be provided if the "enNB" is supported), if received, or a "204 No Content" status code.
  - for an HTTP DELETE request, delete the active "Individual Monitoring Event Subscription" resource addressed by the request URI and send an HTTP response to the SCS/AS with a "204 No Content" status code, or a "200 OK" status code and including the monitoring event report(s) (more than one report may be provided if the "enNB" is supported), if received.

If the SCEF receives a response with an error code from the HSS, the SCEF shall not create, update nor delete the concerned resource and respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

#### 4.4.2.2.3 Configuration Request for a group of UEs

Upon receipt of a request from the SCS/AS including an External Group Identifier, then the monitoring configuration is for a group of UEs. The SCEF shall interact with the HSS via S6t as specified in 3GPP TS 29.336 [11].

Upon receipt of a successful response from the HSS indicating that group processing is in progress and before beginning the processing of individual UEs, the SCEF shall,

- for an HTTP POST request, create a new "Individual Monitoring Event Subscription" resource addressed by a URI that contains the SCS/AS identity and an SCEF-created subscription identifier, store the number of UEs received in the response message from the HSS within the resource and send an HTTP response to the SCS/AS with "201 Created" status code and a location header field containing the URI of the created resource, in order to acknowledge the SCS/AS of the successful group processing request.
- for an HTTP PUT request, update the active "Individual Monitoring Event Subscription" resource addressed by the request URL and send an HTTP response with "200 OK" status code to acknowledge the SCS/AS of the successful group processing request, or a "204 No Content" status code.
- for an HTTP DELETE request, delete the active "Individual Monitoring Event Subscription" resource addressed by the request URI and send an HTTP response to the SCS/AS with "204 No Content" status code.

If the SCEF receives a response with an error code from the HSS, the SCEF shall not create, update nor delete the concerned resource and respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

Upon receipt of the processing result of the individual UEs from the HSS, the SCEF shall behave as follows:

- if no Group Reporting Guard Time is received, the SCEF shall send an HTTP POST request message to the SCS/AS including a reference to the related monitoring subscription, a list of configuration failure result if received for the group members, and the "monitoringEventReports" attribute including a list of monitoring event reports if received for the group members;
- otherwise, the SCEF shall accumulate all of the configuration results and/or monitoring event reports received from the HSS for the group members until the Group Reporting Guard Time expires. Then the SCEF shall send an HTTP POST request message to the SCS/AS including a reference to the related monitoring subscription, and a list of configuration failure result if received for the group members, and the "monitoringEventReports" attribute including a list of monitoring event reports received before the Group Reporting Guard Time.
- If the Partial\_group\_modification feature is supported,
  - upon the cancellation of UE(s) within the active group identified by the "excludedExternalIds" and/or "excludedMsisdns" attributes is successful, the SCEF shall,
    - if the maximum number of reports applies to the monitoring event configuration of the cancelled UE(s), set the stored number of reports of the indicated UE(s) to the maximum number of reports;
    - still consider the rest of UE(s) as applicable within the active group based monitoring subscription to the group based Monitoring Event Report identified by the External Group Identifier;
    - determine whether the reporting for the group based event subscription is completed or not. If completed, the SCEF shall delete the corresponding "Individual Monitoring Event Subscription" resource with procedures as described in clause 4.4.2.3.
  - If the cancellation of UE(s) within the active group is unsuccessful, the SCEF shall respond with proper error code indicating the error and should return the appropriate additional error information in the POST response body.
  - upon the addition of UE(s) within the active group identified by the "addedExternalIds" and/or "addedMsisdns" attributes is successful, the SCEF shall,
    - still consider the existing of UE(s) as applicable within the active group based monitoring subscription to the group based Monitoring Event Report identified by the External Group Identifier;
    - subsequently apply monitoring event subscription to the new group member UEs.
  - If the addition of UE(s) within the active group is unsuccessful, the SCEF shall respond with proper error code indicating the error and should return the appropriate additional error information in the POST response body.

The SCS/AS shall send an HTTP response to acknowledge the SCEF about the handling result of the received HTTP POST request.

#### 4.4.2.2.3 Monitoring Events Configuration directly via MME/SGSN

The monitoring event "Number of UEs in a geographic area" is applicable for the monitoring event configuration via MME/SGSN. Only one-time reporting is supported for this event with the value of Maximum Number of Reports indicated by "maximumNumberOfReports" set to 1.

Upon receipt of an HTTP POST request from the SCS/AS, the SCEF shall

- resolve the location area to the involved SGSN(s)/MME(s) by local configuration;
- interact with the HSS via the S6t interface as specified in 3GPP TS 29.336 [11] if the External Group ID(s) is included; and
- interact with the SGSN(s)/MME(s) via the T6a/b interface as specified in 3GPP TS 29.128 [12].

NOTE: The SCEF uses local configuration to resolve the involved SGSN(s)/MME(s) if the location area is not received.

After collecting responses from the SGSN(s)/MME(s), if the SCEF does not receive any successful response from the involved SGSN(s)/MME(s), the SCEF shall respond to the SCS/AS with a corresponding failure code as described in

clause 5.2.6; otherwise the SCEF should send a response with 200 OK status code to acknowledge the SCS/AS with one aggregated report in the requested area by including the total count of the number of UEs in the "ueCount" attribute and the External Identifier(s) (if available) or the MSISDN(s) (if available) associated with the External Group ID.

NOTE: It is possible that the number of UEs does not reflect the actual number of UEs in the designated area (e.g. some SGSN(s)/MME(s) do not respond successfully). The SCEF still provides the result to the SCS/AS if at least one SGSN/MME returns a successful response.

#### 4.4.2.2.4 Monitoring Events Configuration via PCRF

##### 4.4.2.2.4.1 General

The following monitoring events: the location reporting event and communication failure event are applicable for the monitoring event configuration via PCRF for an individual UE.

NOTE: If monitoring event configuration via PCRF is used for a subscription resource, the Subscription\_modification feature cannot be supported.

Only the location reporting event is applicable for the monitoring event configuration via PCRF for a group of UEs.

Only one-time reporting is supported for the monitoring event configuration via PCRF.

HTTP PUT is not supported for the monitoring event configuration via PCRF. If it is received, the SCEF shall reject the HTTP PUT message with 403 Forbidden during monitoring and may indicate the "OPERATION\_PROHIBITED" error in the "cause" attribute of the "ProblemDetails" structure.

##### 4.4.2.2.4.2 Configuration Request for an individual UE

Upon receipt of an HTTP POST request from the SCS/AS for an individual UE, the SCEF shall:

- interact with the PCRF via the Rx interface by using an existing AF session or establishing a new AF session as specified in 3GPP TS 29.214 [10];

NOTE 1: The SCEF can derive the service information over the Rx interface based on SCS/AS ID for communication failure event.

- after receiving the AAA message from the PCRF, create a resource which represents the monitoring event configuration addressed by a URI that contains the SCS/AS identifier and an SCEF-created subscription identifier; and
- send a corresponding status code to acknowledge the SCS/AS of the successful processing of the request in the HTTP response message.

Then the SCEF shall wait for the reporting from the PCRF as specified in 3GPP TS 29.214 [10].

NOTE 2: Different events can be reported in different messages according to 3GPP TS 29.214 [10], e.g. STR/RAR for communication failure.

During configuration resource deletion, the SCEF shall also terminate the AF session if it was established and used only for event monitoring.

##### 4.4.2.2.4.3 Configuration Request for a group of UEs

Upon receipt of an HTTP POST request from the SCS/AS for a group of UEs, the SCEF shall:

- interact with all PCRFs in the same PLMN via Nta application of Nt interface as specified in 3GPP TS 29.154 [9];
- after collecting ECA message from all PCRFs, create a resource which represents the monitoring event configuration addressed by a URI that contains the SCS/AS identifier and an SCEF-created subscription identifier; and
- send a corresponding status code to acknowledge the SCS/AS of the successful processing of the request in the HTTP response message.



Then the SCEF shall wait for the reporting from the PCRF(s) as specified in 3GPP TS 29.154 [9].

#### 4.4.2.3 Reporting of Monitoring Event Procedure

Upon receipt of a Monitoring Event Report from the HSS or the MME/SGSN as defined in clause 5.6.3 or clause 5.6.8 of 3GPP TS 23.682 [2], from the PCRF as defined in clause 5.6.5 or from the IWK-SCEF as defined in clause 5.6.8 of 3GPP TS 23.682 [2], the SCEF shall determine the monitoring event subscription associated with the corresponding Monitoring Event Report.

If the monitoring event subscription refers to a Monitoring Event Configuration for a single UE or to a group-based Monitoring Event configuration, and no Group Reporting Guard Time was set, then the SCEF shall send an HTTP POST message including a link to the SCEF-created subscription resource and the received Monitoring Event Report to the identified destination. If the monitoring event subscription refers to a group-based Monitoring Event Configuration and Group Reporting Guard Time was provided during the Monitoring Event configuration procedure, then the SCEF shall accumulate all of the received Monitoring Event reports for the group of UEs until the Group Reporting Guard Time expires or the monitoring duration indicated by the property "monitorExpireTime" is reached.

Upon expiration of Group Reporting Guard Time or expiration of the monitoring duration, the SCEF shall send an HTTP POST message to the identified destination including a link to the SCEF-created subscription resource and the list of accumulated Monitoring Event Reports for each UE identified by either its External Identifier or MSISDN. The destination URL of the HTTP POST message is provided by the SCS/AS during the Monitoring Event Configuration procedure.

If the monitoring event subscription refers to a one-time monitoring request or a continuous monitoring request, but the maximum number of reports is reached, the SCEF shall consider the reporting as completed, delete the corresponding "Individual Monitoring Event Subscription" resource and send an HTTP POST message including the subscription identifier and a cancellation indication to the identified destination. The cancellation indication shall set to "true" indicating to cancel the configured monitoring subscription. The destination URL of the HTTP POST is provided by the SCS/AS during the Monitoring Event Configuration procedure. In addition, the SCEF shall interact with the HSS to delete the event configuration if the latter was performed via the HSS whereas event reports were performed via the SGSN/MME. The SCEF determines that the reporting for a group is completed by comparing the total number of received reports with the number of UEs of the group (received from the HSS during event configuration for a group of UEs) multiplied by the maximum number of reports.

If the Partial\_group\_modification feature is supported and one or more MSISDN(s) or External Identifier(s) within the active group based monitor subscription have been cancelled or added, the existing UE(s) within the active group based monitoring subscription are still applicable to the group based Monitoring Event Report identified by the External Group Identifier, the added group member(s) shall be subsequently applied with the monitoring event subscription.

When the monitoring duration indicated by the property "monitorExpireTime" is reached, the SCEF shall delete the related event subscription and event configuration locally. The SCS/AS shall no longer address the corresponding "Individual Monitoring Event Subscription" resource.

#### 4.4.2.4 Network-initiated Explicit Monitoring Event Deletion Procedure

Upon receipt of an SCEF Reference ID for the event to be deleted from the HSS as defined in 3GPP TS 29.336 [11], the SCEF shall determine the subscription identifier associated with the indicated active monitoring subscription. Then the SCEF shall delete the related resource "Individual Monitoring Event Subscription", send an HTTP POST message including the subscription identifier and a cancellation indication to the identified destination. The cancellation indication shall set to "true" indicating to cancel the configured monitoring subscription. The destination URL of the HTTP POST is provided by the SCS/AS during the Monitoring Event Configuration procedure.

If the Partial\_group\_cancellation feature is supported, upon receipt of one or more MSISDN(s) or External Identifier(s) for the group member(s) to be cancelled within the active group based event subscription from the HSS as defined in 3GPP TS 29.336 [11], the SCEF shall,

- if the maximum number of reports applies to the monitoring event configuration, set the stored number of reports of the indicated UE(s) to the maximum number of reports;
- include the MSISDN(s) or External Identifier(s) to be cancelled in the MonitoringNotification Request to the destination URL provided by the SCS/AS during the Monitoring Event Configuration procedure; and

- determine whether the reporting for the group based event subscription is completed or not. If completed, the SCEF shall delete the corresponding "Individual Monitoring Event Subscription" resource with procedures as described in clause 4.4.2.3.

NOTE: The above procedure can be triggered from the HSS due to parameter overwritten by Network Parameter Configuration.

#### 4.4.2.5 Network initiated notification of applied parameter configuration

For "LOSS\_OF\_CONNECTIVITY" and "UE\_REACHABILITY" events, if the "Enhanced\_param\_config" feature is supported and the SCEF receives the currently applied parameter configuration from the HSS, the SCEF shall notify the SCS/AS via an HTTP POST message including the parameter changes in the "appliedParam" attribute.

### 4.4.3 Procedures for resource management of Background Data Transfer

These procedures are used by an SCS/AS to perform the resource management of background data transfer (BDT) to a set of UEs, i.e. the SCS/AS requests a time window and related conditions from the SCEF via the T8 interface.

In order to create a resource for the background data transfer policy, the SCS/AS shall send an HTTP POST message to the SCEF for the "BDT Subscriptions" resource to negotiate the transfer policy. The body of the HTTP POST message shall include SCS/AS Identifier, Volume per UE (total volume for both DL and UL or separate volume for DL and/or UL), Number of UEs, Desired Time Window and optionally a location area information.

After receiving the HTTP POST message, if the SCS/AS is authorized, the SCEF shall map the SCS/AS Identifier to ASP Identifier and negotiate the transfer policy with the PCRF as defined in 3GPP TS 29.154 [9]. After receiving the response including the determined transfer policies from the PCRF, the SCEF shall create a resource "Individual BDT Subscription" which represents the BDT subscription, addressed by a URI that contains the SCS/AS identifier and an SCEF-created subscription identifier, and shall respond to the SCS/AS with a 201 Created message, including a Location header field containing the URI for the created resource and a message body, which may also include Reference ID and a set of transfer policies. The SCS/AS shall use the URI received in the Location header in subsequent requests to the SCEF to refer to this background data transfer subscription. If the SCEF receives a response with an error code from the PCRF, the SCEF shall not create the resource and shall respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

The SCS/AS may also send an HTTP PUT message to the SCEF for the "Individual BDT Subscription" resource to request starting an update for negotiation of background data transfer policy. The body of the HTTP PUT message shall include data as described in the POST message. The external group identifier shall remain unchanged from previously provided value. After receiving such request, if the SCS/AS is authorized, the SCEF shall negotiate the transfer policy with the PCRF as defined in 3GPP TS 29.154 [9]. After receiving the response including the determined transfer policies from the PCRF, the SCEF shall send an HTTP response to the SCS/AS with a "200 OK" status code and shall include the Bdt data type in the response body, or with a "204 No Content" status code. If the SCEF receives a response with an error code from the PCRF, the SCEF shall not update the resource and shall respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

NOTE 1: The SCEF starts a new BDT policy negotiation in the Nt interface by sending the request to the PCRF without the previously associated BDT Reference ID.

If more than one policy is included in the HTTP response, the SCS/AS shall send an HTTP PATCH message to inform the SCEF for the "Individual BDT Subscription" resource of the transfer policy selected by the SCS/AS. After receiving the HTTP PATCH message, the SCEF shall send an HTTP response to the SCS/AS with a "200 OK" status code and shall include the Bdt data type in the response body, or with a "204 No Content" status code, then the SCEF shall interact with the PCRF as defined in 3GPP TS 29.154 [9]. If the SCEF identifies any error (e.g. selected policy is not within the set of transfer policies), the SCEF shall not update the resource and shall respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

The SCS/AS may also send an HTTP DELETE message to the SCEF for the "Individual BDT Subscription" resource requesting to remove an individual resource identified by the URI received in the response to the request that has created resource a URI. After receiving such request, the SCEF shall delete the resource and send an HTTP response to the SCS/AS with a corresponding status code.

NOTE 2: The SCEF can also remove the resource when the last window end time in transfer policies expires.

#### 4.4.4 Procedures for changing the chargeable party at session set up or during the session

This procedure is used by an SCS/AS to either request to sponsor the traffic from the beginning or to request becoming the chargeable party at a later point in time via the T8 interface.

When setting up the connection between the AS and the UE via the SCEF, the SCS/AS shall send an HTTP POST request to the SCEF, targeting the "Chargeable Party Transactions" resource, to become the chargeable party for the session to be set up. The body of the HTTP POST message shall include the SCS/AS Identifier, UE IP address, IP Flow description, Sponsor ID, ASP ID, Sponsoring Status, notification destination URI identifying the recipient of notifications within the "notificationDestination" attribute and may include the time period and/or traffic volume used for sponsoring. The SCS/AS may also request to activate a previously selected policy of background data transfer by including the associated Reference ID in the body of the HTTP POST message. If the feature AppId is supported, either the Flow description or an external Application Identifier shall be included.

After receiving the HTTP POST request, if the authorization performed by the SCEF is successful, the SCEF shall act as an AF and interact with the PCRF via the Rx interface, as defined in 3GPP TS 29.214 [10] or 3GPP TS 29.201 [13], to trigger a PCRF initiated IP-CAN Session Modification. The SCEF may map the SCS/AS Identifier to AF Application Identifier if the external Application Identifier is not provided and only one AF Application Identifier is mapped and may request to be notified about the traffic plane status based on local configuration. If the time period and/or traffic volume are received from the SCS/AS, the SCEF should subscribe with the PCRF to the USAGE\_REPORT event.

If the "enNB" feature is supported, the SCEF may explicitly receive a list of event(s) that the SCS/AS requests to subscribe to. The SCEF shall subscribe to the corresponding PCRF event(s) (e.g. INDICATION\_OF\_SUCCESSFUL\_RESOURCE\_ALLOCATION) for the received event(s) (e.g. SUCCESSFUL\_RESOURCES\_ALLOCATION) except for SESSION\_TERMINATION.

NOTE 1: PCRF does not need explicit subscription in order to notify Rx session termination.

After receiving a successful response from the PCRF, the SCEF shall create a new "Individual Chargeable Party Transaction" resource, which represents the chargeable party transaction, addressed by a URI that contains the SCS/AS identity and an SCEF-created transaction identifier, and shall respond to the SCS/AS with a 201 Created status code, including a Location header field containing the URI of the created resource. The SCS/AS shall use the URI received in the Location header in subsequent requests to the SCEF to refer to this chargeable party transaction. If the SCEF receives a response with an error code from the PCRF, the SCEF shall not create a resource and respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

In order to update the sponsoring status of an established AS session, the SCS/AS shall send an HTTP PATCH message to the SCEF targeting the associated "Individual Chargeable Party Transaction" resource requesting to partial update a chargeable party transaction resource (e.g. change the Sponsoring Status, update the list of event(s) if the "enNB" feature is supported). When receiving the HTTP PATCH message, the SCEF shall make the change and interact with the PCRF to modify the Rx session as defined in 3GPP TS 29.214 [10] or 3GPP TS 29.201 [13]. After receiving a response with successful result code from the PCRF, the SCEF shall send an HTTP response to the SCS/AS with a "200 OK" status code and the result if any in the body of the HTTP response or a "204 No Content" status code. The accumulated usage received from the PCRF shall be included in the HTTP response with the "200 OK" status code if the SCS/AS requested to disable the sponsoring. If the SCEF receives a response with an error code from the PCRF, the SCEF shall not update the resource and respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

NOTE 2: The SCS/AS can assume a successful resource allocation upon receipt of the POST/PATCH response until the FAILED\_RESOURCES\_ALLOCATION event is received.

NOTE 3: The SCS/AS can update the list of user plane event(s) only for one time specific events, i.e. INDICATION\_OF\_SUCCESSFUL\_RESOURCES\_ALLOCATION, INDICATION\_OF\_FAILED\_RESOURCES\_ALLOCATION and USAGE\_REPORT events, as specified in clause 5.3.13 of 3GPP TS 29.214 [10].

If the SCEF receives a traffic plane notification (e.g. the usage threshold is reached or transmission resource lost) or gets informed that the Rx session is terminated (e.g. due to the release of PDN connection), the SCEF shall send an HTTP POST message including the notified event (e.g. session terminated) and the accumulated usage to the SCS/AS identified by the notification destination URI received during session set up. The SCS/AS shall respond with an HTTP response to confirm the received notification.

In order to remove an established AS session, the SCS/AS shall send an HTTP DELETE message to the SCEF targeting the associated "Individual Chargeable Party Transaction" resource. After receiving the HTTP DELETE message, the SCEF shall remove all properties of the resource and interact with the PCRF to terminate the Rx session (as defined in 3GPP TS 29.214 [10] or 3GPP TS 29.201 [13]). After receiving the response from the PCRF, the SCEF shall send an HTTP response to the SCS/AS with a corresponding status code and the accumulated usage (if received from the PCRF).

## 4.4.5 Procedures for Non-IP Data Delivery

### 4.4.5.1 General

This procedure is used by an SCS/AS to support the Non-IP Data Delivery (NIDD) via SCEF. It performs the NIDD configuration via the T8 interface. It also includes the mobile terminated (MT) and mobile originated (MO) communication with UEs via the T8 interface. It also includes the group message delivery via MT NIDD via the T8 interface and management of port numbers on UE and SCEF and their dynamic association with different applications.

Error handling for the procedures in this clause shall be handled based on clause 5.2.6.

### 4.4.5.2 NIDD Configuration

#### 4.4.5.2.1 NIDD Configuration for a single UE

For a NIDD configuration creation, the SCS/AS shall send an HTTP POST message to the SCEF for the "NIDD configurations" resource. The body of the HTTP POST message shall include External Identifier or MSISDN, SCS/AS Identifier, notification destination URI identifying the recipient of notification within the "notificationDestination" attribute and may include NIDD Duration, PDN Connection Establishment Option and Reliable Data Service Configuration. In addition, the SCS/AS may send non-IP data and its associated parameters (e.g. Priority) as described in clause 4.4.5.3.1 in the NIDD configuration creation request. The Reliable Data Service Configuration includes port numbers on UE and SCEF that are used to identify specific applications for data transfer between UE and SCS/AS and an indication if reliable data service acknowledgement is enabled or not.

Upon receipt of the HTTP POST request from the SCS/AS to create a NIDD configuration, the SCEF shall check whether the SCS/AS is authenticated and authorized to create NIDD configuration, and also authorize the NIDD configuration. If authorization is successful, the SCEF shall interact with the HSS via S6t as specified in 3GPP TS 29.336 [11]. Upon receipt of the successful response from the HSS, the SCEF shall store the UE identity (IMSI and External Identifier or MSISDN) which is associated with the External Identifier or MSISDN and create a resource "Individual NIDD configuration", which represents the NIDD configuration, addressed by a URI that contains the SCS/AS identity and an SCEF-created NIDD configuration identifier, and shall respond to the SCS/AS with a 201 Created message, including a Location header field containing the URI for the created resource. The body of the response message shall include Maximum Packet Size and may include Reliable Data Service Indication. When the SCS/AS receives the URI in the Location header, it shall use this URI in subsequent requests to the SCEF to refer to this NIDD configuration.

If the SCS/AS includes a downlink non-IP data together with the NIDD configuration creation, the SCEF shall also create the corresponding "Individual NIDD downlink data delivery" sub-resource(s) and send each of the sub-resource(s) within the "self" attribute in the "niddDownlinkDataTransfers" attribute together with the created resource "Individual NIDD configuration" which included in the Location header field in the HTTP POST response. When the SCS/AS receives the URI the "self" attribute in the "niddDownlinkDataTransfers" attribute, it shall use this URI in subsequent requests to the SCEF to refer to this downlink data delivery transfer.

After sending the HTTP response to NIDD configuration request, the SCEF shall perform the procedure for individual MT NIDD as described in clause 4.4.5.3.1.

**NOTE:** Any further interaction with the SCS/AS for the piggybacked individual MT NIDD is performed by the notification of NIDD downlink data delivery status.

For a NIDD configuration modification, the SCS/AS shall send an HTTP PATCH message to the SCEF for the "Individual NIDD configuration" resource, using the URI received in the response to the request that has created the NIDD configuration resource. Upon receipt of the HTTP PATCH request from the SCS/AS to update the parameters of the NIDD configuration, the SCEF shall check whether the SCS/AS is authenticated and authorized to update NIDD configuration. If the authorization is successful, the SCEF shall verify that the resource to be modified already exists as

identified by the URI. If the NIDD configuration resource is found, the SCEF shall update the NIDD configuration as requested. Upon successful update of the requested NIDD configuration including the interaction with the HSS via S6t as specified in 3GPP TS 29.336 [11], the SCEF shall respond to the SCS/AS with a 200 OK success message indicating that the NIDD configuration resource was successfully updated, or with a 204 No Content success message if the NIDD configuration modification is successful updated with no content in the PATCH response message body.

For a NIDD configuration cancellation, the SCS/AS shall send an HTTP DELETE message to the SCEF for the "Individual NIDD configuration" resource, using the URI received in the response to the request that has created the NIDD configuration resource. Upon receipt of the HTTP DELETE message from the SCS/AS, the SCEF shall check whether the SCS/AS is authenticated and authorized to delete NIDD configuration. If the authorization is successful, the SCEF shall verify that the NIDD configuration resource identified by the URI already exists. If the configuration resource exists, the SCEF shall delete the requested configuration, and perform related NIDD procedure to EPC network elements if applicable. Upon successful deletion of requested NIDD configuration, the SCEF shall respond to the SCS/AS with a 200 OK success message indicating that the NIDD configuration was successfully cancelled. As an alternative to the 200 OK success message, the SCEF may send a 204 No Content success message without any message content to the SCS/AS.

When the NIDD Duration expires, the SCEF may remove the associated NIDD configuration resource and all individual downlink data delivery resources under such NIDD configuration.

#### 4.4.5.2.2 NIDD Configuration for a group of UEs

The NIDD configuration procedure for a single UE as described in clause 4.4.5.2.1 shall be applicable for a group of UEs with the following differences:

- The External Group Identifier shall be included in the POST request instead of MSISDN or External Identifier.
- After receiving the response message from the HSS, the SCEF shall store the list of UE identifiers (IMSI and External Identifier or MSISDN) which are associated with the External Group Identifier.
- The downlink non-IP data is not supported to be handled together with the NIDD configuration.

#### 4.4.5.3 Mobile Terminated NIDD procedure

##### 4.4.5.3.1 Mobile Terminated NIDD for a single UE

If the SCS/AS needs to perform a downlink non-IP data delivery for a single UE, the SCS/AS shall send an HTTP POST message to the SCEF for the "NIDD downlink data deliveries" resource, identifying an existing NIDD configuration resource as parent resource. The body of the HTTP POST message shall include External Identifier or MSISDN and non-IP data and may include PDN Connection Establishment Option, Reliable Data Service Configuration, Maximum Latency and Priority. The Reliable Data Service Configuration includes port numbers on UE and SCEF that are used to identify a specific application for data transfer between UE and SCS/AS and an indication if reliable data service acknowledgement is enabled or not.

Upon receipt of a HTTP POST request from the SCS/AS for a downlink data delivery for a single UE, the SCEF shall:

- verify the NIDD configuration resource already exists based on the URI passed, if the configuration resource does not exist, the SCEF shall respond with a 404 Not Found response to reject the downlink data delivery, and
- check whether the SCS/AS is authorised to send NIDD requests, if not authorized, the SCEF shall respond with a 401 Unauthorized response to reject the downlink data delivery, and
- check whether the non-IP packet size is larger than the Maximum Packet Size that was provided to the SCS/AS during NIDD Configuration. If the packet is oversized, the SCEF shall respond with a 403 Forbidden response with a cause value "DATA\_TOO\_LARGE" in the "cause" attribute of the "ProblemDetails" data structure indicating received non-IP packet size is larger than "maximumPacketSize" of the NIDD configuration.
- if the Rds\_port\_verification feature is supported, check whether the RDS port numbers are within the configured RDS port list. If the RDS port numbers are unknown in the SCEF, the SCEF shall respond with a 403 Forbidden response with a cause value "RDS\_PORT\_UNKNOWN" in the "cause" attribute of the "ProblemDetails" data structure.

If all above checks are successful, the SCEF shall determine the EPS Bearer Context based on the APN associated with the NIDD configuration and the User Identity. If the SCEF EPS bearer context is not found in the SCEF, depending on PDN Connection Establishment Option received in the POST request or from NIDD configuration, the SCEF may:

- reject the request with an error message to the SCS/AS;
- send a Device Trigger to the UE as described in clause 4.4.6 without buffering the non-IP data and respond the SCS/AS with a 500 Internal Server Error response and a cause value "TRIGGERED" in the "cause" attribute of the "ProblemDetails" data structure; or
- buffer the non-IP data and create the "Individual NIDD downlink data delivery" sub-resource, then send a 201 Created response to the SCS/AS. The response message also includes an indication of whether the Device Trigger procedure (as described in clause 4.4.6) was performed by the SCEF. A Location header shall be included in the response message that provides the URI of the resource identifying this individual downlink data delivery. The SCS/AS shall use the URI received in the Location header in subsequent requests to the SCEF to refer to this individual downlink data delivery for possible replacement or cancellation. The non-IP data shall be delivered when the non-IP PDN connection is established.

If the SCEF EPS bearer context is found in the SCEF, the SCEF shall check if the SCS/AS has exceeded the quota or rate of data submission considering the number of existing buffered non-IP data and restriction in APN and serving PLMN rate control. If quota is reached, the SCEF shall respond the SCS/AS with a 403 Forbidden response and a cause value "QUOTA\_EXCEEDED" in the "cause" attribute of the "ProblemDetails" data structure indicating the reason for the failure condition. If rate limit is reached, the SCEF shall respond the SCS/AS with a 429 Too Many Requests response.

If the check is passed, the SCEF shall continue the downlink non-IP data delivery procedure as the defined 3GPP TS 29.128 [12].

If the non-IP data delivery was successful, the SCEF shall send a 200 OK response to the HTTP POST request indicating the downlink non-IP data delivery is successful along with the acknowledge information; otherwise the SCEF may:

- send a 500 Internal Server Error response and a cause value indicating the reason for the delivery failure within the "cause" attribute of the "ProblemDetails" data structure, i.e.:
  1. if delivery was unsuccessful due to timeout, the cause value "TIMEOUT"; or
  2. if delivery to the next hop was unsuccessful with the cause value "NEXT\_HOP"; or
- if the MME/SGSN indicates UE is temporary not reachable, either:
  1. buffer the non-IP data and create the "Individual NIDD downlink data delivery" sub-resource, then send a 201 Created response to the SCS/AS. The response may include a Requested Re-Transmission time to indicate the SCS/AS when the UE is expected to be reachable so that the SCEF re-transmits the buffered non-IP data; or
  2. send a 500 Internal Server Error response without buffering the non-IP data, and include a cause value "TEMPORARILY\_NOT\_REACHABLE" in the "cause" attribute of the "ProblemDetails" data structure indicating the downlink non-IP data delivery is performed but stopped since UE is temporarily unreachable. The response may include a Requested Re-Transmission time to indicate the SCS/AS when the UE is expected to be reachable so that the SCS/AS may prepare any re-transmission.

If the MT\_NIDD\_modification\_cancellation feature is supported and the SCS/AS decides to replace the pending downlink data delivery in the SCEF, the SCS/AS shall send an HTTP PUT message to the SCEF, using the URI received in the response to the request that has created the individual downlink data delivery resource. The External Identifier or MSISDN shall remain unchanged from previous values. Upon receipt of the HTTP PUT request from the SCS/AS, the SCEF shall check whether a pending non-IP data exists with the same URI (i.e. resource exists). If it is found, the SCEF shall replace it with the new non-IP data and continue waiting for any message from the MME/SGSN for the UE indicating either the non-IP PDN connection is being established or the UE is reachable (such message may be an MO NIDD); otherwise the SCEF shall respond with a 409 Conflict response with a cause value "SENDING" in the "cause" attribute of the "ProblemDetails" data structure indicating replacement failure. If the buffered data is already delivered, the SCEF shall respond with a 404 Not Found response and include a cause value "ALREADY\_DELIVERED" in the "cause" attribute of the "ProblemDetails" data structure indicating replacement failure. If delivery was unsuccessful due to timeout, the SCEF shall respond with a 500 Internal Server Error response

with a cause value "TIMEOUT" in the "cause" attribute of the "ProblemDetails" data structure. If delivery to the next hop was unsuccessful, the SCEF shall respond with a 500 Internal Server Error response with a cause value "NEXT\_HOP" in the "cause" attribute of the "ProblemDetails" data structure.

If the "PatchUpdate" feature defined in clause 5.6.4 is supported and the SCS/AS decides to partially modify the pending downlink data delivery in the SCEF, the SCS/AS shall send an HTTP PATCH message to the SCEF to the URI received in the response to the request that has created the concerned individual downlink data delivery resource. The request body shall contain the NiddDownlinkDataTransferPatch data structure including only the attributes that shall be updated. Upon reception of this HTTP PATCH request from the SCS/AS, the SCEF shall check whether a pending non-IP data with the received URI exists (i.e. the resource exists). If it is found, the SCEF shall apply the requested modifications and continue waiting for any message from the MME/SGSN for the UE indicating either the non-IP PDN connection is being established or the UE is reachable (such message may be an MO NIDD); otherwise the SCEF shall respond with a "409 Conflict" status code including a cause value "SENDING" within the "cause" attribute of the "ProblemDetails" data structure to indicate modification failure. If the buffered data is already delivered, the SCEF shall respond with a "404 Not Found" status code including a cause value "ALREADY\_DELIVERED" within the "cause" attribute of the "ProblemDetails" data structure to indicate modification failure. If delivery was unsuccessful due to timeout, the SCEF shall respond with a 500 Internal Server Error status code with a cause value "TIMEOUT" in the "cause" attribute of the "ProblemDetails" data structure. If delivery to the next hop was unsuccessful, the SCEF shall respond with a 500 Internal Server Error status code with a cause value "NEXT\_HOP" in the "cause" attribute of the "ProblemDetails" data structure.

If the MT\_NIDD\_modification\_cancellation feature is supported and the SCS/AS decides to cancel the pending downlink data delivery in the SCEF, the SCS/AS shall send an HTTP DELETE message to the SCEF, using the URI received in the response to the request that has created the individual downlink data delivery resource. Upon receipt of the HTTP DELETE request from the SCS/AS, the SCEF shall check whether a pending request exists with the same URI. If such non-IP data has not been delivered, the SCEF shall remove the individual downlink data delivery resource and respond with an HTTP 204 No Content response; otherwise the SCEF shall respond with a 404 Not Found response (i.e. data already delivered) with a cause value "ALREADY\_DELIVERED" in the "cause" attribute of the "ProblemDetails" data structure or 409 Conflict (i.e. data delivery ongoing) response with a cause value "SENDING" in the "cause" attribute of the "ProblemDetails" data structure, and include a cause value indicating cancellation failure.

If a pending non-IP data is delivered by the SCEF (e.g. due to non-IP PDN connection establishment), and the SCEF gets the delivery result from the MME/SGSN, the SCEF shall remove the "Individual NIDD downlink data delivery" sub-resource and send an HTTP POST message to the SCS/AS, identified by the notification destination URI received during the NIDD configuration, to notify the delivery result for the pending non-IP data. Upon receipt of the request, the SCS/AS shall acknowledge the notification with an HTTP 200 OK or 204 No Content response.

During MT NIDD delivery, if the UE indicates no support for RDS and the SCEF previously indicated RDS is enabled to the SCS/AS, the SCEF shall stop sending the non-IP data and send MT NIDD delivery notification with "FAILURE\_RDS\_DISABLED" delivery status.

#### 4.4.5.3.2 Mobile Terminated NIDD for a group of UEs

If the SCS/AS needs to perform a downlink non-IP data delivery to a group of UEs and if both the SCS/AS and the SCEF support GroupMessageDelivery feature as defined in clause 5.6.4, the SCS/AS shall send an HTTP POST request message to the SCEF for the "NIDD downlink data deliveries" resource, identifying an existing NIDD configuration resource as parent resource. The body of the HTTP POST request message shall include the External Group Identifier and the non-IP data, and may include Reliable Data Service Configuration, PDN Connection Establishment Option and Maximum Latency.

Upon receipt of such an HTTP POST request from the SCS/AS requesting the group message delivery, the SCEF checks whether the SCS/AS is authorised to send NIDD requests, whether the non-IP packet size is larger than the Maximum Packet Size that was provided to the SCS/AS during NIDD Configuration and if the Rds\_port\_verification feature is supported whether the RDS port numbers are recognized. If any of those checks fails, the SCEF shall respond with a HTTP response with a cause value indicating the reason for the failure condition. If all checks are successful, the SCEF shall create an "Individual NIDD downlink data delivery" resource and sends a 201 Created response to the SCS/AS to acknowledge acceptance of the HTTP POST request.

Then for each authorized External Identifier associated to the External Group Identifier which is retrieved from the HSS during preceding NIDD configuration procedure (as specified in clause 4.4.5.2.2), the SCEF shall determine the EPS Bearer Context based on the APN associated with the NIDD configuration and the User Identity and continue the procedure as described for MT NIDD for a single UE in clause 4.4.5.3.1 without sending downlink data delivery status notification for any individual UE to the SCS/AS.

At the end of buffering (duration determined by the Maximum Latency or local policy) or after processing data delivery for all UEs in the group, the SCEF shall send an HTTP POST message to SCS/AS to indicate the aggregated result of data delivery of each UE. The body of the HTTP POST request message shall include MSISDN or External Identifier, Retransmission Time (optional) and delivery result for each UE. Upon receipt of the request, the SCS/AS shall acknowledge the request with an HTTP 200 OK or 204 No Content response.

The MT\_NIDD\_modification\_cancellation feature is not supported for the group message delivery via NIDD. If a PUT or DELETE request is received for the "Individual NIDD downlink data delivery" resource which was created for a group of UEs, the SCEF shall reject the message with a 403 Forbidden response with a cause value "OPERATION\_PROHIBITED" in the "cause" attribute of the "ProblemDetails" data structure.

During MT NIDD delivery, if the UE indicates no support for RDS and the SCEF previously indicated RDS is enabled to the SCS/AS, the SCEF shall stop sending the non-IP data for the indicated UE. In the aggregated MT NIDD delivery notification, the SCEF shall send "FAILURE\_RDS\_DISABLED" delivery status for each failed UE.

#### 4.4.5.4 Mobile Originated NIDD procedure

When the SCEF receives the non-IP data from MME/SGSN (or IWK-SCEF) as defined in 3GPP TS 29.128 [12], and finds an SCEF EPS bearer context and the associated NIDD configuration, the SCEF shall determine the SCS/AS by the corresponding NIDD configuration, and send an HTTP POST request to the SCS/AS identified by the Notification Destination Address received in the NIDD configuration to notify the uplink non-IP data. The body of the HTTP POST message shall include External Identifier or MSISDN, non-IP data, NIDD configuration identifier, Reliable Data Service Configuration (if available). The Reliable Data Service Configuration includes port numbers on UE and SCEF that are used to identify a specific application for data transfer between UE and SCS/AS and an indication if reliable data service acknowledgement is enabled or not.

Upon receipt of the request, if the SCS/AS knows the NIDD configuration identified by the NIDD configuration identifier, the SCS/AS shall acknowledge a 200 OK or 204 No Content message to the SCEF.

#### 4.4.5.5 NIDD Authorisation Update procedure

When the SCEF receives a NIDD Authorisation Update Request message from HSS to update a user's NIDD authorisation as defined in 3GPP TS 29.336 [11], the SCEF shall determine the SCS/AS with the corresponding NIDD Configuration, and send an HTTP POST message to the SCS/AS to notify it of the NIDD Authorisation Update. The body of the HTTP POST message shall include External Identifier or MSISDN, NIDD configuration identifier and the NIDD configuration status.

Upon receipt of the request, if the SCS/AS knows the corresponding NIDD configuration, then the SCS/AS shall acknowledge the request with an HTTP 200 OK or 204 No Content response.

If the NIDD configuration is revoked by the HSS within the received NIDD Authorisation Update Request, the SCEF shall release the corresponding T6a/b PDN connection as specified in 3GPP TS 29.128 [12]. In this case, the SCEF shall reject any subsequent MT NIDD deliveries with a 403 Forbidden response. Or 404 Not Found is returned, if the SCEF locally removed the associated NIDD configuration resource when the configuration was revoked.

If the RDS capability is changed, e.g. when the T6a/b PDN connection is established, the UE indicates no support for RDS but the SCEF previously indicated RDS is supported to the SCS/AS in the NIDD configuration procedure, the SCEF shall send an HTTP POST message to notify the SCS/AS that the NIDD status is active and RDS capability indication. The SCS/AS shall acknowledge the request with an HTTP 200 OK or 204 No Content response.

If the Rds\_port\_verification feature is supported, before sending the MO NIDD to the SCS/AS as specified in clause 4.4.5.4, the SCEF shall check RDS port numbers (decoded from the uplink non-IP data according to 3GPP TS 24.250 [31]). If the RDS port numbers are not within the configured RDS port list, the SCEF shall notify the SCS/AS with NIDD status set to "RDS\_PORT\_UNKNOWN" and the unknown RDS port numbers. The SCS/AS shall acknowledge the request with an HTTP 200 OK or 204 No Content response.



## 4.4.5.6 Port Management Configuration

### 4.4.5.6.1 Port Reservation and Release

As part of the Port Management configuration, operations to reserve a combination of port numbers, release a combination of port numbers, query the list of port numbers that are reserved and notification of reservation of a port number may be performed, if the `Rds_dynamic_port` feature is supported.

Indication of the supported serialization formats by the SCS/AS, query of the supported and configured serialization formats by the SCS/AS, and notification of the supported and configured serialization formats by the SCS/AS may be performed if the `Rds_serialization_format` feature is supported.

If the SCS/AS needs to reserve port numbers and associate them with an application, the SCS/AS shall send an HTTP PUT message to the SCEF, using the URI received in the response to the request that has created the NIDD configuration resource and the specific part of `"/rds-ports/{portId}"` as described in clause 5.6.3.9.2. The SCS/AS may use this operation to reserve port numbers on the UE and SCEF and associate them with an application. The SCS/AS may also use this operation to indicate the serialization formats that are supported by the SCS/AS on the port. Upon receipt of the HTTP PUT request from the SCS/AS,

- if the `"skipUeInquiry"` is set to `"false"` and if the `"individual ManagePort Configuration"` resource already exists in the same NIDD configuration, the SCEF shall respond with a 403 Forbidden response with a cause value `"PORT_NOT_FREE"` in the `"cause"` attribute of the `"ProblemDetails"` data structure; otherwise, the SCEF shall interact with the UE via the SGSN/MME to reserve the port and optionally configure the serialization format by using RDS protocol as specified in 3GPP TS 24.250 [31] and return a 202 Accept response to the SCS/AS if successful response is received from the SGSN/MME. Then if the SCEF receives successful UE response, the SCEF shall create the `"individual ManagePort Configuration"` resource and notify the SCS/AS with the reserved port and configured serialization format as specified in clause 4.4.5.6.2, the SCEF shall also mark the resource is created by the SCS/AS; otherwise, the SCEF shall notify the SCS/AS about the currently reserved ports as specified in clause 4.4.5.6.2.
- if the `"skipUeInquiry"` is set to `"true"` and if the requested SCEF port already exists in an NIDD configuration within the same APN, the SCEF shall respond with a 403 Forbidden response with a cause value `"PORT_NOT_FREE"` in the `"cause"` attribute of the `"ProblemDetails"` data structure; otherwise, the SCEF shall create the `"individual ManagePort Configuration"` resource and send an HTTP 201 Created response to the SCS/AS, the SCEF shall also mark the resource is created by the SCS/AS and notify the UE by using RDS protocol as specified in 3GPP TS 24.250 [31].

If the SCEF is not able to configure a serialization format for the port and if the `Rds_serialization_format` feature is supported, the SCEF shall respond with a 500 Internal Server Error response with a cause value `"SERIALIZATION_FORMAT_NOT_SUPPORTED"` in the `"cause"` attribute of the `"ProblemDetails"` data structure.

If the SCS/AS needs to release port numbers associated with an application, the SCS/AS shall send an HTTP DELETE message to the SCEF, using the URI received in the response to the request that has created the `"individual ManagePort Configuration"` resource. Upon receipt of the HTTP DELETE request from the SCS/AS, if the `"individual ManagePort Configuration"` resource does not exist in the same NIDD configuration, the SCEF shall respond with a 404 Not Found response with a cause value `"PORT_NOT_ASSOC_WITH_APP"` in the `"cause"` attribute of the `"ProblemDetails"` data structure; otherwise if the `"individual ManagePort Configuration"` resource was created by the SCS/AS and

- if the `"skipUeInquiry"` is set to `"false"`, the SCEF shall interact with the UE via the SGSN/MME to release the port by using RDS protocol as specified in 3GPP TS 24.250 [31] and return 202 Accept to the SCS/AS if successful response is received from the SGSN/MME. Then upon receipt of the UE response, the SCEF shall notify the SCS/AS with the currently reserved ports as specified in clause 4.4.5.6.2.
- if the `"skipUeInquiry"` is set to `"true"`, the SCEF shall delete the `"individual ManagePort Configuration"` resource and respond with an HTTP 204 No Content response to the SCS/AS. The SCEF shall also notify the UE by using RDS protocol as specified in 3GPP TS 24.250 [31].

If the HTTP DELETE request is received for the `"Individual ManagePort Configuration"` resource which was created by the UE, the SCEF shall reject the message with a 403 Forbidden response with a cause value `"OPERATION_PROHIBITED"` in the `"cause"` attribute of the `"ProblemDetails"` data structure.

If the `"skipUeInquiry"` is set to `"false"` and the SCEF is not able to interact with the UE because:

- PDN connection is not established, the SCEF shall reject the HTTP PUT/DELETE request with a 500 Internal Server Error response with a cause value "NO\_PDN\_CONNECTION";
- UE is not reachable, the SCEF shall reject the HTTP PUT/DELETE request with a 500 Internal Server Error response with a cause value "TEMPORARILY\_NOT\_REACHABLE". The response may include a Requested Re-Transmission time to indicate the SCS/AS when the UE is expected to be reachable so that the SCS/AS may prepare any re-configuration for the RDS port; or
- the interaction with the SGSN/MME is not successful, the SCEF shall reject the HTTP PUT/DELETE request with a 500 Internal Server Error and a proper cause value indicating the reason for the delivery failure.

If the SCS/AS needs to read the port numbers and serialization formats that are associated with an application, the SCS/AS shall send an HTTP GET message to the SCEF, using the URI received in the response to the request that has created the NIDD configuration resource and the specific part of "/rds-ports/{portId}" as described in clause 5.6.3.9.2.

#### 4.4.5.6.2 Port Notification

If the SCEF needs to send the information about reserved ports and their configuration to the SCS/AS (e.g. due to 3GPP network created or released "individual ManagePort Configuration" resource upon UE triggered RDS port management procedures as specified in 3GPP TS 24.250 [31]), the SCEF shall send an HTTP POST message to the SCS/AS, using the URI received within the "notificationDestination" attribute in the NiddConfiguration resource. The body of the message is encoded in JSON format with the data structure defined in table 5.6.2.1.9-1. The SCS/AS shall acknowledge the HTTP POST request with an HTTP 200 OK or 204 No Content response.

### 4.4.6 Procedures for Device Triggering

The procedures are used by the SCS/AS to deliver the device trigger via T8 interface.

In order to create a new device trigger, the SCS/AS shall send an HTTP POST message to the SCEF for the "Device Triggering Transactions" resource. The body of the HTTP POST message shall include the External Identifier or MSISDN, validity period, priority, Application Port ID and trigger payload.

Upon receipt of the corresponding HTTP POST message, the SCEF shall check if the SCS/AS is authorised to send a trigger request and if the SCS/AS has exceeded its quota or rate of trigger submission. The SCEF shall also resolve the External Identifier or MSISDN to IMSI and retrieve the "Routing Information" from HSS for the triggering delivery. If the authorisation check fails, or if the quota or rate of trigger submission was exceeded, or if there is no valid subscription information or if the "Routing Information" cannot be found, then the SCEF shall reject the request with an error message to the SCS/AS. Otherwise, the SCEF shall perform the device trigger procedure over Tsp as defined in 3GPP TS 29.368 [24] and T4 as defined in 3GPP TS 29.337 [25]. Upon completion of this procedure, the SCEF shall create a resource "Individual Device Triggering Transaction" which represents the triggering transaction, addressed by a URI that contains the SCS/AS identity and an SCEF-created transaction identifier, and shall respond to the SCS/AS with a 201 Created message, including the trigger and a Location header field containing the URI for the created resource. The SCS/AS shall use the URI received in the Location header in subsequent requests to the SCEF to refer to this device triggering transaction.

In order to replace an existing device trigger, the SCS/AS shall send an HTTP PUT message to the SCEF for the "Individual Device Triggering Transaction" resource, using the URI received in the response to the request that has created the device triggering transaction resource. The body of the HTTP PUT message shall include the DeviceTriggering data structure containing the requested updates. The properties "msisdn" or "externalId" shall remain unchanged from the previously provided value.

If the "PatchUpdate" feature defined in clause 5.7.4 is supported, in order to partially modify an existing Individual Device Triggering Transaction resource, the SCS/AS shall send an HTTP PATCH message to the SCEF targeting the concerned "Individual Device Triggering Transaction" resource, using the URI received in the response to the request that has created the concerned Individual Device Triggering Transaction resource. The body of the HTTP PATCH message shall include the DeviceTriggeringPatch data structure containing the requested modifications.

After receiving the corresponding HTTP PUT / HTTP PATCH message from the SCS/AS, the SCEF shall check if the SCS/AS is authorised to replace/modify an existing device trigger and if the SCS/AS has not exceeded its quota or rate of trigger submission. If any of these checks fail, then the SCEF shall reject the message with a corresponding failure code as described in clause 5.2.6. Otherwise, the SCEF shall replace the device triggering with the SMS-SC by performing the device trigger replace procedure over Tsp as defined in 3GPP TS 29.368 [24] and T4 as defined in 3GPP TS 29.337 [25]. Upon completion of this procedure, the SCEF shall send an HTTP response to the SCS/AS with

a "200 OK" status code and include the result in the body of the HTTP response or a "204 No Content" status code to indicate a successful trigger replacement/modification; otherwise, the SCEF shall send a corresponding failure code as described in clause 5.2.6.

In order to recall an existing device trigger, the SCS/AS shall send an HTTP DELETE message to the SCEF for the "Individual Device Triggering Transaction" resource, using the URI received in the response to the request that has created the device triggering transaction resource.

After receiving the corresponding HTTP DELETE message from the SCS/AS, the SCEF shall check if the SCS/AS is authorised to send a recall trigger request and if the SCS/AS has not exceeded its quota or rate of trigger submission. The SCEF shall also check if the device triggering transaction resource referenced by the URI exists. If any of these checks fail, then the SCEF shall reject the message with an error. Otherwise, the SCEF shall recall the device triggering with the SMS-SC by performing the device trigger recall procedure over Tsp as defined in 3GPP TS 29.368 [24] and T4 as defined in 3GPP TS 29.337 [25]. Upon completion of this procedure, the SCEF shall send an HTTP response to the SCS/AS to indicate trigger recall success or failure.

When it receives the Message Delivery Report from the SMS/SC, the SCEF shall send an HTTP POST message to the SCS/AS to report the trigger delivery result. The body of the HTTP POST message shall include the identifier if the transaction and cause. The SCS/AS shall respond with an HTTP 200 OK or 204 No Content response.

## 4.4.7 Procedures for Group Message Delivery

### 4.4.7.1 General

This procedure is used by an SCS/AS to deliver a payload to a group of UEs. Two methods of Group Message Delivery via the T8 are specified:

- Group Message Delivery via MBMS which is intended to efficiently distribute the same content to the members of a group that are located in a particular geographical area when MBMS is used. This method further includes two varieties:
  - the MB2 interface (see stage 2 in 3GPP TS 23.468 [55] and stage 3 in 3GPP TS 29.468 [36]) is used as southbound interface;
  - the xMB interface (see stage 2 in 3GPP TS 26.348 [56] and stage 3 in 3GPP TS 29.116 [37]) is used as southbound interface.
- Group Message Delivery via unicast MT NIDD for UEs which are part of the same External Group Identifier.

NOTE: Group Message Delivery via MT NIDD is defined in clause 4.4.5.3.2.

Error handling for the procedures in the subsequent clauses shall be handled based on clause 5.2.6.

### 4.4.7.2 Group Message Delivery via MBMS

#### 4.4.7.2.1 General

This procedure is used by an SCS/AS to deliver a payload to a group of UEs via the T8 interface. The SCEF use the Group Message Delivery via MBMS to efficiently distribute the same content to the members of a group that are located in a particular geographical area when MBMS is used.

The procedure of Group message Delivery via MBMS and MB2 used as southbound interface is described in clause 4.4.7.2.2 and the procedure of Group message Delivery via MBMS and xMB used as southbound interface is described in clause 4.4.7.2.3.

#### 4.4.7.2.2 Group Message Delivery via MBMS by MB2

##### 4.4.7.2.2.1 TMGI Allocation

If the SCS/AS acts as a GCS AS in the application level and if there is no assigned TMGI for an External Group Identifier, the SCS/AS shall send an HTTP message to the SCEF to the resource "TMGI Allocation". The body of the

HTTP POST request message shall include the External Group Identifier. The SCS/AS may also include the location information in the body.

Upon receipt of the HTTP POST request from the SCS/AS to allocate a TMGI, the SCEF shall check whether the SCS/AS is authorized to request TMGI allocation. If authorization is successful, the SCEF shall initiate TMGI allocation by the BM-SC as defined in clause 5.2.1 of 3GPP TS 29.468 [36]. Upon successful allocation of a TMGI, the SCEF shall create the resource which represents the TMGI allocation, addressed by a URI that contains the SCS identity and TMGI, and shall respond to the SCS/AS with a 201 Created message including the TMGI and the TMGI expiration time.

In order to renew the TMGI expiration time, the SCS/AS shall send an HTTP PUT or PATCH message to the SCEF to the resource "Individual TMGI Allocation". Upon receipt of the HTTP PUT or PATCH request from the SCS/AS to renew TMGI expiration time, the SCEF shall initiate TMGI expiration time renewal to the BM-SC as defined in clause 5.2.1 of 3GPP TS 29.468 [36]. Upon successful result, the SCEF shall update the resource and respond to the SCS/AS by sending an HTTP response with 200 OK including the new TMGI expiration time or 204 No Content if the required TMGI expiration time renewal is successful with no content in the HTTP PUT or PATCH response message body.

If the SCEF receives the response with an error code from the BM-SC for the allocation of TMGI or renewal of expiration time for the existing TMGI, the SCEF shall not create or update the resource and shall respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

Upon the TMGI expiration, the SCEF may delete the resource of the TMGI locally.

Upon receipt of the notification of TMGI expiration by the BM-SC as defined in clause 5.2.3 of 3GPP TS 29.468 [36], the SCEF shall delete the resource if not yet deleted.

#### 4.4.7.2.2.2 TMGI Deallocation

In order to deallocate the TMGI, the SCS/AS shall send an HTTP DELETE message to the SCEF to the resource "Individual TMGI Allocation". Upon receipt of the HTTP DELETE request from the SCS/AS to deallocate the TMGI, the SCEF shall initiate TMGI deallocation by the BM-SC as defined in clause 5.2.2 of 3GPP TS 29.468 [36]. Upon successful deallocation of a TMGI, the SCEF shall delete the resource "Individual TMGI Allocation" together with all sub-resources "GMD via MBMS by MB2" if available, and shall respond to the SCS/AS by sending an HTTP response with 204 No Content.

#### 4.4.7.2.2.3 Creation of group message delivery

If the SCS/AS acts as a GCS AS in the application level and if the SCS/AS has an assigned TMGI for the External Group Identifier, in order to perform the group message delivery, the SCS/AS shall send an HTTP POST request message to the SCEF to the resource "GMD via MBMS by MB2". The body of the HTTP POST request message shall include the External Group Identifier and notification destination URI identifying the recipient of notification within the "notificationDestination" attribute. The SCS/AS may also include the Group Message Payload, the location information and a Message Delivery Start Time in the body.

The SCS/AS may also send an HTTP POST message to the SCEF directly to the resource "TMGI Allocation" without previously requesting TMGI allocation as defined in clause 4.4.7.2.2. The SCEF shall create the resource "Individual TMGI Allocation" and perform the procedure as defined in clause 4.4.7.2.2, and shall also create resource "GMD via MBMS by MB2" and perform the procedure as mentioned in this subclause for MBMS bearer creation.

Upon receipt of the HTTP POST request from the SCS/AS to deliver the group message, the SCEF shall check whether the SCS/AS is authorized to send a group message request. It also checks to see if the Message Delivery Start Time does not start after the TMGI expiration. If authorization is successful, the SCEF shall initiate the Active MBMS Bearer procedure as defined in clause 5.3.2 of 3GPP TS 29.468 [36] with the difference that the SCEF acts as a GCS AS. The SCEF shall include the location information based on the local configuration if the location information is not provided in the HTTP POST request message.

Upon successful activation of MBMS bearer, the SCEF shall create resource which represents "Individual GMD via MBMS by MB2", addressed by a URI that contains Transaction Id allocated by the SCEF and respond to the SCS/AS by sending an HTTP response with a 201 Created status code, including a Location header field containing the URI for the created resource. When the SCS/AS receives the URI in the Location header, it shall use this URI in subsequent requests to the SCEF to refer to this active MBMS bearer. If the Group Message Payload was not included in the HTTP

POST above, the HTTP response sent from the SCEF shall also include the SCEF message delivery Ipv4 address or Ipv6 address and port number.

If the SCEF receives the response with an error code from the BM-SC for the activation of MBMS bearer, the SCEF shall not create the resource and shall respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

If the Group Message Payload was included the HTTP POST above, the SCEF shall deliver to BM-SC the Group Message Payload(s) as defined in 3GPP TS 29.468 [36] at Message Delivery Start Time.

If the Group Message Payload was not include in the HTTP POST above, the SCEF shall transfer the contents received from the SCS/AS to the BM-CS at or after the requested Group Message Start Time, but before the TMGI Expiration time. In this case, when the SCEF detects the group message delivery was triggered successful, the SCEF shall send an HTTP POST request message to the SCS/AS.

NOTE: If Group Message Payload was included, then at Message Delivery Start Time, the SCEF delivers to BM-SC the Group Message Payload(s) to corresponding to MB2-U IP address and port number associated with respective TMGI.

#### 4.4.7.2.2.4 Modification of previous submitted group message delivery

If the SCS/AS determines that modification of previous accepted Group Message Delivery Request is required, the SCS/AS shall send an HTTP PATCH or HTTP PUT request message to the SCEF to the resource "Individual GMD via MBMS by MB2". The body of the HTTP PATCH request message shall include the Message Delivery Start Time. The SCS/AS may also include the External Group Identifier, the Group Message Payload and the location information in the body. The body of the HTTP PUT request message shall include the information as the information provided in the HTTP POST in clause 4.4.7.2.2.3. The body of the HTTP PATCH request message shall include the information defined in the data type of GMDViaMBMSByMb2Patch as defined in clause 5.8.2.1.1.6.

Upon receipt of the HTTP PATCH or HTTP PUT request from the SCS/AS to modify the previous group message delivery subscription, the SCEF shall check whether the SCS/AS is authenticated and authorized to modify the submitted group message delivery. If the authorization is successful, the SCEF shall initiate the Modify MBMS Bearer procedure as defined in clause 5.3.4 of 3GPP TS 29.468 [36] with the difference that the SCEF acts as a GCS AS. The SCEF shall include the location information based on the local configuration if the location information is not provided in the HTTP PATCH or HTTP PUT request message.

Upon successful modification of MBMS bearer, the SCEF shall update the resource and respond to the SCS/AS with a 200 OK success message indicating that previous group message delivery subscription is successfully updated, or 204 No Content if the updates or replacement is successful with no content in the HTTP PATCH or HTTP PUT response message body.

If the SCEF receives the response with an error code from the BM-SC for the modification of MBMS bearer, the SCEF shall not update the resource and shall respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

#### 4.4.7.2.2.5 Cancellation of previous submitted group message delivery

If the SCS/AS determines that deletion of previous accepted Group Message Delivery Request is required, the SCS/AS shall send an HTTP DELETE request message to the SCEF.

Upon receipt of the HTTP DELETE request from the SCS/AS to delete the previous group message delivery, the SCEF shall check whether the SCS/AS is authenticated and authorized to delete an existing group message delivery subscription. If the authorization is successful, the SCEF shall initiate the Delete MBMS Bearer procedure as defined in clause 5.3.3 of 3GPP TS 29.468 [36] with the difference that the SCEF acts as a GCS AS.

Upon successful deletion of MBMS bearer, the SCEF shall respond to the SCS/AS with a 204 No Content message indicating that submitted group message delivery is successfully deleted.

#### 4.4.7.2.3 Group message Delivery via MBMS by xMB

##### 4.4.7.2.3.1 Service Creation

If the SCS/AS acts as a content provider in the application level and if there is no assigned Service ID for an External Group Identifier, the SCS/AS shall send an HTTP POST message to the SCEF to the resource "xMB Services". The body of the HTTP POST request message shall include the External Group Identifier.

Upon receipt of the HTTP POST request from the SCS/AS to create a service, the SCEF shall check whether the SCS/AS is authorized to request service creation. If authorization is successful, the SCEF shall initiate service creation by the BM-SC as defined in clause 5.2.1.2.2 of 3GPP TS 29.116 [37]. Upon successful service creation, the SCEF shall create the resource which represents the service creation, addressed by a URI that contains the SCS identity and Service Id, and shall respond to the SCS/AS with a 201 Created message which may include the service announcement information.

If the SCEF receives the response with an error status code from the BM-SC for the service creation, the SCEF shall not create or update the resource and shall respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

##### 4.4.7.2.3.2 Service Deletion

In order to delete the service, the SCS/AS shall send an HTTP DELETE message to the SCEF to the resource "Individual xMB Service". Upon receipt of the HTTP DELETE request from the SCS/AS to delete the service, the SCEF shall initiate service deletion by the BM-SC as defined in clause 5.2.1.2.4 of 3GPP TS 29.116 [37]. Upon successful deletion of a service, the SCEF shall delete the resource "Individual xMB Service" together with all sub-resources "GMD via MBMS by xMB" if available, and shall respond to the SCS/AS by sending an HTTP response with 204 No Content.

##### 4.4.7.2.3.3 Creation of group message delivery

If the SCS/AS acts as a content provider in the application level, the SCS/AS may send an HTTP POST request message to the SCEF to the resource "GMD via MBMS by xMB". The body of the HTTP POST request message shall include the External Group Identifier and notification destination URI identifying the recipient of notification within the "notificationDestination" attribute. The SCS/AS may also include the Group Message Payload, the location information, a Message Delivery Start Time and Message Delivery Stop Time in the body.

Upon receipt of the HTTP POST request from the SCS/AS to deliver the group message, the SCEF shall check whether the SCS/AS is authorized to send a group message request. It also checks to see if the Message Delivery Start Time doesn't start after the Message Delivery Stop Time. If authorization is successful, the SCEF shall initiate the Create Session procedure as defined in clause 4.4.5.2 of 3GPP TS 29.116 [37] and the Update Session procedure as defined in clause 4.4.5.3 of 3GPP TS 29.116 [37] with the difference that the SCEF acts as a Content Provider, Session Start is set according to the Message Delivery Start Time and the Session Stop is set according to the Message Delivery Stop Time. The SCEF shall include the location information based on the local configuration if the location information is not provided and include the session type set to "Files" in the HTTP POST request message.

Upon successful activation of MBMS bearer, the SCEF shall create resource which represents "Individual GMD via MBMS by xMB", addressed by a URI that contains Transaction Id allocated by the SCEF and respond to the SCS/AS by sending an HTTP response with a 201 Created status code, including a Location header field containing the URI for the created resource. When the SCS/AS receives the URI in the Location header, it shall use this URI in subsequent requests to the SCEF to refer to this active MBMS bearer. If the Group Message Payload was not included in the HTTP POST above, the HTTP response sent from the SCEF shall also include the SCEF message delivery Ipv4 address or Ipv6 address and port number.

If the SCEF receives the response with an error code from the BM-SC for the activation of MBMS bearer, the SCEF shall not create the resource and shall respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

If the Group Message Payload was included in the HTTP POST above, the SCEF shall deliver to BM-SC the Group Message Payload(s) as defined in 3GPP TS 29.468 [36] at Message Delivery Start Time.

If the Group Message Payload was not included in the HTTP POST above, the SCEF shall transfer the contents received from the SCS/AS to the BM-SC at or after the requested Message Delivery Start Time, but before the Message

Delivery Stop Time. In this case, when the SCEF detects the group message delivery was triggered successful, the SCEF shall send an HTTP POST request message to the SCS/AS.

#### 4.4.7.2.3.4 Modification of previous submitted group message delivery

If the SCS/AS determines that modification of previous accepted Group Message Delivery Request is required, the SCS/AS shall send an HTTP PATCH or HTTP PUT request message to the SCEF to the resource "Individual GMD via MBMS by xMB ". The body of the HTTP PATCH request message shall include the Message Delivery Start Time and Message Delivery Stop Time. The SCS/AS may also include the External Group Identifier, the Group Message Payload and the location information in the body. The body of the HTTP PUT request message shall include the information as the information provided in the HTTP POST in clause 4.4.7.2.3.3. The body of the HTTP PATCH request message shall include the information defined in the data type of GMDViaMBMSByxMBPatch as defined in clause 5.8.3.1.1.4.

Upon receipt of the HTTP PATCH or HTTP PUT request from the SCS/AS to modify the previous group message delivery subscription, the SCEF shall check whether the SCS/AS is authenticated and authorized to modify the submitted group message delivery. If the authorization is successful, the SCEF shall initiate the Update Session procedure as defined in clause 4.4.5.3 of 3GPP TS 29.116 [37] with the difference that the SCEF acts as a Content Provider, Session Start is set according to the Message Delivery Start Time and the Session Stop is set according to the Message Delivery Stop Time. The SCEF shall include the location information based on the local configuration if the location information is not provided in the HTTP PATCH or HTTP PUT request message.

Upon successful modification of MBMS bearer, the SCEF shall respond to the SCS/AS with a 200 OK success message indicating that previous group message delivery subscription is successfully updated or with a 204 No Content success message if no content in the HTTP PUT or PATCH response message body.

If the SCEF receives the response with an error code from the BM-SC for the modification of MBMS bearer, the SCEF shall not update the resource and shall respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

#### 4.4.7.2.3.5 Cancellation of previous submitted group message delivery

If the SCS/AS determines that deletion of previous accepted Group Message Delivery Request is required, the SCS/AS shall send an HTTP DELETE request message to the SCEF.

Upon receipt of the HTTP DELETE request from the SCS/AS to delete the previous group message delivery, the SCEF shall check whether the SCS/AS is authenticated and authorized to delete an existing group message delivery subscription. If the authorization is successful, the SCEF shall initiate the Delete Session procedure as defined in clause 4.4.5.4 of 3GPP TS 29.116 [37] with the difference that the SCEF acts as a Content Provider.

Upon successful deletion of MBMS bearer, the SCEF shall respond to the SCS/AS with a 204 No Content message indicating that submitted group message delivery is successfully deleted.

## 4.4.8 Procedures for Reporting of Network Status

### 4.4.8.1 General

These procedures are used by an SCS/AS to perform reporting of network status via the T8 interface in one time or continuous reporting cases. The SCEF uses the reporting procedures based on the network status information from one or more RCAF(s). These procedures can also be used by the SCS/AS to indicate the removal of a previously subscribed reporting request.

### 4.4.8.2 Network Status Reporting Subscription

In order to create a new subscription to request for notifications on network status, the SCS/AS shall send an HTTP POST request message to the SCEF on the "Network Status Reporting Subscriptions" resource. The body of the HTTP POST request shall include a Notification destination address and Location area information, and may include the time duration and threshold(s).

Upon receiving the HTTP POST request message from the SCS/AS, the SCEF shall check:

- if the SCS/AS is authorized to perform the request. If not, the SCEF shall respond to the SCS/AS with an HTTP "401 Unauthorized" status code.

- if the SCS/AS has exceeded its quota of submitting requests. If so the SCEF shall respond to the SCS/AS with an HTTP "403 Forbidden" status code and may indicate the failure reason "QUOTA\_EXCEEDED" (i.e. the quota exceeded) within the "cause" attribute of the ProblemDetails data structure in the HTTP POST response.
- if the SCS/AS has exceeded its rate of submitting requests. If so the SCEF shall respond to the SCS/AS with an HTTP "429 Too Many Requests" status code in the HTTP POST response.

After the SCEF authorized the HTTP request message, the SCEF shall create an "Individual Network Status Reporting Subscription" resource which represents the subscription, addressed by a URI that contains the SCS/AS identity and an SCEF-created subscription identifier, and shall respond to the SCS/AS with an HTTP "201 Created" status code, including a Location header field containing the URI for the created resource, to acknowledge to the SCS/AS the successful subscription creation. The SCS/AS shall use the URI received in the Location header in subsequent requests to the SCEF to refer to this network status reporting subscription. Then, the SCEF shall trigger the network status reporting procedure with the RCAF over Ns interface as defined in 3GPP TS 29.153 [30].

In order to update an existing subscription of continuous network status reporting, the SCS/AS shall send an HTTP PUT request message to the SCEF on the "Individual Network Status Reporting Subscription" resource, using the URI received in the response to the request that has created the network status reporting subscription resource. After receiving the HTTP PUT request message, the SCEF shall send an HTTP PUT response to the SCS/AS with an HTTP "200 OK" status code including a representation of the updated "Individual Network Status Reporting Subscription" resource in the response body, or a "204 No Content" status code. Then, the SCEF shall apply the requested updates and interact with the RCAF as defined in 3GPP TS 29.153 [30].

If the "PatchUpdate" feature defined in clause 5.9.4 is supported, in order to partially modify an existing subscription of continuous network status reporting, the SCS/AS shall send an HTTP PATCH request message to the SCEF on the "Individual Network Status Reporting Subscription" resource, using the URI received in the response to the request that has created the network status reporting subscription resource. The request body shall contain the NetStatusRepSubsPatch data structure including only the attributes that shall be updated. After receiving the HTTP PATCH request message, the SCEF shall send an HTTP response to the SCS/AS with an HTTP "200 OK" status code including a representation of the modified "Individual Network Status Reporting Subscription" resource in the response body, or a "204 No Content" status code. Then, the SCEF shall apply the requested changes and interact with the RCAF as defined in 3GPP TS 29.153 [30].

NOTE: In order to update an existing subscription, the SCEF needs to send a cancellation to the previously associated RCAF(s) to remove the related SCEF instructions and then send a new request with updated parameters.

In order to remove an existing subscription of continuous network status reporting, the SCS/AS shall send an HTTP DELETE request message to the SCEF on the "Individual Network Status Reporting Subscription" resource, using the URI received in the response to the request that has created the network status reporting subscription resource. Upon reception of the HTTP DELETE request message, the SCEF shall send an HTTP DELETE response to the SCS/AS with an HTTP "204 No Content" status code. Then, the SCEF shall interact with the RCAF to terminate the continuous reporting of network status as defined in 3GPP TS 29.153 [30].

#### 4.4.8.3 Network Status Reporting Notification

After receiving reports from all the involved RCAF(s) as defined in 3GPP TS 29.153 [30], the SCEF shall send an HTTP POST message to the SCS/AS using the identified destination URL, which is provided by the SCS/AS during the network status reporting subscription. The body of HTTP POST message shall include the NSI.

#### 4.4.9 Procedures for Communication Pattern Parameters Provisioning

One or more set of CP parameters may be provisioned by the SCS/AS for a single UE or a group of UEs.

In order to create resources for one or more CP parameter set(s), the SCS/AS shall send an HTTP POST message to the SCEF for the "CP Provisioning Subscriptions" resource, including one or more new provisioned CP parameter set(s). The body of HTTP POST message shall include External Identifier or MSISDN for a single UE or External Group ID for a group of UEs, SCS/AS Identifier and one or more set of CP information associated with CP parameter set Id(s).

After receiving the HTTP POST message, the SCEF shall check if the SCS/AS is authorised. The SCEF may also check if the number of CP parameter sets(s) reaches the limitation based on operator policy or configuration.



After validation, the SCEF shall for each received CP parameter set Id, assign an SCEF Reference ID which may be derived from the CP parameter set Id, and send Update CP Parameter Request message to the HSS for delivering the CP parameter set(s) as specified in 3GPP TS 29.336 [11].

After receiving result from the HSS, if the result is successful, the SCEF shall create a resource "Individual CP Provisioning Subscription" and the corresponding sub-resources "Individual CP Set Provisioning" each represents a successfully provisioned CP parameter set indicated by the HSS and respond to the SCS/AS with a "201 Created" including Location header field containing the URI for the created subscription resource "Individual CP Provisioning Subscription" and the sub-resource(s) "Individual CP Set Provisioning" corresponding to each successful CP parameter set within the "self" attribute in the "cpParameterSet" attribute; otherwise, the SCEF shall not create any resource and shall respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6. If not all CP parameter sets are provisioned successfully (i.e. the HSS indicates failure for some or all CP parameter sets and/or the SCEF does not accept the CP parameter provisioning (e.g. one or more CP Set Identifiers in the request are already present in existing subscriptions)), the SCEF shall also include CP report(s) within attribute "cpReports" with a list of failed CP Set Identifier(s) and the corresponding failure code as specified in table 5.10.2.3.5-1 in the body of the HTTP response.

In order to add new CP parameter set(s), update and/or remove the existing CP parameter set(s) for one or more CP parameter set Id(s), the SCS/AS may send an HTTP PUT message to the SCEF for the "Individual CP Provisioning Subscription" resource requesting to add new CP parameter set(s) by creating new resource(s), change some created properties (e.g. Validity Time) of the existing resource(s), and/or remove some or entire properties of the existing resource(s). After receiving the HTTP PUT message, the SCEF shall send the CP parameter changes to the HSS as specified in 3GPP TS 29.336 [11]. After receiving the response from the HSS with a successful code, if the HSS indicates all CP parameter sets or some CP parameter sets are provisioned successfully, the SCEF shall create or update the corresponding sub-resource(s) "Individual CP Set Provisioning" each represents a successfully provisioned CP parameter set indicated by the HSS and send an HTTP response to the SCS/AS with a "200 OK" status code and include a list of successful CP parameter set(s) in the body of the HTTP response, or a "204 No Content" status code. Otherwise, the SCEF shall not create or update the resource(s) and shall send an HTTP response to the SCS/AS with a corresponding failure code as described in clause 5.2.6. If not all CP parameter sets are provisioned successfully (i.e. the HSS indicates failure for some or all CP parameter sets and/or the SCEF does not accept the CP parameter provisioning (e.g. one or more CP Set Identifiers in the request are already present in existing subscriptions)), the SCEF shall also include CP report(s) within attribute "cpReports" with a list of failed CP Set Identifier(s) and the corresponding failure code as specified in table 5.10.2.3.5-1 in the body of the HTTP response.

The SCS/AS may send a HTTP PUT message to the SCEF for the "Individual CP Set Provisioning" resource requesting to replace an individual resource identified by the CP parameter set Id. The body of the HTTP PUT message shall include set of CP information. After receiving such request, the SCEF shall interact with the HSS as specified in 3GPP TS 29.336 [11]. After receiving the response from the HSS with a successful code, the SCEF shall update the resource and send an HTTP response to the SCS/AS with a "200 OK" status code or a "204 No Content" status code; otherwise, the SCEF shall not update the resource and shall send an HTTP response to the SCS/AS with a corresponding failure code as described in clause 5.2.6. If the provisioning of the CP set fails (i.e. the HSS returns failure for the CP set or the SCEF does not accept the CP set provisioning), the SCEF shall reject the request with a corresponding status code, and include the attribute "cpReports" with the corresponding failure code as specified in table 5.10.2.3.5-1 and the CP Set Identifier for which the provisioning has failed.

The SCS/AS may send an HTTP DELETE message to the SCEF requesting to delete an individual CP set resource "Individual CP Set Provisioning". After receiving such request, the SCEF shall determine the SCEF Reference ID for Deletion associated with the CP parameter set Id, and interact with the HSS as specified in 3GPP TS 29.336 [11]. After receiving the response from the HSS, the SCEF shall delete the addressed resource and send an HTTP response to the SCS/AS with a "204 No Content" status code.

The SCS/AS may send an HTTP DELETE message to the SCEF requesting to delete an individual subscription resource "Individual CP Provisioning Subscription". After receiving such request, the SCEF shall determine the SCEF Reference ID (s) for Deletion associated with the CP parameter set Id(s) and interact with the HSS as specified in 3GPP TS 29.336 [11]. After receiving the response from the HSS, the SCEF shall delete the addressed resource and its sub-resources addressed by "Individual CP Set Provisioning" and send an HTTP response to the SCS/AS with a "204 No Content" status code.

#### 4.4.10 Procedures for PFD Management

The PFDs associated with application identifier(s) may be created, updated or removed by the third party SCS/AS as defined in 3GPP TS 23.682 [2].

In order to create PFDs resources for one or more external Application Identifier(s), the SCS/AS shall send an HTTP POST message to the request URI of the resource "PFD Management Transactions" including one or more PFD(s) for external Application Identifier(s). The body of the HTTP POST message shall include external Application Identifier(s) and PFDs associated with its PFD Identifier(s), an Allowed Delay may be included for the external Application Identifier(s) as well.

After receiving the HTTP POST message, if the SCS/AS is authorized, the SCEF shall provision the PFDs to the PFDF as defined in 3GPP TS 29.250 [26]. When receiving the response from the PFDF, the SCEF shall send an HTTP response to the SCS/AS with a corresponding status code. If one or more external application identifiers are provisioned successfully, the SCEF shall create an "Individual PFD Management Transaction" resource for the request and he corresponding sub-resources "Individual Application PFD Management" each represents a successfully provisioned external application identifier. The SCEF shall respond to the SCS/AS with a 201 Created including Location header field containing the URI for the created transaction resource "Individual PFD Management Transaction" and the sub-resource(s) "Individual Application PFD Management" corresponding to each external application identifier within the "self" attribute in the "PfdData" data type, the SCEF shall also include PFD report(s) with a list of external Application Identifier(s) and result(s) in the body of the HTTP response if some application(s) are not provisioned successfully (i.e. the PFDF returns failure and/or the SCEF does not accept the PFD provisioning (e.g. one or more external Application Identifiers in the request are already present in existing transactions)).

In order to update the PFDs for an existing individual transaction, the SCS/AS shall send an HTTP PUT message to URI of the resource "Individual PFD Management Transaction" including one or more PFD(s) for external Application Identifier(s). After receiving the HTTP PUT message, the SCEF shall make the change and send the change to the PFDF (i.e. add/update/remove PFDs) as defined in 3GPP TS 29.250 [26]. After receiving the response from the PFDF, the SCEF shall send an HTTP response to the SCS/AS with a corresponding status code. The SCEF shall create or update the corresponding sub-resource(s) "Individual Application PFD Management" each represents a successfully provisioned external application identifier, and also include PFD report(s) with a list of external Application Identifier(s) and result(s) in the body of the HTTP response if some application(s) are not provisioned successfully (i.e. the PFDF returns failure and/or the SCEF does not accept the PFD provisioning (e.g. one or more external Application Identifiers in the request are already present in existing transactions)).

NOTE 1: When the PUT for "Individual PFD Management Transaction" is received in the SCEF, SCEF can use partial update or full update towards the PFDF.

If the "PatchUpdate" feature defined in clause 5.11.4 is supported, in order to partially modify an existing PFD Management Transaction, the SCS/AS shall send an HTTP PATCH request message to the SCEF on the "Individual PFD Management Transaction" resource, using the URI received in the response to the request that has created the concerned PFD Management Transaction resource. The request body shall contain the PfdManagementPatch data structure including only the attributes that shall be updated. After receiving the HTTP PATCH request, the SCEF shall apply the requested modifications and interact with the concerned PFDF to add/update/remove PFD(s) as defined in 3GPP TS 29.250 [26]. After receiving the response of the PFDF, the SCEF shall send an HTTP response to the SCS/AS with a corresponding status code. The SCEF shall then create or update the corresponding "Individual Application PFD Management" sub-resource(s), with each represents a successfully provisioned external application identifier. If some application(s) are not provisioned successfully (i.e. the PFDF returns a failure and/or the SCEF does not accept the PFD provisioning (e.g. one or more external Application Identifiers in the request are already present in existing transactions)), the SCEF shall also include PFD report(s) containing a list of external Application Identifier(s) and result(s) in the body of the HTTP response.

In order to update the PFDs for an existing external Application Identifier, the SCS/AS shall send an HTTP PUT message to the resource "Individual Application PFD Management" to update the full set of PFD(s) of an existing resource. After receiving the HTTP PUT message, the SCEF shall make the change and send the change to the PFDF (i.e. add/update/remove PFDs) as defined in 3GPP TS 29.250 [26]. After receiving the response from the PFDF, the SCEF shall send an HTTP response to the SCS/AS with a corresponding status code.

For the POST message to the resource "PFD Management Transactions" or the PUT message to the resource "Individual PFD Management Transaction", if the provisioning of all application(s) fails (i.e. the PFDF returns failure and/or the SCEF does not accept the PFD provisioning), the SCEF shall respond with 500 Internal Server Error status code, and include the attribute "pfdReports" with the corresponding failure reason as specified in table 5.11.2.2.3-1 and the external Application Identifier(s) for which the provisioning has failed.

In order to update the PFDs for an existing external Application Identifier, the SCS/AS shall send an HTTP PUT message to the resource "Individual Application PFD Management" to update the full set of PFDs of an existing resource. After receiving the HTTP PUT message, the SCEF shall make the change and send the change to the PFDF

(i.e. add/update/remove PFDs) as defined in 3GPP TS 29.250 [26]. After receiving the response from the PFDF, the SCEF shall send an HTTP response to the SCS/AS with a corresponding status code.

NOTE 2: When the PUT for "Individual Application PFD Management" is received in the SCEF, SCEF can use partial update or full update towards the PFDF.

In order to update the PFDs for an existing external Application Identifier, the SCS/AS may also send an HTTP PATCH message to URI of the resource "Individual Application PFD Management" to partially update PFDs. After receiving the HTTP PATCH message, the SCEF shall make the change and send the change to the PFDF (i.e. add/update/remove PFDs) as defined in 3GPP TS 29.250 [26]. After receiving the response from the PFDF, the SCEF shall send an HTTP response to the SCS/AS with a corresponding status code.

In order to remove the PFDs for an existing individual application, the SCS/AS shall send an HTTP DELETE message to the resource "Individual Application PFD Management". After receiving such request, the SCEF shall delete the resource and interact with the PFDF as defined in 3GPP TS 29.250 [26]. After receiving the response from the PFDF, the SCEF shall send an HTTP response to the SCS/AS with a corresponding status code.

For the PUT/PATCH message to the resource "Individual Application PFD Management", if the provisioning of the application fails (i.e. the PFDF returns failure or the SCEF does not accept the PFD provisioning), the SCEF shall reject the request with a corresponding status code, and include the attribute "pfdReports" with the corresponding failure code as specified in table 5.11.2.2.3-1 and the external Application Identifier for which the provisioning has failed.

If the SCEF receives PFD management notification including the PFD failure report from the PFDF (as defined in 3GPP TS 29.250 [26]) and if the feature PfdMgmtNotification is supported, the SCEF shall notify the SCS/AS with an HTTP POST message, identified by the notification destination URI received during the PFD provisioning, to notify the failure result for the PFD management by including the PfdReport data type in the body of the message. Within the PfdReport data type, the SCEF shall include the impacted application id(s) within the "externalAppIds" attribute, the "failureCode" attribute set to "PARTIAL\_FAILURE". In addition, if the SCEF receives the location area(s) of PCEF/TDF(s) which are unable to enforce the PFD(s) from the PFDF, the SCEF shall include the location area(s) within the "locationArea" attribute of the PFD report(s). After receiving the HTTP POST message, the SCS/AS shall send a HTTP response with "204 No Content" status code.

NOTE 3: How the SCS/AS reacts to the failed PFD provisioning is left to implementation.

NOTE 4: The SCEF maps the 3GPP network area(s) to the geographic area(s) or civic address(es) if the 3GPP network area(s) is not allowed to be exposed to the 3rd party according to the operator policy.

#### 4.4.11 Procedures for Enhanced Coverage Restriction Control

The procedures are used by an SCS/AS to query the status of, or to configure the enhanced coverage restriction for a UE via the T8 interface as defined in 3GPP TS 23.682 [2].

In order to query the current status of enhanced coverage restriction, the SCS/AS shall send an HTTP POST message to the SCEF using the query custom operation as defined in clause 5.12.13.2. The body of the HTTP POST message shall include External Identifier or MSISDN.

In order to configure the enhanced coverage restriction, the SCS/AS shall send an HTTP POST message to the SCEF using the configure custom operation as defined in clause 5.12.13.3. The body of the HTTP POST message shall include External Identifier or MSISDN and the Enhanced Coverage Restriction setting (i.e. allowed-PLMN-List or restricted-PLMN-List).

Upon receiving the HTTP POST message from the SCS/AS, the SCEF shall check:

- if the SCS/AS is authorized to perform the request. If not the SCEF shall respond to the SCS/AS with a status code set to 401 Unauthorized.
- if the request is malformed. If it is malformed, the SCEF shall respond to the SCS/AS with a status code set to 400 Bad Request.
- if the SCS/AS has exceeded its quota of submitting requests. If so the SCEF shall respond to the SCS/AS with a status code set to 403 Forbidden and may indicate the failure reason "QUOTA\_EXCEEDED" (i.e. the quota exceeded) within the "cause" attribute of the "ProblemDetails" structure in the HTTP POST response.

- if the SCS/AS has exceeded its rate of submitting requests. If so the SCEF shall respond to the SCS/AS with a status code set to 429 Too Many Requests in the HTTP POST response.

The SCEF shall send a Configuration Information Request to the HSS to query or configure the setting of Enhanced Coverage Restriction as defined in 3GPP TS 29.336 [11].

Upon receipt of the response from the HSS, the SCEF shall send an HTTP response to the SCS/AS with a 200 OK message for query or configure custom operation and include the Enhanced Coverage Restriction Data from HSS into the HTTP response.

If the SCEF receives a response with an error code from the HSS, the SCEF shall respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

## 4.4.12 Procedures for Network Parameter Configuration

### 4.4.12.1 General

The procedures are used by an SCS/AS to request that the network consider setting the suggested network parameter values which can influence certain aspects of UE/network behaviour. The procedures are applicable for an individual UE or a group of UEs.

In order to create a new network parameter configuration to configure suggested network parameters, the SCS/AS shall send an HTTP POST request message to the SCEF to the resource "NP Configurations". The body of the HTTP request message shall include External Identifier or MSISDN or External Group Identifier, SCS/AS Identifier, and may include Maximum Latency, Maximum Response Time and Suggested Number of Downlink Packets and Group Reporting Guard Time, wherein, the External Identifier or MSISDN indicates the configuration for an individual UE and the External Group Identifier indicates for a group of UEs. If the External Group Identifier is included, the SCS/AS shall provide the Notification Destination Address in the request.

NOTE: The Notification Delivery as described in clause 5.2.5 is not supported for individual UE configuration case.

In order to update an existing Network Parameter Configuration, the SCS/AS may send an HTTP PUT message to the resource "Individual NP Configuration" requesting the SCEF to replace all properties in the existing resource.

The SCS/AS may also use an HTTP PATCH message to request to change some properties in the existing resource.

Upon receipt of the HTTP POST, PUT or PATCH message, if the SCS/AS is authorized to perform the request, the SCEF shall check whether the Maximum Latency, Maximum Response Time and/or Suggested Number of Downlink Packets in the HTTP request body are within the range defined by operator policies, if one or more of these parameters are not within the range, the SCEF shall:

- either reject the request message by sending an HTTP response to the SCS/AS with a status code set to "403 Forbidden", in which it may indicate the "PARAMETER\_OUT\_OF\_RANGE" application error in the "cause" attribute of the "ProblemDetails" data structure and it may also indicate which parameters are out of the range in the "invalidParams" attribute of the "ProblemDetails" structure in the response body; or
- modify the parameters which are not within the range by selecting different values which are in the range.

After validation, the SCEF shall perform the Network Parameter Configuration as described in clause 4.4.12.2 for an individual UE or in clause 4.4.12.3 for a group of UEs.

In order to delete an existing Network Parameter Configuration at the SCEF, the SCS/AS shall send an HTTP DELETE message to the corresponding resource "Individual NP Configuration" at the SCEF. The SCEF shall determine the SCEF Reference ID for deletion and interact with the HSS via S6t as defined in 3GPP TS 29.336 [11]. Upon receipt of the response from the HSS, the SCEF shall delete active resource "Individual NP Configuration" addressed by the URI and send an HTTP response to the SCS/AS with a "204 No Content" status code.

### 4.4.12.2 Configuration Request for an individual UE

If the configuration request from the SCS/AS is for an individual UE, the SCEF shall send the Configuration Information Request command to the HSS via S6t as defined in 3GPP TS 29.336 [11].

Upon receipt of the response from the HSS, the SCEF shall,

- for the HTTP POST message, create a new resource "Individual NP Configuration" addressed by a URI that contains the SCS/AS identifier and an SCEF-created configuration identifier, and send an HTTP POST response to the SCS/AS with "201 Created" status code, the final suggested configuration parameter(s) (if modified), the indication(s) for the discarded parameter(s) (if discarded), and a location header field containing the URI for the created resource.
- for the HTTP PUT or PATCH message, update the active resource "Individual NP Configuration", and send an HTTP response to the SCS/AS with "200 OK" status code, the final suggested network parameter(s) (if modified), the indication(s) for the discarded parameter(s) (if discarded), or a "204 No Content" status code.

If the SCEF receives a response with an error code from the HSS, the SCEF shall not create or update the resource and shall respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

#### 4.4.12.3 Configuration Request for a group of UEs

If the configuration request from the SCS/AS is for a group of UEs, the SCS/AS shall provide the Notification Destination Address, the SCEF shall send the Configuration Information Request command to the HSS via S6t as defined in 3GPP TS 29.336 [11].

Upon receipt of the successful response indicating that group processing is in progress from the HSS before beginning the processing of individual UEs, the SCEF shall,

- for the HTTP POST message, create a resource "Individual NP Configuration" addressed by a URI that contains the SCS/AS identity and an SCEF-created configuration identifier. The SCEF shall send an HTTP POST response to the SCS/AS including a location header field containing the URI for the created resource and a "201 Created" status code to acknowledge the SCS/AS of the successful group processing request.
- for the HTTP PUT or PATCH message, update the resource "Individual NP Configuration" addressed by the requested URL, and shall send "200 OK" status code or a "204 No Content" status code to acknowledge the SCS/AS of the successful group processing request in the HTTP response message.

If the SCEF receives a response with an error code from the HSS, the SCEF shall not create or update the resource and shall respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

Upon receipt of the processing result of the individual UEs from the HSS, the SCEF shall send an HTTP POST request message with a reference to the related network parameter configuration and a list of processing result for the group members to the SCS/AS.

The SCS/AS shall send an HTTP response to acknowledge the SCEF about the handling result of the received request.

#### 4.4.12.4 Notification of applied parameter configuration

If the `Enhanced_param_config` feature is supported and the SCEF receives currently applied parameter configuration from the HSS, the SCEF shall notify the SCS/AS by the HTTP POST message including the parameter changes in the "appliedParam" attribute.

### 4.4.13 Procedures for setting up an AS session with required QoS

This procedure is used to set up an AS session with required QoS for the service as defined in 3GPP TS 23.682 [2].

For initial AS session creation, the SCS/AS shall send an HTTP POST message to the SCEF for the "AS Session with Required QoS Subscriptions" resource. The body of HTTP POST message shall include SCS/AS Identifier, UE IP address, IP Flow description, QoS reference and notification destination address. And it may also include time period and/or traffic volume for sponsored data connectivity purpose. If the feature `AppId` is supported, either the Flow description or an external Application Identifier shall be included.

After receiving the HTTP POST message, the SCEF shall authorize the request and may check if the total number of requested QoS reference has exceeded the limit for the SCS/AS. If the authorization is successful, the SCEF shall map the SCS/AS Identifier to AF Application Identifier if the external Application Identifier is not provided and only one AF Application Identifier is mapped, and if required, map the SCS/AS Identifier to ASP Identity and Sponsor Identity.

NOTE 1: Before the QoS reference is mapped to Rx parameters, the SCEF can perform a mapping from the name space of the 3rd party SCS/AS to the name space of the operator.

NOTE 2: The QoS reference referring to pre-defined QoS information in the SCEF can be mapped to media component descriptions (e.g. bandwidth, media type) according to SLA.

If the authorization performed by the SCEF is successful, then the SCEF shall act as an AF to interact with the PCRF via the Rx interface as defined in 3GPP TS 29.214 [10] or 3GPP TS 29.201 [13] and trigger a PCRF initiated IP-CAN Session Modification. Based on local configuration, the SCEF may also request to be notified about the transmission resource status, i.e. INDICATION\_OF\_SUCCESSFUL\_RESOURCES\_ALLOCATION, INDICATION\_OF\_RELEASE\_OF\_BEARER, INDICATION\_OF\_FAILED\_RESOURCES\_ALLOCATION, and optionally INDICATION\_OF\_LOSS\_OF\_BEARER and INDICATION\_OF\_RECOVERY\_OF\_BEARER. If the time period and/or traffic volume are received from the AF, the SCEF should subscribe to the PCRF on the USAGE\_REPORT event.

If the "enNB" feature is supported, the SCEF may explicitly receive a list of user plane event(s) that the SCS/AS requests to subscribe to. The SCEF shall subscribe to the corresponding PCRF event(s) (e.g. INDICATION\_OF\_SUCCESSFUL\_RESOURCE\_ALLOCATION) for the received event(s) (e.g. SUCCESSFUL\_RESOURCES\_ALLOCATION), except for the SESSION\_TERMINATION event.

NOTE 3: The PCRF does not need explicit subscription in order to notify Rx session termination.

The SCEF, after receiving the AAA message or HTTP 201 Created message over the Rx interface from the PCRF with successful result code, shall create a resource "Individual AS Session with Required QoS Subscription" which represents AS session, addressed by a URI that contains the SCS/AS identity and an SCEF-created AS session identifier, and shall respond to the SCS/AS with a 201 Created message, including the result in the body of the HTTP response and a Location header field containing the URI for the created resource. The SCS/AS shall use the URI received in the Location header in subsequent requests to the SCEF to refer to this AS session. Otherwise, the SCEF shall send an HTTP response to the SCS/AS with a corresponding status code and include the result in the body of the HTTP response. If the SCEF receives a response with an error code from the PCRF, the SCEF shall not create the resource and respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

In order to update the established AS session, the SCS/AS may send an HTTP PUT message to the SCEF for the "Individual AS Session with Required QoS Subscription" resource requesting to replace all properties (e.g. new usage threshold, Flow Description or external Application Identifier) in the existing resource, addressed by the URI received in the response to the request that has created the resource. The UE IP or MAC address shall remain unchanged from previously provided values. After receiving such message, the SCEF shall make the change (e.g. if the usage threshold within the "usageThreshold" attribute is included in the HTTP PUT request and the accumulated usage report for the previously provided usage threshold is not received yet, the SCEF shall completely replace the previously provided one), and interact with the PCRF to modify the Rx session (as defined in 3GPP TS 29.214 [10] or 3GPP TS 29.201 [13]). After receiving the response with successful result code from the PCRF, the SCEF shall replace all properties of the existing resource, send an HTTP response to the SCS/AS with a "200 OK" status code, and include the result in the body of the HTTP response or a "204 No Content" status code. If the SCEF receives a response with an error code from the PCRF, the SCEF shall not update the resource and respond to the SCS/AS with a corresponding failure code as described in clause 5.2.6.

The SCS/AS may also send an HTTP PATCH message to the SCEF for the "Individual AS Session with Required QoS Subscription" resource requesting to change some created properties (e.g. new usage threshold, Flow Description or external Application Identifier, updated list of user plane event(s) if the "enNB" feature is supported). After receiving the HTTP PATCH message, the SCEF shall make the change (e.g. if the usage threshold within the "usageThreshold" attribute is included in the HTTP PATCH request and the accumulated usage report for the previously provided usage threshold is not received yet, the SCEF shall completely replace the previously provided one), and interact with the PCRF to modify the Rx session (as defined in 3GPP TS 29.214 [10] or 3GPP TS 29.201 [13]). After receiving the response from the PCRF, the SCEF shall send an HTTP response to the SCS/AS with a "200 OK" status code and include the result in the body of the HTTP response, or a "204 No Content" status code.

NOTE 4: The SCS/AS can assume a successful resource allocation upon receipt of the POST/PUT/PATCH response, until the FAILED\_RESOURCES\_ALLOCATION event is received.

NOTE 5: The SCS/AS can update the list of user plane event(s) only for one time specific events, i.e. INDICATION\_OF\_SUCCESSFUL\_RESOURCES\_ALLOCATION, INDICATION\_OF\_FAILED\_RESOURCES\_ALLOCATION and USAGE\_REPORT events, as specified in clause 5.3.13 of 3GPP TS 29.214 [10].

If the SCEF receives a traffic plane notification (e.g. the usage threshold is reached or transmission resource lost), or if the SCEF gets informed that the Rx session is terminated (e.g. due to a release of PDN connection), the SCEF shall send an HTTP POST message including the notified event (e.g. session terminated) and the accumulated usage (if received from the PCRF) to the callback URI "notificationUri" provided by the SCS/AS during the creation of individual AS Session with Required QoS Subscription. The SCS/AS shall respond with an HTTP response to confirm the received notification.

In order to remove the established AS session, the SCS/AS shall send an HTTP DELETE message to the SCEF for the "Individual AS Session with Required QoS Subscription" resource. After receiving the HTTP DELETE message, the SCEF shall remove all properties and interact with the PCRF to terminate the Rx session (as defined in 3GPP TS 29.214 [10] or 3GPP TS 29.201 [13]). After receiving the response from the PCRF, the SCEF shall send an HTTP response to the SCS/AS with a corresponding status code and include the accumulated usage (if received from the PCRF).

## 4.4.14 Procedures for MSISDN-less Mobile Originated SMS

### 4.4.14.1 General

The procedures are used by the SCEF to send the MSISDN-less MO-SMS to the SCS/AS via T8 interface.

### 4.4.14.2 Delivery of MSISDN-less MO SMS

If the SCEF receives an MSISDN-less MO-SMS via T4 including an destination SME address (long/short code of the SCS/AS), the SCEF will use the IMSI of the UE and application port ID received over T4 to query the HSS/HLR for an external ID, and the SCEF shall then determine the notification destination URL of an SCS/AS based on configured information on the mapping of SME addresses to destination URLs. The SCEF shall send to the determined destination URL an HTTP POST request that shall include an MsisdnLessMoSmsNotification data type with:

- the short message transfer protocol data unit as received on the T4 interface.
- the Application Port as received on the T4 interface, and
- the external identifier of the UE that send the SMS, as received from the HSS/HLR.

NOTE: The Notification Delivery using Websocket (see clause 5.2.5.4) and the Notification Test Event (see clause 5.2.5.3) are not supported for the present API.

## 4.4.15 Procedures for RACS Parameter Provisioning

The procedures are used by an SCS/AS to request that the network to provision manufacturer specific UE radio capability information.

In order to create a new parameter provisioning, the SCS/AS shall send an HTTP POST request message to the SCEF to the resource "RACS Parameter Provisionings". The body of the HTTP POST request message shall include a list of RACS IDs, and for each provided RACS ID, its radio capability parameters and the related UE model(s) IMEI-TAC value(s).

In order to fully replace an existing RACS Parameter Provisioning, the SCS/AS may send an HTTP PUT message to the resource "Individual RACS Parameter Provisioning" requesting the SCEF to change all properties in the existing resource. The body of the HTTP PUT request message shall include a list of RACS IDs, and for each provided RACS ID, its radio capability parameters and the related UE model(s) IMEI-TAC value(s).

In order to partial update an existing RACS Parameter Provisioning, the SCS/AS may send an HTTP PATCH message to the resource "Individual RACS Parameter Provisioning" requesting the SCEF to change some properties in the existing resource.

Upon receipt of the HTTP POST, PUT or PATCH message, if the SCS/AS is authorized to perform the request, the SCEF shall interact with the UCMF as described in 3GPP TS 29.675 [61]. After receiving the response from the UCMF, if at least one RACS ID is successfully provisioned, the SCEF shall create or update the resource "Individual RACS Parameter Provisioning" and respond with 201 Created or 200 OK to the SCS/AS respectively with the successfully provisioned RACS information or 204 No Content if the updates or replacement is successful with no content in the PATCH or PUT response message body, the SCEF may include RACS report(s) within attribute

"racReports" with a list of RACS ID(s) and the corresponding failure code for which the provisioning has failed as specified in table 5.16.2.2.3-1 in the body of the HTTP response. Otherwise, the SCEF shall send an HTTP response to the SCS/AS with a corresponding failure code as described in clause 5.16.5. If all the RACS IDs failed to be provisioned successfully, the SCEF may send a "500 Internal Server Error" HTTP response and may include in the response body failure reports as specified in clause 5.16.3.

In order to delete an existing RACS Parameter Provisioning at the SCEF, the SCS/AS shall send an HTTP DELETE message to the corresponding resource "Individual RACS Parameter Provisioning" at the SCEF. Upon receipt of the DELETE request message, the SCEF shall interact with the UCMF as described in 3GPP TS 29.675 [61]. After receiving the response from the UCMF, the SCEF shall remove the resource and respond with 204 No Content to the SCS/AS.

---

## 5 T8 APIs

### 5.1 Introduction

The T8 APIs are a set of APIs defining the related procedures and resources for the interaction between the SCEF and the SCS/AS.

Tables 5.1-1 summarizes the APIs defined in this specification.



Table 5.1-1: API Descriptions

Service Name	Clause defined	Description	OpenAPI Specification File	API Name	Annex
MonitoringEvent	5.3	Event Monitoring API	TS29122_MonitoringEvent.yaml	3gpp-monitoring-event	A.3
ResourceManagementOfBdt	5.4	Resource Management of Background Data Transfer (BDT) API	TS29122_ResourceManagementOfBdt.yaml	3gpp-bdt	A.4
ChargeableParty	5.5	Chargeable Party API	TS29122_ChargeableParty.yaml	3gpp-chargeable-party	A.5
NIDD	5.6	Non-IP Data Delivery (NIDD) API	TS29122_NIDD.yaml	3gpp-nidd	A.6
DeviceTriggering	5.7	Device Triggering API	TS29122_DeviceTriggering.yaml	3gpp-device-triggering	A.7
GMDviaMBMSbyMB2	5.8.2	Group Message Delivery via MBMS by MB2 API	TS29122_GMDviaMBMSbyMB2.yaml	3gpp-group-message-delivery-mb2	A.8.1
GMDviaMBMSbyxMB	5.8.3	Group Message Delivery via MBMS by xMB	TS29122_GMDviaMBMSbyxMB.yaml	3gpp-group-message-delivery-xmb	A.8.2
ReportingNetworkStatus	5.9	Network Status Reporting API	TS29122_ReportingNetworkStatus.yaml	3gpp-network-status-reporting	A.9
CpProvisioning	5.10	Communication Patterns (CP) Parameters Provisioning API	TS29122_CpProvisioning.yaml	3gpp-cp-parameter-provisioning	A.10
PfdManagement	5.11	Packet Flow Description (PFD) Management API	TS29122_PfdManagement.yaml	3gpp-pfd-management	A.11
ECRControl	5.12	Enhanced Coverage Restriction Control API	TS29122_ECRControl.yaml	3gpp-ecr-control	A.12
NpConfiguration	5.13	Network Parameter Configuration API	TS29122_NpConfiguration.yaml	3gpp-network-parameter-configuration	A.13
AsSessionWithQoS	5.14	Application Server (AS) Session with QoS API	TS29122_AsSessionWithQoS.yaml	3gpp-as-session-with-qos	A.14
MsisdnLessMoSms	5.15	MSISDN-less Mobile-Originated SMS API	TS29122_MsisdnLessMoSms.yaml	3gpp-msisdn-less-mo-sms	A.15
RacsParameterProvisioning	5.16	RACS (Radio Capability Signaling) Parameter Provisioning API	TS29122_RacsParameterProvisioning.yaml	3gpp-racs-parameter-provisioning	A.16

## 5.2 Information applicable to several APIs

### 5.2.1 Data Types

#### 5.2.1.1 Introduction

This clause defines structured data types, simple data types and enumerations that are applicable to several APIs defined in the present specification and can be referenced from data structures defined in the subsequent clauses. In addition, data types that are defined in OpenAPI Specification [27] can also be referenced from data structures defined in the subsequent clauses.

NOTE: As a convention, data types in the present specification are written with an upper-case letter in the beginning. Parameters are written with a lower-case letter in the beginning. As an exception, data types that are also defined in OpenAPI Specification [27] can use a lower-case case letter in the beginning for consistency.

Table 5.2.1.1-1 lists these common data types.

**Table 5.2.1.1-1: Common Data Types applicable to several T8 APIs**

Data type	Section defined	Description	Applicability
AccumulatedUsage	5.2.1.2.7	Represents an accumulated usage.	
Acknowledgement	5.2.1.2.4	Represents a successful acknowledgement of a notification.	
Bandwidth	5.2.1.3.2	Represents an integer indicating a bandwidth in bits per second.	
BdtReferenceId	5.2.1.3.2	Represents a BDT Reference ID.	
Binary	5.2.1.3.2	String with format "binary" as defined in the OpenAPI Specification.	
Bytes	5.2.1.3.2	String with format "byte" as defined in the OpenAPI Specification.	
ConfigResult	5.2.1.2.15	Represents one configuration processing result for a group's members.	
DateTime	5.2.1.3.2	String with format "date-time" as defined in OpenAPI Specification.	
DateTimeRm	5.2.1.3.2	Represents the same as the DateTime data type, but with the "nullable: true" property.	
DateTimeRo	5.2.1.3.2	Represents the same as the DateTime data type, but with the "readOnly=true" property.	
DayOfWeek	5.2.1.3.2	Integer between 1 and 7 denoting a weekday. 1 shall indicate Monday, and the subsequent weekdays shall be indicated with the next higher numbers. 7 shall indicate Sunday.	
DurationMin	5.2.1.3.2	Unsigned integer identifying a period of time in units of minutes.	
DurationSec	5.2.1.3.2	Unsigned integer identifying a period of time in units of seconds.	
DurationSecRm	5.2.1.3.2	Represents the same as the DurationSec data type, but with the "nullable: true" property.	
DurationSecRo	5.2.1.3.2	Represents the same as the DurationSec data type, but with the "readOnly=true" property.	
Event	5.2.1.3.3	Represents a bearer event.	
EventReport	5.2.1.2.6	Represents an event report.	
EthFlowInfo	5.2.1.2.18	Represents flow Ethernet flow information	
ExternalGroupId	5.2.1.3.2	Represents an external group identifier.	
ExternalId	5.2.1.3.2	Represents an external identifier.	
FlowInfo	5.2.1.2.8	Represents IP flow information.	
InvalidParam	5.2.1.2.13	Represents the description of invalid parameters, for a request rejected due to invalid parameters.	
Ipv4Addr	5.2.1.3.2	Represents an IPv4 address.	
Ipv4AddrRo	5.2.1.3.2	Represents the same as the Ipv4Addr data type, but with the "readOnly=true" property.	
Ipv6Addr	5.2.1.3.2	Represents an IPv6 address.	
Ipv6AddrRo	5.2.1.3.2	Represents the same as the Ipv6Addr data type, but with the "readOnly=true" property.	
Link	5.2.1.3.2	Represents a link towards a referenced resource.	
LinkRm	5.2.1.3.2	Represents the same as the Link data type, but with the "nullable: true" property.	
LocationArea	5.2.1.2.11	Represents a user location area.	
LocationArea5G	5.2.1.2.17	Represents a user location area when the UE is attached to 5G.	
Mcc	5.2.1.3.2	Represents a Mobile Country Code.	
Mnc	5.2.1.3.2	Represents a Mobile Network Code.	
Msisdn	5.2.1.3.2	Represents an MSISDN.	
NotificationData	5.2.1.2.5	Represents the information to be conveyed in a bearer level event(s) notification.	
PlmnId	5.2.1.2.14	Represents the identifier of a PLMN.	
Port	5.2.1.3.2	Unsigned integer with valid values between 0 and 65535 representing a port.	
PortRo	5.2.1.3.2	Represents the same as the Port data type, but with the "readOnly=true" property.	
ProblemDetails	5.2.1.2.12	Represents additional information and details on an error response.	
ResourceId	5.2.1.3.2	Represents an identifier of a resource within a resource URI.	

ResultReason	5.2.1.3.4	Represents a failure result reason.	
ScsAsId	5.2.1.3.2	Represents an SCS/AS identifier.	
SponsorInformation	5.2.1.2.1	Represents a sponsor information.	
TestNotification	5.2.1.2.9	Represents a notification that can be sent to test whether a chosen notification mechanism works.	
TimeOfDay	5.2.1.3.2	Represents a time in a day.	
TimeWindow	5.2.1.2.3	Represents a time window identified by a start time and a stop time.	
Uri	5.2.1.3.2	Represents a URI.	
UsageThreshold	5.2.1.2.2	Represents a usage threshold.	
UsageThresholdRm	5.2.1.2.16	Represents the same as the UsageThreshold data type but with the "nullable: true" property.	
Volume	5.2.1.3.2	Unsigned integer identifying a volume in units of bytes.	
VolumeRm	5.2.1.3.2	Represents the same as the Volume data type, but with the "nullable: true" property.	
WebsocketNotifConfig	5.2.1.2.10	Represents the configuration information for the delivery of notifications over Websockets.	

## 5.2.1.2 Referenced structured data types

### 5.2.1.2.1 Type: SponsorInformation

This type represents a sponsor information. It shall comply with the provisions defined in table 5.2.1.2.1-1.

**Table 5.2.1.2.1-1: Definition of the SponsorInformation data type**

Attribute name	Data type	Cardinality	Description
sponsorId	string	1	It indicates Sponsor ID.
aspld	string	1	It indicates Application Service Provider ID.

### 5.2.1.2.2 Type: UsageThreshold

This type represents a usage threshold. It shall comply with the provisions defined in table 5.2.1.2.2-1.

Only one of DownlinkVolume, UplinkVolume and TotalVolume shall be provided. If the server supports both duration and volume, then the first threshold that has been reached will apply.

**Table 5.2.1.2.2-1: Definition of the UsageThreshold data type**

Attribute name	Data type	Cardinality	Description
duration	DurationSec	0..1	Indicates the length of time in seconds
totalVolume	Volume	0..1	Total data octets for both downlink and uplink
downlinkVolume	Volume	0..1	Downlink data octets
uplinkVolume	Volume	0..1	Uplink data octets

### 5.2.1.2.3 Type: TimeWindow

This type represents a start time and a stop time of a time window. It shall comply with the provisions defined in table 5.2.1.2.3-1.

**Table 5.2.1.2.3-1: Definition of the TimeWindow data type**

Attribute name	Data type	Cardinality	Description
startTime	DateTime	1	Indicates the absolute start time of the time window
stopTime	DateTime	1	Indicates the absolute stop time of the time window

## 5.2.1.2.4 Type: Acknowledgement

This type represents a successful acknowledgement for a notification.

**Table 5.2.1.2.4-1: Definition of the Acknowledgement data type**

Attribute name	Data type	Cardinality	Description
details	string	1	A human-readable explanation specific to this successful acknowledgement

## 5.2.1.2.5 Type: NotificationData

This type represents the parameters which shall be notify the SCS/AS for bearer level event(s).

**Table 5.2.1.2.5-1: Definition of the NotificationData data type**

Attribute name	Data type	Cardinality	Description
transaction	Link	1	Link to the transaction resource to which this notification is related.
eventReports	array(EventReport)	1..N	Contains the reported event and applicable information

## 5.2.1.2.6 Type: EventReport

This type represents an event report. It shall comply with the provisions defined in table 5.2.1.2.6-1.

**Table 5.2.1.2.6-1: Definition of the EventReport data type**

Attribute name	Data type	Cardinality	Description
event	Event	1	Indicates the event reported by the SCEF.
accumulatedUsage	AccumulatedUsage	0..1	Contains the applicable information corresponding to the event.
flowlds	array(integer)	0..N	Identifies the IP flows that were sent during event subscription

## 5.2.1.2.7 Type: AccumulatedUsage

This type represents an accumulated usage. It shall comply with the provisions defined in table 5.2.1.2.7-1.

**Table 5.2.1.2.7-1: Definition of the AccumulatedUsage data type**

Attribute name	Data type	Cardinality	Description
duration	DurationSec	0..1	Indicates the length of time in seconds
totalVolume	Volume	0..1	Total data octets for both downlink and uplink
downlinkVolume	Volume	0..1	Downlink data octets
uplinkVolume	Volume	0..1	Uplink data octets

## 5.2.1.2.8 Type: FlowInfo

This type represents flow information. It shall comply with the provisions defined in table 5.2.1.2.8-1.

**Table 5.2.1.2.8-1: Definition of the FlowInfo data type**

Attribute name	Data type	Cardinality	Description	Applicability
flowId	integer	1	Indicates the IP flow.	
flowDescriptions	array(string)	0..2	Indicates the packet filters of the IP flow. Refer to clause 5.3.8 of 3GPP TS 29.214 [10] for encoding. It shall contain UL and/or DL IP flow description.	
tosTC	TosTrafficClasses	0..1	Type of service or Traffic Class.	

NOTE: The "tosTC" attribute can be included when another packet filter attribute is needed to differentiate between packet flows. For example, packet flows encapsulated and encrypted by a tunnelling protocol can be differentiated by the ToS/TC value of the outer header if appropriately set by the application. To use ToS/TC for service data flow detection, network configuration by the operator (and additionally by the 3rd party Service Provider when the transport network is not fully within the operator control) needs to ensure there is no ToS/TC re-marking applied along the path from the application to the PSA UPF and the specific ToS/TC values are managed properly to avoid potential collision with other usage (e.g., paging policy differentiation).

#### 5.2.1.2.9 Type: TestNotification

This type represents a notification that can be sent to test whether a chosen notification mechanism works. It shall be supported if the feature "Notification\_test\_event", as defined for APIs that use notifications, is supported.

**Table 5.2.1.2.9-1: Definition of the TestNotification data type**

Attribute name	Data type	Cardinality	Description
subscription	Link	1	Link of the subscription resource to which the notification is related.

#### 5.2.1.2.10 Type: WebsocketNotifConfig

This type represents configuration for the delivery of notifications over Websockets. It shall be supported if the feature "Notification\_websocket", as defined for APIs that use notifications, is supported.

**Table 5.2.1.2.10-1: Definition of the WebsocketNotifConfig data type**

Attribute name	Data type	Cardinality	Description
websocketUri	Link	0..1	Set by the SCEF to indicate to the SCS/AS the Websocket URI to be used for delivering notifications. (NOTE 1)
requestWebsocketUri	boolean	0..1	Set by the SCS/AS to indicate that the Websocket delivery is requested. (NOTE 2)
<p>NOTE 1: A Websocket URI should use the scheme "wss" (Websocket Secure) for encrypted delivery and may use the scheme "ws" (Websocket) for unencrypted delivery. If the WebsocketNotifConfig data type is used in an HTTP response, this attribute shall be present. If the WebsocketNotifConfig data type is used in an HTTP request, this attribute shall not be set by the SCS/AS in a request to create a resource, and shall not be modified by the SCS/AS in a request to modify a resource.</p> <p>NOTE 2: In a request to create or update a resource, this attribute shall be set to true by the SCS/AS to request the SCEF to provide a Websocket URI for the delivery of notifications, and shall be absent otherwise. In any HTTP response, this attribute shall retain the value that was provided upon resource creation or update.</p>			

#### 5.2.1.2.11 Type: LocationArea

This data type represents the user location area which is sent from the SCS/AS to the SCEF.

**Table 5.2.1.2.11-1: Definition of the LocationArea data Type**

Attribute name	Data type	Cardinality	Description
cellIds	array(string)	0..N	Indicates a list of Cell Global Identities of the user which identifies the cell the UE is registered.
enodeBIds	array(string)	0..N	Indicates a list of eNodeB identities in which the UE is currently located.
routingAreaIds	array(string)	0..N	Identifies a list of Routing Area Identities of the user where the UE is located.
trackingAreaIds	array(string)	0..N	Identifies a list of Tracking Area Identities of the user where the UE is located.
geographicAreas	array(GeographicArea)	0..N	Identifies a list of geographic area of the user where the UE is located.
civicAddresses	array(CivicAddress)	0..N	Identifies a list of civic addresses of the user where the UE is located.

## 5.2.1.2.12 Type: ProblemDetails

**Table 5.2.1.2.12-1: Definition of the ProblemDetails data type**

Attribute name	Data type	Cardinality	Description
type	Uri	0..1	A URI reference according to IETF RFC 3986 [6] that identifies the problem type.
title	string	0..1	A short, human-readable summary of the problem type. It should not change from occurrence to occurrence of the problem.
status	integer	0..1	The HTTP status code for this occurrence of the problem.
detail	string	0..1	A human-readable explanation specific to this occurrence of the problem.
instance	Uri	0..1	A URI reference that identifies the specific occurrence of the problem.
cause	string	0..1	A machine-readable application error cause specific to this occurrence of the problem This IE should be present and provide application-related error information, if available.
invalidParams	array(InvalidParam)	0..N	Description of invalid parameters, for a request rejected due to invalid parameters.
supportedFeatures	SupportedFeatures	0..1	Features supported by the server (SCEF or SCS/AS).  When present, this IE shall indicate the features supported by the server; if the server supports no features, this IE shall be set to the character "0".

NOTE 1: See IETF RFC 9457 [8] for detailed information and guidance for each attribute.  
NOTE 2: Additional attributes may be defined per API.

## 5.2.1.2.13 Type: InvalidParam

**Table 5.2.1.2.13-1: Definition of the InvalidParam data type**

Attribute name	Data type	Cardinality	Description
param	string	1	Attribute's name encoded as a JSON Pointer, or header's name.
reason	string	0..1	A human-readable reason, e.g. "must be a positive integer".



## 5.2.1.2.14 Type: PlmnId

**Table 5.2.1.2.14-1: Definition of the PlmnId data type**

Attribute name	Data type	Cardinality	Description
mcc	Mcc	1	Mobile Country Code
mnc	Mnc	1	Mobile Network Code

## 5.2.1.2.15 Type: ConfigResult

This type represents one configuration processing result for the group members.

**Table 5.2.1.2.15-1: Definition of the ConfigResult data type**

Attribute name	Data type	Cardinality	Description
externalIds	array(ExternalId)	0..N	Each element indicates an external identifier of the UE. (NOTE)
msisdns	array(Msisdn)	0..N	Each element identifies the MS internal PSTN/ISDN number allocated for the UE (NOTE)
resultReason	ResultReason	1	Identifies the configuration failure reason for the group members.
NOTE: Either "externalId" or "msisdns" shall be included for a group member.			

## 5.2.1.2.16 Type: UsageThresholdRm

This type represents a usage threshold which is defined in clause 5.2.1.2.2 but defined with "nullable: true" property so it can be removed in "JSON Merge Patch", as defined in IETF RFC 7396 [39]. It shall comply with the provisions defined in table 5.2.1.2.16-1.

Only one of "downlinkVolume", "uplinkVolume" and "totalVolume" shall be provided. Duration and volume are also removable in "JSON Merge Patch". If the server supports both duration and volume, then the first threshold that has been reached will apply.

**Table 5.2.1.2.16-1: Definition of the UsageThresholdRm data type**

Attribute name	Data type	Cardinality	Description
duration	DurationSecRm	0..1	Indicates the length of time in seconds
totalVolume	VolumeRm	0..1	Total data octets for both downlink and uplink
downlinkVolume	VolumeRm	0..1	Downlink data octets
uplinkVolume	VolumeRm	0..1	Uplink data octets

## 5.2.1.2.17 Type: LocationArea5G

This data type represents the user location area which is sent from the AF to the NEF.

**Table 5.2.1.2.17-1: Definition of the LocationArea5G data Type**

Attribute name	Data type	Cardinality	Description
geographicAreas	array(GeographicArea)	0..N	Identifies a list of geographic area of the user where the UE is located.
civicAddresses	array(CivicAddress)	0..N	Identifies a list of civic addresses of the user where the UE is located.
nwAreaInfo	NetworkAreaInfo	0..1	This IE represents the network area information of the user where the UE is located.

## 5.2.1.2.18 Type: EthFlowInfo

This type represents Ethernet flow information. It shall comply with the provisions defined in table 5.2.1.2.18-1.

**Table 5.2.1.2.18-1: Definition of the EthFlowInfo data type**

Attribute name	Data type	Cardinality	Description
flowId	integer	1	Indicates the Ethernet flow.
ethFlowDescriptions	array(EthFlowDescriptions)	0..2	Indicates the packet filters of the Ethernet flow. Refer to clause 5.6.2.17 of 3GPP TS 29.514 [52] for encoding of each Ethernet flow. It shall contain UL and/or DL Ethernet flow description.

## 5.2.1.3 Referenced Simple data types and enumerations

## 5.2.1.3.1 Introduction

This clause defines simple data types and enumerations that are referenced from data structures.

## 5.2.1.3.2 Simple data types

The reused datatypes defined in OpenAPI Specification [27] listed in table 5.2.1.3.2-1 and the simple data types defined in table 5.2.1.3.2-2 apply to several T8 APIs.

**Table 5.2.1.3.2-1: Reused OpenAPI data types**

Type name	Description
boolean	As defined in OpenAPI Specification [27], i.e. either value "true" or value "false" as defined in IETF RFC 7159 [5].
integer	As defined in OpenAPI Specification [27].
number	As defined in OpenAPI Specification [27].
string	As defined in OpenAPI Specification [27].
NOTE:	Data type names defined in OpenAPI Specification [27] do not follow the convention to start with capital letters otherwise used in this specification.

Table 5.2.1.3.2-2: Simple data types applicable to several APIs

Type name	Description
Bandwidth	Integer indicating a bandwidth in bits per second.
BdtReferenceld	String identifying a BDT Reference ID as defined in clause 5.3.3 of 3GPP TS 29.154 [9].
Binary	String with format "binary" as defined in OpenAPI Specification [27].
Bytes	String with format "byte" as defined in OpenAPI Specification [27], i.e, base64-encoded characters.
DayOfWeek	Integer between and including 1 and 7 denoting a weekday. "1" shall indicate "Monday", and the subsequent weekdays shall be indicated with the next higher numbers. "7" shall indicate "Sunday".
DateTime	String with format "date-time" as defined in OpenAPI Specification [27].
DateTimeRm	String with format "date-time" as defined in OpenAPI [27] with "nullable: true" property.
DateTimeRo	String with format "date-time" as defined in OpenAPI [27] with "readOnly: true" property.
DurationSec	Unsigned integer identifying a period of time in units of seconds.
DurationSecRm	Unsigned integer identifying a period of time in units of seconds with "nullable: true" property.
DurationSecRo	Unsigned integer identifying a period of time in units of seconds with "readOnly: true" property.
DurationMin	Unsigned integer identifying a period of time in units of minutes.
ExternalId	String containing a local identifier followed by "@" and a domain identifier. Both the local identifier and the domain identifier shall be encoded as strings that do not contain any "@" characters. See clause 4.6.2 of 3GPP TS 23.682 [2] for more information.
ExternalGroupId	String containing a local identifier followed by "@" and a domain identifier. Both the local identifier and the domain identifier shall be encoded as strings that do not contain any "@" characters. See clauses 4.6.2 and 4.6.3 of 3GPP TS 23.682 [2] for more information.
Ipv4Addr	String identifying an Ipv4 address formatted in the "dotted decimal" notation as defined in IETF RFC 1166 [28].
Ipv6Addr	String identifying an Ipv6 address formatted according to clause 4 in IETF RFC 5952 [29]. The mixed Ipv4 Ipv6 notation according to clause 5 of IETF RFC 5952 [29] shall not be used.
Ipv4AddrRo	String identifying an Ipv4 address formatted in the "dotted decimal" notation as defined in IETF RFC 1166 [28], with "readOnly: true" property.
Ipv6AddrRo	String identifying an Ipv6 address formatted according to clause 4 in IETF RFC 5952 [29], with "readOnly: true" property. The mixed Ipv4 Ipv6 notation according to clause 5 of IETF RFC 5952 [29] shall not be used.
Link	String formatted according to IETF RFC 3986 [7] identifying a referenced resource.
LinkRm	String formatted according to IETF RFC 3986 [7] identifying a referenced resource, but with the "nullable: true" property.
Mcc	String encoding a Mobile Country Code part of the PLMN, comprising 3 digits, as defined in 3GPP TS 38.413 [54].
Mnc	String encoding a Mobile Network Code part of the PLMN, comprising 2 or 3 digits, as defined in 3GPP TS 38.413 [54].
Msisdn	String formatted according to clause 3.3 of 3GPP TS 23.003 [14] that describes an MSISDN.
Port	Unsigned integer with valid values between 0 and 65535.
PortRo	Unsigned integer with valid values between 0 and 65535, with "readOnly: true" property.
ResourceId	String chosen by the SCEF to serve as an identifier in a resource URI.
ScsAsId	String that identifies an SCS/AS.
TimeOfDay	String with format "partial-time" or "full-time" as defined in clause 5.6 of IETF RFC 3339 [15]. Examples: "20:15:00", "20:15:00-08:00" (for 8 hours behind UTC).
Uri	String providing an URI formatted according to IETF RFC 3986 [7].
Volume	Unsigned integer identifying a volume in units of bytes.
VolumeRm	Unsigned integer identifying a volume in units of bytes with "nullable: true" property.

### 5.2.1.3.3 Enumeration: Event

The enumeration Event represents event reported by the SCEF.

Table 5.2.1.3.3-1: Enumeration Event

Enumeration value	Description
SESSION_TERMINATION	Indicates that Rx session is terminated.
LOSS_OF_BEARER	Indicates a loss of a bearer. (NOTE 2)
RECOVERY_OF_BEARER	Indicates a recovery of a bearer. (NOTE 2)
RELEASE_OF_BEARER	Indicates a release of a bearer. (NOTE 2)
USAGE_REPORT	Indicates the usage report event.
FAILED_RESOURCES_ALLOCATION	Indicates the resource allocation is failed.
SUCCESSFUL_RESOURCES_ALLOCATION	Indicates the resource allocation is successful.
NOTE 1: The "enNB" feature defined in clause 5.5.4 supports both subscription and notification for SUCCESSFUL_RESOURCES_ALLOCATION event, and explicit subscription for all the events.	
NOTE 2: The "LOSS_OF_BEARER", RECOVERY_OF_BEARER, and RELEASE_OF_BEARER only apply to 4G.	

#### 5.2.1.3.4 Enumeration: ResultReason

The enumeration ResultReason represents a failure result reason.

Table 5.2.1.3.4-1: Enumeration ResultReason

Enumeration value	Description
ROAMING_NOT_ALLOWED	Identifies the configuration parameters are not allowed by roaming agreement.
OTHER_REASON	Identifies the configuration parameters are not configured due to other reason.

#### 5.2.1.4 Conventions for documenting structured data types

The structured data types shall represent an object (see IETF RFC 8259 [40]). The structured data types shall contain attributes that are simple data types, structured data types, arrays (see below), maps (see below) or enumerations.

An array (see IETF RFC 8259 [40]) shall represent a list of values without keys and with significance in the order of sequence. All values shall be of the same type.

A map shall represent an object (see IETF RFC 8259 [40]) with a list of key-value pairs (with no significance in the order of sequence), where all keys are of type string and shall be unique identifiers assigned by the application rather than by the schema, and where all values shall be of the same type.

NOTE 1: Maps are supported by the OpenAPI specification [27] as described at <https://swagger.io/docs/specification/data-models/dictionaries/>. Maps can enable a faster lookup of elements identified by some key in huge data structures compared to arrays that contain the key within the elements. Maps can also be used instead of arrays to modify individual elements when modification instructions of the PATCH method are compliant to IETF RFC 7396 [39].

Each structured data type shall be specified in a separate clause as illustrated in table 5.2.1.4-1.

Table 5.2.1.4-1: Definition of type &lt;Data type&gt;

Attribute name	Data type	Cardinality	Description
<attribute name>	"<type>" or "array(<type>)" or "map(<type>)"	"0..1", "1", or "M..N",	<only if applicable>

**Attribute name:** Name of attributes that belong to the specified data type.

**Data type:** Data type of the attribute. If the data type is indicated as "<type>", the attribute shall be of data type <type>. If the data type is indicated as "array(<type>)", the attribute shall be an array (see IETF RFC 8259 [40]) that contains elements of data type <type>. If the data type is indicated as "map (<type>)", the attribute shall be an object (see IETF RFC 8259 [40]) encoding a map (see OpenAPI specification [27]) that contains as values elements of data type <type>. <type> can either be "integer", "number", "string" or "boolean" (as defined in the OpenAPI specification [27]), or a data type defined in a 3GPP specification.

**Cardinality:** Defines the allowed number of occurrence of data type <type>. A cardinality of "M..N", is only allowed for data types "array(<type>)" and "map(<type>)" and indicates the number of elements within the array or map; the values M and N can either be the characters "M" and "N", respectively, or integer numbers with M being greater than or equal 0, and N being greater than 1 and M, For data type "<type>", the cardinality shall be set to "0..1" or "1". A lower boundary of "0" for the cardinality also indicates that the attribute is optional. A lower boundary of "0" for the cardinality indicates that the attribute is optional.

NOTE 2: The "0..N" implies the array or map type of the attribute may be optional. If the attribute is present, the minimum number of elements is described in openAPI file.

**Description:** Describes the meaning and use of the attribute and may contain normative statements.

## 5.2.2 Usage of HTTP

### 5.2.2.1 General

For T8 APIs, support of HTTP/1.1 (IETF RFC 9112 [16], IETF RFC 9110 [17], IETF RFC 9111 [20]) over TLS is mandatory and support of HTTP/2 (IETF RFC 9113 [22]) over TLS is recommended. TLS shall be used as specified in clause 5.5 of 3GPP TS 33.187 [35]. An SCS/AS desiring to use HTTP/2 shall use the HTTP upgrade mechanism to negotiate applicable HTTP version as described in IETF RFC 9113 [22].

### 5.2.2.2 Usage of the HTTP PATCH method

The HTTP PATCH method, as defined in IETF RFC 5789 [38], allows for a partial update of previously sent data, e.g. resources. For a complete replacement of previously sent data, the HTTP PUT method is used. It is defined separately for each resource whether the HTTP PUT and/or the HTTP PATCH are applicable.

If the HTTP PATCH method is used:

- if no modification of individual elements within an array needs to be supported, the JSON bodies within the PATCH request shall be encoded according to "JSON Merge Patch", as defined in IETF RFC 7396 [39]; or
- if a modification of individual elements within an array needs to be supported, the "JSON Patch" encoding of changes defined in IETF RFC 6902 [67] shall be used.

## 5.2.3 Content type

The bodies of HTTP request and successful HTTP responses shall be encoded in JSON format (see IETF RFC 8259 [5]).

The MIME media type that shall be used within the related Content-Type header field is "application/json", as defined in IETF RFC 8259 [5].

JSON object used in the HTTP PATCH request shall be encoded according to:

- "JSON Merge Patch" and shall be signalled by the content type "application/merge-patch+json", as defined in IETF RFC 7396 [39]; or
- "JSON Patch" and shall be signalled by the content type "application/json-patch+json", as defined in IETF RFC 6902 [67].

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 9457 [8].

NOTE: This release only supports the content type JSON.

## 5.2.4 URI structure

### 5.2.4.1 Resource URI structure

Resources are either individual resources, or structured resources that can contain child resources. It is recommended to design each resource following one of the archetypes provided in the Annex C of 3GPP TS 29.501 [49].

All API URIs of T8 APIs shall be:

**{apiRoot}/<apiName>/<apiVersion>**

"apiRoot" is configured by means outside the scope of the present document. "apiName" and "apiVersion" shall be set dependent on the API, as defined in the corresponding clauses below. All resource URIs in the clauses below are defined relative to the above root API URI.

NOTE 1: The "apiVersion" will only be increased if the new API version contains not backward compatible changes. Otherwise, the supported feature mechanism defined in clause 5.2.7 can instead be used to negotiate extensions.

NOTE 2: A different root structure can be used when the Resource URI is preconfigured in the SCS/AS.

The root structure may be followed by "apiSpecificSuffixes" that are dependent on the API and are defined separately for each API as resource URI where they apply:

**{apiRoot}/<apiName>/<apiVersion>/<apiSpecificSuffixes>**

The naming conventions defined in clause 5.1.3 of 3GPP TS 29.501 [49] shall apply.

### 5.2.4.2 Custom operations URI structure

The URI of a custom operation which is associated with a resource shall have the following structure:

**{apiRoot}/<apiName>/<apiVersion>/<apiSpecificSuffixes>/<custOpName>**

Custom operations can also be associated with the service instead of a resource. The URI of a custom operation which is not associated with a resource shall have the following structure:

**{apiRoot}/<apiName>/<apiVersion>/<custOpName>**

In the above URI structures, "apiRoot", "apiName", "apiVersion" and "apiSpecificSuffixes" are as defined in clause 5.2.4.1 and "custOpName" represents the name of the custom operation as defined in clause 5.1.3.2 of 3GPP TS 29.501 [49].

### 5.2.4.3 Callback URI structure

The purpose of the callback URI is to enable an HTTP client (the SCS/AS or SCEF) to provide the URI to be used by an HTTP server (the SCEF or SCS/AS) to send notifications or callback requests.

The callback URI shall be in the form of an absolute URI as defined in clause 4.3 of IETF RFC 3986 [7], including an authority, and excluding any query component, any fragment component and any userinfo subcomponent.

Therefore, a callback URI consists of the following components, specified with ABNF syntax (see IETF RFC 5234 [69]):

URI = scheme ":" "/" host [ ":" port ] / path

Where 'host' is either an FQDN or an IP address and the 'path' is a path to an HTTP client (the SCS/AS or SCEF) resource.

## 5.2.5 Notifications

### 5.2.5.1 General

The SCEF and SCS/AS shall support the delivery of Notifications using a separate HTTP connection towards an address assigned by the SCS/AS, as described in clause 5.2.5.2.

An SCEF and SCS/AS may support testing a notification connection as described in clause 5.2.5.3. An SCEF and SCS/AS may support the delivery of Notification using Websocket (IETF RFC 6455 [32]) as described in clause 5.2.5.4.

### 5.2.5.2 Notification Delivery using a separate HTTP connection

If a delivery of notifications is required for an API, the SCS/AS shall provide a notification destination URI, which designates to the SCEF where the SCEF shall send the HTTP Notifications. This URI is provided within an attribute (e.g. "notificationDestination", "notifUri", "notificationUri") defined in the data types that are passed in a request to create a resource that represents a subscription to notifications, unless it is specified for that API that a preconfigured destination address is used.

The SCS/AS may provide the same notification destination URI for several subscriptions, and the SCEF should then use the same HTTP connection to deliver related notifications.

The SCEF shall take the role of the HTTP client on the HTTP connection for the delivery of Notifications. Clause 5.2.2 shall also apply for this HTTP connection with the exception that an SCEF (rather than an SCS/AS) desiring to use HTTP/2 shall use the HTTP upgrade mechanism to negotiate applicable HTTP version.

### 5.2.5.3 Notification Test Event

If the optional "Notification\_test\_event" feature is supported, the SCS/AS may test whether notifications can be received by subscribing to the notification of a test event by providing a "requestTestNotification" attribute set to "true" in the HTTP request to create or update a subscription for notifications. In any other HTTP request or response, this attribute shall retain the value that was provided upon subscription resource creation.

Upon receiving the "requestTestNotification" attribute as part of a subscription creation or update request, the SCEF shall send immediately after establishing the notification delivery mechanism a test notification containing a body formatted according to the "TestNotification" data type as defined in clause 5.2.1.2.12. If the SCS/AS does not receive the test notification within a configured time, the SCS/AS knows that the notification delivery with the selected method is not possible and may take corrective actions.

### 5.2.5.4 Notification Delivery using Websocket

The procedures in the present clause only apply if SCS/AS and SCEF support the "Notification\_websocket" feature. If the feature "Notification\_websocket" is supported, then the feature "Notification\_test\_event" shall also be supported.

If a delivery of notifications is required for an API and the SCS/AS does not know from previous interactions with the SCEF whether delivery of notifications over a separate HTTP connection works, the SCS/AS should initially request the SCEF to try to establish a separate HTTP connection for notification delivery according to clause 5.2.5.2 by providing a URI to the SCEF designating where to send HTTP Notifications, and shall also subscribe to the notification of a test event as in clause 5.2.5.3.

If the SCS/AS does not receive the requested notification of the test event during a configured period after the subscription, the SCS/AS may configure the subscription to request the SCEF to provide a URI for an HTTP connection to upgrade to Websocket, setting the "requestWebsocketUri" attribute to "true" as specified in clause 5.2.1.2.13. The SCS/AS may also request the SCEF to provide a URI in a new subscription creation request, and should in this case terminate the original subscription.

NOTE 1: If the SCS/AS has requested the delivery of notifications to a separate entity, it needs to be informed by that separate entity about the receipt of the test notification. That communication between the separate entity and the SCS/AS is out of scope of the present document.

When the SCEF receives a subscription creation or update request to use Websockets to deliver notifications (i.e. with the "requestWebsocketUri" attribute set to "true"), it shall assign a Websocket URI where to receive a Websocket

connection establishment and provide this URI in the "websocketUri" attribute in the response, as defined in clause 5.1.2.1.13. Once such WebSocket URI has been assigned for a particular subscription resource, subsequent update requests to this resource that ask for the assignment of a new WebSocket URI for that subscription shall be rejected by the SCEF.

Upon the reception of the WebSocket URI from the SCEF in the "websocketUri" attribute, as specified in clause 5.2.1.2.13-1, in the subscription creation or subscription update response, the SCS/AS or a separate entity that is intended to receive the notification shall establish an HTTP connection towards that URI and shall upgrade that connection to the WebSocket protocol (IETF RFC 6455 [32]) using the HTTP upgrade mechanism defined in IETF RFC 9110 [17].

NOTE 2: For delivery of Notifications to a separate entity, the SCS/AS needs to provide the WebSocket URI to that separate entity. That communication between the SCS/AS and the separate entity is out of scope of the present document.

The following framing of the request and response shall be used when delivering a notification or acknowledging its delivery through Websockets.

NOTE 3: The framing is aligned as much as possible with HTTP delivery in order to simplify implementations.

To deliver a notification towards the SCS/AS, the SCEF shall embed the following structure in a separate WebSocket data frame with 0x2 (Binary) opcode in the following order:

- 1) The string "3GPP-WS-Notif-Seq:", followed by a blank, followed by a four-byte sequence number, encoded as decimal number in ASCII, followed by CRLF
- 2) The following HTTP headers in any order, with the syntax and semantics as defined in IETF RFC 9110 [17]: Content-Type (mandatory), Content-Encoding (optional), Content-Length (mandatory). Every HTTP header line shall be ended by CRLF.
- 3) CRLF to end the headers section.
- 4) The content of the notification, as defined in the individual APIs.

NOTE 4: The content is the same as the one that would be used if delivering the notification as defined in clause 5.2.5.3.

To acknowledge the reception of a notification message towards the SCEF, the SCS/AS shall embed the following structure in a separate WebSocket data frame with 0x2 (Binary) opcode in the following order:

- 1) The string "3GPP-WS-Notif-Seq:", followed by a blank, followed by the four-byte sequence number of the notification to be confirmed, encoded as decimal number in ASCII, followed by CRLF.
- 2) The HTTP status code (e.g. 204) and status message (e.g. No Content) as defined for HTTP delivery of the notification in the individual APIs, separated by a single blank character, and ended by CRLF.
- 3) Conditionally, as defined in IETF RFC 9110 [17], the following HTTP headers in any order: Content-Type, Content-Encoding, and Content-Length. Every HTTP header line shall be ended by CRLF.
- 4) CRLF to end the headers section.
- 5) The content of the response, if applicable based on the status code and the HTTP headers, as defined in IETF RFC 9110 [17].

NOTE 5: The status code, the status message and the content (if applicable), are the same as if delivering the notification as defined in clause 5.2.5.3.

Use of CRLF is defined in IETF RFC 9110 [17].

The SCEF need not wait for the confirmation of each notification before delivering the next notification. The SCEF shall determine whether a notification has been delivered successfully by correlating the sent notification with the received acknowledgement by checking the sequence numbers of both for equality. The SCEF may re-send a notification, using the same sequence number, if it has not received an acknowledgement with a matching sequence number after a configurable time-out. The SCS/AS shall consider notifications with the same sequence number that arrive within a configurable time interval as duplicates.



The SCS/AS should send periodic Websocket "PING" frames to keep the connection alive.

NOTE 6: the TCP layer will handle a possible fragmentation and reassembly of large messages.

The security related clause 6 shall also apply for the HTTP connection that is upgraded to Websocket.

## 5.2.6 Error handling

Table 5.2.6-1 lists response bodies that are applicable to all APIs and as responses for all requests in the present specification unless otherwise specified. The HTTP client shall mandatorily support the processing of the status code for all the applicable methods, when received in a HTTP response message. In such cases the HTTP client shall also support the handling of the "ProblemDetails" JSON object with the Content-Type header field set to the value "application/problem+json", if the corresponding API definition in the current specification does not specify another response body for the corresponding status code.

**Table 5.2.6-1: Response bodies supported for responses to all requests.**

Response body	Data type	Cardinality	Response Codes (NOTE 1)	Remarks (NOTE 2, NOTE 4)	Applied Methods
	ProblemDetails	1	400 Bad Request	Incorrect parameters were passed in the request.	GET, POST, PUT, PATCH, DELETE
	ProblemDetails	1	401 Unauthorized	The client is not authorized as described in IETF RFC 9110 [17].	GET, POST, PUT, PATCH, DELETE
	ProblemDetails	1	403 Forbidden	This represents the case when the server is able to understand the request but unable to fulfil the request due to errors (e.g. the requested parameters are out of range). More information may be provided in the "invalidParams" attribute of the "ProblemDetails" structure. (NOTE 3)	GET, POST, PUT, PATCH, DELETE
	ProblemDetails	1	404 Not Found	The resource URI was incorrect, for instance because of a wrong "scsAsId" field.	GET, POST, PUT, PATCH, DELETE
	ProblemDetails	1	406 Not Acceptable	The content format provided in the "Accept" header is not acceptable by the server.	GET
	ProblemDetails	1	411 Length Required	The code indicates that the server refuses to accept the request without a Content-Length header field.	POST, PUT, PATCH
	ProblemDetails	1	413 Content Too Large	<b>If the received HTTP request contains content larger than the server is able to process, the NF shall reject the HTTP request.</b>	POST, PUT, PATCH
	ProblemDetails	1	415 Unsupported Media Type	The code indicates that the resource is in a format which is not supported by the server for the method.	POST, PUT, PATCH
	ProblemDetails	1	429 Too Many Requests	The code indicates that due to excessive traffic which, if continued over time, may lead to (or may increase) an overload situation. The HTTP header field "Retry-After" may be added in the response to indicate how long the client has to wait before making a new request.	GET, POST, PUT, PATCH, DELETE
	ProblemDetails	1	500 Internal Server Error	The server encountered an unexpected condition that prevented it from fulfilling the request.	GET, POST, PUT, PATCH, DELETE
ProblemDetails	1	503 Service Unavailable	The server is unable to handle the request.	GET, POST, PUT, PATCH, DELETE	

NOTE 1: In addition to the above response codes, the SCEF can also send other valid HTTP response codes, if applicable. The list of all valid HTTP response codes can be found in HTTP Status Code Registry at IANA [6].

NOTE 2: The MIME media type that shall be used within the related Content-Type header field is "application/problem+json", as defined in IETF RFC 9457 [8].

NOTE 3: The information about which provided parameters are out of range shall be provided in the "invalidParams" attribute of the "ProblemDetails" structure for the API of network parameter configuration.

NOTE 4: More information may be provided in the "detail" attribute of the "ProblemDetails" structure.

The protocol and application errors in clause 5.2.7.2 of 3GPP TS 29.500 [44] are applicable for above status codes for the APIs defined in the present specification. Specific errors are contained in the related API definition for each API.

## 5.2.7 Feature negotiation

The procedures in clause 6.6.2 of 3GPP TS 29.500 [44] shall be applicable for the APIs defined in the present specification with the difference that the SCEF should not register any feature for northbound APIs in the NRF.

The supported features are negotiated separately for each API. For each of the APIs defined in the present specification, the applicable list of features is contained in the related API definition.

## 5.2.8 HTTP custom headers

### 5.2.8.1 General

This clause lists reused HTTP custom headers and defines any new HTTP custom headers introduced by this specification.

### 5.2.8.2 Reused HTTP custom headers

**Table 5.2.8.2-1: Reused HTTP custom headers**

Name	Reference	Description

### 5.2.8.3 Optional HTTP custom headers

#### 5.2.8.3.1 General

The Northbound APIs defined in this specification may support the HTTP custom headers specified in Table 5.2.8.3.1-1 below. A description of each custom header and the normative requirements related to when to include them are also provided in Table 5.2.8.3.1-1.

**Table 5.2.8.3.1-1: Optional HTTP custom headers**

Name	Reference	Description
Nb-Api-Sender-Timestamp	clause 5.2.8.3.2	This header may be used to indicate the date and time (with a millisecond granularity) at which an HTTP request or response is originated. This may be used e.g. for measuring signalling delays in Northbound interfaces.
Nb-Api-Max-Rsp-Time	clause 5.2.8.3.3	This header may be used in a HTTP request to indicate the duration during which the HTTP client waits for a response.
Nb-Api-Lci	clause 5.2.8.3.4	This header may be used by a SCEF to send Load Control Information (LCI) to the sending entity (e.g. SCS/AS, AF).
Nb-Api-Oci	clause 5.2.8.3.5	This header may be used by an overloaded SCEF in an API response message, or in a notification request message to signal Overload Control Information (OCI) to the sending entity (e.g. SCS/AS, AF).  This header may also be used by an overloaded sending entity (e.g. SCS/AS, AF) in a notification response or in an API request to signal Overload Control Information (OCI) to the SCEF.

### 5.2.8.3.2 Nbi-Api-Sender-Timestamp

The provisions of clause 5.2.3.3.2 of 3GPP TS 29.500 [44] also apply to this header.

NOTE: Any provisions that are specific to 5G SBI APIs (e.g. related to the support of Indirect Communication models) are however not applicable for Northbound APIs.

### 5.2.8.3.3 Nb-Api-Max-Rsp-Time

The provisions of clause 5.2.3.3.3 of 3GPP TS 29.500 [44] also apply to this header.

NOTE: Any provisions that are specific to 5G SBI APIs (e.g. related to the support of Indirect Communication models) are however not applicable for Northbound APIs.

### 5.2.8.3.4 Nbi-Api-Lci

The header contains a comma-delimited list (see IETF RFC 9110 [17]) of Load Control Information (LCI). See clause 5.2.11.

The encoding of the header follows the ABNF as defined in IETF RFC 9110 [17].

```
Nb-Api-Lci = "Nb-Api-Lci:" 1#(RWS timestamp ";" RWS lcMetric ")
```

```
timestamp = "Timestamp:" RWS DQUOTE date-time DQUOTE
```

Mandatory parameter. The date-time type is specified in IETF RFC 5322 [66] and clause 7.1.1.1 of IETF RFC 9110 [17]. It indicates the timestamp associated with the load control information.

```
lcMetric = "Load-Metric:" RWS (DIGIT / %x31-39 DIGIT / "100") "%"
```

Mandatory parameter. Load-Metric is up to 3 digits long decimal string and the value range shall be from 0 to 100.

EXAMPLE: Load Control Information:

```
Nbi-Api-Lci: Timestamp: "Tue, 04 Feb 2021 08:50:28 GMT"; Load-Metric: 50%
```

### 5.2.8.3.5 Nb-Api-Oci

The header contains a comma-delimited list of Overload Control Information (OCI). See clause 5.2.11.

The encoding of the header follows the ABNF as defined in IETF RFC 9110 [17].

```
Nb-Api-Oci = "Nb-Api-Oci:" 1#(RWS timestamp ";" RWS validityPeriod ";" RWS olcMetric ")
```

timestamp= "Timestamp:" RWS DQUOTE date-time DQUOTE

Mandatory parameter. The date-time type is specified in IETF RFC 5322 [66] and clause 7.1.1.1 of IETF RFC 9110 [17]. It indicates the timestamp at which the overload control information was generated.

validityPeriod = "Period-of-Validity:" RWS 1\*DIGIT "s"

Mandatory parameter. Period of validity is a timer that is measured in seconds. Once the timer expires, the OCI becomes invalid.

olcMetric = "Overload-Reduction-Metric:" RWS (DIGIT / %x31-39 DIGIT / "100") "%"

Mandatory parameter. Overload-Reduction-Metric up to 3 digits long decimal string and the value range shall be from 0 to 100.

EXAMPLE: Overload Control Information:

Nbi-API-OCI: Timestamp: "Tue, 04 Feb 2021 08:50:28 GMT"; Period-of-Validity: 90s; Overload-Reduction-Metric: 25%

## 5.2.9 Conventions for Open API specification files

### 5.2.9.1 General

T8 Open API specification files shall comply with the OpenAPI specification [27] and with the present clause.

Each API shall be described in one Open API specification file. In addition, 3GPP specifications may contain Open API specification file with common data types.

For the purpose of referencing (see clause 5.2.9.6), it is assumed that each Open API specification file contained in a 3GPP specification is stored as separate physical, that all Open API specification files are stored in the same directory on the local server, and that the files are named according to the conventions in clause 5.2.9.6.

### 5.2.9.2 Formatting of OpenAPI files

The following guidelines shall be used when documenting OpenAPI files:

- OpenAPI specifications shall be documented using YAML format (see YAML 1.2 [41]). For specific restrictions on the usage of YAML in OpenAPI, see OpenAPI Specification [27].
- The style used for the specification shall be "PL" (Programming Language).
- The different scopes in the YAML data structures representing collections (objects, arrays...) shall use an indentation of two white spaces.
- Comments may be added by following the standard YAML syntax ("#").
- Tabs shall not be used in OpenAPI specification files (e.g. within description fields).
- "Unbreakable" spaces (UTF-8 'NO-BREAK SPACE' (U+00A0)) shall not be used in OpenAPI specification files (e.g. within description fields). Only "normal" spaces (UTF-8 'SPACE' (U+0020)) shall be allowed.
- Trailing spaces (i.e. white spaces at the end of a line) should not be used in OpenAPI specification files.

### 5.2.9.3 Structured data types

The OpenAPI file shall contain a definition in the components/schemas section defining a schema with the name of the structured data type as key.

The schema shall contain:

- "type: object";
- "description: <description>", where <description> is the description of the data type in the table defining the structured data type. The "description" attribute should be provided for all data types, specially if they are

frequently reused from the same or other OpenAPI specification files; the "description" attribute shall always be provided for data types defined as maps, with a clear indication of the values (strings) used as key of the map;

- if any attributes in the structured data type are marked as mandatory via a minimum cardinality greater than "0", a "required" keyword listing those attributes; and
- a "properties" keyword containing for each attribute in the structured data type an entry with the attribute name as key and:
  1. if the data type is "<type>":
    - a. if the data type of the attribute is "string", "number", "integer", or "boolean", a type definition using that data type as value ("type: <data type>"); or
    - b. otherwise a reference to the data type schema for the data type <data type> of the attribute, i.e. "\$ref: '#/components/schemas/<data type>'" if that data type schema is contained in the same OpenAPI file and "\$ref: '<filename>#/components/schemas/<data type>'" if that data type schema is contained in file <filename> in the same directory on the same server;
  2. if the data type is "array(<type>)":
    - a. a type definition "type: array";
    - b. an "items:" definition containing:
      - i). if the data type of the attribute is "string", "number", "integer", or "boolean", a type definition using that data type as value ("type: <data type>"); or
      - ii). otherwise a reference to the data type schema for the data type <data type> of the attribute, i.e. "\$ref: '#/components/schemas/<data type>'" if that data type schema is contained in the same OpenAPI file and "\$ref: '<filename>#/components/schemas/<data type>'" if that data type schema is contained in file <filename> in the same directory on the same server;
    - c. if the cardinality contained an integer value <m> as lower boundary, "minItems: <m>"; and
    - d. if the cardinality contained an integer value <n> as upper boundary, "maxItems: <n>";
  3. if the data type is "map(<type>)":
    - a. a type definition "type: object";
    - b. an "additionalProperties:" definition containing:
      - i). if the data type of the attribute is "string", "number", "integer", or "boolean", a type definition using that data type as value ("type: <data type>"); or
      - ii). otherwise a reference to the data type schema for the data type <data type> of the attribute, i.e. "\$ref: '#/components/schemas/<data type>'" if that data type schema is contained in the same OpenAPI file and "\$ref: '<filename>#/components/schemas/<data type>'" if that data type schema is contained in file <filename> in the same directory on the same server;
    - c. if the cardinality contained an integer value <m> as lower boundary, "min Properties: <m>"; and
    - d. if the cardinality contained an integer value <n> as upper boundary, "max Properties: <n>"; and
  4. "description: <description>", where <description> is the description of the attribute in the table defining the structured data type; the "description" attribute shall always be provided for attributes defined as maps, with a clear indication of the values (strings) used as key of the map.

NOTE 2: In this specification, the "0..N" implies the array or map type of the attribute is either optional or conditional. If the attribute is present, the minimum number of elements of the array or map is described in openAPI file.

NOTE 3: In this specification, the "1..N" implies the array or map type of the attribute is mandatory. In such case, the minimum number of elements of the array or map is described in OpenAPI file.

Example:

Table 5.2.9.3-1: Definition of type ExampleStructuredType

Attribute name	Data type	Cardinality	Description
exSimple	ExSimple	1	exSimple attribute description
exArrayElements	array(string)	1..10	exArrayElements attribute description
exMapElements	map(ExStructure)	1..N	exMapElements attribute description, indicating the values of the map key

The data structure in table 5.2.9.3-1 is described in an OpenAPI file as follows:

```

components:
  schemas:
    ExampleStructuredType:
      type: object
      description: ExampleStructuredType data type description
      required:
        - exSimple
        - exMapElements
      properties:
        exSimple:
          $ref: '#/components/schemas/ExSimple'
        exArrayElements:
          type: array
          items:
            type: string
          minItems: 1
          maxItems: 10
          description: exArrayElements attribute description
        exMapElements:
          type: object
          additionalProperties:
            $ref: '#/components/schemas/ExStructure'
          minProperties: 1
          description: exMapElements attribute description, indicating the values of the map key

```

NOTE 4: Object schema definitions should not have property names in the "required" attribute for which a corresponding property definition does not exist.

#### 5.2.9.4 Info

The Open API specification file of an API shall contain an "info" field with the title and version as defined in clause 4.3 of 3GPP TS 29.501 [49].

#### 5.2.9.5 Servers

As defined in clause 5.2.4, the base URI of an API consists of **{apiRoot}/<apiName>/<apiVersion>**. It shall be encoded in the corresponding Open API specification file as "servers" field with **{apiRoot}** as variable.

Example:

```

servers:
  - url: '{apiRoot}/3gpp-yyyy/v1'
    variables:
      apiRoot:
        default: https://demohost.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.

```

#### 5.2.9.6 References to other 3GPP-defined Open API specification files

For the purpose of referencing, it shall be assumed that each Open API specification file contained in a 3GPP specification is stored as separate physical file, that all Open API specification files are stored in the same directory on the local server, and that the files are named according to the following convention: The file name shall consist of (in the order below):

- the 3GPP specification number in the format "Tsxyyy";
- an "\_" character;



- if the OpenAPI specification file contains an API definition, the API name as defined for corresponding base URL parts (see clause 4.4) of that API.
- if the OpenAPI specification file contains a definition of CommonData, the string "CommonData"; and
- the string ".yaml".

Examples:

Reference to Data Type "Xxx" defined in the same file

```
$ref: '#/components/schemas/Xxx'
```

Reference to Data Type "Xxx" defined as Common Data in 3GPP TS 29.122:

```
$ref: 'TS29122_CommonData.yaml#/components/schemas/Xxx'
```

Reference to Data Type "Xxx" defined within API "Nxxx\_Yyy" in 3GPP TS ab.cde:

```
$ref: 'Tsabode_Nxxx_Yyy.yaml#/components/schemas/Xxx'
```

### 5.2.9.7 Server-initiated communication

If an API contains notifications as described in clause 5.2.5, it should be described as "callback" in Open API specification files.

Example:

```
paths:
  /subscriptions:
    post:
      requestBody:
        required: true
        content:
          application/json:
            schema:
              type: object
              properties:
                callbackUrl: # Callback URL
                  type: string
                  format: uri
      responses:
        '201':
          description: Success
      callbacks:
        myNotification: # arbitrary name
          '{$request.body#/callbackUrl}': # refers The callback URL in the POST
            post:
              requestBody: # Contents of the callback message
                required: true
                content:
                  application/json:
                    schema:
                      $ref: '#/components/schemas/NotificationBody'
              responses: # Expected responses to the callback message
                '200':
                  description: xxx
```

### 5.2.9.8 Describing the body of HTTP PATCH requests

#### 5.2.9.8.1 General

As described in clause 5.2.2.2, the bodies of HTTP PATCH requests either use a "JSON Merge Patch" encoding as defined in IETF RFC 7396 [39], or a "JSON Patch" encoding as defined in IETF RFC 6902 [67].

It is possible to allow both encodings in an OpenAPI Specification [27] offering both schemas as alternative contents.

### 5.2.9.8.2 JSON Merge Patch

In the OpenAPI file, the content field key of the Request Body Object shall contain "application/merge-patch+json". The content field value is a Media Type Object identifying the applicable patch body Schema Object. The patch body Schema Object may contain structured data types derived from the data types used in the schema to describe a complete representation of the resource in such a manner that attributes that are allowed to be modified are listed in the "properties" validation keyword.

NOTE 1: A derived structured data type is beneficial if the data types used to describe a complete representation of the resource contains mandatory attributes, if attributes are allowed to be removed by the PATCH operation, or if a checking by the OpenAPI tooling that only allowed modifications are done via the "additionalProperties: false" keyword is desired. It also provides a clear description in the OpenAPI file to developers which modifications need to be supported.

As an alternative, the data types used in the schema to describe a complete representation of the resource may be used if any attributes that are allowed to be removed are marked as "nullable: true" in that schema.

Any attributes that are allowed to be removed shall be marked as "nullable: true" in the patch body Schema Object.

The "additionalProperties: false" keyword may be set.

NOTE 2: The "additionalProperties: false" keyword enables the OpenAPI tooling to check that only allowed modifications are done. Extensions of the object in future releases are still possible under the assumption that the supported features mechanism is used to negotiate the usage of any new attribute prior to the PATCH invocation. If new optional attributes are expected to be introduced without corresponding supported feature or if PATCH can be used as first operation in an API, the usage of the "additionalProperties: false" keyword is not appropriate.

### 5.2.9.8.3 JSON PATCH

In the OpenAPI file, the content field key of the Request Body Object shall contain "application/json-patch+json". The content field value is a Media Type Object identifying the applicable patch body. It may contain a mutually exclusive list (using the "oneOf" keyword) of all allowed modifications as <path, op, value> tuples, where "path" is a string containing a JSON Pointer value referring to a JSON object that is allowed to be modified, "op" is an enumeration of allowed JSON PATCH operations on the JSON object identified by "path" and "value" representing the schema/type of the value that will be updated or added at the JSON object identified by "path". In addition, an open alternative containing an object with no properties may be added using the "anyOf" keyword.

NOTE 1: A mutually exclusive list provides a clear description in the OpenAPI specification file to developers which modifications need to be supported. This is of particular interest if only a limited number of modifications need to be supported. If no open alternative is included, the OpenAPI tooling will also check that only allowed modifications are done.

NOTE 2: The open alternative allows for extensions of the PATCH in scenarios where new optional attributes are expected to be introduced without corresponding supported feature or if PATCH can be used as first operation in an API.

### 5.2.9.9 Error Responses

As described in clause 5.2.6, T8 APIs use valid HTTP response codes as error codes in HTTP responses and may include a "ProblemDetails" data structure specified in clause 5.2.1.2.12 or an application-specific data structure.

Clause 5.2.6 specifies HTTP status code per HTTP method. OpenAPI files should include at least the status codes in that table.

For the purpose of referencing, HTTP error responses with "ProblemDetails" data structure are specified as part of the CommonData OpenAPI file in Annex A.2.

Example:

In the example below, the 400, and 500 and default error response descriptions are referenced.

```
Paths:  
  /users:
```

```

get:
  responses:
    '200':
      content:
        application/json
        schema:
          $ref: '#/components/schemas/ExampleGetBody'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

The following definitions provided in Annex A.2 are used in that example:

```

components:
  responses:
    '400':
      description: Bad request
      content:
        application/problem+json:
          schema:
            $ref: '#/components/schemas/ProblemDetails'
    '500':
      description: Internal Server Error
      content:
        application/problem+json:
          schema:
            $ref: '#/components/schemas/ProblemDetails'
  default:
    description: Generic Error

```

### 5.2.9.10 Enumerations

For enumerations, the OpenAPI file shall contain a definition in the components/schemas section defining a schema with the name of the enumeration as key.

The naming conventions defined in clause 5.1.4 of 3GPP TS 29.501 [49] shall apply.

The schema:

- shall contain the "anyOf" keyword listing as alternatives:
  1. the "type: string" keyword and the "enum" keyword with a list of all defined values for the enumeration; and
  2. the "type: string" keyword and the "description" keyword with a description stating that the string is only provided for extensibility and is not used to encode contents defined in the present version of the specification, and
- should contain a description field, containing the overall meaning and purpose of the enumeration; additionally, this field may contain a list of the defined values of the enumeration together with explanations of those values.

NOTE: The "enum" keyword restricts the permissible values of the string to the enumerated ones. This can lead to extensibility problems when new values need to be introduced.

Example:

ExampleEnumeration represents xxx, and it is used to indicate yyy or zzz; it complies with the provisions defined in table 5.2.9.10-1.

**Table 5.2.9.10-1: Enumeration ExampleEnumeration**

Enumeration value	Description	Applicability
ONE	Value ONE description	
TWO	Value TWO description	

The data structure in table 5.2.9.10-1 is described in an OpenAPI file as follows:

```

components:

```

```
schemas:
  ExampleEnumeration:
    anyOf:
      - type: string
        enum:
          - ONE
          - TWO
      - type: string
        description: >
          This string provides forward-compatibility with future
          extensions to the enumeration and is not used to encode
          content defined in the present version of this API.
    description: |
      ExampleEnumeration represents xxx, and it is used to indicate yyy or zzz;
      it complies with the provisions defined in table 5.2.9.10-1 of 3GPP TS ab.cde.
      Possible values are:
      - ONE: Value ONE description
      - TWO: Value TWO description
```

### 5.2.9.11 Read only attribute

Each OpenAPI specification should include "readOnly: true" for those attributes that are only provided by the SCEF in the HTTP response message to prevent the SCS/AS from provisioning those attributes which is not expected, if the write and read operations (e.g. POST request and response) share the same data type which contains those attributes.

Example:

```
NiddStatus:
  anyOf:
    - type: string
      enum:
        - ACTIVE
        - TERMINATED_UE_NOT_AUTHORIZED
        - TERMINATED
    - type: string
      description: >
        This string provides forward-compatibility with future
        extensions to the enumeration but is not used to encode
        content defined in the present version of this API.
  Description: >
    Possible values are
    - ACTIVE: The NIDD configuration is active.
    - TERMINATED_UE_NOT_AUTHORIZED: The NIDD configuration was terminated because the UE's
    authorisation was revoked.
    - TERMINATED: The NIDD configuration was terminated.
  readOnly: true
```

### 5.2.9.12 externalDocs

Each OpenAPI specification shall provide in an "externalDoc" field the reference to the 3GPP TS describing the API, as illustrated below.

Example:

```
externalDocs
  description: 3GPP TS 29.122 V15.1.0 T8 reference point for Northbound APIs
  url: http://www.3gpp.org/ftp/Specs/archive/29_series/29.122/
```

### 5.2.9.13 Operation identifiers

Service operations defined in an OpenAPI specification file should be assigned an Operation ID.

EXAMPLE:

```
get:
  operationId: ReadInfo
  summary: Read Information.
  tags:
    - Information (Document)
  parameters:
    - name: infoType
      in: path
      description: Requested information Type
      required: true
```

```

    schema:
      type: string
  (...)

```

### 5.2.9.14 Usage of the "tags" field

In an OpenAPI specification, all HTTP operations belonging to the same resource should include a "tags" field containing a same value, briefly describing that resource (e.g. using the name of the resource and its archetype). This results in all operations being grouped by the User Interface of OpenAPI tools, which helps with readability of the API documentation.

#### EXAMPLE:

```

openapi: 3.0.0
(...)
paths:
  /subscriptions/{subscriptionId}:
    get:
      summary: Retrieve an existing Individual subscription resource.
      operationId: GetIndSubsc
      tags:
        - Individual Subscription (Document)
    (...)
    put:
      summary: Request the update of an existing Individual Subscription resource.
      operationId: UpdateIndSubsc
      tags:
        - Individual Subscription (Document)
    (...)
    patch:
      summary: Request the modification of an existing Individual Subscription resource.
      operationId: ModifyIndSubsc
      tags:
        - Individual Subscription (Document)
    (...)

```

### 5.2.10 Redirection handling

An HTTP request may be redirected to a different target entity.

Upon receipt of an HTTP request from the SCS/AS, when the SCEF redirects the HTTP request to a different target SCEF, the URI of the target SCEF towards which the request is redirected shall be given by the Location header field of the "307 Temporary Redirect" or "308 Permanent Redirect" response. The SCS/AS should then send the HTTP request towards the new target SCEF.

Upon receipt of a notification/callback request from the SCEF, when the SCS/AS redirects the notification/callback request to a different target SCS/AS, the URI of the target SCS/AS towards which the notification/callback request is redirected shall be given by the Location header field of the "307 Temporary Redirect" or "308 Permanent Redirect" response. The SCEF should then send the HTTP request towards the new target SCS/AS.

### 5.2.11 Support of Load and Overload Control

The Load Control mechanisms defined in clause 6.3 of 3GPP TS 29.500 [44] may be supported by T8 APIs with the following differences:

- The "Load Control based on load signalled via the NRF" mechanism defined in clause 6.3.2 of 3GPP TS 29.500 [44] shall not be supported; and
- The "Load Control based on LCI Header" mechanism defined in clause 6.3.3 of 3GPP TS 29.500 [44] may be supported with the following differences:
  - The Load Control "scope" and all the related provisions are not applicable;

- The "NF Service Consumer" corresponds to the sending entity (e.g. SCEF, SCS/AS, AF) of the message in T8 APIs and the "NF Service Producer" corresponds to the receiving entity (e.g. SCEF, SCS/AS, AF) of the message in T8 APIs;
- The provisions related to the SCP (Service Communication Proxy) and SEPP (Security Edge Protection Proxy) entities are not applicable; and
- The "3gpp-Sbi-Lci" custom HTTP header corresponds to the "Nbi-API-Lci" custom HTTP header defined in clause 5.2.8.3.4 for T8 APIs.
- The provisions and mechanisms using the NRF (i.e. 5GC NF Repository Function) are not applicable.

The Overload Control mechanisms defined in clause 6.4 of 3GPP TS 29.500 [44] may be supported by T8 APIs with the following differences:

- The "Overload Control based on HTTP status codes" mechanism defined in clause 6.4.2 of 3GPP TS 29.500 [44] may be supported with the following differences:
  - The "NF Service Consumer" corresponds to the sending entity (e.g. SCEF, SCS/AS, AF) of the message in T8 APIs and the "NF Service Producer" corresponds to the receiving entity (e.g. SCEF, SCS/AS, AF) of the message in T8 APIs;

and

- The "Overload Control based on OCI Header" mechanism defined in clause 6.4.3 of 3GPP TS 29.500 [44] may be supported with the following differences:
  - The Overload Control "scope" and all the related provisions are not applicable;
  - The "NF Service Consumer" corresponds to the sending entity (e.g. SCEF, SCS/AS, AF) of the message in T8 APIs and the "NF Service Producer" corresponds to the receiving entity (e.g. SCEF, SCS/AS, AF) of the message in T8 APIs;
  - The provisions related to the SCP (Service Communication Proxy) and SEPP (Security Edge Protection Proxy) entities are not applicable; and
  - The "3gpp-Sbi-Oci" custom HTTP header corresponds to the "Nbi-API-Oci" custom HTTP header defined in clause 5.2.8.3.5 for T8 APIs.
  - The provisions and mechanisms using the NRF (i.e. 5GC NF Repository Function) are not applicable.

## 5.2.12 Query parameters

The query component in a URI contains non-hierarchical data that, along with data in the path component, enables to filter the resources identified within the scope of the URI's scheme to a subset of the resources matching the query parameters. The query component is indicated by the first question mark ("?") character and terminated by a number sign("#") character or by the end of the URI. The syntax of the query component is specified in IETF RFC 3986 [7].

When a server receives a request with a query component, it shall parse the query string in order to identify the filters. The first question mark is used to be a separator and is not part of the query string. A query string is composed of a series of "key=value" pairs, separated by "&". If one query parameter contains more than one value, i.e. an array of data elements, then the values shall be separated by comma (",").

The behaviour of the server when receiving an HTTP/2 method with a query parameter which is of type array, and only some of the members in the array can be matched, depends on each API and the behaviour shall be clearly described.

When multiple query parameters are defined for a method on the resource, the logical 'AND' is the default logical relationship between the query parameters for this resource. If a different logical relationship between multiple query parameters is specified for a method on a resource in an API, then this logical relationship override the default logical relationship for this specific method on the concerned resource in that API. If multiple query parameters are defined for a method on a resource in an API, but there is no need to specify any logical relationship between these query parameters, the concerned API shall explicitly state how to handle multiple query parameters.

## 5.2.13 Vendor-specific extensions

### 5.2.13.1 General

The vendor specific extensions specified in the below clauses are mechanisms for the APIs to re-use. The applicability of these mechanisms for specific 3GPP Northbound and application layer APIs is specified in the respective API specifications.

### 5.2.13.2 Vendor-specific extensions to the data model

Vendor-specific extensions for information elements may be generally supported in the 3GPP northbound and application layer APIs by reusing the same vendor-specific extensions mechanism defined for 5GC APIs in clause 6.6.3 of 3GPP TS 29.500 [44].

In the 3GPP northbound and application layer APIs, the vendor may alternatively be identified by setting the placeholder "nnnnn" in the vendor-specific member name to a domain name registered to the vendor, or a URN from the URN space managed by the vendor.

**NOTE:** The global uniqueness of the domain name or URN, when used to set the placeholder "nnnnn" in the vendor-specific member name, has to be guaranteed.

An example for the IANA-assigned enterprise code to identify the vendor is:

**EXAMPLE 1:** The vendor-specific member name for vendor "3GPP" based on IANA enterprise number would be:

```
"vendorSpecific-010415": {  
  ...  
}
```

Examples for the additional alternatives to identify the vendor are:

**EXAMPLE 2:** The vendor-specific member name for vendor "3GPP" based on domain name would be:

```
"vendorSpecific-3gpp.org": {  
  ...  
}
```

**EXAMPLE 3:** The vendor-specific member name for vendor "3GPP" based on URN would be:

```
"vendorSpecific-urn:3gpp:example": {  
  ...  
}
```

**NOTE:** The preferred naming scheme (for the "nnnnn" placeholder) for vendor-specific member names is the one based on the IANA-assigned enterprise code defined in clause 6.6.3 of 3GPP TS 29.500 [44].

### 5.2.13.3 Vendor-specific query parameters

Vendor-specific extensions to the query component of an HTTP request may be supported in the 3GPP northbound and application layer APIs by allowing the provisioning of vendor-specific query parameters in order to support additional vendor-specific filtering criteria. Whether an operation (e.g., using the HTTP GET method) on a specific resource of a 3GPP northbound or application layer API shall support the processing of vendor-specific query parameters shall be explicitly specified (within the corresponding resource or custom operation definition clauses) in the definition of this API operation in the technical specification where it is defined. This pattern applies to querying resources of "collection" or "store" archetype.

A vendor-specific query parameter shall be encoded as follows:

- The query parameter name shall start with "vend-spec" followed by the actual name of the query parameter, i.e., "vend-spec-<query parameter name>".
- The query parameter value shall be encoded as a JSON object containing two attributes as defined in Table 5.2.13.2-1, wherein:

- the "target" attribute is a JSON pointer (as per RFC 6901 [70]) towards the targeted attribute in the targeted resource representation; and
- the "value" attribute contains the actual value of the query parameter that is to be used for filtering and shall hence be encoded in the same way as the attribute in the resource representation that it targets.

**Table 5.2.13.2-1: Vendor-specific query parameter value content definition**

Attribute name	Data type	P	Cardinality	Description	Applicability
target	string	M	1	Contains the JSON pointer (as per RFC 6901 [70]) to the attribute in the resource representation that the provided vendor-specific query parameter is targeting.	
value	<Any simple or structured data structure>	M	1	Contains the vendor-specific query parameter value.	

**EXAMPLE 1:** Assuming that vendor-specific query parameters are supported for the MonitoringEvent API, if an authorized service consumer wants to retrieve the representations of the "Individual Monitoring Event Subscription" resources that contain a specific value (e.g., 6) for the "maximumNumberOfReports" attribute, then it can send a GET request using the following vendor-specific query parameter:

```
GET {apiRoot}/3gpp-monitoring-event/v1/{scsAsId}/subscriptions?vend-spec-max-reports={"target": "/maximumNumberOfReports", value: "6"}
```

**EXAMPLE 2:** Assuming that vendor-specific query parameters are supported for the MonitoringEvent API, if within the representations of the "Individual Monitoring Event Subscription" resources, a vendor-specific extension to the data model is provided by an AF via the "vendorSpecific-010415" attribute as specified in clause 5.2.13.1 and contains additional/alternative target location accuracy values within the "addAccuracy" attribute, and an authorized service consumer wants to retrieve the representations of those "Individual Monitoring Event Subscription" resources that contain a specific value for the "addAccuracy" attribute, then it can send a GET request using the following vendor-specific query parameter:

```
GET {apiRoot}/3gpp-monitoring-event/v1/{scsAsId}/subscriptions?vend-spec-accuracy={"target": "/vendorSpecific-010415/addAccuracy", value: "CELL_OR_TA"}
```

## 5.3 MonitoringEvent API

### 5.3.1 Overview

The MonitoringEvent API is a RESTful API that allows the SCS/AS to subscribe to notifications about specific events in 3GPP networks. It also allows the SCEF to report the event by sending notifications to the authorised users when the corresponding event is detected. The API also allows the SCEF to indicate the removal of a previously configured monitoring request. The MonitoringEvent API defines a set of data models, resources and the related procedures for the creation and management of monitoring event subscriptions. The corresponding JSON schema for the representation of the resources and operations defined by the MonitoringEvent API is provided in its complete form in Annex A.3.

### 5.3.2 Data model

#### 5.3.2.1 Resource data types

##### 5.3.2.1.1 Introduction

This clause defines data structures to be used in resource representations, including subscription resources.



Table 5.3.2.1.1-1 specifies data types re-used by the MonitoringEvent API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the MonitoringEvent API.

**Table 5.3.2.1.1-1: MonitoringEvent API re-used Data Types**

Data type	Reference	Comments
2DRelativeLocation	3GPP TS 29.572 [42]	Represents 2D local co-ordinates with origin corresponding to another known point.
3DRelativeLocation	3GPP TS 29.572 [42]	Represents 3D local co-ordinates with origin corresponding to another known point.
AccuracyFulfilmentIndicator	3GPP TS 29.572 [42]	The indication whether the obtained location estimate satisfies the requested QoS or not.
AgeOfLocationEstimate	3GPP TS 29.572 [42]	Age of the location estimate for change of location type or motion type of Location deferred report.
Angle	3GPP TS 29.572 [42]	Indicates value of angle
ApplicationlayerId	3GPP TS 29.571 [45]	Represents the Application Layer ID.
CivicAddress	3GPP TS 29.572 [42]	Civic address.
CodeWord	3GPP TS 29.515 [65]	Code word.
DddTrafficDescriptor	3GPP TS 29.571 [45]	Traffic Descriptor of source of downlink data.
DIDataDeliveryStatus	3GPP TS 29.571 [45]	Traffic Descriptor of source of downlink data notifications.
Dnn	3GPP TS 29.571 [45]	Identifies a DNN.
Fqdn	3GPP TS 29.571 [45]	Identifies a FQDN.
GeographicArea	3GPP TS 29.572 [42]	Identifies the geographical information of the user(s).
Gpsi	3GPP TS 29.571 [45]	Represents a GPSI.
IpAddr	3GPP TS 29.571 [45]	UE IP Address.
LdrType	3GPP TS 29.572 [42]	Location deferred requested event type.
LinearDistance	3GPP TS 29.572 [42]	This IE shall be present and set to true if a location estimate is required for motion event report.
LocationQoS	3GPP TS 29.572 [42]	Requested location QoS.
MacAddr48	3GPP TS 29.571 [45]	MAC Address.
MinorLocationQoS	3GPP TS 29.572 [42]	Minor Location QoS.
NetworkAreaInfo	3GPP TS 29.554 [50]	Identifies a network area information.
VelocityRequested	3GPP TS 29.572 [42]	Velocity of the target UE requested.
PatchItem	3GPP TS 29.571 [45]	Contains the list of changes to be made to a resource according to the JSON PATCH format specified in IETF RFC 6902 [67].
PduSessionInformation	3GPP TS 29.523 [70]	Represents PDU session identification information.
PositioningMethod	3GPP TS 29.572 [42]	Identifies the positioning method used to obtain the location estimate of the UE.
RangeDirection	3GPP TS 29.572 [42]	Represents the range and direction between two points.
RangingSIResult	3GPP TS 29.572 [42]	Represents the requested result type for ranging and sidelink positioning
RelatedUe	3GPP TS 29.572 [42]	Represents information on the related UE for ranging and sidelink positioning
SACEventStatus	3GPP TS 29.571 [45]	Contains the network slice status information related to network slice admission control.
SACInfo	3GPP TS 29.571 [45]	Represents network slice admission control information to control the triggering of notifications or convey network slice status information.
Snsai	3GPP TS 29.571 [45]	Contains a S-NSSAI.
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.3.4-1.
ServiceIdentiy	3GPP TS 29.515 [65]	Service identity.
SupportedGADShapes	3GPP TS 29.572 [42]	Supported Geographical Area Description shapes.
TrafficInformation	3GPP TS 29.520 [73]	Traffic information including UL/DL data rate and/or Traffic volume.
UcPurpose	3GPP TS 29.503 [63]	Represents the purpose of a user consent.
UInteger	3GPP TS 29.571 [45]	Represents an unsigned Integer.
Uncertainty	3GPP TS 29.572 [42]	Indicates value of uncertainty.
Uri	5.2.1.3.2	Represents a URI.
UserLocation	3GPP TS 29.571 [6]	Represents a user location.
VelocityEstimate	3GPP TS 29.572 [42]	UE velocity, if requested and available.

Table 5.3.2.1.1-2 specifies the data types defined for the MonitoringEvent API.

**Table 5.3.2.1.1-2: MonitoringEvent API specific Data Types**

Data type	Clause defined	Description	Applicability
Accuracy	5.3.2.4.7	Represents a desired granularity of accuracy for the requested location information.	Location_notification, eLCS, EDGEAPP
ApiCapabilityInfo	5.3.2.3.9	Represents the availability information of supported API.	API_support_capability_notification
AppliedParameterConfiguration	5.3.2.3.8	Represents the parameter configuration applied in the network.	Enhanced_parameter_config
AssociationType	5.3.2.4.6	Represents an IMEI or IMEISV to IMSI association.	Change_of_IMSI_IMEI_association_notification
ConsentRevocNotif	5.3.2.3.12	Represents the user consent revocation information conveyed in a user consent revocation notification.	UserConsentRevocation
ConsentRevoked	5.3.2.3.13	Represents the information related to revoked user consent(s).	UserConsentRevocation
FailureCause	5.3.2.3.6	Represents the reason of communication failure.	Communication_failure_notification
GroupMembListChanges	5.3.2.3.13	Represents information on the change(s) to a group members list.	GMEC
IdleStatusInfo	5.3.2.3.3	Represents the information relevant to when the UE transitions into idle mode.	Ue_reachability_notification, Availability_after_DDN_failure_notification
InterfaceIndication	5.3.2.4.10	Represents the network entity used for data delivery towards the SCS/AS.	Pdn_connectivity_status
LocationFailureCause	5.3.2.4.11	Represents the cause of location/positioning failure.	eLCS
LocationInfo	5.3.2.3.5	Represents the user location information.	Location_notification, eLCS
LocationType	5.3.2.4.5	Represents a location type.	Location_notification, Number_of_UEs_in_an_area_notification, Number_of_UEs_in_an_area_notification_5G, eLCS
MonitoringEventReport	5.3.2.3.2	Represents an event monitoring report.	
MonitoringEventReports	5.3.2.3.10	Represents one or multiple event monitoring report(s).	enNB
MonitoringEventSubscription	5.3.2.1.2	Represents a subscription to event(s) monitoring.	
MonitoringNotification	5.3.2.2.2	Represents an event monitoring notification.	
MonitoringType	5.3.2.4.3	Represents a monitoring event type.	
PdnConnectionInformation	5.3.2.3.7	Represents the PDN connection information of the UE.	Pdn_connectivity_status
PdnConnectionStatus	5.3.2.4.8	Represents the PDN connection status.	Pdn_connectivity_status
PdnType	5.3.2.4.9	Represents a PDN connection type.	
ReachabilityType	5.3.2.4.4	Represents a reachability type.	Ue_reachability_notification
SACRepFormat	5.3.2.4.13	Represents the NSAC reporting format.	NSAC
SubType	5.3.2.4.12	Represents a subscription type.	UAV
UavPolicy	5.3.2.3.11	Represents the policy information included in the UAV presence monitoring request.	UAV

UePerLocationReport	5.3.2.3.4	Represents the number of UEs found at the indicated location.	Number_of_UEs_in_an_area_notification, Number_of_UEs_in_an_area_notification_5G
UpCumEvtRep	5.3.2.3.18	Represents the cumulative event report for events reported via user plane.	eLCS_en
UpLocRepAddrAfRm	5.3.2.3.17	Represents the user plane addressing information.	eLCS_en

#### 5.3.2.1.2 Type: MonitoringEventSubscription

This type represents a subscription to monitoring an event. The same structure is used in the subscription request and subscription response.

**Table 5.3.2.1.2-1: Definition of type MonitoringEventSubscription**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 3)
self	Link	0..1	Link to the resource "Individual Monitoring Event Subscription". This parameter shall be supplied by the SCEF in HTTP responses.	
supportedFeatures	SupportedFeatures	0..1	Used to negotiate the supported optional features of the API as described in clause 5.2.7. This attribute shall be provided in the POST request and in the response of successful resource creation.	
mtcProviderId	string	0..1	Identifies the MTC Service Provider and/or MTC Application. (NOTE 7)	
applds	array(string)	0..N	Contains the Application Identifier(s). (NOTE 16)	AppDetection_5G
externalId	ExternalId	0..1	Identifies a user as defined in Clause 4.6.2 of 3GPP TS 23.682 [2]. This attribute may also be present in a monitoring event subscription response message, if the "UEId_retrieval" feature is supported and the corresponding request message includes the "ueIpAddr" attribute or the "ueMacAddr" attribute. (NOTE 1) (NOTE 5)	
msisdn	Msisdn	0..1	Identifies the MS internal PSTN/ISDN number allocated for a UE. (NOTE 1) (NOTE 5)	
addedExternalIds	array(ExternalId)	0..N	Indicates addition of the external Identifier(s) within the active group.	Partial_group_modification
addedMsisdns	array(Msisdn)	0..N	Indicates addition of the MSISDN(s) within the active group.	Partial_group_modification
excludedExternalIds	array(ExternalId)	0..N	Indicates cancellation of the external Identifier(s) within the active group.	Partial_group_modification
excludedMsisdns	array(Msisdn)	0..N	Indicates cancellation of the MSISDN(s) within the active group.	Partial_group_modification
externalGroupId	ExternalGroupId	0..1	Identifies a user group as defined in Clause 4.6.2 of 3GPP TS 23.682 [2]. (NOTE 1) (NOTE 6)	
addExtGroupIds	array(ExternalGroupId)	0..N	Identifies user groups as defined in Clause 4.6.2 of 3GPP TS 23.682 [2]. (NOTE 1) (NOTE 6)	Number_of_UEs_in_an_area_notification, Number_of_UEs_in_an_area_notification_5G
ipv4Addr	Ipv4Addr	0..1	Identifies the Ipv4 address. (NOTE 1)	Location_notification, Communication_failure_notification
ipv6Addr	Ipv6Addr	0..1	Identifies the Ipv6 address. (NOTE 1)	Location_notification, Communication_failure_notification

dnn	Dnn	0..1	<p>Identifies a DNN, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only.</p> <p>This attribute shall be present when the "AppDetection_5G" feature is supported and the "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "APPLICATION_START" or "APPLICATION_STOP".</p> <p>(NOTE 8) (NOTE 16)</p>	Session_Management_Enhancement, UEId_retrieval, AppDetection_5G
notificationDestination	Link	1	An URI of a notification destination that T8 message shall be delivered to.	
requestTestNotification	boolean	0..1	<p>Set to "true" by the SCS/AS to request the SCEF to send a test notification as defined in clause 5.2.5.3.</p> <p>Set to "false" by the SCS/AS indicates not request SCEF to send a test notification</p> <p>Default "false" if omitted.</p>	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	0..1	Configuration parameters to set up notification delivery over Websocket protocol as defined in clause 5.2.5.4.	Notification_websocket
monitoringType	MonitoringType	1	Enumeration of monitoring type. Refer to clause 5.3.2.4.3.	
maximumNumberOfReports	integer	0..1	<p>Identifies the maximum number of event reports to be generated by the HSS, MME/SGSN as specified in clause 5.6.0 of 3GPP TS 23.682 [2].</p> <p>(NOTE 2, NOTE 9, NOTE 13)</p> <p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to (or contains) the "NUM_OF_REGD_UES" or "NUM_OF_ESTD_PDU_SESSIONS" values, this attribute may also be provided with a value of 1 to indicate that one-time reporting of the network slice status information is requested by the AF.</p>	
monitorExpireTime	DateTime	0..1	<p>Identifies the absolute time at which the related monitoring event request is considered to expire, as specified in clause 5.6.0 of 3GPP TS 23.682 [2].</p> <p>When the "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to either "NUM_OF_REGD_UES" or "NUM_OF_ESTD_PDU_SESSIONS", this attribute shall be absent in the response to a one-time reporting monitoring subscription request.</p> <p>(NOTE 2)</p>	

repPeriod	DurationSec	0..1	Identifies the periodic time for the event reports. (NOTE 8, NOTE 9, NOTE 13)  If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "NUM_OF_REGD_UES" or "NUM_OF_ESTD_PDU_SESSIONS", this attribute may be provided. When provided, it also indicates that periodic reporting of the network slice status information is requested by the AF.	
groupReportGuardTime	DurationSec	0..1	Identifies the time for which the SCEF can aggregate the monitoring event reports detected by the UEs in a group and report them together to the SCS/AS, as specified in clause 5.6.0 of 3GPP TS 23.682 [2].	
maximumDetectionTime	DurationSec	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOSS_OF_CONNECTIVITY", this parameter may be included to identify the maximum period of time after which the UE is considered to be unreachable.	Loss_of_connectivity_notification
reachabilityType	ReachabilityType	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "UE_REACHABILITY", this parameter shall be included to identify whether the request is for "Reachability for SMS" or "Reachability for Data".	Ue-reachability_notification
maximumLatency	DurationSec	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "UE_REACHABILITY", this parameter may be included to identify the maximum delay acceptable for downlink data transfers.	Ue-reachability_notification
maximumResponseTime	DurationSec	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "UE_REACHABILITY", this parameter may be included to identify the length of time for which the UE stays reachable to allow the SCS/AS to reliably deliver the required downlink data.	Ue-reachability_notification
suggestedNumberOfDIPackets	integer	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "UE_REACHABILITY", this parameter may be included to identify the number of packets that the serving gateway shall buffer in case that the UE is not reachable.	Ue-reachability_notification
idleStatusIndication	boolean	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "UE_REACHABILITY" or "AVAILABILITY_AFTER_DDN_FAILURE", this parameter may be included to indicate the notification of when a UE, for which PSM is enabled, transitions into idle mode.  - "true": indicate enabling of notification - "false": indicate no need to notify  Default: "false" if omitted.	Ue-reachability_notification, Availability_after_DDN_failure_notification, Availability_after_DDN_failure_notification_enhancement



locationType	LocationType	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING" or "NUMBER_OF_UES_IN_AN_AREA", this parameter shall be included to identify whether the request is for Current Location, Initial Location or Last known Location. (NOTE 4)	Location_notification, Number_of_UEs_in_an_area_notification, Number_of_UEs_in_an_area_notification_5G, eLCS
accuracy	Accuracy	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING", this parameter may be included to identify the desired level of accuracy of the requested location information, as described in clause 4.9.2 of 3GPP TS 23.682 [2]. (NOTE 10, NOTE 11) For 5G, if the eLCS feature is not supported, the default value is "TA_RA".	Location_notification, eLCS
minimumReportInterval	DurationSec	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING", this parameter may be included to identify a minimum time interval between Location Reporting notifications. If the "ldrType" attribute is present and set to "ENTERING_INTO_AREA", "LEAVING_FROM_AREA", "BEING_INSIDE_AREA" or "MOTION", this attribute shall not be included if the maximumNumberOfReports attribute is present and set to one time event.	Location_notification, eLCS
maxRptExpireIntvl	DurationSec	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING", this parameter may be included to identify a maximum time interval between Location Reporting notifications. If the "ldrType" attribute is present and set to "ENTERING_INTO_AREA", "LEAVING_FROM_AREA", "BEING_INSIDE_AREA" or "MOTION", this attribute shall not be included if the maximumNumberOfReports attribute is present and set to one time event.	eLCS
samplingInterval	DurationSec	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING", this parameter may be included to identify the maximum time interval between consecutive evaluations by a UE of a trigger event.	eLCS

reportingLocEstInd	boolean	0..1	<p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING", this parameter may be included to indicate whether event reporting requires the location information.</p> <p>Set to "true", indicates the location estimation information shall be included in event reporting.</p> <p>Set to "false", indicates the location estimation information shall not be included in event reporting.</p> <p>Default: "false" if omitted.</p>	eLCS
linearDistance	LinearDistance	0..1	<p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING", this parameter may be included to indicate the linear(straight line) distance threshold for motion event reporting.</p>	eLCS
locQoS	LocationQoS	0..1	<p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING", this parameter may be included to indicate the expected location QoS requirement for an immediate MT-LR or deferred MT-LR.</p> <p>The "Multiple QoS Class" (i.e. the "lcsQoSClass" attribute within the LocationQoS data structure is set to "MULTIPLE_QOS") shall only be used when the "MULTIQOS" feature is supported.</p> <p>(NOTE 10)</p>	eLCS, MULTIQOS
svclId	ServiceIdentity	0..1	<p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING", this parameter may be included to indicate the service identity of AF.</p>	eLCS
ldrType	LdrType	0..1	<p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING", this parameter may be included to indicate the event type for a deferred MT-LR.</p>	eLCS
velocityRequested	VelocityRequested	0..1	<p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING", this parameter may be included to indicate if the velocity of the target UE is requested or not.</p>	eLCS
maxAgeOfLocEst	AgeOfLocationEstimate	0..1	<p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING", this parameter may be included to indicate acceptable maximum age of location estimate.</p>	eLCS

locTimeWindow	TimeWindow	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING", this parameter may be included to indicate the starting time and ending time for a deferred MT-LR.	eLCS
supportedGADShapes	array(SupportedGADShapes)	0..N	Supported Geographical Area Description shapes.	eLCS
codeWord	CodeWord	0..1	Code word.	eLCS
upLocRepIndAf	boolean	0..1	If the "LOCATION_REPORTING" value is set in either the "monitoringType" attribute and/or an array element of the "addnMonTypes" attribute, this attribute may be included to convey the indication of location reporting over user plane.  When present, this attribute shall be set as follows: "true": the location reporting over user plane is required. "false": the location reporting over user plane is not required. Default: "false" if omitted.	eLCS_en
upLocRepAddrAf	UpLocRepAddrAfRm	0..1	If the "upLocRepIndAf" attribute is present and set to "true", this attribute may be present to convey the AF's user plane addressing information to be used for location reporting over user plane.	eLCS_en
associationType	AssociationType	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "CHANGE_OF_IMSI_IMEI_ASSOCIATION", this parameter shall be included to identify whether the change of IMSI-IMEI or IMSI-IMEISV association shall be detected.	Change_of_IMSI_IMEI_association_notification
plmnIndication	boolean	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "ROAMING_STATUS", this parameter may be included to indicate the notification of UE's Serving PLMN ID.  - "true": The value shall be used to indicate enabling of notification; - "false": The value shall be used to indicate disabling of notification.  Default: "false" if omitted.	Roaming_status_notification
locationArea	LocationArea	0..1	If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "NUMBER_OF_UES_IN_AN_AREA", this parameter may be included to indicate the area within which the SCS/AS requests the number of UEs. If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "AREA_OF_INTEREST", this parameter shall be included to indicate the area within which the SCS/AS requests the presence status of a specific UE (i.e. UAV).	Number_of_UES_in_an_area_notification, UAV

locationArea5G	LocationArea5G	0..1	<p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "NUMBER_OF_UES_IN_AN_AREA", this parameter may be included to indicate the area within which the AF requests the number of UEs.</p> <p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "LOCATION_REPORTING", this parameter may be included to indicate the area within which the AF requests the area event of the target UE. (NOTE 12)</p> <p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "AREA_OF_INTEREST", this parameter shall be included to indicate the area within which the AF requests the presence status of a specific UE (i.e. UAV).</p>	Number_of_UEs_in_an_area_notification_5G, eLCS, UAV
dddTraDescriptors	array(DddTrafficDescriptor)	0..N	The traffic descriptor(s) of the downlink data source. May be included for event "DOWNLINK_DATA_DELIVERY_STATUSES" or "AVAILABILITY_AFTER_DDN_FAILURE".	Downlink_data_delivery_statuses_5G, Availability_after_DDN_failure_notification_enhancement
dddStati	array(DIDataDeliveryStatus)	0..N	May be included for event "DOWNLINK_DATA_DELIVERY_STATUSES". The subscribed stati (delivered, transmitted, buffered) for the event. If omitted all stati are subscribed.	Downlink_data_delivery_statuses_5G
monitoringEventReport	MonitoringEventReport	0..1	Identifies a monitoring event report which is sent from the SCEF to the SCS/AS.  (NOTE 18)	
apiNames	array(string)	0..N	<p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "API_SUPPORT_CAPABILITY", this parameter may be included. Each element identifies the name of an API.</p> <p>It shall set as {apiName} part of the URI structure for each T8 or N33 API as defined in the present specification or 3GPP TS 29.522 [62], respectively.</p> <p>This allows the SCS/AS to request the capability change for its interested APIs. If it is omitted, the SCS/AS requests to be notified for capability change for all APIs the SCEF+NEF supports.</p>	API_support_capability_notification

tgtNsThreshold	SACInfo	0..1	<p>Indicates the monitoring threshold value, for the network slice identified by the "snssai" attribute, upon which event notification(s) are triggered.</p> <p>This attribute may be provided if the "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "NUM_OF_REGD_UES" or "NUM_OF_ESTD_PDU_SESSIONS". When provided, it also indicates that threshold based reporting of the network slice status information is requested by the AF.</p> <p>(NOTE 13)</p>	NSAC
nsRepFormat	SACRepFormat	0..1	<p>Indicates the requested NSAC reporting format, i.e. "PERCENTAGE" or "NUMERICAL".</p> <p>It shall be provided only if the "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "NUM_OF_REGD_UES" or "NUM_OF_ESTD_PDU_SESSIONS" and periodic reporting is requested (i.e. the "repPeriod" attribute is provided instead of the "tgtNsThreshold" attribute) or one-time reporting is requested (i.e. the "maximumNumberOfReports" attribute is provided with a value of 1).</p>	NSAC
afServiceId	string	0..1	<p>Contains the identifier of a service on behalf of which the AF is sending the request.</p> <p>It may be provided by an untrusted AF and only if the "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to either "NUM_OF_REGD_UES" or "NUM_OF_ESTD_PDU_SESSIONS".</p> <p>(NOTE 15)</p>	NSAC

snsai	Snsai	0..1	<p>Indicates the S-NSSAI that the event monitoring subscription is targeting.</p> <p>This attribute may be provided if the "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "NUM_OF_REGD_UES" or "NUM_OF_ESTD_PDU_SESSIONS".</p> <p>This attribute may also be provided if the "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "PDN_CONNECTIVITY_STATUS" or "DOWNLINK_DATA_DELIVERY_STATU S".</p> <p>This attribute shall be present when the "AppDetection_5G" feature is supported and the "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "APPLICATION_START" or "APPLICATION_STOP".</p> <p>(NOTE 8) (NOTE 15) (NOTE 16)</p>	NSAC, Session_Management_Enhancement, UEId_retrieval, AppDetection_5G
immediateRep	boolean	0..1	<p>Indicates whether immediate reporting is requested or not.</p> <ul style="list-style-type: none"> <li>- "true": indicate that immediate reporting is requested.</li> <li>- "false": indicate that immediate reporting is not requested.</li> <li>- Default value: "false" if omitted.</li> </ul> <p>When the "NSAC" feature is supported, this attribute may be included if the "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to either "NUM_OF_REGD_UES" or "NUM_OF_ESTD_PDU_SESSIONS". (NOTE 13)</p> <p>When the "enNB1_5G" feature is supported, this attribute may be included if the SCS/AS requires immediate reporting of the subscribed event(s). (NOTE 4)</p>	NSAC, enNB1_5G
uavPolicy	UavPolicy	0..1	<p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "AREA_OF_INTEREST", this parameter may be included to indicate the 3GPP network to take corresponding action.</p>	UAV
subType	SubType	0..1	<p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "NUMBER_OF_UES_IN_AN_AREA", this parameter may be included to indicate the subscription type to be listed in the Event report.</p> <p>(NOTE 14)</p>	UAV

sesEstInd	boolean	0..1	<p>If "monitoringType" attribute (and/or an array element of the "addnMonTypes" attribute) is set to "NUMBER_OF_UES_IN_AN_AREA", this parameter may be included.</p> <p>If set to "true", it indicates that only UE's with "PDU session established for DNN(s) subject to aerial service" are to be listed in the Event report.</p> <p>If set to "false", it indicates that UE's with "PDU session established for DNN(s) subject to aerial service" are not to be listed in the Event report.</p> <p>Default: "false" if omitted.</p> <p>(NOTE 14)</p>	UAV
addnMonTypes	array(Monitoring Type)	0..N	<p>Contains additional monitoring types.</p> <p>(NOTE 17)</p>	enNB
addnMonEventReports	array(Monitoring EventReport)	0..N	<p>Contains additional monitoring event reports.</p> <p>This attribute may be present only in subscription creation/update responses and only if the "addnMonTypes" attribute is provided in the corresponding subscription creation/update request.</p> <p>(NOTE 18)</p>	enNB
ueIpAddr	IpAddr	0..1	UE IP address.	UEId_retrieval
ueMacAddr	MacAddr48	0..1	UE MAC address.	UEId_retrieval
revocationNotifUri	Uri	0..1	Contains the URI via which the AF desires to receive user consent revocation notifications.	UserConsentRevocation
reqRangSIRes	array(RangingSI Result)	0..N	Contains the type of result(s) requested for ranging and sidelink positioning.	Ranging_SL
relatedUes	map(RelatedUe)	0..N	<p>Contains a list of the related UE(s) for the ranging and sidelink positioning and the corresponding information.</p> <p>The key of the map shall be any unique string encoded value.</p>	Ranging_SL

- NOTE 1: One of the properties "externalId", "msisdN", "ipv4Addr", "ipv6Addr" or "externalGroupId" shall be included for features "Location\_notification" and "Communication\_failure\_notification";. One of the properties "externalId", "msisdN" or "externalGroupId" shall be included for feature "eLCS". "ipv4Addr" or "ipv6Addr" is required for monitoring via the PCRF for an individual UE. One of the properties "externalId", "msisdN" or "externalGroupId" shall be included for features "Pdn\_connectivity\_status", "Loss\_of\_connectivity\_notification", "Ue-reachability\_notification", "Change\_of\_IMSI\_IMEI\_association\_notification", "Roaming\_status\_notification", "Availability\_after\_DDN\_failure\_notification" and "Availability\_after\_DDN\_failure\_notification\_enhancement". When the "GMEC" feature is supported, the "externalGroupId" attribute shall be included to subscribe to the group members list change event reporting.
- NOTE 2: Inclusion of either "maximumNumberOfReports" (with a value higher than 1) or "monitorExpireTime" makes the Monitoring Request a Continuous Monitoring Request, where the SCEF sends Notifications until either the maximum number of reports or the monitoring duration indicated by the property "monitorExpireTime" is exceeded. The "maximumNumberOfReports" with a value 1 makes the Monitoring Request a One-time Monitoring Request. At least one of "maximumNumberOfReports" or "monitorExpireTime" shall be provided.
- NOTE 3: Properties marked with a feature as defined in clause 5.3.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.
- NOTE 4: In this release of the specification, for the "Number\_of\_UEs\_in\_an\_area\_notification" and "Number\_of\_UEs\_in\_an\_area\_notification\_5G" features, the "locationType" attribute shall be set to "LAST\_KNOWN\_LOCATION". For 5G, if the "locationType" attribute is set to "LAST\_KNOWN\_LOCATION", the "maximumNumberOfReports" attribute shall be set to 1 as a One-time Monitoring Request. For 5G, when the "enNB1\_5G" feature is supported and the "immediateRep" attribute is present set to "true" and outside the scope of the "NSAC" feature, then the "locationType" attribute shall be set to "LAST\_KNOWN\_LOCATION". For 5G, when the "enNB1\_5G" feature is supported and the "immediateRep" is either absent or present and set to "false" and outside the scope of the "NSAC" feature, then the "locationType" attribute shall be set to "CURRENT\_LOCATION".
- NOTE 5: The property does not apply for the features "Number\_of\_UEs\_in\_an\_area\_notification" and "Number\_of\_UEs\_in\_an\_area\_notification\_5G".
- NOTE 6: For the features "Number\_of\_UEs\_in\_an\_area\_notification" and "Number\_of\_UEs\_in\_an\_area\_notification\_5G", the property "externalGroupId" may be included for single group and "addExtGroupIds" may be included for multiple groups but not both.
- NOTE 7: The SCEF should check received MTC provider identifier and then the SCEF may:
- override it with local configured value and send it to HSS;
  - send it directly to the HSS; or
  - reject the monitoring configuration request.
- NOTE 8: This property is only applicable for the NEF.
- NOTE 9: The value of the "maximumNumberOfReports" attribute sets to 1 and the "repPeriod" attribute are mutually exclusive.
- NOTE 10: If the "eLCS" feature is supported, the "accuracy" attribute and "locQoS" attribute are mutually exclusive, and only the "GEO\_AREA" value is applicable for the "accuracy" attribute.
- NOTE 11: The value of "TWAN\_ID" is only applicable when the monitoring subscription is via the PCRF as described in clause 4.4.2.2.4.
- NOTE 12: If the "eLCS" feature is supported, only the "geographicAreas" attribute within the "locationArea5G" attribute is applicable.
- NOTE 13: For the "NSAC" feature, if the "maximumNumberOfReports" attribute is provided with a value of 1, the "repPeriod" attribute and the "tgtNsThreshold" attribute shall not be provided and the "immediateRep" attribute shall be provided and set to "true"; otherwise, either the "repPeriod" attribute or the "tgtNsThreshold" attribute shall be provided, and if immediate reporting is requested, the "immediateRep" attribute shall be provided and set to "true".
- NOTE 14: For the feature "UAV", the event "Number of UEs present in a geographical area" is used, where "subType" indication and/or "sesEstInd" may be used as event filters.
- NOTE 15: For the "NSAC" feature, the "snssai" and "afServiceId" attributes are mutually exclusive.
- NOTE 16: Void.
- NOTE 17: When the "enNB" feature is supported and the "addnMonTypes" attribute is present and contains at least one array element, then this attribute shall not contain an array element set to the same value as the "monitoringType" attribute.
- NOTE 18: When the "enNB" feature is supported, the "monitoringEventReport" is present and the "addnMonEventReports" attribute is present and contains at least one array element, then the "addnMonEventReports" attribute shall not contain an array element set to the same value as the "monitoringEventReport" attribute.



## 5.3.2.1.3 Void

## 5.3.2.2 Notification data types

## 5.3.2.2.1 Introduction

This clause defines data structures to be used in notifications.

## 5.3.2.2.2 Type: MonitoringNotification

This data type represents a monitoring notification which is sent from the SCEF to the SCS/AS.

**Table 5.3.2.2-1: Definition of type MonitoringNotification**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
subscription	Link	1	Link to the subscription resource to which this notification is related.	
configResults	array(ConfigResult)	0..N	Each element identifies a notification of grouping configuration result.	
monitoringEventReports	array(MonitoringEventReport)	0..N	Each element identifies a monitoring event report.	
addedExternalIds	array(ExternalId)	0..N	Identifies the added external Identifier(s) within the active group via the "externalGroupId" attribute within the MonitoringEventSubscription data type.	Partial_group_modification
addedMsisdns	array(Msisdn)	0..N	Identifies the added MSISDN(s) within the active group via the "externalGroupId" attribute within the MonitoringEventSubscription data type.	Partial_group_modification
cancelExternalIds	array(ExternalId)	0..N	Identifies the cancelled external Identifier(s) within the active group via the "externalGroupId" attribute within the MonitoringEventSubscription data type.	Partial_group_modification
cancelInd	Boolean	0..1	Indicates whether to request to cancel the corresponding monitoring subscription. Set to false or omitted otherwise.	
cancelMsisdns	array(Msisdn)	0..N	Identifies the cancelled MSISDN(s) within the active group via the "externalGroupId" attribute within the MonitoringEventSubscription data.	Partial_group_modification
appliedParam	AppliedParameterConfiguration	0..1	Indicates the applied parameter configuration in the network. For the attributes included in AppliedParameterConfiguration data type, the "maximumLatency" and "maximumResponseTime" attributes require the "Ue-reachability_notification" feature support, and the "maximumDetectionTime" attribute requires the "Loss_of_connectivity_notification" feature support.	Enhanced_param_config
NOTE:	Properties marked with a feature as defined in subclause 5.3.4 are applicable as described in subclause 5.2.7. If no features are indicated, the related property applies for all the features.			

## 5.3.2.3 Referenced structured data types

## 5.3.2.3.1 Introduction

This clause defines structured data types that are referenced from data structures defined in the previous clauses.

#### 5.3.2.3.2 Type: MonitoringEventReport

This data type represents a monitoring event notification which is sent from the SCEF to the SCS/AS.

**Table 5.3.2.3.2-1: Definition of type MonitoringEventReport**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
imeiChange	AssociationType	0..1	If "monitoringType" is "CHANGE_OF_IMSI_IMEI_ASSOCIATION", this parameter shall be included to identify the event of change of IMSI-IMEI or IMSI-IMEISV association is detected.  Refer to 3GPP TS 29.336 [11] Clause 8.4.22.	Change_of_IMSI_IMEI_association_notification
externalId	ExternalId	0..1	External identifier.  This attribute may also be present in the monitoring event subscription one-time response message, if the "UEId_retrieval" feature is supported and the corresponding request message includes the "ueIpAddr" attribute or the "ueMacAddr" attribute. (NOTE 2)	
appId	string	0..1	Contains the identifier of the detected application. (NOTE 4)	AppDetection_5G
pduSessInfo	PduSessionInformation	0..1	Represents the PDU session information related to the detected application.  If "monitoringType" is "APPLICATION_START" and/or "APPLICATION_STOP", this attribute shall be present, if available, to indicate the application traffic detection details.	AppDetection_5G
idleStatusInfo	IdleStatusInfo	0..1	If "idleStatusIndication" in the "MonitoringEventSubscription" sets to "true", this parameter shall be included to indicate the information when the UE transitions into idle mode.	Ue-reachability_notification, Availability_after_DDN_failure_notification
locationInfo	LocationInfo	0..1	If "monitoringType" is "LOCATION_REPORTING", this parameter shall be included to indicate the user location related information.	Location_notification, eLCS
locFailureCause	LocationFailureCause	0..1	Indicates the location positioning failure cause.	eLCS
lossOfConnectReason	integer	0..1	If "monitoringType" is "LOSS_OF_CONNECTIVITY", this parameter shall be included if available to identify the reason why loss of connectivity is reported.  Refer to 3GPP TS 29.336 [11] Clause 8.4.58.	Loss_of_connectivity_notification
unavailPerDur	DurationSec	0..1	If "monitoringType" is "LOSS_OF_CONNECTIVITY", then this parameter shall be included if available to identify the UE's Unavailability Period Duration.	Loss_of_connectivity_notification_5G

maxUEAvailabilityTime	DateTime	0..1	If "monitoringType" is "UE_REACHABILITY", this parameter may be included to identify the timestamp until which a UE using a power saving mechanism is expected to be reachable for SM delivery.  Refer to Clause 5.3.3.22 of 3GPP TS 29.338 [34].	Ue-reachability_notification
msisdn	Msisdn	0..1	Identifies the MS internal PSTN/ISDN number.  (NOTE 2)	
monitoringType	MonitoringType	1	Identifies the type of monitoring type as defined in clause 5.3.2.4.3.	
uePerLocationReport	UePerLocationReport	0..1	If "monitoringType" is "NUMBER_OF_UES_IN_AN_AREA", this parameter shall be included to indicate the number of UEs found at the location. If "subType" indicates "AERIAL_UE" subscription type, this parameter shall be included to indicate the number of UAV's found at the location.	Number_of_UEs_in_an_area_notification, Number_of_UEs_in_an_area_notification_5G
plmnId	PlmnId	0..1	If "monitoringType" is "ROAMING_STATUS" and "plmnIndication" in the "MonitoringEventSubscription" sets to "true", this parameter shall be included to indicate the UE's serving PLMN.	Roaming_status_notification
reachabilityType	ReachabilityType	0..1	If "monitoringType" is "UE_REACHABILITY", this parameter shall be included to identify the reachability of the UE.  Refer to 3GPP TS 29.336 [11] Clause 8.4.20.	Ue-reachability_notification
roamingStatus	boolean	0..1	If "monitoringType" is "ROAMING_STATUS", this parameter shall be set to "true" if the new serving PLMN is different from the HPLMN. Set to false or omitted otherwise.	Roaming_status_notification
failureCause	FailureCause	0..1	If "monitoringType" is "COMMUNICATION_FAILURE", this parameter shall be included to indicate the reason of communication failure.	Communication_failure_notification
eventTime	DateTime	0..1	Identifies when the event is detected or received.  Shall be included for each group of UEs.	
pdnConnInfoList	array(PdnConnectionInformation)	0..N	If "monitoringType" is "PDN_CONNECTIVITY_STATUS", this parameter shall be included to indicate the PDN connection details.	Pdn_connectivity_status
dddStatus	DIDataDeliveryStatus	0..1	If "monitoringType" is "DOWNLINK_DATA_DELIVERY_STATUS", this parameter shall be included to identify the downlink data delivery status detected by the network.	Downlink_data_delivery_status_5G

dddTrafDescriptor	DddTrafficDescriptor	0..1	If "monitoringType" is "DOWNLINK_DATA_DELIVERY_STATUS", this parameter shall be included to identify the downlink data descriptor impacted by the downlink data delivery status change.	Downlink_data_delivery_status_5G
maxWaitTime	DateTime	0..1	If "monitoringType" is "DOWNLINK_DATA_DELIVERY_STATUS", this parameter may be included to identify the time before which the data will be buffered.	Downlink_data_delivery_status_5G
apiCaps	array(ApiCapabilityInfo)	0..N	If "monitoringType" is "API_SUPPORT_CAPABILITY", this parameter shall be included to indicate the availability of all APIs supported by the serving network or the availability of interested APIs, indicated by the "apiNames" attribute in "MonitoringEventSubscription", supported by the serving network.  If no API is supported by the serving network, an empty apiCaps shall be provided.	API_support_capability_notification
nSStatusInfo	SACEventStatus	0..1	If the "monitoringType" attribute is set to "NUM_OF_REGD_UES" or "NUM_OF_ESTD_PDU_SESSIONS", this parameter shall be included to indicate the current network slice status information for the concerned network slice.  (NOTE 3)	NSAC
afServiceId	string	0..1	Contains the identifier of the service to which the NSAC reporting is related.  It shall be provided only if it is present in the related NSAC subscription request and the "monitoringType" attribute is set to either "NUM_OF_REGD_UES" or "NUM_OF_ESTD_PDU_SESSIONS".	NSAC
servLevelDevId	string	0..1	If "monitoringType" is "AREA_OF_INTEREST" or "NUMBER_OF_UES_IN_AN_AREA" and "subType" indicate "AERIAL_UE", this parameter may be included to identify the UAV.	UAV
uavPresInd	boolean	0..1	If "monitoringType" is "AREA_OF_INTEREST", this parameter shall be set to true if the specified UAV is in the monitoring area. Set to false or omitted otherwise.	UAV

groupMembListChanges	GroupMembListChanges	0..1	Contains information on the change(s) to the group members list.  This attribute shall be present only if the "monitoringType" attribute is set to "GROUP_MEMBER_LIST_CHANGE".	GMEC
sessInactiveTime	DurationSec	0..1	The value of the session inactivity timer.  This attribute shall be present only if the "monitoringType" attribute is set to "SESSION_INACTIVITY_TIME".	DataTransfer
trafficInfo	TrafficInformation	0..1	The value of the UL/DL data rate and/or Traffic volume.  This attribute shall be present only if the "monitoringType" attribute is set to "TRAFFIC_VOLUME" and/or "UL_DL_DATA_RATE".	DataTransfer
<p>NOTE 1: Properties marked with a feature as defined in clause 5.3.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.</p> <p>NOTE 2: Identifies the user for which the event occurred. At least one of the properties shall be included.</p> <p>NOTE 3: If the "eNSAC" feature is supported, the "SACEventStatus" data type shall include an indication to report either the current number of registered UEs or the current number of UEs with at least one PDU session/PDN connection.</p> <p>NOTE 4: When the "AppDetection_5G" feature is supported and the "monitoringType" attribute is set to either "APPLICATION_START" or "APPLICATION_STOP", the "appld" attribute shall be present only if the "applds" attribute within the corresponding subscription resource contains more than one array element (i.e., more than one application identifier).</p>				

5.3.2.3.3 Type: IdleStatusInfo

This data type represents the information when the UE transitions into idle mode. It is sent from the SCEF to the SCS/AS.

**Table 5.3.2.3.3-1: Definition of type IdleStatusInfo**

Attribute name	Data type	Cardinality	Description
activeTime	DurationSec	0..1	Identifies the active time granted to the UE. It shall be present if the idle status indication is requested by the SCS/AS with "idleStatusIndication" in the "monitoringEventSubscription" sets to "true".
edrxCycleLength	number	0..1	Identifies the power saving interval in unit of seconds. It shall be present if the idle status indication is requested by the SCS/AS with "idleStatusIndication" in the "monitoringEventSubscription" sets to "true".
suggestedNumberOfDIPackets	integer	0..1	Identifies the number of packets shall be buffered in the serving gateway. It shall be present if the idle status indication is requested by the SCS/AS with "idleStatusIndication" in the "monitoringEventSubscription" sets to "true".
idleStatusTimestamp	DateTime	0..1	Identifies the timestamp at which the UE transitions into idle mode. It shall be present if the idle status indication is requested by the SCS/AS with "idleStatusIndication" in the "monitoringEventSubscription" sets to "true".
periodicAUTimer	DurationSec	0..1	Identifies the subscribed periodic RAU/TAU timer value. It shall be present if the idle status indication is requested by the SCS/AS with "idleStatusIndication" in the "monitoringEventSubscription" sets to "true".

#### 5.3.2.3.4 Type: UePerLocationReport

This data type represents the number of UEs found at the indicated location information. It is sent from the SCEF to the SCS/AS.

**Table 5.3.2.3.4-1: Definition of type UePerLocationReport**

Attribute name	Data type	Cardinality	Description
ueCount	integer	1	Identifies the number of UEs.
externalIds	array(ExternalId)	0..N	Each element uniquely identifies a user. (NOTE)
msisdns	array(Msisdn)	0..N	Each element identifies the MS internal PSTN/ISDN number allocated for a UE. (NOTE)
servLevelDevIds	array(string)	0..N	Each element uniquely identifies a UAV.
NOTE: The property shall be included if received from the MME(s)/SGSN(s).			

#### 5.3.2.3.5 Type: LocationInfo

This data type represents the user location information which is sent from the SCEF to the SCS/AS.



**Table 5.3.2.3.5-1: Definition of LocationInfo data Type**

Attribute name	Data type	Cardinality	Description	Applicability
ageOfLocationInfo	DurationMin	0..1	Indicates the elapsed time since the last network contact of the UE. Refer to the Age-Of-Location-Information AVP as defined in clause 7.3.126 of 3GPP TS 29.272 [33].	
cellId	string	0..1	Indicates the Cell Global Identification of the user which identifies the cell the UE is registered. Refer to the Cell-Global-Identity AVP or E-UTRAN-Cell-Global-Identity AVP as defined in clause 7.3.119 or clause 7.3.117 of 3GPP TS 29.272 [33].  (NOTE 2)	
enodeBId	string	0..1	Indicates the eNodeB in which the UE is currently located. Refer to the eNodeB-ID AVP or Extended-eNodeB-ID AVP as defined in clause 7.3.198 or clause 7.3.218 of 3GPP TS 29.272 [33].	
routingAreaId	string	0..1	Identifies the Routing Area Identity of the user where the UE is located. Refer to the Routing-Area-Identity AVP as defined in clause 7.3.120 of 3GPP TS 29.272 [33].	
trackingAreaId	string	0..1	Identifies the Tracking Area Identity of the user where the UE is located. Refer to the Tracking-Area-Identity AVP as defined in clause 7.3.118 of 3GPP TS 29.272 [33].  (NOTE 3)	
plmnId	string	0..1	Identifies the PLMN Identity of the user where the UE is located. Refer to the Visited-PLMN-Id AVP as defined in clause 7.3.9 of 3GPP TS 29.272 [33].	
twanId	string	0..1	Identifies the TWAN Identity of the user where the UE is located.	
userLocation	UserLocation	0..1	Contains UE location information.  (NOTE 4)	enNB1
geographicArea	GeographicArea	0..1	Identifies a geographic area of the user where the UE is located.	
civicAddress	CivicAddress	0..1	The civic address of the target UE.	eLCS
positionMethod	PositioningMethod	0..1	Identifies the positioning method used to obtain the location estimate of the UE, if it is available at the LCS server and if needed.	eLCS
qosFulfillInd	AccuracyFulfillmentIndicator	0..1	Represents whether the requested accuracy is fulfilled or not.  (NOTE 1)	eLCS
ueVelocity	VelocityEstimate	0..1	UE velocity, if requested and available	eLCS
ldrType	LdrType	0..1	The IE may be included to indicate the type of event that triggers event notification.	eLCS
achievedQos	MinorLocationQoS	0..1	When present, this IE shall contain the achieved Location QoS Accuracy of the estimated location.  This IE shall be present if received.	MULTIQOS
relAppLayerId	ApplicationlayerId	0..1	Identifies the application layer ID of the related UE for ranging and sidelink positioning.	Ranging_SL
rangeDirection	RangeDirection	0..1	Contains the range and direction information.	Ranging_SL

twoDRelLoc	2DRelativeLocation	0..1	Contains the 2D relative location information.	Ranging_SL
threeDRelLoc	3DRelativeLocation	0..1	Contains the 3D relative location information.	Ranging_SL
relVelocity	VelocityEstimate	0..1	Contains the UE velocity relative to the UE identified via the "relAppLayerId" attribute.	Ranging_SL
upCumEvtRep	UpCumEvtRep	0..1	Contains the cumulative event report for events reported via user plane.	eLCS_en
<p>NOTE 1: For the eLCS feature, if "reportingLocEstInd" attribute is set to false or omitted during the monitoring event request, the location estimation information shall not be included. Otherwise, if the "reportingLocEstInd" attribute is set to true, and</p> <ul style="list-style-type: none"> <li>- if the "qosFulfillInd" attribute is set to "REQUESTED_ACCURACY_FULFILLED", the location estimate information may be included if the "lcsQoSClass" attribute within the "locQoS" attribute is set to "BEST_EFFORT"; or</li> <li>- if the "qosFulfillInd" attribute is set to "REQUESTED_ACCURACY_NOT_FULFILLED", the location estimate shall not be included if the "lcsQoSClass" attribute within "locQoS" attribute is set to "ASSURED".</li> </ul> <p>NOTE 2: For NEF, the context of the property shall refer to the Ecgi or Ncgi data type as defined in clause 5.4.4.5 or clause 5.4.4.6 of 3GPP TS 29.571 [45].</p> <p>NOTE 3: For NEF, the context of the property shall refer to the Tai data type as defined in clause 5.4.4 of 3GPP TS 29.571 [45].</p> <p>NOTE 4: When the "enNB1" feature is supported, the "userLocation" attribute may be provided instead of the "ageOfLocationInfo", "cellId", "enodeBId", "routingAreaId", "trackingAreaId", "plmnId" and "tvanId" attributes, when applicable.</p>				

### 5.3.2.3.6 Type: FailureCause

This data type represents the reason of communication failure. It shall comply with the provisions defined in table 5.3.2.3.6-1.

**Table 5.3.2.3.6-1: Definition of type FailureCause**

Attribute name	Data type	Cardinality	Description
bssgpCause	integer	0..1	Identifies a non-transparent copy of the BSSGP cause code. Refer to 3GPP TS 29.128 [12].
causeType	integer	0..1	Identify the type of the S1AP-Cause. Refer to 3GPP TS 29.128 [12].
gmmCause	integer	0..1	Identifies a non-transparent copy of the GMM cause code. Refer to 3GPP TS 29.128 [12].
ranapCause	integer	0..1	Identifies a non-transparent copy of the RANAP cause code. Refer to 3GPP TS 29.128 [12].
ranNasCause	string	0..1	Indicates RAN and/or NAS release cause code information, TWAN release cause code information or untrusted WLAN release cause code information. Refer to 3GPP TS 29.214 [10]. (NOTE)
s1ApCause	integer	0..1	Identifies a non-transparent copy of the S1AP cause code. Refer to 3GPP TS 29.128 [12].
smCause	integer	0..1	Identifies a non-transparent copy of the SM cause code. Refer to 3GPP TS 29.128 [12].
NOTE: If this property is provided in the "FailureCause" type, then other properties shall not be provided.			

### 5.3.2.3.7 Type: PdnConnectionInformation

This data type represents the PDN connection information of the UE.

**Table 5.3.2.3.7-1: Definition of type PdnConnectionInformation**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
status	PdnConnectionStatus	1	Identifies the PDN connection status.	
apn	string	0..1	Identifies the APN, it is depending on the SCEF local configuration whether or not this attribute is sent to the SCS/AS.	
pdnType	PdnType	1	PDN type	
interfaceInd	InterfaceIndication	0..1	Identifies the 3GPP network function used to communicate with the SCS/AS for non-IP PDN type.	
ipv4Addr	Ipv4Addr	0..1	Identifies the UE Ipv4 address.	
ipv6Addrs	array(Ipv6Addr)	0..N	Identifies the UE Ipv6 address. (NOTE 2)	
macAddrs	array(MacAddr48)	0..N	Identifies the UE MAC address(es) which is only available for the immediate report.	
NOTE 1: Properties marked with a feature as defined in clause 5.5.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				
NOTE 2: ipv6 prefix is included in this attribute if ipv6 full address is not available.				

### 5.3.2.3.8 Type: AppliedParameterConfiguration

This data type represents the applied parameter configuration in the network.

**Table 5.3.2.3.8-1: Definition of type AppliedParameterConfiguration**

Attribute name	Data type	Cardinality	Description	Applicability
externalIds	array(ExternalId)	0..N	Each element uniquely identifies a user. (NOTE)	
msisdns	array(Msisdn)	0..N	Each element identifies the MS internal PSTN/ISDN number allocated for a UE. (NOTE)	
maximumLatency	DurationSec	0..1	This parameter may be included to identify the maximum delay acceptable for downlink data transfers, which is applied in the network.	
maximumResponseTime	DurationSec	0..1	This parameter may be included to identify the length of time for which the UE stays reachable to allow the SCS/AS to reliably deliver the required downlink data, which is applied in the network.	
maximumDetectionTime	DurationSec	0..1	This parameter may be included to identify the maximum period of time after which the UE is considered to be unreachable, which is applied in the network.	
NOTE: If both are omitted, it means the change applies for the whole configuration (i.e. a single UE or a group of UEs).				

### 5.3.2.3.9 Type: ApiCapabilityInfo

This data type represents the availability information of a supported API.

**Table 5.3.2.3.9-1: Definition of type ApiCapabilityInfo**

Attribute name	Data type	Cardinality	Description	Applicability
apiName	string	1	Identifies the name of an available API provided by the SCEF+NEF. It shall set as {apiName} part of the URI structure for each T8 or N33 API as defined in the present specification or 3GPP TS 29.522 [62], respectively.	
suppFeat	SupportedFeatures	1	Indicates all the features supported by the API in the serving network, which provided by the SCEF+NEF.	

## 5.3.2.3.10 Type: MonitoringEventReports

**Table 5.3.2.3.10-1: Definition of type MonitoringEventReports**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
monitoringEventReports	array(MonitoringEventReport)	1..N	Contains a set of event monitoring reports.	
NOTE: Properties marked with a feature as defined in clause 5.3.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				

## 5.3.2.3.11 Type: UavPolicy

This data type represents the policy information included in the UAV presence monitoring request.

**Table 5.3.2.3.11-1: Definition of type UavPolicy**

Attribute name	Data type	Cardinality	Description	Applicability
uavMoveInd	boolean	1	Indicates the UAV moves in or moves out of the Area of Interest. Set to true if the UAV moves in the Area of Interest. Set to false if the UAV moves out of the Area of Interest.	
revokeInd	boolean	1	Indicates whether the connectivity between UAV and UAV controller shall be revoked. If set to true, the connectivity between UAV and UAV controller shall be revoked. Set to false otherwise.	

## 5.3.2.3.11 Type: ConsentRevocNotif

**Table 5.3.2.3.11-1: Definition of type ConsentRevocNotif**

Attribute name	Data type	Cardinality	Description	Applicability
subscriptionId	string	1	Contains the identifier of the subscription to which the notification is related.	
consentsRevoked	array(ConsentRevoked)	1..N	Indicates the revoked user consents.	

## 5.3.2.3.12 Type: ConsentRevoked

**Table 5.3.2.3.12-1: Definition of type ConsentRevoked**

Attribute name	Data type	Cardinality	Description	Applicability
ucPurpose	UcPurpose	1	Identifies the purpose of the revoked user consent.	
externalId	ExternalId	0..1	Indicates the user(s) for which user consent was revoked.  (NOTE)	
msisdn	Msisdn	0..1	Indicates the MSISDN(s) of the users for which user consent was revoked.  (NOTE)	
NOTE: One of the "externalId", or "msisdn" attributes shall be present.				

## 5.3.2.3.13 Type: GroupMembListChanges

**Table 5.3.2.3.13-1: Definition of type GroupMembListChanges**

Attribute name	Data type	Cardinality	Description	Applicability
addedUEs	array(Gpsi)	0..N	Identifies the UE(s) added to the group.	
removedUEs	array(Gpsi)	0..N	Identifies the UE(s) removed from the group.	
NOTE: At least one of the "addedUEs" attributes and the "removedUEs" attribute shall be provided.				

## 5.3.2.3.14 Void

## 5.3.2.3.15 Void

## 5.3.2.3.16 Void

## 5.3.2.3.17 Type: UpLocRepAddrAfRm

**Table 5.3.2.3.17-1: Definition of type UpLocRepAddrAfRm**

Attribute name	Data type	Cardinality	Description	Applicability
ipv4Adrs	array(Ipv4Addr)	0..N	Contains the IPv4 address(es) of the target.  (NOTE 1) (NOTE 2)	
ipv6Adrs	array(Ipv6Addr)	0..N	Contains the IPv6 address(es) of the target.  (NOTE 1) (NOTE 2)	
fqdn	Fqdn	0..1	Contains the FQDN of the target.  (NOTE 1)	
NOTE 1: At least one of these attributes shall be present.				
NOTE 2: In this release of the specification, there shall not be more than 16 array elements provided within this attribute.				

## 5.3.2.3.18 Type: UpCumEvtRep

**Table 5.3.2.3.18-1: Definition of type UpCumEvtRep**

Attribute name	Data type	Cardinality	Description	Applicability
upLocRepStat	UInteger	0..1	Contains the number of location event reports transferred over user plane since the last cumulative event report was sent.	

## 5.3.2.4 Referenced simple data types and enumerations

## 5.3.2.4.1 Introduction

This clause defines simple data types and enumerations that are referenced from data structures defined in the previous clauses. In addition, data types and enumerations defined in clause 5.2.1 can be referenced.

## 5.3.2.4.2 Simple data types

The simple data types defined in table 5.3.2.4.2-1 shall be supported.

**Table 5.3.2.4.2-1: Simple data types**

Type name	Description

## 5.3.2.4.3 Enumeration: MonitoringType

The enumeration MonitoringType represents a monitoring event type. It shall comply with the provisions defined in table 5.3.2.4.3-1.

Table 5.3.2.4.3-1: Enumeration MonitoringType

Enumeration value	Description	Applicability (NOTE 1)
LOSS_OF_CONNECTIVITY	The SCS/AS requests to be notified when the 3GPP network detects that the UE is no longer reachable for signalling or user plane communication	Loss_of_connectivity_notification
UE_REACHABILITY	The SCS/AS requests to be notified when the UE becomes reachable for sending either SMS or downlink data to the UE	Ue-reachability_notification
LOCATION_REPORTING	The SCS/AS requests to be notified of the current location or the last known location of the UE	Location_notification, eLCS
CHANGE_OF_IMSI_IMEI_ASSOCIATION	The SCS/AS requests to be notified when the association of an ME (IMEI(SV)) that uses a specific subscription (IMSI) is changed	Change_of_IMSI_IMEI_association_notification
ROAMING_STATUS	The SCS/AS queries the UE's current roaming status and requests to get notified when the status changes	Roaming_status_notification
COMMUNICATION_FAILURE	The SCS/AS requests to be notified of communication failure events	Communication_failure_notification
AVAILABILITY_AFTER_DDN_FAILURE	The SCS/AS requests to be notified when the UE has become available after a DDN failure	Availability_after_DDN_failure_notification, Availability_after_DDN_failure_notification_enhancement
NUMBER_OF_UES_IN_AN_AREA	The SCS/AS requests to be notified the number of UEs in a given geographic area	Number_of_UEs_in_an_area_notification, Number_of_UEs_in_an_area_notification_5G
PDN_CONNECTIVITY_STATUS	The SCS/AS requests to be notified when the 3GPP network detects that the UE's PDN connection is set up or torn down.	Pdn_connectivity_status
DOWNLINK_DATA_DELIVERY_STATUS	The AF requests to be notified when the 3GPP network detects that the downlink data delivery status is changed.	Downlink_data_delivery_status_5G
API_SUPPORT_CAPABILITY	The SCS/AS requests to be notified of the availability of support of service APIs.	API_support_capability_notification
NUM_OF_REGD_UES	The AF requests to be notified of the current number of registered UEs for a network slice.	NSAC
NUM_OF_ESTD_PDU_SESSIONS	The AF requests to be notified of the current number of established PDU Sessions for a network slice.	NSAC
AREA_OF_INTEREST	The SCS/AS requests to be notified when the UE (i.e. UAV) moves in or out of the geographic area.	UAV
GROUP_MEMBER_LIST_CHANGE	The AF requests to be notified of the changes to a group members list.	GMEC
APPLICATION_START	The AF requests to be notified when the start of application traffic has been detected.	AppDetection_5G
APPLICATION_STOP	The AF requests to be notified when the end of application traffic has been detected.	AppDetection_5G
SESSION_INACTIVITY_TIME	The AF requests to be notified of session inactivity time of the measured UE PDU Session.	DataTransfer
TRAFFIC_VOLUME	The AF requests to be notified of traffic volume of the measured UE.	DataTransfer
UL_DL_DATA_RATE	The AF requests to be notified of uplink and downlink data rate of the measured UE.	DataTransfer
NOTE 1: Properties marked with a feature as defined in clause 5.3.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		
NOTE 2: More monitoring types can be added in the future based on stage 2.		

#### 5.3.2.4.4 Enumeration: ReachabilityType

The enumeration ReachabilityType represents a reachability type. It shall comply with the provisions defined in table 5.3.2.4.4-1. If reachabilityType set to "SMS", the monitoring event request from SCS/AS shall be only for one-time monitoring request.



**Table 5.3.2.4.4-1: Enumeration ReachabilityType**

Enumeration value	Description	Applicability (NOTE)
SMS	The SCS/AS requests to be notified when the UE becomes reachable for sending SMS to the UE	Ue-reachability_notification
DATA	The SCS/AS requests to be notified when the UE becomes reachable for sending downlink data to the UE	Ue-reachability_notification
NOTE: Properties marked with a feature as defined in clause 5.3.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.		

#### 5.3.2.4.5 Enumeration: LocationType

The enumeration LocationType represents a location type. It shall comply with the provisions defined in table 5.3.2.4.5-1. If locationType set to "LAST\_KNOWN\_LOCATION", the monitoring event request from SCS/AS shall be only for one-time monitoring request.

**Table 5.3.2.4.5-1: Enumeration LocationType**

Enumeration value	Description	Applicability (NOTE)
CURRENT_LOCATION	The SCS/AS requests to be notified for current location	Location_notification, eLCS
LAST_KNOWN_LOCATION	The SCS/AS requests to be notified for last known location	Location_notification, Number_of_UEs_in_an_area_notification, Number_of_UEs_in_an_area_notification_5G
CURRENT_OR_LAST_KNOWN_LOCATION	The AF requests the current or last known location.	eLCS
INITIAL_LOCATION	The AF requests the initial location.	eLCS
NOTE: Properties marked with a feature as defined in clause 5.3.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.		

#### 5.3.2.4.6 Enumeration: AssociationType

The enumeration AssociationType represents an IMEI or IMEISV to IMSI association. It shall comply with the provisions defined in table 5.3.2.4.6-1.

**Table 5.3.2.4.6-1: Enumeration AssociationType**

Enumeration value	Description	Applicability (NOTE)
IMEI	The value shall be used when the change of IMSI-IMEI association shall be detected	Change_of_IMSI_IMEI_association_notification
IMEISV	The value shall be used when the change of IMSI-IMEISV association shall be detected	Change_of_IMSI_IMEI_association_notification
NOTE: Properties marked with a feature as defined in clause 5.3.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		

#### 5.3.2.4.7 Enumeration: Accuracy

The enumeration Accuracy represents a desired granularity of accuracy of the requested location information. It shall comply with the provisions defined in table 5.3.2.4.7-1.

**Table 5.3.2.4.7-1: Enumeration Accuracy**

Enumeration value	Description	Applicability (NOTE)
CGI_ECGI	The SCS/AS requests to be notified using cell level location accuracy.	
ENODEB	The SCS/AS requests to be notified using eNodeB level location accuracy.	
TA_RA	The SCS/AS requests to be notified using TA/RA level location accuracy.	
PLMN	The SCS/AS requests to be notified using PLMN level location accuracy.	
TWAN_ID	The SCS/AS requests to be notified using TWAN identifier level location accuracy.	
GEO_AREA	The SCS/AS requests to be notified using the geographical area accuracy.	
CIVIC_ADDR	The SCS/AS requests to be notified using the civic address accuracy.	EDGEAPP
NOTE 1: Properties marked with a feature as defined in clause 5.3.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		

#### 5.3.2.4.8 Enumeration: PdnConnectionStatus

The enumeration PdnConnectionStatus represents the PDN connection status. It shall comply with the provisions defined in table 5.3.2.4.8-1.

**Table 5.3.2.4.8-1: Enumeration PdnConnectionStatus**

Enumeration value	Description	Applicability (NOTE)
CREATED	The PDN connection is created.	Pdn_connectivity_status
RELEASED	The PDN connection is released.	Pdn_connectivity_status
NOTE: Properties marked with a feature as defined in clause 5.3.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		

#### 5.3.2.4.9 Enumeration: PdnType

The enumeration PdnType represents the PDN connection type. It shall comply with the provisions defined in table 5.3.2.4.9-1.

**Table 5.3.2.4.9-1: Enumeration PdnType**

Enumeration value	Description	Applicability (NOTE)
IPV4	PDN connection of IPv4 type	
IPV6	PDN connection of IPv6 type	
IPV4V6	PDN connection of IPv4v6 type	
NON_IP	PDN connection of non-IP type	
ETHERNET	PDN connection of Ethernet type	
NOTE: Properties marked with a feature as defined in clause 5.3.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		

#### 5.3.2.4.10 Enumeration: InterfaceIndication

The enumeration InterfaceIndication represents the network entity used for data delivery towards the SCS/AS. It shall comply with the provisions defined in table 5.3.2.4.10-1.

**Table 5.3.2.4.10-1: Enumeration InterfaceIndication**

Enumeration value	Description	Applicability (NOTE)
EXPOSURE_FUNCTION	SCEF is used for the PDN connection towards the SCS/AS.	Pdn_connectivity_status
PDN_GATEWAY	PDN gateway is used for the PDN connection towards the SCS/AS.	Pdn_connectivity_status
NOTE: Properties marked with a feature as defined in clause 5.3.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		

#### 5.3.2.4.11 Enumeration: LocationFailureCause

The enumeration LocationFailureCause represents the cause of location positioning failure. It shall comply with the provisions defined in table 5.3.2.4.11-1.

**Table 5.3.2.4.11-1: Enumeration LocationFailureCause**

Enumeration value	Description	Applicability
"POSITIONING_DENIED"	Positioning is denied.	
"UNSUPPORTED_BY_UE"	Positioning is not supported by UE.	
"NOT_REGISTERED_UE"	UE is not registered.	
"UNSPECIFIED"	Unspecified.	
"REQUESTED_AREA_NOT_ALLOWED"	The location request is rejected because the location area requested by the AF for area event reporting is not allowed (e.g., does not overlap with the allowed location areas for area event reporting).	eLCS_en

#### 5.3.2.4.12 Enumeration: SubType

The enumeration SubType represents a subscription type. It shall comply with the provisions defined in table 5.3.2.4.12-1.

**Table 5.3.2.4.12-1: Enumeration SubType**

Enumeration value	Description	Applicability
AERIAL_UE	The UE has Aerial subscription.	UAV

#### 5.3.2.4.13 Enumeration: SACRepFormat

**Table 5.3.2.4.13-1: Enumeration SACRepFormat**

Enumeration value	Description	Applicability
"NUMERICAL"	Indicates that the NSAC reporting should be done in numerical format.	
"PERCENTAGE"	Indicates that the NSAC reporting should be done in the format of a percentage.	

### 5.3.3 Resource structure

#### 5.3.3.1 General

All resource URIs of this API should have the following root:

**{apiRoot}/3gpp-monitoring-event/v1**

"apiRoot" is set as described in clause 5.2.4. "apiName" shall be set to "3gpp-monitoring-event" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:

**Table 5.3.3.1-1: Resources and methods overview**

Resource name	Resource URI	HTTP method	Meaning
Monitoring Event Subscriptions	/{scsAsId}/subscriptions	GET	Read all or queried subscriptions for a given SCS/AS
		POST	Create a new subscription of monitoring event
Individual Monitoring Event Subscription	/{scsAsId}/subscriptions/{subscriptionId}	PUT	Modify an existing subscription of monitoring event
		PATCH	Modifies an existing subscription of monitoring event.
		GET	Read a subscription of monitoring event
		DELETE	Delete a subscription of monitoring event

### 5.3.3.2 Resource: Monitoring Event Subscriptions

#### 5.3.3.2.1 Introduction

This resource allows an SCS/AS to read all of the active monitoring event subscriptions or create a new monitoring event subscription for the SCS/AS at the SCEF.

#### 5.3.3.2.2 Resource definition

Resource URI: {apiRoot}/3gpp-monitoring-event/v1/{scsAsId}/subscriptions

This resource shall support the resource URI variables defined in table 5.3.3.2.2-1.

**Table 5.3.3.2.2-1: Resource URI variables for resource "Monitoring Event Subscriptions"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.

#### 5.3.3.2.3 Resource methods

##### 5.3.3.2.3.1 GET

The GET method allows to read all or queried active subscriptions for a given SCS/AS. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.3.3.2.3.1-1 and table 5.3.3.2.3.1-2.

**Table 5.3.3.2.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks	Applicability
ip-addr	array(IpAddr)	0..N	Contains the IP address(es) of the requested UE(s). (NOTE 1, NOTE 2)	enNB
ip-domain	string	0..1	Contains the IPv4 address domain identifier. This query parameter may be present only if the "ip-addr" query parameter is also present and contains at least one array element including an IPv4 address.	enNB
mac-addr	array(MacAddr48)	0..N	Contains the MAC address(es) of the requested UE(s). (NOTE 1, NOTE 2)	enNB
NOTE 1: Either the "ip-addr" query parameter or the "mac-addr" query parameter may be provided at the same time.				
NOTE 2: If multiple array elements are provided within this query parameter, then each array element shall be treated as a separate query parameter.				

**Table 5.3.3.2.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	array(MonitoringEventSubscription)	0..N	200 OK	The subscription information for the SCS/AS in the request URI are returned.
	none		307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.3.3.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.3.3.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

### 5.3.3.2.3.2 PUT

This HTTP method is not supported for the resource.

5.3.3.2.3.3 PATCH

This HTTP method is not supported for the resource.

5.3.3.2.3.4 POST

The POST method creates a new subscription resource to monitor an event for a given SCS/AS. The SCS/AS shall initiate the HTTP POST request message and the SCEF shall respond to the message. The SCEF shall construct the URI of the created resource.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.3.3.2.3.4-1 and table 5.3.3.2.3.4-2.

**Table 5.3.3.2.3.4-1: URI query parameters supported by the POST method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.3.3.2.3.4-2: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	MonitoringEventSubscription	1	Parameters to register a subscription to notifications about monitoring event with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	MonitoringEventSubscription	1	201 Created	The subscription resource was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
	MonitoringEventReport	1	200 OK	The operation is successful, and corresponding monitoring event report is included. This is only applicable for the one-time monitoring request if report is available in the response.
	MonitoringEventReports	1	200 OK	The operation is successful and the corresponding monitoring event report(s) are included in the response body.  This response option is applicable only when the "enNB" feature is supported, the monitoring request is a one-time reporting request and the event reports are available at the SCEF.
	ProblemDetails	0..1	400 Bad Request	(NOTE 2)
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)
	ProblemDetails	0..1	404 Not Found	(NOTE 2)
	ProblemDetails	0..1	500 Internal Server Error	(NOTE 2)

NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

NOTE 2: Failure cases are described in clause 5.3.5.3.

**Table 5.3.3.2.3.4-3: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-monitoring-event/v1/{scsAsId}/subscriptions/{subscriptionId}

#### 5.3.3.2.3.5 DELETE

This HTTP method is not supported for the resource.

### 5.3.3.3 Resource: Individual Monitoring Event Subscription

#### 5.3.3.3.1 Introduction

This resource allows an SCS/AS to read, update or delete an active monitoring event subscription at the SCEF.

#### 5.3.3.3.2 Resource definition

Resource URI: {apiRoot}/3gpp-monitoring-event/v1/{scsAsId}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.2.3.2.2-1.

**Table 5.3.3.3.2-1: Resource URI variables for resource "Individual Monitoring Event Subscription"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
subscriptionId	string	Identifier of the subscription resource. The subscriptionId corresponds to the stage 2 TLTRI.

#### 5.3.3.3.3 Resource methods

##### 5.3.3.3.3.1 GET

The GET method allows to read an active subscription resource to obtain details of the subscription. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.3.3.3.3.1-1 and table 5.3.3.3.3.1-2.

**Table 5.3.3.3.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.3.3.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	MonitoringEventSubscription	1	200 OK	The subscription information related to the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.3.3.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.3.3.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.3.3.3.2 PUT

The PUT method modifies an existing subscription resource to update the subscription. The SCS/AS shall initiate the HTTP PUT request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.3.3.3.2-1 and table 5.3.3.3.2-2.

**Table 5.3.3.3.2-1: URI query parameters supported by the PUT method on this resource**

Name	Data type	Cardinality	Remarks
none specified			



**Table 5.3.3.3.2-2: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	MonitoringEventSubscription	1	Parameters to update a subscription to notifications about monitoring event with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	MonitoringEventSubscription	1	200 OK	The subscription was updated successfully and the representation of the subscription is returned.
	none		204 No Content	The subscription was updated successfully.
	none		307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.
	ProblemDetails	0..1	403 Forbidden	(NOTE 2, NOTE 3)
NOTE 1: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				
NOTE 2: The error case is only applicable for monitoring event configuration via PCRF.				
NOTE 3: Failure cases are described in clause 5.3.5.3.				

**Table 5.3.3.3.2-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.3.3.3.2-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.3.3.3.3 PATCH

The PATCH method allows the SCS/AS to modify an existing subscription resource, in order to notify the SCEF about the partial cancellation and/or partial addition of certain UE(s) within an active group. The SCS/AS shall initiate the HTTP PATCH message request with JSON Patch format signalled by the content type "application/json-patch+json".

This method shall support request and response data structures, and response codes, as specified in the table 5.3.3.3.3-1.

**Table 5.3.3.3.3-1: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	array(PatchItem)		1..N	Contains the list of changes to be made to an individual subscription resource, according to the JSON PATCH format specified in IETF RFC 6902 [67].
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The resource was modified successfully.
	none		307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 also apply.				

**Table 5.3.3.3.3-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.3.3.3.3-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.3.3.3.4 POST

This HTTP method is not supported for the resource.

#### 5.3.3.3.5 DELETE

The DELETE method deletes the related resource and terminates the related monitoring subscription. The SCS/AS shall initiate the HTTP DELETE request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.3.3.3.5-1 and table 5.3.3.3.5-2.

**Table 5.3.3.3.5-1: URI query parameters supported by the DELETE method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.3.3.3.5-2: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The subscription was terminated successfully.
	array(MonitoringEventReport)	1..N	200 OK	The subscription was terminated successfully, the monitoring event report(s) shall be included if received.
	none		307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				

**Table 5.3.3.3.5-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.3.3.3.5-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.3.3.4 Void

5.3.3A Notifications

5.3.3A.1 General

The notifications provided by the MonitoringEvent API are specified in this clause.

**Table 5.3.3A-1: Notifications overview**

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Monitoring Notification	{notificationDestination}	POST	Sent from the SCEF to the SCS/AS about the notification of grouping configuration result, detected monitoring event report(s) or notify the SCS/AS to cancel a monitoring subscription
User Consent Revocation Notification	{revocationNotifUri}	POST	The user consent revocation notification from the NEF to the AF to inform about the revocation of user consent for one or several UE(s).

### 5.3.3A.2 Monitoring Notification

#### 5.3.3A.2.1 Description

The Monitoring Notification allows the SCEF to send notification about grouping configuration result, monitoring event report(s) or a monitoring subscription cancellation to the SCS/AS.

#### 5.3.3A.2.2 Target URI

The Callback URI "{notificationDestination}" shall be used with the callback URI variables defined in table 5.3.3A.2.2-1.

**Table 5.3.3A.2.2-1: Callback URI variables**

Name	Data type	Definition
notificationDestination	Link	Callback reference provided by the SCS/AS during creation or modification of the monitoring event subscription.

#### 5.3.3A.2.3 Standard Methods

##### 5.3.3A.2.3.1 Notification via POST

The HTTP POST method reports the notification for a monitoring subscription. The SCEF shall initiate the HTTP POST request message and the SCS/AS shall respond to the message.

This method shall support the request data structures specified in table 5.3.3A.2.3.1-1 and the response data structures and response codes specified in table 5.3.3A.2.3.1-2.

**Table 5.3.3A.2.3.1-1: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
MonitoringNotification	1	The monitoring notification provided by the SCEF.

**Table 5.3.3A.2.3.1-2: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
none		204 No Content	The monitoring notification is received successfully.
none		307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.3.3A.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.3.3A.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

### 5.3.3A.2.3.2 Notification via Websocket

If supported by both SCS/AS and SCEF and successfully negotiated, the MonitoringNotification may alternatively be delivered through the Websocket mechanism as defined in subclause 5.2.5.4.

## 5.3.3A.3 User Consent Revocation Notification

### 5.3.3A.3.1 Description

The User Consent Revocation Notification is used by the NEF to report the revocation of user consent for one or several UE(s) to the AF.

### 5.3.3A.3.2 Target URI

The Callback URI "{revocationNotifUri}" shall be used with the the callback URI variables defined in table 5.3.3A.3.2-1.

**Table 5.3.3A.3.2-1: Callback URI variables**

Name	Data type	Definition
revocationNotifUri	Uri	Callback reference provided by the AF during the creation or update/modification of the subscription as defined in clauses 5.3.3.2.3.4 and 5.3.3.3.3.2 or 5.3.3.3.3.3.

### 5.3.3A.3.3 Operation Definition

#### 5.3.3A.3.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.3.3A.3.3.1-1 and the response data structures and response codes specified in table 5.3.3A.3.3.1-2.

**Table 5.3.3A.3.3.1-1: Data structures supported by the POST Request Body on this resource**

Data type	Cardinality	Description
ConsentRevocNotif	1	Contains the user consent revocation information.

**Table 5.3.3A.3.3.1-2: Data structures supported by the POST Response Body on this resource**

Data type	Cardinality	Response codes	Description
n/a		204 No Content	Successful case. The user consent revocation notification is successfully received.
n/a		307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a		308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

**Table 5.3.3A.3.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	Cardinality	Description
Location	string	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

**Table 5.3.3A.3.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	Cardinality	Description
Location	string	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

#### 5.3.3A.3.3.2 Notification via Websocket

If supported by both the AF and the NEF and successfully negotiated, the User Consent Revocation Notification may alternatively be delivered via the Websocket mechanism, as defined in clause 5.2.5.4 of 3GPP TS 29.122 [4].

### 5.3.4 Used Features

The table below defines the features applicable to the MonitoringEvent API. Those features are negotiated as described in clause 5.2.7.

**Table 5.3.4-1: Features used by MonitoringEvent API**

Feature Number	Feature	Description
1	Loss_of_connectivity_notification	The SCS/AS is notified when the 3GPP network detects that the UE is no longer reachable for signalling or user plane communication
2	Ue-reachability_notification	The SCS/AS is notified when the UE becomes reachable for sending either SMS or downlink data to the UE
3	Location_notification	The SCS/AS is notified of the current location or the last known location of the UE
4	Change_of_IMSI_IMEI_association_notification	The SCS/AS is notified when the association of an ME (IMEI(SV)) that uses a specific subscription (IMSI) is changed
5	Roaming_status_notification	The SCS/AS is notified when the UE's roaming status changes
6	Communication_failure_notification	The SCS/AS is notified of communication failure events
7	Availability_after_DDN_failure_notification	The SCS/AS is notified when the UE has become available after a DDN failure
8	Number_of_UEs_in_an_area_notification	The SCS/AS is notified the number of UEs present in a given geographic area The feature supports pre-5G (e.g. 4G) requirement.
9	Notification_websocket	The delivery of notifications over Websocket is supported according to clause 5.2.5.4. This feature requires that the Notification_test_event feature is also supported.
10	Notification_test_event	The testing of notification connection is supported according to clause 5.2.5.3.
11	Subscription_modification	Modifications of an individual subscription resource.
12	Number_of_UEs_in_an_area_notification_5G	The AF is notified the number of UEs present in a given geographic area. The feature supports the 5G requirement. This feature may only be supported in 5G.
13	Pdn_connectivity_status	The SCS/AS requests to be notified when the 3GPP network detects that the UE's PDN connection is set up or torn down.
14	Downlink_data_delivery_status_5G	The AF requests to be notified when the 3GPP network detects that the downlink data delivery status is changed. The feature is not applicable to pre-5G.
15	Availability_after_DDN_failure_notification_enhancement	The AF is notified when the UE has become available after a DDN failure and the traffic matches the packet filter provided by the AF. The feature is not applicable to pre-5G.
16	Enhanced_param_config	This feature supports the co-existence of multiple event configurations for target UE(s) if there are parameters affecting periodic RAU/TAU timer and/or Active Time. Supporting this feature also requires the support of feature number 1 or 2.
17	API_support_capability_notification	The SCS/AS is notified of the availability of support of service APIs. This feature is only applicable in interworking SCEF+NEF scenario.
18	eLCS	This feature supports the enhanced location exposure service (e.g. location information preciser than cell level). The feature is not applicable to pre-5G (e.g. 4G).
19	NSAC	This feature controls the support of the Network Slice Admission Control (NSAC) functionalities. The feature is not applicable to pre-5G (e.g. 4G).
20	Partial_group_modification	This feature supports the partial cancellation and/or partial addition to the group member(s) within the grouped event monitoring subscription.



21	UAV	<p>The SCS/AS requests to be notified of the UAV presence status in a specific geographic area. This feature is only applicable in interworking SCEF+NEF scenario, or standalone 5G scenario.</p> <p>This feature requires that Number_of_UEs_in_an_area_notification and Number_of_UEs_in_an_area_notification_5G features are also supported.</p>
22	MULTIQOS	<p>This feature indicates the support for "Multiple QoS Class" which enables to support more than one Location QoS during LCS procedures.</p> <p>This feature requires that the eLCS feature is also supported.</p>
23	Session_Management_Enhancement	<p>This feature supports Session Management enhancement with requested DNN and/or S-NSSAI. This feature requires that the Pdn_connectivity_status feature or Downlink_data_delivery_status_5G feature is also supported.</p>
24	enNB	<p>Indicates the support of enhancements to the northbound interfaces.</p>
25	EDGEAPP	<p>This feature controls the support of EDGE applications related functionalities (e.g. support the civic address as a possible location granularity). The feature is not applicable to pre-5G (e.g. 4G).</p>
26	UEId_retrieval	<p>This feature supports AF specific UE ID retrieval which is not applicable to pre-5G (e.g. 4G).</p>
27	UserConsentRevocation	<p>This feature indicates the support of user consent revocation management and enforcement (e.g. stop data processing) for EDGE applications.</p>
28	Subscription_Patch	<p>This feature indicates the support of the PATCH method for partial modification of an existing event monitoring subscription.</p>
29	GMEC	<p>This feature indicates the support of Generic Group Management, Exposure and Communication Enhancements.</p> <p>The following functionalities are supported:</p> <ul style="list-style-type: none"> <li>- Support Group Members List Change event reporting.</li> </ul> <p>This feature is not applicable to pre-5G (e.g., 4G).</p>
30	Loss_of_connectivity_notification_5G	<p>The AF is notified when the 3GPP network detects that the UE is no longer reachable for signalling or user plane communication.</p> <p>This feature is not applicable to pre-5G (e.g. 4G).</p>
31	enNB1	<p>Indicates the support of enhancements to this northbound API in Rel-18.</p>
32	AppDetection_5G	<p>This feature indicates the support of Application traffic detection (e.g., start and stop) monitoring event.</p> <p>This feature is not applicable to pre-5G (e.g., 4G).</p>
33	enNB1_5G	<p>Indicates the support of enhancements to this northbound API for 5G in Rel-18.</p> <p>This feature is not applicable to pre-5G (e.g. 4G).</p>
34	eLCS_en	<p>This feature indicates the support of the enhancements to the eLCS feature.</p> <p>The following functionalities are supported:</p> <ul style="list-style-type: none"> <li>- Support the error handling related to the area event reporting for the case where the requested location area is not allowed.</li> <li>- Support location reporting over user plane between UE and AF.</li> </ul> <p>This feature is not applicable to pre-5G (e.g. 4G).</p>

35	eNSAC	<p>This feature indicates the support of the enhancements to the NSAC feature.</p> <p>The following functionalities are supported:</p> <ul style="list-style-type: none"> <li>- Support the status notification of the current number of UEs with at least one PDU session/PDN connection. This feature is not applicable to pre-5G (e.g. 4G).</li> </ul>
36	Ranging_SL	<p>This feature indicates the support of the ranging and sidelink positioning functionality.</p> <p>The following functionalities are supported:</p> <ul style="list-style-type: none"> <li>- Support the ranging and sidelink input/output parameters.</li> </ul> <p>This feature requires the support of eLCS feature.</p> <p>This feature is not applicable to pre-5G (e.g. 4G).</p>
37	DataTransfer	<p>This feature indicates the support of Session inactivity time, Traffic volume and UL/DL data rate events for data transfer and measurement.</p> <p>This feature is not applicable to pre-5G (e.g. 4G).</p>
<p>Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".</p> <p>Description: A clear textual description of the feature.</p>		

## 5.3.5 Error handling

### 5.3.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

### 5.3.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MonitoringEvent API.

### 5.3.5.3 Application Errors

The application errors defined for the MonitoringEvent API are listed in table 5.3.5.3-1.

**Table 5.3.5.3-1: Application errors**

Application Error	HTTP status code	Description	Applicability
EVENT_FEATURE_MISMATCH	400 Bad Request	Indicates the resource creation is not allowed since the supported feature corresponding to the monitoring event is not supported by the client.	
DUPLICATE_REQUEST	400 Bad Request	Indicates that a duplicate subscription already exists for this client.	enNB
PARAMETER_OUT_OF_RANGE	403 Forbidden	Indicates that the resource is not allowed to be created since one or more of the received parameter are out of range defined by operator policies.	
IDLE_STATUS_UNSUPPORTED	403 Forbidden	Indicates that the resource is not allowed to be created since the Idle Status Indication is received in the request but not supported by the network.	
OPERATION_PROHIBITED	403 Forbidden	Indicates the HTTP method is not supported.	
CONSENT_REVOCATION_NOT_SUPPORTED	403 Forbidden	Indicates that the request is rejected because user consent management and enforcement is not supported by the client.	UserConsentRevocation
USER_CONSENT_NOT_GRANTED	403 Forbidden	Indicates that the request is rejected because user consent is not granted.	UserConsentRevocation
RESOURCES_EXCEEDED	403 Forbidden	Indicates that no more subscriptions are allowed for this client.	enNB
REQUEST_NOT_AUTHORIZED	403 Forbidden	Indicates that the AF specific UE ID retrieval request is not authorized or the AF request to subscribe to application detection is not authorized.	UEId_retrieval, AppDetection_5G
REQUESTED_AREA_NOT_ALLOWED	403 Forbidden	Indicates that the location request is rejected because the location area requested by the AF for an area event reporting is not allowed.	eLCS_en
UE_ID_NOT_AVAILABLE	404 Not Found	Indicates that the AF specific UE ID is not available.	UEId_retrieval
UE_NOT_FOUND	404 Not Found	Indicates that the requested UE address is not found.	UEId_retrieval

EVENT_UNSUPPORTED	500 Internal Server Error	Indicates the required monitoring event is not supported by the server.	
-------------------	---------------------------	---	--

## 5.4 ResourceManagementOfBdt API

### 5.4.1 Overview

The ResourceManagementOfBdt API is a RESTful API that allows the SCS/AS to request background data transfer related conditions for a set of UEs. The ResourceManagementOfBdt API defines a set of data models, resources and the related procedures for the creation and management of the background data transfer request. The corresponding JSON schema for the representation of the resources and operations defined by the ResourceManagementOfBdt API is provided in its complete form in Annex A.4.

### 5.4.2 Data model

#### 5.4.2.1 Resource data types

##### 5.4.2.1.1 Introduction

This clause defines data structures to be used in resource representations.

Table 5.4.2.1.1-1 specifies data types re-used by the ResourceManagementOfBdt API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the ResourceManagementOfBdt API.

**Table 5.4.2.1.1-1: ResourceManagementOfBdt API re-used Data Types**

Data type	Reference	Comments
GeographicArea	3GPP TS 29.572 [42]	Identifies the geographical information of the user(s).
CivicAddress	3GPP TS 29.572 [42]	Identifies the civic address information of the user(s).
NetworkAreaInfo	3GPP TS 29.554 [50]	Identifies a network area information.
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.4.4-1.

Table 5.4.2.1.1-2 specifies the data types defined for the ResourceManagementOfBdt API.

**Table 5.4.2.1.1-2: ResourceManagementOfBdt API specific Data Types**

Data type	Clause defined	Description	Applicability
Bdt	5.4.2.1.2	Represents a Background Data Transfer subscription.	
BdtPatch	5.4.2.1.3	Represents a Background Data Transfer subscription modification request.	
ExNotification	5.4.2.1.4	Represents a Background Data Transfer notification.	
TrafficDescriptor	5.4.2.3.2	Identify a traffic descriptor as defined in Figure 5.2.2 of 3GPP TS 24.526 [64].	
TransferPolicy	5.4.2.2.2	Represents an offered transfer policy sent from the SCEF to the SCS/AS, or a selected transfer policy sent from the SCS/AS to the SCEF.	

##### 5.4.2.1.2 Type: Bdt

This type represents a BDT subscription. The same structure is used in the subscription request and subscription response.

Table 5.4.2.1.2-1: Definition of type Bdt

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
self	Link	0..1	Link to the resource "Individual BDT Subscription". This parameter shall be supplied by the SCEF in HTTP responses.	
supportedFeatures	SupportedFeatures	0..1	Used to negotiate the supported optional features of the API as described in clause 5.2.7. This attribute shall be provided in the POST request and in the response of successful resource creation.	
aspld	string	0..1	Identifies an application service provider.	Aspld_5G
volumePerUE	UsageThreshold	1	Identifies the data volume expected to be transferred per UE.	
numberOfUEs	integer	1	Identifies the number of UEs.	
desiredTimeWindow	TimeWindow	1	Identifies the time interval.	
locationArea	LocationArea	0..1	Identifies the area within which the SCS/AS requests the number of UE.	Bdt
locationArea5G	LocationArea5G	0..1	Identifies the area within which the AF requests the number of UE.	LocBdt_5G
referenceld	BdtReferenceld	0..1	Identifies a selected policy of background data transfer.	
transferPolicies	array(TransferPolicy)	0..N	Identifies an offered transfer policy.	
selectedPolicy	integer	0..1	Identity of the selected background data transfer policy. Shall not be present in initial message exchange, can be provided by NF service consumer in a subsequent message exchange.	
externalGroupld	ExternalGroupld	0..1	Identifies a group of users. (NOTE 2)	Group_Id
notificationDestination	Link	0..1	Contains the URI to receive the BDT notification from the NEF.	BdtNotification_5G
warnNotifEnabled	boolean	0..1	Indicates whether the BDT warning notification is enabled or not. If it is set to true, the BDT warning notification is enabled; if it is set to false or absent, the BDT warning notification is disabled.	BdtNotification_5G
trafficDes	TrafficDescriptor	0..1	Contains the traffic descriptor of the background data. (NOTE 2)	
NOTE 1: Properties marked with a feature as defined in clause 5.4.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				
NOTE 2: The attribute is only applicable to the NEF.				

### 5.4.2.1.3 Type: BdtPatch

This type represents a BDT request for the service provided by the SCS/AS to the SCEF via T8 interface. The structure is used for PATCH request.

**Table 5.4.2.1.3-1: Definition of type BdtPatch**

Attribute name	Data type	Cardinality	Description	Applicability
selectedPolicy	integer	1	Identity of the selected background data transfer policy.	
warnNotifEnabled	boolean	0..1	Indicates whether the BDT warning notification is enabled.  - true: the BDT warning notification is enabled; - false: the BDT warning notification is not enabled.	BdtNotification_5G
notificationDestination	Link	0..1	Contains the URI to receive the BDT notifications from the NEF.	enNB

#### 5.4.2.1.4 Type: ExNotification

This type represents a BDT notification provided by the NEF to the AF. The structure is used for POST request.

**Table 5.4.2.1.4-1: Definition of type ExNotification**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
bdtRefId	BdtReferenceId	1	This IE indicates transfer policies of background data transfer which the notification corresponds to.	
locationArea5G	LocationArea5G	0..1	This IE represents a network area where a network performance will go below the criteria set by the operator.	
timeWindow	TimeWindow	0..1	This IE indicates a time window when a network performance will go below the criteria set by the operator.	
candPolicies	array(TransferPolicy)	0..N	This IE indicates a list of the candidate transfer policies from which the AF may select a new transfer policy due to network performance degradation.	
NOTE: Properties marked with a feature as defined in clause 5.4.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				

#### 5.4.2.2 Referenced structured data types

##### 5.4.2.2.1 Introduction

This clause defines structured data types that are referenced from data structures defined in the previous clauses.

##### 5.4.2.2.2 Type: TransferPolicy

This data type represents an offered transfer policy sent from the SCEF to the SCS/AS, or a selected transfer policy sent from the SCS/AS to the SCEF.

**Table 5.4.2.2-1: Definition of type TransferPolicy**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
bdtPolicyId	integer	1	Identifier for the transfer policy	
maxUplinkBandwidth	Bandwidth	0..1	Indicates the maximum aggregated bitrate in the uplink authorized by the PCRF.	
maxDownlinkBandwidth	Bandwidth	0..1	Indicates the maximum aggregated bitrate in the downlink authorized by the PCRF.	
ratingGroup	integer	1	Indicates the rating group during the time window.	
timeWindow	TimeWindow	1	Indicates the recommended time window of the transfer policy	
NOTE: Properties marked with a feature as defined in clause 5.4.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

### 5.4.2.3 Referenced simple data types and enumerations

#### 5.4.2.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses. In addition, data types and enumerations defined in clause 5.2.1 can be referenced.

#### 5.4.2.3.2 Simple data types

The simple data types defined in table 5.4.2.3.2-1 shall be supported.

**Table 5.4.2.3.2-1: Simple data types**

Type name	Description
TrafficDescriptor	String identifying a traffic descriptor as defined in table 5.2.1 of 3GPP TS 24.526 [64].

### 5.4.3 Resource structure

#### 5.4.3.1 General

All resource URIs of this API should have the following root:

**{apiRoot}/3gpp-bdt/v1**

"apiRoot" is set as described in clause 5.2.4. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:



Table 5.4.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Meaning
BDT Subscription	/{scsAsId}/subscriptions	GET	Read all active background data transfer subscription resources for a given SCS/AS
		POST	Create a new background data transfer subscription resource
Individual BDT Subscription	/{scsAsId}/subscriptions/{subscriptionId}	PATCH	Modify a background data transfer subscription resource to select one of the transfer policies offered by the SCEF
		PUT	Update a background data transfer subscription resource for negotiation of background data transfer policy
		GET	Read a background data transfer subscription resource
		DELETE	Delete a background data transfer resources

### 5.4.3.2 Resource: BDT Subscriptions

#### 5.4.3.2.1 Introduction

This resource allows the SCS/AS to read all active long-term transactions related to BDT resource management.

#### 5.4.3.2.2 Resource definition

Resource URI: **{apiRoot}/3gpp-bdt/v1/{scsAsId}/subscriptions**

This resource shall support the resource URI variables defined in table 5.4.3.2.2-1.

Table 5.4.3.2.2-1: Resource URI variables for resource "BDT Subscriptions"

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.

#### 5.4.3.2.3 Resource methods

##### 5.4.3.2.3.1 GET

The GET method allows to read all active resources for a given SCS/AS. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.4.3.2.3.1-1 and table 5.4.3.2.3.1-2.

Table 5.4.3.2.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.4.3.2.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	array(Bdt)	0..N	200 OK	The resource information for the SCS/AS in the request URI are returned.
	none		307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.4.3.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.4.3.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.4.3.2.3.2 PUT

This HTTP method is not supported for the resource.

#### 5.4.3.2.3.3 PATCH

This HTTP method is not supported for the resource.

#### 5.4.3.2.3.4 POST

The POST method creates a new background data transfer subscription resource for a given SCS/AS. The SCS/AS shall initiate the HTTP POST request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.4.3.2.3.4-1 and table 5.4.3.2.3.4-2.

**Table 5.4.3.2.3.4-1: URI query parameters supported by the POST method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.4.3.2.3.4-2: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	Bdt	1	Parameters to register a subscription to request background data transfer related information with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	Bdt	1	201 Created	The resource was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.4.3.2.3.4-3: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-bdt/v1/{scsAsId}/subscriptions/{subscriptionId}

#### 5.4.3.2.3.5 DELETE

This HTTP method is not supported for the resource.

### 5.4.3.3 Resource: Individual BDT Subscription

#### 5.4.3.3.1 Introduction

This resource allows the SCS/AS to manage resources for BDT using a long-term transaction.

#### 5.4.3.3.2 Resource definition

Resource URI: {apiRoot}/3gpp-bdt/v1/{scsAsId}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.4.3.3.2-1.

**Table 5.4.3.3.2-1: Resource URI variables for resource "Individual BDT Subscription"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
subscriptionId	string	Identifier of the subscription resource. The subscriptionId corresponds to the stage 2 TLTRI.

#### 5.4.3.3.3 Resource methods

##### 5.4.3.3.3.1 GET

The GET method allows to read an individual BDT subscription resource to obtain details of an active resource BDT subscription. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.4.3.3.3.1-1 and table 5.4.3.3.3.1-2.

**Table 5.4.3.3.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.4.3.3.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
none				
Response body	Data type	Cardinality	Response codes	Remarks
	Bdt	1	200 OK	The resource information related to the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.4.3.3.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.4.3.3.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.4.3.3.3.2 PUT

The PUT method allows the SCS/AS to modify an existing subscription resource completely. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.4.3.3.3.2-1.

**Table 5.4.3.3.2-1: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	Bdt	1	The SCS/AS requests to update the BDT policy subscription.	
Response body	Data type	Cardinality	Response codes	Remarks
	Bdt	1	200 OK	The subscription was modified successfully. The SCEF shall return an updated subscription in the response content.
	none		204 No Content	The subscription was updated successfully.
	none		307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.4.3.3.2-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.4.3.3.2-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.4.3.3.3.3 PATCH

The PATCH method allows the SCS/AS to modify an existing subscription resource, in order to notify the SCEF about the selected transfer policy. The SCS/AS shall initiate the HTTP PATCH message and the SCEF shall respond to the message.

This method shall support request and response data structures, and response codes, as specified in the table 5.4.3.3.3-1.

**Table 5.4.3.3.3-1: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	BdtPatch		1	Background data transfer policy selected by the SCS/AS.
Response body	Data type	Cardinality	Response codes	Remarks
	Bdt	1	200 OK	The resource was modified successfully. The SCEF shall return an updated subscription in the response content.
	none		204 No Content	The resource was modified successfully.
	none		307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.4.3.3.3-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.4.3.3.3-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.4.3.3.3.4 POST

This HTTP method is not supported for the resource.

5.4.3.3.3.5 DELETE

The DELETE method deletes the resource and terminates the BDT subscription. The SCS/AS shall initiate the HTTP DELETE message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.4.3.3.3.5-1 and table 5.4.3.3.3.5-2.

**Table 5.4.3.3.3.5-1: URI query parameters supported by the DELETE method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.4.3.3.3.5-2: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The resource was terminated successfully.
	none		307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.4.3.3.3.5-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.4.3.3.3.5-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.4.3.4 Void

### 5.4.3A Notifications

#### 5.4.3A.1 General

The notifications provided by the ResourceManagementOfBdt API are specified in this clause.

**Table 5.4.3A-1: Notifications overview**

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
BDT Warning Notification	{notificationDestination}	POST	Notify the BDT warning from the NEF to the AF identified by the notification destination URI (NOTE)

NOTE: This notification may only be supported in 5G.

## 5.4.3A.2 BDT Warning Notification

### 5.4.3A.2.1 Description

The BDT warning notification allows the NEF to notify the AF of the BDT warning notification. The notification may only be supported in 5G.

### 5.4.3A.2.2 Target URI

The Callback URI "{notificationDestination}" shall be used with the callback URI variables defined in table 5.4.3A.2.2-1.

**Table 5.4.3A.2.2-1: Callback URI variables**

Name	Data type	Definition
notificationDestination	Link	Reference provided by the AF when the AF requests to send a BDT warning notification when the network performance in the area of interest goes below the criteria set by the operator. This URI shall be provided within the "notificationDestination" attribute in the Bdt data type.

### 5.4.3A.2.3 Standard Methods

#### 5.4.3A.2.3.1 Notification via POST

The POST method allows to notify AS identified by the notification destination URI of the BDT warning by the NEF and the AF shall respond to the message.

This method shall support the request data structures specified in table 5.4.3A.2.3.1-1 and the response data structures and response codes specified in table 5.4.3A.2.3.1-2.

**Table 5.4.3A.2.3.1-1: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
ExNotification	1	Representation of the BDT warning notification.

**Table 5.4.3A.2.3.1-2: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
none		204 No Content	This case represents a successful notification of BDT warning notification.
none		307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.



**Table 5.4.3A.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.4.3A.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

#### 5.4.3A.2.3.2 Notification via Websocket

If supported by both AF and NEF and successfully negotiated, the ExNotification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4.

### 5.4.4 Used Features

The table below defines the features applicable to the ResourceManagementOfBdt API. Those features are negotiated as described in clause 5.2.7.

**Table 5.4.4-1: Features used by ResourceManagementOfBdt API**

Feature Number	Feature	Description
1	Bdt	The feature supports the pre-5G (e.g. 4G) requirement.
2	LocBdt_5G	The feature supports the 5G requirement. This feature may only be supported in 5G.
3	Group_Id	The feature supports forwarding an external group identifier of the user. This feature shall not be supported in pre-5G.
4	BdtNotification_5G	The feature supports the sending of BDT notification. This feature includes sending of the BDT warning notification to the AF. This feature may only be supported in 5G.
5	enNB	The feature supports enhancement of northbound interfaces, e.g. enable the SCS/AS to update notification destination during modification procedure.
6	Aspld_5G	Indicates the support of application service provider. This feature is not applicable to pre-5G (e.g. 4G).
Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".		
Description: A clear textual description of the feature.		

### 5.4.5 Error handling

#### 5.4.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

#### 5.4.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the ResourceManagementOfBdt API.

#### 5.4.5.3 Application Errors

The application errors defined for ResourceManagementOfBdt API are listed in table 5.4.5.3-1.

**Table 5.4.5.3-1: Application errors**

Application Error	HTTP status code	Description	Applicability

## 5.5 ChargeableParty API

### 5.5.1 Overview

The ChargeableParty API is a RESTful API that allows the SCS/AS to either request to sponsor the traffic from the beginning or to request becoming the chargeable party at a later point in time via the T8 interface. The ChargeableParty API defines a set of data models, resources and the related procedures for the creation and management of the AS sessions with chargeable party change. The corresponding JSON schema for the representation of the resources and operations defined by the Chargeable API is provided in its complete form in Annex A.5.

### 5.5.2 Data model

#### 5.5.2.1 Resource data types

##### 5.5.2.1.1 Introduction

This clause defines data structures to be used in resource representations.

Table 5.5.2.1.1-1 specifies data types re-used by the ChargeableParty API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the ChargeableParty API.

**Table 5.5.2.1.1-1: ChargeableParty API re-used Data Types**

Data type	Reference	Comments
Dnn	3GPP TS 29.571 [45]	Identifies a DNN.
EthFlowDescription	3GPP TS 29.514 [52]	Defines a packet filter for an Ethernet flow.(NOTE)
IpAddr	3GPP TS 29.571 [45]	UE IP Address.
MacAddr48	3GPP TS 29.571 [45]	MAC Address.
ServAuthInfo	3GPP TS 29.514 [52]	The authorization result of a request bound to a transfer policy.
Snssai	3GPP TS 29.571 [45]	Identifies the S-NSSAI.
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.5.4-1.
NOTE: In order to support a set of MAC addresses with a specific range in the traffic filter, feature MacAddressRange_5G as specified in clause 5.5.4 shall be supported.		

Table 5.5.2.1.1-2 specifies the data types defined for the ChargeableParty API.

**Table 5.5.2.1.1-2: ChargeableParty API specific Data Types**

Data type	Clause defined	Description	Applicability
ChargeableParty	5.5.2.1.2	Represents the configuration of a chargeable party.	
ChargeablePartyPatch	5.5.2.1.3	Represents a modification request of a chargeable party resource.	

##### 5.5.2.1.2 Type: ChargeableParty

This type represents the configuration of a chargeable party. The same structure is used in the configuration request and configuration response.

**Table 5.5.2.1.2-1: Definition of type ChargeableParty**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
self	Link	0..1	Link to the resource "Individual Chargeable Party Transaction". This parameter shall be supplied by the SCEF in HTTP responses.	
dnn	Dnn	0..1	Identifies a DNN, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only. (NOTE 3)	
snssai	Snssai	0..1	Identifies an S-NSSAI. (NOTE 3)	
supportedFeatures	SupportedFeatures	0..1	Used to negotiate the supported optional features of the API as described in clause 5.2.7. This attribute shall be provided in the POST request and in the response of successful resource creation.	
notificationDestination	Link	1	Contains the URI to receive the notification of bearer level event(s) from the SCEF.	
requestTestNotification	boolean	0..1	Set to true by the SCS/AS to request the SCEF to send a test notification as defined in clause 5.2.5.3. Set to false or omitted otherwise.	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	0..1	Configuration parameters to set up notification delivery over Websocket protocol as defined in clause 5.2.5.4.	Notification_websocket
exterApplId	string	0..1	Identifies the external Application Identifier. (NOTE 2)	ApplId
ipv4Addr	Ipv4Addr	0..1	Identifies the Ipv4 address. (NOTE 2)	
ipDomain	string	0..1	The IPv4 address domain identifier. The attribute may only be provided if the ipv4Addr attribute is present.	
ipv6Addr	Ipv6Addr	0..1	Identifies the Ipv6 address. (NOTE 2)	
macAddr	MacAddr48	0..1	Identifies the MAC address. (NOTE 2)	EthChgParty_5G
flowInfo	array(FlowInfo)	0..N	Describes the IP flows. (NOTE 2) (NOTE 4)	
ethFlowInfo	array(EthFlowDescription)	0..N	Identifies Ethernet packet flows. (NOTE 2)	EthChgParty_5G
sponsorInformation	SponsorInformation	1	Describes the sponsor information such as who is sponsoring the traffic.	
sponsoringEnabled	boolean	1	Indicates whether the sponsoring data connectivity is enabled.  - true: the sponsoring data connectivity is enabled; - false: the sponsoring data connectivity is not enabled.	
referenceId	BdtReferenceId	0..1	The reference ID for a previously selected policy of background data transfer.	
servAuthInfo	ServAuthInfo	0..1	Indicates the authorization result for the request bound to the transfer policy indicated by the "referenceId" attribute. Supplied by the SCEF	
usageThreshold	UsageThreshold	0..1	Time period and/or traffic volume.	
events	array(Event)	0..N	Corresponds to the event(s) to which the SCS/AS requests to subscribe.	enNB

NOTE 1:	Properties marked with a feature as defined in clause 5.5.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.
NOTE 2:	One of the "ipv4Addr", "ipv6Addr", or "macAddr" attribute shall be provided. If ipv4 or ipv6 address is provided, IP flow information shall be provided. If MAC address is provided and the Appld feature is not supported, Ethernet flow information shall be provided. If the Appld feature is supported, one of IP flow information, Ethernet flow information (if EthChgParty_5G is supported) or External Application Identifier shall be provided.
NOTE 3:	The property is only applicable for the NEF.
NOTE 4:	The "tosTC" attribute of the "flowInfo" attribute may only be present if the "ToSTC_5G" feature is supported.

### 5.5.2.1.3 Type: ChargeablePartyPatch

This type represents the configuration of a chargeable party. The structure is used for PATCH request.

**Table 5.5.2.1.3-1: Definition of type ChargeablePartyPatch**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
flowInfo	array(FlowInfo)	0..N	Describes the IP flows. (NOTE 2)(NOTE 3)	
exterAppld	string	0..1	Identifies the AF Application Identifier. (NOTE 2)	Appld
ethFlowInfo	array(EthFlowDescription)	0..N	Describes Ethernet packet flows. (NOTE 2)	EthChgParty_5G
sponsoringEnabled	boolean	0..1	Indicates whether the sponsoring data connectivity is enabled.  - true: the sponsoring data connectivity is enabled; - false: the sponsoring data connectivity is not enabled.	
referenceId	BdtReferenceId	0..1	The reference ID for a previously selected policy of background data transfer.	
usageThreshold	UsageThresholdRm	0..1	Time period and/or traffic volume.	
notificationDestination	Link	0..1	Contains the URL to receive the notification event(s) from the SCEF.	
events	array(Event)	0..N	Corresponds to the event(s) to which the SCS/AS requests to subscribe.	enNB
NOTE 1:	Properties marked with a feature as defined in clause 5.5.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.			
NOTE 2:	One of "flowInfo", "exterAppld" or "ethFlowInfo" may be provided.			
NOTE 3:	The "tosTC" attribute of the "flowInfo" attribute may only be present if the "ToSTC_5G" feature is supported.			

## 5.5.3 Resource structure

### 5.5.3.1 General

All resource URIs of this API should have the following root:

**{apiRoot}/3gpp-chargeable-party/v1**

"apiRoot" is set as described in clause 5.2.4. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:

Table 5.5.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Meaning
Chargeable Party Transactions	/{scsAsId}/transactions	GET	Read all or queried chargeable party transaction resources for a given SCS/AS
		POST	Create a new chargeable party transaction resource
Individual Chargeable Party Transaction	/{scsAsId}/transactions/{transactionId}	GET	Read a chargeable party transaction resource
		PATCH	Partial update a chargeable party transaction resource.
		DELETE	Delete an existing chargeable party transaction resource

## 5.5.3.2 Resource: Chargeable Party Transactions

### 5.5.3.2.1 Introduction

This resource allows the SCS/AS to read all active long-term transactions related to setting a chargeable party and create individual long-term transactions.

### 5.5.3.2.2 Resource definition

Resource URI: **{apiRoot}/3gpp-chargeable-party/v1/{scsAsId}/transactions**

This resource shall support the resource URI variables defined in table 5.5.3.2.2-1.

Table 5.5.3.2.2-1: Resource URI variables for resource "Chargeable Party Transactions"

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.

### 5.5.3.2.3 Resource methods

#### 5.5.3.2.3.1 GET

The GET method allows to read all or queried active chargeable party transactions for a given SCS/AS. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.5.3.2.3.1-1 and table 5.5.3.2.3.1-2.

**Table 5.5.3.2.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks	Applicability
ip-addr	array(IpAddr)	0..N	Contains the IP address(es) of the requested UE(s). (NOTE 1, NOTE 2)	enNB
ip-domain	string	0..1	Contains the IPv4 address domain identifier. This query parameter may be present only if the "ip-addr" query parameter is also present and contains at least one array element including an IPv4 address.	enNB
mac-addr	array(MacAddr48)	0..N	Contains the MAC address(es) of the requested UE(s). (NOTE 1, NOTE 2)	enNB
NOTE 1: Either the "ip-addr" query parameter or the "mac-addr" query parameter may be provided at the same time.				
NOTE 2: If multiple array elements are provided within this query parameter, then each array element shall be treated as a separate query parameter.				

**Table 5.5.3.2.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	array(ChargeableParty)	0..N	200 OK	The chargeable party transactions information for the SCS/AS in the request URI are returned.
	none		307 Temporary Redirect	Temporary redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.5.3.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.5.3.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.5.3.2.3.2 PUT

This HTTP method is not supported for the resource.

## 5.5.3.2.3.3 PATCH

This HTTP method is not supported for the resource.

## 5.5.3.2.3.4 POST

The POST method creates a new chargeable party transaction resource for a given SCS/AS. The SCS/AS shall initiate the HTTP POST request message and the SCEF shall respond to the message. The SCEF shall construct the URI of the created resource.

This method shall support request and response data structures, and response codes, as specified in the table 5.5.3.2.3.4-1.

**Table 5.5.3.2.3.4-1: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	ChargeableParty	1	Parameters to create a chargeable party transaction with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	ChargeableParty	1	201 Created	The transaction was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.5.3.2.3.4-2: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-chargeable-party/v1/{scsAsId}/transactions/{transactionId}

## 5.5.3.2.3.5 DELETE

This HTTP method is not supported for the resource.

## 5.5.3.3 Resource: Individual Chargeable Party Transaction

## 5.5.3.3.1 Introduction

This resource allows the SCS/AS to configure a chargeable party for some application flows using a long-term transaction.

## 5.5.3.3.2 Resource definition

Resource URI: {apiRoot}/3gpp-chargeable-party/v1/{scsAsId}/transactions/{transactionId}

This resource shall support the resource URI variables defined in table 5.5.3.3.2-1.

**Table 5.5.3.3.2-1: Resource URI variables for resource "Individual Chargeable Party Transaction"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
transactionId	string	Identifier of the transaction. The transactionId corresponds to the stage 2 TLTRI.



## 5.5.3.3.3 Resource methods

## 5.5.3.3.3.1 GET

The GET method allows to read a transaction resource to obtain details of an active. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.5.3.3.3.1-1 and table 5.5.3.3.3.1-2.

**Table 5.5.3.3.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.5.3.3.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	ChargeableParty	1	200 OK	The chargeable party transactions information related to the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.5.3.3.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.5.3.3.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.5.3.3.3.2 PUT

This HTTP method is not supported for the resource.

## 5.5.3.3.3.3 PATCH

The PATCH method allows to change the sponsoring status of an active chargeable party transaction. It also allows to activate a background data transfer policy. The SCS/AS shall initiate the HTTP PATCH request message and the SCEF shall respond to the message. This method shall support request and response data structures, and response codes, as specified in the table 5.5.3.3.3.3-1.

**Table 5.5.3.3.3-1: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	ChargeablePartyPatch	1	Sponsor status change, usage threshold change and/or background data transfer policy activation.	
Response body	Data type	Cardinality	Response codes	Remarks
	ChargeableParty	1	200 OK	The chargeable party transaction resource was modified successfully. The SCEF shall return a representation of the updated chargeable party transaction resource in the response content.
	none		204 No Content	The chargeable party transaction resource was modified successfully.
	none		307 Temporary Redirect	Temporary redirection, during transaction modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 also apply.				

**Table 5.5.3.3.3-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.5.3.3.3-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.5.3.3.3.4 POST

This HTTP method is not supported for the resource.

#### 5.5.3.3.3.5 DELETE

The DELETE method allows to delete an active chargeable party transaction resource and to terminate the related chargeable party transaction. The SCS/AS shall initiate the HTTP DELETE request message and the SCEF shall respond to the message.

This method shall support request and response data structures, and response codes, as specified in the table 5.5.3.3.3-1.

**Table 5.5.3.3.5-1.: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The subscription was deleted successfully.
	NotificationData	1	200 OK	The subscription was deleted successfully. The notification data shall be included in the response.
	none		307 Temporary Redirect	Temporary redirection, during transaction termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				

**Table 5.5.3.3.5-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.5.3.3.5-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.5.3.4 Void

### 5.5.3A Notifications

#### 5.5.3A.1 General

The notifications provided by the ChargeableParty API are specified in this clause.

**Table 5.5.3A-1: Notifications overview**

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Event Notification	{notificationDestination}	POST	Notify the bearer level event(s) from the SCEF to the SCS/AS identified by the notification destination URI

## 5.5.3A.2 Event Notification

### 5.5.3A.2.1 Description

The Event Notification allows the SCEF to notify the SCS/AS of the bearer level event(s).

### 5.5.3A.2.2 Target URI

The Callback URI "{notificationDestination}" shall be used with the callback URI variables defined in table 5.5.3A.2.2-1.

**Table 5.5.3A.2.2-1: Callback URI variables**

Name	Data type	Definition
notificationDestination	Link	Reference provided by the SCS/AS when the SCS/AS requests to sponsor the traffic from the beginning or to become the chargeable party at a later point. This URI shall be provided within the "notificationDestination" attribute in the ChargeableParty type.

### 5.5.3A.2.3 Standard Methods

#### 5.5.3A.2.3.1 Notification via POST

The POST method allows to notify SCS/AS identified by the notification destination URI of the bearer level event(s) by the SCEF and the SCS/AS shall respond to the message.

This method shall support the request data structures specified in table 5.5.3A.2.3.1-1 and the response data structures and response codes specified in table 5.5.3A.2.3.1-2.

**Table 5.5.3A.2.3.1-1: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
NotificationData	1	Representation of the bearer level notification.

**Table 5.5.3A.2.3.1-2: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
none		204 No Content	This case represents a successful notification of bearer level event(s).
none		307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.5.3A.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.5.3A.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

### 5.5.3A.2.3.2 Notification via Websocket

If supported by both SCS/AS and SCEF and successfully negotiated, the NotificationData may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4.

## 5.5.4 Used Features

The table below defines the features applicable to the ChargeableParty API. Those features are negotiated as described in clause 5.2.7.

**Table 5.5.4-1: Features used by ChargeableParty API**

Feature Number	Feature	Description
1	Notification_websocket	The delivery of notifications over Websocket is supported according to clause 5.2.5.4. This feature requires that the Notification_test_event feature is also supported.
2	Notification_test_event	The testing of notification connection is supported according to clause 5.2.5.3.
3	EthChgParty_5G	Chargeable Party for Ethernet UE. This feature may only be supported in 5G.
4	MacAddressRange_5G	Indicates the support of a set of MAC addresses with a specific range in the traffic filter. This feature may only be supported in 5G.
5	ApplId	Indicates the support of dynamically providing the Application Identifier via the API.
6	enNB	Indicates the support of enhancements to the northbound interfaces, e.g. enable an SCS/AS to explicitly indicate the event(s) that it would like to subscribe to.
7	ToSTC_5G	Indicates the support of Type of Service or Traffic Class. This feature may only be supported in 5G.
Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".		
Description: A clear textual description of the feature.		

## 5.5.5 Error handling

### 5.5.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

### 5.5.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the ChargeableParty API.

### 5.5.5.3 Application Errors

The application errors defined for ChargeableParty API are listed in table 5.5.5.3-1.

**Table 5.5.5.3-1: Application errors**

Application Error	HTTP status code	Description	Applicability

## 5.6 NIDD API

### 5.6.1 Overview

The NIDD API is a RESTful API that allows the SCS/AS to send non-IP data to the UE or receive non-IP data from the UE. The NIDD API defines a set of data models, resources and the related procedures for the non-IP data transfer. The corresponding JSON schema for the representation of the resources and operations defined by the NIDD API is provided in its complete form in Annex A.6.

### 5.6.2 Data model

#### 5.6.2.1 Resource data types

##### 5.6.2.1.1 Introduction

This clause defines data structures to be used in resource representations, including subscription resources.

Table 5.6.2.1.1-1 specifies data types re-used by the NIDD API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the NIDD API.

**Table 5.5.2.1.1-1: NIDD API re-used Data Types**

Data type	Reference	Comments
NullValue	3GPP TS 29.571 [45]	JSON's null value, used as an explicit value of an enumeration.
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.6.4-1.

Table 5.6.2.1.1-2 specifies the data types defined for the NIDD API.

Table 5.6.2.1.1-2: NIDD API specific Data Types

Data type	Clause defined	Description	Applicability
DeliveryStatus	5.6.2.3.4	Represents the status of a downlink NIDD data delivery.	
GmdNiddDownlinkDataDeliveryNotification	5.6.2.1.8	Represents the delivery status of a specific group NIDD downlink data delivery.	
GmdResult	5.6.2.2.3	Represents the group message delivery result.	GroupMessage Delivery
ManageEntity	5.6.2.3.7	Represents the origin that manages the RDS port.	
ManagePort	5.6.2.1.9	Represents the configuration of a RDS dynamic port management.	Rds_dynamic_port
ManagePortNotification	5.6.2.1.10	Represents a ManagePort notification of port numbers that are reserved.	
NiddConfiguration	5.6.2.1.2	Represents the configuration for NIDD.	
NiddConfigurationPatch	5.6.2.1.7	Represents the parameters to update a NIDD configuration.	
NiddConfigurationStatusNotification	5.6.2.1.6	Represents an NIDD configuration status notification.	
NiddDownlinkDataDeliveryFailure	5.6.2.2.4	Represents information related to a failure delivery result.	
NiddDownlinkDataDeliveryStatusNotification	5.6.2.1.5	Represents the delivery status of a specific NIDD downlink data delivery.	
NiddDownlinkDataTransfer	5.6.2.1.3	Represents the received NIDD downlink data from the SCS/AS.	
NiddDownlinkDataTransferPatch	5.6.2.1.11	Represents the parameters to request the modification of an Individual NIDD Downlink Data Delivery resource.	PatchUpdate
NiddStatus	5.6.2.3.5	Represents the status of a NIDD configuration.	
NiddUplinkDataNotification	5.6.2.1.4	Represents NIDD uplink data to be notified to the SCS/AS.	
PdnEstablishmentOptions	5.6.2.3.3	Represents PDN establishment options that describe the network behaviour when there is no PDN connection towards the addressed UE.	
PdnEstablishmentOptionsRm	5.6.2.3.6	Represents the same information as the PdnEstablishmentOptions but with the "nullable: true" property.	
RdsDownlinkDataDeliveryFailure	5.6.2.2.5	Represents the failure delivery result for RDS.	
RdsPort	5.6.2.2.2	Represents the port configuration for Reliable Data Transfer.	
SerializationFormat	5.6.2.3.8	Represents a serialization format associated with an RDS port.	Rds_serialization_format

### 5.6.2.1.2 Type: NiddConfiguration

This type represents the configuration for NIDD. The same structure is used in the configuration request and configuration response.

**Table 5.6.2.1.2-1: Definition of type NiddConfiguration**



Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
self	Link	0..1	Link to the resource "Individual NIDD configuration". This parameter shall be supplied by the SCEF in HTTP responses	
supportedFeatures	SupportedFeatures	0..1	Used to negotiate the supported optional features of the API as described in clause 5.2.7. This attribute shall be provided in the POST request and in the response of successful resource creation.	
mtcProviderId	string	0..1	Identifies the MTC Service Provider and/or MTC Application. (NOTE 3)	
externalId	ExternalId	0..1	Each element uniquely identifies a user as defined in clause 4.6.2 of 3GPP TS 23.682 [2].  (NOTE 2)	
msisdn	Msisdn	0..1	Each element identifies the MS internal PSTN/ISDN number allocated for a UE.  (NOTE 2)	
externalGroupId	ExternalGroupId	0..1	Identifies a user group as defined in clause 4.6.3 of 3GPP TS 23.682 [2].  (NOTE 2)	GroupMessageDelivery
duration	DateTime	0..1	Identifies the absolute time at which the related NIDD Configuration request is considered to expire, as specified in clause 5.13.2 of 3GPP TS 23.682 [2]. When omitted in the request, it indicates the configuration is requested to be valid forever by the SCS/AS. When omitted in the response, it indicates the configuration is set to valid forever by the SCEF.	
reliableDataService	boolean	0..1	Indicates whether the reliable data service (as defined in clause 4.5.14.3 of 3GPP TS 23.682 [2]) acknowledgement is requested.  - true: reliable data service acknowledgement is requested; - false (default): reliable data service acknowledgement is not requested.	
rdsPorts	array(RdsPort)	0..N	Indicates the static port configuration that is used for reliable data transfer between specific applications using RDS (as defined in clause 5.2.4 and 5.2.5 of 3GPP TS 24.250 [31]).	
pdnEstablishmentOption	PdnEstablishmentOptions	0..1	Indicate what the SCEF should do if the UE has not established the PDN connection and MT non-IP data needs to be sent. (wait for the UE to establish the PDN connection, respond with an error cause, or send a device trigger; see step 2 of the MT NIDD Procedure in clause 5.13.3 of 3GPP TS 23.682 [2]) The SCEF will use the value as the default preference from the SCS/AS when handling all MT non-IP packets associated with the NIDD connection.	
notificationDestination	Link	1	An URI of a notification destination that T8 message shall be delivered to.	
requestTestNotification	boolean	0..1	Set to true by the SCS/AS to request the SCEF to send a test notification as defined in clause 5.2.5.3. Set to false or omitted otherwise.	Notification_test_event

websocketNotifConfig	WebsocketNotifConfig	0..1	Configuration parameters to set up notification delivery over Websocket protocol as defined in clause 5.2.5.4.	Notification_websocket
maximumPacketSize	integer	0..1	The Maximum Packet Size is the maximum NIDD packet size that was transferred to the UE by the SCEF in the PCO, see clause 4.5.14.1 of 3GPP TS 23.682 [2]. If no maximum packet size was provided to the UE by the SCEF, the SCEF sends a default configured max packet size to SCS/AS.  Unit: bit.	
niddDownlinkDataTransfers	array(NiddDownlinkDataTransfer)	0..N	The downlink data deliveries that needed to be executed by the SCEF. The cardinality of the property shall be 0..1 in the request and 0..N in the response (i.e. response may contain multiple buffered MT NIDD).  For GroupMessageDelivery feature, this property is only applicable for the configuration response to GET request.	
status	NiddStatus	0..1	May be supplied by the SCEF	
<p>NOTE 1: Properties marked with a feature as defined in clause 5.6.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features unless stated otherwise.</p> <p>NOTE 2: One of the properties "externalId", "msisdn" or "externalGroupId" shall be included.</p> <p>NOTE 3: The SCEF should check received MTC provider identifier and then the SCEF may:</p> <ul style="list-style-type: none"> <li>- override it with local configured value and send it to HSS;</li> <li>- send it directly to the HSS; or</li> <li>- reject the NIDD configuration request.</li> </ul>				

### 5.6.2.1.3 Type: NiddDownlinkDataTransfer

This type represents received NIDD downlink data from the SCS/AS.

**Table 5.6.2.1.3-1: Definition of type NiddDownlinkDataTransfer**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
externalId	ExternalId	0..1	Each element uniquely identifies a user as defined in clause 4.6.2 of 3GPP TS 23.682 [2]. (NOTE 2)	
externalGroupId	ExternalGroupId	0..1	Identifies a user group as defined in clause 4.6.3 of 3GPP TS 23.682 [2]. (NOTE 2)	GroupMessageDelivery
msisdn	Msisdn	0..1	Each element identifies the MS internal PSTN/ISDN number allocated for a UE. (NOTE 2)	
self	Link	0..1	Link to the resource "Individual NIDD downlink data delivery". This parameter shall be supplied by the SCEF in HTTP responses.	
data	Bytes	1	The non-IP data that needed to be delivered to UE from the SCS/AS.	
reliableDataService	boolean	0..1	Indicates whether the reliable data service (as defined in clause 4.5.14.3 of 3GPP TS 23.682 [2]) acknowledgement is requested.  - true: reliable data service acknowledgement is requested; - false (default): reliable data service acknowledgement is not requested.	
rdsPort	RdsPort	0..1	Indicates the port configuration that is used for reliable data transfer between specific applications using RDS (as defined in clause 5.2.4 and 5.2.5 of 3GPP TS 24.250 [31]).	
maximumLatency	DurationSec	0..1	It is used to indicate maximum delay acceptable for downlink data and may be used to configure the buffer duration; a Maximum Latency of 0 indicates that buffering is not allowed. If not provided, the SCEF determines the acceptable delay based on local policies.	
priority	integer	0..1	It is used to indicate the priority of the non-IP data packet relative to other non-IP data packets. For GroupMessageDelivery feature, this property is not applicable.	
pdnEstablishmentOption	PdnEstablishmentOptions	0..1	Indicate what the SCEF should do if the UE has not established the PDN connection and MT non-IP data needs to be sent (wait for the UE to establish the PDN connection, respond with an error cause, or send a device trigger; see step 2 of the MT NIDD Procedure in clause 5.13.3 of 3GPP TS 23.682 [2])  If PDN Connection Establishment Option is not provided with the non-IP packet, the SCEF uses the PDN Connection Establishment Option that was provided during NIDD Configuration to decide how to handle the absence of a PDN connection.	
deliveryStatus	DeliveryStatus	0..1	Indicates the MT NIDD delivery status.	

requestedRetransmissionTime	DateTime	0..1	Identifies the absolute time at which the SCEF is expected to retransmit the non-IP data when the deliveryStatus indicates that the non-IP data is buffered in the SCEF. This parameter may be supplied by the SCEF for delivery status "BUFFERING_TEMPORARILY_NOT_REACHABLE"	
NOTE 1: Properties marked with a feature as defined in clause 5.6.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features unless stated otherwise.				
NOTE 2: One of the properties "externalId", "msisdn" or "externalGroupId" shall be included.				

#### 5.6.2.1.4 Type: NiddUplinkDataNotification

This type represents NIDD uplink data to be notified to the SCS/AS.

**Table 5.6.2.1.4-1: Definition of type NiddUplinkDataNotification**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
niddConfiguration	Link	1	Link to the NIDD configuration resource to which this notification is related.	
externalId	ExternalId	0..1	Each element uniquely identifies a user as defined in Clause 4.6.2 of 3GPP TS 23.682 [2]. (NOTE 2)	
msisdn	Msisdn	0..1	Each element identifies the MS internal PSTN/ISDN number allocated for a UE. (NOTE 2)	
data	Bytes	1	The non IP data that needed to be delivered from the UE to the SCS/AS.	
reliableDataService	boolean	0..1	Indicates whether the reliable data service acknowledgement is requested.  - true: reliable data service acknowledgement is requested; - false: reliable data service acknowledgement is not requested.	
rdsPort	RdsPort	0..1	Indicates the port configuration that is used for reliable data transfer between specific applications using RDS (as defined in clause 5.2.4 and 5.2.5 of 3GPP TS 24.250 [31]).	
NOTE 1: Properties marked with a feature as defined in clause 5.6.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				
NOTE 2: One of the properties "externalId" or "msisdn" shall be included.				

#### 5.6.2.1.5 Type: NiddDownlinkDataDeliveryStatusNotification

This type represents the delivery status for a specific NIDD downlink data delivery.

**Table 5.6.2.1.5-1: Definition of type NiddDownlinkDataDeliveryStatusNotification**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
niddDownlinkDataTransfer	Link	1	Link to the NIDD downlink data transfer resource to which this notification is related.	
deliveryStatus	DeliveryStatus	1	Indicates the MT NIDD delivery status.	
requestedRetransmissionTime	DateTime	0..1	Identifies the absolute time at which the UE will be reachable. This parameter may be supplied by the SCEF for delivery status "FAILURE_TEMPORARILY_NOT_REACHABLE"	
NOTE: Properties marked with a feature as defined in clause 5.6.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

#### 5.6.2.1.6 Type: NiddConfigurationStatusNotification

This type represents an NIDD configuration status notification.

**Table 5.6.2.1.6-1: Definition of type NiddConfigurationStatusNotification**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
niddConfiguration	Link	1	Link to the NIDD configuration resource to which this notification is related.	
externalId	ExternalId	0..1	Each element uniquely identifies a user as defined in Clause 4.6.2 of 3GPP TS 23.682 [2]. (NOTE 2)	
msisdn	Msisdn	0..1	Each element identifies the MS internal PSTN/ISDN number allocated for a UE. (NOTE 2)	
status	NiddStatus	1	Indicates the NIDD configuration status.	
rdsCapIndication	boolean	0..1	It indicates whether the network capability for the reliable data service is enabled or not.	
rdsPort	RdsPort	0..1	Indicates the port configuration that is used for reliable data transfer between specific applications using RDS (as defined in clause 5.2.4 and 5.2.5 of 3GPP TS 24.250 [31]).	Rds_port_verification
NOTE 1: Properties marked with a feature as defined in clause 5.6.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				
NOTE 2: One of the properties "externalId" or "msisdn" shall be included.				

#### 5.6.2.1.7 Type: NiddConfigurationPatch

This type represents an NIDD configuration used in PATCH.

**Table 5.6.2.1.7-1: Definition of type NiddConfigurationPatch**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
duration	DateTimeRm	0..1	Identifies the absolute time at which the related NIDD Configuration request is considered to expire, as specified in clause 5.13.2 of 3GPP TS 23.682 [2]. When set to null in the PATCH request, it indicates the configuration is requested to be valid forever by the SCS/AS. When omitted in the response, it indicates the configuration is set to valid forever by the SCEF.	
reliableDataService	boolean	0..1	Indicates whether the reliable data service (as defined in clause 4.5.14.3 of 3GPP TS 23.682 [2]) acknowledgement is requested.  - true: reliable data service acknowledgement is requested; - false: reliable data service acknowledgement is not requested.	
rdsPorts	array(RdsPort)	0..N	Indicates the static port configuration that is used for reliable data transfer between specific applications using RDS (as defined in clause 5.2.4 and 5.2.5 of 3GPP TS 24.250 [31]).	
pdnEstablishmentOption	PdnEstablishmentOptionsRm	0..1	Indicate what the SCEF should do if the UE has not established the PDN connection and MT non-IP data needs to be sent. (wait for the UE to establish the PDN connection, respond with an error cause, or send a device trigger; see step 2 of the MT NIDD Procedure in clause 5.13.3 of 3GPP TS 23.682 [2]) The SCEF will use the value as the default preference from the SCS/AS when handling all MT non-IP packets associated with the NIDD connection.	
notificationDestination	Link	0..1	An URI of a notification destination that the message shall be delivered to.	
NOTE: Properties marked with a feature as defined in clause 5.6.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

**5.6.2.1.8 Type: GmdNiddDownlinkDataDeliveryNotification**

This type represents the delivery status for a specific group NIDD downlink data delivery.

**Table 5.6.2.1.8-1: Definition of type GmdNiddDownlinkDataDeliveryNotification**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
niddDownlinkDataTransfer	Link	1	Link to the NIDD downlink data transfer resource to which this notification is related.	
gmdResults	array(GmdResult)	1..N	Indicates the group message delivery result.	GroupMessageDelivery
NOTE: Properties marked with a feature as defined in clause 5.6.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

**5.6.2.1.9 Type: ManagePort**

This type represents the configuration for RDS dynamic port management which is applicable for Rds\_dynamic\_port feature.

**Table 5.6.2.1.9-1: Definition of type ManagePort**

Attribute name	Data type	Cardinality	Description	Applicability
self	Link	0..1	Link to the resource "Individual ManagePort Configuration". This parameter shall be supplied by the SCEF in HTTP PUT/GET responses and in the notification POST request.	
applicationId	string	1	Indicates the application that is associated with port configuration specified above (as defined in clause 5.4.2.6 of 3GPP TS 24.250 [31]).	
manageEntity	ManageEntity	0..1	Indicates the "Individual ManagePort Configuration" resource is created by which function entity (UE or the AS). This attribute is supplied by the SCEF.	
skipUeInquiry	boolean	0..1	Indicate whether to skip UE inquiry. Set to "true" if the SCS/AS decides to reserve port on the SCEF without confirming with the UE; otherwise set to "false". Default value is "false" if omitted.	
supportedFormats	array(SerializationFormat)	0..N	Indicates the serialization format(s) that are supported by the SCS/AS on the associated RDS port. This attribute is supplied by the SCS/AS.	Rds_serialization_format
configuredFormat	SerializationFormat	0..1	Indicates the serialization format that has been configured/negotiated for the RDS port. This attribute is supplied by the SCEF. (NOTE)	Rds_serialization_format
NOTE: The same serialization format is used in the MO and MT directions.				

#### 5.6.2.1.10 Type: ManagePortNotification

This type represents a ManagePort notification of port numbers that are reserved.

**Table 5.6.2.1.10-1: Definition of type ManagePortNotification**

Attribute name	Data type	Cardinality	Description	Applicability
niddConfiguration	Link	1	Link to the NIDD configuration resource to which this notification is related.	
externalId	ExternalId	0..1	Each element uniquely identifies a user as defined in Clause 4.6.2 of 3GPP TS 23.682 [2]. (NOTE)	
msisdn	Msisdn	0..1	Each element identifies the MS internal PSTN/ISDN number allocated for a UE. (NOTE)	
managedPorts	array(ManagePort)	0..N	Indicates the reserved RDS port configuration information.	
NOTE: One of the properties "externalId" or "msisdn" shall be included.				

#### 5.6.2.1.11 Type: NiddDownlinkDataTransferPatch

This data type represents the parameters to request the modification of an Individual NIDD Downlink Data Delivery resource.



Table 5.6.2.1.11-1: Definition of type NiddDownlinkDataTransferPatch

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
data	Bytes	1	The updated non-IP data that needs to be delivered to the UE from the SCS/AS.	
reliableDataService	boolean	0..1	Indicates whether the reliable data service (as defined in clause 4.5.14.3 of 3GPP TS 23.682 [2]) acknowledgement is requested.  - true: reliable data service acknowledgement is requested; - false: reliable data service acknowledgement is not requested.	
rdsPort	RdsPort	0..1	Indicates the port configuration that is used for reliable data transfer between specific applications using RDS (as defined in clause 5.2.4 and 5.2.5 of 3GPP TS 24.250 [31]).	
maximumLatency	DurationSec	0..1	It is used to indicate the maximum delay acceptable for downlink data delivery. It may be used to configure the buffer duration. A Maximum Latency of 0 indicates that buffering is not allowed. If not provided, the SCEF determines the acceptable delay based on local policies.	
priority	integer	0..1	It is used to indicate the priority of these non-IP data packets relative to other non-IP data packets.	
pdnEstablishmentOption	PdnEstablishmentOptions	0..1	Indicates what the SCEF should do if the UE has not established the PDN connection and MT non-IP data needs to be sent (wait for the UE to establish the PDN connection, respond with an error cause, or send a device trigger; see step 2 of the MT NIDD Procedure in clause 5.13.3 of 3GPP TS 23.682 [2])  If PDN Connection Establishment Option is not provided with the non-IP packets, the SCEF uses the PDN Connection Establishment Option that was provided during NIDD Configuration to decide how to handle the absence of a PDN connection.	
NOTE 1: Properties marked with a feature as defined in clause 5.6.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features unless stated otherwise.				

## 5.6.2.2 Referenced structured data types

### 5.6.2.2.1 Introduction

This clause defines structured data types that are referenced from data structures defined in the previous clauses.

#### 5.6.2.2.2 Type: RdsPort

This type represents the port configuration for Reliable Data Transfer. It shall comply with the provisions defined in table 5.6.2.2-1.

**Table 5.6.2.2-1: Definition of RdsPort data Type**

Attribute name	Data type	Cardinality	Description
portUE	Port	1	Indicates the port number on UE that is used for reliable data transfer with a specific application on UE using RDS (as defined in clause 5.2.4 and 5.2.5 of 3GPP TS 24.250 [31]).
portSCEF	Port	1	Indicates the port number on SCEF that is used for reliable data transfer with a specific application on SCEF using RDS (as defined in clause 5.2.4 and 5.2.5 of 3GPP TS 24.250 [31]).

### 5.6.2.2.3 Type: GmdResult

This type represents the group message delivery result. It shall comply with the provisions defined in table 5.6.2.2.3-1.

**Table 5.6.2.2.3-1: Definition of GmdResult data Type**

Attribute name	Data type	Cardinality	Description
externalId	ExternalId	0..1	Each element uniquely identifies a user as defined in subclause 4.6.2 of 3GPP TS 23.682 [2]. (NOTE)
msisdn	Msisdn	0..1	Each element identifies the MS internal PSTN/ISDN number allocated for a UE. (NOTE)
deliveryStatus	DeliveryStatus	1	Indicates the MT NIDD delivery status.
requestedRetransmissionTime	DateTime	0..1	Identifies the absolute time at which the UE will be reachable. This parameter may be supplied by the SCEF for delivery status "FAILURE_TEMPORARILY_NOT_REACHABLE"
NOTE: One of the properties "externalId" or "msisdn" shall be included.			

### 5.6.2.2.4 Type: NiddDownlinkDataDeliveryFailure

This type represents the failure delivery result. It shall comply with the provisions defined in table 5.6.2.2.4-1.

**Table 5.6.2.2.4-1: Definition of NiddDownlinkDataDeliveryFailure data Type**

Attribute name	Data type	Cardinality	Description
problemDetail	ProblemDetails	1	Detailed problem as defined in clause 5.2.1.2.12.
requestedRetransmissionTime	DateTime	0..1	Identifies the absolute time at which the UE will be reachable. This parameter may be supplied by the SCEF for error indicating "TEMPORARILY_NOT_REACHABLE"

### 5.6.2.2.5 Type: RdsDownlinkDataDeliveryFailure

This type represents the failure delivery result for RDS. It shall comply with the provisions defined in table 5.6.2.2.5-1.

**Table 5.6.2.2.5-1: Definition of RdsDownlinkDataDeliveryFailure data Type**

Attribute name	Data type	Cardinality	Description
requestedRetransmissionTime	DateTime	0..1	Identifies the absolute time at which the UE will be reachable. This parameter may be supplied by the SCEF for error indicating "TEMPORARILY_NOT_REACHABLE"
supportedUeFormats	array(SerializationFormat)	0..N	Indicates the serialization format(s) that are supported by the UE on the associated RDS port. This parameter may be supplied by the SCEF for error indicating "SERIALIZATION_FORMAT_NOT_SUPPORTED"
NOTE: This data type also contains all the properties defined for ProblemDetails data type in clause 5.2.1.2.12.			

### 5.6.2.3 Referenced simple data types and enumerations

#### 5.6.2.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses. In addition, data types and enumerations defined in clause 5.2.1 can be referenced.

#### 5.6.2.3.2 Simple data types

The simple data types defined in table 5.6.2.3.2-1 shall be supported.

**Table 5.6.2.3.2-1: Simple data types**

Type name	Description

#### 5.6.2.3.3 Enumeration: PdnEstablishmentOptions

The enumeration PdnEstablishmentOptions represents PDN establishment options that describe the network behaviour when there is no PDN connection towards the addressed UE.

**Table 5.6.2.3.3-1: Enumeration PdnEstablishmentOptions**

Enumeration value	Description	Applicability (NOTE)
WAIT_FOR_UE	wait for the UE to establish the PDN connection	
INDICATE_ERROR	respond with an error cause	
SEND_TRIGGER	send a device trigger	
NOTE: Properties marked with a feature as defined in clause 5.6.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.		

#### 5.6.2.3.4 Enumeration: DeliveryStatus

The enumeration DeliveryStatus represents the status of a downlink NIDD data delivery resource.

**Table 5.6.2.3.4-1: Enumeration DeliveryStatus**

Enumeration value	Description	Applicability (NOTE)
SUCCESS	Success but details not provided	
SUCCESS_NEXT_HOP_ACKNOWLEDGED	Successful delivery to the next hop with acknowledgment.	
SUCCESS_NEXT_HOP_UNACKNOWLEDGED	Successful delivery to the next hop without acknowledgment	
SUCCESS_ACKNOWLEDGED	Reliable delivery was acknowledged by the UE	
SUCCESS_UNACKNOWLEDGED	Reliable delivery was not acknowledged by the UE	
TRIGGERED	The SCEF triggered the device and is buffering the data.	
BUFFERING	The SCEF is buffering the data due to no PDN connection established.	
BUFFERING_TEMPORARILY_NOT_REACHABLE	The SCEF has been informed that the UE is temporarily not reachable but is buffering the data	
SENDING	The SCEF has forwarded the data, but they may be stored elsewhere.	
FAILURE	Delivery failure but details not provided	
FAILURE_RDS_DISABLED	RDS was disabled.	
FAILURE_NEXT_HOP	Unsuccessful delivery to the next hop.	
FAILURE_TIMEOUT	Unsuccessful delivery due to timeout.	
FAILURE_TEMPORARILY_NOT_REACHABLE	The SCEF has been informed that the UE is temporarily not reachable without buffering the data.	
NOTE:	Properties marked with a feature as defined in clause 5.6.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.	

#### 5.6.2.3.5 Enumeration: NiddStatus

The enumeration NiddStatus represents the status of a NIDD configuration.

**Table 5.6.2.3.5-1: Enumeration NiddStatus**

Enumeration value	Description	Applicability (NOTE)
ACTIVE	The NIDD configuration is active.	
TERMINATED_UE_NOT_AUTHORIZED	The NIDD configuration was terminated because the UE's authorisation was revoked.	
TERMINATED	The NIDD configuration was terminated.	
RDS_PORT_UNKNOWN	The RDS port is unknown.	Rds_port_verification
NOTE:	Properties marked with a feature as defined in clause 5.6.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.	

#### 5.6.2.3.6 Enumeration: PdnEstablishmentOptionsRm

The enumeration PdnEstablishmentOptionsRm represents PDN establishment options that describe the network behaviour when there is no PDN connection towards the addressed UE. It is defined in clause 5.6.2.3.3 but also allows null value (specified as "NullValue" data type) so it can be removed in "JSON Merge Patch", as defined in IETF RFC 7396 [39].

**Table 5.6.2.3.6-1: Enumeration PdnEstablishmentOptionsRm**

Enumeration value	Description	Applicability (NOTE)
WAIT_FOR_UE	wait for the UE to establish the PDN connection	
INDICATE_ERROR	respond with an error cause	
SEND_TRIGGER	send a device trigger	
NOTE:	Properties marked with a feature as defined in clause 5.6.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.	

### 5.6.2.3.7 Enumeration: ManageEntity

The enumeration ManageEntity represents the origin that manages the RDS port.

**Table 5.6.2.3.7-1: Enumeration ManageEntity**

Enumeration value	Description	Applicability
UE	Representing the UE.	
AS	Representing the Application Server	

### 5.6.2.3.8 Enumeration: SerializationFormat

The enumeration SerializationFormat represents a serialization format associated with an RDS port which is applicable for the Rds\_serialization\_format feature.

**Table 5.6.2.3.8-1: Enumeration SerializationFormat**

Enumeration value	Description	Applicability (NOTE)
CBOR	The CBOR Serialzition format	
JSON	The JSON Serialzition format	
XML	The XML Serialzition format	

## 5.6.3 Resource structure

### 5.6.3.1 General

All resource URIs of this API should have the following root:

**{apiRoot}/3gpp-nidd/v1**

"apiRoot" is set as described in clause 5.2.4. "apiName" shall be set to "3gpp-nidd" and "apiVersion" shall be set to "v1" for the version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:

Table 5.6.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	HTTP initiator	Meaning
NIDD configurations	//{scsAsId}/configurations	GET	SCS/AS	Read all NIDD configuration resources for a given SCS/AS.
		POST	SCS/AS	Create a new NIDD configuration resource.
Individual NIDD configuration	//{scsAsId}/configurations/{configurationId}	PATCH	SCS/AS	Modify an existing NIDD configuration resource.
		GET	SCS/AS	Read an NIDD configuration resource.
		DELETE	SCS/AS	Delete an existing NIDD configuration resource.
NIDD downlink data deliveries	//{scsAsId}/configurations/{configurationId}/downlink-data-deliveries	GET	SCS/AS	Read all pending NIDD downlink data delivery resources related to a particular NIDD configuration resource.
		POST	SCS/AS	Create an NIDD downlink data delivery resource related to a particular NIDD configuration resource.
Individual NIDD downlink data delivery	//{scsAsId}/configurations/{configurationId}/downlink-data-deliveries/{downlinkDataDeliveryId}	PUT	SCS/AS	Replace an Individual NIDD downlink data delivery resource.
		PATCH	SCS/AS	Modify an Individual NIDD downlink data delivery resource.
		DELETE	SCS/AS	Delete an NIDD downlink data delivery resource.
		GET	SCS/AS	Read pending NIDD downlink data delivery resource.
ManagePort Configurations	//{scsAsId}/configurations/{configurationId}/rds-ports	GET	SCS/AS	Read all RDS ManagePort Configurations.
Individual ManagePort Configuration	//{scsAsId}/configurations/{configurationId}/rds-ports/{portId}	PUT	SCS/AS	Create a new Individual ManagePort Configuration resource to reserve port numbers.
		DELETE	SCS/AS	Delete an Individual ManagePort Configuration resource to release port numbers.
		GET	SCS/AS	Read an Individual ManagePort Configuration resource to query port numbers.

### 5.6.3.2 Resource: NIDD Configurations

#### 5.6.3.2.1 Introduction

This resource allows the SCS/AS to create an NIDD configuration at the SCEF, and read all NIDD configurations in the SCEF.

## 5.6.3.2.2 Resource definition

Resource URI: {apiRoot}/3gpp-nidd/v1/{scsAsId}/configurations

This resource shall support the resource URI variables defined in table 5.6.3.2.2-1.

**Table 5.6.3.2.2-1: Resource URI variables for resource "NIDD Configurations"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.

## 5.6.3.2.3 Resource methods

## 5.6.3.2.3.1 GET

The GET method allows to read all active NIDD configurations for a given SCS/AS. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.6.3.2.3.1-1 and table 5.6.3.2.3.1-2.

**Table 5.6.3.2.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.6.3.2.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	array(NiddConfiguration)	0..N	200 OK	The configuration information for the SCS/AS in the request URI are returned.
	None		307 Temporary Redirect	Temporary redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
None		308 Permanent Redirect	Permanent redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	

NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.

**Table 5.6.3.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.6.3.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.6.3.2.3.2 PUT

This HTTP method is not supported for the resource.

## 5.6.3.2.3.3 PATCH

This HTTP method is not supported for the resource.

## 5.6.3.2.3.4 POST

To create a NIDD configuration, the SCS/AS shall use the HTTP POST method on the "configurations" collection resource as follows:

- the body of the message is encoded in JSON format with the data structure defined in table 5.6.2.1.2-1.

The possible response messages from the SCEF, depending on whether the POST request is successful or unsuccessful, are shown in table 5.6.3.2.3.4-1.

**Table 5.6.3.2.3.4-1: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	NiddConfiguration	1	Parameters to create and authorize a NIDD configuration with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	NiddConfiguration	1	201 Created	<p>The NIDD configuration was created successfully.</p> <p>The SCEF shall return a data structure of type "NiddConfiguration" in the response content.</p> <p>The URI of the created resource shall be returned in the "Location" HTTP header.</p>
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.				

**Table 5.6.3.2.3.4-2: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-nidd/v1/{scsAsId}/configurations/{configurationId}

## 5.6.3.2.3.5 DELETE

This HTTP method is not supported for the resource.

## 5.6.3.3 Resource: Individual NIDD Configuration

## 5.6.3.3.1 Introduction

This resource allows the SCS/AS to query/update/cancel the specific NIDD configuration at the SCEF.



## 5.6.3.3.2 Resource definition

Resource URI: {apiRoot}/3gpp-nidd/v1/{scsAsId}/configurations/{configurationId}

This resource shall support the resource URI variables defined in table 5.6.3.3.2-1.

**Table 5.6.3.3.2-1: Resource URI variables for resource "Individual NIDD Configuration"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
configurationId	string	Identifier of the configuration. The configurationId corresponds to the stage 2 TLTRI.

## 5.6.3.3.3 Resource methods

## 5.6.3.3.3.1 GET

The GET method allows to read a NIDD configuration resource to obtain details of an active configuration. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.6.3.3.3.1-1 and table 5.6.3.3.3.1-2.

**Table 5.6.3.3.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.6.3.3.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	None			
Response body	Data type	Cardinality	Response codes	Remarks
	NiddConfiguration	1	200 OK	The configuration information related to the request URI is returned.
	None		307 Temporary Redirect	Temporary redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	None		308 Permanent Redirect	Permanent redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.6.3.3.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.6.3.3.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.6.3.3.3.2 PUT

This HTTP method is not supported for the resource.

5.6.3.3.3.3 PATCH

Assuming that a NIDD configuration has been created using the HTTP POST method described in clause 5.6.3.2.3.4, partial updating of its properties can be performed by the SCS/AS by using the HTTP PATCH method on the "configuration" instance resource as follows:

- the body of the message is encoded in JSON format with the data structure defined in table 5.6.2.1.2-1

The possible response messages from the SCEF, depending on whether the PATCH request is successful or unsuccessful, are shown in table 5.6.3.3.3.3-1.

**Table 5.6.3.3.3.3-1: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	NiddConfigurationPatch	1	Parameters to update a NIDD configuration with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	NiddConfiguration	1	200 OK	The NIDD configuration was modified successfully. The SCEF shall return an updated data structure of type "NiddConfiguration" in the response content.
	None		204 No Content	The NIDD configuration has been modified successfully and no content is to be sent in the response message body.
	None		307 Temporary Redirect	Temporary redirection, during configuration modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
None		308 Permanent Redirect	Permanent redirection, during configuration modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 also apply.				

**Table 5.6.3.3.3.3-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.6.3.3.3.3-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.6.3.3.3.4 POST

This HTTP method is not supported for the resource.

5.6.3.3.3.5 DELETE

To cancel a NIDD configuration, the SCS/AS shall use the HTTP DELETE method on the individual "NIDD configuration" resource which is indicated by the URI in the Location header of the HTTP POST response:

The possible response messages from the SCEF, depending on whether the DELETE request is successful or unsuccessful, are shown in Table 5.6.3.3.3.5-1.

**Table 5.6.3.3.3.5-1.: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	NiddConfiguration	1	200 OK	The NIDD configuration was cancelled successfully. The SCEF shall return a full representation of the deleted resource including a data structure of type "NiddConfiguration" with a "TERMINATE" status in the response body.
	None		204 No Content	The NIDD configuration was cancelled successfully. The response body shall be empty.
	None		307 Temporary Redirect	Temporary redirection, during configuration termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	None		308 Permanent Redirect	Permanent redirection, during configuration termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				

**Table 5.6.3.3.3.5-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.6.3.3.3.5-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.6.3.4 Resource: NIDD downlink data deliveries

5.6.3.4.1 Introduction

This resource allows the SCS/AS to read all pending NIDD downlink data delivery resources for a particular NIDD configuration resource.

This resource also allows the SCS/AS to create an NIDD downlink data delivery.

This resource is applicable for a single UE and a group of UEs NIDD MT delivery.

5.6.3.4.2 Resource definition

Resource URI: {apiRoot}/3gpp-nidd/v1/{scsAsId}/configurations/{configurationId}/downlink-data-deliveries

This resource shall support the resource URI variables defined in table 5.6.3.4.2-1.

**Table 5.6.3.4.2-1: Resource URI variables for resource "NIDD Downlink Data Deliveries"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
configurationId	string	Identifier of the configuration.

5.6.3.4.3 Resource methods

5.6.3.4.3.1 GET

The GET method allows to read all pending NIDD downlink data deliveries for a given SCS/AS and NIDD configuration. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.6.3.4.3.1-1 and table 5.6.3.4.3.1-2.

**Table 5.6.3.4.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.6.3.4.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	None			
Response body	Data type	Cardinality	Response codes	Remarks
	array(NiddDownlinkData Transfer)	0..N	200 OK	All pending NIDD downlink data deliveries for the SCS/AS and NIDD configuration in the request URI are returned.
	None		307 Temporary Redirect	Temporary redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
None		308 Permanent Redirect	Permanent redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	

NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.

**Table 5.6.3.4.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.6.3.4.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.6.3.4.3.2 PUT

This HTTP method is not supported for the resource.

#### 5.6.3.4.3.3 PATCH

This HTTP method is not supported for the resource.

#### 5.6.3.4.3.4 POST

To deliver the downlink non-IP data, the SCS/AS shall use the HTTP POST method on the "NIDD downlink data deliveries" resource with the body of the message is encoded in JSON format with the data structure defined in table 5.6.2.1.3-1.

The possible response messages from the SCEF, depending on whether the POST request is successful or unsuccessful, are shown in Table 5.6.3.4.3.4-1.

**Table 5.6.3.4.3.4-1: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	NiddDownlinkDataTransfer	1	The parameters and non-IP data for the MT delivery.	
Response body	Data type	Cardinality	Response codes	Remarks
	NiddDownlinkDataTransfer	1	200 OK	The NIDD downlink data delivery was successful. The SCEF shall return a data structure of type "NiddDownlinkDataTransfer" in the response content.
	NiddDownlinkDataTransfer	1	201 Created	The NIDD downlink data delivery request was accepted by the SCEF, the NIDD will be performed later. The SCEF shall return a data structure of type "NiddDownlinkDataTransfer" in the response content, and shall return the URI of the resource representing the downlink data transfer in the "Location" header.
	None		307 Temporary Redirect	Temporary redirection, during NIDD downlink data delivery. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	None		308 Permanent Redirect	Permanent redirection, during NIDD downlink data delivery. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	NiddDownlinkDataDeliveryFailure	0..1	500 Internal Server Error	(NOTE 2)

NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.  
NOTE 2: Failure cases are described in clause 5.6.5.3.

**Table 5.6.3.4.3.4-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.6.3.4.3.4-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.6.3.4.3.4-2: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-nidd/v1/{scsAsId}/configurations/{configurationId}/downlink-data-deliveries/{downlinkDataDeliveryId}

## 5.6.3.4.3.5 DELETE

This HTTP method is not supported for the resource.

## 5.6.3.5 Resource: Individual NIDD downlink data delivery

## 5.6.3.5.1 Introduction

For NIDD MT delivery for a single UE, this resource allows the SCS/AS to read a pending NIDD downlink delivery resource, or to replace or cancel an NIDD downlink data delivery resource related to an NIDD configuration resource.

For NIDD MT delivery for a group of UEs, this resource allows the SCS/AS to read a pending NIDD downlink delivery resource related to a NIDD configuration resource.

## 5.6.3.5.2 Resource definition

Resource URI: **{apiRoot}/3gpp-nidd/v1/{scsAsId}/configurations/{configurationId}/downlink-data-deliveries/{downlinkDataDeliveryId}**

This resource shall support the resource URI variables defined in table 5.6.3.5.2-1.

**Table 5.6.3.4.2-1: Resource URI variables for resource "Individual NIDD Downlink Data Delivery"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
configurationId	string	Identifier of the configuration.
downlinkDataDeliveryId	string	Identifier of the downlink data delivery.

## 5.6.3.5.3 Resource methods

## 5.6.3.5.3.1 GET

The GET method allows to read a NIDD downlink data delivery resource to obtain details. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.6.3.5.3.1-1 and table 5.6.3.5.3.1-2.

**Table 5.6.3.5.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.6.3.5.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	NiddDownlinkDataTransfer	1	200 OK	Individual NIDD downlink data delivery resource is returned.
	None		307 Temporary Redirect	Temporary redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	None		308 Permanent Redirect	Permanent redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.6.3.5.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.6.3.5.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.6.3.5.3.2 PUT

To replace the buffered downlink non-IP data, the SCS/AS shall use the HTTP PUT method on the "Individual NIDD downlink data delivery" resource with the body of the message encoded in JSON format with the data structure defined in table 5.6.2.1.3-1.

The possible response messages from the SCEF, depending on whether the PUT request is successful or unsuccessful, are shown in Table 5.6.3.5.3.2-1.



**Table 5.6.3.5.3.2-1: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	NiddDownlinkDataTransfer	1	The parameters and non-IP data for the MT delivery.	
Response body	Data type	Cardinality	Response codes	Remarks
	NiddDownlinkDataTransfer	1	200 OK	The update of the Individual NIDD downlink data delivery resource was successful.  The SCEF shall return an updated representation of the resource within the NiddDownlinkDataTransfer data structure in the response message body.
	None		204 No Content	The update of the Individual NIDD downlink data delivery was successful and no content is to be sent in the response message body.
	None		307 Temporary Redirect	Temporary redirection, during configuration modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.
	None		308 Permanent Redirect	Permanent redirection, during configuration modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)
	ProblemDetails	0..1	404 Not Found	(NOTE 2)
	ProblemDetails	0..1	409 Conflict	(NOTE 2)
	NiddDownlinkDataDeliveryFailure	0..1	500 Internal Server Error	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				
NOTE 2: Failure cases are described in clause 5.6.5.3.				

**Table 5.6.3.5.3.2-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.6.3.5.3.2-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.6.3.5.3.3 PATCH

If the "PatchUpdate" feature defined in clause 5.7.4 is supported, to partially modify the buffered downlink non-IP data, the SCS/AS shall use the HTTP PATCH method on the "Individual NIDD downlink data delivery" resource with the body of the message encoded in JSON format with the data structure defined in table 5.6.2.1.11-1.

The possible response messages from the SCEF, depending on whether the HTTP PATCH request is successful or unsuccessful, are shown in Table 5.6.3.5.3.3-1.

**Table 5.6.3.5.3.3-1: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	NiddDownlinkDataTransferPatch	1	The parameters to modify an existing Individual NIDD downlink data delivery resource.	
Response body	Data type	Cardinality	Response codes	Remarks
	NiddDownlinkDataTransfer	1	200 OK	The modification of the Individual NIDD downlink data delivery resource was successful.  The SCEF shall return an updated representation of the resource within the NiddDownlinkDataTransfer data structure in the response message body.
	n/a		204 No Content	The modification of the Individual NIDD downlink data delivery resource was successful and no content is to be sent in the response message body.
	n/a		307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.
	n/a		308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)
	ProblemDetails	0..1	404 Not Found	(NOTE 2)
	ProblemDetails	0..1	409 Conflict	(NOTE 2)
	NiddDownlinkDataDeliveryFailure	0..1	500 Internal Server Error	(NOTE 2)

NOTE 1: The mandatory HTTP error status codes for the HTTP PATCH method listed in table 5.2.6-1 also apply.  
NOTE 2: Failure cases are described in clause 5.6.5.3.

**Table 5.6.3.5.3.3-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.6.3.5.3.3-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.6.3.5.3.4 POST

This HTTP method is not supported for the resource.

5.6.3.5.3.5 DELETE

To cancel a NIDD downlink data delivery, the SCS/AS shall use the HTTP DELETE method on the "Individual NIDD downlink data delivery" resource which is indicated by the URI in the Location header of the HTTP POST response:

The possible response messages from the SCEF, depending on whether the DELETE request is successful or unsuccessful, are shown in table 5.6.3.3.3.5-1.

**Table 5.6.3.5.3.5-1.: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
none			.	
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The NIDD downlink data delivery was cancelled successfully. The response body shall be empty.
	None		307 Temporary Redirect	Temporary redirection, during configuration termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	None		308 Permanent Redirect	Permanent redirection, during configuration termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)
	ProblemDetails	0..1	404 Not Found	(NOTE 2)
	ProblemDetails	0..1	409 Conflict	(NOTE 2)
	NiddDownlinkDataDeliveryFailure	0..1	500 Internal Server Error	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				
NOTE 2: Failure cases are described in clause 5.6.5.3.				

**Table 5.6.3.5.3.5-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.6.3.5.3.5-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.6.3.6 Void

5.6.3.7 Void

5.6.3.8 Void

5.6.3.9 Resource: Individual ManagePort Configuration

5.6.3.9.1 Introduction

This resource allows the SCS/AS to create, delete or read the specific ManagePort configuration at the SCEF.

5.6.3.9.2 Resource definition

Resource URI: {apiRoot}/3gpp-nidd/v1/{scsAsId}/configurations/{configurationId}/rds-ports/{portId}

This resource shall support the resource URI variables defined in table 5.6.3.9.2-1.

**Table 5.6.3.9.2-1: Resource URI variables for resource "Individual ManagePort Configuration"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
configurationId	string	Identifier of the configuration. The configurationId corresponds to the stage 2 TLTRI.
portId	string	UE port identifier including both UE port number and exposure function port number. Pattern: " <sup>ue</sup> ([0-9])([1[0-5]])-ef([0-9])([1[0-5]])\$".

5.6.3.9.3 Resource methods

5.6.3.9.3.1 GET

The GET method allows to read a ManagePort configuration resource to query the ports reserved. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.6.3.9.3.1-1 and table 5.6.3.9.3.1-2.

**Table 5.6.3.9.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.6.3.9.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	None			
Response body	Data type	Cardinality	Response codes	Remarks
	ManagePort	1	200 OK	The configuration information related to the request URI is returned.
	None		307 Temporary Redirect	Temporary redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	None		308 Permanent Redirect	Permanent redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.6.3.9.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.6.3.9.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.6.3.9.3.2 PUT

To create a ManagePort configuration and reserve a port number, the SCS/AS shall use the HTTP PUT method on the "ManagePort" resource with the body of the message is encoded in JSON format with the data structure defined in table 5.6.3.9.3.2-1.

The possible response messages from the SCEF, depending on whether the PUT request is successful or unsuccessful, are shown in Table 5.6.3.9.3.2-1.

**Table 5.6.3.9.3.2-1: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	ManagePort	1	The ManagePort configuration to be created which represents the information used for reserving the port configuration for an application.	
Response body	Data type	Cardinality	Response codes	Remarks
	ManagePort	1	201 Created	This indicates the reservation of port configuration for specified application is successful.
	None		202 Accepted	This indicates the request for reservation of port configuration for specified application is accepted and under processing.
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)
	RdsDownlinkDataDeliveryFailure	0..1	500 Internal Server Error	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				
NOTE 2: Failure cases are described in clause 5.6.5.3.				

**5.6.3.9.3.3 PATCH**

This HTTP method is not supported for the resource.

**5.6.3.9.3.4 POST**

This HTTP method is not supported for the resource.

**5.6.3.9.3.5 DELETE**

To cancel a ManagePort configuration and release port numbers, the SCS/AS shall use the HTTP DELETE method on the ManagePort resource which is indicated by the URI in the Location header of the HTTP POST response:

The possible response messages from the SCEF, depending on whether the DELETE request is successful or unsuccessful, are shown in Table 5.6.3.9.3.5-1.

**Table 5.6.3.9.3.5-1.: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	ManagePort	1	The ManagePort configuration to be cancelled which represents the information used for releasing the port configuration for an application	
Response body	Data type	Cardinality	Response codes	Remarks
	None		204 No Content	The ManagePort configuration was cancelled successfully and the port configuration was released.
	None		202 Accepted	This indicates the request for cancellation of port configuration for specified application is accepted and under processing.
	None		307 Temporary Redirect	Temporary redirection, during configuration termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.
	None		308 Permanent Redirect	Permanent redirection, during configuration termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.
	ProblemDetails	0..1	404 Not Found	(NOTE 2)
	RdsDownlinkDataDeliveryFailure	0..1	500 Internal Server Error	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply. NOTE 2: Failure cases are described in clause 5.6.5.3.				

**Table 5.6.3.9.3.5-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.6.3.9.3.5-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.6.3.10 Void

5.6.3.11 Resource: ManagePort Configurations

5.6.3.11.1 Introduction

This resource allows the SCS/AS to read all ManagePort configurations for a given NIDD configuration at the SCEF.

## 5.6.3.11.2 Resource definition

Resource URI: {apiRoot}/3gpp-nidd/v1/{scsAsId}/configurations/{configurationId}/rds-ports

This resource shall support the resource URI variables defined in table 5.6.3.11.2-1.

**Table 5.6.3.11.2-1: Resource URI variables for resource "ManagePort Configurations"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
configurationId	string	Identifier of the configuration of type string. The configurationId corresponds to the stage 2 TLTRI.

## 5.6.3.11.3 Resource methods

## 5.6.3.11.3.1 GET

The GET method allows to read all ManagePort configurations on the SCEF. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.6.3.11.3.1-1 and table 5.6.3.11.3.1-2.

**Table 5.6.3.11.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.6.3.11.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	None			
Response body	Data type	Cardinality	Response codes	Remarks
	array(ManagePort)	0..N	200 OK	All RDS dynamic port configuration information related to the request URI are returned.
	None		307 Temporary Redirect	Temporary redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	None		308 Permanent Redirect	Permanent redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.

**Table 5.6.3.11.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.



**Table 5.6.3.11.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.6.3.11.3.2 PUT

This HTTP method is not supported for the resource.

#### 5.6.3.11.3.3 PATCH

This HTTP method is not supported for the resource.

#### 5.6.3.11.3.4 POST

This HTTP method is not supported for the resource.

#### 5.6.3.11.3.5 DELETE

This HTTP method is not supported for the resource.

### 5.6.3A Notifications

#### 5.6.3A.1 General

The notifications provided by the NIDD API are specified in this clause.

**Table 5.6.3A-1: Notifications overview**

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
NIDD Configuration Update Notification	{notification_uri}	POST	Send notifications about the status of an NIDD configuration to the SCS/AS.
NIDD Downlink Data Delivery Status Notification	{notification_uri}	POST	Report a specific NIDD downlink data delivery result to the SCS/AS.
NIDD Uplink Data Notification	{notification_uri}	POST	Send an uplink non-IP data notification from the SCEF to the SCS/AS.
ManagePort Notification	{notification_uri}	POST	Send notifications about the port numbers that are reserved.

#### 5.6.3A.2 NIDD Configuration Update Notification

##### 5.6.3A.2.1 Description

The NIDD Configuration Update Notification allows the SCEF to send notifications about the status of an NIDD configuration to the SCS/AS.

## 5.6.3A.2.2 Target URI

The Callback URI "{notification\_uri}" shall be used with the callback URI variables defined in table 5.6.3A.2.2-1.

Table 5.6.3A.2.2-1: Callback URI variables

Name	Data type	Definition
notification_uri	Link	A URI indicating the notification destination where T8 notification requests shall be delivered. This URI shall be provided within the "notificationDestination" attribute in the NiddConfiguration type.

## 5.6.3A.2.3 Standard Methods

## 5.6.3A.2.3.1 Notification via POST

To report the status of the NIDD configuration to the SCS/AS, the SCEF shall use the HTTP POST method on the notification point as follows:

- the body of the message is encoded in JSON format with the data structure defined in table 5.6.2.1.6-1.

This method shall support the request data structures specified in table 5.6.3A.2.3.1-1 and the response data structures and response codes specified in table 5.6.3A.2.3.1-2.

Table 5.6.3A.2.3.1-1: Data structures supported by the POST Request Body

Data type	Cardinality	Description
NiddConfigurationStatusNotification	1	The NIDD configuration status notification.

Table 5.6.3A.2.3.1-2: Data structures supported by the POST Response Body

Data type	Cardinality	Response codes	Description
Acknowledgement	1	200 OK	The successful acknowledgement of the notification with a body.
(None)		204 No Content	The successful acknowledgement of the notification without a body.
None		307 Temporary Redirect	Temporary redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
None		308 Permanent Redirect	Permanent redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

Table 5.6.3A.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.6.3A.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

#### 5.6.3A.2.3.2 Notification via Websocket

If supported by both SCS/AS and SCEF and successfully negotiated, the NiddConfigurationStatusNotification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4.

### 5.6.3A.3 NIDD Downlink Data Delivery Status Notification

#### 5.6.3A.3.1 Description

The NIDD Downlink Data Delivery Status Notification allows the SCEF to send notifications about the status of downlink NIDD data delivery to the SCS/AS. This resource is applicable for a single UE and a group of UEs NIDD MT delivery.

#### 5.6.3A.3.2 Target URI

The Callback URI "{notification\_uri}" shall be used with the callback URI variables defined in table 5.6.3A.3.2-1.

**Table 5.6.3A.3.2-1: Callback URI variables**

Name	Data type	Definition
notification_uri	Link	A URI indicating the notification destination URI where T8 notification requests shall be delivered. This URI shall be provided within the "notificationDestination" attribute in the NiddConfiguration type.

#### 5.6.3A.3.3 Standard Methods

##### 5.6.3A.3.3.1 Notification via POST

To report the delivery status of the downlink non-IP data delivery, the SCEF shall use the HTTP POST method on the notification endpoint with the body of the message encoded in JSON format with the data structure defined in table 5.6.2.1.5-1 for a single UE or table 5.6.2.1.8-1 for a group of UEs.

This method shall support the request and response data structures specified in table 5.6.3A.3.3.1-1 and table 5.6.3A.3.3.1-2 for a single UE, and support the request and response data structures specified in table 5.6.3A.3.3.1-3 and table 5.6.3A.3.3.1-4 for a group of UEs.

**Table 5.6.3A.3.3.1-1: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
NiddDownlinkDataDeliveryStatusNotification	1	The Down link data delivery status notification for a single UE.

**Table 5.6.3A.3.3.1-2: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
Acknowledgement	1	200 OK	The successful acknowledgement of the notification.
(None)		204 No Content	The successful acknowledgement of the notification without a body.
None		307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
None		308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.6.3A.3.3.1-3: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
GmdNiddDownlinkDataDeliveryStatusNotification	1	The Down link data delivery status notification for a group of UEs.

**Table 5.6.3A.3.3.1-4: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
Acknowledgement	1	200 OK	The successful acknowledgement of the notification.
(None)		204 No Content	The successful acknowledgement of the notification without a body.
None		307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
None		308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.6.3A.3.3.1-5: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.6.3A.3.3.1-6: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

### 5.6.3A.3.3.2 Notification via WebSocket

If supported by both SCS/AS and SCEF and successfully negotiated, the NiddDownlinkDataDeliveryStatusNotification or GmdNiddDownlinkDataDeliveryStatusNotification may alternatively be delivered for a single UE or a group of UEs through the WebSocket mechanism as defined in clause 5.2.5.4.

## 5.6.3A.4 NIDD Uplink Data Notification

### 5.6.3A.4.1 Description

The NIDD Uplink Data Notification allows the SCEF to send notifications about received NIDD uplink data..

### 5.6.3A.4.2 Target URI

The Callback URI "{notification\_uri}" shall be used with the callback URI variables defined in table 5.6.3A.4.2-1.

**Table 5.6.3A.4.2-1: Callback URI variables**

Name	Data type	Definition
notification_uri	Link	A URI indicating the notification destination URI where T8 notification requests shall be delivered. This URI shall be provided within the "notificationDestination" attribute in the NiddConfiguration type.

### 5.6.3A.4.3 Standard Methods

#### 5.6.3A.4.3.1 Notification via POST

To send the uplink non-IP data to the SCS/AS, the SCEF shall use the HTTP POST method on the notification endpoint in SCS/AS as follows:

- the body of the message is encoded in JSON format with the data structure defined in table 5.6.2.1.4-1.

This method shall support the request data structures specified in table 5.6.3A.4.3.1-1 and the response data structures and response codes specified in table 5.6.3A.4.3.1-2.

**Table 5.6.3A.4.3.1-1: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
NiddUplinkDataNotification	1	The parameters and non-IP data for the NIDD uplink non-IP data notification.

**Table 5.6.3A.4.3.1-2: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
Acknowledgement	1	200 OK	The successful acknowledgement of the uplink data notification
(None)		204 No Content	The successful acknowledgement of the notification without a body.
None		307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
None		308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.			

**Table 5.6.3A.4.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.6.3A.4.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

#### 5.6.3A.4.3.2 Notification via Websocket

If supported by both SCS/AS and SCEF and successfully negotiated, the NiddUplinkDataNotification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4.

### 5.6.3A.5 ManagePort Notification

#### 5.6.3A.5.1 Description

The ManagePort Notification allows the SCEF to send notifications about the port numbers that are reserved.

#### 5.6.3A.5.2 Target URI

The Callback URI "{notification\_uri}" shall be used with the callback URI variables defined in table 5.6.3A.5.2-1.

**Table 5.6.3A.5.2-1: Callback URI variables**

Name	Data type	Definition
notification_uri	Link	A URI indicating the notification destination URI where T8 notification requests shall be delivered. This URI shall be provided within the "notificationDestination" attribute in the NiddConfiguration type.

## 5.6.3A.5.3 Standard Methods

## 5.6.3A.5.3.1 Notification via POST

To send the information about reserved ports and their configuration to the SCS/AS, the SCEF shall use the HTTP POST method on the notification endpoint in SCS/AS as follows:

- the body of the message is encoded in JSON format with the data structure defined in table 5.6.2.1.10-1.

This method shall support the request data structures specified in table 5.6.3A.5.3.1-1 and the response data structures and response codes specified in table 5.6.3A.5.3.1-2.

**Table 5.6.3A.5.3.1-1: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
ManagePortNotification	1	The parameters that represents the information about port numbers that are reserved for use with an application.

**Table 5.6.3A.5.3.1-2: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
Acknowledgement	1	200 OK	The successful notification of reserved port configuration.
(None)		204 No Content	The successful acknowledgement of the reserved port configuration without a body.
None		307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
None		308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.6.3A.5.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.6.3A.5.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

## 5.6.3A.5.3.2 Notification via Websocket

If supported by both SCS/AS and SCEF and successfully negotiated, the ManagePortNotification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4.

## 5.6.4 Used Features

The table below defines the features applicable to the NIDD API. Those features are negotiated as described in clause 5.2.7.

**Table 5.6.4-1: Features used by NIDD API**

Feature Number	Feature	Description
1	GroupMessageDelivery	This feature indicates the support of group message delivery via MT NIDD as defined in clause 5.5.3 of 3GPP TS 23.682 [2].
2	Notification_websocket	The delivery of notifications over Websocket is supported according to clause 5.2.5.4. This feature requires that the Notification_test_event feature is also supported.
3	Notification_test_event	The testing of notification connection is supported according to clause 5.2.5.3.
4	MT_NIDD_modification_cancellation	Modification and cancellation of an individual MT NIDD resource.
5	Rds_port_verification	This feature indicates the support of RDS port verification in the MO/MT NIDD delivery.
6	Rds_dynamic_port	This feature indicates the support of RDS dynamic port management.
7	Rds_serialization_format	This feature indicates the support of RDS Serialization Format reservation, notification, and query. This feature requires that the Rds_dynamic_port is also supported.
8	PatchUpdate	Indicates the support of enhancements to the northbound interfaces (e.g. support the partial modification of an existing subscription resource).
Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification". Description: A clear textual description of the feature.		

## 5.6.5 Error handling

### 5.6.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

### 5.6.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the NIDD API.

### 5.6.5.3 Application Errors

The application errors defined for the NIDD API are listed in table 5.6.5.3-1.



Table 5.6.5.3-1: Application errors

Application Error	HTTP status code	Description	Applicability
QUOTA_EXCEEDED	403 Forbidden	Not enough quota for the MT NIDD	
DATA_TOO_LARGE	403 Forbidden	The non-IP data size is larger than "maximumPacketSize" of the NIDD configuration.	
RDS_PORT_UNKNOWN	403 Forbidden	The SCEF does not know the RDS port numbers in the MT NIDD, such port numbers does not match with the configured port numbers.	Rds_port_verification
OPERATION_PROHIBITED	403 Forbidden	Indicates the operation is prohibited.	
PORT_NOT_FREE	403 Forbidden	Port is not free as it is already associated with an application	Rds_dynamic_port
ALREADY_DELIVERED	404 Not Found	The SCEF has already delivered the buffered data.	
PORT_NOT_ASSOC_WITH_APP	404 Not Found	Port is free and is not associated with any application.	Rds_dynamic_port
SENDING	409 Conflict	The SCEF is already in sending the buffered non-IP data.	
TRIGGERED	500 Internal Server Error	The SCEF triggered the device but did not buffer the data. The SCS AS may resubmit the data	
TEMPORARILY_NOT_REACHABLE	500 Internal Server Error	The SCEF has aborted the delivery because the UE is temporarily not reachable. The SCEF may in addition indicate a requested re-submission time for the data.	
NEXT_HOP	500 Internal Server Error	Unsuccessful delivery to the next hop.	
TIMEOUT	500 Internal Server Error	Unsuccessful delivery due to timeout.	
NO_PDN_CONNECTION	500 Internal Server Error	The SCEF cannot proceed since there is no PDN connection.	
SERIALIZATION_FORMAT_NOT_SUPPORTED	500 Internal Server Error	The SCEF was not able to configure a Serialization Format for the port	Rds_serialization_format

## 5.7 DeviceTriggering API

### 5.7.1 Overview

The DeviceTriggering API is a RESTful API that allows the SCS/AS to deliver specific device trigger to the SCEF; it allows the SCS/AS to replace or recall the pending device trigger via the SCEF. If the corresponding device trigger delivery report is received by the SCEF, it also allows the SCEF to indicate the trigger delivery result to the SCS/AS.

The DeviceTriggering API defines a set of data models, resources and the related procedure for the creation and management of the device triggering. The corresponding JSON schema for the representation of the resources and operations defined by the DeviceTriggering API is provided in its complete form in Annex A.7.

### 5.7.2 Data model

#### 5.7.2.1 Resource data types

##### 5.7.2.1.1 Introduction

This clause defines data structures to be used in resource representations, including subscription resources.

Table 5.7.2.1.1-1 specifies data types re-used by the DeviceTriggering API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the DeviceTriggering API.

**Table 5.7.2.1.1-1: DeviceTriggering API re-used Data Types**

Data type	Reference	Comments
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.7.4-1.

Table 5.7.2.1.1-2 specifies the data types defined for the DeviceTriggering API.

**Table 5.7.2.1.1-2: DeviceTriggering API specific Data Types**

Data type	Clause defined	Description	Applicability
DeliveryResult	5.7.2.2.3	Represents the result of the delivery of a device triggering request.	
DeviceTriggering	5.7.2.1.2	Represents device triggering related information.	
DeviceTriggeringDeliveryReportNotification	5.7.2.1.3	Represents a device triggering delivery report notification.	
DeviceTriggeringPatch	5.7.2.1.4	Represents the parameters to request the modification of an Individual Device Triggering Transaction resource.	PatchUpdate
Priority	5.7.2.2.4	Represents the priority indication for a trigger payload.	

#### 5.7.2.1.2 Type: DeviceTriggering

This type represents device triggering request. The same structure is used in the request and response.

Table 5.7.2.1.2-1: Definition of type DeviceTriggering

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
self	Link	0..1	Link to the resource "Individual Device Triggering Transaction". This parameter shall be supplied by the SCEF in HTTP responses.	
externalId	ExternalId	0..1	Uniquely identifies a user as defined in Clause 4.6.2 of 3GPP TS 23.682 [2]. (NOTE 2)	
msisdn	Msisdn	0..1	Identifies the MS internal PSTN/ISDN number allocated for a UE. (NOTE 2)	
supportedFeatures	SupportedFeatures	0..1	Used to negotiate the supported optional features of the API as described in clause 5.2.7. This attribute shall be provided in the POST request and in the response of successful resource creation.	
validityPeriod	DurationSec	1	The validity time in seconds for the specific action requested.	
priority	Priority	1	Identifies the priority of the device trigger.	
applicationPortId	Port	1	This is used to uniquely identify the triggering application addressed in the device for destination port. See clause 9.2.3.24.4 in 3GPP TS 23.040 [43] for further details.	
appSrcPortId	Port	0..1	This is used to uniquely identify the triggering application addressed in the device for originator port. See clause 9.2.3.24.4 in 3GPP TS 23.040 [43] for further details.	
triggerPayload	Bytes	1	The device triggering payload.	
notificationDestination	Link	1	A URI indicating the notification destination for T8 notifications.	
requestTestNotification	boolean	0..1	Set to true by the SCS/AS to request the SCEF to send a test notification as defined in clause 5.2.5.3. Set to false or omitted otherwise.	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	0..1	Configuration parameters to set up notification delivery over Websocket protocol as defined in clause 5.2.5.4.	Notification_websocket
deliveryResult	DeliveryResult	0..1	The delivery result shall be included in the HTTP responses that indicate the delivery status of the device triggering.	
NOTE 1: Properties marked with a feature as defined in clause 5.7.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				
NOTE 2: One of the properties "externalId" or "msisdn" shall be included.				

### 5.7.2.1.3 Type: DeviceTriggeringDeliveryReportNotification

This type represents device triggering delivery report notification.

**Table 5.7.2.1.4-1: Definition of type DeviceTriggeringDeliveryReportNotification**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
transaction	Link	1	Link to the related device triggering transaction resource to which this notification is related.	
Result	DeliveryResult	1	OK, unknown or diverse failures	
NOTE: Properties marked with a feature as defined in clause 5.3.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

5.7.2.1.4 Type: DeviceTriggeringPatch

This type represents the parameters to request the modification of an Individual Device Triggering Transaction resource.

**Table 5.7.2.1.4-1: Definition of type DeviceTriggeringPatch**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
validityPeriod	DurationSec	1	The validity time in seconds for the specific action requested.	
priority	Priority	1	Identifies the priority of the device triggering request.	
applicationPortId	Port	1	This is used to uniquely identify the triggering application addressed in the device for the destination port. See clause 9.2.3.24.4 in 3GPP TS 23.040 [43] for further details.	
appSrcPortId	Port	0..1	This is used to uniquely identify the triggering application addressed in the device for the originator port. See clause 9.2.3.24.4 in 3GPP TS 23.040 [43] for further details.	
triggerPayload	Bytes	1	The modified device triggering payload.	
notificationDestination	Link	1	A URI indicating the notification destination for T8 notifications.	
NOTE 1: Properties marked with a feature as defined in clause 5.7.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

5.7.2.2 Referenced simple data types and enumerations

5.7.2.2.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses. In addition, data types and enumerations defined in clause 5.2.1 can be referenced.

5.7.2.2.2 Simple data types

The simple data types defined in table 5.7.2.2.2-1 shall be supported.

**Table 5.7.2.2.2-1: Simple data types**

Type name	Description

5.7.2.2.3 Enumeration: DeliveryResult

The enumeration DeliveryResult represents the result of the delivery of a device triggering request

**Table 5.7.2.2.3-1: Enumeration DeliveryResult**

Enumeration value	Description	Applicability (NOTE)
SUCCESS	The SCEF includes this value in a device triggering notification. The value indicates that the device action request was successfully completed.	
UNKNOWN	The SCEF includes this value in a device triggering notification. The value indicates any unspecified errors.	
FAILURE	The SCEF includes this value in a device triggering notification. The value indicates that this trigger encountered a delivery error and is deemed permanently undeliverable.	
TRIGGERED	The SCEF includes this value in the response for a successful device triggering request. The value indicates that device triggering request is accepted by the SCEF.	
EXPIRED	The SCEF includes this value in a device triggering notification. The value indicates that the validity period expired before the trigger could be delivered.	
UNCONFIRMED	The SCEF includes this value in a device triggering notification. The value indicates that the delivery of the device action request is not confirmed.	
REPLACED	The SCEF includes this value in the response for a successful device triggering replacement request. The value indicates that the device triggering replacement request is accepted by the SCEF.	
TERMINATE	The SCEF includes this value in the response for a successful device triggering cancellation request. The value indicates that the delivery of the device action request is terminated by the SCS/AS.	
NOTE:	Properties marked with a feature as defined in clause 5.7.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.	

#### 5.7.2.2.4 Enumeration: Priority

The enumeration Priority represents the priority indication for a trigger payload.

**Table 5.7.2.2.4-1: Enumeration Priority**

Enumeration value	Description	Applicability (NOTE)
NO_PRIORITY	This value indicates that the device trigger has no priority.	
PRIORITY	This value indicates that the device trigger has priority.	
NOTE:	Properties marked with a feature as defined in clause 5.7.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.	

### 5.7.3 Resource structure

#### 5.7.3.1 General

All resource URIs of this API should have the following root:

**{apiRoot}/3gpp-device-triggering/v1**

"apiRoot" is set as described in clause 5.2.4. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:

Table 5.7.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	HTTP initiator	Meaning
Device Triggering Transactions	/{scsAsId}/transactions	GET	SCS/AS	Read all active device triggering transaction resources for a given SCS/AS
		POST	SCS/AS	Create a new device triggering transaction resource
Individual Device Triggering Transaction	/{scsAsId}/transactions/{transactionId}	PUT	SCS/AS	Replace an existing Individual Device Triggering Transaction resource and the corresponding device triggering request
		PATCH	SCS/AS	Modify an existing Individual Device Triggering Transaction resource and the corresponding device triggering request.
		GET	SCS/AS	Read a device triggering transaction resource
		DELETE	SCS/AS	Delete an existing device triggering transaction resource and cancel the device triggering

## 5.7.3.2 Resource: Device Triggering Transactions

### 5.7.3.2.1 Introduction

This resource allows the SCS/AS to read all active resources related to device triggering, and create a resource for a device triggering transaction with the SCEF.

### 5.7.3.2.2 Resource definition

Resource URI: {apiRoot}/3gpp-device-triggering/v1/{scsAsId}/transactions

This resource shall support the resource URI variables defined in table 5.7.3.2.2-1.

Table 5.7.3.2.2-1: Resource URI variables for resource "Device Triggering Transactions"

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.

### 5.7.3.2.3 Resource methods

#### 5.7.3.2.3.1 GET

The GET method allows to read all active device triggering transactions for a given SCS/AS. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in table 5.7.3.2.3.1-1 and table 5.7.3.2.3.1-2.

**Table 5.7.3.2.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.7.3.2.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
none				
Response body	Data type	Cardinality	Response codes	Remarks
	array(DeviceTriggering)	0..N	200 OK	The device triggering transactions information for the SCS/AS in the request URI are returned.
	none		307 Temporary Redirect	Temporary redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.7.3.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.7.3.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.7.3.2.3.2 PUT

This HTTP method is not supported for the resource.

#### 5.7.3.2.3.3 PATCH

This HTTP method is not supported for the resource.

#### 5.7.3.2.3.4 POST

To create a long-term transaction for a device triggering, the SCS/AS shall use the HTTP POST method on the "transactions" collection resource as follows:

- the body of the message is encoded in JSON format with the data structure defined in table 5.7.2.1.2-1.

The possible response messages from the SCEF, depending on whether the POST request is successful or unsuccessful, are shown in Table 5.7.3.2.3.4-1.

**Table 5.7.3.2.3.4-1: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	DeviceTriggering		1	Parameters to request a device triggering delivery.
Response body	Data type	Cardinality	Response codes	Remarks
	DeviceTriggering	1	201 Created	<p>The long term transaction for the device triggering was created successfully.</p> <p>The SCEF shall return a data structure of type "DeviceTriggering" in the response content.</p> <p>The URI of the created resource shall be returned in the "Location" HTTP header</p>

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.7.3.2.3.4-2: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-device-triggering/v1/{scsAsId}/transactions/{transactionId}

#### 5.7.3.2.3.5 DELETE

This HTTP method is not supported for the resource.

### 5.7.3.3 Resource: Individual Device Triggering Transaction

#### 5.7.3.3.1 Introduction

This resource allows the SCS/AS to operate a specific pending device triggering by using a long-term transaction.

#### 5.7.3.3.2 Resource definition

Resource URI: {apiRoot}/3gpp-device-triggering/v1/{scsAsId}/transactions/{transactionId}

This resource shall support the resource URI variables defined in table 5.7.3.3.2-1.

**Table 5.7.3.3.2-1: Resource URI variables for resource "Individual Device Triggering Transaction"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
transactionId	string	Identifier of the transaction resource. The transactionId corresponds to the stage 2 TLTRI.

#### 5.7.3.3.3 Resource methods

##### 5.7.3.3.3.1 GET

The GET method allows to read an individual device triggering transaction resource to obtain details of an active transaction. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.7.3.3.3.1-1 and table 5.7.3.3.3.1-2.



**Table 5.7.3.3.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.7.3.3.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	DeviceTriggering	1	200 OK	The device triggering transaction information related to the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.7.3.3.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.7.3.3.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.7.3.3.3.2 PUT

A pending device triggering delivery can be replaced by the SCS/AS. To replace the pending device triggering, the SCS/AS shall use the HTTP PUT method on the "transaction" instance resource as follows with the body of the message encoded in JSON format including the data structure defined in table 5.7.2.1.2-1

The properties "msisdn" or "externalId" shall remain unchanged from previously provided value.

The possible response messages from the SCEF, depending on whether the PUT request is successful or unsuccessful, are shown in Table 5.7.3.3.3.2-1.

**Table 5.7.3.3.3.2-1: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	DeviceTriggering	1	Parameters to replace a device triggering with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	DeviceTriggering	1	200 OK	The device triggering was replaced successfully. The SCEF shall return an updated representation of the resource within the DeviceTriggering data structure including the "deliveryResult" attribute in the response message body.
	none		204 No Content	The device triggering was updated successfully.
	none		307 Temporary Redirect	Temporary redirection, during transaction modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				

**Table 5.7.3.3.3.2-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.7.3.3.3.2-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.7.3.3.3.3 PATCH

A pending device triggering delivery can be modified by the SCS/AS. If the "PatchUpdate" feature defined in clause 5.7.4 is supported, to partially modify a pending device triggering, delivery, the SCS/AS shall use the HTTP PATCH method on the concerned Individual Device Triggering Transaction resource as follows with the body of the message is encoded in JSON format including the data structure defined in table 5.7.2.1.4-1

The possible response messages from the SCEF, depending on whether the PATCH request is successful or unsuccessful, are shown in Table 5.7.3.3.3.3-1.

**Table 5.7.3.3.3-1: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	DeviceTriggeringPatch	1	Parameters to request the modification of a pending device triggering delivery.	
Response body	Data type	Cardinality	Response codes	Remarks
	DeviceTriggering	1	200 OK	The Individual Device Triggering Transaction resource was successfully modified and a representation of the modified Individual Device Triggering Transaction resource within the DeviceTriggering data structure including the "deliveryResult" attribute is returned by the SCEF in the response message body.
	n/a		204 No Content	The Individual Device Triggering Transaction resource was successfully modified no content is to be sent in the response message body.
	n/a		307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	n/a		308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 also apply.				

**Table 5.7.3.3.3-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.7.3.3.3-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.7.3.3.3.4 POST

This HTTP method is not supported for the resource.

#### 5.7.3.3.3.5 DELETE

To cancel an ongoing device triggering delivery, the SCS/AS shall use the HTTP DELETE method on the individual "transaction" resource which is indicated by the URI in the Location header of the HTTP POST response:

The possible response messages from the SCEF, depending on whether the DELETE request is successful or unsuccessful, are shown in Table 5.7.3.3.3-1.

**Table 5.7.3.3.3.5-1: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none		.	
Response body	Data type	Cardinality	Response codes	Remarks
	DeviceTriggering	1	200 OK	The Device Triggering delivery was cancelled successfully. The SCEF shall return a data structure of type "DeviceTriggering" with a "TERMINATE" status in the response body.
	None		204 No Content	The Device Triggering was cancelled successfully. The SCEF shall not return a response content.
	none		307 Temporary Redirect	Temporary redirection, during transaction termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during transaction termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				

**Table 5.7.3.3.3.5-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.7.3.3.3.5-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.7.3.4 Void

5.7.3A Notifications

5.7.3A.1 General

The notifications provided by the DeviceTriggering API are specified in this clause.

**Table 5.7.3A-1: Notifications overview**

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Device Triggering Delivery Report Notification	{notification_uri}	POST	Report a device triggering delivery report to SCS/AS.

## 5.7.3A.2 Device Triggering Delivery Report Notification

### 5.7.3A.2.1 Description

The Device Triggering Delivery Report Notification allows the SCEF to send notifications about device triggering delivery report events to the SCS/AS.

### 5.7.3A.2.2 Target URI

The Callback URI "{notification\_uri}" shall be used with the callback URI variables defined in table 5.7.3A.2.2-1.

**Table 5.7.3A.2.2-1: Callback URI variables**

Name	Data type	Definition
notification_uri	Link	A URI indicating the notification destination URI where T8 notification requests shall be delivered. This URI shall be provided within the "notificationDestination" attribute in the DeviceTriggering type.

### 5.7.3A.2.3 Standard Methods

#### 5.7.3A.2.3.1 Notification via POST

To report the delivery status of the device triggering delivery, the SCEF shall use the HTTP POST method on the notification endpoint as follows:

- the body of the message is encoded in JSON format with the data structure defined in table 5.7.2.1.4-1.

This method shall support the request data structures specified in table 5.7.3A.2.3.1-1 and the response data structures and response codes specified in table 5.7.3A.2.3.1-2.

**Table 5.7.3A.2.3.1-1: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
DeviceTriggeringDeliveryReportNotification	1	The Device Triggering delivery report.

**Table 5.7.3A.2.3.1-2: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
Acknowledgement	1	200 OK	The successful acknowledgement of the notification.
(None)		204 No Content	The successful acknowledgement of the notification without a body.
none		307 Temporary Redirect	Temporary redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.7.3A.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.7.3A.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

#### 5.7.3a.2.3.2 Notification via Websocket

If supported by both SCS/AS and SCEF and successfully negotiated, the DeviceTriggeringDeliveryReportNotification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4.

### 5.7.4 Used Features

The table below defines the features applicable to the DeviceTriggering API. Those features are negotiated as described in clause 5.2.7.

**Table 5.7.4-1: Features used by DeviceTriggering API**

Feature Number	Feature	Description
1	Notification_websocket	The delivery of notifications over Websocket is supported according to clause 5.2.5.4. This feature requires that the Notification_test_event feature is also supported.
2	Notification_test_event	The testing of notification connection is supported according to clause 5.2.5.3.
3	PatchUpdate	Indicates the support of enhancements to the northbound interfaces (e.g. support the partial modification of an existing subscription resource).
Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".		
Description: A clear textual description of the feature.		

### 5.7.5 Error handling

#### 5.7.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

#### 5.7.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the DeviceTriggering API.

#### 5.7.5.3 Application Errors

The application errors defined for DeviceTriggering API are listed in table 5.7.5.3-1.

**Table 5.7.5.3-1: Application errors**

Application Error	HTTP status code	Description	Applicability

## 5.8 GMD via MBMS related APIs

### 5.8.1 Overview

There are two Group Message Delivery via MBMS related APIs defined:

- GMDviaMBMSbyMB2 API;
- GMDviaMBMSbyxMB API.

Both APIs are RESTful APIs that allow the SCS/AS to deliver the group message to the SCEF. They define a set of data models, resources and the related procedures for the creation and management of the group message delivery. The corresponding JSON schema for the representation of the resources and operations defined by the GMDviaMBMSbyMB2 API and GMDviaMBMSbyxMB API are provided in its complete form in Annex A.8.1 and Annex A.8.2, respectively.

### 5.8.2 GMDviaMBMSbyMB2 API

#### 5.8.2.1 Data model

##### 5.8.2.1.1 Resource data types

###### 5.8.2.1.1.1 Introduction

This clause defines data structures to be used in resource representations.

Table 5.8.2.1.1.1-1 specifies data types re-used by the GMDviaMBMSbyMB2 API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the GMDviaMBMSbyMB2 API.

**Table 5.8.2.1.1.1-1: GMDviaMBMSbyMB2 API re-used Data Types**

Data type	Reference	Comments
GeographicArea	3GPP TS 29.572 [42]	Identifies the geographical information of the user(s).
CivicAddress	3GPP TS 29.572 [42]	Identifies the civic address information of the user(s).
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.8.2.3-1.

Table 5.8.2.1.1.1-2 specifies the data types defined for the GMDviaMBMSbyMB2 API.

**Table 5.8.2.1.1.1-2: GMDviaMBMSbyMB2 API specific Data Types**

Data type	Clause defined	Description	Applicability
GMDByMb2Notification	5.8.2.1.1.4	Represents a group message delivery notification.	
GMDViaMBMSByMb2	5.8.2.1.1.3	Represents a group message delivery via MBMS by MB2.	
GMDViaMBMSByMb2Patch	5.8.2.1.1.6	Represents a modification request of a group message delivery via MBMS by MB2.	
MbmsLocArea	5.8.2.1.1.7	Represents a user location area within which is sent a group message delivery via MBMS request.	
TMGIAllocation	5.8.2.1.1.2	Represents an individual TMGI Allocation resource.	
TMGIAllocationPatch	5.8.2.1.1.5	Represents the parameters to request the modification of a TMGI Allocation resource.	

###### 5.8.2.1.1.2 Type: TMGIAllocation

This type represents TMGI Allocation request. The same structure is used in the request and response.

Table 5.8.2.1.1.2-1: Definition of type TMGIAAllocation

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
self	Link	0..1	Link to the resource "Individual TMGI Allocation". This parameter shall be supplied by the SCEF in HTTP responses.	
supportedFeatures	SupportedFeatures	0..1	Used to negotiate the supported optional features of the API as described in clause 5.2.7. This attribute shall be provided in the POST request and in the response of successful resource creation.	
externalGroupId	ExternalGroupId	0..1	Identifies a user group as defined in clause 4.6.2 of 3GPP TS 23.682 [2].	
mbmsLocArea	MbmsLocArea	0..1	Represents the location area within which the group message delivery via MBMS is allowed.	
tmgiExpiration	DateTimeRo	0..1	Identifies the absolute time at which the TMGI is considered to expire.	
NOTE: Properties marked with a feature as defined in clause 5.8.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

## 5.8.2.1.1.3 Type: GMDViaMBMSByMb2

This type represents the group message delivery via MBMS by MB2.

Table 5.8.2.1.1.3-1: Definition of type GMDViaMBMSByMb2

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
self	Link	0..1	Link to the resource "Individual GMD via MBMS by MB". This parameter shall be supplied by the SCEF in HTTP responses.	
notificationDestination	Link	1	A URI indicating the notification destination where T8 notification requests shall be delivered	
requestTestNotification	boolean	0..1	Set to true by the SCS/AS to request the SCEF to send a test notification as defined in clause 5.2.5.3. Set to false or omitted otherwise.	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	0..1	Configuration parameters to set up notification delivery over Websocket protocol as defined in clause 5.2.5.4.	Notification_websocket
externalGroupId	ExternalGroupId	0..1	Identifies a user group as defined in clause 4.6.2 of 3GPP TS 23.682 [2].	
mbmsLocArea	MbmsLocArea	0..1	Represents the location area within which the group message delivery via MBMS is allowed.	
messageDeliveryStartTime	DateTime	0..1	Identifies the absolute time at which the SCS/As starts to distribute the data. If absent, it indicates the message shall be sent immediately.	
groupMessagePayload	Bytes	0..1	Indicates the payload the SCS/AS intends to deliver to the UEs.	
scefMessageDeliveryIpv4	Ipv4AddrRo	0..1	Indicates the Ipv4 address where the SCEF wants to receive the data.	
scefMessageDeliveryIpv6	Ipv6AddrRo	0..1	Indicates the Ipv6 address where the SCEF wants to receive the data.	
scefMessageDeliveryPort	PortRo	0..1	Indicates the port number where the SCEF wants to receive the data.	
NOTE: Properties marked with a feature as defined in clause 5.8.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				



## 5.8.2.1.1.4 Type: GMDByMb2Notification

This type represents the group message delivery notification.

**Table 5.8.2.1.1.4-1: Definition of type GMDByMb2Notification**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
transaction	Link	1	Link to the transaction resource to which this notification is related.	
deliveryTriggerStatus	boolean	1	Indicates whether delivery of group message payload corresponding to the TMGI was successful (TRUE) or not (FALSE).	
NOTE: Properties marked with a feature as defined in clause 5.8.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

## 5.8.2.1.1.5 Type: TMGIAAllocationPatch

This type represents TMGI Allocation request. The structure is used for PATCH request.

**Table 5.8.2.1.1.5-1: Definition of type TMGIAAllocationPatch**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
externalGroupId	ExternalGroupId	0..1	Identifies a user group as defined in clause 4.6.2 of 3GPP TS 23.682 [2].	
mbmsLocArea	MbmsLocArea	0..1	Represents the location area within which the group message delivery via MBMS is allowed.	
NOTE: Properties marked with a feature as defined in clause 5.8.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

## 5.8.2.1.1.6 Type: GMDViaMBMSByMb2Patch

This type represents group message delivery via MBMS request by MB2. The structure is used for PATCH request.

**Table 5.8.2.1.1.6-1: Definition of the GMDViaMBMSByMb2Patch data type**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
externalGroupId	ExternalGroupId	0..1	Identifies a user group as defined in clause 4.6.2 of 3GPP TS 23.682 [2].	
mbmsLocArea	MbmsLocArea	0..1	Represents the location area within which the group message delivery via MBMS is allowed.	
messageDeliveryStartTime	DateTime	0..1	Identifies the absolute time at which the SCS/As starts to distribute the data. If absent, it indicates the message shall be sent immediately.	
groupMessagePayload	Bytes	0..1	Indicates the payload the SCS/AS intends to deliver to the UEs.	
notificationDestination	Link	0..1	A URI indicating the notification destination where the notification requests shall be delivered.	
NOTE: Properties marked with a feature as defined in clause 5.8.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

## 5.8.2.1.1.7 Type: MbmsLocArea

This data type represents the user location area which is sent from the SCS/AS to the SCEF by group message delivery via MBMS request.

**Table 5.8.2.1.1.7-1: Definition of the MbmsLocArea data type**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
cellId	array(string)	0..N	Indicates a Cell Global Identification of the user which identifies the cell the UE is registered.	
enodeBId	array(string)	0..N	Indicates an eNodeB in which the UE is currently located.	
geographicArea	array(Geographic Area)	0..N	Identifies a geographic area of the user where the UE is located.	
mbmsServiceAreaId	array(string)	0..N	Identifies an MBMS Service Area Identity of the user where the UE is located.	
civicAddress	array(CivicAddress)	0..N	Identifies a civic address of the user where the UE is located.	
NOTE: Properties marked with a feature as defined in clause 5.8.2.3 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				

## 5.8.2.2 Resource structure

## 5.8.2.2.1 General

All resource URIs of this API should have the following root:

**{apiRoot}/3gpp-group-message-delivery-mb2/v1**

"apiRoot" is set as described in clause 5.2.4. "apiName" shall be set to "3gpp-group-message-delivery-mb2" and "apiVersion" shall be set to "v1" for the version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:

Table 5.8.2.2.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	HTTP initiator	Meaning
TMGI Allocation	/{scsAsId} /tmgi-allocation	GET	SCS/AS	Read all active TMGI resources for a given SCS/AS
		POST	SCS/AS	Create a new TMGI resource for a given SCS/AS
Individual TMGI Allocation	/{scsAsId} /tmgi-allocation/{tmgi}	PUT	SCS/AS	Replace an existing TMGI resource for a given SCS/AS and TMGI
		PATCH	SCS/AS	Modify an existing TMGI resource for a given SCS/AS and TMGI
		GET	SCS/AS	Read a TMGI allocation resource for a given SCS/AS and a TMGI
		DELETE	SCS/AS	Deallocate an existing TMGI resource for a given SCS/AS and TMGI
GMD via MBMS by MB2	/{scsAsId} /tmgi-allocation/{tmgi}/delivery-via-mbms	GET	SCS/AS	Read all group message delivery resources for a given SCS/AS and TMGI.
		POST	SCS/AS	Create a group message delivery resource for given SCS/AS and TMGI selected by the SCS/AS when MB2 is used as a southbound interface.
Individual GMD via MBMS by MB2	/{scsAsId} /tmgi-allocation/{tmgi}/delivery-via-mbms/ {transactionId}	PUT	SCS/AS	Replace a group message delivery resource
		PATCH	SCS/AS	Modify a group message delivery resource.
		GET	SCS/AS	Read a group message delivery resource.
		DELETE	SCS/AS	Delete a group message delivery resource.

### 5.8.2.2.2 Resource: TMGI Allocation

#### 5.8.2.2.2.1 Introduction

This resource allows the SCS/AS to read all active TMGI or request a TMGI allocation.

#### 5.8.2.2.2.2 Resource definition

Resource URI: **{apiRoot}/3gpp-group-message-delivery-mb2/v1/{scsAsId}/tmgi-allocation**

This resource shall support the resource URI variables defined in table 5.8.2.2.2.2-1.

Table 5.8.2.2.2-1: Resource URI variables for resource "TMGI Allocation"

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.

#### 5.8.2.2.2.3 Resource methods

##### 5.8.2.2.2.3.1 GET

The GET method read all TMGI Allocation resource for a given SCS/AS. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.2.2.2.3.1-1.

**Table 5.8.2.2.2.3.1-1: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	array(TMGIAllocation)	0..N	200 OK	The TMGI allocation for the SCS/AS in the request URI are returned.
	none		307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.8.2.2.2.3.1-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.2.2.2.3.1-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.8.2.2.2.3.2 PUT

This HTTP method is not supported for the resource.

#### 5.8.2.2.2.3.3 PATCH

This HTTP method is not supported for the resource.

#### 5.8.2.2.2.3.4 POST

The POST method creates a new TMGI Allocation resource for a given SCS/AS. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.2.2.2.3.4-1.

**Table 5.8.2.2.3.4-1: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	TMGIAllocation	1	Parameters to create a TMGI allocation resource	
Response body	Data type	Cardinality	Response codes	Remarks
	TMGIAllocation	1	201 Created	<p>The creation of a TMGI allocation was created successfully.</p> <p>The SCEF shall return a data structure of type "TMGI Allocation" in the response content.</p> <p>On success, the HTTP response shall include a "Location" HTTP header that points to the created resource URI identified by the ScsAsId and the TMGI</p>

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.8.2.2.3.4-2: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-group-message-delivery-mb2/v1/{scsAsId}/tmgi-allocation/{tmgi}

#### 5.8.2.2.3.5 DELETE

This HTTP method is not supported for the resource.

### 5.8.2.2.3 Resource: Individual TMGI Allocation

#### 5.8.2.2.3.1 Introduction

This resource allows the SCS/AS to read an active TMGI or renew an TMGI.

#### 5.8.2.2.3.2 Resource definition

Resource URI: {apiRoot}/3gpp-group-message-delivery-mb2/v1/{scsAsId}/tmgi-allocation/{tmgi}

This resource shall support the resource URI variables defined in table 5.8.2.2.3.2-1.

**Table 5.8.2.2.3.2-1: Resource URI variables for resource "Individual TMGI Allocation"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
Tmgi	string	TMGI.

#### 5.8.2.2.3.3 Resource methods

##### 5.8.2.2.3.3.1 GET

The GET method reads a TMGI Allocation resource for a given SCS/AS. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.2.2.3.3.1-1.

**Table 5.8.2.2.3.3.1-1: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	TMGIAllocation	1	200 OK	A TMGI allocation for the SCS/AS in the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.8.2.2.3.3.1-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.2.2.3.3.1-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.8.2.2.3.3.2 PUT

The PUT method replaces a TMGI Allocation resource for a given SCS/AS to renew a TMGI expiration time. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.2.2.3.3.2-1.

**Table 5.8.2.2.3.3.2-1: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	TMGIAllocation	1	Parameters to replace a TMGI resource	
Response body	Data type	Cardinality	Response codes	Remarks
	TMGIAllocation	1	200 OK	The replace of a TMGI allocation was created successfully.
	none		204 No Content	The TMGI expiration time renewal is successful, and no content is to be sent in the response message body.
	none		307 Temporary Redirect	Temporary redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				

**Table 5.8.2.2.3.3.2-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.2.2.3.3.2-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

### 5.8.2.2.3.3.3 PATCH

The PATCH method modifies a TMGI Allocation resource for a given SCS/AS to renew a TMGI expiration time. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.2.2.3.3.3-1.

**Table 5.8.2.2.3.3.3-1: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	TMGIAllocationPatch	1	Parameters to modify a TMGI resource	
Response body	Data type	Cardinality	Response codes	Remarks
	TMGIAllocation	1	200 OK	The modification of a TMGI allocation was created successfully.
	none		204 No Content	The TMGI expiration time renewal is successful, and no content is to be sent in the response message body.
	none		307 Temporary Redirect	Temporary redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 also apply.				

**Table 5.8.2.2.3.3.3-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.2.2.3.3.3-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.8.2.2.3.3.4 POST

This HTTP method is not supported for the resource.

#### 5.8.2.2.3.3.5 DELETE

The DELETE method deletes a TMGI Allocation resource for a given SCS/AS to deallocate a TMGI. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.2.2.3.3.5-1.



**Table 5.8.2.2.3.3.5-1: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The TMGI allocation resource was removed successfully.
	none		307 Temporary Redirect	Temporary redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				

**Table 5.8.2.2.3.3.5-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.2.2.3.3.5-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.8.2.2.4 Resource: GMD via MBMS by MB2

##### 5.8.2.2.4.1 Introduction

This resource allows the SCS/AS to read all active group message delivery resources or create a group message delivery when the MB2 is used as a southbound interface.

##### 5.8.2.2.4.2 Resource definition

Resource URI: **{apiRoot}/3gpp-group-message-delivery-mb2/v1/{scsAsId}/tmgi-allocation/{tmgi}/delivery-via-mbms**

This resource shall support the resource URI variables defined in table 5.8.2.2.4.2-1.

**Table 5.8.2.2.4.2-1: Resource URI variables for resource "GMD via MBMS by MB2"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
Tmgi	string	TMGI

## 5.8.2.2.4.3 Resource methods

## 5.8.2.2.4.3.1 GET

The GET method reads all group message delivery via MBMS resources for a given SCS/AS and a TMGI. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.2.2.4.3.1-1.

**Table 5.8.2.2.4.3.1-1: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	array(GMDViaMBMSBy Mb2)	0..N	200 OK	The TMGI allocation for the SCS/AS in the request URI are returned.
	none		307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.8.2.2.4.3.1-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.2.2.4.3.1-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.8.2.2.4.3.2 PUT

This HTTP method is not supported for the resource.

## 5.8.2.2.4.3.3 PATCH

This HTTP method is not supported for the resource.

## 5.8.2.2.4.3.4 POST

The POST method creates a new group message delivery via MBMS resource for a given SCS/AS and TMGI selected by the SCS/AS. It is initiated by the SCS/AS and answered by the SCEF. The SCEF shall construct the URI of the created resource using that URI.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.2.2.4.3.4-1.

**Table 5.8.2.2.4.3.4-1: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	GMDViaMBMSByMb2	1	Parameters to create and authorize a group message delivery via MBMS with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	GMDViaMBMSByMb2	1	201 Created	<p>The creation of a group message delivery was created successfully.</p> <p>The SCEF shall return a data structure of type "GMDViaMBMSByMb2" in the response content.</p> <p>On success, the HTTP response shall include a "Location" HTTP header that points to the created resource URI identified by the ScsAsId and the Transaction Id.</p>

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.8.2.2.4.3.4-2: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-group-message-delivery-mb2/v1/{scsAsId}/tmgi-allocation/{tmgi}/delivery-via-mbms/{transactionId}

#### 5.8.2.2.4.3.5 DELETE

This HTTP method is not supported for the resource.

#### 5.8.2.2.5 Resource: Individual GMD via MBMS by MB2

##### 5.8.2.2.5.1 Introduction

This resource allows the SCS/AS to modify or delete a group message delivery via MBMS by MB2 resource.

##### 5.8.2.2.5.2 Resource definition

Resource URI: {apiRoot}/3gpp-group-message-delivery-mb2/v1/{scsAsId}/tmgi-allocation/{tmgi}/delivery-via-mbms/{transactionId}

This resource shall support the resource URI variables defined in table 5.8.2.2.5.2-1.

**Table 5.8.2.2.5.2-1: Resource URI variables for resource "Individual GMD via MBMS by MB2"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
transactionId	string	TransactionId selected by the SCEF. The transactionId corresponds to the stage 2 TLTRI.

##### 5.8.2.2.5.3 Resource methods

###### 5.8.2.2.5.3.1 GET

The GET method reads a group message delivery via MBMS by MB2 resource for a given SCS/AS, a TMGI and a transactionId. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.2.2.5.3.1-1.

**Table 5.8.2.2.5.3.1-1: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	GMDViaMBMSbyMb2	0..1	200 OK	The group message delivery resource for the SCS/AS in the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.8.2.2.5.3.1-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.2.2.5.3.1-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.8.2.2.5.3.2 PUT

Assuming that a group message delivery has been created using the HTTP POST method described in clause 5.8.2.2.4.3.4, replace of its properties can be performed by the SCS/AS by using the HTTP PUT method on the "delivery\_via\_mbms" instance resource as follows:

- the body of the message is encoded in JSON format with the data structure defined in table 5.8.2.2.5.3.2-1.

The content body of the group message delivery via MBMS update request shall contain updated full representation of the group message delivery resource. Only the properties "locationinfo", "accuracy", "messageDeliverystarttime" and "groupMessagepayload" can be modified.

The possible response messages from the SCEF, depending on whether the PUT request is successful or unsuccessful, are shown in table 5.8.2.2.5.3.2-1.

**Table 5.8.2.2.5.3.2-1: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	GMDViaMBMSByMb2	1	Parameters to replace group message delivery resource with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	GMDViaMBMSByMb2	1	200 OK	The group message delivery was modified successfully. The SCEF shall return an updated data structure of type "GMDViaMBMSByMb2" in the response content.
	none		204 No Content	The group message delivery is replaced successfully, and no content is to be sent in the response message body.
	none		307 Temporary Redirect	Temporary redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				

**Table 5.8.2.2.5.3.2-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.2.2.5.3.2-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

### 5.8.2.2.5.3.3 PATCH

Assuming that a group message delivery has been created using the HTTP POST method described in clause 5.8.2.2.4.3.4, partial updating of its properties can be performed by the SCS/AS by using the HTTP PATCH method on the "delivery-via-mbms" instance resource.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.2.2.5.3.3-1.

**Table 5.8.2.2.5.3.3-1: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	GMDViaMBMSByMb2Patch		1	Parameters to partially update a group message delivery with the SCEF.
Response body	Data type	Cardinality	Response codes	Remarks
	GMDViaMBMSByMb2	1	200 OK	The group message delivery was modified successfully. The SCEF shall return an updated data structure of type "GMDViaMBMSByMb2" in the response content.
	none		204 No Content	The group message delivery is modified successfully, and no content is to be sent in the response message body.
	none		307 Temporary Redirect	Temporary redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 also apply.				

**Table 5.8.2.2.5.3.3-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.2.2.5.3.3-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.8.2.2.5.3.4 POST

This HTTP method is not supported for the resource.

#### 5.8.2.2.5.3.5 DELETE

To cancel a group message delivery, the SCS/AS shall use the HTTP DELETE method on the individual "delivery\_via\_mbms" resource which is indicated by the URI in the Location header of the HTTP POST response:

The possible response messages from the SCEF, depending on whether the DELETE request is successful or unsuccessful, are shown in table 5.8.2.2.5.3.5-1.

**Table 5.8.2.2.5.3.5-1.: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The group message delivery subscription was cancelled successfully.
	none		307 Temporary Redirect	Temporary redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				

**Table 5.8.2.2.5.3.5-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.2.2.5.3.5-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.8.2.2.6 Void

5.8.2.2A Notifications

5.8.2.2A.1 General

The notifications provided by the GMDviaMBMSbyMB2 API are specified in this clause.

**Table 5.8.2.2A.1-1: Notifications overview**

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
GMD via MBMS by MB2 Notification	{notificationDestination}	POST	Report a specific group message delivery result to the SCS/AS for a given transaction Id selected by the SCEF.

## 5.8.2.2A.2 GMD via MBMS by MB2 Notification

## 5.8.2.2A.2.1 Description

The GMD via MBMS by MB2 Notification allows the SCEF report the delivery trigger status to the SCS/AS to indicate whether group message delivery was triggered successful.

## 5.8.2.2A.2.2 Target URI

The Callback URI "{notificationDestination}" shall be used with the callback URI variables defined in table 5.8.2.2A.2.2-1.

**Table 5.8.2.2A.2.2-1: Callback URI variables**

Name	Data type	Definition
notificationDestination	Link	A URI indicating the notification destination where T8 notification requests shall be delivered. This URI shall be provided within the field "notificationDestination" in the GMDViaMBMSByMb2 type.

## 5.8.2.2A.2.3 Standard Methods

## 5.8.2.2A.2.3.1 Notification via POST

To report the status of the delivery trigger status to the SCS/AS, the SCEF shall use the HTTP POST method on the notification point as follows:

- the body of the message is encoded in JSON format with the data structure defined in table 5.8.2.1.1.4-1.

This method shall support the request data structures specified in table 5.8.2.2A.2.3.1-1 and the response data structures and response codes specified in table 5.8.2.2A.2.3.1-2.

**Table 5.8.2.2A.2.3.1-1: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
GMDByMb2Notification	1	The delivery status notification.

**Table 5.8.2.2A.2.3.1-2: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
Acknowledgement	1	200 OK	The successful acknowledgement of the notification with a body.
(None)		204 No Content	The successful acknowledgement of the notification without a body.
none		307 Temporary Redirect	Temporary redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.			



**Table 5.8.2.2A.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.8.2.2A.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

### 5.8.2.2A.2.3.2 Notification via Websocket

If supported by both SCS/AS and SCEF and successfully negotiated, the GMDByMb2Notification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4.

## 5.8.2.3 Used Features

The table below defines the features applicable to the GMDviaMBMSbyMB2 API. Those features are negotiated as described in clause 5.2.7.

**Table 5.8.2.3-1: Features used by GMDviaMBMSbyMB2 API**

Feature Number	Feature	Description
1	Notification_websocket	The delivery of notifications over Websocket is supported according to clause 5.2.5.4. This feature requires that the Notification_test_event feature is also supported.
2	Notification_test_event	The testing of notification connection is supported according to clause 5.2.5.3.
Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".		
Description: A clear textual description of the feature.		

## 5.8.2.4 Error handling

### 5.8.2.4.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

### 5.8.2.4.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the GMDviaMBMSbyMB2 API.

### 5.8.2.4.3 Application Errors

The application errors defined for GMDviaMBMSbyMB2 API are listed in table 5.8.2.4.3-1.

**Table 5.8.2.4.3-1: Application errors**

Application Error	HTTP status code	Description	Applicability

## 5.8.3 GMDviaMBMSbyxMB API

### 5.8.3.1 Data model

#### 5.8.3.1.1 Resource data types

##### 5.8.3.1.1.1 Introduction

This clause defines data structures to be used in resource representations.

Table 5.8.3.1.1.1-1 specifies data types re-used by the GMDviaMBMSbyxMB API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the GMDviaMBMSbyxMB API.

**Table 5.8.3.1.1.1-1: GMDviaMBMSbyxMB API re-used Data Types**

Data type	Reference	Comments
GeographicArea	3GPP TS 29.572 [42]	Identifies the geographical information of the user(s).
CivicAddress	3GPP TS 29.572 [42]	Identifies the civic address information of the user(s).
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.8.3.3-1.

Table 5.8.3.1.1.1-2 specifies the data types defined for the GMDviaMBMSbyxMB API.

**Table 5.8.3.1.1.1-2: GMDviaMBMSbyxMB API specific Data Types**

Data type	Clause defined	Description	Applicability
GMDByxMBNotification	5.8.3.1.1.4	Represents a group message delivery notification.	
GMDViaMBMSByxMB	5.8.3.1.1.3	Represents a group message delivery via MBMS by xMB.	
GMDViaMBMSByxMBPatch	5.8.3.1.1.5	Represents a modification request of a group message delivery via MBMS by xMB.	
MbmsLocArea	5.8.3.1.1.6	Represents a user location area within which is sent a group message delivery via MBMS request.	
ServiceAnnouncementMode	5.8.3.1.2.3	Represents the service announcement mode.	
ServiceCreation	5.8.3.1.1.2	Represents an individual xMB Service resource.	

##### 5.8.3.1.1.2 Type: ServiceCreation

This type represents the service resource.

Table 5.8.3.1.1.2-1: Definition of the ServiceCreation data type

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
self	Link	0..1	Link to the resource "Individual xMB Service". This parameter shall be supplied by the SCEF in HTTP responses.	
supportedFeatures	SupportedFeatures	0..1	Used to negotiate the supported optional features of the API as described in clause 5.2.7. This attribute shall be provided in the POST request and in the response of successful resource creation.	
externalGroupId	ExternalGroupId	0..1	Identifies a user group as defined in clause 4.6.2 of 3GPP TS 23.682 [2] supplied by the SCS/AS.	
userServiceId	string	0..1	Identifies the MBMS User Service supplied by the SCEF.	
serviceClass	string	0..1	The service class that service belongs to supplied by the SCEF.	
serviceLanguages	array(string)	0..N	List of language of the service content supplied by the SCEF.	
serviceNames	array(string)	0..N	List of Service Names supplied by the SCEF	
receiveOnlyMode	boolean	0..1	When set to 'true', the Content Provider indicates that the service is a Receive Only Mode service. This parameter is supplied by the SCEF	
serviceAnnouncement Mode	ServiceAnnouncementMode	0..1	Enumeration of Service Announcement Mode supplied by the SCEF.	
NOTE: Properties marked with a feature as defined in clause 5.8.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				

## 5.8.3.1.1.3 Type: GMDViaMBMSByxMB

This type represents the group message delivery via MBMS by xMB.

**Table 5.8.3.1.1.3-1: Definition of type GMDViaMBMSByxMB**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
self	Link	0..1	Link to the resource "Individual GMD via MBMS by xMB". This parameter shall be supplied by the SCEF in HTTP responses.	
notificationDestination	Link	1	A URI indicating the notification destination where T8 notification requests shall be delivered	
requestTestNotification	boolean	0..1	Set to true by the SCS/AS to request the SCEF to send a test notification as defined in clause 5.2.5.3. Set to false or omitted otherwise.	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	0..1	Configuration parameters to set up notification delivery over Websocket protocol as defined in clause 5.2.5.4.	Notification_websocket
mbmsLocArea	MbmsLocArea	0..1	Represents the location area within which the group message delivery via MBMS is allowed.	
messageDeliveryStartTime	DateTime	0..1	Identifies the absolute time at which the SCS/As starts to distribute the data. If absent, it indicates the message shall be sent immediately.	
messageDeliveryStopTime	DateTime	0..1	Identifies the absolute time at which the SCS/As is expected to stop distributing the data. If absent, configuration time will be used.	
groupMessagePayload	Bytes	0..1	Indicates the payload the SCS/AS intends to deliver to the UEs.	
scefMessageDeliveryIpv4	Ipv4AddrRo	0..1	Indicates the Ipv4 address where the SCEF wants to receive the data.	
scefMessageDeliveryIpv6	Ipv6AddrRo	0..1	Indicates the Ipv6 address where the SCEF wants to receive the data.	
scefMessageDeliveryPort	PortRo	0..1	Indicates the port number where the SCEF wants to receive the data.	
NOTE: Properties marked with a feature as defined in clause 5.8.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				

#### 5.8.3.1.1.4 Type: GMDByxMBNotification

This type represents the group message delivery notification.

**Table 5.8.3.1.1.4-1: Definition of type GMDByxMbNotification**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
transaction	Link	1	Link to the transaction resource to which this notification is related.	
deliveryTriggerStatus	boolean	1	Indicates whether delivery of group message payload was successful (TRUE) or not (FALSE)	
NOTE: Properties marked with a feature as defined in clause 5.8.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

#### 5.8.3.1.1.5 Type: GMDViaMBMSByxMBPatch

This type represents group message delivery via MBMS request. The structure is used for PATCH request.

**Table 5.8.3.1.1.5-1: Definition of the GMDViaMBMSByxMBPatch data type**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
mbmsLocArea	MbmsLocArea	0..1	Represents the location area within which the group message delivery via MBMS is allowed.	
messageDeliveryStartTime	DateTime	0..1	Identifies the absolute time at which the SCS/As starts to distribute the data. If absent, it indicates the message shall be sent immediately.	
messageDeliveryStopTime	DateTime	0..1	Identifies the absolute time at which the SCS/As is expected to stop distributing the data. If absent, the configuration value will be used.	
groupMessagePayload	Bytes	0..1	Indicates the payload the SCS/AS intends to deliver to the UEs.	
notificationDestination	Link	0..1	A URI indicating the notification destination where the notification requests shall be delivered	
NOTE: Properties marked with a feature as defined in clause 5.8.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

5.8.3.1.1.6 Type: MbmsLocArea

This data type represents the user location area which is sent from the SCS/AS to the SCEF by group message delivery via MBMS request.

**Table 5.8.3.1.1.6-1: Definition of the MbmsLocArea data type**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
cellId	array(string)	0..N	Indicates a Cell Global Identification of the user which identifies the cell the UE is registered.	
enodeBId	array(string)	0..N	Indicates an eNodeB in which the UE is currently located.	
geographicArea	array(Geographic Area)	0..N	Identifies a geographic area of the user where the UE is located.	
mbmsServiceAreaId	array(string)	0..N	Identifies an MBMS Service Area Identity of the user where the UE is located.	
civicAddress	array(CivicAddress)	0..N	Identifies a civic address of the user where the UE is located.	
NOTE: Properties marked with a feature as defined in clause 5.8.2.3 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				

5.8.3.1.2 Referenced simple data types and enumerations

5.8.3.1.2.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses. In addition, data types and enumerations defined in clause 5.2.1 can be referenced.

5.8.3.1.2.2 Simple data types

The simple data types defined in table 5.8.3.1.2.2-1 shall be supported.

**Table 5.8.3.1.2.2-1: Simple data types**

Type name	Description

## 5.8.3.1.2.3 Enumeration: ServiceAnnouncementMode

The enumeration ServiceAnnouncementMode represents the service announcement mode

**Table 5.8.3.1.2.3-1: Enumeration ServiceAnnouncementMode**

Enumeration value	Description	Applicability (NOTE)
SACH	BM-SC performs the service announcement for the current service using the SACH channel.	
CONTENT_PROVIDER	BM-SC provides the necessary service access information used by the Content Provider to create the service announcement information.	
NOTE: Properties marked with a feature as defined in clause 5.7.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		

## 5.8.3.2 Resource structure

## 5.8.3.2.1 General

All resource URIs of this API should have the following root:

**{apiRoot}/3gpp-group-message-delivery-xmb/v1**

"apiRoot" is set as described in clause 5.2.4. "apiName" shall be set to "3gpp-group-message-delivery-xmb" and "apiVersion" shall be set to "v1" for the version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:

Table 5.8.3.2.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	HTTP initiator	Meaning
xMB Services	/{scsAsId}/services	POST	SCS/AS	Create a service when xMB is used as a southbound interface.
		GET	SCS/AS	Read all active service resources for a given SCS/AS.
Individual xMB Service	/{scsAsId}/services/{serviceId}	GET	SCS/AS	Read an active service resource for a given SCS/AS and Service Id.
		DELETE	SCS/AS	Delete an existing service resource for a given SCS/AS and Service Id.
GMD via MBMS by xMB	/{scsAsId}/services/{serviceId}/delivery-via-mbms	GET	SCS/AS	Read all group message delivery resources for a given SCS/AS and Service Id.
		POST	SCS/AS	Create a group message delivery resource for given SCS/AS and Service Id when xMB is used as a southbound interface.
Individual GMD via MBMS by xMB	/{scsAsId}/services/{serviceId}/delivery-via-mbms/{transactionId}	PUT	SCS/AS	Replace a group message delivery resource
		PATCH	SCS/AS	Modify a group message delivery resource.
		GET	SCS/AS	Read a group message delivery resource.
		DELETE	SCS/AS	Delete a group message delivery resource.

### 5.8.3.2.2 Resource: xMB Services

#### 5.8.3.2.2.1 Introduction

This resource allows the SCS/AS to create service resource when the xMB is used as a southbound interface.

#### 5.8.3.2.2.2 Resource definition

Resource URI: {apiRoot}/3gpp-group-message-delivery-xmb/v1/{scsAsId}/services

This resource shall support the resource URI variables defined in table 5.8.3.2.2.2-1.

Table 5.8.3.2.2.2-1: Resource URI variables for resource "GMD via MBMS by xMB"

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.

#### 5.8.3.2.2.3 Resource methods

##### 5.8.3.2.2.3.1 GET

The GET method allows the SCS/AS read all active service resources for a given SCS/AS. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.3.2.2.3.1-1.

**Table 5.8.3.2.2.3.1-1: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none.			
Response body	Data type	Cardinality	Response codes	Remarks
	array(ServiceCreation)	0..N	200 OK	The service resource for the SCS/AS in the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.8.3.2.2.3.1-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.3.2.2.3.1-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.8.3.2.2.3.2 PUT

This HTTP method is not supported for the resource.

#### 5.8.3.2.2.3.3 PATCH

This HTTP method is not supported for the resource.

#### 5.8.3.2.2.3.4 POST

The POST method creates a new service resource for a given SCS/AS. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.3.2.2.3.4-1.



**Table 5.8.3.2.2.3.4-1: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	ServiceCreation	1	Parameters to create and authorize a service with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	ServiceCreation	1	201 Created	The resource of a service was created successfully. The SCEF shall return a data structure of type "ServiceCreation" in the response content. On success, the HTTP response shall include a "Location" HTTP header that points to the created resource URI identified by the ScsAsId and the ServiceId.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.8.3.2.2.3.4-2: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-group-message-delivery-xmb/v1/{scsAsId}/services/{serviceId}

#### 5.8.3.2.2.3.5 DELETE

This HTTP method is not supported for the resource.

### 5.8.3.2.3 Resource: Individual xMB Service

#### 5.8.3.2.3.1 Introduction

This resource allows the SCS/AS to delete a service resource.

#### 5.8.3.2.3.2 Resource definition

Resource URI: {apiRoot}/3gpp-group-message-delivery-xmb/v1/{scsAsId}/services/{serviceId}

This resource shall support the resource URI variables defined in table 5.8.3.2.3.2-1.

**Table 5.8.3.2.3.2-1: Resource URI variables for resource "Individual Service Creation"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
serviceId	string	Identifier of the service.

#### 5.8.3.2.3.3 Resource methods

##### 5.8.3.2.3.3.1 GET

The GET method reads a active service resource for a given SCS/AS and a service Id. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.3.2.3.3.1-1.

**Table 5.8.3.2.3.3.1-1: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	ServiceCreation	0..1	200 OK	The service resource for the SCS/AS and Service Id in the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.8.3.2.3.3.1-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.3.2.3.3.1-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**5.8.3.2.3.3.2 PUT**

This HTTP method is not supported for the resource.

**5.8.3.2.3.3.3 PATCH**

This HTTP method is not supported for the resource.

**5.8.3.2.3.3.4 POST**

This HTTP method is not supported for the resource.

**5.8.3.2.3.3.5 DELETE**

To delete a service resource, the SCS/AS shall use the HTTP DELETE method on the "ServiceCreation" resource which is indicated by the URI in the Location header of the HTTP POST response:

The possible response messages from the SCEF, depending on whether the DELETE request is successful or unsuccessful, are shown in table 5.8.3.2.3.3.5-1.

**Table 5.8.3.2.3.3.5-1.: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The group message delivery subscription was cancelled successfully.
	none		307 Temporary Redirect	Temporary redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply				

**Table 5.8.3.2.3.3.5-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.3.2.3.3.5-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.8.3.2.4 Resource: GMD via MBMS by xMB

##### 5.8.3.2.4.1 Introduction

This resource allows the SCS/AS to:

- read all of the group message delivery via MBMS by xMB resources for a given SCS/AS and a service identifier; or
- create a group message delivery when the xMB is used as a southbound interface.

##### 5.8.3.2.4.2 Resource definition

Resource URI: {apiRoot}/3gpp-group-message-delivery-xmb/v1/{scsAsId}/services/{serviceId}/delivery-via-mbms

This resource shall support the resource URI variables defined in table 5.8.3.2.4.2-1.

**Table 5.8.3.2.4.2-1: Resource URI variables for resource "GMD via MBMS by xMB"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
ServiceId	string	Identifier of the service

## 5.8.3.2.4.3 Resource methods

## 5.8.3.2.4.3.1 GET

The GET method reads all of the group message delivery via MBMS by xMB resources for a given SCS/AS and a service identifier. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.3.2.4.3.1-1.

**Table 5.8.3.2.4.3.1-1: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	None			
Response body	Data type	Cardinality	Response codes	Remarks
	array(GMDViaMBMSByxMB)	0..N	200 OK	The list of "GMDViaMBMSByxMB" data for the SCS/AS and the service identifier are returned.
	none		307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.8.3.2.4.3.1-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.3.2.4.3.1-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.8.3.2.4.3.2 PUT

This HTTP method is not supported for the resource.

## 5.8.3.2.4.3.3 PATCH

This HTTP method is not supported for the resource.

## 5.8.3.2.4.3.4 POST

The POST method creates a new group message delivery via MBMS resource for a given SCS/AS and service Id selected by the SCS/AS. It is initiated by the SCS/AS and answered by the SCEF. This method shall support request and response data structures, and response codes, as specified in the table 5.8.3.2.4.3.4-1.

**Table 5.8.3.2.4.3.4-1: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	GMDViaMBMSByxMB	1	Parameters to create and authorize a group message delivery via MBMS with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	GMDViaMBMSByxMB	1	201 Created	<p>The creation of a group message delivery was created successfully.</p> <p>The SCEF shall return a data structure of type "GMDViaMBMSByxMB" in the response content.</p> <p>On success, the HTTP response shall include a "Location" HTTP header that points to the created resource URI identified by the ScsAsId and the Transaction Id</p>

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.8.3.2.4.3.4-2: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-group-message-delivery-xmb/v1/{scsAsId}/services/{serviceId}/delivery-via-mbms/{transactionId}

#### 5.8.3.2.4.3.5 DELETE

This HTTP method is not supported for the resource.

#### 5.8.3.2.5 Resource: Individual GMD via MBMS by xMB

##### 5.8.3.2.5.1 Introduction

This resource allows the SCS/AS to modify or delete a group message delivery via MBMS resource.

##### 5.8.3.2.5.2 Resource definition

Resource URI: {apiRoot}/3gpp-group-message-delivery-xmb/v1/{scsAsId}/services/{serviceId}/delivery-via-mbms/{transactionId}

This resource shall support the resource URI variables defined in table 5.8.3.2.5.2-1.

**Table 5.8.3.2.5.2-1: Resource URI variables for resource "Individual GMD via MBMS by xMB"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
serviceId	string	Identifier of the service selected by the SCEF. The transactionId corresponds to the stage 2 TLTRI.

##### 5.8.3.2.5.3 Resource methods

###### 5.8.3.2.5.3.1 GET

The GET method reads a group message delivery via MBMS resource for a given SCS/AS, a service Id and a transactionId. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.3.2.3.3.1-1.

**Table 5.8.3.2.5.3.1-1: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	GMDViaMBMSByxMB	0..1	200 OK	The group message delivery resource for the SCS/AS in the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.8.3.2.5.3.1-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.3.2.5.3.1-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

### 5.8.3.2.5.3.2 PUT

Assuming that a group message delivery has been created using the HTTP POST method described in clause 5.8.3.2.4.3.4, replace of its properties can be performed by the SCS/AS by using the HTTP PUT method on the "delivery-via-mbms" instance resource as follows:

- the body of the message is encoded in JSON format with the data structure defined in table 5.8.3.1.1.3-1.

The content body of the group message delivery via MBMS update request shall contain updated full representation of the group message delivery resource. Only the properties "locationinfo", "accuracy", "messageDeliverystarttime", "messageDeliverystoptime" and "groupMessagepayload" can be modified.

The possible response messages from the SCEF, depending on whether the PUT request is successful or unsuccessful, are shown in table 5.8.3.2.5.3.2-1.

**Table 5.8.3.2.5.3.2-1: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	GMDViaMBMSByxMB	1	Parameters to replace group message delivery resource with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	GMDViaMBMSByxMB	1	200 OK	The group message delivery was modified successfully. The SCEF shall return an updated data structure of type "GMDViaMBMSByxMB" in the response content.
	none		204 No Content	The group message delivery was modified successfully, and no content is to be sent in the response message body.
	none		307 Temporary Redirect	Temporary redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				

**Table 5.8.3.2.5.3.2-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.3.2.5.3.2-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

### 5.8.3.2.5.3.3 PATCH

Assuming that a group message delivery has been created using the HTTP POST method described in clause 5.8.3.2.4.3.4, partial updating of its properties can be performed by the SCS/AS by using the HTTP PATCH method on the "delivery-via-mbms" instance resource.

This method shall support request and response data structures, and response codes, as specified in the table 5.8.3.2.5.3.3-1.

**Table 5.8.3.2.5.3.3-1: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	GMDViaMBMSByxMB Patch		1	Parameters to partially update a group message delivery with the SCEF.
Response body	Data type	Cardinality	Response codes	Remarks
	GMDViaMBMSByxMB	1	200 OK	The group message delivery was modified successfully. The SCEF shall return an updated data structure of type "GMDViaMBMSByxMB" in the response content.
	none		204 No Content	The group message delivery was modified successfully, and no content is to be sent in the response message body.
	none		307 Temporary Redirect	Temporary redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 also apply.				

**Table 5.8.3.2.5.3.3-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.3.2.5.3.3-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.8.3.2.5.3.4 POST

This HTTP method is not supported for the resource.

#### 5.8.3.2.5.3.5 DELETE

To cancel a group message delivery, the SCS/AS shall use the HTTP DELETE method on the individual "delivery\_via\_mbms" resource which is indicated by the URI in the Location header of the HTTP POST response:

The possible response messages from the SCEF, depending on whether the DELETE request is successful or unsuccessful, are shown in table 5.8.3.2.5.3.5-1.



**Table 5.8.3.2.5.3.5-1: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The group message delivery subscription was cancelled successfully.
	none		307 Temporary Redirect	Temporary redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				

**Table 5.8.3.2.5.3.5-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.8.3.2.5.3.5-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.8.3.2.6 Void

5.8.3.2A Notifications

5.8.3.2A.1 General

The notifications provided by the GMDviaMBMSbyxMB API are specified in this clause.

**Table 5.8.3.2A.1-1: Notifications overview**

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
GMD via MBMS by xMB Notification	{notificationDestination}	POST	Report a specific group message delivery result to the SCS/AS for a given Transaction Id selected by the SCEF.

## 5.8.3.2A.2 GMD via MBMS by xMB Notification

## 5.8.3.2A.2.1 Description

The GMD via MBMS by xMB Notification allows the SCEF report the delivery trigger status to the SCS/AS to indicate whether group message delivery was triggered successful.

## 5.8.3.2A.2.2 Target URI

The Callback URI "{notificationDestination}" shall be used with the callback URI variables defined in table 5.8.3.2A.2.2-1.

**Table 5.8.3.2A.2.2-1: Callback URI variables**

Name	Data type	Definition
notificationDestination	Link	A URI indicating the notification destination where T8 notification requests shall be delivered. This URI shall be provided within the field "notificationDestination" in the GMDViaMBMSByxMB type.

## 5.8.3.2A.2.3 Standard Methods

## 5.8.3.2A.2.3.1 Notification via POST

To report the status of the delivery trigger status to the SCS/AS, the SCEF shall use the HTTP POST method on the notification point as follows:

- the body of the message is encoded in JSON format with the data structure defined in table 5.8.3.1.1.4-1.

This method shall support the request data structures specified in table 5.8.3.2A.2.3.1-1 and the response data structures and response codes specified in table 5.8.3.2A.2.3.1-2.

**Table 5.8.3.2A.2.3.1-1: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
GMDByxMBNotification	1	The delivery status notification.

**Table 5.8.3.2A.2.3.1-2: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
Acknowledgement	1	200 OK	The successful acknowledgement of the notification with a body.
(None)		204 No Content	The successful acknowledgement of the notification without a body.
none		307 Temporary Redirect	Temporary redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.			

**Table 5.8.3.2A.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.8.3.2A.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

#### 5.8.3.2a.2.3.2 Notification via Websocket

If supported by both SCS/AS and SCEF and successfully negotiated, the GMDByxMBNotification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4.

### 5.8.3.3 Used Features

The table below defines the features applicable to the GMDviaMBMSbyxMB API. Those features are negotiated as described in clause 5.2.7.

**Table 5.8.3.3-1: Features used by GMDviaMBMSbyxMB API**

Feature Number	Feature	Description
1	Notification_websocket	The delivery of notifications over Websocket is supported according to clause 5.2.5.4. This feature requires that the Notification_test_event feature is also supported.
2	Notification_test_event	The testing of notification connection is supported according to clause 5.2.5.3.
Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".		
Description: A clear textual description of the feature.		

### 5.8.3.4 Error handling

#### 5.8.3.4.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

#### 5.8.3.4.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the GMDviaMBMSbyxMB API.

#### 5.8.3.4.3 Application Errors

The application errors defined for GMDviaMBMSbyxMB API are listed in table 5.8.3.4.3-1.

**Table 5.8.3.4.3-1: Application errors**

Application Error	HTTP status code	Description	Applicability

## 5.9 ReportingNetworkStatus API

### 5.9.1 Overview

The ReportingNetworkStatus API is a RESTful API that allows the SCS/AS to be one-time or continuous notified of the network status in a geographic area. The ReportingNetworkStatus API defines a set of data models, resources and the related procedures for the creation and management of the network status reporting request. The corresponding JSON schema for the representation of the resources and operations defined by the ReportingNetworkStatus API is provided in its complete form in Annex A.9.

### 5.9.2 Data model

#### 5.9.2.1 Resource data types

##### 5.9.2.1.1 Introduction

This clause defines data structures to be used in resource representations.

Table 5.9.2.1.1-1 specifies data types re-used by the ReportingNetworkStatus API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the ReportingNetworkStatus API.

**Table 5.9.2.1.1-1: ReportingNetworkStatus API re-used Data Types**

Data type	Reference	Comments
GeographicArea	3GPP TS 29.572 [42]	Identifies the geographical information of the user(s).
CivicAddress	3GPP TS 29.572 [42]	Identifies the civic address information of the user(s).
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.9.4-1.

Table 5.9.2.1.1-2 specifies the data types defined for the ReportingNetworkStatus API.

**Table 5.9.2.1.1-2: ReportingNetworkStatus API specific Data Types**

Data type	Clause defined	Description	Applicability
CongestionType	5.9.2.3.3	Represents abstracted values for congestion status.	
CongestionValue	5.9.2.3.2	Represents the congestion level value	
NetStatusRepSubsPatch	5.9.2.1.3	Represents the parameters to request the modification of network status reporting subscription.	PatchUpdate
NetworkStatusReportingNotification	5.9.2.2.2	Represents a network status reporting notification.	
NetworkStatusReportingSubscription	5.9.2.1.2	Represents a subscription to network status information reporting.	

##### 5.9.2.1.2 Type: NetworkStatusReportingSubscription

This type represents the subscription of reporting the network status. The same structure is used in the subscription request and subscription response.

Table 5.9.2.1.2-1: Definition of type NetworkStatusReportingSubscription

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
self	Link	0..1	Link to the resource "Individual Network Status Reporting subscription". This parameter shall be supplied by the SCEF in HTTP responses.	
supportedFeatures	SupportedFeatures	0..1	Used to negotiate the supported optional features of the API as described in clause 5.2.7. This attribute shall be provided in the POST request and in the response of successful resource creation.	
notificationDestination	Link	1	A URI indicating the notification destination where T8 notification requests shall be delivered	
requestTestNotification	boolean	0..1	Set to true by the SCS/AS to request the SCEF to send a test notification as defined in clause 5.2.5.3. Set to false or omitted otherwise.	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	0..1	Configuration parameters to set up notification delivery over Websocket protocol as defined in clause 5.2.5.4.	Notification_websocket
locationArea	LocationArea	1	Identifies a location area. It can be either a list of cell IDs, or a list of Tracking Areas, or civic addresses, or a geographic area, or a combination of any of the above.	
timeDuration	DateTime	0..1	Identifies the time for which a continuous reporting is requested. Shall not be provided for one time reporting case.	
thresholdValues	array(CongestionValue)	0..N	Identifies a list of congestion level(s) with exact value that the SCS/AS requests to be informed of when reached. (NOTE 2)	
thresholdTypes	array(CongestionType)	0..N	Identifies a list of congestion level(s) with abstracted value that the SCS/AS requests to be informed of when reached. (NOTE 2)	
NOTE 1: Properties marked with a feature as defined in clause 5.9.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				
NOTE 2: thresholdValues and thresholdTypes shall be mutually exclusive.				

### 5.9.2.1.3 Type: NetStatusRepSubsPatch

This data type represents the parameters to request the modification of network status reporting subscription.

**Table 5.9.2.1.3-1: Definition of type NetStatusRepSubsPatch**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
notificationDestination	Link	0..1	A URI indicating the notification destination where T8 notification requests shall be delivered.	
locationArea	LocationArea	0..1	Identifies a location area. It can be either a list of cell IDs, or a list of Tracking Areas, or civic addresses, or a geographic area, or a combination of any of the above.	
timeDuration	DateTimeRm	0..1	Identifies the time for which a continuous reporting is requested. Shall not be provided for one time reporting case.	
thresholdValues	array(CongestionValue)	0..N	Identifies a list of congestion level(s) with exact value that the SCS/AS requests to be informed of when reached. (NOTE 2)	
thresholdTypes	array(CongestionType)	0..N	Identifies a list of congestion level(s) with abstracted value that the SCS/AS requests to be informed of when reached. (NOTE 2)	
NOTE 1: Properties marked with a feature as defined in clause 5.9.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				
NOTE 2: The "thresholdValue" attribute and the "thresholdType" attribute shall be mutually exclusive.				

## 5.9.2.2 Notification data types

### 5.9.2.2.1 Introduction

This clause defines data structures to be used in notifications.

#### 5.9.2.2.2 Type: NetworkStatusReportingNotification

This data type represents a network status reporting notification which is sent from the SCEF to the SCS/AS.

**Table 5.9.2.2.2-1: Definition of type NetworkStatusReportingNotification**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
subscription	Link	1	Link to the subscription resource to which this notification is related.	
nsiValue	CongestionValue	0..1	Network Status Indicator based on exact value for congestion status received from RCAF(s). (NOTE 2)	
nsiType	CongestionType	0..1	Network Status Indicator based on abstracted value for congestion status. (NOTE 2)	
NOTE 1: Properties marked with a feature as defined in clause 5.9.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				
NOTE 2: nsiValue and nsiType shall be mutually exclusive.				

### 5.9.2.3 Referenced simple data types and enumerations

#### 5.9.2.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses. In addition, data types and enumerations defined in clause 5.2.1 can be referenced.

#### 5.9.2.3.2 Simple data types

The simple data types defined in table 5.9.2.3.2-1 shall be supported.

**Table 5.9.2.3.2-1: Simple data types**

Type name	Description
CongestionValue	Unsigned integer with valid values between 0 and 31. The value 0 indicates that there is no congestion. The value 1 is the lowest congestion level and value 31 is the highest congestion level.

#### 5.9.2.3.3 Enumeration: CongestionType

The enumeration CongestionType represents abstracted values for congestion status.

**Table 5.9.2.3.3-1: Enumeration CongestionType**

Enumeration value	Description	Applicability (NOTE)
HIGH	The congestion status is high.	
MEDIUM	The congestion status is medium.	
LOW	The congestion status is low.	
NOTE:	Properties marked with a feature as defined in clause 5.9.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.	

## 5.9.3 Resource structure

### 5.9.3.1 General

All resource URIs of this API should have the following root:

**{apiRoot}/3gpp-net-stat-report/v1**

"apiRoot" is set as described in clause 5.2.4. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:

**Table 5.9.3.1-1: Resources and methods overview**

Resource name	Resource URI	HTTP method	Meaning
Network Status Reporting Subscriptions	/{scsAsId}/subscriptions	GET	Read all network status reporting subscription resources for a given SCS/AS.
		POST	Create a new network status reporting subscription resource.
Individual Network Status Reporting subscription	/{scsAsId}/subscriptions/{subscriptionId}	GET	Read a network status reporting subscription resource.
		PUT	Update an existing Individual Network Status Reporting Subscription resource.
		PATCH	Modify an existing Individual Network Status Reporting Subscription resource.
		DELETE	Delete an existing continuous network status reporting subscription resource.

### 5.9.3.2 Resource: Network Status Reporting Subscriptions

#### 5.9.3.2.1 Introduction

This resource allows the SCS/AS to read all active long-term subscriptions related to a network status reporting.

#### 5.9.3.2.2 Resource definition

Resource URI: {apiRoot}/3gpp-net-stat-report/v1/{scsAsId}/subscriptions

This resource shall support the resource URI variables defined in table 5.9.3.2.2-1.

**Table 5.9.3.2.2-1: Resource URI variables for resource "Network Status Reporting Subscriptions"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.

#### 5.9.3.2.3 Resource methods

##### 5.9.3.2.3.1 GET

The GET method allows to read all active network status reporting subscriptions for a given SCS/AS. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.9.3.2.3.1-1 and table 5.9.3.2.3.1-2.

**Table 5.9.3.2.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			



**Table 5.9.3.2.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	array(NetworkStatusReportingSubscription)	0..N	200 OK	The information about the network status reporting subscriptions related to the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.9.3.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.9.3.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.9.3.2.3.2 PUT

This HTTP method is not supported for the resource.

#### 5.9.3.2.3.3 PATCH

This HTTP method is not supported for the resource.

#### 5.9.3.2.3.4 POST

The POST method creates a new network status reporting subscription resource for a given SCS/AS. The SCS/AS shall initiate the HTTP POST request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.9.3.2.3.4-1 and table 5.9.3.2.3.4-2.

**Table 5.9.3.2.3.4-1: URI query parameters supported by the POST method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.9.3.2.3.4-2: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	NetworkStatusReporting Subscription		1	Parameters to register a subscription to request notifications about network status information report with the SCEF.
Response body	Data type	Cardinality	Response codes	Remarks
	NetworkStatusReporting Subscription	1	201 Created	The subscription was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)

NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.  
NOTE 2: Failure cases are described in clause 5.9.5.3.

**Table 5.9.3.2.3.4-3: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-net-stat-report/v1/{scsAsId}/subscriptions/{subscriptionId}

#### 5.9.3.2.3.5 DELETE

This HTTP method is not supported for the resource.

### 5.9.3.3 Resource: Individual Network Status Reporting Subscription

#### 5.9.3.3.1 Introduction

This resource allows the SCS/AS to request for being notified about the network status using a long-term subscription.

#### 5.9.3.3.2 Resource definition

Resource URI: {apiRoot}/3gpp-net-stat-report/v1/{scsAsId}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.9.3.3.2-1.

**Table 5.9.3.3.2-1: Resource URI variables for resource "Individual Network Status Reporting Subscription"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
subscriptionId	string	Identifier of the subscription resource. The subscriptionId corresponds to the stage 2 TLTRI.

#### 5.9.3.3.3 Resource methods

##### 5.9.3.3.3.1 GET

The GET method allows to read an active network status reporting subscription resource. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.9.3.3.3.1-1 and table 5.9.3.3.3.1-2.

**Table 5.9.3.3.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.9.3.3.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
none				
Response body	Data type	Cardinality	Response codes	Remarks
	NetworkStatusReporting Subscription	1	200 OK	The subscription information related to the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.9.3.3.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.9.3.3.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.9.3.3.3.2 PUT

The PUT method updates an existing subscription resource to update a subscription. The SCS/AS shall initiate the HTTP PUT request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.9.3.3.3.2-1 and table 5.9.3.3.3.2-2.

**Table 5.9.3.3.3.2-1: URI query parameters supported by the PUT method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.9.3.3.2-2: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	NetworkStatusReporting Subscription	1	Parameters to update a subscription to request notifications about network status information report with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	NetworkStatusReporting Subscription	1	200 OK	The subscription was updated successfully.
	none		204 No Content	The subscription was updated successfully.
	none		307 Temporary Redirect	Temporary redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				

**Table 5.9.3.3.2-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.9.3.3.2-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

### 5.9.3.3.3.3 PATCH

The PATCH method modifies an existing subscription resource to modify a subscription. The SCS/AS shall initiate the HTTP PATCH request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures and response codes specified in the table 5.9.3.3.3-1 and table 5.9.3.3.3-2.

**Table 5.9.3.3.3-1: URI query parameters supported by the PATCH method on this resource**

Name	Data type	Cardinality	Remarks
n/a			

**Table 5.9.3.3.3-2: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	NetStatusRepSubsPatch	1	Contains the parameters to modify an existing Individual Network Status Reporting Subscription resource.	
Response body	Data type	Cardinality	Response codes	Remarks
	NetworkStatusReportingSubscription	1	200 OK	The modification of the Individual Network Status Reporting Subscription resource was successful.  The SCEF shall return an updated representation of the resource within the NetworkStatusReportingSubscription data structure in the response message body.
	n/a		204 No Content	The modification of the Individual Network Status Reporting Subscription resource was successful and no content is to be sent in the response message body.
	n/a		307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.
	n/a		308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.
NOTE 1: The mandatory HTTP error status codes for the HTTP PATCH method listed in table 5.2.6-1 also apply.				

**Table 5.9.3.3.3-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.9.3.3.3-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**5.9.3.3.3.4 POST**

This HTTP method is not supported for the resource.

**5.9.3.3.3.5 DELETE**

The DELETE method deletes the resource and terminates the related network status reporting subscription. The SCS/AS shall initiate the HTTP DELETE request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.9.3.3.3.5-1 and table 5.9.3.3.3.5-2.

**Table 5.9.3.3.3.5-1: URI query parameters supported by the DELETE method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.9.3.3.3.5-2: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The subscription was terminated successfully.
	none		307 Temporary Redirect	Temporary redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				

**Table 5.9.3.3.3.5-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.9.3.3.3.5-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.9.3.4 Void

5.9.3A Notifications

5.9.3A.1 General

The notifications provided by the ReportingNetworkStatus API are specified in this clause.

**Table 5.9.3A-1: Notifications overview**

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Network Status Reporting Notification	{notificationDestination}	POST	Report a detected network status for a subscription from the SCEF to the SCS/AS

## 5.9.3A.2 Network Status Reporting Notification

### 5.9.3A.2.1 Description

The Network Status Reporting Notification allows the SCEF to send notifications about the detected network status to the SCS/AS.

### 5.9.3A.2.2 Target URI

The Callback URI "{notification\_uri}" shall be used with the callback URI variables defined in table 5.9.3A.2.2-1.

**Table 5.9.3A.2.2-1: Callback URI variables**

Name	Data type	Definition
notificationDestination	Link	Callback reference provided by the SCS/AS during creation or modification of the network status reporting subscription.

### 5.9.3A.2.3 Standard Methods

#### 5.9.3A.2.3.1 Notification via POST

The HTTP POST method reports the detected network status for a network status subscription. The SCEF shall initiate the HTTP POST request message and the SCS/AS shall respond to the message.

This method shall support the request data structures specified in table 5.9.3A.2.3.1-1 and the response data structures and response codes specified in table 5.9.3A.2.3.1-2.

**Table 5.9.3A.2.3.1-1: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
NetworkStatusReportingNotification	1	The network status reporting notification provided by the SCEF.

**Table 5.9.3A.2.3.1-2: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
none		204 No Content	The network status reporting notification is received successfully.
none		307 Temporary Redirect	Temporary redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.9.3A.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.9.3A.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

#### 5.9.3A.2.3.2 Notification via Websocket

If supported by both SCS/AS and SCEF and successfully negotiated, the NetworkStatusReportingNotification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4.

## 5.9.4 Used Features

The table below defines the features applicable to the ReportingNetworkStatus API. Those features are negotiated as described in clause 5.2.7.

**Table 5.9.4-1: Features used by ReportingNetworkStatus API**

Feature Number	Feature	Description
1	Notification_websocket	The delivery of notifications over Websocket is supported according to clause 5.2.5.4. This feature requires that the Notification_test_event feature is also supported.
2	Notification_test_event	The testing of notifications connections is supported according to clause 5.2.5.3.
3	PatchUpdate	Indicates the support of enhancements to the northbound interfaces (e.g. support the partial modification of an existing subscription resource).
Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".		
Description: A clear textual description of the feature.		

## 5.9.5 Error handling

### 5.9.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

### 5.9.5.2 Protocol Errors

In this release of the specification, there are no additional protocol errors applicable for the ReportingNetworkStatus API.

### 5.9.5.3 Application Errors

The application errors defined for the ReportingNetworkStatus API are listed in table 5.9.5.3-1.

**Table 5.9.5.3-1: Application errors**

Application Error	HTTP status code	Description
QUOTA_EXCEEDED	403 Forbidden	Not enough quota for SCS/AS.



## 5.10 CpProvisioning API

### 5.10.1 Overview

The CpProvisioning API is a RESTful API that allows the SCS/AS to add, change or delete the communication pattern parameter sets of the UE. The CpProvisioning API defines a set of data models, resources and the related procedures for the creation and management of the resources for communication pattern parameter provisioning. The corresponding JSON schema for the representation of the resources and operations defined by the CpProvisioning API is provided in its complete form in Annex A.10.

### 5.10.2 Data model

#### 5.10.2.1 Resource data types

##### 5.10.2.1.1 Introduction

This clause defines data structures to be used in resource representations.

Table 5.10.2.1.1-1 specifies data types re-used by the CpProvisioning API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the CpProvisioning API.

**Table 5.10.2.1.1-1: CpProvisioning API re-used Data Types**

Data type	Reference	Comments
Dnn	3GPP TS 29.571 [45]	Identifies a DNN.
IpAddr	3GPP TS 29.571 [45]	UE IP Address.
MacAddr48	3GPP TS 29.571 [45]	MAC Address.
NetworkAreaInfo	3GPP TS 29.554 [50]	Identifies a network area information.
Snsai	3GPP TS 29.571 [45]	Identifies the S-NSSAI.
TimeWindow	5.2.1.2.3	Identifies the time window from the start time to the end time.
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.10.4-1.

Table 5.10.2.1.1-2 specifies the data types defined for the CpProvisioning API.

Table 5.10.2.1.1-2: CpProvisioning API specific Data Types

Data type	Clause defined	Description	Applicability
AppExpUeBehaviour	5.10.2.2.6	Contains the Application Specific Expected UE Behaviour parameters.	AppExpUeBehaviour
BatteryIndication	5.10.2.3.6	Represents the type of power consumption.	
CommunicationIndicator	5.10.2.3.3	Represents the communication type used by the UE.	
CpFailureCode	5.10.2.3.5	Represents the failure reason of the CP parameter provisioning.	
CpInfo	5.10.2.1.2	Represents the resources for communication pattern parameter provisioning.	
CpParameterSet	5.10.2.2.2	Represents an offered communication pattern parameter set.	
CpReport	5.10.2.2.4	Represents a CP report indicating the CP set identifier(s) which CP parameter(s) are not added or modified successfully and the corresponding failure cause(s).	
ScheduledCommunicationTime	5.10.2.2.3	Represents an offered scheduled communication time.	
ScheduledCommunicationType	5.10.2.3.8a	Represents the type of scheduled communication.	ScheduledCommunicationType_5G
StationaryIndication	5.10.2.3.4	Indicates whether the UE is stationary or mobile.	
TrafficProfile	5.10.2.3.7	Represents the type of data transmission.	
UmtLocationArea5G	5.10.2.2.5	Represents the user location area describing the UE moving trajectory.	ExpectedUMT_5G, ExpectedUmtTime_5G

#### 5.10.2.1.2 Type: CpInfo

This type represents the resources for communication pattern parameter provisioning. The same structure is used in the subscription request and subscription response.

**Table 5.10.2.1.2-1: Definition of type CplInfo**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 2)
self	Link	0..1	Link to the resource "Individual CP Provisioning Subscription". This parameter shall be supplied by the SCEF in HTTP responses.	
supportedFeatures	SupportedFeatures	0..1	Used to negotiate the supported optional features of the API as described in clause 5.2.7. This attribute shall be provided in the POST request and in the response of successful resource creation.	
mtcProviderId	string	0..1	Identifies the MTC Service Provider and/or MTC Application. (NOTE 3)	
dnn	Dnn	0..1	Identifies a DNN, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only.	UEId_retrieval
externalId	ExternalId	0..1	Each element uniquely identifies a user as defined in Clause 4.6.2 of 3GPP TS 23.682 [2].  The attribute may also be present in the CP provisioning subscription response message, if the "UEId_retrieval" feature is supported and the corresponding request message includes the "ueIpAddr" attribute or the "ueMacAddr" attribute.  (NOTE 1)	
msisdn	Msisdn	0..1	Each element identifies the MS internal PSTN/ISDN number allocated for a UE.  (NOTE 1)	
externalGroupId	ExternalGroupId	0..1	Identifies a user group as defined in Clause 4.6.2 of 3GPP TS 23.682 [2].  (NOTE 1)	
cpParameterSets	map(CpParameterSet)	1..N	Identifies a set of CP parameter information that may be part of this CpInfo structure. Any string value can be used as a key of the map.	
cpReports	map(CpReport)	0..N	Supplied by the SCEF and contains the CP set identifiers for which CP parameter(s) are not added or modified successfully. The failure reason is also included. Each element provides the related information for one or more CP set identifier(s) and is identified in the map via the failure identifier as key.  (NOTE 4).	
snssai	Snssai	0..1	Indicate the S-NSSAI.	UEId_retrieval
ueIpAddr	IpAddr	0..1	UE IP address.	UEId_retrieval
ueMacAddr	MacAddr48	0..1	UE MAC address.	UEId_retrieval

NOTE 1: One of the properties "externalId", "msisdN" or "externalGroupID" shall be included.

NOTE 2: Properties marked with a feature as defined in clause 5.10.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.

NOTE 3: The SCEF should check received MTC provider identifier and then the SCEF may:

- override it with local configured value and send it to HSS;
- send it directly to the HSS; or
- reject the communication pattern parameter provisioning request.

NOTE 4: The failure identifier is a string encoded map key.

## 5.10.2.2 Referenced structured data types

### 5.10.2.2.1 Introduction

This clause defines structured data types that are referenced from data structures defined in the previous clauses.

### 5.10.2.2.2 Type: CpParameterSet

This data type represents an offered communication pattern parameter set sent from the SCC/AS to the SCEF.

**Table 5.10.2.2.2-1: Definition of type CpParameterSet**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
setId	string	1	SCS/AS-chosen correlator provided by the SCS/AS in the request to create a resource fo CP parameter set(s). (NOTE 4)	
self	Link	0..1	Link to the resource "Individual CP set Provisioning". This parameter shall be supplied by the SCEF in HTTP responses.	
validityTime	DateTime	0..1	Identifies when the CP parameter set expires and shall be deleted. If absent, it indicates that there is no expiration time for this CP parameter set.	
periodicCommunicationIndicator	Communication Indicator	0..1	Identifies whether UE communicates periodically or on demand.	
communicationDurationTime	DurationSec	0..1	Identifies duration time of periodic communication.	
periodicTime	DurationSec	0..1	Identifies interval time of periodic communication.	
scheduledCommunicationTime	ScheduledCommunicationTime	0..1	Identifies time zone and day of the week when the UE is available for communication.	
scheduledCommunicationType	ScheduledCommunicationType	0..1	Indicates the Scheduled Communication Type. May only be present if the "scheduledCommunicationTime" attribute is provided.	ScheduledCommType_5G
stationaryIndication	StationaryIndication	0..1	Identifies whether the UE is stationary or mobile.	
batteryInds	array(BatteryIndication)	0..N	Indicates the power consumption type(s) of the UE. (NOTE 3)	
trafficProfile	TrafficProfile	0..1	Identifies the type of data transmission.	
expectedUmts	array(UmtLocationArea5G)	0..N	Identifies the UE's expected geographical movement. The attribute is only applicable in 5G. (NOTE 2)	ExpectedUMT_5G ExpectedUmtTime_5G
expectedUmtDays	DayOfWeek	0..6	Identifies the day of the week. If absent, it indicates every day of the week.	ExpectedUmtTime_5G
expectedUmtDaysAdd	array(DayOfWeek)	0..5	Identifies the additional day(s) of the week. (NOTE 5)	ExpectedUmtTime_Add
appExpUeBehv	AppExpUeBehaviour	0..1	Contains the Application Specific Expected UE Behaviour parameters.	AppExpUeBehaviour
confidenceLevel	string	0..1	When present, this IE indicates the Confidence level for the associated Expected UE Behaviour parameter.  The value shall be between 0.01 and 1.00 with a step size of 0.01, represented as string.  If not present, confidence level 1.00 applies.  Pattern: '^([0]\.[0-9]{2}) ([1.00])\$'	ConfAccuLevels
accuracyLevel	string	0..1	When present, this IE indicates the accuracy level for the associated Expected UE Behaviour parameter.  The value shall be between 0.01 and 1.00 with a step size of 0.01, represented as string.  If not present, accuracy level 1.00 applies.  Pattern: '^([0]\.[0-9]{2}) ([1.00])\$'	ConfAccuLevels

NOTE 1:	Properties marked with a feature as defined in clause 5.10.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.
NOTE 2:	The first instance of the attribute represents the start of the location, and the last one represents the stop of the location.
NOTE 3:	If "BATTERY_RECHARGE" is provided, "BATTERY_NO_RECHARGE" shall not be provided simultaneously, vice versa; If "BATTERY_REPLACE" is provided, "BATTERY_NO_REPLACE" shall not be provided simultaneously, vice versa; If "NO_BATTERY" is provided, any value indicating UE powered with battery shall not be provided simultaneously, vice versa.
NOTE 4:	A setId can only belong to one "Individual CP Provisioning Subscription" resource.
NOTE 5:	The "expectedUmtDaysAdd" attribute may only be provided to indicate the additional day(s) if the "expectedUmtDays" attribute is also provided.

### 5.10.2.2.3 Type: ScheduledCommunicationTime

This data type represents an offered scheduled communication time.

**Table 5.10.2.2.3-1: Definition of type ScheduledCommunicationTime**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
daysOfWeek	array(DayOfWeek)	0..6	Identifies the day(s) of the week. If absent, it indicates every day of the week.	
timeOfDayStart	TimeOfDay	0..1	Identifies the start time of the day.	
timeOfDayEnd	TimeOfDay	0..1	Identifies the end time of the day.	
NOTE:	Properties marked with a feature as defined in subclause 5.10.4 are applicable as described in subclause 5.2.7. If no features are indicated, the related property applies for all the features.			

### 5.10.2.2.4 Type: CpReport

This type represents a CP report to indicate the CP set identifier(s) which CP parameter(s) are not added or modified successfully and corresponding failure reason.

**Table 5.10.2.2.4-1: Definition of type CpReport**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
setIds	array(string)	0..N	Identifies the CP set identifier(s) which CP parameter(s) are not added or modified successfully	
failureCode	CpFailureCode	1	Identifies the failure reason	
NOTE:	Properties marked with a feature as defined in subclause 5.10.4 are applicable as described in subclause 5.2.7. If no features are indicated, the related property applies for all the features.			

### 5.10.2.2.5 Type: UmtLocationArea5G

This data type represents the user location area describing the UE moving trajectory which is sent from the AF.



**Table 5.10.2.2.5-1: Definition of the UmtLocationArea5G data Type**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
umtTime	TimeOfDay	0..1	This IE identifies the time of the day when the UE arrives the location.	ExpectedUmtTime_5G
umtDuration	DurationSec	0..1	This IE identifies the time duration the UE stays in the location.	ExpectedUmtTime_5G
NOTE 1: Properties marked with a feature as defined in clause 5.10.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				
NOTE 2: This data type also contains all the properties defined for LocationArea5G data type, these properties are applicable for ExpectedUMT_5G.				

5.10.2.2.6 Type: AppExpUeBehaviour

**Table 5.10.2.2.6-1: Definition of type AppExpUeBehaviour**

Attribute name	Data type	P	Cardinality	Description	Applicability
appld	string	C	0..1	Indicates the Application Identifier. (NOTE 1)	
expPduSesInacTm	TimeWindow	O	0..1	Identifies the expected PDU Session Inactivity time during which the UE will not have traffic related to the application.	
flowDescriptions	array(string)	C	0..N	Represents a 3-tuple with protocol, server ip and server port for UL/DL application traffic. The content of the string has the same encoding as the IPFilterRule AVP value as defined in IETF RFC 6733 [46]. (NOTE 1)	
confidenceLevel	string	O	0..1	When present, this IE indicates the Confidence level for the associated Application-Specific Expected UE Behaviour parameter.  The value shall be between 0.01 and 1.00 with a step size of 0.01, represented as string.  If not present, confidence level 1.00 applies.  Pattern: ' <code>^([0-9]{2})[1.00]\$</code> '	
accuracyLevel	string	O	0..1	When present, this IE indicates the accuracy level for the associated Application-Specific Expected UE Behaviour parameter.  The value shall be between 0.01 and 1.00 with a step size of 0.01, represented as string.  If not present, accuracy level 1.00 applies.  Pattern: ' <code>^([0-9]{2})[1.00]\$</code> '	
failureCode	CpFailureCode	O	0..1	Identifies the failure reason for the Application-Specific Expected UE Behaviour parameter is not added or modified successfully.  If absent, the value of the "failureCode" attribute in the higher-level "CpInfo" data type shall be used. (NOTE 3)	
validityTime	DateTime	O	0..1	Identifies when the Application-Specific Expected UE Behaviour parameter expires.  If absent, the value of the "validityTime" attribute in the higher-level "CpParameterSet" data type shall be used. (NOTE 2)	

NOTE 1: One of the "appld" attribute or "flowDescriptions" attribute shall be included.  
 NOTE 2: The attribute if provided, take precedence over the "validityTime" attribute in the higher-level "CpParameterSet" data type.  
 NOTE 3: The attribute if provided, take precedence over the "failureCode" attribute in the higher-level "CpInfo" data type.

### 5.10.2.3 Referenced simple data types and enumerations

#### 5.10.2.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses. In addition, data types and enumerations defined in clause 5.2.1 can be referenced.

#### 5.10.2.3.2 Simple data types

The simple data types defined in table 5.10.2.3.2-1 shall be supported.

**Table 5.10.2.3.2-1: Simple data types**

Type name	Description

#### 5.10.2.3.3 Enumeration: CommunicationIndicator

**Table 5.10.2.3.3-1: Enumeration CommunicationIndicator**

Enumeration value	Description	Applicability (NOTE)
PERIODICALLY	Identifies the UE communicates periodically	
ON_DEMAND	Identifies the UE communicates on demand	
NOTE: Properties marked with a feature as defined in clause 5.10.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		

#### 5.10.2.3.4 Enumeration: StationaryIndication

**Table 5.10.2.3.4-1: Enumeration StationaryIndication**

Enumeration value	Description	Applicability (NOTE)
STATIONARY	Identifies the UE is stationary	
MOBILE	Identifies the UE is mobile	
NOTE: Properties marked with a feature as defined in clause 5.10.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		

#### 5.10.2.3.5 Enumeration: CpFailureCode

The enumeration FailureCode represents the failure reason of the CP parameter provisioning.

**Table 5.10.2.3.5-1: Enumeration CpFailureCode**

Enumeration value	Description	Applicability (NOTE)
MALFUNCTION	This value indicates that something functions wrongly in CP parameter provisioning or the CP parameter provisioning does not function at all.	
SET_ID_DUPLICATED	The received CP set identifier(s) are already provisioned.	
OTHER_REASON	Other reason unspecified.	
CONFIDENCE_LEVEL_NOT_SUFFICIENT	This value indicate that the confidence level provided is not sufficient	ConfAccuLevels
ACCURACY_LEVEL_NOT_SUFFICIENT	This value indicate that the accuracy level provided is not sufficient	ConfAccuLevels
NOTE: Properties marked with a feature as defined in clause 5.10.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		

### 5.10.2.3.6 Enumeration: BatteryIndication

The enumeration BatteryIndication represents the type of power consumption.

**Table 5.10.2.3.6-1: Enumeration BatteryIndication**

Enumeration value	Description	Applicability (NOTE)
BATTERY_RECHARGE	UE powered with rechargeable battery.	
BATTERY_REPLACE	UE powered with replaceable battery.	
BATTERY_NO_RECHARGE	UE powered with no rechargeable battery.	
BATTERY_NO_REPLACE	UE powered with no replaceable battery.	
NO_BATTERY	UE not battery powered.	
NOTE: Properties marked with a feature as defined in clause 5.10.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		

### 5.10.2.3.7 Enumeration: TrafficProfile

The enumeration TrafficProfile represents the type of data transmission.

**Table 5.10.2.3.7-1: Enumeration TrafficProfile**

Enumeration value	Description	Applicability (NOTE)
SINGLE_TRANS_UL	Uplink single packet transmission.	
SINGLE_TRANS_DL	Downlink single packet transmission.	
DUAL_TRANS_UL_FIRST	Dual packet transmission, firstly uplink packet transmission with subsequent downlink packet transmission.	
DUAL_TRANS_DL_FIRST	Dual packet transmission, firstly downlink packet transmission with subsequent uplink packet transmission.	
MULTI_TRANS	Multiple packet transmission.	
NOTE: Properties marked with a feature as defined in clause 5.10.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		

### 5.10.2.3.8A Enumeration: ScheduledCommunicationType

The enumeration ScheduledCommunicationType represents the type of scheduled communication.

**Table 5.10.2.3.8A-1: Enumeration ScheduledCommunicationType**

Enumeration value	Description
DOWNLINK	Downlink only
UPLINK	Uplink only
BIDIRECTIONAL	Bi-directional

## 5.10.3 Resource structure

### 5.10.3.1 General

All resource URIs of this API should have the following root:

**{apiRoot}/3gpp-cp-parameter-provisioning/v1**

"apiRoot" is set as described in clause 5.2.4. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:

**Table 5.10.3.1-1: Resources and methods overview**

Resource name	Resource URI	HTTP method	Meaning
CP provisioning Subscriptions	//{scsAsId}/subscriptions	GET	Read all active CP parameter provisioning subscription resources for a given SCS/AS.
		POST	Create a new subscription resource of provisioning CP parameter set(s).
Individual CP Provisioning Subscription	//{scsAsId}/subscriptions/{subscriptionId}	GET	Read a CP parameter provisioning subscription resource.
		PUT	Modify a CP parameter provisioning subscription resource.
		DELETE	Delete a CP parameter provisioning subscription resource.
Individual CP set Provisioning	//{scsAsId}/subscriptions/{subscriptionId}/cpSets/{setId}  (NOTE 1, NOTE 2)	PUT	Update CP at individual CP set(s) level associated with a CP parameter set Id.
		GET	Read CP at individual CP set(s) level associated with a CP parameter set Id.
		DELETE	Delete CP at individual CP set(s) level associated with a CP parameter set Id.
NOTE 1: This setId as a resource identifier is not necessarily identical as the CP parameter set Id received from the SCS/AS.			
NOTE 2: The path segment "cpSets" does not follow the related naming convention defined in clause 5.2.4. The path segment is however kept as currently defined in this specification for backward compatibility considerations.			

### 5.10.3.2 Resource: CP Provisioning Subscriptions

#### 5.10.3.2.1 Introduction

This resource allows the SCS/AS to read all active long-term transactions related to CP parameter provisioning resource management.

## 5.10.3.2.2 Resource definition

Resource URI: {apiRoot}/3gpp-cp-parameter-provisioning/v1/{scsAsId}/subscriptions

This resource shall support the resource URI variables defined in table 5.10.3.2.2-1.

**Table 5.10.3.2.2-1: Resource URI variables for resource "CP Provisioning Subscriptions"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.

## 5.10.3.2.3 Resource methods

## 5.10.3.2.3.1 GET

The GET method allows to read all active subscriptions for a given SCS/AS. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.10.3.2.3.1-1 and table 5.10.3.2.3.1-2.

**Table 5.10.3.2.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.10.3.2.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	array(CpInfo)	0..N	200 OK	The subscription information related to the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.

**Table 5.10.3.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.10.3.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.10.3.2.3.2 PUT

This HTTP method is not supported for the resource.

## 5.10.3.2.3.3 PATCH

This HTTP method is not supported for the resource.

## 5.10.3.2.3.4 POST

The POST method allows to create subscription for a given SCS/AS. The SCS/AS shall initiate the HTTP POST request message and the SCEF shall respond to the message.

This method shall support request and response data structures, and response codes, as specified in the table 5.10.3.2.3.4-1.

**Table 5.10.3.2.3.4-1: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	CpInfo	1	Change information in CP parameter set.	
Response body	Data type	Cardinality	Response codes	Remarks
	CpInfo	1	201 Created	The subscription was created successfully. The SCEF shall return the created subscription in the response content. CpReport may be included to provide detailed failure information for some CP sets.
	array(CpReport)	1..N	500 Internal Server Error	The CP parameters for all CP sets were not created successfully. CpReport is included with detailed information.
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)
	ProblemDetails	0..1	404 Not Found	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.				
NOTE 2: Failure causes are described in clause 5.10.5.				

**Table 5.10.3.2.3.4-2: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-cp-parameter-provisioning/v1/{scsAsId}/subscriptions/{subscriptionId}

## 5.10.3.2.3.5 DELETE

This HTTP method is not supported for the resource.



### 5.10.3.3 Resource: Individual CP Provisioning Subscription

#### 5.10.3.3.1 Introduction

This resource allows the SCS/AS to manage resources for CP parameter provisioning using a subscription Id.

#### 5.10.3.3.2 Resource definition

Resource URI: **{apiRoot}/3gpp-cp-parameter-provisioning/v1/{scsAsId}/subscriptions/{subscriptionId}**

This resource shall support the resource URI variables defined in table 5.10.3.3.2-1.

**Table 5.10.3.3.2-1: Resource URI variables for resource "Individual CP Provisioning Subscription"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
subscriptionId	string	Identifier of the subscription resource. The subscriptionId corresponds to the stage 2 TLTRI.

#### 5.10.3.3.3 Resource methods

##### 5.10.3.3.3.1 GET

The GET method allows to read the subscription for a given SCS/AS and subscription Id. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.10.3.3.3.1-1 and table 5.10.3.3.3.1-2.

**Table 5.10.3.3.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.10.3.3.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	CpInfo	1	200 OK	The subscription information related to the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.10.3.3.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.10.3.3.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.10.3.3.3.2 PUT

The PUT method allows to change (add/update/remove) one or more CP parameter set(s) resource(s). The SCS/AS shall initiate the HTTP PUT request message and the SCEF shall respond to the message.

This method shall support request and response data structures, and response codes, as specified in the table 5.14.3.3.3.2-1.

**Table 5.10.3.3.3.2-1: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	CpInfo		1	Change information in CP parameter set(s).
Response body	Data type	Cardinality	Response codes	Remarks
	CpInfo	1	200 OK	The subscription was modified successfully. The SCEF shall return an updated subscription in the response content. CpReport may be included to provide detailed failure information for some CP sets.
	none		204 No Content	The subscription was modified successfully and no content is to be sent in the response message body.
	array(CpReport)	1..N	500 Internal Server Error	The CP parameters for all CP sets were not created successfully. CpReport is included with detailed information.
	none		307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				

**Table 5.10.3.3.3.2-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.10.3.3.2-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**5.10.3.3.3.3 PATCH**

This HTTP method is not supported for the resource.

**5.10.3.3.3.4 POST**

This HTTP method is not supported for the resource.

**5.10.3.3.3.5 DELETE**

The DELETE method allows to remove an active subscription. The SCS/AS shall initiate the HTTP DELETE request message and the SCEF shall respond to the message.

This method shall support request and response data structures, and response codes, as specified in the table 5.10.3.3.3.5-1.

**Table 5.10.3.3.3.5-1.: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The subscription was deleted successfully. The content shall be empty.
	none		307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.

**Table 5.10.3.3.3.5-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.10.3.3.3.5-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.10.3.4 Resource: Individual CP Set Provisioning

### 5.10.3.4.1 Introduction

This resource allows the SCS/AS to manage resources for CP parameter set provisioning associated with a CP parameter set Id.

### 5.10.3.4.2 Resource definition

Resource URI: **{apiRoot}/3gpp-cp-parameter-provisioning/v1/{scsAsId}/subscriptions/{subscriptionId}/cpSets/{setId}**

This resource shall support the resource URI variables defined in table 5.10.3.3.2-1.

**Table 5.10.3.3.2-1: Resource URI variables for resource "Individual CP Set Provisioning"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
subscriptionId	string	Identifier of the subscription resource.
setId	string	Identifier of the CP parameter set

### 5.10.3.4.3 Resource methods

#### 5.10.3.4.3.1 GET

The GET method allows to read a CP parameter set resource. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.10.3.4.3.1-1 and table 5.10.3.4.3.1-2.

**Table 5.10.3.4.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.10.3.4.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	CpParameterSet	1	200 OK	The subscription information related to the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	

NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.

**Table 5.10.3.4.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.10.3.4.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.10.3.4.3.2 PUT

The PUT method allows to update a CP parameter set resource. The SCS/AS shall initiate the HTTP PUT request message and the SCEF shall respond to the message.

This method shall support request and response data structures, and response codes, as specified in the table 5.10.3.4.3.2-1.

**Table 5.10.3.4.3.2-1: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	CpParameterSet	1	Change information in CP parameter set.	
Response body	Data type	Cardinality	Response codes	Remarks
	CpParameterSet	1	200 OK	The CP parameter set resource was modified successfully. The SCEF shall return an updated CP parameter set resource in the response content.
	none		204 No Content	The CP parameter set resource was modified successfully and no content is to be sent in the response message body.
	CpReport	1	409 Conflict	The CP parameters for the CP set were not updated successfully, applicable for error SET_ID_DUPLICATED in table 5.10.2.3.5-1.
	CpReport	1	500 Internal Server Error	The CP parameters for the CP set were not updated successfully, applicable for other errors in table 5.10.2.3.5-1.
	none		307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				

**Table 5.10.3.4.3.2-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.10.3.4.3.2-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.10.3.4.3.3 PATCH

This HTTP method is not supported for the resource.

## 5.10.3.4.3.4 POST

This HTTP method is not supported for the resource.

## 5.10.3.4.3.5 DELETE

The DELETE method allows to remove an active subscription. The SCS/AS shall initiate the HTTP DELETE request message and the SCEF shall respond to the message.

This method shall support request and response data structures, and response codes, as specified in the table 5.10.3.4.3.5-1.

**Table 5.10.3.4.3.5-1.: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The subscription was deleted successfully. The content shall be empty.
	none		307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				

**Table 5.10.3.4.3.5-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.10.3.4.3.5-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.10.4 Used Features

The table below defines the features applicable to the CpProvisioning API. Those features are negotiated as described in clause 5.2.7.

**Table 5.10.4-1: Features used by CpProvisioning API**

Feature Number	Feature	Description
1	ExpectedUMT_5G	The UE's expected geographical movement is supported. This feature may only be supported in 5G.
2	ExpectedUmtTime_5G	The UE's expected geographical movement with recurrence time is supported. This feature requires the ExpectedUMT_5G feature support and may only be supported in 5G.
3	ScheduledCommType_5G	Support of scheduled communication type. This feature may only be supported in 5G.
4	UEId_retrieval	This feature supports AF specific UE ID retrieval. The feature is not applicable to pre-5G (e.g. 4G).
5	ExpectedUmtTime_Add	This feature supports expected UMT days indication. This feature requires the ExpectedUmtTime_5G feature support.
6	AppExpUeBehaviour	This feature indicates the support of Application-Specific Expected UE Behaviour parameters. The feature is not applicable to pre-5G (e.g. 4G).
7	ConfAccuLevels	This feature indicates the support of confidence and accuracy levels for the parameters provisioned. The feature is not applicable to pre-5G (e.g. 4G).
Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".		
Description: A clear textual description of the feature.		

## 5.10.5 Error handling

### 5.10.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

### 5.10.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the CpProvisioning API.

### 5.10.5.3 Application Errors

The application errors defined for CpProvisioning API are listed in table 5.10.5.3-1.

**Table 5.10.5.3-1: Application errors**

Application Error	HTTP status code	Description	Applicability
REQUEST_NOT_AUTHORIZED	403 Forbidden	Indicates that the the AF specific UE ID retrieval request is not authorized.	UEId_retrieval
UE_ID_NOT_AVAILABLE	404 Not Found	Indicates that the AF specific UE ID is not available.	UEId_retrieval
UE_NOT_FOUND	404 Not Found	Indicates that the requested UE address is not found.	UEId_retrieval
CONFIDENCE_LEVEL_OUT_OF_RANGE	403 Forbidden	Confidence Level of the Expected UE Behaviour Parameter is out or range (e.g. <0.00 or >1.00)	ConfAccuLevels
ACCURACY_LEVEL_OUT_OF_RANGE	403 Forbidden	Confidence Level of the Expected UE Behaviour Parameter is out or range (e.g. <0.00 or >1.00)	ConfAccuLevels

## 5.11 PfdManagement API

### 5.11.1 Overview

The PfdManagement API allows the SCS/AS to manage the PFDs via the SCEF. The PfdManagement API defines a set of data models, resources and the related procedures for the creation and management of the PFD management request. The corresponding JSON schema for the representation of the resources and operations defined by the PfdManagement API is provided in its complete form in Annex A.11.

### 5.11.2 Data model

#### 5.11.2.1 Resource data types

##### 5.11.2.1.1 Introduction

This clause defines data structures to be used in resource representations.

Table 5.11.2.1.1-1 specifies data types re-used by the PfdManagement API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the PfdManagement API.

**Table 5.11.2.1.1-1: PfdManagement API re-used Data Types**

Data type	Reference	Comments
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.11.4-1.
Dnai	3GPP TS 29.571 [45]	DNAI

Table 5.11.2.1.1-2 specifies the data types defined for the PfdManagement API.



Table 5.11.2.1.1-2: PfdManagement API specific Data Types

Data type	Clause defined	Description	Applicability
DomainNameProtocol	5.11.2.2.4	Indicates the additional protocol and protocol field for domain names to be matched.	DomainNameP rotocol
FailureCode	5.11.2.2.3	Represents the failure reason of the PFD management.	
Pfd	5.11.2.1.4	Represents a PFD for an external Application Identifier.	
PfdData	5.11.2.1.3	Represents a PFD request to add, update or remove PFD(s) for one external application identifier.	
PfdManagement	5.11.2.1.2	Represents a PFD management resource for a PFD management request.	
PfdManagementPatch	5.11.2.1.7	Represents the parameters to request the modification of a PFD management transaction resource.	PatchUpdate
PfdReport	5.11.2.1.5	Represents a PFD report indicating the external application identifier(s) which PFD(s) are not added or modified successfully and the corresponding failure cause(s).	
UserPlaneLocationArea	5.11.2.1.6	Represents location area(s) of the user plane functions which are unable to enforce the provisioned PFD(s) successfully.	

## 5.11.2.1.2 Type: PfdManagement

This type represents a PFD management resource for a PFD management request.

Table 5.11.2.1.2-1: Definition of type PfdManagement

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
self	Link	0..1	Link to the resource "Individual PFD Management Transaction". This parameter shall be supplied by the SCEF in HTTP responses.	
supportedFeatures	SupportedFeatures	0..1	Used to negotiate the supported optional features of the API as described in clause 5.2.7. This attribute shall be provided in the POST request and in the response of successful resource creation.	
pfdDatas	map(PfdData)	1..N	Each element uniquely identifies the PFDs for an external application identifier. Each element is identified in the map via an external application identifier as key. The response shall include successfully provisioned PFD data of application(s).	
pfdReports	map(PfdReport)	0..N	Supplied by the SCEF and contains the external application identifiers for which PFD(s) are not added or modified successfully. The failure reason is also included. Each element provides the related information for one or more external application identifier(s) and is identified in the map via the failure identifier as key. (NOTE 2)	
notificationDestination	Link	0..1	A URI indicating the notification destination for T8 notifications.	PfdMgmtNotif ication
requestTestNotification	boolean	0..1	Set to true by the SCS/AS to request the SCEF to send a test notification as defined in clause 5.2.5.3. Set to false or omitted otherwise.	Notification_t est_event
websocketNotifConfig	WebsocketNotifConfig	0..1	Configuration parameters to set up notification delivery over WebSocket protocol as defined in clause 5.2.5.4.	Notification_ websocket

NOTE 1: Properties marked with a feature as defined in clause 5.11.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.

NOTE 2: The failure identifier is a string encoded map key.

## 5.11.2.1.3 Type: PfdData

This type represents a PFD request to add, update or remove PFD(s) for one external application identifier provided by the SCS/AS to the SCEF via T8 interface.

**Table 5.11.2.1.3-1: Definition of type PfdData**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
externalApplId	string	1	Each element uniquely external application identifier (NOTE 2)	
self	Link	0..1	Link to the resource "Individual Application PFD Management". This parameter shall be supplied by the SCEF in HTTP responses.	
pfd	map(Pfd)	1..N	Contains the PFDs of the external application identifier. Each PFD is identified in the map via a key containing the PFD identifier. (NOTE 3)	
allowedDelay	DurationSecRm	0..1	Indicates that the list of PFDs in this request should be deployed within the time interval indicated by the Allowed Delay	
cachingTime	DurationSecRo	0..1	SCEF supplied property, inclusion of this property means the allowed delayed cannot be satisfied, i.e. it is smaller than the caching time, but the PFD data is still stored.	
NOTE 1: Properties marked with a feature as defined in clause 5.11.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				
NOTE 2: An externalApplId can only belong to one "individual PFD Management Transaction" resource.				
NOTE 3: When multiple PFDs are associated with application identifier, the application is detected when any of the PFDs associated with the application identifier is matched.				

## 5.11.2.1.4 Type: Pfd

This data type represents a PFD for an external Application Identifier.

Table 5.11.2.1.4-1: Definition of type Pfd

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
pfdId	string	1	Identifies a PFD of an application identifier.	
flowDescriptions	array(string)	0..N	Represents a 3-tuple with protocol, server ip and server port for UL/DL application traffic. The content of the string has the same encoding as the IPFilterRule AVP value as defined in IETF RFC 6733 [46]. (NOTE 2)	
urls	array(string)	0..N	Indicates a URL or a regular expression which is used to match the significant parts of the URL. (NOTE 2)	
domainNames	array(string)	0..N	Indicates an FQDN or a regular expression as a domain name matching criteria. (NOTE 2)	
dnProtocol	DomainNameProtocol	0..1	Indicates the additional protocol and protocol field for domain names to be matched, it may only be provided when domainNames attribute is present.	DomainName Protocol
NOTE 1: Properties marked with a feature as defined in clause 5.11.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				
NOTE 2: At least one of the properties "flowDescriptions", "urls" or "domainNames" shall be included. If a PFD contains multiple filter types, the PFD is only matched when every filter type contained in the PFD has a matching value.				

### 5.11.2.1.5 Type: PfdReport

This type represents a PFD report to indicate the external application identifier(s) which PFD(s) are not added or modified successfully and corresponding failure reason.

Table 5.11.2.1.5-1: Definition of type PfdReport

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
externalAppIds	array(string)	1..N	Identifies the external application identifier(s) which PFD(s) are not added or modified successfully	
failureCode	FailureCode	1	Identifies the failure reason	
cachingTime	DurationSec	0..1	It shall be included when the allowed delayed cannot be satisfied, i.e. it is smaller than the caching time configured in fetching PFD.	
locationArea	UserPlaneLocationArea	0..1	Identifies a location area of the user plane(s) which are unable to enforce the PFD(s).	
NOTE: Properties marked with a feature as defined in clause 5.11.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

### 5.11.2.1.6 Type: UserPlaneLocationArea

This data type represents location area(s) of the user plane which is unable to enforce the provisioned PFD(s) successfully. It is sent from the SCEF to the SCS/AS.

**Table 5.11.2.1.6-1: Definition of the UserPlaneLocationArea data Type**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
locationArea	LocationArea	0..1	Identifies the network area information served by the user planes functions which are unable to enforce the provisioned PFD(s) successfully. It can be either a list of cell IDs, or a list of Tracking Areas, or civic addresses, or a geographic area, or a combination of any of the above.	
locationArea5G	LocationArea5G	0..1	Identifies the network area information served by the user planes functions which are unable to enforce the provisioned PFD(s) successfully. It can be either a list of E-UTRA cell IDs, or a list of NR cell ID, or a list of Tracking Areas, or civic addresses, or a geographic area, or a combination of any of the above.	FailureLocation_5G
dnais	array(DNAI)	0..N	Identifies a list of DNAI supported by the user plane functions which are unable to enforce the provisioned PFD(s) successfully.	FailureLocation_5G

5.11.2.1.7 Type: PfdManagementPatch

This type represents the parameters to request the modification of a PFD management transaction resource.

**Table 5.11.2.1.7-1: Definition of type PfdManagementPatch**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
pfdDatas	map(PfdData)	0..N	Each element uniquely identifies the PFDs for an external application identifier. Each element is identified in the map via an external application identifier as the key.	
notificationDestination	Link	0..1	A URI indicating the notification destination for T8 notifications.	

NOTE 1: Properties marked with a feature as defined in clause 5.11.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.

5.11.2.2 Referenced simple data types and enumerations

5.11.2.2.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses. In addition, data types and enumerations defined in clause 5.2.1 can be referenced.

5.11.2.2.2 Simple data types

The simple data types defined in table 5.11.2.2.2-1 shall be supported.

**Table 5.11.2.2.2-1: Simple data types**

Type name	Description

### 5.11.2.2.3 Enumeration: FailureCode

The enumeration FailureCode represents the failure reason of the PFD management.

**Table 5.11.2.2.3-1: Enumeration FailureCode**

Enumeration value	Description	Applicability (NOTE)
MALFUNCTION	This value indicates that something functions wrongly in PFD provisioning or the PFD provisioning does not function at all.	
RESOURCE_LIMITATION	This value indicates there is resource limitation for PFD storage.	
SHORT_DELAY	This value indicates that the allowed delay is too short and PFD(s) are not stored.	
APP_ID_DUPLICATED	The received external application identifier(s) are already provisioned.	
PARTIAL_FAILURE	The PFD(s) are not provisioned to all PCEFs/TDFs/SMFs.	PfdMgmtNotification
OTHER_REASON	Other reason unspecified.	
NOTE: Properties marked with a feature as defined in clause 5.11.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.		

### 5.11.2.2.4 Enumeration: DomainNameProtocol

**Table 5.14.2.2.4-1: Enumeration DomainNameProtocol**

Enumeration value	Description	Applicability (NOTE)
DNS_QNAME	Identifies the DNS protocol and the question name in DNS query.	
TLS_SNI	Identifies the Server Name Indication in TLS ClientHello message.	
TLS_SAN	Identifies the Subject Alternative Name in TLS ServerCertificate message.	
TSL_SCN	Identifies the Subject Common Name in TLS ServerCertificate message. (NOTE 2)	
NOTE 1: Properties marked with a feature as defined in clause 5.10.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		
NOTE 2: The enumeration value "TSL_SCN" refers to "TLS_SCN" value in domain name protocol. This enumeration value is however kept as currently defined in this specification for backward compatibility considerations.		

## 5.11.3 Resource structure

### 5.11.3.1 General

All resource URIs of this API should have the following root:

**{apiRoot}/3gpp-pfd-management/v1**

"apiRoot" is set as described in clause 5.2.4. "apiName" shall be set to "3gpp-pfd-management" and "apiVersion" shall be set to "v1" for the version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:

Table 5.11.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Meaning
PFD Management Transactions	//{scsAsId}/transactions	GET	Read all or queried PFDs for a given SCS/AS
		POST	Create PFDs for a given SCS/AS and one or more external Application Identifier(s)
Individual PFD Management Transaction	//{scsAsId}/transactions/{transactionId}	GET	Read all PFDs for a given SCS/AS and a transaction for one or more external Application Identifier(s)
		PUT	Update PFD(s) for a given SCS/AS and a transaction for one or more external Application Identifier(s)
		PATCH	Modify PFD(s) for a given SCS/AS and a transaction for one or more external Application Identifier(s).
		DELETE	Delete PFDs for a given SCS/AS and a transaction for one or more external Application Identifier(s)
Individual Application PFD Management	//{scsAsId}/transactions/{transactionId}/applications/{appld} (NOTE)	PUT	Update PFDs at individual application level
		PATCH	Update PFDs at individual application level
		GET	Read PFDs at individual application level
		DELETE	Delete PFDs at individual application level
NOTE: The appld as the resource identifier is not necessarily identical as the external application identifier received from the SCS/AS.			

### 5.11.3.2 Resource: PFD Management Transactions

#### 5.11.3.2.1 Introduction

This resource allows an SCS/AS to read all PFDs for a given SCS/AS or create PFDs for a given SCS/AS with one or more external Application Identifier(s).

#### 5.11.3.2.2 Resource definition

Resource URI: {apiRoot}/3gpp-pfd-management/v1/{scsAsId}/transactions

This resource shall support the resource URI variables defined in table 5.11.3.2.2-1.

Table 5.11.3.2.2-1: Resource URI variables for resource "PFD Management Transactions"

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.

## 5.11.3.2.3 Resource methods

## 5.11.3.2.3.1 GET

The GET method allows to read all or queried active PFDs for a given SCS/AS. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support the URI query parameters as specified in the table 5.11.3.2.3.1-0.

**Table 5.11.3.2.3.1-0: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks	Applicability
external-app-ids	array(string)	0..N	Contains the external application identifier(s) of the requested PFD data.  (NOTE)	enNB
NOTE: If multiple array elements are provided within this query parameter, then each array element shall be treated as a separate query parameter.				

This method shall support the request and response data structures, and response codes, as specified in the table 5.11.3.2.3.1-1.

**Table 5.11.3.2.3.1-1: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	array(PfdManagement)	0..N	200 OK	All or queried transactions including the PFDs for the SCS/AS in the request URI are returned.
	none		307 Temporary Redirect	Temporary redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.11.3.2.3.1-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.11.3.2.3.1-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.11.3.2.3.2 PUT

This HTTP method is not supported for the resource.

## 5.11.3.2.3.3 POST

The POST method creates new PFDs resource(s) for a given SCS/AS with one or more external Application Identifier provided by the SCS/AS. It is initiated by the SCS/AS and answered by the SCEF. The SCS/AS shall provide the external Application Identifier in the message body and upon receipt of the HTTP POST message, the SCEF shall generate the resource "Individual PFD Management Transaction" and also the sub-resource(s) "Individual Application PFD Management", the SCEF shall send these resource URI in the HTTP response to the SCS/AS.

This method shall support the request and response data structures, and response codes, as specified in the table 5.11.3.2.3.3-1.

**Table 5.11.3.2.3.3-1: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	PfdManagement	1		
Response body	Data type	Cardinality	Response codes	Remarks
	PfdManagement	1	201 Created	The PFDs resource was created successfully. PfdReport may be included to provide detailed failure information for some applications.
	array(PfdReport)	1..N	500 Internal Server Error	The PFDs for all applications were not created successfully. PfdReport is included with detailed information.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.				

**Table 5.11.3.2.3.3-2: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-pfd-management/v1/{scsAsId}/transactions/{transactionId}

## 5.11.3.2.3.4 PATCH

This HTTP method is not supported for the resource.

## 5.11.3.2.3.5 DELETE

To remove all PFDs for a given SCS/AS, the SCS/AS shall use the HTTP DELETE method on the "PFD Management Transactions" resource.

The possible response messages from the SCEF, depending on whether the DELETE request is successful or unsuccessful, are shown in table 5.11.3.2.3.5-1.

**Table 5.11.3.2.3.5-1: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	All PFDs were removed successfully. The SCEF shall not return a response content.
	none		307 Temporary Redirect	Temporary redirection, during transaction termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.



	none		308 Permanent Redirect	Permanent redirection, during transaction termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				

**Table 5.11.3.2.3.5-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.11.3.2.3.5-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

### 5.11.3.3 Resource: Individual PFD Management Transaction

#### 5.11.3.3.1 Introduction

This resource allows an SCS/AS to read, or update or delete PFDs for a given SCS/AS and a transaction Id for one or more application identifier(s) at the SCEF.

#### 5.11.3.3.2 Resource definition

Resource URI: `{apiRoot}/3gpp-pfd-management/v1/{scsAsId}/transactions/{transactionId}`

This resource shall support the resource URI variables defined in table 5.11.3.3.2-1.

**Table 5.11.3.3.2-1: Resource URI variables for resource "Individual PFD Management Transaction"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
transactionId	string	Identifier of the transaction. The transactionId corresponds to the stage 2 TLTRI.

#### 5.11.3.3.3 Resource methods

##### 5.11.3.3.3.1 GET

The GET method allows to read all PFDs for a given SCS/AS and a transaction Id generated by the SCEF. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.11.3.3.3.1-1.

**Table 5.11.3.3.3.1-1: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	PfdManagement	1	200 OK	The PFDs for the SCS/AS and the transaction Id for one or more application identifier(s) in the request URI are returned.
	none		307 Temporary Redirect	Temporary redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.11.3.3.3.1-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.11.3.3.3.1-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.11.3.3.3.2 PUT

The PUT method modifies the PFDs for a given SCS/AS and an existing transaction Id generated by the SCEF. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support the request and response data structures, and response codes, as specified in the table 5.11.3.3.3.2-1.

**Table 5.11.3.3.3.2-1: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	PfdManagement	1	Update of PFD(s) for an existing transaction Id.	
Response body	Data type	Cardinality	Response codes	Remarks
	PfdManagement	1	200 OK	The PFDs were updated successfully and a representation is returned. PfdReport may be included to provide detailed failure information for some applications.
	none		204 No Content	The PFDs were updated successfully.
	array(PfdReport)	1..N	500 Internal Server Error	The PFDs for all applications were not updated successfully. PfdReport is included with detailed information.
	none		307 Temporary Redirect	Temporary redirection, during transaction modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				

**Table 5.11.3.3.3.2-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.11.3.3.3.2-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

### 5.11.3.3.3.3 PATCH

The PATCH method modifies an existing PFD Management Transaction resource. The SCS/AS shall initiate the HTTP PATCH request message and the SCEF shall respond to the message.

This method shall support the request and response data structures, and response codes, as specified in the table 5.11.3.3.3.3-1.

**Table 5.11.3.3.3-1: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	PfdManagementPatch	1	Modify of PFD(s) for an existing transaction ID.	
Response body	Data type	Cardinality	Response codes	Remarks
	PfdManagement	1	200 OK	The PFDs were modified successfully and a representation of the modified resource is returned. The PfdReport data structure may be included in the response to provide the detailed failure information if the modification failed for some applications.
	none		204 No Content	The PFDs were modified successfully.
	array(PfdReport)	1..N	500 Internal Server Error	The PFDs for all applications were not modified successfully. PFD Report(s) shall be included in the response body with the detailed information.
	none		307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 also apply.				

**Table 5.11.3.3.3-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.11.3.3.3-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.11.3.3.3.4 POST

This HTTP method is not supported for the resource.

## 5.11.3.3.3.5 DELETE

The DELETE method deletes the PFDs for a given SCS/AS and an transaction Id generated by the SCEF. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.11.3.3.3.5-1 and table 5.11.3.3.3.5-2.

**Table 5.11.3.3.3.5-1: URI query parameters supported by the DELETE method on this resource**

Name	Data type	Cardinality	Remarks
N/A			

**Table 5.11.3.3.3.5-2: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	None		204 No Content	The PFDs for an existing transaction Id were removed successfully.
	none		307 Temporary Redirect	Temporary redirection, during transaction termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				

**Table 5.11.3.3.3.5-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.11.3.3.3.5-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.11.3.4 Resource: Individual Application PFD Management

### 5.11.3.4.1 Introduction

This resource allows an SCS/AS to read, update or remove the PFDs for a given SCS/AS and an external Application Identifier at the SCEF.

### 5.11.3.4.2 Resource definition

Resource URI: `{apiRoot}/3gpp-pfd-management/v1/{scsAsId}/transactions/{transactionId}/applications/{appId}`

This resource shall support the resource URI variables defined in table 5.11.3.4.2-1.

**Table 5.11.3.3.4-1: Resource URI variables for resource "Individual Application PFD Management"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
transactionId	string	Identifier of the transaction.
appId	string	External Application Identifier.

## 5.11.3.4.3 Resource methods

## 5.11.3.4.3.1 GET

The GET method allows to read all PFDs at individual application level. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support request and response data structures, and response codes, as specified in the table 5.11.3.4.3.1-1.

**Table 5.11.3.4.3.1-1: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	None			
Response body	Data type	Cardinality	Response codes	Remarks
	PfdData	1	200 OK	The PFDs at individual application level in the request URI are returned.
	none		307 Temporary Redirect	Temporary redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.11.3.4.3.1-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.11.3.4.3.1-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.11.3.4.3.2 PUT

The PUT method modifies the PFDs at individual application level. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support the request and response data structures, and response codes, as specified in the table 5.11.3.4.3.2-1.

Table 5.11.3.4.3.2-1: Data structures supported by the PUT request/response by the resource

Request body	Data type	Cardinality	Remarks	
	PfdData	1	Update of PFD(s) for an existing external application identifier.	
Response body	Data type	Cardinality	Response codes	Remarks
	PfdData	1	200 OK	The PFDs for the existing external application identifier were updated successfully and a representation is returned.
	none		204 No Content	The PFDs for the existing external application identifier were updated successfully.
	PfdReport	1	403 Forbidden	The PFDs for the application were not updated successfully, applicable for error SHORT_DELAY in table 5.11.2.2.3-1.
	PfdReport	1	409 Conflict	The PFDs for the application were not updated successfully, applicable for error APP_ID_DUPLICATED in table 5.11.2.2.3-1.
	PfdReport	1	500 Internal Server Error	The PFDs for the application were not updated successfully, applicable for other errors in table 5.11.2.2.3-1.
	none		307 Temporary Redirect	Temporary redirection, during transaction modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				

Table 5.11.3.4.3.2-2: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

Table 5.11.3.4.3.2-3: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

### 5.11.3.4.3.3 PATCH

The PATCH method modifies the PFDs at individual application level. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support the request and response data structures, and response codes, as specified in the table 5.11.3.4.3.3-1.

**Table 5.11.3.4.3.3-1: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	PfdData	1	Update of PFD(s) for an existing external application identifier.	
Response body	Data type	Cardinality	Response codes	Remarks
	PfdData	1	200 OK	The PFDs for the existing external application identifier were updated successfully and a representation is returned.
	none		204 No Content	The PFDs for the existing external application identifier were updated successfully.
	PfdReport	1	403 Forbidden	The PFDs for the application were not updated successfully, applicable for error SHORT_DELAY in table 5.11.2.2.3-1.
	PfdReport	1	409 Conflict	The PFDs for the application were not updated successfully, applicable for error APP_ID_DUPLICATED in table 5.11.2.2.3-1.
	PfdReport	1	500 Internal Server Error	The PFDs for the application were not updated successfully, applicable for other errors in table 5.11.2.2.3-1.
	none		307 Temporary Redirect	Temporary redirection, during transaction modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during transaction modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 also apply.				

**Table 5.11.3.4.3.3-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.11.3.4.3.3-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.11.3.4.3.4 POST

This HTTP method is not supported for the resource.

#### 5.11.3.4.3.5 DELETE

The DELETE method deletes all the PFDs at individual application level. It is initiated by the SCS/AS and answered by the SCEF.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.11.3.4.3.5-1 and table 5.11.3.4.3.5-2.



**Table 5.11.3.4.3.5-1: URI query parameters supported by the DELETE method on this resource**

Name	Data type	Cardinality	Remarks
N/A			

**Table 5.11.3.4.3.5-2: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The PFDs were removed successfully.
	none		307 Temporary Redirect	Temporary redirection, during transaction termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during transaction termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	

NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.

**Table 5.11.3.4.3.5-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.11.3.4.3.5-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.11.3.5 Void

5.11.3A Notifications

5.11.3A.1 General

The notifications provided by the PfdManagement API are specified in this clause.

**Table 5.11.3A-1: Notifications overview**

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
PFD Management Notification	{notificationDestination}	POST	Send asynchronous PFD management result.

## 5.11.3A.2 PFD Management Notification

### 5.11.3A.2.1 Description

The PFD Management Notification allows the SCEF to send notification about PFD management result to the SCS/AS, if the PFD provisioning fails within the allowed delay.

### 5.11.3A.2.2 Target URI

The Callback URI "{notificationDestination}" shall be used with the callback URI variables defined in table 5.11.3A.2.2-1.

**Table 5.11.3A.2.2-1: Callback URI variables**

Name	Data type	Definition
notificationDestination	Link	Callback reference provided by the SCS/AS during creation or modification of the PFD management transaction.

### 5.11.3A.2.3 Standard Methods

#### 5.11.3A.2.3.1 Notification via POST

The HTTP POST method reports the asynchronous PFD management result. The SCEF shall initiate the HTTP POST request message and the SCS/AS shall respond to the message.

This method shall support the request data structures specified in table 5.11.3A.2.3.1-1 and the response data structures and response codes specified in table 5.11.3A.2.3.1-2.

**Table 5.11.3A.2.3.1-1: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
PfdReport	1..N	The PFD management notification provided by the SCEF.

**Table 5.11.3A.2.3.1-2: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
none		204 No Content	The PFD management notification is received successfully.
none		307 Temporary Redirect	Temporary redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS instance where the notification should be sent. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.11.3A.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.11.3A.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

### 5.11.3A.2.3.2 Notification via Websocket

If supported by both SCS/AS and SCEF and successfully negotiated, the PfdReport may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4.

## 5.11.4 Used Features

The table below defines the features applicable to the PfdManagement API. Those features are negotiated as described in clause 5.2.7.

**Table 5.11.4-1: Features used by PfdManagement API**

Feature Number	Feature	Description
1	DomainNameProtocol	This feature supports the additional protocol matching condition for the domain name in PFD data.
2	PfdMgmtNotification	This feature supports PFD management notification.
3	Notification_websocket	The delivery of notifications over Websocket is supported according to clause 5.2.5.4. This feature requires that the Notification_test_event feature is also supported.
4	Notification_test_event	The testing of notification connection is supported according to clause 5.2.5.3.
5	FailureLocation_5G	This feature supports the notification of specific failure location area of UPF for PFD management in 5G. This feature is applicable only if PfdMgmtNotification feature is also supported. The feature supports the 5G requirement and may only be supported in 5G.
6	enNB	Indicates the support of enhancements to the northbound interfaces.
7	PatchUpdate	Indicates the support of enhancements to the northbound interfaces (e.g. support the partial modification of an existing PFD Management Transaction resource).

## 5.11.5 Error handling

### 5.11.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

### 5.11.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the PfdManagement API.

### 5.11.5.3 Application Errors

The application errors defined for PfdManagement API are listed in table 5.11.5.3-1.

**Table 5.11.5.3-1: Application errors**

Application Error	HTTP status code	Description	Applicability

## 5.12 ECRControl API

### 5.12.1 Overview

The ECRControl API is a custom API (RPC interaction) that allows the SCS/AS to query or configure the enhanced coverage restriction over 3GPP networks. The ECRControl API defines a set of data models and related custom operation procedures for the enhanced coverage restriction control request. The corresponding JSON schema for the representation of the operations defined by the ECRControl API is provided in its complete form in Annex A.12.

### 5.12.2 Data model

#### 5.12.2.1 Data types

##### 5.12.2.1.1 Introduction

This clause defines data structures to be used in the request and response.

Table 5.12.2.1.1-1 specifies data types re-used by the ECRControl API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the ECRControl API.

**Table 5.12.2.1.1-1: ECRControl API re-used Data Types**

Data type	Reference	Comments
EcRestrictionDataWb	3GPP TS 29.503 [63]	Contains the Enhance Coverage Restriction Data.
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.12.4-1.

Table 5.12.2.1.1-2 specifies the data types defined for the ECRControl API.

**Table 5.12.2.1.1-2: ECRControl API specific Data Types**

Data type	Clause defined	Description	Applicability
ECRControl	5.12.2.1.2	Represents the parameters to request Enhanced Coverage Restriction control.	
ECRData	5.12.2.1.3	Represents the current visited PLMN (if any) and the current settings of enhanced coverage restriction.	
PlmnEcRestrictionDataWb	5.12.2.1.4	Indicates whether enhanced coverage mode is restricted or not for a PLMN ID.	ECR_WB_5G

##### 5.12.2.1.2 Type: ECRControl

This type represents the Enhanced Coverage Restriction control request. The structure is used only for request.

Table 5.12.2.1.2-1: Definition of type ECRControl

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
supportedFeatures	SupportedFeatures	1	Used to negotiate the supported optional features of the API as described in clause 5.2.7.	
mtcProviderId	string	0..1	Identifier the MTC Service Provider and/or MTC Application. (NOTE 4).	
scsAsId	string	0..1	Identifier of the SCS/AS.	
externalId	ExternalId	0..1	Identifies a user as defined in Clause 4.6.2 of 3GPP TS 23.682 [2]. (NOTE 2)	
msisdN	MsisdN	0..1	Identifies the MS internal PSTN/ISDN number allocated for a UE. (NOTE 2)	
ecrDataWbs	array(PlmnEcRestrictionDataWb)	0..N	Identifies whether enhanced coverage mode are restricted or not. This attribute shall not be present for the query custom operation.	ECR_WB_5 G
restrictedPlmnIds	array(PlmnId)	0..N	Indicates a complete list (and possibly empty) of serving PLMNs where Enhanced Coverage shall be restricted. This attribute shall not be present for the query custom operation. (NOTE 3)	
allowedPlmnIds	array(PlmnId)	0..N	Indicates a complete list (and possibly empty) of serving PLMNs where Enhanced Coverage shall be allowed. This attribute shall not be present for the query custom operation. (NOTE 3)	
<p>NOTE 1: Properties marked with a feature as defined in clause 5.4.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.</p> <p>NOTE 2: One of the properties "externalId" or "msisdN" shall be included.</p> <p>NOTE 3: "restrictedPlmnIds" and "allowedPlmnIds" shall be mutually exclusive.</p> <p>NOTE 4: The SCEF should check received MTC provider identifier and then the SCEF may:</p> <ul style="list-style-type: none"> <li>- override it with local configured value and send it to HSS;</li> <li>- send it directly to the HSS; or</li> <li>- reject the Enhanced Coverage Restriction control request</li> </ul>				

### 5.12.2.1.3 Type: ECRData

This data type represents the current visited PLMN (if any) and the current settings of enhanced coverage restriction. The structure is used only for response.

**Table 5.12.2.1.3-1: Definition of type ECRData**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
supportedFeatures	SupportedFeatures	1	Used to negotiate the supported optional features of the API as described in clause 5.2.7.	
visitedPlmnId	PlmnId	0..1	Indicates the current visited PLMN.	
ecrDataWbs	array(PlmnEcRestrictionDataWb)	0..N	Identifies whether enhanced coverage mode are restricted or not.	ECR_WB_5G
restrictedPlmnIds	array(PlmnId)	0..N	Indicates a complete list (and possibly empty) of serving PLMNs where Enhanced Coverage shall be restricted. (NOTE 2)	
allowedPlmnIds	array(PlmnId)	0..N	Indicates a complete list (and possibly empty) of serving PLMNs where Enhanced Coverage shall be allowed. (NOTE 2)	
NOTE 1: Properties marked with a feature as defined in clause 5.4.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				
NOTE 2: "restrictedPlmnIds" and "allowedPlmnIds" shall be mutually exclusive.				

#### 5.12.2.1.4 Type: PlmnEcRestrictionDataWb

**Table 5.12.2.1.4-1: Definition of type PlmnEcRestrictionDataWb**

Attribute name	Data type	Cardinality	Description	Applicability
plmnId	PlmnId	1	Indicates the PLMN where enhanced coverage mode shall be restricted or not.	
plmnEcrDataWb	EcRestrictionDataWb	0..1	Identifies whether enhanced coverage mode are restricted or not.	

### 5.12.3 Custom Operations without associated resources

#### 5.12.3.1 Overview

Custom operations used for this API are summarized in table 5.12.3.1-1. "apiRoot" is set as described in clause 5.2.4.

**Table 5.12.3.1-1: Custom operations without associated resources**

Operation name	Custom operation URI	Mapped HTTP method	Description
query	/query	POST	Query the status of enhanced coverage restriction for a UE
configure	/configure	POST	Configure the enhanced coverage restriction for a UE

#### 5.12.3.2 Operation: query

##### 5.12.3.2.1 Description

This custom operation allows an SCS/AS to query the current status of enhanced coverage restriction for a UE via the T8 interface as defined in 3GPP TS 23.682 [2].

##### 5.12.3.2.2 Operation Definition

This operation shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.12.3.2.2-1 and table 5.12.3.2.2-2.

**Table 5.12.3.2.2-1: URI query parameters supported by the POST on this operation**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.12.3.2.2-2: Data structures supported by the POST request/response on this operation**

Request body	Data type	Cardinality	Remarks	
	ECRControl	1	Parameters to query the current status of Enhanced Coverage Restriction.	
Response body	Data type	Cardinality	Response codes	Remarks
	ECRData	1	200 OK	The requested information was returned successfully.
	none		307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.				
NOTE 2: Failure cases are described in clause 5.12.5.3.				

**Table 5.12.3.2.2-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.12.3.2.2-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

### 5.12.3.3 Operation: configure

#### 5.12.3.3.1 Description

This custom operation allows an SCS/AS to configure the current setting of enhanced coverage restriction for a UE via the T8 interface as defined in 3GPP TS 23.682 [2].

## 5.12.3.3.2 Operation Definition

This operation shall support the request data structures specified in table 5.12.3.3.2-1 and the response data structure and response codes specified in table 5.12.3.3.2-2.

**Table 5.12.3.3.2-1: URI query parameters supported by the POST on this operation**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.12.3.3.2-2: Data structures supported by the POST request/response on this operation**

Request body	Data type	Cardinality	Remarks	
	ECRControl	1	Parameters to configure the setting of Enhanced Coverage Restriction.	
Response body	Data type	Cardinality	Response codes	Remarks
	ECRData	1	200 OK	The Enhanced Coverage Restriction setting was configured successfully
	none		307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)

NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.  
NOTE 2: Failure cases are described in clause 5.12.5.3.

**Table 5.12.3.3.2-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.12.3.3.2-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.12.4 Used Features

The table below defines the features applicable to the ECRControl API. Those features are negotiated as described in clause 5.2.7.



**Table 5.12.4-1: Features used by ECRControl API**

Feature Number	Feature	Description
1	ECR_WB_5G	The enhanced coverage restriction control information indicates whether the enhanced coverage modes are restricted or not for the WB UE. The feature is not applicable to the pre-5G.
Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".		
Description: A clear textual description of the feature.		

## 5.12.5 Error handling

### 5.12.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

### 5.12.5.2 Protocol Errors

In this release of the specification, there are no additional protocol errors applicable for the ECRControl API.

### 5.12.5.3 Application Errors

The application errors defined for the ECRControl API are listed in table 5.12.5.3-1.

**Table 5.12.5.3-1: Application errors**

Application Error	HTTP status code	Description
QUOTA_EXCEEDED	403 Forbidden	Not enough quota for SCS/AS.

## 5.13 NpConfiguration API

### 5.13.1 Overview

The NpConfiguration API is a RESTful API that allows the SCS/AS to send suggested network parameters to influence certain aspects of UE/network behaviour such as the UE's PSM, extended idle mode DRX, and extended buffering configurations. The NpConfiguration API defines a set of data models, resources and the related procedures for the creation and management of the network parameter configuration. The corresponding JSON schema for the representation of the resources and operations defined by the NpConfiguration API is provided in its complete form in Annex A.13.

### 5.13.2 Data model

#### 5.13.2.1 Resource data types

##### 5.13.2.1.1 Introduction

This clause defines data structures to be used in resource representations.

Table 5.13.2.1.1-1 specifies data types re-used by the NetworkParameterConfiguration API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the NetworkParameterConfiguration API.

**Table 5.13.2.1.1-1: NetworkParameterConfiguration API re-used Data Types**

Data type	Reference	Comments
Dnn	3GPP TS 29.571 [45]	Identifies a DNN.
IpAddr	3GPP TS 29.571 [45]	UE IP Address.
MacAddr48	3GPP TS 29.571 [45]	MAC Address.
Snssai	3GPP TS 29.571 [45]	Identifies an S-NSSAI.
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.13.4-1.

Table 5.13.2.1.1-2 specifies the data types defined for the NpConfiguration API.

**Table 5.13.2.1.1-2: NpConfiguration API specific Data Types**

Data type	Clause defined	Description	Applicability
ConfigurationNotification	5.13.2.1.4	Represents a configuration result notification.	
NpConfiguration	5.13.2.1.2	Represents a network parameters configuration.	
NpConfigurationPatch	5.13.2.1.3	Represents parameters used to request the modification of a network parameters configuration resource.	

#### 5.13.2.1.2 Type: NpConfiguration

This type represents a configuration of network parameters. The same structure is used in the configuration request and response.

**Table 5.13.2.1.2-1: Definition of type NpConfiguration**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 2)
self	Link	0..1	Link to the resource "Individual NP Configuration". This parameter shall be supplied by the SCEF in HTTP responses.	
supportedFeatures	SupportedFeatures	0..1	Used to negotiate the supported optional features of the API as described in clause 5.2.7. This attribute shall be provided in the POST request and in the response of successful resource creation.	
mtcProviderId	string	0..1	Identifies the MTC Service Provider and/or MTC Application. (NOTE 4)	
dnn	Dnn	0..1	Identifies a DNN, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only.	UEId_retrieval
externalId	ExternalId	0..1	Identifies a user as defined in Clause 4.6.2 of 3GPP TS 23.682 [2]. The attribute may also be present in the NP configuration response message, if the "UEId_retrieval" feature is supported and the corresponding request message includes the "ueIpAddr" attribute or the "ueMacAddr" attribute. (NOTE 1)	
msisdn	Msisdn	0..1	Identifies the MS internal PSTN/ISDN number allocated for a UE. (NOTE 1)	
externalGroupId	ExternalGroupId	0..1	Identifies a user group as defined in Clause 4.6.2 of 3GPP TS 23.682 [2]. (NOTE 1)	
maximumLatency	DurationSec	0..1	This parameter may be included to identify the maximum delay acceptable for downlink data transfers.	
maximumResponseTime	DurationSec	0..1	This parameter may be included to identify the length of time for which the UE stays reachable to allow the SCS/AS to reliably deliver the required downlink data.	
suggestedNumberOfDIPackets	integer	0..1	This parameter may be included to identify the number of packets that the serving gateway shall buffer in case that the UE is not reachable.	
groupReportingGuardTime	DurationSec	0..1	Identifies the time for which the SCEF can aggregate the reports detected by the UEs in a group and report them together to the SCS/AS, as specified in clause 5.6.0 of 3GPP TS 23.682 [2].	
notificationDestination	Link	0..1	A URI indicating the notification destination where T8 notification requests shall be delivered. The attribute shall be provided if the attribute "externalGroupId" is provided.	
requestTestNotification	boolean	0..1	Set to true by the SCS/AS to request the SCEF to send a test notification as defined in clause 5.2.5.3. Set to false or omitted otherwise. The attribute may only be provided if the attribute "externalGroupId" is provided.	Notification_test_event
websocketNotificationConfig	WebsocketNotificationConfig	0..1	Configuration parameters to set up notification delivery over WebSocket protocol as defined in clause 5.2.5.4. The attribute may only be provided if the attribute "externalGroupId" is provided.	Notification_websocket
validityTime	DateTime	0..1	Identifies when the network parameter expires and shall be deleted locally if it expires. The attribute is only applicable in 5G. (NOTE 3)	NpExpiry_5G
snssai	Snssai	0..1	Indicate the S-NSSAI.	UEId_retrieval
ueIpAddr	IpAddr	0..1	UE IP address.	UEId_retrieval
ueMacAddr	MacAddr48	0..1	UE MAC address.	UEId_retrieval

NOTE 1: Only one of the properties "externalId", "msisdn" or "externalGroupId" shall be included.
NOTE 2: Properties marked with a feature as defined in clause 5.13.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.
NOTE 3: If this attribute is omitted, no expiry for network parameter configuration applies.
NOTE 4: The SCEF should check received MTC provider identifier and then the SCEF may: <ul style="list-style-type: none"> <li>- override it with local configured value and send it to HSS;</li> <li>- send it directly to the HSS; or</li> <li>- reject the network parameter configuration request.</li> </ul>

### 5.13.2.1.3 Type: NpConfigurationPatch

This type represents a configuration of network parameters provided by the SCS/AS to the SCEF. The structure is used for HTTP PATCH request.

**Table 5.13.2.1.3-1: Definition of type NpConfigurationPatch**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
maximumLatency	DurationSecRm	0..1	This parameter may be included to identify the maximum delay acceptable for downlink data transfers.	
maximumResponseTime	DurationSecRm	0..1	This parameter may be included to identify the length of time for which the UE stays reachable to allow the SCS/AS to reliably deliver the required downlink data.	
suggestedNumberOfDIPackets	integer	0..1	This parameter may be included to identify the number of packets that the serving gateway shall buffer in case that the UE is not reachable.	
groupReportGuardTime	DurationSecRm	0..1	Identifies the time for which the SCEF can aggregate the reports detected by the UEs in a group and report them together to the SCS/AS, as specified in clause 5.6.0 of 3GPP TS 23.682 [2].	
validityTime	DateTimeRm	0..1	Identifies when the network parameter expires and shall be deleted locally if it expires. The attribute is only applicable in 5G.	NpExpiry_5G
notificationDestination	Link	0..1	A URI indicating the notification destination where T8 notification requests shall be delivered.	
NOTE: Properties marked with a feature as defined in clause 5.13.4 are applicable as described in clause 5.2.7. If no feature are indicated, the related property applies for all the features.				

### 5.13.2.1.4 Type: ConfigurationNotification

This type represents a configuration result notification.

**Table 5.13.2.1.4-1: Definition of the ConfigurationNotification data type**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
configuration	Link	1	Link to the configuration resource to which this notification is related.	
configResults	array(ConfigResult)	0..N	Each element identifies a notification of grouping configuration result.	
appliedParam	AppliedParameterConfiguration	0..1	Indicates the applied parameter configuration in the network. The "maximumDetectionTime" attribute in AppliedParameterConfiguration data type is not applicable for Network Parameter configuration.	Enhanced_param_config
NOTE: Properties marked with a feature as defined in clause 5.13.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				

## 5.13.3 Resource structure

### 5.13.3.1 General

All resource URIs of this API should have the following root:

**{apiRoot}/3gpp-network-parameter-configuration/v1**

"apiRoot" is set as described in clause 5.2.4. "apiName" shall be set to "3gpp-network-parameter-configuration" and "apiVersion" shall be set to "v1" for the version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:

**Table 5.13.3.1-1: Resources and methods overview**

Resource name	Resource URI	HTTP method	Meaning
NP Configurations	//{scsAsId}/configurations	GET	Read all NP configurations for a given SCS/AS
		POST	Create a new NP configuration
Individual NP Configuration	//{scsAsId}/configurations/{configurationId}	PUT	Replace all of the properties in an existing NP configuration
		PATCH	Modify some properties in an existing NP configuration
		GET	Read an existing NP configuration
		DELETE	Delete a NP configuration

### 5.13.3.2 Resource: NP Configurations

#### 5.13.3.2.1 Introduction

This resource allows an SCS/AS to read all active network parameter configurations or create a new configuration to configure network parameters.

#### 5.13.3.2.2 Resource definition

Resource URI: **{apiRoot}/3gpp-network-parameter-configuration/v1/{scsAsId}/configurations**

This resource shall support the resource URI variables defined in table 5.13.3.2.2-1.

**Table 5.13.3.2.2-1: Resource URI variables for resource "NP Configurations"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.

#### 5.13.3.2.3 Resource methods

##### 5.13.3.2.3.1 GET

The GET method allows to read all active configurations indicated by the resource URI as defined in clause 5.13.3.2.2. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.13.3.2.3.1-1 and table 5.13.3.2.3.1-2.

**Table 5.13.3.2.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.13.3.2.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	array(NpConfiguration)	0..N	200 OK	The NP configuration information related to the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.13.3.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.13.3.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.13.3.2.3.2 PUT

This HTTP method is not supported for the resource.

5.13.3.2.3.3 PATCH

This HTTP method is not supported for the resource.

5.13.3.2.3.4 POST

The POST method creates a new configuration resource for a given SCS/AS. The SCS/AS shall initiate the HTTP POST request message and the SCEF shall respond to the message. The SCEF shall construct the URI of the created resource.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.13.3.2.3.4-1 and table 5.13.3.2.3.4-2.

**Table 5.13.3.2.3.4-1: URI query parameters supported by the POST method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.13.3.2.3.4-2: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	NpConfiguration	1	Parameters to create a new configuration to configure network parameters with the SCEF.	
Response body	Data type	Cardinality	Response codes	Remarks
	NpConfiguration	1	201 Created	The configuration was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)
	ProblemDetails	0..1	404 Not Found	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.				
NOTE 2: Failure cases are described in clause 5.13.5.3.				

**Table 5.13.3.2.3.4-3: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-network-parameter-configuration/v1/{scsAsId}/configurations/{configurationId}

#### 5.13.3.2.3.5 DELETE

This HTTP method is not supported for the resource.

### 5.13.3.3 Resource: Individual NP Configuration

#### 5.13.3.3.1 Introduction

This resource allows an SCS/AS to query, update and delete a network parameter configuration indicated by the resource URI as defined in clause 5.13.3.3.2.

#### 5.13.3.3.2 Resource definition

Resource URI: {apiRoot}/3gpp-network-parameter-configuration/v1/{scsAsId}/configurations/{configurationId}

This resource shall support the resource URI variables defined in table 5.13.3.3.2-1.

**Table 5.13.3.2.2-1: Resource URI variables for resource "Individual NP Configuration"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.
configurationId	string	Identifier of the configuration resource.



## 5.13.3.3.3 Resource methods

## 5.13.3.3.3.1 GET

The GET method allows to read an active configuration indicated by the resource URI as defined in subclause 5.13.3.3.2. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.13.3.3.3.1-1 and table 5.13.3.3.3.1-2.

**Table 5.13.3.3.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks

**Table 5.13.3.3.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	NpConfiguration	1	200 OK	The configuration information related to the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.13.3.3.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.13.3.3.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.13.3.3.3.2 PUT

The PUT method modifies an existing configuration indicated by the resource URI as defined in clause 5.13.3.3.2. The SCS/AS shall initiate the HTTP PUT request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.13.3.3.3.2-1 and table 5.13.3.3.3.2-2.

**Table 5.13.3.3.2-1: URI query parameters supported by the PUT method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.13.3.3.2-2: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	NpConfiguration	1	Update of network parameter(s) for an existing Configuration.	
Response body	Data type	Cardinality	Response codes	Remarks
	NpConfiguration	1	200 OK	The resource was updated successfully. The SCEF shall return an updated Configuration information in the response.
	none		204 No Content	The resource was updated successfully.
	none		307 Temporary Redirect	Temporary redirection, during configuration modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during configuration modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)

NOTE 1: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.  
NOTE 2: Failure cases are described in clause 5.13.5.3.

**Table 5.13.3.3.2-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.13.3.3.2-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

### 5.13.3.3.3 PATCH

The PATCH method shall be used to update some properties in an existing configuration indicated by the Resource URI as defined in clause 5.13.3.3.2. The SCS/AS shall initiate the HTTP PATCH request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.13.3.3.3-1 and table 5.13.3.3.3-2.

**Table 5.13.3.3.3-1: URI query parameters supported by the PATCH method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.13.3.3.3-2: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	NpConfigurationPatch	1	Partial update an existing network parameter configuration.	
Response body	Data type	Cardinality	Response codes	Remarks
	NpConfiguration	1	200 OK	The configuration was updated successfully. The SCEF shall return an updated configuration information in the response.
	none		204 No Content	The configuration was updated successfully.
	none		307 Temporary Redirect	Temporary redirection, during configuration modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during configuration modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)

NOTE 1: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 also apply.  
NOTE 2: Failure cases are described in clause 5.13.5.3.

**Table 5.13.3.3.3-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.13.3.3.3-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.13.3.3.3.4 POST

This HTTP method is not supported for the resource.

#### 5.13.3.3.3.5 DELETE

The DELETE method deletes an existing configuration resource "Individual NP Configuration". The SCS/AS shall initiate the HTTP DELETE request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.13.3.3.3.5-1 and table 5.13.3.3.3.5-2.

**Table 5.13.3.3.3.5-1: URI query parameters supported by the DELETE method on this resource**

Name	Data type	Cardinality	Remarks
N/A			

**Table 5.13.3.3.3.5-2: Data structures supported by the DELETE request/response on the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	array(ConfigResult)	1..N	200 OK	The configuration was terminated successfully, the configuration failure information for group members shall be included if received.
	none		204 No Content	The configuration was terminated successfully. The response body shall be empty.
	none		307 Temporary Redirect	Temporary redirection, during configuration termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during configuration termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF.  Redirection handling is described in clause 5.2.10.	
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				

**Table 5.13.3.3.3.5-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.13.3.3.3.5-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.13.3.4 Void

### 5.13.3A Notifications

#### 5.13.3A.1 General

The notifications provided by the NpConfiguration API are specified in this clause.

**Table 5.13.3A-1: Notifications overview**

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Configuration Notification	{notificationDestination}	POST	Report a grouping configuration result from the SCEF to the SCS/AS

## 5.13.3A.2 Configuration Notification

### 5.13.3A.2.1 Description

The Configuration Notification allows the SCEF to send notifications about grouping configuration result to the SCS/AS.

### 5.13.3A.2.2 Target URI

The Callback URI "{notificationDestination}" shall be used with the callback URI variables defined in table 5.13.3a.2.2-1.

**Table 5.13.3A.2.2-1: Callback URI variables**

Name	Data type	Definition
notificationDestination	Link	Callback reference provided by the SCS/AS during creation or modification of the NP configuration subscription.

### 5.13.3A.2.3 Standard Methods

#### 5.13.3A.2.3.1 Notification via POST

The HTTP POST method reports the grouping configuration results for a NP configuration subscription. The SCEF shall initiate the HTTP POST request message and the SCS/AS shall respond to the message.

This method shall support the request data structures specified in table 5.13.3A.2.3.1-1 and the response data structures and response codes specified in table 5.13.3A.2.3.1-2.

**Table 5.13.3A.2.3.1-1: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
ConfigurationNotification	1	The grouping configuration result notification provided by the SCEF.

**Table 5.13.3A.2.3.1-2: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
none		204 No Content	The notification is received successfully.
none		307 Temporary Redirect	Temporary redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.13.3A.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.13.3A.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

#### 5.13.3a.2.3.2 Notification via Websocket

If supported by both SCS/AS and SCEF and successfully negotiated, the ConfigurationNotification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4.

## 5.13.4 Used Features

The table below defines the features applicable to the NpConfiguration API. Those features are negotiated as described in clause 5.2.7.

**Table 5.13.4-1: Features used by NpConfiguration API**

Feature Number	Feature	Description
1	Notification_websocket	The delivery of notifications over Websocket is supported according to clause 5.2.5.4. This feature requires that the Notification_test_event feature is also supported.
2	Notification_test_event	The testing of notification connection is supported according to clause 5.2.5.3.
3	NpExpiry_5G	The network parameter expiry is supported. This feature may only be supported in 5G.
4	Enhanced_param_config	This feature supports the co-existence of multiple event configurations for target UE(s) if there are parameters affecting periodic RAU/TAU timer and/or Active Time.
5	UEId_retrieval	This feature supports AF specific UE ID retrieval. The feature is not applicable to pre-5G (e.g. 4G).

Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".  
Description: A clear textual description of the feature.

## 5.13.5 Error handling

### 5.13.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

### 5.13.5.2 Protocol Errors

In this release of the specification, there are no additional protocol errors applicable for the NpConfiguration API.

### 5.13.5.3 Application Errors

The application errors defined for the NpConfiguration API are listed in table 5.13.5.3-1.

**Table 5.13.5.3-1: Application errors**

Application Error	HTTP status code	Description	Applicability
PARAMETER_OUT_OF_RANGE	403 Forbidden	Indicates that the resource is not allowed to be created since one or more of the received parameters are out of range defined by operator policies.	
REQUEST_NOT_AUTHORIZED	403 Forbidden	Indicates that the AF specific UE ID retrieval request is not authorized.	UEId_retrieval
UE_ID_NOT_AVAILABLE	404 Not Found	Indicates that the AF specific UE ID is not available.	UEId_retrieval
UE_NOT_FOUND	404 Not Found	Indicates that the requested UE address is not found.	UEId_retrieval

## 5.14 AsSessionWithQoS API

### 5.14.1 Overview

The AsSessionWithQoS API is a RESTful API that allows the SCS/AS to set up a session with SCEF with required QoS based on the application and service requirement. The AsSessionWithQoS API defines a set of data models, resources and the related procedures for the creation and management of the AS sessions with required QoS. The corresponding JSON schema for the representation of the resources and operations defined by the AsSessionWithQoS API is provided in its complete form in Annex A.14.

### 5.14.2 Data model

#### 5.14.2.1 Resource data types

##### 5.14.2.1.1 Introduction

This clause defines data structures to be used in resource representations, including subscription resources.

Table 5.14.2.1.1-1 specifies data types re-used by the AsSessionWithQoS API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the AsSessionWithQoS API.

**Table 5.14.2.1.1-1: AsSessionWithQoS API re-used Data Types**



Data type	Reference	Comments	Applicability
AcceptableServiceInfo	3GPP TS 29.514 [52]	Acceptable maximum requested bandwidth.	
AlternativeServiceRequirementsData	3GPP TS 29.514 [52]	Contains alternative QoS related parameters and a reference to them.	
AverWindow	3GPP TS 29.571 [45]	Averaging Window.	EnQoSMon
AverWindowRm	3GPP TS 29.571 [45]	This data type is defined in the same way as the "AverWindow" data type, but with the OpenAPI "nullable: true" property.	EnQoSMon
BatOffsetInfo	3GPP TS 29.514 [52]	Contains the offset of the BAT and the optionally adjusted periodicity.	EnTSCAC
BitRate	3GPP TS 29.571 [45]	String representing a bit rate that shall be formatted as follows: Pattern: '^d+(\.d+)?(bps Kbps Mbps Gbps Tbps)\$' Examples: "125 Mbps", "0.125 Gbps", "125000 Kbps"	EnQoSMon, ListUE_5G Multimedia,
BitRateRm	3GPP TS 29.571 [45]	This data type is defined in the same way as the "BitRate" data type, but with the OpenAPI "nullable: true" property.	EnQoSMon, ListUE_5G Multimedia,
Dnn	3GPP TS 29.571 [45]	Identifies a DNN.	
DurationMilliSec	3GPP TS 29.514 [52]	Indicates the time interval in units of milliseconds.	PowerSaving
DurationMilliSecRm	3GPP TS 29.514 [52]	This data type is defined in the same way as the "DurationMilliSec" data type, but with the OpenAPI "nullable: true" property.	PowerSaving
EthFlowDescription	3GPP TS 29.514 [52]	Defines a packet filter for an Ethernet flow.(NOTE 1)	EthAsSessionQoS_5G, GMEC
EventsSubscReqData	3GPP TS 29.514 [52]	Identifies the events the application subscribes to.	EnQoSMon
EventsSubscReqDataRm	3GPP TS 29.514 [52]	This data type is defined in the same way as the "EventsSubscReqData" data type, but with the OpenAPI "nullable: true" property	EnQoSMon
ExtMaxDataBurstVol	3GPP TS 29.571 [45]	Unsigned integer indicating Maximum Data Burst Volume (see clauses 5.7.3.7 and 5.7.4 of 3GPP TS 23.501 [8]), expressed in Bytes. Minimum = 4096. Maximum = 2000000.	
ExtMaxDataBurstVolRm	3GPP TS 29.571 [45]	This data type is defined in the same way as the "ExtMaxDataBurstVol" data type, but with the OpenAPI "nullable: true" property.	
ExternalGroupld	5.2.1.3.2	Represents an external group identifier.	GMEC
Gpsi	3GPP TS 29.571 [45]	Represents a GPSI.	GMEC
IpAddr	3GPP TS 29.571 [45]	UE IP Address.	ListUE_5G
MacAddr48	3GPP TS 29.571 [45]	MAC Address.	EthAsSessionQoS_5G, enNB
MediaType	3GPP TS 29.514 [52]	Indicates the media type of a single-modal data flow of a multi-modal service.	MultiMedia

MultiModalId	3GPP TS 29.514 [52]	Represents multi-modal service identifier.	MultiMedia
PacketDelBudget	3GPP TS 29.571 [45]	Unsigned integer indicating Packet Delay Budget (see clauses 5.7.3.4 and 5.7.4 of 3GPP TS 23.501 [8]), expressed in milliseconds. Minimum = 1.	TSC_5G, RTLatency
PacketDelBudgetRm	3GPP TS 29.571 [45]	This data type is defined in the same way as the "PacketDelBudget" data type, but with the OpenAPI "nullable: true" property.	TSC_5G, RTLatency
PacketErrRate	3GPP TS 29.571 [45]	String representing Packet Error Rate (see clauses 5.7.3.5 and 5.7.4 of 3GPP TS 23.501 [8]), expressed as a " <i>scalar</i> x 10- <i>k</i> " where the scalar and the exponent <i>k</i> are each encoded as one decimal digit. Pattern: '^[0-9]E-[0-9]\$'  Examples: Packer Error Rate 4x10 <sup>-6</sup> shall be encoded as "4E-6". Packer Error Rate 10 <sup>-2</sup> shall be encoded as "1E-2".	ExtQoS_5G
PacketErrRateRm	3GPP TS 29.571 [45]	This data type is defined in the same way as the "PacketErrRate" data type, but with the OpenAPI "nullable: true" property.	ExtQoS_5G
PdvMonitoringReport	3GPP TS 29.514 [52]	Represents a PDV monitoring report.	EnQoSMon
PeriodicityInfo	3GPP TS 29.514 [52]	Indicates the time period between the start of the two data bursts in Uplink and/or Downlink direction.	PowerSaving
PduSetQosPara	3GPP TS 29.571 [45]	Represents the PDU Set level QoS parameters.	PDUSetHandling
PduSetQosParaRm	3GPP TS 29.571 [45]	Represents the PDU Set level QoS parameters to be modified.	PDUSetHandling
PlmnlidNid	3GPP TS 29.571 [45]	Identifies the network: the PLMN Identifier (the mobile country code and the mobile network code) or the SNPN Identifier (the PLMN Identifier and the NID).	enNB_5G
Port	5.2.1.3.2	Unsigned integer with valid values between 0 and 65535 representing a port.	ListUE_5G
ProblemDetails	5.2.1.2.12	Problem Details when returning an error response.	
ProtocolDescription	3GPP TS 29.571 [45]	Represents Protocol description of the media flow	PDUSetHandling PowerSaving
ProtocolDescriptionRm	3GPP TS 29.571 [45]	Represents the same as the "ProtocolDescription" data type, but with the OpenAPI "nullable: true" property.	PDUSetHandling PowerSaving
RatType	3GPP TS 29.571 [45]	Identifies the RAT Type.	enNB_5G
ReportingFrequency	3GPP TS 29.512 [8]	Indicates the frequency for the reporting, such as event triggered and/or periodic. (NOTE 2)	

RequestedQosMonitoringParameter	3GPP TS 29.512 [8]	Indicates the QoS information to be measured, e.g.UL packet delay, DL packet delay or round trip packet delay between the UE and the UPF is to be monitored when the QoS Monitoring for packet delay is enabled for the service data flow. (NOTE 2)	
RttFlowReference	3GPP TS 29.514 [52]	Identifies which Application Session Media Components contribute to the RT Latency requirement for two service data flows.	RTLatency
RttFlowReferenceRm	3GPP TS 29.514 [52]	This data type is defined in the same way as the "RttFlowReference" data type, but with the OpenAPI "nullable: true" property.	RTLatency
ServAuthInfo	3GPP TS 29.514 [52]	The authorization result of a request for QoS / QoS monitoring.	EnQoSMon
Snssai	3GPP TS 29.571 [45]	Identifies the S-NSSAI.	
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.14.4-1.	
TemporalInvalidity	3GPP TS 29.565 [72]	Represents the temporal invalidity related information.	GMEC
TscInputContainer	3GPP TS 29.514 [52]	TSCAI Input information container.	TSC_5G, MultiMedia, GMEC
TscPriorityLevel	3GPP TS 29.514 [52]	Represents priority of TSC Flows.	TSC_5G
TscPriorityLevelRm	3GPP TS 29.514 [52]	Represents the same as the TscPriorityLevel data type, but with the OpenAPI "nullable: true" property.	TSC_5G
UInteger	3GPP TS 29.571 [45]	Unsigned Integer, i.e. only value 0 and integers above 0 are permissible. Minimum = 0.	
UIntegerRm	3GPP TS 29.571 [45]	This data type is defined in the same way as the "UInteger" data type, but with the OpenAPI "nullable: true" property.	
UplinkDownlinkSupport	3GPP TS 29.514 [52]	Provides L4S support information.	L4S, GMEC
NOTE 1: In order to support a set of MAC addresses with a specific range in the traffic filter, feature MacAddressRange_5G as specified in clause 5.14.4 shall be supported. NOTE 2: In order to support QoS Monitoring, feature QoSMonitoring_5G as specified in clause 5.14.4 shall be supported.			

Table 5.14.2.1.1-2 specifies the data types defined for the AsSessionWithQoS API.

Table 5.14.2.1.1-2: AsSessionWithQoS API specific Data Types

Data type	Clause defined	Description	Applicability
AdditionInfoAsSessionWithQos	5.14.2.1.11	Describes additional error information specific for this API.	
AsSessionWithQoSSubscription	5.14.2.1.2	Represents an individual AS session with required QoS subscription resource.	
AsSessionWithQoSSubscriptionPatch	5.14.2.1.3	Represents parameters to modify an AS session with specific QoS subscription.	
AsSessionMediaComponent	5.14.2.1.13	Represents media component data for a multi-modal service. It contains service data flow information for a single modal data flow of a multi-modal service.	MultiMedia
AsSessionMediaComponentRm	5.14.2.1.14	Represents the same as the AsSessionMediaComponent data type but with the "nullable: true" property.	MultiMedia
MultiModalFlows	5.14.2.1.15	Represents flow information within a single-modal data flow for a multi-modal service.	MultiMedia
ProblemDetailsAsSessionWithQoS	5.14.2.1.12	ProblemDetails as defined in clause 5.2.12.12 extended with specific error information for this API, as described in AdditionInfoAsSessionWithQos.	
QosMonitoringInformation	5.14.2.1.6	Represents QoS monitoring information.	QoSMonitoring_5G, ListUE_5G
QosMonitoringInformationRm	5.14.2.1.7	Represents the same as the QosMonitoringInformation data type but with the "nullable: true" property. The "nullable: true" property is applicable only if the "EnQoSMon" feature is supported.	QoSMonitoring_5G, ListUE_5G
QosMonitoringReport	5.14.2.1.8	Represents a QoS monitoring report.	QoSMonitoring_5G, ListUE_5G
TscQosRequirement	5.14.2.1.9	Represents QoS requirements for time sensitive communication.	TSC_5G, GMEC
TscQosRequirementRm	5.14.2.1.10	Represents the same as the TscQosRequirement data type but with the "nullable: true" property.	TSC_5G, , GMEC
UserPlaneEvent	5.14.2.2.3	Represents the user plane event.	enNB, GMEC
UserPlaneEventReport	5.14.2.1.5	Represents an event report for user plane.	enNB, GMEC
UserPlaneNotificationData	5.14.2.1.4	Represents the parameters to be conveyed in a user plane event(s) notification.	enNB, GMEC
UeAddInfo	5.14.2.1.16	Represents the UE address information.	ListUE_5G

#### 5.14.2.1.2 Type: AsSessionWithQoSSubscription

This type represents an AS session request with specific QoS for the service provided by the SCS/AS to the SCEF via T8 interface. The structure is used for subscription request and response.

**Table 5.14.2.1.2-1: Definition of type AsSessionWithQoSSubscription**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
self	Link	0..1	Link to the resource "Individual AS Session with Required QoS Subscription". This parameter shall be supplied by the SCEF in HTTP responses.	
dnn	Dnn	0..1	Identifies a DNN, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only. (NOTE 3)	
snsai	Snsai	0..1	Identifies an S-NSSAI. (NOTE 3)	
supportedFeatures	SupportedFeatures	0..1	Used to negotiate the supported optional features of the API as described in clause 5.2.7. This attribute shall be provided in the POST request and in the response of successful resource creation.	
notificationDestination	Link	1	Contains the URL to receive the notification bearer level event(s) from the SCEF.	
extApplId	string	0..1	Identifies the external Application Identifier. (NOTE 2) (NOTE 8) (NOTE 9) (NOTE 11)	ApplId ListUE_5G GMEC
extGroupId	ExternalGroupId	0..1	Identifies a group of UE(s). (NOTE 10)	GMEC
gpsi	Gpsi	0..1	Identifies a UE using its GPSI. (NOTE 10)	GMEC
flowInfo	array(FlowInfo)	0..N	Describe the IP data flow which requires QoS. (NOTE 2) (NOTE 7) (NOTE 8) (NOTE 9) (NOTE 10) (NOTE 11) (NOTE 17)	
ethFlowInfo	array(EthFlowDescription)	0..N	Identifies Ethernet packet flows. (NOTE 2) (NOTE 6) (NOTE 8) (NOTE 10) (NOTE 11)	EthAsSessionQoS_5G GMEC
enEthFlowInfo	array(EthFlowInfo)	0..N	Identifies the Ethernet flows which require QoS. Each Ethernet flow consists of a flow identifier and the corresponding UL and/or DL flows. (NOTE 2) (NOTE 6) (NOTE 8) (NOTE 10) (NOTE 11)	EnEthAsSessionQoS_5G GMEC
qosReference	string	0..1	Identifies a pre-defined QoS information. (NOTE 4) (NOTE 5)	
altQoSReferences	array(string)	0..N	Identifies an ordered list of pre-defined QoS information. The lower the index of the array for a given entry, the higher the priority. (NOTE 4)	AlternativeQoS_5G GMEC
altQoSReqs	array(AlternativeServiceRequirementsData)	0..N	Identifies an ordered list of alternative service requirements that include individual QoS parameter sets. The lower the index of the array for a given entry, the higher the priority. (NOTE 4)	AltQosWithInParams_5G
disUeNotif	boolean	0..1	Indicates whether to disable QoS flow parameters signalling to the UE when the SMF is notified by the NG-RAN of changes in the fulfilled QoS situation. The fulfilled situation is either the QoS profile or an Alternative QoS Profile.  - true: the QoS flow parameters signalling to the UE is disabled; - false (default): the QoS flow parameters signalling to the UE is not disabled.	DisableUeNotification_5G GMEC
uelpv4Addr	Ipv4Addr	0..1	The Ipv4 address of the UE. (NOTE 2)	

ipDomain	string	0..1	The IPv4 address domain identifier. The attribute may only be provided if the uelpv4Addr attribute is present.	
uelpv6Addr	Ipv6Addr	0..1	The Ipv6 address of the UE. (NOTE 2)	
macAddr	MacAddr48	0..1	Identifies the MAC address. (NOTE 2)	EthAsSessionQoS_5G
listUeAddrs	array(UeAddInfo)	0..N	Identifies the list of UE address(es). (NOTE 9) (NOTE 12)	ListUE_5G
usageThreshold	UsageThreshold	0..1	Time period and/or traffic volume in which the QoS is to be applied.	
sponsorInfo	SponsorInformation	0..1	Indicates a sponsor information	
qosMonInfo	QosMonitoringInformation	0..1	Qos Monitoring information for packet delay measurements. It shall be present when the event "QOS_MONITORING" is subscribed and packet delay measurements are required. Threshold information may be present only within the "repThreshUI", "repThreshDI" and/or "repThreshRp" attributes of the "QosMonitoringInformation" data type. (NOTE 13)	QosMonitoring_5G
directNotifInd	boolean	0..1	Indicates whether the direct event notification is requested.  - true: the direct event notification is requested; - false (default): the direct event notification is not requested. (NOTE 13, NOTE 14)	ExposureToEAS GMEC
tscQosReq	TscQosRequirement	0..1	Contains the QoS requirements for time sensitive communication (supported by time sensitive communication QoS flows as specified in clause 5.27.3 of 3GPP TS 23.501 [8]). (NOTE 5)	TSC_5G GMEC
templnValidity	TemporalInValidity	0..1	Indicates the time interval during which the AF request is not to be applied.	GMEC
requestTestNotification	boolean	0..1	Set to true by the SCS/AS to request the SCEF to send a test notification as defined in clause 5.2.5.3. Set to false or omitted otherwise.	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	0..1	Configuration parameters to set up notification delivery over Websocket protocol as defined in clause 5.2.5.4.	Notification_websocket
events	array(UserPlaneEvent)	0..N	Corresponds to the list of user plane event(s) to which the SCS/AS requests to subscribe.	enNB GMEC
multiModallId	MultiModallId	0..1	Multi-modal Service Identifier, as defined in 3GPP TS 29.514 [52].	MultiMedia
multiModDatFlows	map(AsSessionMediaComponent)	0..N	Each element of the map represents Media Component data for a single-modal data flow(s) of a multi-modal service. The key of the map is the attribute "medCompN". (NOTE 8) (NOTE 13)	MultiMedia
l4sInd	UplinkDownlinkSupport	0..1	Provides L4S support information. (NOTE 16)	L4S GMEC
pduSetQosDI	PduSetQosPara	0..1	Contains the PDU Set QoS Parameter(s) which are used to support PDU Set based QoS handling in the downlink direction.	PDUSetHandling
pduSetQosUI	PduSetQosPara	0..1	Contains the PDU Set QoS Parameter(s) which are used to support PDU Set based QoS handling in the uplink direction.	PDUSetHandling

rTLatencyInd	boolean	0..1	Indicates the service data flow needs to meet the Round-Trip (RT) latency requirement of the service, when it is included and set to "true". The default value is "false" if omitted.	RTLatency GMEC
pdb	PacketDelBudget	0..1	Indicates an upper bound for the time that a packet may be delayed between the UE and the PSA UPF.  This attribute applies also to an AF request QoS for a UE or group of UE(s) not identified by the UE address(es) defined in clause 4.4.9.3 of 3GPP TS 29.522 [62].	RTLatency GMEC
protoDescDL	ProtocolDescription	0..1	Downlink Protocol description for PDU Set identification and end of Data burst indication in UPF.	PDUSetHand ling PowerSaving
protoDescUL	ProtocolDescription	0..1	Uplink Protocol description for PDU Set identification in UE.	PDUSetHand ling
periodUL	DurationMilliSec	0..1	Indicates the time period between the start of the two data bursts in units of milliseconds in Uplink direction.	PowerSaving
periodDL	DurationMilliSec	0..1	Indicates the time period between the start of the two data bursts in units of milliseconds in Downlink direction.	PowerSaving
pdvMon	QosMonitoringInformation	0..1	Contains the Packet Delay Variation information for the subscribed report. It shall be present when the event "PACK_DELAY_VAR" is subscribed. Threshold information may be present only within the "repThreshUL", "repThreshDL" and/or "repThreshRp" attributes of the "QosMonitoringInformation" data type. (NOTE 13)	EnQoSMon GMEC
qosDuration	DurationSec	0..1	Contains the QoS duration to transfer data traffic transmission (e.g., AI/ML transmission). The minimum value of the QoS duration shall be 60 sec.	QoSTiming_ 5G
qosInactInt	DurationSec	0..1	Contains the QoS inactivity interval for the given data traffic transmission (e.g., AI/ML transmission). The minimum value of the QoS inactivity interval shall be 60 sec.	QoSTiming_ 5G
qosMonDatRate	QosMonitoringInformation	0..1	Contains the data rate measurements information for the subscribed report. It shall be present when the event "QOS_MONITORING" is subscribed and data rate measurements are required. Threshold information may be present only within the "repThreshDatRateUL" and/or "repThreshDatRateDL" attributes of the "QosMonitoringInformation" data type. (NOTE 12) (NOTE 13)	EnQoSMon ListUE_5G GMEC
avrgWndw	AverWindow	0..1	Averaging window for the calculation of the data rate for the service data flow. It may be present when the "qosMonDatRate" attribute is present. (NOTE 13)	EnQoSMon GMEC
servAuthInfo	ServAuthInfo	0..1	Indicates the authorization result for the QoS monitoring request. Supplied by the NEF.	EnQoSMon GMEC



qosMonConReq	QosMonitoringInformation	0..1	Contains the requirements of the congestion information (ECN marking percentage) monitoring and reporting. It shall be present when the event "QOS_MONITORING" is subscribed and congestion information measurements are required. (NOTE 13) (NOTE 15) (NOTE 16) Threshold information may be present only within the "conThreshUI" and/or "conThreshDI" attributes of the "QosMonitoringInformation" data type.	EnQoSMonGMEC
listUeConsDtrt	array(IpAddr)	0..N	Identifies the list of UE addresses subject for Consolidated Data Rate monitoring. (NOTE 12)	ListUE_5G

NOTE 1: Properties marked with a feature as defined in clause 5.14.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.

NOTE 2: When the "GMEC" feature is not supported, one of "uelpv4Addr", "uelpv6Addr" or "macAddr" or "listUeAdrs" shall be included. If ipv4 or ipv6 address is provided, IP flow information shall be provided. If MAC address is provided and the Appld feature is not supported, Ethernet flow information (either "ethFlowInfo", or if the feature EnEthAsSessionQoS\_5G is supported, "enEthFlowInfo") shall be provided. If the Appld feature is supported, one of IP flow information, Ethernet flow information (if EthAsSessionQoS\_5G and/or EnEthAsSessionQoS\_5G is supported) or External Application Identifier shall be provided.

NOTE 3: The property is only applicable for the NEF.

NOTE 4: The attributes "altQoSReferences" and "altQoSReqs" are mutually exclusive. The attributes "qosReference" and "altQoSReqs" are also mutually exclusive.

NOTE 5: The attributes "reqGbrDI", "reqGbrUI", "reqMbrDI", "reqMbrUI", "maxTscBurstSize", "req5Gsdelay", "reqPer" (if the ExtQoS\_5G and/or "GMEC" feature(s) is/are supported), and "priority" within the "tscQosReq" attribute may be provided only if the "qosReference" attribute is not provided.

NOTE 6: When the Ethernet flow information is provided and, the EthAsSessionQoS\_5G and EnEthAsSessionQoS\_5G features are supported, either the "ethFlowInfo" or the "enEthFlowInfo" shall be provided, but not both simultaneously.

NOTE 7: The "tosTC" attribute of the "flowInfo" attribute may only be present if the "ToSTC\_5G" feature is supported.

NOTE 8: The attributes "exterAppld", "flowInfo", "ethFlowInfo", "enEthFlowInfo", "qosReference", "altQoSReferences", "altQoSReqs", "tscQosReq", "qosMonInfo" may be provided only if the "multiModDatFlows" attribute is not provided.

NOTE 9: When the "ListUE\_5G" feature is supported, the "listUeAdrs" attribute shall be provided, and either "exterAppld" attribute or "flowInfo" attribute shall be provided.

NOTE 10: When the "GMEC" feature is supported and the target UE(s) are not identified by UE address(es) (i.e., the "uelpv4Addr", "uelpv6Addr", "macAddr" or "listUeAdrs" attribute is not applicable to identify the UE(s)), the "extGroupID" attribute and the "gpsi" attributes are mutually exclusive And either one of them shall be provided. If either the "gpsi" attribute or the "extGroupID" attribute are present, then neither the "uelpv4Addr" attribute, the "uelpv6Addr" attribute, the "macAddr" attribute nor the "listUeAdrs" attribute shall be included.

NOTE 11: When the "GMEC" feature is supported, either the "exterAppld" attribute, "flowInfo" attribute or Ethernet flow information (either within the "ethFlowInfo" attribute or the "enEthFlowInfo" attribute) shall be provided.

NOTE 12: When the "ListUE\_5G" feature is supported and the "qosMonDatRate" attribute is provided, the "qosMonDatRate" attribute indicates the consolidated data rate for the list of UEs, the "consDataRateThrDI" and "consDataRateThrUI" attributes contained in "qosMonDatRate" attribute indicate the upper bound of the aggregated DL/UL data rate and by default, are applicable to the list of UEs specified by the "listUeAdrs" attribute. If the "listUeConsDtrt" attribute is also provided, then it has to be the subset of "listUeAdrs" attribute.

NOTE 13: When the "MultiMedia" feature is supported, the "qosMonInfo", "directNotifInd", "pdvMon", "qosMonDatRate", "avrgWndw" and "qosMonConReq" attributes may be present only when the "multiModDatFlows" attribute is not present.

NOTE 14: When the "ExposureToEAS" feature is supported, the "directNotifInd" attribute indicates whether direct event notification is requested for the packet delay measurements provided in the "qosMonInfo" attribute. When the "EnQoSMon" feature is supported, the "directNotifInd" attribute indicates whether direct event notification is requested for the QoS measurement(s) provided in the "qosMonInfo", "qosMonDatRate" and/or "qosMonConReq" attribute(s).

NOTE 15: Only the "EVENT\_TRIGGERED" reporting frequency in "repFreqs" attribute contained in QosMonitoringInformation data type is applicable.

NOTE 16: When both, the "L4S" and "EnQoSMon" features are supported, the AF request may include either the indication of L4S support within the "l4sInd" attribute or the request for congestion measurements within the "qosMonConReq" attribute, but shall not include both attributes simultaneously.

NOTE 17: When the "ListUE\_5G" feature is supported and the "flowInfo" attribute is present, the flow description information shall be common for the list of UE(es) with the application server side IP address, port number and protocol.

#### 5.14.2.1.3 Type: AsSessionWithQoSSubscriptionPatch

This type represents an AS session request with specific QoS for the service provided by the SCS/AS to the SCEF via T8 interface. The structure is used for PATCH request.

**Table 5.14.2.1.3-1: Definition of type AsSessionWithQoSSubscriptionPatch**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
exterAppld	string	0..1	Identifies the external Application Identifier. (NOTE 2) (NOTE 8)	Appld ListUE_5G GMEC
flowInfo	array(FlowInfo)	0..N	Describe the data flow which requires QoS. (NOTE 2) (NOTE 5) (NOTE 6) (NOTE 8) (NOTE 14)	
ethFlowInfo	array(EthFlowDescription)	0..N	Describes Ethernet packet flows. (NOTE 2) (NOTE 6)	EthAsSessionQoS_5G GMEC
enEthFlowInfo	array(EthFlowInfo)	0..N	Identifies the Ethernet flows which require QoS. Each Ethernet flow consists of a flow identifier and the corresponding UL and/or DL flows. (NOTE 2) (NOTE 6)	EnEthAsSessionQoS_5G GMEC
listUeAddr	array(UeAddInfo)	0..N	Identifies the list of UE address(es). (NOTE 8) (NOTE 9)	ListUE_5G
qosReference	string	0..1	Pre-defined QoS reference. (NOTE 3) (NOTE 4)	
altQoSReferences	array(string)	0..N	Identifiers an ordered list of pre-defined QoS information. The lower the index of the array for a given entry, the higher the priority. (NOTE 3)	AlternativeQoS_5G GMEC
altQoSReqs	array(AlternativeServiceRequirementsData)	0..N	Identifies an ordered list of alternative service requirements that include individual QoS parameter sets. The lower the index of the array for a given entry, the higher the priority. (NOTE 3)	AltQoSWithinParams_5G
disUeNotif	boolean	0..1	Indicates whether to disable QoS flow parameters signalling to the UE when the SMF is notified by the NG-RAN of changes in the fulfilled QoS situation. The fulfilled situation is either the QoS profile or an Alternative QoS Profile.  - true: the QoS flow parameters signalling to the UE is disabled; - false: the QoS flow parameters signalling to the UE is not disabled.	DisableUENotification_5G GMEC
usageThreshold	UsageThresholdRm	0..1	Time period and/or traffic volume in which the QoS is to be applied.	
qosMonInfo	QosMonitoringInformationRm	0..1	Qos Monitoring information for packet delay measurements. It may be present when the event "QOS_MONITORING" is subscribed. Threshold information may be present only within the "repThreshUI", "repThreshDI" and/or "repThreshRp" attributes of the "QosMonitoringInformationRm" data type. (NOTE 10)	QoSMonitoring_5G GMEC
directNotifInd	boolean	0..1	Indicates whether the direct event notification is requested.  - true: the direct event notification is requested; - false: the direct event notification is not requested. (NOTE 10, NOTE 11)	ExposureToEAS GMEC
tscQosReq	TscQosRequirementRm	0..1	Contains the QoS requirements for time sensitive communication. (NOTE 4)	TSC_5G MultiMedia GMEC
templInvalidity	TemporalInvalidity	0..1	Indicates the time interval during which the AF request is not to be applied.	GMEC
notificationDestination	Link	0..1	Contains the URL to receive the notification event(s) from the SCEF.	

events	array(UserPlaneEvent)	0..N	Corresponds to the list of user plane event(s) to which the SCS/AS requests to subscribe.	enNB GMEC
multiModDatFlows	map(AsSessionMediaComponentRm)	0..N	Each element of the map represents Media Component data for a single-modal data flow(s) of a multi-modal service. The key of the map is the attribute "medCompN". (NOTE 6, NOTE 10)	MultiMedia
l4sInd	UplinkDownlinkSupport	0..1	Provides L4S support information. (NOTE 13)	L4S GMEC
pduSetQosDI	PduSetQosParaRm	0..1	Contains the PDU Set QoS Parameter(s) which are used to support PDU Set based QoS handling in the downlink direction.	PDUSetHandling
pduSetQosUI	PduSetQosParaRm	0..1	Contains the PDU Set QoS Parameter(s) which are used to support PDU Set based QoS handling in the uplink direction.	PDUSetHandling
rTLatencyInd	boolean	0..1	Indicates the service data flow needs to meet the Round-Trip (RT) latency requirement of the service, when it is included and set to "true".	RTLatency GMEC
pdb	PacketDelBudgetRm	0..1	Indicates an upper bound for the time that a packet may be delayed between the UE and the PSA UPF.  This attribute applies also to an AF request QoS for a UE or group of UE(s) not identified by the UE address(es) defined in clause 4.4.9.3 of 3GPP TS 29.522 [62].	RTLatency GMEC
protoDescDI	ProtocolDescriptionRm	0..1	Downlink Protocol description for PDU Set identification and end of Data burst indication in UPF	PDUSetHandling PowerSaving
protoDescUI	ProtocolDescriptionRm	0..1	Uplink Protocol description for PDU Set identification in UE	PDUSetHandling
periodUI	DurationMilliSecRm	0..1	Indicates the time period between the start of the two data bursts in units of milliseconds in Uplink direction.	PowerSaving
periodDI	DurationMilliSecRm	0..1	Indicates the time period between the start of the two data bursts in units of milliseconds in Downlink direction.	PowerSaving
pdvMon	QosMonitoringInformationRm	0..1	Packet Delay Variation information for the subscribed report. It may be present when the event "PACK_DELAY_VAR" is subscribed.  Threshold information may be present only within the "repThreshUI", "repThreshDI" and/or "repThreshRp" attributes of the "QosMonitoringInformationRm" data type. (NOTE 10)	EnQoSMon GMEC
qosDuration	DurationSecRm	0..1	Contains the QoS duration to transfer data transmission (e.g., AI/ML transmission). The minimum value of the QoS duration shall be 60 sec..	QoSTiming_5G
qosInactInt	DurationSecRm	0..1	Contains the QoS inactivity interval for the given data transfer transmission (e.g., AI/ML transmission). The minimum value of the QoS inactivity interval shall be 60 sec.	QoSTiming_5G
qosMonDatRate	QosMonitoringInformationRm	0..1	Contains the data rate measurements information for the subscribed report. It may be present when the event "QOS_MONITORING" is subscribed and data rate measurements apply.  Threshold information may be present only within the "repThreshDatRateUI" and/or "repThreshDatRateDI" attributes of the "QosMonitoringInformationRm" data type. (NOTE 9, NOTE 10)	EnQoSMon ListUE_5G GMEC

avrgWndw	AverWindowRm	0..1	Averaging window for the calculation of the data rate for the service data flow. (NOTE 10)	EnQoSMon GMEC
qosMonConReq	QosMonitoringInformationRm	0..1	Contains the requirements of the congestion information (ECN marking percentage) monitoring and reporting. It may be present when the event "QOS_MONITORING" is subscribed and congestion information measurements apply. Threshold information may be present only within the "conThreshUI" and/or "conThreshDI" attributes of the "QosMonitoringInformationRm" data type. (NOTE 10) (NOTE 12) (NOTE 13)	EnQoSMon GMEC
listUeConsDtrt	array(IpAddr)	0..N	Identifies the list of UE addresses subject for Consolidated Data Rate monitoring. (NOTE 9)	ListUE_5G
<p>NOTE 1: Properties marked with a feature as defined in clause 5.14.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.</p> <p>NOTE 2: One of "exterAppld", "flowInfo" or either "ethFlowInfo" or "enEthFlowInfo" may be provided.</p> <p>NOTE 3: The attributes "altQoSReferences" and "altQoSReqs" are mutually exclusive. The attributes "qosReference" and "altQoSReqs" are also mutually exclusive.</p> <p>NOTE 4: The attributes "reqGbrDI", "reqGbrUI", "reqMbrDI", "reqMbrUI", "maxTscBurstSize", "req5Gsdelay", "reqPer" (if the ExtQoS_5G and/or "GMEC" feature(s) is supported), and "priority" within the "tscQosReq" attribute may be provided only if the "qosReference" attribute is not provided.</p> <p>NOTE 5: The "tosTC" attribute of the "flowInfo" attribute may only be present if the "ToSTC_5G" feature is supported.</p> <p>NOTE 6: The attributes "exterAppld", "flowInfo", "ethFlowInfo", "enEthFlowInfo", "qosReference", "altQoSReferences", "altQoSReqs", "tscQosReq", "qosMonInfo" may be provided only if the "multiModDatFlows" attribute is not provided.</p> <p>NOTE 8: When the "ListUE_5G" feature is supported, the "listUeAdrs" attribute may be provided, and/or either "exterAppld" attribute or "flowInfo" attribute may be provided.</p> <p>NOTE 9: When the "ListUE_5G" feature is supported and the "qosMonDatRate" attribute is provided, the "qosMonDatRate" attribute indicates the consolidated data rate for the list of UEs, the "consDataRateThrDI" and "consDataRateThrUI" attributes contained in "qosMonDatRate" attribute indicate the upper bound of the aggregated DL/UL data rate and by default, are applicable to the list of UEs specified by the "listUeAdrs" attribute. If the "listUeConsDtrt" attribute is also provided, then it has to be the subset of "listUeAdrs" attribute.</p> <p>NOTE 10: When the "MultiMedia" feature is supported, the "qosMonInfo", "directNotifInd", "pdvMon", "qosMonDatRate", "avrgWndw" and "qosMonConReq" attributes may be present only when the "multiModDatFlows" attribute is not present.</p> <p>NOTE 11: When the "ExposureToEAS" feature is supported, the "directNotifInd" attribute indicates whether direct event notification is requested for the packet delay measurements provided in the "qosMonInfo" attribute. When the "EnQoSMon" feature is supported, the "directNotifInd" attribute indicates whether direct event notification is requested for the QoS measurement(s) indicated in the provided and/or previously provided "qosMonInfo", "qosMonDatRate" and "qosMonConReq" attribute(s).</p> <p>NOTE 12: Only the "EVENT_TRIGGERED" reporting frequency in "repFreqs" attribute contained in QosMonitoringInformationRm data type is applicable.</p> <p>NOTE 13: When both, the "L4S" and "EnQoSMon" features are supported, the AF request may include either the indication of L4S support within the "l4sInd" attribute or the request for congestion measurements within the "qosMonConReq" attribute but shall not include both attributes simultaneously. As result of the PATCH operation, the Individual AS Session with Required QoS Subscription resource shall not contain simultaneously both, the indication of L4S support and the subscription to congestion monitoring.</p> <p>NOTE 14: When the "ListUE_5G" feature is supported and the "flowInfo" attribute is present, the flow description information shall be common for the list of UE(es) with the application server side IP address, port number and protocol.</p>				

#### 5.14.2.1.4 Type: UserPlaneNotificationData

This type represents the parameters which shall be notify the SCS/AS for user plane event(s).

**Table 5.14.2.1.4-1: Definition of the UserPlaneNotificationData data type**

Attribute name	Data type	Cardinality	Description
transaction	Link	1	Link to the transaction resource to which this notification is related.
eventReports	array(UserPlaneEvent Report)	1..N	Contains the reported event and applicable information

#### 5.14.2.1.5 Type: UserPlaneEventReport

This type represents an event report for user plane. It shall comply with the provisions defined in table 5.14.2.1.5-1.

**Table 5.14.2.1.5-1: Definition of the UserPlaneEventReport data type**



Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
event	UserPlaneEvent	1	Indicates the event reported by the SCEF.	
accumulatedUsage	AccumulatedUsage	0..1	Contains the applicable information corresponding to the event.	
flowIds	array(integer)	0..N	Identifies the affected flows that were sent during event subscription. It may be omitted when the reported event applies to all the flows sent during the subscription. (NOTE 2)	
multiModFlows	array(MultiModalFlows)	0..N	Each element of the array identifies the flow filters for the multi-modal data flows that were sent during event subscription and that are affected by the reported event. It may be omitted when the reported event applies to all the multi-modal data flows sent during the subscription. (NOTE 2)	MultiMedia
appliedQosRef	string	0..1	The currently applied QoS reference (or applied individual QoS parameter set, if AltQosWithIndParams_5G is supported). Applicable for event QOS_NOT_GUARANTEED or SUCCESSFUL_RESOURCES_ALLOCATION. When it is omitted and the "event" attribute is QOS_NOT_GUARANTEED, the event report indicates that the lowest priority alternative QoS profile could not be fulfilled either.	AlternativeQoS_5G, AltQosWithIndParams_5G
altQosNotSupplnd	boolean	0..1	It may be set to true when the "event" attribute is QOS_NOT_GUARANTEED to indicate that alternative service requirements are not supported by the access network. The default value false shall apply if the attribute is not present.	AltQoSProfilesSupportReport, GMEC
plmnId	PlmnIdNid	0..1	Contains the PLMN Identifier or the SNPN Identifier.  This attribute may be present when the reported event is "PLMN_CHG" and it is allowed to be exposed to the AF based on the local policy or local configuration.	enNB_5G, GMEC
qosMonReports	array(QosMonitoringReport)	0..N	Contains the QoS Monitoring Reporting information for packet delay. It shall be present when the notified event is "QOS_MONITORING" and packet delay measurement error or packet delay measurements are available..  Only the "ulDelays", "dlDelays" and/or "rtDelays" attributes, or the "pdmf" attribute in QosMonitoringReport may be present.	QoSMonitoring_5G, GMEC
pdvMonReports	array(PdvMonitoringReport)	0..N	Contains the PDV Monitoring Reporting information. It shall be present when the notified event is "PACK_DELAY_VAR" and packet delay variations measurements are available. (NOTE 3)	EnQoSMon, GMEC
ratType	RatType	0..1	Contains the RAT type.  This attribute may be present if applicable, the notified event is "ACCESS_TYPE_CHANGE" and it is allowed to be exposed to the AF based on the local policy or local configuration.	enNB_5G, GMEC
batOffsetInfo	BatOffsetInfo	0..1	The BAT offset and the optionally adjusted periodicity.	EnTSCAC

aggrDataRateRpts	array(QosMonitoringReport)	0..N	<p>Contains QoS Monitoring for aggregated data rate reporting information. It shall be present when the notified event is "QOS_MONITORING" and data rate measurements are available.</p> <p>Only the "ulAggrDataRate" and/or "dlAggrDataRate" attributes in QosMonitoringReport may be present.</p>	ListUE_5G, GMEC
rttMonReports	array(QosMonitoringReport)	0..N	<p>Round-Trip delay for the indicated UL and DL QoS flows. It shall be present when the notified event is "RT_DELAY_TWO_QOS_FLOWS".</p> <p>Only the "rtDelays" attributes in QosMonitoringReport may be present.</p>	EnQoSMon, GMEC
qosMonDatRateRpts	array(QosMonitoringReport)	0..1	<p>Contains QoS Monitoring for data rate reporting information. It shall be present when the notified event is "QOS_MONITORING" and data rate measurements are available.</p> <p>Only the "ulDataRate" and/or "dlDataRate" attributes in QosMonitoringReport may be present.</p>	EnQoSMon, GMEC
qosMonConInfoRpts	array(QosMonitoringReport)	0..N	<p>Contains QoS Monitoring for congestion information (ECN marking percentage). It shall be present when the notified event is "QOS_MONITORING" and congestion measurements are available.</p> <p>Only the "ulConInfo" and/or "dlConInfo" attributes in QosMonitoringReport may be present.</p>	EnQoSMon, GMEC
<p>NOTE 1: Properties marked with a feature as defined in clause 5.14.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.</p> <p>NOTE 2: The attributes "flowIds" and "multiModFlows" are mutually exclusive.</p> <p>NOTE 3: The PdvMonitoringReport data type does not include the "flows" attribute in this API.</p>				

5.14.2.1.6 Type: QosMonitoringInformation

**Table 5.14.2.1.6-1: Definition of type QosMonitoringInformation**

Attribute name	Data type	Cardinality	Description	Applicability
reqQosMonParams	array(RequestedQosMonitoringParameter)	1..N	<p>Indicates the QoS information to be measured, e.g. UL packet delay, DL packet delay and/or round trip packet delay between the UE and the UPF is to be monitored when the QoS Monitoring for packet delay is enabled for the service data flow.</p> <p>If the "EnQoSMon" feature is supported, the indication of QoS monitoring for congestion (e.g., the UL and/or the DL congestion indication) or data rate (e.g., the UL and/or the DL data rate indication) may also be provided.</p> <p>If the "EnQoSMon" feature is supported and the "PACK_DELAY_VAR" event is subscribed, it indicates whether PDV measurement is for the UL, DL and/or round trip packet delay.</p> <p>If the "EnQoSMon" feature is supported and the "RT_DELAY_TWO_QOS_FLOWS" event is subscribed, it indicates round trip packet delay.</p> <p>If the "ListUE_5G" feature is supported, the indication of QoS monitoring for consolidated data rate (e.g., the UL and/or the DL data rate indication) may also be provided.</p>	
repFreqs	array(ReportingFrequency)	1..N	Indicates the frequency for the reporting, such as event triggered and/or periodic.	
repThreshDL	UInteger	0..1	<p>Unsigned integer identifying a threshold in units of milliseconds for DL packet delay measurement reports.</p> <p>If the "EnQoSMon" feature is supported and the "PACK_DELAY_VAR" event is subscribed, it indicates the threshold for DL PDV measurement reports.</p> <p>It shall be present when the "reqQosMonParams" attribute includes "DOWNLINK".</p>	
repThreshUL	UInteger	0..1	<p>Unsigned integer identifying a threshold in units of milliseconds for UL packet delay measurement reports.</p> <p>If the "EnQoSMon" feature is supported and the "PACK_DELAY_VAR" event is subscribed, it indicates the threshold for UL PDV measurement reports.</p> <p>It shall be present when the "reqQosMonParams" attribute includes "UPLINK".</p>	

repThreshRp	UInteger	0..1	<p>Unsigned integer identifying a threshold in units of milliseconds for round trip packet delay measurement reports.</p> <p>If the "EnQoSMon" feature is supported and the "PACK_DELAY_VAR" event is subscribed, it indicates the threshold for round trip PDV measurement reports.</p> <p>If the "EnQoSMon" feature is supported and the "RT_DELAY_TWO_QOS_FLOWS" event is subscribed, it indicates the threshold for round trip delay for two QoS flows (i.e. the UL traffic and DL traffic of the service data flow are separated into two QoS flows respectively) measurement reports.</p>	
conThreshDI	UInteger	0..1	Indicates the downlink threshold for congestion reporting, i.e. for the reporting of the received ECN marking percentage for DL. Only applicable when the "repFreqs" attribute includes "EVENT_TRIGGERED" and the "reqQosMonParams" attribute includes "DOWNLINK_CONGESTION".	EnQoSMon, GMEC
conThreshUI	UInteger	0..1	Indicates the uplink threshold for the congestion reporting, i.e. for the reporting of the received ECN marking percentage for UL. Only applicable when the "repFreqs" attribute includes "EVENT_TRIGGERED" and the "reqQosMonParams" attribute includes "UPLINK_CONGESTION".	EnQoSMon, GMEC
waitTime	DurationSec	0..1	Indicates the minimum waiting time between subsequent reports. It shall be present when the "repFreqs" attribute includes "EVENT_TRIGGERED".	
repPeriod	DurationSec	0..1	Indicates the time interval between successive reporting. It shall be present when the "repFreqs" attribute includes "PERIODIC". If the feature "PacketDelayFailureReport" is supported, it also indicates the time interval at which a packet delay measurement failure needs to be reported if no measurement result is provided. It shall be present when the requested QoS monitoring parameter is packet delay and when the "repFreqs" attribute includes "PERIODIC" or "EVENT_TRIGGERED".	
repThreshDatRate DI	BitRate	0..1	Indicates the bit rate threshold for the DL. Only applicable when the "repFreqs" attribute includes "EVENT_TRIGGERED" and the "reqQosMonParams" attribute includes "DOWNLINK_DATA_RATE".	EnQoSMon, GMEC
repThreshDatRate UI	BitRate	0..1	Indicates the bit rate threshold for the UL. Only applicable when the "repFreqs" attribute includes "EVENT_TRIGGERED" and the "reqQosMonParams" attribute includes "UPLINK_DATA_RATE".	EnQoSMon, GMEC
consDataRateThr DI	BitRate	0..1	Indicates the Downlink Consolidated Data Rate Threshold. Only applicable when the "repFreqs" attribute includes "EVENT_TRIGGERED" and the "reqQosMonParams" attribute includes "DOWNLINK_DATA_RATE".	ListUE_5G

consDataRateThrUI	BitRate	0..1	Indicates the Uplink Consolidated Data Rate Threshold. Only applicable when the "repFreqs" attribute includes "EVENT_TRIGGERED" and the "reqQosMonParams" attribute includes "UPLINK_DATA_RATE".	ListUE_5G
-------------------	---------	------	---	-----------

#### 5.14.2.1.7 Type: QosMonitoringInformationRm

This type represents a QoS Monitoring Information which is defined in clause 5.14.2.1.7 but, if the "EnQoSMon" feature is supported, defined with "nullable: true" property so it can be removed in "JSON Merge Patch", as defined in IETF RFC 7396 [39]. It shall comply with the provisions defined in table 5.14.2.1.7-1.

The "repThreshDI", "repThreshUI", "repThreshRp", "conThreshDI", "conThreshUI", "waitTime", "repPeriod", "repThreshDatRateDI", "repThreshDatRateUI", "consDataRateThrDI" and "consDataRateThrUI" are also removable attributes with "JSON Merge Patch".

**Table 5.14.2.1.7-1: Definition of type QosMonitoringInformationRm**

Attribute name	Data type	Cardinality	Description	Applicability
reqQosMonParams	array(RequestedQosMonitoringParameter)	0..N	<p>Indicates the QoS information to be measured, e.g. UL packet delay, DL packet delay and/or round trip packet delay between the UE and the UPF is to be monitored when the QoS Monitoring for packet delay is enabled for the service data flow.</p> <p>If the "EnQoSMon" feature is supported, the indication of QoS monitoring for congestion (e.g., the UL and/or the DL congestion indication) or data rate (e.g., the UL and/or the DL data rate indication) may also be provided.</p> <p>If the "EnQoSMon" feature is supported and the "PACK_DELAY_VAR" event is subscribed, it indicates whether PDV measurement is for the UL, DL and/or round trip packet delay.</p> <p>If the "EnQoSMon" feature is supported and the "RT_DELAY_TWO_QOS_FLOWS" event is subscribed, it indicates round trip packet delay.</p> <p>If the "ListUE_5G" feature is supported, the indication of QoS monitoring for consolidated data rate (e.g., the UL and/or the DL data rate indication) may also be provided.</p>	
repFreqs	array(ReportingFrequency)	0..N	Indicates the frequency for the reporting, such as event triggered and/or periodic.	
repThreshDL	UIntegerRm	0..1	<p>Unsigned integer identifying a threshold in units of milliseconds for DL packet delay measurement reports.</p> <p>If the "EnQoSMon" feature is supported and the "PACK_DELAY_VAR" event is subscribed, it indicates the threshold for DL PDV measurement reports.</p> <p>It shall be present when the "reqQosMonParams" attribute includes "DOWNLINK".</p>	
repThreshUL	UIntegerRm	0..1	<p>Unsigned integer identifying a threshold in units of milliseconds for UL packet delay measurement reports.</p> <p>If the "EnQoSMon" feature is supported and the "PACK_DELAY_VAR" event is subscribed, it indicates the threshold for UL PDV measurement reports.</p> <p>It shall be present when the "reqQosMonParams" attribute includes "UPLINK".</p>	



repThreshRp	UIntegerRm	0..1	<p>Unsigned integer identifying a threshold in units of milliseconds for round trip packet delay measurement reports.</p> <p>If the "EnQoSMon" feature is supported and the "PACK_DELAY_VAR" event is subscribed, it indicates the threshold for round trip PDV measurement reports.</p> <p>If the "EnQoSMon" feature is supported and the "RT_DELAY_TWO_QOS_FLOWS" event is subscribed, it indicates the threshold for round trip delay for two QoS flows (i.e. the UL traffic and DL traffic of the service data flow are separated into two QoS flows respectively) measurement reports.</p>	
conThreshDI	UIntegerRm	0..1	Indicates the downlink threshold for congestion reporting, i.e. for the reporting of the received ECN marking percentage for DL. Only applicable when the "repFreqs" attribute includes "EVENT_TRIGGERED" and the "reqQosMonParams" attribute includes "DOWNLINK_CONGESTION".	EnQoSMon, GMEC
conThreshUI	UIntegerRm	0..1	Indicates the uplink threshold for congestion reporting, i.e. for the reporting of the received ECN marking percentage for UL. Only applicable when the "repFreqs" attribute includes "EVENT_TRIGGERED" and the "reqQosMonParams" attribute includes "UPLINK_CONGESTION".	EnQoSMon, GMEC
waitTime	DurationSecRm	0..1	Indicates the minimum waiting time between subsequent reports. It shall be present when the "repFreqs" attribute includes "EVENT_TRIGGERED".	
repPeriod	DurationSecRm	0..1	Indicates the time interval between successive reporting. It shall be present when the "repFreqs" attribute includes "PERIODIC". If the feature "PacketDelayFailureReport" is supported, it also indicates the time interval at which a packet delay measurement failure needs to be reported if no measurement result is provided. It shall be present when the requested QoS monitoring parameter is packet delay and when the "repFreqs" attribute includes "PERIODIC" or "EVENT_TRIGGERED".	
repThreshDatRate DI	BitRateRm	0..1	Indicates the bit rate threshold for the DL. Only applicable when the "repFreqs" attribute includes "EVENT_TRIGGERED" and the "reqQosMonParams" attribute includes "DOWNLINK_DATA_RATE".	EnQoSMon, GMEC
repThreshDatRate UI	BitRateRm	0..1	Indicates the bit rate threshold for the UL. Only applicable when the "repFreqs" attribute includes "EVENT_TRIGGERED" and the "reqQosMonParams" attribute includes "UPLINK_DATA_RATE".	EnQoSMon, GMEC
consDataRateThr DI	BitRateRm	0..1	Indicates the Downlink Consolidated Data Rate Threshold. Only applicable when the "repFreqs" attribute includes "EVENT_TRIGGERED" and the "reqQosMonParams" attribute includes "DOWNLINK_DATA_RATE".	ListUE_5G

consDataRateThr UI	BitRateRm	0..1	Indicates the Uplink Consolidated Data Rate Threshold. Only applicable when the "repFreqs" attribute includes "EVENT_TRIGGERED" and the "reqQosMonParams" attribute includes "UPLINK_DATA_RATE".	ListUE_5G
-----------------------	-----------	------	---	-----------

## 5.14.2.1.8 Type: QosMonitoringReport

**Table 5.14.2.1.8-1: Definition of type QosMonitoringReport**

Attribute name	Data type	Cardinality	Description	Applicability
ulDelays	array(Uinteger)	0..N	Uplink packet delay in units of milliseconds. (NOTE)	
dlDelays	array(Uinteger)	0..N	Downlink packet delay in units of milliseconds. (NOTE)	
rtDelays	array(Uinteger)	0..N	Round trip delay in units of milliseconds. (NOTE)	
pdmf	boolean	0..1	Packet delay measurement failure indicator. When set to true, it indicates that a packet delay failure has occurred. Default value is false if omitted.	PacketDelay FailureReport, GMEC
ulDataRate	BitRate	0..1	Average data throughput in uplink direction.	EnQoSMon, GMEC
dlDataRate	BitRate	0..1	Average data throughput in downlink direction.	EnQoSMon, GMEC
ulAggrDataRate	BitRate	0..1	Indicates the uplink aggregated Data Rate for the applicable list of UEs provided by AF.	ListUE_5G
dlAggrDataRate	BitRate	0..1	Indicates the downlink aggregated Data Rate for the applicable list of UEs provided by AF.	ListUE_5G
ulConInfo	Uinteger	0..1	Percentage of congestion information in uplink direction.	EnQoSMon, GMEC
dlConInfo	Uinteger	0..1	Percentage of congestion information in downlink direction.	EnQoSMon, GMEC
NOTE:	In this release of the specification one element may be included in the array as defined in clause 4.4.9 in TS 29.522 [62].			

## 5.14.2.1.9 Type: TscQosRequirement

Table 5.14.2.1.9-1: Definition of type TscQosRequirement

Attribute name	Data type	Cardinality	Description	Applicability
reqGbrDI	BitRate	0..1	Requested GBR in downlink.	
reqGbrUI	BitRate	0..1	Requested GBR in uplink.	
reqMbrDI	BitRate	0..1	Requested MBR in downlink.	
reqMbrUI	BitRate	0..1	Requested MBR in uplink.	
maxTscBurstSize	ExtMaxDataBurstVol	0..1	Maximum burst size of the TSC traffic in units of Bytes. Minimum = 4096, Maximum = 2000000.	
req5Gsdelay	PacketDelBudget	0..1	Requested Delay of the TSC traffic.	
reqPer	PacketErrRate	0..1	Requested Packet Error Rate of the TSC traffic.	ExtQoS_5G GMEC
priority	TscPriorityLevel	0..1	Unsigned integer indicating the TSC traffic priority in relation to other TSC and non-TSC traffic.	
tscaiTimeDom	UInteger	0..1	Indicates the (g)PTP domain that the (TSN)AF is located in.	
tscaiInputUI	TscailInputContainer	0..1	Transports the input parameters for TSC traffic to construct the TSC Assistance Container in uplink direction. (NOTE)	
tscaiInputDI	TscailInputContainer	0..1	Transports the input parameters for TSC traffic to construct the TSC Assistance Container in downlink direction. (NOTE)	
capBatAdaptation	boolean	0..1	Indicates the capability for AF to adjust the burst sending time, when it is supported and set to "true". The default value is "false" if omitted. (NOTE)	EnTSCAC GMEC
NOTE: The "burstArrivalTimeWnd" attribute, within the "tscaiInputUI" and/or "tscaiInputDI" attributes, and the "capBatAdaptation" attribute are mutually exclusive.				

## 5.14.2.1.10 Type: TscQosRequirementRm

**Table 5.14.2.1.10-1: Definition of type TscQosRequirementRm**

Attribute name	Data type	Cardinality	Description	Applicability
reqGbrDL	BitRateRm	0..1	Requested GBR in downlink.	
reqGbrUL	BitRateRm	0..1	Requested GBR in uplink.	
reqMbrDL	BitRateRm	0..1	Requested MBR in downlink.	
reqMbrUL	BitRateRm	0..1	Requested MBR in uplink.	
maxTscBurstSize	ExtMaxDataBurstVolRm	0..1	Maximum burst size of the TSC traffic in units of Bytes. Minimum = 4096, Maximum = 2000000.	
req5Gsdelay	PacketDelBudgetRm	0..1	Requested Delay of the TSC traffic.	
reqPer	PacketErrRateRm	0..1	Requested Packet Error Rate of the TSC traffic.	ExtQoS_5G, GMEC
priority	TscPriorityLevelRm	0..1	Unsigned integer indicating the TSC traffic priority in relation to other TSC and non-TSC traffic.	
tscaiTimeDom	UIntegerRm	0..1	Indicates the (g)PTP domain that the (TSN)AF is located in.	
tscaiInputUL	TscailInputContainer	0..1	Transports the input parameters for TSC traffic to construct the TSC Assistance Container in uplink direction. (NOTE)	
tscaiInputDL	TscailInputContainer	0..1	Transports the input parameters for TSC traffic to construct the TSC Assistance Container in downlink direction. (NOTE)	
capBatAdaptation	boolean	0..1	Indicates the capability for AF to adjust the burst sending time, when it is supported and set to "true". (NOTE)	EnTSCAC, GMEC
NOTE: The "burstArrivalTimeWnd" attribute, within the "tscaiInputUL" and/or "tscaiInputDL" attributes, and the "capBatAdaptation" attribute are mutually exclusive.				

## 5.14.2.1.11 Type AdditionInfoAsSessionWithQos

**Table 5.14.2.1.11-1: Definition of type AdditionInfoAsSessionWithQos**

Attribute name	Data type	P	Cardinality	Description	Applicability
acceptableServInfo	AcceptableServiceInfo	O	0..1	Describes information related to the acceptable service information, i.e., the maximum acceptable bandwidth for an AF session and/or for specific media components.	

## 5.14.2.1.12 Type: ProblemDetailsAsSessionWithQos

**Table 5.14.2.1.12-1: Definition of type ProblemDetailsAsSessionWithQos as a list of to be combined data types**

Data type	Cardinality	Description	Applicability
ProblemDetails	1	Problem details as specified in clause 5.2.12.12 to include an error response	
AdditionInfoAsSessionWithQos	1	Describes additional error information specific for this API.	

## 5.14.2.1.13 Type AsSessionMediaComponent

This type represents media component data for a single-modal data flow of a multi-modal service. It shall comply with the provisions defined in table 5.14.2.1.13-1.

**Table 5.14.2.1.13-1: Definition of type AsSessionMediaComponent**

Attribute name	Data type	Cardinality	Description	Applicability
flowInfos	array(FlowInfo)	0..N	Contains the IP data flow(s) description for a single-modal data flow.	
qosReference	string	0..1	Identifies a pre-defined QoS information.	
altSerReqs	array(string)	0..N	Ordered list of alternative service requirements that include a set of QoS references. The lower the index of the array for a given entry, the higher the priority.(NOTE 3)	
altSerReqsData	array(AlternativeServiceRequirementsData)	0..N	Ordered list of alternative service requirements that include individual QoS parameter sets. The lower the index of the array for a given entry, the higher the priority. (NOTE 3)	
disUeNotif	boolean	0..1	Indicates to disable QoS flow parameters signalling to the UE when the SMF is notified by the NG-RAN of changes in the fulfilled QoS situation when it is included and set to "true". The fulfilled situation is either the QoS profile or an Alternative QoS Profile. The default value "false" shall apply, if the attribute is not present and has not been supplied previously.	
medCompN	integer	1	Identifies the media component number, and it contains the ordinal number of the media component.	
medType	MediaType	0..1	Indicates the media type of the service.	
marBwUI	BitRate	0..1	Maximum requested bandwidth for the Uplink.	
marBwDI	BitRate	0..1	Maximum requested bandwidth for the Downlink.	
mirBwUI	BitRate	0..1	Minimum requested bandwidth for the Uplink.	
mirBwDI	BitRate	0..1	Minimum requested bandwidth for the Downlink.	
rTLatencyInd	boolean	0..1	Indicates the service data flow needs to meet the Round-Trip (RT) latency requirement of the service, when it is included and set to "true". The default value is "false" if omitted. (NOTE 4)	RTLatency
pdb	PacketDelBudget	0..1	Indicates an upper bound for the time that a packet may be delayed between the UE and the PSA UPF.	RTLatency
rTLatencyIndCorrelated	RttFlowReference	0..1	Identifies which Media Components contribute to the RT Latency requirement for two service data flows. (NOTE 4)	RTLatency
pduSetQosDI	PduSetQosPara	0..1	Contains the PDU Set QoS parameter(s) which are used to support PDU Set based QoS handling in the downlink.	PDUSetHandling
pduSetQosUI	PduSetQosPara	0..1	Contains the PDU Set QoS Parameter(s) which are used to support PDU Set based QoS handling in the uplink.	PDUSetHandling
l4sInd	UplinkDownlinkSupport	0..1	Provides L4S support information. (NOTE 2)	L4S
protoDescUI	ProtocolDescription	0..1	Uplink Protocol description for PDU Set identification in UE.	PDUSetHandling
protoDescDI	ProtocolDescription	0..1	Downlink Protocol description for PDU Set identification and end of Data burst indication in UPF.	PDUSetHandling PowerSaving

Attribute name	Data type	Cardinality	Description	Applicability
periodUl	DurationMilliSec	0..1	Indicates the time period between the start of the two data bursts in units of milliseconds in Uplink direction.	PowerSaving
periodDl	DurationMilliSec	0..1	Indicates the time period between the start of the two data bursts in units of milliseconds in Downlink direction.	PowerSaving
evSubsc	EventsSubscReqData	0..1	Identifies the events the application subscribes to at creation of a media component. (NOTE 1)	EnQoSMon L4S
<p>NOTE 1: If attribute "evSubsc" is present, one or more of the following IEs within EventsSubscReqData data type may be included: "events", "notifUri", "reqQosMonParams", "qosMon", "qosMonDatRate", "pdvReqMonParams", "pdvMon", "congestMon", "notifCorrelId", "rttMon", "directNotifInd", "avgWndw". In addition, when the attribute "events" is present, only the following Enumeration "AfEvent" may be included: "QOS_MONITORING", "PACK_DEL_VAR", "RT_DELAY_TWO_QOS_FLOWS", "L4S_SUPP".</p> <p>NOTE 2: Within an AsSessionMediaComponent entry, the AF may include either the indication of L4S support within the "l4sInd" attribute or the request for congestion measurements within the "evSubsc" attribute as specified in 3GPP TS 29.514 [52]. The indication of the support of ECN marking for L4S and the request of congestion measurements are mutually exclusive and shall not be present simultaneously.</p> <p>NOTE 3: The attributes "altSerReqs" and "altSerReqsData" are mutually exclusive. Of the two, only the attribute "altSerReqs" may be provided if the attribute "qosReference" is provided, while only the attribute "altSerReqsData" may be provided if the attribute "qosReference" is not provided.</p> <p>NOTE 4: The "rTlatencyInd" attribute and the "rTlatencyIndCorrelId" attribute are mutually exclusive.</p>				

If the "EnQoSMon" feature is supported, and the AF includes the attribute "evSubsc" in the "AsSessionMediaComponent" data type with a subscription to a specific event, then the "events" attribute within the "AsSessionWithQoSSubscription" data type shall not include a subscription to notifications for that specific event. In this case, the NEF shall use the value of the "notifUri" attribute included within the "evSubsc" attribute in the "AsSessionMediaComponent" data type as target URI of the HTTP POST request for that specific event notification.

NOTE: The AF can provide different values per AS session media component for the "notifUri" attribute and/or "notifCorrelId" attribute, e.g. to identify the media component of a received report.

If the "EnQoSMon" feature is supported, and the AF requires the subscription to Round Trip Delay over two QoS flows, then the NF service consumer shall use:

- if the UL and DL flows request the same QoS and the same subscription events, an entry of the "AsSessionMediaComponent" data type and shall include the "evSubsc" attribute with the subscription to Round-Trip delay measurements over two SDFs as described in 3GPP TS 29.514 [52];
- otherwise, an entry of the "AsSessionMediaComponent" data type for the service data flows that require the measurement of the delay in the UL direction and another entry of the "AsSessionMediaComponent" for the service data flows that require the measurement of the delay in the DL direction. Each "AsSessionMediaComponent" entry shall include the "evSubsc" attribute with the subscription to Round-Trip delay measurements over two SDFs and may include the "rttFlowRef" attribute with the shared key for the UL and DL monitored flows and, if needed, an indication of whether the monitored flow direction is the UL or the DL as described in 3GPP TS 29.514 [52].

#### 5.14.2.1.14 Type AsSessionMediaComponentRm

This type represents the AsSessionMediaComponent with the "nullable: true" property. The individual properties of the AsSessionMediaComponentRm data type are also removable. It shall comply with the provisions defined in table 5.14.2.1.14-1.

**Table 5.14.2.1.14-1: Definition of type AsSessionMediaComponentRm**



Attribute name	Data type	Cardinality	Description	Applicability
flowInfos	array(FlowInfo)	0..N	Contains the IP data flow(s) description for a single-modal data flow.	
qosReference	string	0..1	Identifies a pre-defined QoS information.	
altSerReqs	array(string)	0..N	Ordered list of alternative service requirements that include a set of QoS references. The lower the index of the array for a given entry, the higher the priority.(NOTE 3)	
altSerReqsData	array(AlternativeServiceRequirementsData)	0..N	Ordered list of alternative service requirements that include individual QoS parameter sets. The lower the index of the array for a given entry, the higher the priority. (NOTE 3)	
disUeNotif	boolean	0..1	Indicates to disable QoS flow parameters signalling to the UE when the SMF is notified by the NG-RAN of changes in the fulfilled QoS situation when it is included and set to "true". The fulfilled situation is either the QoS profile or an Alternative QoS Profile.	
medCompN	integer	1	Identifies the media component number, and it contains the ordinal number of the media component.	
medType	MediaType	0..1	Indicates the media type of the service.	
marBwUI	BitRateRm	0..1	Maximum requested bandwidth for the Uplink.	
marBwDI	BitRateRm	0..1	Maximum requested bandwidth for the Downlink.	
mirBwUI	BitRateRm	0..1	Minimum requested bandwidth for the Uplink.	
mirBwDI	BitRateRm	0..1	Minimum requested bandwidth for the Downlink.	
rTLatencyInd	boolean	0..1	Indicates the service data flow needs to meet the Round-Trip (RT) latency requirement of the service, when it is included and set to "true".	RTLatency
pdb	PacketDelBudgetRm	0..1	Indicates an upper bound for the time that a packet may be delayed between the UE and the PSA UPF.	RTLatency
rTLatencyIndCorrelated	RttFlowReferenceRm	0..1	Identifies which Media Components contribute to the RT Latency requirement for two service data flows.	RTLatency
pduSetQosDI	PduSetQosParaRm	0..1	Contains the PDU Set QoS parameter(s) which are used to support PDU Set based QoS handling in the downlink.	PDUSetHandling
pduSetQosUI	PduSetQosParaRm	0..1	Contains the PDU Set QoS Parameter(s) which are used to support PDU Set based QoS handling in the uplink.	PDUSetHandling
l4sInd	UplinkDownlinkSupport	0..1	Provides L4S support information. (NOTE 2)	L4S
protoDescUI	ProtocolDescriptionRm	0..1	Uplink Protocol description for PDU Set identification in UE.	PDUSetHandling
protoDescDI	ProtocolDescriptionRm	0..1	Downlink Protocol description for PDU Set identification and end of Data burst indication in UPF.	PDUSetHandling
periodUI	DurationMilliSecRm	0..1	Indicates the time period between the start of the two data bursts in units of milliseconds in Uplink direction.	PowerSaving
periodDI	DurationMilliSecRm	0..1	Indicates the time period between the start of the two data bursts in units of milliseconds in Downlink direction.	PowerSaving

Attribute name	Data type	Cardinality	Description	Applicability
evSubsc	EventsSubscReqDataRm	0..1	Identifies the events the application subscribes to at creation of a media component. (NOTE 1)	EnQoSMon, L4S
NOTE 1: If attribute "evSubsc" is present, one or more of the following IEs within EventsSubscReqDataRm data type may be included: "events", "notifUri", "reqQoSMonParams", "qosMon", "qosMonDatRate", "pdvReqMonParams", "pdvMon", "congestMon", "notifCorrelId", "rttMon", "directNotifInd", "avrgWndw". In addition, when the attribute "events" is present, only the following Enumeration "AfEvent" may be included: "QOS_MONITORING", "PACK_DEL_VAR", "RT_DELAY_TWO_QOS_FLOWS", "L4S_SUPP".				
NOTE 2: Within an AsSessionMediaComponentRm entry, the AF may include either the indication of L4S support within the "l4sInd" attribute or the request for congestion measurements within the "evSubsc" attribute as specified in 3GPP TS 29.514 [52]. An AsSessionMediaComponent entry within the Individual AS Session with Required QoS Subscription resource shall not contain simultaneously both, the indication of L4S support and the subscription to congestion monitoring.				
NOTE 3: The attributes "altSerReqs" and "altSerReqsData" are mutually exclusive. Of the two, only the attribute "altSerReqs" may be provided if the attribute "qosReference" is provided or has been provided before, while only the attribute "altSerReqsData" may be provided if the attribute "qosReference" is not provided or hasn't been provided before.				

If the "EnQoSMon" feature is supported, and the AF includes the attribute "evSubsc" in the "AsSessionMediaComponentRm" data type with a subscription to a specific event, then the "events" attribute within the Individual AS Session with Required QoS Subscription resource shall not include a subscription to notifications for that specific event. In this case, the NEF shall use the value of the "notifUri" attribute included within the "evSubsc" attribute in the "AsSessionMediaComponentRm" data type as target URI of the HTTP POST request for that specific event notification.

NOTE: The AF can provide different values per AS session media component for the "notifUri" attribute and/or "notifCorrelId" attribute, e.g. to identify the media component of a received report.

If the "EnQoSMon" feature is supported, and the AF requires the subscription to Round Trip Delay over two QoS flows, then the NF service consumer shall behave as specified in clause 5.14.2.1.3.

#### 5.14.2.1.15 Type: MultiModalFlows

This type represents a flow information within a single-modal data flow. It shall comply with the provisions defined in table 5.14.2.1.15-1.

**Table 5.14.2.1.15-1: Definition of the type MultiModalFlows**

Attribute name	Data type	Cardinality	Description
medCompN	integer	1	It contains the ordinal number of the single-modal data flow.
flowIds	array(integer)	0..N	Identifies the affected flows within the single-modal data flow (identified by the medCompN attribute). It may be omitted when all flows are affected.

#### 5.14.2.1.16 Type: UeAddInfo

This type represents UEs Address information. It shall comply with the provisions defined in table 5.14.2.1.16-1.

**Table 5.14.2.1.16-1: Definition of the type UeAddInfo**

Attribute name	Data type	Cardinality	Description	Applicability
ueIpAddr	IpAddr	1	Identifies the UE IP address.	
portNumber	Port	0..1	Indicates the UDP or TCP port number associated with the UE IP address as provided in the "ueIpAddr" attribute	

## 5.14.2.2 Referenced simple data types and enumerations

### 5.14.2.2.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses. In addition, data types and enumerations defined in clause 5.2.1 can be referenced.

### 5.14.2.2.2 Simple data types

The simple data types defined in table 5.14.2.2.2-1 shall be supported.

**Table 5.14.2.2.2-1: Simple data types**

Type name	Description

### 5.14.2.2.3 Enumeration: UserPlaneEvent

The enumeration UserPlaneEvent represents the user plane event.

Table 5.14.2.2.3-1: Enumeration UserPlaneEvent

Enumeration value	Description	Applicability (NOTE)
SESSION_TERMINATION	Indicates that Rx session is terminated.	
LOSS_OF_BEARER	Indicates a loss of a bearer. (NOTE 3)	
RECOVERY_OF_BEARER	Indicates a recovery of a bearer. (NOTE 3)	
RELEASE_OF_BEARER	Indicates a release of a bearer. (NOTE 3)	
USAGE_REPORT	Indicates the usage report event.	
FAILED_RESOURCES_ALLOCATION	Indicates the resource allocation is failed.	
SUCCESSFUL_RESOURCES_ALLOCATION	Indicates the resource allocation is successful.	
QOS_GUARANTEED	The QoS targets of one or more SDFs are guaranteed again.	AlternativeQoS_5G, GMEC
QOS_NOT_GUARANTEED	The QoS targets of one or more SDFs are not being guaranteed.	AlternativeQoS_5G, GMEC
QOS_MONITORING	Indicates a QoS monitoring event.	QoSMonitoring_5G, GMEC, ListUE_5G
ACCESS_TYPE_CHANGE	Indicates an Access type change. (NOTE 2)	enNB_5G, GMEC
PLMN_CHG	Indicates a PLMN change. (NOTE 2)	enNB_5G, GMEC
L4S_NOT_AVAILABLE	The ECN marking for L4S of one or more SDFs is not available.	L4S, GMEC
L4S_AVAILABLE	The ECN marking for L4S of one or more SDFs is available again.	L4S, GMEC
BAT_OFFSET_INFO	Indicates the network provided BAT offset and the optionally adjusted periodicity.	EnTSCAC, GMEC
RT_DELAY_TWO_QOS_FLOWS	Indicates round-trip delay on UL and DL flows over two QoS flows. This event may only be subscribed at Application Session Media Component level. I.e., it shall not be included within the "events" attribute of the AsSessionWithQoSSubscription and AsSessionWithQoSSubscriptionPatch data types.	EnQoSMon, GMEC
PACK_DELAY_VAR	Indicates Packet Delay Variation is enabled for the SDF.	EnQoSMon, GMEC
NOTE 1: Properties marked with a feature as defined in clause 5.14.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.		
NOTE 2: The exposure of such network information to the AF needs to be authorized based on the local policy or local configuration.		
NOTE 3: The "LOSS_OF_BEARER", RECOVERY_OF_BEARER, and RELEASE_OF_BEARER only apply to 4G.		

## 5.14.3 Resource structure

### 5.14.3.1 General

All resource URIs of this API should have the following root:

**{apiRoot}/3gpp-as-session-with-qos/v1**

"apiRoot" is set as described in clause 5.2.4. "apiName" shall be set to "3gpp-as-session-with-qos" and "apiVersion" shall be set to "v1" for the version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:

**Table 5.14.3.1-1: Resources and methods overview**

Resource name	Resource URI	HTTP method	Meaning
AS Session with Required QoS Subscriptions	/{scsAsId}/subscriptions	GET	Get all or queried subscription resources for a given SCS/AS.
		POST	Create a new AS session.
Individual AS Session with Required QoS Subscription	/{scsAsId}/subscriptions/{subscriptionId}	GET	Read a subscription resource for a given SCS/AS and a subscription Id.
		PUT	Modify a subscription resource for a given SCS/AS and a subscription Id.
		PATCH	Modify a subscription resource for a given SCS/AS and a subscription Id.
		DELETE	Delete a subscription resource for a given SCS/AS and a subscription Id.

### 5.14.3.2 Resource: AS Session with Required QoS subscriptions

#### 5.14.3.2.1 Introduction

This resource allows the SCS/AS to read all active AS session with required QoS subscription resources, or create a new subscription resource for the SCS/AS.

#### 5.14.3.2.2 Resource definition

Resource URI: {apiRoot}/3gpp-as-session-with-qos/v1/{scsAsId}/subscriptions

This resource shall support the resource URI variables defined in table 5.14.3.2.2-1.

**Table 5.14.3.2.2-1: Resource URI variables for resource "AS Session with Required QoS Subscriptions"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.

#### 5.14.3.2.3 Resource methods

##### 5.14.3.2.3.1 GET

The GET method allows to read all or queried active subscriptions for a given SCS/AS. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.14.3.2.3.1-1 and table 5.14.3.2.3.1-2.

**Table 5.14.3.2.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks	Applicability
ip-addr	array(IpAddr)	0..N	Contains the IP address(es) of the requested UE(s). (NOTE 1, NOTE 2)	enNB
ip-domain	string	0..1	Contains the IPv4 address domain identifier. This query parameter may be present only if the "ip-addr" query parameter is also present and contains at least one array element including an IPv4 address.	enNB
mac-addr	array(MacAddr48)	0..N	Contains the MAC address(es) of the requested UE(s). (NOTE 1, NOTE 2)	enNB
NOTE 1: Either the "ip-addr" query parameter or the "mac-addr" query parameter may be provided at the same time.				
NOTE 2: If multiple array elements are provided within this query parameter, then each array element shall be treated as a separate query parameter.				

**Table 5.14.3.2.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	array(AsSessionWithQoSSubscription)	0..N	200 OK	The subscription information related to the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.14.3.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.14.3.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.14.3.2.3.2 PUT

This HTTP method is not supported for the resource.

## 5.14.3.2.3.3 PATCH

This HTTP method is not supported for the resource.

## 5.14.3.2.3.4 POST

The POST method creates a new subscription resource for a given SCS/AS. The SCS/AS shall initiate the HTTP POST request message and the SCEF shall respond to the message. The SCEF shall construct the URI of the created resource using that URI.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.14.3.2.3.4-1 and table 5.14.3.2.3.4-2.

**Table 5.14.3.2.3.4-1: URI query parameters supported by the POST method on this resource**

Name	Data type	Cardinality	Remarks

**Table 5.14.3.2.3.4-2: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	AsSessionWithQoSSubscription	1	Parameters to create a subscription for an AS session with required QoS for the service requirement.	
Response body	Data type	Cardinality	Response codes	Remarks
	AsSessionWithQoSSubscription	1	201 Created	The subscription was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
	ProblemDetailsAsSessionWithQoS	0..1	403 Forbidden	(NOTE 2)
	ProblemDetails	0..1	500 Internal Server Error	(NOTE 2)

NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

NOTE 2: Failure cases are described in clause 5.14.5.3.

**Table 5.14.3.2.3.4-3: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-as-session-with-qos/v1/{scsAsId}/subscriptions/{subscriptionId}

**Table 5.14.3.2.3.4-4: Headers supported by the 403 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Retry-After	string	M	1	Indicates the time the NF service consumer has to wait before making a new request.

## 5.14.3.2.3.5 DELETE

This HTTP method is not supported for the resource.

5.14.3.3 Resource: Individual AS Session with Required QoS Subscription

5.14.3.3.1 Introduction

This resource allows an SCS/AS to query, update and delete an AS session with required QoS subscription.

5.14.3.3.2 Resource definition

Resource URI: {apiRoot}/3gpp-as-session-with-qos/v1/{scsAsId}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.14.3.3.2-1.

**Table 5.14.3.3.2-1: Resource URI variables for resource "Individual AS Session with Required QoS Subscription"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS of type ScsAsId.
subscriptionId	string	Identifier of the subscription resource of type string. The subscriptionId corresponds to the stage 2 TLTRI.

5.14.3.3.3 Resource methods

5.14.3.3.3.1 GET

The GET method allows to read a subscription resource. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.14.3.3.3.1-1 and table 5.14.3.3.3.1-2.

**Table 5.14.3.3.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks

**Table 5.14.3.3.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	AsSessionWithQoSSubscription	1	200 OK	The subscription information related to the resource URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	

NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.



**Table 5.14.3.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.14.3.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.14.3.3.2 PUT

The PUT method allows changing the service information of an active subscription. The properties "ueIpv4Addr" or "ueIpv6Addr" shall remain unchanged from previously provided value.

This method shall support request and response data structures, and response codes, as specified in the table 5.14.3.3.2-1.

**Table 5.14.3.3.2-1: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	AsSessionWithQoSSubscription	1	Set up AS session with required QoS.	
Response body	Data type	Cardinality	Response codes	Remarks
	AsSessionWithQoSSubscription	1	200 OK	The subscription was modified successfully. The SCEF shall return an updated subscription in the response content.
	none		204 No Content	The subscription was updated successfully.
	none		307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	ProblemDetailsAsSessionWithQoS	0..1	403 Forbidden	(NOTE 2)
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				
NOTE 2: Failure cases are described in clause 5.14.5.3.				

**Table 5.14.3.3.2-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.14.3.3.3.2-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.14.3.3.3.2-4: Headers supported by the 403 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Retry-After	string	M	1	Indicates the time the NF service consumer has to wait before making a new request.

### 5.14.3.3.3.3 PATCH

The PATCH method allows to change the service information of an active subscription.

This method shall support request and response data structures, and response codes, as specified in the table 5.14.3.3.3.3-1.

**Table 5.14.3.3.3.3-1: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	AsSessionWithQoSSubscriptionPatch	1	Partial update of an AS session with required QoS.	
Response body	Data type	Cardinality	Response codes	Remarks
	AsSessionWithQoSSubscription	1	200 OK	The subscription was modified successfully. The SCEF shall return an updated subscription in the response content.
	none		204 No Content	The subscription was modified successfully.
	none		307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	ProblemDetailsAsSessionWithQos	0..1	403 Forbidden	(NOTE 2)
	ProblemDetails	0..1	403 Forbidden	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 also apply.				
NOTE 2: Failure cases are described in clause 5.14.5.3.				

**Table 5.14.3.3.3.3-2: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.14.3.3.3-3: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.14.3.3.3-4: Headers supported by the 403 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Retry-After	string	M	1	Indicates the time the NF service consumer has to wait before making a new request.

5.14.3.3.3.4 POST

This HTTP method is not supported for the resource.

5.14.3.3.3.5 DELETE

The DELETE method deletes the AsSessionWithQoSSubscription resource and terminates the related subscription. The SCS/AS shall initiate the HTTP DELETE request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.14.3.3.3.5-1 and table 5.14.3.3.3.5-2.

**Table 5.14.3.3.3.5-1: URI query parameters supported by the DELETE method on this resource**

Name	Data type	Cardinality	Remarks

**Table 5.14.3.3.3.5-2: Data structures supported by the DELETE request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The subscription was terminated successfully. The response body shall be empty.
	UserPlaneNotificationData	1	200 OK	The subscription was terminated successfully. The user plane notification data shall be included in the response.
	none		307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.	

NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.

**Table 5.14.3.3.3.5-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.14.3.3.3.5-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

#### 5.14.3.4 Void

### 5.14.3A Notifications

#### 5.14.3A.1 General

The notifications provided by the AsSessionWithQoS API are specified in this clause.

**Table 5.14.3A-1: Notifications overview**

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Event Notification	{notificationUri}	POST	Notify the bearer level event(s) from the SCEF to the SCS/AS

#### 5.14.3A.2 Event Notification

##### 5.14.3A.2.1 Description

The Event Notification allows the SCEF to notify the SCS/AS of the bearer level event(s).

##### 5.14.3A.2.2 Target URI

The Callback URI "{notificationUri}" shall be used with the callback URI variables defined in table 5.14.3A.2.2-1.

**Table 5.14.3A.2.2-1: Callback URI variables**

Name	Data type	Definition
notificationUri	Link	Reference provided by the SCS/AS when the SCS/AS requests to sponsor the traffic from the beginning or to become the chargeable party at a later point. This URI shall be provided within the "notificationDestination" attribute in the AsSessionWithQoSSubscription type.

#### 5.14.3A.2.3 Standard Methods

##### 5.14.3A.2.3.1 Notification via POST

The POST method allows to notify SCS/AS of the bearer level event(s) by the SCEF and the SCS/AS shall respond to the message.

This method shall support the request data structures specified in table 5.14.3A.2.3.1-1 and the response data structures and response codes specified in table 5.14.3A.2.3.1-2.

**Table 5.14.3A.2.3.1-1: Data structures supported by the POST Request Body**

Data type	Cardinality	Description
UserPlaneNotificationData	1	Representation of the bearer level notification.

**Table 5.14.3A.2.3.1-2: Data structures supported by the POST Response Body**

Data type	Cardinality	Response codes	Description
none		204 No Content	This case represents a successful notification of bearer level event(s).
none		307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
none		308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.14.3A.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.14.3A.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

#### 5.14.3A.2.3.2 Notification via Websocket

If supported by both SCS/AS and SCEF and successfully negotiated, the UserPlaneNotificationData may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4.

## 5.14.4 Used Features

The table below defines the features applicable to the AsSessionWithQoS API. Those features are negotiated as described in subclause 5.2.7.

**Table 5.14.4-1: Features used by AsSessionWithQoS API**

Feature Number	Feature	Description
1	Notification_websocket	The delivery of notifications over Websocket is supported according to clause 5.2.5.4. This feature requires that the Notification_test_event feature is also supported.
2	Notification_test_event	The testing of notifications connections is supported according to clause 5.2.5.3.
3	EthAsSessionQoS_5G	Setting up required QoS for Ethernet UE. This feature may only be supported in 5G.
4	MacAddressRange_5G	Indicates the support of a set of MAC addresses with a specific range in the traffic filter. This feature may only be supported in 5G.
5	AlternativeQoS_5G	Indicates the support of alternative QoS requirements and the QoS notification (i.e. whether the QoS targets for SDF(s) are not guaranteed or guaranteed again). This feature may only be supported in 5G.
6	QoSMonitoring_5G	Indicates the support of QoS Monitoring functionality and the report for packet delay monitoring. This feature may only be supported in 5G.
7	DisableUENotification_5G	Indicates the support of disabling QoS flow parameters signalling to the UE when the SMF is notified by the NG-RAN of changes in the fulfilled QoS situation. This feature may only be supported in 5G. This feature requires that the AlternativeQoS_5G feature is also supported.
8	TSC_5G	Indicates the support of Time Sensitive Communication. This feature may only be supported in 5G.
9	AppId	Indicates the support of dynamically providing the Application Identifier via the API.
10	ExposureToEAS	This feature indicates the support of direct notification in 5GC. This feature requires that the QoSMonitoring_5G feature is also supported.
11	enNB	Indicates the support of enhancements to the northbound interfaces.
12	AltQoSWithIndParams_5G	This feature indicates the support of provisioning Alternative Service Requirements with individual QoS parameters. This feature requires that the AlternativeQoS_5G feature is also supported.
13	EnEthAsSessionQoS_5G	Indicates the support of required QoS for Ethernet UE, allowing to indicate separately different UL and/or DL Ethernet flows. This feature may only be supported in 5G.
14	enNB_5G	Indicates the support of enhancements to the northbound interfaces and only applicable to 5G.
15	PacketDelayFailureReport	Indicates the support of packet delay failure report as part of QoS Monitoring procedures. This feature requires that QoSMonitoring_5G is supported. This feature may only be supported in 5G.
16	ToSTC_5G	Indicates the support of Type of Service or Traffic Class. This feature may only be supported in 5G.
17	EnTSCAC	Indicates the support of extensions to TSCAC and the RAN feedback for BAT offset and adjusted periodicity. This feature may only be supported in 5G, and requires that the TSC_5G feature is also supported.
18	AltQoSProfilesSupportReport	This feature indicates the support of the report of whether Alternative QoS parameters are supported by the access network. This feature requires that AlternativeQoS_5G and/or AltQoSWithIndParams_5G features are also supported.
19	ExtQoS_5G	This feature indicates the support of extended QoS parameters. This feature may only be supported in 5G.
20	MultiMedia	Indicates the support for multi-modal or multimedia flows for single UE and multiple UE. This feature may only be supported in 5G. This feature may be used in eXtend Reality (XR) use cases.
21	ExtErrors	Indicates the support of additional application errors related to authorization or PDU Session availability.
22	QoSTiming_5G	This feature indicates the support of QoS timing information for the transfer and support of data transmission (e.g., AI/ML transmission). This feature may only be supported in 5G.
23	ListUE_5G	Indicates the support for the list of UEs. This feature may only be supported in 5G.

24	GMEC	<p>This feature indicates the support of Generic Group Management Exposure and Communication related enhancements.</p> <p>The following functionalities are supported:</p> <ul style="list-style-type: none"> <li>- Support AF requested QoS for a UE or group of UE(s) not identified by the UE address(es).</li> </ul> <p>This feature may only be supported in 5G.</p> <p>This feature requires the support of the "QoSMonitoring_5G" and "AltQosWithIndParams_5G" features.</p>
25	PDUSetHandling	<p>This feature indicates the support of PDU Set handling. This feature may be used for eXtended Reality (XR) and interactive media services.</p> <p>This feature may only be supported in 5G.</p>
26	RTLatency	<p>This feature indicates the support of Round-Trip latency. This feature may be used for eXtended Reality (XR) and interactive media services.</p> <p>This feature may only be supported in 5G.</p>
27	EnQoSMon	<p>This feature indicates the support of enhanced QoS monitoring functionality, i.e. the enhancement of packet delay QoS monitoring, and/or, the report of the congestion information, and/or, the RTT delay over two QoS flows, and/or, the data rate information, and/or, the Packet Delay Variation monitoring.</p> <p>This feature requires that QoSMonitoring_5G is supported.</p> <p>In order to support the report of packet delay measurement failure, the PacketDelayFailureReport feature also requires to be supported.</p> <p>This feature may only be supported in 5G.</p>
28	PowerSaving	<p>This feature indicates the support of the Power Saving for different traffic measurement.</p> <p>This feature may only be supported in 5G.</p>
29	L4S	<p>This feature indicates the support of the AF indication of ECN marking for L4S support.</p> <p>This feature may only be supported in 5G.</p>
<p>Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".</p> <p>Description: A clear textual description of the feature.</p>		

## 5.14.5 Error handling

### 5.14.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

### 5.14.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the AsSessionWithQoS API.

### 5.14.5.3 Application Errors

The application errors defined for AsSessionWithQoS API are listed in table 5.14.5.3-1.



**Table 5.14.5.3-1: Application errors**

Application Error	HTTP status code	Description	Applicability
REQUESTED_SERVICE_NOT_AUTHORIZED	403 Forbidden	The service information provided in the request is rejected.	ExtErrors
REQUESTED_SERVICE_TEMPORARILY_NOT_AUTHORIZED	403 Forbidden	The service information provided in the request is temporarily rejected.	ExtErrors
UNAUTHORIZED_SPONSORED_DATA_CONNECTIVITY	403 Forbidden	The request for sponsored data connectivity is not authorized.	ExtErrors
PDU_SESSION_NOT_AVAILABLE	500 Internal Server Error	The PDU session is not found for the provided UE address.	ExtErrors
INVALID_SESSION_UPDATE	403 Forbidden	Indicates that the session is not allowed to be updated since one or more of the received parameters can not be served in current session. The AF can retry with a new session.	TSC_5G, GMEC

## 5.15 MsisdNLessMoSms API

### 5.15.1 Overview

The MsisdNLessMoSms API allows the delivery of MSISDN-less mobile originated SMSs from the SCEF to the SCS/AS. The corresponding JSON schema for the representation of the resources and operations defined by the MsisdNLessMoSms API is provided in its complete form in Annex A.15.

### 5.15.2 Data model

#### 5.15.2.1 Notification data types

##### 5.15.2.1.1 Introduction

This clause defines data structures to be used in notifications.

Table 5.15.2.1.1-1 specifies data types re-used by the MsisdNLessMoSms API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the MsisdNLessMoSms API.

**Table 5.15.2.1.1-1: MsisdNLessMoSms API re-used Data Types**

Data type	Reference	Comments
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.15.4-1.

Table 5.15.2.1.1-2 specifies the data types defined for the MsisdNLessMoSms API.

**Table 5.15.2.1.1-2: MsisdNLessMoSms API specific Data Types**

Data type	Clause defined	Description	Applicability
MsisdNLessMoSmsNotification	5.15.2.1.2	Represents a MSISDN-less MO SMS notification.	
MsisdNLessMoSmsNotificationReply	5.15.2.1.3	Represents a reply to a MSISDN-less MO SMS notification.	

##### 5.15.2.1.2 Type: MsisdNLessMoSmsNotification

This data type represents a MSISDN-less MO SMS, which is sent from the SCEF to the SCS/AS.

**Table 5.15.2.1.2-1: Definition of type MsisdnLessMoSmsNotification**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
supportedFeatures	SupportedFeatures	1	Used to negotiate the supported optional features of the API as described in clause 5.2.7.	
sms	Bytes	1	The MSISDN-less MO SMS containing a short message transfer protocol data unit (TPDU) which is defined in 3GPP TS 23.040 [43] and represents the user data field carried by the short message service relay sub-layer protocol.	
externalId	string	1	External identifier has the form username@realm.	
applicationPort	Port	1	Unsigned integer used to uniquely identify the triggering application addressed in the device, see clause 9.2.3.24.4 in TS 23.040 [43] for further details.	
NOTE: Properties marked with a feature as defined in clause 5.15.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				

### 5.15.2.1.3 Type: MsisdnLessMoSmsNotificationReply

This data type represents a reply to an MSISDN-less MO SMS notification and is sent from the SCS/AS to the SCEF.

**Table 5.15.2.1.3-1: Definition of type MsisdnLessMoSmsNotificationReply**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
supportedFeatures	SupportedFeatures	1	Used to negotiate the supported optional features of the API as described in clause 5.2.7.	
NOTE: Properties marked with a feature as defined in clause 5.3.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				

## 5.15.3 Resource structure

### 5.15.3.1 General

All resource URIs of this API should have the following root:

**{notificationDestination}**

"{notificationDestination}" is determined based on preconfigured information in the SCEF as described in clause 4.4.14.2. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:

**Table 5.15.3.1-1: Resources and methods overview**

Resource name	Resource URI	HTTP method	Meaning
MSISDN-less MO SMS Notification	{notificationDestination}	POST	Deliver a received MSISDN-less MO SMS from the SCEF to the SCS/AS

### 5.15.3.2 MSISDN-less MO SMS Notification

#### 5.15.3.2.1 Introduction

The MSISDN-less MO SMS Notification allows the SCEF to deliver a received MSISDN-less MO SMS to the SCS/AS.

## 5.15.3.2.2 Resource definition

The Callback URI: {notificationDestination} shall support the callback URI variables defined in table 5.15.3.2.2-1.

**Table 5.15.3.2.2-1: Callback URI variables for resource "MSISDN-less MO SMS Notification"**

Name	Data type	Definition
notificationDestination	Link	A URI indicating the notification destination where T8 notification requests shall be delivered to. This URI shall be preconfigured in the SCEF.

## 5.15.3.2.3 Standard methods

## 5.15.3.2.3.1 Notification via POST

The HTTP POST method delivers a received MSISDN-less MO SMS. The SCEF shall initiate the HTTP POST request message and the SCS/AS shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.15.3.2.3.1-1 and table 5.15.3.2.3.1-2.

**Table 5.15.3.2.3.1-1: URI query parameters supported by the POST method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.15.3.2.3.1-2: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	MsisdnLessMoSmsNotification		1	The MSISDN-less MO SMS.
Response body	Data type	Cardinality	Response codes	Remarks
	MsisdnLessMoSmsNotificationReply		200 OK	The MSISDN-less MO SMS is received successfully.
	none	0..1	307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.
none	0..1	308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative SCS/AS where the notification should be sent. Redirection handling is described in clause 5.2.10.	

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.

**Table 5.15.3.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

**Table 5.15.3.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative SCS/AS towards which the notification should be redirected.

## 5.15.4 Used Features

The table below defines the features applicable to the MsisdNLessMoSms API. Those features are negotiated as described in clause 5.2.7.

**Table 5.15.4-1: Features used by MsisdNLessMoSms API**

Feature Number	Feature	Description
Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".		
Description: A clear textual description of the feature.		

## 5.15.5 Error handling

### 5.15.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

### 5.15.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MsisdNLessMoSms API.

### 5.15.5.3 Application Errors

The application errors defined for MsisdNLessMoSms API are listed in table 5.15.5.3-1.

**Table 5.15.5.3-1: Application errors**

Application Error	HTTP status code	Description	Applicability

## 5.16 RacsParameterProvisioning API

### 5.16.1 Overview

The RacsParameterProvisioning API is a RESTful API that allows the SCS/AS to provision manufacturer specific UE radio capability parameters. The RacsParameterProvisioning API defines a set of data models, resources and the related procedures for the creation and management of the parameters. The corresponding JSON schema for the representation of the resources and operations defined by the RacsParameterProvisioning API is provided in its complete form in Annex A.16.

## 5.16.2 Data model

### 5.16.2.1 Resource data types

#### 5.16.2.1.1 Introduction

This clause defines data structures to be used in resource representations.

Table 5.16.2.1.1-1 specifies data types re-used by the RacsParameterProvisioning API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the RacsParameterProvisioning API.

**Table 5.16.2.1.1-1: RacsParameterProvisioning API re-used Data Types**

Data type	Reference	Comments
SupportedFeatures	3GPP TS 29.571 [45]	Used to negotiate the applicability of the optional features defined in table 5.16.4-1.
TypeAllocationCode	3GPP TS 29.571 [45]	Used to signal UE model's IMEI-TAC values in table 5.16.2.1.4-1.

Table 5.16.2.1.1-2 specifies the data types defined for the RacsParameterProvisioning API.

**Table 5.16.2.1.1-2: RacsParameterProvisioning API specific Data Types**

Data type	Clause defined	Description	Applicability
RacsConfiguration	5.16.2.1.4	Represents a single UE radio capability configuration data.	
RacsConfigurationRm	5.16.2.1.6	Represents the same as the RacsConfiguration data type but with the "nullable: true" property.	
RacsFailureCode	5.16.2.2.3	Represents the failure result of UE radio capability provisioning.	
RacsFailureReport	5.16.2.1.3	Represents a radio capability data provisioning failure report.	
RacsProvisioningData	5.16.2.1.2	Represents a UE's radio capability data.	
RacsProvisioningDataPatch	5.16.2.1.5	Represents parameters to request the modification of a UE's radio capability data.	

#### 5.16.2.1.2 Type: RacsProvisioningData

This type represents a UE radio capability data provided by the SCS/AS to the SCEF.

**Table 5.16.2.1.2-1: Definition of type RacsProvisioningData**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
self	Link	0..1	Link to the resource "Individual RACS parameter provisioning". This parameter shall be supplied by the SCEF in HTTP responses.	
supportedFeatures	SupportedFeatures	0..1	Used to negotiate the supported optional features of the API as described in clause 5.2.7. This attribute shall be provided in the POST request and in the response of successful resource creation.	
racsConfigs	map(RacsConfiguration)	1..N	Identifies the configuration related to manufacturer specific UE radio capability. Each element uniquely identifies an RACS configuration for an RACS ID and is identified in the map via the RACS ID as key. The response shall include successfully provisioned RACS data.	
racsReports	map(RacsFailureReport)	0..N	Supplied by the SCEF. Contains the RACS IDs for which the RACS data are not provisioned successfully. Any string value can be used as a key of the map.	
NOTE: Properties marked with a feature as defined in clause 5.16.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				

### 5.16.2.1.3 Type: RacsFailureReport

This type represents a radio capability data provisioning report provided by the SCEF.

**Table 5.16.2.1.3-1: Definition of type RacsFailureReport**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
racsIds	array(string)	1..N	Identifies the RACS ID(s) for which the RACS data are not provisioned successfully.	
failureCode	RacsFailureCode	1	It indicates the failure reason.	
NOTE: Properties marked with a feature as defined in clause 5.16.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.				

### 5.16.2.1.4 Type: RacsConfiguration

This type represents a single UE radio capability configuration data provided by the SCS/AS to the SCEF.

**Table 5.16.2.1.4-1: Definition of type RacsConfiguration**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE 1)
racsId	string	1	The UE radio capability ID provided by the SCS/AS to identify the UE radio capability data. See 3GPP TS 23.003 [14] for the encoding. (NOTE 3)	
racsParamEps	string	0..1	The UE radio capability data in EPS, its encoding shall comply with the UE-CapabilityRAT-ContainerList as defined in clause 6.3.6 of 3GPP TS 36.331 [59]. (NOTE 2, NOTE 4)	
racsParam5Gs	string	0..1	The UE radio capability data in 5GS, its encoding shall comply with the UE-CapabilityRAT-ContainerList as defined in clause 6.3.3 of 3GPP TS 38.331 [60]. (NOTE 2, NOTE 4)	
imeiTacs	array(TypeAllocationCode)	1..N	Related UE model's IMEI-TAC values	

NOTE 1: Properties marked with a feature as defined in clause 5.16.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.  
NOTE 2: At least one of racsParamEps or racsParam5Gs shall be provided.  
NOTE 3: A racsId shall only belong to one "Individual RACS Parameter Provisioning" resource.  
NOTE 4: UTRAN capabilities shall not be included within the "racsParamEps" attribute and/or the "racsParam5Gs" attribute.

#### 5.16.2.1.5 Type: RacsProvisioningDataPatch

This type represents a UE radio capability data provided by the SCS/AS to the SCEF. This structure is used in the PATCH request.

**Table 5.16.2.1.5-1: Definition of type RacsProvisioningDataPatch**

Attribute name	Data type	Cardinality	Description	Applicability (NOTE)
racsConfigs	map(RacsConfigurationRm)	0..N	Identifies the configuration related to manufacturer specific UE radio capability. Each element uniquely identifies an RACS configuration for an RACS ID and is identified in the map via the RACS ID as key.	

NOTE: Properties marked with a feature as defined in clause 5.16.4 are applicable as described in clause 5.2.7. If no features are indicated, the related property applies for all the features.

#### 5.16.2.1.6 Type: RacsConfigurationRm

This type represents a single UE radio capability configuration data provided by the SCS/AS to the SCEF. It is defined with "nullable: true" property.

**Table 5.16.2.1.6-1: Definition of type RacsConfigurationRm**

Attribute name	Data type	Cardinality	Description	Applicability
racsParamEps	string	0..1	The UE radio capability data in EPS, its encoding shall comply with the UE-CapabilityRAT-ContainerList as defined in clause 6.3.6 of 3GPP TS 36.331 [59].	
racsParam5Gs	string	0..1	The UE radio capability data in 5GS, its encoding shall comply with the UE-CapabilityRAT-ContainerList as defined in clause 6.3.3 of 3GPP TS 38.331 [60].	
imeiTacs	array(TypeAllocationCode)	0..N	Related UE model's IMEI-TAC values.	

## 5.16.2.2 Referenced simple data types and enumerations

### 5.16.2.2.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses. In addition, data types and enumerations defined in clause 5.2.1 can be referenced.

### 5.16.2.2.2 Simple data types

The simple data types defined in table 5.16.2.2.2-1 shall be supported.

**Table 5.16.2.2.2-1: Simple data types**

Type name	Description

### 5.16.2.2.3 Enumeration: RacsFailureCode

The enumeration RacsFailureCode represents the failure result of UE radio capability provisioning.

**Table 5.16.2.2.3-1: Enumeration RacsFailureCode**

Enumeration value	Description	Applicability
MALFUNCTION	This value indicates that something functions wrongly in RACS provisioning or the RACS provisioning does not function at all.	
RESOURCE_LIMITATION	This value indicates there is resource limitation for RACS data storage.	
RACS_ID_DUPLICATED	The received RACS identifier(s) are already provisioned.	
OTHER_REASON	Other reason unspecified.	

## 5.16.3 Resource structure

### 5.16.3.1 General

All resource URIs of this API should have the following root:

**{apiRoot}/3gpp-racs-pp/v1**

"apiRoot" is set as described in clause 5.2.4. "apiName" shall be set to "3gpp-racs-pp" and "apiVersion" shall be set to "v1" for the version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

The following resources and HTTP methods are supported for this API:

**Table 5.16.3.1-1: Resources and methods overview**

Resource name	Resource URI	HTTP method	Meaning
RACS Parameter Provisionings	/{scsAsId}/provisionings	GET	Read all RACS parameter provisionings for a given AF
		POST	Create a new RACS parameter provisioning



Individual RACS Parameter Provisioning	/{scsAsId}/provisionings/{provisioningId}	PUT	Modify all properties in an existing RACS parameter provisioning
		PATCH	Modify some properties in an existing RACS parameter provisioning
		GET	Read an existing RACS parameter provisioning
		DELETE	Delete a RACS parameter provisioning

### 5.16.3.2 Resource: RACS Parameter Provisionings

#### 5.16.3.2.1 Introduction

This resource allows an SCS/AS to read all active RACS parameter provisionings or create a new RACS parameter provisioning.

#### 5.16.3.2.2 Resource definition

Resource URI: {apiRoot}/3gpp-racs-pp/v1/{scsAsId}/provisionings

This resource shall support the resource URI variables defined in table 5.16.3.2.2-1.

**Table 5.16.3.2.2-1: Resource URI variables for resource "Parameter Provisioning"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS.

#### 5.16.3.2.3 Resource methods

##### 5.16.3.2.3.1 GET

The GET method allows to read all active RACS parameter provisionings indicated by the resource URI as defined in clause 5.16.3.2.2. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.16.3.2.3.1-1 and table 5.16.3.2.3.1-2.

**Table 5.16.3.2.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.16.3.2.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	array(RacsProvisioningData)	0..N	200 OK	The provisioning information related to the request URI is returned.

	none		307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.				

**Table 5.16.3.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.16.3.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.16.3.2.3.2 PUT

This HTTP method is not supported for the resource.

5.16.3.2.3.3 PATCH

This HTTP method is not supported for the resource.

5.16.3.2.3.4 POST

The POST method creates a new parameter provisioning resource for a given SCS/AS. The SCS/AS shall initiate the HTTP POST request message and the SCEF shall respond to the message. The SCEF shall construct the URI of the created resource.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.16.3.2.3.4-1 and table 5.16.3.2.3.4-2.

**Table 5.16.3.2.3.4-1: URI query parameters supported by the POST method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.16.3.2.3.4-2: Data structures supported by the POST request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	RacsProvisioningData		1	Parameters to create a new provisioning.
Response body	Data type	Cardinality	Response codes	Remarks
	RacsProvisioningData	1	201 Created	The provisioning was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.

	array(RacsFailureReport)	1..N	500 Internal Server Error	The RACS data for all RACS IDs were not provisioned successfully.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 also apply.				

**Table 5.16.3.2.3.4-3: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-racs-pp/v1/{scsAsId}/provisionings/{provisioningId}

5.16.3.2.3.5 DELETE

This HTTP method is not supported for the resource.

5.16.3.3 Resource: Individual RACS Parameter Provisioning

5.16.3.3.1 Introduction

This resource allows an SCS/AS to query, update and delete a parameter provisioning indicated by the resource URI as defined in clause 5.16.3.3.2.

5.16.3.3.2 Resource definition

Resource URI: {apiRoot}/3gpp-racs-pp/v1/{scsAsId}/provisionings/{provisioningId}

This resource shall support the resource URI variables defined in table 5.16.3.3.2-1.

**Table 5.16.3.3.2-1: Resource URI variables for resource "Individual RACS Parameter Provisioning"**

Name	Data type	Definition
apiRoot	string	See clause 5.2.4.
scsAsId	string	Identifier of the SCS/AS of type ScsAsId.
provisioningId	string	Identifier of the provisioning resource of type string.

5.16.3.3.3 Resource methods

5.16.3.3.3.1 GET

The GET method allows to read an active parameter provisioning indicated by the resource URI as defined in clause 5.16.3.3.2. The SCS/AS shall initiate the HTTP GET request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.16.3.3.3.1-1 and table 5.16.3.3.3.1-2.

**Table 5.16.3.3.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	Cardinality	Remarks

**Table 5.16.3.3.3.1-2: Data structures supported by the GET request/response by the resource**

Request body	Data type	Cardinality	Remarks
	none		

Response body	Data type	Cardinality	Response codes	Remarks
	RacsProvisioningData	1	200 OK	The provisioning information related to the request URI is returned.
	none		307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.

NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 also apply.

**Table 5.16.3.3.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.16.3.3.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.16.3.3.3.2 PATCH

The PATCH method shall be used to update some properties in an existing provisioning indicated by the Resource URI as defined in clause 5.16.3.3.2. The SCS/AS shall initiate the HTTP PATCH request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.16.3.3.3.2-1 and table 5.16.3.3.3.2-2.

**Table 5.16.3.3.3.2-1: URI query parameters supported by the PATCH method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.16.3.3.3.2-2: Data structures supported by the PATCH request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	RacsProvisioningDataPatch	1	Partial update an existing parameter provisioning.	
Response body	Data type	Cardinality	Response codes	Remarks
	RacsProvisioningData	1	200 OK	The provisioning data was updated successfully. The SCEF shall return an updated provisioning information in the response.
	none		204 No Content	The provisioning data was updated successfully, and no content is to be sent in the response message body.

	array(RacsFailureReport)	1..N	500 Internal Server Error	The RACS data for all RACS IDs were not provisioned successfully.
	none		307 Temporary Redirect	Temporary redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 also apply.				

**Table 5.16.3.3.3.2-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.16.3.3.3.2-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.16.3.3.3.3 PUT

The PUT method shall be used to update all properties in an existing provisioning indicated by the Resource URI as defined in clause 5.16.3.3.2. The SCS/AS shall initiate the HTTP PUT request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.16.3.3.3.3-1 and table 5.16.3.3.3.3-2.

**Table 5.16.3.3.3.3-1: URI query parameters supported by the PUT method on this resource**

Name	Data type	Cardinality	Remarks
none specified			

**Table 5.16.3.3.3.3-2: Data structures supported by the PUT request/response by the resource**

Request body	Data type	Cardinality	Remarks	
	RacsProvisioningData	1	Replace an existing parameter provisioning.	
Response body	Data type	Cardinality	Response codes	Remarks
	RacsProvisioningData	1	200 OK	The provisioning data was replaced successfully. The SCEF shall return an updated provisioning information in the response.
	none		204 No Content	The existing RACS Parameter Provisioning has been replaced successfully and no content is to be sent in the response message body.

	array(RacsFailureReport)	1..N	500 Internal Server Error	The RACS data for all RACS IDs were not provisioned successfully.
	none		307 Temporary Redirect	Temporary redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 also apply.				

**Table 5.16.3.3.3-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.16.3.3.3-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

5.16.3.3.3.4 POST

This HTTP method is not supported for the resource.

5.16.3.3.3.5 DELETE

The DELETE method deletes an existing provisioning resource "Individual RACS Parameter Provisioning". The SCS/AS shall initiate the HTTP DELETE request message and the SCEF shall respond to the message.

This method shall support the URI query parameters, request and response data structures, and response codes, as specified in the table 5.16.3.3.3.5-1 and table 5.16.3.3.3.5-2.

**Table 5.16.3.3.3.5-1: URI query parameters supported by the DELETE method on this resource**

Name	Data type	Cardinality	Remarks
N/A			

**Table 5.16.3.3.3.5-2: Data structures supported by the DELETE request/response on the resource**

Request body	Data type	Cardinality	Remarks	
	none			
Response body	Data type	Cardinality	Response codes	Remarks
	none		204 No Content	The provisioning was terminated successfully. The response body shall be empty.

	none		307 Temporary Redirect	Temporary redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
	none		308 Permanent Redirect	Permanent redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative SCEF. Redirection handling is described in clause 5.2.10.
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 also apply.				

**Table 5.16.3.3.3.5-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

**Table 5.16.3.3.3.5-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative SCEF.

## 5.16.4 Used Features

The table below defines the features applicable to the RacsParameterProvisioning API. Those features are negotiated as described in clause 5.2.7.

**Table 5.16.4-1: Features used by RacsParameterProvisioning API**

Feature Number	Feature	Description
Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification". Description: A clear textual description of the feature.		

## 5.16.5 Error handling

### 5.16.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6.

In addition, the requirements in the following clauses shall apply.

### 5.16.5.2 Protocol Errors

In this release of the specification, there are no additional protocol errors applicable for the RacsParameterProvisioning API.

### 5.16.5.3 Application Errors

The application errors defined for the RacsParameterProvisioning API are listed in table 5.16.5.3-1.

Table 5.16.5.3-1: Application errors

Application Error	HTTP status code	Description

## 6 Security

TLS shall be used to support the security communication between the SCEF and the SCS/AS over T8 as defined in clause 5.5 of 3GPP TS 33.187 [35]. The access to the SCEF northbound APIs shall be authorized by means of OAuth2 protocol (see IETF RFC 6749 [51]), based on local configuration, using the "Client Credentials" authorization grant. If OAuth2 is used, a client, prior to consuming services offered by the SCEF Northbound APIs, shall obtain a "token" from the authorization server.

## 7 Using Common API Framework

### 7.1 General

When CAPIF is used with the SCEF, the SCEF shall support the following as defined in 3GPP TS 29.222 [48]:

- the API exposing function and related APIs over CAPIF-2/2e and CAPIF-3/3e reference points;
- the API publishing function and related APIs over CAPIF-4/4e reference point;
- the API management function and related APIs over CAPIF-5/5e reference point; and
- at least one of the the security methods for authentication and authorization, and related security mechanisms.

In a centralized deployment as defined in 3GPP TS 23.222 [47], where the CAPIF core function and API provider domain functions are co-located, the interactions between the CAPIF core function and API provider domain functions may be independent of CAPIF-3/3e, CAPIF-4/4e and CAPIF-5/5e reference points.

When CAPIF is used with the SCEF, the SCEF shall register all the features for northbound APIs in the CAPIF Core Function.

### 7.2 Security

When CAPIF is used for external exposure, before invoking the API exposed by the SCEF, the SCS/AS as API invoker shall negotiate the security method (PKI, TLS-PSK or OAUTH2) with CAPIF core function and ensure the SCEF has enough credential to authenticate the SCS/AS (see 3GPP TS 29.222 [48], clause 5.6.2.2 and clause 6.2.2.2).

If PKI or TLS-PSK is used as the selected security method between the AF and the NEF, upon API invocation, the NEF shall retrieve the authorization information from the CAPIF core function as described in 3GPP TS 29.222 [48], clause 5.6.2.4.

As indicated in 3GPP TS 33.122 [53], the access to the T8 APIs may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [51]), using the "Client Credentials" authorization grant, where the CAPIF core function (see 3GPP TS 29.222 [48]) plays the role of the authorization server.

NOTE 1: In this release, only "Client Credentials" authorization grant is supported.

If OAuth2 is used as the selected security method between the SCS/AS and the SCEF, the SCS/AS, prior to consuming services offered by the T8 APIs, shall obtain a "token" from the authorization server, by invoking the Obtain\_Authorization service, as described in 3GPP TS 29.222 [48], clause 5.6.2.3.2.

The T8 APIs do not define any scopes for OAuth2 authorization. It is the SCEF responsibility to check whether the SCS/AS is authorized to use an API based on the "token". Once the SCEF verifies the "token", it shall check whether the NEF identifier in the "token" matches its own published identifier, and whether the API name in the "token"



matches its own published API name. If those checks are passed, the AF has full authority to access any resource or operation for the invoked API.

NOTE 2: The security requirement in the current clause does not apply for the MsisdnLessMoSms API since it is the SCEF initiated interaction with the SCS/AS. How the security scheme works for the MsisdnLessMoSms API is left to configuration.

NOTE 3: For aforementioned security methods, the SCEF needs to apply admission control according to access control policies after performing the authorization checks.

---

# Annex A (normative): OpenAPI representation for the APIs defined in the present document

## A.1 General

This Annex is based on the OpenAPI Specification [27] and provides corresponding representations of all APIs defined in the present specification.

NOTE 1: An OpenAPIs representation embeds JSON Schema representations of HTTP message bodies.

This Annex shall take precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

NOTE 2: The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository that uses the GitLab software version control system (see clause 5B of the 3GPP TR 21.900 [58] and clause 5.3.1 of the 3GPP TS 29.501 [49] for further information).

---

## A.2 Data Types applicable to several APIs

For the purpose of referencing entities in the Open API file defined in this Annex, it shall be assumed that this Open API file is contained in a physical file named "TS29122\_CommonData.yaml".

NOTE: For the purpose of referencing the error status codes in the Open API file defined in this Annex, this Open API file contains all the mandatory status codes as defined in table 5.2.6-1, all the API specific error status codes defined for T8 APIs, in addition, some error status codes not used in the current release of this specification but for the purpose of referencing by other specifications.

```
openapi: 3.0.0
```

```
info:
```

```
  title: TS 29.122 Common Data Types
  version: 1.3.0
  description: |
    Data types applicable to several APIs.
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
```

```
externalDocs:
```

```
  description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'
```

```
paths: {}
```

```
components:
```

```
  schemas:
    SponsorInformation:
      description: Represents a sponsor information.
      type: object
      properties:
        sponsorId:
          type: string
          description: It indicates Sponsor ID.
        aspId:
          type: string
          description: It indicates Application Service Provider ID.
      required:
        - sponsorId
        - aspId
```

```
UsageThreshold:
  description: Represents a usage threshold.
  type: object
  properties:
    duration:
      $ref: '#/components/schemas/DurationSec'
    totalVolume:
      $ref: '#/components/schemas/Volume'
    downlinkVolume:
      $ref: '#/components/schemas/Volume'
    uplinkVolume:
      $ref: '#/components/schemas/Volume'

UsageThresholdRm:
  description: >
    Represents the same as the UsageThreshold data type but with the nullable:true property.
  type: object
  properties:
    duration:
      $ref: '#/components/schemas/DurationSecRm'
    totalVolume:
      $ref: '#/components/schemas/VolumeRm'
    downlinkVolume:
      $ref: '#/components/schemas/VolumeRm'
    uplinkVolume:
      $ref: '#/components/schemas/VolumeRm'
  nullable: true

TimeWindow:
  description: Represents a time window identified by a start time and a stop time.
  type: object
  properties:
    startTime:
      $ref: '#/components/schemas/DateTime'
    stopTime:
      $ref: '#/components/schemas/DateTime'
  required:
    - startTime
    - stopTime

Acknowledgement:
  description: Represents a successful acknowledgement of a notification.
  type: object
  properties:
    details:
      type: string
      description: A human-readable explanation specific to this successful acknowledgement
  required:
    - details

NotificationData:
  description: >
    Represents the information to be conveyed in a bearer level event(s) notification.
  type: object
  properties:
    transaction:
      $ref: '#/components/schemas/Link'
    eventReports:
      type: array
      items:
        $ref: '#/components/schemas/EventReport'
      minItems: 1
      description: Contains the reported event and applicable information
  required:
    - transaction
    - eventReports

EventReport:
  description: Represents an event report.
  type: object
  properties:
    event:
      $ref: '#/components/schemas/Event'
    accumulatedUsage:
      $ref: '#/components/schemas/AccumulatedUsage'
    flowIds:
      type: array
      items:
```

```
    type: integer
    minItems: 1
    description: Identifies the IP flows that were sent during event subscription
    required:
      - event

AccumulatedUsage:
  description: Represents an accumulated usage.
  type: object
  properties:
    duration:
      $ref: '#/components/schemas/DurationSec'
    totalVolume:
      $ref: '#/components/schemas/Volume'
    downlinkVolume:
      $ref: '#/components/schemas/Volume'
    uplinkVolume:
      $ref: '#/components/schemas/Volume'

FlowInfo:
  description: Represents IP flow information.
  type: object
  properties:
    flowId:
      type: integer
      description: Indicates the IP flow identifier.
    flowDescriptions:
      type: array
      items:
        type: string
      description: >
        Indicates the packet filters of the IP flow. Refer to clause 5.3.8 of 3GPP TS 29.214 for
        encoding. It shall contain UL and/or DL IP flow description.
      minItems: 1
      maxItems: 2
    tosTC:
      $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/TosTrafficClass'
  required:
    - flowId

TestNotification:
  description: >
    Represents a notification that can be sent to test whether a chosen notification mechanism
    works.
  type: object
  properties:
    subscription:
      $ref: '#/components/schemas/Link'
  required:
    - subscription

WebsocketNotifConfig:
  description: >
    Represents the configuration information for the delivery of notifications over Websockets.
  type: object
  properties:
    websocketUri:
      $ref: '#/components/schemas/Link'
    requestWebsocketUri:
      type: boolean
      description: Set by the SCS/AS to indicate that the Websocket delivery is requested.

LocationArea:
  description: Represents a user location area.
  type: object
  properties:
    cellIds:
      type: array
      items:
        type: string
      minItems: 1
      description: >
        Indicates a list of Cell Global Identities of the user which identifies the cell the UE
        is registered.
    enodeBIds:
      type: array
      items:
        type: string
```

```

    minItems: 1
    description: Indicates a list of eNodeB identities in which the UE is currently located.
  routingAreaIds:
    type: array
    items:
      type: string
    minItems: 1
    description: >
      Identifies a list of Routing Area Identities of the user where the UE is located.
  trackingAreaIds:
    type: array
    items:
      type: string
    minItems: 1
    description: >
      Identifies a list of Tracking Area Identities of the user where the UE is located.
  geographicAreas:
    type: array
    items:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/GeographicArea'
    minItems: 1
    description: Identifies a list of geographic area of the user where the UE is located.
  civicAddresses:
    type: array
    items:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/CivicAddress'
    minItems: 1
    description: Identifies a list of civic addresses of the user where the UE is located.

LocationArea5G:
  description: Represents a user location area when the UE is attached to 5G.
  type: object
  properties:
    geographicAreas:
      type: array
      items:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/GeographicArea'
      minItems: 0
      description: Identifies a list of geographic area of the user where the UE is located.
    civicAddresses:
      type: array
      items:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/CivicAddress'
      minItems: 0
      description: Identifies a list of civic addresses of the user where the UE is located.
    nwAreaInfo:
      $ref: 'TS29554_Npcf_BDTPolicyControl.yaml#/components/schemas/NetworkAreaInfo'

ProblemDetails:
  description: Represents additional information and details on an error response.
  type: object
  properties:
    type:
      $ref: '#/components/schemas/Uri'
    title:
      type: string
      description: >
        A short, human-readable summary of the problem type. It should not change from
occurrence
        to occurrence of the problem.
    status:
      type: integer
      description: The HTTP status code for this occurrence of the problem.
    detail:
      type: string
      description: A human-readable explanation specific to this occurrence of the problem.
    instance:
      $ref: '#/components/schemas/Uri'
    cause:
      type: string
      description: >
        A machine-readable application error cause specific to this occurrence of the problem.
        This IE should be present and provide application-related error information, if
        available.
    invalidParams:
      type: array
      items:
        $ref: '#/components/schemas/InvalidParam'

```

```
  minItems: 1
  description: >
    Description of invalid parameters, for a request rejected due to invalid parameters.
  supportedFeatures:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
```

```
InvalidParam:
  description: >
    Represents the description of invalid parameters, for a request rejected due to invalid
    parameters.
  type: object
  properties:
    param:
      type: string
      description: Attribute's name encoded as a JSON Pointer, or header's name.
    reason:
      type: string
      description: A human-readable reason, e.g. "must be a positive integer".
  required:
    - param
```

```
PlmnId:
  description: Represents the identifier of a PLMN.
  type: object
  properties:
    mcc:
      $ref: '#/components/schemas/Mcc'
    mnc:
      $ref: '#/components/schemas/Mnc'
  required:
    - mcc
    - mnc
```

```
ConfigResult:
  description: Represents one configuration processing result for a group's members.
  type: object
  properties:
    externalIds:
      type: array
      items:
        $ref: '#/components/schemas/ExternalId'
      minItems: 1
      description: Each element indicates an external identifier of the UE.
    msisdns:
      type: array
      items:
        $ref: '#/components/schemas/Msisdn'
      minItems: 1
      description: >
        Each element identifies the MS internal PSTN/ISDN number allocated for the UE.
    resultReason:
      $ref: '#/components/schemas/ResultReason'
  required:
    - resultReason
  oneOf:
    - required: [externalIds]
    - required: [msisdns]
```

```
Bandwidth:
  type: integer
  minimum: 0
  description: integer indicating a bandwidth in bits per second.
```

```
BdtReferenceId:
  type: string
  description: string identifying a BDT Reference ID as defined in clause 5.3.3 of 3GPP TS
29.154.
```

```
Binary:
  type: string
  description: string with format "binary" as defined in OpenAPI Specification.
```

```
Bytes:
  type: string
  description: >
    String with format "byte" as defined in OpenAPI Specification, i.e, base64-encoded
    characters.
```

```
DayOfWeek:
```

```
type: integer
minimum: 1
maximum: 7
description: >
  integer between and including 1 and 7 denoting a weekday. 1 shall indicate Monday, and the
  subsequent weekdays shall be indicated with the next higher numbers. 7 shall indicate
  Sunday.

DateTime:
format: date-time
type: string
description: string with format "date-time" as defined in OpenAPI.

DateTimeRm:
format: date-time
type: string
description: >
  string with format "date-time" as defined in OpenAPI with "nullable=true" property.
nullable: true

DateTimeRo:
format: date-time
type: string
description: >
  string with format "date-time" as defined in OpenAPI with "readOnly=true" property.
readOnly: true

DurationSec:
type: integer
minimum: 0
description: Unsigned integer identifying a period of time in units of seconds.

DurationSecRm:
type: integer
minimum: 0
description: >
  Unsigned integer identifying a period of time in units of seconds with "nullable=true"
  property.
nullable: true

DurationSecRo:
type: integer
minimum: 0
description: >
  Unsigned integer identifying a period of time in units of seconds with "readOnly=true"
  property.
readOnly: true

DurationMin:
type: integer
format: int32
minimum: 0
description: Unsigned integer identifying a period of time in units of minutes.

ExternalId:
type: string
description: >
  string containing a local identifier followed by "@" and a domain identifier. Both the local
  identifier and the domain identifier shall be encoded as strings that do not contain any "@"
  characters. See Clause 4.6.2 of 3GPP TS 23.682 for more information.

ExternalGroupId:
type: string
description: >
  string containing a local identifier followed by "@" and a domain identifier. Both the local
  identifier and the domain identifier shall be encoded as strings that do not contain any "@"
  characters. See Clauses 4.6.2 and 4.6.3 of 3GPP TS 23.682 for more information.

Ipv4Addr:
type: string
description: >
  string identifying a Ipv4 address formatted in the "dotted decimal" notation as defined in
  IETF RFC 1166.

Ipv6Addr:
type: string
description: >
  string identifying a Ipv6 address formatted according to clause 4 in IETF RFC 5952.
```

The mixed Ipv4 Ipv6 notation according to clause 5 of IETF RFC 5952 shall not be used.

**Ipv4AddrRo:**  
type: string  
description: >  
string identifying a Ipv4 address formatted in the "dotted decimal" notation as defined in IETF RFC 1166, with "readOnly=true" property.  
readOnly: true

**Ipv6AddrRo:**  
type: string  
description: >  
string identifying a Ipv6 address formatted according to clause 4 in IETF RFC 5952, with "readOnly=true" property. The mixed Ipv4 Ipv6 notation according to clause 5 of IETF RFC 5952 shall not be used.  
readOnly: true

**Link:**  
type: string  
description: string formatted according to IETF RFC 3986 identifying a referenced resource.

**LinkRm:**  
type: string  
description: >  
String formatted according to IETF RFC 3986 identifying a referenced resource, but with the nullable property set to true.  
nullable: true

**Mcc:**  
type: string  
description: >  
String encoding a Mobile Country Code part of the PLMN, comprising 3 digits, as defined in 3GPP TS 38.413.

**Mnc:**  
type: string  
description: >  
String encoding a Mobile Network Code part of the PLMN, comprising 2 or 3 digits, as defined in 3GPP TS 38.413.

**Msisdn:**  
type: string  
description: >  
string formatted according to clause 3.3 of 3GPP TS 23.003 that describes an MSISDN.

**Port:**  
type: integer  
description: Unsigned integer with valid values between 0 and 65535.  
minimum: 0  
maximum: 65535

**PortRo:**  
type: integer  
description: >  
Unsigned integer with valid values between 0 and 65535, with "readOnly=true" property.  
minimum: 0  
maximum: 65535  
readOnly: true

**ResourceId:**  
type: string  
description: string chosen by the SCEF to serve as identifier in a resource URI.

**ScsAsId:**  
type: string  
description: string that identifies an SCS/AS.

**TimeOfDay:**  
type: string  
description: >  
String with format partial-time or full-time as defined in clause 5.6 of IETF RFC 3339. Examples, 20:15:00, 20:15:00-08:00 (for 8 hours behind UTC).

**Uri:**  
type: string  
description: string providing an URI formatted according to IETF RFC 3986.

**Volume:**  
type: integer



```
format: int64
minimum: 0
description: Unsigned integer identifying a volume in units of bytes.
```

```
VolumeRm:
  type: integer
  format: int64
  minimum: 0
  description: >
    Unsigned integer identifying a volume in units of bytes with "nullable=true" property.
  nullable: true
```

```
EthFlowInfo:
  description: Represents Ethernet flow information.
  type: object
  properties:
    flowId:
      type: integer
      description: Indicates the Ethernet flow identifier.
    ethFlowDescriptions:
      type: array
      items:
        $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/EthFlowDescription'
      description: >
        Indicates the packet filters of the Ethernet flow. It shall contain UL and/or DL
        Ethernet flow description.
      minItems: 1
      maxItems: 2
  required:
    - flowId
```

```
Event:
  anyOf:
  - type: string
  enum:
    - SESSION_TERMINATION
    - LOSS_OF_BEARER
    - RECOVERY_OF_BEARER
    - RELEASE_OF_BEARER
    - USAGE_REPORT
    - FAILED_RESOURCES_ALLOCATION
    - SUCCESSFUL_RESOURCES_ALLOCATION
  - type: string
  description: >
    This string provides forward-compatibility with future
    extensions to the enumeration and is not used to encode
    content defined in the present version of this API.
  description: |
    Represents the event reported by the SCEF.
    Possible values are:
    - SESSION_TERMINATION: Indicates that Rx session is terminated.
    - LOSS_OF_BEARER : Indicates a loss of a bearer.
    - RECOVERY_OF_BEARER: Indicates a recovery of a bearer.
    - RELEASE_OF_BEARER: Indicates a release of a bearer.
    - USAGE_REPORT: Indicates the usage report event.
    - FAILED_RESOURCES_ALLOCATION: Indicates the resource allocation is failed.
    - SUCCESSFUL_RESOURCES_ALLOCATION: Indicates the resource allocation is successful.
```

```
ResultReason:
  anyOf:
  - type: string
  enum:
    - ROAMING_NOT_ALLOWED
    - OTHER_REASON
  - type: string
  description: >
    This string provides forward-compatibility with future extensions to the enumeration
    and is not used to encode content defined in the present version of this API.
  description: |
    Represents a failure result reason.
    Possible values are:
    - ROAMING_NOT_ALLOWED: Identifies the configuration parameters are not allowed by roaming
    agreement.
    - OTHER_REASON: Identifies the configuration parameters are not configured due to other
    reason.
```

```
#
# HTTP responses
#
```

```
responses:
  '307':
    description: Temporary Redirect
    headers:
      Location:
        description: 'An alternative URI of the resource.'
        required: true
        schema:
          type: string
  '308':
    description: Permanent Redirect
    headers:
      Location:
        description: 'An alternative URI of the resource.'
        required: true
        schema:
          type: string
  '400':
    description: Bad request
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  '401':
    description: Unauthorized
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  '403':
    description: Forbidden
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  '404':
    description: Not Found
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  '406':
    description: Not Acceptable
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  '409':
    description: Conflict
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  '411':
    description: Length Required
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  '412':
    description: Precondition Failed
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  '413':
    description: Content Too Large
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  '414':
    description: URI Too Long
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  '415':
```

```

    description: Unsupported Media Type
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  '429':
    description: Too Many Requests
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  '500':
    description: Internal Server Error
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  '503':
    description: Service Unavailable
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetails'
  default:
    description: Generic Error

```

---

## A.3 MonitoringEvent API

openapi: 3.0.0

info:

```

title: 3gpp-monitoring-event
version: 1.3.0
description: |
  API for Monitoring Event.
  © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
  All rights reserved.

```

externalDocs:

```

description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'

```

security:

```

- {}
- oAuth2ClientCredentials: []

```

servers:

```

- url: '{apiRoot}/3gpp-monitoring-event/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.

```

paths:

```

/{scsAsId}/subscriptions:
  get:
    summary: Read all or queried active subscriptions for the SCS/AS.
    operationId: FetchAllMonitoringEventSubscriptions
    tags:
      - Monitoring Event Subscriptions
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of the SCS/AS
        required: true
        schema:
          type: string
      - name: ip-addr
        in: query
        description: The IP address(es) of the requested UE(s).
        required: false
        content:
          application/json:
            schema:
              type: array
              items:

```

```

        $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
        minItems: 1
- name: ip-domain
  in: query
  description: >
    The IPv4 address domain identifier. The attribute may only be provided if IPv4 address
    is included in the ip-addr query parameter.
  required: false
  schema:
    type: string
- name: mac-addr
  in: query
  description: The MAC address(es) of the requested UE(s).
  required: false
  schema:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
    minItems: 1
responses:
  '200':
    description: OK (Successful get all or queried active subscriptions for the SCS/AS)
    content:
      application/json:
        schema:
          type: array
          items:
            $ref: '#/components/schemas/MonitoringEventSubscription'
          minItems: 0
          description: Monitoring event subscriptions
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

post:
  summary: Creates a new subscription resource for monitoring event notification.
  operationId: CreateMonitoringEventSubscription
  tags:
    - Monitoring Event Subscriptions
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS
      required: true
      schema:
        type: string
  requestBody:
    description: Subscription for notification about monitoring event
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/MonitoringEventSubscription'
  callbacks:
    notificationDestination:
      '{$request.body#/notificationDestination}':
        post:
          requestBody: # contents of the callback message
            required: true

```

```

    content:
      application/json:
        schema:
          $ref: '#/components/schemas/MonitoringNotification'
  responses:
    '204':
      description: No Content (successful notification)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  UserConsentRevocationNotif:
    '{ $request.body#/revocationNotifUri }':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/ConsentRevocNotif'
  responses:
    '204':
      description: No Content (successful notification).
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  responses:
    '201':
      description: Created (Successful creation of subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MonitoringEventSubscription'

```

```

headers:
  Location:
    description: 'Contains the URI of the newly created resource'
    required: true
    schema:
      type: string
'200':
  description: The operation is successful and immediate report is included.
  content:
    application/json:
      schema:
        oneOf:
          - $ref: '#/components/schemas/MonitoringEventReport'
          - $ref: '#/components/schemas/MonitoringEventReports'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{scsAsId}/subscriptions/{subscriptionId}:
get:
  summary: Read an active subscriptions for the SCS/AS and the subscription Id.
  operationId: FetchIndMonitoringEventSubscription
  tags:
    - Individual Monitoring Event Subscription
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true
      schema:
        type: string
  responses:
    '200':
      description: OK (Successful get the active subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MonitoringEventSubscription'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Updates/replaces an existing subscription resource.
  operationId: UpdateIndMonitoringEventSubscription
  tags:
    - Individual Monitoring Event Subscription
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true
      schema:
        type: string
  requestBody:
    description: Parameters to update/replace the existing subscription
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/MonitoringEventSubscription'
  responses:
    '200':
      description: OK (Successful update of the subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MonitoringEventSubscription'
    '204':
      description: No Content (Successful update of the subscription)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

patch:
  summary: Modifies an existing subscription of monitoring event.
  operationId: ModifyIndMonitoringEventSubscription
  tags:
    - Individual Monitoring Event Subscription
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS.

```

```

    required: true
    schema:
      type: string
  - name: subscriptionId
    in: path
    description: Identifier of the subscription resource.
    required: true
    schema:
      type: string
requestBody:
  description: >
    This is used for PATCH request for partial cancellation and/or partial addition of certain
    UE(s) within an active group.
  required: true
  content:
    application/json-patch+json:
      schema:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/PatchItem'
        minItems: 1
responses:
  '204':
    description: The resource was modified successfully.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes an already existing monitoring event subscription.
  operationId: DeleteIndMonitoringEventSubscription
  tags:
    - Individual Monitoring Event Subscription
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true
      schema:
        type: string
  responses:
    '204':
      description: No Content (Successful deletion of the existing subscription)
    '200':
      description: OK (Successful deletion of the existing subscription)
      content:
        application/json:
          schema:
            type: array

```



```

    items:
      $ref: '#/components/schemas/MonitoringEventReport'
    minItems: 1
    description: >
      The subscription was terminated successfully, the monitoring event report(s)
      shall be included if received.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

```

```

schemas:
  MonitoringEventSubscription:
    description: Represents a subscription to event(s) monitoring.
    type: object
    properties:
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      mtcProviderId:
        type: string
        description: Identifies the MTC Service Provider and/or MTC Application.
      appIds:
        type: array
        items:
          type: string
          description: Identifies the Application Identifier(s)
          minItems: 1
      externalId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
      msisdns:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
      addedExternalIds:
        type: array
        items:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
        minItems: 1
        description: Indicates the added external Identifier(s) within the active group.
      addedMsisdns:
        type: array
        items:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
        minItems: 1
        description: Indicates the added MSISDN(s) within the active group.
      excludedExternalIds:
        type: array
        items:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
        minItems: 1
        description: Indicates cancellation of the external Identifier(s) within the active group.
      excludedMsisdns:
        type: array

```

```
items:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
minItems: 1
description: Indicates cancellation of the MSISDN(s) within the active group.
externalGroupId:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
addExtGroupId:
  type: array
  items:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
  minItems: 2
ipv4Addr:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv4Addr'
ipv6Addr:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv6Addr'
dnn:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
notificationDestination:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
requestTestNotification:
  type: boolean
  description: >
    Set to true by the SCS/AS to request the SCEF to send a test notification
    as defined in clause 5.2.5.3. Set to false by the SCS/AS indicates not request SCEF to
    send a test notification, default false if omitted otherwise.
websockNotifConfig:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsockNotifConfig'
monitoringType:
  $ref: '#/components/schemas/MonitoringType'
maximumNumberOfReports:
  type: integer
  minimum: 1
  description: >
    Identifies the maximum number of event reports to be generated by the HSS, MME/SGSN
    as specified in clause 5.6.0 of 3GPP TS 23.682.
monitorExpireTime:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
repPeriod:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
groupReportGuardTime:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
maximumDetectionTime:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
reachabilityType:
  $ref: '#/components/schemas/ReachabilityType'
maximumLatency:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
maximumResponseTime:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
suggestedNumberOfDlPackets:
  type: integer
  minimum: 0
  description: >
    If "monitoringType" is "UE_REACHABILITY", this parameter may be included to identify
    the number of packets that the serving gateway shall buffer in case that
    the UE is not reachable.
idleStatusIndication:
  type: boolean
  description: >
    If "monitoringType" is set to "UE_REACHABILITY" or "AVAILABILITY_AFTER_DDN_FAILURE",
    this parameter may be included to indicate the notification of when a UE, for which PSM
    is enabled, transitions into idle mode. "true" indicates enabling of notification;
    "false" indicate no need to notify. Default value is "false" if omitted.
locationType:
  $ref: '#/components/schemas/LocationType'
accuracy:
  $ref: '#/components/schemas/Accuracy'
minimumReportInterval:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
maxRptExpireIntvl:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
samplingInterval:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
reportingLocEstInd:
  type: boolean
  description: >
    Indicates whether to request the location estimate for event reporting. If
    "monitoringType" is "LOCATION_REPORTING", this parameter may be included to indicate
```

whether event reporting requires the location information. If set to true, the location estimation information shall be included in event reporting. If set to "false", indicates the location estimation information shall not be included in event reporting. Default "false" if omitted.

linearDistance:  
 \$ref: 'TS29572\_Nlmf\_Location.yaml#/components/schemas/LinearDistance'

locQoS:  
 \$ref: 'TS29572\_Nlmf\_Location.yaml#/components/schemas/LocationQoS'

svcId:  
 \$ref: 'TS29515\_Ngmlc\_Location.yaml#/components/schemas/ServiceIdentity'

ldrType:  
 \$ref: 'TS29572\_Nlmf\_Location.yaml#/components/schemas/LdrType'

velocityRequested:  
 \$ref: 'TS29572\_Nlmf\_Location.yaml#/components/schemas/VelocityEngine'

maxAgeOfLocEst:  
 \$ref: 'TS29572\_Nlmf\_Location.yaml#/components/schemas/AgeOfLocationEstimate'

locTimeWindow:  
 \$ref: 'TS29122\_CommonData.yaml#/components/schemas/TimeWindow'

supportedGADShapes:  
 type: array  
 items:  
 \$ref: 'TS29572\_Nlmf\_Location.yaml#/components/schemas/SupportedGADShapes'

codeWord:  
 \$ref: 'TS29515\_Ngmlc\_Location.yaml#/components/schemas/CodeWord'

upLocRepIndAf:  
 description: >  
 Indicates whether location reporting over user plane is requested or not.  
 "true" indicates the location reporting over user plane is requested.  
 "false" indicates the location reporting over user plane is not requested.  
 Default value is "false" if omitted.  
 type: boolean  
 default: false

upLocRepAddrAf:  
 \$ref: '#/components/schemas/UpLocRepAddrAfRm'

associationType:  
 \$ref: '#/components/schemas/AssociationType'

plmnIndication:  
 type: boolean  
 description: >  
 If "monitoringType" is "ROAMING\_STATUS", this parameter may be included to indicate the notification of UE's Serving PLMN ID. Value "true" indicates enabling of notification; "false" indicates disabling of notification. Default value is "false" if omitted.

locationArea:  
 \$ref: 'TS29122\_CommonData.yaml#/components/schemas/LocationArea'

locationArea5G:  
 \$ref: 'TS29122\_CommonData.yaml#/components/schemas/LocationArea5G'

dddTraDescriptors:  
 type: array  
 items:  
 \$ref: 'TS29571\_CommonData.yaml#/components/schemas/DddTrafficDescriptor'

minItems: 1

dddStati:  
 type: array  
 items:  
 \$ref: 'TS29571\_CommonData.yaml#/components/schemas/DlDataDeliveryStatus'

minItems: 1

apiNames:  
 type: array  
 items:  
 type: string  
 minItems: 1

monitoringEventReport:  
 \$ref: '#/components/schemas/MonitoringEventReport'

snssai:  
 \$ref: 'TS29571\_CommonData.yaml#/components/schemas/Snssai'

tgtNsThreshold:  
 \$ref: 'TS29571\_CommonData.yaml#/components/schemas/SACInfo'

nsRepFormat:  
 \$ref: '#/components/schemas/SACRepFormat'

afServiceId:  
 type: string

immediateRep:  
 type: boolean  
 description: >  
 Indicates whether an immediate reporting is requested or not.  
 "true" indicate an immediate reporting is requested.  
 "false" indicate an immediate reporting is not requested.  
 Default value "false" if omitted.

```

uavPolicy:
  $ref: '#/components/schemas/UavPolicy'
sesEstInd:
  type: boolean
  description: >
    Set to true by the SCS/AS so that only UAV's with "PDU session established for DNN(s)
    subject to aerial service" are to be listed in the Event report. Set to false or default
    false if omitted otherwise.
subType:
  $ref: '#/components/schemas/SubType'
addnMonTypes:
  type: array
  items:
    $ref: '#/components/schemas/MonitoringType'
addnMonEventReports:
  type: array
  items:
    $ref: '#/components/schemas/MonitoringEventReport'
ueIpAddr:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
ueMacAddr:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
revocationNotifUri:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/Uri'
reqRangSlRes:
  type: array
  items:
    $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/RangingSlResult'
  minItems: 1
relatedUes:
  type: object
  additionalProperties:
    $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/RelatedUe'
  minProperties: 1
  description: >
    Contains a list of the related UE(s) for the ranging and sidelink positioning and the
    corresponding information.
    The key of the map shall be a any unique string set to the value.
required:
  - notificationDestination
  - monitoringType
anyOf:
  - required: [maximumNumberOfReports]
  - required: [monitorExpireTime]

MonitoringNotification:
  description: Represents an event monitoring notification.
  type: object
  properties:
    subscription:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    configResults:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ConfigResult'
      minItems: 1
      description: Each element identifies a notification of grouping configuration result.
    monitoringEventReports:
      type: array
      items:
        $ref: '#/components/schemas/MonitoringEventReport'
      minItems: 1
      description: Monitoring event reports.
    addedExternalIds:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
      minItems: 1
      description: >
        Identifies the added external Identifier(s) within the active group via
        the "externalGroupId" attribute within the MonitoringEventSubscription data type.
    addedMsisdns:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
      minItems: 1
      description: >
        Identifies the added MSISDN(s) within the active group via the "externalGroupId"

```

```

    attribute within the MonitoringEventSubscription data type.
cancelExternalIds:
  type: array
  items:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
  minItems: 1
  description: >
    Identifies the cancelled external Identifier(s) within the active group via
    the "externalGroupId" attribute within the MonitoringEventSubscription data type.
cancelMsisdns:
  type: array
  items:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
  minItems: 1
  description: >
    Identifies the cancelled MSISDN(s) within the active group via the "externalGroupId"
    attribute within the MonitoringEventSubscription data type.
cancelInd:
  type: boolean
  description: >
    Indicates whether to request to cancel the corresponding monitoring subscription.
    Set to false or omitted otherwise.
appliedParam:
  $ref: '#/components/schemas/AppliedParameterConfiguration'
required:
  - subscription

MonitoringEventReport:
  description: Represents an event monitoring report.
  type: object
  properties:
    imeiChange:
      $ref: '#/components/schemas/AssociationType'
    externalId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
    appId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationId'
    pduSessInfo:
      $ref: 'TS29523_Npcf_EventExposure.yaml#/components/schemas/PduSessionInformation'
    idleStatusInfo:
      $ref: '#/components/schemas/IdleStatusInfo'
    locationInfo:
      $ref: '#/components/schemas/LocationInfo'
    locFailureCause:
      $ref: '#/components/schemas/LocationFailureCause'
    lossOfConnectReason:
      type: integer
      description: >
        If "monitoringType" is "LOSS_OF_CONNECTIVITY", this parameter shall be included
        if available to identify the reason why loss of connectivity is reported.
        Refer to 3GPP TS 29.336 clause 8.4.58.
    unavailPerDur:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
    maxUEAvailabilityTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
    msisdn:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
    monitoringType:
      $ref: '#/components/schemas/MonitoringType'
    uePerLocationReport:
      $ref: '#/components/schemas/UePerLocationReport'
    plmnId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/PlmnId'
    reachabilityType:
      $ref: '#/components/schemas/ReachabilityType'
    roamingStatus:
      type: boolean
      description: >
        If "monitoringType" is "ROAMING_STATUS", this parameter shall be set to "true"
        if the new serving PLMN is different from the HPLMN. Set to false or
        omitted otherwise.
    failureCause:
      $ref: '#/components/schemas/FailureCause'
    eventTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
    pdnConnInfoList:
      type: array
      items:

```

```

    $ref: '#/components/schemas/PdnConnectionInformation'
  minItems: 1
  dddStatus:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DlDataDeliveryStatus'
  dddTrafDescriptor:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DddTrafficDescriptor'
  maxWaitTime:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
  apiCaps:
    type: array
    items:
      $ref: '#/components/schemas/ApiCapabilityInfo'
    minItems: 0
  nSStatusInfo:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/SACEventStatus'
  afServiceId:
    type: string
  servLevelDevId:
    type: string
  description: >
    If "monitoringType" is "AREA_OF_INTEREST", this parameter may be included
    to identify the UAV.
  uavPresInd:
    type: boolean
  description: >
    If "monitoringType" is "AREA_OF_INTEREST", this parameter shall be set to true
    if the specified UAV is in the monitoring area. Set to false or omitted otherwise.
  groupMembListChanges:
    $ref: '#/components/schemas/GroupMembListChanges'
  sessInactiveTime:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
  trafficInfo:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/TrafficInformation'
  required:
    - monitoringType

MonitoringEventReports:
  description: Represents a set of event monitoring reports.
  type: object
  properties:
    monitoringEventReports:
      type: array
      items:
        $ref: '#/components/schemas/MonitoringEventReport'
      minItems: 1
  required:
    - monitoringEventReports

IdleStatusInfo:
  description: Represents the information relevant to when the UE transitions into idle mode.
  type: object
  properties:
    activeTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
    edrxCycleLength:
      format: float
      type: number
      minimum: 0
    suggestedNumberOfDlPackets:
      type: integer
      minimum: 0
    description: >
      Identifies the number of packets shall be buffered in the serving gateway.
      It shall be present if the idle status indication is requested by the SCS/AS
      with "idleStatusIndication" in the "monitoringEventSubscription" sets to "true".
    idleStatusTimestamp:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
    periodicAUTimer:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'

UePerLocationReport:
  description: Represents the number of UEs found at the indicated location.
  type: object
  properties:
    ueCount:
      type: integer
      minimum: 0
      description: Identifies the number of UEs.
    externalIds:

```

```

    type: array
    items:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
    minItems: 1
    description: Each element uniquely identifies a user.
  msisdns:
    type: array
    items:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
    minItems: 1
    description: Each element identifies the MS internal PSTN/ISDN number allocated for a UE.
  servLevelDevIds:
    type: array
    items:
      type: string
    minItems: 1
    description: Each element uniquely identifies a UAV.
  required:
    - ueCount

LocationInfo:
  description: Represents the user location information.
  type: object
  properties:
    ageOfLocationInfo:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationMin'
    cellId:
      type: string
      description: >
        Indicates the Cell Global Identification of the user which identifies the cell the UE
        is registered.
    enodeBId:
      type: string
      description: Indicates the eNodeB in which the UE is currently located.
    routingAreaId:
      type: string
      description: Identifies the Routing Area Identity of the user where the UE is located.
    trackingAreaId:
      type: string
      description: Identifies the Tracking Area Identity of the user where the UE is located.
    plmnId:
      type: string
      description: Identifies the PLMN Identity of the user where the UE is located.
    twanId:
      type: string
      description: Identifies the TWAN Identity of the user where the UE is located.
    userLocation:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
    geographicArea:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/GeographicArea'
    civicAddress:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/CivicAddress'
    positionMethod:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/PositioningMethod'
    qosFulfilInd:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/AccuracyFulfilmentIndicator'
    ueVelocity:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/VelocityEstimate'
    ldrType:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/LdrType'
    achievedQos:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/MinorLocationQoS'
    relAppLayerId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationlayerId'
    rangeDirection:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/RangeDirection'
    twoDRelLoc:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/2DRelativeLocation'
    threeDRelLoc:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/3DRelativeLocation'
    relVelocity:
      $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/VelocityEstimate'
    upCumEvtRep:
      $ref: '#/components/schemas/UpCumEvtRep'

FailureCause:
  description: Represents the reason of communication failure.
  type: object

```

```

properties:
  bssgpCause:
    type: integer
    description: >
      Identifies a non-transparent copy of the BSSGP cause code. Refer to 3GPP TS 29.128.
  causeType:
    type: integer
    description: Identify the type of the S1AP-Cause. Refer to 3GPP TS 29.128.
  gmmCause:
    type: integer
    description: >
      Identifies a non-transparent copy of the GMM cause code. Refer to 3GPP TS 29.128.
  ranapCause:
    type: integer
    description: >
      Identifies a non-transparent copy of the RANAP cause code. Refer to 3GPP TS 29.128.
  ranNasCause:
    type: string
    description: >
      Indicates RAN and/or NAS release cause code information, TWAN release cause code
      information or untrusted WLAN release cause code information. Refer to 3GPP TS 29.214.
  slApCause:
    type: integer
    description: >
      Identifies a non-transparent copy of the S1AP cause code. Refer to 3GPP TS 29.128.
  smCause:
    type: integer
    description: >
      Identifies a non-transparent copy of the SM cause code. Refer to 3GPP TS 29.128.

PdnConnectionInformation:
description: Represents the PDN connection information of the UE.
type: object
properties:
  status:
    $ref: '#/components/schemas/PdnConnectionStatus'
  apn:
    type: string
    description: >
      Identify the APN, it is depending on the SCEF local configuration whether or
      not this attribute is sent to the SCS/AS.
  pdnType:
    $ref: '#/components/schemas/PdnType'
  interfaceInd:
    $ref: '#/components/schemas/InterfaceIndication'
  ipv4Addr:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv4Addr'
  ipv6Addrs:
    type: array
    items:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv6Addr'
    minItems: 1
  macAddrs:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
    minItems: 1
required:
- status
- pdnType

AppliedParameterConfiguration:
description: Represents the parameter configuration applied in the network.
type: object
properties:
  externalIds:
    type: array
    items:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
    minItems: 1
    description: Each element uniquely identifies a user.
  msisdns:
    type: array
    items:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
    minItems: 1
    description: Each element identifies the MS internal PSTN/ISDN number allocated for a UE.
maximumLatency:

```



```
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
  maximumResponseTime:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
  maximumDetectionTime:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'

ApiCapabilityInfo:
  description: Represents the availability information of supported API.
  type: object
  properties:
    apiName:
      type: string
    suppFeat:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  required:
    - apiName
    - suppFeat

UavPolicy:
  description: >
    Represents the policy information included in the UAV presence monitoring request.
  type: object
  properties:
    uavMoveInd:
      type: boolean
    revokeInd:
      type: boolean
  required:
    - uavMoveInd
    - revokeInd

ConsentRevocNotif:
  description: >
    Represents the user consent revocation information conveyed in a user consent
    revocation notification.
  type: object
  properties:
    subscriptionId:
      type: string
    consentsRevoked:
      type: array
      items:
        $ref: '#/components/schemas/ConsentRevoked'
      minItems: 1
  required:
    - subscriptionId
    - consentsRevoked

ConsentRevoked:
  description: Represents the information related to a revoked user consent.
  type: object
  properties:
    ucPurpose:
      $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/UcPurpose'
    externalId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
    msisdn:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
  required:
    - ucPurpose
  oneOf:
    - required: [externalId]
    - required: [msisdn]

GroupMembListChanges:
  description: Represents information on the change(s) to a group's members list.
  type: object
  properties:
    addedUEs:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      minItems: 1
    removedUEs:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      minItems: 1
```

```

anyOf:
- required: [addedUEs]
- required: [removedUEs]

```

```

UpLocRepAddrAfRm:
description: Represents the user plane addressing information.
type: object
properties:
  ipv4Addrs:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
    minItems: 1
  ipv6Addrs:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Addr'
    minItems: 1
  fqdn:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Fqdn'
nullable: true
anyOf:
- required: [ipv4Addrs]
- required: [ipv6Addrs]
- required: [fqdn]

```

```

UpCumEvtRep:
description: Represents the cumulative event report.
type: object
properties:
  upLocRepStat:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'

```

```

#
# ENUMS
#

```

```

MonitoringType:
anyOf:
- type: string
  enum:
    - LOSS_OF_CONNECTIVITY
    - UE_REACHABILITY
    - LOCATION_REPORTING
    - CHANGE_OF_IMSI_IMEI_ASSOCIATION
    - ROAMING_STATUS
    - COMMUNICATION_FAILURE
    - AVAILABILITY_AFTER_DDN_FAILURE
    - NUMBER_OF_UES_IN_AN_AREA
    - PDN_CONNECTIVITY_STATUS
    - DOWNLINK_DATA_DELIVERY_STATUS
    - API_SUPPORT_CAPABILITY
    - NUM_OF_REGD_UES
    - NUM_OF_ESTD_PDU_SESSIONS
    - AREA_OF_INTEREST
    - GROUP_MEMBER_LIST_CHANGE
    - APPLICATION_START
    - APPLICATION_STOP
    - SESSION_INACTIVITY_TIME
    - TRAFFIC_VOLUME
    - UL_DL_DATA_RATE
- type: string
  description: >
    This string provides forward-compatibility with future
    extensions to the enumeration but is not used to encode
    content defined in the present version of this API.
  description: |
    Represents a monitoring event type.
    Possible values are
    - LOSS_OF_CONNECTIVITY: The SCS/AS requests to be notified when the 3GPP network detects
      that the UE is no longer reachable for signalling or user plane communication
    - UE_REACHABILITY: The SCS/AS requests to be notified when the UE becomes reachable for
      sending either SMS or downlink data to the UE
    - LOCATION_REPORTING: The SCS/AS requests to be notified of the current location or
      the last known location of the UE
    - CHANGE_OF_IMSI_IMEI_ASSOCIATION: The SCS/AS requests to be notified when the association
      of an ME (IMEI(SV)) that uses a specific subscription (IMSI) is changed
    - ROAMING_STATUS: The SCS/AS queries the UE's current roaming status and requests to get

```

- notified when the status changes
- COMMUNICATION\_FAILURE: The SCS/AS requests to be notified of communication failure events
- AVAILABILITY\_AFTER\_DDN\_FAILURE: The SCS/AS requests to be notified when the UE has become available after a DDN failure
- NUMBER\_OF\_UES\_IN\_AN\_AREA: The SCS/AS requests to be notified the number of UEs in a given geographic area
- PDN\_CONNECTIVITY\_STATUS: The SCS/AS requests to be notified when the 3GPP network detects that the UE's PDN connection is set up or torn down
- DOWNLINK\_DATA\_DELIVERY\_STATUS: The AF requests to be notified when the 3GPP network detects that the downlink data delivery status is changed.
- API\_SUPPORT\_CAPABILITY: The SCS/AS requests to be notified of the availability of support of service APIs.
- NUM\_OF\_REGD\_UES: The AF requests to be notified of the current number of registered UEs for a network slice.
- NUM\_OF\_ESTD\_PDU\_SESSIONS: The AF requests to be notified of the current number of established PDU Sessions for a network slice.
- AREA\_OF\_INTEREST: The SCS/AS requests to be notified when the UE(i.e. UAV) moves in or out of the geographic area.
- GROUP\_MEMBER\_LIST\_CHANGE: The AF requests to be notified of the changes to a group members list.
- APPLICATION\_START: The AF requests to be notified about the start of application traffic has been detected.
- APPLICATION\_STOP: The AF requests to be notified about the stop of application traffic has been detected.
- SESSION\_INACTIVITY\_TIME: The AF requests to be notified of session inactivity time of the measured UE PDU Session.
- TRAFFIC\_VOLUME: The AF requests to be notified of traffic volume of the measured UE.
- UL\_DL\_DATA\_RATE: The AF requests to be notified of uplink and downlink data rate of the measured UE.

#### ReachabilityType:

anyOf:

- type: string

enum:

- SMS
- DATA

- type: string

description: >

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

description: |

Represents a reachability type.

Possible values are

- SMS: The SCS/AS requests to be notified when the UE becomes reachable for sending SMS to the UE
- DATA: The SCS/AS requests to be notified when the UE becomes reachable for sending downlink data to the UE.

#### LocationType:

anyOf:

- type: string

enum:

- CURRENT\_LOCATION
- LAST\_KNOWN\_LOCATION
- CURRENT\_OR\_LAST\_KNOWN\_LOCATION
- INITIAL\_LOCATION

- type: string

description: >

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

description: |

Represents a location type.

Possible values are

- CURRENT\_LOCATION: The SCS/AS requests to be notified for current location
- LAST\_KNOWN\_LOCATION: The SCS/AS requests to be notified for last known location
- CURRENT\_OR\_LAST\_KNOWN\_LOCATION: The AF requests the current or last known location
- INITIAL\_LOCATION: The AF requests the initial location

#### AssociationType:

anyOf:

- type: string

enum:

- IMEI
- IMEISV

- type: string

description: >

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

description: |

Represents an IMEI or IMEISV to IMSI association.

Possible values are

- IMEI: The value shall be used when the change of IMSI-IMEI association shall be detected
- IMEISV: The value shall be used when the change of IMSI-IMEISV association shall be detected

Accuracy:

anyOf:

- type: string

enum:

- CGI\_ECGI
- ENODEB
- TA\_RA
- PLMN
- TWAN\_ID
- GEO\_AREA
- CIVIC\_ADDR

- type: string

description: >

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

description: |

Represents a desired granularity of accuracy of the requested location information.

Possible values are

- CGI\_ECGI: The SCS/AS requests to be notified using cell level location accuracy.
- ENODEB: The SCS/AS requests to be notified using eNodeB level location accuracy.
- TA\_RA: The SCS/AS requests to be notified using TA/RA level location accuracy.
- PLMN: The SCS/AS requests to be notified using PLMN level location accuracy.
- TWAN\_ID: The SCS/AS requests to be notified using TWAN identifier level location accuracy.
- GEO\_AREA: The SCS/AS requests to be notified using the geographical area accuracy.
- CIVIC\_ADDR: The SCS/AS requests to be notified using the civic address accuracy.

PdnConnectionStatus:

anyOf:

- type: string

enum:

- CREATED
- RELEASED

- type: string

description: >

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

description: |

Represents the PDN connection status.

Possible values are

- CREATED: The PDN connection is created.
- RELEASED: The PDN connection is released.

PdnType:

anyOf:

- type: string

enum:

- IPV4
- IPV6
- IPV4V6
- NON\_IP
- ETHERNET

- type: string

description: >

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

description: |

Represents the PDN connection type.

Possible values are

- IPV4: PDN connection of IPv4 type.
- IPV6: PDN connection of IPv6 type.
- IPV4V6: PDN connection of IPv4v6 type.
- NON\_IP: PDN connection of non-IP type.
- ETHERNET: PDN connection of Ethernet type.

InterfaceIndication:

```

anyOf:
- type: string
  enum:
    - EXPOSURE_FUNCTION
    - PDN_GATEWAY
- type: string
  description: >
    This string provides forward-compatibility with future
    extensions to the enumeration but is not used to encode
    content defined in the present version of this API.
  description: |
    Represents the network entity used for data delivery towards the SCS/AS.
    Possible values are
    - EXPOSURE_FUNCTION: SCEF is used for the PDN connection towards the SCS/AS.
    - PDN_GATEWAY: PDN gateway is used for the PDN connection towards the SCS/AS.

LocationFailureCause:
anyOf:
- type: string
  enum:
    - POSITIONING_DENIED
    - UNSUPPORTED_BY_UE
    - NOT_REGISTERED_UE
    - UNSPECIFIED
    - REQUESTED_AREA_NOT_ALLOWED
- type: string
  description: >
    This string provides forward-compatibility with future extensions to the enumeration but
    is not used to encode content defined in the present version of this API.
  description: >
    Represents the cause of location positioning failure.
    Possible values are:
    - POSITIONING_DENIED: Positioning is denied.
    - UNSUPPORTED_BY_UE: Positioning is not supported by UE.
    - NOT_REGISTERED_UE: UE is not registered.
    - UNSPECIFIED: Unspecified.
    - REQUESTED_AREA_NOT_ALLOWED: The location request is rejected because the location area
    requested by the AF for area event reporting is not allowed.

SubType:
anyOf:
- type: string
  enum:
    - AERIAL_UE
- type: string
  description: >
    This string provides forward-compatibility with future
    extensions to the enumeration but is not used to encode
    content defined in the present version of this API.
  description: |
    Represents a subscription type.
    Possible values are
    - AERIAL_UE: The UE has Aerial subscription.

SACRepFormat:
anyOf:
- type: string
  enum:
    - NUMERICAL
    - PERCENTAGE
- type: string
  description: >
    This string provides forward-compatibility with future extensions to the enumeration but
    is not used to encode content defined in the present version of this API.
  description: Indicates the NSAC reporting format.

```

---

## A.4 ResourceManagementOfBdt API

```

openapi: 3.0.0
info:
  title: 3gpp-bdt
  version: 1.3.0
  description: |
    API for BDT resource management.
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).

```

```
All rights reserved.
externalDocs:
  description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'
security:
  - {}
  - OAuth2ClientCredentials: []
servers:
  - url: '{apiRoot}/3gpp-bdt/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /{scsAsId}/subscriptions:
    parameters:
      - name: scsAsId
        description: String identifying the SCS/AS.
        in: path
        required: true
        schema:
          type: string
    get:
      summary: Fetch all active background data transfer subscription resources for a given SCS/AS.
      operationId: FetchAllActiveBDTSubscriptions
      tags:
        - BDT Subscription
      responses:
        '200':
          description: all BDT policy subscriptions.
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/Bdt'
                minItems: 0
              description: individual BDT policy subscription.
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'
    post:
      summary: Creates a new background data transfer subscription resource.
      operationId: CreateBDTSubscription
      tags:
        - BDT Subscription
      requestBody:
        description: Contains the data to create a BDT subscription.
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/Bdt'
      callbacks:
        bdtWarningNotification:
          '{$request.body#/notificationDestination}':
            post:
              requestBody: # contents of the callback message
                required: true
```

```

    content:
      application/json:
        schema:
          $ref: '#/components/schemas/ExNotification'
  responses:
    '204':
      description: No Content (successful notification)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
responses:
  '201':
    description: Background data transfer policies offered to the SCS/AS.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/Bdt'
    headers:
      Location:
        description: 'Contains the URI of the newly created resource'
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '409':
    $ref: 'TS29122_CommonData.yaml#/components/responses/409'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
/{scsAsId}/subscriptions/{subscriptionId}:
  parameters:
    - name: scsAsId
      description: String identifying the SCS/AS.
      in: path
      required: true
      schema:
        type: string

```

```

- name: subscriptionId
  description: String identifying the individual BDT policy resource in the SCEF.
  in: path
  required: true
  schema:
    type: string
get:
  summary: Read a background data transfer subscription resource.
  operationId: FetchIndBDTSubscription
  tags:
    - Individual BDT Subscription
  responses:
    '200':
      description: Background data transfer policies offered to and selected by the SCEF.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/Bdt'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
put:
  summary: Update a background data transfer subscription resource for negotiation of background
data transfer policy.
  operationId: UpdateBDTSubscription
  tags:
    - Individual BDT Subscription
  requestBody:
    description: Parameters to update/replace the existing BDT subscription
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/Bdt'
  responses:
    '200':
      description: OK (Successful update of the BDT subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/Bdt'
    '204':
      description: No Content. The Individual BDT Subscription resource was updated
successfully.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':

```



```

    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  patch:
    summary: Modify a background data transfer subscription resource to select one of the transfer
policies offered by the SCEF.
    operationId: ModifyBDTSubscription
    tags:
      - Individual BDT Subscription
    requestBody:
      description: Contains information to be performed on the Bdt data structure to select a
transfer policy.
      required: true
      content:
        application/merge-patch+json:
          schema:
            $ref: '#/components/schemas/BdtPatch'
    responses:
      '200':
        description: The Individual BDT Policy resource is modified with a selected policy and a
representation of that resource is returned.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/Bdt'
      '204':
        description: The Individual BDT Policy resource is modified with a selected policy.
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29122_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  delete:
    summary: Delete a background data transfer resource.
    operationId: DeleteBDTSubscription
    tags:
      - Individual BDT Subscription
    responses:
      '204':
        description: The Individual BDT Policy resource is deleted.
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
schemas:
  Bdt:
    description: Represents a Background Data Transfer subscription.
    type: object
    properties:
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      aspId:
        type: string
        description: Identifies an application service provider.
      volumePerUE:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/UsageThreshold'
      numberOfUEs:
        type: integer
        minimum: 1
        description: Identifies the number of UEs.
      desiredTimeWindow:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
      locationArea:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea'
      locationArea5G:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea5G'
      referenceId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/BdtReferenceId'
      transferPolicies:
        type: array
        items:
          $ref: '#/components/schemas/TransferPolicy'
        minItems: 1
        description: Identifies an offered transfer policy.
        readOnly: true
      selectedPolicy:
        type: integer
        description: Identity of the selected background data transfer policy. Shall not be
present in initial message exchange, can be provided by NF service consumer in a subsequent message
exchange.
      externalGroupId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
      notificationDestination:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      warnNotifEnabled:
        type: boolean
        description: >
          Indicates whether the BDT warning notification is enabled (true) or not (false). Default
          value is false.
      trafficDes:
        $ref: '#/components/schemas/TrafficDescriptor'
    required:
      - volumePerUE
      - numberOfUEs
      - desiredTimeWindow
  BdtPatch:
    description: Represents a Background Data Transfer subscription modification request.
    type: object
    properties:
      selectedPolicy:
        type: integer

```

```

    description: Identity of the selected background data transfer policy.
  warnNotifEnabled:
    type: boolean
    description: >
      Indicates whether the BDT warning notification is enabled (true) or not (false).
  notificationDestination:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
  required:
    - selectedPolicy
  TransferPolicy:
    description: Represents an offered transfer policy sent from the SCEF to the SCS/AS, or a
    selected transfer policy sent from the SCS/AS to the SCEF.
    type: object
    properties:
      bdtPolicyId:
        type: integer
        description: Identifier for the transfer policy
      maxUplinkBandwidth:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Bandwidth'
      maxDownlinkBandwidth:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Bandwidth'
      ratingGroup:
        type: integer
        minimum: 0
        description: Indicates the rating group during the time window.
      timeWindow:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
    required:
      - bdtPolicyId
      - ratingGroup
      - timeWindow
  ExNotification:
    description: Represents a Background Data Transfer notification.
    type: object
    properties:
      bdtRefId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/BdtReferenceId'
      locationArea5G:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea5G'
      timeWindow:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
      candPolicies:
        type: array
        items:
          $ref: '#/components/schemas/TransferPolicy'
        minItems: 1
        description: This IE indicates a list of the candidate transfer policies from which the AF
may select a new transfer policy due to network performance degradation.
    required:
      - bdtRefId
  TrafficDescriptor:
    type: string
    description: Identify a traffic descriptor as defined in Figure 5.2.2 of 3GPP TS 24.526,
octets v+5 to w.

```

---

## A.5 ChargeableParty API

```

openapi: 3.0.0
info:
  title: 3gpp-chargeable-party
  version: 1.3.0
  description: |
    API for Chargeable Party management.
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'
security:
  - {}
  - oAuth2ClientCredentials: []
servers:
  - url: '{apiRoot}/3gpp-chargeable-party/v1'
    variables:
      apiRoot:

```

```

    default: https://example.com
    description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /{scsAsId}/transactions:
    get:
      summary: Read all or queried chargeable party transaction resources for a given SCS/AS.
      operationId: FetchAllChargeablePartyTransactions
      tags:
        - Chargeable Party Transaction Operation
      parameters:
        - name: scsAsId
          in: path
          description: Identifier of SCS/AS
          required: true
          schema:
            type: string
        - name: ip-addr
          in: query
          description: The IP address(es) of the requested UE(s).
          required: false
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
                minItems: 1
        - name: ip-domain
          in: query
          description: The IPv4 address domain identifier. The attribute may only be provided if
          IPv4 address is included in the ip-addr query parameter.
          required: false
          schema:
            type: string
        - name: mac-addr
          in: query
          description: The MAC address(es) of the requested UE(s).
          required: false
          schema:
            type: array
            items:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
            minItems: 1
      responses:
        '200':
          description: OK (successful query of Chargeable Party resource)
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/ChargeableParty'
                minItems: 0
          description: individual BDT policy subscription.
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'
    post:

```

```

summary: Create a new chargeable party transaction resource.
operationId: CreateChargeablePartyTransaction
tags:
  - Chargeable Party Transaction Operation
parameters:
  - name: scsAsId
    in: path
    description: Identifier of SCS/AS
    required: true
    schema:
      type: string
requestBody:
  description: representation of the Chargeable Party resource to be Created in the SCEF
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/ChargeableParty'
callbacks:
  eventNotification:
    '{$request.body#/notificationDestination}':
      post:
        requestBody: # contents of the callback message
          required: true
          content:
            application/json:
              schema:
                $ref: 'TS29122_CommonData.yaml#/components/schemas/NotificationData'
responses:
  '204':
    description: No Content (The successful acknowledgement of the notification)
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
responses:
  '201':
    description: successful creation of a chargeable party resource
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/ChargeableParty'
    headers:
      Location:
        description: 'Contains the URI of the newly created resource'
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'

```

```

'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{scsAsId}/transactions/{transactionId}:
get:
  summary: Read a chargeable party resource for a given SCS/AS and a transaction Id.
  operationId: FetchIndChargeablePartyTransaction
  tags:
    - Individual chargeable party resource Operation
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of SCS/AS
      required: true
      schema:
        type: string
    - name: transactionId
      in: path
      description: Identifier of transaction
      required: true
      schema:
        type: string
  responses:
    '200':
      description: OK (successful query of a chargeable party resource)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/ChargeableParty'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

patch:
  summary: Updates a existing chargeable party resource for a given SCS/AS and transaction Id.
  operationId: UpdateChargeablePartyTransaction
  tags:
    - Individual chargeable party resource Operation
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of SCS/AS
      required: true
      schema:
        type: string
    - name: transactionId
      in: path

```

```

    description: Identifier of transaction
    required: true
    schema:
      type: string
  requestBody:
    description: representation of the chargeable party resource to be updated in the SCEF
    required: true
    content:
      application/merge-patch+json:
        schema:
          $ref: '#/components/schemas/ChargeablePartyPatch'
  responses:
    '200':
      description: successful update of a chargeable party resource
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/ChargeableParty'
    '204':
      description: No Content
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes a chargeable party resource for a given SCS/AS and a transaction Id.
  operationId: DeleteChargeablePartyTransaction
  tags:
    - Individual chargeable party resource Operation
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of SCS/AS
      required: true
      schema:
        type: string
    - name: transactionId
      in: path
      description: Identifier of transaction
      required: true
      schema:
        type: string
  responses:
    '204':
      description: successful deletion of an resource of chargeable party
    '200':
      description: OK (Successful deletion of the existing subscription)
      content:
        application/json:
          schema:
            $ref: 'TS29122_CommonData.yaml#/components/schemas/NotificationData'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'

```

```

'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    ChargeableParty:
      description: Represents the configuration of a chargeable party.
      type: object
      properties:
        self:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        dnn:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
        snssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        notificationDestination:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
        requestTestNotification:
          type: boolean
          description: Set to true by the SCS/AS to request the SCEF to send a test notification as
defined in clause 5.2.5.3. Set to false or omitted otherwise.
        websocketNotifConfig:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
        exterAppId:
          type: string
          description: Identifies the external Application Identifier.
        ipv4Addr:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv4Addr'
        ipDomain:
          type: string
        ipv6Addr:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv6Addr'
        macAddr:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
        flowInfo:
          type: array
          items:
            $ref: 'TS29122_CommonData.yaml#/components/schemas/FlowInfo'
          minItems: 1
          description: Describes the application flows.
        ethFlowInfo:
          type: array
          items:
            $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/EthFlowDescription'
          minItems: 1
          description: Identifies Ethernet packet flows.
        sponsorInformation:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/SponsorInformation'
        sponsoringEnabled:
          type: boolean
          description: >
            Indicates whether the sponsoring data connectivity is enabled (true) or not (false).
        referenceId:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/BdtReferenceId'
        servAuthInfo:
          $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/ServAuthInfo'

```



```

usageThreshold:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/UsageThreshold'
events:
  type: array
  items:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Event'
  minItems: 1
  description: Represents the list of event(s) to which the SCS/AS requests to subscribe to.
required:
  - notificationDestination
  - sponsorInformation
  - sponsoringEnabled
ChargeablePartyPatch:
  description: Represents a modification request of a chargeable party resource.
  type: object
  properties:
    flowInfo:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/FlowInfo'
      minItems: 1
      description: Describes the IP flows.
    exterAppId:
      type: string
      description: Identifies the external Application Identifier.
    ethFlowInfo:
      type: array
      items:
        $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/EthFlowDescription'
      minItems: 1
      description: Identifies Ethernet packet flows.
    sponsoringEnabled:
      type: boolean
      description: >
        Indicates whether the sponsoring data connectivity is enabled (true) or not (false).
  referenceId:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/BdtReferenceId'
  usageThreshold:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/UsageThresholdRm'
  notificationDestination:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
  events:
    description: Represents the list of event(s) to which the SCS/AS requests to subscribe to.
    type: array
    items:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Event'
    minItems: 1

```

---

## A.6 NIDD API

openapi: 3.0.0

info:

```

title: 3gpp-nidd
version: 1.3.0
description: |
  API for non IP data delivery.
  © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
  All rights reserved.

```

externalDocs:

```

description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'

```

security:

```

- {}
- oAuth2ClientCredentials: []

```

servers:

```

- url: '{apiRoot}/3gpp-nidd/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.

```

```
paths:
  /{scsAsId}/configurations:
    parameters:
      - name: scsAsId
        description: String identifying the SCS/AS.
        in: path
        required: true
        schema:
          type: string
    get:
      summary: Read all NIDD configuration resources for a given SCS/AS.
      operationId: FetchAllNIDDConfigurations
      tags:
        - NIDD configurations
      responses:
        '200':
          description: all NIDD configurations.
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/NiddConfiguration'
                minItems: 0
              description: individual NIDD configuration.
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'
    post:
      summary: Create a new NIDD configuration resource.
      operationId: CreateNIDDConfiguration
      tags:
        - NIDD configurations
      requestBody:
        description: Contains the data to create a NIDD configuration.
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NiddConfiguration'
      responses:
        '201':
          description: NIDD configuration is successfully created.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/NiddConfiguration'
          headers:
            Location:
              description: 'Contains the URI of the newly created resource'
              required: true
              schema:
                type: string
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
```

```

'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
callbacks:
  niddNotifications:
    '{$request.body#/notificationDestination}':
      post:
        requestBody:
          description: >
            Notification for NIDD configuration status, MO NIDD, MT NIDD delivery report.
          required: true
          content:
            application/json:
              schema:
                oneOf:
                  - $ref: '#/components/schemas/NiddConfigurationStatusNotification'
                  - $ref: '#/components/schemas/NiddUplinkDataNotification'
                  - $ref: '#/components/schemas/NiddDownlinkDataDeliveryStatusNotification'
                  - $ref: '#/components/schemas/GmdNiddDownlinkDataDeliveryNotification'
                  - $ref: '#/components/schemas/ManagePortNotification'
        responses:
          '204':
            description: Expected response to a successful callback processing without a body
          '200':
            description: Expected response to a successful callback processing with a body
            content:
              application/json:
                schema:
                  $ref: 'TS29122_CommonData.yaml#/components/schemas/Acknowledgement'
          '307':
            $ref: 'TS29122_CommonData.yaml#/components/responses/307'
          '308':
            $ref: 'TS29122_CommonData.yaml#/components/responses/308'
          '400':
            $ref: 'TS29122_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29122_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29122_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29122_CommonData.yaml#/components/responses/404'
          '411':
            $ref: 'TS29122_CommonData.yaml#/components/responses/411'
          '413':
            $ref: 'TS29122_CommonData.yaml#/components/responses/413'
          '415':
            $ref: 'TS29122_CommonData.yaml#/components/responses/415'
          '429':
            $ref: 'TS29122_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29122_CommonData.yaml#/components/responses/500'
          '503':
            $ref: 'TS29122_CommonData.yaml#/components/responses/503'
          default:
            $ref: 'TS29122_CommonData.yaml#/components/responses/default'
/{scsAsId}/configurations/{configurationId}:
  parameters:
    - name: scsAsId
      description: String identifying the SCS/AS.
      in: path
      required: true
      schema:
        type: string
    - name: configurationId
      description: String identifying the individual NIDD configuration resource in the SCEF.

```

```

    in: path
    required: true
    schema:
      type: string
  get:
    summary: Read an NIDD configuration resource.
    operationId: FetchIndNIDDConfiguration
    tags:
      - Individual NIDD configuration
    responses:
      '200':
        description: The individual NIDD configuration is successfully retrieved.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NiddConfiguration'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29122_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  patch:
    summary: Modify an existing NIDD configuration resource.
    operationId: ModifyNIDDConfiguration
    tags:
      - Individual NIDD configuration
    requestBody:
      description: Contains information to be applied to the individual NIDD configuration.
      required: true
      content:
        application/merge-patch+json:
          schema:
            $ref: '#/components/schemas/NiddConfigurationPatch'
    responses:
      '200':
        description: >
          The Individual NIDD configuration is modified successfully and a representation
          of that resource is returned.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NiddConfiguration'
      '204':
        description: >
          The Individual NIDD configuration is modified successfully and no content
          is to be sent in the response message body.
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
delete:
  summary: Delete an existing NIDD configuration resource.
  operationId: DeleteNIDDConfiguration
  tags:
    - Individual NIDD configuration
  responses:
    '204':
      description: The Individual NIDD configuration is deleted.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
/{scsAsId}/configurations/{configurationId}/downlink-data-deliveries:
  parameters:
    - name: scsAsId
      description: String identifying the SCS/AS.
      in: path
      required: true
      schema:
        type: string
    - name: configurationId
      description: String identifying the individual NIDD configuration resource in the SCEF.
      in: path
      required: true
      schema:
        type: string
  get:
    summary: Read all pending NIDD downlink data delivery resources related to a particular NIDD
    configuration resource.
    operationId: FetchAllDownlinkDataDeliveries
    tags:
      - NIDD downlink data deliveries
    responses:
      '200':
        description: all NIDD downlink data deliveries.
        content:
          application/json:
            schema:
              type: array
              items:
                $ref: '#/components/schemas/NiddDownlinkDataTransfer'
                minItems: 0
                description: individual NIDD downlink data delivery.
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
post:
  summary: Create an NIDD downlink data delivery resource related to a particular NIDD
configuration resource.
  operationId: CreateDownlinkDataDelivery
  tags:
  - NIDD downlink data deliveries
  requestBody:
  description: Contains the data to create a NIDD downlink data delivery.
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/NiddDownlinkDataTransfer'
  responses:
  '200':
    description: NIDD downlink data delivery is successful.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NiddDownlinkDataTransfer'
  '201':
    description: NIDD downlink data delivery is pending.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NiddDownlinkDataTransfer'
  headers:
    Location:
      description: 'Contains the URI of the newly created resource'
      required: true
      schema:
        type: string
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    description: The NIDD downlink data delivery request was not successful.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NiddDownlinkDataDeliveryFailure'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
/{scsAsId}/configurations/{configurationId}/downlink-data-deliveries/{downlinkDataDeliveryId}:

```

```

parameters:
- name: scsAsId
  description: String identifying the SCS/AS.
  in: path
  required: true
  schema:
    type: string
- name: configurationId
  description: String identifying the individual NIDD configuration resource in the SCEF.
  in: path
  required: true
  schema:
    type: string
- name: downlinkDataDeliveryId
  description: String identifying the individual NIDD downlink data delivery in the SCEF.
  in: path
  required: true
  schema:
    type: string
get:
  summary: Read pending NIDD downlink data delivery resource.
  operationId: FetchIndDownlinkDataDelivery
  tags:
  - Individual NIDD downlink data delivery
  responses:
    '200':
      description: The individual NIDD downlink data delivery is successfully retrieved.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NiddDownlinkDataTransfer'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
put:
  summary: Replace an NIDD downlink data delivery resource.
  operationId: UpdateIndDownlinkDataDelivery
  tags:
  - Individual NIDD downlink data delivery
  requestBody:
    description: >
      Contains information to be applied to the individual NIDD downlink data delivery.
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NiddDownlinkDataTransfer'
  responses:
    '200':
      description: >
        The pending NIDD downlink data is replaced successfully but delivery is pending.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NiddDownlinkDataTransfer'
    '204':
      description: >
        The NIDD downlink data delivery has been replaced successfully and no content
        is to be sent in the response message body.

```

```

'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'409':
  $ref: 'TS29122_CommonData.yaml#/components/responses/409'
'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  description: The NIDD downlink data replacement request was not successful.
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/NiddDownlinkDataDeliveryFailure'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
patch:
  summary: Modify an existing Individual NIDD downlink data delivery resource.
  operationId: ModifyIndDownlinkDataDelivery
  tags:
    - Individual NIDD downlink data delivery
  requestBody:
    description: >
      Contains the parameters to update an individual NIDD downlink data delivery resource.
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NiddDownlinkDataTransferPatch'
responses:
  '200':
    description: >
      OK. The modification of the Individual NIDD downlink data delivery resource was
      successful and an updated representation of the resource within the
      NiddDownlinkDataTransfer data structure in the response message body is returned
      by the SCEF.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NiddDownlinkDataTransfer'
  '204':
    description: >
      No Content. The modification of the Individual NIDD downlink data delivery resource
      was successful and no content is to be sent in the response message body.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '409':
    $ref: 'TS29122_CommonData.yaml#/components/responses/409'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'

```



```

'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  description: >
    Internal Server Error. The NIDD downlink data modification request was not successful.
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/NiddDownlinkDataDeliveryFailure'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
delete:
  summary: Delete an NIDD downlink data delivery resource.
  operationId: DeleteIndDownlinkDataDelivery
  tags:
    - Individual NIDD downlink data delivery
  responses:
    '204':
      description: The pending NIDD downlink data is deleted.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '409':
      $ref: 'TS29122_CommonData.yaml#/components/responses/409'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      description: The NIDD downlink data cancellation request was not successful.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NiddDownlinkDataDeliveryFailure'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
/{scsAsId}/configurations/{configurationId}/rds-ports:
  parameters:
    - name: scsAsId
      description: String identifying the SCS/AS.
      in: path
      required: true
      schema:
        type: string
    - name: configurationId
      description: String identifying the individual NIDD configuration resource in the SCEF.
      in: path
      required: true
      schema:
        type: string
  get:
    summary: Read all RDS ManagePort Configurations.
    operationId: FetchAllManagePortConfigurations
    tags:
      - ManagePort Configurations
    responses:
      '200':
        description: all ManagePort configurations.
        content:
          application/json:
            schema:
              type: array
              items:
                $ref: '#/components/schemas/ManagePort'
            minItems: 0

```

```

        description: individual ManagePort configuration.
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'406':
  $ref: 'TS29122_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
/{scsAsId}/configurations/{configurationId}/rds-ports/{portId}:
  parameters:
    - name: scsAsId
      description: String identifying the SCS/AS.
      in: path
      required: true
      schema:
        type: string
    - name: configurationId
      description: String identifying the individual NIDD configuration resource in the SCEF.
      in: path
      required: true
      schema:
        type: string
    - name: portId
      description: The UE port number.
      in: path
      required: true
      schema:
        type: string
        pattern: '^(ue([0-9]|(1[0-5]))-ef([0-9]|(1[0-5])))$'
  get:
    summary: Read an Individual ManagePort Configuration resource to query port numbers.
    operationId: FetchIndManagePortConfiguration
    tags:
      - Individual ManagePort Configuration
    responses:
      '200':
        description: The individual ManagePort configuration is successfully retrieved.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/ManagePort'
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'406':
  $ref: 'TS29122_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

put:
  summary: Create a new Individual ManagePort Configuration resource to reserve port numbers.
  operationId: UpdateIndManagePortConfiguration
  tags:
    - Individual ManagePort Configuration
  requestBody:
    description: Contains information to be applied to the individual ManagePort configuration.
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/ManagePort'
  responses:
    '201':
      description: The individual ManagePort configuration is created.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/ManagePort'
      headers:
        Location:
          description: 'Contains the URI of the newly created resource'
          required: true
          schema:
            type: string
    '202':
      description: The request is accepted and under processing.
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '409':
      $ref: 'TS29122_CommonData.yaml#/components/responses/409'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      description: The request was not successful.
      content:
        application/problem+json:
          schema:
            $ref: '#/components/schemas/RdsDownlinkDataDeliveryFailure'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
delete:
  summary: Delete an Individual ManagePort Configuration resource to release port numbers.
  operationId: DeleteIndManagePortConfiguration
  tags:
    - Individual ManagePort Configuration
  responses:
    '202':
      description: The request is accepted and under processing.
    '204':
      description: The individual ManagePort configuration is deleted.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '409':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/409'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    description: The request was not successful.
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/RdsDownlinkDataDeliveryFailure'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

## components:

```

securitySchemes:
  oAuth2ClientCredentials:
    type: oauth2
    flows:
      clientCredentials:
        tokenUrl: '{tokenUrl}'
        scopes: {}

```

## schemas:

```

NiddConfiguration:
  description: Represents the configuration for NIDD.
  type: object
  properties:
    self:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    supportedFeatures:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    mtcProviderId:
      type: string
      description: Identifies the MTC Service Provider and/or MTC Application.
    externalId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
    msisdn:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
    externalGroupId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
    duration:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
    reliableDataService:
      type: boolean
      description: >
        Indicates whether the reliable data service (as defined in clause 4.5.14.3 of 3GPP TS
        23.682) acknowledgement is requested (true) or not (false). Default value is false.
    rdsPorts:
      type: array
      items:
        $ref: '#/components/schemas/RdsPort'
      minItems: 1
      description: >
        Indicates the static port configuration that is used for reliable data transfer between
        specific applications using RDS (as defined in clause 5.2.4 and
        5.2.5 of 3GPP TS 24.250).
    pdnEstablishmentOption:
      $ref: '#/components/schemas/PdnEstablishmentOptions'
    notificationDestination:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    requestTestNotification:
      type: boolean
      description: >
        Set to true by the SCS/AS to request the SCEF to send a test notification as defined
        in clause 5.2.5.3. Set to false or omitted otherwise.
    websocketNotifConfig:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
    maximumPacketSize:
      type: integer
      minimum: 1
      description: >
        The Maximum Packet Size is the maximum NIDD packet size that was transferred to
        the UE by the SCEF in the PCO, see clause 4.5.14.1 of 3GPP TS 23.682. If no maximum
        packet size was provided to the UE by the SCEF, the SCEF sends a default configured
        max packet size to SCS/AS. Unit bit.
    readOnly: true
    niddDownlinkDataTransfers:

```

```

    type: array
    items:
      $ref: '#/components/schemas/NiddDownlinkDataTransfer'
    minItems: 1
    description: >
      The downlink data deliveries that needed to be executed by the SCEF. The cardinality of
      the property shall be 0..1 in the request and 0..N in the response (i.e. response may
      contain multiple buffered MT NIDD).
    status:
      $ref: '#/components/schemas/NiddStatus'
    required:
      - notificationDestination
    oneOf:
      - required: [externalId]
      - required: [msisdn]
      - required: [externalGroupId]

NiddDownlinkDataTransfer:
  description: Represents the received NIDD downlink data from the SCS/AS.
  type: object
  properties:
    externalId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
    externalGroupId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
    msisdn:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
    self:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    data:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Bytes'
    reliableDataService:
      type: boolean
      description: >
        Indicates whether the reliable data service (as defined in clause 4.5.14.3 of 3GPP TS
        23.682) acknowledgement is requested (true) or not (false). Default value is false.
    rdsPort:
      $ref: '#/components/schemas/RdsPort'
    maximumLatency:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
    priority:
      type: integer
      description: >
        It is used to indicate the priority of the non-IP data packet relative to other
        non-IP data packets.
    pdnEstablishmentOption:
      $ref: '#/components/schemas/PdnEstablishmentOptions'
    deliveryStatus:
      $ref: '#/components/schemas/DeliveryStatus'
    requestedRetransmissionTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
  required:
    - data
  oneOf:
    - required: [externalId]
    - required: [msisdn]
    - required: [externalGroupId]

NiddUplinkDataNotification:
  description: Represents NIDD uplink data to be notified to the SCS/AS.
  type: object
  properties:
    niddConfiguration:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    externalId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
    msisdn:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
    data:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Bytes'
    reliableDataService:
      type: boolean
      description: >
        Indicates whether the reliable data service acknowledgement is requested (true) or
        not (false).
    rdsPort:
      $ref: '#/components/schemas/RdsPort'
  required:

```

```

    - niddConfiguration
    - data
  oneOf:
    - required: [externalId]
    - required: [msisdn]

NiddDownlinkDataDeliveryStatusNotification:
  description: Represents the delivery status of a specific NIDD downlink data delivery.
  type: object
  properties:
    niddDownlinkDataTransfer:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    deliveryStatus:
      $ref: '#/components/schemas/DeliveryStatus'
    requestedRetransmissionTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
  required:
    - niddDownlinkDataTransfer
    - deliveryStatus

NiddConfigurationStatusNotification:
  description: Represents an NIDD configuration status notification.
  type: object
  properties:
    niddConfiguration:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    externalId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
    msisdn:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
    status:
      $ref: '#/components/schemas/NiddStatus'
    rdsCapIndication:
      type: boolean
      description: >
        It indicates whether the network capability for the reliable data service is enabled
        or not.
    rdsPort:
      $ref: '#/components/schemas/RdsPort'
  required:
    - niddConfiguration
    - status
  oneOf:
    - required: [externalId]
    - required: [msisdn]

GmdNiddDownlinkDataDeliveryNotification:
  description: Represents the delivery status of a specific group NIDD downlink data delivery.
  type: object
  properties:
    niddDownlinkDataTransfer:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    gmdResults:
      type: array
      items:
        $ref: '#/components/schemas/GmdResult'
      minItems: 1
      description: Indicates the group message delivery result.
  required:
    - niddDownlinkDataTransfer
    - gmdResults

RdsPort:
  description: Represents the port configuration for Reliable Data Transfer.
  type: object
  properties:
    portUE:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Port'
    portSCEF:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Port'
  required:
    - portUE
    - portSCEF

GmdResult:
  description: Represents the group message delivery result.
  type: object
  properties:

```

```
externalId:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
msisdn:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
deliveryStatus:
  $ref: '#/components/schemas/DeliveryStatus'
requestedRetransmissionTime:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
required:
- deliveryStatus
oneOf:
- required: [externalId]
- required: [msisdn]

NiddDownlinkDataDeliveryFailure:
description: Represents information related to a failure delivery result.
type: object
properties:
  problemDetail:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
  requestedRetransmissionTime:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
required:
- problemDetail

ManagePort:
description: Represents the configuration of a RDS dynamic port management.
type: object
properties:
  self:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
  appId:
    type: string
    description: Identifies the application.
  manageEntity:
    $ref: '#/components/schemas/ManageEntity'
  skipUeInquiry:
    type: boolean
    description: Indicate whether to skip UE inquiry.
  supportedFormats:
    type: array
    items:
      $ref: '#/components/schemas/SerializationFormat'
    minItems: 1
    description: >
      Indicates the serialization format(s) that are supported by the SCS/AS on the associated
      RDS port.
  configuredFormat:
    $ref: '#/components/schemas/SerializationFormat'
required:
- appId

ManagePortNotification:
description: Represents a ManagePort notification of port numbers that are reserved.
type: object
properties:
  niddConfiguration:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
  externalId:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
  msisdn:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
  managedPorts:
    type: array
    items:
      $ref: '#/components/schemas/ManagePort'
    minItems: 1
    description: Indicates the reserved RDS port configuration information.
required:
- niddConfiguration
oneOf:
- required: [externalId]
- required: [msisdn]

RdsDownlinkDataDeliveryFailure:
description: Represents the failure delivery result for RDS.
allOf:
- $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
```

```

- type: object
  properties:
    requestedRetransmissionTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
    supportedUeFormats:
      type: array
      items:
        $ref: '#/components/schemas/SerializationFormat'
      minItems: 1
      description: >
        Indicates the serialization format(s) that are supported by the UE on the associated
        RDS port.

NiddDownlinkDataTransferPatch:
  description: >
    Represents the parameters to request the modification of an Individual NIDD Downlink Data
    Delivery resource.
  type: object
  properties:
    data:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Bytes'
    reliableDataService:
      type: boolean
      description: >
        Indicates whether the reliable data service (as defined in clause 4.5.14.3 of 3GPP TS
        23.682) acknowledgement is requested (true) or not (false).
    rdsPort:
      $ref: '#/components/schemas/RdsPort'
    maximumLatency:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
    priority:
      type: integer
      description: >
        It is used to indicate the priority of the non-IP data packet relative to other
        non-IP data packets.
    pdnEstablishmentOption:
      $ref: '#/components/schemas/PdnEstablishmentOptions'

PdnEstablishmentOptions:
  anyOf:
  - type: string
    enum:
      - WAIT_FOR_UE
      - INDICATE_ERROR
      - SEND_TRIGGER
  - type: string
    description: >
      This string provides forward-compatibility with future
      extensions to the enumeration but is not used to encode
      content defined in the present version of this API.
  description: |
    Represents PDN establishment options that describe the network behaviour when
    there is no PDN connection towards the addressed UE.
    Possible values are:
    - WAIT_FOR_UE: wait for the UE to establish the PDN connection
    - INDICATE_ERROR: respond with an error cause
    - SEND_TRIGGER: send a device trigger

PdnEstablishmentOptionsRm:
  description: >
    Represents the same information as the PdnEstablishmentOptions data type with the
    difference that it allows also the null value.
  anyOf:
  - $ref: '#/components/schemas/PdnEstablishmentOptions'
  - $ref: 'TS29571_CommonData.yaml#/components/schemas/NullValue'

DeliveryStatus:
  anyOf:
  - type: string
    enum:
      - SUCCESS
      - SUCCESS_NEXT_HOP_ACKNOWLEDGED
      - SUCCESS_NEXT_HOP_UNACKNOWLEDGED
      - SUCCESS_ACKNOWLEDGED
      - SUCCESS_UNACKNOWLEDGED
      - TRIGGERED
      - BUFFERING
      - BUFFERING_TEMPORARILY_NOT_REACHABLE

```



```

- SENDING
- FAILURE
- FAILURE_RDS_DISABLED
- FAILURE_NEXT_HOP
- FAILURE_TIMEOUT
- FAILURE_TEMPORARILY_NOT_REACHABLE
- type: string
description: >
  This string provides forward-compatibility with future
  extensions to the enumeration but is not used to encode
  content defined in the present version of this API.
description: |
  Represents the status of a downlink NIDD data delivery resource.
  Possible values are:
- SUCCESS: Success but details not provided
- SUCCESS_NEXT_HOP_ACKNOWLEDGED: Successful delivery to the next hop with acknowledgment.
- SUCCESS_NEXT_HOP_UNACKNOWLEDGED: Successful delivery to the next hop without
  acknowledgment
- SUCCESS_ACKNOWLEDGED: Reliable delivery was acknowledged by the UE
- SUCCESS_UNACKNOWLEDGED: Reliable delivery was not acknowledged by the UE
- TRIGGERED: The SCEF triggered the device and is buffering the data.
- BUFFERING: The SCEF is buffering the data due to no PDN connection established.
- BUFFERING_TEMPORARILY_NOT_REACHABLE: The SCEF has been informed that the UE is temporarily
  not reachable but is buffering the data
- SENDING: The SCEF has forwarded the data, but they may be stored elsewhere
- FAILURE: Delivery failure but details not provided
- FAILURE_RDS_DISABLED: RDS was disabled
- FAILURE_NEXT_HOP: Unsuccessful delivery to the next hop.
- FAILURE_TIMEOUT: Unsuccessful delivery due to timeout.
- FAILURE_TEMPORARILY_NOT_REACHABLE: The SCEF has been informed that the UE is temporarily
  not reachable without buffering the data.
readOnly: true

NiddStatus:
anyOf:
- type: string
  enum:
    - ACTIVE
    - TERMINATED_UE_NOT_AUTHORIZED
    - TERMINATED
    - RDS_PORT_UNKNOWN
- type: string
  description: >
    This string provides forward-compatibility with future
    extensions to the enumeration but is not used to encode
    content defined in the present version of this API.
description: |
  Represents the status of a NIDD configuration.
  Possible values are:
- ACTIVE: The NIDD configuration is active.
- TERMINATED_UE_NOT_AUTHORIZED: The NIDD configuration was terminated because the UE's
  authorisation was revoked.
- TERMINATED: The NIDD configuration was terminated.
- RDS_PORT_UNKNOWN: The RDS port is unknown.
readOnly: true

ManageEntity:
anyOf:
- type: string
  enum:
    - UE
    - AS
- type: string
  description: >
    This string provides forward-compatibility with future
    extensions to the enumeration but is not used to encode
    content defined in the present version of this API.
description: |
  Represents the origin that manages the RDS port.
  Possible values are:
- UE: Representing the UE.
- AS: Representing the Application Server.
readOnly: true

SerializationFormat:
anyOf:
- type: string
  enum:

```

```

- CBOR
- JSON
- XML
- type: string
description: >
  This string provides forward-compatibility with future
  extensions to the enumeration but is not used to encode
  content defined in the present version of this API.
description: |
  Represents a serialization format associated with an RDS port which is applicable
  for the Rds_serialization_format feature.
  Possible values are
- CBOR: The CBOR Serialzition format
- JSON: The JSON Serialzition format
- XML: The XML Serialzition format

NiddConfigurationPatch:
description: Represents the parameters to update a NIDD configuration.
type: object
properties:
  duration:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTimeRm'
  reliableDataService:
    type: boolean
    description: >
      Indicates whether the reliable data service (as defined in clause 4.5.14.3 of 3GPP TS
      23.682) acknowledgement is requested (true) or not (false).
    nullable: true
  rdsPorts:
    type: array
    items:
      $ref: '#/components/schemas/RdsPort'
    minItems: 1
    description: >
      Indicates the static port configuration that is used for reliable data transfer between
      specific applications using RDS (as defined in clause 5.2.4 and 5.2.5
      of 3GPP TS 24.250).
  pdnEstablishmentOption:
    $ref: '#/components/schemas/PdnEstablishmentOptionsRm'
  notificationDestination:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'

```

---

## A.7 Device Triggering API

openapi: 3.0.0

```

info:
  title: 3gpp-device-triggering
  version: 1.3.0
  description: |
    API for device trigger.
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'

security:
- {}
- oAuth2ClientCredentials: []

servers:
- url: '{apiRoot}/3gpp-device-triggering/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.

paths:
  /{scsAsId}/transactions:
    get:
      summary: read all active device triggering transactions for a given SCS/AS.
      operationId: FetchAllDeviceTriggeringTransactions
      tags:

```

```

- Device Triggering Transactions
parameters:
- name: scsAsId
  in: path
  description: Identifier of the SCS/AS
  required: true
  schema:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/ScsAsId'
responses:
'200':
  description: >
    OK (Successful get all of the active device triggering transactions for the SCS/AS)
  content:
    application/json:
      schema:
        type: array
        items:
          $ref: '#/components/schemas/DeviceTriggering'
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'406':
  $ref: 'TS29122_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
post:
  summary: Create a long-term transaction for a device triggering.
  operationId: CreateDeviceTriggeringTransaction
  tags:
    - Device Triggering API Transactions
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS
      required: true
      schema:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ScsAsId'
  requestBody:
    description: Parameters to request a device triggering delivery.
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/DeviceTriggering'
  callbacks:
    notificationDestination:
      '{$request.body#/notificationDestination}':
        post:
          requestBody: # contents of the callback message
            required: true
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/DeviceTriggeringDeliveryReportNotification'
  responses:
    '200':
      description: OK (successful notification)
      content:
        application/json:
          schema:
            $ref: 'TS29122_CommonData.yaml#/components/schemas/Acknowledgement'
    '204':
      description: No Content (successful notification)

```

```

    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
responses:
  '201':
    description: Created (Successful creation of subscription)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/DeviceTriggering'
    headers:
      Location:
        description: 'Contains the URI of the newly created resource'
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
/{scsAsId}/transactions/{transactionId}:
  get:
    summary: Read a device triggering transaction resource.
    operationId: FetchIndDeviceTriggeringTransaction
    tags:
      - Individual Device Triggering Transaction
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of the SCS/AS
        required: true
        schema:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ScsAsId'
      - name: transactionId
        in: path
        description: Identifier of the transaction resource
        required: true

```

```

    schema:
      type: string
  responses:
    '200':
      description: OK (Successful get the active subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/DeviceTriggering'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  put:
    summary: Replace an existing device triggering transaction resource and the corresponding
    device trigger request.
    operationId: UpdateIndDeviceTriggeringTransaction
    tags:
      - Individual Device Triggering Transaction
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of the SCS/AS
        required: true
        schema:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ScsAsId'
      - name: transactionId
        in: path
        description: Identifier of the transaction resource
        required: true
        schema:
          type: string
    requestBody:
      description: Parameters to update/replace the existing device triggering
      required: true
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/DeviceTriggering'
  responses:
    '200':
      description: OK (Successful update of the device triggering)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/DeviceTriggering'
    '204':
      description: No Content (Successful update of the device triggering)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'

```

```

'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
patch:
  summary: Modify an existing Individual Device Triggering Transaction resource and the
corresponding device triggering request.
  operationId: ModifyIndDeviceTriggeringTransaction
  tags:
    - Individual Device Triggering Transaction
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS
      required: true
      schema:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ScsAsId'
    - name: transactionId
      in: path
      description: Identifier of the transaction resource
      required: true
      schema:
        type: string
  requestBody:
    description: Parameters to request the modification of the existing Individual Device
Triggering Transaction resource.
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/DeviceTriggeringPatch'
  responses:
    '200':
      description: >
        OK. The Individual Device Triggering Transaction resource was successfully modified
        and a representation of the modified Individual Device Triggering Transaction resource
        within the DeviceTriggering data structure including the "deliveryResult" attribute is
        returned by the SCEF.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/DeviceTriggering'
    '204':
      description: >
        No Content. The Individual Device Triggering Transaction resource was successfully
        modified no content is returned in the response message body.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'

```

```

    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  delete:
    summary: Deletes an already existing device triggering transaction.
    operationId: DeleteIndDeviceTriggeringTransaction
    tags:
      - Individual Device Triggering Transaction
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of the SCS/AS
        required: true
        schema:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ScsAsId'
      - name: transactionId
        in: path
        description: Identifier of the transaction resource
        required: true
        schema:
          type: string
    responses:
      '204':
        description: No Content (Successful deletion of the existing subscription)
      '200':
        description: OK (Successful deletion of the existing subscription)
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/DeviceTriggering'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

schemas:
  DeviceTriggering:
    description: Represents device triggering related information.
    type: object
    properties:
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      externalId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
      msisdn:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      validityPeriod:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
      priority:
        $ref: '#/components/schemas/Priority'

```

```

    applicationPortId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Port'
    appSrcPortId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Port'
    triggerPayload:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Bytes'
    notificationDestination:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    requestTestNotification:
      type: boolean
      description: >
        Set to true by the SCS/AS to request the SCEF to send a test notification as defined in
        clause 5.2.5.3. Set to false or omitted otherwise.
    websocketNotifConfig:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
    deliveryResult:
      $ref: '#/components/schemas/DeliveryResult'
  required:
    - validityPeriod
    - priority
    - applicationPortId
    - triggerPayload
    - notificationDestination
  oneOf:
    - required: [externalId]
    - required: [msisdn]

DeviceTriggeringDeliveryReportNotification:
  description: Represents a device triggering delivery report notification.
  type: object
  properties:
    transaction:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    result:
      $ref: '#/components/schemas/DeliveryResult'
  required:
    - transaction
    - result

DeviceTriggeringPatch:
  description: Represents device triggering related information.
  type: object
  properties:
    validityPeriod:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
    priority:
      $ref: '#/components/schemas/Priority'
    applicationPortId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Port'
    appSrcPortId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Port'
    triggerPayload:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Bytes'
    notificationDestination:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    requestTestNotification:
      type: boolean
      description: >
        Set to true by the SCS/AS to request the SCEF to send a test notification as defined
        in clause 5.2.5.3. Set to false or omitted otherwise.
    websocketNotifConfig:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'

DeliveryResult:
  anyOf:
    - type: string
      enum:
        - SUCCESS
        - UNKNOWN
        - FAILURE
        - TRIGGERED
        - EXPIRED
        - UNCONFIRMED
        - REPLACED
        - TERMINATE
    - type: string
      description: >
        This string provides forward-compatibility with future

```



```

    extensions to the enumeration but is not used to encode
    content defined in the present version of this API.
  description: |
    Represents the result of the delivery of a device triggering request.
    Possible values are:
    - SUCCESS: This value indicates that the device action request was successfully completed.
    - UNKNOWN: This value indicates any unspecified errors.
    - FAILURE: This value indicates that this trigger encountered a delivery error and is deemed
      permanently undeliverable.
    - TRIGGERED: This value indicates that device triggering request is accepted by the SCEF.
    - EXPIRED: This value indicates that the validity period expired before the trigger could
      be delivered.
    - UNCONFIRMED: This value indicates that the delivery of the device action request is not
      confirmed.
    - REPLACED: This value indicates that the device triggering replacement request is accepted
      by the SCEF.
    - TERMINATE: This value indicates that the delivery of the device action request is
      terminated by the SCS/AS.
  readOnly: true

Priority:
  anyOf:
  - type: string
    enum:
      - NO_PRIORITY
      - PRIORITY
  - type: string
    description: >
      This string provides forward-compatibility with future
      extensions to the enumeration but is not used to encode
      content defined in the present version of this API.
  description: |
    Represents the priority indication for a trigger payload.
    Possible values are:
    - NO_PRIORITY: This value indicates that the device trigger has no priority.
    - PRIORITY: This value indicates that the device trigger has priority.

```

---

## A.8 GMDViaMBMS APIs

### A.8.1 GMDviaMBMSbyMB2 API

```

openapi: 3.0.0
info:
  title: GMDviaMBMSbyMB2
  description: |
    API for Group Message Delivery via MBMS by MB2
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
  version: 1.3.0
externalDocs:
  description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'
security:
  - {}
  - oAuth2ClientCredentials: []
servers:
  - url: '{apiRoot}/3gpp-group-message-delivery-mb2/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /{scsAsId}/tmgi-allocation:
    get:
      summary: read all TMGI Allocation resource for a given SCS/AS
      operationId: FetchAllTMGIAllocations
      tags:
        - TMGI Allocation Operation
      parameters:
        - name: scsAsId
          in: path
          description: Identifier of SCS/AS
          required: true
          schema:

```

```

    type: string
  responses:
    '200':
      description: OK (successful query of TMGI Allocation resource)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/TMGIAAllocation'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

post:
  summary: Creates a new TMGI Allocation resource for a given SCS/AS.
  operationId: CreateTMGIAAllocation
  tags:
    - TMGI Allocation Operation
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of SCS/AS
      required: true
      schema:
        type: string
  requestBody:
    description: representation of the TMGI Allocation to be created in the SCEF
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/TMGIAAllocation'
  responses:
    '201':
      description: successful creation of an TMGI Allocation
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/TMGIAAllocation'
      headers:
        Location:
          description: 'Contains the URI of the newly created resource'
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{scsAsId}/tmgi-allocation/{tmgi}:
  get:
    summary: Read a TMGI Allocation resource for a given SCS/AS and a TMGI.
    operationId: FetchIndTMGIAllocation
    tags:
      - Individual TMGI Allocation Operation
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of SCS/AS
        required: true
        schema:
          type: string
      - name: tmgi
        in: path
        description: TMGI
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK (successful query of TMGI Allocation resource)
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/TMGIAllocation'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29122_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

  put:
    summary: Updates an existing TMGI Allocation resource for a given SCS/AS and a TMGI.
    operationId: UpdateIndTMGIAllocation
    tags:
      - Individual TMGI Allocation Operation
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of SCS/AS
        required: true
        schema:
          type: string
      - name: tmgi
        in: path
        description: TMGI
        required: true
        schema:
          type: string
    requestBody:
      description: representation of the TMGI Allocation to be updated in the SCEF
      required: true

```

```

content:
  application/json:
    schema:
      $ref: '#/components/schemas/TMGIAAllocation'
responses:
  '200':
    description: successful creation of an TMGI Allocation
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/TMGIAAllocation'
  '204':
    description: >
      The TMGI expiration time renewal is successful, and no content is to be sent in
      the response message body.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

patch:
  summary: Updates an existing TMGI Allocation resource for a given SCS/AS and a TMGI.
  operationId: ModifyIndTMGIAAllocation
  tags:
    - Individual TMGI Allocation Operation
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of SCS/AS
      required: true
      schema:
        type: string
    - name: tmgi
      in: path
      description: TMGI
      required: true
      schema:
        type: string
  requestBody:
    description: representation of the TMGI Allocation to be updated in the SCEF
    required: true
    content:
      application/merge-patch+json:
        schema:
          $ref: '#/components/schemas/TMGIAAllocationPatch'
  responses:
    '200':
      description: successful creation of an TMGI Allocation
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/TMGIAAllocation'
    '204':
      description: >
        The TMGI expiration time renewal is successful, and no content is to be sent
        in the response message body.

```

```

'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

**delete:**

summary: Deletes an existing TMGI Allocation resource for a given SCS/AS and a TMGI.  
 operationId: DeleteTMGIAllocation

**tags:**

- Individual TMGI Allocation Operation

**parameters:**

- name: scsAsId
  - in: path
  - description: Identifier of SCS/AS
  - required: true
  - schema:
    - type: string
- name: tmgi
  - in: path
  - description: TMGI
  - required: true
  - schema:
    - type: string

**responses:**

```

'204':
  description: No Content, successful deletion of an TMGI Allocation
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

**/{scsAsId}/tmgi-allocation/{tmgi}/delivery-via-mbms:**

**get:**

summary: Read all group message delivery via MBMS resource for a given SCS/AS and a TMGI.  
 operationId: FetchAllGMDViaMBMSByMB2

**tags:**

- Delivery via MBMS Operation

**parameters:**

- name: scsAsId
  - in: path

```

    description: Identifier of SCS/AS
    required: true
    schema:
      type: string
  - name: tmgi
    in: path
    description: TMGI
    required: true
    schema:
      type: string
responses:
  '200':
    description: OK (successful query of Delivery via MBMS resource)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/GMDViaMBMSByMb2'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

post:
  summary: Creates a new delivery via MBMS for a given SCS/AS and a TMGI.
  operationId: CreateGMDViaMBMSByMB2
  tags:
    - Delivery via MBMS Operation
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of SCS/AS
      required: true
      schema:
        type: string
    - name: tmgi
      in: path
      description: TMGI
      required: true
      schema:
        type: string
  requestBody:
    description: representation of the GMD via MBMS by MB2 resource to be Created in the SCEF
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/GMDViaMBMSByMb2'
  callbacks:
    gMDByMb2Notification:
      '{$request.body#/notificationDestination}':
        post:
          requestBody: # contents of the callback message
            required: true
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/GMDByMb2Notification'
          responses:
            '200':
              description: OK (The successful acknowledgement of the notification with a body)

```

```

        content:
          application/json:
            schema:
              $ref: 'TS29122_CommonData.yaml#/components/schemas/Acknowledgement'
      '204':
        description: successful notification
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29122_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  responses:
    '201':
      description: successful creation of an GMD via MBMS by MB2 resource
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/GMDViaMBMSByMb2'
      headers:
        Location:
          description: 'Contains the URI of the newly created resource'
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{scsAsId}/tmgi-allocation/{tmgi}/delivery-via-mbms/{transactionId}:
  get:
    summary: Read all group message delivery via MBMS resource for a given SCS/AS and a TMGI.
    operationId: FetchIndDeliveryViaMBMS
    tags:
      - Individual Delivery via MBMS resource Operation
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of SCS/AS

```

```

    required: true
    schema:
      type: string
  - name: tmgi
    in: path
    description: TMGI
    required: true
    schema:
      type: string
  - name: transactionId
    in: path
    description: Identifier of transaction
    required: true
    schema:
      type: string
responses:
  '200':
    description: OK (successful query of an Delivery via MBMS resource)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/GMDViaMBMSByMb2'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Updates a existing delivery via MBMS for a given SCS/AS, a TMGI and transaction Id.
  operationId: UpdateIndDeliveryViaMBMS
  tags:
    - Individual Delivery via MBMS resource Operation
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of SCS/AS
      required: true
      schema:
        type: string
    - name: tmgi
      in: path
      description: TMGI
      required: true
      schema:
        type: string
    - name: transactionId
      in: path
      description: Identifier of transaction
      required: true
      schema:
        type: string
  requestBody:
    description: representation of the GMD via MBMS by MB2 resource to be updated in the SCEF
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/GMDViaMBMSByMb2'
  responses:
    '200':

```



```

description: successful update of an individual GMD via MBMS by MB2 resource
content:
  application/json:
    schema:
      $ref: '#/components/schemas/GMDViaMBMSByMb2'
'204':
  description: >
    The group message delivery is replaced successfully, and no content is to be sent
    in the response message body.
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

patch:

```

summary: Updates a existing delivery via MBMS for a given SCS/AS, a TMGI and transaction Id.
operationId: ModifyIndDeliveryViaMBMS
tags:
  - Individual Delivery via MBMS resource Operation
parameters:
  - name: scsAsId
    in: path
    description: Identifier of SCS/AS
    required: true
    schema:
      type: string
  - name: tmgi
    in: path
    description: TMGI
    required: true
    schema:
      type: string
  - name: transactionId
    in: path
    description: Identifier of transaction
    required: true
    schema:
      type: string
requestBody:
  description: representation of the GMD via MBMS by MB2 resource to be updated in the SCEF
  required: true
  content:
    application/merge-patch+json:
      schema:
        $ref: '#/components/schemas/GMDViaMBMSByMb2Patch'
responses:
  '200':
    description: successful update of an individual GMD via MBMS by MB2 resource
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/GMDViaMBMSByMb2'
  '204':
    description: >
      The group message delivery is modified successfully, and no content is to be sent
      in the response message body.

```

```

'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

delete:

summary: Deletes a delivery via MBMS resource for a given SCS/AS, a TMGI and a transaction Id.

operationId: DeleteIndDeliveryViaMBMS

tags:

- Individual Delivery via MBMS resource Operation

parameters:

- name: scsAsId
  - in: path
  - description: Identifier of SCS/AS
  - required: true
  - schema:
    - type: string
- name: tmgi
  - in: path
  - description: TMGI
  - required: true
  - schema:
    - type: string
- name: transactionId
  - in: path
  - description: Identifier of transaction
  - required: true
  - schema:
    - type: string

responses:

```

'204':
  description: No Content, successful deletion of an resource of delivery via MBMS
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

components:

securitySchemes:

- oAuth2ClientCredentials:

```

type: oauth2
flows:
  clientCredentials:
    tokenUrl: '{tokenUrl}'
    scopes: {}

schemas:
  TMGIAAllocation:
    description: Represents an individual TMGI Allocation resource.
    type: object
    properties:
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      externalGroupId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
      mbmsLocArea:
        $ref: '#/components/schemas/MbmsLocArea'
      tmgiExpiration:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTimeRo'

  GMDViaMBMSByMb2:
    description: Represents a group message delivery via MBMS by MB2.
    type: object
    properties:
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      notificationDestination:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      requestTestNotification:
        type: boolean
        description: >
          Set to true by the SCS/AS to request the SCEF to send a test notification as
          defined in clause 5.2.5.3. Set to false or omitted otherwise.
      websocketNotifConfig:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
      externalGroupId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
      mbmsLocArea:
        $ref: '#/components/schemas/MbmsLocArea'
      messageDeliveryStartTime:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
      groupMessagePayload:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Bytes'
      scefMessageDeliveryIPv4:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv4AddrRo'
      scefMessageDeliveryIPv6:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv6AddrRo'
      scefMessageDeliveryPort:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/PortRo'
    required:
      - notificationDestination

  GMDByMb2Notification:
    description: Represents a group message delivery notification.
    type: object
    properties:
      transaction:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      deliveryTriggerStatus:
        type: boolean
        description: >
          Indicates whether delivery of group message payload corresponding to the TMGI was
          successful (TRUE) or not (FALSE)
    required:
      - transaction
      - deliveryTriggerStatus

  TMGIAAllocationPatch:
    description: >
      Represents the parameters to request the modification of a TMGI Allocation resource.
    type: object
    properties:
      externalGroupId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
      mbmsLocArea:
        $ref: '#/components/schemas/MbmsLocArea'

```

```

GMDviaMBMSByMb2Patch:
  description: Represents a modification request of a group message delivery via MBMS by MB2.
  type: object
  properties:
    externalGroupId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
    mbmsLocArea:
      $ref: '#/components/schemas/MbmsLocArea'
    messageDeliveryStartTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
    groupMessagePayload:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Bytes'
    notificationDestination:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'

MbmsLocArea:
  description: >
    Represents a user location area within which is sent a group message delivery
    via MBMS request.
  type: object
  properties:
    cellId:
      type: array
      items:
        type: string
      minItems: 1
      description: >
        Indicates a Cell Global Identification of the user which identifies the cell the
        UE is registered.
    enodeBId:
      type: array
      items:
        type: string
      minItems: 1
      description: Indicates an eNodeB in which the UE is currently located.
    geographicArea:
      type: array
      items:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/GeographicArea'
      minItems: 1
      description: Identifies a geographic area of the user where the UE is located.
    mbmsServiceAreaId:
      type: array
      items:
        type: string
      minItems: 1
      description: Identifies an MBMS Service Area Identity of the user where the UE is located.
    civicAddress:
      type: array
      items:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/CivicAddress'
      minItems: 1
      description: Identifies a civic address of the user where the UE is located.

```

## A.8.2 GMDviaMBMSbyxMB API

openapi: 3.0.0

```

info:
  title: GMDviaMBMSbyxMB
  description: |
    API for Group Message Delivery via MBMS by xMB
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
  version: 1.3.0

```

```

externalDocs:
  description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'

```

```

security:
  - {}
  - oAuth2ClientCredentials: []

```

```

servers:
  - url: '{apiRoot}/3gpp-group-message-delivery-xmb/v1'

```

```
variables:
  apiRoot:
    default: https://example.com
    description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.

paths:
  /{scsAsId}/services:
    get:
      summary: Read all service resources for a given SCS/AS.
      operationId: FetchAllxMBServices
      tags:
        - Service Operation
      parameters:
        - name: scsAsId
          in: path
          description: Identifier of SCS/AS
          required: true
          schema:
            type: string
      responses:
        '200':
          description: OK (successful query of service creation resource)
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/ServiceCreation'
                minItems: 0
              description: The service resource for the SCS/AS in the request URI is returned.
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'

    post:
      summary: Creates a new service creation resource for a given SCS/AS.
      operationId: CreatexMBSERVICE
      tags:
        - Service Operation
      parameters:
        - name: scsAsId
          in: path
          description: Identifier of SCS/AS
          required: true
          schema:
            type: string
      requestBody:
        description: representation of the service to be created in the SCEF
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/ServiceCreation'
      responses:
        '201':
          description: successful creation of a service
          content:
            application/json:
              schema:
```

```

    $ref: '#/components/schemas/ServiceCreation'
  headers:
    Location:
      description: 'Contains the URI of the newly created resource'
      required: true
      schema:
        type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{scsAsId}/services/{serviceId}:
  get:
    summary: Read a service resource for a given SCS/AS and a Service Id.
    operationId: FetchIndxMBSservice
    tags:
      - Individual Service Operation
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of SCS/AS
        required: true
        schema:
          type: string
      - name: serviceId
        in: path
        description: Service Id
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK (successful query of service resource)
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/ServiceCreation'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29122_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

delete:
  summary: Deletes an existing service resource for a given SCS/AS and a service id.
  operationId: DeleteMBSservice
  tags:
    - Individual Service Operation
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of SCS/AS
      required: true
      schema:
        type: string
    - name: serviceId
      in: path
      description: Service Id
      required: true
      schema:
        type: string
  responses:
    '204':
      description: No Content, successful deletion of a service resource
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```
/{scsAsId}/services/{serviceId}/delivery-via-mbms:
```

```

get:
  summary: Read all group message delivery via MBMS resource for a given SCS/AS and a service
id.
  operationId: FetchAllGMDViaMBMS
  tags:
    - Delivery via MBMS Operation
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of SCS/AS
      required: true
      schema:
        type: string
    - name: serviceId
      in: path
      description: Service Id
      required: true
      schema:
        type: string
  responses:
    '200':
      description: OK (successful query of Delivery via MBMS resource)
      content:
        application/json:
          schema:
            type: array
            items:
              $ref: '#/components/schemas/GMDViaMBMSByxMB'
            minItems: 0
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

post:

```

summary: Creates a new delivery via MBMS for a given SCS/AS and a service Id.
operationId: CreateGMDViaMBMS
tags:
  - Delivery via MBMS Operation
parameters:
  - name: scsAsId
    in: path
    description: Identifier of SCS/AS
    required: true
    schema:
      type: string
  - name: serviceId
    in: path
    description: Service Id
    required: true
    schema:
      type: string
requestBody:
  description: representation of the GMD via MBMS by xMB resource to be Created in the SCEF
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/GMDViaMBMSByxMB'
callbacks:
  gMDByxMBNotification:
    '{$request.body#/notificationDestination}':
      post:
        requestBody: # contents of the callback message
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/GMDByxMBNotification'
  responses:
    '200':
      description: OK (The successful acknowledgement of the notification with a body)
      content:
        application/json:
          schema:
            $ref: 'TS29122_CommonData.yaml#/components/schemas/Acknowledgement'
    '204':
      description: successful notification
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'

```



```

    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
responses:
  '201':
    description: successful creation of an GMD via MBMS by xMB resource
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/GMDViaMBMSByxMB'
    headers:
      Location:
        description: 'Contains the URI of the newly created resource'
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{scsAsId}/services/{serviceId}/delivery-via-mbms/{transactionId}:
  get:
    summary: Read all group message delivery via MBMS resource for a given SCS/AS and a service
    Id.
    operationId: FetchIndGMDViaMBMS
    tags:
      - Individual Delivery via MBMS resource Operation
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of SCS/AS
        required: true
        schema:
          type: string
      - name: serviceId
        in: path
        description: Service Id
        required: true
        schema:
          type: string
      - name: transactionId
        in: path
        description: Identifier of transaction
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK (successful query of an Delivery via MBMS resource)
        content:
          application/json:
            schema:

```

```

    $ref: '#/components/schemas/GMDViaMBMSByxMB'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

put:

```

  summary: Updates an existing delivery via MBMS for a given SCS/AS, a service Id and
  transaction Id.
  operationId: UpdateIndGMDViaMBMS
  tags:
    - Individual Delivery via MBMS resource Operation
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of SCS/AS
      required: true
      schema:
        type: string
    - name: serviceId
      in: path
      description: Service Id
      required: true
      schema:
        type: string
    - name: transactionId
      in: path
      description: Identifier of transaction
      required: true
      schema:
        type: string
  requestBody:
    description: representation of the GMD via MBMS by xMB resource to be updated in the SCEF
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/GMDViaMBMSByxMB'
  responses:
    '200':
      description: successful update of an individual GMD via MBMS by xMB resource
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/GMDViaMBMSByxMB'
    '204':
      description: >
        The group message delivery was modified successfully, and no content is to be sent
        in the response message body.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

patch:

```

  summary: Updates an existing delivery via MBMS for a given SCS/AS, a service Id and
  transaction Id.
  operationId: ModifyIndGMDViaMBMS
  tags:
  - Individual Delivery via MBMS resource Operation
  parameters:
  - name: scsAsId
    in: path
    description: Identifier of SCS/AS
    required: true
    schema:
      type: string
  - name: serviceId
    in: path
    description: Service Id
    required: true
    schema:
      type: string
  - name: transactionId
    in: path
    description: Identifier of transaction
    required: true
    schema:
      type: string
  requestBody:
    description: representation of the GMD via MBMS by xMB resource to be updated in the SCEF
    required: true
    content:
      application/merge-patch+json:
        schema:
          $ref: '#/components/schemas/GMDViaMBMSByxMBPatch'
  responses:
  '200':
    description: successful update of an individual GMD via MBMS by xMB resource
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/GMDViaMBMSByxMB'
  '204':
    description: >
      The group message delivery was modified successfully, and no content is to be sent
      in the response message body.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes a delivery via MBMS resource for a given SCS/AS, a service Id and a
transaction Id.
  operationId: DeleteIndGMDViaMBMS
  tags:
  - Individual Delivery via MBMS resource Operation
  parameters:
  - name: scsAsId
    in: path
    description: Identifier of SCS/AS
    required: true
    schema:
      type: string
  - name: serviceId
    in: path
    description: Service Id
    required: true
    schema:
      type: string
  - name: transactionId
    in: path
    description: Identifier of transaction
    required: true
    schema:
      type: string
  responses:
  '204':
    description: No Content, successful deletion of an resource of deliery via MBMS
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

schemas:
  ServiceCreation:
    description: Represents an individual xMB Service resource.
    type: object
    properties:
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      externalGroupId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
      userServiceId:

```

```

    type: string
    description: Identifies the MBMS User Service supplied by the SCEF.
    readOnly: true
  serviceClass:
    type: string
    description: The service class that service belongs to supplied by the SCEF.
    readOnly: true
  serviceLanguages:
    type: array
    items:
      type: string
    minItems: 1
    description: List of language of the service content supplied by the SCEF.
    readOnly: true
  serviceNames:
    type: array
    items:
      type: string
    minItems: 1
    description: List of Service Names supplied by the SCEF.
    readOnly: true
  receiveOnlyMode:
    type: boolean
    description: >
      When set to 'true', the Content Provider indicates that the service is a Receive Only
      Mode service. This parameter is supplied by the SCEF.
    readOnly: true
  serviceAnnouncementMode:
    $ref: '#/components/schemas/ServiceAnnouncementMode'

GMDViaMBMSByxMB:
  description: Represents a group message delivery via MBMS by xMB.
  type: object
  properties:
    self:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    notificationDestination:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    requestTestNotification:
      type: boolean
      description: >
        Set to true by the SCS/AS to request the SCEF to send a test notification as defined
        in clause 5.2.5.3. Set to false or omitted otherwise.
    websocketNotifConfig:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
    mbmsLocArea:
      $ref: '#/components/schemas/MbmsLocArea'
    messageDeliveryStartTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
    messageDeliveryStopTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
    groupMessagePayload:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Bytes'
    scefMessageDeliveryIPv4:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv4AddrRo'
    scefMessageDeliveryIPv6:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv6AddrRo'
    scefMessageDeliveryPort:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/PortRo'
  required:
    - notificationDestination

GMDByxMBNotification:
  description: Represents a group message delivery notification.
  type: object
  properties:
    transaction:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    deliveryTriggerStatus:
      type: boolean
      description: >
        Indicates whether delivery of group message payload was successful(TRUE) or not (FALSE).
  required:
    - transaction
    - deliveryTriggerStatus

GMDViaMBMSByxMBPatch:
  description: Represents a modification request of a group message delivery via MBMS by xMB.

```

```

type: object
properties:
  mbmsLocArea:
    $ref: '#/components/schemas/MbmsLocArea'
  messageDeliveryStartTime:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
  messageDeliveryStopTime:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
  groupMessagePayload:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Bytes'
  notificationDestination:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'

MbmsLocArea:
  description: >
    Represents a user location area within which is sent a group message delivery via MBMS
    request.
  type: object
  properties:
    cellId:
      type: array
      items:
        type: string
      minItems: 1
      description: >
        Indicates a Cell Global Identification of the user which identifies the cell the UE is
        registered.
    enodeBId:
      type: array
      items:
        type: string
      minItems: 1
      description: Indicates an eNodeB in which the UE is currently located.
    geographicArea:
      type: array
      items:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/GeographicArea'
      minItems: 1
      description: Identifies a geographic area of the user where the UE is located.
    mbmsServiceAreaId:
      type: array
      items:
        type: string
      minItems: 1
      description: Identifies an MBMS Service Area Identity of the user where the UE is located.
    civicAddress:
      type: array
      items:
        $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/CivicAddress'
      minItems: 1
      description: Identifies a civic address of the user where the UE is located.

ServiceAnnouncementMode:
  anyOf:
    - type: string
      enum:
        - SACH
        - CONTENT_PROVIDER
    - type: string
      description: >
        This string provides forward-compatibility with future
        extensions to the enumeration but is not used to encode
        content defined in the present version of this API.
      description: |
        Represents the service announcement mode.
        Possible values are:
        - SACH: BM-SC performs the service announcement for the current service using the
          SACH channel.
        - CONTENT_PROVIDER: BM-SC provides the necessary service access information used by
          the Content Provider to create the service announcement information.
  readOnly: true

```

---

## A.9 ReportingNetworkStatus API

openapi: 3.0.0

```
info:
  title: 3gpp-network-status-reporting
  version: 1.3.0
  description: |
    API for reporting network status.
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'

security:
- {}
- oAuth2ClientCredentials: []

servers:
- url: '{apiRoot}/3gpp-net-stat-report/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.

paths:
  /{scsAsId}/subscriptions:
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of the SCS/AS
        required: true
        schema:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ScsAsId'
    get:
      summary: Read all network status reporting subscription resources for a given SCS/AS.
      operationId: FetchAllNwStatusReportSubscriptions
      tags:
        - Network Status Reporting Subscriptions
      responses:
        '200':
          description: The requested information was returned successfully.
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/NetworkStatusReportingSubscription'
                minItems: 0
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'
    post:
      summary: Create a new network status reporting subscription resource.
      operationId: CreateNwStatusReportSubscription
      tags:
        - Network Status Reporting Subscriptions
      requestBody:
        required: true
```

```

content:
  application/json:
    schema:
      $ref: '#/components/schemas/NetworkStatusReportingSubscription'
callbacks:
  notificationDestination:
    '{$request.body#/notificationDestination}':
      post:
        requestBody: # contents of the callback message
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/NetworkStatusReportingNotification'
        responses:
          '204':
            description: No Content (successful notification)
          '307':
            $ref: 'TS29122_CommonData.yaml#/components/responses/307'
          '308':
            $ref: 'TS29122_CommonData.yaml#/components/responses/308'
          '400':
            $ref: 'TS29122_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29122_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29122_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29122_CommonData.yaml#/components/responses/404'
          '411':
            $ref: 'TS29122_CommonData.yaml#/components/responses/411'
          '413':
            $ref: 'TS29122_CommonData.yaml#/components/responses/413'
          '415':
            $ref: 'TS29122_CommonData.yaml#/components/responses/415'
          '429':
            $ref: 'TS29122_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29122_CommonData.yaml#/components/responses/500'
          '503':
            $ref: 'TS29122_CommonData.yaml#/components/responses/503'
          default:
            $ref: 'TS29122_CommonData.yaml#/components/responses/default'
responses:
  '201':
    description: >
      The subscription was created successfully. The URI of the created resource shall be
      returned in the "Location" HTTP header.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NetworkStatusReportingSubscription'
    headers:
      Location:
        description: 'Contains the URI of the newly created resource'
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'

```



```

    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  /{scsAsId}/subscriptions/{subscriptionId}:
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of the SCS/AS
        required: true
        schema:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ScsAsId'
      - name: subscriptionId
        in: path
        description: Identifier of the subscription resource of type string
        required: true
        schema:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ResourceId'
    get:
      summary: Read an active network status reporting subscription resource.
      operationId: FetchIndNwStatusReportSubscription
      tags:
        - Individual Network Status Reporting subscription
      responses:
        '200':
          description: The requested information was returned successfully.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/NetworkStatusReportingSubscription'
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'
    put:
      summary: Modify an existing subscription resource to update a subscription.
      operationId: UpdateIndNwStatusReportSubscription
      tags:
        - Individual Network Status Reporting subscription
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NetworkStatusReportingSubscription'
      responses:
        '200':
          description: The subscription was updated successfully.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/NetworkStatusReportingSubscription'
        '204':
          description: No Content. The subscription was updated successfully.
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
patch:
  summary: Modify an existing Individual Network Status Reporting Subscription resource.
  operationId: ModifyIndNwStatusReportSubscription
  tags:
    - Individual Network Status Reporting Subscription
  requestBody:
    description: >
      Contains the parameters to modify an existing Individual Network Status Reporting
      Subscription resource.
    required: true
    content:
      application/merge-patch+json:
        schema:
          $ref: '#/components/schemas/NetStatusRepSubsPatch'
  responses:
    '200':
      description: >
        OK. The modification of the Individual Network Status Reporting Subscription resource
        was successfull. The SCEF shall return an updated representation of the resource within
        the NetworkStatusReportingSubscription data structure in the response message body.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NetworkStatusReportingSubscription'
    '204':
      description: >
        No Content. The modification of the Individual Network Status Reporting Subscription
        resource was successfull and no content is to be sent in the response message body.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
delete:
  summary: Delete an existing continuous network status reporting subscription resource.
  operationId: DeleteIndNwStatusReportSubscription
  tags:
    - Individual Network Status Reporting subscription

```

```

responses:
  '204':
    description: The subscription was updated successfully.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

```

```

schemas:
  NetworkStatusReportingSubscription:
    description: Represents a subscription to network status information reporting.
    type: object
    properties:
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      notificationDestination:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      requestTestNotification:
        type: boolean
        description: >
          Set to true by the SCS/AS to request the SCEF to send a test notification as defined in
          clause 5.2.5.3. Set to false or omitted otherwise.
      websocketNotifConfig:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
      locationArea:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea'
      timeDuration:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
      thresholdValues:
        type: array
        items:
          $ref: '#/components/schemas/CongestionValue'
        minItems: 1
        description: >
          Identifies a list of congestion level(s) with exact value that the SCS/AS requests
          to be informed of when reached.
      thresholdTypes:
        type: array
        items:
          $ref: '#/components/schemas/CongestionType'
        minItems: 1
        description: Identifies a list of congestion level(s) with abstracted value that the
        SCS/AS requests to be informed of when reached.
    required:
      - notificationDestination
      - locationArea
    not:
      required: [thresholdValues, thresholdTypes]

  NetStatusRepSubsPatch:
    description: >

```

```

    Represents the parameters to request the modification of network status reporting
    subscription.
    type: object
    properties:
      notificationDestination:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      locationArea:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea'
      timeDuration:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTimeRm'
      thresholdValues:
        type: array
        items:
          $ref: '#/components/schemas/CongestionValue'
        minItems: 1
      thresholdTypes:
        type: array
        items:
          $ref: '#/components/schemas/CongestionType'
        minItems: 1
    not:
      required: [thresholdValues, thresholdTypes]

NetworkStatusReportingNotification:
  description: Represents a network status reporting notification.
  type: object
  properties:
    subscription:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    nsIValue:
      $ref: '#/components/schemas/CongestionValue'
    nsIType:
      $ref: '#/components/schemas/CongestionType'
  required:
    - subscription
  not:
    required: [nsIValue, nsIType]

CongestionValue:
  type: integer
  minimum: 0
  maximum: 31
  description: >
    Unsigned integer with valid values between 0 and 31. The value 0 indicates that there is no
    congestion. The value 1 is the lowest congestion level and value 31 is the highest
    congestion level.

CongestionType:
  anyOf:
    - type: string
      enum:
        - HIGH
        - MEDIUM
        - LOW
    - type: string
      description: >
        This string provides forward-compatibility with future
        extensions to the enumeration but is not used to encode
        content defined in the present version of this API.
      description: |
        Represents abstracted values for congestion status.
        Possible values are:
        - HIGH: The congestion status is high.
        - MEDIUM: The congestion status is medium.
        - LOW: The congestion status is low.

```

---

## A.10 CpProvisioning API

openapi: 3.0.0

info:

title: 3gpp-cp-parameter-provisioning

version: 1.3.0

description: |

API for provisioning communication pattern parameters.

© 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).

All rights reserved.

```

externalDocs:
  description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'

security:
- {}
- oAuth2ClientCredentials: []

servers:
- url: '{apiRoot}/3gpp-cp-parameter-provisioning/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.

paths:
  /{scsAsId}/subscriptions:
    get:
      parameters:
        - name: scsAsId
          in: path
          description: Identifier of the SCS/AS as defined in clause 5.2.4 of 3GPP TS 29.122.
          required: true
          schema:
            type: string
      summary: Read all active CP parameter provisioning subscription resources for a given SCS/AS.
      operationId: FetchAllCPProvisioningSubscriptions
      tags:
        - CP provisioning Subscriptions
      responses:
        '200':
          description: OK. The subscription information related to the request URI is returned.
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/CpInfo'
                minItems: 0
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'
    post:
      parameters:
        - name: scsAsId
          in: path
          description: Identifier of the SCS/AS as defined in clause 5.2.4 of 3GPP TS 29.122.
          required: true
          schema:
            type: string
      summary: Create a new subscription resource of provisioning CP parameter set(s).
      operationId: CreateCPProvisioningSubscription
      tags:
        - CP provisioning Subscriptions
      requestBody:
        description: >
          Create new subscriptions for a given SCS/AS and the provisioning CP parameter sets.

```

```

    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/CpInfo'
  responses:
    '201':
      description: >
        Created. The subscription was created successfully. The SCEF shall return the created
        subscription in the response content.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/CpInfo'
      headers:
        Location:
          description: 'Contains the URI of the newly created resource'
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      description: >
        The CP parameters for all sets were not created successfully. CpReport may be included
        with detailed information.
      content:
        application/json:
          schema:
            type: array
            items:
              $ref: '#/components/schemas/CpReport'
            minItems: 1
        application/problem+json:
          schema:
            $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
/{scsAsId}/subscriptions/{subscriptionId}:
  get:
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of the SCS/AS as defined in clause 5.2.4 of 3GPP TS 29.122.
        required: true
        schema:
          type: string
      - name: subscriptionId
        in: path
        description: Subscription ID
        required: true
        schema:
          type: string
    summary: Read a CP parameter provisioning subscription resource.
    operationId: FetchIndCPProvisioningSubscription
    tags:
      - Individual CP Provisioning Subscription
  responses:
    '200':
      description: OK. The subscription information related to the request URI is returned.
      content:
        application/json:

```

```

      schema:
        $ref: '#/components/schemas/CpInfo'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  put:
    summary: Modify a CP parameter provisioning subscription resource.
    operationId: UpdateIndCPProvisioningSubscription
    tags:
      - Individual CP Provisioning Subscription
    requestBody:
      description: Modify a CP parameter provisioning subscription resource.
      required: true
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/CpInfo'
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of the SCS/AS as defined in clause 5.2.4 of 3GPP TS 29.122.
        required: true
        schema:
          type: string
      - name: subscriptionId
        in: path
        description: Subscription ID
        required: true
        schema:
          type: string
    responses:
      '200':
        description: >
          OK. The subscription was modified successfully. The SCEF shall return an updated
          subscription in the response content.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/CpInfo'
      '204':
        description: >
          No Content. The subscription was modified successfully and no content is to be sent
          in the response message body.
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'

```

```

'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  description: >
    The CP parameters for all sets were not updated successfully. CpReport may be included
    with detailed information.
  content:
    application/json:
      schema:
        type: array
        items:
          $ref: '#/components/schemas/CpReport'
        minItems: 1
    application/problem+json:
      schema:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
delete:
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS as defined in clause 5.2.4 of 3GPP TS 29.122.
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Subscription ID
      required: true
      schema:
        type: string
  summary: Delete a CP parameter provisioning subscription resource.
  operationId: DeleteIndCPProvisioningSubscription
  tags:
    - Individual CP Provisioning Subscription
  responses:
    '204':
      description: >
        No Content. The subscription was deleted successfully. The content shall be empty.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
/{scsAsId}/subscriptions/{subscriptionId}/cpSets/{setId}:
get:
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS as defined in clause 5.2.4 of 3GPP TS 29.122.
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Subscription ID
      required: true
      schema:

```



```

    type: string
  - name: setId
    in: path
    description: Identifier of the CP parameter set
    required: true
    schema:
      type: string
summary: Read CP at individual CP set(s) level associated with a CP parameter set Id.
operationId: FetchIndCPSetProvisioning
tags:
  - Individual CP set Provisioning
responses:
  '200':
    description: OK. The subscription information related to the request URI is returned.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/CpParameterSet'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
put:
summary: Update CP at individual CP set(s) level associated with a CP parameter set Id.
operationId: UpdateIndCPSetProvisioning
tags:
  - Individual CP set Provisioning
requestBody:
  description: Change information for a CP parameter set.
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/CpParameterSet'
parameters:
  - name: scsAsId
    in: path
    description: Identifier of the SCS/AS as defined in clause 5.2.4 of 3GPP TS 29.122.
    required: true
    schema:
      type: string
  - name: subscriptionId
    in: path
    description: Subscription ID
    required: true
    schema:
      type: string
  - name: setId
    in: path
    description: Identifier of the CP parameter set
    required: true
    schema:
      type: string
responses:
  '200':
    description: >
      OK. The CP parameter set resource was modified successfully. The SCEF shall return an
      updated CP parameter set resource in the response content.
    content:
      application/json:

```

```

    schema:
      $ref: '#/components/schemas/CpParameterSet'
'204':
  description: >
    No Content. The CP parameter set resource was modified successfully and no content
    is to be sent in the response message body.
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'409':
  description: The CP parameters for the CP set were not updated successfully.
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/CpReport'
    application/problem+json:
      schema:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  description: The CP parameters for the CP set were not updated successfully.
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/CpReport'
    application/problem+json:
      schema:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
delete:
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS as defined in clause 5.2.4 of 3GPP TS 29.122.
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Subscription ID
      required: true
      schema:
        type: string
    - name: setId
      in: path
      description: Identifier of the CP parameter set
      required: true
      schema:
        type: string
  summary: Delete CP at individual CP set(s) level associated with a CP parameter set Id.
  operationId: DeleteIndCPSetProvisioning
  tags:
    - Individual CP set Provisioning
  responses:
    '204':
      description: >
        No Content. The subscription was deleted successfully. The content shall be empty.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'

```

```

'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

schemas:
  CpInfo:
    description: Represents the resources for communication pattern parameter provisioning.
    type: object
    properties:
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      mtcProviderId:
        type: string
        description: Identifies the MTC Service Provider and/or MTC Application.
      dnn:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
      externalId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
      msisdn:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
      externalGroupId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
      cpParameterSets:
        type: object
        additionalProperties:
          $ref: '#/components/schemas/CpParameterSet'
        minProperties: 1
        description: >
          Identifies a set of CP parameter information that may be part of this CpInfo structure.
          Any string value can be used as a key of the map.
      cpReports:
        type: object
        additionalProperties:
          $ref: '#/components/schemas/CpReport'
        minProperties: 1
        description: >
          Supplied by the SCEF and contains the CP set identifiers for which CP parameter(s) are
          not added or modified successfully. The failure reason is also included. Each element
          provides the related information for one or more CP set identifier(s) and is identified
          in the map via the failure identifier as key.
        readOnly: true
      snssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      ueIpAddr:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
      ueMacAddr:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
    required:
      - cpParameterSets
    oneOf:
      - required: [externalId]
      - required: [msisdn]

```

```

- required: [externalGroupId]

CpParameterSet:
  description: Represents an offered communication pattern parameter set.
  type: object
  properties:
    setId:
      type: string
      description: >
        SCS/AS-chosen correlator provided by the SCS/AS in the request to create a resource
        for CP parameter set(s).
    self:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    validityTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
    periodicCommunicationIndicator:
      $ref: '#/components/schemas/CommunicationIndicator'
    communicationDurationTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
    periodicTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
    scheduledCommunicationTime:
      $ref: '#/components/schemas/ScheduledCommunicationTime'
    scheduledCommunicationType:
      $ref: '#/components/schemas/ScheduledCommunicationType'
    stationaryIndication:
      $ref: '#/components/schemas/StationaryIndication'
    batteryInds:
      type: array
      items:
        $ref: '#/components/schemas/BatteryIndication'
      minItems: 1
    trafficProfile:
      $ref: '#/components/schemas/TrafficProfile'
    expectedUmts:
      type: array
      items:
        $ref: '#/components/schemas/UmtLocationArea5G'
      minItems: 1
      description: >
        Identifies the UE's expected geographical movement. The attribute is only applicable
        in 5G.
    expectedUmtDays:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DayOfWeek'
    expectedUmtDaysAdd:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DayOfWeek'
      minItems: 1
      maxItems: 5
      description: Identifies the additional day(s) of the week.
    appExpUeBehv:
      $ref: '#/components/schemas/AppExpUeBehaviour'
    confidenceLevel:
      type: string
      pattern: '^[0]\.[0-9]{2}|[1.00]$\''
    accuracyLevel:
      type: string
      pattern: '^[0]\.[0-9]{2}|[1.00]$\''
  required:
    - setId

ScheduledCommunicationTime:
  description: Represents an offered scheduled communication time.
  type: object
  properties:
    daysOfWeek:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DayOfWeek'
      minItems: 1
      maxItems: 6
      description: >
        Identifies the day(s) of the week. If absent, it indicates every day of the week.
    timeOfDayStart:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeOfDay'
    timeOfDayEnd:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeOfDay'

```

```

CpReport:
  description: >
    Represents a CP report indicating the CP set identifier(s) which CP parameter(s) are not
    added or modified successfully and the corresponding failure cause(s).
  type: object
  properties:
    setIds:
      type: array
      items:
        type: string
      minItems: 1
      description: >
        Identifies the CP set identifier(s) which CP parameter(s) are not added or modified
        successfully
    failureCode:
      $ref: '#/components/schemas/CpFailureCode'
  required:
    - failureCode

UmtLocationArea5G:
  description: Represents the user location area describing the UE moving trajectory.
  allOf:
    - $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea5G'
    - type: object
      properties:
        umtTime:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeOfDay'
        umtDuration:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'

AppExpUeBehaviour:
  description: Contains the Application Specific Expected UE Behaviour parameters.
  type: object
  properties:
    appId:
      type: string
      description: Indicates the Application Identifier.
    expPduSesInacTm:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
    flowDescriptions:
      type: array
      items:
        type: string
      minItems: 1
      description: >
        Represents a 3-tuple with protocol, server ip and server port for UL/DL application
        traffic. The content of the string has the same encoding as the IPFilterRule AVP
        value as defined in IETF RFC 6733.
    confidenceLevel:
      type: string
      pattern: '^[0]\.[0-9]{2}|[1.00]$\''
    accuracyLevel:
      type: string
      pattern: '^[0]\.[0-9]{2}|[1.00]$\''
    failureCode:
      $ref: '#/components/schemas/CpFailureCode'
    validityTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
  oneOf:
    - required: [appId]
    - required: [flowDescriptions]

CommunicationIndicator:
  anyOf:
    - type: string
      enum:
        - PERIODICALLY
        - ON_DEMAND
    - type: string
      description: >
        This string provides forward-compatibility with future
        extensions to the enumeration but is not used to encode
        content defined in the present version of this API.
  description: |
    Represents the type of the communication.
    Possible values are:
    - PERIODICALLY: Identifies the UE communicates periodically

```

- ON\_DEMAND: Identifies the UE communicates on demand

StationaryIndication:

- anyOf:
- type: string
  - enum:
    - STATIONARY
    - MOBILE
  - type: string
  - description: >
 

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.
  - description: |
 

Represents the stationarity of the UE.  
Possible values are:

    - STATIONARY: Identifies the UE is stationary
    - MOBILE: Identifies the UE is mobile

CpFailureCode:

- anyOf:
- type: string
  - enum:
    - MALFUNCTION
    - SET\_ID\_DUPLICATED
    - OTHER\_REASON
    - CONFIDENCE\_LEVEL\_NOT\_SUFFICIENT
    - ACCURACY\_LEVEL\_NOT\_SUFFICIENT
  - type: string
  - description: >
 

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.
  - description: |
 

Represents the failure reason of the CP parameter provisioning.  
Possible values are

    - MALFUNCTION: This value indicates that something functions wrongly in CP parameter provisioning or the CP parameter provisioning does not function at all.
    - SET\_ID\_DUPLICATED: The received CP set identifier(s) are already provisioned.
    - OTHER\_REASON: Other reason unspecified.
    - CONFIDENCE\_LEVEL\_NOT\_SUFFICIENT: The received confidence level for the expected UE parameter is not sufficient.
    - ACCURACY\_LEVEL\_NOT\_SUFFICIENT: The received accuracy level for the expected UE parameter is not sufficient.

BatteryIndication:

- anyOf:
- type: string
  - enum:
    - BATTERY\_RECHARGE
    - BATTERY\_REPLACE
    - BATTERY\_NO\_RECHARGE
    - BATTERY\_NO\_REPLACE
    - NO\_BATTERY
  - type: string
  - description: >
 

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.
  - description: |
 

Represents the type of power consumption.  
Possible values are:

    - BATTERY\_RECHARGE: UE powered with rechargeable battery.
    - BATTERY\_REPLACE: UE powered with replaceable battery.
    - BATTERY\_NO\_RECHARGE: UE powered with no rechargeable battery.
    - BATTERY\_NO\_REPLACE: UE powered with no replaceable battery.
    - NO\_BATTERY: UE not battery powered.

TrafficProfile:

- anyOf:
- type: string
  - enum:
    - SINGLE\_TRANS\_UL
    - SINGLE\_TRANS\_DL
    - DUAL\_TRANS\_UL\_FIRST
    - DUAL\_TRANS\_DL\_FIRST
    - MULTI\_TRANS
  - type: string

```

description: >
  This string provides forward-compatibility with future
  extensions to the enumeration but is not used to encode
  content defined in the present version of this API.
description: |
  Represents the type of data transmission.
  Possible values are:
  - SINGLE_TRANS_UL: Uplink single packet transmission.
  - SINGLE_TRANS_DL: Downlink single packet transmission.
  - DUAL_TRANS_UL_FIRST: Dual packet transmission, firstly uplink packet transmission with
  subsequent downlink packet transmission.
  - DUAL_TRANS_DL_FIRST: Dual packet transmission, firstly downlink packet transmission with
  subsequent uplink packet transmission.
  - MULTI_TRANS: Multiple packet transmission.

ScheduledCommunicationType:
  anyOf:
  - type: string
    enum:
      - DOWNLINK
      - UPLINK
      - BIDIRECTIONAL
  - type: string
    description: >
      This string provides forward-compatibility with future
      extensions to the enumeration but is not used to encode
      content defined in the present version of this API.
description: |
  Represents the type of scheduled communication.
  Possible values are:
  - DOWNLINK: Downlink only.
  - UPLINK: Uplink only.
  - BIDIRECTIONAL: Bi-directional.

```

---

## A.11 PfdManagement API

openapi: 3.0.0

info:

```

title: 3gpp-pfd-management
version: 1.3.0
description: |
  API for PFD management.
  © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
  All rights reserved.

```

externalDocs:

```

description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'

```

security:

```

- {}
- oAuth2ClientCredentials: []

```

servers:

```

- url: '{apiRoot}/3gpp-pfd-management/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.

```

paths:

```

/{scsAsId}/transactions:
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS as defined in clause 5.2.4 of 3GPP TS 29.122.
      required: true
      schema:
        type: string
  get:
    summary: Read all or queried PFDs for a given SCS/AS.
    operationId: FetchAllPFDManagementTransactions
    tags:
      - PFD Management Transactions

```

```

parameters:
  - name: external-app-ids
    in: query
    description: The external application identifier(s) of the requested PFD data.
    required: false
    schema:
      type: array
      items:
        type: string
      minItems: 1
responses:
  '200':
    description: OK. All or queried transactions related to the request URI are returned.
    content:
      application/json:
        schema:
          type: array
          items:
            $ref: '#/components/schemas/PfdManagement'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
post:
  summary: Create PFDs for a given SCS/AS and one or more external Application Identifier(s).
  operationId: CreatePFDManagementTransaction
  tags:
    - PFD Management Transactions
  requestBody:
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/PfdManagement'
    description: Create a new transaction for PFD management.
  responses:
    '201':
      description: >
        Created. The transaction was created successfully. The SCEF shall return the created
        transaction in the response content. PfdReport may be included to provide detailed
        failure information for some applications.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/PfdManagement'
      headers:
        Location:
          description: 'Contains the URI of the newly created resource'
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':

```



```

    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    description: >
      The PFDs for all applications were not created successfully. PfdReport is included with
      detailed information.
    content:
      application/json:
        schema:
          type: array
          items:
            $ref: '#/components/schemas/PfdReport'
          minItems: 1
      application/problem+json:
        schema:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  callbacks:
    notificationDestination:
      '{$request.body#/notificationDestination}':
        post:
          requestBody: # contents of the callback message
            required: true
            content:
              application/json:
                schema:
                  type: array
                  items:
                    $ref: '#/components/schemas/PfdReport'
                  minItems: 1
          responses:
            '204':
              description: No Content (successful notification)
            '307':
              $ref: 'TS29122_CommonData.yaml#/components/responses/307'
            '308':
              $ref: 'TS29122_CommonData.yaml#/components/responses/308'
            '400':
              $ref: 'TS29122_CommonData.yaml#/components/responses/400'
            '401':
              $ref: 'TS29122_CommonData.yaml#/components/responses/401'
            '403':
              $ref: 'TS29122_CommonData.yaml#/components/responses/403'
            '404':
              $ref: 'TS29122_CommonData.yaml#/components/responses/404'
            '411':
              $ref: 'TS29122_CommonData.yaml#/components/responses/411'
            '413':
              $ref: 'TS29122_CommonData.yaml#/components/responses/413'
            '415':
              $ref: 'TS29122_CommonData.yaml#/components/responses/415'
            '429':
              $ref: 'TS29122_CommonData.yaml#/components/responses/429'
            '500':
              $ref: 'TS29122_CommonData.yaml#/components/responses/500'
            '503':
              $ref: 'TS29122_CommonData.yaml#/components/responses/503'
            default:
              $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  /{scsAsId}/transactions/{transactionId}:
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of the SCS/AS as defined in clause 5.2.4 of 3GPP TS 29.122.
        required: true
        schema:
          type: string
      - name: transactionId
        in: path
        description: Transaction ID

```

```

    required: true
    schema:
      type: string
  get:
    summary: Read all PFDs for a given SCS/AS and a transaction for one or more external
Application Identifier(s).
    operationId: FetchIndPFDManagementTransaction
    tags:
      - Individual PFD Management Transaction
    responses:
      '200':
        description: OK. The transaction information related to the request URI is returned.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/PfdManagement'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29122_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  put:
    summary: Update PFDs for a given SCS/AS and a transaction for one or more external Application
Identifier(s).
    operationId: UpdateIndPFDManagementTransaction
    tags:
      - Individual PFD Management Transaction
    requestBody:
      required: true
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/PfdManagement'
    description: Change information in PFD management transaction.
    responses:
      '200':
        description: >
          OK. The transaction was modified successfully. The SCEF shall return an updated
transaction in the response content.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/PfdManagement'
      '204':
        description: No Content.
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'

```

```

'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  description: >
    The PFDs for all applications were not updated successfully. PfdReport is included with
    detailed information.
  content:
    application/json:
      schema:
        type: array
        items:
          $ref: '#/components/schemas/PfdReport'
        minItems: 1
    application/problem+json:
      schema:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
patch:
  summary: Modify an existing PFD Management Transaction resource.
  operationId: ModifyIndPFDManagementTransaction
  tags:
    - Individual PFD Management Transaction
  requestBody:
    required: true
    content:
      application/merge-patch+json:
        schema:
          $ref: '#/components/schemas/PfdManagementPatch'
  responses:
    '200':
      description: >
        OK. The PFD Management Transaction was modified successfully. The SCEF shall return an
        updated representation of the resource in the response body.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/PfdManagement'
    '204':
      description: No Content.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      description: >
        The PFDs for all applications were not modified successfully. A set of PFD Report(s) is
        included with detailed information.
      content:
        application/json:
          schema:
            type: array
            items:
              $ref: '#/components/schemas/PfdReport'
            minItems: 1
        application/problem+json:
          schema:
            $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'

```

```

    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  delete:
    summary: Delete PFDs for a given SCS/AS and a transaction for one or more external Application Identifier(s).
    operationId: DeleteIndPFDManagementTransaction
    tags:
      - Individual PFD Management Transaction
    responses:
      '204':
        description: >
          No Content. The transaction was deleted successfully. The content shall be empty.
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  /{scsAsId}/transactions/{transactionId}/applications/{appId}:
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of the SCS/AS as defined in clause 5.2.4 of 3GPP TS 29.122.
        required: true
        schema:
          type: string
      - name: transactionId
        in: path
        description: Transaction ID
        required: true
        schema:
          type: string
      - name: appId
        in: path
        description: Identifier of the application
        required: true
        schema:
          type: string
    get:
      summary: Read PFDs at individual application level.
      operationId: FetchIndApplicationPFDManagement
      tags:
        - Individual Application PFD Management
      responses:
        '200':
          description: OK. The application information related to the request URI is returned.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/PfdData'
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'

```

```

'406':
  $ref: 'TS29122_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
put:
  summary: Update PFDs at individual application level.
  operationId: UpdateIndApplicationPFDManagement
  tags:
    - Individual Application PFD Management
  requestBody:
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/PfdData'
  description: Change information in application.
  responses:
    '200':
      description: >
        OK. The application resource was modified successfully. The SCEF shall return an updated
        application resource in the response content.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/PfdData'
    '204':
      description: No Content.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      description: The PFDs for the application were not updated successfully.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/PfdReport'
        application/problem+json:
          schema:
            $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '409':
      description: The PFDs for the application were not updated successfully.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/PfdReport'
        application/problem+json:
          schema:
            $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      description: The PFDs for the application were not updated successfully.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/PfdReport'
        application/problem+json:
          schema:
            $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'

```

```

    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  patch:
    summary: Update PFDs at individual application level.
    operationId: ModifyIndApplicationPFDManagement
    tags:
      - Individual Application PFD Management
    requestBody:
      required: true
      content:
        application/merge-patch+json:
          schema:
            $ref: '#/components/schemas/PfdData'
        description: Change information in PFD management transaction.
    responses:
      '200':
        description: >
          OK. The transaction was modified successfully. The SCEF shall return an updated
          transaction in the response content.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/PfdData'
      '204':
        description: No Content
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        description: The PFDs for the application were not updated successfully.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/PfdReport'
          application/problem+json:
            schema:
              $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '409':
        description: The PFDs for the application were not updated successfully.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/PfdReport'
          application/problem+json:
            schema:
              $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29122_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        description: The PFDs for the application were not updated successfully.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/PfdReport'
          application/problem+json:
            schema:
              $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  delete:
    summary: Delete PFDs at individual application level.

```

```

operationId: DeleteIndApplicationPFDManagement
tags:
  - Individual Application PFD Management
responses:
  '204':
    description: >
      No Content. The application was deleted successfully. The content shall be empty.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

## components:

```

securitySchemes:
  oAuth2ClientCredentials:
    type: oauth2
    flows:
      clientCredentials:
        tokenUrl: '{tokenUrl}'
        scopes: {}

```

## schemas:

```

PfdManagement:
  description: Represents a PFD management resource for a PFD management request.
  type: object
  properties:
    self:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    supportedFeatures:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/SupportedFeatures'
    pfdDatas:
      type: object
      additionalProperties:
        $ref: '#/components/schemas/PfdData'
      minProperties: 1
      description: >
        Each element uniquely identifies the PFDs for an external application identifier.
        Each element is identified in the map via an external application identifier as key.
        The response shall include successfully provisioned PFD data of application(s).
    pfdReports:
      type: object
      additionalProperties:
        $ref: '#/components/schemas/PfdReport'
      minProperties: 1
      description: >
        Supplied by the SCEF and contains the external application identifiers for which PFD(s)
        are not added or modified successfully. The failure reason is also included.
        Each element provides the related information for one or more external application
        identifier(s) and is identified in the map via the failure identifier as key.
      readOnly: true
    notificationDestination:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    requestTestNotification:
      type: boolean
      description: >
        Set to true by the SCS/AS to request the SCEF to send a test notification as defined
        in clause 5.2.5.3. Set to false or omitted otherwise.
    websocketNotifConfig:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
  required:
    - pfdDatas

```

```

PfdData:
  description: >
    Represents a PFD request to add, update or remove PFD(s) for one external application
    identifier.
  type: object
  properties:
    externalAppId:
      type: string
      description: Each element uniquely external application identifier
    self:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    pfd:
      type: object
      additionalProperties:
        $ref: '#/components/schemas/Pfd'
      description: >
        Contains the PFDs of the external application identifier. Each PFD is identified in
        the map via a key containing the PFD identifier.
    allowedDelay:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSecRm'
    cachingTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSecRo'
    required:
      - externalAppId
      - pfd

Pfd:
  description: Represents a PFD for an external Application Identifier.
  type: object
  properties:
    pfdId:
      type: string
      description: Identifies a PDF of an application identifier.
    flowDescriptions:
      type: array
      items:
        type: string
      minItems: 1
      description: >
        Represents a 3-tuple with protocol, server ip and server port for UL/DL application
        traffic. The content of the string has the same encoding as the IPFilterRule AVP
        value as defined in IETF RFC 6733.
    urls:
      type: array
      items:
        type: string
      minItems: 1
      description: >
        Indicates a URL or a regular expression which is used to match the significant parts
        of the URL.
    domainNames:
      type: array
      items:
        type: string
      minItems: 1
      description: Indicates an FQDN or a regular expression as a domain name matching criteria.
    dnProtocol:
      $ref: '#/components/schemas/DomainNameProtocol'
    required:
      - pfdId

PfdReport:
  description: >
    Represents a PFD report indicating the external application identifier(s) which PFD(s)
    are not added or modified successfully and the corresponding failure cause(s).
  type: object
  properties:
    externalAppIds:
      type: array
      items:
        type: string
      minItems: 1
      description: >
        Identifies the external application identifier(s) which PFD(s) are not added or
        modified successfully
    failureCode:
      $ref: '#/components/schemas/FailureCode'
    cachingTime:

```



```

    $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
  locationArea:
    $ref: '#/components/schemas/UserPlaneLocationArea'
  required:
  - externalAppIds
  - failureCode

UserPlaneLocationArea:
  description: >
    Represents location area(s) of the user plane functions which are unable to enforce the
    provisioned PFD(s) successfully.
  type: object
  properties:
    locationArea:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea'
    locationArea5G:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea5G'
    dnais:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnai'
      minItems: 0
      description: Identifies a list of DNAI which the user plane functions support.

PfdManagementPatch:
  description: >
    Represents the parameters to request the modification of a PFD management transaction
    resource.
  type: object
  properties:
    pfdDatas:
      type: object
      additionalProperties:
        $ref: '#/components/schemas/PfdData'
      minProperties: 1
    notificationDestination:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'

FailureCode:
  anyOf:
  - type: string
    enum:
    - MALFUNCTION
    - RESOURCE_LIMITATION
    - SHORT_DELAY
    - APP_ID_DUPLICATED
    - PARTIAL_FAILURE
    - OTHER_REASON
  - type: string
    description: >
      This string provides forward-compatibility with future
      extensions to the enumeration but is not used to encode
      content defined in the present version of this API.
  description: |
    Represents the failure reason of the PFD management.
    Possible values are:
    - MALFUNCTION: This value indicates that something functions wrongly in PFD provisioning
    or the PFD provisioning does not function at all.
    - RESOURCE_LIMITATION: This value indicates there is resource limitation for PFD storage.
    - SHORT_DELAY: This value indicates that the allowed delay is too short and PFD(s)
    are not stored.
    - APP_ID_DUPLICATED: The received external application identifier(s) are already
    provisioned.
    - PARTIAL_FAILURE: The PFD(s) are not provisioned to all PCEFs/TDFs/SMFs.
    - OTHER_REASON: Other reason unspecified.

DomainNameProtocol:
  anyOf:
  - type: string
    enum:
    - DNS_QNAME
    - TLS_SNI
    - TLS_SAN
    - TSL_SCN
  - type: string
    description: >
      This string provides forward-compatibility with future
      extensions to the enumeration but is not used to encode

```

content defined in the present version of this API.

```
description: |
  Represents the type of Domain Name Protocol.
  Possible values are:
  - DNS_QNAME: Identifies the DNS protocol and the question name in DNS query.
  - TLS_SNI: Identifies the Server Name Indication in TLS ClientHello message.
  - TLS_SAN: Identifies the Subject Alternative Name in TLS ServerCertificate message.
  - TSL_SCN: Identifies the Subject Common Name in TLS ServerCertificate message.
```

---

## A.12 ECRControl API

```
openapi: 3.0.0
info:
  title: 3gpp-ecr-control
  version: 1.2.0
  description: |
    API for enhanced coverage restriction control.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: 3GPP TS 29.122 V17.6.0 T8 reference point for Northbound APIs
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'
security:
  - {}
  - oAuth2ClientCredentials: []
servers:
  - url: '{apiRoot}/3gpp-ecr-control/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /query:
    post:
      summary: Query the status of enhanced coverage restriction for a UE.
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/ECRControl'
      responses:
        '200':
          description: The requested information was returned successfully.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/ECRData'
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29122_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29122_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29122_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'
```

```

/configure:
  post:
    summary: Configure the enhanced coverage restriction for a UE.
    requestBody:
      required: true
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/ECRControl'
    responses:
      '200':
        description: The Enhanced Coverage Restriction setting was configured successfully..
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/ECRData'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29122_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    ECRControl:
      description: Represents the parameters to request Enhanced Coverage Restriction control.
      type: object
      properties:
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        mtcProviderId:
          type: string
          description: Identifies the MTC Service Provider and/or MTC Application.
        scsAsId:
          type: string
          description: Identifier of the SCS/AS.
        externalId:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
        msisdn:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
        ecrDataWbs:
          type: array
          items:
            $ref: '#/components/schemas/PlmnEcRestrictionDataWb'
          minItems: 0
        restrictedPlmnIds:
          type: array
          items:
            $ref: 'TS29122_CommonData.yaml#/components/schemas/PlmnId'
          minItems: 0

```

```

    description: Indicates a complete list (and possibly empty) of serving PLMNs where
Enhanced Coverage shall be restricted. This attribute shall not be present for the query custom
operation.
    allowedPlmnIds:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/PlmnId'
      minItems: 0
    description: Indicates a complete list (and possibly empty) of serving PLMNs where
Enhanced Coverage shall be allowed. This attribute shall not be present for the query custom
operation.
    required:
      - supportedFeatures
    oneOf:
      - required: [externalId]
      - required: [msisdn]
    not:
      required: [restrictedPlmnIds, allowedPlmnIds]
ECRData:
  description: Represents the current visited PLMN (if any) and the current settings of enhanced
coverage restriction.
  type: object
  properties:
    supportedFeatures:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    visitedPlmnId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/PlmnId'
    ecrDataWbs:
      type: array
      items:
        $ref: '#/components/schemas/PlmnEcRestrictionDataWb'
      minItems: 0
    restrictedPlmnIds:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/PlmnId'
      minItems: 0
    description: Indicates a complete list (and possibly empty) of serving PLMNs where
Enhanced Coverage shall be restricted.
    allowedPlmnIds:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/PlmnId'
      minItems: 0
    description: Indicates a complete list (and possibly empty) of serving PLMNs where
Enhanced Coverage shall be allowed.
    required:
      - supportedFeatures
    not:
      required: [restrictedPlmnIds, allowedPlmnIds]
PlmnEcRestrictionDataWb:
  description: Indicates whether enhanced coverage mode is restricted or not for a PLMN ID.
  type: object
  properties:
    plmnId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/PlmnId'
    plmnEcrDataWb:
      $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/EcRestrictionDataWb'
  required:
    - plmnId

```

---

## A.13 NpConfiguration API

```

openapi: 3.0.0
info:
  title: 3gpp-network-parameter-configuration
  version: 1.3.0
  description: |
    API for network parameter configuration.
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'
security:

```

```

- {}
- oAuth2ClientCredentials: []
servers:
- url: '{apiRoot}/3gpp-network-parameter-configuration/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause of 3GPP TS 29.122.
paths:
  /{scsAsId}/configurations:
    get:
      summary: Read all of the active configurations for the SCS/AS.
      operationId: FetchAllNPConfigurations
      tags:
        - Np Configurations
      parameters:
        - name: scsAsId
          in: path
          description: Identifier of the SCS/AS
          required: true
          schema:
            type: string
      responses:
        '200':
          description: OK (Successful get all of the active NpConfigurations for the SCS/AS)
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/NpConfiguration'
                minItems: 0
              description: Network Parameter configurations
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'
    post:
      summary: Creates a new configuration resource for network parameter configuration.
      operationId: CreateNPConfiguration
      tags:
        - Np Configurations
      parameters:
        - name: scsAsId
          in: path
          description: Identifier of the SCS/AS
          required: true
          schema:
            type: string
      requestBody:
        description: new configuration creation
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NpConfiguration'
      callbacks:
        notificationDestination:
          '{$request.body#/notificationDestination}':

```

```

    post:
      requestBody: # contents of the callback message
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/ConfigurationNotification'
      responses:
        '204':
          description: No Content (successful notification)
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29122_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29122_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29122_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  responses:
    '201':
      description: Created (Successful creation of configuration)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NpConfiguration'
      headers:
        Location:
          description: 'Contains the URI of the newly created resource'
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{scsAsId}/configurations/{configurationId}:
  get:
    summary: Read an active configuration for the SCS/AS and the configuration Id.
    operationId: FetchIndNPConfiguration
    tags:
      - Individual Np Configuration

```

```

parameters:
  - name: scsAsId
    in: path
    description: Identifier of the SCS/AS
    required: true
    schema:
      type: string
  - name: configurationId
    in: path
    description: Identifier of the configuration resource
    required: true
    schema:
      type: string
responses:
  '200':
    description: OK (Successful get the active configuration)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NpConfiguration'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Updates/replaces an existing configuration resource.
  operationId: UpdateIndNPConfiguration
  tags:
    - Individual Np Configuration
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS
      required: true
      schema:
        type: string
    - name: configurationId
      in: path
      description: Identifier of the configuration resource
      required: true
      schema:
        type: string
  requestBody:
    description: Parameters to update/replace the existing configuration
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NpConfiguration'
  responses:
    '200':
      description: OK (Successful update of the existing configuration)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NpConfiguration'
    '204':
      description: No Content (Successful update of the configuration)
    '307':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

patch:

summary: Updates/replaces an existing configuration resource.  
 operationId: ModifyIndNpConfiguration

tags:

- Individual Np Configuration

parameters:

- name: scsAsId
  - in: path
  - description: Identifier of the SCS/AS
  - required: true
  - schema:
    - type: string
- name: configurationId
  - in: path
  - description: Identifier of the configuration resource
  - required: true
  - schema:
    - type: string

requestBody:

required: true

content:

application/merge-patch+json:  
 schema:  
 \$ref: '#/components/schemas/NpConfigurationPatch'

responses:

```

'200':
  description: OK. The configuration was modified successfully.
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/NpConfiguration'
'204':
  description: No Content. The configuration was modified successfully.
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'

```



```

    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes an already existing configuration.
  operationId: DeleteIndNPConfiguration
  tags:
    - Individual Np Configuration
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS
      required: true
      schema:
        type: string
    - name: configurationId
      in: path
      description: Identifier of the configuration resource
      required: true
      schema:
        type: string
  responses:
    '204':
      description: No Content (Successful deletion of the existing configuration)
    '200':
      description: OK. (Successful deletion of the existing configuration)
      content:
        application/json:
          schema:
            type: array
            items:
              $ref: 'TS29122_CommonData.yaml#/components/schemas/ConfigResult'
            minItems: 1
      description: The configuration was terminated successfully, the configuration
failure information for group members shall be included if received.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

schemas:
  NpConfiguration:
    description: Represents a network parameters configuration.
    type: object
    properties:
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      mtcProviderId:

```

```

    type: string
    description: Identifies the MTC Service Provider and/or MTC Application.
  dnn:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
  externalId:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'
  msisdn:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Msisdn'
  externalGroupId:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
  maximumLatency:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
  maximumResponseTime:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
  suggestedNumberOfDlPackets:
    type: integer
    minimum: 0
    description: This parameter may be included to identify the number of packets that the
serving gateway shall buffer in case that the UE is not reachable.
  groupReportingGuardTime:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
  notificationDestination:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
  requestTestNotification:
    type: boolean
    description: Set to true by the SCS/AS to request the SCEF to send a test notification as
defined in clause 5.2.5.3. Set to false or omitted otherwise.
  websocketNotifConfig:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
  validityTime:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
  snssai:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
  ueIpAddr:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
  ueMacAddr:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
  oneOf:
    - required: [externalId]
    - required: [msisdn]
    - required: [externalGroupId]
  NpConfigurationPatch:
    description: Represents parameters used to request the modification of a network parameters
configuration resource.
    type: object
    properties:
      maximumLatency:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSecRm'
      maximumResponseTime:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSecRm'
      suggestedNumberOfDlPackets:
        type: integer
        minimum: 0
        description: This parameter may be included to identify the number of packets that the
serving gateway shall buffer in case that the UE is not reachable.
        nullable: true
      groupReportGuardTime:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSecRm'
      validityTime:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTimeRm'
      notificationDestination:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
  ConfigurationNotification:
    description: Represents a configuration result notification.
    type: object
    properties:
      configuration:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      configResults:
        type: array
        items:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ConfigResult'
        minItems: 1
        description: The grouping configuration result notification provided by the SCEF.
      appliedParam:
        $ref: 'TS29122_MonitoringEvent.yaml#/components/schemas/AppliedParameterConfiguration'
  required:
    - configuration

```

## A.14 AsSessionWithQoS API

openapi: 3.0.0

info:

```
title: 3gpp-as-session-with-qos
version: 1.3.0
description: |
  API for setting up an AS session with required QoS.
  © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
  All rights reserved.
```

externalDocs:

```
description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'
```

security:

```
- {}
- oAuth2ClientCredentials: []
```

servers:

```
- url: '{apiRoot}/3gpp-as-session-with-qos/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
```

paths:

```
/{scsAsId}/subscriptions:
  get:
    summary: Read all or queried active subscriptions for the SCS/AS.
    operationId: FetchAllASSessionWithQoSSubscriptions
    tags:
      - AS Session with Required QoS Subscriptions
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of the SCS/AS
        required: true
        schema:
          type: string
      - name: ip-addr
        in: query
        description: The IP address(es) of the requested UE(s).
        required: false
        content:
          application/json:
            schema:
              type: array
              items:
                $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
              minItems: 1
      - name: ip-domain
        in: query
        description: >
          The IPv4 address domain identifier. The attribute may only be provided if IPv4 address
          is included in the ip-addr query parameter.
        required: false
        schema:
          type: string
      - name: mac-addr
        in: query
        description: The MAC address(es) of the requested UE(s).
        required: false
        schema:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
          minItems: 1
    responses:
      '200':
        description: OK.
        content:
          application/json:
            schema:
              type: array
              items:
```

```

    $ref: '#/components/schemas/AsSessionWithQoSSubscription'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

post:

```

summary: Creates a new subscription resource.
operationId: CreateASSessionWithQoSSubscription
tags:
  - AS Session with Required QoS Subscriptions
parameters:
  - name: scsAsId
    in: path
    description: Identifier of the SCS/AS
    required: true
    schema:
      type: string
requestBody:
  description: Request to create a new subscription resource
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/AsSessionWithQoSSubscription'
callbacks:
  notificationDestination:
    '{$request.body#/notificationDestination}':
      post:
        requestBody: # contents of the callback message
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/UserPlaneNotificationData'
  responses:
    '204':
      description: No Content (successful notification)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'

```

```

    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  responses:
    '201':
      description: Created (Successful creation of subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AsSessionWithQoSSubscription'
      headers:
        Location:
          description: 'Contains the URI of the newly created resource'
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      description: Forbidden
      content:
        application/problem+json:
          schema:
            $ref: '#/components/schemas/ProblemDetailsAsSessionWithQoS'
      headers:
        Retry-After:
          description: >
            Indicates the time the AF has to wait before making a new request. It can be a
            non-negative integer (decimal number) indicating the number of seconds the AF
            has to wait before making a new request or an HTTP-date after which the AF can
            retry a new request.
          schema:
            type: string
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{scsAsId}/subscriptions/{subscriptionId}:
  get:
    summary: Read an active subscriptions for the SCS/AS and the subscription Id.
    operationId: FetchIndASSessionWithQoSSubscription
    tags:
      - Individual AS Session with Required QoS Subscription
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of the SCS/AS
        required: true
        schema:
          type: string
      - name: subscriptionId
        in: path
        description: Identifier of the subscription resource
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK (Successful get the active subscription)
        content:
          application/json:
            schema:

```

```

    $ref: '#/components/schemas/AsSessionWithQoSSubscription'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

**put:**

```

summary: Updates/replaces an existing subscription resource.
operationId: UpdateIndASSessionWithQoSSubscription
tags:
  - Individual AS Session with Required QoS Subscription
parameters:
  - name: scsAsId
    in: path
    description: Identifier of the SCS/AS
    required: true
    schema:
      type: string
  - name: subscriptionId
    in: path
    description: Identifier of the subscription resource
    required: true
    schema:
      type: string
requestBody:
  description: Parameters to update/replace the existing subscription
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/AsSessionWithQoSSubscription'
responses:
  '200':
    description: OK (Successful update of the subscription)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/AsSessionWithQoSSubscription'
  '204':
    description: No Content (Successful update of the subscription)
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    description: Forbidden
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/ProblemDetailsAsSessionWithQoS'
headers:
  Retry-After:
    description: >
      Indicates the time the AF has to wait before making a new request. It can be a
      non-negative integer (decimal number) indicating the number of seconds the AF
      has to wait before making a new request or an HTTP-date after which the AF can

```

```

        retry a new request.
    schema:
        type: string
'404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

patch:
    summary: Updates/replaces an existing subscription resource.
    operationId: ModifyIndASSessionWithQoSSubscription
    tags:
        - Individual AS Session with Required QoS Subscription
    parameters:
        - name: scsAsId
          in: path
          description: Identifier of the SCS/AS
          required: true
          schema:
              type: string
        - name: subscriptionId
          in: path
          description: Identifier of the subscription resource
          required: true
          schema:
              type: string
    requestBody:
        required: true
        content:
            application/merge-patch+json:
                schema:
                    $ref: '#/components/schemas/AsSessionWithQoSSubscriptionPatch'
    responses:
        '200':
            description: OK. The subscription was modified successfully.
            content:
                application/json:
                    schema:
                        $ref: '#/components/schemas/AsSessionWithQoSSubscription'
        '204':
            description: No Content. The subscription was modified successfully.
        '307':
            $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
            $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
            $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
            $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
            description: Forbidden
            content:
                application/problem+json:
                    schema:
                        $ref: '#/components/schemas/ProblemDetailsAsSessionWithQoS'
    headers:
        Retry-After:
            description: >
                Indicates the time the AF has to wait before making a new request. It can be a
                non-negative integer (decimal number) indicating the number of seconds the AF
                has to wait before making a new request or an HTTP-date after which the AF can
                retry a new request.
            schema:
                type: string
'404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'

```

```

'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes an already existing subscription.
  operationId: DeleteIndASSessionWithQoSSubscription
  tags:
    - Individual AS Session with Required QoS Subscription
  parameters:
    - name: scsAsId
      in: path
      description: Identifier of the SCS/AS
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true
      schema:
        type: string
  responses:
    '204':
      description: No Content (Successful deletion of the existing subscription)
    '200':
      description: OK (Successful deletion of the existing subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/UserPlaneNotificationData'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

schemas:
  AsSessionWithQoSSubscription:
    description: Represents an individual AS session with required QoS subscription resource.
    type: object
    properties:
      self:

```



```

    $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
  supportedFeatures:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  dnn:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
  snssai:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
  notificationDestination:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
  exterAppId:
    type: string
    description: Identifies the external Application Identifier.
  extGroupId:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
  gpsi:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
  flowInfo:
    type: array
    items:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/FlowInfo'
    minItems: 1
    description: Describe the data flow which requires QoS.
  ethFlowInfo:
    type: array
    items:
      $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/EthFlowDescription'
    minItems: 1
    description: Identifies Ethernet packet flows.
  enEthFlowInfo:
    type: array
    items:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/EthFlowInfo'
    minItems: 1
    description: >
      Identifies the Ethernet flows which require QoS. Each Ethernet flow consists of a flow
      identifier and the corresponding UL and/or DL flows.
  listUeAddrs:
    type: array
    items:
      $ref: '#/components/schemas/UeAddInfo'
    minItems: 1
    description: Identifies the list of UE address.
  multiModalId:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/MultiModalId'
  protoDescUl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/ProtocolDescription'
  protoDescDl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/ProtocolDescription'
  qosReference:
    type: string
    description: Identifies a pre-defined QoS information
  altQoSReferences:
    type: array
    items:
      type: string
    minItems: 1
    description: >
      Identifies an ordered list of pre-defined QoS information. The lower the index of the
      array for a given entry, the higher the priority.
  altQoSReqs:
    type: array
    items:
      $ref:
'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/AlternativeServiceRequirementsData'
    minItems: 1
    description: >
      Identifies an ordered list of alternative service requirements that include individual
      QoS parameter sets. The lower the index of the array for a given entry, the higher the
      priority.
  disUeNotif:
    description: >
      Indicates whether the QoS flow parameters signalling to the UE when the SMF is notified
      by the NG-RAN of changes in the fulfilled QoS situation is disabled (true) or
      not (false). Default value is false. The fulfilled situation is either the QoS profile
      or an Alternative QoS Profile.
    type: boolean
  ueIpv4Addr:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv4Addr'

```

```

ipDomain:
  type: string
ueIpv6Addr:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv6Addr'
macAddr:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
usageThreshold:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/UsageThreshold'
sponsorInfo:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/SponsorInformation'
qosMonInfo:
  $ref: '#/components/schemas/QosMonitoringInformation'
pdvMon:
  $ref: '#/components/schemas/QosMonitoringInformation'
qosDuration:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
qosInactInt:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
directNotifInd:
  type: boolean
  description: >
    Indicates whether the direct event notification is requested (true) or not (false) for
    the provided and/or previously provided QoS monitoring parameter(s).
tscQosReq:
  $ref: '#/components/schemas/TscQosRequirement'
l4sInd:
  $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/UplinkDownlinkSupport'
requestTestNotification:
  type: boolean
  description: >
    Set to true by the SCS/AS to request the SCEF to send a test notification as defined
    in clause 5.2.5.3. Set to false or omitted otherwise.
tempInValidity:
  $ref: 'TS29565_Ntsctsf_QoSandTSCAssistance.yaml#/components/schemas/TemporalInValidity'
websockNotifConfig:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsockNotifConfig'
events:
  description: >
    Represents the list of user plane event(s) to which the SCS/AS requests to subscribe to.
  type: array
  items:
    $ref: '#/components/schemas/UserPlaneEvent'
  minItems: 1
multiModDatFlows:
  type: object
  additionalProperties:
    $ref: '#/components/schemas/AsSessionMediaComponent'
  minProperties: 1
  description: >
    Contains media component data for a single-modal data flow(s).
    The key of the map is the medCompN attribute.
pduSetQosDl:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSetQosPara'
pduSetQosUl:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSetQosPara'
rTlatencyInd:
  type: boolean
  description: >
    Indicates the service data flow needs to meet the Round-Trip (RT) latency requirement of
    the service, when it is included and set to "true".
    The default value is "false" if omitted.
pdb:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/PacketDelBudget'
periodUl:
  $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/DurationMilliSec'
periodDl:
  $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/DurationMilliSec'
qosMonDatRate:
  $ref: '#/components/schemas/QosMonitoringInformation'
avrgWndw:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/AverWindow'
servAuthInfo:
  $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/ServAuthInfo'
qosMonConReq:
  $ref: '#/components/schemas/QosMonitoringInformation'
listUeConsDtRt:
  type: array
  items:

```

```

    $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
    minItems: 1
    description: >
      Identifies the list of UE addresses subject for Consolidated Data Rate monitoring.
  required:
  - notificationDestination

AsSessionWithQoSSubscriptionPatch:
  description: Represents parameters to modify an AS session with specific QoS subscription.
  type: object
  properties:
    exterAppId:
      type: string
      description: Identifies the external Application Identifier.
    flowInfo:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/FlowInfo'
      minItems: 1
      description: Describe the IP data flow which requires QoS.
    ethFlowInfo:
      type: array
      items:
        $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/EthFlowDescription'
      minItems: 1
      description: Identifies Ethernet packet flows.
    enEthFlowInfo:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/EthFlowInfo'
      minItems: 1
      description: >
        Identifies the Ethernet flows which require QoS. Each Ethernet flow consists of a flow
        identifier and the corresponding UL and/or DL flows.
    listUeAddrs:
      type: array
      items:
        $ref: '#/components/schemas/UeAddInfo'
      minItems: 1
      description: Identifies the list of UE address.
    qosReference:
      type: string
      description: Pre-defined QoS reference
    altQoSReferences:
      type: array
      items:
        type: string
      minItems: 1
      description: >
        Identifies an ordered list of pre-defined QoS information. The lower the index of the
        array for a given entry, the higher the priority.
    altQoSReqs:
      type: array
      items:
        $ref:
'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/AlternativeServiceRequirementsData'
      minItems: 1
      description: >
        Identifies an ordered list of alternative service requirements that include individual
        QoS parameter sets. The lower the index of the array for a given entry, the higher the
        priority.
    disUeNotif:
      type: boolean
      description: >
        Indicates whether the QoS flow parameters signalling to the UE when the SMF is notified
        by the NG-RAN of changes in the fulfilled QoS situation is disabled (true) or
        not (false). The fulfilled situation is either the QoS profile or an Alternative QoS
        Profile.
    usageThreshold:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/UsageThresholdRm'
    qosMonInfo:
      $ref: '#/components/schemas/QoSMonitoringInformationRm'
    pdvMon:
      $ref: '#/components/schemas/QoSMonitoringInformationRm'
    directNotifInd:
      type: boolean
      description: >
        Indicates whether the direct event notification is requested (true) or not (false) for

```

```

    the provided QoS monitoring parameter(s).
notificationDestination:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
tscQosReq:
  $ref: '#/components/schemas/TscQosRequirementRm'
l4sInd:
  $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/UplinkDownlinkSupport'
tempInValidity:
  $ref: 'TS29565_Ntsctsf_QoSandTSCAssistance.yaml#/components/schemas/TemporalInValidity'
events:
  description: >
    Represents the updated list of user plane event(s) to which the SCS/AS requests to
    subscribe to.
  type: array
  items:
    $ref: '#/components/schemas/UserPlaneEvent'
  minItems: 1
multiModDatFlows:
  type: object
  additionalProperties:
    $ref: '#/components/schemas/AsSessionMediaComponentRm'
  minProperties: 1
  description: >
    Contains media component data for a single-modal data flow(s).
    The key of the map is the medCompN attribute.
pduSetQosDl:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSetQosParaRm'
pduSetQosUl:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSetQosParaRm'
rTLatencyInd:
  type: boolean
  nullable: true
  description: >
    Indicates the service data flow needs to meet the Round-Trip (RT) latency requirement of
    the service, when it is included and set to "true".
pdb:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/PacketDelBudgetRm'
protoDescUl:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/ProtocolDescriptionRm'
protoDescDl:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/ProtocolDescriptionRm'
periodUl:
  $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/DurationMilliSecRm'
periodDl:
  $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/DurationMilliSecRm'
qosDuration:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSecRm'
qosInactInt:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSecRm'
qosMonDatRate:
  $ref: '#/components/schemas/QosMonitoringInformationRm'
avgWndw:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/AverWindowRm'
qosMonConReq:
  $ref: '#/components/schemas/QosMonitoringInformationRm'
listUeConsDtRt:
  type: array
  items:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
  minItems: 1
  description: >
    Identifies the list of UE addresses subject for Consolidated Data Rate monitoring.

QosMonitoringInformation:
  description: Represents QoS monitoring information.
  type: object
  properties:
    reqQosMonParams:
      type: array
      items:
        $ref:
'TS29512_Npcf_SMPolicyControl.yaml#/components/schemas/RequestedQosMonitoringParameter'
      minItems: 1
    repFreqs:
      type: array
      items:
        $ref: 'TS29512_Npcf_SMPolicyControl.yaml#/components/schemas/ReportingFrequency'
      minItems: 1

```



```

    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    minItems: 1
  rtDelays:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    minItems: 1
  pdmf:
    type: boolean
    description: Represents the packet delay measurement failure indicator.
  ulDataRate:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
  dlDataRate:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
  ulAggrDataRate:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
  dlAggrDataRate:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
  ulConInfo:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
  dlConInfo:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'

```

#### UserPlaneNotificationData:

```

description: Represents the parameters to be conveyed in a user plane event(s) notification.
type: object
properties:
  transaction:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
  eventReports:
    type: array
    items:
      $ref: '#/components/schemas/UserPlaneEventReport'
    minItems: 1
    description: Contains the reported event and applicable information
required:
  - transaction
  - eventReports

```

#### UserPlaneEventReport:

```

description: Represents an event report for user plane.
type: object
properties:
  event:
    $ref: '#/components/schemas/UserPlaneEvent'
  accumulatedUsage:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/AccumulatedUsage'
  flowIds:
    type: array
    items:
      type: integer
    minItems: 1
    description: >
      Identifies the affected flows that were sent during event subscription. It might be
      omitted when the reported event applies to all the flows sent during the subscription.
  multiModFlows:
    type: array
    items:
      $ref: '#/components/schemas/MultiModalFlows'
    minItems: 1
    description: >
      Identifies the the flow filters for the single-modal data flows thatwere sent
      during event subscription.
      It may be omitted when the reported event applies to all the
      single-modal data flows sent during the subscription.
  appliedQosRef:
    type: string
    description: >
      The currently applied QoS reference. Applicable for event QOS_NOT_GUARANTEED or
      SUCCESSFUL_RESOURCES_ALLOCATION.
  altQosNotSuppInd:
    type: boolean
    description: >
      When present and set to true it indicates that the Alternative QoS profiles are not
      supported by the access network. Applicable for event QOS_NOT_GUARANTEED.
  plmnId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/PlmnIdNid'

```

```

qosMonReports:
  type: array
  items:
    $ref: '#/components/schemas/QosMonitoringReport'
  minItems: 1
  description: Contains the QoS Monitoring Reporting information
pdvMonReports:
  type: array
  items:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/PdvMonitoringReport'
  minItems: 1
  description: Contains the PDV Monitoring Reporting information
ratType:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/RatType'
batOffsetInfo:
  $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/BatOffsetInfo'
rttMonReports:
  type: array
  items:
    $ref: '#/components/schemas/QosMonitoringReport'
  minItems: 1
  description: Contains the round trip delay over two SDFs reporting information
qosMonDatRateReps:
  type: array
  items:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/QosMonitoringReport'
  minItems: 1
  description: >
    Contains QoS Monitoring for data rate information. It shall be present when the notified
    event is "QOS_MONITORING" and data rate measurements are available.
aggrDataRateRpts:
  type: array
  items:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/QosMonitoringReport'
  minItems: 1
  description: >
    Contains QoS Monitoring for aggregated data rate information. It shall be present when
    the notified event is "QOS_MONITORING" and data rate measurements are available.
qosMonConInfoReps:
  type: array
  items:
    $ref: '#/components/schemas/QosMonitoringReport'
  minItems: 1
  description: >
    Contains QoS Monitoring for congestion information. It shall be present when the
    notified event is "QOS_MONITORING" and congestion measurements are available.
required:
  - event

TscQosRequirement:
  description: Represents QoS requirements for time sensitive communication.
  type: object
  properties:
    reqGbrDl:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
    reqGbrUl:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
    reqMbrDl:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
    reqMbrUl:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
    maxTscBurstSize:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/ExtMaxDataBurstVol'
    req5Gsdelay:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/PacketDelBudget'
    reqPer:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/PacketErrRate'
    priority:
      $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/TscPriorityLevel'
    tscaiTimeDom:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
    tscaiInputDl:
      $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/TscaiInputContainer'
    tscaiInputUl:
      $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/TscaiInputContainer'
    capBatAdaptation:
      type: boolean
      description: >

```

Indicates the capability for AF to adjust the burst sending time, when it is supported and set to "true". The default value is "false" if omitted.

TscQosRequirementRm:

```

description: >
  Represents the same as the TscQosRequirement data type but with the nullable:true property.
type: object
properties:
  reqGbrDl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRateRm'
  reqGbrUl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRateRm'
  reqMbrDl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRateRm'
  reqMbrUl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRateRm'
  maxTscBurstSize:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/ExtMaxDataBurstVolRm'
  req5Gsdelay:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/PacketDelBudgetRm'
  reqPer:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/PacketErrRateRm'
  priority:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/TscPriorityLevelRm'
  tscaiTimeDom:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/UintegerRm'
  tscaiInputDl:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/TscaiInputContainer'
  tscaiInputUl:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/TscaiInputContainer'
  capBatAdaptation:
    type: boolean
    description: >
      Indicates the capability for AF to adjust the burst sending time, when it is supported
      and set to "true". The default value is "false" if omitted.
    nullable: true

```

AdditionInfoAsSessionWithQos:

```

description: Describes additional error information specific for this API.
type: object
properties:
  acceptableServInfo:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/AcceptableServiceInfo'

```

ProblemDetailsAsSessionWithQos:

```

description: Extends ProblemDetails to also include the acceptable service info.
allOf:
  - $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
  - $ref: '#/components/schemas/AdditionInfoAsSessionWithQos'

```

AsSessionMediaComponent:

```

description: >
  Representmedia component data for a single-modal data flow of a multi-modal service.
type: object
required:
  - medCompN
allOf:
  - not:
      required: [altSerReqs,altSerReqsData]
  - not:
      required: [qosReference,altSerReqsData]
properties:
  flowInfos:
    type: array
    items:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/FlowInfo'
    minItems: 1
    nullable: true
    description: >
      Contains the IP data flow(s) description for a single-modal data flow.
  qosReference:
    type: string
  disUseNotif:
    type: boolean
  altSerReqs:
    type: array
    items:
      type: string
    minItems: 1

```



```

    description: >
      Contains alternative service requirements that include QoS references set
  altSerReqsData:
    type: array
    items:
      $ref:
'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/AlternativeServiceRequirementsData'
    minItems: 1
    description: >
      Contains alternative service requirements that include individual QoS parameter sets.
  marBwDl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
  marBwUl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
  medCompN:
    type: integer
  medType:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/MediaType'
  mirBwDl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
  mirBwUl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
  rTlatencyInd:
    type: boolean
    description: >
      Indicates the service data flow needs to meet the Round-Trip (RT) latency requirement of
      the service, when it is included and set to "true".
      The default value is "false" if omitted.
  pdb:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/PacketDelBudget'
  rTlatencyIndCorreId:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/RttFlowReference'
  pduSetQosDl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSetQosPara'
  pduSetQosUl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSetQosPara'
  l4sInd:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/UplinkDownlinkSupport'
  protoDescDl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/ProtocolDescription'
  protoDescUl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/ProtocolDescription'
  periodUl:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/DurationMilliSec'
  periodDl:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/DurationMilliSec'
  evSubsc:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/EventsSubscReqData'

AsSessionMediaComponentRm:
  description: >
    Represents the AsSessionMediaComponent data type with nullable information.
  type: object
  required:
    - medCompN
  allOf:
    - not:
        required: [altSerReqs,altSerReqsData]
    - not:
        required: [qosReference,altSerReqsData]
  properties:
    flowInfos:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/FlowInfo'
      minItems: 1
      nullable: true
      description: >
        Contains the IP data flow(s) description for a single-modal data flow.
    qosReference:
      type: string
      nullable: true
  altSerReqs:
    type: array
    items:
      type: string
    minItems: 1
    description: >

```

```

    Contains removable alternative service requirements that include set of QoS references
    nullable: true
  altSerReqsData:
    type: array
    items:
      $ref:
'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/AlternativeServiceRequirementsData'
    minItems: 1
    description: >
      Contains removable alternative service requirements that include individual QoS
      parameter sets.
    nullable: true
  disUeNotif:
    type: boolean
    nullable: true
  marBwDl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRateRm'
  marBwUl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRateRm'
  medCompN:
    type: integer
  medType:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/MediaType'
  mirBwDl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRateRm'
  mirBwUl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRateRm'
  rTLatencyInd:
    type: boolean
    nullable: true
    description: >
      Indicates the service data flow needs to meet the Round-Trip (RT) latency requirement of
      the service, when it is included and set to "true".
      The default value is "false" if omitted.
  pdb:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/PacketDelBudgetRm'
  rTLatencyIndCorreId:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/RttFlowReferenceRm'
  pduSetQosDl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSetQosParaRm'
  pduSetQosUl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSetQosParaRm'
  l4sInd:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/UplinkDownlinkSupport'
  protoDescDl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/ProtocolDescriptionRm'
  protoDescUl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/ProtocolDescriptionRm'
  periodUl:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/DurationMilliSecRm'
  periodDl:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/DurationMilliSecRm'
  evSubsc:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/EventsSubscReqDataRm'
    nullable: true

MultiModalFlows:
  description: Represents a flow information within a single-modal data flow.
  type: object
  properties:
    medCompN:
      type: integer
      description: >
        It contains the ordinal number of the single-modal data flow. Identifies the
        single-modal data flow.
    flowIds:
      type: array
      items:
        type: integer
      minItems: 1
      description: >
        Identifies the affected flow(s) within the single-modal data flow
        (identified by the medCompN attribute).
        It may be omitted when all flows are affected.
  required:
    - medCompN

UeAddInfo:

```

```

description: Represent the UE address information.
properties:
  ueIpAddr:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
  portNumber:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/Port'

UserPlaneEvent:
  anyOf:
  - type: string
    enum:
      - SESSION_TERMINATION
      - LOSS_OF_BEARER
      - RECOVERY_OF_BEARER
      - RELEASE_OF_BEARER
      - USAGE_REPORT
      - FAILED_RESOURCES_ALLOCATION
      - QOS_GUARANTEED
      - QOS_NOT_GUARANTEED
      - QOS_MONITORING
      - SUCCESSFUL_RESOURCES_ALLOCATION
      - ACCESS_TYPE_CHANGE
      - PLMN_CHG
      - L4S_NOT_AVAILABLE
      - L4S_AVAILABLE
      - BAT_OFFSET_INFO
      - RT_DELAY_TWO_QOS_FLOWS
      - PACK_DELAY_VAR
  - type: string
    description: >
      This string provides forward-compatibility with future
      extensions to the enumeration but is not used to encode
      content defined in the present version of this API.
  description: |
    Represents the user plane event.
    Possible values are:
    - SESSION_TERMINATION: Indicates that Rx session is terminated.
    - LOSS_OF_BEARER : Indicates a loss of a bearer.
    - RECOVERY_OF_BEARER: Indicates a recovery of a bearer.
    - RELEASE_OF_BEARER: Indicates a release of a bearer.
    - USAGE_REPORT: Indicates the usage report event.
    - FAILED_RESOURCES_ALLOCATION: Indicates the resource allocation is failed.
    - QOS_GUARANTEED: The QoS targets of one or more SDFs are guaranteed again.
    - QOS_NOT_GUARANTEED: The QoS targets of one or more SDFs are not being guaranteed.
    - QOS_MONITORING: Indicates a QoS monitoring event.
    - SUCCESSFUL_RESOURCES_ALLOCATION: Indicates the resource allocation is successful.
    - ACCESS_TYPE_CHANGE: Indicates an Access type change.
    - PLMN_CHG: Indicates a PLMN change.
    - L4S_NOT_AVAILABLE: The ECN marking for L4S of one or more SDFs is not available.
    - L4S_AVAILABLE: The ECN marking for L4S of one or more SDFs is available again.
    - BAT_OFFSET_INFO: Indicates the network provided BAT offset and the optionally adjusted
      periodicity.
    - RT_DELAY_TWO_QOS_FLOWS: Indicates round-trip delay on UL and DL flows over two QoS flows.
    - PACK_DELAY_VAR: Indicates Packet Delay Variation is enabled for the SDF.

```

---

## A.15 MsisdnLessMoSms API

```

openapi: 3.0.0
info:
  title: 3gpp-msisdn-less-mo-sms
  version: 1.2.0
  description: |
    API for MSISDN-less Mobile Originated SMS.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: 3GPP TS 29.122 V17.6.0 T8 reference point for Northbound APIs
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'
security:
  - {}
  - oAuth2ClientCredentials: []
servers:
  - url: '{apiRoot}'
    variables:
      apiRoot:

```

```

    default: https://example.com
    description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /:
    post:
      summary: Deliver a received MSISDN-less MO SMS from the SCEF to the SCS/AS.
      operationId: DeliverMSISDNlessMOSMSNotification
      tags:
        - MSISDN-less MO SMS Notification
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/MsisdnLessMoSmsNotification'
      responses:
        '200':
          description: Success
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/MsisdnLessMoSmsNotificationReply'
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29122_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29122_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29122_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    MsisdnLessMoSmsNotification:
      description: Represents a MSISDN-less MO SMS notification.
      type: object
      properties:
        supportedFeatures:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        sms:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Bytes'
        externalId:
          type: string
          description: External identifier has the form username@realm.
        applicationPort:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Port'
      required:
        - supportedFeatures
        - sms
        - externalId
        - applicationPort
    MsisdnLessMoSmsNotificationReply:
      description: Represents a reply to a MSISDN-less MO SMS notification.

```

```
type: object
properties:
  supportedFeatures:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
required:
  - supportedFeatures
```

---

## A.16 RacsParameterProvisioning API

openapi: 3.0.0

```
info:
  title: 3gpp-racs-parameter-provisioning
  version: 1.2.0
  description: |
    API for provisioning UE radio capability parameters.
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
```

```
externalDocs:
  description: 3GPP TS 29.122 V18.6.0 T8 reference point for Northbound APIs
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.122/'
```

```
security:
  - {}
  - oAuth2ClientCredentials: []
```

```
servers:
  - url: '{apiRoot}/3gpp-racs-pp/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
```

```
paths:
  /{scsAsId}/provisionings:
    parameters:
      - name: scsAsId
        in: path
        description: Identifier of the SCS/AS as defined in clause 5.2.4 of 3GPP TS 29.122.
        required: true
        schema:
          type: string
    get:
      summary: Read all RACS parameter provisionings for a given AF.
      operationId: FetchAllRACSParameterProvisionings
      tags:
        - RACS Parameter Provisionings
      responses:
        '200':
          description: OK. The provisioning information related to the request URI is returned.
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/RacsProvisioningData'
                minItems: 0
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
post:
  summary: Create a new RACS parameter provisioning.
  operationId: CreateRACSParameterProvisioning
  tags:
  - RACS Parameter Provisionings
  requestBody:
    description: create new provisionings for a given SCS/AS.
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/RacsProvisioningData'
  responses:
  '201':
    description: Created. The provisioning was created successfully.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/RacsProvisioningData'
    headers:
      Location:
        description: 'Contains the URI of the newly created resource'
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    description: The RACS data for all RACS IDs were not provisioned successfully.
    content:
      application/json:
        schema:
          type: array
          items:
            $ref: '#/components/schemas/RacsFailureReport'
          minItems: 1
      application/problem+json:
        schema:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
/{scsAsId}/provisionings/{provisioningId}:
  parameters:
  - name: scsAsId
    in: path
    description: Identifier of the SCS/AS as defined in clause 5.2.4 of 3GPP TS 29.122.
    required: true
    schema:
      type: string
  - name: provisioningId
    in: path
    description: Provisioning ID
    required: true
    schema:
      type: string
get:
  summary: Read an existing RACS parameter provisioning.

```

```

operationId: FetchIndRACSPParameterProvisioning
tags:
  - Individual RACS Parameter Provisioning
responses:
  '200':
    description: OK. The provisioning information related to the request URI is returned.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/RacsProvisioningData'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
patch:
  summary: Modify some properties in an existing RACS parameter provisioning.
  operationId: ModifyIndRACSPParameterProvisioning
  tags:
    - Individual RACS Parameter Provisioning
  requestBody:
    description: update an existing parameter provisioning.
    required: true
    content:
      application/merge-patch+json:
        schema:
          $ref: '#/components/schemas/RacsProvisioningDataPatch'
  responses:
    '200':
      description: OK. The provisioning data was updated successfully. The SCEF shall return an
updated provisioning information in the response.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/RacsProvisioningData'
    '204':
      description: >
The provisioning data was updated successfully, and no content is to be sent in
the response message body.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      description: The RACS data for all RACS IDs were not provisioned successfully.

```

```

    content:
      application/json:
        schema:
          type: array
          items:
            $ref: '#/components/schemas/RacsFailureReport'
          minItems: 1
      application/problem+json:
        schema:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
put:
  summary: Modify all properties in an existing RACS parameter provisioning.
  operationId: UpdateIndRACSPParameterProvisioning
  tags:
    - Individual RACS Parameter Provisioning
  requestBody:
    description: update an existing parameter provisioning.
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/RacsProvisioningData'
  responses:
    '200':
      description: >
        OK. The provisioning data was updated successfully. The SCEF shall return an updated
        provisioning information in the response.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/RacsProvisioningData'
    '204':
      description: >
        The provisioning data was updated successfully, and no content is to be sent in
        the response message body.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      description: The RACS data for all RACS IDs were not provisioned successfully.
      content:
        application/json:
          schema:
            type: array
            items:
              $ref: '#/components/schemas/RacsFailureReport'
            minItems: 1
        application/problem+json:
          schema:
            $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
delete:
  summary: Delete a RACS parameter provisioning.
  operationId: DeleteIndRACSPParameterProvisioning

```



```

tags:
- Individual RACS Parameter Provisioning
responses:
'204':
  description: >
    No Content. The provisioning was terminated successfully. The content shall
    be empty.
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

```

```

schemas:
  RacsProvisioningData:
    description: Represents a UE's radio capability data.
    type: object
    properties:
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      supportedFeatures:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      racsConfigs:
        type: object
        additionalProperties:
          $ref: '#/components/schemas/RacsConfiguration'
        minProperties: 1
        description: >
          Identifies the configuration related to manufacturer specific UE radio capability.
          Each element uniquely identifies an RACS configuration for an RACS ID and is identified
          in the map via the RACS ID as key. The response shall include successfully provisioned
          RACS data.
      racsReports:
        type: object
        additionalProperties:
          $ref: '#/components/schemas/RacsFailureReport'
        minProperties: 1
        description: >
          Supplied by the SCEF. Contains the RACS IDs for which the RACS data are not provisioned
          successfully. Any string value can be used as a key of the map.
        readOnly: true
      required:
        - racsConfigs
  RacsFailureReport:
    description: Represents a radio capability data provisioning failure report.
    type: object
    properties:
      racsIds:
        type: array
        items:
          type: string
        minItems: 1
        description: >
          Identifies the RACS ID(s) for which the RACS data are not provisioned successfully.

```

```
failureCode:
  $ref: '#/components/schemas/RacsFailureCode'
required:
- racsIds
- failureCode

RacsConfiguration:
description: Represents a single UE radio capability configuration data.
type: object
properties:
  racsId:
    type: string
    description: >
      The UE radio capability ID provided by the SCS/AS to identify the UE radio capability
      data. See 3GPP TS 23.003 for the encoding.
  racsParamEps:
    type: string
    description: The UE radio capability data in EPS.
  racsParam5Gs:
    type: string
    description: The UE radio capability data in 5GS.
  imeiTacs:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/TypeAllocationCode'
    minItems: 1
    description: Related UE model's IMEI-TAC values.
  anyOf:
    - required: [racsParamEps]
    - required: [racsParam5Gs]
required:
- racsId
- imeiTacs

RacsProvisioningDataPatch:
description: >
  Represents parameters to request the modification of a UE's radio capability data.
type: object
properties:
  racsConfigs:
    type: object
    additionalProperties:
      $ref: '#/components/schemas/RacsConfigurationRm'
    minProperties: 1
    description: >
      Identifies the configuration related to manufacturer specific UE radio capability.
      Each element uniquely identifies an RACS configuration for an RACS ID and is identified
      in the map via the RACS ID as key.

RacsConfigurationRm:
description: >
  Represents the same as the RacsConfiguration data type but with the nullable:true property.
type: object
properties:
  racsParamEps:
    type: string
    description: The UE radio capability data in EPS.
    nullable: true
  racsParam5Gs:
    type: string
    description: The UE radio capability data in 5GS.
    nullable: true
  imeiTacs:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/TypeAllocationCode'
    minItems: 1
    description: Related UE model's IMEI-TAC values.
nullable: true

RacsFailureCode:
anyOf:
- type: string
enum:
- MALFUNCTION
- RESOURCE_LIMITATION
- RACS_ID_DUPLICATED
- OTHER_REASON
```

- type: string  
description: >  
    This string provides forward-compatibility with future  
    extensions to the enumeration but is not used to encode  
    content defined in the present version of this API.  
description: |  
    Represents the failure result of UE radio capability provisioning.  
    Possible values are:  
    - MALFUNCTION: This value indicates that something functions wrongly in RACS provisioning or  
    the RACS provisioning does not function at all.  
    - RESOURCE\_LIMITATION: This value indicates there is resource limitation for RACS data  
    storage.  
    - RACS\_ID\_DUPLICATED: The received RACS identifier(s) are already provisioned.  
    - OTHER\_REASON: Other reason unspecified.

---

## Annex B (informative): TS Skeleton Template

A TS Skeleton Template to be used as a starting point of drafting a 3GPP NBI (i.e. northbound and/or application layer interface) Stage 3 specification is available at the following location:

[https://www.3gpp.org/ftp/information/All\\_Templates/29.xxx-NBI-Stage3-Template.zip](https://www.3gpp.org/ftp/information/All_Templates/29.xxx-NBI-Stage3-Template.zip)

## Annex C (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2017-04	CT3#89					TS skeleton of T8 reference point stage 3. Inclusion of C3-172217, C3-172242, C3-172249 and editorial change from Rapporteur.	0.0.0
2017-05	CT3#90					Inclusion of C3-173256, C3-173257, C3-173306, C3-173318, C3-173323, C3-173329 and editorial change from Rapporteur.	0.1.0
2017-09	CT3#91					Inclusion of C3-174368, C3-174279, C3-174079, C3-174352, C3-174328, C3-174329, C3-174374, C3-174375, C3-174243, C3-174333, C3-174334, C3-174376, C3-174281, C3-174377, C3-174356, C3-174280, C3-174358, C3-174359, C3-174379, C3-174337, C3-174361, C3-174294, C3-174362, C3-174385, C3-174299 and editorial change from Rapporteur.	0.2.0
2017-10	CT3#92					Inclusion of C3-175068, C3-175365, C3-175370, C3-175301, C3-175227, C3-175228, C3-175359, C3-175230, C3-175231, C3-175337, C3-175247, C3-175290, C3-175360 and editorial changes from Rapporteur.	0.3.0
2017-12	CT3#93					Inclusion of C3-176329, C3-176218, C3-176356, C3-176375, C3-176357, C3-176334, C3-176378, C3-176067, C3-176335, C3-176073, C3-176337, C3-176380, C3-176390, C3-176362, C3-176339, C3-176340, C3-176233, C3-176089, C3-176267, C3-176383, C3-176365, C3-176366, C3-176272, C3-176273, C3-176274, C3-176391, C3-176368, C3-176369, C3-176385, C3-176279 and editorial changes from Rapporteur.	0.4.0
2018-01	CT3#94					Inclusion of C3-180349, C3-180329, C3-180222, C3-180078, C3-180285, C3-180081, C3-180330, C3-180331, C3-180084, C3-180332, C3-180333, C3-180290, C3-180291, C3-180089, C3-180234, C3-180334, C3-180294, C3-180237, C3-180295, C3-180296, C3-180297, C3-180337, C3-180357, C3-180136, C3-180298 and editorial changes from Rapporteur.	0.5.0
2018-02	CT3#95					Inclusion of C3-181271, C3-181324, C3-181340, C3-181273, C3-181333, C3-181334, C3-181276, C3-181325 and editorial changes from Rapporteur.	0.6.0
2018-03	CT#79	CP-181053				TS sent to plenary for information	1.0.0
2018-04	CT3#96					Inclusion of C3-182464, C3-182017, C3-182444, C3-182019, C3-182486, C3-182487, C3-182344, C3-182074, C3-182373, C3-182446, C3-182291, C3-182292, C3-182488, C3-182508, C3-182345, C3-182094, C3-182295, C3-182346, C3-182096, C3-182347, C3-182348, C3-182026, C3-182349, C3-182098, C3-182350, C3-182099, C3-182100, C3-182209, C3-182210, C3-182101, C3-182102, C3-182455, C3-182506, C3-182353, C3-182491, C3-182355, C3-182447, C3-182507, C3-182359, C3-182106, C3-182107, C3-182108, C3-182492, C3-182109, C3-182110, C3-182480, C3-182362, C3-182448, C3-182449, C3-182450, C3-182425, C3-182365, C3-182112, C3-182113, C3-182035, C3-182367, C3-182115, C3-182368, C3-182493, C3-182494, C3-182509, C3-182372 and editorial changes from Rapporteur.	1.1.0
2018-05	CT3#97					Inclusion of C3-183028, C3-183029, C3-183030, C3-183474, C3-183051, C3-183475, C3-183476, C3-183054, C3-183055, C3-183056, C3-183478, C3-183479, C3-183336, C3-183337, C3-183832, C3-183340, C3-183609, C3-183611, C3-183612, C3-183833, C3-183614, C3-183834, C3-183883, C3-183616, C3-183343, C3-183088, C3-183617, C3-183618, C3-183741, C3-183625, C3-183626, C3-183122, C3-183123, C3-183124, C3-183635, C3-183792, C3-183634, C3-183619, C3-183786, C3-183082, C3-183083, C3-183084, C3-183622, C3-183835, C3-183624, C3-183627, C3-183075, C3-183737, C3-183836, C3-183419, C3-183630, C3-183066, C3-183347, C3-183861, C3-183788, C3-183862, C3-183789, C3-183637, C3-183837, C3-183863, C3-183639, C3-183864, C3-183067, C3-183068, C3-183069, C3-183641, C3-183059, C3-183071, C3-183606, C3-183779 and editorial changes from Rapporteur.	1.2.0
2018-06	CT#80	CP-181038				TS sent to plenary for approval	2.0.0
2018-06	CT#80	CP-181038				TS approved by plenary	15.0.0
2018-09	CT#81	CP-182022	0001	2	F	MonitoringEvent API OpenAPI schema	15.1.0
2018-09	CT#81	CP-182022	0002	2	F	ChargeableParty API OpenAPI schema	15.1.0
2018-09	CT#81	CP-182022	0003	2	F	GMDviaMBMSbyMB2 API OpenAPI schema	15.1.0
2018-09	CT#81	CP-182022	0004	2	F	GMDviaMBMSbyxMB API OpenAPI schema	15.1.0
2018-09	CT#81	CP-182022	0005	2	F	ReportingNetworkStatus API OpenAPI schema	15.1.0
2018-09	CT#81	CP-182022	0006	2	F	ECRControl API OpenAPI schema	15.1.0
2018-09	CT#81	CP-182022	0007	2	F	NpConfiguration API OpenAPI schema	15.1.0
2018-09	CT#81	CP-182022	0008	2	F	AsSessionWithQoS API OpenAPI schema	15.1.0
2018-09	CT#81	CP-182022	0009		F	Update the Error Handling	15.1.0
2018-09	CT#81	CP-182022	0010	2	F	CpProvisioning OpenAPI schema	15.1.0

2018-09	CT#81	CP-182022	0011	2	F	Remove the monitoring configuration for a group	15.1.0
2018-09	CT#81	CP-182022	0012	1	F	Resource description in Procedure subclauses	15.1.0
2018-09	CT#81	CP-182022	0013	1	F	Monitoring event API Update	15.1.0
2018-09	CT#81	CP-182022	0014	2	F	BDT API Update	15.1.0
2018-09	CT#81	CP-182022	0015		F	Network Parameter Configuration API Update	15.1.0
2018-09	CT#81	CP-182022	0016	1	F	Complete the common openAPI definition	15.1.0
2018-09	CT#81	CP-182022	0017	2	F	Complete the openAPI definition for BDT API	15.1.0
2018-09	CT#81	CP-182022	0018		F	NIDD API cleanup	15.1.0
2018-09	CT#81	CP-182022	0019	2	F	Complete the openAPI definition for NIDD API	15.1.0
2018-09	CT#81	CP-182022	0020	1	F	One-time monitoring	15.1.0
2018-09	CT#81	CP-182178	0021	3	F	PATCH data type in ChargeableParty API	15.1.0
2018-09	CT#81	CP-182022	0022	1	F	Procedure correction of PFD management error handling	15.1.0
2018-09	CT#81	CP-182022	0023	2	F	Complete the openAPI definition for PFD API	15.1.0
2018-09	CT#81	CP-182022	0024	1	F	Essential Corrections on TS 29.122	15.1.0
2018-09	CT#81	CP-182022	0025	2	F	Alignment of error codes with TS 29.500	15.1.0
2018-09	CT#81	CP-182022	0026	2	F	OpenAPI updates for Device Triggering	15.1.0
2018-09	CT#81	CP-182022	0027	1	F	OpenAPI updates for MSISDN-less Mobile Originated SMS	15.1.0
2018-09	CT#81	CP-182022	0028	2	F	Monitoring event report	15.1.0
2018-09	CT#81	CP-182022	0030		F	Add cause in ProblemDetails data type	15.1.0
2018-09	CT#81	CP-182022	0031	1	F	Remove format keyword for 3GPP defined data type	15.1.0
2018-09	CT#81	CP-182022	0032		F	Correct supported features	15.1.0
2018-09	CT#81	CP-182022	0033		F	Correct ConfigResult data type for Monitoring API	15.1.0
2018-09	CT#81	CP-182022	0034		F	Correct reachability type in monitoring API	15.1.0
2018-09	CT#81	CP-182022	0035		F	Add HSS interaction for NIDD configuration	15.1.0
2018-09	CT#81	CP-182022	0036		F	Correct NiddConfigurationPatch data type	15.1.0
2018-09	CT#81	CP-182179	0037	2	F	Removable attribute definition for NIDD configuration	15.1.0
2018-09	CT#81	CP-182180	0038	2	F	Correct MT NIDD procedure	15.1.0
2018-09	CT#81	CP-182022	0039	1	F	Correct group NIDD procedure	15.1.0
2018-09	CT#81	CP-182022	0040		F	Device Trigger cleanup	15.1.0
2018-09	CT#81	CP-182022	0041		F	Removable attribute definition for PFD management	15.1.0
2018-09	CT#81	CP-182181	0042	2	F	Correct PFD error code	15.1.0
2018-09	CT#81	CP-182022	0043		F	Removable attribute definition for NP configuration	15.1.0
2018-09	CT#81	CP-182022	0044		F	Correct ConfigResult data type for NP Provisioning API	15.1.0
2018-09	CT#81	CP-182022	0045		F	Removable attribute definition for AS required QoS	15.1.0
2018-09	CT#81	CP-182022	0047		F	Version numbering update	15.1.0
2018-09	CT#81	CP-182022	0048	1	F	Removal of external docs field	15.1.0
2018-09	CT#81	CP-182203	0049		F	paths property in A.2	15.1.0
2018-12	CT#82	CP-183116	0050		F	File naming for Common data type	15.2.0
2018-12	CT#82	CP-183116	0051		F	UE corrections	15.2.0
2018-12	CT#82	CP-183116	0052	2	F	ExternalDocs field	15.2.0
2018-12	CT#82	CP-183116	0053	7	F	Enhancement of LocationArea	15.2.0
2018-12	CT#82	CP-183116	0054		F	Data type for Individual TMGI Allocation PATCH operation	15.2.0
2018-12	CT#82	CP-183127	0055	2	F	Correction on Accuracy level	15.2.0
2018-12	CT#82	CP-183116	0056	2	F	Correction on type ConfigResult	15.2.0
2018-12	CT#82	CP-183128	0057	5	F	Monitoring Event Report	15.2.0
2018-12	CT#82	CP-183116	0059		F	Correct server definition	15.2.0
2018-12	CT#82	CP-183116	0060		F	Correct data type for roamingStatus	15.2.0
2018-12	CT#82	CP-183116	0061		F	Correct external identifier and msisdn	15.2.0
2018-12	CT#82	CP-183116	0062		F	Correct common data definition	15.2.0
2018-12	CT#82	CP-183116	0063	3	F	Additional data type clarification in openAPI	15.2.0
2018-12	CT#82	CP-183116	0064		F	Correct Chargeable Party	15.2.0
2018-12	CT#82	CP-183116	0065	2	F	Correct GMD via MB2	15.2.0
2018-12	CT#82	CP-183116	0066	3	F	Correct GMD via xMB	15.2.0
2018-12	CT#82	CP-183116	0067	5	F	Correct MT NIDD	15.2.0
2018-12	CT#82	CP-183116	0068		F	Correct monitoring API	15.2.0
2018-12	CT#82	CP-183116	0069		F	Correct CP provisioning	15.2.0
2018-12	CT#82	CP-183116	0070		F	Correct Device trigger	15.2.0
2018-12	CT#82	CP-183116	0071		F	Correct PFD management	15.2.0
2018-12	CT#82	CP-183116	0072		F	Correct report network status	15.2.0
2018-12	CT#82	CP-183116	0073		F	Correct NP provisioning	15.2.0
2018-12	CT#82	CP-183116	0074		F	Correct MO SMS	15.2.0
2018-12	CT#82	CP-183116	0075		F	Correct AS session with QoS	15.2.0
2018-12	CT#82	CP-183116	0076	3	F	Error handling	15.2.0
2018-12	CT#82	CP-183116	0077	1	F	Content type	15.2.0
2018-12	CT#82	CP-183116	0078	2	F	Supporting Ethernet UE in Chargeable Party and AF session with QoS	15.2.0
2018-12	CT#82	CP-183116	0079	2	F	Security adaptation for T8 APIs with CAPIF	15.2.0
2018-12	CT#82	CP-183116	0080	1	F	Remove empty array or map for applicable attributes	15.2.0
2018-12	CT#82	CP-183116	0081	3	F	Presence conditions in yaml file	15.2.0
2018-12	CT#82	CP-183116	0082		F	Remove format keyword for TimeOfDay data type	15.2.0
2018-12	CT#82	CP-183116	0083	2	F	Additional external group ID for number of UE in an area	15.2.0

2018-12	CT#82	CP-183116	0084		F	Correct eDRX cycle length	15.2.0
2018-12	CT#82	CP-183116	0086		F	Correct PLMN ID in monitoring API	15.2.0
2018-12	CT#82	CP-183116	0088		F	Missing ECRData in ECR configuration response	15.2.0
2018-12	CT#82	CP-183116	0089		F	Correct GMD via MBMS	15.2.0
2018-12	CT#82	CP-183116	0090		F	Missing UE ID in GMD acknowledgement	15.2.0
2018-12	CT#82	CP-183116	0091	1	F	RDS indication in MT NIDD acknowledgement	15.2.0
2018-12	CT#82	CP-183116	0092	1	F	Correct pfdDatas cardinality in PFD management	15.2.0
2018-12	CT#82	CP-183116	0093	1	F	Correct NP configuration yaml definition	15.2.0
2018-12	CT#82	CP-183116	0094	6	F	Different results in CP parameter sets provisioning	15.2.0
2018-12	CT#82	CP-183116	0095		F	Correct server URI in Device Trigger	15.2.0
2018-12	CT#82	CP-183116	0096		F	Implementation of Binary data	15.2.0
2018-12	CT#82	CP-183116	0097		F	Missed GET for resource GMD via MBMS by xMB	15.2.0
2018-12	CT#82	CP-183116	0098	1	F	Notification URI Consistency_ChargeableParty	15.2.0
2018-12	CT#82	CP-183116	0099	1	F	Notification URI for GMDviaMBMSbyMB2 API	15.2.0
2018-12	CT#82	CP-183116	0100	1	F	Notification URI for GMDviaMBMSbyxMB API	15.2.0
2018-12	CT#82	CP-183116	0101		F	Resource usage and Notification URI for NIDD API	15.2.0
2018-12	CT#82	CP-183116	0102	2	F	Security field	15.2.0
2018-12	CT#82	CP-183116	0103	1	F	Status code support for AsSessionWithQoS API	15.2.0
2018-12	CT#82	CP-183116	0104	1	F	Status code support for ChargeableParty API	15.2.0
2018-12	CT#82	CP-183116	0105	2	F	Status code support for CpProvisioning API	15.2.0
2018-12	CT#82	CP-183116	0106	1	F	Status code support for DeviceTriggering API	15.2.0
2018-12	CT#82	CP-183116	0107	1	F	Status code support for ECRControl API	15.2.0
2018-12	CT#82	CP-183116	0108	1	F	Status code support for GMDviaMBMSbyMB2 API	15.2.0
2018-12	CT#82	CP-183116	0109	2	F	Status code support for GMDviaMBMSbyxMB API	15.2.0
2018-12	CT#82	CP-183116	0110	3	F	Status code support for MonitoringEvent API	15.2.0
2018-12	CT#82	CP-183116	0111	1	F	Status code support for MsisdnLessMoSms API	15.2.0
2018-12	CT#82	CP-183116	0112	2	F	Status code support for NIDD API	15.2.0
2018-12	CT#82	CP-183116	0113	1	F	Status code support for NpConfiguration API	15.2.0
2018-12	CT#82	CP-183116	0114	1	F	Status code support for PfdManagement API	15.2.0
2018-12	CT#82	CP-183116	0115	1	F	Status code support for ReportingNetworkStatus API	15.2.0
2018-12	CT#82	CP-183116	0116	1	F	Status code support for ResourceManagementOfBdt API	15.2.0
2018-12	CT#82	CP-183116	0117	1	F	Location header	15.2.0
2018-12	CT#82	CP-183116	0118	2	F	API Version Update	15.2.0
2018-12	CT#82	CP-183116	0119	1	F	Link of the created resources for AsSessionWithQoS API	15.2.0
2018-12	CT#82	CP-183116	0120	1	F	Link of the created resources for ChargeableParty API	15.2.0
2018-12	CT#82	CP-183116	0121	1	F	Link of the created resources for CpProvisioning API	15.2.0
2018-12	CT#82	CP-183116	0122	1	F	Link of the created resourcesfor DeviceTriggering API	15.2.0
2018-12	CT#82	CP-183116	0123	1	F	Link of the created resources for GMDviaMBMSbyMB2 API	15.2.0
2018-12	CT#82	CP-183116	0124	1	F	Link of the created resources for GMDviaMBMSbyxMB API	15.2.0
2018-12	CT#82	CP-183116	0125	1	F	Link of the created resources for MonitoringEvent API	15.2.0
2018-12	CT#82	CP-183116	0126	1	F	Link of the created resources for NIDD API	15.2.0
2018-12	CT#82	CP-183116	0127	1	F	Link of the created resources for NpConfiguration API	15.2.0
2018-12	CT#82	CP-183116	0128	1	F	Link of the created resources for PfdManagement API	15.2.0
2018-12	CT#82	CP-183116	0129	1	F	Link of the created resources for ReportingNetworkStatus API	15.2.0
2018-12	CT#82	CP-183116	0130	1	F	Link of the created resources for ResourceManagementOfBdt API	15.2.0
2018-12	CT#82	CP-183116	0132		F	API version for MonitoringEvent API	15.2.0
2018-12	CT#82	CP-183116	0133		F	Successful code corrections for group message delivery APIs	15.2.0
2018-12	CT#82	CP-183117	0087	2	B	PDN connectivity status monitoring	16.0.0
2019-03	CT#83	CP-190109	0138	4	F	PFD extension	16.1.0
2019-03	CT#83	CP-190125	0140		F	Remove SHORT_DELAY_STORED	16.1.0
2019-03	CT#83	CP-190125	0142	3	F	Renew TMGI expiration	16.1.0
2019-03	CT#83	CP-190125	0144	2	F	Corrections related to mandatory features and and MonitoringEvent API errors	16.1.0
2019-03	CT#83	CP-190125	0146	1	F	Correction on MacAddr48 data type reference in the OpenAPI file	16.1.0
2019-03	CT#83	CP-190159	0148	2	F	API Version Update	16.1.0
2019-03	CT#83	CP-190129	0149	2	F	Moving xMB stage 2 to TS 26.348	16.1.0
2019-06	CT#84	CP-191073	0151	1	A	Correction on 5G location area	16.2.0
2019-06	CT#84	CP-191092	0153	1	A	Failure case when feature required by the monitoring type unsupported	16.2.0
2019-06	CT#84	CP-191073	0155	1	A	5G feature for Number of UEs in an area notification	16.2.0
2019-06	CT#84	CP-191210	0156	4	B	Notification of Downlink data delivery status and availability after DDN failure notification for multiple Afs	16.2.0
2019-06	CT#84	CP-191090	0157	1	B	Add External Group Id	16.2.0
2019-06	CT#84	CP-191092	0160	1	A	Add openAPI definition for 200 OK in MonitoringEvent API	16.2.0
2019-06	CT#84	CP-191100	0163		B	Feature applicability for PDN connectivity status	16.2.0
2019-06	CT#84	CP-191099	0165	1	A	Support of MTC Provider Id	16.2.0
2019-06	CT#84	CP-191070	0166	1	B	Network parameter provisioning support	16.2.0
2019-06	CT#84	CP-191092	0168		A	Add openAPI definition for PUT in BDT API	16.2.0
2019-06	CT#84	CP-191103	0171	1	B	PFD management notification	16.2.0
2019-06	CT#84	CP-191100	0173	1	F	Clarify number of UE in an area	16.2.0
2019-06	CT#84	CP-191070	0174		F	Update reference to TS 24.250	16.2.0



2019-06	CT#84	CP-191105	0175	2	B	BDT Warning Notification Support	16.2.0
2019-06	CT#84	CP-191092	0177	1	A	Precedence and storage of T8 OpenAPI files	16.2.0
2019-06	CT#84	CP-191092	0179	2	A	Copyright Note in YAML file	16.2.0
2019-06	CT#84	CP-191101	0181	2	F	API version Update	16.2.0
2019-09	CT#85	CP-192139	0183	1	A	Correct presence condition in PFD definition	16.3.0
2019-09	CT#85	CP-192158	0184	2	B	Enhancement of Monitoring and Network Parameter Configuration	16.3.0
2019-09	CT#85	CP-192156	0185	1	B	Support a set of MAC addresses in traffic filter	16.3.0
2019-09	CT#85	CP-192165	0187	2	B	Support parameter provisioning in RACS	16.3.0
2019-09	CT#85	CP-192200	0188	3	B	Accurate UE moving trajectory definition	16.3.0
2019-09	CT#85	CP-192157	0189	1	B	Removal of a BDT warning notification request	16.3.0
2019-09	CT#85	CP-192158	0190	1	F	Correction on MSISDN	16.3.0
2019-09	CT#85	CP-192158	0191	1	F	Battery Indication and Traffic Profile for CpProvisioning API	16.3.0
2019-09	CT#85	CP-192158	0192	2	F	Northbound API registration and discovery	16.3.0
2019-09	CT#85	CP-192158	0193	1	F	Corrections on monitoring type	16.3.0
2019-09	CT#85	CP-192158	0194	1	F	Notification of resource allocation failure	16.3.0
2019-09	CT#85	CP-192197	0196	3	B	PFD management partial failure	16.3.0
2019-09	CT#85	CP-192163	0199		F	Correction on MSISDN	16.3.0
2019-09	CT#85	CP-192173	0200		F	OpenAPI version update for TS 29.122 Rel-16	16.3.0
2019-12	CT#86	CP-193216	0158	9	B	Update to NIDD APIs for RDS Dynamic Port Management	16.4.0
2019-12	CT#86	CP-193179	0202	1	B	Nnef_APISupportCapability Service	16.4.0
2019-12	CT#86	CP-193179	0203	1	B	Scheduled communication type	16.4.0
2019-12	CT#86	CP-193198	0204		F	Correct UMT location area	16.4.0
2019-12	CT#86	CP-193199	0205	2	B	RDS port mismatch in NIDD	16.4.0
2019-12	CT#86	CP-193199	0206		F	Reference update: RFC 8259	16.4.0
2019-12	CT#86	CP-193206	0208	4	A	Correct SCEF aggregation	16.4.0
2019-12	CT#86	CP-193209	0209	3	B	Complete RACS details	16.4.0
2019-12	CT#86	CP-193199	0210	1	B	BatteryIndication data type	16.4.0
2019-12	CT#86	CP-193220	0212	3	B	PFD partial failure notification	16.4.0
2019-12	CT#86	CP-193206	0215	1	A	Correct application port	16.4.0
2019-12	CT#86	CP-193179	0216	1	B	Support API capability change based on API filter	16.4.0
2019-12	CT#86	CP-193198	0217	1	F	openAPI correction for ExNotification	16.4.0
2019-12	CT#86	CP-193212	0218	1	F	Update of API version and TS version in OpenAPI file	16.4.0
2020-03	CT#87e	CP-200198	0220	1	B	Update of the DDD status event and availability of DDN failure event	16.5.0
2020-03	CT#87e	CP-200202	0222	1	B	QoS Monitoring Report	16.5.0
2020-03	CT#87e	CP-200198	0223		F	Clarify empty array for API capability change	16.5.0
2020-03	CT#87e	CP-200144	0224	1	B	Support PDU session status	16.5.0
2020-03	CT#87e	CP-200208	0225	1	B	Support BDT policy candidates in notification	16.5.0
2020-03	CT#87e	CP-200212	0226	1	B	Add alternative QoS requirements	16.5.0
2020-03	CT#87e	CP-200219	0227	1	B	Adding data type for the BDT Reference ID with "nullable: true" property	16.5.0
2020-03	CT#87e	CP-200209	0231		F	Enumeration PdnEstablishmentOptionsRm and "nullable" keyword	16.5.0
2020-03	CT#87e	CP-200216	0232		F	Update of OpenAPI version and TS version in externalDocs field	16.5.0
2020-06	CT#88e	CP-201194	0228	7	B	Supporting the Location Services via NEF	16.6.0
2020-06	CT#88e	CP-201243	0233	1	F	Addition of IMEI/TAC values for RACS operations	16.6.0
2020-06	CT#88e	CP-201243	0234	3	F	Corrections to UE radio capability configuration data	16.6.0
2020-06	CT#88e	CP-201243	0235	1	F	Missing bullet in introduction	16.6.0
2020-06	CT#88e	CP-201241	0237	1	A	Event of Usage Threshold	16.6.0
2020-06	CT#88e	CP-201235	0239	3	F	Periodic reporting by Nnef	16.6.0
2020-06	CT#88e	CP-201210	0241	1	F	Correction to the DDD status event	16.6.0
2020-06	CT#88e	CP-201241	0243		A	Correct GMDviaMBMSbyxMB openAPI error	16.6.0
2020-06	CT#88e	CP-201292	0245	2	A	Correct NIDD API	16.6.0
2020-06	CT#88e	CP-201213	0246		F	Correct data type used in QoS monitoring	16.6.0
2020-06	CT#88e	CP-201235	0247		F	Storage of YAML files	16.6.0
2020-06	CT#88e	CP-201276	0248	2	F	Traffic descriptor for xBDT	16.6.0
2020-06	CT#88e	CP-201256	0249	1	F	URI of the SCEF northbound APIs	16.6.0
2020-06	CT#88e	CP-201213	0250	1	F	Correction to QoS monitoring	16.6.0
2020-06	CT#88e	CP-201243	0252		F	Avoid using the same data type for PUT and PATCH	16.6.0
2020-06	CT#88e	CP-201250	0253	1	B	Complete and fix RDS Port Management	16.6.0
2020-06	CT#88e	CP-201246	0254	1	F	Move 5G specific procedure to TS 29.522	16.6.0
2020-06	CT#88e	CP-201210	0255	1	B	Support of Enhanced Coverage Mode control	16.6.0
2020-06	CT#88e	CP-201234	0256		F	Removal of open issue on external Group Id for ResourceManagementOfBdt API	16.6.0
2020-06	CT#88e	CP-201235	0257	1	F	Optionality of ProblemDetails	16.6.0
2020-06	CT#88e	CP-201241	0259	1	A	Correction on PfdManagement for PfdManagement API	16.6.0
2020-06	CT#88e	CP-201241	0261	1	A	Corrections on APP_ID_DUPLICATED error for PfdManagement API	16.6.0
2020-06	CT#88e	CP-201241	0263	1	A	Corrections on SET_ID_DUPLICATED error for CpProvisioning API	16.6.0
2020-06	CT#88e	CP-201235	0264		F	required field in OpenAPI file	16.6.0
2020-06	CT#88e	CP-201235	0265	1	F	Supported headers, Resource Data type and Operation Name	16.6.0
2020-06	CT#88e	CP-201255	0267		F	Update of OpenAPI version and TS version in externalDocs field	16.6.0

2020-09	CT#89e	CP-202070	0271		A	Failure response for AsSessionWithQoS API	16.7.0
2020-09	CT#89e	CP-202070	0273		A	Same IPv4 address for different PDU sessions	16.7.0
2020-09	CT#89e	CP-202077	0274	1	F	Remove 5G procedures to TS 29.522	16.7.0
2020-09	CT#89e	CP-202072	0275	1	F	Unique RACS Id	16.7.0
2020-09	CT#89e	CP-202072	0276		F	Failure response	16.7.0
2020-09	CT#89e	CP-202048	0277	1	F	Initial report for multiple PDN connections	16.7.0
2020-09	CT#89e	CP-202070	0281		A	Use correct code for deleting individual ChargeableParty transaction	16.7.0
2020-09	CT#89e	CP-202021	0283	2	A	Removal of an established AS session	16.7.0
2020-09	CT#89e	CP-202072	0284		F	Usage of PUT and PATCH	16.7.0
2020-09	CT#89e	CP-202070	0286		A	Corrections to mtcProviderId	16.7.0
2020-09	CT#89e	CP-202086	0287	1	F	Updates NpConfiguration with mtcProviderId	16.7.0
2020-09	CT#89e	CP-202084	0289		F	Update of OpenAPI version and TS version in externalDocs field	16.7.0
2020-12	CT#90e	CP-203139	0291	1	F	TS 29.122 Essential Corrections and alignments	16.8.0
2020-12	CT#90e	CP-203079	0294	2	F	Essential Corrections to eLCS related monitoring events	16.8.0
2020-12	CT#90e	CP-203132	0295	1	F	Correction to Alternative QoS Parameter	16.8.0
2020-12	CT#90e	CP-203139	0296		F	Storage of YAML files in 3GPP Forge	16.8.0
2020-12	CT#90e	CP-203108	0299	1	F	Corrections to MonitoringEventReport	16.8.0
2020-12	CT#90e	CP-203111	0300	1	F	Incorrect definition of QoSMonitoringInformation	16.8.0
2020-12	CT#90e	CP-203139	0301	1	F	Callback URI correction	16.8.0
2020-12	CT#90e	CP-203133	0305		A	Successful response code for Event Notification	16.8.0
2020-12	CT#90e	CP-203133	0307	1	A	Failure response for SCEF northbound APIs	16.8.0
2020-12	CT#90e	CP-203109	0308		F	Correction on Location Service via NEF	16.8.0
2020-12	CT#90e	CP-203131	0310	1	F	Protocol or application errors	16.8.0
2020-12	CT#90e	CP-203133	0312	1	A	Solve IP address overlapping for Chargeable Party	16.8.0
2020-12	CT#90e	CP-203100	0314	2	A	Correction to NIDD configuration cancellation procedure	16.8.0
2020-12	CT#90e	CP-203133	0316	1	A	Correction to device triggering recall procedure	16.8.0
2020-12	CT#90e	CP-203152	0322		F	Update of OpenAPI version and TS version in externalDocs field	16.8.0
2020-12	CT#90e	CP-203140	0290		F	DateTime Enhancement	17.0.0
2020-12	CT#90e	CP-203137	0293	1	B	Adding Support for Indicating Serialization Format in RDS	17.0.0
2020-12	CT#90e	CP-203153	0323		F	Update of OpenAPI version and TS version in externalDocs field	17.0.0
2020-12	CT#90e	CP-203149	0324		F	Failure authorization result of BDT reference Id for ChargeableParty API request	17.0.0
2021-03	CT#91e	CP-210224	0325		F	Clarification of eLCS feature applicability only to 5G	17.1.0
2021-03	CT#91e	CP-210210	0327		A	Correct applied QoS reference for QoS not guaranteed	17.1.0
2021-03	CT#91e	CP-210210	0331	2	A	Disable UE notifications at changes related to Alternative QoS Profiles	17.1.0
2021-03	CT#91e	CP-210207	0333	2	A	Last known location report	17.1.0
2021-03	CT#91e	CP-210207	0335		A	Default value of accuracy	17.1.0
2021-03	CT#91e	CP-210207	0337	3	A	Support Redirection for MonitoringEvent API	17.1.0
2021-03	CT#91e	CP-210219	0338	1	F	OpenAPI "description" fields in data type definitions	17.1.0
2021-03	CT#91e	CP-210218	0339		F	Update of "description" field for map data types	17.1.0
2021-03	CT#91e	CP-210218	0340		F	OpenAPI reference	17.1.0
2021-03	CT#91e	CP-210189	0344		A	Correction to AF ID in ECRControl API	17.1.0
2021-03	CT#91e	CP-210189	0346		A	Correction to mtcProviderId in ECRControl API	17.1.0
2021-03	CT#91e	CP-210221	0352	1	F	Removal of invalid tabulations in some attributes description in the MonitoringEvent API OpenAPI file	17.1.0
2021-03	CT#91e	CP-210234	0353	1	D	Text style correction	17.1.0
2021-03	CT#91e	CP-210231	0355	1	B	Supported features within ProblemDetails	17.1.0
2021-03	CT#91e	CP-210221	0356	1	B	Supported features within ProblemDetails	17.1.0
2021-03	CT#91e	CP-210234	0359	1	F	Notification URI Correction for AsSessionWithQoS API	17.1.0
2021-03	CT#91e	CP-210207	0361	1	A	Support Redirection for NIDD API	17.1.0
2021-03	CT#91e	CP-210207	0363	1	A	Support Redirection for ChargeableParty API	17.1.0
2021-03	CT#91e	CP-210207	0365	1	A	Support Redirection for CpProvisioning API	17.1.0
2021-03	CT#91e	CP-210207	0367	1	A	Support Redirection for DeviceTriggering API	17.1.0
2021-03	CT#91e	CP-210208	0369	1	A	Support Redirection for AsSessionWithQoS API	17.1.0
2021-03	CT#91e	CP-210208	0371	1	A	Support Redirection for ECRControl API	17.1.0
2021-03	CT#91e	CP-210208	0373	1	A	Support Redirection for MsisdnLessMoSms API	17.1.0
2021-03	CT#91e	CP-210208	0375	1	A	Support Redirection for NpConfiguration API	17.1.0
2021-03	CT#91e	CP-210208	0377	1	A	Support Redirection for PfdManagement API	17.1.0
2021-03	CT#91e	CP-210208	0379	1	A	Support Redirection for RacsParameterProvisioning API	17.1.0
2021-03	CT#91e	CP-210208	0381	1	A	Support Redirection for ResourceManagementOfBdt API	17.1.0
2021-03	CT#91e	CP-210209	0383	1	A	Usage threshold update	17.1.0
2021-03	CT#91e	CP-210248	0385	2	A	Updates to Location Failure Cause	17.1.0
2021-03	CT#91e	CP-210212	0387	1	A	Resource allocation status	17.1.0
2021-03	CT#91e	CP-210240	0389		F	Update of OpenAPI version and TS version in externalDocs field	17.1.0
2021-06	CT#92e	CP-211271	0341	3	B	Updates to AF Application Identifier in ChargeableParty API	17.2.0
2021-06	CT#92e	CP-211271	0342	3	B	Updates to AF Application Identifier in AsSessionWithQoS API	17.2.0
2021-06	CT#92e	CP-211282	0347	5	B	Update DNN and S-NSSAI in ChargeableParty API	17.2.0
2021-06	CT#92e	CP-211282	0348	5	B	Update DNN and S-NSSAI in AsSessionWithQoS API	17.2.0
2021-06	CT#92e	CP-211238	0390	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the CommonData API	17.2.0

2021-06	CT#92e	CP-211238	0392	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the ResourceManagementOfBdt API	17.2.0
2021-06	CT#92e	CP-211238	0393	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the ChargeableParty API	17.2.0
2021-06	CT#92e	CP-211238	0394	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the NIDD API	17.2.0
2021-06	CT#92e	CP-211238	0395	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the DeviceTriggering API	17.2.0
2021-06	CT#92e	CP-211238	0396	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the GMDViaMBMS APIs	17.2.0
2021-06	CT#92e	CP-211238	0397	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the ReportingNetworkStatus API	17.2.0
2021-06	CT#92e	CP-211238	0398	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the CpProvisioning API	17.2.0
2021-06	CT#92e	CP-211238	0399	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the PfdManagement API	17.2.0
2021-06	CT#92e	CP-211238	0400	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the ECRControl API	17.2.0
2021-06	CT#92e	CP-211238	0401	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the NpConfiguration API	17.2.0
2021-06	CT#92e	CP-211238	0402	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the AsSessionWithQoS API	17.2.0
2021-06	CT#92e	CP-211238	0403	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the MsisdnLessMoSms API	17.2.0
2021-06	CT#92e	CP-211238	0404	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the RacParameterProvisioning API	17.2.0
2021-06	CT#92e	CP-211238	0405	1	F	Removal of invalid unbreakable spaces in some attributes description in the GMDViaMBMS and ReportingNetworkStatus APIs	17.2.0
2021-06	CT#92e	CP-211241	0406		F	Support redirection for pure 4G SCEF northbound APIs	17.2.0
2021-06	CT#92e	CP-211241	0407	1	F	MonitoringEvent API: TAB and missing "description" fields	17.2.0
2021-06	CT#92e	CP-211178	0408	3	B	Support Time Sensitive Communication	17.2.0
2021-06	CT#92e	CP-211232	0410	1	A	Clarification on Manufacturer Assigned URC	17.2.0
2021-06	CT#92e	CP-211199	0412	1	A	Correction to LDR geographic area	17.2.0
2021-06	CT#92e	CP-211227	0415		A	Resource corrections for SCEF Northbound APIs	17.2.0
2021-06	CT#92e	CP-211228	0418	1	A	TWAN level accuracy applicability	17.2.0
2021-06	CT#92e	CP-211119	0422	1	F	New Network slice status reporting events for the MonitoringEvent API	17.2.0
2021-06	CT#92e	CP-211241	0426	1	F	Respecting 3GPP Forge executing rules	17.2.0
2021-06	CT#92e	CP-211240	0427	1	B	Support of 204 No content response code for PFDs update(NBI17)	17.2.0
2021-06	CT#92e	CP-211218	0428	1	B	Support of Network Exposure to EAS via Local NEF	17.2.0
2021-06	CT#92e	CP-211239	0429		F	Adding notificationDestination in NpConfigurationPatch data type	17.2.0
2021-06	CT#92e	CP-211240	0430	1	F	Supporting 204 No Content during configuration procedure on NpConfiguration API	17.2.0
2021-06	CT#92e	CP-211240	0431	1	F	204 No Content during modification procedure on MonitoringEvent API	17.2.0
2021-06	CT#92e	CP-211240	0432		F	204 No Content during modification procedure on AsSessionWithQoS API	17.2.0
2021-06	CT#92e	CP-211185	0433		F	204 No Content during modification procedure on ChargeableParty API	17.2.0
2021-06	CT#92e	CP-211240	0434	1	F	Update of notification destination for ResourceManagementOfBdt API	17.2.0
2021-06	CT#92e	CP-211240	0435		F	Update of notification destination for ChargeableParty API	17.2.0
2021-06	CT#92e	CP-211240	0436		F	Update of notification destination for AsSessionWithQoS API	17.2.0
2021-06	CT#92e	CP-211248	0437		B	eCAPIF support	17.2.0
2021-06	CT#92e	CP-211269	0438	1	B	Update procedures to support HSS initiated GEM partial cancellation	17.2.0
2021-06	CT#92e	CP-211269	0439	1	B	Updates to support notification of GEM partial cancellation	17.2.0
2021-06	CT#92e	CP-211240	0440	1	F	Updates 204 No Content in NIDD API	17.2.0
2021-06	CT#92e	CP-211240	0441	1	F	Updates 204 No Content in RacParameterProvisioning API	17.2.0
2021-06	CT#92e	CP-211241	0444	1	B	Updates notification destination via PATCH operation in NIDD API	17.2.0
2021-06	CT#92e	CP-211228	0447	1	A	Format of location information	17.2.0
2021-06	CT#92e	CP-211227	0450		A	Corrections on PATCH operation for ChargeableParty API	17.2.0
2021-06	CT#92e	CP-211227	0453		A	Essential corrections to 204 in PATCH in NIDD API	17.2.0
2021-06	CT#92e	CP-211265	0454		A	Update of OpenAPI version and TS version in externalDocs field	17.2.0
2021-09	CT#93e	CP-212215	0455	1	F	Resource URI corrections for PfdManagement and NpConfiguration APIs	17.3.0
2021-09	CT#93e	CP-212224	0456	1	B	Clarification to type FlowInfo	17.3.0
2021-09	CT#93e	CP-212214	0457		F	Correction to Resource URI of ResourceManagementOfBdt API	17.3.0
2021-09	CT#93e	CP-212210	0458	1	B	UAV Presence Monitoring	17.3.0
2021-09	CT#93e	CP-212215	0459	1	B	Resource allocation status for Chargeable Party	17.3.0
2021-09	CT#93e	CP-212224	0460		F	Fix Appld feature description	17.3.0

2021-09	CT#93e	CP-212215	0463	1	F	Supporting 204 No Content during configuration procedure on DeviceTriggering API	17.3.0
2021-09	CT#93e	CP-212215	0464	1	F	Supporting 204 No Content during configuration procedure on ReportingNetworkStatus API	17.3.0
2021-09	CT#93e	CP-212186	0466	1	A	Accuracy attribute correction	17.3.0
2021-09	CT#93e	CP-212213	0469		A	Correction on Configuration data	17.3.0
2021-09	CT#93e	CP-212204	0471		A	Correction on User Plane Notification data	17.3.0
2021-09	CT#93e	CP-212214	0472		F	Corrections on resource root structure and resource URI on MonitoringEvent API	17.3.0
2021-09	CT#93e	CP-212215	0473	1	F	Rel-17 Resource URI corrections on AsSessionWithQoS API	17.3.0
2021-09	CT#93e	CP-212214	0474		F	Resource URI corrections on ChargeableParty API	17.3.0
2021-09	CT#93e	CP-212214	0475		F	Resource URI correction on DeviceTriggering API	17.3.0
2021-09	CT#93e	CP-212214	0476		F	Resource URI correction on ReportingNetworkStatus API	17.3.0
2021-09	CT#93e	CP-212215	0477	1	F	Add list of data types table to the CommonData API	17.3.0
2021-09	CT#93e	CP-212214	0478		F	Correction of some remaining invalid characters in OpenAPI specification files	17.3.0
2021-09	CT#93e	CP-212214	0479		F	Miscellaneous corrections	17.3.0
2021-09	CT#93e	CP-212215	0480	1	F	Resource URI correction in the GMD via MBMS APIs	17.3.0
2021-09	CT#93e	CP-212214	0481		F	Correction to MAC address in MonitoringEvent API	17.3.0
2021-09	CT#93e	CP-212214	0482		F	Updates 204 No Content in GMDviaMBMSbyMB2 API	17.3.0
2021-09	CT#93e	CP-212214	0483		F	Updates 204 No Content in GMDviaMBMSbyxMB API	17.3.0
2021-09	CT#93e	CP-212214	0484		F	Updates notification destination via PATCH operation in GMDviaMBMSbyMB2 API	17.3.0
2021-09	CT#93e	CP-212214	0485		F	Updates notification destination via PATCH operation in GMDviaMBMSbyxMB API	17.3.0
2021-09	CT#93e	CP-212215	0486	1	F	Correct resource URI in NIDD API	17.3.0
2021-09	CT#93e	CP-212215	0487	1	F	Correct resource URI in RacsParameterProvisioning API	17.3.0
2021-09	CT#93e	CP-212224	0488		B	Update DNN and S-NSSAI in MonitoringEvent API	17.3.0
2021-09	CT#93e	CP-212226	0489	1	B	Update procedures to support SCSAS initiated GEM partial cancellation	17.3.0
2021-09	CT#93e	CP-212237	0490	1	B	Updates to support GEM partial cancellation	17.3.0
2021-09	CT#93e	CP-212187	0491	1	B	Support for Multiple QoS Class in deferred location request	17.3.0
2021-09	CT#93e	CP-212215	0492	2	B	Supporting Load and Overload Control for northbound APIs	17.3.0
2021-09	CT#93e	CP-212211	0494		B	Update of TscQoSRequirement and TscQoSRequirementRm	17.3.0
2021-09	CT#93e	CP-212223	0495		F	Update of OpenAPI version and TS version in externalDocs field	17.3.0
2021-12	CT#94e	CP-213233	0496	2	B	Enhance MonitoringEvent API to support UAV list	17.4.0
2021-12	CT#94e	CP-213247	0497	1	F	Correcting "JSON Patch" encoding of changes	17.4.0
2021-12	CT#94e	CP-213235	0498	1	B	Updates GET Query in AsSessionWithQoS API	17.4.0
2021-12	CT#94e	CP-213235	0499	1	B	Updates GET Query in ChargeableParty API	17.4.0
2021-12	CT#94e	CP-213234	0500	1	B	Adding alternative QoS related parameters to AsSessionWithQoS	17.4.0
2021-12	CT#94e	CP-213260	0502	2	B	Update the data type definition for MonitoringEvent API	17.4.0
2021-12	CT#94e	CP-213235	0503	1	F	Removal of errors from MonitoringEvent OpenAPI file	17.4.0
2021-12	CT#94e	CP-213235	0504		F	ResourceManagementOfBdt: adding summary, operationId and tags fields	17.4.0
2021-12	CT#94e	CP-213235	0505		F	ChargeableParty: adding operationId fields	17.4.0
2021-12	CT#94e	CP-213235	0506	1	F	NIDD: adding summary, operationId and tags fields	17.4.0
2021-12	CT#94e	CP-213235	0507	1	F	DeviceTriggering: adding operationId fields	17.4.0
2021-12	CT#94e	CP-213235	0508		F	GMDviaMBMSbyMB2: adding operationId fields	17.4.0
2021-12	CT#94e	CP-213235	0509		F	GMDviaMBMSbyxMB: adding operationId fields	17.4.0
2021-12	CT#94e	CP-213235	0510		F	ReportingNetworkStatus: adding operationId and tags fields	17.4.0
2021-12	CT#94e	CP-213235	0511	1	F	CpProvisioning: adding summary, operationId and tags fields	17.4.0
2021-12	CT#94e	CP-213235	0512		F	PfdManagement: adding summary, operationId and tags fields	17.4.0
2021-12	CT#94e	CP-213235	0513		F	NpConfiguration: adding operationId fields	17.4.0
2021-12	CT#94e	CP-213235	0514		F	AsSessionWithQoS: adding operationId fields	17.4.0
2021-12	CT#94e	CP-213235	0515	1	F	MsisdnLessMoSms: adding summary, operationId and tags fields	17.4.0
2021-12	CT#94e	CP-213235	0516		F	RacsParameterProvisioning: adding summary, operationId and tags fields	17.4.0
2021-12	CT#94e	CP-213247	0517	1	B	Update error handling procedures for GEM partial cancellation	17.4.0
2021-12	CT#94e	CP-213212	0518	1	F	Resolve editor note for Multiple QoS Class	17.4.0
2021-12	CT#94e	CP-213230	0519		F	Resolving the subscription to NSAC events related ENs	17.4.0
2021-12	CT#94e	CP-213230	0520	1	F	Resolving the reporting type related ENs for NSAC event subscriptions	17.4.0
2021-12	CT#94e	CP-213268	0521	2	B	Supporting explicit subscription to user plane events for the AsSessionWithQoS API	17.4.0
2021-12	CT#94e	CP-213235	0522	1	B	Updating the support of explicit subscription to bearer events for the ChargeableParty API	17.4.0
2021-12	CT#94e	CP-213235	0523	1	F	Supporting 204 No Content during configuration procedure on ResourceManagementOfBdt API	17.4.0
2021-12	CT#94e	CP-213236	0524		F	Correction to Resource URI of CpProvisioning API	17.4.0
2021-12	CT#94e	CP-213236	0525	1	B	Support of 204 No Content during modification procedure on CpProvisioning API	17.4.0
2021-12	CT#94e	CP-213220	0526		B	Alignment with SA3 supported TLS profiles	17.4.0

2021-12	CT#94e	CP-213223	0527		B	Clarification of direct notification	17.4.0
2021-12	CT#94e	CP-213230	0528	1	B	Supporting network slice status retrieval	17.4.0
2021-12	CT#94e	CP-213236	0532	1	B	Updates GET Query in MonitoringEvent API	17.4.0
2021-12	CT#94e	CP-213236	0533	1	F	Adding a list of APIs table	17.4.0
2021-12	CT#94e	CP-213267	0534	2	B	Supporting multiple events per subscription on MonitoringEvent API	17.4.0
2021-12	CT#94e	CP-213236	0536	1	F	Adding the MonitoringEvent API specific data types tables	17.4.0
2021-12	CT#94e	CP-213236	0537	1	F	Adding the DeviceTriggering API specific data types tables	17.4.0
2021-12	CT#94e	CP-213236	0538	1	F	Adding the ReportingNetworkStatus API specific data types tables	17.4.0
2021-12	CT#94e	CP-213236	0539	1	F	Adding the ECRControl API specific data types tables	17.4.0
2021-12	CT#94e	CP-213236	0540	1	F	Adding the NpConfiguration API specific data types tables	17.4.0
2021-12	CT#94e	CP-213246	0541	1	F	Update of OpenAPI version and TS version in externalDocs field	17.4.0
2022-03	CT#95e	CP-220203	0542		F	Correction of mbmsLocArea attribute for GMDViaMBMS APIs	17.5.0
2022-03	CT#95e	CP-220203	0543		F	Adding the ChargeableParty API specific data types table	17.5.0
2022-03	CT#95e	CP-220203	0544		F	Adding the PfdManagement API specific data types table	17.5.0
2022-03	CT#95e	CP-220203	0545	1	F	Adding the ResourceManagementOfBdt API specific data types table	17.5.0
2022-03	CT#95e	CP-220203	0546	1	F	Updating the AsSessionWithQoS API data types table	17.5.0
2022-03	CT#95e	CP-220204	0547	2	B	Add the support for PATCH method for the update of a NIDD DL Data transfer resource	17.5.0
2022-03	CT#95e	CP-220204	0548	3	B	Add the support of PATCH for the update of a Device Triggering Transaction resource	17.5.0
2022-03	CT#95e	CP-220203	0549	1	F	Adding the NIDD API specific data types table	17.5.0
2022-03	CT#95e	CP-220203	0550		F	Adding the GMDViaMBMS APIs specific data types tables	17.5.0
2022-03	CT#95e	CP-220203	0551		F	Adding the CpProvisioning API specific data types table	17.5.0
2022-03	CT#95e	CP-220203	0552		F	Adding the MsisdnLessMoSms API specific data types table	17.5.0
2022-03	CT#95e	CP-220203	0553		F	Adding the RacsParameterProvisioning API specific data types table	17.5.0
2022-03	CT#95e	CP-220181	0554	1	B	Add the support of the civic address type of accuracy	17.5.0
2022-03	CT#95e	CP-220187	0555	1	B	Defining the reporting format for NSAC	17.5.0
2022-03	CT#95e	CP-220203	0556	1	B	Description of JSON body with "JSON Patch" encoding of changes	17.5.0
2022-03	CT#95e	CP-220203	0557		F	Updates to GET query supporting in collection level	17.5.0
2022-03	CT#95e	CP-220203	0558		B	Updates GET query in PfdManagement API	17.5.0
2022-03	CT#95e	CP-220183	0559	1	B	Adding alternative QoS related parameter sets to AsSessionWithQoS	17.5.0
2022-03	CT#95e	CP-220203	0560		F	Correction of the encoding of complex query parameters	17.5.0
2022-03	CT#95e	CP-220199	0561	1	B	Support GEM partial addition	17.5.0
2022-03	CT#95e	CP-220185	0562		F	Feature support handling for Edge Computing	17.5.0
2022-03	CT#95e	CP-220187	0564	1	F	One-time reporting	17.5.0
2022-03	CT#95e	CP-220169	0567		A	Incorrect resource name and attribute name	17.5.0
2022-03	CT#95e	CP-220181	0568	1	B	Support AF specific UE ID retrieval in MonitoringEvent API	17.5.0
2022-03	CT#95e	CP-220181	0569	1	B	Support AF specific UE ID retrieval in CpProvisioning API	17.5.0
2022-03	CT#95e	CP-220181	0570	1	B	Support AF specific UE ID retrieval in NpConfiguration API	17.5.0
2022-03	CT#95e	CP-220204	0571	1	B	Support PATCH for the update of a PFD Management Transaction resource	17.5.0
2022-03	CT#95e	CP-220204	0572	1	B	Support PATCH for the update of Network Status Reporting Subscription resource	17.5.0
2022-03	CT#95e	CP-220194	0573		F	Update of info and externalDocs fields	17.5.0
2022-06	CT#96	CP-221145	0575	1	B	Mutual exclusivity of QoS reference and individual QoS parameters	17.6.0
2022-06	CT#96	CP-221139	0576	1	F	Corrections to the AF provided inputs for NSAC	17.6.0
2022-06	CT#96	CP-221147	0577	1	F	Aligning the naming conventions for resource URI components and enumerations with 5GC APIs	17.6.0
2022-06	CT#96	CP-221147	0578	1	F	Resolving the naming convention issues	17.6.0
2022-06	CT#96	CP-221144	0580	1	F	Support of QoS notification control for requested alternative QoS parameters	17.6.0
2022-06	CT#96	CP-221159	0581		F	Adding Link data type with "nullable: true" property	17.6.0
2022-06	CT#96	CP-221159	0583		B	Missing application errors in the Monitoring API	17.6.0
2022-06	CT#96	CP-221159	0584		F	Correction to TscQosRequirement and TscQosRequirementRm	17.6.0
2022-06	CT#96	CP-221159	0585		B	Supporting user consent revocation for EDGEAPP on the Nnef_EventExposure API	17.6.0
2022-06	CT#96	CP-221159	0588		A	Correcting the DateTime data type name	17.6.0
2022-06	CT#96	CP-221159	0589		F	Removing the MonitoringEventSubscriptionPatch data type	17.6.0
2022-06	CT#96	CP-221159	0590		F	Defining the default logical relationship between query parameters	17.6.0
2022-06	CT#96	CP-221159	0591		F	Update of info and externalDocs fields	17.6.0
2022-09	CT#97e	CP-222097	0592	1	F	Updates error handling for AF specific UE Id retrieval in MonitoringEvent API	17.7.0
2022-09	CT#97e	CP-222097	0593	1	F	Updates error handling for AF specific UE Id retrieval in CpProvisioning API	17.7.0
2022-09	CT#97e	CP-222097	0594	1	F	Updates error handling for AF specific UE Id retrieval in NpConfiguration API	17.7.0
2022-09	CT#97e	CP-222118	0595	1	F	The events subscribed by the NEF	17.7.0
2022-09	CT#97e	CP-222113	0596	-	F	Fixing TSC related reused data types in AsSessionWithQoS	17.7.0

2022-09	CT#97e	CP-222118	0597	1	F	Application errors handling for the NpConfiguration API	17.7.0
2022-09	CT#97e	CP-222117	0598	-	F	Application errors handling for the RacsParameterProvisioning API	17.7.0
2022-09	CT#97e	CP-222117	0599	1	F	Usage of the "tags" field and URI structure	17.7.0
2022-09	CT#97e	CP-222117	0600	-	F	Application errors handling for the NIDD API	17.7.0
2022-09	CT#97e	CP-222117	0601	1	F	Application errors handling for the ReportingNetworkStatus API	17.7.0
2022-09	CT#97e	CP-222117	0602	-	F	Application errors handling for the ECRControl API	17.7.0
2022-09	CT#97e	CP-222117	0603	1	F	"Error handling" clause: alignment with other NBI and 5GS APIs	17.7.0
2022-09	CT#97e	CP-222125	0605	1	F	Correction of User Plane Event Report	17.7.0
2022-09	CT#97e	CP-222125	0607	1	F	Reporting condition for QoS Monitoring Information	17.7.0
2022-09	CT#97e	CP-222090	0609	1	A	Corrections on location reporting	17.7.0
2022-09	CT#97e	CP-222117	0612	1	F	Boolean types in partial modification	17.7.0
2022-09	CT#97e	CP-222117	0613	1	F	Updates on PATCH in MonitoringEvent API	17.7.0
2022-09	CT#97e	CP-222118	0614	1	F	Missing description field for enumeration data type in MonitoringEvent API	17.7.0
2022-09	CT#97e	CP-222097	0615	-	F	Correcting the name of the application errors related to user consent revocation support	17.7.0
2022-09	CT#97e	CP-222117	0616	-	F	Application errors handling for the MontoringEvent API	17.7.0
2022-09	CT#97e	CP-222121	0620	-	F	Update of info and externalDocs fields	17.7.0
2022-12	CT#98e	CP-223184	0623	1	F	Corrections on PLMN_CHG event	17.8.0
2022-12	CT#98e	CP-223184	0624	1	F	Corrections on ACCESS_TYPE_CHANGE event	17.8.0
2022-12	CT#98e	CP-223188	0626	-	F	Update of info and externalDocs fields	17.8.0
2022-12	CT#98e	CP-223185	0622	1	F	ResultReason enumeration definition in the OpenAPI file	18.0.0
2022-12	CT#98e	CP-223189	0625	-	F	Update of info and externalDocs fields	18.0.0
2023-03	CT#99	CP-230179	0628	1	B	Adding PER to AF Session with QoS API	18.1.0
2023-03	CT#99	CP-230172	0629	1	B	Unavailability Period feature for Monitoring Event API	18.1.0
2023-03	CT#99	CP-230157	0632	1	B	Correction of expectedUmtDays attribute	18.1.0
2023-03	CT#99	CP-230156	0634	1	B	Update Flow Description Information with ToSTC in ChargeableParty API	18.1.0
2023-03	CT#99	CP-230156	0636	1	B	Update Flow Description Information with ToSTC in AsSessionWithQoS API	18.1.0
2023-03	CT#99	CP-230157	0640	2	B	Updates on location reporting	18.1.0
2023-03	CT#99	CP-230281	0641	2	B	Updates to immediate reporting in MonitoringEvent API	18.1.0
2023-03	CT#99	CP-230156	0642	1	F	Correction of the description fields in enumerations	18.1.0
2023-03	CT#99	CP-230156	0643	-	F	Description fields in enumerations	18.1.0
2023-03	CT#99	CP-230173	0650	1	A	Correction on handling of Packet Delay Failure report Threshold	18.1.0
2023-03	CT#99	CP-230174	0651	-	F	Generalization of QoS monitoring control description	18.1.0
2023-03	CT#99	CP-230182	0652	1	B	Support of Nnef_AFsessionWithQoS_Create service update for Multi-Modal service XR and Media Services	18.1.0
2023-03	CT#99	CP-230157	0653	1	B	Vendor specific extensions	18.1.0
2023-03	CT#99	CP-230155	0655	1	A	Corrections in MonitoringEvent API	18.1.0
2023-03	CT#99	CP-230277	0656	1	B	Specification of application errors for QoS requests	18.1.0
2023-03	CT#99	CP-230175	0657	1	B	Indication of Alternative Service Requirements not supported	18.1.0
2023-03	CT#99	CP-230179	0658	1	B	Support of BAT window and capability for BAT adaptation	18.1.0
2023-03	CT#99	CP-230153	0659	-	B	Support of Group Member List Change event	18.1.0
2023-03	CT#99	CP-230157	0660	1	F	Clarification on bearer related events in AsSessionWithQoS API	18.1.0
2023-03	CT#99	CP-230305	0662	2	A	Correction of the procedure when the NEF reject the AF update request	18.1.0
2023-03	CT#99	CP-230161	0664	-	F	Update of info and externalDocs fields	18.1.0
2023-06	CT#100	CP-231169	0639	2	A	Correction on TLS_SCN in PFD data	18.2.0
2023-06	CT#100	CP-231139	0665	1	F	Corrections on applicability of ToS Traffic Class	18.2.0
2023-06	CT#100	CP-231130	0666	2	B	AsSessionWithQoS enhancements to support multi-modal services	18.2.0
2023-06	CT#100	CP-231139	0669	1	B	Vendor specific extensions – resolve EN	18.2.0
2023-06	CT#100	CP-231130	0671	2	B	Support of ECN marking for L4S	18.2.0
2023-06	CT#100	CP-231139	0672	1	F	Defining a TS skeleton for TSs documenting NBI APIs	18.2.0
2023-06	CT#100	CP-231143	0675	1	F	Support of BAT offset and adjusted periodicity	18.2.0
2023-06	CT#100	CP-231300	0677	2	B	Support of PDU Set QoS Parameters	18.2.0
2023-06	CT#100	CP-231129	0678	3	B	Support of Uplink Downlink transmission coordination to meet RT latency requirement	18.2.0
2023-06	CT#100	CP-231139	0680	1	B	Updates in NpConfiguration API	18.2.0
2023-06	CT#100	CP-231186	0681		F	Clarification on Loss_of_connectivity_notification_5G	18.2.0
2023-06	CT#100	CP-231126	0682	1	B	Enhanced data management for the Monitoring API	18.2.0
2023-06	CT#100	CP-231164	0686	1	A	Corrections in the Notification mechanism description	18.2.0
2023-06	CT#100	CP-231153	0688	1	A	MonitoringEvent resources update for an Error case	18.2.0
2023-06	CT#100	CP-231262	0689	2	B	Adding Monitoring event for application traffic detection.	18.2.0
2023-06	CT#100	CP-231130	0690	1	B	Protocol description parameter support in AS Session with QoS	18.2.0
2023-06	CT#100	CP-231147	0694		A	Removal of unspecified QoS monitoring control options	18.2.0
2023-06	CT#100	CP-231129	0696		B	Support of periodicity measurement and reporting for power saving	18.2.0
2023-06	CT#100	CP-231128	0697		B	Support Application-Specific Expected UE Behaviour parameters	18.2.0
2023-06	CT#100	CP-231311	0699	2	A	Corrections to boolean type in MonitoringEventSubscription	18.2.0
2023-06	CT#100	CP-231140	0700	1	F	Corrections to immediate reporting in MonitoringEvent API	18.2.0
2023-06	CT#100	CP-231140	0701	1	F	Corrections to Location Type and immediate reporting in MonitoringEvent API	18.2.0

2023-06	CT#100	CP-231313	0702	2	B	Updates to BDT on ASP Id	18.2.0
2023-06	CT#100	CP-231167	0705		A	Reporting format for one-time reporting	18.2.0
2023-06	CT#100	CP-231130	0707	1	B	Support of Packet Delay Variation monitoring and reporting	18.2.0
2023-06	CT#100	CP-231139	0711		F	Corrections to the resource update related provisions for the MonitoringEvent API	18.2.0
2023-06	CT#100	CP-231139	0712		B	Editor Note removal for userLocation attribute	18.2.0
2023-06	CT#100	CP-231141	0715		F	Update of info and externalDocs fields	18.2.0
2023-09	CT#101	CP-232091	0721	1	F	Wrong applicability of AsSessionWithQoS error	18.3.0
2023-09	CT#101	CP-232086	0722	1	F	Applicability of new AfSessionWithQoS errors	18.3.0
2023-09	CT#101	CP-232124	0723	1	B	Update application detection event exposure	18.3.0
2023-09	CT#101	CP-232087	0724	1	B	AF QoS Timing info addition	18.3.0
2023-09	CT#101	CP-232172	0725	2	B	AIMLsys service data model update for ASessionWithQoS	18.3.0
2023-09	CT#101	CP-232158	0727	1	F	Editor note removal for Multimodal id	18.3.0
2023-09	CT#101	CP-232090	0729		B	AF request QoS for target UE in AsSessionWithQoS API	18.3.0
2023-09	CT#101	CP-232109	0731	1	B	Reject Location request when area does not overlap with configured "event report allowed area"	18.3.0
2023-09	CT#101	CP-232113	0732	1	B	Network slice admission control notification update for UE with at least one PDU session/PDN connection	18.3.0
2023-09	CT#101	CP-232086	0735		F	Correction in Feature numbering	18.3.0
2023-09	CT#101	CP-232086	0736		F	remove useless BdtReferenceldRm	18.3.0
2023-09	CT#101	CP-232091	0738		F	Corrections on the roaming status report	18.3.0
2023-09	CT#101	CP-232084	0739	1	B	Subscription to Round-Trip delay over two service data flows	18.3.0
2023-09	CT#101	CP-232158	0740	1	B	Subscription to data rate monitoring	18.3.0
2023-09	CT#101	CP-232158	0741	1	B	Support of the congestion information measurement and reporting	18.3.0
2023-09	CT#101	CP-232158	0742	1	B	Support of the Packet Delay Variation monitoring	18.3.0
2023-09	CT#101	CP-232087	0745	1	B	Confidence and accuracy levels for UE behaviour parameters	18.3.0
2023-09	CT#101	CP-232103	0746	2	B	Location exposure for Ranging_SL	18.3.0
2023-09	CT#101	CP-232087	0747	1	B	Resolve EN for Application-Specific Expected UE Behaviour parameters	18.3.0
2023-09	CT#101	CP-232085	0748		F	Update of info and externalDocs fields	18.3.0
2023-12	CT#102	CP-233231	0691	4	B	Supporting query parameters extensibility	18.4.0
2023-12	CT#102	CP-233263	0718	1	A	Resolving the remaining LOLC related ENs	18.4.0
2023-12	CT#102	CP-233262	0719	2	B	Support of user plane positioning	18.4.0
2023-12	CT#102	CP-233231	0734	3	F	Corrections to MonitoringEventReport	18.4.0
2023-12	CT#102	CP-233235	0749		F	Correct the attribute names and add abbreviation	18.4.0
2023-12	CT#102	CP-233233	0750	1	B	Introduction of new features for PDU set handle and RT latency	18.4.0
2023-12	CT#102	CP-233233	0752		B	Update Data Rate monitoring	18.4.0
2023-12	CT#102	CP-233231	0753		F	Corrections to the monitoringType and addnMonTypes attributes	18.4.0
2023-12	CT#102	CP-233231	0754	1	F	Corrections to the User Consent Revocation Notification definition	18.4.0
2023-12	CT#102	CP-233234	0755	3	B	Support of subscription to flow level events	18.4.0
2023-12	CT#102	CP-233233	0756	1	F	Support of the new feature name EnQoSMon	18.4.0
2023-12	CT#102	CP-233231	0757	2	F	Updating the obsoleted IETF HTTP RFCs	18.4.0
2023-12	CT#102	CP-233235	0760	1	F	associate attributes with corresponding NOTE	18.4.0
2023-12	CT#102	CP-233231	0761		B	ProblemDetails RFC 7807 obsoleted by RFC 9457	18.4.0
2023-12	CT#102	CP-233268	0762	1	B	Update Location exposure for Ranging_SL	18.4.0
2023-12	CT#102	CP-233257	0763	1	F	Corrections in MonitoringEventReport	18.4.0
2023-12	CT#102	CP-233233	0764		B	Protocol description - End of burst indication update	18.4.0
2023-12	CT#102	CP-233208	0765	2	B	Feature granularity and definition for MultiModal & PowerSaving	18.4.0
2023-12	CT#102	CP-233245	0766	1	F	Correction on formulating conditions based on feature support	18.4.0
2023-12	CT#102	CP-233233	0771		B	Definition of L4S feature	18.4.0
2023-12	CT#102	CP-233236	0772	3	B	Updates to AppExpUeBehaviour Data Type in CpProvisioning API	18.4.0
2023-12	CT#102	CP-233235	0774		F	Update the feature description for Application-Specific Expected UE Behaviour	18.4.0
2023-12	CT#102	CP-233257	0775	1	B	Update application detection event exposure	18.4.0
2023-12	CT#102	CP-233262	0776	1	B	Support of cumulative event report	18.4.0
2023-12	CT#102	CP-233235	0777		F	Remove the redundant features	18.4.0
2023-12	CT#102	CP-233235	0778	1	B	Support of Consolidated Data Rate for Multi-member AF session	18.4.0
2023-12	CT#102	CP-233209	0780	2	B	Port handling with AsSessionWithQoS	18.4.0
2023-12	CT#102	CP-233236	0781	1	B	Multiple AF Expected UE behaviour	18.4.0
2023-12	CT#102	CP-233225	0782		F	Removal of EN related to data management	18.4.0
2023-12	CT#102	CP-233257	0783	1	F	Wrong attribute name	18.4.0
2023-12	CT#102	CP-233231	0784		F	Corrections on monitoring event	18.4.0
2023-12	CT#102	CP-233234	0785		F	Remove the multiModalId in the update message and update the terminology	18.4.0
2023-12	CT#102	CP-233237	0787		F	Update of info and externalDocs fields	18.4.0
2024-03	CT#103	CP-240158	0770	5	B	QoS monitoring alignment with SA2	18.5.0
2024-03	CT#103	CP-240158	0788	1	F	Clarification of feature dependency on QoSMonitoring_5G for EnQoSMon	18.5.0
2024-03	CT#103	CP-240158	0789	1	F	Resolve the Editor's Notes for QoS monitoring for congestion	18.5.0
2024-03	CT#103	CP-240158	0792	1	B	Completion of PDU Set handling functionality	18.5.0
2024-03	CT#103	CP-240158	0793	1	B	Interactions between ECN marking for L4S and Congestion Monitoring	18.5.0

2024-03	CT#103	CP-240160	0790	3	B	Protocol description update	18.5.0
2024-03	CT#103	CP-240159	0791	3	F	Resolve the Editor's Notes for QoS monitoring for PDV	18.5.0
2024-03	CT#103	CP-240185	0794	1	F	Updates on application detection event exposure	18.5.0
2024-03	CT#103	CP-240203	0795	1	F	Limit the number of IP addresses of LCS client or AF	18.5.0
2024-03	CT#103	CP-240160	0796	1	F	Removal of XRM_5G feature	18.5.0
2024-03	CT#103	CP-240160	0797	1	F	Correction of QosMonitoringInformation	18.5.0
2024-03	CT#103	CP-240174	0798	2	B	Flow description handling for list of UE	18.5.0
2024-03	CT#103	CP-240174	0799	2	B	Transport protocol editor note removal	18.5.0
2024-03	CT#103	CP-240171	0801	1	F	Corrections on cardinality issue	18.5.0
2024-03	CT#103	CP-240176	0804	1	B	Various updates and corrections	18.5.0
2024-03	CT#103	CP-240171	0805		F	Various corrections	18.5.0
2024-03	CT#103	CP-240179	0806	1	F	Various corrections and alignments	18.5.0
2024-03	CT#103	CP-240159	0807		F	Editor's note removal for multi-modal communication services	18.5.0
2024-03	CT#103	CP-240160	0808	1	F	Editor's note removal and flow level subscription updates	18.5.0
2024-03	CT#103	CP-240170	0811	1	A	Corrections on QoS monitoring reports	18.5.0
2024-03	CT#103	CP-240185	0812	1	B	Updates on application detection event exposure	18.5.0
2024-03	CT#103	CP-240160	0813	1	B	Support of the measurement of Round-Trip delay over two QoS flows	18.5.0
2024-03	CT#103	CP-240159	0814	1	B	Support the provisioning of periodicity information at service data flow level	18.5.0
2024-03	CT#103	CP-240166	0816		F	Update of info and externalDocs fields	18.5.0
2024-06	CT#104	CP-241080	0819	1	F	Power savings feature editors note handling	18.6.0
2024-06	CT#104	CP-241091	0821	1	B	Application Specific Expected UE Behaviour parameters update	18.6.0
2024-06	CT#104	CP-241107	0822	1	F	Miscellaneous changes	18.6.0
2024-06	CT#104	CP-241083	0823		F	Several OpenAPI Corrections	18.6.0
2024-06	CT#104	CP-241080	0824	1	F	Correction on notifCorreld	18.6.0
2024-06	CT#104	CP-241080	0825	1	F	missing applicable EnQoSMon feature for repPeriod and pdmf attributes	18.6.0
2024-06	CT#104	CP-241080	0827	1	F	Clarification for altSerReqs and altSerReqsData attributes	18.6.0
2024-06	CT#104	CP-241080	0828	1	F	Clarification for the presence conditions of QM parameters and Removal of the EN for QM report	18.6.0
2024-06	CT#104	CP-241080	0830	1	F	Update of XRM_5G feature name for TSC Traffic	18.6.0
2024-06	CT#104	CP-241095	0831		F	Clarifications for PFD management service operations	18.6.0
2024-06	CT#104	CP-241080	0832	1	B	Completion of Round Trip Time over two QoS flows	18.6.0
2024-06	CT#104	CP-241103	0833	1	F	Various GMEC related corrections	18.6.0
2024-06	CT#104	CP-241081	0835	2	F	Update of removable data types and solution of QoS monitoring remaining ENs	18.6.0
2024-06	CT#104	CP-241091	0836	2	B	NEF monitoring events to assist application AIML operation	18.6.0
2024-06	CT#104	CP-241081	0837		F	Multimodal data flow QoS parameters editors note removal	18.6.0
2024-06	CT#104	CP-241081	0838		F	altSerReqs and altSerReqsData attributes openAPI update	18.6.0
2024-06	CT#104	CP-241095	0839	1	F	UAV related clarifications.	18.6.0
2024-06	CT#104	CP-241081	0840	1	F	Corrections to QosMonitoringInformation data type	18.6.0
2024-06	CT#104	CP-241081	0841	1	F	Completion of EnQoSMon feature description in 5.8	18.6.0
2024-06	CT#104	CP-241081	0842	1	F	Remove default boolean value for attributes in modification request	18.6.0
2024-06	CT#104	CP-241081	0843	1	F	Completion of re-used data types table	18.6.0
2024-06	CT#104	CP-241092	0844	1	F	Missing applicable feature ListUE_5G for QoS monitoring	18.6.0
2024-06	CT#104	CP-241084	0845	1	F	Various essential corrections	18.6.0
2024-06	CT#104	CP-241127	0846	1	F	Corrections to the provisions related to the application detection functionality	18.6.0
2024-06	CT#104	CP-241107	0847		F	Alignment with naming convention	18.6.0
2024-06	CT#104	CP-241082	0848	1	F	Correction to Individual QoS parameters	18.6.0
2024-06	CT#104	CP-241082	0849	1	F	Data rate and congestion report	18.6.0
2024-06	CT#104	CP-241082	0850	1	F	Corrections on the feature name and data types	18.6.0
2024-06	CT#104	CP-241082	0851	1	B	Support of UL and DL policy control based on Round-Trip latency requirements	18.6.0
2024-06	CT#104	CP-241085	0852		F	Update of info and externalDocs fields	18.6.0
2024-09	CT#105	CP-242125	0857	1	F	Corrections on Consolidated Data Rate monitoring	18.7.0
2024-09	CT#105	CP-242146	0858	1	F	GMEC applicability update	18.7.0
2024-09	CT#105	CP-242122	0861	1	F	QoS monitoring report update	18.7.0
2024-09	CT#105	CP-242125	0863	1	F	Correction of data model for Consolidated Data Rate monitoring	18.7.0
2024-09	CT#105	CP-242140	0868		F	Correction to additional QoS information error report	18.7.0
2024-09	CT#105	CP-242122	0869	1	F	Correction to the subscription to L4S availability	18.7.0
2024-09	CT#105	CP-242163	0870	1	F	Corrections on the feature name	18.7.0
2024-09	CT#105	CP-242122	0871	1	F	Corrections on the attribute name and remove the Editor's Note	18.7.0



---

# History

<b>Document history</b>		
V18.5.0	May 2024	Publication
V18.6.0	July 2024	Publication
V18.7.0	September 2024	Publication