

ETSI TS 136 424 V15.0.0 (2018-09)



**LTE;
Evolved Universal Terrestrial
Radio Access Network (E-UTRAN);
X2 data transport
(3GPP TS 36.424 version 15.0.0 Release 15)**



Reference

RTS/TSGR-0336424vf00

Keywords

LTE

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2018.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

| | |
|--|----------|
| Intellectual Property Rights | 2 |
| Foreword..... | 2 |
| Modal verbs terminology..... | 2 |
| Foreword..... | 4 |
| 1 Scope | 5 |
| 2 References | 5 |
| 3 Definitions, symbols and abbreviations | 5 |
| 3.1 Definitions | 5 |
| 3.2 Abbreviations | 6 |
| 4 Data link layer | 6 |
| 5 X2 interface user plane protocol | 6 |
| 5.1 General | 6 |
| 5.2 GTP-U | 7 |
| 5.3 UDP/IP | 7 |
| 5.4 Diffserv code point marking..... | 7 |
| 5.5 Dual Connectivity..... | 7 |
| 5.6 E-UTRA-NR Dual Connectivity | 8 |
| Annex A (informative): Change history | 9 |
| History | 10 |

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies the standards for user data transport protocols and related signalling protocols to establish user plane transport bearers over the X2 interface.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 29.281: "General Packet Radio System (GPRS) Tunnelling Protocol User Plane (GTPv1-U)".
- [3] IETF RFC 768 (1980-08): "User Datagram Protocol".
- [4] IETF RFC 2474 (1998-12): "Definition of the Differentiated Services Field (DS Field) in the Ipv4 and Ipv6 Headers".
- [5] IETF RFC 2460 (1998-12): "Internet Protocol, Version 6 (IPv6) Specification".
- [6] IETF RFC 791 (1981-09): "Internet Protocol".
- [7] 3GPP TS 36.401: "Evolved Universal Terrestrial Radio Access Network (E-UTRAN); Architecture Description".
- [8] 3GPP TS 36.300: "Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access Network (E-UTRAN); Overall description; Stage 2".
- [9] 3GPP TS 36.425: "Evolved Universal Terrestrial Radio Access Network (E-UTRAN); X2 interface user plane protocol".
- [10] 3GPP TS 37.340: "NR; Multi-connectivity; Overall description; Stage-2".
- [11] 3GPP TS 38.425; "NG-RAN; NR user plane protocol".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions below apply. Terms and definitions not defined below can be found in TR 21.905 [1].

Corresponding E-UTRAN node: Used in this specification according to the definition of the corresponding node in TS 38.425 [11].

Dual Connectivity: Defined in TS 36.300 [8].

EN-DC: Defined in TS 37.340 [10].

E-RAB: Defined in TS 36.401 [7].

X2: logical interface between two eNBs. Whilst logically representing a point to point link between eNBs, the physical realisation need not be a point to point link.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

| | |
|---------|----------------------------------|
| DC | Dual Connectivity |
| eNB | E-UTRAN Node B |
| EN-DC | E-UTRA-NR Dual Connectivity |
| E-RAB | E-UTRAN Radio Access Bearer |
| E-UTRAN | Evolved UTRAN |
| GTP | GPRS Tunnelling Protocol |
| IP | Internet Protocol |
| MeNB | Master eNB |
| PDCP | Packet Data Convergence Protocol |
| PDU | Protocol Data Unit |
| SCG | Secondary Cell Group |
| SeNB | Secondary eNB |
| TEID | Tunnel Endpoint Identifier |
| UDP | User Datagram Protocol |

4 Data link layer

Any data link protocol that fulfils the requirements toward the upper layer may be used.

5 X2 interface user plane protocol

5.1 General

The transport layer for data streams over X2 is an IP based Transport. The following figure shows the transport protocol stacks over X2.

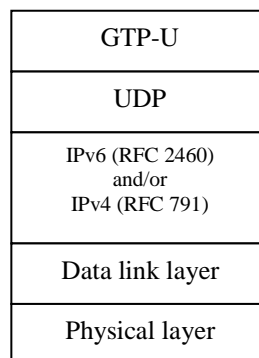


Figure 5.1: Transport network layer for data streams over X2

The GTP-U (TS 29.281 [2]) protocol over UDP over IP shall be supported as the transport for data streams on the X2 interface. The data link layer is as specified in clause 4.

There may be zero or one UL data stream and zero or one DL data stream per E-RAB at the X2 interface.

- The DL data stream is used for DL data forwarding from the source eNB to the target eNB.
- The UL data stream is used for UL data forwarding from the source eNB to the target eNB.

Each data stream is carried on a dedicated transport bearer.

The identity of a transport bearer signalled in the RNL control plane consists of the IP address and the TEID of the corresponding GTP tunnel, allocated by the target eNB (see TS 29.281 [2]).

5.2 GTP-U

The GTP-U (TS 29.281 [2]) protocol shall be used over the X2 interface between two eNBs.

5.3 UDP/IP

The path protocol used shall be UDP (IETF RFC 768 [3]).

The UDP port number for GTP-U shall be as defined in TS 29.281 [2].

The eNBs over the X2 interface shall support fragmentation and assembly of GTP packets at the IP layer.

The eNB shall support IPv6 (IETF RFC 2460 [5]) and/or IPv4 (IETF RFC 791 [6]).

There may be one or several IP addresses in the both eNBs. The packet processing function in the source eNB shall send downstream packets of a given E-RAB to the target eNB IP address (received in X2AP) associated to the DL transport bearer of that particular E-RAB. The packet processing function in the source eNB shall send upstream packets of a given E-RAB to the target eNB IP address (received in X2AP) associated to the UL transport bearer of that particular E-RAB.

The Transport Layer Address signalled in X2AP messages is a bit string of either

- a) 32 bits in case of IPv4 address according to IETF RFC 791 [6]; or
- b) 128 bits in case of IPv6 address according to IETF RFC 2460 [5].

5.4 Diffserv code point marking

IP Differentiated Services code point marking (IETF RFC 2474 [4]) shall be supported. The mapping between traffic categories and Diffserv code points shall be configurable by O&M based on QoS Class Identifier (QCI)/ Label Characteristics and other E-UTRAN traffic parameters (e.g. ARP). Traffic categories are implementation-specific and may be determined from the application parameters.

5.5 Dual Connectivity

For the SCG bearer option, user data forwarding may be performed. The behaviour of the eNB from which user data is forwarded is the same as specified for the “source eNB”, the behaviour of the eNB to which user data is forwarded is the same as specified for the “target eNB”.

For the split bearer option:

- the GTP-U (TS 29.281 [2]) protocol over UDP over IP shall be supported as the transport for the data stream of PDCP PDUs on the X2 interface. The GTP-U PDU may include a RAN Container with flow control information as specified in TS 36.425 [9] which is carried in the GTP-U extension header. The transport bearer is identified by the GTP-U TEID (TS 29.281 [2]) and the IP address of the MeNB and SeNB respectively. There may be zero or one UL data stream and there is one DL data stream per E-RAB at the X2 interface;
 - The DL data stream is used for DL data transmission from the MeNB to the SeNB;
 - The UL data stream is used for UL data transmission from the SeNB to the MeNB;
- the packet processing function in the MeNB shall send downstream packets of a given E-RAB to the SeNB IP address (received in X2AP) associated to the DL transport bearer of that particular E-RAB. The packet processing function in the SeNB shall send upstream packets of a given E-RAB to the MeNB IP address (received in X2AP) associated to the UL transport bearer of that particular E-RAB;
- data forwarding may be performed by MeNB providing GTP-U TEID to receive the DL data forwarded by the SeNB.

5.6 E-UTRA-NR Dual Connectivity

User data forwarding may be performed for each E-RAB configured for EN-DC, towards or from the node hosting the PDCP entity. The behaviour of the E-UTRAN node from which user data is forwarded is the same as specified for the "source eNB", the behaviour of the E-UTRAN node to which user data is forwarded is the same as specified for the "target eNB".

If X2-U data bearer resources are allocated for EN-DC:

- the GTP-U (TS 29.281 [2]) protocol over UDP over IP shall be supported as the transport for the data stream of PDCP PDUs on the X2 interface. The GTP-U PDU may include an NR RAN Container with flow control information as specified in TS 38.425 [11] which is carried in the GTP-U extension header. The transport bearer is identified by the GTP-U TEID (TS 29.281 [2]) and the IP address of the E-UTRAN nodes involved in EN-DC;
- the packet processing function in the E-UTRAN node hosting the PDCP entity shall send downstream packets of a given E-RAB to the IP address indicated by the corresponding E-UTRAN node in X2AP associated to the DL transport bearer of that particular E-RAB. The packet processing function in the corresponding E-UTRAN node shall send upstream packets of a given E-RAB to the IP address indicated by the E-UTRAN node hosting the PDCP entity in X2AP associated to the UL transport bearer of that particular E-RAB;

Annex A (informative): Change history

| TSG # | TSG Doc. | CR | Rev | Subject/Comment | New |
|---------|-----------|------|-----|--|--------|
| 38 | | | | approved at TSG-RAN and placed under change control | 8.0.0 |
| 39 | RP-080078 | 0001 | - | Editorial correction on 36.424 | 8.1.0 |
| 39 | RP-080078 | 0002 | - | Data link layer proposal | 8.1.0 |
| 40 | RP-080302 | 0003 | 1 | eGTP draft reference for X2 Data Transport | 8.2.0 |
| 40 | RP-080302 | 0005 | - | Define format for TLA signalled in X2AP messages | 8.2.0 |
| 41 | RP-080583 | 0006 | 1 | X2 transport bearers | 8.3.0 |
| 42 | RP-080845 | 0007 | | Correction of SAE Bearer | 8.4.0 |
| 43 | RP-090083 | 0008 | | Correction on GTP-U version | 8.5.0 |
| 09/2009 | - | - | - | Creation of Rel-9 version based on v8.5.0 | 9.0.0 |
| 12/2010 | | | | Creation of Rel-10 version based on v. 9.0.0 | 10.0.0 |
| SP-49 | SP-100629 | | | Clarification on the use of References (TS 21.801 CR#0030) | 10.0.1 |
| 52 | RP-110684 | 0009 | | Correction of references | 10.1.0 |
| 09/2012 | | | | Update to Rel-11 version (MCC) | 11.0.0 |
| 63 | RP-140297 | 0011 | 1 | The content of Transport Layer Address | 12.0.0 |
| 66 | RP-142089 | 0013 | 6 | Data Forwarding and Data transmission | 12.1.0 |
| 67 | RP-150351 | 0021 | 1 | Correction on Data Transmission over X2 | 12.2.0 |
| 12/2015 | | | | Update to Rel-13 version (MCC) | 13.0.0 |
| 71 | RP-160449 | 0022 | 1 | Rapporteur editorial corrections | 13.1.0 |

| Change history | | | | | | | |
|----------------|---------|-----------|------|-----|-----|--|-------------|
| Date | Meeting | TDoc | CR | Rev | Cat | Subject/Comment | New version |
| 2017-03 | SA#75 | | | | | Promotion to Release 14 without technical change | 14.0.0 |
| 2017-06 | RP#76 | RP-171324 | 0024 | 2 | F | Derivation of Diffserv code point marking includes ARP | 14.1.0 |
| 2017-06 | RP#76 | RP-171324 | 0025 | | F | Clarification of the use of the RAN Container | 14.1.0 |
| 2017-06 | RP#76 | RP-171324 | 0026 | | F | Rapporteur editorial review | 14.1.0 |
| 2017-12 | RP-78 | RP-172672 | 0027 | 1 | B | Introduction of EN-DC | 15.0.0 |

History

| Document history | | |
|-------------------------|----------------|-------------|
| V15.0.0 | September 2018 | Publication |
| | | |
| | | |
| | | |
| | | |