

ETSI TS 123 032 V18.1.0 (2024-05)



**Digital cellular telecommunications system (Phase 2+) (GSM);  
Universal Mobile Telecommunications System (UMTS);  
Universal Geographical Area Description (GAD)  
(3GPP TS 23.032 version 18.1.0 Release 18)**



---

**Reference**

RTS/TSGS-0223032v10

---

**Keywords**

GSM,UMTS

**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our  
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope .....	7
2 References .....	7
3 Definitions and abbreviations.....	7
3.1 Definitions .....	7
3.2 Abbreviations .....	8
4 Reference system.....	8
5 Shapes.....	8
5.1 Ellipsoid Point .....	9
5.2 Ellipsoid point with uncertainty circle.....	9
5.3 Ellipsoid point with uncertainty ellipse .....	10
5.3a High Accuracy Ellipsoid point with uncertainty ellipse .....	10
5.3b High Accuracy Ellipsoid point with scalable uncertainty ellipse .....	10
5.4 Polygon .....	11
5.5 Ellipsoid Point with Altitude .....	11
5.6 Ellipsoid point with altitude and uncertainty ellipsoid .....	12
5.6a High Accuracy Ellipsoid point with altitude and uncertainty ellipsoid .....	12
5.6b High Accuracy Ellipsoid point with altitude and scalable uncertainty ellipsoid .....	13
5.7 Ellipsoid Arc .....	13
5.8 Local 2D point with uncertainty ellipse .....	13
5.9 Local 3D point with uncertainty ellipsoid .....	14
5.10 Range and Direction.....	14
5.11 Relative 2D Location with uncertainty ellipse .....	14
5.12 Relative 3D Location with uncertainty ellipsoid .....	15
6 Coding .....	15
6.1 Point .....	15
6.1a High Accuracy Point .....	15
6.2 Uncertainty .....	16
6.2a High Accuracy Uncertainty .....	16
6.2b High Accuracy Extended Uncertainty .....	17
6.3 Altitude.....	18
6.3a High Accuracy Altitude.....	18
6.4 Uncertainty Altitude .....	18
6.5 Confidence .....	18
6.6 Radius.....	19
6.7 Angle .....	19
7 General message format and information elements coding.....	19
7.1 Overview .....	20
7.2 Type of Shape.....	20
7.3 Shape description .....	21
7.3.1 Ellipsoid Point .....	21
7.3.2 Ellipsoid Point with uncertainty Circle .....	22
7.3.3 Ellipsoid Point with uncertainty Ellipse.....	23
7.3.3a High Accuracy Ellipsoid point with uncertainty ellipse .....	24
7.3.3b High Accuracy Ellipsoid point with scalable uncertainty ellipse.....	25
7.3.4 Polygon.....	26
7.3.5 Ellipsoid Point with Altitude .....	27
7.3.6 Ellipsoid Point with altitude and uncertainty ellipsoid .....	28
7.3.6a High Accuracy Ellipsoid point with altitude and uncertainty ellipsoid .....	29

7.3.6b	High Accuracy Ellipsoid point with altitude and scalable uncertainty ellipsoid.....	30
7.3.7	Ellipsoid Arc.....	31
8	Description of Velocity .....	32
8.1	Horizontal Velocity .....	32
8.2	Horizontal and Vertical Velocity.....	32
8.3	Horizontal Velocity with Uncertainty .....	32
8.4	Horizontal and Vertical Velocity with Uncertainty.....	32
8.4a	Relative Velocity with Uncertainty .....	33
8.5	Coding Principles .....	33
8.6	Coding of Velocity Type.....	33
8.7	Coding of Horizontal Speed .....	34
8.8	Coding of Bearing .....	34
8.9	Coding of Vertical Speed .....	34
8.10	Coding of Vertical Speed Direction .....	34
8.11	Coding of Uncertainty Speed .....	34
8.12	Coding of Horizontal Velocity .....	35
8.13	Coding of Horizontal with Vertical Velocity .....	35
8.14	Coding of Horizontal Velocity with Uncertainty .....	35
8.15	Coding of Horizontal with Vertical Velocity and Uncertainty.....	36
<b>Annex A (informative):</b>	<b>Element description in compact notation .....</b>	<b>37</b>
<b>Annex B (informative):</b>	<b>Change history .....</b>	<b>39</b>
History .....		40

---

# Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

**might not** indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

**is** (or any other verb in the indicative mood) indicates a statement of fact

**is not** (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

---

# 1 Scope

The present document defines an intermediate universal Geographical Area Description which subscriber applications, GSM, UMTS, EPS or 5GS services can use and the network can convert into an equivalent radio coverage map.

For GSM, UMTS, EPS or 5GS services which involve the use of an "area", it can be assumed that in the majority of cases the Service Requester will be forbidden access to data on the radio coverage map of a particular PLMN and that the Service Requester will not have direct access to network entities (e.g. BSC/BTS, RNC/Node B, eNB or gNB).

The interpretation by the PLMN operator of the geographical area in terms of cells actually used, cells that are partly within the given area and all other technical and quality of service aspects are out of the scope of the present document.

This specification also provides a description of velocity that may be associated with a universal Geographical Area Description when both are applied to a common entity at a common time.

The specification further provides a description of range and direction, relative location and relative velocity for a pair of devices such as 2 UEs.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] GSM 01.04: "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".
- [2] GSM 04.07: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface signalling layer 3 General aspects".
- [3] Military Standard WGS84 Metric MIL-STD-2401 (11 January 1994): "Military Standard Department of Defence World Geodetic System (WGS)".
- [4] 3GPP TS 29.572: "5G System; Location Management Services; Stage 3".

---

# 3 Definitions and abbreviations

## 3.1 Definitions

For the purposes of the present document, the following definitions apply.

**Coordinate ID:** an identifier for a reference point that defines the origin of a particular local Cartesian System.

**Local Co-ordinates:** co-ordinates relative to a local Cartesian System whose origin is expressed by a reference point. The origin may have known WGS84 coordinates. Local Co-ordinates are only applicable in 5GS.

**Service Requester:** Entity, which uses the Geographical Area Description in any protocol to inform the network about a defined area.

**Target:** Entity whose precise geographic position is to be described.



## 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in GSM 01.04 [1] and the following apply.

GAD	Geographical Area Description
GPS	Global Positioning System
WGS	World Geodetic System

---

## 4 Reference system

Except for local co-ordinates, the reference system chosen for the coding of locations is the World Geodetic System 1984, (WGS 84), which is also used by the Global Positioning System, (GPS). The origin of the WGS 84 co-ordinate system is the geometric centre of the WGS 84 ellipsoid. The ellipsoid is constructed by the rotation of an ellipse around the minor axis which is oriented in the North-South direction. The rotation axis is the polar axis of the ellipsoid, and the plane orthogonal to it and including the centre of symmetry is the equatorial plane.

The relevant dimensions are as follows:

Major Axis (a) = 6378137 m

Minor Axis (b) = 6356752,314 m

First eccentricity of the ellipsoid  $= \frac{a^2 - b^2}{b^2} = 0,0066943800668$

Co-ordinates are then expressed in terms of longitude and latitude relevant to this ellipsoid. The range of longitude is  $-180^\circ$  to  $+180^\circ$ , and the range of latitude is  $-90^\circ$  to  $+90^\circ$ .  $0^\circ$  longitude corresponds to the Greenwich Meridian, and positive angles are to the East, while negative angles are to the West.  $0^\circ$  latitude corresponds to the equator, and positive angles are to the North, while negative angles are to the South. Altitudes are defined as the distance between the ellipsoid and the point, along a line orthogonal to the ellipsoid.

Local Co-ordinates are relative to a known reference point defined by a unique Coordinate ID configured by the PLMN operator. Local co-ordinates are then expressed in a local Cartesian co-ordinates system relative to the reference point.

---

## 5 Shapes

The intention is to incorporate a number of different shapes, that can be chosen according to need.

- Ellipsoid Point;
- Ellipsoid point with uncertainty circle;
- Ellipsoid point with uncertainty ellipse;
- Polygon;
- Ellipsoid point with altitude;
- Ellipsoid point with altitude and uncertainty ellipse;
- Ellipsoid Arc;
- High Accuracy Ellipsoid point with uncertainty ellipse;
- High Accuracy Ellipsoid point with scalable uncertainty ellipse;
- High Accuracy Ellipsoid point with altitude and uncertainty ellipse;
- High Accuracy Ellipsoid point with altitude and scalable uncertainty ellipse.

Shapes relevant to Local Co-ordinates:

- Local 2D point with uncertainty ellipse (only in 5GS);
- Local 3D point with uncertainty ellipsoid (only in 5GS).

Shapes relevant to a pair of devices:

- Range and Direction (only in 5GS);
- Relative Location (only in 5GS).

Each shape is discussed individually.

## 5.1 Ellipsoid Point

The description of an ellipsoid point is that of a point on the surface of the ellipsoid, and consists of a latitude and a longitude. In practice, such a description can be used to refer to a point on Earth's surface, or close to Earth's surface, with the same longitude and latitude. No provision is made in this version of the standard to give the height of a point.

Figure 1 illustrates a point on the surface of the ellipsoid and its co-ordinates.

The latitude is the angle between the equatorial plane and the perpendicular to the plane tangent to the ellipsoid surface at the point. Positive latitudes correspond to the North hemisphere. The longitude is the angle between the half-plane determined by the Greenwich meridian and the half-plane defined by the point and the polar axis, measured Eastward.

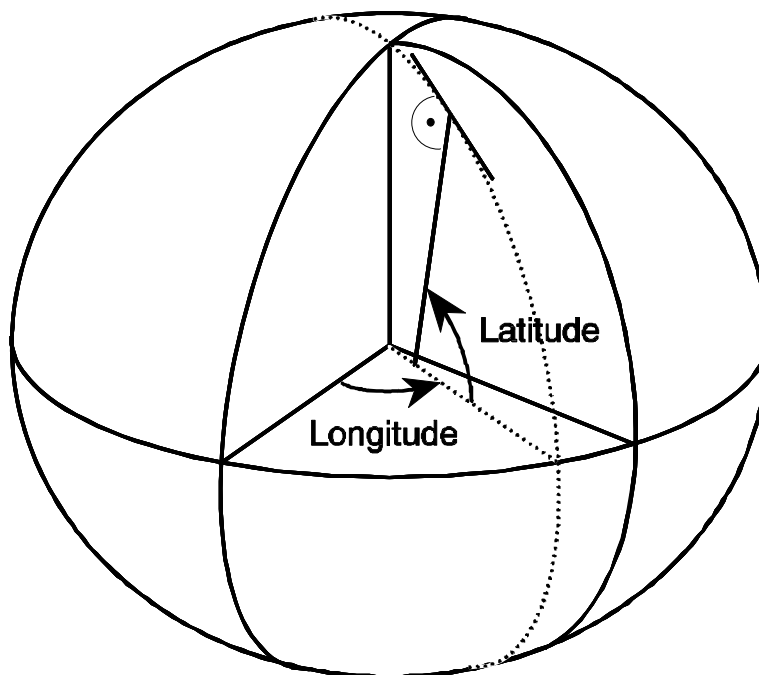


Figure 1: Description of a Point as two co-ordinates

## 5.2 Ellipsoid point with uncertainty circle

The "ellipsoid point with uncertainty circle" is characterised by the co-ordinates of an ellipsoid point (the origin) and a distance  $r$ . It describes formally the set of points on the ellipsoid which are at a distance from the origin less than or equal to  $r$ , the distance being the geodesic distance over the ellipsoid, i.e., the minimum length of a path staying on the ellipsoid and joining the two points, as shown in figure 2.

As for the ellipsoid point, this can be used to indicate points on the Earth surface, or near the Earth surface, of same latitude and longitude.

The typical use of this shape is to indicate a point when its position is known only with a limited accuracy.




Figure 2: Description of an uncertainty Circle

### 5.3 Ellipsoid point with uncertainty ellipse

The "ellipsoid point with uncertainty ellipse" is characterised by the co-ordinates of an ellipsoid point (the origin), distances  $r1$  and  $r2$  and an angle of orientation  $A$ . It describes formally the set of points on the ellipsoid which fall within or on the boundary of an ellipse with semi-major axis of length  $r1$  oriented at angle  $A$  ( $0$  to  $180^\circ$ ) measured clockwise from north and semi-minor axis of length  $r2$ , the distances being the geodesic distance over the ellipsoid, i.e., the minimum length of a path staying on the ellipsoid and joining the two points, as shown in figure 2a.

As for the ellipsoid point, this can be used to indicate points on the Earth's surface, or near the Earth's surface, of same latitude and longitude. The confidence level with which the position of a target entity is included within this set of points is also included with this shape.

The typical use of this shape is to indicate a point when its position is known only with a limited accuracy, but the geometrical contributions to uncertainty can be quantified.

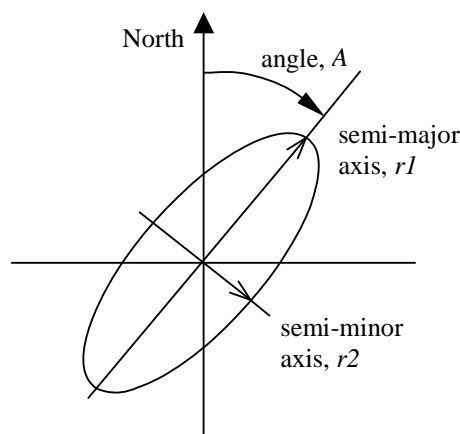


Figure 2a: Description of an uncertainty Ellipse

#### 5.3a High Accuracy Ellipsoid point with uncertainty ellipse

The "high accuracy ellipsoid point with uncertainty ellipse" is characterised by the co-ordinates of an ellipsoid point (the origin), distances  $r1$  and  $r2$  and an angle of orientation  $A$ , as described in clause 5.3. Compared to the "ellipsoid point with uncertainty ellipse", the "high accuracy ellipsoid point with uncertainty ellipse" provides finer resolution for the co-ordinates, and distances  $r1$  and  $r2$ .

#### 5.3b High Accuracy Ellipsoid point with scalable uncertainty ellipse

The "high accuracy ellipsoid point with scalable uncertainty ellipse" is characterised by the co-ordinates of an ellipsoid point (the origin), distances  $r1$  and  $r2$  and an angle of orientation  $A$ , as described in clause 5.3. Compared to the "ellipsoid point with uncertainty ellipse", the "high accuracy ellipsoid point with scalable uncertainty ellipse" provides

finer resolution for the co-ordinates, and distances  $r1$  and  $r2$ , and additionally provides possibility to choose uncertainty range compared to "high accuracy ellipsoid point with uncertainty ellipse".

## 5.4 Polygon

A polygon is an arbitrary shape described by an ordered series of points (in the example pictured in the drawing, A to E). The minimum number of points allowed is 3, and the maximum number of points allowed is 15. The points shall be connected in the order that they are given. A connecting line is defined as the line over the ellipsoid joining the two points and of minimum distance (geodesic). The last point is connected to the first. The list of points shall respect a number of conditions:

- a connecting line shall not cross another connecting line;
- two successive points must not be diametrically opposed on the ellipsoid.

The described area is situated to the right of the lines with the downward direction being toward the Earth's centre and the forward direction being from a point to the next.

NOTE: This definition does not permit connecting lines greater than roughly 20 000 km. If such a need arises, the polygon can be described by adding an intermediate point.

Computation of geodesic lines is not simple. Approximations leading to a maximum distance between the computed line and the geodesic line of less than 3 metres are acceptable.

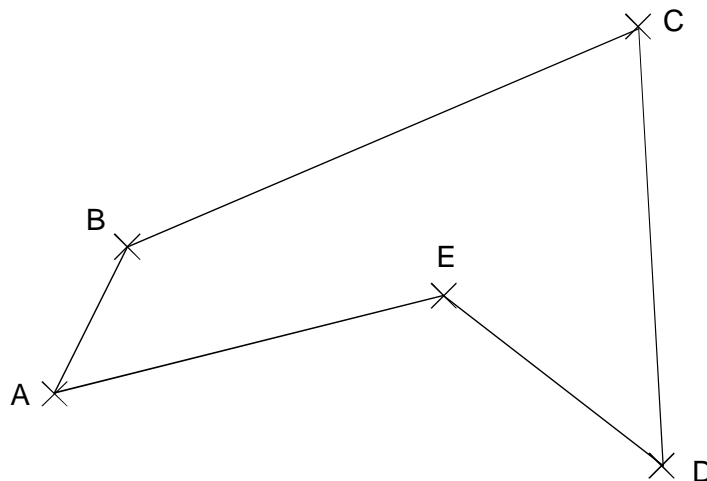


Figure 3: Description of a Polygon

## 5.5 Ellipsoid Point with Altitude

The description of an ellipsoid point with altitude is that of a point at a specified distance above or below a point on the earth's surface. This is defined by an ellipsoid point with the given longitude and latitude and the altitude above or below the ellipsoid point. Figure 3a illustrates the altitude aspect of this description.

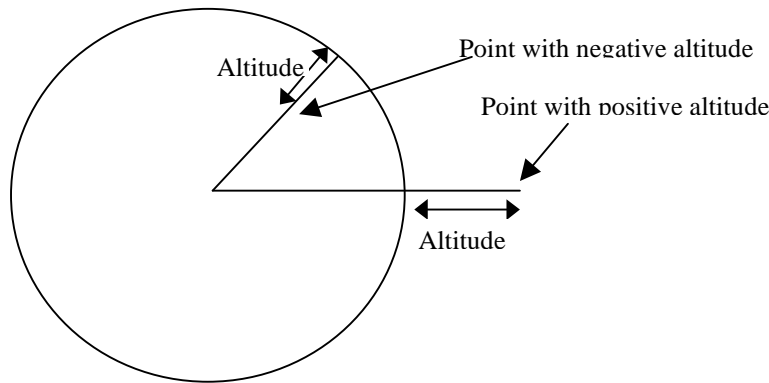


Figure 3a: Description of an Ellipsoid Point with Altitude

## 5.6 Ellipsoid point with altitude and uncertainty ellipsoid

The "ellipsoid point with altitude and uncertainty ellipsoid" is characterised by the co-ordinates of an ellipsoid point with altitude, distances  $r1$  (the "semi-major uncertainty"),  $r2$  (the "semi-minor uncertainty") and  $r3$  (the "vertical uncertainty") and an angle of orientation  $A$  (the "angle of the major axis"). It describes formally the set of points which fall within or on the surface of a general (three dimensional) ellipsoid centred on an ellipsoid point with altitude whose real semi-major, semi-mean and semi-minor axis are some permutation of  $r1$ ,  $r2$ ,  $r3$  with  $r1 \geq r2$ . The  $r3$  axis is aligned vertically, while the  $r1$  axis, which is the semi-major axis of the ellipse in a horizontal plane that bisects the ellipsoid, is oriented at an angle  $A$  (0 to 180 degrees) measured clockwise from north, as illustrated in Figure 3b.

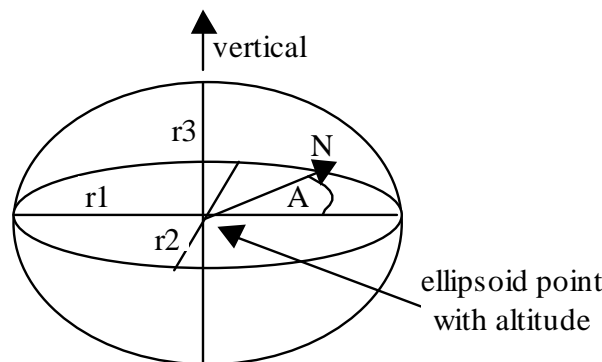


Figure 3b: Description of an Ellipsoid Point with Altitude and Uncertainty Ellipsoid

The typical use of this shape is to indicate a point when its horizontal position and altitude are known only with a limited accuracy, but the geometrical contributions to uncertainty can be quantified. The confidence level with which the position of a target entity is included within the shape is also included.

### 5.6a High Accuracy Ellipsoid point with altitude and uncertainty ellipsoid

The "high accuracy ellipsoid point with altitude and uncertainty ellipsoid" is characterised by the co-ordinates of an ellipsoid point with altitude, distances  $r1$  (the "semi-major uncertainty"),  $r2$  (the "semi-minor uncertainty") and  $r3$  (the "vertical uncertainty") and an angle of orientation  $A$  (the "angle of the major axis"), as described in clause 5.6. Compared to the "ellipsoid point with altitude and uncertainty ellipsoid", the "high accuracy ellipsoid point with altitude and uncertainty ellipsoid" provides finer resolution for the co-ordinates, and distances  $r1$ ,  $r2$ , and  $r3$ .

## 5.6b High Accuracy Ellipsoid point with altitude and scalable uncertainty ellipsoid

The "high accuracy ellipsoid point with altitude and scalable uncertainty ellipsoid" is characterised by the co-ordinates of an ellipsoid point with altitude, distances  $r1$  (the "semi-major uncertainty"),  $r2$  (the "semi-minor uncertainty") and  $r3$  (the "vertical uncertainty") and an angle of orientation  $A$  (the "angle of the major axis"), as described in clause 5.6. Compared to the "ellipsoid point with altitude and uncertainty ellipsoid", the "high accuracy ellipsoid point with altitude and scalable uncertainty ellipsoid" provides finer resolution for the co-ordinates, and distances  $r1$ ,  $r2$ , and  $r3$ , and additionally provides possibility to choose uncertainty range compared to "high accuracy ellipsoid point with altitude and uncertainty ellipsoid".

## 5.7 Ellipsoid Arc

An ellipsoid arc is a shape characterised by the co-ordinates of an ellipsoid point  $o$  (the origin), inner radius  $r1$ , uncertainty radius  $r2$ , both radii being geodesic distances over the surface of the ellipsoid, the offset angle ( $\theta$ ) between the first defining radius of the ellipsoid arc and North, and the included angle ( $\beta$ ) being the angle between the first and second defining radii. The offset angle is within the range of  $0^\circ$  to  $359,999\dots^\circ$  while the included angle is within the range from  $0,000\dots1^\circ$  to  $360^\circ$ . This is to be able to describe a full circle,  $0^\circ$  to  $360^\circ$ .

This shape-definition can also be used to describe a sector (inner radius equal to zero), a circle (included angle equal to  $360^\circ$ ) and other circular shaped areas. The confidence level with which the position of a target entity is included within the shape is also included.

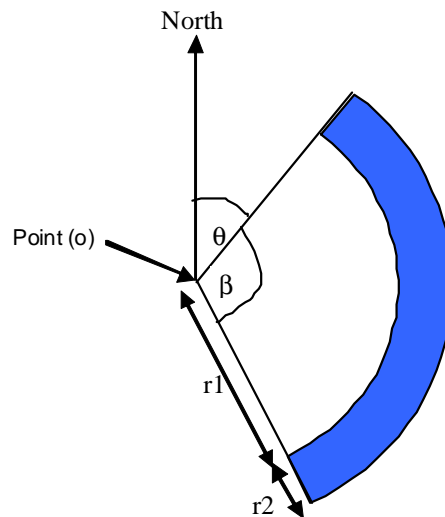


Figure 3c: Description of an Ellipsoid Arc

## 5.8 Local 2D point with uncertainty ellipse

The "local 2D point with uncertainty ellipse" is characterised by a point described in 2D local co-ordinates with origin in a known reference location, distances  $r1$  and  $r2$  and an angle of orientation  $A$ . The local Cartesian co-ordinates system and the reference location shall be identified with a unique identifier. It describes formally the set of points which fall within or on the boundary of an ellipse with semi-major axis of length  $r1$  oriented at angle  $A$  ( $0$  to  $180^\circ$ ) measured clockwise from north and semi-minor axis of length  $r2$ . The confidence level with which the position of a target entity is included within this set of points is also included with this shape.

This shape is only applicable to 5GS.

The structure of local 2D point with uncertainty ellipse is defined in clause 6.1.6.2.38 in TS 29.572 [4].

## 5.9 Local 3D point with uncertainty ellipsoid

The "local 3D point with uncertainty ellipsoid" is characterised by a point described in 3D local co-ordinates with origin in a known reference location, distances  $r1$  (the "semi-major uncertainty"),  $r2$  (the "semi-minor uncertainty") and  $r3$  (the "vertical uncertainty") and an angle of orientation  $A$  (the "angle of the major axis"). The local Cartesian co-ordinates system and the reference location shall be identified with a unique identifier. It describes formally the set of points which fall within or on the surface of a general (three dimensional) ellipsoid centred on a 3D point whose real semi-major, semi-mean and semi-minor axis are some permutation of  $r1$ ,  $r2$ ,  $r3$  with  $r1 \geq r2$ . The  $r3$  axis is aligned vertically, while the  $r1$  axis, which is the semi-major axis of the ellipse in a horizontal plane, is oriented at an angle  $A$  (0 to 180 degrees) measured clockwise from north. The confidence level with which the position of a target entity is included within the shape is also included.

This shape is only applicable to 5GS.

The structure of local 3D point with uncertainty ellipsoid is defined in clause 6.1.6.2.39 in TS 29.572 [4].

## 5.10 Range and Direction

The "range and direction" from a point A to a point B is characterised by three components comprising a range from point A to point B, an azimuth direction from point A to point B and an elevation direction from point A to point B as shown in Figure 3d. The range provides a straight-line distance from point A to point B. The azimuth provides a direction to point B from point A in a horizontal plane through point A and as measured clockwise from North. The elevation provides a direction to point B from point A in a vertical plane through the points A and B and as measured upwards or downwards from a horizontal plane through point A. The range, azimuth and elevation can be each independently included or excluded in a "range and direction" and each has an uncertainty and a confidence.

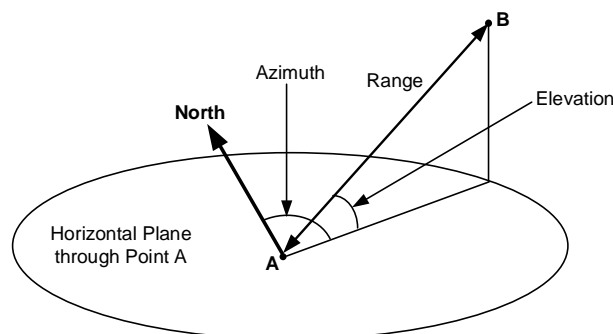


Figure 3d: Description of a Range and Direction

Editor's note: Support of this shape will be confirmed by RAN WGs.

## 5.11 Relative 2D Location with uncertainty ellipse

The "relative 2D location with uncertainty ellipse" is characterised by a point described in 2D local co-ordinates with origin corresponding to another known point, distances  $r1$  and  $r2$  and an angle of orientation  $A$ . It describes formally a set of points which fall within or on the boundary of an ellipse centered on a 2D point with semi-major axis of length  $r1$  oriented at angle  $A$  (0 to 180 degrees) measured clockwise from North and semi-minor axis of length  $r2$ . The confidence level with which the position of a target entity is included within this set of points is also included with this shape.

This shape is only applicable to 5GS.

Editor's note: The structure of a relative 2D location with uncertainty ellipse will be defined by CT WGs.

Editor's note: Support of this shape will be confirmed by RAN WGs.

## 5.12 Relative 3D Location with uncertainty ellipsoid

The "relative 3D location with uncertainty ellipsoid" is characterised by a point described in 3D local co-ordinates with origin corresponding to another known point, distances  $r_1$  (the "semi-major uncertainty"),  $r_2$  (the "semi-minor uncertainty") and  $r_3$  (the "vertical uncertainty") and an angle of orientation  $A$  (the "angle of the major axis"). It describes formally the set of points which fall within or on the surface of a general (three dimensional) ellipsoid centred on a 3D point whose semi-major, semi-minor and semi-mean axis are, respectively,  $r_1$ ,  $r_2$ ,  $r_3$  with  $r_1 \geq r_2$ . The  $r_3$  axis is aligned vertically, while the  $r_1$  axis, which is the semi-major axis of the ellipse in a horizontal plane, is oriented at an angle  $A$  (0 to 180 degrees) measured clockwise from North. The confidence level with which the position of a target entity is included within the shape is also included.

This shape is only applicable to 5GS.

**Editor's note:** The structure of a relative 3D location with uncertainty ellipsoid will be defined by CT WGs.

**Editor's note:** Support of this shape will be confirmed by RAN WGs.

---

## 6 Coding

### 6.1 Point

The co-ordinates of an ellipsoid point are coded with an uncertainty of less than 3 metres.

The latitude is coded with 24 bits: 1 bit of sign and a number between 0 and  $2^{23}-1$  coded in binary on 23 bits. The relation between the coded number  $N$  and the range of (absolute) latitudes  $X$  it encodes is the following ( $X$  in degrees):

$$N \leq \frac{2^{23}}{90} X < N + 1$$

except for  $N=2^{23}-1$ , for which the range is extended to include  $N+1$ .

The longitude, expressed in the range  $-180^\circ$ ,  $+180^\circ$ , is coded as a number between  $-2^{23}$  and  $2^{23}-1$ , coded in 2's complement binary on 24 bits. The relation between the coded number  $N$  and the range of longitude  $X$  it encodes is the following ( $X$  in degrees):

$$N \leq \frac{2^{24}}{360} X < N + 1$$

#### 6.1a High Accuracy Point

The co-ordinates of a high accuracy ellipsoid point are coded with a resolution of less than 5 millimetre for latitude, and less than 10 millimetre for longitude.

The latitude for a high accuracy point, expressed in the range  $-90^\circ$ ,  $+90^\circ$ , is coded as a number between  $-2^{31}$  and  $2^{31}-1$ , coded in 2's complement binary on 32 bits. The relation between the latitude  $X$  in the range  $[-90^\circ, 90^\circ]$  and the coded number  $N$  is:

$$N = \left\lfloor \frac{X}{90^\circ} 2^{31} \right\rfloor$$

where  $\lfloor x \rfloor$  denotes the greatest integer less than or equal to  $x$  (floor operator).

The longitude for a high accuracy point, expressed in the range  $-180^\circ$ ,  $+180^\circ$ , is coded as a number between  $-2^{31}$  and  $2^{31}-1$ , coded in 2's complement binary on 32 bits. The relation between the longitude  $X$  in the range  $[-180^\circ, 180^\circ]$  and the coded number  $N$  is:



$$N = \left\lfloor \frac{X}{180^\circ} 2^{31} \right\rfloor$$

## 6.2 Uncertainty

A method of describing the uncertainty for latitude and longitude has been sought which is both flexible (can cover wide differences in range) and efficient. The proposed solution makes use of a variation on the Binomial expansion. The uncertainty  $r$ , expressed in metres, is mapped to a number  $K$ , with the following formula:

$$r = C((1+x)^K - 1)$$

with  $C = 10$  and  $x = 0,1$ . With  $0 \leq K \leq 127$ , a suitably useful range between 0 and 1800 kilometres is achieved for the uncertainty, while still being able to code down to values as small as 1 metre. The uncertainty can then be coded on 7 bits, as the binary encoding of  $K$ .

**Table 1: Example values for the uncertainty Function**

Value of $K$	Value of uncertainty
0	0 m
1	1 m
2	2,1 m
-	-
20	57,3 m
-	-
40	443 m
-	-
60	3 km
-	-
80	20 km
-	-
100	138 km
-	-
120	927 km
-	-
127	1800 km

### 6.2a High Accuracy Uncertainty

The high accuracy uncertainty  $r$ , expressed in metres, is mapped to a number  $K$ , with the following formula:

$$r = C((1+x)^K - 1)$$

with  $C = 0.3$  and  $x = 0.02$ . With  $0 \leq K \leq 255$ , a suitably useful range between 0 and 46.49129 metres is achieved for the high accuracy uncertainty, while still being able to code down to values as small as 6 millimetre. The uncertainty can then be coded on 8 bits, as the binary encoding of  $K$ .

**Table 6.2a-1: Example values for the high accuracy uncertainty function**

Value of $K$	Value of uncertainty
0	0 m
1	0.006 m
2	0.01212 m
-	-
20	0.14578 m
-	-
40	0.36241 m
-	-
60	0.68430 m
-	-
80	1.16263 m
-	-
100	1.87339 m
-	-
120	2.92954 m
-	-
127	3.40973 m
-	-
255	46.49129 m

## 6.2b High Accuracy Extended Uncertainty

The high accuracy extended uncertainty  $r$ , expressed in metres, is mapped to a number  $K$ , with the following formula:

$$r = C((1+x)^K - 1)$$

with  $C = 0.3$  and  $x = 0.02594$ , with  $0 * K * 253$ , and  $r = 200$  m with  $K=254$ , and  $r > 200$  m with  $K=255$  a suitably useful range between 0 and 200 metres is achieved for the high accuracy uncertainty, while still being able to code down to values as small as 8 millimetres. The uncertainty can then be coded on 8 bits, as the binary encoding of  $K$ .

**Table 6.2b-1: Example values for the high accuracy uncertainty function**

Value of $K$	Value of uncertainty
0	0 m
1	0.00778 m
2	0.01577 m
-	-
20	0.20068 m
-	-
40	0.53560 m
-	-
60	1.09457 m
-	-
80	2.02744 m
-	-
100	3.58434 m
-	-
120	6.18271 m
-	-
127	7.45551 m
-	-
253	195.12396 m
254	200 m
255	> 200 m

## 6.3 Altitude

Altitude is encoded in increments of 1 meter using a 15 bit binary coded number  $N$ . The relation between the number  $N$  and the range of altitudes  $a$  (in metres) it encodes is described by the following equation:

$$N \leq a < N + 1$$

Except for  $N=2^{15}-1$  for which the range is extended to include all greater values of  $a$ .

The direction of altitude is encoded by a single bit with bit value 0 representing height above the WGS84 ellipsoid surface and bit value 1 representing depth below the WGS84 ellipsoid surface.

### 6.3a High Accuracy Altitude

High accuracy altitude is encoded as a number  $N$  between -64000 and 1280000 using 2's complement binary on 22 bits. The relation between the number  $N$  and the altitude  $a$  (in metres) it encodes is described by the following equation:

$$a = N \times 2^{-7}$$

So, the altitude for a high accuracy point, with a scale factor of  $2^{-7}$ , ranges between -500 metres and 10000 metres. The altitude is encoded representing height above (plus) or below (minus) the WGS84 ellipsoid surface.

## 6.4 Uncertainty Altitude

The uncertainty in altitude,  $h$ , expressed in metres is mapped from the binary number  $K$ , with the following formula:

$$h = C((1 + x)^K - 1)$$

with  $C = 45$  and  $x = 0,025$ . With  $0 \leq K \leq 127$ , a suitably useful range between 0 and 990 meters is achieved for the uncertainty altitude. The uncertainty can then be coded on 7 bits, as the binary encoding of  $K$ .

**Table 2: Example values for the uncertainty altitude Function**

Value of $K$	Value of uncertainty altitude
0	0 m
1	1,13 m
2	2,28 m
-	-
20	28,7 m
-	-
40	75,8 m
-	-
60	153,0 m
-	-
80	279,4 m
-	-
100	486,6 m
-	-
120	826,1 m
-	-
127	990,5 m

## 6.5 Confidence

The confidence by which the position of a target entity is known to be within the shape description, (expressed as a percentage) is directly mapped from the 7 bit binary number  $K$ , except for  $K=0$  which is used to indicate 'no information', and  $100 < K \leq 128$  which should not be used but may be interpreted as "no information" if received.

## 6.6 Radius

Inner radius is encoded in increments of 5 meters using a 16 bit binary coded number  $N$ . The relation between the number  $N$  and the range of radius  $r$  (in metres) it encodes is described by the following equation:

$$5N \leq r < 5(N + 1)$$

Except for  $N=2^{16}-1$  for which the range is extended to include all greater values of  $r$ .  
This provides a true maximum radius of 327,675 meters.

The uncertainty radius is encoded as for the uncertainty latitude and longitude.

## 6.7 Angle

Offset and Included angle are encoded in increments of  $2^\circ$  using an 8 bit binary coded number  $N$  in the range 0 to 179. The relation between the number  $N$  and the range offset ( $ao$ ) and included ( $ai$ ) of angles (in degrees) it encodes is described by the following equations:

Offset angle ( $ao$ )

$$2N \leq ao < 2(N+1) \quad \text{Accepted values for } ao \text{ are within the range from 0 to } 359,9\dots9 \text{ degrees.}$$

Included angle ( $ai$ )

$$2N < ai \leq 2(N+1) \quad \text{Accepted values for } ai \text{ are within the range from } 0,0\dots1 \text{ to } 360 \text{ degrees.}$$

---

# 7 General message format and information elements coding

This clause describes a coding method for geographical area descriptions. A geographical area description is coded as a finite bit string. In the figures, the bit string is described by octets from top downward, and in the octet from left to right. Number encoding strings start with the most significant bit.

## 7.1 Overview

A bit string encoding a geographical description shall consist of the following parts:

- Type of Shape;
- Shape Description.

Such a bit string is usually part of an information element. The structure of the information element (e.g., element identifier, length) depends on the protocol in which the message containing the description is defined, and is specified in the protocol specification.

This organisation is illustrated in the example shown in figure 4.

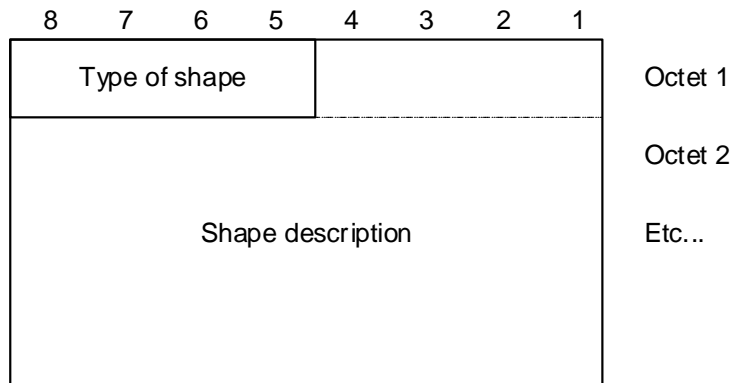


Figure 4: Example

## 7.2 Type of Shape

The Type of Shape information field identifies the type which is being coded in the Shape Description. The Type of Shape is coded as shown in table 2a.

Table 2a: Coding of Type of Shape


Bits	
4 3 2 1	
0 0 0 0	Ellipsoid Point
0 0 0 1	Ellipsoid point with uncertainty Circle
0 0 1 1	Ellipsoid point with uncertainty Ellipse
0 1 0 1	Polygon
1 0 0 0	Ellipsoid point with altitude
1 0 0 1	Ellipsoid point with altitude and uncertainty Ellipsoid
1 0 1 0	Ellipsoid Arc
1 0 1 1	High Accuracy Ellipsoid point with uncertainty ellipse
1 1 0 0	High Accuracy Ellipsoid point with altitude and uncertainty ellipsoid
1 1 0 1	High Accuracy Ellipsoid point with scalable uncertainty ellipse
1 1 1 0	High Accuracy Ellipsoid point with altitude and scalable uncertainty ellipsoid
other values	reserved for future use

## 7.3 Shape description

The shape description consist of different elements.

### 7.3.1 Ellipsoid Point

The coding of a point is described in figure 5.

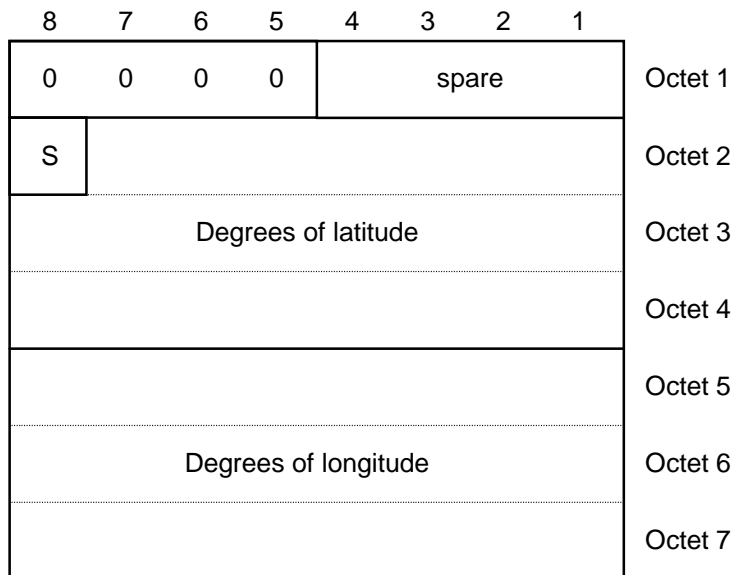

**Figure 5: Shape description of a point**

S: Sign of latitude

Bit value 0 North

Bit value 1 South


Degrees of latitude

Bit 1 of octet 4 is the low order bit

Degrees of longitude

Bit 1 of octet 7 is the low order bit

### 7.3.2 Ellipsoid Point with uncertainty Circle

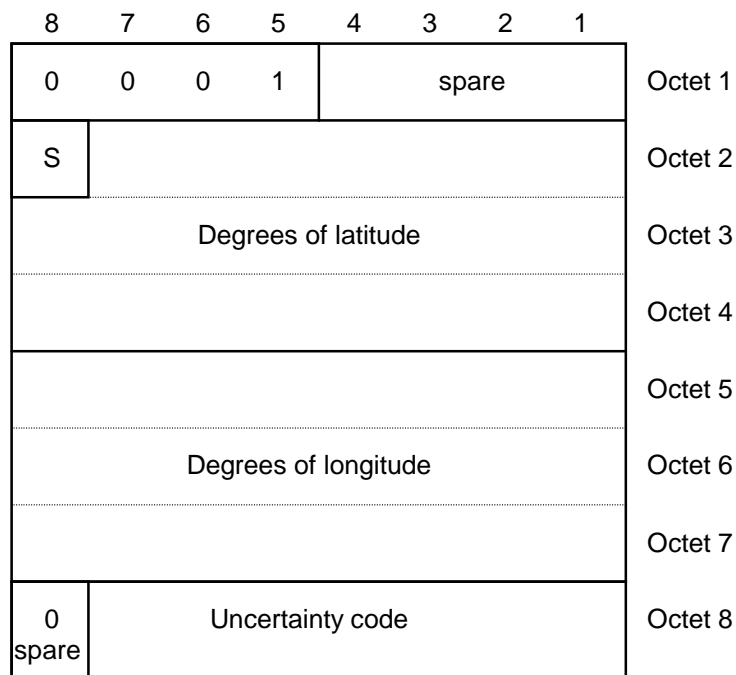

**Figure 6: Shape description of an ellipsoid point with uncertainty circle**

### 7.3.3 Ellipsoid Point with uncertainty Ellipse

8	7	6	5	4	3	2	1	
0	0	1	1	spare				Octet 1
S								Octet 2
Degrees of latitude								Octet 3
								Octet 4
								Octet 5
Degrees of longitude								Octet 6
								Octet 7
0 spare	Uncertainty semi-major							Octet 8
0 spare	Uncertainty semi-minor							Octet 9
Orientation of major axis								Octet 10
0 spare	Confidence							Octet 11

**Figure 6a: Shape description of an ellipsoid point with uncertainty ellipse**


Orientation of major axis

angle in degrees between the major axis and north

(0 = north, 90 = east, values of 180 and above are not used)



### 7.3.3a High Accuracy Ellipsoid point with uncertainty ellipse

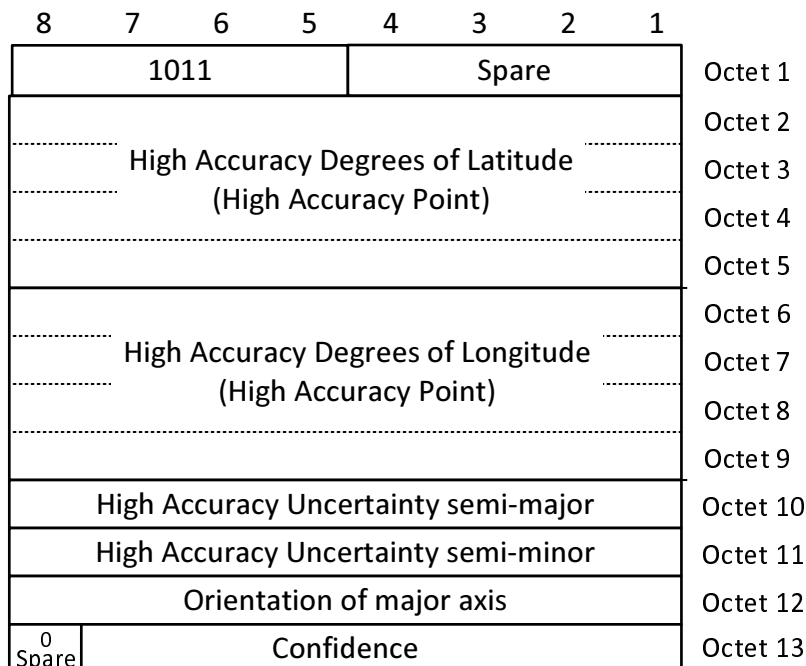

**Figure 7.3.3a-1: Shape description of a high accuracy ellipsoid point with uncertainty ellipse**

High Accuracy Degrees of Latitude:

Bit 8 of octet 2 is the high order bit.

Bit 1 of octet 5 is the low order bit.

High Accuracy Degrees of Longitude:

Bit 8 of octet 6 is the high order bit.


Bit 1 of octet 9 is the low order bit.

Orientation of major axis:

angle in degrees between the major axis and north

(0 = north, 90 = east, values of 180 and above are not used).

### 7.3.3b High Accuracy Ellipsoid point with scalable uncertainty ellipse

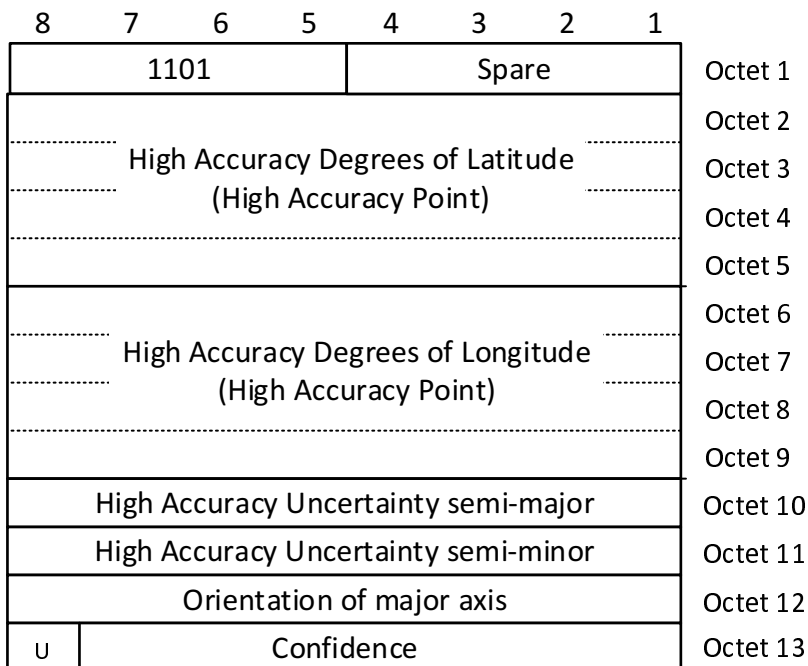

**Figure 7.3.3b-1: Shape description of a high accuracy ellipsoid point with uncertainty ellipse**

High Accuracy Degrees of Latitude:

Bit 8 of octet 2 is the high order bit.

Bit 1 of octet 5 is the low order bit.

High Accuracy Degrees of Longitude:

Bit 8 of octet 6 is the high order bit.

Bit 1 of octet 9 is the low order bit.

Orientation of major axis:

angle in degrees between the major axis and north


(0 = north, 90 = east, values of 180 and above are not used).

U: Uncertainty Range

Bit value 0 High Accuracy default uncertainty range used.

Bit value 1 High Accuracy Extended Uncertainty Range used.

### 7.3.4 Polygon

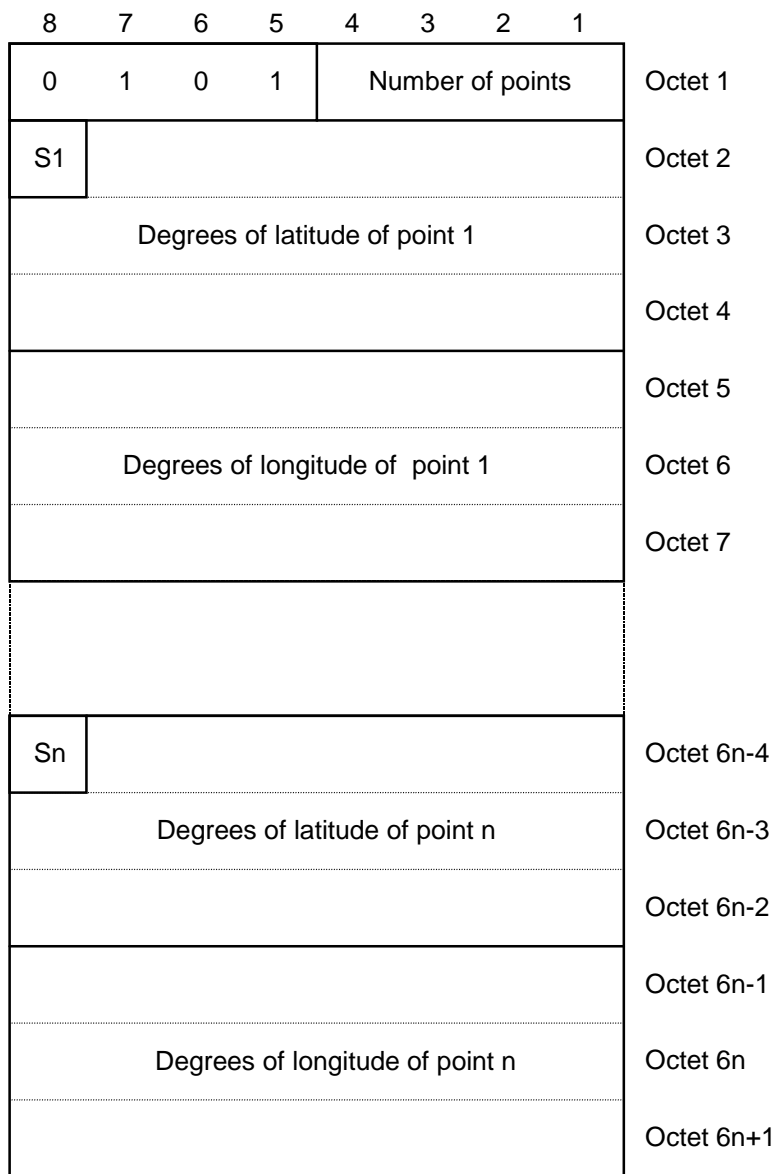


**Figure 7: Shape description of a polygon**

The number of points field encodes in binary on 4 bits the number n of points in the description, and ranges from 3 to 15.

### 7.3.5 Ellipsoid Point with Altitude

The coding of an ellipsoid point with altitude is described in figure 8.

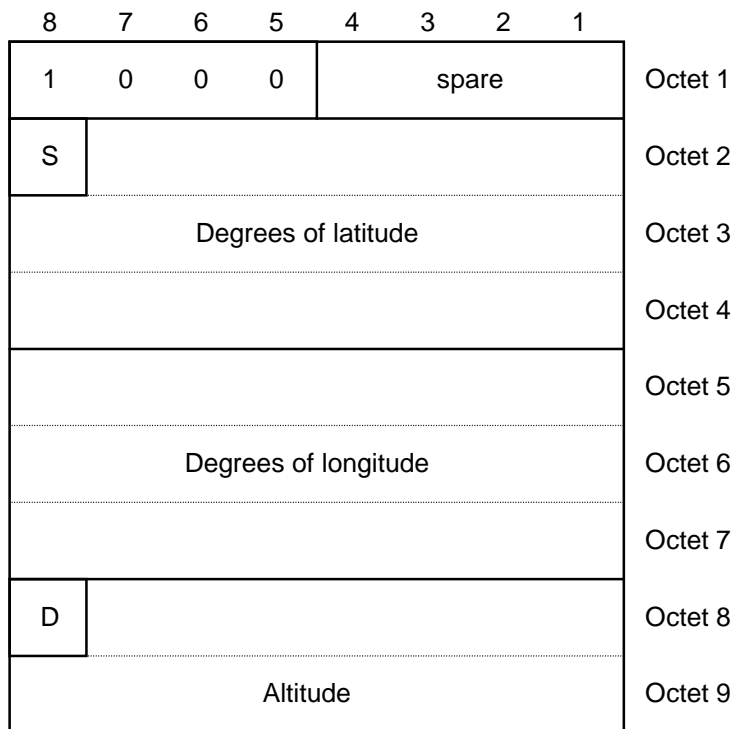

**Figure 8: Shape description of an ellipsoid point with altitude**

D: Direction of Altitude

Bit value 0 Altitude expresses height

Bit value 1 Altitude expresses depth

Altitude


Bit 1 of octet 9 is the low order bit

### 7.3.6 Ellipsoid Point with altitude and uncertainty ellipsoid

8	7	6	5	4	3	2	1	
1	0	0	1	spare				Octet 1
S								Octet 2
Degrees of latitude								Octet 3
								Octet 4
								Octet 5
Degrees of longitude								Octet 6
								Octet 7
D								Octet 8
Altitude								Octet 9
0 spare	Uncertainty semi-major							Octet 10
0 spare	Uncertainty semi-minor							Octet 11
Orientation of major axis								Octet 12
0 spare	Uncertainty Altitude							Octet 13
0 spare	Confidence							Octet 14

**Figure 9: Shape description of an ellipsoid point with altitude and uncertainty ellipsoid**

7.3.6a High Accuracy Ellipsoid point with altitude and uncertainty ellipsoid

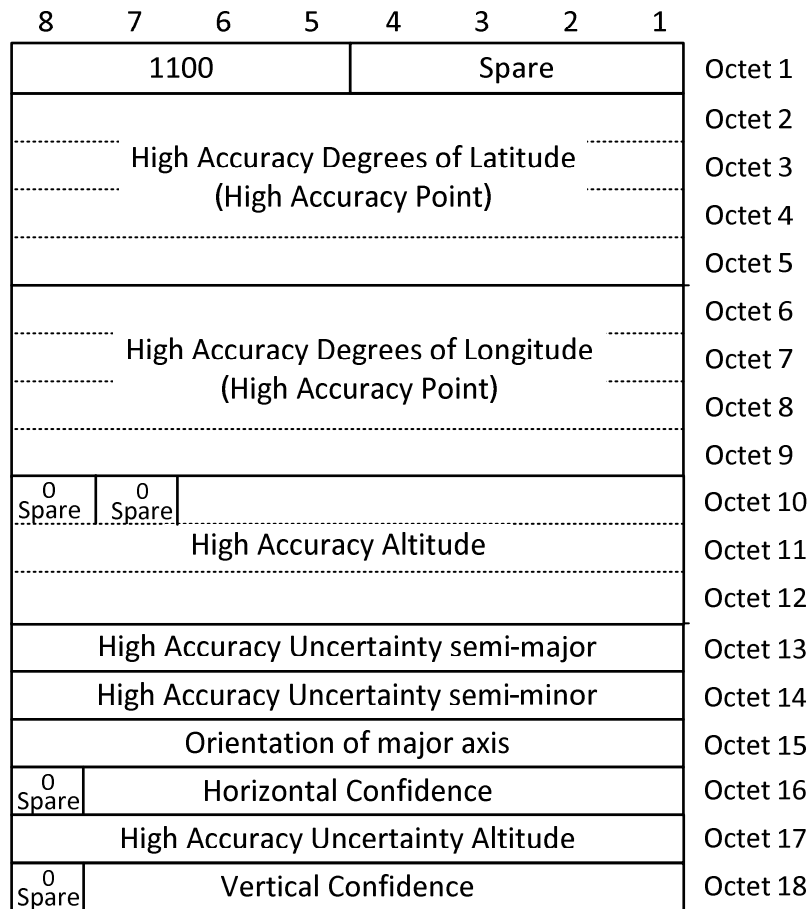

**Figure 7.3.6a-1: Shape description of an High Accuracy Ellipsoid point with altitude and uncertainty ellipsoid**

High Accuracy Degrees of Latitude:

Bit 8 of octet 2 is the high order bit.

Bit 1 of octet 5 is the low order bit.

High Accuracy Degrees of Longitude:

Bit 8 of octet 6 is the high order bit.

Bit 1 of octet 9 is the low order bit.

High Accuracy Altitude:

Bit 6 of octet 10 is the high order bit.

Bit 1 of octet 12 is the low order bit.


Orientation of major axis:

angle in degrees between the major axis and north

(0 = north, 90 = east, values of 180 and above are not used).

NOTE: The same "High Accuracy Uncertainty" (defined in clause 6.2a) is used for both horizontal and vertical location.

### 7.3.6b High Accuracy Ellipsoid point with altitude and scalable uncertainty ellipsoid

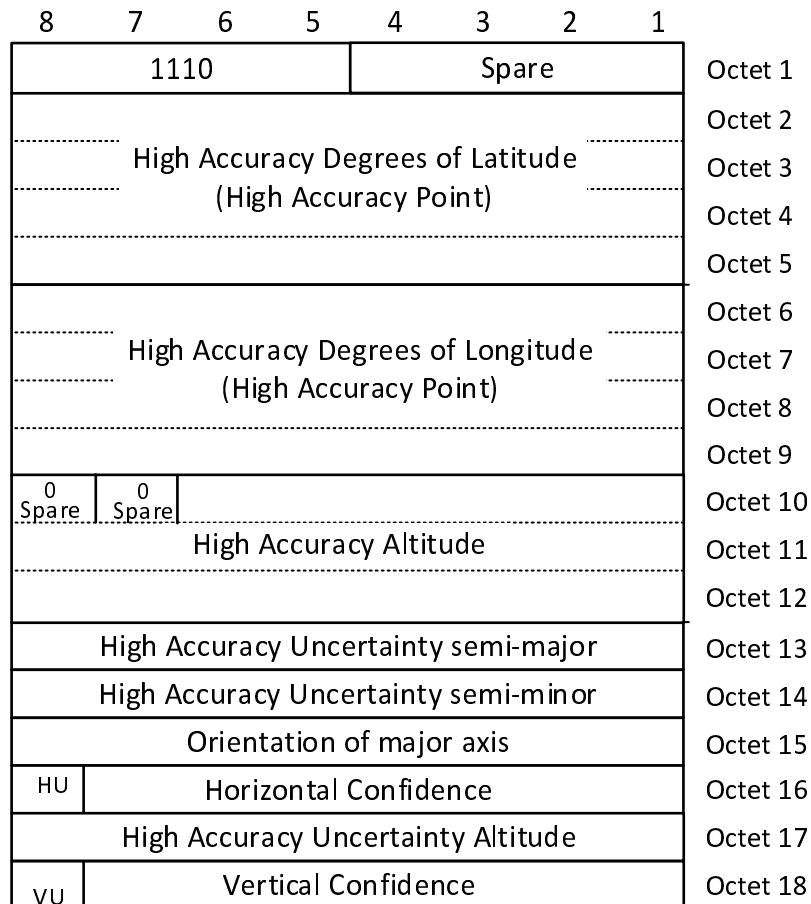

**Figure 7.3.6b-1: Shape description of a High Accuracy Ellipsoid point with altitude and uncertainty ellipsoid**

High Accuracy Degrees of Latitude:

Bit 8 of octet 2 is the high order bit.

Bit 1 of octet 5 is the low order bit.

High Accuracy Degrees of Longitude:

Bit 8 of octet 6 is the high order bit.

Bit 1 of octet 9 is the low order bit.

High Accuracy Altitude:

Bit 6 of octet 10 is the high order bit.

Bit 1 of octet 12 is the low order bit.

Orientation of major axis:

angle in degrees between the major axis and north

(0 = north, 90 = east, values of 180 and above are not used).

HU: Horizontal Uncertainty Range

Bit value 0 High Accuracy default uncertainty range used.

Bit value 1 High Accuracy Extended Uncertainty Range used.

VU: Vertical Uncertainty Range

Bit value 0 High Accuracy default uncertainty range used.

Bit value 1 High Accuracy Extended Uncertainty Range used.

NOTE: Horizontal and vertical accuracy are coded as specified by "High Accuracy Uncertainty" (defined in clause 6.2a) or "High Accuracy Extended Uncertainty" (defined in clause 6.2b). Different coding can be used for horizontal and vertical location components.

### 7.3.7 Ellipsoid Arc

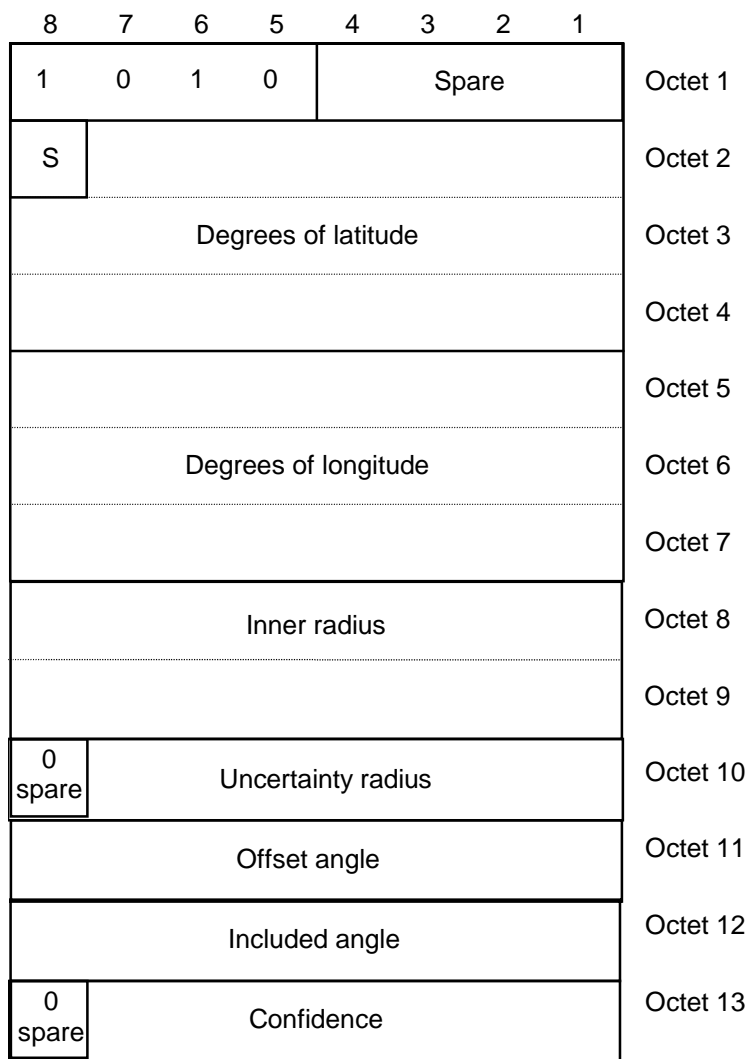


Figure 10: Shape description of an Ellipsoid arc

Inner radius:

Bit 8 of octet 8 is the high order bit.



Bit 1 of octet 9 is the low order bit.

## 8 Description of Velocity

A description of velocity is applicable to any target entity on or close to the surface of the WGS84 ellipsoid.

### 8.1 Horizontal Velocity

Horizontal velocity is characterised by the horizontal speed and bearing. The horizontal speed gives the magnitude of the horizontal component of the velocity of a target entity. The bearing provides the direction of the horizontal component of velocity taken clockwise from North.

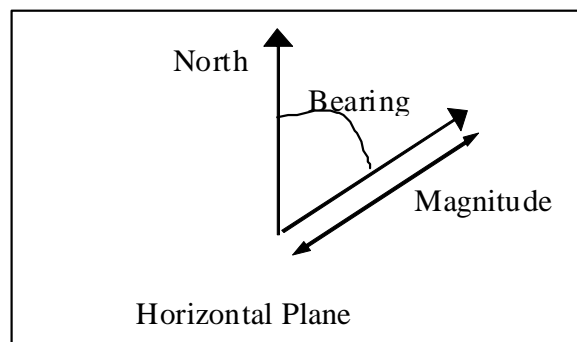


Figure 11: Description of Horizontal Velocity with Uncertainty

### 8.2 Horizontal and Vertical Velocity

Horizontal and vertical velocity is characterised by horizontal speed, bearing, vertical speed and direction. The horizontal speed and bearing characterise the horizontal component of velocity. The vertical speed and direction provides the component of velocity of a target entity in a vertical direction.

### 8.3 Horizontal Velocity with Uncertainty

Horizontal velocity with uncertainty is characterised by a horizontal speed and bearing, giving a horizontal velocity vector  $\underline{V}$ , and an uncertainty speed  $s$ . It describes the set of velocity vectors  $\underline{v}$  related to the given velocity  $\underline{V}$  as follows:

$$|\underline{v} - \underline{V}| \leq s$$

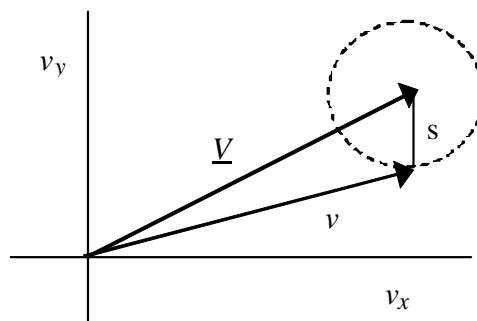


Figure 12: Description of Horizontal Velocity with Uncertainty

### 8.4 Horizontal and Vertical Velocity with Uncertainty

Horizontal and vertical velocity with uncertainty is characterised by a horizontal speed and bearing, giving a horizontal velocity vector  $\underline{V}_{x,y}$ , a vertical speed and direction giving a vertical velocity component  $V_z$ , and uncertainty speeds  $s_1$  and

s2. It describes the set of velocity vectors  $\underline{v}$  with horizontal and vertical components  $\underline{v}_{x,y}$ , and  $v_z$  that are related to the given velocity components  $\underline{V}_{x,y}$ , and  $V_z$  as follows:

$$|\underline{v}_{x,y} - \underline{V}_{x,y}| \leq s1$$

$$|v_z - V_z| \leq s2$$

### 8.4a Relative Velocity with Uncertainty

The relative velocity with uncertainty of a device B relative to a device A is characterised by a radial velocity component and a perpendicular transverse velocity component. The radial velocity component is characterized by a rate of change of a range between the device A and device B. The transverse velocity component is characterized by a rate of change of a direction to the device B from the device A, where the direction includes an angle of azimuth measured clockwise from North in a horizontal plane through the device A and an angle of elevation measured upwards or downwards in a vertical plane through the devices A and B from a horizontal plane through the device A. The rates of change of the range and the angles of azimuth and elevation can be each independently included or excluded in the relative velocity and each has an uncertainty and a confidence,

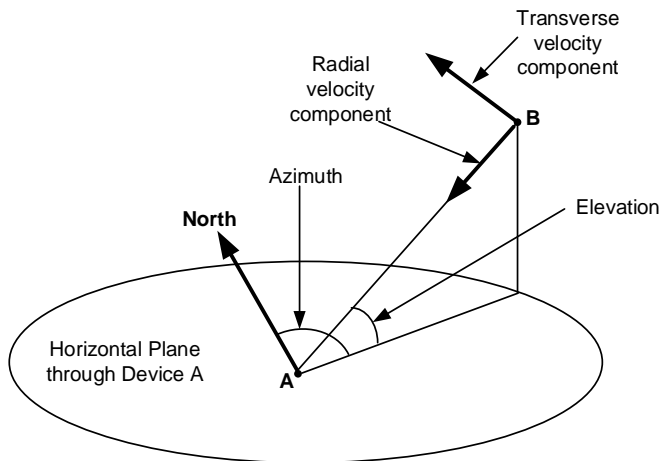


Figure 12a: Description of a Relative Velocity with Uncertainty

### 8.5 Coding Principles

Velocity is encoded as shown in Figure 13. The velocity type in bits 8-5 of octet 1 defines the type of velocity information in succeeding bits.

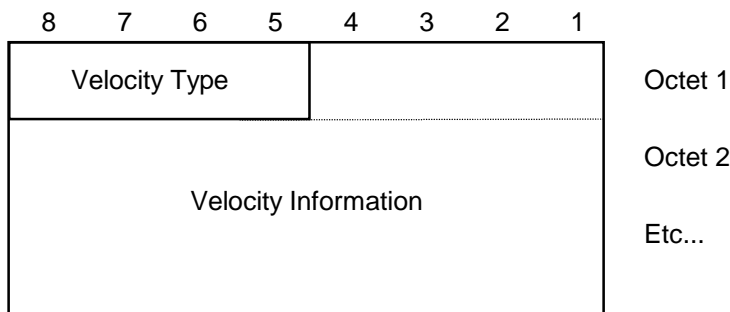


Figure 13: General Coding of Velocity

### 8.6 Coding of Velocity Type

Table 3 shows the coding of the velocity type.

**Table 3: Coding of Velocity Type**

Bits	
4 3 2 1	
0 0 0 0	Horizontal Velocity
0 0 0 1	Horizontal with Vertical Velocity
0 0 1 0	Horizontal Velocity with Uncertainty
0 0 1 1	Horizontal with Vertical Velocity and Uncertainty
other values	reserved for future use

## 8.7 Coding of Horizontal Speed

Horizontal speed is encoded in increments of 1 kilometre per hour using a 16 bit binary coded number  $N$ . The relation between the number  $N$  and the horizontal speed  $h$  (in kilometres per hour) it encodes is described by the following equations:

$$N \leq h < N + 0.5 \quad (N = 0)$$

$$N - 0.5 \leq h < N + 0.5 \quad (0 < N < 216-1)$$

$$N - 0.5 \leq h \quad (N = 216-1)$$

## 8.8 Coding of Bearing

Bearing is encoded in increments of 1 degree measured clockwise from North using a 9 bit binary coded number  $N$ . The relation between the number  $N$  and the bearing  $b$  (in degrees) it encodes is described by the following equation:

$$N \leq b < N+1$$

except for  $360 \leq N < 511$  which are not used.

## 8.9 Coding of Vertical Speed

Vertical speed is encoded in increments of 1 kilometre per hour using 8 bits giving a number  $N$  between 0 and  $2^8-1$ . The relation between the number  $N$  and the vertical speed  $v$  (in kilometres per hour) it encodes is described by the following equations:

$$N \leq v < N + 0.5 \quad (N = 0)$$

$$N - 0.5 \leq v < N + 0.5 \quad (0 < N < 2^8-1)$$

$$N - 0.5 \leq v \quad (N = 2^8-1)$$

## 8.10 Coding of Vertical Speed Direction


Vertical speed direction is encoded using 1 bit: a bit value of 0 indicates upward speed; a bit value of 1 indicates downward speed.

## 8.11 Coding of Uncertainty Speed

Uncertainty speed is encoded in increments of 1 kilometre per hour using an 8 bit binary coded number  $N$ . The value of  $N$  gives the uncertainty speed except for  $N=255$  which indicates that the uncertainty is not specified.

## 8.12 Coding of Horizontal Velocity

The coding of horizontal velocity is described in figure 14.

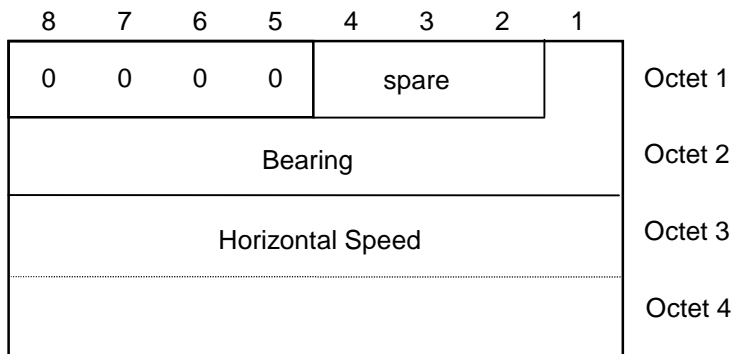

**Figure 14: Coding of Horizontal Velocity**

Bearing


Bit 1 of octet 1 is the high order bit; bit 1 of octet 2 is the low order bit

Horizontal Speed

Bit 1 of octet 4 is the low order bit

## 8.13 Coding of Horizontal with Vertical Velocity

The coding of horizontal with vertical velocity is described in figure 15.

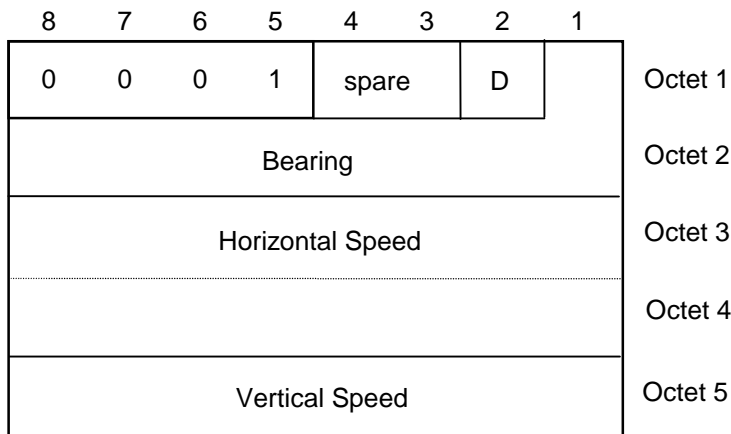

**Figure 15: Coding of Horizontal with Vertical Velocity**

D: Direction of Vertical Speed

Bit value 0 Upward

Bit value 1 Downward

## 8.14 Coding of Horizontal Velocity with Uncertainty

The coding of horizontal velocity with uncertainty is described in figure 16.

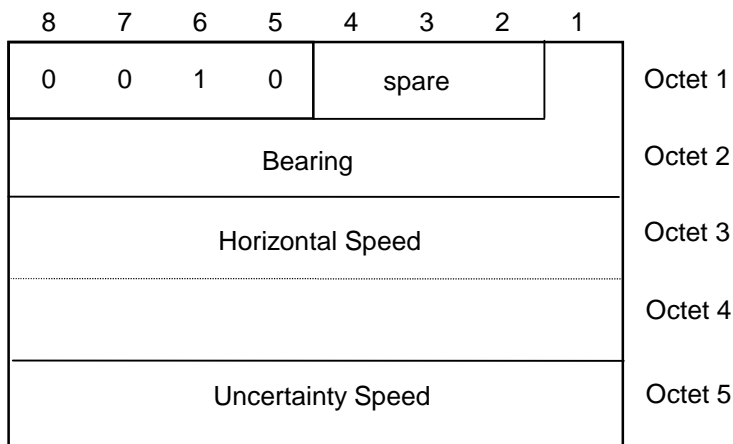


Figure 16: Coding of Horizontal Velocity with Uncertainty

### 8.15 Coding of Horizontal with Vertical Velocity and Uncertainty

The coding of horizontal with vertical velocity and uncertainty is described in figure 17.

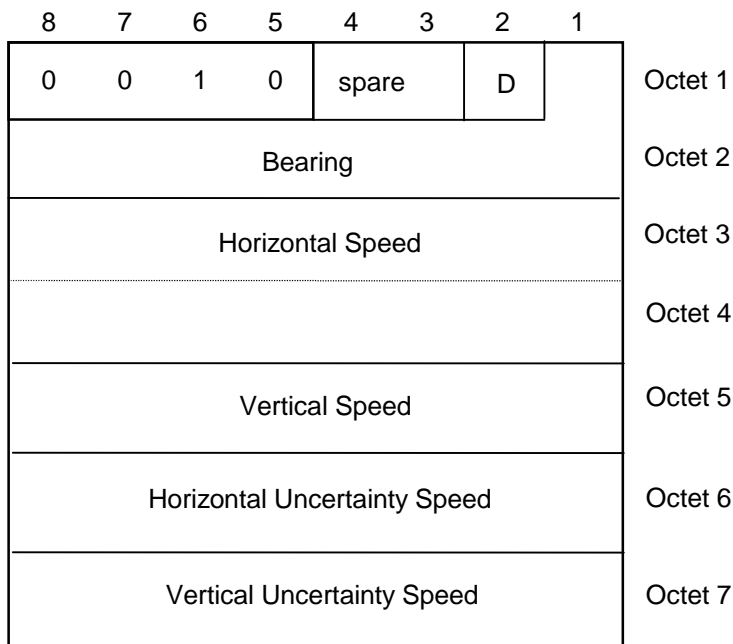


Figure 17: Coding of Horizontal with Vertical Velocity and Uncertainty

## Annex A (informative): Element description in compact notation

The notation is the one described in GSM 04.07 [2].

```

<Geographical Area Description> ::=
    <Point> |
    <Point with uncertainty circle > |
    <Point with uncertainty ellipse> |
    <Polygon> |
    <Point with Altitude> |
    <Point with altitude and uncertainty ellipsoid> |
    <Arc>;

<Point> ::=
    0000 <spare>(4)
    <Point horizontal co-ordinates> ;

<point horizontal co-ordinates> ::=
    <Latitude sign : bit> <Unsigned latitude : bit string(23)>
    <Longitude : bit string(24)> ;

<Point with uncertainty circle > ::=
    0001 <spare>(4)
    <Point horizontal co-ordinates>
    <spare bit> <Uncertainty: bit string(7)> ;

<Point with uncertainty ellipse> ::=
    0011 <spare>(4)
    <Point co-ordinates>
    <spare bit> <Uncertainty semi-major: bit string(7)>
    <spare bit> <Uncertainty semi-minor: bit string(7)>
    <Orientation of major axis: bit string(8)>
    <spare bit> <Confidence: bit string(7)>;

<Polygon> ::=
    0101 <Number of points>
    <Point co-ordinates>(val(Number of points)) ;

<Number of points> ::=
    0011 | 0100 | 0101 | 0110 | 0111 | 1000 | 1001 | 1010 |
    1011 | 1100 | 1101 | 1110 | 1111 ;

<Point with Altitude> ::=
    1000 <spare>(4)
    <Point horizontal co-ordinates>
    <Point vertical co-ordinate>;

<point vertical co-ordinate> ::=
    <sign : bit> <Unsigned altitude : bit string(15)>

<Point with altitude and uncertainty ellipsoid> ::=
    1001 <spare>(4)
    <Point horizontal co-ordinates>
    <point vertical co-ordinate>
    <spare bit> <Uncertainty semi-major: bit string(7)>
    <spare bit> <Uncertainty semi-minor: bit string(7)>
    <Orientation of major axis: bit string(8)>
  
```

```
<spare bit> <Uncertainty altitude: bit string(7)>  
<spare bit> <Confidence: bit string(7)>;
```

```
<Ellipsoid Arc> ::=
```

```
<1010> spare(4)  
<Point horizontal co-ordinates>  
<Inner radius: bit string(16)>  
<Spare bit> <Uncertainty radius: bit string(7)>;  
<Offset angle: bit string(8)>  
  
<Included angle: bit string(8)>  
<spare bit> <Confidence: bit string(7)>;
```

```
<Velocity Description> ::=
```

```
<Horizontal Velocity> |  
<Horizontal and Vertical Velocity> |  
<Horizontal Velocity with Uncertainty> |  
<Horizontal and Vertical Velocity with Uncertainty>;
```

```
<Horizontal Velocity> : :=
```

```
0000 <spare>(3)  
<Bearing: bit string(9)>  
<Horizontal speed: bit string(16)>;
```

```
<Horizontal and Vertical Velocity> : :=
```

```
0001 <spare>(2)  
<Vertical direction : bit>  
<Bearing: bit string(9)>  
<Horizontal speed: bit string(16)>  
<Vertical speed: bit string(8)>;
```

```
<Horizontal Velocity with Uncertainty> : :=
```

```
0010 <spare>(3)  
<Bearing: bit string(9)>  
<Horizontal speed: bit string(16)>  
<Uncertainty Speed: bit string(8)>;
```

```
<Horizontal and Vertical Velocity with Uncertainty> : :=
```

```
0011 <spare>(2)  
<Vertical direction : bit>  
<Bearing: bit string(9)>  
<Horizontal speed: bit string(16)>  
<Vertical speed: bit string(8)>  
<Horizontal Uncertainty Speed: bit string(8)>  
<Vertical Uncertainty Speed: bit string(8)>;
```

## Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2004-12	SP-26					Created version 6.0.0	6.0.0
2007-06	SP-36	-	-	-		Update to Rel-7 version (MCC)	7.0.0
2008-12	SP-42	-	-	-		Update to Rel-8 version (MCC)	8.0.0
2009-12	SP-46	-	-	-		Update to Rel-9 version (MCC)	9.0.0
2011-03	SP-51	-	-	-	-	Update to Rel-10 version (MCC)	10.0.0
2012-09	-	-	-	-	-	Update to Rel-11 version (MCC)	11.0.0
2014-09	SP-65	-	-	-	-	Update to Rel-12 version (MCC)	12.0.0
2015-12	-	-	-	-	-	Update to Rel-13 version (MCC)	13.0.0
2017-03	-	-	-	-	-	Update to Rel-14 version (MCC)	14.0.0
2018-03	SP-79	SP-180089	0014	-	F	Correction to the speed encoding	14.1.0
2018-06	SP-80	-	-	-		Update to Rel-15 version (MCC)	15.0.0
2018-09	SP-81	SP-180729	0015	1	F	GAD shape(s) for high accuracy positioning	15.1.0
2020-07	SP-88E	-	-	-	-	Update to Rel-16 version (MCC)	16.0.0
2021-03	SP-91E	SP-210063	0018	1	C	GAD shape for location estimate in Local Coordinates	17.0.0
2021-09	SP-93E	SP-210913	0019	1	F	Add message formats for Local 2D point with uncertainty ellipse and Local 3D point with uncertainty ellipsoid	17.1.0
2021-12	SP-94E	SP-211279	0021	1	A	Introducing new high accuracy GAD shape with scalable uncertainty	17.2.0
2023-06	SP-100	SP-230485	0022	1	B	New GAD Shapes for Ranging and Sidelink Positioning Location Results	18.0.0
2023-09	SP-101	SP-230855	0025	-	F	Remove Editor's Note on feasibility of the Relative Velocity with Uncertainty shape	18.1.0



---

# History

<b>Document history</b>		
V18.1.0	May 2024	Publication