

ETSI TS 124 368 V19.3.0 (2026-01)



TECHNICAL SPECIFICATION

**Universal Mobile Telecommunications System (UMTS);
LTE;
5G;
Non-Access Stratum (NAS)
configuration Management Object (MO)
(3GPP TS 24.368 version 19.3.0 Release 19)**



A GLOBAL INITIATIVE

Reference

RTS/TSGC-0124368vj30

Keywords

5G,LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards application](#).

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver repository](#).

Users should be aware that the present document may be revised or have its status changed, this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our [Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2026.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

| | |
|--|----|
| Intellectual Property Rights | 2 |
| Legal Notice | 2 |
| Modal verbs terminology..... | 2 |
| Foreword..... | 6 |
| 1 Scope | 7 |
| 2 References | 7 |
| 3 Definitions, symbols and abbreviations | 8 |
| 3.1 Definitions | 8 |
| 3.2 Abbreviations | 8 |
| 4 NAS configuration MO..... | 8 |
| 5 NAS configuration MO parameters | 12 |
| 5.1 General | 12 |
| 5.2 Node: <X> | 12 |
| 5.3 <X>/NAS_SignallingPriority | 12 |
| 5.4 <X>/AttachWithIMSI | 13 |
| 5.5 <X>/MinimumPeriodicSearchTimer | 13 |
| 5.6 <X>/NMO_I_Behaviour..... | 13 |
| 5.7 <X>/Timer_T3245_Behaviour | 14 |
| 5.8 <X>/ExtendedAccessBarring | 14 |
| 5.9 <X>/Override_NAS_SignallingLowPriority | 14 |
| 5.10 <X>/Override_ExtendedAccessBarring | 15 |
| 5.10a <X>/FastFirstHigherPriorityPLMNSearch..... | 15 |
| 5.10b <X>/EUTRADisablingAllowedForEMMCause15..... | 15 |
| 5.10c <X>/SM_RetryWaitTime | 16 |
| 5.10d <X>/SM_RetryAtRATChange | 16 |
| 5.10e <X>/Default_DCN_ID | 16 |
| 5.10f /<X>/3GPP_PS_data_off..... | 17 |
| 5.10g /<X>/3GPP_PS_data_off/Exempted_service_list..... | 17 |
| 5.10h Void..... | 17 |
| 5.10i /<X>/3GPP_PS_data_off/Exempted_service_list/Device_management_over_PS..... | 17 |
| 5.10j /<X>/3GPP_PS_data_off/Exempted_service_list/Bearer_independent_protocol..... | 17 |
| 5.10ja /<X>/3GPP_PS_data_off/Exempted_service_list/Location_services_over_LCS_UPP..... | 18 |
| 5.10k <X>/ExceptionDataReportingAllowed..... | 18 |
| 5.10l /<X>/3GPP_PS_data_off/Exempted_service_list_roaming | 19 |
| 5.10m /<X>/3GPP_PS_data_off/Exempted_service_list_roaming/Device_management_over_PS | 19 |
| 5.10n /<X>/3GPP_PS_data_off/Exempted_service_list_roaming/Bearer_independent_protocol..... | 19 |
| 5.10na /<X>/3GPP_PS_data_off/Exempted_service_list_roaming/Location_services_over_LCS_UPP..... | 20 |
| 5.10nb /<X>/3GPP_PS_data_off/Exempted_service_list_non-subscribed_SNPN | 20 |
| 5.10nc /<X>/3GPP_PS_data_off/Exempted_service_list_non-subscribed_SNPN/Device_management_over_PS..... | 20 |
| 5.10nd /<X>/3GPP_PS_data_off/Exempted_service_list_non-subscribed_SNPN/Bearer_independent_protocol..... | 21 |
| 5.10ne /<X>/3GPP_PS_data_off/Exempted_service_list_non-subscribed_SNPN/Location_services_over_LCS_UPP..... | 21 |
| 5.10o /<X>/EARFCNList..... | 21 |
| 5.10p /<X>/EARFCNList/<X> | 21 |
| 5.10q /<X>/EARFCNList/<X>/EARFCN..... | 22 |
| 5.10r /<X>/EARFCNList/<X>/GeographicalArea | 22 |
| 5.10s /<X>/EARFCNList/<X>/GeographicalArea/Polygon..... | 22 |
| 5.10t /<X>/EARFCNList/<X>/GeographicalArea/Polygon/<X>..... | 22 |
| 5.10u /<X>/EARFCNList/<X>/GeographicalArea/Polygon/<X>/ Coordinates | 23 |
| 5.10v /<X>/EARFCNList/<X>/GeographicalArea/Polygon/<X>/ Coordinates/<X>..... | 23 |
| 5.10w /<X>/EARFCNList/<X>/GeographicalArea/Polygon/<X>/ Coordinates/<X>/Latitude | 23 |
| 5.10x /<X>/EARFCNList/<X>/GeographicalArea/Polygon/<X>/ Coordinates/<X>/Longitude | 23 |

| | | |
|-------------------------------|--|-----------|
| 5.10y | /<X>/RLOSPreferredPLMNList..... | 24 |
| 5.10z | /<X>/RLOSPreferredPLMNList/<X> | 24 |
| 5.10za | /<X>/RLOSPreferredPLMNList/<X>/PLMN | 24 |
| 5.10zb | /<X>/RLOSPreferredPLMNList/<X>/PLMNPriority | 24 |
| 5.10zc | /<X>/MfgAssignUERadioCapId | 25 |
| 5.10zca | /<X>/MfgAssignUERadioCapId/VendorID | 25 |
| 5.10zd | /<X>/MfgAssignUERadioCapId/<X> | 25 |
| 5.10ze | /<X>/MfgAssignUERadioCapId/<X>/RCI | 25 |
| 5.10zf | /<X>/MfgAssignUERadioCapId/<X>/UERadioConfigLTE..... | 25 |
| 5.10zg | /<X>/MfgAssignUERadioCapId/<X>/UERadioConfigNR..... | 26 |
| 5.10zh | /<X>/RLOSAAllowedMCCList..... | 26 |
| 5.10zi | /<X>/RLOSAAllowedMCCList/<X> | 26 |
| 5.10zj | /<X>/RLOSAAllowedMCCList/<X>/MCC..... | 26 |
| 5.10zk | /<X>/SNPN_Configuration | 27 |
| 5.10zl | /<X>/SNPN_Configuration/<X> | 27 |
| 5.10zm | /<X>/SNPN_Configuration/<X>/SNPN_identifier | 27 |
| 5.10zn | /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off..... | 27 |
| 5.10zo | /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/Exempted_service_list..... | 28 |
| 5.10zp | /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/ Exempted_service_list/Device_management_over_PS..... | 28 |
| 5.10zq | /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/ Exempted_service_list/Bearer_independent_protocol | 28 |
| 5.10zq1 | /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/ Exempted_service_list/Location_services_over_LCS_UPP | 29 |
| 5.10zr | <X>/SNPN_Configuration/<X>/SM_RetryWaitTime | 29 |
| 5.10zs | <X>/SNPN_Configuration/<X>/Timer_T3245_Behaviour | 29 |
| 5.10zt | /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/ Exempted_service_list_non_subscribed_SNPN..... | 30 |
| 5.10zu | /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/ Exempted_service_list_non_subscribed_SNPN/ Device_management_over_PS..... | 30 |
| 5.10zv | /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/ Exempted_service_list_non_subscribed_SNPN/ Bearer_independent_protocol..... | 30 |
| 5.10zv1 | /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/ Exempted_service_list_non_subscribed_SNPN/ Location_services_over_LCS_UPP | 31 |
| 5.10zw | <X>/NoEUTRADisablingIn5GS | 31 |
| 5.10zx | /<X>/ Re_enable_N1_upon_reattach..... | 31 |
| 5.10zy | /<X>/CustomLLFailureRetry | 32 |
| 5.10zz | /<X>/ CustomLLFailureRetry/MinRetryTimer | 32 |
| 5.10zz1 | /<X>/ CustomLLFailureRetry/MaxRetryTimer..... | 32 |
| 5.10zz2 | /<X>/ CustomLLFailureRetry/MaxMinRetry..... | 32 |
| 5.10zz3 | /<X>/UE_using_SENSE..... | 32 |
| 5.10zz4 | /<X>/DefaultNSSAIInclusionMode | 33 |
| 5.10zz5 | /<X>/MPS_NAIDecoration | 33 |
| 5.10zz6 | /<X>/HPA_NAIDecoration | 33 |
| 5.10zz7 | /<X>/SNPN_Configuration/<X>/MPS_NAIDecoration..... | 34 |
| 5.10zz8 | /<X>/SNPN_Configuration/<X>/HPA_NAIDecoration..... | 34 |
| 5.10zz9 | /<X>/Satellite_Disabling_Allowed_for_5GMM_cause_#15 | 34 |
| 5.10zz10 | /<X>/Satellite_Disabling_Allowed_for_EMM_cause_#15..... | 35 |
| 5.10zz11 | /<X>/CustomLLFailureRetry5G..... | 35 |
| 5.10zz12 | /<X>/ CustomLLFailureRetry5G/MinRetryTimer | 35 |
| 5.10zz13 | /<X>/ CustomLLFailureRetry5G/MaxRetryTimer..... | 35 |
| 5.10zz14 | /<X>/ CustomLLFailureRetry5G/MaxMinRetry..... | 36 |
| 5.10zz15 | /<X>/FasterRecovery..... | 36 |
| 5.10zz16 | /<X>/FasterRecovery/MaxNumShortTimerStop | 36 |
| 5.10zz17 | /<X>/FasterRecovery/MaxNumLongTimerReg..... | 36 |
| 5.10zz18 | /<X>/FasterRecovery/ShortTimerEvent | 36 |
| 5.10zz19 | /<X>/FasterRecovery/LongTimerEvent | 37 |
| 5.10zz20 | /<X>/FasterRecovery/AccessTechnology | 37 |
| 5.11 | <X>/Ext..... | 37 |
| Annex A (informative): | NAS configuration MO DDF | 39 |
| Annex B (informative): | Change history | 64 |

History66

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document defines a Management Object (MO) that can be used to configure the UE with parameters related to Non-Access Stratum (NAS) functionality.

The MO is compatible with the OMA Device Management (DM) protocol specifications, version 1.2 and upwards, and is defined using the OMA DM Device Description Framework (DDF) as described in the Enabler Release Definition OMA-ERELED-DM-V1_2 [2].

The MO consists of relevant parameters for NAS related configuration of a UE.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] OMA-ERELED-DM-V1_2: "Enabler Release Definition for OMA Device Management".
- [3] 3GPP TS 23.122: "Non-Access-Stratum (NAS) functions related to Mobile Station (MS) in idle mode".
- [4] 3GPP TS 24.008: "Mobile radio interface Layer 3 specification; Core network protocols; Stage 3".
- [5] 3GPP TS 24.301: "Non-Access-Stratum (NAS) protocol for Evolved Packet System (EPS); Stage 3".
- [5A] 3GPP TS 23.401: "GPRS enhancements for E-UTRAN access".
- [6] 3GPP TS 31.102: "Characteristics of the USIM Application".
- [7] 3GPP TS 31.111: "Universal Subscriber Identity Module (USIM) Application Toolkit (USAT)".
- [8] 3GPP TS 36.101: "Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception".
- [9] 3GPP TS 23.032: "Universal Geographical Area Description (GAD)".
- [10] 3GPP TS 36.304: "Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) procedures in idle mode".
- [11] 3GPP TS 24.501: "Non-Access-Stratum (NAS) protocol for 5G System (5GS); Stage 3".
- [12] 3GPP TS 23.221: "Architectural requirements".
- [13] 3GPP TS 23.003: "Numbering, addressing and identification".
- [14] 3GPP TS 36.331: "Evolved Universal Terrestrial Radio Access (E-UTRA); Radio Resource Control (RRC) protocol specification".
- [15] 3GPP TS 38.331: "NR; Radio Resource Control (RRC); Protocol Specification".
- [16] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] apply.

Reserved: The value "reserved" is assigned to a code point to indicate that it is reserved for future use. The present document specifies no processing rules for handling of "reserved" value by the receiving entity.

For the purposes of the present document, the following terms and definitions given in 3GPP TS 23.122 [6] apply:

EHPLMN
HPLMN
VPLMN

For the purposes of the present document, the following terms and definitions given in 3GPP TS 23.501 [16] apply:

Stand-alone Non-Public Network

For the purposes of the present document, the following terms and definitions given in 3GPP TS 24.301 [5] apply:

In NB-S1 mode

For the purposes of the present document, the following terms and definitions given in 3GPP TS 23.221 [12] apply:

Restricted Local Operator Services

For the purposes of the present document, the following terms and definitions given in 3GPP TS 24.501 [11] apply:

SNPN access operation mode
NSSAI inclusion mode

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

| | |
|--------|--|
| ACL | Access Control List |
| DDF | Device Description Framework |
| DM | Device Management |
| EARFCN | E-UTRA Absolute Radio Frequency Channel Number |
| HPA | High Priority Access |
| MO | Management Object |
| MPS | Multimedia Priority Service |
| MTC | Machine-Type Communications |
| NAS | Non-Access Stratum |
| NB-IoT | Narrowband IoT |
| NID | Network Identifier |
| OMA | Open Mobile Alliance |
| RLOS | Restricted Local Operator Services |
| SENSE | Signal level Enhanced Network Selection |
| SNPN | Stand-alone Non-Public Network |

4 NAS configuration MO

The NAS configuration MO is used to manage configuration parameters related to NAS functionality for a UE supporting provisioning of such information. The presence and format of the non-access stratum configuration file on the USIM is specified in 3GPP TS 31.102 [6].

The MO identifier is: urn:oma:mo:ext-3gpp-nas-config:1.0.

The OMA DM Access Control List (ACL) property mechanism (see OMA-ERELED-DM-V1_2 [2]) may be used to grant or deny access rights to OMA DM servers in order to modify nodes and leaf objects of the NAS configuration MO.

The following nodes and leaf objects are possible in the NAS configuration MO as described in figure 4-1:

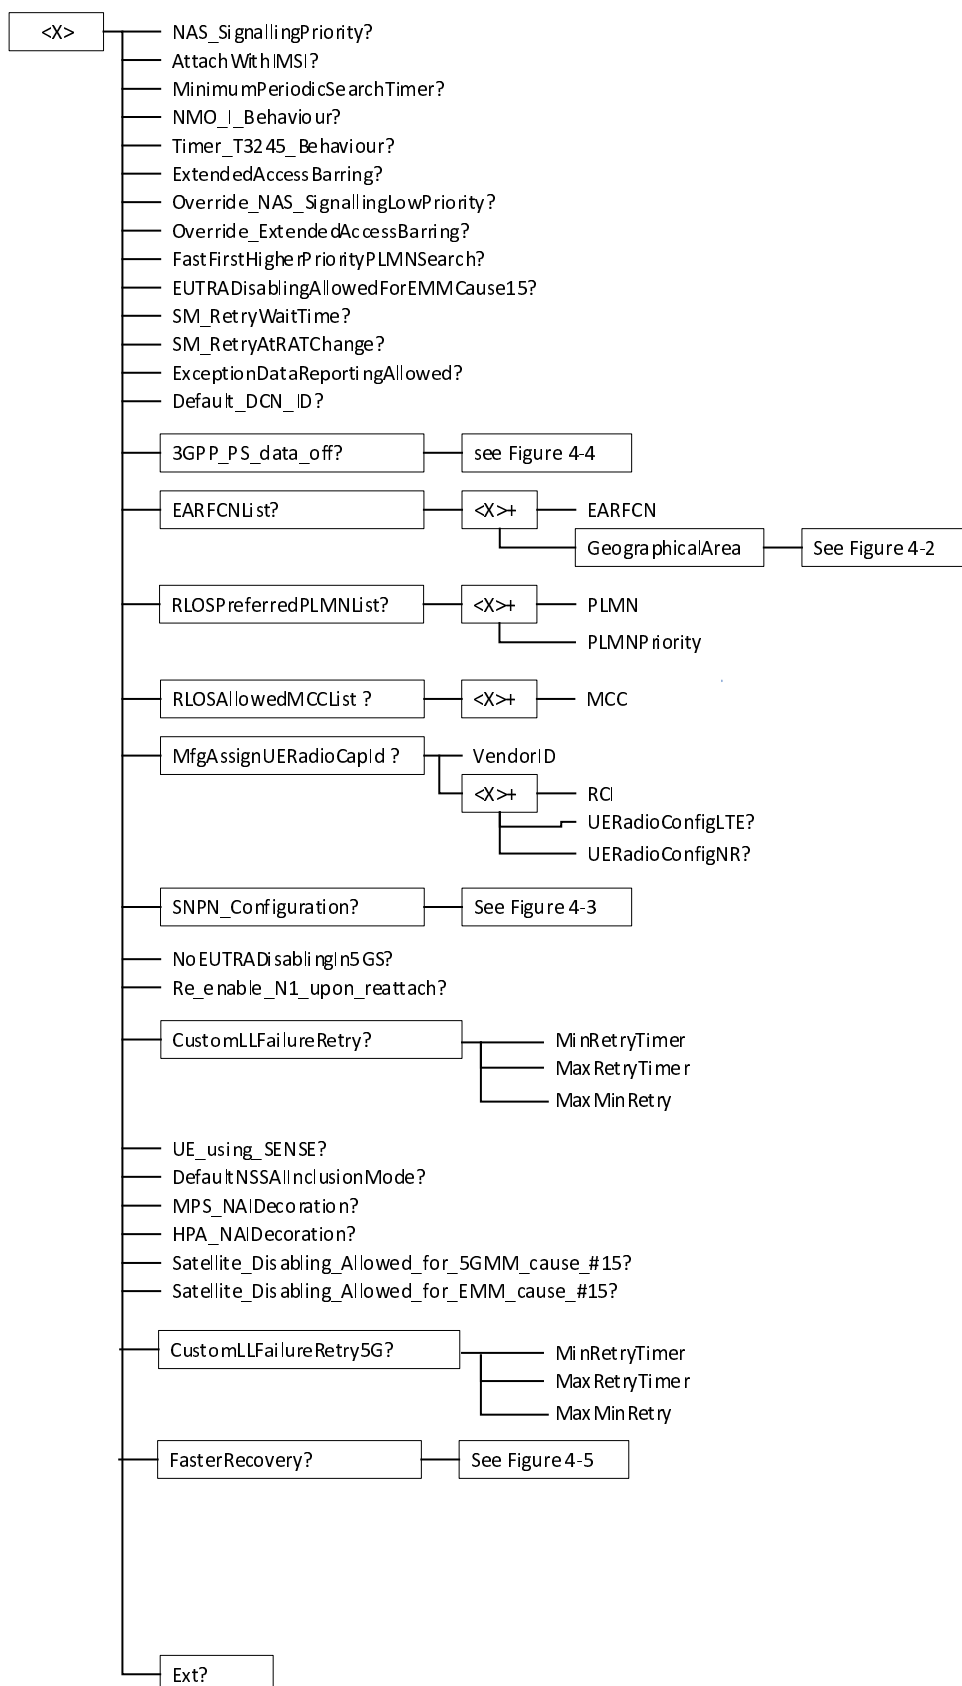


Figure 4-1: The NAS configuration Management Object (1 of 5)




Figure 4-2: The NAS configuration Management Object (2 of 5)

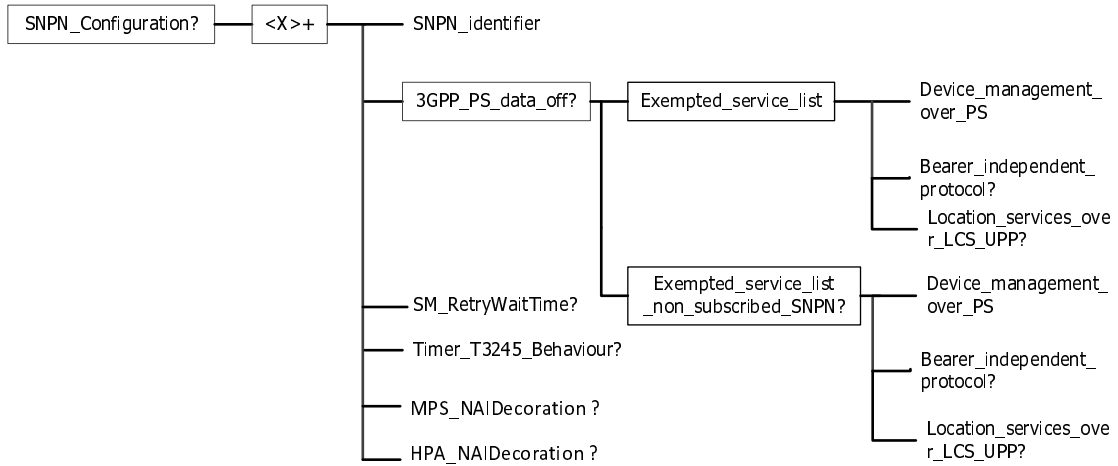


Figure 4-3: The NAS configuration Management Object (3 of 5)

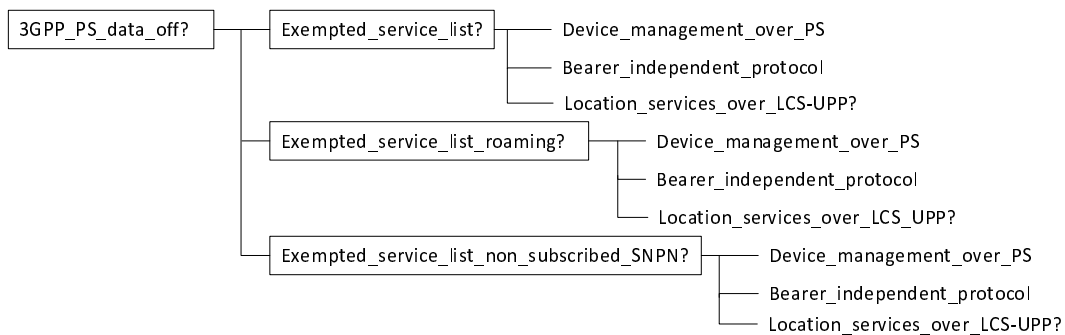


Figure 4-4: The NAS configuration Management Object (4 of 5)

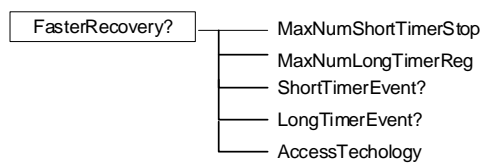


Figure 4-5: The NAS configuration Management Object (5 of 5)

5 NAS configuration MO parameters

5.1 General

This clause describes the parameters for the NAS configuration MO.

5.2 Node: <X>

This interior node acts as a placeholder for zero or one accounts for a fixed node.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get
- Values: N/A

5.3 <X>/NAS_SignallingPriority

The NAS_SignallingPriority leaf indicates a NAS signalling priority which is used to determine the setting of the low priority indicator to be included in NAS messages as specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne
- Format: int
- Access Types: Get, Replace
- Values: <NAS signalling priority>

Possible values for the NAS signalling priority are specified in table 5.3.1.

Table 5.3.1: Values of NAS_SignallingPriority leaf

| Value | Description |
|-------|-----------------------------|
| 0 | Reserved |
| 1 | NAS signalling low priority |
| 2-255 | Reserved |

5.4 <X>/AttachWithIMSI

The AttachWithIMSI leaf indicates whether attach with IMSI is performed when moving to a non-equivalent PLMN as specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 Indicates that normal behaviour is applied.
 - 1 Indicates that attach with IMSI is performed when moving to a non-equivalent PLMN.

The default value 0 applies if this leaf is not provisioned.

5.5 <X>/MinimumPeriodicSearchTimer

The MinimumPeriodicSearchTimer leaf gives a minimum value in minutes for the timer T controlling the periodic search for higher prioritized PLMNs as specified in 3GPP TS 23.122 [3].

- Occurrence: ZeroOrOne
- Format: int
- Access Types: Get, Replace
- Values: 0-255

The default value 0 applies if this leaf is not provisioned.

5.6 <X>/NMO_I_Behaviour

The NMO_I_Behaviour leaf indicates whether the "NMO I, Network Mode of Operation I" indication as specified in 3GPP TS 24.008 [4] is applied by the UE.

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 Indicates that the "NMO I, Network Mode of Operation I" indication is not used.
 - 1 Indicates that the "NMO I, Network Mode of Operation I" indication is used, if available.

The default value 0 applies if this leaf is not provisioned.

5.7 <X>/Timer_T3245_Behaviour

The Timer_T3245_Behaviour leaf indicates whether the timer T3245 and the related functionality as specified in 3GPP TS 24.008 [4], 3GPP TS 24.301 [5], and 3GPP TS 24.501 [11] is used by the UE.

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 Indicates that the timer T3245 is not used.
 - 1 Indicates that the timer T3245 is used.

The default value 0 applies if this leaf is not provisioned.

5.8 <X>/ExtendedAccessBarring

The ExtendedAccessBarring leaf indicates whether the extended access barring is applicable for the UE as specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 Indicates that the extended access barring is not applied for the UE.
 - 1 Indicates that the extended access barring is applied for the UE.

The default value 0 applies if this leaf is not provisioned.

5.9 <X>/Override_NAS_SignallingLowPriority

The Override_NAS_SignallingLowPriority leaf indicates whether the UE can override the NAS_SignallingPriority leaf node configured to NAS signalling low priority.

The setting of the low priority indicator included in NAS messages when the Override_NAS_SignallingPriority leaf exists is specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 Indicates that the UE cannot override the NAS signalling low priority indicator
 - 1 Indicates that the UE can override the NAS signalling low priority indicator

The default value 0 applies if this leaf is not provisioned.

If provisioned, this leaf is set to the same value as that provisioned for the Override_ExtendedAccessBarring leaf, e.g., if the UE is configured to override the NAS signalling low access priority indicator, then UE is also configured to override extended access class barring (see 3GPP TS 23.401 [5A]).

5.10 <X>/Override_ExtendedAccessBarring

The `Override_ExtendedAccessBarring` leaf indicates whether the UE can override `ExtendedAccessBarring` leaf node configured to extended access barring.

The handling of extended access barring for the UE when the `Override_ExtendedAccessBarring` leaf exists is specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 Indicates that the UE cannot override extended access barring
- 1 Indicates that the UE can override extended access barring

The default value 0 applies if this leaf is not provisioned.

If provisioned, this leaf is set to the same value as that provisioned for the `Override_NAS_SignallingLowPriority` leaf, e.g., if the UE is configured to override the NAS signalling low access priority indicator, then UE is also configured to override extended access class barring (see 3GPP TS 23.401 [5A]).

5.10a <X>/FastFirstHigherPriorityPLMNSearch

The `FastFirstHigherPriorityPLMNSearch` leaf indicates whether the UE performs the first search for a higher priority PLMN after at least 2 minutes and at most T minutes upon entering a VPLMN as specified in 3GPP TS 23.122 [3].

- Occurrence: ZeroOrOne
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 Indicates that the Fast First Higher Priority PLMN Search is disabled, see 3GPP TS 23.122 [3]
- 1 Indicates that the Fast First Higher Priority PLMN Search is enabled, see 3GPP TS 23.122 [3]

The default value 0 applies if this leaf is not provisioned.

5.10b <X>/EUTRADisablingAllowedForEMMCause15

The `EUTRADisablingAllowedForEMMCause15` leaf indicates whether the UE is allowed to disable the E-UTRA capability when it receives the Extended EMM cause IE with value "E-UTRAN not allowed" as described in 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 Indicates that "E-UTRA Disabling for EMM cause #15" is disabled, see 3GPP TS 24.301 [5]
- 1 Indicates that "E-UTRA Disabling for EMM cause #15" is enabled, see 3GPP TS 24.301 [5]

The default value 0 applies if this leaf is not provisioned.

5.10c <X>/SM_RetryWaitTime

The SM_RetryWaitTime leaf indicates a configured UE retry wait time value applicable when in HPLMN or EHPLMN (see 3GPP TS 23.122 [3]) for controlling the UE session management retry behaviour when prior session management request was rejected by the network with cause value #8, #27, #32, #33 as specified in 3GPP TS 24.008 [4] and 3GPP TS 24.301 [5], or when prior session management request was rejected by the network with cause value #8, #27, #32, #33, #70 as specified in 3GPP TS 24.501 [11].

- Occurrence: ZeroOrOne
- Format: int
- Access Types: Get, Replace
- Values: 0-255

The default value of 12 minutes applies if this leaf is not provisioned.

SM_RetryWaitTime shall be coded in the same format as the value part of GPRS Timer 3 IE as specified in Table 10.5.163a/3GPP TS 24.008 [4] converted into a decimal value.

5.10d <X>/SM_RetryAtRATChange

The SM_RetryAtRATChange leaf indicates the UE's retry behaviour when in HPLMN or EHPLMN (see 3GPP TS 23.122 [3]) after inter-system change between S1 mode and A/Gb or Iu mode or N1 mode as specified in 3GPP TS 24.008 [4], 3GPP TS 24.301 [5] and 3GPP TS 24.501 [11].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1

0 Indicates that the UE is allowed to retry the corresponding ESM procedure in S1 mode if an SM procedure was rejected in A/Gb or Iu mode or a 5GSM procedure was rejected in N1 mode, and to retry the corresponding SM procedure in A/Gb or Iu mode or the corresponding 5GSM procedure in N1 mode if an ESM procedure was rejected in S1 mode, see 3GPP TS 24.008 [4], 3GPP TS 24.301 [5] and 3GPP TS 24.501 [11]

1 Indicates that the UE is not allowed to retry an SM procedure or the corresponding ESM procedure or the corresponding 5GSM procedure in any of the modes: A/Gb, Iu, S1 and N1 mode, see 3GPP TS 24.008 [4], 3GPP TS 24.301 [5] and 3GPP TS 24.501 [11]

The default value 0 applies if this leaf is not provisioned.

5.10e <X>/Default_DCN_ID

The Default_DCN_ID leaf indicates the default DCN-ID.

- Occurrence: ZeroOrOne
- Format: int
- Access Types: Get, Replace
- Values: 0-65535

Default_DCN_ID shall be coded as DCN-ID as specified in 3GPP TS 23.003 [5], converted into a decimal value.

5.10f /<X>/3GPP_PS_data_off

The interior node contains configuration parameters for 3GPP PS data off.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10g /<X>/3GPP_PS_data_off/Exempted_service_list

The interior node contains one or more services which are exempted of 3GPP PS data off when the UE is in its HPLMN or EHPLMN. If the Exempted_service_list_roaming node is not present, this list is also used when the UE is in the VPLMN.

- Occurrence: One
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10h Void

5.10i

/<X>/3GPP_PS_data_off/Exempted_service_list/Device_management_over_PS

The Device_management_over_PS leaf indicates whether Device management over PS is a 3GPP PS data off exempt service when the UE is in its HPLMN or EHPLMN.

- Occurrence: One
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 - Indicates that the device management over PS is not a 3GPP PS data off exempt service when the UE is in its HPLMN or EHPLMN.
- 1 - Indicates that the device management over PS is a 3GPP PS data off exempt service when the UE is in its HPLMN or EHPLMN.

5.10j

/<X>/3GPP_PS_data_off/Exempted_service_list/Bearer_independent_protocol

The Bearer_independent_protocol leaf indicates whether Bearer independent protocol is a 3GPP PS data off exempt service when the UE is in its HPLMN or EHPLMN.

- Occurrence: One

- Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 - Indicates that the bearer independent protocol is not a 3GPP PS data off exempt service when the UE is in its HPLMN or EHPLMN (see 3GPP TS 31.111 [7]).
- 1 - Indicates that the bearer independent protocol is a 3GPP PS data off exempt service when the UE is in its HPLMN or EHPLMN (see 3GPP TS 31.111 [7]).

5.10ja

/<X>/3GPP_PS_data_off/Exempted_service_list/Location_services_over_LCS_UPP

The Location_services_over_LCS_UPP leaf indicates whether the location services over Location Services User Plane protocol (LCS-UPP) is a 3GPP PS data off exempt service when the UE is in its HPLMN or EHPLMN.

- Occurrence: ZeroOrOne
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 - Indicates that the location services over LCS-UPP is not a 3GPP PS data off exempt service when the UE is in its HPLMN or EHPLMN.
- 1 - Indicates that the location services over LCS-UPP is a 3GPP PS data off exempt service when the UE is in its HPLMN or EHPLMN.

The default value 0 applies if this leaf is not provisioned.

5.10k <X>/ExceptionDataReportingAllowed

For the UE in NB-S1 mode, the ExceptionDataReportingAllowed leaf indicates whether the UE is allowed to use the RRC establishment cause mo-ExceptionData, as specified in 3GPP TS 24.301 [5].

For the UE in NB-N1 mode, the ExceptionDataReportingAllowed leaf indicates whether the UE is allowed to use the RRC establishment cause mo-ExceptionData, as specified in 3GPP TS 24.501 [11].

- Occurrence: ZeroOrOne
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 Indicates that the UE is not allowed to use the RRC establishment cause mo-ExceptionData.
- 1 Indicates that the UE is allowed to use the RRC establishment cause mo-ExceptionData.

If this leaf is not provisioned, the value of 0 is used.

5.10l /<X>/3GPP_PS_data_off/Exempted_service_list_roaming

The interior node contains one or more services which are exempted of 3GPP PS data off when the UE is in the VPLMN. If this node is not present, the Exempted_service_list is used when the UE is in the VPLMN.

- Occurrence: One
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10m

/<X>/3GPP_PS_data_off/Exempted_service_list_roaming/Device_management_over_PS

The Device_management_over_PS leaf indicates whether Device management over PS is a 3GPP PS data off exempt service when the UE is in the VPLMN.

- Occurrence: One
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 - Indicates that the device management over PS is not a 3GPP PS data off exempt service when the UE is in the VPLMN.
- 1 - Indicates that the device management over PS is a 3GPP PS data off exempt service when the UE is in the VPLMN.

5.10n

/<X>/3GPP_PS_data_off/Exempted_service_list_roaming/Bearer_independent_protocol

The Bearer_independent_protocol leaf indicates whether Bearer independent protocol is a 3GPP PS data off exempt service when the UE is in the VPLMN.

- Occurrence: One
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 - Indicates that the bearer independent protocol is not a 3GPP PS data off exempt service when the UE is in the VPLMN (see 3GPP TS 31.111 [7]).
- 1 - Indicates that the bearer independent protocol is a 3GPP PS data off exempt service when the UE is in the VPLMN (see 3GPP TS 31.111 [7]).

5.10na

/<X>/3GPP_PS_data_off/Exempted_service_list_roaming/Location_services_over_LCS_UPP

The LCS_UPP leaf indicates whether location services over Location Services User Plane protocol (LCS-UPP) is a 3GPP PS data off exempt service when the UE is in the VPLMN.

- Occurrence: ZeroOrOne
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 - Indicates that the location services over LCS-UPP is not a 3GPP PS data off exempt service when the UE is in the VPLMN.
- 1 - Indicates that the location services over LCS-UPP is a 3GPP PS data off exempt service when the UE is in the VPLMN.

The default value 0 applies if this leaf is not provisioned.

5.10nb /<X>/3GPP_PS_data_off/Exempted_service_list_non-subscribed_SNP

The interior node contains one or more services which are exempted of 3GPP PS data off when the UE with the selected PLMN subscription is in the non-subscribed SNP.

- Occurrence: One
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10nc /<X>/3GPP_PS_data_off/Exempted_service_list_non-subscribed_SNP/Device_management_over_PS

The Device_management_over_PS leaf indicates whether device management over PS is a 3GPP PS data off exempt service when the UE with the selected PLMN subscription is in the non-subscribed SNP.

- Occurrence: One
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 - Indicates that the device management over PS is not a 3GPP PS data off exempt service when the UE is in the non-subscribed SNP.
- 1 - Indicates that the device management over PS is a 3GPP PS data off exempt service when the UE is in the non-subscribed SNP.

5.10nd /<X>/3GPP_PS_data_off/Exempted_service_list_non-subscribed_SNPB/Bearer_independent_protocol

The Bearer_independent_protocol leaf indicates whether bearer independent protocol is a 3GPP PS data off exempt service when the UE with the selected PLMN subscription is in the non-subscribed SNPN.

- Occurrence: One
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 - Indicates that the bearer independent protocol is not a 3GPP PS data off exempt service when the UE is in the non-subscribed SNPN (see 3GPP TS 31.111 [7]).
 - 1 - Indicates that the bearer independent protocol is a 3GPP PS data off exempt service when the UE is in the non-subscribed SNPN (see 3GPP TS 31.111 [7]).

5.10ne /<X>/3GPP_PS_data_off/Exempted_service_list_non-subscribed_SNPB/Location_services_over_LCS_UPP

The Location_services_over_LCS_UPP leaf indicates whether location services over Location Services User Plane protocol (LCS-UPP) is a 3GPP PS data off exempt service when the UE with the selected PLMN subscription is in the non-subscribed SNPN.

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 - Indicates that the location services over LCS-UPP is not a 3GPP PS data off exempt service when the UE is in the non-subscribed SNPN (see 3GPP TS 31.111 [7]).
 - 1 - Indicates that the location services over LCS-UPP is a 3GPP PS data off exempt service when the UE is in the non-subscribed SNPN (see 3GPP TS 31.111 [7]).

The default value 0 applies if this leaf is not provisioned.

5.10o /<X>/EARFCNList

This interior node contains a list of EARFCNs configured to the UE for initial cell search of MTC carrier or NB-IoT carrier as specified in 3GPP TS 36.304 [10].

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10p /<X>/EARFCNList/<X>

This interior node acts as a placeholder for one or more EARFCNs and associated geographical area configured to the UE for initial cell search of MTC carrier or NB-IoT carrier as specified in 3GPP TS 36.304 [10].

- Occurrence: OneOrMore
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10q /<X>/EARFCNList/<X>/EARFCN

The EARFCN leaf contains an EARFCN configured to the UE for initial cell search of MTC carrier or NB-IoT carrier as specified in 3GPP TS 36.304 [10].

- Occurrence: One
- Format: chr
- Access Types: Get, Replace
- Values: <EARFCN>

The format of the EARFCN is defined by 3GPP TS 36.101 [8].

5.10r /<X>/EARFCNList/<X>/GeographicalArea

The GeographicalArea node acts as a placeholder for the geographical area associated with an EARFCN configured to the UE. The EARFCN is used by the UE for initial cell search of MTC carrier or NB-IoT carrier as specified in 3GPP TS 36.304 [10] when the UE is within the associated geographical area.

- Occurrence: One
- Format: Node
- Access Types: Get, Replace
- Values: N/A

5.10s /<X>/EARFCNList/<X>/GeographicalArea/Polygon

The Polygon node acts as a placeholder for polygon geographical area descriptions.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10t /<X>/EARFCNList/<X>/GeographicalArea/Polygon/<X>

This interior node acts as a placeholder for one or more polygon geographical area descriptions.

- Occurrence: OneOrMore
- Format: node
- Access Types: Get, Replace
- Values: <N/A >

5.10u /<X>/EARFCNList/<X>/GeographicalArea/Polygon/<X>/Coordinates

The Coordinates node acts as a placeholder for geographical coordinates outlining the borders of a polygon geographical area.

- Occurrence: One
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10v /<X>/EARFCNList/<X>/GeographicalArea/Polygon/<X>/Coordinates/<X>

This interior node acts as a placeholder for one or more geographical coordinates.

- Occurrence: OneOrMore
- Format: node
- Access Types: Get, Replace
- Values: <N/A>

NOTE: The upper limit of 15 specified in 3GPP TS 23.032 [9] for the number of points in a polygon shape does not apply to the number of coordinates in a geographical area described as a polygon for initial cell search of MTC or NB-IoT carrier.

5.10w /<X>/EARFCNList/<X>/GeographicalArea/Polygon/<X>/Coordinates/<X>/Latitude

The Latitude leaf contains the latitude of a geographical coordinate outlining the border of the polygon geographical area.

- Occurrence: One
- Format: bin
- Access Types: Get, Replace
- Values: <Latitude>

The Latitude is defined in clause 6.1 of 3GPP TS 23.032 [9].

5.10x /<X>/EARFCNList/<X>/GeographicalArea/Polygon/<X>/Coordinates/<X>/Longitude

The Longitude leaf contains the longitude of a geographical coordinate outlining the border of the polygon geographical area.

- Occurrence: One
- Format: bin
- Access Types: Get, Replace
- Values: <Longitude>

The Longitude is defined in clause 6.1 of 3GPP TS 23.032 [9].

5.10y /<X>/RLOSPreferredPLMNList

This interior node contains a list of RLOS preferred PLMNs configured to the UE for selection of a PLMN offering access to RLOS as specified in 3GPP TS 23.122 [3].

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10z /<X>/RLOSPreferredPLMNList/<X>

This interior node acts as a placeholder for one or more RLOS preferred PLMNs configured to the UE for selection of a PLMN offering access to RLOS as specified in 3GPP TS 23.122 [3].

- Occurrence: OneOrMore
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10za /<X>/RLOSPreferredPLMNList/<X>/PLMN

The PLMN leaf indicates the PLMN code of the RLOS preferred PLMN.

- Occurrence: One
- Format: chr
- Access Types: Get, Replace
- Values: <PLMN>

The PLMN is in the format defined by 3GPP TS 23.003 [13], with each digit of the MCC and MNC encoded as an ASCII character.

5.10zb /<X>/RLOSPreferredPLMNList/<X>/PLMNPriority

The PLMNPriority leaf represents the priority of the RLOS preferred PLMN in the RLOS preferred PLMN list and is represented as a numerical value.

- Occurrence: One
- Format: int
- Access Types: Get, Replace
- Values: <PLMN Priority>

The UE shall treat the PLMN with the lowest PLMNPriority value as the PLMN having the highest priority. If the UE finds multiple PLMNs with the same priority, the choice of the PLMN is UE implementation specific.

5.10zc /<X>/MfgAssignUERadioCapId

This interior node contains a list of manufacturer-assigned UE radio capability IDs configured in the UE as an alternative for signalling the radio capabilities container as specified in 3GPP TS 24.501 [11].

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10zca/<X>/MfgAssignUERadioCapId/VendorID

The VendorID leaf contains the Vendor ID for the manufacturer-assigned UE radio capability IDs configured in the UE.

- Occurrence: One
- Format: chr
- Access Types: Get, Replace
- Values: <VendorID>

The format of the Vendor ID is defined by 3GPP TS 23.003 [13].

5.10zd /<X>/MfgAssignUERadioCapId/<X>

This interior node acts as a placeholder for one or more Radio Configuration Identifiers (RCI) which identifies the UE radio configuration for which the manufacturer-assigned UE radio capability IDs are applicable as specified in 3GPP TS 23.003 [13].

- Occurrence: OneOrMore
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10ze /<X>/MfgAssignUERadioCapId/<X>/RCI

The RCI leaf contains the Radio Configuration Identifier (RCI) which identifies the UE radio configuration as specified in 3GPP TS 23.003 [13].

- Occurrence: One
- Format: chr
- Access Types: Get, Replace
- Values: <RCI>

The format of the RCI is defined by 3GPP TS 23.003 [13].

5.10zf /<X>/MfgAssignUERadioCapId/<X>/UERadioConfigLTE

The UERadioConfigLTE leaf contains the UE radio capabilities associated with the Radio Configuration Identifier (RCI), encoded as a binary string as specified in 3GPP TS 36.331 [14].

- Occurrence: ZeroOrOne

- Format: bin
- Access Types: Get, Replace
- Values: <UERadioConfigLTE>

The UERadioConfigLTE is defined as the *UE-CapabilityRAT-ContainerList* in clause 6.3.6 of 3GPP TS 36.331 [14].

5.10zg /<X>/MfgAssignUERadioCapId/<X>/UERadioConfigNR

The UERadioConfigNR leaf contains the UE radio capabilities associated with the Radio Configuration Identifier (RCI), encoded as a binary string as specified in 3GPP TS 38.331 [15].

- Occurrence: ZeroOrOne
- Format: bin
- Access Types: Get, Replace
- Values: <UERadioConfigNR>

The UERadioConfigNR is defined as the *UE-CapabilityRAT-ContainerList* in clause 6.3.3 of 3GPP TS 38.331 [15].

5.10zh /<X>/RLOSAllowedMCCList

This interior node contains a list of RLOS allowed MCCs configured to the UE for selection of a PLMN offering access to RLOS as specified in 3GPP TS 23.122 [3].

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10zi /<X>/RLOSAllowedMCCList/<X>

This interior node acts as a placeholder for one or more RLOS Allowed MCCs configured to the UE for selection of a PLMN offering access to RLOS as specified in 3GPP TS 23.122 [3].

- Occurrence: OneOrMore
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10zj /<X>/RLOSAllowedMCCList/<X>/MCC

The MCC leaf indicates the MCC value of the RLOS allowed MCC.

- Occurrence: One
- Format: chr
- Access Types: Get, Replace
- Values: <MCC>

The MCC is in the format defined by 3GPP TS 23.003 [13], with each digit of the MCC encoded as an ASCII character.

5.10zk /<X>/SNPN_Configuration

This interior node contains configuration parameters regarding a UE operating in SNPN access operation mode.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10zl /<X>/SNPN_Configuration/<X>

This interior node acts as a placeholder for a list of:

- 1) SNPN identity;
- 2) configuration parameters regarding 3GPP PS data off for a UE which selected an entry of "list of subscriber data" with the subscribed SNPN identified by the SNPN identifier; and
- 3) configured UE retry wait time value for a UE which selected an entry of "list of subscriber data" with the subscribed SNPN identified by the SNPN identifier.

NOTE: For each of the elements in the list, 1) must be present and either 2), 3), or both needs to appear.

- Occurrence: OneOrMore
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10zm /<X>/SNPN_Configuration/<X>/SNPN_identifier

This leaf indicates the SNPN identity of the subscribed SNPN of an entry of "list of subscriber data", for which the 3GPP_PS_data_off leaf or SM_RetryWaitTime leaf is applicable.

- Occurrence: One
- Format: chr
- Access Types: Get, Replace
- Values: <PLMN><NID>

The PLMN and NID are in the format defined by 3GPP TS 23.003 [13], with each digit of the MCC and MNC of the PLMN and each digit of the assignment mode and NID value of the NID encoded as an ASCII character.

5.10zn /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off

The interior node contains configuration parameters regarding 3GPP PS data off for a UE in the SNPN identified by the SNPN_identifier leaf or a non-subscribed SNPN.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10zo

/<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/Exempted_service_list

This interior node contains one or more services which are exempted of 3GPP PS data off when the UE is in the SNPN identified by the SNPN_identifier leaf. If the Exempted_service_list_non_subscribed_SNPN node is not present, this list is also used when the UE is in non-subscribed SNPN.

- Occurrence: One
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10zp /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/Exempted_service_list/Device_management_over_PS

This leaf indicates whether Device management over PS is a 3GPP PS data off exempt service when the UE is in the SNPN identified by the SNPN_identifier leaf.

- Occurrence: One
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 - Indicates that the device management over PS is not a 3GPP PS data off exempt service when the UE is in the SNPN identified by the SNPN_identifier leaf.
- 1 - Indicates that the device management over PS is a 3GPP PS data off exempt service when the UE is in the SNPN identified by the SNPN_identifier leaf.

5.10zq /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/Exempted_service_list/Bearer_independent_protocol

This leaf indicates whether Bearer independent protocol is a 3GPP PS data off exempt service when the UE is in the SNPN identified by the SNPN_identifier leaf.

- Occurrence: ZeroOrOne
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 - Indicates that the bearer independent protocol is not a 3GPP PS data off exempt service when the UE is the SNPN identified by the SNPN_identifier leaf (see 3GPP TS 31.111 [7]).
- 1 - Indicates that the bearer independent protocol is a 3GPP PS data off exempt service when the UE is the SNPN identified by the SNPN_identifier leaf (see 3GPP TS 31.111 [7]).

5.10zq1 /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/Exempted_service_list/Location_services_over_LCS_UPP

This leaf indicates whether location services over Location Services User Plane protocol (LCS-UPP) is a 3GPP PS data off exempt service when the UE is in the SNPN identified by the SNPN_identifier leaf.

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1

0 - Indicates that the location services over LCS-UPP is not a 3GPP PS data off exempt service when the UE is the SNPN identified by the SNPN_identifier leaf.

1 - Indicates that the location services over LCS-UPP is a 3GPP PS data off exempt service when the UE is the SNPN identified by the SNPN_identifier leaf.

The default value 0 applies if this leaf is not provisioned.

5.10zr <X>/SNPN_Configuration/<X>/SM_RetryWaitTime

This leaf indicates a configured UE retry wait time value for a UE in the SNPN identified by the SNPN_identifier leaf in order to control the UE session management retry behaviour when prior session management request was rejected by the network with cause value #8, #27, #32, #33, #70 as specified in 3GPP TS 24.501 [11].

- Occurrence: ZeroOrOne
- Format: int
- Access Types: Get, Replace
- Values: 0-255

SM_RetryWaitTime shall be coded in the same format as the value part of GPRS Timer 3 IE as specified in table 10.5.163a/3GPP TS 24.008 [4] converted into a decimal value.

5.10zs <X>/SNPN_Configuration/<X>/Timer_T3245_Behaviour

This leaf indicates whether the timer T3245 and the related functionality as specified in 3GPP TS 24.501 [11] is used by the UE operating in SNPN access operation mode.

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1

0 Indicates that the timer T3245 is not used.

1 Indicates that the timer T3245 is used.

The default value 0 applies if this leaf is not provisioned.

5.10zt /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/ Exempted_service_list_non_subscribed_SNP

This interior node contains one or more services which are exempted of 3GPP PS data off when the UE is in a non-subscribed SNPN. If this node is not present, the Exempted_service_list is used when the UE is in the non-subscribed SNPN.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10zu /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/ Exempted_service_list_non_subscribed_SNP/ Device_management_over_PS

This leaf indicates whether Device management over PS is a 3GPP PS data off exempt service when the UE is in the non-subscribed SNPN.

- Occurrence: One
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 - Indicates that the device management over PS is not a 3GPP PS data off exempt service when the UE is in the non-subscribed SNPN.
- 1 - Indicates that the device management over PS is a 3GPP PS data off exempt service when the UE is in the non-subscribed SNPN.

5.10zv /<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/ Exempted_service_list_non_subscribed_SNP/ Bearer_independent_protocol

This leaf indicates whether Bearer independent protocol is a 3GPP PS data off exempt service when the UE is in the non-subscribed SNPN.

- Occurrence: ZeroOrOne
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 - Indicates that the bearer independent protocol is not a 3GPP PS data off exempt service when the UE is in the non-subscribed SNPN (see 3GPP TS 31.111 [7]).
- 1 - Indicates that the bearer independent protocol is a 3GPP PS data off exempt service when the UE is in the non-subscribed SNPN (see 3GPP TS 31.111 [7]).

5.10zv1/<X>/SNPN_Configuration/<X>/3GPP_PS_data_off/ Exempted_service_list_non_subscribed_SNP/

Location_services_over_LCS_UPP

This leaf indicates whether location services over Location Services User Plane protocol (LCS-UPP) is a 3GPP PS data off exempt service when the UE is in the non-subscribed SNPN.

- Occurrence: ZeroOrOne
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 - Indicates that the location services over LCS-UPP is not a 3GPP PS data off exempt service when the UE is in the non-subscribed SNPN.
- 1 - Indicates that the location services over LCS-UPP is a 3GPP PS data off exempt service when the UE is in the non-subscribed SNPN.

The default value 0 applies if this leaf is not provisioned.

5.10zw <X>/NoEUTRADisablingIn5GS

The NoEUTRADisablingIn5GS leaf indicates whether No E-UTRA Disabling In 5GS is disabled or enabled. If No E-UTRA Disabling In 5GS is enabled, the UE shall not disable the E-UTRA capability upon starting timer T3402 when the attach attempt counter or tracking area updating attempt counter reaches 5 and the UE selects an NG-RAN cell.

- Occurrence: ZeroOrOne
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 Indicates that No E-UTRA Disabling In 5GS is disabled, see 3GPP TS 24.301 [5]
- 1 Indicates that No E-UTRA Disabling In 5GS is enabled, see 3GPP TS 24.301 [5]

The default value 0 applies if this leaf is not provisioned.

5.10zx /<X>/ Re_enable_N1_upon_reattach

This leaf indicates whether re-enabling N1 mode capability when performing re-attach in EPS is enabled or not. If re-enabling N1 mode capability when performing re-attach in EPS is enabled, the UE shall enable N1 mode capability for 3GPP access if it was previously disabled when receiving the DETACH REQUEST message and the detach type indicates "re-attach required" (see 3GPP TS 24.301 [5]).

- Occurrence: ZeroOrOne
 - Format: bool
 - Access Types: Get, Replace
 - Values: 0, 1
- 0 - Indicates that re-enabling N1 mode capability when performing re-attach is disabled, see 3GPP TS 24.301 [5]
- 1 - Indicates that re-enabling N1 mode capability when performing re-attach is enabled, see 3GPP TS 24.301 [5]

The default value 0 applies if this leaf is not provisioned.

5.10zy /<X>/CustomLLFailureRetry

The interior node contains configuration parameters to enable the custom retry in case of lower layer failure to establish the RRC connection during an attach or tracking area updating procedure, see 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10zz /<X>/ CustomLLFailureRetry/MinRetryTimer

The MinRetryTimer leaf contains the minimum retry timer value in seconds for the lower layer failure to establish the RRC connection during an attach or tracking area updating procedure, see 3GPP TS 24.301 [5].

- Occurrence: One
- Format: int
- Access Types: Get, Replace
- Values: 1-255

5.10zz1/<X>/ CustomLLFailureRetry/MaxRetryTimer

The MaxRetryTimer leaf contains the maximum retry timer value in seconds for the lower layer failure to establish the RRC connection during an attach or tracking area updating procedure, see 3GPP TS 24.301 [5].

- Occurrence: One
- Format: int
- Access Types: Get, Replace
- Values: 1-1024

5.10zz2/<X>/ CustomLLFailureRetry/MaxMinRetry

The MaxMinRetry leaf contains the maximum number of allowed consecutive retries with MinRetryTimer for the lower layer failure to establish the RRC connection during an attach or tracking area updating procedure, see 3GPP TS 24.301 [5].

- Occurrence: One
- Format: int
- Access Types: Get, Replace
- Values: 1-20

5.10zz3/<X>/UE_using_SENSE

This leaf indicates whether SENSE is used by the UE or not as specified in 3GPP TS 23.122 [3].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace

- Values: 0, 1
 - 0 - Indicates that SENSE is not used by the UE.
 - 1 - Indicates that SENSE is used by the UE.

If this leaf is not provisioned, the value of 0 is used.

5.10zz4/<X>/DefaultNSSAIInclusionMode

This leaf indicates the default NSSAI inclusion mode pre-configured by the operator when the UE is in its HPLMN or EHPLMN.

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 - Indicates that no pre-configured NSSAI inclusion mode by default.
 - 1 - Indicates that the UE operates according to NSSAI inclusion mode C by default.

If this leaf is not provisioned, the value of 0 is used. The use of NSSAI inclusion mode is specified in 3GPP TS 24.501 [11].

5.10zz5/<X>/MPS_NAIdecoration

This leaf provides the means to enable the NAI decoration for MPS access by the UE as specified in 3GPP TS 23.003 [13].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 – Indicates that NAI decoration for MPS access is disabled.
 - 1 – Indicates that NAI decoration for MPS access is enabled.

The default value of 0 applies if this leaf is not provisioned.

5.10zz6/<X>/HPA_NAIdecoration

This leaf provides the means to enable the NAI decoration for high priority access by the UE as specified in 3GPP TS 23.003 [13].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 – Indicates that NAI decoration for high priority access is disabled.
 - 1 – Indicates that NAI decoration for high priority access is enabled.

The default value of 0 applies if this leaf is not provisioned.

5.10zz7/<X>/SNPN_Configuration/<X>/MPS_NAIdecoration

This leaf provides the means to enable the NAI decoration for MPS access by the UE operating in SNPN access operation mode as specified in 3GPP TS 23.003 [13].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 – Indicates that NAI decoration for MPS access is disabled.
 - 1 – Indicates that NAI decoration for MPS access is enabled.

The default value of 0 applies if this leaf is not provisioned.

5.10zz8/<X>/SNPN_Configuration/<X>/HPA_NAIdecoration

This leaf provides the means to enable the NAI decoration for high priority access by the UE operating in SNPN access operation mode as specified in 3GPP TS 23.003 [13].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 – Indicates that NAI decoration for high priority access is disabled.
 - 1 – Indicates that NAI decoration for high priority access is enabled.

The default value of 0 applies if this leaf is not provisioned.

5.10zz9/<X>/Satellite_Disabling_Allowed_for_5GMM_cause_#15

This leaf indicates whether the UE is allowed to disable the satellite NG-RAN capability when it receives the Extended 5GMM cause IE with value "Satellite NG-RAN not allowed in PLMN" as described in 3GPP TS 24.501 [11].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 - Indicates that "Satellite Access Disabling for 5GMM cause #15" is disabled, see 3GPP TS 24.501 [11].
 - 1 - Indicates that "Satellite Access Disabling for 5GMM cause #15" is enabled, see 3GPP TS 24.501 [11].

If this leaf is not provisioned, the value of 0 is used.

5.10zz10 /<X>/Satellite_Disabling_Allowed_for_EMM_cause_#15

This leaf indicates whether the UE is allowed to disable the satellite E-UTRAN capability when it receives the Extended EMM cause IE with value "Satellite E-UTRAN not allowed in PLMN" as described in 3GPP TS 24.301 [5].

- Occurrence: ZeroOrOne
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1
 - 0 - Indicates that "Satellite Access Disabling for EMM cause #15" is disabled, see 3GPP TS 24.301 [5].
 - 1 - Indicates that "Satellite Access Disabling for EMM cause #15" is enabled, see 3GPP TS 24.301 [5].

If this leaf is not provisioned, the value of 0 is used.

5.10zz11 /<X>/CustomLLFailureRetry5G

The interior node contains configuration parameters to enable the custom retry in case of lower layer failure to establish the NR RRC connection during a registration procedure, see 3GPP TS 24.501 [11].

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10zz12 /<X>/ CustomLLFailureRetry5G/MinRetryTimer

The MinRetyTimer leaf contains the minimum retry timer value in seconds for the lower layer failure to establish the RRC connection during a registration procedure, see 3GPP TS 24.501 [11].

- Occurrence: One
- Format: int
- Access Types: Get, Replace
- Values: 1-255

5.10zz13 /<X>/ CustomLLFailureRetry5G/MaxRetryTimer

The MaxRetyTimer leaf contains the maximum retry timer value in seconds for the lower layer failure to establish the RRC connection during registration procedure, see 3GPP TS 24.501 [11].

- Occurrence: One
- Format: int
- Access Types: Get, Replace
- Values: 1-1024

5.10zz14 /<X>/ CustomLLFailureRetry5G/MaxMinRetry

The MaxMinRetry leaf contains the maximum number of allowed consecutive retries with MinRetryTimer for the lower layer failure to establish the RRC connection during a registration procedure, see 3GPP TS 24.501 [11].

- Occurrence: One
- Format: int
- Access Types: Get, Replace
- Values: 1-20

5.10zz15 /<X>/FasterRecovery

The interior node contains configuration parameters to enable faster service recovery by adding more events to a) stop T3411 or T3511 timer, b) trigger the Attach or TAU procedure while T3402 timer is running or c) trigger the registration procedure while T3502 timer is running, see 3GPP TS 24.301 [5] and 3GPP TS 24.501 [11].

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.10zz16 /<X>/FasterRecovery/MaxNumShortTimerStop

The MaxNumShortTimerStop leaf contains the maximum number of allowed abnormal stops to T3411 or T3511 timer, see 3GPP TS 24.301 [5] and 3GPP TS 24.501 [11].

- Occurrence: One
- Format: Int
- Access Types: Get, Replace
- Values: 1,2

5.10zz17/<X>/FasterRecovery/MaxNumLongTimerReg

The MaxNumLongTimerReg leaf contains the maximum number of allowed attempts to a) trigger the Attach or TAU procedure while T3402 timer is running or b) trigger the registration procedure while T3502 timer is running, see 3GPP TS 24.301 [5] and 3GPP TS 24.501 [11].

- Occurrence: One
- Format: Int
- Access Types: Get, Replace
- Values: 1-5

5.10zz18 /<X>/FasterRecovery/ShortTimerEvent

The ShortTimerEvent leaf contains the events that are allowed to abnormally stop to T3411 or T3511, see 3GPP TS 24.301 [5] and 3GPP TS 24.501 [11].

- Occurrence: ZeroOrOne

- Format: Int
- Access Types: Get, Replace
- Values: 0, 1, 2
 - 0 - New cell in the access technology where T3411 or T3511 started is selected by the lower layer.
 - 1 - The RSRP is improved by at least 10 dB (with or without cell change).
 - 2 - Either 0 or 1.

The default value 0 applies if this leaf is not provisioned.

5.10zz19 /<X>/FasterRecovery/LongTimerEvent

The LongTimerEvent leaf contains the events that are allowed to a) trigger the Attach or TAU procedure while T3402 timer is running or b) trigger the registration procedure while T3502 timer is running, see 3GPP TS 24.301 [5] and 3GPP TS 24.501 [11].

- Occurrence: ZeroOrOne
- Format: Int
- Access Types: Get, Replace
- Values: 0, 1, 2, 3
 - 0 - New cell in the access technology where T3402 or T3502 started is detected by the lower layer.
 - 1 - The RSRP in the access technology where T3402 or T3502 started is improved at least 10 dB.
 - 2 - The distance from the location of starting T3402 or T3502 to the current UE location is larger than 10 km.
 - 3 - Either 0, 1, or 2.

The default value 0 applies if this leaf is not provisioned.

5.10zz20/<X>/FasterRecovery/AccessTechnology

The AccessTechnology leaf defines the access technology where these configurations are used.

- Occurrence: One
- Format: Int
- Access Types: Get, Replace
- Values: 0, 1, 2
 - 0 - It is applied to S1 mode only as specified in 3GPP TS 24.301 [5].
 - 1 - It is applied to N1 mode only as specified in 3GPP TS 24.501 [11].
 - 2 - It is applied to S1 mode as specified in 3GPP TS 24.301 [5] and N1 mode as specified in 3GPP TS 24.501 [11].

5.11 <X>/Ext

The Ext is an interior node for where the vendor specific information about the NAS configuration MO is being placed (vendor meaning application vendor, device vendor etc.). Usually the vendor extension is identified by vendor specific name under the ext node. The tree structure under the vendor identifier is not defined and can therefore include one or more un-standardized sub-trees.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get
- Values: N/A

Annex A (informative): NAS configuration MO DDF

This DDF is the standardized minimal set. A vendor can define its own DDF for the complete device. This DDF can include more features than this minimal standardized version.

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE MgmtTree PUBLIC "-//OMA//DTD-DM-DDF 1.2//EN"
"http://www.openmobilealliance.org/tech/DTD/dm_ddf-v1_2.dtd">

<MgmtTree>
  <VerDTD>1.2</VerDTD>
  <Man>--The device manufacturer--</Man>
  <Mod>--The device model--</Mod>

  <Node>
    <NodeName/>
    <DFProperties>
      <AccessType>
        <Get/>
      </AccessType>
      <Description>NAS configuration</Description>
      <DFFormat>
        <node/>
      </DFFormat>
      <Occurrence>
        <ZeroOrOne/>
      </Occurrence>
      <DFTitle>The NAS configuration Management Object.</DFTitle>
      <DFType>
        <DDFName>urn:oma:mo:ext-3gpp-nas-config:1.0</DDFName>
      </DFType>
    </DFProperties>

    <Node>
      <NodeName>NAS_SignallingPriority</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <int/>
        </DFFormat>
        <Occurrence>
          <ZeroOrOne/>
        </Occurrence>
        <DFTitle>NAS Signalling Priority.</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>

    <Node>
      <NodeName>AttachWithIMSI</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <bool/>
        </DFFormat>
        <Occurrence>
          <ZeroOrOne/>
        </Occurrence>
        <DFTitle>Attach with IMSI.</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>

    <Node>
```

```
<NodeName>MinimumPeriodicSearchTimer</NodeName>
<DFProperties>
  <AccessType>
    <Get/>
    <Replace/>
  </AccessType>
  <DFFormat>
    <int/>
  </DFFormat>
  <Occurrence>
    <ZeroOrOne/>
  </Occurrence>
  <DFTitle>Minimum periodic search timer.</DFTitle>
  <DFType>
    <MIME>text/plain</MIME>
  </DFType>
</DFProperties>
</Node>

<Node>
  <NodeName>NMO_I_Behaviour</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <bool/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle>NMO I behaviour.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>

<Node>
  <NodeName>Timer_T3245_Behaviour</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <bool/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle>Timer T3245 Behaviour.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>

<Node>
  <NodeName>ExtendedAccessBarring</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <bool/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle>Extended Access Barring.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>
```

```
<Node>
  <NodeName>Override_NAS_SignallingLowPriority</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <bool/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle>Override NAS Signalling Low Priority.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>

<Node>
  <NodeName>Override_ExtendedAccessBarring</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <bool/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle>Override ExtendedAccessBarring.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>

<Node>
  <NodeName>FastFirstHigherPriorityPLMNSearch</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <bool/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle> FastFirstHigherPriorityPLMNSearch.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>

<Node>
  <NodeName>EUTRADisablingAllowedForEMMCause15</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <bool/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle> EUTRADisablingAllowedForEMMCause15.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>
```

```

        </DFType>
      </DFProperties>
    </Node>

    <Node>
      <NodeName>SM_RetryWaitTime</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <int/>
        </DFFormat>
        <Occurrence>
          <ZeroOrOne/>
        </Occurrence>
        <DFTitle> SM_RetryWaitTime</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>

    <Node>
      <NodeName>SM_RetryAtRATChange</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <bool/>
        </DFFormat>
        <Occurrence>
          <ZeroOrOne/>
        </Occurrence>
        <DFTitle> SM_RetryAtRATChange</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>

    <Node>
      <NodeName>ExceptionDataReportingAllowed</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <bool/>
        </DFFormat>
        <Occurrence>
          <ZeroOrOne/>
        </Occurrence>
        <DFTitle> ExceptionDataReportingAllowed.</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>

    <Node>
      <NodeName> Default_DCN_ID</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <int/>
        </DFFormat>
        <Occurrence>
          <ZeroOrOne/>
        </Occurrence>
        <DFTitle>Default_DCN_ID </DFTitle>

```

```

    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>

<Node>
  <NodeName>3GPP_PS_data_off</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <node/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <Scope>
      <Dynamic/>
    </Scope>
    <DFTitle>Configuration parameters for 3GPP PS data off.</DFTitle>
    <DFType>
      <DDFName/>
    </DFType>
  </DFProperties>

  <Node>
    <NodeName>Exempted_service_list</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <node/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle>List of services which are exempted of 3GPP PS data off when the UE is
in its HPLMN or EHPLMN.</DFTitle>
      <DFType>
        <DDFName/>
      </DFType>
    </DFProperties>

    <Node>
      <NodeName>Device_management_over_PS</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <bool/>
        </DFFormat>
        <Occurrence>
          <One/>
        </Occurrence>
        <Scope>
          <Dynamic/>
        </Scope>
        <DFTitle>Device management over PS which is a 3GPP PS data off exempt
service when the UE is in its HPLMN or EHPLMN.</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>

    <Node>
      <NodeName>Bearer_independent_protocol</NodeName>
      <DFProperties>

```

```

        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <bool/>
        </DFFormat>
        <Occurrence>
          <One/>
        </Occurrence>
        <Scope>
          <Dynamic/>
        </Scope>
        <DFTitle>Bearer independent protocol which is a 3GPP PS data off exempt
service when the UE is in its HPLMN or EHPLMN.</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>

    <Node>
      <NodeName>Location_services_over_LCS_UPP</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <bool/>
        </DFFormat>
        <Occurrence>
          <ZeroOrOne/>
        </Occurrence>
        <Scope>
          <Dynamic/>
        </Scope>
        <DFTitle>Location services over LCS-UPP which is a 3GPP PS data off exempt
service when the UE is in its HPLMN or EHPLMN.</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>
  </Node>

  <Node>
    <NodeName>Exempted_service_list_roaming</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <node/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle>List of services which are exempted of 3GPP PS data off when the UE is
in the VPLMN.</DFTitle>
      <DFType>
        <DDFName/>
      </DFType>
    </DFProperties>
  </Node>

  <Node>
    <NodeName>Device_management_over_PS</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <bool/>

```

```

        </DFFormat>
        <Occurrence>
          <One/>
        </Occurrence>
        <Scope>
          <Dynamic/>
        </Scope>
        <DFTitle>Device management over PS which is a 3GPP PS data off exempt
service when the UE is in the VPLMN.</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>

    <Node>
      <NodeName>Bearer_independent_protocol</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <bool/>
        </DFFormat>
        <Occurrence>
          <One/>
        </Occurrence>
        <Scope>
          <Dynamic/>
        </Scope>
        <DFTitle>Bearer independent protocol which is a 3GPP PS data off exempt
service when the UE is in the VPLMN.</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>

    <Node>
      <NodeName>Location_services_over_LCS_UPP</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <bool/>
        </DFFormat>
        <Occurrence>
          <ZeroOrOne/>
        </Occurrence>
        <Scope>
          <Dynamic/>
        </Scope>
        <DFTitle>Location services over LCS-UPP which is a 3GPP PS data off exempt
service when the UE is in the VPLMN.</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>

  </Node>

  <Node>
    <NodeName>Exempted_service_list_non_subscribed_SNPN</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <node/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <Scope>

```

```

        <Dynamic/>
    </Scope>
    <DFTitle>List of services which are exempted of 3GPP PS data off for a UE with
the selected PLMN subscription in non-subscribed SNPN.</DFTitle>
    <DFType>
        <DDFName/>
    </DFType>
</DFProperties>

<Node>
    <NodeName>Device_management_over_PS</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <One/>
        </Occurrence>
        <Scope>
            <Dynamic/>
        </Scope>
        <DFTitle>Device management over PS which is a 3GPP PS data off exempt
service for a UE the selected PLMN subscription in non-subscribed SNPN.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>
<Node>
    <NodeName>Bearer_independent_protocol</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <Scope>
            <Dynamic/>
        </Scope>
        <DFTitle>Bearer_independent_protocol which is a 3GPP PS data off exempt
service for a UE the selected PLMN subscription in non-subscribed SNPN.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>Location_services_over_LCS_UPP</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <Scope>
            <Dynamic/>
        </Scope>
        <DFTitle>Location services over LCS-UPP which is a 3GPP PS data off exempt
service for a UE with the selected PLMN subscription in non-subscribed SNPN.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>
</Node>

```

```

</Node>
<Node>
  <NodeName>EARFCNList</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <node/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <Scope>
      <Dynamic/>
    </Scope>
    <DFTitle>List of EARFCN for initial cell search of MTC carrier or NB-IoT
carrier.</DFTitle>
    <DFType>
      <DDFName/>
    </DFType>
  </DFProperties>

  <Node>
    <NodeName></NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <node/>
      </DFFormat>
      <Occurrence>
        <OneOrMore/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle> List of EARFCNs and associated geographical area for initial cell
search of MTC carrier or NB-IoT carrier.</DFTitle>
      <DFType>
        <DDFName/>
      </DFType>
    </DFProperties>

    <Node>
      <NodeName>EARFCN</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <chr/>
        </DFFormat>
        <Occurrence>
          <One/>
        </Occurrence>
        <DFTitle>EARFCN configured to the UE for initial cell search of MTC carrier
of NB-IoT carrier.</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>

    <Node>
      <NodeName>GeographicalArea</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <node/>
        </DFFormat>
      </DFProperties>
    </Node>
  </Node>

```

```

    </DFFormat>
    <Occurrence>
      <One/>
    </Occurrence>
    <DFTitle>Geographical Area description.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>

  <Node>
    <NodeName>Polygon</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <node/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <DFTitle>Polygon Area description.</DFTitle>
      <DFType>
        <DDFName/>
      </DFType>
    </DFProperties>

    <Node>
      <NodeName></NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <node/>
        </DFFormat>
        <Occurrence>
          <OneOrMore/>
        </Occurrence>
        <DFType>
          <DDFName></DDFName>
        </DFType>
      </DFProperties>

    <Node>
      <NodeName>Coordinates</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <node/>
        </DFFormat>
        <Occurrence>
          <One/>
        </Occurrence>
        <DFTitle>Descriptions for geographical coordinates</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>

    <Node>
      <NodeName></NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <node/>
        </DFFormat>
        <Occurrence>
          <OneOrMore/>
        </Occurrence>
      </DFProperties>

```

```

        </Occurrence>
        <DFType>
            <DDFName></DDFName>
        </DFType>
    </DFProperties>

    <Node>
        <NodeName>Latitude</NodeName>
        <DFProperties>
            <AccessType>
                <Get/>
                <Replace/>
            </AccessType>
            <DFFormat>
                <bin/>
            </DFFormat>
            <Occurrence>
                <One/>
            </Occurrence>
            <DFTitle>coordinate latitude</DFTitle>
            <DFType>
                <MIME>text/plain</MIME>
            </DFType>
        </DFProperties>
    </Node>

    <Node>
        <NodeName>Longitude</NodeName>
        <DFProperties>
            <AccessType>
                <Get/>
                <Replace/>
            </AccessType>
            <DFFormat>
                <bin/>
            </DFFormat>
            <Occurrence>
                <One/>
            </Occurrence>
            <DFTitle>coordinate longitude</DFTitle>
            <DFType>
                <MIME>text/plain</MIME>
            </DFType>
        </DFProperties>
    </Node>
</Node>
</Node>
</Node>
</Node>
</Node>
</Node>
</Node>
<Node>
    <NodeName>RLOSPreferredPLMNList</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <node/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <Scope>
            <Dynamic/>
        </Scope>
        <DFTitle>List of RLOS preferred PLMNs.</DFTitle>
        <DFType>
            <DDFName/>
        </DFType>
    </DFProperties>

    <Node>
        <NodeName></NodeName>
        <DFProperties>

```

```

    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <node/>
    </DFFormat>
    <Occurrence>
      <OneOrMore/>
    </Occurrence>
    <Scope>
      <Dynamic/>
    </Scope>
    <DFTitle> List of RLOS preferred PLMNs and associated priority.</DFTitle>
    <DFType>
      <DDFName/>
    </DFType>
  </DFProperties>

  <Node>
    <NodeName>PLMN</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <chr/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <DFTitle>PLMN code of the RLOS preferred PLMN.</DFTitle>
      <DFType>
        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>

  <Node>
    <NodeName>PLMNPriority</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <int/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <DFTitle>Priority of the RLOS preferred PLMN.</DFTitle>
      <DFType>
        <DDFName/>
      </DFType>
    </DFProperties>
  </Node>
</Node>

  <Node>
    <NodeName>MfgAssignUERadioCapId</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <node/>
      </DFFormat>
      <Occurrence>
        <ZeroOrOne/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle>List of manufacturer-assigned UE radio capability IDs.</DFTitle>

```

```

    <DFType>
      <DDFName/>
    </DFType>
  </DFProperties>

  <Node>
    <NodeName>Vendor ID</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <chr/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <DFTitle>Vendor ID.</DFTitle>
      <DFType>
        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>

  <Node>
    <NodeName></NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <node/>
      </DFFormat>
      <Occurrence>
        <OneOrMore/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle> List of manufacturer-assigned UE radio capability IDs and associated
radio configurations.</DFTitle>
      <DFType>
        <DDFName/>
      </DFType>
    </DFProperties>

    <Node>
      <NodeName>RCI</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <chr/>
        </DFFormat>
        <Occurrence>
          <One/>
        </Occurrence>
        <DFTitle>Radio Configuration Identifier.</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>

    <Node>
      <NodeName>UERadioConfigLTE</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <bin/>
        </DFFormat>

```

```

        <Occurrence>
          <ZeroOrOne/>
        </Occurrence>
        <DFTitle>UE radio configuration asociated with the RCI encoded as specified
in TS 36.331.</DFTitle>
        <DFType>
          <DDFName/>
        </DFType>
      </DFProperties>
    </Node>

    <Node>
      <NodeName>UERadioConfigNR</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <bin/>
        </DFFormat>
        <Occurrence>
          <ZeroOrOne/>
        </Occurrence>
        <DFTitle>UE radio configuration asociated with the RCI encoded as specified
in TS 38.331.</DFTitle>
        <DFType>
          <DDFName/>
        </DFType>
      </DFProperties>
    </Node>
  </Node>
</Node>

<Node>
  <NodeName>RLOSAllowedMCCList</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <node/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <Scope>
      <Dynamic/>
    </Scope>
    <DFTitle>List of RLOS allowed MCCs.</DFTitle>
    <DFType>
      <DDFName/>
    </DFType>
  </DFProperties>

  <Node>
    <NodeName></NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <node/>
      </DFFormat>
      <Occurrence>
        <OneOrMore/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle> List of RLOS allowed MCCs.</DFTitle>
      <DFType>
        <DDFName/>
      </DFType>
    </DFProperties>
  </Node>

```

```

    <Node>
      <NodeName>MCC</NodeName>
      <DFProperties>
        <AccessType>
          <Get/>
          <Replace/>
        </AccessType>
        <DFFormat>
          <chr/>
        </DFFormat>
        <Occurrence>
          <One/>
        </Occurrence>
        <DFTitle>MCC value of a RLOS allowed MCC.</DFTitle>
        <DFType>
          <MIME>text/plain</MIME>
        </DFType>
      </DFProperties>
    </Node>
  </Node>
</Node>

<Node>
  <NodeName>SNPN_Configuration</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <node/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <Scope>
      <Dynamic/>
    </Scope>
    <DFTitle>Configuration parameters regarding a UE operating in SNPN access operation
mode.</DFTitle>
    <DFType>
      <DDFName/>
    </DFType>
  </DFProperties>

  <Node>
    <NodeName></NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <node/>
      </DFFormat>
      <Occurrence>
        <OneOrMore/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle>List of {SNPN identifier, configuration parameters regarding 3GPP PS
data off and other parameters, for a UE which selected an entry of "list of subscriber data" with
the subscribed SNPN identified by the SNPN identifier</DFTitle>
      <DFType>
        <DDFName/>
      </DFType>
    </DFProperties>

  <Node>
    <NodeName>SNPN_identifier</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <chr/>

```

```

        </DFFormat>
        <Occurrence>
            <One/>
        </Occurrence>
        <DFTitle>SNPN identity of the subscribed SNPN of an entry of "list of
subscriber data", for which the 3GPP_PS_data_off leaf or SM_RetryWaitTime leaf is
applicable.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>3GPP_PS_data_off</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <node/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <Scope>
            <Dynamic/>
        </Scope>
        <DFTitle>Configuration parameters regarding 3GPP PS data off for a UE in the
SNPN identified by the SNPN_identifier leaf.</DFTitle>
        <DFType>
            <DDFName/>
        </DFType>
    </DFProperties>

    <Node>
        <NodeName>Exempted_service_list</NodeName>
        <DFProperties>
            <AccessType>
                <Get/>
                <Replace/>
            </AccessType>
            <DFFormat>
                <node/>
            </DFFormat>
            <Occurrence>
                <One/>
            </Occurrence>
            <Scope>
                <Dynamic/>
            </Scope>
            <DFTitle>List of services which are exempted of 3GPP PS data off for a
UE in the SNPN identified by the SNPN_identifier leaf.</DFTitle>
            <DFType>
                <DDFName/>
            </DFType>
        </DFProperties>

    <Node>
        <NodeName>Device_management_over_PS</NodeName>
        <DFProperties>
            <AccessType>
                <Get/>
                <Replace/>
            </AccessType>
            <DFFormat>
                <bool/>
            </DFFormat>
            <Occurrence>
                <One/>
            </Occurrence>
            <Scope>
                <Dynamic/>
            </Scope>
            <DFTitle>Device management over PS which is a 3GPP PS data off
exempt service for a UE in the SNPN identified by the SNPN_identifier leaf.</DFTitle>
            <DFType>

```

```

        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>

  <Node>
    <NodeName>Bearer_independent_protocol</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <bool/>
      </DFFormat>
      <Occurrence>
        <ZeroOrOne/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle>Bearer_independent_protocol which is a 3GPP PS data off
exempt service for a UE in the SNPN identified by the SNPN_identifier leaf.</DFTitle>
      <DFType>
        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>

  <Node>
    <NodeName>Location_services_over_LCS_UPP</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <bool/>
      </DFFormat>
      <Occurrence>
        <ZeroOrOne/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle>Location services over LCS-UPP which is a 3GPP PS data off
exempt service for a UE in the SNPN identified by the SNPN_identifier leaf.</DFTitle>
      <DFType>
        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>
</Node>

  <Node>
    <NodeName>Exempted_service_list_non_subscribed_SNPN</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <node/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle>List of services which are exempted of 3GPP PS data off for a
UE in non-subscribed SNPN.</DFTitle>
      <DFType>
        <DDFName/>
      </DFType>
    </DFProperties>
  </Node>

```

```

    <NodeName>Device_management_over_PS</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <bool/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle>Device management over PS which is a 3GPP PS data off
exempt service for a UE in non-subscribed SNPN.</DFTitle>
      <DFType>
        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>

  <Node>
    <NodeName>Bearer_independent_protocol</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <bool/>
      </DFFormat>
      <Occurrence>
        <ZeroOrOne/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle>Bearer_independent_protocol which is a 3GPP PS data off
exempt service for a UE in non-subscribed SNPN.</DFTitle>
      <DFType>
        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>

  <Node>
    <NodeName>Location_services_over_LCS_UPP</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <bool/>
      </DFFormat>
      <Occurrence>
        <ZeroOrOne/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle>Location services over LCS-UPP which is a 3GPP PS data off
exempt service for a UE in non-subscribed SNPN.</DFTitle>
      <DFType>
        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>
</Node>

  <Node>
    <NodeName>SM_RetryWaitTime</NodeName>
    <DFProperties>
      <AccessType>

```

```

        <Get/>
        <Replace/>
    </AccessType>
    <DFFormat>
        <int/>
    </DFFormat>
    <Occurrence>
        <ZeroOrOne/>
    </Occurrence>
    <DFTitle> SM_RetryWaitTime for a UE in the SNPN identified by the
SNPN_identifier leaf</DFTitle>
    <DFType>
        <MIME>text/plain</MIME>
    </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>Timer_T3245_Behaviour</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle> Timer_T3245_Behaviour for a UE in the SNPN identified by the
SNPN_identifier leaf</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>MPS_NAIDecoration</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle>NAI decoration for MPS access by UE operating in SNPN operating
mode.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>HPA_NAIDecoration</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle>NAI decoration for HPA access by UE operating in SNPN operating
mode.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>

```

```

    </Node>
  </Node>
</Node>
<Node>
  <nodeName>NoEUTRADisablingIn5GS</nodeName>
  <dfProperties>
    <accessType>
      <get/>
      <replace/>
    </accessType>
    <dfFormat>
      <bool/>
    </dfFormat>
    <occurrence>
      <zeroOrOne/>
    </occurrence>
    <dfTitle> NoEUTRADisablingIn5GS.</dfTitle>
    <dfType>
      <mime>text/plain</mime>
    </dfType>
  </dfProperties>
</Node>
<Node>
  <nodeName>Re_enable_N1_upon_reattach</nodeName>
  <dfProperties>
    <accessType>
      <get/>
      <replace/>
    </accessType>
    <dfFormat>
      <bool/>
    </dfFormat>
    <occurrence>
      <zeroOrOne/>
    </occurrence>
    <dfTitle> Re enable N1 upon reattach.</dfTitle>
    <dfType>
      <mime>text/plain</mime>
    </dfType>
  </dfProperties>
</Node>
<Node>
  <nodeName>CustomLLFailureRetry</nodeName>
  <dfProperties>
    <accessType>
      <get/>
      <replace/>
    </accessType>
    <dfFormat>
      <node/>
    </dfFormat>
    <occurrence>
      <zeroOrOne/>
    </occurrence>
    <dfTitle>Configuration parameters for custom retry in case of lower layer failure to
establish the RRC connection.</dfTitle>
    <dfType>
      <ddfName/>
    </dfType>
  </dfProperties>
  <Node>
    <nodeName>MinRetryTimer</nodeName>
    <dfProperties>
      <accessType>
        <get/>
        <replace/>
      </accessType>
      <dfFormat>
        <int/>
      </dfFormat>
      <occurrence>
        <one/>
      </occurrence>
    </dfProperties>
  </Node>
</Node>

```

```

        <DFTitle>MinRetryTimer.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>MaxRetryTimer</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <int/>
        </DFFormat>
        <Occurrence>
            <One/>
        </Occurrence>
        <DFTitle>MaxRetryTimer.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>MaxMinRetry</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <int/>
        </DFFormat>
        <Occurrence>
            <One/>
        </Occurrence>
        <DFTitle>MaxMinRetry.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>
</Node>

<Node>
    <NodeName>UE_using_SENSE</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle>UE_using_SENSE.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>DefaultNSSAIInclusionMode</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <bool/>
        </DFFormat>

```

```

    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle>DefaultNSSAIInclusionMode.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>

<Node>
  <NodeName>MPS_NAIdecoration</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <bool/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle>NAI decoration for MPS access by UE.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>

<Node>
  <NodeName>HPA_NAIdecoration</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <bool/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle>NAI decoration for HPA access by UE.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>

<Node>
  <NodeName>Satellite_Disabling_Allowed_for_5GMM_cause_#15</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <bool/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle> Satellite_Disabling_Allowed_for_5GMM_cause_#15.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>

<Node>
  <NodeName>Satellite_Disabling_Allowed_for_EMM_cause_#15</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>

```

```

        <bool/>
      </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle> Satellite_Disabling_Allowed_for_EMM_cause_#15.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>

<Node>
  <NodeName>CustomLLFailureRetry5G</NodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <node/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle>Configuration parameters for custom retry in case of lower layer failure to
establish the NR RRC connection.</DFTitle>
    <DFType>
      <DDFName/>
    </DFType>
  </DFProperties>
</Node>

  <Node>
    <NodeName>MinRetryTimer</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <int/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <DFTitle>MinRetryTimer.</DFTitle>
      <DFType>
        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>

  <Node>
    <NodeName>MaxRetryTimer</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <int/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <DFTitle>MaxRetryTimer.</DFTitle>
      <DFType>
        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>

  <Node>
    <NodeName>MaxMinRetry</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>

```

```

        <DFFormat>
          <int/>
        </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <DFTitle>MaxMinRetry.</DFTitle>
      <DFType>
        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>
</Node>

<Node>
  <nodeName>FasterRecovery</nodeName>
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <node/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <DFTitle> Configuration parameters for faster service recovery.</DFTitle>
    <DFType>
      <DDFName/>
    </DFType>
  </DFProperties>

  <Node>
    <nodeName>MaxNumShortTimerStop</nodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <int/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <DFTitle>MaxNumShortTimerStop.</DFTitle>
      <DFType>
        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>

  <Node>
    <nodeName>MaxNumLongTimerReg</nodeName>
    <DFProperties>
      <AccessType>
        <Get/>
        <Replace/>
      </AccessType>
      <DFFormat>
        <int/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <DFTitle>MaxNumLongTimerReg.</DFTitle>
      <DFType>
        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>

  <Node>
    <nodeName>ShortTimerEvent</nodeName>
    <DFProperties>
      <AccessType>
        <Get/>

```

```

        <Replace/>
    </AccessType>
    <DFFormat>
        <int/>
    </DFFormat>
    <Occurrence>
        <ZeroOrOne/>
    </Occurrence>
    <DFTitle>ShortTimerEvent.</DFTitle>
    <DFType>
        <MIME>text/plain</MIME>
    </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>LongTimerEvent</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <int/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle>LongTimerEvent.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>

<Node>
    <NodeName>AccessTechnology</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
            <Replace/>
        </AccessType>
        <DFFormat>
            <int/>
        </DFFormat>
        <Occurrence>
            <One/>
        </Occurrence>
        <DFTitle> AccessTechnology.</DFTitle>
        <DFType>
            <MIME>text/plain</MIME>
        </DFType>
    </DFProperties>
</Node>
</Node>

<Node>
    <NodeName>Ext</NodeName>
    <DFProperties>
        <AccessType>
            <Get/>
        </AccessType>
        <DFFormat>
            <node/>
        </DFFormat>
        <Occurrence>
            <ZeroOrOne/>
        </Occurrence>
        <DFTitle>A collection of all extension objects.</DFTitle>
        <DFType>
            <DDFName/>
        </DFType>
    </DFProperties>
</Node>
</Node>
</MgmtTree>

```

Annex B (informative): Change history

| Change history | | | | | | | |
|----------------|--------|-----------|------|-----|--|--------|--------|
| Date | TSG # | TSG Doc. | CR | Rev | Subject/Comment | Old | New |
| 2010-10 | CT1#67 | | | | Includes the following contribution agreed by CT1: C1-104202 | | 0.1.0 |
| 2010-11 | CT1#68 | | | | Includes the following contribution agreed by CT1: C1-105247 | 0.1.0 | 0.2.0 |
| 2010-12 | CT#50 | CP-100719 | | | V1.0.0 created by MCC for presentation for information at CT-50 | 0.2.0 | 1.0.0 |
| 2010-12 | CT#50 | CP-100888 | | | V1.0.1 TS-number added at CT#50 | 1.0.0 | 1.0.1 |
| 2011-01 | CT1#69 | | | | Includes the following contributions agreed by CT1: C1-110073, C1-110308, C1-110484 | 1.0.1 | 1.1.0 |
| 2011-02 | CT1#70 | | | | Includes the following contributions agreed by CT1: C1-110790; C1-111456 | 1.1.0 | 1.2.0 |
| 2011-03 | CT-51 | CP-110153 | | | Version 2.0.0 created by MCC for presentation to CT-51 for approval | 1.2.0 | 2.0.0 |
| 2011-03 | CT-51 | | | | Version 10.0.0 created by MCC after approval at CT-51 | 2.0.0 | 10.0.0 |
| 2011-06 | CT-52 | CP-110462 | 0001 | 1 | Reference to NAS configuration in USIM | 10.0.0 | 10.1.0 |
| 2011-09 | CT-53 | CP-110695 | 0002 | 1 | Definition of reserved code point | 10.1.0 | 11.0.0 |
| 2012-06 | CT-56 | CP-120315 | 0004 | 2 | Override Low Priority Configuration | 11.0.0 | 11.1.0 |
| 2012-06 | CT-56 | | | | Re-ordering of clauses of clause 5 | 11.1.0 | 11.1.1 |
| 2012-09 | CT-57 | CP-120589 | 0006 | | Correction on overriding configurations | 11.1.1 | 11.2.0 |
| 2013-12 | CT-62 | CP-130762 | 0007 | 3 | Fast higher priority PLMN search upon entering VPLMN | 11.2.0 | 12.0.0 |
| 2014-06 | CT-64 | CP-140331 | 0009 | | Addition of configuration parameter for EMM cause #15 extension | 12.0.0 | 12.1.0 |
| 2014-09 | CT-65 | CP-140643 | 0012 | 1 | "Override_NAS_SignallingLowPriority" and "Override_ExtendedAccessBarring" linkage | 12.1.0 | 12.2.0 |
| 2015-03 | CT-67 | CP-150069 | 0014 | 2 | Addition of UE retry configuration parameter to NAS MO | 12.2.0 | 12.3.0 |
| 2015-06 | CT-68 | CP-150323 | 0017 | 1 | Correcting DDF to be valid XML document | 12.3.0 | 13.0.0 |
| 2015-06 | CT-68 | CP-150329 | 0018 | | Clarification to the applicability of the UE retry wait time value or behaviour | 12.3.0 | 13.0.0 |
| 2015-09 | CT-69 | CP-150511 | 0020 | | NAS MO figure | 13.0.0 | 13.1.0 |
| 2015-12 | CT-70 | CP-150710 | 0021 | 1 | Setting of override EAB and override NSLP leaves | 13.1.0 | 13.2.0 |
| 2016-06 | CT-72 | CP-160309 | 0022 | 6 | UE configuration for exceptional data reporting | 13.2.0 | 13.3.0 |

| Change history | | | | | | | |
|----------------|---------|---------------------------|------|-----|-----|---|-------------|
| Date | Meeting | TDoc | CR | Rev | Cat | Subject/Comment | New version |
| 2016-12 | CT#74 | CP-160738 | 0023 | 2 | B | Addition of default standardized DCN-ID | 14.0.0 |
| 2017-03 | CT#75 | CP-170130 | 0024 | 4 | B | 3GPP PS data off configuration for non-SIP services | 14.1.0 |
| 2017-03 | CT#75 | CP-170122 | 0026 | 3 | F | Resolve DCN-ID length | 14.1.0 |
| 2017-06 | CT#76 | CP-171092 | 0028 | | F | Correction on place of ExceptionDataReportingAllowed leaf | 14.2.0 |
| 2017-06 | CT#76 | CP-171085 | 0029 | | F | Removal of editor's note [WI PS_DATA_OFF-CT CR#0024] on APN(s) list and associated packet filter(s) | 14.2.0 |
| 2017-06 | CT#76 | CP-171085 | 0030 | 1 | F | Removal of editor's note [WI PS_DATA_OFF-CT CR#0024] on the need of updating the DDF | 14.2.0 |
| 2018-06 | CT#80 | CP-181056 | 0031 | 2 | F | Remove default value of exempted BIP service | 14.3.0 |
| 2018-06 | CT#80 | CP-181056 | 0035 | 1 | F | Remove the default value of Device_management_over_PS | 14.3.0 |
| 2018-06 | CT#80 | CP-181056 | 0036 | 2 | F | Correction to Exempted_service_list sub-tree | 14.3.0 |
| 2018-06 | CT#80 | CP-181076 | 0032 | 1 | F | Enabling pre-provisioning of EARFCNs and associated geographical areas for initial cell search of MTC carrier or NB-IOT carrier | 15.0.0 |
| 2018-06 | CT#80 | CP-181074 | 0033 | 3 | B | Enabling 3GPP PS data off in roaming-NAS MO | 15.0.0 |
| 2018-09 | CT#81 | CP-182156 | 0038 | | F | Corrections for invalid DDF | 15.1.0 |
| 2019-03 | CT#83 | CP-190106 | 0040 | 1 | B | SINE_5G: Inter-RAT retry restriction in 5G | 16.0.0 |
| 2019-06 | CT#84 | CP-191144 | 0041 | 1 | B | Configuration of RLOS preferred PLMN list | 16.1.0 |
| 2019-09 | CT#85 | CP-192070 | 0043 | 2 | F | 5GSM cause #27 and #70 for NAS MO SM_RetryWaitTime | 16.2.0 |
| 2019-09 | CT#85 | CP-192069 | 0044 | 1 | B | Provisioning of manufacturer-assigned UE radio capability ID to the UE | 16.2.0 |
| 2020-03 | CT#87e | CP-200125 | 0045 | | C | Finalizing provisioning of manufacturer-assigned UE radio capability IDs at the UE | 16.3.0 |
| 2020-03 | CT#87e | CP-200124 | 0046 | 2 | B | NAS configuration for restriction on access to RLOS | 16.3.0 |
| 2020-03 | CT#87e | CP-200107 | 0048 | 1 | C | MO exception data reporting for NB-IoT in 5G | 16.3.0 |
| 2020-06 | CT#88e | CP-201100 | 0050 | | F | Timer_T3245_Behaviour leaf applicable in 5GS | 16.4.0 |
| 2020-06 | CT#88e | CP-201135 | 0051 | 2 | B | Configuration parameters for a UE operating in SNPN access mode | 16.4.0 |
| 2020-09 | CT#89e | CP-202170 | 0052 | | F | Timer_T3245_Behaviour for SNPN | 16.5.0 |
| 2021-03 | CT#91e | CP-210114 | 0053 | 2 | F | SNPN access operation mode | 16.6.0 |
| 2021-09 | CT#93e | CP-212157 | 0054 | 1 | B | Handling of T3402 to ensure IMS voice availability | 17.0.0 |
| 2021-12 | CT#94e | CP-213034 | 0055 | 1 | F | Correction of SNPN configuration | 17.1.0 |
| 2022-03 | CT#95e | CP-220259 | 0058 | - | F | Correction on noetradisablingin5gs | 17.2.0 |
| 2022-03 | CT#95e | CP-220237 | 0059 | 1 | F | Configuration parameters for UEs supporting access to an SNPN using credentials from CH | 17.2.0 |
| 2022-03 | CT#95e | CP-220237 | 0060 | 1 | F | Configuration parameters for 3GPP PS data off and UE in non-subscribed SNPN | 17.2.0 |
| 2022-03 | CT#95e | CP-220248 | 0062 | 1 | F | Re-activate N1 mode capability upon re-attach procedure - Alt. 4 | 17.2.0 |
| 2022-06 | CT#96 | CP-221223 | 0061 | 2 | F | Allow configurable attach and TAU retries for some lower layer failures | 17.3.0 |
| 2022-12 | CT#98e | CP-223139 | 0065 | 2 | B | NAS configuration MO for using SENSE | 18.0.0 |
| 2023-03 | CT#99 | CP-230249 | 0066 | 1 | F | Updates to NAS Configuration MO for SENSE | 18.1.0 |
| 2023-03 | CT#99 | CP-231232 | 0068 | - | F | Correcting incorrect DDF | 18.2.0 |
| 2023-03 | CT#99 | CP-231217 | 0069 | 1 | F | Default NSSAI inclusion mode pre-configuration | 18.2.0 |
| 2024-06 | CT#104 | CP-241185 | 0072 | 3 | B | MPS for WLAN NAI decoration | 18.3.0 |
| 2024-06 | CT#104 | CP-241163 | 0074 | 1 | F | 5GMM cause code #15 indicating Satellite NG-RAN not allowed in PLMN | 18.3.0 |
| 2024-12 | CT#106 | CP-243200 | 0077 | 3 | C | Adding NAS configuration parameter Satellite_Disabling_Allowed_for_EMM_cause_#15 | 19.0.0 |
| 2025-03 | CT#107 | CP-250142 | 0075 | 7 | F | Add LCS-UPP MO for PS data off | 19.1.0 |
| 2025-06 | CT#108 | CP-251187 | 0078 | 3 | B | Allow configurable 5G registration retries for some lower layer failures | 19.2.0 |
| 2025-06 | CT#108 | CP-251190 | 0080 | 2 | F | Add faster recovery configurations | 19.2.0 |
| 2025-06 | CT#108 | CP-251160 | 0079 | - | F | DDF corrections | 19.2.0 |
| 2025-06 | CT#108 | | | | | Implementation errors fixed | 19.2.1 |
| 2025-09 | CT#109 | CP-252144 | 0083 | - | F | Minor corrections for faster recovery | 19.3.0 |
| 2025-09 | CT#109 | CP-252155 | 0085 | - | F | ShortTimerEvent correction | 19.3.0 |

History

| Document history | | |
|-------------------------|--------------|-------------|
| V19.3.0 | January 2026 | Publication |
| | | |
| | | |
| | | |
| | | |