

# ETSI TS 124 086 V4.0.0 (2001-03)

---

*Technical Specification*

**Universal Mobile Telecommunications System (UMTS);  
Advice of Charge (AOC) supplementary services - Stage 3  
(3GPP TS 24.086 version 4.0.0 Release 4)**

---



---

**Reference**

RTS/TSGN-0424086Uv4

---

**Keywords**

UMTS

**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:  
editor@etsi.fr

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2001.

All rights reserved.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Specification (TS) has been produced by the ETSI 3<sup>rd</sup> Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under [www.etsi.org/key](http://www.etsi.org/key).

---

# Contents

Foreword.....	4
0 Scope .....	5
0.1 References .....	5
0.2 Abbreviations .....	6
1 Advice of Charge (Information) (AoCI) .....	7
1.1 Normal operation with successful outcome .....	7
1.1.1 Call re-establishment .....	7
1.1.2 MS originated call .....	7
1.1.3 MS terminated call .....	7
1.1.4 Change of charging information .....	8
1.2 Normal operation with unsuccessful outcome .....	8
1.3 Activation, deactivation and invocation .....	8
1.4 Interrogation, registration and erasure.....	8
2 Advice of Charge (Charging) (AoCC) .....	8
2.1 Normal operation with successful outcome .....	8
2.1.1 Call re-establishment .....	9
2.1.2 MS originated call .....	9
2.1.3 MS terminated call .....	9
2.1.4 Change of charging information .....	9
2.2 Normal operation with unsuccessful outcome .....	10
2.3 Accumulated Call Meter is equal to or greater than ACMmax .....	10
2.4 Activation, deactivation and invocation .....	10
2.5 Interrogation, registration and erasure.....	10
<b>Annex A (informative): Change history .....</b>	<b>11</b>

---

# Foreword

This Technical Specification has been produced by the 3GPP.

This TS specifies the procedures used at the radio interface for normal operation, registration, erasure, activation, deactivation, invocation and interrogation of charging supplementary services within the 3GPP system.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version 3.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 Indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the specification;

---

## 0 Scope

The present document specifies the procedures used at the radio interface (reference point Um as defined in GSM 04.02) for normal operation, registration, erasure, activation, deactivation, invocation and interrogation of charging supplementary services. The provision and withdrawal of supplementary services is an administrative matter between the mobile subscriber and the service provider and causes no signalling on the radio interface.

In GSM 04.10 the general aspects of the specification of supplementary services at the layer 3 radio interface are given.

GSM 04.80 specifies the formats and coding for the supplementary services.

Definitions and descriptions of supplementary services are given in GSM 02.04 and GSM 02.8x and GSM 02.9x-series. GSM 02.24 and 02.86 are related to the charging supplementary services.

Technical realization of supplementary services is described in GSM 03.11 and GSM 03.8x and GSM 03.9x-series. GSM 03.86 is related to the charging supplementary services.

The procedures for Call Control, Mobility Management and Radio Resource management at the layer 3 radio interface are defined in GSM 04.07 and GSM 04.08.

The following supplementary services belong to the charging supplementary services and are described in the present document:

- Advice of Charge (Information) (AoCI) (clause 1);
- Advice of Charge (Charging) (AoCC) (clause 2).

## 0.1 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] GSM 01.04: "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".
- [2] GSM 02.04: "Digital cellular telecommunications system (Phase 2+); General on supplementary services".
- [3] GSM 02.24: "Digital cellular telecommunications system (Phase 2+); Description of Charge Advice Information (CAI)".
- [4] GSM 02.81: "Digital cellular telecommunications system (Phase 2+); Line identification supplementary services - Stage 1".
- [5] GSM 02.82: "Digital cellular telecommunications system (Phase 2+); Call Forwarding (CF) supplementary services - Stage 1".
- [6] GSM 02.83: "Digital cellular telecommunications system (Phase 2+); Call Waiting (CW) and Call Hold (HOLD) supplementary services - Stage 1".
- [7] GSM 02.84: "Digital cellular telecommunications system (Phase 2+); MultiParty (MPTY) supplementary services - Stage 1".

- [8] GSM 02.85: "Digital cellular telecommunications system (Phase 2+); Closed User Group (CUG) supplementary services - Stage 1".
- [9] GSM 02.86: "Digital cellular telecommunications system (Phase 2+); Advice of Charge (AoC) supplementary services - Stage 1".
- [10] GSM 02.88: "Digital cellular telecommunications system (Phase 2+); Call Barring (CB) supplementary services - Stage 1".
- [11] GSM 02.90: "Digital cellular telecommunications system (Phase 2+); Unstructured Supplementary Services Data (USSD) - Stage 1".
- [12] GSM 03.02: "Digital cellular telecommunications system (Phase 2+); Network architecture".
- [13] GSM 03.11: "Digital cellular telecommunications system (Phase 2+); Technical realization of supplementary services".
- [14] GSM 03.81: "Digital cellular telecommunications system (Phase 2+); Line identification supplementary services - Stage 2".
- [15] GSM 03.82: "Digital cellular telecommunications system (Phase 2+); Call Forwarding (CF) supplementary services - Stage 2".
- [16] GSM 03.83: "Digital cellular telecommunications system (Phase 2+); Call Waiting (CW) and Call Hold (HOLD) supplementary services - Stage 2".
- [17] GSM 03.84: "Digital cellular telecommunications system (Phase 2+); MultiParty (MPTY) supplementary services - Stage 2".
- [18] GSM 03.85: "Digital cellular telecommunications system (Phase 2+); Closed User Group (CUG) supplementary services - Stage 2".
- [19] GSM 03.86: "Digital cellular telecommunications system (Phase 2+); Advice of Charge (AoC) supplementary services - Stage 2".
- [20] GSM 03.88: "Digital cellular telecommunications system (Phase 2+); Call Barring (CB) supplementary services - Stage 2".
- [21] GSM 03.90: "Digital cellular telecommunications system (Phase 2+); Unstructured supplementary services operation - Stage 2".
- [22] GSM 04.02: "Digital cellular telecommunications system (Phase 2+); GSM Public Land Mobile Network (PLMN) access reference configuration".
- [23] GSM 04.07: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface signalling layer 3; General aspects".
- [24] GSM 04.08: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 specification".
- [25] GSM 04.10: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3; Supplementary services specification; General aspects".
- [26] GSM 04.80: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 supplementary services specification; Formats and coding".

## 0.2 Abbreviations

Abbreviations used in the present document are listed in GSM 01.04.

# 1 Advice of Charge (Information) (AoCI)

## 1.1 Normal operation with successful outcome

On every successful request for an applicable telecommunications service, the served Mobile Station (MS) will be provided with charging information.

The network sends the Charge Advice Information (CAI) to the MS according to GSM 02.24, GSM 02.86 and GSM 03.86. With this information the MS is able to calculate the units associated with the requested service in real time. In the case where the served mobile is to be charged for multi party calls, separate processes within the MS are used to calculate units appropriate to each call. For unit calculation, each call is treated in the same way as a normal "two-party" call. Any change in the charging rate during a call may be indicated to the MS.

### 1.1.1 Call re-establishment


When the MS detects a radio link failure, the Chargeable Duration (CDUR) shall be suspended.

If a call re-establishment procedure is attempted, the MS shall resume the CDUR when:

- an MM connection has been successfully completed; and
- a TCH has been successfully seized in the appropriate mode.

### 1.1.2 MS originated call

For an MS originated call, charging information is transferred to the MS as shown in figure 1.1. The charging information is acknowledged in a FACILITY message only if the MS supports the AoCI functionality specified in GSM 02.24 and GSM 02.86. AoCI refers to the Advice of Charge (Information) service.

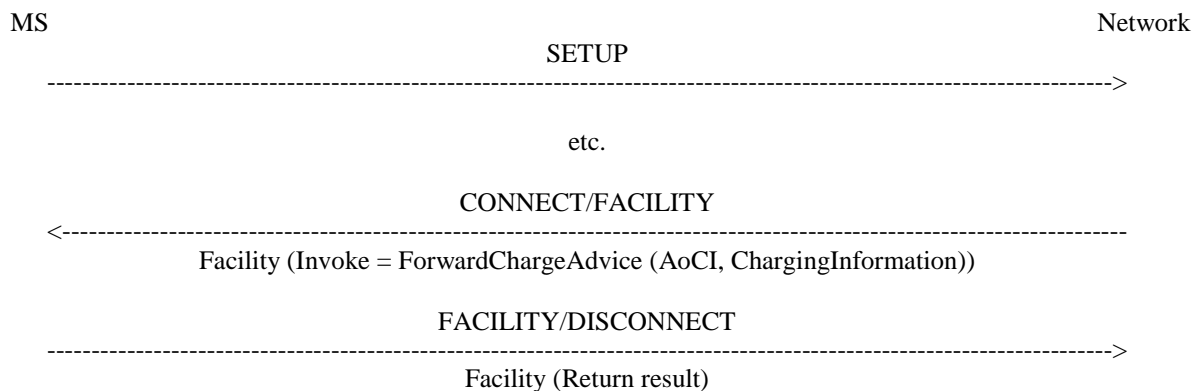


**Figure 1.1: Notification to the served mobile subscriber of the charging information in case of an originated call set up**

### 1.1.3 MS terminated call

For an MS terminated call, where required, charging information is transferred to the MS as shown in figure 1.2. The charging information is acknowledged only if the MS supports the AoCI functionality specified in GSM 02.24 and GSM 02.86.




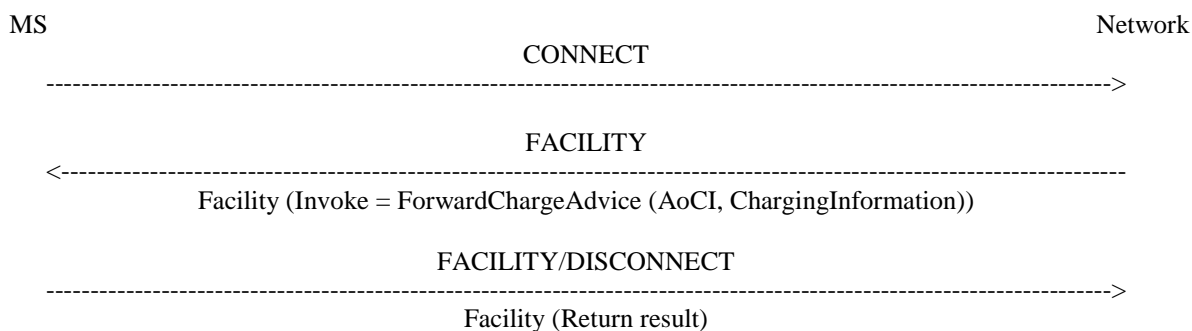

**Figure 1.2: Notification to the served mobile subscriber of the charging information in case of a terminated call set-up**

### 1.1.4 Change of charging information

To inform the MS of a change in charging information the procedure of figure 1.3 is performed. The charging information is acknowledged only if the MS supports the AoCI functionality specified in GSM 02.24 and GSM 02.86.

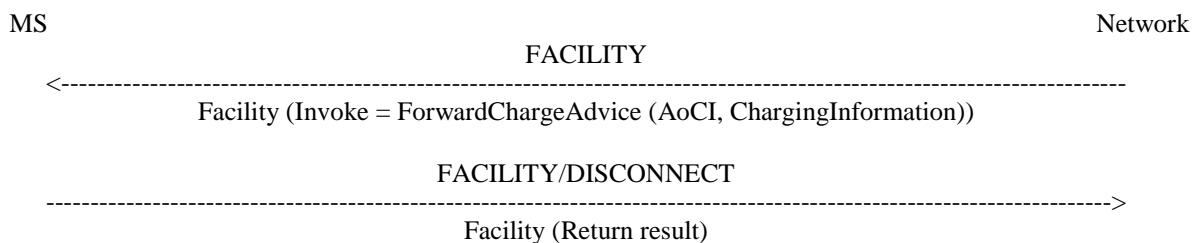

**Figure 1.3: Notification to the served mobile subscriber of a change in the charging information**

## 1.2 Normal operation with unsuccessful outcome

No signalling is performed by the network if a MS fails to acknowledge receipt of charging Information.

## 1.3 Activation, deactivation and invocation

Activation, deactivation and invocation of the Advice of Charge (Information) supplementary service are not applicable.

## 1.4 Interrogation, registration and erasure

Interrogation, registration and erasure of the Advice of Charge (Information) supplementary service are not applicable.

---

## 2 Advice of Charge (Charging) (AoCC)

### 2.1 Normal operation with successful outcome

On every successful request for an applicable telecommunications service, the served MS will be provided with charging information.

The network sends the Charge Advice Information (CAI) to the MS according to GSM 02.24, GSM 02.86 and GSM 03.86. With this information the MS is able to calculate the units associated with the requested service in real time. In the case where the served mobile is to be charged for multi party calls, separate processes within the MS are used to calculate units appropriate to each call. For unit calculation, each call is treated in the same way as a normal "two-party" call. Any change in the charging rate during a call may be indicated to the MS.

### 2.1.1 Call re-establishment


When the MS detects a radio link failure, the Chargeable Duration (CDUR) shall be suspended.

If a call re-establishment procedure is attempted, the MS shall resume the CDUR when:

- an MM connection has been successfully completed; and
- a TCH has been successfully seized in the appropriate mode.

### 2.1.2 MS originated call


For an MS originated call, charging information is transferred to the MS as shown in figure 2.1. The charging information is acknowledged in a FACILITY message only if the MS supports the AoCC functionality specified in GSM 02.24 and GSM 02.86. AoCC refers to the Advice of Charge (Charging) service.

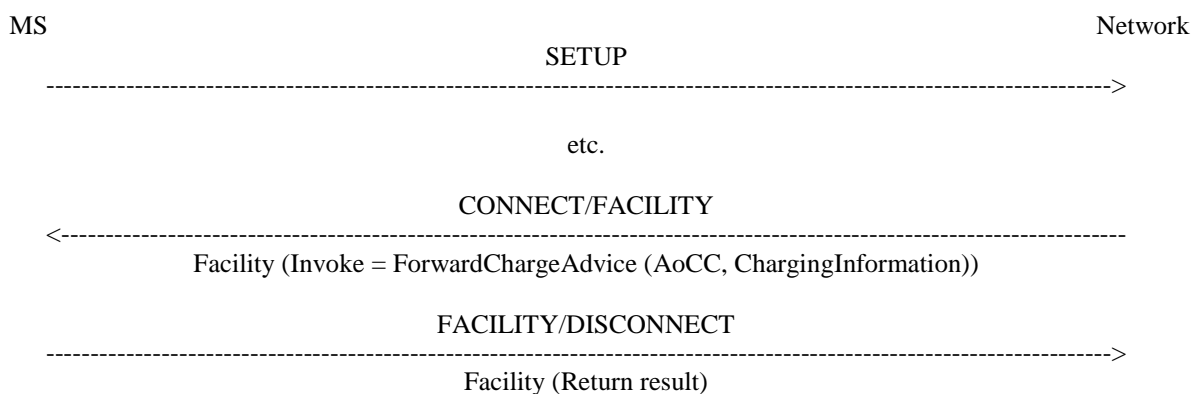

**Figure 2.1: Notification to the served mobile subscriber of the charging information in case of an originated call set up**

### 2.1.3 MS terminated call


For an MS terminated call, where required, charging information is transferred to the MS as shown in figure 2.2. The charging information is acknowledged only if the MS supports the AoCC functionality specified in GSM 02.24 and GSM 02.86.

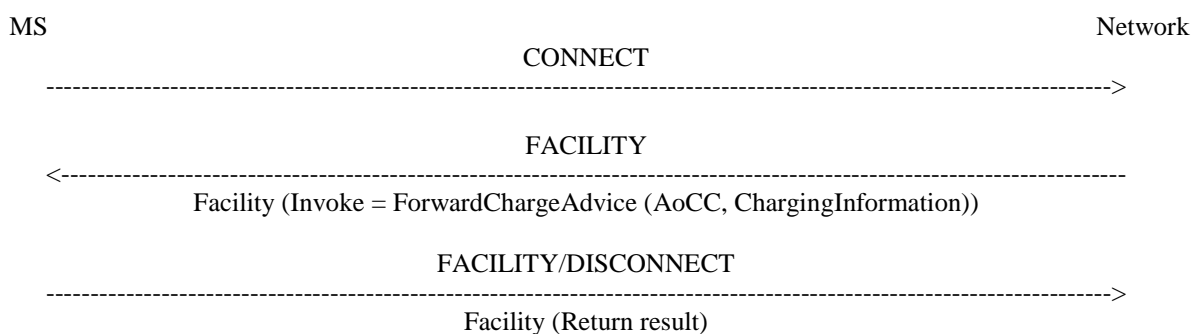

**Figure 2.2: Notification to the served mobile subscriber of the charging information in case of a terminated call set up**

### 2.1.4 Change of charging information


To inform the MS of a change in charging information the procedure of figure 2.3 is performed. The charging information is acknowledged only if the MS supports the AoCC functionality specified in GSM 02.24 and GSM 02.86.

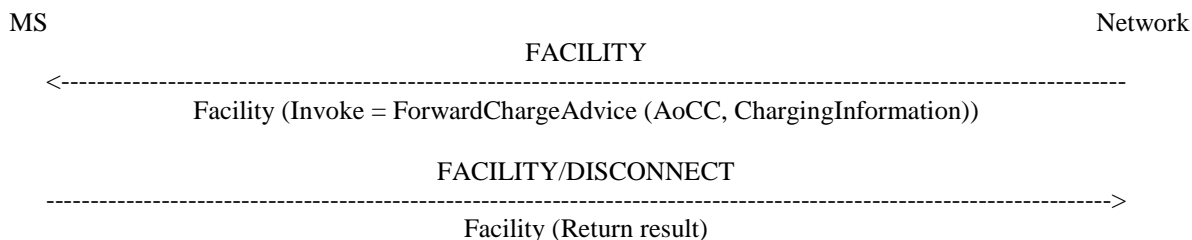

**Figure 2.3: Notification to the served mobile subscriber of a change in the charging information**

## 2.2 Normal operation with unsuccessful outcome


If timer T(AoC) (see GSM 03.86) expires before the Charge Advice Information is acknowledged, the network shall release the call. The MS and network shall act in accordance with GSM 04.08 network initiated call clearing procedures (see figure 2.4).

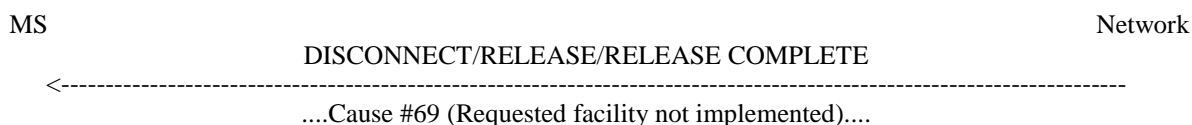

**Figure 2.4: Network release due to unsuccessful operation of Advice of Charge (Charging) service**

## 2.3 Accumulated Call Meter is equal to or greater than ACMmax

If the change stored in the Accumulated Call Meter (ACM) is equal to or greater than the maximum value specified by ACMmax, then the MS shall initiate call clearing giving a specific cause value for this situation as indicated in figure 2.5.

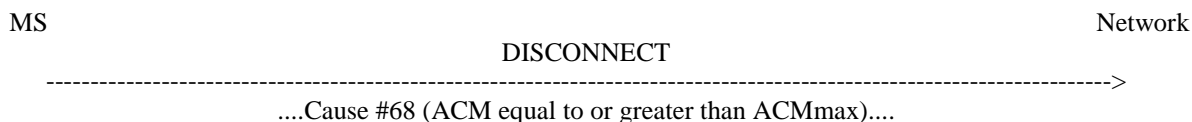

**Figure 2.5: Mobile station releases the call due to ACM being equal to or greater than ACMmax**

## 2.4 Activation, deactivation and invocation

Activation, deactivation and invocation of the Advice of Charge (Charging) supplementary service are not applicable.

## 2.5 Interrogation, registration and erasure

Interrogation, registration and erasure of the Advice of Charge (Charging) supplementary service are not applicable.

---

## Annex A (informative): Change history

Change history						
TSG CN#	Spec	Version	CR	<Phase>	New Version	Subject/Comment
Apr 1999	GSM 04.86	6.0.0				Transferred to 3GPP CN1
CN#03	24.086			R99	3.0.0	Approved at CN#03
CN#11	24.086	3.0.0		Rel-4	4.0.0	Release 4 after CN#11

---

## History

<b>Document history</b>		
V4.0.0	March 2001	Publication