
ETSI TS 124 091 V3.0.0 (2000-01)

Technical Specification

Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); Explicit Call Transfer (ECT) supplementary service - Stage 3 (3G TS 24.091 version 3.0.0 Release 1999)

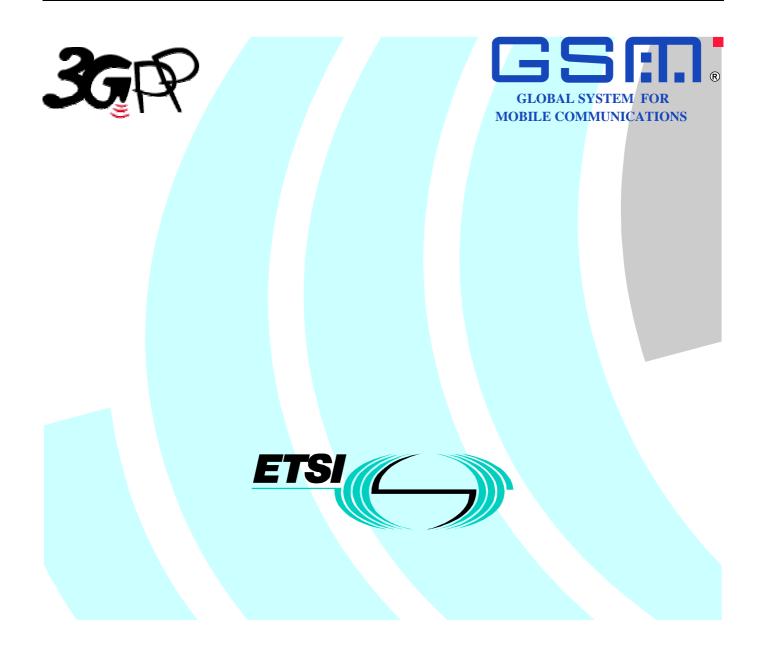

1

Reference DTS/TSGN-SS24091U

> Keywords GSM, UMTS

ETSI

Postal address F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis Valbonne - FRANCE Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16 Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr Individual copies of this ETSI deliverable can be downloaded from http://www.etsi.org If you find errors in the present document, send your comment to: editor@etsi.fr

Important notice

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

> © European Telecommunications Standards Institute 2000. All rights reserved.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://www.etsi.org/ipr).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by the ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables. The mapping of document identities is as follows:

For 3GPP documents:

3G TS | TR nn.nnn "<title>" (with or without the prefix 3G)

is equivalent to

ETSI TS | TR 1nn nnn "[Digital cellular telecommunications system (Phase 2+) (GSM);] Universal Mobile Telecommunications System; <title>

For GSM document identities of type "GSM xx.yy", e.g. GSM 01.04, the corresponding ETSI document identity may be found in the Cross Reference List on <u>www.etsi.org/key</u>

Contents

Forev	Foreword4				
1	Scope	5			
2	References	5			
3	Abbreviations	6			
4	Explicit Call Transfer (ECT)	7			
4.1	Normal operation				
4.2	Explicit Call Transfer invocation				
4.3	Notification to the remote parties				
4.3.1	Notification to the held remote party	8			
4.3.2	Notification to the active or alerting remote party	9			
4.4	Activation and deactivation	9			
4.5	Registration, erasure and interrogation				
5	Support by "old" MSs	9			
5.1	Explicit Call Transfer invocation	9			
5.2	Notification to the remote parties	0			
Anne	Annex A: Change history11				
Histor	ry1	2			

Foreword

This Technical Specification has been produced by the 3GPP.

This TS specifies the procedures used at the radio interface for normal operation, registration, erasure, activation, deactivation, invocation and interrogation of call transfer supplementary services within the 3GPP system.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version 3.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 Indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the specification;

1 Scope

The present document gives the stage 3 description of the call transfer supplementary services.

The present document specifies the procedures used at the radio interface (Reference point Um as defined in GSM 04.02) for normal operation, registration, erasure, activation, deactivation, invocation and interrogation of call transfer supplementary services. Provision and withdrawal of supplementary services is an administrative matter between the mobile subscriber and the service provider and cause no signalling on the radio interface.

In GSM 04.10 the general aspects of the specification of supplementary services at the layer 3 radio interface are given.

GSM 04.80 specifies the formats and coding for the supplementary services.

Definitions and descriptions of supplementary services are given in GSM 02.04, GSM 02.8x and GSM 02.9x-series. GSM 02.91 is related specifically to call transfer supplementary services.

The technical realization of supplementary services is described in GSM 03.11, GSM 03.8x and GSM 03.9x-series. GSM 03.91 is related specifically to call transfer supplementary services.

The procedures for Call Control, Mobility Management and Radio Resource management at the layer 3 radio interface are defined in GSM 04.07 and GSM 04.08.

The following supplementary services belong to the call transfer supplementary services and are described in the present document:

- Explicit Call Transfer (ECT) (see clause 4).

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.
- [1] GSM 01.04: "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".
- [2] GSM 02.04: "Digital cellular telecommunications system (Phase 2+); General on supplementary services".
- [3] GSM 02.30: "Digital cellular telecommunications system (Phase 2+); Man-Machine Interface (MMI) of the Mobile Station (MS)".
- [4] GSM 02.81: "Digital cellular telecommunications system (Phase 2+); Line identification supplementary services Stage 1".
- [5] GSM 02.82: "Digital cellular telecommunications system (Phase 2+); Call Forwarding (CF) supplementary services Stage 1".
- [6] GSM 02.83: "Digital cellular telecommunications system (Phase 2+); Call Waiting (CW) and Call Hold (HOLD) supplementary services Stage 1".
- [7] GSM 02.84: "Digital cellular telecommunications system (Phase 2+); MultiParty (MPTY) supplementary services Stage 1".

5

[8] GSM 02.85: "Digital cellular telecommunications system (Phase 2+); Closed User Group (CUG) supplementary services - Stage 1". [9] GSM 02.86: "Digital cellular telecommunications system (Phase 2+); Advice of Charge (AoC) Supplementary Services - Stage 1". GSM 02.88: "Digital cellular telecommunications system (Phase 2+); Call Barring (CB) [10] supplementary services - Stage 1". GSM 02.90: "Digital cellular telecommunications system (Phase 2+); Unstructured Supplementary [11] Service Data (USSD)- Stage 1". [12] GSM 02.91: "Digital cellular telecommunications system (Phase 2+); Explicit Call Transfer (ECT)". GSM 03.11: "Digital cellular telecommunications system (Phase 2+); Technical realization of [13] supplementary services". GSM 03.81: "Digital cellular telecommunications system (Phase 2+); Line identification [14] supplementary services - Stage 2". GSM 03.82: "Digital cellular telecommunications system (Phase 2+); Call Forwarding (CF) [15] supplementary services - Stage 2". GSM 03.83: "Digital cellular telecommunications system (Phase 2+); Call Waiting (CW) and Call [16] Hold (HOLD) supplementary services - Stage 2". [17] GSM 03.84: "Digital cellular telecommunications system (Phase 2+); MultiParty (MPTY) supplementary services - Stage 2". [18] GSM 03.85: "Digital cellular telecommunications system (Phase 2+); Closed User Group (CUG) supplementary services - Stage 2". GSM 03.86: "Digital cellular telecommunications system (Phase 2+); Advice of Charge (AoC) [19] supplementary services - Stage 2". [20] GSM 03.88: "Digital cellular telecommunications system (Phase 2+); Call Barring (CB) supplementary services - Stage 2". GSM 03.90: "Digital cellular telecommunications system (Phase 2+); Unstructured supplementary [21] services operation - Stage 2". [22] GSM 03.91: "Digital cellular telecommunications system (Phase 2+); Explicit Call Transfer (ECT) supplementary service - Stage 2". [23] GSM 04.02: "Digital cellular telecommunications system (Phase 2+); GSM Public Land Mobile Network (PLMN) access reference configuration". GSM 04.07: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface [24] signalling layer 3; General aspects". GSM 04.08: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface [25] layer 3 specification". [26] GSM 04.10: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3; Supplementary services specification; General aspects".

6

[27] GSM 04.80: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 supplementary services specification; Formats and coding".

3 Abbreviations

The abbreviations used in the present document are listed in GSM 01.04.

4 Explicit Call Transfer (ECT)

4.1 Normal operation

The Explicit Call Transfer (ECT) function should be invoked in association with two existing calls which one is answered and in the held state and the other is answered and active or alerting.

The Mobile Station (MS) invokes the service by sending a FACILITY message to the network containing the ECT request (ECT request). This ECT request indicates to the network that the mobile subscriber wishes the two calls to be connected together. The MS shall not change the basic call state or the auxiliary state of either call when sending ECT request.

The network will normally accept the ECT request and connect the two calls, indicates the success of the ECT request to the served subscriber and disconnect afterwards the served mobile subscriber from both calls (see figure 1).

If the ECT request is not accepted, the network will indicate the error to the served subscriber (see figure 1) and leaves the two calls to the condition it was in prior to the ECT request. The network confirms with the same transaction identifier. The detailed coding of the different error values are specified in GSM 04.80. Which error value is used in which error case is described below.

During the ECT operation the MS shall run a timer T_{ECT} . This timer is started when the operation is sent, and stopped when a response is received from the network. If this timer expires the MS shall assume that the operation has failed, locally release the invokeID, and may re-attempt the operation or inform the user of the failure.

4.2 Explicit Call Transfer invocation

MS		Network
1110	FACILITY (TI A-B/A-C)	
-	Facility (Invoke = ExplicitCT)	>
	DISCONNECT/RELEASE/RELEASE COMPLETE (TI A-B/A-C)	
<	< Facility (Return result)	
	DISCONNECT/RELEASE/RELEASE COMPLETE (TI A-C/A-B)	
	FACILITY (TI A-B/A-C)	
	< Facility (Return error (Error))	
	FACILITY (TI A-B/A-C)	
	< Facility (Reject (Invoke_problem))	
DTE:	A-B/A-C indicates a choice. The Transaction Identifier (TI) used for the invocation of EC the active/answered call or of the held call.	T shall be that of

A-C/A-B indicates the TI of the other call.

Figure 1: Invocation of Explicit Call Transfer

In the following table, the use of the different error values is described:

Error	Error case
IllegalSS-Operation	 operation violates the general rules applicable to the service different calls and either off them or two are not TS 11 (telephony) one or both of the calls are in the wrong call states having only one call or one call is clearing creation of a traffic channel loop
SS-ErrorStatus	- the served subscriber has not subscribed to ECT
SS-NotAvailable	- SS is not available in current location area
SS-Incompatibility	- SS-Interaction violation
FacilityNotSupported	 Facility not supported in VPLMN
SystemFailure	- problems in an entity or network resources
ResourcesNotAvailable	 problems to allocate resources
CallBarred	 contravention with the active barring program

Table 1: Error values

4.3 Notification to the remote parties

If the network received a non-zero SS Screening indicator from the remote party's MS the network shall send a notification to the remote party indicating that the call has been transferred and towards the previously-held party to indicate that he is now retrieved.

If the network did not receive a non-zero SS Screening indicator from the remote party's MS it shall not send a notification.

The content of the Notification Indicator and the Redirection Number in detail is given in GSM 03.91 and the coding in GSM 04.80. For the following it is assumed that the Line Identities of the remote parties are available and allowed to be presented to the remote parties.

4.3.1 Notification to the held remote party

If ECT was invoked in the active state the previous-held remote party will be notified at the invocation of ECT (see figure 2).

MS

FACILITY (TI held call)

Network

Facility (Invoke = NotifySS (SS-Code = HOLD, CallOnHold-Indicator = CallRetrieved), Invoke = NotifySS (SS-Code = ECT, ECT-Indicator (ECT-CallState = active, Rdn = RemotePartyNumber of C)))

Figure 2: Notification of invocation (at active state) to held remote party

If ECT was invoked in the alerting state the previous-held remote party will be notified at the invocation of ECT (figure 3) and again at the receipt of the ANSWER message from the previous-alerting remote party (figure 4).

FACILITY (TI held call)

Network

Facility (Invoke = NotifySS (SS-Code = HOLD, CallOnHold-Indicator = CallRetrieved), Invoke = NotifySS (SS-Code = ECT, ECT-Indicator (ECT-CallState = alerting)))

Figure 3: Notification of invocation (at alerting state) to held remote party

MS

<

/	FACILITY (TI previous held call)	Network
	Facility (Invoke = NotifySS (SS-Code = ECT, ECT-Indicator (ECT-CallState = active, Rdn = RemotePartyNumber of C)))	

Figure 4: Notification to the previous-held remote party at receipt of the ANSWER message by the previous-alerting remote party

4.3.2 Notification to the active or alerting remote party

MS

FACILITY (TI active or alerting call)

Network

Facility (Invoke = NotifySS (SS-Code = ECT, ECT-Indicator (ECT-CallState = active, Rdn = RemotePartyNumber of B)))

Figure 5: Notification of invocation to previous-active or previous-alerting remote party

4.4 Activation and deactivation

Activation and deactivation of ECT cause no signalling on the radio path.

4.5 Registration, erasure and interrogation

Registration, erasure and interrogation of ECT are not applicable.

5 Support by "old" MSs

MSs which do not explicitly support ECT are not precluded from attempting to invoke ECT. It is however, an operator option to support the invocation of ECT by these mobile stations. Where operators support this option, the mechanism employed to offer the ECT service to these MSs shall be USSD. However, it should be noted that it may not be possible using this mechanism to offer the same degree of service to the served subscriber as described in clause 4.

5.1 Explicit Call Transfer invocation

MS A invokes the service by sending a REGISTER message to the network using a call independent supplementary service (SS) transaction, with the facility information element, indicating ProcessUnstructuredSS-Request (the MMI is specified in GSM 02.30).

If the invocation of ECT is successful, then after the SS transaction has been cleared, the network shall release the CC transactions.

If the invocation of ECT is not successful, then the CC transactions shall not be released.

MS		Network
	REGISTER (PD=SS)	>
	Facility (Invoke = ProcessUnstructuredSS-Request (ussd-DataCodingScheme, ussd-String = <ect invocation="" string="">))</ect>	-
,	RELEASE COMPLETE (PD=SS)	
<	Facility (Return Result = ProcessUnstructuredSS-Request (ussd-DataCodingScheme, ussd-String = <successful string="" text="">))</successful>	
<	DISCONNECT/RELEASE/RELEASE COMPLETE (TI=A-B, PD=CC)	
<	DISCONNECT/RELEASE/RELEASE COMPLETE (TI=A-C, PD=CC)	
_	RELEASE COMPLETE (PD=SS)	
<	Facility (Return Result = ProcessUnstructuredSS-Request (ussd-DataCodingScheme, ussd-String = <error string="" text="">))</error>	
,	RELEASE COMPLETE (PD=SS)	
<	Facility (Return error (Error))	
_	RELEASE COMPLETE (PD=SS)	
<-	Facility (Reject (Invoke_problem))	
ор	ne text strings " <successful string="" text="">" and "<error string="" text="">" shall be defined by the perator. Each network shall define only one "<successful string="" text="">" and only one "<error 1.<="" identified="" in="" table="" td=""><td></td></error></successful></error></successful>	

NOTE: The text strings "<Successful Text String>" and "<Error Text String>" shall be defined by the network operator. Each network shall define only one "<Successful Text String>" and only one "<Error Text string>" for each error identified in table 1. For Phase 1 USSD the operation ProcessUnstructuredSS-Request is replaced by ProcessUnstructuredSS-Data.

Figure 6: Invocation of Explicit Call Transfer for non supporting MSs

5.2 Notification to the remote parties

No alternative procedures are defined for sending notifications to remote parties indicating that the call has been transferred.

Annex A: Change history

Change history						
TSG CN#	Spec	Version	CR	<phase></phase>	New Version	Subject/Comment
Apr 1999	GSM 04.91	6.0.0				Transferred to 3GPP CN1
CN#03	24.091				3.0.0	Approved at CN#03

12

History

Document history			
V3.0.0	January 2000	Publication	