

ETSI TS 124 229 V6.5.1 (2005-01)

Technical Specification

**Digital cellular telecommunications system (Phase 2+);
Universal Mobile Telecommunications System (UMTS);
Internet Protocol (IP) multimedia call control protocol
based on Session Initiation Protocol (SIP)
and Session Description Protocol (SDP);
Stage 3
(3GPP TS 24.229 version 6.5.1 Release 6)**



Reference

RTS/TSGN-0124229v651

Keywords

GSM, UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2005.
All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members.
TIPHONTM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Contents

Intellectual Property Rights	2
Foreword.....	2
Foreword.....	10
1 Scope	11
2 References	11
3 Definitions and abbreviations.....	15
3.1 Definitions	15
3.2 Abbreviations	17
3A Interoperability with different IP-CAN.....	18
4 General	18
4.1 Conformance of IM CN subsystem entities to SIP, SDP and other protocols.....	18
4.2 URI and address assignments.....	20
4.2A Transport mechanisms.....	20
4.3 Routeing principles of IM CN subsystem entities.....	20
4.4 Trust domain	20
4.5 Charging correlation principles for IM CN subsystems	21
4.5.1 Overview	21
4.5.2 IM CN subsystem charging identifier (ICID)	21
4.5.3 Access network charging information	22
4.5.3.1 General.....	22
4.5.3.2 Access network charging information.....	22
4.5.4 Inter operator identifier (IOI).....	22
4.5.5 Charging function addresses	22
5 Application usage of SIP	23
5.1 Procedures at the UE	23
5.1.1 Registration and authentication.....	23
5.1.1.1 General	23
5.1.1.1A Parameters contained in the ISIM	23
5.1.1.2 Initial registration.....	24
5.1.1.3 Initial subscription to the registration-state event package	25
5.1.1.4 User-initiated re-registration	25
5.1.1.5 Authentication.....	27
5.1.1.5.1 General	27
5.1.1.5.2 Network-initiated re-authentication.....	28
5.1.1.5.3 Abnormal cases	28
5.1.1.5A Change of Ipv6 address due to privacy	29
5.1.1.6 User-initiated deregistration.....	29
5.1.1.7 Network-initiated deregistration	30
5.1.2 Subscription and notification	31
5.1.2.1 Notification about multiple registered public user identities.....	31
5.1.2.2 General SUBSCRIBE requirements.....	31
5.1.2A Generic procedures applicable to all methods excluding the REGISTER method	31
5.1.2A.1 Mobile-originating case	31
5.1.2A.2 Mobile-terminating case.....	32
5.1.3 Call initiation - mobile originating case.....	33
5.1.3.1 Initial INVITE request	33
5.1.3.1.1 General	33
5.1.3.1.2 "Integration of resource management" required by originating UE	33
5.1.3.1.3 "Integration of resource management" not required by originating UE	34
5.1.4 Call initiation - mobile terminating case.....	34
5.1.4.1 Initial INVITE request	34
5.1.4.1.1 General	34

5.1.4.1.2	"Integration of resource management" required by terminating UE	35
5.1.4.1.3	"Integration of resource management" not required by terminating UE	35
5.1.5	Call release.....	36
5.1.6	Emergency service.....	36
5.1.7	Void	36
5.2	Procedures at the P-CSCF	36
5.2.1	General.....	36
5.2.2	Registration.....	37
5.2.3	Subscription to the user's registration-state event package	40
5.2.4	Registration of multiple public user identities	40
5.2.5	Deregistration	41
5.2.5.1	User-initiated deregistration	41
5.2.5.2	Network-initiated deregistration	41
5.2.6	General treatment for all dialogs and standalone transactions excluding the REGISTER method.....	42
5.2.6.1	Introduction.....	42
5.2.6.2	Determination of mobile-originated or mobile-terminated case	42
5.2.6.3	Requests initiated by the UE	42
5.2.6.4	Requests terminated by the UE	45
5.2.7	Initial INVITE	48
5.2.7.1	Introduction.....	48
5.2.7.2	Mobile-originating case	48
5.2.7.3	Mobile-terminating case.....	49
5.2.7.4	Access network charging information.....	49
5.2.8	Call release.....	50
5.2.8.1	P-CSCF-initiated call release	50
5.2.8.1.1	Cancellation of a session currently being established.....	50
5.2.8.1.2	Release of an existing session	50
5.2.8.1.3	Abnormal cases	50
5.2.8.1.4	Release of the existing dialogs due to registration expiration and deletion of the security association	51
5.2.8.2	Call release initiated by any other entity	51
5.2.8.3	Session expiration	51
5.2.9	Subsequent requests	51
5.2.9.1	Mobile-originating case	51
5.2.9.2	Mobile-terminating case.....	51
5.2.10	Emergency service.....	51
5.2.11	Void	52
5.3	Procedures at the I-CSCF.....	52
5.3.1	Registration procedure.....	52
5.3.1.1	General	52
5.3.1.2	Normal procedures	52
5.3.1.3	Abnormal cases	52
5.3.2	Initial requests.....	53
5.3.2.1	Normal procedures	53
5.3.2.2	Abnormal cases	54
5.3.3	THIG functionality in the I-CSCF(THIG)	55
5.3.3.1	General	55
5.3.3.2	Encryption for topology hiding.....	55
5.3.3.3	Decryption for Topology Hiding.....	56
5.3.4	Void	56
5.4	Procedures at the S-CSCF	56
5.4.1	Registration and authentication.....	56
5.4.1.1	Introduction.....	56
5.4.1.2	Initial registration and user-initiated reregistration	57
5.4.1.2.1	Unprotected REGISTER	57
5.4.1.2.2	Protected REGISTER.....	58
5.4.1.2.3	Abnormal cases	60
5.4.1.3	Authentication and reauthentication.....	60
5.4.1.4	User-initiated deregistration.....	60
5.4.1.5	Network-initiated deregistration	61
5.4.1.6	Network-initiated reauthentication.....	62
5.4.1.7	Notification of Application Servers about registration status	63

5.4.2	Subscription and notification	64
5.4.2.1	Subscriptions to S-CSCF events	64
5.4.2.1.1	Subscription to the event providing registration state.....	64
5.4.2.1.2	Notification about registration state.....	64
5.4.3	General treatment for all dialogs and standalone transactions excluding requests terminated by the S-CSCF	65
5.4.3.1	Determination of mobile-originated or mobile-terminated case	65
5.4.3.2	Requests initiated by the served user	66
5.4.3.3	Requests terminated at the served user.....	68
5.4.3.4	Original dialog identifier	71
5.4.3.5	Void.....	71
5.4.4	Call initiation	71
5.4.4.1	Initial INVITE.....	71
5.4.4.2	Subsequent requests	71
5.4.4.2.1	Mobile-originating case.....	71
5.4.4.2.2	Mobile-terminating case.....	72
5.4.5	Call release.....	72
5.4.5.1	S-CSCF-initiated session release	72
5.4.5.1.1	Cancellation of a session currently being established.....	72
5.4.5.1.2	Release of an existing session	72
5.4.5.1.2A	Release of the existing dialogs due to registration expiration	73
5.4.5.1.3	Abnormal cases	73
5.4.5.2	Session release initiated by any other entity.....	73
5.4.5.3	Session expiration	73
5.4.6	Call-related requests	73
5.4.6.1	ReINVITE.....	73
5.4.6.1.1	Determination of served user.....	73
5.4.6.1.2	Mobile-originating case.....	73
5.4.6.1.3	Mobile-terminating case.....	74
5.4.7	Void.....	74
5.5	Procedures at the MGCF	74
5.5.1	General.....	74
5.5.2	Subscription and notification	74
5.5.3	Call initiation	74
5.5.3.1	Initial INVITE.....	74
5.5.3.1.1	Calls originated from circuit-switched networks.....	74
5.5.3.1.2	Calls terminating in circuit-switched networks	75
5.5.3.2	Subsequent requests	75
5.5.3.2.1	Calls originating in circuit-switched networks	75
5.5.3.2.2	Calls terminating in circuit-switched networks	75
5.5.4	Call release.....	75
5.5.4.1	Call release initiated by a circuit-switched network.....	75
5.5.4.2	IM CN subsystem initiated call release.....	75
5.5.4.3	MGW-initiated call release	76
5.5.5	Call-related requests	76
5.5.5.1	ReINVITE.....	76
5.5.5.1.1	Calls originating from circuit-switched networks	76
5.5.5.1.2	Calls terminating in circuit-switched networks	76
5.5.6	Further initial requests	76
5.6	Procedures at the BGCF	76
5.6.1	General.....	76
5.6.2	Session initiation transaction	76
5.7	Procedures at the Application Server (AS).....	77
5.7.1	Common Application Server (AS) procedures	77
5.7.1.1	Notification about registration status	77
5.7.1.2	Extracting charging correlation information	77
5.7.1.3	Access-Network-Info	77
5.7.1.4	User identify verification at the AS.....	78
5.7.1.5	Request authorization.....	80
5.7.1.6	Event notification throttling	80
5.7.2	Application Server (AS) acting as terminating UA, or redirect server	80
5.7.3	Application Server (AS) acting as originating UA	80

5.7.4	Application Server (AS) acting as a SIP proxy.....	81
5.7.5	Application Server (AS) performing 3rd party call control	81
5.7.5.1	General.....	81
5.7.5.2	Call initiation.....	82
5.7.5.2.1	Initial INVITE.....	82
5.7.5.2.2	Subsequent requests.....	82
5.7.5.3	Call release.....	82
5.7.5.4	Call-related requests.....	82
5.7.5.5	Further initial requests.....	82
5.7.6	Void.....	83
5.8	Procedures at the MRFC	83
5.8.1	General.....	83
5.8.2	Call initiation	83
5.8.2.1	Initial INVITE.....	83
5.8.2.1.1	MRFC-terminating case	83
5.8.2.1.1.1	Introduction.....	83
5.8.2.1.2	MRFC-originating case	84
5.8.2.2	Subsequent requests	84
5.8.2.2.1	Tones and announcements.....	84
5.8.3	Call release.....	84
5.8.3.1	S-CSCF-initiated call release	84
5.8.3.1.1	Tones and announcements.....	84
5.8.3.2	MRFC-initiated call release	84
5.8.3.2.1	Tones and announcements.....	84
5.8.2.2.2	Transcoding	85
5.8.4	Call-related requests	85
5.8.4.1	ReINVITE.....	85
5.8.4.1.1	MRFC-terminating case	85
5.8.4.1.2	MRFC-originating case	85
5.8.4.2	REFER	85
5.8.4.2.1	MRFC-terminating case	85
5.8.4.2.2	MRFC-originating case	85
5.8.4.2.3	REFER initiating a new session	85
5.8.4.2.4	REFER replacing an existing session	85
5.8.4.3	INFO	85
5.8.5	Further initial requests	86
5.9	IMS-ALG	86
5.9.1	General.....	86
6	Application usage of SDP	86
6.1	Procedures at the UE	86
6.2	Procedures at the P-CSCF	88
6.3	Procedures at the S-CSCF	88
6.4	Procedures at the MGCF	89
6.4.1	Calls originating from circuit-switched networks.....	89
6.4.2	Calls terminating in circuit-switched networks.....	89
6.5	Procedures at the MRFC	89
6.6	Procedures at the AS	90
6.7	Procedures at the IMS-ALG.....	90
7	Extensions within the present document	90
7.1	SIP methods defined within the present document.....	90
7.2	SIP headers defined within the present document.....	90
7.2.0	General.....	90
7.2.1	Void	91
7.2.2	Void	91
7.2.3	Void	91
7.2.4	Void	91
7.2.5	Void	91
7.2.6	Void	91
7.2.7	Void	91
7.2.8	Void	91

7.2.9	Void	91
7.2.10	Void	91
7.2A	Extensions to SIP headers defined within the present document.....	91
7.2A.1	Extension to WWW-authenticate header	91
7.2A.1.1	Introduction	91
7.2A.1.2	Syntax.....	91
7.2A.1.3	Operation.....	91
7.2A.2	Extension to Authorization header.....	92
7.2A.2.1	Introduction.....	92
7.2A.2.2	Syntax	92
7.2A.2.3	Operation.....	92
7.2A.3	Tokenized-by parameter definition (various headers)	92
7.2A.3.1	Introduction.....	92
7.2A.3.2	Syntax	92
7.2A.3.3	Operation.....	92
7.2A.4	Void	93
7.2A.5	P-Charging-Vector header	93
7.2A.5.1	Introduction.....	93
7.2A.5.2	Syntax	93
7.2A.5.3	Operation.....	93
7.2A.6	Orig parameter definition.....	93
7.2A.6.1	Introduction.....	93
7.2A.6.2	Syntax	93
7.2A.6.3	Operation.....	93
7.3	Option-tags defined within the present document	93
7.4	Status-codes defined within the present document.....	94
7.5	Session description types defined within the present document.....	94
7.6	3GPP IM CN subsystem XML body, version 1	94
7.6.1	General.....	94
7.6.2	Document Type Definition	94
7.6.3	DTD description	94
7.7	SIP timers	95
7.8	IM CN subsystem timers.....	96
8	SIP compression.....	96
8.1	SIP compression procedures at the UE.....	96
8.1.1	SIP compression	96
8.1.2	Compression of SIP requests and responses transmitted to the P-CSCF	96
8.1.3	Decompression of SIP requests and responses received from the P-CSCF	97
8.2	SIP compression procedures at the P-CSCF.....	97
8.2.1	SIP compression	97
8.2.2	Compression of SIP requests and responses transmitted to the UE	97
8.2.3	Decompression of SIP requests and responses received from the UE	97
9	IP-Connectivity Access Network aspects when connected to the IM CN subsystem.....	98
9.1	Introduction	98
9.2	Procedures at the UE	98
9.2.1	Connecting to the IP-CAN and P-CSCF discovery	98
9.2.2	Handling of the IP-CAN	98
9.2.3	Special requirements applying to forked responses	98
Annex A (normative):	Profiles of IETF RFCs for 3GPP usage	100
A.1	Profiles	100
A.1.1	Relationship to other specifications.....	100
A.1.2	Introduction to methodology within this profile.....	100
A.1.3	Roles.....	101
A.2	Profile definition for the Session Initiation Protocol as used in the present document.....	103
A.2.1	User agent role	103
A.2.1.1	Introduction.....	103
A.2.1.2	Major capabilities	104
A.2.1.3	PDU.....	108

A.2.1.4	PDU parameters	109
A.2.1.4.1	Status-codes	109
A.2.1.4.2	ACK method	111
A.2.1.4.3	BYE method.....	112
A.2.1.4.4	CANCEL method.....	117
A.2.1.4.5	COMET method.....	120
A.2.1.4.6	INFO method	120
A.2.1.4.7	INVITE method	120
A.2.1.4.7A	MESSAGE method	127
A.2.1.4.8	NOTIFY method	133
A.2.1.4.9	OPTIONS method.....	139
A.2.1.4.10	PRACK method	145
A.2.1.4.10A	PUBLISH method.....	150
A.2.1.4.11	REFER method	158
A.2.1.4.12	REGISTER method.....	164
A.2.1.4.13	SUBSCRIBE method.....	171
A.2.1.4.14	UPDATE method.....	178
A.2.2	Proxy role	183
A.2.2.1	Introduction.....	183
A.2.2.2	Major capabilities	184
A.2.2.3	PDUs.....	188
A.2.2.4	PDU parameters	189
A.2.2.4.1	Status-codes	189
A.2.2.4.2	ACK method	191
A.2.2.4.3	BYE method.....	192
A.2.2.4.4	CANCEL method.....	199
A.2.2.4.5	COMET method.....	202
A.2.2.4.6	INFO method	202
A.2.2.4.7	INVITE method	202
A.2.2.4.7A	MESSAGE method	211
A.2.2.4.8	NOTIFY method	217
A.2.2.4.9	OPTIONS method.....	223
A.2.2.4.10	PRACK method	230
A.2.2.4.10A	PUBLISH method.....	235
A.2.2.4.11	REFER method	244
A.2.2.4.12	REGISTER method.....	251
A.2.2.4.13	SUBSCRIBE method.....	258
A.2.2.4.14	UPDATE method.....	265
A.3	Profile definition for the Session Description Protocol as used in the present document	270
A.3.1	Introduction	270
A.3.2	User agent role	271
A.3.2.1	Major capabilities	271
A.3.2.2	SDP types	272
A.3.2.3	SDP types parameters	273
A.3.2.4	SDP types parameters within attribute lines	275
A.3.3	Proxy role	275
A.3.3.1	Major capabilities	276
A.3.3.2	SDP types	276
A.3.3.3	SDP types parameters	277
A.3.3.4	SDP types parameters within attribute lines	279
A.4	Profile definition for other message bodies as used in the present document.....	279
Annex B (normative): IP-Connectivity Access Network specific concepts when using GPRS		
to access IM CN subsystem		
280		
B.1	Scope.....	280
B.2	GPRS aspects when connected to the IM CN subsystem.....	280
B.2.1	Introduction	280
B.2.2	Procedures at the UE	280
B.2.2.1	PDP context activation and P-CSCF discovery	280

B.2.2.1A	Modification of a PDP context used for SIP signalling	281
B.2.2.1B	Re-establishment of the PDP context for signalling	282
B.2.2.2	Session management procedures	282
B.2.2.3	Mobility management procedures.....	282
B.2.2.4	Cell selection and lack of coverage.....	282
B.2.2.5	PDP contexts for media	282
B.2.2.5.1	General requirements	282
B.2.2.5.1A	Activation or modification of PDP contexts for media	282
B.2.2.5.2	Special requirements applying to forked responses	283
B.2.2.5.3	Unsuccessful situations	284
B.3	Application usage of SIP	284
B.3.1	Procedures at the UE	284
B.3.1.1	Additional coding rules for P-Access-Network-Info header.....	284
B.4	3GPP specific encoding for SIP header extensions.....	284
B.4.1	P-Charging-Vector header.....	284
Annex C (normative):	UICC and USIM Aspects for access to the IM CN subsystem.....	286
C.1	Scope	286
C.2	Derivation of IMS parameters from USIM	286
C.3	ISIM Location in 3GPP Systems.....	286
Annex D (informative):	Change history	287
History	303

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document defines a call control protocol for use in the IP Multimedia (IM) Core Network (CN) subsystem based on the Session Initiation Protocol (SIP), and the associated Session Description Protocol (SDP).

The present document is applicable to:

- the interface between the User Equipment (UE) and the Call Session Control Function (CSCF);
- the interface between the CSCF and any other CSCF;
- the interface between the CSCF and an Application Server (AS);
- the interface between the CSCF and the Media Gateway Control Function (MGCF);
- the interface between the S-CSCF and the Multimedia Resource Function Controller (MRFC)
- the interface between the CSCF and the Breakout Gateway Control Function (BGCF);
- the interface between the BGCF and the MGCF;
- the interface between the BGCF and any other BGCF; and
- the interface between the CSCF and an external Multimedia IP network.

Where possible the present document specifies the requirements for this protocol by reference to specifications produced by the IETF within the scope of SIP and SDP. Where this is not possible, extensions to SIP and SDP are defined within the present document. The document has therefore been structured in order to allow both forms of specification.

As the IM CN subsystem is designed to interwork with different IP-Connectivity Access Networks (IP-CANs), the IP-CAN independent aspects of the IM CN subsystem are described in the main body and annex A of this specification. Aspects for connecting a UE to the IM CN subsystem through specific types of IP-CANs are documented separately in the annexes or in separate documents.

NOTE: The present document covers only the usage of SIP and SDP to communicate with the entities of the IM CN subsystem. It is possible, and not precluded, to use the capabilities of IP-CAN to allow a terminal containing a SIP UA to communicate with SIP servers or SIP UAs outside the IM CN subsystem, and therefore utilise the services provided by those SIP servers. The usage of SIP and SDP for communicating with SIP servers or SIP UAs outside the IM CN subsystem is outside the scope of the present document.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.002: "Network architecture".
- [3] 3GPP TS 23.003: "Numbering, addressing and identification".
- [4] 3GPP TS 23.060: "General Packet Radio Service (GPRS); Service description; Stage 2".

- [4A] 3GPP TS 23.107: "Quality of Service (QoS) concept and architecture".
- [5] 3GPP TS 23.218: "IP Multimedia (IM) Session Handling; IM call model".
- [6] 3GPP TS 23.221: "Architectural requirements".
- [7] 3GPP TS 23.228: "IP multimedia subsystem; Stage 2".
- [8] 3GPP TS 24.008: "Mobile radio interface layer 3 specification; Core Network protocols; Stage 3".
- [8A] 3GPP TS 24.141: "Presence service using the IP Multimedia (IM) Core Network (CN) subsystem; Stage 3".
- [8B] 3GPP TS 24.147: "Conferencing using the IP Multimedia (IM) Core Network (CN) subsystem; Stage 3".
- [9] 3GPP TS 25.304: "UE Procedures in Idle Mode and Procedures for Cell Reselection in Connected Mode".
- [9A] 3GPP TS 25.331: "Radio Resource Control (RRC); Protocol Specification".
- [10] 3GPP TS 26.235: "Packet switched conversational multimedia applications; Default codecs".
- [10A] 3GPP TS 27.060: "Mobile Station (MS) supporting Packet Switched Services".
- [11] 3GPP TS 29.061: "Interworking between the Public Land Mobile Network (PLMN) supporting Packet Based Services and Packet Data Networks (PDN)".
- [11A] 3GPP TS 29.162: "Interworking between the IM CN subsystem and IP networks".
- [12] 3GPP TS 29.207: "Policy control over Go interface".
- [13] 3GPP TS 29.208: "End to end Quality of Service (QoS) signalling flows".
- [13A] 3GPP TS 29.209: "Policy control over Gq interface".
- [14] 3GPP TS 29.228: "IP Multimedia (IM) Subsystem Cx and Dx Interfaces; Signalling flows and message contents".
- [15] 3GPP TS 29.229: "Cx and Dx Interfaces based on the Diameter protocol, Protocol details".
- [16] 3GPP TS 32.240: "Telecommunication management; Charging management; Charging architecture and principles".
- [17] 3GPP TS 32.260: "Telecommunication management; Charging management; IP Multimedia Subsystem (IMS) charging".
- [18] 3GPP TS 33.102: "3G Security; Security architecture".
- [19] 3GPP TS 33.203: "Access security for IP based services".
- [19A] 3GPP TS 33.210: "IP Network Layer Security".
- [20] 3GPP TS 44.018: "Mobile radio interface layer 3 specification, Radio Resource Control Protocol".
- [20A] RFC 2401 (November 1998): "Security Architecture for the Internet Protocol".
- [20B] RFC 1594 (March 1994): "FYI on Questions and Answers to Commonly asked "New Internet User" Questions".
- [20C] RFC 2403 (November 1998) "The Use of HMAC-MD5-96 within ESP and AH".
- [20D] RFC 2404 (November 1998) "The Use of HMAC-SHA-1-96 within ESP and AH".
- [20E] RFC 2462 (November 1998): "IPv6 Address Autoconfiguration".
- [21] RFC 2617 (June 1999): "HTTP Authentication: Basic and Digest Access Authentication".

[22] draft-ietf-iptel-rfc2806bis-09 (June 2004): "The tel URI for Telephone Numbers".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

[23] RFC 2833 (May 2000): "RTP Payload for DTMF Digits, Telephony Tones and Telephony Signals".

[24] RFC 3761 (April 2004): "The E.164 to Uniform Resource Identifiers (URI) Dynamic Delegation Discovery System (DDDS) Application (ENUM)".

[25] RFC 2976 (October 2000): "The SIP INFO method".

[25A] RFC 3041 (January 2001): "Privacy Extensions for Stateless Address Autoconfiguration in IPv6".

[26] RFC 3261 (June 2002): "SIP: Session Initiation Protocol".

[27] RFC 3262 (June 2002): "Reliability of provisional responses in Session Initiation Protocol (SIP)".

[28] RFC 3265 (June 2002): "Session Initiation Protocol (SIP) Specific Event Notification".

[29] RFC 3311 (September 2002): "The Session Initiation Protocol (SIP) UPDATE method".

[30] RFC 3312 (October 2002): "Integration of resource management and Session Initiation Protocol (SIP)".

[31] RFC 3313 (January 2003): "Private Session Initiation Protocol (SIP) Extensions for Media Authorization".

[32] RFC 3320 (March 2002): "Signaling Compression (SigComp)".

[33] RFC 3323 (November 2002): "A Privacy Mechanism for the Session Initiation Protocol (SIP)".

[34] RFC 3325 (November 2002): "Private Extensions to the Session Initiation Protocol (SIP) for Network Asserted Identity within Trusted Networks".

[34A] RFC 3326 (December 2002): "The Reason Header Field for the Session Initiation Protocol (SIP)".

[35] RFC 3327 (December 2002): "Session Initiation Protocol Extension Header Field for Registering Non-Adjacent Contacts".

[36] RFC 3515 (April 2003): "The Session Initiation Protocol (SIP) REFER method".

[37] RFC 3420 (November 2002): "Internet Media Type message/sipfrag".

[38] RFC 3608 (October 2003): "Session Initiation Protocol (SIP) Extension Header Field for Service Route Discovery During Registration".

[39] draft-ietf-mmusic-sdp-new-13 (May 2003): "SDP: Session Description Protocol".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

[40] RFC 3315 (July 2003): "Dynamic Host Configuration Protocol for IPv6 (DHCPv6)".

[41] RFC 3319 (July 2003): "Dynamic Host Configuration Protocol (DHCPv6) Options for Session Initiation Protocol (SIP) Servers".

[42] RFC 3485 (February 2003): "The Session Initiation Protocol (SIP) and Session Description Protocol (SDP) static dictionary for Signaling Compression (SigComp)".

[43] RFC 3680 (March 2004): "A Session Initiation Protocol (SIP) Event Package for Registrations".

[44] Void.

[45] Void.

[46] Void.

[47] Void.

- [48] RFC 3329 (January 2003): "Security Mechanism Agreement for the Session Initiation Protocol (SIP)".
- [49] RFC 3310 (September 2002): "Hypertext Transfer Protocol (HTTP) Digest Authentication Using Authentication and Key Agreement (AKA)".
- [50] RFC 3428 (December 2002): "Session Initiation Protocol (SIP) Extension for Instant Messaging".
- [51] Void.
- [52] RFC 3455 (January 2003): "Private Header (P-Header) Extensions to the Session Initiation Protocol (SIP) for the 3rd-Generation Partnership Project (3GPP)".
- [53] RFC 3388 (December 2002): "Grouping of Media Lines in Session Description Protocol".
- [54] RFC 3524 (April 2003): "Mapping of Media Streams to Resource Reservation Flows".
- [55] RFC 3486 (February 2003): "Compressing the Session Initiation Protocol (SIP)".
- [56] RFC 3556 (July 2003): "Session Description Protocol (SDP) Bandwidth Modifiers for RTP Control Protocol (RTCP) Bandwidth".
- [56A] RFC 3581 (August 2003): "An Extension to the Session Initiation Protocol (SIP) for Symmetric Response Routing".
- [56B] RFC 3841 (August 2004): "Caller Preferences for the Session Initiation Protocol (SIP)".
- [57] ITU-T Recommendation E.164: "The international public telecommunication numbering plan".
- [58] draft-ietf-sip-session-timer-15 (November 2004): "Session Timers in the Session Initiation Protocol (SIP)".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

- [59] RFC 3892 (September 2004): "The Session Initiation Protocol (SIP) Referred-By Mechanism".
- [60] RFC 3891 (September 2004): "The Session Initiation Protocol (SIP) "Replaces" Header".
- [61] RFC 3911 (October 2004): "The Session Initiation Protocol (SIP) "Join" Header".
- [62] RFC 3840 (August 2004): "Indicating User Agent Capabilities in the Session Initiation Protocol (SIP)".
- [63] RFC 3861 (August 2004): "Address Resolution for Instant Messaging and Presence".
- [70] RFC 3903 (October 2004): "An Event State Publication Extension to the Session Initiation Protocol (SIP)".
- [71] Void.
- [72] RFC 3857 (August 2004): "A Watcher Information Event Template Package for the Session Initiation Protocol (SIP)".
- [74] RFC 3856 (August 2004): "A Presence Event Package for the Session Initiation Protocol (SIP)".
- [75] draft-ietf-simple-event-list-04 (June 2003): "A Session Initiation Protocol (SIP) Event Notification Extension for Collections".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

- [77] draft-ietf-simple-xcap-package-01 (February 2004): "A Session Initiation Protocol (SIP) Event Package for Modification Events for the Extensible Markup Language (XML) Configuration Access Protocol (XCAP) Managed Documents".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

[78] draft-ietf-sipping-conference-package-03 (February 2004): "A Session Initiation Protocol (SIP) Event Package for Conference State"

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

[79] draft-ietf-rohc-sigcomp-sip-01 (February 2004): "Applying Signaling Compression (SigComp) to the Session Initiation Protocol (SIP)".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

Newly established set of security associations: Two pairs of IPsec security associations that have been created at the UE and/or the P-CSCF after the 200 (OK) response to a REGISTER request was received.

Old set of security associations: Two pairs of IPsec security associations after another set of security associations has been established due to a successful authentication procedure.

Temporary set of security associations: Two pairs of IPsec security associations that have been created at the UE and/or the P-CSCF, after an authentication challenge within a 401 (Unauthorized) response to a REGISTER request was received. The SIP level lifetime of such created security associations will be equal to the value of reg-await-auth timer.

Integrity protected: See 3GPP TS 33.203 [19]. Where a requirement exists to send information "integrity protected" the mechanisms specified in 3GPP TS 33.203 [19] are used for sending the information. Where a requirements exists to check that information was received "integrity protected", then the information received is checked for compliance with the procedures as specified in 3GPP TS 33.203 [19].

For the purposes of the present document, the following terms and definitions given in RFC 1594 [20B].

Fully-Qualified Domain Name (FQDN)

For the purposes of the present document, the following terms and definitions given in RFC 3261 [26] apply (unless otherwise specified see clause 6).

Back-to-Back User Agent (B2BUA)

Client

Dialog

Final response

Header

Header field

Loose routeing

Method

Option-tag (see RFC 3261 [26] subclause 19.2)

Provisional response

Proxy, proxy server

Redirect server

Registrar

Request

Response

Server

Session

(SIP) transaction

Stateful proxy

Stateless proxy

Status-code (see RFC 3261 [26] subclause 7.2)

Tag (see RFC 3261 [26] subclause 19.3)
Target Refresh Request
User agent client (UAC)
User agent server (UAS)
User agent (UA)

For the purposes of the present document, the following terms and definitions given in 3GPP TS 23.002 [2] subclause 4.1.1.1 and subclause 4a.7 apply:

Breakout Gateway Control Function (BGCF)
Call Session Control Function (CSCF)
Home Subscriber Server (HSS)
Media Gateway Control Function (MGCF)
Multimedia Resource Function Controller (MRFC)
Multimedia Resource Function Processor (MRFP)
Subscription Locator Function (SLF)

For the purposes of the present document, the following terms and definitions given in 3GPP TS 23.218 [5] subclause 3.1 apply:

Filter criteria
Initial filter criteria
Initial request
Standalone transaction
Subsequent request

For the purposes of the present document, the following terms and definitions given in 3GPP TS 23.228 [7] subclauses 3.1, 4.3.3.1, 4.3.6, 4.6 and 5.4.12.1 apply:

Interrogating-CSCF (I-CSCF)
IMS Application Level Gateway (IMS-ALG)
IP-Connectivity Access Network (IP-CAN)
Policy Decision Function (PDF)
Private user identity
Proxy-CSCF (P-CSCF)
Public Service Identity (PSI)
Public user identity
Serving-CSCF (S-CSCF)
Statically pre-configured PSI

For the purposes of the present document, the following terms and definitions given in 3GPP TR 33.203 [19] apply:

IM Subscriber Identity Module (ISIM)
Protected server port
Protected client port

For the purposes of the present document, the following terms and definitions given in 3GPP TR 21.905 [1] apply:

Universal Integrated Circuit Card (UICC)
Universal Subscriber Identity Module (USIM)
User Equipment (UE)

For the purposes of the present document, the following terms and definitions given in RFC 2401 [20A] Appendix A apply:

Security association

NOTE: A number of different security associations exist within the IM CN subsystem. Within this document the term specifically applies to the security association that exists between the UE and the P-CSCF, as this is the only security association that has direct impact on SIP.

For the purposes of the present document, the following terms and definitions given in ITU-T E.164 [57] apply:

International public telecommunication number

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

1xx	A status-code in the range 101 through 199, and excluding 100
2xx	A status-code in the range 200 through 299
AS	Application Server
APN	Access Point Name
AUTN	Authentication TokeN
B2BUA	Back-to-Back User Agent
BGCF	Breakout Gateway Control Function
c	conditional
CCF	Charging Collection Function
CDR	Charging Data Record
CK	Ciphering Key
CN	Core Network
CSCF	Call Session Control Function
DHCP	Dynamic Host Configuration Protocol
DNS	Domain Name System
DTD	Document Type Definition
ECF	Event Charging Function
FQDN	Fully Qualified Domain Name
GCID	GPRS Charging Identifier
GGSN	Gateway GPRS Support Node
GPRS	General Packet Radio Service
HSS	Home Subscriber Server
i	irrelevant
I-CSCF	Interrogating CSCF
ICID	IM CN subsystem Charging Identifier
IK	Integrity Key
IM	IP Multimedia
IMS	IP Multimedia core network Subsystem
IMS-ALG	IMS Application Level Gateway
IMSI	International Mobile Subscriber Identity
IOI	Inter Operator Identifier
IP	Internet Protocol
IP-CAN	IP-Connectivity Access Network
IPsec	IP security
IPv4	Internet Protocol version 4
IPv6	Internet Protocol version 6
ISC	IP multimedia Subsystem Service Control
ISIM	IM Subscriber Identity Module
m	mandatory
MAC	Message Authentication Code
MCC	Mobile Country Code
MGCF	Media Gateway Control Function
MGW	Media Gateway
MNC	Mobile Network Code
MRFC	Multimedia Resource Function Controller
MRFP	Multimedia Resource Function Processor
PDP	Packet Data Protocol
PLMN	Public Land Mobile Network
PSTN	Public Switched Telephone Network
n/a	not applicable
NAI	Network Access Identifier
o	optional
P-CSCF	Proxy CSCF
PDU	Protocol Data Unit
PSI	Public Service Identity
RAND	RANDom challenge
RES	RESponse

RTCP	Real-time Transport Control Protocol
RTP	Real-time Transport Protocol
S-CSCF	Serving CSCF
SDP	Session Description Protocol
SIP	Session Initiation Protocol
SLF	Subscription Locator Function
SQN	SeQuence Number
UA	User Agent
UAC	User Agent Client
UAS	User Agent Server
UE	User Equipment
UICC	Universal Integrated Circuit Card
URI	Uniform Resource Identifier
URL	Uniform Resource Locator
UDVM	Universal Decompressor Virtual Machine
USIM	Universal Subscriber Identity Module
x	prohibited
XMAC	expected MAC
XML	eXtensible Markup Language

3A Interoperability with different IP-CAN

The IM CN subsystem can be accessed by UEs resident in different types of IP-CAN. The main body of this document, and annex A, are general to UEs and IM CN subsystems that are accessed using any type of IP-CAN. Requirements that are dependent on the type of IP-CAN are covered in annex B, or in separate specifications.

4 General

4.1 Conformance of IM CN subsystem entities to SIP, SDP and other protocols

SIP defines a number of roles which entities can implement in order to support capabilities. These roles are defined in annex A.

Each IM CN subsystem functional entity using an interface at the Gm reference point, the Mg reference point, the Mi reference point, the Mj reference point, the Mk reference point, the Mm reference point, the Mr reference point and the Mw reference point, and also using the IP multimedia Subsystem Service Control (ISC) Interface, shall implement SIP, as defined by the referenced specifications in Annex A, and in accordance with the constraints and provisions specified in annex A, according to the following roles.

The Gm reference point, the Mg reference point, the Mi reference point, the Mj reference point, the Mk reference point, the Mm reference point and the Mw reference point are defined in 3GPP TS 23.002 [2].

The Mr reference point is defined in 3GPP TS 23.228 [7].

The ISC interface is defined in 3GPP TS 23.228 [7] subclause 4.2.4.

- The User Equipment (UE) shall provide the User Agent (UA) role, with the exceptions and additional capabilities to SIP as described in subclause 5.1, with the exceptions and additional capabilities to SDP as described in subclause 6.1, and with the exceptions and additional capabilities to SigComp as described in subclause 8.1. The UE shall also provide the access dependent procedures described in subclause B.2.2.
- The P-CSCF shall provide the proxy role, with the exceptions and additional capabilities to SIP as described in subclause 5.2, with the exceptions and additional capabilities to SDP as described in subclause 6.2, and with the exceptions and additional capabilities to SigComp as described in subclause 8.2. Under certain circumstances as described in subclause 5.2, the P-CSCF shall provide the UA role with the additional capabilities, as follows:
 - a) when acting as a subscriber to or the recipient of event information; and

- b) when performing P-CSCF initiated dialog-release the P-CSCF shall provide the UA role, even when acting as a proxy for the remainder of the dialog.
- The I-CSCF shall provide the proxy role, with the exceptions and additional capabilities as described in subclause 5.3.
- The S-CSCF shall provide the proxy role, with the exceptions and additional capabilities as described in subclause 5.4, and with the exceptions and additional capabilities to SDP as described in subclause 6.3. Under certain circumstances as described in subclause 5.4, the S-CSCF shall provide the UA role with the additional capabilities, as follows:
 - a) the S-CSCF shall also act as a registrar. When acting as a registrar, or for the purposes of executing a third-party registration, the S-CSCF shall provide the UA role;
 - b) as the notifier of event information the S-CSCF shall provide the UA role;
 - c) when providing a messaging mechanism by sending the MESSAGE method, the S-CSCF shall provide the UA role; and
 - d) when performing S-CSCF initiated dialog release the S-CSCF shall provide the UA role, even when acting as a proxy for the remainder of the dialog.
- The MGCF shall provide the UA role, with the exceptions and additional capabilities as described in subclause 5.5, and with the exceptions and additional capabilities to SDP as described in subclause 6.4.
- The BGCF shall provided the proxy role, with the exceptions and additional capabilities as described in subclause 5.6.
- The AS, acting as terminating UA, or redirect server (as defined in 3GPP TS 23.218 [5] subclause 9.1.1.1), shall provide the UA role, with the exceptions and additional capabilities as described in subclause 5.7.2, and with the exceptions and additional capabilities to SDP as described in subclause 6.6.
- The AS, acting as originating UA (as defined in 3GPP TS 23.218 [5] subclause 9.1.1.2), shall provide the UA role, with the exceptions and additional capabilities as described in subclause 5.7.3, and with the exceptions and additional capabilities to SDP as described in subclause 6.6.
- The AS, acting as a SIP proxy (as defined in 3GPP TS 23.218 [5] subclause 9.1.1.3), shall provided the proxy role, with the exceptions and additional capabilities as described in subclause 5.7.4.
- The AS, performing 3rd party call control (as defined in 3GPP TS 23.218 [5] subclause 9.1.1.4), shall provide the UA role, with the exceptions and additional capabilities as described in subclause 5.7.5, and with the exceptions and additional capabilities to SDP as described in subclause 6.6.

NOTE 1: Subclause 5.7 and its subclauses define only the requirements on the AS that relate to SIP. Other requirements are defined in 3GPP TS 23.218 [5].

- The AS, receiving third-party registration requests, shall provide the UA role, with the exceptions and additional capabilities as described in subclause 5.7.
- The MRFC shall provide the UA role, with the exceptions and additional capabilities as described in subclause 5.8, and with the exceptions and additional capabilities to SDP as described in subclause 6.5.
- The IMS-ALG shall provide the UA role, with the exceptions and additional capabilities as described in subclause 5.9, and with the exceptions and additional capabilities to SDP as described in subclause 6.5.

NOTE 2: Annex A can change the status of requirements in referenced specifications. Particular attention is drawn to table A.4 and table A.162 for capabilities within referenced SIP specifications, and to table A.317 and table A.328 for capabilities within referenced SDP specifications. The remaining tables build on these initial tables.

NOTE 3: The allocated roles defined in this clause are the starting point of the requirements from the IETF SIP specifications, and are then the basis for the description of further requirements. Some of these extra requirements formally change the proxy role into a B2BUA. In all other respects other than those more completely described in subclause 5.2a P-CSCF implements proxy requirements. Despite being a B2BUA a P-CSCF does not implement UA requirements from the IETF RFCs, except as indicated in this specification, e.g., relating to registration event subscription.

4.2 URI and address assignments

In order for SIP and SDP to operate, the following preconditions apply:

- 1) I-CSCFs used in registration are allocated SIP URIs. Other IM CN subsystem entities may be allocated SIP URIs. For example sip:pcscf.home1.net and sip:<impl-specific-info>@pcscf.home1.net are valid SIP URIs. If the user part exists, it is an essential part of the address and shall not be omitted when copying or moving the address. How these addresses are assigned to the logical entities is up to the network operator. For example, a single SIP URI may be assigned to all I-CSCFs, and the load shared between various physical boxes by underlying IP capabilities, or separate SIP URIs may be assigned to each I-CSCF, and the load shared between various physical boxes using DNS SRV capabilities.
- 2) All IM CN subsystem entities are allocated IPv6 addresses in accordance with the constraints specified in 3GPP TS 23.221 [6] subclause 5.1.
- 3) The subscriber is allocated a private user identity by the home network operator, and this is contained within the ISIM application, if present. Where no ISIM application is present but USIM is present, the private user identity is derived (see subclause 5.1.1.1A). This private user identity is available to the SIP application within the UE.

NOTE: The SIP URIs may be resolved by using any of public DNSs, private DNSs, or peer-to-peer agreements.

- 4) The subscriber is allocated one or more public user identities by the home network operator. The public user identity shall take the form of SIP URI as specified in RFC 3261 [26] or TEL URL as specified in draft-ietf-iptel-rfc2806bis-09 [22]. At least one of these is SIP URI and it is contained within the ISIM application, if ISIM application is present. Where no ISIM application is present but USIM is present, the UE derives a temporary public user identity (see subclause 5.1.1.1A). All registered public user identities are available to the SIP application within the UE, after registration.
- 5) The public user identities may be shared across multiple UEs. A particular public user identity may be simultaneously registered from multiple UEs that use different private user identities and different contact addresses. When reregistering and deregistering a given public user identity and associated contact address, the UE will use the same private user identity that it has used during the initial registration of the respective public user identity and associated contact address.
- 6) For the purpose of access to the IM CN subsystem, UEs are assigned IPv6 prefixes in accordance with the constraints specified in 3GPP TS 23.221 [6] subclause 5.1 (see subclause 9.2.1 for the assignment procedures).

4.2A Transport mechanisms

This document makes no requirement on the transport protocol used to transfer signalling information over and above that specified in RFC 3261 [26] clause 18. However, the UE and IM CN subsystem entities shall transport SIP messages longer than 1300 bytes according to the procedures of RFC 3261 [26] subclause 18.1.1, even if a mechanism exists of discovering a maximum transmission unit size longer than 1500 bytes.

4.3 Routing principles of IM CN subsystem entities

Each IM CN subsystem functional entity shall apply loose routing policy as described in RFC 3261 [26], when processing a SIP request. In cases where the I-CSCF or the S-CSCF may interact with strict routers in non IM CN subsystem networks, the routing procedures defined in RFC 3261 [26] that ensure interoperability with strict routers shall be used by the I-CSCF and S-CSCF.

4.4 Trust domain

RFC 3325 [34] provides for the existence and trust of an asserted identity within a trust domain. For the IM CN subsystem, this trust domain consists of the functional entities that belong to the same operator's domain (P-CSCF, the I-CSCF, the S-CSCF, the BGCF, the MGCF, the MRFC, and all ASs that are not provided by third-party service providers). Additionally, other IMS nodes that are not part of the same operator's domain may or may not be part of the trust domain, depending on whether an interconnect agreement exists with the remote network. SIP functional entities that belong to a network for which there is an interconnect agreement are part of the trust domain. ASs provided by third-party service providers are outside the trust domain. SIP functional entities within the trust domain will need to

take an action on the removal of the P-Asserted-Identity header when SIP signalling crosses the boundary of the trust domain.

Editor's Note: the exact mechanism to determine which nodes are part of the trust domain and which nodes are not, is FFS.

For the purpose of the P-Access-Network-Info header, a trust domain also applies. This trust domain is identical to that of the P-Asserted-Identity. For the P-Access-Network-Info header, subclause 5.4 also identifies additional cases for the removal of the header.

NOTE: In addition to the procedures specified in clause 5, procedures of RFC 3325 [34] in relation to transmission of P-Asserted-Identity headers and their contents outside the trust domain also apply.

4.5 Charging correlation principles for IM CN subsystems

4.5.1 Overview

This subclause describes charging correlation principles to aid with the readability of charging related procedures in clause 5. See 3GPP TS 32.240 [16] and 3GPP TS 32.260 [17] for further information on charging.

The IM CN subsystem generates and retrieves the following charging correlation information for later use with offline and online charging:

1. IM CN subsystem Charging Identifier (ICID);
2. Access network charging information;
3. Inter Operator Identifier (IOI);
4. Charging function addresses:
 - a. Charging Collection Function (CCF);
 - b. Event Charging Function (ECF).

How to use and where to generate the parameters in IM CN subsystems are described further in the subclauses that follow. The charging correlation information is encoded in the P-Charging-Vector header as defined in subclause 7.2A.5. The P-Charging-Vector header contains the following parameters: icid, access network charging information and ioi.

The offline and online charging function addresses are encoded in the P-Charging-Function-Addresses as defined in RFC 3455 [52]. The P-Charging-Function-Addresses header contains the following parameters: CCF and ECF.

4.5.2 IM CN subsystem charging identifier (ICID)

The ICID is the session level data shared among the IM CN subsystem entities including ASs in both the calling and called IM CN subsystems. The ICID is used also for session unrelated messages (e.g. SUBSCRIBE request, NOTIFY request, MESSAGE request) for the correlation with CDRs generated among the IM CN subsystem entities.

The first IM CN subsystem entity involved in a dialog (session) or standalone (non-session) method will generate the ICID and include it in the icid parameter of the P-Charging-Vector header in the SIP request. See 3GPP TS 32.260 [17] for requirements on the format of ICID. The P-CSCF will generate an ICID for mobile-originated calls. The I-CSCF will generate an ICID for mobile-terminated calls if there is no ICID received in the initial request (e.g. the calling party network does not behave as an IM CN subsystem). The AS will generate an ICID when acting as an originating UA. The MGCF will generate an ICID for PSTN/PLMN originated calls. Each entity that processes the SIP request will extract the ICID for possible later use in a CDR. The I-CSCF and S-CSCF are also allowed to generate a new ICID for mobile terminated calls received from another network.

There is also an ICID generated by the P-CSCF with a REGISTER request that is passed in a unique instance of P-Charging-Vector header. The valid duration of the ICID is specified in 3GPP TS 32.260 [17].

The icid parameter is included in any requests that include the P-Charging-Vector header. However, the P-Charging-Vector (and ICID) is not passed to the UE.

The ICID is also passed from the P-CSCF to the IP-CAN via PDF. The interface supporting this operation is outside the scope of this document.

4.5.3 Access network charging information

4.5.3.1 General

The access network charging information are the media flow level data shared among the IM CN subsystem entities for one side of the session (either the calling or called side). GPRS charging information (GGSN identifier and PDP context information) is an example of access network charging information.

4.5.3.2 Access network charging information

The IP-CAN provides the access network charging information to the IM CN subsystem. This information is used to correlate IP-CAN CDRs with IM CN subsystem CDRs, i.e. the access network charging information is used to correlate the bearer level with the session level.

The access network charging information is generated at the first opportunity after the resources are allocated at the IP-CAN. The access network charging information is passed from IP-CAN to P-CSCF via PDF, over the Go and Gq interfaces. Access network charging information will be updated with new information during the session as media flows are added or removed. The P-CSCF provides the access network charging information to the S-CSCF. The S-CSCF may also pass the information to an AS, which may be needed for online pre-pay applications. The access network charging information for the originating network is used only within that network, and similarly the access network charging information for the terminating network is used only within that network. Thus the access network charging information are not shared between the calling and called networks. The access network charging information is not passed towards the external ASs from its own network.

The access network charging information is populated in the P-Charging-Vector header.

4.5.4 Inter operator identifier (IOI)

The Inter Operator Identifier (IOI) is a globally unique identifier to share between operator networks/service providers/content providers. There are two possible instances of an IOI to be exchanged between networks/service providers/content providers: one for the originating side, orig-ioi, and one for the terminating side, term-ioi.

The S-CSCF in the originating network populates the orig-ioi parameter of the P-Charging-Vector header in the initial request, which identifies the operator network from which the request originated. Also in the initial request, the term-ioi parameter is left out of the P-Charging-Vector header. The S-CSCF in the originating network retrieves the term-ioi parameter from the P-Charging-Vector header within the message sent in response to the initial request, which identifies the operator network from which the response was sent.

The S-CSCF in the terminating network retrieves the orig-ioi parameter from the P-Charging-Vector header in the initial request, which identifies the operator network from which the request originated. The S-CSCF in the terminating network populates the term-ioi parameter of the P-Charging-Vector header in the response to the initial request, which identifies the operator network from which the response was sent.

The MGCF takes responsibility for populating the orig-ioi parameter when a call/session is originated from the PSTN/PLMN. The MGCF takes responsibility for populating the term-ioi parameter when a call/session is terminated at the PSTN/PLMN.

IOIs will not be passed along within the network, except when proxied by BGCF and I-CSCF to get to MGCF and S-CSCF. However, IOIs will be sent to the AS for accounting purposes.

4.5.5 Charging function addresses

Charging function addresses are distributed to each of the IM CN subsystem entities in the home network for one side of the session (either the calling or called side) and are to provide a common location for each entity to send charging information. Charging Collection Function (CCF) addresses are used for offline billing. Event Charging Function (ECF) addresses are used for online billing.

There may be multiple addresses for CCF and ECF addresses populated into the P-Charging-Function-Addresses header of the SIP request or response. The parameters are *ccf* and *ecf*. Only one instance of *ccf* is required. Additional *ccf* addresses may be included by each network for redundancy purposes, but the first instance of *ccf* is the primary address. If *ecf* address is included for online charging, then additional instances may also be included for redundancy.

The CCF addresses and ECF addresses are retrieved from an Home Subscriber Server (HSS) via the Cx interface and passed by the S-CSCF to subsequent entities. The charging function addresses are passed from the S-CSCF to the IM CN subsystem entities in its home network, but are not passed to the visited network or the UE. When the P-CSCF is allocated in the visited network, then the charging function addresses are obtained by means outside the scope of this document. The AS receives the charging function addresses from the S-CSCF via the ISC interface. CCF and/or ECF addresses may be allocated as locally preconfigured addresses. The AS may also retrieve the charging function address from the HSS via Sh interface.

5 Application usage of SIP

5.1 Procedures at the UE

5.1.1 Registration and authentication

5.1.1.1 General

The UE shall register public user identities (see table A.4/1 and dependencies on that major capability).

In case a UE registers several public user identities at different points in time, the procedures to re-register, deregister and subscribe to the registration-state event package for these public user identities can remain uncoordinated in time.

5.1.1.1A Parameters contained in the ISIM

The ISIM application shall always be used for IMS authentication, if it is present, as described in 3GPP TS 33.203 [19].

The ISIM is preconfigured with all the necessary parameters to initiate the registration to the IM CN subsystem. These parameters include:

- the private user identity;
- one or more public user identities; and
- the home network domain name used to address the SIP REGISTER request

In case the UE is loaded with a UICC that does not contain the ISIM application, the UE shall:

- generate a private user identity;
- generate a temporary public user identity; and
- generate a home network domain name to address the SIP REGISTER request to;

in accordance with the procedures in clause C.2.

The temporary public user identity is only used in REGISTER requests, i.e. initial registration, re-registration, mobile-initiated deregistration. After a successful registration, the UE will get the associated public user identities, and the UE may use any of them in subsequent non-REGISTER requests.

The UE shall not reveal to the user the temporary public user identity if the temporary public user identity is barred. The temporary public user identity is not barred if received by the UE in the P-Associated-URI header.

If the UE is unable to derive the parameters in this subclause for any reason, then the UE shall not proceed with the request associated with the use of these parameters and will not be able to register to the IM CN subsystem.

5.1.1.2 Initial registration

The UE can register a public user identity with its contact address at any time after it has acquired an IP address, discovered a P-CSCF, and established an IP-CAN bearer that can be used for SIP signalling. However, the UE shall only initiate a new registration procedure when it has received a final response from the registrar for the ongoing registration, or the previous REGISTER request has timed out.

A REGISTER request may be protected using a security association, see 3GPP TS 33.203 [19], established as a result of an earlier registration.

The UE shall extract or derive a public user identity, the private user identity, and the domain name to be used in the Request-URI in the registration, according to the procedures described in subclause 5.1.1.1A. A public user identity may be input by the end user.

On sending a REGISTER request, the UE shall populate the header fields as follows:

- a) the Authorization header, with the username field, set to the value of the private user identity;
- b) the From header set to the SIP URI that contains the public user identity to be registered;
- c) the To header set to the SIP URI that contains the public user identity to be registered;
- d) the Contact header set to include SIP URI(s) containing the IP address of the UE in the hostport parameter or FQDN. If the REGISTER request is protected by a security association, the UE shall also include the protected server port value in the hostport parameter;
- e) the Via header containing the IP address or FQDN of the UE in the sent-by field. If the REGISTER request is protected by a security association, the UE shall also include the protected server port value in the sent-by field

NOTE 1: If the UE specifies its FQDN in the host parameter in the Contact header and in the sent-by field in the Via header, then it has to ensure that the given FQDN will resolve (e.g., by reverse DNS lookup) to the IP address that is bound to the security association.

NOTE 2: The UE associates two ports, a protected client port and a protected server port, with each pair of security association. For details on the selection of the protected port value see 3GPP TS 33.203 [19].

- f) the Expires header, or the expires parameter within the Contact header, set to the value of 600 000 seconds as the value desired for the duration of the registration;

NOTE 3: The registrar (S-CSCF) might decrease the duration of the registration in accordance with network policy. Registration attempts with a registration period of less than a predefined minimum value defined in the registrar will be rejected with a 423 (Interval Too Brief) response.

- g) a Request-URI set to the SIP URI of the domain name of the home network;
- h) the Security-Client header field set to specify the security mechanism the UE supports, the IPsec layer algorithms the UE supports and the parameters needed for the security association setup. The UE shall support the setup of two pairs of security associations as defined in 3GPP TS 33.203 [19]. The syntax of the parameters needed for the security association setup is specified in Annex H of 3GPP TS 33.203 [19]. The UE shall support the "ipsec-3gpp" security mechanism, as specified in RFC 3329 [48]. The UE shall support the HMAC-MD5-96 (RFC 2403 [20C]) and HMAC-SHA-1-96 (RFC 2404 [20D]) IPsec layer algorithms, and shall announce support for them according to the procedures defined in RFC 3329 [48];
- i) the Supported header containing the option tag "path"; and
- j) if a security association exists, a P-Access-Network-Info header set as specified for the access network technology (for GPRS see subclause B.3).

On receiving the 200 (OK) response to the REGISTER request, the UE shall:

- a) store the expiration time of the registration for the public user identities found in the To header value;
- b) store the list of URIs contained in the P-Associated-URI header value. This list contains the URIs that are associated to the registered public user identity;
- c) store as the default public user identity the first URI on the list of URIs present in the P-Associated-URI header;

- d) treat the identity under registration as a barred public user identity, if it is not included in the P-Associated-URI header;
- e) store the list of Service-Route headers contained in the Service-Route header, in order to build a proper preloaded Route header value for new dialogs and standalone transactions; and
- f) set the security association lifetime to the longest of either the previously existing security association lifetime (if available), or the lifetime of the just completed registration plus 30 seconds.

When a 401 (Unauthorized) response to a REGISTER is received the UE shall behave as described in subclause 5.1.1.5.1.

On receiving a 423 (Interval Too Brief) too brief response to the REGISTER request, the UE shall:

- send another REGISTER request populating the Expires header or the expires parameter with an expiration timer of at least the value received in the Min-Expires header of the 423 (Interval Too Brief) response.

5.1.1.3 Initial subscription to the registration-state event package

Upon receipt of a 2xx response to the initial registration, the UE shall subscribe to the reg event package for the public user identity registered at the users registrar (S-CSCF) as described in RFC 3680 [43].

The UE shall use the default public user identity for subscription to the registration-state event package, if the public user identity that was used for initial registration is a barred public user identity. The UE may use either the default public user identity or the public user identity used for initial registration for the subscription to the registration-state event package, if the initial public user identity that was used for initial registration is not barred.

On sending a SUBSCRIBE request, the UE shall populate the header fields as follows:

- a) a Request URI set to the resource to which the UE wants to be subscribed to, i.e. to a SIP URI that contains the public user identity used for subscription;
- b) a From header set to a SIP URI that contains the public user identity used for subscription;
- c) a To header set to a SIP URI that contains the public user identity used for subscription;
- d) an Event header set to the "reg" event package;
- e) an Expires header set to 600 000 seconds as the value desired for the duration of the subscription
- f) a P-Access-Network-Info header set as specified for the access network technology (for GPRS see subclause B.3); and
- g) a Contact header set to contain the same IP address or FQDN, and with the protected server port value as in the initial registration.

Upon receipt of a 2xx response to the SUBSCRIBE request, the UE shall store the information for the established dialog and the expiration time as indicated in the Expires header of the received response.

If continued subscription is required the UE shall automatically refresh the subscription by the reg event package, for a previously registered public user identity, either 600 seconds before the expiration time if the initial subscription was for greater than 1200 seconds, or when half of the time has expired if the initial subscription was for 1200 seconds or less.

5.1.1.4 User-initiated re-registration

The UE can reregister a previously registered public user identity with its contact address at any time.

Unless either the user or the application within the UE has determined that a continued registration is not required the UE shall reregister the public user identity either 600 seconds before the expiration time if the initial registration was for greater than 1200 seconds, or when half of the time has expired if the initial registration was for 1200 seconds or less.

The UE shall protect the REGISTER request using a security association, see 3GPP TS 33.203 [19], established as a result of an earlier registration, if IK is available.

The UE shall extract or derive a public user identity, the private user identity, and the domain name to be used in the Request-URI in the registration, according to the procedures described in subclause 5.1.1.1A.

On sending a REGISTER request that does not contain a challenge response, the UE shall populate the header fields as follows:

- a) an Authorization header, with the username field set to the value of the private user identity;
- b) a From header set to the SIP URI that contains the public user identity to be registered;
- c) a To header set to the SIP URI that contains the public user identity to be registered;
- d) a Contact header set to include SIP URI(s) that contain(s) in the hostport parameter the IP address of the UE or FQDN and protected server port value bound to the security association;
- e) a Via header containing the IP address or FQDN of the UE in the sent-by field and the protected server port value bound to the security association;

NOTE 1: If the UE specifies its FQDN in the host parameter in the Contact header and in the sent-by field in the Via header, then it has to ensure that the given FQDN will resolve (e.g., by reverse DNS lookup) to the IP address that is bound to the security association.

NOTE 2: The UE associates two ports, a protected client port and a protected server port, with each pair of security associations. For details on the selection of the protected port value see 3GPP TS 33.203 [19].

- f) an Expires header, or an expires parameter within the Contact header, set to 600 000 seconds as the value desired for the duration of the registration;

NOTE 3: The registrar (S-CSCF) might decrease the duration of the registration in accordance with network policy. Registration attempts with a registration period of less than a predefined minimum value defined in the registrar will be rejected with a 423 (Interval Too Brief) response.

- g) a Request-URI set to the SIP URI of the domain name of the home network;
- h) a Security-Client header field, set to specify the security mechanism it supports, the IPsec layer algorithms it supports and the new parameter values needed for the setup of two new pairs of security associations. For further details see 3GPP TS 33.203 [19] and RFC 3329 [48];
- i) a Security-Verify header that contains the content of the Security-Server header received in the 401 (Unauthorized) response of the last successful authentication;
- j) the Supported header containing the option tag "path"; and
- k) the P-Access-Network-Info header set as specified for the access network technology (for GPRS see subclause B.3).

On receiving the 200 (OK) response to the REGISTER request, the UE shall:

- a) store the new expiration time of the registration for this public user identity found in the To header value;
- b) store the list of URIs contained in the P-Associated-URI header value. This list contains the URIs that are associated to the registered public user identity;
- c) store the list of Service-Route headers contained in the Service-Route header, in order to build a proper preloaded Route header value for new dialogs and standalone transactions; and
- d) set the security association lifetime to the longest of either the previously existing security association lifetime, or the lifetime of the just completed registration plus 30 seconds.

When a 401 (Unauthorized) response to a REGISTER is received the UE shall behave as described in subclause 5.1.1.5.1.

On receiving a 423 (Interval Too Brief) response to the REGISTER request, the UE shall:

- send another REGISTER request populating the Expires header or the expires parameter with an expiration timer of at least the value received in the Min-Expires header of the 423 (Interval Too Brief) response.

When the timer F expires at the UE, the UE shall:

- 1) stop processing of all ongoing dialogs and transactions and silently discard them locally; and
- 2) after releasing all IP-CAN bearers used for the transport of media according to the procedures in subclause 9.2.2, the UE may:
 - a) select a different P-CSCF address from the list of P-CSCF addresses discovered during the procedures described in subclause 9.2.1;
 - b) if no response has been received when attempting to contact all P-CSCFs known by the UE, the UE may get a new set of P-CSCF-addresses as described in subclause 9.2.1; and
 - c) perform the procedures for initial registration as described in subclause 5.1.1.2.

NOTE 4: It is an implementation option whether these actions are also triggered by other means than expiration of timer F, e.g. based on ICMP messages.

After a maximum of 5 consecutive initial registration attempts, the UE shall not automatically attempt any further initial registration for an implementation dependant time of at least 30 minutes.

5.1.1.5 Authentication

5.1.1.5.1 General

Authentication is achieved via the registration and re-registration procedures. When the network requires authentication or re-authentication of the UE, the UE will receive a 401 (Unauthorized) response to the REGISTER request.

On receiving a 401 (Unauthorized) response to the REGISTER request, the UE shall:

- 1) extract the RAND and AUTN parameters;
- 2) check the validity of a received authentication challenge, as described in 3GPP TS 33.203 [19] i.e. the locally calculated XMAC must match the MAC parameter derived from the AUTN part of the challenge; and the SQN parameter derived from the AUTN part of the challenge must be within the correct range; and
- 3) check the existence of the Security-Server header as described in RFC 3329 [48]. If the header is not present or it does not contain the parameters required for the setup of the set of security associations (see annex H of 3GPP TS 33.203 [19]), the UE shall abandon the authentication procedure and send a new REGISTER request with a new Call-ID.

In the case that the 401 (Unauthorized) response to the REGISTER request is deemed to be valid the UE shall:

- 1) calculate the RES parameter and derive the keys CK and IK from RAND as described in 3GPP TS 33.203 [19];
- 2) set up a temporary set of security associations based on the static list and parameters it received in the 401 (Unauthorized) response and its capabilities sent in the Security-Client header in the REGISTER request. The UE sets up the temporary set of security associations using the most preferred mechanism and algorithm returned by the P-CSCF and supported by the UE and using IK as the shared key. The UE shall use the parameters received in the Security-Server header to setup the temporary set of security associations. The UE shall set a temporary SIP level lifetime for the temporary set of security associations to the value of reg-await-auth timer; and
- 3) send another REGISTER request using the temporary set of security associations to protect the message. The header fields are populated as defined for the initial request, with the addition that the UE shall include an Authorization header containing the private user identity and the authentication challenge response calculated by the UE using RES and other parameters, as described in RFC 3310 [49]. The UE shall also insert the Security-Client header that is identical to the Security-Client header that was included in the previous REGISTER request (i.e. the REGISTER request that was challenged with the received 401 (Unauthorized) response). The UE shall also insert the Security-Verify header into the request, by mirroring in it the content of the Security-Server header received in the 401 (Unauthorized) response. The UE shall set the Call-ID of the integrity protected REGISTER request which carries the authentication challenge response to the same value as the Call-ID of the 401 (Unauthorized) response which carried the challenge.

On receiving the 200 (OK) response for the integrity protected REGISTER request, the UE shall:

- change the temporary set of security associations to a newly established set of security associations, i.e. set its SIP level lifetime to the longest of either the previously existing set of security associations SIP level lifetime, or the lifetime of the just completed registration plus 30 seconds; and
- use the newly established set of security associations for further messages sent towards the P-CSCF as appropriate.

NOTE 1: In this case, the UE will send requests towards the P-CSCF over the newly established set of security associations. Responses towards the P-CSCF that are sent via UDP will be sent over the newly established set of security associations. Responses towards the P-CSCF that are sent via TCP will be sent over the same set of security associations that the related request was received on.

When the first request or response protected with the newly established set of security associations is received from the P-CSCF, the UE shall delete the old set of security associations and related keys it may have with the P-CSCF after all SIP transactions that use the old set of security associations are completed.

Whenever the 200 (OK) response is not received before the temporary SIP level lifetime of the temporary set of security associations expires or a 403 (Forbidden) response is received, the UE shall consider the registration to have failed. The UE shall delete the temporary set of security associations it was trying to establish, and use the old set of security associations. The UE should send an unprotected REGISTER message according to the procedure specified in subclause 5.1.1.2 if the UE considers the old set of security associations to be no longer active at the P-CSCF.

In the case that the 401 (Unauthorized) response is deemed to be invalid then the UE shall behave as defined in subclause 5.1.1.5.3.

5.1.1.5.2 Network-initiated re-authentication

At any time, the UE can receive a NOTIFY request carrying information related to the reg event package (as described in subclause 5.1.1.3). If:

- the state attribute in any of the <registration> elements is set to "active";
- the value of the <uri> sub-element inside the <contact> sub-element is set to the Contact address that the UE registered; and
- the event attribute of that <contact> sub-element(s) is set to "shortened";

the UE shall:

- 1) use the expiry attribute within the <contact> sub-element that the UE registered to adjust the expiration time for that public user identity; and
- 2) start the re-authentication procedures at the appropriate time (as a result of the S-CSCF procedure described in subclause 5.4.1.6) by initiating a reregistration as described in subclause 5.1.1.4, if required.

NOTE: When authenticating a given private user identity, the S-CSCF will only shorten the expiry time within the <contact> sub-element that the UE registered using its private user identity. The <contact> elements for the same public user identity, if registered by another UE using different private user identities remain unchanged. The UE will not initiate a reregistration procedure, if none of its <contact> sub-elements was modified.

5.1.1.5.3 Abnormal cases

If, in a 401 (Unauthorized) response, either the MAC or SQN is incorrect the UE shall respond with a further REGISTER indicating to the S-CSCF that the challenge has been deemed invalid as follows:

- in the case where the UE deems the MAC parameter to be invalid the subsequent REGISTER request shall contain no authentication challenge response and no AUTS parameter;
- in the case where the UE deems the SQN to be out of range, the subsequent REGISTER request shall contain the AUTS parameter and not an authentication challenge response (see 3GPP TS 33.102 [18]).

Whenever the UE detects any of the above cases, the UE shall:

- send the REGISTER request using an existing set of security associations, if available (see 3GPP TS 33.203 [19]);
- populate a new Security-Client header within the REGISTER request, set to specify the security mechanism it supports, the IPsec layer algorithms it supports and the parameters needed for the new security association setup; and
- not create a temporary set of security associations.

A UE shall only respond to two consecutive invalid challenges. The UE may attempt to register with the network again after an implementation specific time.

5.1.1.5A Change of Ipv6 address due to privacy

Stateless address autoconfiguration as described in RFC 2462 [20E] defines how an IPv6 prefix and an interface identifier is used by the UE to construct a complete IPv6 address.

If the UE receives an IPv6 prefix, the UE may change the interface identity of the IPv6 address as described in RFC 3041 [25A] due to privacy but this will result in service discontinuity for IMS services.

NOTE: The procedure described below will terminate all established dialogs and transactions and temporarily disconnect the UE from the IM CN subsystem until the new registration is performed. Due to this, the UE is recommended to provide a limited use of the procedure to ensure a maximum degree of continuous service to the end user.

In order to change the IPv6 address due to privacy, the UE shall:

- 1) terminate all ongoing dialogs (e.g., sessions) and transactions (e.g., subscription to the reg event);
- 2) deregister all registered public user identities as described in subclause 5.1.1.4;
- 3) construct a new IPv6 address according to the procedures specified in RFC 3041 [25A];
- 4) register the public user identities that were deregistered in step 2 above, as follows:
 - a) by performing an initial registration as described in subclause 5.1.1.2; and
 - b) by performing a subscription to the reg event package as described in subclause 5.1.1.3; and
- 5) subscribe to other event packages it was subscribed to before the change of IPv6 address procedure started.

5.1.1.6 User-initiated deregistration

The UE can deregister a public user identity that it has previously registered with its contact address at any time.

The UE shall integrity protect the REGISTER request using a security association, see 3GPP TS 33.203 [19], established as a result of an earlier registration, if one is available.

The UE shall extract or derive a public user identity, the private user identity, and the domain name to be used in the Request-URI in the registration, according to the procedures described in subclause 5.1.1.1A.

Prior to sending a REGISTER request for deregistration, the UE shall release all dialogs related to the public user identity that is going to be deregistered or to one of the implicitly registered public user identities.

On sending a REGISTER request, the UE shall populate the header fields as follows:

- a) the Authorization header, with the username field, set to the value of the private user identity;
- b) the From header set to the SIP URI that contains the public user identity to be deregistered;
- c) the To header set to the SIP URI that contains the public user identity to be deregistered;
- d) the Contact header set to either the value of "*" or SIP URI(s) that contain(s) in the hostport parameter the IP address of the UE or FQDN and the protected server port value bound to the security association;

- e) a Via header containing the IP address or FQDN of the UE in the sent-by field and the protected server port value bound to the security association;

NOTE 1: If the UE specifies its FQDN in the host parameter in the Contact header and in the sent-by field in the Via header, then it has to ensure that the given FQDN will resolve (e.g., by reverse DNS lookup) to the IP address that is bound to the security association.

- f) the Expires header, or the expires parameter of the Contact header, set to the value of zero, appropriate to the deregistration requirements of the user;
- g) a Request-URI set to the SIP URI of the domain name of the home network; and
- h) a P-Access-Network-Info header set as specified for the access network technology (for GPRS see subclause B.3).

On receiving the 200 (OK) response to the REGISTER request, the UE shall remove all registration details relating to this public user identity.

If there are no more public user identities registered, the UE shall delete the security associations and related keys it may have towards the IM CN subsystem.

If all public user identities are deregistered and the security association is removed, then the UE shall consider subscription to the reg event package cancelled (i.e. as if the UE had sent a SUBSCRIBE request with an Expires header containing a value of zero).

NOTE: When the UE has received the 200 (OK) response for the REGISTER request of the only public user identity currently registered with its associated set of implicitly registered public user identities (i.e. no other is registered), the UE removes the security association established between the P-CSCF and the UE. Therefore further SIP signalling (e.g. the NOTIFY request containing the deregistration event) will not reach the UE.

5.1.1.7 Network-initiated deregistration

Upon receipt of a NOTIFY request on the dialog which was generated during subscription to the reg event package as described in subclause 5.1.1.3, including one or more <registration> element(s) which were registered by this UE with:

- the state attribute set to "terminated" and the event attribute set to "rejected" or "deactivated"; or
- the state attribute set to "active" and the state attribute within the <contact> element belonging to this UE set to "terminated", and associated event attribute element to "rejected" or "deactivated";

the UE shall remove all registration details relating to these public user identities. In case of a "deactivated" event attribute, the UE shall start the initial registration procedure as described in subclause 5.1.1.2. In case of a "rejected" event attribute, the UE shall release all dialogs related to those public user identities.

Upon receipt of a NOTIFY request, the UE shall delete the security associations towards the P-CSCF either:

- if all <registration> element(s) having their state attribute set to "terminated" (i.e. all public user identities are deregistered) and the Subscription-State header contains the value of "terminated"; or
- if each <registration> element that was registered by this UE has either the state attribute set to "terminated", or the state attribute set to "active" and the state attribute within the <contact> element belonging to this UE set to "terminated".

The UE shall delete these security associations towards the P-CSCF after the server transaction (as defined in RFC 3261 [26]) pertaining to the received NOTIFY request terminates.

NOTE 1: Deleting a security association is an internal procedure of the UE and does not involve any SIP procedures.

NOTE 2: If all the public user identities or contact addresses registered by this UE are deregistered and the security association is removed, then the UE considers the subscription to the reg event package terminated (i.e. as if the UE had sent a SUBSCRIBE request with an Expires header containing a value of zero, or a NOTIFY request was received with Subscription-State header containing the value of "terminated").

NOTE 3: When the P-CSCF has removed the security association established between the P-CSCF and the UE, further SIP signalling (e.g. the NOTIFY containing the deregistration event) will not reach the UE.

5.1.2 Subscription and notification

5.1.2.1 Notification about multiple registered public user identities

Upon receipt of a 2xx response to the SUBSCRIBE request the UE shall maintain the generated dialog (identified by the values of the Call-ID, To and From headers).

Upon receipt of a NOTIFY request on the dialog which was generated during subscription to the reg event package the UE shall perform the following actions:

- if a state attribute "active", i.e. registered is received for one or more public user identities, the UE shall store the indicated public user identities as registered;
- if a state attribute "terminated", i.e. deregistered is received for one or more public user identities, the UE shall store the indicated public user identities as deregistered.

NOTE: There may be public user identities which are automatically registered within the registrar (S-CSCF) of the user upon registration of one public user identity. Usually these automatically or implicitly registered public user identities belong to the same service profile of the user and they might not be available within the UE. The implicitly registered public user identities may also belong to different service profiles. The here-described procedures provide a different mechanism (to the 200 (OK) response to the REGISTER request) to inform the UE about these automatically registered public user identities.

5.1.2.2 General SUBSCRIBE requirements

If the UA receives a 503 (Service Unavailable) response to an initial SUBSCRIBE request containing a Retry-After header, then the UE shall not automatically reattempt the request until after the period indicated by the Retry-After header contents.

5.1.2A Generic procedures applicable to all methods excluding the REGISTER method

5.1.2A.1 Mobile-originating case

The procedures of this subclause are general to all requests and responses, except those for the REGISTER method.

When the UE sends any request, the UE shall:

- include the protected server port in the Via header entry relating to the UE; and
- include the protected server port in any Contact header that is otherwise included.

The UE shall discard any SIP response that is not integrity protected and is received from the P-CSCF outside of the registration and authentication procedures. The requirements on the UE within the registration and authentication procedures are defined in subclause 5.1.1.

In accordance with RFC 3325 [34] the UE may insert a P-Preferred-Identity header in any initial request for a dialog or request for a standalone transaction as a hint for creation of an asserted identity within the IM CN subsystem. The UE may include any of the following in the P-Preferred-Identity header:

- a public user identity which has been registered by the user;
- a public user identity returned in a registration-state event package of a NOTIFY request as a result of an implicit registration that was not subsequently deregistered or has expired; or
- any other public user identity which the user has assumed by mechanisms outside the scope of this specification to have a current registration.

NOTE 1: The temporary public user identity specified in subclause 5.1.1.1 is not a public user identity suitable for use in the P-Preferred-Identity header.

NOTE 2: Procedures in the network require international public telecommunication numbers when telephone numbers are used in P-Preferred-Identity header.

NOTE 3: A number of headers can reveal information about the identity of the user. Where privacy is required, implementers should also give consideration to other headers that can reveal identity information. RFC 3323 [33] subclause 4.1 gives considerations relating to a number of headers.

Where privacy is required, in any initial request for a dialog or request for a standalone transaction, the UE shall set the From header to "Anonymous".

NOTE 4: The contents of the From header should not be relied upon to be modified by the network based on any privacy specified by the user either within the UE indication of privacy or by network subscription or network policy. Therefore the user should include the value "Anonymous" whenever privacy is explicitly required. As the user may well have privacy requirements, terminal manufacturers should not automatically derive and include values in this header from the public user identity or other values stored in or derived from the UICC. Where the user has not expressed a preference in the configuration of the terminal implementation, the implementation should assume that privacy is required. Users that require to identify themselves, and are making calls to SIP destinations beyond the IM CN subsystem, where the destination does not implement RFC 3325 [34], will need to include a value in the From header other than Anonymous.

The UE can indicate privacy of the P-Asserted-Identity that will be generated by the P-CSCF in accordance with RFC 3323 [33], and the additional requirements contained within RFC 3325 [34].

The UE shall insert a P-Access-Network-Info header into any request for a dialog, any subsequent request (except ACK requests and CANCEL requests) or response (except CANCEL responses) within a dialog or any request for a standalone method. The UE shall populate the P-Access-Network-Info header with the current point of attachment to the IP-CAN as specified for the access network technology (for GPRS see subclause B.3).

NOTE 5: During the dialog, the points of attachment to the IP-CAN of the UE may change (e.g. UE connects to different cells). The UE will populate the P-Access-Network-Info header in any request or response within a dialog with the current point of attachment to the IP-CAN (e.g. the current cell information).

The UE shall build a proper preloaded Route header value for all new dialogs and standalone transactions. The UE shall build a list of Route header values made out of, in this order, the P-CSCF URI (containing the IP address or the FQDN learnt through the P-CSCF discovery procedures, and the protected server port learnt during the registration procedure), and the values received in the Service-Route header saved from the 200 (OK) response to the last registration or re-registration.

When a SIP transaction times out, i.e. timer B, timer F or timer H expires at the UE, the UE may behave as if timer F expired, as described in subclause 5.1.1.4.

NOTE 6: It is an implementation option whether these actions are also triggered by other means.

5.1.2A.2 Mobile-terminating case

The procedures of this subclause are general to all requests and responses, except those for the REGISTER method.

When the UE sends any response, the UE shall:

- include the protected server port in any Contact header that is otherwise included.

The UE shall discard any SIP request that is not integrity protected and is received from the P-CSCF outside of the registration and authentication procedures. The requirements on the UE within the registration and authentication procedures are defined in subclause 5.1.1.

The UE can indicate privacy of the P-Asserted-Identity that will be generated by the P-CSCF in accordance with RFC 3323 [33], and the additional requirements contained within RFC 3325 [34].

NOTE 1: In the mobile-terminating case, this version of the document makes no provision for the UE to provide an P-Preferred-Identity in the form of a hint.

NOTE 2: A number of headers can reveal information about the identity of the user. Where, privacy is required, implementers should also give consideration to other headers that can reveal identity information. RFC 3323 [33] subclause 4.1 gives considerations relating to a number of headers.

The UE shall insert a P-Access-Network-Info header into any response to a request for a dialog, any subsequent request (except CANCEL requests) or response (except CANCEL responses) within a dialog or any response to a standalone method. The UE shall populate the P-Access-Network-Info header with its current point of attachment to the IP-CAN as specified for the access network technology (for GPRS see subclause B.3).

5.1.3 Call initiation - mobile originating case

5.1.3.1 Initial INVITE request

5.1.3.1.1 General

Subclause 5.1.3.1 describe the procedures when the initial INVITE is sent by the originating UE. The default behaviour using the SIP precondition mechanism is described in subclause 5.1.3.1.2.1. Session without preconditions may be initiated:

- when the remote node does not support the precondition mechanism, as discovered in subclause 5.1.3.1.2.2; or
- when the specific service does not require the precondition mechanism, as described in subclause 5.1.3.1.3.

Editor's Note: The detailed criteria when to use the non-precondition procedures / resource reservation should be either derived from stage 2 or should be included as a reference to 3GPP TS 23.228.

The UE may indicate that proxies should not fork the INVITE request by including a "no-fork" directive within the Request-Disposition header in the initial INVITE request as described in RFC 3841 [56B].

NOTE 1: Table A.4 specifies that UE support of forking is required in accordance with RFC 3261 [26]. The UE can accept or reject any of the forked responses, for example, if the UE is capable of supporting a limited number of simultaneous transactions or early dialogs.

When a final answer is received for one of the early dialogues, the UE proceeds to set up the SIP session. The UE shall not progress any remaining early dialogues to established dialogs. Therefore, upon the reception of a subsequent final 200 (OK) response for an INVITE request (e.g., due to forking), the UE shall:

- 1) acknowledge the response with an ACK request; and
- 2) send a BYE request to this dialog in order to terminate it.

If the UA receives a 503 (Service Unavailable) response to an initial INVITE request containing a Retry-After header, then the UE shall not automatically reattempt the request until after the period indicated by the Retry-After header contents.

If the UE receives a 488 (Not Acceptable Here) response to an initial INVITE request, the UE should send a new INVITE request containing SDP according to the procedures defined in subclause 6.1.

NOTE 2: An example of where a new request would not be sent is where knowledge exists within the UE, or interaction occurs with the user, such that it is known that the resulting SDP would describe a session that did not meet the user requirements

5.1.3.1.2 "Integration of resource management" required by originating UE

5.1.3.1.2.1 Preconditions required by originating UE

Upon generating an initial INVITE request using preconditions, the UE shall:

- indicate the support for reliable provisional responses and specify it using the Supported header mechanism;
- indicate the requirement of precondition and specify it using the Require header mechanism.

When the initial INVITE has been created and forwarded the forthcoming procedures are identical to the procedures described in subclause 5.1.3.1.1.

If the UE receives a 420 (Bad Extension) response to an initial INVITE request with "precondition" option-tag in the Unsupported header field, the UE shall either:

- a) abort the session attempt and shall not resend this INVITE request without "precondition" option-tag in the Require header, or
- b) try to complete the session by relaxing the requirement on the usage of the "integration of resource management in SIP" extension as described in RFC 3312 [30] and proceed with the procedures described in subclause 5.1.3.2 and subclause 6.1.

5.1.3.1.2.2 Preconditions not supported by remote end

This procedure is initiated upon the reception of a 420 (Bad Extension) response to an initial INVITE request, the response containing the "precondition" option-tag in the Unsupported header field value.

The UE may create a new INVITE request addressed to the same destination as initial INVITE. When creating the new INVITE request, the UE shall:

- 1) populate the From, To, Call-ID headers and the Request-URI as per the initial INVITE request;
- 2) include the "precondition" option-tag in the Supported header;
- 3) set each of the media streams in inactive mode in SDP as described in subclause 6.1 in this specification; and
- 4) forward the INVITE request as per regular procedures.

Upon receiving a provisional response or final response containing the remote SDP, the UE shall:

- 1) acknowledge, if required, the SIP response as per regular SIP procedures defined in RFC 3261 [26] and RFC 3262 [27]; and
- 2) initiate the regular resource reservation mechanism, as described in subclause 9.2.5.

When the above INVITE transaction is successfully completed, and the local resource reservation procedure is complete, the UE shall create and forward a re-INVITE request including:

- 1) the From, To, Call-ID headers as per a re-INVITE request; and
- 2) SDP in which the media streams previously set in inactive mode are set to active (sendrecv, sendonly or recvonly) mode, according to the procedures described in subclause 6.1 in this specification.

5.1.3.1.3 "Integration of resource management" not required by originating UE

This procedure is initiated when the SIP precondition procedure is not required for a session by the origination UE.

Upon generating the initial INVITE the UE may indicate the support of preconditions by including the "precondition" option-tag in the Supported header.

When the initial INVITE has been created and forwarded the forthcoming procedures are identical to the procedures described in subclause 5.1.3.1.1.

5.1.4 Call initiation - mobile terminating case

5.1.4.1 Initial INVITE request

5.1.4.1.1 General

The handling of incoming initial INVITE requests at the terminating UE is mainly dependant on the following conditions:

- the specific service requirements for resource reservation; and

- the UEs configuration for the case when the specific service does not require resource reservation.

Editor's Note: The detailed criteria when to use the non-precondition procedures / resource reservation should be either derived from stage 2 or should be included as a reference to 3GPP TS 23.228.

If an initial INVITE request is received the terminating UE shall check whether integration of resource management is required either due to the requested service or due to local configuration. If resource management is required at the terminating UE and:

- a) the received INVITE request includes the "precondition" option-tag in the Require header, the terminating UE shall perform the actions as described in subclause 5.1.4.1.2.1;
- b) the received INVITE request does not include the "precondition" option-tag in the Require header and the terminating UE, based on local configuration, requires the usage of preconditions in this case, the terminating UE shall perform the actions as described in subclause 5.1.4.1.2.2; or
- c) the received INVITE request does not include the "precondition" option-tag in the Require header and the terminating UE, based on local configuration, does not require the usage of preconditions in this case, the terminating UE shall perform the actions as described in subclause 5.1.4.1.2.3.

If resource management is not required by the terminating UE and:

- a) the received INVITE request includes the "precondition" option-tag in the Require header, the terminating UE shall perform the actions as described in subclause 5.1.4.1.2.1; or
- b) the received INVITE request does not include the "precondition" option-tag in the Require header, the terminating UE shall perform the actions as described in subclause 5.1.4.1.3.

NOTE: Table A.4 specifies that UE support of forking is required in accordance with RFC 3261 [26].

Editor's Note: The above note needs further investigation.

5.1.4.1.2 "Integration of resource management" required by terminating UE

5.1.4.1.2.1 Preconditions used by originating UE

Upon generating the first response to the initial INVITE request that indicated the "precondition" option-tag in the Require header, the UE shall indicate the requirement for reliable provisional responses and specify it using the Require header mechanism. The UE shall send the 200 (OK) response to the initial INVITE request only after the local resource reservation has been completed and the call is accepted by the termination user.

5.1.4.1.2.2 Preconditions not used by originating UE but preconditions required by terminating UE

Upon receiving an initial INVITE request without the "precondition" option-tag in the Require header, and the preconditions extension as described in RFC 3312 [30] is required by the terminating UE, the terminating UE shall generate a 421 (Extension Required) response indicating the required extension in the Require header field value.

5.1.4.1.2.3 Preconditions not used by originating UE and preconditions not required by terminating UE

Upon receiving an initial INVITE request without containing the "precondition" option-tag in the Require header, if the terminating UE is configured to not use the preconditions extension as described in RFC 3312 [30], the UE shall:

- 1) send none or more provisional response(s) (eg. 183 Session Progress); and
- 2) send a 200 (OK) response, when the resources have been reserved and the call has been accepted by the terminating user.

5.1.4.1.3 "Integration of resource management" not required by terminating UE

Upon receiving an initial INVITE request without containing the "precondition" option-tag Require headers, and "integration of resource management" is not required by the terminating UE, the terminating UE shall:

- 1) send none or more provisional response(s) (eg. 183 Session Progress); and

- 2) send 200 (OK) response, when the call is accepted by the terminating user.

5.1.5 Call release

Void.

5.1.6 Emergency service

A UE shall not attempt to establish an emergency session via the IM CN Subsystem when the UE can detect that the number dialled is an emergency number. The UE shall use the CS domain as described in 3GPP TS 24.008 [8].

In the event the UE receives a 380 (Alternative Service) response to an INVITE request the response containing a XML body that includes an <alternative service> element with the <type> child element set to "emergency", the UE shall automatically:

- send an ACK request to the P-CSCF as per normal SIP procedures;
- attempt an emergency call setup according to the procedures described in 3GPP TS 24.008 [8].

The UE may also provide an indication to the user based on the text string contained in the <reason> element.

As a consequence of this, a UE operating in MS operation mode C cannot perform emergency calls.

5.1.7 Void

5.2 Procedures at the P-CSCF

5.2.1 General

The P-CSCF shall support the Path and Service-Route headers.

NOTE 1: The Path header is only applicable to the REGISTER request and its 200 (OK) response. The Service-Route header is only applicable to the 200 (OK) response of REGISTER request.

When the P-CSCF sends any request or response to the UE, before sending the message the P-CSCF shall:

- remove the P-Charging-Function-Addresses and P-Charging-Vector headers, if present.

When the P-CSCF receives any request or response from the UE, the P-CSCF shall:

- remove the P-Charging-Function-Addresses and P-Charging-Vector headers, if present. Also, the P-CSCF shall ignore any data received in the P-Charging-Function-Addresses and P-Charging-Vector headers; and
- may insert previously saved values into the P-Charging-Function-Addresses and P-Charging-Vector headers before forwarding the message.

NOTE 2: When the P-CSCF is located in the visited network, then it will not receive the P-Charging-Function-Addresses header from the S-CSCF or I-CSCF. Instead, the P-CSCF discovers charging function addresses by other means not specified in this document.

When the P-CSCF receives any request or response containing the P-Media-Authorization header from the S-CSCF, the P-CSCF shall remove the header.

NOTE 3: If service based local policy applies, the P-CSCF will insert the P-Media-Authorization header as described in subclauses 5.2.7.2 and 5.2.7.3.

NOTE 4: The P-CSCF will integrity protect all SIP messages sent to the UE outside of the registration and authentication procedures. The P-CSCF will discard any SIP message that is not integrity protected and is received outside of the registration and authentication procedures. The integrity protection and checking requirements on the P-CSCF within the registration and authentication procedures are defined in subclause 5.2.2.

5.2.2 Registration

When the P-CSCF receives a REGISTER request from the UE, the P-CSCF shall:

- 1) insert a Path header in the request including an entry containing:
 - the SIP URI identifying the P-CSCF;
 - an indication that requests routed in this direction of the path (i.e. from the S-CSCF to the P-CSCF) are expected to be treated as for the mobile-terminating case. This indication may e.g. be in a parameter in the URI, a character string in the user part of the URI, or be a port number in the URI;
- 2) insert a Require header containing the option tag "path";
- 3) insert a P-Charging-Vector header with the icid parameter populated as specified in 3GPP TS 32.260 [17];
- 4) insert the parameter "integrity-protected" (described in subclause 7.2A.2) with a value "yes" into the Authorization header field in case the REGISTER request was either received integrity protected with the security association created during an ongoing authentication procedure and includes an authentication challenge response (i.e. RES parameter), or it was received on the security association created during the last successful authentication procedure and with no authentication challenge response (i.e. no RES parameter), otherwise insert the parameter with the value "no";
- 5) in case the REGISTER request was received without integrity protection, then check the existence of the Security-Client header. If the header is present, then remove and store it. If the header is not present, then the P-CSCF shall return a suitable 4xx response;
- 6) in case the REGISTER request was received integrity protected, then the P-CSCF shall:
 - a) check the security association which protected the request. If the security association is a temporary one, then the request is expected to contain a Security-Verify header in addition to a Security-Client header. If there are no such headers, then the P-CSCF shall return a suitable 4xx response. If there are such headers, then the P-CSCF shall compare the content of the Security-Verify header with the content of the Security-Server header sent earlier and the content of the Security-Client header with the content of the Security-Client header received in the challenged REGISTER. If those do not match, then there is a potential man-in-the-middle attack. The request should be rejected by sending a suitable 4xx response. If the contents match, the P-CSCF shall remove the Security-Verify and the Security-Client header;
 - b) if the security association the REGISTER request was received on, is an already established one, then:
 - the P-CSCF shall remove the Security-Verify header if it is present;
 - a Security-Client header containing new parameter values is expected. If this header or any required parameter is missing, then the P-CSCF shall return a suitable 4xx response;
 - the P-CSCF shall remove and store the Security-Client header before forwarding the request to the S-CSCF; and
 - c) check if the private user identity conveyed in the Authorization header of the integrity-protected REGISTER request is the same as the private user identity which was previously challenged or authenticated. If the private user identities are different, the P-CSCF shall reject the REGISTER request by returning a 403 (Forbidden) response;
- 7) insert a P-Visited-Network-ID header field, with the value of a pre-provisioned string that identifies the visited network at the home network; and
- 8) determine the I-CSCF of the home network and forward the request to that I-CSCF.

When the P-CSCF receives a 401 (Unauthorized) response to a REGISTER request, the P-CSCF shall:

- 1) delete any temporary set of security associations established towards the UE;
- 2) remove the CK and IK values contained in the 401 (Unauthorized) response and bind them to the proper private user identity and to the temporary set of security associations which will be setup as a result of this challenge. The P-CSCF shall forward the 401 (Unauthorized) response to the UE if and only if the CK and IK have been removed;

- 3) insert a Security-Server header in the response, containing the P-CSCF static security list and the parameters needed for the security association setup, as specified in Annex H of 3GPP TS 33.203 [19]. The P-CSCF shall support the "ipsec-3gpp" security mechanism, as specified in RFC 3329 [48]. The P-CSCF shall support the HMAC-MD5-96 (RFC 2403 [20C]) and HMAC-SHA-1-96 (RFC 2404 [20D]) IPsec layer algorithms;
- 4) set up the temporary set of security associations with a temporary SIP level lifetime between the UE and the P-CSCF for the user identified with the private user identity. For further details see 3GPP TS 33.203 [19] and RFC 3329 [48]. The P-CSCF shall set the temporary SIP level lifetime for the temporary set of security associations to the value of reg-await-auth timer; and
- 5) send the 401 (Unauthorized) response to the UE using the security association with which the associated REGISTER request was protected, or unprotected in case the REGISTER request was received unprotected.

NOTE 1: The challenge in the 401 (Unauthorized) response sent back by the S-CSCF to the UE as a response to the REGISTER request is piggybacked by the P-CSCF to insert the Security-Server header field in it. The S-CSCF authenticates the UE, while the P-CSCF negotiates and sets up two pairs of security associations with the UE during the same registration procedure. For further details see 3GPP TS 33.203 [19].

When the P-CSCF receives a 200 (OK) response to a REGISTER request, the P-CSCF shall check the value of the Expires header field and/or Expires parameter in the Contact header. When the value of the Expires header field and/or expires parameter in the Contact header is different than zero, then the P-CSCF shall:

- 1) save the list of Service-Route headers preserving the order. The P-CSCF shall store this list during the entire registration period of the respective public user identity. The P-CSCF shall use this list to validate the routing information in the requests originated by the UE. If this registration is a reregistration, the P-CSCF shall replace the already existing list of Service-Route headers with the new list;
- 2) associate the Service-Route header list with the registered public user identity;
- 3) store the public user identities found in the P-Associated-URI header value, as those that are authorized to be used by the UE;
- 4) store the default public user identity for use with procedures for the P-Asserted-Identity header. The default public user identity is the first on the list of URIs present in the P-Associated-URI header;

NOTE 2: There may be more than one default public user identities stored in the P-CSCF, as the result of the multiple registrations of public user identities.

- 5) store the values received in the P-Charging-Function-Addresses header;
- 6) if a temporary set of security associations exists, change the temporary set of security associations to a newly established set of security associations, i.e. set its SIP level lifetime to the longest of either the previously existing set of security associations SIP level lifetime, or the lifetime of the just completed registration plus 30 seconds; and
- 7) protect the 200 (OK) response to the REGISTER request within the same security association to that in which the request was protected.

When receiving a SIP message (including REGISTER requests) from the UE over the newly established set of security associations that have not yet been taken into use, the P-CSCF shall:

- 1) reduce the SIP level lifetime of the old set of security associations towards the same UE to $64 * T1$ (if currently longer than $64 * T1$); and
- 2) use the newly established set of security associations for further messages sent towards the UE as appropriate (i.e. take the newly established set of security associations into use).

NOTE 3: In this case, the P-CSCF will send requests towards the UE over the newly established set of security associations. Responses towards the UE that are sent via UDP will be sent over the newly established set of security associations. Responses towards the UE that are sent via TCP will be sent over the same set of security associations that the related request was received on.

NOTE 4: When receiving a SIP message (including REGISTER requests) from the UE over a set of security associations that is different from the newly established set of security associations, the P-CSCF will not take any action on any set of security associations.

When the SIP level lifetime of an old set of security associations is about to expire, i.e. their SIP level lifetime is shorter than $64 \cdot T1$ and a newly established set of security associations has not been taken into use, the P-CSCF shall use the newly established set of security associations for further messages towards the UE as appropriate (see NOTE 3).

When sending the 200 (OK) response for a REGISTER request that concludes a re-authentication, the P-CSCF shall:

- 1) keep the set of security associations that was used for the REGISTER request that initiated the re-authentication;
- 2) keep the newly established set of security associations created during this authentication;
- 3) delete, if existing, any other set of security associations towards this UE immediately; and
- 4) go on using for further requests sent towards the UE the set of security associations that was used to protect the REGISTER request that initiated the re-authentication.

When sending the 200 (OK) response for a REGISTER request that concludes an initial authentication, i.e. the initial REGISTER request was received unprotected, the P-CSCF shall:

- 1) keep the newly established set of security associations created during this authentication;
- 2) delete, if existing, any other set of security associations towards this UE immediately; and
- 3) use the kept newly established set of security associations for further messages sent towards the UE.

NOTE 5: The P-CSCF will maintain two Route header lists. The first Route header list - created during the registration procedure - is used only to validate the routing information in the initial requests that originate from the UE. This list is valid during the entire registration of the respective public user identity. The second Route list - constructed from the Record Route headers in the initial INVITE and associated response - is used during the duration of the call. Once the call is terminated, the second Route list is discarded.

The P-CSCF shall delete any security association from the IPsec database when their SIP level lifetime expires.

The handling of the security associations at the P-CSCF is summarized in table 5.2.2-1.

Table 5.2.2-1: Handling of security associations at the P-CSCF

	Temporary set of security associations	Newly established set of security associations	Old set of security associations
SIP message received over newly established set of security associations that have not yet been taken into use	No action	Take into use	Reduce SIP level lifetime to $64 \cdot T1$, if lifetime is larger than $64 \cdot T1$
SIP message received over old set of security associations	No action	No action	No action
Old set of security associations currently in use will expire in $64 \cdot T1$	No action	Take into use	No action
Sending an authorization challenge within a 401 (Unauthorized) response for a REGISTER request	Create Remove any previously existing temporary set of security associations	No action	No action
Sending 200 (OK) response for REGISTER request that concludes re-authentication	Change to a newly established set of security associations	Convert to and treat as old set of security associations (see next column)	Continue using the old set of security associations over which the REGISTER request, that initiated the re-authentication was received. Delete all other old sets of security associations immediately
Sending 200 (OK) response for REGISTER request that concludes initial authentication	Change to a newly established set of security associations and take into use immediately	Convert to old set of security associations, i.e. delete	Delete

5.2.3 Subscription to the user's registration-state event package

Upon receipt of a 200 (OK) response to the initial REGISTER request of an user, the P-CSCF shall subscribe to the reg event package at the users registrar (S-CSCF) as described in RFC 3680 [43]. The P-CSCF shall:

- 1) generate a SUBSCRIBE request with the following elements:
 - a Request-URI set to the resource to which the P-CSCF wants to be subscribed to, i.e. to a SIP URI that contains the default public user identity of the user;
 - a From header set to the P-CSCF's SIP URI;
 - a To header, set to a SIP URI that contains the default public user identity of the user;
 - an Event header set to the "reg" event package;
 - an Expires header set to a value higher then the Expires header indicated in the 200 (OK) response to the REGISTER request;
 - a P-Asserted-Identity header set to the SIP URI of the P-CSCF, which was inserted into the Path header during the registration of the user to whose registration state the P-CSCF subscribes to; and
 - a P-Charging-Vector header with the icid parameter populated as specified in 3GPP TS 32.260 [17]; and
- 2) determine the I-CSCF of the home network (e.g., by using DNS services);

before sending the SUBSCRIBE request to that I-CSCF, according to the procedures of RFC 3261 [26].

Upon receipt of a 2xx response to the SUBSCRIBE request, the P-CSCF shall store the information for the so established dialog and the expiration time as indicated in the Expires header of the received response.

If continued subscription is required the P-CSCF shall automatically refresh the subscription by the reg event package 600 seconds before the expiration time for a previously registered public user identity, either 600 seconds before the expiration time if the initial subscription was for greater than 1200 seconds, or when half of the time has expired if the initial subscription was for 1200 seconds or less.

5.2.4 Registration of multiple public user identities

Upon receipt of a 2xx response to the SUBSCRIBE request the P-CSCF shall maintain the generated dialog (identified by the values of the Call-ID, To and From headers).

Upon receipt of a NOTIFY request on the dialog which was generated during subscription to the reg event package of the user, the P-CSCF shall perform the following actions:

- 1) for each public user identity whose state attribute in the <registration> element is set to "active", i.e. registered; and
 - the state attribute within the <contact> sub-element is set to "active"; and
 - the value of the <uri> sub-element inside the <contact> sub-element is set to the contact address of the user's UE; and
 - the event attribute of that <contact> sub-element(s) is set to "registered" or "created";

the P-CSCF shall bind the indicated public user identity as registered to the contact information of the respective user;

- 2) for each public user identity whose state attribute in the <registration> element is set to "active", i.e. registered; and
 - the state attribute within the <contact> sub-element is set to "terminated";
 - the value of the <uri> sub-element inside the <contact> sub-element is set to the contact address of the user's UE; and

- the event attribute of that <contact> sub-element(s) is set to "deactivated", "expired", "probation", "unregistered", or "rejected";

the P-CSCF shall consider the indicated public user identity as deregistered for this user, and shall release all stored information for the public user identity bound to the respective user; and

- 3) for each public user identity whose state attribute in the <registration> element is set to "terminated", i.e. deregistered; and

- the value of the <uri> sub-element inside the <contact> sub-element is set to the contact address of the user's UE; and

- the event attribute of that <contact> sub-element(s) is set to "deactivated", "expired", "probation", "unregistered", or "rejected";

the P-CSCF shall consider the indicated public user identity as deregistered for this UE, and shall release all stored information for these public user identity bound to the respective user.

If all public user identities, that were registered by the user using its private user identity, have been deregistered, the P-CSCF may either unsubscribe to the reg event package of the user or let the subscription expire.

NOTE: There may be public user identities which are implicitly registered within the registrar (S-CSCF) of the user upon registration of one public user identity. The procedures in this subclause provide a mechanism to inform the P-CSCF about these implicitly registered public user identities.

5.2.5 Deregistration

5.2.5.1 User-initiated deregistration

When the P-CSCF receives a 200 (OK) response to a REGISTER request (sent according to subclause 5.2.2) sent by this UE, it shall check the value of the Expires header field and/or expires parameter in the Contact header field. When the value of the Expires header field or expires parameter equals zero, then the P-CSCF shall:

- 1) remove the public user identity found in the To header field, and all the associated public user identities, from the registered public user identities list belonging to this UE and all related stored information; and
- 2) check if the UE has left any other registered public user identity. When all of the public user identities that were registered by this UE are deregistered, the P-CSCF shall delete the security associations towards the UE, after the server transaction (as defined in RFC 3261 [26]) pertaining to this deregistration terminates.

NOTE 1: Upon receipt of a NOTIFY request with all <registration> element(s) having their state attribute set to "terminated" (i.e. all public user identities are deregistered) and the Subscription-State header set to "terminated", the P-CSCF considers the subscription to the reg event package terminated (i.e. as if the P-CSCF had sent a SUBSCRIBE request with an Expires header containing a value of zero).

NOTE 2: There is no requirement to distinguish a REGISTER request relating to a registration from that relating to a deregistration. For administration reasons the P-CSCF may distinguish such requests, however this has no impact on the SIP procedures.

NOTE 3: When the P-CSCF has sent the 200 (OK) response for the REGISTER request of the only public user identity currently registered with its associated set of implicitly registered public user identities (i.e. no other is registered), the P-CSCF removes the security association established between the P-CSCF and the UE. Therefore further SIP signalling (e.g. the NOTIFY request containing the deregistration event) will not reach the UE.

5.2.5.2 Network-initiated deregistration

Upon receipt of a NOTIFY request on the dialog which was generated during subscription to the reg event package of the UE, as described in subclause 5.2.3, including one or more <registration> element(s) which were registered by the UE with either:

- the state attribute set to "terminated"; or

- the state attribute set to "active" and the state attribute within the <contact> sub-element belonging to this UE set to "terminated", and associated event attribute element to "rejected" or "deactivated";

the P-CSCF shall remove all stored information for these public user identities for this UE.

Upon receipt of a NOTIFY request with all <registration> element(s) having their state attribute set to "terminated" (i.e. all public user identities are deregistered) and the Subscription-State header set to "terminated" or when all public user identities of the UE have been deregistered, the P-CSCF shall shorten the security associations towards the UE.

NOTE 1: The security association between the P-CSCF and the UE is shortened to a value that will allow the NOTIFY request containing the deregistration event to reach the UE.

NOTE 2: When the P-CSCF receives the NOTIFY request with Subscription-State header containing the value of "terminated", the P-CSCF considers the subscription to the reg event package terminated (i.e. as if the P-CSCF had sent a SUBSCRIBE request to the S-CSCF with an Expires header containing a value of zero).

5.2.6 General treatment for all dialogs and standalone transactions excluding the REGISTER method

5.2.6.1 Introduction

The procedures of subclause 5.2.6 and its subclauses are general to all requests and responses, except those for the REGISTER method.

5.2.6.2 Determination of mobile-originated or mobile-terminated case

Upon receipt of an initial request or a target refresh request or a stand-alone transaction, the P-CSCF shall:

- perform the procedures for the mobile-terminating case as described in subclause 5.2.6.4 if the request makes use of the information for mobile-terminating calls, which was added to the Path header entry of the P-CSCF during registration (see subclause 5.2.2), e.g. the message is received at a certain port or the topmost Route header contains a specific user part or parameter;
- perform the procedures for the mobile-originating case as described in subclause 5.2.6.3 if this information is not used by the request.

5.2.6.3 Requests initiated by the UE

When the P-CSCF receives an initial request for a dialog or a request for a standalone transaction, and the request contains a P-Preferred-Identity header that matches one of the registered public user identities, the P-CSCF shall identify the initiator of the request by that public user identity.

When the P-CSCF receives an initial request for a dialog or a request for a standalone transaction, and the request contains a P-Preferred-Identity header that does not match one of the registered public user identities, or does not contain a P-Preferred-Identity header, the P-CSCF shall identify the initiator of the request by a default public user identity. If there is more than one default public user identity available, the P-CSCF shall randomly select one of them.

NOTE 1: The contents of the From header do not form any part of this decision process.

When the P-CSCF receives from the UE an initial request for a dialog, and a Service-Route header list exists for the initiator of the request, the P-CSCF shall:

- 1) verify that the list of URIs received in the Service-Route header (during the last successful registration or re-registration) matches the preloaded Route headers in the received request. This verification is done on a per URI basis, not as a whole string. If the verification fails, then the P-CSCF shall either:
 - a) return a 400 (Bad Request) response that may include a Warning header containing the warn-code 399; the P-CSCF shall not forward the request, and shall not continue with the execution of steps 2 onwards; or
 - b) replace the preloaded Route header value in the request with the value of the Service-Route header received during the last 200 (OK) response for a registration or re-registration;

- 2) add its own address to the Via header. The P-CSCF Via header entry is built in a format that contains the port number of the P-CSCF in accordance with the procedures of RFC3261 [26], and either:
 - a) the P-CSCF FQDN that resolves to the IP address, or
 - b) the P-CSCF IP address;
- 3) add its own SIP URI to the top of the Record-Route header. The P-CSCF SIP URI is built in a format that contains the port number of the P-CSCF where it awaits subsequent requests from the called party, and either:
 - a) the P-CSCF FQDN that resolves to the IP address; or
 - b) the P-CSCF IP address;
- 4) remove the P-Preferred-Identity header, if present, and insert a P-Asserted-Identity header with a value representing the initiator of the request;
- 5) add a P-Charging-Vector header with the icid parameter populated as specified in 3GPP TS 32.260 [17]; and
- 6) if the request is an INVITE request, save the Contact, CSeq and Record-Route header field values received in the request such that the P-CSCF is able to release the session if needed;

before forwarding the request, based on the topmost Route header, in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives a 1xx or 2xx response to the above request, the P-CSCF shall:

- 1) store the values received in the P-Charging-Function-Addresses header;
- 2) store the list of Record-Route headers from the received response;
- 3) store the dialog ID and associate it with the private user identity and public user identity involved in the session;
- 4) rewrite the port number of its own Record Route entry to its own protected server port number negotiated with the calling UE, and append the comp parameter in accordance with the procedures of RFC 3486 [55]; and

NOTE 2: The P-CSCF associates two ports, a protected client port and a protected server port, with each pair of security associations. For details on the selection of the protected port values see 3GPP TS 33.203 [19].

- 5) if the response corresponds to an INVITE request, save the Contact and Record-Route header field values received in the response such that the P-CSCF is able to release the session if needed;

before forwarding the response to the UE in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives from the UE a target refresh request for a dialog, the P-CSCF shall:

- 1) verify if the request relates to a dialog in which the originator of the request is involved:
 - a) if the request does not relate to an existing dialog in which the originator is involved, then the P-CSCF shall answer the request by sending a 403 (Forbidden) response back to the originator. The response may include a Warning header containing the warn-code 399. The P-CSCF will not forward the request. No other actions are required;
 - b) if the request relates to an existing dialog in which the originator is involved, then the P-CSCF shall continue with the following steps;
- 2) verify that the list of Route headers in the request matches the stored list of Record-Route headers for the same dialog. This verification is done on a per URI basis, not as a whole string. If the verification fails, then the P-CSCF shall either:
 - a) return a 400 (Bad Request) response that may include a Warning header containing the warn-code 399; the P-CSCF shall not forward the request, and shall not continue with the execution of steps 3 onwards; or
 - b) replace the Route header value in the request with the stored list of Record-Route headers for the same dialog;
- 3) add its own address to the Via header. The P-CSCF Via header entry is built in a format that contains the port number of the P-CSCF where it awaits the responses to come, and either:

- a) the P-CSCF FQDN that resolves to the IP address, or
 - b) the P-CSCF IP address;
- 4) add its own SIP URI to the top of Record-Route header. The P-CSCF SIP URI is built in a format that contains the port number of the P-CSCF where it awaits subsequent requests from the called party, and either:
- a) the P-CSCF FQDN that resolves to the IP address; or
 - b) the P-CSCF IP address; and
- 5) if the request is an INVITE request, save the Contact, Cseq and Record-Route header field values received in the request such that the P-CSCF is able to release the session if needed;

before forwarding the request, based on the topmost Route header, in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives a 1xx or 2xx response to the above request, the P-CSCF shall:

- 1) store the list of Record-Route headers from the received response;
- 2) rewrite the port number of its own Record Route entry to its own protected server port number negotiated with the calling UE, and append the comp parameter in accordance with the procedures of RFC 3486 [55]; and

NOTE 3: The P-CSCF associates two ports, a protected client port and a protected server port, with each pair of security associations. For details on the selection of the protected port value see 3GPP TS 33.203 [19].

- 3) if the response corresponds to an INVITE request, save the Contact and Record-Route header field values received in the response such that the P-CSCF is able to release the session if needed;

before forwarding the response to the UE in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives from the UE the request for a standalone transaction, and a Service-Route header list exists for the initiator of the request, the P-CSCF shall:

- 1) verify that the list of URIs received in the Service-Route header (during the last successful registration or re-registration) matches the preloaded Route headers in the received request. This verification is done on a per URI basis, not as a whole string. If the verification fails, then the P-CSCF shall either:
 - a) return a 400 (Bad Request) response that may include a Warning header containing the warn-code 399; the P-CSCF shall not forward the request, and shall not continue with the execution of steps 3 onwards; or
 - b) replace the preloaded Route header value in the request with the one received during the last registration in the Service-Route header of the 200 (OK) response;
- 2) remove the P-Preferred-Identity header, if present, and insert a P-Asserted-Identity header with a value representing the initiator of the request; and
- 3) add a P-Charging-Vector header with the icid parameter populated as specified in 3GPP TS 32.260 [17];

before forwarding the request, based on the topmost Route header, in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives any response to the above request, the P-CSCF shall:

- 1) store the values received in the P-Charging-Function-Addresses header;

before forwarding the response to the UE in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives from the UE subsequent requests other than a target refresh request (including requests relating to an existing dialog where the method is unknown), the P-CSCF shall:

- 1) verify if the request relates to a dialog in which the originator of the request is involved:
 - a) if the request does not relate to an existing dialog in which the originator is involved, then the P-CSCF shall answer the request by sending a 403 (Forbidden) response back to the originator. The response may include a Warning header containing the warn-code 399. The P-CSCF will not forward the request. No other actions are required;

- b) if the request relates to an existing dialog in which the originator is involved, then the P-CSCF shall continue with the following steps;
- 2) verify that the list of Route headers in the request matches the stored list of Record-Route headers for the same dialog. This verification is done on a per URI basis, not as a whole string. If the verification fails, then the P-CSCF shall either:
 - a) return a 400 (Bad Request) response that may include a Warning header containing the warn-code 399; the P-CSCF shall not forward the request, and shall not continue with the execution of steps 3 onwards; or
 - b) replace the Route header value in the request with the stored list of Record-Route headers for the same dialog; and
- 3) for dialogs that are not INVITE dialogs, add a P-Charging-Vector header with the icid parameter populated as specified in 3GPP TS 32.260 [17];

before forwarding the request, (based on the topmost Route header,) in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives from the UE the request for an unknown method (that does not relate to an existing dialog), and a Service-Route header list exists for the initiator of the request, the P-CSCF shall:

- 1) verify that the list of URIs received in the Service-Route header (during the last successful registration or re-registration) is included, preserving the same order, as a subset of the preloaded Route headers in the received request. This verification is done on a per URI basis, not as a whole string. If the verification fails, then the P-CSCF shall either:
 - a) return a 400 (Bad Request) response that may include a Warning header containing the warn-code 399; the P-CSCF shall not forward the request, and shall not continue with the execution of steps 2 onwards; or
 - b) replace the Route header value in the request with the one received during the last registration in the Service-Route header of the 200 (OK) response; and
- 2) remove the P-Preferred-Identity header, if present, and insert a P-Asserted-Identity header with a value representing the initiator of the request;

before forwarding the request, based on the topmost Route header, in accordance with the procedures of RFC 3261 [26].

5.2.6.4 Requests terminated by the UE

When the P-CSCF receives, destined for the UE, an initial request for a dialog, prior to forwarding the request, the P-CSCF shall:

- 1) remove its own SIP URI from the topmost Route header;
- 2) convert the list of Record-Route header values into a list of Route header values and save this list of Route headers;
- 3) if the request is an INVITE request, save a copy of the Contact, CSeq and Record-Route header field values received in the request such that the P-CSCF is able to release the session if needed;
- 4) add its own SIP URI to the top of the list of Record-Route headers and save the list. The P-CSCF SIP URI is built in a format that contains the comp parameter in accordance with the procedures of RFC 3486 [55], and the protected server port number of the security association established from the UE to the P-CSCF and either:
 - a) the P-CSCF FQDN that resolves to the IP address of the security association established from the UE to the P-CSCF; or
 - b) the P-CSCF IP address of the security association established from the UE to the P-CSCF;
- 5) add its own address to the top of the received list of Via header and save the list. The P-CSCF Via header entry is built in a format that contains the comp parameter in accordance with the procedures of RFC 3486 [55], and the protected server port number of the security association established from the UE to the P-CSCF and either:

- a) the P-CSCF FQDN that resolves to the IP address of the security association established from the UE to the P-CSCF; or
- b) the P-CSCF IP address of the security association established from the UE to the P-CSCF;

NOTE 1: The P-CSCF associates two ports, a protected client port and a protected server port, with each pair of security associations. For details of the usage of the two ports see 3GPP TS 33.203 [19].

- 6) store the values received in the P-Charging-Function-Addresses header;
- 7) remove and store the icid parameter received in the P-Charging-Vector header; and
- 8) save a copy of the P-Called-Party-ID header;

before forwarding the request to the UE in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives a 1xx or 2xx response to the above request, the P-CSCF shall:

- 1) remove the P-Preferred-Identity header, if present, and insert a P-Asserted-Identity header with the value saved from the P-Called-Party-ID header that was received in the request;
- 2) verify that the list of Via headers matches the saved list of Via headers received in the request corresponding to the same dialog, including the P-CSCF via header value. This verification is done on a per Via header value basis, not as a whole string. If the verification fails, then the P-CSCF shall either:
 - a) discard the response; or
 - b) replace the Via header values with those received in the request;
- 3) verify that the list of URIs received in the Record-Route header of the request corresponding to the same dialog is included, preserving the same order, as a subset of the Record-Route header list of this response. This verification is done on a per URI basis, not as a whole string. If the verification fails, then the P-CSCF shall either:
 - a) discard the response; or
 - b) replace the Record-Route header values with those received in the request, rewrite the port number of its own Record-Route entry to the port number where it awaits subsequent requests from the calling party and remove the comp parameter.

If the verification is successful, the P-CSCF shall rewrite the port number of its own Record-Route entry to the port number where it awaits subsequent requests from the calling party and remove the comp parameter;
- 4) store the dialog ID and associate it with the private user identity and public user identity involved in the session; and
- 5) if the response corresponds to an INVITE request, save the Contact and Record-Route header field value received in the response such that the P-CSCF is able to release the session if needed;

before forwarding the response in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives any other response to the above request, the P-CSCF shall:

- 1) verify that the list of Via headers matches the saved list of Via headers received in the request corresponding to the same dialog, including the P-CSCF via header value. This verification is done on a per Via header value basis, not as a whole string. If these lists do not match, then the P-CSCF shall either:
 - a) discard the response; or
 - b) replace the Via header values with those received in the request;

before forwarding the response in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives, destined for the UE, a target refresh request for a dialog, prior to forwarding the request, the P-CSCF shall:

- 1) remove its own SIP URI from the topmost Route header value;

- 2) add its own address to the top of the received list of Via header and save the list. The P-CSCF Via header entry is built in a format that contains the comp parameter in accordance with the procedures of RFC 3486 [55], and the protected server port number of the security association established from the UE to the P-CSCF and either:
 - a) the P-CSCF FQDN that resolves to the IP address of the security association established from the UE to the P-CSCF; or
 - b) the P-CSCF IP address of the security association established from the UE to the P-CSCF; and

NOTE 2: The P-CSCF associates two ports, a protected client port and a protected server port, with each pair of security associations. For details of the usage of the two ports see 3GPP TS 33.203 [19].

- 3) if the request is an INVITE request, save the Contact, Cseq and Record-Route header field values received in the request such that the P-CSCF is able to release the session if needed;

before forwarding the request to the UE in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives any response to the above request, the P-CSCF shall:

- 1) verify that the list of Via headers matches the saved list of Via headers received in the request corresponding to the same dialog, including the P-CSCF via header value. This verification is done on a per Via header value basis, not as a whole string. If the verification fails, then the P-CSCF shall either:
 - a) discard the response; or
 - b) replace the Via header values with those received in the request;
- 2) rewrite the port number of its own Record-Route entry to the port number where it awaits subsequent requests from the calling party and remove the comp parameter; and
- 3) if the response corresponds to an INVITE request, save the Contact and Record-Route header field values received in the response such that the P-CSCF is able to release the session if needed;

before forwarding the response in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives, destined for the UE, a request for a standalone transaction, or a request for an unknown method (that does not relate to an existing dialog), prior to forwarding the request, the P-CSCF shall:

- 1) add its own address to the top of the received list of Via header and save the list. The P-CSCF Via header entry is built in a format that contains the comp parameter in accordance with the procedures of RFC 3486 [55], and the protected server port number of the security association established from the UE to the P-CSCF and either:
 - a) the P-CSCF FQDN that resolves to the IP address of the security association established from the UE to the P-CSCF; or
 - b) the P-CSCF IP address of the security association established from the UE to the P-CSCF;

NOTE 3: The P-CSCF associates two ports, a protected client port and a protected server port, with each pair of security associations. For details of the usage of the two ports see 3GPP TS 33.203 [19].

- 2) store the values received in the P-Charging-Function-Addresses header;
- 3) remove and store the icid parameter received in the P-Charging-Vector header;and
- 4) save a copy of the P-Called-Party-ID header;

before forwarding the request to the UE in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives any response to the above request, the P-CSCF shall:

- 1) verify that the list of Via headers matches the saved list of Via headers received in the request corresponding to the same dialog, including the P-CSCF via header value. This verification is done on a per Via header value basis, not as a whole string. If these lists do not match, then the P-CSCF shall either:
 - a) discard the response; or
 - b) replace the Via header values with those received in the request; and

- 2) remove the P-Preferred-Identity header, if present, and insert an P-Asserted-Identity header with the value saved from the P-Called-Party-ID header of the request;

before forwarding the response in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives, destined for the UE, a subsequent request for a dialog that is not a target refresh request (including requests relating to an existing dialog where the method is unknown), prior to forwarding the request, the P-CSCF shall:

- 1) add its own address to the top of the received list of Via header and save the list. The P-CSCF Via header entry is built in a format that contains the comp parameter in accordance with the procedures of RFC 3486 [55], and the protected server port number of the security association established from the UE to the P-CSCF and either:
 - a) the P-CSCF FQDN that resolves to the IP address of the security association established from the UE to the P-CSCF; or
 - b) the P-CSCF IP address of the security association established from the UE to the P-CSCF; and

NOTE 4: The P-CSCF associates two ports, a protected client port and a protected server port, with each pair of security associations. For details of the usage of the two ports see 3GPP TS 33.203 [19].

- 2) remove and store the icid parameter from P-Charging-Vector header;

before forwarding the request to the UE in accordance with the procedures of RFC 3261 [26].

When the P-CSCF receives any response to the above request, the P-CSCF shall:

- 1) verify that the list of Via headers matches the saved list of Via headers received in the request corresponding to the same dialog, including the P-CSCF via header value. This verification is done on a per Via header value basis, not as a whole string. If these lists do not match, then the P-CSCF shall either:
 - a) discard the response; or
 - b) replace the Via header values with those received in the request;

before forwarding the response in accordance with the procedures of RFC 3261 [26].

5.2.7 Initial INVITE

5.2.7.1 Introduction

In addition to following the procedures for initial requests defined in subclause 5.2.6, initial INVITE requests also follow the procedures of this subclause.

5.2.7.2 Mobile-originating case

When the P-CSCF receives from the UE an INVITE request, the P-CSCF may require the periodic refreshment of the session to avoid hung states in the P-CSCF. If the P-CSCF requires the session to be refreshed, it shall apply the procedures described in draft-ietf-sip-session-timer [58] clause 8.

NOTE 1: Requesting the session to be refreshed requires support by at least one of the UEs. This functionality cannot automatically be granted, i.e. at least one of the involved UEs needs to support it.

The P-CSCF shall respond to all INVITE requests with a 100 (Trying) provisional response.

Upon receiving a response as specified in RFC 3313 [31] to the initial INVITE request, the P-CSCF shall:

- if a media authorization token is generated by the PDF (i.e. when service-based local policy control is applied), insert the P-Media-Authorization header containing that media authorization token.

NOTE 2: Typically, the first 183 (Session Progress) response contains an SDP answer including one or more "m=" media descriptions, but it is also possible that the response does not contain an SDP answer or the SDP does not include at least an "m=" media description. However, the media authorization token is generated independently of the presence or absence of "m=" media descriptions and sent to the UE in the P-Media-Authorization header value. The same media authorization token is used until the session is terminated. For further details see 3GPP TS 29.207 [12].

The P-CSCF shall also include the access-network-charging-info parameter (if received via the PDF, over the Go and Gq interfaces) in the P-Charging-Vector header in the first request originated by the UE that traverses the P-CSCF, as soon as the charging information is available in the P-CSCF, e.g., after the local resource reservation is complete. Typically, this first request is an UPDATE request if the remote UA supports the "integration of resource management in SIP" extension or a re-INVITE request if the remote UA does not support the "integration of resource management in SIP" extension. See subclause 5.2.7.4 for further information on the access network charging information.

5.2.7.3 Mobile-terminating case

When the P-CSCF receives an INVITE request destined for the UE the P-CSCF may require the periodic refreshment of the session to avoid hung states in the P-CSCF. If the P-CSCF requires the session to be refreshed, it shall apply the procedures described in draft-ietf-sip-session-timer [58] clause 8.

NOTE 1: Requesting the session to be refreshed requires support by at least one of the UEs. This functionality cannot automatically be granted, i.e. at least one of the involved UEs needs to support it in order to make it work.

When the P-CSCF receives an initial INVITE request destined for the UE, it will contain the URI of the UE in the Request-URI, and a single preloaded Route header. The received initial INVITE request will also have a list of Record-Route headers. Prior to forwarding the initial INVITE to the URI found in the Request-URI, the P-CSCF shall:

- if a media authorization token is generated by the PDF as specified in RFC 3313 [31] (i.e. when service-based local policy control is applied), insert the P-Media-Authorization header containing that media authorization token.

NOTE 2: Typically, the initial INVITE request contains an SDP offer including one or more "m=" media descriptions, but it is also possible that the INVITE request does not contain an SDP offer or the SDP does not include at least an "m=" media description. However, the media authorization token is generated independently of the presence or absence of "m=" media descriptions and sent to the UE in the P-Media-Authorization header value. The same media authorization token is used until the session is terminated. For further details see 3GPP TS 29.207 [12].

In addition, the P-CSCF shall respond to all INVITE requests with a 100 (Trying) provisional response.

The P-CSCF shall also include the access-network-charging-info parameter (if received via the PDF, over the Go and Gq interfaces) in the P-Charging-Vector header in the first request or response originated by the UE that traverses the P-CSCF, as soon as the charging information is available in the P-CSCF e.g., after the local resource reservation is complete. Typically, this first response is a 180 (Ringing) or 200 (OK) response if the remote UA supports the "integration of resource management in SIP" extension, or a re-INVITE request if the remote UA does not support the "integration of resource management in SIP" extension. See subclause 5.2.7.4 for further information on the access network charging information.

5.2.7.4 Access network charging information

The P-CSCF shall include the access-network-charging-info parameter within the P-Charging-Vector header as described in subclause 7.2A.5.

5.2.8 Call release

5.2.8.1 P-CSCF-initiated call release

5.2.8.1.1 Cancellation of a session currently being established

Upon receipt of an indication that radio coverage is no longer available for a served user, for whom one or more ongoing multimedia sessions are currently being established, the P-CSCF shall cancel the related dialogs by sending out a CANCEL request according to the procedures described in RFC 3261 [26].

5.2.8.1.2 Release of an existing session

Upon receipt of an indication that the radio interface resources are no longer available for a served user, for whom one or more ongoing sessions exist, the P-CSCF shall release each of the related dialogs by applying the following steps:

- 1) if the P-CSCF serves the calling user of a session it shall generate a BYE request based on the information saved for the related dialog, including:
 - a Request-URI, set to the stored Contact header provided by the called user;
 - a To header, set to the To header value as received in the 200 (OK) response for the initial INVITE request;
 - a From header, set to the From header value as received in the initial INVITE request;
 - a Call-ID header, set to the Call-Id header value as received in the initial INVITE request;
 - a CSeq header, set to the CSeq value that was stored for the direction from the calling to the called user, incremented by one;
 - a Route header, set to the routing information towards the called user as stored for the dialog;
 - further headers, based on local policy or the requested session release reason.
- 2) If the P-CSCF serves the called user of a session it shall generate a BYE request based on the information saved for the related dialog, including:
 - a Request-URI, set to the stored Contact header provided by the calling user;
 - a To header, set to the From header value as received in the initial INVITE request;
 - a From header, set to the To header value as received in the 200 (OK) response for the initial INVITE request;
 - a Call-ID header, set to the Call-Id header value as received in the initial INVITE request;
 - a CSeq header, set to the CSeq value that was stored for the direction from the called to the calling user, incremented by one – if no CSeq value was stored for that session it shall generate and apply a random number within the valid range for CSeqs;
 - a Route header, set to the routing information towards the calling user as stored for the dialog;
 - further headers, based on local policy or the requested session release reason.
- 3) send the so generated BYE request towards the indicated user.
- 4) upon receipt of the 2xx responses for the BYE request, shall delete all information related to the dialog and the related multimedia session.

5.2.8.1.3 Abnormal cases

Upon receipt of a request on a dialog for which the P-CSCF initiated session release, the P-CSCF shall terminate this received request and answer it with a 481 (Call/Transaction Does Not Exist) response.

5.2.8.1.4 Release of the existing dialogs due to registration expiration and deletion of the security association

If there are still active dialogs associated with the user after the security associations were deleted, the P-CSCF shall discard all information pertaining to these dialogs without performing any further SIP transactions with the peer entities of the P-CSCF.

NOTE: At the same time, the P-CSCF will also indicate via the Go interface that all resources associated with these dialogs should be released.

5.2.8.2 Call release initiated by any other entity

When the P-CSCF receives a 2xx response for a BYE request matching an existing dialog, it shall delete all the stored information related to the dialog.

5.2.8.3 Session expiration

If the P-CSCF requested the session to be refreshed periodically, and the P-CSCF got the indication that the session will be refreshed, when the session timer expires, the P-CSCF shall delete all the stored information related to the dialog.

NOTE: The P-CSCF will also indicate to the IP-CAN, via the Gq interface, that the session has terminated.

5.2.9 Subsequent requests

5.2.9.1 Mobile-originating case

The P-CSCF shall respond to all reINVITE requests with a 100 (Trying) provisional response.

For a reINVITE request from the UE, when the P-CSCF sends the UPDATE request towards the S-CSCF, the P-CSCF shall include the updated access-network-charging-info parameter in the P-Charging-Vector header. See subclause 5.2.7.4 for further information on the access network charging information.

5.2.9.2 Mobile-terminating case

The P-CSCF shall respond to all reINVITE requests with a 100 (Trying) provisional response.

For a reINVITE request destined towards the UE, when the P-CSCF sends 200 (OK) response (to the INVITE request) towards the S-CSCF, the P-CSCF shall include the updated access-network-charging-info parameter in the P-Charging-Vector header. See subclause 5.2.7.4 for further information on the access network charging information.

5.2.10 Emergency service

The P-CSCF shall store a configurable list of local emergency numbers and emergency URIs, i.e. those used for emergency services by the operator to which the P-CSCF belongs to. In addition to that, the P-CSCF shall store a configurable list of roaming partners' emergency numbers and emergency URIs associated with MCC and MNC codes.

NOTE: Certain SIP URIs may be classified as emergency URIs in all networks.

The P-CSCF shall inspect the Request URI of all INVITE requests from the UE for known emergency numbers and emergency URIs from these configurable lists. If the P-CSCF detects that the Request-URI of the INVITE request matches one of the numbers in any of these lists, the P-CSCF shall not forward the INVITE request. The P-CSCF shall respond the INVITE request with a 380 (Alternative Service) response.

In order to determine whether the INVITE request is destined for an emergency centre in the roaming country (i.e. the list of roaming partners' are inspected), the P-CSCF shall compare the MCC and the MNC fields in the received in the P-Access-Network-Info header of the INVITE request against its own MCC and MNC codes.

The P-CSCF shall include in the 380 (Alternative Service) response a Content-Type header field with the value set to associated MIME type of the 3GPP IMS XML body as described in subclause 7.6.1.

The P-CSCF shall include in the 3GPP IMS XML body:

- a) an <alternative-service> element, set to the parameters of the alternative service;
- b) a <type> child element, set to "emergency" to indicate that it was an emergency call; and
- c) a <reason> child element, set to an operator configurable reason.

5.2.11 Void

5.3 Procedures at the I-CSCF

5.3.1 Registration procedure

5.3.1.1 General

During the registration procedure the I-CSCF shall behave as a stateful proxy.

5.3.1.2 Normal procedures

When I-CSCF receives a REGISTER request, the I-CSCF starts the user registration status query procedure to the HSS as specified in 3GPP TS 29.228 [14].

NOTE: Different UEs, each with its own private user identity, may register the same public user identity. Registrations for the same shared public user identity are directed to the same S-CSCF as described in 3GPP TS 29.228 [14].

Prior to performing the user registration query procedure to the HSS, the I-CSCF decides which HSS to query, possibly as a result of a query to the Subscription Locator Functional (SLF) entity as specified in 3GPP TS 29.228 [14].

If the user registration status query response from the HSS includes a valid SIP URI, the I-CSCF shall:

- 1) replace the Request-URI of the received REGISTER request with the SIP URI received from the HSS in the Server-Name AVP;
- 2) apply the procedures as described in subclause 5.3.3 if topology hiding is required; and
- 3) forward the REGISTER request to the indicated S-CSCF.

If the user registration status query response from the HSS includes a list of capabilities, the I-CSCF shall:

- 1) select a S-CSCF that fulfils the indicated mandatory capabilities – if more than one S-CSCFs fulfils the indicated mandatory capabilities the S-CSCF which fulfils most of the possibly additionally indicated optional capabilities;
- 2) replace the Request-URI of the received REGISTER request with the URI of the S-CSCF;
- 3) apply the procedures as described in subclause 5.3.3 if topology hiding is required; and
- 4) forward the REGISTER request to the selected S-CSCF.

When the I-CSCF receives a 2xx response to a REGISTER request, the I-CSCF shall proxy the 2xx response to the P-CSCF.

5.3.1.3 Abnormal cases

In the case of SLF query, if the SLF does not send HSS address to the I-CSCF, the I-CSCF shall send back a 403 (Forbidden) response to the UE. The response may include a Warning header containing the warn-code 399.

If the HSS sends a negative response to the user registration status query request, the I-CSCF shall send back a 403 (Forbidden) response. The response may include a Warning header containing the warn-code 399.

If the user registration status query procedure cannot be completed, e.g. due to time-out or incorrect information from the HSS, the I-CSCF shall send back a 480 (Temporarily Unavailable) response to the UE.

If a selected S-CSCF:

- does not respond to the REGISTER request and its retransmissions by the I-CSCF; or
- sends back a 3xx response or 480 (Temporarily Unavailable) response to a REGISTER request;

and:

- the REGISTER request did not include an "integrity-protected" parameter in the Authorization header; or
- did include an "integrity-protected" parameter with a value different from "yes" in the Authorization header;

the I-CSCF shall select a new S-CSCF as described in subclause 5.3.1.2, based on the capabilities indicated from the HSS. The newly selected S-CSCF shall not be one of any S-CSCFs selected previously during this same registration procedure.

If a selected S-CSCF does not respond to a REGISTER request and its retransmissions by the I-CSCF and the REGISTER request did include an Authorization header with the "integrity-protected" parameter set to "yes", the I-CSCF shall send back a 408 (Request Timeout) response or 504 (Server Time-Out) response to the user, in accordance with the procedures in RFC 3261 [26].

If the I-CSCF cannot select a S-CSCF which fulfils the mandatory capabilities indicated by the HSS, the I-CSCF shall send back a 600 (Busy Everywhere) response to the user.

5.3.2 Initial requests

5.3.2.1 Normal procedures

The I-CSCF may behave as a stateful proxy for initial requests.

The I-CSCF shall verify for all requests whether they arrived from a trusted domain or not. If the request arrived from a non trusted domain, then the I-CSCF shall:

- 1) respond with 403 (Forbidden) response if the request is a REGISTER request;
- 2) remove all P-Asserted-Identity headers, all P-Access-Network-Info headers, all P-Charging-Vector headers and all P-Charging-Function-Addresses headers the request may contain, if the request is other than REGISTER request; and
- 3) continue with the procedures below.

If the request arrived from a trusted domain, the I-CSCF shall perform the procedures below.

NOTE 1: The I-CSCF may find out whether the request arrived from a trusted domain or not, from the procedures described in 3GPP TS 33.210 [19A].

When the I-CSCF receives an initial request for a dialog or standalone transaction, that does not contain a Route header, the I-CSCF shall start the user location query procedure to the HSS as specified in 3GPP TS 29.228 [14] for the called user, indicated in the Request-URI. Prior to performing the user location query procedure to the HSS, the I-CSCF decides which HSS to query, possibly as a result of a query to the Subscription Locator Functional (SLF) entity as specified in 3GPP TS 29.228 [14].

When the I-CSCF receives an INVITE request, the I-CSCF may require the periodic refreshment of the session to avoid hung states in the I-CSCF. If the I-CSCF requires the session to be refreshed, it shall apply the procedures described in draft-ietf-sip-session-timer [58] clause 8.

NOTE 2: Requesting the session to be refreshed requires support by at least one of the UEs. This functionality cannot automatically be granted, i.e. at least one of the involved UEs needs to support it.

Upon successful user location query, when the response contains the URI of the assigned S-CSCF, the I-CSCF shall:

- 1) insert the URI received from the HSS as the topmost Route header;

- 2) store the value of the icid parameter received in the P-Charging-Vector header and retain the icid parameter in the P-Charging-Vector header. If no icid parameter was found, then create a new, globally unique value for the icid parameter and insert it into the P-Charging-Vector header;
- 3) apply the procedures as described in subclause 5.3.3 if topology hiding is required; and
- 4) forward the request based on the topmost Route header.

Upon successful user location query, when the response contains information about the required S-CSCF capabilities, the I-CSCF shall:

- 1) select a S-CSCF according to the method described in 3GPP TS 29.228 [14];
- 2) insert the URI of the selected S-CSCF as the topmost Route header field value;
- 3) execute the procedure described in step 2 and 3 in the above paragraph (upon successful user location query, when the response contains the URI of the assigned S-CSCF); and
- 4) forward the request to the selected S-CSCF.

Upon an unsuccessful user location query when the response from the HSS indicates that the user does not exist, the I-CSCF shall return an appropriate unsuccessful SIP response. This response may be a 404 (Not found) or 604 (Does not exist anywhere) in the case the user is not a user of the home network.

Upon an unsuccessful user location query when the response from the HSS indicates that the user is not registered and no services are provided for such a user, the I-CSCF shall return an appropriate unsuccessful SIP response. This response may be a 480 (Temporarily unavailable) if the user is recognized as a valid user, but is not registered at the moment and it does not have services for unregistered users.

When the I-CSCF receives an initial request for a dialog or standalone transaction, that contains a single Route header pointing to itself, the I-CSCF shall determine from the entry in the Route header whether it needs to do HSS query or hiding. In case HSS query is needed, then the I-CSCF shall perform the procedures described for the case when there is no Route header present. If the I-CSCF determines that hiding must be performed, then the THIG functionality in I-CSCF received an outgoing initial request for which topology hiding has to be applied, and the I-CSCF shall:

- 1) remove its own SIP URI from the topmost Route header;
- 2) perform the procedures described in subclause 5.3.3; and
- 3) route the request based on the Request-URI header field.

When the I-CSCF receives an initial request for a dialog or standalone transaction containing more than one Route header, the I-CSCF shall:

- 1) remove its own SIP URI from the topmost Route header;
- 2) apply the procedures as described in subclause 5.3.3; and
- 3) forward the request based on the topmost Route header.

NOTE 3: In accordance with SIP the I-CSCF can add its own routeable SIP URI to the top of the Record-Route header to any request, independently of whether it is an initial request, or whether topology hiding is performed. The P-CSCF will ignore any Record-Route header that is not in the initial request of a dialog.

When the I-CSCF receives a response to an initial request (e.g. 183 or 2xx), the I-CSCF shall store the values from the P-Charging-Function-Addresses header, if present. If the next hop is outside of the current network, then the I-CSCF shall remove the P-Charging-Function-Addresses header prior to forwarding the message.

5.3.2.2 Abnormal cases

In the case of SLF query, if the SLF does not send HSS address to the I-CSCF, the I-CSCF shall send back a 404 (Not Found) response to the UE.

If the HSS sends a negative response to the user location query, the I-CSCF shall send back a 404 (Not Found) response.

If the I-CSCF receives a CANCEL request and if the I-CSCF finds an internal state indicating a pending Cx transaction with the HSS, the I-CSCF:

- shall answer the CANCEL with a 200 OK;
- shall answer the original request with a 487 Request Terminated; and
- shall silently discard the later arriving (pending) Cx answer message from the HSS.

5.3.3 THIG functionality in the I-CSCF(THIG)

5.3.3.1 General

The following procedures shall only be applied if topology hiding is required by the network. The network requiring topology hiding is called the hiding network.

NOTE 1: Requests and responses are handled independently therefore no state information is needed for that purpose within an I-CSCF(THIG).

The I-CSCF(THIG) shall apply topology hiding to all headers which reveal topology information, such as Via, Route, Record-Route, Service-Route.

Upon receiving an incoming REGISTER request for which topology hiding has to be applied and which includes a Path header, the I-CSCF(THIG) shall add the routeable SIP URI of an I-CSCF(THIG) to the top of the Path header. The I-CSCF(THIG) may include in the inserted SIP URI an indicator that identifies the direction of subsequent requests received by the I-CSCF i.e., from the S-CSCF towards the P-CSCF, to identify the mobile-terminating case. The I-CSCF(THIG) may encode this indicator in different ways, such as, e.g., a unique parameter in the URI, a character string in the username part of the URI, or a dedicated port number in the URI.

NOTE 2: Any subsequent request that includes the direction indicator (in the Route header) or arrives at the dedicated port number, indicates that the request was sent by the S-CSCF towards the P-CSCF.

Upon receiving an incoming initial request for which topology hiding has to be applied and which includes a Record-Route header, the I-CSCF(THIG) shall add its own routeable SIP URI to the top of the Record-Route header.

Upon receiving an outgoing initial request for which topology hiding has to be applied and which includes P-Charging-Function-Addresses header, the I-CSCF(THIG) shall remove the P-Charging-Function-Addresses header prior to forwarding the message.

5.3.3.2 Encryption for topology hiding

Upon receiving an outgoing request/response from the hiding network the I-CSCF(THIG) shall perform the encryption for topology hiding purposes, i.e. the I-CSCF(THIG) shall:

- 1) use the whole header values which were added by one or more specific entity of the hiding network as input to encryption, besides the UE entry;
- 2) not change the order of the headers subject to encryption when performing encryption;
- 3) use for one encrypted string all received consecutive header entries subject to encryption, regardless if they appear in separate consecutive headers or if they are consecutive entries in a comma separated list in one header;
- 4) construct an NAI in the form of 'username@realm', where the username part is the encrypted string, and the realm is the name of the encrypting network.
- 5) append a "tokenized-by=" tag and set it to the value of the encrypting network's name, after the constructed NAI;
- 6) form one valid entry for the specific header out of the resulting NAI, e.g. prepend "SIP/2.0/UDP" for Via headers or "sip:" for Route and Record-Route headers.

NOTE 1: Even if consecutive entries of the same network in a specific header are encrypted, they will result in only one encrypted header entry. For example:


```
Via: SIP/2.0/UDP icscf1_s.home1.net;lr,
      SIP/2.0/UDP Token( SIP/2.0/UDP scscf1.home1.net;lr,
                        SIP/2.0/UDP pcscf1.home1.net;lr)@home1.net;
                        tokenized-by=home1.net,
      SIP/2.0/UDP [5555::aaa:bbb:ccc:ddd]
```

NOTE 2: If multiple entries of the same network are within the same type of headers, but they are not consecutive, then these entries will be tokenized to different strings. For example:

```
Route: sip:icscf1_s.home1.net;lr,
       sip:Token(sip:scscf1.home1.net;lr)@home1.net;tokenized-by=home1.net,
       sip:asl.foreign.net;lr,
       sip:Token(sip:scscf1.home1.net;lr,
                sip:pcscf1.home1.net;lr)@home1.net;tokenized-by=home1.net,
       sip:[5555::aaa:bbb:ccc:ddd]
```

5.3.3.3 Decryption for Topology Hiding

Upon receiving and incoming requests/response to the hiding network the I-CSCF(THIG) shall perform the decryption for topology hiding purposes, i.e. the I-CSCF shall:

- 1) identify NAIs encrypted by the network this I-CSCF belongs to within all headers of the incoming message;
- 2) use the user part of those NAIs that carry the identification of the hiding network within the value of the tokenized-by tag as input to decryption;
- 3) use as encrypted string the user part of the NAI which follows the sent-protocol (for Via Headers, e.g. "SIP/2.0/UDP") or the URI scheme (for Route and Record-Route Headers, e.g. "sip:");
- 4) replace all content of the received header which carries encrypted information with the entries resulting from decryption.

EXAMPLE: An encrypted entry to a Via header that looks like:

```
Via: SIP/2.0/UDP Token(SIP/2.0/UDP scscf1.home1.net;lr,
                     SIP/2.0/UDP pcscf1.home1.net;lr)@home1.net;tokenized-by=home1.net
```

will be replaced with the following entries:

```
Via: SIP/2.0/UDP scscf1.home1.net;lr, SIP/2.0/UDP pcscf1.home1.net;lr
```

NOTE: Motivations for these decryption procedures are e.g. to allow the correct routing of a response through the hiding network, to enable loop avoidance within the hiding network, or to allow the entities of the hiding network to change their entries within e.g. the Record-Route header.

5.3.4 Void

5.4 Procedures at the S-CSCF

5.4.1 Registration and authentication

5.4.1.1 Introduction

The S-CSCF shall act as the SIP registrar for all UAs of the IM CN subsystem with public user identities.

The S-CSCF shall support the use of the Path and Service-Route header. The S-CSCF must also support the Require and Supported headers. The Path header is only applicable to the REGISTER request and its 200 (OK) response. The Service-Route header is only applicable to the 200 (OK) response of REGISTER.

The network operator defines minimum and maximum times for each registration. These values are provided within the S-CSCF.

The procedures for notification concerning automatically registered public user identities of a user are described in subclause 5.4.2.1.2.

5.4.1.2 Initial registration and user-initiated reregistration

5.4.1.2.1 Unprotected REGISTER

NOTE 1: Any REGISTER request sent unprotected by the UE is considered to be an initial registration. A 200 (OK) final response to such a request will only be sent back after the S-CSCF receives a correct authentication challenge response in a REGISTER request that is sent integrity protected.

NOTE 2: A REGISTER with Expires header value equal to zero should always be received protected. However, it is possible that in error conditions a REGISTER with Expires header value equal to zero may be received unprotected. In that instance the procedures below will be applied.

Upon receipt of a REGISTER request without an "integrity-protected" parameter, or with the "integrity-protected" parameter in the Authorization header set to "no", for an already registered public user identity linked to the same private user identity but with a new contact information (e.g. a user roams to a different network without de-registering the previous one), the S-CSCF shall:

- 1) perform the procedure for 'receipt of a REGISTER request without an "integrity-protected" parameter, or with the "integrity-protected" parameter in the Authorization header set to "no", for the received public user identity; and
- 2) if the authentication has been successful and if the previous registration has not expired, the S-CSCF shall perform the network initiated deregistration procedure only for the previous contact information as described in subclause 5.4.1.5.

Upon receipt of a REGISTER request without an "integrity-protected" parameter, or with the "integrity-protected" parameter in the Authorization header set to "no", which is not for an already registered public user identity linked to the same private user identity, the S-CSCF shall:

- 1) identify the user by the public user identity as received in the To header and the private user identity as received in the username field in the Authorization header of the REGISTER request;
- 2) check if the P-Visited-Network header is included in the REGISTER request, and if it is included identify the visited network by the value of this header;
- 3) select an authentication vector for the user. If no authentication vector for this user is available, after the S-CSCF has performed the Cx Multimedia Authentication procedure with the HSS, as described in 3GPP TS 29.228 [14], the S-CSCF shall select an authentication vector as described in 3GPP TS 33.203 [19].

Prior to performing Cx Multimedia Authentication procedure with the HSS, the S-CSCF decides which HSS to query, possibly as a result of a query to the Subscription Locator Functional (SLF) entity as specified in 3GPP TS 29.228 [14];

NOTE 3: At this point the S-CSCF informs the HSS, that the user currently registering will be served by the S-CSCF by passing its SIP URI to the HSS. This will be indicated by the HSS for all further incoming initial requests for a dialog or standalone transactions destined for this user, in order to direct all these requests to this S-CSCF.

NOTE 4: When passing its SIP URI to the HSS, the S-CSCF may include in its SIP URI the transport protocol and the port number where it wants to be contacted.

- 4) store the icid parameter received in the P-Charging-Vector header;
- 5) challenge the user by generating a 401 (Unauthorized) response for the received REGISTER request, including a WWW-Authenticate header which transports:
 - the home network identification in the realm field;
 - the RAND and AUTN parameters and optional server specific data for the UE in the nonce field;
 - the security mechanism, which is AKAv1-MD5, in the algorithm field;
 - the IK (Integrity Key) parameter for the P-CSCF in the ik field (see subclause 7.2A.1); and
 - the CK (Cipher Key) parameter for the P-CSCF in the ck field (see subclause 7.2A.1);

- 6) store the RAND parameter used in the 401 (Unauthorized) response for future use in case of a resynchronisation. If a stored RAND already exists in the S-CSCF, the S-CSCF shall overwrite the stored RAND with the RAND used in the most recent 401 (Unauthorized) response;
- 7) send the so generated 401 (Unauthorized) response towards the UE; and,
- 8) start timer reg-await-auth which guards the receipt of the next REGISTER request.

If the received REGISTER request indicates that the challenge sent previously by the S-CSCF to the UE was deemed to be invalid by the UE, the S-CSCF shall stop the timer reg-await-auth and proceed as described in the subclause 5.4.1.2.3.

5.4.1.2.2 Protected REGISTER

Upon receipt of a REGISTER request with the "integrity-protected" parameter in the Authorization header set to "yes", the S-CSCF shall identify the user by the public user identity as received in the To header and the private user identity as received in the Authorization header of the REGISTER request, and:

In the case that there is no authentication currently ongoing for this user (i.e. no timer reg-await-auth is running):

- 1) check if the user needs to be reauthenticated.

The S-CSCF may require authentication of the user for any REGISTER request, and shall always require authentication for REGISTER requests received without the "integrity-protected" parameter in the Authorization header set to "yes".

If the user needs to be reauthenticated, the S-CSCF shall proceed with the procedures as described for the initial REGISTER in subclause 5.4.1.2.1, beginning with step 4). If the user does not need to be reauthenticated, the S-CSCF shall proceed with the following steps in this paragraph; and

- 2) check whether an Expires timer is included in the REGISTER request and its value. If the Expires header indicates a zero value, the S-CSCF shall perform the deregistration procedures as described in subclause 5.4.1.4. If the Expires header does not indicate zero, the S-CSCF shall check whether the public user identity received in the To header is already registered. If it is not registered, the S-CSCF shall proceed beginning with step 5 below. Otherwise, the S-CSCF shall proceed beginning with step 6 below.

In the case that a timer reg-await-auth is running for this user the S-CSCF shall:

- 1) check if the Call-ID of the request matches with the Call-ID of the 401 (Unauthorized) response which carried the last challenge. The S-CSCF shall only proceed further if the Call-IDs match.
- 2) stop timer reg-await-auth;
- 3) check whether an Authorization header is included, containing:
 - a) the private user identity of the user in the username field;
 - b) the algorithm which is AKAv1-MD5 in the algorithm field; and
 - c) the authentication challenge response needed for the authentication procedure in the response field.

The S-CSCF shall only proceed with the following steps in this paragraph if the authentication challenge response was included;

- 4) check whether the received authentication challenge response and the expected authentication challenge response (calculated by the S-CSCF using XRES and other parameters as described in RFC 3310 [49]) match. The XRES parameter was received from the HSS as part of the Authentication Vector. The S-CSCF shall only proceed with the following steps if the challenge response received from the UE and the expected response calculated by the S-CSCF match;
- 5) after performing the Cx Server Assignment procedure with the HSS, as described in 3GPP TS 29.228 [14], store the following information in the local data:
 - a) the list of public user identities associated to the user, including the own public user identity under registration and the implicitly registered due to the received REGISTER request. Each public user identity is identified as either barred or non-barred; and,

- b) all the service profile(s) corresponding to the public user identities being registered (explicitly or implicitly), including initial Filter Criteria (the initial Filter Criteria for the Registered and common parts is stored and the unregistered part is retained for possible use later - in the case of the S-CSCF is retained if the user becomes unregistered);

NOTE 1: There might be more than one set of initial Filter Criteria received because some implicitly registered public user identities that are part of the same user's subscription may belong to different service profiles.

- 6) bind to each non-barred registered public user identity all registered contact information including all header parameters contained in the Contact header and all associated URI parameters and store information for future use;

NOTE 2: There might be more than one contact information available for one public user identity.

NOTE 3: The barred public user identities are not bound to the contact information.

- 7) check whether a Path header was included in the REGISTER request and construct a list of preloaded Route headers from the list of entries in the Path header. The S-CSCF shall preserve the order of the preloaded Route headers and bind them to the contact information that was received in the REGISTER message;

NOTE 4: If this registration is a reregistration, then a list of pre-loaded Route headers will already exist. The new list replaces the old list.

- 8) determine the duration of the registration by checking the value of the Expires header in the received REGISTER request. The S-CSCF may reduce the duration of the registration due to local policy or send back a 423 (Interval Too Brief) response specifying the minimum allowed time for registration;

- 9) store the icid parameter received in the P-Charging-Vector header;

10) create a 200 (OK) response for the REGISTER request, including:

- a) the list of received Path headers;
- b) a P-Associated-URI header containing the list of public user identities that the user is authorized to use. The first URI in the list of public user identities supplied by the HSS to the S-CSCF will indicate the default public user identity to be used by the S-CSCF. The public user identity indicated as the default public user identity must be an already registered public user identity. The S-CSCF shall place the default public user identity as a first entry in the list of URIs present in the P-Associated-URI header. The default public user identity will be used by the P-CSCF in conjunction with the procedures for the P-Asserted-Identity header, as described in subclause 5.2.6.3. The S-CSCF shall not add a barred public user identity to the list of URIs in the P-Associated-URI header;
- c) a Service-Route header containing:
 - the SIP URI identifying the S-CSCF containing an indication that requests routed via the service route (i.e. from the P-CSCF to the S-CSCF) are treated as for the mobile-originating case. This indication may e.g. be in a URI parameter, a character string in the user part of the URI or be a port number in the URI; and,
 - if network topology hiding is required a SIP URI identifying an I-CSCF (THIG) as the topmost entry;
- d) a P-Charging-Function-Addresses header containing the values received from the HSS if the P-CSCF is in the same network as the S-CSCF. It can be determined if the P-CSCF is in the same network as the S-CSCF by the contents of the P-Visited-Network-ID header field included in the REGISTER request; and
- e) Contact header listing all contact addresses for this public user identity.

NOTE 5: There might be other contact addresses available, that other UEs have registered for the same public user identity.

11) send the so created 200 (OK) response to the UE;

12) send a third-party REGISTER request, as described in subclause 5.4.1.7, to each AS that matches the Filter Criteria from the HSS for the REGISTER event; and,

NOTE 6: If this registration is a reregistration, the Filter Criteria already exists in the local data.

13) handle the user as registered for the duration indicated in the Expires header.

5.4.1.2.3 Abnormal cases

In the case that the authentication challenge response from the UE does not match with the expected authentication challenge response and the request has the "integrity-protected" parameter in the Authorization header set to "yes", the S-CSCF shall:

- send a 403 (Forbidden) response to the UE. The S-CSCF shall consider this authentication attempt as failed. The S-CSCF shall not update the registration state of the subscriber.

NOTE 1: If the UE was registered before, it stays registered until the registration expiration time expires.

In the case that the REGISTER request, which was supposed to carry the response to the challenge, contains no authentication challenge response and no AUTS parameters indicating that the MAC parameter was invalid in the challenge, the S-CSCF shall:

- respond with a 403 (Forbidden) response to the UE. The S-CSCF shall not update the registration state of the subscriber.

NOTE 2: If the UE was registered before, it stays registered until the registration expiration time expires.

In the case that the REGISTER request from the UE containing an authentication challenge response indicates that the authentication challenge was invalid (contains the AUTS parameter indicating this), the S-CSCF will fetch new authentication vectors from the HSS. In order to indicate a resynchronisation, the S-CSCF shall include the AUTS received from the UE and the stored RAND, when fetching the new authentication vectors. On receipt of the new authentication vectors from the HSS, the S-CSCF shall either:

- send a 401 (Unauthorized) response to initiate a further authentication attempt, using these new vectors; or
- respond with a 403 (Forbidden) response if the authentication attempt is to be abandoned. The S-CSCF shall not update the registration state of the subscriber.

NOTE 3: If the UE was registered before, it stays registered until the registration expiration time expires.

NOTE 4: Since the UE responds only to two consecutive invalid challenges, the S-CSCF will send a 401 (Unauthorized) response that contains a new challenge only twice.

In the case that the expiration timer from the UE is too short to be accepted by the S-CSCF, the S-CSCF shall:

- reject the REGISTER request with a 423 (Interval Too Brief) response, containing a Min-Expires header with the minimum registration time the S-CSCF will accept.

On receiving a failure response to one of the third-party REGISTER requests, the S-CSCF may initiate network-initiated deregistration procedure based on the information in the Filter Criteria. If the Filter Criteria does not contain instruction to the S-CSCF regarding the failure of the contact to the AS, the S-CSCF shall not initiate network-initiated deregistration procedure.

In the case that the REGISTER request from the UE contains more than one SIP URIs as Contact header entries, the S-CSCF shall only store the entry with the highest "q" value and include it in the 200 (OK) response.

NOTE 5: If the timer reg-await-auth expires, the S-CSCF will consider the authentication to have failed. If the public user identity was already registered, the S-CSCF will leave it as registered described in 3GPP TS 33.203 [19].

5.4.1.3 Authentication and reauthentication

Authentication and reauthentication is performed by the registration procedures as described in subclause 5.4.1.2.

5.4.1.4 User-initiated deregistration

When S-CSCF receives a REGISTER request with the Expires header field containing the value zero, the S-CSCF shall:

- check whether the "integrity-protected" parameter in the Authorization header field set to "yes", indicating that the REGISTER request was received integrity protected. The S-CSCF shall only proceed with the following steps if the "integrity-protected" parameter is set to "yes";
- release each multimedia session which was initiated by this UE with the public user identity found in the P-Asserted-Identity header field or with one of the implicitly registered public user identities by applying the steps listed in subclause 5.4.5.1.2;
- if this public user identity was registered only by this UE, deregister the public user identity found in the To header field together with the implicitly registered public user identities. Otherwise, the S-CSCF will only remove the contact address that was registered by this UE;
- send a third-party REGISTER request, as described in subclause 5.4.1.7, to each AS that matches the Filter Criteria from the HSS for the REGISTER event; and
- if this is a deregistration request for the only public user identity currently registered with its associated set of implicitly registered public user identities (i.e. no other is registered) and there are still active multimedia sessions associated with this user, release each multimedia session belonging to the served user by applying the steps listed in subclause 5.4.5.1.2.

If all public user identities of the UE are deregistered, then the S-CSCF may consider the UE and P-CSCF subscriptions to the reg event package cancelled (i.e. as if the UE had sent a SUBSCRIBE request with an Expires header containing a value of zero).

If the Authorization header of the REGISTER request did not contain an "integrity-protected" parameter, or the "integrity-protected" parameter was set to the value "no", the S-CSCF shall apply the procedures described in subclause 5.4.1.2.1.

On completion of the above procedures in this subclause and of the Cx Server Assignment procedure with the HSS, as described in 3GPP TS 29.228 [14], for one or more public user identities, the S-CSCF shall update or remove those public user identities, their registration state and the associated service profiles from the local data (based on operators' policy the S-CSCF can request of the HSS to either be kept or cleared as the S-CSCF allocated to this subscriber).

5.4.1.5 Network-initiated deregistration

NOTE 1: A network-initiated deregistration event that occurs at the S-CSCF may be received from the HSS or may be an internal event in the S-CSCF.

Prior to initiating the network-initiated deregistration for the only currently registered public user identity and its associated set of implicitly registered public user identities that have been registered with the same contact (i.e. no other public user identity is registered with this contact) while there are still active multimedia sessions belonging to this contact, the S-CSCF shall release only the multimedia sessions belonging to this contact as described in subclause 5.4.5.1. The multimedia sessions for the same public user identity, if registered with another contact remain unchanged.

When a network-initiated deregistration event occurs for one or more public user identities that are bound to one or more contacts, the S-CSCF shall send a NOTIFY request to all subscribers that have subscribed to the respective reg event package. Prior to sending the NOTIFY request, the S-CSCF may release all sessions related to the contacts that will be deregistered. For each NOTIFY request, the S-CSCF shall:

- 1) set the Request-URI and Route header to the saved route information during subscription;
- 2) set the Event header to the "reg" value;
- 3) in the body of the NOTIFY request, include as many <registration> elements as many public user identities the S-CSCF is aware of the user owns;
- 4) set the aor attribute within each <registration> element to one public user identity:
 - a) set the <uri> sub-element inside the <contact> sub-element of each <registration> element to the contact address provided by the UE;
 - b) if the public user identity:
 - i) has been deregistered then:

- set the state attribute within the <registration> element to "terminated";
- set the state attribute within the <contact> element to "terminated"; and
- set the event attribute within the <contact> element to "deactivated" if the S-CSCF expects the UE to reregister or "rejected" if the S-CSCF does not expect the UE to reregister; or

ii) has been kept registered then:

I) set the state attribute within the <registration> element to "active";

II) set the state attribute within the <contact> element to:

- for the contact address to be removed set the state attribute within the <contact> element to "terminated", and event attribute element to "deactivated" if the S-CSCF expects the UE to reregister or "rejected" if the S-CSCF does not expect the UE to reregister; or
- for the contact address which remain unchanged, if any, leave the <contact> element unmodified; and

NOTE 2: There might be more than one contact information available for one public user identity. When deregistering this UE, the S-CSCF will only modify the <contact> elements that were originally registered by this UE using its private user identity. The <contact> elements of the same public user identity, if registered by another UE using different private user identities remain unchanged.

5) add a P-Charging-Vector header with the icid parameter populated as specified in 3GPP TS 32.260 [17].

The S-CSCF shall only include the non-barred public user identities in the NOTIFY request.

Also, the S-CSCF shall send a third-party REGISTER request, as described in subclause 5.4.1.7, to each AS that matches the Filter Criteria from the HSS for the REGISTER event.

In case of the deregistration of the old contact information when the UE is roaming, registration is done in a new network and the previous registration has not expired, on completion of the above procedures, the S-CSCF shall remove the registration information related to the old contact from the local data.

Otherwise, on completion of the above procedures for one or more public user identities linked to the same private user identity, the S-CSCF shall deregister those public user identities and the associated implicitly registered public user identities. On completion of the Cx Server Assignment procedure with the HSS, as described in 3GPP TS 29.228 [14], the S-CSCF shall update or remove those public user identities linked to the same private user identity, their registration state and the associated service profiles from the local data (based on operators' policy the S-CSCF can request of the HSS to either be kept or cleared as the S-CSCF allocated to this subscriber). On the completion of the Cx Registration-Termination procedure with the HSS, as described in 3GPP TS 29.228 [14], the S-CSCF shall remove those public user identities, their registration state and the associated service profiles from the local data.

5.4.1.6 Network-initiated reauthentication

The S-CSCF may request a subscriber to reauthenticate at any time, based on a number of possible operator settable triggers as described in subclause 5.4.1.2.

If the S-CSCF is informed that a private user identity needs to be re-authenticated, the S-CSCF shall generate a NOTIFY request on all dialogs which have been established due to subscription to the reg event package of that user. For each NOTIFY request the S-CSCF shall:

- 1) set the Request-URI and Route header to the saved route information during subscription;
- 2) set the Event header to the "reg" value;
- 3) in the body of the NOTIFY request, include as many <registration> elements as many public user identities the S-CSCF is aware of the user owns:
 - a) set the <uri> sub-element inside the <contact> sub-element of each <registration> element to the contact address provided by the UE;
 - b) set the aor attribute within each <registration> element to one public user identity;

- c) set the state attribute within each <registration> element to "active";
- d) set the state attribute within each <contact> element to "active";
- e) set the event attribute within each <contact> element that was registered by this UE to "shortened"; and
- f) set the expiry attribute within each <contact> element that was registered by this UE to an operator defined value; and

NOTE 1: There might be more than one contact information available for one public user identity. The S-CSCF will only modify the <contact> elements that were originally registered by this UE using its private user identity. The S-CSCF will not modify the <contact> elements for the same public user identity, if registered by another UE using different private user identity.

- 4) set a P-Charging-Vector header with the icid parameter populated as specified in 3GPP TS 32.260 [17].

Afterwards the S-CSCF shall wait for the user to reauthenticate (see subclause 5.4.1.2).

NOTE 2: Network initiated re-authentication may occur due to internal processing within the S-CSCF.

The S-CSCF shall only include the non-barred public user identities in the NOTIFY request.

When generating the NOTIFY request, the S-CSCF shall shorten the validity of all registration lifetimes associated with this private user identity to an operator defined value that will allow the user to be re-authenticated.

5.4.1.7 Notification of Application Servers about registration status

During registration, the S-CSCF shall include a P-Access-Network-Info header (as received in the REGISTER request from the UE) in the 3rd-party REGISTER sent towards the ASs, if the AS is part of the trust domain. If the AS is not part of the trust domain, the S-CSCF shall not include any P-Access-Network-Info header. The S-CSCF shall not include a P-Access-Network-Info header in any responses to the REGISTER request.

If the registration procedure described in subclauses 5.4.1.2, 5.4.1.4 or 5.4.1.5 (as appropriate) was successful, the S-CSCF shall send a third-party REGISTER request to each AS with the following information:

- a) the Request-URI, which shall contain the AS's SIP URI;
- b) the From header, which shall contain the S-CSCF's SIP URI;
- c) the To header, which shall contain either the public user identity as contained in the REGISTER request received from the UE or one of the implicitly registered public user identities, as configured by the operator;
- d) the Contact header, which shall contain the S-CSCF's SIP URI;
- e) for initial registration and user-initiated reregistration (subclause 5.4.1.2), the Expires header, which shall contain the same value that the S-CSCF returned in the 200 (OK) response for the REGISTER request received from the UE;
- f) for user-initiated deregistration (subclause 5.4.1.4) and network-initiated deregistration (subclause 5.4.1.5), the Expires header, which shall contain the value zero;
- g) for initial registration and user-initiated reregistration (subclause 5.4.1.2), a message body, if there is Filter Criteria indicating the need to include HSS provided data for the REGISTER event (e.g. HSS may provide AS specific data to be included in the third-party REGISTER). If there is a service information XML element provided in the HSS Filter Criteria for an AS (see 3GPP TS 29.228 [14]), then the S-CSCF shall include it in the message body of the REGISTER request within the <service-info> XML element as described in subclause 7.6. For the messages including the IM CN subsystem XML body, the S-CSCF shall set the value of the Content-Type header to include the MIME type specified in subclause 7.6;
- h) for initial registration and user-initiated reregistration, the P-Charging-Vector header, which shall contain the same icid parameter that the S-CSCF received in the original REGISTER request from the UE;
- i) for initial registration and user-initiated reregistration, a P-Charging-Function-Addresses header, which shall contain the values received from the HSS if the message is forwarded within the S-CSCF home network.

5.4.2 Subscription and notification

5.4.2.1 Subscriptions to S-CSCF events

5.4.2.1.1 Subscription to the event providing registration state

When an incoming SUBSCRIBE request addressed to S-CSCF arrives containing the Event header with the reg event package, the S-CSCF shall:

- 1) check if, based on the local policy, the request was generated by a subscriber who is authorised to subscribe to the registration state of this particular user. The authorized subscribers include:
 - all public user identities this particular user owns, that the S-CSCF is aware of, and which are not-barred;
 - all the entities identified by the Path header (i.e. the P-CSCF to which this user is attached to); and
 - all the ASs listed in the initial filter criteria and not belonging to third-party providers.

NOTE: The S-CSCF finds the identity for authentication of the subscription in the P-Asserted-Identity header received in the SUBSCRIBE request.

- 2) generate a 2xx response acknowledging the SUBSCRIBE request and indicating that the authorised subscription was successful as described in RFC 3680 [43]. The S-CSCF shall populate the header fields as follows:
 - an Expires header, set to either the same or a decreased value as the Expires header in SUBSCRIBE request; and
 - a Contact header, set to is an identifier generated within the S-CSCF that will help to correlate refreshes for the SUBSCRIBE.

Afterwards the S-CSCF shall perform the procedures for notification about registration state as described in subclause 5.4.2.1.2.

5.4.2.1.2 Notification about registration state

For each NOTIFY request on all dialogs which have been established due to subscription to the reg event package of that user, the S-CSCF shall:

- 1) set the Request-URI and Route header to the saved route information during subscription;
- 2) set the Event header to the "reg" value;
- 3) in the body of the NOTIFY request, include as many <registration> elements as many public user identities the S-CSCF is aware of the user owns;
- 4) set the aor attribute within each <registration> element to one public user identity:
 - a) set the <uri> sub-element inside each <contact> sub-element of the <registration> element to the contact address provided by the respective UE; and
 - b) if the public user identity:
 - I) has been deregistered (i.e. no active contact left) then:
 - set the state attribute within the <registration> element to "terminated";
 - set the state attribute within each <contact> element to "terminated"; and
 - set the event attribute within each <contact> element to "deactivated", "expired", "unregistered", "rejected" or "probation" according RFC 3680 [43]; or
 - II) has been registered then:
 - set the <unknown-param> element to any additional header parameters contained in the contact header of the REGISTER request according to RFC 3680 [43];

- set the state attribute within the <registration> element to "active", if not already set to "active", otherwise leave it unchanged; and either:
- for the contact address to be registered: set the state attribute within the <contact> element to "active"; and set the event attribute within the <contact> element to "registered"; or
- for the contact address which remain unchanged, if any, leave the <contact> element unmodified;

III) has been automatically registered, and have not been previously automatically registered:

- set the <unknown-param> element to any additional header parameters contained in the contact header of the original REGISTER request according to RFC 3680 [43];
- set the state attribute within the <registration> element to "active";
- set the state attribute within the <contact> element to "active"; and
- set the event attribute within the <contact> element to "created"; and

5) set the P-Charging-Vector header with the icid parameter populated as specified in 3GPP TS 32.260 [17].

The S-CSCF shall only include the non-barred public user identities in the NOTIFY request.

EXAMPLE: If sip:user1_public1@home1.net is registered, the public user identity sip:user1_public2@home1.net can automatically be registered. Therefore the entries in the body of the NOTIFY request look like:

```
<?xml version="1.0"?>
<reginfo xmlns="urn:ietf:params:xml:ns:reginfo"
  version="0" state="full">
  <registration aor="sip:user1_public1@home1.net" id="as9"
    state="active">
    <contact id="76" state="active" event="registered">
      <uri>sip:[5555::aaa:bbb:ccc:ddd]</uri>
      <unknown-param name="audio"/>
    </contact>
  </registration>
  <registration aor="sip:user1_public2@home1.net" id="as10"
    state="active">
    <contact id="86" state="active" event="created">
      <uri>sip:[5555::aaa:bbb:ccc:ddd]</uri>
      <unknown-param name="audio"/>
    </contact>
  </registration>
</reginfo>
```

When sending a final NOTIFY request with all <registration> element(s) having their state attribute set to "terminated" (i.e. all public user identities have been deregistered or expired), the S-CSCF shall also terminate the subscription to the registration event package by setting the Subscription-State header to the value of "terminated".

When all UE's contact addresses have been deregistered (i.e. there is no <contact> element set to "active" for this UE), the S-CSCF shall consider subscription to the reg event package belonging to the UE cancelled (i.e. as if the UE had sent a SUBSCRIBE request with an Expires header containing a value of zero).

The S-CSCF shall only include the non-barred public user identities in the NOTIFY request.

5.4.3 General treatment for all dialogs and standalone transactions excluding requests terminated by the S-CSCF

5.4.3.1 Determination of mobile-originated or mobile-terminated case

Upon receipt of an initial request or a target refresh request or a stand-alone transaction, the S-CSCF shall:

- perform the procedures for the mobile-originating case as described in subclause 5.4.3.2 if the request makes use of the information for mobile-originating calls, which was added to the Service-Route header entry of the S-CSCF during registration (see subclause 5.4.1.2), e.g. the message is received at a certain port or the topmost Route header contains a specific user part or parameter; or,

- perform the procedures for the mobile-originating case as described in subclause 5.4.3.2 if the topmost Route header of the request contains the "orig" parameter. The S-CSCF shall remove the "orig" parameter from the topmost Route header; or,
- perform the procedures for the mobile-terminating case as described in subclause 5.4.3.3 if this information is not used by the request.

5.4.3.2 Requests initiated by the served user

When the S-CSCF receives from the served user or from a PSI an initial request for a dialog or a request for a standalone transaction, prior to forwarding the request, the S-CSCF shall:

Editor's Note: It needs to be stated, that the S-CSCF will only perform the following steps if the request was received from a trusted entity, e.g. an entity within the trust domain.

- 1) determine whether the request contains a barred public user identity in the P-Asserted-Identity header field of the request or not. In case the said header field contains a barred public user identity for the user, then the S-CSCF shall reject the request by generating a 403 (Forbidden) response. The response may include a Warning header containing the warn-code 399. Otherwise, continue with the rest of the steps;

NOTE 1: If the P-Asserted-Identity header field contains a barred public user identity, then the message has been received, either directly or indirectly, from a non-compliant entity which should have had generated the content with a non-barred public user identity.

- 2) remove its own SIP URI from the topmost Route header;
- 3) check if an original dialog identifier that the S-CSCF previously placed in a Route header is present in the topmost Route header of the incoming request. If present, it indicates an association with an existing dialog, the request has been sent from an AS in response to a previously sent request;
- 4) check whether the initial request matches the next unexecuted initial filter criteria based on a public user identity in the P-Asserted-Identity header in the priority order as described in 3GPP TS 23.218 [5], and if it does, the S-CSCF shall:
 - a) insert the AS URI to be contacted into the Route header as the topmost entry followed by its own URI populated as specified in the subclause 5.4.3.4; and
 - b) if the AS is located outside the trust domain then the S-CSCF shall remove the P-Access-Network-Info header field and its values in the request; if the AS is located within the trust domain, then the S-CSCF shall retain the P-Access-Network-Info header field and its values in the request that is forwarded to the AS;

NOTE 2: Depending on the result of processing the filter criteria the S-CSCF might contact one or more AS(s) before processing the outgoing Request URI.

- 5) if there is no original dialog identifier present in the topmost Route header of the incoming request store the value of the icid parameter received in the P-Charging-Vector header and retain the icid parameter in the P-Charging-Vector header. Optionally, the S-CSCF may generate a new, globally unique icid and insert the new value in the icid parameter of the P-Charging-Vector header when forwarding the message. If the S-CSCF creates a new icid, then it is responsible for maintaining the two icid values in the subsequent messaging;
- 6) if there is no original dialog identifier present in the topmost Route header of the incoming request insert an orig-ioi parameter into the P-Charging-Vector header. The S-CSCF shall set the orig-ioi parameter to a value that identifies the sending network. The S-CSCF shall not include the term-ioi parameter;
- 7) if there is no original dialog identifier present in the topmost Route header of the incoming request insert a P-Charging-Function-Addresses header populated with values received from the HSS if the message is forwarded within the S-CSCF home network, including towards AS;
- 8) if there is no original dialog identifier present in the topmost Route header of the incoming request and if the S-CSCF has knowledge of an associated tel-URI for a SIP URI contained in the received P-Asserted-Identity header, add a second P-Asserted-Identity header containing this tel-URI;
- 9) if the request is not forwarded to an AS and if the outgoing Request-URI is a TEL URL, the S-CSCF shall translate the E.164 address (see draft-ietf-iptel-rfc2806bis [22]) to a globally routeable SIP URI using an ENUM/DNS translation mechanism with the format specified in RFC 3761 [24]. Databases aspects of ENUM are

outside the scope of the present document. If this translation fails, the request may be forwarded to a BGCF or any other appropriate entity (e.g. a MRFC to play an announcement) in the originator's home network or the S-CSCF may send an appropriate SIP response to the originator. If the outgoing Request-URI is a pres URI or an im URI, the S-CSCF shall forward the request as specified in RFC 3861 [63]. In this case, the S-CSCF shall not modify the received Request-URI;

- 10) determine the destination address (e.g. DNS access) using the URI placed in the topmost Route header if present, otherwise based on the Request-URI. If the destination address is of an IP address type other than the IP address type used in the IM CN subsystem, then the S-CSCF shall forward the request to the IMS-ALG if the IM CN subsystem supports interworking to networks with different IP address type;
- 11) if network hiding is needed due to local policy, put the address of the I-CSCF (THIG) to the topmost route header;
- 12) in case of an initial request for a dialog originated from a served user, either:
 - if the request is routed to an AS which is part of the trust domain, the S-CSCF can decide whether to record-route or not. The decision is configured in the S-CSCF using any information in the received request that may otherwise be used for the initial filter criteria. If the request is record-routed the S-CSCF shall create a Record-Route header containing its own SIP URI; or
 - if the request is routed elsewhere, create a Record-Route header containing its own SIP URI;

NOTE 3: For requests originated from a PSI the S-CSCF can decide whether to record-route or not.

Editor's Note: It needs to be clarified how the S-CSCF decides whether to put its address into the Record-Route header in the case of handling a request that originates from a PSI. It might be part of the operators policy.

- 13) based on local policy rules and the destination user (Request-URI), remove the P-Access-Network-Info header prior to forwarding the message;
- 14) route the request based on SIP routing procedures; and
- 15) if the request is an INVITE request, save the Contact, Cseq and Record-Route header field values received in the request such that the S-CSCF is able to release the session if needed.

When the S-CSCF receives any response to the above request, the S-CSCF may:

- 1) apply any privacy required by RFC 3323 [33] and RFC 3325 [34] to the P-Asserted-Identity header; and
- 2) apply the same privacy mechanism to the P-Access-Network-Info header, if present.

NOTE 4: The P-Asserted-Identity header would normally only be expected in 1xx or 2xx responses.

NOTE 5: The optional procedures above are in addition to any procedure for the application of privacy at the edge of the trust domain specified by RFC 3325 [34].

When the S-CSCF receives any response to the above request containing a term-ioi parameter, the S-CSCF shall store the value of the received term-ioi parameter received in the P-Charging-Vector header, if present. The term-ioi parameter identifies the sending network of the response message. The term-ioi parameter and the orig-ioi parameter shall only be retained in the P-Charging-Vector header if the next hop is to an AS.

When the S-CSCF receives a 1xx or 2xx response to the initial request for a dialog, if the response corresponds to an INVITE request, the S-CSCF shall save the Contact and Record-Route header field values in the response in order to be able to release the session if needed.

When the S-CSCF receives from the served user a target refresh request for a dialog, prior to forwarding the request the S-CSCF shall:

- 1) remove its own URI from the topmost Route header;
- 2) create a Record-Route header containing its own SIP URI;
- 3) if the request is an INVITE request, save the Contact, Cseq and Record-Route header field values received in the request such that the S-CSCF is able to release the session if needed;

- 4) in case the request is routed to an AS located outside the trust domain, remove the P-Access-Network-Info header;
- 5) in case the request is routed towards the destination user (Request-URI) based on local policy rules and the destination user (Request-URI), remove the P-Access-Network-Info header; and
- 6) route the request based on the topmost Route header.

When the S-CSCF receives a 1xx or 2xx response to the target refresh request for a dialog, if the response corresponds to an INVITE request, the S-CSCF shall save the Contact and Record-Route header field values in the response such that the S-CSCF is able to release the session if needed.

When the S-CSCF receives from the served user a subsequent request other than a target refresh request for a dialog, prior to forwarding the request the S-CSCF shall:

- 1) remove its own URI from the topmost Route header;
- 2) in case the request is routed to an AS located outside the trust domain, remove the P-Access-Network-Info header; and
- 3) in case the request is routed towards the destination user (Request-URI) based on local policy rules and the destination user (Request-URI), remove the P-Access-Network-Info header; and
- 4) route the request based on the topmost Route header.

5.4.3.3 Requests terminated at the served user

When the S-CSCF receives, destined for a statically pre-configured PSI or a registered served user, an initial request for a dialog or a request for a standalone transaction, prior to forwarding the request, the S-CSCF shall:

- 1) determine whether the request contains a barred public user identity in the Request-URI of the request or not. In case the Request URI contains a barred public user identity for the user, then the S-CSCF shall reject the request by generating a 404 (Not Found) response. Otherwise, continue with the rest of the steps;
- 2) remove its own URI from the topmost Route header;
- 3) check if an original dialog identifier that the S-CSCF previously placed in a Route header is present in the topmost Route header of the incoming request.
 - If present, it indicates an association with an existing dialog, the request has been sent from an AS in response to a previously sent request.
 - If not present, it indicates that the request is visiting the S-CSCF for the first time, and in this case the S-CSCF shall save the Request-URI from the request;
- 4) check whether the initial request matches the next unexecuted initial filter criteria in the priority order and apply the filter criteria on the SIP method as described in 3GPP TS 23.218 [5] subclause 6.5. If there is a match, then insert the AS URI to be contacted into the Route header as the topmost entry followed by its own URI populated as specified in the subclause 5.4.3.4;

NOTE 1: Depending on the result of the previous process, the S-CSCF may contact one or more AS(s) before processing the outgoing Request-URI.

- 5) if there is no original dialog identifier present in the topmost Route header of the incoming request insert a P-Charging-Function-Addresses header field, if not present, populated with values received from the HSS if the message is forwarded within the S-CSCF home network, including towards AS;
- 6) if there is no original dialog identifier present in the topmost Route header of the incoming request store the value of the icid parameter received in the P-Charging-Vector header and retain the icid parameter in the P-Charging-Vector header;
- 7) if there is no original dialog identifier present in the topmost Route header of the incoming request store the value of the orig-ioi parameter received in the P-Charging-Vector header, if present. The orig-ioi parameter identifies the sending network of the request message. The orig-ioi parameter shall only be retained in the P-Charging-Vector header if the next hop is to an AS;

- 8) check whether the Request-URI equals to the saved value of the Request-URI. If there is no match, then:
 - a) if the request is an INVITE request, save the Contact, CSeq and Record-Route header field values received in the request such that the S-CSCF is able to release the session if needed; and
 - b) forward the request based on the Request-URI and skip the following steps;If there is a match, then continue with the further steps;
 - 9) if necessary perform the caller preferences to callee capabilities matching according to RFC 3841 [56B];
 - 10) in case there are no Route headers in the request, then determine, from the destination public user identity, the list of preloaded routes saved during registration or re-registration, as described in subclause 5.4.1.2. Furthermore, the S-CSCF shall:
 - a) build the Route header field with the values determined in the previous step;
 - b) determine, from the destination public user identity, the saved Contact URI where the user is reachable saved at registration or reregistration, as described in subclause 5.4.1.2. If there is more than one contact address saved for the destination public user identity, the S-CSCF shall:
 - if the fork directive in the Request Disposition header was set to "no-fork", the contact with the highest qvalue parameter shall be used when building the Request-URI. In case no qvalue parameters were provided, the S-CSCF shall decide locally what contact address to be used when building the Request-URI; otherwise
 - fork the request or perform sequential search based on the relative preference indicated by the qvalue parameter of the Contact header in the original REGISTER request, as described in RFC3261 [26]. In case no qvalue parameters were provided, then the S-CSCF determine the contact address to be used when building the Request-URI as directed by the Request Disposition header as described in RFC 3841 [56B]. If the Request-Disposition header is not present, the S-CSCF shall decide locally whether to fork or perform sequential search among the contact addresses;
 - c) build a Request-URI with the contents of the saved Contact URI determined in the previous step; and
 - d) insert a P-Called-Party-ID SIP header field including the Request-URI received in the request;
 - 11) if the request is an INVITE request, save the Contact, CSeq and Record-Route header field values received in the request such that the S-CSCF is able to release the session if needed;
 - 12) optionally, apply any privacy required by RFC 3323 [33] and RFC 3325 [34] to the P-Asserted-Identity header and apply the same privacy mechanism to the P-Access-Network-Info header;
- NOTE 2: The optional procedure above is in addition to any procedure for the application of privacy at the edge of the trust domain specified by RFC 3325 [34].
- 13) in case of an initial request for a dialog, either:
 - if the request is routed to an AS which is part of the trust domain, the S-CSCF can decide whether to record-route or not. The decision is configured in the S-CSCF using any information in the received request that may otherwise be used for the initial filter criteria. If the request is record-routed the S-CSCF shall create a Record-Route header containing its own SIP URI; or
 - if the request is routed elsewhere, create a Record-Route header containing its own SIP URI; and
 - 14) forward the request based on the topmost Route header.
- When the S-CSCF receives, destined for an unregistered user, an initial request for a dialog or a request for a standalone transaction, the S-CSCF shall:
- 1) if the S-CSCF does not have the user profile, then initiate the S-CSCF Registration/deregistration notification with the purpose of downloading the relevant user profile (i.e. for unregistered user) and informing the HSS that the user is unregistered, but this S-CSCF will assess triggering of services for the unregistered user, as described in 3GPP TS 29.228 [14];

- 2) execute the procedures described in the steps 1, 2 and 3 in the above paragraph (when the S-CSCF receives, destined for the registered served user, an initial request for a dialog or a request for a standalone transaction); and
- 3) execute the procedure described in step 4, 5, 6, 7, 8, 10, 12 and 13 in the above paragraph (when the S-CSCF receives, destined for the registered served user, an initial request for a dialog or a request for a standalone transaction).

In case that no AS needs to be contacted, then S-CSCF shall return an appropriate unsuccessful SIP response. This response may be a 480 (Temporarily unavailable) and terminate these procedures.

When the S-CSCF receives a 1xx or 2xx response to the initial request for a dialog (whether the user is registered or not), it shall:

- 1) if the response corresponds to an INVITE request, save the Contact and Record-Route header field values in the response such that the S-CSCF is able to release the session if needed;
- 2) insert a term-ioi parameter in the P-Charging-Vector header of the outgoing response. The S-CSCF shall set the term-ioi parameter to a value that identifies the sending network of the response and the orig-ioi parameter is set to the previously received value of orig-ioi;
- 3) in the case where the S-CSCF has knowledge of an associated tel-URL for a SIP URI contained in the received P-Asserted-Identity header, the S-CSCF shall add a second P-Asserted-Identity header containing this tel-URL;
- 4) in case the response is forwarded to an AS that is located within the trust domain, the S-CSCF shall retain the P-Access-Network-Info header; otherwise, the S-CSCF shall remove the P-Access-Network-Info header; and
- 5) in case the response is sent towards the originating user, the S-CSCF may remove the P-Access-Network-Info header based on local policy rules and the destination user (Request-URI).

When the S-CSCF receives a response to a request for a standalone transaction (whether the user is registered or not), in the case where the S-CSCF has knowledge of an associated tel-URL for a SIP URI contained in the received P-Asserted-Identity header, the S-CSCF shall add a second P-Asserted-Identity header containing this tel-URL. In case the response is forwarded to an AS that is located within the trust domain, the S-CSCF shall retain the P-Access-Network-Info header; otherwise, the S-CSCF shall remove the P-Access-Network-Info header. In case the response is sent towards the terminating user, the S-CSCF may remove the header based on local policy rules and the destination user (Request-URI).

When the S-CSCF receives the 200 (OK) response for a standalone transaction request, the S-CSCF shall:

- 1) insert a P-Charging-Function-Addresses header populated with values received from the HSS if the message is forwarded within the S-CSCF home network, including towards an AS; and
- 2) insert a term-ioi parameter in the P-Charging-Vector header of the outgoing response. The S-CSCF shall set the term-ioi parameter to a value that identifies the sending network of the response and the orig-ioi parameter is set to the previously received value of orig-ioi.

When the S-CSCF receives, destined for a served user, a target refresh request for a dialog, prior to forwarding the request, the S-CSCF shall:

- 1) remove its own URI from the topmost Route header;
- 2) if the request is an INVITE request, save the Contact, Cseq and Record-Route header field values received in the request such that the S-CSCF is able to release the session if needed;
- 3) create a Record-Route header containing its own SIP URI; and
- 4) forward the request based on the topmost Route header.

When the S-CSCF receives a 1xx or 2xx response to the target refresh request for a dialog (whether the user is registered or not), the S-CSCF shall:

- 1) if the response corresponds to an INVITE request, save the Record-Route and Contact header field values in the response such that the S-CSCF is able to release the session if needed; and

- 2) in case the response is forwarded to an AS that is located within the trust domain, the S-CSCF shall retain the P-Access-Network-Info header; otherwise, the S-CSCF shall remove the P-Access-Network-Info header. In case the response is sent towards the originating user, the S-CSCF may remove the header based on local policy rules and the destination user (Request-URI).

When the S-CSCF receives, destined for the served user, a subsequent request other than target refresh request for a dialog, prior to forwarding the request, the S-CSCF shall:

- 1) remove its own URI from the topmost Route header; and
- 2) forward the request based on the topmost Route header.

When the S-CSCF receives a response to a subsequent request other than target refresh request for a dialog, in case the response is forwarded to an AS that is located within the trust domain, the S-CSCF shall retain the P-Access-Network-Info header; otherwise, the S-CSCF shall remove the P-Access-Network-Info header. In case the response is sent towards the terminating user, the S-CSCF may remove the header based on local policy rules and the destination user (Request-URI).

5.4.3.4 Original dialog identifier

The original dialog identifier is an implementation specific token that the S-CSCF encodes into the own S-CSCF URI in a Route header, prior to forwarding the request to an AS. This is possible because the S-CSCF is the only entity that creates and consumes the value.

The token identifies the original dialog of the request, so in case an AS acting as a B2BUA changes the dialog, the S-CSCF is able to identify the original dialog when the request returns to the S-CSCF. The token can be encoded in different ways, such as e.g., a character string in the user-part of the S-CSCF URI, a parameter in the S-CSCF URI or port number in the S-CSCF URI.

The S-CSCF shall ensure that the value chosen is unique so that the S-CSCF may recognize the value when received in a subsequent message and make the proper association between related dialogs that pass through an AS.

5.4.3.5 Void

5.4.4 Call initiation

5.4.4.1 Initial INVITE

When the S-CSCF receives an INVITE request, either from the served user or destined to the served user, the S-CSCF may require the periodic refreshment of the session to avoid hung states in the S-CSCF. If the S-CSCF requires the session to be refreshed, it shall apply the procedures described in draft-ietf-sip-session-timer [58] clause 8.

NOTE: Requesting the session to be refreshed requires support by at least one of the UEs. This functionality cannot automatically be granted, i.e. at least one of the involved UEs needs to support it.

5.4.4.2 Subsequent requests

5.4.4.2.1 Mobile-originating case

When the S-CSCF receives any 1xx or 2xx response, the S-CSCF shall insert a P-Charging-Function-Addresses header populated with values received from the HSS if the message is forwarded within the S-CSCF home network, including towards AS.

When the S-CSCF receives the request containing the access-network-charging-info parameter in the P-Charging-Vector, the S-CSCF shall store the access-network-charging-info parameter from the P-Charging-Vector header. The S-CSCF shall retain access-network-charging-info parameter in the P-Charging-Vector header when the request is forwarded to an AS. However, the S-CSCF shall not include the access-network-charging-info parameter in the P-Charging-Vector header when the request is forwarded outside the home network of the S-CSCF.

When the S-CSCF receives any request or response (excluding ACK requests and CANCEL requests and responses) related to a mobile-originated dialog or standalone transaction, the S-CSCF may insert previously saved values into P-

Charging-Vector and P-Charging-Function-Addresses headers before forwarding the message within the S-CSCF home network, including towards AS.

5.4.4.2.2 Mobile-terminating case

When the S-CSCF receives the any 1xx or 2xx response, the S-CSCF shall insert a P-Charging-Function-Addresses header populated with values received from the HSS if the message is forwarded within the S-CSCF home network, including towards AS.

When the S-CSCF receives 180 (Ringing) or 200 (OK) (to INVITE) responses containing the access-network-charging-info parameter in the P-Charging-Vector, the S-CSCF shall store the access-network-charging-info parameter from the P-Charging-Vector header. The S-CSCF shall retain the access-network-charging-info parameter in the P-Charging-Vector header when the response is forwarded to an AS. However, the S-CSCF shall not include the access-network-charging-info parameter in the P-Charging-Vector header when the response is forwarded outside the home network of the S-CSCF.

When the S-CSCF receives any request or response (excluding ACK requests and CANCEL requests and responses) related to a mobile-originated dialog or standalone transaction, the S-CSCF may insert previously saved values into P-Charging-Vector and P-Charging-Function-Addresses headers before forwarding the message within the S-CSCF home network, including towards AS.

5.4.5 Call release

5.4.5.1 S-CSCF-initiated session release

5.4.5.1.1 Cancellation of a session currently being established

Upon receipt of a network internal indication to release a session which is currently being established, the S-CSCF shall cancel the related dialogs by sending the CANCEL request according to the procedures described in RFC 3261 [26].

5.4.5.1.2 Release of an existing session

Upon receipt of a network internal indication to release an existing multimedia session, the S-CSCF shall:

- 1) generate a first BYE request for the called user based on the information saved for the related dialog, including:
 - a Request-URI, set to the stored Contact header provided by the called user;
 - a To header, set to the To header value as received in the 200 OK response for the initial INVITE request;
 - a From header, set to the From header value as received in the initial INVITE request;
 - a Call-ID header, set to the Call-Id header value as received in the initial INVITE request;
 - a CSeq header, set to the CSeq value that was stored for the direction from the calling to the called user, incremented by one;
 - a Route header, set to the routing information towards the called user as stored for the dialog;
 - further headers, based on local policy or the requested session release reason.
- 2) generate a second BYE request for the calling user based on the information saved for the related dialog, including:
 - a Request-URI, set to the stored Contact header provided by the calling user;
 - a To header, set to the From header value as received in the initial INVITE request;
 - a From header, set to the To header value as received in the 200 OK response for the initial INVITE request;
 - a Call-ID header, set to the Call-Id header value as received in the initial INVITE request;

- a CSeq header, set to the CSeq value that was stored for the direction from the called to the calling user, incremented by one – if no CSeq value was stored for that session it shall generate and apply a random number within the valid range for CSeqs;
 - a Route header, set to the routing information towards the calling user as stored for the dialog;
 - further headers, based on local policy or the requested session release reason.
- 3) if the S-CSCF serves the calling user, treat the first BYE request as if received directly from the calling user, i.e. send it to internal service control and based on the outcome further on towards the called user;
 - 4) if the S-CSCF serves the calling user, send the second BYE request directly to the calling user.
 - 5) if the S-CSCF serves the called user, send the first BYE request directly to the called user;
 - 6) if the S-CSCF serves the called user, treat the second BYE request as if received directly from the called user, i.e. shall send it to internal service control and based on the outcome further on towards to the calling user.

Upon receipt of the 2xx responses for both BYE requests, the S-CSCF shall release all information related to the dialog and the related multimedia session.

5.4.5.1.2A Release of the existing dialogs due to registration expiration

When the registration lifetime of the only public user identity currently registered with its associated set of implicitly registered public user identities (i.e. no other is registered) expires while there are still active multimedia sessions belonging to the served user, the S-CSCF shall release each multimedia session belonging to the served user by applying the steps listed in the subclause 5.4.5.1.2.

5.4.5.1.3 Abnormal cases

Upon receipt of a request on a dialog for which the S-CSCF initiated session release, the S-CSCF shall terminate the received request and answer it with a 481 (Call/Transaction Does Not Exist) response.

5.4.5.2 Session release initiated by any other entity

Upon receipt of a 2xx response for a BYE request matching an existing dialog, the S-CSCF shall delete all the stored information related to the dialog.

5.4.5.3 Session expiration

If the S-CSCF requested the session to be refreshed periodically, and the S-CSCF got the indication that the session will be refreshed, when the session timer expires, the S-CSCF shall delete all the stored information related to the dialog.

5.4.6 Call-related requests

5.4.6.1 ReINVITE

5.4.6.1.1 Determination of served user

Void.

5.4.6.1.2 Mobile-originating case

For a reINVITE request from the UE, when the S-CSCF receives the UPDATE request, the S-CSCF shall store the updated access-network-charging-info parameter from P-Charging-Vector header. The S-CSCF shall retain the access-network-charging-info parameter in the P-Charging-Vector header when the request is forwarded to an AS. However, the S-CSCF shall not include the access-network-charging-info parameter in the P-Charging-Vector header when the UPDATE request is forwarded outside the home network of the S-CSCF.

For a reINVITE request from the UE, if the request is to be forwarded to an AS that is located within the trust domain, the S-CSCF shall retain the P-Access-Network-Info header; otherwise, the S-CSCF shall remove the P-Access-Network-Info header.

5.4.6.1.3 Mobile-terminating case

For a reINVITE request destined towards the UE, when the S-CSCF receives the 200 (OK) response (to the INVITE), the S-CSCF shall store the updated access-network-charging-info parameter from the P-Charging-Vector header. The S-CSCF shall retain the access-network-charging-info parameter in the P-Charging-Vector header when the response is forwarded to the AS. However, the S-CSCF shall include the access-network-charging-info parameter in the P-Charging-Vector header when the 200 (OK) response is forwarded outside the home network of the S-CSCF.

For any SIP response to an INVITE request, if the response is to be forwarded to an AS that is located within the trust domain, the S-CSCF shall retain the P-Access-Network-Info header; otherwise, the S-CSCF shall remove the P-Access-Network-Info header.

5.4.7 Void

5.5 Procedures at the MGCF

5.5.1 General

The MGCF, although acting as a UA, does not initiate any registration of its associated addresses. These are assumed to be known by peer-to-peer arrangements within the IM CN subsystem. Therefore table A.4/1 and dependencies on that major capability shall not apply.

The use of the Path and Service-Route headers shall not be supported by the MGCF.

When the MGCF sends any request or response related to a dialog or standalone transaction, the MGCF may insert previously saved values into P-Charging-Vector and P-Charging-Function-Addresses headers before sending the message.

5.5.2 Subscription and notification

Void.

5.5.3 Call initiation

5.5.3.1 Initial INVITE

5.5.3.1.1 Calls originated from circuit-switched networks

When the MGCF receives an indication of an incoming call from a circuit-switched network, the MGCF shall:

- generate and send an INVITE request to I-CSCF:
 - set the Request-URI to the "tel" format using an E.164 address;
 - set the Supported header to "100rel" (see RFC 3312 [30]);
 - include an P-Asserted-Identity header;
 - create a new, globally unique value for the icid parameter and insert it into the P-Charging-Vector header; and
 - insert an orig-ioi parameter into the P-Charging-Vector header. The orig-ioi parameter shall be set to a value that identifies the sending network in which the MGCF resides and the term-ioi parameter shall not be included.

5.5.3.1.2 Calls terminating in circuit-switched networks

When the MGCF receives an initial INVITE request with Supported header indicating "100rel", the MGCF shall:

- send 100 (Trying) response;
- after a matching codec is found at the MGW, send 183 "Session Progress" response:
 - set the Require header to the value of "100rel";
 - store the values received in the P-Charging-Function-Addresses header;
 - store the value of the icid parameter received in the P-Charging-Vector header; and
 - insert a term-ioi parameter into the P-Charging-Vector header. The term-ioi parameter shall be set to a value that identifies the network in which the MGCF resides.

When the MGCF does not find an available matching codec at the MGW for the received initial INVITE request, the MGCF shall:

- send 503 (Service Unavailable) response if the type of codec was acceptable but none were available; or
- send 488 (Not Acceptable Here) response if the type of codec was not supported, and may include SDP in the message body to indicate the codecs supported by the MGCF/MGW.

5.5.3.2 Subsequent requests

5.5.3.2.1 Calls originating in circuit-switched networks

When the MGCF receives 183 response to an INVITE request, the MGCF shall:

- store the values received in the P-Charging-Function-Addresses header.

When the MGCF receives 200 (OK) response to a PRACK request and notification that bearer setup is complete, the MGCF shall:

- send an UPDATE request.

5.5.3.2.2 Calls terminating in circuit-switched networks

When the MGCF receives an indication of a ringing for the called party of outgoing call to a circuit-switched network, the MGCF shall:

- send 180 Ringing to the UE.

When the MGCF receives an indication of answer for the called party of outgoing call to a circuit-switched network, the MGCF shall:

- send 200 OK to the UE, including an P-Asserted-Identity header.

5.5.4 Call release

5.5.4.1 Call release initiated by a circuit-switched network

When the MGCF receives an indication of call release from a circuit-switched network, the MGCF shall:

- send a BYE request to the UE.

5.5.4.2 IM CN subsystem initiated call release

NOTE: The release of a call towards the circuit-switched network additionally requires signaling procedures other than SIP in the MGCF that are outside the scope of this document.

5.5.4.3 MGW-initiated call release

When the MGCF receives an indication from the MGW that the bearer was lost, the MGCF shall:

- send a BYE request towards the UE; and
- may include Error-Info header with a pointer to additional information indicating that bearer was lost.

5.5.5 Call-related requests

5.5.5.1 ReINVITE

5.5.5.1.1 Calls originating from circuit-switched networks

Void.

5.5.5.1.2 Calls terminating in circuit-switched networks

When the MGCF receives a reINVITE request for hold/resume operation, the MGCF shall:

- send 100 (Trying) response;
- after performing interaction with MGW to hold/resume the media flow, send 200 (OK) response.

5.5.6 Further initial requests

When the MGCF responds to an OPTIONS request with a 200 (OK) response, the MGCF may include a message body with an indication of the DTMF capabilities and supported codecs of the MGCF/MGW.

NOTE: The detailed interface for requesting MGCF/MGW capabilities is not specified in this version of the document. Other solutions may be used in the interim.

5.6 Procedures at the BGCF

5.6.1 General

The use of the Path and Service-Route headers shall not be supported by the BGCF.

When the BGCF receives any request or response (excluding ACK requests and CANCEL requests and responses) related to a dialog or standalone transaction, the BGCF may insert previously saved values into P-Charging-Vector and P-Charging-Function-Addresses headers before forwarding the message.

5.6.2 Session initiation transaction

When the BGCF receives an INVITE request, the BGCF shall forward the request either to an MGCF within its own network, or to another network containing an MGCF. The BGCF need not Record-Route the INVITE request. While the next entity may be a MGCF acting as a UA, the BGCF shall not apply the procedures of RFC 3323 [33] relating to privacy. The BGCF shall store the values received in the P-Charging-Function-Addresses header. The BGCF shall store the value of the icid parameter received in the P-Charging-Vector header and retain the icid parameter in the P-Charging-Vector header.

NOTE 1: The means by which the decision is made to forward to an MGCF or to another network is outside the scope of the present document, but may be by means of a lookup to an external database, or may be by data held internally to the BGCF.

When the BGCF receives an INVITE request, if the BGCF inserts its own Record-Route header, the BGCF may require the periodic refreshment of the session to avoid hung states in the BGCF. If the BGCF requires the session to be refreshed, it shall apply the procedures described in draft-ietf-sip-session-timer [58] clause 8.

NOTE 2: Requesting the session to be refreshed requires support by at least one of the UEs. This functionality cannot automatically be granted, i.e. at least one of the involved UEs needs to support it.

5.7 Procedures at the Application Server (AS)

5.7.1 Common Application Server (AS) procedures

5.7.1.1 Notification about registration status

The AS may support the REGISTER method in order to discover the registration status of the user. If a REGISTER request arrives containing information about the user's registration status and the AS supports the REGISTER method, the AS shall store the Expires parameter from the request and generate a 200 (OK) response or an appropriate failure response. For the success case, the 200 (OK) response shall contain Expires value equal to the value received in the REGISTER request. The AS shall store the values received in P-Charging-Function-Addresses header. Also, the AS shall store the values of the icid parameter in the P-Charging-Vector header from the REGISTER request.

Upon receipt of a third-party REGISTER request, the AS may subscribe to the reg event package for the public user identity registered at the users registrar (S-CSCF) as described in RFC 3680 [43].

On sending a SUBSCRIBE request, the AS shall populate the header fields as follows:

- a) a Request URI set to the resource to which the AS wants to be subscribed to, i.e. to a SIP URI that contains the public user identity of the user that was received in the To header field of the third-party REGISTER request;
- b) a From header field set to the AS's SIP URI;
- c) a To header field, set to a SIP URI that contains the public user identity of the user that was received in the To header field of the third-party REGISTER request;
- d) an Event header set to the "reg" event package;
- e) a P-Asserted-Identity header field set to the SIP URI of the AS; and

NOTE 1: The S-CSCF expects the SIP URI used in the P-Asserted-Identity header to correspond to the SIP URI, which identified this AS in the initial filter criteria of the user to whose registration state the AS subscribes to.

- f) a P-Charging-Vector header with the icid parameter populated as specified in 3GPP TS 32.260 [17].

Upon receipt of a 2xx response to the SUBSCRIBE request, the AS shall store the information for the so established dialog and the expiration time as indicated in the Expires header of the received response.

NOTE 2: Upon receipt of a NOTIFY request with all <registration> element(s) having their state attribute set to "terminated" (i.e. all public user identities are deregistered) and the Subscription-State header set to "terminated", the AS considers the subscription to the reg event package terminated, i.e. as if the AS had sent a SUBSCRIBE request with an Expires header containing a value of zero.

5.7.1.2 Extracting charging correlation information

When an AS receives an initial request for a dialog or a request (excluding ACK requests and CANCEL requests and responses) for a standalone transaction, the AS shall store the values received in the P-Charging-Vector header, e.g. icid parameter, and retain the P-Charging-Vector header in the message. The AS shall store the values received in the P-Charging-Function-Addresses header and retain the P-Charging-Function-Addresses header in the message.

When an AS sends any request or response related to a dialog or standalone transaction, the AS may insert previously saved values into the P-Charging-Vector and P-Charging-Function-Addresses headers before sending the message.

5.7.1.3 Access-Network-Info

The AS may receive in any request or response (excluding ACK requests and CANCEL requests and responses) information about the served user access network. This information is contained in the P-Access-Network-Info header. The AS can use the header to provide an appropriate service to the user.

5.7.1.4 User identify verification at the AS

The procedures at the AS to accomplish user identity verification are described with the help of figure 5-1.

When the AS receives a SIP initial or standalone request that does not contain credentials, the AS shall:

Editor's Note: it is not clear what are the mechanisms available to transport the credentials. These mechanisms can include, among others, P-Asserted-Identity, Authorization header, digital signatures, S/MIME body, etc.

- a) if a Privacy header is present in the initial or standalone request and the Privacy header value is set to "id" or "user", then the user and the request are considered as anonymous, and no further actions are required. The AS shall consider the request as authenticated;
- b) if there is no Privacy header present in the initial or standalone request, or if the Privacy header contains a value other than "id" or "user", then the AS shall check for the presence of a P-Asserted-Identity header in the initial or standalone request. Two cases exist:
 - i) the initial or standalone request contains a P-Asserted-Identity header. This is typically the case when the user is located inside a trusted domain as defined by subclause 4.4. In this case, the AS is aware of the identity of the user and no extra actions are needed. The AS shall consider the request as authenticated.
 - ii) the initial or standalone request does not contain a P-Asserted-Identity header. This is typically the case when the user is located outside a trusted domain as defined by subclause 4.4. In this case, the AS does not have a verified identity of the user. The AS shall check the From header of the initial or standalone request. If the From header value in the initial or standalone request is set to "Anonymous", then the user and the request are considered as anonymous and no further actions are required. If the From header value does not indicate anonymity, then the AS shall challenge the user by issuing a 401 (Unauthorized) response including a challenge as per procedures described in RFC 3261 [26].

When the AS receives a SIP initial or standalone request that contains credentials but it does not contain a P-Asserted-Identity header the AS shall check the correctness of the credentials as follows:

- a) If the credentials are correct, then the AS shall consider the identity of the user verified, and the AS shall consider the request as authenticated;
- b) If the credentials are not correct, the AS may either rechallenge the user by issuing a 401 (Unauthorized) response including a challenge as per procedures described in RFC 3261 [26] (up to a predetermined maximum number of times predefined in the AS configuration data), or consider the user as anonymous. If the user is considered anonymous, the PS shall consider the request as authenticated.

Editor's Note: It needs to be investigated whether the *maximum number of times predefined in the AS configuration data* creates a potential denial of service attack, as it requires the AS to keep states between different authentications trials.

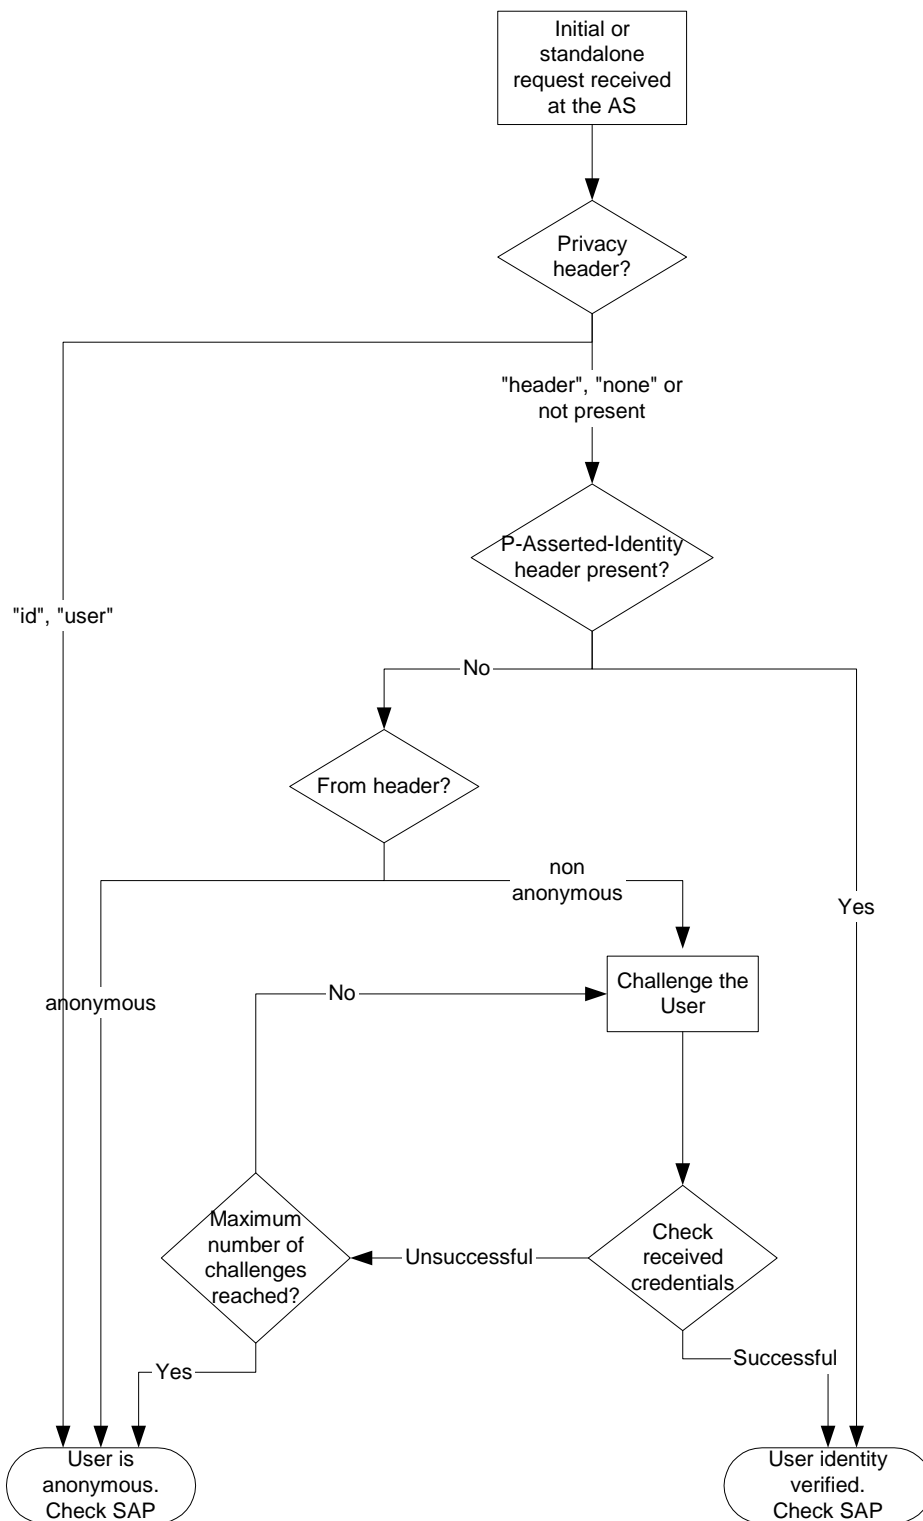


Figure 5-1: User identity verification flow at the AS

5.7.1.5 Request authorization

Once the AS have tried to verify the identity of the user, the AS either has a verified identity of the user or it considers the user as anonymous.

If the user is considered anonymous, the AS shall check whether the authorization policy defined for this request allows anonymous requests. If anonymous requests are allowed, then the AS can proceed with the requested functionality, otherwise, the AS shall not proceed with the requested functionality.

If the user is identified by an identity, the AS shall apply the authorization policy related to the requested functionality to detect whether the particular user is allowed to request the functionality. The authorization policy may require a verified identity of a user.

If the request is authorized then the AS shall continue with the procedures as defined for that request.

If the request is not authorized, the AS shall either:

- reject the request according to the procedures defined for that request e.g., by issuing a 403 (Forbidden) response; or
- send a 2xx final response if the authorization policy requires to deny the requested functionality, whilst appearing to the user as if the request has been granted.

5.7.1.6 Event notification throttling

If the AS has a local configuration information limiting the rate at which notification generation is allowed, then the AS shall take that information into account. Such local configuration information could be e.g. the shortest time period between issuing consecutive NOTIFY requests.

5.7.2 Application Server (AS) acting as terminating UA, or redirect server

When acting as a terminating UA the AS shall behave as defined for a UE in subclause 5.1.4, with the exceptions identified in this subclause.

The AS, although acting as a UA, does not initiate any registration of its associated addresses. These are assumed to be known by peer-to-peer arrangements within the IM CN subsystem.

An AS acting as redirect server shall propagate any received IM CN subsystem XML message body in the redirected message.

When an AS acting as a terminating UA generates a subsequent request that does not relate to an INVITE dialog, the AS shall insert a P-Charging-Vector header with the icid parameter populated as specified in 3GPP TS 32.260 [17].

5.7.3 Application Server (AS) acting as originating UA

When acting as an originating UA the AS shall behave as defined for a UE in subclause 5.1.3, with the exceptions identified in this subclause.

The AS, although acting as a UA, does not initiate any registration of its associated addresses. These are assumed to be known by peer-to-peer arrangements within the IM CN subsystem.

When an AS acting as an originating UA generates an initial request for a dialog or a request for a standalone transaction, the AS shall insert a P-Charging-Vector header with the icid parameter populated as specified in 3GPP TS 32.260 [17]. The AS may retrieve CCF and/or ECF addresses from HSS on Sh interface.

When an AS acting as an originating UA generates a subsequent request that does not relate to an INVITE dialog, the AS shall insert a P-Charging-Vector header with the icid parameter populated as specified in 3GPP TS 32.260 [17].

The AS shall extract charging function addresses from any P-Charging-Function-Addresses header that is received in any 1xx or 2xx responses to the requests.

The AS may also indicate that the proxies should not fork the INVITE request by including a "no-fork" directive within the Request-Disposition header in the initial INVITE request as described in RFC 3841 [56B].

When sending an initial request on behalf of a PSI that is hosted by the AS, the AS shall insert a Route header pointing to an S-CSCF of the home network of the PSI, if:

- the AS is not able to resolve the next hop address by itself; or
- the operator policy requires it.

NOTE 1: The address of the S-CSCF may be obtained by querying the HSS on the Sh interface or from static configuration.

When sending an initial request on behalf of a public user identity, the AS shall insert a Route header pointing to the S-CSCF where the public user identity on whose behalf the request is generated is registered or hosted (unregistered case).

NOTE 2: The address of the S-CSCF may be obtained either from a previous request terminated by the AS, by querying the HSS on the Sh interface or from static configuration.

For the use of the P-Asserted-Identity by the AS, at least two cases exist:

- a) any initial request for a dialog or request for a standalone transaction is generated as if it was originated by the UE on whose behalf the request is generated. In this case the AS shall insert a P-Asserted-Identity representing a public user identity of that UE. The AS shall append the "orig" parameter to the URI of the S-CSCF; and
- b) any initial request for a dialog or request for a standalone transaction is generated by an AS supporting a service identified by a PSI. In this case the AS shall insert a P-Asserted-Identity containing the PSI of the AS.

Editor's Note: It needs to be specified that the AS can only add the P-Asserted-Identity when the AS is within the trust domain.

The AS can indicate privacy of the P-Asserted-Identity in accordance with RFC 3323 [33], and the additional requirements contained within RFC 3325 [34].

Where privacy is required, in any initial request for a dialog or request for a standalone transaction, the AS shall set the From header to "Anonymous".

NOTE 3: The contents of the From header should not be relied upon to be modified by the network based on any privacy specified by the user either within the AS indication of privacy or by network subscription or network policy. Therefore the AS should include the value "Anonymous" whenever privacy is explicitly required.

Editor's note: Is there a need to specify any conditions for the AS choosing to indicate privacy that are generic to all originating AS, or all conditions service specific, and therefore out of the scope of 24.229.

5.7.4 Application Server (AS) acting as a SIP proxy

When the AS acting as a SIP proxy receives a request from the S-CSCF, prior to forwarding the request it shall:

- remove its own URI from the topmost Route header; and
- after executing the required services, route the request based on the topmost Route header.

The AS may modify the SIP requests based on service logic, prior to forwarding the request back to the S-CSCF.

The AS shall not fork the request if the fork-directive in the Request-Disposition header is set to "no-fork" as described in RFC 3841 [56B].

An AS acting as a SIP proxy shall propagate any received IM CN subsystem XML message body in the forwarded message.

5.7.5 Application Server (AS) performing 3rd party call control

5.7.5.1 General

The AS performing 3rd party call control acts as a B2BUA. There are two kinds of 3rd party call control:

- Routeing B2BUA: an AS receives a request from S-CSCF, terminates it and generates a new request, which is based on the received request.
- Initiating B2BUA: an AS initiates two requests, which are logically connected together at the AS.

The B2BUA AS will internally map the message headers between the two dialogs that it manages. It is responsible for correlating the dialog identifiers and will decide when to simply translate a message from one dialog to the other, or when to perform other functions. These decisions are specific to each AS and are outside the scope of the present document.

The AS, although acting as a UA, does not initiate any registration of its associated addresses. These are assumed to be known by peer-to-peer arrangements within the IM CN subsystem.

5.7.5.2 Call initiation

5.7.5.2.1 Initial INVITE

When the AS acting as a Routeing B2BUA receives an initial INVITE request from the S-CSCF, the AS shall:

- remove its own SIP URI from the topmost Route header of the received INVITE request;
- perform the AS specific functions. See 3GPP TS 23.218 [5];
- if successful, generate and send a new INVITE request to the S-CSCF to establish a new dialog;
- copy the remaining Route header(s) unchanged from the received INVITE request to the new INVITE request;
- route the new INVITE request based on the topmost Route header.

NOTE: The topmost Route header of the received INVITE request will contain the AS's SIP URI. The following Route header will contain the SIP URI of the S-CSCF.

When the AS is acting as an Initiating B2BUA, the AS shall apply the procedures described in subclause 5.7.3 for both requests. The AS shall either set the icid parameter in the P-Charging-Vector header to be the same as received or different. The AS may retrieve CCF and/or ECF addresses from HSS on Sh interface.

5.7.5.2.2 Subsequent requests

Void.

5.7.5.3 Call release

5.7.5.4 Call-related requests

An AS may initiate a call release. See 3GPP TS 23.218 [5] for possible reasons. The AS shall simultaneously send the BYE request for both dialogs managed by the B2BUA.

5.7.5.5 Further initial requests

When the AS acting as an Initiating B2BUA the AS shall apply the procedures described in subclause 5.7.3 for both requests. The AS shall either set the icid parameter in the P-Charging-Vector header to be the same as received or different.

5.7.6 Void

5.8 Procedures at the MRFC

5.8.1 General

Although the MRFC is acting as a UA, it is outside the scope of this specification how the MRFC associated addresses are made known to other entities.

When the MRFC sends any request or response (excluding ACK requests and CANCEL requests and responses) related to a dialog or standalone transaction, the MRFC may insert previously saved values into P-Charging-Vector and P-Charging-Function-Addresses headers before sending the message.

5.8.2 Call initiation

5.8.2.1 Initial INVITE

5.8.2.1.1 MRFC-terminating case

5.8.2.1.1.1 Introduction

The MRFC shall provide a P-Asserted-Identity header in a response to the initial request for a dialog, or any response for a standalone transaction. It is a matter of network policy whether the MRFC expresses privacy according to RFC 3323 [33] with such responses.

When the MRFC receives an initial INVITE request, the MRFC shall store the values received in the P-Charging-Vector header, e.g. icid parameter. The MRFC shall store the values received in the P-Charging-Function-Addresses header.

5.8.2.1.1.2 Tones and announcements

The MRFC can receive INVITE requests to set up a session to play tones and announcements. The MRFC acts as terminating UA in this case.

When the MRFC receives an INVITE request with an indicator for a tone or announcement, the MRFC shall:

- send 100 (Trying) response.

NOTE: The detailed interfaces for requesting tones and announcements are not specified in this version of the document. Other solutions may be used in the interim.

5.8.2.1.1.3 Ad-hoc conferences

The MRFC can receive INVITE requests to set up an ad-hoc conferencing session (e.g. Multiparty Call) or to add parties from the conference. The MRFC acts as terminating UA in this case.

When the MRFC receives an INVITE request with an indicator to initiate ad hoc conferencing, the MRFC shall:

- send 100 (Trying) response; and
- after the MRFP indicates that the conference resources are available, send 200 (OK) response with an MRFC conference identifier. If the MRFC chooses to send a 183 (Session Progress) response prior to the 200 (OK), then the conference identifier may also be included in the 183 (Session Progress) response.

When the MRFC receives an INVITE request with an indicator to add a party to an existing ad hoc conference (i.e. MRFC conference identifier), the MRFC shall:

- send 100 Trying response; and

- after the MRFP indicates that the conferencing request is granted, send 200 OK response with the MRFC conference identifier. If the MRFC chooses to send a 183 Session Progress response prior to the 200 OK, then the conference identifier may also be included in the 183 Session Progress response.

NOTE: The detailed interface for requesting ad-hoc conferencing sessions is not specified in this version of the document. Other solutions may be used in the interim.

5.8.2.1.1.4 Transcoding

The MRFC may receive INVITE requests to set up transcoding between endpoints with incompatible codecs. The MRFC acts as terminating UA in this case.

When the MRFC receives an INVITE request with an indicator for transcoding and a codec is supplied in SDP, the MRFC shall:

- send 100 (Trying) response; and
- after the MRFP indicates that the transcoding request is granted, send 200 (OK) response.

When the MRFC receives an INVITE request with an indicator for transcoding but no SDP, the MRFC shall:

- send 183 (Session Progress) response with list of codecs supported by the MRFC/MRFP.

5.8.2.1.2 MRFC-originating case

The MRFC shall provide a P-Asserted-Identity header in an initial request for a dialog, or any request for a standalone transaction. It is a matter of network policy whether the MRFC expresses privacy according to RFC 3323 [33] with such requests.

When an MRFC generates an initial request for a dialog or a request for a standalone transaction, the MRFC shall insert a P-Charging-Vector header with the icid parameter populated as specified in 3GPP TS 32.260 [17].

5.8.2.2 Subsequent requests

5.8.2.2.1 Tones and announcements

When the MRFC receives an ACK request for a session, this may be considered as an event to direct the MRFP to start the playing of a tone or announcement.

5.8.3 Call release

5.8.3.1 S-CSCF-initiated call release

5.8.3.1.1 Tones and announcements

When the MRFC receives a BYE request for a session, the MRFC directs the MRFP to stop the playing of a tone or announcement.

5.8.3.2 MRFC-initiated call release

5.8.3.2.1 Tones and announcements

When the MRFC has a timed session to play tones and announcements and the time expires, the MRFC shall:

- send a BYE request towards the UE.

When the MRFC is informed by the MRFP that tone or announcement resource has been released, the MRFC shall:

- send a BYE request towards the UE.

5.8.2.2.2 Transcoding

When the MRFC receives a PRACK request (in response to the 183 (Session Progress) response) with an indicator for transcoding and codec supplied in SDP, the MRFC shall:

- after the MRFP indicates that the transcoding request is granted, send 200 (OK) response.

5.8.4 Call-related requests

5.8.4.1 ReINVITE

5.8.4.1.1 MRFC-terminating case

5.8.4.1.1.1 Ad-hoc conferences

The MRFC can receive reINVITE requests to modify an ad-hoc conferencing session (e.g. Multiparty Call) for purposes of floor control and for parties to leave and rejoin the conference.

When the MRFC receives a reINVITE request, the MRFC shall:

- send 100 (Trying) response; and
- after the MRFP indicates that the conferencing request is granted, send 200 (OK) response with the MRFC conference identifier. If the MRFC chooses to send a 183 (Session Progress) response prior to the 200 OK, then the conference identifier may also be included in the 183 (Session Progress) response.

NOTE: The detailed interface for requesting ad-hoc conferencing sessions is not specified in this version of the document. Other solutions may be used in the interim.

5.8.4.1.2 MRFC-originating case

Void.

5.8.4.2 REFER

5.8.4.2.1 MRFC-terminating case

Void.

5.8.4.2.2 MRFC-originating case

Void.

5.8.4.2.3 REFER initiating a new session

Void.

5.8.4.2.4 REFER replacing an existing session

Void.

5.8.4.3 INFO

Void.

5.8.5 Further initial requests

When the MRFC responds to an OPTIONS request with a 200 (OK) response, the MRFC may include a message body with an indication of the supported tones/announcement packages, DTMF capabilities, supported codecs and conferencing options of the MRFC/MRFP.

NOTE: The detailed interface for requesting MRFC/MRFP capabilities is not specified in this version of the document. Other solutions may be used in the interim.

5.9 IMS-ALG

5.9.1 General

The IMS-ALG acts as a B2BUA. The IMS-ALG will internally map the message headers between the two dialogs that it manages. It is responsible for correlating the dialog identifiers and will decide when to simply translate a message from one dialog to the other, or when to perform other functions. The IMS-ALG, although acting as a UA, does not initiate any registration of its associated addresses. These are assumed to be known by peer-to-peer arrangements within the IM CN subsystem. The use of the Path and Service-Route headers shall not be supported by the IMS-ALG.

When the IMS-ALG receives an initial INVITE request from a SIP network that does not support the IP address type used in the IM CN subsystem, the IMS-ALG shall generate a new initial INVITE request and forward it to the I-CSCF.

The internal function of the IMS-ALG is defined in 3GPP TS 29.162 [11A].

6 Application usage of SDP

6.1 Procedures at the UE

Usage of SDP by the UE:

1. In order to authorize the media streams, the P-CSCF and S-CSCF have to be able to inspect the SDP payloads. Hence, the UE shall not encrypt the SDP payloads.
2. An INVITE request generated by a UE shall contain SDP payload. The SDP payload shall reflect the calling user's terminal capabilities and user preferences for the session. The UE shall order the SDP payload with the most preferred codec listed first.
3. If the SIP request includes a "precondition" option-tag in the Require header, the calling user shall indicate the desired QoS for the session, using the segmented status type. In an initial INVITE request the UE shall indicate that it mandates local QoS and that this precondition is not yet satisfied, i.e. the UE shall include the following preconditions:

a=des: qos mandatory local sendrecv

a=curr: qos local none

If the SIP request does not include the "precondition" option-tag in the Require header, the UE shall not indicate that it mandates local QoS. The UE may indicate its desire for optional local QoS, by including the following preconditions:

a=des:qos optional local sendrecv

In the case described in subclause 5.1.3.1.2.2 in the first SDP offer the UE sends, the UE shall set each media stream in inactive mode by including an "a=inactive" line, according to the procedures described in draft-ietf-mmusic-sdp-new [39].

NOTE 1: When setting the media streams in the inactive mode, the UE may include in the first SDP offer the proper values for the RS and RR modifiers and associate bandwidths to prevent the receiving of the RTCP packets, and not send any RTCP packets.

4. Providing that the INVITE request received by the UE contains an SDP offer including one or more "m=" media descriptions, and the precondition mechanism is used as described in subclause 5.1.4.1.2.1, the first 183 (Session Progress) provisional response that the UE sends, shall contain the answer for the SDP received in the INVITE. The said SDP answer shall reflect the called user's terminal capabilities and user preferences.

In the case described in subclause 5.1.4.1.3 no specific SDP procedures for integration of resource reservation have to be performed.

In the case described in subclause 5.1.4.1.2.3 in the first SDP answer the UE sends, the UE shall set each media streams in inactive mode by including an "a=inactive" line, according to the procedures described in draft-ietf-mmusic-sdp-new [39].

If the UE is setting one or more media streams in active mode, it shall apply the procedures described in draft-ietf-mmusic-sdp-new [39] with respect to setting the direction of media streams.

5. When the UE sends a 183 (Session Progress) response with SDP payload including one or more "m=" media descriptions, if the preconditions extension as described in RFC 3312 [30] is supported by the calling UE, the called UE shall request confirmation for the result of the resource reservation at the originating end point.
6. During session establishment procedure, SIP messages shall only contain SDP payload if that is intended to modify the session description, or when the SDP payload must be included in the message because of SIP rules described in RFC 3261[26].
7. For "video" and "audio" media types that utilize the RTP/RTCP, the UE shall specify the proposed bandwidth for each media stream utilizing the "b=" media descriptor and the "AS" bandwidth modifier in the SDP.

If the media line in the SDP indicates the usage of RTP/RTCP, in addition to the "AS" bandwidth modifier in the media-level "b=" line, the UE shall include two media-level "b=" lines, one with the "RS" bandwidth modifier and the other with the "RR" bandwidth modifier as described in RFC 3556 [56] to specify the required bandwidth allocation for RTCP.

For other media streams the "b=" media descriptor may be included. The value or absence of the "b=" parameter will affect the assigned QoS which is defined in 3GPP TS 29.208 [13].

NOTE 2: In a two-party session where both participants are active, the RTCP receiver reports are not sent, therefore, the RR bandwidth modifier will typically get the value of zero.

8. The UE shall include the MIME subtype "telephone-event" in the "m=" media descriptor in the SDP for audio media flows that support both audio codec and DTMF payloads in RTP packets as described in RFC 2833 [23].
9. The UE shall inspect the SDP contained in any SIP request or response, looking for possible indications of grouping of media streams according to RFC 3524 [54] and perform the appropriate actions for IP-CAN bearer establishment for media according to IP-CAN specific procedures (see subclause B.2.2.5 for IP-CAN implemented using GPRS).
10. If an IP-CAN bearer is rejected or modified, the UE shall, if the SDP is affected, update the remote SIP entity according to RFC 3261 [26] and RFC 3311 [29].
11. If the UE builds SDP for an INVITE request generated after receiving a 488 (Not Acceptable Here) response, as described in subclause 5.1.3.1, the UE shall include SDP payload containing a subset of the allowed media types, codecs and other parameters from the SDP payload of all 488 (Not Acceptable Here) responses related to the same session establishment attempt (i.e. a set of INVITE requests used for the same session establishment). The UE shall order the codecs in the SDP payload according to the order of the codecs in the SDP payload of the 488 (Not Acceptable Here) response.

NOTE 3: The UE may be attempting a session establishment through multiple networks with different policies and potentially may need to send multiple INVITE requests and receive multiple 488 (Not Acceptable Here) responses from different CSCF nodes. The UE therefore takes into account the SDP contents of all the 488 (Not Acceptable Here) responses received related to the same session establishment when building a new INVITE request.

6.2 Procedures at the P-CSCF

When the P-CSCF receives any SIP request containing an SDP offer, the P-CSCF shall examine the media parameters in the received SDP. If the P-CSCF finds any media parameters which are not allowed on the network by local policy, the P-CSCF shall return a 488 (Not Acceptable Here) response containing SDP payload. This SDP payload contains either all the media types, codecs and other SDP parameters which are allowed according to the local policy, or, based on configuration by the operator of the P-CSCF, a subset of these allowed parameters. This subset may depend on the content of the received SIP request. The P-CSCF shall build the SDP payload in the 488 (Not Acceptable Here) response in the same manner as a UAS builds the SDP in a 488 (Not Acceptable Here) response as specified in RFC 3261 [26]. The P-CSCF shall order the SDP payload with the most preferred codec listed first. If the SDP offer is encrypted, the P-CSCF may reject the request.

When the P-CSCF receives a SIP response different from 200 (OK) response containing SDP offer, the P-CSCF shall not examine the media parameters in the received SDP offer, but the P-CSCF shall rather check the succeeding request containing the SDP answer for this offer, and if necessary (i.e. the SDP answer reduced by the UE still breaches local policy), the P-CSCF shall return a 488 (Not Acceptable Here) response containing the local policy allowed SDP payload. If the SDP answer is encrypted, the P-CSCF may reject the succeeding request.

When the P-CSCF receives a 200 (OK) response containing SDP offer, the P-CSCF shall examine the media parameters in the received SDP. If the P-CSCF finds any media parameters which are not allowed on the network by local policy, the P-CSCF shall forward the SDP offer and on the receipt of the ACK request containing the SDP answer, it shall immediately terminate the session as described in subclause 5.2.8.1.2. If the SDP offer is encrypted, the P-CSCF shall forward the 200 (OK) and on the receipt of the ACK request containing the SDP answer, it may immediately terminate the session as described in subclause 5.2.8.1.2.

When the P-CSCF receives an initial INVITE request for a terminating session setup or a 183 (Session Progress) response to an INVITE request for an originating session setup, the P-CSCF may modify the SDP according to RFC 3524 [54] to indicate to the UE that particular media stream(s) is grouped according to a local policy. The policy is used to determine whether the P-CSCF will request the UE to keep media stream(s) grouped in different IP-CAN bearers and identify the relation between different media streams and IP-CAN bearers (see subclause B.2.2.5 for IP-CAN implemented using GPRS).

The P-CSCF shall apply and maintain the same policy within the SDP from the initial request or response containing SDP and throughout the complete SIP session. If a media stream is added and grouping apply to the session, the P-CSCF shall modify the SDP according to RFC 3524 [54] to indicate to the UE that the added media stream(s) will be grouped into either a new group or into one of the existing groups. The P-CSCF shall not indicate re-grouping of media stream(s) within the SDP.

The P-CSCF shall not apply RFC 3524 [54] to the SDP for additional media stream(s), if grouping of media stream(s) was not indicated in the initial INVITE request or 183 (Session Progress) response.

The P-CSCF may inspect, if present, the "b=RS" and "b=RR" lines in order to find out the bandwidth allocation requirements for RTP.

6.3 Procedures at the S-CSCF

When the S-CSCF receives any SIP request containing an SDP offer, the S-CSCF shall examine the media parameters in the received SDP. If the S-CSCF finds any media parameters which are not allowed based on either local policy or the subscription, the S-CSCF shall return a 488 (Not Acceptable Here) response containing SDP payload. This SDP payload contains either all the media types, codecs and other SDP parameters which are allowed according to the local policy and users subscription or, based on configuration by the operator of the S-CSCF, a subset of these allowed parameters. This subset may depend on the content of the received SIP request. The S-CSCF shall build the SDP payload in the 488 (Not Acceptable Here) response in the same manner as a UAS builds the SDP in a 488 (Not Acceptable Here) response as specified in RFC 3261 [26]. If the SDP offer is encrypted, the S-CSCF may reject the request.

When the S-CSCF receives a SIP response different from 200 (OK) response containing SDP offer, the S-CSCF shall not examine the media parameters in the received SDP offer, but the S-CSCF shall rather check the succeeding request containing the SDP answer for this offer, and if necessary (i.e. the SDP answer reduced by the UE still breaches local policy), the S-CSCF shall return a 488 (Not Acceptable Here) response containing the local policy allowed SDP payload. If the SDP answer is encrypted, the S-CSCF may reject the succeeding request.

When the S-CSCF receives a 200 (OK) response containing SDP offer, the S-CSCF shall examine the media parameters in the received SDP. If the S-CSCF finds any media parameters which are not allowed based on either local policy or the subscription, the S-CSCF shall forward the SDP offer and on the receipt of the ACK request containing the SDP answer, it shall immediately terminate the session as described in subclause 5.4.5.1.2. If the SDP offer is encrypted, the S-CSCF shall forward the 200 (OK) and on the receipt of the ACK request containing the SDP answer, it may immediately terminate the session as described in subclause 5.2.8.1.2.

6.4 Procedures at the MGCF

6.4.1 Calls originating from circuit-switched networks

The usage of SDP by the MGCF is the same as its usage by the UE, as defined in the subclause 6.1 and A.3.2, with the following exception:

- In an INVITE request generated by a MGCF, the MGCF shall indicate the current status of the precondition.

When sending an SDP, the MGCF shall not include the "i=", "u=", "e=", "p=", "r=", and "z=" descriptors in the SDP, and it shall ignore them when received in the SDP.

When the MGCF generates and sends an INVITE request for a call originating in a circuit-switched network, the MGCF shall:

- populate the SDP with the codecs supported by the associated MGW (see 3GPP TS 26.235 [10] for the supported codecs); and
- in order to support DTMF, populate the SDP with MIME subtype "telephone-event" as described in RFC 2833 [23].

When the MGCF receives 183 (Session Progress) response to an INVITE request, the MGCF shall:

- check that a supported codec has been indicated in the SDP.

6.4.2 Calls terminating in circuit-switched networks

The usage of SDP by the MGCF is the same as its usage by the UE, as defined in the subclause 6.1 and A.3.2, with the following exception:

- When the MGCF sends a 183 (Session Progress) response with SDP payload, it shall only request confirmation for the result of the resource reservation at the originating end point if there are any remaining unfulfilled preconditions.

When sending an SDP, the MGCF shall not include the "i=", "u=", "e=", "p=", "r=", and "z=" descriptors in the SDP, and it shall ignore them when received in the SDP.

When the MGCF receives an initial INVITE request, the MGCF shall:

- check for a codec that matches the requested SDP, which may include the MIME subtype "telephone-event" as described in RFC 2833 [23].

When the MGCF generates and sends a 183 (Session Progress) response to an initial INVITE request, the MGCF shall:

- set SDP indicating the selected codec, which may include the MIME subtype "telephone-event" as described in RFC 2833 [23].

6.5 Procedures at the MRFC

Void.

6.6 Procedures at the AS

Since an AS may provide a wide range of different services, procedures for the SDP usage for an AS acting as originating UA, terminating UA or third-party call control role are dependent on the service provided to the UA and on the capabilities on the remote UA. There is no special requirements regarding the usage of the SDP, except the requirements for the SDP capabilities described in the following paragraphs and clause A.3:

- 1) Providing that an INVITE request generated by an AS contains SDP payload, the AS has the capability of reflecting the originating AS's capabilities, desired QoS and precondition requirements for the session in the SDP payload.
- 2) When the AS sends a 183 (Session Progress) response with SDP payload including one or more "m=" media types, it has the capability of requesting confirmation for the result of the resource reservation at the originating endpoint.

6.7 Procedures at the IMS-ALG

IMS-ALG makes procedures as for an originating UA and terminating UA. The IMS-ALG acts as a B2BUA. The treatment of the SDP information between originating UA and terminating UA is described in 3GPP TS 29.162 [11A].

7 Extensions within the present document

7.1 SIP methods defined within the present document

There are no SIP methods defined within the present document over and above those defined in the referenced IETF specifications.

7.2 SIP headers defined within the present document

7.2.0 General

There are no SIP headers defined within the present document over and above those defined in the referenced IETF specifications.

7.2.1 Void

7.2.2 Void

7.2.3 Void

7.2.4 Void

7.2.5 Void

7.2.6 Void

7.2.7 Void

7.2.8 Void

7.2.9 Void

7.2.10 Void

7.2A Extensions to SIP headers defined within the present document

7.2A.1 Extension to WWW-authenticate header

7.2A.1.1 Introduction

This extension defines a new authentication parameter (auth-param) for the WWW-Authenticate header used in a 401 (Unauthorized) response to the REGISTER request. For more information, see RFC 2617 [21] subclause 3.2.1.

7.2A.1.2 Syntax

The syntax for for auth-param is specified in table 7.4.

Table 7.4: Syntax of auth-param

auth-param	= 1#(integrity-key / cipher-key)
integrity-key	= "ik" EQUAL ik-value
cipher-key	= "ck" EQUAL ck-value
ik-value	= LDQUOT *(HEXDIG) RDQUOT
ck-value	= LDQUOT *(HEXDIG) RDQUOT

7.2A.1.3 Operation

This authentication parameter will be used in a 401 (Unauthorized) response in the WWW-authenticate header during UE authentication procedure as specified in subclause 5.4.1.

The S-CSCF appends the integrity-key parameter (directive) to the WWW.-Authenticate header in a 401 (Unauthorized) response. The P-CSCF stores the integrity-key value and removes the integrity-key parameter from the header prior to forwarding the response to the UE.

The S-CSCF appends the cipher-key parameter (directive) to the WWW-Authenticate header in a 401 (Unauthorized) response. The P-CSCF removes the cipher-key parameter from the header prior to forwarding the response to the UE. In the case ciphering is used, the P-CSCF stores the cipher-key value.

7.2A.2 Extension to Authorization header

7.2A.2.1 Introduction

The integrity-protected authentication parameter (auth-param) is an extension parameter defined for the Authorization header used in REGISTER requests. For more information, see RFC 2617 [21] subclause 3.2.2.

7.2A.2.2 Syntax

The syntax for for auth-param is specified in table 7.5.

Table 7.5: Syntax of auth-param

```
integrity-protected = "integrity-protected" EQUAL ("yes" / "no")
```

7.2A.2.3 Operation

This authentication parameter is inserted by the P-CSCF in all the REGISTER requests received from the UE. The value of the "integrity protected" field in the auth-param parameter is set as specified in subclause 5.2.2. This information is used by S-CSCF to decide whether to challenge the REGISTER request or not, as specified in subclause 5.4.1.

7.2A.3 Tokenized-by parameter definition (various headers)

7.2A.3.1 Introduction

The tokenized-by parameter is an extension parameter appended to encrypted entries in various SIP headers as defined in subclause 5.3.3.1.

7.2A.3.2 Syntax

The syntax for the tokenized-by parameter is specified in table 7.6:

Table 7.6: Syntax of tokenized-by-param

```
uri-parameter = transport-param / user-param / method-param  
/ ttl-param / maddr-param / lr-param / tokenized-by-param / other-param  
tokenized-by-param = "tokenized-by" EQUAL hostname
```

The BNF for uri-parameter is taken from IETF RFC 3261 [26] and modified accordingly.

7.2A.3.3 Operation

The tokenized-by parameter is appended by I-CSCF(THIG) after all encrypted strings within SIP headers when network configuration hiding is active. The value of the parameter is the domain name of the network which encrypts the information.

7.2A.4 Void

7.2A.5 P-Charging-Vector header

7.2A.5.1 Introduction

The P-Charging-Vector header field is extended to include specific charging correlation information needed for IM CN subsystem functional entities.

7.2A.5.2 Syntax

The syntax of the P-Charging-Vector header field is described in RFC 3455 [52]. There may be additional coding rules for this header depending on the type of IP-CAN, according to access technology specific descriptions.

7.2A.5.3 Operation

The operation of this header is described in subclauses 5.2, 5.3, 5.4, 5.5, 5.6, 5.7 and 5.8.

7.2A.6 Orig parameter definition

Editor's note: According to draft-ietf-sip-uri-parameter-reg-01, all SIP and SIPS URI parameters MUST be documented in an RFC in order to be registered by IANA. Registered SIP or SIPS URI parameters are to be considered "reserved words". 3GPP shall consider to describe this parameter in an informational RFC and register it by IANA. When that happens, section 7.2A.6 will be removed.

7.2A.6.1 Introduction

The "orig" parameter is a uri-parameter intended to tell to the S-CSCF that it has to perform the originating services instead of terminating services.

7.2A.6.2 Syntax

The syntax for the orig parameter is specified in table 7.7:

Table 7.7: Syntax of orig parameter

```
uri-parameter = transport-param / user-param / method-param / ttl-param / maddr-param / lr-param /  
               orig / other-param  
orig = "orig"
```

The BNF for uri-parameter is taken from IETF RFC 3261 [26] and modified accordingly.

7.2A.6.3 Operation

The orig parameter is appended to the address of the S-CSCF by the ASs, when those initiate requests on behalf of the user. The S-CSCF will run originating services whenever the orig parameter is present next to its address.

7.3 Option-tags defined within the present document

There are no option-tags defined within the present document over and above those defined in the referenced IETF specifications.

7.4 Status-codes defined within the present document

There are no status-codes defined within the present document over and above those defined in the referenced IETF specifications.

7.5 Session description types defined within the present document

There are no session description types defined within the present document over and above those defined in the referenced IETF specifications.

7.6 3GPP IM CN subsystem XML body, version 1

7.6.1 General

This subclause describes the Document Type Definition that is applicable for the 3GPP IM CN Subsystem XML body.

Any SIP User Agent or proxy may insert or remove the 3GPP IM CN subsystem XML body or parts of it, as required, in any SIP message. The 3GPP IM CN subsystem XML body shall not be forwarded outside a 3GPP network.

The associated MIME type with the 3GPP IMS XML body is "application/3gpp-ims+xml".

7.6.2 Document Type Definition

The Document Type Definition, according to XML syntax definitions, is defined in table 7.7.

Table 7.7: IM CN subsystem XML body, version 1 DTD

```
<?xml version="1.0" ?>
<!-- Draft DTD for the IMS XML body. -->

<!DOCTYPE ims-3gpp [
  <!-- ims-3gpp element: root element -->

  <!ELEMENT ims-3gpp (
    alternative-service?, service-info?)>
  <!ATTLIST ims-3gpp version CDATA #REQUIRED>

  <!-- service-info element: The transparent data received from HSS for AS -->
  <!ELEMENT service-info          (#CDATA)>

  <!-- alternative-service: alternative-service used in emergency sessions -->
  <!ELEMENT alternative-service   (type, reason)>
  <!ELEMENT type                  (emergency)>
  <!ELEMENT reason                (#PCDATA)>

]>
```

7.6.3 DTD description

This subclause describes the elements of the IMS Document Type Definition as defined in table 7.7.

<ims-3gpp>: This is the root element of the IMS XML body. It shall always be present. The version described in the present document is 1.

<service-info>: the transparent element received from the HSS for a particular trigger point are placed within this optional element.

<alternative-service>: in the present document, the alternative service is used as a response for an attempt to establish an emergency session within the IM CN subsystem. The element describes an alternative service where the call should success. The alternative service is described by the type of service information. A possible reason cause why an alternative service is suggested may be included.

The <alternative-service> element contains a <type> element that indicates the type of alternative service. In the present document, the <type> element contains only the value "emergency".

The <reason> element contains an explanatory text with the reason why the session setup has been redirected. A UE may use this information to give an indication to the user.

7.7 SIP timers

The timers defined in RFC 3261 [26] need modification in some cases to accommodate the delays introduced by the air interface processing and transmission delays. Table 7.8 shows recommended values for IM CN subsystem.

Table 7.8 lists in the first column, titled "SIP Timer" the timer names as defined in RFC 3261 [26].

The second column, titled "value to be applied between IM CN subsystem elements" lists the values recommended for network elements e.g. P-CSCF, S-CSCF, MGCF, when communicating with each other i.e. when no air interface leg is included. These values are identical to those recommended by RFC 3261 [26].

The third column, titled "value to be applied at the UE" lists the values recommended for the UE. These are modified when compared to RFC 3261 [26] to accommodate the air interface delays.

The fourth column, titled "value to be applied at the P-CSCF toward a UE" lists the values recommended for the P-CSCF when an air interface leg is traversed. These are modified when compared to RFC 3261 [26].

The final column reflects the timer meaning as defined in RFC 3261 [26].

Table 7.8: SIP timers

SIP Timer	Value to be applied between IM CN subsystem elements	Value to be applied at the UE	Value to be applied at the P-CSCF toward a UE	Meaning
T1	500ms default	2s default	2s default	RTT estimate
T2	4s	16s	16s	The maximum retransmit interval for non-INVITE requests and INVITE responses
T4	5s	17s	17s	Maximum duration a message will remain in the network
Timer A	initially T1	initially T1	initially T1	INVITE request retransmit interval, for UDP only
Timer B	64*T1	64*T1	64*T1	INVITE transaction timeout timer
Timer C	> 3min	> 3 min	> 3 min	proxy INVITE transaction timeout
Timer D	> 32s for UDP 0s for TCP/SCTP	>128s 0s for TCP/SCTP	>128s 0s for TCP/SCTP	Wait time for response retransmits
Timer E	initially T1	initially T1	initially T1	non-INVITE request retransmit interval, UDP only
Timer F	64*T1	64*T1	64*T1	non-INVITE transaction timeout timer
Timer G	initially T1	initially T1	initially T1	INVITE response retransmit interval
Timer H	64*T1	64*T1	64*T1	Wait time for ACK receipt.
Timer I	T4 for UDP 0s for TCP/SCTP	T4 for UDP 0s for TCP/SCTP	T4 for UDP 0s for TCP/SCTP	Wait time for ACK retransmits
Timer J	64*T1 for UDP 0s for TCP/SCTP	64*T1 for UDP 0s for TCP/SCTP	64*T1 for UDP 0s for TCP/SCTP	Wait time for non-INVITE request retransmits
Timer K	T4 for UDP 0s for TCP/SCTP	T4 for UDP 0s for TCP/SCTP	T4 for UDP 0s for TCP/SCTP	Wait time for response retransmits

7.8 IM CN subsystem timers

Table 7.9 shows recommended values for timers specific to the IM CN subsystem.

Table 7.9: IM CN subsystem

Timer	Value to be applied at the UE	Value to be applied at the P-CSCF	Value to be applied at the S-CSCF	Meaning
reg-await-auth	not applicable	4 minutes	4 minutes	The timer is used by the S-CSCF during the authentication procedure of the UE. For detailed usage of the timer see subclause 5.4.1.2. The timer is also used by the P-CSCF to set the SIP level lifetime of the temporary set of security associations. For detailed usage of the timer see subclause 5.1.1.5. The authentication procedure may take in the worst case as long as 2 times Timer F. The IM CN subsystem value for Timer F is 128 seconds.

8 SIP compression

8.1 SIP compression procedures at the UE

8.1.1 SIP compression

The UE shall support SigComp as specified in RFC 3320 [32]. When using SigComp the UE shall send compressed SIP messages in accordance with RFC 3486 [55]. When the UE will create the compartment is implementation specific, but the compartment shall not be created until a set of security associations are set up. The compartment shall finish when the UE is deregistered. State creations and announcements shall be allowed only for messages received in a security association.

NOTE: Exchange of bytecodes during registration will prevent unnecessary delays during session setup.

Editor's note: The draft-ietf-rohc-sigcomp-sip-01 [79] can lead to the need for additional changes or clarifications.

The UE shall support the SIP dictionary specified in RFC 3485 [42]. If compression is enabled, the UE shall use the dictionary to compress the first message.

The following apply when signalling compression is used:

- State Memory Size (SMS) greater than zero is needed to give room for the UDVM byte code and make dynamic compression possible. A State Memory Size of at least 4096 bytes shall be a minimum value; and
- A Decompression Memory Size (DMS) of at least 8192 bytes should be a minimum value.

8.1.2 Compression of SIP requests and responses transmitted to the P-CSCF

The UE should compress the requests and responses transmitted to the P-CSCF according to subclause 8.1.1.

NOTE 1: Compression of SIP messages is an implementation option. However, compression is strongly recommended.

NOTE 2: Since compression support is mandatory, the UE may send even the first message compressed. Sigcomp provides mechanisms to allow the UE to know if state has been created in the P-CSCF or not.

8.1.3 Decompression of SIP requests and responses received from the P-CSCF

The UE shall decompress the compressed requests and responses received from the P-CSCF according to subclause 8.1.1.

If the UE detects a decompression failure at the P-CSCF, the recovery mechanism is implementation specific and this may, as an example, include resetting the compartment or changing the algorithm.

8.2 SIP compression procedures at the P-CSCF

8.2.1 SIP compression

The P-CSCF shall support SigComp as specified in RFC 3320 [32]. When using SigComp the P-CSCF shall send compressed SIP messages in accordance with RFC 3486 [55]. When the P-CSCF will create the compartment is implementation specific, but the compartment shall not be created until a set of security associations are set up. The compartment shall finish when the UE is deregistered. State creations and announcements shall be allowed only for messages received in a security association.

The P-CSCF shall support the SIP dictionary specified in RFC 3485 [42]. If compression is enabled, the P-CSCF shall use the dictionary to compress the first message.

NOTE: Exchange of bytecodes during registration will prevent unnecessary delays during session setup.

Editor's note: The draft-ietf-rohc-sigcomp-sip-01 [79] can lead to the need for additional changes or clarifications.

The following apply when signalling compression is used:

- State Memory Size (SMS) greater than zero is needed to give room for the UDVM byte code and make dynamic compression possible. A State Memory Size of at least 4096 bytes shall be a minimum value; and
- A Decompression Memory Size (DMS) of at least 8192 bytes should be a minimum value.

8.2.2 Compression of SIP requests and responses transmitted to the UE

The P-CSCF should compress the requests and responses transmitted to the UE according to subclause 8.2.1.

NOTE: Compression of SIP messages is an implementation option. However, compression is strongly recommended.

8.2.3 Decompression of SIP requests and responses received from the UE

The P-CSCF shall decompress the compressed requests and responses received from the UE according to subclause 8.2.1.

If the P-CSCF detects a decompression failure at the UE, the recovery mechanism is implementation specific and this may, as an example, include resetting the compartment or changing the algorithm.

9 IP-Connectivity Access Network aspects when connected to the IM CN subsystem

9.1 Introduction

A UE accessing the IM CN subsystem utilises the services supported by the IP-CAN to provide packet-mode communication between the UE and the IM CN subsystem. General requirements for the UE on the use of these packet-mode services are specified in this clause.

Possible aspects particular to each IP-CAN is described separately for each IP-CAN.

9.2 Procedures at the UE

9.2.1 Connecting to the IP-CAN and P-CSCF discovery

Prior to communication with the IM CN subsystem, the UE shall:

- a) establish a connection with the IP-CAN;
- b) obtain an IP address using either the standard IETF protocols (e.g., DHCP or IPCP) or a protocol that is particular to the IP-CAN technology that the UE is utilising. The obtained IP address shall be fixed throughout the period the UE is connected to the IM CN subsystem, i.e. from the initial registration and at least until the last deregistration; and
- c) acquire a P-CSCF address(es).

The methods for acquiring a P-CSCF address(es) are:

- I. Employ Dynamic Host Configuration Protocol for IPv6 (DHCPv6) RFC 3315 [40] and the DHCPv6 options for SIP servers RFC 3319 [41].

The UE shall either:

- in the DHCP query, request a list of SIP server domain names of P-CSCF(s) and the list of Domain Name Servers (DNS); or
- request a list of SIP server IPv6 addresses of P-CSCF(s).

- II. Obtain the P-CSCF address(es) by employing a procedure that the IP-CAN technology supports. (e.g. GPRS).

When acquiring a P-CSCF address(es) the UE can freely select either method I or II.

The UE may also request a DNS Server IPv6 address(es) as specified in RFC 3315 [40].

9.2.2 Handling of the IP-CAN

The UE shall ensure that appropriate resources are available for the media flow(s) on the IP-CAN(s) related to a SIP-session. The means to ensure this is dependant on the characteristics for each IP-CAN, and is described separately for each IP-CAN in question.

GPRS is described in annex B.

9.2.3 Special requirements applying to forked responses

Since the UE does not know that forking has occurred until a second provisional response arrives, the UE will request the radio/bearer resources as required by the first provisional response. For each subsequent provisional response that may be received, different alternative actions may be performed depending on the requirements in the SDP answer:

- the UE has sufficient radio/bearer resources to handle the media specified in the SDP of the subsequent provisional response, or
- the UE must request additional radio/bearer resources to accommodate the media specified in the SDP of the subsequent provisional response.

NOTE 1: When several forked responses are received, the resources requested by the UE is the “logical OR” of the resources indicated in the multiple responses to avoid allocation of unnecessary resources. The UE does not request more resources than proposed in the original INVITE request.

NOTE 2: When service-based local policy is applied, the UE receives the same authorization token for all forked requests/responses related to the same SIP session.

When a first final 200 (OK) response for the INVITE request is received for one of the early dialogues, the UE proceeds to set up the SIP session using the radio/bearer resources required for this session. Upon the reception of a first final 200 (OK) response for the INVITE request, the UE shall release all unneeded radio/bearer resources.

Annex A (normative): Profiles of IETF RFCs for 3GPP usage

A.1 Profiles

A.1.1 Relationship to other specifications

This annex contains a profile to the IETF specifications which are referenced by this specification, and the PICS proformas underlying profiles do not add requirements to the specifications they are proformas for.

This annex provides a profile specification according to both the current IETF specifications for SIP, SDP and other protocols (as indicated by the "RFC status" column in the tables in this annex) which are referenced by this specification and to the 3GPP specifications using SIP (as indicated by the "Profile status" column in the tables in this annex).

In the "RFC status" column the contents of the referenced specification takes precedence over the contents of the entry in the column.

In the "Profile status" column, there are a number of differences from the "RFC status" column. Where these differences occur, these differences take precedence over any requirements of the IETF specifications. Where specification concerning these requirements exists in the main body of the present document, the main body of the present document takes precedence.

Where differences occur in the "Profile status" column, the "Profile status" normally gives more strength to a "RFC status" and is not be in contradiction with the "RFC status", e.g. it may change an optional "RFC status" to a mandatory "Profile status". If the "Profile status" weakens the strength of a "RFC status" then additionally this will be indicated by further textual description in the present document.

For all IETF specifications that are not referenced by this document or that are not mentioned within the 3GPP profile of SIP and SDP, the generic rules as defined by RFC 3261 [26] and in addition the rules in clauses 5 and 6 of this specification apply, e.g..

- a proxy which is built in accordance to this specification passes on any unknown method, unknown header field or unknown header parameter after applying procedures such as filtering, insertion of P-Asserted-Identity header, etc.;
- an UA which is built in accordance to this specification will
 - handle received unknown methods in accordance to the procedures defined in RFC 3261 [26], e.g. respond with a 400 (Bad Request) response; and
 - handle unknown header fields and unknown header parameters in accordance to the procedures defined in RFC 3261 [26], e.g. respond with a 420 (Bad Extension) if an extension identified by an option tag in the Require header of the received request is not supported by the UA.

A.1.2 Introduction to methodology within this profile

This subclause does not reflect dynamic conformance requirements but static ones. In particular, an condition for support of a PDU parameter does not reflect requirements about the syntax of the PDU (i.e. the presence of a parameter) but the capability of the implementation to support the parameter.

In the sending direction, the support of a parameter means that the implementation is able to send this parameter (but it does not mean that the implementation always sends it).

In the receiving direction, it means that the implementation supports the whole semantic of the parameter that is described in the main part of this specification.

As a consequence, PDU parameter tables in this subclause are not the same as the tables describing the syntax of a PDU in the reference specification, e.g. RFC 3261 [26] tables 2 and 3. It is not rare to see a parameter which is optional in the syntax but mandatory in subclause below.

The various statii used in this subclause are in accordance with the rules in table A.1.

Table A.1: Key to status codes

Status code	Status name	Meaning
m	mandatory	the capability shall be supported. It is a static view of the fact that the conformance requirements related to the capability in the reference specification are mandatory requirements. This does not mean that a given behaviour shall always be observed (this would be a dynamic view), but that it shall be observed when the implementation is placed in conditions where the conformance requirements from the reference specification compel it to do so. For instance, if the support for a parameter in a sent PDU is mandatory, it does not mean that it shall always be present, but that it shall be present according to the description of the behaviour in the reference specification (dynamic conformance requirement).
o	optional	the capability may or may not be supported. It is an implementation choice.
n/a	not applicable	it is impossible to use the capability. No answer in the support column is required.
x	prohibited (excluded)	It is not allowed to use the capability. This is more common for a profile.
c <integer>	conditional	the requirement on the capability ("m", "o", "n/a" or "x") depends on the support of other optional or conditional items. <integer> is the identifier of the conditional expression.
o.<integer>	qualified optional	for mutually exclusive or selectable options from a set. <integer> is the identifier of the group of options, and the logic of selection of the options.
i	irrelevant	capability outside the scope of the given specification. Normally, this notation should be used in a base specification ICS proforma only for transparent parameters in received PDUs. However, it may be useful in other cases, when the base specification is in fact based on another standard.

In the context of this specification the "i" status code mandates that the implementation does not change the content of the parameter. It is an implementation option if the implementation acts upon the content of the parameter (e.g. by setting filter criteria to known or unknown parts of parameters in order to find out the route a message has to take).

It must be understood, that this 3GPP SIP profile does not list all parameters which an implementation will treat as indicated by the status code "irrelevant". In general an implementation will pass on all unknown messages, header fields and header parameters, as long as it can perform its normal behaviour.

The following additional comments apply to the interpretation of the tables in this Annex.

NOTE 1: The tables are constructed according to the conventional rules for ICS proformas and profile tables.

NOTE 2: The notation (either directly or as part of a conditional) of "m" for the sending of a parameter and "i" for the receipt of the same parameter, may be taken as indicating that the parameter is passed on transparently, i.e. without modification. Where a conditional applies, this behaviour only applies when the conditional is met.

A.1.3 Roles

Table A.2: Roles

Item	Roles	Reference	RFC status	Profile status
1	User agent	[26]	o.1	o.1
2	Proxy	[26]	o.1	o.1
o.1:	It is mandatory to support exactly one of these items.			
NOTE:	For the purposes of the present document it has been chosen to keep the specification simple by the tables specifying only one role at a time. This does not preclude implementations providing two roles, but an entirely separate assessment of the tables shall be made for each role.			

Table A.3: Roles specific to this profile

Item	Roles	Reference	RFC status	Profile status
1	UE	5.1	n/a	o.1
2	P-CSCF	5.2	n/a	o.1
3	I-CSCF	5.3	n/a	o.1
3A	I-CSCF (THIG)	5.3	n/a	c1
4	S-CSCF	5.4	n/a	o.1
5	BGCF	5.6	n/a	o.1
6	MGCF	5.5	n/a	o.1
7	AS	5.7	n/a	o.1
7A	AS acting as terminating UA, or redirect server	5.7.2	n/a	c2
7B	AS acting as originating UA	5.7.3	n/a	c2
7C	AS acting as a SIP proxy	5.7.4	n/a	c2
7D	AS performing 3rd party call control	5.7.5	n/a	c2
8	MRFC	5.8	n/a	o.1
c1:	IF A.3/3 THEN o ELSE x - - I-CSCF.			
c2:	IF A.3/7 THEN o.2 ELSE n/a - - AS.			
o.1:	It is mandatory to support exactly one of these items.			
o.2:	It is mandatory to support at least one of these items.			
NOTE:	For the purposes of the present document it has been chosen to keep the specification simple by the tables specifying only one role at a time. This does not preclude implementations providing two roles, but an entirely separate assessment of the tables shall be made for each role.			

Table A.3A: Roles specific to additional capabilities

Item	Roles	Reference	RFC status	Profile status
1	Presence server	3GPP TS 24.141 [8A]	n/a	c1
2	Presence user agent	3GPP TS 24.141 [8A]	n/a	c2
3	Resource list server	3GPP TS 24.141 [8A]	n/a	c3
4	Watcher	3GPP TS 24.141 [8A]	n/a	c4
11	Conference focus	3GPP TS 24.147 [8B]	n/a	c5
12	Conference participant	3GPP TS 24.147 [8B]	n/a	c6
c1:	IF A.3/7A AND A.3/7B THEN o ELSE n/a - - AS acting as terminating UA, or redirect server and AS acting as originating UA.			
c2:	IF A.3/1 THEN o ELSE n/a - - UE.			
c3:	IF A.3/7A THEN o ELSE n/a - - AS acting as terminating UA, or redirect server.			
c4:	IF A.3/1 OR A.3/7B THEN o ELSE n/a - - UE or AS acting as originating UA.			
c5:	IF A.3/7D AND A.3/4 AND A.3/8 THEN o ELSE n/a - - AS performing 3rd party call control and S-CSCF and MRFC (note 2).			
c6:	IF A.3/1 OR A.3A/11 THEN o ELSE n/a - - UE or conference focus.			
NOTE 1:	For the purposes of the present document it has been chosen to keep the specification simple by the tables specifying only one role at a time. This does not preclude implementations providing two roles, but an entirely separate assessment of the tables shall be made for each role.			
NOTE 2:	The functional split between the MRFC and the conferencing AS is out of scope of this document and they are assumed to be collocated.			

A.2 Profile definition for the Session Initiation Protocol as used in the present document

A.2.1 User agent role

A.2.1.1 Introduction

This subclause contains the ICS proforma tables related to the user role. They need to be completed only for UA implementations:

Prerequisite: A.2/1 - - user agent role.

A.2.1.2 Major capabilities

Table A.4: Major capabilities

Item	Does the implementation support	Reference	RFC status	Profile status
	Capabilities within main protocol			
1	client behaviour for registration?	[26] subclause 10.2	o	c3
2	registrar?	[26] subclause 10.3	o	c4
2A	registration of multiple contacts for a single address of record	[26] 10.2.1.2, 16.6	o	o
2B	initiating a session?	[26] subclause 13	o	o
3	client behaviour for INVITE requests?	[26] subclause 13.2	c18	c18
4	server behaviour for INVITE requests?	[26] subclause 13.3	c18	c18
5	session release?	[26] subclause 15.1	c18	c18
6	timestamping of requests?	[26] subclause 8.2.6.1	o	o
7	authentication between UA and UA?	[26] subclause 22.2	c34	c34
8	authentication between UA and registrar?	[26] subclause 22.2	o	n/a
8A	authentication between UA and proxy?	[26] 20.28, 22.3	o	o
9	server handling of merged requests due to forking?	[26] 8.2.2.2	m	m
10	client handling of multiple responses due to forking?	[26] 13.2.2.4	m	m
11	insertion of date in requests and responses?	[26] subclause 20.17	o	o
12	downloading of alerting information?	[26] subclause 20.4	o	o
	Extensions			
13	the SIP INFO method?	[25]	o	n/a
14	reliability of provisional responses in SIP?	[27]	c19	c18
15	the REFER method?	[36]	o	c33
16	integration of resource management and SIP?	[30]	c19	c18
17	the SIP UPDATE method?	[29]	c5	c18
19	SIP extensions for media authorization?	[31]	o	c14
20	SIP specific event notification?	[28]	o	c13
21	the use of NOTIFY to establish a dialog?	[28] 4.2	o	n/a
22	acting as the notifier of event information?	[28]	c2	c15
23	acting as the subscriber to event information?	[28]	c2	c16
24	session initiation protocol extension header field for registering non-adjacent contacts?	[35]	o	c6
25	private extensions to the Session Initiation Protocol (SIP) for network asserted identity within trusted networks?	[34]	o	m
26	a privacy mechanism for the Session Initiation Protocol (SIP)?	[33]	o	m
26A	request of privacy by the inclusion of a Privacy header indicating any privacy option?	[33]	c9	c11
26B	application of privacy based on the received Privacy header?	[33]	c9	n/a
26C	passing on of the Privacy header transparently?	[33]	c9	c12
26D	application of the privacy option "header" such that those headers which cannot be completely expunged of identifying information without the assistance of intermediaries are obscured?	[33] 5.1	c10	c27
26E	application of the privacy option "session" such that anonymization for	[33] 5.2	c10	c27

	the session(s) initiated by this message occurs?			
26F	application of the privacy option "user" such that user level privacy functions are provided by the network?	[33] 5.3	c10	c27
26G	application of the privacy option "id" such that privacy of the network asserted identity is provided by the network?	[34] 7	c10	n/a
27	a messaging mechanism for the Session Initiation Protocol (SIP)?	[50]	o	c7
28	session initiation protocol extension header field for service route discovery during registration?	[38]	o	c17
29	compressing the session initiation protocol?	[55]	o	c8
30	private header extensions to the session initiation protocol for the 3rd-Generation Partnership Project (3GPP)?	[52]	o	m
31	the P-Associated-URI header extension?	[52] 4.1	c21	c22
32	the P-Called-Party-ID header extension?	[52] 4.2	c21	c23
33	the P-Visited-Network-ID header extension?	[52] 4.3	c21	c24
34	the P-Access-Network-Info header extension?	[52] 4.4	c21	c25
35	the P-Charging-Function-Addresses header extension?	[52] 4.5	c21	c26
36	the P-Charging-Vector header extension?	[52] 4.6	c21	c26
37	security mechanism agreement for the session initiation protocol?	[48]	o	c20
38	the Reason header field for the session initiation protocol?	[34A]	o	o (note 1)
39	an extension to the session initiation protocol for symmetric response routing?	[56A]	o	x
40	caller preferences for the session initiation protocol?	[56B]	C29	c29
40A	the proxy-directive within caller-preferences?	[56B] 9.1	o.5	o.5
40B	the cancel-directive within caller-preferences?	[56B] 9.1	o.5	o.5
40C	the fork-directive within caller-preferences?	[56B] 9.1	o.5	c28
40D	the recurse-directive within caller-preferences?	[56B] 9.1	o.5	o.5
40E	the parallel-directive within caller-preferences?	[56B] 9.1	o.5	c28
40F	the queue-directive within caller-preferences?	[56B] 9.1	o.5	o.5
41	an event state publication extension to the session initiation protocol?	[70]	o	c30
42	SIP session timer?	[58]	c19	c19
43	the SIP Referred-By mechanism?	[59]	o	c33
44	the Session Initiation Protocol (SIP) "Replaces" header?	[60]	c19	c19 (note 1)
45	the Session Initiation Protocol (SIP) "Join" header?	[61]	c19	c19 (note 1)
46	the callee capabilities?	[62]	o	c35

c2:	IF A.4/20 THEN o.1 ELSE n/a - - SIP specific event notification extension.
c3:	IF A.3/1 OR A.3/4 THEN m ELSE n/a - - UE or S-CSCF functional entity.
c4:	IF A.3/4 THEN m ELSE IF A.3/7 THEN o ELSE n/a - - S-CSCF or AS functional entity.
c5:	IF A.4/16 THEN m ELSE o - - integration of resource management and SIP extension.
c6:	IF A.3/4 OR A.3/1 THEN m ELSE n/a. - - S-CSCF or UE.
c7:	IF A.3/1 OR A.3/4 OR A.3/7A OR A.3/7B OR A.3/7D THEN m ELSE n/a - - UA or S-CSCF or AS acting as terminating UA or AS acting as originating UA or AS performing 3 rd party call control.
c8:	IF A.3/1 THEN m ELSE n/a - - UE behaviour.
c9:	IF A.4/26 THEN o.2 ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c10:	IF A.4/26B THEN o.3 ELSE n/a - - application of privacy based on the received Privacy header.
c11:	IF A.3/1 OR A.3/6 THEN o ELSE n/a - - UE or MGCF.
c12:	IF A.3/7D THEN m ELSE n/a - - AS performing 3rd-party call control.
c13:	IF A.3/1 OR A.3/2 OR A.3/4 THEN m ELSE o - - UE behaviour or S-CSCF.
c14:	IF A.3/1 THEN m ELSE IF A.3/2 THEN o ELSE n/a - UE or P-CSCF.
c15:	IF A.4/20 and A.3/4 THEN m ELSE o - SIP specific event notification extensions and S-CSCF.
c16:	IF A.4/20 and (A.3/1 OR A.3/2) THEN m ELSE o - - SIP specific event notification extension and UE or P-CSCF.
c17:	IF A.3/1 or A.3/4 THEN m ELSE n/a - - UE or S-CSCF.
c18:	IF A.4/2B THEN m ELSE n/a - - initiating sessions.
c19:	IF A.4/2B THEN o ELSE n/a - - initiating sessions.
c20:	IF A.3/1 THEN m ELSE n/a - - UE behaviour.
c21:	IF A.4/30 THEN o.4 ELSE n/a - - private header extensions to the session initiation protocol for the 3rd-Generation Partnership Project (3GPP).
c22:	IF A.4/30 AND (A.3/1 OR A.3/4) THEN m ELSE n/a - - private header extensions to the session initiation protocol for the 3rd-Generation Partnership Project (3GPP) and S-CSCF or UA.
c23:	IF A.4/30 AND A.3/1 THEN o ELSE n/a - - private header extensions to the session initiation protocol for the 3rd-Generation Partnership Project (3GPP) and UE.
c24:	IF A.4/30 AND A.3/4) THEN m ELSE n/a - - private header extensions to the session initiation protocol for the 3rd-Generation Partnership Project (3GPP) and S-CSCF.
c25:	IF A.4/30 AND (A.3/1 OR A.3/4 OR A.3/7A OR A.3/7D) THEN m ELSE n/a - - private header extensions to the session initiation protocol for the 3rd-Generation Partnership Project (3GPP) and UE, S-CSCF or AS acting as terminating UA or AS acting as third-party call controller.
c26:	IF A.4/30 AND (A.3/6 OR A.3/7A OR A.3/7B or A.3/7D) THEN m ELSE n/a - - private header extensions to the session initiation protocol for the 3rd-Generation Partnership Project (3GPP) and MGCF, AS acting as a terminating UA, or AS acting as an originating UA, or AS acting as third-party call controller.
c27:	IF A.3/7D THEN o ELSE x - - AS performing 3rd party call control.
c28:	IF A.3/1 THEN m ELSE o.5 - - UE.
c29:	IF A.4/40A OR A.4/40B OR A.4/40C OR A.4/40D OR A.4/40E OR A.4/40F THEN m ELSE n/a - - support of any directives within caller preferences for the session initiation protocol.
c30:	IF A.3A/1 OR A.3A/2 THEN m ELSE IF A.3/1 THEN o ELSE n/a - - presence server, presence user agent, UE, AS.
c33:	IF A.3/11 OR A.3/12 OR A.4/44 THEN m ELSE o - - conference focus or conference participant or the Session Initiation Protocol (SIP) "Replaces" header.
c34:	IF A.4/44 OR A.4/45 THEN m ELSE n/a - - the Session Initiation Protocol (SIP) "Replaces" header or the Session Initiation Protocol (SIP) "Join" header.
c35:	IF A.3/4 THEN m ELSE IF (A.3/1 OR A.3/6 OR A.3/7 OR A.3/8) THEN o ELSE n/a - - UE, MGCF, AS MRFC or S-CSCF functional entity.
o.1:	At least one of these capabilities is supported.
o.2:	At least one of these capabilities is supported.
o.3:	At least one of these capabilities is supported.
o.4:	At least one of these capabilities is supported.
o.5:	At least one of these capabilities is supported.
NOTE 1:	At the MGCF, the interworking specifications do not support a handling of the header associated with this extension.

Prerequisite A.5/20 - - SIP specific event notification

Table A.4A: Supported event packages

Item	Does the implementation support	Subscriber			Notifier		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	reg event package?	[43]	c1	c3	[43]	c2	c4
2	refer package?	[36] 3	c13	c13	[36] 3	c13	c13
3	presence package?	[74] 6	c1	c5	[74] 6	c2	c6
4	eventlist with underlying presence package?	[75], [74] 6	c1	c7	[75], [74] 6	c2	c8
5	presence.wininfo template-package?	[72] 4	c1	c9	[72] 4	c2	c10
6	xcap-change package?	[77] 2	c1	c11	[77] 2	c2	c12
7	conference package?	[78] 3	c1	c21	[78] 3	c1	c22
c1:	IF A.4/23 THEN o ELSE n/a - - acting as the subscriber to event information.						
c2:	IF A.4/22 THEN o ELSE n/a - - acting as the notifier of event information.						
c3:	IF A.3/1 OR A.3/2 THEN m ELSE IF A.3/7 THEN o ELSE n/a - - UE, P-CSCF, AS.						
c4:	IF A.3/4 THEN m ELSE n/a - - S-CSCF.						
c5:	IF A.3A/3 OR A.3A/4 THEN m ELSE IF A.4/23 THEN o ELSE n/a - - resource list server or watcher, acting as the subscriber to event information.						
c6:	IF A.3A/1 THEN m ELSE IF A.4/22 THEN o ELSE n/a - - watcher, acting as the notifier of event information.						
c7:	IF A.3A/4 THEN m ELSE IF A.4/23 THEN o ELSE n/a - - watcher, acting as the subscriber to event information.						
c8:	IF A.3A/3 THEN m ELSE IF A.4/22 THEN o ELSE n/a - - resource list server, acting as the notifier of event information.						
c9:	IF A.3A/1 THEN m ELSE IF A.4/23 THEN o ELSE n/a - - presence user agent, acting as the subscriber to event information.						
c10:	IF A.3A/2 THEN m ELSE IF A.4/22 THEN o ELSE n/a - - presence server, acting as the notifier of event information.						
c11:	IF A.3A/2 OR A.3A/4 THEN o ELSE IF A.4/23 THEN o ELSE n/a - - watcher or presence user agent, acting as the subscriber to event information.						
c12:	IF A.3A/1 OR A.3A/3 THEN m ELSE IF A.4/22 THEN o ELSE n/a - - presence server or resource list server, acting as the notifier of event information.						
c13:	IF A.4/15 THEN m ELSE n/a - - the REFER method.						
c21:	IF A.3A/12 THEN m ELSE IF A.4/23 THEN o ELSE n/a - - conference participant or acting as the subscriber to event information.						
c22:	IF A.3A/11 THEN m ELSE IF A.4/22 THEN o ELSE n/a - - conference focus or acting as the notifier of event information.						

A.2.1.3 PDUs

Table A.5: Supported methods

Item	PDU	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	ACK request	[26] 13	c10	c10	[26] 13	c11	c11
2	BYE request	[26] 15.1	c12	c12	[26] 15.1	c12	c12
3	BYE response	[26] 15.1	c12	c12	[26] 15.1	c12	c12
4	CANCEL request	[26] 9	m	m	[26] 9	m	m
5	CANCEL response	[26] 9	m	m	[26] 9	m	m
8	INVITE request	[26] 13	c10	c10	[26] 13	c11	c11
9	INVITE response	[26] 13	c11	c11	[26] 13	c10	c10
9A	MESSAGE request	[50] 4	c7	c7	[50] 7	c7	c7
9B	MESSAGE response	[50] 4	c7	c7	[50] 7	c7	c7
10	NOTIFY request	[28] 8.1.2	c4	c4	[28] 8.1.2	c3	c3
11	NOTIFY response	[28] 8.1.2	c3	c3	[28] 8.1.2	c4	c4
12	OPTIONS request	[26] 11	m	m	[26] 11	m	m
13	OPTIONS response	[26] 11	m	m	[26] 11	m	m
14	PRACK request	[27] 6	c5	c5	[27] 6	c5	c5
15	PRACK response	[27] 6	c5	c5	[27] 6	c5	c5
15A	PUBLISH request	[70] 11.1.3	c20	c20	[70] 11.1.3	c20	c20
15B	PUBLISH response	[70] 11.1.3	c20	c20	[70] 11.1.3	c20	c20
16	REFER request	[36] 3	c1	c1	[36] 3	c1	c1
17	REFER response	[36] 3	c1	c1	[36] 3	c1	c1
18	REGISTER request	[26] 10	c8	c8	[26] 10	c9	c9
19	REGISTER response	[26] 10	c9	c9	[26] 10	c8	c8
20	SUBSCRIBE request	[28] 8.1.1	c3	c3	[28] 8.1.1	c4	c4
21	SUBSCRIBE response	[28] 8.1.1	c4	c4	[28] 8.1.1	c3	c3
22	UPDATE request	[30] 6.1	c6	c6	[30] 6.2	c6	c6
23	UPDATE response	[30] 6.2	c6	c6	[30] 6.1	c6	c6
c1:	IF A.4/15 THEN m ELSE n/a -- the REFER method extension.						
c3:	IF A.4/23 THEN m ELSE n/a -- recipient for event information.						
c4:	IF A.4/22 THEN m ELSE n/a -- notifier of event information.						
c5:	IF A.4/14 THEN m ELSE n/a -- reliability of provisional responses extension.						
c6:	IF A.4/17 THEN m ELSE n/a -- the SIP update method extension.						
c7:	IF A.4/27 THEN m ELSE n/a -- the SIP MESSAGE method.						
c8:	IF A.4/1 THEN m ELSE n/a -- client behaviour for registration.						
c9:	IF A.4/2 THEN m ELSE n/a -- registrar.						
c10:	IF A.4/3 THEN m ELSE n/a -- client behaviour for INVITE requests.						
c11:	IF A.4/4 THEN m ELSE n/a -- server behaviour for INVITE requests.						
c12:	IF A.4/5 THEN m ELSE n/a -- session release.						
c20:	IF A.4/41 THEN m ELSE n/a.						

A.2.1.4 PDU parameters

A.2.1.4.1 Status-codes

Table A.6: Supported status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	100 (Trying)	[26] 21.1.1	n/a	n/a	[26] 21.1.1	m	m
2	180 (Ringing)	[26] 21.1.2	c2	c2	[26] 21.1.2	c1	c1
3	181 (Call Is Being Forwarded)	[26] 21.1.3	c2	c2	[26] 21.1.3	c1	c1
4	182 (Queued)	[26] 21.1.4	c2	c2	[26] 21.1.4	c1	c1
5	183 (Session Progress)	[26] 21.1.5	c1	c1	[26] 21.1.5	c1	c1
6	200 (OK)	[26] 21.2.1			[26] 21.2.1		
7	202 (Accepted)	[28] 8.3.1	c3	c3	[28] 8.3.1	c3	c3
8	300 (Multiple Choices)	[26] 21.3.1			[26] 21.3.1		
9	301 (Moved Permanently)	[26] 21.3.2			[26] 21.3.2		
10	302 (Moved Temporarily)	[26] 21.3.3			[26] 21.3.3		
11	305 (Use Proxy)	[26] 21.3.4			[26] 21.3.4		
12	380 (Alternative Service)	[26] 21.3.5			[26] 21.3.5		
13	400 (Bad Request)	[26] 21.4.1	m	m	[26] 21.4.1	m	m
14	401 (Unauthorized)	[26] 21.4.2			[26] 21.4.2		
15	402 (Payment Required)	[26] 21.4.3			[26] 21.4.3		
16	403 (Forbidden)	[26] 21.4.4			[26] 21.4.4		
17	404 (Not Found)	[26] 21.4.5			[26] 21.4.5		
18	405 (Method Not Allowed)	[26] 21.4.6			[26] 21.4.6		
19	406 (Not Acceptable)	[26] 21.4.7			[26] 21.4.7		
20	407 (Proxy Authentication Required)	[26] 21.4.8			[26] 21.4.8		
21	408 (Request Timeout)	[26] 21.4.9			[26] 21.4.9		
22	410 (Gone)	[26] 21.4.10			[26] 21.4.10		
22A	412 (Conditional Request Failed)	[70] 11.2.1	c20	c20	[70] 11.2.1	c20	c20
23	413 (Request Entity Too Large)	[26] 21.4.11			[26] 21.4.11		
24	414 (Request-URI Too Large)	[26] 21.4.12			[26] 21.4.12		
25	415 (Unsupported Media Type)	[26] 21.4.13			[26] 21.4.13		
26	416 (Unsupported URI Scheme)	[26] 21.4.14			[26] 21.4.14		
27	420 (Bad Extension)	[26] 21.4.15			[26] 21.4.15		
28	421 (Extension Required)	[26] 21.4.16			[26] 21.4.16		
28A	422 (Session Interval Too Small)	[58] 6	c7	c7	[58] 6	c7	c7
29	423 (Interval Too Brief)	[26] 21.4.17	c4	c4	[26] 21.4.17	m	m
29A	429 (Provide Referrer Identity)	[59] 5	c8	c8	[59] 5	c9	c9
30	480 (Temporarily Unavailable)	[26] 21.4.18			[26] 21.4.18		
31	481 (Call/Transaction Does Not Exist)	[26] 21.4.19	m	m	[26] 21.4.19	m	m
32	482 (Loop Detected)	[26] 21.4.20			[26] 21.4.20		
33	483 (Too Many Hops)	[26] 21.4.21			[26] 21.4.21		
34	484 (Address Incomplete)	[26] 21.4.22			[26] 21.4.22		
35	485 (Ambiguous)	[26] 21.4.23			[26] 21.4.23		
36	486 (Busy Here)	[26] 21.4.24			[26] 21.4.24		
37	487 (Request Terminated)	[26] 21.4.25			[26] 21.4.25		
38	488 (Not Acceptable Here)	[26] 21.4.26	m	m	[26] 21.4.26	m	m
39	489 (Bad Event)	[28] 7.3.2	c3	c3	[28] 7.3.2	c3	c3
40	491 (Request Pending)	[26] 21.4.27			[26] 21.4.27		
41	493 (Undecipherable)	[26] 21.4.28			[26] 21.4.28		
41A	494 (Security Agreement)	[48] 2	c5	c5	[48] 2	c6	c6

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
	Required)						
42	500 (Internal Server Error)	[26] 21.5.1			[26] 21.5.1		
43	501 (Not Implemented)	[26] 21.5.2			[26] 21.5.2		
44	502 (Bad Gateway)	[26] 21.5.3			[26] 21.5.3		
45	503 (Service Unavailable)	[26] 21.5.4			[26] 21.5.4		
46	504 (Server Time-out)	[26] 21.5.5			[26] 21.5.5		
47	505 (Version not supported)	[26] 21.5.6			[26] 21.5.6		
48	513 (Message Too Large)	[26] 21.5.7			[26] 21.5.7		
49	580 (Precondition Failure)	[30] 8			[30] 8		
50	600 (Busy Everywhere)	[26] 21.6.1			[26] 21.6.1		
51	603 (Decline)	[26] 21.6.2	c10	c10	[26] 21.6.2	m	m
52	604 (Does Not Exist Anywhere)	[26] 21.6.3			[26] 21.6.3		
53	606 (Not Acceptable)	[26] 21.6.4			[26] 21.6.4		
c1:	IF A.5/9 THEN m ELSE n/a - - INVITE response.						
c2:	IF A.5/9 THEN o ELSE n/a - - INVITE response.						
c3:	IF A.4/20 THEN m ELSE n/a - - SIP specific event notification extension.						
c4:	IF A.5/19 OR A.5/21 THEN m ELSE n/a - - REGISTER response or SUBSCRIBE response.						
c5:	IF A.4/37 AND A.4/2 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol and registrar.						
c6:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						
c7:	IF A.4/42 AND (A.5/9 OR A.5/23) THEN m ELSE n/a - - the SIP session timer AND (INVITE response OR UPDATE response).						
c8:	IF A.4/43 AND A.5/17 THEN o ELSE n/a - - the SIP Referred-By mechanism and REFER response.						
c9:	IF A.4/43 AND A.5/17 THEN m ELSE n/a - - the SIP Referred-By mechanism and REFER response.						
c10:	IF A.4/44 THEN m ELSE o - - the Session Initiation Protocol (SIP) "Replaces" header.						
c20:	IF A.4/41 THEN m ELSE n/a						

A.2.1.4.2 ACK method

Prerequisite A.5/1 – ACK request

Table A.7: Supported headers within the ACK request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept-Contact	[56B] 9.2	c9	c9	[56B] 9.2	n/a	n/a
2	Allow-Events	[28] 7.2.2	c1	c1	[28] 7.2.2	c2	c2
3	Authorization	[26] 20.7	c3	c3	[26] 20.7	c3	c3
4	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
6	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
7	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
8	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
9	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
10	Content-Type	[26] 20.15	o	o	[26] 20.15	m	m
11	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
12	Date	[26] 20.17	c4	c4	[26] 20.17	m	m
13	From	[26] 20.20	m	m	[26] 20.20	m	m
14	Max-Forwards	[26] 20.22	m	m	[26] 20.22	n/a	n/a
15	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
15A	Privacy	[33] 4.2	c6	n/a	[33] 4.2	c6	n/a
16	Proxy-Authorization	[26] 20.28	c5	c5	[26] 20.28	n/a	n/a
17	Proxy-Require	[26] 20.29	o	n/a	[26] 20.29	n/a	n/a
17A	Reason	[34A] 2	c8	c8	[34A] 2	c8	c8
17B	Reject-Contact	[56B] 9.2	c9	c9	[56B] 9.2	n/a	n/a
17C	Request-Disposition	[56B] 9.1	c9	c9	[56B] 9.1	n/a	n/a
18	Require	[26] 20.32	o	o	[26] 20.32	m	m
19	Route	[26] 20.34	m	m	[26] 20.34	n/a	n/a
20	Timestamp	[26] 20.38	c7	c7	[26] 20.38	m	m
21	To	[26] 20.39	m	m	[26] 20.39	m	m
22	User-Agent	[26] 20.41	o	o	[26] 20.41	m	m
23	Via	[26] 20.42	m	m	[26] 20.42	m	m
c1:	IF A.4/20 THEN o ELSE n/a -- SIP specific event notification extension.						
c2:	IF A.4/20 THEN m ELSE n/a -- SIP specific event notification extension.						
c3:	IF A.4/7 THEN m ELSE n/a -- authentication between UA and UA.						
c4:	IF A.4/11 THEN o ELSE n/a -- insertion of date in requests and responses.						
c5:	IF A.4/8A THEN m ELSE n/a -- authentication between UA and proxy.						
c6:	IF A.4/26 THEN o ELSE n/a -- a privacy mechanism for the Session Initiation Protocol (SIP).						
c7:	IF A.4/6 THEN o ELSE n/a -- timestamping of requests.						
c8:	IF A.4/38 THEN o ELSE n/a -- the Reason header field for the session initiation protocol.						
c9:	IF A.4/40 THEN o ELSE n/a -- caller preferences for the session initiation protocol.						

Editor's note: Is the following table a suitable way of showing the contents of message bodies.

Prerequisite A.5/1 – ACK request

Table A.8: Supported message bodies within the ACK request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.1.4.3 BYE method

Prerequisite A.5/2 - - BYE request

Table A.9: Supported headers within the BYE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o	o	[26] 20.1	m	m
1A	Accept-Contact	[56B] 9.2	c18	c18	[56B] 9.2	n/a	n/a
2	Accept-Encoding	[26] 20.2	o	o	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o	o	[26] 20.3	m	m
3A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Allow-Events	[28] 7.2.2	c1	c1	[28] 7.2.2	c2	c2
5	Authorization	[26] 20.7	c3	c3	[26] 20.7	c3	c3
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
7	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
8	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
9	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
10	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
11	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
12	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
13	Date	[26] 20.17	c4	c4	[26] 20.17	m	m
14	From	[26] 20.20	m	m	[26] 20.20	m	m
15	Max-Forwards	[26] 20.22	m	m	[26] 20.22	n/a	n/a
16	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
16A	P-Access-Network-Info	[52] 4.4	c9	c10	[52] 4.4	c9	c11
16B	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c6	c6
16C	P-Charging-Function-Addresses	[52] 4.5	c13	c14	[52] 4.5	c13	c14
16D	P-Charging-Vector	[52] 4.6	c12	n/a	[52] 4.6	c12	n/a
16E	P-Preferred-Identity	[34] 9.2	c6	x	[34] 9.2	n/a	n/a
16F	Privacy	[33] 4.2	c7	n/a	[33] 4.2	c7	c7
17	Proxy-Authorization	[26] 20.28	c5	c5	[26] 20.28	n/a	n/a
18	Proxy-Require	[26] 20.29	o	n/a	[26] 20.29	n/a	n/a
18A	Reason	[34A] 2	c17	c17	[34A] 2	c17	c17
19	Record-Route	[26] 20.30	n/a	n/a	[26] 20.30	n/a	n/a
19A	Referred-By	[59] 3	c19	c19	[59] 3	c20	c20
19B	Reject-Contact	[56B] 9.2	c18	c18	[56B] 9.2	n/a	n/a
19C	Request-Disposition	[56B] 9.1	c18	c18	[56B] 9.1	n/a	n/a
20	Require	[26] 20.32	o	o	[26] 20.32	m	m
21	Route	[26] 20.34	m	m	[26] 20.34	n/a	n/a
21A	Security-Client	[48] 2.3.1	c15	c15	[48] 2.3.1	n/a	n/a
21B	Security-Verify	[48] 2.3.1	c16	c16	[48] 2.3.1	n/a	n/a
22	Supported	[26] 20.37	o	o	[26] 20.37	m	m
23	Timestamp	[26] 20.38	c8	c8	[26] 20.38	m	m
24	To	[26] 20.39	m	m	[26] 20.39	m	m
25	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
26	Via	[26] 20.42	m	m	[20] 20.42	m	m

c1:	IF A.4/20 THEN o ELSE n/a -- SIP specific event notification extension.
c2:	IF A.4/20 THEN m ELSE n/a -- SIP specific event notification extension.
c3:	IF A.4/7 THEN m ELSE n/a -- authentication between UA and UA.
c4:	IF A.4/11 THEN o ELSE n/a -- insertion of date in requests and responses.
c5:	IF A.4/8A THEN m ELSE n/a -- authentication between UA and proxy.
c6:	IF A.4/25 THEN o ELSE n/a -- private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c7:	IF A.4/26 THEN o ELSE n/a -- a privacy mechanism for the Session Initiation Protocol (SIP).
c8:	IF A.4/6 THEN o ELSE n/a -- timestamping of requests.
c9:	IF A.4/34 THEN o ELSE n/a -- the P-Access-Network-Info header extension.
c10:	IF A.4/34 AND A.3/1 THEN m ELSE n/a -- the P-Access-Network-Info header extension and UE.
c11:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a -- the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.
c12:	IF A.4/36 THEN o ELSE n/a -- the P-Charging-Vector header extension.
c13:	IF A.4/35 THEN o ELSE n/a -- the P-Charging-Function-Addresses header extension.
c14:	IF A.4/35 THEN m ELSE n/a -- the P-Charging-Function-Addresses header extension.
c15:	IF A.4/37 THEN o ELSE n/a -- security mechanism agreement for the session initiation protocol (note).
c16:	IF A.4/37 THEN m ELSE n/a -- security mechanism agreement for the session initiation protocol.
c17:	IF A.4/38 THEN o ELSE n/a -- the Reason header field for the session initiation protocol.
c18:	IF A.4/40 THEN o ELSE n/a -- caller preferences for the session initiation protocol.
c19:	IF A.4/43 THEN m ELSE n/a -- the SIP Referred-By mechanism.
c20:	IF A.4/43 THEN o ELSE n/a -- the SIP Referred-By mechanism.
NOTE:	Support of this header in this method is dependent on the security mechanism and the security architecture which is implemented. Use of this header in this method is not appropriate to the security mechanism defined by 3GPP TS 33.203 [19].

Prerequisite A.5/2 -- BYE request

Table A.10: Supported message bodies within the BYE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.5/3 -- BYE response

Prerequisite: A.6/1 -- 100 (Trying)

Table A.11: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	n/a	n/a	[26] 20.8	m	m
2	Content-Length	[26] 20.14	n/a	n/a	[26] 20.14	m	m
3	Cseq	[26] 20.16	n/a	n/a	[26] 20.16	m	m
4	Date	[26] 20.17	n/a	n/a	[26] 20.17	m	m
5	From	[26] 20.20	n/a	n/a	[26] 20.20	m	m
6	To	[26] 20.39	n/a	n/a	[26] 20.39	m	m
7	Via	[26] 20.42	n/a	n/a	[26] 20.42	m	m

Prerequisite A.5/3 - - BYE response

Table A.12: Supported headers within the BYE response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
3	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
4	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	c1	c1	[26] 20.17	m	m
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
10A	P-Access-Network-Info	[52] 4.4	c5	c6	[52] 4.4	c5	c6
10B	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c3	c3
10C	P-Charging-Function-Addresses	[52] 4.5	c9	c10	[52] 4.5	c9	c10
10D	P-Charging-Vector	[52] 4.6	c8	n/a	[52] 4.6	c8	n/a
10E	P-Preferred-Identity	[34] 9.2	c3	x	[34] 9.2	n/a	n/a
10F	Privacy	[33] 4.2	c4	n/a	[33] 4.2	c4	c4
10G	Require	[26] 20.32	m	m	[26] 20.32	m	m
10H	Server	[26] 20.35	o	o	[26] 20.35	o	o
11	Timestamp	[26] 20.38	m	m	[26] 20.38	c2	c2
12	To	[26] 20.39	m	m	[26] 20.39	m	m
12A	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
13	Via	[26] 20.42	m	m	[26] 20.42	m	m
14	Warning	[26] 20.43	o (note)	o	[26] 20.43	o	o
c1:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.						
c2:	IF A.4/6 THEN m ELSE n/a - - timestamping of requests.						
c3:	IF A.4/25 THEN o ELSE n/a - - private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c4:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c5:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.						
c6:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.						
c7:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.						
c8:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.						
c9:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c10:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
NOTE:	For a 606 (Not Acceptable Here) response, this status is RECOMMENDED rather than OPTIONAL.						

Prerequisite A.5/3 - - BYE response

Prerequisite: A.6/6 - - 2xx

Table A.13: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Authentication-Info	[26] 20.6	c1	c1	[26] 20.6	c2	c2
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/7 THEN o ELSE n/a - - authentication between UA and UA.						
c2:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.						

Prerequisite A.5/3 - - BYE response

Prerequisite: A.6/8 OR A.6/9 OR A.6/10 OR A.6/11 OR A.6/12 OR A.6/35 - - 3xx or 485 (Ambiguous)

Table A.14: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
0B	Contact	[26] 20.10	o (note)	o	[26] 20.10	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
NOTE: The strength of this requirement is RECOMMENDED rather than OPTIONAL.							

Prerequisite A.5/3 - - BYE response

Prerequisite: A.6/14 - - 401 (Unauthorized)

Table A.15: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
2	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
8	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	m	m
c1: IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.							

Prerequisite A.5/3 - - BYE response

Prerequisite: A.6/17 OR A.6/23 OR A.6/30 OR A.6/36 OR A.6/42 OR A.6/45 OR A.6/50 OR A.6/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.16: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Retry-After	[26] 20.33	o	o	[26] 20.33	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/3 - - BYE response

Prerequisite: A.6/18 - - 405 (Method Not Allowed)

Table A.17: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/3 - - BYE response

Prerequisite: A.6/19 - - 407 (Proxy Authentication Required)

Table A.18: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
2	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
6	WWW-Authenticate	[26] 20.44	o	o	[26] 20.44	o	o
c1:	IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.						

Prerequisite A.5/3 - - BYE response

Prerequisite A.6/25 - - 415 (Unsupported Media Type)

Table A.19: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o.1	o.1	[26] 20.1	m	m
2	Accept-Encoding	[26] 20.2	o.1	o.1	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o.1	o.1	[26] 20.3	m	m
3A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m
o.1	At least one of these capabilities is supported.						

Prerequisite A.5/3 - - BYE response

Prerequisite: A.6/27 - - 420 (Bad Extension)

Table A.20: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
5	Unsupported	[26] 20.40	m	m	[26] 20.40	m	m

Prerequisite A.5/3 - - BYE response

Prerequisite: A.6/28 OR A.6/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.20A: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	x	x	[48] 2	c1	c1
3	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						

Prerequisite A.5/3 - - BYE response

Prerequisite: A.6/34 - - 484 (Address Incomplete)

Table A.21: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/3 - - BYE response

Table A.22: Supported message bodies within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.1.4.4 CANCEL method

Prerequisite A.5/4 - - CANCEL request

Table A.23: Supported headers within the CANCEL request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept-Contact	[56B] 9.2	c9	c9	[56B] 9.2	n/a	n/a
4	Allow-Events	[28] 7.2.2	c1	c1	[28] 7.2.2	c2	c2
5	Authorization	[26] 20.7	c3	c3	[26] 20.7	c3	c3
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
8	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
9	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
10	Date	[26] 20.17	c4	c4	[26] 20.17	m	m
11	From	[26] 20.20	m	m	[26] 20.20	m	m
12	Max-Forwards	[26] 20.22	m	m	[26] 20.22	n/a	n/a
14	Privacy	[33] 4.2	c6	n/a	[33] 4.2	c6	n/a
15	Reason	[34A] 2	c7	c7	[34A] 2	c7	c7
16	Record-Route	[26] 20.30	n/a	n/a	[26] 20.30	n/a	n/a
17	Reject-Contact	[56B] 9.2	c9	c9	[56B] 9.2	n/a	n/a
17A	Request-Disposition	[56B] 9.1	c9	c9	[56B] 9.1	n/a	n/a
18	Route	[26] 20.34	m	m	[26] 20.34	n/a	n/a
19	Supported	[26] 20.37	o	o	[26] 20.37	m	m
20	Timestamp	[26] 20.38	c8	c8	[26] 20.38	m	m
21	To	[26] 20.39	m	m	[26] 20.39	m	m
22	User-Agent	[26] 20.41	o		[26] 20.41	o	
23	Via	[26] 20.42	m	m	[26] 20.42	m	m
c1:	IF A.4/20 THEN o ELSE n/a - - SIP specific event notification extension.						
c2:	IF A.4/20 THEN m ELSE n/a - - SIP specific event notification extension.						
c3:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.						
c4:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.						
c6:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c7:	IF A.4/38 THEN o ELSE n/a - - the Reason header field for the session initiation protocol.						
c8:	IF A.4/6 THEN o ELSE n/a - - timestamping of requests.						
c9:	IF A.4/40 THEN o ELSE n/a - - caller preferences for the session initiation protocol.						

Prerequisite A.5/4 - - CANCEL request

Table A.24: Supported message bodies within the CANCEL request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.5/5 - - CANCEL response

Table A.25: Supported headers within the CANCEL response - all status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
3	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
4	Date	[26] 20.17	c1	c1	[26] 20.17	m	m
5	From	[26] 20.20	m	m	[26] 20.20	m	m
5A	Privacy	[33] 4.2	c3	n/a	[33] 4.2	c3	n/a
6	Timestamp	[26] 20.38	m	m	[26] 20.38	c2	c2
7	To	[26] 20.39	m	m	[26] 20.39	m	m
7A	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
8	Via	[26] 20.42	m	m	[26] 20.42	m	m
9	Warning	[26] 20.43	o (note)	o	[26] 20.43	o	o
c1:		IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.					
c2:		IF A.4/6 THEN m ELSE n/a - - timestamping of requests.					
c3:		IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).					
NOTE:		For a 606 (Not Acceptable Here) response, this status is RECOMMENDED rather than OPTIONAL.					

Prerequisite A.5/5 - - CANCEL response

Prerequisite: A.6/6 - - 200 (OK)

Table A.26: Supported headers within the CANCEL response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Record-Route	[26] 20.30	n/a	n/a	[26] 20.30	n/a	n/a
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/5 - - CANCEL response

Prerequisite: A.6/14 - - 401 (Unauthorized)

Table A.27: Supported headers within the CANCEL response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/5 - - CANCEL response

Prerequisite: A.6/17 OR A.6/23 OR A.6/30 OR A.6/42 OR A.6/45 OR A.6/50 OR A.6/51 - - 404, 413, 480, 500, 503, 600, 603

Table A.28: Supported headers within the CANCEL response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Retry-After	[26] 20.33	o	o	[26] 20.33	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/5 - - CANCEL response

Prerequisite: A.6/34 - - 484 (Address Incomplete)

Table A.30: Supported headers within the CANCEL response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/5 - - CANCEL response

Table A.31: Supported message bodies within the CANCEL response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.1.4.5 COMET method

Void

A.2.1.4.6 INFO method

Void

A.2.1.4.7 INVITE method

Prerequisite A.5/8 - - INVITE request

Table A.46: Supported headers within the INVITE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o	o	[26] 20.1	m	m
1A	Accept-Contact	[56B] 9.2	c24	c24	[56B] 9.2	n/a	n/a
2	Accept-Encoding	[26] 20.2	o	o	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o	o	[26] 20.3	m	m
4	Alert-Info	[26] 20.4	o	o	[26] 20.4	c1	c1
5	Allow	[26] 20.5, [26] 5.1	o (note 1)	o	[26] 20.5, [26] 5.1	m	m
6	Allow-Events	[28] 7.2.2	c2	c2	[28] 7.2.2	c2	c2
8	Authorization	[26] 20.7	c3	c3	[26] 20.7	c3	c3
9	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
10	Call-Info	[26] 20.9	o	o	[26] 20.9	o	o
11	Contact	[26] 20.10	m	m	[26] 20.10	m	m
12	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
13	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
14	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
15	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
16	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
17	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
18	Date	[26] 20.17	c4	c4	[26] 20.17	m	m
19	Expires	[26] 20.19	o	o	[26] 20.19	o	o
20	From	[26] 20.20	m	m	[26] 20.20	m	m
21	In-Reply-To	[26] 20.21	o	o	[26] 20.21	o	o
21A	Join	[61] 7.1	c30	c30	[61] 7.1	c30	c30
22	Max-Forwards	[26] 20.22	m	m	[26] 20.22	n/a	n/a
23	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
23A	Min-SE	[58] 5	c26	c26	[58] 5	c25	c25
24	Organization	[26] 20.25	o	o	[26] 20.25	o	o
24A	P-Access-Network-Info	[52] 4.4	c15	c16	[52] 4.4	c15	c17
24B	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c7	c7
24C	P-Called-Party-ID	[52] 4.2	x	x	[52] 4.2	c13	c13
24D	P-Charging-Function-Addresses	[52] 4.5	c20	c21	[52] 4.5	c20	c21
24E	P-Charging-Vector	[52] 4.6	c18	c19	[52] 4.6	c18	c19
25	P-Media-Authorization	[31] 6.1	n/a	n/a	[31] 6.1	c11	c12
25A	P-Preferred-Identity	[34] 9.2	c7	c5	[34] 9.2	n/a	n/a
25B	P-Visited-Network-ID	[52] 4.3	x (note 3)	x	[52] 4.3	c14	n/a
26	Priority	[26] 20.26	o	o	[26] 20.26	o	o
26A	Privacy	[33] 4.2	c9	c9	[33] 4.2	c9	c9
27	Proxy-Authorization	[26] 20.28	c6	c6	[26] 20.28	n/a	n/a
28	Proxy-Require	[26] 20.29	o (note 2)	o (note 2)	[26] 20.29	n/a	n/a
28A	Reason	[34A] 2	c8	c8	[34A] 2	c8	c8
29	Record-Route	[26] 20.30	n/a	n/a	[26] 20.30	m	m
30	Referred-By	[59] 3	c27	c27	[59] 3	c28	c28
31	Reject-Contact	[56B] 9.2	c24	c24	[56B] 9.2	n/a	n/a
31A	Replaces	[60] 6.1	c29	c29	[60] 6.1	c29	c29
31B	Reply-To	[26] 20.31	o	o	[26] 20.31	o	o
31B	Request-Disposition	[56B] 9.1	c24	c24	[56B] 9.1	n/a	n/a

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
32	Require	[26] 20.32	o	m	[26] 20.32	m	m
33	Route	[26] 20.34	m	m	[26] 20.34	n/a	n/a
33A	Security-Client	[48] 2.3.1	c22	c22	[48] 2.3.1	n/a	n/a
33B	Security-Verify	[48] 2.3.1	c23	c23	[48] 2.3.1	n/a	n/a
33C	Session-Expires	[58] 4	c25	c25	[58] 4	c25	c25
34	Subject	[26] 20.36	o	o	[26] 20.36	o	o
35	Supported	[26] 20.37	c8	m	[26] 20.37	m	m
36	Timestamp	[26] 20.38	c10	c10	[26] 20.38	m	m
37	To	[26] 20.39	m	m	[26] 20.39	m	m
38	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
39	Via	[26] 20.42	m	m	[26] 20.42	m	m
c1:	IF A.4/12 THEN m ELSE n/a -- downloading of alerting information.						
c2:	IF A.4/20 THEN m ELSE n/a -- SIP specific event notification extension.						
c3:	IF A.4/7 THEN m ELSE n/a -- authentication between UA and UA.						
c4:	IF A.4/11 THEN o ELSE n/a -- insertion of date in requests and responses.						
c5:	IF A.3/1 AND A.4/25 THEN o ELSE n/a -- UE and private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c6:	IF A.4/8A THEN m ELSE n/a -- authentication between UA and proxy.						
c7:	IF A.4/25 THEN o ELSE n/a -- private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c8:	IF A.4/38 THEN o ELSE n/a -- the Reason header field for the session initiation protocol.						
c9:	IF A.4/26 THEN o ELSE n/a -- a privacy mechanism for the Session Initiation Protocol (SIP).						
c10:	IF A.4/6 THEN o ELSE n/a -- timestamping of requests.						
c11:	IF A.4/19 THEN m ELSE n/a -- SIP extensions for media authorization.						
c12:	IF A.3/1 THEN m ELSE n/a -- UE.						
c13:	IF A.4/32 THEN o ELSE n/a -- the P-Called-Party-ID extension.						
c14:	IF A.4/33 THEN o ELSE n/a -- the P-Visited-Network-ID extension.						
c15:	IF A.4/34 THEN o ELSE n/a -- the P-Access-Network-Info header extension.						
c16:	IF A.4/34 AND A.3/1 THEN m ELSE n/a -- the P-Access-Network-Info header extension and UE.						
c17:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a -- the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.						
c18:	IF A.4/36 THEN o ELSE n/a -- the P-Charging-Vector header extension.						
c19:	IF A.4/36 THEN m ELSE n/a -- the P-Charging-Vector header extension.						
c20:	IF A.4/35 THEN o ELSE n/a -- the P-Charging-Function-Addresses header extension.						
c21:	IF A.4/35 THEN m ELSE n/a -- the P-Charging-Function-Addresses header extension.						
c22:	IF A.4/37 THEN o ELSE n/a -- security mechanism agreement for the session initiation protocol (note 4).						
c23:	IF A.4/37 THEN m ELSE n/a -- security mechanism agreement for the session initiation protocol.						
c24:	IF A.4/40 THEN o ELSE n/a -- caller preferences for the session initiation protocol.						
c25:	IF A.4/42 THEN m ELSE n/a -- the SIP session timer.						
c26:	IF A.4/42 THEN o ELSE n/a -- the SIP session timer.						
c27:	IF A.4/43 THEN m ELSE n/a -- the SIP Referred-By mechanism.						
c28:	IF A.4/43 THEN o ELSE n/a -- the SIP Referred-By mechanism.						
c29:	IF A.4/44 THEN m ELSE n/a -- the Session Initiation Protocol (SIP) "Replaces" header.						
c30:	IF A.4/45 THEN m ELSE n/a -- the Session Initiation Protocol (SIP) "Join" header.						
o.1:	At least one of these shall be supported.						
NOTE 1:	The strength of this requirement in RFC 3261 [26] is RECOMMENDED, rather than OPTIONAL.						
NOTE 2:	No distinction has been made in these tables between first use of a request on a From/To/Call-ID combination, and the usage in a subsequent one. Therefore the use of "o" etc. above has been included from a viewpoint of first usage.						
NOTE 3:	The strength of this requirement in RFC 3455 [52] is SHOULD NOT, rather than MUST NOT.						
NOTE 4:	Support of this header in this method is dependent on the security mechanism and the security architecture which is implemented. Use of this header in this method is not appropriate to the security mechanism defined by 3GPP TS 33.203 [19].						

Prerequisite A.5/8 -- INVITE request

Table A.47: Supported message bodies within the INVITE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/1 - - 100 (Trying)

Table A.48: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	n/a	n/a	[26] 20.8	m	m
2	Content-Length	[26] 20.14	n/a	n/a	[26] 20.14	m	m
3	Cseq	[26] 20.16	n/a	n/a	[26] 20.16	m	m
4	Date	[26] 20.17	n/a	n/a	[26] 20.17	m	m
5	From	[26] 20.20	n/a	n/a	[26] 20.20	m	m
6	To	[26] 20.39	n/a	n/a	[26] 20.39	m	m
7	Via	[26] 20.42	n/a	n/a	[26] 20.42	m	m

Prerequisite A.5/9 - - INVITE response

Table A.49: Supported headers within the INVITE response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
1A	Call-Info	[26] 20.9	o	o	[26] 20.9	o	o
2	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
3	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
4	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	c1	c1	[26] 20.17	m	m
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
11	Organization	[26] 20.25	o	o	[26] 20.25	o	o
11A	P-Access-Network-Info	[52] 4.4	c5	c6	[52] 4.4	c5	c7
11B	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c3	c3
11C	P-Charging-Function-Addresses	[52] 4.5	c10	c11	[52] 4.5	c11	c11
11D	P-Charging-Vector	[52] 4.6	c8	c9	[52] 4.6	c8	c9
11E	P-Preferred-Identity	[34] 9.2	c3	x	[34] 9.2	n/a	n/a
11F	Privacy	[33] 4.2	c4	c4	[33] 4.2	c4	c4
11G	Require	[26] 20.32	m	m	[26] 20.32	m	m
11H	Server	[26] 20.35	o	o	[26] 20.35	o	o
12	Timestamp	[26] 20.38	m	m	[26] 20.38	c2	c2
13	To	[26] 20.39	m	m	[26] 20.39	m	m
13A	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
14	Via	[26] 20.42	m	m	[26] 20.42	m	m
15	Warning	[26] 20.43	o (note)	o	[26] 20.43	o	o
c1:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.						
c2:	IF A.4/6 THEN m ELSE n/a - - timestamping of requests.						
c3:	IF A.4/25 THEN o ELSE n/a - - private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c4:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c5:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.						
c6:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.						
c7:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.						
c8:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.						
c9:	IF A.4/36 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c10:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c11:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
NOTE:	For a 606 (Not Acceptable Here) response, this status is RECOMMENDED rather than OPTIONAL.						

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/2 OR A.6/3 OR A.6/4 OR A.6/5 - - 1xx

Table A.50: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Contact	[26] 20.10	o	m	[26] 20.10	m	m
6	P-Media-Authorization	[31] 6.1	n/a	n/a	[31] 6.1	c11	c12
9	Rseq	[27] 7.1	c2	m	[27] 7.1	c3	m
11	Supported	[26] 20.37	o	o	[26] 20.37	m	m
c2:	IF A.4/14 THEN o ELSE n/a - - reliability of provisional responses in SIP.						
c3:	IF A.4/14 THEN m ELSE n/a - - reliability of provisional responses in SIP.						
c11:	IF A.4/19 THEN m ELSE n/a - - SIP extensions for media authorization.						
c12:	IF A.3/1 THEN m ELSE n/a - - UE.						

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/6 - - 2xx

Table A.51: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o	o	[26] 20.1	m	m
1A	Accept-Encoding	[26] 20.2	o	o	[26] 20.2	m	m
1B	Accept-Language	[26] 20.3	o	o	[26] 20.3	m	m
2	Allow	[26] 20.5	o (note 1)	o	[26] 20.5	m	m
4	Authentication-Info	[26] 20.6	c1	c1	[26] 20.6	c2	c2
6	Contact	[26] 20.10	m	m	[26] 20.10	m	m
8	P-Media-Authorization	[31] 6.1	n/a	n/a	[31] 6.1	c11	c12
9	Record-Route	[26] 20.30	m	m	[26] 20.30	m	m
10	Session-Expires	[58] 4	c13	c13	[58] 4	c13	c13
13	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/7 THEN o ELSE n/a - - authentication between UA and UA.						
c2:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.						
c11:	IF A.4/19 THEN m ELSE n/a - - SIP extensions for media authorization.						
c12:	IF A.3/1 THEN m ELSE n/a - - UE.						
c13:	IF A.4/42 THEN m ELSE n/a - - the SIP session timer.						
NOTE 1:	The strength of this requirement in RFC 3261 [26] is RECOMMENDED, rather than OPTIONAL.						

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/8 OR A.6/9 OR A.6/10 OR A.6/11 OR A.6/12 OR A.6/35 - - 3xx or 485 (Ambiguous)

Table A.52: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Contact	[26] 20.10	o (note 1)	o	[26] 20.10	m	m
5	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
10	Supported	[26] 20.37	m	m	[26] 20.37	m	m
NOTE:	The strength of this requirement is RECOMMENDED rather than OPTIONAL.						

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/14 - - 401 (Unauthorized)

Table A.53: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
6	Proxy-Authenticate	[26] 20.27	c3	c3	[26] 20.27	c3	c3
10	Supported	[26] 20.37	m	m	[26] 20.37	m	m
13	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	m	m
c1: IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses. c2: IF A.4/6 THEN m ELSE n/a - - timestamping of requests. c3: IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.							

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/17 OR A.6/23 OR A.6/30 OR A.6/36 OR A.6/50 OR A.6/51 - - 404, 413, 480, 486, 600, 603

Table A.54: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
8	Retry-After	[26] 20.33	o	o	[26] 20.33	o	o
10	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/18 - - 405 (Method Not Allowed)

Table A.55: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Allow	[26] 20.5	m	m	[26] 20.5	m	m
5	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
10	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/20 - - 407 (Proxy Authentication Required)

Table A.56: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
6	Proxy-Authenticate	[26] 20.27	o		[26] 20.27	o	
10	Supported	[26] 20.37	m	m	[26] 20.37	m	m
11	WWW-Authenticate	[26] 20.44	o	o	[26] 20.44	o	o
c1: IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.							

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/25 - - 415 (Unsupported Media Type)

Table A.57: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o.1	o.1	[26] 20.1	m	m
2	Accept-Encoding	[26] 20.2	o.1	o.1	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o.1	o.1	[26] 20.3	m	m
3A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
6	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
11	Supported	[26] 20.37	m	m	[26] 20.37	m	m
o.1	At least one of these capabilities is supported.						

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/27 - - 420 (Bad Extension)

Table A.58: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
9	Supported	[26] 20.37	m	m	[26] 20.37	m	m
10	Unsupported	[26] 20.40	m	m	[26] 20.40	m	m

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/28 OR A.6/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.58A: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	x	x	[48] 2	c1	c1
3	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/28A - - 422 (Session Interval Too Small)

Table A.58B: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Min-SE	[58] 5	c1	c1	[58] 5	c1	c1
c1:		IF A.4/42 THEN o ELSE n/a - - the SIP session timer.					

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/34 - - 484 (Address Incomplete)

Table A.59: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
9	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/42 - - 500 (Server Internal Error)

Table A.60: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
8	Retry-After	[26] 20.33	m	m	[26] 20.33	o	o
10	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/9 - - INVITE response

Prerequisite: A.6/45 - - 503 (Service Unavailable)

Table A.61: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
8	Retry-After	[26] 20.33	o	o	[26] 20.33	o	m
10	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/9 - - INVITE response

Table A.62: Supported message bodies within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.1.4.7A MESSAGE method

Prerequisite A.5/9A - - MESSAGE request

Table A.62A: Supported headers within the MESSAGE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept-Contact	[56B] 9.2	c24	c24	[56B] 9.2	n/a	n/a
1A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Allow-Events	[28] 7.2.2	c1	c1	[28] 7.2.2	c2	c2
3	Authorization	[26] 20.7	c3	c3	[26] 20.7	c3	c3
4	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
5	Call-Info	[26] 20.9	o	o	[26] 20.9	o	o
6	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
7	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
8	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
9	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
10	Content-Type	[26] 20.15	m	m	[26] 29.15	m	m
11	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
12	Date	[26] 20.17	c4	c4	[26] 20.17	m	m
13	Expires	[26] 20.19	o	o	[26] 20.19	o	o
14	From	[26] 20.20	m	m	[26] 20.20	m	m
15	In-Reply-To	[26] 20.21	o	o	[26] 20.21	o	o
16	Max-Forwards	[26] 20.22	m	m	[26] 20.22	n/a	n/a
17	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
18	Organization	[26] 20.25	o	o	[26] 20.25	o	o
18A	P-Access-Network-Info	[52] 4.4	c15	c16	[52] 4.4	c15	c16
18B	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c11	c11
18C	P-Called-Party-ID	[52] 4.2	x	x	[52] 4.2	c13	c13
18D	P-Charging-Function-Addresses	[52] 4.5	c20	c21	[52] 4.5	c20	c21
18E	P-Charging-Vector	[52] 4.6	c18	c19	[52] 4.6	c18	c19
18F	P-Preferred-Identity	[34] 9.2	c11	c7	[34] 9.2	n/a	n/a
18G	P-Visited-Network-ID	[52] 4.3	x (note 1)	x	[52] 4.3	c14	n/a
19	Priority	[26] 20.26	o	o	[26] 20.26	o	o
19A	Privacy	[33] 4.2	c12	c12	[33] 4.2	c12	c12
20	Proxy-Authorization	[26] 20.28	c5	c5	[26] 20.28	n/a	n/a
21	Proxy-Require	[26] 20.29	o	n/a	[26] 20.29	n/a	n/a
21A	Reason	[34A] 2	c6	c6	[34A] 2	c6	c6
22	Record-Route	[26] 20.30	n/a	n/a	[26] 20.30	n/a	n/a
22A	Referred-By	[59] 3	c25	c25	[59] 3	c26	c26
23	Reject-Contact	[56B] 9.2	c24	c24	[56B] 9.2	n/a	n/a
23A	Reply-To	[26] 20.31	o	o	[26] 20.31	o	o
23B	Request-Disposition	[56B] 9.1	c24	c24	[56B] 9.1	n/a	n/a
24	Require	[26] 20.32	c8	o	[26] 20.32	m	m
25	Route	[26] 20.34	m	m	[26] 20.34	n/a	n/a
25A	Security-Client	[48] 2.3.1	c22	c22	[48] 2.3.1	n/a	n/a
25B	Security-Verify	[48] 2.3.1	c23	c23	[48] 2.3.1	n/a	n/a
26	Subject	[26] 20.35	o	o	[26] 20.36	o	o
27	Supported	[26] 20.37	c9	m	[26] 20.37	m	m
28	Timestamp	[26] 20.38	c10	c10	[26] 20.38	m	m
29	To	[26] 20.39	m	m	[26] 20.39	m	m
30	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
31	Via	[26] 20.42	m	m	[26] 20.42	m	m

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
c1:	IF A.4/20 THEN o ELSE n/a -- SIP specific event notification extension.						
c2:	IF A.4/20 THEN m ELSE n/a -- SIP specific event notification extension.						
c3:	IF A.4/7 THEN m ELSE n/a -- authentication between UA and UA.						
c4:	IF A.4/11 THEN o ELSE n/a -- insertion of date in requests and responses.						
c5:	IF A.162/8A THEN m ELSE i -- authentication between UA and proxy.						
c6:	IF A.4/38 THEN o ELSE n/a -- the Reason header field for the session initiation protocol.						
c7:	IF A.3/1 AND A.4/25 THEN o ELSE n/a -- UE and private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c8:	IF A.4/14 THEN o.1 ELSE o -- Reliable transport.						
c9:	IF IF A.4/14 THEN o.1 ELSE o -- support of reliable transport.						
c10:	IF A.4/6 THEN o ELSE n/a -- timestamping of requests.						
c11:	IF A.4/25 THEN o ELSE n/a -- private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c12:	IF A.4/26 THEN o ELSE n/a -- a privacy mechanism for the Session Initiation Protocol (SIP).						
c13:	IF A.4/32 THEN o ELSE n/a -- the P-Called-Party-ID extension.						
c14:	IF A.4/33 THEN o ELSE n/a -- the P-Visited-Network-ID extension.						
c15:	IF A.4/34 THEN o ELSE n/a -- the P-Access-Network-Info header extension.						
c16:	IF A.4/34 AND A.3/1 THEN m ELSE n/a -- the P-Access-Network-Info header extension and UE.						
c17:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a -- the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.						
c18:	IF A.4/36 THEN o ELSE n/a -- the P-Charging-Vector header extension.						
c19:	IF A.4/36 THEN m ELSE n/a -- the P-Charging-Vector header extension.						
c20:	IF A.4/35 THEN o ELSE n/a -- the P-Charging-Function-Addresses header extension.						
c21:	IF A.4/35 THEN m ELSE n/a -- the P-Charging-Function-Addresses header extension.						
c22:	IF A.4/37 THEN o ELSE n/a -- security mechanism agreement for the session initiation protocol (note 2).						
c23:	IF A.4/37 THEN m ELSE n/a -- security mechanism agreement for the session initiation protocol.						
c24:	IF A.4/40 THEN o ELSE n/a -- caller preferences for the session initiation protocol.						
c25:	IF A.4/43 THEN m ELSE n/a -- the SIP Referred-By mechanism.						
c26:	IF A.4/43 THEN o ELSE n/a -- the SIP Referred-By mechanism.						
NOTE 1:	The strength of this requirement in RFC 3455 [52] is SHOULD NOT, rather than MUST NOT.						
NOTE 2:	Support of this header in this method is dependent on the security mechanism and the security architecture which is implemented. Use of this header in this method is not appropriate to the security mechanism defined by 3GPP TS 33.203 [19].						

Prerequisite A.5/9A -- MESSAGE request

Table A.62B: Supported message bodies within the MESSAGE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.5/9B - - MESSAGE response

Table A.62C: Supported headers within the MESSAGE response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Call-Info	[26] 20.9	o	o	[26] 20.9	o	o
3	Content-Disposition	[26] 20.11	o (note 2)	o (note 2)	[26] 20.11	m (note 2)	m (note 2)
4	Content-Encoding	[26] 20.12	o (note 2)	o (note 2)	[26] 20.12	m (note 2)	m (note 2)
5	Content-Language	[26] 20.13	o (note 2)	o (note 2)	[26] 20.13	m (note 2)	m (note 2)
6	Content-Length	[26] 20.14	m (note 2)	m (note 2)	[26] 20.14	m (note 2)	m (note 2)
7	Content-Type	[26] 20.15	m (note 2)	m (note 2)	[26] 20.15	m (note 2)	m (note 2)
8	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
9	Date	[26] 20.17	c1	c1	[26] 20.17	m	m
10	From	[26] 20.20	m	m	[26] 20.20	m	m
11	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
12	Organization	[26] 20.25	o	o	[26] 20.25	o	o
12A	P-Access-Network-Info	[52] 4.4	c5	c6	[52] 4.4	c5	c7
12B	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c3	c3
12C	P-Charging-Function-Addresses	[52] 4.5	c10	c11	[52] 4.5	c10	c11
12D	P-Charging-Vector	[52] 4.6	c8	c9	[52] 4.6	c8	c9
12E	P-Preferred-Identity	[34] 9.2	c3	x	[34] 9.2	n/a	n/a
12F	Privacy	[33] 4.2	c4	c4	[33] 4.2	c4	c4
12G	Require	[26] 20.32	o	o	[26] 20.32	m	m
13	Server	[26] 20.35	o	o	[26] 20.35	o	o
14	Timestamp	[26] 20.38	m	m	[26] 20.38	c2	c2
15	To	[26] 20.39	m	m	[26] 20.39	m	m
16	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
17	Via	[26] 20.42	m	m	[26] 20.42	m	m
18	Warning	[26] 20.43	o	o	[26] 20.43	o	o
c1:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.						
c2:	IF A.4/6 THEN m ELSE n/a - - timestamping of requests.						
c3:	IF A.4/25 THEN o ELSE n/a - - private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c4:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c5:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.						
c6:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.						
c7:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.						
c8:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.						
c9:	IF A.4/36 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c10:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c11:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
NOTE 1:	For a 606 (Not Acceptable Here) response, this status is RECOMMENDED rather than OPTIONAL.						
NOTE 2:	RFC 3428 [50] clause 7 states that all 2xx class responses to a MESSAGE request must not include any body, therefore for 2xx responses to the MESSAGE request the values on Sending side for "RFC status" and "Profile status" are "x", the values for Receiving side for "RFC status" and "Profile Status" are "n/a". RFC 3261 [26] subclause 7.4 states that all responses may contain bodies, therefore for all responses to the MESSAGE request other than 2xx responses, the values on Sending side for "RFC status" and "Profile status" are "o", the values for Receiving side for "RFC status" and "Profile Status" are "m".						

Prerequisite A.5/9B - - MESSAGE response

Prerequisite: A.6/6 - - 2xx

Table A.62D: Supported headers within the MESSAGE response

Item	Header	Sending	Receiving
------	--------	---------	-----------

		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Authentication-Info	[26] 20.6	c1	c1	[26] 20.6	c2	c2
4	Supported	[26] 20.37	o	o	[26] 20.37	m	m
c1:		IF A.4/7 THEN o ELSE n/a - - authentication between UA and UA.					
c2:		IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.					

Prerequisite A.5/9B - - MESSAGE response

Prerequisite: A.6/8 OR A.6/9 OR A.6/10 OR A.6/11 OR A.6/12 OR A.6/35 - - 3xx or 485 (Ambiguous)

Table A.62E: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Contact	[26] 20.10	o (note)	o	[26] 20.10	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
NOTE:		The strength of this requirement is RECOMMENDED rather than OPTIONAL.					

Prerequisite A.5/9B - - MESSAGE response

Prerequisite: A.6/14 - - 401 (Unauthorized)

Table A.62F: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
6	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	m	m
c1:		IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.					

Prerequisite A.5/9B - - MESSAGE response

Prerequisite: A.6/17 OR A.6/23 OR A.6/30 OR A.6/36 OR A.6/42 OR A.6/45 OR A.6/50 OR A.6/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.62G: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Retry-After	[26] 20.33	o	o	[26] 20.33	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/9B - - MESSAGE response

Prerequisite: A.6/18 - - 405 (Method Not Allowed)

Table A.62H: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/9B - - MESSAGE response

Prerequisite: A.6/20 - - 407 (Proxy Authentication Required)

Table A.62I: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
6	WWW-Authenticate	[26] 20.44	o	o	[26] 20.44	o	o
c1:		IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.					

Prerequisite A.5/9B - - MESSAGE response

Prerequisite: A.6/25 - - 415 (Unsupported Media Type)

Table A.62J: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o.1	o.1	[26] 20.1	m	m
2	Accept-Encoding	[26] 20.2	o.1	o.1	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o.1	o.1	[26] 20.3	m	m
4	Allow	[26] 20.5	o	o	[26] 20.5	m	m
5	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m
o.1		At least one of these capabilities is supported.					

Prerequisite A.5/9B - - MESSAGE response

Prerequisite: A.6/27 - - 420 (Bad Extension)

Table A.62K: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
5	Unsupported	[26] 20.40	m	m	[26] 20.40	m	m

Prerequisite A.5/9B - - MESSAGE response

Prerequisite: A.6/28 OR A.6/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.62L: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	x	x	[48] 2	c1	c1
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:		IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.					

Prerequisite A.5/9B - - MESSAGE response

Prerequisite: A.6/34 - - 484 (Address Incomplete)

Table A.62M: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/9B - - MESSAGE response

Table A.62N: Supported message bodies within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.1.4.8 NOTIFY method

Prerequisite A.5/10 - - NOTIFY request

Table A.63: Supported headers within the NOTIFY request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o	o	[26] 20.1	m	m
1A	Accept-Contact	[56B] 9.2	c19	c19	[56B] 9.2	n/a	n/a
2	Accept-Encoding	[26] 20.2	o	o	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o	o	[26] 20.3	m	m
3A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Allow-Events	[28] 7.2.2	c1	c1	[28] 7.2.2	c2	c2
5	Authorization	[26] 20.7	c3	c3	[26] 20.7	c3	c3
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
6A	Contact	[26] 20.10	m	m	[26] 20.10	m	m
7	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
8	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
9	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
10	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
11	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
12	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
13	Date	[26] 20.17	c4	c4	[26] 20.17	m	m
14	Event	[28] 7.2.1	m	m	[28] 7.2.1	m	m
15	From	[26] 20.20	m	m	[26] 20.20	m	m
16	Max-Forwards	[26] 20.22	m	m	[26] 20.22	n/a	n/a
17	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
17A	P-Access-Network-Info	[52] 4.4	c10	c11	[52] 4.4	c10	c12
17B	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c6	c6
17C	P-Charging-Function-Addresses	[52] 4.5	c14	c15	[52] 4.5	c14	c15
17D	P-Charging-Vector	[52] 4.6	c13	n/a	[52] 4.6	c13	n/a
17E	P-Preferred-Identity	[34] 9.2	c6	x	[34] 9.2	n/a	n/a
17F	Privacy	[33] 4.2	c7	n/a	[33] 4.2	c7	c7
18	Proxy-Authorization	[26] 20.28	c5	c5	[26] 20.28	n/a	n/a
19	Proxy-Require	[26] 20.29	o	n/a	[26] 20.29	n/a	n/a
19A	Reason	[34A] 2	c18	c18	[34A] 2	c18	c18
20	Record-Route	[26] 20.30	n/a	n/a	[26] 20.30	c9	c9
20A	Referred-By	[59] 3	c20	c20	[59] 3	c21	c21
20B	Reject-Contact	[56B] 9.2	c19	c19	[56B] 9.2	n/a	n/a
20C	Request-Disposition	[56B] 9.1	c19	c19	[56B] 9.1	n/a	n/a
21	Require	[26] 20.32	o	o	[26] 20.32	m	m
22A	Security-Client	[48] 2.3.1	c16	c16	[48] 2.3.1	n/a	n/a
22B	Security-Verify	[48] 2.3.1	c17	c17	[48] 2.3.1	n/a	n/a
22	Route	[26] 20.34	m	m	[26] 20.34	n/a	n/a
23	Subscription-State	[28] 8.2.3	m	m	[28] 8.2.3	m	m
24	Supported	[26] 20.37	o	o	[26] 20.37	m	m
25	Timestamp	[26] 20.38	c8	c8	[26] 20.38	m	m
26	To	[26] 20.39	m	m	[26] 20.39	m	m
27	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
28	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN o ELSE n/a - - SIP specific event notification extension.
c2:	IF A.4/20 THEN m ELSE n/a - - SIP specific event notification extension.
c3:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.
c4:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.
c5:	IF A.4/8A THEN m ELSE n/a - - authentication between UA and proxy.
c6:	IF A.4/25 THEN o ELSE n/a - - private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c7:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c8:	IF A.4/6 THEN o ELSE n/a - - timestamping of requests.
c9:	IF A.4/15 OR A.4/20 THEN m ELSE n/a - - the REFER method extension or SIP specific event notification extension.
c10:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.
c11:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.
c12:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.
c13:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.
c14:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.
c15:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c16:	IF A.4/37 THEN o ELSE n/a - - security mechanism agreement for the session initiation protocol (note).
c17:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c18:	IF A.4/38 THEN o ELSE n/a - - the Reason header field for the session initiation protocol.
c19:	IF A.4/40 THEN o ELSE n/a - - caller preferences for the session initiation protocol.
c20:	IF A.4/43 THEN m ELSE n/a - - the SIP Referred-By mechanism.
c21:	IF A.4/43 THEN o ELSE n/a - - the SIP Referred-By mechanism.
NOTE:	Support of this header in this method is dependent on the security mechanism and the security architecture which is implemented. Use of this header in this method is not appropriate to the security mechanism defined by 3GPP TS 33.203 [19].

Prerequisite A.5/10 - - NOTIFY request

Table A.64: Supported message bodies within the NOTIFY request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	sipfrag	[37] 2	c1	c1	[37]	c1	c1
c1:	IF A.4/15 THEN m ELSE o - - the REFER method extension						

Prerequisite A.5/11 - - NOTIFY response

Table A.65: Supported headers within the NOTIFY response - all status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
3	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
4	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	c1	c1	[26] 20.17	m	m
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
10A	P-Access-Network-Info	[52] 4.4	c5	c6	[52] 4.4	c5	c7
10B	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c3	c3
10C	P-Charging-Function-Addresses	[52] 4.5	c9	c10	[52] 4.5	c9	c10
10D	P-Charging-Vector	[52] 4.6	c8	n/a	[52] 4.6	c8	n/a
10E	P-Preferred-Identity	[34] 9.2	c3	x	[34] 9.2	n/a	n/a
10F	Privacy	[33] 4.2	c4	n/a	[33] 4.2	c4	c4
10G	Require	[26] 20.32	m	m	[26] 20.32	m	m
10H	Server	[26] 20.35	o	o	[26] 20.35	o	o
11	Timestamp	[26] 20.38	m	m	[26] 20.38	c2	c2
12	To	[26] 20.39	m	m	[26] 20.39	m	m
12A	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
13	Via	[26] 20.42	m	m	[26] 20.42	m	m
14	Warning	[26] 20.43	o (note)	o	[26] 20.43	o	o
c1:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.						
c2:	IF A.4/6 THEN m ELSE n/a - - timestamping of requests.						
c3:	IF A.4/25 THEN o ELSE n/a - - private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c4:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c5:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.						
c6:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.						
c7:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.						
c8:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.						
c9:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c10:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
NOTE:	For a 606 (Not Acceptable Here) response, this status is RECOMMENDED rather than OPTIONAL.						

Prerequisite A.5/11 - - NOTIFY response

Prerequisite: A.6/6 and A.6/7 - - 2xx

Table A.66: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Authentication-Info	[26] 20.6	c1	c1	[26] 20.6	c2	c2
1A	Contact	[26] 20.10	m	m	[26] 20.10	m	m
2	Record-Route	[26] 20.30	c3	c3	[26] 20.30	c3	c3
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/7 THEN o ELSE n/a - - authentication between UA and UA.						
c2:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.						
c3:	IF A.4/15 OR A.4/20 THEN m ELSE n/a - - the REFER method extension or SIP specific event notification extension.						

Prerequisite A.5/11 - - NOTIFY response

Prerequisite: A.6/8 OR A.6/9 OR A.6/10 OR A.6/11 OR A.6/12 OR A.6/35 - - 3xx or 485 (Ambiguous)

Table A.67: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Contact	[26] 20.10	m (note)	m	[26] 20.10	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
NOTE: The strength of this requirement is RECOMMENDED rather than MANDATORY for a 485 response.							

Prerequisite A.5/11 - - NOTIFY response

Prerequisite: A.6/14 - - 401 (Unauthorized)

Table A.68: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
2	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
8	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	m	m
c1: IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.							

Prerequisite A.5/11 - - NOTIFY response

Prerequisite: A.6/17 OR A.6/23 OR A.6/30 OR A.6/36 OR A.6/42 OR A.6/45 OR A.6/50 OR A.6/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.69: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Retry-After	[26] 20.33	o	o	[26] 20.33	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/11 - - NOTIFY response

Prerequisite: A.6/18 -- 405 (Method Not Allowed)

Table A.70: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/11 - - NOTIFY response

Prerequisite: A.6/20 - - 407 (Proxy Authentication Required)

Table A.71: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
2	Proxy-Authenticate	[26] 20.27	c3	c3	[26] 20.27	c3	c3
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
6	WWW-Authenticate	[26] 20.44	o	o	[26] 20.44	o	o
c3:	IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.						

Prerequisite A.5/11 - - NOTIFY response

Prerequisite A.6/25 - - 415 (Unsupported Media Type)

Table A.72: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o.1	o.1	[26] 20.1	m	m
2	Accept-Encoding	[26] 20.2	o.1	o.1	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o.1	o.1	[26] 20.3	m	m
3A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/11 - - NOTIFY response

Prerequisite: A.6/27 - - 420 (Bad Extension)

Table A.73: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
5	Unsupported	[26] 20.40	m	m	[26] 20.40	m	m

Prerequisite A.5/11 - - NOTIFY response

Prerequisite: A.6/28 OR A.6/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.73A: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	x	x	[48] 2	c1	c1
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						

Prerequisite A.5/11 - - NOTIFY response

Prerequisite: A.6/34 - - 484 (Address Incomplete)

Table A.74: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/11 - - NOTIFY response

Prerequisite: A.6/39 - - 489 (Bad Event)

Table A.75: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o

Prerequisite A.5/11 - - NOTIFY response

Table A.76: Supported message bodies within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.1.4.9 OPTIONS method

Prerequisite A.5/12 - - OPTIONS request

Table A.77: Supported headers within the OPTIONS request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	m	m
1A	Accept-Contact	[56B] 9.2	c21	c21	[56B] 9.2	n/a	n/a
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	m	m
3A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Allow-Events	[28] 7.2.2	c1	c1	[28] 7.2.2	c1	c1
5	Authorization	[26] 20.7	c2	c2	[26] 20.7	c2	c2
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
7	Call-Info	[26] 20.9	o	o	[26] 20.9	o	o
8	Contact	[26] 20.10	o	o	[26] 20.10	o	o
9	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
10	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
11	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
12	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
13	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
14	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
15	Date	[26] 20.17	c3	c3	[26] 20.17	m	m
16	From	[26] 20.20	m	m	[26] 20.20	m	m
17	Max-Forwards	[26] 20.22	m	m	[26] 20.22	n/a	n/a
18	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
19	Organization	[26] 20.25	o	o	[26] 20.25	o	o
19A	P-Access-Network-Info	[52] 4.4	c11	c12	[52] 4.4	c11	c13
19B	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c6	c6
19C	P-Called-Party-ID	[52] 4.2	x	x	[52] 4.2	c9	c9
19D	P-Charging-Function-Addresses	[52] 4.5	c16	c17	[52] 4.5	c16	c17
19E	P-Charging-Vector	[52] 4.6	c14	c15	[52] 4.6	c14	c15
19F	P-Preferred-Identity	[34] 9.2	c6	c4	[34] 9.2	n/a	n/a
19G	P-Visited-Network-ID	[52] 4.3	x (note 2)	x	[52] 4.3	c10	n/a
19H	Privacy	[33] 4.2	c8	c8	[33] 4.2	c8	c8
20	Proxy-Authorization	[26] 20.28	c5	c5	[26] 20.28	n/a	n/a
21	Proxy-Require	[26] 20.29	o	o (note 1)	[26] 20.29	n/a	n/a
21A	Reason	[34A] 2	c20	c20	[34A] 2	c20	c20
22	Record-Route	[26] 20.30	n/a	n/a	[26] 20.30	n/a	n/a
22A	Referred-By	[59] 3	c22	c22	[59] 3	c23	c23
22B	Reject-Contact	[56B] 9.2	c21	c21	[56B] 9.2	n/a	n/a
22C	Request-Disposition	[56B] 9.1	c21	c21	[56B] 9.1	n/a	n/a
23	Require	[26] 20.32	o	o	[26] 20.32	m	m
24	Route	[26] 20.34	m	m	[26] 20.34	n/a	n/a
24A	Security-Client	[48] 2.3.1	c18	c18	[48] 2.3.1	n/a	n/a
24B	Security-Verify	[48] 2.3.1	c19	c19	[48] 2.3.1	n/a	n/a
25	Supported	[26] 20.37	c6	c6	[26] 20.37	m	m
26	Timestamp	[26] 20.38	c7	c7	[26] 20.38	m	m
27	To	[26] 20.39	m	m	[26] 20.39	m	m
28	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
29	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN m ELSE n/a - - SIP specific event notification extension.
c2:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.
c3:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.
c4:	IF A.3/1 AND A.4/25 THEN o ELSE n/a - - UE and private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c5:	IF A.4/8A THEN m ELSE n/a - - authentication between UA and proxy.
c6:	IF A.4/25 THEN o ELSE n/a - - private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c7:	IF A.4/6 THEN o ELSE n/a - - timestamping of requests.
c8:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c9:	IF A.4/32 THEN o ELSE n/a - - the P-Called-Party-ID extension.
c10:	IF A.4/33 THEN o ELSE n/a - - the P-Visited-Network-ID extension.
c11:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.
c12:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.
c13:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.
c14:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.
c15:	IF A.4/36 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c16:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.
c17:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c18:	IF A.4/37 THEN o ELSE n/a - - security mechanism agreement for the session initiation protocol (note 3).
c19:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c20:	IF A.4/38 THEN o ELSE n/a - - the Reason header field for the session initiation protocol.
c21:	IF A.4/40 THEN o ELSE n/a - - caller preferences for the session initiation protocol.
c22:	IF A.4/43 THEN m ELSE n/a - - the SIP Referred-By mechanism.
c23:	IF A.4/43 THEN o ELSE n/a - - the SIP Referred-By mechanism.
NOTE 1: No distinction has been made in these tables between first use of a request on a From/To/Call-ID combination, and the usage in a subsequent one. Therefore the use of "o" etc. above has been included from a viewpoint of first usage.	
NOTE 2: The strength of this requirement in RFC 3455 [52] is SHOULD NOT, rather than MUST NOT.	
NOTE 3: Support of this header in this method is dependent on the security mechanism and the security architecture which is implemented. Use of this header in this method is not appropriate to the security mechanism defined by 3GPP TS 33.203 [19].	

Prerequisite A.5/12 - - OPTIONS request

Table A.78: Supported message bodies within the OPTIONS request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.5/13 - - OPTIONS response

Prerequisite: A.6/1 - - 100 (Trying)

Table A.79: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	n/a	n/a	[26] 20.8	m	m
2	Content-Length	[26] 20.14	n/a	n/a	[26] 20.14	m	m
3	Cseq	[26] 20.16	n/a	n/a	[26] 20.16	m	m
4	Date	[26] 20.17	n/a	n/a	[26] 20.17	m	m
5	From	[26] 20.20	n/a	n/a	[26] 20.20	m	m
6	To	[26] 20.39	n/a	n/a	[26] 20.39	m	m
7	Via	[26] 20.42	n/a	n/a	[26] 20.42	m	m

Prerequisite A.5/13 - - OPTIONS response

Table A.80: Supported headers within the OPTIONS response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
1A	Call-Info	[26] 20.9	o	o	[26] 20.9	o	o
2	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
3	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
4	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	c1	c1	[26] 20.17	m	m
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
11	Organization	[26] 20.25	o	o	[26] 20.25	o	o
11A	P-Access-Network-Info	[52] 4.4	c5	c6	[52] 4.4	c5	c7
11B	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c3	c3
11C	P-Charging-Function-Addresses	[52] 4.5	c10	c11	[52] 4.5	c10	c11
11D	P-Charging-Vector	[52] 4.6	c8	c9	[52] 4.6	c8	c9
11E	P-Preferred-Identity	[34] 9.2	c3	x	[34] 9.2	n/a	n/a
11F	Privacy	[33] 4.2	c4	c4	[33] 4.2	c4	c4
11G	Require	[26] 20.32	m	m	[26] 20.32	m	m
12	Timestamp	[26] 20.38	m	m	[26] 20.38	c2	c2
13	To	[26] 20.39	m	m	[26] 20.39	m	m
13A	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
14	Via	[26] 20.42	m	m	[26] 20.42	m	m
15	Warning	[26] 20.43	o (note)	o	[26] 20.43	o	o
c1:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.						
c2:	IF A.4/6 THEN m ELSE n/a - - timestamping of requests.						
c3:	IF A.4/25 THEN o ELSE n/a - - private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c4:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c5:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.						
c6:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.						
c7:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.						
c8:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.						
c9:	IF A.4/36 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c10:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c11:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
NOTE:	For a 606 (Not Acceptable Here) response, this status is RECOMMENDED rather than OPTIONAL.						

Prerequisite A.5/13 - - OPTIONS response

Prerequisite: A.6/6 - - 2xx

Table A.81: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	m	m
2	Allow	[26] 20.5	o (note 1)	o	[26] 20.5	m	m
3	Authentication-Info	[26] 20.6	c1	c1	[26] 20.6	c2	c2
5	Contact	[26] 20.10	o		[26] 20.10	o	
8	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/7 THEN o ELSE n/a - - authentication between UA and UA.						
c2:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.						
NOTE 1:	The strength of this requirement in RFC 3261 [26] is RECOMMENDED, rather than OPTIONAL.						

Prerequisite A.5/13 - - OPTIONS response

Prerequisite: A.6/8 OR A.6/9 OR A.6/10 OR A.6/11 OR A.6/12 OR A.6/35 - - 3xx or 485 (Ambiguous)

Table A.82: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Contact	[26] 20.10	o (note)	o	[26] 20.10	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m

NOTE: The strength of this requirement is RECOMMENDED rather than OPTIONAL.

Prerequisite A.5/13 - - OPTIONS response

Prerequisite: A.6/14 - - 401 (Unauthorized)

Table A.83: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m
10	WWW-Authenticate	[26] 20.44	o		[26] 20.44	o	

c1: IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.

Prerequisite A.5/13 - - OPTIONS response

Prerequisite: A.6/17 OR A.6/23 OR A.6/30 OR A.6/36 OR A.6/42 OR A.6/45 OR A.6/50 OR A.6/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.84: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
5	Retry-After	[26] 20.33	o	o	[26] 20.33	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/13 - - OPTIONS response

Prerequisite: A.6/18 - - 405 (Method Not Allowed)

Table A.85: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Allow	[26] 20.5	m	m	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/13 - - OPTIONS response

Prerequisite: A.6/20 - - 407 (Proxy Authentication Required)

Table A.86: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m
8	WWW-Authenticate	[26] 20.44	o	o	[26] 20.44	o	o
c1:	IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.						

Prerequisite A.5/13 - - OPTIONS response

Prerequisite: A.6/25 - - 415 (Unsupported Media Type)

Table A.87: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o.1	o.1	[26] 20.1	m	m
2	Accept-Encoding	[26] 20.2	o.1	o.1	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o.1	o.1	[26] 20.3	m	m
4	Allow	[26] 20.5	o	o	[26] 20.5	m	m
5	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
8	Supported	[26] 20.37	m	m	[26] 20.37	m	m
o.1	At least one of these capabilities is supported.						

Prerequisite A.5/13 - - OPTIONS response

Prerequisite: A.6/27 - - 420 (Bad Extension)

Table A.88: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
6	Supported	[26] 20.37	m	m	[26] 20.37	m	m
7	Unsupported	[26] 20.40	m	m	[26] 20.40	m	m

Prerequisite A.5/13 - - OPTIONS response

Prerequisite: A.6/28 OR A.6/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.88A: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	x	x	[48] 2	c1	c1
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						

Prerequisite A.5/13 - - OPTIONS response

Prerequisite: A.6/34 - - 484 (Address Incomplete)

Table A.89: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/13 - - OPTIONS response

Table A.90: Supported message bodies within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.1.4.10 PRACK method

Prerequisite A.5/14 - - PRACK request

Table A.91: Supported headers within the PRACK request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o	o	[26] 20.1	m	m
1A	Accept-Contact	[56B] 9.2	c15	c15	[56B] 9.2	n/a	n/a
2	Accept-Encoding	[26] 20.2	o	o	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o	o	[26] 20.3	m	m
3A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Allow-Events	[28] 7.2.2	c1	c1	[28] 7.2.2	c2	c2
5	Authorization	[26] 20.7	c3	c3	[26] 20.7	c3	c3
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
7	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
8	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
9	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
10	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
11	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
12	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
13	Date	[26] 20.17	c4	c4	[26] 20.17	m	m
14	From	[26] 20.20	m	m	[26] 20.20	m	m
15	Max-Forwards	[26] 20.22	m	m	[26] 20.22	n/a	n/a
16	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
16A	P-Access-Network-Info	[52] 4.4	c9	c10	[52] 4.4	c9	c11
16B	P-Charging-Function-Addresses	[52] 4.5	c13	c14	[52] 4.5	c13	c14
16C	P-Charging-Vector	[52] 4.6	c12	n/a	[52] 4.6	c12	n/a
16D	Privacy	[33] 4.2	c6	n/a	[33] 4.2	c6	n/a
17	Proxy-Authorization	[26] 20.28	c5	c5	[26] 20.28	n/a	n/a
18	Proxy-Require	[26] 20.29	o	n/a	[26] 20.29	n/a	n/a
19	Rack	[27] 7.2	m	m	[27] 7.2	m	m
19A	Reason	[34A] 2	c7	c7	[34A] 2	c7	c7
20	Record-Route	[26] 20.30	n/a	n/a	[26] 20.30	n/a	n/a
20A	Referred-By	[59] 3	c16	c16	[59] 3	c17	c17
20B	Reject-Contact	[56B] 9.2	c15	c15	[56B] 9.2	n/a	n/a
20C	Request-Disposition	[56B] 9.1	c15	c15	[56B] 9.1	n/a	n/a
21	Require	[26] 20.32	o	o	[26] 20.32	m	m
22	Route	[26] 20.34	m	m	[26] 20.34	n/a	n/a
23	Supported	[26] 20.37	o	o	[26] 20.37	m	m
24	Timestamp	[26] 20.38	c8	c8	[26] 20.38	m	m
25	To	[26] 20.39	m	m	[26] 20.39	m	m
26	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
27	Via	[26] 20.42	m	m	[26] 20.42	m	m
c1:	IF A.4/20 THEN o ELSE n/a - - SIP specific event notification extension.						
c2:	IF A.4/20 THEN m ELSE n/a - - SIP specific event notification extension.						
c3:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.						
c4:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.						
c5:	IF A.4/8A THEN m ELSE n/a - - authentication between UA and proxy.						
c6:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c7:	IF A.4/38 THEN o ELSE n/a - - the Reason header field for the session initiation protocol.						
c8:	IF A.4/6 THEN o ELSE n/a - - timestamping of requests.						
c9:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.						
c10:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.						
c11:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.						
c12:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.						
c13:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c14:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c15:	IF A.4/40 THEN o ELSE n/a - - caller preferences for the session initiation protocol.						
c16:	IF A.4/43 THEN m ELSE n/a - - the SIP Referred-By mechanism.						
c17:	IF A.4/43 THEN o ELSE n/a - - the SIP Referred-By mechanism.						

Prerequisite A.5/14 - - PRACK request

Table A.92: Supported message bodies within the PRACK request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.5/15 - - PRACK response

Prerequisite: A.6/1 - - 100 (Trying)

Table A.93: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	n/a	n/a	[26] 20.8	m	m
2	Content-Length	[26] 20.14	n/a	n/a	[26] 20.14	m	m
3	Cseq	[26] 20.16	n/a	n/a	[26] 20.16	m	m
4	Date	[26] 20.17	n/a	n/a	[26] 20.17	m	m
5	From	[26] 20.20	n/a	n/a	[26] 20.20	m	m
6	To	[26] 20.39	n/a	n/a	[26] 20.39	m	m
7	Via	[26] 20.42	n/a	n/a	[26] 20.42	m	m

Prerequisite A.5/15 - - PRACK response

Table A.94: Supported headers within the PRACK response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
3	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
4	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	c1	c1	[26] 20.17	m	m
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
10A	P-Access-Network-Info	[52] 4.4	c3	c4	[52] 4.4	c3	c5
10B	P-Charging-Function-Addresses	[52] 4.5	c7	c8	[52] 4.5	c7	c8
10C	P-Charging-Vector	[52] 4.6	c6	n/a	[52] 4.6	c6	n/a
10D	Privacy	[33] 4.2	c2	n/a	[33] 4.2	c2	n/a
10E	Require	[26] 20.32	o	o	[26] 20.32	m	m
10F	Server	[26] 20.35	o	o	[26] 20.35	o	o
11	Timestamp	[26] 20.38	m	m	[26] 20.38	c2	c2
12	To	[26] 20.39	m	m	[26] 20.39	m	m
12A	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
13	Via	[26] 20.42	m	m	[26] 20.42	m	m
14	Warning	[26] 20.43	o (note)	o	[26] 20.43	o	o
c1:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.						
c2:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c3:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.						
c4:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.						
c5:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.						
c6:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.						
c7:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c8:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
NOTE:	For a 606 (Not Acceptable Here) response, this status is RECOMMENDED rather than OPTIONAL.						

Prerequisite A.5/15 - - PRACK response

Prerequisite: A.6/6 - - 2xx

Table A.95: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
0B	Authentication-Info	[26] 20.6	c1	c1	[26] 20.6	c2	c2
3	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/7 THEN o ELSE n/a - - authentication between UA and UA.						
c2:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.						

Prerequisite A.5/15 - - PRACK response

Prerequisite: A.6/8 OR A.6/9 OR A.6/10 OR A.6/11 OR A.6/12 OR A.6/35 - - 3xx or 485 (Ambiguous)

Table A.96: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Contact	[26] 20.10	o (note)	o	[26] 20.10	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

NOTE: The strength of this requirement is RECOMMENDED rather than OPTIONAL.

Prerequisite A.5/15 - - PRACK response

Prerequisite: A.6/14 - - 401 (Unauthorized)

Table A.97: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
2	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
8	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	m	m

c1: IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.

Prerequisite A.5/15 - - PRACK response

Prerequisite: A.6/17 OR A.6/23 OR A.6/30 OR A.6/36 OR A.6/42 OR A.6/45 OR A.6/50 OR A.6/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.98: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Retry-After	[26] 20.33	o	o	[26] 20.33	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/15 - - PRACK response

Prerequisite: A.6/18 - - 405 (Method Not Allowed)

Table A.99: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/15 - - PRACK response

Prerequisite: A.6/20 - - 407 (Proxy Authentication Required)

Table A.100: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
2	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
6	WWW-Authenticate	[26] 20.44	o	o	[26] 20.44	o	o
c1:	IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.						

Prerequisite A.5/15 - - PRACK response

Prerequisite: A.6/25 - - 415 (Unsupported Media Type)

Table A.101: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o.1	o.1	[26] 20.1	m	m
2	Accept-Encoding	[26] 20.2	o.1	o.1	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o.1	o.1	[26] 20.3	m	m
3A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/15 - - PRACK response

Prerequisite: A.6/27 - - 420 (Bad Extension)

Table A.102: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/15 - - PRACK response

Prerequisite: A.6/28 OR A.6/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.102A: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	x	x	[48] 2	c1	c1
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						

Prerequisite A.5/15 - - PRACK response

Prerequisite: A.6/34 - - 484 (Address Incomplete)

Table A.103: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/15 - - PRACK response

Table A.104: Supported message bodies within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.1.4.10A PUBLISH method

Editor's note: The base draft does not yet contain an analysis of header usage within this method, and therefore this clause will have to be reviewed and completed when such an analysis is available.

Prerequisite A.5/15A – PUBLISH request

Table A.104A: Supported headers within the PUBLISH request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept-Contact	[56B] 9.2	c24	c24	[56B] 9.2	n/a	n/a
2	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Allow-Events	[26] 7.2.2	c1	c1	[26] 7.2.2	c2	c2
4	Authorization	[26] 20.7	c3	c3	[26] 20.7	c3	c3
5	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
6	Call-Info	[26] 20.9	o	o	[26] 20.9	o	o
7	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
8	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
9	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
10	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
11	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
12	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
13	Date	[26] 20.17	c4	c4	[26] 20.17	m	m
14	Event	[28] 8.2.1	m	m	[28] 8.2.1	m	m
15	Expires	[26] 20.19, [70] 4, 5, 6	o (note 1)	o (note 1)	[26] 20.19, [70] 4, 5, 6	m	m
16	From	[26] 20.20	m	m	[26] 20.20	m	m
17	In-Reply-To	[26] 20.21	o	o	[26] 20.21	o	o
18	Max-Forwards	[26] 20.22	m	m	[26] 20.22	n/a	n/a
19	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
20	Organization	[26] 20.25	o	o	[26] 20.25	o	o
21	P-Access-Network-Info	[52] 4.4	c15	c16	[52] 4.4	c15	c17
22	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c11	c11
23	P-Called-Party-ID	[52] 4.2	x	x	[52] 4.2	c13	c13
24	P-Charging-Function-Addresses	[52] 4.5	c20	c21	[52] 4.5	c20	c21
25	P-Charging-Vector	[52] 4.6	c18	c19	[52] 4.6	c18	c19
26	P-Preferred-Identity	[34] 9.2	c11	c7	[34] 9.2	n/a	n/a
27	P-Visited-Network-ID	[52] 4.3	x (note 3)	x	[52] 4.3	c14	n/a
28	Priorità	[26] 20.26	o	o	[26] 20.26	o	o
29	Privacy	[33] 4.2	c12	c12	[33] 4.2	c12	c12
30	Proxy-Authorization	[26] 20.28	c5	c5	[26] 20.28	n/a	n/a
31	Proxy-Require	[26] 20.29	o	n/a	[26] 20.29	n/a	n/a
32	Reason	[34A] 2	c8	c8	[34A] 2	c8	c8
33	Reject-Contact	[56B] 9.2	c22	c22	[56B] 9.2	n/a	n/a
33A	Referred-By	[59] 3	c25	c25	[59] 3	c26	c26
34	Request-Disposition	[56B] 9.1	c22	c22	[56B] 9.1	n/a	n/a
35	Reply-To	[26] 20.31	o	o	[26] 20.31	o	o
36	Require	[26] 20.32	o	o	[26] 20.32	m	m
37	Route	[26] 20.34	m	m	[26] 20.34	n/a	n/a
38	Security-Client	[48] 2.3.1	c9	c9	[48] 2.3.1	n/a	n/a
39	Security-Verify	[48] 2.3.1	c10	c10	[48] 2.3.1	n/a	n/a
40	SIP-If-Match	[70] 11.3.2	o	o	[70] 11.3.2	m	m
41	Subject	[26] 20.36	o	o	[26] 20.36	o	o
42	Supported	[26] 20.37, [26] 7.1	o	o	[26] 20.37, [26] 7.1	m	m
43	Timestamp	[26] 20.38	c6	c6	[26] 20.38	m	m
44	To	[26] 20.39	m	m	[26] 20.39	m	m
45	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
46	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN o ELSE n/a - - SIP specific event notification extension.
c2:	IF A.4/20 THEN m ELSE n/a - - SIP specific event notification extension.
c3:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.
c4:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.
c5:	IF A.4/8A THEN m ELSE n/a - - authentication between UA and proxy.
c6:	IF A.4/6 THEN o ELSE n/a - - timestamping of requests.
c7:	IF A.3/1 AND A.4/25 THEN o ELSE n/a - - UE and private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c8:	IF A.4/38 THEN o ELSE n/a - - the Reason header field for the session initiation protocol.
c9:	IF A.4/37 THEN o ELSE n/a - - security mechanism agreement for the session initiation protocol (note 2).
c10:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c11:	IF A.4/25 THEN o ELSE n/a - - private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c12:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c13:	IF A.4/32 THEN o ELSE n/a - - the P-Called-Party-ID extension.
c14:	IF A.4/33 THEN o ELSE n/a - - the P-Visited-Network-ID extension.
c15:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.
c16:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.
c17:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.
c18:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.
c19:	IF A.4/36 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c20:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.
c21:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c22:	IF A.4/40 THEN o ELSE n/a - - caller preferences for the session initiation protocol.
c24:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.
c25:	IF A.4/43 THEN m ELSE n/a - - the SIP Referred-By mechanism.
c26:	IF A.4/43 THEN o ELSE n/a - - the SIP Referred-By mechanism.
NOTE 1:	The strength of this requirement is RECOMMENDED rather than OPTIONAL.
NOTE 2:	Support of this header in this method is dependent on the security mechanism and the security architecture which is implemented.
NOTE 3:	The strength of this requirement in RFC 3455 [52] is SHOULD NOT, rather than MUST NOT.

Prerequisite A.5/15A - - PUBLISH request

Table A.104B: Supported message bodies within the PUBLISH request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.5/15B - - PUBLISH response

Table A.104C: Supported headers within the PUBLISH response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Call-Info	[26] 24.9	o	o	[26] 24.9	m	m
3	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
4	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
5	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
6	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
7	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
8	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
9	Date	[26] 20.17	c1	c1	[26] 20.17	m	m
10	From	[26] 20.20	m	m	[26] 20.20	m	m
11	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
12	Organization	[26] 20.25	o	o	[26] 20.25	o	o
13	P-Access-Network-Info	[52] 4.4	c5	c6	[52] 4.4	c5	c7
14	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c3	c3
15	P-Charging-Function-Addresses	[52] 4.5	c10	c11	[52] 4.5	c10	c11
16	P-Charging-Vector	[52] 4.6	c8	c9	[52] 4.6	c8	c9
17	P-Preferred-Identity	[34] 9.2	c3	x	[34] 9.2	n/a	n/a
18	Privacy	[33] 4.2	c4	c4	[33] 4.2	c4	c4
19	Require	[26] 20.32	m	m	[26] 20.32	m	m
20	Server	[26] 20.35	o	o	[26] 20.35	o	o
21	Timestamp	[26] 20.38	m	m	[26] 20.38	c2	c2
22	To	[26] 20.39	m	m	[26] 20.39	m	m
23	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
24	Via	[26] 20.42	m	m	[26] 20.42	m	m
25	Warning	[26] 20.43	o	o	[26] 20.43	o	o
c1:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.						
c2:	IF A.4/6 THEN m ELSE n/a - - timestamping of requests.						
c3:	IF A.4/25 THEN o ELSE n/a - - private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c4:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c5:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.						
c6:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.						
c7:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.						
c8:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.						
c9:	IF A.4/36 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c10:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c11:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
NOTE:	For a 606 (Not Acceptable Here) response, this status is RECOMMENDED rather than OPTIONAL.						

Prerequisite A.5/15B - - PUBLISH response

Prerequisite: A.6/7 - - 200 (OK)

Table A.104D: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Authentication-Info	[26] 20.6	c1	c1	[26] 20.6	c2	c2
3	Expires	[26] 20.19, [70] 4, 5, 6	m	m	[26] 20.19, [70] 4, 5, 6	m	m
4	SIP-Etag	[70] 11.3.1	m	m	[70] 11.3.1	m	m
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:		IF A.4/7 THEN o ELSE n/a - - authentication between UA and UA.					
c2:		IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.					

Prerequisite A.5/15B - - PUBLISH response

Prerequisite: A.6/8 OR A.6/9 OR A.6/10 OR A.6/11 OR A.6/12 OR A.6/35 - - 3xx or 485 (Ambiguous)

Table A.104E: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Contact	[26] 20.10	o (note)	o	[26] 20.10	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
NOTE:		The strength of this requirement is RECOMMENDED rather than OPTIONAL.					

Prerequisite A.5/15B - - PUBLISH response

Prerequisite: A.6/8 OR A.6/9 OR A.6/10 OR A.6/11 OR A.6/12 - 401 (Unauthorized)

Table A.104F: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
5	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	m	m
c1:		IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.					

Prerequisite A.5/15B - - PUBLISH response

Prerequisite: A.6/17 OR A.6/23 OR A.6/30 OR A.6/36 OR A.6/42 OR A.6/45 OR A.6/50 OR A.6/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.104G: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Retry-After	[26] 20.33	o	o	[26] 20.33	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/15B - - PUBLISH response

Prerequisite: A.6/18 - - 405 (Method Not Allowed)

Table A.104H: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/15B - - PUBLISH response

Prerequisite: A.6/20 - - 407 (Proxy Authentication Required)

Table A.104I: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
5	WWW-Authenticate	[26] 20.44	o	o	[26] 20.44	o	o
c1:	IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.						

Prerequisite A.5/15B - - PUBLISH response

Prerequisite: A.6/25 - - 415 (Unsupported Media Type)

Table A.104J: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o.1	o.1	[26] 20.1	m	m
2	Accept-Encoding	[26] 20.2	o.1	o.1	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o.1	o.1	[26] 20.3	m	m
4	Allow	[26] 20.5	o	o	[26] 20.5	m	m
5	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
6	Supported	[26] 20.37	m	m	[26] 20.37	m	m
o.1	At least one of these capabilities is supported.						

Prerequisite A.5/15B - - PUBLISH response

Prerequisite: A.6/27 - - 420 (Bad Extension)

Table A.104K: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Supported	[26] 20.37	m	m	[26] 20.37	m	m
4	Unsupported	[26] 20.40	m	m	[26] 20.40	m	m

Prerequisite A.5/15B - - PUBLISH response

Prerequisite: A.6/28 OR A.6/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.104L: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	x	x	[48] 2	c1	c1
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						

Prerequisite A.5/15B - - PUBLISH response

Prerequisite: A.6/29 - - 423 (Interval Too Brief)

Table A.104M: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Min-Expires	[26] 20.23, [70] 5, 6	m	m	[26] 20.23, [70] 5, 6	m	m
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/15B - - PUBLISH response

Prerequisite: A.6/34 - - 484 (Address Incomplete)

Table A.104N: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/15B - - PUBLISH response

Prerequisite: A.6/39 - - 489 (Bad Event)

Table A.104O: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Allow-Events	[28] 8.2.2	m	m	[28] 8.2.2	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o

Prerequisite A.5/15B - - PUBLISH response

Table A.104P: Supported message bodies within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.1.4.11 REFER method

Prerequisite A.5/16 - - REFER request

Table A.105: Supported headers within the REFER request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Accept	[26] 20.1	o	o	[26] 20.1	m	m
0B	Accept-Contact	[56B] 9.2	c22	c22	[56B] 9.2	n/a	n/a
0C	Accept-Encoding	[26] 20.2	o	o	[26] 20.2	m	m
1	Accept-Language	[26] 20.3	o	o	[26] 20.3	m	m
1A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Allow-Events	[28] 7.2.2	c1	c1	[28] 7.2.2	c2	c2
3	Authorization	[26] 20.7	c3	c3	[26] 20.7	c3	c3
4	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
5	Contact	[26] 20.10	m	m	[26] 20.10	m	m
5A	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
5B	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
5C	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
6	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
7	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
8	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
9	Date	[26] 20.17	c4	c4	[26] 20.17	m	m
10	Expires	[26] 20.19	o	o	[26] 20.19	o	o
11	From	[26] 20.20	m	m	[26] 20.20	m	m
12	Max-Forwards	[26] 20.22	m	m	[26] 20.22	n/a	n/a
13	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
14	Organization	[26] 20.25	o	o	[26] 20.25	o	o
14A	P-Access-Network-Info	[52] 4.4	c12	c13	[52] 4.4	c12	c14
14B	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c8	c8
14C	P-Called-Party-ID	[52] 4.2	x	x	[52] 4.2	c10	c10
14D	P-Charging-Function-Addresses	[52] 4.5	c17	c18	[52] 4.5	c17	c18
14E	P-Charging-Vector	[52] 4.6	c15	c16	[52] 4.6	c15	c16
14F	P-Preferred-Identity	[34] 9.2	c8	c7	[34] 9.2	n/a	n/a
14G	P-Visited-Network-ID	[52] 4.3	x (note 1)	x	[52] 4.3	c11	n/a
14H	Privacy	[33] 4.2	c9	c9	[33] 4.2	c9	c9
15	Proxy-Authorization	[26] 20.28	c5	c5	[26] 20.28	n/a	n/a
16	Proxy-Require	[26] 20.29	o	n/a	[26] 20.29	n/a	n/a
16A	Reason	[34A] 2	c21	c21	[34A] 2	c21	c21
17	Record-Route	[26] 20.30	n/a	n/a	[26] 20.30	m	m
18	Refer-To	[36] 3	m	m	[36] 3	m	m
18A	Referred-By	[59] 3	c23	c23	[59] 3	c23	c23
18B	Reject-Contact	[56B] 9.2	c22	c22	[56B] 9.2	n/a	n/a
18C	Request-Disposition	[56B] 9.1	c22	c22	[56B] 9.1	n/a	n/a
19	Require	[26] 20.32	o	o	[26] 20.32	m	m
20	Route	[26] 20.34	m	m	[26] 20.34	n/a	n/a
20A	Security-Client	[48] 2.3.1	c19	c19	[48] 2.3.1	n/a	n/a
20B	Security-Verify	[48] 2.3.1	c20	c20	[48] 2.3.1	n/a	n/a
20C	Subject	[26] 20.36	o	o	[26] 20.36	o	o
21	Supported	[26] 20.37, [26] 7.1	o	o	[26] 20.37, [26] 7.1	m	m
22	Timestamp	[26] 20.38	c6	c6	[26] 20.38	m	m
23	To	[26] 20.39	m	m	[26] 20.39	m	m
24	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
25	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN o ELSE n/a - - SIP specific event notification extension.
c2:	IF A.4/20 THEN m ELSE n/a - - SIP specific event notification extension.
c3:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.
c4:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.
c5:	IF A.4/8A THEN m ELSE n/a - - authentication between UA and proxy.
c6:	IF A.4/6 THEN o ELSE n/a - - timestamping of requests.
c7:	IF A.3/1 AND A.4/25 THEN o ELSE n/a - - UE and private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c8:	IF A.4/25 THEN o ELSE n/a - - private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c9:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c10:	IF A.4/32 THEN m ELSE n/a - - the P-Called-Party-ID extension.
c11:	IF A.4/33 THEN o ELSE n/a - - the P-Visited-Network-ID extension.
c12:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.
c13:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.
c14:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.
c15:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.
c16:	IF A.4/36 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c17:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.
c18:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c19:	IF A.4/37 THEN o ELSE n/a - - security mechanism agreement for the session initiation protocol (note 2).
c20:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c21:	IF A.4/38 THEN o ELSE n/a - - the Reason header field for the session initiation protocol.
c22:	IF A.4/40 THEN o ELSE n/a - - caller preferences for the session initiation protocol.
c23:	IF A.4/43 THEN m ELSE n/a - - the SIP Referred-By Mechanism.
NOTE 1: The strength of this requirement in RFC 3455 [52] is SHOULD NOT, rather than MUST NOT.	
NOTE 2: Support of this header in this method is dependent on the security mechanism and the security architecture which is implemented. Use of this header in this method is not appropriate to the security mechanism defined by 3GPP TS 33.203 [19].	

Prerequisite A.5/16 - - REFER request

Table A.106: Supported message bodies within the REFER request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.5/17 - - REFER response

Prerequisite: A.6/1 - - 100 (Trying)

Table A.107: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	n/a	n/a	[26] 20.8	m	m
2	Content-Length	[26] 20.14	n/a	n/a	[26] 20.14	m	m
3	Cseq	[26] 20.16	n/a	n/a	[26] 20.16	m	m
4	Date	[26] 20.17	n/a	n/a	[26] 20.17	m	m
5	From	[26] 20.20	n/a	n/a	[26] 20.20	m	m
6	To	[26] 20.39	n/a	n/a	[26] 20.39	m	m
7	Via	[26] 20.42	n/a	n/a	[26] 20.42	m	m

Prerequisite A.5/17 - - REFER response

Table A.108: Supported headers within the REFER response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
1A	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
2	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
3	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
4	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
5	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
6	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
7	Date	[26] 20.17	c1	c1	[26] 20.17	m	m
8	From	[26] 20.20	m	m	[26] 20.20	m	m
9	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
10	Organization	[26] 20.25	o	o	[26] 20.25	o	o
10A	P-Access-Network-Info	[52] 4.4	c5	c6	[52] 4.4	c5	c7
10B	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c3	c3
10C	P-Charging-Function-Addresses	[52] 4.5	c10	c11	[52] 4.5	c10	c11
10D	P-Charging-Vector	[52] 4.6	c8	c9	[52] 4.6	c8	c9
10E	P-Preferred-Identity	[34] 9.2	c3	x	[34] 9.2	n/a	n/a
10F	Privacy	[33] 4.2	c4	c4	[33] 4.2	c4	c4
10G	Require	[26] 20.32	m	m	[26] 20.32	m	m
10H	Server	[26] 20.35	o	o	[26] 20.35	o	o
11	Timestamp	[26] 20.38	m	m	[26] 20.38	c2	c2
12	To	[26] 20.39	m	m	[26] 20.39	m	m
12A	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
13	Via	[26] 20.42	m	m	[26] 20.42	m	m
14	Warning	[26] 20.43	o (note)	o	[26] 20.43	o	o
c1:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.						
c2:	IF A.4/6 THEN m ELSE n/a - - timestamping of requests.						
c3:	IF A.4/25 THEN o ELSE n/a - - private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c4:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c5:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.						
c6:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.						
c7:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.						
c8:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.						
c9:	IF A.4/36 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c10:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c11:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
NOTE:	For a 606 (Not Acceptable Here) response, this status is RECOMMENDED rather than OPTIONAL.						

Prerequisite A.5/17 - - REFER response

Prerequisite: A.6/7 - - 202 (Accepted)

Table A.109: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Authentication-Info	[26] 20.6	c1	c1	[26] 20.6	c2	c2
3	Contact	[26] 20.10	m	m	[26] 20.10	m	m
5	Record-Route	[26] 20.30	m	m	[26] 20.30	m	m
8	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/7 THEN o ELSE n/a - - authentication between UA and UA.						
c2:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.						

Prerequisite A.5/17 - - REFER response

Prerequisite: A.6/8 OR A.6/9 OR A.6/10 OR A.6/11 OR A.6/12 OR A.6/35 - - 3xx or 485 (Ambiguous)

Table A.110: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Contact	[26] 20.10	o (note)	o	[26] 20.10	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m

NOTE: The strength of this requirement is RECOMMENDED rather than OPTIONAL.

Prerequisite A.5/17 - - REFER response

Prerequisite: A.6/14 - - 401 (Unauthorized)

Table A.111: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m
10	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	m	m

c1: IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.

Prerequisite A.5/17 - - REFER response

Prerequisite: A.6/17 OR A.6/23 OR A.6/30 OR A.6/36 OR A.6/42 OR A.6/45 OR A.6/50 OR A.6/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.112: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
6	Retry-After	[26] 20.33	o	o	[26] 20.33	o	o
8	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/17 - - REFER response

Prerequisite: A.6/18 - - 405 (Method Not Allowed)

Table A.113: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Allow	[26] 20.5	m	m	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
6	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/17 - - REFER response

Prerequisite: A.6/20 - - 407 (Proxy Authentication Required)

Table A.114: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m
8	WWW-Authenticate	[26] 20.44	o	o	[26] 20.44	o	o
c1:	IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.						

Prerequisite A.5/17 - - REFER response

Prerequisite: A.6/25 - - 415 (Unsupported Media Type)

Table A.115: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o.1	o.1	[26] 20.1	m	m
2	Accept-Encoding	[26] 20.2	o.1	o.1	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o.1	o.1	[26] 20.3	m	m
3A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
8	Supported	[26] 20.37	m	m	[26] 20.37	m	m
o.1	At least one of these capabilities is supported.						

Prerequisite A.5/17 - - REFER response

Prerequisite: A.6/27 - - 420 (Bad Extension)

Table A.116: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m
8	Unsupported	[26] 20.40	m	m	[26] 20.40	m	m

Prerequisite A.5/17 - - REFER response

Prerequisite: A.6/28 OR A.6/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.116A: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	x	x	[48] 2	c1	c1
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						

Prerequisite A.5/17 - - REFER response

Prerequisite: A.6/34 - - 484 (Address Incomplete)

Table A.117: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/17 - - REFER response

Table A.118: Supported message bodies within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.1.4.12 REGISTER method

Prerequisite A.5/18 - - REGISTER request

Table A.119: Supported headers within the REGISTER request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o	o	[26] 20.1	m	m
2	Accept-Encoding	[26] 20.2	o	o	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o	o	[26] 20.3	m	m
3A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Allow-Events	[28] 7.2.2	c1	c1	[28] 7.2.2	c1	c1
5	Authorization	[26] 20.7, [49]	c2	o	[26] 20.7, [49]	m	c22
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
7	Call-Info	[26] 20.9	o	o	[26] 20.9	o	o
8	Contact	[26] 20.10	o	o	[26] 20.10	m	m
9	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
10	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
11	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
12	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
13	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
14	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
15	Date	[26] 20.17	c3	c3	[26] 20.17	m	m
16	Expires	[26] 20.19	o	o	[26] 20.19	m	m
17	From	[26] 20.20	m	m	[26] 20.20	m	m
18	Max-Forwards	[26] 20.22	m	m	[26] 20.22	n/a	n/a
19	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
20	Organization	[26] 20.25	o	o	[26] 20.25	o	o
20A	P-Access-Network-Info	[52] 4.4	c12	c13	[52] 4.4	c12	c14
20B	P-Charging-Function-Addresses	[52] 4.5	c17	c18	[52] 4.5	c17	c18
20C	P-Charging-Vector	[52] 4.6	c15	c16	[52] 4.6	c15	c16
20D	P-Visited-Network-ID	[52] 4.3	x (note 2)	x	[52] 4.3	c10	c11
20E	Path	[35] 4	c4	c5	[35] 4	m	c6
20F	Privacy	[33] 4.2	c9	n/a	[33] 4.2	c9	n/a
21	Proxy-Authorization	[26] 20.28	c8	c8	[26] 20.28	n/a	n/a
22	Proxy-Require	[26] 20.29	o	o (note 1)	[26] 20.29	n/a	n/a
22A	Reason	[34A] 2	c23	c23	[34A] 2	c23	c23
22B	Referred-By	[59] 3	c25	c25	[59] 3	c26	c26
22C	Request-Disposition	[56B] 9.1	c24	c24	[56B] 9.1	n/a	n/a
23	Require	[26] 20.32	o	o	[26] 20.32	m	m
24	Route	[26] 20.34	o	n/a	[26] 20.34	n/a	n/a
24A	Security-Client	[48] 2.3.1	c19	c20	[48] 2.3.1	n/a	n/a
24B	Security-Verify	[48] 2.3.1	c20	c20	[48] 2.3.1	c21	n/a
25	Supported	[26] 20.37	o	o	[26] 20.37	m	m
26	Timestamp	[26] 20.38	m	m	[26] 20.38	c7	c7
27	To	[26] 20.39	m	m	[26] 20.39	m	m
28	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
29	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN m ELSE n/a -- SIP specific event notification extension.
c2:	IF A.4/8 THEN m ELSE n/a -- authentication between UA and registrar.
c3:	IF A.4/11 THEN o ELSE n/a -- insertion of date in requests and responses.
c4:	IF A.4/24 THEN o ELSE n/a -- session initiation protocol extension header field for registering non-adjacent contacts.
c5:	IF A.4/24 THEN x ELSE n/a -- session initiation protocol extension header field for registering non-adjacent contacts.
c6:	IF A.3/4 THEN m ELSE n/a -- S-CSCF.
c7:	IF A.4/6 THEN m ELSE n/a -- timestamping of requests.
c8:	IF A.4/8A THEN m ELSE n/a -- authentication between UA and proxy.
c9:	IF A.4/26 THEN o ELSE n/a -- a privacy mechanism for the Session Initiation Protocol (SIP).
c10:	IF A.4/33 THEN o ELSE n/a -- the P-Visited-Network-ID extension.
c11:	IF A.4/33 THEN m ELSE n/a -- the P-Visited-Network-ID extension.
c12:	IF A.4/34 THEN o ELSE n/a -- the P-Access-Network-Info header extension.
c13:	IF A.4/34 AND (A.3/1 OR A.3/4) THEN o ELSE n/a -- the P-Access-Network-Info header extension and UE or S-CSCF (note 4).
c14:	IF A.4/34 AND (A.3/4 OR A.3/7A) THEN m ELSE n/a -- the P-Access-Network-Info header extension and S-CSCF or AS acting as terminating UA.
c15:	IF A.4/36 THEN o ELSE n/a -- the P-Charging-Vector header extension.
c16:	IF A.4/36 OR A.3/4 THEN m ELSE n/a -- the P-Charging-Vector header extension (including S-CSCF as registrar).
c17:	IF A.4/35 THEN o ELSE n/a -- the P-Charging-Function-Addresses header extension.
c18:	IF A.4/35 OR A.3/4 THEN m ELSE n/a -- the P-Charging-Function-Addresses header extension (including S-CSCF as registrar).
c19:	IF A.4/37 THEN o ELSE n/a -- security mechanism agreement for the session initiation protocol (note 3).
c20:	IF A.4/37 THEN m ELSE n/a -- security mechanism agreement for the session initiation protocol.
c21:	IF A.4/37 AND A.4/2 THEN m ELSE n/a -- security mechanism agreement for the session initiation protocol and registrar.
c22:	IF A.3/4 THEN m ELSE n/a -- S-CSCF.
c23:	IF A.4/38 THEN o ELSE n/a -- the Reason header field for the session initiation protocol.
c24:	IF A.4/40 THEN o ELSE n/a -- caller preferences for the session initiation protocol.
c25:	IF A.4/43 THEN m ELSE n/a -- the SIP Referred-By mechanism.
c26:	IF A.4/43 THEN o ELSE n/a -- the SIP Referred-By mechanism.
NOTE 1:	No distinction has been made in these tables between first use of a request on a From/To/Call-ID combination, and the usage in a subsequent one. Therefore the use of "o" etc. above has been included from a viewpoint of first usage.
NOTE 2:	The strength of this requirement in RFC 3455 [52] is SHOULD NOT, rather than MUST NOT.
NOTE 3:	Support of this header in this method is dependent on the security mechanism and the security architecture which is implemented.
NOTE 4:	Refere to subclause 5.1.1.2 for information on when the UE sets the P-Access-Network-Info header.

Prerequisite A.5/18 -- REGISTER request

Table A.120: Supported message bodies within the REGISTER request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.5/19 - - REGISTER response

Prerequisite: A.6/1 - - 100 (Trying)

Table A.121: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	n/a	n/a	[26] 20.8	m	m
2	Content-Length	[26] 20.14	n/a	n/a	[26] 20.14	m	m
3	Cseq	[26] 20.16	n/a	n/a	[26] 20.16	m	m
4	Date	[26] 20.17	n/a	n/a	[26] 20.17	m	m
5	From	[26] 20.20	n/a	n/a	[26] 20.20	m	m
6	To	[26] 20.39	n/a	n/a	[26] 20.39	m	m
7	Via	[26] 20.42	n/a	n/a	[26] 20.42	m	m

Prerequisite A.5/19 - - REGISTER response

Table A.122: Supported headers within the REGISTER response - all status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
1A	Call-Info	[26] 20.9	o	o	[26] 20.9	o	o
2	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
3	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
4	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	c1	c1	[26] 20.17	m	m
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
11	Organization	[26] 20.25	o	o	[26] 20.25	o	o
11A	P-Access-Network-Info	[52] 4.4	c3	n/a	[52] 4.4	c3	n/a
11B	P-Charging-Function-Addresses	[52] 4.5	c6	c7	[52] 4.5	c6	c7
11C	P-Charging-Vector	[52] 4.6	c4	c5	[52] 4.6	c4	c5
11D	Privacy	[33] 4.2	c2	n/a	[33] 4.2	c2	n/a
11E	Require	[26] 20.32	m	m	[26] 20.32	m	m
11F	Server	[26] 20.35	o	o	[26] 20.35	o	o
12	Timestamp	[26] 20.38	c2	c2	[26] 20.38	m	m
13	To	[26] 20.39	m	m	[26] 20.39	m	m
13A	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
14	Via	[26] 20.42	m	m	[26] 20.42	m	m
15	Warning	[26] 20.43	o (note)	o	[26] 20.43	o	o
c1:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.						
c2:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c3:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.						
c4:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.						
c5:	IF A.4/36 OR A.3/4 THEN m ELSE n/a - - the P-Charging-Vector header extension (including S-CSCF as registrar).						
c6:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c7:	IF A.4/35 OR A.3/4 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension (including S-CSCF as registrar).						
NOTE:	For a 606 (Not Acceptable Here) response, this status is RECOMMENDED rather than OPTIONAL.						

Prerequisite A.5/19 - - REGISTER response

Prerequisite: A.6/6 - - 2xx

Table A.123: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o		[26] 20.1	o	
1A	Accept-Encoding	[26] 20.2	o	o	[26] 20.2	m	m
1B	Accept-Language	[26] 20.3	o	o	[26] 20.3	m	m
2	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Authentication-Info	[26] 20.6	c6	c6	[26] 20.6	c7	c7
5	Contact	[26] 20.10	o	o	[26] 20.10	m	m
5A	P-Associated-URI	[52] 4.1	c8	c9	[52] 4.1	c10	c11
6	Path	[35] 4	c3	c3	[35] 4	c4	c4
8	Service-Route	[38] 5	c5	c5	[38] 5	c5	c5
9	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF (A.3/4 AND A.4/2) THEN m ELSE n/a - - S-CSCF acting as registrar.						
c2:	IF A.3/4 OR A.3/1 THEN m ELSE n/a - - S-CSCF or UE.						
c3:	IF A.4/24 THEN m ELSE n/a - - session initiation protocol extension header field for registering non-adjacent contacts.						
c4:	IF A.4/24 THEN o ELSE n/a - - session initiation protocol extension header field for registering non-adjacent contacts.						
c5:	IF A.4/28 THEN m ELSE n/a - - session initiation protocol extension header field for service route discovery during registration.						
c6:	IF A.4/8 THEN o ELSE n/a - - authentication between UA and registrar.						
c7:	IF A.4/8 THEN m ELSE n/a - - authentication between UA and registrar.						
c8:	IF A.4/2 AND A.4/31 THEN m ELSE n/a - - P-Associated-URI header extension and registrar.						
c9:	IF A.3/1 AND A.4/31 THEN m ELSE n/a - - P-Associated-URI header extension and S-CSCF.						
c10:	IF A.4/31 THEN o ELSE n/a - - P-Associated-URI header extension.						
c11:	IF A.4/31 AND A.3/1 THEN m ELSE n/a - - P-Associated-URI header extension and UE.						

Prerequisite A.5/19 - - REGISTER response

Prerequisite: A.6/8 OR A.6/9 OR A.6/10 OR A.6/11 OR A.6/12 OR A.6/35 - - 3xx or 485 (Ambiguous)

Table A.124: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Contact	[26] 20.10	o (note)	o	[26] 20.10	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
8	Supported	[26] 20.37	m	m	[26] 20.37	m	m
NOTE:	The strength of this requirement is RECOMMENDED rather than OPTIONAL.						

Prerequisite A.5/19 - - REGISTER response

Prerequisite: A.6/14 - - 401 (Unauthorized)

Table A.125: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Proxy-Authenticate	[26] 20.27	c1	x	[26] 20.27	c1	x
6	Security-Server	[48] 2	x	x	[48] 2	n/a	c2
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m
10	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	m	m
c1:		IF A.5/8 THEN m ELSE n/a - - support of authentication between UA and UA.					
c2:		IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.					

Prerequisite A.5/19 - - REGISTER response

Prerequisite: A.6/17 OR A.6/23 OR A.6/30 OR A.6/36 OR A.6/42 OR A.6/45 OR A.6/50 OR A.6/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.126: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
6	Retry-After	[26] 20.33	o	o	[26] 20.33	o	o
8	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/19 - - REGISTER response

Prerequisite: A.6/18 - - 405 (Method Not Allowed)

Table A.127: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Allow	[26] 20.5	m	m	[26] 20.5	m	m
4	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
8	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/19 - - REGISTER response

Prerequisite: A.6/20 - - 407 (Proxy Authentication Required)

Table A.128: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
5	Proxy-Authenticate	[26] 20.27	c1	x	[26] 20.27	c1	x
8	Supported	[26] 20.37	m	m	[26] 20.37	m	m
9	WWW-Authenticate	[26] 20.44	o	o	[26] 20.44	o	o
c1:		IF A.5/8 THEN m ELSE n/a - - support of authentication between UA and UA.					

Prerequisite A.5/19 - - REGISTER response

Prerequisite: A.6/25 - - 415 (Unsupported Media Type)

Table A.129: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o.1	o.1	[26] 20.1	m	m
2	Accept-Encoding	[26] 20.2	o.1	o.1	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o.1	o.1	[26] 20.3	m	m
4	Allow	[26] 20.5	o	o	[26] 20.5	m	m
5	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
9	Supported	[26] 20.37	m	m	[26] 20.37	m	m
o.1		At least one of these capabilities is supported.					

Prerequisite A.5/19 - - REGISTER response

Prerequisite: A.6/27 - - 420 (Bad Extension)

Table A.130: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m
8	Unsupported	[26] 20.40	m	m	[26] 20.40	m	m

Prerequisite A.5/19 - - REGISTER response

Prerequisite: A.6/28 OR A.6/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.130A: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	c2	c2	[48] 2	c1	c1
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:		IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.					
c2:		IF A.4/37 AND A.4/2 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol and registrar.					

Prerequisite A.5/19 - - REGISTER response

Prerequisite: A.6/29 - - 423 (Interval Too Brief)

Table A.131: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o		[26] 20.18	o	
5	Min-Expires	[26] 20.23	m	m	[26] 20.23	m	m
8	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/19 - - REGISTER response

Prerequisite: A.6/34 - - 484 (Address Incomplete)

Table A.132: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/19 - - REGISTER response

Table A.133: Supported message bodies within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.1.4.13 SUBSCRIBE method

Prerequisite A.5/20 - - SUBSCRIBE request

Table A.134: Supported headers within the SUBSCRIBE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o	o	[26] 20.1	m	m
1A	Accept-Contact	[56B] 9.2	c22	c22	[56B] 9.2	n/a	n/a
2	Accept-Encoding	[26] 20.2	o	o	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o	o	[26] 20.3	m	m
3A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
4	Allow-Events	[28] 7.2.2	c1	c1	[28] 7.2.2	c2	c2
5	Authorization	[26] 20.7	c3	c3	[26] 20.7	c3	c3
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
6A	Contact	[26] 20.10	m	m	[26] 20.10	m	m
7	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
8	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
9	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
10	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
11	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
12	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
13	Date	[26] 20.17	c4	c4	[26] 20.17	m	m
14	Event	[28] 7.2.1	m	m	[28] 7.2.1	m	m
15	Expires	[26] 20.19	o (note 1)	o (note 1)	[26] 20.19	m	m
16	From	[26] 20.20	m	m	[26] 20.20	m	m
17	Max-Forwards	[26] 20.22	m	m	[26] 20.22	n/a	n/a
18	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
18A	Organization	[26] 20.25	o	o	[26] 20.25	o	o
18B	P-Access-Network-Info	[52] 4.4	c12	c13	[52] 4.4	c12	c14
18C	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c6	c6
18D	P-Called-Party-ID	[52] 4.2	x	x	[52] 4.2	c10	c10
18E	P-Charging-Function-Addresses	[52] 4.5	c17	c18	[52] 4.5	c17	c18
18F	P-Charging-Vector	[52] 4.6	c15	c16	[52] 4.6	c15	c16
18G	P-Preferred-Identity	[34] 9.2	c6	c7	[34] 9.2	n/a	n/a
18H	P-Visited-Network-ID	[52] 4.3	x (note 2)	x	[52] 4.3	c11	n/a
18I	Privacy	[33] 4.2	c9	c9	[33] 4.2	c9	c9
19	Proxy-Authorization	[26] 20.28	c5	c5	[26] 20.28	n/a	n/a
20	Proxy-Require	[26] 20.29	o	n/a	[26] 20.29	n/a	n/a
20A	Reason	[34A] 2	c21	c21	[34A] 2	c21	c21
21	Record-Route	[26] 20.30	n/a	n/a	[26] 20.30	m	m
21A	Referred-By	[59] 3	c23	c23	[59] 3	c24	c24
21B	Reject-Contact	[56B] 9.2	c22	c22	[56B] 9.2	n/a	n/a
21C	Request-Disposition	[56B] 9.1	c22	c22	[56B] 9.1	n/a	n/a
22	Require	[26] 20.32	o	o	[26] 20.32	m	m
23	Route	[26] 20.34	m	m	[26] 20.34	n/a	n/a
23A	Security-Client	[48] 2.3.1	c19	c19	[48] 2.3.1	n/a	n/a
23B	Security-Verify	[48] 2.3.1	c20	c20	[48] 2.3.1	n/a	n/a
24	Supported	[26] 20.37	o	o	[26] 20.37	m	m
25	Timestamp	[26] 20.38	c8	c8	[26] 20.38	m	m
26	To	[26] 20.39	m	m	[26] 20.39	m	m
27	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
28	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN o ELSE n/a - - SIP specific event notification extension.
c2:	IF A.4/20 THEN m ELSE n/a - - SIP specific event notification extension.
c3:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.
c4:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.
c5:	IF A.4/8A THEN m ELSE n/a - - authentication between UA and proxy.
c6:	IF A.4/25 THEN o ELSE n/a - - private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c7:	IF A.3/1 AND A.4/25 THEN o ELSE n/a - - UE and private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c8:	IF A.4/6 THEN o ELSE n/a - - timestamping of requests.
c9:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c10:	IF A.4/32 THEN o ELSE n/a - - the P-Called-Party-ID extension.
c11:	IF A.4/33 THEN o ELSE n/a - - the P-Visited-Network-ID extension.
c12:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.
c13:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.
c14:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.
c15:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.
c16:	IF A.4/36 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c17:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.
c18:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c19:	IF A.4/37 THEN o ELSE n/a - - security mechanism agreement for the session initiation protocol (note 3).
c20:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c21:	IF A.4/38 THEN o ELSE n/a - - the Reason header field for the session initiation protocol.
c22:	IF A.4/40 THEN o ELSE n/a - - caller preferences for the session initiation protocol.
c23:	IF A.4/43 THEN m ELSE n/a - - the SIP Referred-By mechanism.
c24:	IF A.4/43 THEN o ELSE n/a - - the SIP Referred-By mechanism.
NOTE 1:	The strength of this requirement is RECOMMENDED rather than OPTIONAL.
NOTE 2:	The strength of this requirement in RFC 3455 [52] is SHOULD NOT, rather than MUST NOT.
NOTE 3:	Support of this header in this method is dependent on the security mechanism and the security architecture which is implemented. Use of this header in this method is not appropriate to the security mechanism defined by 3GPP TS 33.203 [19].

Prerequisite A.5/20 - - SUBSCRIBE request

Table A.135: Supported message bodies within the SUBSCRIBE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.5/21 - - SUBSCRIBE response

Table A.136: Supported headers within the SUBSCRIBE response - all status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
3	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
4	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	c1	c1	[26] 20.17	m	m
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
10A	Organization	[26] 20.25	o	o	[26] 20.25	o	o
10B	P-Access-Network-Info	[52] 4.4	c5	c6	[52] 4.4	c5	c7
10C	P-Asserted-Identity	[34] 9.1	n/a	n/a	[34] 9.1	c3	c3
10D	P-Charging-Function-Addresses	[52] 4.5	c10	c11	[52] 4.5	c10	c11
10E	P-Charging-Vector	[52] 4.6	c8	c9	[52] 4.6	c8	c9
10F	P-Preferred-Identity	[34] 9.2	c3	x	[34] 9.2	n/a	n/a
10G	Privacy	[33] 4.2	c4	c4	[33] 4.2	c4	c4
10H	Require	[26] 20.32	m	m	[26] 20.32	m	m
10I	Server	[26] 20.35	o	o	[26] 20.35	o	o
11	Timestamp	[26] 20.38	m	m	[26] 20.38	c2	c2
12	To	[26] 20.39	m	m	[26] 20.39	m	m
12A	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
13	Via	[26] 20.42	m	m	[26] 20.42	m	m
14	Warning	[26] 20.43	o (note)	o	[26] 20.43	o	o
c1:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.						
c2:	IF A.4/6 THEN m ELSE n/a - - timestamping of requests.						
c3:	IF A.4/25 THEN o ELSE n/a - - private extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c4:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c5:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.						
c6:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.						
c7:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.						
c8:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.						
c9:	IF A.4/36 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c10:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c11:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
NOTE:	For a 606 (Not Acceptable Here) response, this status is RECOMMENDED rather than OPTIONAL.						

Prerequisite A.5/21 - - SUBSCRIBE response

Prerequisite: A.6/6 and A.6/7 - - 2xx

Table A.137: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Authentication-Info	[26] 20.6	c1	c1	[26] 20.6	c2	c2
1A	Contact	[26] 20.10	m	m	[26] 20.10	m	m
2	Expires	[26] 20.19	m	m	[26] 20.19	m	m
4	Require	[26] 20.32	m	m	[26] 20.32	m	m
6	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/7 THEN o ELSE n/a - - authentication between UA and UA.						
c2:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.						

Prerequisite A.5/21 - - SUBSCRIBE response

Prerequisite: A.6/8 OR A.6/9 OR A.6/10 OR A.6/11 OR A.6/12 OR A.6/35 - - 3xx or 485 (Ambiguous)

Table A.138: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Contact	[26] 20.10	m (note)	m	[26] 20.10	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
NOTE: The strength of this requirement is RECOMMENDED rather than MANDATORY for a 485 response.							

Prerequisite A.5/21 - - SUBSCRIBE response

Prerequisite: A.6/14 - - 401 (Unauthorized)

Table A.139: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
2	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
8	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	m	m
c1: IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.							

Prerequisite A.5/21 - - SUBSCRIBE response

Prerequisite: A.6/17 OR A.6/23 OR A.6/30 OR A.6/36 OR A.6/42 OR A.6/50 OR A.6/51 - - 404, 413, 480, 486, 500, 600, 603

Table A.140: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Retry-After	[26] 20.33	o		[26] 20.33	o	
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/21 - - SUBSCRIBE response

Prerequisite: A.6/18 - - 405 (Method Not Allowed)

Table A.141: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/21 - - SUBSCRIBE response

Prerequisite: A.6/20 - - 407 (Proxy Authentication Required)

Table A.142: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
2	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
6	WWW-Authenticate	[26] 20.44	o	o	[26] 20.44	o	o
c1:	IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.						

Prerequisite A.5/21 - - SUBSCRIBE response

Prerequisite A.6/25 - - 415 (Unsupported Media Type)

Table A.143: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o.1	o.1	[26] 20.1	m	m
2	Accept-Encoding	[26] 20.2	o.1	o.1	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o.1	o.1	[26] 20.3	m	m
4	Allow	[26] 20.5	o	o	[26] 20.5	m	m
6	Server	[26] 20.35	o	o	[26] 20.35	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m
o.1	At least one of these capabilities is supported.						

Prerequisite A.5/21 - - SUBSCRIBE response

Prerequisite: A.6/27 - - 420 (Bad Extension)

Table A.144: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
5	Unsupported	[26] 20.40	m	m	[26] 20.40	m	m

Prerequisite A.5/21 - - SUBSCRIBE response

Prerequisite: A.6/28 OR A.6/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.144A: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	x	x	[48] 2	c1	c1
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						

Prerequisite A.5/21 - - SUBSCRIBE response

Prerequisite: A.6/29 - - 423 (Interval Too Brief)

Table A.145: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
2	Min-Expires	[26] 20.23	m	m	[26] 20.23	m	m
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/21 - - SUBSCRIBE response

Prerequisite: A.6/34 - - 484 (Address Incomplete)

Table A.146: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/21 - - SUBSCRIBE response

Prerequisite: A.6/39 - - 489 (Bad Event)

Table A.147: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o

Prerequisite A.5/21 - - SUBSCRIBE response

Prerequisite: A.6/45 - - 503 (Service Unavailable)

Table A.148: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	o	o	[26] 20.5	m	m
1	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Retry-After	[26] 20.33	o	o	[26] 20.33	o	m
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/21 - - SUBSCRIBE response

Table A.149: Supported message bodies within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.1.4.14 UPDATE method

Prerequisite A.5/22 - - UPDATE request

Table A.150: Supported headers within the UPDATE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o	o	[26] 20.1	m	m
1A	Accept-Contact	[56B] 9.2	c20	c20	[56B] 9.2	n/a	n/a
2	Accept-Encoding	[26] 20.2	o	o	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o	o	[26] 20.3	m	m
4	Allow	[26] 20.5	o	o	[26] 20.5	m	m
5	Allow-Events	[28] 7.2.2	c2	c2	[28] 7.2.2	c3	c3
6	Authorization	[26] 20.7	c4	c4	[26] 20.7	c4	c4
7	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
8	Call-Info	[26] 20.9	o	o	[26] 20.9	o	o
9	Contact	[26] 20.10	m	m	[26] 20.10	m	m
10	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
11	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
12	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
13	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
14	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
15	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
16	Date	[26] 20.17	c5	c5	[26] 20.17	m	m
17	From	[26] 20.20	m	m	[26] 20.20	m	m
18	Max-Forwards	[26] 20.22	m	m	[26] 20.22	n/a	n/a
19	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
19A	Min-SE	[58] 5	c21	c21	[58] 5	c21	c21
20	Organization	[26] 20.25	o	o	[26] 20.25	o	o
20A	P-Access-Network-Info	[52] 4.4	c11	c12	[52] 4.4	c11	c13
20B	P-Charging-Function-Addresses	[52] 4.5	c16	c17	[52] 4.5	c16	c17
20C	P-Charging-Vector	[52] 4.6	c14	c15	[52] 4.6	c14	c15
20D	Privacy	[33] 4.2	c6	n/a	[33] 4.2	c6	n/a
21	Proxy-Authorization	[26] 20.28	c10	c10	[26] 20.28	n/a	n/a
22	Proxy-Require	[26] 20.29	o	n/a	[26] 20.29	n/a	n/a
22A	Reason	[34A] 2	c8	c8	[34A] 2	c8	c8
23	Record-Route	[26] 20.30	n/a	n/a	[26] 20.30	n/a	n/a
23A	Referred-By	[59] 3	c22	c22	[59] 3	c23	c23
23B	Reject-Contact	[56B] 9.2	c20	c20	[56B] 9.2	n/a	n/a
23C	Request-Disposition	[56B] 9.1	c20	c20	[56B] 9.1	n/a	n/a
24	Require	[26] 20.32	o	o	[26] 20.32	m	m
25	Route	[26] 20.34	m	m	[26] 20.34	n/a	n/a
25A	Security-Client	[48] 2.3.1	c18	c18	[48] 2.3.1	n/a	n/a
25B	Security-Verify	[48] 2.3.1	c19	c19	[48] 2.3.1	n/a	n/a
25C	Session-Expires	[58] 4	c21	c21	[58] 4	c21	c21
26	Supported	[26] 20.37	o	o	[26] 20.37	m	m
27	Timestamp	[26] 20.38	c9	c9	[26] 20.38	m	m
28	To	[26] 20.39	m	m	[26] 20.39	m	m
29	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
30	Via	[26] 20.42	m	m	[26] 20.42	m	m

c2:	IF A.4/20 THEN o ELSE n/a - - SIP specific event notification extension.
c3:	IF A.4/20 THEN m ELSE n/a - - SIP specific event notification extension.
c4:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.
c5:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.
c6:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c8:	IF A.4/38 THEN o ELSE n/a - - the Reason header field for the session initiation protocol.
c9:	IF A.4/6 THEN o ELSE n/a - - timestamping of requests.
c10:	IF A.4/8A THEN m ELSE n/a - - authentication between UA and proxy.
c11:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.
c12:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.
c13:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.
c14:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.
c15:	IF A.4/36 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c16:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.
c17:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c18:	IF A.4/37 THEN o ELSE n/a - - security mechanism agreement for the session initiation protocol (note).
c20:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c19:	IF A.4/40 THEN o ELSE n/a - - caller preferences for the session initiation protocol.
c21:	IF A.4/42 THEN m ELSE n/a - - the SIP session timer.
c22:	IF A.4/43 THEN m ELSE n/a - - the SIP Referred-By mechanism.
c23:	IF A.4/43 THEN o ELSE n/a - - the SIP Referred-By mechanism.
NOTE:	Support of this header in this method is dependent on the security mechanism and the security architecture which is implemented. Use of this header in this method is not appropriate to the security mechanism defined by 3GPP TS 33.203 [19].

Prerequisite A.5/22 - - UPDATE request

Table A.151: Supported message bodies within the UPDATE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.5/23 - - UPDATE response

Table A.152: Supported headers within the UPDATE response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
1A	Call-Info	[26] 20.9	o	o	[26] 20.9	o	o
2	Content-Disposition	[26] 20.11	o	o	[26] 20.11	m	m
3	Content-Encoding	[26] 20.12	o	o	[26] 20.12	m	m
4	Content-Language	[26] 20.13	o	o	[26] 20.13	m	m
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	m	m
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	c1	c1	[26] 20.17	m	m
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	o	o	[26] 20.24	m	m
10A	Organization	[26] 20.25	o	o	[26] 20.25	o	o
10B	P-Access-Network-Info	[52] 4.4	c4	c5	[52] 4.4	c4	c6
10C	P-Charging-Function-Addresses	[52] 4.5	c9	c10	[52] 4.5	c9	c10
10D	P-Charging-Vector	[52] 4.6	c7	c8	[52] 4.6	c7	c8
10E	Privacy	[33] 4.2	c3	n/a	[33] 4.2	c3	n/a
10F	Require	[26] 20.31	m	m	[26] 20.31	m	m
10G	Server	[26] 20.35	o	o	[26] 20.35	o	o
11	Timestamp	[26] 20.38	m	m	[26] 20.38	c2	c2
12	To	[26] 20.39	m	m	[26] 20.39	m	m
12A	User-Agent	[26] 20.41	o	o	[26] 20.41	o	o
13	Via	[26] 20.42	m	m	[26] 20.42	m	m
14	Warning	[26] 20.43	o (note)	o	[26] 20.43	o	o
c1:	IF A.4/11 THEN o ELSE n/a - - insertion of date in requests and responses.						
c2:	IF A.4/6 THEN m ELSE n/a - - timestamping of requests.						
c3:	IF A.4/26 THEN o ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c4:	IF A.4/34 THEN o ELSE n/a - - the P-Access-Network-Info header extension.						
c5:	IF A.4/34 AND A.3/1 THEN m ELSE n/a - - the P-Access-Network-Info header extension and UE.						
c6:	IF A.4/34 AND (A.3/7A OR A.3/7D) THEN m ELSE n/a - - the P-Access-Network-Info header extension and AS acting as terminating UA or AS acting as third-party call controller.						
c7:	IF A.4/36 THEN o ELSE n/a - - the P-Charging-Vector header extension.						
c8:	IF A.4/36 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c9:	IF A.4/35 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c10:	IF A.4/35 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
NOTE:	For a 606 (Not Acceptable Here) response, this status is RECOMMENDED rather than OPTIONAL.						

Prerequisite A.5/23 - - UPDATE response

Prerequisite: A.6/6 - - 2xx

Table A.153: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Accept	[26] 20.1	o	o	[26] 20.1	m	m
0B	Accept-Encoding	[26] 20.2	o	o	[26] 20.2	m	m
0C	Accept-Language	[26] 20.3	o	o	[26] 20.3	m	m
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Authentication-Info	[26] 20.6	c1	c1	[26] 20.6	c2	c2
3	Contact	[26] 20.10	m	m	[26] 20.10	m	m
4	Session-Expires	[58]	c3	c3	[58]	c3	c3
6	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/7 THEN o ELSE n/a - - authentication between UA and UA.						
c2:	IF A.4/7 THEN m ELSE n/a - - authentication between UA and UA.						
c3:	IF A.4/42 THEN m ELSE n/a - - the SIP session timer						

Prerequisite A.5/23 - - UPDATE response

Prerequisite: A.6/8 OR A.6/9 OR A.6/10 OR A.6/11 OR A.6/12 - - 3xx

Table A.154: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Contact	[26] 20.10	o	o	[26] 20.10	o	o
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/23 - - UPDATE response

Prerequisite: A.6/14 - - 401 (Unauthorized)

Table A.154A: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Proxy-Authenticate	[26] 20.27	o		[26] 20.27	o	
5	Supported	[26] 20.37	m	m	[26] 20.37	m	m
6	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	m	m
c1: IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.							

Prerequisite A.5/23 - - UPDATE response

Prerequisite: A.6/17 OR A.6/23 OR A.6/30 OR A.6/36 OR A.6/42 OR A.6/45 OR A.6/50 OR A.6/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.155: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
5	Retry-After	[26] 20.33	o	o	[26] 20.33	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/23 - - UPDATE response

Prerequisite: A.6/18 - - 405 (Method Not Allowed)

Table A.156: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m

Prerequisite A.5/23 - - UPDATE response

Prerequisite: A.6/20 - - 407 (Proxy Authentication Required)

Table A.157: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
4	Proxy-Authenticate	[26] 20.27	c1	c1	[26] 20.27	c1	c1
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m
8	WWW-Authenticate	[26] 20.44	o	o	[26] 20.44	o	o
c1:	IF A.5/7 THEN m ELSE n/a - - support of authentication between UA and UA.						

Prerequisite A.5/23 - - UPDATE response

Prerequisite: A.6/25 - - 415 (Unsupported Media Type)

Table A.158: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	o.1	o.1	[26] 20.1	m	m
2	Accept-Encoding	[26] 20.2	o.1	o.1	[26] 20.2	m	m
3	Accept-Language	[26] 20.3	o.1	o.1	[26] 20.3	m	m
4	Allow	[26] 20.5	o	o	[26] 20.5	m	m
6	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
10	Supported	[26] 20.37	m	m	[26] 20.37	m	m
o.1	At least one of these capabilities is supported.						

Prerequisite A.5/23 - - UPDATE response

Prerequisite: A.6/27 - - 420 (Bad Extension)

Table A.159: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
6	Supported	[26] 20.37	m	m	[26] 20.37	m	m
7	Unsupported	[26] 20.40	m	m	[26] 20.40	m	m

Prerequisite A.5/23 - - UPDATE response

Prerequisite: A.6/28 OR A.6/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.159A: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	x	x	[48] 2	c1	c1
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						

Prerequisite A.5/23 - - UPDATE response

Prerequisite: A.6/35 - - 485 (Ambiguous)

Prerequisite A.5/23 - - UPDATE response

Prerequisite: A.6/28A - - 422 (Session Interval Too Small)

Table A.159B: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Min-SE	[58] 5	c1	c1	[58] 5	c1	c1
c1: IF A.4/42 THEN m ELSE n/a - - the SIP session timer.							

Table A.160: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Contact	[26] 20.10	o (note)	o	[26] 20.10	m	m
3	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
7	Supported	[26] 20.37	m	m	[26] 20.37	m	m
NOTE: The strength of this requirement is RECOMMENDED rather than OPTIONAL.							

Prerequisite A.5/23 - - UPDATE response

Table A.161: Supported message bodies within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.2 Proxy role

A.2.2.1 Introduction

This subclause contains the ICS proforma tables related to the proxy role. They need to be completed only for proxy implementations.

Prerequisite: A.2/2 - - proxy role

A.2.2.2 Major capabilities

Table A.162: Major capabilities

Item	Does the implementation support	Reference	RFC status	Profile status
	Capabilities within main protocol			
3	initiate session release?	[26] 16	x	c27
4	stateless proxy behaviour?	[26] 16.11	o.1	c28
5	stateful proxy behaviour?	[26] 16.2	o.1	c29
6	forking of initial requests?	[26] 16.1	c1	c31
7	support of indication of TLS connections in the Record-Route header on the upstream side?	[26] 16.7	o	n/a
8	support of indication TLS connections in the Record-Route header on the downstream side?	[26] 16.7	o	n/a
8A	authentication between UA and proxy?	[26] 20.28, 22.3	o	x
9	insertion of date in requests and responses?	[26] 20.17	o	o
10	suppression or modification of alerting information data?	[26] 20.4	o	o
11	reading the contents of the Require header before proxying the request or response?	[26] 20.32	o	o
12	adding or modifying the contents of the Require header before proxying the REGISTER request or response	[26] 20.32	o	m
13	adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER?	[26] 20.32	o	o
14	being able to insert itself in the subsequent transactions in a dialog (record-routing)?	[26] 16.6	o	c2
15	the requirement to be able to use separate URIs in the upstream direction and downstream direction when record routing?	[26] 16.7	c3	c3
16	reading the contents of the Supported header before proxying the response?	[26] 20.37	o	o
17	reading the contents of the Unsupported header before proxying the 420 response to a REGISTER?	[26] 20.40	o	m
18	reading the contents of the Unsupported header before proxying the 420 response to a method other than REGISTER?	[26] 20.40	o	o
19	the inclusion of the Error-Info header in 3xx - 6xx responses?	[26] 20.18	o	o
19A	reading the contents of the Organization header before proxying the request or response?	[26] 20.25	o	o
19B	adding or concatenating the Organization header before proxying the request or response?	[26] 20.25	o	o
19C	reading the contents of the Call-Info header before proxying the request or response?	[26] 20.25	o	o
19D	adding or concatenating the Call-Info header before proxying the request or response?	[26] 20.25	o	o
19E	delete Contact headers from 3xx responses prior to relaying the response?	[26] 20	o	o
	Extensions			

20	the SIP INFO method?	[25]	o	o
21	reliability of provisional responses in SIP?	[27]	o	i
22	the REFER method?	[36]	o	o
23	integration of resource management and SIP?	[30]	o	i
24	the SIP UPDATE method?	[29]	c4	i
26	SIP extensions for media authorization?	[31]	o	c7
27	SIP specific event notification	[28]	o	i
28	the use of NOTIFY to establish a dialog	[28] 4.2	o	n/a
29	Session Initiation Protocol Extension Header Field for Registering Non-Adjacent Contacts	[35]	o	c6
30	extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks	[34]	o	m
30A	act as first entity within the trust domain for asserted identity	[34]	c5	c8
30B	act as subsequent entity within trust network that can route outside the trust network	[34]	c5	c9
31	a privacy mechanism for the Session Initiation Protocol (SIP)	[33]	o	m
31A	request of privacy by the inclusion of a Privacy header	[33]	n/a	n/a
31B	application of privacy based on the received Privacy header	[33]	c10	c12
31C	passing on of the Privacy header transparently	[33]	c10	c13
31D	application of the privacy option "header" such that those headers which cannot be completely expunged of identifying information without the assistance of intermediaries are obscured?	[33] 5.1	x	x
31E	application of the privacy option "session" such that anonymization for the session(s) initiated by this message occurs?	[33] 5.2	n/a	n/a
31F	application of the privacy option "user" such that user level privacy functions are provided by the network?	[33] 5.3	n/a	n/a
31G	application of the privacy option "id" such that privacy of the network asserted identity is provided by the network?	[34] 7	c11	c12
32	Session Initiation Protocol Extension Header Field for Service Route Discovery During Registration	[38]	o	c30
33	a messaging mechanism for the Session Initiation Protocol (SIP)	[50]	o	m
34	Compressing the Session Initiation Protocol	[55]	o	c7
35	private header extensions to the session initiation protocol for the 3rd-Generation Partnership Project (3GPP)?	[52]	o	m
36	the P-Associated-URI header extension?	[52] 4.1	c14	c15
37	the P-Called-Party-ID header extension?	[52] 4.2	c14	c16
38	the P-Visited-Network-ID header extension?	[52] 4.3	c14	c17
39	reading, or deleting the P-Visited-Network-ID header before proxying the request or response?	[52] 4.3	c18	n/a
41	the P-Access-Network-Info header	[52] 4.4	c14	c19

	extension?			
42	act as first entity within the trust domain for access network information?	[52] 4.4	c20	c21
43	act as subsequent entity within trust network for access network information that can route outside the trust network?	[52] 4.4	c20	c22
44	the P-Charging-Function-Addresses header extension?	[52] 4.5	c14	m
44A	adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response?	[52] 4.6	c25	c26
45	the P-Charging-Vector header extension?	[52] 4.6	c14	m
46	adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response?	[52] 4.6	c23	c24
47	security mechanism agreement for the session initiation protocol?	[48]	o	c7
48	the Reason header field for the session initiation protocol	[34A]	o	o
49	an extension to the session initiation protocol for symmetric response routing	[56A]	o	x
50	caller preferences for the session initiation protocol?	[56B]	c33	c33
50A	the proxy-directive within caller-preferences?	[56B] 9.1	o.4	o.4
50B	the cancel-directive within caller-preferences?	[56B] 9.1	o.4	o.4
50C	the fork-directive within caller-preferences?	[56B] 9.1	o.4	c32
50D	the recurse-directive within caller-preferences?	[56B] 9.1	o.4	o.4
50E	the parallel-directive within caller-preferences?	[56B] 9.1	o.4	c32
50F	the queue-directive within caller-preferences?	[56B] 9.1	o.4	o.4
51	an event state publication extension to the session initiation protocol?	[70]	o	m
52	SIP session timer?	[58]	o	o
53	the SIP Referred-By mechanism?	[59]	o	o
54	the Session Initiation Protocol (SIP) "Replaces" header?	[60]	o	o
55	the Session Initiation Protocol (SIP) "Join" header?	[61]	o	o
56	the callee capabilities?	[62]	o	o

c1:	IF A.162/5 THEN o ELSE n/a - - stateful proxy behaviour.
c2:	IF A.3/2 OR A.3/3A OR A.3/4 THEN m ELSE o - - P-CSCF, I-CSCF(THIG) or S-CSCF.
c3:	IF (A.162/7 AND NOT A.162/8) OR (NOT A.162/7 AND A.162/8) THEN m ELSE IF A.162/14 THEN o ELSE n/a - - TLS interworking with non-TLS else proxy insertion.
c4:	IF A.162/23 THEN m ELSE o - - integration of resource management and SIP.
c5:	IF A.162/30 THEN o ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c6:	IF A.3/2 OR A.3/3A THEN m ELSE n/a - - P-CSCF or I-CSCF (THIG).
c7:	IF A.3/2 THEN m ELSE n/a - - P-CSCF.
c8:	IF A.3/2 AND A.162/30 THEN m ELSE n/a - - P-CSCF and extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c9:	IF A.3/2 AND A.162/30 THEN m ELSE IF A.3/7C AND A.162/30 THEN o ELSE n/a - - S-CSCF or AS acting as proxy and extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks (NOTE).
c10:	IF A.162/31 THEN o.2 ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c11:	IF A.162/31B THEN o ELSE x - - application of privacy based on the received Privacy header.
c12:	IF A.162/31 AND A.3/4 THEN m ELSE n/a - - S-CSCF.
c13:	IF A.162/31 AND (A.3/2 OR A.3/3 OR A.3/7C) THEN m ELSE n/a - - P-CSCF OR I-CSCF OR AS acting as a SIP proxy.
c14:	IF A.162/35 THEN o.3 ELSE n/a - - private header extensions to the session initiation protocol for the 3rd-Generation Partnership Project (3GPP).
c15:	IF A.162/35 AND (A.3/2 OR A.3/3) THEN m THEN o ELSE n/a - - private header extensions to the session initiation protocol for the 3rd-Generation Partnership Project (3GPP) and P-CSCF or I-CSCF.
c16:	IF A.162/35 AND (A.3/2 OR A.3/3 OR A.3/4) THEN m ELSE n/a - - private header extensions to the session initiation protocol for the 3rd-Generation Partnership Project (3GPP) and P-CSCF or I-CSCF or S-CSCF.
c17:	IF A.162/35 AND (A.3/2 OR A.3/3) THEN m ELSE n/a - - private header extensions to the session initiation protocol for the 3rd-Generation Partnership Project (3GPP) and P-CSCF or I-CSCF.
c18:	IF A.162/38 THEN o ELSE n/a - - the P-Visited-Network-ID header extension.
c19:	IF A.162/35 AND (A.3/2 OR A.3.3 OR A.3/4 OR A.3/7) THEN m ELSE n/a - - private header extensions to the session initiation protocol for the 3rd-Generation Partnership Project (3GPP) and P-CSCF, I-CSCF, S-CSCF, AS acting as a proxy.
c20:	IF A.162/41 THEN o ELSE n/a - - the P-Access-Network-Info header extension.
c21:	IF A.162/41 AND A.3/2 THEN m ELSE n/a - - the P-Access-Network-Info header extension and P-CSCF.
c22:	IF A.162/41 AND A.3/4 THEN m ELSE n/a - - the P-Access-Network-Info header extension and S-CSCF.
c23:	IF A.162/45 THEN o ELSE n/a - - the P-Charging-Vector header extension.
c24:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c25:	IF A.162/44 THEN o ELSE n/a - - the P-Charging-Function-Addresses header extension.
c26:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function Addresses header extension.
c27:	IF A.3/2 OR A.3/4 THEN m ELSE x - - P-CSCF or S-CSCF.
c28:	IF A.3/2 OR A.3/4 OR A.3/6 then m ELSE o - - P-CSCF or S-CSCF of MGCF.
c29:	IF A.3/2 OR A.3/4 OR A.3/6 then o ELSE m - - P-CSCF or S-CSCF of MGCF.
c30:	IF A.3/2 o ELSE i - - P-CSCF.
c31:	IF A.3/4 THEN m ELSE x - - S-CSCF.
c32:	IF A.3/4 THEN m ELSE o.4 - - S-CSCF.
c33:	IF A.162/50A OR A.162/50B OR A.162/50C OR A.162/50D OR A.162/50E OR A.162/50F THEN m ELSE n/a - - support of any directives within caller preferences for the session initiation protocol.
o.1:	It is mandatory to support at least one of these items.
o.2:	It is mandatory to support at least one of these items.
o.3:	It is mandatory to support at least one of these items.
o.4:	At least one of these capabilities is supported.
NOTE:	An AS acting as a proxy may be outside the trust domain, and therefore not able to support the capability for that reason; in this case it is perfectly reasonable for the header to be passed on transparently, as specified in the PDU parts of the profile.

A.2.2.3 PDUs

Table A.163: Supported methods

Item	PDU	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	ACK request	[26] 13	m	m	[26] 13	m	m
2	BYE request	[26] 16	m	m	[26] 16	m	m
3	BYE response	[26] 16	m	m	[26] 16	m	m
4	CANCEL request	[26] 16.10	m	m	[26] 16.10	m	m
5	CANCEL response	[26] 16.10	m	m	[26] 16.10	m	m
8	INVITE request	[26] 16	m	m	[26] 16	m	m
9	INVITE response	[26] 16	m	m	[26] 16	m	m
9A	MESSAGE request	[50] 4	c5	c5	[50] 7	c5	c5
9B	MESSAGE response	[50] 4	c5	c5	[50] 7	c5	c5
10	NOTIFY request	[28] 8.1.2	c3	c3	[28] 8.1.2	c3	c3
11	NOTIFY response	[28] 8.1.2	c3	c3	[28] 8.1.2	c3	c3
12	OPTIONS request	[26] 16	m	m	[26] 16	m	m
13	OPTIONS response	[26] 16	m	m	[26] 16	m	m
14	PRACK request	[27] 6	c6	c6	[27] 6	c6	c6
15	PRACK response	[27] 6	c6	c6	[27] 6	c6	c6
15A	PUBLISH request	[70] 11.1.1	c20	c20	[70] 11.1.1	c20	c20
15B	PUBLISH response	[70] 11.1.1	c20	c20	[70] 11.1.1	c20	c20
16	REFER request	[36] 3	c1	c1	[36] 3	c1	c1
17	REFER response	[36] 3	c1	c1	[36] 3	c1	c1
18	REGISTER request	[26] 16	m	m	[26] 16	m	m
19	REGISTER response	[26] 16	m	m	[26] 16	m	m
20	SUBSCRIBE request	[28] 8.1.1	c3	c3	[28] 8.1.1	c3	c3
21	SUBSCRIBE response	[28] 8.1.1	c3	c3	[28] 8.1.1	c3	c3
22	UPDATE request	[30] 7	c4	c4	[30] 7	c4	c4
23	UPDATE response	[30] 7	c4	c4	[30] 7	c4	c4
c1:	IF A.162/22 THEN m ELSE n/a - - the REFER method.						
c3:	IF A.162/27 THEN m ELSE n/a - - SIP specific event notification.						
c4:	IF A.162/24 THEN m ELSE n/a - - the SIP UPDATE method.						
c5:	IF A.162/33 THEN m ELSE n/a - - the SIP MESSAGE method.						
c6:	IF A.162/21 THEN m ELSE n/a - - reliability of provisional responses.						
c20:	IF A.4/51 THEN m ELSE n/a						

A.2.2.4 PDU parameters

A.2.2.4.1 Status-codes

Table A.164: Supported-status codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	100 (Trying)	[26] 21.1.1	c1	c1	[26] 21.1.1	c2	c2
2	180 (Ringing)	[26] 21.1.2	c3	c3	[26] 21.1.2	c3	c3
3	181 (Call Is Being Forwarded)	[26] 21.1.3	c3	c3	[26] 21.1.3	c3	c3
4	182 (Queued)	[26] 21.1.4	c3	c3	[26] 21.1.4	c3	c3
5	183 (Session Progress)	[26] 21.1.5	c3	c3	[26] 21.1.5	c3	c3
6	200 (OK)	[26] 21.2.1			[26] 21.2.1		
7	202 (Accepted)	[28] 8.3.1	c4	c4	[28] 8.3.1	c4	c4
8	300 (Multiple Choices)	[26] 21.3.1			[26] 21.3.1		
9	301 (Moved Permanently)	[26] 21.3.2			[26] 21.3.2		
10	302 (Moved Temporarily)	[26] 21.3.3			[26] 21.3.3		
11	305 (Use Proxy)	[26] 21.3.4			[26] 21.3.4		
12	380 (Alternative Service)	[26] 21.3.5			[26] 21.3.5		
13	400 (Bad Request)	[26] 21.4.1	m	m	[26] 21.4.1	i	i
14	401 (Unauthorized)	[26] 21.4.2			[26] 21.4.2		
15	402 (Payment Required)	[26] 21.4.3			[26] 21.4.3		
16	403 (Forbidden)	[26] 21.4.4			[26] 21.4.4		
17	404 (Not Found)	[26] 21.4.5			[26] 21.4.5		
18	405 (Method Not Allowed)	[26] 21.4.6			[26] 21.4.6		
19	406 (Not Acceptable)	[26] 21.4.7			[26] 21.4.7		
20	407 (Proxy Authentication Required)	[26] 21.4.8			[26] 21.4.8		
21	408 (Request Timeout)	[26] 21.4.9			[26] 21.4.9		
22	410 (Gone)	[26] 21.4.10			[26] 21.4.10		
22A	412 (Conditional Request Failed)	[70] 11.2.1	c20	c20	[70] 11.2.1	c20	c20
23	413 (Request Entity Too Large)	[26] 21.4.11			[26] 21.4.11		
24	414 (Request-URI Too Large)	[26] 21.4.12			[26] 21.4.12		
25	415 (Unsupported Media Type)	[26] 21.4.13			[26] 21.4.13		
26	416 (Unsupported URI Scheme)	[26] 21.4.14			[26] 21.4.14		
27	420 (Bad Extension)	[26] 21.4.15			[26] 21.4.15		
28	421 (Extension Required)	[26] 21.4.16			[26] 21.4.16		

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
28A	422 (Session Interval Too Small)	[58] 6	c8	c8	[58] 6	c8	c8
29	423 (Interval Too Brief)	[26] 21.4.17	c5	c5	[26] 21.4.17	c6	c6
29A	429 (Provide Referrer Identity)	[59] 5	c9	c9	[59] 5	c9	c9
30	480 (Temporarily not available)	[26] 21.4.18			[26] 21.4.18		
31	481 (Call /Transaction Does Not Exist)	[26] 21.4.19	m	m	[26] 21.4.19	i	i
32	482 (Loop Detected)	[26] 21.4.20			[26] 21.4.20		
33	483 (Too Many Hops)	[26] 21.4.21			[26] 21.4.21		
34	484 (Address Incomplete)	[26] 21.4.22			[26] 21.4.22		
35	485 (Ambiguous)	[26] 21.4.23			[26] 21.4.23		
36	486 (Busy Here)	[26] 21.4.24			[26] 21.4.24		
37	487 (Request Terminated)	[26] 21.4.25			[26] 21.4.25		
38	488 (Not Acceptable Here)	[26] 21.4.26	m	m	[26] 21.4.26	i	i
39	489 (Bad Event)	[28] 7.3.2	c4	c4	[28] 7.3.2	c4	c4
40	491 (Request Pending)	[26] 21.4.27			[26] 21.4.27		
41	493 (Undecipherable)	[26] 21.4.28			[26] 21.4.28		
41A	494 (Security Agreement Required)	[48] 2	c7	c7	[48] 2	n/a	n/a
42	500 (Internal Server Error)	[26] 21.5.1			[26] 21.5.1		
43	501 (Not Implemented)	[26] 21.5.2			[26] 21.5.2		
44	502 (Bad Gateway)	[26] 21.5.3			[26] 21.5.3		
45	503 (Service Unavailable)	[26] 21.5.4			[26] 21.5.4		
46	504 (Server Time-out)	[26] 21.5.5			[26] 21.5.5		
47	505 (Version not supported)	[26] 21.5.6			[26] 21.5.6		
48	513 (Message Too Large)	[26] 21.5.7			[26] 21.5.7		
49	580 (Precondition Failure)	[30] 8			[30] 8		
50	600 (Busy Everywhere)	[26] 21.6.1			[26] 21.6.1		
51	603 (Decline)	[26] 21.6.2	m	m	[26] 21.6.2	i	i
52	604 (Does Not Exist Anywhere)	[26] 21.6.3			[26] 21.6.3		
53	606 (Not Acceptable)	[26] 21.6.4			[26] 21.6.4		
c1:	IF A.162/15 THEN m ELSE n/a - - stateful proxy.						
c2:	IF A.162/15 THEN m ELSE i - - the requirement to be able to use separate URIs in the upstream direction and downstream direction when record routing.						
c3:	IF A.163/9 THEN m ELSE n/a - - INVITE response.						
c4:	IF A.162/27 THEN m ELSE n/a - - SIP specific event notification.						
c5:	IF A.163/19 OR A.163/21 THEN m ELSE n/a - - REGISTER response or SUBSCRIBE response.						
c6:	IF A.163/19 OR A.163/21 THEN i ELSE n/a - - REGISTER response or SUBSCRIBE response.						
c7:	IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						
c8:	IF A.162/52 THEN m ELSE n/a - - the SIP session timer.						
c9:	IF A.162/53 AND A.163/17 THEN m ELSE n/a - - the SIP Referred-By mechanism and REFER response.						
c20:	IF A.4/51 THEN m ELSE n/a						

A.2.2.4.2 ACK method

Prerequisite A.163/1 - - ACK request

Table A.165: Supported headers within the ACK request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept-Contact	[56B] 9.2	c10	c10	[56B] 9.2	c11	c11
2	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
3	Authorization	[26] 20.7	m	m	[26] 20.7	i	i
4	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
6	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
7	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
8	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
9	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
10	Content-Type	[26] 20.15	m	m	[26] 20.15	i	c3
11	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
12	Date	[26] 20.17	m	m	[26] 20.17	c2	c2
13	From	[26] 20.20	m	m	[26] 20.20	m	m
14	Max-Forwards	[26] 20.22	m	m	[26] 20.22	m	m
15	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	c3
15A	Privacy	[33] 4.2	c6	c6	[33] 4.2	c7	c7
16	Proxy-Authorization	[26] 20.28	m	m	[26] 20.28	c4	c4
17	Proxy-Require	[26] 20.29	m	m	[26] 20.29	m	m
17A	Reason	[34A] 2	c8	c8	[34A] 2	c9	c9
17B	Reject-Contact	[56B] 9.2	c10	c10	[56B] 9.2	c11	c11
17C	Request-Disposition	[56B] 9.1	c10	c10	[56B] 9.1	c11	c11
18	Require	[26] 20.32	m	m	[26] 20.32	c5	c5
19	Route	[26] 20.34	m	m	[26] 20.34	m	m
20	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
21	To	[26] 20.39	m	m	[26] 20.39	m	m
22	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
23	Via	[26] 20.42	m	m	[26] 20.42	m	m
c1:	IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.						
c2:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						
c3:	IF A.3/2 OR A.3/4 THEN m ELSE i - - P-CSCF or S-CSCF.						
c4:	IF A.162/8A THEN m ELSE i - - authentication between UA and proxy.						
c5:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.						
c6:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c7:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c8:	IF A.162/48 THEN m ELSE n/a - - the Reason header field for the session initiation protocol.						
c9:	IF A.162/48 THEN i ELSE n/a - - the Reason header field for the session initiation protocol.						
c10:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.						
c11:	IF A.162/50 THEN i ELSE n/a - - caller preferences for the session initiation protocol.						
NOTE:	c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.						

Editor's note: Is the following table a suitable way of showing the contents of message bodies.

Prerequisite A.163/1 - - ACK request

Table A.166: Supported message bodies within the ACK request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.2.4.3 BYE method

Prerequisite A.163/2 - - BYE request

Table A.167: Supported headers within the BYE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
1A	Accept-Contact	[56B] 9.2	c22	c22	[56B] 9.2	c23	c23
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
3A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
5	Authorization	[26] 20.7	m	m	[26] 20.7	i	i
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
7	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	c3
8	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	c3
9	Content-Language	[26] 20.13	m	m	[26] 20.13	i	c3
10	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
11	Content-Type	[26] 20.15	m	m	[26] 20.15	i	c3
12	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
13	Date	[26] 20.17	m	m	[26] 20.17	c2	c2
14	From	[26] 20.20	m	m	[26] 20.20	m	m
15	Max-Forwards	[26] 20.22	m	m	[26] 20.22	m	m
16	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	c3
16A	P-Access-Network-Info	[52] 4.4	c13	c13	[52] 4.4	c14	c14
16B	P-Asserted-Identity	[34] 9.1	c9	c9	[34] 9.1	c10	c10
16C	P-Charging-Function-Addresses	[52] 4.5	c17	c17	[52] 4.5	c18	c18
16D	P-Charging-Vector	[52] 4.6	c15	n/a	[52] 4.6	c16	n/a
16E	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c8	n/a
16F	Privacy	[33] 4.2	c11	c11	[33] 4.2	c12	c12
17	Proxy-Authorization	[26] 20.28	m	m	[26] 20.28	c4	c4
18	Proxy-Require	[26] 20.29	m	m	[26] 20.29	m	m
18A	Reason	[34A] 2	c20	c20	[34A] 2	c21	c21
19	Record-Route	[26] 20.30	m	m	[26] 20.30	c7	c7
19A	Referred-By	[59] 3	c24	c24	[59] 3	c25	c25
19B	Reject-Contact	[56B] 9.2	c22	c22	[56B] 9.2	c23	c23
19C	Request-Disposition	[56B] 9.1	c22	c22	[56B] 9.1	c23	c23
20	Require	[26] 20.32	m	m	[26] 20.32	c5	c5
21	Route	[26] 20.34	m	m	[26] 20.34	m	m
21A	Security-Client	[48] 2.3.1	x	x	[48] 2.3.1	c19	c19
21B	Security-Verify	[48] 2.3.1	x	x	[48] 2.3.1	c19	c19
22	Supported	[26] 20.37	m	m	[26] 20.37	c6	c6
23	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
24	To	[26] 20.39	m	m	[26] 20.39	m	m
25	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
26	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.
c2:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.
c3:	IF A.3/2 OR A.3/4 THEN m ELSE i - - P-CSCF or S-CSCF.
c4:	IF A.162/8A THEN m ELSE i - - authentication between UA and proxy.
c5:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.
c6:	IF A.162/16 THEN m ELSE i - - reading the contents of the Supported header before proxying the response.
c7:	IF A.162/14 THEN o ELSE i - - the requirement to be able to insert itself in the subsequent transactions in a dialog.
c8:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.
c9:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c10:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.
c11:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c12:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.
c13:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c14:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c15:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c16:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.
c17:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c18:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.
c19:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c20:	IF A.162/48 THEN m ELSE n/a - - the Reason header field for the session initiation protocol.
c21:	IF A.162/48 THEN i ELSE n/a - - the Reason header field for the session initiation protocol.
c22:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.
c23:	IF A.162/50 THEN i ELSE n/a - - caller preferences for the session initiation protocol.
c24:	IF A.162/53 THEN i ELSE n/a - - the SIP Referred-By mechanism.
c25:	IF A.162/53 THEN m ELSE n/a - - the SIP Referred-By mechanism.
NOTE:	c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.

Prerequisite A.163/2 - - BYE request

Table A.168: Supported message bodies within the BYE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.163/3 - - BYE response

Prerequisite: A.164/1 - - 100 (Trying)

Table A.169: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
3	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
4	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
5	From	[26] 20.20	m	m	[26] 20.20	m	m
6	To	[26] 20.39	m	m	[26] 20.39	m	m
7	Via	[26] 20.42	m	m	[26] 20.42	m	m
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						

Prerequisite A.163/3 - - BYE response

Table A.170: Supported headers within the BYE response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	c2
3	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	c2
4	Content-Language	[26] 20.13	m	m	[26] 20.13	i	c2
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	i	c2
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	c2
10A	P-Access-Network-Info	[52] 4.4	c12	c12	[52] 4.4	c13	c13
10B	P-Asserted-Identity	[34] 9.1	c4	c4	[34] 9.1	c5	c5
10C	P-Charging-Function-Addresses	[52] 4.5	c10	c10	[52] 4.5	c11	c11
10D	P-Charging-Vector	[52] 4.6	c8	n/a	[52] 4.6	c9	n/a
10E	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c3	n/a
10F	Privacy	[33] 4.2	c6	c6	[33] 4.2	c7	c7
10G	Require	[26] 20.32	m	m	[26] 20.32	c14	c14
10H	Server	[26] 20.35	m	m	[26] 20.35	i	i
11	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
12	To	[26] 20.39	m	m	[26] 20.39	m	m
12A	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
13	Via	[26] 20.42	m	m	[26] 20.42	m	m
14	Warning	[26] 20.43	m	m	[26] 20.43	i	i
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						
c2:	IF A.3/2 OR A.3/4 THEN m ELSE i - - P-CSCF or S-CSCF.						
c3:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.						
c4:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c5:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.						
c6:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c7:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c8:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c9:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.						
c10:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c11:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.						
c12:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c13:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c14:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.						

Prerequisite A.163/3 - - BYE response

Prerequisite: A.164/6 - - 2xx

Table A.171: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Authentication-Info	[26] 20.6	m	m	[26] 20.6	i	i
2	Record-Route	[26] 20.30	m	m	[26] 20.30	c3	c3
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c3:	IF A.162/15 THEN o ELSE i - - the requirement to be able to use separate URIs in the upstream direction and downstream direction when record routing.						

Prerequisite A.163/3 - BYE response

Prerequisite: A.164/8 OR A.164/9 OR A.164/10 OR A.164/11 OR A.164/12 OR A.164/35 - - 3xx or 485 (Ambiguous)

Table A.172: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Contact	[26] 20.10	m	m	[26] 20.10	c1	c1
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c1:	IF A.162/19E THEN m ELSE i - - deleting Contact headers.						

Prerequisite A.163/3 - - BYE response

Prerequisite: A.164/14 - - 401 (Unauthorized)

Table A.173: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
2	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
8	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/3 - - BYE response

Prerequisite: A.164/17 OR A.164/23 OR A.164/30 OR A.164/36 OR A.164/42 OR A.164/45 OR A.164/50 OR A.164/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.174: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/3 - - BYE response

Prerequisite: A.164/18 - - 405 (Method Not Allowed)

Table A.175: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/3 - - BYE response

Prerequisite: A.164/20 - - 407 (Proxy Authentication Required)

Table A.176: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
2	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
6	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/3 - - BYE response

Prerequisite: A.164/25 - - 415 (Unsupported Media Type)

Table A.177: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
3A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/3 - - BYE response

Prerequisite: A.164/27 - - 420 (Bad Extension)

Table A.178: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i
5	Unsupported	[26] 20.40	m	m	[26] 20.40	c3	c3
c3:	IF A.162/18 THEN m ELSE i - - reading the contents of the Unsupported header before proxying the 420 response to a method other than REGISTER.						

Prerequisite A.163/3 - - BYE response

Prerequisite: A.164/28 OR A.164/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.178A: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	c1	c1	[48] 2	n/a	n/a
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:		IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.					

Prerequisite A.163/3 - - BYE response

Prerequisite: A.164/34 - - 484 (Address Incomplete)

Table A.179: Supported headers within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/3 - - BYE response

Table A.180: Supported message bodies within the BYE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.2.4.4 CANCEL method

Prerequisite A.163/4 - - CANCEL request

Table A.181: Supported headers within the CANCEL request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept-Contact	[56B] 9.2	c10	c10	[56B] 9.2	c11	c11
4	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
5	Authorization	[26] 20.7	m	m	[26] 20.7	i	i
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
8	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
9	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
10	Date	[26] 20.17	m	m	[26] 20.17	c2	c2
11	From	[26] 20.20	m	m	[26] 20.20	m	m
12	Max-Forwards	[26] 20.22	m	m	[26] 20.22	m	m
14	Privacy	[33] 4.2	c3	c3	[33] 4.2	c4	c4
15	Reason	[34A] 2	c8	c8	[34A] 2	c9	c9
16	Record-Route	[26] 20.30	m	m	[26] 20.30	c7	c7
17	Reject-Contact	[56B] 9.2	c10	c10	[56B] 9.2	c11	c11
17A	Request-Disposition	[56B] 9.1	c10	c10	[56B] 9.1	c11	c11
18	Route	[26] 20.34	m	m	[26] 20.34	m	m
19	Supported	[26] 20.37	m	m	[26] 20.37	c6	c6
20	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
21	To	[26] 20.39	m	m	[26] 20.39	m	m
22	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
23	Via	[26] 20.42	m	m	[26] 20.42	m	m
c1:	IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.						
c2:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						
c3:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c4:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c6:	IF A.162/16 THEN m ELSE i - - reading the contents of the Supported header before proxying the response.						
c7:	IF A.162/14 THEN o ELSE i - - the requirement to be able to insert itself in the subsequent transactions in a dialog.						
c8:	IF A.162/48 THEN m ELSE n/a - - the Reason header field for the session initiation protocol.						
c9:	IF A.162/48 THEN i ELSE n/a - - the Reason header field for the session initiation protocol.						
c10:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.						
c11:	IF A.162/50 THEN i ELSE n/a - - caller preferences for the session initiation protocol.						
NOTE:	c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.						

Prerequisite A.163/4 - - CANCEL request

Table A.182: Supported message bodies within the CANCEL request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.163/5 - - CANCEL response

Table A.183: Supported headers within the CANCEL response - all status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
3	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
4	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
5	From	[26] 20.20	m	m	[26] 20.20	m	m
5A	Privacy	[33] 4.2	c2	c2	[33] 4.2	c3	c3
6	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
7	To	[26] 20.39	m	m	[26] 20.39	m	m
7A	User-Agent	[26] 20.41	o		[26] 20.41	o	
8	Via	[26] 20.42	m	m	[26] 20.42	m	m
9	Warning	[26] 20.43	m	m	[26] 20.43	i	i
c1: IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses. c2: IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP). c3: IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.							

Prerequisite A.163/5 - - CANCEL response

Prerequisite: A.164/6 - - 200 (OK)

Table A.184: Supported headers within the CANCEL response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Record-Route	[26] 20.30	m	m	[26] 20.30	c3	c3
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c3: IF A.162/15 THEN o ELSE i - - the requirement to be able to use separate URIs in the upstream direction and downstream direction when record routing.							

Prerequisite A.163/5 - - CANCEL response

Prerequisite: A.164/14 - - 401 (Unauthorized)

Table A.185: Supported headers within the CANCEL response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/5 - - CANCEL response

Prerequisite: A.164/17 OR A.164/23 OR A.164/30 OR A.164/42 OR A.164/45 OR A.164/50 OR A.164/51 - - 404, 413, 480, 500, 503, 600, 603

Table A.186: Supported headers within the CANCEL response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Error-Info	[26] 2418	m	m	[26] 20.18	i	i
4	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/5 - - CANCEL response

Prerequisite: A.164/34 - - 484 (Address Incomplete)

Table A.188: Supported headers within the CANCEL response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/5 - - CANCEL response

Table A.189: Supported message bodies within the CANCEL response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.2.4.5 COMET method

Void

A.2.2.4.6 INFO method

Void

A.2.2.4.7 INVITE method

Prerequisite A.163/8 - - INVITE request

Table A.204: Supported headers within the INVITE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
1A	Accept-Contact	[56B] 9.2	c34	c34	[56B] 9.2	c34	c35
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
4	Alert-Info	[26] 20.4	c2	c2	[26] 20.4	c3	c3
5	Allow	[26] 20.5	m	m	[26] 20.5	i	i
6	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
8	Authorization	[26] 20.7	m	m	[26] 20.7	i	i
9	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
10	Call-Info	[26] 20.9	m	m	[26] 20.9	c12	c12
11	Contact	[26] 20.10	m	m	[26] 20.10	i	i
12	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	c6
13	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	c6
14	Content-Language	[26] 20.13	m	m	[26] 20.13	i	c6
15	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
16	Content-Type	[26] 20.15	m	m	[26] 20.15	i	c6
17	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
18	Date	[26] 20.17	m	m	[26] 20.17	c4	c4
19	Expires	[26] 20.19	m	m	[26] 20.19	i	i
20	From	[26] 20.20	m	m	[26] 20.20	m	m
21	In-Reply-To	[26] 20.21	m	m	[26] 20.21	i	i
21A	Replaces	[61] 7.1	c41	c41	[61] 7.1	c42	c42
22	Max-Forwards	[26] 20.22	m	m	[26] 20.22	m	m
23	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	c6
23A	Min-SE	[58] 5	o	o	[58] 5	o	o
24	Organization	[26] 20.25	m	m	[26] 20.25	c5	c5
24A	P-Access-Network-Info	[52] 4.4	c28	c28	[52] 4.4	c29	c30
24B	P-Asserted-Identity	[34] 9.1	c15	c15	[34] 9.1	c16	c16
24C	P-Called-Party-ID	[52] 4.2	c19	c19	[52] 4.2	c20	c21
24D	P-Charging-Function-Addresses	[52] 4.5	c26	c27	[52] 4.5	c26	c27
24E	P-Charging-Vector	[52] 4.6	c24	c24	[52] 4.6	c25	c25
25	P-Media-Authorization	[31] 6.1	c9	c10	[31] 6.1	n/a	n/a
25A	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c14	c14
25B	P-Visited-Network-ID	[52] 4.3	c22	n/a	[52] 4.3	c23	n/a
26	Priority	[26] 20.26	m	m	[26] 20.26	i	i
26A	Privacy	[33] 4.2	c17	c17	[33] 4.2	c18	c18
27	Proxy-Authorization	[26] 20.28	m	m	[26] 20.28	c13	c13
28	Proxy-Require	[26] 20.29, [34] 4	m	m	[26] 20.29, [34] 4	m	m
28A	Reason	[34A] 2	c32	c32	[34A] 2	c33	c33
29	Record-Route	[26] 20.30	m	m	[26] 20.30	c11	c11
30	Referred-By	[59] 3	c37	c37	[59] 3	c38	c38
31	Reject-Contact	[56B] 9.2	c34	c34	[56B] 9.2	c34	c35
31A	Replaces	[60] 6.1	c39	c39	[60] 6.1	c40	c40
31B	Reply-To	[26] 20.31	m	m	[26] 20.31	i	i

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
31B	Request-Disposition	[56B] 9.1	c34	c34	[56B] 9.1	c34	c34
32	Require	[26] 20.32	m	m	[26] 20.32	c7	c7
33	Route	[26] 20.34	m	m	[26] 20.34	m	m
33A	Security-Client	[48] 2.3.1	x	x	[48] 2.3.1	c31	c31
33B	Security-Verify	[48] 2.3.1	x	x	[48] 2.3.1	c31	c31
33C	Session-Expires	[58] 4	c36	c36	[58] 4	c36	c36
34	Subject	[26] 20.36	m	m	[26] 20.36	i	i
35	Supported	[26] 20.37	m	m	[26] 20.37	c8	c8
36	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
37	To	[26] 20.39	m	m	[26] 20.39	m	m
38	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
39	Via	[26] 20.42	m	m	[26] 20.42	m	m

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
c1:	IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.						
c2:	IF A.162/10 THEN n/a ELSE m - - suppression or modification of alerting information data.						
c3:	IF A.162/10 THEN m ELSE i - - suppression or modification of alerting information data.						
c4:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						
c5:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.						
c6:	IF A.3/2 OR A.3/4 THEN m ELSE i - - P-CSCF or S-CSCF.						
c7:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.						
c8:	IF A.162/16 THEN m ELSE i - - reading the contents of the Supported header before proxying the response.						
c9:	IF A.162/26 THEN m ELSE n/a - - SIP extensions for media authorization.						
c10:	IF A.3/2 THEN m ELSE n/a - - P-CSCF.						
c11:	IF A.162/14 THEN m ELSE i - - the requirement to be able to insert itself in the subsequent transactions in a dialog.						
c12:	IF A.162/19C OR A.162/19D THEN m ELSE i - - reading, adding or concatenating the Call-Info header.						
c13:	IF A.162/8A THEN m ELSE i - - authentication between UA and proxy.						
c14:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.						
c15:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c16:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.						
c17:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c18:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c19:	IF A.162/37 THEN m ELSE n/a - - the P-Called-Party-ID header extension.						
c20:	IF A.162/37 THEN i ELSE n/a - - the P-Called-Party-ID header extension.						
c21:	IF A.162/37 AND A.3/2 THEN m ELSE IF A.162/37 AND A.3/3 THEN i ELSE n/a - - the P-Called-Party-ID header extension and P-CSCF or I-CSCF.						
c22:	IF A.162/38 THEN m ELSE n/a - - the P-Visited-Network-ID header extension.						
c23:	IF A.162/39 THEN m ELSE i - - reading, or deleting the P-Visited-Network-ID header before proxying the request or response.						
c24:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c25:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.						
c26:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c27:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.						
c28:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c29:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c30:	IF A.162/43 OR (A.162/41 AND A.3/2) THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension (with or without P-CSCF).						
c31:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						
c32:	IF A.162/48 THEN m ELSE n/a - - the Reason header field for the session initiation protocol.						
c33:	IF A.162/48 THEN i ELSE n/a - - the Reason header field for the session initiation protocol.						
c34:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.						
c35:	IF A.162/50 AND A.4/3 THEN m ELSE IF A.162/50 AND NOT A.4/3 THEN i ELSE n/a - - caller preferences for the session initiation protocol, and S-CSCF.						
c36:	IF A.162/52 THEN m ELSE n/a - - the SIP session timer.						
c37:	IF A.162/53 THEN i ELSE n/a - - the SIP Referred-By mechanism.						
c38:	IF A.162/53 THEN m ELSE n/a - - the SIP Referred-By mechanism.						
c39:	IF A.162/54 THEN m ELSE n/a - - the Session Initiation Protocol (SIP) "Replaces" header.						
c40:	IF A.162/54 THEN i ELSE n/a - - the Session Initiation Protocol (SIP) "Replaces" header.						
c41:	IF A.162/55 THEN m ELSE n/a - - the Session Initiation Protocol (SIP) "Join" header.						
c42:	IF A.162/55 THEN i ELSE n/a - - the Session Initiation Protocol (SIP) "Join" header.						
NOTE:	c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.						

Prerequisite A.163/8 - - INVITE request

Table A.205: Supported message bodies within the INVITE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/1 - - 100 (Trying)

Table A.206: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
3	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
4	Date	[26] 20.17	c1	c1	[26] 20.17	c2	c2
5	From	[26] 20.20	m	m	[26] 20.20	m	m
6	To	[26] 20.39	m	m	[26] 20.39	m	m
7	Via	[26] 20.42	m	m	[26] 20.42	m	m
c1:	IF (A.162/9 AND A.162/5) OR A.162/4 THEN m ELSE n/a - - stateful proxy behaviour that inserts date, or stateless proxies.						
c2:	IF A.162/4 THEN i ELSE m - - Stateless proxy passes on.						

Prerequisite A.163/9 - - INVITE response

Table A.207: Supported headers within the INVITE response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
1A	Call-Info	[26] 20.9	m	m	[26] 20.9	c4	c4
2	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	c3
3	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	c3
4	Content-Language	[26] 20.13	m	m	[26] 20.13	i	c3
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	i	c3
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	c3
11	Organization	[26] 20.25	m	m	[26] 20.25	c2	c2
11A	P-Access-Network-Info	[52] 4.4	c14	c14	[52] 4.4	c15	c15
11B	P-Asserted-Identity	[34] 9.1	c6	c6	[34] 9.1	c7	c7
11C	P-Charging-Function-Addresses	[52] 4.5	c12	c12	[52] 4.5	c13	c13
11D	P-Charging-Vector	[52] 4.6	c10	c10	[52] 4.6	c11	c11
11E	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c5	n/a
11F	Privacy	[33] 4.2	c8	c8	[33] 4.2	c9	c9
11G	Require	[26] 20.32	m	m	[26] 20.32	c16	c16
11H	Server	[26] 20.35	m	m	[26] 20.35	i	i
12	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
13	To	[26] 20.39	m	m	[26] 20.39	m	m
13A	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
14	Via	[26] 20.42	m	m	[26] 20.42	m	m
15	Warning	[26] 20.43	m	m	[26] 20.43	i	i
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						
c2:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.						
c3:	IF A.3/2 OR A.3/4 THEN m ELSE i - - P-CSCF or S-CSCF.						
c4:	IF A.162/19C OR A.162/19D THEN m ELSE i - - reading, adding or concatenating the Call-Info header.						
c5:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.						
c6:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c7:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.						
c8:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c9:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c10:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c11:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.						
c12:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c13:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.						
c14:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c15:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c16:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.						

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/2 OR A.164/3 OR A.164/4 OR A.164/5 - - 1xx

Table A.208: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Contact	[26] 20.10	m	m	[26] 20.10	i	i
6	P-Media-Authorization	[31] 6.1	c9	c10	[31] 6.1	n/a	n/a
9	Rseq	[27] 7.1	m	m	[27] 7.1	i	i
11	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c9:	IF A.162/26 THEN m ELSE n/a - - SIP extensions for media authorization.						
c10:	IF A.3/2 THEN m ELSE n/a - - P-CSCF.						

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/6 - - 2xx

Table A.209: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
1A	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
1B	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
2	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Authentication-Info	[26] 20.6	m	m	[26] 20.6	i	i
6	Contact	[26] 20.10	m	m	[26] 20.10	i	i
8	P-Media-Authorization	[31] 6.1	c9	c10	[31] 6.1	n/a	n/a
9	Record-Route	[26] 20.30	m	m	[26] 20.30	c3	c3
10	Session-Expires	[58] 4	c11	c11	[58] 4	c11	c11
13	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c3:	IF A.162/14 THEN m ELSE i - - the requirement to be able to insert itself in the subsequent transactions in a dialog.						
c9:	IF A.162/26 THEN m ELSE n/a - - SIP extensions for media authorization.						
c10:	IF A.3/2 THEN m ELSE n/a - - P-CSCF.						
c11:	IF A.162/52 THEN m ELSE n/a - - the SIP session timer.						

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/8 OR A.164/9 OR A.164/10 OR A.164/11 OR A.164/12 OR A.164/35 - - 3xx or 485 (Ambiguous)

Table A.210: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Contact	[26] 20.10	m	m	[26] 20.10	c1	c1
5	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
10	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c1:	IF A.162/19E THEN m ELSE i - - deleting Contact headers.						

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/14 - - 401 (Unauthorized)

Table A.211: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
6	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
10	Supported	[26] 20.37	m	m	[26] 20.37	i	i
15	WWW-Authenticate	[26] 20.44	o		[26] 20.44	o	

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/17 OR A.164/23 OR A.164/30 OR A.164/36 OR A.164/50 OR A.164/51 - - 404, 413, 480, 486, 600, 603

Table A.212: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
8	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
10	Supported	[26] 20.37	m	m	[26] 20.37	i	i
12	Via	[26] 20.42	m	m	[26] 20.42	m	m

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/18 - - 405 (Method Not Allowed)

Table A.213: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Allow	[26] 20.5	m		[26] 20.5	m/o	
5	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
13	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/20 - - 407 (Proxy Authentication Required)

Table A.214: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
6	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
10	Supported	[26] 20.37	m	m	[26] 20.37	i	i
11	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/25 - - 415 (Unsupported Media Type)

Table A.215: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
3A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
6	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
11	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/27 - - 420 (Bad Extension)

Table A.216: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
9	Supported	[26] 20.37	m	m	[26] 20.37	i	i
10	Unsupported	[26] 20.40	m	m	[26] 20.40	c3	c3
c3:	IF A.162/18 THEN m ELSE i - - reading the contents of the Unsupported header before proxying the 420 response to a method other than REGISTER.						

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/28 OR A.164/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.216A: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	c1	c1	[48] 2	n/a	n/a
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						

Prerequisite A.16/9 - - INVITE response

Prerequisite: A.164/28A - - 422 (Session Interval Too Small)

Table A.216B: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Min-SE	[58] 5	c1	c1	[58] 5	c1	c1
c1: IF A.162/52 THEN m ELSE n/a - - the SIP session timer.							

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/34 - - 484 (Address Incomplete)

Table A.217: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
9	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/42 - - 500 (Server Internal Error)

Table A.217A: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
8	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
10	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/9 - - INVITE response

Prerequisite: A.164/45 - - 503 (Service Unavailable)

Table A.217B: Supported headers within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
8	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
10	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/9 - - INVITE response

Table A.218: Supported message bodies within the INVITE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.2.4.7A MESSAGE method

Prerequisite A.163/9A - - MESSAGE request

Table A.218A: Supported headers within the MESSAGE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept-Contact	[56B] 9.2	c28	c28	[56B] 9.2	c28	c29
1A	Allow	[26] 20.5	m	m	[50] 10	i	i
2	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
3	Authorization	[26] 20.7	m	m	[26] 20.7	i	i
4	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
5	Call-Info	[26] 20.9	m	m	[26] 20.9	c4	c4
6	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
7	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
8	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
9	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
10	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
11	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
12	Date	[26] 20.17	m	m	[26] 20.17	c2	c2
13	Expires	[26] 20.19	m	m	[26] 20.19	l	i
14	From	[26] 20.20	m	m	[26] 20.20	m	m
15	In-Reply-To	[26] 20.21	m	m	[50] 10	i	i
16	Max-Forwards	[26] 20.22	m	m	[26] 20.22	m	m
17	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
18	Organization	[26] 20.25	m	m	[26] 20.25	c3	c3
18A	P-Access-Network-Info	[52] 4.4	c23	c23	[52] 4.4	c24	c24
18B	P-Asserted-Identity	[34] 9.1	c10	c10	[34] 9.1	c11	c11
18C	P-Called-Party-ID	[52] 4.2	c14	c14	[52] 4.2	c15	c16
18D	P-Charging-Function-Addresses	[52] 4.5	c21	c21	[52] 4.5	c22	c22
18E	P-Charging-Vector	[52] 4.6	c19	c19	[52] 4.6	c20	c20
18F	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c9	c9
18G	P-Visited-Network-ID	[52] 4.3	c17	n/a	[52] 4.3	c18	n/a
19	Priority	[26] 20.26	m	m	[26] 20.26	i	i
19A	Privacy	[33] 4.2	c12	c12	[33] 4.2	c13	c13
20	Proxy-Authorization	[26] 20.28	m	m	[26] 20.28	c8	c8
21	Proxy-Require	[26] 20.29	m	m	[26] 20.29	m	m
21A	Reason	[34A] 2	c26	c26	[34A] 2	c27	c27
22	Record-Route	[26] 20.30	m	m	[26] 20.30	c7	c7
22A	Referred-By	[59] 3	c30	c30	[59] 3	c31	c31
23	Reject-Contact	[56B] 9.2	c28	c28	[56B] 9.2	c28	c29
23A	Reply-To	[26] 20.31	m	m	[26] 20.31	i	i
23B	Request-Disposition	[56B] 9.1	c28	c28	[56B] 9.1	c28	c28
24	Require	[26] 20.32	m	m	[26] 20.32	c5	c5
25	Route	[26] 20.34	m	m	[26] 20.34	m	m
25A	Security-Client	[48] 2.3.1	x	x	[48] 2.3.1	c25	c25
25B	Security-Verify	[48] 2.3.1	x	x	[48] 2.3.1	c25	c25
26	Subject	[26] 20.36	m	m	[26] 20.36	i	i
27	Supported	[26] 20.37	m	m	[26] 20.37	c6	c6
28	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
29	To	[26] 20.39	m	m	[26] 20.39	m	m
30	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
31	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.
c2:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.
c3:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.
c4:	IF A.162/19C OR A.162/19D THEN m ELSE i - - reading, adding or concatenating the Call-Info header.
c5:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.
c6:	IF A.162/16 THEN m ELSE i - - reading the contents of the Supported header before proxying the response.
c7:	IF A.162/14 THEN o ELSE i - - the requirement to be able to insert itself in the subsequent transactions in a dialog.
c8:	IF A.162/8A THEN m ELSE i - - authentication between UA and proxy.
c9:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.
c10:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c11:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.
c12:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c13:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.
c14:	IF A.162/37 THEN m ELSE n/a - - the P-Called-Party-ID header extension.
c15:	IF A.162/37 THEN i ELSE n/a - - the P-Called-Party-ID header extension.
c16:	IF A.162/37 AND A.3/2 THEN m ELSE IF A.162/37 AND A.3/3 THEN i ELSE n/a - - the P-Called-Party-ID header extension and P-CSCF or I-CSCF.
c17:	IF A.162/38 THEN m ELSE n/a - - the P-Visited-Network-ID header extension.
c18:	IF A.162/39 THEN m ELSE i - - reading, or deleting the P-Visited-Network-ID header before proxying the request or response.
c19:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c20:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.
c21:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c22:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.
c23:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c24:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c25:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c26:	IF A.162/48 THEN m ELSE n/a - - the Reason header field for the session initiation protocol.
c27:	IF A.162/48 THEN i ELSE n/a - - the Reason header field for the session initiation protocol.
c28:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.
c29:	IF A.162/50 AND A.4/3 THEN m ELSE IF A.162/50 AND NOT A.4/3 THEN i ELSE n/a - - caller preferences for the session initiation protocol, and S-CSCF.
c30:	IF A.162/53 THEN i ELSE n/a - - the SIP Referred-By mechanism.
c31:	IF A.162/53 THEN m ELSE n/a - - the SIP Referred-By mechanism.
NOTE:	c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.

Prerequisite A.163/9A - - MESSAGE request

Table A.218B: Supported message bodies within the MESSAGE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.163/9B - - MESSAGE response

Table A.218C: Supported headers within the MESSAGE response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Call-Info	[26] 20.9	m	m	[26] 20.9	c3	c3
3	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
4	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
5	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
6	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
7	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
8	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
9	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
10	From	[26] 20.20	m	m	[26] 20.20	m	m
11	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
12	Organization	[26] 20.25	m	m	[26] 20.25	c2	c2
12A	P-Access-Network-Info	[52] 4.4	c13	c13	[52] 4.4	c14	c14
12B	P-Asserted-Identity	[34] 9.1	c5	c5	[34] 9.1	c6	c6
12C	P-Charging-Function-Addresses	[52] 4.5	c11	c11	[52] 4.5	c12	c12
12D	P-Charging-Vector	[52] 4.6	c9	n/a	[52] 4.6	c10	n/a
12E	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c4	n/a
12F	Privacy	[33] 4.2	c7	c7	[33] 4.2	c8	c8
12G	Require	[26] 20.32	m	m	[26] 20.32	c15	c15
13	Server	[26] 20.35	m	m	[26] 20.35	i	i
14	Timestamp	[26] 20.38	i	i	[26] 20.38	i	i
15	To	[26] 20.39	m	m	[26] 20.39	m	m
16	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
17	Via	[26] 20.42	m	m	[26] 20.42	m	m
18	Warning	[26] 20.43	m	m	[26] 20.43	i	i
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						
c2:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.						
c3:	IF A.162/19C OR A.162/19D THEN m ELSE i - - reading, adding or concatenating the Call-Info header.						
c4:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.						
c5:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c6:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.						
c7:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c8:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c9:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c10:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.						
c11:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c12:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.						
c13:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c14:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c15:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.						

Prerequisite A.163/9B - - MESSAGE response

Prerequisite: A.164/6 - - 2xx

Table A.218D: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Authentication-Info	[26] 20.6	m	m	[26] 20.6	i	i
4	Record-Route	[26] 20.30	m	m	[26] 20.30	c3	c3
6	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c3:	IF A.162/15 THEN o ELSE i - - the requirement to be able to use separate URIs in the upstream direction and downstream direction when record routing.						

Prerequisite A.163/9B - - MESSAGE response

Prerequisite: A.164/8 OR A.164/9 OR A.164/10 OR A.164/11 OR A.164/12 OR A.164/35 - - 3xx or 485 (Ambiguous)

Table A.218E: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[50] 10	i	i
2	Contact	[26] 20.10	m	m	[26] 20.10	c1	c1
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c1:	IF A.162/19E THEN m ELSE i - - deleting Contact headers.						

Prerequisite A.163/9B - - MESSAGE response

Prerequisite: A.164/14 - - 401 (Unauthorized)

Table A.218F: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[50] 10	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
6	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/9B - - MESSAGE response

Prerequisite: A.164/17 OR A.164/23 OR A.164/30 OR A.164/36 OR A.164/42 OR A.164/45 OR A.164/50 OR A.164/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.218G: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[50] 10	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/9B - - MESSAGE response

Prerequisite: A.164/18 - - 405 (Method Not Allowed)

Table A.218H: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/9B - - MESSAGE response

Prerequisite: A.164/20 - - 407 (Proxy Authentication Required)

Table A.218I: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[50] 10	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
6	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/9B - - MESSAGE response

Prerequisite: A.164/25 - - 415 (Unsupported Media Type)

Table A.218J: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
4	Allow	[26] 20.5	m	m	[50] 10	i	i
5	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/9B - - MESSAGE response

Prerequisite: A.164/27 - - 420 (Bad Extension)

Table A.218K: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[50] 10	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i
5	Unsupported	[26] 20.40	m	m	[26] 20.40	c3	c3
c3:	IF A.162/18 THEN m ELSE i - - reading the contents of the Unsupported header before proxying the 420 response to a method other than REGISTER.						

Prerequisite A.163/9B - - MESSAGE response

Prerequisite: A.164/28 OR A.164/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.218L: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	c1	c1	[48] 2	n/a	n/a
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:		IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.					

Prerequisite A.163/9B - - MESSAGE response

Prerequisite: A.164/34 - - 484 (Address Incomplete)

Table A.218M: Supported headers within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[50] 10	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/9B - - MESSAGE response

Table A.218N: Supported message bodies within the MESSAGE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.2.4.8 NOTIFY method

Prerequisite A.163/10 - - NOTIFY request

Table A.219: Supported headers within the NOTIFY request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
1A	Accept-Contact	[56B] 9.2	c21	c21	[56B] 9.2	c22	c22
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
3A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
5	Authorization	[26] 20.7	m	m	[26] 20.7	i	i
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
6A	Contact	[26] 20.10	m	m	[26] 20.10	i	i
7	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
8	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
9	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
10	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
11	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
12	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
13	Date	[26] 20.17	m	m	[26] 20.17	c2	c2
14	Event	[28] 7.2.1	m	m	[28] 7.2.1	m	m
15	From	[26] 20.20	m	m	[26] 20.20	m	m
16	Max-Forwards	[26] 20.22	m	m	[26] 20.22	m	m
17	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
17A	P-Access-Network-Info	[52] 4.4	c16	c16	[52] 4.4	c17	c17
17B	P-Asserted-Identity	[34] 9.1	c8	c8	[34] 9.1	c9	c9
17C	P-Charging-Function-Addresses	[52] 4.5	c14	c14	[52] 4.5	c15	c15
17D	P-Charging-Vector	[52] 4.6	c12	n/a	[52] 4.6	c13	n/a
17E	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c3	n/a
17F	Privacy	[33] 4.2	c10	c10	[33] 4.2	c11	c11
18	Proxy-Authorization	[26] 20.28	m	m	[26] 20.28	c4	c4
19	Proxy-Require	[26] 20.29	m	m	[26] 20.29	m	m
19A	Reason	[34A] 2	c19	c19	[34A] 2	c20	c20
20	Record-Route	[26] 20.30	m	m	[26] 20.30	c7	c7
20A	Referred-By	[59] 3	c23	c23	[59] 3	c24	c24
20B	Reject-Contact	[56B] 9.2	c21	c21	[56B] 9.2	c22	c22
20C	Request-Disposition	[56B] 9.1	c21	c21	[56B] 9.1	c22	c22
21	Require	[26] 20.32	m	m	[26] 20.32	c5	c5
22	Route	[26] 20.34	m	m	[26] 20.34	m	m
22A	Security-Client	[48] 2.3.1	x	x	[48] 2.3.1	c18	c18
22B	Security-Verify	[48] 2.3.1	x	x	[48] 2.3.1	c18	c18
23	Subscription-State	[28] 8.2.3	m	m	[28] 8.2.3	i	i
24	Supported	[26] 20.37	m	m	[26] 20.37	c6	c6
25	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
26	To	[26] 20.39	m	m	[26] 20.39	m	m
27	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
28	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.
c2:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.
c3:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.
c4:	IF A.162/8A THEN m ELSE i - - authentication between UA and proxy.
c5:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.
c6:	IF A.162/16 THEN m ELSE i - - reading the contents of the Supported header before proxying the response.
c7:	IF A.162/14 THEN (IF A.162/22 OR A.162/27 THEN m ELSE o) ELSE i - - the requirement to be able to insert itself in the subsequent transactions in a dialog or (the REFER method or SIP specific event notification).
c8:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c9:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.
c10:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c11:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.
c12:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c13:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.
c14:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c15:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.
c16:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c17:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c18:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c19:	IF A.162/48 THEN m ELSE n/a - - the Reason header field for the session initiation protocol.
c20:	IF A.162/48 THEN i ELSE n/a - - the Reason header field for the session initiation protocol.
c21:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.
c22:	IF A.162/50 THEN i ELSE n/a - - caller preferences for the session initiation protocol.
c23:	IF A.162/53 THEN i ELSE n/a - - the SIP Referred-By mechanism.
c24:	IF A.162/53 THEN m ELSE n/a - - the SIP Referred-By mechanism.
NOTE:	c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.

Prerequisite A.163/10 - - NOTIFY request

Table A.220: Supported message bodies within the NOTIFY request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	sipfrag	[37] 2	m	m	[37] 2	i	i

Prerequisite A.163/11 - - NOTIFY response

Table A.221: Supported headers within the NOTIFY response - all status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
3	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
4	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
10A	P-Access-Network-Info	[52] 4.4	c11	c11	[52] 4.4	c12	c12
10B	P-Asserted-Identity	[34] 9.1	c3	c3	[34] 9.1	c4	c4
10C	P-Charging-Function-Addresses	[52] 4.5	c9	c9	[52] 4.5	c10	c10
10D	P-Charging-Vector	[52] 4.6	c7	n/a	[52] 4.6	c8	n/a
10E	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c2	n/a
10F	Privacy	[33] 4.2	c5	c5	[33] 4.2	c6	c6
10G	Require	[26] 20.32	m	m	[26] 20.32	c13	c13
10H	Server	[26] 20.35	m	m	[26] 20.35	i	i
11	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
12	To	[26] 20.39	m	m	[26] 20.39	m	m
12A	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
13	Via	[26] 20.42	m	m	[26] 20.42	m	m
14	Warning	[26] 20.43	m	m	[26] 20.43	i	i
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						
c2:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.						
c3:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c4:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.						
c5:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c6:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c7:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c8:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.						
c9:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c10:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.						
c11:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c12:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c13:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.						

Prerequisite A.163/11 - - NOTIFY response

Prerequisite: A.164/6 AND A.164/7 - - 2xx

Table A.222: Supported headers within the NOTIFY response

Item	Header	Sending		Receiving	
------	--------	---------	--	-----------	--

		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Authentication-Info	[26] 20.6	m	m	[26] 20.6	i	i
1A	Contact	[26] 20.10	m	m	[26] 20.10	i	i
2	Record-Route	[26] 20.30	m	m	[26] 20.30	c3	c3
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c3:	IF A.162/15 THEN m ELSE i - - the requirement to be able to use separate URIs in the upstream direction and downstream direction when record routing.						

Prerequisite A.163/11 - - NOTIFY response

Prerequisite: A.164/8 OR A.164/9 OR A.164/10 OR A.164/11 OR A.164/12 OR A.164/35 - - 3xx or 485 (Ambiguous)

Table A.223: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Contact	[26] 20.10	m	m	[26] 20.10	c1	c1
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c1:	IF A.162/19E THEN m ELSE i - - deleting Contact headers.						

Prerequisite A.163/11 - - NOTIFY response

Prerequisite: A.164/14 - - 401 (Unauthorized)

Table A.224: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
2	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
8	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/11 - - NOTIFY response

Prerequisite: A.164/17 OR A.164/23 OR A.164/30 OR A.164/36 OR A.164/42 OR A.164/45 OR A.164/50 OR A.164/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.225: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/11 - - NOTIFY response

Prerequisite: A.164/18 - - 405 (Method Not Allowed)

Table A.226: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/11 - - NOTIFY response

Prerequisite: A.164/20 - - 407 (Proxy Authentication Required)

Table A.227: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
2	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
6	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/11 - - NOTIFY response

Prerequisite: A.164/25 - - 415 (Unsupported Media Type)

Table A.228: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
3A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/11 - - NOTIFY response

Prerequisite: A.164/27 - - 420 (Bad Extension)

Table A.229: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i
5	Unsupported	[26] 20.40	m	m	[26] 20.40	c3	c3
c3:	IF A.162/18 THEN m ELSE i - - reading the contents of the Unsupported header before proxying the 420 response to a method other than REGISTER.						

Prerequisite A.163/11 - - NOTIFY response

Prerequisite: A.164/28 OR A.164/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.229A: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	c1	c1	[48] 2	n/a	n/a
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:		IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.					

Prerequisite A.163/11 - - NOTIFY response

Prerequisite: A.164/34 - - 484 (Address Incomplete)

Table A.230: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/11 - - NOTIFY response

Prerequisite: A.164/39 - - 489 (Bad Event)

Table A.231: Supported headers within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
c1:		IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.					
NOTE:		c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.					

Prerequisite A.163/11 - - NOTIFY response

Table A.232: Supported message bodies within the NOTIFY response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.2.4.9 OPTIONS method

Prerequisite A.163/12 - - OPTIONS request

Table A.233: Supported headers within the OPTIONS request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
1A	Accept-Contact	[56B] 9.2	c28	c28	[56B] 9.2	c28	c29
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
3A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
5	Authorization	[26] 20.7	m	m	[26] 20.7	i	i
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
7	Call-Info	[26] 20.9	m	m	[26] 20.9	c4	c4
8	Contact	[26] 20.10	m	m	[26] 20.10	i	i
9	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
10	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
11	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
12	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
13	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
14	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
15	Date	[26] 20.17	m	m	[26] 20.17	c2	c2
16	From	[26] 20.20	m	m	[26] 20.20	m	m
17	Max-Forwards	[26] 20.22	m	m	[26] 20.22	m	m
18	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
19	Organization	[26] 20.25	m	m	[26] 20.25	c3	c3
19A	P-Access-Network-Info	[52] 4.4	c23	c23	[52] 4.4	c24	c24
19B	P-Asserted-Identity	[34] 9.1	c10	c10	[34] 9.1	c11	c11
19C	P-Called-Party-ID	[52] 4.2	c14	c14	[52] 4.2	c15	c16
19D	P-Charging-Function-Addresses	[52] 4.5	c21	c21	[52] 4.5	c22	c22
19E	P-Charging-Vector	[52] 4.6	c19	c19	[52] 4.6	c20	c20
19F	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c9	c9
19G	P-Visited-Network-ID	[52] 4.3	c17	n/a	[52] 4.3	c18	n/a
19H	Privacy	[33] 4.2	c12	c12	[33] 4.2	c13	c13
20	Proxy-Authorization	[26] 20.28	m	m	[26] 20.28	c8	c8
21	Proxy-Require	[26] 20.29	m	m	[26] 20.29	m	m
21A	Reason	[34A] 2	c26	c26	[34A] 2	c27	c27
22	Record-Route	[26] 20.30	m	m	[26] 20.30	c7	c7
22A	Referred-By	[59] 3	c30	c30	[59] 3	c31	c31
22B	Reject-Contact	[56B] 9.2	c28	c28	[56B] 9.2	c28	c29
22C	Request-Disposition	[56B] 9.1	c28	c28	[56B] 9.1	c28	c28
23	Require	[26] 20.32	m	m	[26] 20.32	c5	c5
24	Route	[26] 20.34	m	m	[26] 20.34	m	m
24A	Security-Client	[48] 2.3.1	x	x	[48] 2.3.1	c25	c25
24B	Security-Verify	[48] 2.3.1	x	x	[48] 2.3.1	c25	c25
25	Supported	[26] 20.37	m	m	[26] 20.37	c6	c6
26	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
27	To	[26] 20.39	m	m	[26] 20.39	m	m
28	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
29	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.
c2:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.
c3:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.
c4:	IF A.162/19C OR A.162/19D THEN m ELSE i - - reading, adding or concatenating the Call-Info header.
c5:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.
c6:	IF A.162/16 THEN m ELSE i - - reading the contents of the Supported header before proxying the response.
c7:	IF A.162/14 THEN o ELSE i - - the requirement to be able to insert itself in the subsequent transactions in a dialog.
c8:	IF A.162/8A THEN m ELSE i - - authentication between UA and proxy.
c9:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.
c10:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c11:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.
c12:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c13:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.
c14:	IF A.162/37 THEN m ELSE n/a - - the P-Called-Party-ID header extension.
c15:	IF A.162/37 THEN i ELSE n/a - - the P-Called-Party-ID header extension.
c16:	IF A.162/37 AND A.3/2 THEN m ELSE IF A.162/37 AND A.3/3 THEN i ELSE n/a - - the P-Called-Party-ID header extension and P-CSCF or I-CSCF.
c17:	IF A.162/38 THEN m ELSE n/a - - the P-Visited-Network-ID header extension.
c18:	IF A.162/39 THEN m ELSE i - - reading, or deleting the P-Visited-Network-ID header before proxying the request or response.
c19:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c20:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.
c21:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c22:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.
c23:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c24:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c25:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c26:	IF A.162/48 THEN m ELSE n/a - - the Reason header field for the session initiation protocol.
c27:	IF A.162/48 THEN i ELSE n/a - - the Reason header field for the session initiation protocol.
c28:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.
c29:	IF A.162/50 AND A.4/3 THEN m ELSE IF A.162/50 AND NOT A.4/3 THEN i ELSE n/a - - caller preferences for the session initiation protocol, and S-CSCF.
c30:	IF A.162/53 THEN i ELSE n/a - - the SIP Referred-By mechanism.
c31:	IF A.162/53 THEN m ELSE n/a - - the SIP Referred-By mechanism.
NOTE:	c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.

Prerequisite A.163/12 - - OPTIONS request

Table A.234: Supported message bodies within the OPTIONS request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.163/13 - - OPTIONS response

Prerequisite: A.164/1 - - 100 (Trying)

Table A.235: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
3	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
4	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
5	From	[26] 20.20	m	m	[26] 20.20	m	m
6	To	[26] 20.39	m	m	[26] 20.39	m	m
7	Via	[26] 20.42	m	m	[26] 20.42	m	m
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						

Prerequisite A.163/13 - - OPTIONS response

Table A.236: Supported headers within the OPTIONS response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
1A	Call-Info	[26] 20.9	m	m	[26] 20.9	c3	c3
2	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
3	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
4	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
11	Organization	[26] 20.25	m	m	[26] 20.25	c2	c2
11A	P-Access-Network-Info	[52] 4.4	c13	c13	[52] 4.4	c14	c14
11B	P-Asserted-Identity	[34] 9.1	c5	c5	[34] 9.1	c6	c6
11C	P-Charging-Function-Addresses	[52] 4.5	c11	c11	[52] 4.5	c12	c12
11D	P-Charging-Vector	[52] 4.6	c9	c9	[52] 4.6	c10	c10
11E	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c4	n/a
11F	Privacy	[33] 4.2	c7	c7	[33] 4.2	c8	c8
11G	Require	[26] 20.32	m	m	[26] 20.32	c15	c15
11H	Server	[26] 20.35	m	m	[26] 20.35	i	i
12	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
13	To	[26] 20.39	m	m	[26] 20.39	m	m
13A	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
14	Via	[26] 20.42	m	m	[26] 20.42	m	m
15	Warning	[26] 20.43	m	m	[26] 20.43	i	i
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						
c2:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.						
c3:	IF A.162/19C OR A.162/19D THEN m ELSE i - - reading, adding or concatenating the Call-Info header.						
c4:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.						
c5:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c6:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.						
c7:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c8:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c9:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c10:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.						
c11:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c12:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.						
c13:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c14:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c15:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.						

Prerequisite A.163/13 - - OPTIONS response

Prerequisite: A.164/6 - - 2xx

Table A.237: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
2	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Authentication-Info	[26] 20.6	m	m	[26] 20.6	i	i
5	Contact	[26] 20.10	m	m	[26] 20.10	i	i
9	Record-Route	[26] 20.30	m	m	[26] 20.30	c3	c3
12	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c3:	IF A.162/15 THEN o ELSE i - - the requirement to be able to use separate URIs in the upstream direction and downstream direction when record routing.						

Prerequisite A.163/13 - - OPTIONS response

Prerequisite: A.164/8 OR A.164/9 OR A.164/10 OR A.164/11 OR A.164/12 OR A.164/35 - - 3xx or 485 (Ambiguous)

Table A.238: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Contact	[26] 20.10	m	m	[26] 20.10	c1	c1
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c1:	IF A.162/19E THEN m ELSE i - - deleting Contact headers.						

Prerequisite A.163/13 - - OPTIONS response

Prerequisite: A.164/14 - - 401 (Unauthorized)

Table A.239: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i
10	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/13 - - OPTIONS response

Prerequisite: A.164/17 OR A.164/23 OR A.164/30 OR A.164/36 OR A.164/42 OR A.164/45 OR A.164/50 OR A.164/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.240: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
5	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/13 - - OPTIONS response

Prerequisite: A.164/18 - - 405 (Method Not Allowed)

Table A.241: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/13 - - OPTIONS response

Prerequisite: A.164/20 - - 407 (Proxy Authentication Required)

Table A.242: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i
8	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/13 - - OPTIONS response

Prerequisite: A.164/25 - - 415 (Unsupported Media Type)

Table A.243: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
4	Allow	[26] 20.5	m	m	[26] 20.5	i	i
5	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
8	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/13 - - OPTIONS response

Prerequisite: A.164/27 - - 420 (Bad Extension)

Table A.244: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
6	Supported	[26] 20.37	m	m	[26] 20.37	i	i
7	Unsupported	[26] 20.40	m	m	[26] 20.40	c3	c3
c3:	IF A.162/18 THEN m ELSE i - - reading the contents of the Unsupported header before proxying the 420 response to a method other than REGISTER.						

Prerequisite A.163/13 - - OPTIONS response

Prerequisite: A.164/28 OR A.164/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.244A: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	c1	c1	[48] 2	n/a	n/a
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:		IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.					

Prerequisite A.163/13 - - OPTIONS response

Prerequisite: A.164/34 - - 484 (Address Incomplete)

Table A.245: Supported headers within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/13 - - OPTIONS response

Table A.246: Supported message bodies within the OPTIONS response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.2.4.10 PRACK method

Prerequisite A.163/14 - - PRACK request

Table A.247: Supported headers within the PRACK request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
1A	Accept-Contact	[56B] 9.2	c18	c18	[56B] 9.2	c19	c19
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
3A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
5	Authorization	[26] 20.7	m	m	[26] 20.7	i	i
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
7	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	c3
8	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	c3
9	Content-Language	[26] 20.13	m	m	[26] 20.13	i	c3
10	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
11	Content-Type	[26] 20.15	m	m	[26] 20.15	i	c3
12	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
13	Date	[26] 20.17	m	m	[26] 20.17	c2	c2
14	From	[26] 20.20	m	m	[26] 20.20	m	m
15	Max-Forwards	[26] 20.22	m	m	[26] 20.22	m	m
16	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	c3
16A	P-Access-Network-Info	[52] 4.4	c14	c14	[52] 4.4	c15	c15
16B	P-Charging-Function-Addresses	[52] 4.5	c12	c12	[52] 4.5	c13	c13
16C	P-Charging-Vector	[52] 4.6	c10	n/a	[52] 4.6	c11	n/a
16D	Privacy	[33] 4.2	c8	c8	[33] 4.2	c9	c9
17	Proxy-Authorization	[26] 20.28	m	m	[26] 20.28	c4	c4
18	Proxy-Require	[26] 20.29	m	m	[26] 20.29	m	m
19	Rack	[27] 7.2	m	m	[27] 7.2	i	i
19A	Reason	[34A] 2	c16	c16	[34A] 2	c17	c17
20	Record-Route	[26] 20.30	m	m	[26] 20.30	c7	c7
20A	Referred-By	[59] 3	c20	c20	[59] 3	c21	c21
20B	Reject-Contact	[56B] 9.2	c18	c18	[56B] 9.2	c19	c19
20C	Request-Disposition	[56B] 9.1	c18	c18	[56B] 9.1	c19	c19
21	Require	[26] 20.32	m	m	[26] 20.32	c5	c5
22	Route	[26] 20.34	m	m	[26] 20.34	m	m
23	Supported	[26] 20.37	m	m	[26] 20.37	c6	c6
24	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
25	To	[26] 20.39	m	m	[26] 20.39	m	m
26	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
27	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.
c2:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.
c3:	IF A.3/2 OR A.3/4 THEN m ELSE i - - P-CSCF or S-CSCF.
c4:	IF A.162/8A THEN m ELSE i - - authentication between UA and proxy.
c5:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.
c6:	IF A.162/16 THEN m ELSE i - - reading the contents of the Supported header before proxying the response.
c7:	IF A.162/14 THEN 0 ELSE i - - the requirement to be able to insert itself in the subsequent transactions in a dialog.
c8:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c9:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.
c10:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c11:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.
c12:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c13:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.
c14:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c15:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c16:	IF A.162/48 THEN m ELSE n/a - - the Reason header field for the session initiation protocol.
c17:	IF A.162/48 THEN i ELSE n/a - - the Reason header field for the session initiation protocol.
c18:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.
c19:	IF A.162/50 THEN i ELSE n/a - - caller preferences for the session initiation protocol.
c20:	IF A.162/53 THEN i ELSE n/a - - the SIP Referred-By mechanism.
c21:	IF A.162/53 THEN m ELSE n/a - - the SIP Referred-By mechanism.
NOTE:	c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.

Prerequisite A.163/14 - - PRACK request

Table A.248: Supported message bodies within the PRACK request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.163/15 - - PRACK response

Prerequisite: A.164/1 - - 100 (Trying)

Table A.249: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
3	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
4	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
5	From	[26] 20.20	m	m	[26] 20.20	m	m
6	To	[26] 20.39	m	m	[26] 20.39	m	m
7	Via	[26] 20.42	m	m	[26] 20.42	m	m
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						

Prerequisite A.163/15 - - PRACK response

Table A.250: Supported headers within the PRACK response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	c2
3	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	c2
4	Content-Language	[26] 20.13	m	m	[26] 20.13	i	c2
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	i	c2
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	c2
10A	P-Access-Network-Info	[52] 4.4	c9	c9	[52] 4.4	c10	c10
10B	P-Charging-Function-Addresses	[52] 4.5	c7	c7	[52] 4.5	c8	c8
10C	P-Charging-Vector	[52] 4.6	c5	n/a	[52] 4.6	c6	n/a
10D	Privacy	[33] 4.2	c3	c3	[33] 4.2	c4	c4
10E	Require	[26] 20.32	m	m	[26] 20.32	c11	c11
10F	Server	[26] 20.35	m	m	[26] 20.35	i	i
11	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
12	To	[26] 20.39	m	m	[26] 20.39	m	m
12A	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
13	Via	[26] 20.42	m	m	[26] 20.42	m	m
14	Warning	[26] 20.43	m	m	[26] 20.43	i	i
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						
c2:	IF A.3/2 OR A.3/4 THEN m ELSE i - - P-CSCF or S-CSCF.						
c3:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c4:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c5:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c6:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.						
c7:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c8:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.						
c9:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c10:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c11:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.						

Prerequisite A.163/15 - - PRACK response

Prerequisite: A.164/6 - - 2xx

Table A.251: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
0B	Authentication-Info	[26] 20.6	m	m	[26] 20.6	i	i
1	Record-Route	[26] 20.30	m	m	[26] 20.30	c3	c3
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i

c3:	IF A.162/15 THEN o ELSE i - - the requirement to be able to use separate URIs in the upstream direction and downstream direction when record routing.
-----	---

Prerequisite A.163/15 - - PRACK response

Prerequisite: A.164/8 OR A.164/9 OR A.164/10 OR A.164/11 OR A.164/12 OR A.164/35 - - 3xx or 485 (Ambiguous)

Table A.252: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Contact	[26] 20.10	m	m	[26] 20.10	c1	c1
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c1:	IF A.162/19E THEN m ELSE i - - deleting Contact headers.						

Prerequisite A.163/15 - - PRACK response

Prerequisite: A.164/14 - - 401 (Unauthorized)

Table A.253: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
2	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
8	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/15 - - PRACK response

Prerequisite: A.164/17 OR A.164/23 OR A.164/30 OR A.164/36 OR A.164/42 OR A.164/45 OR A.164/50 OR A.164/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.254: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/15 - - PRACK response

Prerequisite: A.164/18 - - 405 (Method Not Allowed)

Table A.255: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/15 - - PRACK response

Prerequisite: A.164/20 - - 407 (Proxy Authentication Required)

Table A.256: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
2	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
6	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/15 - - PRACK response

Prerequisite: A.164/25 - - 415 (Unsupported Media Type)

Table A.257: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
3A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/15 - - PRACK response

Prerequisite: A.164/27 - - 420 (Bad Extension)

Table A.258: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/15 - - PRACK response

Prerequisite: A.164/28 OR A.164/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.258A: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	c1	c1	[48] 2	n/a	n/a
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						

Prerequisite A.163/15 - - PRACK response

Prerequisite: A.164/34 - - 484 (Address Incomplete)

Table A.259: Supported headers within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/15 - - PRACK response

Table A.260: Supported message bodies within the PRACK response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.2.4.10A PUBLISH method

Editor's note: The base draft does not yet contain an analysis of header usage within this method, and therefore this clause will have to be reviewed and completed when such an analysis is available.

Prerequisite A.163/15A - - PUBLISH request

Table A.260A: Supported headers within the PUBLISH request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept-Contact	[56B] 9.2	c28	c28	[56B] 9.2	c28	c29
2	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c29	c29
4	Authorization	[26] 20.7	m	m	[26] 20.7	i	i
5	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
6	Call-Info	[26] 24.9	m	m	[26] 24.9	c4	c4
7	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
8	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
9	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
10	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
11	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
12	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
13	Date	[26] 20.17	m	m	[26] 20.17	c2	c2
14	Event	[70] 4, 6	m	m	[70] 4, 6	m	m
15	Expires	[26] 20.19, [70] 4, 5, 6	m	m	[26] 20.19, [70] 4, 5, 6	i	i
16	From	[26] 20.20	m	m	[26] 20.20	m	m
17	In-Reply-To	[26] 20.21	m	m	[26] 20.21	i	i
18	Max-Forwards	[26] 20.22	m	m	[26] 20.22	m	m
19	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
20	Organization	[26] 20.25	m	m	[26] 20.25	c3	c3
21	P-Access-Network-Info	[52] 4.4	c23	c23	[52] 4.4	c24	c24
22	P-Asserted-Identity	[34] 9.1	c10	c10	[34] 9.1	c11	c11

23	P-Called-Party-ID	[52] 4.2	c14	c14	[52] 4.2	c15	c16
24	P-Charging-Function-Addresses	[52] 4.5	c21	c21	[52] 4.5	c22	c22
25	P-Charging-Vector	[52] 4.6	c19	c19	[52] 4.6	c20	c20
26	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c9	c9

27	P-Visited-Network-ID	[52] 4.3	c17	n/a	[52] 4.3	c18	n/a
28	Priorità	[26] 20.26	m	m	[26] 20.26	i	i
29	Privacy	[33] 4.2	c12	c12	[33] 4.2	c13	c13
30	Proxy-Authorization	[26] 20.28	m	m	[26] 20.28	c7	c7
31	Proxy-Require	[26] 20.29	m	m	[26] 20.29	m	m
32	Reason	[34A] 2	c8	c8	[34A] 2	c1	c1
33	Referred-By	[59] 3	c30	c30	[59] 3	c31	c31
34	Reject-Contact	[56B] 9.2	c27	c27	[56B] 9.2	c27	c28
34A	Reply-To	[26] 20.31	m	m	[26] 20.31	i	i
35	Request-Disposition	[56B] 9.1	c27	c27	[56B] 9.1	c27	c27
36	Require	[26] 20.32	m	m	[26] 20.32	c5	c5
37	Route	[26] 20.34	m	m	[26] 20.34	m	m
38	Security-Client	[48] 2.3.1	x	x	[48] 2.3.1	c25	c25
39	Security-Verify	[48] 2.3.1	x	x	[48] 2.3.1	c26	c26
40	SIP-If-Match	[70] 11.3.2	m	m	[70] 11.3.2	i	i
41	Subject	[26] 20.36	m	m	[26] 20.36	i	i
42	Supported	[26] 20.37	m	m	[26] 20.37	c6	c6
43	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
44	To	[26] 20.39	m	m	[26] 20.39	m	m
45	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
46	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.162/48 THEN i ELSE n/a - - the Reason header field for the session initiation protocol.
c2:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.
c3:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.
c4:	IF A.162/19C OR A.162/19D THEN m ELSE i - - reading, adding or concatenating the Call-Info header.
c5:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.
c6:	IF A.162/16 THEN m ELSE i - - reading the contents of the Supported header before proxying the response.
c7:	IF A.162/8A THEN m ELSE i - - authentication between UA and proxy.
c8:	IF A.162/48 THEN m ELSE n/a - - the Reason header field for the session initiation protocol.
c9:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.
c10:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c11:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.
c12:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c13:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.
c14:	IF A.162/37 THEN m ELSE n/a - - the P-Called-Party-ID header extension.
c15:	IF A.162/37 THEN i ELSE n/a - - the P-Called-Party-ID header extension.
c16:	IF A.162/37 AND A.3/2 THEN m ELSE IF A.162/37 AND A.3/3 THEN i ELSE n/a - - the P-Called-Party-ID header extension and P-CSCF or I-CSCF.
c17:	IF A.162/38 THEN m ELSE n/a - - the P-Visited-Network-ID header extension.
c18:	IF A.162/39 THEN m ELSE i - - reading, or deleting the P-Visited-Network-ID header before proxying the request or response.
c19:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c20:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.
c21:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c22:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.
c23:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c24:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c25:	IF A.162/47 THEN o ELSE n/a - - security mechanism agreement for the session initiation protocol (note 1).
c26:	IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c27:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.
c28:	IF A.162/50 AND A.4/3 THEN m ELSE IF A.162/50 AND NOT A.4/3 THEN i ELSE n/a - - caller preferences for the session initiation protocol, and S-CSCF.
c29:	IF A.4/20 THEN m ELSE i - - SIP specific event notification extension (note 2).
c30:	IF A.162/53 THEN i ELSE n/a - - the SIP Referred-By mechanism.
c31:	IF A.162/53 THEN m ELSE n/a - - the SIP Referred-By mechanism.
NOTE 1:	Support of this header in this method is dependent on the security mechanism and the security architecture which is implemented.
NOTE 2:	c29 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.

Prerequisite A.163/15A - - PUBLISH request

Table A.260B: Supported message bodies within the PUBLISH request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.163/15B - - PUBLISH response

Table A.260C: Supported headers within the PUBLISH response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Call-Info	[26] 24.9	m	m	[26] 24.9	c3	c3
3	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
4	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
5	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
6	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
7	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
8	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
9	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
10	From	[26] 20.20	m	m	[26] 20.20	m	m
11	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
12	Organization	[26] 20.25	m	m	[26] 20.25	c2	c2
13	P-Access-Network-Info	[52] 4.4	c13	c13	[52] 4.4	c14	c14
14	P-Asserted-Identity	[34] 9.1	c5	c5	[34] 9.1	c6	c6
15	P-Charging-Function-Addresses	[52] 4.5	c11	c11	[52] 4.5	c12	c12
16	P-Charging-Vector	[52] 4.6	c9	n/a	[52] 4.6	c10	n/a
17	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c4	n/a
18	Privacy	[33] 4.2	c7	c7	[33] 4.2	c8	c8
19	Require	[26] 20.32	m	m	[26] 20.32	c15	c15
20	Server	[26] 20.35	m	m	[26] 20.35	i	i
21	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
22	To	[26] 20.39	m	m	[26] 20.39	m	m
23	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
24	Via	[26] 20.42	m	m	[26] 20.42	m	m
25	Warning	[26] 20.43	m	m	[26] 20.43	i	i
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						
c2:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.						
c3:	IF A.162/19C OR A.162/19D THEN m ELSE i - - reading, adding or concatenating the Call-Info header.						
c4:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.						
c5:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c6:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.						
c7:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c8:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c9:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c10:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.						
c11:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c12:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.						
c13:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c14:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c15:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.						

Prerequisite A.163/15B - - PUBLISH response

Prerequisite: A.164/7 - - 200 (OK)

Table A.260D: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Authentication-Info	[26] 20.6	m	m	[26] 20.6	i	i
3	Expires	[26] 20.19, [70] 4, 5, 6	m	m	[26] 20.19, [70] 4, 5, 6	i	i
4	SIP-Etag	[70] 11.3.1	m	m	[70] 11.3.1	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/15B - - PUBLISH response

Prerequisite: A.164/8 OR A.164/9 OR A.164/10 OR A.164/11 OR A.164/12 OR A.164/35 - - 3xx or 485 (Ambiguous)

Table A.260E: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Contact	[26] 20.10	m	m	[26] 20.10	c1	c1
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c1:	IF A.162/19E THEN m ELSE i - - deleting Contact headers.						

Prerequisite A.163/15B - - PUBLISH response

Prerequisite: A.164/8 OR A.164/9 OR A.164/10 OR A.164/11 OR A.164/12 - - 401 (Unauthorized)

Table A.260F: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i
5	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/15B - - PUBLISH response

Prerequisite: A.164/17 OR A.164/23 OR A.164/30 OR A.164/36 OR A.164/42 OR A.164/45 OR A.164/50 OR A.164/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.260G: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/15B - - PUBLISH response

Prerequisite: A.164/18 -- 405 (Method Not Allowed)

Table A.260H: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/15B - - PUBLISH response

Prerequisite: A.164/20 - - 407 (Proxy Authentication Required)

Table A.260I: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i
5	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/15B - - PUBLISH response

Prerequisite: A.164/25 -- 415 (Unsupported Media Type)

Table A.260J: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
4	Allow	[26] 20.5	m	m	[26] 20.5	i	i
5	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
6	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/15B - - PUBLISH response

Prerequisite: A.164/27 - - 420 (Bad Extension)

Table A.260K: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Supported	[26] 20.37	m	m	[26] 20.37	i	i
4	Unsupported	[26] 20.40	m	m	[26] 20.40	c3	c3
c3:	IF A.162/18 THEN m ELSE i - - reading the contents of the Unsupported header before proxying the 420 response to a method other than REGISTER.						

Prerequisite A.163/15B - - PUBLISH response

Prerequisite: A.164/28 OR A.164/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.260L: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	c1	c1	[48] 2	n/a	n/a
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:		IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.					

Prerequisite A.163/15B - - PUBLISH response

Prerequisite: A.164/29 - - 423 (Interval Too Brief)

Table A.260M: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	o		[26] 20.18	o	
3	Min-Expires	[26] 20.23, [70] 5, 6	m	m	[26] 20.23, [70] 5, 6	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/15B - - PUBLISH response

Prerequisite: A.164/34 - - 484 (Address Incomplete)

Table A.260N: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/15B - - PUBLISH response

Prerequisite: A.164/39 - - 489

Table A.260O: Supported headers within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Allow-Events	[28] 8.2.2	m	m	[28] 8.2.2	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i

Prerequisite A.163/17 - - PUBLISH response

Table A.260P: Supported message bodies within the PUBLISH response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.2.4.11 REFER method

Prerequisite A.163/16 - - REFER request

Table A.261: Supported headers within the REFER request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Accept	[26] 20.1	m	m	[26] 20.1	i	i
0B	Accept-Contact	[56B] 9.2	c27	c27	[56B] 9.2	c27	c28
0C	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
1	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
1A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
3	Authorization	[26] 20.7	m	m	[26] 20.7	i	i
4	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
5	Contact	[26] 20.10	m	m	[26] 20.10	i	i
5A	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
5B	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
5C	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
6	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
7	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
8	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
9	Date	[26] 20.17	m	m	[26] 20.17	c2	c2
10	Expires	[26] 20.19	m	m	[26] 20.19	i	i
11	From	[26] 20.20	m	m	[26] 20.20	m	m
12	Max-Forwards	[26] 20.22	m	m	[26] 20.22	m	m
13	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
14	Organization	[26] 20.25	m	m	[26] 20.25	c3	c3
14A	P-Access-Network-Info	[52] 4.4	c22	c22	[52] 4.4	c23	c23
14B	P-Asserted-Identity	[34] 9.1	c9	c9	[34] 9.1	c10	c10
14C	P-Called-Party-ID	[52] 4.2	c13	c13	[52] 4.2	c14	c15
14D	P-Charging-Function-Addresses	[52] 4.5	c20	c20	[52] 4.5	c21	c21
14E	P-Charging-Vector	[52] 4.6	c18	c18	[52] 4.6	c19	c19
14F	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c8	c8
14G	P-Visited-Network-ID	[52] 4.3	c16	n/a	[52] 4.3	c17	n/a
14H	Privacy	[33] 4.2	c11	c11	[33] 4.2	c12	c12
15	Proxy-Authorization	[26] 20.28	m	m	[26] 20.28	c4	c4
16	Proxy-Require	[26] 20.29	m	m	[26] 20.29	m	m
16A	Reason	[34A] 2	c25	c25	[34A] 2	c26	c26
17	Record-Route	[26] 20.30	m	m	[26] 20.30	c7	c7
18	Refer-To	[36] 3	c3	c3	[36] 3	c4	c4
18A	Referred-By	[59] 3	c29	c29	[59] 3	c30	c30
18B	Reject-Contact	[56B] 9.2	c27	c27	[56B] 9.2	c27	c28
18C	Request-Disposition	[56B] 9.1	c27	c27	[56B] 9.1	c27	c27
19	Require	[26] 20.32	m	m	[26] 20.32	c5	c5
20	Route	[26] 20.34	m	m	[26] 20.34	m	m
20A	Security-Client	[48] 2.3.1	x	x	[48] 2.3.1	c24	c24
20B	Security-Verify	[48] 2.3.1	x	x	[48] 2.3.1	c24	c24
20C	Subject	[26] 20.36	m	m	[26] 20.36	i	i
21	Supported	[26] 20.37	m	m	[26] 20.37	c6	c6
22	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
23	To	[26] 20.39	m	m	[26] 20.39	m	m
24	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
25	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.
c2:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.
c3:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.
c4:	IF A.162/8A THEN m ELSE i - - authentication between UA and proxy.
c5:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.
c6:	IF A.162/16 THEN m ELSE i - - reading the contents of the Supported header before proxying the response.
c7:	IF A.162/14 THEN m ELSE i - - the requirement to be able to insert itself in the subsequent transactions in a dialog.
c8:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.
c9:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c10:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.
c11:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c12:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.
c13:	IF A.162/37 THEN m ELSE n/a - - the P-Called-Party-ID header extension.
c14:	IF A.162/37 THEN i ELSE n/a - - the P-Called-Party-ID header extension.
c15:	IF A.162/37 AND A.3/2 THEN m ELSE IF A.162/37 AND A.3/3 THEN i ELSE n/a - - the P-Called-Party-ID header extension and P-CSCF or I-CSCF.
c16:	IF A.162/38 THEN m ELSE n/a - - the P-Visited-Network-ID header extension.
c17:	IF A.162/39 THEN m ELSE i - - reading, or deleting the P-Visited-Network-ID header before proxying the request or response.
c18:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c19:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.
c20:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c21:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.
c22:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c23:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c24:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c25:	IF A.162/48 THEN m ELSE n/a - - the Reason header field for the session initiation protocol.
c26:	IF A.162/48 THEN i ELSE n/a - - the Reason header field for the session initiation protocol.
c27:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.
c28:	IF A.162/50 AND A.4/3 THEN m ELSE IF A.162/50 AND NOT A.4/3 THEN i ELSE n/a - - caller preferences for the session initiation protocol, and S-CSCF.
c29:	IF A.162/53 THEN i ELSE n/a - - the SIP Referred-By mechanism.
c30:	IF A.162/53 THEN m ELSE n/a - - the SIP Referred-By mechanism.
NOTE:	c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.

Prerequisite A.163/16 - - REFER request

Table A.262: Supported message bodies within the REFER request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.163/17 - - REFER response

Prerequisite: A.164/1 - - 100 (Trying)

Table A.263: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
3	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
4	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
5	From	[26] 20.20	m	m	[26] 20.20	m	m
6	To	[26] 20.39	m	m	[26] 20.39	m	m
7	Via	[26] 20.42	m	m	[26] 20.42	m	m
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						

Prerequisite A.163/17 - - REFER response

Table A.264: Supported headers within the REFER response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
1A	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
2	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
3	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
4	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
5	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
6	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
7	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
8	From	[26] 20.20	m	m	[26] 20.20	m	m
9	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
10	Organization	[26] 20.25	m	m	[26] 20.25	c2	c2
10A	P-Access-Network-Info	[52] 4.4	c12	c12	[52] 4.4	c13	c13
10B	P-Asserted-Identity	[34] 9.1	c4	c4	[34] 9.1	c5	c5
10C	P-Charging-Function-Addresses	[52] 4.5	c10	c10	[52] 4.5	c11	c11
10D	P-Charging-Vector	[52] 4.6	c8	c8	[52] 4.6	c9	c9
10E	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c3	n/a
10F	Privacy	[33] 4.2	c6	c6	[33] 4.2	c7	c7
10G	Require	[26] 20.32	m	m	[26] 20.32	c14	c14
10H	Server	[26] 20.35	m	m	[26] 20.35	i	i
11	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
12	To	[26] 20.39	m	m	[26] 20.39	m	m
12A	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
13	Via	[26] 20.42	m	m	[26] 20.42	m	m
14	Warning	[26] 20.43	m	m	[26] 20.43	i	i
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						
c2:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.						
c3:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.						
c4:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c5:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.						
c6:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c7:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c8:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c9:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.						
c10:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c11:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.						
c12:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c13:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c14:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.						

Prerequisite A.163/17 - - REFER response

Prerequisite: A.164/7 - - 202 (Accepted)

Table A.265: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Authentication-Info	[26] 20.6	m	m	[26] 20.6	i	i
3	Contact	[26] 20.10	m	m	[26] 20.10	i	i
5	Record-Route	[26] 20.30	m	m	[26] 20.30	c3	c3
8	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c3:	IF A.162/15 THEN m ELSE i - - the requirement to be able to use separate URIs in the upstream direction and downstream direction when record routing.						

Prerequisite A.163/17 - - REFER response

Prerequisite: A.164/8 OR A.164/9 OR A.164/10 OR A.164/11 OR A.164/12 OR A.164/35 - - 3xx or 485 (Ambiguous)

Table A.266: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Contact	[26] 20.10	m	m	[26] 20.10	c1	c1
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c1:	IF A.162/19E THEN m ELSE i - - deleting Contact headers.						

Prerequisite A.163/17 - - REFER response

Prerequisite: A.164/8 OR A.164/9 OR A.164/10 OR A.164/11 OR A.164/12 - - 401 (Unauthorized)

Table A.267: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i
10	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/17 - - REFER response

Prerequisite: A.164/17 OR A.164/23 OR A.164/30 OR A.164/36 OR A.164/42 OR A.164/45 OR A.164/50 OR A.164/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.268: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
6	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
8	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/17 - - REFER response

Prerequisite: A.164/18 - - 405 (Method Not Allowed)

Table A.269: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/17 - - REFER response

Prerequisite: A.164/20 - - 407 (Proxy Authentication Required)

Table A.270: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Proxy-Authenticate	[26] 20.27	o		[26] 20.27	o	
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i
8	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/17 - - REFER response

Prerequisite: A.164/25 - - 415 (Unsupported Media Type)

Table A.271: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
3A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
8	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/17 - - REFER response

Prerequisite: A.164/27 - - 420 (Bad Extension)

Table A.272: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i
8	Unsupported	[26] 20.40	m	m	[26] 20.40	c3	c3
c3:	IF A.162/18 THEN m ELSE i - - reading the contents of the Unsupported header before proxying the 420 response to a method other than REGISTER.						

Prerequisite A.163/17 - - REFER response

Prerequisite: A.164/28 OR A.164/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.272A: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	c1	c1	[48] 2	n/a	n/a
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:		IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.					

Prerequisite A.163/17 - - REFER response

Prerequisite: A.164/34 - - 484 (Address Incomplete)

Table A.273: Supported headers within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/17 - - REFER response

Table A.274: Supported message bodies within the REFER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.2.4.12 REGISTER method

Prerequisite A.163/18 - - REGISTER request

Table A.275: Supported headers within the REGISTER request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
3A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
5	Authorization	[26] 20.7, [49]	m	m	[26] 20.7, [49]	i	i
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
7	Call-Info	[26] 20.9	m	m	[26] 20.9	c2	c2
8	Contact	[26] 20.10	m	m	[26] 20.10	i	i
9	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
10	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
11	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
12	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
13	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
14	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
15	Date	[26] 20.17	m	m	[26] 20.17	m	m
16	Expires	[26] 20.19	m	m	[26] 20.19	i	i
17	From	[26] 20.20	m	m	[26] 20.20	m	m
18	Max-Forwards	[26] 20.22	m	m	[26] 20.22	m	m
19	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
20	Organization	[26] 20.25	m	m	[26] 20.25	c3	c3
20A	P-Access-Network-Info	[52] 4.4	c16	c16	[52] 4.4	c17	c17
20B	P-Charging-Function-Addresses	[52] 4.5	c14	c14	[52] 4.5	c15	c15
20C	P-Charging-Vector	[52] 4.6	c12	c12	[52] 4.6	c13	c13
20D	P-Visited-Network-ID	[52] 4.3	c10	c10	[52] 4.3	c11	c11
20E	Path	[35] 4.2	c6	c6	[35] 4.2	c6	c6
20F	Privacy	[33] 4.2	c8	c8	[33] 4.2	c9	c9
21	Proxy-Authorization	[26] 20.28	m	m	[26] 20.28	c7	c7
22	Proxy-Require	[26] 20.29	m	m	[26] 20.29	m	m
22A	Reason	[34A] 2	c19	c19	[34A] 2	c20	c20
22B	Referred-By	[59] 3	c22	c22	[59] 3	c23	c23
22C	Request-Disposition	[56B] 9.1	c21	c21	[56B] 9.1	c21	c21
23	Require	[26] 20.32	m	m	[26] 20.32	c4	c4
24	Route	[26] 20.34	m	m	[26] 20.34	m	m
24A	Security-Client	[48] 2.3.1	x	x	[48] 2.3.1	c18	c18
24B	Security-Verify	[48] 2.3.1	x	x	[48] 2.3.1	c18	c18
25	Supported	[26] 20.37	m	m	[26] 20.37	c5	c5
26	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
27	To	[26] 20.39	m	m	[26] 20.39	m	m
28	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
29	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.
c2:	IF A.162/19C OR A.162/19D THEN m ELSE i - - reading, adding or concatenating the Call-Info header.
c3:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.
c4:	IF A.162/11 OR A.162/12 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.
c5:	IF A.162/16 THEN m ELSE i - - reading the contents of the Supported header before proxying the response.
c6:	IF A.162/29 THEN m ELSE n/a - - PATH header support.
c7:	IF A.162/8A THEN m ELSE i - - authentication between UA and proxy.
c8:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c9:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.
c10:	IF A.162/38 THEN m ELSE n/a - - the P-Visited-Network-ID header extension.
c11:	IF A.162/39 THEN m ELSE i - - reading, or deleting the P-Visited-Network-ID header before proxying the request or response.
c12:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c13:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.
c14:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c15:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.
c16:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c17:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c18:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c19:	IF A.162/48 THEN m ELSE n/a - - the Reason header field for the session initiation protocol.
c20:	IF A.162/48 THEN i ELSE n/a - - the Reason header field for the session initiation protocol.
c21:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.
c22:	IF A.162/53 THEN i ELSE n/a - - the SIP Referred-By mechanism.
c23:	IF A.162/53 THEN m ELSE n/a - - the SIP Referred-By mechanism.
NOTE:	c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.

Prerequisite A.163/18 - - REGISTER request

Table A.276: Supported message bodies within the REGISTER request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.163/19 - - REGISTER response

Prerequisite: A.164/1 - - 100 (Trying)

Table A.277: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
3	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
4	Date	[26] 20.17	m	m	[26] 20.17	m	m
5	From	[26] 20.20	m	m	[26] 20.20	m	m
6	To	[26] 20.39	m	m	[26] 20.39	m	m
7	Via	[26] 20.42	m	m	[26] 20.42	m	m

Prerequisite A.163/19 - - REGISTER response

Table A.278: Supported headers within the REGISTER response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
1A	Call-Info	[26] 20.9	m	m	[26] 20.9	c2	c2
2	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
3	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
4	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	m	m	[26] 20.17	m	m
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
11	Organization	[26] 20.25	m	m	[26] 20.25	c1	c1
11A	P-Access-Network-Info	[52] 4.4	c9	c9	[52] 4.4	c10	c10
11B	P-Charging-Function-Addresses	[52] 4.5	c7	c7	[52] 4.5	c8	c8
11C	P-Charging-Vector	[52] 4.6	c5	c5	[52] 4.6	c6	c6
11D	Privacy	[33] 4.2	c3	c3	[33] 4.2	c4	c4
11E	Require	[26] 20.32	m	m	[26] 20.32	c11	c11
11F	Server	[26] 20.35	m	m	[26] 20.35	i	i
12	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
13	To	[26] 20.39	m	m	[26] 20.39	m	m
13A	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
14	Via	[26] 20.42	m	m	[26] 20.42	m	m
15	Warning	[26] 20.43	m	m	[26] 20.43	i	i
c1:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.						
c2:	IF A.162/19C OR A.162/19D THEN m ELSE i - - reading, adding or concatenating the Call-Info header.						
c3:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c4:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c5:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c6:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.						
c7:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c8:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.						
c9:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c10:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c11:	IF A.162/11 OR A.162/12 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.						

Prerequisite A.163/19 - - REGISTER response

Prerequisite: A.164/6 - - 2xx

Table A.279: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
1A	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
1B	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
2	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Authentication-Info	[26] 20.6	m	m	[26] 20.6	i	i
5	Contact	[26] 20.10	m	m	[26] 20.10	i	i
5A	P-Associated-URI	[52] 4.1	c8	c8	[52] 4.1	c9	c10
6	Path	[35] 4.2	c3	c3	[35] 4.2	c4	c4
8	Service-Route	[38] 5	c5	c5	[38] 5	c6	c7
9	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c2:	IF A.3/2 OR A.3/3A THEN m ELSE n/a - - P-CSCF or I-CSCF (THIG).						
c3:	IF A.162/29 THEN m ELSE n/a - - Path extension support.						
c4:	IF A.162/29 THEN i ELSE n/a - - Path extension support.						
c5:	IF A.162/32 THEN m ELSE n/a - - Service-Route extension support.						
c6:	IF A.162/32 THEN i ELSE n/a - - Service-Route extension support.						
c7:	IF A.162/32 THEN (IF A.3/2 THEN m ELSE i) ELSE n/a - - Service-Route extension and P-CSCF.						
c8:	IF A.162/36 THEN m ELSE n/a - - the P-Associated-URI extension.						
c9:	IF A.162/36 THEN i ELSE n/a - - the P-Associated-URI extension.						
c10:	IF A.162/36 AND A.3/2 THEN m ELSE IF A.162/36 AND A.3/3 THEN i ELSE n/a - - the P-Associated-URI extension and P-CSCF or I-CSCF.						

Prerequisite A.163/19 - - REGISTER response

Prerequisite: A.164/8 OR A.164/9 OR A.164/10 OR A.164/11 OR A.164/12 OR A.164/35 - - 3xx or 485 (Ambiguous)

Table A.280: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Contact	[26] 20.10	m	m	[26] 20.10	c2	c2
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
8	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c2:	IF A.162/19E THEN m ELSE i - - deleting Contact headers.						

Prerequisite A.163/19 - - REGISTER response

Prerequisite: A.164/14 - - 401 (Unauthorized)

Table A.281: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
6	Security-Server	[48] 2	x	c1	[48] 2	n/a	n/a
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i
10	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i
c1:	IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						

Prerequisite A.163/19 - - REGISTER response

Prerequisite: A.164/17 OR A.164/23 OR A.164/30 OR A.164/36 OR A.164/42 OR A.164/45 OR A.164/50 OR A.164/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.282: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
6	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
8	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/19 - - REGISTER response

Prerequisite: A.164/18 - - 405 (Method Not Allowed)

Table A.283: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
2	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
8	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/19 - - REGISTER response

Prerequisite: A.164/20 - - 407 (Proxy Authentication Required)

Table A.284: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
5	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
8	Supported	[26] 20.37	m	m	[26] 20.37	i	i
9	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/19 - - REGISTER response

Prerequisite: A.164/25 - - 415 (Unsupported Media Type)

Table A.285: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
4	Allow	[26] 20.5	m	m	[26] 20.5	i	i
5	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
9	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/19 - - REGISTER response

Prerequisite: A.164/27 - - 420 (Bad Extension)

Table A.286: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i
8	Unsupported	[26] 20.40	m	m	[26] 20.40	c3	c3
c3:	IF A.162/17 THEN m ELSE i						

Prerequisite A.163/19 - - REGISTER response

Prerequisite: A.164/28 OR A.164/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.286A: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	c1	c1	[48] 2	n/a	n/a
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:	IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.						

Prerequisite A.163/19 - - REGISTER response

Prerequisite: A.164/29 - - 423 (Interval Too Brief)

Table A.287: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	o		[26] 20.18	o	
5	Min-Expires	[26] 20.23	m	m	[26] 20.23	i	i
8	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/19 - - REGISTER response

Prerequisite: A.164/34 - - 484 (Address Incomplete)

Table A.288: Supported headers within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/19 - - REGISTER response

Table A.289: Supported message bodies within the REGISTER response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.2.4.13 SUBSCRIBE method

Prerequisite A.163/20 - - SUBSCRIBE request

Table A.290: Supported headers within the SUBSCRIBE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
1A	Accept-Contact	[56B] 9.2	c27	c27	[56B] 9.2	c27	c28
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
3A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
4	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
5	Authorization	[26] 20.7	m	m	[26] 20.7	i	i
6	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
6A	Contact	[26] 20.10	m	m	[26] 20.10	i	i
7	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
8	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
9	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
10	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
11	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
12	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
13	Date	[26] 20.17	m	m	[26] 20.17	c2	c2
14	Event	[28] 7.2.1	m	m	[28] 7.2.1	m	m
15	Expires	[26] 20.19	m	m	[26] 20.19	i	i
16	From	[26] 20.20	m	m	[26] 20.20	m	m
17	Max-Forwards	[26] 20.22	m	m	[26] 20.22	m	m
18	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
18A	Organization	[26] 20.25	m	m	[26] 20.25	c3	c3
18B	P-Access-Network-Info	[52] 4.4	c22	c22	[52] 4.4	c23	c23
18C	P-Asserted-Identity	[34] 9.1	c9	c9	[34] 9.1	c10	c10
18D	P-Called-Party-ID	[52] 4.2	c13	c13	[52] 4.2	c14	c15
18E	P-Charging-Function-Addresses	[52] 4.5	c20	c20	[52] 4.5	c21	c21
18F	P-Charging-Vector	[52] 4.6	c18	c18	[52] 4.6	c19	c19
18G	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c8	c8
18H	P-Visited-Network-ID	[52] 4.3	c16	n/a	[52] 4.3	c17	n/a
18I	Privacy	[33] 4.2	c11	c11	[33] 4.2	c12	c12
19	Proxy-Authorization	[26] 20.28	m	m	[26] 20.28	c4	c4
20	Proxy-Require	[26] 20.29	m	m	[26] 20.29	m	m
20A	Reason	[34A] 2	c25	c25	[34A] 2	c26	c26
21	Record-Route	[26] 20.30	m	m	[26] 20.30	c7	c7
21A	Referred-By	[59] 3	c29	c29	[59] 3	c30	c30
21B	Reject-Contact	[56B] 9.2	c27	c27	[56B] 9.2	c27	c28
21C	Request-Disposition	[56B] 9.1	c27	c27	[56B] 9.1	c27	c27
22	Require	[26] 20.32	m	m	[26] 20.32	c5	c5
23	Route	[26] 20.34	m	m	[26] 20.34	m	m
23A	Security-Client	[48] 2.3.1	x	x	[48] 2.3.1	c24	c24
23B	Security-Verify	[48] 2.3.1	x	x	[48] 2.3.1	c24	c24
24	Supported	[26] 20.37	m	m	[26] 20.37	c6	c6
25	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
26	To	[26] 20.39	m	m	[26] 20.39	m	m
27	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
28	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.
c2:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.
c3:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.
c4:	IF A.162/8A THEN m ELSE i - - authentication between UA and proxy.
c5:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.
c6:	IF A.162/16 THEN m ELSE i - - reading the contents of the Supported header before proxying the response.
c7:	IF A.162/14 THEN m ELSE i - - the requirement to be able to insert itself in the subsequent transactions in a dialog.
c8:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.
c9:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.
c10:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.
c11:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c12:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.
c13:	IF A.162/37 THEN m ELSE n/a - - the P-Called-Party-ID header extension.
c14:	IF A.162/37 THEN i ELSE n/a - - the P-Called-Party-ID header extension.
c15:	IF A.162/37 AND A.3/2 THEN m ELSE IF A.162/37 AND A.3/3 THEN i ELSE n/a - - the P-Called-Party-ID header extension and P-CSCF or I-CSCF.
c16:	IF A.162/38 THEN m ELSE n/a - - the P-Visited-Network-ID header extension.
c17:	IF A.162/39 THEN m ELSE i - - reading, or deleting the P-Visited-Network-ID header before proxying the request or response.
c18:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c19:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.
c20:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c21:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.
c22:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c23:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c24:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c25:	IF A.162/48 THEN m ELSE n/a - - the Reason header field for the session initiation protocol.
c26:	IF A.162/48 THEN i ELSE n/a - - the Reason header field for the session initiation protocol.
c27:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.
c28:	IF A.162/50 AND A.4/3 THEN m ELSE IF A.162/50 AND NOT A.4/3 THEN i ELSE n/a - - caller preferences for the session initiation protocol, and S-CSCF.
c29:	IF A.162/53 THEN i ELSE n/a - - the SIP Referred-By mechanism.
c30:	IF A.162/53 THEN m ELSE n/a - - the SIP Referred-By mechanism.
NOTE:	c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.

Prerequisite A.163/20 - - SUBSCRIBE request

Table A.291: Supported message bodies within the SUBSCRIBE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.163/21 - - SUBSCRIBE response

Table A.292: Supported headers within the SUBSCRIBE response - all status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
2	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	i
3	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	i
4	Content-Language	[26] 20.13	m	m	[26] 20.13	i	i
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	i	i
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	i
10A	Organization	[26] 20.25	m	m	[26] 20.25	c2	c2
10B	P-Access-Network-Info	[52] 4.4	c12	c12	[52] 4.4	c13	c13
10C	P-Asserted-Identity	[34] 9.1	c4	c4	[34] 9.1	c5	c5
10D	P-Charging-Function-Addresses	[52] 4.5	c10	c10	[52] 4.5	c11	c11
10E	P-Charging-Vector	[52] 4.6	c8	c8	[52] 4.6	c9	c9
10F	P-Preferred-Identity	[34] 9.2	x	x	[34] 9.2	c3	n/a
10G	Privacy	[33] 4.2	c6	c6	[33] 4.2	c7	c7
10H	Require	[26] 20.32	m	m	[26] 20.32	c14	c14
10I	Server	[26] 20.35	m	m	[26] 20.35	i	i
11	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
12	To	[26] 20.39	m	m	[26] 20.39	m	m
12A	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
13	Via	[26] 20.42	m	m	[26] 20.42	m	m
14	Warning	[26] 20.43	m	m	[26] 20.43	i	i
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						
c2:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.						
c3:	IF A.162/30A THEN m ELSE n/a - - act as first entity within the trust domain for asserted identity.						
c4:	IF A.162/30 THEN m ELSE n/a - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks.						
c5:	IF A.162/30A or A.162/30B THEN m ELSE i - - extensions to the Session Initiation Protocol (SIP) for asserted identity within trusted networks or subsequent entity within trust network that can route outside the trust network.						
c6:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c7:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c8:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c9:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.						
c10:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c11:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.						
c12:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c13:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c14:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.						

Prerequisite A.163/21 - - SUBSCRIBE response

Prerequisite: A.164/6 AND A.164/7 - - 2xx

Table A.293: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Authentication-Info	[26] 20.6	m	m	[26] 20.6	i	i
1A	Contact	[26] 20.10	m	m	[26] 20.10	i	i
2	Expires	[26] 20.19	m	m	[26] 20.19	i	i
3	Record-Route	[26] 20.30	m	m	[26] 20.30	c3	c3
6	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c3:	IF A.162/15 THEN m ELSE i - - the requirement to be able to use separate URIs in the upstream direction and downstream direction when record routing.						

Prerequisite A.163/21 - - SUBSCRIBE response

Prerequisite: A.164/8 OR A.164/9 OR A.164/10 OR A.164/11 OR A.164/12 OR A.164/35 - - 3xx or 485 (Ambiguous)

Table A.294: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Contact	[26] 20.10	m	m	[26] 20.10	c1	c1
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c1:	IF A.162/19E THEN m ELSE i - - deleting Contact headers.						

Prerequisite A.163/21 - - SUBSCRIBE response

Prerequisite: A.164/14 - - 401 (Unauthorized)

Table A.295: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
2	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
8	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/21 - - SUBSCRIBE response

Prerequisite: A.164/17 OR A.164/23 OR A.164/30 OR A.164/36 OR A.164/42 OR A.164/50 OR A.164/51 - - 404, 413, 480, 486, 500, 600, 603

Table A.296: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/21 - - SUBSCRIBE response

Prerequisite: A.164/18 - - 405 (Method Not Allowed)

Table A.297: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/21 - - SUBSCRIBE response

Prerequisite: A.164/20 - - 407 (Proxy Authentication Required)

Table A.298: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
2	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
6	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/21 - - SUBSCRIBE response

Prerequisite: A.164/25 - - 415 (Unsupported Media Type)

Table A.299: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
4	Allow	[26] 20.5	m	m	[26] 20.5	i	i
5	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/21 - - SUBSCRIBE response

Prerequisite: A.164/27 - - 420 (Bad Extension)

Table A.300: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i
5	Unsupported	[26] 20.40	m	m	[26] 20.40	c3	c3
c3:	IF A.162/18 THEN m ELSE i - - reading the contents of the Unsupported header before proxying the 420 response to a method other than REGISTER.						

Prerequisite A.163/21 - - SUBSCRIBE response

Prerequisite: A.164/28 OR A.164/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.300A: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	c1	c1	[48] 2	n/a	n/a
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1:		IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.					

Prerequisite A.163/21 - - SUBSCRIBE response

Prerequisite: A.164/29 - - 423 (Interval Too Brief)

Table A.301: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
2	Min-Expires	[26] 20.23	m	m	[26] 20.23	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/21 - - SUBSCRIBE response

Prerequisite: A.164/34 - - 484 (Address Incomplete)

Table A.302: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/21 - - SUBSCRIBE response

Prerequisite: A.164/39 - - 489 (Bad Event)

Table A.303: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
c1:		IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.					
NOTE:		c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.					

Prerequisite A.163/21 - - SUBSCRIBE response

Prerequisite: A.164/45 - - 503 (Service Unavailable)

Table A.303A: Supported headers within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Allow	[26] 20.5	m	m	[26] 20.5	i	i
1	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/21 - - SUBSCRIBE response

Table A.304: Supported message bodies within the SUBSCRIBE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.2.2.4.14 UPDATE method

Prerequisite A.163/22 - - UPDATE request

Table A.305: Supported headers within the UPDATE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
1A	Accept-Contact	[56B] 9.2	c21	c21	[56B] 9.2	c22	c22
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
4	Allow	[26] 20.5	m	m	[26] 20.5	i	i
5	Allow-Events	[28] 7.2.2	m	m	[28] 7.2.2	c1	c1
6	Authorization	[26] 20.7	m	m	[26] 20.7	i	i
7	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
8	Call-Info	[26] 20.9	m	m	[26] 20.9	c8	c8
9	Contact	[26] 20.10	m	m	[26] 20.10	i	i
10	Content-Disposition	[26] 20.11	m	m	[26] 20.11	c4	c4
11	Content-Encoding	[26] 20.12	m	m	[26] 20.12	c4	c4
12	Content-Language	[26] 20.13	m	m	[26] 20.13	c4	c4
13	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
14	Content-Type	[26] 20.15	m	m	[26] 20.15	c4	c4
15	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
16	Date	[26] 20.17	m	m	[26] 20.17	c2	c2
17	From	[26] 20.20	m	m	[26] 20.20	m	m
18	Max-Forwards	[26] 20.22	m	m	[26] 20.22	m	m
19	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	c4
19A	Min-SE	[58] 5	c23	c23	[58] 5	c23	c23
20	Organization	[26] 20.25	m	m	[26] 20.25	c3	c3
20A	P-Access-Network-Info	[52] 4.4	c16	c16	[52] 4.4	c17	c17
20B	P-Charging-Function-Addresses	[52] 4.5	c14	c14	[52] 4.5	c15	c15
20C	P-Charging-Vector	[52] 4.6	c12	c12	[52] 4.6	c13	c13
20D	Privacy	[33] 4.2	c10	c10	[33] 4.2	c11	c11
21	Proxy-Authorization	[26] 20.28	m	m	[26] 20.28	c9	c9
22	Proxy-Require	[26] 20.29	m	m	[26] 20.29	m	m
22A	Reason	[34A] 2	c19	c19	[34A] 2	c20	c20
23	Record-Route	[26] 20.30	m	m	[26] 20.30	c7	c7
23A	Referred-By	[59] 3	c24	c24	[59] 3	c25	c25
23B	Reject-Contact	[56B] 9.2	c21	c21	[56B] 9.2	c22	c22
23C	Request-Disposition	[56B] 9.1	c21	c21	[56B] 9.1	c22	c22
24	Require	[26] 20.32	m	m	[26] 20.32	c5	c5
25	Route	[26] 20.34	m	m	[26] 20.34	m	m
25A	Security-Client	[48] 2.3.1	x	x	[48] 2.3.1	c18	c18
25B	Security-Verify	[48] 2.3.1	x	x	[48] 2.3.1	c18	c18
25C	Session-Expires	[58] 4	c23	c23	[58] 4	c23	c23
26	Supported	[26] 20.37	m	m	[26] 20.37	c6	c6
27	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
28	To	[26] 20.39	m	m	[26] 20.39	m	m
29	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
30	Via	[26] 20.42	m	m	[26] 20.42	m	m

c1:	IF A.4/20 THEN m ELSE i - - SIP specific event notification extension.
c2:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.
c3:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.
c4:	IF A.3/2 OR A.3/4 THEN m ELSE i - - P-CSCF or S-CSCF.
c5:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.
c6:	IF A.162/16 THEN m ELSE i - - reading the contents of the Supported header before proxying the response.
c7:	IF A.162/14 THEN o ELSE i - - the requirement to be able to insert itself in the subsequent transactions in a dialog.
c8:	IF A.162/19C OR A.162/19D THEN m ELSE i - - reading, adding or concatenating the Call-Info header.
c9:	IF A.162/8A THEN m ELSE i - - authentication between UA and proxy.
c10:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).
c11:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.
c12:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.
c13:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.
c14:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.
c15:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.
c16:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c17:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.
c18:	IF A.4/37 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.
c19:	IF A.162/48 THEN m ELSE n/a - - the Reason header field for the session initiation protocol.
c20:	IF A.162/48 THEN i ELSE n/a - - the Reason header field for the session initiation protocol.
c21:	IF A.162/50 THEN m ELSE n/a - - caller preferences for the session initiation protocol.
c22:	IF A.162/50 THEN i ELSE n/a - - caller preferences for the session initiation protocol.
c23:	IF A.162/52 THEN m ELSE n/a - - the SIP session timer.
c24:	IF A.162/53 THEN i ELSE n/a - - the SIP Referred-By mechanism.
c25:	IF A.162/53 THEN m ELSE n/a - - the SIP Referred-By mechanism.
NOTE:	c1 refers to the UA role major capability as this is the case of a proxy that also acts as a UA specifically for SUBSCRIBE and NOTIFY.

Prerequisite A.163/22 - - UPDATE request

Table A.306: Supported message bodies within the UPDATE request

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

Prerequisite A.163/22 - - UPDATE response

Table A.307: Supported headers within the UPDATE response - all remaining status-codes

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Call-ID	[26] 20.8	m	m	[26] 20.8	m	m
1A	Call-Info	[26] 20.9	m	m	[26] 20.9	c4	c4
2	Content-Disposition	[26] 20.11	m	m	[26] 20.11	i	c3
3	Content-Encoding	[26] 20.12	m	m	[26] 20.12	i	c3
4	Content-Language	[26] 20.13	m	m	[26] 20.13	i	c3
5	Content-Length	[26] 20.14	m	m	[26] 20.14	m	m
6	Content-Type	[26] 20.15	m	m	[26] 20.15	i	c3
7	Cseq	[26] 20.16	m	m	[26] 20.16	m	m
8	Date	[26] 20.17	m	m	[26] 20.17	c1	c1
9	From	[26] 20.20	m	m	[26] 20.20	m	m
10	MIME-Version	[26] 20.24	m	m	[26] 20.24	i	c3
10A	Organization	[26] 20.25	m	m	[26] 20.25	c2	c2
10B	P-Access-Network-Info	[52] 4.4	c11	c11	[52] 4.4	c12	c12
10C	P-Charging-Function-Addresses	[52] 4.5	c9	c9	[52] 4.5	c10	c10
10D	P-Charging-Vector	[52] 4.6	c7	n/a	[52] 4.6	c8	n/a
10E	Privacy	[33] 4.2	c5	c5	[33] 4.2	c6	c6
10F	Require	[26] 20.32	m	m	[26] 20.32	c13	c13
10G	Server	[26] 20.35	m	m	[26] 20.35	i	i
11	Timestamp	[26] 20.38	m	m	[26] 20.38	i	i
12	To	[26] 20.39	m	m	[26] 20.39	m	m
12A	User-Agent	[26] 20.41	m	m	[26] 20.41	i	i
13	Via	[26] 20.42	m	m	[26] 20.42	m	m
14	Warning	[26] 20.43	m	m	[26] 20.43	i	i
c1:	IF A.162/9 THEN m ELSE i - - insertion of date in requests and responses.						
c2:	IF A.162/19A OR A.162/19B THEN m ELSE i - - reading, adding or concatenating the Organization header.						
c3:	IF A.3/2 OR A.3/4 THEN m ELSE i - - P-CSCF or S-CSCF.						
c4:	IF A.162/19C OR A.162/19D THEN m ELSE i - - reading, adding or concatenating the Call-Info header.						
c5:	IF A.162/31 THEN m ELSE n/a - - a privacy mechanism for the Session Initiation Protocol (SIP).						
c6:	IF A.162/31D OR A.162/31G THEN m ELSE IF A.162/31C THEN i ELSE n/a - - application of the privacy option "header" or application of the privacy option "id" or passing on of the Privacy header transparently.						
c7:	IF A.162/45 THEN m ELSE n/a - - the P-Charging-Vector header extension.						
c8:	IF A.162/46 THEN m ELSE IF A.162/45 THEN i ELSE n/a - - adding, deleting, reading or modifying the P-Charging-Vector header before proxying the request or response or the P-Charging-Vector header extension.						
c9:	IF A.162/44 THEN m ELSE n/a - - the P-Charging-Function-Addresses header extension.						
c10:	IF A.162/44A THEN m ELSE IF A.162/44 THEN i ELSE n/a - - adding, deleting or reading the P-Charging-Function-Addresses header before proxying the request or response, or the P-Charging-Function-Addresses header extension.						
c11:	IF A.162/43 THEN x ELSE IF A.162/41 THEN m ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c12:	IF A.162/43 THEN m ELSE IF A.162/41 THEN i ELSE n/a - - act as subsequent entity within trust network for access network information that can route outside the trust network, the P-Access-Network-Info header extension.						
c13:	IF A.162/11 OR A.162/13 THEN m ELSE i - - reading the contents of the Require header before proxying the request or response or adding or modifying the contents of the Require header before proxying the request or response for methods other than REGISTER.						

Prerequisite A.163/23 - - UPDATE response

Prerequisite: A.164/6 - - 2xx

Table A.308: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
0A	Accept	[26] 20.1	m	m	[26] 20.1	i	i

0B	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
0C	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Authentication-Info	[26] 20.6	m	m	[26] 20.6	i	i
3	Contact	[26] 20.10	m	m	[26] 20.10	i	i
4	Session-Expires	[58] 4	c4	c4	[58] 4	c4	c4
6	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c3:	IF A.162/15 THEN o ELSE i - - the requirement to be able to use separate URIs in the upstream direction and downstream direction when record routing.						
c4:	IF A.162/52 THEN m ELSE n/a - - the SIP session timer						

Prerequisite A.163/23 - - UPDATE response

Prerequisite: A.164/8 OR A.164/9 OR A.164/10 OR A.164/11 OR A.164/12 - - 3xx

Table A.309: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Contact	[26] 20.10	m	m	[26] 20.10	c1	c1
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c1:	IF A.162/19E THEN m ELSE i - - deleting Contact headers.						

Prerequisite A.163/23 - - UPDATE response

Prerequisite: A.164/14 - - 401 (Unauthorized)

Table A.309A: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
3	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
5	Supported	[26] 20.37	m	m	[26] 20.37	i	i
6	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/23 - - UPDATE response

Prerequisite: A.164/17 OR A.164/23 OR A.164/30 OR A.164/36 OR A.164/42 OR A.164/45 OR A.164/50 OR A.164/51 - - 404, 413, 480, 486, 500, 503, 600, 603

Table A.310: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
5	Retry-After	[26] 20.33	m	m	[26] 20.33	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/23 - - UPDATE response

Prerequisite: A.164/18 - - 405 (Method Not Allowed)

Table A.311: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/23 - - UPDATE response

Prerequisite: A.164/20 - - 407 (Proxy Authentication Required)

Table A.312: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
4	Proxy-Authenticate	[26] 20.27	m	m	[26] 20.27	m	m
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i
8	WWW-Authenticate	[26] 20.44	m	m	[26] 20.44	i	i

Prerequisite A.163/23 - - UPDATE response

Prerequisite: A.164/25 - - 415 (Unsupported Media Type)

Table A.313: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Accept	[26] 20.1	m	m	[26] 20.1	i	i
2	Accept-Encoding	[26] 20.2	m	m	[26] 20.2	i	i
3	Accept-Language	[26] 20.3	m	m	[26] 20.3	i	i
4	Allow	[26] 20.5	m	m	[26] 20.5	i	i
6	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
10	Supported	[26] 20.37	m	m	[26] 20.37	i	i

Prerequisite A.163/23 - - UPDATE response

Prerequisite: A.164/27 - - 420 (Bad Extension)

Table A.314: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
6	Supported	[26] 20.37	m	m	[26] 20.37	i	i
7	Unsupported	[26] 20.40	m	m	[26] 20.40	c3	c3
c3:	IF A.162/18 THEN m ELSE i - - reading the contents of the Unsupported header before proxying the 420 response to a method other than REGISTER.						

Prerequisite A.163/23 - - UPDATE response

Prerequisite: A.164/28 OR A.164/41A - - 421 (Extension Required), 494 (Security Agreement Required)

Table A.314A: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	o	o	[26] 20.5	m	m
2	Error-Info	[26] 20.18	o	o	[26] 20.18	o	o
3	Security-Server	[48] 2	c1	c1	[48] 2	n/a	n/a
4	Supported	[26] 20.37	m	m	[26] 20.37	m	m
c1: IF A.162/47 THEN m ELSE n/a - - security mechanism agreement for the session initiation protocol.							

Prerequisite A.163/23 - - UPDATE response

Prerequisite: A.164/28A - - 422 (Session Interval Too Small)

Table A.314B: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Min-SE	[58] 5	c1	c1	[58] 5	c1	c1
c1: IF A.162/52 THEN m ELSE n/a - - the SIP session timer.							

Prerequisite A.163/23 - - UPDATE response

Prerequisite: A.164/35 - - 485 (Ambiguous)

Table A.315: Supported headers within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Allow	[26] 20.5	m	m	[26] 20.5	i	i
2	Contact	[26] 20.10	m	m	[26] 20.10	c1	c1
3	Error-Info	[26] 20.18	m	m	[26] 20.18	i	i
7	Supported	[26] 20.37	m	m	[26] 20.37	i	i
c1: IF A.162/19E THEN m ELSE i - - deleting Contact headers.							

Prerequisite A.163/23 - - UPDATE response

Table A.316: Supported message bodies within the UPDATE response

Item	Header	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1							

A.3 Profile definition for the Session Description Protocol as used in the present document

A.3.1 Introduction

Void.

A.3.2 User agent role

This subclause contains the ICS proforma tables related to the user role. They need to be completed only for UA implementations.

Prerequisite: A.2/1 -- user agent role

A.3.2.1 Major capabilities

Table A.317: Major capabilities

Item	Does the implementation support	Reference	RFC status	Profile status
	Capabilities within main protocol			
	Extensions			
22	Integration of resource management and SIP?	[30]	o	m
23	Grouping of media lines	[53]	o	c1
24	Mapping of Media Streams to Resource Reservation Flows	[54]	o	c1
25	SDP Bandwidth Modifiers for RTCP Bandwidth	[56]	o	o (NOTE 1)
c1: IF A.3/1 THEN m ELSE n/a - - UE role.				
NOTE 1: For "video" and "audio" media types that utilise RTP/RTCP, it shall be specified. For other media types, it may be specified.				

A.3.2.2 SDP types

Table A.318: SDP types

Item	Type	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
Session level description							
1	v= (protocol version)	[39] 6	m	m	[39] 6	m	m
2	o= (owner/creator and session identifier)	[39] 6	m	m	[39] 6	m	m
3	s= (session name)	[39] 6	m	m	[39] 6	m	m
4	i= (session information)	[39] 6	o		[39] 6		
5	u= (URI of description)	[39] 6	o	n/a	[39] 6		n/a
6	e= (email address)	[39] 6	o	n/a	[39] 6		n/a
7	p= (phone number)	[39] 6	o	n/a	[39] 6		n/a
8	c= (connection information)	[39] 6	o		[39] 6		
9	b= (bandwidth information)	[39] 6	o	o (NOTE 1)	[39] 6		
Time description (one or more per description)							
10	t= (time the session is active)	[39] 6	m	m	[39] 6	m	m
11	r= (zero or more repeat times)	[39] 6	o	n/a	[39] 6		n/a
Session level description (continued)							
12	z= (time zone adjustments)	[39] 6	o	n/a	[39] 6		n/a
13	k= (encryption key)	[39] 6	o		[39] 6		
14	a= (zero or more session attribute lines)	[39] 6	o		[39] 6		
Media description (zero or more per description)							
15	m= (media name and transport address)	[39] 6	o	o	[39] 6	m	m
16	i= (media title)	[39] 6	o		[39] 6		
17	c= (connection information)	[39] 6	c1	c1	[39] 6		
18	b= (bandwidth information)	[39] 6	o	o (NOTE 1)	[39] 6		
19	k= (encryption key)	[39] 6	o		[39] 6		
20	a= (zero or more media attribute lines)	[39] 6	o		[39] 6		
c1: IF A.318/15 THEN m ELSE n/a.							
NOTE 1: For "video" and "audio" media types that utilise RTP/RTCP, it shall be specified. For other media types, it may be specified.							

Prerequisite A.318/14 OR A.318/20 - - a= (zero or more session/media attribute lines)

Table A.319: zero or more session / media attribute lines (a=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	category (a=cat)	[39] 6			[39] 6		
2	keywords (a=keywds)	[39] 6			[39] 6		
3	name and version of tool (a=tool)	[39] 6			[39] 6		
4	packet time (a=ptime)	[39] 6			[39] 6		
5	maximum packet time (a=maxptime)	[39] 6			[39] 6		
6	receive-only mode (a=recvonly)	[39] 6			[39] 6		
7	send and receive mode (a=sendrecv)	[39] 6			[39] 6		
8	send-only mode (a=sendonly)	[39] 6			[39] 6		
9	whiteboard orientation (a=orient)	[39] 6			[39] 6		
10	conference type (a=type)	[39] 6			[39] 6		
11	character set (a=charset)	[39] 6			[39] 6		
12	language tag (a=sdplang)	[39] 6			[39] 6		
13	language tag (a=lang)	[39] 6			[39] 6		
14	frame rate (a=framerate)	[39] 6			[39] 6		
15	quality (a=quality)	[39] 6			[39] 6		
16	format specific parameters (a=fmtp)	[39] 6			[39] 6		
17	rtpmap attribute (a=rtpmap)	[39] 6			[39] 6		
18	current-status attribute (a=curr)	[30] 5	c1	c1	[30] 5	c2	c2
19	desired-status attribute (a=des)	[30] 5	c1	c1	[30] 5	c2	c2
20	confirm-status attribute (a=conf)	[30] 5	c1	c1	[30] 5	c2	c2
21	media stream identification attribute (a=mid)	[53] 3	c3	c3	[53] 3	c4	c4
22	group attribute (a=group)	[53] 4	c5	c5	[53] 3	c6	c6
c1:	IF A.317/22 THEN o ELSE n/a.						
c2:	IF A.317/22 THEN m ELSE n/a.						
c3:	IF A.317/23 THEN o ELSE n/a.						
c4:	IF A.317/23 THEN m ELSE n/a.						
c5:	IF A.317/24 THEN o ELSE n/a.						
c6:	IF A.317/24 THEN m ELSE n/a.						

A.3.2.3 SDP types parameters

Prerequisite A.318/2 - - o= (owner/creator and session identifier)

Table A.320: owner/creator and session identifier type (o=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	username	[39] 6	m	m	[39] 6	m	n/a
2	session id	[39] 6	m	m	[39] 6	m	m
3	version	[39] 6	m	m	[39] 6	m	m
4	network type	[39] 6	m	m	[39] 6	m	n/a
5	address type	[39] 6	m	m	[39] 6	m	n/a
6	address	[39] 6	m	m	[39] 6	m	n/a

Prerequisite A.318/10 - - t= (time the session is active)

Table A.321: time the session is active type (t=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	start time	[39] 6	m	m	[39] 6	m	n/a
2	stop time	[39] 6	m	m	[39] 6	m	n/a

Prerequisite A.318/11 - - r= (zero or more repeat times)

Table A.322: zero or more repeat times (r=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	repeat interval	[39] 6		n/a	[39] 6		n/a
2	active duration	[39] 6		n/a	[39] 6		n/a
3	list of offsets from start-time	[39] 6		n/a	[39] 6		n/a

Prerequisite A.318/12 - - z= (time zone adjustments)

Table A.323: time zone adjustments type (z=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	adjustment time	[39] 6		n/a	[39] 6		n/a
2	offset	[39] 6		n/a	[39] 6		n/a
3	adjustment time	[39] 6		n/a	[39] 6		n/a
4	offset	[39] 6		n/a	[39] 6		n/a

Prerequisite A.318/13 - - k= (encryption key)

Table A.324: encryption key type (k=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	method	[39] 6			[39] 6		
2	encryption key	[39] 6			[39] 6		

Prerequisite A.318/15 - - m= (media name and transport address)

Table A.325: media name and transport address type (m=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	media - ``audio" - ``video" - ``application" - ``data" - ``control"	[39] 6			[39] 6		
2	port	[39] 6			[39] 6		
3	transport	[39] 6			[39] 6		
4	fmt list	[39] 6			[39] 6		

Editor's note: It is expected that this table will be expanded, as this is the principle table that will distinguish operation of different entities within the IM CN subsystem.

Prerequisite A.318/17 - - c= (connection information)

Table A.326: connection type (c=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	network type	[39] 6			[39] 6		
2	address type	[39] 6			[39] 6		
3	connection address	[39] 6			[39] 6		

Prerequisite A.318/18 - - b= (bandwidth information)

Table A.327: bandwidth information (b=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	modifier	[39] 6, [56]		o (NOTE 1)	[39] 6, [56]		
2	bandwidth-value	[39] 6		o (NOTE 2)	[39] 6		

NOTE 1: For "video" and "audio" media types that utilise RTP/RTCP, the value shall be AS, RR or RS.
NOTE 2: For "video" and "audio" media types that utilise RTP/RTCP, it shall be specified. For other media types, it may be specified.

A.3.2.4 SDP types parameters within attribute lines

This subclause dos not intend to show an exhaustive list of all the possible attribute values

Prerequisite A.319/22 - - group attribute (a=group)

Table A.327A: group semantics (a=group)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Lip Synchronization (LS)	[53] 4	o	o	[53] 4	m	m
2	Flow Identification (FID)	[53] 4	o	o	[53] 4	m	m
3	Single Reservation Flow (SRF)	[54] 2	o	m	[54] 2	m	m

A.3.3 Proxy role

This subclause contains the ICS proforma tables related to the user role. They need to be completed only for proxy implementations.

Prerequisite: A.2/2 -- proxy role

A.3.3.1 Major capabilities

Table A.328: Major capabilities

Item	Does the implementation support	Reference	RFC status	Profile status
	Capabilities within main protocol			
	Extensions			
1	Integration of resource management and SIP?	[30]	o	n/a
2	Grouping of media lines	[53]	o	c1
3	Mapping of Media Streams to Resource Reservation Flows	[54]	o	c1
4	SDP Bandwidth Modifiers for RTCP Bandwidth	[56]	o	c1
c1: IF A.3/2 THEN m ELSE n/a - - P-CSCF role.				

A.3.3.2 SDP types

Table A.329: SDP types

Item	Type	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
Session level description							
1	v= (protocol version)	[39] 6	m	m	[39] 6	m	m
2	o= (owner/creator and session identifier).	[39] 6	m	m	[39] 6	i	i
3	s= (session name)	[39] 6	m	m	[39] 6	i	i
4	i= (session information)	[39] 6	m	m	[39] 6	i	i
5	u= (URI of description)	[39] 6	m	m	[39] 6	i	i
6	e= (email address)	[39] 6	m	m	[39] 6	i	i
7	p= (phone number)	[39] 6	m	m	[39] 6	i	i
8	c= (connection information)	[39] 6	m	m	[39] 6	i	i
9	b= (bandwidth information)	[39] 6	m	m	[39] 6	i	i
Time description (one or more per description)							
10	t= (time the session is active)	[39] 6	m	m	[39] 6	i	i
11	r= (zero or more repeat times)	[39] 6	m	m	[39] 6	i	i
Session level description (continued)							
12	z= (time zone adjustments)	[39] 6	m	m	[39] 6	i	i
13	k= (encryption key)	[39] 6	m	m	[39] 6	i	i
14	a= (zero or more session attribute lines)	[39] 6	m	m	[39] 6	i	i
Media description (zero or more per description)							
15	m= (media name and transport address)	[39] 6	m	m	[39] 6	m	m
16	i= (media title)	[39] 6	o		[39] 6		
17	c= (connection information)	[39] 6	o		[39] 6		
18	b= (bandwidth information)	[39] 6	o		[39] 6		
19	k= (encryption key)	[39] 6	o		[39] 6		
20	a= (zero or more media attribute lines)	[39] 6	o		[39] 6		

Prerequisite A.329/14 OR A.329/20 -- a= (zero or more session/media attribute lines)

Table A.330: zero or more session / media attribute lines (a=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	category (a=cat)	[39] 6			[39] 6		
2	keywords (a=keywds)	[39] 6			[39] 6		
3	name and version of tool (a=tool)	[39] 6			[39] 6		
4	packet time (a=ptime)	[39] 6			[39] 6		
5	maximum packet time (a=maxptime)	[39] 6			[39] 6		
6	receive-only mode (a=recvonly)	[39] 6			[39] 6		
7	send and receive mode (a=sendrecv)	[39] 6			[39] 6		
8	send-only mode (a=sendonly)	[39] 6			[39] 6		
9	whiteboard orientation (a=orient)	[39] 6			[39] 6		
10	conference type (a=type)	[39] 6			[39] 6		
11	character set (a=charset)	[39] 6			[39] 6		
12	language tag (a=sdplang)	[39] 6			[39] 6		
13	language tag (a=lang)	[39] 6			[39] 6		
14	frame rate (a=framerate)	[39] 6			[39] 6		
15	quality (a=quality)	[39] 6			[39] 6		
16	format specific parameters (a=fmtp)	[39] 6			[39] 6		
17	rtpmap attribute (a=rtpmap)	[39] 6			[39] 6		
18	current-status attribute (a=curr)	[30] 5	m	m	[30] 5	c2	c2
19	desired-status attribute (a=des)	[30] 5	m	m	[30] 5	c2	c2
20	confirm-status attribute (a=conf)	[30] 5	m	m	[30] 5	c2	c2
21	media stream identification attribute (a=mid)	[53] 3	c3	c3	[53] 3	c4	c4
22	group attribute (a=group)	[53] 4	c5	c6	[53] 3	c5	c6
c2:	IF A.328/1 THEN m ELSE i.						
c3:	IF A.328/2 THEN o ELSE n/a.						
c4:	IF A.328/2 THEN m ELSE n/a.						
c5:	IF A.328/3 THEN o ELSE n/a.						
c6:	IF A.328/3 THEN m ELSE n/a.						

A.3.3.3 SDP types parameters

Prerequisite A.329/2 -- o= (owner/creator and session identifier)

Table A.331: owner/creator and session identifier type (o=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	username	[39] 6	m	m	[39] 6	m	m
2	session id	[39] 6	m	m	[39] 6	m	m
3	version	[39] 6	m	m	[39] 6	m	m
4	network type	[39] 6	m	m	[39] 6	m	m
5	address type	[39] 6	m	m	[39] 6	m	m
6	address	[39] 6	m	m	[39] 6	m	m

Prerequisite A.329/10 -- t= (time the session is active)

Table A.332: time the session is active type (b=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	start time	[39] 6			[39] 6		
2	stop time	[39] 6			[39] 6		

Prerequisite A.329/11 - - r= (zero or more repeat times)

Table A.333: zero or more repeat times (r=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	repeat interval	[39] 6			[39] 6		
2	active duration	[39] 6			[39] 6		
3	list of offsets from start-time	[39] 6			[39] 6		

Prerequisite A.329/12 - - z= (time zone adjustments)

Table A.334: time zone adjustments type (z=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	adjustment time	[39] 6			[39] 6		
2	offset	[39] 6			[39] 6		
3	adjustment time	[39] 6			[39] 6		
4	offset	[39] 6			[39] 6		

Prerequisite A.329/13 - - k= (encryption key)

Table A.335: encryption key type (k=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	method	[39] 6			[39] 6		
2	encryption key	[39] 6			[39] 6		

Prerequisite A.329/15 - - m= (media name and transport address)

Table A.336: media name and transport address type (m=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	media - ``audio" - ``video" - ``application" - ``data" - ``control"	[39] 6			[39] 6		
2	port	[39] 6			[39] 6		
3	transport	[39] 6			[39] 6		
4	fmt list	[39] 6			[39] 6		

Editor's note: It is expected that this table will be expanded, as this is the principle table that will distinguish operation of different entities within the IM CN subsystem.

Prerequisite A.329/17 - - c= (connection information)

Table A.337: connection type (c=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	network type	[39] 6			[39] 6		
2	address type	[39] 6			[39] 6		
3	connection address	[39] 6			[39] 6		

Prerequisite A.329/18 - - b= (bandwidth information)

Table A.338: bandwidth information (b=)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	modifier	[39] 6, [56]			[39] 6, [56]		
2	bandwidth-value	[39] 6			[39] 6		

A.3.3.4 SDP types parameters within attribute lines

The subclause does not intend to show an exhaustive list of all the possible attribute values.

Prerequisite A.330/22 -- group attribute (a=group)

Table A.339: group semantics (a=group)

Item	Field	Sending			Receiving		
		Ref.	RFC status	Profile status	Ref.	RFC status	Profile status
1	Lip Synchronization (LS)	[53] 4	m	m	[53] 4	i	i
2	Flow Identification (FID)	[53] 4	m	m	[53] 4	i	i
3	Single Reservation Flow (SRF)	[54] 2	o	m	[54] 2	m	m

A.4 Profile definition for other message bodies as used in the present document

Void.

Annex B (normative): IP-Connectivity Access Network specific concepts when using GPRS to access IM CN subsystem

B.1 Scope

The present annex defines IP-CAN specific requirements for a call control protocol for use in the IP Multimedia (IM) Core Network (CN) subsystem based on the Session Initiation Protocol (SIP), and the associated Session Description Protocol (SDP), where the IP-CAN is General Packet Radio Service (GPRS).

B.2 GPRS aspects when connected to the IM CN subsystem

B.2.1 Introduction

A UE accessing the IM CN subsystem, and the IM CN subsystem itself, utilise the services provided by GPRS to provide packet-mode communication between the UE and the IM CN subsystem.

Requirements for the UE on the use of these packet-mode services are specified in this clause. Requirements for the GGSN in support of this communication are specified in 3GPP TS 29.061 [11] and 3GPP TS 29.207 [12].

When using the GPRS, each IP-CAN bearer is provided by a PDP context.

B.2.2 Procedures at the UE

B.2.2.1 PDP context activation and P-CSCF discovery

Prior to communication with the IM CN subsystem, the UE shall:

- a) perform a GPRS attach procedure;
- b) establish a PDP context used for SIP signalling according to the APN and GGSN selection criteria described in 3GPP TS 23.060 [4] and 3GPP TS 27.060 [10A]. This PDP context shall remain active throughout the period the UE is connected to the IM CN subsystem, i.e. from the initial registration and at least until the deregistration. As a result, the PDP context provides the UE with information that makes the UE able to construct an IPv6 address;

The UE shall choose one of the following options when performing establishment of this PDP context:

I. A dedicated PDP context for SIP signalling:

The UE shall indicate to the GGSN that this is a PDP context intended to carry IM CN subsystem-related signalling only by setting the IM CN Subsystem Signalling Flag. The UE may also use this PDP context for DNS and DHCP signalling according to the static packet filters as described in 3GPP TS 29.061 [11]. The UE can also set the Signalling Indication attribute within the QoS IE;

II. A general-purpose PDP context:

The UE may decide to use a general-purpose PDP Context to carry IM CN subsystem-related signaling. The UE shall indicate to the GGSN that this is a general-purpose PDP context by not setting the IM CN Subsystem Signalling Flag. The UE may carry both signalling and media on the general-purpose PDP context. The UE can also set the Signalling Indication attribute within the QoS IE.

The UE indicates the IM CN Subsystem Signalling Flag to the GGSN within the Protocol Configuration Options IE of the ACTIVATE PDP CONTEXT REQUEST message or ACTIVATE SECONDARY PDP CONTEXT REQUEST message. Upon successful signalling PDP context establishment the UE receives an indication from GGSN in the form of IM CN Subsystem Signalling Flag within the Protocol Configuration Options IE. If the flag is not received, the UE shall consider the PDP context as a general-purpose PDP context.

The encoding of the IM CN Subsystem Signalling Flag within the Protocol Configuration Options IE is described in 3GPP TS 24.008 [8].

The UE can indicate a request for prioritised handling over the radio interface by setting the Signalling Indication attribute (see 3GPP TS 23.107 [4A]). The general QoS negotiation mechanism and the encoding of the Signalling Indication attribute within the QoS IE are described in 3GPP TS 24.008 [8].

NOTE: A general-purpose PDP Context may carry both IM CN subsystem signaling and media, in case the media does not need to be authorized by Service Based Local Policy mechanisms defined in 3GPP TS 29.207 [12] and the media stream is not mandated by the P-CSCF to be carried in a separate PDP Context.

c) acquire a P-CSCF address(es).

The methods for P-CSCF discovery are:

- I. Employ Dynamic Host Configuration Protocol for IPv6 (DHCPv6) RFC 3315 [40], the DHCPv6 options for SIP servers RFC 3319 [41] as described in subclause 9.2.1.
- II. Transfer P-CSCF address(es) within the PDP context activation procedure.

The UE shall indicate the request for a P-CSCF address to the GGSN within the Protocol Configuration Options IE of the ACTIVATE PDP CONTEXT REQUEST message or ACTIVATE SECONDARY PDP CONTEXT REQUEST message.

If the GGSN provides the UE with a list of P-CSCF IPv6 addresses in the ACTIVATE PDP CONTEXT ACCEPT message or ACTIVATE SECONDARY PDP CONTEXT ACCEPT message, the UE shall assume that the list is prioritised with the first address within the Protocol Configuration Options IE as the P-CSCF address with the highest priority.

The UE can freely select method I or II for P-CSCF discovery. In case several P-CSCF addresses are provided to the UE, the selection of P-CSCF address shall be performed according to the resolution of host name as indicated in RFC 3261 [26]. If sufficient information for P-CSCF address selection is not available, selection of the P-CSCF address by the UE is implementation specific.

If the UE is designed to use I above, but receives P-CSCF address(es) according to II, then the UE shall either ignore the received address(es), or use the address(es) in accordance with II, and not proceed with the DHCP request according to I.

The UE may request a DNS Server IPv6 address(es) via RFC 3315 [40] or by the Protocol Configuration Options IE when activating a PDP context according to 3GPP TS 27.060 [10A].

The encoding of the request and response for IPv6 address(es) for DNS server(s) and list of P-CSCF address(es) within the Protocol Configuration Options IE is described in 3GPP TS 24.008 [8].

B.2.2.1A Modification of a PDP context used for SIP signalling

The PDP context shall not be modified from a dedicated PDP context for SIP signalling to a general-purpose PDP context or vice versa. The IM CN Subsystem Signalling Flag shall not be set in the Protocol Configuration Options IE of the MODIFY PDP CONTEXT REQUEST message.

The UE shall not indicate the request for a P-CSCF address to the GGSN within the Protocol Configuration Options IE of the MODIFY PDP CONTEXT REQUEST message. The UE shall ignore P-CSCF address(es) if received from the GGSN in the Protocol Configuration Options IE of the MODIFY PDP CONTEXT RESPONSE message.

B.2.2.1B Re-establishment of the PDP context for signalling

If the dedicated PDP context for SIP signalling is lost due to e.g. a GPRS routing area update procedure, the UE shall attempt to re-establish the dedicated PDP context for SIP signalling. If this procedure does not succeed, the UE shall deactivate all PDP contexts established as a result of SIP signalling according to the 3GPP TS 24.008 [8].

B.2.2.2 Session management procedures

The existing procedures for session management as described in 3GPP TS 24.008 [8] shall apply while the UE is connected to the IM CN subsystem.

B.2.2.3 Mobility management procedures

The existing procedures for mobility management as described in 3GPP TS 24.008 [8] shall apply while the UE is connected to the IM CN subsystem.

B.2.2.4 Cell selection and lack of coverage

The existing mechanisms and criteria for cell selection as described in 3GPP TS 25.304 [9] and 3GPP TS 44.018 [20] shall apply while the UE is connected to the IM CN subsystem.

B.2.2.5 PDP contexts for media

B.2.2.5.1 General requirements

The UE can establish media streams that belong to different SIP sessions on the same PDP context.

During establishment of a session, the UE establishes data stream(s) for media related to the session. Such data stream(s) may result in activation of additional PDP context(s). Such additional PDP context(s) shall be established as secondary PDP contexts associated to the PDP context used for signalling.

When the UE has to allocate bandwidth for RTP and RTCP in a PDP context, the UE shall use the rules outlined in 3GPP TS 29.208 [13].

B.2.2.5.1A Activation or modification of PDP contexts for media

If the UE receives indication within the SDP according to RFC 3524 [54] that media stream(s) belong to group(s), the media stream(s) shall be set up on separate PDP contexts according to the indication of grouping. The UE may freely group media streams to PDP context(s) in case no indication of grouping is received from the P-CSCF.

The UE can receive a media authorization token in the P-Media-Authorization header from the P-CSCF according to RFC 3313 [31]. If a media authorization token is received in the P-Media-Authorization header when a SIP session is initiated, the UE shall:

- either use existing PDP context(s) where another media authorization token is already in use and no indication of media grouping is required; or
- establish separate PDP context(s) for the media; or
- use an existing PDP context where media authorization token is not in use and no indication of media grouping is required.

When a UE modifies a PDP context to indicate a new media authorization token:

- either as a result of establishment of an additional SIP session; or
- modification of media streams for an ongoing SIP session;

the UE shall include all media authorization tokens and all flow identifiers for all ongoing SIP sessions that use this particular PDP context.

If a media authorization token is received in subsequent messages for the same SIP session, the UE shall:

- use the existing PDP context(s) for media;
- modify the existing PDP context(s) for media; or
- establish additional PDP context(s) for media.

If either background or interactive QoS class is needed for the media, then the UE does not need to use the authorization token even if it receives one. In this case the UE may reuse an existing PDP context and it does not need to request PDP context modification unless it needs to modify the QoS.

If existing PDP context(s) where another media authorization token is already in use is re-used for the media, or separate PDP context(s) is established for the media, the UE shall proceed as follows:

- when a SIP session is terminated, the media authorization token is no longer valid and the UE shall not include it in future GPRS session management messages. The UE shall send a MODIFY PDP CONTEXT REQUEST message updating the binding information by deleting the media authorization token and the corresponding flow identifiers that are no longer valid. If a SIP session is terminated and no other SIP sessions are using the PDP context, the UE shall either update the binding information as described above or deactivate the PDP context;
- the UE shall transparently pass the media authorization token received from the P-CSCF in a response to an INVITE request at originating setup or in the INVITE request at terminating setup to the GGSN. The UE shall signal it by inserting it within the Traffic Flow Template IE in the ACTIVATE SECONDARY PDP CONTEXT REQUEST message or the MODIFY PDP CONTEXT REQUEST message;
- to identify to the GGSN which flow(s) (identified by m-lines within the SDP) that are transferred within a particular PDP context, the UE shall set the flow identifier(s) within the Traffic Flow Template IE in the ACTIVATE SECONDARY PDP CONTEXT REQUEST message or the MODIFY PDP CONTEXT REQUEST message. Detailed description of how the flow identifiers are constructed is provided in 3GPP TS 29.207 [12];
- if the UE receives several media authorization tokens from the P-CSCF within the same SIP request or response, the first instance of the media authorization token shall be sent to the GGSN, and subsequent instances are discarded by the UE; and
- the UE shall not include the IM CN Subsystem Signalling Flag when a PDP context for media is established or modified.

The encoding of the media authorization token and the flow identifiers within the Traffic Flow Template IE is described in 3GPP TS 24.008 [8].

B.2.2.5.2 Special requirements applying to forked responses

Since the UE does not know that forking has occurred until a second, provisional response arrives, the UE sets up the PDP context(s) as required by the initial response received. If a subsequent provisional response is received, different alternative actions may be performed depending on the requirements in the SDP answer:

- 1) **the bearer requirements of the subsequent SDP can be accommodated by the existing PDP context(s).** The UE performs no activation or modification of PDP contexts.
- 2) **the subsequent SDP introduces different QoS requirements or additional IP flows.** The UE modifies the existing PDP context(s), if necessary, according to subclause B.2.2.5.1A.
- 3) **the subsequent SDP introduces one or more additional IP flows.** The UE establishes additional PDP context(s) according to subclause B.2.2.5.1A.

NOTE 1: When several forked responses are received, the resources requested by the UE is are the “logical OR” of the resources indicated in the multiple responses to avoid allocation of unnecessary resources. The UE does not request more resources than proposed in the original INVITE request.

NOTE 2: When service-based local policy is applied, the UE receives the same authorization token for all forked requests/responses related to the same SIP session.

When a final answer is received for one of the early dialogues, the UE proceeds to set up the SIP session. The UE shall release all the unneeded radio/bearer resources. Therefore, upon the reception of a first final 200 (OK) response for the INVITE request (in addition to the procedures defined in RFC 3261 [26] subclause 13.2.2.4), the UE shall:

- 1) in case PDP context(s) were established or modified as a consequence of the INVITE request and forked provisional responses that are not related to the accepted 200 (OK) response, delete the PDP context(s) or modify the delete the PDP context(s) back to their original state.

B.2.2.5.3 Unsuccessful situations

One of the Go interface related error codes can be received by the UE in the ACTIVATE SECONDARY PDP CONTEXT REJECT message or the MODIFY PDP CONTEXT REJECT message. If the UE receives a Go interface related error code, the UE shall either terminate the session or retransmit the message up to three times. The Go interface related error codes are further specified in 3GPP TS 29.207 [12].

B.3 Application usage of SIP

B.3.1 Procedures at the UE

B.3.1.1 Additional coding rules for P-Access-Network-Info header

The UE shall populate the P-Access-Network-Info header, where use is specified in subclause 5.1, with the following contents:

- 1) the access-type field set to one of "3GPP-GERAN", "3GPP-UTRAN-FDD", "3GPP-UTRAN-TDD" or "3GPP-CDMA2000" as appropriate to the radio access technology in use;
- 2) if the access type field is set to "3GPP-GERAN", a cgi-3gpp parameter set to the Cell Global Identity obtained from lower layers of the UE. The Cell Global Identity is a concatenation of MCC, MNC, LAC and CI (as described in 3GPP TS 23.003 [3]). The value of "cgi-3gpp" parameter is therefore coded as a text string as follows:

Starting with the most significant bit, MCC (3 digits), MNC (2 or 3 digits depending on MCC value), LAC (fixed length code of 16 bits using full hexadecimal representation) and CI (fixed length code of 16 bits using a full hexadecimal representation);

- 3) if the access type field is equal to "3GPP-UTRAN-FDD", "3GPP-UTRAN-TDD" or "3GPP-CDMA2000", a "utran-cell-id-3gpp" parameter set to a concatenation of the MCC, MNC, LAC (as described in 3GPP TS 23.003 [3]) and the UMTS Cell Identity (as described in 3GPP TS 25.331 [9A]), obtained from lower layers of the UE, and is coded as a text string as follows:

Starting with the most significant bit, MCC (3 digits), MNC (2 or 3 digits depending on MCC value), LAC (fixed length code of 16 bits using full hexadecimal representation) and UMTS Cell Identity (fixed length code of 28 bits).

B.4 3GPP specific encoding for SIP header extensions

B.4.1 P-Charging-Vector header

The access network charging information is populated in the P-Charging-Vector using the gprs-charging-info parameter. Table B.1 describes 3GPP-specific extensions to the P-Charging-Vector header field defined in RFC 3455 [52].

Table B.1: Syntax of extensions to P-Charging-Vector header

```

access-network-charging-info = (gprs-charging-info / generic-param)
gprs-charging-info = ggsn SEMI auth-token [SEMI pdp-info-hierarchy] *(SEMI extension-param)
ggsn = "ggsn" EQUAL gen-value
pdp-info-hierarchy = "pdp-info" EQUAL LDQUOT pdp-info *(COMMA pdp-info) RDQUOT
pdp-info = pdp-item SEMI pdp-sig SEMI gcid [SEMI flow-id]
pdp-item = "pdp-item" EQUAL DIGIT
pdp-sig = "pdp-sig" EQUAL ("yes" / "no")
gcid = "gcid" 1*HEXDIG
auth-token = "auth-token" EQUAL 1*HEXDIG
flow-id = "flow-id" EQUAL "(" "{" 1*DIGIT COMMA 1*DIGIT "}" *(COMMA "{" 1*DIGIT COMMA 1*DIGIT
    "}")")"
extension-param = token [EQUAL token]

```

The access-network-charging-info parameter is an instance of generic-param from the current charge-params component of P-Charging-Vector header.

The access-network-charging-info parameter includes alternative definitions for different types access networks.

GPRS is the initially supported access network (gprs-charging-info parameter). For GPRS there are the following components to track: GGSN address (ggsn parameter), media authorization token (auth token parameter), and a pdp-info parameter that contains the information for one or more PDP contexts. The pdp-info contains one or more pdp-item values followed by a collection of parameters (pdp-sig, gcid, and flow-id). The value of the pdp-item is a unique number that identifies each of the PDP-related charging information within the P-Charging-Vector header. Each PDP context has an indicator if it is an IM CN subsystem signalling PDP context (pdp-sig parameter), an associated GPRS Charging Identifier (gcid parameter), and a identifier (flow-id parameter). The flow-id parameter contains a sequence of curly bracket delimited flow identifier tuples that identify associated m-lines and relative order of port numbers in an m-line within the SDP from the SIP signalling to which the PDP context charging information applies. For a complete description of the semantics of the flow-id parameter see 3GPP TS 29.207 [12] Annex C. The gcid, ggsn address and flow-id parameters are transferred from the GGSN to the P-CSCF via the PDF over the Go interface (see 3GPP TS 29.207 [12]) and Gq interface (see 3GPP TS 29.209 [13A]).

The gcid value is received in binary format at the P-CSCF (see 3GPP TS 29.207 [12]). The P-CSCF shall encode it in hexadecimal format before include it into the gcid parameter. On receipt of this header, a node receiving a gcid shall decode from hexadecimal into binary format.

The access network charging information is not included in the P-Charging-Vector for non-session based SIP signalling, and may not be available for sessions that use a general purpose PDP context (for both SIP signalling and media) or that do not require media authorisation.

When the access network charging information is included in the P-Charging-Vector and necessary information is not available from the Go/Gq interface reference points then null or zero values are included.

Annex C (normative): UICC and USIM Aspects for access to the IM CN subsystem

C.1 Scope

This clause describes the UICC and USIM aspects for access to the IM CN subsystem. Additional requirements related to UICC usage for access to the IM CN subsystem are described in 3GPP TS 33.203 [19].

C.2 Derivation of IMS parameters from USIM

In case the UE is loaded with a UICC that contains a USIM application but does not contain an ISIM application, the UE shall:

- generate a private user identity;
- generate a temporary public user identity; and
- generate a home network domain name to address the SIP REGISTER request to.

All these three parameters are derived from the IMSI parameter in the USIM, according to the procedures described in 3GPP TS 23.003 [3]. Also in this case, the UE shall derive new values every time the UICC is changed, and shall discard existing values if the UICC is removed.

NOTE: If there is an ISIM and a USIM application on a UICC, the ISIM application is used for IMS authentication, as described in 3GPP TS 33.203 [19]. See subclause 5.1.1.1A.

C.3 ISIM Location in 3GPP Systems

For 3GPP systems, if ISIM application is present, it is contained in UICC.

Annex D (informative): Change history

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
					Version 0.0.0 Editor's internal draft			
					Version 0.0.1 Editor's internal draft			
					Version 0.0.2 Editor's internal draft			
		N1-001060			Version 0.0.3 Submitted to CN1 SIP adhoc #1			
19/10/00		N1-001109			Version 0.0.4 Reflecting results of initial CN1 discussion			
19/10/00		N1-001115			Version 0.0.5 Reflecting output of CN1 SIP adhoc#1 discussion			
09/11/00					Version 0.0.6 Revision to include latest template and styles			
		N1-010092			Version 0.0.7 Reflecting updates of some IETF drafts			
14/02/01		N1-010269			Version 0.0.8 Revision to include temporary annex B incorporating valuable source material			
18/03/01		N1-010378 rev			Version 0.1.0 incorporating results of CN1 discussion at CN1 #16			
12/04/01		N1-010737			Version 0.2.0 incorporating results of CN1 discussions at SIP adhoc #4			
11/06/01		N1-010935			Version 0.3.0 incorporating results of CN1 discussions at CN1 #16			
23/07/01		N1-011103			Version 0.4.0 incorporating results of CN1 discussions at CN1 #18 (agreed documents N1-011028, N1-011050, N1-011055, N1-011056)			
12/09/01		N1-011385			Version 0.5.0 incorporating results of CN1 discussions at CN1 #19 (agreed documents N1-011109, N1-011152, N1-011195, N1-011312, N1-011319, N1-011343)			
04/10/01		N1-011470			Version 0.6.0 incorporating results of CN1 discussions at CN1 #19bis (agreed documents N1-011346, N1-011373, N1-011389, N1-011390, N1-011392, N1-011393, N1-011394, N1-011408, N1-011410, N1-011426)			
19/10/01		N1-011643			Version 0.7.0 incorporating results of CN1 discussions at CN1 #20 (agreed documents N1-011477, N1-011479, N1-011498, N1-011523, N1-011548, N1-011585, N1-011586, N1-011592, N1-011611, N1-011629)			
16/11/01		N1-011821			Version 0.8.0 incorporating results of CN1 discussions at CN1 #20bis (agreed documents N1-011685, N1-011690, N1-011741, N1-011743, N1-011759, N1-011760, N1-011761, N1-011765c, N1-011767, N1-011769, N1-011770, N1-011771, N1-011774, N1-011777, N1-011779, N1-011780) N1-011712 was agreed but determined to have no impact on the specification at this time.			
30/11/01		N1-020010			Version 1.0.0 incorporating results of CN1 discussions at CN1 #21 (agreed documents N1-011828, N1-011829, N1-011836, N1-011899 [revision marks not used on moved text - additional change from chairman's report incorporated], implementation of subclause 3.1 editor's note based on discussion of N1-011900 [chairman's report], N1-011905, N1-011984, N1-011985, N1-011986, N1-011988, N1-011989, N1-012012 [excluding points 2 and 16], N1-012013, N1-012014 [excluding point 1], N1-012015, N1-012021, N1-012022, N1-012025, N1-012031, N1-012045, N1-012056, N1-012057) CN1 agreed for presentation for information to CN plenary.			
18/01/02		N1-020189			Version 1.1.0 incorporating results of CN1 discussions at CN1 SIP ad-hoc (agreed documents N1-020015, N1-020053, N1-020064, N1-020101, N1-020123, N1-020124, N1-020142, N1-020146, N1-020147, N1-020148, N1-020151, N1-020157, N1-020159, N1-020165). Also N1-012000 (agreed at previous meeting) required, subclause 5.2.6 to be deleted and this			

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
					change has been enacted			
01/02/02		N1-020459			Version 1.2.0 incorporating results of CN1 discussions at CN1 #22 (agreed documents N1-020198, N1-020396, N1-020398, N1-020399, N1-020408, N1-020417, N1-020418, N1-020419, N1-020421, N1-020422, N1-020436, N1-020437, N1-020449)			
01/02/02		N1-020569			Version 1.2.1 issues to correct cut and paste error in incorporation of Annex B into main document. Affected subclause 5.1.1.3. Change to clause 7 title that was incorrectly applied to subclause 7.2 also corrected.			
22/02/02					Advanced to version 2.0.0 based on agreement of N1-020515. Version 2.0.0 incorporating results of CN1 discussions at CN1 #22bis (agreed documents N1-020466, N1-020468, N1-020469, N1-020472, N1-020473, N1-020500, N1-020504, N1-020507, N1-020511, N1-020512, N1-020521, N1-020583, N1-020584, N1-020602, N1-020603, N1-020604, N1-020611, N1-020612, N1-020613, N1-020614, N1-020615, N1-020617, N1-020623, N1-020624, N1-020625, N1-020626, N1-020627, N1-020642, N1-020643, N1-020646, N1-020649, N1-020656, N1-020659, N1-020668, N1-020669, N1-020670, N1-020671). In addition N1-020409, agreed at CN1#22 but missed from the previous version, was also implemented. References have been resequenced.			
02/03/02					Editorial clean-up by ETSI/MCC.	2.0.0	2.0.1	
11/03/02	TSG CN#15	NP-020049			The draft was approved, and 3GPP TS 24.229 was then to be issued in Rel-5 under formal change control.	2.0.1	5.0.0	
2002-06	NP-16	NP-020230	004	1	S-CSCF Actions on Authentication Failure	5.0.0	5.1.0	N1-020903
2002-06	NP-16	NP-020230	005	2	Disallow Parallel Registrations	5.0.0	5.1.0	N1-020959
2002-06	NP-16	NP-020230	007	1	Hiding	5.0.0	5.1.0	N1-020910
2002-06	NP-16	NP-020312	008	8	Support for services for unregistered users	5.0.0	5.1.0	
2002-06			009	1	Not implemented nor implementable. In the meeting report CN1#24 under doc N1-021513 it is shown that CR095r2 supercedes 009r1 if 095r2 was to be approved in CN#16 (but unfortunately 009r1 was also approved in the the CN#16 draft minutes).			N1-020921
2002-06	NP-16	NP-020231	019		MGCF procedure clarification	5.0.0	5.1.0	N1-020788
2002-06	NP-16	NP-020231	020	2	MGCF procedure error cases	5.0.0	5.1.0	N1-020960
2002-06	NP-16	NP-020231	022	1	Abbreviations clean up	5.0.0	5.1.0	N1-020949
2002-06	NP-16	NP-020231	023		Clarification of SIP usage outside IM CN subsystem	5.0.0	5.1.0	N1-020792
2002-06	NP-16	NP-020314	024	3	Replacement of COMET by UPDATE	5.0.0	5.1.0	
2002-06	NP-16	NP-020231	025	3	Incorporation of current RFC numbers	5.0.0	5.1.0	N1-021091
2002-06	NP-16	NP-020231	026	1	Clarification of B2BUA usage in roles	5.0.0	5.1.0	N1-020941
2002-06	NP-16	NP-020231	028	4	Determination of MO / MT requests in I-CSCF (THIG)	5.0.0	5.1.0	N1-021248
2002-06	NP-16	NP-020231	030	2	P-CSCF release of an existing session	5.0.0	5.1.0	N1-021006
2002-06	NP-16	NP-020232	031	1	S-CSCF release of an existing session	5.0.0	5.1.0	N1-020939
2002-06	NP-16	NP-020232	033	3	SDP procedure at the UE	5.0.0	5.1.0	N1-020971
2002-06	NP-16	NP-020232	035	1	AS Procedures corrections	5.0.0	5.1.0	N1-020934
2002-06	NP-16	NP-020232	036	8	Corrections to SIP Compression	5.0.0	5.1.0	N1-021499

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
2002-06	NP-16	NP-020232	037	1	Enhancement of S-CSCF and I-CSCF Routing Procedures for interworking with external networks	5.0.0	5.1.0	N1-020928
2002-06	NP-16	NP-020232	041	2	Delivery of IMS security parameters from S-CSCF to the P-CSCF by using proprietary auth-param	5.0.0	5.1.0	N1-021003
2002-06	NP-16	NP-020232	045		Cleanup of request / response terminology - clause 5	5.0.0	5.1.0	N1-020835
2002-06	NP-16	NP-020232	046		Cleanup of request / response terminology - clause 6	5.0.0	5.1.0	N1-020836
2002-06	NP-16	NP-020232	047	2	Simplification of profile tables	5.0.0	5.1.0	N1-021059
2002-06	NP-16	NP-020232	049		Forking options	5.0.0	5.1.0	N1-020839
2002-06	NP-16	NP-020315	050	1	Media-Authorization header corrections	5.0.0	5.1.0	
2002-06	NP-16	NP-020233	051	1	Clause 5.4 editorials (S-CSCF)	5.0.0	5.1.0	N1-020950
2002-06	NP-16	NP-020233	053	2	Integrity protection signalling from the P-CSCF to the S-CSCF	5.0.0	5.1.0	N1-021007
2002-06	NP-16	NP-020233	054		Representing IM CN subsystem functional entities in profile table roles	5.0.0	5.1.0	N1-020847
2002-06	NP-16	NP-020233	055		Clause 4 editorials	5.0.0	5.1.0	N1-020848
2002-06	NP-16	NP-020233	056		Clause 5.8 editorials (MRFC)	5.0.0	5.1.0	N1-020849
2002-06	NP-16	NP-020233	057	1	Annex A editorials, including precondition additions	5.0.0	5.1.0	N1-021001
2002-06	NP-16	NP-020233	058	2	Representing the registrar as a UA	5.0.0	5.1.0	N1-021054
2002-06	NP-16	NP-020233	059		Additional definitions	5.0.0	5.1.0	N1-020852
2002-06	NP-16	NP-020312	060	11	Restructuring of S-CSCF Registration Sections	5.0.0	5.1.0	
2002-06	NP-16	NP-020234	061	2	Determination of MOC / MTC at P-CSCF and S-CSCF	5.0.0	5.1.0	N1-021060
2002-06	NP-16	NP-020234	062		Correction to the terminating procedures	5.0.0	5.1.0	N1-020927
2002-06	NP-16	NP-020234	063		Loose Routing for Network Initiated Call Release Procedures	5.0.0	5.1.0	N1-020940
2002-06	NP-16	NP-020234	064		Incorporation of previously agreed corrections to clause 5.2.5.2 (N1-020416)	5.0.0	5.1.0	N1-021004
2002-06	NP-16	NP-020234	065		Clause 7.2 editorial corrections	5.0.0	5.1.0	N1-021005
2002-06	NP-16	NP-020234	067	2	S-CSCF routing of MO calls	5.0.0	5.1.0	N1-021097
2002-06	NP-16	NP-020234	068	1	I-CSCF routing of dialog requests	5.0.0	5.1.0	N1-021078
2002-06	NP-16	NP-020234	069	2	Definition of the Tokenised-by parameter	5.0.0	5.1.0	N1-021096
2002-06	NP-16	NP-020235	070	3	SDP procedures at UE	5.0.0	5.1.0	N1-021453
2002-06	NP-16	NP-020235	073	2	Updates to the procedures involving the iFCs, following the Oulu iFC changes	5.0.0	5.1.0	N1-021440
2002-06	NP-16	NP-020235	074	1	Addition of DHCPv6 references to 24.229	5.0.0	5.1.0	N1-021086
2002-06	NP-16	NP-020235	075	1	Clarification to URL and address assignments	5.0.0	5.1.0	N1-021083
2002-06	NP-16	NP-020235	079	3	Downloading the implicitly registered public user identities from the S-CSCF to P-CSCF	5.0.0	5.1.0	N1-021510
2002-06	NP-16	NP-020235	080	3	Clarification of GPRS aspects	5.0.0	5.1.0	N1-021486
2002-06	NP-16	NP-020235	081	2	Introduction of Subscription Locator Function Interrogation at I-CSCF in 24.229	5.0.0	5.1.0	N1-021469
2002-06	NP-16	NP-020235	082	1	Introduction of Visited_Network_ID p-header	5.0.0	5.1.0	N1-021433
2002-06	NP-16	NP-020236	084	1	MRFC register addresses	5.0.0	5.1.0	N1-021434
2002-06	NP-16	NP-020236	085	1	MRFC INVITE interface editor's notes	5.0.0	5.1.0	N1-021470
2002-06	NP-16	NP-020236	086	1	MRFC OPTIONS interface editor's notes	5.0.0	5.1.0	N1-021471
2002-06	NP-16	NP-020236	087		MRFC PRACK & INFO editor's notes	5.0.0	5.1.0	N1-021159

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
2002-06	NP-16	NP-020236	088	1	MGCF OPTIONS interface editor's notes	5.0.0	5.1.0	N1-021472
2002-06	NP-16	NP-020236	089		MGCF reINVITE editor's notes	5.0.0	5.1.0	N1-021161
2002-06	NP-16	NP-020237	090		3PCC AS editor's notes	5.0.0	5.1.0	N1-021162
2002-06	NP-16	NP-020237	091		AS acting as terminating UA editor's notes	5.0.0	5.1.0	N1-021163
2002-06	NP-16	NP-020237	092	1	AS acting as originating UA editor's notes	5.0.0	5.1.0	N1-021466
2002-06	NP-16	NP-020237	093	2	Charging overview clause	5.0.0	5.1.0	N1-021512
2002-06	NP-16	NP-020237	094	1	Procedures for original-dialog-id P-header	5.0.0	5.1.0	N1-021456
2002-06	NP-16	NP-020237	095	2	Procedures for charging-vector P-header	5.0.0	5.1.0	N1-021513
2002-06	NP-16	NP-020237	096	1	Procedures for charging-function-addresses P-header	5.0.0	5.1.0	N1-021458
2002-06	NP-16	NP-020237	097	1	SDP types	5.0.0	5.1.0	N1-021467
2002-06	NP-16	NP-020237	100		Removal of State from profile tables	5.0.0	5.1.0	N1-021173
2002-06	NP-16	NP-020238	101		Editor's note cleanup - clause 3	5.0.0	5.1.0	N1-021174
2002-06	NP-16	NP-020238	102		Editor's note cleanup - clause 4	5.0.0	5.1.0	N1-021175
2002-06	NP-16	NP-020238	103		Editor's note cleanup - clause 5.1 and deletion of void subclauses	5.0.0	5.1.0	N1-021176
2002-06	NP-16	NP-020238	104	1	Editor's note cleanup - clause 5.2 and deletion of void subclauses	5.0.0	5.1.0	N1-021487
2002-06	NP-16	NP-020238	105		Editor's note cleanup - clause 5.3	5.0.0	5.1.0	N1-021178
2002-06	NP-16	NP-020238	106		Editor's note cleanup - clause 5.4 and deletion of void subclauses	5.0.0	5.1.0	N1-021179
2002-06	NP-16	NP-020238	107		Editor's note cleanup - clause 5.5 and deletion of void subclauses	5.0.0	5.1.0	N1-021180
2002-06	NP-16	NP-020238	110		Editor's note cleanup - clause 6	5.0.0	5.1.0	N1-021183
2002-06	NP-16	NP-020238	111		Editor's note cleanup - clause 9	5.0.0	5.1.0	N1-021184
2002-06	NP-16	NP-020239	113	1	SIP Default Timers	5.0.0	5.1.0	N1-021465
2002-06	NP-16	NP-020239	114	1	Correction of the subscription to the registration event package	5.0.0	5.1.0	N1-021436
2002-06	NP-16	NP-020239	115	1	Support for ISIMless UICC	5.0.0	5.1.0	N1-021441
2002-06	NP-16	NP-020239	119	1	SIP procedures at UE	5.0.0	5.1.0	N1-021452
2002-06	NP-16	NP-020239	121	2	New requirements in the P-CSCF	5.0.0	5.1.0	N1-021509
2002-06	NP-16	NP-020239	122		SDP procedures at MGCF	5.0.0	5.1.0	N1-021264
2002-06	NP-16	NP-020239	124	1	S-CSCF allocation	5.0.0	5.1.0	N1-021443
2002-06	NP-16	NP-020240	129	1	Introduction of P-Access-Network-Info header	5.0.0	5.1.0	N1-021498
2002-06	NP-16	NP-020240	130	2	Usage of Path and P-Service Route	5.0.0	5.1.0	N1-021508
2002-06	NP-16	NP-020240	133		Removal of Referred-By header from specification	5.0.0	5.1.0	N1-021354
2002-06	NP-16	NP-020240	134		Handling of Record-Route header in profile tables	5.0.0	5.1.0	N1-021357
2002-06	NP-16	NP-020312	135	1	Asserted identities and privacy	5.0.0	5.1.0	
2002-06	NP-16	NP-020240	136		Removal of caller preferences from specification	5.0.0	5.1.0	N1-021359
2002-06	NP-16	NP-020240	137		Substitution of REFER references	5.0.0	5.1.0	N1-021360
2002-06	NP-16	NP-020240	138		Removal of session timer from specification	5.0.0	5.1.0	N1-021361
2002-09	NP-17	NP-020489	141	2	Adding MESSAGE to 24.229	5.1.0	5.2.0	

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
2002-09	NP-17	NP-020375	142		Public user identity to use for third party register	5.1.0	5.2.0	N1-021563
2002-09	NP-17	NP-020375	143	1	Replace P-Original-Dialog-ID header with unique data in Route header	5.1.0	5.2.0	N1-021797
2002-09	NP-17	NP-020375	145		Synchronize text with latest I-D for P-headers for charging	5.1.0	5.2.0	N1-021569
2002-09	NP-17	NP-020488	146	2	Service profiles and implicitly registered public user identities	5.1.0	5.2.0	
2002-09	NP-17	NP-020376	147		S-CSCF decides when to include IOI	5.1.0	5.2.0	N1-021571
2002-09	NP-17	NP-020376	148		Clean up XML in clause 7.6	5.1.0	5.2.0	N1-021572
2002-09	NP-17	NP-020376	149		Fix clause 5.2.7.4 header	5.1.0	5.2.0	N1-021573
2002-09	NP-17	NP-020376	150		Removal of forward reference to non P-CSCF procedures	5.1.0	5.2.0	N1-021589
2002-09	NP-17	NP-020376	151		Deregistration of public user identities	5.1.0	5.2.0	N1-021590
2002-09	NP-17	NP-020376	152		Reauthentication trigger via other means	5.1.0	5.2.0	N1-021591
2002-09	NP-17	NP-020487	153	3	Registration with integrity protection	5.1.0	5.2.0	
2002-09	NP-17	NP-020485	154	2	Explicit listing of need to route response messages	5.1.0	5.2.0	
2002-09	NP-17	NP-020377	157	1	Include IP address in ICID	5.1.0	5.2.0	N1-021816
2002-09	NP-17	NP-020377	158		Reference updates	5.1.0	5.2.0	N1-021604
2002-09	NP-17	NP-020377	159		Abbreviation updates	5.1.0	5.2.0	N1-021605
2002-09	NP-17	NP-020377	163	1	Clarifications of allocation of IP address	5.1.0	5.2.0	N1-021817
2002-09	NP-17	NP-020377	171	1	Verifications at the P-CSCF for subsequent request	5.1.0	5.2.0	N1-021802
2002-09	NP-17	NP-020377	174	1	Clarification of IMS signalling flag	5.1.0	5.2.0	N1-021781
2002-09	NP-17	NP-020377	176	1	Definition of a general-purpose PDP context for IMS	5.1.0	5.2.0	N1-021783
2002-09	NP-17	NP-020372	177	2	Request for DNS IPv6 server address	5.1.0	5.2.0	N1-021833
2002-09	NP-17	NP-020378	178		Error cases for PDP context modification	5.1.0	5.2.0	N1-021679
2002-09	NP-17	NP-020378	183	1	Incorporation of draft-ietf-sip-sec-agree-04.txt	5.1.0	5.2.0	N1-021791
2002-09	NP-17	NP-020378	185	1	User Initiated De-registration	5.1.0	5.2.0	N1-021787
2002-09	NP-17	NP-020378	186	1	Mobile initiated de-registration	5.1.0	5.2.0	N1-021788
2002-09	NP-17	NP-020378	187	1	CallID of REGISTER requests	5.1.0	5.2.0	N1-021786
2002-09	NP-17	NP-020378	188	1	Correction to the I-CSCF routing procedures	5.1.0	5.2.0	N1-021803
2002-09	NP-17	NP-020378	189	1	Registration procedures at P-CSCF	5.1.0	5.2.0	N1-021793
2002-09	NP-17	NP-020378	192	1	Corrections related to the P-Access-Network-Info header	5.1.0	5.2.0	N1-021827
2002-09	NP-17	NP-020378	194	1	Chapter to describe the registration event	5.1.0	5.2.0	N1-021794
2002-09	NP-17	NP-020484	196		Definition of abbreviation IMS	5.1.0	5.2.0	
2002-12	NP-18	NP-020558	140	4	Support of non-IMS forking	5.2.0	5.3.0	N1-022446
2002-12	NP-18	NP-020565	144	2	Identification of supported IETF drafts within this release	5.2.0	5.3.0	N1-022114
2002-12	NP-18	NP-020558	161	3	Clarifications and editorials to SIP profile	5.2.0	5.3.0	N1-022412
2002-12	NP-18	NP-020558	175	5	Clarifications of the binding and media grouping	5.2.0	5.3.0	N1-022494
2002-12	NP-18	NP-020558	179	2	Support of originating requests from Application Servers	5.2.0	5.3.0	N1-022106

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
2002-12	NP-18	NP-020558	197		Wrong references in 4.1	5.2.0	5.3.0	N1-021902
2002-12	NP-18	NP-020558	198		Alignment of the MGCF procedures to RFC 3312	5.2.0	5.3.0	N1-021903
2002-12	NP-18	NP-020558	199	1	Service Route Header and Path Header interactions	5.2.0	5.3.0	N1-022080
2002-12	NP-18	NP-020558	202		Addition of clause 6 though clause 9 references to conformance clause	5.2.0	5.3.0	N1-021919
2002-12	NP-18	NP-020558	203	1	URL and address assignments	5.2.0	5.3.0	N1-022115
2002-12	NP-18	NP-020559	204	3	Fix gprs-charging-info definition and descriptions	5.2.0	5.3.0	N1-022426
2002-12	NP-18	NP-020559	206		Alignment of the SDP attributes related to QoS integration with IETF	5.2.0	5.3.0	N1-021930
2002-12	NP-18	NP-020559	207	1	Update of the 3GPP-generated SIP P- headers document references	5.2.0	5.3.0	N1-022116
2002-12	NP-18	NP-020559	208	1	Handling of INVITE requests that do not contain SDP	5.2.0	5.3.0	N1-022098
2002-12	NP-18	NP-020559	209	2	UE Registration	5.2.0	5.3.0	N1-022471
2002-12	NP-18	NP-020559	211	1	Usage of private user identity during registration	5.2.0	5.3.0	N1-022083
2002-12	NP-18	NP-020559	212	1	P-CSCF subscription to the users registration-state event	5.2.0	5.3.0	N1-022084
2002-12	NP-18	NP-020559	213	2	Handling of MT call by the P-CSCF	5.2.0	5.3.0	N1-022154
2002-12	NP-18	NP-020559	215		P-CSCF acting as a UA	5.2.0	5.3.0	N1-021939
2002-12	NP-18	NP-020559	216	1	S-CSCF handling of protected registrations	5.2.0	5.3.0	N1-022085
2002-12	NP-18	NP-020560	217	1	S-CSCF handling of subscription to the users registration-state event	5.2.0	5.3.0	N1-022086
2002-12	NP-18	NP-020560	218	1	Determination of MO or MT in I-CSCF	5.2.0	5.3.0	N1-022102
2002-12	NP-18	NP-020560	220		Definition of the NAI and RTCP abbreviations	5.2.0	5.3.0	N1-021944
2002-12	NP-18	NP-020560	222	4	Go related error codes in the UE	5.2.0	5.3.0	N1-022495
2002-12	NP-18	NP-020560	223	1	Clarifications on CCF/ECF addresses	5.2.0	5.3.0	N1-022120
2002-12	NP-18	NP-020560	225	2	Clarifications on dedicated PDP Context for IMS signaling	5.2.0	5.3.0	N1-022156
2002-12	NP-18	NP-020560	228	3	Clarifications on the use of charging correlation information	5.2.0	5.3.0	N1-022425
2002-12	NP-18	NP-020560	232	1	Expires information in REGISTER response	5.2.0	5.3.0	N1-022095
2002-12	NP-18	NP-020560	235	2	Indication of successful establishment of Dedicated Signalling PDP context to the UE	5.2.0	5.3.0	N1-022129
2002-12	NP-18	NP-020560	237		P-CSCF sending 100 (Trying) Response for reINVITE	5.2.0	5.3.0	N1-021998
2002-12	NP-18	NP-020561	239	1	Correction on P-Asserted-Id, P-Preferred-Id, Remote-Party-ID	5.2.0	5.3.0	N1-022100
2002-12	NP-18	NP-020561	240	1	Clarifications to subclause 9.2.5	5.2.0	5.3.0	N1-022137
2002-12	NP-18	NP-020561	242		ENUM translation	5.2.0	5.3.0	N1-022020
2002-12	NP-18	NP-020561	243	1	AS routing	5.2.0	5.3.0	N1-022107
2002-12	NP-18	NP-020561	245	1	Warning header	5.2.0	5.3.0	N1-022108
2002-12	NP-18	NP-020561	246	3	S-CSCF procedure tidyup	5.2.0	5.3.0	N1-022497

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
2002-12	NP-18	NP-020561	247	1	P-CSCF procedure tidyup	5.2.0	5.3.0	N1-022125
2002-12	NP-18	NP-020561	248	2	UE procedure tidyup	5.2.0	5.3.0	N1-022472
2002-12	NP-18	NP-020561	249	3	MESSAGE corrections part 1	5.2.0	5.3.0	N1-022455
2002-12	NP-18	NP-020561	250	2	MESSAGE corrections part 2	5.2.0	5.3.0	N1-022456
2002-12	NP-18	NP-020562	251	2	Security association clarifications	5.2.0	5.3.0	N1-022440
2002-12	NP-18	NP-020562	252	1	The use of security association by the UE	5.2.0	5.3.0	N1-022433
2002-12	NP-18	NP-020562	253	1	UE integrity protected re-registration	5.2.0	5.3.0	N1-022434
2002-12	NP-18	NP-020562	255	3	Handling of default public user identities by the P-CSCF	5.2.0	5.3.0	N1-022496
2002-12	NP-18	NP-020562	263		Fixing ioi descriptions	5.2.0	5.3.0	N1-022266
2002-12	NP-18	NP-020562	264	1	Fix descriptions for ECF/CCF addresses	5.2.0	5.3.0	N1-022447
2002-12	NP-18	NP-020562	266	2	Alignment with draft-ietf-sipping-reg-event-00 and clarification on network initiated deregistration	5.2.0	5.3.0	N1-022493
2002-12	NP-18	NP-020563	267	1	Correction to network initiated re-authentication procedure	5.2.0	5.3.0	N1-022449
2002-12	NP-18	NP-020563	268	1	Registration Expires Timer Default Setting	5.2.0	5.3.0	N1-022439
2002-12	NP-18	NP-020563	269	1	Clarification on Sh interface for charging purposes	5.2.0	5.3.0	N1-022465
2002-12	NP-18	NP-020563	270	2	Clarifications on the scope	5.2.0	5.3.0	N1-022500
2002-12	NP-18	NP-020563	273	1	Add charging info for SUBSCRIBE	5.2.0	5.3.0	N1-022467
2002-12	NP-18	NP-020563	274	1	Profile revisions for RFC 3261 headers	5.2.0	5.3.0	N1-022413
2002-12	NP-18	NP-020563	275		Consistency changes for SDP procedures at MGCF	5.2.0	5.3.0	N1-022345
2002-12	NP-18	NP-020563	276		Proxy support of PRACK	5.2.0	5.3.0	N1-022350
2002-12	NP-18	NP-020563	277		Clarification of transparent handling of parameters in profile	5.2.0	5.3.0	N1-022351
2002-12	NP-18	NP-020564	279	1	Meaning of refresh request	5.2.0	5.3.0	N1-022444
2002-12	NP-18	NP-020564	280		Removal of Caller Preferences dependency	5.2.0	5.3.0	N1-022362
2002-12	NP-18	NP-020564	281	1	P-Access-Network-Info clarifications	5.2.0	5.3.0	N1-022445
2002-12	NP-18	NP-020564	282		Clarification on use of the From header by the UE	5.2.0	5.3.0	N1-022370
2002-12	NP-18	NP-020634	283	2	Support of comp=sigcomp parameter	5.2.0	5.3.0	
2002-12	NP-18	NP-020668	284	4	SDP media policy rejection	5.2.0	5.3.0	
2002-12	NP-18	NP-020567	285	1	Fallback for compression failure	5.2.0	5.3.0	N1-022481
2002-12	NP-18	NP-020564	287	1	SA related procedures	5.2.0	5.3.0	N1-022459
2002-12	NP-18	NP-020568	290	1	Emergency Service correction	5.2.0	5.3.0	N1-022461
2002-12	NP-18	NP-020663	278	4	P-CSCF does not strip away headers	5.2.0	5.3.0	N1-022499
2002-12	NP-18	NP-020557	289		PCF to PDF	5.2.0	5.3.0	N1-022387
2003-03	NP-19	NP-030049	291		Minor correction and consistency changes to general part of profile	5.3.0	5.4.0	N1-030012
2003-03	NP-19	NP-030049	292		SIP profile minor correction and consistency changes	5.3.0	5.4.0	N1-030013
2003-03	NP-19	NP-030049	293	1	Network asserted identity procedure corrections for	5.3.0	5.4.0	N1-030261

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
					the UE			

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
2003-03	NP-19	NP-030049	294	1	Asserted identity inclusion in SIP profile	5.3.0	5.4.0	N1-030300
2003-03	NP-19	NP-030049	296		Profile references relating to registration	5.3.0	5.4.0	N1-030023
2003-03	NP-19	NP-030049	297	2	Reference corrections	5.3.0	5.4.0	N1-030301
2003-03	NP-19	NP-030050	300	1	488 message with a subset of allowed media parameters	5.3.0	5.4.0	N1-030245
2003-03	NP-19	NP-030050	301	1	Handling of Emergency Numbers in P-CSCF	5.3.0	5.4.0	N1-030239
2003-03	NP-19	NP-030050	302	2	Correction of the registration state event package	5.3.0	5.4.0	N1-030268
2003-03	NP-19	NP-030050	305	2	User initiated de-registration at P-CSCF	5.3.0	5.4.0	N1-030295
2003-03	NP-19	NP-030050	306	2	Network-initiated deregistration at UE, P-CSCF, and S-CSCF	5.3.0	5.4.0	N1-030296
2003-03	NP-19	NP-030050	307	2	UE deregistration during established dialogs	5.3.0	5.4.0	N1-030297
2003-03	NP-19	NP-030050	308	2	S-CSCF handling of deregistration during established dialogs	5.3.0	5.4.0	N1-030298
2003-03	NP-19	NP-030050	309	1	S-CSCF handling of established dialogs upon deregistration	5.3.0	5.4.0	N1-030233
2003-03	NP-19	NP-030050	310	2	S-CSCF handling of established dialogs upon registration-lifetime expiration	5.3.0	5.4.0	N1-030299
2003-03	NP-19	NP-030051	311	1	P-CSCF handling of established dialogs upon registration-lifetime expiration	5.3.0	5.4.0	N1-030235
2003-03	NP-19	NP-030051	312	1	Correction of Authentication procedure	5.3.0	5.4.0	N1-030240
2003-03	NP-19	NP-030051	313		Mixed Path header and Service-Route operation	5.3.0	5.4.0	N1-030127
2003-03	NP-19	NP-030051	315	2	Clarifications on updating the authorization token	5.3.0	5.4.0	N1-030255
2003-03	NP-19	NP-030051	318	2	Consideration of P-CSCF/PDF	5.3.0	5.4.0	N1-030307
2003-03	NP-19	NP-030051	319	2	Clarification on GPRS charging information	5.3.0	5.4.0	N1-030308
2003-03	NP-19	NP-030051	323	1	P-Access-Network-Info procedure corrections for the UE	5.3.0	5.4.0	N1-030250
2003-03	NP-19	NP-030051	324	1	P-Access-Network-Info procedure corrections for the S-CSCF	5.3.0	5.4.0	N1-030251
2003-03	NP-19	NP-030051	326	1	Updating user agent related profile tables	5.3.0	5.4.0	N1-030260
2003-03	NP-19	NP-030052	327	2	Cleanup and clarification to the registration and authentication procedure	5.3.0	5.4.0	N1-030282
2003-03	NP-19	NP-030052	328	1	Corrections to the reg event package	5.3.0	5.4.0	N1-030230
2003-03	NP-19	NP-030052	330	2	Clarifications for setting up separate PDP contexts in case of SBLP	5.3.0	5.4.0	N1-030288
2003-03	NP-19	NP-030052	331	2	Handling of the P-Media-Autohorization header	5.3.0	5.4.0	N1-030289
2003-03	NP-19	NP-030052	333	3	Removal of P-Asserted-Identity from clause 7 of 24.229	5.3.0	5.4.0	N1-030310
2003-03	NP-19	NP-030052	334		P-CSCF general procedure corrections	5.3.0	5.4.0	N1-030182
2003-03	NP-19	NP-030052	335	2	Usage of Contact in UE's registration procedure	5.3.0	5.4.0	N1-030281
2003-03	NP-19	NP-030052	337		Usage of P-Asserted-Identity for responses	5.3.0	5.4.0	N1-030193
2003-03	NP-19	NP-030052	339	2	Authorization for registration event package	5.3.0	5.4.0	N1-030285
2003-03	NP-19	NP-030052	341	1	P-CSCF subscription to reg event	5.3.0	5.4.0	N1-030284

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
2003-06	NP-20	NP-030275	295	4	Security agreement inclusion in SIP profile	5.4.0	5.5.0	N1-030939
2003-06	NP-20	NP-030275	322	5	3GPP P-header inclusion in SIP profile	5.4.0	5.5.0	N1-030938
2003-06	NP-20	NP-030275	332	5	Change of IP address for the UE	5.4.0	5.5.0	N1-030923
2003-06	NP-20	NP-030275	342		Removal of the requirement for UE re-authentication initiated by HSS	5.4.0	5.5.0	N1-030349
2003-06	NP-20	NP-030275	343	2	UE behaviour on reception of 420 (Bad Extension) message	5.4.0	5.5.0	N1-030552
2003-06	NP-20	NP-030275	347	2	Handling of DTMF	5.4.0	5.5.0	N1-030551
2003-06	NP-20	NP-030276	348	1	Format of Tel URL in P-Asserted-Id	5.4.0	5.5.0	N1-030510
2003-06	NP-20	NP-030276	349		Delete Note on header stripping/SDP manipulation	5.4.0	5.5.0	N1-030387
2003-06	NP-20	NP-030276	354	1	Clarifications on using DNS procedures	5.4.0	5.5.0	N1-030520
2003-06	NP-20	NP-030276	356	4	Addition of procedures at the AS for SDP	5.4.0	5.5.0	N1-030942
2003-06	NP-20	NP-030276	357	1	Usage of P-Associated-URI	5.4.0	5.5.0	N1-030499
2003-06	NP-20	NP-030276	359	1	Network-initiated deregistration at UE and P-CSCF	5.4.0	5.5.0	N1-030501
2003-06	NP-20	NP-030276	360	2	Barred identities	5.4.0	5.5.0	N1-030550
2003-06	NP-20	NP-030276	365	1	PDP contex subject to SBLP cannot be reused by other IMS sessions	5.4.0	5.5.0	N1-030513
2003-06	NP-20	NP-030276	368	1	User authentication failure cleanups	5.4.0	5.5.0	N1-030506
2003-06	NP-20	NP-030277	369	3	S-CSCF behavior correction to enable call forwarding	5.4.0	5.5.0	N1-030931
2003-06	NP-20	NP-030277	370	1	SUBSCRIBE request information stored at the P-CSCF and S-CSCF	5.4.0	5.5.0	N1-030521
2003-06	NP-20	NP-030277	371	1	Profile Tables - Transparency	5.4.0	5.5.0	N1-030858
2003-06	NP-20	NP-030277	375	1	Profile Tables - Major Capability Corrections	5.4.0	5.5.0	N1-030860
2003-06	NP-20	NP-030277	376	2	Profile Tables - Deletion of Elements not used in 24.229	5.4.0	5.5.0	N1-030921
2003-06	NP-20	NP-030277	377	1	Use of the QoS parameter 'signalling information' for a signalling PDP context	5.4.0	5.5.0	N1-030840
2003-06	NP-20	NP-030277	378	2	Deregistration of a PUID (not the last one)	5.4.0	5.5.0	N1-030919
2003-06	NP-20	NP-030277	379	2	'Last registered public user identity' terminology change	5.4.0	5.5.0	N1-030920
2003-06	NP-20	NP-030277	380	1	Check Integrity Protection for P-Access-Network-Info header	5.4.0	5.5.0	N1-030881
2003-06	NP-20	NP-030278	381	1	PCSCF setting of Integrity protection indicator and checking of Security Verify header	5.4.0	5.5.0	N1-030882
2003-06	NP-20	NP-030278	383	1	Consistent treatment of register and de-register	5.4.0	5.5.0	N1-030884
2003-06	NP-20	NP-030278	384	1	Optionality of sending CK is removed	5.4.0	5.5.0	N1-030885
2003-06	NP-20	NP-030278	385	1	Addition of note and Correction of References regarding security associations and registration	5.4.0	5.5.0	N1-030886
2003-06	NP-20	NP-030278	387	1	Subscription/Registration refresh time	5.4.0	5.5.0	N1-030887
2003-06	NP-20	NP-030278	388	1	Corrections to use of IK	5.4.0	5.5.0	N1-030863
2003-06	NP-20	NP-030278	390		Mobile-originating case at UE	5.4.0	5.5.0	N1-030647

Change history									
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc	
2003-06	NP-20	NP-030278	394	2	Re-authentication procedure.	5.4.0	5.5.0	N1-030917	
2003-06	NP-20	NP-030278	395		Replacement of SIP URL with SIP URI	5.4.0	5.5.0	N1-030652	
2003-06	NP-20	NP-030279	397	2	Notification about registration state	5.4.0	5.5.0	N1-030926	
2003-06	NP-20	NP-030279	402	1	Handling of P-Asserted ID in MGCF	5.4.0	5.5.0	N1-030848	
2003-06	NP-20	NP-030279	404	1	S-CSCF initiated release of calls to circuit switched network	5.4.0	5.5.0	N1-030873	
2003-06	NP-20	NP-030279	405	2	Supported Integrity algorithms	5.4.0	5.5.0	N1-030927	
2003-06	NP-20	NP-030279	407	1	RFC 3524, Single Reservation Flows	5.4.0	5.5.0	N1-030851	
2003-06	NP-20	NP-030279	410	1	Clarification of the S-CSCF's handling of the P-access-network-info header	5.4.0	5.5.0	N1-030868	
2003-06	NP-20	NP-030279	411	2	Port numbers in the RR header entries	5.4.0	5.5.0	N1-030941	
2003-06	NP-20	NP-030279	412	2	Registration abnormal cases	5.4.0	5.5.0	N1-030928	
2003-06	NP-20	NP-030280	415		Minor correction to section 5.4.5.1.2	5.4.0	5.5.0	N1-030720	
2003-06	NP-20	NP-030280	417	1	Introduction of RTCP bandwidth	5.4.0	5.5.0	N1-030872	
2003-06	NP-20	NP-030280	418	1	Registratin Event - Shortend	5.4.0	5.5.0	N1-030844	
2003-06	NP-20	NP-030280	419	1	HSS / S-CSCF text relating to user deregistration	5.4.0	5.5.0	N1-030845	
2003-06	NP-20	NP-030280	421		Handling of unknown methods at the P-CSCF	5.4.0	5.5.0	N1-030743	
2003-06	NP-20	NP-030280	422	1	Definitions and abbreviations update	5.4.0	5.5.0	N1-030870	
2003-06	NP-20	NP-030280	423		Removal of hanging paragraph	5.4.0	5.5.0	N1-030752	
2003-06	NP-20	NP-030280	424		Access network charging information	5.4.0	5.5.0	N1-030753	
2003-06	NP-20	NP-030280	425	1	UE procedure tidyup	5.4.0	5.5.0	N1-030871	
2003-06	NP-20	NP-030281	426		P-CSCF procedure tidyup	5.4.0	5.5.0	N1-030755	
2003-06	NP-20	NP-030281	427		I-CSCF procedure tidyup	5.4.0	5.5.0	N1-030756	
2003-06	NP-20	NP-030281	428		S-CSCF procedure tidyup	5.4.0	5.5.0	N1-030757	
2003-06	NP-20	NP-030281	429		BGCF procedure tidyup	5.4.0	5.5.0	N1-030758	
2003-06	NP-20	NP-030281	430		AS procedure tidyup	5.4.0	5.5.0	N1-030759	
2003-06	NP-20	NP-030281	431		MRFC procedure tidyup	5.4.0	5.5.0	N1-030760	
2003-06	NP-20	NP-030281	434	1	SDP procedure tidyup	5.4.0	5.5.0	N1-030852	
2003-06	NP-20	NP-030281	438	2	Profile Tables – Further Corrections	5.4.0	5.5.0	N1-030935	
2003-06	NP-20	NP-030281	439	3	AS's subscription for the registration state event package	5.4.0	5.5.0	N1-030940	
2003-06	NP-20	NP-030281	440		Temporary Public User Identity in re- and de-REGISTER requests	5.4.0	5.5.0	N1-030792	
2003-09	NP-21	NP-030412	444	2	All non-REGISTER requests must be integrity protected	5.5.0	5.6.0	N1-031328	
2003-09	NP-21	NP-030412	445		Download of all service profiles linked to PUID being registered and implicitly registered	5.5.0	5.6.0	N1-031010	
2003-09	NP-21	NP-030412	448	3	Authentication at UE	5.5.0	5.6.0	N1-031326	
2003-09	NP-21	NP-030412	449	1	Network authentication failure at the UE	5.5.0	5.6.0	N1-031242	

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
2003-09	NP-21	NP-030412	451	3	Handling of security association	5.5.0	5.6.0	N1-031327
2003-09	NP-21	NP-030412	452	1	Re-authentication timer at S-CSCF	5.5.0	5.6.0	N1-031274
2003-09	NP-21	NP-030412	455	2	Authentication failure at S-CSCF	5.5.0	5.6.0	N1-031285
2003-09	NP-21	NP-030413	456	2	Subscription termination sent by the S-CSCF	5.5.0	5.6.0	N1-031276
2003-09	NP-21	NP-030413	457		Subscription termination at the P-CSCF	5.5.0	5.6.0	N1-031032
2003-09	NP-21	NP-030413	458		Network -initiated deregistration at P-CSCF	5.5.0	5.6.0	N1-031033
2003-09	NP-21	NP-030349	459	2	Notification about registration status at AS	5.5.0	5.6.0	
2003-09	NP-21	NP-030413	461	1	Service profile	5.5.0	5.6.0	N1-031233
2003-09	NP-21	NP-030413	466	1	Requirements on Preconditions	5.5.0	5.6.0	N1-031246
2003-09	NP-21	NP-030413	467	1	Call forwarding cleanup	5.5.0	5.6.0	N1-031238
2003-09	NP-21	NP-030413	468		Update of references	5.5.0	5.6.0	N1-031094
2003-09	NP-21	NP-030414	470	1	Adding P-Asserted-Identity headers to NE initiated subscriptions	5.5.0	5.6.0	N1-031314
2003-09	NP-21	NP-030414	479	1	Replace USIM by ISIM for user identity storage	5.5.0	5.6.0	N1-031247
2003-09	NP-21	NP-030414	481	1	24.229 R5 CR: Corrections to Profile Tables	5.5.0	5.6.0	N1-031248
2003-09	NP-21	NP-030414	482		24.229 R5 CR: Setting of SUBSCRIBE expiration time	5.5.0	5.6.0	N1-031140
2003-09	NP-21	NP-030414	483	3	24.229 R5 CR: Alignment of IMS Compression with RFC 3486	5.5.0	5.6.0	N1-031335
2003-09	NP-21	NP-030418	465	1	Alignment with TS for policy control over Gq interface	5.6.0	6.0.0	N1-031267
2003-09	NP-21	NP-030418	472	1	I-CSCF procedures for openness	5.6.0	6.0.0	N1-031304
2003-09	NP-21	NP-030433	473	3	Registration from multiple terminals and forking	5.6.0	6.0.0	
2003-09	NP-21	NP-030419	480	3	Access Independent IMS	5.6.0	6.0.0	N1-031333
2003-12	NP-22	NP-030482	487	1	Registration amendments in profile	6.0.0	6.1.0	N1-031627
2003-12	NP-22	NP-030482	489		Privacy considerations for the UE	6.0.0	6.1.0	N1-031351
2003-12	NP-22	NP-030476	493		INVITE dialog amendments in profile	6.0.0	6.1.0	N1-031359
2003-12	NP-22	NP-030482	494		Correction of I-CSCF handling of multiple private user identities with same public user identity	6.0.0	6.1.0	N1-031375
2003-12	NP-22	NP-030476	496	1	P-Asserted-Identity in SUBSCRIBE requests	6.0.0	6.1.0	N1-031632
2003-12	NP-22	NP-030482	497		Addition of reference to Gq interface	6.0.0	6.1.0	N1-031378
2003-12	NP-22	NP-030476	503	2	Update of HSS information at deregistration	6.0.0	6.1.0	N1-031720
2003-12	NP-22	NP-030482	507		Unavailable definitions	6.0.0	6.1.0	N1-031392
2003-12	NP-22	NP-030476	509		Reference corrections	6.0.0	6.1.0	N1-031394
2003-12	NP-22	NP-030484	510	1	UICC related changes for IMS commonality and interoperability	6.0.0	6.1.0	N1-031682
2003-12	NP-22	NP-030484	511		Interoperability and commonality; definition of scope	6.0.0	6.1.0	N1-031427
2003-12	NP-22	NP-030484	512		Interoperability and commonality; addition of terminology	6.0.0	6.1.0	N1-031428
2003-12	NP-22	NP-030484	513		Interoperability and commonality; media grouping	6.0.0	6.1.0	N1-031429

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
2003-12	NP-22	NP-030484	515		Interoperability and commonality; charging information	6.0.0	6.1.0	N1-031431
2003-12	NP-22	NP-030482	518	1	Profile support of RFC 3326: The Reason Header Field for the Session Initiation Protocol	6.0.0	6.1.0	N1-031681
2003-12	NP-22	NP-030482	519		Profile support of RFC 3581: An Extension to the Session Initiation Protocol (SIP) for Symmetric Response Routing	6.0.0	6.1.0	N1-031439
2003-12	NP-22	NP-030484	522	1	Clause 9 restructuring	6.0.0	6.1.0	N1-031684
2003-12	NP-22	NP-030477	524	2	Correct use of RAND during re-synchronisation failures	6.0.0	6.1.0	N1-031712
2003-12	NP-22	NP-030478	526	1	Correction to description or RES/XRES usage	6.0.0	6.1.0	N1-031617
2003-12	NP-22	NP-030483	529		Corrections on charging specification number	6.0.0	6.1.0	N1-031469
2003-12	NP-22	NP-030581	531	3	Corrections on ICID for REGISTER	6.0.0	6.1.0	
2003-12	NP-22	NP-030478	543	1	Correction of user initiated re-registration	6.0.0	6.1.0	N1-031619
2003-12	NP-22	NP-030483	551	1	IMS trust domain in Rel 6	6.0.0	6.1.0	N1-031622
2003-12	NP-22	NP-030478	556	1	P-CSCF and UE handling of Security Associations	6.0.0	6.1.0	N1-031624
2003-12	NP-22	NP-030483	560	2	SDP offer handling in SIP responses in S-CSCF and P-CSCF	6.0.0	6.1.0	N1-031727
2003-12	NP-22	NP-030483	564	1	SIP compression	6.0.0	6.1.0	N1-031705
2003-12	NP-22	NP-030478	566		Sending challenge	6.0.0	6.1.0	N1-031580
2003-12	NP-22	NP-030480	568	2	Reg-await-auth timer value	6.0.0	6.1.0	N1-031716
2003-12	NP-22	NP-030480	571	1	Network initiated deregistration	6.0.0	6.1.0	N1-031707
2003-12	NP-22	NP-030483	572		Text harmonisation with 3GPP2	6.0.0	6.1.0	N1-031589
2003-12	NP-22	NP-030483	573	1	Procedures in the absence of UICC	6.0.0	6.1.0	N1-031680
2003-12	NP-22	NP-030483	575	1	P-Access-Network-Info changes	6.0.0	6.1.0	N1-031683
2004-03	NP-23	NP-040027	488	3	Completion of major capabilities table in respect of privacy	6.1.0	6.2.0	N1-040406
2004-03	NP-23	NP-040027	499	5	P-CSCF integrity protection	6.1.0	6.2.0	N1-040500
2004-03	NP-23	NP-040032	578	1	UE requesting no-fork	6.1.0	6.2.0	N1-040184
2004-03	NP-23	NP-040032	579	1	Inclusion of caller preferences into profile	6.1.0	6.2.0	N1-040284
2004-03	NP-23	NP-040027	586	1	Network-initiated re-authentication	6.1.0	6.2.0	N1-040391
2004-03	NP-23	NP-040032	588	1	Re-authentication - Abnormal cases	6.1.0	6.2.0	N1-040393
2004-03	NP-23	NP-040027	592	1	Integrity protected correction	6.1.0	6.2.0	N1-040398
2004-03	NP-23	NP-040032	596	1	Sec-agree parameter in "Proxy-Require" header	6.1.0	6.2.0	N1-040400
2004-03	NP-23	NP-040027	600	2	Handling of record-route in target refresh and subsequent request	6.1.0	6.2.0	N1-040481
2004-03	NP-23	NP-040035	603		Cleanup for IP-CAN and GPRS	6.1.0	6.2.0	N1-040304
2004-03	NP-23	NP-040032	604		Forking in S-CSCF	6.1.0	6.2.0	N1-040325
2004-03	NP-23	NP-040108	605	3	Determination of S-CSCF role	6.1.0	6.2.0	
2004-03	NP-23	NP-040134	608	3	Unprotected deregistration	6.1.0	6.2.0	

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
2004-03	NP-23	NP-040029	610		Sending authentication challenge	6.1.0	6.2.0	N1-040331
2004-03	NP-23	NP-040033	613		Reference to PDF operation	6.1.0	6.2.0	N1-040334
2004-03	NP-23	NP-040029	615	1	Support of MESSAGE (Profile Tables)	6.1.0	6.2.0	N1-040466
2004-03	NP-23	NP-040033	616	2	Introduction of PSI Routing to 24.229	6.1.0	6.2.0	N1-040487
2004-03	NP-23	NP-040033	617	1	P-CSCF Re-selection	6.1.0	6.2.0	N1-040463
2004-03	NP-23	NP-040033	618		I-CSCF does not re-select S-CSCF during re-registration	6.1.0	6.2.0	N1-040344
2004-03	NP-23	NP-040033	620	1	Handling of media authorization token due to messaging	6.1.0	6.2.0	N1-040430
2004-06	NP-24	NP-040191	621	2	Forking requests terminating at the served user	6.2.0	6.3.0	N1-040739
2004-06	NP-24	NP-040191	624	1	Abbreviations	6.2.0	6.3.0	N1-040691
2004-06	NP-24	NP-040191	625	5	Removal of restriction for multiple SIP sessions on a single PDP context	6.2.0	6.3.0	N1-041053
2004-06	NP-24	NP-040191	626	3	Record route in S-CSCF	6.2.0	6.3.0	N1-041061
2004-06	NP-24	NP-040189	627	3	Correction of reception of media authorization token	6.2.0	6.3.0	N1-040994
2004-06	NP-24	NP-040191	628	3	Introduction of PSI Routing to 24.229	6.2.0	6.3.0	N1-041059
2004-06	NP-24	NP-040198	629	2	Addition of PRESNC material	6.2.0	6.3.0	N1-040996
2004-06	NP-24	NP-040189	631	1	Missing statements regarding P-Charging-Function-Addresses header	6.2.0	6.3.0	N1-040987
2004-06	NP-24	NP-040191	634	1	Multiple registrations	6.2.0	6.3.0	N1-041054
2004-06	NP-24	NP-040192	635	1	Network-initiated deregistration	6.2.0	6.3.0	N1-041055
2004-06	NP-24	NP-040192	636		Network-initiated re-authentication	6.2.0	6.3.0	N1-040778
2004-06	NP-24	NP-040192	637	1	Mobile-initiated deregistration	6.2.0	6.3.0	N1-041056
2004-06	NP-24	NP-040192	638	1	Notification about registration state	6.2.0	6.3.0	N1-041057
2004-06	NP-24	NP-040189	642	3	Syntax of the extension to the P-Charging-Vector header field	6.2.0	6.3.0	N1-041100
2004-06	NP-24	NP-040192	643	2	Session Timer	6.2.0	6.3.0	N1-041095
2004-06	NP-24	NP-040193	644	3	Session initiation without preconditions	6.2.0	6.3.0	N1-041096
2004-06	NP-24	NP-040192	645	1	IMS Conferencing: Inclusion of Profile Tables to TS 24.229	6.2.0	6.3.0	N1-041015
2004-06	NP-24	NP-040189	649	1	Revisions due to published version of draft-ietf-sipping-reg-event	6.2.0	6.3.0	N1-040992
2004-06	NP-24	NP-040198	652		Creation of separate event package table for UA role	6.2.0	6.3.0	N1-041066
2004-09	NP-25	NP-040380	658		Correction of User identity verification at the AS	6.3.0	6.4.0	N1-041344
2004-09	NP-25	NP-040381	666	1	NOTIFY requests	6.3.0	6.4.0	N1-041586
2004-09	NP-25	NP-040381	654	4	Callee capabilities and Registration	6.3.0	6.4.0	N1-041315
2004-09	NP-25	NP-040381	668	2	Network deregistration	6.3.0	6.4.0	N1-041614
2004-09	NP-25	NP-040381	682	1	SDP parameters received by the S-CSCF and the P-CSCF in the 200 OK message	6.3.0	6.4.0	N1-041592
2004-09	NP-25	NP-040381	661	1	Call Release	6.3.0	6.4.0	N1-041589

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
2004-09	NP-25	NP-040381	659		Multiple public ID registration	6.3.0	6.4.0	N1-041350
2004-09	NP-25	NP-040381	660		Standalone transactions	6.3.0	6.4.0	N1-041351
2004-09	NP-25	NP-040381	663		Unprotected REGISTER	6.3.0	6.4.0	N1-041354
2004-09	NP-25	NP-040381	662	1	Session timer	6.3.0	6.4.0	N1-041590
2004-09	NP-25	NP-040381	665		Contact in SUBSCRIBE request	6.3.0	6.4.0	N1-041372
2004-09	NP-25	NP-040381	650	2	Support of draft-ietf-sip-replaces	6.3.0	6.4.0	N1-041391
2004-09	NP-25	NP-040381	657	1	Support of draft-ietf-sip-join	6.3.0	6.4.0	N1-041393
2004-09	NP-25	NP-040381	656	1	Support of draft-ietf-sip-referredby	6.3.0	6.4.0	N1-041263
2004-09	NP-25	NP-040381	678		Support of TLS	6.3.0	6.4.0	N1-041462
2004-09	NP-25	NP-040381	688	2	Filtering of the P-Access-Network-Info header by the S-CSCF and privacy rules	6.3.0	6.4.0	N1-041641
2004-09	NP-25	NP-040382	692	2	Ipv6 IPv4 interworking	6.3.0	6.4.0	N1-041630
2004-09	NP-25	NP-040383	689	2	Addition of session set-up not requiring preconditions and reliable transport of provisional responses.	6.3.0	6.4.0	N1-041632
2004-09	NP-25	NP-040385	697		Missing value for the event attribute within the <contact> element of NOTIFY body	6.3.0	6.4.0	N1-041540
2004-09	NP-25	NP-040385	698		HSS initiated deregistration	6.3.0	6.4.0	N1-041549
2004-09	NP-25	NP-040385	673		Syntax correction for the P-Charging-Vector header	6.3.0	6.4.0	N1-041434
2004-09	NP-25	NP-040385	699	1	Network initiated deregistration upon UE roaming and registration to a new network	6.3.0	6.4.0	N1-041629
2004-12	NP-26	NP-040506	651	4	Downloading the user profile based on User-Data-Request-Type	6.4.0	6.5.0	N1-042031
2004-12	NP-26	NP-040506	703	2	SDP Encryption	6.4.0	6.5.0	N1-042095
2004-12	NP-26	NP-040506	704	1	RTCP streams	6.4.0	6.5.0	N1-042019
2004-12	NP-26	NP-040506	709		Contact in 200(OK) response	6.4.0	6.5.0	N1-041725
2004-12	NP-26	NP-040506	710	1	P-Access-Network-Info header	6.4.0	6.5.0	N1-042020
2004-12	NP-26	NP-040506	711	1	P-Called-Party-ID header	6.4.0	6.5.0	N1-041954
2004-12	NP-26	NP-040506	713	1	IMS-ALG routing	6.4.0	6.5.0	N1-042021
2004-12	NP-26	NP-040506	714	1	Public User Identity	6.4.0	6.5.0	N1-042022
2004-12	NP-26	NP-040506	715	1	"Pres" and "im" URIs	6.4.0	6.5.0	N1-042023
2004-12	NP-26	NP-040502	723	1	Correction Term IOI handling	6.4.0	6.5.0	N1-041956
2004-12	NP-26	NP-040502	725	1	Request handling in S-CSCF originating case	6.4.0	6.5.0	N1-041958
2004-12	NP-26	NP-040502	727	1	Request handling in S-CSCF - terminating case	6.4.0	6.5.0	N1-041960
2004-12	NP-26	NP-040506	728		SBLP and non-realtime PDP contexts	6.4.0	6.5.0	N1-041797
2004-12	NP-26	NP-040590	730	2	Reference updates	6.4.0	6.5.0	N1-042085
2004-12	NP-26	NP-040590	733	3	Support for extended SigComp	6.4.0	6.5.0	N1-042117
2004-12	NP-26	NP-040590	734	2	Correction to subclause 5.1.3 of TS 24,229	6.4.0	6.5.0	N1-042120
2004-12	NP-26	NP-040590	735	1	Correction to subclause 5.1.4.1.2.3 of TS 24,,229	6.4.0	6.5.0	N1-042084
2004-12	NP-26	NP-040502	738	1	Population of Via header when using REGISTER	6.4.0	6.5.0	N1-041962

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
					method			
2004-12	NP-26	NP-040590	739		Tel-URI related reference updates	6.4.0	6.5.0	N1-041869
2004-12	NP-26	NP-040590	741	1	Throttling	6.4.0	6.5.0	N1-042086
2004-12	NP-26	NP-040590	742		Editorial correction resulting from CR665	6.4.0	6.5.0	N1-041881
2004-12	NP-26	NP-040590	743		Unprotected REGISTER corrections	6.4.0	6.5.0	N1-041882
2004-12	NP-26	NP-040590	744	1	Corrections to receiving SDP offer in 200 (OK) response	6.4.0	6.5.0	N1-042087
2004-12	NP-26	NP-040590	745	1	Privacy corrections	6.4.0	6.5.0	N1-042085
2004-12	NP-26	NP-040590	747	2	Syntax of the P-Charging-Vector	6.4.0	6.5.0	N1-042105
2004-12	NP-26	NP-040590	752	2	Unavailability of the access-network-charging-info when the session is established without SBLP	6.4.0	6.5.0	N1-042106
2004-12	NP-26	NP-040590	753	1	SIP messages carrying the access-network-charging-info for sessions without preconditions	6.4.0	6.5.0	N1-042089
2004-12	NP-26	NP-040590	755	1	Network-initiated deregistration for multiple UEs sharing the same user public identity and for the old contact information of a roaming UE registered in a new network	6.4.0	6.5.0	N1-042090
2004-12	NP-26	NP-040502	765	1	Interaction between S-CSCF and HSS in Network initiated deregistration procedure	6.4.0	6.5.0	N1-041966
2004-12	NP-26	NP-040502	768	1	Downloading of user profile	6.4.0	6.5.0	N1-042103
2005-01					Fix Word problem	6.5.0	6.5.1	

History

Document history		
V6.5.1	January 2005	Publication