

ETSI TS 129 522 V17.15.0 (2024-09)



**5G;
5G System;
Network Exposure Function Northbound APIs;
Stage 3
(3GPP TS 29.522 version 17.15.0 Release 17)**



Reference

RTS/TSGC-0329522vhf0

Keywords

5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	23
1 Scope	24
2 References	24
3 Definitions and abbreviations.....	26
3.1 Definitions	26
3.2 Abbreviations	26
4 NEF Northbound Interface	27
4.1 Overview	27
4.2 Reference model.....	29
4.3 Functional elements.....	30
4.3.1 NEF.....	30
4.3.2 AF	31
4.4 Procedures over NEF Northbound Interface	31
4.4.1 Introduction.....	31
4.4.2 Procedures for Monitoring.....	31
4.4.3 Procedures for Device Triggering.....	37
4.4.4 Procedures for resource management of Background Data Transfer.....	37
4.4.5 Procedures for CP Parameters Provisioning	37
4.4.6 Procedures for PFD Management.....	39
4.4.7 Procedures for Traffic Influence	39
4.4.7.1 General	39
4.4.7.2 AF request identified by UE address.....	40
4.4.7.3 AF request not identified by UE address.....	40
4.4.7.4 Handling of UP path management event notification	41
4.4.8 Procedures for changing the chargeable party at session set up or during the session.....	41
4.4.9 Procedures for setting up an AF session with required QoS.....	42
4.4.10 Procedures for MSISDN-less Mobile Originated SMS	45
4.4.11 Procedures for Network Configuration Parameters Provisioning.....	45
4.4.12 Procedures for Non-IP data delivery.....	46
4.4.12.1 General	46
4.4.12.2 NIDD configuration Triggered by the NEF	46
4.4.12.3 NIDD configuration triggered by the AF and NIDD delivery	46
4.4.13 Procedures for RACS Parameter Provisioning	47
4.4.14 Procedures for analytics information exposure.....	47
4.4.14.1 Subscription/unsubscription to notification of analytics information	47
4.4.14.2 Fetch analytics information.....	49
4.4.15 Procedures for 5G LAN Parameter Provisioning.....	49
4.4.15.1 General	49
4.4.15.2 Creation of a new subscription for 5G LAN parameter provisioning	50
4.4.15.3 Modification of an existing subscription for 5G LAN parameter provisioning	50
4.4.15.4 Deletion of an existing subscription for 5G LAN parameter provisioning	50
4.4.16 Procedures for applying BDT policy	50
4.4.17 Procedures for Enhanced Coverage Restriction Control.....	51
4.4.18 Procedures for IPTV Configuration.....	51
4.4.20 Procedures for service specific parameter provisioning	53
4.4.21 Procedures for ACS configuration parameter provisioning.....	55
4.4.22 Procedures for Mobile Originated Location Request.....	56
4.4.22.1 General	56
4.4.22.2 Location Update Notification triggered by UE	56
4.4.23 Procedures for AKMA.....	56
4.4.23.1 General	56

4.4.23.2	AKMA Application Key Request	56
4.4.24	Procedures for Time Synchronization Exposure.....	56
4.4.24.0	General	56
4.4.24.1	Subscription and unsubscription to notification of Time Synchronization Capabilities	57
4.4.24.2	Time Synchronization Exposure Configuration.....	58
4.4.24.3	Management of 5G access stratum time distribution	59
4.4.26	Procedures for AM Policy Authorization	60
4.4.26.1	General	60
4.4.26.2	Creation of a new Individual Application AM Context	60
4.4.26.3	Modification of an existing individual Application AM Context	61
4.4.26.4	Deletion of an existing individual Application AM Context	61
4.4.26.5	Create or modify subscription to notification of AM policy event	62
4.4.26.6	Unsubscription to notification of AM policy event.....	62
4.4.26.7	Notification of AM policy event	62
4.4.27	Procedures for AF triggered Access and Mobility Influence.....	63
4.4.27.1	General	63
4.4.27.2	Create the AM Influence Subscription.....	63
4.4.27.3	Modify the AM Influence Subscription	63
4.4.27.4	Delete the AM Influence Subscription.....	63
4.4.27.5	Notification of service area coverage outcome events	64
4.4.28	Procedures for Northbound EAS Deployment Information management	64
4.4.28.1	General	64
4.4.28.2	Creation of a new Individual EAS Deployment information resource.....	64
4.4.28.3	Modification of an existing individual EAS Deployment Information resource.....	65
4.4.28.4	Deletion of an existing individual EAS Deployment Information resource.....	65
4.4.28.5	Deletion of EAS Deployment Information based on given criteria	65
4.4.29	Procedures for MBS Management.....	65
4.4.29.1	General	65
4.4.29.2	Procedures for MBS TMGI management	66
4.4.29.2.1	General	66
4.4.29.2.2	Procedure for MBS TMGI(s) allocation or MBS TMGI(s) expiry time refresh.....	66
4.4.29.2.3	Procedure for MBS TMGI(s) deallocation	67
4.4.29.2.4	Procedure for MBS TMGI(s) timer expiry notification.....	67
4.4.29.3	Procedures for MBS session management	68
4.4.29.3.1	General	68
4.4.29.3.2	Procedure for MBS session creation.....	68
4.4.29.3.3	Procedure for MBS session update.....	70
4.4.29.3.4	Procedure for MBS session deletion.....	71
4.4.29.3.5	Procedure for MBS session status subscription	71
4.4.29.3.6	Procedure for MBS session status unsubscription	71
4.4.29.3.7	Procedure for MBS session status notification	72
4.4.29.4	Procedures for MBS Parameters Provisioning	72
4.4.29.4.1	General	72
4.4.29.4.2	Procedure for multicast MBS Session Authorization information provisioning	72
4.4.29.5	Procedures for MBS User Service management	74
4.4.29.5.1	General	74
4.4.29.5.2	Procedure for MBS User Service creation.....	74
4.4.29.5.3	Procedure for MBS User Service retrieval	74
4.4.29.5.4	Procedure for MBS User Service update/modification	74
4.4.29.5.5	Procedure for MBS User Service deletion.....	75
4.4.29.6	Procedures for MBS User Data Ingest Session management.....	75
4.4.29.6.1	General	75
4.4.29.6.2	Procedure for MBS User Data Ingest Session creation	75
4.4.29.6.3	Procedure for MBS User Data Ingest Session retrieval.....	76
4.4.29.6.4	Procedure for MBS User Data Ingest Session update/modification	76
4.4.29.6.5	Procedure for MBS User Data Ingest Session deletion	76
4.4.29.6.6	Procedure for MBS User Data Ingest Session Status Subscription	77
4.4.29.6.7	Procedure for MBS User Data Ingest Session Status update/modification	77
4.4.29.6.8	Procedure for MBS User Data Ingest Session Status Unsubscription	78
4.4.29.6.9	Procedure for MBS User Data Ingest Session Status Notification	78
4.4.30	Procedures for Data Reporting.....	78
4.4.30.1	General	78

4.4.30.2	Procedure for Data Reporting Session Management.....	79
4.4.30.3	Procedure for Data Report	79
4.4.31	Procedures for Data Reporting Provisioning	79
4.4.31.1	General	79
4.4.31.2	Procedure for Data Reporting Provisioning Session Management	79
4.4.31.3	Procedure for Data Reporting Configuration management	80
4.4.32	Procedures for AF specific UE ID retrieval.....	81
4.4.32.1	General	81
4.4.32.2	Retrieve AF specific UE ID service operation	81
4.4.33	Procedures for Media Streaming Event Exposure	82
4.4.33.1	General	82
4.4.33.2	Procedure for Media Streaming Event Exposure Subscription Creation	82
4.4.33.3	Procedure for Media Streaming Event Exposure Subscription Update.....	82
4.4.33.4	Procedure for Media Streaming Event Exposure Unsubscription.....	83
4.4.33.5	Procedure for Media Streaming Event Exposure Notification	83
5	NEF Northbound APIs	83
5.1	Introduction	83
5.2	Information applicable to several APIs	84
5.3	Reused APIs	85
5.4	TrafficInfluence API	85
5.4.1	Resources.....	85
5.4.1.1	Overview.....	85
5.4.1.2	Resource: Traffic Influence Subscription.....	86
5.4.1.2.1	Introduction	86
5.4.1.2.2	Resource Definition.....	86
5.4.1.2.3	Resource Methods	87
5.4.1.2.3.1	General.....	87
5.4.1.2.3.2	GET.....	87
5.4.1.2.3.3	POST.....	88
5.4.1.3	Resource: Individual Traffic Influence Subscription	88
5.4.1.3.1	Introduction	88
5.4.1.3.2	Resource Definition.....	88
5.4.1.3.3	Resource Methods	88
5.4.1.3.3.1	General.....	88
5.4.1.3.3.2	GET.....	89
5.4.1.3.3.3	PUT	89
5.4.1.3.3.4	PATCH	90
5.4.1.3.3.5	DELETE	91
5.4.2	Notifications	92
5.4.2.1	Introduction.....	92
5.4.2.2	Event Notification.....	92
5.4.2.2.1	Description	92
5.4.2.2.2	Target URI.....	93
5.4.2.2.3	Operation Definition.....	93
5.4.2.3	Acknowledgement of event notification	94
5.4.2.3.1	Description	94
5.4.2.3.2	Target URI.....	94
5.4.2.3.3	Operation Definition.....	94
5.4.2.3.3.1	Notification via HTTP POST.....	94
5.4.3	Data Model	95
5.4.3.1	General	95
5.4.3.2	Reused data types.....	95
5.4.3.3	Structured data types	96
5.4.3.3.1	Introduction	96
5.4.3.3.2	Type: TrafficInfluSub.....	96
5.4.3.3.3	Type: TrafficInfluSubPatch.....	101
5.4.3.3.4	Type: EventNotification	105
5.4.3.3.5	Type: AfResultInfo.....	106
5.4.3.3.6	Type AfAckInfo	106
5.4.3.4	Simple data types and enumerations	106
5.4.3.4.1	Introduction	106

5.4.3.4.2	Simple data types.....	106
5.4.3.4.3	Enumeration: SubscribedEvent	106
5.4.3.4.4	Enumeration: AfResultStatus	107
5.4.4	Used Features.....	107
5.4.5	Error handling.....	107
5.4.5.1	General	107
5.4.5.2	Protocol Errors	108
5.4.5.3	Application Errors.....	108
5.5	NiddConfigurationTrigger API	108
5.5.1	Resources.....	108
5.5.2	Notifications	108
5.5.2.1	Introduction.....	108
5.5.2.2	Event Notification	108
5.5.2.3	Operation Definition	108
5.5.2.3.1	Notification via HTTP POST	108
5.5.2.3.2	Notification via Websocket	109
5.5.3	Data Model	109
5.5.3.1	General.....	109
5.5.3.2	Reused data types.....	109
5.5.3.3	Structured data types	110
5.5.3.3.1	Introduction	110
5.5.3.3.2	Type: NiddConfigurationTrigger.....	110
5.5.3.3.3	Type: NiddConfigurationTriggerReply	110
5.5.3.4	Simple data types and enumerations	110
5.5.3.4.1	Introduction	110
5.5.3.4.2	Simple data types.....	110
5.5.4	Used Features.....	111
5.5.5	Error handling.....	111
5.5.5.1	General	111
5.5.5.2	Protocol Errors	111
5.5.5.3	Application Errors.....	111
5.6	AnalyticsExposure API	111
5.6.1	Resources.....	111
5.6.1.1	Overview.....	111
5.6.1.2	Resource: Analytics Exposure Subscriptions.....	112
5.6.1.2.1	Introduction	112
5.6.1.2.2	Resource Definition.....	112
5.6.1.2.3	Resource Methods	112
5.6.1.2.3.1	General.....	112
5.6.1.2.3.2	GET.....	113
5.6.1.2.3.3	POST.....	113
5.6.1.3	Resource: Individual Analytics Exposure Subscription	114
5.6.1.3.1	Introduction	114
5.6.1.3.2	Resource Definition.....	114
5.6.1.3.3	Resource Methods	114
5.6.1.3.3.1	General.....	114
5.6.1.3.3.2	GET.....	115
5.6.1.3.3.3	PUT.....	115
5.6.1.3.3.4	DELETE	116
5.6.1A	Custom Operations without associated resources	117
5.6.1A.1	Overview.....	117
5.6.1A.2	Operation: fetch.....	118
5.6.1A.2.1	Description	118
5.6.1A.2.2	Operation Definition.....	118
5.6.2	Notifications	119
5.6.2.1	Introduction.....	119
5.6.2.2	Event Notification	119
5.6.2.3	Operation Definition	119
5.6.2.3.1	Notification via HTTP POST	119
5.6.2.3.2	Notification via Websocket	120
5.6.3	Data Model	120
5.6.3.1	General.....	120

5.6.3.2	Reused data types.....	121
5.6.3.3	Structured data types.....	122
5.6.3.3.1	Introduction.....	122
5.6.3.3.2	Type: AnalyticsExposureSubsc.....	122
5.6.3.3.3	Type: AnalyticsEventNotification.....	124
5.6.3.3.4	Type: AnalyticsEventNotif.....	125
5.6.3.3.5	Type: AnalyticsEventSubsc.....	127
5.6.3.3.6	Type: AnalyticsEventFilterSubsc.....	128
5.6.3.3.7	Type TargetUeId.....	131
5.6.3.3.8	Void.....	132
5.6.3.3.9	Type UeMobilityExposure.....	132
5.6.3.3.10	Type UeLocationInfo.....	132
5.6.3.3.11	Void.....	132
5.6.3.3.12	Type: AnalyticsRequest.....	133
5.6.3.3.13	Type AnalyticsEventFilter.....	134
5.6.3.3.14	Type AnalyticsData.....	137
5.6.3.3.15	Type AbnormalExposure.....	139
5.6.3.3.16	Type CongestInfo.....	139
5.6.3.3.17	Type CongestionAnalytics.....	140
5.6.3.3.18	Type QoSustainabilityExposure.....	140
5.6.3.3.19	Type NetworkPerfExposure.....	141
5.6.3.3.20	Type AnalyticsFailureEventInfo.....	141
5.6.3.4	Simple data types and enumerations.....	141
5.6.3.4.1	Introduction.....	141
5.6.3.4.2	Simple data types.....	141
5.6.3.4.3	Enumeration: AnalyticsEvent.....	141
5.6.3.4.4	Enumeration: AnalyticsFailureCode.....	142
5.6.4	Used Features.....	142
5.6.5	Error handling.....	143
5.6.5.1	General.....	143
5.6.5.2	Protocol Errors.....	143
5.6.5.3	Application Errors.....	143
5.7	5GLANParameterProvision API.....	144
5.7.1	Resources.....	144
5.7.1.1	Overview.....	144
5.7.1.2	Resource: 5GLAN Parameters Provision Subscriptions.....	145
5.7.1.2.1	Introduction.....	145
5.7.1.2.2	Resource Definition.....	145
5.7.1.2.3	Resource Methods.....	145
5.7.1.2.3.1	General.....	145
5.7.1.2.3.2	GET.....	145
5.7.1.2.3.3	POST.....	146
5.7.1.3	Resource: Individual 5GLAN Parameters Provision Subscription.....	147
5.7.1.3.1	Introduction.....	147
5.7.1.3.2	Resource Definition.....	147
5.7.1.3.3	Resource Methods.....	147
5.7.1.3.3.1	General.....	147
5.7.1.3.3.2	GET.....	147
5.7.1.3.3.3	PUT.....	148
5.7.1.3.3.4	DELETE.....	149
5.7.1.3.3.5	PATCH.....	150
5.7.1A	Notifications.....	151
5.7.2	Data Model.....	151
5.7.2.1	General.....	151
5.7.2.2	Reused data types.....	151
5.7.2.3	Structured data types.....	152
5.7.2.3.1	Introduction.....	152
5.7.2.3.2	Type: 5GLanParametersProvision.....	152
5.7.2.3.3	Type: 5GLanParameters.....	152
5.7.2.3.4	Type: AppDescriptor.....	154
5.7.2.3.5	Type: 5GLanParametersProvisionPatch.....	154
5.7.2.3.6	Type: 5GLanParametersPatch.....	154

5.7.2.3.7	Type: AppDescriptorRm	154
5.7.2.3.8	Void	155
5.7.2.4	Simple data types and enumerations	155
5.7.2.4.1	Introduction	155
5.7.2.4.2	Simple data types	155
5.7.2.4.3	Enumeration: AaaUsage	155
5.7.3	Used Features	155
5.7.4	Error handling	155
5.7.4.1	General	155
5.7.4.2	Protocol Errors	155
5.7.4.3	Application Errors	155
5.8	ApplyingBdtPolicy API	156
5.8.1	Resources	156
5.8.1.1	Overview	156
5.8.1.2	Resource: Applied BDT Policy Subscriptions	157
5.8.1.2.1	Introduction	157
5.8.1.2.2	Resource Definition	157
5.8.1.2.3	Resource Methods	157
5.8.1.2.3.1	General	157
5.8.1.2.3.2	GET	157
5.8.1.2.3.3	POST	158
5.8.1.3	Resource: Individual Applied BDT Policy Subscription	159
5.8.1.3.1	Introduction	159
5.8.1.3.2	Resource Definition	159
5.8.1.3.3	Resource Methods	159
5.8.1.3.3.1	General	159
5.8.1.3.3.2	GET	159
5.8.1.3.3.3	PATCH	160
5.8.1.3.3.4	DELETE	161
5.8.2	Notifications	162
5.8.3	Data Model	162
5.8.3.1	General	162
5.8.3.2	Reused data types	162
5.8.3.3	Structured data types	163
5.8.3.3.1	Introduction	163
5.8.3.3.2	Type: AppliedBdtPolicy	163
5.8.3.3.3	Type: AppliedBdtPolicyPatch	163
5.8.3.4	Simple data types and enumerations	164
5.8.3.4.1	Introduction	164
5.8.3.4.2	Simple data types	164
5.8.4	Used Features	164
5.8.5	Error handling	164
5.8.5.1	General	164
5.8.5.2	Protocol Errors	164
5.8.5.3	Application Errors	164
5.9	IPTVConfiguration API	165
5.9.1	Resources	165
5.9.1.1	Overview	165
5.9.1.2	Resource: IPTV Configurations	165
5.9.1.2.1	Introduction	165
5.9.1.2.2	Resource Definition	166
5.9.1.2.3	Resource Methods	166
5.9.1.2.3.1	General	166
5.9.1.2.3.2	GET	166
5.9.1.2.3.3	POST	167
5.9.1.3	Resource: Individual IPTV Configuration	167
5.9.1.3.1	Introduction	167
5.9.1.3.2	Resource Definition	167
5.9.1.3.3	Resource Methods	168
5.9.1.3.3.1	General	168
5.9.1.3.3.2	GET	168
5.9.1.3.3.3	PUT	169

5.9.1.3.3.4	DELETE	169
5.9.1.3.3.5	PATCH	170
5.9.1A	Notifications	171
5.9.2	Data Model	171
5.9.2.1	General	171
5.9.2.2	Reused data types	172
5.9.2.3	Structured data types	172
5.9.2.3.1	Introduction	172
5.9.2.3.2	Type: IptvConfigData	173
5.9.2.3.3	Type: MulticastAccessControl	173
5.9.2.3.4	Type: IptvConfigDataPatch	174
5.9.2.4	Simple data types and enumerations	174
5.9.2.4.1	Introduction	174
5.9.2.4.2	Simple data types	174
5.9.2.4.3	Enumeration: AccessRightStatus	174
5.9.3	Used Features	174
5.9.4	Error handling	174
5.9.4.1	General	174
5.9.4.2	Protocol Errors	175
5.9.4.3	Application Errors	175
5.10	LpiParameterProvision API	175
5.10.1	Resources	175
5.10.1.1	Overview	175
5.10.1.2	Resource: LPI Parameters Provisionings	176
5.10.1.2.1	Introduction	176
5.10.1.2.2	Resource Definition	176
5.10.1.2.3	Resource Methods	176
5.10.1.2.3.1	General	176
5.10.1.2.3.2	GET	176
5.10.1.2.3.3	POST	177
5.10.1.3	Resource: Individual LPI Parameters Provisioning	178
5.10.1.3.1	Introduction	178
5.10.1.3.2	Resource Definition	178
5.10.1.3.3	Resource Methods	178
5.10.1.3.3.1	General	178
5.10.1.3.3.2	GET	178
5.10.1.3.3.3	PUT	179
5.10.1.3.3.3A	PATCH	180
5.10.1.3.3.4	DELETE	181
5.10.2	Data Model	182
5.10.2.1	General	182
5.10.2.2	Reused data types	182
5.10.2.3	Structured data types	182
5.10.2.3.1	Introduction	182
5.10.2.3.2	Type: LpiParametersProvision	183
5.10.2.3.3	Type: LpiParametersProvisionPatch	183
5.10.2.4	Simple data types and enumerations	183
5.10.2.4.1	Introduction	183
5.10.2.4.2	Simple data types	183
5.10.3	Used Features	184
5.10.4	Error handling	184
5.10.4.1	General	184
5.10.4.2	Protocol Errors	184
5.10.4.3	Application Errors	184
5.11	ServiceParameter API	184
5.11.1	Resources	184
5.11.1.1	Overview	184
5.11.1.2	Resource: Service Parameter Subscriptions	185
5.11.1.2.1	Introduction	185
5.11.1.2.2	Resource Definition	185
5.11.1.2.3	Resource Methods	185
5.11.1.2.3.1	General	185

5.11.1.2.3.2	GET.....	186
5.11.1.2.3.3	POST.....	187
5.11.1.3	Resource: Individual Service Parameter Subscription	187
5.11.1.3.1	Introduction	187
5.11.1.3.2	Resource Definition.....	187
5.11.1.3.3	Resource Methods	187
5.11.1.3.3.1	General.....	187
5.11.1.3.3.2	GET.....	188
5.11.1.3.3.3	PUT.....	188
5.11.1.3.3.4	DELETE	189
5.11.1.3.3.5	PATCH	190
5.11.1A	Notifications	191
5.11.1A.1	Introduction.....	191
5.11.1A.2	AF Notifications.....	191
5.11.1A.2.1	Description	191
5.11.1A.2.2	Target URI.....	191
5.11.1A.3	Operation Definition	192
5.11.1A.3.1	Notification via HTTP POST	192
5.11.1A.3.2	Notification via Websocket	193
5.11.2	Data Model	193
5.11.2.1	General	193
5.11.2.2	Reused data types.....	194
5.11.2.3	Structured data types	195
5.11.2.3.1	Introduction	195
5.11.2.3.2	Type: ServiceParameterData	196
5.11.2.3.3	Type: ServiceParameterDataPatch	198
5.11.2.3.4	Type: UrsprRuleRequest.....	199
5.11.2.3.5	Type: RouteSelectionParameterSet	199
5.11.2.3.6	Type: AfNotification	200
5.11.2.3.7	Type: EventInfo.....	200
5.11.2.3.8	Type: TrafficDescriptorComponents.....	201
5.11.2.4	Simple data types and enumerations	201
5.11.2.4.1	Introduction	201
5.11.2.4.2	Simple data types.....	201
5.11.2.4.3	Enumeration: Event	202
5.11.2.4.4	Enumeration: AuthorizationResult	202
5.11.2.4.5	Enumeration: Failure	203
5.11.2.4.6	Enumeration: ConnectionCapabilities	203
5.11.3	Used Features.....	203
5.11.4	Error handling	204
5.11.4.1	General	204
5.11.4.2	Protocol Errors	204
5.11.4.3	Application Errors.....	204
5.12	ACSPParameterProvision API	204
5.12.1	Resources.....	204
5.12.1.1	Overview.....	204
5.12.1.2	Resource: ACS Configuration Subscriptions	205
5.12.1.2.1	Introduction	205
5.12.1.2.2	Resource Definition.....	205
5.12.1.2.3	Resource Methods	205
5.12.1.2.3.1	General.....	205
5.12.1.2.3.2	GET.....	205
5.12.1.2.3.3	POST.....	206
5.12.1.3	Resource: Individual ACS Configuration Subscription	207
5.12.1.3.1	Introduction	207
5.12.1.3.2	Resource Definition.....	207
5.12.1.3.3	Resource Methods	207
5.12.1.3.3.1	General.....	207
5.12.1.3.3.2	GET.....	207
5.12.1.3.3.3	PUT.....	208
5.12.1.3.3.3A	PATCH	209
5.12.1.3.3.4	DELETE	210

5.12.2	Data Model	211
5.12.2.1	General	211
5.12.2.2	Reused data types	211
5.12.2.3	Structured data types	211
5.12.2.3.1	Introduction	211
5.12.2.3.2	Type: AcsConfigurationData	212
5.12.2.3.3	Type: AcsConfigurationDataPatch	212
5.12.2.4	Simple data types and enumerations	212
5.12.2.4.1	Introduction	212
5.12.2.4.2	Simple data types	212
5.12.3	Used Features	213
5.12.4	Error handling	213
5.12.4.1	General	213
5.12.4.2	Protocol Errors	213
5.12.4.3	Application Errors	213
5.13	MoLcsNotify API	213
5.13.1	Resources	213
5.13.2	Notifications	213
5.13.2.1	Introduction	213
5.13.2.2	Event Notification	213
5.13.2.3	Operation Definition	214
5.13.2.3.1	Notification via HTTP POST	214
5.13.3	Data Model	214
5.13.3.1	General	214
5.13.3.2	Reused data types	215
5.13.3.3	Structured data types	215
5.13.3.3.1	Introduction	215
5.13.3.3.2	Type: LocUpdateData	215
5.13.3.3.3	Type: LocUpdateDataReply	215
5.13.3.4	Simple data types and enumerations	215
5.13.3.4.1	Introduction	215
5.13.3.4.2	Simple data types	216
5.13.4	Used Features	216
5.13.5	Error handling	216
5.13.5.1	General	216
5.13.5.2	Protocol Errors	216
5.13.5.3	Application Errors	216
5.14	AKMA API	216
5.14.1	Introduction	216
5.14.2	Resources	217
5.14.3	Custom Operations without associated resources	217
5.14.3.1	Overview	217
5.14.3.2	Operation: Retrieve	217
5.14.3.2.1	Description	217
5.14.3.2.2	Operation Definition	217
5.14.4	Notifications	218
5.14.5	Data Model	218
5.14.5.1	General	218
5.14.5.2	Reused data types	218
5.14.5.3	Structured data types	219
5.14.5.3.1	Introduction	219
5.14.5.3.2	Type: AkmaAfKeyRequest	219
5.14.5.3.3	Type: AkmaAfKeyData	219
5.14.5.4	Simple data types and enumerations	219
5.14.5.4.1	Introduction	219
5.14.5.4.2	Simple data types	219
5.14.6	Used Features	220
5.14.7	Error handling	220
5.14.7.1	General	220
5.14.7.2	Protocol Errors	220
5.14.7.3	Application Errors	220
5.15	TimeSyncExposure API	221

5.15.1	Resources.....	221
5.15.1.1	Overview.....	221
5.15.1.2	Resource: Time Synchronization Exposure Subscriptions.....	222
5.15.1.2.1	Introduction.....	222
5.15.1.2.2	Resource Definition.....	222
5.15.1.2.3	Resource Methods.....	222
5.15.1.2.3.1	General.....	222
5.15.1.2.3.2	GET.....	222
5.15.1.2.3.3	POST.....	223
5.15.1.3	Resource: Individual Time Synchronization Exposure Subscription.....	224
5.15.1.3.1	Introduction.....	224
5.15.1.3.2	Resource Definition.....	224
5.15.1.3.3	Resource Methods.....	224
5.15.1.3.3.1	General.....	224
5.15.1.3.3.2	GET.....	224
5.15.1.3.3.3	PUT.....	225
5.15.1.3.3.4	DELETE.....	226
5.15.1.4	Resource: Time Synchronization Exposure Configurations.....	227
5.15.1.4.1	Introduction.....	227
5.15.1.4.2	Resource Definition.....	227
5.15.1.4.3	Resource Methods.....	227
5.15.1.4.3.1	General.....	227
5.15.1.4.3.2	GET.....	228
5.15.1.4.3.3	POST.....	228
5.15.1.5	Resource: Individual Time Synchronization Exposure Configuration.....	229
5.15.1.5.1	Introduction.....	229
5.15.1.5.2	Resource Definition.....	229
5.15.1.5.3	Resource Methods.....	229
5.15.1.5.3.1	General.....	229
5.15.1.5.3.2	GET.....	229
5.15.1.5.3.3	PUT.....	230
5.15.1.5.3.4	DELETE.....	231
5.15.2	Custom Operations without associated resources.....	232
5.15.3	Notifications.....	232
5.15.3.1	Introduction.....	232
5.15.3.2	Time Synchronization Capability Notification.....	232
5.15.3.2.1	Description.....	232
5.15.3.2.2	Callback URI.....	232
5.15.3.2.3	Operation Definition.....	233
5.15.3.2.3.1	Notification via HTTP POST.....	233
5.15.3.2.3.2	Notification via WebSocket.....	233
5.15.3.3	Time Synchronization Configuration Notification.....	234
5.15.3.3.1	Description.....	234
5.15.3.3.2	Callback URI.....	234
5.15.3.3.3	Operation Definition.....	234
5.15.3.3.3.1	Notification via HTTP POST.....	234
5.15.3.3.3.2	Notification via WebSocket.....	235
5.15.4	Data Model.....	235
5.15.4.1	General.....	235
5.15.4.2	Reused data types.....	235
5.15.4.3	Structured data types.....	236
5.15.4.3.1	Introduction.....	236
5.15.4.3.2	Type: TimeSyncExposureSubsc.....	237
5.15.4.3.3	Type: TimeSyncCapability.....	239
5.15.4.3.4	Void.....	240
5.15.4.3.5	Void.....	240
5.15.4.3.6	Type: TimeSyncExposureConfig.....	240
5.15.4.3.7	Type: TimeSyncExposureSubsNotif.....	240
5.15.4.3.8	Type: SubsEventNotification.....	241
5.15.4.3.9	Type: TimeSyncExposureConfigNotif.....	241
5.15.4.3.10	Type: EventFilter.....	241
5.15.4.3.11	Type: PtpCapabilitiesPerUe.....	241

5.15.4.3.12	Type: PtpInstance	241
5.15.4.3.13	Void	242
5.15.4.3.14	Void	242
5.15.4.3.15	Void	242
5.15.4.3.16	Void	242
5.15.4.3.17	Type: StateOfConfiguration	242
5.15.4.3.18	Type: ConfigForPort	243
5.15.4.3.19	Type: StateOfDstt	245
5.15.4.4	Simple data types and enumerations	245
5.15.4.4.1	Introduction	245
5.15.4.4.2	Simple data types	245
5.15.4.4.3	Void	246
5.15.4.4.4	Enumeration: Protocol	246
5.15.4.4.5	Enumeration: GmCapable	246
5.15.4.4.6	Enumeration: SubscribedEvent	246
5.15.4.4.7	Enumeration: InstanceType	246
5.15.4.4.8	Enumeration: AsTimeResource	246
5.15.5	Used Features	247
5.15.6	Error handling	247
5.15.6.1	General	247
5.15.6.2	Protocol Errors	247
5.15.6.3	Application Errors	247
5.16	EcsAddressProvision API	248
5.16.1	Resources	248
5.16.1.1	Overview	248
5.16.1.2	Resource: ECS Address Provision Configurations	248
5.16.1.2.1	Introduction	248
5.16.1.2.2	Resource Definition	249
5.16.1.2.3	Resource Methods	249
5.16.1.2.3.1	General	249
5.16.1.2.3.2	GET	249
5.16.1.2.3.3	POST	250
5.16.1.3	Resource: Individual ECS Address Provision Configuration	250
5.16.1.3.1	Introduction	250
5.16.1.3.2	Resource Definition	250
5.16.1.3.3	Resource Methods	251
5.16.1.3.3.1	General	251
5.16.1.3.3.2	GET	251
5.16.1.3.3.3	PUT	252
5.16.1.3.3.4	DELETE	252
5.16.1A	Notifications	253
5.16.2	Data Model	253
5.16.2.1	General	253
5.16.2.2	Reused data types	254
5.16.2.3	Structured data types	254
5.16.2.3.1	Introduction	254
5.16.2.3.2	Type: EcsAddressProvision	254
5.16.2.4	Simple data types and enumerations	254
5.16.2.4.1	Introduction	254
5.16.2.4.2	Simple data types	254
5.16.3	Used Features	255
5.16.4	Error handling	255
5.16.4.1	General	255
5.16.4.2	Protocol Errors	255
5.16.4.3	Application Errors	255
5.17	AMPolicyAuthorization API	255
5.17.1.1	Overview	255
5.17.1.2	Resource: Application AM Contexts	257
5.17.1.2.1	Introduction	257
5.17.1.2.2	Resource Definition	257
5.17.1.2.3	Resource Methods	257
5.17.1.2.3.1	General	257

5.17.1.2.3.2	POST.....	257
5.17.1.3	Resource: Individual Application AM Context.....	258
5.17.1.3.1	Introduction	258
5.17.1.3.2	Resource Definition.....	258
5.17.1.3.3	Resource Methods	258
5.17.1.3.3.1	General.....	258
5.17.1.3.3.2	GET.....	258
5.17.1.3.3.3	PATCH	259
5.17.1.3.3.4	DELETE	260
5.17.1.4	Resource: AM Policy Events Subscription	261
5.17.1.4.1	Introduction	261
5.17.1.4.2	Resource Definition.....	261
5.17.1.4.3	Resource Methods	262
5.17.1.4.3.1	General.....	262
5.17.1.4.3.2	PUT.....	262
5.17.1.4.3.3	DELETE	264
5.17.2	Notifications	265
5.17.2.1	Introduction.....	265
5.17.2.2	AM Event Notification.....	265
5.17.2.2.1	Description	265
5.17.2.2.2	Callback URI.....	265
5.17.2.2.3	Operation Definition.....	265
5.17.2.2.3.1	Notification via HTTP POST.....	265
5.17.2.2.3.2	Notification via Websocket.....	266
5.17.3	Data Model	266
5.17.3.1	General	266
5.17.3.2	Reused data types.....	267
5.17.3.3	Structured data types	267
5.17.3.3.1	Introduction	267
5.17.3.3.2	Type: AppAmContextExpData	268
5.17.3.3.3	Type: AppAmContextExpUpdateData.....	269
5.17.3.3.4	Type: GeographicalArea.....	269
5.17.3.4	Simple data types and enumerations	269
5.17.3.4.1	Introduction	269
5.17.3.4.2	Simple data types.....	269
5.17.3.5	Data types describing alternative data types or combinations of data types	270
5.17.3.5.1	Type: AppAmContextExpRespData	270
5.17.4	Used Features.....	270
5.17.5	Error handling.....	270
5.17.5.1	General	270
5.17.5.2	Protocol Errors	270
5.17.5.3	Application Errors.....	270
5.18	AMInfluence API.....	271
5.18.1	Resources.....	271
5.18.1.1	Overview.....	271
5.18.1.2	Resource: AM Influence Subscription	272
5.18.1.2.1	Introduction	272
5.18.1.2.2	Resource Definition.....	272
5.18.1.2.3	Resource Methods	272
5.18.1.2.3.1	General.....	272
5.18.1.2.3.2	GET.....	272
5.18.1.2.3.3	POST.....	273
5.18.1.3	Resource: Individual AM Influence Subscription	274
5.18.1.3.1	Introduction	274
5.18.1.3.2	Resource Definition.....	274
5.18.1.3.3	Resource Methods	274
5.18.1.3.3.1	General.....	274
5.18.1.3.3.2	GET.....	274
5.18.1.3.3.3	PUT.....	275
5.18.1.3.3.4	PATCH	276
5.18.1.3.3.5	DELETE	277
5.18.2	Notifications	278

5.18.2.1	Introduction	278
5.18.2.2	Event Notification	278
5.18.2.2.1	Description	278
5.18.2.2.2	Target URI	278
5.18.2.2.3	Operation Definition	278
5.18.3	Data Model	279
5.18.3.1	General	279
5.18.3.2	Reused data types	280
5.18.3.3	Structured data types	280
5.18.3.3.1	Introduction	280
5.18.3.3.2	Type: AmInfluSub	280
5.18.3.3.3	Type: AmInfluSubPatch	283
5.18.3.3.4	Type: AmInfluEventNotif	283
5.18.3.3.5	Type: DnnSnssaiInformation	284
5.18.3.4	Simple data types and enumerations	284
5.18.3.4.1	Introduction	284
5.18.3.4.2	Simple data types	284
5.18.3.4.3	Enumeration: AmInfluEvent	284
5.18.4	Used Features	284
5.18.5	Error handling	285
5.18.5.1	General	285
5.18.5.2	Protocol Errors	285
5.18.5.3	Application Errors	285
5.19	MBSTMGI API	285
5.19.1	Introduction	285
5.19.2	Resources	285
5.19.3	Custom Operations without associated resources	285
5.19.3.1	Overview	285
5.19.3.2	Operation: Allocate	286
5.19.3.2.1	Description	286
5.19.3.2.2	Operation Definition	286
5.19.3.3	Operation: Deallocate	287
5.19.3.3.1	Description	287
5.19.3.3.2	Operation Definition	287
5.19.4	Notifications	288
5.19.4.1	General	288
5.19.4.2	Notification of Allocated MBS TMGI(s) Timer Expiry	288
5.19.4.2.1	Description	288
5.19.4.2.2	Target URI	288
5.19.4.2.3	Operation Definition	289
5.19.4.2.3.1	Notification via HTTP POST	289
5.19.4.2.3.2	Notification via WebSocket	289
5.19.5	Data Model	290
5.19.5.1	General	290
5.19.5.2	Structured data types	290
5.19.5.2.1	Introduction	290
5.19.5.2.2	Type: TmgiAllocRequest	291
5.19.5.2.3	Type: TmgiAllocResponse	292
5.19.5.2.4	Type: TmgiDeallocRequest	292
5.19.5.2.5	Type: ExpiryNotif	292
5.19.5.2.6	Type: ReducedMbsServArea	293
5.19.5.3	Simple data types and enumerations	293
5.19.5.3.1	Introduction	293
5.19.5.3.2	Simple data types	293
5.19.5.4	Data types describing alternative data types or combinations of data types	294
5.19.5.4.1	Type: ProblemDetailsTmgiAlloc	294
5.19.6	Used Features	294
5.19.7	Error handling	294
5.19.7.1	General	294
5.19.7.2	Protocol Errors	294
5.19.7.3	Application Errors	294
5.20	MBSSession API	294

5.20.1	Introduction.....	294
5.20.2	Resources.....	295
5.20.2.1	Overview.....	295
5.20.2.2	Resource: MBS sessions	296
5.20.2.2.1	Introduction	296
5.20.2.2.2	Resource Definition.....	296
5.20.2.2.3	Resource Methods	297
5.20.2.2.3.1	POST.....	297
5.20.2.2.4	Resource Custom Operations	297
5.20.2.3	Resource: Individual MBS Session.....	297
5.20.2.3.1	Introduction	297
5.20.2.3.2	Resource Definition.....	297
5.20.2.3.3	Resource Standard Methods	298
5.20.2.3.3.1	PATCH	298
5.20.2.3.3.3	DELETE	299
5.20.2.3.4	Resource Custom Operations	300
5.20.2.4	Resource: MBS Session Subscriptions	300
5.20.2.4.1	Introduction	300
5.20.2.4.2	Resource Definition.....	300
5.20.2.4.3	Resource Methods	300
5.20.2.4.3.1	GET.....	300
5.20.2.4.3.2	POST.....	301
5.20.2.4.4	Resource Custom Operations	302
5.20.2.5	Resource: Individual MBS Session Subscription.....	302
5.20.2.5.1	Introduction	302
5.20.2.5.2	Resource Definition.....	302
5.20.2.5.3	Resource Methods	302
5.20.2.5.3.1	GET.....	302
5.20.2.5.3.2	DELETE	303
5.20.2.5.4	Resource Custom Operations	304
5.20.2.6	Resource: MBS Parameters Provisionings.....	304
5.20.2.6.1	Introduction	304
5.20.2.6.2	Resource Definition.....	304
5.20.2.6.3	Resource Methods	305
5.20.2.6.3.1	GET.....	305
5.20.2.6.3.2	POST.....	306
5.20.2.6.4	Resource Custom Operations	306
5.20.2.7	Resource: Individual MBS Parameters Provisioning	306
5.20.2.7.1	Introduction	306
5.20.2.7.2	Resource Definition.....	307
5.20.2.7.3	Resource Methods	307
5.20.2.7.3.1	GET.....	307
5.20.2.7.3.2	PUT.....	308
5.20.2.7.3.3	PATCH	309
5.20.2.7.3.4	DELETE	310
5.20.2.7.4	Resource Custom Operations	311
5.20.3	Custom Operations without associated resources	311
5.20.4	Notifications	311
5.20.4.1	General	311
5.20.4.2	MBS Session Status Notification	311
5.20.4.2.1	Description	311
5.20.4.2.2	Target URI.....	311
5.20.4.2.3	Operation Definition.....	312
5.20.4.2.3.1	Notification via HTTP POST.....	312
5.20.4.2.3.2	Notification via WebSocket.....	312
5.20.5	Data Model	312
5.20.5.1	General	312
5.20.5.2	Structured data types	313
5.20.5.2.1	Introduction	313
5.20.5.2.2	Type: MbsSessionCreateReq.....	314
5.20.5.2.3	Type: MbsSessionCreateRsp.....	314
5.20.5.2.4	Type: MbsSessionSubsc	314

5.20.5.2.5	Type: MbsSessionStatusNotif	314
5.20.5.2.6	Type: MbsPpData.....	315
5.20.5.2.7	Type: MbsSessAuthData	315
5.20.5.2.8	Type: MbsPpDataPatch.....	315
5.20.5.2.9	Type: MbsSessionUpdateResp	316
5.20.5.3	Simple data types and enumerations	316
5.20.5.3.1	Introduction	316
5.20.5.3.2	Simple data types.....	316
5.20.6	Used Features.....	316
5.20.7	Error handling.....	317
5.20.7.1	General	317
5.20.7.2	Protocol Errors	317
5.20.7.3	Application Errors.....	317
5.21	EASDeployment API	317
5.21.1	Resources.....	317
5.21.1.1	Overview.....	317
5.21.1.2	Resource: EAS Deployment Information.....	318
5.21.1.2.1	Introduction	318
5.21.1.2.2	Resource Definition.....	318
5.21.1.2.3	Resource Methods	319
5.21.1.2.3.1	General.....	319
5.21.1.2.3.2	GET.....	319
5.21.1.2.3.3	POST.....	320
5.21.1.3	Resource: Individual EAS Deployment Information	320
5.21.1.3.1	Introduction	320
5.21.1.3.2	Resource Definition.....	320
5.21.1.3.3	Resource Methods	321
5.21.1.3.3.1	General.....	321
5.21.1.3.3.2	GET.....	321
5.21.1.3.3.3	PUT.....	322
5.21.1.3.3.4	DELETE	323
5.21.2	Custom Operations without associated resources	324
5.21.2.1	Overview.....	324
5.21.2.2	Operation: remove-edis	324
5.21.2.2.1	Description	324
5.21.2.2.2	Operation Definition.....	324
5.21.3	Notifications	325
5.21.4	Data Model	325
5.21.4.1	General	325
5.21.4.2	Reused data types.....	325
5.21.4.3	Structured data types	325
5.21.4.3.1	Introduction	325
5.21.4.3.2	Type: EasDeployInfo.....	326
5.21.4.3.3	Type: DnaiInformation.....	326
5.21.4.3.4	Type: DnsServerIdentifier	326
5.21.4.3.5	Type: EdiDeleteCriteria.....	327
5.21.4.4	Simple data types and enumerations	327
5.21.4.4.1	Introduction	327
5.21.4.4.2	Simple data types.....	327
5.21.5	Used Features.....	327
5.21.6	Error handling.....	327
5.21.6.1	General	327
5.21.6.2	Protocol Errors	327
5.21.6.3	Application Errors.....	327
5.22	ASTI API.....	328
5.22.1	Resources.....	328
5.22.1.1	Overview.....	328
5.22.1.2	Resource: ASTI Configurations	329
5.22.1.2.1	Introduction	329
5.22.1.2.2	Resource Definition.....	329
5.22.1.2.3	Resource Methods	329
5.22.1.2.3.1	General.....	329

5.22.1.2.3.2	GET.....	329
5.22.1.2.3.3	POST.....	330
5.22.1.2.4	Resource Custom Operations	331
5.22.1.2.4.1	Overview.....	331
5.22.1.2.4.2	Operation: retrieve	331
5.22.1.2.4.2.1	Description	331
5.22.1.2.4.2.2	Operation Definition	331
5.22.1.3	Resource: Individual ASTI Configuration	332
5.22.1.3.1	Introduction	332
5.22.1.3.2	Resource Definition.....	332
5.22.1.3.3	Resource Methods	332
5.22.1.3.3.1	General.....	332
5.22.1.3.3.2	GET.....	332
5.22.1.3.3.3	PUT.....	333
5.22.1.3.3.4	DELETE	334
5.22.2	Custom Operations without associated resources	335
5.22.3	Notifications	335
5.22.4	Data Model	335
5.22.4.1	General	335
5.22.4.2	Reused data types.....	335
5.22.4.3	Structured data types	336
5.22.4.3.1	Introduction	336
5.22.4.3.2	Type: AccessTimeDistributionData	336
5.22.4.3.3	Type: StatusRequestData.....	336
5.22.4.3.4	Type: StatusResponseData	336
5.22.4.3.5	Type: ActiveUe	337
5.22.4.4	Simple data types and enumerations	337
5.22.4.4.1	Introduction	337
5.22.4.4.2	Simple data types.....	337
5.22.5	Used Features.....	337
5.22.6	Error handling.....	337
5.22.6.1	General	337
5.22.6.2	Protocol Errors	337
5.22.6.3	Application Errors.....	337
5.23	DataReporting API.....	338
5.23.1	Introduction.....	338
5.23.2	Resources.....	338
5.23.2.2	Resource: Data Reporting Sessions.....	339
5.23.2.2.1	Introduction	339
5.23.2.2.2	Resource definition.....	339
5.23.2.2.3	Resource Methods	339
5.23.2.2.3.1	POST.....	339
5.23.2.3	Resource: Individual Data Reporting Session.....	340
5.23.2.3.1	Introduction	340
5.23.2.3.2	Resource Definition.....	340
5.23.2.3.3	Resource standard methods	340
5.23.2.3.3.1	GET.....	340
5.23.2.3.3.2	PUT.....	341
5.23.2.3.3.3	DELETE	342
5.23.2.3.4	Resource custom operations	343
5.23.3	Custom Operations without associated resources	344
5.23.4	Notifications	344
5.23.5	Data Model	344
5.23.3.1	General	344
5.23.6	Used Features.....	345
5.23.7	Error handling.....	345
5.23.7.1	General	345
5.23.7.2	Protocol Errors	345
5.23.7.3	Application Errors.....	345
5.24	DataReportingProvisioning API.....	345
5.24.1	Introduction.....	345
5.24.2	Resources.....	346

5.24.2.2	Resource: Data Reporting Provisioning Sessions	347
5.24.2.2.1	Introduction	347
5.24.2.2.2	Resource definition.....	347
5.24.2.2.3	Resource Methods	348
5.24.2.2.3.1	POST.....	348
5.24.2.3	Resource: Individual Data Reporting Provisioning Session.....	348
5.24.2.3.1	Introduction	348
5.24.2.3.2	Resource Definition.....	349
5.24.2.3.3	Resource standard methods	349
5.24.2.3.3.2	Void	350
5.24.2.3.3.3	DELETE	350
5.24.2.4	Resource: Data Reporting Configurations	351
5.24.2.4.1	Introduction	351
5.24.2.4.2	Resource definition.....	351
5.24.2.4.3	Resource Methods	351
5.24.2.4.3.1	POST.....	351
5.24.2.5	Resource: Individual Data Reporting Configuration.....	352
5.24.2.5.1	Introduction	352
5.24.2.5.2	Resource Definition.....	353
5.24.2.5.3	Resource standard methods	353
5.24.2.5.3.2	GET.....	353
5.24.2.5.3.3	PUT.....	354
5.24.2.5.3.3A	PATCH	355
5.24.2.5.3.4	DELETE	356
5.24.3	Custom Operations without associated resources	357
5.24.4	Notifications	357
5.24.5	Data Model	357
5.24.5.1	General	357
5.24.6	Used Features.....	358
5.24.7	Error handling.....	358
5.24.7.1	General	358
5.24.7.2	Protocol Errors.....	358
5.24.7.3	Application Errors.....	358
5.25	UEId API.....	358
5.25.1	Introduction.....	358
5.25.2	Resources.....	359
5.25.3	Custom Operations without associated resources	359
5.25.3.1	Overview.....	359
5.25.3.2	Operation: Retrieve	359
5.25.3.2.1	Description	359
5.25.3.2.2	Operation Definition.....	359
5.25.4	Notifications	360
5.25.5	Data Model	360
5.25.5.1	General	360
5.25.5.2	Structured data types	361
5.25.5.2.1	Introduction	361
5.25.5.2.2	Type: UeIdReq	361
5.25.5.2.3	Type: UeIdInfo	361
5.25.5.3	Simple data types and enumerations	362
5.25.5.3.1	Introduction	362
5.25.5.3.2	Simple data types.....	362
5.25.6	Used Features.....	362
5.25.7	Error handling.....	362
5.25.7.1	General	362
5.25.7.2	Protocol Errors.....	362
5.25.7.3	Application Errors.....	362
5.26	MBSUserService API.....	363
5.26.1	Introduction.....	363
5.26.2	Resources.....	363
5.26.2.1	Overview.....	363
5.26.2.2	Resource: MBS User Services	364
5.26.2.2.1	Introduction	364

5.26.2.2.2	Resource Definition	364
5.26.2.2.3	Resource Standard Methods	364
5.26.2.2.3.1	GET	364
5.26.2.2.3.2	POST	365
5.26.2.2.4	Resource Custom Operations	366
5.26.2.3	Resource: Individual MBS User Service	366
5.26.2.3.1	Introduction	366
5.26.2.3.2	Resource Definition	366
5.26.2.3.3	Resource Standard Methods	366
5.26.2.3.3.1	GET	366
5.26.2.3.3.2	PUT	367
5.26.2.3.3.3	PATCH	368
5.26.2.3.3.4	DELETE	369
5.26.2.3.4	Resource Custom Operations	370
5.26.3	Custom Operations without associated resources	370
5.26.4	Notifications	370
5.26.5	Data Model	370
5.26.5.1	General	370
5.26.5.2	Structured data types	371
5.26.5.2.1	Introduction	371
5.26.5.3	Simple data types and enumerations	371
5.26.5.3.1	Introduction	371
5.26.5.3.2	Simple data types	371
5.26.6	Used Features	371
5.26.7	Error handling	372
5.26.7.1	General	372
5.26.7.2	Protocol Errors	372
5.26.7.3	Application Errors	372
5.27	MBSUserDataIngestSession API	372
5.27.1	Introduction	372
5.27.2	Resources	372
5.27.2.1	Overview	372
5.27.2.2	Resource: MBS User Data Ingest Sessions	374
5.27.2.2.1	Introduction	374
5.27.2.2.2	Resource Definition	374
5.27.2.2.3	Resource Standard Methods	374
5.27.2.2.3.1	GET	374
5.27.2.2.3.2	POST	375
5.27.2.2.4	Resource Custom Operations	376
5.27.2.3	Resource: Individual MBS User Data Ingest Session	376
5.27.2.3.1	Introduction	376
5.27.2.3.2	Resource Definition	376
5.27.2.3.3	Resource Standard Methods	376
5.27.2.3.3.1	GET	376
5.27.2.3.3.2	PUT	377
5.27.2.3.3.3	PATCH	378
5.27.2.3.3.4	DELETE	379
5.27.2.3.4	Resource Custom Operations	380
5.27.2.4	Resource: MBS User Data Ingest Session Status Subscriptions	380
5.27.2.4.1	Introduction	380
5.27.2.4.2	Resource Definition	380
5.27.2.4.3	Resource Standard Methods	381
5.27.2.4.3.1	GET	381
5.27.2.4.3.2	POST	382
5.27.2.4.4	Resource Custom Operations	382
5.27.2.5	Resource: Individual MBS User Data Ingest Session Status Subscription	383
5.27.2.5.1	Introduction	383
5.27.2.5.2	Resource Definition	383
5.27.2.5.3	Resource Standard Methods	383
5.27.2.5.3.1	GET	383
5.27.2.5.3.2	PUT	384
5.27.2.5.3.3	PATCH	385

5.27.2.5.3.4	DELETE	386
5.27.2.5.4	Resource Custom Operations	387
5.27.3	Custom Operations without associated resources	387
5.27.4	Notifications	387
5.27.4.1	General	387
5.27.4.2	MBS User Data Ingest Session Status Change Notification	388
5.27.4.2.1	Description	388
5.27.4.2.2	Target URI.....	388
5.27.4.2.3	Operation Definition.....	388
5.27.4.2.3.1	Notification via HTTP POST.....	388
5.27.4.2.3.2	Notification via WebSocket.....	389
5.27.5	Data Model	389
5.27.5.1	General	389
5.27.5.2	Structured data types	389
5.27.5.2.1	Introduction	389
5.27.5.3	Simple data types and enumerations	389
5.27.5.3.1	Introduction	389
5.27.5.3.2	Simple data types.....	390
5.27.6	Used Features.....	390
5.27.7	Error handling.....	390
5.27.7.1	General	390
5.27.7.2	Protocol Errors	390
5.27.7.3	Application Errors.....	390
5.28	MSEventExposure API	390
5.28.1	Introduction.....	390
5.28.2	Resources.....	391
5.28.2.1	Overview.....	391
5.28.2.2	Resource: Media Streaming Event Exposure Subscriptions	392
5.28.2.2.1	Introduction	392
5.28.2.2.2	Resource Definition.....	392
5.28.2.2.3	Resource Standard Methods	392
5.28.2.2.3.1	GET.....	392
5.28.2.2.3.2	POST.....	393
5.28.2.2.4	Resource Custom Operations	394
5.28.2.3	Resource: Individual Media Streaming Event Exposure Subscription.....	394
5.28.2.3.1	Introduction	394
5.28.2.3.2	Resource Definition.....	394
5.28.2.3.3	Resource Standard Methods	394
5.28.2.3.3.1	GET.....	394
5.28.2.3.3.2	PUT.....	395
5.28.2.3.3.3	DELETE	396
5.28.2.3.4	Resource Custom Operations	397
5.28.3	Custom Operations without associated resources	397
5.28.4	Notifications	397
5.28.4.1	General	397
5.28.4.2	Media Streaming Event Exposure Notification.....	398
5.28.4.2.1	Description	398
5.28.4.2.2	Target URI.....	398
5.28.4.2.3	Operation Definition.....	398
5.28.4.2.3.1	Notification via HTTP POST.....	398
5.28.4.2.3.2	Notification via WebSocket.....	399
5.28.5	Data Model	399
5.28.5.1	General	399
5.28.5.2	Structured data types	400
5.28.5.2.1	Introduction	400
5.28.5.3	Simple data types and enumerations	400
5.28.5.3.1	Introduction	400
5.28.5.3.2	Simple data types.....	400
5.28.6	Used Features.....	400
5.28.7	Error handling.....	400
5.28.7.1	General	400
5.28.7.2	Protocol Errors	400

5.28.7.3	Application Errors.....	401
6	Security.....	401
7	Using Common API Framework.....	401
7.1	General.....	401
7.2	Security.....	401
Annex A (normative): OpenAPI representation for NEF Northbound APIs.....		403
A.1	General.....	403
A.2	TrafficInfluence API.....	403
A.3	NiddConfigurationTrigger API.....	412
A.4	AnalyticsExposure API.....	413
A.5	5GLANParameterProvision API.....	427
A.6	ApplyingBdtPolicy API.....	433
A.7	IPTVConfiguration API.....	437
A.8	LpiParameterProvision API.....	442
A.9	ServiceParameter API.....	447
A.10	ACSPParameterProvision API.....	457
A.11	MoLcsNotify API.....	462
A.12	AKMA API.....	463
A.13	TimeSyncExposure API.....	465
A.14	EcsAddressProvision API.....	478
A.15	AMPolicyAuthorization API.....	482
A.16	AMInfluence API.....	489
A.17	MBSTMGI API.....	495
A.18	MBSSESession API.....	498
A.19	EASDeployment API.....	509
A.20	ASTI API.....	514
A.21	DataReporting API.....	519
A.22	DataReportingProvisioning API.....	523
A.23	UEId API.....	528
A.24	MBSUserService API.....	530
A.25	MBSUserDataIngestSession API.....	534
A.26	MSEventExposure API.....	542
Annex B (informative): Change history.....		548
	History.....	560

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present specification describes the protocol for the NEF Northbound interface between the NEF and the AF. The NEF Northbound interface and the related stage 2 functional requirements are defined in 3GPP TS 23.502 [2], 3GPP TS 23.316 [28], 3GPP TS 23.288 [29] and 3GPP TS 23.548 [42].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.502: "Procedures for the 5G system".
- [3] 3GPP TS 23.501: "System Architecture for the 5G".
- [4] 3GPP TS 29.122: "T8 reference point for northbound Application Programming Interfaces (APIs)".
- [5] OpenAPI: "OpenAPI Specification Version 3.0.0", <https://spec.openapis.org/oas/v3.0.0>.
- [6] 3GPP TS 33.501: "Security architecture and procedures for 5G System".
- [7] 3GPP TS 29.514: "5G System; Policy Authorization Service; Stage 3".
- [8] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".
- [9] 3GPP TS 29.521: "5G System; Binding Support Management Service; Stage 3".
- [10] Void.
- [11] 3GPP TS 23.222: "Common API Framework for 3GPP Northbound APIs; Stage 2".
- [12] 3GPP TS 29.222: "Common API Framework for 3GPP Northbound APIs; Stage 3".
- [13] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [14] 3GPP TS 33.122: "Security Aspects of Common API Framework for 3GPP Northbound APIs".
- [15] Void.
- [16] Void
- [17] 3GPP TS 29.503: "5G System; Unified Data Management Services; Stage 3".
- [18] 3GPP TS 29.518: "5G System; Access and Mobility Management Services; Stage 3".
- [19] 3GPP TS 29.554: "5G System; Background Data Transfer Policy Control Service; Stage 3".
- [20] 3GPP TS 29.504: "5G System; Unified Data Repository Services; Stage 3".
- [21] 3GPP TR 21.900: "Technical Specification Group working methods".
- [22] 3GPP TS 29.523: "5G System; Policy Control Event Exposure Service; Stage 3".

- [23] 3GPP TS 29.519: "5G System; Usage of the Unified Data Repository service for Policy Control Data, Application Data and Structured Data for Exposure; Stage 3".
- [24] 3GPP TS 29.541: "5G System; Network Exposure (NE) function services for Non-IP Data Delivery (NIDD); Stage 3".
- [25] 3GPP TS 29.542: "5G System, Session management services for Non-IP Data Delivery (NIDD); Stage 3".
- [26] 3GPP TS 29.508: "5G System; Session Management Event Exposure Service; Stage 3".
- [27] 3GPP TS 29.520: "5G System; Network Data Analytics Services; Stage 3".
- [28] 3GPP TS 23.316: "Wireless and wireline convergence access support for the 5G system (5GS)".
- [29] 3GPP TS 23.288: "Architecture enhancements for 5G System (5GS) to support network data analytics services".
- [30] 3GPP TS 23.032: "Universal Geographical Area Description (GAD)".
- [31] Void
- [32] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [33] 3GPP TS 24.588: "Vehicle-to-Everything (V2X) services in 5G System (5GS); User Equipment (UE) policies; Stage 3".
- [34] 3GPP TS 29.572: "5G System; Location Management Services; Stage 3".
- [35] 3GPP TS 29.515: "5G System; Gateway Mobile Location Services; Stage 3".
- [36] 3GPP TS 23.273: "5G System Location Services (LCS)".
- [37] 3GPP TS 33.535: "Authentication and Key Management for Applications (AKMA) based on 3GPP credentials in the 5G System (5GS)".
- [38] 3GPP TS 29.535: "5G System; AKMA Anchor Services; Stage 3".
- [39] 3GPP TS 33.220: "Generic Authentication Architecture (GAA); Generic Bootstrapping Architecture (GBA)".
- [40] IETF RFC 7542: "The Network Access Identifier".
- [41] 3GPP TS 29.512: "5G System; Session Management Policy Control Service; Stage 3".
- [42] 3GPP TS 23.548: "5G System Enhancements for Edge Computing; Stage 2".
- [43] 3GPP TS 29.534: "5G System; Access and Mobility Policy Authorization Service; Stage 3".
- [44] IETF RFC 3986: "Uniform Resource Identifier (URI): Generic Syntax".
- [45] IEEE Std 1588-2019: "IEEE Standard for a Precision Clock Synchronization Protocol for Networked Measurement and Control".
- [46] IEEE Std 802.1AS-2020: "IEEE Standard for Local and metropolitan area networks--Timing and Synchronization for Time-Sensitive Applications".
- [47] 3GPP TS 29.536: "5G System; Network Slice Admission Control Services; Stage 3".
- [48] 3GPP TS 24.526: "User Equipment (UE) policies for 5G System (5GS); Stage 3".
- [49] 3GPP TS 24.555: "Proximity based services (ProSe) in 5G system (5GS); User Equipment (UE) policies; Stage 3".
- [50] 3GPP TS 29.565: "5G System; Time Sensitive Communication and Time Synchronization Function Services; Stage 3".
- [51] IEEE 802.1Q: "Virtual Bridged Local Area Networks".

- [52] 3GPP TS 29.532: "5G System; 5G Multicast-Broadcast Session Management Services; Stage 3".
- [53] 3GPP TS 23.247: "Architectural enhancements for 5G multicast-broadcast services; Stage 2".
- [54] IETF RFC 6733: "Diameter Base Protocol".
- [55] 3GPP TS 23.003: "Numbering, addressing and identification".
- [56] 3GPP TS 33.558: "Security aspects of enhancement of support for enabling edge applications; Stage 2".
- [57] 3GPP TS 29.510: "Network Function Repository Services; Stage 3".
- [58] 3GPP TS 29.517: "5G System; Application Function (AF) event exposure service".
- [59] 3GPP TS 26.531: "Data Collection and Reporting; General Description and Architecture".
- [60] 3GPP TS 26.532: "Data Collection and Reporting; Protocols and Formats".
- [61] 3GPP TS 29.564: "5G System; User Plane Function Services; Stage 3".
- [62] 3GPP TS 23.040: "Technical realization of the Short Message Service (SMS)".
- [63] 3GPP TS 29.537: "Multicast/Broadcast Policy Control Services; Stage 3".
- [64] 3GPP TS 29.214: "Policy and Charging Control over Rx reference point".
- [65] 3GPP TS 26.502: "5G multicast–broadcast services; User Service architecture".
- [66] 3GPP TS 29.580: "Multicast/Broadcast Service Function Services; Stage 3".
- [67] 3GPP TS 26.512: "5G Media Streaming (5GMS); Protocols".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

Application AM context: Information about the capabilities that an AF application requires from the access network for a registered UE. It is established by the AF before or during the use of the service that requires it.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

A-KID	AKMA Key IDentifier
A-TID	AKMA Temporary UE IDentifier
AAAnF	AKMA Anchor Function
ACS	Auto-Configuration Server
AF	Application Function
AKMA	Authentication and Key Management for Applications
AM	Access and Mobility management
ASTI	Access Stratum TIme distribution
BDT	Background Data Transfer
CAPIF	Common API Framework
CP	Communication Pattern

DN	Data Network
DNAI	DN Access Identifier
DNN	Data Network Name
EAS	Edge Application Server
ECS	Edge Configuration Server
FQDN	Fully Qualified Domain Name
GMLC	Global Mobile Location Centre
GPSI	Generic Public Subscription Identifier
IPTV	Internet Protocol Television
K _{AF}	AKMA Application Key
MBS	Multicast/Broadcast Service
MB-SMF	Multicast/Broadcast Session Management Function
MO-LR	Mobile Originated Location Request
NEF	Network Exposure Function
NSAC	Network Slice Admission Control
NSACF	Network Slice Admission Control Function
PCF	Policy Control Function
PCRF	Policy and Charging Rule Function
PFD	Packet Flow Description
PFDf	Packet Flow Description Function
REST	Representational State Transfer
SCEF	Service Capability Exposure Function
S-NSSAI	Single Network Slice Selection Assistance Information
SSM	Source Specific IP Multicast address
TAI	Traffic Area Identity
TMGI	Temporary Mobile Group Identity
TSC	Time Sensitive Communication
TSCAI	Time Sensitive Communication Assistance Information
TSCTSF	Time Sensitive Communication and Time Synchronization Function
UDR	Unified Data Repository
UP	User Plane
URSP	UE Route Selection Policy
WB	Wide Band

4 NEF Northbound Interface

4.1 Overview

The NEF Northbound interface is between the NEF and the AF. It specifies RESTful/RPC APIs that allow the AF to access the services and capabilities provided by 3GPP network entities and securely exposed by the NEF.

This document also specifies the procedures triggered at the NEF by API requests from the AF and by event notifications received from 3GPP network entities.

The stage 2 level requirements and signalling flows for the NEF Northbound interface are defined in 3GPP TS 23.502 [2], 3GPP TS 23.247 [53] for MBS specific aspects and 3GPP TS 26.531 [59] for data reporting provisioning and Media Streaming Event Exposure specific aspects.

The NEF Northbound interface supports the following procedures:

- 1) Procedures for Monitoring
- 2) Procedures for Device Triggering
- 3) Procedures for resource management of Background Data Transfer
- 4) Procedures for CP Parameters, Network Configuration Parameters Provisioning, 5G LAN Parameters Provisioning, ACS Configuration Parameter Provisioning, Location Privacy Indication Parameters Provisioning and ECS address provisioning
- 5) Procedures for PFD Management

- 6) Procedures for Traffic Influence
- 7) Procedures for changing the chargeable party at session set up or during the session
- 8) Procedures for setting up an AF session with required QoS
- 9) Procedures for MSISDN-less Mobile Originated SMS
- 10) Procedures for non-IP data delivery
- 11) Procedures for analytics information exposure
- 12) Procedure for applying BDT policy
- 13) Procedures for Enhanced Coverage Restriction Control
- 14) Procedures for IPTV Configuration
- 15) Procedures for Service Parameter Provisioning
- 16) Procedures for RACS Parameter Provisioning
- 17) Procedures for Mobile Originated Location Request
- 18) Procedures for AKMA
- 19) Procedures for AF triggered Access and Mobility Influence
- 20) Procedures for AF triggered Access and Mobility Policy Authorization
- 21) Procedures for Time Synchronization Exposure
- 22) Procedures for EAS Deployment information provisioning
- 23) Procedures for TMGI allocation, deallocation, expiry timer refresh and timer expiry notification
- 24) Procedures for MBS session management and parameters provisioning.
- 25) Procedures for Data Reporting.
- 26) Procedures for Data Reporting Provisioning.
- 27) Procedures for AF specific UE ID retrieval.
- 28) Procedures for Media Streaming Event Exposure.
- 29) Procedures for MBS User Service management.
- 30) Procedures for MBS User Data Ingest Session management.

Which correspond to the following services respectively, supported by the NEF as defined in 3GPP TS 23.502 [2] or 3GPP TS 26.531 [59]:

- 1) Nnef_EventExposure service and Nnef_APISupportCapability service
- 2) Nnef_Trigger service
- 3) Nnef_BDTPNegotiation service
- 4) Nnef_ParameterProvision service
- 5) Nnef_PFDManagement service
- 6) Nnef_TrafficInfluence service
- 7) Nnef_ChargeableParty service
- 8) Nnef_AFsessionWithQoS service

- 9) Nnef_MSISDN-less_MO_SMS service
- 10) Nnef_NIDDConfiguration and Nnef_NIDD services
- 11) Nnef_AnalyticsExposure service
- 12) Nnef_ApplyPolicy service
- 13) Nnef_ECRestriction service
- 14) Nnef_IPTVConfiguration service
- 15) Nnef_ServiceParameter service
- 16) Nnef_UCMFProvisioning service
- 17) Nnef_Location service
- 18) Nnef_AKMA service
- 19) Nnef_AMInfluence
- 20) Nnef_AMPolicyAuthorization service
- 21) Nnef_TimeSynchronization and Nnef_ASTI services
- 22) Nnef_EASDeployment service
- 23) Nnef_MBSTMGI service
- 24) Nnef_MBSSession service
- 25) Nnef_DataReporting
- 26) Nnef_DataReportingProvisioning
- 27) Nnef_UEId service
- 28) Nnef_MSEventExposure service
- 29) Nnef_MBSUserService
- 30) Nnef_MBSUserDataIngestSession

NOTE 1: For Nnef_PFDManagement service, only the Nnef_PFDManagement_Create/Update/Delete service operations are applicable for the NEF Northbound interface.

NOTE 2: For Nnef_NIDD service, NF consumer other than the AF does not use the NEF Northbound interface.

NOTE 3: For Nnef_NIDDConfiguration service, the Nnef_NIDDConfiguration_Trigger service operation is only applicable for the NEF Northbound interface.

NOTE 4: The Nnef_APISupportCapability service is only applicable in the MonitoringEvent API when the monitoring type sets to "API_SUPPORT_CAPABILITY".

NOTE 5: The Nnef_MSEventExposure service maps to the Nnef_EventExposure service and is applicable for the case where the event consumer AF in the Application Service Provider is deployed outside the trusted domain, as described in 3GPP TS 26.531 [59], and the subscribed event is set to "MS_QOE_METRICS", "MS_CONSUMPTION", "MS_NET_ASSIST_INVOCATION", "MS_DYN_POLICY_INVOCATION", or "MS_ACCESS_ACTIVITY".

4.2 Reference model

The NEF Northbound interface resides between the NEF and the AF as depicted in figure 4.2.1. The overall NEF architecture is depicted in 3GPP TS 23.502 [2]. An AF can get services from multiple NEFs, and an NEF can provide services to multiple AFs.

NOTE: The AF can be provided by a third party.




Figure 4.2-1: Reference Architecture for the Nnef Service; SBI representation



Figure 4.2-2: Reference Architecture for the Nnef Service; reference point representation

4.3 Functional elements

4.3.1 NEF

The Network Exposure Function (NEF) is a functional element that supports the following functionalities:

- The NEF shall securely expose network capabilities and events provided by 3GPP NFs to AF.
- The NEF shall provide means for the AF to securely provide information to 3GPP network and may authenticate, authorize and assist in throttling the AF.
- The NEF shall be able to translate the information received from the AF to the one sent to internal 3GPP NFs, and vice versa.
- The NEF shall support to expose information (collected from other 3GPP NFs) to the AF.
- The NEF may support a PFD Function which allows the AF to provision PFD(s) and may store and retrieve PFD(s) in the UDR. The NEF further provisions PFD(s) to the SMF.
- The NEF may support the time synchronization exposure function to the AF.
- The NEF may provide means for the AF to influence access and mobility management related policies.
- The NEF may provide means for the AF to provide inputs that can be used by the PCF for deciding access and mobility management related policies.
- The NEF may provide means for the AF to provide the EAS Deployment information.
- The NEF may provide means for the AF to retrieve AF specific UE ID.
- The NEF may provide means for an untrusted event consumer AF to perform Media Streaming Event Exposure monitoring.

A specific NEF instance may support one or more of the functionalities described above and consequently an individual NEF may support a subset of the APIs specified for capability exposure.

NOTE: The NEF can access the UDR located in the same PLMN as the NEF.

4.3.2 AF

The Application Function (AF) may interact with the 3GPP Core Network via the NEF in order to access network capabilities.

4.4 Procedures over NEF Northbound Interface

4.4.1 Introduction

All procedures that operate across the NEF Northbound interface, as specified in 3GPP TS 23.502 [2], and in 3GPP TS 23.247 [53] for MBS specific aspects, are specified in the following clauses.

4.4.2 Procedures for Monitoring

The procedures for monitoring as described in clause 4.4.2 of 3GPP TS 29.122 [4] shall be applicable in 5GS with the following differences:

- description of the SCS/AS applies to the AF;
- description of the SCEF applies to the NEF;
- description of the HSS applies to the UDM, and the NEF shall interact with the UDM by using Nudm_EventExposure service as defined in 3GPP TS 29.503 [17];
- description of the MME/SGSN applies to the AMF, the NEF shall resolve a location area to the involved AMF(s) either by local configuration or via the NRF, and the NEF shall interact with the AMF by using Namf_EventExposure service as defined in 3GPP TS 29.518 [18];
- description about the PCRF is not applicable;
- description about the change of IMSI-IMEI(SV) association monitoring event applies to the change of SUPI-PEI association monitoring event;
- when "monitoringType" sets to "LOCATION_REPORTING" within the MonitoringEventSubscription data type as defined in clause 5.3.2.1.2 of 3GPP TS 29.122 [4] during the monitoring event subscription, only "CGI_ECGI", "TA_RA", "GEO_AREA" and "CIVIC_ADDR" within the Accuracy data type as defined in clause 5.3.2.4.7 of 3GPP TS 29.122 [4], are applicable for 5G MonitoringEvent API;
- after validation of the AF request, the NEF may determine a monitoring expiry time, based on operator policy and take into account the monitoring expire time if included in the request; and the NEF may provide a expiry time (determined by the NEF, UDM or AMF) to the AF even the AF does not provided before;
- if the "Loss_of_connectivity_notification" feature as defined in clause 5.3.4 of 3GPP TS 29.122 [4] is supported, values 0-5 are not applicable for the lossOfConnectReason attribute within MonitoringEventReport data type, the lossOfConnectReason attribute shall be set to 6 if the UE is deregistered, 7 if the maximum detection timer expires or 8 if the UE is purged;
- the AF may include a periodic reporting time indicated by the "repPeriod" attribute within MonitoringEventSubscription data type, which is only applicable for the "Location_notification" and "NSAC" features in the NEF;
- if the "locationType" attribute sets to "LAST_KNOWN_LOCATION", the "maximumNumberOfReports" attribute shall set to 1 as a One-time Monitoring Request;
- description about the PDN connectivity status event applies to the PDU session status event, the description of the MME/SGSN applies to the SMF during the reporting of monitoring event procedure, the NEF receives the event notification via Nsmf_EventExposure service as defined in 3GPP TS 29.508 [26];

- if the "Session_Management_Enhancement" feature as defined in clause 5.3.4 of 3GPP TS 29.122 [4] is supported, the "dnn" and/or "snssai" may be provided in MonitoringEventSubscription data type for monitoring type provided "PDN_CONNECTIVITY_STATUS" or "DOWNLINK_DATA_DELIVERY_STATUS";
- when sending the UDM/AMF/SMF event report to the AF, the NEF may store the event data in the report in the UDR as part of the data for exposure as specified in 3GPP TS 29.519 [23] by using Nudr_DataRepository service as specified in 3GPP TS 29.504 [20];
- if the "Downlink_data_delivery_status_5G" feature as defined in clause 5.3.4 of 3GPP TS 29.122 [4] is supported, in order to support the downlink data delivery status notification;
 - 1) the AF shall send an HTTP POST message to the NEF to the resource "Monitoring Event Subscriptions" as defined in clause 5.3.3.2 of 3GPP TS 29.122 [4] for creating a subscription or send an HTTP PUT message to the NEF to the resource "Individual Monitoring Event Subscription" as defined in clause 5.3.3.3 of 3GPP TS 29.122 [4] for updating the subscription with the following difference:
 - A) within the MonitoringEventSubscription data structure the AF may additionally include packet filter descriptor(s) within the "dddTraDescriptors" attribute and the list of monitoring downlink data delivery status event(s) within the "dddStati" attribute; and
 - B) the NEF shall subscribe the events to the appropriate UDM(s) within the network by invoking the Nudm_EventExposure_Subscribe service operation as defined in clause 5.5.2.2 of 3GPP TS 29.503 [17];
 - 2) if the "Partial_group_modification" feature as defined in clause 5.3.4 of 3GPP TS 29.122 [4] is supported, in order to support partial cancellation or addition of certain UE(s) within the active group event subscription, the NEF shall map the "excludedExternalIds" and/or "excludedMsisdns" attributes to the "excludeGpsiList" attribute for the partial group cancellation, or shall map the "addedExternalIds" and/or "addedMsisdns" attributes to the "includeGpsiList" attribute within the Nudm_EventExposure service; and
 - 3) when the NEF receives the event notification as defined in clause 4.4.2 of 3GPP TS 29.508 [26], the NEF shall send an HTTP POST message to the AF as defined in clause 4.4.2.3 of 3GPP TS 29.122 [4] with the difference that within each MonitoringEventReport data structure, the NEF shall include:
 - A) the downlink data delivery status within the "dddStatus" attribute;
 - B) the downlink data descriptor impacted by the downlink data delivery status change within the "dddTraDescriptor" attribute;
 - C) the estimated buffering time within the "maxWaitTime" attribute if the downlink data delivery status is set to "BUFFERED"; and
 - D) if the "Availability_after_DDN_failure_notification_enhancement" feature as defined in clause 5.3.4 of 3GPP TS 29.122 [4] is supported, the AF shall send an HTTP POST message to the NEF to the resource "Monitoring Event Subscriptions" as defined in clause 5.3.3.2 of 3GPP TS 29.122 [4] for creating a subscription or send an HTTP PUT message to the NEF to the resource "Individual Monitoring Event Subscription" as defined in clause 5.3.3.3 of 3GPP TS 29.122 [4] for updating the subscription with the difference that within the MonitoringEventSubscription data structure, the AF shall include packet filter descriptions within the "dddTraDescriptors" attribute;
- if the "eLCS" feature as defined in clause 5.3.4 of 3GPP TS 29.122 [4] is supported, the AF may send an HTTP POST message to the NEF to the resource "Monitoring Event Subscriptions" as defined in clause 5.3.3.2 of 3GPP TS 29.122 [4] for creating a subscription or send an HTTP PUT message to the NEF to the resource "Individual Monitoring Event Subscription" as defined in clause 5.3.3.3 of 3GPP TS 29.122 [4] for updating the subscription with the following difference:
 - 1) within the MonitoringEventSubscription data structure, the AF may additionally include location QoS requirement within the "locQoS" attribute, the service identifier within the "svcId" attribute, Location deferred requested event type within the "ldrType" attribute, the validity start time and the validity end time within the "locTimeWindow" attribute, the maximum age of location estimate within the "maxAgeOfLocEst" attribute, the requesting target UE velocity within the "velocityRequested" attribute, the linear distance within the "linearDistance" attribute, the reporting target UE location estimate indication within the "reportingLocEstInd" attribute, the sampling interval within the "samplingInterval" attribute, the maximum reporting expire interval within the "maxRptExpireIntvl" attribute, the supported GAD shapes within the "supportedGADShapes" attribute, the Code word within the "codeword" attribute, and other attributes as

defined in clause 5.3.2.3.2 of 3GPP TS 29.122 [4] for location information subscription; The MonitoringEventSubscription data structure may also include the "locationArea5G" attribute containing only the "geographicAreas" attribute and the "accuracy" attribute set to the value "GEO_AREA". The "accuracy" attribute and "locQoS" attribute are mutually exclusive. If the "MULTIQOS" feature is also supported, Multiple QoS Class is supported in the "lcsQoSClass" attribute within the "locQoS" attribute for deferred MT-LR;

- 2)if the NEF identifies the location request precision higher than cell level location accuracy is required based on the "locQoS" attribute received, the NEF shall interact with the appropriate GMLC within the network by invoking the Ngmlc_Location_ProvideLocation service operation as defined in clause 6.1 of 3GPP TS 29.515 [35];
- 3)if the location request precision is lower than or equal to cell level, based on implementation, the NEF may interact with the GMLC by invoking the Ngmlc_Location_ProvideLocation service operation as defined in clause 6.1 of 3GPP TS 29.515 [35]; or retrieve the UE location privacy information from the UDM by using Nudm_SDM service as described in clause 5.2 of 3GPP TS 29.503 [17] and if the privacy setting is verified, the NEF shall interact with the UDM for the serving AMF address by invoking the Nudm_UECM service as described in clause 5.3 of 3GPP TS 29.503 [17]. After receiving the serving AMF address from the UDM, the NEF shall interact with the AMF by invoking the Namf_EventExposure_Subscribe service operation as defined in clause 5.3 of 3GPP TS 29.518 [18]; or may interact with UDM by using Nudm_EventExposure service as defined in clause 5.5 of 3GPP TS 29.503 [17] and the NEF receives the location event notification from the AMF via Namf_EventExposure service as defined in in clause 5.5 of 3GPP TS 29.518 [18]; and
- 4)based on the received AF information and local authorization policy, the NEF shall derive the LCS client type with a suitable enumeration value for the AF location request, to be provided as the "externalClientType" attribute when invoking the Ngmlc_Location_ProvideLocation service operation as defined in clause 6.1 of 3GPP TS 29.515 [35];

Upon receipt of successful location response from the GMLC or the AMF or the UDM, the NEF shall create or update the "Individual Monitoring Event Subscription" resource and then send an HTTP POST or PUT response to the AF as defined in clause 4.4.2.2 of 3GPP TS 29.122 [4]. Upon receipt of the location Report from the GMLC or the AMF, the NEF shall determine the monitoring event subscription associated with the corresponding Monitoring Event Report as defined in clause 4.4.2.3 of 3GPP TS 29.122 [4].

In order to delete a previous active configured monitoring event subscription at the NEF, the AF shall send an HTTP DELETE message to the NEF to the resource "Individual Monitoring Event Subscription" which is received in the response to the request that has created the monitoring events subscription resource. The NEF shall interact with the GMLC or the AMF or the UDM to remove the request, upon receipt of the successful response from the GMLC or the AMF or the UDM, the NEF shall delete the active resource "Individual Monitoring Event Subscription" addressed by the URI and send an HTTP response to the AF with a "204 No Content" status code, or a "200 OK" status code including the monitoring event report if received;

- Based on local regulations' requirements and operator policies, user consent management specified in Annex V of 3GPP TS 33.501 [6] may be required for EDGE applications to access the Nnef_EventExposure API for UE's location retrieval. When it is the case and the NEF is used by the Edge Enabler Layer entities to access 3GPP 5GC services, the NEF acts as the consent enforcement entity, as specified in clause 5.1.3 of 3GPP TS 33.558 [56];

When user consent management shall be carried out for EDGE applications, then:

- 1)if the AF (e.g. Edge Enabler Server) does not support the "UserConsentRevocation" feature or does not indicate its support for this feature in the HTTP POST request to create a new "Individual Monitoring Event Subscription" resource with the "monitoringType" attribute set to "LOCATION_REPORTING", the NEF shall reject the request and respond to the AF with an HTTP "403 Forbidden" status code with the response body including a ProblemDetails data structure containing the "CONSENT_REVOCATION_NOT_SUPPORTED" application error within the "cause" attribute;
- 2)if the AF indicates its support for the "UserConsentRevocation" feature in the HTTP POST request to create a new "Individual Monitoring Event Subscription" resource with the "monitoringType" attribute set to "LOCATION_REPORTING", the NEF shall check user consent for the targeted UE(s) by retrieving the user consent subscription data via the Nudm_SDM service API of the UDM as specified in clause 5.2.2.2.24 of 3GPP TS 29.503 [17], subscribe to user consent revocation notifications only for those UE(s) for which user consent is granted also using the Nudm_SDM service API of the UDM and accept the request for the creation of the event monitoring subscription only for the UE(s) for which user consent is granted;

- 3) if user consent is not granted for all the targeted UE(s), the NEF shall reject the request and respond to the AF with an HTTP "403 Forbidden" status code with the response body including a ProblemDetails data structure including the "USER_CONSENT_NOT_GRANTED" application error within the "cause" attribute;
- 4) the AF shall provide within the HTTP POST request to create a new event monitoring subscription the URI via which it desires to receive user consent revocation notifications within the "revocationNotifUri" attribute. The AF may update this URI in subsequent HTTP PUT/PATCH requests to update/modify the corresponding "Individual Monitoring Event Subscription" resource;
- 5) when becoming aware of user consent revocation for one or several UE(s), the NEF shall:
 - A) stop processing the data related to the concerned UE(s);
 - B) send a user consent revocation notification to the AF by sending an HTTP POST request with the request body including the ConsentRevocNotif data structure that shall contain the user consent revocation information (e.g. UE(s) for which user consent was revoked, etc.); and
 - C) remove the concerned UE(s) from the corresponding "Individual Monitoring Event Subscription" resource and from the related subscriptions at the GMLC, if any; and
 - D) unsubscribe from user consent revocation notifications for the concerned UE(s) at the UDM;and
- 6) at the reception of the user consent revocation notification from the NEF, the AF shall take the necessary actions to stop processing the data related to the UE(s) for which user consent was revoked;
 - if user consent is revoked for all the UE(s), the AF shall delete the corresponding "Individual Monitoring Event Subscription" resource as specified above in this clause.
 - if the "NSAC" feature defined in clause 5.3.4 of 3GPP TS 29.122 [4] is supported, in order to support network slice status reporting:
 - 1) the AF shall send an HTTP POST request to the NEF to the "Monitoring Event Subscriptions" resource as defined in clause 5.3.3.2.3.4 of 3GPP TS 29.122 [4] to create a subscription, or send an HTTP PUT message to the NEF to the "Individual Monitoring Event Subscription" resource as defined in clause 5.3.3.3.2 of 3GPP TS 29.122 [4] to update an existing subscription with the following differences:
 - A) within the MonitoringEventSubscription data structure:
 - a) either the concerned network slice identified by the "snssai" attribute, in the case of a trusted AF, or the AF service identifier within the "afServiceId" attribute, in the case of an untrusted AF, shall be provided;
 - b) the value of the "monitoringType" attribute shall be set to "NUM_OF_REGD_UES" to indicate that the AF requests to be notified of the current number of registered UEs for the network slice or "NUM_OF_ESTD_PDU_SESSIONS" to indicate that the AF requests to be notified of the current number of established PDU Sessions for the network slice;
 - c) the "maximumNumberOfReports" attribute set to a value of 1 shall be provided, if one-time reporting of the current network slice status information is requested;
 - d) if one-time reporting is not requested, either a targeted reporting threshold within the "tgtNsThreshold" attribute (if threshold based reporting is requested) or a reporting periodicity within the "repPeriod" attribute (if periodic reporting is requested) shall be provided;
 - e) if periodic reporting or one-time reporting is requested, the "nsRepFormat" attribute shall be provided to indicate the requested reporting format (i.e. numerical or percentage); and
 - f) the "immediateRep" attribute shall be set to "true", if immediate reporting of the current network slice status information is requested or one-time reporting of the current network slice status information is requested;
 - 2) the NEF shall then further interact with the concerned NSACF(s) to create or update the associated subscription(s) to notifications by invoking the Nnsacf_SliceEventExposure_Subscribe service operation as specified in 3GPP TS 29.536 [47];

If an AF service identifier was provided by the AF (case of an untrusted AF), the NEF shall translate it into the corresponding S-NSSAI prior to sending the request(s) to the NSACF(s).

After receiving a successful response from the NSACF(s), the NEF shall:

NOTE 1: If multiple NSACFs are selected for the requested S-NSSAI, the NEF can set the event reporting type to periodic in its request to these NSACFs, irrespective of the requested reporting type by the AF (i.e. threshold based reporting or periodic reporting).

A) for the HTTP POST request, respond to the AF as defined in clause 5.3.3.2.3.4 of 3GPP TS 29.122 [4] with either;

a) a "201 Created" status code and the response body containing the created "Individual Monitoring Event Subscription" resource within the MonitoringEventSubscription data structure. The NEF shall include the current network slice status information received from the NSACF within the "monitoringEventReport" attribute, if available and the "immediateRep" attribute was provided and set to "true" in the request; or

b) a "200 OK" status code and the response body containing the current network slice status information received from the NSACF within the "MonitoringEventReport" data structure, if it is a one-time reporting request with the "immediateRep" attribute set to "true"; and

B) for the HTTP PUT request, respond to the AF with a "200 OK" status code as defined in clause 5.3.3.3.2 of 3GPP TS 29.122 [4] and the response body including the MonitoringEventSubscription data structure containing a representation of the updated "Individual Monitoring Event Subscription" resource. The NEF shall include the current network slice status information received from the NSACF within the "monitoringEventReport" attribute, if available and the "immediateRep" attribute was provided and set to "true" in the request;

NOTE 2: When the "maximumNumberOfReports" attribute is provided and set to a value of 1 and the "immediateRep" attribute is provided and set to "true", the Individual Monitoring Event Subscription is immediately terminated after returning the current network slice status information in the HTTP POST response body.

NOTE 3: After sending a subscription creation request for network slice status reporting with a particular reporting format (e.g. percentage) for periodic reporting, an AF cannot send a subsequent subscription creation request for the same network slice with a different reporting format (e.g. numerical) for periodic reporting.

3) when the NEF receives event report(s) from the NSACF(s) as defined in 3GPP TS 29.536 [47], the NEF shall notify the AF via an HTTP POST message as defined in clause 5.3.3A.2.3 of 3GPP TS 29.122 [4] with the following differences:

A) within the MonitoringEventReport data type of the MonitoringNotification data type;

a) the value of the "monitoringType" attribute shall be set to "NUM_OF_REGD_UES" or "NUM_OF_ESTD_PDU_SESSIONS" (i.e. the same value received during the HTTP POST or PUT request that created or modified the subscription);

b) the AF service identifier to which the notification is related, within the "afServiceId" attribute, if it was provided by the AF in the related subscription request; and

c) the current network slice status information as the "nSStatusInfo" attribute shall be provided, wherein:

I) if the event reporting is threshold based (i.e. the "tgtNsThreshold" was provided within the MonitoringEventSubscription data type), the "nSStatusInfo" attribute shall contain a confirmation for reaching the targeted threshold value, i.e. by sending the current number of registered UEs or the current number of established PDU Sessions, for the network slice identified by the "snssai" attribute provided during the subscription creation/update; and

II) if the event reporting is periodical (i.e. the "repPeriod" was provided within the MonitoringEventSubscription data type), the "nSStatusInfo" attribute shall provide the current network slice status information, i.e. the current number of registered UEs or the current number of established PDU Sessions for the network slice identified by the "snssai" attribute provided during the subscription creation/update; and

NOTE 4: The handling of threshold based notifications is described in clause 4.15.3.2.10 of 3GPP TS 23.502 [2].

NOTE 5: If the NEF interacts with multiple NSACFs for the requested S-NSSAI, the NEF performs the aggregation of the received network slice status reports from all these NSACFs and determines based on that whether a notification towards the subscribing AF needs to be sent or not (i.e. the reporting conditions to trigger a notification towards the AF are fulfilled or not).

- 4) in order to unsubscribe from network slice status reporting, the AF shall send an HTTP DELETE message to the NEF to the resource "Individual Monitoring Event Subscription" as defined in clause 5.3.3.3.3.5 of 3GPP TS 29.122 [4] to delete an existing network slice reporting subscription. Then the NEF shall interact with the NSACF to delete the associated subscription to notifications by invoking the `Nnsacf_SliceEventExposure_Unsubscribe` service operation as specified in 3GPP TS 29.536 [47]; and
- if the "UEId_retrieval" feature defined in clause 5.3.4 of 3GPP TS 29.122 [4] is supported, in order to support AF specific UE ID retrieval:
 - 1) the AF may request AF specific UE ID retrieval for an individual UE, by providing the UE's IP address in the "ueIpAddr" attribute or the UE's MAC address in the "ueMacAddr" attribute within the `MonitoringEventSubscription` data type;
 - 2) the AF may also provide the DNN, within the "dnn" attribute, and/or the S-NSSAI, within the "snssai" attribute, in the `MonitoringEventSubscription` data type;
 - 3) upon reception of the corresponding subscription request message from the AF, the NEF shall check whether the AF is authorized to perform this operation or not:
 - if the AF's request is not authorized, the NEF shall respond to the AF with a "403 Forbidden" status code with the response body including the `ProblemDetails` data structure containing the "cause" attribute set to the "REQUEST_NOT_AUTHORIZED" application error indicating AF authorisation failure; and
 - if the AF request is authorized by the NEF, then if the DNN and/or S-NSSAI information is not available in the request, the NEF shall determine the corresponding DNN and/or S-NSSAI information based on the received requesting AF Identifier, and if provided, the MTC Provider Information;
 - 4) the NEF shall then interact with the BSF using the UE address and IP domain (if the UE IPv4 address is provided), DNN and/or S-NSSAI to retrieve the session binding information of the UE by invoking the `Nbsf_Management_Discovery` service operation as described in 3GPP TS 29.521 [9];
 - 5) if the NEF receives an error response from the BSF, the NEF shall respond to the AF with a proper error status code. If the NEF received from the BSF an error response including a "ProblemDetails" data structure with the "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error. If no SUPI matching the provided UE information is returned by the BSF, the NEF shall respond to the AF with a "404 Not Found" status code with the response body including a `ProblemDetails` data structure containing the "cause" attribute set to the "UE_NOT_FOUND" application error to indicate that the requested UE address is not found;
 - 6) upon success and a SUPI is returned by the BSF, the NEF shall then interact with the UDM to retrieve the AF specific UE Identifier using the received SUPI and at least one of the Application Port ID, MTC Provider Information or AF Identifier information by invoking `Nudm_SDM_Get` service as described in clause 5.2.2.2 of 3GPP TS 29.503 [17];
 - 7) upon success, the UDM responds to the NEF with an AF specific UE Identifier represented as an External Identifier for the UE which is uniquely associated with the MTC provider Information and/or AF Identifier. The NEF shall then respond to the AF with the received information, i.e. the AF specific UE Identifier represented as an External Identifier that was received from the UDM;
 - 8) if the NEF receives an error response from the UDM, the NEF shall respond to the AF with a proper error status code. If the NEF received from the UDM an error response including a "ProblemDetails" data structure with the "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error. If the UDM indicates that the requested UE Identifier is not available in the subscription data, the NEF shall respond to the AF with a "404 Not Found" error status code with the response body including a `ProblemDetails` data structure containing the "cause" attribute set to the "UE_ID_NOT_AVAILABLE" application error to indicate that the AF specific UE ID is not available.

NOTE 6: The case where the UE's IP address provided by the AF to the NEF corresponds to an IP address that has been NATed (Network and Port Address Translation) is not supported in this release of the specification.

4.4.3 Procedures for Device Triggering

The procedures for device triggering as described in clause 4.4.6 of 3GPP TS 29.122 [4] shall be applicable in 5G with the following differences:

- description of the SCS/AS applies to the AF;
- description of the SCEF applies to the NEF;
- description of the HSS applies to the UDM;
- the NEF shall interact with the UDM by using the Nudm_SubscriberDataManagement service and the Nudm_UEContextManagement service as defined in 3GPP TS 29.503 [17]; and
- the NEF acts as MTC-IWF.

4.4.4 Procedures for resource management of Background Data Transfer

The procedures for resource management of Background Data Transfer (BDT) in 5GS are described in clause 4.4.3 of 3GPP TS 29.122 [4] with the following differences:

- description of the SCS/AS applies to the AF;
- description of the SCEF applies to the NEF;
- If the feature Group_Id is supported, an external group identifier may be included in the HTTP POST or PUT request message by the NEF. If the external group Id is sent from the AF to the NEF, the NEF shall interact with the UDM by using Nudm_SubscriberDataManagement service as defined in 3GPP TS 29.503 [17] to translate the external group identifier into the corresponding internal group identifier;
- description of the PCRF applies to the PCF;
- the NEF shall interact with the PCF by using Npcf_BDTPolicyControl service as defined in 3GPP TS 29.554 [19];
- if the "BdtNotification_5G" feature is supported, the AF may include a notification URI within the "notificationDestination" attribute in the Bdt data type during the background data transfer policy negotiation. In addition, the AF may request to enable the BDT warning notification by setting the "warnNotifEnabled" attribute to true. When the NEF receives the BDT warning notification from the PCF as defined in clause 4.2.4.2 of 3GPP TS 29.554 [19] and the "warnNotifEnabled" attribute was set to true, the NEF shall send an HTTP POST message including the ExNotification data structure to the AF identified by the notification destination URI received during the background data transfer policy negotiation. The AF shall respond with an HTTP response to confirm the received notification. The AF may select one policy from the candidate of BDT policies if provided in the notification by using the HTTP PATCH message as described in clause 5.4.3.3.3 of 3GPP TS 29.122 [4]. If the selected policy is set to value "0" within the "selectedPolicy" attribute in the HTTP PATCH message, it implies no transfer policy is selected by the AF. The AF may also request to disable/enable the BDT warning notification by including the "warnNotifEnabled" attribute in the HTTP PATCH message; and
- The AF may include a traffic descriptor of background data within the "trafficDes" attribute in the Bdt data type during the background data transfer policy negotiation.

4.4.5 Procedures for CP Parameters Provisioning

The procedures for CP parameters provisioning as described in clause 4.4.9 of 3GPP TS 29.122 [4] shall be applicable in 5G with the following differences:

- description of the SCS/AS applies to the AF;
- description of the SCEF applies to the NEF;

- description of the HSS applies to the UDM;
- the NEF shall interact with the UDM by using Nudm_ParameterProvision service as defined in 3GPP TS 29.503 [17];
- if the ExpectedUMT_5G feature as defined in clause 5.10.4 of 3GPP TS 29.122 [4] is supported, the expected UE moving trajectory within the "expectedUmts" attribute shall also be included in the HTTP POST/PUT request. In addition, if the ExpectedUmtTime_5G feature as defined in clause 5.10.4 of 3GPP TS 29.122 [4] is supported, the start time and duration may be provided in the "expectedUmts" attribute to indicate when the UE arrives at a location and how long the UE stays in the location and the periodicity in the "expectedUmtDays" attribute may be provided to indicate the effective days within a week; and
- if the "UEId_retrieval" feature defined in clause 5.10.4 of 3GPP TS 29.122 [4] is supported, in order to support the AF specific UE ID retrieval:
 - 1) the AF may request AF specific UE ID retrieval for an individual UE, by providing the UE's IP address in the "ueIpAddr" attribute or the UE's MAC address in the "ueMacAddr" attribute within the CpInfo data type;
 - 2) the AF may also provide the DNN, within the "dnn" attribute, and/or the S-NSSAI, within the "snssai" attribute, within the CpInfo data type;
 - 3) upon reception of the corresponding request message from the AF:
 - if the AF's request is not authorized, the NEF shall respond to the AF with a "403 Forbidden" status code with the response body including the ProblemDetails data structure containing the "cause" attribute set to the "REQUEST_NOT_AUTHORIZED" application error indicating AF authorisation failure; and
 - if the AF's request is authorized by the NEF, then if the DNN and/or S-NSSAI information is not available in the request, the NEF shall determine the corresponding DNN and/or S-NSSAI information based on the received requesting AF Identifier, and if provided, the MTC Provider Information;
 - 4) the NEF shall interact using the the BSF with UE address and IP domain (if the UE IPv4 address is provided), DNN and/or S-NSSAI to retrieve the session binding information of the UE by invoking the Nbsf_Management_Discovery service operation as described in 3GPP TS 29.521 [9];
 - 5) if the NEF receives an error response from the BSF, the NEF shall respond to the AF with a proper error status code. If the NEF received from the BSF an error response including a "ProblemDetails" data structure with the "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error. If no SUPI matching the provided UE information is returned by the BSF, the NEF shall respond to the AF with a "404 Not Found" status code with the response body including a ProblemDetails data structure containing the "cause" attribute set to the "UE_NOT_FOUND" application error to indicate that the requested UE address is not found;
 - 6) upon success and a SUPI is returned by the BSF, the NEF shall interact with the UDM to retrieve the AF specific UE Identifier using the received SUPI and at least one of the Application Port ID, MTC Provider Information or AF Identifier information by invoking Nudm_SDM_Get service as described in clause 5.2.2.2 of 3GPP TS 29.503 [17];
 - 7) upon success, the UDM responds to the NEF with the AF specific UE Identifier represented as an External Identifier for the UE which is uniquely associated with the MTC provider Information and/or AF Identifier. The NEF shall then respond to the AF with the received information, i.e. the AF specific UE Identifier represented as an External Identifier that was received from the UDM;
 - 8) if the NEF receives an error response from the UDM, the NEF shall respond to the AF with a proper error status code. If the NEF received from the UDM an error response including a "ProblemDetails" data structure with the "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error. If the UDM indicates that the requested UE Identifier is not available in the subscription data, the NEF shall respond to the AF with a "404 Not Found" error status code with the response body including a ProblemDetails data structure containing the "cause" attribute set to the "UE_ID_NOT_AVAILABLE" application error to indicate that the AF specific UE ID is not available.

NOTE: The case where UE's IP address provided by the AF to the NEF corresponds to an IP address that has been NATed (Network and Port Address Translation) is not supported in this release of the specification.

4.4.6 Procedures for PFD Management

The procedures for PFD management as described in clause 4.4.10 of 3GPP TS 29.122 [4] shall be applicable for 5GS with the following differences:

- description of the SCS/AS applies to the AF;
- description of the SCEF applies to the NEF; and
- the NEF (PFDF) shall interact with the UDR for PFD management by using Nudr_DataRepository service as defined in 3GPP TS 29.504 [20]. The PFDF is functionality within the NEF.
- If the PFDs are provisioned to at least one of the subscribed SMFs (but not all) within the allowed delay, the NEF (PFDF) may notify the AF about the failed PFD provisioning with the HTTP POST message by including the PfdReport data structure in the body of the message. In addition, the NEF may include the location area(s) of the user plane(s) which are unable to enforce the provisioned PFD(s) within the "locationArea" attribute of the PFD report(s). If the PFDs are provisioned to none of the subscribed SMFs within the allowed delay, the NEF (PFDF) shall notify the AF about the failed PFD provisioning with the HTTP POST message using appropriate failure code as defined in Table 5.11.2.2.3-1 of 3GPP TS 29.122 [4].

NOTE 1: Unsuccessful PFDs provisioning to the subscribed SMFs within the allowed delay means that the PFDs are not provisioned successfully to the UPFs served by the failed SMFs.

NOTE 2: The NEF maps the 3GPP network area(s) to the geographic area(s), civic address(es) or DNAI(s) if the 3GPP network area(s) is not allowed to be exposed to the 3rd party according to the operator policy.

4.4.7 Procedures for Traffic Influence

4.4.7.1 General

In order to create a resource for the Traffic Influence, the AF shall send an HTTP POST message to the NEF to the resource "Traffic Influence Subscription", the body of the HTTP POST message may include the AF Service Identifier, external Group Identifier, any UE Indication, the UE address, GPSI, DNN, S-NSSAI, Application Identifier or traffic filtering information, Subscribed Event, Notification destination address, a list of geographic areas(s), AF Transaction Identifier, a list of DNAI(s), routing profile ID(s) or N6 traffic routing information, Indication of application relocation possibility, type of notifications, Temporal validity conditions, and if the URLLC feature is supported, Indication of AF acknowledgement to be expected and/or Indication of UE IP address preservation. If the AF_latency feature is supported, user plane latency requirements may also be included and may support the indication of simultaneous connectivity in the "simConnInd" attribute and the minimum time interval for inactivity of traffic via source PSA in the "simConnTerm" attribute. If the EASDiscovery feature is supported, the indication of the EAS rediscovery may also be included. If the EASIPreplacement feature is supported, EAS IP replacement information may also be included. If the EDGEAPP feature is supported and the "subscribedEvents" attribute is provided, the event reporting requirements may also be included within the "eventReq" attribute. The Notification destination address shall be included if the Subscribed Event is included in the HTTP request message.

In order to update an existing traffic influence subscription, the AF shall send an HTTP PUT or PATCH message to the resource "Individual Traffic Influence Subscription" requesting to change the traffic influence parameters.

In order to delete an existing traffic influence subscription, the AF shall send an HTTP DELETE message to the NEF to the resource "Individual Traffic Influence Subscription".

Upon receipt of the HTTP request from the AF, if the AF is authorized, the NEF shall perform the mapping as described in 3GPP TS 23.501 [3], and then perform as described in clause 4.4.7.2 if the request is identified by UE address or perform as described in clause 4.4.7.3 if the request is not identified by UE address.

If the EDGEAPP feature is supported and the "subscribedEvents" attribute is provided in the received HTTP POSTrequest, and immediate reporting was requested by the AF, then user plane path management report(s) shall be included in the HTTP POST response within the "eventReports" attribute, if available. They may also be included in the HTTP PUT/PATCH response, if available.

NOTE: The EAS IP Replacement information and the information indicating the EAS rediscovery are not provided simultaneously.

4.4.7.2 AF request identified by UE address

Upon receipt of the above AF request which is for an individual UE identified by IP or Ethernet address, the NEF may interact with the BSF to retrieve the related PCF information by invoking the `Nbsf_Management_Discovery` service operation as described in 3GPP TS 29.521 [9]. If the NEF receives an error response from the BSF, the NEF shall not create the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

After receiving a successful response from the BSF, the NEF shall interact with the PCF by invoking the `Npcf_PolicyAuthorization` service as described in 3GPP TS 29.514 [7]. After receiving a successful response from the PCF, the NEF shall:

- for the HTTP POST request, create a resource "Individual Traffic Influence Subscription" which represents the traffic influence subscription, addressed by a URI that contains the AF Identifier and an NEF-created subscription identifier, and shall respond to the AF with a 201 Created status code, including a Location header field containing the URI for the created resource. The AF shall use the URI received in the Location header in subsequent requests to the NEF to refer to this traffic influence subscription;
- for the HTTP PUT or PATCH request, update a resource "Individual Traffic Influence Subscription" which represents the traffic influence subscription, and shall respond to the AF with a 200 OK status code with the "TrafficInfluSub" data structure as response body containing the representation of the modified "Individual Traffic Influence Subscription", or an HTTP "204 No Content" response; and
- for the HTTP DELETE request, remove all properties of the resource and delete the corresponding active resource "Individual Traffic Influence Subscription" which represents the traffic influence subscription, then shall respond to the AF with a 204 No Content status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

If the NEF receives a response with an error code from the PCF, the NEF shall not create, update or delete the resource and shall respond to the AF with a proper error status code.

4.4.7.3 AF request not identified by UE address

For AF request not identified by UE address, it may target an individual UE, a group of UEs or any UE. For an individual UE identified by GPSI, or a group of UEs identified by External Group Identifier, the NEF shall interact with the UDM by invoking the `Nudm_SubscriberDataManagement` service as described in 3GPP TS 29.503 [17] to retrieve the SUPI or Internal Group Identifier.

The NEF shall interact with the UDR to store the received traffic influence parameters from the AF by invoking the `Nudr_DataRepository` service as described in 3GPP TS 29.504 [20] and 3GPP TS 29.519 [23]. If the NEF receives an error response from the UDR, the NEF shall not create, update or delete the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

After receiving a successful response from the UDR, the NEF shall:

- for the HTTP POST request, create a resource "Individual Traffic Influence Subscription" which represents the traffic influence subscription, addressed by a URI that contains the AF Identifier and an NEF-created subscription identifier, and shall respond to the AF with a 201 Created status code, including a Location header field containing the URI for the created resource. The AF shall use the URI received in the Location header in subsequent requests to the NEF to refer to this traffic influence subscription;
- for the HTTP PUT or PATCH request, update a resource "Individual Traffic Influence Subscription" which represents the traffic influence subscription, and shall respond to the AF with a 200 OK status code with the "TrafficInfluSub" data structure as response body containing the representation of the modified "Individual Traffic Influence Subscription", or an HTTP "204 No Content" response; and
- for the HTTP DELETE request, delete the corresponding active resource "Individual Traffic Influence Subscription" which represents the traffic influence subscription, and shall respond to the AF with a 204 No Content status code.

4.4.7.4 Handling of UP path management event notification

If the NEF receives a UP path management event notification from the SMF indicating that the subscribed event has been detected, then the NEF shall provide a notification by sending an HTTP POST message that shall include the EventNotification data type at least with the subscribed event (e.g. UP Path has changed) to the AF identified by the notification destination received during creation or modification of the Individual Traffic Influence Subscription resource and, optionally, by the AF Transaction Identifier received during the creation of the Individual Traffic Influence Subscription resource. If a URI for AF acknowledgement within the "ackUri" attribute is provided by the SMF in the event notification as defined in 3GPP TS 29.508 [26], the NEF shall also provide a URI for AF acknowledgement within the "afAckUri" attribute in the EventNotification data.

Upon receipt of the event notification, the AF shall respond with a "204 No Content" status code to confirm the received event notification.

Afterwards, if a URI for AF acknowledgement within the "afAckUri" attribute is received during the UP path management event notification, the AF may determine that an application layer relocation is needed, and may then send an HTTP POST request as acknowledgement for the UP path management event notification to inform the NEF about the result of application layer relocation. If the application layer is ready and/or the application relocation is completed, within the payload of the HTTP POST request, the AF shall include the AfAckInfo data type with the "afStatus" attribute set to "SUCCESS" and may provide within the AfResultInfo data the N6 traffic routing information associated to the target DNAI as "trafficRoute" attribute and, if the "ULBuffering" feature is supported, an indication that buffering of uplink traffic to the target DNAI is needed as "upBuffInd" attribute and, if the "EASIPreplacement" feature is supported, EAS IP replacement information as "easIpReplaceInfos" attribute; otherwise, the AF shall indicate the failure by including the AfAckInfo data type in the payload with the "afStatus" attribute sets to the corresponding failure cause. The NEF Northbound interface transaction identifier generated by the AF shall also be provided as the "afTransId" attribute within the AfAckInfo data if the AF has previously provided it.

Upon receipt of the AF acknowledgement, the NEF shall respond with a "204 No Content" status code to confirm the received acknowledgement, and forward the AF acknowledgement to the SMF as described in 3GPP TS 29.508 [26].

4.4.8 Procedures for changing the chargeable party at session set up or during the session

The procedures for changing the chargeable party at session set up or during the session in 5GS are described in clause 4.4.4 of 3GPP TS 29.122 [4] with the following differences:

- description of the SCS/AS applies to the AF;
- description of the SCEF applies to the NEF;
- description of the PCRF applies to the PCF;
- in the HTTP POST request, the AF may include the AF session subscribed "dnn" attribute and/or "snsai" attribute;
- if the EthChgParty_5G feature as defined in clause 5.5.4 of 3GPP TS 29.122 [4] is supported and the request is for Ethernet UE:
 - in the HTTP POST request, the AF shall include the UE MAC address within the "macAddr" attribute instead of the UE IP address, If the AppId feature is not supported, the AF shall include the Ethernet Flow description within the "ethFlowInfo" attribute instead of the IP Flow description; otherwise, the AF shall include either the External Application Identifier within the "exterAppId" attribute or the Ethernet Flow description within the "ethFlowInfo" attribute;
 - in the HTTP PATCH request, the AF may update the Ethernet Flow description within the "ethFlowInfo" attribute or the External Application Identifier within the "exterAppId" attribute;
- the NEF may interact with BSF by using Nbsf_Management_Discovery service (as defined in 3GPP TS 29.521 [9]) to retrieve the PCF address; and
- the NEF shall interact with the PCF by using Npcf_PolicyAuthorization service as defined in 3GPP TS 29.514 [7].

4.4.9 Procedures for setting up an AF session with required QoS

The procedures for setting up an AF session with required QoS in 5GS are described in clause 4.4.13 of 3GPP TS 29.122 [4] with the following differences:

- description of the SCS/AS applies to the AF;
- description of the SCEF applies to the NEF;
- description of the PCRF applies to the PCF;
- the NEF may interact with BSF by using Nbsf_Management_Discovery service as defined in 3GPP TS 29.521 [9] to retrieve the PCF address;
- the NEF shall interact with the PCF by using Npcf_PolicyAuthorization service as defined in 3GPP TS 29.514 [7];
- in the HTTP POST request, the AF may include a "dnn" attribute and/or a "snssai" attribute; and in the HTTP PUT request, the AF shall keep the same value(s) of the "dnn" attribute and/or the "snssai" attribute as set in the HTTP POST request if provided;
- description about the INDICATION_OF_SUCCESSFUL_RESOURCES_ALLOCATION event and INDICATION_OF_FAILED_RESOURCES_ALLOCATION event apply to the SUCCESSFUL_RESOURCES_ALLOCATION event and FAILED_RESOURCES_ALLOCATION event respectively; In addition, description about the INDICATION_OF_RELEASE_OF_BEARER, INDICATION_OF_LOSS_OF_BEARER and INDICATION_OF_RECOVERY_OF_BEARER events are not applicable in this specification.
- if the EthAsSessionQoS_5G feature as defined in clause 5.14.4 of 3GPP TS 29.122 [4] is supported and the request is for Ethernet UE:
 - in the HTTP POST/PUT request, the AF shall include the UE MAC address within the "macAddr" attribute instead of the UE IP address. If the AppId feature is not supported, the AF shall include the Ethernet Flow description within the "ethFlowInfo" attribute instead of the IP Flow description; otherwise, the AF shall include either the External Application Identifier within the "exterAppId" attribute or the Ethernet Flow description within the "ethFlowInfo" attribute;
 - in the HTTP PATCH request, the AF may update the Ethernet Flow description within the "ethFlowInfo" attribute or the External Application Identifier within the "exterAppId" attribute;
- if the "QoSMonitoring_5G" feature as defined in clause 5.14.4 of 3GPP TS 29.122 [4] is supported, in order to support the QoS Monitoring, the AF shall include "qosMonInfo" attribute. The AF shall also include the "directNotifInd" attribute set to true if the "ExposureToEAS" feature is supported and the direct notification is required. Within the QoSMonitoringInformation data structure, the AF shall include:
 - one or more requested QoS Monitoring Parameter(s) within the "reqQosMonParams"; and
 - one or more report frequency within the "repFreqs" attribute; and
 - when the "repFreqs" attribute includes the value "PERIODIC", periodic time for the reporting and, if the feature "PacketDelayFailureReport" is supported, the maximum period with no QoS measurement results reported within the "repPeriod" attribute; and
 - when the "repFreqs" attribute includes the value "EVENT_TRIGGERED", the AF shall include:
 - the delay threshold for downlink with the "repThreshDI" attribute;
 - the delay threshold for uplink with the "repThreshUI" attribute; and/or
 - the delay threshold for round trip with the "repThreshRp" attribute; and
 - the minimum waiting time between subsequent reports within the "waitTime" attribute; and
 - if the feature "PacketDelayFailureReport" is supported, the maximum period with no QoS measurement results reported within the "repPeriod" attribute.

If the NEF authorizes the AF request, the NEF may create a QoS monitoring notification correlation identifier for the AF transaction during the creation of the AF resource and may provision it together with the received QoS monitoring parameters to the PCF by invoking the Npcf_PolicyAuthorization service as defined in 3GPP TS 29.514 [7] or, if the "TSC_5G" feature is supported, to the TSCTSF by invoking the Ntsctsf_QoSandTSCAssistance service as defined in 3GPP TS 29.565 [50];

- when the NEF receives the event notification for the AF transaction as defined in clause 4.2.2 of 3GPP TS 29.508 [26] or clauses 4.2.4.12 and 4.2.5.14 of 3GPP TS 29.514 [7] or, if the "TSC_5G" feature is supported, clause 5.3.2.5.7 of 3GPP TS 29.565 [50], or when the AF requested direct notification, as defined in clause 5.2.2.3 of 3GPP TS 29.564 [61], the NEF shall include one or more QoS monitoring reports within the "qosMonReports" attribute. Within the QosMonitoringReport data structure, the NEF shall include:
 - the uplink packet delays within the "ulDelays" attribute; and/or
 - the downlink packet delays within the "dlDelays" attribute; and/or
 - the round trip packet delays within the "rtDelays" attribute; or
 - if the feature "PacketDelayFailureReport" is supported, the packet delay measurement failure indicator within the "pdmf" attribute; and

NOTE 1: The PCF, the SMF, the UPF or the TSCTSF report one UL, DL and/or round-trip packet delay measurement for each periodic and/or event-triggered report as described in 3GPP TS 29.514 [7], 3GPP TS 29.508 [26], 3GPP TS 29.564 [61] and 3GPP TS 29.565 [50], i.e. the NEF can include only one element within the "ulDelays", "dlDelays", and/or "rtDelays" array(s), each one with the received report from the PCF, SMF, UPF or the TSCTSF for the UL, DL and/or round trip delay(s).

- if the "AlternativeQoS_5G" feature is supported, the AF may include an ordered list of QoS references within the "altQosReferences" attribute and, if the "DisableUENotification_5G" feature is also supported, an indication that the UE does not need to be informed about changes related to Alternative QoS Profiles within the "disUeNotif" attribute.

When the NEF interfaces directly with the PCF, the NEF shall transfer them to the PCF in the Npcf_PolicyAuthorization service and subscribe to PCF event "QOS_NOTIF" in the Npcf_PolicyAuthorization service. When the NEF receives the notification of PCF event "QOS_NOTIF", it shall notify the AF with "QOS_GUARANTEED" event or with "QOS_NOT_GUARANTEED" event and the currently applied QoS reference if received. When the NEF receives the notification of PCF event "SUCCESSFUL_RESOURCES_ALLOCATION", it shall notify the AF the event together with the currently applied QoS reference if received.

If the "TSC_5G" feature is supported, when the NEF interfaces with the TSCTSF, the NEF shall transfer the received alternative QoS references to the TSCTSF in the Ntsctsf_QoSandTSCAssistance service and subscribe with TSCTSF to "QOS_GUARANTEED" and "QOS_NOT_GUARANTEED" events. When the NEF receives the event notification from the TSCTSF, the NEF shall notify the AF with "QOS_GUARANTEED" event or with "QOS_NOT_GUARANTEED" event and the currently applied QoS reference if received. When the NEF receives the notification of TSCTSF event "SUCCESSFUL_RESOURCES_ALLOCATION", it shall notify the AF the event together with the currently applied QoS reference if received.

NOTE 2: Based on the operator configuration, the QoS reference identifiers received from the AF can be the same or different as the QoS reference identifiers known at the PCF. The NEF can perform a mapping for the QoS reference identifier.

- if the "TSC_5G" feature is supported, the AF may include:
 - the TSC QoS requirement within the "tscQosReq" attribute. Within the TscQosRequirement data structure, the AF may include:
 - the input information to construct the TSC Assistance Container within the "tscaiInputUI" attribute and/or "tscaiInputDI" attribute;

And, if individual QoS parameters instead of QoS reference is provided, may include:

- requested GBR within the "reqGbrDI" attribute and/or "reqGbrUI" attribute;
- requested MBR within the "reqMbrDI" attribute and/or "reqMbrUI" attribute; and

- the maximum burst size within the "maxTscBurstSize" attribute;
- the priority within the "priority" attribute;
- the requested 5GS delay within the "req5Gsdelay" attribute.

If the NEF authorizes the AF request, the NEF may provision the received QoS requirements to the TSCTSF by invoking the Ntsctsf_QoSandTSCAssistance_Create/Update request as defined in 3GPP TS 29.565 [50]. The NEF determines whether to invoke the TSCTSF or to directly contact the PCF based on operator configuration. This determination may consider the AF identifier, whether the "tscaiInputUI" and/or "tscaiInputDI" attributes within the "tscQosReq" attribute were received in the subscription request, whether the "qosReference" attribute or individual QoS parameters within the "tscQosReq" attribute were received in the subscription request, and SLA between operator and application provider. A TSCTSF address may be locally configured in the NEF or the NEF uses the DNN/S-NSSAI (which may be provided in the request or determined based on the AF identifier) to discover the TSCTSF from the NRF. If the NEF directly contacts the PCF while the NEF determined to invoke the TSCTSF when authorizing the update request, the NEF shall reject the request message by sending an HTTP response to the AF with a status code set to 403 Forbidden and may include the "INVALID_SESSION_UPDATE" error in the "cause" attribute of the "ProblemDetails" structure and indicate which parameters can not be served in current session in the "invalidParams" attribute of the "ProblemDetails" structure.

NOTE 3: The NEF can determine whether the TSCTSF needs to be involved based on the DNN/S-NSSAI for the AF session according to the SLA.

- if the "AltQosWithIndParams_5G" feature is supported, the AF may include:
 - an ordered list of alternative service requirements that include individual QoS parameter sets within the "altQosReqs" attribute and, if the "DisableUENotification_5G" feature is also supported, an indication that the UE does not need to be informed about changes related to Alternative QoS Profiles within the "disUeNotif" attribute. Within the AlternativeServiceRequirementsData data structure, the AF shall include:
 - a reference to the alternative individual QoS related parameter(s) included in this set within the "altQosParamSetRef" attribute; and
 - at least one of the following:
 - The guaranteed bandwidth in uplink within the "gbrUI" attribute and the guaranteed bandwidth in downlink within the "gbrDI" attribute;
 - The requested packet delay budget within the "pdb" attribute;

If the NEF authorizes the AF request, and if the "TSC_5G" feature is supported, the NEF may provision the received QoS requirements and subscribe with to the TSCTSF to "QOS_GUARANTEED" and "QOS_NOT_GUARANTEED" events by invoking the Ntsctsf_QoSandTSCAssistance_Create request as defined in 3GPP TS 29.565 [50]. The NEF determines whether to invoke the TSCTSF or to directly contact the PCF based on operator configuration. This determination may consider the AF identifier, whether the "tscaiInputUI" and/or "tscaiInputDI" attributes within the "tscQosReq" attribute were received in the subscription request, whether the "qosReference" attribute or individual QoS parameters within the "altQosReqs" attribute were received in the subscription request, and SLA between operator and application provider. A TSCTSF address may be locally configured in the NEF or the NEF uses the DNN/S-NSSAI (which may be provided in the request or determined based on the AF identifier) to discover the TSCTSF from the NRF. When the NEF receives the notification of TSCTSF "QOS_GUARANTEED" event or "QOS_NOT_GUARANTEED" event, it shall notify the AF with "QOS_GUARANTEED" event or "QOS_NOT_GUARANTEED" event with the currently applied individual QoS parameter set within the "appliedQosRef" attribute if received. When the NEF receives the notification of the TSCTSF event "SUCCESSFUL_RESOURCES_ALLOCATION", it shall notify the AF the event together with the currently applied individual QoS parameter set within the "appliedQosRef" attribute if received. If the NEF directly contacts the PCF while the NEF determined to invoke the TSCTSF when authorizing the update request, the NEF shall reject the request message by sending an HTTP response to the AF with a status code set to 403 Forbidden and may include the "INVALID_SESSION_UPDATE" error in the "cause" attribute of the "ProblemDetails" structure and indicate which parameters can not be served in current session in the "invalidParams" attribute of the "ProblemDetails" structure.

NOTE 4: The NEF can determine whether the TSCTSF needs to be involved based on the DNN/S-NSSAI for the AF session according to the SLA.

When the NEF interfaces directly with the PCF, the NEF shall transfer the received QoS requirements to the PCF in the Npcf_PolicyAuthorization service and subscribe to PCF event "QOS_NOTIF" in the Npcf_PolicyAuthorization service. When the NEF receives the notification of PCF event "QOS_NOTIF", it shall notify the AF with "QOS_GUARANTEED" event or with the "QOS_NOT_GUARANTEED" event and the currently applied QoS reference if received. When the NEF receives the notification of PCF event "SUCCESSFUL_RESOURCES_ALLOCATION", it shall notify the AF the event together with the currently applied QoS reference if received.

- If the "eNB_5G" feature is supported, the AF may additionally subscribe the event(s) "ACCESS_TYPE_CHANGE" and/or "PLMN_CHG". If the NEF authorizes the AF request, the NEF shall subscribe the event(s) at the PCF by invoking the Npcf_PolicyAuthorization service operation.

4.4.10 Procedures for MSISDN-less Mobile Originated SMS

The procedures are used by the NEF to send the MSISDN-less MO-SMS to the AF in 5GS are described in clause 4.4.14 of 3GPP TS 29.122 [4] with the following differences:

- description of the SCS/AS applies to the AF;
- description of the SCEF applies to the NEF; and
- the NEF shall interact with UDM by using Nudm_SubscriberDataManagement service (as defined in 3GPP TS 29.503 [17]) to retrieve the external identifier.

4.4.11 Procedures for Network Configuration Parameters Provisioning

The procedures for network configuration parameters provisioning as described in clause 4.4.12 of 3GPP TS 29.122 [4] shall be applicable in 5GS with the following differences:

- description of the SCS/AS applies to the AF;
- description of the SCEF applies to the NEF;
- description of the HSS applies to the UDM;
- the NEF shall interact with the UDM by using Nudm_ParameterProvision service as specified in 3GPP TS 29.503 [17]; and
- if the "UEId_retrieval" feature defined in clause 5.13.4 of 3GPP TS 29.122 [4] is supported, in order to support the AF specific UE ID retrieval:
 - 1) the AF may request AF specific UE ID retrieval for an individual UE, by providing the UE's IP address in the "ueIpAddr" attribute or the UE's MAC address in the "ueMacAddr" attribute within the NpConfiguration data type;
 - 2) the AF may also provide the DNN, within the "dnn" attribute, and/or the S-NSSAI, within the "snssai" attribute, within the NpConfiguration data type;
 - 3) upon reception of the corresponding request message from the AF:
 - if the AF's request is not authorized, the NEF shall respond to the AF with a "403 Forbidden" status code with the response body including the ProblemDetails data structure containing the "cause" attribute set to the "REQUEST_NOT_AUTHORIZED" application error indicating AF authorisation failure; and
 - if the AF's request is authorized by the NEF, then if the DNN and/or S-NSSAI information is not available in the request, the NEF shall determine the corresponding DNN and/or S-NSSAI information based on the received requesting AF Identifier, and if provided, the MTC Provider Information;
 - 4) the NEF shall then interact with the BSF with the UE address and IP domain (if the UE IPv4 address is provided), DNN and/or S-NSSAI to retrieve the session binding information of the UE by invoking the Nbsf_Management_Discovery service operation as described in 3GPP TS 29.521 [9];
 - 5) if the NEF receives an error response from the BSF, the NEF shall respond to the AF with a proper error status code. If the NEF received from the BSF an error response including a "ProblemDetails" data structure

with the "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error. If no SUPI matching the provided UE information is returned by the BSF, the NEF shall respond to the AF with a "404 Not Found" status code with the response body including a ProblemDetails data structure containing the "cause" attribute set to the "UE_NOT_FOUND" application error to indicate that the requested UE address is not found;

- 6) upon success and a SUPI is returned by the BSF, the NEF shall interact with the UDM to retrieve the AF specific UE Identifier using the received SUPI and at least one of the Application Port ID, MTC Provider Information or AF Identifier information by invoking Nudm_SDM_Get service as described in clause 5.2.2.2 of 3GPP TS 29.503 [17];
- 7) upon success, the UDM responds to the NEF with an AF specific UE Identifier represented as an External Identifier for the UE which is uniquely associated with the MTC provider Information and/or AF Identifier. The NEF shall then respond to the AF with the received information, i.e. the AF specific UE Identifier represented as an External Identifier that was received from the UDM;
- 8) if the NEF receives an error response from the UDM, the NEF shall respond to the AF with a proper error status code. If the NEF received from the UDM an error response including a "ProblemDetails" data structure with the "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error. If the UDM indicates that the requested UE Identifier is not available in the subscription data, the NEF shall respond to the AF with a "404 Not Found" error status code with the response body including a ProblemDetails data structure containing the "cause" attribute set to the "UE_ID_NOT_AVAILABLE" application error to indicate that the AF specific UE ID is not available.

NOTE: The case where UE IP address provided by the AF to the NEF corresponds to an IP address that has been NATed (Network and Port Address Translation) is not supported in this release.

4.4.12 Procedures for Non-IP data delivery

4.4.12.1 General

The procedures are used by the NEF to send/receive the non-IP data to/from the AF. It comprises NIDD configuration and NIDD delivery.

The NIDD configuration may be triggered by the NEF or the AF. If it is triggered by the NEF, the NiddConfigurationTrigger API described in clause 5.5 is used and the procedure is described in clause 4.4.12.2.

4.4.12.2 NIDD configuration Triggered by the NEF

If the NEF receives a NIDD connection establishment request from the SMF and if there is no NIDD configuration for the UE, the NEF may send a NIDD configuration trigger to the AF. The NEF determines the destination URI by local configuration. The NEF shall send to the determined destination URL an HTTP POST request that shall include a NiddConfigurationTrigger data type with:

- the NEF identifier,
- the AF identifier, and
- GPSI as UE identity.

The AF shall acknowledge the HTTP POST request with an HTTP 200 OK response. Then the AF may start NIDD configuration procedure as described in clause 4.4.12.3.

4.4.12.3 NIDD configuration triggered by the AF and NIDD delivery

The procedures for NIDD configuration triggered by the AF and NIDD delivery are described in clause 4.4.5 of 3GPP TS 29.122 [4] with the following differences:

- description of the SCS/AS applies to the AF;
- description of the SCEF applies to the NEF;
- description of the MME/SGSN applies to the SMF;

- for the connection establishment, the interaction between the NEF and the SMF shall use Nnef_SMContext service as specified in 3GPP TS 29.541 [24];
- for MO NIDD, the interaction between the SMF and the NEF shall use Nnef_SMContext service as specified in 3GPP TS 29.541 [24]; and
- for MT NIDD, the interaction between the SMF and the NEF shall use Nsmf_NIDD service as specified in 3GPP TS 29.542 [25].

4.4.13 Procedures for RACS Parameter Provisioning

The procedures for RACS parameter provisioning as described in clause 4.4.15 of 3GPP TS 29.122 [4] shall be applicable in 5G with the following differences:

- description of the SCS/AS applies to the AF;
- description of the SCEF applies to the NEF.

4.4.14 Procedures for analytics information exposure

4.4.14.1 Subscription/unsubscription to notification of analytics information

The procedures are used by the AF to subscribe/unsubscribe to retrieve analytics information via NEF, and are used by the NEF to notify the AF about the requested analytics information as described in 3GPP TS 23.288 [29].

In order to subscribe to retrieve analytics information, the AF shall send an HTTP POST message to the NEF to the resource "Analytics Exposure Subscriptions", the HTTP POST request message body shall include the AnalyticsExposureSubsc data structure that shall include:

- the URI where to receive the requested notifications as "notifUri" attribute;
- the Notification Correlation Identifier assigned by the NF service consumer for the requested notifications as "notifId" attribute; and
- a description of the subscribed events as "analyEventsSubs" attribute that shall include for each event:
 - 1) an event identifier as "analyEvent" attribute.

The AnalyticsExposureSubsc data structure may include:

- event reporting requirement information as "analyRepInfo" attribute, which applies for all events in a subscription and may contain the following attributes:
 - 1) event notification method (periodic, one time, on event detection) as "notifMethod" attribute;
 - 2) maximum Number of Reports as "maxReportNbr" attribute;
 - 3) monitoring Duration as "monDur" attribute;
 - 4) repetition period for periodic reporting as "repPeriod" attribute;
 - 5) immediate reporting indication as "immRep" attribute;
 - 6) sampling ratio as "sampRatio" attribute;
 - 7) group reporting guard time as "grpRepTime" attribute;
 - 8) partitioning criteria for partitioning the impacted UEs before performing sampling as "partitionCriteria" attribute if the "EneNA" feature is supported; and
 - 9) a notification flag (used for muting and retrieving notifications) as "notifFlag" attribute if the "EneNA" feature is supported.

Each AnalyticsEventSubsc data structure may include:

- event specific filters via the "analyEventFilter" attribute; and
- the indication of the UEs to which the subscription applies via "tgtUe" attribute, which if provided shall include one of the following attributes:
 - 1) identification of an individual UE via a "gpsi" attribute;
 - 2) identification of a group of UE(s) via a "exterGroupId" attribute; or
 - 3) identification of any UE via the "anyUeInd" attribute.

Upon receipt of the HTTP POST request from the AF, if the AF is authorized, the NEF shall interact with the UDM by using Nudm_SubscriberDataManagement service as defined in 3GPP TS 29.503 [17] to translate the GPSI or external group identifier into the corresponding SUPI or internal group identifier. After receiving a successful response from the UDM, the NEF may perform further mappings and translations (e.g. map application identifiers to DNN and S-NSSAI information, or translate attributes of data type NetworkAreaInfo to attributes of data type LocationArea5G) and it shall interact with the NWDAF to subscribe to the subscription to the analytics information by using the NnwdafeventsSubscription service as defined in 3GPP TS 29.520 [27]. If the NEF receives an error response from the NWDAF, the NEF shall not create the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

In order to update an existing analytics exposure subscription, the AF shall send an HTTP PUT message to the NEF to the resource "Individual Analytics Exposure Subscription" requesting to change the subscription.

In order to delete an existing analytics exposure subscription, the AF shall send an HTTP DELETE message to the NEF to the resource "Individual Analytics Exposure Subscription".

Upon receipt of the HTTP PUT or DELETE request from the AF, if the AF is authorized, the NEF may perform further mappings and translations (e.g. map application identifiers to DNN and S-NSSAI information, or translate attributes of data type LocationArea5G to attributes of data type NetworkAreaInfo as required by the data model) and it shall interact with the NWDAF to modify or cancel the subscription to the analytics information by using the NnwdafeventsSubscription service as defined in 3GPP TS 29.520 [27]. If the NEF receives an error response from the NWDAF, the NEF shall not update or delete the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

After receiving a successful response from the NWDAF, the NEF shall:

- for the HTTP POST request, create a resource "Individual Analytics Exposure Subscription" which represents the analytics exposure subscription, addressed by a URI that contains the AF Identifier and an NEF-created subscription identifier, and shall respond to the AF with a 201 Created status code, including a Location header field containing the URI for the created resource. The AF shall use the URI received in the Location header in subsequent requests to the NEF to refer to this analytics exposure subscription. If not all the requested analytics events in the subscription are accepted, then the NEF may include the "failEventReports" attribute indicating the event(s) for which the subscription failed and the associated reason(s);
- for the HTTP PUT request, update a resource "Individual Analytics Exposure Subscription" which represents the analytics exposure subscription, and shall respond to the AF with a 200 OK or 204 No Content status code. When responding with a 200 OK status code, if not all the requested analytics events in the subscription are modified successfully, then the NEF may include the "failEventReports" attribute indicating the event(s) for which the modification failed and the associated reason(s); and
- for the HTTP DELETE request, remove all properties of the resource and delete the corresponding active resource "Individual Analytics Exposure Subscription" which represents the analytics exposure subscription, then shall respond to the AF with a 204 No Content status code.

If the immediate reporting indication in the "immRep" attribute within the "analyRepInfo" attribute sets to true during the HTTP POST or PUT request, the NEF shall also include the reports of the events subscribed, if available, in the HTTP POST or PUT response to the AF.

If the NEF receives an analytics information notification from the NWDAF indicating that the subscribed analytics event has been detected, the NEF may perform further mappings and translations (e.g. translate attributes of data type NetworkAreaInfo to attributes of data type LocationArea5G as required by the data model), it may determine based on

local configuration to hide from the Untrusted AF network internal information (e.g. DNN, S-NSSAI) which was included in the NWDAF notification, and it shall provide a notification by sending HTTP POST message that include the AnalyticsEventNotification data structure at least with the detected analytics event to the AF identified by the notification URI together with the notification correlation identifier received during creation/modification of the Individual Analytics Exposure Subscription. Upon receipt of the analytics event notification, the AF shall respond with a "204 No Content" status code to confirm the received notification.

When the "notifFlag" attribute is included during the creation of a subscription (HTTP POST request) and set to "DEACTIVATE", the NEF shall mute the event notification and store the available events.

When the "notifFlag" attribute is included during the update of a subscription (HTTP PUT request) and set to "DEACTIVATE", the NEF shall mute the event notification and store the available events; if it is set to the value "RETRIEVAL", the NEF shall send the stored events to the NF service consumer, mute the event notification again and store available events; if it is set to the value "ACTIVATE" and the event notifications are muted (due to a previously received "DEACTIVATE" value), the NWDAF shall unmute the event notification, i.e. start sending again notifications for available events.

4.4.14.2 Fetch analytics information

The procedures are used by the AF to fetch analytics information via NEF.

In order to fetch analytics information, the AF shall send an HTTP POST request message to the NEF targeting the custom operation URI "{apiRoot}/3gpp-analyticsexposure/v1/{afId}/fetch", the HTTP POST request message body shall include the AnalyticsRequest data structure that shall include:

- the identification of the analytics events, encoded within the "analyEvent" attribute;

and may include:

- the description of the analytics reporting information, encoded within the "analyRep" attribute;
- an event filter, encoded within the "analyEventFilter" attribute.
- the indication of the UEs to which the analytics request applies via either:
 - a) the identification of an individual UE via the "gpsi" attribute;
 - b) the identification of a group of UE(s) via the "exterGroupId" attribute; or
 - c) the identification of any UE via the "anyUeInd" attribute.

Upon the reception of an HTTP POST request, if the AF is authorized, the NEF shall interact with the UDM by using Nudm_SubscriberDataManagement service as defined in 3GPP TS 29.503 [17] to translate the GPSI or external group identifier into the corresponding SUPI or internal group identifier. After receiving a successful response from the UDM, the NEF may perform further mappings and translations (e.g. map application identifiers to DNN and S-NSSAI information, or translate attributes of data type NetworkAreaInfo to attributes of data type LocationArea5G) and it shall interact with the NWDAF by using Nnwdaf_AnalyticsInfo service as defined in 3GPP TS 29.520 [27]. If the NEF receives an error response from the NWDAF, the NEF shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable. If a successful response including analytics information is received from the NWDAF, the NEF shall translate the network internal information to external information (e.g. SUPI to GPSI, Internal Group ID to External Group ID, attributes of data type NetworkAreaInfo to attributes of data type LocationArea5G), it may determine based on local configuration to hide from the Untrusted AF network internal information (e.g. DNN, S-NSSAI) which was included in the NWDAF response, and it shall send an HTTP POST response to the AF by including analytics information within the AnalyticsData data structure.

4.4.15 Procedures for 5G LAN Parameter Provisioning

4.4.15.1 General

The procedures are used by the AF to provision 5G LAN type service related parameters to the NEF. The following procedures support:

- Management of 5G Virtual Network group membership; and/or
- Management of 5G Virtual Network group data

4.4.15.2 Creation of a new subscription for 5G LAN parameter provisioning

In order to create a new subscription to provision 5G LAN related parameters, the AF shall initiate an HTTP POST request to the NEF for the "5GLAN Parameters Provision Subscriptions" resource. The body of the HTTP POST message shall include the 5G LAN service related parameters within the "5gLanParams" attribute.

Upon receipt of the corresponding HTTP POST message, if the AF is authorized by the NEF to provision the parameters, the NEF shall interact with the UDM to create a subscription at the UDM by using Nudm_ParameterProvision service as defined in 3GPP TS 29.503 [17]. If the request is accepted by the UDM and the UDM informs the NEF with a successful response, the NEF shall create a new subscription and assign a subscription identifier for the "Individual 5GLAN Parameters Provision Subscription" resource. Then the NEF shall send a HTTP "201 Created" response with 5GLanParametersProvision data structure as response body and a Location header field containing the URI of the created individual subscription resource.

4.4.15.3 Modification of an existing subscription for 5G LAN parameter provisioning

To modify an existing subscription to provision 5G LAN parameters, the AF shall initiate an HTTP PUT/PATCH request to the NEF for the "Individual 5GLAN Parameters Provision Subscription" resource. The body of the HTTP PUT message shall include the 5GLanParametersProvision data type as defined in clause 5.7.2.3.2. The body of the HTTP PATCH message shall include the 5GLanParametersProvisionPatch data as defined in clause 5.7.2.3.5. The External Group Identifier, DNN, S-NSSAI and PDU session type(s) within the "5gLanParams" attribute shall not be updated/modified.

Upon reception of the corresponding HTTP PUT/PATCH message, if the AF is authorized by the NEF to provision the parameters, the NEF shall interact with the UDM to modify an existing subscription at the UDM by using Nudm_ParameterProvision service as defined in 3GPP TS 29.503 [17]. If the modification request is accepted by the UDM and the UDM informs the NEF with a successful response, the NEF shall update the existing subscription for the "Individual 5GLAN Parameters Provision Subscription" resource. Then the NEF shall send a HTTP response including "200 OK" status code with 5GLanParametersProvision data structure or "204 No Content" status code.

4.4.15.4 Deletion of an existing subscription for 5G LAN parameter provisioning

To delete an existing subscription to 5GLAN provision parameters, the AF shall initiate an HTTP DELETE request to the NEF for the "Individual 5GLAN Parameters Provision Subscription" resource.

Upon receipt of the corresponding HTTP DELETE message, if the AF is authorized, the NEF shall interact with the UDM to delete an existing parameters provision subscription at the UDM by using Nudm_ParameterProvision service as defined in 3GPP TS 29.503 [17]. If the request is accepted by the UDM and informs the NEF with a successful response, the NEF shall delete the existing subscription for the "Individual 5GLAN Parameters Provision Subscription" resource. Then the NEF shall send a HTTP "204 No Content" response.

4.4.16 Procedures for applying BDT policy

In order to create a resource for the applying a previously negotiated Background Data Transfer Policy to a UE or a Group of UEs, the AF shall send an HTTP POST message to the NEF to the resource "Applied BDT Policy Subscriptions". The body of the HTTP POST message shall contain the external Group Identifier or external Identifier, and the Background Data Transfer Reference ID for a previously negotiated policy of a background data transfer.

Upon receipt of the HTTP POST request from the AF, if the AF is authorized, the NEF shall interact with the UDM by invoking the Nudm_SubscriberDataManagement service as described in 3GPP TS 29.503 [17] to retrieve the SUPI or Internal Group Identifier.

In order to update an existing applied BDT policy subscription, the AF shall send an HTTP PATCH message to the resource "Individual Applied BDT Policy Subscription" requesting to change the applied BDT policy. The AF shall include in the body of the HTTP PATCH request the new Background Data Transfer Reference ID.

In order to delete an existing applied BDT policy subscription, the AF shall send an HTTP DELETE message to the NEF to the resource "Individual Applied BDT Policy Subscription".

The NEF shall interact with the UDR by invoking the Nudr_DataRepository service as described in 3GPP TS 29.504 [20], if the NEF receives an error response from the UDR, the NEF shall not create, update or delete the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

After receiving a successful response from the UDR, the NEF shall:

- for the HTTP POST request, create a resource "Individual Applied BDT Policy Subscription" addressed by a URI that contains the AF Identifier and an NEF-created subscription identifier, and shall respond to the AF with a "201 Created" status code, including a Location header field containing the URI of the created resource. The AF shall use the URI received in the Location header in subsequent requests to the NEF to refer to this resource;
- for the HTTP PATCH request, update a resource "Individual Applied BDT Policy Subscription" which represents the applied BDT policy subscription, and shall respond to the AF with a "200 OK" or "204 No Content" status code; and
- for the HTTP DELETE request, delete the corresponding active resource "Individual Applied BDT Policy Subscription", and shall respond to the AF with a "204 No Content" status code.

4.4.17 Procedures for Enhanced Coverage Restriction Control

The procedures for network configuration parameters provisioning as described in clause 4.4.11 of 3GPP TS 29.122 [4] shall be applicable in 5GS with the following differences:

- description of the SCS/AS applies to the AF;
- description of the SCEF applies to the NEF;
- description of the HSS applies to the UDM; and
- upon receipt of HTTP POST request from the AF to query the current status of enhanced coverage restriction, the NEF shall interact with the UDM by using the Nudm_SubscriberDataManagement service as specified in 3GPP TS 29.503 [17].
- upon receipt of HTTP POST request from the AF to configure the enhanced coverage restriction, the NEF shall interact with the UDM by using the Nudm_ParameterProvision service as specified in 3GPP TS 29.503 [17].
- if the ECR_WB_5G feature is supported, in order to configure the enhanced coverage restriction for WB UE, the HTTP POST request message shall include the WB mode related enhanced coverage restriction information via the "ecrDataWbs" attribute for the WB UE.

4.4.18 Procedures for IPTV Configuration

The procedures are used by the AF to authorize the request and forward the request for IPTV configuration information via NEF.

In order to configure IPTV information, the AF shall send an HTTP POST message to the NEF to the resource "IPTV Configurations", the HTTP POST request message body shall include the IptvConfigData data structure that shall include:

- indication of the UEs to which the subscription applies via:
 - a) identification of an individual UE via a "gpsi" attribute; or
 - b) identification of a group of UE(s) via a "exterGroupId" attribute;
- an application identifier as "appId" attribute; and
- a list of Multicast Access Control as "multiAccCtrls" attribute;

and may include:

- an DNN as "dnn" attribute;

- an S-NSSAI as "snssai" attribute; and
- MTC Provider Information as "mtcProviderId" attribute.

NOTE: The NEF can check the received MTC Provider Id information and reject the IPTV configuration request upon failure checking result.

In order to update an existing individual IPTV configuration, the AF shall send an HTTP PUT or HTTP PATCH message to the NEF to the resource "Individual IPTV Configuration" requesting to change the subscription. The External Group Identifier, GPSI, DNN, S-NSSAI and Application Identifier shall remain unchanged from previous values in the HTTP PUT message.

In order to delete an existing individual IPTV configuration, the AF shall send an HTTP DELETE message to the NEF to the resource "Individual IPTV Configuration".

Upon receipt of the HTTP request from the AF, if the AF is authorized, the NEF shall interact with the UDM by invoking the Nudm_SubscriberDataManagement service as described in 3GPP TS 29.503 [17] to retrieve the SUPI or Internal Group Identifier. Then the NEF shall interact with the UDR to create, update or delete the IPTV configuration by using the Nudr_DataRepository service as defined in 3GPP TS 29.519 [23]. If the NEF receives an error response from the UDR, the NEF shall not create, update or delete the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

After receiving a successful response from the UDR, the NEF shall:

- for the HTTP POST request, create a resource "Individual IPTV Configuration" which represents the IPTV configuration request, addressed by a URI that contains the AF Identifier and an NEF-created configuration identifier, and shall respond to the AF with a 201 Created status code, including a Location header field containing the URI for the created resource. The AF shall use the URI received in the Location header in subsequent requests to the NEF to refer to this IPTV configuration.
- for the HTTP PUT or HTTP PATCH request, update a resource "Individual IPTV Configuration" which represents the IPTV configuration, and shall responds to the AF with a 200 OK or 204 No Content status code; and
- for the HTTP DELETE request, remove all properties of the resource and delete the corresponding active resource "Individual IPTV Configuration", then shall responds to the AF with a 204 No Content status code.

4.4.19 Procedures for Location Privacy Indication Parameters Provisioning

The procedures are used by the AF to provision Location Privacy Indication parameters to the NEF. The procedures are applicable for an individual UE or a group of UEs.

In order to provision Location Privacy Indication parameters, the AF shall initiate an HTTP POST request to the NEF for the "LPI Parameters Provisionings" resource. The body of the HTTP POST message shall include the Location Privacy Indication related parameters within the LpiParametersProvision data structure.

Upon receipt of the corresponding HTTP POST message, if the AF is authorized by the NEF to provision the parameters, the NEF shall interact with the UDM to create a resource at the UDM by using Nudm_ParameterProvision service as defined in 3GPP TS 29.503 [17]. If the request is accepted by the UDM and the UDM informs the NEF with a successful response, the NEF shall create a new resource and assign an identifier for the "Individual LPI Parameters Provisioning" resource. Then the NEF shall send a HTTP "201 Created" response with LpiParametersProvision data structure as response body and a Location header field containing the URI of the created individual resource.

In order to update an existing individual LPI Parameters Provisioning, the AF may send an HTTP PUT message to the resource "Individual LPI Parameters Provisioning" requesting the NEF to change all properties in the existing resource. The body of the HTTP PUT request message shall include LpiParametersProvision data type as defined in clause 5.10.2.3.2. The External Group Identifier or GPSI shall remain unchanged from previous values.

If the "PatchUpdate" feature defined in clause 5.10.3 is supported, in order to partially modify an existing LPI Parameters Provisioning resource, the AF may send an HTTP PATCH request message to the NEF on the "Individual LPI Parameters Provisioning" resource, with the request body containing the LpiParametersProvisionPatch data structure including only the attributes that shall be updated.

Upon receipt of the corresponding HTTP PUT/PATCH request message, if the AF is authorized by the NEF to provision the parameters, the NEF shall interact with the UDM to modify an existing resource at the UDM by using Nudm_ParameterProvision service as defined in 3GPP TS 29.503 [17]. If the modification request is accepted by the UDM and the UDM informs the NEF with a successful response, the NEF shall update the existing resource for the "Individual LPI Parameters Provisioning" resource. Then the NEF shall send a HTTP response including "200 OK" status code with LpiParametersProvision data structure or "204 No Content" status code.

To delete an existing individual LPI Parameters Provisioning, the AF shall initiate an HTTP DELETE request to the NEF for the "Individual LPI Parameters Provisioning" resource.

Upon receipt of the corresponding HTTP DELETE message, if the AF is authorized, the NEF shall interact with the UDM to delete an existing LPI Parameters Provisioning at the UDM by using Nudm_ParameterProvision service as defined in 3GPP TS 29.503 [17]. If the request is accepted by the UDM, the NEF shall delete the existing resource for the "Individual LPI Parameters Provisioning" resource. Then the NEF shall send a HTTP "204 No Content" response.

4.4.20 Procedures for service specific parameter provisioning

These procedures are used by an AF to provide service specific parameters to the 5G system via the NEF.

In order to provision service specific parameters to the 5G system, the AF shall send an HTTP POST message to the NEF targeting the resource "Service Parameter Subscriptions", the HTTP POST request message body shall include the ServiceParameterData data structure that shall include:

- service description via:
 - a) a combination of DNN and S-NSSAI within the "dnn" attribute and the "snssai" attribute respectively;
 - b) an AF Service Identifier within the "afServiceId" attribute; or
 - c) an application identifier within the "appId" attribute;

NOTE: When the feature "AfGuideURSP" is supported, the DNN, S-NSSAI and/or Application Identifier information can be provided in the "urspGuidance" attribute, hence only the "afServiceId" attribute needs to be included for providing guidance for URSP determination.

- indication of the UEs to which the subscription applies via:
 - a) identification of an individual UE within the "gpsi" attribute;
 - b) an IPv4 address of the UE within the "ueIpv4" attribute;
 - c) an IPv6 address of the UE within the "ueIpv6" attribute;
 - d) a MAC address of the UE within the "ueMac" attribute;
 - e) an identification of a group of UE(s) within the "externalGroupId" attribute; or
 - f) an identification of any UE within the "anyUeInd" attribute; and
- service parameters for at least one of the following:
 - 1)V2X service parameters via:
 - a) configuration parameters for V2X communications over PC5 within the "paramOverPc5" attribute; and
 - b) configuration parameters for V2X communications over Uu within the "paramOverUu" attribute;
 - 2)if the "ProSe" feature is supported, 5G ProSe service parameters via:
 - a) configuration parameters for 5G ProSe direct discovery within the "paramForProSeDd" attribute;
 - b) configuration parameters for 5G ProSe direct communication within the "paramForProSeDc" attribute; and

- c) configuration parameters for 5G ProSe UE-to-network relay, including configuration parameters for 5G ProSe UE-to-network relay UE within the "paramForProSeU2NRelUE" attribute and configuration parameters for 5G ProSe remote UE within the "ParamForProSeRemUE" attribute; and

3) if the "AfGuideURSP" feature is supported, URSP service parameters via:

- a) contents for the AF guidance on URSP within the "urspGuidance" attribute, which shall include one or more URSP rule requests. Each URSP rule request may include a traffic descriptor within the "trafficDesc" attribute, a relative precedence within the "relatPrecedence" attribute and/or one or more route selection parameter sets within the "routeSelParamSets" attribute. Each route selection parameter set may include a precedence value within the "precedence" attribute, a DNN within the "dnn" attribute, an S-NSSAI within the "snssai" attribute, and a spatial validity condition within the "spatialValidity" attribute. If the request contains only one route selection parameter set, each of the optional attributes "dnn", "snssai", "precedence", and "spatialValidity" that is missing from the request may be complemented by the NEF based on local configuration for the provided AF service identifier. It is up to the NEF to transform the information of the "spatialValidity" attribute into a list of TAIs;

and may include:

- if the "AfNotifications" feature is supported:
 - a) subscription to event notification of the outcome related to invocation of service parameter provisioning within the "subNotifEvents" attribute; and
 - b) notification URI within the "notificationDestination" attribute.

In order to update an existing service parameter subscription, the AF shall send an HTTP PUT or HTTP PATCH message to the NEF targeting the resource "Individual Service Parameter Subscription" and requesting to change the subscription.

In order to delete an existing service parameter subscription, the AF shall send an HTTP DELETE message to the NEF targeting the resource "Individual Service Parameter Subscription".

Upon receipt of the HTTP request from the AF, and if the AF is authorized, the NEF shall interact with the UDM by invoking the Nudm_SubscriberDataManagement service as described in 3GPP TS 29.503 [17] to retrieve the SUPI or Internal Group Identifier. NEF may, based on local configuration, complement missing service parameters. Additionally, based on operator's local policy, NEF may support service specific authorization as described in clause 4.15.6.10 in 3GPP TS 23.502 [2]. Then the NEF shall interact with the UDR to create, update or delete the associated service parameters by using the Nudr_DataRepository service as defined in 3GPP TS 29.519 [23]. If information related to AfNotifications feature are received from the AF, the NEF shall also include the required information (e.g. "policDelivNotifUri" and "policDelivNotifCorreId" attributes in 3GPP TS 29.519 [23]) in UDR data creation if the NEF supports the DeliveryOutcome feature (as described in 3GPP TS 29.504 [4]). If the NEF receives an error response from the UDR, the NEF shall not create, update or delete the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

After receiving a successful response from the UDR, the NEF shall:

- for an HTTP POST request, create an "Individual Service Parameter Subscription" resource which represents the Service Parameter provisioning request, addressed by a URI that contains the AF Identifier and a NEF-created configuration identifier, and shall respond to the AF with a 201 Created status code, including a Location header field containing the URI for the created resource. The AF shall use the URI received in the Location header in subsequent requests to the NEF to refer to this Service Parameter Subscription;
- for an HTTP PUT or HTTP PATCH request, update the "Individual Service Parameter Subscription" resource which represents the service parameter provisioning request, and respond to the AF with a 200 OK or 204 No Content status code; and
- for an HTTP DELETE request, remove all properties of the resource and delete the corresponding active "Individual Service Parameter Subscription" resource, then respond to the AF with a 204 No Content status code.

When the NEF receives the Service Specific Authorization Update information from the UDM by Nudm_ServiceSpecificAuthorization_UpdateNotify service operation defined in 3GPP TS 29.503 [17], if the

authorization is revoked, the NEF shall provide a notification to AF by sending HTTP POST message that include the one or more AfNotification data structure(s). Upon receipt of the notification, the AF shall respond with a "204 No Content" status code to confirm the received notification.

When the NEF receives the notification of the outcome of invocation related to AF provisioned service parameters from the PCF by Npcf_EventExposure_Notify service operation defined in 3GPP TS 29.523 [22], the NEF shall determine the corresponding service parameter subscription and provide a notification to AF by sending HTTP POST message that include the AfNotification data structure. Upon receipt of the notification, the AF shall respond with a "204 No Content" status code to confirm the received notification.

4.4.21 Procedures for ACS configuration parameter provisioning

The procedures are used by the AF to provide ACS configuration information to 5G system via NEF.

In order to provision the ACS configuration information, the AF shall send an HTTP POST message to the NEF to the resource "ACS Configuration Subscriptions", the HTTP POST message shall include AcsConfigurationData data structure as request body. The AcsConfigurationData data structure shall include:

- the URL of the ACS or the address of the ACS within the "acsInfo" attribute; and
- indication of the UEs to which the subscription applies via:
 - a) identification of an individual UE via a "gpsi" attribute; or
 - b) identification of a group of UE(s) via a "exterGroupId" attribute.

In order to update an existing ACS configuration subscription, the AF shall send an HTTP PUT message to the NEF to the resource "Individual ACS Configuration Subscription" requesting to change the subscription. The body of the HTTP PUT request message shall include AcsConfigurationData data type. The External Group Identifier or GPSI shall remain unchanged from previous values.

If the "PatchUpdate" feature defined in clause 5.12.3 is supported, in order to partially modify an existing ACS Configuration subscription, the AF shall send an HTTP PATCH request message to the NEF on the "Individual ACS Configuration Subscription" resource, with the request body containing the AcsConfigurationDataPatch data structure including only the attributes that shall be modified.

In order to delete an existing ACS configuration subscription, the AF shall send an HTTP DELETE message to the NEF to the resource "Individual ACS configuration Subscription".

Upon receipt of the corresponding HTTP message, if the AF is authorized by the NEF to provision the parameters, the NEF shall interact with the UDM to create a subscription at the UDM by using Nudm_ParameterProvision service as defined in 3GPP TS 29.503 [17].

After receiving a successful response from the UDM, the NEF shall,

- for the HTTP POST request, create a resource "Individual ACS Configuration Subscription" which represents the ACS configuration parameter provisioning request, addressed by a URI that contains the AF Identifier and an NEF-created configuration identifier, and shall respond to the AF with a 201 Created status code, including a Location header field containing the URI for the created resource. The AF shall use the URI received in the Location header in subsequent requests to the NEF to refer to this ACS Configuration Subscription.
- for the HTTP PUT/PATCH request, update/modify the concerned "Individual ACS Configuration Subscription" resource which represents the ACS configuration, and shall responds to the AF with an HTTP "200 OK" or an HTTP "204 No Content" status code.
- for the HTTP DELETE request, remove all properties of the resource and delete the corresponding active resource "Individual ACS Configuration Subscription", then shall responds to the AF with a 204 No Content status code.

4.4.22 Procedures for Mobile Originated Location Request

4.4.22.1 General

The procedure is used by NEF to transfer the updated UE location information to AF. The following procedure support:

- Notify the AF of the updated UE location information as described in clause 6.2 of 3GPP TS 23.273 [36];

4.4.22.2 Location Update Notification triggered by UE

In order to notify the AF of the updated UE location information received from GMLC, the NEF shall initiate an HTTP POST request to the AF. The body of the HTTP POST message shall include the location information related to UE MO-LR within the LocUpdateData data structure.

Upon receipt of the corresponding HTTP POST message, if the AF cannot handle the location estimate of the UE, e.g. the UE does not register to the AF, the AF shall respond to the NEF with an error code. Otherwise, the AF shall handle the location estimate according to the Service Identity if provided, and send a HTTP response including "200 OK" status code with LocUpdateDataReply data structure.

4.4.23 Procedures for AKMA

4.4.23.1 General

The procedures support:

- request AKMA application key by the AF to the AAnF via the NEF as described in clause 6.3 of 3GPP TS 33.535 [37];

4.4.23.2 AKMA Application Key Request

In order to retrieve the AKMA application key, the AF shall send an HTTP POST request message to the resource URI "{apiRoot}/3gpp-akma/v1/retrieve". The HTTP POST request includes the identification of AF and an A-KID.

Upon receipt of the corresponding HTTP POST message from the AF, if the AF's request is authorized by the NEF, then the NEF shall interact with the AAnF to retrieve the AKMA application key by using Naanf_AKMA service as defined in 3GPP TS 29.535 [38]. After receiving a successful response from the AAnF, the NEF shall respond to the AF with a 200 OK status code, including a K_{AF} and the expiration time of the K_{AF} , and if "anonInd" attribute contained in AkmaAfKeyRequest data type is not set to "true" in the incoming request, optionally the GPSI (external ID) which may be translated from the SUPI received from the AAnF. The SUPI shall not be included in the response to the external AF. If the NEF receives an error response from the AAnF, the NEF shall respond to the AF with a proper error status code.

If the NEF receives a response from the AAnF with an HTTP "403 Forbidden" status code and the response message body including a ProblemDetails data structure with the "cause" attribute set to the "K_AKMA_NOT_PRESENT" application error, then the NEF shall relay this response to the AF.

4.4.24 Procedures for Time Synchronization Exposure

4.4.24.0 General

Time synchronization exposure allows an AF to configure time synchronization in 5GS. For (g)PTP operation, the Time synchronization service allows an AF to subscribe to the UE and 5GC capabilities and availability for time synchronization service (as described in clause 4.4.24.1) and to configure the (g)PTP instance in 5GS as described in clause 4.4.24.2. For 5G access stratum based time distribution, the AF can influence the 5G access stratum time distribution as described in clause 4.4.24.3. The time synchronization exposure is provided by NEF that uses the service provided by TSCTSF. The AF that is part of operator's trust domain may invoke the services directly with TSCTSF.

NOTE: The AF can use either the procedure for configuring the (g)PTP instance in 5GS as described in clause 4.4.24.2 or the procedure for controlling the 5G access stratum time distribution as described in clause 4.4.24.3 for a particular UE. The procedures are not intended to be used in conjunction with each other by the AF. However, the (g)PTP instance activation, modification, and deactivation can influence the 5G access stratum time distribution for the UEs that are part of the impacted PTP instance.

4.4.24.1 Subscription and unsubscription to notification of Time Synchronization Capabilities

The procedures are used by the AF to subscribe to notifications and to explicitly cancel a previous subscription to notification of capabilities of the time synchronization service for a list of UE(s), a group of UEs or any UE using a DNN/S-NSSAI combination via the NEF.

In order to subscribe to the notification of capabilities of UE and 5GC, and availability for the time synchronization service, the AF shall send an HTTP POST message to the NEF to the customized operation URI "{apiRoot}/3gpp-time-sync/v1/{afId}/subscriptions". The HTTP POST request message body shall include the TimeSyncExposureSubsc data structure that shall include:

- one of the indication of the UEs to which the time synchronization capabilities is requested via:
 - 1) identification of a list of individual UEs within a "gpsis" attribute;
 - 2) indication of any UE within the "anyUeInd" attribute if DNN and S-NSSAI are provisioned; or
 - 3) identification of a group of UE(s) via a "exterGroupId" attribute.
- subscription to event(s) notification as "subscribedEvents" attribute when the NF service consumer needs to subscribe to notifications;
- notification URI within the "subsNotifUri" attribute; and
- notification correlation Id within the "subsNotifId" attribute;

and may include:

- either the DNN within the "dnn" attribute and the "snssai" attribute or the AF Service Identifier within the "afServiceId" attribute;
- the requested event filter(s) within the "eventFilters" attribute;
- notification methods within the "notifMethod" attribute;
- maximum number of reports within the "maxReportNbr" attribute;
- expiry time within the "expiry" attribute; and
- report period within the "repPeriod" attribute.

Upon the reception of an HTTP POST request, if the AF is authorized, the NEF shall select a TSCTSF based on the local configuration or discover the TSCTSF via Nnrf_NFDiscovery service as defined in 3GPP TS 29.510 [57] for a DNN/S-NSSAI combination, if not configured. If the DNN and the S-NSSAI is omitted in the AF request, prior the TSCTSF discovery the NEF shall determine the corresponding DNN and S-NSSAI based on the received AF Service Identifier. After the NEF obtains the TSCTSF, the NEF shall invoke the Ntsctsf_TimeSynchronization_CapsSubscribe request service operation as defined in clause 5.2.2.2.2 of 3GPP TS 29.565 [50] to the selected TSCTSF. If the NEF receives an error response from the TSCTSF, the NEF shall not create the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

NOTE: It is assumed that there is only one TSCTSF set for a given DNN/S-NSSAI in this release of the specification.

After receiving a successful response from the TSCTSF, the NEF shall create an "Individual Time Synchronization Exposure Subscription" resource which represents the time synchronization exposure subscription request, addressed by a URI that contains the AF Identifier and a NEF-created configuration identifier, and shall respond to the AF with a 201 Created status code, including a Location header field containing the URI for the created resource. The AF shall use the URI received in the Location header in subsequent requests to the NEF to refer to this "Individual Time Synchronization Exposure Subscription".

In order to update an existing subscription, the AF shall send an HTTP PUT message to the NEF targeting the resource "Individual Time Synchronization Exposure Subscription". The body of the HTTP PUT request message shall include the TimeSyncExposureSubsc data type. Upon receipt of the corresponding HTTP PUT message, if the AF is authorized by the NEF, the NEF shall interact with the TSCTSF by invoking Ntsctsf_TimeSynchronization_CapsSubscribe request service operation as defined in clause 5.2.2.2.3 of 3GPP TS 29.565 [50]. After receiving a successful response from the TSCTSF, the NEF shall update a resource "Individual Time Synchronization Exposure Subscription" which represents the exposure subscription, and responds to the AF with a 200 OK with TimeSyncExposureSubsc data structure or 204 No Content status code.

When the NEF receives the notification of the capabilities of the time synchronization service from the TSCTSF as defined in clause 5.2.2.4.2 of 3GPP TS 29.565 [50], the NEF shall provide a notification to AF by sending HTTP POST message that includes the TimeSyncExposureSubsNotif data structure in the request body. Upon receipt of the notification, the AF shall respond with a "204 No Content" status code to confirm the received notification.

In order to delete an existing subscription, the AF shall send an HTTP DELETE message to the NEF targeting the resource "Individual Time Synchronization Exposure Subscription". The NEF shall interact with the TSCTSF by invoking the Ntsctsf_TimeSynchronization_CapsUnsubscribe service operation as defined in clause 5.2.2.3.2 of 3GPP TS 29.565 [50] and delete the corresponding active "Individual Time Synchronization Exposure Subscription" resource, then respond to the AF with a 204 No Content status code.

4.4.24.2 Time Synchronization Exposure Configuration

The procedures are used by the AF to activate, modify or deactivate the (g)PTP instances by performing the time synchronization configuration at the NEF.

In order to configure the time synchronization parameters, the AF shall initiate an HTTP POST request to the NEF for the "Time Synchronization Exposure Configurations" resource. The body of the HTTP POST message shall include the Time Synchronization related parameters within the TimeSyncExposureConfig data structure.

Upon receipt of the corresponding HTTP POST message and the request is authorized by the NEF, the NEF invokes the Ntsctsf_TimeSynchronization_ConfigCreate service operation with the corresponding TSCTSF as defined in 3GPP TS 29.565 [50]. After receiving a successful response from the TSCTSF, the NEF shall create a new resource and assign an identifier for the "Individual Time Synchronization Exposure Configuration" resource. Then the NEF shall send a HTTP "201 Created" response with TimeSyncExposureConfig data structure as response body and a Location header field containing the URI of the created individual resource.

In order to update an existing Individual Time Synchronization Exposure Configuration, the AF may send an HTTP PUT message to the resource "Individual Time Synchronization Exposure Configuration" requesting the NEF to change all properties in the existing resource. The body of the HTTP PUT request message shall include TimeSyncExposureConfig data type as defined in clause 5.15.4.3.6. The user plane node Id shall remain unchanged from previous values.

Upon receipt of the corresponding HTTP PUT message and the request is authorized by the NEF, the NEF shall interact with the TSCTSF to modify an existing resource at the TSCTSF by using Ntsctsf_TimeSynchronization_ConfigUpdate service operation as defined in 3GPP TS 29.565 [50]. If the modification request is accepted by the TSCTSF and the TSCTSF informs the NEF with a successful response, the NEF shall update the existing resource for the "Individual Time Synchronization Exposure Configuration" resource. Then the NEF shall send a HTTP response including "200 OK" status code with TimeSyncExposureConfig data structure or "204 No Content" status code.

When the NEF receives the notification of the current state of time synchronization service configuration from the TSCTSF by Ntsctsf_TimeSynchronization_ConfigUpdateNotify service operation defined in 3GPP TS 29.565 [50], the NEF shall provide a notification to AF by sending HTTP POST message that include the TimeSyncExposureConfigNotif data structure in the request body. Upon receipt of the notification, the AF shall respond with a "204 No Content" status code to confirm the received notification.

To delete an existing "Individual Time Synchronization Exposure Configuration", the AF shall initiate an HTTP DELETE request to the NEF for the "Individual Time Synchronization Exposure Subscription" resource.

Upon receipt of the corresponding HTTP DELETE message, if the AF is authorized, the NEF shall interact with the TSCTSF to delete an existing Individual Time Synchronization Exposure Configuration at the TSCTSF by using Ntsctsf_TimeSynchronization_ConfigDelete service operation as defined in 3GPP TS 29.565 [50]. If the request is accepted by the TSCTSF, the NEF shall delete the existing resource for the "Individual Time Synchronization Exposure Configuration" resource. Then the NEF shall send a HTTP "204 No Content" response.

4.4.24.3 Management of 5G access stratum time distribution

The procedures are used by the AF to activate, update or delete the 5G access stratum time distribution for one UE or group of UEs.

In order to configure the 5G access stratum time distribution parameters, the AF shall initiate an HTTP POST request to the NEF for the "ASTI Configurations" resource. The body of the HTTP POST message shall include the 5G access stratum time distribution parameters within the AccessTimeDistributionData data structure as defined in clause 5.22.4.3.2.

Upon receipt of the corresponding HTTP POST message and the request is authorized by the NEF, the NEF shall select a TSCTSF based on the local configuration or discover the TSCTSF via Nnrf_NFDIScovery service as defined in 3GPP TS 29.510 [57] for the GPSI or external group identifier, if not configured. After the NEF obtains the TSCTSF, the NEF invokes the Ntsctsf_ASTI_Create service operation with the corresponding TSCTSF, if available, as defined in 3GPP TS 29.565 [50]. After receiving a successful response from the TSCTSF, the NEF shall create a new resource and assign an identifier for the "Individual ASTI Configuration" resource. Then the NEF shall send a HTTP "201 Created" response with AccessTimeDistributionData data structure as response body and a Location header field containing the URI of the created individual resource. If the NEF receives an error response from the TSCTSF, the NEF shall not create the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

In order to update an existing Individual ASTI Configuration, the AF may send an HTTP PUT message to the resource "Individual ASTI Configuration" requesting the NEF to change all properties in the existing resource. The body of the HTTP PUT request message shall include the AccessTimeDistributionData data type.

Upon receipt of the corresponding HTTP PUT message and the request is authorized by the NEF, the NEF shall interact with the TSCTSF to modify an existing resource at the TSCTSF by using Ntsctsf__ASTI_Update service operation as defined in 3GPP TS 29.565 [50]. If the modification request is accepted by the TSCTSF and the TSCTSF informs the NEF with a successful response, the NEF shall update the existing resource for the "Individual ASTI Configuration" resource. Then the NEF shall send a HTTP response including "200 OK" status response with AccessTimeDistributionData data structure or "204 No Content" status code. If the NEF receives an error code from the TSCTSF, the NEF shall not update the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

To delete an existing Individual ASTI Configuration, the AF shall initiate an HTTP DELETE request to the NEF for the "Individual ASTI Configuration" resource.

Upon receipt of the corresponding HTTP DELETE message, if the AF is authorized, the NEF shall interact with the TSCTSF to delete an existing Individual ASTI Configuration at the TSCTSF by using Ntsctsf_ASTI_Delete service operation as defined in 3GPP TS 29.565 [50]. If the request is accepted by the TSCTSF, the NEF shall delete the existing resource for the "Individual ASTI Configuration" resource. Then the NEF shall send a HTTP "204 No Content" response. If the NEF receives an error response from the TSCTSF, the NEF shall not delete the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

AF may request and query the status of the access stratum time distribution sending the HTTP POST request, "retrieve" custom operation, to the resource "ASTI Configurations". The body of the HTTP POST request message shall include the StatusRequestData data type as defined in clause 5.22.4.3.3.

Upon receipt of the corresponding HTTP POST message, if the AF is authorized, the NEF shall interact with the TSCTSF by using Ntsctsf_ASTI_Get service operation as defined in 3GPP TS 29.565 [50]. Upon receipt of response

from the TSCTSF, the NEF shall send a HTTP "200 OK" response with the StatusResponseData data structure as defined in clause 5.22.4.3.4 in the payload. If the NEF receives an error response from the TSCTSF, the NEF shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.25 Procedures for ECS address Provisioning

The procedures are used by the AF to provision ECS address(es) to the NEF. The procedures are applicable for an individual UE or a group of UEs.

In order to create an Individual ECS Address Provision Configuration resource, the AF shall initiate an HTTP POST request to the NEF for the "ECS Address Provision Configurations" resource. The body of the HTTP POST message shall include within the EcsAddressProvision data structure the ECS address(es) via the "ecsServerAddr" attribute, may include the spatial validity condition via the "spatialValidityCond" attribute and target of UE information via the "tgtUe" attribute. Upon receipt of the corresponding HTTP POST message, if the AF is authorized by the NEF to provision the ECS address(es), the NEF shall interact with the UDM to create a resource at the UDM by using Nudm_ParameterProvision service as defined in 3GPP TS 29.503 [17]. If the request is accepted by the UDM and the UDM informs the NEF with a successful response, the NEF shall create a new resource and assign an identifier for the "Individual ECS Address Provision Configuration" resource. Then the NEF shall send a HTTP "201 Created" response with EcsAddressProvision data structure as response body and a Location header field containing the URI of the created individual resource.

In order to update an existing Individual ECS Address Provision Configuration, the AF shall send an HTTP PUT message to the resource "Individual ECS Address Provision Configuration" requesting the NEF to change all properties in the existing resource. The body of the HTTP PUT request message shall include the EcsAddressProvision data type. Upon receipt of the corresponding HTTP PUT message, if the AF is authorized by the NEF to provision the ECS address(es), the NEF shall interact with the UDM to modify an existing resource at the UDM by using Nudm_ParameterProvision service as defined in 3GPP TS 29.503 [17]. If the modification request is accepted by the UDM and the UDM informs the NEF with a successful response, the NEF shall update the existing resource for the "Individual ECS Address Provision Configuration" resource. Then the NEF shall send a HTTP response including "200 OK" status code with EcsAddressProvision data structure or "204 No Content" status code.

To delete an existing Individual ECS Address Provision Configuration, the AF shall initiate an HTTP DELETE request to the NEF for the "Individual ECS Address Provision Configuration" resource. Upon receipt of the corresponding HTTP DELETE message, if the AF is authorized, the NEF shall interact with the UDM to delete the existing resource at the UDM by using Nudm_ParameterProvision service as defined in 3GPP TS 29.503 [17]. If the request is accepted by the UDM, the NEF shall delete the existing resource for the "Individual ECS Address Provision Configuration" resource. Then the NEF shall send a HTTP "204 No Content" response.

4.4.26 Procedures for AM Policy Authorization

4.4.26.1 General

The procedures are used by AF to send request to NEF for AM Policy Authorization, and for NEF to authorize an AF triggered AM Policy Authorization request and trigger a respective Npcf_AMPolicyAuthorization request. This service also allows the AF to subscribe/unsubscribe the notification of event(s) for the existing AF application AM context.

The following procedures support:

- Create/Modify/Delete of AF triggered application AM context; and
- Subscribe/Unsubscribe/Notify event(s) for the existing AF application AM context.

4.4.26.2 Creation of a new Individual Application AM Context

In order to create a new Individual application AM context resource for a given AF, the AF shall initiate an HTTP POST request to the NEF for the "Application AM Contexts" resource. The HTTP POST request message body shall include the AppAmContextExpData data structure that shall include:

- identification of an individual UE via a "gpsi" attribute;

and may include:

- subscription to AM policy event(s) notification as "evSubscs" attribute. For each subscribed event, the AF may include the description of the event reporting mode, as e.g. whether immediate reporting is required;
- a high throughput requirement Indication as "highThruInd" attribute;
- service coverage requirements as "covReqs" attribute; and
- policy duration requirement as "policyDuration" attribute.

Upon receipt of the corresponding HTTP POST message, if the AF is authorized by the NEF to request the AM policy authorization, the NEF shall trigger a respective Npcf_AMPolicyAuthorization_Create request as defined in 3GPP TS 29.534 [43]. If the request is accepted by the PCF and the PCF informs the NEF with a successful response, the NEF shall create a new "Individual application AM Context" and assign an application AM context identifier for the "Individual application AM Context" resource.

Then the NEF shall send a HTTP "201 Created" response with:

- AppAmContextExpRespData data structure as response body, including the created "Individual application AM Context" resource and, if immediate reporting was requested for the subscribed event(s), the currently available value(s), if received from the PCF; and
- a Location header field containing the URI of the created "Individual application AM Context" resource to the AF.

If the NEF receives an error response from the PCF, the NEF shall not create the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.26.3 Modification of an existing individual Application AM Context

In order to modify an existing individual Application AM Context resource, the AF shall initiate an HTTP PATCH request to the NEF for the "Individual application AM Context" resource. The body of the HTTP PATCH message shall include the AppAmContextExpUpdateData data type as defined in clause 5.17.1.3.3.3.

Upon receipt of the corresponding HTTP PATCH message, if the AF is authorized by the NEF to modify the AM policy authorization request, the NEF shall interact with the PCF to modify an existing application AM context by using Npcf_AMPolicyAuthorization_Update request as defined in 3GPP TS 29.534 [43]. If the modification request is accepted by the PCF and the PCF informs the NEF with a successful response, the NEF shall update the existing application AM context for the "Individual application AM Context" resource. Then the NEF shall send a HTTP response including "200 OK" status code with AppAmContextExpRespData data structure (including the updated resource representation and, if immediate reporting was requested for the new subscribed event(s), the currently available value(s), if received from the PCF) or "204 No Content" status code to the AF.

If the NEF receives an error response from the PCF, the NEF shall not modify the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.26.4 Deletion of an existing individual Application AM Context

To delete an existing application AM context, the AF shall initiate an HTTP DELETE request to the NEF for the "Individual application AM Context" resource.

Upon receipt of the corresponding HTTP DELETE message, if the AF is authorized to delete the application AM context, the NEF shall interact with the PCF to delete an existing application AM context at the PCF by using Npcf_AMPolicyAuthorization_Delete request as defined in 3GPP TS 29.534 [43]. If the request is accepted by the PCF and informs the NEF with a successful response, the NEF shall delete the existing application AM context for the "Individual application AM Context" resource. Then the NEF shall send a HTTP "204 No Content" response to the AF.

If the NEF receives an error response from the PCF, the NEF shall take proper error handling action and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure

with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.26.5 Create or modify subscription to notification of AM policy event

In order to create or modify the subscription to notification of AM policy event(s) for the application AM context, the AF shall send an HTTP PUT message to the NEF to the sub-resource "AM Policy Events Subscription", the HTTP PUT message shall include the AmEventsSubscData data structure as request body.

Upon receipt of the HTTP request from the AF, if the AF is authorized, the NEF shall interact with the PCF to subscribe to, or modify the subscription to the AM policy event notification by using Npcf_AMPolicyAuthorization_Subscribe request as defined in 3GPP TS 29.534 [43]. If the request is accepted by the PCF and the PCF informs the NEF with a successful response, the NEF shall create a new AM policy event subscription sub-resource in an existing application AM context or modify an existing AM policy event subscription to the "AM Policy Events Subscription" sub-resource. Then the NEF shall send:

- for a subscription creation request, an HTTP "201 Created" response with:
 - a. AmEventsSubscRespData data structure as response body, including the created "AM Policy Events Subscription" resource and, if immediate reporting was requested for the subscribed event(s), the currently available value(s), if received from the PCF; and
 - b. a Location header field containing the URI of the created individual subscription resource to the AF; or
- for a subscription update request, an HTTP "200 OK" response code with AmEventsSubscRespData data structure with the updated "AM Policy Events Subscription" resource or HTTP "204 No Content" response code and, if immediate reporting was requested for the subscribed event(s), the currently available value(s), if received from the PCF;

as response body to the AF.

If the NEF receives an error response from the PCF, the NEF shall not create or modify the sub-resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.26.6 Unsubscription to notification of AM policy event

In order to delete existing subscribed AM policy event(s) within the existing Individual application AM context, the AF shall initiate the HTTP DELETE request message to the NEF to the "AM Policy Events Subscription" sub-resource.

Upon receipt of the corresponding HTTP DELETE message, if the AF is authorized to delete the notification of AM policy event(s), the NEF shall interact with the PCF to delete an existing subscription of notification to AM policy event(s) within the existing application AM context at the PCF by using Npcf_AMPolicyAuthorization_Unsubscribe request as defined in 3GPP TS 29.534 [43]. If the request is accepted by the PCF and informs the NEF with a successful response, the NEF shall delete the existing subscription to notification of AM policy event(s) within the existing application AM context for the "AM Policy Events Subscription" resource. Then the NEF shall send a HTTP "204 No Content" response to the AF.

If the NEF receives an error response from the PCF, the NEF shall take proper error handling action and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.26.7 Notification of AM policy event

If the NEF receives an AM policy event notification from the PCF indicating that the subscribed AM policy event has been detected, the NEF shall provide a notification to AF by sending HTTP POST message that include the AmEventsNotification data structure in the request body. Upon receipt of the AM policy event notification, the AF shall respond with a "204 No Content" status code to confirm the received notification to the NEF.

4.4.27 Procedures for AF triggered Access and Mobility Influence

4.4.27.1 General

The procedures are used by the AF to provision the Access and Mobility(AM) policy related request via NEF to one or multiple UEs that may have already registered or not. This service also allows the NEF to send the notification of service area coverage outcome events to the AF.

4.4.27.2 Create the AM Influence Subscription

In order to create a resource for the AM Influence, the AF shall send an HTTP POST request message to the NEF for the "AM Influence Subscription" resource. The request message may include the AF Transaction Identifier, GPSI, DNN, S-NSSAI, External Group Identifier, list of application identifier(s), AF Service Identifier, throughput requirements, service area coverage requirements represented by list of geographical areas, policy duration, subscribed event(s) and the notification destination address.

The request may target one or multiple UEs that may have already registered or not. For an individual UE identified by GPSI, or a group of UEs identified by External Group Identifier, the NEF shall interact with the UDM by invoking the Nudm_SubscriberDataManagement service as described in 3GPP TS 29.503 [17] to retrieve the SUPI or Internal Group Identifier. For all UEs, the NEF will not interact with the UDM.

The NEF shall interact with the UDR by invoking the Nudr_DataRepository service as described in 3GPP TS 29.504 [20] to store the policy data in the UDR.

If the NEF receives an error response from the UDR, the NEF shall not create the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

After receiving a successful response from the UDR, the NEF shall create a resource "Individual AM Influence Subscription", which represents the AM influence subscription, addressed by a URI that contains the AF Identifier and an NEF-created subscription identifier. The NEF shall respond to the AF with a "201 Created" status code, including a Location header field containing the URI for the created resource. The AF shall use the URI received in the Location header when it subsequently sends requests to the NEF to reference this AM influence subscription.

4.4.27.3 Modify the AM Influence Subscription

In order to update an existing AM influence subscription, the AF shall send an HTTP PUT or HTTP PATCH request message to the NEF for the "Individual AM Influence Subscription" resource. The NEF shall interact with the UDR by invoking the Nudr_DataRepository service as described in 3GPP TS 29.504 [20] to update the policy data in the UDR.

If the NEF receives an error response from the UDR, the NEF shall not update the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

After receiving a successful response from the UDR, the NEF shall update the "Individual AM Influence Subscription" resource which represents the AM influence subscription, and shall respond to the AF with an HTTP "200 OK" or "204 No Content" response message.

4.4.27.4 Delete the AM Influence Subscription

In order to delete an existing AM influence subscription, the AF shall send an HTTP DELETE request message to the NEF for the "Individual AM Influence Subscription" resource. The NEF shall interact with the UDR by invoking the Nudr_DataRepository service as described in 3GPP TS 29.504 [20] to delete the policy data in the UDR. If the NEF receives an error response from the UDR, the NEF shall take proper error handling actions and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

After receiving a successful response from the UDR, the NEF shall delete the "Individual AM Influence Subscription" resource which represents the AM influence subscription, and shall respond to the AF with an HTTP "204 No Content" response message.

4.4.27.5 Notification of service area coverage outcome events

When the NEF receives the notification of service area coverage outcome events from the PCF as defined in 3GPP TS 29.534 [43], the NEF shall provide a notification by sending an HTTP POST message to the AF. The HTTP POST message shall include the subscribed event (service area coverage outcome event) to the AF identified by the notification destination received during the creation/modification of the AM Influence resource.

Upon receipt of the event notification, the AF shall respond with a "204 No Content" status code to confirm the received event notification.

4.4.28 Procedures for Northbound EAS Deployment Information management

4.4.28.1 General

The procedures are used by AF to provide, update or delete EAS Deployment Information to NEF, and for NEF to authorize the AF provisioned EAS Deployment Information to be stored in the UDR.

The following procedures support:

- Create/Update/Delete the AF provisioned EAS Deployment information;

4.4.28.2 Creation of a new Individual EAS Deployment information resource

In order to create a new Individual EAS Deployment information resource for a given AF, the AF shall initiate an HTTP POST request to the NEF for the "EAS Deployment Information" resource. The HTTP POST request message body shall include the EasDeployInfo data structure that shall include:

- FQDN(s) of an application deployed in the Local part of the DN via an "fqdnPatternList" attribute;

and may include:

- an AF service identifier as the "afServiceId" attribute;
- an DNN as "dnn" attribute;
- an S-NSSAI as "snssai" attribute;
- an external Group Identifier as "exterGroupId" attribute;
- identification of an application as "appId" attribute; and
- list of DNS server identifier and/or IP address(s) of the EAS in the local DN for each DNAI as "dnaiInfos" attribute.

Upon receipt of the corresponding HTTP POST message, if the AF is authorized by the NEF to provide the EAS Deployment Information, the NEF shall interact with the UDM by using Nudm_SubscriberDataManagement service as defined in 3GPP TS 29.503 [17] to translate the external group identifier into the corresponding internal group identifier and the NEF may derive DNN and S-NSSAI from the AF Service Identifier if not received explicitly. Then the NEF shall interact with the UDR to create the associated EAS Deployment information by using the Nudr_DataRepository service as defined in 3GPP TS 29.504 [20]. If the request is accepted by the UDR and the UDR informs the NEF with a successful response, the NEF shall create a new "Individual EAS Deployment Information" resource. Then the NEF shall send a HTTP "201 Created" response with the EasDeployInfo data structure including the contents of the created EAS Deployment Information resource in the response body and a Location header field containing the URI of the created individual EAS Deployment Information resource. If the NEF receives an error response from the UDR, the NEF shall not create the resource and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.28.3 Modification of an existing individual EAS Deployment Information resource

In order to modify an existing individual EAS Deployment Information resource, the AF shall initiate an HTTP PUT request to the "Individual EAS Deployment Information" resource. The request body shall include the EasDeployInfo data structure. The "afServiceId" value shall remain unchanged from the previous value, if available in the HTTP PUT message.

Upon receipt of the corresponding HTTP PUT request message, if the AF is authorized by the NEF to modify the existing individual EAS Deployment Information resource, the NEF shall interact with the UDR by invoking the Nudr_DataRepository service as described in 3GPP TS 29.504 [20] to modify the EAS Deployment Information in the UDR.

If the modification request is accepted by the UDR and the UDR informs the NEF with a successful response, the NEF shall update the existing individual EAS Deployment Information resource. Then the NEF shall send a HTTP response including "200 OK" status code with EasDeployInfo data structure or "204 No Content" status code.

If the NEF receives an error response from the UDR, the NEF shall not update the "Individual EAS Deployment Information" resource and shall respond a proper error status code to the AF. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.28.4 Deletion of an existing individual EAS Deployment Information resource

In order to delete an existing EAS Deployment Information, the AF shall send an HTTP DELETE request message to the NEF for the "Individual EAS Deployment Information" resource. The NEF shall interact with the UDR by invoking the Nudr_DataRepository service as described in 3GPP TS 29.504 [20] to delete the EAS Deployment Information in the application data in the UDR.

After receiving a successful response from the UDR, the NEF shall delete the "Individual EAS Deployment Information" resource and shall respond to the AF with an HTTP "204 No Content" response message.

If the NEF receives an error response from the UDR, the NEF shall take proper error handling actions and shall respond to the AF with a proper error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.28.5 Deletion of EAS Deployment Information based on given criteria

In order to delete existing EAS Deployment Information resource(s) which match given attributes, the NF service consumer shall send an HTTP POST request with "{apiRoot}/3gpp-eas-deployment/<apiVersion>/remove-edis" as URI. The POST request body shall contain an EdiDeleteCriteria data structure. The EdiDeleteCriteria data structure provided in the request body shall include at least one of the following:

- an AF identifier within the "afId" attribute;
- DNN and slice information within the "dnnSnsai" attribute;

Upon the reception of this HTTP POST request, if the NF service consumer is authorized by the NEF to delete the EAS Deployment Information, the NEF shall determine the EAS Deployment Information resources that match the provided criteria and interact with the UDR to delete the associated EAS Deployment Information by using the Nudr_DataRepository service as defined in 3GPP TS 29.504 [20]. If the request is accepted by the UDR and the UDR informs the NEF with a successful response, the NEF shall send a HTTP "204 No Content" response. If the NEF receives an error code from the UDR, the NEF shall respond to the AF with a proper error status code.

4.4.29 Procedures for MBS Management

4.4.29.1 General

The procedures described in the clauses below are used by an AF to interact with the 5GC for MBS management as defined in 3GPP TS 23.247 [53] and 3GPP TS 26.502 [65], in order to carry out the following procedures:

- MBS TMGI management procedures.

- MBS Session management procedures.
- MBS User Service management procedures.
- MBS User Data Ingest Session management procedures.

4.4.29.2 Procedures for MBS TMGI management

4.4.29.2.1 General

The procedures described in the clauses below are used by an AF to request and manage TMGI(s) for MBS session(s) as defined in clause 7.1 of 3GPP TS 23.247 [53].

4.4.29.2.2 Procedure for MBS TMGI(s) allocation or MBS TMGI(s) expiry time refresh

This procedure is used by an AF to request the allocation of TMGI(s) for new MBS session(s) or the refresh of the expiry time of already allocated MBS TMGI(s).

In order to request the allocation of TMGI(s) for new MBS session(s) or the refresh of the expiry time of already allocated MBS TMGI(s), an AF shall send a Nnef_MBSTMGI_Allocation request message to the NEF using the HTTP POST method with the request body including the TmgiAllocRequest data structure that shall contain:

- within the "afId" attribute, the identifier of the AF that is sending the request;
- within the "tmgiParams" attribute, the parameters (e.g. number of TMGI(s) to be allocated, etc.) to request the allocation of TMGI(s) for new MBS session(s) or the refresh of the expiry time of already allocated TMGI(s);
- within the "suppFeat" attribute, the features supported by the AF, if feature negotiation needs to take place;

and may contain:

- within the "notificationUri" attribute, the notification URI via which the AF desires to receive notifications on timer expiry for TMGI(s);
- within the "requestTestNotification" attribute, an indication on whether the NEF should send a test notification, if the "Notification_test_event" feature is supported;
- within the "websocketNotifConfig" attribute, the configuration parameters to set up notification delivery over WebSocket protocol, if the "Notification_websocket" feature is supported; and/or
- within the either "mbsServiceArea" attribute or the "extMbsServiceArea" attribute, the MBS service area for the TMGI(s) to be allocated, which may be needed for a local MBS service.

The NEF shall then check whether the AF is authorized to perform this operation or not as defined in clause 6.1.1 of 3GPP TS 23.247 [53]. If the AF is authorized, then:

- if the MBS Service Area information is provided via the "extMbsServiceArea" attribute, the NEF shall translate the received geographical area(s) or civic address(es) to a list of TAI(s) and/or cell ID(s);
- the NEF shall determine the target MB-SMF either by querying the NRF to discover and select an MB-SMF (service) instance that can handle this request, or based on local configuration;
- if the received MBS Service Area information cannot be covered by the MB-SMF Service Area of a single MB-SMF, the NEF shall reject the request and respond to the AF with an HTTP "403 Forbidden" status code with the response body including the ProblemDetailsTmgiAlloc data structure containing:
 - the ProblemDetails data structure containing the "cause" attribute set to the "MBS_SERVICE_AREA_TOO_LARGE" application error; and optionally
 - the ReducedMbsServArea data structure containing the reduced MBS Service Area information;

and

- the NEF shall convey this MBS TMGI(s) allocation request or expiry time refresh request to the selected MB-SMF using the Nmbsmf_TMGI service API as defined in 3GPP TS 29.532 [52].

Upon reception of a successful response from the MB-SMF as defined in 3GPP TS 29.532 [52], the NEF shall forward the received information (e.g. allocated MBS TMGI(s), expiry time or updated expiry time of existing MBS TMGI(s), etc.) to the AF in a Nnef_MBSTMGI_Allocation response message with an HTTP "200 OK" status code and the response body including the TmgiAllocResponse data structure that shall contain:

- within the "tmgiInfo" attribute, the MBS TMGI(s) allocation information or the refreshed expiry time for already allocated MBS TMGI(s); and
- within the "suppFeat" attribute, the features supported by both the AF and the NEF, if feature negotiation needs to take place and the AF provided the list of its supported features in the corresponding request body.

On failure or if the NEF receives an error response from the MB-SMF, the NEF shall take proper error handling actions, as specified in clause 5.19.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.2.3 Procedure for MBS TMGI(s) deallocation

This procedure is used by an AF to request the deallocation of previously allocated MBS TMGI(s).

In order to request the deallocation of previously allocated MBS TMGI(s), an AF shall send a Nnef_MBSTMGI_Deallocation request message to the NEF using the HTTP POST method with the request body including the TmgiDeallocRequest data structure that shall contain :

- within the "afId" attribute, the identifier of the AF that is sending the request; and
- within the "tmgis" attribute, the list of MBS TMGI(s) for which deallocation is requested.

The NEF shall then check whether the AF is authorized to perform this operation or not as defined in clause 6.1.1 of 3GPP TS 23.247 [53]. If the AF is authorized, the NEF shall convey this MBS TMGI(s) deallocation request to the MB-SMF using the Nmbsmf_TMGI service API as defined in 3GPP TS 29.532 [52].

Upon reception of a successful response from the MB-SMF confirming the deallocation of the TMGI(s), the NEF shall forward this confirmation to the AF in a Nnef_MBSTMGI_Deallocation response message with an HTTP "204 No Content" status code.

On failure or if the NEF receives an error response from the MB-SMF, the NEF shall take proper error handling actions, as specified in clause 5.19.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.2.4 Procedure for MBS TMGI(s) timer expiry notification

This procedure is used by the NEF to notify an already subscribed AF of timer expiry for previously allocated MBS TMGI(s).

In order to notify an AF of timer expiry for previously allocated MBS TMGI(s), the NEF shall send a Nnef_MBSTMGI_ExpiryNotify request message to the AF using the HTTP POST method with the request body including the ExpiryNotif data structure that shall contain:

- within the "tmgis" attribute, the list of MBS TMGI(s) for which the timer has expired.

Upon reception of this notification request, the AF shall acknowledge its successful reception by sending a Nnef_MBSTMGI_ExpiryNotify response message with an HTTP "204 No Content" status code.

On failure, the AF shall take proper error handling actions, as specified in clause 5.19.7, and respond to the NEF with an appropriate error status code.

4.4.29.3 Procedures for MBS session management

4.4.29.3.1 General

The procedures described in the clauses below are used by an AF to create, update or delete MBS session(s) and to subscribe to / unsubscribe from MBS Session Status event(s) reporting at the NEF.

This service is applicable for both broadcast and multicast sessions or, for a location dependent MBS session, the part of an MBS Session within an MBS service area, as defined in 3GPP TS 23.247 [53].

4.4.29.3.2 Procedure for MBS session creation

This procedure is used by an AF to request the creation of a multicast or a broadcast MBS session or, for a location dependent MBS session, the part of an MBS Session within an MBS service area.

In order to request the creation of an MBS Session, an AF shall send a Nnef_MBSSession_Create request to the NEF using the HTTP POST method and targeting the "MBS Sessions" collection resource with the request message body including the MbsSessionCreateReq data structure that shall contain:

- within the "afId" attribute, the identifier of the AF that is sending the request; and
- within the "mbsSession" attribute, the characteristics of the MBS session that is to be created.

The "mbsSession" attribute shall be encoded using the MbsSession data structure that shall contain:

- within the "mbsSessionId" attribute, the identifier of the MBS Session (e.g. SSM, TMGI), if available;
- within the "tmgiAllocReq" attribute, the TMGI allocation request indication, if the "mbsSessionId" attribute is either absent or does not contain a TMGI; and
- within the "serviceType" attribute, the MBS service type (i.e. multicast or broadcast);
- within the "locationDependent" attribute, the location dependent MBS session indication, if the request is related to a location dependent MBS;

and may further contain:

- for a multicast or a broadcast MBS session:
 - within the "ingressAddrReq" attribute, the ingress transport address request indication to indicate whether the allocation of an ingress transport address is requested or not;
 - within the "extMbsServiceArea" attribute, the MBS service area, for a location dependent MBS session or a local MBS session;
 - within the "activationTime" attribute, the MBS session activation time;
 - within the "terminationTime" attribute, the MBS session termination time;
 - within the "mbsServInfo" attribute, the MBS Service Information for the MBS session; and
 - within the "mbsSessionSubsc" attribute, the parameters to request the creation of a subscription to MBS session status event(s) reporting;
- for a multicast MBS session:
 - within the "activityStatus" attribute, the MBS session activity status (i.e. active or inactive); and
 - within the "anyUeInd" attribute, the indication of whether any UE may join the MBS session;
- for a broadcast MBS session:
 - within the "mbsFsaIdList" attribute, the list of MBS frequency selection area Identifiers (i.e. FSA IDs).

At the reception of this HTTP POST request for MBS session creation:

- the NEF may decide to interact with the PCF for MBS policy authorization of the received MBS Service Information;
- if the NEF decides to interact with the PCF, then:
 - if the NEF did not receive an MBS Session Identifier or received a TMGI allocation request within the "tmgiAllocReq" attribute, the NEF shall request TMGI allocation to the MB-SMF using the Nmbsmf_TMGI service API, as specified in 3GPP TS 29.532 [52];
 - if the received MBS Session Creation request is for the creation of an MBS Session that is part of a location dependent MBS, i.e. the "locationDependent" attribute is present and set to "true", and there is a need to select the same PCF for all the MBS Sessions composing the location dependent MBS, the NEF shall interact with the BSF using the Nbsf_Management service API to check whether there is already a PCF serving the MBS Sessions of the location dependent MBS based on the MBS Session Identifier, as specified in 3GPP TS 29.532 [52]. Then:

NOTE 1: Interacting with the BSF to discover whether there is already a PCF serving the MBS Session is not necessary in a deployment with a single PCF.

- if there is a PCF already serving the MBS Sessions of the location dependent MBS, the NEF shall use this PCF for MBS policy authorization of the received MBS Service Information;
- if there is no PCF already serving the MBS Sessions of the location dependent MBS or the NEF did not interact with the BSF, the NEF shall interact with the NRF using the Nnrf_NFDiscovery service API to discover a PCF (service) instance to serve the MBS Session possibly based on the MBS Session Identifier, as specified in 3GPP TS 29.510 [57];
- the NEF shall then interact with the selected PCF (service) instance using the Npcf_MBSPolicyAuthorization service API for MBS policy authorization of the received MBS Service Information and the creation of a corresponding MBS Application Session Context at the PCF, as specified in 3GPP TS 29.537 [63]; and
- if MBS session authorization is successful or when the NEF decides to not interact with the PCF for MBS policy authorization, the NEF shall interact with the MB-SMF using the Nmbsmf_MBSSession service API to request the creation of a corresponding MBS session at the MB-SMF as specified in 3GPP TS 29.532 [52];
- if the MBS Service Area information is provided within the "extMbsServiceArea" attribute, the NEF shall translate the received geographical area(s) or civic address(es) to a list of cell ID(s) and/or list of TAI(s) before relaying it to the MB-SMF; and
- if the NEF discovers the target MB-SMF based on the MBS Service Area and the received MBS Service Area information cannot be covered by the MB-SMF Service Area of a single MB-SMF, the NEF shall reject the request and respond to the AF with an HTTP "403 Forbidden" status code with the response body including the ProblemDetailsTmgiAlloc data structure containing:
 - the ProblemDetails data structure containing the "cause" attribute set to the "MBS_SERVICE_AREA_TOO_LARGE" application error; and optionally
 - the ReducedMbsServArea data structure containing the reduced MBS Service Area information.

Upon reception of a successful response from the MB-SMF and successful MBS session creation at the NEF, the NEF shall return a Nnef_MBSSession_Create response with an HTTP "201 Created" status code to the AF including a "Location" header that shall contain the URI of the created "Individual MBS Session" resource, and the response body including the MbsSessionCreateRsp data structure that shall contain:

- within the "mbsSession" attribute, a representation of the created Individual MBS Session resource encoded using the MbsSession data structure, including:
 - the area session ID assigned by the MB-SMF in the case of a location dependent MBS within the "areaSessionId" attribute of the MbsSession data structure;
 - the allocated TMGI for the MBS session, if the MBS session creation request included a "tmgiAllocReq" attribute requesting TMGI allocation for the MBS session, within the "tmgi" attribute;
 - if unicast transport is used over N6mb/Nmb9, the ingress MB-UPF tunnel information, within the "ingressTunAddr" attribute;

- if the "serviceType" value is "BROADCAST" and any MBS FSA ID(s) received from the MB-SMF, the list of MBS FSA ID(s) within the "mbsFsaIdList" attribute; and
- if the "ReducedMbsServArea" feature is supported and the MB-SMF reduced the MBS Service Area initially requested by the AF, the reduced MBS Service Area that can be supported by the network within the "reducedMbsServArea" attribute or the "reducedExtMbsServArea" attribute.

and

- within the "eventList" attribute, a list of MBS Session Status Event(s) report(s), if available.

If the MBS session creation request contained a request to also create a subscription to MBS session status event(s) within the "mbsSessionSubsc" attribute, the NEF shall also create a corresponding "Individual MBS Session Subscription" resource and return a representation of it in the HTTP POST response body within the "mbsSessionSubsc" attribute of the MbsSession data structure. The "mbsSessionSubsc" attribute shall contain the identifier of the created "Individual MBS Session Subscription" resource within the "subscriptionId" attribute. The AF shall construct the URI of the created "Individual MBS Session Subscription" resource by appending the path segments "/subscriptions/{subscriptionId}", where the "subscriptionId" takes the value of the received "subscriptionId" attribute, to the URI of the created "Individual MBS Session" resource received within the HTTP Location header.

On failure or if the NEF receives an error code from the PCF, the NRF or the MB-SMF, the NEF shall take proper error handling actions, as specified in clause 5.20.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.3.3 Procedure for MBS session update

This procedure is used by an AF to request the modification of an existing multicast or a broadcast MBS session or, for a location dependent MBS session, the part of an MBS Session within an MBS service area.

In order to request the modification of an existing MBS Session, an AF shall send a Nnef_MBSSession_Update request using the HTTP PATCH method and targeting the URI of the corresponding "Individual MBS Session" resource and the request message body including an array of PatchItem data structure(s) containing the requested modifications. For a multicast or a broadcast MBS session, only the "mbsServiceArea" attribute, and/or the "mbsServInfo" attribute may be modified. For a multicast MBS session, the "activityStatus" attribute may also be modified. For a broadcast MBS session, the "mbsFsaIdList" attribute may also be modified.

At the reception of this HTTP PATCH request for MBS session modification:

- if updated MBS Service Information is provided and the NEF decided to interact with the PCF during MBS Session Creation as specified in clause 4.4.29.3.2, the NEF shall also interact with the PCF for MBS policy authorization of the received updated MBS Service Information and the update of the corresponding MBS Application Session Context, as specified in 3GPP TS 29.537 [63];
- if MBS session authorization is successful or when the NEF does not interact with the PCF, the NEF shall interact with the MB-SMF to request the modification of the corresponding MBS session at the MB-SMF as specified in 3GPP TS 29.532 [52];
 - if the NEF receives an "indication that the PCF shall be contacted" within the "contactPcfInd" attribute from the PCF as specified in 3GPP TS 29.537 [63], the NEF shall relay this indication to the MB-SMF;

and

- if updated MBS Service Area information is provided within the "extMbsServiceArea" attribute, the NEF shall translate the received geographical area(s) or civic address(es) to a list of cell ID(s) and/or list of TAI(s) before relaying it to the MB-SMF.

Upon reception of a successful response from the MB-SMF and successful MBS session modification, the NEF shall return a Nnef_MBSSession_Update response with an HTTP "204 No Content" status code, or when the "ReducedMbsServArea" feature is supported, with either:

- if no updated MBS Service Area was provided in the corresponding request or an updated MBS Service Area was provided in the corresponding request and was fully accepted by the MB-SMF, an HTTP "204 No Content" status code.

- if an updated MBS Service Area was provided in the corresponding request but and only partially accepted by the MB-SMF (i.e., the MB-SMF reduced the MBS Service Area), an HTTP "200 OK" status code with the response body including the reduced MBS service area information within the MbsSessionUpdateResp data structure.

On failure or if the NEF receives an error response from the PCF or the MB-SMF, the NEF shall take proper error handling actions, as specified in clause 5.20.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.3.4 Procedure for MBS session deletion

This procedure is used by an AF to request the deletion of an existing multicast or a broadcast MBS session or, for a location dependent MBS session, the part of an MBS Session within an MBS service area.

In order to request the deletion of an existing MBS Session, an AF shall send a Nnef_MBSSession_Delete request using the HTTP DELETE method and targeting the URI of the corresponding "Individual MBS Session" resource.

At the reception of this HTTP DELETE request for MBS session deletion:

- if the NEF decided to interact with the PCF during MBS Session Creation as specified in clause 4.4.29.3.2, the NEF shall also interact with the PCF to request the deletion of the corresponding MBS Application Session Context, as specified in 3GPP TS 29.537 [63]; and
- the NEF shall interact with the MB-SMF to request the deletion of the corresponding MBS Session.

Upon success, the NEF shall return a Nnef_MBSSession_Delete response with an HTTP "204 No Content" status code. On failure or if the NEF receives an error response from the PCF or the MB-SMF, the NEF shall take proper error handling actions, as specified in clause 5.20.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.3.5 Procedure for MBS session status subscription

This procedure is used by an AF to request to create a subscription to MBS session status event(s) reporting for a multicast or a broadcast MBS session or, for a location dependent MBS session, the part of an MBS Session within an MBS service area.

In order to request the creation of a new subscription to MBS Session status event(s) reporting, an AF shall send a Nnef_MBSSession_StatusSubscribe request to the NEF using the HTTP POST method and targeting the "MBS Session Subscriptions" collection resource, with the request body including the MbsSessionSubsc data structure.

On successful MBS session subscription creation, the NEF shall return a Nnef_MBSSession_StatusSubscribe response with an HTTP "201 Created" status code to the AF, including a "Location" header containing the URI of the created "Individual MBS Session Subscription" resource and the response body containing a representation of the created resource within the MbsSessionSubsc data structure.

On failure or if the NEF receives an error response from the MB-SMF, the NEF shall take proper error handling actions, as specified in clause 5.20.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.3.6 Procedure for MBS session status unsubscription

This procedure is used by an AF to request the deletion of an existing subscription to MBS session status event(s) reporting for a multicast or a broadcast MBS session or, for a location dependent MBS session, the part of an MBS Session within an MBS service area.

In order to request the deletion of an existing subscription to MBS Session status event(s) reporting, an AF shall send a Nnef_MBSSession_StatusUnsubscribe request to the NEF using the HTTP DELETE method and targeting the corresponding "Individual MBS Session Subscription" resource.

On successful deletion of the subscription, the NEF shall return a Nnef_MBSSession_StatusUnsubscribe response with an HTTP "204 No Content" status code.

On failure or if the NEF receives an error response from the MB-SMF, the NEF shall take proper error handling actions, as specified in clause 5.20.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.3.7 Procedure for MBS session status notification

This procedure is used by the NEF to send MBS session status event(s) notifications to a previously subscribed AF.

In order to send an MBS Session status event(s) notification, the NEF shall send a Nnef_MBSSession_StatusNotify request to the AF using the HTTP POST method and targeting the notification URI provided by the AF during the corresponding MBS session subscription creation/modification, with the request body including the MbsSessionStatusNotif data structure that shall contain:

- within the "eventList" attribute, the reported MBS session event(s) and the related information, encoded via the MbsSessionEventReportList data structure that shall contain:
 - within the "eventReportList" attribute, one or several MBS session event report(s), with each one of them encoded using the MbsSessionEventReport data structure that shall contain:
 - within the "eventType" attribute, the reported MBS session status event;
 - within the "timeStamp" attribute, the time at which the event is generated, if available;
 - within the "ingressTunAddrInfo" attribute, the ingress tunnel address to use to send MBS session data over N6mb/Nmb9 interface, if the "eventType" attribute is set to "INGRESS_TUNNEL_ADD_CHANGE";

and

- within the "eventList" attribute, the list of MBS session events to be reported, encoded via the MbsSessionEventReportList data structure that shall contain:
 - within the "eventReportList" attribute, one or several individual MBS session event report(s), with each one of them encoded within the MbsSessionEventReport data structure that shall contain:
 - within the "broadcastDelStatus" attribute, the broadcast delivery status (e.g. whether the MBS session is ACTIVATED or TERMINATED), if the "eventType" attribute is set to "BROADCAST_DELIVERY_STATUS".

Upon reception of this notification request, the AF shall acknowledge its successful reception by sending a Nnef_MBSSession_StatusNotify response with an HTTP "204 No Content" status code.

On failure, the AF shall take proper error handling actions, as specified in subclause 5.20.7, and respond to the NEF with an appropriate error status code.

4.4.29.4 Procedures for MBS Parameters Provisioning

4.4.29.4.1 General

The procedures described in the clauses below are used by an AF to perform MBS parameters provisioning, e.g. multicast MBS Session Authorization information provisioning as defined in clause 7.2.9 of 3GPP TS 23.247 [53].

4.4.29.4.2 Procedure for multicast MBS Session Authorization information provisioning

This procedure is used by an AF to request the creation/update/deletion of an MBS Session Authorization information provisioning for a multicast MBS group.

In order to request the creation of an MBS Parameters Provisioning for the purpose of MBS Session Authorization information provisioning for a multicast MBS group, an AF shall trigger the Nnef_MBSSession API by sending an

HTTP POST request to the NEF targeting the "MBS Parameters Provisionings" collection resource, with the request body including the MbsPpData data structure that shall contain:

- within the "afId" attribute, the identifier of the AF that is sending the request;
- within the "mbsSessAuthData" attribute, the MBS Session Authorization information data to be provisioned, encoded via the MbsSessAuthData data structure that shall contain:
 - within the "extGroupId" attribute, the external group identifier of the targeted multicast MBS Group; and
 - within the "gpsisList" attribute, the list of the GPSI(s) of the member UE(s) constituting the multicast MBS group, if the multicast MBS group has not yet been created or the list of its member(s) needs to be updated; and
 - within the "mbsSessionIdList" attribute, the identifier(s) of the multicast MBS Session(s) that the multicast MBS group is authorized to join;

and

- within the "suppFeat" attribute, the features supported by the AF, if applicable (i.e. feature negotiation needs to take place).

The NEF shall then check whether the AF is authorized to perform this operation or not as defined in clause 7.2.9 of 3GPP TS 23.247 [53]. If the AF is authorized, the NEF shall trigger the Nudm_ParameterProvision service API of the UDM to request the provisioning of the received MBS Session Authorization information.

Upon reception of a successful response from the UDM as defined in 3GPP TS 29.503 [17], the NEF shall respond to the AF with an HTTP "200 OK" status code including a Location header field containing the URI of the created resource, and the response body containing the MbsPpData data structure containing a representation of the created "Individual MBS Parameters Provisioning" resource.

In order to request the update of an existing "Individual MBS Parameters Provisioning" resource for the purpose of MBS Session Authorization information provisioning for a multicast MBS group, an AF shall trigger the Nnef_MBSSession API by sending to the NEF either:

- an HTTP PUT request targeting the concerned "Individual MBS Parameters Provisioning" resource with the request body including the MbsPpData data structure; or
- an HTTP PATCH request targeting the concerned "Individual MBS Parameters Provisioning" resource with the request body including the MbsPpDataPatch data structure.

After authorizing the request, the NEF shall interact with the UDM via the the Nudm_ParameterProvision service API to request the provisioning of the received updated MBS Session Authorization information.

Upon reception of a successful response from the UDM as defined in 3GPP TS 29.503 [17], the NEF shall respond to the AF with an HTTP "200 OK" status code with the response body containing a representation of the updated Individual MBS Parameters Provisioning resource within the MbsPpData data structure, or an HTTP "204 No Content" status code.

In order to request the deletion of an existing "Individual MBS Parameters Provisioning" resource for the purpose of MBS Session Authorization information provisioning for a multicast MBS group, an AF shall trigger the Nnef_MBSSession API by sending an HTTP DELETE request targeting the concerned "Individual MBS Parameters Provisioning" resource to the NEF. After authorizing the request, the NEF shall interact with the UDM via the the Nudm_ParameterProvision service API to request to update accordingly the MBS Session Authorization information.

Upon reception of a successful response from the UDM as defined in 3GPP TS 29.503 [17], the NEF shall respond to the AF with an HTTP "204 No Content" status code.

On failure or if the NEF receives an error code from the UDM, the NEF shall take proper error handling actions, as specified in clause 5.20.7, and respond to the AF with an appropriate error status code.

NOTE: The stage 2 Nnef_ParameterProvisioning API for MBS Parameters Provisioning is implemented in stage 3 via the Nnef_MBSSession API.

4.4.29.5 Procedures for MBS User Service management

4.4.29.5.1 General

The procedures described in the clauses below are used by an external/untrusted AF (e.g. MBS Application Provider that lies outside the trusted DN) to manage MBS User Services via the NEF, i.e. create, retrieve, update and delete an MBS User Service, as defined in 3GPP TS 26.502 [65].

4.4.29.5.2 Procedure for MBS User Service creation

This procedure is used by an AF to request the creation of a new MBS User Service at the NEF.

In order to request the creation of an MBS User Service, an AF shall send a Nnef_MBSUserService_Create request to the NEF using the HTTP POST method and targeting the "MBS User Services" collection resource, with the request message body including the MBSUserService data structure, as specified in clause 5.26.2.2.3.2.

The NEF shall then check whether the AF is authorized to perform this operation or not. If the AF is authorized, the NEF shall then trigger the Nmbsf_MBSUserService service API of the MBSF to request the creation of the corresponding MBS User Service at the MBSF, as specified in 3GPP TS 29.580 [66].

Upon reception of a successful response from the MBSF, as defined in 3GPP TS 29.580 [66], the NEF shall return a Nnef_MBSUserService_Create response with an HTTP "201 Created" status code including a "Location" header field that shall contain the URI of the created resource, and the response body containing a representation of the created "Individual MBS User Service" resource within the MBSUserService data structure, as specified in clause 5.26.2.2.3.2.

On failure or if the NEF receives an error response from the MBSF, the NEF shall take proper error handling actions, as specified in clause 5.26.7, and respond to the AF with an appropriate error status code.

4.4.29.5.3 Procedure for MBS User Service retrieval

This procedure is used by an AF to request the retrieval of an existing MBS User Service at the NEF.

In order to request the retrieval of an existing MBS User Service, an AF shall send a Nnef_MBSUserService_Retrieve request using the HTTP GET method and targeting the URI of the concerned "Individual MBS User Service" resource, as specified in clause 5.26.2.3.3.1.

The NEF shall then check whether the AF is authorized to perform this operation or not. If the AF is authorized, the NEF shall then trigger the Nmbsf_MBSUserService service API of the MBSF to request the retrieval of the corresponding MBS User Service at the MBSF, as specified in 3GPP TS 29.580 [66].

Upon reception of a successful response from the MBSF, as defined in 3GPP TS 29.580 [66], the NEF shall return a Nnef_MBSUserService_Retrieve response with an HTTP "200 OK" status code and the response body containing a representation of the requested Individual MBS User Service resource within the MBSUserService data structure, as specified in clauses 5.26.2.3.3.1.

On failure or if the NEF receives an error code from the MBSF, the NEF shall take proper error handling actions, as specified in clause 5.26.7, and respond to the AF with an appropriate error status code.

4.4.29.5.4 Procedure for MBS User Service update/modification

This procedure is used by an AF to request the update/modification of an existing MBS User Service at the NEF.

In order to request the update of an existing MBS User Service, an AF shall send a Nnef_MBSUserService_Update request using the HTTP PUT method and targeting the URI of the corresponding "Individual MBS User Service" resource, with the request body including the MBSUserService data structure, as specified in clause 5.26.2.3.3.2.

In order to request the modification of an existing MBS User Service, an AF shall send a Nnef_MBSUserService_Update request using the HTTP PATCH method and targeting the URI of the corresponding "Individual MBS User Service" resource, with the request body including the MBSUserServicePatch data structure, as specified in clause 5.26.2.3.3.3.

The NEF shall then check whether the AF is authorized to perform this operation or not. If the AF is authorized, the NEF shall then trigger the Nmbssf_MBSUserService service API of the MBSF to request the update/modification of the corresponding MBS User Service at the MBSF, as specified in 3GPP TS 29.580 [66].

Upon reception of a successful response from the MBSF, as defined in 3GPP TS 29.580 [66], the NEF shall return a Nnef_MBSUserService_Update response with an HTTP "200 OK" status code with the response body containing a representation of the updated Individual MBS User Service resource within the MBSUserService data structure, or an HTTP "204 No Content" status code, as specified in clause 5.26.2.3.3.2 or clause 5.26.2.3.3.3.

On failure or if the NEF receives an error code from the MBSF, the NEF shall take proper error handling actions, as specified in clause 5.26.7, and respond to the AF with an appropriate error status code.

4.4.29.5.5 Procedure for MBS User Service deletion

This procedure is used by an AF to request the deletion of an existing MBS User Service at the NEF.

In order to request the deletion of an existing MBS User Service, an AF shall send a Nnef_MBSUserService_Delete request using the HTTP DELETE method and targeting the URI of the concerned "Individual MBS User Service" resource, as specified in clause 5.26.2.3.3.4.

NOTE: The Nnef_MBSUserService_Delete service operation corresponds to the stage 2 Nnef_MBSUserService_Destroy service operation defined in 3GPP TS 26.502 [65].

The NEF shall then check whether the AF is authorized to perform this operation or not. If the AF is authorized, the NEF shall then trigger the Nmbssf_MBSUserService service API of the MBSF to request the deletion of the corresponding MBS User Service at the MBSF, as specified in 3GPP TS 29.580 [66].

Upon reception of a successful response from the MBSF, as defined in 3GPP TS 29.580 [66], the NEF shall return a Nnef_MBSUserService_Delete response with an HTTP "204 No Content" status code, as specified in clause 5.26.2.3.3.4.

On failure or if the NEF receives an error code from the MBSF, the NEF shall take proper error handling actions, as specified in clause 5.26.7, and respond to the AF with an appropriate error status code.

4.4.29.6 Procedures for MBS User Data Ingest Session management

4.4.29.6.1 General

The procedures described in the clauses below are used by an external/untrusted AF (e.g. MBS Application Provider that lies outside the trusted DN) to manage an MBS User Data Ingest Session along with its subordinate MBS Distribution Session(s) via the NEF, i.e. create, retrieve, update/modify and delete an MBS User Data Ingest Session, create, retrieve, update/modify and delete an MBS User Data Ingest Session Status subscription, and manage the related MBS User Data Ingest Session Status notifications, as defined in 3GPP TS 26.502 [65].

4.4.29.6.2 Procedure for MBS User Data Ingest Session creation

This procedure is used by an AF to request the creation of a new MBS User Data Ingest Session at the NEF.

In order to request the creation of an MBS User Data Ingest Session, including a set of subordinate MBS Distribution Session(s), an AF shall send a Nnef_MBSUserDataIngestSession_Create request message to the NEF using the HTTP POST method and targeting the "MBS User Data Ingest Sessions" collection resource, with the request message body including the MBSUserDataIngestSession data structure, as specified in clause 5.27.2.2.3.2.

The NEF shall then check whether the AF is authorized to perform this operation or not. If the AF is authorized, the NEF shall then trigger the Nmbssf_MBSUserDataIngestSession API of the MBSF to request the creation of the corresponding MBS User Data Ingest Session at the MBSF, as specified in 3GPP TS 29.580 [66].

Upon reception of a successful response from the MBSF, as defined in 3GPP TS 29.580 [66], the NEF shall return a Nnef_MBSUserDataIngestSession_Create response message with an HTTP "201 Created" status code including a "Location" header field that shall contain the URI of the created resource, and the response body containing a representation of the created "Individual MBS User Data Ingest Session" resource within the MBSUserDataIngestSession data structure, as specified in clause 5.27.2.2.3.2.

On failure or if the NEF receives an error response from the MBSF, the NEF shall take proper error handling actions, as specified in clause 5.27.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a ProblemDetails data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.6.3 Procedure for MBS User Data Ingest Session retrieval

This procedure is used by an AF to request the retrieval of an existing MBS User Data Ingest Session at the NEF.

In order to request the retrieval of an existing MBS User Data Ingest Session, an AF shall send a Nnef_MBSUserDataIngestSession_Retrieve request message using the HTTP GET method and targeting the URI of the concerned "Individual MBS User Data Ingest Session" resource, as specified in clause 5.27.2.3.3.1.

The NEF shall then check whether the AF is authorized to perform this operation or not. If the AF is authorized, the NEF shall then trigger the Nmbsf_MBSUserDataIngestSession service API of the MBSF to request the retrieval of the corresponding MBS User Data Ingest Session at the MBSF, as specified in 3GPP TS 29.580 [66].

Upon reception of a successful response from the MBSF, as defined in 3GPP TS 29.580 [66], the NEF shall return a Nnef_MBSUserDataIngestSession_Retrieve response message with an HTTP "200 OK" status code and the response body containing a representation of the requested Individual MBS User Data Ingest Session resource within the MBSUserDataIngestSession data structure, as specified in clauses 5.27.2.3.3.1.

On failure or if the NEF receives an error code from the MBSF, the NEF shall take proper error handling actions, as specified in clause 5.27.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a ProblemDetails data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.6.4 Procedure for MBS User Data Ingest Session update/modification

This procedure is used by an AF to request the update/modification of an existing MBS User Data Ingest Session at the NEF.

In order to request the update of an existing MBS User Data Ingest Session, an AF shall send a Nnef_MBSUserDataIngestSession_Update request message using the HTTP PUT method and targeting the URI of the corresponding "Individual MBS User Data Ingest Session" resource, with the request body including the MBSUserDataIngestSession data structure, as specified in clause 5.27.2.3.3.2.

In order to request the modification of an existing MBS User Data Ingest Session, an AF shall send a Nnef_MBSUserDataIngestSession_Update request message using the HTTP PATCH method and targeting the URI of the corresponding "Individual MBS User Data Ingest Session" resource, with the request body including the MBSUserDataIngestSessionPatch data structure, as specified in clause 5.27.2.3.3.3.

The NEF shall then check whether the AF is authorized to perform this operation or not. If the AF is authorized, the NEF shall then trigger the Nmbsf_MBSUserDataIngestSession service API of the MBSF to request the update/modification of the corresponding MBS User Data Ingest Session at the MBSF, as specified in 3GPP TS 29.580 [66].

Upon reception of a successful response from the MBSF, as defined in 3GPP TS 29.580 [66], the NEF shall return a Nnef_MBSUserDataIngestSession_Update response message with an HTTP "200 OK" status code with the response body containing a representation of the updated Individual MBS User Data Ingest Session resource within the MBSUserDataIngestSession data structure, or an HTTP "204 No Content" status code, as specified in clause 5.27.2.3.3.2 or clause 5.27.2.3.3.3.

On failure or if the NEF receives an error code from the MBSF, the NEF shall take proper error handling actions, as specified in clause 5.27.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a ProblemDetails data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.6.5 Procedure for MBS User Data Ingest Session deletion

This procedure is used by an AF to request the deletion of an existing MBS User Data Ingest Session at the NEF.

In order to request the deletion of an existing MBS User Data Ingest Session, an AF shall send a Nnef_MBSUserDataIngestSession_Delete request message using the HTTP DELETE method and targeting the URI of the concerned "Individual MBS User Data Ingest Session" resource, as specified in clause 5.27.2.3.3.4.

NOTE: The Nnef_MBSUserDataIngestSession_Delete service operation corresponds to the stage 2 Nnef_MBSUserDataIngestSession_Destroy service operation defined in 3GPP TS 26.502 [65].

The NEF shall then check whether the AF is authorized to perform this operation or not. If the AF is authorized, the NEF shall then trigger the Nmbsf_MBSUserDataIngestSession service API of the MBSF to request the deletion of the corresponding MBS User Data Ingest Session at the MBSF, as specified in 3GPP TS 29.580 [66].

Upon reception of a successful response from the MBSF, as defined in 3GPP TS 29.580 [66], the NEF shall return a Nnef_MBSUserDataIngestSession_Delete response message with an HTTP "204 No Content" status code, as specified in clause 5.27.2.3.3.4.

On failure or if the NEF receives an error code from the MBSF, the NEF shall take proper error handling actions, as specified in clause 5.27.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a ProblemDetails data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.6.6 Procedure for MBS User Data Ingest Session Status Subscription

This procedure is used by an AF to subscribe to MBS User Data Ingest Session status event(s) reporting at the NEF.

In order to request the creation of an MBS User Data Ingest Session Status Subscription, an AF shall send a Nnef_MBSUserDataIngestSession_StatusSubscribe request message to the NEF using the HTTP POST method and targeting the "MBS User Data Ingest Session Status Subscriptions" collection resource, with the request message body including the MBSUserDataIngStatSubsc data structure, as specified in clause 5.27.2.4.3.2.

The NEF shall then check whether the AF is authorized to perform this operation or not. If the AF is authorized, the NEF shall then trigger the Nmbsf_MBSUserDataIngestSession API of the MBSF to request the creation of the corresponding MBS User Data Ingest Session Status Subscription at the MBSF, as specified in 3GPP TS 29.580 [66].

Upon reception of a successful response from the MBSF, as defined in 3GPP TS 29.580 [66], the NEF shall return a Nnef_MBSUserDataIngestSession_StatusSubscribe response message with an HTTP "201 Created" status code including a "Location" header field that shall contain the URI of the created resource, and the response body containing a representation of the created "Individual MBS User Data Ingest Session Status Subscription" resource within the MBSUserDataIngStatSubsc data structure, as specified in clause 5.27.2.4.3.2.

On failure or if the NEF receives an error response from the MBSF, the NEF shall take proper error handling actions, as specified in clause 5.27.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a ProblemDetails data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.6.7 Procedure for MBS User Data Ingest Session Status update/modification

This procedure is used by an AF to request the update/modification of an existing MBS User Data Ingest Session Status Subscription at the NEF.

In order to request the update of an existing MBS User Data Ingest Session Status Subscription, an AF shall send a Nnef_MBSUserDataIngestSession_StatusSubscribeMod request message using the HTTP PUT method and targeting the URI of the corresponding "Individual MBS User Data Ingest Session Status Subscription" resource, with the request body including the MBSUserDataIngStatSubsc data structure, as specified in clause 5.27.2.5.3.2.

In order to request the modification of an existing MBS User Data Ingest Session Status Subscription, an AF shall send a Nnef_MBSUserDataIngestSession_StatusSubscribeMod request message using the HTTP PATCH method and targeting the URI of the corresponding "Individual MBS User Data Ingest Session Status Subscription" resource, with the request body including the MBSUserDataIngStatSubscPatch data structure, as specified in clause 5.27.2.5.3.3.

The NEF shall then check whether the AF is authorized to perform this operation or not. If the AF is authorized, the NEF shall then trigger the Nmbsf_MBSUserDataIngestSession service API of the MBSF to request the update/modification of the corresponding MBS User Data Ingest Session Status Subscription at the MBSF, as specified in 3GPP TS 29.580 [66].

Upon reception of a successful response from the MBSF, as defined in 3GPP TS 29.580 [66], the NEF shall return a `Nnef_MBSUserDataIngestSession_StatusSubscribeMod` response message with an HTTP "200 OK" status code with the response body containing a representation of the updated Individual MBS User Data Ingest Session resource within the `MBSUserDataIngStatSubsc` data structure, or an HTTP "204 No Content" status code, as specified in clause 5.27.2.5.3.2 or clause 5.27.2.5.3.3.

On failure or if the NEF receives an error code from the MBSF, the NEF shall take proper error handling actions, as specified in clause 5.27.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a `ProblemDetails` data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.6.8 Procedure for MBS User Data Ingest Session Status Unsubscription

This procedure is used by an AF to request the deletion of an existing MBS User Data Ingest Session Status Subscription at the NEF.

In order to request the deletion of an existing MBS User Data Ingest Session Status Subscription, an AF shall send a `Nnef_MBSUserDataIngestSession_StatusUnsubscribe` request message using the HTTP DELETE method and targeting the URI of the concerned Individual MBS User Data Ingest Session Stats Subscription resource, as specified in clause 5.27.2.5.3.4.

The NEF shall then check whether the AF is authorized to perform this operation or not. If the AF is authorized, the NEF shall then trigger the `Nmbfsf_MBSUserDataIngestSession` service API of the MBSF to request the deletion of the corresponding MBS User Data Ingest Session Status Subscription at the MBSF, as specified in 3GPP TS 29.580 [66].

Upon reception of a successful response from the MBSF, as defined in 3GPP TS 29.580 [66], the NEF shall return a `Nnef_MBSUserDataIngestSession_StatusUnsubscribe` response message with an HTTP "204 No Content" status code, as specified in clause 5.27.2.5.3.4.

On failure or if the NEF receives an error code from the MBSF, the NEF shall take proper error handling actions, as specified in clause 5.27.7, and respond to the AF with an appropriate error status code. If the NEF received within an error response a `ProblemDetails` data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.29.6.9 Procedure for MBS User Data Ingest Session Status Notification

This procedure is used by the NEF to send MBS User Data Ingest Session status change notifications to a previously subscribed AF.

Upon reception of an MBS User Data Ingest Session Status Notification from the MBSF, as specified in 3GPP TS 29.580 [66], the NEF shall relay this notification to the AF by sending a `Nnef_MBSUserDataIngestSession_StatusNotify` request message to the AF using the HTTP POST method and targeting the notification URI provided by the AF during the creation of the corresponding MBS User Data Ingest Session Status Subscription, with the request body including the `MBSUserDataIngStatNotif` data structure, as specified in clause 5.27.4.2.3.1.

Upon successful reception of this notification request, the AF shall acknowledge its successful reception by sending a `Nnef_MBSUserDataIngestSession_StatusNotify` response message with an HTTP "204 No Content" status code, as specified in clause 5.27.4.2.3.1.

On failure, the AF shall take proper error handling actions, as specified in subclause 5.27.7, and respond to the NEF with an appropriate error status code.

4.4.30 Procedures for Data Reporting

4.4.30.1 General

The procedures in this clause are used by an AF to obtain data collection and reporting information and provide Data Reports, as defined in clause 4.2 of 3GPP TS 26.531 [59] and 3GPP TS 26.532 [60].

4.4.30.2 Procedure for Data Reporting Session Management

This procedure is used by an AF to request the creation/update/deletion of a Data Reporting Session in order to obtain data collection and reporting information.

In order to request the creation of a Data Reporting Session, an AF shall send a Nnef_DataReporting_Create request to the NEF using the HTTP POST method, targeting the "Data Reporting Sessions" collection resource with the request message body including the DataReportingSession data structure as defined in clause 5.23.2.2.3.1.

In order to read an existing Individual Data Reporting Session, an AF shall send a Nnef_DataReporting_Retrieve request to the NEF using the HTTP GET method, targeting the concerned "Individual Data Reporting Session" resource. If successful, the response message body contains the requested DataReportingSession data structure as defined in clause 5.23.2.3.3.1.

In order to request the update of an existing Data Reporting Session, an AF shall send a Nnef_DataReporting_Update request to the NEF using the HTTP PUT method, targeting the concerned "Individual Data Reporting Session" resource with the request message body including the updated resource representation within the DataReportingSession data structure as defined in clause 5.23.2.3.3.2.

In order to request the deletion of an existing Data Reporting Session, an AF shall send a Nnef_DataReporting_Delete request to the NEF using the HTTP DELETE method, targeting the concerned "Individual Data Reporting Session" resource as defined in clause 5.23.2.3.3.3.

At the reception of the HTTP POST GET/PUT/DELETE requests from the AF, the NEF shall trigger the necessary interaction with the DCAF as specified in 3GPP TS 26.532 [60] and:

- for an HTTP GET request, retrieve the requested "Individual Data Reporting Session" resource and respond to the AF with an HTTP "200 OK" status code;
- for an HTTP POST request, create a new "Individual Data Reporting Session" resource and respond to the AF with an HTTP "200 OK" status code including an HTTP Location header field containing the URI of the created resource and the response body including a representation of the created "Individual Data Reporting Session" resource within the DataReportingSession data structure;
- for an HTTP PUT request, update the concerned "Individual Data Reporting Session" resource and respond to the AF with an HTTP "200 OK" status code with the response body including a representation of the updated "Individual Data Reporting Session" resource within the DataReportingSession data structure; and
- for an HTTP DELETE request, delete the corresponding "Individual Data Reporting Session" resource, and respond to the AF with an HTTP "204 No Content" status code.

4.4.30.3 Procedure for Data Report

This procedure is used by an AF to send collected UE Data Reports to the NEF.

In order to send a collected UE Data Report, an AF shall use the "Report" custom operation. The AF shall send for this purpose an HTTP POST request targeting the URI "{apiRoot}/3gpp-data-reporting/v1/sessions/{sessionId}/report", with the request message body including the DataReport data structure specified in 3GPP TS 26.532 [60]. Upon successful reception of the report, the NEF shall respond to the AF with an HTTP "200 OK" status code.

4.4.31 Procedures for Data Reporting Provisioning

4.4.31.1 General

The procedures in this clause are used by an AF to supply data collection and reporting provisioning information in the form of Data Reporting Provisioning resources, as defined in clause 4.2 of 3GPP TS 26.531 [59] and 3GPP TS 26.532 [60].

4.4.31.2 Procedure for Data Reporting Provisioning Session Management

This procedure is used by an AF to request the creation/deletion of a Data Reporting Provisioning Session in order to supply data collection and reporting provisioning information.

In order to request the creation of a Data Reporting Provisioning Session, an AF shall send a `Nnef_DataReportingProvisioning_Create` request to the NEF using the HTTP POST method and targeting the "Data Reporting Provisioning Sessions" collection resource, with the request message body including the `DataReportingProvisioningSession` data structure as defined in clause 5.24.2.2.3.1.

In order to read an existing "Individual Data Reporting Provisioning Session" resource, an AF shall send a `Nnef_DataReportingProvisioning_Retrieve` request to the NEF using the HTTP GET method and targeting the concerned "Individual Data Reporting Provisioning Session" resource, as defined in clause 5.24.2.3.3.1.

In order to request the deletion of an existing Data Reporting Provisioning Session, an AF shall send a `Nnef_DataReportingProvisioning_Delete` request to the NEF using the HTTP DELETE method and targeting the concerned "Individual Data Reporting Provisioning Session" resource as defined in clause 5.24.2.3.3.3.

At the reception of the HTTP POST/GET/DELETE request from the AF, the NEF shall trigger the necessary interactions with the DCAF as specified in 3GPP TS 26.532 [60] and:

- for an HTTP POST request, create a new "Individual Data Reporting Provisioning Session" resource and respond to the AF with an HTTP "200 OK" status code including an HTTP Location header field containing the URI of the created resource and the response body including a representation of the created "Individual Data Reporting Provisioning Session" resource within the `DataReportingProvisioningSession` data structure;
- for an HTTP GET request, respond to the AF with an HTTP "200 OK" status code with the response body including the representation of the requested "Individual Data Reporting Provisioning Session" resource within the `DataReportingProvisioningSession` data structure; and
- for an HTTP DELETE request, delete the corresponding "Individual Data Reporting Provisioning Session" resource and respond to the AF with an HTTP "204 No Content" status code.

4.4.31.3 Procedure for Data Reporting Configuration management

This procedure is used by an AF to manage Data Reporting Configuration.

In order to request the creation of a Data Reporting Configuration, an AF shall send a `Nnef_DataReportingProvisioning_CreateConfiguration` request to the NEF using the HTTP POST method and targeting the "Data Reporting Configurations" collection resource, with the request message body including the `DataReportingConfiguration` data structure as defined in clause 5.24.2.5.3.1.

In order to read an existing Data Reporting Configuration, an AF shall send a `Nnef_DataReportingProvisioning_RetrieveConfiguration` request to the NEF using the HTTP GET method and targeting the concerned "Individual Data Reporting Configuration" resource, as defined in clause 5.24.2.4.3.1.

In order to request the update of an existing Data Reporting Configuration, an AF shall send a `Nnef_DataReportingProvisioning_UpdateConfiguration` request to the NEF using the HTTP PUT method, targeting the concerned "Individual Data Reporting Configuration" resource with the request message body including the updated resource representation within the `DataReportingConfiguration` data structure as defined in clause 5.24.2.5.3.3.

In order to request the modification of an existing Data Reporting Configuration, an AF shall send a `Nnef_DataReportingProvisioning_UpdateConfiguration` request to the NEF using the HTTP PATCH method and targeting the concerned "Individual Data Reporting Configuration" resource with the request message body containing the `DataReportingConfigurationPatch` data structure, as defined in clause 5.24.2.5.3.3A.

In order to request the deletion of an existing Data Reporting Configuration, an AF shall send a `Nnef_DataReportingProvisioning_DeleteConfiguration` request to the NEF using the HTTP DELETE method and targeting the concerned "Individual Data Reporting Configuration" resource as defined in clause 5.24.2.5.3.4.

At the reception of the HTTP POST/GET/PUT/PATCH/DELETE requests from the AF, the NEF shall trigger the necessary interactions with the DCAF as specified in 3GPP TS 26.532 [60] and:

- for an HTTP POST request, create a new "Individual Data Reporting Configuration" resource and respond to the AF with an HTTP "200 OK" status code including an HTTP Location header field containing the URI of the created resource and the response body including a representation of the created "Data Reporting Configuration" resource within the `DataReportingConfiguration` data structure;

- for an HTTP GET request, respond to the AF with an HTTP "200 OK" status code with the response body including the representation of the requested "Individual Data Reporting Configuration" resource within the DataReportingConfiguration data structure;
- for an HTTP PUT/PATCH request, update/modify the concerned "Individual Data Reporting Configuration" resource and respond to the AF with an HTTP "200 OK" status code with the response body including a representation of the updated/modified "Individual Data Reporting Configuration" resource within the DataReportingConfiguration data structure, or with an HTTP "204 No Content" status code; and
- for an HTTP DELETE request, delete the corresponding "Individual Data Reporting Configuration" resource and respond to the AF with an HTTP "204 No Content" status code.

4.4.32 Procedures for AF specific UE ID retrieval

4.4.32.1 General

The procedures described in the clauses below are used by an AF to request the NEF to provide an AF specific UE ID, as described in clause 4.15.10 of 3GPP TS 23.502 [2].

4.4.32.2 Retrieve AF specific UE ID service operation

In order to retrieve AF specific UE ID information, the AF shall send an HTTP POST request message to the NEF targeting the resource URI "{apiRoot}/3gpp-ueid/v1/retrieve", with the request body including the UeIdReq data structure.

Upon reception of the HTTP POST request message from the AF, the NEF shall check whether the AF is authorized to perform this operation or not:

- if AF is not authorized, the NEF shall respond to the AF with a "403 Forbidden" status code with the response body including the ProblemDetails data structure containing the "cause" attribute set to the "REQUEST_NOT_AUTHORIZED" application error indicating the AF authorisation failure; and
- if the AF's request is authorized, then if the DNN and/or S-NSSAI information is not available in the request, the NEF shall determine the corresponding DNN and/or S-NSSAI information based on the requesting AF Identifier, and if provided, the MTC Provider Information.

The NEF shall then interact with the BSF using the UE address and IP domain (if the UE IPv4 address is provided), DNN and/or S-NSSAI to retrieve the session binding information of the UE by invoking the Nbsf_Management_Discovery service operation, as described in 3GPP TS 29.521 [9].

If the NEF receives an error response from the BSF, the NEF shall respond to the AF with a proper error status code. If the NEF received from the BSF an error response including a "ProblemDetails" data structure with the "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error. If no SUPI matching the provided UE information is returned by the BSF, the NEF shall respond to the AF with a "404 Not Found" status code with the response body including a ProblemDetails data structure containing the "cause" attribute set to the "UE_NOT_FOUND" application error to indicate that the requested UE address is not found.

Upon success and a SUPI is returned by the BSF, the NEF shall then interact with UDM to retrieve the AF specific UE Identifier using the received SUPI and at least one of the Application Port ID, MTC Provider Information or AF Identifier information by invoking Nudm_SDM_Get service, as described in clause 5.2.2.2 of 3GPP TS 29.503 [17]. Upon success, the UDM responds to the NEF with the AF specific UE Identifier represented as an External Identifier for the UE which is uniquely associated with the Application Port ID, MTC provider Information and/or AF Identifier. The NEF shall then respond to the AF with the received information, i.e. the AF specific UE Identifier represented as an External Identifier that was received from the UDM.

If the NEF receives an error response from the UDM, the NEF shall respond to the AF with a proper error status code. If the NEF received from the UDM an error response including a "ProblemDetails" data structure with the "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error. If the UDM indicates that the requested UE Identifier is not available in the subscription data, the NEF shall respond to the AF with a "404 Not Found" error status code with the response body including a ProblemDetails data structure containing the "cause" attribute set to the "UE_ID_NOT_AVAILABLE" application error to indicate that the AF specific UE ID is not available.

NOTE: The case where UE's IP address provided by the AF to the NEF corresponds to an IP address that has been NATed (Network and Port Address Translation) is not supported in this release of the specification.

4.4.33 Procedures for Media Streaming Event Exposure

4.4.33.1 General

The procedures described in the clauses below are used by an external/untrusted event consumer AF to subscribe, update and delete a subscription to Media Streaming Exposure event(s) reporting via the NEF, also for a data collection AF to notify the observed Media Streaming event(s) which has been subscribed, as defined in 3GPP TS 26.512 [67].

4.4.33.2 Procedure for Media Streaming Event Exposure Subscription Creation

This procedure is used by an event consumer AF to subscribe to at least one Media Streaming Exposure event at the NEF.

In order to subscribe to at least one Media Streaming Exposure event, an event consumer AF shall send a Nnef_MSEventExposure_Subscribe request message to the NEF using the HTTP POST method and targeting the "Media Streaming Event Exposure Subscriptions" collection resource, with the request message body including the AfEventExposureSubsc data structure, as specified in clause 5.28.2.2.3.2.

The NEF shall then check whether the event consumer AF is authorized to perform this operation or not. If the event consumer AF is authorized, the NEF shall then trigger the Naf_EventExposure API of the data collection AF to request the creation of the corresponding Application Event Subscriptions at the AF, as specified in 3GPP TS 29.517 [58].

Upon reception of a successful response from the data collection AF, as defined in 3GPP TS 29.517 [58], the NEF shall return a Nnef_MSEventExposure_Subscribe response message with an HTTP "201 Created" status code including a "Location" header field that shall contain the URI of the created resource, i.e. "{apiRoot}/3gpp-ms-event-exposure/v1/subscriptions/{subscriptionId}", and the response body containing a representation of the created "Individual Media Streaming Event Exposure Subscription" resource within the AfEventExposureSubsc data structure, as specified in clause 5.28.2.2.3.2.

On failure or if the NEF receives an error response from the data collection AF, the NEF shall take proper error handling actions, as specified in clause 5.28.7, and respond to the event consumer AF with an appropriate error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.33.3 Procedure for Media Streaming Event Exposure Subscription Update

This procedure is used by an event consumer AF to update an existing Media Streaming Event Exposure Subscription at the NEF.

In order to update an existing Media Streaming Event Exposure Subscription, the event consumer AF shall send a Nnef_MSEventExposure_Subscribe request message to the NEF using the HTTP PUT method and targeting the "Individual Media Streaming Event Exposure Subscription" resource, with the request message body including the AfEventExposureSubsc data structure, as specified in clause 5.28.2.3.3.2.

The NEF shall then check whether the event consumer AF is authorized to perform this operation or not. If the event consumer AF is authorized, the NEF shall then trigger the Naf_EventExposure API of the data collection AF to request the update of the corresponding Individual Application Event Subscription at the AF, as specified in 3GPP TS 29.517 [58].

Upon reception of a successful response from the data collection AF, as defined in 3GPP TS 29.517 [58], the NEF shall return a Nnef_MSEventExposure_Subscribe response message with an HTTP "200 OK" status code with the AfEventExposureSubsc data structure or "204 No Content" status code, as specified in clause 5.28.2.3.3.2.

On failure or if the NEF receives an error response from the data collection AF, the NEF shall take proper error handling actions, as specified in clause 5.28.7, and respond to the event consumer AF with an appropriate error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.33.4 Procedure for Media Streaming Event Exposure Unsubscription

This procedure is used by an event consumer AF to request the deletion of an existing Media Streaming Event Exposure Subscription at the NEF.

In order to request the deletion of an existing Media Streaming Event Exposure Subscription, an event consumer AF shall send a Nnef_MSEventExposure_Unsubscribe request message using the HTTP DELETE method and targeting the URI of the concerned "Individual Media Streaming Event Exposure Subscription" resource.

The NEF shall then check whether the event consumer AF is authorized to perform this operation or not. If the AF is authorized, the NEF shall then trigger the Naf_EventExposure service API of the data collection AF to request the deletion of the corresponding Application Event Subscription at the AF, as specified in 3GPP TS 29.517 [58].

Upon reception of a successful response from the data collection AF, as defined in 3GPP TS 29.517 [58], the NEF shall return a Nnef_MSEventExposure_Unsubscribe response message with an HTTP "204 No Content" status code.

On failure or if the NEF receives an error code from the data collection AF, the NEF shall take proper error handling actions, as specified in clause 5.28.7, and respond to the event consumer AF with an appropriate error status code. If the NEF received within an error response a "ProblemDetails" data structure with a "cause" attribute indicating an application error, the NEF shall relay this error response to the AF with a corresponding application error, when applicable.

4.4.33.5 Procedure for Media Streaming Event Exposure Notification

This procedure is used by the NEF to send a Media Streaming Event Exposure notification to a previously subscribed event consumer AF.

In order to send a Media Streaming Event Exposure notification, the NEF shall send a Nnef_MSEventExposure_Notify request message to the AF using the HTTP POST method and targeting the notification URI provided during the creation/update of the corresponding subscription, with the request body including the AfEventExposureNotif data structure as specified in clause 5.28.4.2.3.1.

Upon success, the event consumer AF shall send a Nnef_MSEventExposure_Notify response message with an HTTP "204 No Content" status code.

On failure, the event consumer AF shall take proper error handling actions, as specified in subclause 5.28.7, and respond to the NEF with an appropriate error status code.

5 NEF Northbound APIs

5.1 Introduction

The NEF Northbound APIs are a set of APIs defining the related procedures and resources for the interaction between the NEF and the AF.

Tables 5.1-1 summarizes the APIs defined in this specification.

Table 5.1-1: API Descriptions

Service Name	Clause defined	Description	OpenAPI Specification File	API Name	Annex
TrafficInfluence	5.4	Traffic Influence API	TS29522_TrafficInfluence.yaml	3gpp-traffic-influence	A.2
NiddConfigurationTrigger	5.5	NIDD (Non-IP Data Delivery) Configuration Trigger API	TS29522_NiddConfigurationTrigger.yaml	3gpp-nidd-configuration-trigger	A.3
AnalyticsExposure	5.6	Analytics Exposure API	TS29522_AnalyticsExposure.yaml	3gpp-analyticsexposure	A.4
5GLANParameterProvision	5.7	5G LAN Parameter Provision API	TS29522_5GLANParameterProvision.yaml	3gpp-5glan-pp	A.5
ApplyingBdtPolicy	5.8	Applying BDT Policy API	TS29522_ApplyingBdtPolicy.yaml	3gpp-applying-bdt-policy	A.6
IPTVConfiguration	5.9	IPTV Configuration API	TS29522_IPTVConfiguration.yaml	3gpp-iptvconfiguration	A.7
LpiParameterProvision	5.10	LPI (Location Privacy Indicator) Parameter Provision API	TS29522_LpiParameterProvision.yaml	3gpp-lpi-pp	A.8
ServiceParameter	5.11	Service Parameter API	TS29522_ServiceParameter.yaml	3gpp-service-parameter	A.9
ACSPParameterProvision	5.12	ACS Parameter Provision API	TS29522_ACSPParameterProvision.yaml	3gpp-acs-pp	A.10
MoLcsNotify	5.13	MO LCS Notify API	TS29522_MoLcsNotify.yaml	3gpp-mo-lcs-notify	A.11
AKMA	5.14	AKMA API	TS29522_AKMA.yaml	3gpp-akma	A.12
TimeSyncExposure	5.15	Time Sync Exposure API	TS29522_TimeSyncExposure.yaml	3gpp-time-sync-exposure	A.13
EcsAddressProvision	5.16	ECS Address Provision API	TS29522_EcsAddressProvision.yaml	3gpp-ecs-address-provision	A.14
AMPolicyAuthorization	5.17	AM Policy Authorization API	TS29522_AMPolicyAuthorization.yaml	3gpp-am-policyauthorization	A.15
AMInfluence	5.18	AM Influence API	TS29522_AMInfluence.yaml	3gpp-am-influence	A.16
MBSTMGI	5.19	MBS TMGI API	TS29522_MBSTMGI.yaml	3gpp-mbs-tmgi	A.17
MBSSession	5.20	MBS Session API	TS29522_MBSSession.yaml	3gpp-mbs-session	A.18
EASDeployment	5.21	EAS Deployment API	TS29522_EASDeployment.yaml	3gpp-eas-deployment	A.19
ASTI	5.22	ASTI API	TS29522_ASTI.yaml	3gpp-asti	A.20
DataReporting	5.23	DataReporting API	TS29522_DataReporting.yaml	3gpp-data-reporting	A.21
DataReportingProvisioning	5.24	DataReportingProvisioning API	TS29522_DataReportingProvisioning.yaml	3gpp-data-reporting-provisioning	A.22
UEId	5.25	UE ID API	TS29522_UEId.yaml	3gpp-ueid	A.23
MBSUserService	5.26	MBSUserService API	TS29522_MBSUserService.yaml	3gpp-mb-us	A.24
MBSUserDataIngestSession	5.27	MBSUserDataIngestSession API	TS29522_MBSUserDataIngestSession.yaml	3gpp-mb-ud-ingest	A.25
MSEventExposure	5.28	MSEventExposure API	TS29522_MSEventExposure.yaml	3gpp-event-exposure	A.26

5.2 Information applicable to several APIs

The usage of HTTP, content type and URI structure definition, as specified in clauses 5.2.2, 5.2.3 and 5.2.4 of 3GPP TS 29.122 [4] respectively, shall be applicable for NEF Northbound APIs.

The notification, error handling, feature negotiation, HTTP custom headers as specified in clauses 5.2.5, 5.2.6, 5.2.7, 5.2.8 of 3GPP TS 29.122 [4] respectively, shall be applicable for NEF Northbound APIs except that the SCEF is replaced by the NEF and the SCS/AS is replaced by the AF.

The conventions for Open API specification files as specified in clause 5.2.9 of 3GPP TS 29.122 [4] shall be applicable for NEF Northbound APIs.

5.3 Reused APIs

This clause describes the northbound APIs which are applicable for both EPS and 5GS.

Table 5.3-1: Reused APIs applicable for both EPS and 5GS

API Name	Differences
ResourceManagementOfBdt	- The following features as described in clause 5.4.4 of 3GPP TS 29.122 [4] may only be supported in 5G: "LocBdt_5G", "Group_Id", "BdtNotification_5G".
PfdManagement	The following features as described in clause 5.11.4 of 3GPP TS 29.122 [4] may only be supported in 5G: "FailureLocation_5G".
MonitoringEvent	- The following features as described in clause 5.3.4 of 3GPP TS 29.122 [4] may only be supported in 5G: "Number_of_UEs_in_an_area_notification_5G", "Downlink_data_delivery_status_5G", "Availability_after_DDN_failure_notification_enhancement", "eLCS", "NSAC", "MULTIQOS", "EDGEAPP", "UEId_retrieval". - For the "Pdn_connectivity_status" feature, APN is equivalent to DNN; the non-IP PDN type is equivalent to the unstructured PDU session type; and the enumeration InterfaceIndication value "PDN_GATEWAY" stands for PDU session anchored in UPF in 5G.
DeviceTriggering	
CpProvisioning	- The following features as described in clause 5.10.4 of 3GPP TS 29.122 [4] may only be supported in 5G: "ExpectedUMT_5G", "ExpectedUmtTime_5G", "ScheduledCommType_5G", "UEId_retrieval".
ChargeableParty	- The following features as described in clause 5.5.4 of 3GPP TS 29.122 [4] may only be supported in 5G: "EthChgParty_5G", "MacAddressRange_5G". - The events (i.e. LOSS_OF_BEARER, RECOVERY_OF_BEARER and RELEASE_OF_BEARER) do not apply for 5G.
AsSessionWithQoS	- The following features as described in clause 5.14.4 of 3GPP TS 29.122 [4] may only be supported in 5G: "EthAsSessionQoS_5G", "QoSMonitoring_5G", "PacketDelayFailureReport", "MacAddressRange_5G", "AlternativeQoS_5G", "TSC_5G", "DisableUENotification_5G", "ExposureToEAS", "AltQoSWithIndParams_5G", "EnEthAsSessionQoS_5G", "enNB_5G". - The events (i.e. LOSS_OF_BEARER, RECOVERY_OF_BEARER and RELEASE_OF_BEARER) do not apply for 5G.
MsisdnLessMoSms	
NpConfiguration	- The following features as described in clause 5.13.4 of 3GPP TS 29.122 [4] may only be supported in 5G: "NpExpiry_5G", "UEId_retrieval".
NIDD	
RacsParameterProvisioning	
ECRControl	- The following features as described in clause 5.12.4 of 3GPP TS 29.122 [4] may only be supported in 5G: "ECR_WB_5G".

5.4 TrafficInfluence API

5.4.1 Resources

5.4.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-traffic-influence/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-traffic-influence" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.4.1.1-1 and the resources and HTTP methods used for the TrafficInfluence API.

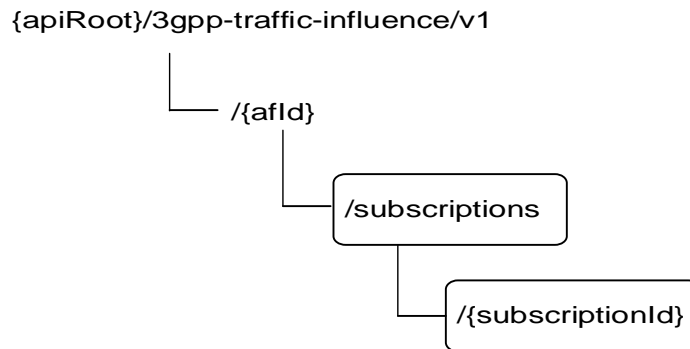


Figure 5.4.1.1-1: Resource URI structure of the TrafficInfluence API

Table 5.4.1.1-1 provides an overview of the resources and HTTP methods applicable for the TrafficInfluence API.

Table 5.4.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
Traffic Influence Subscription	/{afId}/subscriptions	GET	Read all subscriptions for a given AF
		POST	Create a new subscription to traffic influence
Individual Traffic Influence Subscription	/{afId}/subscriptions/{subscriptionId}	GET	Read a subscription to traffic influence
		PUT	Modify all of the properties of an existing subscription to traffic influence
		PATCH	Modify part of the properties of an existing subscription to traffic influence
		DELETE	Delete a subscription to traffic influence

5.4.1.2 Resource: Traffic Influence Subscription

5.4.1.2.1 Introduction

This resource allows a AF to read all active traffic influence subscriptions for the given AF.

5.4.1.2.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-traffic-influence/v1/{afId}/subscriptions**

This resource shall support the resource URI variables defined in table 5.4.1.2.2-1.

Table 5.4.1.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.

5.4.1.2.3 Resource Methods

5.4.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.4.1.2.2.

5.4.1.2.3.2 GET

The GET method allows to read all active subscriptions for a given AF. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.4.1.2.3.2-1.

Table 5.4.1.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.4.1.2.3.2-2 and the response data structures and response codes specified in table 5.4.1.2.3.2-3.

Table 5.4.1.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.4.1.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(TrafficInfluSub)	M	0..N	200 OK	The subscription information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.4.1.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.4.1.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.4.1.2.3.3 POST

The POST method creates a new subscription resource to traffic influence subscription for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.4.1.2.3.3-1 and the response data structures and response codes specified in table 5.4.1.2.3.3-2.

Table 5.4.1.2.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
TrafficInfluSub	M	1	Parameters to register a subscription to influencing traffic routing and/or notification about UP management events with the NEF.

Table 5.4.1.2.3.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
TrafficInfluSub	M	1	201 Created	The subscription was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.4.1.2.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-traffic-influence/v1/{afId}/subscriptions/{subscriptionId}

5.4.1.3 Resource: Individual Traffic Influence Subscription

5.4.1.3.1 Introduction

This resource allows a AF to register a subscription to influencing traffic routing and/or notification about UP management events with the NEF.

5.4.1.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-traffic-influence/v1/{afId}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.4.1.3.2-1.

Table 5.4.1.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.
subscriptionId	string	Identifier of the subscription.

5.4.1.3.3 Resource Methods

5.4.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.4.1.3.2.

5.4.1.3.3.2 GET

The GET method allows to read the active subscription for a given AF and subscription Id. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.4.1.3.3.2-1.

Table 5.4.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.4.1.3.3.2-2 and the response data structures and response codes specified in table 5.4.1.3.3.2-3.

Table 5.4.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.4.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
TrafficInfluSub	M	1	200 OK	The subscription information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.4.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.4.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.4.1.3.3.3 PUT

The PUT method is used to replace an existing subscription resource to update a subscription. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.4.1.3.3.3-1 and the response data structures and response codes specified in table 5.4.1.3.3.3-2.

Table 5.4.1.3.3.3-1: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
TrafficInfluSub	M	1	Modify an existing subscription to influencing traffic routing and/or notification about UP management events with the NEF.

Table 5.4.1.3.3.3-2: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
TrafficInfluSub	M	1	200 OK	The subscription was replaced successfully and a representation is returned.
N/A			204 No Content	The subscription was replaced successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.4.1.3.3.3-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.4.1.3.3.3-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.4.1.3.3.4 PATCH

The PATCH method allows to change some properties of an existing traffic influence subscription. The AF shall initiate the HTTP PATCH request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.4.1.3.3.4-1 and the response data structures and response codes specified in table 5.4.1.3.3.4-2.

Table 5.4.1.3.3.4-1: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
TrafficInfluSubPatch	M	1	Partial update of a subscription to influencing traffic routing and/or notifications about UP management events with the NEF.

Table 5.4.1.3.3.4-2: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
TrafficInfluSub	M	1	200 OK	The subscription was partial modified successfully and a representation is returned.
N/A			204 No Content	The subscription was partial modified successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.4.1.3.3.4-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.4.1.3.3.4-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.4.1.3.3.5 DELETE

The DELETE method deletes the traffic influence subscription for a given AF. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.4.1.3.3.5-1.

Table 5.4.1.3.3.5-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.4.1.3.3.5-2 and the response data structures and response codes specified in table 5.4.1.3.3.5-3.

Table 5.4.1.3.3.5-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.4.1.3.3.5-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The subscription was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.4.1.3.3.5-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.4.1.3.3.5-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.4.2 Notifications

5.4.2.1 Introduction

Upon receipt of a UP management event notification from the SMF indicating the subscribed event (e.g. a DNAI has changed) is detected, the NEF shall send an HTTP POST message including the notified event to the AF.

Upon receipt of the event notification, the AF may send an HTTP POST request as acknowledgement for the UP path management event notification to inform the NEF about the result of application layer relocation.

The NEF and the AF shall support the notification mechanism as described in clause 5.2.5 of 3GPP TS 29.122 [4].

Table 5.4.2.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Event Notification	{notificationDestination}	POST	The UP management event notification from the NEF to the AF.
Acknowledgement of event notification	{afAckUri}	POST	The Acknowledgement of Event Notification is used by the AF to acknowledge the NEF about handling result of the event notification.

5.4.2.2 Event Notification

5.4.2.2.1 Description

The Event Notification is used by the NEF to report the UP path management event notification from the SMF to the AF.

5.4.2.2.2 Target URI

The Callback URI "{notificationDestination}" shall be used with the callback URI variables defined in table 5.4.2.2.2-1.

Table 5.4.2.2.2-1: Callback URI variables

Name	Data type	Definition
notificationDestination	Link	Callback reference provided by the AF during creation/modification of the subscription within the TrafficInfluSub data type as defined in table 5.4.3.3.2-1 or the TrafficInfluSubPatch data type as defined in table 5.4.3.3.3-1.

5.4.2.2.3 Operation Definition

5.4.2.2.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.4.2.2.3.1-1 and the response data structures and response codes specified in table 5.4.2.2.3.1-2.

Table 5.4.2.2.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
EventNotification	M	1	The UP management event notification is provided by the NEF to the AF.

Table 5.4.2.2.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The event notification is received successfully.
N/A			307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.4.2.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

Table 5.4.2.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

5.4.2.2.3.2 Notification via Websocket

If supported by both AF and NEF and successfully negotiated, the EventNotification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4 of 3GPP TS 29.122 [4].

5.4.2.3 Acknowledgement of event notification

5.4.2.3.1 Description

The Acknowledgement of Event Notification is used by the AF to acknowledge the NEF about handling result of the event notification (e.g. UP path change).

5.4.2.3.2 Target URI

The Callback URI "{afAckUri}" shall be used with the callback URI variables defined in table 5.4.2.3.2-1.

Table 5.4.2.3.2-1: Callback URI variables

Name	Data type	Definition
afAckUri	Link	Callback reference provided by the NEF during event notification within the EventNotification data type as defined in Table 5.4.3.3.4-1.

5.4.2.3.3 Operation Definition

5.4.2.3.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.4.2.3.3.1-1 and the response data structures and response codes specified in table 5.4.2.3.3.1-2.

Table 5.4.2.3.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AfAckInfo	M	1	Acknowledgement information of event notification.

Table 5.4.2.3.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The acknowledgement of event notification is received successfully.
N/A			307 Temporary Redirect	Temporary redirection, during acknowledgement of event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NEF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during acknowledgement of event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NEF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.4.2.3.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative NEF towards which the notification should be redirected.

Table 5.4.2.3.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative NEF towards which the notification should be redirected.

5.4.3 Data Model

5.4.3.1 General

This clause specifies the application data model supported by the TrafficInfluence API.

Table 5.4.3.1-1 specifies the data types defined for the TrafficInfluence API.

Table 5.4.3.1-1: TrafficInfluence API specific Data Types

Data type	Clause defined	Description	Applicability
AfAckInfo	5.4.3.3.6	Represents acknowledgement information of a traffic influence event notification.	
AfResultInfo	5.4.3.3.5	Identifies the result of application layer handling.	
AfResultStatus	5.4.3.4.4	Represents the status of application handling result.	
EventNotification	5.4.3.3.4	Represents a traffic influence event notification.	
SubscribedEvent	5.4.3.4.3	Represents the type of UP path management events for which the AF requests to be notified.	
TrafficInfluSub	5.4.3.3.2	Represents a traffic influence subscription.	
TrafficInfluSubPatch	5.4.3.3.3	Represents parameters to request the modification of a traffic influence subscription resource.	

5.4.3.2 Reused data types

The data types reused by the TrafficInfluence API from other specifications are listed in table 5.4.3.2-1.

Table 5.4.3.2-1: Re-used Data Types

Data type	Reference	Comments
Dnai	3GPP TS 29.571 [8]	Identifies a DNAI.
DnaiChangeType	3GPP TS 29.571 [8]	Describes the types of DNAI change.
Dnn	3GPP TS 29.571 [8]	Identifies a DNN.
DurationSec	3GPP TS 29.571 [8]	Identifies a period of time in units of seconds.
EasIpReplacementInfo	3GPP TS 29.571 [8]	Represents EAS IP replacement information.
EthFlowDescription	3GPP TS 29.514 [7]	Contains the Ethernet data flow information. (NOTE)
ExternalGroupId	3GPP TS 29.122 [4]	External Group Identifier for a user group.
FlowInfo	3GPP TS 29.122 [4]	Contains the IP data flow information.
GeographicalArea	Clause 5.17.3.3.4	Identifies a geographical area.
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
IpAddr	3GPP TS 29.571 [8]	Identifies an IP address.
Ipv4Addr	3GPP TS 29.122 [4]	Identifies an IPv4 address.
Ipv6Addr	3GPP TS 29.122 [4]	Identifies an IPv6 address.
Ipv6Prefix	3GPP TS 29.571 [8]	Identifies an IPv6 Prefix.
Link	3GPP TS 29.122 [4]	Identifies a referenced resource.
MacAddr48	3GPP TS 29.571 [8]	Identifies a MAC address.
ReportingInformation	3GPP TS 29.523 [22]	Represents the event reporting requirements.
RouteToLocation	3GPP TS 29.571 [8]	Describes the traffic routes to the locations of the application.
Snsai	3GPP TS 29.571 [8]	Identifies the S-NSSAI.
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.4.4-1.
TemporalValidity	3GPP TS 29.514 [7]	Indicates the time interval(s) during which the AF request is to be applied
UInteger	3GPP TS 29.571 [8]	Unsigned integer.
UIntegerRm	3GPP TS 29.571 [8]	This data type is defined in the same way as the "UInteger" data type, but with the OpenAPI "nullable: true" property.
WebsocketNotifConfig	3GPP TS 29.122 [4]	Contains the configuration parameters to set up notification delivery over Websocket protocol.
NOTE:	In order to support a set of MAC addresses with a specific range in the traffic filter, feature MacAddressRange as specified in clause 5.4.4 shall be supported.	

5.4.3.3 Structured data types

5.4.3.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.4.3.3.2 Type: TrafficInfluSub

This type represents a traffic influence subscription. The same structure is used in the subscription request and subscription response.

Table 5.4.3.3.2-1: Definition of type TrafficInfluSub

Attribute name	Data type	P	Cardinality	Description	Applicability (NOTE 1)
afServiceId	string	O	0..1	Identifies a service on behalf of which the AF is issuing the request.	
afAppId	string	O	0..1	Identifies an application. (NOTE 3)	
afTransId	string	O	0..1	Identifies an NEF Northbound interface transaction, generated by the AF.	
appReloInd	boolean	O	0..1	Identifies whether an application can be relocated once a location of the application has been selected. Set to "true" if it can be relocated; otherwise set to "false". Default value is "false" if omitted.	
dnn	Dnn	O	0..1	Identifies a DNN, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only.	
snssai	Snssai	O	0..1	Identifies an S-NSSAI.	
externalGroupId	ExternalGroupId	O	0..1	Identifies a group of users. (NOTE 2)	
anyUeInd	boolean	O	0..1	Identifies whether the AF request applies to any UE (i.e. all UEs). This attribute shall set to "true" if applicable for any UE, otherwise, set to "false". (NOTE 2)	
subscribedEvents	array(SubscribedEvent)	O	1..N	Identifies the requirement to be notified of the event(s).	
gpsi	Gpsi	O	0..1	Identifies a user. (NOTE 2)	
ipv4Addr	Ipv4Addr	O	0..1	Identifies the IPv4 address. (NOTE 2)	
ipDomain	string	O	0..1	The IPv4 address domain identifier. The attribute may only be provided if the ipv4Addr attribute is present.	
ipv6Addr	Ipv6Addr	O	0..1	Identifies the IPv6 address. (NOTE 2)	
macAddr	MacAddr48	O	0..1	Identifies the MAC address. (NOTE 2)	
dnaiChgType	DnaiChangeType	O	0..1	Identifies a type of notification regarding UP path management event.	
notificationDestination	Link	C	0..1	Contains the Callback URL to receive the notification from the NEF. It shall be present if the "subscribedEvents" is present.	
requestTestNotification	boolean	O	0..1	Set to true by the AF to request the NEF to send a test notification as defined in clause 5.2.5.3 of 3GPP TS 29.122 [4]. Set to false or omitted otherwise.	Notification_test_event

websocketNotifConfig	WebsocketNotifConfig	O	0..1	Configuration parameters to set up notification delivery over Websocket protocol.	Notification_w ebssocket
self	Link	C	0..1	Link to the created resource. This parameter shall be supplied by the NEF in HTTP responses that include an object of TrafficInfluSub type	
trafficFilters	array(FlowInfo)	O	1..N	Identifies IP packet filters. (NOTE 3)	
ethTrafficFilters	array(EthFlowDescription)	O	1..N	Identifies Ethernet packet filters. (NOTE 3)	
trafficRoutes	array(RouteToLocation)	O	1..N	Identifies the N6 traffic routing requirement.	
ffcCorrInd	boolean	O	0..1	Indication of traffic correlation. May only be included when "externalGroupId" attribute was included within the TrafficInfluSub data type previously. It is used to indicate that for the group of UEs, the targeted PDU sessions should be correlated by a common DNAI. Set to "true" if it should be correlated; otherwise set to "false". Default value is "false" if omitted. (NOTE 4)	
tempValidities	array(TemporalValidity)	O	1..N	Indicates the time interval(s) during which the AF request is to be applied.	
validGeoZonelds	array(string)	O	1..N	Identifies a geographic zone that the AF request applies only to the traffic of UE(s) located in this specific zone. This attribute is deprecated; the attribute "geoAreas" should be used instead.	
geoAreas	array(GeographicalArea)	O	1..N	Identifies geographical areas within which the AF request applies. This attribute deprecates validGeoZonelds attribute.	
afAckInd	boolean	O	0..1	Identifies whether the AF acknowledgement of UP path event notification is expected. Set to "true" if the AF acknowledge is expected; otherwise set to "false". Default value is "false" if omitted.	URLLC
addrPreserInd	boolean	O	0..1	Indicates whether UE IP address should be preserved. This attribute shall set to "true" if preserved, otherwise, set to "false". Default value is "false" if omitted.	URLLC

simConnInd	boolean	O	0..1	Indication of simultaneous connectivity temporarily maintained for the source and target PSA. If it is included and set to "true", temporary simultaneous connectivity should be kept. The default value "false" applies, if the attribute is not present and has not been supplied previously.	SimultConnectivity
simConnTerm	DurationSec	O	0..1	Indication of the minimum time interval to be considered for inactivity of the traffic routed via the source PSA during the edge re-location procedure. It may be included when the "simConnInd" attribute is set to true.	SimultConnectivity
maxAllowedUpLat	UInteger	O	0..1	Indicates the target user plane latency in units of milliseconds. The SMF may use this value to decide whether edge relocation is needed to ensure that the user plane latency does not exceed the value.	AF_lantency
easIpReplacInfos	array(EasIpReplacementInfo)	O	1..N	Contains EAS IP replacement information.	EASIPreplacement
easRedisInd	boolean	O	0..1	Indicates the EAS rediscovery is required for the application if it is included and set to "true". Default value is "false" if omitted. The indication shall be invalid after it was applied unless it is provided again.	EASDiscovery
eventReq	ReportingInformation	O	0..1	Indicates the event reporting requirements. This attribute may be provided if the "EDGEAPP" feature is supported and the "subscribedEvents" attribute is present.	EDGEAPP
eventReports	array(EventNotification)	C	1..N	Represents user plane path management event report(s). This attribute shall be present in an HTTP POST response if the immediate reporting indication in the "immRep" attribute within the "eventReq" attribute is set to true and the "subscribedEvents" was present in the corresponding HTTP POST request and the report(s) are available. This attribute may also be present in an HTTP PUT or PATCH response when the report(s) are available.	EDGEAPP
suppFeat	SupportedFeatures	C	0..1	Indicates the list of Supported features used as described in clause 5.4.4. This attribute shall be provided in the POST request and in the response of successful resource creation.	

NOTE 1:	Properties marked with a feature as defined in clause 5.4.4 are applicable as described in clause 5.2.7 of 3GPP TS 29.122 [4]. If no feature is indicated, the related property applies for all the features.
NOTE 2:	One of individual UE identifier (i.e. "gpsi", "macAddr", "ipv4Addr" or "ipv6Addr"), External Group Identifier (i.e. "externalGroupld") or any UE indication "anyUeInd" shall be included.
NOTE 3:	One of "afAppld", "trafficFilters" or "ethTrafficFilters" shall be included.
NOTE 4:	The indication of traffic correlation shall be provided only when the AF requires that all the PDU sessions related to the 5G VN group member UEs should be correlated by a common DNAI in the user plane for the traffic as described in 3GPP TS 23.501 [3], clause 5.6.7.1 and clause 5.29.

5.4.3.3.3 Type: TrafficInfluSubPatch

This type represents a subscription of traffic influence parameters provided by the AF to the NEF. The structure is used for HTTP PATCH request.

Table 5.4.3.3.3-1: Definition of type TrafficInfluSubPatch

Attribute name	Data type	P	Cardinality	Description	Applicability
appReloInd	boolean	O	0..1	Identifies whether an application can be relocated once a location of the application has been selected. (NOTE)	
trafficFilters	array(FlowInfo)	O	1..N	Identifies IP packet filters.	
ethTrafficFilters	array(EthFlowDescription)	O	1..N	Identifies Ethernet packet filters.	
trafficRoutes	array(RouteToLocation)	O	1..N	Identifies the N6 traffic routing requirement. (NOTE)	
tfCorrInd	boolean	O	0..1	Indication of traffic correlation. May only be included when "externalGroupID" attribute was included within the TrafficInfluSub data type previously. It is used to indicate that for the group of UEs, the targeted PDU sessions should be correlated by a common DNAI.	
tempValidities	array(TemporalValidity)	O	1..N	Indicates the time interval(s) during which the AF request is to be applied. (NOTE)	
validGeoZonelds	array(string)	O	1..N	Identifies a geographic zone that the AF request applies only to the traffic of UE(s) located in this specific zone. (NOTE) This attribute is deprecated; the attribute "geoAreas" should be used instead.	
geoAreas	array(GeographicalArea)	O	1..N	Identifies geographical areas within which the AF request applies. (NOTE) This attribute deprecates validGeoZonelds attribute.	
afAckInd	boolean	O	0..1	Identifies whether the AF acknowledgement of UP path event notification is expected. - "true" indicates that the AF acknowledgement of UP path event notification is expected. - "false" indicates that the AF acknowledgement of UP path event notification is not expected.	URLLC
addrPreserInd	boolean	O	0..1	Indicates whether the UE IP address shall be preserved. - "true" indicates the UE IP address shall be preserved. - "false" indicates the UE IP address shall not be preserved. (NOTE)	URLLC
simConnInd	boolean	O	0..1	Indication of simultaneous connectivity temporarily maintained for the source and target PSA. If it is included and set to "true", temporary simultaneous connectivity should be kept.	SimultConnectivity
simConnTerm	DurationSec	O	0..1	Indication of the minimum time interval to be considered for inactivity of the traffic routed via the source PSA during the edge re-location procedure.	SimultConnectivity

maxAllowedUpLat	UIntegerRm	O	0..1	Indicates the target user plane latency in units of milliseconds. The SMF may use this value to decide whether edge relocation is needed to ensure that the user plane latency does not exceed the value.	AF_latency
easIpReplaceInfos	array(EasIpReplacementInfo)	O	1..N	Contains EAS IP replacement information.	EASIPreplacement
easRedisInd	boolean	O	0..1	Indicates the EAS rediscovery is required for the application if it is included and set to "true". Default value is "false" if omitted. The indication shall be invalid after it was applied unless it is provided again.	EASDiscovery
notificationDestination	Link	O	0..1	Contains the Callback URL to receive the notification from the NEF.	
eventReq	ReportingInformation	O	0..1	Indicates the event reporting requirements. This attribute may be provided if the "EDGEAPP" feature is supported.	EDGEAPP
NOTE: The value of the property shall be set to NULL for removal.					

5.4.3.3.4 Type: EventNotification

Table 5.4.3.3.4-1: Definition of type EventNotification

Attribute name	Data type	P	Cardinality	Description	Applicability (NOTE 1)
afTransId	string	O	0..1	Identifies an NEF Northbound interface transaction, generated by the AF.	
dnaiChgType	DnaiChangeType	M	1	Identifies the type of notification regarding UP path management event.	
sourceTrafficRoute	RouteToLocation	O	0..1	Identifies the N6 traffic routing information associated to the source DNAI. May be present if the "subscribedEvent" sets to "UP_PATH_CHANGE". (NOTE 3)	
subscribedEvent	SubscribedEvent	M	1	Identifies a UP path management event the AF requested to be notified of.	
targetTrafficRoute	RouteToLocation	O	0..1	Identifies the N6 traffic routing information associated to the target DNAI. May be present if the "subscribedEvent" sets to "UP_PATH_CHANGE". (NOTE 3)	
sourceDnai	Dnai	O	0..1	Source DN Access Identifier. Shall be included for event "UP_PATH_CHANGE" if the DNAI changed (NOTE 2, NOTE 3).	
targetDnai	Dnai	O	0..1	Target DN Access Identifier. Shall be included for event "UP_PATH_CHANGE" if the DNAI changed (NOTE 2, NOTE 3).	
gpsi	Gpsi	O	0..1	Identifies a user.	
srcUelpv4Addr	Ipv4Addr	O	0..1	The IPv4 Address of the served UE for the source DNAI.	
srcUelpv6Prefix	Ipv6Prefix	O	0..1	The Ipv6 Address Prefix of the served UE for the source DNAI.	
tgtUelpv4Addr	Ipv4Addr	O	0..1	The IPv4 Address of the served UE for the target DNAI.	
tgtUelpv6Prefix	Ipv6Prefix	O	0..1	The Ipv6 Address Prefix of the served UE for the target DNAI.	
ueMac	MacAddr48	O	0..1	UE MAC address of the served UE.	
afAckUri	Link	O	0..1	The URI provided by the NEF for the AF acknowledgement. May only be included for event "UP_PATH_CHANGE".	URLLC
NOTE 1: Properties marked with a feature as defined in clause 5.4.4 are applicable as described in clause 5.2.7 of 3GPP TS 29.122 [4]. If no feature is indicated, the related property applies for all the features.					
NOTE 2: If the DNAI is not changed while the N6 traffic routing information is changed, the "sourceDnai" attribute and "targetDnai" attribute shall not be provided.					
NOTE 3: The change from the UP path status where no DNAI applies to a status where a DNAI applies indicates the activation of the related AF request and therefore only the target DNAI and N6 traffic routing information is provided in the event notification; the change from the UP path status where a DNAI applies to a status where no DNAI applies indicates the de-activation of the related AF request and therefore only the source DNAI and N6 traffic routing information is provided in the event notification.					

5.4.3.3.5 Type: AfResultInfo

Table 5.4.3.3.5-1: Definition of type AfResultInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
afStatus	AfResultStatus	M	1	Identifies the result of the application relocation.	
trafficRoute	RouteToLocation	O	0..1	Identifies the N6 traffic routing information associated to the target DNAI. May only be present if the "afStatus" sets to "SUCCESS".	
upBuffInd	boolean	O	0..1	If present and set to "true", it indicates that buffering of uplink traffic to the target DNAI is needed. The default value is "false". May only be present if the "afStatus" sets to "SUCCESS".	ULBuffering
easIpReplacInfos	array(EasIpReplacementInfo)	O	1..N	Contains EAS IP replacement information.	EASIPReplacement

5.4.3.3.6 Type AfAckInfo

Table 5.4.3.3.6-1: Definition of type AfAckInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
afTransId	string	C	0..1	Identifies an NEF Northbound interface transaction, generated by the AF. It shall be provided if the AF has previously provided it.	
ackResult	AfResultInfo	M	1	Identifies the result of application layer handling.	
gpsi	Gpsi	O	0..1	Identifies a GPSI.	

5.4.3.4 Simple data types and enumerations

5.4.3.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.4.3.4.2 Simple data types

The simple data types defined in table 5.4.3.4.2-1 shall be supported.

Table 5.4.3.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.4.3.4.3 Enumeration: SubscribedEvent

The enumeration SubscribedEvent represents the type of UP path management events for which the AF requests to be notified. It shall comply with the provisions defined in table 5.4.3.4.3-1.

Table 5.4.3.4.3-1: Enumeration SubscribedEvent

Enumeration value	Description
UP_PATH_CHANGE	The AF requests to be notified when the UP path changes for the PDU session.

5.4.3.4.4 Enumeration: AfResultStatus

The enumeration AfResultStatus represents the status of application handling result. It shall comply with the provisions defined in table 5.4.3.4.4-1.

Table 5.4.3.4.4-1: Enumeration AfResultStatus

Enumeration value	Description
SUCCESS	The application layer is ready or the relocation is completed.
TEMP_CONGESTION	The application relocation fails due to temporary congestion.
RELOC_NO_ALLOWED	The application relocation fails because application relocation is not allowed.
OTHER	The application relocation fails due to other reason.

5.4.4 Used Features

The table below defines the features applicable to the TrafficInfluence API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.4.4-1: Features used by TrafficInfluence API

Feature number	Feature Name	Description
1	Notification_websocket	The delivery of notifications over Websocket is supported as described in 3GPP TS 29.122 [4]. This feature requires that the Notification_test_event feature is also supported.
2	Notification_test_event	The testing of notification connection is supported as described in 3GPP TS 29.122 [4].
3	URLLC	This feature indicates support of Ultra Reliable Low Latency Communication (URLLC) requirements (i.e. AF application relocation acknowledgement and UE address(es) preservation).
4	MacAddressRange	Indicates the support of a set of MAC addresses with a specific range in the traffic filter.
5	AF_latency	This feature indicates support for Edge relocation considering user plane latency.
6	EASDiscovery	This feature indicates the support of EAS (re)discovery.
7	EASIPreplacement	This feature indicates the support of provisioning of EAS IP replacement info.
8	ExposureToEAS	This feature indicates support for the indication provided by the AF of direct event notification of QoS monitoring events from the UPF to the Local NEF or the AF in 5GC.
9	SimultConnectivity	This feature indicates support of temporary simultaneous connectivity over source and target PSA at edge relocation.
10	ULBuffering	This feature indicates support for Uplink buffering indication for edge relocation.
11	EDGEAPP	This feature controls the support of EDGE applications related functionalities (e.g. support the provisioning of event reporting requirements).
Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".		
Description: A clear textual description of the feature.		

5.4.5 Error handling

5.4.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.4.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the TrafficInfluence API.

5.4.5.3 Application Errors

The application errors defined for TrafficInfluence API are listed in table 5.4.5.3-1.

Table 5.4.5.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

5.5 NiddConfigurationTrigger API

5.5.1 Resources

There is no resource defined for this API.

5.5.2 Notifications

5.5.2.1 Introduction

Upon receipt of a NIDD connection establishment request from the SMF and there is no NIDD configuration for the UE, the NEF may send an HTTP POST message in order to trigger the AF to start the NIDD configuration procedure as described in clause 5.6.3.2.3.4 of 3GPP TS 29.122 [4].

Table 5.5.2.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Event Notification	{notificationUri}	POST	Request for the NIDD Configuration Trigger

5.5.2.2 Event Notification

The Callback URI "{notificationUri}" shall be used with the callback URI variables defined in table 5.5.2.2-1.

Table 5.5.2.2-1: Callback URI variables

Name	Data type	Definition
notificationUri	Link	A URI indicating the notification destination where N33 notification requests shall be delivered to. This URI shall be preconfigured in the NEF.

5.5.2.3 Operation Definition

5.5.2.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.5.2.3.1-1 and the response data structures and response codes specified in table 5.5.2.3.1-2.

Table 5.5.2.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NiddConfigurationTrigger	M	1	The NIDD Configuration Trigger is provided by the NEF to the AF.

Table 5.5.2.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
NiddConfigurationTriggerReply	M	1	200 OK	The trigger is received successfully.
N/A			307 Temporary Redirect	Temporary redirection, during Configuration Trigger. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during Configuration Trigger. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.5.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

Table 5.5.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

5.5.2.3.2 Notification via Websocket

Not specified in the present specification.

5.5.3 Data Model

5.5.3.1 General

This clause specifies the application data model supported by the NiddConfigurationTrigger API.

5.5.3.2 Reused data types

The data types reused by the NiddConfigurationTrigger API from other specifications are listed in table 5.5.3.2-1.

Table 5.5.3.2-1: Re-used Data Types

Data type	Reference	Comments
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.5.4-1.

5.5.3.3 Structured data types

5.5.3.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.5.3.3.2 Type: NiddConfigurationTrigger

This type represents a NIDD configuration trigger which is sent from the NEF to the AF.

Table 5.5.3.3.2-1: Definition of type NiddConfigurationTrigger

Attribute name	Data type	P	Cardinality	Description	Applicability (NOTE)
aflid	string	M	1	Identifies the trigger receiving entity.	
neflid	string	M	1	Identifies the trigger sending entity.	
gpsi	Gpsi	M	1	Identifies a user.	
supFeat	SupportedFeatures	M	1	Indicates the list of Supported features used as described in clause 5.5.4.	
NOTE: Properties marked with a feature as defined in clause 5.5.4 are applicable as described in clause 5.2.7 of 3GPP TS 29.122 [4]. If no feature is indicated, the related property applies for all the features.					

5.5.3.3.3 Type: NiddConfigurationTriggerReply

This data type represents a reply to a NIDD configuration trigger and is sent from the AF to the NEF.

Table 5.5.3.3.3-1: Definition of type NiddConfigurationTriggerReply

Attribute name	Data type	P	Cardinality	Description	Applicability (NOTE)
supFeat	SupportedFeatures	M	1	Indicates the list of Supported features used as described in clause 5.5.4.	
NOTE: Properties marked with a feature as defined in clause 5.5.4 are applicable as described in clause 5.2.7 of 3GPP TS 29.122 [4]. If no feature is indicated, the related property applies for all the features.					

5.5.3.4 Simple data types and enumerations

5.5.3.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.5.3.4.2 Simple data types

The simple data types defined in table 5.5.3.4.2-1 shall be supported.

Table 5.5.3.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.5.4 Used Features

The table below defines the features applicable to the NiddConfigurationTrigger API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.5.4-1: Features used by NiddConfigurationTrigger API

Feature number	Feature Name	Description

5.5.5 Error handling

5.5.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.5.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the NiddConfigurationTrigger API.

5.5.5.3 Application Errors

The application errors defined for NiddConfigurationTrigger API are listed in table 5.5.5.3-1.

Table 5.5.5.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

5.6 AnalyticsExposure API

5.6.1 Resources

5.6.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-analyticsexposure/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-analyticsexposure" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.6.1.1-1 and the resources and HTTP methods used for the AnalyticsExposure API.

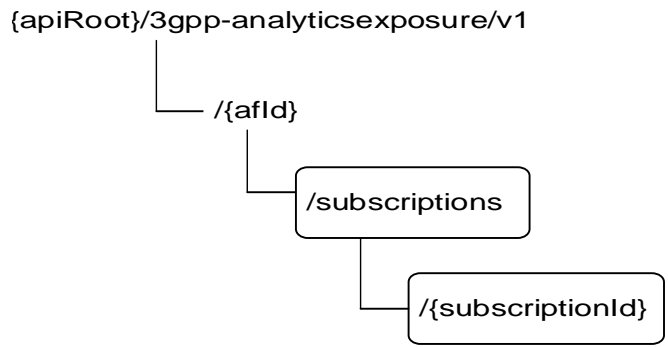


Figure 5.6.1.1-1: Resource URI structure of the AnalyticsExposure API

Table 5.6.1.1-1 provides an overview of the resources and HTTP methods applicable for the AnalyticsExposure API.

Table 5.6.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
Analytics Exposure Subscriptions	/{afld}/subscriptions	GET	Read all subscriptions for a given AF
		POST	Create a new subscription to analytics exposure
Individual Analytics Exposure Subscription	/{afld}/subscriptions /{subscriptionId}	GET	Read a subscription to analytics exposure
		PUT	Modify all of the properties of an existing subscription to analytics exposure
		DELETE	Delete a subscription to analytics exposure

5.6.1.2 Resource: Analytics Exposure Subscriptions

5.6.1.2.1 Introduction

This resource allows a AF to read all active analytics exposure subscriptions for the given AF, or allows a AF to create a new subscription to retrieve analytics information.

5.6.1.2.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-analyticsexposure/v1/{afld}/subscriptions**

This resource shall support the resource URI variables defined in table 5.6.1.2.2-1.

Table 5.6.1.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	string	Identifier of the AF.

5.6.1.2.3 Resource Methods

5.6.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.6.1.2.2.

5.6.1.2.3.2 GET

The GET method allows to read all active subscriptions for a given AF. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.6.1.2.3.2-1.

Table 5.6.1.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
supp-feat	SupportedFeatures	O	0..1	The features supported by the NF service consumer.

This method shall support the request data structures specified in table 5.6.1.2.3.2-2 and the response data structures and response codes specified in table 5.6.1.2.3.2-3.

Table 5.6.1.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.6.1.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(AnalyticsExposureSubsc)	M	0..N	200 OK	The subscription information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.6.1.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.6.1.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.6.1.2.3.3 POST

The POST method creates a new subscription resource to analytics exposure subscription for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.6.1.2.3.3-1 and the response data structures and response codes specified in table 5.6.1.2.3.3-2.

Table 5.6.1.2.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AnalyticsExposureSubsc	M	1	Parameters to request a subscription to retrieve analytics information with the NEF.

Table 5.6.1.2.3.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AnalyticsExposureSubsc	M	1	201 Created	The subscription was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
ProblemDetails	O	0..1	400 Bad Request	(NOTE 2)
ProblemDetails	O	0..1	500 Internal Server Error	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: Failure causes are described in clause 5.6.5.				

Table 5.6.1.2.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-analyticsexposure/v1/{afld}/subscriptions/{subscriptionId}

5.6.1.3 Resource: Individual Analytics Exposure Subscription

5.6.1.3.1 Introduction

This resource allows a AF to read/modify/cancel a subscription to retrieve analytics information with the NEF.

5.6.1.3.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-analyticsexposure/v1/{afld}/subscriptions/{subscriptionId}**

This resource shall support the resource URI variables defined in table 5.6.1.3.2-1.

Table 5.6.1.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	string	Identifier of the AF.
subscriptionId	string	Identifier of the subscription resource.

5.6.1.3.3 Resource Methods

5.6.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.6.1.3.2.

5.6.1.3.3.2 GET

The GET method allows to read the active subscription for a given AF and subscription Id. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.6.1.3.3.2-1.

Table 5.6.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
supp-feat	SupportedFeatures	O	0..1	The features supported by the NF service consumer.

This method shall support the request data structures specified in table 5.6.1.3.3.2-2 and the response data structures and response codes specified in table 5.6.1.3.3.2-3.

Table 5.6.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.6.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AnalyticsExposureSubsc	M	1	200 OK	The subscription information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.6.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.6.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.6.1.3.3.3 PUT

The PUT method modifies an existing subscription resource to update a subscription. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.6.1.3.3.3-1 and the response data structures and response codes specified in table 5.6.1.3.3.3-2.

Table 5.6.1.3.3.3-1: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
AnalyticsExposureSubsc	M	1	Modify an existing subscription to retrieve analytics information with the NEF.

Table 5.6.1.3.3.3-2: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AnalyticsExposureSubsc	M	1	200 OK	The subscription was updated successfully.
N/A			204 No Content	The subscription was updated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
ProblemDetails	O	0..1	400 Bad Request	(NOTE 2)
ProblemDetails	O	0..1	500 Internal Server Error	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: Failure causes are described in clause 5.6.5.				

Table 5.6.1.3.3.3-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.6.1.3.3.3-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.6.1.3.3.4 DELETE

The DELETE method deletes the analytics exposure subscription for a given AF. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.6.1.3.3.4-1.

Table 5.6.1.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.6.1.3.3.4-2 and the response data structures and response codes specified in table 5.6.1.3.3.4-3.

Table 5.6.1.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.6.1.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The subscription was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.6.1.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.6.1.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.6.1A Custom Operations without associated resources

5.6.1A.1 Overview

Custom operations used for this API are summarized in table 5.6.1A.1-1. "apiRoot" is set as described in clause 5.2.4 of 3GPP TS 29.122 [4].

Table 5.6.1A.1-1: Custom operations without associated resources

Operation name	Custom operation URI	Mapped HTTP method	Description
fetch	{apiRoot}/3gpp-analyticsexposure/v1/{afId}/fetch	POST	Request to fetch analytics information

5.6.1A.2 Operation: fetch

5.6.1A.2.1 Description

The custom operation allows a service consumer to fetch analytics information via the NEF.

5.6.1A.2.2 Operation Definition

This operation shall support the response data structures and response codes specified in tables 5.6.1A.2.2-1 and 5.6.1A.2.2-2.

Table 5.6.1A.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AnalyticsRequest	M	1	Parameters to request to fetch analytics information.

Table 5.6.1A.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AnalyticsData	M	1	200 OK	The requested analytics information was returned successfully.
n/a			204 No Content	If the request Analytics data does not exist, the NEF shall respond with "204 No Content".
N/A			307 Temporary Redirect	Temporary redirection, during analytics information retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during analytics information retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
ProblemDetails	O	0..1	400 Bad Request	(NOTE 2)
ProblemDetails	O	0..1	500 Internal Server Error	(NOTE 2)
ProblemDetailsAnalyticsInfoRequest	O	0..1	500 Internal Server Error	The request is rejected by the NEF and more details (not only the ProblemDetails) may be returned. (NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the POST method listed in Table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: Failure causes are described in clause 5.6.5.				

Table 5.6.1A.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.6.1A.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.6.2 Notifications

5.6.2.1 Introduction

Upon receipt of analytics information notification from the NWDAF indicating the subscribed analytics event is detected, the NEF shall send an HTTP POST message including the notified analytics event to the AF. The NEF and the AF shall support the notification mechanism as described in clause 5.2.5 of 3GPP TS 29.122 [4].

Table 5.6.2.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Event Notification	{notifUri}	POST	The analytics event notification is provided by the NEF to the AF.

5.6.2.2 Event Notification

The Callback URI "{**notifUri**}" shall be used with the callback URI variables defined in table 5.6.2.2-1.

Table 5.6.2.2-1: Callback URI variables

Name	Definition
notifUri	Callback reference provided by the AF during creation/modification of the subscription within the AnalyticsExposureSubsc data type as defined in Table 5.6.3.3.2-1.

5.6.2.3 Operation Definition

5.6.2.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.6.2.3.1-1 and the response data structures and response codes specified in table 5.6.2.3.1-2.

Table 5.6.2.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AnalyticsEventNotification	M	1	The analytics event notification is provided by the NEF to the AF.

Table 5.6.2.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The event notification is received successfully.
N/A			307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.6.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

Table 5.6.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

5.6.2.3.2 Notification via Websocket

If supported by both AF and NEF and successfully negotiated, the AnalyticsEventNotification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4 of 3GPP TS 29.122 [4].

5.6.3 Data Model

5.6.3.1 General

This clause specifies the application data model supported by the AnalyticsExposure API.

Table 5.6.3.1-1 specifies the data types defined for the AnalyticsExposure API.

Table 5.6.3.1-1: AnalyticsExposure API specific Data Types

Data type	Clause defined	Description	Applicability
AbnormalExposure	5.6.3.3.15	Represents a user's abnormal behavior information.	Abnormal_Behavior
AnalyticsData	5.6.3.3.14	Represents analytics data.	
AnalyticsEvent	5.6.3.4.3	Event that is subscribed.	
AnalyticsEventFilter	5.6.3.3.13	Represents analytics event filter information.	
AnalyticsEventFilterSubsc	5.6.3.3.6	Represents an analytics event filter.	
AnalyticsEventNotif	5.4.3.3.4	Represents an analytics event to be reported.	
AnalyticsEventNotification	5.6.3.3.3	Represents an analytics event(s) notification.	
AnalyticsEventSubsc	5.6.3.3.5	Represents a subscribed analytics event.	
AnalyticsExposureSubsc	5.6.3.3.2	Represents an analytics exposure subscription.	
AnalyticsFailureCode	5.6.3.4.4	Identifies the failure reason.	
AnalyticsFailureEventInfo	5.6.3.3.20	Represents an event for which the subscription request was not successful and including the associated failure reason.	
AnalyticsRequest	5.6.3.3.12	Represents the parameters to request to retrieve analytics information.	
CongestInfo	5.6.3.3.16	Represents a UE's user data congestion information.	Congestion
CongestionAnalytics	5.6.3.3.17	Represents data congestion analytics for transfer over the user plane, control plane or both.	
NetworkPerfExposure	5.6.3.3.19	Represents network performance information.	Network_Performance
QoSSustainabilityExposure	5.6.3.3.18	Represents a QoS sustainability information.	QoS_Sustainability
TargetUeId	5.6.3.3.7	Represents the target UE(s) information.	
UeLocationInfo	5.6.3.3.10	Represents a UE location information.	
UeMobilityExposure	5.6.3.3.9	Represents a UE mobility information.	Ue_Mobility

5.6.3.2 Reused data types

The data types reused by the AnalyticsExposure API from other specifications are listed in table 5.6.3.2-1.

Table 5.6.3.2-1: Re-used Data Types

Data type	Reference	Comments
AdditionalMeasurement	3GPP TS 29.520 [27]	
AddrFqdn	3GPP TS 29.517 [58]	
AnalyticsSubset	3GPP TS 29.520 [27]	Analytics Subset.
ReportingInformation	3GPP TS 29.523 [22]	Describes the analytics reporting requirement information.
BitRate	3GPP TS 29.571 [8]	
BwRequirement	3GPP TS 29.520 [27]	
CongestionType	3GPP TS 29.520 [27]	
DateTime	3GPP TS 29.122 [4]	
DispersionInfo	3GPP TS 29.520 [27]	Dispersion information.
DispersionRequirement	3GPP TS 29.520 [27]	Dispersion requirement.
Dnai	3GPP TS 29.571 [8]	Identifies a user plane access to one or more DN(s).
Dnn	3GPP TS 29.571 [8]	
DnPerfInfo	3GPP TS 29.520 [27]	DN Performance information.
DnPerformanceReq	3GPP TS 29.520 [27]	DN Performance requirement.
DurationSec	3GPP TS 29.122 [4]	Seconds of duration.
EventReportingRequirement	3GPP TS 29.520 [27]	
ExternalGroupId	3GPP TS 29.122 [4]	External Group Identifier for a user group.
ExceptionId	3GPP TS 29.520 [27]	
ExpectedAnalyticsType	3GPP TS 29.520 [27]	
ExpectedUeBehaviourData	3GPP TS 29.503 [17]	
Float	3GPP TS 29.571 [8]	
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
MatchingDirection	3GPP TS 29.520 [27]	Matching direction
NetworkPerfRequirement	3GPP TS 29.520 [27]	
NsIdInfo	3GPP TS 29.520 [27]	
NwdafFailureCode	3GPP TS 29.520 [27]	Identifies the analytics failure reason.
ProblemDetailsAnalyticsInfoRequest	3GPP TS 29.520 [27]	
QosRequirement	3GPP TS 29.520 [27]	
RatFreqInformation	3GPP TS 29.520 [27]	
RetainabilityThreshold	3GPP TS 29.520 [27]	
SamplingRatio	3GPP TS 29.571 [8]	Indicates Sampling Ratio.
ScheduledCommunicationTime	3GPP TS 29.122 [4]	
ServiceExperienceInfo	3GPP TS 29.520 [27]	
Snssai	3GPP TS 29.571 [8]	
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.6.4-1.
ThresholdLevel	3GPP TS 29.520 [27]	
TimeWindow	3GPP TS 29.122 [4]	
TopApplication	3GPP TS 29.520 [27]	Top application that contributes the most to the traffic.
UeCommunication	3GPP TS 29.520 [27]	
UInteger	3GPP TS 29.571 [8]	Unsigned integer.
Uri	3GPP TS 29.571 [8]	Identifies a referenced resource.
LocationArea5G	3GPP TS 29.122 [4]	

5.6.3.3 Structured data types

5.6.3.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.6.3.3.2 Type: AnalyticsExposureSubsc

This type represents an analytics exposure subscription. The same structure is used in the subscription request and subscription response.

Table 5.6.3.3.2-1: Definition of type AnalyticsExposureSubsc

Attribute name	Data type	P	Cardinality	Description	Applicability (NOTE 1)
analyEventsSubs	array(AnalyticsEventSubsc)	M	1..N	Subscribed analytics events.	
analyReplInfo	ReportingInformation	O	0..1	Reporting requirement information of the subscription. If omitted, the default values within the ReportingInformation data type apply. (NOTE 2)	
notifUri	Uri	M	1	Notification URI for analytics event reporting.	
notifId	string	M	1	Notification Correlation ID assigned by the NF service consumer.	
eventNotifis	array(AnalyticsEventNotif)	C	1..N	Represents the Events to be reported. Shall only be present if the immediate reporting indication in the "immRep" attribute within the "analyReplInfo" attribute sets to true during the event subscription, and the reports are available.	
failEventReports	array(AnalyticsFailureEventInfo)	O	1..N	Supplied by the NWDAF. When available, shall contain the event(s) for which the subscription is not successful, including the failure reason(s).	
suppFeat	SupportedFeatures	C	0..1	Indicates the list of Supported features used as described in clause 5.6.4. This attribute shall be provided in the POST request and in the response of successful resource creation, or in the HTTP GET response if the "supp-feat" attribute query parameter is included in the HTTP GET request.	
self	Link	C	0..1	Identifies the Individual Analytics Exposure Subscription resource. Shall be present in the HTTP GET response when reading all the subscriptions for an AF.	
requestTestNotification	boolean	O	0..1	Set to true by the AF to request the NEF to send a test notification as defined in clause 5.2.5.3 of 3GPP TS 29.122 [4]. Set to false or omitted otherwise.	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	O	0..1	Configuration parameters to set up notification delivery over Websocket protocol.	Notification_websocket
NOTE 1: Properties marked with a feature as defined in clause 5.6.4 are applicable as described in clause 5.2.7 of 3GPP TS 29.122 [4]. If no feature is indicated, the related property applies for all the features.					
NOTE 2: The attributes "partitionCriteria" and "notifFlag" of the data type ReportingInformation are applicable only if the "EneNA" feature is supported.					

5.6.3.3.3 Type: AnalyticsEventNotification

Table 5.6.3.3.3-1: Definition of type AnalyticsEventNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
notifId	string	M	1	Notification Correlation ID assigned by the NF service consumer.	
analyEventNotifs	array(AnalyticsEventNotif)	M	1..N	Represents the analytics events to be reported according to the subscription corresponding to the Notification Correlation ID.	

5.6.3.3.4 Type: AnalyticsEventNotif

Table 5.6.3.3.4-1: Definition of type AnalyticsEventNotif

Attribute name	Data type	P	Cardinality	Description	Applicability
analyEvent	AnalyticsEvent	M	1	Detected analytics event.	
expiry	DateTime	O	0..1	Defines the expiration time after which the analytics information will become invalid. (NOTE 2)	
timeStamp	DateTime	M	1	Time at which the event is observed.	
failNotifyCode	NwdafFailureCode	C	0..1	Identifies the failure reason for the event notification. It shall only be included if the event notification is failed or the analytics information is not ready. (NOTE 1)	EneNA
rvWaitTime	DurationSec	O	0..1	Indicates a recommended time interval (in seconds) which is used to determine the time when analytics information is needed in similar future event subscriptions. It may only be included if the "failNotifyCode" attribute sets to "UNSATISFIED_REQUESTED_ANALYTICS_TIME".	EneNA
ueMobilityInfos	array(UeMobilityExposure)	C	1..N	Contains the UE mobility information. Shall be present if the "analyEvent" attribute sets to "UE_MOBILITY".	Ue_Mobility
ueCommInfos	array(UeCommunication)	C	1..N	Contains the application communication information. Shall be present if the "analyEvent" attribute sets to "UE_COMM".	Ue_Communication
abnormallInfos	array(AbnormalExposure)	C	1..N	Contains the user's abnormal behavior information. Shall be present if the "analyEvent" attribute sets to "ABNORMAL_BEHAVIOR".	Abnormal_Behavior
congestInfos	array(CongestionInfo)	C	1..N	Contains the UE's user data congestion information. Shall be present if the "analyEvent" attribute sets to "CONGESTION".	Congestion
nwPerfInfos	array(NetworkPerformanceExposure)	C	1..N	Contains the network performance information. Shall be present if the "analyEvent" attribute is set to "NETWORK_PERFORMANCE".	Network_Performance
qosSustainInfos	array(QoS SustainabilityExposure)	C	1..N	Contains the QoS sustainability information. Shall be present if the "analyEvent" attribute is set to "QOS_SUSTAINABILITY".	QoS_Sustainability
disperInfos	array(DispersionInfo)	C	1..N	Contains the Dispersion information. Shall be present if the "analyEvent" attribute is set to "DISPERSION".	Dispersion
dnPerfInfos	array(DnPerfInfo)	C	1..N	Contains the DN performance information. Shall be present if the "analyEvent" attribute is set to "DN_PERFORMANCE".	DnPerformance

svcExps	array(ServiceExperienceInfo)	C	1..N	Contains the service experience information. Shall be present if the "analyEvent" attribute is set to "SERVICE_EXPERIENCE".	ServiceExperience
timeStampGen	DateTime	O	0..1	It defines the timestamp of analytics generation.	EneNA
start	DateTime	O	0..1	It defines the start time of which the analytics information will become valid. (NOTE 2)	EneNA
<p>NOTE 1: The values of "UNAVAILABLE_DATA" and "BOTH_STAT_PRED_NOT_ALLOWED" of the NwdafFailureCode data type are not applicable for the "failNotifyCode" attribute.</p> <p>NOTE 2: If the "start" attribute and the "expiry" attribute are both provided, the DateTime of the "expiry" attribute shall not be earlier than the DateTime of the "start" attribute.</p>					

5.6.3.3.5 Type: AnalyticsEventSubsc

Table 5.6.3.3.5-1: Definition of type AnalyticsEventSubsc

Attribute name	Data type	P	Cardinality	Description	Applicability
analyEvent	AnalyticsEvent	M	1	Requested analytics event.	
analyEventFilter	AnalyticsEventFilterSubsc	O	0..1	Represents analytics event filter.	(NOTE)
tgtUe	TargetUeId	O	0..1	Identifies target UE information	(NOTE)
NOTE: Applicability is further described in the corresponding data type.					

5.6.3.3.6 Type: AnalyticsEventFilterSubsc

Table 5.6.3.3.6-1: Definition of type AnalyticsEventFilterSubsc

Attribute name	Data type	P	Cardinality	Description	Applicability
locArea	LocationArea5G	O	0..1	Identification of network area to which the subscription applies. (NOTE 1) (NOTE 7)	Abnormal_Behavior Congestion Ue_Communication Ue_Mobility QoS_Sustainability Network_Performance Dispersion DnPerformance ServiceExperience
dnn	Dnn	O	0..1	Identifies the DNN. (NOTE 7)	Ue_Communication Abnormal_Behavior ServiceExperience DnPerformance
dnais	array(Dnai)	O	1..N	Identification(s) of user plane access to DN(s) which the subscription applies.	DnPerformance ServiceExperience
applds	array(ApplicationId)	O	1..N	Each element identifies an application. (NOTE 7)	Abnormal_Behavior Ue_Communication Dispersion DnPerformance ServiceExperience
excepRequs	array(Exception)	O	1..N	Represents a list of Exception Ids with associated thresholds. (NOTE 2, NOTE 3)	Abnormal_Behavior
exptAnaType	ExpectedAnalyticsType	O	0..1	Represents expected UE analytics type. (NOTE 3)	Abnormal_Behavior
exptUeBehav	ExpectedUeBehaviourData	O	0..1	Represents expected UE behaviour.	Abnormal_Behavior
matchingDir	MatchingDirection	O	0..1	A matching direction may be provided alongside a threshold. If omitted, the default value is CROSSED.	QoS_Sustainability Congestion, Network_Performance
reptThlds	array(ThresholdLevel)	O	1..N	Represents the levels to be reached in order to be notified by the NEF. (NOTE 4)	Congestion
nwPerfReqs	array(NetworkPerformanceRequirement)	C	1..N	Represents the network performance requirements. This attribute shall be included when eventId is "NETWORK_PERFORMANCE".	Network_Performance
snsai	Snsai	O	0..1	Identifies the network slice information. (NOTE 7)	Ue_Communication QoS_Sustainability Abnormal_Behavior Congestion Dispersion ServiceExperience DnPerformance
nsildInfos	array(NsildInfo)	O	1..N	Each element identifies the S-NSSAI and the optionally associated network slice instance(s). May be included when subscribed event is "SERVICE_EXPERIENCE" or "DN_PERFORMANCE".	ServiceExperience DnPerformance
qosReq	QosRequirement	C	0..1	Represents the QoS requirements. This attribute shall be included when eventId is "QOS_SUSTAINABILITY".	QoS_Sustainability
qosFlowRetThds	array(RetainabilityThreshold)	C	1..N	Represents the QoS flow retainability thresholds, Shall be supplied for the 5QI of GBR resource type. (NOTE 5)	QoS_Sustainability

ranUeThrouThds	array(BitRate)	C	1..N	Represents the RAN UE throughput thresholds. Shall be supplied for the 5QI of non-GBR resource type. (NOTE 5)	QoS_Sustainability
disperReqs	array(Dispersion Requirement)	O	1..N	Represents the dispersion analytics requirements.	Dispersion
dnPerfReqs	array(DnPerformanceReq)	O	1..N	Represents the DN performance analytics requirements.	DnPerformance
bwRequs	array(BwRequirement)	O	1..N	Represents the bandwidth requirement for each application.	ServiceExperience
ratFreqs	array(RatFreqInformation)	O	1..N	Identification(s) of the RAT type and/or frequencies of UE's serving cell(s) which the subscription applies. (NOTE 8)	ServiceExperience
appServerAddrs	array(AddrFqdn)	C	1..N	Each of the element represents the Application Server Instance (IP address/FQDN of the Application Server) (NOTE 9)	ServiceExperience DnPerformance
listOfAnaSubsets	array(AnalyticsSubset)	O	1..N	The list of analytics subsets can be used to indicate the content of the analytics.	EneNA
extraReportReq	EventReportingRequirement	O	0..1	The extra event reporting requirement information. (NOTE 6)	
maxNumOfTopAppUl	UInteger	O	0..1	Indicates the requested maximum number of top applications that contribute the most to the traffic in Uplink direction. Minimum = 1. May be included when one of the element in the "listOfAnaSubsets" attribute is set to LIST_OF_TOP_APP_UL.	CongestionExt
maxNumOfTopAppDl	UInteger	O	0..1	Indicates the requested maximum number of top applications that contribute the most to the traffic in Downlink direction. Minimum = 1. May be included when one of the element in the "listOfAnaSubsets" attribute is set to LIST_OF_TOP_APP_DL.	CongestionExt
visitedLocAreas	array(LocationArea5G)	O	1..N	Identifications of network areas which the UEs had previously been in at least one of the Visited Area(s) of Interest. (NOTE 10)	Ue_Mobility

NOTE 1: The NetworkAreaInfo within the "locArea" attribute is not applicable for the untrusted AF. For "NETWORK_PERFORMANCE" or "CONGESTION" event, the "locArea" attribute shall be provided if the event applied for all UEs (i.e. "anyUeInd" attribute set to true within the TargetUeId data). For "QOS_SUSTAINABILITY" event, the "locArea" attribute shall be provided.

NOTE 2: Only "exceptId" and "exceptLevel" within the Exception data type apply to the "exceptRequs" attribute.

NOTE 3: Either "exceptRequs" or "exptAnaType" shall be provided if the subscribed event is "ABNORMAL_BEHAVIOR".

NOTE 4: If the subscribed event is "CONGESTION" or "DN_PERFORMANCE", this attribute shall be provided if "notifMethod" within "analyReplInfo" sets to "ON_EVENT_DETECTION" or omitted.

NOTE 5: For "QOS_SUSTAINABILITY", this property shall be provided if the "notifMethod" in "analyReplInfo" is set to "ON_EVENT_DETECTION" or omitted.

NOTE 6: The "sampRatio" attribute and "histAnaTimePeriod" attribute within EventReportingRequirement data type is not applicable for the present API. The attributes "accPerSubset", "offsetPeriod", and "timeAnaNeeded" within the EventReportingRequirement data type are applicable only if the "EneNA" feature is supported.

NOTE 7: For "ABNORMAL_BEHAVIOR" event with "anyUeInd" attribute in "tgtUe" attribute sets to true,

- at least one of the "locArea" and the "snssai" attribute should be included, if the expected analytics type via the "exptAnaType" attribute or the list of Exception Ids via the "exceptRequs" attribute is mobility related;
- at least one of the "locArea", "appls", "dnn" and "snssai" attribute should be included, if the expected analytics type via the "exptAnaType" attribute or the list of Exception Ids via the "exceptRequs" attribute is communication related;
- the expected analytics type via the "exptAnaType" attribute or the list of Exception Ids via "exceptRequs" attribute shall not be requested for both mobility and communication related analytics at the same time.

NOTE 8: If both the "allFreq" attribute and the "allRat" attribute within the "ratFreqs" attribute are present, then the cardinality shall be 1 as the "all" indication for all the RAT type and Frequency value the NWDAF has received for the application.

NOTE 9: This parameter shall be provided when a consumer requires analytics for an edge application over a UP path.

NOTE 10: The NetworkAreaInfo within the "visitedLocAreas" attribute is not applicable for the untrusted AF. If this attribute is provided, the analytics target period shall be a past time period (i.e. only statistics is supported).

5.6.3.3.7 Type TargetUeId

Table 5.6.3.3.7-1: Definition of type TargetUeId

Attribute name	Data type	P	Cardinality	Description	Applicability
anyUeInd	boolean	O	0..1	Identifies whether the AF request applies to any UE. This attribute shall set to "true" if applicable for any UE, otherwise, set to "false".	Abnormal_Behavior Congestion Network_Performance QoS_Sustainability Dispersion DnPerformance ServiceExperience
gpsi	Gpsi	O	0..1	Identifies a GPSI for an UE.	Abnormal_Behavior Congestion Ue_Mobility Ue_Communication Network_Performance Dispersion DnPerformance ServiceExperience
exterGroupId	ExternalGroupId	O	0..1	Represents an external group identifier and identifies a group of UEs.	Abnormal_Behavior Ue_Mobility Ue_Communication Network_Performance Dispersion DnPerformance ServiceExperience
NOTE: For an applicable feature, only one attribute identifying the target UE shall be provided.					

5.6.3.3.8 Void

5.6.3.3.9 Type UeMobilityExposure

Table 5.6.3.3.9-1: Definition of type UeMobilityExposure

Attribute name	Data type	P	Cardinality	Description	Applicability
ts	DateTime	O	0..1	This attribute identifies the timestamp when the UE arrives the location. (NOTE 1)	
recurringTime	ScheduledCommunicationTime	O	0..1	Identifies time of the day and day of the week which are valid within the observation period when the UE moves. (NOTE 1, NOTE 2)	
duration	DurationSec	M	1	This attribute identifies the time duration the UE stays in the location. If the analytics result applies for a group of UEs, it indicates the average duration for the group of UEs.	
durationVariance	Float	C	0..1	This attribute indicates the variance of the analysed durations for the group of UEs. It shall be provided if the analytics result applies for a group of UEs.	
locInfo	array(UeLocationInfo)	M	1..N	This attribute includes a list of UE location information during the time duration.	
NOTE 1: Either ts or recurringTime shall be provided.					
NOTE 2: If this attribute is present, it indicates the UE movement is periodic. This attribute is suitable to be present for a recurring mobility in a long observation time.					

5.6.3.3.10 Type UeLocationInfo

Table 5.6.3.3.10-1: Definition of type UeLocationInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
loc	LocationArea5G	M	1	This attribute contains the detailed location.	
ratio	SamplingRatio	C	0..1	This attribute contains the percentage of UEs in the group. Shall be present if the analytics result applies for a group of UEs.	
confidence	UInteger	C	0..1	Indicates the confidence of the prediction. (NOTE) Shall be present if the analytics result is a prediction. Minimum = 0. Maximum = 100.	
NOTE: If the requested period identified by the "startTs" and "endTs" attributes in the "EventReportingRequirement" type is a future time period, which means the analytics result is a prediction. If no sufficient data is collected to provide the confidence of the prediction before the time deadline, a zero confidence shall be returned.					

5.6.3.3.11 Void

5.6.3.3.12 Type: AnalyticsRequest

Table 5.6.3.3.12-1: Definition of type AnalyticsRequest

Attribute name	Data type	P	Cardinality	Description	Applicability
analyEvent	AnalyticsEvent	M	1	Identifies the analytics type.	
analyEventFilter	AnalyticsEventFilter	C	0..1	Shall be included to identify the analytics when filter information is needed for the related event.	
analyRep	EventReportingRequirement	O	0..1	Identifies the analytics reporting requirement information. (NOTE)	
tgtUe	TargetUeId	O	0..1	Identifies the target UE information.	
suppFeat	SupportedFeatures	M	1	Represents the features supported by the NF service consumer.	
NOTE: The attributes "accPerSubset", "offsetPeriod", and "timeAnaNeeded" within the EventReportingRequirement data type are applicable only if the "EneNA" feature is supported.					

5.6.3.3.13 Type AnalyticsEventFilter

Table 5.6.3.3.13-1: Definition of type AnalyticsEventFilter

Attribute name	Data type	P	Cardinality	Description	Applicability
locArea	LocationArea5G	C	0..1	This IE represents the network area where the NF service consumer wants to know the analytics result. (NOTE 2, NOTE 3)	Ue_Mobility Ue_Communication Network_Performance QoS_Sustainability Abnormal_Behavior Congestion Dispersion DnPerformance ServiceExperience
dnn	Dnn	O	0..1	Identifies the DNN. (NOTE 3)	Ue_Communication Abnormal_Behavior DnPerformance ServiceExperience
dnais	array(Dnai)	O	1..N	Identification(s) of user plane access to DN(s) which the subscription applies.	DnPerformance ServiceExperience
nwPerfTypes	array(NetworkPerfType)	C	1..N	Represents the network performance requirements. This attribute shall be included when eventId is "NETWORK_PERFORMANCE".	Network_Performance
applds	array(ApplicationId)	O	1..N	Each element identifies an application. The absence of applds means all applications. (NOTE 3)	Ue_Communication Abnormal_Behavior DnPerformance ServiceExperience Dispersion
exceptds	array(ExceptionId)	O	1..N	Represents a list of Exception Ids. (NOTE 1)	Abnormal_Behavior
exptAnaType	ExpectedAnalyticsType	O	0..1	Represents expected UE analytics type. (NOTE 1)	Abnormal_Behavior
exptUeBehav	ExpectedUeBehaviourData	O	0..1	Represents expected UE behaviour.	Abnormal_Behavior
snssai	Snssai	O	0..1	Identifies the network slice information. (NOTE 3)	Ue_Communication QoS_Sustainability Abnormal_Behavior Congestion Dispersion DnPerformance ServiceExperience
nsildInfos	array(NsildInfo)	O	1..N	Each element identifies the S-NSSAI and the optionally associated network slice instance(s). May be included when subscribed event is "SERVICE_EXPERIENCE" or "DN_PERFORMANCE".	ServiceExperience DnPerformance
qosReq	QosRequirement	C	0..1	Represents the QoS requirements. This attribute shall be included when analyEvent is "QOS_SUSTAINABILITY".	QoS_Sustainability
listOfAnaSubsets	array(AnalyticsSubset)	O	1..N	The list of analytics subsets can be used to indicate the content of the analytics.	EneNA
dnPerfReqs	array(DnPerformanceReq)	O	1..N	Represents the DN performance analytics requirements.	DnPerformance
bwReqs	array(BwRequirement)	O	1..N	Represents the media/application bandwidth requirement for each application. It may only be present if "applds" attribute is provided.	ServiceExperience

ratFreqs	array(RatFreqInformation)	O	1..N	Identification(s) of the RAT type and/or frequencies of UE's serving cell(s) which the subscription applies. (NOTE 4)	ServiceExperience
appServerAdrs	array(AddrFqdn)	C	1..N	Each of the element represents the Application Server Instance (IP address/FQDN of the Application Server). (NOTE 5)	ServiceExperience DnPerformance
disperReqs	array(DispersionRequirement)	O	1..N	Represents the requirements of dispersion analytics.	Dispersion
maxNumOfTopAppUI	UInteger	O	0..1	Indicates the requested maximum number of top applications that contribute the most to the traffic in Uplink direction. Minimum = 1. May be included when one of the elements in the "listOfAnaSubsets" attribute is set to LIST_OF_TOP_APP_UL.	CongestionExt
maxNumOfTopAppDL	UInteger	O	0..1	Indicates the requested maximum number of top applications that contribute the most to the traffic in Downlink direction. Minimum = 1. May be included when one of the elements in the "listOfAnaSubsets" attribute is set to LIST_OF_TOP_APP_DL.	CongestionExt
visitedLocAreas	array(LocationArea5G)	O	1..N	Identifications of network areas which the UEs had previously been in at least one of the Visited Area(s) of Interest. (NOTE 6)	Ue_Mobility
<p>NOTE 1: Either "exceptIds" or "exptAnaType" shall be provided if the subscribed event is "ABNORMAL_BEHAVIOR".</p> <p>NOTE 2: The NetworkAreaInfo within the "locArea" attribute is not applicable for the untrusted AF. For "NETWORK_PERFORMANCE" or "CONGESTION" event, the "locArea" attribute shall be provided if the event applied for all UEs (i.e. "anyUeInd" attribute set to true within the TargetUeId data). For "QOS_SUSTAINABILITY" event, this attribute shall be provided.</p> <p>NOTE 3: For "ABNORMAL_BEHAVIOR" event with "anyUeInd" attribute in "tgtUe" attribute sets to true,</p> <ul style="list-style-type: none"> - at least one of the "locArea" and the "snssai" attribute should be included, if the expected analytics type via the "exptAnaType" attribute or the list of Exception Ids via the "exceptIds" attribute is mobility related; - at least one of the "locArea", "appls", "dnn" and "snssai" attribute should be included, if the expected analytics type via the "exptAnaType" attribute or the list of Exception Ids via the "exceptIds" attribute is communication related; - the expected analytics type via the "exptAnaType" attribute or the list of Exception Ids via "exceptIds" attribute shall not be requested for both mobility and communication related analytics at the same time. <p>NOTE 4: If both the "allFreq" attribute and the "allRat" attribute within the "ratFreqs" attribute are present, then the cardinality shall be 1 as the "all" indication for all the RAT type and Frequency value the NWDAF has received for the application.</p> <p>NOTE 5: This parameter shall be provided when a consumer requires analytics for an edge application over a UP path.</p> <p>NOTE 6: The NetworkAreaInfo within the "visitedLocAreas" attribute is not applicable for the untrusted AF. If this attribute is provided, the analytics target period shall be a past time period (i.e. only statistics is supported).</p>					

5.6.3.3.14 Type AnalyticsData

Table 5.6.3.3.14-1: Definition of type AnalyticsData

Attribute name	Data type	P	Cardinality	Description	Applicability
start	DateTime	O	0..1	It defines the start time of which the analytics information will become valid. (NOTE 1)	EneNA
expiry	DateTime	O	0..1	Defines the expiration time after which the analytics information will become invalid. (NOTE 1)	
timeStampGen	DateTime	O	0..1	It defines the timestamp of analytics generation.	EneNA
ueMobilityInfos	array(UeMobilityExposure)	C	1..N	Contains the UE mobility information. Shall be present if the "analyEvent" attribute sets to "UE_MOBILITY"	Ue_Mobility
ueCommInfos	array(UeCommunication)	C	1..N	Contains the application communication information. Shall be present if the "analyEvent" attribute sets to "UE_COMM"	Ue_Communication
nwPerfInfos	array(NetworkPerfExposure)	C	1..N	Contains the network performance information. Shall be present if the "analyEvent" attribute is set to "NETWORK_PERFORMANCE".	Network_Performance
abnormallInfos	array(AbnormalExposure)	C	1..N	Contains the user's abnormal behavior information. Shall be present if the "analyEvent" attribute sets to "ABNORMAL_BEHAVIOR".	Abnormal_Behavior
congestInfos	array(CongestInfo)	C	1..N	Contains the UE's user data congestion information. Shall be present if the "analyEvent" attribute sets to "CONGESTION".	Congestion
qosSustainInfos	array(QosSustainabilityExposure)	C	1..N	Contains the QoS sustainability information. Shall be present if the "analyEvent" attribute is set to "QOS_SUSTAINABILITY". (NOTE 2)	QoS_Sustainability
disperInfos	array(DispersionInfo)	C	1..N	Contains the Dispersion information. Shall be present if the "analyEvent" attribute is set to "DISPERSION".	Dispersion
dnPerfInfos	array(DnPerfInfo)	C	1..N	Contains the DN performance information. Shall be present if the "analyEvent" attribute is set to "DN_PERFORMANCE".	DnPerformance
svcExps	array(ServiceExperienceInfo)	C	1..N	Contains the service experience information. Shall be present if the "analyEvent" attribute is set to "SERVICE_EXPERIENCE".	ServiceExperience
suppFeat	SupportedFeatures	M	1	Represents the features supported by both the AF and the NEF.	
NOTE 1: If the "start" attribute and the "expiry" attribute are both provided, the DateTime of the "expiry" attribute shall not be earlier than the DateTime of the "start" attribute.					
NOTE 2: The "qosFlowRetThd" and "ranUeThrouThd" attributes in QosSustainabilityExposure data type are not applicable.					

5.6.3.3.15 Type AbnormalExposure

Table 5.6.3.3.15-1: Definition of type AbnormalExposure

Attribute name	Data type	P	Cardinality	Description	Applicability
gpsis	array(Gpsi)	C	1..N	Each element identifies a UE which is affected with the Exception. Shall be present if the subscription request applies to more than one UE.	
excep	Exception	M	1	Contains the exception information.	
appld	ApplicationId	O	0..1	Identifies an application. May only be present if the "applds" attribute was provided within AnalyticsEventFilter during the subscription for event notification procedure.	
dnn	Dnn	O	0..1	Identifies DNN, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only.	Abnormal_Behavior_Ext
snssai	Snssai	O	0..1	Identifies the network slice information.	Abnormal_Behavior_Ext
ratio	SamplingRatio	C	0..1	This attribute contains the percentage of UEs with same analytics result in the group or among all UEs. Shall be present if the analytics result applies for a group of UEs or any UE.	
confidence	UInteger	C	0..1	Indicates the confidence of the prediction. (NOTE) Shall be present if the analytics result is a prediction. Minimum = 0. Maximum = 100.	
addtMeasInfo	AdditionalMeasurement	O	0..1	Additional measurement.	
NOTE: If the requested period identified by the "startTs" and "endTs" attributes in the "EventReportingRequirement" type is a future time period, which means the analytics result is a prediction. If no sufficient data is collected to provide the confidence of the prediction before the time deadline, a zero confidence shall be returned.					

5.6.3.3.16 Type CongestInfo

Table 5.6.3.3.16-1: Definition of type CongestInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
locArea	LocationArea5G	M	1	Network area of interest. (NOTE)	
cngAnas	array(CongestionAnalytics)	M	1..N	Represents data congestion analytics for transfer over the user plane, control plane or both planes.	
NOTE: The NetworkAreaInfo data within the LocationArea5G data is not applicable.					

5.6.3.3.17 Type CongestionAnalytics

Table 5.6.3.3.17-1: Definition of type CongestionAnalytics

Attribute name	Data type	P	Cardinality	Description	Applicability
cngType	CongestionType	M	1	Represents congestion type.	
tmWdw	TimeWindow	M	1	Represents a start time and a stop time observed for the congestion information.	
nsi	ThresholdLevel	M	1	Represents network congestion level.	
confidence	UInteger	C	0..1	Indicates the confidence of the prediction. (NOTE) Shall be present if the analytics result is a prediction. Minimum = 0. Maximum = 100.	
topAppListUl	array(TopApplication)	C	1..N	List of top applications in Uplink. Shall be present if one of the element in the "listOfAnaSubsets" attribute was set to LIST_OF_TOP_APP_UL.	CongestionExt
topAppListDl	array(TopApplication)	C	1..N	List of top applications in Downlink. Shall be present if one of the element in the "listOfAnaSubsets" attribute was set to LIST_OF_TOP_APP_DL.	CongestionExt
NOTE:	If the requested period identified by the "startTs" and "endTs" attributes in the "EventReportingRequirement" type is a future time period, which means the analytics result is a prediction. If no sufficient data is collected to provide the confidence of the prediction before the time deadline, a zero confidence shall be returned.				

5.6.3.3.18 Type QoSustainabilityExposure

Table 5.6.3.3.18-1: Definition of type QoSustainabilityExposure

Attribute name	Data type	P	Cardinality	Description	Applicability
locArea	LocationArea5G	M	1	Identification(s) of applicable location areas where the analytics result applies. (NOTE 3)	
startTs	DateTime	M	1	Represents the start time of the applicable observing period.	
endTs	DateTime	M	1	Represents the end time of the applicable observing period.	
qosFlowRetThd	RetainabilityThreshold	O	0..1	The reporting QoS Flow Retainability Threshold that are met or crossed for 5QI of GBR resource type. (NOTE 1)	
ranUeThrouThd	BitRate	O	0..1	The reporting RAN UE Throughput Threshold that are met or crossed for 5QI of non-GBR resource type. (NOTE 1)	
snssai	Snssai	O	0..1	Identifies the network slice information.	QoS_Sustainability_Ext
confidence	UInteger	C	0..1	Indicates the confidence of the prediction. (NOTE 2) Shall be present if the analytics result is a prediction. Minimum = 0. Maximum = 100.	
NOTE 1:	Either qosFlowRetThd or ranUeThrouThd shall be provided.				
NOTE 2:	If the requested period identified by the "startTs" and "endTs" attributes in the "EventReportingRequirement" type is a future time period, which means the analytics result is a prediction. If no sufficient data is collected to provide the confidence of the prediction before the time deadline, a zero confidence shall be returned.				
NOTE 3:	The NetworkAreaInfo data within the LocationArea5G data is not applicable.				

5.6.3.3.19 Type NetworkPerfExposure

Table 5.6.3.3.19-1: Definition of type NetworkPerfExposure

Attribute name	Data type	P	Cardinality	Description	Applicability
locArea	LocationArea5G	M	1	Identification of network area to which the subscription applies. (NOTE 3)	
nwPerfType	NetworkPerfType	M	1	The type of the network performance	
relativeRatio	SamplingRatio	O	0..1	The reported relative ratio expressed in percentage. (NOTE 1)	
absoluteNum	UInteger	O	0..1	The reported absolute number (NOTE 1)	
confidence	UInteger	C	0..1	Indicates the confidence of the prediction. (NOTE 2) Shall be present if the analytics result is a prediction. Minimum = 0. Maximum = 100.	
NOTE 1: Either relativeRatio or absoluteNum shall be provided.					
NOTE 2: If the requested period identified by the "startTs" and "endTs" attributes in the "EventReportingRequirement" type is a future time period, which means the analytics result is a prediction. If no sufficient data is collected to provide the confidence of the prediction before the time deadline, a zero confidence shall be returned.					
NOTE 3: The NetworkAreaInfo data within the LocationArea5G data is not applicable.					

5.6.3.3.20 Type AnalyticsFailureEventInfo

Table 5.6.3.3.20-1: Definition of type AnalyticsFailureEventInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
event	AnalyticsEvent	M	1	Event that is subscribed.	
failureCode	AnalyticsFailureCode	M	1	Identifies the failure reason	

5.6.3.4 Simple data types and enumerations

5.6.3.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.6.3.4.2 Simple data types

The simple data types defined in table 5.6.3.4.2-1 shall be supported.

Table 5.6.3.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.6.3.4.3 Enumeration: AnalyticsEvent

The enumeration represents the type of analytics events of which the AF requests to be notified. It shall comply with the provisions defined in table 5.6.3.4.3-1.

Table 5.6.3.4.3-1: Enumeration AnalyticsEvent

Enumeration value	Description	Applicability
UE_MOBILITY	The AF requests to be notified about analytics information of UE mobility.	Ue_Mobility
UE_COMM	The AF requests to be notified about analytics information of UE communication.	Ue_Communication
ABNORMAL_BEHAVIOR	The AF requests to be notified about analytics information of UE's abnormal behavior.	Abnormal_Behavior
CONGESTION	The AF requests to be notified about analytics information of user data congestion information.	Congestion
NETWORK_PERFORMANCE	The AF requests to be notified about analytics information of network performance information.	Network_Performance
QOS_SUSTAINABILITY	The AF requests to be notified about analytics information of QoS sustainability.	QoS_Sustainability
DISPERSION	The AF requests to be notified about analytics information of Dispersion information.	Dispersion
DN_PERFORMANCE	The AF requests to be notified about analytics information of DN performance information.	DnPerformance
SERVICE_EXPERIENCE	The AF requests to be notified about analytics information of service experience.	ServiceExperience

5.6.3.4.4 Enumeration: AnalyticsFailureCode

Table 5.6.3.4.4-1: Enumeration AnalyticsFailureCode

Enumeration value	Description	Applicability
BOTH_STAT_PRED_NOT_ALLOWED	The event is rejected since the start time is in the past and the end time is in the future, which means the NF service consumer requested both statistics and prediction for the analytics.	
UNAVAILABLE_DATA	The event is rejected since necessary data to perform the service is unavailable.	
UNSATISFIED_REQUESTED_ANALYTICS_TIME	Indicates that the requested event is rejected since the analytics information is not ready when the time indicated by the "timeAnaNeeded" attribute (as provided during the creation or modification of subscription) is reached.	EneNA
OTHER	The event is rejected due to other reasons.	

5.6.4 Used Features

The table below defines the features applicable to the AnalyticsExposure API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.6.4-1: Features used by AnalyticsExposure API

Feature number	Feature Name	Description
1	Ue_Mobility	This feature indicates support for the analytics event related to UE mobility.
2	Ue_Communication	This feature indicates support for the analytics event related to UE communication information.
3	Abnormal_Behavior	This feature indicates support for the analytics event related to UE's abnormal behaviour.
4	Congestion	This feature indicates support for the analytics event related to UE's user data congestion information.
5	Network_Performance	This feature indicates support for the analytics event related to network performance.
6	QoS_Sustainability	This feature indicates support for the analytics event related to QoS sustainability.
7	Notification_websocket	The delivery of notifications over Websocket is supported as described in 3GPP TS 29.122 [4]. This feature requires that the Notification_test_event feature is also supported.
8	Notification_test_event	The testing of notification connection is supported as described in 3GPP TS 29.122 [4].
9	Dispersion	This feature indicates support for the analytics event related to Dispersion analytics.
10	EneNA	This feature indicates support for the enhancements of network data analytics requirements.
11	DnPerformance	This feature indicates the support of the analytics event related to DN performance.
12	ServiceExperience	This feature indicates support for the event related to service experience.
13	CongestionExt	This feature indicates support for the extensions to the event related to user data congestion, including support of GPSI and/or list of Top applications. Supporting this feature also requires the support of feature Congestion.
14	Abnormal_Behavior_Ext	This feature indicates support for the extensions to the event related to abnormal behavior, including support of exposing DNN and S-NSSAI information. Supporting this feature also requires the support of feature Abnormal_Behavior.
15	QoS_Sustainability_Ext	This feature indicates support for the extensions to the event related to QoS sustainability, including support of exposing S-NSSAI information. Supporting this feature also requires the support of feature QoS_Sustainability.

5.6.5 Error handling

5.6.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.6.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the AnalyticsExposure API.

5.6.5.3 Application Errors

The application errors defined for the AnalyticsExposure API are listed in table 5.6.5.3-1.

Table 5.6.5.3-1: Application errors

Application Error	HTTP status code	Description
BOTH_STAT_PRED_NOT_ALLOWED	400 Bad Request	For the requested observation period, the start time is in the past and the end time is in the future, which means the AF requested both statistics and prediction for the analytics.
UNAVAILABLE_DATA	500 Internal Server Error	Indicates the requested statistics in the past is rejected since necessary data to perform the service is unavailable.
UNSATISFIED_REQUESTED_ANALYTICS_TIME	500 Internal Server Error	Indicates that the requested event is rejected since the analytics information is not ready when the time indicated by the "timeAnaNeeded" attribute (as provided during the request) is reached.

5.7 5GLANParameterProvision API

5.7.1 Resources

5.7.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-5glan-pp/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-5glan-pp" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.7.1.1-1 and the resources and HTTP methods used for the 5GLANParameterProvision API.

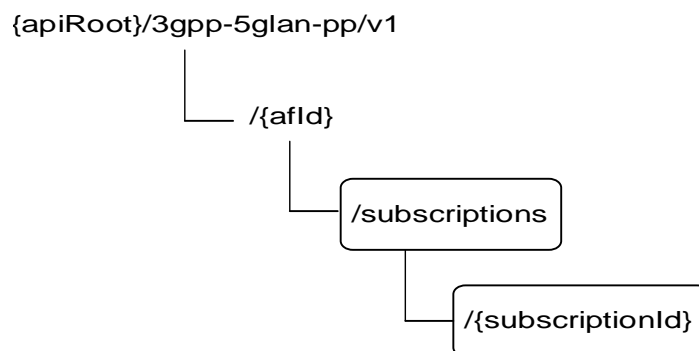


Figure 5.7.1.1-1: Resource URI structure of the 5GLANParameterProvision API

Table 5.7.1.1-1 provides an overview of the resources and HTTP methods applicable for the 5GLANParameterProvision API.

Table 5.7.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
5GLAN Parameters Provision Subscriptions	/{afld}/subscriptions	GET	Read all subscriptions for a given AF
		POST	Create a new subscription to provision parameters
Individual 5GLAN Parameters Provision Subscription	/{afld}/subscriptions/{subscriptionId}	GET	Read an existing subscription identified by {subscriptionId}
		PUT	Modify all of the properties of an existing subscription identified by {subscriptionId}
		PATCH	Modify some properties of an existing subscription identified by {subscriptionId}
		DELETE	Delete a subscription identified by {subscriptionId}

5.7.1.2 Resource: 5GLAN Parameters Provision Subscriptions

5.7.1.2.1 Introduction

This resource allows a AF to read all active 5GLAN parameters provision subscriptions for the given AF, or create a new individual 5GLAN parameters provision subscription to provision parameters to the NEF.

5.7.1.2.2 Resource Definition

Resource URI: {apiRoot}/3gpp-5gla-pp/v1/{afld}/subscriptions

This resource shall support the resource URI variables defined in table 5.7.1.2.2-1.

Table 5.7.1.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	string	Identifier of the AF.

5.7.1.2.3 Resource Methods

5.7.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.7.1.2.2.

5.7.1.2.3.2 GET

The GET method allows to read all active subscriptions for a given AF. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.7.1.2.3.2-1.

Table 5.7.1.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.7.1.2.3.2-2 and the response data structures and response codes specified in table 5.7.1.2.3.2-3.

Table 5.7.1.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.7.1.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(5GLanParametersProvision)	M	0..N	200 OK	All the subscription information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.7.1.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.7.1.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.7.1.2.3.3 POST

The POST method creates a new resource to individual 5GLAN parameters provision subscription for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.7.1.2.3.3-1 and the response data structures and response codes specified in table 5.7.1.2.3.3-2.

Table 5.7.1.2.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
5GLanParametersProvision	M	1	Parameters to create a subscription to provision parameters.

Table 5.7.1.2.3.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
5GLanParametersProvision	M	1	201 Created	The subscription was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.7.1.2.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-5glan-pp/v1/{afld}/subscriptions/{subscriptionId}

5.7.1.3 Resource: Individual 5GLAN Parameters Provision Subscription

5.7.1.3.1 Introduction

This resource allows a AF to read, update or delete an existing subscription to provision 5GLAN parameters.

5.7.1.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-5glan-pp/v1/{afld}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.7.1.3.2-1.

Table 5.7.1.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	string	Identifier of the AF.
subscriptionId	string	Identifier of the subscription resource.

5.7.1.3.3 Resource Methods

5.7.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.7.1.3.2.

5.7.1.3.3.2 GET

The GET method allows to read the active subscription for a given AF and subscription Id. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.7.1.3.3.2-1.

Table 5.7.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.7.1.3.3.2-2 and the response data structures and response codes specified in table 5.7.1.3.3.2-3.

Table 5.7.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.7.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
5GLanParametersProvision	M	1	200 OK	The information for the subscription in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.7.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.7.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.7.1.3.3.3 PUT

The PUT method modifies an existing resource to update a subscription. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.7.1.3.3.3-1 and the response data structures and response codes specified in table 5.7.1.3.3.3-2.

Table 5.7.1.3.3.3-1: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
5GLanParametersProvision	M	1	Modify an existing subscription to provision parameters.

Table 5.7.1.3.3.3-2: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
5GLanParametersProvision	M	1	200 OK	The subscription was updated successfully.
n/a			204 No Content	The subscription was updated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

N/A			308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.7.1.3.3.3-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.7.1.3.3.3-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.7.1.3.3.4 DELETE

The DELETE method deletes an existing individual 5GLAN parameters provision subscription for a given AF. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.7.1.3.3.4-1.

Table 5.7.1.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.7.1.3.3.4-2 and the response data structures and response codes specified in table 5.7.1.3.3.4-3.

Table 5.7.1.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.7.1.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The subscription was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.7.1.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.7.1.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.7.1.3.3.5 PATCH

The PATCH method allows to change some properties of an existing resource to update a subscription. The AF shall initiate the HTTP PATCH request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.7.1.3.3.5-1 and the response data structures and response codes specified in table 5.7.1.3.3.5-2.

Table 5.7.1.3.3.5-1: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
5GLanParameter sProvisionPatch	M	1	Modify an existing subscription to provision parameters.

Table 5.7.1.3.3.5-2: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
5GLanParameter sProvision	M	1	200 OK	The subscription was updated successfully.
n/a			204 No Content	The subscription was updated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.7.1.3.3.5-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.7.1.3.3.5-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.7.1A Notifications

Notifications are not applicable to this API.

5.7.2 Data Model

5.7.2.1 General

This clause specifies the application data model supported by the 5GLANParameterProvision API.

Table 5.7.2.1-1 specifies the data types defined for the 5GLANParameterProvision API.

Table 5.7.2.1-1: 5GLANParameterProvision API specific Data Types

Data type	Clause defined	Description	Applicability
5GLanParameters	5.7.2.3.3	Represents 5G LAN service related parameters that need to be provisioned.	
5GLanParametersPatch	5.7.2.3.6	Represents 5G LAN service related parameters that need to be modified.	
5GLanParametersProvision	5.7.2.3.2	Represents an individual 5G LAN parameters provision subscription resource.	
5GLanParametersProvisionPatch	5.7.2.3.5	Represents the 5G LAN parameters to request the modification of a subscription to provision parameters.	
AaaUsage	5.7.2.4.3	Represents the usage of the DN-AAA server.	
AppDescriptor	5.7.2.3.4	Represents an operation system and the corresponding applications.	
AppDescriptorRm	5.7.2.3.7	Represents the same as the AppDescriptor data type but with the "nullable: true" property.	

5.7.2.2 Reused data types

The data types reused by the 5GLANParameterProvision API from other specifications are listed in table 5.7.2.2-1.

Table 5.7.2.2-1: Re-used Data Types

Data type	Reference	Comments
ApplicationId	3GPP TS 29.571 [8]	
Dnn	3GPP TS 29.571 [8]	Identifies a DNN.
ExternalGroupId	3GPP TS 29.122 [4]	External Group Identifier for a user group.
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
Ipv4Addr	3GPP TS 29.571 [8]	Identifies an IPv4 address.
Ipv6Addr	3GPP TS 29.571 [8]	Identifies an IPv6 address.
Link	3GPP TS 29.122 [4]	Identifies a referenced resource.
MtcProviderInformation	3GPP TS 29.571 [8]	Indicates MTC provider information for 5G VN Group Configuration authorization.
OsId	3GPP TS 29.519 [23]	Operating System.
PduSessionType	3GPP TS 29.571 [8]	PDU session type.
Snsai	3GPP TS 29.571 [8]	Identifies the S-NSSAI.
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.7.3-1.

5.7.2.3 Structured data types

5.7.2.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.7.2.3.2 Type: 5GLanParametersProvision

Table 5.7.2.3.2-1: Definition of type 5GLanParametersProvision

Attribute name	Data type	P	Cardinality	Description	Applicability
self	Link	C	0..1	Identifies the individual parameters provision subscription resource. Shall be present in the HTTP GET response when reading all the subscriptions for an AF.	
5gLanParams	5GLanParameters	M	1	Represents the 5G LAN service related parameters.	
suppFeat	SupportedFeatures	M	1	Indicates the negotiated supported features.	

5.7.2.3.3 Type: 5GLanParameters

This type represents the 5G LAN service related parameters need to be provisioned.

Table 5.7.2.3.3-1: Definition of type 5GLanParameters

Attribute name	Data type	P	Cardinality	Description	Applicability
exterGroupld	ExternalGroupld	M	1	Identifies an 5G Virtual Network Group.	
gpsis	map(Gpsi)	M	1..N	Represents the list of 5G VN Group members, each member is identified by GPSI. Any string value can be used as a key of the map.	
dnn	Dnn	M	1	DNN for the 5G VN group, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only.	
aaalpv4Addr	Ipv4Addr	O	1	Identifies the DN-AAA server IPv4 address provided by AF, for the secondary authentication/authorization and/or UE IP address allocation by DN-AAA server.	
aaalpv6Addr	Ipv6Addr	O	1	Identifies the DN-AAA server IPv6 address provided by AF, for the secondary authentication/authorization and/or UE IP address allocation by DN-AAA server.	
aaaUsgs	array(AaaUsage)	O	1..2	Identifies the usage needs for secondary authentication/authorization and/or UE IP address allocation from the DN-AAA server.	
mtcProviderld	MtcProviderInformation	O	0..1	Indicates MTC provider information for 5G VN Group Configuration authorization. (NOTE 1)	
snssai	Snssai	M	1	S-NSSAI for the 5G VN group.	
sessionType	PduSessionType	M	1	PDU Session Type allowed for 5G VN group.	
sessionTypes	array(PduSessionType)	O	1..N	If further PDU Session Types (in addition to the PDU Session Type indicated in the "sessionType" attribute) are allowed for the 5G VN group, they are provided in this attribute. (NOTE 2)	multipleSessionTypes
appDesps	map(AppDescriptor)	M	1..N	Describes the operation systems and the corresponding applications for each operation systems. The key of map is osId.	
<p>NOTE 1: The NEF should check received MTC Provider information and then the NEF may:</p> <ul style="list-style-type: none"> - override it with local configured value and send it to UDM; - send it directly to the UDM; or - reject the 5G VN Group Configuration request. <p>NOTE 2: Only one PDU Session type is applied for a PDU Session of a VN group at a time.</p>					

5.7.2.3.4 Type: AppDescriptor

Table 5.7.2.3.4-1: Definition of type AppDescriptor

Attribute name	Data type	P	Cardinality	Description	Applicability
osId	OsId	M	1	Identifies an operating system supported by the UE.	
applds	map(ApplicationId)	M	1..N	Identifies applications that is running on the UE's operating system. Any string value can be used as a key of the map.	

5.7.2.3.5 Type: 5GLanParametersProvisionPatch

Table 5.7.2.3.5-1: Definition of type 5GLanParametersProvisionPatch

Attribute name	Data type	P	Cardinality	Description	Applicability
5gLanParamsPatch	5GLanParametersPatch	O	0..1	Represents the 5G LAN service related parameters. This attribute is deprecated. The "5gLanParams" attribute should be used instead.	
5gLanParams	5GLanParameters	O	0..1	Represents the updated 5G LAN service related parameters.	

5.7.2.3.6 Type: 5GLanParametersPatch

This data type is deprecated.

Table 5.7.2.3.6-1: Definition of type 5GLanParametersPatch

Attribute name	Data type	P	Cardinality	Description	Applicability
gpsis	map(GpsiRm)	O	1..N	Represents the list of 5G VN Group members, each member is identified by GPSI. Any string value can be used as a key of the map.	
appDesps	map(AppDescriptorRm)	O	1..N	Describes the operation systems and the corresponding applications for each operation system. The key of map is osId.	

5.7.2.3.7 Type: AppDescriptorRm

Table 5.7.2.3.7-1: Definition of type AppDescriptorRm

Attribute name	Data type	P	Cardinality	Description	Applicability
applds	map(ApplicationIdRm)	O	1..N	Identifies application(s) on the UE's operating system. Any string value can be used as a key of the map.	

5.7.2.3.8 Void

5.7.2.4 Simple data types and enumerations

5.7.2.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.7.2.4.2 Simple data types

The simple data types defined in table 5.7.2.4.2-1 shall be supported.

Table 5.7.2.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.7.2.4.3 Enumeration: AaaUsage

Table 5.7.2.4.3-1: Enumeration AaaUsage

The enumeration AaaUsage represents the usage of the DN-AAA server.

Enumeration value	Description
"AUTH"	Secondary authentication/authorization by DN-AAA server
"IP_ALLOC"	UE IP address allocation by DN-AAA server

5.7.3 Used Features

The table below defines the features applicable to the 5GLANParameterProvision API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.7.3-1: Features used by 5GLANParameterProvision API

Feature number	Feature Name	Description
1	multipleSessionTypes	Indicates that multiple allowed PDU Session Types can be provided for a 5G VN group.

5.7.4 Error handling

5.7.4.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.7.4.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the 5GLANParameterProvision API.

5.7.4.3 Application Errors

The application errors defined for 5GLANParameterProvision API are listed in table 5.7.4.3-1.

Table 5.7.4.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

5.8 ApplyingBdtPolicy API

5.8.1 Resources

5.8.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-applying-bdt-policy/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-applying-bdt-policy" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.8.1.1-1 and the resources and HTTP methods used for the ApplyingBdtPolicy API.

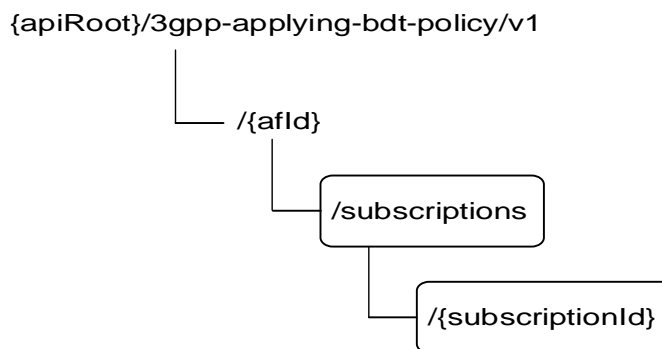


Figure 5.8.1.1-1: Resource URI structure of the ApplyingBdtPolicy API

Table 5.8.1.1-1 provides an overview of the resources and HTTP methods applicable for the ApplyingBdtPolicy API.

Table 5.8.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
Applied BDT Policy Subscriptions	/{afld}/subscriptions	GET	Read all applied BDT policy subscriptions for a given AF.
		POST	Create a new applied policy subscription.
Individual Applied BDT Policy Subscription	/{afld}/subscriptions/{subscriptionId}	GET	Read an applied BDT policy subscription.
		PATCH	Modify BDT Reference ID of an existing subscription to a BDT policy.
		DELETE	Delete an applied BDT policy subscription

5.8.1.2 Resource: Applied BDT Policy Subscriptions

5.8.1.2.1 Introduction

This resource allows a AF to read all applied BDT policy subscriptions for the given AF.

5.8.1.2.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-applying-bdt-policy/v1/{afld}/subscriptions**

This resource shall support the resource URI variables defined in table 5.8.1.2.2-1.

Table 5.8.1.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	string	Identifier of the AF.

5.8.1.2.3 Resource Methods

5.8.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.8.1.2.2.

5.8.1.2.3.2 GET

The GET method allows to read all active applied BDT policy subscriptions for a given AF. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.8.1.2.3.2-1.

Table 5.8.1.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.8.1.2.3.2-2 and the response data structures and response codes specified in table 5.8.1.2.3.2-3.

Table 5.8.1.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.8.1.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(AppliedBdt Policy)	M	0..N	200 OK	The applied BDT Policy subscriptions for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.8.1.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.8.1.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.8.1.2.3.3 POST

The POST method creates an applied BDT policy subscription for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.8.1.2.3.3-1 and the response data structures and response codes specified in table 5.8.1.2.3.3-2.

Table 5.8.1.2.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AppliedBdtPolicy	M	1	Parameters to create a subscription of the applied BDT policy.

Table 5.8.1.2.3.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AppliedBdtPolicy	M	1	201 Created	The subscription was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.

NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.8.1.2.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-applying-bdt-policy/v1/{afId}/subscriptions/{SubscriptionId}

5.8.1.3 Resource: Individual Applied BDT Policy Subscription

5.8.1.3.1 Introduction

This resource allows a AF to read or delete an active subscription of applied BDT policy.

5.8.1.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-applying-bdt-policy/v1/{afId}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.8.1.3.2-1.

Table 5.8.1.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.
subscriptionId	string	Identifier of the subscription resource.

5.8.1.3.3 Resource Methods

5.8.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.8.1.3.2.

5.8.1.3.3.2 GET

The GET method allows to read the active applied BDT policy for a given AF and subscription Id. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.8.1.3.3.2-1.

Table 5.8.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.8.1.3.3.2-2 and the response data structures and response codes specified in table 5.8.1.3.3.2-3.

Table 5.8.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.8.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AppliedBdtPolicy	M	1	200 OK	The subscription information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.8.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.8.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.8.1.3.3.3 PATCH

The PATCH method allows to change some properties of an existing applied BDT policy subscription. The AF shall initiate the HTTP PATCH request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.8.1.3.3.3-1 and the response data structures and response codes specified in table 5.8.1.3.3.3-2.

Table 5.8.1.3.3.3-1: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
AppliedBdtPolicyPatch	M	1	Partial update of a subscription to applying BDT policy subscription.

Table 5.8.1.3.3.3-2: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AppliedBdtPolicy	M	1	200 OK	The subscription was modified successfully.
n/a			204 No Content	The subscription was modified successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

N/A			308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.8.1.3.3.3-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.8.1.3.3.3-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.8.1.3.3.4 DELETE

The DELETE method deletes an existing applied BDT policy subscription for a given AF. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.8.1.3.3.4-1.

Table 5.8.1.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.8.1.3.3.4-2 and the response data structures and response codes specified in table 5.8.1.3.3.4-3.

Table 5.8.1.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.8.1.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The subscription was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.8.1.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.8.1.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.8.2 Notifications

Notifications are not applicable to this API.

5.8.3 Data Model

5.8.3.1 General

This clause specifies the application data model supported by the ApplyingBdtPolicy API.

Table 5.8.3.1-1 specifies the data types defined for the ApplyingBdtPolicy API.

Table 5.8.3.1-1: ApplyingBdtPolicy API specific Data Types

Data type	Clause defined	Description	Applicability
AppliedBdtPolicy	5.8.3.3.2	Represents an applied BDT policy.	
AppliedBdtPolicyPatch	5.8.3.3.3	Represents the parameters to request the modification of a subscription to applied BDT policy.	

5.8.3.2 Reused data types

The data types reused by the ApplyingBdtPolicy API from other specifications are listed in table 5.8.3.2-1.

Table 5.8.3.2-1: Re-used Data Types

Data type	Reference	Comments
BdtReferenceld	3GPP TS 29.122 [4]	Identifier of a selected BDT policy.
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
ExternalGroupld	3GPP TS 29.122 [4]	External Group Identifier for a user group.
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.8.4-1.

5.8.3.3 Structured data types

5.8.3.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.8.3.3.2 Type: AppliedBdtPolicy

This type represents an applied BDT policy which is sent from the AF to the NEF.

Table 5.8.3.3.2-1: Definition of type AppliedBdtPolicy

Attribute name	Data type	P	Cardinality	Description	Applicability (NOTE)
bdtRefld	BdtReferenceld	M	1	Identifies a selected policy of background data transfer.	
gpsi	Gpsi	C	0..1	Identifies a user.	
externalGroupld	ExternalGroupld	C	0..1	Identifies a user group.	
supFeat	SupportedFeatures	M	1	Indicates the list of Supported features used as described in clause 5.8.4. This attribute shall be provided in the POST request and in the response of successful resource creation	
self	Link	C	0..1	Identifies the Individual Applied BDT Policy Subscription resource. Shall be present in the HTTP GET response when reading all the subscriptions for an AF.	
NOTE: Only one of the properties "gpsi" or "externalGroupld" shall be included.					

5.8.3.3.3 Type: AppliedBdtPolicyPatch

This type represents a subscription of applied BDT policy parameters provided by the AF to the NEF. The structure is used for HTTP PATCH request.

Table 5.8.3.3.2-1: Definition of type AppliedBdtPolicyPatch

Attribute name	Data type	P	Cardinality	Description	Applicability
bdtRefld	BdtReferenceld	M	1	Identifies a selected policy of background data transfer.	

5.8.3.4 Simple data types and enumerations

5.8.3.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.8.3.4.2 Simple data types

The simple data types defined in table 5.8.3.4.2-1 shall be supported.

Table 5.8.3.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.8.4 Used Features

The table below defines the features applicable to the ApplyingBdtPolicy API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.8.4-1: Features used by ApplyingBdtPolicy API

Feature number	Feature Name	Description

5.8.5 Error handling

5.8.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.8.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the ApplyingBdtPolicy API.

5.8.5.3 Application Errors

The application errors defined for ApplyingBdtPolicy API are listed in table 5.8.5.3-1.

Table 5.8.5.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

5.9 IPTVConfiguration API

5.9.1 Resources

5.9.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-iptvconfiguration/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-iptvconfiguration" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.9.1.1-1 and the resources and HTTP methods used for the IPTVConfiguration API.

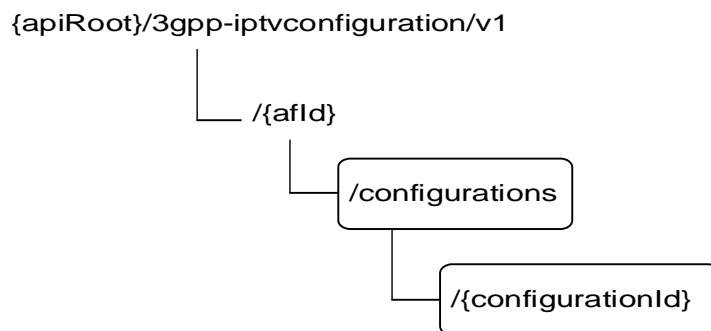


Figure 5.9.1.1-1: Resource URI structure of the IPTVConfiguration API

Table 5.9.1.1-1 provides an overview of the resources and HTTP methods applicable for the IPTVConfiguration API.

Table 5.9.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
IPTV Configurations	/{afId}/configurations	GET	Read all configurations for a given AF
		POST	Create a new IPTV configuration
Individual IPTV Configuration	/{afId}/configurations/{configurationId}	GET	Read an existing configuration identified by {configurationId}
		PUT	Modify all of the properties of an existing configuration identified by {configurationId}
		PATCH	Modify some of the properties of an existing configuration identified by {configurationId}
		DELETE	Delete a configuration identified by {configurationId}

5.9.1.2 Resource: IPTV Configurations

5.9.1.2.1 Introduction

This resource allows a AF to read all active IPTV configurations for the given AF, or create an new individual IPTV configuration in the NEF.

5.9.1.2.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-iptvconfiguration/v1/{afId}/configurations**

This resource shall support the resource URI variables defined in table 5.9.1.2.2-1.

Table 5.9.1.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.

5.9.1.2.3 Resource Methods

5.9.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.9.1.2.2.

5.9.1.2.3.2 GET

The GET method allows to read all active configurations for a given AF. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.9.1.2.3.2-1.

Table 5.9.1.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.9.1.2.3.2-2 and the response data structures and response codes specified in table 5.9.1.2.3.2-3.

Table 5.9.1.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.9.1.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(IptvConfigData)	M	0..N	200 OK	All the configuration information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.9.1.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.9.1.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.9.1.2.3.3 POST

The POST method creates a new resource to individual IPTV configuration for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.9.1.2.3.3-1 and the response data structures and response codes specified in table 5.9.1.2.3.3-2.

Table 5.9.1.2.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
IptvConfigData	M	1	Parameters to create an IPTV Configuration resource.

Table 5.9.1.2.3.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
IptvConfigData	M	1	201 Created	The configuration resource was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.9.1.2.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-iptvconfiguration/v1/{afId}/configurations/{configurationId}

5.9.1.3 Resource: Individual IPTV Configuration

5.9.1.3.1 Introduction

This resource allows a AF to read, update or delete an existing IPTV Configuration.

5.9.1.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-iptvconfiguration/v1/{afId}/configurations/{configurationId}

This resource shall support the resource URI variables defined in table 5.9.1.3.2-1.

Table 5.9.1.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.
configurationId	string	Identifier of the configuration resource.

5.9.1.3.3 Resource Methods

5.9.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.9.1.3.2.

5.9.1.3.3.2 GET

The GET method allows to read the active configuration for a given AF and subscription Id. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.9.1.3.3.2-1.

Table 5.9.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.9.1.3.3.2-2 and the response data structures and response codes specified in table 5.9.1.3.3.2-3.

Table 5.9.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.9.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
IptvConfigData	M	1	200 OK	The information for the configuration in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.9.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.9.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.9.1.3.3.3 PUT

The PUT method modifies an existing resource to update a configuration. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.9.1.3.3.3-1 and the response data structures and response codes specified in table 5.9.1.3.3.3-2.

Table 5.9.1.3.3.3-1: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
IptvConfigData	M	1	Modify an existing configuration.

Table 5.9.1.3.3.3-2: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
IptvConfigData	M	1	200 OK	The configuration resource was updated successfully.
n/a			204 No Content	The configuration resource was updated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.9.1.3.3.3-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.9.1.3.3.3-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.9.1.3.3.4 DELETE

The DELETE method deletes an existing individual configuration for a given AF. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.9.1.3.3.4-1.

Table 5.9.1.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.9.1.3.3.4-2 and the response data structures and response codes specified in table 5.9.1.3.3.4-3.

Table 5.9.1.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.9.1.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The configuration resource was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.9.1.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.9.1.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.9.1.3.3.5 PATCH

The PATCH method allows to change some properties of an existing resource to update a configuration. The AF shall initiate the HTTP PATCH request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.9.1.3.3.5-1 and the response data structures and response codes specified in table 5.9.1.3.3.5-2.

Table 5.9.1.3.3.5-1: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
IptvConfigDataPatch	M	1	Partial update an existing configuration.

Table 5.9.1.3.3.5-2: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
IptvConfigData	M	1	200 OK	The configuration resource was updated successfully.
n/a			204 No Content	The configuration resource was updated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.9.1.3.3.5-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.9.1.3.3.5-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.9.1A Notifications

Notifications are not applicable to this API.

5.9.2 Data Model

5.9.2.1 General

This clause specifies the application data model supported by the IPTVConfiguration API.

Table 5.9.2.1-1 specifies the data types defined for the IPTVConfiguration API.

Table 5.9.2.1-1: IPTVConfiguration API specific Data Types

Data type	Clause defined	Description	Applicability
AccessRightStatus	5.9.2.4.3	Represents the access right status for parameter provision.	
IptvConfigData	5.9.2.3.2	Represents an individual IPTV Configuration resource.	
IptvConfigDataPatch	5.9.2.3.4	Represents the parameters to request the modification of an IPTV Configuration resource.	
MulticastAccessControl	5.9.2.3.3	Represents multicast address access control information.	

5.9.2.2 Reused data types

The data types reused by the IPTVConfiguration API from other specifications are listed in table 5.9.2.2-1.

Table 5.9.2.2-1: Re-used Data Types

Data type	Reference	Comments
Dnn	3GPP TS 29.571 [8]	Identifies a DNN.
ExternalGroupId	3GPP TS 29.122 [4]	External Group Identifier for a user group.
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
Ipv4Addr	3GPP TS 29.571 [8]	Identifies an IPv4 address.
Ipv6Addr	3GPP TS 29.571 [8]	Identifies an IPv6 address.
Link	3GPP TS 29.122 [4]	
MtcProviderInformation	3GPP TS 29.571 [8]	Indicates MTC provider information.
Snsai	3GPP TS 29.571 [8]	Identifies the S-NSSAI.
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.9.3-1.

5.9.2.3 Structured data types

5.9.2.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.9.2.3.2 Type: IptvConfigData

Table 5.9.2.3.2-1: Definition of type IptvConfigData

Attribute name	Data type	P	Cardinality	Description	Applicability
self	Link	C	0..1	Identifies the individual IPTV configuration resource URI. Shall be present in the HTTP GET response when reading all the configurations for an AF.	
gpsi	Gpsi	C	0..1	Identifies GPSI. (NOTE)	
exterGroupld	ExternalGroupld	C	0..1	Represents a group of users. (NOTE)	
afAppld	string	M	1	Identifies an application.	
dnn	Dnn	O	0..1	Identifies a DNN, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only.	
snsai	Snssai	O	0..1	Identifies an S-NSSAI.	
multiAccCtrls	map(MulticastAccessControl)	M	1..N	Identifies a list of multicast address access control information. Any string value can be used as a key of the map.	
mtcProviderld	MtcProviderInformation	O	0..1	Indicates MTC provider information.	
suppFeat	SupportedFeatures	M	1	Indicates the negotiated supported features.	
NOTE: Only one of the "gpsi" or "exterGroupld" attribute shall be provided.					

5.9.2.3.3 Type: MulticastAccessControl

Table 5.9.2.3.3-1: Definition of type MulticastAccessControl

Attribute name	Data type	P	Cardinality	Description	Applicability
srcIpv4Addr	Ipv4Addr	O	0..1	Identifies the source IPv4 address of IPTV multicast channel.	
srcIpv6Addr	Ipv6Addr	O	0..1	Identifies the source IPv6 address of IPTV multicast channel.	
multicastV4Addr	Ipv4Addr	O	0..1	Identifies the multicast IPv4 address of IPTV multicast channel. (NOTE)	
multicastV6Addr	Ipv6Addr	O	0..1	Identifies the multicast IPv6 address of IPTV multicast channel. (NOTE)	
accStatus	AccessRightStatus	M	1	Represents access right status of the multicast channel.	
NOTE: At least one of the "multicastV4Addr" or "multicastV6Addr" attribute shall be provided.					

5.9.2.3.4 Type: IptvConfigDataPatch

Table 5.9.2.3.4-1: Definition of type IptvConfigDataPatch

Attribute name	Data type	P	Cardinality	Description	Applicability
multiAccCtrls	map(MulticastAccessControl)	O	1..N	Identifies a list of multicast address access control information. Any string value can be used as a key of the map.	

5.9.2.4 Simple data types and enumerations

5.9.2.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.9.2.4.2 Simple data types

The simple data types defined in table 5.9.2.4.2-1 shall be supported.

Table 5.9.2.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.9.2.4.3 Enumeration: AccessRightStatus

The enumeration AccessRightStatus represents the parameters provision type of which the AF requests to provision. It shall comply with the provisions defined in table 5.9.2.4.3-1.

Table 5.9.2.4.3-1: Enumeration AccessRightStatus

Enumeration value	Description
FULLY_ALLOWED	The User is fully allowed to access to the channel.
PREVIEW_ALLOWED	The User is preview allowed to access to the channel.
NO_ALLOWED	The User is not allowed to access to the channel.

5.9.3 Used Features

The table below defines the features applicable to the IPTVConfiguration API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.9.3-1: Features used by IPTVConfiguration API

Feature number	Feature Name	Description

5.9.4 Error handling

5.9.4.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.9.4.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the IPTVConfiguration API.

5.9.4.3 Application Errors

The application errors defined for IPTVConfiguration API are listed in table 5.9.4.3-1.

Table 5.9.4.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

5.10 LpiParameterProvision API

5.10.1 Resources

5.10.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-lpi-pp/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-lpi-pp" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.10.1.1-1 and the resources and HTTP methods used for the LpiParameterProvision API.

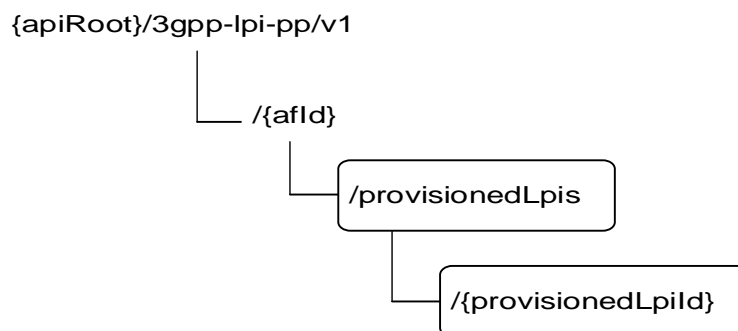


Figure 5.10.1.1-1: Resource URI structure of the LpiParameterProvision API

Table 5.10.1.1-1 provides an overview of the resources and HTTP methods applicable for the LpiParameterProvision API.

Table 5.10.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
LPI Parameters Provisionings	/{afld}/provisionedLpis (NOTE)	GET	Read all LPI Parameters Provisioning resources for a given AF
		POST	Create a new Individual LPI Parameters Provisioning resource
Individual LPI Parameters Provisioning	/{afld}/provisionedLpis/{provisionedLpild} (NOTE)	GET	Read an existing Individual LPI Parameters Provisioning resource identified by {provisionedLpild}
		PUT	Update all of the properties of an existing Individual LPI Parameters Provisioning resource identified by {provisionedLpild}
		PATCH	Modify an existing Individual LPI Parameters Provisioning resource identified by {provisionedLpild}.
		DELETE	Delete an existing Individual LPI Parameters Provisioning resource identified by {provisionedLpild}
NOTE: The path segment "provisionedLpis" does not follow the related naming convention defined in clause 5.2. The path segment is however kept as currently defined in this specification for backward compatibility considerations.			

5.10.1.2 Resource: LPI Parameters Provisionings

5.10.1.2.1 Introduction

This resource allows a AF to read all active LPI Parameters Provisionings for the given AF, or create an new individual LPI Parameters Provisioning resource to provision parameters to the NEF.

5.10.1.2.2 Resource Definition

Resource URI: {apiRoot}/3gpp-lpi-pp/v1/{afld}/provisionedLpis

This resource shall support the resource URI variables defined in table 5.10.1.2.2-1.

Table 5.10.1.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	string	Identifier of the AF.

5.10.1.2.3 Resource Methods

5.10.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.10.1.2.3.

5.10.1.2.3.2 GET

The GET method allows to read all active LPI Parameters Provisioning resources for a given AF. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.10.1.2.3.2-1.

Table 5.10.1.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.10.1.2.3.2-2 and the response data structures and response codes specified in table 5.10.1.2.3.2-3.

Table 5.10.1.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.10.1.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(LpiParametersProvision)	M	0..N	200 OK	All the LPI Parameters Provisioning information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.10.1.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.10.1.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.10.1.2.3.3 POST

The POST method creates a new resource to LPI Parameters Provisionings for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.10.1.2.3.3-1 and the response data structures and response codes specified in table 5.10.1.2.3.3-2.

Table 5.10.1.2.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
LpiParametersProvision	M	1	Parameters to create an Individual LPI Parameters Provisioning resource to provision parameters.

Table 5.10.1.2.3.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
LpiParametersProvision	M	1	201 Created	The resource was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.10.1.2.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-lpi-pp/v1/{afld}/provisionedLpis/{provisionedLpild}

5.10.1.3 Resource: Individual LPI Parameters Provisioning

5.10.1.3.1 Introduction

This resource allows a AF to read, update or delete an existing Individual LPI Parameters Provisioning resource.

5.10.1.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-lpi-pp/v1/{afld}/provisionedLpis/{provisionedLpild}

This resource shall support the resource URI variables defined in table 5.10.1.3.2-1.

Table 5.10.1.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	string	Identifier of the AF.
provisionedLpild	string	Identifier of the provisioning resource.

5.10.1.3.3 Resource Methods

5.10.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.10.1.3.3.

5.10.1.3.3.2 GET

The GET method allows to read an active Individual LPI Parameters Provisioning resource for a given AF and provisionedLpId. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.10.1.3.3.2-1.

Table 5.10.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.10.1.3.3.2-2 and the response data structures and response codes specified in table 5.10.1.3.3.2-3.

Table 5.10.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.10.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
LpiParametersProvision	M	1	200 OK	The information for the source in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during resource retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.10.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.10.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.10.1.3.3.3 PUT

The PUT method updates an existing resource to update an existing Individual LPI Parameters Provisioning resource. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.10.1.3.3.3-1 and the response data structures and response codes specified in table 5.10.1.3.3.3-2.

Table 5.10.1.3.3.3-1: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
LpiParametersProvision	M	1	Update an existing individual LPI Parameters Provisioning resource to provision parameters.

Table 5.10.1.3.3.3-2: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
LpiParametersProvision	M	1	200 OK	The resource was updated successfully and a representation of the updated resource is returned.

n/a			204 No Content	The resource was updated successfully and no additional content is sent in the response message.
n/a			307 Temporary Redirect	Temporary redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during resource modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.10.1.3.3.3-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.10.1.3.3.3-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.10.1.3.3.3A PATCH

The PATCH method modifies an existing resource to update an existing individual LPI Parameters Provisioning resource. The AF shall initiate the HTTP PATCH request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.10.1.3.3.3A-1 and the response data structures and response codes specified in table 5.10.1.3.3.3A-2.

Table 5.10.1.3.3.3A-1: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
LpiParametersProvisionPatch	M	1	Modify an existing individual LPI Parameters Provisioning resource to provision parameters.

Table 5.10.1.3.3.3A-2: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
LpiParametersProvision	M	1	200 OK	The resource was updated successfully and a representation of the updated resource is returned.
n/a			204 No Content	The resource was updated successfully and no additional content is sent in the response message.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.10.1.3.3.3A-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.10.1.3.3.3A-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.10.1.3.3.4 DELETE

The DELETE method deletes an existing individual LPI Parameters Provisioning resource for a given AF. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.10.1.3.3.4-1.

Table 5.10.1.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.10.1.3.3.4-2 and the response data structures and response codes specified in table 5.10.1.3.3.4-3.

Table 5.10.1.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.10.1.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The resource was removed successfully.
N/A			307 Temporary Redirect	Temporary redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during resource termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.10.1.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.10.1.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.10.2 Data Model

5.10.2.1 General

This clause specifies the application data model supported by the LpiParameterProvision API.

Table 5.10.2.1-1 specifies the data types defined for the LpiParameterProvision API.

Table 5.10.2.1-1: LpiParameterProvision API specific Data Types

Data type	Clause defined	Description	Applicability
LpiParametersProvision	5.10.2.3.2	Represents an individual LPI Parameters Provisioning resource.	

5.10.2.2 Reused data types

The data types reused by the LpiParameterProvision API from other specifications are listed in table 5.10.2.2-1.

Table 5.10.2.2-1: Re-used Data Types

Data type	Reference	Comments
ExternalGroupId	3GPP TS 29.122 [4]	External Group Identifier for a user group.
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
Link	3GPP TS 29.122 [4]	Identifies a referenced resource.
Lpi	3GPP TS 29.503 [17]	Identifies the Location Privacy Indication information.
MtcProviderInformation	3GPP TS 29.571 [8]	Indicates MTC provider information for LCS privacy parameter configuration authorization.
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.10.3-1.

5.10.2.3 Structured data types

5.10.2.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.10.2.3.2 Type: LpiParametersProvision

Table 5.10.2.3.2-1: Definition of type LpiParametersProvision

Attribute name	Data type	P	Cardinality	Description	Applicability
self	Link	C	0..1	Identifies the individual parameters provisioning resource. This attribute shall be supplied by the NEF in HTTP responses that include an object of LpiParametersProvision type.	
exterGroupId	ExternalGroupId	O	0..1	Identifies a group of UEs. (NOTE 1)	
gpsi	Gpsi	O	0..1	Identifies an UE with GPSI. (NOTE 1))	
lpi	Lpi	M	1	Location Privacy Indication parameters	
mtcProviderId	MtcProviderInformation	O	0..1	Indicates MTC provider information for LCS privacy parameter configuration authorization. (NOTE 2))	
suppFeat	SupportedFeatures	M	1	Indicates the negotiated supported features.	
NOTE 1: Only one of the "gpsi" or "exterGroupId" attribute shall be provided.					
NOTE 2: The NEF should check received MTC Provider information and then the NEF may:					
<ul style="list-style-type: none"> - override it with local configured value and send it to UDM; - send it directly to the UDM; or - reject the LPI Parameter Provisioning request. 					

5.10.2.3.3 Type: LpiParametersProvisionPatch

Table 5.10.2.3.3-1: Definition of type LpiParametersProvisionPatch

Attribute name	Data type	P	Cardinality	Description	Applicability
lpi	Lpi	O	1	Location Privacy Indication parameters	
mtcProviderId	MtcProviderInformation	O	0..1	Indicates MTC provider information for LCS privacy parameter configuration authorization. (NOTE 1)	
NOTE 1: The NEF should check received MTC Provider information and then the NEF may:					
<ul style="list-style-type: none"> - override it with local configured value and send it to UDM; - send it directly to the UDM; or - reject the LPI Parameter Provisioning modification request. 					

5.10.2.4 Simple data types and enumerations

5.10.2.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.10.2.4.2 Simple data types

The simple data types defined in table 5.10.2.4.2-1 shall be supported.

Table 5.10.2.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.10.3 Used Features

The table below defines the features applicable to the LpiParameterProvision API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.10.3-1: Features used by LpiParameterProvision API

Feature number	Feature Name	Description
1	PatchUpdate	Indicates the support of enhancements to the northbound interfaces (e.g. support the partial modification of an existing resource).

5.10.4 Error handling

5.10.4.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.10.4.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the LpiParameterProvision API.

5.10.4.3 Application Errors

The application errors defined for LpiParameterProvision API are listed in table 5.10.4.3-1.

Table 5.10.4.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

5.11 ServiceParameter API

5.11.1 Resources

5.11.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-service-parameter/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-service-parameter" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.11.1.1-1 and the resources and HTTP methods used for the ServiceParameter API.

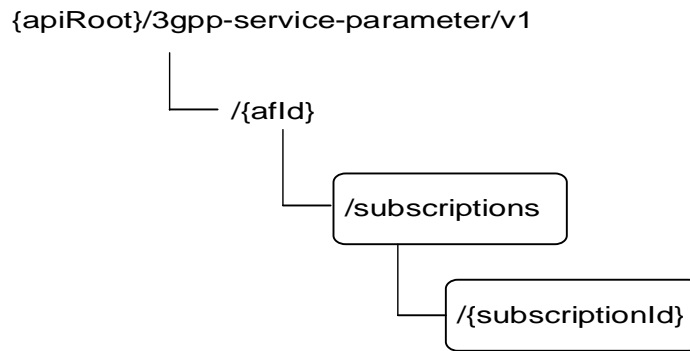


Figure 5.11.1.1-1: Resource URI structure of the ServiceParameter API

Table 5.11.1.1-1 provides an overview of the resources and HTTP methods applicable for the ServiceParameter API.

Table 5.11.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
Service Parameter Subscriptions	/{afId}/subscriptions	GET	Read all subscriptions for a given AF.
		POST	Create a new service parameter subscription.
Individual Service Parameter Subscription	/{afId}/subscriptions/{subscriptionId}	GET	Read an existing subscription identified by {subscriptionId}
		PUT	Modify all of the properties of an existing subscription identified by {subscriptionId}
		PATCH	Modify some of the properties of an existing subscription identified by {subscriptionId}
		DELETE	Delete a subscription identified by {subscriptionId}

5.11.1.2 Resource: Service Parameter Subscriptions

5.11.1.2.1 Introduction

This resource allows a AF to read all active Service Parameter Subscriptions for the given AF, or create an new individual service parameter subscription in the NEF.

5.11.1.2.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-service-parameter/v1/{afId}/subscriptions**

This resource shall support the resource URI variables defined in table 5.11.1.2.2-1.

Table 5.11.1.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.

5.11.1.2.3 Resource Methods

5.11.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.11.1.2.3.

5.11.1.2.3.2 GET

The GET method allows to read all active subscriptions for a given AF. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.11.1.2.3.2-1.

Table 5.11.1.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
gpsis	array(Gpsi)	O	1..N	The GPSI of the requested UE(s).	EnNB
ip-addr	array(IpAddr)	O	1..N	The IP address(es) of the requested UE(s).	EnNB
ip-domain	string	O	1	The IPv4 address domain identifier. The attribute may only be provided if IPv4 address is included in the ip-addr query parameter.	EnNB
mac-addr	array(MacAddr48)	O	1..N	The MAC address(es) of the requested UE(s).	EnNB
NOTE: One of the "gpsis" parameter, the "ip-addr" parameter or the "mac-addr" parameter may be provided in the same request. If multiple elements are provided in the array data structure, then each element shall be treated as a separate query parameter.					

This method shall support the request data structures specified in table 5.11.1.2.3.2-2 and the response data structures and response codes specified in table 5.11.1.2.3.2-3.

Table 5.11.1.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.11.1.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(ServiceParameterData)	M	0..N	200 OK	All the subscription information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.11.1.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.11.1.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.11.1.2.3.3 POST

The POST method creates a new resource to individual service parameter subscription for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.11.1.2.3.3-1 and the response data structures and response codes specified in table 5.11.1.2.3.3-2.

Table 5.11.1.2.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
ServiceParameter Data	M	1	Parameters to create a service parameter subscription resource.

Table 5.11.1.2.3.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
ServiceParameter Data	M	1	201 Created	The subscription resource was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.11.1.2.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-service-parameter/v1/{afId}/subscriptions/{subscriptionId}

5.11.1.3 Resource: Individual Service Parameter Subscription

5.11.1.3.1 Introduction

This resource allows a AF to read, update or delete an existing service parameter subscription.

5.11.1.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-service-parameter/v1/{afId}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.9.1.3.2-1.

Table 5.11.1.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.
subscriptionId	string	Identifier of the subscription resource.

5.11.1.3.3 Resource Methods

5.11.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.11.1.3.3.

5.11.1.3.3.2 GET

The GET method allows to read the active subscription for a given AF and subscription Id. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.11.1.3.3.2-1.

Table 5.11.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.11.1.3.3.2-2 and the response data structures and response codes specified in table 5.11.1.3.3.2-3.

Table 5.11.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.11.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
ServiceParameter Data	M	1	200 OK	The information for the subscription in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.11.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.11.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.11.1.3.3.3 PUT

The PUT method modifies an existing resource to update a configuration. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.9.1.3.3.3-1 and the response data structures and response codes specified in table 5.9.1.3.3.3-2.

Table 5.11.1.3.3.3-1: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
ServiceParameter Data	M	1	Modify an existing subscription.

Table 5.11.1.3.3.3-2: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
ServiceParameter Data	M	1	200 OK	The subscription resource was updated successfully.
n/a			204 No Content	The subscription resource was updated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.11.1.3.3.3-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.11.1.3.3.3-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.11.1.3.3.4 DELETE

The DELETE method deletes an existing individual subscription for a given AF. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.11.1.3.3.4-1.

Table 5.11.1.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.11.1.3.3.4-2 and the response data structures and response codes specified in table 5.11.1.3.3.4-3.

Table 5.11.1.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.11.1.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The subscription resource was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.11.1.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.11.1.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.11.1.3.3.5 PATCH

The PATCH method allows to change some properties of an existing resource to update a subscription. The AF shall initiate the HTTP PATCH request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.11.1.3.3.5-1 and the response data structures and response codes specified in table 5.11.1.3.3.5-2.

Table 5.11.1.3.3.5-1: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
ServiceParameter DataPatch	M	1	Partial update an existing subscription.

Table 5.11.1.3.3.5-2: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
ServiceParameter Data	M	1	200 OK	The subscription resource was updated successfully.

N/A			204 No Content	The subscription resource was updated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.11.1.3.3.5-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.11.1.3.3.5-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.11.1A Notifications

5.11.1A.1 Introduction

Upon NEF notify a Service Parameter Authorization Update (e.g. to revoke an authorization) to AF, or forward a notification event related to invocation of service parameter provisioning, e.g. the notification of outcome of UE Policies Delivery to AF, the NEF shall send an HTTP POST message including the notified event to the AF. The NEF and the AF shall support the notification mechanism as described in clause 5.2.5 of 3GPP TS 29.122 [4].

Table 5.11.1A.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
AF Notifications	{notificationDestination}	POST	The notification of service parameter authorization updates and/or notification event related to the result of invocation of service parameter provisioning.

5.11.1A.2 AF Notifications

5.11.1A.2.1 Description

The AF Notifications are used by the NEF to send the Service Parameter Authorization Update (e.g. to revoke an authorization) to the AF, and/or to send AF subscribed event notification of the outcome related to the invocation of service parameter provisioning to the AF.

5.11.1A.2.2 Target URI

The Callback URI "{notificationDestination}" shall be used with the callback URI variables defined in table 5.11.1A.2.2-1.

Table 5.11.1A.2.2-1: Callback URI variables

Name	Data type	Definition
notificationDestination	Link	Callback reference provided by the AF during creation/modification of the subscription within the ServiceParameterData data type as defined in Table 5.11.2.3.2-1 or the ServiceParameterDataPatch data type as defined in Table 5.11.2.3.3-1.

5.11.1A.3 Operation Definition

5.11.1A.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.11.1A.3.1-1 and the response data structure with response codes specified in table 5.11.1A.3.1-2.

Table 5.11.1A.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
array(AfNotification)	M	1..N	Notifications upon AF Service Parameter Authorization Update, and/or AF subscribed event notification of the outcome related to the invocation of service parameter provisioning.

Table 5.11.1A.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The event notification is received successfully.
N/A			307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.11.1A.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

Table 5.11.1A.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

5.11.1A.3.2 Notification via WebSocket

If supported by both AF and NEF and successfully negotiated, the AF subscribed outcome event notification related to the invocation of service parameter provisioning may alternatively be delivered through the WebSocket mechanism as defined in clause 5.2.5.4 of 3GPP TS 29.122 [4].

5.11.2 Data Model

5.11.2.1 General

This clause specifies the application data model supported by the ServiceParameter API.

Table 5.11.2.1-1 specifies the data types defined for the ServiceParameter API.

Table 5.11.2.1-1: ServiceParameter API specific Data Types

Data type	Clause defined	Description	Applicability
AfNotification	5.11.2.3.6	Contains the reported event notification or the service parameters authorization update result.	AfNotifications
AuthorizationResult	5.11.2.4.4		AfNotifications
ConnectionCapabilities	5.11.2.4.6	UE application requests a network connection with certain capabilities.	AfGuideURSP
Event	5.11.2.4.3	Identifies the AF subscribed events.	AfNotifications
EventInfo	5.11.2.3.7	Indicates the event information.	AfNotifications
Failure	5.11.2.4.5	Represents the failure reason for the unsuccessful result.	AfNotifications
GeographicalArea	5.17.3.3.4	Identifies the geographical area information.	AfGuideURSP
ParameterOverPc5	5.11.2.4.2	Represents configuration parameters for V2X communications over PC5 reference point.	
ParameterOverPc5Rm	5.11.2.4.2	Represents the same as the ParameterOverPc5 data type but with the "nullable: true" property.	
ParameterOverUu	5.11.2.4.2	Represents configuration parameters for V2X communications over Uu reference point.	
ParameterOverUuRm	5.11.2.4.2	Represents the same as the ParameterOverUu data type but with the "nullable: true" property.	
ParamForProSeDc	5.11.2.4.2	Represents the service parameters for 5G ProSe direct communications.	ProSe
ParamForProSeDcRm	5.11.2.4.2	This data type is defined in the same way as the ParamForProSeDc data type, but with the OpenAPI nullable property set to true.	ProSe
ParamForProSeDd	5.11.2.4.2	Represents the service parameters for 5G ProSe direct discovery.	ProSe
ParamForProSeDdRm	5.11.2.4.2	This data type is defined in the same way as the ParamForProSeDd data type, but with the OpenAPI nullable property set to true.	ProSe
ParamForProSeRemUe	5.11.2.4.2	Represents the service parameters for 5G ProSe remote UE.	ProSe
ParamForProSeRemUeRm	5.11.2.4.2	This data type is defined in the same way as the ParamForProSeRemUe data type, but with the OpenAPI nullable property set to true.	ProSe
ParamForProSeU2NRelUe	5.11.2.4.2	Represents the service parameters for 5G ProSe UE-to-network relay UE.	ProSe
ParamForProSeU2NRelUeRm	5.11.2.4.2	This data type is defined in the same way as the ParamForProSeU2NRelUe data type, but with the OpenAPI nullable property set to true.	ProSe
RouteSelectionParameterSet	5.11.2.3.5	Contains parameters that can be used to guide the Route Selection Descriptors of the URSP.	AfGuideURSP
ServiceParameterData	5.11.2.3.2	Represents an individual Service Parameter subscription resource.	
ServiceParameterDataPatch	5.11.2.3.3	Represents the parameters to request the modification of a service parameter subscription resource.	
TrafficDescriptorComponents	5.11.2.3.8	Traffic descriptor components for the requested URSP.	AfGuideURSP
UrspRuleRequest	5.11.2.3.4	Contains parameters that can be used to guide the URSP.	AfGuideURSP

5.11.2.2 Reused data types

The data types reused by the ServiceParameter API from other specifications are listed in table 5.9.2.2-1.

Table 5.11.2.2-1: Re-used Data Types

Data type	Reference	Comments
AppDescriptor	Clause 5.7.2.3.4	Application descriptor describes the operation systems and the corresponding applications for each operation systems.
Dnn	3GPP TS 29.571 [8]	Identifies a DNN.
EthFlowDescription	3GPP TS 29.514 [7]	Defines a packet filter for an Ethernet flow.
ExternalGroupld	3GPP TS 29.122 [4]	External Group Identifier for a user group.
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
IpAddr	3GPP TS 29.571 [8]	UE IP Address.
IPv4Addr	3GPP TS 29.571 [8]	Identifies an IPv4 address.
IPv6Addr	3GPP TS 29.571 [8]	Identifies an IPv6 address.
Link	3GPP TS 29.122 [4]	
MacAddr48	3GPP TS 29.571 [8]	Identifies an MAC address.
MtcProviderInformation	3GPP TS 29.571 [8]	Indicates MTC provider information.
Snsai	3GPP TS 29.571 [8]	Identifies the S-NSSAI.
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.11.3-1.
Tai	3GPP TS 29.571 [8]	Tracking Area Identity information.
UInteger	3GPP TS 29.571 [8]	Unsigned integer.

5.11.2.3 Structured data types

5.11.2.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.11.2.3.2 Type: ServiceParameterData

Table 5.11.2.3.2-1: Definition of type ServiceParameterData

Attribute name	Data type	P	Cardinality	Description	Applicability
self	Link	C	0..1	Identifies the individual service parameter subscription resource URI. Shall be present by the NEF in HTTP responses that include an object of ServiceParameterData type.	
dnn	Dnn	O	0..1	Identifies a DNN. (NOTE 2) (NOTE 3)	
snssai	Snssai	O	0..1	Identifies an S-NSSAI. (NOTE 2) (NOTE 3)	
afServiceId	string	O	0..1	Identifies a service on behalf of which the AF is issuing the request. (NOTE 2) (NOTE 3)	
appld	string	O	0..1	Identifies an application identifier. (NOTE 2)	
gpsi	Gpsi	O	0..1	Identifies GPSI. (NOTE 1)	
ueIpv4	Ipv4Addr	O	0..1	The IPv4 address of the served UE. (NOTE 1)	
ueIpv6	Ipv6Addr	O	0..1	The IPv6 address of the served UE. (NOTE 1)	
ueMac	MacAddr48	O	0..1	The MAC address of the served UE. (NOTE 1)	
externalGroupId	ExternalGroupId	O	0..1	Represents a group of users. (NOTE 1)	
anyUeInd	boolean	O	0..1	Identifies whether the service parameters apply to any UE. This attribute shall set to "true" if applicable for any UE, otherwise, set to "false". (NOTE 1) (NOTE 3)	
subNotifEvents	array(Event)	C	1..N	Identifies the AF subscribed event(s) notifications related to AF provisioned service parameters. (NOTE 4)	AfNotifications
notificationDestination	Uri	C	0..1	Contains the callback URI to receive the notifications from the NEF. Shall be present if "subNotifEvents" attribute is included.	AfNotifications
requestTestNotification	boolean	O	0..1	Set to true by the AF to request the NEF to send a test notification as defined in clause 5.2.5.3 of 3GPP TS 29.122 [4]. Set to false or omitted otherwise.	Notification_test_event
websockNotifConfig	WebsockNotifConfig	O	0..1	Configuration parameters to set up notification delivery over WebSocket protocol.	Notification_websocket
paramOverPc5	ParameterOverPc5	O	0..1	Contains the V2X service parameters used over PC5	
paramOverUu	ParameterOverUu	O	0..1	Contains the V2X service parameters used over Uu	
paramForProSeDd	ParamForProSeDd	O	0..1	Contains the service parameters for 5G ProSe direct discovery.	ProSe
paramForProSeDc	ParamForProSeDc	O	0..1	Contains the service parameters for 5G ProSe direct communications.	ProSe
paramForProSeU2NRelUe	ParamForProSeU2NRelUe	O	0..1	Contains the service parameters for 5G ProSe UE-to-network relay UE.	ProSe
paramForProSeRemUe	ParamForProSeRemUe	O	0..1	Contains the service parameters for 5G ProSe remote UE.	ProSe
urspGuidance	array(UrspRuleRequest)	O	1..N	Contains the service parameter used to guide the URSP.	AfGuideURSP
mtcProviderId	MtcProviderInformation	O	0..1	Indicates MTC provider information.	
suppFeat	SupportedFeatures	C	0..1	Indicates the list of Supported features used as described in clause 5.11.3. This attribute shall be provided in the POST request and in the response of successful resource creation.	

NOTE 1: One of individual UE identifier (i.e. "gpsi", "uelpv4", "uelpv6" or "ueMac" attribute), External Group Identifier (i.e. "exterGroupnId" attribute) or any UE indication (i.e. "anyUeInd" attribute) shall be included. For V2X and URSP service parameter provisioning (see clause 4.4.20), only "anyUeInd", "gpsi" and "externalGroupId" attributes are applicable.
NOTE 2: Either the "afServiceId" attribute, "appld" attribute or the combination of "snssai" and "dnn" attributes shall be provided. When the feature "AfGuideURSP" is supported, only the "afServiceId" attribute shall be provided for providing guidance for URSP determination.
NOTE 3: When "anyUeInd" attribute is present, "appld" attribute, "afServiceId" attribute or the combination of "snssai" attribute and "dnn" attribute shall be provided. When the feature "AfGuideURSP" is supported, only the "afServiceId" attribute shall be provided for providing guidance for URSP determination.
NOTE 4: The attribute may be present when the individual UE identifier (i.e. "gpsi", "uelpv4", "uelpv6" or "ueMac" attribute) is present.

5.11.2.3.3 Type: ServiceParameterDataPatch

Table 5.11.2.3.3-1: Definition of type ServiceParameterDataPatch

Attribute name	Data type	P	Cardinality	Description	Applicability
paramOverPc5	ParameterOverPc5Rm	O	0..1	Contains the V2X service parameters used over PC5	
paramOverUu	ParameterOverUuRm	O	0..1	Contains the V2X service parameters used over Uu	
paramForProSeDd	ParamForProSeDdRm	O	0..1	Contains the service parameters for 5G ProSe direct discovery.	ProSe
paramForProSeDc	ParamForProSeDcRm	O	0..1	Contains the service parameters for 5G ProSe direct communications.	ProSe
paramForProSeU2NRelUE	ParamForProSeU2NRelUeRm	O	0..1	Contains the service parameters for 5G ProSe UE-to-network relay UE.	ProSe
paramForProSeRemUe	ParamForProSeRemUeRm	O	0..1	Contains the service parameters for 5G ProSe remote UE.	ProSe
urspGuidance	array(UrspRuleRequest)	O	1..N	Contains the service parameter used to guide the URSP.	AfGuideURSP
subNotifEvents	array(Event)	O	1..N	Identifies the AF subscribed event(s) notifications related to AF provisioned service parameters.	AfNotifications
notificationDestination	Uri	O	0..1	Contains the callback URI to receive the notifications from the NEF. May be present if "subNotifEvents" attribute is included.	AfNotifications

5.11.2.3.4 Type: UrspRuleRequest

Table 5.11.2.3.4-1: Definition of type UrspRuleRequest

Attribute name	Data type	P	Cardinality	Description	Applicability
trafficDesc	TrafficDescriptorComponents	O	0..1	Traffic descriptor components for the requested URSP. (NOTE 1)	
relatPrecedence	UInteger	O	0..1	Represents the relative precedence of the URSP rule within the same AF request, Lower values take precedence over higher values. Its absence means that the AF has no relative precedence requirement for the provided URSP rules.	
routeSelParamSets	array(RouteSelectionParameterSet)	O	1..N	Route Selection Parameter Sets, i.e. sets of parameters that may be used to guide the Route Selection Descriptors of the URSP. (NOTE 2)	
NOTE 1: if the "trafficDesc" attribute is not present, the NEF may derive the traffic descriptor components from the AF Service Identifier.					
NOTE 2: if the "routeSelParamSets" attribute is not present, the NEF may derive S-NSSAI/DNN and/or other related parameters from the AF Service Identifier according to SLA.					

5.11.2.3.5 Type: RouteSelectionParameterSet

Table 5.11.2.3.5-1: Definition of type RouteSelectionParameterSet

Attribute name	Data type	P	Cardinality	Description	Applicability
dnn	Dnn	O	0..1	DNN to be matched with the DNN of the PDU Session.	
snsai	Snsai	O	0..1	S-NSSAI to be matched with the S-NSSAI of the PDU Session.	
precedence	UInteger	O	0..1	Determines the order in which the Route Selection Descriptors are to be applied.	
spatialValidityAreas	array(GeographicalArea)	O	1..N	Indicates where the route selection parameters apply. It may correspond to a geographical area (e.g. a geographic shape that is known to the AF and is configured by the operator to correspond to a list of TAs).	
spatialValidityTais	array(Tai)	O	1..N	Indicates the TAs in which the route selection parameters apply. This attribute is applicable only within the 5GC and it shall not be included in the request messages of untrusted AFs for URSP guidance.	

5.11.2.3.6 Type: AfNotification

Table 5.11.2.3.6-1: Definition of type AfNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
subscription	Link	M	1	Link to the subscription resource to which this notification is related.	
reportEvent	Event	C	0..1	Identifies the reported event notification. May be present if the "subNotifEvents" attribute is included in the AF subscription transaction. (NOTE)	
authResult	AuthorizationResult	C	0..1	Indicates the service parameters authorization update result. (e.g. to revoke an authorization). (NOTE)	
gpsis	array(Gpsi)	C	1..N	Identifies the list of Gpsi(s) of the reported UE(s). May be present if the "exterGroupIid" attribute or "anyUeIid" attribute is included in the AF subscription transaction and only if the "authResult" attribute is provided.	
dnn	Dnn	O	0..1	Identifies a DNN.	
snsai	Snsai	O	0..1	Identifies an S-NSSAI.	
eventInfo	EventInfo	O	0..1	Indicates the event information.	
NOTE: At least one of "reportEvent" attribute and "authResult" attribute shall be included.					

5.11.2.3.7 Type: EventInfo

Table 5.11.2.3.7-1: Definition of type EventInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
failureCause	Failure	O	0..1	Identify the failure reason for an unsuccessful result. May present if the reportEvent attribute value is "UNSUCCESS_UE_POL_DEL_SP".	

5.11.2.3.8 Type: TrafficDescriptorComponents

Table 5.11.2.3.8-1: Definition of type TrafficDescriptorComponents

Attribute name	Data type	P	Cardinality	Description	Applicability
appDescs	map(AppDescriptor)	C	1..N	Describes the operation systems and the corresponding applications for each operation systems. The key of map is osId. (NOTE 2)	
flowDescs	array(string)	C	1..N	Destination IP 3 tuple(s) (IP address or IPv6 network prefix, port number, protocol ID of the protocol above IP). The content of the string has the same encoding as the IPFilterRule AVP value as defined in IETF RFC 6733 [54], applicable only to the destination IP 3 tuple(s). (NOTE 3)	
domainDescs	array(string)	C	1..N	FQDN(s) or a regular expression which are used as a domain name matching criteria. (NOTE 4)	
ethFlowDescs	array(EthFlowDescription)	C	1..N	Descriptor(s) for destination information of non-IP traffic in which only ethernet flow description is defined. (NOTE 3)	
dnns	array(Dnn)	C	1..N	This is matched against the DNN information provided by the application.	
connCaps	array(ConnectionCapabilities)	C	1..N	This is matched against the information provided by a UE application when it requests a network connection with certain capabilities.	
NOTE 1: At least one attribute of the above Traffic descriptor components shall be present.					
NOTE 2: The information is used to identify the Application(s) that is(are) running on the UE's OS. The OSId does not include an OS version number. The OSAppId does not include a version number for the application.					
NOTE 3: "flowDescs" attribute and "ethFlowDescs" attribute are mutually exclusive.					
NOTE 4: The match of this traffic descriptor component does not require successful DNS resolution of the FQDN provided by the UE Application.					

5.11.2.4 Simple data types and enumerations

5.11.2.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.11.2.4.2 Simple data types

The simple data types defined in table 5.11.2.4.2-1 shall be supported.

Table 5.11.2.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability
ParameterOverPc5	string	Configuration parameters for V2X communication over PC5. Its encoding shall comply with the UE policies for V2X communication over PC5 as defined in clause 5.3 of 3GPP TS 24.588 [33].	
ParameterOverPc5Rm	string	This data type is defined in the same way as the "ParameterOverPc5" data type, but with the OpenAPI "nullable: true" property.	
ParameterOverUu	string	Configuration parameters for V2X communication over Uu. Its encoding shall comply with the UE policies for V2X communication over Uu as defined in clause 5.4 of 3GPP TS 24.588 [33].	
ParameterOverUuRm	string	This data type is defined in the same way as the "ParameterOverUu" data type, but with the OpenAPI "nullable: true" property.	
ParamForProSeDd	string	Configuration parameters for 5G ProSe direct discovery. Its encoding shall comply with the UE policies for 5G ProSe direct discovery defined in clause 5.3 of 3GPP TS 24.555 [49].	ProSe
ParamForProSeDdRm	string	This data type is defined in the same way as the "ParamForProSeDd" data type, but with the OpenAPI "nullable: true" property.	ProSe
ParamForProSeDc	string	Configuration parameters for 5G ProSe direct communications. Its encoding shall comply with the UE policies for 5G ProSe direct communications defined in clause 5.4 of 3GPP TS 24.555 [49].	ProSe
ParamForProSeDcRm	string	This data type is defined in the same way as the "ParamForProSeDc" data type, but with the OpenAPI "nullable: true" property.	ProSe
ParamForProSeU2NRelUe	string	Configuration parameters for 5G ProSe UE-to-network relay UE. Its encoding shall comply with the UE policies for 5G ProSe UE-to-network relay UE defined in clause 5.5 of 3GPP TS 24.555 [49].	ProSe
ParamForProSeU2NRelUeRm	string	This data type is defined in the same way as the "ParamForProSeU2NRelUe" data type, but with the OpenAPI "nullable: true" property.	ProSe
ParamForProSeRemUe	string	Configuration parameters for 5G ProSe remote UE. Its encoding shall comply with the UE policies for 5G ProSe remote UE defined in clause 5.6 of 3GPP TS 24.555 [49].	ProSe
ParamForProSeRemUeRm	string	This data type is defined in the same way as the "ParamForProSeRemUe" data type, but with the OpenAPI "nullable: true" property.	ProSe

5.11.2.4.3 Enumeration: Event

Table 5.11.2.4.3-1: Enumeration Event

The enumeration Event represents the AF subscribe to event notification of the outcome related to the invocation of AF provisioned service parameters.

Enumeration value	Description
SUCCESS_UE_POL_DEL_SP	Successful UE Policy Delivery related to the invocation of AF provisioned Service Parameters.
UNSUCCESS_UE_POL_DEL_SP	Unsuccessful UE Policy Delivery related to the invocation of AF provisioned Service Parameters.

5.11.2.4.4 Enumeration: AuthorizationResult

The enumeration AuthorizationResult represents the NEF notify the AF about the service parameters authorization updates result, e.g. to revoke an authorization.

Table 5.11.2.4.4-1: Enumeration AuthorizationResult

Enumeration value	Description
AUTH_REVOKED	Indicated the service parameters authorization is revoked.

5.11.2.4.5 Enumeration: Failure

The enumeration Failure represents the failure reason for the unsuccessful result.

Table 5.11.2.4.5-1: Enumeration Failure

Enumeration value	Description
UNSPECIFIED	Indicates the PCF received the UE sent UE policy delivery service cause #111 (Protocol error, unspecified).
UE_NOT_REACHABLE	Indicates the PCF received the notification from the AMF that the UE is not reachable.
UNKNOWN	Indicates unknown reasons upon no response from the UE, e.g. UPDS message type is not defined or not implemented by the UE, or not compatible with the UPDS state, in which the UE shall ignore the UPDS message.
UE_TEMP_UNREACHABLE	Indicates the PCF received the notification from the AMF that the UE is not reachable but the PCF will retry again.

5.11.2.4.6 Enumeration: ConnectionCapabilities

The enumeration ConnectionCapabilities represents the information provided by a UE application when it requests a network connection with certain capabilities.

Table 5.11.2.4.6-1: Enumeration ConnectionCapabilities

Enumeration value	Description
IMS	Indicates the connection capability to support IMS service.
MMS	Indicates the connection capability to support MMS service.
SUPL	Indicates the connection capability to support SUPL service.
INTERNET	Indicates the connection capability to support Internet service.

5.11.3 Used Features

The table below defines the features applicable to the ServiceParameter API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.11.3-1: Features used by ServiceParameter API

Feature number	Feature Name	Description
1	ProSe	This feature indicates the support of UE policy and N2 information provisioning for 5G ProSe.
2	enNB	Indicates the support of enhancements to the northbound interfaces.
3	AfNotifications	This feature indicates the support of AF subscribed event(s) notifications.
4	Notification_websocket	The delivery of notifications over Websocket is supported as described in 3GPP TS 29.122 [4]. This feature requires that the Notification_test_event feature is also supported.
5	Notification_test_event	The testing of notification connection is supported as described in 3GPP TS 29.122 [4].
6	AfGuideURSP	This feature indicates the support of AF guidance for URSP determination.

5.11.4 Error handling

5.11.4.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.11.4.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the ServiceParameter API.

5.11.4.3 Application Errors

The application errors defined for ServiceParameter API are listed in table 5.11.4.3-1.

Table 5.11.4.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

5.12 ACSPParameterProvision API

5.12.1 Resources

5.12.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-acp-pp/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-acp-pp" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.12.1.1-1 and the resources and HTTP methods used for the ACSPParameterProvision API.

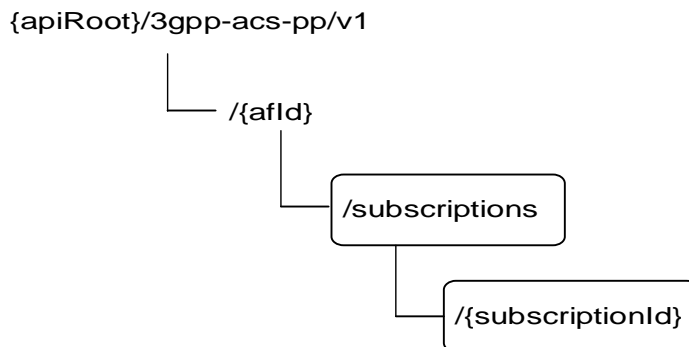


Figure 5.12.1.1-1: Resource URI structure of the ACSPParameterProvision API

Table 5.12.1.1-1 provides an overview of the resources and HTTP methods applicable for the ACSPParameterProvision API.

Table 5.12.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
ACS Configuration Subscriptions	/{afld}/subscriptions	GET	Read all subscriptions for a given AF.
		POST	Create a new ACS configuration subscription.
Individual ACS Configuration Subscription	/{afld}/subscriptions/{subscriptionId}	GET	Read an existing subscription identified by {subscriptionId}
		PUT	Update all of the properties of an existing subscription identified by {subscriptionId}.
		PATCH	Modify an existing subscription identified by {subscriptionId}.
		DELETE	Delete a subscription identified by {subscriptionId}

5.12.1.2 Resource: ACS Configuration Subscriptions

5.12.1.2.1 Introduction

This resource allows a AF to read all active ACS Configuration Subscriptions for the given AF, or create an new individual ACS Configuration subscription in the NEF.

5.12.1.2.2 Resource Definition

Resource URI: {apiRoot}/3gpp-acp-pp/v1/{afld}/subscriptions

This resource shall support the resource URI variables defined in table 5.12.1.2.2-1.

Table 5.12.1.2.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	Identifier of the AF of type string.

5.12.1.2.3 Resource Methods

5.12.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.12.1.2.3.

5.12.1.2.3.2 GET

The GET method allows to read all active subscriptions for a given AF. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.12.1.2.3.2-1.

Table 5.12.1.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.12.1.2.3.2-2 and the response data structures and response codes specified in table 5.12.1.2.3.2-3.

Table 5.12.1.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.12.1.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(AcsConfigurationData)	M	0..N	200 OK	All the subscription information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.12.1.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.12.1.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.12.1.2.3.3 POST

The POST method creates a new resource to individual ACS Configuration subscription for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.12.1.2.3.3-1 and the response data structures and response codes specified in table 5.12.1.2.3.3-2.

Table 5.12.1.2.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AcsConfigurationData	M	1	Parameters to create an individual ACS Configuration subscription resource.

Table 5.12.1.2.3.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AcsConfiguration Data	M	1	201 Created	The subscription resource was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.12.1.2.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-acsp/v1/{afId}/subscriptions/{subscriptionId}

5.12.1.3 Resource: Individual ACS Configuration Subscription

5.12.1.3.1 Introduction

This resource allows a AF to read, update or delete an existing ACS Configuration subscription.

5.12.1.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-acsp/v1/{afId}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.9.1.3.2-1.

Table 5.12.1.3.2-1: Resource URI variables for this resource

Name	Definition
apiRoot	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	Identifier of the AF of type string.
subscriptionId	Identifier of the subscription resource of type string.

5.12.1.3.3 Resource Methods

5.12.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.12.1.3.3.

5.12.1.3.3.2 GET

The GET method allows to read the active subscription for a given AF and subscription Id. The AF shall initiate the HTTP GET request message and theNEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.12.1.3.3.2-1.

Table 5.12.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.12.1.3.3.2-2 and the response data structures and response codes specified in table 5.12.1.3.3.2-3.

Table 5.12.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.12.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AcsConfiguration Data	M	1	200 OK	The information for the subscription in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.12.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.12.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.12.1.3.3.3 PUT

The PUT method updates an existing resource to update a configuration. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.9.1.3.3.3-1 and the response data structures and response codes specified in table 5.9.1.3.3.3-2.

Table 5.12.1.3.3.3-1: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
AcsConfiguration Data	M	1	Modify an existing subscription.

Table 5.12.1.3.3.3-2: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AcsConfiguration Data	M	1	200 OK	The subscription resource was updated successfully and a representation of the updated resource is returned.
n/a			204 No Content	The subscription resource was updated successfully.

N/A			307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.12.1.3.3.3-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.12.1.3.3.3-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.12.1.3.3.3A PATCH

The PATCH method modifies an existing resource to update an existing ACS Configuration Subscription. The AF shall initiate the HTTP PATCH request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.9.1.3.3.3A-1 and the response data structures and response codes specified in table 5.9.1.3.3.3A-2.

Table 5.12.1.3.3.3A-1: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
AcsConfiguration DataPatch	M	1	Modify an existing subscription.

Table 5.12.1.3.3.3A-2: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AcsConfiguration Data	M	1	200 OK	The subscription resource was modified successfully and a representation of the updated resource is returned.
n/a			204 No Content	The subscription resource was modified successfully.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.12.1.3.3.3A-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.12.1.3.3.3A-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.12.1.3.3.4 DELETE

The DELETE method deletes an existing individual subscription for a given AF. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.12.1.3.3.4-1.

Table 5.12.1.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.12.1.3.3.4-2 and the response data structures and response codes specified in table 5.12.1.3.3.4-3.

Table 5.12.1.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.12.1.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The subscription resource was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.12.1.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.12.1.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.12.2 Data Model

5.12.2.1 General

This clause specifies the application data model supported by the ACSParameterProvision API.

Table 5.12.2.1-1 specifies the data types defined for the ACSParameterProvision API.

Table 5.12.2.1-1: ACSParameterProvision API specific Data Types

Data type	Clause defined	Description	Applicability
AcsConfigurationData	5.12.2.3.2	Represents an individual ACS Configuration subscription resource.	
AcsConfigurationDataPatch	5.12.2.3.3	Represents the parameters to request to modify an existing ACS Configuration subscription.	PatchUpdate

5.12.2.2 Reused data types

The data types reused by the ACSParameterProvision API from other specifications are listed in table 5.12.2.2-1.

Table 5.12.2.2-1: Re-used Data Types

Data type	Reference	Comments
AcsInfo	3GPP TS 29.571 [8]	Contains the information of ACS
ExternalGroupId	3GPP TS 29.122 [4]	External Group Identifier for a user group.
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
Link	3GPP TS 29.122 [4]	
MtcProviderInformation	3GPP TS 29.571 [8]	Indicates MTC provider information.
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.9.4-1.

5.12.2.3 Structured data types

5.12.2.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.12.2.3.2 Type: AcsConfigurationData

Table 5.12.2.3.2-1: Definition of type AcsConfigurationData

Attribute name	Data type	P	Cardinality	Description	Applicability
self	Link	C	0..1	Identifies the individual service parameter subscription resource URI. Shall be present by the NEF in HTTP responses that include an object of AcsConfigurationData Data type.	
gpsi	Gpsi	O	0..1	Identifies GPSI. (NOTE)	
exterGroupld	ExternalGroupld	O	0..1	Represents a group of users. (NOTE)	
acsInfo	AcsInfo	M	1	Contains the information of ACS.	
mtcProviderld	MtcProviderInfor mation	O	0..1	Indicates MTC provider information.	
suppFeat	SupportedFeatur es	M	1	Indicates the list of Supported features used as described in clause 5.12.3. This parameter shall be supplied by the NF service consumer in the POST request that requested the creation of an individual ACS configuration Subscription resource.	
NOTE: Only one of the "gpsi" or "exterGroupld" attribute shall be provided.					

5.12.2.3.3 Type: AcsConfigurationDataPatch

Table 5.12.2.3.3-1: Definition of type AcsConfigurationDataPatch

Attribute name	Data type	P	Cardinality	Description	Applicability
acsInfo	AcsInfo	O	0..1	Contains the information of ACS.	
mtcProviderld	MtcProviderInfor mation	O	0..1	Indicates MTC provider information.	

5.12.2.4 Simple data types and enumerations

5.12.2.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.12.2.4.2 Simple data types

The simple data types defined in table 5.12.2.4.2-1 shall be supported.

Table 5.12.2.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.12.3 Used Features

The table below defines the features applicable to the ACSParameterProvision API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.12.3-1: Features used by ACSParameterProvision API

Feature number	Feature Name	Description
1	PatchUpdate	Indicates the support of enhancements to the northbound interfaces (e.g. support the partial modification of an existing subscription resource).

5.12.4 Error handling

5.12.4.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.12.4.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the ACSParameterProvision API.

5.12.4.3 Application Errors

The application errors defined for ACSParameterProvision API are listed in table 5.12.4.3-1.

Table 5.12.4.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

5.13 MoLcsNotify API

5.13.1 Resources

There is no resource defined for this API.

5.13.2 Notifications

5.13.2.1 Introduction

Upon receipt of a UE location information update notification from the GMLC, the NEF shall send an HTTP POST message in order to notify the AF of the updated UE location information.

5.13.2.2 Event Notification

Callback URI: **{notificationDestination}** shall be used with the callback URI variables defined in table 5.13.2.2-1.

Table 5.13.2.2-1: Callback URI variables

Name	Definition
notificationDestination	A URI indicating the notification destination where N33 notification requests shall be delivered to. This URI shall be preconfigured in the NEF.

5.13.2.3 Operation Definition

5.13.2.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.13.2.3.1-1 and the response data structures and response codes specified in table 5.13.2.3.1-2.

Table 5.13.2.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
LocUpdateData	M	1	Delivers UE location to AF during MO-LR procedure

Table 5.13.2.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
LocUpdateDataReply	M	1	200 OK	The notification is received successfully.
N/A			307 Temporary Redirect	Temporary redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.13.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

Table 5.13.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

5.13.3 Data Model

5.13.3.1 General

This clause specifies the application data model supported by the MoLcsNotify API.

5.13.3.2 Reused data types

The data types reused by the MoLcsNotify API from other specifications are listed in table 5.13.3.2-1.

Table 5.13.3.2-1: Re-used Data Types

Data type	Reference	Comments
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.13.4-1.
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
LocationInfo	3GPP TS 29.122 [4]	Represent user location information for exposure.
LcsQosClass	3GPP TS 29.572 [34]	LCS QoS Class.
ServiceIdentity	3GPP TS 29.515 [35]	Service identity

5.13.3.3 Structured data types

5.13.3.3.1 Introduction

This clause defines the structured data types to be used by the MoLcsNotify API.

5.13.3.3.2 Type: LocUpdateData

This type represents a UE updated location information from the NEF to the AF.

Table 5.13.3.3.2-1: Definition of type LocUpdateData

Attribute name	Data type	P	Cardinality	Description	Applicability
gpsi	Gpsi	M	1	Generic Public Subscription identifier	
locInfo	LocationInfo	M	1	Represent user location information for exposure.	
lcsQosClass	LcsQosClass	M	1	LCS QoS Class.	
svclId	ServiceIdentity	O	0..1	Service Identity may be specified by the UE for LCS request.	
suppFeat	SupportedFeatures	M	1	Indicates the list of Supported features used as described in clause 5.13.4.	

5.13.3.3.3 Type: LocUpdateDataReply

This data type represents a reply to a MO LCS notification and is sent from the AF to the NEF.

Table 5.13.3.3.3-1: Definition of type LocUpdateDataReply

Attribute name	Data type	P	Cardinality	Description	Applicability
suppFeat	SupportedFeatures	M	1	Indicates the list of Supported features used as described in clause 5.13.4.	

5.13.3.4 Simple data types and enumerations

5.13.3.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.13.3.4.2 Simple data types

The simple data types defined in table 5.13.3.4.2-1 shall be supported.

Table 5.13.3.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.13.4 Used Features

The table below defines the features applicable to the MoLcsNotify API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.13.4-1: Features used by MoLcsNotify API

Feature number	Feature Name	Description

5.13.5 Error handling

5.13.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.13.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MoLcsNotify API.

5.13.5.3 Application Errors

The application errors defined for MoLcsNotify API are listed in table 5.13.5.3-1.

Table 5.13.5.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

5.14 AKMA API

5.14.1 Introduction

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-akma/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-akma" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

5.14.2 Resources

There are no resources defined for this API in this release of the specification.

5.14.3 Custom Operations without associated resources

5.14.3.1 Overview

The structure of the custom operation URIs of the AKMA API is shown in Figure 5.14.3.1-1.

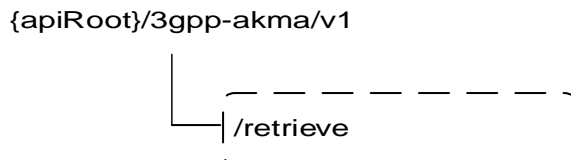


Figure 5.14.3.1-1: Custom operation URI structure of the AKMA API

Table 5.14.3.1-1 provides an overview of the custom operations and applicable HTTP methods.

Table 5.14.3.1-1: Custom operations without associated resources

Operation name	Custom operation URI	Mapped HTTP method	Description
Retrieve	/retrieve	POST	Request to retrieve AKMA Application Key information

5.14.3.2 Operation: Retrieve

5.14.3.2.1 Description

The custom operation allows a service consumer to retrieve AKMA application key information via the NEF.

5.14.3.2.2 Operation Definition

This operation shall support the request and response data structures and response codes specified in tables 5.14.3.2.2-1 and 5.14.3.2.2-2.

Table 5.14.3.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AkmaAfKeyRequest	M	1	Parameters to request to retrieve AKMA Application Key information.

Table 5.14.3.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AkmaAfKeyData	M	1	200 OK	The requested AKMA Application Key information was returned successfully.
n/a			204 No Content	If the requested data does not exist, the NEF shall respond with "204 No Content".
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
ProblemDetails	O	0..1	403 Forbidden	(NOTE 2)

NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

NOTE 2: Failure cases are described in subclause 5.14.7.

Table 5.14.3.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.14.3.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.14.4 Notifications

Notifications are not applicable to this API.

5.14.5 Data Model

5.14.5.1 General

This clause specifies the application data model supported by the AKMA API.

5.14.5.2 Reused data types

The data types reused by the AKMA API from other specifications are listed in table 5.14.5.2-1.

Table 5.14.5.2-1: Re-used Data Types

Data type	Reference	Comments
DateTime	3GPP TS 29.122 [4]	
Gpsi	3GPP TS 29.571 [8]	
Supi	3GPP TS 29.571 [8]	
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features.

5.14.5.3 Structured data types

5.14.5.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.14.5.3.2 Type: AkmaAfKeyRequest

Table 5.14.5.3.2-1: Definition of type AkmaAfKeyRequest

Attribute name	Data type	P	Cardinality	Description	Applicability (NOTE)
afId	AfId	M	1	Identification of AF	
aKId	AKId	M	1	A-KID	
anonInd	boolean	O	0..1	Indicates whether an anonymous user access. Set to "true" if an anonymous user access is requested; otherwise set to "false". Default value is "false" if omitted.	
suppFeat	SupportedFeatures	O	0..1	Indicates the list of Supported features used as described in clause 5.14.6.	

NOTE: Properties marked with a feature as defined in clause 5.14.6 are applicable as described in clause 5.2.7 of 3GPP TS 29.122 [4]. If no feature is indicated, the related property applies for all the features.

5.14.5.3.3 Type: AkmaAfKeyData

Table 5.14.5.3.3-1: Definition of type AkmaAfKeyData

Attribute name	Data type	P	Cardinality	Description	Applicability (NOTE)
kaf	string	M	1	K _{AF}	
expiry	DateTime	M	1	Expiration time of K _{AF} .	
gpsi	Gpsi	O	0..1	Indicates an external ID of the UE. (NOTE 2, NOTE x)	
supi	Supi	C	0..1	Indicates the SUPI of the UE. (NOTE 2)	
suppFeat	SupportedFeatures	O	0..1	Indicates the features supported by both the AF and the NEF.	

NOTE 1: Properties marked with a feature as defined in clause 5.14.6 are applicable as described in clause 5.2.7 of 3GPP TS 29.122 [4]. If no feature is indicated, the related property applies for all the features.

NOTE 2: When the "AkmaAfKeyData" data structure is used in the current release of this specification, the "gpsi" attribute may be included and the "supi" attribute is not applicable.

NOTE 3: When the "anonInd" attribute contained in AkmaAfKeyRequest data type is set to "true" in the incoming request, the "gpsi" attribute shall not be included.

5.14.5.4 Simple data types and enumerations

5.14.5.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.14.5.4.2 Simple data types

The simple data types defined in table 5.14.5.4.2-1 shall be supported.

Table 5.14.5.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability
AfId	string	Identification of AF which is formatted as the following string: "<FQDN>.<Ua* security protocol id>", wherein, <FQDN> is the FQDN of the AF and <Ua* security protocol id> is a string of 5 octet and the identification of the Ua* security protocol is specified as Ua security protocol identifier in Annex H of 3GPP TS 33.220 [39] that the AF will use with the UE. Example: 1. FQDN: www.app1.com , Ua* security protocol id: 0100BC0001, then AfId: www.app1.com.0100BC0001	
AKId	string	AKMA Key Identifier shall be in NAI format as specified in clause 2.2 of IETF RFC 7542 [40], which is formatted as the following string: "<username>@<realm>", wherein, <username> shall include Routing Indicator and the A-TID in the format "rid<value>.atid<value>", where "rid" and "atid" are labels indicating Routing Indicator and A-TID and <realm> shall include Home Network Id. Example: 1. If Routing Indicator: 012, A-TID: 019345346 and Home Network Id: 5gc.mnc012.mcc345.3gppnetwork.org, then AKId: rid012.akid019345346@5gc.mnc012.mcc345.3gppnetwork.org Routing Indicator, Home Network Id are specified in 3GPP TS 23.003 [55]. A-TID is specified in 3GPP TS 33.535 [38].	

5.14.6 Used Features

The table below defines the features applicable to the AKMA API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.14.6-1: Features used by AKMA API

Feature number	Feature Name	Description

5.14.7 Error handling

5.14.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.14.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the AKMA API.

5.14.7.3 Application Errors

The application errors defined for the AKMA API are listed in table 5.14.7.3-1.

Table 5.14.7.3-1: Application errors

Application Error	HTTP status code	Description
K_AKMA_NOT_PRESENT	403 Forbidden	Indicates that the K _{AKMA} identified by the A-KID provided in the AKMA Application Key retrieval request body is not present at the AAnF.

5.15 TimeSyncExposure API

5.15.1 Resources

5.15.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-time-sync/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-time-sync" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.15.1.1-1 and the resources and HTTP methods used for the TimeSyncExposure API.

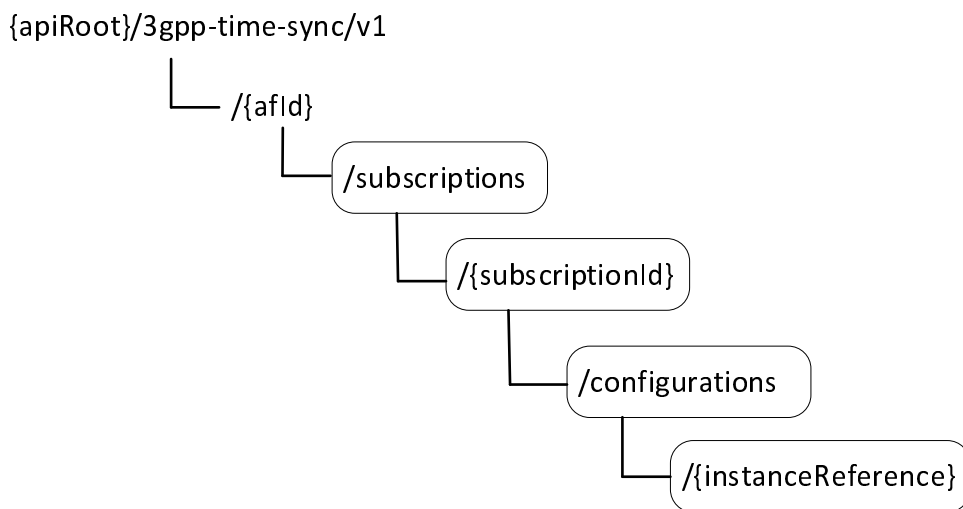


Figure 5.15.1.1-1: Resource URI structure of the TimeSyncExposure API

Table 5.15.1.1-1 provides an overview of the resources and HTTP methods applicable for the TimeSyncExposure API.

Table 5.15.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
Time Synchronization Exposure Subscriptions	/{afld}/subscriptions	GET	Read all subscriptions for a given AF
		POST	Create a new subscription to time synchronization exposure
Individual Time Synchronization Exposure Subscription	/{afld}/subscriptions/{subscriptionId}	GET	Read a subscription to time synchronization exposure
		PUT	Modify all of the properties of an existing subscription to time synchronization exposure
		DELETE	Delete a subscription to time synchronization exposure
Time Synchronization Exposure Configurations	/{afld}/subscriptions/{subscriptionId}/configurations	GET	Read all configurations for a given AF and subscription
		POST	Create a new configuration to time synchronization exposure
Individual Time Synchronization Exposure Configuration	/{afld}/subscriptions/{subscriptionId}/configurations/{instanceReference}	GET	Read a configuration to time synchronization exposure
		PUT	Modify all of the properties of an existing configuration to time synchronization exposure
		DELETE	Delete a configuration to time synchronization exposure
		DELETE	DELETE a new configuration of 5G access stratum time distribution.

5.15.1.2 Resource: Time Synchronization Exposure Subscriptions

5.15.1.2.1 Introduction

This resource allows an AF to read all active time synchronization exposure subscriptions for the given AF, or allows an AF to create a new Individual Time Synchronization Exposure Subscription in the NEF.

5.15.1.2.2 Resource Definition

Resource URI: {apiRoot}/3gpp-time-sync/v1/{afld}/subscriptions

This resource shall support the resource URI variables defined in table 5.15.1.2.2-1.

Table 5.15.1.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	string	Identifier of the AF.

5.15.1.2.3 Resource Methods

5.15.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.15.1.2.2.

5.15.1.2.3.2 GET

The GET method allows to read all active subscriptions for a given AF. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.15.1.2.3.2-1.

Table 5.15.1.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
supp-feat	SupportedFeatures	O	0..1	The features supported by the NF service consumer.

This method shall support the request data structures specified in table 5.15.1.2.3.2-2 and the response data structures and response codes specified in table 5.15.1.2.3.2-3.

Table 5.15.1.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.15.1.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(TimeSyncExposureSubsc)	M	0..N	200 OK	The subscription information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.15.1.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.15.1.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.15.1.2.3.3 POST

The POST method creates a new subscription resource to time synchronization exposure subscription for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.15.1.2.3.3-1 and the response data structures and response codes specified in table 5.15.1.2.3.3-2.

Table 5.15.1.2.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
TimeSyncExposureSubsc	M	1	Contains the information for the creation of a new Individual Time Synchronization Exposure Subscription resource.

Table 5.15.1.2.3.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
TimeSyncExposureSubsc	M	1	201 Created	The subscription was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.15.1.2.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-time-sync/v1/{afld}/subscriptions/{subscriptionId}

5.15.1.3 Resource: Individual Time Synchronization Exposure Subscription

5.15.1.3.1 Introduction

This resource allows an AF to read, update or delete an existing Individual Time Synchronization Exposure Subscription.

5.15.1.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-time-sync/v1/{afld}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.15.1.3.2-1.

Table 5.15.1.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	string	Identifier of the AF.
subscriptionId	string	Identifier of the subscription resource.

5.15.1.3.3 Resource Methods

5.15.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.15.1.3.2.

5.15.1.3.3.2 GET

The GET method allows to read the active subscription for a given AF and subscription Id. The AF shall initiate the HTTP GET request message and theNEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.15.1.3.3.2-1.

Table 5.15.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
supp-feat	SupportedFeatures	O	0..1	The features supported by the NF service consumer.

This method shall support the request data structures specified in table 5.15.1.3.3.2-2 and the response data structures and response codes specified in table 5.15.1.3.3.2-3.

Table 5.15.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.15.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
TimeSyncExposureSubsc	M	1	200 OK	The subscription information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.15.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.15.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.15.1.3.3.3 PUT

The PUT method modifies an existing subscription resource to update a subscription. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.15.1.3.3.3-1 and the response data structures and response codes specified in table 5.15.1.3.3.3-2.

Table 5.15.1.3.3.3-1: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
TimeSyncExposureSubsc	M	1	Modify an existing Time Synchronization Exposure Subscription.

Table 5.15.1.3.3.3-2: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
TimeSyncExposureSubsc	M	1	200 OK	The subscription was updated successfully.
N/A			204 No Content	The subscription was updated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.15.1.3.3.3-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.15.1.3.3.3-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.15.1.3.3.4 DELETE

The DELETE method deletes the time synchronization exposure subscription for a given AF. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.15.1.3.3.4-1.

Table 5.15.1.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.15.1.3.3.4-2 and the response data structures and response codes specified in table 5.15.1.3.3.4-3.

Table 5.15.1.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.15.1.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The subscription was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.15.1.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.15.1.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.15.1.4 Resource: Time Synchronization Exposure Configurations

5.15.1.4.1 Introduction

This resource allows an AF to read all active time synchronization exposure configuration for the given AF and subscription, or allows an AF to create a new time synchronization configuration and activate the time synchronization service with the configuration.

5.15.1.4.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-time-sync/v1/{afId}/subscriptions/{subscriptionId}/configurations**

This resource shall support the resource URI variables defined in table 5.15.1.4.2-1.

Table 5.15.1.4.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.
subscriptionId	string	Identifier of the subscription resource.

5.15.1.4.3 Resource Methods

5.15.1.4.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.15.1.4.3.

5.15.1.4.3.2 GET

The GET method allows to read all active configurations for a given AF and subscription. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.15.1.4.3.2-1.

Table 5.15.1.4.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.15.1.4.3.2-2 and the response data structures and response codes specified in table 5.15.1.4.3.2-3.

Table 5.15.1.4.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.15.1.4.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(TimeSyncExposureConfig)	M	0..N	200 OK	The configuration information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.15.1.4.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.15.1.4.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.15.1.4.3.3 POST

The POST method creates a new configuration resource to activate time synchronization service for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.15.1.4.3.3-1 and the response data structures and response codes specified in table 5.15.1.4.3.3-2.

Table 5.15.1.4.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
TimeSyncExposureConfig	M	1	Parameters to create a configuration and to activate time synchronization service.

Table 5.15.1.2.4.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
TimeSyncExposureConfig	M	1	201 Created	The subscription was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.15.1.4.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-time-sync/v1/{afId}/subscriptions/{subscriptionId}/configurations/{instanceReference}

5.15.1.5 Resource: Individual Time Synchronization Exposure Configuration

5.15.1.5.1 Introduction

This resource allows an AF to read/modify/cancel a configuration to active/modify/deactivate Time Synchronization service with the NEF.

5.15.1.5.2 Resource Definition

Resource URI: {apiRoot}/3gpp-time-sync/v1/{afId}/subscriptions/{subscriptionId}/configuration/{instanceReference}

This resource shall support the resource URI variables defined in table 5.15.1.5.2-1.

Table 5.15.1.5.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.
subscriptionId	string	Identifier of the subscription resource.
instanceReference	string	Identifier of the PTP instance resource

5.15.1.5.3 Resource Methods

5.15.1.5.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.15.1.5.2.

5.15.1.5.3.2 GET

The GET method allows to read the active configuration for a given AF, subscription Id and configuration Id. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.15.1.5.3.2-1.

Table 5.15.1.5.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.15.1.5.3.2-2 and the response data structures and response codes specified in table 5.15.1.5.3.2-3.

Table 5.15.1.5.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.15.1.5.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
TimeSyncExposureConfig	M	1	200 OK	The configuration information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.15.1.5.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.15.1.5.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.15.1.5.3.3 PUT

The PUT method modifies an existing configuration resource to update a configuration. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.15.1.5.3.3-1 and the response data structures and response codes specified in table 5.15.1.5.3.3-2.

Table 5.15.1.5.3.3-1: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
TimeSyncExposureConfig	M	1	Modify an existing Time Synchronization Exposure Configuration.

Table 5.15.1.5.3.3-2: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
TimeSyncExposureConfig	M	1	200 OK	The subscription was updated successfully.
N/A			204 No Content	The subscription was updated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.15.1.5.3.3-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.15.1.5.3.3-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.15.1.5.3.4 DELETE

The DELETE method deletes the time synchronization exposure subscription for a given AF. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.15.1.5.3.4-1.

Table 5.15.1.5.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.15.1.5.3.4-2 and the response data structures and response codes specified in table 5.15.1.5.3.4-3.

Table 5.15.1.5.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.15.1.5.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The configuration was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.15.1.5.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.15.1.5.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.15.2 Custom Operations without associated resources

None.

5.15.3 Notifications

5.15.3.1 Introduction

Table 5.15.3.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Time Synchronization Capability Notification	{subsNotifUri}	POST	Time Synchronization Capability Notification for a list of UEs.
Time Synchronization Configuration Notification	{configNotifUri}	POST	Current State of Time Synchronization configuration Notification.

5.15.3.2 Time Synchronization Capability Notification

5.15.3.2.1 Description

The Notification is used by the NEF to report the Time Synchronization Capability to the AF.

5.15.3.2.2 Callback URI

The Callback URI "{subsNotifUri}" shall be used with the callback URI variables defined in table 5.15.3.2.2-1.

Table 5.15.3.2.2-1: Callback URI variables

Name	Definition
subsNotifUri	Callback reference provided by the AF during creation/modification of the subscription as defined in Table 5.15.4.3.2-1.

5.15.3.2.3 Operation Definition

5.15.3.2.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.15.3.2.3.1-1 and the response data structures and response codes specified in table 5.15.3.2.3.1-2 and the Location Headers specified in table 5.15.3.2.3.1-3 and table 5.15.3.2.3.1-4.

Table 5.15.3.2.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
TimeSyncExposureSubsNotif	M	1	Provides the time synchronization capabilities of a list of UEs by the NEF to the AF.

Table 5.15.3.2.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The event notification is received successfully.
N/A			307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.15.3.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

Table 5.15.3.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

5.15.3.2.3.2 Notification via Websocket

If supported by both AF and NEF and successfully negotiated, the Time Synchronization Capability Notification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4 of 3GPP TS 29.122 [4].

5.15.3.3 Time Synchronization Configuration Notification

5.15.3.3.1 Description

The Notification is used by the NEF to report the state of Time Synchronization service configuration to the AF.

5.15.3.3.2 Callback URI

The Callback URI "{configNotifUri}" shall be used with the callback URI variables defined in table 5.15.3.3.2-1.

Table 5.15.3.3.2-1: Callback URI variables

Name	Definition
configNotifUri	Callback reference provided by the AF during creation/modification of the configuration as defined in Table 5.15.4.3.6-1.

5.15.3.3.3 Operation Definition

5.15.3.3.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.15.3.3.3.1-1 and the response data structures and response codes specified in table 5.15.3.3.3.1-2 and the Location Headers specified in table 5.15.3.3.3.1-3 and table 5.15.3.3.3.1-4.

Table 5.15.3.3.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
TimeSyncExposureConfigNotif	M	1	Provides the current state of time synchronization service configuration by the NEF to the AF.

Table 5.15.3.3.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The notification is received successfully.
N/A			307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.15.3.3.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

Table 5.15.2.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

5.15.3.3.3.2 Notification via Websocket

If supported by both AF and NEF and successfully negotiated, the state of Time Synchroniaition Service Configuration Notification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4 of 3GPP TS 29.122 [4].

5.15.4 Data Model

5.15.4.1 General

This clause specifies the application data model supported by the TimeSyncExposure API.

Table 5.15.4.1-1 specifies the data types defined for the TimeSyncExposure API.

Table 5.15.4.1-1: TimeSyncExposure API specific Data Types

Data type	Clause defined	Description	Applicability
AsTimeResource	5.15.4.4.8	Identifies the supported 5G clock quality.	
ConfigForPort	5.15.4.3.18	Contains configuration information for each port.	
EventFilter	5.15.4.3.10	Contains the filter conditions to match for notifying the event(s) of time synchronization capabilities.	
GmCapable	5.15.4.4.5	Identifies the supported grandmaster.	
InstanceType	5.15.4.4.7	Identifies supported PTP instance type.	
Protocol	5.15.4.4.4	Identifies the supported protocol.	
PtpCapabilitiesPerUe	5.15.4.3.11	Contains the supported PTP capabilities per UE.	
PtpInstance	5.15.4.3.12	Contains PTP instance configuration and activation information requested by the AF.	
StageOfConfiguration	5.15.4.3.17	Contains the PTP port state of the time synchronization configuration.	
StateOfDstt	5.15.4.3.19	Contains the PTP port state of a DS-TT	
SubscribedEvent	5.15.4.4.6	Identifies the supported event.	
SubsEventNotification	5.15.4.3.8	Represents the notification about a subscribed Individual Event.	
TimeSyncCapability	5.15.4.3.3	Contains the time synchronization capability.	
TimeSyncExposureConfig	5.15.4.3.6	Contains the Time Synchronization Configuration parameters.	
TimeSyncExposureConfigNotif	5.15.4.3.9	Contains the notification of time synchronization service state.	
TimeSyncExposureSubsc	5.15.4.3.2	Contains the requested parameters for the subscription to time synchronization capability notifications.	
TimeSyncExposureSubsNotif	5.15.4.3.7	Contains the notification of time synchronization capability.	

5.15.4.2 Reused data types

The data types reused by the TimeSyncExposure API from other specifications are listed in table 5.15.4.2-1.

Table 5.15.4.2-1: Re-used Data Types

Data type	Reference	Comments
DateTime	3GPP TS 29.571 [8]	
Dnn	3GPP TS 29.571 [8]	Identifies a DNN.
ExternalGroupId	3GPP TS 29.122 [4]	External Group Identifier for a user group.
NotificationMethod	3GPP TS 29.508 [26]	
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
Snssai	3GPP TS 29.571 [8]	Identifies the S-NSSAI.
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.15.5-1.
UInteger	3GPP TS 29.571 [8]	Unsigned integer.
Uri	3GPP TS 29.571 [8]	Identifies a referenced resource.

5.15.4.3 Structured data types

5.15.4.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.15.4.3.2 Type: TimeSyncExposureSubsc

Table 5.15.4.3.2-1: Definition of type TimeSyncExposureSubsc

Attribute name	Data type	P	Cardinality	Description	Applicability
exterGroupId	ExternalGroupId	C	0..1	Identifies a group of UE(s) for which the time synchronization capabilities is requested. (NOTE 1)	
gpsis	array(Gpsi)	C	1..N	Contains a list of UE for which the time synchronization capabilities is requested. (NOTE 1)	
anyUeInd	boolean	C	0..1	Identifies whether the AF request applies to any UE (i.e. all UEs). This attribute shall set to "true" if applicable for any UE, otherwise, set to "false". (NOTE 1) (NOTE 2)	
notifMethod	NotificationMethod	O	0..1	If "notifMethod" is not supplied, the default value "ON_EVENT_DETECTION" applies.	
dnn	Dnn	C	0..1	Identifies a DNN, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only. (NOTE 2)	
snssai	Snssai	C	0..1	Identifies an S-NSSAI. (NOTE 2)	
afServiceId	string	O	0..1	Identifies a service on behalf of which the AF is issuing the request.	
subscribedEvents	array(SubscribedEvents)	O	1..N	Identifies the requirement to be notified of the event(s).	
eventFilters	array(EventFilter)	O	1..N	Contains the filter conditions to match for notifying the event(s) of time synchronization capabilities for a list of UE(s).	
subsNotifUri	Uri	M	1	Notification URI for time sensitive capability reporting.	
subsNotifId	string	M	1	Notification Correlation ID assigned by the NF service consumer.	
maxReportNbr	UInteger	O	0..1	If omitted, there is no limit.	
expiry	DateTime	C	0..1	This attribute indicates the expiry time of the subscription, after which the NEF shall not send any event notifications and the subscription becomes invalid. It may be included in an event subscription request and may be included in an event subscription response based on operator policies. If an expiry time was included in the request, then the expiry time returned in the response should be less than or equal to that value. If the expiry time is not included in the response, the NF service consumer shall not associate an expiry time for the subscription.	
repPeriod	DurationSec	C	0..1	Is supplied for notification Method "periodic".	

requestTestNotification	boolean	O	0..1	Set to true by the AF to request the NEF to send a test notification as defined in clause 5.2.5.3 of 3GPP TS 29.122 [4]. Set to false or omitted otherwise.	Notification_test_event
websocketNotificationConfig	WebsocketNotificationConfig	O	0..1	Configuration parameters to set up notification delivery over Websocket protocol.	Notification_websocket
supportedFeatures	SupportedFeatures	C	0..1	Represents the features supported by the NF service consumer. This parameter shall be supplied by the NF service consumer in the POST request and the response that requested the creation of an Individual Time Synchronization Subscription resource.	

NOTE 1: Only one of the properties "gpsis", "anyUeInd" or "extergroupId" shall be included.
NOTE 2: The properties of "anyUeInd" may be included only when the properties of "dnn" and "snssai" are included.

5.15.4.3.3 Type: TimeSyncCapability

Table 5.15.4.3.3-1: Definition of type TimeSyncCapability

Attribute name	Data type	P	Cardinality	Description	Applicability
upNodeid	Uint64	M	1	Identifies the applicable NW-TT. Contains a TSC user plane node Id. If integrated with TSN, the user plane node Id is a bridge Id defined in IEEE 802.1Q [51] clause 14.2.5.	
gmCapables	array(GmCapable)	C	1..N	Indicates whether user plane node supports acting as a gPTP and/or PTP grandmaster. (NOTE)	
asTimeRes	AsTimeResource	C	0..1	Indicates the supported 5G clock quality (i.e. the source of time used by the 5GS). (NOTE)	
ptpCapForUes	map(PtpCapabilitiesPerUe)	C	1..N	Contains the PTP capabilities supported by the list of UE(s). The key of the map is the gpsi. Shall be present if the "gmCapables" attribute is included.	

NOTE: At least one of the "gmCapables" attribute and "asTimeRes" attribute shall be included.

5.15.4.3.4 Void

5.15.4.3.5 Void

5.15.4.3.6 Type: TimeSyncExposureConfig

Table 5.15.4.3.6-1: Definition of type TimeSyncExposureConfig

Attribute name	Data type	P	Cardinality	Description	Applicability
upNodeId	Uint64	M	1	Identifies the applicable NW-TT. Contains a TSC user plane node Id. If integrated with TSN, the user plane node Id is a bridge Id defined in IEEE 802.1Q [41] clause 14.2.5.	
reqPtPIns	PtPInstance	M	1	Identifies the PtP instance configuration and activation requested by the AF.	
gmEnable	boolean	C	0..1	Indicates that the AF requests 5GS to act as a grandmaster for PTP or gPTP if it is included and set to true. The default value "false" shall apply, if the attribute is not present.	
gmPrio	UInteger	C	0..1	Indicates a priority used as defaultDS.priority1 when generating Announce message when 5GS acts as (g)PTP GM. It may be present if the "gmEnable" is set to true.	
timeDom	UInteger	M	1	Indicate the (g)PTP domain that the (TSN)AF is located in.	
timeSyncErrBdg t	UInteger	O	0..1	Indicates the time synchronization budget for the time synchronization service in units of nanoseconds. Minimum = 1.	
tempValidity	TemporalValidity	O	0..1	Indicates the time period when the time synchronization service for a PTP instance is active.	
configNotifUri	Uri	M	1	Notification URI for configuration state reporting.	
configNotifId	string	M	1	Notification Correlation ID assigned by the NF service consumer.	

5.15.4.3.7 Type: TimeSyncExposureSubsNotif

Table 5.15.4.3.7-1: Definition of type TimeSyncExposureSubsNotif

Attribute name	Data type	P	Cardinality	Description	Applicability
subsNotifId	string	M	1	Notification Correlation ID assigned by the NF service consumer.	
eventNotifs	array(SubsEventNotification)	M	1..N	Notifications about subscribed Individual Events	

5.15.4.3.8 Type SubsEventNotification

Table 5.15.4.3.8-1: Definition of type SubsEventNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
event	SubscribedEvent	M	1	Subscribed events.	
timeSyncCapas	array(TimeSyncCapability)	O	1..N	Contains a list of time synchronization capabilities for the UE(s).	

5.15.4.3.9 Type: TimeSyncExposureConfigNotif

Table 5.15.4.3.9-1: Definition of type TimeSyncExposureConfigNotif

Attribute name	Data type	P	Cardinality	Description	Applicability
configNotifId	string	M	1	Notification Correlation ID assigned by the NF service consumer.	
stateOfConfig	StateOfConfiguration	M	1	Indicates the current state of time synchronization service configuration	

5.15.4.3.10 Type: EventFilter

Table 5.15.4.3.10-1: Definition of type EventFilter

Attribute name	Data type	P	Cardinality	Description	Applicability
instanceTypes	array(InstanceType)	O	1..N	Indicates the PTP instance type(s).	
transProtocols	array(Protocol)	O	1..N	Indicates the transport protocol type(s).	
ptpProfiles	array(string)	O	1..N	Identifies the supported PTP profiles.	

5.15.4.3.11 Type: PtpCapabilitiesPerUe

Table 5.15.4.3.11-1: Definition of type PtpCapabilitiesPerUe

Attribute name	Data type	P	Cardinality	Description	Applicability
gpsi	Gpsi	M	1	Identifies the UE to which the reported PTP instance below apply.	
ptpCaps	array(EventFilter)	M	1..N	Contains the reported PTP capabilities for the UE.	

5.15.4.3.12 Type: PtpInstance

Table 5.15.4.3.12-1: Definition of type PtpInstance

Attribute name	Data type	P	Cardinality	Description	Applicability
instanceType	InstanceType	M	1	Indicates the PTP instance type.	
protocol	Protocol	M	1	Indicates the protocol type.	
ptpProfile	string	M	1	Identifies the PTP profile.	
portConfigs	array(ConfigForPort)	O	1..N	Contains the configurations for the PTP port(s) in the PTP instance.	

- 5.15.4.3.13 Void
- 5.15.4.3.14 Void
- 5.15.4.3.15 Void
- 5.15.4.3.16 Void
- 5.15.4.3.17 Type: StateOfConfiguration

Table 5.15.4.3.17-1: Definition of type StateOfConfiguration

Attribute name	Data type	P	Cardinality	Description	Applicability
stateOfNwtt	boolean	O	0..1	When the PTP port state is Leader, Follower or Passive, it is included and set to true to indicate the state of configuration for NW-TT port is active; when PTP port state is in any other case, it is included and set to false to indicate the state of configuration for NW-TT port is inactive. Default value is false. (NOTE)	
stateOfDsts	array(StateOfDstt)	O	1..N	Contains the PTP port states of the DS-TT(s).	
NOTE: Leader and Follower terms in this specification are aligned with NOTE 2 in clause 5.27.1.2.2.1 of 3GPP TS 23.501 [3].					

5.15.4.3.18 Type: ConfigForPort

Table 5.15.4.3.18-1: Definition of type ConfigForPort

Attribute name	Data type	P	Cardinality	Description	Applicability
gpsi	Gpsi	C	0..1	Identifies the UE/DS-TT which the parameters below apply.	
n6Ind	boolean	C	0..1	Indicates whether the N6 termination which the parameters below apply. <ul style="list-style-type: none"> - "true" indicates that the N6 termination which the parameters below apply. - "false" indicates that the N6 termination which the parameters below do not apply. - Default value is "false" if omitted. 	
ptpEnable	boolean	O	0..1	This is used to indicate whether to set the portDS.portEnable. <ul style="list-style-type: none"> - "true" indicates to set the portDS.portEnable. - "false" indicates not to set the portDS.portEnable. - Default value is "false" if omitted, the default value as described in the PTP Profile is used. 	
logSyncInter	integer	O	0..1	Specifies the mean time interval between successive Sync messages. This is applicable for IEEE Std 1588 [45] Boundary Clock or IEEE Std 802.1AS [46] operation. If omitted, the default value as described in the PTP Profile is used.	
logSyncInterInd	boolean	O	0..1	When set to FALSE, the value of "logSyncInter" attribute is used to set the initialLogSyncInterval as described in IEEE Std 802.1AS [46]. When set to TRUE, the value of "logSyncInter" attribute is used to set the mgtSettableLogSyncInterval as described in IEEE Std 802.1AS [46]. If omitted, the default value as described in the IEEE Std 802.1AS [46] is used.	
logAnnouInter	integer	O	0..1	Specifies the mean time interval between successive Announce messages. This is applicable for IEEE Std 1588 [45] Boundary Clock or IEEE Std 802.1AS [46] operation. If omitted, the default value as described in the PTP Profile is used.	

logAnnouInterIn d	boolean	O	0..1	When set to FALSE, the value of "logAnnouInter" attribute is used to set the initialLogAnnouInterval as described in IEEE 802.1AS [46]. When set to TRUE, the value of "logAnnouInter" attribute is used to set the mgtSettableLogAnnouInterval as described in IEEE Std 802.1AS [46]. If omitted, the default value as described in the IEEE Std 802.1AS [46] is used.	
NOTE: Either "gpsi" or "n6Ind" attribute shall be included.					

5.15.4.3.19 Type: StateOfDstt

Table 5.15.4.3.19-1: Definition of type StateOfDstt

Attribute name	Data type	P	Cardinality	Description	Applicability
gpsi	Gpsi	M	1	Identifies the UE/DS-TT which the parameters below apply.	
state	boolean	M	1	When the PTP port state is Leader, Follower or Passive, it is included and set to true to indicate the state of configuration for DS-TT port is active; when PTP port state is in any other case, it is included and set to false to indicate the state of configuration for DS-TT port is inactive. Default value is false.	
NOTE: Leader and Follower terms in this specification are aligned with NOTE 2 in clause 5.27.1.2.2.1 of TS 23.501 [3].					

5.15.4.4 Simple data types and enumerations

5.15.4.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.15.4.4.2 Simple data types

The simple data types defined in table 5.15.4.4.2-1 shall be supported.

Table 5.15.4.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.15.4.4.3 Void

5.15.4.4.4 Enumeration: Protocol

Table 5.15.4.4.4-1: Enumeration Protocol

Enumeration value	Description	Applicability
ETH	Indicates Ethernet as defined in IEEE Std 1588 [45] Annex E is supported.	
IPV4	Indicates IPv4 as defined in IEEE Std 1588 [45] Annex C is supported.	
IPV6	Indicates IPv6 as defined in IEEE Std 1588 [45] Annex D is supported.	

5.15.4.4.5 Enumeration: GmCapable

Table 5.15.4.4.5-1: Enumeration GmCapable

Enumeration value	Description	Applicability
GPTP	gPTP grandmaster is supported.	
PTP	PTP grandmaste is supported.	

5.15.4.4.6 Enumeration: SubscribedEvent

Table 5.15.4.4.6-1: Enumeration SubscribedEvent

Enumeration value	Description
AVAILABILITY_FOR_TIME_SYNC_SERVICE	The AF requests to be notified when the UE is availability for time synchronization service.

5.15.4.4.7 Enumeration: InstanceType

Table 5.15.4.4.7-1: Enumeration InstanceType

Enumeration value	Description	Applicability
BOUNDARY_CLOCK	Indicates Boundary Clock as defined in IEEE Std 1588 [45].	
E2E_TRANS_CLOCK	Indicates End-to-End Transparent Clock as defined in IEEE Std 1588 [45].	
P2P_TRANS_CLOCK	Indicates Peer-to-Peer Transparent Clock as defined in IEEE Std 1588 [45].	
P2P_RELAY_INSTANCE	Indicates PTP Relay instance as defined in IEEE Std 802.1AS [46]	

5.15.4.4.8 Enumeration: AsTimeResource

The enumeration AsTimeResource represents the supported 5G clock quality (i.e. the source of time used by the 5GS). It shall comply with the provisions defined in table 5.15.4.4.8-1.

Table 5.15.4.4.8-1: Enumeration AsTimeResource

Enumeration value	Description	Applicability
ATOMIC_CLOCK	Indicates atomic clock is supported.	
GNSS	Indicates Global Navigation Satellite System is supported.	
TERRESTRIAL_RADIO	Indicates terrestrial radio is supported.	
SERIAL_TIME_CODE	Indicates serial time code is supported.	
PTP	Indicates PTP is supported.	
NTP	Indicates NTP is supported.	
HAND_SET	Indicates hand set is supported.	
INTERNAL_OSCILLATOR	Indicates internal oscillator is supported.	
OTHER	Indicates other source of time is supported.	

5.15.5 Used Features

The table below defines the features applicable to the TimeSyncExposure API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.15.5-1: Features used by TimeSyncExposure API

Feature number	Feature Name	Description
1	Notification_websocket	The delivery of notifications over Websocket is supported as defined in 3GPP TS 29.122 [4]. This feature requires that the Notification_test_event feature is also supported.
2	Notification_test_event	The testing of notification connection is supported as defined in 3GPP TS 29.122 [4].

5.15.6 Error handling

5.15.6.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.15.6.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the TimeSyncExposure API.

5.15.6.3 Application Errors

The application errors defined for the TimeSyncExposure API are listed in table 5.15.6.3-1.

Table 5.15.6.3-1: Application errors

Application Error	HTTP status code	Description

5.16 EcsAddressProvision API

5.16.1 Resources

5.16.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-ecs-address-provision/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-ecs-address-provision" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.16.1.1-1 and the resources and HTTP methods used for the EcsAddressProvision API.

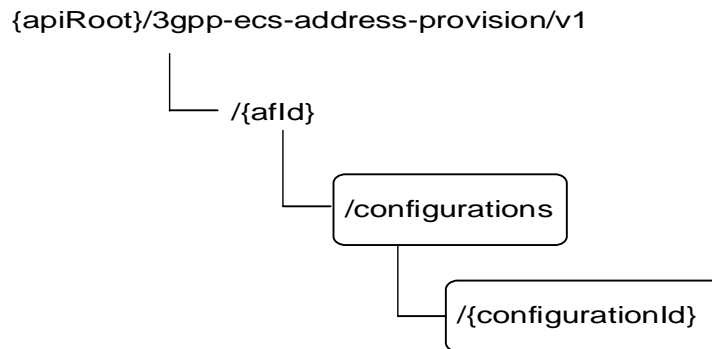


Figure 5.16.1.1-1: Resource URI structure of the EcsAddressProvision API

Table 5.16.1.1-1 provides an overview of the resources and HTTP methods applicable for the EcsAddressProvision API.

Table 5.16.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
ECS Address Provision Configurations	/{afId}/configurations	GET	Read all configurations for a given AF identified by {afId}
		POST	Create a new configuration to provision ECS address(es)
Individual ECS Address Provision Configuration	/{afId}/configurations/{configurationId}	GET	Read an existing configuration identified by {configurationId}
		PUT	Modify all of the properties of an existing configuration identified by {configurationId}
		DELETE	Delete a configuration identified by {configurationId}

5.16.1.2 Resource: ECS Address Provision Configurations

5.16.1.2.1 Introduction

This resource allows a AF to read all active ECS Address Provision Configurations for a given AF, or create an new Individual ECS Address Provision Configuration to the NEF.

5.16.1.2.2 Resource Definition

Resource URI: {apiRoot}/3gpp-ecs-address-provision/v1/{afId}/configurations

This resource shall support the resource URI variables defined in table 5.16.1.2.2-1.

Table 5.16.1.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.

5.16.1.2.3 Resource Methods

5.16.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.16.1.2.2.

5.16.1.2.3.2 GET

The GET method allows to read all active configurations for a given AF. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.16.1.2.3.2-1.

Table 5.16.1.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.16.1.2.3.2-2 and the response data structures and response codes specified in table 5.16.1.2.3.2-3.

Table 5.16.1.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.16.1.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(EcsAddress Provision)	M	0..N	200 OK	All the configurations for the AF are returned.
N/A			307 Temporary Redirect	Temporary redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.16.1.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.16.1.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.16.1.2.3.3 POST

The POST method creates a new resource to Individual ECS Address Provision Configuration for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.16.1.2.3.3-1 and the response data structures and response codes specified in table 5.16.1.2.3.3-2.

Table 5.16.1.2.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
EcsAddressProvision	M	1	Parameters to create a configuration to provision ECS address.

Table 5.16.1.2.3.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
EcsAddressProvision	M	1	201 Created	The configuration was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.16.1.2.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-ecs-address-provision/v1/{afId}/configurations/{configurationId}

5.16.1.3 Resource: Individual ECS Address Provision Configuration

5.16.1.3.1 Introduction

This resource allows a AF to read, update or delete an existing Individual ECS Address Provision Configuration.

5.16.1.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-ecs-address-provision/v1/{afId}/configurations/{configurationId}

This resource shall support the resource URI variables defined in table 5.16.1.3.2-1.

Table 5.16.1.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.
configurationId	string	Identifier of the configuration resource.

5.16.1.3.3 Resource Methods

5.16.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.16.1.3.2.

5.16.1.3.3.2 GET

The GET method allows to read the active configuration for a given AF and a given configuration Id. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.16.1.3.3.2-1.

Table 5.16.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.16.1.3.3.2-2 and the response data structures and response codes specified in table 5.16.1.3.3.2-3.

Table 5.16.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.16.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
EcsAddressProvision	M	1	200 OK	The information for the configuration in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.16.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.16.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.16.1.3.3.3 PUT

The PUT method is used to replace an existing Individual ECS Address Provision Configuration. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.16.1.3.3.3-1 and the response data structures and response codes specified in table 5.16.1.3.3.3-2.

Table 5.16.1.3.3.3-1: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
EcsAddressProvision	M	1	Replace an existing Individual ECS Address Provision Configuration.

Table 5.16.1.3.3.3-2: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
EcsAddressProvision	M	1	200 OK	The configuration was updated successfully.
N/A			204 No Content	The configuration was updated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during configuration modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during configuration modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.16.1.3.3.3-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.16.1.3.3.3-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.16.1.3.3.4 DELETE

The DELETE method deletes an existing Individual ECS Address Provision Configuration. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.7.1.3.3.4-1.

Table 5.7.1.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.7.1.3.3.4-2 and the response data structures and response codes specified in table 5.7.1.3.3.4-3.

Table 5.7.1.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.7.1.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The configuration was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during configuration termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during configuration termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.7.1.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.7.1.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.16.1A Notifications

Notifications are not applicable to this API.

5.16.2 Data Model

5.16.2.1 General

This clause specifies the application data model supported by the EcsAddressProvision API.

Table 5.16.2.1-1 specifies the data types defined for the EcsAddressProvision API.

Table 5.16.2.1-1: EcsAddressProvision API specific Data Types

Data type	Clause defined	Description	Applicability
EcsAddressProvision	5.16.2.3.2	Represents ECS address provision configuration information.	

5.16.2.2 Reused data types

The data types reused by the EcsAddressProvision API from other specifications are listed in table 5.16.2.2-1.

Table 5.16.2.2-1: Re-used Data Types

Data type	Reference	Comments
EcsServerAddr	3GPP TS 29.571 [8]	
Link	3GPP TS 29.122 [4]	Identifies a referenced resource.
SpatialValidityCond	3GPP TS 29.571 [8]	
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.16.3-1.

5.16.2.3 Structured data types

5.16.2.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.16.2.3.2 Type: EcsAddressProvision

Table 5.16.2.3.2-1: Definition of type EcsAddressProvision

Attribute name	Data type	P	Cardinality	Description	Applicability
self	Link	C	0..1	Identifies the individual configuration resource. Shall be present in the HTTP GET response when reading all the configurations for an AF.	
ecsServerAddr	EcsServerAddr	M	1	Represents the ECS address(es).	
spatialValidityCond	SpatialValidityCond	O	0..1	Spatial validity condition.	
tgtUe	TargetUeId	O	0..1	Target UE information.	
suppFeat	SupportedFeatures	M	1	Indicates the negotiated supported features.	

5.16.2.4 Simple data types and enumerations

5.16.2.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.16.2.4.2 Simple data types

The simple data types defined in table 5.16.2.4.2-1 shall be supported.

Table 5.16.2.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.16.3 Used Features

The table below defines the features applicable to the EcsAddressProvision API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.16.3-1: Features used by EcsAddressProvision API

Feature number	Feature Name	Description

5.16.4 Error handling

5.16.4.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.16.4.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the EcsAddressProvision API.

5.16.4.3 Application Errors

The application errors defined for EcsAddressProvision API are listed in table 5.16.4.3-1.

Table 5.16.4.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

5.17 AMPolicyAuthorization API

5.17.1 Resources

5.17.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-am-policyauthorization/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-am-policyauthorization" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.17.1.1-1 and the resources and HTTP methods used for the AMPolicyAuthorization API.

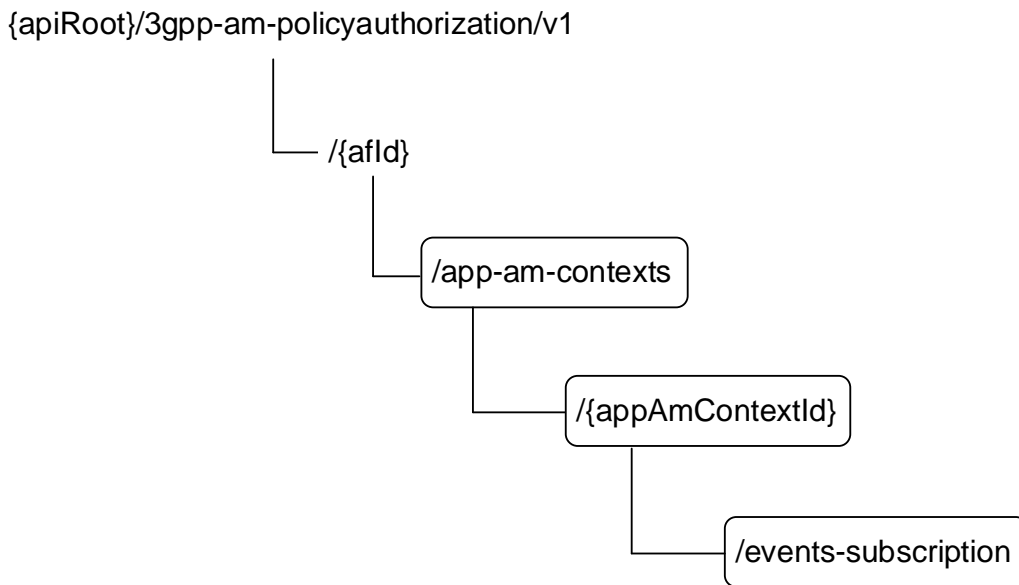


Figure 5.17.1.1-1: Resource URI structure of the AMPolicyAuthorization API

Table 5.17.1.1-1 provides an overview of the resources and HTTP methods applicable for the AMPolicyAuthorization API.

Table 5.17.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
Application AM Contexts	<code>/{afld}/app-am-contexts</code>	POST	Create a new Individual application AM context resource and may create the child AM Policy Events Subscription sub-resource.
Individual application AM Context	<code>/{afld}/app-am-contexts/{appAmContextId}</code>	GET	Reads an existing Individual application AM context resource.
		PATCH	Updates an existing Individual application AM context resource. It can also create or update an AM Policy Events Subscription sub-resource.
		DELETE	Deletes an existing Individual application AM context resource and the child AM Policy Events Subscription sub-resource.
AM Policy Events Subscription	<code>/{afld}/app-am-contexts/{appAmContextId}/events-subscription</code>	PUT	Creates a new AM Policy Events Subscription sub-resource or modifies an existing AM Policy Events Subscription sub-resource.
		DELETE	Deletes an AM Policy Events Subscription sub-resource.

5.17.1.2 Resource: Application AM Contexts

5.17.1.2.1 Introduction

This resource allows an AF to request the creation of a new Individual application AM context resource.

5.17.1.2.2 Resource Definition

Resource URI: `{apiRoot}/3gpp-am-policyauthorization/v1/{afId}/app-am-contexts`

This resource shall support the resource URI variables defined in table 5.17.1.2.2-1.

Table 5.17.1.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.

5.17.1.2.3 Resource Methods

5.17.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.17.1.2.2.

5.17.1.2.3.2 POST

The POST method creates a new resource to Individual application AM context for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.17.1.2.3.2-1 and shall support the response data structures and response codes specified in table 5.17.1.2.3.2-2.

Table 5.17.1.2.3.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AppAmContextExpData	M	1	Contains the exposure information for the creation of a new Individual application AM context resource.

Table 5.17.1.2.3.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AppAmContextExpRespData	M	1	201 Created	Successful case. The Individual application AM context resource was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
ProblemDetails	O	0..1	500 Internal Server Error	(NOTE 2)

NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

NOTE 2: Failure causes are described in clause 5.17.5.

Table 5.17.1.2.3.2-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-am-policyauthorization/v1/{afId}/app-am-contexts/{appAmContextId}

5.17.1.3 Resource: Individual Application AM Context

5.17.1.3.1 Introduction

This resource allows an AF to read, update or delete an existing Individual application AM context.

5.17.1.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-am-policyauthorization/v1/{afId}/app-am-contexts/{appAmContextId}

This resource shall support the resource URI variables defined in table 5.17.1.3.2-1.

Table 5.17.1.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.
appAmContextId	string	Identifier of the application AM context formatted according to IETF RFC 3986 [44].

5.17.1.3.3 Resource Methods

5.17.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.17.1.3.2.

5.17.1.3.3.2 GET

The GET method allows to read the existing application AM context for a given AF and a given application AM context Id. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.17.1.3.3.2-1.

Table 5.17.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.17.1.3.3.2-2, the response data structures and response codes specified in table 5.17.1.3.3.2-3 and the Location Headers specified in table 5.17.1.3.3.2-4 and table 5.17.1.3.3.2-5.

Table 5.17.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.17.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AppAmContextExpData	M	1	200 OK	Successful case. The exposure information of an existing Individual application AM context in the request URI is returned.
N/A			307 Temporary Redirect	Temporary redirection, during the AM context retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during the AM context retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
ProblemDetails	O	0..1	404 Not Found	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: Failure causes are described in clause 5.17.5.				

Table 5.17.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.17.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.17.1.3.3.3 PATCH

The PATCH method is used to modify an existing Individual application AM context. The AF shall initiate the HTTP PATCH request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.17.1.3.3.3-1.

Table 5.17.1.3.3.3-1: URI query parameters supported by the PATCH method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.17.1.3.3.3-2, the response data structures and response codes specified in table 5.17.1.3.3.3-3 and the Location Headers specified in table 5.17.1.3.3.3-4 and table 5.17.1.3.3.3-5.

Table 5.17.1.3.3.3-2: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
AppAmContextExpUpdateData	M	1	Contains the modification(s) to be applied to the Individual application AM context resource.

Table 5.17.1.3.3.3-3: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AppAmContextExpRespData	M	1	200 OK	Successful case. The exposure information of the updated application AM context.
N/A			204 No Content	The application AM context was updated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during the AM context modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during the AM context modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
ProblemDetails	O	0..1	400 Bad Request	(NOTE 2)
ProblemDetails	O	0..1	404 Not Found	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: Failure causes are described in clause 5.17.5.				

Table 5.17.1.3.3.3-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.17.1.3.3.3-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative NEF.

5.17.1.3.3.4 DELETE

The DELETE method deletes an existing Individual application AM context. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.17.1.3.3.4-1.

Table 5.17.1.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.17.1.3.3.4-2 and the response data structures and response codes specified in table 5.17.1.3.3.4-3, and the Location Headers specified in table 5.17.1.3.3.4-4 and table 5.17.1.3.3.4-5.

Table 5.17.1.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.17.1.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	Successful case. The application AM context was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during the AM context termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during the AM context termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
ProblemDetails	O	0..1	404 Not Found	(NOTE 2)

NOTE 1: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

NOTE 2: Failure causes are described in clause 5.17.5.

Table 5.17.1.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.17.1.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.17.1.4 Resource: AM Policy Events Subscription

5.17.1.4.1 Introduction

This resource allows an AF to create a new AM policy events subscription sub-resource or modifies an existing AM policy events subscription sub-resource.

5.17.1.4.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-am-policyauthorization/v1/{afId}/app-am-contexts/{appAmContextId}/events-subscription**

This sub-resource shall support the resource URI variables defined in table 5.17.1.4.2-1.

Table 5.17.1.4.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	string	Identifier of the AF.
appAmContextId	string	Identifier of the application AM context formatted according to IETF RFC 3986 [44].

5.17.1.4.3 Resource Methods

5.17.1.4.3.1 General

The following clauses specify the resource methods supported by the sub-resource as described in clause 5.17.1.4.2.

5.17.1.4.3.2 PUT

The PUT method allows to create a new AM policy events subscription sub-resource in an existing application AM context or modifies an existing AM policy events subscription sub-resource. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.17.1.4.3.2-1.

Table 5.17.1.4.3.2-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.17.1.4.3.2-2, the response data structures and response codes specified in table 5.17.1.4.3.2-3 and the Location Headers specified in table 5.17.1.4.3.2-4, table 5.17.1.4.3.2-5 and table 5.17.1.4.3.2-6.

Table 5.17.1.4.3.2-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
AmEventsSubscData	M	1	Contains the information for the creation and/or modification of the AM Policy Events Subscription.

Table 5.17.1.4.3.2-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AmEventsSubscRespData	M	1	201 Created	Successful case. The AM policy events subscription sub-resource was created. The representation of the AM Policy Events Subscription sub-resource is included within the properties of the AmEventsSubscData data type. The one or more matched events, if available, are included within the properties of the AmEventsNotification data type.
AmEventsSubscRespData	M	1	200 OK	Successful case. The AM policy events subscription sub-resource was modified and a representation of the sub-resource is returned. The representation of the AM Policy Events Subscription sub-resource is included within the properties of the AmEventsSubscData data type. The one or more matched events, if available, are included within the properties of the AmEventsNotification data type.
N/A			204 No Content	Successful case. The AM policy events subscription sub-resource was modified successfully, with no content to be sent in the response message body.
N/A			307 Temporary Redirect	Temporary redirection, during the AM policy events subscription or modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during the AM policy events subscription or modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
ProblemDetails	O	0..1	404 Not Found	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: Failure causes are described in clause 5.17.5.				

Table 5.17.1.4.3.2-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	Contains the URI of the resource in which an AM policy events subscription sub-resource has been created, according to the structure: {apiRoot}/3gpp-am-policyauthorization/v1/{afld}/app-am-contexts/{appAmContextId}/events-subscription

Table 5.17.1.4.3.2-5: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.17.1.4.3.2-6: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.17.1.4.3.3 DELETE

The DELETE method deletes existing subscribed AM policy event(s) within the existing Individual application AM context. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.17.1.4.3.3-1.

Table 5.17.1.4.3.3-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.17.1.4.3.3-2 and the response data structures and response codes specified in table 5.17.1.4.3.3-3 and the Location Headers specified in table 5.17.1.4.3.3-4 and table 5.17.1.4.3.3-5.

Table 5.17.1.4.3.3-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.17.1.4.3.3-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	Successful case. The AM policy event(s) subscription resource is deleted.
N/A			307 Temporary Redirect	Temporary redirection, during the AM policy events deletion. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during the AM policy events deletion. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
ProblemDetails	O	0..1	404 Not Found	(NOTE 2)

NOTE 1: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

NOTE 2: Failure causes are described in clause 5.17.5.

Table 5.17.1.4.3.3-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.17.1.4.3.3-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative NEF.

5.17.2 Notifications

5.17.2.1 Introduction

Upon receipt of AM Event Notification from the PCF indicating the subscribed AM policy event is detected, the NEF shall send an HTTP POST message including the notified AM policy event to the AF. The NEF and the AF shall support the notification mechanism as described in clause 5.2.5 of 3GPP TS 29.122 [4].

Table 5.17.2.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
AM Event Notification	{eventNotifUri}	POST	The AM policy changes event notification is provided by the NEF to the AF.

5.17.2.2 AM Event Notification

5.17.2.2.1 Description

The AM Event Notification is used by the NEF to report one or several observed AM policy change events to AF that has subscribed to such Notifications via the AM policy events subscription sub-resource.

5.17.2.2.2 Callback URI

The Callback URI "{eventNotifUri}" shall be used with the callback URI variables defined in table 5.17.2.2.2-1.

Table 5.17.2.2.2-1: Callback URI variables

Name	Definition
eventNotifUri	Callback reference provided by the AF during creation/modification of the subscription within the AM policy events subscription sub-resource as defined in Table 5.17.3.3.2-1 or Table 5.17.3.3.3-1 or Table 5.6.2.4-1 of 3GPP TS 29.534 [43].

5.17.2.2.3 Operation Definition

5.17.2.2.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.17.2.2.3.1-1 and the response data structures and response codes specified in table 5.17.2.2.3.1-2 and the Location Headers specified in table 5.17.2.2.3.1-3 and table 5.17.2.2.3.1-4.

Table 5.17.2.2.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AmEventsNotification	M	1	Provides information about the observed access and mobility policy change events by the NEF to the AF.

Table 5.17.2.2.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The event notification is received successfully.
N/A			307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.17.2.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

Table 5.17.2.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

5.17.2.2.3.2 Notification via Websocket

If supported by both AF and NEF and successfully negotiated, the AM Event Notification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4 of 3GPP TS 29.122 [4].

5.17.3 Data Model

5.17.3.1 General

This clause specifies the application data model supported by the AMPolicyAuthorization API.

Table 5.17.3.1-1 specifies the data types defined for the AMPolicyAuthorization API.

Table 5.17.3.1-1: AMPolicyAuthorization API specific Data Types

Data type	Clause defined	Description	Applicability
AppAmContextExpData	5.17.3.3.2	Represents an Individual application AM context exposure resource.	
AppAmContextExpRespData	5.17.3.5.1	Represents a response to a modification or creation request of an Individual Application AM context resource. It may contain the notification of the already met events.	
AppAmContextExpUpdateData	5.17.3.3.3	Contains the modification(s) to be applied to the Individual application AM context exposure resource.	
GeographicalArea	5.17.3.3.4	Contains geographical area information (e.g. a civic address or shapes).	

5.17.3.2 Reused data types

The data types reused by the AMPolicyAuthorization API from other specifications are listed in table 5.17.3.2-1.

Table 5.17.3.2-1: Re-used Data Types

Data type	Reference	Comments
AmEventsNotification	3GPP TS 29.534 [43]	Describes the notification about the events occurred within an Individual application AM context resource.
AmEventsSubscData	3GPP TS 29.534 [43]	Identifies the AM policy events the application subscribes to.
AmEventsSubscDataRm	3GPP TS 29.534 [43]	This data type is defined in the same way as the "AmEventsSubscData" data type, but with the OpenAPI "nullable: true" property.
AmEventsSubscRespData	3GPP TS 29.534 [43]	It represents a response to an AM policy events subscription request and contains the created/updated AM Policy Events Subscription resource. It may also include the Notification of the events met at the time of subscription.
CivicAddress	3GPP TS 29.572 [34]	Identifies the civic address.
DurationSec	3GPP TS 29.122 [4]	Indicates the time duration.
DurationSecRm	3GPP TS 29.122 [4]	Indicates the time duration, same as the "DurationSec" data type, but with the OpenAPI "nullable: true" property.
GeographicArea	3GPP TS 29.572 [34]	Identifies the geographical information with shapes.
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
Link	3GPP TS 29.122 [4]	Identifies a referenced resource.
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.17.4-1.
WebsocketNotifConfig	3GPP TS 29.122 [4]	Contains the configuration parameters to set up notification delivery over Websocket protocol.

5.17.3.3 Structured data types

5.17.3.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.17.3.3.2 Type: AppAmContextExpData

Table 5.17.3.3.2-1: Definition of type AppAmContextExpData

Attribute name	Data type	P	Cardinality	Description	Applicability
self	Link	C	0..1	Identifies the individual configuration resource. Shall be present in the HTTP GET response when reading all the configurations for an AF.	
evSubscs	AmEventsSubscData	O	0..1	Represents the subscription to one or more AM policy events.	
gpsi	Gpsi	M	1	Identifies the GPSI.	
highThruInd	boolean	C	0..1	Indicates whether high throughput is desired for the indicated UE traffic. Set to "true" if high throughput is desired; otherwise set to "false". Default value is "false" if omitted. (NOTE)	
covReqs	array(Geographical Area)	C	1..N	Identifies the allowed geographical areas. (NOTE)	
policyDuration	DurationSec	O	0..1	Indicates the time duration that the policy shall last.	
suppFeat	SupportedFeatures	C	0..1	Indicates the negotiated supported features.. It shall be supplied by the AF in the POST request that requests a creation of an Individual application AM context resource. It shall be supplied by the NEF in the response to the POST request that requests a creation of an Individual application AM context resource.	
requestTestNotification	boolean	O	0..1	Set to true by the AF to request the NEF to send a test notification as defined in clause 5.2.5.3 of 3GPP TS 29.122 [4]. Set to false or omitted otherwise.	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	O	0..1	Configuration parameters to set up notification delivery over Websocket protocol.	Notification_websocket

NOTE: Either "highThruInd" attribute or "covReqs" attribute or both shall be included.

5.17.3.3.3 Type: AppAmContextExpUpdateData

Table 5.17.3.3.3-1: Definition of type AppAmContextExpUpdateData

Attribute name	Data type	P	Cardinality	Description	Applicability
evSubscs	AmEventsSubscDataRm	O	0..1	Represents the subscription to one or more AM policy events.	
highThruInd	boolean	O	0..1	Indicates whether high throughput is desired for the indicated UE traffic. Set to "true" if high throughput is desired; otherwise set to "false".	
covReqs	array(Geographical Area)	O	1..N	Identifies the allowed geographical areas. (NOTE)	
policyDuration	DurationSecRm	O	0..1	Indicates the time duration that the policy shall last.	
NOTE: The value of the property shall be set to NULL for removal.					

5.17.3.3.4 Type: GeographicalArea

Table 5.17.3.3.4-1: Definition of type GeographicalArea

Attribute name	Data type	P	Cardinality	Description	Applicability
civicAddress	CivicAddress	C	0..1	Identifies a civic address.	
shapes	GeographicArea	C	0..1	Identifies a geographic area specified by different shapes.	
NOTE: One of "civicAddress" attribute or "shapes" attribute shall be included.					

5.17.3.4 Simple data types and enumerations

5.17.3.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.17.3.4.2 Simple data types

The simple data types defined in table 5.17.3.4.2-1 shall be supported.

Table 5.17.3.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.17.3.5 Data types describing alternative data types or combinations of data types

5.17.3.5.1 Type: AppAmContextExpRespData

Table 5.17.3.5.1-1: Definition of type AppAmContextExpRespData as a list of non-exclusive alternatives

Data type	Cardinality	Description	Applicability
AmEventsNotification	0..1	It represents the notification of a match event during the creation or modification of the Individual application AM context data.	
AppAmContextExpData	1	It represents the Individual application AM context resource.	

5.17.4 Used Features

The table below defines the features applicable to the AMPolicyControl API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.17.4-1: Features used by AMPolicyAuthorization API

Feature number	Feature Name	Description
1	Notification_websocket	The delivery of notifications over Websocket is supported as described in 3GPP TS 29.122 [4]. This feature requires that the Notification_test_event feature is also supported.
2	Notification_test_event	The testing of notification connection is supported as described in 3GPP TS 29.122 [4].

5.17.5 Error handling

5.17.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.17.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the AMPolicyAuthorization API.

5.17.5.3 Application Errors

The application errors defined for the AMPolicyAuthorization API are listed in table 5.17.5.3-1.

Table 5.17.5.3-1: Application errors

Application Error	HTTP status code	Description
INVALID_POLICY_REQUEST	400 Bad Request	The HTTP request is rejected because the service information for the AM context is invalid or insufficient for the PCF to perform the requested action.
APPLICATION_AM_CONTEXT_NOT_FOUND	404 Not Found	The HTTP request is rejected because the specified Individual Application AM Context does not exist.
POLICY_ASSOCIATION_NOT_AVAILABLE	500 Internal Server Error	The PCF failed in executing binding with the UE/AM Policy Context.

5.18 AMInfluence API

5.18.1 Resources

5.18.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-am-influence/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-am-influence" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.18.1.1-1 and the resources and HTTP methods used for the AMInfluence API.

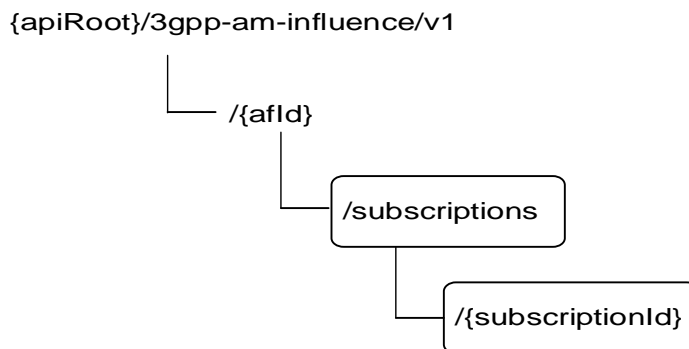


Figure 5.18.1.1-1: Resource URI structure of the AMInfluence API

Table 5.18.1.1-1 provides an overview of the resources and HTTP methods applicable for the AMInfluence API.

Table 5.18.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
AM Influence Subscription	/{afld}/subscriptions	GET	Read all subscriptions for a given AF.
		POST	Create a new subscription to AM influence.
Individual AM Influence Subscription	/{afld}/subscriptions/{subscriptionId}	GET	Read a subscription to AM influence.
		PUT	Modify all of the properties of an existing subscription to AM influence.
		PATCH	Modify part of the properties of an existing subscription to AM influence.
		DELETE	Delete a subscription to AM influence.

5.18.1.2 Resource: AM Influence Subscription

5.18.1.2.1 Introduction

This resource allows an AF to read all active AM influence subscriptions and create a new subscription resource for a given AF.

5.18.1.2.2 Resource Definition

Resource URI: {apiRoot}/3gpp-am-influence/v1/{afld}/subscriptions

This resource shall support the resource URI variables defined in table 5.18.1.2.2-1.

Table 5.18.1.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	string	Identifier of the AF.

5.18.1.2.3 Resource Methods

5.18.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.18.1.2.2.

5.18.1.2.3.2 GET

The GET method allows to read all active subscriptions for a given AF. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.18.1.2.3.2-1.

Table 5.18.1.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.18.1.2.3.2-2 and the response data structures and response codes specified in table 5.18.1.2.3.2-3.

Table 5.18.1.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.18.1.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(AmInfluSub)	M	0..N	200 OK	The subscription information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.18.1.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.18.1.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.18.1.2.3.3 POST

The POST method creates a new subscription resource to AM influence subscription for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.18.1.2.3.3-1 and the response data structures and response codes specified in table 5.18.1.2.3.3-2.

Table 5.18.1.2.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AmInfluSub	M	1	Parameters to create a resource for the AM Influence and/or notification about service area coverage outcome events with the NEF.

Table 5.18.1.2.3.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AmInfluSub	M	1	201 Created	The subscription was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.18.1.2.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-am-Influence/v1/{afId}/subscriptions/{subscriptionId}

5.18.1.3 Resource: Individual AM Influence Subscription

5.18.1.3.1 Introduction

This resource allows an AF to read, update or delete an existing AM Influence subscription.

5.18.1.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-am-influence/v1/{afId}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.18.1.3.2-1.

Table 5.18.1.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.
subscriptionId	string	Identifier of the subscription.

5.18.1.3.3 Resource Methods

5.18.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.18.1.3.2.

5.18.1.3.3.2 GET

The GET method allows to read the active subscription for a given AF and subscription Id. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.18.1.3.3.2-1.

Table 5.18.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.18.1.3.3.2-2 and the response data structures and response codes specified in table 5.18.1.3.3.2-3.

Table 5.18.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.18.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AmInfluSub	M	1	200 OK	The subscription information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.18.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.18.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.18.1.3.3.3 PUT

The PUT method is used to replace an existing subscription resource to update a subscription. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.18.1.3.3.3-1 and the response data structures and response codes specified in table 5.18.1.3.3.3-2.

Table 5.18.1.3.3.3-1: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
AmInfluSub	M	1	Modify an existing AM Influence subscription.

Table 5.18.1.3.3.3-2: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AmInfluSub	M	1	200 OK	The subscription was replaced successfully and a representation is returned.
N/A			204 No Content	The subscription was replaced successfully.

N/A			307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.18.1.3.3.3-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.18.1.3.3.3-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.18.1.3.3.4 PATCH

The PATCH method allows to change some properties of an existing AM influence subscription. The AF shall initiate the HTTP PATCH request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.18.1.3.3.4-1 and the response data structures and response codes specified in table 5.18.1.3.3.4-2.

Table 5.18.1.3.3.4-1: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
AmInfluSubPatch	M	1	Partial update of a subscription to AM influence and/or notifications about service area coverage outcome events with the NEF.

Table 5.18.1.3.3.4-2: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AmInfluSub	M	1	200 OK	The subscription was partial modified successfully and a representation is returned.
N/A			204 No Content	The subscription was partial modified successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE: The mandatory HTTP error status codes for the PATCH method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.18.1.3.3.4-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.18.1.3.3.4-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.18.1.3.3.5 DELETE

The DELETE method deletes an existing individual AM influence subscription for a given AF. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.18.1.3.3.5-1.

Table 5.18.1.3.3.5-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.18.1.3.3.5-2 and the response data structures and response codes specified in table 5.18.1.3.3.5-3.

Table 5.18.1.3.3.5-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.18.1.3.3.5-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The subscription was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.18.1.3.3.5-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.18.1.3.3.5-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.18.2 Notifications

5.18.2.1 Introduction

Upon receipt of a service area coverage outcome event from the PCF, the NEF shall send an HTTP POST message including the notified event to the AF. The NEF and the AF shall support the notification mechanism as described in clause 5.2.5 of 3GPP TS 29.122 [4].

Table 5.18.2.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Event Notification	{notificationDestination}	POST	The service area coverage outcome event from the NEF to the AF.

5.18.2.2 Event Notification

5.18.2.2.1 Description

The Event Notification is used by the NEF to report notification of the service area coverage outcome event from the PCF to the AF.

5.18.2.2.2 Target URI

The Callback URI "{notificationDestination}" shall be used with the callback URI variables defined in table 5.18.2.2.2-1.

Table 5.18.2.2.2-1: Callback URI variables

Name	Data type	Definition
notificationDestination	Link	Callback reference provided by the AF during creation/modification of the subscription within the AmInfluSub data type as defined in Table 5.18.3.3.2-1 or the AmInfluSubPatch data type as defined in Table 5.18.3.3.3-1.

5.18.2.2.3 Operation Definition

5.18.2.2.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.18.2.2.3.1-1 and the response data structures and response codes specified in table 5.18.2.2.3.1-2.

Table 5.18.2.2.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AmInfluEventNotif	M	1	The service area coverage outcome event notification is provided by the NEF to the AF.

Table 5.18.2.2.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The event notification is received successfully.
N/A			307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.18.2.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

Table 5.18.2.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

5.18.2.2.3.2 Notification via Websocket

If supported by both AF and NEF and successfully negotiated, the AmInfluEventNotif may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4 of 3GPP TS 29.122 [4].

5.18.3 Data Model

5.18.3.1 General

This clause specifies the application data model supported by the AMInfluence API.

Table 5.18.3.1-1 specifies the data types defined for the AMInfluence API.

Table 5.18.3.1-1: AMInfluence API specific Data Types

Data type	Clause defined	Description	Applicability
AmInfluEvent	5.18.3.4.3	Represents the service area coverage outcome event.	
AmInfluEventNotif	5.18.3.3.4	Represents an AM influence event notification.	
AmInfluSub	5.18.3.3.2	Represents an AM influence subscription.	
AmInfluSubPatch	5.18.3.3.3	Represents parameters to request the modification of an AM influence subscription resource.	
DnnSnssaiInformation	5.18.3.3.5	Represents a (DNN, SNSSAI) combination.	

5.18.3.2 Reused data types

The data types reused by the AMInfluence API from other specifications are listed in table 5.18.3.2-1.

Table 5.18.3.2-1: Re-used Data Types

Data type	Reference	Comments
Dnn	3GPP TS 29.571 [8]	Identifies a DNN.
DurationSec	3GPP TS 29.122 [4]	Indicates the time duration.
DurationSecRm	3GPP TS 29.122 [4]	Indicates the time duration, same as the "DurationSec" data type, but with the OpenAPI "nullable: true" property.
ExternalGroupId	3GPP TS 29.122 [4]	External Group Identifier for a user group.
GeographicalArea	5.17.3.3.4	Identifies the geographical area information.
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
LinkRm	3GPP TS 29.122 [4]	Indicates a referenced resource, same as the "Link" data type, but with the OpenAPI "nullable: true" property.
Link	3GPP TS 29.122 [4]	Identifies a referenced resource.
Snssai	3GPP TS 29.571 [8]	Identifies the S-NSSAI.
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.18.4-1.
WebsocketNotifConfig	3GPP TS 29.122 [4]	Contains the configuration parameters to set up notification delivery over Websocket protocol.

5.18.3.3 Structured data types

5.18.3.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.18.3.3.2 Type: AmInfluSub

This type represents an AM influence subscription. The same structure is used in the subscription request and subscription response.

Table 5.18.3.3.2-1: Definition of type AMInfluSub

Attribute name	Data type	P	Cardinality	Description	Applicability (NOTE 1)
afTransId	string	M	1	Identifies an NEF Northbound interface transaction request, generated by the AF.	
gpsi	Gpsi	O	0..1	Identifies a user with GPSI. (NOTE 3)	
externalGroupId	ExternalGroupId	O	0..1	Identifies a group of users. (NOTE 3)	
anyUeInd	boolean	O	0..1	Identifies whether the AF request applies to any UE (i.e. all UEs). This attribute shall set to "true" if applicable for any UE, otherwise, set to "false". (NOTE 2) (NOTE 3)	
dnnSnsSaiInfos	array(DnnSnsSaiInformation)	O	1..N	Each of the element identifies a combination of (DNN, S-NSSAI).	
afAppIds	array(string)	O	1..N	Identifies application(s).	
highThruInd	boolean	C	0..1	Indicates whether high throughput is desired for UE traffic. Set to "true" if high throughput is desired; otherwise set to "false". Default value is "false" if omitted. (NOTE 4)	
geoAreas	array(Geographical Area)	C	1..N	Identifies geographical areas of the user where the request is applicable. (NOTE 4)	
policyDuration	DurationSec	O	0..1	Indicates the time duration that the policy shall last.	
self	Link	C	0..1	Link to the created resource. This parameter shall be supplied by the NEF in HTTP responses that include an object of AmlInfluSub type.	
subscribedEvents	array(AmlInfluEvent)	O	1..N	Identifies the requirement to be notified of the event(s).	
notificationDestination	Link	C	0..1	Contains the Callback URL to receive the notification from the NEF. It shall be present if the "subscribedEvents" is present.	
requestTestNotification	boolean	O	0..1	Set to true by the AF to request the NEF to send a test notification as defined in clause 5.2.5.3 of 3GPP TS 29.122 [4]. Set to false or omitted otherwise.	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	O	0..1	Configuration parameters to set up notification delivery over WebSocket protocol.	Notification_websocket
suppFeat	SupportedFeatures	C	0..1	Indicates the list of Supported features used as described in clause 5.18.4. This attribute shall be provided in the POST request and in the response of successful resource creation.	
NOTE 1: Properties marked with a feature as defined in clause 5.18.4 are applicable as described in clause 5.2.7 of 3GPP TS 29.122 [4]. If no feature is indicated, the related property applies for all the features.					

NOTE 2:	If target to any UE, then "anyUeInd" attribute together with "dnnSnssaiInfos" attribute or "afAppIds" attribute shall be included.
NOTE 3:	One of individual UE identifier (i.e. "gpsi" attribute), External Group Identifier (i.e. "externalGroupId") or any UE indication "anyUeInd" shall be included.
NOTE 4:	Any of the "highThruInd" attribute or "geoAreas" attribute shall be included.

5.18.3.3.3 Type: AmlInfluSubPatch

This type represents AM influence subscription parameters provided by the AF to the NEF. The structure is used for HTTP PATCH request.

Table 5.18.3.3.3-1: Definition of type AmlInfluSubPatch

Attribute name	Data type	P	Cardinality	Description	Applicability
highThruInd	boolean	O	0..1	Indicates whether high throughput is desired for UE traffic. Set to "true" if high throughput is desired; otherwise set to "false".	
geoAreas	array(Geographical Area)	O	1..N	Identifies geographical areas of the user where the UE is located. (NOTE 1)	
policyDuration	DurationSecRm	O	0..1	Indicates the time duration that the policy shall last. (NOTE 1)	
dnnSnssaiInfos	array(DnnSnssaiInformation)	O	1..N	Each of the element identifies a combination of (DNN, S-NSSAI). (NOTE 1)	
subscribedEvents	array(AmlInfluEvent)	O	1..N	Identifies the requirement to be notified of the event(s). (NOTE 1)	
notificationDestination	LinkRm	O	0..1	Contains the Callback URL to receive the notification from the NEF. (NOTE 1, NOTE 2)	
afAppIds	array(string)	O	1..N	Identifies application(s). (NOTE 1)	
NOTE 1: The value of the property shall be set to NULL for removal.					
NOTE 2: The notificationDestination attribute set to NULL may be included only if the subscribedEvents attribute is included and set to NULL.					

5.18.3.3.4 Type: AmlInfluEventNotif

Table 5.18.3.3.4-1: Definition of type AmlInfluEventNotif

Attribute name	Data type	P	Cardinality	Description	Applicability (NOTE 1)
afTransId	string	M	1	Identifies the AF request for AM policy influence that the event report is related to.	
event	AmlInfluEvent	M	1	Notified event.	
geoAreas	array(GeographicalArea)	C	1..N	Identifies geographical areas of the user where the UE is located.	

5.18.3.3.5 Type: DnnSnssaiInformation

Table 5.18.3.3.5-1: Definition of type DnnSnssaiInformation

Attribute name	Data type	P	Cardinality	Description	Applicability
dnn	Dnn	O	0..1	Identifies a DNN, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only.	
snssai	Snssai	O	0..1	Identifies an S-NSSAI.	

5.18.3.4 Simple data types and enumerations

5.18.3.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.18.3.4.2 Simple data types

The simple data types defined in table 5.18.3.4.2-1 shall be supported.

Table 5.18.3.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.18.3.4.3 Enumeration: AmInfluEvent

The enumeration AmInfluEvent represents the service area coverage outcome event. It shall comply with the provisions defined in table 5.18.3.4.3-1.

Table 5.18.3.4.3-1: Enumeration AmInfluEvent

Enumeration value	Description
SERVICE_AREA_COVR_G_OUTCOME	Indicates the service area coverage outcome.

5.18.4 Used Features

The table below defines the features applicable to the AMInfluence API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.18.4-1: Features used by AMInfluence API

Feature number	Feature Name	Description
1	Notification_websocket	The delivery of notifications over Websocket is supported as described in 3GPP TS 29.122 [4]. This feature requires that the Notification_test_event feature is also supported.
2	Notification_test_event	The testing of notification connection is supported as described in 3GPP TS 29.122 [4].
Feature: A short name that can be used to refer to the bit and to the feature, e.g. "Notification".		
Description: A clear textual description of the feature.		

5.18.5 Error handling

5.18.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.18.5.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the AMInfluence API.

5.18.5.3 Application Errors

The application errors defined for AMInfluence API are listed in table 5.18.5.3-1.

Table 5.18.5.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

5.19 MBSTMGI API

5.19.1 Introduction

The Nnef_MBSTMGI service shall use the MBSTMGI API.

The API URI of MBSTMGI API shall be:

{apiRoot}/3gpp-mbs-tmgi/v1

with the following components:

- "apiRoot" is set as defined in clause 5.2.4 of 3GPP TS 29.122 [4].
- "apiName" shall be set to "3gpp-mbs-tmgi".
- "apiVersion" shall be set to "v1" for the current version defined in the present document.

All resource URIs in the clauses below are defined relative to the above root URI.

5.19.2 Resources

There are no resources defined for this API in this release of the specification.

5.19.3 Custom Operations without associated resources

5.19.3.1 Overview

The structure of the custom operation URIs of the MBSTMGI API is shown in Figure 5.19.3.1-1.

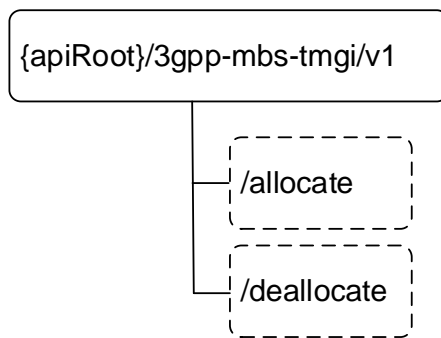


Figure 5.19.3.1-1: Custom operation URI structure of the MBSTMGI API

Table 5.19.3.1-1 provides an overview of the custom operations and applicable HTTP methods.

Table 5.19.3.1-1: Custom operations without associated resources

Operation name	Custom operation URI	Mapped HTTP method	Description
Allocate	/allocate	POST	Request the allocation of TMGI(s) for new MBS session(s) or the refresh of the expiry time of already allocated TMGI(s).
Deallocate	/deallocate	POST	Request the deallocation of TMGI(s).

5.19.3.2 Operation: Allocate

5.19.3.2.1 Description

The custom operation enables an AF to request the allocation of TMGI(s) for new MBS session(s) or the refresh of the expiry time of already allocated TMGI(s).

5.19.3.2.2 Operation Definition

This operation shall support the request and response data structures and response codes specified in table 5.19.3.2.2-1 and table 5.19.3.2.2-2.

Table 5.19.3.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
TmgiAllocRequest	M	1	Represents the parameters to request the allocation of TMGI(s) for new MBS session(s) or the refresh of the expiry time of already allocated MBS TMGI(s).

Table 5.19.3.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
TmgiAllocResponse	M	1	200 OK	Successful case: The TMGI allocation information (e.g. allocated MBS TMGIs, expiry time) or the refreshed expiry time for the concerned already allocated MBS TMGI(s) is/are returned to the requesting AF.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
ProblemDetailsTmgiAlloc	O	0..1	403 Forbidden	(NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: Failure cases are described in clause 5.19.7.				

Table 5.19.3.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

Table 5.19.3.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

5.19.3.3 Operation: Deallocate

5.19.3.3.1 Description

The custom operation enables an AF to request the deallocation of TMGI(s).

5.19.3.3.2 Operation Definition

This operation shall support the request and response data structures and response codes specified in table 5.19.3.3.2-1 and table 5.19.3.3.2-2.

Table 5.19.3.3.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
TmgiDeallocRequest	M	1	Represents the MBS TMGI(s) deallocation request information (e.g. list of MBS TMGI(s) to be deallocated).

Table 5.19.3.3.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case: The requested MBS TMGI(s) are deallocated.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.19.3.3.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

Table 5.19.3.3.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

5.19.4 Notifications

5.19.4.1 General

Notifications shall comply to clause 5.2.5 of 3GPP TS 29.122 [4].

Table 5.19.4.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Notification of Allocated MBS TMGI(s) Timer Expiry	{notificationUri}	POST	Enable the NEF to notify an AF of the timer expiry for already allocated MBS TMGI(s).

5.19.4.2 Notification of Allocated MBS TMGI(s) Timer Expiry

5.19.4.2.1 Description

The Notification is used by the NEF to report timer expiry of already allocated TMGI(s) to the AF.

5.19.4.2.2 Target URI

The Callback URI "{notificationUri}" shall be used with the callback URI variables defined in table 5.19.4.2.2-1.

Table 5.19.4.2.2-1: Callback URI variables

Name	Definition
notificationUri	Callback URI provided by the AF during the MBS TMGI(s) allocation or expiry time refresh request as defined in table 5.19.5.2.2-1.

5.19.4.2.3 Operation Definition

5.19.4.2.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.19.4.2.3.1-1 and the response data structures and response codes specified in table 5.19.4.2.3.1-2.

Table 5.19.4.2.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
ExpiryNotif	M	1	Represents the MBS TMGI(s) timer expiry notification information (e.g. list of MBS TMGI(s) for which the timer has expired).

Table 5.19.4.2.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The notification is received successfully.
n/a			307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.19.4.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

Table 5.19.4.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

5.19.4.2.3.2 Notification via Websocket

If supported by both AF and NEF and successfully negotiated, the Notification of Allocated MBS TMGI(s) Timer Expiry may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4 of 3GPP TS 29.122 [4].

5.19.5 Data Model

5.19.5.1 General

This clause specifies the application data model supported by the MBSTMGI API. Table 5.19.5.1-1 specifies the data types defined for the MBSTMGI API.

Table 5.19.5.1-1: MBSTMGI specific Data Types

Data type	Clause defined	Description	Applicability
ExpiryNotif	5.19.5.2.5	Represents TMGI(s) timer expiry notification information.	
ProblemDetailsTmgiAlloc	5.19.5.4.1	Represents an extension to the ProblemDetails data structure with additional error information related to TMGI Allocation.	
ReducedMbsServArea	5.19.5.2.6	Represents the reduced MBS Service area information.	
TmgiAllocRequest	5.19.5.2.2	Represents the full set of parameters to initiate a TMGI(s) allocation request or the refresh of the expiry time of already allocated TMGI(s).	
TmgiAllocResponse	5.19.5.2.3	Represents TMGI(s) allocation information or the refreshed expiry time for already allocated TMGI(s).	
TmgiDeallocRequest	5.19.5.2.4	Represents information to request the deallocation of TMGI(s).	

Table 5.19.5.1-2 specifies data types re-used by the MBSTMGI API from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the MBSTMGI API.

Table 5.19.5.1-2: MBSTMGI API re-used Data Types

Data type	Reference	Comments	Applicability
ExternalMbsServiceArea	3GPP TS 29.571 [8]	Represents an external MBS service area.	
MbsServiceArea	3GPP TS 29.571 [8]	Represents an MBS service area.	
Tmgi	3GPP TS 29.571 [8]	Contains a TMGI.	
TmgiAllocate	3GPP TS 29.532 [52]	Contains parameters to initiate a TMGI(s) allocation request or the refresh of the expiry time of already allocated TMGI(s).	
TmgiAllocated	3GPP TS 29.532 [52]	Contains the TMGI(s) allocation information or the refreshed expiry time for already allocated TMGI(s).	
Uri	3GPP TS 29.122 [4]	Contains a TMGI.	
WebsocketNotifConfig	3GPP TS 29.122 [4]	Contains the configuration parameters to set up notification delivery over Websocket protocol.	

5.19.5.2 Structured data types

5.19.5.2.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.19.5.2.2 Type: TmgiAllocRequest

Table 5.19.5.2.2-1: Definition of type TmgiAllocRequest

Attribute name	Data type	P	Cardinality	Description	Applicability
afId	string	M	1	Contains the identifier of the AF that is sending the request.	
tmgiParams	TmgiAllocate	M	1	Contains the parameters to request the allocation of TMGI(s) for new MBS session(s) or the refresh of the expiry time of already allocated MBS TMGI(s).	
notificationUri	Uri	O	0..1	The notification URI via which the AF desires to receive notifications on timer expiry for MBS TMGI(s).	
mbsServiceArea	MbsServiceArea	O	0..1	Indicates the MBS service area for the TMGI(s) to be allocated. This attribute may be provided by the AF for a local MBS service. (NOTE)	
extMbsServiceArea	ExternalMbsServiceArea	O	0..1	Indicates the external MBS service area for the TMGI(s) to be allocated. This attribute may be provided by the AF for a local MBS service. (NOTE)	
requestTestNotification	boolean	O	0..1	Indicates whether sending a test notification shall be performed. Set to "true" by the AF to request the NEF to send a test notification as defined in clause 5.2.5.3 of 3GPP TS 29.122 [4]. Set to "false" or omitted otherwise.	Notification_test_event
websocketNotifConfig	WebsocketNotifConfig	O	0..1	Represents configuration parameters to set up notification delivery over the Websocket protocol.	Notification_websocket
suppFeat	SupportedFeatures	C	0..1	Indicates the features supported by the AF. This attribute shall be provided if feature negotiation needs to take place.	

NOTE: These attributes are mutually exclusive. Either one of them may be present.

5.19.5.2.3 Type: TmgiAllocResponse

Table 5.19.5.2.3-1: Definition of type TmgiAllocResponse

Attribute name	Data type	P	Cardinality	Description	Applicability
tmgInfo	TmgiAllocated	M	1	Contains the MBS TMGI(s) allocation information or the refreshed expiry time for already allocated MBS TMGI(s).	
suppFeat	SupportedFeatures	C	0..1	Indicates the features supported by both the AF and the NEF. This attribute shall be provided if feature negotiation needs to take place and it was provided by the AF in the corresponding request body.	

5.19.5.2.4 Type: TmgiDeallocRequest

Table 5.19.5.2.4-1: Definition of type TmgiDeallocRequest

Attribute name	Data type	P	Cardinality	Description	Applicability
afId	string	M	1	Contains the identifier of the AF that is sending the request.	
tmgis	array(Tmgi)	M	1..N	Contains the list of TMGI(s) to be deallocated.	

5.19.5.2.5 Type: ExpiryNotif

Table 5.19.5.2.5-1: Definition of type ExpiryNotif

Attribute name	Data type	P	Cardinality	Description	Applicability
tmgis	array(Tmgi)	M	1..N	Contains the list of previously allocated MBS TMGI(s) for which the timer expired.	

5.19.5.2.6 Type: ReducedMbsServArea

Table 5.19.5.2.6-1: Definition of type ReducedMbsServArea

Attribute name	Data type	P	Cardinality	Description	Applicability
reducedMbsServArea	MbsServiceArea	C	0..1	Represents the reduced MBS service area information that can be supported by a single MB-SMF. (NOTE 1) (NOTE 3)	
reducedExtMbsServArea	ExternalMbsServiceArea	C	0..1	Represents the reduced external MBS service area information that can be supported by a single MB-SMF. (NOTE 1) (NOTE 4)	
reducedMbsServAreas	array(MbsServiceArea)	C	1..N	Represents the additional reduced MBS Service Areas. Each reduced MBS Service Area provided within each array element of this attribute can be supported by a single MB-SMF. (NOTE 2) (NOTE 4)	
reducedExtMbsServAreas	ExternalMbsServiceArea	C	1..N	Represents the additional reduced external MBS Service Areas. Each reduced MBS Service Area provided within each array element of this attribute can be supported by a single MB-SMF. (NOTE 2) (NOTE 3)	
NOTE 1: These attributes are mutually exclusive. Either one of them shall be present. NOTE 2: These attributes are mutually exclusive. Either one of them may be present. NOTE 3: If the "reducedMbsServArea" attribute is present, then the "reducedExtMbsServAreas" attribute shall not be present. NOTE 4: If the "reducedExtMbsServArea" attribute is present, then the "reducedMbsServAreas" attribute shall not be present.					

5.19.5.3 Simple data types and enumerations

5.19.5.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.19.5.3.2 Simple data types

The simple data types defined in Table 5.19.5.3.2-1 shall be supported.

Table 5.19.5.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.19.5.4 Data types describing alternative data types or combinations of data types

5.19.5.4.1 Type: ProblemDetailsTmgiAlloc

Table 5.19.5.4.1-1: Definition of type ProblemDetailsTmgiAlloc as a list of to be combined data types

Data type	Cardinality	Description	Applicability
ProblemDetails	1	Contains additional error related information.	
ReducedMbsServArea	0..1	Contains the reduced MBS Service Area information.	

5.19.6 Used Features

The table below defines the features applicable to the MBSTMGI API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.19.6-1: Features used by MBSTMGI API

Feature number	Feature Name	Description
1	Notification_websocket	The delivery of notifications over Websocket is supported as described in 3GPP TS 29.122 [4]. This feature requires that the Notification_test_event feature is also supported.
2	Notification_test_event	The testing of notification connection is supported as described in 3GPP TS 29.122 [4].

5.19.7 Error handling

5.19.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following subclauses shall apply.

5.19.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MBSTMGI API.

5.19.7.3 Application Errors

The application errors defined for the MBSTMGI API are listed in table 5.19.7.3-1.

Table 5.19.7.3-1: Application errors

Application Error	HTTP status code	Description
MBS_SERVICE_AREA_TOO_LARGE	403 Forbidden	Indicates that the TMGI allocation request is rejected because the provided MBS Service Area cannot be supported by the network as it is too large to be served by a single MB-SMF.

5.20 MBSSession API

5.20.1 Introduction

The Nnef_MBSSession service shall use the MBSSession API.

The API URI of MBSSession API shall be:

{apiRoot}/3gpp-mbs-session/v1

with the following components:

- "apiRoot" is set as defined in clause 5.2.4 of 3GPP TS 29.122 [4].
- "apiName" shall be set to "3gpp-mbs-session".
- "apiVersion" shall be set to "v1" for the current version defined in the present document.

All resource URIs in the clauses below are defined relative to the above root URI.

5.20.2 Resources

5.20.2.1 Overview

This clause describes the structure for the Resource URIs as shown in figure 5.20.2.1-1 and the resources and HTTP methods used for the MBSSession API.

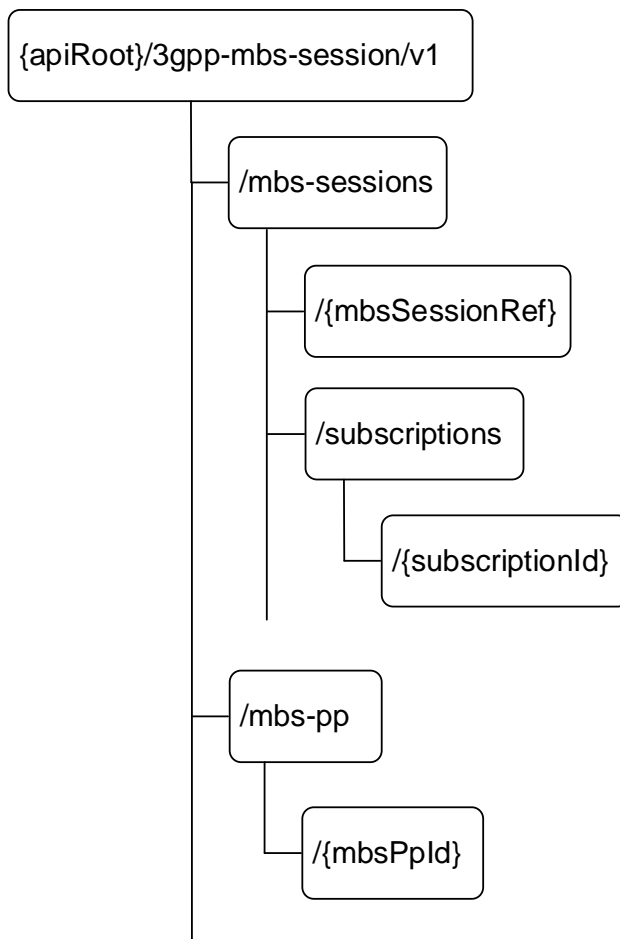


Figure 5.20.2.1-1: Resource URI structure of the MBSSession API

Table 5.20.2.1-1 provides an overview of the resources and applicable HTTP methods.

Table 5.20.2.1-1: Resources and methods overview

Resource name	Resource URI (relative path under API URI)	HTTP method or custom operation	Description (service operation)
MBS Sessions	/mbs-sessions	POST	Create an MBS Session.
Individual MBS Session	/mbs-sessions/{mbsSessionRef}	PATCH	Modify an existing Individual MBS Session resource.
		DELETE	Delete an existing Individual MBS Session resource.
MBS Session Subscriptions	/mbs-sessions/subscriptions	GET	Retrieve all the MBS Session Subscriptions
		POST	Create an MBS Session Subscription.
Individual MBS Session Subscription	/mbs-sessions/subscriptions/{subscriptionId}	GET	Retrieve an existing Individual MBS Session Subscription resource.
		DELETE	Delete an existing Individual MBS Session Subscription resource.
MBS Parameters Provisionings	/mbs-pp	GET	Retrieve all the MBS Parameters Provisioning resources.
		POST	Request the creation of a new MBS Parameters Provisioning.
Individual MBS Parameters Provisioning	/mbs-pp/{mbsPpId}	GET	Retrieve an existing individual MBS Parameters Provisioning resource.
		PUT	Request the update of an existing Individual MBS Parameters Provisioning resource.
		PATCH	Request the modification of an existing Individual MBS Parameters Provisioning resource.
		DELETE	Request the deletion of an existing Individual MBS Parameters Provisioning resource.

5.20.2.2 Resource: MBS sessions

5.20.2.2.1 Introduction

This resource represents the collection of MBS sessions managed by the NEF.

This resource is modelled with the Collection resource archetype (see clause C.2 of 3GPP TS 29.501 [3]).

5.20.2.2.2 Resource Definition

Resource URI: {apiRoot}/3gpp-mbs-session/v1/mbs-sessions

This resource shall support the resource URI variables defined in table 5.20.2.2.2-1.

Table 5.20.2.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.20.1.

5.20.2.2.3 Resource Methods

5.20.2.2.3.1 POST

This method enables an AF to request the creation of an MBS session resource at the NEF.

This method shall support the URI query parameters specified in table 5.20.2.2.3.1-1.

Table 5.20.2.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
N/A					

This method shall support the request data structures specified in table 5.20.2.2.3.1-2 and the response data structures and response codes specified in table 5.20.2.2.3.1-3.

Table 5.20.2.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
MbsSessionCreateReq	M	1	Representation of the MBS session to be created at the NEF.

Table 5.20.2.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MbsSessionCreateRsp	M	1	201 Created	Successful case. A representation of the created Individual MBS Session resource is returned. The URI of the created resource shall be returned in an HTTP "Location" header.
ProblemDetails	O	0..1	400 Bad Request	(NOTE 2)
ProblemDetailsTmgiAlloc	O	0..1	403 Forbidden	(NOTE 2)
ProblemDetails	O	0..1	404 Not Found	(NOTE 2)
NOTE 1: The mandatory HTTP error status code for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: Failure cases are described in clause 5.20.7.				

Table 5.20.2.2.3.1-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-mbs-session/v1/mbs-sessions/{mbsSessionRef}

5.20.2.2.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.20.2.3 Resource: Individual MBS Session

5.20.2.3.1 Introduction

This resource represents an Individual MBS Session managed by the NEF.

This resource is modelled with the Document resource archetype (see clause C.1 of 3GPP TS 29.501 [3]).

5.20.2.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-mbs-session/v1/mbs-sessions/{mbsSessionRef}

This resource shall support the resource URI variables defined in table 5.20.2.3.2-1.

Table 5.20.2.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.20.1.
mbsSessionRef	string	Contains the identifier of the Individual MBS Session resource assigned by the NEF.

5.20.2.3.3 Resource Standard Methods

5.20.2.3.3.1 PATCH

The HTTP PATCH method enables an AF to request the modification of an existing Individual MBS Session resource at the NEF.

This method shall support the URI query parameters specified in table 5.20.2.3.3.1-1.

Table 5.20.2.3.3.1-1: URI query parameters supported by the PATCH method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.20.2.3.3.1-2 and the response data structures and response codes specified in table 5.20.2.3.3.1-3.

Table 5.20.2.3.3.1-2: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
array(PatchItem)	M	1	Represents the list of modifications to be applied to the concerned existing Individual MBS Session resource, as specified in clause 4.6.1.1.3 of 3GPP TS 29.501 [32].

Table 5.20.2.3.3.1-3: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful response. The Individual MBS Session resource was successfully modified.
MbsSessionUpdateResp	M	1	200 OK	Successful response. The Individual MBS Session was successfully updated and MBS Session update related information shall be returned in the response body.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
ProblemDetails	O	0..1	400 Bad Request	(NOTE 2)
ProblemDetails	O	0..1	403 Forbidden	(NOTE 2)
ProblemDetails	O	0..1	404 Not Found	(NOTE 2)
NOTE 1: The mandatory HTTP error status code for the PATCH method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: Failure cases are described in clause 5.20.7.				

Table 5.20.2.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.20.2.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.20.2.3.3.3 DELETE

This method enables an AF to request the deletion of an Individual MBS Session resource at the NEF.

This method shall support the URI query parameters specified in table 5.20.2.3.3.3-1.

Table 5.20.2.3.3.3-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.20.2.3.3.3-2 and the response data structures and response codes specified in table 5.20.2.3.3.3-3.

Table 5.20.2.3.3.3-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.20.2.3.3.3-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response Codes	Description
n/a			204 No Content	Successful response. The Individual MBS Session resource was successfully deleted.
			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
ProblemDetails	O	0..1	404 Not Found	(NOTE 2)

NOTE 1: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

NOTE 2: Failure cases are described in clause 5.20.7.

Table 5.20.2.3.3.3-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.20.2.3.3-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative NEF.

5.20.2.3.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.20.2.4 Resource: MBS Session Subscriptions

5.20.2.4.1 Introduction

This resource represents the collection of MBS Session Subscriptions managed by the NEF.

This resource is modelled with the Collection resource archetype (see clause C.2 of 3GPP TS 29.501 [3]).

5.20.2.4.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-mbs-session/v1/mbs-sessions/subscriptions**

This resource shall support the resource URI variables defined in table 5.20.2.4.2-1.

Table 5.20.2.4.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.20.1.

5.20.2.4.3 Resource Methods

5.20.2.4.3.1 GET

This method enables an AF to request to retrieve all the MBS Session Subscription resources managed by the NEF.

This method shall support the URI query parameters specified in table 5.20.2.4.3.1-1.

Table 5.20.2.4.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.20.2.4.3.1-2 and the response data structures and response codes specified in table 5.20.2.4.3.1-3.

Table 5.20.2.4.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.20.2.4.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(MbsSessionSubsc)	M	0..N	200 OK	Successful case. All the MBS Session Subscription resources managed by the NEF are returned.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.20.2.4.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

Table 5.20.2.4.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

5.20.2.4.3.2 POST

This method enables an AF to request the creation of an MBS Session Subscription resource at the NEF.

This method shall support the URI query parameters specified in table 5.20.2.4.3.2-1.

Table 5.20.2.4.3.2-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.20.2.4.3.2-2 and the response data structures and response codes specified in table 5.20.2.4.3.2-3.

Table 5.20.2.4.3.2-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
MbsSessionSubsc	M	1	Representation of the MBS session to be created at the NEF.

Table 5.20.2.4.3.2-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MbsSessionSubsc	M	1	201 Created	Successful case. A representation of the created Individual MBS Session Subscription resource is returned. The URI of the created resource is returned in an HTTP "Location" header.
NOTE: The mandatory HTTP error status code for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.20.2.4.3.2-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-mbs-session/v1/mbs-sessions/subscriptions/{subscriptionId}

5.20.2.4.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.20.2.5 Resource: Individual MBS Session Subscription

5.20.2.5.1 Introduction

This resource represents an Individual MBS Session Subscription managed by the NEF.

This resource is modelled with the Document resource archetype (see clause C.2 of 3GPP TS 29.501 [3]).

5.20.2.5.2 Resource Definition

Resource URI: {apiRoot}/3gpp-mbs-session/v1/mbs-sessions/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.20.2.5.2-1.

Table 5.20.2.5.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.20.1.
subscriptionId	string	Identifier of the Individual MBS Session Subscription resource.

5.20.2.5.3 Resource Methods

5.20.2.5.3.1 GET

This method enables an AF to request to retrieve an existing Individual MBS Session Subscription resource at the NEF.

This method shall support the URI query parameters specified in table 5.20.2.5.3.1-1.

Table 5.20.2.5.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.20.2.5.3.1-2 and the response data structures and response codes specified in table 5.20.2.5.3.1-3.

Table 5.20.2.5.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.20.2.5.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MbsSessionSubsc	M	1	200 OK	Successful case. The requested Individual MBS Session Subscription resource is returned.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.20.2.5.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

Table 5.20.2.5.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

5.20.2.5.3.2 DELETE

This method enables an AF to request the deletion of an existing Individual MBS Session Subscription resource at the NEF.

This method shall support the URI query parameters specified in table 5.20.2.5.3.2-1.

Table 5.20.2.5.3.2-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.20.2.5.3.2-2 and the response data structures and response codes specified in table 5.20.2.5.3.2-3.

Table 5.20.2.5.3.2-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.20.2.5.3.2-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case. The concerned Individual MBS Session Subscription resource is successfully deleted.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.20.2.5.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

Table 5.20.2.5.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

5.20.2.5.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.20.2.6 Resource: MBS Parameters Provisionings

5.20.2.6.1 Introduction

This resource represents the collection of MBS Parameters Provisionings managed by the NEF.

This resource is modelled with the Collection resource archetype (see clause C.2 of 3GPP TS 29.501 [3]).

5.20.2.6.2 Resource Definition

Resource URI: `{apiRoot}/3gpp-mbs-session/v1/mbs-pp`

This resource shall support the resource URI variables defined in table 5.20.2.6.2-1.

Table 5.20.2.6.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.20.1.

5.20.2.6.3 Resource Methods

5.20.2.6.3.1 GET

This method enables an AF to request to retrieve all the MBS Parameters Provisionings resources managed by the NEF.

This method shall support the URI query parameters specified in table 5.20.2.6.3.1-1.

Table 5.20.2.6.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.20.2.6.3.1-2 and the response data structures and response codes specified in table 5.20.2.6.3.1-3.

Table 5.20.2.6.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.20.2.6.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(MbsPpData)	M	1..N	200 OK	Successful case. All the Individual MBS Parameters Provisionings resources managed by the NEF are returned.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.20.2.6.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

Table 5.20.2.6.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

5.20.2.6.3.2 POST

This method enables an AF to request the creation of a new MBS Parameters Provisioning at the NEF.

This method shall support the URI query parameters specified in table 5.20.2.6.3.2-1.

Table 5.20.2.6.3.2-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.20.2.6.3.2-2 and the response data structures and response codes specified in table 5.20.2.6.3.2-3.

Table 5.20.2.6.3.2-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
MbsPpData	M	1	Representation of the MBS session to be created in the NEF.

Table 5.20.2.6.3.2-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MbsPpData	M	1	201 Created	Successful case. A representation of the created Individual MBS Parameters Provisioning resource is returned. The URI of the created resource shall be returned in an HTTP "Location" header.
NOTE: The mandatory HTTP error status code for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.20.2.6.3.2-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-mbs-session/v1/mbs-pp/{mbsPpId}

5.20.2.6.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.20.2.7 Resource: Individual MBS Parameters Provisioning

5.20.2.7.1 Introduction

This resource represents an Individual MBS Parameters Provisioning resource managed by the NEF.

This resource is modelled with the Document resource archetype (see clause C.2 of 3GPP TS 29.501 [3]).

5.20.2.7.2 Resource Definition

Resource URI: {apiRoot}/3gpp-mbs-session/v1/mbs-pp/{mbsPpId}

This resource shall support the resource URI variables defined in table 5.20.2.7.2-1.

Table 5.20.2.7.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.20.1.
mbsPpId	string	Identifier of the Individual MBS Parameters Provisioning resource.

5.20.2.7.3 Resource Methods

5.20.2.7.3.1 GET

This method enables an AF to request to retrieve an existing Individual MBS Parameters Provisioning resource managed by the NEF.

This method shall support the URI query parameters specified in table 5.20.2.7.3.1-1.

Table 5.20.2.7.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.20.2.7.3.1-2 and the response data structures and response codes specified in table 5.20.2.7.3.1-3.

Table 5.20.2.7.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.20.2.7.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MbsPpData	M	1	200 OK	Successful case. The requested Individual MBS Parameters Provisioning resource is successfully returned.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.20.2.7.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

Table 5.20.2.7.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

5.20.2.7.3.2 PUT

This method enables an AF to request the update of an existing Individual MBS Parameters Provisioning resource at the NEF.

This method shall support the URI query parameters specified in table 5.20.2.7.3.2-1.

Table 5.20.2.7.3.2-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.20.2.7.3.2-2 and the response data structures and response codes specified in table 5.20.2.7.3.2-3.

Table 5.20.2.7.3.2-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
MbsPpData	M	1	Represents the updated Individual MBS Parameters Provisioning resource representation.

Table 5.20.2.7.3.2-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MbsPpData			200 OK	Successful response. The Individual MBS Parameters Provisioning resource is successfully updated and a representation of the updated resource is returned in the response body.
n/a			204 No Content	Successful response. The Individual MBS Parameters Provisioning resource is successfully updated and no content is to be returned in the response body.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE 1: The mandatory HTTP error status code for the PUT method listed in Table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.20.2.7.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.20.2.7.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.20.2.7.3.3 PATCH

This method enables an AF to request the modification of an existing Individual MBS Parameters Provisioning resource at the NEF.

This method shall support the URI query parameters specified in table 5.20.2.7.3.3-1.

Table 5.20.2.7.3.3-1: URI query parameters supported by the PATCH method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.20.2.7.3.3-2 and the response data structures and response codes specified in table 5.20.2.7.3.3-3.

Table 5.20.2.7.3.3-2: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
MbsPpDataPatch	M	1	Represents the requested modifications to the Individual MBS Parameters Provisioning resource.

Table 5.20.2.7.3.3-3: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MbsPpData			200 OK	Successful response. The Individual MBS Parameters Provisioning resource is successfully modified and a representation of the updated resource is returned in the response body.
n/a			204 No Content	Successful response. The Individual MBS Parameters Provisioning resource is successfully modified and no content is to be returned in the response body.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE 1: The mandatory HTTP error status code for the PATCH method listed in Table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.20.2.7.3.3-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.20.2.7.3.3-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.20.2.7.3.4 DELETE

This method enables an AF to request the deletion of an existing Individual MBS Parameters Provisioning resource at the NEF.

This method shall support the URI query parameters specified in table 5.20.2.7.3.4-1.

Table 5.20.2.7.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.20.2.7.3.4-2 and the response data structures and response codes specified in table 5.20.2.7.3.4-3.

Table 5.20.2.7.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.20.2.7.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case. The concerned Individual MBS Parameters Provisioning resource is successfully deleted.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.20.2.7.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

Table 5.20.2.7.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

5.20.2.7.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.20.3 Custom Operations without associated resources

There are no custom operations without associated resources defined for this API in this release of the specification.

5.20.4 Notifications

5.20.4.1 General

Notifications shall comply to clause 5.2.5 of 3GPP TS 29.122 [4].

Table 5.20.4.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
MBS Session Status Notification	{notificationUri}	POST	Enables to notify a previously subscribed AF on MBS session status information.

5.20.4.2 MBS Session Status Notification

5.20.4.2.1 Description

The MBS Session Status Notification is used by the NEF to report MBS session status information to a subscribed AF.

5.20.4.2.2 Target URI

The Callback URI "{notificationUri}" shall be used with the callback URI variables defined in table 5.20.4.2.2-1.

Table 5.20.4.2.2-1: Callback URI variables

Name	Data type	Definition
notificationUri	Uri	Callback URI provided by the AF during the creation/modification of the subscription.

5.20.4.2.3 Operation Definition

5.20.4.2.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.20.4.2.3.1-1 and the response data structures and response codes specified in table 5.20.4.2.3.1-2.

Table 5.20.4.2.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
MbsSessionStatusNotif	M	1	Represents the MBS Session Status information to be reported to the AF.

Table 5.20.4.2.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The MBS Session Status notification is successfully received.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.20.4.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

Table 5.20.4.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

5.4.2.2.3.2 Notification via Websocket

If supported by both AF and NEF and successfully negotiated, the MBS Session Status Notification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4 of 3GPP TS 29.122 [4].

5.20.5 Data Model

5.20.5.1 General

This clause specifies the application data model supported by the MBSSession API. Table 5.20.5.1-1 specifies the data types defined for the MBSSession API.

Table 5.20.5.1-1: MBSSession specific Data Types

Data type	Clause defined	Description	Applicability
MbsPpData	5.20.5.2.6	Represents MBS Parameters Provisioning data.	
MbsPpDataPatch	5.20.5.2.8	Represents the requested modification to existing MBS Parameters Provisioning data.	
MbsSessAuthData	5.20.5.2.7	Represents the MBS Session Authorization data.	
MbsSessionCreateReq	5.20.5.2.2	Represents the parameters to request MBS Session creation.	
MbsSessionCreateResp	5.20.5.2.3	Represents the parameters to be returned in an MBS Session creation response.	
MbsSessionSubsc	5.20.5.2.4	Represents an MBS Session Subscription.	
MbsSessionStatusNotif	5.20.5.2.5	Represents an MBS Session Status notification.	
MbsSessionUpdateResp	5.20.5.2.9	Represents MBS Session update related information.	ReducedMbsServArea

Table 5.20.5.1-2 specifies data types re-used by the MBSSession API from other specifications, including a reference to their respective specifications, and when needed, a short description of their use within the MBSSession API.

Table 5.20.5.1-2: Re-used Data Types

Data type	Reference	Comments	Applicability
5MbsAuthorizationInfo	3GPP TS 29.503 [17]	Contains the MBS Session authorization information.	
DateTime	3GPP TS 29.122 [4]	Represents a date and a time	
ExternalGroupId	3GPP TS 29.122 [4]	Represents the External Group Identifier for a user group.	
ExternalMbsServiceArea	3GPP TS 29.571 [8]	Represents an external MBS service area.	
Gpsi	3GPP TS 29.571 [8]	Represents a GPSI.	
MbsServiceArea	3GPP TS 29.571 [8]	Represents an MBS service area.	
MbsSession	3GPP TS 29.571 [8]	Represents MBS session information.	
MbsSessionId	3GPP TS 29.571 [8]	Represents the identifier of an MBS Session.	
MbsSessionEventReportList	3GPP TS 29.571 [8]	Represents the list of MBS Session Event Report(a).	
MbsSessionSubscription	3GPP TS 29.571 [8]	Represents an MBS Session Subscription	
PatchItem	3GPP TS 29.571 [8]	Represents the requested modifications to a resource via the PATCH method.	
ProblemDetailsTmgiAlloc	5.19.5.4.1	Represents an extension to the ProblemDetails data structure with additional information.	
SupportedFeatures	3GPP TS 29.571 [8]	Represents the list of supported feature(s) and used to negotiate the applicability of the optional features.	
Tmgi	3GPP TS 29.571 [8]	Represents a TMGI.	
TunnelAddress	3GPP TS 29.571 [8]	Represents a Tunnel Address (UDP/IP).	
Uri	3GPP TS 29.122 [4]	Represents a URI.	

5.20.5.2 Structured data types

5.20.5.2.1 Introduction

This clause defines the structures to be used in resource representations.

5.20.5.2.2 Type: MbsSessionCreateReq

Table 5.20.5.2.2-1: Definition of type MbsSessionCreateReq

Attribute name	Data type	P	Cardinality	Description	Applicability
afId	string	M	1	Contains the identifier of the AF that is sending the request.	
mbsSession	MbsSession	M	1	MBS session to be created.	
supFeat	SupportedFeatures	C	0..1	Contains the list of supported features. This attribute shall be provided in the HTTP POST request to create a new MBS session, if feature negotiation needs to take place.	

5.20.5.2.3 Type: MbsSessionCreateRsp

Table 5.20.5.2.3-1: Definition of type CreateRspData

Attribute name	Data type	P	Cardinality	Description	Applicability
mbsSession	MbsSession	M	1	Represents the created MBS session.	
eventList	MbsSessionEventReportList	C	0..1	Contains a list of MBS Session Status Event(s) report(s), if available.	
supFeat	SupportedFeatures	C	0..1	Contains the list of supported features. This attribute shall be provided in the HTTP POST response to a request to create a new MBS session, if it was present in the corresponding HTTP POST request.	

5.20.5.2.4 Type: MbsSessionSubsc

Table 5.20.5.2.4-1: Definition of type MbsSessionSubsc

Attribute name	Data type	P	Cardinality	Description	Applicability
afId	string	M	1	Contains the identifier of the AF that is sending the request.	
subscription	MbsSessionSubscription	M	1	Represents the parameters of the MBS Session Status subscription to be created	
subscriptionId	string	C	0..1	Contains the identifier of the created Individual MBS Session Subscription resource. This attribute shall only be present in the HTTP POST response to an MBS session creation request.	

5.20.5.2.5 Type: MbsSessionStatusNotif

Table 5.20.5.2.5-1: Definition of type MbsSessionStatusNotif

Attribute name	Data type	P	Cardinality	Description	Applicability
eventList	MbsSessionEventReportList	M	1	Contains the reported MBS session event(s) and the related information.	

5.20.5.2.6 Type: MbsPpData

Table 5.20.5.2.6-1: Definition of type MbsPpData

Attribute name	Data type	P	Cardinality	Description	Applicability
afId	string	M	1	Contains the identifier of the AF that is sending the request.	
mbsSessAuthData	MbsSessAuthData	C	0..1	Contains the MBS Session Authorization data that the AF requests to provision. This attribute shall be present when the AF request to provision MBS Session Authorization data.	
supFeat	SupportedFeatures	C	0..1	Contains the list of supported features among the ones defined in clause 5.20.6. This attribute shall be provided when feature negotiation needs to take place.	

5.20.5.2.7 Type: MbsSessAuthData

Table 5.20.5.2.7-1: Definition of type MbsSessAuthData

Attribute name	Data type	P	Cardinality	Description	Applicability
extGroupId	ExternalGroupId	M	1	Represents the external group identifier of the targeted multicast MBS Group.	
gpsisList	map(Gpsi)	C	1..N	Represents the list of the Gpsi(s) of the member UE(s) constituting the multicast MBS group. Any value of type string can be used as a key of the map. This attribute shall be present only if the multicast MBS group has not yet been created or the list of its member(s) needs to be updated.	
mbsSessionIdList	5MbsAuthorizationInfo	M	1	Contains the identifier(s) of the multicast MBS Session(s) that the multicast MBS group is authorized to join.	

5.20.5.2.8 Type: MbsPpDataPatch

Table 5.20.5.2.8-1: Definition of type MbsPpDataPatch

Attribute name	Data type	P	Cardinality	Description	Applicability
mbsSessAuthData	MbsSessAuthData	O	0..1	Contains the modified MBS Session Authorization data that the AF requests to provision.	
supFeat	SupportedFeatures	O	0..1	Contains the modified list of supported features among the ones defined in clause 5.20.6.	

5.20.5.2.9 Type: MbsSessionUpdateResp

Table 5.20.5.2.9-1: Definition of type MbsSessionUpdateResp

Attribute name	Data type	P	Cardinality	Description	Applicability
reducedMbsServiceArea	MbsServiceArea	C	0..1	<p>This attribute shall be present only if the requested MBS Service Area cannot be covered by the MB-SMF Service Area of a single MB-SMF, and the MB-SMF reduced the MBS Service Area accordingly.</p> <p>When present, it shall contain the reduced MBS Service Area in which the MBS session has been updated.</p> <p>(NOTE)</p>	
reducedExtMbsServiceArea	ExternalMbsServiceArea	C	0..1	<p>This attribute shall be present only if the requested MBS Service Area cannot be covered by the MB-SMF Service Area of a single MB-SMF, and the MB-SMF reduced the MBS Service Area accordingly.</p> <p>When present, it shall contain the reduced external MBS Service Area in which the MBS session has been updated.</p> <p>(NOTE)</p>	
NOTE: These attributes are mutually exclusive. Either one of them may be present.					

5.20.5.3 Simple data types and enumerations

5.20.5.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.20.5.3.2 Simple data types

The simple data types defined in table 5.20.5.3.2-1 shall be supported.

Table 5.20.5.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.20.6 Used Features

The table below defines the features applicable to the MBSSession API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.20.6-1: Supported Features

Feature number	Feature Name	Description
1	ReducedMbsServiceArea	<p>This feature indicates the support of the MBS Service Area reduction functionality.</p> <p>The following sub-functionalities are supported:</p> <ul style="list-style-type: none"> - Support to return the reduced MBS Service Area in an MBS Session creation/update response.

5.20.7 Error handling

5.20.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.20.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MBSSession API.

5.20.7.3 Application Errors

The application errors defined for the MBSSession API are listed in table 5.20.7.3-1.

Table 5.20.7.3-1: Application errors

Application Error	HTTP status code	Description
INVALID_MBS_SERVICE_INFO	400 Bad Request	The provided MBS Service Information is invalid (e.g. invalid QoS reference), incorrect or insufficient to perform MBS policy authorization.
FILTER_RESTRICTIONS_NOT_OBSERVED	400 Bad Request	The MBS IP flow(s) description provided within the MBS Service Information cannot be handled due to the restrictions defined in clause 5.3.8 of 3GPP TS 29.214 [64] not being observed.
MBS_SERVICE_AREA_TOO_LARGE	403 Forbidden	Indicates that the MBS Session creation request is rejected because the provided MBS Service Area cannot be supported by the network as it is too large to be served by a single MB-SMF.
MBS_SERVICE_INFO_NOT_AUTHORIZED	403 Forbidden	The provided MBS Service Information is rejected.
MBS_SESSION_ALREADY_CREATED	403 Forbidden	The requested MBS session has already been created at the NEF/MB-SMF.
OVERLAPPING_MBS_SERVICE_AREA	403 Forbidden	The provided MBS service area overlaps with the MBS service area of an existing MBS Session that shares the same MBS session Identifier.
UNKNOWN_TMGI	404 Not Found	The TMGI provided in the request does not exist.
MBS_SESSION_CONTEXT_NOT_FOUND	404 Not Found	The targeted Individual MBS Session does not exist.
UNKNOWN_MBS_SERVICE_AREA	404 Not Found	The requested MBS service area (e.g. identified by the Area Session ID) cannot be found.

5.21 EASDeployment API

5.21.1 Resources

5.21.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-eas-deployment/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-eas-deployment" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.21.1.1-1 and the resources and HTTP methods used for AF provisioned EAS Deployment information management in the northbound EASDeployment API.

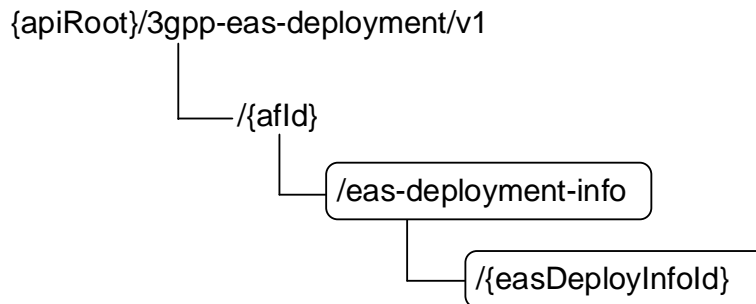


Figure 5.21.1.1-1: Resource URI structure of the northbound EASDeployment API

Table 5.21.1.1-1 provides an overview of the resources and HTTP methods applicable for the northbound EASDeployment API.

Table 5.21.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
EAS Deployment Information	/{afId}/eas-deployment-info	GET	Read all EAS Deployment information for a given AF.
		POST	Create a new Individual EAS Deployment information resource.
Individual EAS Deployment Information	/{afId}/eas-deployment-info/{easDeployInfoId}	GET	Reads an active Individual EAS Deployment Information resource.
		PUT	Update an existing Individual EAS Deployment Information resource.
		DELETE	Deletes an existing Individual EAS Deployment Information resource.

5.21.1.2 Resource: EAS Deployment Information

5.21.1.2.1 Introduction

This resource allows an AF to request the creation of a new Individual EAS Deployment Information resource.

5.21.1.2.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-eas-deployment/v1/{afId}/eas-deployment-info**

This resource shall support the resource URI variables defined in table 5.21.1.2.2-1.

Table 5.21.1.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.

5.21.1.2.3 Resource Methods

5.21.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.21.1.2.2.

5.21.1.2.3.2 GET

The GET method allows to read all active EAS Deployment information for a given AF and subscription. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.21.1.2.3.2-1.

Table 5.21.1.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.21.1.2.3.2-2, the response data structures and response codes specified in table 5.21.1.2.3.2-3, and the location headers specified in table 5.21.1.2.3.2-4 and table 5.21.1.2.3.2-5.

Table 5.21.1.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.21.1.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(EasDeploymentInfo)	M	0..N	200 OK	The configuration information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during EAS deployment information retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during EAS deployment information retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.21.1.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.21.1.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.21.1.2.3.3 POST

The POST method creates a new resource of Individual EAS Deployment Information for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.21.1.2.3.3-1, the response data structures and response codes specified in table 5.21.1.2.3.3-2, and the Location Headers specified in table 5.21.1.2.3.3-3.

Table 5.21.1.2.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
EasDeployInfo	M	1	EAS Deployment Information, indicates how edge services are deployed in each Local DN.

Table 5.21.1.2.3.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
EasDeployInfo	M	1	201 Created	The Individual EAS Deployment Information resource was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.21.1.2.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-eas-deployment/v1/{afId}/eas-deployment-info/{easDeployInfoId}

5.21.1.3 Resource: Individual EAS Deployment Information

5.21.1.3.1 Introduction

This resource allows an AF to read, update or delete an existing Individual EAS Deployment Information.

5.21.1.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-eas-deployment/v1/{afId}/eas-deployment-info/{easDeployInfoId}

This resource shall support the resource URI variables defined in table 5.21.1.3.2-1.

Table 5.21.1.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	string	Identifier of the AF.
easDeployInfold	string	Identifier of the EAS Deployment Information formatted according to IETF RFC 3986 [44].

5.21.1.3.3 Resource Methods

5.21.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.21.1.3.2.

5.21.1.3.3.2 GET

The GET method allows to read the existing EAS Deployment Information for a given AF and a given EAS Deployment Information Id. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.21.1.3.3.2-1.

Table 5.21.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.21.1.3.3.2-2, the response data structures and response codes specified in table 5.21.1.3.3.2-3, and the Location Headers specified in table 5.21.1.3.3.2-4 and table 5.21.1.3.3.2-5.

Table 5.21.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.21.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
EasDeployInfo	M	1	200 OK	Successful case. The exposure information of an existing Individual EAS Deployment Information in the request URI is returned.
N/A			307 Temporary Redirect	Temporary redirection, during the EAS Deployment Information retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during the EAS Deployment Information retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.21.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.21.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.21.1.3.3.3 PUT

The PUT method is used to modify an existing Individual EAS Deployment Information resource. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.21.1.3.3.3-1.

Table 5.21.1.3.3.3-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.21.1.3.3.3-2, the response data structures and response codes specified in table 5.21.1.3.3.3-3, and the Location Headers specified in table 5.21.1.3.3.3-4 and table 5.21.1.3.3.3-5.

Table 5.21.1.3.3.3-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
EasDeployInfo	M	1	Modify the Individual EAS Deployment Information resource.

Table 5.21.1.3.3.3-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
EasDeployInfo	M	1	200 OK	Successful case. The exposure information of the updated EAS Deployment Information.
N/A			204 No Content	The EAS Deployment change was updated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during the EAS Deployment Information modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during the EAS Deployment Information modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.21.1.3.3.3-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.21.1.3.3.3-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative NEF.

5.21.1.3.3.4 DELETE

The DELETE method deletes an existing Individual EAS Deployment Information resource. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.21.1.3.3.4-1.

Table 5.21.1.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.21.1.3.3.4-2, the response data structures and response codes specified in table 5.21.1.3.3.4-3, and the Location Headers specified in table 5.21.1.3.3.4-4 and table 5.21.1.3.3.4-5.

Table 5.21.1.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.21.1.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The Individual EAS Deployment Information resource was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during the termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during the termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.21.1.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.21.1.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.21.2 Custom Operations without associated resources

5.21.2.1 Overview

The structure of the custom operation URIs of the Nnef_EASDeployment service is shown in Figure 5.21.2.1-1.

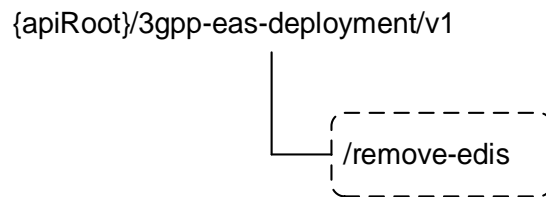


Figure 5.21.2.1-1: Custom operation URI structure of the Nnef_EASDeployment API

Table 5.21.2.1-1 provides an overview of the custom operations and applicable HTTP methods.

Table 5.21.2.1-1: Custom operations without associated resources

Custom operation URI	Mapped HTTP method	Description
<code>{apiRoot}/3gpp-eas-deployment/<apiVersion>/remove-edis</code>	POST	Request the NEF to delete EAS Deployment Information based on given attributes.

5.21.2.2 Operation: remove-edis

5.21.2.2.1 Description

The operation is used by the NF service consumer to delete EAS Deployment Information based on given attributes.

5.21.2.2.2 Operation Definition

This operation shall support the request data structures shown in Table 5.21.2.2.2-1 and the response data structures and error codes specified in Table 5.21.2.2.2-2.

Table 5.21.2.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
EdiDeleteCriteria	M	1	Information about the criteria to be used for EAS Deployment Information deletion.

Table 5.21.2.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful request to remove EAS Deployment Information based on given criteria.

NOTE: The mandatory HTTP error status codes for the POST method listed in Table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

5.21.3 Notifications

None.

5.21.4 Data Model

5.21.4.1 General

This clause specifies the application data model supported by the EASDeployment API. Table 5.21.4.1-1 specifies the data types defined for the EASDeployment API.

Table 5.21.4.1-1: EASDeployment API specific Data Types

Data type	Clause defined	Description	Applicability
EasDeployInfo	5.21.4.3.2	EAS Deployment Information, indicates how edge services are deployed in each Local DN.	
EdiDeleteCriteria	5.21.4.3.5	Contains criteria for deleting EAS Deployment Information.	
DnailInformation	5.21.4.3.3	list of DNS server identifier and/or IP address(s) of the EAS in the local DN for the DNAI.	
DnsServerIdentifier	5.21.4.3.4	DNS server identifier (consisting of IP address and port).	

5.21.4.2 Reused data types

The data types reused by the EASDeployment API from other specifications are listed in table 5.21.4.2-1.

Table 5.21.4.2-1: Re-used Data Types

Data type	Reference	Comments
Afld	5.14.5.4.2	Represents an AF identifier.
Dnai	3GPP TS 29.571 [8]	Identifies a DNAI.
Dnn	3GPP TS 29.571 [8]	Identifies a DNN.
DnnSnssaiInformation	5.18.3.3.5	Contains DNN and S-NSSAI information.
ExternalGroupId	3GPP TS 29.122 [4]	External Group Identifier for a user group.
FqdnPatternMatchingRule	3GPP TS 29.571 [8]	Identifies the FQDN pattern matching rule.
IpAddr	3GPP TS 29.571 [8]	IP Address.
Snssai	3GPP TS 29.571 [8]	Identifies the S-NSSAI.
UInteger	3GPP TS 29.571 [8]	Unsigned integer.
Link	3GPP TS 29.122 [4]	Identifies a referenced resource.

5.21.4.3 Structured data types

5.21.4.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.21.4.3.2 Type: EasDeployInfo

Table 5.21.4.3.2-1: Definition of type EasDeployInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
self	Link	C	0..1	Identifies the individual EAS Deployment information resource. Shall be present in the HTTP GET response when reading all the configurations for an AF.	
afServiceId	string	O	0..1	Identifies a service on behalf of which the AF is issuing the request.	
fqdnPatternList	array(FqdnPatternMatchingRule)	M	1..N	Supported FQDN pattern(s) for application(s) deployed in the Local part of the DN where each FQDN pattern is described by a FQDN Pattern Matching Rule.	
appld	string	O	0..1	Identifies the application for which the EAS Deployment Information corresponds to.	
dnn	Dnn	O	0..1	DNN for the EAS Deployment Information.	
snssai	Snssai	O	0..1	S-NSSAI for the EAS Deployment Information.	
exterGroupId	ExternalGroupId	O	0..1	External Group ID for the EAS Deployment Information.	
dnailInfos	map(DnailInformation)	O	1..N	list of DNS server identifier (consisting of IP address and port) and/or IP address(s) of the EAS in the local DN for each DNAI. The key of map is the DNAI.	

5.21.4.3.3 Type: DnailInformation

Table 5.21.4.3.3-1: Definition of type DnailInformation

Attribute name	Data type	P	Cardinality	Description	Applicability
dnai	Dnai	M	1	Identifier the DNAI.	
dnsServIds	array(DnsServerIdentifier)	C	1..N	list of DNS server identifier (consisting of IP address and port) for each DNAI.	
easIpAddrs	array(IpAddr)	C	1..N	IP address(s) of the EASs in the local DN for each DNAI.	

NOTE: At least one of the "dnsServIds" or "easIpAddrs" attribute shall be provided.

5.21.4.3.4 Type: DnsServerIdentifier

Table 5.21.4.3.4-1: Definition of type DnsServerIdentifier

Attribute name	Data type	P	Cardinality	Description	Applicability
dnsServIpAddr	IpAddr	M	1	DNS server IP address.	
portNumber	UInteger	M	1	DNS port number.	

5.21.4.3.5 Type: EdiDeleteCriteria

Table 5.21.4.3.5-1: Definition of type EdiDeleteCriteria

Attribute name	Data type	P	Cardinality	Description	Applicability
afld	Afld	C	0..1	AF identifier to be used as deletion criterion. (NOTE)	
dnnSnssai	DnnSnssaiInformation	C	0..1	DNN and S-NSSAI information to be used as deletion criterion. (NOTE)	

NOTE: At least one of those attributes shall be provided.

5.21.4.4 Simple data types and enumerations

5.21.4.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.21.4.4.2 Simple data types

The simple data types defined in table 5.21.4.4.2-1 shall be supported.

Table 5.21.4.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.21.5 Used Features

The table below defines the features applicable to the EASDeployment API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.21.5-1: Features used by EASDeployment API

Feature number	Feature Name	Description

5.21.6 Error handling

5.21.6.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.21.6.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the EASDeployment API.

5.21.6.3 Application Errors

The application errors defined for EASDeployment API are listed in table 5.21.6.3-1.

Table 5.21.6.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

5.22 ASTI API

5.22.1 Resources

5.22.1.1 Overview

All resource URIs of this API should have the following root:

{apiRoot}/3gpp-asti/v1

"apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4]. "apiName" shall be set to "3gpp-asti" and "apiVersion" shall be set to "v1" for the current version defined in the present document. All resource URIs in the clauses below are defined relative to the above root URI.

This clause describes the structure for the Resource URIs as shown in figure 5.22.1.1-1 and the resources and HTTP methods used for the ASTI API.

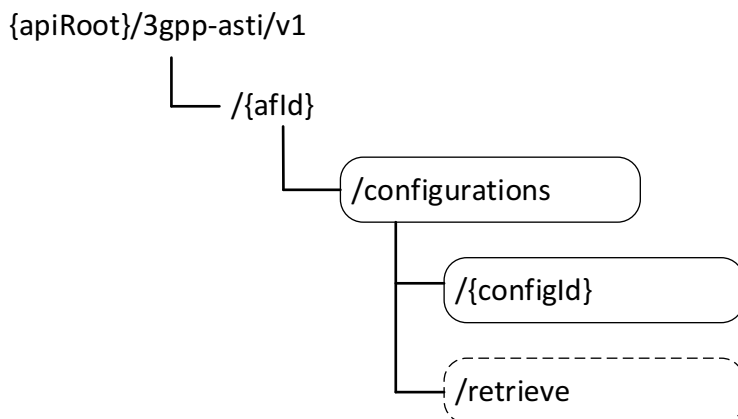


Figure 5.22.1.1-1: Resource URI structure of the ASTI API

Table 5.22.1.1-1 provides an overview of the resources and HTTP methods applicable for the ASTI API.

Table 5.22.1.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method	Description
ASTI Configurations	/{afld}/configurations	GET	Read all configurations of 5G access stratum time distribution for a given AF and subscription.
		POST	Create a new configuration of 5G access stratum time distribution.
	/{afld}/configurations/retrieve	retrieve (POST)	Retrieval of the status of access stratum time distribution.
Individual ASTI Configuration	/{afld}/configurations/{configId}	PUT	Modify a configuration configuration of 5G access stratum time distribution.
		DELETE	Delete a configuration of 5G access stratum time distribution.
		GET	Query the status of the access time distribution

5.22.1.2 Resource: ASTI Configurations

5.22.1.2.1 Introduction

This resource allows an AF to read all active configurations of 5G access stratum time distribution for a given AF, or allows an AF to create a new new configuration of 5G access stratum time distribution.

5.22.1.2.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-asti/v1/{afld}/configurations**

This resource shall support the resource URI variables defined in table 5.22.1.2.2-1.

Table 5.22.1.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afld	string	Identifier of the AF.

5.22.1.2.3 Resource Methods

5.22.1.2.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.22.1.2.2.

5.22.1.2.3.2 GET

The GET method allows to read all active configurations of 5G access stratum time distribution for a given AF and subscription. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.22.1.2.3.2-1.

Table 5.22.1.2.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.22.1.2.3.2-2 and the response data structures and response codes specified in table 5.22.1.2.3.2-3.

Table 5.22.1.2.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.22.1.2.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(AccessTimeDistributionData)	M	0..N	200 OK	The configuration information for the AF are returned.
N/A			307 Temporary Redirect	Temporary redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.22.1.2.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.22.1.2.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.22.1.2.3.3 POST

The POST method creates a new configuration of 5G access stratum time distribution for a given AF. The AF shall initiate the HTTP POST request message and the NEF shall respond to the message. The NEF shall construct the URI of the created resource.

This method shall support the request data structures specified in table 5.22.1.2.3.3-1 and the response data structures and response codes specified in table 5.22.1.2.3.3-2.

Table 5.22.1.2.3.3-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AccessTimeDistributionData	M	1	Parameters to create a configuration of 5G access stratum time distribution.

Table 5.22.1.2.3.3-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AccessTimeDistributionData	M	1	201 Created	The configuration was created successfully. The URI of the created resource shall be returned in the "Location" HTTP header.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.22.1.2.3.3-3: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-asti/v1/{afId}/configurations/{configId}

5.22.1.2.4 Resource Custom Operations

5.22.1.2.4.1 Overview

Table 5.22.1.2.4.1-1: Custom operations

Operation Name	Custom operation URI	Mapped HTTP method	Description
retrieve	/configurations/retrieve	retrieve (POST)	Request the status of the 5G access stratum time distribution for a list of UEs.

5.22.1.2.4.2 Operation: retrieve

5.22.1.2.4.2.1 Description

This custom operation retrieves the status of the access stratum time distribution for a list of UEs.

5.22.1.2.4.2.2 Operation Definition

This operation shall support the request data structures specified in table 5.22.1.2.4.2.2-1 and the response data structure and response codes specified in table 5.22.1.2.4.2.2-2.

Table 5.22.1.2.4.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
StatusRequestData	M	1	Parameters to be sent by the NF service consumer when the status of the 5G access stratum time distribution for a list of UEs is requested.

Table 5.22.1.2.4.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
StatusResponseData	M	1	200 OK	Status of the 5G access stratum time distribution for a list of UEs is returned.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

5.22.1.3 Resource: Individual ASTI Configuration

5.22.1.3.1 Introduction

This resource allows an AF to read/modify/cancel a configuration of 5G access stratum time distribution with the NEF.

5.22.1.3.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-asti/v1/{afId}/configurations/{configId}**

This resource shall support the resource URI variables defined in table 5.22.1.3.2-1.

Table 5.22.1.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	Clause 5.2.4 of 3GPP TS 29.122 [4].
afId	string	Identifier of the AF.
configId	string	Identifier of the configuration resource.

5.22.1.3.3 Resource Methods

5.22.1.3.3.1 General

The following clauses specify the resource methods supported by the resource as described in clause 5.22.1.3.2.

5.22.1.3.3.2 GET

The GET method allows to read the active configuration for a given AF and configuration Id. The AF shall initiate the HTTP GET request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.22.1.3.3.2-1.

Table 5.22.1.3.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.22.1.3.3.2-2 and the response data structures and response codes specified in table 5.22.1.3.3.2-3.

Table 5.22.1.3.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.22.1.3.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AccessTimeDistributionData	M	1	200 OK	The configuration information for the AF in the request URI are returned.
N/A			307 Temporary Redirect	Temporary redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

N/A			308 Permanent Redirect	Permanent redirection, during configuration retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.22.1.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.22.1.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.22.1.3.3.3 PUT

The PUT method modifies an existing configuration resource to update a configuration. The AF shall initiate the HTTP PUT request message and the NEF shall respond to the message.

This method shall support the request data structures specified in table 5.22.1.3.3.3-1 and the response data structures and response codes specified in table 5.22.1.3.3.3-2.

Table 5.22.1.3.3.3-1: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
AccessTimeDistributionData	M	1	Modify an existing configuration of 5G access stratum time distribution.

Table 5.22.1.3.3.3-2: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AccessTimeDistributionData	M	1	200 OK	The configuration was updated successfully.
N/A			204 No Content	The configuration was updated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during configuration modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during configuration modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.22.1.3.3.3-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.22.1.3.3.3-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.22.1.3.3.4 DELETE

The DELETE method deletes the configuration of 5G access stratum time distribution for a given AF. The AF shall initiate the HTTP DELETE request message and the NEF shall respond to the message.

This method shall support the URI query parameters specified in table 5.22.1.3.3.4-1.

Table 5.22.1.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
N/A				

This method shall support the request data structures specified in table 5.22.1.3.3.4-2 and the response data structures and response codes specified in table 5.22.1.3.3.4-3.

Table 5.22.1.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
N/A			

Table 5.22.1.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The configuration was terminated successfully.
N/A			307 Temporary Redirect	Temporary redirection, during configuration termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection, during configuration termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.22.1.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.22.1.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.22.2 Custom Operations without associated resources

None.

5.22.3 Notifications

None.

5.22.4 Data Model

5.22.4.1 General

This clause specifies the application data model supported by the ASTI API.

Table 5.22.4.1-1 specifies the data types defined for the ASTI API.

Table 5.22.4.1-1: ASTI API specific Data Types

Data type	Clause defined	Description	Applicability
AccessTimeDistributionData	5.22.4.3.2	Contains the parameters for the creation of 5G access stratum time distribution configuration.	
ActiveUe	5.22.4.3.5	Contains the UE identifier whose status of the access stratum time distribution is active and the optional requested time synchronization error budget.	
StatusRequestData	5.22.4.3.3	Contains the parameters for retrieval of the status of the access stratum time distribution for a list of UEs.	
StatusResponseData	5.22.4.3.4	Contains the parameters for the status of the access stratum time distribution for a list of UEs.	

5.22.4.2 Reused data types

The data types reused by the TimeSyncExposure API from other specifications are listed in table 5.22.4.2-1.

Table 5.22.4.2-1: Re-used Data Types

Data type	Reference	Comments
AsTimeDistributionParam	3GPP TS 29.565 [50]	Contains the 5G access stratum time distribution parameters.
ExternalGroupId	3GPP TS 29.122 [4]	External Group Identifier for a user group.
Gpsi	3GPP TS 29.571 [8]	Identifies a GPSI.
SupportedFeatures	3GPP TS 29.571 [8]	Used to negotiate the applicability of the optional features defined in table 5.22.5-1.

5.22.4.3 Structured data types

5.22.4.3.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.22.4.3.2 Type: AccessTimeDistributionData

Table 5.22.4.3.2-1: Definition of type AccessTimeDistributionData

Attribute name	Data type	P	Cardinality	Description	Applicability
gpsis	array(Gpsi)	C	1..N	Identifies a list of UE(s). (NOTE)	
exterGroupI d	ExternalGroupI d	C	0.1	Represents a group of users. (NOTE)	
asTimeDisParam	AsTimeDistrib utionParam	M	1	5G access stratum time distribution parameters	
suppFeat	SupportedFeatu res	C	0..1	Represents the features supported by the NF service consumer. This parameter shall be supplied by the NF service consumer in the POST request and the response that requested the creation of an Individual ASTI Configuration resource.	
NOTE: One of "gpsis" or "exterGroupI" attribute shall be provided.					

5.22.4.3.3 Type: StatusRequestData

Table 5.22.4.3.3-1: Definition of type StatusRequestData

Attribute name	Data type	P	Cardinality	Description	Applicability
gpsis	array(Gpsi)	M	1..N	Identifies a list of UE(s).	

5.22.4.3.4 Type: StatusResponseData

Table 5.22.4.3.4-1: Definition of type StatusResponseData

Attribute name	Data type	P	Cardinality	Description	Applicability
inactiveUes	array(Gpsi)	O	1..N	Indicate the UE(s) whose status of the access stratum time distribution is inactive.	
activeUes	array(ActiveUe)	O	1..N	Contains the UE identifier(s) whose status of the access stratum time distribution is active and the optional requested time synchronization error budget.	

5.22.4.3.5 Type: ActiveUe

Table 5.22.4.3.5-1: Definition of type ActiveUe

Attribute name	Data type	P	Cardinality	Description	Applicability
gpsi	Gpsi	M	1	Indicate the UE whose status of the access stratum time distribution is active.	
timeSyncErrBdgt	UInteger	O	0..1	Indicates the time synchronization error budget in terms of time units of nanoseconds.	

5.22.4.4 Simple data types and enumerations

5.22.4.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.22.4.4.2 Simple data types

The simple data types defined in table 5.22.4.4.2-1 shall be supported.

Table 5.22.4.4.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.22.5 Used Features

The table below defines the features applicable to the ASTI API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.22.5-1: Features used by ASTI API

Feature number	Feature Name	Description

5.22.6 Error handling

5.22.6.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.22.6.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the ASTI API.

5.22.6.3 Application Errors

The application errors defined for the ASTI API are listed in table 5.22.6.3-1.

Table 5.22.6.3-1: Application errors

Application Error	HTTP status code	Description

5.23 DataReporting API

5.23.1 Introduction

The Nnef_DataReporting service shall use the DataReporting API.

The API URI of DataReporting API shall be:

{apiRoot}/<apiName>/<apiVersion>

The request URIs used in HTTP requests shall have the Resource URI structure defined in clause 5.2.4 of 3GPP TS 29.122 [2], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificSuffixes>

with the following components:

- "apiRoot" is set as defined in clause 5.2.4 of 3GPP TS 29.122 [4].
- "apiName" shall be set to "3gpp-data-reporting".
- "apiVersion" shall be set to "v1" for the current version defined in the present document.

All resource URIs in the clauses below are defined relative to the above API URI.

5.23.2 Resources

This clause describes the structure for the Resource URIs as shown in Figure 5.23.2-1 and the resources and HTTP methods used for the DataReporting API.

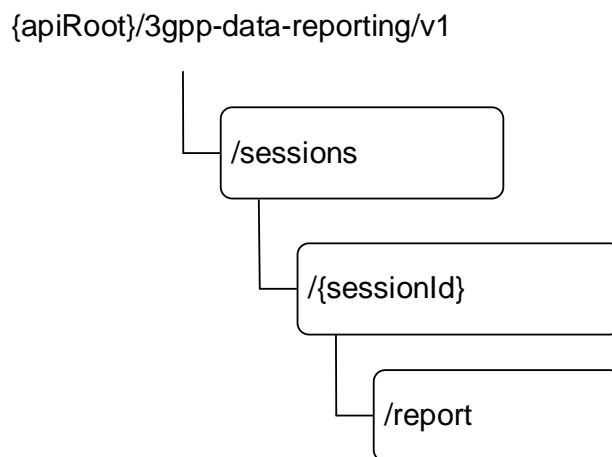


Figure 5.23.2-1: Resource URI structure of the DataReporting API

Table 5.23.2-1 provides an overview of the resources and applicable HTTP methods.

Table 5.23.2-1: Resources and methods overview

Resource name	Resource URI (relative path under API URI)	HTTP method or custom operation	Description (service operation)
Data Reporting Sessions	/sessions	POST	Create a Data Reporting Session
Individual Data Reporting Session	/sessions/{sessionId}	GET	Retrieve an existing Individual Data Reporting Session resource.
		PUT	Update an Individual existing Data Reporting Session resource.
		DELETE	Delete an existing Individual Data Reporting Session resource.
		report (POST)	Report data.

5.23.2.2 Resource: Data Reporting Sessions

5.23.2.2.1 Introduction

This resource represents the collection of Data Reporting Sessions managed by the NEF.

This resource is modelled with the Collection resource archetype (see clause C.2 of 3GPP TS 29.501 [3]).

5.23.2.2.2 Resource definition

Resource URL: **{apiRoot}/3gpp-data-reporting/v1/sessions**

This resource shall support the resource URL variables defined in table 5.23.2.2.2-1.

Table 5.23.2.2.2-1: Resource URL variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.213.1.

5.23.2.2.3 Resource Methods

5.23.2.2.3.1 POST

This method enables an AF to request the creation of a Data Reporting Session at the NEF.

This method shall support the URI query parameters specified in table 5.23.2.2.3.1-1.

Table 5.23.2.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.23.2.2.3.1-2 and the response data structures and response codes specified in table 5.23.2.2.3.1-4.

Table 5.23.2.2.3.1-2: Data structures supported by the POST request body on this resource

Data type	P	Cardinality	Description
DataReportingSession (NOTE)	M	1	Representation of the Data Reporting Session to be created in the NEF.
NOTE: The "sessionId" attribute of the DataReportingSession data type shall not be provided as it is not applicable.			

Table 5.23.2.2.3.1-3: Data structures supported by the POST response body on this resource

Data type	P	Cardinality	Response codes	Description
DataReportingSession (NOTE 2)	M	1	201 Created	Successful case. A representation of the created Individual Data Reporting Session resource is returned. The URI of the created resource shall be returned in an HTTP "Location" header.
NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: The "sessionId" attribute of the DataReportingSession data type shall not be provided as it is not applicable.				

Table 5.23.2.2.3.1-4: Headers supported by the 201 response code on this resource

HTTP response header	Data type	P	Cardinality	Description
Location	string	M	1	The URI of the newly created resource, according to the structure: {apiRoot}/3gpp-data-reporting/v1/sessions/{sessionId}

5.23.2.3 Resource: Individual Data Reporting Session

5.23.2.3.1 Introduction

This resource represents an Individual Data Reporting Session managed by the NEF.

This resource is modelled with the Document resource archetype (see clause C.1 of 3GPP TS 29.501 [3]).

5.23.2.3.2 Resource Definition

Resource URL: {apiRoot}/3gpp-data-reporting/v1/sessions/{sessionId}

This resource shall support the resource URI variables defined in table 5.23.2.3.2-1.

Table 5.23.2.3.2-1: Resource URL variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.23.1
sessionId	string	Represents the identifier of the Individual Data Reporting Sessions resource.

5.23.2.3.3 Resource standard methods

5.23.2.3.3.1 GET

This method enables an AF to retrieve an existing Individual Data Reporting Session resource at the NEF.

This method shall support the URI query parameters specified in table 5.23.2.3.3.1-1.

Table 5.23.2.3.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.23.2.3.3.1-2 and the response data structures and response codes specified in table 5.23.2.3.3.1-3.

Table 5.23.2.3.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.23.2.3.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
DataReportingSession	M	1	200 OK	Successful case. The requested Individual Data Reporting Session resource is returned to the AF.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE 1: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: The "sessionId" attribute of the DataReportingSession data type shall not be provided as it is not applicable.				

Table 5.23.2.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI located in an alternative NEF.

Table 5.23.2.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

5.23.2.3.3.2 PUT

This method enables an AF to update an existing Individual Data Reporting Session resource at the NEF.

This method shall support the URI query parameters specified in table 5.23.2.3.3.2-1.

Table 5.23.2.3.3.2-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description

This method shall support the request data structures specified in table 5.23.2.3.3.2-2 and the response data structures and response codes specified in table 5.23.2.3.3.2-4.

Table 5.23.2.3.3.2-2: Data structures supported by the PUT request body on this resource

Data type	P	Cardinality	Description
DataReportingSession	M	1	Parameters to update the Individual Data Reporting Session resource.
NOTE: The "sessionId" attribute of the DataReportingSession data type shall not be provided as it is not applicable.			

Table 5.23.2.3.3.2-3: Data structures supported by the PUT response body on this resource

Data type	P	Cardinality	Response codes	Description
DataReportingSession	M	1	200 OK	The Individual Data Reporting Session resource was updated successfully and a representation of the created resource is returned in the response body.
n/a			204 No Content	The Individual Data Reporting Session resource was successfully updated and no content is to be returned in the response body.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE 1: The mandatory HTTP error status code for the PUT method listed in Table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: The "sessionId" attribute of the DataReportingSession data type shall not be provided as it is not applicable.				

Table 5.23.2.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.23.2.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.23.2.3.3.3 DELETE

This method enables an AF to request the deletion of an Individual Data Reporting Session resource at the NEF.

This method shall support the URI query parameters specified in table 5.23.2.3.3.3-1.

Table 5.23.2.3.3.3-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.23.2.3.3.3-2 and the response data structures and response codes specified in table 5.23.2.3.3.3-3.

Table 5.23.2.3.3.3-2: Data structures supported by the DELETE request body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.23.2.3.3.3-3: Data structures supported by the DELETE response body on this resource

Data type	P	Cardinality	Response Codes	Description
n/a			204 No Content	Successful response. The Individual Data Reporting Session resource was successfully deleted.
			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE 1: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.23.2.3.3.3-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.23.2.3.3.3-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.23.2.3.4 Resource custom operations

5.23.2.3.4.1 Overview

Table 5.23.2.3.4.1-1: Custom operations

Operation name	Custom operation URI	Mapped HTTP method	Description
Report	/sessions/{sessionId}/report	POST	Enables to send collected UE data reports.

5.23.2.3.4.2 Operation: Report

5.23.2.3.4.2.1 Description

The custom operation enables an AF to send collected UE data reports to the NEF.

5.23.2.3.4.2.2 Operation Definition

This operation shall support the request data structures specified in table 5.23.2.3.4.2.2-1 and the response data structures and response codes specified in table 5.23.2.3.4.2.2-2.

Table 5.23.2.3.4.2.2-1: Data structures supported by the POST request body on this resource

Data type	P	Cardinality	Description
DataReport	M	1	UE data reported by the data collection client.

Table 5.23.2.3.4.2.2-2: Data structures supported by the POST response body on this resource

Data type	P	Cardinality	Response codes	Description
DataReportingSession	O	0..1	200 OK	The UE data report was successfully received.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE 1: The mandatory HTTP error status code for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: The "sessionId" attribute of the DataReportingSession data type shall not be provided as it is not applicable.				

Table 5.23.2.3.4.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.23.2.3.4.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.23.3 Custom Operations without associated resources

There are no custom operations without associated resources defined for this API in this release of the specification.

5.23.4 Notifications

There are no notifications defined for this API in this release of the specification.

5.23.5 Data Model

5.23.3.1 General

This clause specifies the application data model supported by the DataReporting API. Table 5.23.5.1-1 specifies the data types defined for the DataReporting API.

Table 5.23.5.1-1: DataReporting specific Data Types

Data type	Clause defined	Description
n/a		

Table 5.23.5.1-2 specifies data types re-used by the DataReporting API from other specifications, including a reference to their respective specifications, and when needed, a short description of their use within the DataReporting API.

Table 5.23.5.1-2: Re-used Data Types

Data type	Reference	Comments	Applicability
DataReport	3GPP TS 26.532 [60]	Reported data by the AF.	
DataReportingSession	3GPP TS 26.532 [60]	Configuration by the AF specifying the data to be reported.	

5.23.6 Used Features

The table below defines the features applicable to the DataReporting API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.23.6-1: Features used by DataReporting API

Feature number	Feature Name	Description

5.23.7 Error handling

5.23.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.23.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the DataReporting API.

5.23.7.3 Application Errors

The application errors defined for the DataReporting API are listed in table 5.23.7.3-1.

Table 5.23.7.3-1: Application errors

Application Error	HTTP status code	Description

5.24 DataReportingProvisioning API

5.24.1 Introduction

The Nnef_DataReportingProvisioning service shall use the DataReportingProvisioning API.

The API URI of the DataReportingProvisioning API shall be:

{apiRoot}/<apiName>/<apiVersion>

The request URIs used in HTTP requests shall have the Resource URI structure defined in clause 5.2.4 of 3GPP TS 29.122 [4], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificSuffixes>

with the following components:

- "apiRoot" is set as defined in clause 5.2.4 of 3GPP TS 29.122 [4].
- "apiName" shall be set to "3gpp-data-reporting-provisioning".
- "apiVersion" shall be set to "v1" for the current version defined in the present document.

All resource URIs in the clauses below are defined relative to the above API URI.

5.24.2 Resources

This clause describes the structure for the Resource URIs as shown in Figure 5.24.2-1 and the resources and HTTP methods used for the DataReportingProvisioning API.

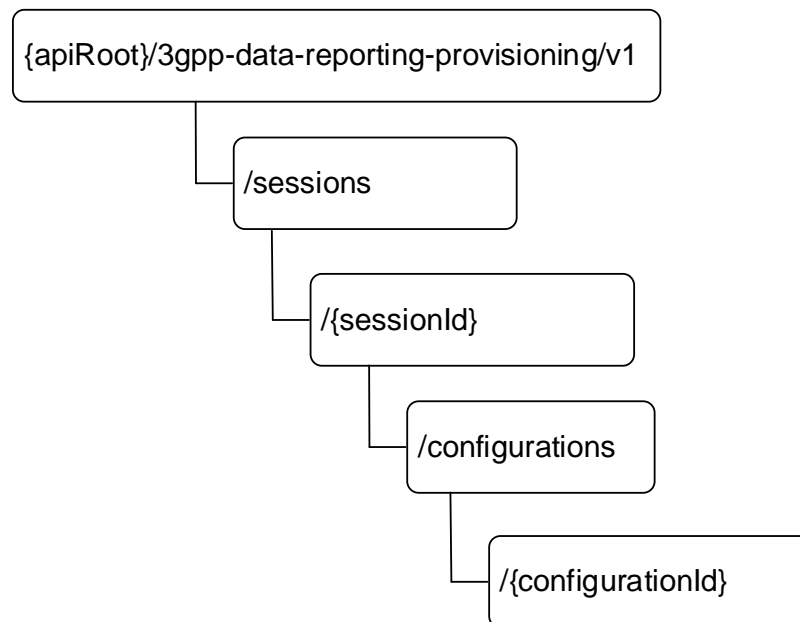


Figure 5.24.2-1: Resource URI structure of the DataReportingProvisioning API

Table 5.24.2-1 provides an overview of the resources and applicable HTTP methods.

Table 5.24.2-1: Resources and methods overview

Resource name	Resource URI (relative path under API URI)	HTTP method	Description (service operation)
Data Reporting Provisioning Sessions	/sessions	POST	Create a Data Reporting Provisioning Session.
Individual Data Reporting Provisioning Session	/sessions/{sessionId}	GET	Retrieve an existing Individual Data Reporting Provisioning Session resource.
		DELETE	Delete an existing Individual Data Reporting Provisioning Session resource.
Data Reporting Configuration	/sessions/{sessionId}/configurations	POST	Create a new Data Reporting Configuration.
Individual Data Reporting Configuration	/sessions/{sessionId}/configurations/{configurationId}	GET	Retrieves an existing individual Data Reporting Configuration resource.
		PUT	Update an existing individual Data Reporting Configuration resource.
		PATCH	Modify an existing Individual Data Reporting Configuration resource.
		DELETE	Delete an existing Individual Data Reporting Configuration resource.

5.24.2.2 Resource: Data Reporting Provisioning Sessions

5.24.2.2.1 Introduction

This resource represents the collection of Data Reporting Provisioning Sessions managed by the NEF.

This resource is modelled with the Collection resource archetype (see clause C.2 of 3GPP TS 29.501 [3]).

5.24.2.2.2 Resource definition

Resource URL: **{apiRoot}/3gpp-data-reporting-provisioning/v1/sessions**

This resource shall support the resource URI variables defined in table 5.24.2.2.2-1.

Table 5.24.2.2-1: Resource URL variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.24.1.

5.24.2.2.3 Resource Methods

5.24.2.2.3.1 POST

This method enables an AF to request the creation of a Data Reporting Provisioning Session at the NEF.

This method shall support the URI query parameters specified in table 5.24.2.2.3.1-1.

Table 5.24.2.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
N/A					

This method shall support the request data structures specified in table 5.24.2.2.3.1-2 and the response data structures and response codes specified in table 5.24.2.2.3.1-4.

Table 5.24.2.2.3.1-2: Data structures supported by the POST request body on this resource

Data type	P	Cardinality	Description
DataReportingProvisioningSession (NOTE)	M	1	Representation of the Individual Data Reporting Provisioning Session to be created in the NEF.
NOTE: The "provisioningSessionId" attribute of the DataReportingProvisioningSession data type shall not be provided as it is not applicable.			

Table 5.24.2.2.3.1-3: Data structures supported by the POST response body on this resource

Data type	P	Cardinality	Response codes	Description
DataReportingProvisioningSession (NOTE 2)	M	1	201 Created	Successful case. A representation of the created Individual Data Reporting Provisioning Session resource is returned. The URI of the created resource shall be returned in an HTTP "Location" header.
NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: The "provisioningSessionId" attribute of the DataReportingProvisioningSession data type shall not be provided as it is not applicable.				

Table 5.24.2.2.3.1-4: Headers supported by the 201 response code on this resource

HTTP response header	Data type	P	Cardinality	Description
Location	string	M	1	The URI of the newly created resource, according to the structure: {apiRoot}/3gpp-data-reporting-provisioning/v1/sessions/{sessionId}

5.24.2.3 Resource: Individual Data Reporting Provisioning Session

5.24.2.3.1 Introduction

This resource represents an Individual Data Reporting Provisioning Session managed by the NEF.

This resource is modelled with the Document resource archetype (see clause C.1 of 3GPP TS 29.501 [3]).

5.24.2.3.2 Resource Definition

Resource URL: {apiRoot}/3gpp-data-reporting-provisioning/v1/sessions/{sessionId}

This resource shall support the resource URI variables defined in table 5.24.2.3.2-1.

Table 5.24.2.3.2-1: Resource URL variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.24.1
sessionId	string	Represents the identifier of the Individual Data Reporting Provisioning Session resource.

5.24.2.3.3 Resource standard methods

5.24.2.3.3.1 GET This method enables an AF to retrieve an existing Individual Data Reporting Provisioning Session resource at the NEF.

This method shall support the URI query parameters specified in table 5.24.2.3.3.1-1.

Table 5.24.2.3.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.24.2.3.3.1-2 and the response data structures and response codes specified in table 5.24.2.3.3.1-3.

Table 5.24.2.3.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.24.2.3.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
DataReportingProvisioningSession (NOTE 2)	M	1	200 OK	Successful case. The requested Individual Data Reporting Provisioning Session resource is returned to the AF.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE 1: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: The "provisioningSessionId" attribute of the DataReportingProvisioningSession data type shall not be provided as it is not applicable.				

Table 5.24.2.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI located in an alternative NEF.

Table 5.24.2.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

5.24.2.3.3.2 Void

5.24.2.3.3.3 DELETE

This method enables an AF to request the deletion of an existing Individual Data Reporting Provisioning Session resource at the NEF.

This method shall support the URI query parameters specified in table 5.24.2.3.3.3-1.

Table 5.24.2.3.3.3-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.24.2.3.3.3-2 and the response data structures and response codes specified in table 5.24.2.3.3.3-3.

Table 5.24.2.3.3.3-2: Data structures supported by the DELETE request body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.24.2.3.3.3-3: Data structures supported by the DELETE response body on this resource

Data type	P	Cardinality	Response Codes	Description
n/a			204 No Content	Successful response. The Individual Data Reporting Provisioning Session resource was successfully deleted.
			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.24.2.3.3.3-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same NEF.

Table 5.24.2.3.3.3-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located on an alternative service instance within the same NEF.

5.24.2.4 Resource: Data Reporting Configurations

5.24.2.4.1 Introduction

This resource represents the collection of Data Reporting Configurations managed by the NEF.

This resource is modelled with the Collection resource archetype (see clause C.2 of 3GPP TS 29.501 [3]).

5.24.2.4.2 Resource definition

Resource URL: **{apiRoot}/3gpp-data-reporting-provisioning/v1/sessions/{sessionId}/configurations**

This resource shall support the resource URI variables defined in table 5.24.2.4.2-1.

Table 5.24.2.4.2-1: Resource URL variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.24.1.
sessionId	string	Represents the identifier of the existing Data Reporting Provisioning Session resource.

5.24.2.4.3 Resource Methods

5.24.2.4.3.1 POST

This method enables an AF to request the creation of a Data Reporting Configuration at the NEF.

This method shall support the URI query parameters specified in table 5.24.2.4.3.1-1.

Table 5.24.2.4.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.24.2.4.3.1-2 and the response data structures and response codes specified in table 5.24.2.4.3.1-4.

Table 5.24.2.4.3.1-2: Data structures supported by the POST request body on this resource

Data type	P	Cardinality	Description
DataReportingConfiguration (NOTE)	M	1	Representation of the Data Reporting Configuration to be created in the NEF.
NOTE: The "dataReportingConfigurationId" attribute of the DataReportingConfiguration data type shall not be provided as it is not applicable.			

Table 5.24.2.4.3.1-3: Data structures supported by the POST response body on this resource

Data type	P	Cardinality	Response codes	Description
DataReportingConfiguration (NOTE 2)	M	1	201 Created	Successful case. A representation of the created Individual Data Reporting Configuration resource is returned. The URI of the created resource shall be returned in an HTTP "Location" header.
NOTE 1: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: The "dataReportingConfigurationId" attribute of the DataReportingConfiguration data type shall not be provided as it is not applicable.				

Table 5.24.2.4.3.1-4: Headers supported by the 201 response code on this resource

HTTP response header	Data type	P	Cardinality	Description
Location	string	M	1	The URI of the newly created resource, according to the structure: {apiRoot}/3gpp-data-reporting-provisioning/v1/sessions/{sessionId}/configurations/{configurationId}

Table 5.24.2.4.3.1-5: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI located in an alternative NEF.

Table 5.24.2.4.3.1-6: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

5.24.2.5 Resource: Individual Data Reporting Configuration

5.24.2.5.1 Introduction

This resource represents an Individual Data Reporting Configuration resource managed by the NEF.

This resource is modelled with the Document resource archetype (see clause C.1 of 3GPP TS 29.501 [3]).

5.24.2.5.2 Resource Definition

Resource URL: **{apiRoot}/3gpp-data-reporting-provisioning/v1/sessions/{sessionId}/configurations/{configurationId}**

This resource shall support the resource URI variables defined in table 5.24.2.5.2-1.

Table 5.24.2.5.2-1: Resource URL variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.24.1
sessionId	string	Represents the identifier of the Individual Data Reporting Provisioning Session resource.
configurationId	string	Represents the identifier of the Individual Data Reporting Configuration resource.

5.24.2.5.3 Resource standard methods

5.24.2.5.3.2 GET

This method enables an AF to retrieve an existing Individual Data Reporting Configuration resource at the NEF.

This method shall support the URI query parameters specified in table 5.24.2.5.3.2-1.

Table 5.24.2.5.3.2-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.24.2.5.3.2-2 and the response data structures and response codes specified in table 5.24.2.5.3.2-3.

Table 5.24.2.5.3.2-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.24.2.5.3.2-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
DataReportingConfiguration (NOTE 2)	M	1	200 OK	Successful case. The requested Individual Data Reporting Configuration resource is returned to the AF.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE 1: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: The "dataReportingConfigurationId" attribute of the DataReportingConfiguration data type shall not be provided as it is not applicable.				

Table 5.24.2.5.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI located in an alternative NEF.

Table 5.24.2.5.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative target URI of the resource located in an alternative NEF.

5.24.2.5.3.3 PUT

This method enables an AF to update an existing Individual Data Reporting Configuration resource at the NEF.

This method shall support the URI query parameters specified in table 5.24.2.5.3.3-1.

Table 5.24.2.5.3.3-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description

This method shall support the request data structures specified in table 5.24.2.5.3.3-2 and the response data structures and response codes specified in table 5.24.2.5.3.3-3.

Table 5.24.2.5.3.3-2: Data structures supported by the PUT request body on this resource

Data type	P	Cardinality	Description
DataReportingConfiguration (NOTE)	M	1	Parameters to update the Individual Data Reporting Configuration resource.
NOTE: The "dataReportingConfigurationId" attribute of the DataReportingConfiguration data type shall not be provided as it is not applicable.			

Table 5.24.2.5.3.3-3: Data structures supported by the PUT response body on this resource

Data type	P	Cardinality	Response codes	Description
DataReportingConfiguration (NOTE 2)	M	1	200 OK	The Individual Data Reporting Configuration resource was updated successfully and a representation of the updated resource is returned in the response body.
n/a			204 No Content	The Individual Data Reporting Configuration resource was successfully updated and no content is to be returned in the response body.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE 1: The mandatory HTTP error status code for the PUT method listed in Table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: The "dataReportingConfigurationId" attribute of the DataReportingConfiguration data type shall not be provided as it is not applicable.				

Table 5.24.2.5.3.3-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.24.2.5.3.3-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.24.2.5.3.3A PATCH

The PATCH method is used to modify an existing Individual Data Reporting Configuration resource.

This method shall support the request data structures specified in table 5.24.2.5.3.3A-1, and the response data structures and response codes specified in table 5.24.2.5.3.3A-2.

Table 5.24.2.5.3.3A-1: Data structures supported by the PATCH request body on this resource

Data type	P	Cardinality	Description
DataReportingConfigurationPatch	M	1	Parameters to modify for a Data Reporting Configuration resource.

Table 5.24.2.5.3.3A-2: Data structures supported by the PATCH response body on this resource

Data type	P	Cardinality	Response codes	Description
DataReportingConfiguration (NOTE 2)	M	1	200 OK	The Data Reporting Configuration resource was updated successfully by configuration data provided.
n/a			204 No Content	The Data Reporting Configuration resource was successfully updated and no content is to be returned in the response body.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE 1: The mandatory HTTP error status code for the PATCH method listed in Table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				
NOTE 2: The "dataReportingConfigurationId" attribute of the DataReportingConfiguration data type shall not be provided as it is not applicable.				

Table 5.24.2.5.3.3A-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.24.2.5.3.3A-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.24.2.5.3.4 DELETE

This method enables an AF to request the deletion of an existing Individual Data Reporting Configuration resource at the NEF.

This method shall support the URI query parameters specified in table 5.24.2.5.3.4-1.

Table 5.24.2.5.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.24.2.5.3.4-2 and the response data structures and response codes specified in table 5.24.2.5.3.4-3.

Table 5.24.2.5.3.4-2: Data structures supported by the DELETE request body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.24.2.5.3.4-3: Data structures supported by the DELETE response body on this resource

Data type	P	Cardinality	Response Codes	Description
n/a			204 No Content	Successful response. The Data Reporting Configuration resource was successfully deleted.
			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE 1: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.24.2.5.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.24.2.5.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	An alternative URI of the resource located in an alternative NEF.

5.24.3 Custom Operations without associated resources

There are no custom operations without associated resources defined for this API in this release of the specification.

5.24.4 Notifications

There are no notifications defined for this API in this release of the specification.

5.24.5 Data Model

5.24.5.1 General

This subclause specifies the application data model supported by the DataReportingProvisioning API. Table 5.24.5.1-1 specifies the data types defined for the DataReportingProvisioning API.

Table 5.24.5.1-1: DataReportingProvisioning specific Data Types

Data type	Clause defined	Description
n/a		

Table 5.24.5.1-2 specifies data types re-used by the DataReportingProvisioning API from other specifications, including a reference to their respective specifications, and when needed, a short description of their use within the DataReportingProvisioning API.

Table 5.24.5.1-2: DataReportingProvisioning re-used Data Types

Data type	Reference	Comments	Applicability
DataReportingProvisioningSession	3GPP TS 26.532 [60]	Configuration by the AF specifying the data to be collected, processed and reported.	
DataReportingConfiguration	3GPP TS 26.532 [60]	Configuration data related to UE data collection and reporting.	
DataReportingConfigurationPatch	3GPP TS 26.532 [60]	Contains the requested modifications to the configuration data regarding UE data collection and reporting.	

5.24.6 Used Features

The table below defines the features applicable to the DataReportingProvisioning API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.24.6-1: Features used by DataReportingProvisioning API

Feature number	Feature Name	Description

5.24.7 Error handling

5.24.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following subclauses shall apply.

5.24.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the DataReportingProvisioning API.

5.24.7.3 Application Errors

The application errors defined for the DataReportingProvisioning API are listed in table 5.24.7.3-1.

Table 5.24.7.3-1: Application errors

Application Error	HTTP status code	Description

5.25 UEId API

5.25.1 Introduction

The Nnef_UEId service shall use the UEId API.

The API URI of UEId API shall be:

{apiRoot}/3gpp-ucid/v1

with the following components:

- "apiRoot" is set as described in clause 5.2.4 in 3GPP TS 29.122 [4].

- "apiName" shall be set to "3gpp-ueid".
- "apiVersion" shall be set to "v1" for the current version defined in the present document.

All resource URIs in the clauses below are defined relative to the above root URI.

5.25.2 Resources

There are no resources defined for this API in this release of the specification.

5.25.3 Custom Operations without associated resources

5.25.3.1 Overview

The structure of the custom operation URIs of the UEId API is shown in Figure 5.25.3.1-1.

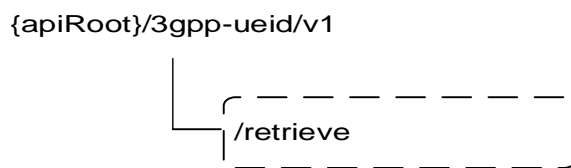


Figure 5.25.3.1-1: Custom operation URI structure of the UEId API

Table 5.25.3.1-1 provides an overview of the custom operations and applicable HTTP methods.

Table 5.25.3.1-1: Custom operations without associated resources

Operation name	Custom operation URI	Mapped HTTP method	Description
Retrieve	/retrieve	POST	Request to retrieve AF specific UE ID information.

5.25.3.2 Operation: Retrieve

5.25.3.2.1 Description

The custom operation allows a service consumer to retrieve AF specific UE ID information via the NEF.

5.25.3.2.2 Operation Definition

This operation shall support the request and response data structures and response codes specified in table 5.25.3.2.2-1 and table 5.25.3.2.2-2.

Table 5.25.3.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
UeldReq	M	1	Parameters to request to retrieve AF specific UE ID information.

Table 5.25.3.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
UeIdInfo	M	1	200 OK	The requested AF specific UE ID information was returned successfully.
ProblemDetails	O	0..1	403 Forbidden	If the AF request is not authorized, the NEF shall respond with "403 Forbidden".
ProblemDetails	O	0..1	404 Not Found	If the requested UE ID does not exist or not available in the subscription, the NEF shall respond with "404 Not Found".
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.25.3.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.25.3.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.25.4 Notifications

There are no Notifications defined for this API in this release of the specification.

5.25.5 Data Model

5.25.5.1 General

This clause specifies the application data model supported by the UEId API. Table 5.25.5.1-1 specifies the data types defined for the UEId API.

Table 5.25.5.1-1: UEId service specific Data Types

Data type	Clause defined	Description	Applicability
UeIdReq	5.25.5.2.2	Represents the parameters to requestAF specific UE ID retrieval.	
UeIdInfo	5.25.5.2.3	Represents AF specific UE ID information.	

Table 5.25.5.1-2 specifies data types re-used by the UEId API from other specifications, including a reference to their respective specifications, and when needed, a short description of their use within the UEId API.

Table 5.25.5.1-2: Re-used Data Types

Data type	Reference	Comments
Dnn	3GPP TS 29.571 [8]	Identifies a DNN.
ExternalId	3GPP TS 29.122 [4]	Represents an External Identifier.
IpAddr	3GPP TS 29.571 [8]	Identifies an IP address.
MacAddr48	3GPP TS 29.571 [8]	Identifies a MAC address.
MtcProviderInformation	3GPP TS 29.571 [8]	Indicates MTC provider information.
Port	3GPP TS 29.122 [4]	Identifies an application port ID.
Snssai	3GPP TS 29.571 [8]	Identifies the S-NSSAI.
UInteger	3GPP TS 29.571 [8]	Represents a unsigned integer.

5.25.5.2 Structured data types

5.25.5.2.1 Introduction

This clause defines the structured data types to be used in resource representations.

5.25.5.2.2 Type: UeldReq

Table 5.25.5.2.2-1: Definition of type UeldReq

Attribute name	Data type	P	Cardinality	Description	Applicability (NOTE 1)
afId	string	M	1	Represents the identifier of the AF that is sending the request.	
appPortId	Port	O	0..1	Identifies an application port ID. See clause 9.2.3.24.4 of 3GPP TS 23.040 [62] for further details.	
dnn	Dnn	O	0..1	Identifies a DNN.	
ipDomain	string	O	0..1	The IPv4 address domain identifier. The attribute may only be present if the IPv4 address is provided in the "ueIpAddr" attribute.	
mtcProviderId	MtcProviderInformation	O	0..1	Indicates MTC provider information.	
snssai	Snssai	O	0..1	Identifies an S-NSSAI.	
ueIpAddr	IpAddr	C	0..1	Identifies a UE IP Address. (NOTE 2)	
ueMacAddr	MacAddr48	C	0..1	Identifies a UE MAC Address. (NOTE 2)	
NOTE 1: Properties marked with a feature as defined in clause 5.25.6 are applicable as described in clause 5.2.7 of 3GPP TS 29.122 [4]. If no feature is indicated, the related property is always applied.					
NOTE 2: One of the "ueIpAddr" attribute or "ueMacAddr" attribute shall be included.					

5.25.5.2.3 Type: UeldInfo

Table 5.25.5.2.3-1: Definition of type UeldInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
externalId	ExternalId	M	1	Contains the AF specific UE ID in the form of an external identifier uniquely identifying the user.	

5.25.5.3 Simple data types and enumerations

5.25.5.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.25.5.3.2 Simple data types

The simple data types defined in table 5.25.5.3.2-1 shall be supported.

Table 5.25.5.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.25.6 Used Features

The table below defines the features applicable to the UEId API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.25.6-1: Features used by UEId API

Feature number	Feature Name	Description

5.25.7 Error handling

5.25.7.1 General

HTTP error handling shall be supported as specified in subclause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following subclauses shall apply.

5.25.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the UEId API.

5.25.7.3 Application Errors

The application errors defined for the UEId API are listed in table 5.25.7.3-1.

Table 5.25.7.3-1: Application errors

Application Error	HTTP status code	Description
REQUEST_NOT_AUTHORIZED	403 Forbidden	Indicates that the request is not authorized.
UE_ID_NOT_AVAILABLE	404 Not Found	Indicates that the requested AF specific UE ID is not available.
UE_NOT_FOUND	404 Not Found	Indicates that the requested UE address is not found.

5.26 MBSUserService API

5.26.1 Introduction

The Nnef_MBSUserService service shall use the MBSUserService API.

The API URI of MBSUserService API shall be:

{apiRoot}/3gpp-mbs-us/v1

with the following components:

- "apiRoot" is set as defined in clause 5.2.4 of 3GPP TS 29.122 [4].
- "apiName" shall be set to "3gpp-mbs-us".
- "apiVersion" shall be set to "v1" for the current version defined in the present document.

All resource URIs in the clauses below are defined relative to the above root URI.

5.26.2 Resources

5.26.2.1 Overview

This clause describes the structure for the Resource URIs as shown in figure 5.26.2.1-1 and the resources and HTTP methods used for the MBSUserService API.

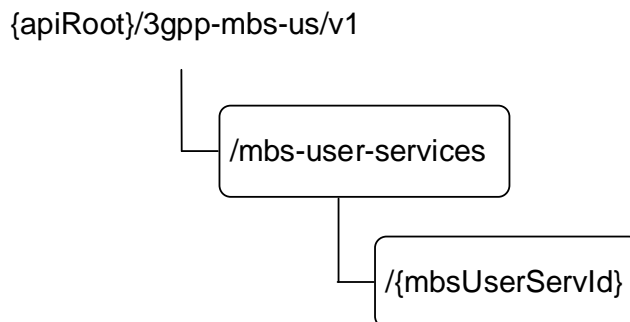


Figure 5.26.2.1-1: Resource URI structure of the MBSUserService API

Table 5.26.2.1-1 provides an overview of the resources and applicable HTTP methods.

Table 5.26.2.1-1: Resources and methods overview

Resource name	Resource URI (relative path under API URI)	HTTP method or custom operation	Description (service operation)
MBS User Services	/mbs-user-services	GET	Retrieve all the active MBS User Services managed by the NEF.
		POST	Request the creation of a new MBS User Service.
Individual MBS User Service	/mbs-user-services/{mbsUserServId}	GET	Retrieve an existng MBS User Service managed by the NEF.
		PUT	Update an existng MBS User Service managed by the NEF.
		PATCH	Modify an existng MBS User Service managed by the NEF.
		DELETE	Delete an existng MBS User Service managed by the NEF.

5.26.2.2 Resource: MBS User Services

5.26.2.2.1 Introduction

This resource represents the collection of MBS User Services managed by the NEF.

This resource is modelled with the Collection resource archetype (see clause C.2 of 3GPP TS 29.501 [3]).

5.26.2.2.2 Resource Definition

Resource URI: {apiRoot}/3gpp-mbs-us/v1/mbs-user-services

This resource shall support the resource URI variables defined in table 5.26.2.2.2-1.

Table 5.26.2.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.26.1.

5.26.2.2.3 Resource Standard Methods

5.26.2.2.3.1 GET

This method allows an AF to retrieve all the active MBS User Service resources at the NEF.

This method shall support the URI query parameters specified in table 5.26.2.2.3.1-1.

Table 5.26.2.2.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.26.2.2.3.1-2 and the response data structures and response codes specified in table 5.26.2.2.3.1-3.

Table 5.26.2.2.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.26.2.2.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(MBSUserService)	M	0..N	200 OK	Successful case. All the active MBS User Services managed by the NEF are returned.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.26.2.2.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.26.2.2.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.26.2.2.3.2 POST

This method enables an AF to request the creation of an MBS User Service resource at the NEF.

This method shall support the URI query parameters specified in table 5.26.2.2.3.2-1.

Table 5.26.2.2.3.2-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.26.2.2.3.2-2 and the response data structures and response codes specified in table 5.26.2.2.3.2-3.

Table 5.26.2.2.3.2-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
MBSUserService	M	1	Contains the parameters to request the creation of a new MBS User Service at the NEF.

Table 5.26.2.2.3.2-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MBSUserService	M	1	201 Created	Successful case. A new MBS User Service is successfully created and a representation of the created Individual MBS User Service resource is returned. An HTTP "Location" header that contains the resource URI of the created Individual MBS User Service resource shall also be included.
NOTE: The mandatory HTTP error status code for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.26.2.2.3.2-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-mbs-us/v1/mbs-user-services/{mbsUserServId}

5.26.2.2.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.26.2.3 Resource: Individual MBS User Service

5.26.2.3.1 Introduction

This resource represents an Individual MBS User Service managed by the NEF.

This resource is modelled with the Document resource archetype (see clause C.1 of 3GPP TS 29.501 [3]).

5.26.2.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-mbs-us/v1/mbs-user-services/{mbsUserServId}

This resource shall support the resource URI variables defined in table 5.26.2.3.2-1.

Table 5.26.2.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.26.1.
mbsUserServId	string	Contains the unique identifier of the Individual MBS User Service resource assigned by the NEF.

5.26.2.3.3 Resource Standard Methods

5.26.2.3.3.1 GET

This method allows an AF to retrieve an existing Individual MBS User Service resource at the NEF.

This method shall support the URI query parameters specified in table 5.26.2.3.3.1-1.

Table 5.26.2.3.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.26.2.3.3.1-2 and the response data structures and response codes specified in table 5.26.2.3.3.1-3.

Table 5.26.2.3.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.26.2.3.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MBSUserService	M	1	200 OK	Successful case. The requested Individual MBS User Service resource is successfully returned.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.26.2.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.26.2.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.26.2.3.3.2 PUT

This method enables an AF to request the update of an existing Individual MBS User Service resource at the NEF.

This method shall support the URI query parameters specified in table 5.26.2.3.3.2-1.

Table 5.26.2.3.3.2-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.26.2.3.3.2-2 and the response data structures and response codes specified in table 5.26.2.3.3.2-3.

Table 5.26.2.3.3.2-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
MBSUserService	M	1	Contains the updated representation of the Individual MBS User Service resource that is to be updated.

Table 5.26.2.3.3.2-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MBSUserService	M	1	200 OK	Successful case. The concerned Individual MBS User Service resource is successfully updated and a representation of the updated resource is returned in the response body.
n/a			204 No Content	Successful case. The concerned Individual MBS User Service resource is successfully updated and no content is returned in the response body.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE: The mandatory HTTP error status code for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.26.2.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.26.2.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.26.2.3.3.3 PATCH

This method enables an AF to request the modification of an existing Individual MBS User Service resource at the NEF.

This method shall support the URI query parameters specified in table 5.26.2.3.3.3-1.

Table 5.26.2.3.3.3-1: URI query parameters supported by the PATCH method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.26.2.3.3.3-2 and the response data structures and response codes specified in table 5.26.2.3.3.3-3.

Table 5.26.2.3.3.3-2: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
MBSUserServicePatch	M	1	Contains the parameters to request the modification of the Individual MBS User Service resource.

Table 5.26.2.3.3.3-3: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MBSUserService	M	1	200 OK	Successful case. The concerned Individual MBS User Service resource is successfully modified and a representation of the updated resource is returned in the response body.
n/a			204 No Content	Successful response. The Individual MBS User Service resource was successfully modified and no content is returned in the response body.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the PATCH method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.26.2.3.3.3-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.26.2.3.3.3-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.26.2.3.3.4 DELETE

This method enables an AF to request the deletion of an existing Individual MBS User Service resource at the NEF.

This method shall support the URI query parameters specified in table 5.26.2.3.3.4-1.

Table 5.26.2.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.26.2.3.3.4-2 and the response data structures and response codes specified in table 5.26.2.3.3.4-3.

Table 5.26.2.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.26.2.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response Codes	Description
n/a			204 No Content	Successful response. The Individual MBS User Service resource is successfully deleted.
			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.26.2.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.26.2.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.26.2.3.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.26.3 Custom Operations without associated resources

There are no custom operations without associated resources defined for this API in this release of the specification.

5.26.4 Notifications

There are no notifications defined for this API in this release of the specification.

5.26.5 Data Model

5.26.5.1 General

This clause specifies the application data model supported by the MBSUserService API. Table 5.26.5.1-1 specifies the data types defined for the MBSUserService API.

Table 5.26.5.1-1: MBSUserService specific Data Types

Data type	Clause defined	Description	Applicability

Table 5.26.5.1-2 specifies data types re-used by the MBSUserService API from other specifications, including a reference to their respective specifications, and when needed, a short description of their use within the MBSUserService API.

Table 5.26.5.1-2: Re-used Data Types

Data type	Reference	Comments	Applicability
MBSUserService	3GPP TS 29.580 [66]	Represents MBS User Service parameters.	
MBSUserServicePatch	3GPP TS 29.580 [66]	Represents the requested modifications to an MBS User Service resource representation.	

5.26.5.2 Structured data types

5.26.5.2.1 Introduction

This clause defines the structures to be used in resource representations.

There are no structured data types defined for this API in this release of the specification.

5.26.5.3 Simple data types and enumerations

5.26.5.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.26.5.3.2 Simple data types

The simple data types defined in table 5.26.5.3.2-1 shall be supported.

Table 5.26.5.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.26.6 Used Features

The table below defines the features applicable to the MBSUserService API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.26.6-1: Features used by MBSUserService API

Feature number	Feature Name	Description

5.26.7 Error handling

5.26.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.26.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MBSUserService API.

5.26.7.3 Application Errors

The application errors defined for the MBSUserService API are listed in table 5.26.7.3-1.

Table 5.26.7.3-1: Application errors

Application Error	HTTP status code	Description

5.27 MBSUserDataIngestSession API

5.27.1 Introduction

The Nnef_MBSUserDataIngestSession service shall use the MBSUserDataIngestSession API.

The API URI of MBSUserDataIngestSession API shall be:

{apiRoot}/3gpp-mbs-ud-ingest/v1

with the following components:

- "apiRoot" is set as defined in clause 5.2.4 of 3GPP TS 29.122 [4].
- "apiName" shall be set to "3gpp-mbs-ud-ingest".
- "apiVersion" shall be set to "v1" for the current version defined in the present document.

All resource URIs in the clauses below are defined relative to the above root URI.

5.27.2 Resources

5.27.2.1 Overview

This clause describes the structure for the Resource URIs as shown in figure 5.27.2.1-1 and the resources and HTTP methods used for the MBSUserDataIngestSession API.

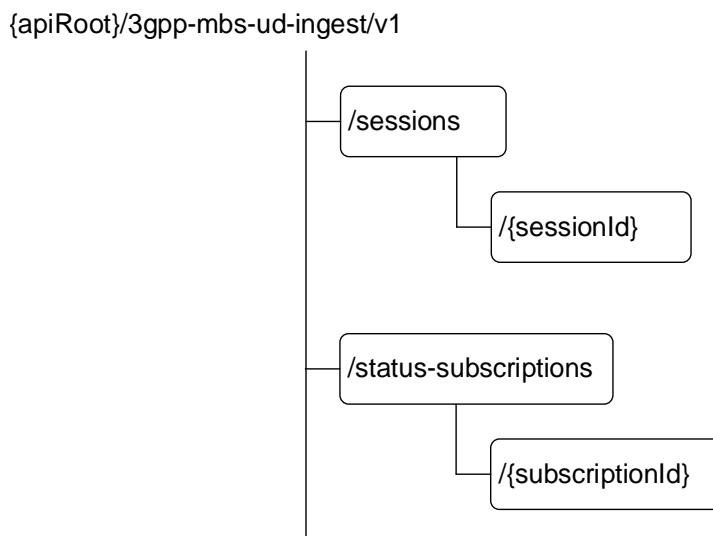


Figure 5.27.2.1-1: Resource URI structure of the MBSUserDataIngestSession API

Table 5.27.2.1-1 provides an overview of the resources and applicable HTTP methods.

Table 5.27.2.1-1: Resources and methods overview

Resource name	Resource URI (relative path under API URI)	HTTP method or custom operation	Description (service operation)
MBS User Data Ingest Sessions	/sessions	GET	Retrieve all the active MBS User Data Ingest Sessions managed by the NEF.
		POST	Request the creation of a new MBS User Data Ingest Session.
Individual MBS User Data Ingest Session	/sessions/{sessionId}	GET	Retrieve an existing Individual MBS User Data Ingest Session managed by the NEF.
		PUT	Update an existing Individual MBS User Data Ingest Session managed by the NEF.
		PATCH	Modify an existing Individual MBS User Data Ingest Session managed by the NEF.
		DELETE	Delete an existing Individual MBS User Data Ingest Session managed by the NEF.
MBS User Data Ingest Session Status Subscriptions	/status-subscriptions	GET	Retrieve all the active MBS User Data Ingest Session Status Subscriptions managed by the NEF.
		POST	Request the creation of a new MBS User Data Ingest Session Status Subscription.

Individual MBS User Data Ingest Session Status Subscription	/status-subscriptions/{subscriptionId}	GET	Retrieve an existing Individual MBS User Data Ingest Session Status Subscription managed by the NEF.
		PUT	Update an existing MBS User Data Ingest Session Status Subscription managed by the NEF.
		PATCH	Modify an existing MBS User Data Ingest Session Status Subscription managed by the NEF.
		DELETE	Delete an existing Individual MBS User Data Ingest Session Status Subscription managed by the NEF.

5.27.2.2 Resource: MBS User Data Ingest Sessions

5.27.2.2.1 Introduction

This resource represents the collection of MBS User Data Ingest Sessions managed by the NEF.

This resource is modelled with the Collection resource archetype (see clause C.2 of 3GPP TS 29.501 [3]).

5.27.2.2.2 Resource Definition

Resource URI: {apiRoot}/3gpp-mbs-ud-ingest/v1/sessions

This resource shall support the resource URI variables defined in table 5.27.2.2.2-1.

Table 5.27.2.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.27.1.

5.27.2.2.3 Resource Standard Methods

5.27.2.2.3.1 GET

This method allows an AF to retrieve all the active MBS User Data Ingest Sessions managed by the NEF.

This method shall support the URI query parameters specified in table 5.27.2.2.3.1-1.

Table 5.27.2.2.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.27.2.2.3.1-2 and the response data structures and response codes specified in table 5.27.2.2.3.1-3.

Table 5.27.2.2.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.27.2.2.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(MBSUserDataIngSession)	M	0..N	200 OK	Successful case. All the active MBS User Data Ingest Sessions managed by the NEF are returned.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.27.2.2.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.27.2.2.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.27.2.2.3.2 POST

This method enables an AF to request the creation of an MBS User Data Ingest Session at the NEF.

This method shall support the URI query parameters specified in table 5.27.2.2.3.2-1.

Table 5.27.2.2.3.2-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.27.2.2.3.2-2 and the response data structures and response codes specified in table 5.27.2.2.3.2-3.

Table 5.27.2.2.3.2-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
MBSUserDataIngSession	M	1	Contains the parameters to request the creation of a new MBS User Data Ingest Session at the NEF.

Table 5.27.2.2.3.2-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response Codes	Description
MBSUserDataIngestSession	M	1	201 Created	Successful case. A new MBS User Data Ingest Session is successfully created and a representation of the created Individual MBS User Data Ingest Session resource is returned. An HTTP "Location" header that contains the URI of the created Individual MBS User Data Ingest Session resource is also included.
NOTE: The mandatory HTTP error status code for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.27.2.2.3.2-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-mbs-ud-ingest/v1/sessions/{sessionId}

5.27.2.2.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.27.2.3 Resource: Individual MBS User Data Ingest Session

5.27.2.3.1 Introduction

This resource represents an Individual MBS User Data Ingest Session resource managed by the NEF.

This resource is modelled with the Document resource archetype (see clause C.1 of 3GPP TS 29.501 [3]).

5.27.2.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-mbs-ud-ingest/v1/sessions/{sessionId}

This resource shall support the resource URI variables defined in table 5.27.2.3.2-1.

Table 5.27.2.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.27.1.
sessionId	string	Contains the unique identifier of the Individual MBS User Data Ingest Session resource assigned by the NEF.

5.27.2.3.3 Resource Standard Methods

5.27.2.3.3.1 GET

This method allows an AF to retrieve an existing "Individual MBS User Data Ingest Session" resource at the NEF.

This method shall support the URI query parameters specified in table 5.27.2.3.3.1-1.

Table 5.27.2.3.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.27.2.3.3.1-2 and the response data structures and response codes specified in table 5.27.2.3.3.1-3.

Table 5.27.2.3.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.27.2.3.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngestSession	M	1	200 OK	Successful case. The requested Individual MBS User Data Ingest Session resource is successfully returned.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.27.2.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.27.2.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.27.2.3.3.2 PUT

This method enables an AF to request the update of an existing "Individual MBS User Data Ingest Session" resource at the NEF.

This method shall support the URI query parameters specified in table 5.27.2.3.3.2-1.

Table 5.27.2.3.3.2-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.27.2.3.3.2-2 and the response data structures and response codes specified in table 5.27.2.3.3.2-3.

Table 5.27.2.3.3.2-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
MBSUserDataIngestSession	M	1	Contains the updated representation of the Individual MBS User Data Ingest Session resource that is to be updated.

Table 5.27.2.3.3.2-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngestSession	M	1	200 OK	Successful case. The concerned Individual MBS User Data Ingest Session resource is successfully updated and a representation of the updated resource is returned in the response body.
n/a			204 No Content	Successful case. The concerned Individual MBS User Data Ingest Session resource is successfully updated and no content is returned in the response body.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE: The mandatory HTTP error status code for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.27.2.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.27.2.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.27.2.3.3.3 PATCH

This method enables an AF to request the modification of an existing "Individual MBS User Data Ingest Session" resource at the NEF.

This method shall support the URI query parameters specified in table 5.27.2.3.3.3-1.

Table 5.27.2.3.3.3-1: URI query parameters supported by the PATCH method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.27.2.3.3.3-2 and the response data structures and response codes specified in table 5.27.2.3.3.3-3.

Table 5.27.2.3.3.3-2: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
MBSUserDataIngSessionPatch	M	1	Contains the parameters to request the modification of the Individual MBS User Data Ingest Session resource.

Table 5.27.2.3.3.3-3: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngSession	M	1	200 OK	Successful case. The concerned Individual MBS User Data Ingest Session resource is successfully modified and a representation of the updated resource is returned in the response body.
n/a			204 No Content	Successful response. The Individual MBS User Data Ingest Session resource is successfully modified and no content is returned in the response body.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the PATCH method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.27.2.3.3.3-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.27.2.3.3.3-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.27.2.3.3.4 DELETE

This method enables an AF to request the deletion of an existing "Individual MBS User Data Ingest Session" resource at the NEF.

This method shall support the URI query parameters specified in table 5.27.2.3.3.4-1.

Table 5.27.2.3.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.27.2.3.3.4-2 and the response data structures and response codes specified in table 5.27.2.3.3.4-3.

Table 5.27.2.3.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.27.2.3.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response Codes	Description
n/a			204 No Content	Successful response. The Individual MBS User Data Ingest Session resource is successfully deleted.
			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE 1: The mandatory HTTP error status code for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.27.2.3.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.27.2.3.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.27.2.3.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.27.2.4 Resource: MBS User Data Ingest Session Status Subscriptions

5.27.2.4.1 Introduction

This resource represents the collection of MBS User Data Ingest Session Status Subscriptions managed by the NEF.

This resource is modelled with the Collection resource archetype (see clause C.2 of 3GPP TS 29.501 [3]).

5.27.2.4.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-mbs-ud-ingest/v1/status-subscriptions**

This resource shall support the resource URI variables defined in table 5.27.2.4.2-1.

Table 5.27.2.4.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.27.1.

5.27.2.4.3 Resource Standard Methods

5.27.2.4.3.1 GET

This method allows an AF to retrieve all the active MBS User Data Ingest Session Status Subscriptions managed by the NEF.

This method shall support the URI query parameters specified in table 5.27.2.4.3.1-1.

Table 5.27.2.4.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.27.2.4.3.1-2 and the response data structures and response codes specified in table 5.27.2.4.3.1-3.

Table 5.27.2.4.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.27.2.4.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(MBSUserDataIngStatSubsc)	M	0..N	200 OK	Successful case. All the active MBS User Data Ingest Session Status Subscriptions managed by the NEF are returned.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.27.2.4.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.27.2.4.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.27.2.4.3.2 POST

This method enables an AF to request the creation of a new MBS User Data Ingest Sessstion Status Subscription at the NEF.

This method shall support the URI query parameters specified in table 5.27.2.4.3.2-1.

Table 5.27.2.4.3.2-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.27.2.4.3.2-2 and the response data structures and response codes specified in table 5.27.2.4.3.2-3.

Table 5.27.2.4.3.2-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
MBSUserDataIngStatSubsc	M	1	Contains the parameters to request the creation of a new MBS User Data Ingest Session Status Subscription at the NEF.

Table 5.27.2.4.3.2-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response Codes	Description
MBSUserDataIngStatSubsc	M	1	201 Created	Successful case. A new MBS User Data Ingest Session Status Subscription is successfully created and a representation of the created Individual MBS User Data Ingest Session Status Subscription resource is returned. An HTTP "Location" header that contains the URI of the created Individual MBS User Data Ingest Session Status Subscription resource is also included.
NOTE: The mandatory HTTP error status code for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.27.2.4.3.2-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-mbs-ud-ingest/v1/status-subscriptions/{subscriptionId}

5.27.2.4.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.27.2.5 Resource: Individual MBS User Data Ingest Session Status Subscription

5.27.2.5.1 Introduction

This resource represents an Individual MBS User Data Ingest Session Status Subscription managed by the NEF.

This resource is modelled with the Document resource archetype (see clause C.1 of 3GPP TS 29.501 [3]).

5.27.2.5.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-mbs-ud-ingest/v1/status-subscriptions/{subscriptionId}**

This resource shall support the resource URI variables defined in table 5.27.2.5.2-1.

Table 5.27.2.5.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.27.1.
sessionId	string	Contains the unique identifier of the Individual MBS User Data Ingest Session Status Subscription resource assigned by the NEF.

5.27.2.5.3 Resource Standard Methods

5.27.2.5.3.1 GET

This method allows an AF to retrieve an existing "Individual MBS User Data Ingest Session Status Subscription" resource at the NEF.

This method shall support the URI query parameters specified in table 5.27.2.5.3.1-1.

Table 5.27.2.5.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.27.2.5.3.1-2 and the response data structures and response codes specified in table 5.27.2.5.3.1-3.

Table 5.27.2.5.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.27.2.5.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngStatSubsc	M	1	200 OK	Successful case. The requested Individual MBS User Data Ingest Session Status Subscription resource is successfully returned.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.27.2.5.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.27.2.5.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.27.2.5.3.2 PUT

The PATCH method allows an AF to update an existing "Individual MBS User Data Ingest Session Status Subscription" resource managed by the NEF.

This method shall support the URI query parameters specified in table 5.27.2.5.3.2-1.

Table 5.27.2.5.3.2-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.27.2.5.3.2-2 and the response data structures and response codes specified in table 5.27.2.5.3.2-3.

Table 5.27.2.5.3.2-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
MBSUserDataIngStatSubsc	M	1	Contains the parameters to request the modification of an existing "Individual MBS User Data Ingest Session Status Subscription" resource.

Table 5.27.2.5.3.2-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngStat Subsc	M	1	200 OK	Successful case. The concerned "Individual MBS User Data Ingest Session Status Subscription" resource is successfully updated and a representation of the updated resource is returned in the response body.
n/a			204 No Content	Successful case. The concerned "Individual MBS User Data Ingest Session Status Subscription" resource is successfully updated, and no content is returned in the response body.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the PUT method listed in Table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.27.2.5.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.27.2.5.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.27.2.5.3.3 PATCH

The PATCH method allows an AF to modify an existing "Individual MBS User Data Ingest Session Status Subscription" resource managed by the NEF.

This method shall support the URI query parameters specified in table 5.27.2.5.3.3-1.

Table 5.27.2.5.3.3-1: URI query parameters supported by the PATCH method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.27.2.5.3.3-2 and the response data structures and response codes specified in table 5.27.2.5.3.3-3.

Table 5.27.2.5.3.3-2: Data structures supported by the PATCH Request Body on this resource

Data type	P	Cardinality	Description
MBSUserDataIngStatSubscPatch	M	1	Contains the parameters to request the modification of an existing "Individual MBS User Data Ingest Session Status Subscription" resource.

Table 5.27.2.5.3.3-3: Data structures supported by the PATCH Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngStat Subsc	M	1	200 OK	Successful case. The concerned "Individual MBS User Data Ingest Session Status Subscription" resource is successfully modified, and a representation of the updated resource is returned in the response body.
n/a			204 No Content	Successful case. The concerned "Individual MBS User Data Ingest Session Status Subscription" resource is successfully modified and no content is returned in the response body.
n//a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the PATCH method listed in Table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.27.2.5.3.3-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.27.2.5.3.3-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.27.2.5.3.4 DELETE

This method enables an AF to request the deletion of an existing Individual MBS User Data Ingest Session Status Subscription resource at the NEF.

This method shall support the URI query parameters specified in table 5.27.2.5.3.4-1.

Table 5.27.2.5.3.4-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.27.2.5.3.4-2 and the response data structures and response codes specified in table 5.27.2.5.3.4-3.

Table 5.27.2.5.3.4-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.27.2.5.3.4-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response Codes	Description
n/a			204 No Content	Successful response. The Individual MBS User Data Ingest Session Status Subscription resource is successfully deleted.
			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].

NOTE 1: The mandatory HTTP error status code for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.

Table 5.27.2.5.3.4-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.27.2.5.3.4-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.27.2.5.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.27.3 Custom Operations without associated resources

There are no custom operations without associated resources defined for this API in this release of the specification.

5.27.4 Notifications

5.27.4.1 General

Notifications shall comply to clause 5.2.5 of 3GPP TS 29.122 [4].

Table 5.27.4.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
MBS User Data Ingest Session Status Notification	{notifUri}	POST	This operation enables the NEF to notify a previously subscribed AF on status changes of an MBS User Data Ingest Session.

5.27.4.2 MBS User Data Ingest Session Status Change Notification

5.27.4.2.1 Description

The MBS user data ingest session status change notification is used by the NEF to report one or several observed MBS user data ingest session status change events to a previously subscribed AF.

5.27.4.2.2 Target URI

The Callback URI "{notifUri}" shall be used with the callback URI variables defined in table 5.27.4.2.2-1.

Table 5.27.4.2.2-1: Callback URI variables

Name	Definition
notifUri	Callback reference provided by the AF during the creation/update/modification of the corresponding MBS User Data Ingest Session Status Subscription.

5.27.4.2.3 Operation Definition

5.27.4.2.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.27.4.2.3.1-1 and the response data structures and response codes specified in table 5.27.4.2.3.1-2.

Table 5.27.4.2.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
MBSUserDataIngestStatNotif	M	1	Provides information about the observed MBS user data ingest session status change event notification by the NEF to the AF.

Table 5.27.4.2.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The MBS User Data Ingest Session Status Change Notification is successfully received.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.27.4.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

Table 5.27.4.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

5.27.4.2.3.2 Notification via Websocket

If supported by both AF and NEF and successfully negotiated, the MBS User Data Ingest Session Status Change Notification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4 of 3GPP TS 29.122 [4].

5.27.5 Data Model

5.27.5.1 General

This clause specifies the application data model supported by the MBSUserDataIngestSession API. Table 5.27.5.1-1 specifies the data types defined for the MBSUserDataIngestSession API.

Table 5.27.5.1-1: MBSUserDataIngestSession specific Data Types

Data type	Clause defined	Description	Applicability

Table 5.27.5.1-2 specifies data types re-used by the MBSUserDataIngestSession API from other specifications, including a reference to their respective specifications, and when needed, a short description of their use within the MBSUserDataIngestSession API.

Table 5.27.5.1-2: Re-used Data Types

Data type	Reference	Comments	Applicability
MBSUserDataIngSession	3GPP TS 29.580 [66]	Represents MBS User Data Ingest Session parameters.	
MBSUserDataIngSessionPatch	3GPP TS 29.580 [66]	Represents the requested modifications to an MBS User Data Ingest Session resource representation.	
MBSUserDataIngStatNotif	3GPP TS 29.580 [66]	Represents an MBS User Data Ingest Session Status Notification.	
MBSUserDataIngStatSubsc	3GPP TS 29.580 [66]	Represents an MBS User Data Ingest Session Status Subscription.	
MBSUserDataIngStatSubscPatch	3GPP TS 29.580 [66]	Represents the requested modifications to an MBS User Data Ingest Session Status Subscription.	

5.27.5.2 Structured data types

5.27.5.2.1 Introduction

This clause defines the structures to be used in resource representations.

There are no structured data types defined for this API in this release of the specification.

5.27.5.3 Simple data types and enumerations

5.27.5.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.27.5.3.2 Simple data types

The simple data types defined in table 5.27.5.3.2-1 shall be supported.

Table 5.27.5.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.27.6 Used Features

The table below defines the features applicable to the MBSUserDataIngestSession API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.27.6-1: Features used by MBSUserDataIngestSession API

Feature number	Feature Name	Description
1	Notification_websocket	The delivery of notifications over Websocket is supported as described in 3GPP TS 29.122 [4]. This feature requires that the Notification_test_event feature is also supported.
2	Notification_test_event	The testing of notification connection is supported as described in 3GPP TS 29.122 [4].

5.27.7 Error handling

5.27.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.27.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MBSUserDataIngestSession API.

5.27.7.3 Application Errors

The application errors defined for the MBSUserDataIngestSession API are listed in table 5.27.7.3-1.

Table 5.27.7.3-1: Application errors

Application Error	HTTP status code	Description

5.28 MSEventExposure API

5.28.1 Introduction

The Nnef_MSEventExposure service shall use the MSEventExposure API.

The API URI of MSEventExposure API shall be:

{apiRoot}/3gpp-ms-event-exposure/v1

with the following components:

- "apiRoot" is set as defined in clause 5.2.4 of 3GPP TS 29.122 [4].
- "apiName" shall be set to "3gpp-ms-event-exposure".
- "apiVersion" shall be set to "v1" for the current version defined in the present document.

All resource URIs in the clauses below are defined relative to the above root URI.

5.28.2 Resources

5.28.2.1 Overview

This clause describes the structure for the Resource URIs as shown in figure 5.28.2.1-1 and the resources and HTTP methods used for the MSEventExposure API.

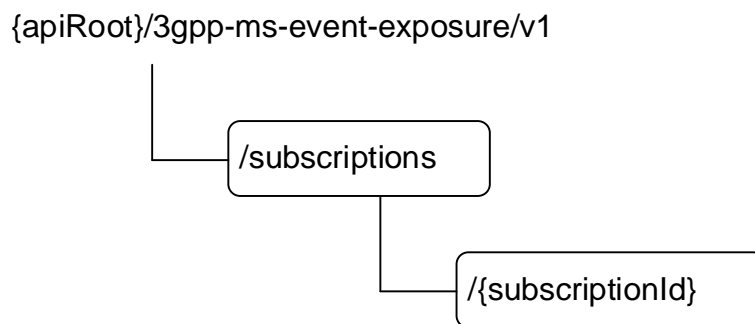


Figure 5.28.2.1-1: Resource URI structure of the MSEventExposure API

Table 5.28.2.1-1 provides an overview of the resources and applicable HTTP methods.

Table 5.28.2.1-1: Resources and methods overview

Resource name	Resource URI (relative path under API URI)	HTTP method or custom operation	Description (service operation)
Media Streaming Event Exposure Subscriptions	/subscriptions	GET	Reads all the existing Media Streaming Event Exposure Subscriptions.
		POST	Request the creation of a Media Streaming Event Subscription.
Individual Media Streaming Event Exposure Subscription	/subscriptions/{subscriptionId}	GET	Read an existing Individual Media Streaming Event Exposure Subscription resource.
		PUT	Update an existing Individual Media Streaming Event Exposure Subscription.
		DELETE	Delete an existing Individual Media Streaming Event Exposure Subscription.

5.28.2.2 Resource: Media Streaming Event Exposure Subscriptions

5.28.2.2.1 Introduction

This resource represents the collection of Media Streaming Event Exposure Subscription resources managed by the NEF.

This resource is modelled with the Collection resource archetype (see clause C.2 of 3GPP TS 29.501 [3]).

5.28.2.2.2 Resource Definition

Resource URI: **{apiRoot}/3gpp-ms-event-exposure/v1/subscriptions**

This resource shall support the resource URI variables defined in table 5.28.2.2.2-1.

Table 5.28.2.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.28.1.

5.28.2.2.3 Resource Standard Methods

5.28.2.2.3.1 GET

This method allows an AF to retrieve all the active Media Streaming Event Exposure Subscription resource at the NEF.

This method shall support the URI query parameters specified in table 5.28.2.2.3.1-1.

Table 5.28.2.2.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.28.2.2.3.1-2 and the response data structures and response codes specified in table 5.28.2.2.3.1-3.

Table 5.28.2.2.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.28.2.2.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
array(AfEventExposureSubsc)	M	0..N	200 OK	Successful case. All the active Media Streaming Event Exposure Subscriptions managed by the NEF are returned.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.28.2.2.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.28.2.2.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.28.2.2.3.2 POST

This method enables an AF to request the creation of a new Media Streaming Event Exposure Subscription at the NEF.

This method shall support the URI query parameters specified in table 5.28.2.2.3.2-1.

Table 5.28.2.2.3.2-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.28.2.2.3.2-2 and the response data structures and response codes specified in table 5.28.2.2.3.2-3.

Table 5.28.2.2.3.2-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AfEventExposureSubsc	M	1	Contains the parameters to request the creation of a new Media Streaming Event Exposure Subscription at the NEF.

Table 5.28.2.2.3.2-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response Codes	Description
AfEventExposureSubsc	M	1	201 Created	Successful case. A new Media Streaming Event Exposure Subscription is successfully created and a representation of the created Individual Media Streaming Event Exposure Subscription resource is returned. An HTTP "Location" header that contains the resource URI of the created Individual Media Streaming Event Exposure Subscription resource shall also be included.
NOTE: The mandatory HTTP error status code for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.28.2.2.3.2-4: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/3gpp-ms-event-exposure/v1/subscriptions/{subscriptionId}

5.28.2.2.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.28.2.3 Resource: Individual Media Streaming Event Exposure Subscription

5.28.2.3.1 Introduction

This resource represents an Individual Media Streaming Event Exposure Subscription managed by the NEF.

This resource is modelled with the Document resource archetype (see clause C.1 of 3GPP TS 29.501 [3]).

5.28.2.3.2 Resource Definition

Resource URI: {apiRoot}/3gpp-ms-event-exposure/v1/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.28.2.3.2-1.

Table 5.28.2.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.28.1.
subscriptionId	string	Contains the unique identifier of the Individual Media Streaming Event Exposure Subscription resource assigned by the NEF.

5.28.2.3.3 Resource Standard Methods

5.28.2.3.3.1 GET

This method allows an AF to retrieve an existing Individual Media Streaming Event Exposure Subscription resource at the NEF.

This method shall support the URI query parameters specified in table 5.28.2.3.3.1-1.

Table 5.28.2.3.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.28.2.3.3.1-2 and the response data structures and response codes specified in table 5.28.2.3.3.1-3.

Table 5.28.2.3.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.28.2.3.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AfEventExposureSubsc	M	1	200 OK	Successful case. The requested Individual Media Streaming Event Exposure Subscription resource is successfully returned.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the GET method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.28.2.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.28.2.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.28.2.3.3.2 PUT

This method enables an AF to request the update of an existing Individual Media Streaming Event Exposure Subscription resource at the NEF.

This method shall support the URI query parameters specified in table 5.28.2.3.3.2-1.

Table 5.28.2.3.3.2-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.28.2.3.3.2-2 and the response data structures and response codes specified in table 5.28.2.3.3.2-3.

Table 5.28.2.3.3.2-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
AfEventExposureSubsc	M	1	Contains the updated representation of the Individual Media Streaming Event Exposure Subscription resource that is to be updated.

Table 5.28.2.3.3.2-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
AfEventExposureSubsc	M	1	200 OK	Successful case. The concerned Individual Media Streaming Event Exposure Subscription resource is successfully updated and a representation of the updated resource is returned in the response body.
n/a			204 No Content	Successful case. The concerned Individual Media Streaming Event Exposure Subscription resource is successfully updated and no content is returned in the response body.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.28.2.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.28.2.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.28.2.3.3.3 DELETE

This method enables an AF to request the deletion of an existing Individual Media Streaming Event Exposure resource at the NEF.

This method shall support the URI query parameters specified in table 5.28.2.3.3.3-1.

Table 5.28.2.3.3.3-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.28.2.3.3.3-2 and the response data structures and response codes specified in table 5.28.2.3.3.3-3.

Table 5.28.2.3.3.3-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.28.2.3.3.3-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response Codes	Description
n/a			204 No Content	Successful response. The Individual Media Streaming Event Exposure resource is successfully deleted.
			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative target URI located in an alternative NEF. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status code for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.28.2.3.3.3-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

Table 5.28.2.3.3.3-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF.

5.28.2.3.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

5.28.3 Custom Operations without associated resources

There are no custom operations without associated resources defined for this API in this release of the specification.

5.28.4 Notifications

5.28.4.1 General

Notifications shall comply to clause 5.2.5 of 3GPP TS 29.122 [4].

Table 5.28.4.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Media Streaming Event Exposure Notification	{notifUri}	POST	This operation enables the NEF to notify a previously subscribed AF on the Media Streaming Exposure Event(s).

5.28.4.2 Media Streaming Event Exposure Notification

5.28.4.2.1 Description

The Media Streaming Event Exposure notification is used by the NEF to report one or several observed Media Streaming event(s) to a previously subscribed AF.

5.28.4.2.2 Target URI

The Callback URI "{notifUri}" shall be used with the callback URI variables defined in table 5.28.4.2.2-1.

Table 5.28.4.2.2-1: Callback URI variables

Name	Definition
notifUri	Callback reference provided by the AF during the creation/update of the corresponding Media Streaming Event Exposure Subscription.

5.28.4.2.3 Operation Definition

5.28.4.2.3.1 Notification via HTTP POST

This method shall support the request data structures specified in table 5.28.4.2.3.1-1 and the response data structures and response codes specified in table 5.28.4.2.3.1-2.

Table 5.28.4.2.3.1-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
AfEventExposureNotif	M	1	Contains the Media Streaming Event Exposure Notification.

Table 5.28.4.2.3.1-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
N/A			204 No Content	The Media Streaming Event Notification is successfully received.
N/A			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
N/A			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI representing the end point of an alternative AF where the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [4].
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [4] also apply.				

Table 5.28.4.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

Table 5.28.4.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative AF towards which the notification should be redirected.

5.28.4.2.3.2 Notification via Websocket

If supported by both AF and NEF and successfully negotiated, the Media Streaming event notification may alternatively be delivered through the Websocket mechanism as defined in clause 5.2.5.4 of 3GPP TS 29.122 [4].

5.28.5 Data Model

5.28.5.1 General

This clause specifies the application data model supported by the MSEventExposure API. Table 5.28.5.1-1 specifies the data types defined for the MSEventExposure API.

Table 5.28.5.1-1: MSEventExposure specific Data Types

Data type	Clause defined	Description	Applicability

Table 5.28.5.1-2 specifies data types re-used by the MSEventExposure API from other specifications, including a reference to their respective specifications, and when needed, a short description of their use within the MSEventExposure API.

Table 5.28.5.1-2: Re-used Data Types

Data type	Reference	Comments	Applicability
AfEventExposureNotif	3GPP TS 29.517 [58]	Represents a Media Streaming event notification.	
AfEventExposureSubsc	3GPP TS 29.517 [58]	Represents a Media Streaming event exposure subscription. Only applicable to the UE application events exposed via Data Collection AF as defined in clause 4.1.1 of 3GPP TS 29.517 [58].	

5.28.5.2 Structured data types

5.28.5.2.1 Introduction

This clause defines the structures to be used in resource representations.

There are no structured data types defined for this API in this release of the specification.

5.28.5.3 Simple data types and enumerations

5.28.5.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.28.5.3.2 Simple data types

The simple data types defined in table 5.28.5.3.2-1 shall be supported.

Table 5.28.5.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.28.6 Used Features

The table below defines the features applicable to the MSEventExposure API. Those features are negotiated as described in clause 5.2.7 of 3GPP TS 29.122 [4].

Table 5.28.6-1: Features used by MSEventExposure API

Feature number	Feature Name	Description

5.28.7 Error handling

5.28.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [4].

In addition, the requirements in the following clauses shall apply.

5.28.7.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MSEventExposure API.

5.28.7.3 Application Errors

The application errors defined for the MSeventExposure API are listed in table 5.28.7.3-1.

Table 5.28.7.3-1: Application errors

Application Error	HTTP status code	Description

6 Security

TLS shall be used to support the security communication between the NEF and the AF over NEF Northbound interface as defined in clause 12 of 3GPP TS 33.501 [6]. The access to the NEFnorthbound APIs shall be authorized by means of OAuth2 protocol (see IETF RFC 6749 [13]), based on local configuration, using the "Client Credentials" authorization grant. If OAuth2 is used, a client, prior to consuming services offered by the NEF Northbound APIs, shall obtain a "token" from the authorization server.

7 Using Common API Framework

7.1 General

When CAPIF is used with an NEF that is used for external exposure, the NEF shall support the following as defined in 3GPP TS 29.222 [12]:

- the API exposing function and related APIs over CAPIF-2/2e and CAPIF-3/3e reference points;
- the API publishing function and related APIs over CAPIF-4/4e reference point;
- the API management function and related APIs over CAPIF-5/5e reference point; and
- at least one of the security methods for authentication and authorization, and related security mechanisms.

In a centralized deployment as defined in 3GPP TS 23.222 [11], where the CAPIF core function and API provider domain functions are co-located, the interactions between the CAPIF core function and API provider domain functions may be independent of CAPIF-3/3e, CAPIF-4/4e and CAPIF-5/5e reference points.

7.2 Security

When CAPIF is used for external exposure, before invoking the API exposed by the NEF, the AF as API invoker shall negotiate the security method (PKI, TLS-PSK or OAUTH2) with CAPIF core function and ensure the NEF has enough credential to authenticate the AF (see 3GPP TS 29.222 [12], clause 5.6.2.2 and clause 6.2.2.2).

If PKI or TLS-PSK is used as the selected security method between the AF and the NEF, upon API invocation, the NEF shall retrieve the authorization information from the CAPIF core function as described in 3GPP TS 29.222 [12], clause 5.6.2.4.

As indicated in 3GPP TS 33.122 [14], the access to the NEF northbound APIs may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [13]), using the "Client Credentials" authorization grant, where the CAPIF core function (see 3GPP TS 29.222 [12]) plays the role of the authorization server.

NOTE 1: In this release, only "Client Credentials" authorization grant is supported.

If OAuth2 is used as the selected security method between the AF and the NEF, the AF, prior to consuming services offered by the NEF northbound APIs, shall obtain a "token" from the authorization server, by invoking the Obtain_Authorization service, as described in 3GPP TS 29.222 [12], clause 5.6.2.3.2.

The NEF northbound APIs do not define any scopes for OAuth2 authorization. It is the NEF responsibility to check whether the AF is authorized to use an API based on the "token". Once the NEF verifies the "token", it shall check whether the NEF identifier in the "token" matches its own published identifier, and whether the API name in the "token" matches its own published API name. If those checks are passed, the AF has full authority to access any resource or operation for the invoked API.

NOTE 2: For aforementioned security methods, the NEF needs to apply admission control according to access control policies after performing the authorization checks.

NOTE 3: The security requirement in the current clause does not apply for the NiddConfigurationTrigger and the MsisdNLessMoSms APIs since they are the NEF initiated interaction with the AF. How the security scheme works for the NiddConfigurationTrigger and MsisdNLessMoSms APIs is left to configuration.

Annex A (normative): OpenAPI representation for NEF Northbound APIs

A.1 General

This Annex is based on the OpenAPI Specification [5] and provides corresponding representations of all APIs defined in the present specification.

NOTE 1: An OpenAPIs representation embeds JSON Schema representations of HTTP message bodies.

This Annex shall take precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

NOTE 2: The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository that uses the GitLab software version control system (see clause 5B of the 3GPP TR 21.900 [21] and clause 5.3.1 of the 3GPP TS 29.501 [32] for further information).

A.2 TrafficInfluence API

```
openapi: 3.0.0
info:
  title: 3gpp-traffic-influence
  version: 1.2.1
  description: |
    API for AF traffic influence
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: >
    3GPP TS 29.522 V17.7.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
security:
  - {}
  - oAuth2ClientCredentials: []
servers:
  - url: '{apiRoot}/3gpp-traffic-influence/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /{afId}/subscriptions:
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
    get:
      summary: read all of the active subscriptions for the AF
      operationId: ReadAllSubscriptions
      tags:
        - Traffic Influence Subscription
      responses:
        '200':
          description: OK.
          content:
            application/json:
              schema:
                type: array
                items:
```

```

    $ref: '#/components/schemas/TrafficInfluSub'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

post:

```

summary: Creates a new subscription resource
operationId: CreateNewSubscription
tags:
  - Traffic Influence Subscription
requestBody:
  description: Request to create a new subscription resource
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/TrafficInfluSub'
callbacks:
  notificationDestination:
    '{request.body#/notificationDestination}':
      post:
        requestBody: # contents of the callback message
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/EventNotification'
  callbacks:
    afAcknowledgement:
      '{request.body#/afAckUri}':
        post:
          requestBody: # contents of the callback message
            required: true
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/AfAckInfo'
  responses:
    '204':
      description: No Content (successful acknowledgement)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':

```

```

        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'
responses:
  '204':
    description: No Content (successful notification)
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
responses:
  '201':
    description: Created (Successful creation of subscription)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/TrafficInfluSub'
    headers:
      Location:
        description: Contains the URI of the newly created resource.
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
/{afId}/subscriptions/{subscriptionId}:
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true

```

```

    schema:
      type: string
  - name: subscriptionId
    in: path
    description: Identifier of the subscription resource
    required: true
    schema:
      type: string
get:
  summary: read an active subscriptions for the SCS/AS and the subscription Id
  operationId: ReadAnSubscription
  tags:
    - Individual Traffic Influence Subscription
  responses:
    '200':
      description: OK (Successful get the active subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/TrafficInfluSub'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Fully updates/replaces an existing subscription resource
  operationId: FullyUpdateAnSubscription
  tags:
    - Individual Traffic Influence Subscription
  requestBody:
    description: Parameters to update/replace the existing subscription
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/TrafficInfluSub'
  responses:
    '200':
      description: OK (Successful update of the subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/TrafficInfluSub'
    '204':
      description: No Content
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'

```

```
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
```

patch:

- summary: Partially updates/replaces an existing subscription resource
- operationId: PartialUpdateAnSubscription
- tags:
 - Individual Traffic Influence Subscription
- requestBody:
 - required: true
 - content:
 - application/merge-patch+json:
 - schema:
 - \$ref: '#/components/schemas/TrafficInfluSubPatch'
- responses:
 - '200':
 - description: OK. The subscription was modified successfully.
 - content:
 - application/json:
 - schema:
 - \$ref: '#/components/schemas/TrafficInfluSub'
 - '204':
 - description: No Content
 - '307':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/307'
 - '308':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/308'
 - '400':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/400'
 - '401':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/401'
 - '403':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/403'
 - '404':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/404'
 - '411':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/411'
 - '413':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/413'
 - '415':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/415'
 - '429':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/429'
 - '500':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/500'
 - '503':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/503'
 - default:
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/default'


```

'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    TrafficInfluSub:
      description: Represents a traffic influence subscription.
      type: object
      properties:
        afServiceId:
          type: string
          description: Identifies a service on behalf of which the AF is issuing the request.
        afAppId:
          type: string
          description: Identifies an application.
        afTransId:
          type: string
          description: Identifies an NEF Northbound interface transaction, generated by the AF.
        appReloInd:
          type: boolean
          description: >
            Identifies whether an application can be relocated once a location of
            the application has been selected.
        dnn:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
        snssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        externalGroupId:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
        anyUeInd:
          type: boolean
          description: >
            Identifies whether the AF request applies to any UE. This attribute shall
            set to "true" if applicable for any UE, otherwise, set to "false".
        subscribedEvents:
          type: array
          items:
            $ref: '#/components/schemas/SubscribedEvent'
          minItems: 1
          description: Identifies the requirement to be notified of the event(s).
        gpsi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
        ipv4Addr:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv4Addr'
        ipDomain:
          type: string
        ipv6Addr:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv6Addr'
        macAddr:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
        dnaiChgType:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DnaiChangeType'
        notificationDestination:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
        requestTestNotification:
          type: boolean
          description: >
            Set to true by the SCS/AS to request the NEF to send a test notification
            as defined in clause 5.2.5.3. Set to false or omitted otherwise.
        websocketNotifConfig:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
        self:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'

```

```

trafficFilters:
  type: array
  items:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/FlowInfo'
  minItems: 1
  description: Identifies IP packet filters.
ethTrafficFilters:
  type: array
  items:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/EthFlowDescription'
  minItems: 1
  description: Identifies Ethernet packet filters.
trafficRoutes:
  type: array
  items:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/RouteToLocation'
  minItems: 1
  description: Identifies the N6 traffic routing requirement.
tfcCorrInd:
  type: boolean
tempValidities:
  type: array
  items:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/TemporalValidity'
validGeoZoneIds:
  type: array
  items:
    type: string
  minItems: 1
  description: >
    Identifies a geographic zone that the AF request applies only to the traffic
    of UE(s) located in this specific zone.
  deprecated: true
geoAreas:
  type: array
  items:
    $ref: 'TS29522_AMPolicyAuthorization.yaml#/components/schemas/GeographicalArea'
  minItems: 1
  description: Identifies geographical areas within which the AF request applies.
afAckInd:
  type: boolean
addrPreserInd:
  type: boolean
simConnInd:
  type: boolean
  description: >
    Indicates whether simultaneous connectivity should be temporarily
    maintained for the source and target PSA.
simConnTerm:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
maxAllowedUpLat:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
easIpReplaceInfos:
  type: array
  items:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/EasIpReplacementInfo'
  minItems: 1
  description: Contains EAS IP replacement information.
easRedisInd:
  type: boolean
  description: Indicates the EAS rediscovery is required for the application if it is
included and set to "true".
eventReq:
  $ref: 'TS29523_Npcf_EventExposure.yaml#/components/schemas/ReportingInformation'
eventReports:
  type: array
  items:
    $ref: '#/components/schemas/EventNotification'
  minItems: 1
suppFeat:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
allOf:
  - oneOf:
    - required: [afAppId]
    - required: [trafficFilters]
    - required: [ethTrafficFilters]
  - oneOf:
    - required: [ipv4Addr]

```

```
- required: [ipv6Addr]
- required: [macAddr]
- required: [gpsi]
- required: [externalGroupId]
- required: [anyUeInd]
anyOf:
- not:
  required: [subscribedEvents]
- required: [notificationDestination]
TrafficInfluSubPatch:
description: >
  Represents parameters to request the modification of a traffic influence
  subscription resource.
type: object
properties:
  appReloInd:
    type: boolean
    description: >
      Identifies whether an application can be relocated once a location of
      the application has been selected.
    nullable: true
  trafficFilters:
    type: array
    items:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/FlowInfo'
    minItems: 1
    description: Identifies IP packet filters.
  ethTrafficFilters:
    type: array
    items:
      $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/EthFlowDescription'
    minItems: 1
    description: Identifies Ethernet packet filters.
  trafficRoutes:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/RouteToLocation'
    minItems: 1
    description: Identifies the N6 traffic routing requirement.
  tfcCorrInd:
    type: boolean
    nullable: true
  tempValidities:
    type: array
    items:
      $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/TemporalValidity'
    minItems: 1
    nullable: true
  validGeoZoneIds:
    type: array
    items:
      type: string
    minItems: 1
    description: >
      Identifies a geographic zone that the AF request applies only to the traffic
      of UE(s) located in this specific zone.
    nullable: true
    deprecated: true
  geoAreas:
    type: array
    items:
      $ref: 'TS29522_AMPolicyAuthorization.yaml#/components/schemas/GeographicalArea'
    minItems: 1
    description: Identifies geographical areas within which the AF request applies.
    nullable: true
  afAckInd:
    type: boolean
    nullable: true
  addrPreserInd:
    type: boolean
    nullable: true
  simConnInd:
    type: boolean
    description: >
      Indicates whether simultaneous connectivity should be temporarily maintained
      for the source and target PSA.
  simConnTerm:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
```

```

maxAllowedUpLat:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/UIntegerRm'
easIpReplaceInfos:
  type: array
  items:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/EasIpReplacementInfo'
  minItems: 1
  description: Contains EAS IP replacement information.
  nullable: true
easRedisInd:
  type: boolean
  description: Indicates the EAS rediscovery is required for the application if it is
included and set to "true".
notificationDestination:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
eventReq:
  $ref: 'TS29523_Npcf_EventExposure.yaml#/components/schemas/ReportingInformation'
EventNotification:
  description: Represents a traffic influence event notification.
  type: object
  properties:
    afTransId:
      type: string
      description: Identifies an NEF Northbound interface transaction, generated by the AF.
    dnaiChgType:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/DnaiChangeType'
    sourceTrafficRoute:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/RouteToLocation'
    subscribedEvent:
      $ref: '#/components/schemas/SubscribedEvent'
    targetTrafficRoute:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/RouteToLocation'
    sourceDnai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnai'
    targetDnai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnai'
    gpsi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
    srcUeIpv4Addr:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv4Addr'
    srcUeIpv6Prefix:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Prefix'
    tgtUeIpv4Addr:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Ipv4Addr'
    tgtUeIpv6Prefix:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Prefix'
    ueMac:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
    afAckUri:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
  required:
    - dnaiChgType
    - subscribedEvent
AfResultInfo:
  description: Identifies the result of application layer handling.
  type: object
  properties:
    afStatus:
      $ref: '#/components/schemas/AfResultStatus'
    trafficRoute:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/RouteToLocation'
    upBuffInd:
      type: boolean
      description: >
        If present and set to "true" it indicates that buffering of uplink traffic
        to the target DNAI is needed.
    easIpReplaceInfos:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/EasIpReplacementInfo'
      minItems: 1
      description: Contains EAS IP replacement information.
  required:
    - afStatus
AfAckInfo:
  description: Represents acknowledgement information of a traffic influence event notification.
  type: object
  properties:

```

```

    afTransId:
      type: string
    ackResult:
      $ref: '#/components/schemas/AfResultInfo'
    gpsi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
    required:
      - ackResult
  SubscribedEvent:
    anyOf:
      - type: string
        enum:
          - UP_PATH_CHANGE
      - type: string
        description: >
          This string provides forward-compatibility with future extensions to the enumeration but
          is not used to encode content defined in the present version of this API.
        description: |
          Possible values are:
          - UP_PATH_CHANGE: The AF requests to be notified when the UP path changes for the PDU
session.
  AfResultStatus:
    anyOf:
      - type: string
        enum:
          - SUCCESS
          - TEMPORARY_CONGESTION
          - RELOC_NO_ALLOWED
          - OTHER
      - type: string
        description: >
          This string provides forward-compatibility with future extensions to the enumeration but
          is not used to encode content defined in the present version of this API.
        description: |
          Possible values are:
          - SUCCESS: The application layer is ready or the relocation is completed.
          - TEMPORARY_CONGESTION: The application relocation fails due to temporary congestion.
          - RELOC_NO_ALLOWED: The application relocation fails because application relocation is not
allowed.
          - OTHER: The application relocation fails due to other reason.

```

A.3 NiddConfigurationTrigger API

```

openapi: 3.0.0
info:
  title: 3gpp-nidd-configuration-trigger
  version: 1.1.1
  description: |
    API for NIDD Configuration Trigger.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: >
    3GPP TS 29.522 V17.7.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
security:
  - {}
  - oAuth2ClientCredentials: []
servers:
  - url: '{apiRoot}'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /:
    post:
      operationId: NiddConfigurationTrigger
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NiddConfigurationTrigger'

```

```

responses:
  '200':
    description: Success
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NiddConfigurationTriggerReply'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    NiddConfigurationTrigger:
      description: Represents a NIDD configuration trigger.
      type: object
      properties:
        afId:
          type: string
          description: Identifies the trigger receiving entity.
        nefId:
          type: string
          description: Identifies the trigger sending entity.
        gpsi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
        suppFeat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      required:
        - afId
        - nefId
        - gpsi
        - suppFeat
    NiddConfigurationTriggerReply:
      description: Represents a reply to a NIDD configuration trigger.
      type: object
      properties:
        suppFeat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      required:
        - suppFeat

```

A.4 AnalyticsExposure API

openapi: 3.0.0
info:

```

title: 3gpp-analyticsexposure
version: 1.1.2
description: |
  API for Analytics Exposure.
  © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
  All rights reserved.
externalDocs:
  description: >
    3GPP TS 29.522 V17.8.0: 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
security:
  - {}
  - oAuth2ClientCredentials: []
servers:
  - url: '{apiRoot}/3gpp-analyticsexposure/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /{afId}/subscriptions:
    get:
      summary: read all of the active subscriptions for the AF
      operationId: ReadAllSubscriptions
      tags:
        - Analytics Exposure Subscriptions
      parameters:
        - name: afId
          in: path
          description: Identifier of the AF
          required: true
          schema:
            type: string
        - name: supp-feat
          in: query
          description: Features supported by the NF service consumer
          required: false
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      responses:
        '200':
          description: OK (Successful get all of the active subscriptions for the AF)
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/AnalyticsExposureSubsc'
                minItems: 0
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'
    post:
      summary: Creates a new subscription resource
      operationId: CreateNewSubscription
      tags:
        - Analytics Exposure Subscriptions
      parameters:

```

```

- name: afId
  in: path
  description: Identifier of the AF
  required: true
  schema:
    type: string
requestBody:
  description: new subscription creation
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/AnalyticsExposureSubsc'
callbacks:
  notification:
    '{request.body#/notifUri}':
      post:
        requestBody: # contents of the callback message
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AnalyticsEventNotification'
        responses:
          '204':
            description: No Content (successful notification)
          '307':
            $ref: 'TS29122_CommonData.yaml#/components/responses/307'
          '308':
            $ref: 'TS29122_CommonData.yaml#/components/responses/308'
          '400':
            $ref: 'TS29122_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29122_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29122_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29122_CommonData.yaml#/components/responses/404'
          '411':
            $ref: 'TS29122_CommonData.yaml#/components/responses/411'
          '413':
            $ref: 'TS29122_CommonData.yaml#/components/responses/413'
          '415':
            $ref: 'TS29122_CommonData.yaml#/components/responses/415'
          '429':
            $ref: 'TS29122_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29122_CommonData.yaml#/components/responses/500'
          '503':
            $ref: 'TS29122_CommonData.yaml#/components/responses/503'
          default:
            $ref: 'TS29122_CommonData.yaml#/components/responses/default'
responses:
  '201':
    description: Created (Successful creation)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/AnalyticsExposureSubsc'
    headers:
      Location:
        description: Contains the URI of the newly created resource.
        required: true
        schema:
          type: string
  '204':
    description: >
      Successful case. The resource has been successfully created and no additional
      content is to be sent in the response message.
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':

```



```

    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```
/{afId}/subscriptions/{subscriptionId}:
```

```
get:
```

```

  summary: read an active subscription for the AF and the subscription Id
  operationId: ReadAnSubscription
  tags:
    - Individual Analytics Exposure Subscription
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true
      schema:
        type: string
    - name: supp-feat
      in: query
      description: Features supported by the NF service consumer
      required: false
      schema:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  responses:
    '200':
      description: OK (Successful get the active subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AnalyticsExposureSubsc'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```
put:
```

```

  summary: Fully updates/replaces an existing subscription resource
  operationId: FullyUpdateAnSubscription
  tags:
    - Individual Analytics Exposure Subscription
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF

```

```

    required: true
    schema:
      type: string
  - name: subscriptionId
    in: path
    description: Identifier of the subscription resource
    required: true
    schema:
      type: string
requestBody:
  description: Parameters to update/replace the existing subscription
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/AnalyticsExposureSubsc'
responses:
  '200':
    description: OK (Successful deletion of the existing subscription)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/AnalyticsExposureSubsc'
  '204':
    description: >
      Successful case. The resource has been successfully updated and no additional
      content is to be sent in the response message.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes an already existing subscription
  operationId: DeleteAnSubscription
  tags:
    - Individual Analytics Exposure Subscription
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true
      schema:
        type: string
  responses:
    '204':
      description: No Content (Successful deletion of the existing subscription)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{afId}/fetch:
  post:
    summary: Fetch analytics information
    operationId: FetchAnalyticsInfo
    tags:
      - AnalyticsExposure API Fetch analytics information
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
    requestBody:
      required: true
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AnalyticsRequest'
    responses:
      '200':
        description: The requested information was returned successfully.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/AnalyticsData'
      '204':
        description: No Content (The requested Analytics data does not exist)
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29122_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        description: >
          The request is rejected by the NEF and more details (not only the ProblemDetails)
          are returned.
        content:
          application/problem+json:
            schema:
              $ref:
'TS29520_Nnwdaf_AnalyticsInfo.yaml#/components/schemas/ProblemDetailsAnalyticsInfoRequest'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:

```

```
$ref: 'TS29122_CommonData.yaml#/components/responses/default'
```

```
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    AnalyticsExposureSubsc:
      description: Represents an analytics exposure subscription.
      type: object
      properties:
        analyEventsSubs:
          type: array
          items:
            $ref: '#/components/schemas/AnalyticsEventSubsc'
          minItems: 1
        analyRepInfo:
          $ref: 'TS29523_Npcf_EventExposure.yaml#/components/schemas/ReportingInformation'
        notifUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        notifId:
          type: string
        eventNotifis:
          type: array
          items:
            $ref: '#/components/schemas/AnalyticsEventNotif'
          minItems: 1
        failEventReports:
          type: array
          items:
            $ref: '#/components/schemas/AnalyticsFailureEventInfo'
          minItems: 1
        suppFeat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        self:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
        requestTestNotification:
          type: boolean
          description: >
            Set to true by the AF to request the NEF to send a test notification
            as defined in clause 5.2.5.3 of 3GPP TS 29.122. Set to false or omitted otherwise.
        websocketNotifConfig:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
      required:
        - analyEventsSubs
        - notifUri
        - notifId
    AnalyticsEventNotification:
      description: Represents an analytics event(s) notification.
      type: object
      properties:
        notifId:
          type: string
        analyEventNotifs:
          type: array
          items:
            $ref: '#/components/schemas/AnalyticsEventNotif'
          minItems: 1
      required:
        - notifId
        - analyEventNotifs
    AnalyticsEventNotif:
      description: Represents an analytics event to be reported.
      type: object
      properties:
        analyEvent:
          $ref: '#/components/schemas/AnalyticsEvent'
        expiry:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
        timeStamp:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
        failNotifyCode:
          $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NwdafFailureCode'
        rvWaitTime:
```

```

    $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
  ueMobilityInfos:
    type: array
    items:
      $ref: '#/components/schemas/UeMobilityExposure'
    minItems: 1
  ueCommInfos:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/UeCommunication'
    minItems: 1
  abnormalInfos:
    type: array
    items:
      $ref: '#/components/schemas/AbnormalExposure'
    minItems: 1
  congestInfos:
    type: array
    items:
      $ref: '#/components/schemas/CongestInfo'
    minItems: 1
  nwPerfInfos:
    type: array
    items:
      $ref: '#/components/schemas/NetworkPerfExposure'
    minItems: 1
  qosSustainInfos:
    type: array
    items:
      $ref: '#/components/schemas/QosSustainabilityExposure'
    minItems: 1
  disperInfos:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/DispersionInfo'
    minItems: 1
  dnPerfInfos:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/DnPerfInfo'
    minItems: 1
  svcExps:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/ServiceExperienceInfo'
    minItems: 1
  start:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
  timeStampGen:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
  required:
    - analyEvent
    - timeStamp
  AnalyticsEventSubsc:
    description: Represents a subscribed analytics event.
    type: object
    properties:
      analyEvent:
        $ref: '#/components/schemas/AnalyticsEvent'
      analyEventFilter:
        $ref: '#/components/schemas/AnalyticsEventFilterSubsc'
      tgtUe:
        $ref: '#/components/schemas/TargetUeId'
    required:
      - analyEvent
  AnalyticsEventFilterSubsc:
    description: Represents an analytics event filter.
    type: object
    properties:
      nwPerfReqs:
        type: array
        items:
          $ref:
' TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NetworkPerfRequirement '
        minItems: 1
      locArea:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea5G'
      appIds:

```

```

    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationId'
    minItems: 1
  dnn:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
  dnais:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnai'
    minItems: 1
  excepRequs:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/Exception'
    minItems: 1
  exptAnaType:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/ExpectedAnalyticsType'
  exptUeBehav:
    $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/ExpectedUeBehaviourData'
  matchingDir:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/MatchingDirection'
  reptThlds:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/ThresholdLevel'
    minItems: 1
  snssai:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
  nsiIdInfos:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NsiIdInfo'
    minItems: 1
  qosReq:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/QosRequirement'
  qosFlowRetThds:
    type: array
    items:
      $ref:
'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/RetainabilityThreshold'
    minItems: 1
  ranUeThrouThds:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
    minItems: 1
  disperReqs:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/DispersionRequirement'
    minItems: 1
  listOfAnaSubsets:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/AnalyticsSubset'
    minItems: 1
  dnPerfReqs:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/DnPerformanceReq'
    minItems: 1
  bwRequs:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/BwRequirement'
    minItems: 1
  ratFreqs:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/RatFreqInformation'
    minItems: 1
  appServerAddrs:
    type: array
    items:
      $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AddrFqdn'
    minItems: 1
  extraReportReq:

```

```

    $ref:
'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/EventReportingRequirement'
    maxNumOfTopAppUl:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    maxNumOfTopAppDl:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    visitedLocAreas:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea5G'
      minItems: 1
  TargetUeId:
    description: Represents the target UE(s) information.
    type: object
    properties:
      anyUeInd:
        type: boolean
      gpsi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      exterGroupId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
  UeMobilityExposure:
    description: Represents a UE mobility information.
    type: object
    properties:
      ts:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
      recurringTime:
        $ref: 'TS29122_CpProvisioning.yaml#/components/schemas/ScheduledCommunicationTime'
      duration:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
      durationVariance:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Float'
      locInfo:
        type: array
        items:
          $ref: '#/components/schemas/UeLocationInfo'
        minItems: 1
    required:
      - duration
      - locInfo
  UeLocationInfo:
    description: Represents a UE location information.
    type: object
    properties:
      loc:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea5G'
      ratio:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SamplingRatio'
      confidence:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    required:
      - loc
  AnalyticsRequest:
    description: Represents the parameters to request to retrieve analytics information.
    type: object
    properties:
      analyEvent:
        $ref: '#/components/schemas/AnalyticsEvent'
      analyEventFilter:
        $ref: '#/components/schemas/AnalyticsEventFilter'
      analyRep:
        $ref:
'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/EventReportingRequirement'
      tgtUe:
        $ref: '#/components/schemas/TargetUeId'
      suppFeat:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    required:
      - analyEvent
      - suppFeat
  AnalyticsEventFilter:
    description: Represents analytics event filter information.
    type: object
    properties:
      locArea:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea5G'
      dnn:

```

```

    $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
  dnais:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnai'
    minItems: 1
  nwPerfTypes:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NetworkPerfType'
    minItems: 1
  appIds:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationId'
    minItems: 1
  excepIds:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/ExceptionId'
    minItems: 1
  exptAnaType:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/ExpectedAnalyticsType'
  exptUeBehav:
    $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/ExpectedUeBehaviourData'
  snssai:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
  nsiIdInfos:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NsiIdInfo'
    minItems: 1
  qosReq:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/QosRequirement'
  listOfAnaSubsets:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/AnalyticsSubset'
    minItems: 1
  dnPerfReqs:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/DnPerformanceReq'
    minItems: 1
  bwRequs:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/BwRequirement'
    minItems: 1
  ratFreqs:
    type: array
    items:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/RatFreqInformation'
    minItems: 1
  appServerAdrs:
    type: array
    items:
      $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AddrFqdn'
    minItems: 1
  maxNumOfTopAppUl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
  maxNumOfTopAppDl:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
  visitedLocAreas:
    type: array
    items:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea5G'
    minItems: 1
  AnalyticsData:
    description: Represents analytics data.
    type: object
    properties:
      start:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      expiry:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      timeStampGen:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'

```



```
ueMobilityInfos:
  type: array
  items:
    $ref: '#/components/schemas/UeMobilityExposure'
  minItems: 1
ueCommInfos:
  type: array
  items:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/UeCommunication'
  minItems: 1
nwPerfInfos:
  type: array
  items:
    $ref: '#/components/schemas/NetworkPerfExposure'
  minItems: 1
abnormalInfos:
  type: array
  items:
    $ref: '#/components/schemas/AbnormalExposure'
  minItems: 1
congestInfos:
  type: array
  items:
    $ref: '#/components/schemas/CongestInfo'
  minItems: 1
qosSustainInfos:
  type: array
  items:
    $ref: '#/components/schemas/QosSustainabilityExposure'
  minItems: 1
disperInfos:
  type: array
  items:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/DispersionInfo'
  minItems: 1
dnPerfInfos:
  type: array
  items:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/DnPerfInfo'
  minItems: 1
svcExps:
  type: array
  items:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/ServiceExperienceInfo'
  minItems: 1
disperReqs:
  type: array
  items:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/DispersionRequirement'
  minItems: 1
suppFeat:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
required:
- suppFeat
NetworkPerfExposure:
  description: Represents network performance information.
  type: object
  properties:
    locArea:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea5G'
    nwPerfType:
      $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/NetworkPerfType'
    relativeRatio:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SamplingRatio'
    absoluteNum:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
    confidence:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
  required:
  - locArea
  - nwPerfType
AbnormalExposure:
  description: Represents a user's abnormal behavior information.
  type: object
  properties:
    gpsis:
      type: array
      items:
```

```

    $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
  minItems: 1
  appId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationId'
  dnn:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
  snssai:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
  excep:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/Exception'
  ratio:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/SamplingRatio'
  confidence:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
  addtMeasInfo:
    $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/AdditionalMeasurement'
  required:
    - excep
  CongestInfo:
    description: Represents a UE's user data congestion information.
    type: object
    properties:
      locArea:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea5G'
      cngAnas:
        type: array
        items:
          $ref: '#/components/schemas/CongestionAnalytics'
        minItems: 1
    required:
      - locArea
      - cngAnas
  CongestionAnalytics:
    description: >
      Represents data congestion analytics for transfer over the user plane,
      control plane or both.
    type: object
    properties:
      cngType:
        $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/CongestionType'
      tmWdw:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
      nsi:
        $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/ThresholdLevel'
      confidence:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
      topAppListUl:
        type: array
        items:
          $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/TopApplication'
        minItems: 1
      topAppListDl:
        type: array
        items:
          $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/TopApplication'
        minItems: 1
    required:
      - cngType
      - tmWdw
      - nsi
  QoSustainabilityExposure:
    description: Represents a QoS sustainability information.
    type: object
    properties:
      locArea:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea5G'
      startTs:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
      endTs:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
      qosFlowRetThd:
        $ref: 'TS29520_Nnwdaf_EventsSubscription.yaml#/components/schemas/RetainabilityThreshold'
      ranUeThrouThd:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
      snssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      confidence:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'

```

```

required:
  - locArea
  - startTs
  - endTs
AnalyticsFailureEventInfo:
  description: >
    Represents an event for which the subscription request was not successful
    and including the associated failure reason.
  type: object
  properties:
    event:
      $ref: '#/components/schemas/AnalyticsEvent'
    failureCode:
      $ref: '#/components/schemas/AnalyticsFailureCode'
  required:
    - event
    - failureCode
AnalyticsEvent:
  anyOf:
    - type: string
      enum:
        - UE_MOBILITY
        - UE_COMM
        - ABNORMAL_BEHAVIOR
        - CONGESTION
        - NETWORK_PERFORMANCE
        - QOS_SUSTAINABILITY
        - DISPERSION
        - DN_PERFORMANCE
        - SERVICE_EXPERIENCE
    - type: string
      description: >
        This string provides forward-compatibility with future
        extensions to the enumeration but is not used to encode
        content defined in the present version of this API.
      description: |
        Possible values are:
        - UE_MOBILITY: The AF requests to be notified about analytics information of UE mobility.
        - UE_COMM: The AF requests to be notified about analytics information of UE communication.
        - ABNORMAL_BEHAVIOR: The AF requests to be notified about analytics information of UE's
        abnormal behavior.
        - CONGESTION: The AF requests to be notified about analytics information of user data
        congestion information.
        - NETWORK_PERFORMANCE: The AF requests to be notified about analytics information of network
        performance.
        - QOS_SUSTAINABILITY: The AF requests to be notified about analytics information of QoS
        sustainability.
        - DISPERSION: The AF requests to be notified about analytics information of Dispersion
        analytics.
        - DN_PERFORMANCE: The AF requests to be notified about analytics information of DN
        performance.
        - SERVICE_EXPERIENCE: The AF requests to be notified about analytics information of service
        experience.
AnalyticsFailureCode:
  anyOf:
    - type: string
      enum:
        - UNAVAILABLE_DATA
        - BOTH_STAT_PRED_NOT_ALLOWED
        - UNSATISFIED_REQUESTED_ANALYTICS_TIME
        - OTHER
    - type: string
      description: >
        This string provides forward-compatibility with future
        extensions to the enumeration but is not used to encode
        content defined in the present version of this API.
      description: |
        Possible values are:
        - UNAVAILABLE_DATA: The event is rejected since necessary data to perform the service is
        unavailable.
        - BOTH_STAT_PRED_NOT_ALLOWED: The event is rejected since the start time is in the past and
        the end time is in the future, which means the NF service consumer requested both statistics and
        prediction for the analytics.
        - UNSATISFIED_REQUESTED_ANALYTICS_TIME: Indicates that the requested event is rejected since
        the analytics information is not ready when the time indicated by the timeAnaNeeded attribute (as
        provided during the creation or modification of subscription) is reached.
        - OTHER: The event is rejected due to other reasons.

```

A.5 5GLANParameterProvision API

openapi: 3.0.0

info:

```
title: 3gpp-5glan-pp
version: 1.1.2
description: |
  API for 5G LAN Parameter Provision.
  © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
  All rights reserved.
```

externalDocs:

```
description: >
  3GPP TS 29.522 V17.14.0; 5G System; Network Exposure Function Northbound APIs.
url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
```

security:

```
- {}
- oAuth2ClientCredentials: []
```

servers:

```
- url: '{apiRoot}/3gpp-5glan-pp/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
```

paths:

```
/{afId}/subscriptions:
  get:
    summary: read all of the active subscriptions for the AF
    operationId: RealAllSubscriptions
    tags:
      - 5GLAN Parameters Provision Subscriptions
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK (Successful get all of the active subscriptions for the AF)
        content:
          application/json:
            schema:
              type: array
              items:
                $ref: '#/components/schemas/5GLanParametersProvision'
              minItems: 0
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29122_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

  post:
    summary: Creates a new subscription resource
```

```

operationId: CreateAnSubscription
tags:
  - 5GLAN Parameters Provision Subscriptions
parameters:
  - name: afId
    in: path
    description: Identifier of the AF
    required: true
    schema:
      type: string
requestBody:
  description: new subscription creation
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/5GLanParametersProvision'
responses:
  '201':
    description: Created (Successful creation)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/5GLanParametersProvision'
    headers:
      Location:
        description: Contains the URI of the newly created resource.
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{afId}/subscriptions/{subscriptionId}:
get:
  summary: read an active subscription for the AF and the subscription Id
  operationId: ReadAnSubscription
  tags:
    - Individual 5GLAN Parameters Provision Subscription
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true
      schema:
        type: string
  responses:
    '200':
      description: OK (Successful get the active subscription)
      content:
        application/json:
          schema:

```

```

    $ref: '#/components/schemas/5GLanParametersProvision'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

put:

```

summary: Fully updates/replaces an existing subscription resource
operationId: FullyUpdateAnSubscription
tags:
  - Individual 5GLAN Parameters Provision Subscription
parameters:
  - name: afId
    in: path
    description: Identifier of the AF
    required: true
    schema:
      type: string
  - name: subscriptionId
    in: path
    description: Identifier of the subscription resource
    required: true
    schema:
      type: string
requestBody:
  description: Parameters to update/replace the existing subscription
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/5GLanParametersProvision'
responses:
  '200':
    description: OK (Successful deletion of the existing subscription)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/5GLanParametersProvision'
  '204':
    description: >
      Successful case. The resource has been successfully updated and no additional
      content is to be sent in the response message.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'

```

```
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
```

patch:

- summary: Partial updates an existing subscription resource
- operationId: PartialUpdateAnSubscription
- tags:
 - Individual 5GLAN Parameters Provision Subscription
- parameters:
 - name: afId
 - in: path
 - description: Identifier of the AF
 - required: true
 - schema:
 - type: string
 - name: subscriptionId
 - in: path
 - description: Identifier of the subscription resource
 - required: true
 - schema:
 - type: string
- requestBody:
 - required: true
 - content:
 - application/merge-patch+json:
 - schema:
 - \$ref: '#/components/schemas/5GLanParametersProvisionPatch'
- responses:
 - '200':
 - description: OK. The subscription was modified successfully.
 - content:
 - application/json:
 - schema:
 - \$ref: '#/components/schemas/5GLanParametersProvision'
 - '204':
 - description: >
Successful case. The resource has been successfully updated and no additional content is to be sent in the response message.
 - '307':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/307'
 - '308':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/308'
 - '400':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/400'
 - '401':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/401'
 - '403':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/403'
 - '404':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/404'
 - '411':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/411'
 - '413':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/413'
 - '415':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/415'
 - '429':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/429'
 - '500':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/500'
 - '503':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/503'
 - default:
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:

- summary: Deletes an already existing subscription
- operationId: DeleteAnSubscription
- tags:
 - Individual 5GLAN Parameters Provision Subscription
- parameters:
 - name: afId

```

    in: path
    description: Identifier of the AF
    required: true
    schema:
      type: string
  - name: subscriptionId
    in: path
    description: Identifier of the subscription resource
    required: true
    schema:
      type: string
responses:
  '204':
    description: No Content (Successful deletion of the existing subscription)
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    5GLanParametersProvision:
      description: Represents an individual 5G LAN parameters provision subscription resource.
      type: object
      properties:
        self:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
        5gLanParams:
          $ref: '#/components/schemas/5GLanParameters'
        suppFeat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      required:
        - 5gLanParams
        - suppFeat
    5GLanParametersProvisionPatch:
      description: >
        Represents the 5G LAN parameters to request the modification of a subscription
        to provision parameters.
      type: object
      properties:
        5gLanParamsPatch:
          $ref: '#/components/schemas/5GLanParametersPatch'
        5gLanParams:
          $ref: '#/components/schemas/5GLanParameters'
    5GLanParameters:
      description: Represents 5G LAN service related parameters that need to be provisioned.
      type: object
      properties:
        exterGroupId:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
        gpsi:
          type: object
          additionalProperties:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'

```



```

    minProperties: 1
    description: >
      Contains the list of 5G VN Group members, each member is identified by GPSI.
      Any string value can be used as a key of the map.
  dnn:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
  aaaIpv4Addr:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
  aaaIpv6Addr:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Addr'
  aaaUsgs:
    type: array
    items:
      $ref: '#/components/schemas/AaaUsage'
    minItems: 1
  mtcProviderId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/MtcProviderInformation'
  snssai:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
  sessionType:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionType'
  sessionTypes:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/PduSessionType'
    minItems: 1
    description: Further allowed PDU Session types.
  appDesps:
    type: object
    additionalProperties:
      $ref: '#/components/schemas/AppDescriptor'
    minProperties: 1
    description: Describes the operation systems and the corresponding applications for each
operation systems. The key of map is osId.
  required:
  - exterGroupId
  - gpsis
  - dnn
  - snssai
  - sessionType
  - appDesps

5GLanParametersPatch:
  deprecated: true
  description: Represents 5G LAN service related parameters that need to be modified.
  type: object
  properties:
    gpsis:
      type: object
      additionalProperties:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/GpsiRm'
      minProperties: 1
      description: >
        Contains the list of 5G VN Group members, each member is identified by GPSI.
        Any string value can be used as a key of the map.
    appDesps:
      type: object
      additionalProperties:
        $ref: '#/components/schemas/AppDescriptorRm'
      minProperties: 1
      description: >
        Describes the operation systems and the corresponding applications for
each operation systems. The key of map is osId.

AppDescriptor:
  description: Represents an operation system and the corresponding applications.
  type: object
  properties:
    osId:
      $ref: 'TS29519_Policy_Data.yaml#/components/schemas/OsId'
    appIds:
      type: object
      additionalProperties:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationId'
      minProperties: 1
      description: >
        Identifies applications that are running on the UE's operating system.
        Any string value can be used as a key of the map.

```

```

required:
- osId
- appIds

AppDescriptorRm:
description: >
  Represents the same as the AppDescriptor data type but with the nullable:true
  property.
type: object
properties:
  appIds:
    type: object
    additionalProperties:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationIdRm'
    minProperties: 1
    description: >
      Identifies applications that are running on the UE's operating system.
      Any string value can be used as a key of the map.

AaaUsage:
anyOf:
- type: string
  enum:
    - AUTH
    - IP_ALLOC
- type: string
  description: >
    This string identifies the usage of secondary authentication/authorization,
    and/or UE IP address allocation from the DN-AAA server.
description: |
  Possible values are:
  - AUTH: secondary authentication/authorization needed from DN-AAA server.
  - IP_ALLOC: UE IP address allocation needed from DN-AAA server.

```

A.6 ApplyingBdtPolicy API

```

openapi: 3.0.0
info:
  title: 3gpp-applying-bdt-policy
  version: 1.1.1
  description: |
    API for applying BDT policy
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: >
    3GPP TS 29.522 V17.7.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
security:
- {}
- oAuth2ClientCredentials: []
servers:
- url: '{apiRoot}/3gpp-applying-bdt-policy/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.

paths:
  /{afId}/subscriptions:
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
    get:
      summary: read all of the active subscriptions for the AF
      operationId: ReadAllSubscriptions
      tags:
        - Applied BDT Policy Subscription
      responses:
        '200':
          description: OK.

```

```

    content:
      application/json:
        schema:
          type: array
          items:
            $ref: '#/components/schemas/AppliedBdtPolicy'
          minItems: 0
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

post:
  summary: Creates a new subscription resource
  operationId: CreateNewSubscription
  tags:
    - Applied BDT Policy Subscription
  requestBody:
    description: Request to create a new subscription resource
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/AppliedBdtPolicy'
  responses:
    '201':
      description: Created (Successful creation of subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AppliedBdtPolicy'
      headers:
        Location:
          description: Contains the URI of the newly created resource.
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

/{afId}/subscriptions/{subscriptionId}:
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true
      schema:
        type: string
  get:
    summary: read an active subscriptions for the SCS/AS and the subscription Id
    operationId: ReadAnSubscription
    tags:
      - Individual Applied BDT Policy Subscription
    responses:
      '200':
        description: OK (Successful get the active subscription)
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/AppliedBdtPolicy'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29122_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  patch:
    summary: Partial updates/replaces an existing subscription resource
    operationId: PartialUpdateAnSubscription
    tags:
      - Individual Applied BDT Policy Subscription
    requestBody:
      required: true
      content:
        application/merge-patch+json:
          schema:
            $ref: '#/components/schemas/AppliedBdtPolicyPatch'
    responses:
      '200':
        description: OK. The subscription was modified successfully.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/AppliedBdtPolicy'
      '204':
        description: No content. The subscription was modified successfully.
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
delete:
  summary: Deletes an already existing subscription
  operationId: DeleteAnSubscription
  tags:
    - Individual Applied BDT Policy Subscription
  responses:
    '204':
      description: No Content (Successful deletion of the existing subscription)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    AppliedBdtPolicy:
      description: Represents an applied BDT policy.
      type: object
      properties:
        externalGroupId:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
        gpsi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
        bdtRefId:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/BdtReferenceId'
        suppFeat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        self:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      required:
        - bdtRefId
        - suppFeat
      oneOf:
        - required: [gpsi]
        - required: [externalGroupId]
    AppliedBdtPolicyPatch:
      description: >
        Represents the parameters to request the modification of a subscription to

```

```

    applied BDT policy.
  type: object
  properties:
    bdtRefId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/BdtReferenceId'
  required:
    - bdtRefId

```

A.7 IPTVConfiguration API

```

openapi: 3.0.0
info:
  title: 3gpp-iptvconfiguration
  version: 1.1.1
  description: |
    API for IPTV configuration.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
  externalDocs:
    description: >
      3GPP TS 29.522 V17.7.0; 5G System; Network Exposure Function Northbound APIs.
    url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
  security:
    - {}
    - oAuth2ClientCredentials: []
  servers:
    - url: '{apiRoot}/3gpp-iptvconfiguration/v1'
      variables:
        apiRoot:
          default: https://example.com
          description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
  paths:
    /{afId}/configurations:
      get:
        summary: read all of the active configurations for the AF
        operationId: ReadAllSubscriptions
        tags:
          - IPTV Configurations
        parameters:
          - name: afId
            in: path
            description: Identifier of the AF
            required: true
            schema:
              type: string
        responses:
          '200':
            description: OK (Successful get all of the active configurations for the AF)
            content:
              application/json:
                schema:
                  type: array
                  items:
                    $ref: '#/components/schemas/IptvConfigData'
                  minItems: 0
          '307':
            $ref: 'TS29122_CommonData.yaml#/components/responses/307'
          '308':
            $ref: 'TS29122_CommonData.yaml#/components/responses/308'
          '400':
            $ref: 'TS29122_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29122_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29122_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29122_CommonData.yaml#/components/responses/404'
          '406':
            $ref: 'TS29122_CommonData.yaml#/components/responses/406'
          '429':
            $ref: 'TS29122_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29122_CommonData.yaml#/components/responses/500'
          '503':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

post:
  summary: Creates a new configuration resource
  operationId: CreateNewSubscription
  tags:
    - IPTV Configurations
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
  requestBody:
    description: new configuration creation
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/IptvConfigData'
  responses:
    '201':
      description: Created (Successful creation of configuration)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/IptvConfigData'
      headers:
        Location:
          description: Contains the URI of the newly created resource.
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{afId}/configurations/{configurationId}:
get:
  summary: read an active configuration for the AF and the configuration Id
  operationId: ReadAnSubscription
  tags:
    - Individual IPTV Configuration
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: configurationId
      in: path
      description: Identifier of the configuration resource
      required: true
      schema:
        type: string

```

```

responses:
  '200':
    description: OK (Successful get the active configuration)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/IptvConfigData'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

put:
  summary: Fully updates/replaces an existing configuration resource
  operationId: FullyUpdateAnSubscription
  tags:
    - Individual IPTV Configuration
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: configurationId
      in: path
      description: Identifier of the configuration resource
      required: true
      schema:
        type: string
  requestBody:
    description: Parameters to update/replace the existing configuration
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/IptvConfigData'
  responses:
    '200':
      description: OK (Successful deletion of the existing configuration)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/IptvConfigData'
    '204':
      description: >
        Successful case. The resource has been successfully updated and no additional
        content is to be sent in the response message.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'

```



```
'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
```

patch:

- summary: Partial updates an existing configuration resource
- operationId: PartialUpdateAnSubscription
- tags:
 - Individual IPTV Configuration
- parameters:
 - name: afId
 - in: path
 - description: Identifier of the AF
 - required: true
 - schema:
 - type: string
 - name: configurationId
 - in: path
 - description: Identifier of the configuration resource
 - required: true
 - schema:
 - type: string
- requestBody:
 - required: true
 - content:
 - application/merge-patch+json:
 - schema:
 - \$ref: '#/components/schemas/IptvConfigDataPatch'
- responses:
 - '200':
 - description: OK. The configuration was modified successfully.
 - content:
 - application/json:
 - schema:
 - \$ref: '#/components/schemas/IptvConfigData'
 - '204':
 - description: >
Successful case. The resource has been successfully updated and no additional content is to be sent in the response message.
 - '307':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/307'
 - '308':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/308'
 - '400':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/400'
 - '401':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/401'
 - '403':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/403'
 - '404':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/404'
 - '411':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/411'
 - '413':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/413'
 - '415':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/415'
 - '429':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/429'
 - '500':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/500'
 - '503':
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/503'
 - default:
 - \$ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:

```

summary: Deletes an already existing configuration
operationId: DeleteAnSubscription
tags:
  - Individual IPTV Configuration
parameters:
  - name: afId
    in: path
    description: Identifier of the AF
    required: true
    schema:
      type: string
  - name: configurationId
    in: path
    description: Identifier of the configuration resource
    required: true
    schema:
      type: string
responses:
  '204':
    description: No Content (Successful deletion of the existing configuration)
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
schemas:
  IptvConfigData:
    description: Represents an individual IPTV Configuration resource.
    type: object
    properties:
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      gpsi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      exterGroupId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
      afAppId:
        type: string
      dnn:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
      snssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      multiAccCtrls:
        type: object
        additionalProperties:
          $ref: '#/components/schemas/MulticastAccessControl'
        minProperties: 1
        description: >
          Identifies a list of multicast address access control information.
          Any string value can be used as a key of the map.
      mtcProviderId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MtcProviderInformation'
      suppFeat:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    required:

```

```

- afAppId
- multiAccCtrls
- suppFeat
IptvConfigDataPatch:
  description: >
    Represents the parameters to request the modification of an IPTV Configuration resource.
  type: object
  properties:
    multiAccCtrls:
      type: object
      additionalProperties:
        $ref: '#/components/schemas/MulticastAccessControl'
      minProperties: 1
      description: >
        Identifies a list of multicast address access control information.
        Any string value can be used as a key of the map.
MulticastAccessControl:
  description: Represents multicast address access control information.
  type: object
  properties:
    srcIpv4Addr:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
    srcIpv6Addr:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Addr'
    multicastV4Addr:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
    multicastV6Addr:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Addr'
    accStatus:
      $ref: '#/components/schemas/AccessRightStatus'
  required:
    - accStatus
AccessRightStatus:
  anyOf:
    - type: string
      enum:
        - FULLY_ALLOWED
        - PREVIEW_ALLOWED
        - NO_ALLOWED
    - type: string
      description: >
        This string provides forward-compatibility with future extensions to the enumeration but
        is not used to encode content defined in the present version of this API.
  description: |
    Possible values are:
    - FULLY_ALLOWED: The User is fully allowed to access to the channel.
    - PREVIEW_ALLOWED: The User is preview allowed to access to the channel.
    - NO_ALLOWED: The User is not allowed to access to the channel.

```

A.8 LpiParameterProvision API

```

openapi: 3.0.0
info:
  title: 3gpp-lpi-pp
  version: 1.1.2
  description: |
    API for Location Privacy Indication Parameters Provisioning.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: >
    3GPP TS 29.522 V17.8.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
security:
- {}
- oAuth2ClientCredentials: []
servers:
- url: '{apiRoot}/3gpp-lpi-pp/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /{afId}/provisionedLpis:
    get:

```

```

summary: read all of the active LPI Parameters Provisioning resources for the AF
operationId: ReadAllResources
tags:
  - LPI Parameters Provisionings
parameters:
  - name: afId
    in: path
    description: Identifier of the AF
    required: true
    schema:
      type: string
responses:
  '200':
    description: OK (Successful get all of the active resources for the AF)
    content:
      application/json:
        schema:
          type: array
          items:
            $ref: '#/components/schemas/LpiParametersProvision'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

post:
summary: Creates a new LPI Parameters Provisioning resource
operationId: CreateNewResource
tags:
  - LPI Parameters Provisionings
parameters:
  - name: afId
    in: path
    description: Identifier of the AF
    required: true
    schema:
      type: string
requestBody:
  description: new resource creation
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/LpiParametersProvision'
responses:
  '201':
    description: Created (Successful creation)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/LpiParametersProvision'
    headers:
      Location:
        description: Contains the URI of the newly created resource.
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{afId}/provisionedLpis/{provisionedLpiId}:
  get:
    summary: read an active LPI Parameters Provisioning resource for the AF and the provisioned
LPI Id
    operationId: ReadAnResource
    tags:
      - Individual LPI Parameters Provisioning
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
      - name: provisionedLpiId
        in: path
        description: Identifier of the provisioned LPI parameter resource
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK (Successful get the active resource)
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/LpiParametersProvision'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29122_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

  put:
    summary: Fully updates/replaces an existing LPI Parameters Provisioning resource
    operationId: FullyUpdateAnResource
    tags:
      - Individual LPI Parameters Provisioning
    parameters:
      - name: afId
        in: path

```

```

    description: Identifier of the AF
    required: true
    schema:
      type: string
  - name: provisionedLpiId
    in: path
    description: Identifier of the provisioned LPI parameter resource
    required: true
    schema:
      type: string
requestBody:
  description: Parameters to update/replace the existing resource
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/LpiParametersProvision'
responses:
  '200':
    description: >
      OK. The resource has been successfully updated and a representation of the updated
      resource is returned.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/LpiParametersProvision'
  '204':
    description: >
      Successful case. The resource has been successfully updated and no additional
      content is sent in the response message.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
patch:
  summary: Partially modifies an existing LPI Parameters Provisioning resource.
  operationId: PartialUpdateAnResource
  tags:
    - Individual LPI Parameters Provisioning
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: provisionedLpiId
      in: path
      description: Identifier of the provisioned LPI parameter resource
      required: true
      schema:
        type: string
  requestBody:
    description: Parameters to modify the existing resource.
    required: true

```

```

content:
  application/json:
    schema:
      $ref: '#/components/schemas/LpiParametersProvisionPatch'
responses:
  '200':
    description: >
      OK. The resource has been successfully modified and a representation of the
      updated resource is returned.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/LpiParametersProvision'
  '204':
    description: >
      Successful case. The resource has been successfully modified and no additional content
      is sent in the response message.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes an already existing LPI Parameters Provisioning resource
  operationId: DeleteAnResource
  tags:
    - Individual LPI Parameters Provisioning
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: provisionedLpiId
      in: path
      description: Identifier of the provisioned LPI parameter resource
      required: true
      schema:
        type: string
  responses:
    '204':
      description: No Content (Successful deletion of the existing resource)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    LpiParametersProvision:
      description: Represents an individual LPI Parameters Provisionings resource.
      type: object
      properties:
        self:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
        exterGroupId:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
        gpsi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
        lpi:
          $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/Lpi'
        mtcProviderId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MtcProviderInformation'
        suppFeat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      required:
        - lpi
        - suppFeat
    LpiParametersProvisionPatch:
      description: Represents the parameters to modify an existing Individual LPI Parameters Provisionings resource.
      type: object
      properties:
        lpi:
          $ref: 'TS29503_Nudm_SDM.yaml#/components/schemas/Lpi'
        mtcProviderId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MtcProviderInformation'

```

A.9 ServiceParameter API

```

openapi: 3.0.0
info:
  title: 3gpp-service-parameter
  version: 1.1.3
  description: |
    API for AF service paramter
    © 2023, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
  externalDocs:
    description: >
      3GPP TS 29.522 V17.9.0; 5G System; Network Exposure Function Northbound APIs.
    url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
  security:
    - {}
    - oAuth2ClientCredentials: []
  servers:
    - url: '{apiRoot}/3gpp-service-parameter/v1'
      variables:
        apiRoot:
          default: https://example.com
          description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /{afId}/subscriptions:
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF

```



```

    required: true
    schema:
      type: string
  get:
    summary: read all of the active subscriptions for the AF
    operationId: ReadAllSubscriptions
    tags:
      - Service Parameter Subscriptions
    parameters:
      - name: gpsis
        in: query
        description: The GPSI of the requested UE(s).
        required: false
        schema:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
          minItems: 1
      - name: ip-addr
        in: query
        description: The IP address(es) of the requested UE(s).
        required: false
        schema:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
          minItems: 1
      - name: ip-domain
        in: query
        description: >
          The IPv4 address domain identifier. The attribute may only be provided
          if IPv4 address is included in the ip-addr query parameter.
        required: false
        schema:
          type: string
      - name: mac-addr
        in: query
        description: The MAC address(es) of the requested UE(s).
        required: false
        schema:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
          minItems: 1
    responses:
      '200':
        description: OK.
        content:
          application/json:
            schema:
              type: array
              items:
                $ref: '#/components/schemas/ServiceParameterData'
              minItems: 0
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29122_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  post:

```

```

summary: Creates a new subscription resource
operationId: CreateAnSubscription
tags:
  - Service Parameter Subscriptions
requestBody:
  description: Request to create a new subscription resource
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/ServiceParameterData'
responses:
  '201':
    description: Created (Successful creation of subscription)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/ServiceParameterData'
    headers:
      Location:
        description: Contains the URI of the newly created resource.
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
callbacks:
  notificationDestination:
    '{$request.body#/notificationDestination}':
      post:
        requestBody:
          description: >
            Notifications upon AF Service Parameter Authorization Update,
            and/or AF subscribed event notification of the outcome related
            to the invocation of service parameters provisioning.
          required: true
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/AfNotification'
                minItems: 1
        responses:
          '204':
            description: Expected response to a successful callback processing without a body
          '307':
            $ref: 'TS29122_CommonData.yaml#/components/responses/307'
          '308':
            $ref: 'TS29122_CommonData.yaml#/components/responses/308'
          '400':
            $ref: 'TS29122_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29122_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29122_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29122_CommonData.yaml#/components/responses/404'

```

```

    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  /{afId}/subscriptions/{subscriptionId}:
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
      - name: subscriptionId
        in: path
        description: Identifier of the subscription resource
        required: true
        schema:
          type: string
    get:
      summary: read an active subscriptions for the SCS/AS and the subscription Id
      operationId: ReadAnSubscription
      tags:
        - Individual Service Parameter Subscription
      responses:
        '200':
          description: OK (Successful get the active subscription)
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/ServiceParameterData'
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'
    put:
      summary: Fully updates/replaces an existing subscription resource
      operationId: FullyUpdateAnSubscription
      tags:
        - Individual Service Parameter Subscription
      requestBody:
        description: Parameters to update/replace the existing subscription
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/ServiceParameterData'
      responses:
        '200':

```

```
description: OK (Successful update of the subscription)
content:
  application/json:
    schema:
      $ref: '#/components/schemas/ServiceParameterData'
'204':
  description: OK (Successful update of the subscription)
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
```

patch:

```
summary: Partial updates/replaces an existing subscription resource
operationId: PartialUpdateAnSubscription
tags:
  - Individual Service Parameter Subscription
requestBody:
  required: true
  content:
    application/merge-patch+json:
      schema:
        $ref: '#/components/schemas/ServiceParameterDataPatch'
responses:
  '200':
    description: OK. The subscription was modified successfully.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/ServiceParameterData'
  '204':
    description: OK. The subscription was modified successfully.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
```

```

    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes an already existing subscription
  operationId: DeleteAnSubscription
  tags:
    - Individual Service Parameter Subscription
  responses:
    '204':
      description: No Content (Successful deletion of the existing subscription)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    ServiceParameterData:
      description: Represents an individual Service Parameter subscription resource.
      type: object
      properties:
        afServiceId:
          type: string
          description: Identifies a service on behalf of which the AF is issuing the request.
        appId:
          type: string
          description: Identifies an application.
        dnn:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
        snssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        externalGroupId:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
        anyUeInd:
          type: boolean
          description: >
            Identifies whether the AF request applies to any UE. This attribute
            shall set to "true" if applicable for any UE, otherwise, set to "false".
        gpsi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
        ueIpv4:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
        ueIpv6:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Addr'
        ueMac:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
        self:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
        subNotifEvents:
          type: array
          items:
            $ref: '#/components/schemas/Event'
          minItems: 1
        notificationDestination:

```

```

    $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
  requestTestNotification:
    type: boolean
    description: >
      Set to true by the AF to request the NEF to send a test notification
      as defined in clause 5.2.5.3 of 3GPP TS 29.122. Set to false or omitted otherwise.
  websocketNotifConfig:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
  paramOverPc5:
    $ref: '#/components/schemas/ParameterOverPc5'
  paramOverUu:
    $ref: '#/components/schemas/ParameterOverUu'
  paramForProSeDd:
    $ref: '#/components/schemas/ParamForProSeDd'
  paramForProSeDc:
    $ref: '#/components/schemas/ParamForProSeDc'
  paramForProSeU2NRelUe:
    $ref: '#/components/schemas/ParamForProSeU2NRelUe'
  paramForProSeRemUe:
    $ref: '#/components/schemas/ParamForProSeRemUe'
  urspGuidance:
    type: array
    items:
      $ref: '#/components/schemas/UrspRuleRequest'
    minItems: 1
    description: Contains the service parameter used to guide the URSP.
  mtcProviderId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/MtcProviderInformation'
  suppFeat:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
ServiceParameterDataPatch:
  description: >
    Represents the parameters to request the modification of a service parameter
    subscription resource.
  type: object
  properties:
    paramOverPc5:
      $ref: '#/components/schemas/ParameterOverPc5Rm'
    paramOverUu:
      $ref: '#/components/schemas/ParameterOverUuRm'
    paramForProSeDd:
      $ref: '#/components/schemas/ParamForProSeDdRm'
    paramForProSeDc:
      $ref: '#/components/schemas/ParamForProSeDcRm'
    paramForProSeU2NRelUe:
      $ref: '#/components/schemas/ParamForProSeU2NRelUeRm'
    paramForProSeRemUe:
      $ref: '#/components/schemas/ParamForProSeRemUeRm'
  urspGuidance:
    type: array
    items:
      $ref: '#/components/schemas/UrspRuleRequest'
    minItems: 1
    description: Contains the service parameter used to guide the URSP.
  subNotifEvents:
    type: array
    items:
      $ref: '#/components/schemas/Event'
    minItems: 1
    nullable: true
  notificationDestination:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
ParameterOverPc5:
  description: >
    Represents configuration parameters for V2X communications over PC5 reference point.
  type: string
ParameterOverPc5Rm:
  description: >
    Represents the same as the ParameterOverPc5 data type but with the nullable:true property.
  type: string
  nullable: true
ParameterOverUu:
  description: >
    Represents configuration parameters for V2X communications over Uu reference point.
  type: string
ParameterOverUuRm:
  description: >
    Represents the same as the ParameterOverUu data type but with the nullable:true property.

```

```
type: string
nullable: true
ParamForProSeDd:
  description: Represents the service parameters for 5G ProSe direct discovery.
  type: string
ParamForProSeDdRm:
  description: >
    This data type is defined in the same way as the ParamForProSeDd data type,
    but with the OpenAPI nullable property set to true.
  type: string
  nullable: true
ParamForProSeDc:
  description: Represents the service parameters for 5G ProSe direct communications.
  type: string
ParamForProSeDcRm:
  description: >
    This data type is defined in the same way as the ParamForProSeDc data type,
    but with the OpenAPI nullable property set to true.
  type: string
  nullable: true
ParamForProSeU2NRelUe:
  description: Represents the service parameters for 5G ProSe UE-to-network relay UE.
  type: string
ParamForProSeU2NRelUeRm:
  description: >
    This data type is defined in the same way as the ParamForProSeU2NRelay data type,
    but with the OpenAPI nullable property set to true.
  type: string
  nullable: true
ParamForProSeRemUe:
  description: Represents the service parameters for 5G ProSe Remate UE.
  type: string
ParamForProSeRemUeRm:
  description: >
    This data type is defined in the same way as the ParamForProSeRemUe data type,
    but with the OpenAPI nullable property set to true.
  type: string
  nullable: true
UrspRuleRequest:
  description: Contains parameters that can be used to guide the URSP.
  type: object
  properties:
    trafficDesc:
      $ref: '#/components/schemas/TrafficDescriptorComponents'
    relatPrecedence:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
    routeSelParamSets:
      type: array
      items:
        $ref: '#/components/schemas/RouteSelectionParameterSet'
      minItems: 1
    description: >
      Sets of parameters that may be used to guide the Route Selection Descriptors of the
      URSP.
RouteSelectionParameterSet:
  description: >
    Contains parameters that can be used to guide the Route Selection
    Descriptors of the URSP.
  type: object
  properties:
    dnn:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
    snssai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
    precedence:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'
    spatialValidityAreas:
      type: array
      items:
        $ref: 'TS29522_AMPolicyAuthorization.yaml#/components/schemas/GeographicalArea'
      minItems: 1
    description: >
      Indicates where the route selection parameters apply. It may correspond
      to a geographical area, for example using a geographic shape that
      is known to the AF and is configured by the operator to correspond to a list
      of or TAIs.
    spatialValidityTais:
      type: array
```

```

    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Tai'
    minItems: 1
    description: >
      Indicates the TAIs in which the route selection parameters apply. This attribute is
      applicable only within the 5GC and it shall not be included in the request messages of
      untrusted AFs for URSP guidance.
Event:
  anyOf:
    - type: string
      enum:
        - SUCCESS_UE_POL_DEL_SP
        - UNSUCCESS_UE_POL_DEL_SP
    - type: string
      description: >
        This string identifies AF subscribe to event(s) notifications related to
        AF provisioned service parameters.
  description: |
    Possible values are:
    - SUCCESS_UE_POL_DEL_SP: Successful UE Policy Delivery related to
      the invocation of AF provisioned Service Parameters.
    - UNSUCCESS_UE_POL_DEL_SP: Unsuccessful UE Policy Delivery related to the invocation of AF
      provisioned Service Parameters.
AfNotification:
  description: >
    Notifications upon AF Service Parameter Authorization Update e.g. to
    revoke the authorization, and/or AF subscribed event notification of the
    outcome related to the invocation of service parameter provisioning.
  type: object
  properties:
    subscription:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
    reportEvent:
      $ref: '#/components/schemas/Event'
    authResult:
      $ref: '#/components/schemas/AuthorizationResult'
    gpsis:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      minItems: 1
    dnn:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
    snssai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
    eventInfo:
      $ref: '#/components/schemas/EventInfo'
  required:
    - subscription
  anyOf:
    - required: [reportEvent]
    - required: [authResult]
TrafficDescriptorComponents:
  description: Traffic descriptor components for the requested URSP.
  type: object
  properties:
    appDescs:
      type: object
      additionalProperties:
        $ref: 'TS29522_5GLANParameterProvision.yaml#/components/schemas/AppDescriptor'
      minProperties: 1
      description: Describes the operation systems and the corresponding applications for each
        operation systems. The key of map is osId.
    flowDescs:
      type: array
      items:
        type: string
      minItems: 1
      description: Represents a 3-tuple with protocol, server ip and server port for UL/DL
        application traffic. The content of the string has the same encoding as the IPfilterRule
        AVP value as defined in IETF RFC 6733.
    domainDescs:
      type: array
      items:
        type: string
      minItems: 1
      description: FQDN(s) or a regular expression which are used as a domain name matching
        criteria.

```



```
ethFlowDescs:
  type: array
  items:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/EthFlowDescription'
  minItems: 1
  description: Descriptor(s) for destination information of non-IP traffic in which only
    ethernet flow description is defined.
dnns:
  type: array
  items:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
  minItems: 1
  description: This is matched against the DNN information provided by the application.
connCaps:
  type: array
  items:
    $ref: '#/components/schemas/ConnectionCapabilities'
  minItems: 1
  description: This is matched against the information provided by a UE application when it
    requests a network connection with certain capabilities.
anyOF:
  - required: [appDescs]
  - required: [flowDescs]
  - required: [domainDescs]
  - required: [ethFlowDescs]
  - required: [dnns]
  - required: [connCaps]
AuthorizationResult:
  anyOF:
  - type: string
  enum:
    - AUTH_REVOKED
  - type: string
  description: >
    This string indicates NEF notify the AF about the service parameters authorization
    updates result.
  description: |
    Possible values are:
    - AUTH_REVOKED: Indicated the service parameters authorization is revoked.
EventInfo:
  description: Indicates the event information.
  type: object
  properties:
    failureCause:
      $ref: '#/components/schemas/Failure'
Failure:
  oneOf:
  - type: string
  enum:
    - UNSPECIFIED
    - UE_NOT_REACHABLE
    - UNKNOWN
    - UE_TEMP_UNREACHABLE
  - type: string
  description: >
    This string represents the failure reason for the unsuccessful result. May be
    present if the reported reportEvent attribute is "UNSUCCESS_UE_POL_DEL_SP".
  description: |
    Possible values are:
    - UNSPECIFIED: Indicates the PCF received the UE sent UE policy delivery service cause #111
      (Protocol error, unspecified).
    - UE_NOT_REACHABLE: Indicates the PCF received the notification from the AMF that the UE is
      not reachable.
    - UNKNOWN: Indicates unknown reasons upon no response from the UE, e.g. UPDS message type is
      not defined or not implemented by the UE, or not compatible with the UPDS state, in which
      the UE shall ignore the UPDS message.
    - UE_TEMP_UNREACHABLE: Indicates the PCF received the notification from the AMF that the UE
      is not reachable but the PCF will retry again.
ConnectionCapabilities:
  anyOF:
  - type: string
  enum:
    - IMS
    - MMS
    - SUPL
    - INTERNET
  - type: string
  description: >
```

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

description: >

Possible values are

- IMS: Indicates the connection capability to support IMS service.
- MMS: Indicates the connection capability to support MMS service.
- SUPL: Indicates the connection capability to support SUPL service.
- INTERNET: Indicates the connection capability to support Internet service.

A.10 ACSParameterProvision API

openapi: 3.0.0

info:

title: 3gpp-acs-pp

version: 1.1.2

description: |

API for 5G ACS Parameter Provision.

© 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).

All rights reserved.

externalDocs:

description: >

3GPP TS 29.522 V17.8.0; 5G System; Network Exposure Function Northbound APIs.

url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'

security:

- {}

- oAuth2ClientCredentials: []

servers:

- url: '{apiRoot}/3gpp-acs-pp/v1'

variables:

apiRoot:

default: https://example.com

description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.

paths:

/{afId}/subscriptions:

get:

summary: read all of the active subscriptions for the AF

operationId: ReadAllSubscriptions

tags:

- ACS Configuration Subscriptions

parameters:

- name: afId

in: path

description: Identifier of the AF

required: true

schema:

type: string

responses:

'200':

description: OK (Successful get all of the active subscriptions for the AF)

content:

application/json:

schema:

type: array

items:

\$ref: '#/components/schemas/AcsConfigurationData'

minItems: 0

'307':

\$ref: 'TS29122_CommonData.yaml#/components/responses/307'

'308':

\$ref: 'TS29122_CommonData.yaml#/components/responses/308'

'400':

\$ref: 'TS29122_CommonData.yaml#/components/responses/400'

'401':

\$ref: 'TS29122_CommonData.yaml#/components/responses/401'

'403':

\$ref: 'TS29122_CommonData.yaml#/components/responses/403'

'404':

\$ref: 'TS29122_CommonData.yaml#/components/responses/404'

'406':

\$ref: 'TS29122_CommonData.yaml#/components/responses/406'

'429':

\$ref: 'TS29122_CommonData.yaml#/components/responses/429'

'500':

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

post:
  summary: Creates a new subscription resource
  operationId: CreateAnSubscription
  tags:
    - ACS Configuration Subscriptions
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
  requestBody:
    description: new subscription creation
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/AcsConfigurationData'
  responses:
    '201':
      description: Created (Successful creation)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AcsConfigurationData'
      headers:
        Location:
          description: Contains the URI of the newly created resource.
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{afId}/subscriptions/{subscriptionId}:
get:
  summary: read an active subscription for the AF and the subscription Id
  operationId: ReadAnSubscription
  tags:
    - Individual ACS Configuration Subscription
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true

```

```

    schema:
      type: string
  responses:
    '200':
      description: OK (Successful get the active subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AcsConfigurationData'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Fully updates/replaces an existing subscription resource
  operationId: FullyUpdateAnSubscription
  tags:
    - Individual ACS Configuration Subscription
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true
      schema:
        type: string
  requestBody:
    description: Parameters to update/replace the existing subscription
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/AcsConfigurationData'
  responses:
    '200':
      description: OK (Successful update of the existing subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AcsConfigurationData'
    '204':
      description: >
        Successful case. The resource has been successfully updated and no additional
        content is to be sent in the response message.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'

```

```

'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

patch:
  summary: Partial modifies an existing subscription resource.
  operationId: PartialUpdateAnSubscription
  tags:
    - Individual ACS Configuration Subscription
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true
      schema:
        type: string
  requestBody:
    description: Parameters to modify the existing subscription.
    required: true
    content:
      application/merge-patch+json:
        schema:
          $ref: '#/components/schemas/AcsConfigurationDataPatch'
  responses:
    '200':
      description: >
        OK. The subscription resource was successfully modified and a representation of the
        updated resource is returned.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AcsConfigurationData'
    '204':
      description: >
        No Content. The resource has been successfully modified and no additional content is to
        be sent in the response message.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes an already existing subscription
  operationId: DeleteAnSubscription
  tags:
    - Individual ACS Configuration Subscription
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true
      schema:
        type: string
  responses:
    '204':
      description: No Content (Successful deletion of the existing subscription)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

schemas:
  AcsConfigurationData:
    description: Represents an individual ACS Configuration subscription resource.
    type: object
    properties:
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      exterGroupId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
      gpsi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      acsInfo:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/AcsInfo'
      mtcProviderId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MtcProviderInformation'
      suppFeat:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    required:
      - acsInfo
      - suppFeat
  AcsConfigurationDataPatch:
    description: >
      Represents the parameters to request to modify an existing Individual ACS Configuration
      subscription resource.
    type: object

```

```

properties:
  acsInfo:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/AcsInfo'
  mtcProviderId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/MtcProviderInformation'

```

A.11 MoLcsNotify API

```

openapi: 3.0.0
info:
  title: 3gpp-mo-lcs-notify
  version: 1.1.1
  description: |
    API for UE updated location information notification.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: >
    3GPP TS 29.522 V17.7.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
security:
  - {}
  - oAuth2ClientCredentials: []
servers:
  - url: '{apiRoot}/3gpp-mo-lcs-notify/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /:
    post:
      summary: UE location information update notification
      operationId: UELocationNotify
      tags:
        - AF level UE location update notification operation
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/LocUpdateData'
            required: true
      responses:
        '200':
          description: Success
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/LocUpdateDataReply'
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29122_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29122_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29122_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    LocUpdateData:
      description: Represents a UE updated location information.
      type: object
      properties:
        gpsi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
        locInfo:
          $ref: 'TS29122_MonitoringEvent.yaml#/components/schemas/LocationInfo'
        lcsQosClass:
          $ref: 'TS29572_Nlmc_Location.yaml#/components/schemas/LcsQosClass'
        svcId:
          $ref: 'TS29515_Ngmlc_Location.yaml#/components/schemas/ServiceIdentity'
        suppFeat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      required:
        - gpsi
        - lcsQosClass
        - locInfo
        - suppFeat
    LocUpdateDataReply:
      description: Represents a reply to a MO LCS notification.
      type: object
      properties:
        suppFeat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      required:
        - suppFeat

```

A.12 AKMA API

```

openapi: 3.0.0
info:
  title: 3gpp-akma
  version: 1.0.1
  description: |
    API for AKMA.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
  externalDocs:
    description: >
      3GPP TS 29.522 V17.7.0; 5G System; Network Exposure Function Northbound APIs.
    url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
  security:
    - {}
    - oAuth2ClientCredentials: []
  servers:
    - url: '{apiRoot}/3gpp-akma/v1'
      variables:
        apiRoot:
          default: https://example.com
          description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
  paths:
    /retrieve:
      post:
        summary: Retrieve AKMA Application Key Information.
        operationId: RetrieveAKMAAppKey
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AkmaAfKeyRequest'
        responses:
          '200':
            description: The requested information was returned successfully.
            content:

```



```

    application/json:
      schema:
        $ref: '#/components/schemas/AkmaAfKeyData'
  '204':
    description: No Content.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

components:

securitySchemes:

```

  oAuth2ClientCredentials:
    type: oauth2
    flows:
      clientCredentials:
        tokenUrl: '{tokenUrl}'
        scopes: {}

```

schemas:

```

  AkmaAfKeyRequest:
    description: >
      Represents the parameters to request the retrieval of AKMA Application Key information.
    type: object
    properties:
      suppFeat:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      afId:
        $ref: '#/components/schemas/AfId'
      aKeyId:
        $ref: '#/components/schemas/AKeyId'
      anonInd:
        type: boolean
        description: >
          Indicates whether an anonymous user access. Set to "true" if an anonymous user access is
          requested; otherwise set to "false". Default value is "false" if omitted.
        default: false
      required:
        - afId
        - aKeyId
  AkmaAfKeyData:
    description: Represents AKMA Application Key information data.
    type: object
    properties:
      suppFeat:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
      gpsi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      expiry:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
      kaf:
        type: string
      supi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
    required:
      - kaf
      - expiry

```

```

AfId:
  description: Represents an AF identifier.
  type: string
AKId:
  description: Represents an AKMA Key Identifier.
  type: string

```

A.13 TimeSyncExposure API

```

openapi: 3.0.0
info:
  title: 3gpp-time-sync-exposure
  version: 1.0.1
  description: |
    API for time synchronization exposure.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: >
    3GPP TS 29.522 V17.7.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
security:
  - {}
  - oAuth2ClientCredentials: []
servers:
  - url: '{apiRoot}/3gpp-time-sync/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /{afId}/subscriptions:
    get:
      summary: read all of the active subscriptions for the AF
      operationId: ReadAllSubscriptions
      tags:
        - Time Synchronization Exposure Subscriptions
      parameters:
        - name: afId
          in: path
          description: Identifier of the AF
          required: true
          schema:
            type: string
      responses:
        '200':
          description: OK (Successful get all of the active subscriptions for the AF)
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/TimeSyncExposureSubsc'
                minItems: 0
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

post:
  summary: Creates a new subscription resource
  operationId: CreateNewSubscription
  tags:
    - Time Synchronization Exposure Subscriptions
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
  requestBody:
    description: new subscription creation
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/TimeSyncExposureSubsc'
  responses:
    '201':
      description: Created (Successful creation)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/TimeSyncExposureSubsc'
      headers:
        Location:
          description: 'Contains the URI of the newly created resource'
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  callbacks:
    timeSyncSubsNotification:
      '{$request.body#/subsNotifUri}':
        post:
          requestBody:
            description: Notification for Time Synchronization Capability for a list of UEs.
            required: true
            content:
              application/json:
                schema:
                  $ref: '#/components/schemas/TimeSyncExposureSubsNotif'
          responses:
            '204':
              description: Expected response to a successful callback processing without a body
            '307':
              $ref: 'TS29122_CommonData.yaml#/components/responses/307'
            '308':
              $ref: 'TS29122_CommonData.yaml#/components/responses/308'
            '400':
              $ref: 'TS29122_CommonData.yaml#/components/responses/400'
            '401':
              $ref: 'TS29122_CommonData.yaml#/components/responses/401'
            '403':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{afId}/subscriptions/{subscriptionId}:
  get:
    summary: read an active subscription for the AF and the subscription Id
    operationId: ReadAnSubscription
    tags:
      - Individual Time Synchronization Exposure Subscription
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
      - name: subscriptionId
        in: path
        description: Identifier of the subscription resource
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK (Successful get the active subscription)
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/TimeSyncExposureSubsc'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29122_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

  put:
    summary: Fully updates/replaces an existing subscription resource
    operationId: FullyUpdateAnSubscription
    tags:
      - Individual Time Synchronization Exposure Subscription
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:

```

```

    type: string
  - name: subscriptionId
    in: path
    description: Identifier of the subscription resource
    required: true
    schema:
      type: string
requestBody:
  description: Parameters to update/replace the existing subscription
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/TimeSyncExposureSubsc'
responses:
  '200':
    description: OK (Successful deletion of the existing subscription)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/TimeSyncExposureSubsc'
  '204':
    description: >
      Successful case. The resource has been successfully updated and no additional
      content is to be sent in the response message.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes an already existing subscription
  operationId: DeleteAnSubscription
  tags:
    - Individual Time Synchronization Exposure Subscription
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true
      schema:
        type: string
  responses:
    '204':
      description: No Content (Successful deletion of the existing subscription)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{afId}/subscriptions/{subscriptionId}/configurations:
  get:
    summary: read all of the active configurations for the AF
    operationId: ReadAllConfigurations
    tags:
      - Time Synchronization Exposure Configurations
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
      - name: subscriptionId
        description: String identifying the individual synchronization Exposure Subscription
        resource in the NEF
        in: path
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK (Successful get all of the active configurations for the AF)
        content:
          application/json:
            schema:
              type: array
              items:
                $ref: '#/components/schemas/TimeSyncExposureConfig'
              minItems: 0
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29122_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

  post:
    summary: Creates a new configuration resource
    operationId: CreateNewConfiguration
    tags:
      - Time Synchronization Exposure Configurations
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF

```

```

    required: true
    schema:
      type: string
  - name: subscriptionId
    description: >
      String identifying the individual synchronization Exposure Subscription
      resource in the NEF.
    in: path
    required: true
    schema:
      type: string
requestBody:
  description: new configuration creation
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/TimeSyncExposureConfig'
responses:
  '201':
    description: Created (Successful creation)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/TimeSyncExposureConfig'
    headers:
      Location:
        description: 'Contains the URI of the newly created resource'
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
callbacks:
  timeSyncConfigNotification:
    '{$request.body#/configNotifUri}':
      post:
        requestBody:
          description: Notification for Time Synchronization Service status.
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/TimeSyncExposureConfigNotif'
        responses:
          '204':
            description: Expected response to a successful callback processing without a body
          '307':
            $ref: 'TS29122_CommonData.yaml#/components/responses/307'
          '308':
            $ref: 'TS29122_CommonData.yaml#/components/responses/308'
          '400':
            $ref: 'TS29122_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29122_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29122_CommonData.yaml#/components/responses/403'
          '404':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{afId}/subscriptions/{subscriptionId}/configurations/{instanceReference}:
get:
  summary: read an active subscription for the AF and the subscription Id
  operationId: ReadTimeSynSubscription
  tags:
    - Individual Time Synchronization Exposure Subscription
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true
      schema:
        type: string
    - name: instanceReference
      in: path
      description: Identifier of the configuration resource
      required: true
      schema:
        type: string
  responses:
    '200':
      description: OK (Successful get the active subscription)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/TimeSyncExposureConfig'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Fully updates/replaces an existing configuration resource
  operationId: FullyUpdateAnConfiguration
  tags:
    - Individual Time Synchronization Exposure Configuration
  parameters:
    - name: afId

```



```

    in: path
    description: Identifier of the AF
    required: true
    schema:
      type: string
  - name: subscriptionId
    in: path
    description: Identifier of the subscription resource
    required: true
    schema:
      type: string
  - name: instanceReference
    in: path
    description: Identifier of the configuration resource
    required: true
    schema:
      type: string
requestBody:
  description: Parameters to update/replace the existing configuration
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/TimeSyncExposureConfig'
responses:
  '200':
    description: OK (Successful deletion of the existing configuration)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/TimeSyncExposureConfig'
  '204':
    description: >
      Successful case. The resource has been successfully updated and no additional
      content is to be sent in the response message.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes an already existing configuration
  operationId: DeleteAnConfiguration
  tags:
    - Individual Time Synchronization Exposure Configuration
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: subscriptionId
      in: path
      description: Identifier of the subscription resource
      required: true

```

```

    schema:
      type: string
  - name: instanceReference
    in: path
    description: Identifier of the configuration resource
    required: true
    schema:
      type: string
responses:
  '204':
    description: No Content (Successful deletion of the existing configuration)
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    TimeSyncExposureSubsc:
      description: >
        Contains requested parameters for the subscription to the notification
        of time synchronization capability.
      type: object
      properties:
        exterGroupId:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
        gpsis:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
          minItems: 1
          description: >
            Contains a list of UE for which the time synchronization capabilities is requested.
        anyUeInd:
          type: boolean
          description: >
            Any UE indication. This IE shall be present if the event subscription
            is applicable to any UE. Default value "false" is used, if not present.
        afServiceId:
          type: string
          description: Identifies a service on behalf of which the AF is issuing the request.
        dnn:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
        snssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        subsNotifId:
          type: string
          description: Notification Correlation ID assigned by the NF service consumer.
        subsNotifUri:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        subscribedEvents:
          type: array
          items:
            $ref: '#/components/schemas/SubscribedEvent'

```

```

    minItems: 1
    description: Subscribed events
  eventFilters:
    type: array
    items:
      $ref: '#/components/schemas/EventFilter'
    minItems: 1
    description: >
      Contains the filter conditions to match for notifying the event(s)
      of time synchronization capabilities for a list of UE(s).
  notifMethod:
    $ref: 'TS29508_Nsmf_EventExposure.yaml#/components/schemas/NotificationMethod'
  maxReportNbr:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
  expiry:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
  repPeriod:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
  requestTestNotification:
    type: boolean
    description: >
      Set to true by the SCS/AS to request the SCEF to send a test notification
      as defined in clause 5.2.5.3 of 3GPP TS 29.122. Set to false or omitted otherwise.
  websocketNotifConfig:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
  suppFeat:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  required:
    - subsNotifUri
    - subsNotifId
TimeSyncCapability:
  description: Contains time synchronization capability.
  type: object
  properties:
    upNodeId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uint64'
    gmCapables:
      type: array
      items:
        $ref: '#/components/schemas/GmCapable'
    asTimeRes:
      $ref: '#/components/schemas/AsTimeResource'
    ptpCapForUes:
      type: object
      additionalProperties:
        $ref: '#/components/schemas/PtpCapabilitiesPerUe'
      minProperties: 1
      description: >
        Contains the PTP capabilities supported by each of the UE(s).
        The key of the map is the gpsi.
    required:
      - upNodeId
  anyOf:
    - required: [gmCapables]
    - required: [asTimeRes]

TimeSyncExposureConfig:
  description: Contains the Time Synchronization Configuration parameters.
  type: object
  properties:
    upNodeId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uint64'
    reqPtpIns:
      $ref: '#/components/schemas/PtpInstance'
    gmEnable:
      type: boolean
      description: >
        Indicates that the AF requests 5GS to act as a grandmaster for PTP
        or gPTP if it is included and set to true.
    gmPrio:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    timeDom:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    timeSyncErrBdgt:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
    configNotifId:
      type: string
      description: Notification Correlation ID assigned by the NF service consumer.

```

```

    configNotifUri:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    tempValidity:
      $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/TemporalValidity'
  required:
    - upNodeId
    - reqPtpIns
    - timeDom
    - configNotifId
    - configNotifUri

TimeSyncExposureSubsNotif:
  description: Contains the notification of time synchronization capability.
  type: object
  properties:
    subsNotifId:
      type: string
      description: Notification Correlation ID assigned by the NF service consumer.
    eventNotifs:
      type: array
      items:
        $ref: '#/components/schemas/SubsEventNotification'
      minItems: 1
  required:
    - subsNotifId
    - eventNotifs

SubsEventNotification:
  description: Notifications about subscribed Individual Events.
  type: object
  properties:
    event:
      $ref: '#/components/schemas/SubscribedEvent'
    timeSyncCapas:
      type: array
      items:
        $ref: '#/components/schemas/TimeSyncCapability'
      minItems: 1
  required:
    - event

TimeSyncExposureConfigNotif:
  description: Contains the notification of time synchronization service state.
  type: object
  properties:
    configNotifId:
      type: string
      description: Notification Correlation ID assigned by the NF service consumer.
    stateOfConfig:
      $ref: '#/components/schemas/StateOfConfiguration'
  required:
    - configNotifId
    - stateOfConfig

PtpCapabilitiesPerUe:
  description: Contains the supported PTP capabilities per UE.
  type: object
  properties:
    gpsi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
    ptpCaps:
      type: array
      items:
        $ref: '#/components/schemas/EventFilter'
      minItems: 1
  required:
    - gpsi
    - ptpCaps

EventFilter:
  description: >
    Contains the filter conditions to match for notifying the event(s) of time
    synchronization capabilities.
  type: object
  properties:
    instanceTypes:
      type: array
      items:
        $ref: '#/components/schemas/InstanceType'
      minItems: 1

```

```

    transProtocols:
      type: array
      items:
        $ref: '#/components/schemas/Protocol'
      minItems: 1
    ptpProfiles:
      type: array
      items:
        type: string
      minItems: 1
  PtpInstance:
    description: Contains PTP instance configuration and activation requested by the AF.
    type: object
    properties:
      instanceType:
        $ref: '#/components/schemas/InstanceType'
      protocol:
        $ref: '#/components/schemas/Protocol'
      ptpProfile:
        type: string
      portConfigs:
        type: array
        items:
          $ref: '#/components/schemas/ConfigForPort'
        minItems: 1
    required:
      - instanceType
      - protocol
      - ptpProfile

  ConfigForPort:
    description: Contains configuration for each port.
    type: object
    properties:
      gpsi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      n6Ind:
        type: boolean
      ptpEnable:
        type: boolean
      logSyncInter:
        type: integer
      logSyncInterInd:
        type: boolean
      logAnnouInter:
        type: integer
      logAnnouInterInd:
        type: boolean

  StateOfConfiguration:
    description: Contains the state of the time synchronization configuration.
    type: object
    properties:
      stateOfNwtt:
        type: boolean
        description: >
          When the PTP port state is Leader, Follower or Passive, it is included and set to true
          to indicate the state of configuration for NW-TT port is active; when PTP port state is
          in any other case, it is included and set to false to indicate the state of
          configuration for NW-TT port is inactive. Default value is false.
      stateOfDstts:
        description: >
          Contains the PTP port states of the DS-TT(s).
        type: array
        items:
          $ref: '#/components/schemas/StateOfDstt'
        minItems: 1

  StateOfDstt:
    description: Contains the PTP port state of a DS-TT.
    type: object
    properties:
      gpsi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      state:
        type: boolean
        description: >
          When the PTP port state is Leader, Follower or Passive, it is included and set to true
          to indicate the state of configuration for DS-TT port is active; when PTP port state is

```

in any other case, it is included and set to false to indicate the state of configuration for DS port is inactive. Default value is false.

required:

- gpsi
- state

Protocol:

anyOf:

- type: string

enum:

- ETH
- IPV4
- IPV6

- type: string

description: >

This string identifies supported protocol.

description: |

Possible values are:

- ETH: Indicates Ethernet as defined in IEEE Std 1588 [45] Annex E is supported.
- IPV4: Indicates IPv4 as defined in IEEE Std 1588 [45] Annex C is supported.
- IPV6: Indicates IPv6 as defined in IEEE Std 1588 [45] Annex D is supported.

GmCapable:

anyOf:

- type: string

enum:

- GTP
- PTP

- type: string

description: >

This string identifies supported grandmaster.

description: |

Possible values are:

- GTP: gPTP grandmaster is supported.
- PTP: PTP grandmaster is supported.

InstanceType:

anyOf:

- type: string

enum:

- BOUNDARY_CLOCK
- E2E_TRANS_CLOCK
- P2P_TRANS_CLOCK
- P2P_RELAY_INSTANCE

- type: string

description: >

This string identifies supported PTP instance type.

description: |

Possible values are:

- BOUNDARY_CLOCK: Indicates Boundary Clock as defined in IEEE Std 1588.
- E2E_TRANS_CLOCK: Indicates End-to-End Transparent Clock as defined in IEEE Std 1588.
- P2P_TRANS_CLOCK: Indicates Peer-to-Peer Transparent Clock as defined in IEEE Std 1588.
- P2P_RELAY_INSTANCE: Indicates PTP Relay instance as defined in IEEE Std 802.1AS.

SubscribedEvent:

anyOf:

- type: string

enum:

- AVAILABILITY_FOR_TIME_SYNC_SERVICE

- type: string

description: >

This string identifies supported event.

description: |

Possible values are:

- AVAILABILITY_FOR_TIME_SYNC_SERVICE: The UE is availability for time synchronization

service.

AsTimeResource:

anyOf:

- type: string

enum:

- ATOMIC_CLOCK
- GNSS
- TERRESTRIAL_RADIO
- SERIAL_TIME_CODE
- PTP
- NTP
- HAND_SET
- INTERNAL_OSCILLATOR

```

- OTHER
- type: string
  description: >
    This string identifies the supported 5G clock quality.
description: |
  Possible values are:
  - ATOMIC_CLOCK: Indicates atomic clock is supported.
  - GNSS: Indicates Global Navigation Satellite System is supported.
  - TERRESTRIAL_RADIO: Indicates terrestrial radio is supported.
  - SERIAL_TIME_CODE: Indicates serial time code is supported.
  - PTP: Indicates PTP is supported.
  - NTP: Indicates NTP is supported.
  - HAND_SET: Indicates hand set is supported.
  - INTERNAL_OSCILLATOR: Indicates internal oscillator is supported.
  - OTHER: Indicates other source of time is supported.

```

A.14 EcsAddressProvision API

```

openapi: 3.0.0
info:
  title: 3gpp-ecs-address-provision
  version: 1.0.1
  description: |
    API for ECS Address Provisioning.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: >
    3GPP TS 29.522 V17.7.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
security:
- {}
- oAuth2ClientCredentials: []
servers:
- url: '{apiRoot}/3gpp-ecs-address-provision/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /{afId}/configurations:
    get:
      summary: Read all active configurations for a given AF
      operationId: ReadAllConfigurations
      tags:
      - ECS Address Provision Configurations (Collection)
      parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
      responses:
        '200':
          description: OK (Successful get all of the active resources for the AF)
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/EcsAddressProvision'
                minItems: 0
        '307':
          $ref: '#/components/responses/307'
        '308':
          $ref: '#/components/responses/308'
        '400':
          $ref: '#/components/responses/400'
        '401':
          $ref: '#/components/responses/401'
        '403':
          $ref: '#/components/responses/403'
        '404':
          $ref: '#/components/responses/404'

```

```

    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

post:
  summary: Creates a new configuration resource
  operationId: CreateNewConfiguration
  tags:
    - ECS Address Provision Configurations (Collection)
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
  requestBody:
    description: new resource creation
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/EcsAddressProvision'
  responses:
    '201':
      description: Created (Successful creation)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/EcsAddressProvision'
      headers:
        Location:
          description: 'Contains the URI of the newly created resource'
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{afId}/configurations/{configurationId}:
  get:
    summary: Read an active resource for the AF and the configuration Id
    operationId: ReadAnConfiguration
    tags:
      - Individual ECS Address Provision Configuration
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:

```



```

    type: string
  - name: configurationId
    in: path
    description: Identifier of the configuration resource
    required: true
    schema:
      type: string
responses:
  '200':
    description: OK (Successful get the active resource)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/EcsAddressProvision'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Fully updates/replaces an existing resource
  operationId: FullyUpdateAnConfiguration
  tags:
    - Individual ECS Address Provision Configuration
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: configurationId
      in: path
      description: Identifier of the configuration resource
      required: true
      schema:
        type: string
  requestBody:
    description: Parameters to update/replace the existing resource
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/EcsAddressProvision'
  responses:
    '200':
      description: OK (Successful update of the existing resource)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/EcsAddressProvision'
    '204':
      description: >
        Successful case. The resource has been successfully updated and no additional
        content is sent in the response message.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

delete:

```

summary: Deletes an already existing configuration resource
operationId: DeleteAnConfiguration

```

tags:

- Individual ECS Address Provision Configuration

parameters:

- name: afId
 in: path
 description: Identifier of the AF
 required: true
 schema:
 type: string
- name: configurationId
 in: path
 description: Identifier of the configuration resource
 required: true
 schema:
 type: string

responses:

```

  '204':
    description: No Content (Successful deletion of the existing resource)
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

components:

securitySchemes:

```

  oAuth2ClientCredentials:
    type: oauth2
    flows:
      clientCredentials:
        tokenUrl: '{tokenUrl}'
        scopes: {}

```

schemas:

```

  EcsAddressProvision:
    description: Represents ECS address provision configuration.
    type: object
    properties:
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'

```

```

ecsServerAddr:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/EcsServerAddr'
spatialValidityCond:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/SpatialValidityCond'
tgtUe:
  $ref: 'TS29522_AnalyticsExposure.yaml#/components/schemas/TargetUeId'
suppFeat:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
required:
- ecsServerAddr
- suppFeat

```

A.15 AMPolicyAuthorization API

```

openapi: 3.0.0
info:
  title: 3gpp-am-policyauthorization
  version: 1.0.2
  description: |
    API for AM policy authorization.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: >
    3GPP TS 29.522 V17.8.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
security:
- {}
- oAuth2ClientCredentials: []
servers:
- url: '{apiRoot}/3gpp-am-policyauthorization/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /{afId}/app-am-contexts:
    post:
      summary: Creates a new Individual application AM Context resource
      operationId: PostAppAmContexts
      tags:
      - Application AM Contexts
      parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
      requestBody:
        description: new resource creation
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/AppAmContextExpData'
      responses:
        '201':
          description: Created (Successful creation)
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AppAmContextExpRespData'
          headers:
            Location:
              description: Contains the URI of the newly created resource.
              required: true
              schema:
                type: string
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'

```

```

'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
callbacks:
  amEventNotification:
    '{$request.body#/evSubscs/eventNotifUri}':
      post:
        requestBody:
          description: Notification of an event occurrence.
          required: true
          content:
            application/json:
              schema:
                $ref:
'TS29534_Npcf_AMPolicyAuthorization.yaml#/components/schemas/AmEventsNotification'
      responses:
        '204':
          description: The receipt of the notification is acknowledged
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29122_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29122_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29122_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{afId}/app-am-contexts/{appAmContextId}:
  get:
    summary: read an existing Individual application AM context
    operationId: GetAppAmContext
    tags:
      - Individual Application AM Context
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
      - name: appAmContextId
        in: path
        description: Identifier of the Individual application AM context
        required: true
        schema:
          type: string
    responses:

```

```

'200':
  description: OK (A representation of the resource is successfully returned)
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/AppAmContextExpData'
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'406':
  $ref: 'TS29122_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

patch:
  summary: partial modifies an existing Individual application AM context
  operationId: ModAppAmContext
  tags:
    - Individual Application AM Context
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: appAmContextId
      in: path
      description: Identifier of the application AM context resource
      required: true
      schema:
        type: string
  requestBody:
    required: true
    content:
      application/merge-patch+json:
        schema:
          $ref: '#/components/schemas/AppAmContextExpUpdateData'
  responses:
    '200':
      description: >
        successful modification of the resource and a representation of that
        resource is returned. If a subscribed event is matched, the event
        notification is also included in the response.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AppAmContextExpRespData'
    '204':
      description: The successful modification
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

delete:

```

summary: Deletes an existing Individual Application AM Context
operationId: DeleteAppAmContext
tags:
  - Individual Application AM Context
parameters:
  - name: afId
    in: path
    description: Identifier of the AF
    required: true
    schema:
      type: string
  - name: appAmContextId
    in: path
    description: string identifying the Individual application AM context resource
    required: true
    schema:
      type: string
responses:
  '204':
    description: The deletion is confirmed without returning additional data.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

/{afId}/app-am-contexts/{appAmContextId}/events-subscription:

put:

```

summary: creates or modifies an AM Policy Events Subscription sub-resource.
operationId: UpdateAmEventsSubsc
tags:
  - AM Policy Events Subscription
parameters:
  - name: afId
    in: path
    description: Identifier of the AF
    required: true
    schema:
      type: string
  - name: appAmContextId
    in: path
    description: string identifying the AM Policy Events Subscription subresource

```

```

    required: true
    schema:
      type: string
  requestBody:
    description: >
      Creation or modification of an application AM Policy Events Subscription sub-resource.
    required: true
    content:
      application/json:
        schema:
          $ref: 'TS29534_Npcf_AMPolicyAuthorization.yaml#/components/schemas/AmEventsSubscData'
  responses:
    '201':
      description: >
        The creation of the application AM Policy Events Subscription sub-resource
        is confirmed and its representation is returned. If an AM Event is matched,
        the response also includes the notification.
      content:
        application/json:
          schema:
            $ref:
'TS29534_Npcf_AMPolicyAuthorization.yaml#/components/schemas/AmEventsSubscRespData'
      headers:
        Location:
          description: >
            Contains the URI of the created AM Policy Events Subscription
            subresource, according to the structure
            {apiRoot}/3gpp-am-policyauthorization/v1/{afId}/app-am-
            contexts/{appAmContextId}/events-subscription
          required: true
          schema:
            type: string
    '200':
      description: >
        The modification of the AM Policy Events Subscription subresource is confirmed
        and its representation is returned. If an AM Event is matched, the response also
        includes the notification.
      content:
        application/json:
          schema:
            $ref:
'TS29534_Npcf_AMPolicyAuthorization.yaml#/components/schemas/AmEventsSubscRespData'
    '204':
      description: >
        The modification of the AM Policy Events Subscription subresource is confirmed
        without returning additional data.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  callbacks:
    amEventNotification:
      '{$request.body#/evSubscs/eventNotifUri}':
        post:
          requestBody:
            description: Contains the information for the notification of an event occurrence.

```

```

    required: true
    content:
      application/json:
        schema:
          $ref:
' TS29534_Npcf_AMPolicyAuthorization.yaml#/components/schemas/AmEventsNotification'
  responses:
    '204':
      description: The receipt of the notification is acknowledged.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  delete:
    summary: deletes the AM Policy Events Subscription sub-resource
    operationId: DeleteAmEventsSubsc
    tags:
      - AM Policy Events Subscription
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
      - name: appAmContextId
        in: path
        description: string identifying the Individual Application AM Context resource.
        required: true
        schema:
          type: string
    responses:
      '204':
        description: >
          The deletion of the of the AM Policy Events Subscription subresource
          is confirmed without returning additional data.
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```



```

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    AppAmContextExpData:
      description: Represents an Individual application AM context exposure resource.
      type: object
      properties:
        self:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
        evSubscs:
          $ref: 'TS29534_Npcf_AMPolicyAuthorization.yaml#/components/schemas/AmEventsSubscData'
        gpsi:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
        highThruInd:
          type: boolean
        covReqs:
          type: array
          items:
            $ref: '#/components/schemas/GeographicalArea'
          minItems: 1
          nullable: true
        policyDuration:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSecRm'
        suppFeat:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
        requestTestNotification:
          type: boolean
          description: >
            Set to true by the AF to request the NEF to send a test notification
            as defined in clause 5.2.5.3 of 3GPP TS 29.122. Set to false or omitted otherwise.
        websocketNotifConfig:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
      required:
        - gpsi
      anyOf:
        - required: [highThruInd]
        - required: [covReqs]

    AppAmContextExpUpdateData:
      description: >
        Contains the modification(s) to be applied to the Individual application
        AM context exposure resource.
      type: object
      properties:
        evSubscs:
          $ref: 'TS29534_Npcf_AMPolicyAuthorization.yaml#/components/schemas/AmEventsSubscDataRm'
        highThruInd:
          type: boolean
        covReqs:
          type: array
          items:
            $ref: '#/components/schemas/GeographicalArea'
          minItems: 1
        policyDuration:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'

    GeographicalArea:
      description: Contains geographical area information (e.g.a civic address or shapes).
      type: object
      properties:
        civicAddress:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/CivicAddress'
        shapes:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/GeographicArea'

    AppAmContextExpRespData:
      description: >
        It represents a response to a modification or creation request of an Individual
        Application AM resource. It may contain the notification of the already met events
      anyOf:
        - $ref: 'TS29534_Npcf_AMPolicyAuthorization.yaml#/components/schemas/AppAmContextData'

```

- \$ref: 'TS29534_Npcf_AMPolicyAuthorization.yaml#/components/schemas/AmEventsNotification'

A.16 AMInfluence API

```

openapi: 3.0.0
info:
  title: AMInfluence
  version: 1.0.1
  description: |
    AMInfluence API Service.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: >
    3GPP TS 29.522 V17.7.0; 5G System; Network Exposure Function Northbound APIs.
  url: https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/
servers:
  - url: '{apiRoot}/3gpp-am-influence/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501
security:
  - {}
  - oAuth2ClientCredentials: []
paths:
  /{afId}/subscriptions:
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
    get:
      summary: Read all of the active subscriptions for the AF.
      tags:
        - AM Influence Subscription
      responses:
        '200':
          description: OK (Successful get all of the active subscriptions for the AF).
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/AmInfluSub'
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'
    post:
      summary: Create a new subscription to AM influence.
      operationId: CreateAMInfluenceSubscription
      tags:
        - AM Influence Subscription
      requestBody:

```

```

    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/AmInfluSub'
  responses:
    '201':
      description: Create a new Individual AM Influence Subscription resource.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AmInfluSub'
      headers:
        Location:
          description: >
            Contains the URI of the newly created resource, according to the structure
            {apiRoot}/3gpp-am-influence/v1/{afId}/subscriptions/{subscriptionId}.
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  callbacks:
    notificationDestination:
      '{$request.body#/notificationDestination}':
        post:
          requestBody:
            required: true
            content:
              application/json:
                schema:
                  type: array
                  items:
                    $ref: '#/components/schemas/AmInfluEventNotif'
                  minItems: 1
          responses:
            '204':
              description: No Content, Notification was succesfull
            '307':
              $ref: 'TS29122_CommonData.yaml#/components/responses/307'
            '308':
              $ref: 'TS29122_CommonData.yaml#/components/responses/308'
            '400':
              $ref: 'TS29122_CommonData.yaml#/components/responses/400'
            '401':
              $ref: 'TS29122_CommonData.yaml#/components/responses/401'
            '403':
              $ref: 'TS29122_CommonData.yaml#/components/responses/403'
            '404':
              $ref: 'TS29122_CommonData.yaml#/components/responses/404'
            '411':
              $ref: 'TS29122_CommonData.yaml#/components/responses/411'
            '413':
              $ref: 'TS29122_CommonData.yaml#/components/responses/413'
            '415':
              $ref: 'TS29122_CommonData.yaml#/components/responses/415'
            '429':
              $ref: 'TS29122_CommonData.yaml#/components/responses/429'

```

```

    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  /{afId}/subscriptions/{subscriptionId}:
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF.
        required: true
        schema:
          type: string
      - name: subscriptionId
        in: path
        description: Identifier of the subscription resource.
        required: true
        schema:
          type: string
    get:
      summary: Read an active subscription identified by the subscriptionId.
      tags:
        - Individual AM Influence Subscription
      responses:
        '200':
          description: OK (Successful get the active subscription)
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AmInfluSub'
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'
    put:
      summary: Update/Replace an existing subscription resource.
      tags:
        - Individual AM Influence Subscription
      requestBody:
        description: Parameters to update/replace the existing subscription.
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/AmInfluSub'
      responses:
        '200':
          description: OK (Successful update of the subscription)
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/AmInfluSub'
        '204':
          description: No Content
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
patch:
  summary: Update/Replace an existing subscription resource.
  tags:
    - Individual AM Influence Subscription
  requestBody:
    required: true
    content:
      application/merge-patch+json:
        schema:
          $ref: '#/components/schemas/AmInfluSubPatch'
  responses:
    '200':
      description: OK. The subscription was modified successfully.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AmInfluSub'
    '204':
      description: No Content
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
delete:
  summary: Delete an existing subscription.
  tags:
    - Individual AM Influence Subscription
  responses:
    '204':
      description: No Content (Successful deletion of the existing subscription)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes: {}
schemas:
  AmInfluSub:
    description: Represents an AM influence subscription.
    type: object
    properties:
      afTransId:
        type: string
      gpsi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      externalGroupId:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
      anyUeInd:
        type: boolean
        description: >
          Identifies whether the AF request applies to any UE. This attribute shall
          set to "true" if applicable for any UE, otherwise, set to "false".
      dnnSnssaiInfos:
        type: array
        items:
          $ref: '#/components/schemas/DnnSnssaiInformation'
        minItems: 1
        description: Each of the element identifies a (DNN, S-NSSAI) combination.
      afAppIds:
        type: array
        items:
          type: string
          minItems: 1
        description: Each of the element identifies an application.
      highThruInd:
        type: boolean
      geoAreas:
        type: array
        items:
          $ref: 'TS29522_AMPolicyAuthorization.yaml#/components/schemas/GeographicalArea'
        minItems: 1
        description: Identifies geographic areas of the user where the request is applicable.
      policyDuration:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'
      self:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      subscribedEvents:
        type: array
        items:
          $ref: '#/components/schemas/AmInfluEvent'
        minItems: 1
        description: Indicates one or more AM influence related events.
      notificationDestination:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
      requestTestNotification:
        type: boolean
        description: >
          Set to true by the AF to request the NEF to send a test notification
          as defined in clause 5.2.5.3 of 3GPP TS 29.122. Set to false or omitted otherwise.
      websocketNotifConfig:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'

```

```

    suppFeat:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    required:
      - afTransId
    anyOf:
      - required: [highThruInd]
      - required: [geoAreas]
    oneOf:
      - required: [gpsi]
      - required: [externalGroupId]
      - required: [anyUeInd]
  AmInfluSubPatch:
    description: >
      Represents parameters to request the modification of an AM influence subscription resource.
    type: object
    properties:
      highThruInd:
        type: boolean
        nullable: true
      geoAreas:
        type: array
        items:
          $ref: 'TS29572_Nlmf_Location.yaml#/components/schemas/GeographicArea'
        minItems: 1
        description: Identifies geographic areas of the user where the request is applicable.
        nullable: true
      policyDuration:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSecRm'
      dnnSnssaiInfos:
        type: array
        items:
          $ref: '#/components/schemas/DnnSnssaiInformation'
        minItems: 1
        nullable: true
        description: Each of the element identifies a (DNN, S-NSSAI) combination.
      afAppIds:
        type: array
        items:
          type: string
        minItems: 1
        nullable: true
        description: Each of the element identifies an application.
      subscribedEvents:
        type: array
        items:
          $ref: '#/components/schemas/AmInfluEvent'
        minItems: 1
        nullable: true
        description: Indicates one or more AM influence related events.
      notificationDestination:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/LinkRm'
  AmInfluEventNotif:
    description: Represents an AM influence event notification.
    type: object
    properties:
      afTransId:
        type: string
      event:
        $ref: '#/components/schemas/AmInfluEvent'
      geoAreas:
        type: array
        items:
          $ref: 'TS29522_AMPolicyAuthorization.yaml#/components/schemas/GeographicalArea'
        minItems: 1
        description: Identifies geographic areas of the user where the request is applicable.
    required:
      - event
      - afTransId
  DnnSnssaiInformation:
    description: Represents a (DNN, SNSSAI) combination.
    type: object
    properties:
      dnn:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
      snssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'

```

ENUMERATIONS DATA TYPES

```
#
AmInfluEvent:
  description: Represents the service area coverage outcome event.
  anyOf:
    - type: string
      enum:
        - SERVICE_AREA_COVRG_OUTCOME
    - type: string
      description: >
        This string provides forward-compatibility with future extensions to the enumeration but
        is not used to encode content defined in the present version of this API.
```

A.17 MBSTMGI API

```
openapi: 3.0.0
info:
  title: 3gpp-mbs-tmgi
  version: 1.0.5
  description: |
    API for the allocation, deallocation and management of TMGI(s) for MBS.
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: >
    3GPP TS 29.522 V17.15.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'

security:
  - {}
  - oAuth2ClientCredentials: []

servers:
  - url: '{apiRoot}/3gpp-mbs-tmgi/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.

paths:
  /allocate:
    post:
      summary: Request the allocation of TMGI(s) for new MBS session(s) or the refresh of the expiry
      time of already allocated TMGI(s).
      operationId: AllocateTmgi
      tags:
        - TMGI Allocation or Timer Expiry Refresh
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/TmgiAllocRequest'
      responses:
        '200':
          description: >
            OK. Successful case. The allocated TMGI(s) or a refreshed expiry time for the concerned
            already allocated TMGI(s) is/are returned to the requesting AF.
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/TmgiAllocResponse'
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          description: >
            The request is rejected by the NEF and more details (along with ProblemDetails) may be
            returned.
          content:
```



```

    application/problem+json:
      schema:
        $ref: '#/components/schemas/ProblemDetailsTmgiAlloc'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
callbacks:
  TmgiTimerExpiryNotification:
    '{$request.body#/notificationUri}':
      post:
        requestBody:
          description: >
            Represents the MBS TMGI(s) timer expiry notification information (e.g. list of
            TMGI(s) for which the timer has expired).
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/ExpiryNotif'
        responses:
          '204':
            description: No content. The notification is successfully received.
          '307':
            $ref: 'TS29122_CommonData.yaml#/components/responses/307'
          '308':
            $ref: 'TS29122_CommonData.yaml#/components/responses/308'
          '400':
            $ref: 'TS29122_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29122_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29122_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29122_CommonData.yaml#/components/responses/404'
          '411':
            $ref: 'TS29122_CommonData.yaml#/components/responses/411'
          '413':
            $ref: 'TS29122_CommonData.yaml#/components/responses/413'
          '415':
            $ref: 'TS29122_CommonData.yaml#/components/responses/415'
          '429':
            $ref: 'TS29122_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29122_CommonData.yaml#/components/responses/500'
          '503':
            $ref: 'TS29122_CommonData.yaml#/components/responses/503'
          default:
            $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/deallocate:
  post:
    summary: Request the deallocation of MBS TMGI(s).
    operationId: DeallocateTmgi
    tags:
      - MBS TMGI Deallocation
    requestBody:
      required: true
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/TmgiDeallocRequest'
    responses:
      '204':
        description: No Content. Successful case, the TMGI(s) are deallocated.
      '307':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

components:

```

securitySchemes:
  oAuth2ClientCredentials:
    type: oauth2
    flows:
      clientCredentials:
        tokenUrl: '{tokenUrl}'
        scopes: {}

```

schemas:

```

TmgiAllocRequest:
  description: >
    Represents the full set of parameters to initiate an MBS TMGI(s) allocation request
    or the refresh of the expiry time of already allocated TMGI(s).
  type: object
  properties:
    afd:
      type: string
    tmgiParams:
      $ref: 'TS29532_NmbSmf_TMGI.yaml#/components/schemas/TmgiAllocate'
    notificationUri:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Uri'
    mbsServiceArea:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceArea'
    extMbsServiceArea:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/ExternalMbsServiceArea'
    requestTestNotification:
      type: boolean
    websocketNotifConfig:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/WebsocketNotifConfig'
    suppFeat:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  required:
    - afd
    - tmgiParams
  not:
    required: [mbsServiceArea, extMbsServiceArea]

```

```

TmgiAllocResponse:
  description: >
    Represents MBS TMGI(s) allocation information or the refreshed expiry time for
    already allocated TMGI(s)
  type: object
  properties:
    tmgiInfo:
      $ref: 'TS29532_NmbSmf_TMGI.yaml#/components/schemas/TmgiAllocated'
    suppFeat:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  required:
    - tmgiInfo

```

```

TmgiDeallocRequest:

```

```

description: Represents information to request the deallocation of MBS TMGI(s).
type: object
properties:
  afId:
    type: string
  tmgis:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Tmgi'
    minItems: 1
required:
  - afId
  - tmgis

ExpiryNotif:
description: Represents MBS TMGI(s) timer expiry notification information.
type: object
properties:
  tmgis:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Tmgi'
    minItems: 1
required:
  - tmgis

ReducedMbsServArea:
description: >
  Represents the reduced MBS Service area information.
type: object
properties:
  reducedMbsServArea:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceArea'
  reducedExtMbsServArea:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/ExternalMbsServiceArea'
  reducedMbsServAreas:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceArea'
    minItems: 1
  reducedExtMbsServAreas:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/ExternalMbsServiceArea'
    minItems: 1
oneOf:
  - required: [reducedMbsServArea]
  - required: [reducedExtMbsServArea]
allOf:
  - not:
    required: [reducedMbsServArea, reducedExtMbsServAreas]
  - not:
    required: [reducedExtMbsServArea, reducedMbsServAreas]

ProblemDetailsTmgiAlloc:
description: >
  Represents an extension to the ProblemDetails data structure with additional error
  information related to TMGI Allocation.
allOf:
  - $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
  - $ref: '#/components/schemas/ReducedMbsServArea'

```

A.18 MBSSession API

openapi: 3.0.0

info:

```

title: 3gpp-mbs-session
version: 1.1.2
description: |
  API for MBS Session Management.
  © 2023, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
  All rights reserved.

```

```

externalDocs:
  description: >

```

3GPP TS 29.522 V17.12.0; 5G System; Network Exposure Function Northbound APIs.
 url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'

```
servers:
- url: '{apiRoot}/3gpp-mbs-session/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501

security:
- {}
- oAuth2ClientCredentials: []

paths:
/mbs-sessions:
  post:
    summary: Request the creation of a new MBS Session.
    tags:
      - MBS Sessions collection
    operationId: CreateMBSSession
    requestBody:
      description: Representation of the new MBS session to be created at the NEF.
      required: true
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MbsSessionCreateReq'
    responses:
      '201':
        description: >
          Created. Successful creation of a new Individual MBS session resource.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/MbsSessionCreateRsp'
        headers:
          Location:
            description: >
              Contains the URI of the newly created resource, according to the structure
              {apiRoot}/3gpp-mbs-session/v1/mbs-sessions/{mbsSessionRef}
            required: true
            schema:
              type: string
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        description: >
          The request is rejected by the NEF and more details (along with ProblemDetails) may be
          returned.
        content:
          application/problem+json:
            schema:
              $ref: 'TS29522_MBSTMGI.yaml#/components/schemas/ProblemDetailsTmgiAlloc'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29122_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/mbs-sessions/{mbsSessionRef}:
  parameters:
    - name: mbsSessionRef
      in: path
      description: Identifier of the Individual MBS Session resource.
```

```
    required: true
    schema:
      type: string

patch:
  summary: Request the modification of an existing Individual MBS Session resource.
  operationId: ModifyIndMBSSession
  tags:
    - Individual MBS Session
  requestBody:
    required: true
    content:
      application/json-patch+json:
        schema:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/PatchItem'
          minItems: 1
  responses:
    '200':
      description: >
        OK. The Individual MBS Session was successfully updated and MBS Session update related
        information shall be returned in the response body.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MbsSessionUpdateResp'
    '204':
      description: >
        No Content. The concerned Individual MBS Session resource was successfully modified.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Request the Deletion of an existing Individual MBS Session resource.
  operationId: DeleteIndMBSSession
  tags:
    - Individual MBS Session
  responses:
    '204':
      description: >
        No Content. Successful deletion of the concerned Individual MBS Session resource.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
```

```

'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

/mbs-sessions/subscriptions:

get:

```

summary: Retrieve all the active MBS Sessions subscriptions.
operationId: ReadMBSSessionsSubscs
tags:
  - MBS Session Subscriptions
responses:
  '200':
    description: >
      OK. All the active MBS Session Subscriptions resources managed by the NEF are returned.
    content:
      application/json:
        schema:
          type: array
          items:
            $ref: '#/components/schemas/MbsSessionSubsc'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

post:

```

summary: Request the creation of a new Individual MBS Session subscription resource.
operationId: CreateMBSSessionsSubsc
tags:
  - MBS Session Subscriptions
requestBody:
  description: Request the creation of a new MBS Session subscription resource.
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/MbsSessionSubsc'
responses:
  '201':
    description: >
      Created. Successful creation of a new Individual MBS Session subscription.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/MbsSessionSubsc'
    headers:
      Location:
        description: Contains the URI of the newly created resource, according to the
          structure
          {apiRoot}/3gpp-mbs-session/v1/mbs-sessions/subscriptions/{subscriptionId}
        required: true
        schema:
          type: string
  '400':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
callbacks:
  MBSSessionStatusNotification:
    '{request.body#/notificationUri}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/MbsSessionStatusNotif'
        responses:
          '204':
            description: No Content. Successful reception of the notification.
          '307':
            $ref: 'TS29122_CommonData.yaml#/components/responses/307'
          '308':
            $ref: 'TS29122_CommonData.yaml#/components/responses/308'
          '400':
            $ref: 'TS29122_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29122_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29122_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29122_CommonData.yaml#/components/responses/404'
          '411':
            $ref: 'TS29122_CommonData.yaml#/components/responses/411'
          '413':
            $ref: 'TS29122_CommonData.yaml#/components/responses/413'
          '415':
            $ref: 'TS29122_CommonData.yaml#/components/responses/415'
          '429':
            $ref: 'TS29122_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29122_CommonData.yaml#/components/responses/500'
          '503':
            $ref: 'TS29122_CommonData.yaml#/components/responses/503'
          default:
            $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/mbs-sessions/subscriptions/{subscriptionId}:
  parameters:
    - name: subscriptionId
      in: path
      description: Identifier of the Individual MBS Session Subscription resource.
      required: true
      schema:
        type: string

  get:
    summary: Retrieve an existing Individual MBS Session Subscription resource.
    operationId: ReadIndMBSsessionsSubsc
    tags:
      - Individual MBS Session subscription
    responses:
      '200':
        description: >

```

```

    OK. Successful retrieval of the targeted Individual MBS Session subscription resource.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/MbsSessionSubsc'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

delete:

```

    summary: Request the deletion of an existing Individual MBS Session subscription resource.
    operationId: DeleteIndMBSSessionsSubsc
    tags:
      - Individual MBS Session Subscription
    responses:
      '204':
        description: >
          No Content. Successful deletion of the existing Individual MBS Session subscription
          resource.
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

/mbs-pp:

```

    get:
      summary: Request to retrieve all the active MBS Parameters Provisioning resources at the NEF.
      operationId: GetMBSParamsProvisionings
      tags:
        - MBS Parameters Provisionings
      responses:
        '200':
          description: >
            OK. All the active MBS Parameters Provisioning resources managed by the NEF are
            returned.
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/MbsPpData'
                minItems: 1
        '307':

```



```

    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

post:

summary: Request the creation of a new MBS Parameters Provisioning.

tags:

- MBS Parameters Provisioning

operationId: CreateMBSParamsProvisioning

requestBody:

description: Representation of the new MBS Parameters Provisioning to be created at the NEF.

required: true

content:

application/json:

schema:

\$ref: '#/components/schemas/MbsPpData'

responses:

'201':

description: >

Created. Successful creation of a new Individual MBS Parameters Provisioning resource.

content:

application/json:

schema:

\$ref: '#/components/schemas/MbsPpData'

headers:

Location:

description: >

Contains the URI of the newly created resource, according to the structure
 {apiRoot}/3gpp-mbs-session/v1/mbs-pp/{mbsPpId}

required: true

schema:

type: string

'400':

\$ref: 'TS29122_CommonData.yaml#/components/responses/400'

'401':

\$ref: 'TS29122_CommonData.yaml#/components/responses/401'

'403':

\$ref: 'TS29122_CommonData.yaml#/components/responses/403'

'404':

\$ref: 'TS29122_CommonData.yaml#/components/responses/404'

'411':

\$ref: 'TS29122_CommonData.yaml#/components/responses/411'

'413':

\$ref: 'TS29122_CommonData.yaml#/components/responses/413'

'415':

\$ref: 'TS29122_CommonData.yaml#/components/responses/415'

'429':

\$ref: 'TS29122_CommonData.yaml#/components/responses/429'

'500':

\$ref: 'TS29122_CommonData.yaml#/components/responses/500'

'503':

\$ref: 'TS29122_CommonData.yaml#/components/responses/503'

default:

\$ref: 'TS29122_CommonData.yaml#/components/responses/default'

/mbs-pp/{mbsPpId}:

parameters:

- name: mbsPpId

in: path

description: >

```
    Represents the identifier of the Individual MBS Parameters Provisioning resource.
    required: true
    schema:
      type: string

get:
  summary: Request to retrieve an existing Individual MBS Parameters Provisioning resource.
  operationId: GetIndMBSPARAMSProvisioning
  tags:
    - Individual MBS Parameters Provisioning
  responses:
    '200':
      description: >
        OK. Successful retrieval of the requested Individual MBS Parameters Provisioning resource.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MbsPpData'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Request the update of an existing Individual MBS Parameters Provisioning resource.
  tags:
    - Individual MBS Parameters Provisioning
  operationId: UpdateIndMBSPARAMSProvisioning
  requestBody:
    description: >
      Represents the updated Individual MBS Parameters Provisioning resource representation.
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/MbsPpData'
  responses:
    '200':
      description: >
        OK. The Individual MBS Parameters Provisioning resource is successfully updated and a representation of the updated resource is returned in the response body.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MbsPpData'
    '204':
      description: >
        No Content. The Individual MBS Parameters Provisioning resource is successfully updated.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

patch:

summary: Request the modification of an existing Individual MBS Parameters Provisioning resource.

tags:

- Individual MBS Parameters Provisioning

operationId: ModifyIndMBSParamsProvisioning

requestBody:

description: >

Contains the parameters to request the modification of the Individual Parameters Provisioning resource.

required: true

content:

application/merge-patch+json:

schema:

\$ref: '#/components/schemas/MbsPpDataPatch'

responses:

'200':

description: >

OK. The Individual MBS Parameters Provisioning resource is successfully modified and a representation of the updated resource is returned in the response body.

content:

application/json:

schema:

\$ref: '#/components/schemas/MbsPpData'

'204':

description: >

No Content. The Individual MBS Parameters Provisioning resource is successfully modified.

'307':

\$ref: 'TS29122_CommonData.yaml#/components/responses/307'

'308':

\$ref: 'TS29122_CommonData.yaml#/components/responses/308'

'400':

\$ref: 'TS29122_CommonData.yaml#/components/responses/400'

'401':

\$ref: 'TS29122_CommonData.yaml#/components/responses/401'

'403':

\$ref: 'TS29122_CommonData.yaml#/components/responses/403'

'404':

\$ref: 'TS29122_CommonData.yaml#/components/responses/404'

'411':

\$ref: 'TS29122_CommonData.yaml#/components/responses/411'

'413':

\$ref: 'TS29122_CommonData.yaml#/components/responses/413'

'415':

\$ref: 'TS29122_CommonData.yaml#/components/responses/415'

'429':

\$ref: 'TS29122_CommonData.yaml#/components/responses/429'

'500':

\$ref: 'TS29122_CommonData.yaml#/components/responses/500'

'503':

\$ref: 'TS29122_CommonData.yaml#/components/responses/503'

default:

\$ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:

summary: Request the deletion of an existing Individual MBS Parameters Provisioning resource.

tags:

- Individual MBS Parameters Provisioning

operationId: DeleteIndMBSParamsProvisioning

responses:

'204':

```

description: >
  No Content. The Individual MBS Parameters Provisioning resource is successfully
  deleted.
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```
components:
```

```

securitySchemes:
  oAuth2ClientCredentials:
    type: oauth2
    flows:
      clientCredentials:
        tokenUrl: '{tokenUrl}'
        scopes: {}

```

```
schemas:
```

```
#
# STRUCTURED DATA TYPES
#
```

```

MbsSessionCreateReq:
description: Represents the parameters to request MBS Session creation.
type: object
properties:
  afId:
    type: string
  mbsSession:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsSession'
  suppFeat:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
required:
- afId
- mbsSession

```

```

MbsSessionCreateRsp:
description: Represents the parameters to be returned in an MBS Session creation response..
type: object
properties:
  mbsSession:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsSession'
  eventList:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsSessionEventReportList'
  suppFeat:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
required:
- mbsSession

```

```

MbsSessionSubsc:
description: Represents an MBS Session Subscription.
type: object
properties:
  afId:
    type: string
  subscription:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsSessionSubscription'
  subscriptionId:
    type: string
required:
- afId
- subscription

```

```
MbsSessionStatusNotif:
  description: Represents an MBS Session Status notification.
  type: object
  properties:
    eventList:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsSessionEventReportList'
  required:
    - eventList

MbsPpData:
  description: Represents MBS Parameters Provisioning data.
  type: object
  properties:
    afId:
      type: string
    mbsSessAuthData:
      $ref: '#/components/schemas/MbsSessAuthData'
    suppFeat:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  required:
    - afId

MbsSessAuthData:
  description: Represents the MBS Session Authorization data.
  type: object
  properties:
    extGroupId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
    gpsisList:
      type: object
      additionalProperties:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      minProperties: 1
      description: >
        Represents the list of the GPSI(s) of the member UE(s) constituting the multicast MBS
        group. Any
        value of type string can be used as a key of the map.
    mbsSessionIdList:
      $ref: 'TS29503_Nudm_PP.yaml#/components/schemas/5MbsAuthorizationInfo'
  required:
    - extGroupId
    - mbsSessionIdList

MbsPpDataPatch:
  description: >
    Represents the requested modification to existing MBS Parameters Provisioning data.
  type: object
  properties:
    mbsSessAuthData:
      $ref: '#/components/schemas/MbsSessAuthData'
    suppFeat:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'

MbsSessionUpdateResp:
  description: >
    Represents the parameters to be returned in an MBS Session update response during
    partial success.
  type: object
  properties:
    reducedMbsServArea:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceArea'
    reducedExtMbsServArea:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/ExternalMbsServiceArea'
  not:
    required: [reducedMbsServArea, reducedExtMbsServArea]

#
# SIMPLE DATA TYPES
#
#
# ENUMERATIONS
#
```

A.19 EASDeployment API

```
openapi: 3.0.0
info:
  title: 3gpp-eas-deployment
  version: 1.0.2
  description: |
    API for AF provisioned EAS Deployment.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: >
    3GPP TS 29.522 V17.8.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
security:
- {}
- oAuth2ClientCredentials: []
servers:
- url: '{apiRoot}/3gpp-eas-deployment/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
paths:
  /{afId}/eas-deployment-info:
    get:
      summary: Read all EAS Deployment information for a given AF
      operationId: ReadAllDeployment
      tags:
        - EAS Deployment Information (Collection)
      parameters:
        - name: afId
          in: path
          description: Identifier of the AF
          required: true
          schema:
            type: string
      responses:
        '200':
          description: OK (Successful get all of the EAS Deployment information for the AF)
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/EasDeployInfo'
                minItems: 0
        '307':
          $ref: '#/components/responses/307'
        '308':
          $ref: '#/components/responses/308'
        '400':
          $ref: '#/components/responses/400'
        '401':
          $ref: '#/components/responses/401'
        '403':
          $ref: '#/components/responses/403'
        '404':
          $ref: '#/components/responses/404'
        '406':
          $ref: '#/components/responses/406'
        '429':
          $ref: '#/components/responses/429'
        '500':
          $ref: '#/components/responses/500'
        '503':
          $ref: '#/components/responses/503'
        default:
          $ref: '#/components/responses/default'
    post:
      summary: Create a new Individual EAS Deployment information resource.
      operationId: CreateAnDeployment
      tags:
        - EAS Deployment Information (Collection)
      parameters:
        - name: afId
```

```

    in: path
    description: Identifier of the AF
    required: true
    schema:
      type: string
  requestBody:
    description: new resource creation
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/EasDeployInfo'
  responses:
    '201':
      description: Created (Successful creation)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/EasDeployInfo'
      headers:
        Location:
          description: 'Contains the URI of the newly created resource'
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{afId}/eas-deployment-info/{easDeployInfoId}:
  get:
    summary: Read an active Individual EAS Deployment Information resource for the AF
    operationId: ReadAnDeployment
    tags:
      - Individual EAS Deployment Information
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
      - name: easDeployInfoId
        in: path
        description: Identifier of an EAS Deployment Information.
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK (Successful get the active resource)
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/EasDeployInfo'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'

```

```

'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'406':
  $ref: 'TS29122_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Fully updates/replaces an existing resource
  operationId: FullyUpdateAnDeployment
  tags:
    - Individual EAS Deployment Information
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: easDeployInfoId
      in: path
      description: Identifier of the EAS Deployment information resource
      required: true
      schema:
        type: string
  requestBody:
    description: Parameters to update/replace the existing resource
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/EasDeployInfo'
  responses:
    '200':
      description: OK (Successful update of the existing resource)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/EasDeployInfo'
    '204':
      description: >
        Successful case. The resource has been successfully updated and no additional content is
        sent in the response message.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':

```



```

    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes an already existing EAS Deployment information resource
  operationId: DeleteAnDeployment
  tags:
    - Individual EAS Deployment Information
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: easDeployInfoId
      in: path
      description: Identifier of the EAS Deployment information resource
      required: true
      schema:
        type: string
  responses:
    '204':
      description: No Content (Successful deletion of the existing resource)
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/remove-edis:
  post:
    summary: Remove EAS Deployment Information based on given criteria.
    operationId: DeleteEDIs
    tags:
      - EAS Deployment Information removal
    requestBody:
      description: Criteria to be used for deleting EAS Deployment Information that match them.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/EdiDeleteCriteria'
          required: true
    responses:
      '204':
        description: >
          No Content. The EDIs matching the provided criteria have been successfully deleted.
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'

```

```

'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'

```

```

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    EasDeployInfo:
      description: Represents EAS Deployment Information.
      type: object
      properties:
        self:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Link'
        afServiceId:
          type: string
        fqdnPatternList:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/FqdnPatternMatchingRule'
          minItems: 1
        appId:
          type: string
        dnn:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
        snssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        externalGroupId:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
        dnaiInfos:
          type: object
          additionalProperties:
            $ref: '#/components/schemas/DnaiInformation'
          minProperties: 1
          description: >
            list of DNS server identifier (consisting of IP address and port) and/or IP address(s)
            of the EAS in the local DN for each DNAI. The key of map is the DNAI.
      required:
        - fqdnPatternList
    DnaiInformation:
      description: Represents DNAI information.
      type: object
      properties:
        dnai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnai'
        dnsServIds:
          type: array
          items:
            $ref: '#/components/schemas/DnsServerIdentifier'
          minItems: 1
        easIpAddrs:
          type: array
          items:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
          minItems: 1
      required:
        - dnai
      anyOf:
        - required: [dnsServIds]
        - required: [easIpAddrs]
    DnsServerIdentifier:
      description: Represents DNS server identifier (consisting of IP address and port).
      type: object
      properties:
        dnsServIpAddr:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
        portNumber:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
      required:
        - dnsServIpAddr

```

```

- portNumber

EdiDeleteCriteria:
  description: >
    Contains criteria to be used for deleting EAS Deployment Information entries that match
    them.
  type: object
  properties:
    afId:
      $ref: 'TS29522_AKMA.yaml#/components/schemas/AfId'
    dnnSnssai:
      $ref: 'TS29522_AMInfluence.yaml#/components/schemas/DnnSnssaiInformation'
  anyOf:
    - required: [afId]
    - required: [dnnSnssai]

```

A.20 ASTI API

openapi: 3.0.0

```

info:
  title: 3gpp-asti
  version: 1.0.2
  description: |
    API for ASTI.
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

```

```

externalDocs:
  description: >
    3GPP TS 29.522 V17.14.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'

```

```

security:
- {}
- oAuth2ClientCredentials: []

```

```

servers:
- url: '{apiRoot}/3gpp-asti/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in subclause 5.2.4 of 3GPP TS 29.122.

```

```

paths:
  /{afId}/configurations:
    get:
      summary: read all of the active configurations of 5G access stratum time distribution for the
      AF
      operationId: ReadAllConfigurations
      tags:
        - ASTI Configurations
      parameters:
        - name: afId
          in: path
          description: Identifier of the AF
          required: true
          schema:
            type: string
      responses:
        '200':
          description: OK (Successful get all of the active configurations for the AF)
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/AccessTimeDistributionData'
                minItems: 0
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

post:

```

summary: Creates a new configuration resource
operationId: CreateNewConfiguration
tags:
  - ASTI Configurations
parameters:
  - name: afId
    in: path
    description: Identifier of the AF
    required: true
    schema:
      type: string
requestBody:
  description: new configuration creation
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/AccessTimeDistributionData'
responses:
  '201':
    description: Created (Successful creation)
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/AccessTimeDistributionData'
    headers:
      Location:
        description: 'Contains the URI of the newly created resource'
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

/{afId}/configurations/retrieve:

```

post:
  summary: Request the status of the 5G access stratum time distribution configuration for a
list of UEs.
  operationId: RetrieveStatusofConfiguration
  tags:
    - ASTI Configurations

```

```

parameters:
  - name: afId
    in: path
    description: Identifier of the AF
    required: true
    schema:
      type: string
requestBody:
  description: Contains the list of GPSIs.
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/StatusRequestData'
responses:
  '200':
    description: Successful retrieval of the status of the 5G access stratum time distribution
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/StatusResponseData'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/{afId}/configurations/{configId}:
  get:
    summary: Reads an active configuration for the AF and the configuration Id
    operationId: ReadAnConfiguration
    tags:
      - Individual ASTI Configuration
    parameters:
      - name: afId
        in: path
        description: Identifier of the AF
        required: true
        schema:
          type: string
      - name: configId
        in: path
        description: Identifier of the configuration resource
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK (Successful get the active configuration)
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/AccessTimeDistributionData'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'

```

```

'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'406':
  $ref: 'TS29122_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Modifies an active configuration for the AF and the configuration Id
  operationId: FullyModifyAnConfiguration
  tags:
    - Individual ASTI Configuration
  parameters:
    - name: afId
      in: path
      description: Identifier of the AF
      required: true
      schema:
        type: string
    - name: configId
      in: path
      description: Identifier of the configuration resource
      required: true
      schema:
        type: string
  requestBody:
    description: Parameters to update/replace the existing configuration
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/AccessTimeDistributionData'
  responses:
    '200':
      description: OK (Successful update of the configuration)
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AccessTimeDistributionData'
    '204':
      description: No Content
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes an already existing configuration

```

```

operationId: DeleteAnConfiguration
tags:
  - Individual ASTI Configuration
parameters:
  - name: afId
    in: path
    description: Identifier of the AF
    required: true
    schema:
      type: string
  - name: configId
    in: path
    description: Identifier of the configuration resource
    required: true
    schema:
      type: string
responses:
  '204':
    description: No Content (Successful deletion of the existing configuration)
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

components:

```

securitySchemes:
  oAuth2ClientCredentials:
    type: oauth2
    flows:
      clientCredentials:
        tokenUrl: '{tokenUrl}'
        scopes: {}

```

schemas:

```

AccessTimeDistributionData:
  description: >
    Contains the parameters for the creation of 5G access stratum time distribution
  configuration.
  type: object
  properties:
    gpsis:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      minItems: 1
    exterGroupId:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalGroupId'
    asTimeDisParam:
      $ref: 'TS29565_Ntsctsf_ASTI.yaml#/components/schemas/AsTimeDistributionParam'
    suppFeat:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  required:
    - asTimeDisParam
  oneOf:
    - required: [gpsis]
    - required: [exterGroupId]

StatusRequestData:
  description: >

```

```

    Contains the parameters for retrieval of the status of the access stratum time distribution
    for a list of UEs.
  type: object
  properties:
    gpsis:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      minItems: 1
  required:
    - gpsis

```

```

StatusResponseData:
  description: >
    Contains the parameters for the status of the access stratum time distribution for a list of
    UEs.
  type: object
  properties:
    inactiveUes:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      minItems: 1
    activeUes:
      type: array
      items:
        $ref: '#/components/schemas/ActiveUe'
      minItems: 1

```

```

ActiveUe:
  description: >
    Contains the UE identifier whose status of the access stratum time distribution is active

```

and

```

    the optional requested time synchronization error budget.
  type: object
  properties:
    gpsi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
    timeSyncErrBdgt:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uinteger'

```

A.21 DataReporting API

```

openapi: 3.0.0
info:
  title: 3gpp-data-reporting
  version: 1.0.0
  description: |
    API for 3GPP Data Reporting.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: >
    3GPP TS 29.522 V17.6.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'

security:
  - {}
  - oAuth2ClientCredentials: []

servers:
  - url: '{apiRoot}/3gpp-data-reporting/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in subclause 5.2.4 of 3GPP TS 29.122.

paths:
  /sessions:
    post:
      summary: Create a new Data Reporting Session.
      operationId: CreateDataRepSession
      tags:
        - Data Reporting Sessions
      requestBody:

```



```

description: >
  Representation of the Data Reporting Session to be created in the NEF.
required: true
content:
  application/json:
    schema:
      $ref: 'TS26532_Ndcaf_DataReporting.yaml#/components/schemas/DataReportingSession'
responses:
  '201':
    description: Created. Successful creation of a new Data Reporting Session.
    content:
      application/json:
        schema:
          $ref: 'TS26532_Ndcaf_DataReporting.yaml#/components/schemas/DataReportingSession'
    headers:
      Location:
        required: true
        schema:
          type: string
        description: >
          Contains the URI of the newly created resource, according to the structure
          {apiRoot}/3gpp-data-reporting/v1/sessions/{sessionId}
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/sessions/{sessionId}:
  parameters:
    - name: sessionId
      in: path
      description: Identifier of the Data Reporting Session.
      required: true
      schema:
        type: string
  get:
    summary: Request the retrieval of an existing Individual Data Reporting Session resource.
    operationId: GetIndDataRepSession
    tags:
      - Individual Data Reporting Session
    responses:
      '200':
        description: >
          OK. The requested Individual Data Reporting Session resource is
          Successfully returned.
        content:
          application/json:
            schema:
              $ref: 'TS26532_Ndcaf_DataReporting.yaml#/components/schemas/DataReportingSession'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

put:

```

summary: Request the update of an existing Individual Data Reporting Session resource.
operationId: UpdateIndDataRepSession
tags:
  - Individual Data Reporting Session
requestBody:
  required: true
  content:
    application/json:
      schema:
        $ref: 'TS26532_Ndcaf_DataReporting.yaml#/components/schemas/DataReportingSession'
responses:
  '200':
    description: >
      OK. The Individual Data Reporting Session resource was successfully
      updated.
    content:
      application/json:
        schema:
          $ref: 'TS26532_Ndcaf_DataReporting.yaml#/components/schemas/DataReportingSession'
  '204':
    description: >
      No Content. The Individual Data Reporting Session resource was successfully
      updated and no content is returned in the response body.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

delete:

```

summary: Deletes an already existing Data Reporting Session resource.
operationId: DeleteIndDataRepSession
tags:
  - Individual Data Reporting Session
responses:
  '204':
    description: >
      No Content. The concerned Individual Data Reporting Session resource was
      successfully deleted.
  '307':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

/sessions/{sessionId}/report:

```

```

  parameters:

```

```

    - name: sessionId
      in: path
      description: Identifier of the Data Reporting Session.
      required: true
      schema:
        type: string

```

```

  post:

```

```

    summary: Report collected UE data.
    operationId: ReportUEData
    tags:
      - Individual Data Reporting Session
    requestBody:
      required: true
      content:
        application/json:
          schema:
            $ref: 'TS26532_Ndcaf_DataReporting.yaml#/components/schemas/DataReport'

```

```

  responses:

```

```

    '200':
      description: OK. The UE data report was successfully received.
      content:
        application/json:
          schema:
            $ref: 'TS26532_Ndcaf_DataReporting.yaml#/components/schemas/DataReportingSession'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

components:

```

```

  securitySchemes:

```

```

    oAuth2ClientCredentials:
      type: oauth2
      flows:

```

```

clientCredentials:
  tokenUrl: '{tokenUrl}'
  scopes: {}

```

A.22 DataReportingProvisioning API

```

openapi: 3.0.0
info:
  title: 3gpp-data-reporting-provisioning
  version: 1.0.1
  description: |
    API for 3GPP Data Reporting and Provisioning.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: >
    3GPP TS 29.522 V17.7.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'

security:
- {}
- oAuth2ClientCredentials: []

servers:
- url: '{apiRoot}/3gpp-data-reporting-provisioning/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in subclause 5.2.4 of 3GPP TS 29.122.

paths:
  /sessions:
    post:
      summary: Create a new Data Reporting Provisioning Session.
      operationId: CreateDataRepProvSession
      tags:
      - Data Reporting Provisioning Sessions
      requestBody:
        description: >
          Representation of the Data Reporting Provisioning Session to be created in the NEF.
        required: true
        content:
          application/json:
            schema:
              $ref:
'TS26532_Ndcaf_DataReportingProvisioning.yaml#/components/schemas/DataReportingProvisioningSession'
      responses:
        '201':
          description: Created. Successful creation of a new Data Reporting Provisioning Session.
          content:
            application/json:
              schema:
                $ref:
'TS26532_Ndcaf_DataReportingProvisioning.yaml#/components/schemas/DataReportingProvisioningSession'
        headers:
          Location:
            required: true
            schema:
              type: string
            description: >
              Contains the URI of the newly created resource, according to the structure
              {apiRoot}/3gpp-data-reporting-provisioning/v1/sessions/{sessionId}
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29122_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29122_CommonData.yaml#/components/responses/413'
        '415':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/sessions/{sessionId}:
  parameters:
    - name: sessionId
      in: path
      description: Identifier of the Data Reporting Provisioning Session.
      required: true
      schema:
        type: string
  get:
    summary: Request the retrieval of an existing Individual Data Reporting Provisioning Session
    resource.
    operationId: GetIndDataRepProvSession
    tags:
      - Individual Data Reporting Provisioning Session
    responses:
      '200':
        description: >
          OK. The requested Individual Data Reporting Provisioning Session resource is
          Successfully returned.
        content:
          application/json:
            schema:
              $ref:
                'TS26532_Ndcaf_DataReportingProvisioning.yaml#/components/schemas/DataReportingProvisioningSession'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29122_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

  delete:
    summary: Deletes an already existing Individual Data Reporting Provisioning Session resource.
    operationId: DeleteIndDataRepProvSession
    tags:
      - Individual Data Reporting Provisioning Session
    responses:
      '204':
        description: >
          No Content. The concerned Individual Data Reporting Provisioning Session resource was
          successfully deleted.
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/sessions/{sessionId}/configurations:
  parameters:
    - name: sessionId
      in: path
      description: Identifier of the Data Reporting Provisioning Session.
      required: true
      schema:
        type: string
  post:
    summary: Create a new Data Reporting Configuration resource.
    operationId: CreateDataRepConfig
    tags:
      - Data Reporting Configurations
    requestBody:
      description: >
        Representation of the Data Reporting Configuration to be created in the NEF.
      required: true
      content:
        application/json:
          schema:
            $ref:
'TS26532_Ndcaf_DataReportingProvisioning.yaml#/components/schemas/DataReportingConfiguration'
    responses:
      '201':
        description: Created. Successful creation of a new Data Reporting Configuration.
        content:
          application/json:
            schema:
              $ref:
'TS26532_Ndcaf_DataReportingProvisioning.yaml#/components/schemas/DataReportingConfiguration'
    headers:
      Location:
        required: true
        schema:
          type: string
        description: >
          Contains the URI of the newly created resource, according to the structure
          {apiRoot}/3gpp-data-reporting-
provisioning/v1/sessions/{sessionId}/configurations/{configurationId}
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29122_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/sessions/{sessionId}/configurations/{configurationId}:
  parameters:

```

```

- name: sessionId
  in: path
  description: Identifier of the Data Reporting Provisioning Session.
  required: true
  schema:
    type: string
- name: configurationId
  in: path
  description: Identifier of the Data Reporting Configuration.
  required: true
  schema:
    type: string
get:
  summary: Request the retrieval of an existing Individual Data Reporting Configuration
resource.
  operationId: GetIndDataRepConfig
  tags:
    - Individual Data Reporting Configuration
  responses:
    '200':
      description: >
        OK. The requested Individual Data Reporting Configuration resource is successfully
        returned.
      content:
        application/json:
          schema:
            $ref:
' TS26532_Ndcaf_DataReportingProvisioning.yaml#/components/schemas/DataReportingConfiguration'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Request to update an existing Individual Data Reporting Configuration resource.
  operationId: UpdateIndDataRepConfig
  tags:
    - Individual Data Reporting Configuration
  requestBody:
    required: true
    content:
      application/json:
        schema:
          $ref:
' TS26532_Ndcaf_DataReportingProvisioning.yaml#/components/schemas/DataReportingConfiguration'
  responses:
    '200':
      description: >
        OK. The Individual Data Reporting Configuration resource was successfully updated.
      content:
        application/json:
          schema:
            $ref:
' TS26532_Ndcaf_DataReportingProvisioning.yaml#/components/schemas/DataReportingConfiguration'
    '204':
      description: >

```

```

    No Content. The Individual Data Reporting Configuration resource was successfully
    updated and no content is returned in the response body.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

patch:

```

summary: Request to modify an existing Individual Data Reporting Configuration resource.
operationId: ModifyIndDataRepConfig

```

tags:

```

- Individual Data Reporting Configuration

```

requestBody:

```

required: true

```

content:

```

  application/json:
    schema:
      $ref:

```

```

'TS26532_Ndcnf_DataReportingProvisioning.yaml#/components/schemas/DataReportingConfigurationPatch'

```

responses:

```

  '200':

```

```

    description: >

```

```

      OK. The Individual Data Reporting Configuration resource was successfully modified.

```

```

    content:

```

```

      application/json:
        schema:
          $ref:

```

```

'TS26532_Ndcnf_DataReportingProvisioning.yaml#/components/schemas/DataReportingConfiguration'

```

```

  '204':

```

```

    description: >

```

```

      No Content. The Individual Data Reporting Configuration resource was successfully
      modified and no content is returned in the response body.

```

```

  '307':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/307'

```

```

  '308':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/308'

```

```

  '400':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/400'

```

```

  '401':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/401'

```

```

  '403':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/403'

```

```

  '404':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/404'

```

```

  '411':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/411'

```

```

  '413':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/413'

```

```

  '415':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/415'

```

```

  '429':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/429'

```

```

  '500':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/500'

```

```

  '503':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/503'

```



```

    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes an already existing Data Reporting Configuration resource.
  operationId: DeleteIndDataRepConfig
  tags:
    - Individual Data Reporting Configuration
  responses:
    '204':
      description: >
        No Content. The concerned Individual Data Reporting Configuration resource was
        successfully deleted.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

```

A.23 UEId API

openapi: 3.0.0

```

info:
  title: 3gpp-ueid
  version: 1.0.1
  description: |
    API for UE ID service.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: 3GPP TS 29.522 V17.7.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
security:
  - {}
  - oAuth2ClientCredentials: []

servers:
  - url: '{apiRoot}/3gpp-ueid/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in subclause 5.2.4 of 3GPP TS 29.122.

paths:
  /retrieve:
    post:
      summary: Retrieve AF specific UE ID.
      operationId: RetrieveUEId
      requestBody:
        required: true

```

```

content:
  application/json:
    schema:
      $ref: '#/components/schemas/UeIdReq'
responses:
  '200':
    description: The requested information was returned successfully.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/UeIdInfo'
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
  schemas:
    UeIdReq:
      description: Represents the parameters to request the retrieval of AF specific UE ID.
      type: object
      properties:
        afId:
          type: string
        appPortId:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/Port'
        dnn:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
        ipDomain:
          type: string
        mtcProviderId:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MtcProviderInformation'
        snssai:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
        ueIpAddr:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
        ueMacAddr:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
      required:
        - afId
      oneOf:
        - required: [ueIpAddr]
        - required: [ueMacAddr]
    UeIdInfo:
      description: Represents UE ID information.
      type: object
      properties:
        externalId:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/ExternalId'

```

```
required:
- externalId
```

A.24 MBSUserService API

```
openapi: 3.0.0
```

```
info:
```

```
  title: 3gpp-mbs-us
  version: 1.0.2
  description: |
    API for MBS User Service.
    © 2023, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
```

```
externalDocs:
```

```
  description: >
    3GPP TS 29.522 V17.9.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'
```

```
servers:
```

```
- url: '{apiRoot}/3gpp-mbs-us/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122
```

```
security:
```

```
- {}
- oAuth2ClientCredentials: []
```

```
paths:
```

```
  /mbs-user-services:
    get:
      summary: Retrieve all the active MBS User Service resources managed by the NEF.
      tags:
        - MBS User Services
      operationId: RetrieveMBSUserServices
      responses:
        '200':
          description: >
            OK. All the active MBS User Services managed by the NEF are returned.
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: 'TS29580_Nmbssf_MBSUserService.yaml#/components/schemas/MBSUserService'
                minItems: 0
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'
    post:
      summary: Request the creation of a new Individual MBS User Service resource.
      tags:
        - MBS User Services
```

```

operationId: CreateMBSUserService
requestBody:
  description: >
    Contains the parameters to request the creation of a new MBS User Service at the NEF.
  required: true
  content:
    application/json:
      schema:
        $ref: 'TS29580_Nmbfsf_MBSUserService.yaml#/components/schemas/MBSUserService'
responses:
  '201':
    description: >
      Created. A new MBS User Service is successfully created and a representation of the
      created Individual MBS User Service resource is returned.
    content:
      application/json:
        schema:
          $ref: 'TS29580_Nmbfsf_MBSUserService.yaml#/components/schemas/MBSUserService'
    headers:
      Location:
        description: >
          Contains the URI of the newly created resource, according to the structure
          {apiRoot}/3gpp-mbs-us/v1/mbs-user-services/{mbsUserServId}
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/mbs-user-services/{mbsUserServId}:
  parameters:
    - name: mbsUserServId
      in: path
      description: Identifier of the Individual MBS User Service resource.
      required: true
      schema:
        type: string

  get:
    summary: Retrieve an existing Individual MBS User Service resource.
    tags:
      - Individual MBS User Service
    operationId: RetrieveIndivMBSUserService
    responses:
      '200':
        description: >
          OK. The requested Individual MBS User Service resource is successfully returned.
        content:
          application/json:
            schema:
              $ref: 'TS29580_Nmbfsf_MBSUserService.yaml#/components/schemas/MBSUserService'
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'

```

```

'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'406':
  $ref: 'TS29122_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Request the update of an existing Individual MBS User Service resource.
  tags:
    - Individual MBS User Service
  operationId: UpdateIndivMBSUserService
  requestBody:
    description: >
      Contains the updated representation of the Individual MBS User Service resource.
    required: true
    content:
      application/json:
        schema:
          $ref: 'TS29580_Nmbssf_MBSUserService.yaml#/components/schemas/MBSUserService'
  responses:
    '200':
      description: >
        OK. The concerned Individual MBS User Service resource is successfully updated and a
        representation of the updated resource is returned.
      content:
        application/json:
          schema:
            $ref: 'TS29580_Nmbssf_MBSUserService.yaml#/components/schemas/MBSUserService'
    '204':
      description: >
        No Content. The concerned Individual MBS User Service resource is successfully updated.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

patch:
  summary: Request the modification of an existing Individual MBS User Service resource.
  tags:
    - Individual MBS User Service
  operationId: ModifyIndivMBSUserService
  requestBody:
    description: >
      Contains the parameters to request the modification of the Individual MBS User
      Service resource.

```

```
required: true
content:
  application/merge-patch+json:
    schema:
      $ref: 'TS29580_Nmbf_MBSUserService.yaml#/components/schemas/MBSUserServicePatch'
responses:
  '200':
    description: >
      OK. The concerned Individual MBS User Service resource is successfully modified and a
      representation of the updated resource is returned.
    content:
      application/json:
        schema:
          $ref: 'TS29580_Nmbf_MBSUserService.yaml#/components/schemas/MBSUserService'
  '204':
    description: >
      No Content. The concerned Individual MBS User Service resource is successfully modified.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Deletes an existing Individual MBS User Service resource.
  tags:
    - Individual MBS User Service
  operationId: DeleteIndivMBSUserService
  responses:
    '204':
      description: >
        No Content. The Individual MBS User Service resource is successfully deleted.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
```

```

    type: oauth2
    flows:
      clientCredentials:
        tokenUrl: '{tokenUrl}'
        scopes: {}

#
# STRUCTURED DATA TYPES
#

# SIMPLE DATA TYPES
#

#
# ENUMERATIONS
#

```

A.25 MBSUserDataIngestSession API

```

openapi: 3.0.0

info:
  title: 3gpp-mbs-ud-ingest
  version: 1.0.3
  description: |
    API for MBS User Data Ingest Session.
    © 2023, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: >
    3GPP TS 29.522 V17.11.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'

servers:
- url: '{apiRoot}/3gpp-mbs-ud-ingest/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122

security:
- {}
- oAuth2ClientCredentials: []

paths:
  /sessions:
    get:
      summary: Retrieve all the active MBS User Data Ingest Sessions managed by the NEF.
      tags:
        - MBS User Data Ingest Sessions (Collection)
      operationId: RetrieveMBSUserDataIngestSessions
      responses:
        '200':
          description: >
            OK. All the active MBS User Data Ingest Sessions managed by the NEF are returned.
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref:
                    'TS29580_Nmbsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngSession'
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29122_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

post:
  summary: Request the creation of a new Individual MBS User Data Ingest Session resource.
  tags:
    - MBS User Data Ingest Sessions (Collection)
  operationId: CreateMBSUserDataIngestSession
  requestBody:
    description: >
      Contains the parameters to request the creation of a new MBS User Data Ingest Session
      at the NEF.
    required: true
    content:
      application/json:
        schema:
          $ref:
'TS29580_Nmbssf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngSession'
  responses:
    '201':
      description: >
        Created. A new MBS User Data Ingest Session is successfully created and a representation
        of the created Individual MBS User Data Ingest Session resource is returned.
      content:
        application/json:
          schema:
            $ref:
'TS29580_Nmbssf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngSession'
      headers:
        Location:
          description: >
            Contains the URI of the newly created resource, according to the structure
            {apiRoot}/3gpp-mbs-ud-ingest/v1/sessions/{sessionId}
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/sessions/{sessionId}:
  parameters:
    - name: sessionId
      in: path
      description: Identifier of the Individual MBS User Data Ingest Session resource.
      required: true
      schema:
        type: string

```



```

get:
  summary: Retrieve an existing Individual MBS User Data Ingest Session resource.
  tags:
    - Individual MBS User Data Ingest Session (Document)
  operationId: RetrieveIndivMBSUserDataIngestSession
  responses:
    '200':
      description: >
        OK. The requested Individual MBS User Data Ingest Session resource is successfully
        returned.
      content:
        application/json:
          schema:
            $ref:
'TS29580_Nmbfsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngSession'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Request the update of an existing Individual MBS User Data Ingest Session resource.
  tags:
    - Individual MBS User Data Ingest Session (Document)
  operationId: UpdateIndivMBSUserDataIngestSession
  requestBody:
    description: >
      Contains the updated representation of the Individual MBS User Data Ingest Session
      resource.
    required: true
    content:
      application/json:
        schema:
          $ref:
'TS29580_Nmbfsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngSession'
  responses:
    '200':
      description: >
        OK. The concerned Individual MBS User Data Ingest Session resource is successfully
        updated and a representation of the updated resource is returned.
      content:
        application/json:
          schema:
            $ref:
'TS29580_Nmbfsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngSession'
    '204':
      description: >
        No Content. The concerned Individual MBS User Data Ingest Session resource is
        successfully updated.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

patch:

summary: Request the modification of an existing Individual MBS User Data Ingest Session resource.

tags:

- Individual MBS User Data Ingest Session (Document)

operationId: ModifyIndivMBSUserDataIngestSession

requestBody:

description: >

Contains the parameters to request the modification of the Individual MBS User Data Ingest Session resource.

required: true

content:

application/merge-patch+json:

schema:

\$ref:

'TS29580_Nmbsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngSessionPatch'

responses:

'200':

description: >

OK. The concerned Individual MBS User Data Ingest Session resource is successfully modified and a representation of the updated resource is returned.

content:

application/json:

schema:

\$ref:

'TS29580_Nmbsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngSession'

'204':

description: >

No Content. The concerned Individual MBS User Data Ingest Session resource is successfully modified.

'307':

\$ref: 'TS29122_CommonData.yaml#/components/responses/307'

'308':

\$ref: 'TS29122_CommonData.yaml#/components/responses/308'

'400':

\$ref: 'TS29122_CommonData.yaml#/components/responses/400'

'401':

\$ref: 'TS29122_CommonData.yaml#/components/responses/401'

'403':

\$ref: 'TS29122_CommonData.yaml#/components/responses/403'

'404':

\$ref: 'TS29122_CommonData.yaml#/components/responses/404'

'411':

\$ref: 'TS29122_CommonData.yaml#/components/responses/411'

'413':

\$ref: 'TS29122_CommonData.yaml#/components/responses/413'

'415':

\$ref: 'TS29122_CommonData.yaml#/components/responses/415'

'429':

\$ref: 'TS29122_CommonData.yaml#/components/responses/429'

'500':

\$ref: 'TS29122_CommonData.yaml#/components/responses/500'

'503':

\$ref: 'TS29122_CommonData.yaml#/components/responses/503'

default:

\$ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:

summary: Deletes an existing Individual MBS User Data Ingest Session resource.

tags:

- Individual MBS User Data Ingest Session (Document)

operationId: DeleteIndivMBSUserDataIngestSession

```

responses:
  '204':
    description: >
      No Content. The Individual MBS User Data Ingest Session resource is successfully
      deleted.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/status-subscriptions:
  get:
    summary: Retrieve all the active MBS User Data Ingest Session Status Subscriptions resources
    managed by the NEF.
    tags:
      - MBS User Data Ingest Session Status Subscriptions (Collection)
    operationId: RetrieveMBSUserDataIngStatSubscs
    responses:
      '200':
        description: >
          OK. All the active MBS User Data Ingest Session Status Subscriptions managed by the NEF
          are returned.
        content:
          application/json:
            schema:
              type: array
              items:
                $ref:
'TS29580_Nmbsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngStatSubsc'
            minItems: 0
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29122_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

  post:
    summary: Creates a new Individual MBS User Data Ingest Session Status Subscription resource.
    tags:
      - MBS User Data Ingest Session Status Subscriptions (Collection)
    operationId: CreateMBSUserDataIngStatSubsc
    requestBody:
      description: >
        Contains the parameters to request the creation of a new MBS User Data Ingest Session

```

```

    Status Subscription resource.
    required: true
    content:
      application/json:
        schema:
          $ref:
'TS29580_Nmbsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngStatSubsc'
  responses:
    '201':
      description: >
        Created. Successful creation of a new Individual MBS User Data Ingest Session
        Status Subscription resource.
      content:
        application/json:
          schema:
            $ref:
'TS29580_Nmbsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngStatSubsc'
    headers:
      Location:
        description: Contains the URI of the newly created resource.
        required: true
        schema:
          type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  callbacks:
    mbsUserDataIngestSessionStatusNotif:
      '{request.body#/notifUri}':
        post:
          requestBody:
            required: true
            content:
              application/json:
                schema:
                  $ref:
'TS29580_Nmbsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngStatNotif'
  responses:
    '204':
      description: No Content. Successful reception of the notification.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/status-subscriptions/{subscriptionId}:
  parameters:
    - name: subscriptionId
      in: path
      description: >
        Identifier of the Individual MBS User Data Ingest Session Status Subscription resource.
      required: true
      schema:
        type: string

  get:
    summary: Retrieve an existing Individual MBS User Data Ingest Session Status Subscription
    resource.
    tags:
      - Individual MBS User Data Ingest Session Status Subscription (Document)
    operationId: RetrieveIndMBSUserDataIngStatSubsc
    responses:
      '200':
        description: >
          OK. Successful retrieval of the requested Individual MBS User Data Ingest Session
          Status Subscription resource.
        content:
          application/json:
            schema:
              $ref:
' TS29580_Nmbsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngStatSubsc '
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29122_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

  put:
    summary: Request the update of an existing Individual MBS User Data Ingest Session Status
    Subscription resource.
    tags:
      - Individual MBS User Data Ingest Session Status Subscription (Document)
    operationId: UpdateIndMBSUserDataIngStatSubsc
    requestBody:
      description: >
        Contains the updated representation of the Individual MBS User Data Ingest Session Status
        Subscription resource.
      required: true
      content:
        application/json:
          schema:
            $ref:
' TS29580_Nmbsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngStatSubsc '
    responses:
      '200':
        description: >
          OK. The concerned Individual MBS User Data Ingest Session Status Subscription resource

```

```

    is successfully updated and a representation of the updated resource is returned in the
    response body.
  content:
    application/json:
      schema:
        $ref:
'TS29580_Nmbsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngStatSubsc'
  '204':
    description: >
      No Content. The concerned Individual MBS User Data Ingest Session Status Subscription
      resource is successfully updated and no content is returned in the response body.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

  patch:
    summary: Request the modification of an existing Individual MBS User Data Ingest Session
    Status Subscription resource.
    tags:
      - Individual MBS User Data Ingest Session Status Subscription (Document)
    operationId: ModifyIndMBSUserDataIngStatSubsc
    requestBody:
      description: >
        Contains the parameters to request the modification of the Individual MBS User Data Ingest
        Session Status Subscription resource.
      required: true
      content:
        application/merge-patch+json:
          schema:
            $ref:
'TS29580_Nmbsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngStatSubscPatch'
    responses:
      '200':
        description: >
          OK. The concerned Individual MBS User Data Ingest Session Status Subscription resource
          is successfully modified and a representation of the updated resource is returned in the
          response body.
        content:
          application/json:
            schema:
              $ref:
'TS29580_Nmbsf_MBSUserDataIngestSession.yaml#/components/schemas/MBSUserDataIngStatSubsc'
      '204':
        description: >
          No Content. The concerned Individual MBS User Data Ingest Session Status Subscription
          resource is successfully modified and no content is returned in the response body.
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

delete:

summary: Deletes an existing Individual MBS User Data Ingest Session Status Subscription resource.

tags:

- Individual MBS User Data Ingest Session Status Subscription (Document)

operationId: DeleteIndMBSUserDataIngStatSubsc

responses:

```

  '204':
    description: >
      No Content. Successful deletion of the existing Individual MBS User Data Ingest Session
      Status Subscription resource.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

components:

securitySchemes:

oAuth2ClientCredentials:

type: oauth2

flows:

clientCredentials:

tokenUrl: '{tokenUrl}'

scopes: {}

```

#
# STRUCTURED DATA TYPES
#

```

```

# SIMPLE DATA TYPES
#

```

```

#
# ENUMERATIONS
#

```

A.26 MSEventExposure API

openapi: 3.0.0

info:

```
title: 3gpp-ms-event-exposure
version: 1.0.1
description: |
  API for Media Streaming Event Exposure.
  © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
  All rights reserved.

externalDocs:
  description: >
    3GPP TS 29.522 V17.8.0; 5G System; Network Exposure Function Northbound APIs.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.522/'

servers:
  - url: '{apiRoot}/3gpp-ms-event-exposure/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122

security:
  - {}
  - oAuth2ClientCredentials: []

paths:
  /subscriptions:
    get:
      summary: Retrieve all the active Media Streaming Event Exposure Subscription resources managed
      by the NEF.
      tags:
        - Media Streaming Event Exposure Subscriptions (Collection)
      operationId: RetrieveMSEventExposureSubscs
      responses:
        '200':
          description: >
            OK. All the active Media Streaming Event Exposure Subscriptions managed by the NEF are
            returned.
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AfEventExposureSubsc'
                minItems: 0
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29122_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'

    post:
      summary: Request the creation of a new Individual Media Streaming Event Exposure Subscription
      resource.
      tags:
        - Media Streaming Event Exposure Subscriptions (Collection)
      operationId: CreateMSEventExposureSubsc
      requestBody:
        description: >
          Contains the parameters to request the creation of a new Media Streaming Event Exposure
          Subscriptionat the NEF.
        required: true
        content:
```



```

    application/json:
      schema:
        $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AfEventExposureSubsc'
  responses:
    '201':
      description: >
        Created. Successful creation of a new Individual Media Streaming Event Exposure
        Subscription resource.
      content:
        application/json:
          schema:
            $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AfEventExposureSubsc'
      headers:
        Location:
          description: Contains the URI of the newly created resource.
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  callbacks:
    msEventExposureNotif:
      '{request.body#/notifUri}':
        post:
          requestBody:
            required: true
            content:
              application/json:
                schema:
                  $ref:
' TS29517_Naf_EventExposure.yaml#/components/schemas/AfEventExposureNotif '
      responses:
        '204':
          description: No Content. Successful reception of the notification.
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29122_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29122_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29122_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'

```

```
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/subscriptions/{subscriptionId}:
  parameters:
    - name: subscriptionId
      in: path
      description: Identifier of the Individual Media Streaming Event Exposure Subscription
resource.
  required: true
  schema:
    type: string

get:
  summary: Retrieve an existing Individual Media Streaming Event Exposure Subscription resource.
  tags:
    - Individual Media Streaming Event Exposure Subscription (Document)
  operationId: RetrieveIndivMSEventExposureSubsc
  responses:
    '200':
      description: >
        OK. The requested Individual Media Streaming Event Exposure Subscription resource is
        successfully returned.
      content:
        application/json:
          schema:
            $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AfEventExposureSubsc'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29122_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

put:
  summary: Request the update of an existing Individual Media Streaming Event Exposure
Subscription resource.
  tags:
    - Individual Media Streaming Event Exposure Subscription (Document)
  operationId: UpdateIndivMSEventExposureSubsc
  requestBody:
    description: >
      Contains the updated representation of the Individual Media Streaming Event Exposure
      Subscription resource.
    resource.
    required: true
  content:
    application/json:
      schema:
        $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AfEventExposureSubsc'
  responses:
    '200':
      description: >
        OK. The concerned Individual Media Streaming Event Exposure Subscription resource is
        successfully updated and a representation of the updated resource is returned in the
        response body.
      content:
        application/json:
          schema:
            $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AfEventExposureSubsc'
    '204':
```

```

    description: >
      No Content. The concerned Individual Media Streaming Event Exposure Subscription
      resource was successfully updated and no content is returned in the response body.
  '307':
    $ref: 'TS29122_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29122_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

delete:
  summary: Request the deletion of an existing Individual Media Streaming Event Exposure
  Subscription resource.
  tags:
    - Individual Media Streaming Event Exposure Subscription (Document)
  operationId: DeleteIndivMSEventExposureSubsc
  responses:
    '204':
      description: >
        No Content. The Individual Media Streaming Event Exposure Subscription resource is
        successfully deleted.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

#
# STRUCTURED DATA TYPES
#
# SIMPLE DATA TYPES
#

```


ENUMERATIONS
#

Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2018-03	CT3#95					TS Skeleton	0.0.0
2018-03	CT3#95					Inclusion of C3-181332 and TS skeleton of Network Exposure Function Northbound APIs in C3-181362.	0.1.0
2018-04	CT3#96					Inclusion of C3-182407, C3-182408, C3-182504, C3-182418, C3-182505, C3-182443, C3-182421, C3-182422, C3-182501 and editorial changes from Rapporteur.	0.2.0
2018-05	CT3#97					Inclusion of C3-183187, C3-183773, C3-183774, C3-183553, C3-183826, C3-183329, C3-183776, C3-183827, C3-183778, C3-183605 and editorial changes from Rapporteur.	0.3.0
2018-06	CT#80					TS sent to plenary for approval	1.0.0
2018-06	CT#80					TS approved by plenary	15.0.0
2018-09	CT#81	CP-182015	0001	1	F	DNAI change notification type	15.1.0
2018-09	CT#81	CP-182015	0002	-	F	Corrections on NEF Northbound interface	15.1.0
2018-09	CT#81	CP-182015	0003	1	F	TrafficInfluence API OpenAPI schema	15.1.0
2018-09	CT#81	CP-182015	0004	4	F	AF influence traffic routing cleanup	15.1.0
2018-09	CT#81	CP-182031	0005	1	F	Definition of Changing the Chargeable Party procedures and API	15.1.0
2018-09	CT#81	CP-182031	0006	1	F	Definition of setting up an AS session with required QoS procedure and API	15.1.0
2018-09	CT#81	CP-182015	0007	2	F	Resource structure update	15.1.0
2018-09	CT#81	CP-182015	0008	-	F	Procedures for monitoring – Reference	15.1.0
2018-09	CT#81	CP-182015	0009	-	F	Ethernet packet filter for AF traffic influence API	15.1.0
2018-09	CT#81	CP-182015	0010	3	F	Removable attribute definition for AF traffic influence	15.1.0
2018-09	CT#81	CP-182015	0011	-	F	Supported feature for AF traffic influence	15.1.0
2018-09	CT#81	CP-182015	0012	-	F	Version numbering change	15.1.0
2018-09	CT#81	CP-182015	0013	-	F	Removal of externaldocs field	15.1.0
2018-09	CT#81	CP-182035	0014	1	F	PFD Management Service Operation	15.1.0
2018-12	CT#82	CP-183205	0015	2	F	ExternalDocs field	15.2.0
2018-12	CT#82	CP-183205	0016	3	F	Support of 5G location requirement	15.2.0
2018-12	CT#82	CP-183205	0017	3	F	Error status codes for HTTP responses	15.2.0
2018-12	CT#82	CP-183205	0019	-	F	Default value for apiRoot	15.2.0
2018-12	CT#82	CP-183205	0021	4	F	Correct traffic route and Ethernet flow data type	15.2.0
2018-12	CT#82	CP-183205	0022	1	F	Event correction for AF influence traffic routing	15.2.0
2018-12	CT#82	CP-183205	0023	2	F	Correction to the AF influence on traffic steering control	15.2.0
2018-12	CT#82	CP-183205	0024	1	F	Supporting Ethernet UE in Chargeable Party and AF session with QoS	15.2.0
2018-12	CT#82	CP-183205	0025	1	F	Add AF application ID for traffic influence	15.2.0
2018-12	CT#82	CP-183205	0026	1	F	Add BSF interaction for Chargeable Party and Required QoS	15.2.0
2018-12	CT#82	CP-183109	0027	2	F	Security adaptation for Nnef northbound APIs with CAPIF	15.2.0
2018-12	CT#82	CP-183205	0028	2	F	Security field	15.2.0
2018-12	CT#82	CP-183205	0029	1	F	Corrections on subscribed event	15.2.0
2018-12	CT#82	CP-183205	0030	1	F	Status code update for TrafficInfluence API	15.2.0
2018-12	CT#82	CP-183205	0031	3	F	UE information during notification	15.2.0
2018-12	CT#82	CP-183205	0032	-	F	Location header	15.2.0
2018-12	CT#82	CP-183205	0033	1	F	API Version Update	15.2.0
2018-12	CT#82	CP-183205	0034	1	F	Support of 5G SUPI-PEI association	15.2.0
2018-12	CT#82	CP-183205	0035	1	F	Default value for appReloInd and minIem for tempValidities	15.2.0
2019-03	CT#83	CP-190116	0037	2	F	Event notification	15.3.0
2019-03	CT#83	CP-190116	0038	1	F	Correction on MacAddr48 and RouteToLocation data type reference in the OpenAPI file	15.3.0
2019-03	CT#83	CP-190116	0040	1	F	Correction on 5G feature	15.3.0
2019-03	CT#83	CP-190116	0041	-	F	Open API version number update	15.3.0
2019-06	CT#84	CP-191080	0042	4	F	Resource structure and AF Identifier	15.4.0
2019-06	CT#84	CP-191080	0048	2	F	UDM interaction for AF influence traffic	15.4.0
2019-06	CT#84	CP-191080	0049	2	F	Correct condition for DNAI in UP path change	15.4.0
2019-06	CT#84	CP-191080	0053	1	F	Precedence of OpenAPI file	15.4.0
2019-06	CT#84	CP-191080	0059	1	F	Copyright Note in YAML file	15.4.0
2019-06	CT#84	CP-191080	0060	2	F	API version Update	15.4.0
2019-06	CT#84	CP-191070	0043	2	F	Nnef_MSISDN-less_MO_SMS service	16.0.0
2019-06	CT#84	CP-191070	0044	2	B	Application function notification of downlink data delivery status	16.0.0
2019-06	CT#84	CP-191070	0045	2	B	Availability after DDN failure notification for multiple Afs	16.0.0
2019-06	CT#84	CP-191090	0047	1	F	Support of external group Id	16.0.0
2019-06	CT#84	CP-191070	0050	2	B	Network parameter provisioning support	16.0.0
2019-06	CT#84	CP-191070	0051	3	F	NIDD configuration and delivery in 5G	16.0.0
2019-06	CT#84	CP-191229	0054	5	B	AF acknowledgement to be expected	16.0.0
2019-06	CT#84	CP-191071	0055	2	B	UE IP address preservation indication	16.0.0
2019-06	CT#84	CP-191104	0056	1	B	PFD management notification	16.0.0
2019-06	CT#84	CP-191100	0057	1	B	NEF stored exposure data	16.0.0
2019-06	CT#84	CP-191105	0058	1	B	BDT Warning Notification Support	16.0.0
2019-06	CT#84	CP-191101	0061	1	F	API version update	16.0.0

2019-09	CT#85	CP-192137	0063	1	F	Resolving EN in NIDD	16.1.0
2019-09	CT#85	CP-192156	0064	1	B	Support a set of MAC addresses in traffic filter	16.1.0
2019-09	CT#85	CP-192165	0066	1	B	Support parameter provisioning in RACS	16.1.0
2019-09	CT#85	CP-192157	0067	2	B	Accurate UE moving trajectory definition	16.1.0
2019-09	CT#85	CP-192157	0069	2	B	Procedures for Nnef_AnalyticsExposure Service	16.1.0
2019-09	CT#85	CP-192157	0070	2	B	API definition for Nnef_AnalyticsExposure Service	16.1.0
2019-09	CT#85	CP-192170	0071	1	B	Procedures for 5G LAN type sevice over northbound interface	16.1.0
2019-09	CT#85	CP-192170	0072	2	B	API definition for 5G LAN type sevice over northbound interface	16.1.0
2019-09	CT#85	CP-192169	0073	3	B	PFD management partial failure	16.1.0
2019-09	CT#85	CP-192157	0074	1	B	Cancel the BDT warning notification	16.1.0
2019-09	CT#85	CP-192219	0075	2	B	Notification of downlink data delivery status	16.1.0
2019-09	CT#85	CP-192179	0076	2	B	Applying BDT policy	16.1.0
2019-09	CT#85	CP-192152	0077	2	B	API definition for Nnef_IPTVconfiguration service	16.1.0
2019-09	CT#85	CP-192137	0079	-	B	Nnef_ECRestriction service	16.1.0
2019-09	CT#85	CP-192137	0080	-	B	Differences between EPC and 5GC	16.1.0
2019-09	CT#85	CP-192158	0081	1	F	Service consumer description Corrections	16.1.0
2019-09	CT#85	CP-192138	0082	2	B	AF acknowledgement of UP path event notification	16.1.0
2019-09	CT#85	CP-192138	0083	-	B	Successful AF acknowledgement without N6 traffic routing information	16.1.0
2019-09	CT#85	CP-192173	0084	-	F	OpenAPI version update TS 29.522 R-16	16.1.0
2019-09	CT#85	CP-192251	0085	1	B	Procedures for Nnef_IPTVconfiguration service	16.1.0
2019-12	CT#86	CP-193179	0086	1	B	Nnef_APISupportCapability Service	16.2.0
2019-12	CT#86	CP-193181	0087	-	B	OpenAPI file update to support AF acknowledgement	16.2.0
2019-12	CT#86	CP-193179	0088	1	B	Scheduled communication type	16.2.0
2019-12	CT#86	CP-193181	0089	1	B	Open issue for AddrPreservation feature	16.2.0
2019-12	CT#86	CP-193222	0090	1	B	Partial update for 5GLANParameterProvision API	16.2.0
2019-12	CT#86	CP-193222	0091	2	B	OpenAPI file for 5GLANParameterProvision API	16.2.0
2019-12	CT#86	CP-193191	0092	3	F	Clarify multicast access control	16.2.0
2019-12	CT#86	CP-193222	0093	1	F	Clarify the procedure for 5GLAN parameter provisioning	16.2.0
2019-12	CT#86	CP-193223	0094	-	F	Correct resource URI for xBDT	16.2.0
2019-12	CT#86	CP-193220	0096	4	B	PFD partial failure notification	16.2.0
2019-12	CT#86	CP-193223	0097	1	F	Correction to HTTP methods used to update BDT policy	16.2.0
2019-12	CT#86	CP-193191	0099	1	B	Partial update of IPTVConfiguration API	16.2.0
2019-12	CT#86	CP-193191	0100	2	B	OpenAPI file of IPTVConfiguration API	16.2.0
2019-12	CT#86	CP-193198	0101	3	B	AnalyticsEventNotif and AnalyticsExposureSubsc Data Types	16.2.0
2019-12	CT#86	CP-193198	0102	-	B	Open issue for AnalyticsEvent data type	16.2.0
2019-12	CT#86	CP-193198	0103	1	B	Partial update of Nnef_AnalyticsExposure API	16.2.0
2019-12	CT#86	CP-193198	0104	2	B	Nnef_AnalyticsExposure_fetch service operation	16.2.0
2019-12	CT#86	CP-193181	0105	-	F	Correct the condition for AF relocation acknowledgement	16.2.0
2019-12	CT#86	CP-193199	0106	-	F	UI structure for N33 APIs	16.2.0
2019-12	CT#86	CP-193198	0107	-	B	OpenAPI file for AnalyticsExposure API	16.2.0
2019-12	CT#86	CP-193222	0108	1	D	Corrections on 5GLANParameterProvision API	16.2.0
2019-12	CT#86	CP-193181	0109	-	F	Definition of AfResultInfo in OpenAPI	16.2.0
2019-12	CT#86	CP-193212	0110	1	F	Update of API version and TS version in OpenAPI file	16.2.0
2019-12	CT#86	CP-193188	0112	1	A	make the storage of traffic influence request in the UDR mandatory	16.2.0
2019-12	CT#86	CP-193223	0113	1	F	missing required in ApplyingBdtPolicy API file	16.2.0
2019-12	CT#86	CP-193188	0115	-	A	Correct cardinality in traffic influence	16.2.0
2019-12	CT#86	CP-193198	0116	1	F	openAPI correction for ExNotification	16.2.0
2020-03	CT#87-e	CP-200207	0118	-	B	DNN Clarification	16.3.0
2020-03	CT#87-e	CP-200198	0119	1	B	Update of the Availability after DDN Failure event	16.3.0
2020-03	CT#87-e	CP-200198	0120	1	B	Update of the DDD status event	16.3.0
2020-03	CT#87-e	CP-200212	0122	1	B	Procedure of Nnef_ServiceParameter service	16.3.0
2020-03	CT#87-e	CP-200212	0123	1	B	Resources and data types of Nnef_ServiceParameter service	16.3.0
2020-03	CT#87-e	CP-200266	0124	3	B	OpenAPI file of Nnef_ServiceParameter service	16.3.0
2020-03	CT#87-e	CP-200202	0125	1	B	QoS Monitoring Report	16.3.0
2020-03	CT#87-e	CP-200218	0126	1	B	Indication of traffic correlation	16.3.0
2020-03	CT#87-e	CP-200203	0127	1	B	Clarification of IPTV configuration	16.3.0
2020-03	CT#87-e	CP-200198	0128	-	F	Correct TS number for NEF southbound NIDD service	16.3.0
2020-03	CT#87-e	CP-200198	0129	-	B	Support PDU session status	16.3.0
2020-03	CT#87-e	CP-200137	0130	2	F	Correct UE mobility and communication	16.3.0
2020-03	CT#87-e	CP-200208	0131	1	B	Support network performance analytics	16.3.0
2020-03	CT#87-e	CP-200208	0132	1	B	Support BDT policy candidates in notification	16.3.0
2020-03	CT#87-e	CP-200212	0133	1	B	Add alternative QoS requirements	16.3.0
2020-03	CT#87-e	CP-200142	0134	2	B	Support QoS sustainability analytics	16.3.0
2020-03	CT#87-e	CP-200218	0135	-	F	Definition of 5GLanParametersProvision	16.3.0
2020-03	CT#87-e	CP-200203	0136	-	F	Definition of IptvConfigData	16.3.0
2020-03	CT#87-e	CP-200219	0137	-	F	Usage of the "bdtReflid" property	16.3.0
2020-03	CT#87-e	CP-200215	0138	-	F	Miscellaneous errors	16.3.0
2020-03	CT#87-e	CP-200199	0140	3	B	UE Location Privacy Setting in NEF	16.3.0
2020-03	CT#87-e	CP-200237	0142	2	B	AnalyticsExposure API, Analytics Event Filter associated with all events	16.3.0

2020-03	CT#87-e	CP-200208	0143	1	B	AnalyticsExposure API, support of abnormal behaviour	16.3.0
2020-03	CT#87-e	CP-200208	0144	1	B	AnalyticsExposure API, support of data congestion	16.3.0
2020-03	CT#87-e	CP-200216	0145	-	F	29.522 Rel-16 Update of OpenAPI version and TS version in externalDocs field	16.3.0
2020-03	CT#87-e	CP-200259	0146	-	F	LpiParameterProvision API update for LPI parameters provisioning	16.3.0
2020-06	CT#88-e	CP-201243	0148	1	F	Missing mapping in the overview	16.4.0
2020-06	CT#88-e	CP-201238	0149	2	F	Wrong datatypes Datatime and Plmn	16.4.0
2020-06	CT#88-e	CP-201234	0150	-	F	Wrong datatype referred in analytics exposure procedure	16.4.0
2020-06	CT#88-e	CP-201228	0151	1	B	Procedure of ACS Information Configuration	16.4.0
2020-06	CT#88-e	CP-201228	0152	1	B	Resources and data types of Nnef_ACSPParameterProvision service	16.4.0
2020-06	CT#88-e	CP-201339	0153	4	B	OpenAPI file of Nnef_ACSPParameterProvision service	16.4.0
2020-06	CT#88-e	CP-201235	0159	1	F	Loss of connectivity reason	16.4.0
2020-06	CT#88-e	CP-201235	0161	1	F	Any UE clarification	16.4.0
2020-06	CT#88-e	CP-201252	0162	1	F	Correction to 5GLANParameterProvision API	16.4.0
2020-06	CT#88-e	CP-201228	0163	1	F	Correction to IPTVConfiguration API	16.4.0
2020-06	CT#88-e	CP-201253	0164	1	F	Correction to ApplyingBdtPolicy API	16.4.0
2020-06	CT#88-e	CP-201252	0165	1	F	Open issue for 5GLanParametersProvisionPatch	16.4.0
2020-06	CT#88-e	CP-201195	0167	6	B	Supporting the Location Services in NEF in TS 29.522	16.4.0
2020-06	CT#88-e	CP-201235	0169	1	A	Periodic reporting by Nnef	16.4.0
2020-06	CT#88-e	CP-201252	0170	3	F	Clarify nullable attributes used in PATCH	16.4.0
2020-06	CT#88-e	CP-201244	0171	1	F	Storage of YAML files in ETSI Forge	16.4.0
2020-06	CT#88-e	CP-201178	0172	2	F	Confidence of analytics results for Nnef_AnalyticsExposure service	16.4.0
2020-06	CT#88-e	CP-201238	0173	-	B	Complete ServiceParameter API	16.4.0
2020-06	CT#88-e	CP-201276	0174	1	F	Traffic descriptor for xBDT	16.4.0
2020-06	CT#88-e	CP-201213	0175	1	F	Corrections related to URLLC	16.4.0
2020-06	CT#88-e	CP-201228	0177	-	F	Clarify unmodifiable attribute in PUT	16.4.0
2020-06	CT#88-e	CP-201234	0178	1	F	Optional target UE	16.4.0
2020-06	CT#88-e	CP-201246	0179	1	F	Move 5G specific procedure to TS 29.522	16.4.0
2020-06	CT#88-e	CP-201210	0180	1	F	Interaction with UDM for Enhanced Coverage Restriction Control	16.4.0
2020-06	CT#88-e	CP-201210	0181	1	B	Support of Enhanced Coverage Mode control	16.4.0
2020-06	CT#88-e	CP-201234	0182	-	F	Support of immediate reporting for Nnef_AnalyticsExposure service	16.4.0
2020-06	CT#88-e	CP-201246	0183	1	F	Corrections to apiVersion	16.4.0
2020-06	CT#88-e	CP-201246	0184	1	F	Corrections to error status code	16.4.0
2020-06	CT#88-e	CP-201274	0185	1	B	AF provides AAA server address	16.4.0
2020-06	CT#88-e	CP-201246	0186	1	F	Updates to IP address	16.4.0
2020-06	CT#88-e	CP-201234	0187	2	F	Update to reporting information	16.4.0
2020-06	CT#88-e	CP-201234	0188	1	F	Ratio of analytics results for Nnef_AnalyticsExposure service	16.4.0
2020-06	CT#88-e	CP-201234	0189	-	F	Supported features definition for Nnef_AnalyticsExposure service	16.4.0
2020-06	CT#88-e	CP-201234	0190	1	F	Corrections on target UE information for Nnef_AnalyticsExposure service	16.4.0
2020-06	CT#88-e	CP-201246	0191	1	F	Corrections on tags field for NEF Northbound APIs	16.4.0
2020-06	CT#88-e	CP-201234	0192	1	F	Support of network performance for Nnef_AnalyticsExposure service	16.4.0
2020-06	CT#88-e	CP-201234	0193	1	F	Data type used in fetch the analytics	16.4.0
2020-06	CT#88-e	CP-201235	0194	1	F	Supported headers, Resource Data type and Operation Name	16.4.0
2020-06	CT#88-e	CP-201255	0195	-	F	Update of OpenAPI version and TS version in externalDocs field	16.4.0
2020-06	CT#88-e	CP-201336	0196	1	F	Remove the Abnormal_Behaviour applicability for ueMobilityInfos in AnalyticsData	16.4.0
2020-09	CT#89-e	CP-202077	0199	-	F	Remove 5G procedures from TS 29.122	16.5.0
2020-09	CT#89-e	CP-202048	0200	-	F	Corrections on NiddConfigurationTrigger API	16.5.0
2020-09	CT#89-e	CP-202048	0201	-	F	Support PDU session status	16.5.0
2020-09	CT#89-e	CP-202059	0202	-	F	Missed Location header table	16.5.0
2020-09	CT#89-e	CP-202066	0203	-	F	Zero confidence	16.5.0
2020-09	CT#89-e	CP-202059	0206	-	F	URI of ACSPParameterProvision API	16.5.0
2020-09	CT#89-e	CP-202069	0207	-	F	Subscription creation	16.5.0
2020-09	CT#89-e	CP-202069	0208	1	F	Resource correction	16.5.0
2020-09	CT#89-e	CP-202066	0209	-	F	Validity period for analytics information	16.5.0
2020-09	CT#89-e	CP-202081	0210	-	F	5G LAN Parameter Provisioning	16.5.0
2020-09	CT#89-e	CP-202066	0211	-	F	Omitted event reporting information	16.5.0
2020-09	CT#89-e	CP-202082	0212	1	F	Reading all subscriptions in ApplyingBdtPolicy API	16.5.0
2020-09	CT#89-e	CP-202082	0213	1	F	Resource URI corrections	16.5.0
2020-09	CT#89-e	CP-202066	0214	1	F	Ratio and confidence for UE mobility	16.5.0
2020-09	CT#89-e	CP-202066	0215	-	F	Extra reporting requirement	16.5.0
2020-09	CT#89-e	CP-202066	0216	-	F	Reading all subscriptions in AnalyticsExposure API	16.5.0
2020-09	CT#89-e	CP-202066	0217	-	F	Applicabilities of snssai, dnn and locArea	16.5.0
2020-09	CT#89-e	CP-202084	0218	-	F	29.522 Rel-16 Update of OpenAPI version and TS version in externalDocs field	16.5.0
2020-12	CT#90-e	CP-203139	0219	1	F	TS 29.522 Essential Corrections and alignments	16.6.0
2020-12	CT#90-e	CP-203109	0220	1	F	Essential corrections and alignments	16.6.0
2020-12	CT#90-e	CP-203132	0221	-	F	Correction to Alternative QoS Parameter	16.6.0
2020-12	CT#90-e	CP-203139	0222	-	F	Storage of YAML files in 3GPP Forge	16.6.0

2020-12	CT#90-e	CP-203111	0223	-	F	array QoSMonitoringReport	16.6.0
2020-12	CT#90-e	CP-203139	0224	1	F	Callback URI correction	16.6.0
2020-12	CT#90-e	CP-203108	0227	-	F	Difference between 4G and 5G for ECRControl API	16.6.0
2020-12	CT#90-e	CP-203108	0228	-	F	PDU session status	16.6.0
2020-12	CT#90-e	CP-203118	0231	1	A	Solve IP address overlapping for AF traffic influence	16.6.0
2020-12	CT#90-e	CP-203129	0232	1	F	Corrections to Subscription Request in AnalyticsExposure API	16.6.0
2020-12	CT#90-e	CP-203129	0233	1	F	Correction to appld exposed in AnalyticsExposure API	16.6.0
2020-12	CT#90-e	CP-203152	0236	-	F	Update of OpenAPI version and TS version in externalDocs field	16.6.0
2020-12	CT#90-e	CP-203124	0225	1	B	Procedures of Nnef_AKMA service	17.0.0
2020-12	CT#90-e	CP-203124	0226	1	B	API definition of Nnef_AKMA service	17.0.0
2020-12	CT#90-e	CP-203130	0234	1	F	Corrections to location area usage	17.0.0
2021-03	CT#91-e	CP-210202	0238	-	A	Correct presence condition in ACS provisioning procedure	17.1.0
2021-03	CT#91-e	CP-210210	0240	1	A	Correct AlternativeQoS_5G description	17.1.0
2021-03	CT#91-e	CP-210210	0242	1	A	Correct service parameter provisioning procedure	17.1.0
2021-03	CT#91-e	CP-210210	0244	1	A	Correction to alternative QoS paramter report	17.1.0
2021-03	CT#91-e	CP-210210	0246	2	A	Disable UE notifications at changes related to Alternative QoS Profiles	17.1.0
2021-03	CT#91-e	CP-210192	0248	1	A	QoS monitoring report during the PDU session termination	17.1.0
2021-03	CT#91-e	CP-210192	0250	1	A	Change of notification URI	17.1.0
2021-03	CT#91-e	CP-210203	0251	2	B	Support Redirection for AKMA API	17.1.0
2021-03	CT#91-e	CP-210203	0252	-	B	Missed 204 No Content for AKMA API	17.1.0
2021-03	CT#91-e	CP-210207	0254	1	A	Last known location report	17.1.0
2021-03	CT#91-e	CP-210226	0255	1	F	API design style	17.1.0
2021-03	CT#91-e	CP-210207	0257	-	A	Default value of accuary	17.1.0
2021-03	CT#91-e	CP-210208	0259	3	A	Support redirection for TrafficInfluence API	17.1.0
2021-03	CT#91-e	CP-210207	0261	-	A	Monitoring expire time	17.1.0
2021-03	CT#91-e	CP-210218	0262	-	F	Adding "description" field for map data types	17.1.0
2021-03	CT#91-e	CP-210219	0263	1	F	OpenAPI reference	17.1.0
2021-03	CT#91-e	CP-210237	0265	1	A	Correction to mtcProviderId in 5GLANParameterProvision API	17.1.0
2021-03	CT#91-e	CP-210190	0267	1	A	Correction to mtcProviderId in LpiParameterProvision API	17.1.0
2021-03	CT#91-e	CP-210203	0268	1	F	Correction to AfId in AKMA API	17.1.0
2021-03	CT#91-e	CP-210203	0269	1	F	Correction to AKId in AKMA API	17.1.0
2021-03	CT#91-e	CP-210227	0275	1	F	Correction to Traffic Influence procedure	17.1.0
2021-03	CT#91-e	CP-210206	0277	1	A	Failure events for AnalyticsExposure API	17.1.0
2021-03	CT#91-e	CP-210227	0278	1	B	Update procedure of TrafficInfluence API	17.1.0
2021-03	CT#91-e	CP-210208	0280	1	A	Support redirection for 5GLANParameterProvision API	17.1.0
2021-03	CT#91-e	CP-210208	0282	1	A	Support redirection for ACSPParameterProvision API	17.1.0
2021-03	CT#91-e	CP-210209	0284	1	A	Support redirection for AnalyticsExposure API	17.1.0
2021-03	CT#91-e	CP-210209	0286	1	A	Support redirection for ApplyingBdtPolicy API	17.1.0
2021-03	CT#91-e	CP-210209	0288	1	A	Support redirection for IPTVConfiguration API	17.1.0
2021-03	CT#91-e	CP-210209	0290	1	A	Support redirection for LpiParameterProvision API	17.1.0
2021-03	CT#91-e	CP-210209	0292	1	A	Support redirection for MoLcsNotify API	17.1.0
2021-03	CT#91-e	CP-210209	0294	1	A	Support redirection for NiddConfigurationTrigger API	17.1.0
2021-03	CT#91-e	CP-210209	0296	1	A	Support redirection for ServiceParameter API	17.1.0
2021-03	CT#91-e	CP-210199	0299	-	A	Correction on N5 events for AsSessionWithQoS API	17.1.0
2021-03	CT#91-e	CP-210202	0302	2	A	Correction to mtcProviderId in IPTVConfiguration API	17.1.0
2021-03	CT#91-e	CP-210210	0304	1	A	Correction to mtcProviderId in ServiceParameter API	17.1.0
2021-03	CT#91-e	CP-210202	0306	2	A	Correction to mtcProviderId in ACSPParameterProvision API	17.1.0
2021-03	CT#91-e	CP-210240	0308	-	F	Update of OpenAPI version and TS version in externalDocs field	17.1.0
2021-06	CT#92-e	CP-211282	0270	5	B	Update DNN and S-NSSAI in ChargeableParty procedure	17.2.0
2021-06	CT#92-e	CP-211282	0271	5	B	Update DNN and S-NSSAI in AsSessionWithQoS API procedure	17.2.0
2021-06	CT#92-e	CP-211256	0310	2	D	Correction of AaaUsage	17.2.0
2021-06	CT#92-e	CP-211245	0312	2	D	Correction of AccessRightStatus	17.2.0
2021-06	CT#92-e	CP-211238	0314	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the TrafficInfluence API	17.2.0
2021-06	CT#92-e	CP-211238	0315	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the NiddConfigurationTrigger API	17.2.0
2021-06	CT#92-e	CP-211238	0316	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the AnalyticsExposure API	17.2.0
2021-06	CT#92-e	CP-211239	0317	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the 5GLANParameterProvision API	17.2.0
2021-06	CT#92-e	CP-211239	0318	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the ApplyingBdtPolicy API	17.2.0
2021-06	CT#92-e	CP-211239	0319	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the IPTVConfiguration API	17.2.0
2021-06	CT#92-e	CP-211239	0320	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the LpiParameterProvision API	17.2.0
2021-06	CT#92-e	CP-211239	0321	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the ServiceParameter API	17.2.0
2021-06	CT#92-e	CP-211239	0322	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the ACSPParameterProvision API	17.2.0

2021-06	CT#92-e	CP-211239	0323	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the MoLcsNotify API	17.2.0
2021-06	CT#92-e	CP-211239	0324	1	F	Adding some missing description fields to data type definitions in OpenAPI specification files of the AKMA API	17.2.0
2021-06	CT#92-e	CP-211201	0325	3	B	5G ProSe related updates to the Nnef_ServiceParameter Service	17.2.0
2021-06	CT#92-e	CP-211274	0326	3	B	Support time Sensitive Communication	17.2.0
2021-06	CT#92-e	CP-211225	0327	3	B	The procedure of time synchronization exposure	17.2.0
2021-06	CT#92-e	CP-211225	0328	2	B	The resource and methods of time synchronization exposure	17.2.0
2021-06	CT#92-e	CP-211225	0329	2	B	The OpenAPI file of time synchronization exposure	17.2.0
2021-06	CT#92-e	CP-211214	0330	-	F	Correction of TS title for 29.535 in references	17.2.0
2021-06	CT#92-e	CP-211218	0331	-	B	Procedures for ECS address provisioning	17.2.0
2021-06	CT#92-e	CP-211218	0332	-	B	API definition for ECS address provisioning	17.2.0
2021-06	CT#92-e	CP-211218	0333	1	B	Support of User Plane Latency requirement	17.2.0
2021-06	CT#92-e	CP-211229	0334	1	F	Correction to UserPlaneEvent applicability in AsSessionWithQoS API	17.2.0
2021-06	CT#92-e	CP-211199	0336	1	A	Correction to LDR geographic area	17.2.0
2021-06	CT#92-e	CP-211207	0339	-	A	Location accuracy	17.2.0
2021-06	CT#92-e	CP-211220	0341	-	A	Adding description for partial failure operation of AnalyticsExposure API	17.2.0
2021-06	CT#92-e	CP-211267	0342	1	B	New Network slice status reporting events for the MonitoringEvent API	17.2.0
2021-06	CT#92-e	CP-211224	0344	-	A	Wrong attribute name in the OpenAPI file	17.2.0
2021-06	CT#92-e	CP-211224	0346	-	A	Data type in 200 OK response to PATCH	17.2.0
2021-06	CT#92-e	CP-211218	0347	1	B	Support of Network Exposure to EAS via Local NEF	17.2.0
2021-06	CT#92-e	CP-211240	0348	-	F	Update of notification destination for TrafficInfluence API	17.2.0
2021-06	CT#92-e	CP-211220	0350	1	A	Consistency for websocket in AnalyticsExposure	17.2.0
2021-06	CT#92-e	CP-211257	0351	-	B	Support AM Influence service	17.2.0
2021-06	CT#92-e	CP-211257	0352	-	B	Support AM Policy Authorization service	17.2.0
2021-06	CT#92-e	CP-211188	0353	2	B	Resource, methods and data model for AM Policy Authorization service	17.2.0
2021-06	CT#92-e	CP-211172	0354	2	B	API definition of AM PolicyAuthorization service	17.2.0
2021-06	CT#92-e	CP-211248	0355	-	B	eCAPIF support	17.2.0
2021-06	CT#92-e	CP-211251	0356	1	F	Non-selected BDT policy	17.2.0
2021-06	CT#92-e	CP-211241	0358	-	F	Correction of the cardinality of tempValidities	17.2.0
2021-06	CT#92-e	CP-211190	0359	2	B	Updates of ServiceParameter Service to support AF influence on URSP	17.2.0
2021-06	CT#92-e	CP-211189	0361	1	B	Procedures for AM Policy Authorization service	17.2.0
2021-06	CT#92-e	CP-211265	0363	-	F	Update of OpenAPI version and TS version in externalDocs field	17.2.0
2021-09	CT#93-e	CP-212225	0364	1	F	AMPolicyAuthorization API corrections for the Subscribe operation	17.3.0
2021-09	CT#93-e	CP-212198	0365	2	B	Adding uplink buffering indication for Application Relocation	17.3.0
2021-09	CT#93-e	CP-212211	0367	1	B	TSCTS support for Time Sensitive Communication	17.3.0
2021-09	CT#93-e	CP-212211	0369	1	B	Update of the procedure of time synchronization exposure service	17.3.0
2021-09	CT#93-e	CP-212211	0370	1	B	Update of the resource and methods of time synchronization exposure	17.3.0
2021-09	CT#93-e	CP-212211	0371	1	B	Update of the OpenAPI file of time synchronization exposure service	17.3.0
2021-09	CT#93-e	CP-212225	0372	1	F	AMPolicyAuthorization API: correcting resources	17.3.0
2021-09	CT#93-e	CP-212225	0373	-	F	Reference to TS 29.534	17.3.0
2021-09	CT#93-e	CP-212211	0374	1	F	TimeSyncExposure API: alignment with naming convention	17.3.0
2021-09	CT#93-e	CP-212198	0375	1	F	ECS Address Provision Configurations resource definition	17.3.0
2021-09	CT#93-e	CP-212225	0376	1	B	Procedures for AF triggered Access and Mobility Influence	17.3.0
2021-09	CT#93-e	CP-212225	0377	1	B	API definition of Nnef_AMInfluence service	17.3.0
2021-09	CT#93-e	CP-212224	0379	-	F	Fix Appld feature description	17.3.0
2021-09	CT#93-e	CP-212198	0381	1	B	Spatial Validity Condition and Target	17.3.0
2021-09	CT#93-e	CP-212211	0384	1	F	Corrections to Time Synchronization Exposure	17.3.0
2021-09	CT#93-e	CP-212202	0386	-	A	Corrections to analytics exposure	17.3.0
2021-09	CT#93-e	CP-212229	0388	-	A	correction of resource name for ApplyingBdtPolicy API	17.3.0
2021-09	CT#93-e	CP-212228	0390	-	A	correction of attribute name of applds	17.3.0
2021-09	CT#93-e	CP-212190	0393	1	A	Corrections to TrafficInfluence	17.3.0
2021-09	CT#93-e	CP-212214	0394	-	F	Resource URI correction on NEF northbound APIs	17.3.0
2021-09	CT#93-e	CP-212225	0397	-	F	Change the error codes definitions references	17.3.0
2021-09	CT#93-e	CP-212188	0401	-	B	Removal of some 5G ProSe related Ens	17.3.0
2021-09	CT#93-e	CP-212224	0402	-	B	Update procedure for DNN and S-NSSAI in MonitoringEvent API	17.3.0
2021-09	CT#93-e	CP-212226	0403	1	B	Updates to support GEM partial cancellation	17.3.0
2021-09	CT#93-e	CP-212187	0404	1	B	Support for Multiple QoS Class in deferred location request	17.3.0
2021-09	CT#93-e	CP-212186	0406	1	A	Updates to LCS client type	17.3.0
2021-09	CT#93-e	CP-212223	0407	-	F	Update of OpenAPI version and TS version in externalDocs field	17.3.0
2021-12	CT#94-e	CP-213234	0411	2	B	Update of the time synchronization exposure subscription	17.4.0
2021-12	CT#94-e	CP-213234	0412	2	B	Update of the time synchronization exposure capability notification	17.4.0
2021-12	CT#94-e	CP-213234	0413	2	B	Update of the procedure of time synchronization exposure service	17.4.0
2021-12	CT#94-e	CP-213200	0414	2	B	Update Procedures for AF triggered AM Policy Authorization	17.4.0

2021-12	CT#94-e	CP-213200	0415	2	B	Update AM Policy Authorization service description and API definition	17.4.0
2021-12	CT#94-e	CP-213258	0416	2	B	Update OpenAPI definition of AM Policy Authorization service	17.4.0
2021-12	CT#94-e	CP-213194	0417	1	B	Update procedures for AF triggered AM Influence	17.4.0
2021-12	CT#94-e	CP-213200	0418	2	B	Update AM Influence Data Model	17.4.0
2021-12	CT#94-e	CP-213222	0420	1	B	Support AF subscribed notifications in Nnef_ServiceParameter_Create operation	17.4.0
2021-12	CT#94-e	CP-213222	0421	1	B	Support Nnef_ServiceParameter_Notify operation	17.4.0
2021-12	CT#94-e	CP-213222	0422	1	B	Procedures on AF subscribed notification of service parameter invocation outcome	17.4.0
2021-12	CT#94-e	CP-213222	0423	1	B	Procedures on Service Specific Authorization Update Notification	17.4.0
2021-12	CT#94-e	CP-213230	0424	1	F	Correction to NSAC procedure	17.4.0
2021-12	CT#94-e	CP-213234	0425	1	B	Descriptions about alternative QoS parameters in AsSessionWithQoS	17.4.0
2021-12	CT#94-e	CP-213257	0426	3	B	The OpenAPI file for AMInfluence service	17.4.0
2021-12	CT#94-e	CP-213212	0428	1	F	Resolve editor note for Multiple QoS Class	17.4.0
2021-12	CT#94-e	CP-213230	0429	1	F	Resolving the subscription to NSAC events related ENs	17.4.0
2021-12	CT#94-e	CP-213230	0430	-	F	Resolving the reporting type related ENs for NSAC event subscriptions	17.4.0
2021-12	CT#94-e	CP-213213	0431	1	B	Updates to the 5G ProSe service parameters	17.4.0
2021-12	CT#94-e	CP-213235	0432	-	F	Correcting the Resource URI structure figures	17.4.0
2021-12	CT#94-e	CP-213235	0433	-	F	Correcting some wrong tables numbers	17.4.0
2021-12	CT#94-e	CP-213235	0434	1	F	Removing unnecessary tables	17.4.0
2021-12	CT#94-e	CP-213234	0435	-	F	Adding the missing Notification_websocket and Notification_test_event features to the TimeSyncExposure API	17.4.0
2021-12	CT#94-e	CP-213217	0436	2	B	New Nnef_MBSTMG I service definition - API part	17.4.0
2021-12	CT#94-e	CP-213217	0437	2	B	New Nnef_MBSTMG I service definition - OpenAPI part	17.4.0
2021-12	CT#94-e	CP-213217	0438	1	B	New Nnef_MBSTMG I service definition – Procedures part	17.4.0
2021-12	CT#94-e	CP-213220	0439	-	B	Alignment with SA3 supported TLS profiles	17.4.0
2021-12	CT#94-e	CP-213223	0440	1	B	Adding EAS IP replacement information in Traffic Influence	17.4.0
2021-12	CT#94-e	CP-213236	0441	1	F	Adding the AnalyticsExposure API specific data types table	17.4.0
2021-12	CT#94-e	CP-213236	0442	1	F	Adding the ServiceParameter API specific data types table	17.4.0
2021-12	CT#94-e	CP-213236	0443	1	F	Adding the ApplyingBdtPolicy API specific data types table	17.4.0
2021-12	CT#94-e	CP-213236	0444	1	F	Adding the ACSParameterProvision API specific data types table	17.4.0
2021-12	CT#94-e	CP-213217	0445	-	B	New Nnef_MBSSession service definition – Procedure's part	17.4.0
2021-12	CT#94-e	CP-213217	0446	-	B	New Nnef_MBSSession service definition - API part	17.4.0
2021-12	CT#94-e	CP-213204	0447	1	B	New Nnef_MBSSession service definition – OpenAPI part	17.4.0
2021-12	CT#94-e	CP-213223	0448	1	B	Clarification of AF preference for the user plane latency	17.4.0
2021-12	CT#94-e	CP-213223	0449	-	B	Clarification of direct notification	17.4.0
2021-12	CT#94-e	CP-213230	0450	1	B	Supporting network slice status retrieval	17.4.0
2021-12	CT#94-e	CP-213236	0451	1	B	Updates GET Query in ServiceParameter API	17.4.0
2021-12	CT#94-e	CP-213223	0452	1	B	Introduce Nnef_EASDeployment service	17.4.0
2021-12	CT#94-e	CP-213223	0453	1	B	Procedures to support Nnef_EASDeployment_Create service operation	17.4.0
2021-12	CT#94-e	CP-213223	0454	1	B	Procedures to support Nnef_EASDeployment_Update service operation	17.4.0
2021-12	CT#94-e	CP-213223	0455	1	B	Procedures to support Nnef_EASDeployment_Delete service operation	17.4.0
2021-12	CT#94-e	CP-213223	0460	-	B	AF Request for Simultaneous Connectivity over Source and Target PSA at Edge Relocation	17.4.0
2021-12	CT#94-e	CP-213200	0463	1	B	Updates to AM PolicyAuthorization error handling	17.4.0
2021-12	CT#94-e	CP-213218	0464	1	F	Sending UE ID to the AKMA AF	17.4.0
2021-12	CT#94-e	CP-213236	0465	1	F	Adding a list of APIs table	17.4.0
2021-12	CT#94-e	CP-213236	0466	1	F	Adding the TrafficInfluence API specific data types tables	17.4.0
2021-12	CT#94-e	CP-213246	0468	-	F	Update of OpenAPI version and TS version in externalDocs field	17.4.0
2022-03	CT#95-e	CP-220200	0469	-	F	MBS term alignment	17.5.0
2022-03	CT#95-e	CP-220189	0470	1	B	Support Dispersion Analytics in AnalyticsExposure API	17.5.0
2022-03	CT#95-e	CP-220200	0472	-	F	Updates to the Nnef_MBSTMG I service description	17.5.0
2022-03	CT#95-e	CP-220344	0473	1	F	Updates to the Nnef_MBSSession service description	17.5.0
2022-03	CT#95-e	CP-220200	0474	-	F	Updates to the Nnef_MBSSession API definition clauses	17.5.0
2022-03	CT#95-e	CP-220200	0475	1	F	Updates to the Nnef_MBSSession_Update service operation	17.5.0
2022-03	CT#95-e	CP-220203	0476	1	F	Adding the 5GLANParameterProvision API specific data types table	17.5.0
2022-03	CT#95-e	CP-220203	0477	1	F	Adding the IPTVConfiguration API specific data types table	17.5.0
2022-03	CT#95-e	CP-220203	0478	1	F	Adding the LpiParameterProvision API specific data types table	17.5.0
2022-03	CT#95-e	CP-220203	0479	-	F	Wrong reference correction	17.5.0
2022-03	CT#95-e	CP-220187	0480	2	B	Defining the reporting format for NSAC	17.5.0
2022-03	CT#95-e	CP-220187	0481	1	F	Clarifications to the case of multiple NSACFs	17.5.0
2022-03	CT#95-e	CP-220185	0482	1	F	Correct transaction id for service parameter provisioning	17.5.0
2022-03	CT#95-e	CP-220196	0483	2	F	Geographic area support for traffic influence	17.5.0
2022-03	CT#95-e	CP-220183	0484	3	B	Capability of 5G Access Stratum Time resource	17.5.0
2022-03	CT#95-e	CP-220183	0485	1	B	Procedure of management of 5G access stratum time distribution	17.5.0

2022-03	CT#95-e	CP-220183	0486	1	B	Methods and resource of management of 5G access stratum time distribution	17.5.0
2022-03	CT#95-e	CP-220326	0487	2	B	OpenAPI file of management of 5G access stratum time distribution	17.5.0
2022-03	CT#95-e	CP-220183	0488	2	B	State of time synchronization Configuration	17.5.0
2022-03	CT#95-e	CP-220320	0489	1	B	Support of configuration of PTP port	17.5.0
2022-03	CT#95-e	CP-220183	0490	2	B	Support of time synchronization error budget	17.5.0
2022-03	CT#95-e	CP-220329	0491	2	B	Support of AF triggered EAS rediscovery	17.5.0
2022-03	CT#95-e	CP-220185	0492	3	B	Updates to URSP rule in ServiceParameter API	17.5.0
2022-03	CT#95-e	CP-220185	0493	3	B	Resource structure and data model to support EAS Deployment information	17.5.0
2022-03	CT#95-e	CP-220186	0494	4	B	OpenAPI for AF provisioned EAS Deployment information	17.5.0
2022-03	CT#95-e	CP-220185	0495	1	B	Update procedures for Northbound EAS Deployment Information management	17.5.0
2022-03	CT#95-e	CP-220197	0496	1	F	Updates to AMPolicyAuthorization API	17.5.0
2022-03	CT#95-e	CP-220197	0497	-	F	Updates to AMInfluence API	17.5.0
2022-03	CT#95-e	CP-220203	0498	-	F	Adding the missing MBSSession API in the list of NEF APIs	17.5.0
2022-03	CT#95-e	CP-220181	0499	-	B	Add civic address type of accuracy to Monitoring Event API	17.5.0
2022-03	CT#95-e	CP-220186	0500	1	B	Resolutions related to URSP guidance inputs and procedures	17.5.0
2022-03	CT#95-e	CP-220173	0502	-	A	Correction of reference to 29.500 error codes	17.5.0
2022-03	CT#95-e	CP-220183	0503	1	B	Descriptions about alternative QoS related parameter sets in AsSessionWithQoS	17.5.0
2022-03	CT#95-e	CP-220196	0505	1	F	Correction to allow for multiple PDU Session types in a VN group	17.5.0
2022-03	CT#95-e	CP-220200	0506	1	B	Error Handling during MBS Session create operation	17.5.0
2022-03	CT#95-e	CP-220200	0507	1	F	Mbs Service Area update	17.5.0
2022-03	CT#95-e	CP-220200	0508	-	F	MbsSession data type update for MBS session creation response	17.5.0
2022-03	CT#95-e	CP-220333	0509	2	F	MBS Session status subscription and notification data type updates	17.5.0
2022-03	CT#95-e	CP-220181	0510	-	B	Service description to support AF retrieve UE ID	17.5.0
2022-03	CT#95-e	CP-220199	0511	1	B	Procedure to support GEM partial addition	17.5.0
2022-03	CT#95-e	CP-220186	0515	1	F	Precedence handling for URSP Rule determination	17.5.0
2022-03	CT#95-e	CP-220186	0516	1	F	Feature support for Edge Computing	17.5.0
2022-03	CT#95-e	CP-220186	0517	1	B	Report of UE Policy Delivery outcome when the URSP info is updated	17.5.0
2022-03	CT#95-e	CP-220187	0518	1	B	Completion of NSAC subscription procedure	17.5.0
2022-03	CT#95-e	CP-220187	0519	1	F	one-time reporting	17.5.0
2022-03	CT#95-e	CP-220172	0521	-	A	Correction to MO-LR	17.5.0
2022-03	CT#95-e	CP-220172	0523	-	A	Correction to MT-LR	17.5.0
2022-03	CT#95-e	CP-220172	0525	-	A	Correction to Location Privacy Indication Parameters Provisioning	17.5.0
2022-03	CT#95-e	CP-220197	0526	1	B	Subscription to AM related events with immediate report, AMPolicyAuthorization API	17.5.0
2022-03	CT#95-e	CP-220346	0530	3	B	Support PATCH for the update of an ACS Configuration Subscription resource	17.5.0
2022-03	CT#95-e	CP-220345	0532	2	B	Support PATCH for the update of an LPI Parameters Provisioning resource	17.5.0
2022-03	CT#95-e	CP-220204	0533	-	F	Updating the AMInfluence API General data model clause	17.5.0
2022-03	CT#95-e	CP-220204	0534	1	F	Updating the AMPolicyAuthorization API General data model clause	17.5.0
2022-03	CT#95-e	CP-220204	0535	-	F	Updating the EcsAddressProvision API General data model clause	17.5.0
2022-03	CT#95-e	CP-220204	0536	1	F	Updating the TimeSyncExposure API General data model clause	17.5.0
2022-03	CT#95-e	CP-220204	0537	-	F	Correcting the OAuth2 definitions in the OpenAPI description of the Nnef_MBSSession API	17.5.0
2022-03	CT#95-e	CP-220180	0538	-	B	Specifying the error case of KAKMA key not present in the AAnF	17.5.0
2022-03	CT#95-e	CP-220197	0539	-	F	Solution of remaining Editor's notes	17.5.0
2022-03	CT#95-e	CP-220183	0540	1	F	Formatting of description fields for TimeSyncExposure API	17.5.0
2022-03	CT#95-e	CP-220180	0541	-	F	Formatting of description fields for AKMA API	17.5.0
2022-03	CT#95-e	CP-220185	0542	-	F	Formatting of description fields for EcsAddressProvision API	17.5.0
2022-03	CT#95-e	CP-220198	0543	1	F	Formatting of description fields for AMInfluence API	17.5.0
2022-03	CT#95-e	CP-220198	0544	1	F	Formatting of description fields for AmPolicyAuthorization API	17.5.0
2022-03	CT#95-e	CP-220200	0545	-	F	Formatting of description fields for MBSTMGI API	17.5.0
2022-03	CT#95-e	CP-220200	0546	1	F	Formatting of description fields for MBSSession API	17.5.0
2022-03	CT#95-e	CP-220204	0547	1	F	Formatting of description fields	17.5.0
2022-03	CT#95-e	CP-220194	0548	-	F	Update of info and externalDocs fields	17.5.0
2022-06	CT#96	CP-221125	0512	2	B	Procedures for AF specific UE ID retrieval	17.6.0
2022-06	CT#96	CP-221125	0513	2	B	API definition to support AF specific UE ID retrieval	17.6.0
2022-06	CT#96	CP-221125	0514	3	B	OpenAPI file to support Nnef_UEId service	17.6.0
2022-06	CT#96	CP-221125	0527	2	B	Support AF specific UE ID retrieval procedures in MonitoringEvent API	17.6.0
2022-06	CT#96	CP-221125	0528	2	B	Support AF specific UE ID retrieval procedures in CpProvisioning API	17.6.0
2022-06	CT#96	CP-221125	0529	2	B	Support AF specific UE ID retrieval procedures in NpConfiguration API	17.6.0
2022-06	CT#96	CP-221130	0550	1	B	Support list of analytics subsets for AnalyticsExposure API	17.6.0
2022-06	CT#96	CP-221133	0551	2	B	Support DN Performance Analytics in AnalyticsExposure API	17.6.0

2022-06	CT#96	CP-221134	0552	4	B	Support Observed Service Experience Analytics in AnalyticsExposure API	17.6.0
2022-06	CT#96	CP-221120	0554	-	B	Location dependent MBS Session related updates	17.6.0
2022-06	CT#96	CP-221120	0555	-	B	MBS Frequency Selection Area Identifier related updates.	17.6.0
2022-06	CT#96	CP-221120	0556	1	B	MBS session QoS information updates	17.6.0
2022-06	CT#96	CP-221120	0557	-	B	MBS session Status Notify update with ingress tunnel address.	17.6.0
2022-06	CT#96	CP-221120	0558	-	B	MBS session Status Notify update with delivery status indication for broadcast session.	17.6.0
2022-06	CT#96	CP-221122	0559	1	F	AKID encoding clarification	17.6.0
2022-06	CT#96	CP-221122	0560	1	F	Afld related EN resolution.	17.6.0
2022-06	CT#96	CP-221144	0562	1	B	Correcting the usage of TSCTSF in the AsSessionWithQoS procedure	17.6.0
2022-06	CT#96	CP-221147	0563	1	F	Adding missing 5G features in re-used APIs	17.6.0
2022-06	CT#96	CP-221139	0564	1	F	Corrections to the AF provided inputs for NSAC	17.6.0
2022-06	CT#96	CP-221147	0565	1	F	Resolving the naming convention issues	17.6.0
2022-06	CT#96	CP-221147	0566	1	F	Adding a missing reference number	17.6.0
2022-06	CT#96	CP-221145	0568	3	F	Correction to state of configuration	17.6.0
2022-06	CT#96	CP-221144	0569	-	F	Correction to the Nnef_TimeSynchronization service operation description	17.6.0
2022-06	CT#96	CP-221144	0570	-	F	Correction to the TSCTSF discovery of 5G access stratum time distribution	17.6.0
2022-06	CT#96	CP-221144	0571	1	F	Correction to the TSCTSF discovery of subscription to notification of Time Synchronization Capabilities	17.6.0
2022-06	CT#96	CP-221144	0573	-	F	Impacts of overview by Nnef_ASTI service	17.6.0
2022-06	CT#96	CP-221144	0574	1	F	Procedure of 5G access stratum time distribution	17.6.0
2022-06	CT#96	CP-221144	0575	-	F	Error handling of 5G access stratum time distribution	17.6.0
2022-06	CT#96	CP-221144	0580	1	F	Correction to AF service identifier	17.6.0
2022-06	CT#96	CP-221126	0581	1	F	Correction to subscription to notification of outcome of UE Policies delivery	17.6.0
2022-06	CT#96	CP-221126	0582	3	F	Remove the editor's note related to AfNotification data type	17.6.0
2022-06	CT#96	CP-221147	0583	-	F	Correct IE name in service parameter provisioning	17.6.0
2022-06	CT#96	CP-221159	0584	-	F	Remove SUPI from AM influence	17.6.0
2022-06	CT#96	CP-221131	0585	1	B	Add requirements of dispersion analytics to Nnef_AnalyticsExposure_Fetch service operation	17.6.0
2022-06	CT#96	CP-221129	0586	-	B	Support of requesting and reporting the list of top applications	17.6.0
2022-06	CT#96	CP-221142	0589	3	B	Definition of Data Collection and Reporting API	17.6.0
2022-06	CT#96	CP-221142	0590	4	B	Description of Data Collection and Reporting API	17.6.0
2022-06	CT#96	CP-221252	0591	4	B	Separation of ASTI and TimeSynch services	17.6.0
2022-06	CT#96	CP-221159	0592	-	F	AMInfluence API: reused data types	17.6.0
2022-06	CT#96	CP-221159	0593	1	F	Definition of AmInfluSubPatch data type	17.6.0
2022-06	CT#96	CP-221126	0594	2	F	Correction to creation of a new Individual EAS Deployment information resource	17.6.0
2022-06	CT#96	CP-221126	0595	2	F	Correction to data type of EAS Deployment information	17.6.0
2022-06	CT#96	CP-221126	0597	-	F	Resolve editor's notes in EAS Deployment Information management	17.6.0
2022-06	CT#96	CP-221125	0598	2	B	Supporting user consent for EDGEAPP on the Nnef_EventExposure API	17.6.0
2022-06	CT#96	CP-221147	0599	-	F	Correction of authorization description for NEF APIs	17.6.0
2022-06	CT#96	CP-221147	0600	-	B	Update re-used data types for TrafficInfluence API	17.6.0
2022-06	CT#96	CP-221136	0601	1	B	Adding support for requesting analytics within a specified time	17.6.0
2022-06	CT#96	CP-221136	0602	1	F	Corrections in the error handling of Analytics Exposure	17.6.0
2022-06	CT#96	CP-221136	0603	1	F	Corrections of feature handling in Analytics Exposure	17.6.0
2022-06	CT#96	CP-221133	0604	-	B	Muting notifications	17.6.0
2022-06	CT#96	CP-221145	0605	1	F	Clarification of the relationship between Nnef_TimeSynchronization and Nnef_ASTI	17.6.0
2022-06	CT#96	CP-221145	0606	1	F	Correction to procedure of TSC QoS information provisioning	17.6.0
2022-06	CT#96	CP-221122	0607	1	F	AKMA resource update for Error case	17.6.0
2022-06	CT#96	CP-221120	0608	1	F	Resolution of EN related to Error cases related to MBS session management.	17.6.0
2022-06	CT#96	CP-221120	0609	1	F	Resolution of EN related to Error cases related to TMGI management.	17.6.0
2022-06	CT#96	CP-221121	0610	1	F	MBS Session API resources method update	17.6.0
2022-06	CT#96	CP-221142	0611	1	B	Definition of Data Reporting Provisioning API	17.6.0
2022-06	CT#96	CP-221142	0612	1	B	Description of Data Reporting Provisioning API	17.6.0
2022-06	CT#96	CP-221246	0613	4	F	Defining FQDN information for EAS deployment	17.6.0
2022-06	CT#96	CP-221145	0614	1	F	Time Synchronization Error Budget	17.6.0
2022-06	CT#96	CP-221134	0615	-	B	Update the reporting threshold for AnalyticsExposure service	17.6.0
2022-06	CT#96	CP-221120	0616	-	F	Updating the identifier of an Individual MBS Session resource	17.6.0
2022-06	CT#96	CP-221120	0617	-	F	Corrections to the OpenAPI description of the Nnef_MBSSession API	17.6.0
2022-06	CT#96	CP-221264	0618	2	B	Supporting event requirements provisioning for the TrafficInfluence API	17.6.0

2022-06	CT#96	CP-221126	0619	-	F	Support the update of notifUri for ServiceParameter API	17.6.0
2022-06	CT#96	CP-221144	0620	-	F	Support the update of notifUri for TimeSyncExposure API	17.6.0
2022-06	CT#96	CP-221147	0621	1	F	Update the definition of notifUri for TrafficInfluence API	17.6.0
2022-06	CT#96	CP-221159	0622	-	F	Corrections related to notifUri for DCAMP	17.6.0
2022-06	CT#96	CP-221117	0624	-	A	Correction to UP path notification	17.6.0
2022-06	CT#96	CP-221128	0626	1	A	value range of confidence	17.6.0
2022-06	CT#96	CP-221128	0628	1	A	NEF mapping for Analytics Exposure Subscription	17.6.0
2022-06	CT#96	CP-221157	0630	1	F	Support the update of notifUri for AnalyticsExposure API	17.6.0
2022-06	CT#96	CP-221261	0631	2	B	Defining the OpenAPI description of the Data Reporting API	17.6.0
2022-06	CT#96	CP-221262	0632	3	B	Defining the OpenAPI description of the Data Reporting Provisioning API	17.6.0
2022-06	CT#96	CP-221126	0634	1	F	Geographic area support for URSP	17.6.0
2022-06	CT#96	CP-221147	0635	-	F	Updates to multiple query parameters in ServiceParameter API	17.6.0
2022-06	CT#96	CP-221151	0636	-	F	Update of info and externalDocs fields	17.6.0
2022-09	CT#97-e	CP-222110	0637	1	B	Updates to Data Reporting Provisioning API	17.7.0
2022-09	CT#97-e	CP-222098	0638	1	F	Resolve EN for AF specific UE Id retrieval in MonitoringEvent API	17.7.0
2022-09	CT#97-e	CP-222098	0639	1	F	Resolve EN for AF specific UE Id retrieval in CpProvisioning API	17.7.0
2022-09	CT#97-e	CP-222098	0640	1	F	Resolve EN for AF specific UE Id retrieval in NpConfiguraton API	17.7.0
2022-09	CT#97-e	CP-222110	0641	-	F	Correction of Data reporting API Redirection handling	17.7.0
2022-09	CT#97-e	CP-222103	0642	1	F	Adding missing attributes to AnalyticsData	17.7.0
2022-09	CT#97-e	CP-222104	0643	2	F	Applicability update for AnalyticsEventFilter	17.7.0
2022-09	CT#97-e	CP-222103	0644	1	F	Applicability correction for AnalyticsEventFilterSubsc	17.7.0
2022-09	CT#97-e	CP-222103	0645	1	F	Visited Areas addition for AnalyticsEventFilterSubsc & AnalyticsEventFilter	17.7.0
2022-09	CT#97-e	CP-222103	0646	1	F	Matching Direction addition for AnalyticsEventFilterSubsc	17.7.0
2022-09	CT#97-e	CP-222095	0647	1	F	Resolution of EN related to Event reports in MBS session management.	17.7.0
2022-09	CT#97-e	CP-222110	0649	-	F	Correction for service name of DataReportingProvisioning API	17.7.0
2022-09	CT#97-e	CP-222113	0650	-	F	Correction for StateOfDdst data type of TimeSyncExposure API	17.7.0
2022-09	CT#97-e	CP-222097	0651	2	F	Correction of Application Port ID for UEId API	17.7.0
2022-09	CT#97-e	CP-222099	0654	-	F	Correction to QoS monitoring notification when direct notification is requested	17.7.0
2022-09	CT#97-e	CP-222113	0655	2	F	Correction to subscription to notification of Time Synchronization Capabilites	17.7.0
2022-09	CT#97-e	CP-222099	0657	1	F	Correction to notification of outcome of the UE Policy Delivery	17.7.0
2022-09	CT#97-e	CP-222110	0658	1	B	API general clauses in Nnef_MSEventExposure API	17.7.0
2022-09	CT#97-e	CP-222110	0659	1	B	API resource clauses in Nnef_MSEventExposure API	17.7.0
2022-09	CT#97-e	CP-222110	0660	1	B	API notification clauses in Nnef_MSEventExposure API	17.7.0
2022-09	CT#97-e	CP-222110	0661	1	B	API data model in Nnef_MSEventExposure API	17.7.0
2022-09	CT#97-e	CP-222110	0662	1	B	Procedures descriptions in Nnef_MSEventExposure API	17.7.0
2022-09	CT#97-e	CP-222110	0663	1	B	OpenAPI file of Nnef_MSEventExposure API	17.7.0
2022-09	CT#97-e	CP-222110	0664	1	B	General descriptions for Nnef_MSEventExposure API	17.7.0
2022-09	CT#97-e	CP-222114	0665	1	F	Wrong grouping of Time Synchronization procedures	17.7.0
2022-09	CT#97-e	CP-222113	0666	-	F	Removal of the mapping of GPSIs and Group Identifiers to a SUPI list	17.7.0
2022-09	CT#97-e	CP-222099	0667	-	F	Correction in EAS Deployment Information creation procedure	17.7.0
2022-09	CT#97-e	CP-222099	0668	1	F	Custom deletion of EAS Deployment Information	17.7.0
2022-09	CT#97-e	CP-222117	0669	-	F	Application errors handling for the TimeSyncExposure API	17.7.0
2022-09	CT#97-e	CP-222117	0670	-	F	Application errors handling for the AMPolicyAuthorization API	17.7.0
2022-09	CT#97-e	CP-222117	0671	-	F	Application errors handling for the ASTI API	17.7.0
2022-09	CT#97-e	CP-222113	0672	-	F	ASTI API: definition of error responses	17.7.0
2022-09	CT#97-e	CP-222118	0673	1	F	Body in relayed error response	17.7.0
2022-09	CT#97-e	CP-222101	0674	-	F	Corrections related to top applications for congestion	17.7.0
2022-09	CT#97-e	CP-222127	0675	-	F	Data type of evSubscs attribute	17.7.0
2022-09	CT#97-e	CP-222127	0676	-	F	Removable attributes within AppAmContextExpUpdateData	17.7.0
2022-09	CT#97-e	CP-222127	0677	-	F	Misalignment of data type defintion in AMPolicyAuthorization API	17.7.0
2022-09	CT#97-e	CP-222125	0681	-	F	Correction to QoS monitoring notification	17.7.0
2022-09	CT#97-e	CP-222118	0683	1	F	he events subscribed by the NEF	17.7.0
2022-09	CT#97-e	CP-222126	0684	1	F	Correction to UP Path change notification	17.7.0
2022-09	CT#97-e	CP-222127	0686	1	F	Missing description field for enumeration data types	17.7.0
2022-09	CT#97-e	CP-222125	0689	1	F	Applicable accuracy value	17.7.0
2022-09	CT#97-e	CP-222094	0690	-	B	Define API general clauses in Nnef_MBSUserDataIngestSession API	17.7.0
2022-09	CT#97-e	CP-222094	0691	1	B	Define API resource clauses in Nnef_MBSUserDataIngestSession API	17.7.0
2022-09	CT#97-e	CP-222094	0692	-	B	Define API notification clauses in Nnef_MBSUserDataIngestSession API	17.7.0
2022-09	CT#97-e	CP-222094	0693	1	B	Define API data model in Nnef_MBSUserDataIngestSession API	17.7.0
2022-09	CT#97-e	CP-222094	0694	1	B	Define Service and Service Operations in Nnef_MBSUserDataIngestSession API	17.7.0
2022-09	CT#97-e	CP-222094	0695	1	B	Define OpenAPI file of Nnef_MBSUserDataIngestSession API	17.7.0
2022-09	CT#97-e	CP-222099	0696	1	F	Corrections to URSP rule in ServiceParameter API	17.7.0

2022-09	CT#97-e	CP-222118	0697	1	F	Missing description field for enumeration data type in IPTVConfiguration API	17.7.0
2022-09	CT#97-e	CP-222118	0698	1	F	Missing description field for enumeration data type in TrafficInfluence API	17.7.0
2022-09	CT#97-e	CP-222094	0699	1	B	Adding the support of MBS Service Requirements for the Nnef_MBSSession API	17.7.0
2022-09	CT#97-e	CP-222094	0700	1	B	Completing the definition of the Nnef_MBSSession API	17.7.0
2022-09	CT#97-e	CP-222094	0701	1	F	Miscellaneous corrections to the Nnef_MBSSession API	17.7.0
2022-09	CT#97-e	CP-222094	0702	-	F	Miscellaneous corrections to the Nnef_MBSTMGI API	17.7.0
2022-09	CT#97-e	CP-222094	0703	-	B	Updating the service description clauses to support MBS Session Authorization provisioning	17.7.0
2022-09	CT#97-e	CP-222094	0704	-	B	Updating the resources clause to support MBS Session Authorization provisioning	17.7.0
2022-09	CT#97-e	CP-222094	0705	-	B	Updating the data model clauses to support MBS Session Authorization provisioning	17.7.0
2022-09	CT#97-e	CP-222207	0706	2	B	Updating the OpenAPI description to support MBS Session Authorization provisioning	17.7.0
2022-09	CT#97-e	CP-222094	0707	-	B	Defining the service description clauses of the Nnef_MBSUserService API	17.7.0
2022-09	CT#97-e	CP-222094	0708	-	B	Defining the API general clauses of the Nnef_MBSUserService API	17.7.0
2022-09	CT#97-e	CP-222094	0709	-	B	Defining the API resources clause of the Nnef_MBSUserService API	17.7.0
2022-09	CT#97-e	CP-222094	0710	-	B	Defining the API notifications clause of the Nnef_MBSUserService API	17.7.0
2022-09	CT#97-e	CP-222094	0711	-	B	Defining the API data model clause of the Nnef_MBSUserService API	17.7.0
2022-09	CT#97-e	CP-222095	0712	1	B	Defining the OpenAPI description of the Nnef_MBSUserService API	17.7.0
2022-09	CT#97-e	CP-222098	0714	1	F	Essential corrections to the application errors defined for the Nnef_UEId API	17.7.0
2022-09	CT#97-e	CP-222098	0715	1	F	Corrections to user consent management for the Nnef_EventExposure API	17.7.0
2022-09	CT#97-e	CP-222097	0716	-	F	Essential corrections to the application errors defined for AF specific UE ID retrieval via the CpProvisioning API	17.7.0
2022-09	CT#97-e	CP-222097	0717	-	F	Essential corrections to the application errors defined for AF specific UE ID retrieval via the MonitoringEvent API	17.7.0
2022-09	CT#97-e	CP-222097	0718	-	F	Essential corrections to the application errors defined for AF specific UE ID retrieval via the NpConfiguration API	17.7.0
2022-09	CT#97-e	CP-222111	0720	1	F	Miscellaneous corrections to the definition of the DataReporting API	17.7.0
2022-09	CT#97-e	CP-222111	0721	1	F	Miscellaneous corrections to the definition of the DataReportingProvisioning API	17.7.0
2022-09	CT#97-e	CP-222117	0722	-	F	Error handling clause alignment with other NBI and 5GS APIs	17.7.0
2022-09	CT#97-e	CP-222118	0724	1	F	Application errors handling for the AnalyticsExposure API	17.7.0
2022-09	CT#97-e	CP-222114	0725	1	F	Operation identifiers for TimeSyncExposure API and ASTI API	17.7.0
2022-09	CT#97-e	CP-222096	0726	-	F	Operation identifiers for AKMA API	17.7.0
2022-09	CT#97-e	CP-222097	0727	-	F	Operation identifiers for UEId API	17.7.0
2022-09	CT#97-e	CP-222099	0728	1	F	Operation identifiers for EcsAddressProvision API and EASDeployment API	17.7.0
2022-09	CT#97-e	CP-222118	0729	1	F	Operation identifiers for NEF northbound APIs	17.7.0
2022-09	CT#97-e	CP-222102	0730	-	F	Add restriction for exposing information to an untrusted AF	17.7.0
2022-09	CT#97-e	CP-222121	0731	-	F	Update of info and externalDocs fields	17.7.0
2022-09	CT#97-e	CP-222096	0732	-	B	Support the anonymous user access	17.7.0
2022-12	CT#98-e	CP-223161	0734	1	A	Correction of the minimum items in the GET response of LpiParametersProvision	17.8.0
2022-12	CT#98-e	CP-223172	0736	-	F	Analytics exposure restrictions	17.8.0
2022-12	CT#98-e	CP-223181	0737	1	F	Corrections of the TSCTSF usage determination in AF session with QoS	17.8.0
2022-12	CT#98-e	CP-223175	0740	1	A	Corrections in ServiceParameter API	17.8.0
2022-12	CT#98-e	CP-223184	0742	1	F	Corrections in TimeSyncExposure API	17.8.0
2022-12	CT#98-e	CP-223197	0743	1	F	Corrections in AMPolicyAuthorization API	17.8.0
2022-12	CT#98-e	CP-223184	0745	1	F	Corrections in procedure for NEF north bound interfaces	17.8.0
2022-12	CT#98-e	CP-223167	0747	1	F	Data type Cardinality corrections for GET response in MBSSession API	17.8.0
2022-12	CT#98-e	CP-223166	0748	-	F	Data type Cardinality corrections for GET response in MBSUserDataIngestSession API	17.8.0
2022-12	CT#98-e	CP-223166	0749	-	F	Data type Cardinality corrections for GET response in MBSUserService Service API	17.8.0
2022-12	CT#98-e	CP-223179	0750	-	F	Data type Cardinality corrections for GET response in MSEventExposure API	17.8.0
2022-12	CT#98-e	CP-223166	0751	-	F	Corrections on MBS FSA IDs for broadcast MBS session creation	17.8.0
2022-12	CT#98-e	CP-223171	0753	-	F	Correction to the EASDeployment API	17.8.0
2022-12	CT#98-e	CP-223167	0754	1	F	Updates to NEF Northbound APIs Overview and Introduction	17.8.0

2022-12	CT#98-e	CP-223196	0757	1	F	Correction related to applicability of traffic correlation indicator	17.8.0
2022-12	CT#98-e	CP-223172	0758	-	F	Corrections to data types in AnalyticsExposure API	17.8.0
2022-12	CT#98-e	CP-223181	0759	1	F	Corrections on Time Synchronization Capabilites subscription procedure	17.8.0
2022-12	CT#98-e	CP-223168	0760	1	F	Correction for AKMA Application Key Request	17.8.0
2022-12	CT#98-e	CP-223167	0761	1	F	Corrections for MBSSession service	17.8.0
2022-12	CT#98-e	CP-223173	0762	1	F	Add clarifications for some information included in the analytics to the consumer	17.8.0
2022-12	CT#98-e	CP-223197	0763	1	F	Corrections for Nnef_AMPolicyAuthorization service	17.8.0
2022-12	CT#98-e	CP-223240	0767	1	F	Update of info and externalDocs fields	17.8.0
2023-03	CT#99	CP-230131	0771	1	F	Adding MBS service area to the TmgiAllocRequest	17.9.0
2023-03	CT#99	CP-230154	0772	-	F	Packet delay budget attribute name correction	17.9.0
2023-03	CT#99	CP-230138	0790	1	F	Resolve editor notes on user consent during AF specific UE ID retrieval	17.9.0
2023-03	CT#99	CP-230145	0799	-	F	misspelled attribute anyUeInd	17.9.0
2023-03	CT#99	CP-230140	0801	-	F	incorrect attribute name	17.9.0
2023-03	CT#99	CP-230173	0812	1	F	Correction on handling of Packet Delay Failure report Threshold	17.9.0
2023-03	CT#99	CP-230154	0824	1	F	Correction to TSCTSF invocation	17.9.0
2023-03	CT#99	CP-230154	0829	-	F	Removal of the remaining ENs in the definition of the Nnef_TimeSyncExposure API	17.9.0
2023-03	CT#99	CP-230145	0834	1	F	Clarification for historical analytics exposure	17.9.0
2023-03	CT#99	CP-230155	0839	-	F	Missing features for AsSessionWithQoS API	17.9.0
2023-03	CT#99	CP-230154	0846	1	F	Correction of the procedure when the NEF reject the AF update request	17.9.0
2023-03	CT#99	CP-230160	0848	-	F	Update of info and externalDocs fields	17.9.0
2023-06	CT#100	CP-231154	0915	-	F	Wrong attribute name in EAS deployment	17.10.0
2023-06	CT#100	CP-231172	0919	-	A	Monitoring procedure corrections	17.10.0
2023-06	CT#100	CP-231176	0929	-	F	Update MBS service area to the TmgiAllocRequest	17.10.0
2023-06	CT#100	CP-231167	0951	1	F	Reporting format for one-time reporting	17.10.0
2023-06	CT#100	CP-231161	0965	-	F	Update of info and externalDocs fields	17.10.0
2023-09	CT#101	CP-232122	0977	-	F	Misalignment for the HTTP errors supported by the ASTI API	17.11.0
2023-09	CT#101	CP-232112	0995	-	A	Corrections to external Group ID in ServiceParameter API	17.11.0
2023-09	CT#101	CP-232123	1019	-	F	Incorrect description of anyUeInd attribute	17.11.0
2023-09	CT#101	CP-232118	1041	-	F	Update of info and externalDocs fields	17.11.0
2023-12	CT#102	CP-233255	1061	-	F	Removal of error indicating failure in reserving transmission resources for MBS Session.	17.12.0
2023-12	CT#102	CP-233276	1078	-	F	Incorrect data type in Media Streaming Event Exposure notification	17.12.0
2023-12	CT#102	CP-233126	1104	2	F	Reduced area indication when MBS service area is larger than MB-SMF service area	17.12.0
2023-12	CT#102	CP-233263	1131	2	F	Corrections to boolean type definitions	17.12.0
2023-12	CT#102	CP-233258	1133	1	F	Correction on failure reason for event notification	17.12.0
2023-12	CT#102	CP-233260	1149	-	F	Update of info and externalDocs fields	17.12.0
2024-03	CT#103	CP-240182	1170	-	F	Corrections on PTP Relay instance	17.13.0
2024-03	CT#103	CP-240170	1193	1	A	Corrections on QoS monitoring reports	17.13.0
2024-06	CT#104	CP-241104	1244		F	Corrections to TimeSyncExposure and ASTI services	17.14.0
2024-06	CT#104	CP-241115	1262		A	Essential corrections to the PATCH method on the Individual 5GLAN Parameters Provisioning Subscription resource	17.14.0
2024-06	CT#104	CP-241133	1285	1	F	Correction on Data Reporting Provisioning Session Uri	17.14.0
2024-06	CT#104	CP-241109	1317		F	Update of info and externalDocs fields	17.14.0
2024-09	CT#105	CP-242149	1322	1	F	Clarifications to MBS Service Area related error handling	17.15.0
2024-09	CT#105	CP-242132	1357		F	Update of info and externalDocs fields	17.15.0

History

Document history		
V17.5.0	May 2022	Publication
V17.6.0	July 2022	Publication
V17.7.0	September 2022	Publication
V17.8.0	January 2023	Publication
V17.9.0	April 2023	Publication
V17.10.0	July 2023	Publication
V17.11.0	September 2023	Publication
V17.12.0	January 2024	Publication
V17.13.0	April 2024	Publication
V17.14.0	July 2024	Publication
V17.15.0	September 2024	Publication