

ETSI TS 124 322 V17.0.0 (2022-04)



**Universal Mobile Telecommunications System (UMTS);
LTE;
Tunnelling of IP Multimedia Subsystem (IMS)
services over restrictive access networks;
Stage 3
(3GPP TS 24.322 version 17.0.0 Release 17)**



Reference

RTS/TSGC-0124322vh00

Keywords

LTE, UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope	6
2 References	6
3 Definitions and abbreviations.....	7
3.1 Definitions	7
3.2 Abbreviations	7
4 UE – network protocols.....	7
4.1 General	7
5 FTT-IMS protocol	8
5.1 General	8
5.2 UE requested FTT-IMS establishment procedure	8
5.2.1 General.....	8
5.2.2 UE procedures	8
5.2.2.1 UE requested FTT-IMS establishment procedure initiation.....	8
5.2.2.2 UE requested FTT-IMS establishment procedure initiation via restrictive non-3GPP access network type I	8
5.2.2.3 UE requested FTT-IMS establishment procedure initiation via restrictive non-3GPP access network type II	8
5.2.2.4 UE requested FTT-IMS establishment procedure accepted	9
5.2.3 EFTF procedures	9
5.3 IP packet transport FTT-IMS procedure	9
5.3.1 General.....	9
5.3.2 UE procedures	9
5.3.2.1 IP packet sending	9
5.3.2.2 IP packet receiving.....	9
5.3.3 EFTF procedures	9
5.3.3.1 IP packet sending	9
5.3.3.2 IP packet receiving.....	9
5.4 UE requested FTT-IMS release procedure	10
5.4.1 General.....	10
5.4.2 UE procedures	10
5.4.3 EFTF procedures	10
5.5 EFTF requested FTT-IMS release procedure	10
5.5.1 General.....	10
5.5.2 EFTF procedures	10
5.5.3 UE procedures	10
5.6 Procedure for unknown FTT-IMS envelope types	10
5.6.1 General.....	10
5.6.2 UE procedures	11
5.6.3 EFTF procedures	11
6 IP roles and IP based procedures.....	11
6.1 General	11
6.2 IP roles	11
6.2.1 UE procedures	11
6.2.2 EFTF procedures	11
6.3 Inner IP address assignment procedure	11
6.3.1 UE procedures	11
6.3.2 EFTF procedures	12
7 PDUs and parameters	12

7.1	PDU and parameters specific to FTT-IMS protocol	12
7.1.1	General.....	12
7.1.2	Message types of FTT-IMS messages	12
7.1.2.1	Generic FTT-IMS envelope	12
7.1.2.2	IP packet envelope	13
Annex A (informative):	Change history	14
History		15

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies procedures and protocol elements for tunnelling of IMS traffic over restrictive access networks, specifically procedures and protocol elements for establishing, maintaining, and sending traffic via a firewall traversal tunnel between the UE and an enhanced firewall traversal function (EFTF) in the network. The present document is applicable to UE and EFTF.

The present document applies only to the case when the IMS traffic is not routed via EPC of a PLMN. Procedures for tunnelling of IMS traffic that is routed via EPC are specified in 3GPP TS 24.302 [3] annex F.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 24.229: "IP multimedia call control protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP); Stage 3".
- [3] 3GPP TS 24.302: "Access to the 3GPP Evolved Packet Core (EPC) via non-3GPP access networks; Stage 3".
- [4] 3GPP TS 33.203: "3G security; Access security for IP-based services".
- [5] IETF RFC 791 (September 1981): "Internet Protocol".
- [6] IETF RFC 2131 (March 1997): "Dynamic Host Configuration Protocol".
- [7] IETF RFC 2460 (December 1998): "Internet Protocol, Version 6 (IPv6) Specification".
- [8] IETF RFC 2817 (May 2000): "Upgrading to TLS Within HTTP/1.1".
- [9] IETF RFC 3736 (April 2004): "Stateless Dynamic Host Configuration Protocol (DHCP) Service for IPv6".
- [10] IETF RFC 4291 (February 2006): "IP Version 6 Addressing Architecture".
- [11] IETF RFC 4862 (September 2007): "IPv6 Stateless Address Autoconfiguration".
- [12] Void.
- [13] Void.
- [14] 3GPP TS 33.310: "Network Domain Security (NDS); Authentication Framework (AF)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply.

A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

Firewall traversal tunnel to IP network of IMS: a TCP connection with TLS connection enabling passing of envelopes between UE in restrictive non-3GPP access network and EFTF, established in order to reach IP network of IP multimedia core network subsystem.

For the purposes of the present document, the following terms and definitions given in 3GPP TS 24.229 [2] apply:

IP multimedia core network subsystem

For the purposes of the present document, the following terms and definitions given in 3GPP TS 24.302 [3] apply:

Restrictive non-3GPP access network type I
Restrictive non-3GPP access network type II
Restrictive non-3GPP access network

For the purposes of the present document, the following terms and definitions given in 3GPP TS 33.203 [4] apply:

Enhanced firewall traversal function

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

EFTF	Enhanced firewall traversal function
FTT-IMS	Firewall traversal tunnel to IP network of IMS
HTTP	Hypertext transfer protocol
IMS	IP multimedia core network subsystem
TCP	Transmission control protocol
TLS	Transport layer security
URI	Uniform resource identifier

4 UE – network protocols

4.1 General

In order to access to IMS via restrictive non-3GPP access network, the UE and the EFTF shall establish a firewall traversal tunnel to IP network of IMS (FTT-IMS) using the UE requested FTT-IMS establishment procedure according to subclause 5.2.

The UE and the EFTF shall send the IP packets using the IP packet transport FTT-IMS procedure according to subclause 5.3.

The UE and the EFTF shall use the IP protocol according to clause 6.

When FTT-IMS is no longer needed (e.g. if the UE deregistered from IMS), the UE shall perform the UE requested FTT-IMS release procedure according to subclause 5.4.

When FTT-IMS is no longer needed, the EFTF can perform the EFTF requested FTT-IMS release procedure according to subclause 5.5.

NOTE: Keep-alive functionality is not defined in this document. Keep-alive functionality defined in 3GPP TS 24.229 [2] can be used to maintain the FTT-IMS between the UE and the EFTF.

5 FTT-IMS protocol

5.1 General

The FTT-IMS protocol consists of the UE requested FTT-IMS establishment procedure, the IP packet transport FTT-IMS procedure, the UE requested FTT-IMS release procedure and the EFTF requested FTT-IMS release procedure.

5.2 UE requested FTT-IMS establishment procedure

5.2.1 General

The purpose of the UE requested FTT-IMS establishment procedure is to establish an FTT-IMS between the UE and the EFTF.

5.2.2 UE procedures

5.2.2.1 UE requested FTT-IMS establishment procedure initiation

If the UE is not configured with an HTTP proxy address, the UE shall follow the procedures in subclause 5.2.2.2.

If the UE is configured with an HTTP proxy address, the UE shall follow the procedures in subclause 5.2.2.3.

NOTE: UE configuration of an HTTP proxy address is out of scope of 3GPP.

5.2.2.2 UE requested FTT-IMS establishment procedure initiation via restrictive non-3GPP access network type I

In order to establish an FTT-IMS, the UE shall establish a TCP connection to the EFTF address and destination port 443.

If the TCP connection establishment is successful, the UE shall establish a TLS connection over the TCP connection according to the TLS profile specified in 3GPP TS 33.310 [14] annex E. If the EFTF address is a FQDN, the UE shall include a TLS extension of type "server_name" in the TLS client hello message according to the TLS profile specified in 3GPP TS 33.310 [14] annex E.

5.2.2.3 UE requested FTT-IMS establishment procedure initiation via restrictive non-3GPP access network type II

If the UE is configured with HTTP proxy address, in order to establish an FTT-IMS, the UE shall send HTTP CONNECT request to the HTTP proxy address according to IETF RFC 2817 [8]. The UE shall populate Request-URI of the HTTP CONNECT request with the EFTF address and port 443.

Upon receiving HTTP 2xx response to HTTP CONNECT request, the UE shall establish TLS connection according to the TLS profile specified in 3GPP TS 33.310 [14] annex E over the TCP connection used for the HTTP CONNECT request transport. If the EFTF address is a FQDN, the UE shall include a TLS extension of type "server_name" in the TLS client hello message according to the TLS profile specified in 3GPP TS 33.310 [14] annex E.

5.2.2.4 UE requested FTT-IMS establishment procedure accepted

When valid TLS Finished message is received over the TCP connection, the UE shall use the connection as the FTT-IMS.

5.2.3 EFTF procedures

The EFTF shall handle the TCP connection setup and the TLS connection establishment according to the TLS profile specified in 3GPP TS 33.310 [14] annex E.

When TLS Finished message is sent over the TCP connection according to the TLS profile specified in 3GPP TS 33.310 [14] annex E, the EFTF shall use the connection as the FTT-IMS.

5.3 IP packet transport FTT-IMS procedure

5.3.1 General

The purpose of the IP packet transport FTT-IMS procedure is to transport an IPv4 packet or IPv6 packet over an FTT-IMS.

5.3.2 UE procedures

5.3.2.1 IP packet sending

In order to send an IPv4 packet or IPv6 packet, the UE shall create an IP packet envelope according to subclause 7.1.2.2, and shall populate the IP packet field of the IP packet envelope with the IPv4 packet or the IPv6 packet and shall send the IP packet envelope as TLS application data over the FTT-IMS.

5.3.2.2 IP packet receiving

Upon receiving the IP packet envelope as TLS application data over the FTT-IMS, the UE shall:

- if the UE supports IPv4 and the field in the four most significant bits of the first octet of the IP packet field of the IP packet envelope according to subclause 7.1.2.2 contains 4, handle the IP packet as an IPv4 packet according to IETF RFC 791 [5];
- if the UE supports IPv6 and the field in the four most significant bits of the first octet of the IP packet field of the IP packet envelope according to subclause 7.1.2.2 contains 6, handle the IP packet as an IPv6 packet according to IETF RFC 2460 [7]; and
- if the field in the four most significant bits of the first octet of the IP packet field of the IP packet envelope according to subclause 7.1.2.2 indicates not supported IP version, discard the IP packet envelope.

NOTE: The field in the four most significant bits of the first octet of both the IPv4 packet and the IPv6 packet indicates the IP version.

5.3.3 EFTF procedures

5.3.3.1 IP packet sending

In order to send an IPv4 packet or IPv6 packet, the EFTF shall create an IP packet envelope according to subclause 7.1.2.2, and shall populate the IP packet field of the IP packet envelope with the IPv4 packet or the IPv6 packet and shall send the IP packet envelope as TLS application data over the FTT-IMS.

5.3.3.2 IP packet receiving

Upon receiving the IP packet envelope as TLS application data over the FTT-IMS, the EFTF shall:

- if the EFTF supports IPv4 and the field in the four most significant bits of the first octet of the IP packet field of the IP packet envelope according to subclause 7.1.2.2 contains 4, handle the IP packet as an IPv4 packet according to IETF RFC 791 [5];
- if the EFTF supports IPv6 and the field in the four most significant bits of the first octet of the IP packet field of the IP packet envelope according to subclause 7.1.2.2 contains 6, handle the IP packet as an IPv6 packet according to IETF RFC 2460 [7]; and
- if the field in the four most significant bits of the first octet of the IP packet field of the IP packet envelope according to subclause 7.1.2.2 indicates not supported IP version, discard the IP packet envelope.

NOTE: The field in the four most significant bits of the first octet of both the IPv4 packet and the IPv6 packet indicates the IP version.

5.4 UE requested FTT-IMS release procedure

5.4.1 General

The purpose of the UE requested FTT-IMS release procedure is to release an FTT-IMS when FTT-IMS is no longer needed.

5.4.2 UE procedures

In order to release the FTT-IMS, the UE shall send TLS close_notify alert according to the TLS profile specified in 3GPP TS 33.310 [14] annex E

5.4.3 EFTF procedures

The EFTF shall handle the TLS close_notify alert according to the TLS profile specified in 3GPP TS 33.310 [14] annex E.

5.5 EFTF requested FTT-IMS release procedure

5.5.1 General

The purpose of the EFTF requested FTT-IMS release procedure is to release an FTT-IMS when FTT-IMS is no longer needed.

5.5.2 EFTF procedures

In order to release the FTT-IMS, the EFTF shall send TLS close_notify alert according to the TLS profile specified in 3GPP TS 33.310 [14] annex E.

5.5.3 UE procedures

The UE shall handle the TLS close_notify alert according to the TLS profile specified in 3GPP TS 33.310 [14] annex E.

5.6 Procedure for unknown FTT-IMS envelope types

5.6.1 General

The purpose of this procedure is forward compatibility.

5.6.2 UE procedures

Upon receiving a generic FTT-IMS envelope with the type field indicating an envelope type other than the envelope types defined by this version of specification in subclause 7.1.2, the UE shall discard the generic FTT-IMS envelope.

5.6.3 EFTF procedures

Upon receiving a generic FTT-IMS envelope with the type field indicating an envelope type other than the envelope types defined by this version of specification in subclause 7.1.2, the EFTF shall discard the generic FTT-IMS envelope.

6 IP roles and IP based procedures

6.1 General

This subclause describes IP roles and IP based procedures.

6.2 IP roles

6.2.1 UE procedures

If IPv4 is supported, the UE shall support acting as host according to IETF RFC 791 [5].

If IPv6 is supported, the UE shall support acting as host according to IETF RFC 2460 [7].

6.2.2 EFTF procedures

If IPv4 is supported, the EFTF shall support acting as gateway according to IETF RFC 791 [5].

If IPv6 is supported, the EFTF shall support acting as router according to IETF RFC 2460 [7].

6.3 Inner IP address assignment procedure

6.3.1 UE procedures

If the UE has a network interface with a universally administered MAC address, the UE shall use a universally administered MAC address of a network interface of the UE as the UE FTT-IMS MAC address. If the UE does not have a network interface with a universally administered MAC address, the UE shall use a locally administered MAC address where the least significant bit of the last octet is set to zero as the UE FTT-IMS MAC address.

If IPv4 is supported, the UE shall support acting as DHCPv4 client according to IETF RFC 2131 [6].

If IPv6 is supported, the UE shall support acting as host supporting the IPv6 stateless address autoconfiguration according to IETF RFC 4862 [11].

Once the FTT-IMS is established, the UE shall:

- 1) if the UE needs IPv4 connectivity, request IPv4 address using DHCPv4 according to IETF RFC 2131 [6]. The UE shall use the htype, hlen, chaddr according to the UE FTT-IMS MAC address; and
- 2) if the UE needs IPv6 connectivity, generate IPv6 address using IPv6 stateless address autoconfiguration according to IETF RFC 4862 [11]. The UE shall create a link-local address according to IETF RFC 4291 [10] using the UE FTT-IMS MAC address.

NOTE 1: Further IPv6 configuration can be done using stateless DHCPv6 according to IETF RFC 3736 [9].

NOTE 2: DHCPv4 uses IPv4 as transport; IPv6 stateless address autoconfiguration uses IPv6 as transport and DHCPv6 uses IPv6 as transport. Thus, the DHCPv4 messages, IPv6 stateless address autoconfiguration messages and DHCPv6 messages are transported via the FTT-IMS using the IP packet transport FTT-IMS procedure according to subclause 5.3.

6.3.2 EFTF procedures

If IPv4 is supported, the EFTF shall support acting as DHCPv4 server according to IETF RFC 2131 [6]. When acting as DHCPv4 server, the EFTF shall handle each existing FTT-IMS as a different subnet.

If the EFTF has a network interface with a universally administered MAC address, the EFTF shall use a universally administered MAC address of a network interface of the EFTF as the EFTF FTT-IMS MAC address. If the EFTF does not have a network interface with a universally administered MAC address, the EFTF shall use a locally administered MAC address where the least significant bit of the last octet is set to one as the EFTF FTT-IMS MAC address.

If IPv6 is supported, the EFTF shall support acting as router supporting the IPv6 stateless address autoconfiguration according to IETF RFC 4862 [11]. The EFTF shall create a link-local address according to IETF RFC 4291 [10] using the EFTF FTT-IMS MAC address.

7 PDUs and parameters

7.1 PDUs and parameters specific to FTT-IMS protocol

7.1.1 General

The least significant bit of a field is represented by the lowest numbered bit of the highest numbered octet of the field. When the field extends over more than one octet, the order of bit values progressively decreases as the octet number increases.

Figure 7.1.1-1 shows an example of a field where the most significant bit of the field is marked MSB and the least significant bit of the field is marked LSB.

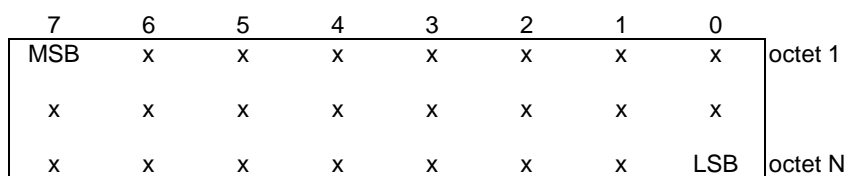


Figure 7.1.1-1: Example of bit ordering of a field

7.1.2 Message types of FTT-IMS messages

7.1.2.1 Generic FTT-IMS envelope

Generic FTT-IMS envelope defines structure of messages passed via FTT-IMS.

Generic FTT-IMS envelope is coded according to figure 7.1.2.1-1 and table 7.1.2.1-1.



Figure 7.1.2.1-1: Generic FTT-IMS envelope

Table 7.1.2.1-1: Generic FTT-IMS envelope

Type field indicates the envelope type.
Length field indicates the length of the generic FTT-IMS envelope in octets.
Payload field is an optional field and its value depends on the envelope type.

7.1.2.2 IP packet envelope

IP packet envelope is coded according to figure 7.1.2.2-1 and table 7.1.2.2-1.

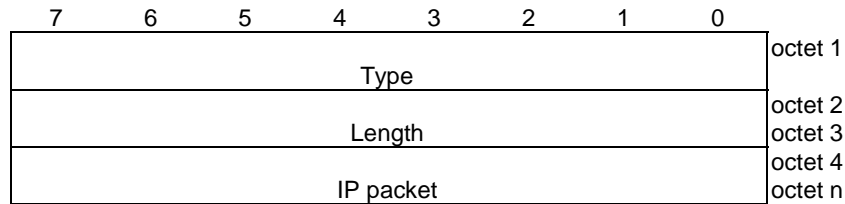


Figure 7.1.2.2-1: IP packet envelope

Table 7.1.2.2-1: IP packet envelope

Type field is according to subclause 7.1.2.1 and is set to 1.
Length field is according to subclause 7.1.2.1. The Length field value is bigger than 3.
IP packet field contains an IPv4 packet according to IETF RFC 791 [5] or IPv6 packet according to IETF RFC 2460 [7].

Annex A (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
2013-08	CT1#84	C1-133160			Skeleton of TS from rapporteur		0.0.0
2013-08	CT1#84	C1-133161 C1-133157			Incorporate agreed P-CRs from CT1#84	0.0.0	0.1.0
2013-10	CT1#84bis	C1-134105 C1-134445			Incorporate agreed P-CRs from CT1#84bis	0.1.0	0.2.0
2013-12	CT-62	CP-130718			Version 1.0.0 created for presentation to CT62 for information	0.2.0	1.0.0
2014-01	CT1#86	C1-140019			Minor corrections	1.0.0	1.1.0
2014-02	CT-63	CP-140111			Version 2.0.0 created for presentation to CT-63 for approval	1.1.0	2.0.0
2014-03	Post CT-63				Version 12.0.0 created after approval at CT-63	2.0.0	12.0.0
2014-06	CT-64	CP-140332	0001		Editorial corrections	12.0.0	12.1.0
2015-06	CT-68	CP-150329	0002		Aligning TLS profiles used by CT1 specifications with SA3 agreed TLS profile	12.1.0	13.0.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2017-03	CT-75					Upgrade to Rel-14	14.0.0
2018-06	SA-80	-	-	-		Update to Rel-15 version (MCC)	15.0.0
2020-07	SA-88e	-	-	-		Update to Rel-16 version (MCC)	16.0.0
2022-03	CT-95e-	-	-	-	-	Update to Rel-17 version (MCC)	17.0.0

History

Document history		
V17.0.0	April 2022	Publication