ETSI TS 124 571 V17.1.0 (2022-05)



5G; 5G System (5GS); Control plane Location Services (LCS) procedures; Stage 3 (3GPP TS 24.571 version 17.1.0 Release 17)



Reference RTS/TSGC-0124571vh10 Keywords 5G

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from: http://www.etsi.org/standards-search

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx

If you find errors in the present document, please send your comment to one of the following services: https://portal.etsi.org/People/CommiteeSupportStaff.aspx

If you find a security vulnerability in the present document, please report it through our Coordinated Vulnerability Disclosure Program:

https://www.etsi.org/standards/coordinated-vulnerability-disclosure

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022. All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECTTM, **PLUGTESTS**TM, **UMTS**TM and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP**TM and **LTE**TM are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M**TM logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM**[®] and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the <u>ETSI Drafting Rules</u> (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

Contents

Intelle	ectual Property Rights	2
Legal	Notice	2
Moda	l verbs terminology	2
Forew	vord	5
1	Scope	7
2	References	7
	Definitions of terms, symbols and abbreviations	
3.1	Terms	7
3.2	Symbols	7
3.3	Abbreviations	7
4	General	8
4.1	Overview	8
4.1.1	NAS aspect	8
4.1.2	LCS aspect	
4.2	LCS Support capabilities	
4.2.1	UE support of LCS	
4.2.2	Network support of LCS	
	•	
5	Support of LCS signalling	
5.1	General	9
5.2	LCS operations	9
5.2.1	Network initiated location services operations	9
5.2.1.1	Supplementary Services Location Notification	9
5.2.1.1	**	
5.2.1.1		
5.2.1.2	±	
5.2.1.3		
5.2.1.3	** ** ** ** ** ** ** ** ** ** ** ** **	
5.2.1.3		
	1	
5.2.1.4		
5.2.1.4		
5.2.1.4	1	
5.2.2	Mobile initiated location services operations	
5.2.2.1		
5.2.2.1		
5.2.2.1	Normal operation	18
5.2.2.2	UE initiated Cancel Deferred Location	22
5.2.2.2	2.1 General	22
5.2.2.2	2.2 Normal operation	23
5.2.2.3	1	
5.2.2.4		
5.2.2.4		
5.2.2.4		
5.2.2.5	•	
5.2.2.5 5.2.2.5	· · ·	
5.2.2.5		28
5.2.2.6		
	MT-LR	
5.2.2.6		
5.2.2.6	1	
5.3	LCS message and coding	31
5.3.1	Messages for Location services operations	31
5.3.2	Messages for LTE Positioning Protocol (LPP)	
5.3.2.1		

5.3.2.2	Uplink Positioning Information Transport using LPP messages			
Annex A (info	rmative):	Change history	32	
History			33	

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

shall indicates a mandatory requirement to do somethingshall not indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

should indicates a recommendation to do something

should not indicates a recommendation not to do something

may indicates permission to do something

need not indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

can indicates that something is possiblecannot indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

will indicates that something is certain or expected to happen as a result of action taken by an agency

the behaviour of which is outside the scope of the present document

will not indicates that something is certain or expected not to happen as a result of action taken by an

agency the behaviour of which is outside the scope of the present document

might indicates a likelihood that something will happen as a result of action taken by some agency the

behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency

the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document specifies the operations and information coding for the Non-Access Stratum (NAS) layer protocol for supporting the Location Services (LCS) in the NG-RAN.

The present document is applicable to the User Equipment (UE) and to the Access and Mobility Management Function (AMF) or Location Management Function (LMF) in the 5G System (5GS).

The present document is developed in accordance to the general principles stated in 3GPP TS 23.273 [2].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.
- 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
 3GPP TS 23.273: "5G System (5GS) Location Services (LCS); Stage 2".
 3GPP TS 24.501: "Non-Access-Stratum (NAS) protocol for 5G System (5GS); Stage 3".
 3GPP TS 37.355: "LTE Positioning Protocol (LPP)".
 3GPP TS 24.080: "Mobile radio interface layer 3 supplementary services specification; Formats and coding".
 3GPP TS 29.572: "5G System; Location Management Services; Stage 3".

3 Definitions of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

3.2 Symbols

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

5GCN 5G Core Network 5GS 5G System

AMF Access and Mobility Management Function

DL Downlink

IE	Information Element		
C) 17 C	0 37111	-	

GMLC Gateway Mobile Location Centre

LCS Location Services

LDR Location Deferred Request
LMF Location Management Function
LPP LTE Positioning Protocol

MO-LR Mobile Originated Location Request MT-LR Mobile Terminated Location Request

NAS Non-access Stratum UE User Equipment

UL Uplink

4 General

4.1 Overview

4.1.1 NAS aspect

To enable transfer of Location Services (LCS) signaling messages between the 5G core network (5GCN) and the UE, two Payload container types are defined in the downlink (DL NAS TRANSPORT message) and the uplink (UL NAS TRANSPORT message or CONTROL PLANE SERVICE REQUEST message). The message protocol and procedures are described in 3GPP TS 24.501 [3].

4.1.2 LCS aspect

LCS uses the defined payload container to transfer LCS signalling messages between the UE and the network.

The corresponding LCS signaling messages include:

- a) LTE Positioning Protocol (LPP) messages (see 3GPP TS 37.355 [4])
 - Both downlink and uplink LPP messages are supported
 - Routing information is transported as the Additional information IE in UL/DL NAS TRANSPORT message for LPP messages (see 3GPP TS 24.501 [3])
- b) Location services messages
 - Messages for MO-LR operations (see 3GPP TS 24.080 [5])
 - Messages for LocationNotification operations (see 3GPP TS 24.080 [5])
 - Messages for EventReport operations (see 3GPP TS 24.080 [5])
 - Messages for PeriodicTriggeredInvoke operations (see 3GPP TS 24.080 [5])
 - Messages for CancelDeferredLocation operations (see 3GPP TS 24.080 [5])
 - Messages for MSCancelDeferredLocation operations (see 3GPP TS 24.080 [5])
 - Messages for LocationPrivacySetting operations (see 3GPP TS 24.080 [5])

Routing information associated with the LMF is transported as the Additional information IE in UL/DL NAS TRANSPORT message or CONTROL PLANE SERVICE REQUEST message (see clause 5.2.2.6.1) for Location services messages that are transported between the UE and the LMF (see 3GPP TS 24.501 [3])

The Routing information transported as the Additional Information IE can be Routing identifier in the current specification, which includes immediate routing identifier and deferred routing identifier. The immediate routing identifier transported as the Additional Information IE is the Correlation ID, which is allocated by the AMF and can be used in the UL/DL NAS TRANSPORT message (see clause 5.2 and clause 5.3). The deferred routing identifier

transported as the Additional Information IE can be used in the UL NAS TRANSPORT and CONTROL PLANE SERVICE REQUEST message for the AMF routing the LCS messages to the particular LMF (see clause 5.2.2).

4.2 LCS Support capabilities

4.2.1 UE support of LCS

The UE announces to the network its ability to support LCS notification mechanism or LPP messages or both, using the 5GMM capability IE defined in 3GPP TS 24.501 [3].

4.2.2 Network support of LCS

The network announces to the UE its ability to support LCS in 5GC using the 5GS network feature support IE defined in 3GPP TS 24.501 [3]. The information is taken into account by the UE, in addition to UE's LCS capabilities, for the UE to determine whether to initiate MO-LR procedure in NG-RAN as specified in 3GPP TS 23.273 [3], clause 6.2.

5 Support of LCS signalling

5.1 General

This clause defines the NG-RAN LCS operations (clause 5.2) and the format and coding of the messages (clause 5.3).

The messages defined in this clause can be transported in the UL/DL NAS Transport message defined in 3GPP TS 24.501 [3].

5.2 LCS operations

5.2.1 Network initiated location services operations

5.2.1.1 Supplementary Services Location Notification

5.2.1.1.1 General

The supplementary services Location Notification operation enables the AMF to trigger the end-user notification verification process on the UE using NAS signalling. The supplementary services messages are transported using the DL NAS Transport message and the UL NAS Transport message defined in 3GPP TS 24.501 [3]. UE Location Privacy Indication information may be included in Location Notification Return Result to indicate whether subsequent LCS requests will be allowed or disallowed by the UE. Figure 5.2.1.1.1.1 illustrates an example of the NAS signalling transport applicable to a 5GC-MT-LR procedure for immediate or deferred location.

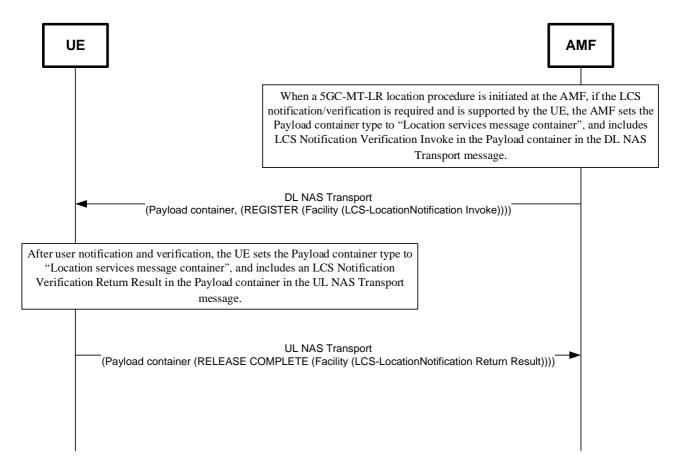


Figure 5.2.1.1.1: NAS signalling transport for Supplementary Services Location Notification

NOTE: The optional Additional Information IE of the DL/UL NAS Transport message is not used when the LCS Location Notification signalling is transported in the Payload container.

5.2.1.1.2 Normal operation

The network invokes a location notification procedure by sending a REGISTER message containing an LCS-LocationNotification invoke component to the UE as defined in 3GPP TS 24.080 [5]. This may be sent either to request verification for a 5GC-MT-LR or to notify the UE about an already authorized 5GC-MT-LR.

In case of privacy verification, the UE shall respond to the request by sending a RELEASE COMPLETE message containing the user's response and optionally UE Location Privacy Indication information in a return result component (see figure 5.2.1.1.2.1).

If the timer T(LCSN) defined in 3GPP TS 24.080 [5] expires in the network before any response from the UE (e.g. due to no response from the user), the network shall interpret this by applying the default treatment defined in 3GPP TS 23.273 [2] (i.e. disallow location if barred by subscription or allow location if allowed by subscription).

In the case of location notification, the UE shall terminate the dialogue immediately by sending a RELEASE COMPLETE message containing a LocationNotification return result.

If the UE is unable to process the request received from the network, it shall return an error indication by sending a RELEASE COMPLETE message containing a return error component. Error values are specified in 3GPP TS 24.080 [5].

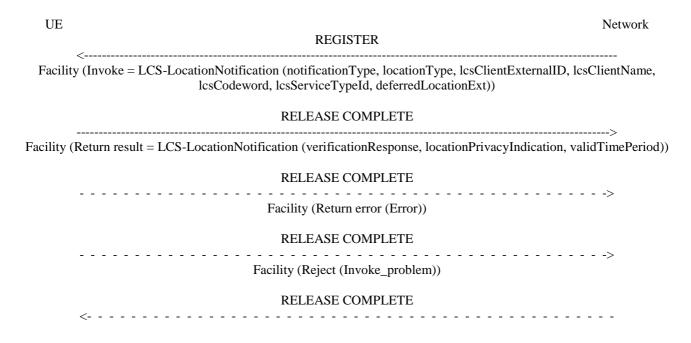


Figure 5.2.1.1.2.1: Location Notification

5.2.1.2 Positioning Information Transport

The AMF sends an LPP message and an associated Correlation Identifier in the DL NAS Transport message (refer to 3GPP TS 24.501 [3] and 3GPP TS 23.273 [2] clause 6.11.1). Figure 5.2.1.2.1 illustrates an example of the NAS signalling transport for downlink LPP messages.

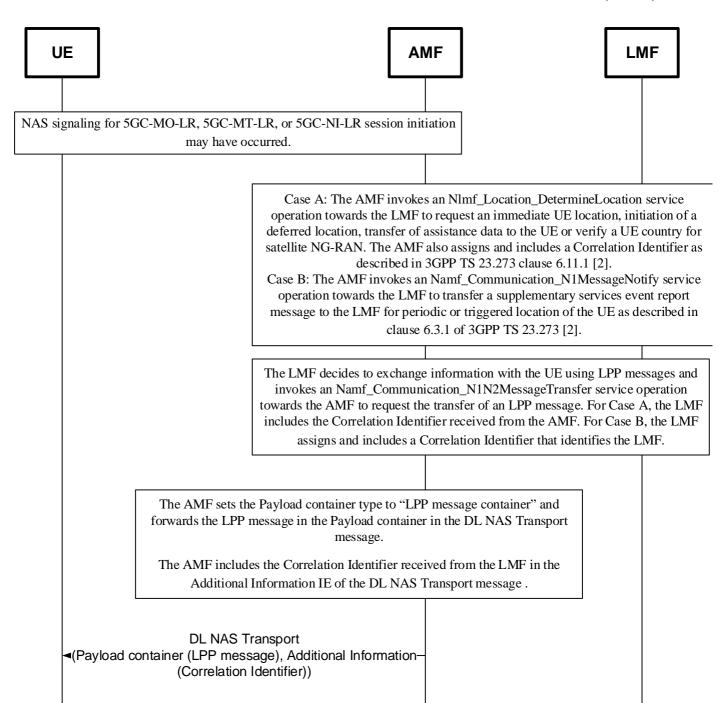


Figure 5.2.1.2.1: NAS signalling transport for downlink LPP messages

5.2.1.3 Supplementary Services Periodic or Triggered Location

5.2.1.3.1 General

The supplementary services LCS PeriodicTriggered Invoke operation enables the LMF to initiate periodic or triggered location event reporting by a target UE as described in clause 6.3.1 of 3GPP TS 23.272 [2]. The supplementary services LCS PeriodicTriggered Invoke message is transferred to the target UE via the serving AMF in a DL NAS Transport message. A response from the target UE is similarly returned to the LMF via the serving AMF and is transferred to the AMF in an UL NAS Transport message. If the LCS PeriodicTriggered Invoke message in the Payload container IE of a DL NAS TRANSPORT message includes the deferred routing identifier, the UE shall include the deferred routing identifier in the Additional Information IE of a UL NAS TRANSPORT message during the subsequent procedures as specified in clause 5.2.2.

Figure 5.2.1.3.1.1 illustrates an example of the NAS signalling transport for initiation of periodic or triggered location,

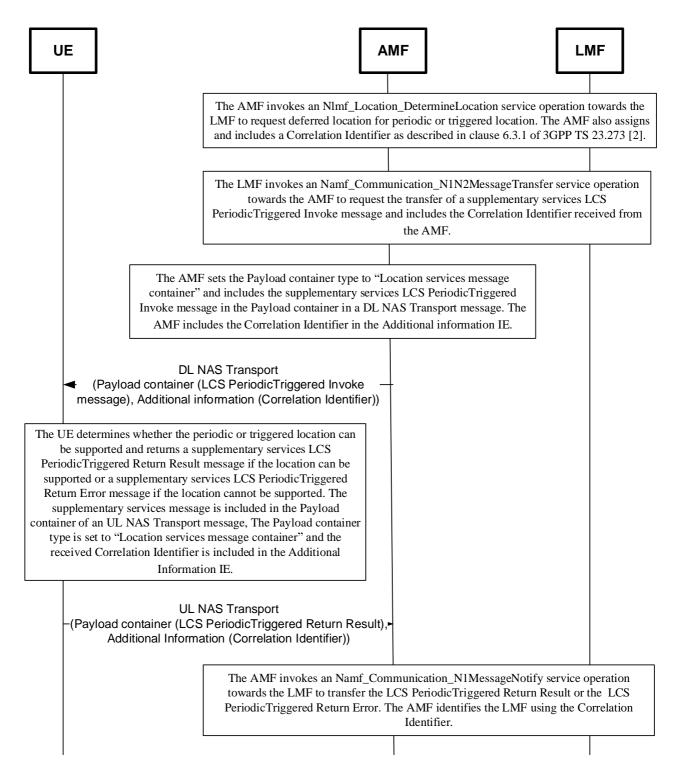


Figure 5.2.1.3.1.1: NAS signalling transport for LCS PeriodicTriggered messages

5.2.1.3.2 Normal operation

The LMF sends a REGISTER message to the UE containing the supplementary services LCS PeriodicTriggered Invoke component as defined in 3GPP TS 24.080 [5]. The REGISTER message is transported to the UE via the serving AMF as described in figure 5.2.1.3.1.1.

If the UE can support the periodic or triggered location, the UE returns a RELEASE COMPLETE message to the LMF containing an LCS PeriodicTriggered return result. The RELEASE COMPLETE message is transported to the LMF via the serving AMF as described in figure 5.2.1.3.1.1.

If the UE is unable to process or support the request received from the network, it shall return an error indication by sending a RELEASE COMPLETE message containing a return error component or reject component. Error values are specified in 3GPP TS 24.080 [5].

Figure 5.2.1.3.2.1 illustrates the signalling for normal operation between the UE and the network.

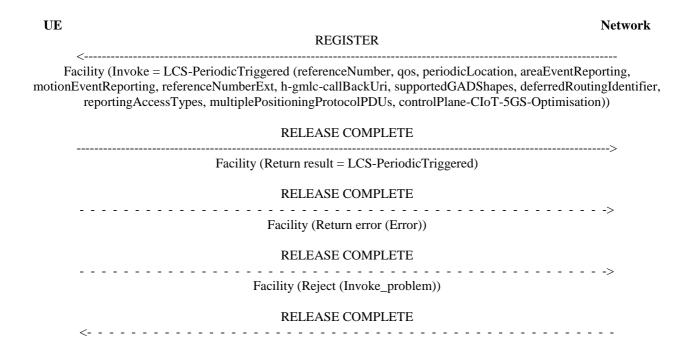


Figure 5.2.1.3.2.1: Periodic or Triggered Location Invocation

5.2.1.4 Supplementary Services Cancel Deferred Location

5.2.1.4.1 General

The supplementary services Cancel Deferred Location operation enables the AMF to cancel ongoing periodic or triggered location in a target UE using NAS signalling as described in 3GPP TS 23.273 [2] clause 6.3.3. The supplementary services Cancel Deferred Location messages are transported using the DL NAS Transport message and the UL NAS Transport message defined in 3GPP TS 24.501 [3]. Figure 5.2.1.4.1-1 illustrates an example of the NAS signalling transport.

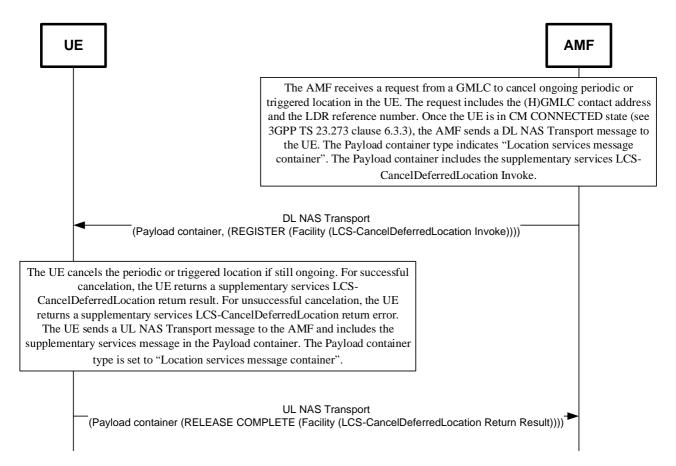


Figure 5.2.1.4.1.1: NAS signalling transport for Cancel Deferred Location

NOTE: The optional Additional Information IE of the DL/UL NAS Transport message is not used when the LCS CancelDeferredLocation signalling is transported in the Payload container.

5.2.1.4.2 Normal operation

The AMF invokes a cancel deferred location procedure by sending a REGISTER message containing an LCS-CancelDeferredLocation invoke component to the UE as defined in 3GPP TS 24.080 [5].

The UE shall terminate the ongoing periodic or triggered location if this can be identified from the information in the LCS-CancelDeferredLocation invoke component.

The UE shall then return a RELEASE COMPLETE message containing an LCS-CancelDeferredLocation return result component (see figure 5.2.1.4.2.1).

If the UE is unable to process the request received from the network or cannot identify the ongoing periodic or triggered location to be terminated, it shall return an error indication by sending a RELEASE COMPLETE message containing a return error component. Error values are specified in 3GPP TS 24.080 [5].

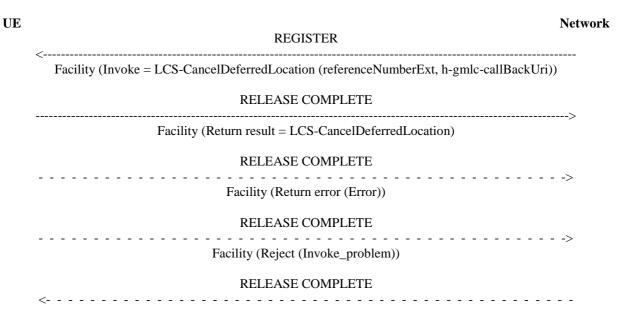


Figure 5.2.1.4.2.1: Cancel Deferred Location

5.2.2 Mobile initiated location services operations

5.2.2.1 Mobile Originiated Location Request(MO-LR)

5.2.2.1.1 General

The supplementary services MO-LR operation enables the UE to launch MO positioning session or request location assistance data using NAS signaling. The NAS signaling are transported using the DL NAS Transport message and the Uplink NAS Transport message defined in 3GPP TS 24.501 [3]. Figure 5.2.2.1.1-1 illustrates an example of the NAS signaling transport for an MO-LR session.

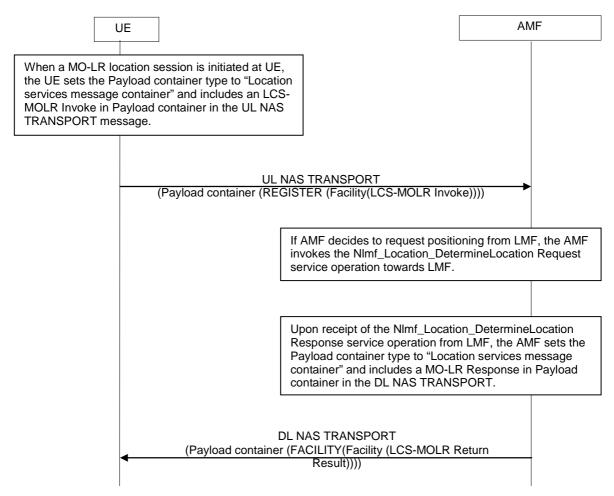


Figure 5.2.2.1.1-1: NAS signaling transport for MO-LR

NOTE: The optional Additional Information IE of the UL/DL NAS TRANSPORT message is not used when the MO-LR signaling is transported in the Payload container.

5.2.2.1.2 Normal operation

The UE invokes a MO-LR by sending a REGISTER message to the network containing a LCS-MOLR invoke component. SS Version Indicator value 1 or above shall be used.

The receiving network entity shall initiate the handling of location request in the network. The network shall pass the result of the location procedure to the UE by sending a FACILITY message to the UE containing a LCS-MOLR return result component. When location estimate is kept in the network entity and this information satisfies the requested accuracy and the requested maximum age of location, then the network may reuse this information and the positioning measurement procedure may be skipped.


The network shall pass the result of the location procedure to the UE only if the location estimate is given in a format that the UE supports, as indicated by either the presence (and content) or the absence of the parameter supportedGADShapes, which may be sent by the UE in the LCS-MOLR operation.

The UE may terminate the dialogue by sending a RELEASE COMPLETE message in the case of single location request (see figure 5.2.2.1.1-1). The UE may also initiate another location request operation by sending a FACILITY message to the network containing a LCS-MOLR invoke component (see figure 5.2.2.1.1-2). After the last location request operation the UE shall terminate the dialogue by sending a RELEASE COMPLETE message.

If the network is unable to successfully fulfil the request received from the UE (e.g. to provide a location estimate or location assistance information), it shall clear the transaction by sending a RELEASE COMPLETE message containing a return error component. Error values are specified in 3GPP TS 24.080 [5]. If the network is unable to provide a location estimate due to lack of support in the UE for the type of shape of the location estimate, then it shall use the error Facility Not Supported.

If the network has returned a result to the UE in a FACILITY message but, after some PLMN administered time period has elapsed, has not received either a new location request operation in a FACILITY message or a RELEASE COMPLETE message from the UE, the network may clear the transaction by sending a RELEASE COMPLETE message.

During the MO-LR operation the UE shall run a timer T(LCSL). This timer is started when the operation is sent, and stopped when a response is received from the network. If this timer expires the UE shall assume that the operation has failed, and may terminate the dialogue by sending a RELEASE COMPLETE message, and shall inform the user of the failure.

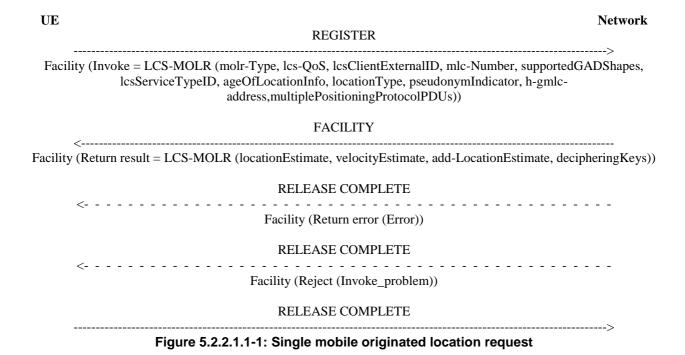

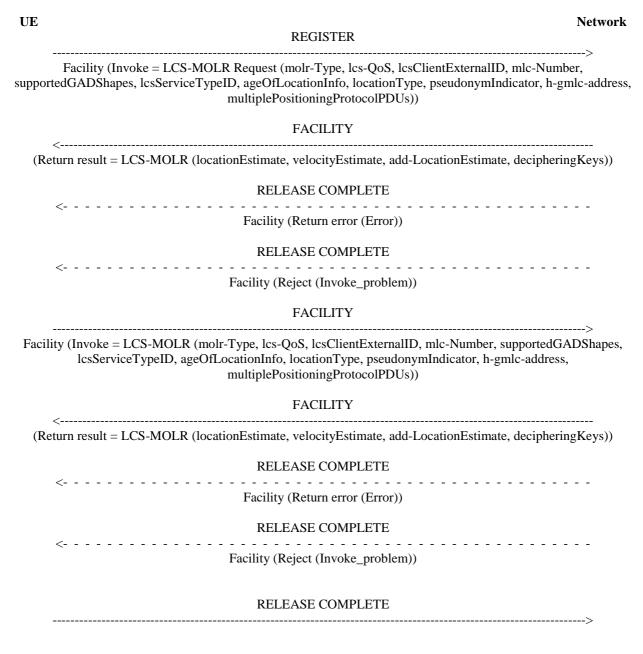


Figure 5.2.2.1.1-2: Multiple mobile originated location requests

NOTE 1: Only the following IEs defined in MO-LR operations in 3GPP TS 24.080 [5] are used for NG-RAN LCS:

- molr-Type
- lcs-QoS
- lcsServiceTypeID
- ageOfLocationInformation
- locationType
- mlc-Number
- lcsClientExternalID
- pseudonymIndicator
- supportedGADShapes

- multiplePositioningProtocolPDUs
- locationEstimate
- h-gmlc-address
- decipheringKeys

NOTE 2: multiplePositioningProtocolPDUs IE is added to the MO-LR Request to allow for passing multiple UE positioning information LPP messages (e.g. UE location measurements or UE capabilities) to the LMF for NG-RAN LCS. Its ASN.1 description is given in 3GPP TS 24.080 [5], where the maximum number of LPP messages is specified. There is one or more types of multiple LPP messages can be encapsulated in one multiplePositioningProtocolPDUs IE.

5.2.2.2 UE initiated Cancel Deferred Location

5.2.2.2.1 General

The supplementary services MSCancelDeferredLocation operation enables the UE to cancel ongoing periodic or triggered location in a target LMF using NAS signalling as described in 3GPP TS 23.273 clause 6.3.3 [2]. The supplementary services MCancelDeferredLocation messages are transported using the UL NAS TRANSPORT message and the DL NAS TRANSPORT message defined in 3GPP TS 24.501 [3]. The deferred routing identifier in the Additional information IE of the UL NAS TRANSPORT message for the cancellation of periodic or triggered location event reporting can be an LMF ID.

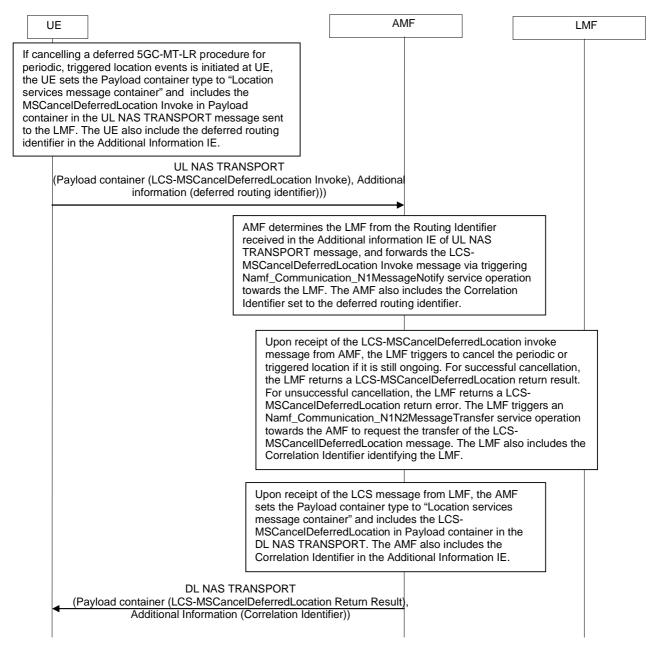


Figure 5.2.2.2.1-1: NAS signaling transport for UE initiated Cancel Deferred Location

5.2.2.2.2 Normal operation

The UE invokes a cancel deferred location procedure by sending a REGISTER message containing a LCS-MSCancelDeferredLocation invoke component to the LMF as defined in 3GPP TS 24.080 [5].

The LMF shall terminate the ongoing periodic or triggered location if this can be identified from the information in the LCS-MSCancelDeferredLocation invoke component.

The LMF shall then return a RELEASE COMPLETE message containing an LCS-MSCancelDeferredLocation return result component (see Figure 5.2.2.2.2-1).

If the LMF is unable to process the request received from the UE or can not identify the ongoing periodic or triggered location to be terminated, it shall return an error indication by sending a RELEASE COMPLETE message containing a return error component. Error values are specified in 3GPP TS 24.080 [5].

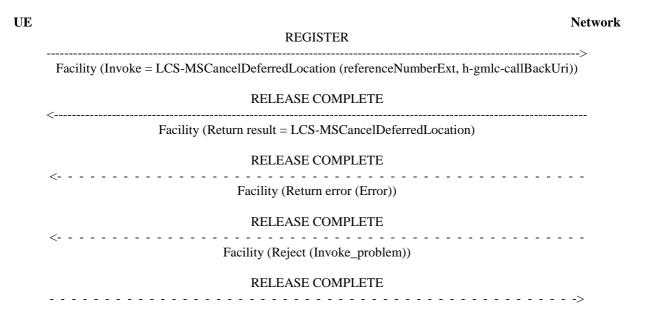


Figure 5.2.2.2-1: Cancel Deferred Location

NOTE: Only the following IEs defined in MSCancelDeferredLocation operations in 3GPP TS 24.080 [5] are used for NG-RAN LCS:

- referenceNumberExt
- h-gmlc-callBackUri

5.2.2.3 UE initiated Positioning Information Transport

The UE sends LPP message and the associated Routing identifier in the UL NAS Transport message (refer to 3GPP TS 24.501 [3] and 3GPP TS 23.273 [2] clause 6.11.1). Figure 5.2.2.3-1 illustrates an example of the NAS signalling transport for uplink LPP messages.

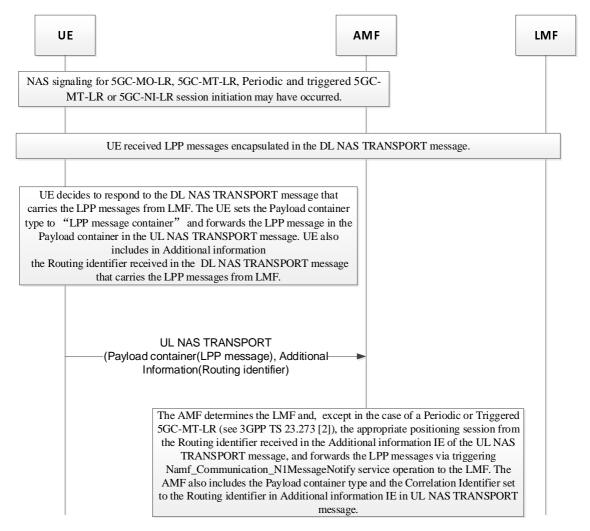


Figure 5.2.2.3-1: NAS signalling transport for uplink LPP messages

5.2.2.4 UE initiated Event Reporting Procedure

5.2.2.4.1 General

The supplementary services EventReport operation enables the UE to report the periodic or triggered location event invoked by the LMF via LCS PeriodicTriggered Invoke operation as described in clause 6.3.1 of 3GPP TS 23.273 [2] when some certain events are detected in the UE. The supplementary services EventReport message is transferred to the LMF via the serving AMF in a UL NAS TRANSPORT message defined in 3GPP TS 24.501 [3]. A response from the LMF may be returned to the UE via the serving AMF and be transferred to the UE in a DL NAS TRANSPORT message. The deferred routing identifier in the Additional information IE of the UL NAS TRANSPORT for reporting the periodic or triggered location event can be an LMF ID. If the serving LMF is changed, the deferred routing identifier may be included in the EventReport Acknowledgement message (refer to clause 6.3.1 of 3GPP TS 23.273 [2]).

Figure 5.2.2.4.1-1 illustrates an example of the NAS signalling transport for EventReport messages,

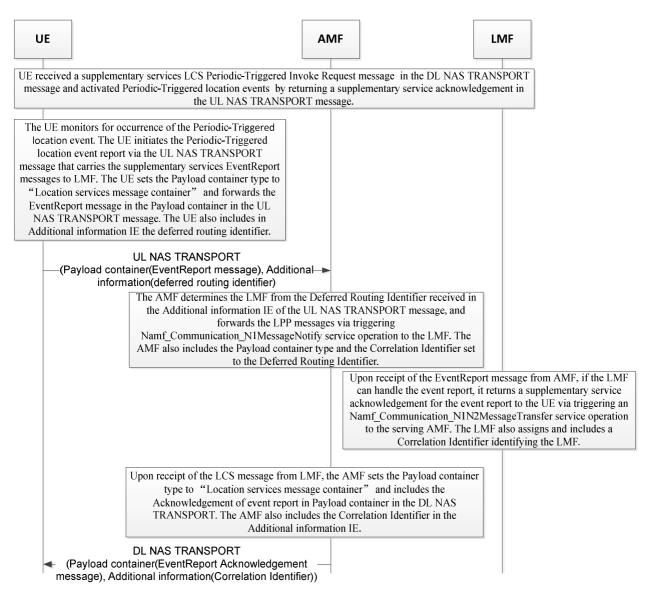


Figure 5.2.2.4.1-1: NAS signalling transport for EventReport messages

5.2.2.4.2 Normal operation

The UE invokes an EventReport procedure by sending a REGISTER message containing an EventReport component to the LMF as defined in 3GPP TS 24.080 [5].

The LMF shall return a supplementary services acknowledgement of event report if it can handle this event report.

The LMF shall then return a RELEASE COMPLETE message containing an EventReport Acknowledge component (see Figure 5.2.2.4.2-1).

If the LMF is unable to process the request received from the UE or can not identify the ongoing periodic or triggered location to be terminated, it shall return an error indication by sending a RELEASE COMPLETE message containing a return error component. Error values are specified in 3GPP TS 24.080 [5].



Figure 5.2.2.4.2-1: EventReport

NOTE: Only the following IEs defined in EventReport operations in 3GPP TS 24.080 [5] are used for NG-RAN LCS:

- eventType
- referenceNumberExt
- h-gmlc-callBackUri
- lcs-QoS
- locationInfo
- supportedGADShapes
- multiplePositioningProtocolPDUs
- terminationCause

5.2.2.5 UE Location Privacy Setting Procedure

5.2.2.5.1 General

The supplmentary services LocationPrivacySetting operation enables the UE to update the UE Location Privacy Indication information via UE Location Privacy Setting procedure as described in clause 6.12.1 of 3GPP TS 23.273 [2] when the UE has generated or updated the UE Location Privacy Indication. The supplementary services LocationPrivacySetting message is transferred to the serving AMF in a UL NAS TRANSPORT message and an acknowledgement from the serving AMF may be returned to the UE in DL NAS TRANSPORT message defined in 3GPP TS 24.501 [3].

Figure 5.2.2.5.1-1 illustrates an example of the NAS signalling transport for UE Location Privacy Setting procedure,

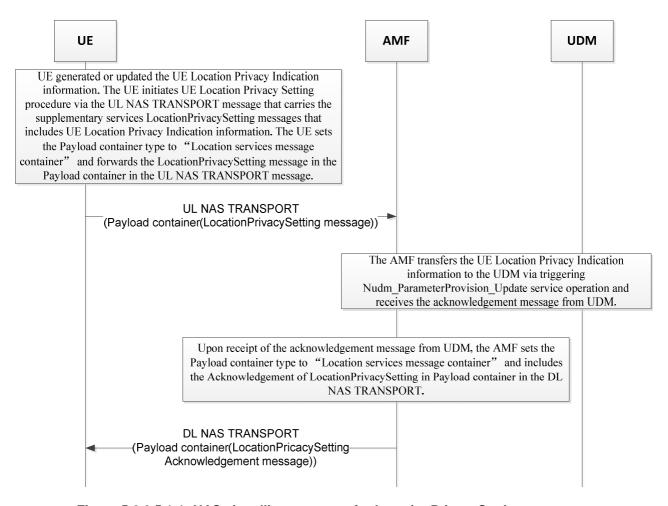


Figure 5.2.2.5.1-1: NAS signalling transport for LocationPrivacySetting messages

5.2.2.5.2 Normal operation

The UE invokes a Location Privacy Setting procedure by sending a REGISTER message containing an LocationPrivacySetting message as defined in 3GPP TS 24.080 [5]. UE's Location Privacy Indication information is included in LocationPrivacySetting message.

The AMF shall transfers the UE Location Privacy Indication information in LocationPrivacySetting message to UDM and response a supplementary services acknowledgement of LocationPrivacyIndication message

The AMF shall then return a RELEASE COMPLETE message containing a LocationPrivacySetting Acknowledgement component (see figure 5.2.2.5.2-1) if it can handle this LocationPrivacySetting message correctly.

If the AMF is unable to process the request received from the UE or can not identify that provisioning the parameters of UE Location Privacy Setting information to UDM is executed successfully, it shall return an error indication by sending a RELEASE COMPLETE message containing a return error component. Error values are specified in 3GPP TS 24.080 [5].

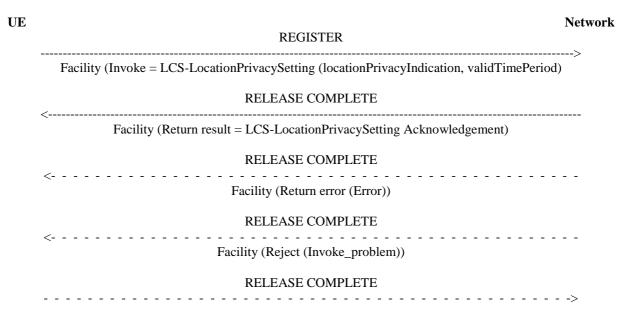


Figure 5.2.2.5.2-1: LocationPrivacySetting

NOTE: Only the following IEs defined in LocationPrivacySetting operations in 3GPP TS 24.080 [5] are used for NG-RAN LCS:

- locationPrivacyIndication
- validTimePeriod

5.2.2.6 UE initiated Event Reporting Procedure for Low Power Event Reporting and Triggered 5GC-MT-LR

5.2.2.6.1 General

The supplementary services EventReport operation enables the UE to report the periodic or triggered location event invoked by the LMF via LCS PeriodicTriggered Invoke operation as described in clause 6.7.1 of 3GPP TS 23.273 [2] when certain events are detected in the UE and when the UE supports and the LMF allows the use of Control Plane CIoT 5GS Optimisation. The supplementary services EventReport message is transferred to the LMF via the serving AMF in a CONTROL PLANE SERVICE REQUEST message defined in 3GPP TS 24.501 [3]. A response from the LMF may be returned to the UE via the serving AMF and be transferred to the UE in a DL NAS TRANSPORT message defined in 3GPP TS 24.501 [3]. The deferred routing identifier in the Additional information IE of the CONTROL PLANE SERVICE REQUEST message for reporting the periodic or triggered location event can be an LMF ID. If the serving LMF is changed, the deferred routing identifier may be included in the EventReport Acknowledgement message (refer to clause 6.3.1 of 3GPP TS 23.273 [2]).

Figure 5.2.2.x.1-1 illustrates an example of the NAS signalling transport for EventReport messages,

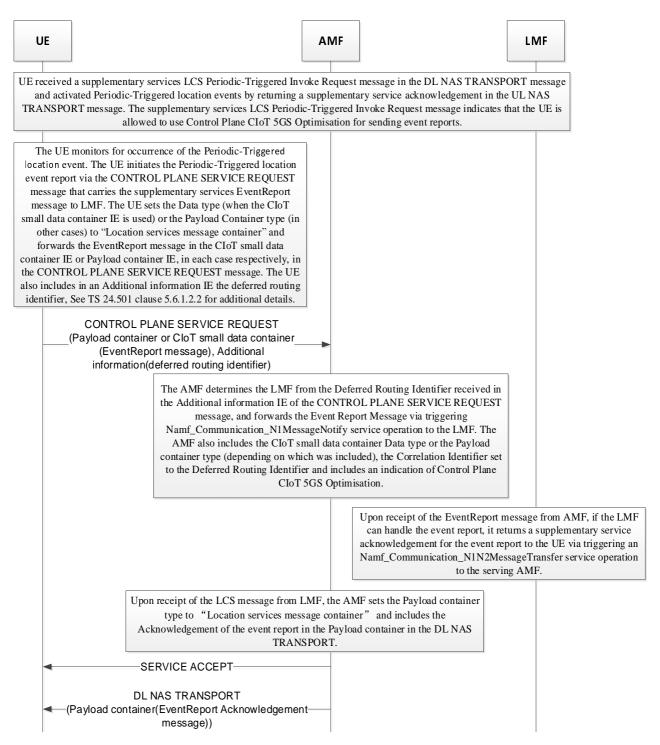


Figure 5.2.2.6.1-1: NAS signalling transport for EventReport messages using Low Power Event Reporting and Triggered 5GC-MT-LR

5.2.2.6.2 Normal operation

Normal operation is as described for the UE initiated Event Reporting Procedure in clause 5.2.2.4.2.

5.3 LCS message and coding

5.3.1 Messages for Location services operations

The LCS message format and information elements coding for the MO-LR, LocationNotification, EventReport, PeriodicTriggeredInvoke, CancelDeferredLocation and LocationPrivacySetting operations (clause 5.2) are defined in 3GPP TS 24.080 [5] for the following messages:

- Register message
- Facility message
- Release Complete message

5.3.2 Messages for LTE Positioning Protocol (LPP)

5.3.2.1 Downlink Positioning Information Transport using LPP messages

The AMF shall set the Payload container type to "LPP message container" in the DL NAS TRANSPORT message.

The AMF includes a Routing identifier in the Additional information IE of the DL NAS TRANSPORT message which identifies the LMF and the positioning session between the AMF and LMF when a positioning session is being used.

The Routing identifier is the Correlation ID, which is defined in 3GPP TS 29.572 [6], so that the AMF can map the Routing identifier to the LMF and the Correlation identifier when the AMF receives a UL NAS TRANSPORT message including the responding LPP message.

5.3.2.2 Uplink Positioning Information Transport using LPP messages

The UE shall set the Payload container type to "LPP message container" in the UL NAS TRANSPORT message.

The UE includes a Routing identifier received in the Additional Information IE of the DL NAS TRANSPORT message in the Additional Information IE of the UL NAS TRANSPORT message. This association of the Routing Identifier is provided at the LPP level: the UL NAS TRANSPORT message carries an LPP message that is a response to or instigated by the LPP message in the DL NAS TRANSPORT message. The Routing identifier is the Correlation ID, which is defined in 3GPP TS 29.572 [6], so that the AMF can map the Routing identifier to the Correlation identifier when the AMF receives the UL NAS TRANSPORT message.

Annex A (informative): Change history

	Change history						
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New
							version
2019-08	CT1#119					Draft skeleton provided by the rapporteur	0.0.0
2019-10	CT1#120					Includes the following contribution agreed by CT1 at CT1#120:C1-196563	0.1.0
2019-11	CT1#121					Includes the following contributions agreed by CT1 at CT1#121:C1-198290, C1-198720	0.2.0
2019-12	CT#86	CP-193155				Presentation for information to TSG CT	1.0.0
2020-03	CT#87e	CP-200287				Implementation of pCRs CP-200102 and 103 approved by TSG CT. Presentation for approval to TSG CT.	2.0.0
2020-03	CT#87e					Version 16.0.0 created after approval	16.0.0
2020-03	CT#87e					Editorial corrections	16.0.1
2020-06	CT#88e	CP-201098	0001		В	Adding Location Privacy Setting operation	16.1.0
2020-09	CT#89e	CP-202148	0002	3	В	UE initiated Event Reporting Procedure for Low Power Event Reporting	16.2.0
2020-09	CT#89e	CP-202148	0003		F	Additional function of MO-LR procedure	16.2.0
2021-12	CT#84e	CP-213031	0004	1	F	TS reference update and multiplePositioningProtocolPDUs limit clarification	17.0.0
2022-03	CT#84e	CP-220243	0006	1	В	AMF LCS functionality for satellite access	17.1.0
2022-03	CT#84e	CP-220243	8000	1	F	Clarification on multiplePositioningProtocolPDUs IE	17.1.0
2022-03	CT#84e	CP-220243	0009	4	F	Clarification on the LMF ID	17.1.0
2022-03	CT#84e	CP-220243	0010	1	F	Clarification on Routing information	17.1.0

History

Document history				
V17.1.0	May 2022	Publication		