

# ETSI TS 125 225 V3.1.1 (2000-01)

---

*Technical Specification*

## **Universal Mobile Telecommunications System (UMTS); Physical layer - Measurements (TDD) (3G TS 25.225 version 3.1.1 Release 1999)**



Reference

---

DTS/TSGR-0125225U

Keywords

---

UMTS

**ETSI**

Postal address

---

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

---

650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCE  
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16  
Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

---

secretariat@etsi.fr  
Individual copies of this ETSI deliverable  
can be downloaded from  
<http://www.etsi.org>  
If you find errors in the present document, send your  
comment to: editor@etsi.fr

---

**Important notice**

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.  
All rights reserved.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Specification (TS) has been produced by the ETSI 3<sup>rd</sup> Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables. The mapping of document identities is as follows:

For 3GPP documents:

3G TS | TR nn.nnn "<title>" (with or without the prefix 3G)

is equivalent to

ETSI TS | TR 1nn nnn "[Digital cellular telecommunications system (Phase 2+) (GSM);] Universal Mobile Telecommunications System; <title>

For GSM document identities of type "GSM xx.yy", e.g. GSM 01.04, the corresponding ETSI document identity may be found in the Cross Reference List on [www.etsi.org/key](http://www.etsi.org/key)

# Contents

Foreword .....	4
1 Scope.....	5
2 References.....	5
3 Abbreviations.....	5
4 Control of UE/UTRAN measurements.....	6
4.1 General measurement concept.....	6
4.2 Measurements for cell selection/reselection.....	6
4.3 Measurements for Handover.....	6
4.4 Measurements for DCA.....	7
4.5 Measurements for timing advance.....	7
5 Measurement abilities for UTRA TDD .....	7
5.1 UE measurement abilities .....	7
5.1.1 P-CCPCH RSCP .....	7
5.1.2 CPICH RSCP .....	8
5.1.3 RSCP.....	8
5.1.4 Timeslot ISCP .....	8
5.1.5 UTRA carrier RSSI.....	9
5.1.6 GSM carrier RSSI .....	9
5.1.7 SIR .....	9
5.1.8 CPICH Ec/No.....	9
5.1.9 Physical channel BER .....	10
5.1.10 Transport channel BLER.....	10
5.1.11 UE transmitted power.....	10
5.1.12 SFN-SFN observed time difference .....	11
5.1.13 Observed time difference to GSM cell.....	11
5.2 UTRAN measurement abilities.....	12
5.2.1 RSCP.....	12
5.2.2 Timeslot ISCP .....	12
5.2.3 RSSI .....	12
5.2.4 SIR .....	13
5.2.5 Physical channel BER .....	13
5.2.6 Transport channel BLER.....	13
5.2.7 Transmitted carrier power .....	14
5.2.8 Transmitted code power .....	14
5.2.9 RX Timing Deviation.....	14
<b>Annex A (informative): Monitoring GSM from TDD: Calculation Results.....</b>	<b>15</b>
A.1 Low data rate traffic using 1 uplink and 1 downlink slot.....	15
A.1.1 Higher data rate traffic using more than 1 uplink and/or 1 downlink TDD timeslot.....	16
<b>Annex B (informative): Change history .....</b>	<b>18</b>
History.....	19

---

# Foreword

This Technical Specification has been produced by the 3GPP.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version 3.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 Indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the specification;

---

# 1 Scope

The present document contains the description and definition of the measurements done at the UE and network in TDD mode in order to support operation in idle mode and connected mode

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] 3G TS 25.211 "Physical channels and mapping of transport channels onto physical channels (FDD)"
- [2] 3G TS 25.212 "Multiplexing and channel coding (FDD)"
- [3] 3G TS 25.213 "Spreading and modulation (FDD)"
- [4] 3G TS 25.214 "Physical layer procedures (FDD)"
- [5] 3G TS 25.215 "Physical layer measurements (FDD)"
- [6] 3G TS 25.221 "Physical channels and mapping of transport channels onto physical channels (TDD)"
- [7] 3G TS 25.222 "Multiplexing and channel coding (TDD)"
- [8] 3G TS 25.223 "Spreading and modulation (TDD)"
- [9] 3G TS 25.224 "Physical layer procedures (TDD)"
- [10] 3G TS 25.301 "Radio Interface Protocol Architecture"
- [11] 3G TS 25.302 "Services provided by the Physical layer"
- [12] 3G TS 25.303 "UE functions and interlayer procedures in connected mode"
- [13] 3G TS 25.304 "UE procedures in idle mode"
- [14] 3G TS 25.331 "RRC Protocol Specification"
- [15] 3G TR 25.922 "Radio Resource Management Strategies"
- [16] 3G TR 25.923 "Report on Location Services (LCS)"

---

# 3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

BER	Bit Error Rate
BLER	Block Error Rate
DCH	Dedicated Channel
DPCH	Dedicated Physical Channel
Ec/No	Received energy per chip divided by the power density in the band

FACH	Forward Access Channel
ISCP	Interference Signal Code Power
P-CCPCH	Primary Common Control Physical Channel
PCH	Paging Channel
PRACH	Physical Random Access Channel
RACH	Random Access Channel
RSCP	Received Signal Code Power
RSSI	Received Signal Strength Indicator
S-CCPCH	Secondary Common Control Physical Channel
SCH	Synchronisation Channel
SIR	Signal-to-Interference Ratio
UE	User Equipment

---

## 4 Control of UE/UTRAN measurements

In this chapter the general measurement control concept of the higher layers is briefly described to provide an understanding on how L1 measurements are initiated and controlled by higher layers.

### 4.1 General measurement concept

L1 provides with the measurement specifications a toolbox of measurement abilities for the UE and the UTRAN. These measurements can be differentiated in different measurement types: intra-frequency, inter-frequency, inter-system, traffic volume, quality and internal measurements (see [14]).

In the L1 measurement specifications the measurements are distinguished between measurements in the UE (the messages will be described in the RRC Protocol) and measurements in the UTRAN (the messages will be described in the NBAP and the Frame Protocol).

To initiate a specific measurement the UTRAN transmits a ‘measurement control message’ to the UE including a measurement ID and type, a command (setup, modify, release), the measurement objects and quantity, the reporting quantities, criteria (periodical/event-triggered) and mode (acknowledged/unacknowledged), see [14].

When the reporting criteria is fulfilled the UE shall answer with a ‘measurement report message’ to the UTRAN including the measurement ID and the results.

In idle mode the measurement control message is broadcast in a System Information.

Intra-frequency reporting events, traffic volume reporting events and UE internal measurement reporting events described in [14] define events which trigger the UE to send a report to the UTRAN. This defines a toolbox from which the UTRAN can choose the needed reporting events.

### 4.2 Measurements for cell selection/reselection

Whenever a PLMN has been selected the UE shall start to find a suitable cell to camp on, this is ‘cell selection’.

When camped on cell the UE regularly searches for a better cell depending on the cell reselection criteria, this is called ‘cell reselection’. The procedures for cell selection and reselection are described in [13] and the measurements carried out by the UE are explained in this specification.

### 4.3 Measurements for Handover

For the handover preparation the UE receives from the UTRAN a list of cells (e.g. TDD, FDD or GSM). which the UE shall monitor (see ‘monitored set’ in [14]) in its idle timeslots.

At the beginning of the measurement process the UE shall find synchronization to the cell to measure using the synchronization channel. This is described under ‘cell search’ in [9] if the monitored cell is a TDD cell and in [4] if it is an FDD cell.

For a TDD cell to monitor after this procedure the exact timing of the midamble of the P-CCPCH is known and the measurements can be performed. Depending on the UE implementation and if timing information about the cell to monitor is available, the UE may perform the measurements on the P-CCPCH directly without prior SCH synchronisation.

## 4.4 Measurements for DCA

DCA is used to optimise the resource allocation by means of a channel quality criteria or traffic parameters. The DCA measurements are configured by the UTRAN. The UE reports the measurements to the UTRAN.

For DCA no measurements are performed in idle mode in the serving TDD cell.

When connecting with the initial access the UE immediately starts measuring the ISCP of time slots which are communicated on the BCH. The measurements and the preprocessing are done while the UTRAN assigns an UL channel for the UE for signalling and measurement reporting.

In connected mode the UE performs measurements according to a measurement control message from the UTRAN.

## 4.5 Measurements for timing advance

To update timing advance of a moving UE the UTRAN measures 'Received Timing Deviation', i.e. the time difference of the received UL transmission (PRACH, DPCH, PUSCH) in relation to its timeslot structure that means in relation to the ideal case where an UL transmission would have zero propagation delay. The measurements are reported to higher layers, where timing advance values are calculated and signalled to the UE.

---

# 5 Measurement abilities for UTRA TDD

In this chapter the physical layer measurements reported to higher layers. (this may also include UE internal measurements not reported over the air-interface) are defined.

## 5.1 UE measurement abilities

NOTE 1: Measurements for TDD which are specified on the Primary CCPCH (P-CCPCH) are carried out on the P-CCPCH or other physical channels with beacon function, see [6].

NOTE 2: For those channels providing beacon function [6], the received power measurements are based on the sum of the received powers for midambles  $m^{(1)}$  and  $m^{(2)}$ .

NOTE 3: The UTRAN has to take into account the UE capabilities when specifying the timeslots to be measured in the measurement control message.

NOTE 4: The RSCP can either be measured on the data part or the midamble of a burst, since there is no power offset between both. However, in order to have a common reference, the measurement on the midamble is assumed.

NOTE 5: The line 'applicable for' indicates whether the measurement is applicable for inter-frequency and/or intra-frequency and furthermore for idle and/or connected mode.

### 5.1.1 P-CCPCH RSCP

<b>Definition</b>	Received Signal Code Power, the received power on P-CCPCH of own or neighbour cell after despreading. The reference point for the RSCP is the antenna connector at the UE.																					
<b>Applicable for</b>	idle mode, connected mode (intra-frequency & inter-frequency)																					
<b>Range/mapping</b>	<p>P-CCPCH RSCP is given with a resolution of 1 dBm with the range [-115, ..., -25] dBm.</p> <p>P-CCPCH RSCP shall be reported in the unit P-CCPCH_RSCP_LEV where:</p> <table> <tr> <td>P-CCPCH_RSCP_LEV00:</td> <td></td> <td>P-CCPCH_RSCP &lt; -115dBm</td> </tr> <tr> <td>P-CCPCH_RSCP_LEV01:</td> <td>-115dBm</td> <td>≤ P-CCPCH_RSCP &lt; -114dBm</td> </tr> <tr> <td>P-CCPCH_RSCP_LEV02:</td> <td>-114dBm</td> <td>≤ P-CCPCH_RSCP &lt; -113dBm</td> </tr> <tr> <td>...</td> <td></td> <td></td> </tr> <tr> <td>P-CCPCH_RSCP_LEV89:</td> <td>-27dBm</td> <td>≤ P-CCPCH_RSCP &lt; -26dBm</td> </tr> <tr> <td>P-CCPCH_RSCP_LEV90:</td> <td>-26dBm</td> <td>≤ P-CCPCH_RSCP &lt; -25dBm</td> </tr> <tr> <td>P-CCPCH_RSCP_LEV91:</td> <td>-25dBm</td> <td>≤ P-CCPCH_RSCP</td> </tr> </table>	P-CCPCH_RSCP_LEV00:		P-CCPCH_RSCP < -115dBm	P-CCPCH_RSCP_LEV01:	-115dBm	≤ P-CCPCH_RSCP < -114dBm	P-CCPCH_RSCP_LEV02:	-114dBm	≤ P-CCPCH_RSCP < -113dBm	...			P-CCPCH_RSCP_LEV89:	-27dBm	≤ P-CCPCH_RSCP < -26dBm	P-CCPCH_RSCP_LEV90:	-26dBm	≤ P-CCPCH_RSCP < -25dBm	P-CCPCH_RSCP_LEV91:	-25dBm	≤ P-CCPCH_RSCP
P-CCPCH_RSCP_LEV00:		P-CCPCH_RSCP < -115dBm																				
P-CCPCH_RSCP_LEV01:	-115dBm	≤ P-CCPCH_RSCP < -114dBm																				
P-CCPCH_RSCP_LEV02:	-114dBm	≤ P-CCPCH_RSCP < -113dBm																				
...																						
P-CCPCH_RSCP_LEV89:	-27dBm	≤ P-CCPCH_RSCP < -26dBm																				
P-CCPCH_RSCP_LEV90:	-26dBm	≤ P-CCPCH_RSCP < -25dBm																				
P-CCPCH_RSCP_LEV91:	-25dBm	≤ P-CCPCH_RSCP																				



## 5.1.2 CPICH RSCP

<b>Definition</b>	Received Signal Code Power, the received power on the CPICH code after despreading. The reference point for the RSCP is the antenna connector at the UE.
<b>Applicable for</b>	idle mode, connected mode (inter-frequency)
<b>Range/mapping</b>	<p>CPICH RSCP is given with a resolution of 1 dBm with the range [-115, ..., -25] dBm. CPICH RSCP shall be reported in the unit CPICH_RSCP_LEV where:</p> <p>CPICH_RSCP_LEV00: CPICH_RSCP &lt; -115dBm</p> <p>CPICH_RSCP_LEV01: -115dBm ≤ CPICH_RSCP &lt; -114dBm</p> <p>CPICH_RSCP_LEV02: -114dBm ≤ CPICH_RSCP &lt; -113dBm</p> <p>...</p> <p>CPICH_RSCP_LEV89: -27dBm ≤ CPICH_RSCP &lt; -26dBm</p> <p>CPICH_RSCP_LEV90: -26dBm ≤ CPICH_RSCP &lt; -25dBm</p> <p>CPICH_RSCP_LEV91: -25dBm ≤ CPICH_RSCP</p>

## 5.1.3 RSCP

<b>Definition</b>	Received Signal Code Power, the received power on the code of a specified DPCH or PDSCH after despreading. The reference point for the RSCP is the antenna connector at the UE.
<b>Applicable for</b>	connected mode (intra-frequency)
<b>Range/mapping</b>	<p>RSCP is given with a resolution of 1 dBm with the range [-115, ..., -25] dBm. RSCP shall be reported in the unit UE_RSCP_LEV where:</p> <p>UE_RSCP_LEV00: RSCP &lt; -115dBm</p> <p>UE_RSCP_LEV01: -115dBm ≤ RSCP &lt; -114dBm</p> <p>UE_RSCP_LEV02: -114dBm ≤ RSCP &lt; -113dBm</p> <p>...</p> <p>UE_RSCP_LEV89: -27dBm ≤ RSCP &lt; -26dBm</p> <p>UE_RSCP_LEV90: -26dBm ≤ RSCP &lt; -25dBm</p> <p>UE_RSCP_LEV91: -25dBm ≤ RSCP</p>

## 5.1.4 Timeslot ISCP

<b>Definition</b>	Interference Signal Code Power, the interference on the received signal in a specified timeslot after despreading. Only the non-orthogonal part of the interference is included in the measurement. The reference point for the ISCP is the antenna connector at the UE.
<b>Applicable for</b>	connected mode (intra-frequency)
<b>Range/mapping</b>	<p>Timeslot ISCP is given with a resolution of 1 dBm with the range [-115, ..., -25] dBm. Timeslot ISCP shall be reported in the unit UE_TS_ISCP_LEV where:</p> <p>UE_TS_ISCP_LEV00: Timeslot_ISCP &lt; -115dBm</p> <p>UE_TS_ISCP_LEV01: -115dBm ≤ Timeslot_ISCP &lt; -114dBm</p> <p>UE_TS_ISCP_LEV02: -114dBm ≤ Timeslot_ISCP &lt; -113dBm</p> <p>...</p> <p>UE_TS_ISCP_LEV89: -27dBm ≤ Timeslot_ISCP &lt; -26dBm</p> <p>UE_TS_ISCP_LEV90: -26dBm ≤ Timeslot_ISCP &lt; -25dBm</p> <p>UE_TS_ISCP_LEV91: -25dBm ≤ Timeslot_ISCP</p>

### 5.1.5 UTRA carrier RSSI

<b>Definition</b>	Received Signal Strength Indicator, the wide-band received power within the relevant channel bandwidth in a specified timeslot. Measurement shall be performed on a UTRAN DL carrier. The reference point for the RSSI is the antenna connector at the UE.
<b>Applicable for</b>	idle mode, connected mode (intra- & inter-frequency)
<b>Range/mapping</b>	<p>UTRA carrier RSSI is given with a resolution of 1 dBm with the range [-94, ..., -32] dBm.</p> <p>UTRA carrier RSSI shall be reported in the unit UTRA_carrier_RSSI_LEV where:</p> <p>UTRA_carrier_RSSI_LEV00: UTRA_carrier_RSSI &lt; -94dBm</p> <p>UTRA_carrier_RSSI_LEV01: -94dBm ≤ UTRA_carrier_RSSI &lt; -93dBm</p> <p>UTRA_carrier_RSSI_LEV02: -93dBm ≤ UTRA_carrier_RSSI &lt; -92dBm</p> <p>...</p> <p>UTRA_carrier_RSSI_LEV61: -34dBm ≤ UTRA_carrier_RSSI &lt; -33dBm</p> <p>UTRA_carrier_RSSI_LEV62: -33dBm ≤ UTRA_carrier_RSSI &lt; -32dBm</p> <p>UTRA_carrier_RSSI_LEV63: -32dBm ≤ UTRA_carrier_RSSI</p>

### 5.1.6 GSM carrier RSSI

<b>Definition</b>	Received Signal Strength Indicator, the wide-band received power within the relevant channel bandwidth in a specified timeslot. Measurement shall be performed on a GSM BCCH carrier. The reference point for the RSSI is the antenna connector at the UE.
<b>Applicable for</b>	idle mode, connected mode (inter-frequency)
<b>Range/mapping</b>	According to the definition of RXLEV in GSM 05.08.

### 5.1.7 SIR

<b>Definition</b>	Signal to Interference Ratio, defined as the RSCP of a DPCH or PDSCH divided by ISCP of the same timeslot. The reference point for the SIR is the antenna connector of the UE.
<b>Applicable for</b>	connected mode (intra-frequency)
<b>Range/mapping</b>	<p>SIR is given with a resolution of 0.5 dB with the range [-11, ..., 20] dB.</p> <p>SIR shall be reported in the unit SIR where:</p> <p>SIR_00: SIR &lt; -11.0dB</p> <p>SIR_01: -11.0dB ≤ SIR &lt; -10.5dB</p> <p>SIR_02: -10.5dB ≤ SIR &lt; -10.0dB</p> <p>....</p> <p>SIR_61: 19.0dB ≤ SIR &lt; 19.5dB</p> <p>SIR_62: 19.5dB ≤ SIR &lt; 20.0dB</p> <p>SIR_63: 20.0dB ≤ SIR</p>

### 5.1.8 CPICH Ec/No

<b>Definition</b>	The received energy per chip divided by the power density in the band. The Ec/No is identical to RSCP/RSSI. The reference point for Ec/No is the antenna connector at the UE.
<b>Applicable for</b>	idle mode, connected mode (inter-frequency)
<b>Range/mapping</b>	<p>CPICH Ec/No is given with a resolution of 1 dB with the range [-24, ..., 0] dB.</p> <p>CPICH Ec/No shall be reported in the unit CPICH_Ec/No where:</p> <p>CPICH_Ec/No_00: CPICH_Ec/No &lt; -24dB</p> <p>CPICH_Ec/No_01: -24dB ≤ CPICH_Ec/No &lt; -23dB</p> <p>CPICH_Ec/No_02: -23dB ≤ CPICH_Ec/No &lt; -22dB</p> <p>...</p> <p>CPICH_Ec/No_23: -2dB ≤ CPICH_Ec/No &lt; -1dB</p> <p>CPICH_Ec/No_24: -1dB ≤ CPICH_Ec/No &lt; 0dB</p> <p>CPICH_Ec/No_25: 0dB ≤ CPICH_Ec/No</p>

### 5.1.9 Physical channel BER

<b>Definition</b>	The physical channel BER is an estimation of the average bit error rate (BER) before channel decoding of the data.
<b>Applicable for</b>	connected mode (intra-frequency)
<b>Range/mapping</b>	Physical channel BER is given with a logarithmic resolution of 0.065 with the range $[10^{-4.03} \dots 1]$ including a separate case Physical channel BER=0. Physical channel BER shall be reported in the unit PhCH_BER_dB, where: PhCH_BER_dB_00: BER = 0 PhCH_BER_dB_01: $-\infty < \text{Log}_{10}(\text{Physical channel BER}) < -4.030$ PhCH_BER_dB_02: $-4.030 \leq \text{Log}_{10}(\text{Physical channel BER}) < -3.965$ PhCH_BER_dB_03: $-3.965 \leq \text{Log}_{10}(\text{Physical channel BER}) < -3.900$ ... PhCH_BER_dB_61: $-0.195 \leq \text{Log}_{10}(\text{Physical channel BER}) < -0.130$ PhCH_BER_dB_62: $-0.130 \leq \text{Log}_{10}(\text{Physical channel BER}) < -0.065$ PhCH_BER_dB_63: $-0.065 \leq \text{Log}_{10}(\text{Physical channel BER}) \leq 0.000$

### 5.1.10 Transport channel BLER

<b>Definition</b>	Estimation of the transport channel block error rate (BLER). The BLER estimation shall be based on evaluating the CRC on each transport block.
<b>Applicable for</b>	connected mode (intra-frequency)
<b>Range/mapping</b>	Transport channel BLER is given with a logarithmic resolution of 0.065 with the range $[10^{-4.03} \dots 1]$ including a separate case Transport channel BLER=0. Transport channel BLER shall be reported in the unit TCH_BLER_dB, where: TCH_BLER_dB_00: BLER = 0 TCH_BLER_dB_01: $-\infty < \text{Log}_{10}(\text{Transport channel BLER}) < -4.030$ TCH_BLER_dB_02: $-4.030 \leq \text{Log}_{10}(\text{Transport channel BLER}) < -3.965$ TCH_BLER_dB_03: $-3.965 \leq \text{Log}_{10}(\text{Transport channel BLER}) < -3.900$ ... TCH_BLER_dB_61: $-0.195 \leq \text{Log}_{10}(\text{Transport channel BLER}) < -0.130$ TCH_BLER_dB_62: $-0.130 \leq \text{Log}_{10}(\text{Transport channel BLER}) < -0.065$ TCH_BLER_dB_63: $-0.065 \leq \text{Log}_{10}(\text{Transport channel BLER}) \leq 0.000$

### 5.1.11 UE transmitted power

<b>Definition</b>	The total UE transmitted power on one carrier measured in a timeslot. The reference point for the UE transmitted power shall be the UE antenna connector.
<b>Applicable for</b>	connected mode (intra-frequency).
<b>Range/mapping</b>	UE transmitted power is given with a resolution of 1dBm with the range $[-50, \dots, 33]$ dBm. UE transmitted power shall be reported in the unit UE_TX_POWER, where:  UE_TX_POWER_000 to UE_TX_POWER_020: reserved UE_TX_POWER_021: $-50\text{dBm} \leq \text{UE\_transmitted\_power} < -49\text{dBm}$ UE_TX_POWER_022: $-49\text{dBm} \leq \text{UE\_transmitted\_power} < -48\text{dBm}$ UE_TX_POWER_023: $-48\text{dBm} \leq \text{UE\_transmitted\_power} < -47\text{dBm}$ ... UE_TX_POWER_102: $31\text{dBm} \leq \text{UE\_transmitted\_power} < 32\text{dBm}$ UE_TX_POWER_103: $32\text{dBm} \leq \text{UE\_transmitted\_power} < 33\text{dBm}$ UE_TX_POWER_104: $33\text{dBm} \leq \text{UE\_transmitted\_power} < 34\text{dBm}$

## 5.1.12 SFN-SFN observed time difference

<b>Definition</b>	<p>SFN-SFN observed time difference is the time difference of the reception times of frames from two cells (serving and target) measured in the UE and expressed in chips. It is distinguished in two types: Type 2 applies if the serving and the target cell have the same frame timing and SFN numbering. Type 1 applies in all other cases.</p> <p><b>Type 1:</b>  SFN-SFN observed time difference = <math>OFF \times 38400 + T_m</math> in chips, where:  <math>T_m = T_{RxSFNk} - T_{RxSFNi}</math>, given in chip units with the range [0, 1, ..., 38399] chips  <math>T_{RxSFNi}</math>: time of start of the received frame SFN<sub>i</sub> of the serving TDD cell i.  <math>T_{RxSFNk}</math>: time of start of the received frame SFN<sub>k</sub> of the target UTRA cell k after the time instant <math>T_{RxSFNi}</math> in the UE. If the next frame of the target UTRA cell is received exactly at <math>T_{RxSFNi}</math> then <math>T_{RxSFNk} = T_{RxSFNi}</math> (which leads to <math>T_m = 0</math>).  <math>OFF = (SFN_k - SFN_i) \bmod 256</math>, given in number of frames with the range [0, 1, ..., 255] frames  SFN<sub>i</sub>: system frame number for downlink frame from serving TDD cell i in the UE at the time <math>T_{RxSFNi}</math>.  SFN<sub>k</sub>: system frame number for downlink frame from target UTRA cell k received in the UE at the time <math>T_{RxSFNk}</math>. (for FDD: the P-CCPCH frame)</p> <p><b>Type 2:</b>  SFN-SFN observed time difference = <math>T_{RxTSk} - T_{RxTSi}</math>, in chips, where  <math>T_{RxTSi}</math>: time of start of a timeslot received of the serving TDD cell i.  <math>T_{RxTSk}</math>: time of start of a timeslot received from the target UTRA cell k that is closest in time to the start of the timeslot of the serving TDD cell i.</p>
<b>Applicable for</b>	idle mode, connected mode (intra-frequency)
<b>Range/mapping</b>	<p>Type 1:  SFN-SFN observed time difference is given with a resolution of 1 chip with the range [0; 9830400] chips (24 bits).  SFN-SFN observed time difference shall be reported in the unit T1_SFN-SFN_TIME, where  T1_SFN-SFN_TIME_N:  <math>N * 1 \text{ chip} \leq \text{SFN-SFN observed time difference} &lt; (N+1) * 1 \text{ chip}</math>  With N= 0, 1, 2, ..., 9830399</p> <p>Type 2:  SFN-SFN observed time difference is given with a resolution of 0.25 chip with the range (-1280; 1280] chips (14 bits).  SFN-SFN observed time difference shall be reported in the unit T2_SFN-SFN_TIME, where  T2_SFN-SFN_TIME_N:  <math>N * 0.25 \text{ chip} - 1280 \text{ chips} &lt; \text{SFN-SFN observed time difference} \leq (N+1) * 0.25 \text{ chip} - 1280 \text{ chips}</math>  With N= 0, 1, 2, ..., 10239</p>

## 5.1.13 Observed time difference to GSM cell

<b>Definition</b>	<p>Observed time difference to GSM cell is the time difference <math>T_m</math> in ms, where  <math>T_m = T_{RxGSMk} - T_{RxSFN0i}</math>  <math>T_{RxSFN0i}</math>: time of start of the received frame SFN=0 of the serving TDD cell i  <math>T_{RxGSMk}</math>: time of start of the received 51-GSM-multiframe of the considered target GSM beacon frequency k which is following next after the start of frame SFN=0 of the serving TDD cell.</p>
<b>Applicable for</b>	Idle mode, connected mode (inter-frequency)
<b>Range/mapping</b>	<p>Observed time difference to GSM cell is given with a resolution of <math>3060\text{ms}/(13*4096)</math> (12 bit) with the range [0, 3060] ms.  Observed time difference to GSM cell shall be reported in the unit GSM_TIME, where  GSM_TIME_N:  <math>N * 3060\text{ms}/(13*4096) \leq \text{Observed time difference to GSM cell} &lt; (N+1) * 3060\text{ms}/(13*4096)</math>  With N= 0, 1, 2, ..., 4095</p>

## 5.2 UTRAN measurement abilities

NOTE 1: If the UTRAN supports multiple frequency bands then the measurements apply for each frequency band individually.

NOTE 2: The RSCP can either be measured on the data part or the midamble of a burst, since there is no power offset between both. However, in order to have a common reference, the measurement on the midamble is assumed.

### 5.2.1 RSCP

<b>Definition</b>	Received Signal Code Power, the received power on one DPCH, PRACH or PUSCH code after despreading. The reference point for the RSCP shall be the antenna connector.
<b>Range/mapping</b>	RSCP is given with a resolution of 0.5 dBm with the range [-120, ..., -80] dBm. RSCP shall be reported in the unit UTRAN_RSCP_LEV where: UTRAN_RSCP_LEV00: RSCP < -120.0dBm UTRAN_RSCP_LEV01: -120.0dBm ≤ RSCP < -119.5dBm UTRAN_RSCP_LEV02: -119.5dBm ≤ RSCP < -119.0dBm ... UTRAN_RSCP_LEV79: -81.0dBm ≤ RSCP < -80.5dBm UTRAN_RSCP_LEV80: -80.5dBm ≤ RSCP < -80.0dBm UTRAN_RSCP_LEV81: -80.0dBm ≤ RSCP

### 5.2.2 Timeslot ISCP

<b>Definition</b>	Interference Signal Code Power, the interference on the received signal in a specified timeslot after despreading. Only the non-orthogonal part of the interference is included in the measurement. The reference point for the ISCP shall be the antenna connector.
<b>Range/mapping</b>	Timeslot ISCP is given with a resolution of 0.5 dBm with the range [-120, ..., -80] dBm. Timeslot ISCP shall be reported in the unit UTRAN_TS_ISCP_LEV where: UTRAN_TS_ISCP_LEV00: Timeslot_ISCP < -120.0dBm UTRAN_TS_ISCP_LEV01: -120.0dBm ≤ Timeslot_ISCP < -119.5dBm UTRAN_TS_ISCP_LEV02: -119.5dBm ≤ Timeslot_ISCP < -119.0dBm ... UTRAN_TS_ISCP_LEV79: -81.0dBm ≤ Timeslot_ISCP < -80.5dBm UTRAN_TS_ISCP_LEV80: -80.5dBm ≤ Timeslot_ISCP < -80.0dBm UTRAN_TS_ISCP_LEV81: -80.0dBm ≤ Timeslot_ISCP

### 5.2.3 RSSI

<b>Definition</b>	Received Signal Strength Indicator, the wide-band received power within the UTRAN UL channel bandwidth in a specified timeslot. The reference point for the RSSI shall be the antenna connector.
<b>Range/mapping</b>	RSSI is given with a resolution of 0.5dBm with the range [-105, ..., -74] dBm. RSSI shall be reported in the unit RSSI_LEV, where: RSSI_LEV00: RSSI < -105.0dBm RSSI_LEV01: -105.0dBm ≤ RSSI < -104.5dBm RSSI_LEV02: -104.5dBm ≤ RSSI < -104.0dBm ... RSSI_LEV61: -75.0dBm ≤ RSSI < -74.5dBm RSSI_LEV62: -74.5dBm ≤ RSSI < -74.0dBm RSSI_LEV63: -74.0dBm ≤ RSSI

## 5.2.4 SIR

<b>Definition</b>	Signal to Interference Ratio, defined as the RSCP of the DPCH or PUSCH divided by ISCP of the same timeslot. The reference point for the SIR shall be the antenna connector.
<b>Range/mapping</b>	<p>SIR is given with a resolution of 0.5 dB with the range [-11, ..., 20] dB.</p> <p>SIR shall be reported in the unit SIR where:</p> <p>SIR_00: SIR &lt; -11.0dB</p> <p>SIR_01: -11.0dB ≤ SIR &lt; -10.5dB</p> <p>SIR_02: -10.5dB ≤ SIR &lt; -10.0dB</p> <p>....</p> <p>SIR_61: 19.0dB ≤ SIR &lt; 19.5dB</p> <p>SIR_62: 19.5dB ≤ SIR &lt; 20.0dB</p> <p>SIR_63: 20.0dB ≤ SIR</p>

## 5.2.5 Physical channel BER

<b>Definition</b>	The physical channel BER is an estimation of the average bit error rate (BER) of a DPCH or PUSCH before channel decoding of the data.
<b>Range/mapping</b>	<p>Physical channel BER is given with a logarithmic resolution of 0.065 with the range [10<sup>-4.03</sup> ... 1] including a separate case Physical channel BER=0.</p> <p>Physical channel BER shall be reported in the unit PhCH_BER_dB, where:</p> <p>PhCH_BER_dB_00: BER = 0</p> <p>PhCH_BER_dB_01: -∞ &lt; Log10(Physical channel BER) &lt; -4.030</p> <p>PhCH_BER_dB_02: -4.030 ≤ Log10(Physical channel BER) &lt; -3.965</p> <p>PhCH_BER_dB_03: -3.965 ≤ Log10(Physical channel BER) &lt; -3.900</p> <p>...</p> <p>PhCH_BER_dB_61: -0.195 ≤ Log10(Physical channel BER) &lt; -0.130</p> <p>PhCH_BER_dB_62: -0.130 ≤ Log10(Physical channel BER) &lt; -0.065</p> <p>PhCH_BER_dB_63: -0.065 ≤ Log10(Physical channel BER) ≤ 0.000</p>

## 5.2.6 Transport channel BLER

<b>Definition</b>	Estimation of the transport channel block error rate (BLER) of a DCH or USCH. The BLER estimation shall be based on evaluating the CRC on each transport block.
<b>Range/mapping</b>	<p>Transport channel BLER is given with a logarithmic resolution of 0.065 with the range [10<sup>-4.03</sup> ... 1] including a separate case Transport channel BLER=0.</p> <p>Transport channel BLER shall be reported in the unit TCH_BLER_dB, where:</p> <p>TCH_BLER_dB_00: BLER = 0</p> <p>TCH_BLER_dB_01: -∞ &lt; Log10(Transport channel BLER) &lt; -4.030</p> <p>TCH_BLER_dB_02: -4.030 ≤ Log10(Transport channel BLER) &lt; -3.965</p> <p>TCH_BLER_dB_03: -3.965 ≤ Log10(Transport channel BLER) &lt; -3.900</p> <p>...</p> <p>TCH_BLER_dB_61: -0.195 ≤ Log10(Transport channel BLER) &lt; -0.130</p> <p>TCH_BLER_dB_62: -0.130 ≤ Log10(Transport channel BLER) &lt; -0.065</p> <p>TCH_BLER_dB_63: -0.065 ≤ Log10(Transport channel BLER) ≤ 0.000</p>

## 5.2.7 Transmitted carrier power

<b>Definition</b>	Transmitted carrier power, is the total transmitted power on one DL carrier from one UTRAN access point measured in a timeslot. The reference point for the UTRAN total transmitted power measurement shall be the antenna connector.
<b>Range/mapping</b>	Transmitted carrier power is given with a resolution of 0.5dBm with the range [0, ..., 50] dBm. Transmitted carrier power shall be reported in the unit UTRAN_TX_POWER, where: UTRAN_TX_POWER_000 to UTRAN_TX_POWER_015: reserved UTRAN_TX_POWER_016: 0.0dBm ≤ Transmitted carrier power < 0.5dBm UTRAN_TX_POWER_017: 0.5dBm ≤ Transmitted carrier power < 1.0dBm UTRAN_TX_POWER_018: 1.0dBm ≤ Transmitted carrier power < 1.5dBm ... UTRAN_TX_POWER_114: 49.0dBm ≤ Transmitted carrier power < 49.5dBm UTRAN_TX_POWER_115: 49.5dBm ≤ Transmitted carrier power < 50.0dBm UTRAN_TX_POWER_116: 50.0dBm ≤ Transmitted carrier power < 50.5dBm

## 5.2.8 Transmitted code power

<b>Definition</b>	Transmitted Code Power, is the transmitted power on one carrier and one channelisation code in one timeslot. The reference point for the transmitted code power measurement shall be the antenna connector at the UTRAN access point cabinet.
<b>Range/mapping</b>	Transmitted code power is given with a resolution of 0.5dBm with the range [-10, ..., 46] dBm. Transmitted code power shall be reported in the unit UTRAN_TX_CODE_POWER, where: UTRAN_TX_CODE_POWER_000 to UTRAN_TX_CODE_POWER_009: reserved UTRAN_TX_CODE_POWER_010: -10.0dBm ≤ CODE_POWER < -9.5dBm UTRAN_TX_CODE_POWER_011: -9.5dBm ≤ CODE_POWER < -8.5dBm UTRAN_TX_CODE_POWER_012: -8.5dBm ≤ CODE_POWER < -7.5dBm ... UTRAN_TX_CODE_POWER_120: 45.0dBm ≤ CODE_POWER < 45.5dBm UTRAN_TX_CODE_POWER_121: 45.5dBm ≤ CODE_POWER < 46.0dBm UTRAN_TX_CODE_POWER_122: 46.0dBm ≤ CODE_POWER < 46.5dBm

## 5.2.9 RX Timing Deviation

<b>Definition</b>	'RX Timing Deviation' is the time difference $TRX_{dev} = TTS - TRX_{path}$ in chips, with TRX <sub>path</sub> : time of the reception in the Node B of the first significant uplink path to be used in the detection process TTS : time of the beginning of the respective slot according to the Node B internal timing
<b>Range/mapping</b>	RX Timing Deviation is given with a resolution of 0.25 chip with the range [0; 1024) chips (12 bit). RX Timing Deviation cell shall be reported in the unit RX_TIME_DEV, where RX_TIME_DEV: $N * 0.25 \text{ chips} \leq \text{RX Timing Deviation} < (N+1) * 0.25 \text{ chips}$ With N= 0, 1, 2, ..., 4095


NOTE: This measurement can be used for timing advance calculation or location services.

# Annex A (informative): Monitoring GSM from TDD: Calculation Results

## A.1 Low data rate traffic using 1 uplink and 1 downlink slot

NOTE : The section evaluates the time to acquire the FCCH if all idle slots are devoted to the tracking of a FCCH burst, meaning that no power measurements is done concurrently. The derived figures are better than those for GSM. The section does not derive though any conclusion. A conclusion may be that the use of the idle slots is a valid option. An alternative conclusion may be that this is the only mode to be used, removing hence the use of the slotted frames for low data traffic or the need for a dual receiver, if we were to considering the monitoring of GSM cells only, rather than GSM, TDD and FDD.

If a single synthesiser UE uses only one uplink and one downlink slot, e.g. for speech communication, the UE is not in transmit or receive state during 13 slots in each frame. According to the timeslot numbers allocated to the traffic, this period can be split into two continuous idle intervals A and B as shown in the figure below.

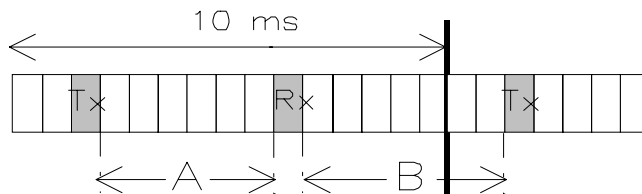

**Figure A.1: Possible idle periods in a frame with two occupied timeslots.**

A is defined as the number of idle slots between the Tx and Rx slots and B the number of idle slots between the Rx and Tx slots. It is clear that  $A+B=13$  time slots.

In the scope of low cost terminals, a [0.8] ms period is supposed to be required to perform a frequency jump from UMTS to GSM. This lets possibly two free periods of  $A \cdot T_s - 1.6$  ms and  $B \cdot T_s - 1.6$  ms during which the mobile station can monitor GSM,  $T_s$  being the slot period.

Following table evaluates the average synchronisation time and maximum synchronisation time, where the announced synchronisation time corresponds to the time needed to find the FCCH. The FCCH is supposed to be perfectly detected meaning that the FCCH is found if it is entirely present in the monitoring window. The FCCH being found the SCH location is unambiguously known from that point. All the 13 idle slots are assumed to be devoted to FCCH tracking and the UL traffic is supposed to occupy the time slot 0.



**Table A.1: example- of average and maximum synchronisation time with two busy timeslots per frame and with 0.8 ms switching time (\*).**

Downlink time slot number	Number of free TS in A	Number of free TS in B	Average synchronisation time (ms)	Maximum synchronisation time (ms)
1	0	13	44	140
2	1	12	50	187
3	2	11	58	188
4	3	10	66	189
5	4	9	70	233
6	5	8	77	234
7	6	7	75	189
8	7	6	75	189
9	8	5	75	235
10	9	4	67	235
11	10	3	63	186
12	11	2	56	186
13	12	1	49	186
14	13	0	43	132

(\*) All simulations have been performed with a random initial delay between GSM frames and UMTS frames

Each configuration of TS allocation described above allows a monitoring period sufficient to acquire synchronisation.

### A.1.1 Higher data rate traffic using more than 1 uplink and/or 1 downlink TDD timeslot

The minimum idle time to detect a complete FCCH burst for all possible alignments between the GSM and the TDD frame structure (called 'guaranteed FCCH detection'), assuming that monitoring happens every TDD frame, can be calculated as follows ( $t_{FCCH}$  = one GSM slot):

$$t_{\min, \text{guaranteed}} = 2 \times t_{\text{synth}} + t_{FCCH} + \frac{10\text{ms}}{13} = 2 \times t_{\text{synth}} + \frac{35\text{ms}}{26}$$

(e.g for  $t_{\text{synth}}=0\text{ms}$ : 3 TDD **consecutive** idle timeslots needed, for  $t_{\text{synth}}=0,3\text{ms}$ : 3 slots, for  $t_{\text{synth}}=0,5\text{ms}$ : 4 slots, for  $t_{\text{synth}}=0,8\text{ms}$ : 5 slots). Under this conditions the FCCH detection time can never exceed the time of 660ms.

(For a more general consideration  $t_{\text{synth}}$  may be considered as a sum of all delays before starting monitoring is possible.) For detecting SCH instead of FCCH (for a parallel search) the same equation applies.

In the equation before the dual synthesiser UE is included if the synthesiser switching time is 0ms.

**Table A.2: FCCH detection time for a dual synthesizer UE monitoring GSM from TDD every TDD frame**

occupied slots= 15-idle slots	cases	FCCH detection time in ms	
		Average	maximum
2	105	37	189
3	455	46	327
4	1365	58	419
5	3003	72	501
6	5005	90	646
7	6435	114	660
8	6435	144	660
9	5005	175	660
10	3003	203	660
11	1365	228	660
12	455	254	660
13	105	-	-
14	15	-	-

In the table above for a given number of occupied slots in the TDD mode all possible cases of distributions of these occupied TDD slots are considered (see 'cases'). For every case arbitrary alignments of the TDD and the GSM frame structure are taken into account for calculating the average FCCH detection time (only these cases are used which guarantee FCCH detection for all alignments; only the non-parallel FCCH search is reflected by the detection times in the table 2).

The term 'occupied slots' means that the UE is not able to monitor in these TDD slots.

For a synthesiser switching time of one or one half TDD timeslot the number of needed consecutive idle TDD timeslots is summarized in the table below:

**Table A.3: Link between the synthesiser performance and the number of free consecutive TSs for guaranteed FCCH detection, needed for GSM monitoring**

One-way switching time for the synthesiser	Number of free consecutive TDD timeslots needed in the frame for a guaranteed FCCH detection
1 TS (=2560 chips)	5
0.5 TS (=1280 chips)	4
0 (dual synthesiser)	3

## Annex B (informative): Change history

Change history					
TSG RAN#	Version	CR	Tdoc RAN	New Version	Subject/Comment
RAN_05	-	-	RP-99595	3.0.0	Approved at TSG RAN #5 and placed under Change Control
RAN_06	3.0.0	001	RP-99700	3.1.0	Primary and Secondary CCPCH in TDD
RAN_06	3.0.0	002	RP-99701	3.1.0	Block STTD capability for P-CCPCH, TDD component
RAN_06	3.0.0	003	RP-99700	3.1.0	Update concerning measurement definitions, ranges and mappings
-	3.1.0	-	-	3.1.1	Change history was added by the editor

---

# History

<b>Document history</b>		
V3.1.1	January 2000	Publication