

ETSI TS 125 411 V18.0.0 (2024-04)



**Universal Mobile Telecommunications System (UMTS);
UTRAN Iu interface layer 1
(3GPP TS 25.411 version 18.0.0 Release 18)**



Reference

RTS/TSGR-0325411 vi00

Keywords

UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
1 Scope	5
2 References	5
3 Abbreviations	6
4 Iu Layer 1	6
4.1 Introduction	6
4.2 Layer 1 Description	6
4.2.1 Layer 1 Synchronised	6
4.2.2 [IP – Layer 1 Unsynchronised]	8
4.3 Requirements from higher layer	8
4.4 Services Provided by Layer 1	8
4.4.1 ATM Transport.....	8
4.5 Interface to Management Plane	8
Annex A (informative): Change History	10
History	11

Foreword

This Technical Specification (TS) has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies the standards allowed to implement Layer 1 on the Iu interface.

The specification of transmission delay requirements and O&M requirements are not in the scope of the present document.

In the following 'Layer 1' and 'Physical Layer' are assumed to be synonymous.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] ITU-T Recommendation I.432.2 (1996-08): "ISDN User-Network interfaces, Layer 1 Recommendations, 155 520 kbit/s and 622 080 kbit/s operation".
- [2] Void.
- [3] ITU-T Recommendation G.703 (1998-10): "Physical/electrical characteristics of hierarchical digital interfaces".
- [4] ITU-T Recommendation G.704 (1998-10): "Synchronous frame structures used at 1544, 6312, 2048, 8448 and 44 736 kbit/s hierarchical levels".
- [5] ITU-T Recommendation G.957 (1995-07): "Optical interfaces for equipments and systems relating to the synchronous digital hierarchy".
- [6] ITU-T Recommendation I.432.1 (1996-08): "ISDN User-Network interfaces, Layer 1 Recommendations, General characteristics".
- [7] ITU-T Recommendation G.823 (2000-03): "The control of jitter and wander within digital networks which are based on the 2048 kbit/s hierarchy".
- [8] ITU-T Recommendation G.824 (2000-03): "The control of jitter and wander within digital networks which are based on the 1544 kbit/s hierarchy".
- [9] ITU-T Recommendation G.825 (2001-08): "The control of jitter and wander within digital networks which are based on the synchronous digital hierarchy (SDH)".
- [10] ITU-T Recommendation G.826 (1996-08): "Error performance parameters and objectives for international, constant bit rate digital paths at or above the primary rate".
- [11] ITU-T Recommendation I.361 (1995-11): "B-ISDN ATM layer specification".
- [12] ATM Forum AF-PHY-0016.000 (1994-09): "DS1 Physical Layer Specification".
- [13] ATM Forum AF-PHY-0064.000 (1996-09): "E1 Physical Layer Interface Specification".
- [14] ATM Forum AF-PHY-0086.001 (1999-02): "Inverse Multiplexing for ATM (IMA) Specification Version 1.1".

- [15] ITU-T Recommendation G.751 (1988-11): "Digital multiplex equipments operating at the third order bit rate of 34 368 kbit/s and the fourth order bit rate of 139 264 kbit/s and using positive justification".
- [16] ITU-T Recommendation G.811 (1997-02): "Timing Characteristics of Primary Reference Clocks".
- [17] ITU-T Recommendation G.804 (1998-02): "ATM cell mapping into plesiochronous digital hierarchy (PDH)".
- [18] Standard ECMA-226: "Private Integrated Services Network (PISN) - Mapping Functions for the Employment of Dedicated Circuit Mode Connections as Inter-PTNX Connections (MAPPING-CM-STATIC)".
- [19] ITU-T Recommendation I.431 (1988-11): "Primary rate user-network interface - Layer 1 specification".

3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ATM	Asynchronous Transfer Mode
HEC	Header Error Control
IMA	Inverse Multiplexing on ATM
IP	Internet Protocol
PDH	Plesiochronous Digital Hierarchy
PMD	Physical Media Dependent
PHY-SAP	Physical Service Access Point
SDH	Synchronous Digital Hierarchy
SDU	Service Data Unit
SONET	Synchronous Optical Networking

4 Iu Layer 1

4.1 Introduction

The main functions of Layer 1 are summarised in the following:

- Interface to physical medium;
- [ATM-Cell delineation];
- Line clock extraction capability;
- Layer 1 alarms extraction and generation;
- In-sequence delivery;
- Transmission quality control.

4.2 Layer 1 Description

4.2.1 Layer 1 Synchronised

When the Layer 1 Synchronised option is used (i.e. PDH/SDH/SONET links), the following requirements shall be met:

Layer 1 reference configuration shall be according to ITU-T Rec. I.432.1 [6].

The physical layer is divided into:

- Physical Media Dependent (PMD) sublayer;
- Transmission Convergence (TC) sublayer defined according to ITU-T Rec. I.432.1 [6].

The PMD shall comply with at least one of the following standards:

- ETSI STM-4 (622 Mb/s) interface according to ITU-T Rec. I.432.2 [1] with optical S-4.1 interface according to ITU-T Rec. G.957 [5].
- SONET STS-12c (622 Mb/s) interface according to ANSI, T1.105-1995 with optical multimode.
- SONET STS-3c (155 Mb/s) interface according to ANSI, T1.105-1995 with optical multimode.
- ETSI STM-1 (155 Mb/s) interface according to ITU-T Rec. I.432.2 [1] with electrical interface (CMI) to ITU-T Rec. G.703 [3].
- ETSI STM-1 (155 Mb/s) interface according to ITU-T Rec. I.432.2 [1] with optical S-1.1 interface according to ITU-T Rec. G.957 [5].
- ITU STS-1 (51 Mb/s) interface according to ANSI, T1.105-1995 with electrical interface.
- ITU STM-0 (51 Mb/s) interface according to ETSI/TTC with electrical interface.
- ITU STM-0 (51 Mb/s) interface according to ETSI/TTC with optical S-1.1 interface according to ITU-T Rec. G.957 [5].
- J2, 6.3 Mb/s interface according to Japanese standard JT-G.703 (ITU-T Rec. G.703 [3]) and JT-G.704 (ITU-T Rec. G.704 [4]) (75 Ohm).

NOTE: J2 requires that the ATM cells be mapped into the physical layer according to HEC based mapping in ITU-R Rec. G.804 [17].

- E2, 8Mb/s according to ETSI/ITU G.703 (ITU-T Rec. G.703 [3]) and G.704 (ITU-T Rec. G.704 [4]) (75 Ohm).
- E3, 34 Mb/s interface according to ETSI/ITU G.751 (ITU-T Rec. G.751 [15]) (75 Ohm).
- T3, 45 Mb/s interface according to ANSI/ITU G.703 (ITU-T Rec. G.703 [3]) and G.704 (ITU-T Rec. G.704 [4]) (75 Ohm).
- E1, 2Mb/s interface balanced 120 Ohm symmetrical according to ETS 300 420 (Standard ECMA-226 [18]), ITU-T Rec. G.704 [4] and TBR 013 (ITU-T Rec. G.703 [3]), and AF-PHY-0064.000 [13].
- E1, 2Mb/s according to ITU-T Rec. G.703 [3] and ITU-T Rec. G.704 [4] (75 Ohm), and AF-PHY-0064.000 [13].
- J1, 1.5 Mb/s interface according to JT-I.431-a (ITU-T Rec. I.431 [19]) (100 Ohm).
- J1, 1.5 Mb/s interface according to JT-G.703 (ITU-T Rec. G.703 [3]) and JT-G.704 (ITU-T Rec. G.704 [4]) (110 Ohm).
- T1, 1.5 Mb/s interface according to AF-PHY-0016.000 [12] and ITU-T Rec. G.703 [3] and ITU-T Rec. G.704 [4] (100 Ohm).

Services provided to the upper layer shall be independent from the used underlying technology.

The support of intervening transport networks - like PDH or SDH terrestrial links, Point-to-point or Point-to-Multipoint radio links - shall not be prevented.

When using E1, T1, or J1, it shall be possible to use inverse multiplexing of ATM (IMA) (ATM Forum AF-PHY-0086.001 [14]) within suitable subsets of the physical ports on the respective Exchange Termination (ET).

The jitter and wander performance requirements on the interface shall be in accordance with network limits for output wander at traffic interfaces of either Reference ITU-T Rec. G.823 [7], ITU-T Rec. G.824 [8] or network limits for the maximum output jitter and wander at any hierarchical interface of Reference ITU-T Rec. G.825 [9], whichever is applicable.

The synchronisation reference extracted from the Iu may be used as UTRAN synchronisation reference. A general recommendation is to supply a traceable synchronisation reference according to reference ITU-T Rec. G.811 [16].

Transmission quality control shall be provided according to ITU-T Rec. G.826 [10].

4.2.2 [IP – Layer 1 Unsynchronised]

When Layer 1 unsynchronised option is used, the following requirements shall be met:

The support of any suitable physical layer - like Ethernet L1 or other suitable point-to-point or point-to-multipoint techniques - shall not be prevented.

4.3 Requirements from higher layer

No specific requirements beyond the ones listed in the introduction have been identified.

4.4 Services Provided by Layer 1

4.4.1 ATM Transport

The physical layer provides services to the upper layer via the Physical Service Access Point (PHY-SAP) according to ITU-T I.361 [11], as described in the following figure:

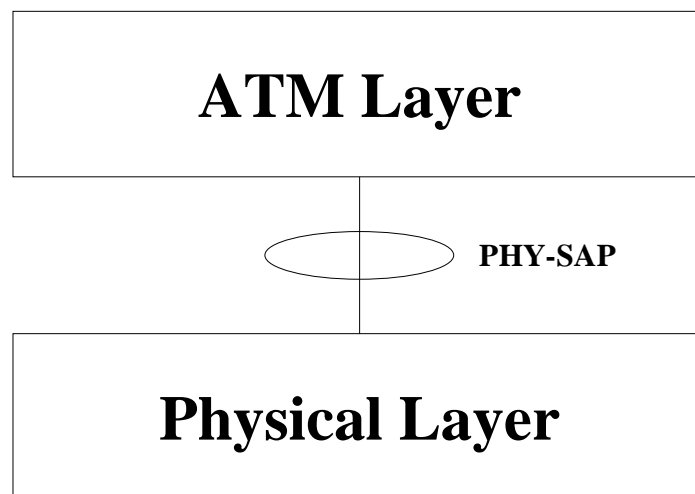


Figure 1: SAP between Physical Layer and ATM Layer

According to ITU-T Rec. I.361 [11], subclause 3.2, the following primitives are provided over PHY-SAP:

- PHY-DATA request (PHY-SDU);
- PHY-DATA indication (PHY-SDU).

The parameter PHY-SDU contains one ATM cell as defined in ITU-T I.361 [11] received or to be transferred over the physical medium.

4.5 Interface to Management Plane

The description of the interface towards Management Plane is out of scope of this document, anyhow at least the following O&M functions should be foreseen:

- Performance Monitoring Functions;

- Alarm Status Reporting Functions;
- Synchronisation Source Management.

Annex A (informative): Change History

Date / TSG	TSG Doc.	CR	Rev	Subject/Comment	New
12/2008	-	-	-	Creation of Rel-8 version based on v7.1.0	8.0.0
12/2009	-	-	-	Creation of Rel-9 version based on v8.0.0	9.0.0
03/2011	SP-100629			Clarification on the use of References (TS 21.801 CR#0030)	9.0.1
03/2011				Creation of Rel-10 version based on v9.0.1	10.0.0
06/2011	RP-110684	0019		Correction of references	10.1.0
09/2012				Update to Rel-11 version (MCC)	11.0.0
09/2014				Update to Rel-12 version (MCC)	12.0.0
12/2015				Update to Rel-13 version (MCC)	13.0.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2017-03	SA#75					Promotion to Release 14 without technical change	14.0.0
2018-06	SA#80	-	-	-	-	Promotion to Release 15 without technical change	15.0.0
2020-07	SA#88-e	-	-	-	-	Update to Rel-16 version (MCC)	16.0.0
2022-03	SA#95-e					Promotion to Release 17 without technical change	17.0.0
2024-03	SA#103-	-	-	-	-	Update to Rel-18 version (MCC)	18.0.0

History

Document history		
V18.0.0	April 2024	Publication