

ETSI TS 125 414 V3.2.0 (2000-01)

Technical Specification

Universal Mobile Telecommunications System (UMTS); UTRAN Iu Interface Data Transport and Transport Signalling (3G TS 25.414 version 3.2.0 Release 1999)



Reference

DTS/TSGR-0325414U

Keywords

UMTS

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE
Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16
Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Internet

secretariat@etsi.fr
Individual copies of this ETSI deliverable
can be downloaded from
<http://www.etsi.org>
If you find errors in the present document, send your
comment to: editor@etsi.fr

Important notice

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by the ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables. The mapping of document identities is as follows:

For 3GPP documents:

3G TS | TR nn.nnn "<title>" (with or without the prefix 3G)

is equivalent to

ETSI TS | TR 1nn nnn "[Digital cellular telecommunications system (Phase 2+) (GSM);] Universal Mobile Telecommunications System; <title>

For GSM document identities of type "GSM xx.yy", e.g. GSM 01.04, the corresponding ETSI document identity may be found in the Cross Reference List on www.etsi.org/key

Contents

1	Scope.....	4
2	References.....	4
3	Definitions, symbols and abbreviations.....	5
3.1	Definitions	5
3.2	Symbols	5
3.3	Abbreviations.....	5
4	ATM Layer	6
4.1	General.....	6
4.2	Protection Switching at ATM Layer.....	6
5	Circuit switched domain	6
5.1	Transport network user plane.....	6
5.1.1	General	6
5.1.2	ATM Adaptation Layer 2.....	6
5.1.2.1	AAL2-Segmentation and Reassembly Service Specific Convergence Sublayer (I.366.1).....	6
5.1.2.2	AAL2-specification (I.363.2)	6
5.2	Transport network control plane.....	6
5.2.1	General	6
5.2.2	Signalling protocol (ALCAP)	7
5.2.2.1	AAL2 Signalling Protocol (Q.2630.1).....	7
5.2.3	Signalling transport converter	7
5.2.3.1	AAL2 MTP3B Signalling Transport Converter (Q.2150.1).....	7
5.2.4	MTP3b (Q.2210).....	7
5.2.5	SSCF-NNI (Q.2140)	7
5.2.6	SSCOP (Q.2110).....	7
5.2.7	ATM Adaptation Layer Type 5 (I.363.5).....	7
6	Packet switched domain.....	7
6.1	Transport network user plane.....	7
6.1.1	General	7
6.1.2	GTP-U.....	8
6.1.3	UDP /IP	8
6.1.4	ATM Adaptation Layer Type 5 (I.363.5).....	8
6.1.5	IP/ATM	8
6.2	Transport network control plane.....	8
	Annex A (informative): Change History	9
	History.....	10

Foreword

This Technical Specification has been produced by the 3GPP.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version 3.y.z

where:

x the first digit:

1 presented to TSG for information;

2 presented to TSG for approval;

3 Indicates TSG approved document under change control.

Y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.

z the third digit is incremented when editorial only changes have been incorporated in the specification.

1 Scope

The present document specifies the standards for user data transport protocols and related signalling protocols to establish user plane transport bearers over the UTRAN Iu interface.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] ITU-T Recommendation I.361 (2/1999): "B-ISDN ATM Layer Specification".
- [2] ITU-T Recommendation I.363.2 (9/1997): "B-ISDN ATM Adaptation Layer Type 2 Specification".
- [3] ITU-T Recommendation I.363.5 (8/1996): "B-ISDN ATM Adaptation Layer Type 5 Specification".
- [4] ITU-T Recommendation I.366.1 (6/1998): "Segmentation and Reassembly Service Specific Convergence Sublayer for the AAL Type 2".
- [5] ITU-T Recommendation E.164 (5/1997): "Numbering Plan for the ISDN Era".

- [6] ITU-T Recommendation Q.2110 (7/1994): "B-ISDN ATM Adaptation Layer-Service Specific Connection Oriented Protocol (SSCOP)".
- [7] ITU-T Recommendation Q.2140 (2/1995): "B-ISDN ATM Adaptation Layer-Service Specific Coordination Function for Support of Signalling at the Network Node Interface (SSCF-NNI)".
- [8] ITU-T Recommendation Q.2150.1 (1999): "B-ISDN ATM Adaptation Layer-Signalling Transport Converter for the MTP3b".
- [9] ITU-T Recommendation Q.2210 (7/1996): "Message Transfer Part level 3 functions and messages using the services of ITU-T Recommendation Q.2140".
- [10] ITU-T Recommendation Q.2630.1 (1999): "AAL type 2 Signalling Protocol (Capability Set 1)".
- [11] ITU-T Recommendation X.213 (8/1997): "Information Technology-Open Systems Interconnection-Network Service Definitions".
- [12] IETF RFC 768 (8/1980): "User Datagram Protocol".
- [13] IETF RFC 791 (9/1981): "Internet Protocol".
- [14] IETF RFC 1483 (7/1993): "Multiprotocol Encapsulation over ATM Adaptation Layer 5".
- [15] IETF RFC 2225 (4/1998): "Classical IP and ARP over ATM".
- [16] IETF RFC 2460 (12/1998): "Internet Protocol, Version 6 (IPv6) Specification".
- [17] 3G TS 29.060: "3GPP; TSG CN; GPRS; GPRS Tunnelling Protocol (GTP)".
- [18] ITU-T Rec. **I.630** (2/99): "ATM Protection Switching".

3 Definitions, symbols and abbreviations

3.1 Definitions

ALCAP Generic name for the transport signalling protocols used to set-up and teardown transport bearers.

3.2 Symbols

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AAL	ATM Adaptation Layer
AESA	ATM End System Address
ALCAP	Access Link Control Application Part
ARP	Address Resolution Protocol
ATM	Asynchronous Transfer Mode
RFC	Request For Comment
CN	Core Network
GTP	GPRS Tunnelling Protocol
IP	Internet Protocol
MTP3b	Message Transfer Part level 3 for Q.2140
NSAP	Network Service Access Point
PDU	Protocol Data Unit
RNC	Radio Network Controller
SAR	Segmentation and Reassembly
SCCF-NNI	Service Specific Coordination Function-Network Node Interface
SSCOP	Service Specific Connection Oriented Protocol
SSCS	Service Specific Convergence Sublayer

UDP User Datagram Protocol
VC Virtual Circuit

4 ATM Layer

4.1 General

ATM shall be used in the transport network user plane and the transport network control plane according to I.3610.

4.2 Protection Switching at ATM Layer

If redundancy of pathways at ATM layer between CN and RNC is supported, it shall be implemented using ATM Protection Switching according to I.630 [18].

5 Circuit switched domain

5.1 Transport network user plane

5.1.1 General

The following figure shows the protocol stack for the transport network user plane on the Iu interface towards the circuit switched domain.

AAL-2 SAR SCS (I.366.1)
AAL2 (I.363.2)
ATM

5.1.2 ATM Adaptation Layer 2

5.1.2.1 AAL2-Segmentation and Reassembly Service Specific Convergence Sublayer (I.366.1)

AAL2 segmentation and reassembly shall be used according to I.366.1 [4].

5.1.2.2 AAL2-specification (I.363.2)

AAL2 shall be used according to I.363.2 [2].

5.2 Transport network control plane

5.2.1 General

The following figure shows the protocol stack for the transport network control plane on the Iu interface towards the circuit switched domain.

AAL2 connection signalling (Q.2630.1)
--

AAL2 Signalling Transport Converter for MTP3b (Q.2150.1)
MTP3b
SSCF-NNI
SSCOP
AAL5
ATM

5.2.2 Signalling protocol (ALCAP)

5.2.2.1 AAL2 Signalling Protocol (Q.2630.1)

Q.2630.1 0 shall be used for establishing AAL2 connections towards the circuit switched domain. The AAL2 transport layer uses the embedded E.164 0 or AESA variants of the NSAP addressing formats 0. Native E.164 addressing shall not be used.

Binding ID provided by the radio network layer shall be copied in SUGR parameter of ESTABLISH.request primitive of [10].

5.2.3 Signalling transport converter

5.2.3.1 AAL2 MTP3B Signalling Transport Converter (Q.2150.1)

The AAL2 MTP3b Signalling Transport Converter shall be used according to Q.2150.1 0.

5.2.4 MTP3b (Q.2210)

MTP3b shall be used according to Q.2210 0.

5.2.5 SSCF-NNI (Q.2140)

SSCF-NNI shall be used according to Q.2140 0.

5.2.6 SSCOP (Q.2110)

SSCOP shall be used according to Q.2110 0.

5.2.7 ATM Adaptation Layer Type 5 (I.363.5)


AAL5 shall be used according to I.363.5 0.


6 Packet switched domain

6.1 Transport network user plane

6.1.1 General

The following figure shows the protocol stack for the transport network user plane on the Iu interface towards the packet switched domain.



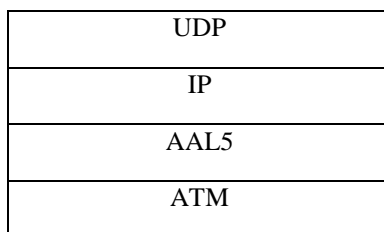

The protocol architecture for the User Plane of the Iu interface towards the packet switched domain shall be GTP-U over UDP over IP over AAL5 over ATM. One or several AAL5/ATM permanent VC's may be used as the common layer 2 resources between the UTRAN and the packet switched domain of the CN.

One switched VC may be used per user flow. The standardisation of the procedures and protocols for use of Switched VC is outside the scope of 3GPP.

Congestion control shall be performed over the Iu user plane toward the packet switched domain using buffer management and no flow control.

6.1.2 GTP-U

The GTP-U protocol shall be used over the Iu interface toward the packet switched domain.

6.1.3 UDP /IP

The path protocol used shall be UDP, which is specified in RFC 768. Both the IPv4 and IPv6 IP protocols shall be supported which are specified in RFC 791 (IPv4) or RFC 2460 (IPv6).

The IP addresses for the CN and RNC nodes are exchanged using RANAP signalling. The packet processing function in the CN sends downstream packets to the RNC IP address received in the RANAP signalling. The packet processing function in the RNC sends upstream packets to the CN IP address received in the RANAP signalling.

The GTP UDP port number as defined in GTP[17] is used for the destination port for GTP-U control messages and T-PDUs. The sending node locally allocates the UDP source port number. For GTP-U control messages, the UDP destination port is the value of the UDP source port of the corresponding GTP-U control message. The UDP source port is the value of the UDP destination port of the corresponding GTP-U control message.

6.1.4 ATM Adaptation Layer Type 5 (I.363.5)

AAL5 shall be used according to I.363.5.

AAL5 virtual circuits are used to transport the IP packets across the Iu interface toward the packet switched domain. Multiple VCs can be used over the interface. There is a one-to-one relationship between the VC and the IP address as required by Classical IP over ATM. An association must be made between a peer node's IP address and a VC. This association can be made using O&M or using ATM Inverse ARP according to Classical IP over ATM when PVCs are used.

6.1.5 IP/ATM

Classical IP over ATM protocols are used to carry the IP packets over the ATM transport network when PVCs are used. Classical IP over ATM is specified in IETF RFC 2225. Multiprotocol Encapsulation over AAL5 is specified in IETF RFC 1483.

6.2 Transport network control plane

ALCAP is not required over the Iu interface towards the packet switched domain.

Annex A (informative): Change History

Change history					
TSG RAN#	Version	CR	Tdoc RAN	New Version	Subject/Comment
RAN_04	-	-	-	3.0.0	Approved at TSG RAN #4 by correspondence and placed under Change Control
RAN_05	3.0.0	-	-	3.1.0	Approved at TSG RAN #5
RAN_06	3.1.0	001	RP-99747	3.2.0	Approved at TSG RAN #6

Rapporteur for TS25.414 is:

David Comstock
Ericsson Radio Systems AB
Tel.: +46 8 585 31226
Fax : +46 8 404 3597
Email : david.comstock@era.ericsson.se

History

Document history		
V3.2.0	January 2000	Publication