


# ETSI TS 125 419 V3.0.0 (2000-03)

*Technical Specification*

**Universal Mobile Telecommunications System (UMTS);  
UTRAN Iu Interface: Service Area Broadcast Protocol SABP  
(3G TS 25.419 version 3.0.0 Release 1999)**

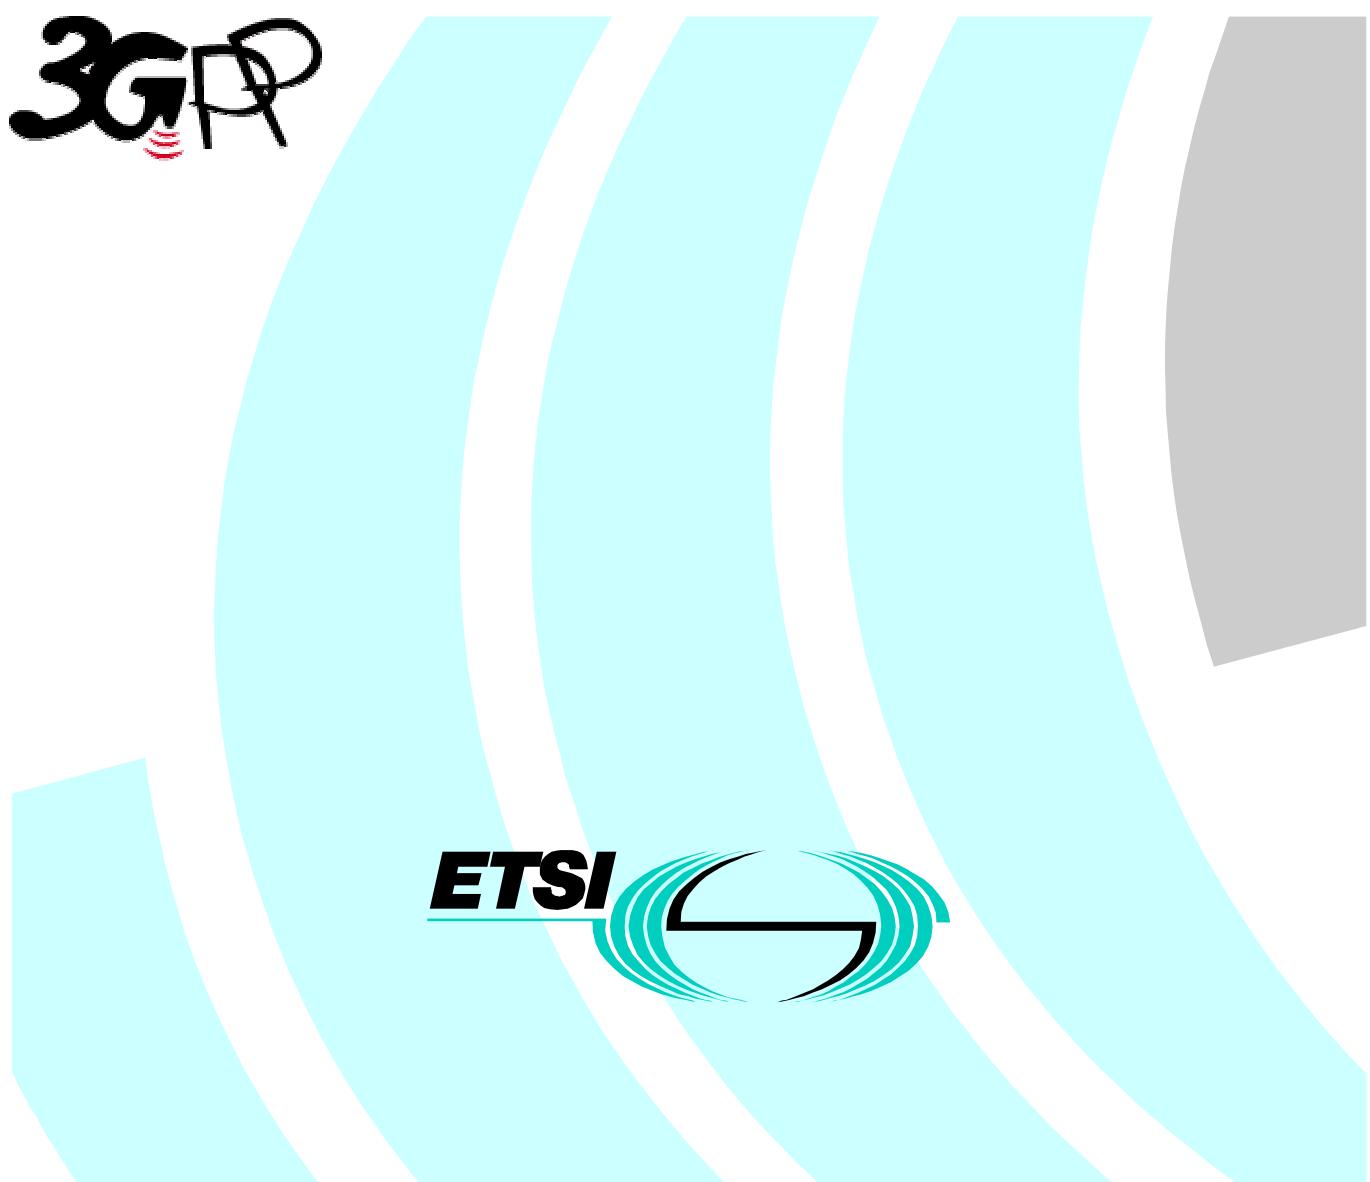

---

Reference

DTS/TSGR-0325419U

---

Keywords

UMTS

***ETSI***

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

***Important notice***

Individual copies of the present document can be downloaded from:  
<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).  
In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.  
Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:  
[editor@etsi.fr](mailto:editor@etsi.fr)

---

***Copyright Notification***

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.

All rights reserved.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Specification (TS) has been produced by the ETSI 3<sup>rd</sup> Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under [www.etsi.org/key](http://www.etsi.org/key).

---

# Contents

Foreword .....	5
1 Scope.....	6
2 References.....	6
3 Definitions and abbreviations .....	6
3.1 Definitions .....	6
3.2 Abbreviations.....	7
4 General.....	7
5 Services provided by SABP.....	7
6 Services expected from the Transport layer.....	7
7 Functions of SABP .....	7
8 SABP Procedures.....	8
8.1 Elementary Procedures .....	8
8.2 Write-Replace .....	8
8.2.1 General .....	8
8.2.2 Successful Operation.....	9
8.2.3 Unsuccessful Operation.....	9
8.2.4 Abnormal Conditions .....	10
8.3 Kill .....	10
8.3.1 General .....	10
8.3.2 Successful Operation.....	10
8.3.3 Unsuccessful Operation.....	10
8.3.4 Abnormal Conditions .....	11
8.4 Load Status Enquiry.....	11
8.4.1 General .....	11
8.4.2 Successful Operation.....	11
8.4.3 Unsuccessful Operation.....	11
8.4.4 Abnormal Conditions .....	12
8.5 Message Status Query.....	12
8.5.1 General .....	12
8.5.2 Successful Operation.....	12
8.5.3 Unsuccessful Operation.....	13
8.5.4 Abnormal Conditions .....	13
8.6 Reset .....	13
8.6.1 General .....	13
8.6.2 Successful Operation.....	13
8.6.3 Unsuccessful Operation.....	14
8.6.4 Abnormal Conditions .....	14
8.7 Restart Indication.....	14
8.7.1 General .....	14
8.7.2 Successful Operation.....	15
8.7.3 Abnormal Conditions .....	15
8.8 Failure Indication.....	15
8.8.1 General .....	15
8.8.2 Successful Operation.....	15
8.8.3 Abnormal Conditions .....	16
8.9 Error Indication.....	16
8.9.1 General .....	16
8.9.2 Successful Operation.....	16
8.9.3 Abnormal Conditions .....	16
9 Elements for SABP Communication .....	16
9.1 Message Contents .....	16

9.1.1	WRITE-REPLACE .....	17
9.1.2	WRITE-REPLACE COMPLETE .....	18
9.1.3	WRITE-REPLACE FAILURE .....	18
9.1.4	KILL .....	18
9.1.5	KILL COMPLETE .....	18
9.1.6	KILL FAILURE .....	18
9.1.7	LOAD QUERY .....	19
9.1.8	LOAD QUERY COMPLETE .....	19
9.1.9	LOAD QUERY FAILURE .....	19
9.1.10	MESSAGE STATUS QUERY .....	19
9.1.11	MESSAGE STATUS QUERY COMPLETE .....	19
9.1.12	MESSAGE STATUS QUERY FAILURE .....	20
9.1.13	RESET .....	20
9.1.14	RESET COMPLETE .....	20
9.1.15	RESET FAILURE .....	20
9.1.16	RESTART .....	20
9.1.17	FAILURE .....	21
9.1.18	ERROR INDICATION .....	21
9.2	Information Element Definitions .....	21
9.2.1	Message-Identifier .....	21
9.2.2	Broadcast-Message-Content .....	21
9.2.3	Serial-Number .....	21
9.2.4	Old-Serial-Number .....	21
9.2.5	New-Serial-Number .....	22
9.2.6	Service-Areas-List .....	22
9.2.7	Category .....	22
9.2.8	Repetition-Period .....	22
9.2.9	No-of-Broadcasts-Requested .....	22
9.2.10	No-of-Broadcasts-Completed-List .....	23
9.2.11	Service-Area-Identifier .....	23
9.2.12	Failure-List .....	23
9.2.13	Radio-Resource-Loading-List .....	24
9.2.14	Cause .....	24
9.2.15	Data Coding Scheme .....	26
9.2.16	Recovery-Indication .....	26
9.2.17	Criticality-Diagnostics .....	27
9.2.18	Available-Bandwidth .....	27
9.3	Message and Information Element Abstract Syntax (with ASN.1) .....	28
9.3.1	Usage of protocol extension mechanism for non-standard use .....	28
9.3.2	Elementary Procedure Definitions .....	29
9.3.3	PDU Definitions .....	33
9.3.4	Common Definitions .....	46
9.3.5	Constant Definitions .....	47
9.3.6	Container Definitions .....	48
10	Handling of Unknown, Unforeseen or Erroneous Protocol Data .....	51
10.1	General .....	51
10.2	Transfer Syntax Error .....	51
10.3	Abstract Syntax Error .....	51
10.3.1	General .....	51
10.3.2	Handling of the Criticality Information at Reception .....	51
10.3.2.1	Procedure Code .....	51
10.3.2.2	IEs other than the Procedure Code .....	52
10.4	Logical Error .....	52
<b>Annex A (informative):      Change history .....</b>		<b>54</b>

---

## Foreword

This Technical Specification (TS) has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

## 1 Scope

The present document specifies the *Service Area Broadcast Protocol (SABP)* between the Cell Broadcast Centre (CBC) and the Radio Network Controller (RNC). It fulfils the CBC - RNC communication requirements specified in [7] and is defined over the Iu-BC – reference point.

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] UMTS 23.930: "Iu Principles".
- [2] UMTS 25.410: "UTRAN Iu Interface; General Aspects and Principles".
- [3] UMTS 25.401: "UTRAN Overall Description".
- [4] UMTS 25.931: "UTRAN Functions, Examples on Signalling Procedures".
- [5] UMTS 25.412: "UTRAN Iu Interface Signalling Transport".
- [6] UMTS 25.415: "Iu Interface CN-UTRAN User Plane Protocol".
- [7] UMTS 23.041: "Technical realization of Cell Broadcast Service (CBS)".
- [8] UMTS 25.414: "UTRAN Iu Interface Data Transport and Transport Signalling".
- [9] ITU-T Recommendation X.680 (12/94): "Information Technology - Abstract Syntax Notation One (ASN.1): Specification of basic notation".
- [10] ITU-T Recommendation X.681 (12/94): "Information Technology - Abstract Syntax Notation One (ASN.1): Information object specification".
- [11] ITU-T Recommendation X.691 (12/94): "Information Technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)".
- [12] UMTS 25.921: "Guidelines and Principles for Protocol Description and Error Handling".

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

**Elementary Procedure:** The SABP consists of Elementary Procedures (EPs). An Elementary Procedure is a unit of interaction between the CN (CBC) and the RNC. An EP consists of an initiating message and possibly a response message. Two kinds of EPs are used:

- **Class 1:** Elementary Procedures with response (success or failure).
- **Class 2:** Elementary Procedures without response.

For Class 1 EPs, the types of responses can be as follows:

#### Successful

- A signalling message explicitly indicates that the elementary procedure successfully completed with the receipt of the response.

#### Unsuccessful

- A signalling message explicitly indicates that the EP failed.
- On time supervision expiry (i.e. absence of expected response).

Class 2 EPs are considered always successful.

**Message Reference:** This is defined as consisting of the following parameters: Message Identifier, Serial Number, and SAI (Service Area Identifier).

## 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CBC	Cell Broadcast Centre
CBS	Cell Broadcast Service
CN	Core Network
EP	Elementary Procedure
FP	Frame Protocol
PDU	Protocol Data Unit
RNC	Radio Network Controller
SA	Service Area
SABP	Service Area Broadcast Protocol

## 4 General

The protocol described in the present document is the protocol between CN (CBC) and RNC needed for the CBC Application. The CBC Application is described in [7].

## 5 Services provided by SABP

- During normal operation the CN (CBC) initiates all message transfer and query operations. The RNC responds to the message transfer and query operations initiated by the CBC.
- The RNC will open the connection only in case an error (Failure Indication) or recovery (RestartIndication) is to be reported.
- The initiator of a connection is responsible for the termination of the connection.

## 6 Services expected from the Transport layer

Following service is expected from the transport layer:

- in sequence delivery of FP PDU.

## 7 Functions of SABP

The SABP has the following functions:

- Message Handling. This function is responsible for the broadcast of new messages, amend existing broadcasted messages and to stop the broadcasting of specific messages.
- Load Handling. This function is responsible for determining the loading of the broadcast channels at any particular point in time.
- Reset. This function permits the CBC to end broadcasting in one or more Service Areas.
- Error Handling. This function allows the reporting of general error situations, for which function specific error messages have not been defined.

These functions are implemented by one or several SABP elementary procedures described in the following clauses.

## 8 SABP Procedures

### 8.1 Elementary Procedures

In the following tables, all EPs are divided into Class 1, and Class 2 Procedures:

**Table 1: Class 1**

<b>Elementary Procedure</b>	<b>Initiating Message</b>	<b>Successful Outcome</b>	<b>Unsuccessful Outcome</b>
		<b>Response message</b>	<b>Response message</b>
Write-Replace	WRITE-REPLACE	WRITE-REPLACE COMPLETE	WRITE-REPLACE FAILURE
Kill	KILL	KILL COMPLETE	KILL FAILURE
Status Load Enquiry	LOAD QUERY	LOAD QUERY COMPLETE	LOAD QUERY FAILURE
Status Message Query	MESSAGE QUERY	MESSAGE QUERY COMPLETE	MESSAGE QUERY FAILURE
Reset	RESET	RESET COMPLETE	RESET FAILURE

**Table 2: Class 2**


<b>Elementary Procedure</b>	<b>Message</b>
Restart Indication	RESTART
Failure Indication	FAILURE
Error Indication	ERROR INDICATION

### 8.2 Write-Replace

#### 8.2.1 General

The purpose of this Write-Replace procedure is to broadcast new information or replace a message already broadcast to a chosen Service Area(s).

## 8.2.2 Successful Operation

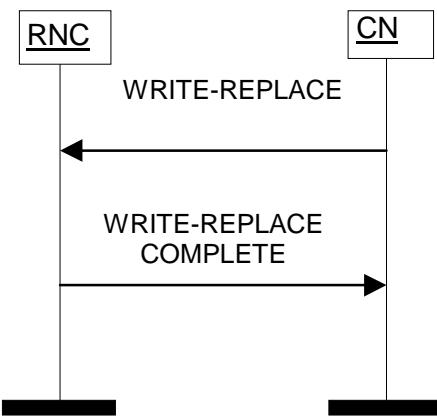


**Figure 1: Write-Replace Procedure: Successful Operation**

The CN shall initiate the procedure by sending a WRITE-REPLACE message to the RNC.

The presence of a New-Serial-Number will indicate that this is a new broadcast. The presence of both the Old-Serial-Number and the New-Serial-Number will indicate that this message is a replacement of an existing broadcast. The RNC will initiate broadcasting of a new message or replace a message already broadcast as requested.

Upon receipt of the WRITE-REPLACE message the RNC shall respond using the WRITE-REPLACE COMPLETE message containing a New-Serial-Number indicating that resources are available as requested for the Service Area(s) specified.

## 8.2.3 Unsuccessful Operation

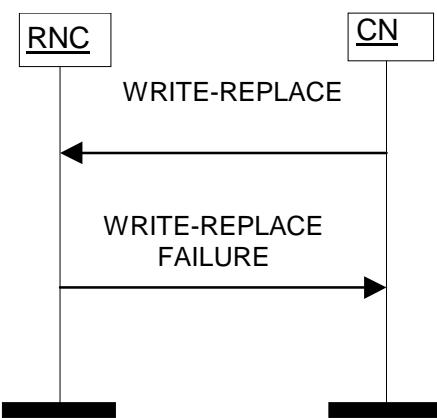

**Figure 2: Write-Replace Procedure: Un-Successful Operation**

If the RNC cannot allocate all the resources requested for the Service Area(s) specified in the WRITE-REPLACE message, then the RNC shall return a WRITE-REPACE FAILURE message to the CN. A list of Service Area(s) where the requested resources are unavailable will be provided in this WRITE-REPLACE FAILURE message in the Failure-List IE.

This WRITE-REPLACE FAILURE message may also include those Service Area(s) where the requested resources were available and will indicate in the Number-of-Broadcasts-Completed IE those Service Area(s) which completed the request.


## 8.2.4 Abnormal Conditions

## 8.3 Kill

### 8.3.1 General

The purpose of the Kill procedure is to stop the broadcast of the indicated message.

### 8.3.2 Successful Operation

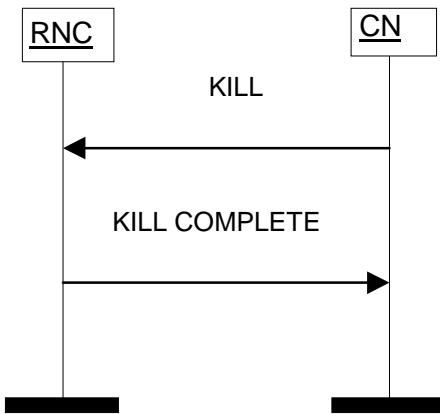


**Figure 3: Kill Procedure: Successful Operation**

The CN shall initiate the procedure by sending a KILL message to the RNC.

Upon receipt of the KILL message the RNC shall stop broadcasting the indicated message in the indicated Service Area(s). The RNC shall respond using the KILL COMPLETE message, containing the Old-Serial number.

### 8.3.3 Unsuccessful Operation

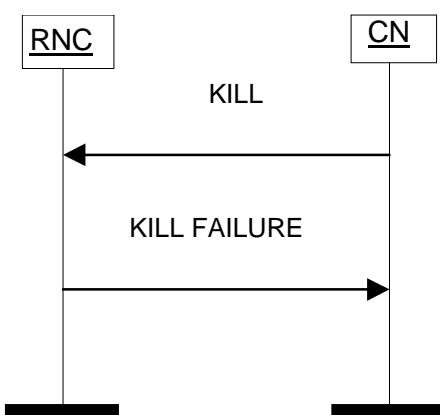

**Figure 4: Kill Procedure: Un-Successful Operation**

A Failure-List IE indicating the list of Service Area(s) where the message reference is not valid will be provided in a KILL FAILURE message. This response message may also – if applicable - indicate in the Number-of-Broadcasts-Completed-List IE those Service Area(s) which completed the request where the KILL message was successful.


### 8.3.4 Abnormal Conditions

## 8.4 Load Status Enquiry

### 8.4.1 General

The purpose of this Load Status Enquiry procedure is to obtain the current permissible bandwidth available for broadcast within particular Service Area(s).


### 8.4.2 Successful Operation

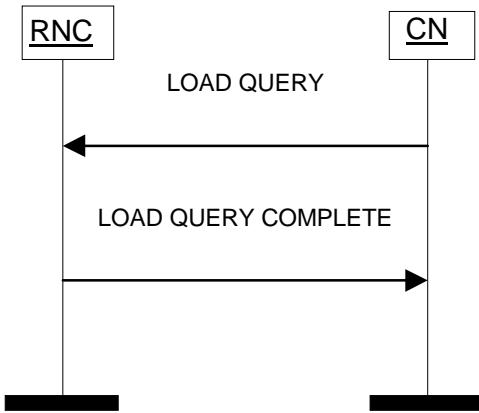

**Figure 5: Load Status Enquiry Procedure: Successful Operation**

The CN shall initiate the procedure by sending a LOAD QUERY message to the RNC. The message shall include a Service Area List. Upon reception of the LOAD QUERY message the RNC shall respond with LOAD QUERY COMPLETE.

### 8.4.3 Unsuccessful Operation

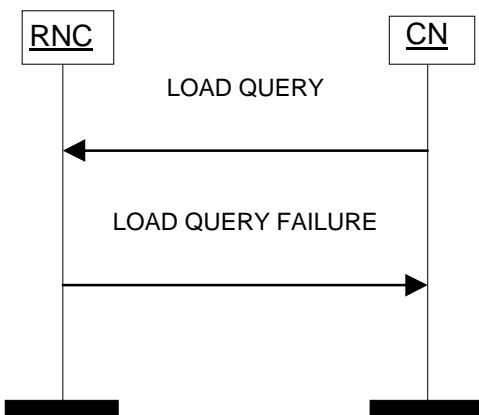

**Figure 6: Load Status Enquiry Procedure: Un-Successful Operation**

If the RNC contains Service Area(s) for which the RNC was not able to respond to, it shall respond with a LOAD QUERY FAILURE message which includes the Failure-List IE.

The LOAD QUERY FAILURE Message may – if applicable - also contain a Radio-Resource-Loading-List IE for which the LOAD STATUS QUERY reporting was successful.


#### 8.4.4 Abnormal Conditions

### 8.5 Message Status Query

#### 8.5.1 General

The Message Status Query procedure is used by the CN to obtain the message status of a broadcast message.

#### 8.5.2 Successful Operation

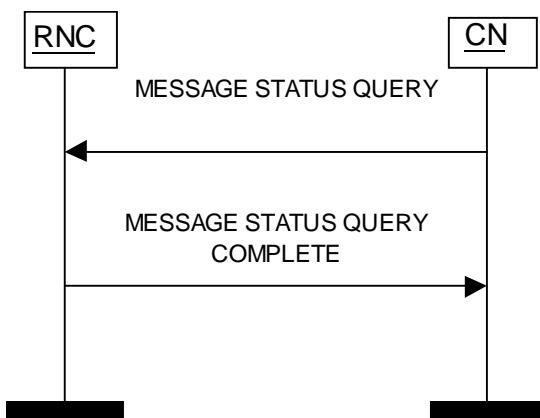


**Figure 7: Message Status Enquiry Procedure: Successful Operation**

The CN shall initiate the procedure by sending a MESSAGE STATUS QUERY message to the RNC. The message will contain the Old-Serial-Number IE along with the appropriate Service Area List.

Upon receipt of the MESSAGE STATUS QUERY message the RNC shall respond using the MESSAGE STATUS QUERY COMPLETE message.

Within this message the No-of-Broadcasts-Completed-List contains each Service Area which successfully performed the requested operation and for each of these Service Area(s), the number of times this broadcast message has been sent to this particular Service Area(s) for broadcast.

### 8.5.3 Unsuccessful Operation

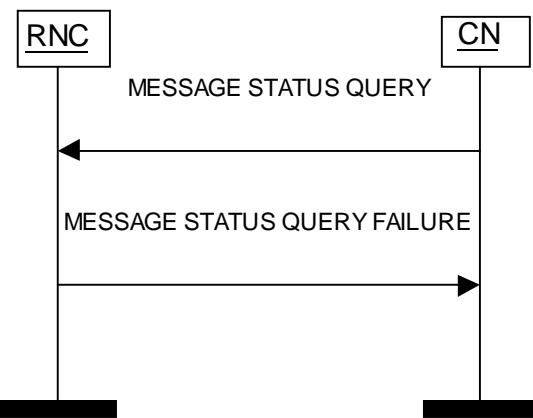

**Figure 8: Message Status Enquiry Procedure: Un-Successful Operation**

If the requested operation fails (e.g. because the Message Identifier is unknown, or when the RNC cannot send the status for a known Message Identifier) the RNC shall send a MESSAGE STATUS QUERY FAILURE to the CN containing a Failure-List IE for Service Area(s) for which the requested operation failed.

The MESSAGE STATUS QUERY FAILURE message may – if applicable - also include the No-of-Broadcasts-Completed-List IE indicating those Service Area(s) for which the Message Status Enquiry was successful.


### 8.5.4 Abnormal Conditions

## 8.6 Reset

### 8.6.1 General

The purpose of the Reset procedure is to end broadcasting in one or more Service Areas in the RNC.

### 8.6.2 Successful Operation

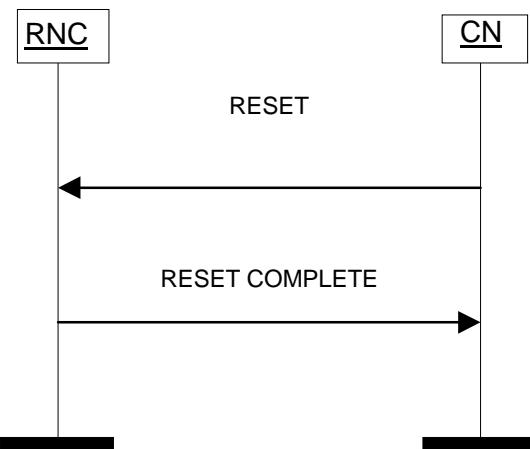


**Figure 9: Reset Procedure: Successful Operation**

The CN shall initiate the procedure by sending a RESET message to the RNC, in order to end broadcasting in one or more Service Areas of the RNC.

It may also be used by the CN to inquire about the Service Area broadcasting operational state of Service Area(s) who had earlier indicated as having failed.

Upon receipt of this message the RNC shall end broadcasting in indicated Service Area(s) and shall respond using a RESET COMPLETE message.

### 8.6.3 Unsuccessful Operation

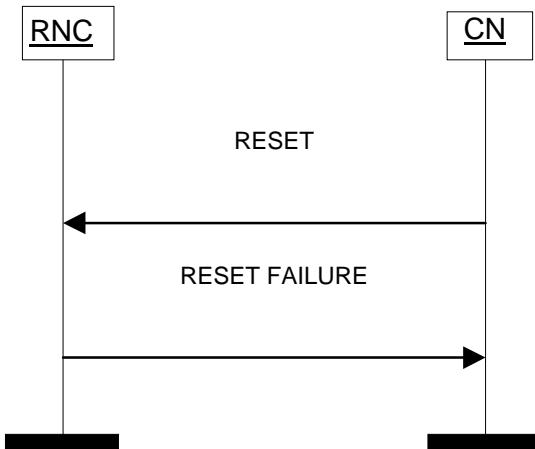

**Figure 10: Reset Procedure: Un-Successful Operation**

If upon receipt of this message the RNC can not end broadcasting in the indicated Service Area(s), it shall respond using a RESET FAILURE message containing the Service Area List IE indicating the relevant Service Area(s).

The RESET FAILURE message may – if applicable - also include those Service Area(s) for which the RESET message was successful.


### 8.6.4 Abnormal Conditions

## 8.7 Restart Indication

### 8.7.1 General

The purpose of the Restart message is for the RNC to indicate to the CN that a Service Area broadcasting related restart situation has occurred in one or more of its Service Areas e.g. when a Service Area becomes operational or when the RNC is initialised.

### 8.7.2 Successful Operation

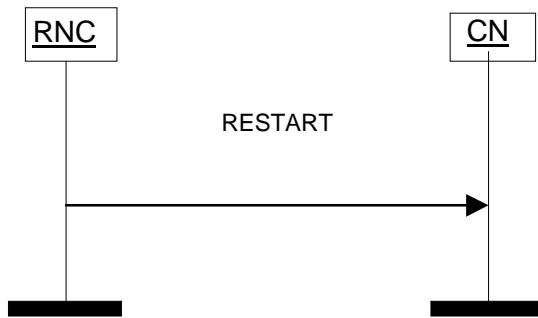

**Figure 11: Restart Procedure: Successful Operation**

The RNC shall initiate the procedure by sending a RESTART message to the CN. This message shall contain a Service Area List IE for reference and may also include an indication as to whether the previously sent information needs to be re-loaded.


### 8.7.3 Abnormal Conditions

## 8.8 Failure Indication

### 8.8.1 General

The purpose of the Failure Indication message is to indicate to the CN from the RNC that a Service Area broadcasting related problem is occurring in one or more of its Service Areas.

### 8.8.2 Successful Operation

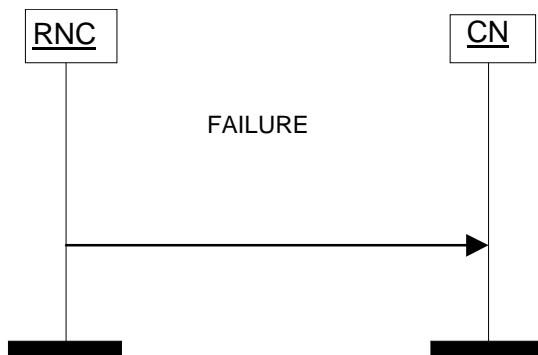

**Figure 12: Failure Procedure: Successful Operation**

The RNC shall initiate the procedure by sending a FAILURE message to the CN.

Upon receipt of this FAILURE indication, the CN will not generate further WRITE or REPLACE messages for these Service Area(s) until the CN is informed by a RESTART message that the Service Area can resume normal Service Area broadcasting operation.


### 8.8.3 Abnormal Conditions

## 8.9 Error Indication

### 8.9.1 General

The Error Indication procedure is used by the RNC to indicate to the CN that a message is not understood, provided it cannot be reported by an appropriate failure message.

### 8.9.2 Successful Operation

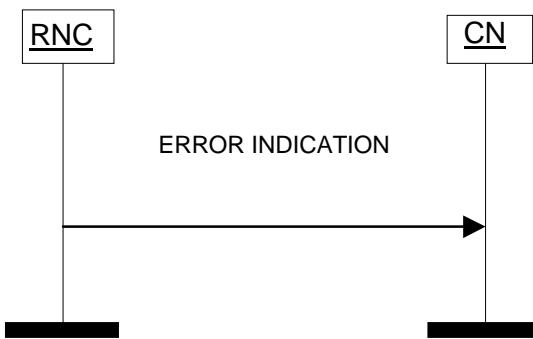

**Figure 13: Error Indication Procedure: Successful Operation**

The RNC shall initiate the procedure by sending an ERROR INDICATION message to the CN in response to any message that is not understood e.g. invalid parameter or parameter value. This message shall contain information necessary for the CN to be able to identify which initial message this is in response to, and additional information e.g. Cause Value.

### 8.9.3 Abnormal Conditions

---

## 9 Elements for SABP Communication

### 9.1 Message Contents

NOTE: The messages have been defined in accordance to the guidelines specified in [12].

For each message there is, a table listing the signalling elements in their order of appearance in the transmitted message.

All the SABP messages are listed in the following table:

**Table 3: List of SABP Messages**

Message name	Reference
WRITE-REPLACE	9.1.1
WRITE-REPLACE COMPLETE	9.1.2
WRITE-REPLACE FAILURE	9.1.3
KILL	9.1.4
KILL COMPLETE	9.1.5
KILL FAILURE	9.1.6
LOAD QUERY	9.1.7
LOAD QUERY COMPLETE	9.1.8
LOAD QUERY FAILURE	9.1.9
MESSAGE STATUS QUERY	9.1.10
MESSAGE STATUS QUERY COMPLETE	9.1.11
MESSAGE STATUS QUERY FAILURE	9.1.12
RESET	9.1.13
RESET COMPLETE	9.1.14
RESET FAILURE	9.1.15
RESTART	9.1.16
FAILURE	9.1.17
ERROR INDICATION	9.1.18

All information elements in the message descriptions below are marked mandatory, optional or conditional according to the following table:

**Table 4: Meaning of abbreviations used in SABP messages**

Abbreviation	Meaning
M	IE's marked as Mandatory (M) will always be included in the message.
O	IE's marked as Optional (O) may or may not be included in the message.
C	IE's marked as Conditional (C) will be included in a message only if the condition is satisfied. Otherwise the IE is not included.

## 9.1.1 WRITE-REPLACE

This message is sent by the CN to the RNC.

Direction: CN → RNC

PARAMETER	PRESENCE	RANGE	IE Type and Reference	Semantics Description
Message-Identifier	M		9.2.1	
New-Serial-Number	M		9.2.5	
Old-Serial-Number	O		9.2.4	
Service-Areas-List	M		9.2.6	
Category	O		9.2.7	
Repetition-Period	O		9.2.8	
No-of-Broadcasts-Requested	M		9.2.9	
Data Coding Scheme	M		9.2.15	
Broadcast-Message-Content	M		9.2.2	

## 9.1.2 WRITE-REPLACE COMPLETE

This message will be sent by the RNC to the CN in a successful response to a WRITE-REPLACE message.

Direction: RNC → CN

PARAMETER	PRESENCE	RANGE	IE Type and Reference	Semantics Description
Message-Identifier	M		9.2.1	
New-Serial-Number	M		9.2.5	
No-of-Broadcasts-Completed-List	M		9.2.9	
Criticality Diagnostics	O		9.2.17	

## 9.1.3 WRITE-REPLACE FAILURE

This message will be sent by the RNC to the CN as an unsuccessful response to a WRITE-REPLACE message.

Direction: RNC → CN

PARAMETER	PRESENCE	RANGE	IE Type and Reference	Semantics Description
Message-Identifier	M		9.2.1	
New-Serial-Number	M		9.2.5	
Failure-List	M		9.2.12	
No-of-Broadcasts-Completed-List	O		9.2.10	
Criticality Diagnostics	O		9.2.17	

## 9.1.4 KILL

This message is sent by the CN to the RNC to stop broadcasting of a specific message.

Direction: CN → RNC

PARAMETER	PRESENCE	RANGE	IE Type and	Semantics Description
Message-Identifier	M		9.2.1	
Old-Serial-Number	M		9.2.4	
Service-Areas-List	M		9.2.6	

## 9.1.5 KILL COMPLETE

This message is sent by the RNC to the CN as a successful response to a KILL message.

Direction: RNC → CN

PARAMETER	PRESENCE	RANGE	IE Type and Reference	Semantics Description
Message-Identifier	M		9.2.1	
Old-Serial-Number	M		9.2.4	
No-of-Broadcasts-Completed-List	M		9.2.9	
Criticality Diagnostics	O		9.2.17	

## 9.1.6 KILL FAILURE

This message is sent by the RNC to the CN as unsuccessful response to a KILL message.

Direction: RNC → CN

PARAMETER	PRESENCE	RANGE	IE Type and Reference	Semantics Description
Message-Identifier	M		9.2.1	
Old-Serial-Number	M		9.2.4	
Failure-List	M		9.2.12	
No-of-Broadcasts-Completed-List	O		9.2.10	
Criticality Diagnostics	O		9.2.17	

### 9.1.7 LOAD QUERY

This message is sent by the CN to the RNC to gain an indication of broadcast resources available.

Direction: CN → RNC

PARAMETER	PRESENCE	RANGE	IE Type and Reference	Semantics Description
Service-Areas-List	M		9.2.6	

### 9.1.8 LOAD QUERY COMPLETE

This message will be sent by the RNC as a successful response to the LOAD QUERY message.

Direction: RNC → CN

PARAMETER	PRESENCE	RANGE	IE Type and Reference	Semantics Description
Radio-Resource-Loading-List	M		9.2.13	
Criticality Diagnostics	O		9.2.17	

### 9.1.9 LOAD QUERY FAILURE

This message is sent by the RNC to the CN as an unsuccessful response to a LOAD QUERY message.

Direction: RNC → CN

PARAMETER	PRESENCE	RANGE	IE Type and Reference	Semantics Description
Failure-List	M		9.2.12	
Radio-Resource-Loading-List	O		9.2.13	
Criticality Diagnostics	O		9.2.17	

### 9.1.10 MESSAGE STATUS QUERY

This message is sent by the CN to the RNC to obtain the current status of a Service Area broadcasting message.

Direction: CN → RNC

PARAMETER	PRESENCE	RANGE	IE Type and Reference	Semantics Description
Message-Identifier	M		9.2.1	
Old-Serial-Number	M		9.2.4	
Service-Areas-List	M		9.2.6	

### 9.1.11 MESSAGE STATUS QUERY COMPLETE

This message is sent by the RNC to the CN as a successful response to a MESSAGE QUERY message.

Direction: RNC → CN

PARAMETER	PRESENCE	RANGE	IE Type and Reference	Semantics Description
Message-Identifier	M		9.2.1	
Old-Serial-Number	M		9.2.4	
No-of-Broadcasts-Completed-List	M		9.2.10	
Criticality Diagnostics	O		9.2.17	

### 9.1.12 MESSAGE STATUS QUERY FAILURE

This message is sent by the RNC to the CN in an unsuccessful response to a MESSAGE QUERY message.

Direction: RNC → CN

PARAMETER	PRESENCE	RANGE	IE Type and Reference	Semantics Description
Message-Identifier	M		9.2.1	
Failure-List	M		9.2.12	
Old-Serial-Number	M		9.2.4	
No-of-Broadcasts-Completed-List	O		9.2.10	
Criticality Diagnostics	O		9.2.17	

### 9.1.13 RESET

The message is sent by the CN to the RNC to request that the RNC end broadcasting in one or more Service Areas.

Direction: CN → RNC

PARAMETER	PRESENCE	RANGE	IE Type and	Semantics Description
Service-Areas-List	M		9.2.6	

### 9.1.14 RESET COMPLETE

This message is sent from the RNC to the CN as a successful response to a RESET message where indicated Service-Area(s) are now not broadcasting any messages.

Direction: RNC → CN

PARAMETER	PRESENCE	RANGE	IE Type and	Semantics Description
Service-Areas-List	M		9.2.6	
Criticality Diagnostics	O		9.2.17	

### 9.1.15 RESET FAILURE

This message is sent from the RNC to the CN as an unsuccessful response to a RESET message to indicate that a Service Area broadcasting related problem exists in one or more of its Service Areas.

Direction: RNC → CN

PARAMETER	PRESENCE	RANGE	IE Type and	Semantics Description
Failure-List	M		9.2.12	
Service-Areas-List	O		9.2.6	
Criticality Diagnostics	O		9.2.17	

### 9.1.16 RESTART

This message is sent from the RNC to the CN to indicate a Service Area broadcasting related restart situation in one or more of its Service-Areas.

Direction: RNC → CN

PARAMETER	PRESENCE	RANGE	IE Type and	Semantics Description
Service-Areas-List	M		9.2.6	
Recovery Indication	O		9.2.16	

### 9.1.17 FAILURE

This message is sent from the RNC to the CN to indicate that a Service Area broadcastingrelated problem exists in one or more of its Service-Areas.

Direction: RNC → CN

PARAMETER	PRESENCE	RANGE	IE Type and	Semantics Description
Service-Areas-List	M		9.2.6	

### 9.1.18 ERROR INDICATION

This message is sent by the RNC to the CN in response to any message which is not understood (e.g. invalid parameter or parameter value).

Direction: RNC → CN

PARAMETER	PRESENCE	RANGE	IE Type and Reference	Semantics Description
Message-Identifier	M		9.2.1	
Serial Number	O		9.2.3	
Cause	O		9.2.14	
Criticality Diagnostics	O		9.2.17	

## 9.2 Information Element Definitions

### 9.2.1 Message-Identifier

This parameter identifies the source/type of a CN message and is passed transparently from the CN to the UE.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and	Semantics Description
Message-Identifier	O		OCTET STRING (2)	

### 9.2.2 Broadcast-Message-Content

This IE is sent from the CN to the	PRESENCE	RANGE	IE Type and	Semantics Description
Broadcast-Message-Content	M		OCTET STRING (1246)	

### 9.2.3 Serial-Number

This parameter is a 16-bit integer which identifies a particular message from the source and type indicated by the Message Identifier and is altered every time the message with a given Message Identifier is changed.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and	Semantics Description
Serial-Number	O		INTEGER (16)	

### 9.2.4 Old-Serial-Number

This IE enables identification of an existing message to be identified. The format of this IE is defined in 9.2.3.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and	Semantics Description
Old-Serial-Number	M		9.2.3	

### 9.2.5 New-Serial-Number

This IE enables identification of a new message for broadcast to be identified, and is altered every time the message is changes. The format of this IE is defined in 9.2.3.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and	Semantics Description
New-Serial Number	O		9.2.3	

### 9.2.6 Service-Areas-List

Service-Area-List is an IE sent from the CN to the RNC. It indicates the group of Service-Area(s) that the message will be broadcast to. The Service-Area-List must include at least one Service-Area.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and	Semantics Description
Service Areas List		1 to <maxno of SAI>		
>Service-Area-Identifier	M		9.2.11	

Range bound	Explanation
MaxnoofSAI	Maximum no. of SAI in Service-Areas-List. Value is 65535

### 9.2.7 Category

This parameter is sent from the CN to the RNC, and is used to indicate the priority of the message.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and	Semantics Description
Category	O		Enumerated (High Priority, Background, Normal, or Default)	This IE contains the broadcast priority of the message.

### 9.2.8 Repetition-Period

This IE is sent from the CN to the RNC and indicates the periodicity of message broadcasts.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and	Semantics Description
Repetition-Period	M		INTEGER 1...4096	Range is 1 to 4096 where each unit will represent a repetition of one second to a maximum of once per ~1 hour

### 9.2.9 No-of-Broadcasts-Requested

This IE is sent from the CN to the RNC and indicates the number of times a message is to be broadcast.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and reference	Semantics Description
No-of-Broadcasts-Requested	M	0 to 65535	INTEGER 0.... 65535	This specifies the number of times the message is to be broadcast.

### 9.2.10 No-of-Broadcasts-Completed-List

This IE is sent from the RNC to the CN, and indicates the number of times that a CN message (all pages) has been sent to each Service-Area in the Service-Area-List for broadcast over the radio interface.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and reference	Semantics Description
No-of-Broadcasts-Completed-List		1 to <maxnoof SAI>		
>Service-Area-Identifier	M		OCTET STRING (7)	
>No-of-Broadcasts-Completed	M		INTEGER (0.. 65535 )	
>No-of-Broadcasts-Compl-Info	O		ENUMERATED (overflow, unknown)	

Range bound	Explanation
MaxnoofSAI	Maximum no. of SAI in Service-Area-List. Value is 65535

### 9.2.11 Service-Area-Identifier

This IE is sent from the Service Area Identifier (SAI) is used to uniquely identify an area consisting of one or more cells belonging to the same Location Area. Such an area is called a Service Area and can be used for indicating the location of a UE to the CN.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SAI				
>PLMN-ID	M		OCTET STRING (SIZE (3))	<ul style="list-style-type: none"> <li>- digits 0 to 9, two digits per octet,</li> <li>- each digit encoded 0000 to 1001,</li> <li>- 1111 used as filler</li> <li>- bit 4 to 1 of octet n encoding digit 2n-1</li> <li>- bit 8 to 5 of octet n encoding digit 2n</li> </ul> <p>-The PLMN-ID consists of 3 digits from MCC followed by either  -a filler plus 2 digits from MNC (in case of 2 digit MNC) or  -3 digits from MNC (in case of a 3 digit MNC).</p>
>LAC	M		OCTET STRING (2)	0000 and FFFE not allowed.
>SAC	M		OCTET STRING (2)	

### 9.2.12 Failure-List

This identifies the list of Service-Area(s) for which the RNC could not complete as requested.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and	Semantics Description
Failure-List		1 to <maxnoof SAI>		
>Service-Area-Identifier	M		9.2.11	
>Cause	M		9.2.14	

Range bound	Explanation
MaxnoofSAI	Maximum no. of SAI in Service-Area-List. Value is 65535

### 9.2.13 Radio-Resource-Loading-List

This Information Element presents the available bandwidth available for Broadcast purposes of a specific Service Area.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and	Semantics Description
Radio-Resource-Loading-List		1 to <maxnoof SAI>		
>Service-Area-Identifier	M		9.2.11	
>Available-Bandwidth	M		9.2.18	

Range bound	Explanation
MaxnoofSAI	Maximum no. of SAI in Service-Area-List. Value is 65535

### 9.2.14 Cause

The purpose of the cause information element is to indicate the reason for a particular event for the SABP protocol.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and Reference	Semantics Description
	M		ENUMERATED	
>Cause	O		Parameter-not-recognized Parameter-value-invalid Valid-CN-message-not-identified Service-Area-identity-not-valid Unrecognized-message Missing-mandatory-element RNC-capacity-exceeded RNC-memory-exceeded Service-Area-broadcast-not-	Sent when the recipient (CN or RNC) was unable to act upon the message received due to an unrecognized parameter. A message should not be rejected only because a parameter is not recognized as this would prevent extensions to the service  Sent when a failure occurred due to the value of a parameter being invalid, e.g. out of range, or in Write-Replace, the parameter "no of pages" does not equal the number of pages received  Sent when the RNC does not recognize the CN message reference  Sent when the RNC does not recognize a Service-Area Identity  Sent when the RNC did not recognize the message at all  Sent when a mandatory element is missing from the message  Sent when a write-replace fails because the RNC cannot meet the requested repetition period or when the set-drx parameters cannot be applied because of the cell loading  <b>Sent when the RNC is unable to</b>

IE/GROUP NAME	PRESENCE	RANGE	IE Type and Reference	Semantics Description
	M		ENUMERATED	
			<p>supported</p> <p>Service-Area-broadcast-not-operational</p> <p>Message-reference already-used</p> <p>Unspecified-error</p>	<p>store a CBS message as the RNC memory has been exceeded.</p> <p>Sent when the SABCH/CN related Radio Resource is not configured for a Service-Area</p> <p>Sent when the SABCH/CN related radio resource is not available because of error conditions or due to maintenance activities</p> <p>Sent when the recipient was unable to act upon the Write-Replace message received due to a previous Write-Replace received with the same message_reference.</p> <p>Sent when none of the above cause values apply.</p>

### 9.2.15 Data Coding Scheme

This IE is sent from the RNC to the CN and identifies the alphabet or coding employed for the message characters and message handling at the UE (it is passed transparently from the CN to the UE).

IE/GROUP NAME	PRESENCE	RANGE	IE Type and	Semantics Description
Data Coding Scheme	M		INTEGER (0..255)	

### 9.2.16 Recovery-Indication

This IE is used to indicate whether the CN related data was lost or is still available.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and	Semantics Description
Recovery-Indication	O		ENUMERATED (Available, Lost)	

### 9.2.17 Criticality-Diagnostics

IE/Group Name	Presence	Range	IE type and reference	Semantics description
<b>Criticality Diagnostics</b>				
>Procedure Code	O		INTEGER (0..255)	Procedure code is to be used if Criticality diagnostics is part of Error Indication procedure, and not within the response message of the same operation that caused the error
>Triggering Message	O		ENUMERATED(initiating message, successful outcome, unsuccessful outcome, outcome)	The Triggering Message is used only if the Criticality diagnostics is part of Error Indication procedure except when the procedure code is not understood.
>Criticality Response	O		ENUMERATED(reject, ignore, notify)	This Criticality response IE is used for reporting the Criticality of the Triggering message
<b>Information Element Criticality Diagnostics</b>		0 to <maxnoof errors>		
>Criticality Response	M		ENUMERATED(reject, ignore, notify)	The Criticality response IE is used for reporting the criticality of the triggering IE. The value 'ignore' shall not be used.
>IE Id	M		INTEGER (0..65535)	The IE Id of the not understood IE

Range bound	Explanation
Maxnooferrors	Maximum no. of IE errors allowed to be reported with a single message. The value for maxnooferrors is 256.

### 9.2.18 Available-Bandwidth

This IE is used to indicate the Bandwidth available for the broadcast of messages.

IE/GROUP NAME	PRESENCE	RANGE	IE Type and	Semantics Description
Available-Bandwidth	O		INTEGER (0...20480)	The unit is: bit/second

## 9.3 Message and Information Element Abstract Syntax (with ASN.1)

### 9.3.1 Usage of protocol extension mechanism for non-standard use

The protocol extension mechanism for non-standard use may be used:

- for special operator- (and/or vendor) specific features considered not to be part of the basic functionality, i.e. the functionality required for a complete and high-quality specification in order to guarantee multivendor interoperability.
- by vendors for research purposes, e.g. to implement and evaluate new algorithms/features before such features are proposed for standardisation.

The extension mechanism shall not be used for basic functionality. Such functionality shall be standardised.

### 9.3.2 Elementary Procedure Definitions

```
-- ****
-- Elementary Procedure definitions
--
-- ****
SABP-PDU-Descriptions -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- ****
-- IE parameter types from other modules.
--
-- ****

IMPORTS
    Criticality,
    ProcedureCode
FROM SABP-CommonDataTypes

    Error-Indication,
    Failure,
    Kill,
    Kill-Complete,
    Kill-Failure,
    Load-Query,
    Load-Query-Complete,
    Load-Query-Failure,
    Reset,
    Reset-Complete,
    Reset-Failure,
    Restart,
    Message-Status-Query,
    Message-Status-Query-Complete,
    Message-Status-Query-Failure,
    Write-Replace,
    Write-Replace-Complete,
    Write-Replace-Failure
FROM SABP-PDU-Contents

    id-Error-Indication,
    id-Failure-Indication,
    id-Kill,
    id-Reset,
    id-Restart-Indication,
    id-Status-Load-Enquiry,
    id-Status-Message-Query,
    id-Write-Replace
```

```
FROM SABP-Constants;

-- *****
-- 
-- Interface Elementary Procedure Class
-- 
-- *****

SABP-ELEMENTARY-PROCEDURE ::= CLASS {
    &InitiatingMessage           ,
    &SuccessfulOutcome          OPTIONAL,
    &UnsuccessfulOutcome        OPTIONAL,
    &procedureCode               ProcedureCode UNIQUE,
    &criticality                Criticality     DEFAULT ignore
}
WITH SYNTAX {
    INITIATING MESSAGE      &InitiatingMessage
    [ SUCCESSFUL OUTCOME ]
```

```

&SuccessfulOutcome]
  [UNSUCCESSFUL OUTCOME      &UnsuccessfulOutcome]
  PROCEDURE CODE            &procedureCode
  [CRITICALITY              &criticality]
}

-- *****
-- 
-- Interface PDU Definition
-- 
-- *****

SABP-PDU ::= CHOICE {
  initiatingMessage  InitiatingMessage,
  successfulOutcome   SuccessfulOutcome,
  unsuccessfulOutcome UnsuccessfulOutcome,
  ...
}

InitiatingMessage ::= SEQUENCE {
  procedureCode    SABP-ELEMENTARY-PROCEDURE.&procedureCode    ({SABP-ELEMENTARY-PROCEDURES}),
  criticality     SABP-ELEMENTARY-PROCEDURE.&criticality     ({SABP-ELEMENTARY-PROCEDURES}{@procedureCode}),
  value           SABP-ELEMENTARY-PROCEDURE.&InitiatingMessage ({SABP-ELEMENTARY-PROCEDURES}{@procedureCode})
}

SuccessfulOutcome ::= SEQUENCE {
  procedureCode    SABP-ELEMENTARY-PROCEDURE.&procedureCode    ({SABP-ELEMENTARY-PROCEDURES}),
  criticality     SABP-ELEMENTARY-PROCEDURE.&criticality     ({SABP-ELEMENTARY-PROCEDURES}{@procedureCode}),
  value           SABP-ELEMENTARY-PROCEDURE.&SuccessfulOutcome ({SABP-ELEMENTARY-PROCEDURES}{@procedureCode})
}

UnsuccessfulOutcome ::= SEQUENCE {
  procedureCode    SABP-ELEMENTARY-PROCEDURE.&procedureCode    ({SABP-ELEMENTARY-PROCEDURES}),
  criticality     SABP-ELEMENTARY-PROCEDURE.&criticality     ({SABP-ELEMENTARY-PROCEDURES}{@procedureCode}),
  value           SABP-ELEMENTARY-PROCEDURE.&UnsuccessfulOutcome ({SABP-ELEMENTARY-PROCEDURES}{@procedureCode})
}

-- *****
-- 
-- Interface Elementary Procedure List
-- 
-- *****

SABP-ELEMENTARY-PROCEDURES SABP-ELEMENTARY-PROCEDURE ::= {
  SABP-ELEMENTARY-PROCEDURES-CLASS-1 |
  SABP-ELEMENTARY-PROCEDURES-CLASS-2 ,
  ...
}

SABP-ELEMENTARY-PROCEDURES-CLASS-1 SABP-ELEMENTARY-PROCEDURE ::= {
  write-Replace      |
  kill               |
  status-Load-Enquiry |
  status-Message-Query |
}

```

```

reset
  ...
}

SABP-ELEMENTARY-PROCEDURES-CLASS-2 SABP-ELEMENTARY-PROCEDURE ::= {
  restart-Indication |
  failure-Indication |
  error-Indication |
  ...
}

write-Replace SABP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE Write-Replace
  SUCCESSFUL OUTCOME Write-Replace-Complete
  UNSUCCESSFUL OUTCOME Write-Replace-Failure
  PROCEDURE CODE id-Write-Replace
}

kill SABP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE Kill
  SUCCESSFUL OUTCOME Kill-Complete
  UNSUCCESSFUL OUTCOME Kill-Failure
  PROCEDURE CODE id-Kill
}

status-Load-Enquiry SABP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE Load-Query
  SUCCESSFUL OUTCOME Load-Query-Complete
  UNSUCCESSFUL OUTCOME Load-Query-Failure
  PROCEDURE CODE id-Status-Load-Enquiry
}

status-Message-Query SABP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE Message-Status-Query
  SUCCESSFUL OUTCOME Message-Status-Query-Complete
  UNSUCCESSFUL OUTCOME Message-Status-Query-Failure
  PROCEDURE CODE id-Status-Message-Query
}

reset SABP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE Reset
  SUCCESSFUL OUTCOME Reset-Complete
  UNSUCCESSFUL OUTCOME Reset-Failure
  PROCEDURE CODE id-Reset
}

restart-Indication SABP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE Restart
  PROCEDURE CODE id-Restart-Indication
}

failure-Indication SABP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE Failure
  PROCEDURE CODE id-Failure-Indication
}

```

```

error-Indication SABP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE Error-Indication
    PROCEDURE CODE      id-Error-Indication
}

```

END

### 9.3.3 PDU Definitions

```

-- ****
-- 
-- PDU definitions for SABP.
-- 

SABP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- ****
-- 
-- IE parameter types from other modules.
-- 

IMPORTS
    Broadcast-Message-Content,
    Category,
    Cause,
    Criticality-Diagnostics,
    Data-Coding-Scheme,
    Failure-List,
    Message-Identifier,
    New-Serial-Number,
    No-of-Broadcasts-Completed-List,
    No-of-Broadcasts-Requested,
    Old-Serial-Number,
    Radio-Resource-Loading-List,
    Recovery-Indication,
    Repetition-Period,
    Serial-Number ,
    Service-Areas-List
FROM SABP-IES

ProtocolExtensionContainer{},
ProtocolIE-Container{},
SABP-PROTOCOL-EXTENSION,
SABP-PROTOCOL-IES
FROM SABP-Containers

id-Broadcast-Message-Content,
id-Category,

```

```

id-Criticality-Diagnostics,
id-Cause,
id-Data-Coding-Scheme,
id-Failure-List,
id-Message-Identifier,
id-New-Serial-Number,
id-No-of-Broadcasts-Completed-List,
id-No-of-Broadcasts-Requested,
id-Old-Serial-Number,
id-Radio-Resource-Loading-List,
id-Recovery-Indication,
id-Repetition-Period,
id-Serial-Number,
id-Service-Areas-List
FROM SABP-Constants;

-- *****
-- 
-- Write-Replace
-- 

Write-Replace ::= SEQUENCE {
    protocolIEs      ProtocolIE-Container     { {Write-Replace-IEs} },
    protocolExtensions  ProtocolExtensionContainer { {Write-Replace-Extensions} } OPTIONAL,
    ...
}

Write-Replace-IEs SABP-PROTOCOL-IES ::= {
    { ID id-Message-Identifier CRITICALITY ignore TYPE Message-Identifier      PRESENCE mandatory } |
    { ID id-New-Serial-Number   CRITICALITY ignore TYPE NewSerial-Number        PRESENCE mandatory } |
    { ID id-Old-Serial-Number  CRITICALITY ignore TYPE Old-Serial-Number       PRESENCE optional } |
    { ID id-Service-Areas-List CRITICALITY ignore TYPE Service-Areas-List     PRESENCE mandatory } |
    { ID id-Category          CRITICALITY ignore TYPE Category                  PRESENCE optional } |
    { ID id-Repetition-Period CRITICALITY ignore TYPE Repetition-Period      PRESENCE optional } |
    { ID id-No-of-Broadcasts-Requested
        CRITICALITY ignore TYPE No-of-Broadcasts-Requested PRESENCE mandatory } |
    { ID id-Data-Coding-Scheme CRITICALITY ignore TYPE Data-Coding-Scheme      PRESENCE mandatory } |
    { ID id-Broadcast-Message-Content
        CRITICALITY ignore TYPE Broadcast-Message-Content  PRESENCE mandatory } ,
    ...
}

Write-Replace-Extensions SABP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- Write-Replace-Complete
-- 

Write-Replace-Complete ::= SEQUENCE {
    protocolIEs      ProtocolIE-Container     { {Write-Replace-Complete-IEs} },
    ...
}

```

```

protocolExtensions      ProtocolExtensionContainer { {Write-Replace-Complete-Extensions} } OPTIONAL,
...
}

Write-Replace-Complete-IEs SABP-PROTOCOL-IES ::= {
{ ID id-Message-Identifier CRITICALITY ignore TYPE Message-Identifier      PRESENCE mandatory } |
{ ID id-New-Serial-Number CRITICALITY ignore TYPE New-Serial-Number      PRESENCE mandatory } |
{ ID id-No-of-Broadcasts-Completed-List
          CRITICALITY ignore TYPE No-of-Broadcasts-Completed-List
                                PRESENCE mandatory } |
{ ID id-Criticality-Diagnostics
CRITICALITY ignore TYPE Criticality-Diagnostics      PRESENCE optional },
...
}

Write-Replace-Complete-Extensions SABP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
-- Write-Replace-Failure
-- *****

Write-Replace-Failure ::= SEQUENCE {
  protocolIEs      ProtocolIE-Container { {Write-Replace-Failure-IEs} },
  protocolExtensions      ProtocolExtensionContainer { {Write-Replace-Failure-Extensions} } OPTIONAL,
...
}

Write-Replace-Failure-IEs SABP-PROTOCOL-IES ::= {
{ ID id-Message-Identifier CRITICALITY ignore TYPE Message-Identifier      PRESENCE mandatory } |
{ ID id-New-Serial-Number CRITICALITY ignore TYPE New-Serial-Number      PRESENCE mandatory } |
{ ID id-Failure-List CRITICALITY ignore TYPE Failure-List      PRESENCE mandatory } |
{ ID id-No-of-Broadcasts-Completed-List
          CRITICALITY ignore TYPE No-of-Broadcasts-Completed-List
                                PRESENCE optional } |
{ ID id-Criticality-Diagnostics
CRITICALITY ignore TYPE Criticality-Diagnostics      PRESENCE optional },
...
}

Write-Replace-Failure-Extensions SABP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
-- Kill
-- *****

Kill ::= SEQUENCE {
  protocolIEs      ProtocolIE-Container { {Kill-IEs} },
  protocolExtensions      ProtocolExtensionContainer { {Kill-Extensions} }
OPTIONAL,
```

```

}

Kill-IES SABP-PROTOCOL-IES ::= {
  { ID id-Message-Identifier CRITICALITY ignore TYPE Message-Identifier
    PRESENCE mandatory } |
  { ID id-Old-Serial-Number CRITICALITY ignore TYPE Old-Serial-Number
    PRESENCE mandatory } |
  { ID id-Service-Areas-List CRITICALITY ignore TYPE Service-Areas-List
    PRESENCE mandatory } ,
  ...
}

Kill-Extensions SABP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- Kill-Complete
-- 
-- *****

Kill-Complete ::= SEQUENCE {
  protocolIEs      ProtocolIE-Container     {{Kill-Complete-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{Kill-Complete-Extensions}}   OPTIONAL,
  ...
}

Kill-Complete-IEs SABP-PROTOCOL-IES ::= {
  { ID id-Message-Identifier CRITICALITY ignore TYPE Message-Identifier      PRESENCE mandatory } |
  { ID id-Old-Serial-Number CRITICALITY ignore TYPE Old-Serial-Number      PRESENCE mandatory } |
  { ID id-No-of-Broadcasts-Completed-List
    CRITICALITY ignore      TYPE No-of-Broadcasts-Completed-List
    PRESENCE mandatory } |
  { ID id-Criticality-Diagnostics
    CRITICALITY ignore      TYPE Criticality-Diagnostics      PRESENCE optional },
  ...
}

Kill-Complete-Extensions SABP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- Kill-Failure
-- 
-- *****

Kill-Failure ::= SEQUENCE {
  protocolIEs      ProtocolIE-Container     {{Kill-Failure-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{Kill-Failure-Extensions}}   OPTIONAL,
  ...
}

Kill-Failure-IEs SABP-PROTOCOL-IES ::= {
  { ID id-Message-Identifier CRITICALITY ignore TYPE Message-Identifier      PRESENCE mandatory } |
  ...
}

```

```

{ ID id-Old-Serial-Number CRITICALITY ignore TYPE Old-Serial-Number PRESENCE mandatory } |
{ ID id-Failure-List CRITICALITY ignore TYPE Failure-List PRESENCE mandatory } |
{ ID id-No-of-Broadcasts-Completed-List
    CRITICALITY ignore TYPE No-of-Broadcasts-Completed-List
    PRESENCE optional } |

{ ID id-Criticality-Diagnostics
    CRITICALITY ignore TYPE Criticality-Diagnostics PRESENCE optional },
    ...
}

Kill-Failure-Extensions SABP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- Load-Query
-- 
-- *****

Load-Query ::= SEQUENCE {
    protocolIEs ProtocolIE-Container {{Load-Query-IEs}},
    protocolExtensions ProtocolExtensionContainer {{Load-Query-Extensions}} OPTIONAL,
    ...
}

Load-Query-IEs SABP-PROTOCOL-IES ::= {
    { ID id-Service-Areas-List CRITICALITY ignore TYPE Service-Areas-List PRESENCE mandatory } ,
    ...
}

Load-Query-Extensions SABP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- Load-Query-Complete
-- 
-- *****

Load-Query-Complete ::= SEQUENCE {
    protocolIEs ProtocolIE-Container {{Load-Query-Complete-IEs}},
    protocolExtensions ProtocolExtensionContainer {{Load-Query-Complete-Extensions}} OPTIONAL,
    ...
}

Load-Query-Complete-IEs SABP-PROTOCOL-IES ::= {
    { ID id-Radio-Resource-Loading-List
        CRITICALITY ignore TYPE Radio-Resource-Loading-List
        PRESENCE mandatory } |
    { ID id-Criticality-Diagnostics
        CRITICALITY ignore TYPE Criticality-Diagnostics PRESENCE optional },
    ...
}

```

```

Load-Query-Complete-Extensions SABP-PROTOCOL-EXTENSION ::= {
}

-- ****
-- 
-- Load-Query-Failure
-- 
-- ****

Load-Query-Failure ::= SEQUENCE {
    protocolIEs      ProtocolIE-Container     {{Load-Query-Failure-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{Load-Query-Failure-Extensions}} OPTIONAL,
}
... 

Load-Query-Failure-IEs SABP-PROTOCOL-IES ::= {
    { ID id-Service-Areas-List CRITICALITY ignore TYPE Service-Areas-List PRESENCE mandatory } |
    { ID id-Failure-List CRITICALITY ignore TYPE Failure-List PRESENCE mandatory } |
    { ID id-Radio-Resource-Loading-List
        CRITICALITY ignore TYPE Radio-Resource-Loading-List
        PRESENCE optional } |
    { ID id-Criticality-Diagnostics
        CRITICALITY ignore TYPE Criticality-Diagnostics PRESENCE optional },
    ...
}

Load-Query-Failure-Extensions SABP-PROTOCOL-EXTENSION ::= {
}
... 

-- ****
-- 
-- Message-Status-Query
-- 
-- ****

Message-Status-Query ::= SEQUENCE {
    protocolIEs      ProtocolIE-Container     {{Message-Status-Query-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{Message-Status-Query-Extensions}} OPTIONAL,
}
... 

Message-Status-Query-IEs SABP-PROTOCOL-IES ::= {
    { ID id-Message-Identifier CRITICALITY ignore TYPE Message-Identifier PRESENCE mandatory } |
    { ID id-Old-Serial-Number CRITICALITY ignore TYPE Old-Serial-Number PRESENCE mandatory } |
    { ID id-Service-Areas-List CRITICALITY ignore TYPE Service-Areas-List PRESENCE mandatory } ,
}
... 

Message-Status-Query-Extensions SABP-PROTOCOL-EXTENSION ::= {
}
...
}

```

```

-- ****
-- 
-- Message-Status-Query-Complete
-- 
-- ****

Message-Status-Query-Complete ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{Message-Status-Query-Complete-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{Message-Status-Query-Complete-Extensions}} OPTIONAL,
    ...
}

Message-Status-Query-Complete-IEs SABP-PROTOCOL-IES ::= {
    { ID id-Message-Identifier CRITICALITY ignore TYPE Message-Identifier      PRESENCE mandatory } |
    { ID id-Old-Serial-Number   CRITICALITY ignore TYPE Old-Serial-Number       PRESENCE mandatory } |
    { ID id-No-of-Broadcasts-Completed-List
        CRITICALITY ignore TYPE No-of-Broadcasts-Completed-List
                                PRESENCE mandatory } |
    { ID id-Criticality-Diagnostics
        CRITICALITY ignore TYPE Criticality-Diagnostics      PRESENCE optional },
    ...
}

Message-Status-Query-Complete-Extensions SABP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- 
-- Message-Status-Query-Failure
-- 
-- ****

Message-Status-Query-Failure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{Message-Status-Query-Failure-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{Message-Status-Query-Failure-Extensions}} OPTIONAL,
    ...
}

Message-Status-Query-Failure-IEs SABP-PROTOCOL-IES ::= {
    { ID id-Message-Identifier CRITICALITY ignore TYPE Message-Identifier      PRESENCE mandatory } |
    { ID id-Failure-List     CRITICALITY ignore TYPE Failure-List           PRESENCE mandatory } |
    { ID id-Old-Serial-Number   CRITICALITY ignore TYPE Old-Serial-Number       PRESENCE mandatory } |
    { ID id-No-of-Broadcasts-Completed-List
        CRITICALITY ignore TYPE No-of-Broadcasts-Completed-List
                                PRESENCE optional } |
    { ID id-Criticality-Diagnostics
        CRITICALITY ignore TYPE Criticality-Diagnostics      PRESENCE optional },
    ...
}

Message-Status-Query-Failure-Extensions SABP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

}

-- *****
-- 
-- Reset
-- 
-- *****

Reset ::= SEQUENCE {
    protocolIES      ProtocolIE-Container      {{Reset-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{Reset-Extensions}}   OPTIONAL,
    ...
}

Reset-IEs SABP-PROTOCOL-IES ::= {
    { ID id-Service-Areas-List  CRITICALITY ignore  TYPE Service-Areas-List      PRESENCE mandatory } ,
    ...
}

Reset-Extensions SABP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- Reset-Complete
-- 
-- *****

Reset-Complete ::= SEQUENCE {
    protocolIES      ProtocolIE-Container      {{Reset-Complete-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{Reset-Complete-Extensions}}   OPTIONAL,
    ...
}

Reset-Complete-IEs SABP-PROTOCOL-IES ::= {
    { ID id-Service-Areas-List  CRITICALITY ignore  TYPE Service-Areas-List      PRESENCE mandatory } |
    { ID id-Criticality-Diagnostics      PRESENCE optional },
    ...
}

Reset-Complete-Extensions SABP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- Reset-Failure
-- 
-- *****

Reset-Failure ::= SEQUENCE {
    protocolIES      ProtocolIE-Container      {{Reset-Failure-IEs}},
    protocolExtensions  ProtocolExtensionContainer {{Reset-Failure-Extensions}}   OPTIONAL,
}

```

```

}

Reset-Failure-IES SABP-PROTOCOL-IES ::= {
  { ID id-Failure-List      CRITICALITY ignore  TYPE Failure-List      PRESENCE mandatory } |
  { ID id-Service-Areas-List CRITICALITY ignore  TYPE Service-Areas-List  PRESENCE optional  } |
{ ID id-Criticality-Diagnostics
CRITICALITY ignore  TYPE Criticality-Diagnostics  PRESENCE optional } ,
  ...
}

Reset-Failure-Extensions SABP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- Restart
-- 
-- *****

Restart ::= SEQUENCE {
  protocolIES          ProtocolIE-Container    {{Restart-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{Restart-Extensions}}  OPTIONAL,
  ...
}

Restart-IEs SABP-PROTOCOL-IES ::= {
  { ID id-Service-Areas-List  CRITICALITY ignore  TYPE Service-Areas-List  PRESENCE mandatory } |
  { ID id-Recovery-Indication CRITICALITY ignore  TYPE Recovery-Indication PRESENCE optional  } ,
  ...
}

Restart-Extensions SABP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- Failure
-- 
-- *****

Failure ::= SEQUENCE {
  protocolIES          ProtocolIE-Container    {{Failure-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{Failure-Extensions}}  OPTIONAL,
  ...
}

Failure-IEs SABP-PROTOCOL-IES ::= {
  { ID id-Service-Areas-List  CRITICALITY ignore  TYPE Service-Areas-List  PRESENCE mandatory } ,
  ...
}

Failure-Extensions SABP-PROTOCOL-EXTENSION ::= {

```

```

}

-- *****
-- Error-Indication
-- *****

Error-Indication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{Error-Indication-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{Error-Indication-Extensions}} OPTIONAL,
    ...
}

Error-Indication-IEs SABP-PROTOCOL-IES ::= {
    { ID id-Message-Identifier CRITICALITY ignore TYPE Message-Identifier PRESENCE mandatory } |
    { ID id-Serial-Number     CRITICALITY ignore TYPE Serial-Number   PRESENCE optional } |
    { ID id-Cause            CRITICALITY ignore TYPE Cause           PRESENCE optional } |
    { ID id-Criticality-Diagnostics
        CRITICALITY ignore TYPE Criticality-Diagnostics PRESENCE optional },
    ...
}

Error-Indication-Extensions SABP-PROTOCOL-EXTENSION ::= {
    ...
}

END

```

#### Information Element Definitions

```

-- *****
-- Information Element Definitions
-- *****


```

```

SABP-IES -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=


```

BEGIN

```

IMPORTS
    maxRadio-Resource-Loading-List,
    maxFailure-List,
    maxNo-of-Broadcasts-Completed-List,
    maxNrOfErrors,
    maxService-Areas-List
FROM SABP-Constants

    Criticality,
    ProcedureCode,

```

```

TriggeringMessage,
ProtocolIE-ID
FROM SABP-CommonDataTypes

ProtocolExtensionContainer{},-

SABP-PROTOCOL-EXTENSION
FROM SABP-Containers;

-- A

Available-Bandwidth      ::= INTEGER (0..20480)
-- bits/sec

-- B

Broadcast-Message-Content ::= OCTET STRING (SIZE (1246))
-- This IE is sent from the CN to the RNC containing user information i.e.
-- the message.

-- C

Category ::= ENUMERATED {
    high-priority,
    background-priority,
    normal-priority,
    default-priority,
    ...
}

Cause      ::= INTEGER {
    parameter-not-recognised      (0),
    parameter-value-invalid       (1),
    valid-CN-message-not-identified (2),
    service-area-identity-not-valid (3),
    unrecognised-message          (4),
    missing-mandatory-element    (5),
    bss-capacity-exceeded        (6),
    rNC-memory-exceeded          (7),
    service-area-broadcast-not-supported (8),
    service-area-broadcast-not-operational (9),
    incompatible-DRX-parameter (10),
    message-reference-already-used (11),
    unspecified-error            (12) } (0..255)

Criticality-Diagnostics      ::= SEQUENCE {
    procedureCode      ProcedureCode      OPTIONAL,
    triggeringMessage  TriggeringMessage  OPTIONAL,
    criticalityResponse Criticality       OPTIONAL,
    iEsCriticalityResponses CriticalityDiagnostics-IE-List OPTIONAL,
    iE-Extensions      ProtocolExtensionContainer { {CriticalityDiagnostics-ExtIEs} } OPTIONAL,
    ...
}

```

```

}

CriticalityDiagnostics-ExtIEs SABP-PROTOCOL-EXTENSION ::= {
    ...
}

CriticalityDiagnostics-IE-List ::= SEQUENCE (SIZE (1..maxNrOfErrors)) OF
    SEQUENCE {
        criticalityResponse      Criticality,
        iE-ID                   ProtocolIE-ID,
        iE-Extensions           ProtocolExtensionContainer { {CriticalityDiagnostics-IE-List-ExtIEs} } OPTIONAL,
        ...
    }

CriticalityDiagnostics-IE-List-ExtIEs SABP-PROTOCOL-EXTENSION ::= {
    ...
}

-- D

Data-Coding-Scheme          ::= INTEGER (0..255)

-- E

-- F

Failure-List ::= SEQUENCE (SIZE (1..maxFailure-List)) OF Failure-List-Item

Failure-List-Item ::= SEQUENCE {
    service-area-identifier   Service-Area-Identifier,
    cause                     Cause,
    iE-Extensions             ProtocolExtensionContainer { {FailureList-ItemIE-ExtIEs} } OPTIONAL,
    ...
}

FailureList-ItemIE-ExtIEs SABP-PROTOCOL-EXTENSION ::= {
}
-- G
-- H
-- I
-- J
-- K
-- L
-- M

Message-Identifier ::= OCTET STRING (SIZE (2))

```

```

-- This IE identifies the source/type of a CN message and is passed
-- transparently from the CN to the UE.

-- N

New-Serial-Number ::= Serial-Number

No-of-Broadcasts-Completed-List ::= SEQUENCE (SIZE (1..maxNo-of-Broadcasts-Completed-List)) OF
    No-of-Broadcasts-Completed-List-Item

No-of-Broadcasts-Completed-List-Item ::= SEQUENCE {
    service-area-identifier      Service-Area-Identifier,
    no-of-broadcasts-compl     INTEGER (0..65535),
    no-of-broadcasts-compl-info No-Of-Broadcasts-Compl-Info      OPTIONAL,
    iE-Extensions       ProtocolExtensionContainer { {NoOfBroadcastsCompletedListItemIE-ExtIEs} } OPTIONAL,
    ...
}

NoOfBroadcastsCompletedListItemIE-ExtIEs SABP-PROTOCOL-EXTENSION ::= {
...
}

No-Of-Broadcasts-Compl-Info ::= ENUMERATED {
    overflow,
    unknown,
    ...
}

No-of-Broadcasts-Requested ::= INTEGER {
    broadcast-indefinitely (0)
} (0..65535)

-- O

Old-Serial-Number ::= Serial-Number

-- P

-- Q

-- R

Radio-Resource-Loading-List ::= SEQUENCE (SIZE (1..maxRadio-Resource-Loading-List)) OF
    Radio-Resource-Loading-List-Item

Radio-Resource-Loading-List-Item ::= SEQUENCE {
    service-area-identifier      Service-Area-Identifier,
    available-bandwidth     Available-Bandwidth,
    iE-Extensions       ProtocolExtensionContainer { {RadioResourceLoadingListItemIE-ExtIEs} } OPTIONAL,
    ...
}

RadioResourceLoadingListItemIE-ExtIEs SABP-PROTOCOL-EXTENSION ::= {
...
}

```

```

Recovery-Indication ::= ENUMERATED {
    data-lost,
    data-available
}

Repetition-Period      ::= INTEGER (1..4096)
-- Each unit represents a repetition of one second to a maximum of
-- once per 4096 seconds (~1 hour).

-- S

Serial-Number          ::= INTEGER (0..65535)

Service-Area-Identifier ::= SEQUENCE {
    plmn-id
        OCTET STRING (SIZE (3))
        -- Digits 0 to 9, two digits per octet.          --
        -- Each octet encoded 0000 to 1001.              --
        -- 1111 used as filler                          --
        -- Bit 4 to 1 of octet n encoding digit 2n-1.   --
        -- Bit 8 to 5 of octet n encoding digit 2n.     --
        -- The PLMN-ID consists of 3 digits from MCC   --
        -- followed by either a filler plus 2 digits   --
        -- from MNC (in case of 2 digit MNC) or 3 digits --
        -- from MNC (in case of 3 digit MNC).           --
    lac
        OCTET STRING (SIZE (2))
        -- 0000 and FFFE not allowed                  --
    sac
        OCTET STRING (SIZE (2))
}

-- **TODO** The IE type for these parameters is not known as yet
Service-Areas-List ::= SEQUENCE (SIZE (1..maxService-Areas-List)) OF Service-Area-Identifier

```

```

-- T
-- U
-- V
-- W
-- X
-- Y
END

```

### 9.3.4 Common Definitions

```
-- ****
-- 
```

```
-- Common definitions
--
-- ****
SABP-CommonDataTypes -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=
BEGIN
    Criticality      ::= ENUMERATED { reject, ignore, notify }
    Presence        ::= ENUMERATED { optional, conditional, mandatory }
    ProcedureCode   ::= INTEGER (0..255)
    ProtocolExtensionID ::= INTEGER (0..65535)
    ProtocolIE-ID    ::= INTEGER (0..65535)
    TriggeringMessage ::= ENUMERATED { initiating-message, successful-outcome, unsuccessful-outcome,...}
END
```

### 9.3.5 Constant Definitions

```
-- ****
-- Constant definitions
--
-- ****
SABP-Constants -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=
BEGIN
    --
    -- Elementary Procedures
    --
    -- ****
    id-Write-Replace          INTEGER ::= 0
    id-Kill                  INTEGER ::= 1
    id-Status-Load-Enquiry    INTEGER ::= 2
    id-Status-Message-Query   INTEGER ::= 3
    id-Restart-Indication     INTEGER ::= 4
    id-Reset                 INTEGER ::= 5
    id-Failure-Indication    INTEGER ::= 6
    id>Error-Indication      INTEGER ::= 7
    --
    -- IEs
```

```

-- ****
-- ***** id-Broadcast-Message-Content      INTEGER ::= 0
id-Category          INTEGER ::= 1
id-Cause              INTEGER ::= 2
id-Criticality-Diagnostics  INTEGER ::= 3
id-Data-Coding-Scheme    INTEGER ::= 4
id-Failure-List        INTEGER ::= 5
id-Message-Identifier   INTEGER ::= 6
id-New-Serial-Number    INTEGER ::= 7
id-No-of-Broadcasts-Completed-List  INTEGER ::= 8
id-No-of-Broadcasts-Requested    INTEGER ::= 9
id-Old-Serial-Number       INTEGER ::= 10
id-Radio-Resource-Loading-List  INTEGER ::= 11
id-Recovery-Indication     INTEGER ::= 12
id-Repetition-Period      INTEGER ::= 13
id-Serial-Number          INTEGER ::= 14
id-Service-Areas-List     INTEGER ::= 15

-- ****
-- Extension constants
-- ****

-- Lists
-- ****

maxRadio-Resource-Loading-List  INTEGER ::= 65535
maxFailure-List                INTEGER ::= 65535
maxNo-of-Broadcasts-Completed-List  INTEGER ::= 65535
maxNrOfErrors                  INTEGER ::= 256
maxService-Areas-List          INTEGER ::= 65535

maxProtocolExtensions          INTEGER ::= 65535
maxProtocolIEs                 INTEGER ::= 65535

END

```

### 9.3.6 Container Definitions

```

-- ****
-- Container definitions
-- ****

SABP-Containers -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

```

```

BEGIN

-- *****
-- IE parameter types from other modules.
--
-- *****

IMPORTS
    Criticality,
    Presence,
    ProtocolExtensionID,
    ProtocolIE-ID
FROM SABP-CommonDataTypes

    maxProtocolExtensions,
    maxProtocolIEs
FROM SABP-Constants;

-- *****
-- Class Definition for Protocol IEs
--
-- *****

SABP-PROTOCOL-IES ::= CLASS {
    &id          ProtocolIE-ID      UNIQUE,
    &criticality   Criticality     DEFAULT ignore,
    &Value,
    &presence       Presence
}
WITH SYNTAX {
    ID           &id
    CRITICALITY &criticality
    TYPE         &Value
    PRESENCE     &presence
}

-- *****
-- Class Definition for Protocol Extensions
--
-- *****

SABP-PROTOCOL-EXTENSION ::= CLASS {
    &id          ProtocolExtensionID      UNIQUE,
    &criticality   Criticality     DEFAULT ignore,
    &Extension
}
WITH SYNTAX {
    ID           &id
    CRITICALITY &criticality
    EXTENSION    &Extension
}

```

```

-- ****
-- Container for Protocol IEs
-- ****

ProtocolIE-Container {SABP-PROTOCOL-IES : IEsSetParam} ::==
SEQUENCE (SIZE (0..maxProtocolIEs)) OF
ProtocolIE-Field {{IEsSetParam}}


ProtocolIE-Field {SABP-PROTOCOL-IES : IEsSetParam} ::= SEQUENCE {
  id          SABP-PROTOCOL-IES.&id          {{IEsSetParam}},
  criticality SABP-PROTOCOL-IES.&criticality {{IEsSetParam}}{@id},
  value        SABP-PROTOCOL-IES.&Value       {{IEsSetParam}}{@id}
}

-- ****
-- Container Lists for Protocol IE Containers
-- ****

ProtocolIE-ContainerList {INTEGER : lowerBound, INTEGER : upperBound, SABP-PROTOCOL-IES : IEsSetParam} ::==
SEQUENCE (SIZE (lowerBound..upperBound)) OF
ProtocolIE-Container {{IEsSetParam}}


-- ****
-- Container for Protocol Extensions
-- ****

ProtocolExtensionContainer {SABP-PROTOCOL-EXTENSION : ExtensionSetParam} ::==
SEQUENCE (SIZE (1..maxProtocolExtensions)) OF
ProtocolExtensionField {{ExtensionSetParam}}


ProtocolExtensionField {SABP-PROTOCOL-EXTENSION : ExtensionSetParam} ::= SEQUENCE {
  id          SABP-PROTOCOL-EXTENSION.&id          {{ExtensionSetParam}},
  criticality SABP-PROTOCOL-EXTENSION.&criticality {{ExtensionSetParam}}{@id},
  extensionValue SABP-PROTOCOL-EXTENSION.&Extension {{ExtensionSetParam}}{@id}
}

END

```

## 10 Handling of Unknown, Unforeseen or Erroneous Protocol Data

### 10.1 General

Protocol Error cases can be divided into three classes:

- Transfer Syntax Error;
- Abstract Syntax Error;
- Logical Error.

### 10.2 Transfer Syntax Error

A Transfer Syntax Error occurs when the receiver is not able to decode the received message i.e. the transfer syntax can not be opened. If Transfer Syntax Error occurs, the receiver should initiate Error Indication procedure with appropriate cause value for the protocol error.

### 10.3 Abstract Syntax Error

#### 10.3.1 General

In the SABP messages there is criticality information set for individual IEs and/or IE groups. This criticality information instructs the receiver how to act when receiving an IE or an IE group that is not comprehended i.e. the entire item (IE or IE group) which is not (fully or partially) comprehended shall be treated in accordance with its own criticality information as specified in subclause 10.3.2. An IE/IE group shall be regarded as not comprehended if the receiving node either cannot decode the IE/IE Group or does not comprehend the function represented by the IE value. The case of the not comprehended IE/IE group is an Abstract Syntax Error.

If an Abstract Syntax Error occurs, the receiver shall read the remaining message and shall then for each detected Abstract Syntax Error act according to the Criticality Information for the IE/IE group due to which Abstract Syntax Error occurred in accordance with subclause 10.3.2.

The receiving node shall take different actions depending on the value of the Criticality Information. The three possible values of the Criticality Information for an IE/IE group are:

- Reject IE;
- Ignore IE and Notify Sender;
- Ignore IE.

#### 10.3.2 Handling of the Criticality Information at Reception

##### 10.3.2.1 Procedure Code

The receiving node shall treat the different types of criticality information of the *Procedure Code* according to the following:

Reject IE:

- If a message is received with a *Procedure Code* marked with "Reject IE" which the receiving node does not comprehend, the receiving node shall reject the procedure using the Error Indication procedure.

Ignore IE and Notify Sender:

- If a message is received with a *Procedure Code* marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall ignore the procedure and initiate the Error Indication procedure.

Ignore IE:

- If a message is received with a *Procedure Code* marked with "*Ignore IE*" which the receiving node does not comprehend, the receiving node shall ignore the procedure.

### 10.3.2.2 IEs other than the Procedure Code

The receiving node shall treat the different types of criticality information of an IE/IE group other than the *Procedure Code* according to the following:

Reject IE:

- If a message *initiating* a procedure is received containing one or more Ies/IE groups marked with "*Reject IE*" which the receiving node does not comprehend; none of the functional requests of the message shall be executed. The receiving node shall reject the procedure and report the rejection of one or more Ies/IE groups using the message normally used to report unsuccessful outcome of the procedure.
- If a message *initiating* a procedure that does not have a message to report unsuccessful outcome is received containing one or more Ies/IE groups marked with "*Reject IE*" which the receiving node does not comprehend, the receiving node shall initiate the Error Indication procedure.
- If a *response* message is received containing one or more IEs marked with "*Reject IE*" which the receiving node does no comprehend, the receiving node shall initiate local error handling.

Ignore IE and Notify Sender:

- If a message *initiating* a procedure is received containing one or more Ies/IE groups marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall ignore the content of the not comprehended IEs/IE groups, continue with the procedure as if the not comprehended IEs/IE groups were not received (except for the reporting) using only the understood IEs/IE groups, and report in the response message of the procedure that one or more IEs/IE groups have been ignored.
- If a *response* message is received containing one or more IEs/IE groups marked with "*Ignore IE and Notify Sender*" which the receiving node does not comprehend, the receiving node shall ignore the content of the not comprehended IE/IE groups and initiate the Error Indication procedure.

Ignore IE:

- If a message *initiating* a procedure is received containing one or more IEs/IE groups marked with "*Ignore IE*" which the receiving node does not comprehend, the receiving node shall ignore the content of the not comprehended IEs/IE groups and continue with the procedure as if the not comprehended IEs/IE groups were not received using only the understood IEs/IE groups.

## 10.4 Logical Error

Logical error situations occur when a message is comprehended correctly, but the information contained within the message is not valid (i.e. semantic error), or describes a procedure which is not compatible with the state of the receiver. In these conditions, the following behaviour shall be performed (unless otherwise specified) as defined by the class of the elementary procedure, irrespective of the criticality information of the IE's/IE groups containing the erroneous values.

Class 1:

Where the logical error occurs in a request message of a class 1 procedure, and the procedure has a failure message, the failure message shall be sent with an appropriate cause value. Typical cause values are:

- Semantic Error;
- Message not compatible with receiver state.

Where the logical error is contained in a request message of a class 1 procedure, and the procedure does not have a failure message, the ERROR INDICATION procedure shall be initiated with an appropriate cause value.

Where the logical error exists in a response message of a class 1 procedure, local error handling shall be initiated.

Class 2:

Where the logical error occurs in a message of a class 2 procedure, the ERROR INDICATION procedure shall be initiated with an appropriate cause value.

---

## Annex A (informative): Change history

Change history					
TSG RAN#	Version	CR	Tdoc RAN	New Version	Subject/Comment
RAN_07	-	-	-	3.0.0	Approved at TSG RAN #7 and placed under Change Control
Rapporteur for TS 25.419 is:					
Brendan McWilliams Vodafone Airtouch Tel: +44 1635 676264 Fax: +44 1635 523615 E-Mail: <a href="mailto:brendan.mcwilliams@vf.vodafone.co.uk">brendan.mcwilliams@vf.vodafone.co.uk</a>					

---

## History

<b>Document history</b>		
V3.0.0	March 2000	Publication