


# ETSI TS 125 433 V3.0.0 (2000-01)

*Technical Specification*

**Universal Mobile Telecommunications System (UMTS);  
UTRAN Iub Interface NBAP Signalling  
(3G TS 25.433 version 3.0.0 Release 1999)**

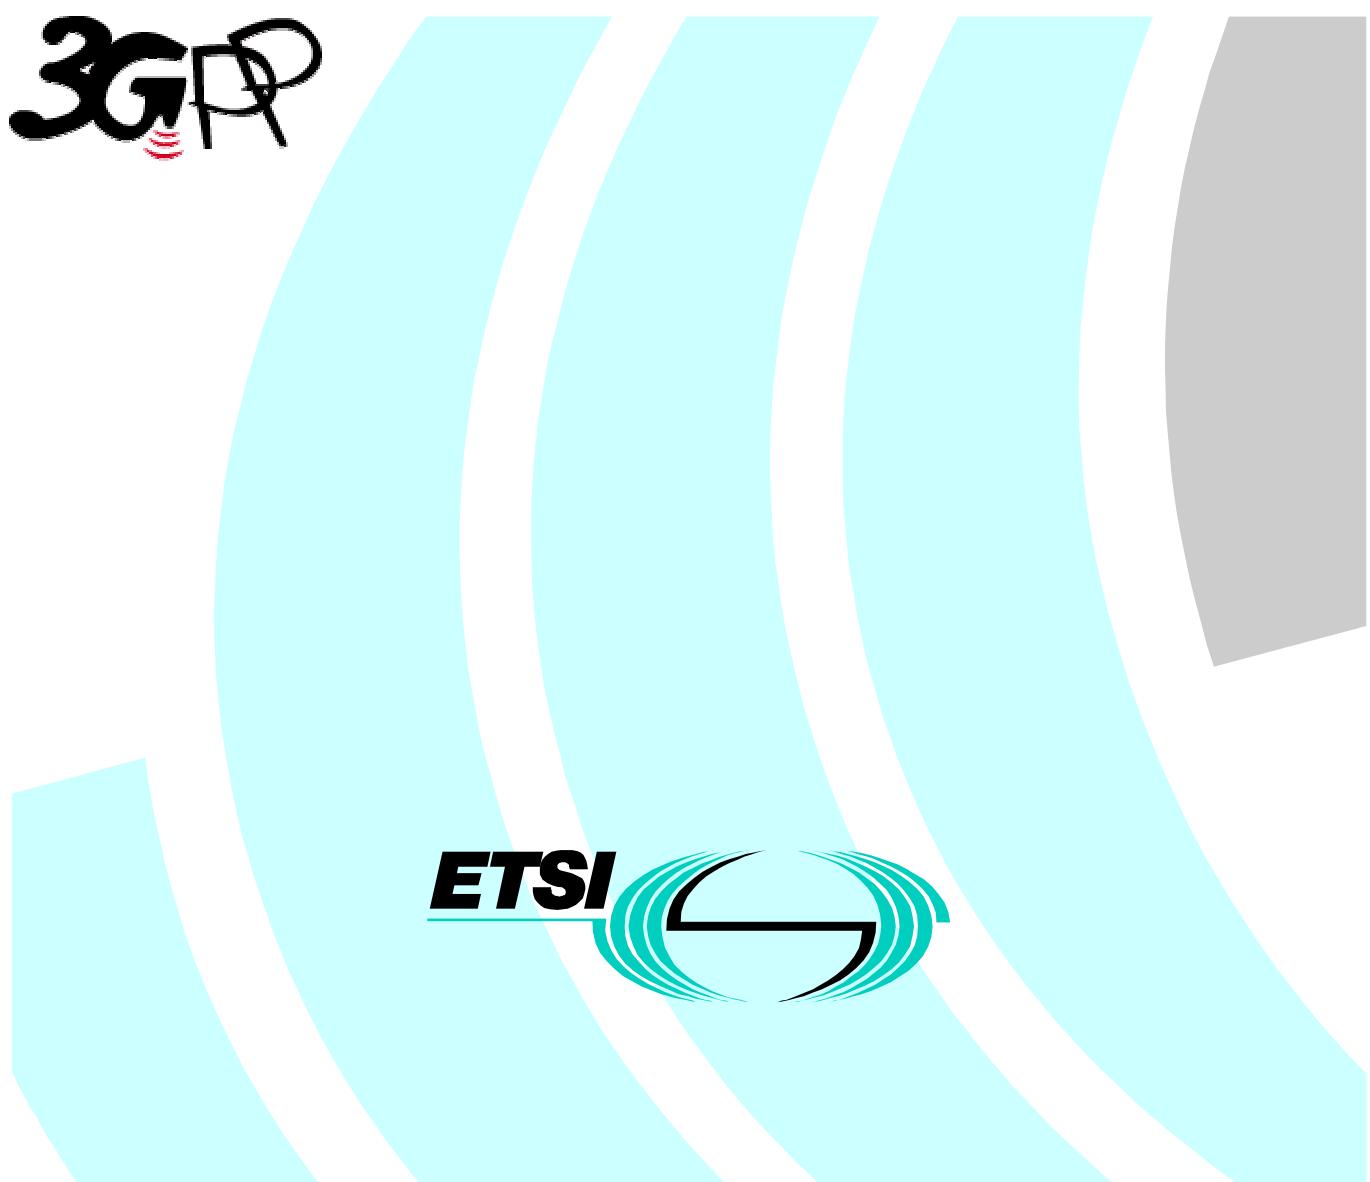

---

Reference

DTS/TSGR-0325433U

---

Keywords

UMTS

***ETSI***

---

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

---

Office address650 Route des Lucioles - Sophia Antipolis  
Valbonne - FRANCETel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16  
Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

Internet

secretariat@etsi.fr

Individual copies of this ETSI deliverable  
can be downloaded from  
<http://www.etsi.org>If you find errors in the present document, send your  
comment to: editor@etsi.fr

---

***Important notice***

This ETSI deliverable may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).

In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

---

***Copyright Notification***

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.  
All rights reserved.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Specification (TS) has been produced by the ETSI 3<sup>rd</sup> Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables. The mapping of document identities is as follows:

For 3GPP documents:

3G TS | TR nn.nnn "<title>" (with or without the prefix 3G)

is equivalent to

ETSI TS | TR 1nn nnn "[Digital cellular telecommunications system (Phase 2+) (GSM);] Universal Mobile Telecommunications System; <title>

For GSM document identities of type "GSM xx.yy", e.g. GSM 01.04, the corresponding ETSI document identity may be found in the Cross Reference List on [www.etsi.org/key](http://www.etsi.org/key)

---

## Contents

Foreword .....	10
1 Scope.....	11
2 References.....	11
3 Definitions, symbols and abbreviations.....	11
3.1 Definitions .....	11
3.2 Symbols .....	12
3.3 Abbreviations.....	12
4 General.....	13
4.1 Procedure Specification Principles .....	13
4.2 Forwards and Backwards Compatibility.....	13
5 NBAP Services .....	13
6 Services Expected from Signalling Transport .....	13
7 Functions of NBAP.....	13
8 NBAP Procedures .....	14
8.1 Elementary Procedures .....	14
8.2 NBAP Common Procedures .....	16
8.2.1 Common Transport Channel Setup .....	16
8.2.1.1 General .....	16
8.2.1.2 Successful Operation .....	16
8.2.1.3 Unsuccessful Operation.....	17
8.2.1.4 Abnormal Conditions .....	18
8.2.2 Common Transport Channel Reconfigure.....	18
8.2.2.1 General .....	18
8.2.2.2 Successful Operation .....	18
8.2.2.3 Unsuccessful Operation.....	20
8.2.2.4 Abnormal Conditions .....	20
8.2.3 Common Transport Channel Delete .....	20
8.2.3.1 General .....	20
8.2.3.2 Successful Operation .....	21
8.2.3.3 Unsuccessful Operation.....	21
8.2.3.4 Abnormal Conditions .....	21
8.2.4 Block Resource .....	21
8.2.4.1 General .....	21
8.2.4.2 Successful Operation .....	22
8.2.4.3 Unsuccessful Operation.....	22
8.2.4.4 Abnormal Conditions .....	23
8.2.5 Unblock Resource .....	23
8.2.5.1 General .....	23
8.2.5.2 Successful Operation .....	23
8.2.5.3 Abnormal Conditions .....	23
8.2.6 Audit Required .....	23
8.2.6.1 General .....	23
8.2.6.2 Successful Operation .....	24
8.2.6.3 Abnormal Conditions .....	24
8.2.7 Audit.....	24
8.2.7.1 General .....	24
8.2.7.2 Successful Operation.....	24
8.2.7.3 Unsuccessful Operation.....	25
8.2.7.4 Abnormal Conditions .....	25
8.2.8 Common Measurement Initiation.....	25
8.2.8.1 General .....	25
8.2.8.2 Successful Operation .....	25

8.2.8.3	Unsuccessful Operation .....	26
8.2.8.4	Abnormal Conditions .....	27
8.2.9	Common Measurement Report .....	27
8.2.9.1	General .....	27
8.2.9.2	Successful Operation .....	27
8.2.9.3	Abnormal Conditions .....	27
8.2.10	Common Measurement Termination.....	27
8.2.10.1	General .....	27
8.2.10.2	Successful Operation .....	28
8.2.10.3	Abnormal Conditions .....	28
8.2.11	Common Measurement Failure .....	28
8.2.11.1	General .....	28
8.2.11.2	Successful Operation .....	28
8.2.11.3	Abnormal Conditions .....	28
8.2.12	Cell Setup .....	28
8.2.12.1	General .....	28
8.2.12.2	Successful operation .....	29
8.2.12.3	Unsuccessful operation.....	29
8.2.12.4	Abnormal Conditions .....	30
8.2.13	Cell Reconfiguration .....	30
8.2.13.1	General .....	30
8.2.13.2	Successful operation .....	30
8.2.13.3	Unsuccessful operation.....	31
8.2.13.4	Abnormal Conditions .....	31
8.2.14	Cell Deletion .....	31
8.2.14.1	General .....	31
8.2.14.2	Successful operation .....	31
8.2.14.3	Unsuccessful operation.....	32
8.2.14.4	Abnormal Conditions .....	32
8.2.15	Resource Status Indication .....	32
8.2.15.1	General .....	32
8.2.15.2	Successful Operation .....	32
8.2.15.3	Abnormal Conditions .....	33
8.2.16	System Information Update .....	33
8.2.16.1	General .....	33
8.2.16.2	Successful Operation .....	33
8.2.16.3	Unsuccessful Operation.....	34
8.2.16.4	Abnormal Conditions .....	34
8.2.17	Radio Link Setup.....	34
8.2.17.1	General .....	34
8.2.17.2	Successful operation .....	35
8.2.17.3	Unsuccessful Operation.....	36
8.2.17.4	Abnormal Conditions .....	36
8.3	NBAP Dedicated Procedures.....	37
8.3.1	Radio Link Addition.....	37
8.3.1.1	General .....	37
8.3.1.2	Successful operation.....	37
8.3.1.3	Unsuccessful operation.....	38
8.3.1.4	Abnormal conditions .....	39
8.3.2	Synchronised Radio Link Reconfiguration Preparation.....	39
8.3.2.1	General .....	39
8.3.2.2	Successful Operation .....	39
8.3.2.3	Unsuccessful Operation .....	41
8.3.2.4	Abnormal Conditions .....	42
8.3.3	Synchronised Radio Link Reconfiguration Commit .....	42
8.3.3.1	General .....	42
8.3.5.2	Successful Operation .....	42
8.3.5.3	Abnormal Conditions .....	42
8.3.4	Synchronised Radio Link Reconfiguration Cancellation .....	42
8.3.4.1	General .....	42
8.3.4.2	Successful Operation .....	42
8.3.4.3	Abnormal Conditions .....	43

8.3.5	Unsynchronised Radio Link Reconfiguration .....	43
8.3.5.1	General .....	43
8.3.5.2	Successful Operation .....	43
8.3.5.1	Unsuccessful Operation .....	45
8.3.5.2	Abnormal Conditions .....	45
8.3.6	Radio Link Deletion .....	46
8.3.6.1	General .....	46
8.3.6.2	Successful Operation .....	46
8.3.6.3	Unsuccessful Operation .....	46
8.3.6.4	Abnormal Conditions .....	46
8.3.7	DL Power Control (for FDD only) .....	46
8.3.7.1	General .....	46
8.3.7.2	Successful Operation .....	46
8.3.7.3	Abnormal Conditions .....	47
8.3.8	Dedicated Measurement Initiation .....	47
8.3.8.1	General .....	47
8.3.8.2	Successful Operation .....	47
8.3.8.3	Unsuccessful Operation .....	48
8.3.8.4	Abnormal Conditions .....	49
8.3.9	Dedicated Measurement Reporting .....	49
8.3.9.1	General .....	49
8.3.9.2	Successful Operation .....	49
8.3.9.3	Abnormal Conditions .....	49
8.3.10	Dedicated Measurement Termination .....	49
8.3.10.1	General .....	49
8.3.10.2	Successful Operation .....	50
8.3.10.3	Abnormal Conditions .....	50
8.3.11	Dedicated Measurement Failure .....	50
8.3.11.1	General .....	50
8.3.11.2	Successful Operation .....	50
8.3.11.3	Abnormal Conditions .....	50
8.3.12	Radio Link Failure .....	50
8.3.12.1	General .....	50
8.3.12.2	Successful Operation .....	51
8.3.13	Radio Link Restoration .....	51
8.3.13.1	General .....	51
8.3.13.2	Successful Operation .....	51
8.3.14	Compressed Mode Preparation (for FDD only) .....	51
8.3.14.1	General .....	51
8.3.14.2	Successful Operation .....	52
8.3.14.3	Unsuccessful Operation .....	52
8.3.14.4	Abnormal Conditions .....	52
8.3.15	Compressed Mode Commit (for FDD only) .....	52
8.3.15.1	General .....	52
8.3.15.2	Successful Operation .....	53
8.3.15.3	Abnormal Conditions .....	53
8.3.16	Compressed Mode Cancellation (for FDD only) .....	53
8.3.16.1	General .....	53
8.3.16.2	Successful Operation .....	53
8.3.16.3	Abnormal Conditions .....	53
8.4	Error Handling Procedures .....	53
8.4.1	Error Indication .....	53
9	Elements for NBAP communication .....	54
9.1	Message functional definition and content .....	54
9.1.1	Message Contents .....	54
9.1.2	COMMON TRANSPORT CHANNEL SETUP REQUEST .....	55
9.1.2.1	FDD Message .....	55
9.1.2.2	TDD Message .....	56
9.1.3	COMMON TRANSPORT CHANNEL SETUP RESPONSE .....	58
9.1.4	COMMON TRANSPORT CHANNEL SETUP FAILURE .....	59
9.1.5	COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST .....	60

9.1.5.1	FDD Message .....	60
9.1.5.2	TDD Message .....	60
9.1.6	COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE.....	61
9.1.7	COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE.....	62
9.1.8	COMMON TRANSPORT CHANNEL DELETION REQUEST.....	62
9.1.9	COMMON TRANSPORT CHANNEL DELETION RESPONSE.....	62
9.1.10	BLOCK RESOURCE REQUEST .....	62
9.1.11	BLOCK RESOURCE RESPONSE.....	63
9.1.12	BLOCK RESOURCE FAILURE.....	63
9.1.13	UNBLOCK RESOURCE INDICATION .....	63
9.1.14	AUDIT REQUIRED INDICATION.....	63
9.1.15	AUDIT REQUEST .....	63
9.1.16	AUDIT RESPONSE .....	64
9.1.17	COMMON MEASUREMENT INITIATION REQUEST.....	66
9.1.18	COMMON MEASUREMENT INITIATION RESPONSE.....	67
9.1.19	COMMON MEASUREMENT INITIATION FAILURE.....	67
9.1.20	COMMON MEASUREMENT REPORT .....	67
9.1.21	COMMON MEASUREMENT TERMINATION REQUEST.....	67
9.1.22	COMMON MEASUREMENT FAILURE INDICATION .....	68
9.1.23	CELL SETUP REQUEST.....	68
9.1.23.1	FDD Message .....	68
9.1.23.2	TDD Message.....	69
9.1.24	CELL SETUP RESPONSE.....	69
9.1.25	CELL SETUP FAILURE.....	70
9.1.26	CELL RECONFIGURATION REQUEST .....	70
9.1.26.1	FDD Message .....	70
9.1.26.2	TDD Message.....	70
9.1.27	CELL RECONFIGURATION RESPONSE .....	71
9.1.28	CELL RECONFIGURATION FAILURE .....	71
9.1.29	CELL DELETION REQUEST .....	71
9.1.30	CELL DELETION RESPONSE .....	71
9.1.31	RESOURCE STATUS INDICATION .....	72
9.1.32	SYSTEM INFORMATION UPDATE REQUEST.....	75
9.1.33	SYSTEM INFORMATION UPDATE RESPONSE.....	75
9.1.34	SYSTEM INFORMATION UPDATE FAILURE.....	76
9.1.35	RADIO LINK SETUP REQUEST .....	77
9.1.35.1	FDD message.....	77
9.1.35.2	TDD message .....	79
9.1.36	RADIO LINK SETUP RESPONSE.....	81
9.1.36.1	FDD message.....	81
9.1.36.2	TDD Message .....	82
9.1.37	RADIO LINK SETUP FAILURE.....	83
9.1.37.1	FDD Message .....	83
9.1.37.2	TDD Message.....	84
9.1.38	RADIO LINK ADDITION REQUEST .....	84
9.1.38.1	FDD Message .....	84
9.1.38.2	TDD Message .....	85
9.1.39	RADIO LINK ADDITION RESPONSE .....	86
9.1.39.1	FDD message.....	86
9.1.39.2	TDD Message .....	87
9.1.40	RADIO LINK ADDITION FAILURE .....	88
9.1.40.1	FDD Message .....	88
9.1.40.2	TDD Message .....	88
9.1.41	RADIO LINK RECONFIGURATION PREPARE .....	89
9.1.41.1	FDD Message .....	89
9.1.41.2	TDD Message .....	91
9.1.42	RADIO LINK RECONFIGURATION READY .....	94
9.1.43	RADIO LINK RECONFIGURATION FAILURE .....	95
9.1.44	RADIO LINK RECONFIGURATION COMMIT .....	95
9.1.45	RADIO LINK RECONFIGURATION CANCEL.....	95
9.1.46	RADIO LINK RECONFIGURATION REQUEST .....	96
9.1.46.1	FDD Message .....	96

9.1.46.2	TDD Message .....	98
9.1.48	RADIO LINK RECONFIGURATION RESPONSE .....	99
9.1.48	RADIO LINK DELETION REQUEST .....	101
9.1.49	RADIO LINK DELETION RESPONSE .....	101
9.1.50	DL POWER CONTROL REQUEST (FDD only) .....	101
9.1.51	DEDICATED MEASUREMENT INITIATION REQUEST .....	102
9.1.52	DEDICATED MEASUREMENT INITIATION RESPONSE .....	102
9.1.53	DEDICATED MEASUREMENT INITIATION FAILURE .....	103
9.1.54	DEDICATED MEASUREMENT REPORT .....	103
9.1.55	DEDICATED MEASUREMENT TERMINATION REQUEST .....	104
9.1.56	DEDICATED MEASUREMENT FAILURE INDICATION .....	104
9.1.57	RADIO LINK FAILURE INDICATION .....	104
9.1.58	RADIO LINK RESTORE INDICATION .....	104
9.1.59	COMPRESSED MODE PREPARE (FDD only) .....	105
9.1.60	COMPRESSED MODE READY (FDD only) .....	106
9.1.61	COMPRESSED MODE COMMIT (FDD only) .....	106
9.1.62	COMPRESSED MODE FAILURE (FDD only) .....	106
9.1.63	COMPRESSED MODE CANCEL (FDD only) .....	107
9.1.64	ERROR INDICATION .....	107
9.2	Information Element Functional Definition and Contents .....	107
9.2.1	Common parameters .....	107
9.2.1.1	Add/Delete Indicator .....	107
9.2.1.2	Availability Status .....	107
9.2.1.3	BCCH Modification Time .....	108
9.2.1.4	Binding ID .....	108
9.2.1.5	Blocking Priority Indicator .....	108
9.2.1.6	Cause .....	109
9.2.1.7	CFN .....	110
9.2.1.8	C-ID .....	110
9.2.1.9	Common Measurement Object Type .....	110
9.2.1.10	Common Measurement Type .....	110
9.2.1.11	Common Measurement Value .....	110
9.2.1.12	Common Physical Channel Id .....	111
9.2.1.13	Common Transport Channel Id .....	111
9.2.1.14	Communication Control Port ID .....	111
9.2.1.15	Configuration Generation ID .....	111
9.2.1.16	Criticality diagnostics .....	112
9.2.1.17	CRNC Communication Context ID .....	112
9.2.1.18	DCH Combination Indicator .....	112
9.2.1.19	DCH ID .....	113
9.2.1.20	DL Power .....	113
9.2.1.21	Dedicated Measurement Object Type .....	113
9.2.1.22	Dedicated Measurement Type .....	113
9.2.1.23	Dedicated Measurement Value .....	113
9.2.1.24	DSCH ID .....	114
9.2.1.25	DSCH Transport Format Set .....	114
9.2.1.26	DSCH Transport Format Combination Set .....	114
9.2.1.27	Frame Handling Priority .....	114
9.2.1.28	Frame Offset .....	114
9.2.1.29	IB_SG .....	115
9.2.1.30	IB_SG_POS .....	115
9.2.1.31	IB_SG REP .....	115
9.2.1.32	IB Type .....	115
9.2.1.33	Indication Type .....	115
9.2.1.34	Local Cell ID .....	116
9.2.1.35	Maximum DL Power Capability .....	116
9.2.1.36	Max Transmission Power .....	116
9.2.1.37	Measurement ID .....	116
9.2.1.38	Measurement Characteristics .....	116
9.2.1.39	Report Characteristics .....	117
9.2.1.40	Message discriminator .....	119
9.2.1.41	Message Type .....	119

9.2.1.42	Minimum Spreading Factor .....	121
9.2.1.43	Node B Communication Context ID .....	121
9.2.1.44	Payload CRC presence .....	121
9.2.1.45	Puncture limit .....	121
9.2.1.46	Resource Operational State .....	121
9.2.1.47	RLC Mode .....	122
9.2.1.48	RL ID .....	122
9.2.1.49	Segment Type .....	122
9.2.1.50	SIB Deletion Indicator .....	122
9.2.1.51	SIB Originator .....	122
9.2.1.52	Shutdown Timer .....	123
9.2.1.53	TFCI Presence .....	123
9.2.1.54	TFCS (Transport Format Combination Set) .....	123
9.2.1.55	TFS (Transport Format Set) .....	123
9.2.1.56	ToAWE .....	124
9.2.1.57	ToAWS .....	125
9.2.1.58	Transaction ID .....	125
9.2.1.59	Transport Layer Address .....	125
9.2.1.60	UARFCN .....	125
9.2.1.61	UL FP mode .....	125
9.2.1.62	UL interference level .....	126
9.2.2	FDD specific parameters .....	126
9.2.2.1	AICH Transmission Timing .....	126
9.2.2.2	Chip Offset .....	126
9.2.2.3	Compressed mode method .....	126
9.2.2.4	D-Field Length .....	126
9.2.2.5	Diversity Control Field .....	127
9.2.2.6	Diversity Indication .....	127
9.2.2.7	Diversity mode .....	127
9.2.2.8	DL DPCCH Slot Format .....	127
9.2.2.9	DL frame type .....	127
9.2.2.10	DL Scrambling Code .....	128
9.2.2.11	Multiplexing Position .....	128
9.2.2.12	FDD DL Channelisation Code Number .....	128
9.2.2.13	FDD S-CCPCH Offset .....	128
9.2.2.14	Gap Period .....	128
9.2.2.15	Gap Position Mode .....	128
9.2.2.16	Maximum Number of UL DPDCHs .....	129
9.2.2.17	Minimum UL Channelisation Code Length .....	129
9.2.2.18	Pattern Duration (PD) .....	129
9.2.2.19	PICH Mode .....	129
9.2.2.20	Pilot Bits Used Indicator .....	129
9.2.2.21	Power Control Mode .....	130
9.2.2.22	Power Offset .....	130
9.2.2.23	Power Resume Mode .....	130
9.2.2.24	Preamble Signature .....	130
9.2.2.25	Primary Scrambling code .....	130
9.2.2.26	Primary CPICH Power .....	130
9.2.2.27	Propagation Delay .....	131
9.2.2.28	RACH Slot Format .....	131
9.2.2.29	RACH sub Channel numbers .....	131
9.2.2.30	Scrambling code change .....	131
9.2.2.31	Scrambling Code Word Number .....	131
9.2.2.32	Secondary CCPCH Slot Format .....	131
9.2.2.33	S-Field Length .....	131
9.2.2.34	SSDT Cell Identity .....	132
9.2.2.35	SSDT Cell ID Length .....	132
9.2.2.36	SSDT Support Indicator .....	132
9.2.2.37	SSDT Indication .....	132
9.2.2.38	STTD Indicator .....	132
9.2.2.39	T_Cell .....	133
9.2.2.40	TFCI signalling mode .....	133

9.2.2.41	TGD .....	133
9.2.2.42	TGL .....	133
9.2.2.43	TPC DL step size .....	133
9.2.2.44	Transmit Diversity Indicator .....	134
9.2.2.45	TSTD Indicator .....	134
9.2.2.46	UL/DL compressed mode selection: .....	134
9.2.2.47	UL delta Eb/No .....	134
9.2.2.48	UL delta Eb/No after .....	134
9.2.2.49	UL DPCCCH Slot Format .....	135
9.2.2.50	UL Eb/No .....	135
9.2.2.51	UL Scrambling Code .....	135
9.2.3	TDD specific Parameters .....	135
9.2.3.1	Burst Type .....	135
9.2.3.2	CCTrCH ID .....	135
9.2.3.3	Cell Parameter ID .....	135
9.2.3.4	DPCCH ID .....	136
9.2.3.5	Max PRACH Midamble shift .....	136
9.2.3.6	Midamble shift .....	136
9.2.3.7	Paging Indicator Length .....	136
9.2.3.8	PCCPCH Power .....	136
9.2.3.9	PRACH Midamble .....	136
9.2.3.10	PSCH Time Slot .....	137
9.2.3.11	PSCH Power .....	137
9.2.3.12	Repetition Length .....	137
9.2.3.13	Repetition Period .....	137
9.2.3.14	Sync case .....	137
9.2.3.15	Synchronisation method .....	138
9.2.3.16	TDD Channelisation Code .....	138
9.2.3.17	TDD Chip Offset .....	138
9.2.3.18	TDD Physical Channel Offset .....	138
9.2.3.19	TDD S-CCPCH Offset .....	138
9.2.3.20	TFCI Coding .....	139
9.2.3.21	Time Slot .....	139
9.2.3.22	Time Slot Direction .....	139
9.2.3.23	Time Slot Status .....	139
9.2.3.24	Transmission Diversity Applied .....	139
9.2.3.25	USCH ID .....	139
9.3	Message and Information element abstract syntax (with ASN.1) .....	141
9.3.1	Usage of protocol extension mechanism for non-standard use .....	141
9.3.2	PDU Description for NBAP .....	141
9.3.3	NBAP PDU Content Definitions .....	156
9.3.4	NBAP Information Elements .....	258
9.3.5	NBAP Common Data Type Definitions .....	277
9.3.6	NBAP Extension Definitions .....	278
9.3.7	Constant Definitions for NBAP .....	281
9.4	Message transfer syntax .....	289
9.5	Timers .....	289
10	Handling of unknown, unforeseen and erroneous protocol data .....	289
10.1	General .....	289
10.2	Transfer Syntax Error .....	289
10.3	Abstract Syntax Error .....	289
10.3.1	General .....	289
10.3.2	Handling of the Criticality Information at Reception .....	289
10.3.2.1	Procedure Code .....	289
10.3.2.2	IEs other than the Procedure Code .....	290
10.4	Logical Error Handling .....	290
<b>Annex A (informative): Change history .....</b>		<b>292</b>
History .....		293

---

## Foreword

This Technical Specification has been produced by the 3GPP.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of this TS, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 Indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

## 1 Scope

The present document specifies the standards for NBAP specification to be used over Iub Interface.

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

- [1] 3G TS 25.401: "UTRAN Overall Description".
- [2] 3G TS 25.426: "UTRAN I<sub>ur</sub> and I<sub>ub</sub> Interface Data Transport & Transport Signalling for DCH Data Streams".
- [3] CCITT Recommendation X.731 (01/92): "Information Technology – Open Systems Interconnection – Systems Management: State Management function".
- [4] 3G TS 25.215: "Physical layer – Measurements (FDD)".
- [5] 3G TS 25.225: "Physical layer – Measurements (TDD)".
- [6] 3G TS 25.430: "UTRAN Iub General Aspect and Principle".
- [7] 3G TS 25.211: "Physical channels and mapping of transport channels onto physical channels (FDD)".
- [8] 3G TS 25.212: "Multiplexing and channel coding (FDD)".
- [9] 3G TS 25.213: "Spreading and modulation (FDD)".
- [10] 3G TS 25.214: "Physical layer procedures (FDD)".
- [11] X.691, (12/94) "Information technology - ASN.1 encoding rules - Specification of Packed Encoding Rules (PER)".
- [12] X.680, (12/94) "Information Technology - Abstract Syntax Notation One (ASN.1):Specification of basic notation".
- [13] X.681, (12/94) Information Technology - Abstract Syntax Notation One (ASN.1): Information object specification

---

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the following terms and definitions apply.

**Elementary Procedure:** The NBAP protocol consists of Elementary Procedures (EPs). An Elementary Procedure is a unit of interaction between the CRNC and the Node B.

An EP consists of an initiating message and possibly a response message.

Two kinds of EPs are used:

- **Class 1:** Elementary Procedures with response (success or failure).
- **Class 2:** Elementary Procedures without response.

For **Class 1** EPs, the types of responses can be as follows:

Successful

- A signalling message explicitly indicates that the elementary procedure successfully completed with the receipt of the response.

Unsuccessful

- A signalling message explicitly indicates that the EP failed.
- On time supervision expiry (i.e. absence of expected response). Whether or not any Class 1 procedure will have a timer on NBAP is FFS. To be sorted out when discussing the details of the error cases.

**Class 2** EPs are considered always successful.

## 3.2 Symbols

No special symbols are defined in this document.

## 3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ASN.1	Abstract Syntax Notation One
ATM	Asynchronous Transfer Mode
BCCCH	Broadcast Control Channel
CCPCH	Common Control Physical Channel
CFN	Connection Frame Number
CRNC	Controlling Radio Network Controller
DCH	Dedicated Channel
DL	Downlink
DPCCH	Dedicated Physical Control Channel
DPCH	Dedicated Physical Channel
DPDCH	Dedicated Physical Data Channel
DRNC	Drift Radio Network Controller
FDD	Frequency Division Duplex
FP	Frame Protocol
L1	Layer 1
L2	Layer 2
NBAP	Node B Application Part
O&M	Operation and Management
QoS	Quality of Service
RL	Radio Link
RNC	Radio Network Controller
RRC	Radio Resource Control
SRNC	Serving Radio Network Controller
TDD	Time Division Duplex
TFC	Transport Format Combination
TFCI	Transport Format Combination Indicator
TFCS	Transport Format Combination Set
TFS	Transport Format Set
UE	User Equipment
UL	Uplink
UTRAN	UMTS Terrestrial Radio Access Network

---

## 4 General

### 4.1 Procedure Specification Principles

Node B Application Part, NBAP, includes common procedures and dedicated procedures. It covers procedures for paging distribution, broadcast system information, request / complete / release of dedicated resources and management of logical resources (logical O&M [1]).

The principle for specifying the procedure logic is to specify the functional behaviour of the Node B exactly and completely. The CRNC functional behaviour is left unspecified.

### 4.2 Forwards and Backwards Compatibility

The forwards and backwards compatibility of the protocol is assured by a mechanism where all current and future messages, and IEs or groups of related IEs, include Id and criticality fields that are coded in a standard format that will not be changed in the future. These parts can always be decoded regardless of the standard version.

---

## 5 NBAP Services

The NBAP offers the following services:

1. Parallel Transactions: Unless explicitly indicated in the procedure description, at any instance in time one protocol peer shall have initiated maximum one ongoing dedicated NBAP procedure related to a certain NodeB communication context.

---

## 6 Services Expected from Signalling Transport

Contents are missing.

---

## 7 Functions of NBAP

The NBAP protocol has the following functions:

- Cell Configuration Management. This function gives the CRNC the possibility to manage the cell configuration information in a Node B.
- Common Transport Channel Management. This function gives the CRNC the possibility to manage the configuration of Common Transport Channels in a Node B.
- System Information Management. This function gives the CRNC the ability to manage the scheduling of System Information to be broadcast in a cell.
- Resource Event Management. This function gives the Node B the ability to inform the CRNC about the status of Node B resources.
- Configuration Alignment. This function gives the CRNC and the Node B the possibility to verify that both nodes has the same information on the configuration of the radio resources.
- Measurements on Common Resources. This function allows the CRNC to initiate measurements in the Node B. The function also allows the Node B to report the result of the measurements.
- Synchronisation Management.(TDD) This function allows the CRNC to manage the synchronisation of a TDD cell in a Node B.

- Radio Link Management. This function allows the CRNC to manage radio links using dedicated resources in a NodeB.
- Radio Link Supervision. This function allows the CRNC to report failures and restorations of a Radio Link.
- Measurements on Dedicated Resources. This function allows the CRNC to initiate measurements in the NodeB. The function also allows the NodeB to report the result of the measurements.
- DL Power Drifting Correction (FDD). This function allows the CRNC to adjust the DL power level of one or more Radio Links in order to avoid DL power drifting between the Radio Links.
- Reporting general error situations. This function allows reporting of general error situations, for which function specific error messages have not been defined.

These functions are implemented by one or several NBAP elementary procedures described in the following section.

---

## 8 NBAP Procedures

### 8.1 Elementary Procedures

NBAP procedures are divided into common procedures and dedicated procedures.

- NBAP common procedures are procedures that request initiation of a UE context for a specific UE in Node B or are not related to a specific UE. NBAP common procedures also incorporate logical O&M [1] procedures.
- NBAP dedicated procedures are procedures that are related to a specific UE context in Node B. This UE context is identified by a UE context identity.

The two types of procedures may be carried on separate signalling links.

In the following tables, all EPs are divided into Class 1 and Class 2 EPs:

Table 1: Class 1

Elementary Procedure	Message	Successful Outcome	Unsuccessful Outcome	
		Response message	Response message	Timer
Cell Setup	CELL SETUP REQUEST	CELL SETUP RESPONSE	CELL SETUP FAILURE	
Cell Reconfiguration	CELL RECONFIGURATION REQUEST	CELL RECONFIGURATION RESPONSE	CELL RECONFIGURATION FAILURE	
Cell Delete	CELL DELETE REQUEST	CELL DELETE RESPONSE		
Common Transport Channel Setup	COMMON TRANSPORT CHANNEL SETUP REQUEST	COMMON TRANSPORT CHANNEL SETUP RESPONSE	COMMON TRANSPORT CHANNEL SETUP FAILURE	
Common Transport Channel Reconfigure	COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST	COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE	COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE	
Common Transport Channel Delete	COMMON TRANSPORT CHANNEL DELETION REQUEST	COMMON TRANSPORT CHANNEL DELETION RESPONSE		
Audit	AUDIT REQUEST	AUDIT RESPONSE		
Block Resource	BLOCK RESOURCE REQUEST	BLOCK RESOURCE RESPONSE	BLOCK RESOURCE FAILURE	
Radio Link Setup	RADIO LINK SETUP REQUEST	RADIO LINK SETUP RESPONSE	RADIO LINK SETUP FAILURE	
System Information Update	SYSTEM INFORMATION UPDATE REQUEST	SYSTEM INFORMATION UPDATE RESPONSE	SYSTEM INFORMATION UPDATE FAILURE	
Common Measurement Initiation	COMMON MEASUREMENT INITIATION REQUEST	COMMON MEASUREMENT INITIATION RESPONSE	COMMON MEASUREMENT INITIATION FAILURE	
Radio Link Addition	RADIO LINK ADDITION REQUEST	RADIO LINK ADDITION RESPONSE	RADIO LINK ADDITION FAILURE	
Radio Link Deletion	RADIO LINK DELETION REQUEST	RADIO LINK DELETION RESPONSE		
Synchronised Radio Link Reconfiguration Preparation	RADIO LINK RECONFIGURATION PREPARE	RADIO LINK RECONFIGURATION READY	RADIO LINK RECONFIGURATION FAILURE	
Unsynchronised Radio Link Reconfiguration	RADIO LINK RECONFIGURATION REQUEST	RADIO LINK RECONFIGURATION RESPONSE	RADIO LINK RECONFIGURATION FAILURE	
Dedicated Measurement Initiation	DEDICATED MEASUREMENT INITIATION REQUEST	DEDICATED MEASUREMENT INITIATION RESPONSE	DEDICATED MEASUREMENT INITIATION FAILURE	
Synchronised Compressed Mode Control Preparation	COMPRESSED MODE PREPARE	COMPRESSED MODE READY	COMPRESSED MODE FAILURE	

**Table 2: Class 2**

<b>Elementary Procedure</b>	<b>Message</b>
Resource Status Indication	RESOURCE STATUS INDICATION
Audit Required	AUDIT REQUIRED INDICATION
Common Measurement Report	COMMON MEASUREMENT REPORT
Common Measurement Termination	COMMON MEASUREMENT TERMINATION REQUEST
Common Measurement Failure	COMMON MEASUREMENT FAILURE INDICATION
Synchronised Radio Link Reconfiguration Commit	RADIO LINK RECONFIGURATION COMMIT
Synchronised Radio Link Reconfiguration Cancellation	RADIO LINK RECONFIGURATION CANCELLATION
Radio Link Failure	RADIO LINK FAILURE INDICATION
Radio Link Restoration	RADIO LINK RESTORE INDICATION
Dedicated Measurement Report	DEDICATED MEASUREMENT REPORT
Dedicated Measurement Termination	DEDICATED MEASUREMENT TERMINATION REQUEST
Dedicated Measurement Failure	DEDICATED MEASUREMENT FAILURE INDICATION
Downlink Power Control [FDD]	DL POWER CONTROL REQUEST
Compressed Mode Control Commit	COMPRESSED MODE COMMIT
Compressed Mode Control Cancellation	COMPRESSED MODE CANCEL
Unblock Resource	UNBLOCK RESOURCE INDICATION
Error Indication	ERROR INDICATION


## 8.2 NBAP Common Procedures

### 8.2.1 Common Transport Channel Setup

#### 8.2.1.1 General

This procedure is used for establishing the necessary resources in Node B, regarding Secondary CCPCH, PICH, PRACH, AICH(FDD), FACH, PCH, and RACH.

#### 8.2.1.2 Successful Operation

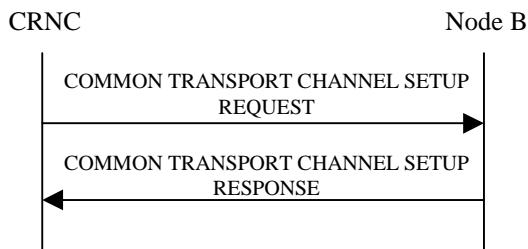**Figure 1: Common Transport Channel Setup procedure, successful case**

The procedure is initiated with a COMMON TRANSPORT CHANNEL SETUP REQUEST message sent from the CRNC to the Node B.

One message can configure only one of the following combinations:

- [FDD-one Secondary CCPCH, and FACHes, PCH and PICH related to that Secondary CCPCH], or

- [TDD- Secondary CCPCHes and FACHes, PCHes with the corresponding PICH related to that group of Secondary CCPCHes], or
- one PRACH, and one RACH and one AICH(FDD) related to that PRACH at the time.

**[FDD - Secondary CCPCH]:** When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains a Secondary CCPCH, Node B shall configure and activate it according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.  
 [FDD- The handling of the optional STTD IE is FFS.]

**[TDD - Secondary CCPCHes]:** When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains a Secondary CCPCHes, Node B shall configure and activate it according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

[TDD- FACHs and PCHs may be mapped onto a CCTrCH which may consist of several Secondary CCPCHes]

If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains one or several FACHes, Node B shall configure and activate them according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.


If the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains a PCH and a PICH, Node B shall configure and activate them according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.  
 [FDD- The handling of the optional STTD IE for PICH is FFS.]

**PRACH:** When the COMMON TRANSPORT CHANNEL SETUP REQUEST message contains a PRACH, Node B shall configure and activate it according to the COMMON TRANSPORT CHANNEL SETUP REQUEST message.

FDD- The handling of the optional STTD IE for AICH (FDD) is FFS.]

After a successful procedure, the defined common transport channels and the common physical channels have adopted the operational state Enabled in Node B and the common transport channels exist on the Uu interface. Node B shall store the new value of *Configuration Generation ID* IE and it shall respond with the COMMON TRANSPORT CHANNEL SETUP RESPONSE message with the transport layer information for the configured common transport channels.

### 8.2.1.3 Unsuccessful Operation

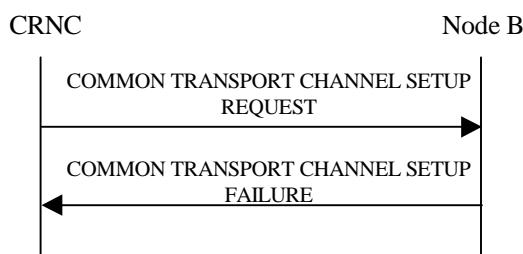

**Figure 2: Common Transport Channel Setup procedure, unsuccessful case**

If the Node B is not able to support all part of the configuration, it shall reject the configuration of all the channels in the COMMON TRANSPORT CHANNEL SETUP REQUEST message. The *Cause Value* IE shall be set to an appropriate value. The new value of *Configuration Generation ID* IE from the COMMON TRANSPORT CHANNEL SETUP REQUEST message shall not be stored.

If the configuration was unsuccessful, the Node B shall respond with a COMMON TRANSPORT CHANNEL SETUP FAILURE message.

Typical cause values are as follows:

### Radio Network Layer Cause

- Cell not available
- Power level not supported
- NodeB Resources unavailable

### Transport Layer Cause

- Transport Resources Unavailable

### Protocol Cause

- Semantic error

### Miscellaneous Cause

- O&M Intervention
- Unspecified Failure
- Control processing overload
- HW failure

## 8.2.1.4 Abnormal Conditions


If the C-ID in the COMMON TRANSPORT CHANNEL SETUP REQUEST message is not existing in the Node B, it shall respond with the COMMON TRANSPORT CHANNEL SETUP FAILURE message with the Cause IE = 'unknown C-ID'.

## 8.2.2 Common Transport Channel Reconfigure

### 8.2.2.1 General

This procedure is used for reconfiguring common transport channels and/or common physical channels, while they still might be in operation.

### 8.2.2.2 Successful Operation

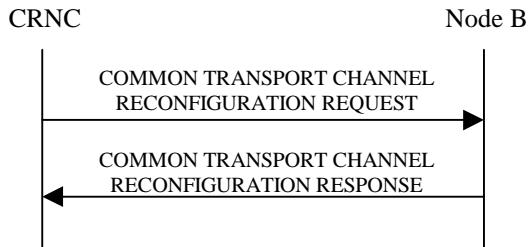

**Figure 3: Common Transport Channel Reconfiguration, successful case**

The procedure is initiated with a COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message sent from the CRNC to the Node B.

**[TDD S-CCPCH]:** If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the S-CCPCH Power IE, the Node B shall reconfigure the power that the indicated S-CCPCH shall use.

**FACH:** When one or several FACHes are present Node B reconfigures the indicated FACHes.

[FDD] If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *Max FACH Power* IE, the Node B shall reconfigure the maximum power that the FACH may use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *ToAWS* IE, the Node B shall reconfigure the time of arrival window startpoint that the FACH shall use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *ToAWE* IE, the Node B shall reconfigure the time of arrival window endpoint that the FACH shall use.

**PCH:** When one PCH [TDD or several PCHs] is present Node B reconfigures the indicated PCH[ TDD PCHs].

[FDD] If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *PCH Power* IE, the Node B shall reconfigure the power that the PCH shall use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *ToAWS* IE, the Node B shall reconfigure the time of arrival window startpoint that the PCH shall use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *ToAWE* IE, the Node B shall reconfigure the time of arrival window endpoint that the PCH shall use.

**PICH:** When a PICH is present Node B reconfigures the indicated PICH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *PICH Power* IE, the Node B shall reconfigure the power that the PICH shall use.

**[FDD- PRACH]:** When a PRACH is present Node B reconfigures the indicated PRACH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the Allowed Preamble Signatures Information, the Node B shall reconfigure the preamble signatures that the PRACH shall use.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the Allowed Slot Format Information, the Node B shall reconfigure the slot formats that the PRACH shall use.


If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the Allowed Sub Channel Information, the Node B shall reconfigure the sub channel numbers that the PRACH shall use.

**[FDD- AICH]:** When a AICH is present Node B reconfigures the indicated AICH.

If the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message includes the *AICH Power* IE, the Node B shall reconfigure the power that the AICH shall use.

After a successful procedure, the channels have adopted the new configuration in Node B. Node B shall store the new value of *Configuration Generation ID* IE, and the Node B shall respond with the COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE message.

### 8.2.2.3 Unsuccessful Operation

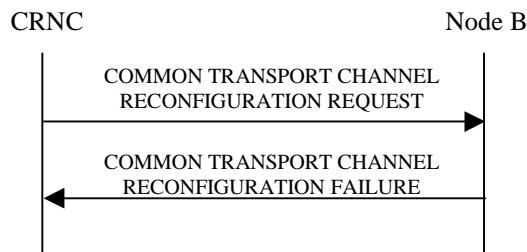

**Figure 4: Common Transport Channel Reconfiguration procedure, unsuccessful case**

If the Node B is not able to support all parts of the configuration, it shall reject the configuration of all the channels in the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message. The *Cause Value* IE shall be set to an appropriate value. The new value of *Configuration Generation ID* IE from the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message shall not be stored.

If the configuration was unsuccessful, the Node B shall respond with the COMMON TRANSPORT CHANNEL SETUP FAILURE message, the Node B shall respond with the COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE message.

Typical cause values are as follows:

#### Radio Network Layer Cause

- Cell not available
- Power level not supported
- NodeB Resources unavailable

#### Transport Layer Cause

- Transport Resources Unavailable

#### Protocol Cause

- Semantic error

#### Miscellaneous Cause

- O&M Intervention
- Unspecified Failure
- Control processing overload
- HW failure

### 8.2.2.4 Abnormal Conditions


If the C-ID in the COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST message is not existing in the Node B, it shall respond with the COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE message with the *Cause* IE = 'unknown C-ID'.

## 8.2.3 Common Transport Channel Delete

### 8.2.3.1 General

This procedure is used for deleting common physical channels and common transport channels setup by the Common Transport Channel Setup procedure in a cell.

### 8.2.3.2 Successful Operation

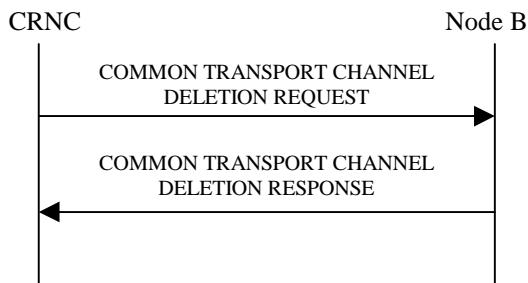

**Figure 5: Common Transport Channel Deletion procedure, successful case**

The procedure is initiated with a COMMON TRANSPORT CHANNEL DELETION REQUEST message sent from the CRNC to the Node B.

**Secondary CCPCH:** When the COMMON TRANSPORT CHANNEL DELETION REQUEST message contains a Secondary CCPCH, Node B shall delete the indicated channel and the FACHes and PCH supported by that Secondary CCPCH. If there is a PCH that is deleted, the PICH associated with that PCH shall also be deleted.

**PRACH:** When the COMMON TRANSPORT CHANNEL DELETION REQUEST message contains a PRACH, Node B shall delete the indicated channel and the RACH supported by the PRACH. [FDD- The AICH associated with the PCH shall also be deleted.]

[TDD- If the requested common physical channel is a part of a CCTrCH, all common transport channels and all common physical channels associated with this CCTrCH shall be deleted.]

After a successful procedure, the channels are deleted in Node B. Node B shall store the new value of the *Configuration Generation ID* IE, and respond with the COMMON TRANSPORT CHANNEL DELETION RESPONSE message.

### 8.2.3.3 Unsuccessful Operation

### 8.2.3.4 Abnormal Conditions


If the C-ID in the COMMON TRANSPORT CHANNEL DELETION REQUEST message is not existing in the Node B, the Node B shall respond with the COMMON TRANSPORT CHANNEL DELETION RESPONSE message.

## 8.2.4 Block Resource

### 8.2.4.1 General

The Node B initiates this procedure to request the CRNC to prohibit the usage of the specified logical resources.

### 8.2.4.2 Successful Operation

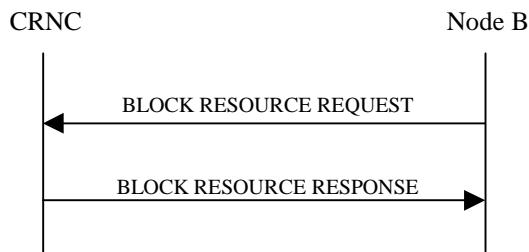

**Figure 6: Block Resource procedure, Successful case**

The procedure is initiated with a BLOCK RESOURCE REQUEST message sent from the Node B to the CRNC.

Upon reception of the BLOCK RESOURCE REQUEST message, the CRNC shall prohibit the use of the indicated logical resources according to the *Blocking Priority Indicator* IE.

If the *Blocking Priority Indicator* IE in the BLOCK RESOURCE REQUEST message indicates 'High Priority', the CRNC shall prohibit the use of the logical resources immediately.

The BLOCK RESOURCE REQUEST message shall include the *Shutdown Timer* IE when the *Blocking Priority Indicator* IE indicates 'Normal Priority'. The CRNC shall prohibit the use of the logical resources if the resources are idle or immediately upon expiry of the shutdown timer specified in the message. New traffic shall not be allowed to use the logical resources while the CRNC waits for the resources to become idle and once the resources are blocked.

If the *Blocking Priority Indicator* IE in the BLOCK RESOURCE REQUEST message indicates 'Low Priority', the CRNC shall prohibit the use of the logical resources when the resources become idle. New traffic shall not be allowed to use the logical resources while the CRNC waits for the resources to become idle and once the resources are blocked.

When the logical resource indicated is a cell, all associated physical channels and transport channels are blocked.


If the resources are successfully blocked, the CRNC shall respond with a BLOCK RESOURCE RESPONSE message. Upon reception of the BLOCK RESOURCE RESPONSE message, the Node B shall consider the logical resources blocked.

#### Interactions with the Unblock Resource procedure:

If the UNBLOCK RESOURCE INDICATION message is received by the CRNC while a Block Resource procedure on the same logical resources is in progress, the CRNC shall cancel the Block Resource procedure and proceed with the Unblock Resource procedure.

If the BLOCK RESOURCE RESPONSE message or the BLOCK RESOURCE FAILURE message is received by the Node B after the Node B has initiated an Unblock Resource procedure on the same logical resources as the ongoing Block Resource procedure, the Node B shall ignore the response to the Block Resource procedure.

### 8.2.4.3 Unsuccessful Operation

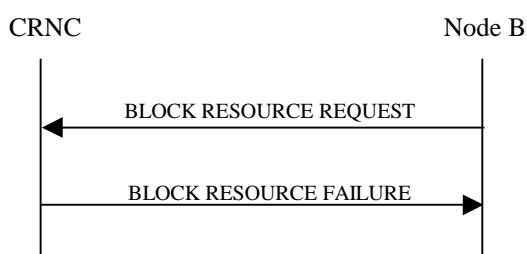

**Figure 7: Block Resource procedure, Unsuccessful case**

The CRNC may reject the request to block the logical resources, in which case the logical resources will remain unaffected and the CRNC shall respond to the Node B with the BLOCK RESOURCE FAILURE message. Upon

reception of the BLOCK RESOURCE FAILURE message, the Node B shall leave the logical resources in the state that they were in prior to the start of the Block Resource procedure.

Typical cause values are as follows:

#### **Protocol Cause**

- Semantic error

#### **Miscellaneous Cause**

- O&M Intervention
- Control processing overload
- HW failure

### **8.2.4.4 Abnormal Conditions**

### **8.2.5 Unblock Resource**

#### **8.2.5.1 General**

The Node B initiates this procedure to indicate to the CRNC that logical resources are now unblocked.

#### **8.2.5.2 Successful Operation**



**Figure 8: Unblock Resource procedure, Successful case**

The procedure is initiated with an UNBLOCK RESOURCE INDICATION message sent from the Node B to the CRNC. Upon reception of the UNBLOCK RESOURCE INDICATION message, the CRNC may permit the use of the logical resources.

When the logical resource indicated is a cell, all associated physical channels and transport channels are unblocked.


#### **8.2.5.3 Abnormal Conditions**

### **8.2.6 Audit Required**

#### **8.2.6.1 General**

The Node B initiates this procedure to request the CRNC to perform an audit of the logical resources at the Node B. This procedure is used to indicate a possible misalignment of state or configuration information

### 8.2.6.2 Successful Operation

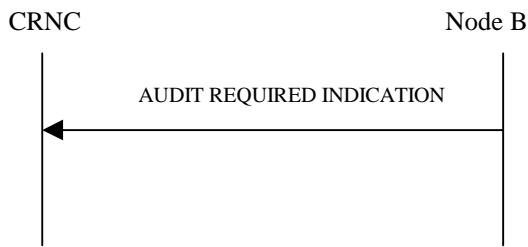

**Figure 9: Audit Required procedure, Successful case**

The procedure is initiated with an AUDIT REQUIRED INDICATION message sent from the Node B to the CRNC.

If the Node B cannot ensure alignment of the state or configuration information, it should initiate the Audit required indication procedure.

Upon receipt of the AUDIT REQUIRED INDICATION message, the CRNC should initiate the Audit procedure.

### 8.2.6.3 Abnormal Conditions


-

## 8.2.7 Audit

### 8.2.7.1 General

This procedure is executed by the CRNC to perform an audit of the configuration and status of the logical resources in the Node B. Additionally, the audit may cause the CRNC and Node B to re-sync to the logical resources known by the CRNC and to the status information from the Node B.

### 8.2.7.2 Successful Operation

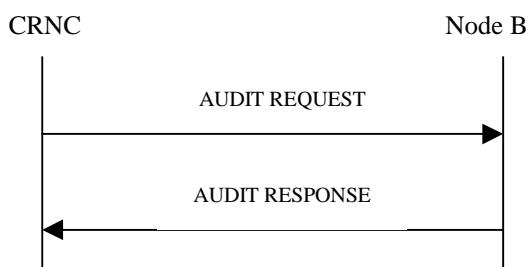

**Figure 10: Audit procedure, Successful case**

The procedure is initiated with an AUDIT REQUEST message sent from the CRNC to the Node B. The configuration returned by the NodeB in the AUDIT RESPONSE shall be the configuration existing upon reception of the AUDIT REQUEST. Upon reception by the Node B, with each pair of *C-ID IE Configuration Generation ID IE* that is present in the message, the Node B compares the stored Configuration Generation ID for the corresponding cell.

For each cell where the *Configuration Generation ID IE* value does not match the stored Configuration Generation ID value, the Node B shall not take any action.

For each cell where the *Configuration Generation ID IE* value matches the stored Configuration Generation ID value, the Node B shall include the *Cell Information IE* group for that cell in the AUDIT RESPONSE message.

The following condition applies to the Primary SCH *Information IE group*, Secondary SCH *Information IE group*, Primary CCPCH *Information IE group*, Secondary CCPCH *Information IE group*, Primary CPICH *Information IE group*, Secondary CPICH *Information IE group*, BCH *Information IE group*, PCH *Information IE group*, PICH *Information IE group*, FACH *Information IE group*, RACH *Information IE group*, and AICH *Information IE group*. The Node B shall include the IE group within the *Cell Information IE group*, if that resource is present in the Node B for that cell.

The Node B shall include in the AUDIT RESPONSE message a *Communication Control Port Information IE group* for each communication control port present in the Node B.

The Node B shall include in the AUDIT RESPONSE message a *Local Cell Information IE group* for each local cell present in the Node B. The Node B shall include the *Number Of Channel Elements IE* if the value is known by the Node B. The Node B shall include the *Maximum DL Power Capability IE* if the value is known by the Node B.

For each cell existing in the Node B but not indicated in the AUDIT REQUEST message, the associated cell configuration information shall be removed from the Node B including any related common physical channels and common transport channels. For each cell not existing in the Node B but indicated in the AUDIT REQUEST message, the Node B shall not take any action.

Upon reception by the CRNC of the AUDIT RESPONSE message, the CRNC compares the received list of C-ID with the expected list of C-IDs.

For each missing cell, a configuration error has occurred and recovery actions should be taken by the CRNC.

### 8.2.7.3 Unsuccessful Operation


### 8.2.7.4 Abnormal Conditions

## 8.2.8 Common Measurement Initiation

### 8.2.8.1 General

This procedure is used by a CRNC to request the initiation of common measurements in a Node B.

### 8.2.8.2 Successful Operation

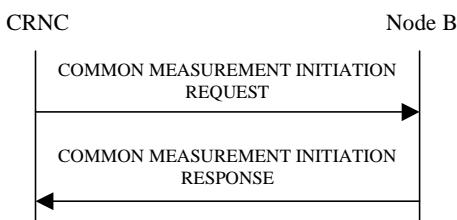

**Figure 11: Measurement Request procedure: Successful Operation**

The procedure is initiated with a COMMON MEASUREMENT INITIATION REQUEST message sent from the CRNC to the Node B using the Node B control port.

Upon reception, the Node B shall initiate the requested measurement according to the parameters given in the request. Unless specified below, the meaning of the parameters are given in other specifications.

[TDD- If the Time Slot Information is provided in the *Common Measurement Object Type IE*, the measurement request shall apply to the requested time slot individually.]

The *Report Characteristics* IE indicates how the reporting of the measurement shall be performed.

If the *Report Characteristics* IE indicates 'On-Demand', the Node B shall report the result of the requested measurement immediately.

If the *Report Characteristics* IE indicates 'Periodic', the Node B shall periodically initiate a Measurement Reporting procedure for this measurement, with the requested report frequency.

If the *Report Characteristics* IE indicates 'Event A', the Node B shall initiate a Measurement Reporting procedure when the measured entity rises above the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the Node B shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE indicates 'Event B', the Node B shall initiate a Measurement Reporting procedure when the measured entity falls below the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the Node B shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE indicates 'Event C', the Node B shall initiate a Measurement Reporting procedure when the measured entity rises more than the requested threshold within the requested time.

If the *Report Characteristics* IE indicates 'Event D', the Node B shall initiate a Measurement Reporting procedure when the measured entity falls more than the requested threshold within the requested time.


If the *Report Characteristics* IE indicates 'Event E', the Node B shall initiate a Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). The Node B shall also initiate a Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (Report B). If the *Report Frequency* IE is provided, the Node B shall initiate Measurement Reporting procedures periodically, with the requested frequency, between Report A and Report B. If 'Measurement Threshold 2' is not present, the Node B shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the Node B shall use the value zero as hysteresis times for both Report A and Report B.

If the *Report Characteristics* IE indicates 'Event F', the Node B shall initiate a Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). The Node B shall also initiate a Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (Report B). If the *Report Frequency* IE is provided, the Node B shall initiate Measurement Reporting procedures periodically, with the requested frequency, between Report A and Report B. If 'Measurement Threshold 2' is not present, the Node B shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the Node B shall use the value zero as hysteresis times for both Report A and Report B.

If at the start of the measurement, the reporting criteria are fulfilled for any of Event A, Event B, Event E or Event F, the Node B shall initiate a Measurement Reporting procedure immediately, and then continue with the measurements as in normal operation.

If the Node B was able to initiate the measurement requested by the CRNC it shall respond with the COMMON MEASUREMENT INITIATION RESPONSE message sent over the Node B control port. The message shall include the same Measurement Id that was used in the measurement request. Only in the case the *Report Characteristics* IE indicated "On-Demand", the COMMON MEASUREMENT INITIATION RESPONSE message shall contain the measurement result.

### 8.2.8.3 Unsuccessful Operation

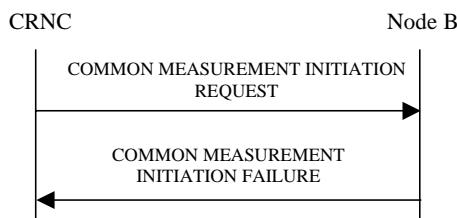

**Figure 12: Measurement Request procedure: Unsuccessful Operation**

If the requested measurement cannot be initiated, the Node B shall send a COMMON MEASUREMENT INITIATION FAILURE message sent over the Node B control port. The message shall include the same Measurement Id that was used in the measurement request and the *Cause* IE set to an appropriate value.

Typical cause values are as follows:

#### **Radio Network Layer Cause**

Measurement not supported for the object.

### 8.2.8.4 Abnormal Conditions


-

### 8.2.9 Common Measurement Report

#### 8.2.9.1 General

This procedure is used by a Node B to report the result of measurements requested by the CRNC with the Measurement Initiation procedure.

#### 8.2.9.2 Successful Operation

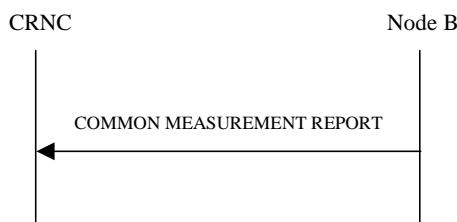

**Figure 13: Measurement Report procedure: Successful Operation**

If the requested measurement reporting criteria are met, the Node B shall initiate a Measurement Reporting procedure. The COMMON MEASUREMENT REPORT message shall use the Node B control port. Unless specified below, the meaning of the parameters are given in other specifications.

The *Common Measurement Id* IE shall be set to the Common Measurement Id provided by the CRNC when initiating the measurement with the Measurement Initiation procedure.

#### 8.2.9.3 Abnormal Conditions

-

### 8.2.10 Common Measurement Termination

#### 8.2.10.1 General

This procedure is used by the CRNC to terminate a measurement previously requested by the Measurement Initiation procedure.

### 8.2.10.2 Successful Operation



**Figure 14: Measurement Termination procedure: Successful Operation**

This procedure is initiated with a COMMON MEASUREMENT TERMINATION REQUEST message, sent from the CRNC to the Node B using the Node B control port.

Upon reception, the Node B shall terminate reporting of measurements corresponding to the Common Measurement Id.

### 8.2.10.3 Abnormal Conditions

## 8.2.11 Common Measurement Failure

### 8.2.11.1 General

This procedure is used by the Node B to notify the CRNC that a measurement previously requested by the Measurement Initiation procedure can no longer be reported.

### 8.2.11.2 Successful Operation



**Figure 15: Measurement Failure procedure: Successful Operation**

This procedure is initiated with a COMMON MEASUREMENT FAILURE INDICATION message, sent from the Node B to the CRNC using the Node B control port, to inform the CRNC that a previously requested measurement no longer can be reported.


### 8.2.11.3 Abnormal Conditions

## 8.2.12 Cell Setup

### 8.2.12.1 General

This procedure is used to set up a cell in Node B. The CRNC takes the cell, identified via the *C-ID* IE, into service and uses the resources in Node B identified via the *Local Cell ID* IE.

### 8.2.12.2 Successful operation

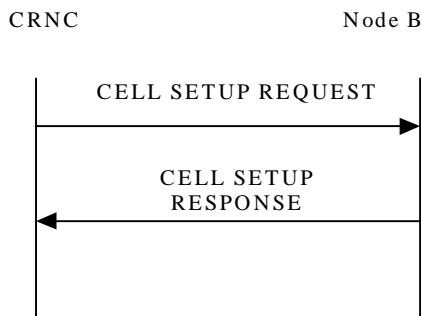

**Figure 6: Cell Setup Successful case**

The procedure is initiated with a CELL SETUP REQUEST message sent from CRNC to Node B. Upon Reception, the Node B shall reserve the necessary resources and configure the new cell according to the parameters given in the message.


[FDD If the CELL SETUP REQUEST message includes the *Secondary CPICH Information IE* group the Node B shall configure and activate the Secondary CPICH in the cell according to received configuration data.

The *Maximum transmission power IE* value shall be stored in the Node B and at any instance of time the total maximum output power in the cell shall not be above this value.

When the cell is successfully configured the Node B shall store the *Configuration Generation ID IE* value and send a CELL SETUP RESPONSE message as a response.

[FDD- When the cell is successfully configured CPICH(s), Primary SCH, Secondary SCH, Primary CCPCH and BCH exist.] [TDD- When the cell is successfully configured PSCH, SCH, Primary CCPCH and BCH exist and the switching-points for the TDD frame structure are defined.]

### 8.2.12.3 Unsuccessful operation

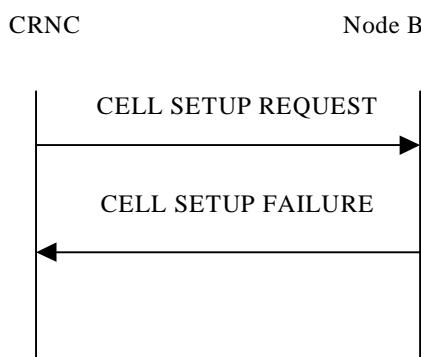

**Figure 7: Cell Setup Unsuccessful case**

If the Node B cannot set up the cell according to the information given in CELL SETUP REQUEST message the CELL SETUP FAILURE message shall be sent to CRNC.

In this case the cell is Non Existing in Node B. The Configuration Generation ID shall not be changed in Node B.

The *Cause IE* shall be set to an appropriate value.

#### 8.2.12.4 Abnormal Conditions


If the CELL SETUP REQUEST message includes a Local Cell ID IE that is Non Existing in Node B the Node B shall send the CELL SETUP FAILURE message as response.

### 8.2.13 Cell Reconfiguration

### 8.2.13.1 General

This procedure is used to reconfigure a cell in Node B.

### 8.2.13.2 Successful operation

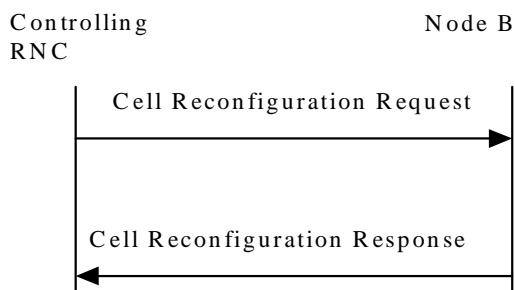

**Figure 8: Cell Reconfiguration Successful case**

The procedure is initiated with a CELL RECONFIGURATION REQUEST message sent from CRNC to Node B. Upon Reception, the Node B shall reconfigure the cell according to the parameters given in the message.

[FDD If the CELL RECONFIGURATION REQUEST message includes the *Primary SCH Information* IE group the Node B shall reconfigure Primary SCH power in the cell according to *Primary SCH Power* IE value.

[FDD If the CELL RECONFIGURATION REQUEST message includes the *Secondary SCH Information* IE group the Node B shall reconfigure Secondary SCH power in the cell according to the *Secondary SCH Power* IE value.

[FDD If the CELL RECONFIGURATION REQUEST message includes the *Primary CPICH Information* IE group the Node B shall reconfigure Primary CPICH power in the cell according to the *Primary CPICH Power* IE value. NodeB shall adjust all the transmitted power levels relative to the Primary CPICH power according to the new value]

[FDD If the CELL RECONFIGURATION REQUEST message includes the *Secondary CPICH Information IE* group the Node B shall reconfigure Secondary CPICH power in the cell according to the *Secondary CPICH Power IE* value.

[TDD If the CELL RECONFIGURATION REQUEST message includes the *PSCH Information* IE group the Node B shall reconfigure PSCH power in the cell according to the *PSCH Power* IE value]

[FDD If the CELL RECONFIGURATION REQUEST message includes the *Primary CCPCH Information* IE group the Node B shall reconfigure BCH power in the cell according to the *BCH Power* IE value.


[TDD - If the CELL RECONFIGURATION REQUEST message includes the *Primary CCPCH Information* IE group the Node B shall reconfigure P-CCPCH power in the cell according to the *P-CCPCH Power* IE value. NodeB shall adjust all the transmitted power levels relative to the Primary CPPCH power according to the new value.]

If the CELL RECONFIGURATION REQUEST message includes the *Maximum Transmission Power IE* the value shall be stored in the Node B and at any instance of time the total maximum output power in the cell shall not be above this value.

[TDD - If the CELL RECONFIGURATION REQUEST message includes the *Timeslot Information* IE group the Node B shall reconfigure switching-point structure in the cell according to the *Timeslot* IE value.]

When the cell is successfully reconfigured the Node B shall store the new *Configuration Generation ID* IE value and send a CELL RECONFIGURATION RESPONSE message as a response.

### 8.2.13.3 Unsuccessful operation

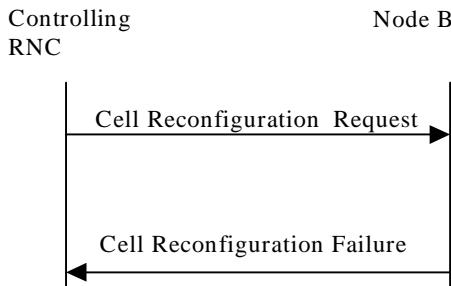

**Figure 9: Cell Reconfiguration Unsuccessful case**

If the Node B cannot reconfigure the cell according to the information given in CELL RECONFIGURATION REQUEST message the CELL RECONFIGURATION FAILURE message shall be sent to CRNC.

In this case, the Node B shall keep the old configuration of the cell and the Configuration Generation ID shall not be changed in Node B.

The Cause IE shall be set to an appropriate value.

(Note.: Remark received that at WG3#7, in tdoc D63 (secretary minutes), it was stated that the failure message should be added with a list of cause values, with one cause value per failed reconfiguration item. It is not clear what functional impact this have and how it should be coded in the CELL RECONFIGURATION FAILURE message.)

### 8.2.13.4 Abnormal Conditions

If the CELL RECONFIGURATION REQUEST message includes a *Local Cell ID* IE that is Non Existing in Node B the Node B shall send the CELL RECONFIGURATION FAILURE message as response.


The *Cause* IE shall be set to an appropriate value.

## 8.2.14 Cell Deletion

### 8.2.14.1 General

This procedure is used to delete a cell in Node B.

### 8.2.14.2 Successful operation

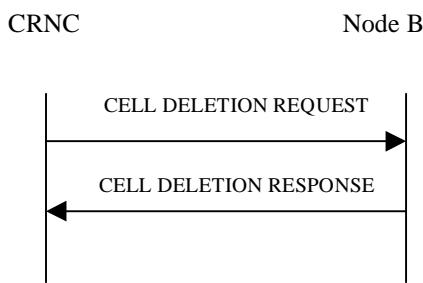

**Figure 10: Cell Deletion Successful case**

The procedure is initiated with a CELL DELETION REQUEST message sent from CRNC to Node B. Upon Reception, the Node B shall remove the cell and any channel within the cell created by the Cell Setup procedure or Common Transport Channel Setup procedure.

When the cell is deleted, the Node B shall send a CELL DELETION RESPONSE message as a response.

#### 8.2.14.3 Unsuccessful operation

#### 8.2.14.4 Abnormal Conditions

If the CELL DELETION REQUEST message includes a *C-ID* IE value that is not existing in Node B the Node B shall respond with the CELL DELETION RESPONSE message.

### 8.2.15 Resource Status Indication

#### 8.2.15.1 General

This procedure is used in six different cases:

1. When a Local Cell becomes Existing at the Node B, it shall be made available to the RNC
2. When a Local Cell is to be deleted in Node B, i.e. become Not Existing, the Local Cell shall be withdrawn from the CRNC
3. When the capabilities of the Local Cell changes at the Node B
4. When a cell has changed its capability and/or its resource operational state at the Node B
5. When common physical channels and/or common transport channels have changed their capabilities at a Node B
6. When a communication control port changed its resource operational state at the Node B

Each of the above cases shall trigger a Resource Indication procedure and the RESOURCE STATUS INDICATION message shall contain the logical resources affected for that case and the cause value when applicable.

#### 8.2.15.2 Successful Operation



**Figure 11: Resource Status Indication**

The procedure is initiated with a RESOURCE STATUS INDICATION message sent from the Node B to CRNC.

When a Local Cell becomes Existing at the Node B, the Node B shall make it available to the CRNC by sending a RESOURCE STATUS INDICATION message with the Local Cell Id IE and the Add/Delete Indicator IE set equal to 'Add'.

When a Local Cell is to be deleted in Node B, i.e. become Not Existing, the Node B shall withdraw the Local Cell from the CRNC by sending a RESOURCE STATUS INDICATION message with the Local Cell Id IE and the Add/Delete Indicator IE set equal to 'Delete'. The Node B shall not withdraw a previously configured cell at the Node B that the CRNC had configured using the Cell Setup procedure, until the CRNC has deleted that cell at the Node B using the Cell Delete procedure.

When the capabilities of a Local Cell changes at the Node B, the Node B shall report the new capability by sending a RESOURCE STATUS INDICATION message with the Local Cell Id. The Add/Delete Indicator IE shall not be

included in the message. The Cause IE in the RESOURCE STATUS INDICATION message shall be set to the appropriate value.

When the capabilities and/or resource operational state of a cell changes at the Node B, the Node B shall report the new capability and/or resource operational state by sending a RESOURCE STATUS INDICATION message with the C-ID IE. The Cause IE in the RESOURCE STATUS INDICATION message shall be set to the appropriate value.

When the capabilities and/or resource operational state of common physical channels and/or common transport channels have changed, the Node B shall report the new capability and/or resource operational state by sending a RESOURCE STATUS INDICATION message with the logical resource. The Cause IE in the RESOURCE STATUS INDICATION message shall be set to the appropriate value.

When the resource operational state of a communication control port has changed, the Node B shall report the new resource operational state by sending a RESOURCE STATUS INDICATION message with the Communication Control Port ID IE. The Cause IE in the RESOURCE STATUS INDICATION message shall be set to the appropriate value.


### 8.2.15.3 Abnormal Conditions

## 8.2.16 System Information Update

### 8.2.16.1 General

The System Information Update procedure performs the scheduling and provision of system information segments broadcast on the BCCH, to the Node B.

### 8.2.16.2 Successful Operation

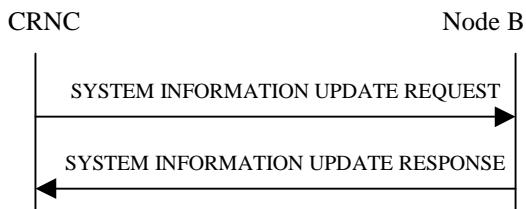

**Figure 12: System Information Update: Successful Case**

The procedure is initiated with a SYSTEM INFORMATION UPDATE REQUEST message sent from the CRNC to the Node B.

If the SYSTEM INFORMATION UPDATE message includes the BCCH Modification Time IE , the new segments provided in the SYSTEM INFORMATION UPDATE REQUEST message shall be applied by Node B at the first time instance starting from the SFN value set by the BCCH Modification Time IE. If no BCCH Modification Time IE is included, the new segments shall be applied as soon as possible.

The Node B shall determine the correct cell system frame number(s) (SFN) for transmission of the segments of system information, from the scheduling parameters provided in the SYSTEM INFORMATION UPDATE REQUEST message. The SFN for transmitting the segments shall be determined by the SIB SG REP IE and SIB SG POS IE such that:

- $SFN \bmod IB\_SG\_REP = IB\_SG\_POS$

If the SYSTEM INFORMATION UPDATE REQUEST message contains Master Information Block (MIB) segments in addition to SIB segments, the MIB segments shall be updated last in the physical channel scheduling cycle by the Node B.

The Segment Type IE shall be used by the Node B to concatenate several segments into one BCH transport block. The allowed combinations of concatenation are specified in TS 25.331.


If the SIB Deletion Indicator IE value is set to 'Deletion' the Node B shall delete the SIB of the type indicated by the SIB Type IE from the transmission schedule on BCCH.

If the SIB Originator IE value is set to 'NodeB' the Node B shall create the SIB segment of the SIB type given by the IB Type IE and autonomously update the SIB segment and apply the scheduling and repetition as given by the IB SG REP IE and IB SG POS IE.

SIBs originating from the Node B can only be SIBs containing information that the NodeB can obtain on its own and use the expiration timer feature.

If the Node B successfully completes the updating of the physical channel scheduling cycle according to the parameters given in the SYSTEM INFORMATION UPDATE REQUEST message, it shall respond to the CRNC with a SYSTEM INFORMATION UPDATE RESPONSE message.

### 8.2.16.3 Unsuccessful Operation

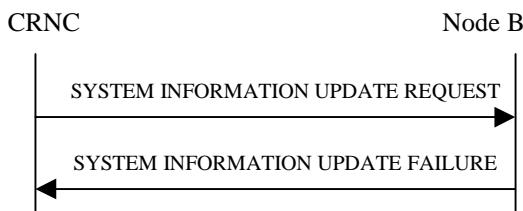

**Figure 13: System Information Update: Unsuccessful Case**

If the Node B is unable to update the physical channel scheduling cycle according to all the parameters given in the SYSTEM INFORMATION UPDATE REQUEST message, it shall respond with a SYSTEM INFORMATION UPDATE FAILURE message with an appropriate cause value. Possible cause values are:

- Insufficient physical channel resources
- Hardware failure
- Processor overload
- C-ID not defined
- O&M Intervention
- Unspecified failure
- SIB origination in Node B not supported

In this case, the Node B shall not incorporate any of the requested changes into the physical channel scheduling cycle, and the previous system information configuration shall remain intact.


### 8.2.16.4 Abnormal Conditions

## 8.2.17 Radio Link Setup

### 8.2.17.1 General

This procedure is used for establishing the necessary resources for a new Node B Communication Context in the Node B.

### 8.2.17.2 Successful operation

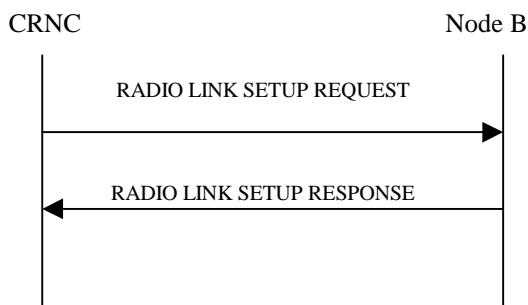

**Figure 14: RL Setup procedure: Successful case**

The procedure is initiated with a RADIO LINK SETUP REQUEST message sent from the CRNC to Node B.

Upon reception of RADIO LINK SETUP REQUEST message, the Node B shall reserve necessary resources and configure the new Radio Link(s) according to the parameters given in the message.

[FDD – The RL Setup procedure can be used to setup one or more radio links. The procedure shall include the establishment of one or more DCHs on all radio links, and in addition, it can include the establishment of one or more DSCHs on one radio link.]

[TDD – The RL Setup procedure is used for setup of one radio link including one or more transport channels. The transport channels can be a mix of DCHs, DSCHs, and USCHs. The Radio Link Setup Request message shall include the required TFS and TFCS for the DCH, DSCH and USCH channels.]

[FDD] The *Diversity Control Field* IE indicates for each RL (except the first RL in the message) whether the Node B shall combine the concerned RL or not. If the *Diversity Control Field* IE indicates, "may be combined with already existing RLs", then Node B shall decide for either of the alternatives. Diversity combining is applied to Dedicated Transport Channels (DCH), i.e. it is not applied to the DSCHs. When a new RL is to be combined, the NodeB shall choose which RL(s) to combine it with.

If the RADIO LINK SETUP REQUEST message includes the *DCH Combination Indicator* IE for a DCH to be added, the Node B shall

- Treat all DCHs with the same value of this IE as a set of co-ordinated DCHs and
- Include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration

The received *Frame Handling Priority* IE specified for each Transport Channel should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.

[FDD] If the *Propagation Delay* IE is present, the Node B may use this information to speed up the detection of L1 synchronization.

The included *RLC Mode* IE may be used by the NodeB to optimise the power control.

[FDD] In FDD mode, the *UL Eb/No* IE included in the message shall be used by the Node B as initial UL Eb/No target for the UL power control.

The Node B shall start the DL transmission using the initial DL power specified in the message. The DL power can then vary accordingly to the fast power control, but shall always be kept within the maximum and minimum limit specified in the RL SETUP REQUEST message.

If the RLs are successfully setup, the Node B shall start reception on the new RL(s) and respond with a RADIO LINK SETUP RESPONSE message.

[FDD] The Node B shall indicate with the *Diversity Indication* IE whether the RL is combined or not. In case of combining, only the *Reference RL ID* IE shall be included to indicate one of the existing RLs that the concerned RL is

combined with. In case of not combining the Node B shall include in the RL SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each DCH of this RL.


[TDD – The NodeB shall include in the RADIO LINK SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each DCH of this RL.]

The NodeB shall include in the RADIO LINK SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each DSCH of this RL.

[TDD – The NodeB shall include in the RADIO LINK SETUP RESPONSE the *Binding ID* IE and *Transport Layer Address* IE for the transport bearer to be established for each USCH of this RL.]

In case of coordinated DCH, the *Binding ID* IE and the *Transport Layer Address* IE shall be specify for only one of the coordinated DCHs.

### 8.2.17.3 Unsuccessful Operation

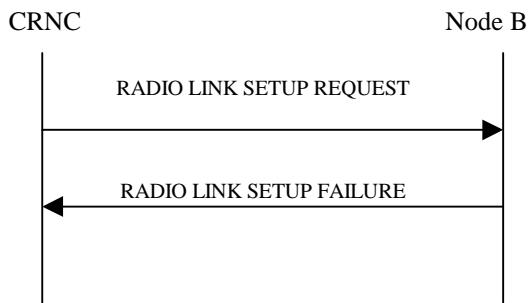

**Figure 15: RL Setup procedure: Unsuccessful case**

If the establishment of at least one radio link is unsuccessful, the Node B shall respond with a RADIO LINK SETUP FAILURE message. The message contains the failure cause in the *Cause* IE.

If some radio links were established successfully, the Node B shall indicate this in the RADIO LINK SETUP FAILURE message in the same way as in the RADIO LINK SETUP RESPONSE message.

Typical cause values are as follows:

#### Radio Network Layer Cause

- RL Already Activated/allocated

#### Transport Layer Cause

- Transport Resources Unavailable

#### Protocol Cause

- Semantic error

#### Miscellaneous Cause

- O&M Intervention
- Unspecified Failure
- Control processing overload
- HW failure

### 8.2.17.4 Abnormal Conditions

-


## 8.3 NBAP Dedicated Procedures

### 8.3.1 Radio Link Addition

#### 8.3.1.1 General

This procedure is used for establishing the necessary resources in the Node B for one or more additional RLs towards a UE when there is already a Node B communication context for this UE in the Node B.

#### 8.3.1.2 Successful operation

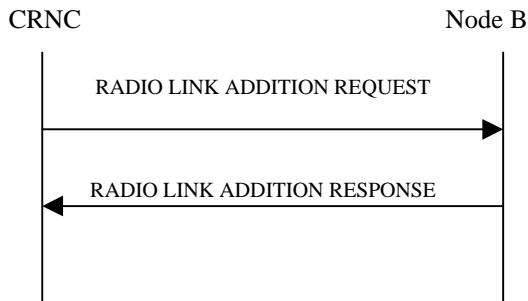

**Figure: 16 RL Addition procedure: Successful case**

The procedure is initiated with a RADIO LINK ADDITION REQUEST message sent from the CRNC to the Node B.

Upon reception, the Node B shall reserve the necessary resources and configure the new RL(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

[FDD The *Diversity Control Field* IE indicates for each RL whether the Node B shall combine the new RL with existing RL(s) or not. ].[TDD - The *Diversity Control Field* IE indicates whether the Node B shall reuse the Iub interface Transport Bearers of the old RL for the new RL.] If the *Diversity Control Field* IE indicates, "may be combined with already existing RLs", then Node B shall decide for any of the alternatives. When a new RL is to be combined, the NodeB shall choose which RL(s) to combine it with.

If the RADIO LINK ADDITION REQUEST message includes the *Initial DL Transmission Power* IE, the Node B shall apply the given power to the transmission on each DL Channelisation Code of the RL when starting transmission. If no *Initial DL Transmission power* IE is included, the Node B shall use any transmission power level currently used on already existing RL's for this UE.

If the RADIO LINK ADDITION REQUEST message includes the *Maximum DL power* IE, the Node B shall store this value and never transmit with a higher power on any DL Channelisation Code of the RL. If no *Maximum DL power* IE is included, any Maximum DL power stored for already existing RLs for this UE shall be applied.

If the RADIO LINK ADDITION REQUEST message includes the *Minimum DL power* IE, the Node B shall store this value and never transmit with a lower power on any DL Channelisation Code of the RL. If no *Minimum DL power* IE is included, any Minimum DL power stored for already existing RLs for this UE shall be applied.

[FDD] If the RADIO LINK ADDITION REQUEST message contains an *SSDT Cell Identity* IE the Node B may activate SSDT for the concerned new RL , with the indicated cell identity used for that RL.

If all requested RLs are successfully added, the Node B shall respond with a RADIO LINK ADDITION RESPONSE message.

[FDD] In the case of combining an RL with existing RL(s) the Node B shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that the RL is combined. In this case the Reference RL ID shall be included to indicate one of the existing RLs that the new RL is combined with.

[FDD] In the case of not combining an RL with existing RL(s), the Node B shall indicate in the RADIO LINK ADDITION RESPONSE message with the Diversity Indication that no combining is done. In this case the Node B shall

include both the Transport Layer Address and the binding ID for the transport bearer to be established for each DCH of the RL in the RADIO LINK ADDITION RESPONSE message.


[TDD - In the case of not reusing the transport bearers of the old RL for the new RL, the Node B shall indicate in the RADIO LINK ADDITION RESPONSE message with the "Diversity Indication" that no transport bearer reuse is done. In this case the Node B shall include both the Transport Layer Address and the Binding ID for the transport bearer to be established for each DCH, DSCH and USCH of the RL in the RADIO LINK ADDITION RESPONSE message.]

In case of coordinated DCH, the binding ID and the transport address shall be included for only one of the co-ordinated DCHs.

[FDD] Irrespective of SSDT activation, the Node B shall include in the RADIO LINK ADDITION RESPONSE message an indication concerning the capability to support SSDT on this RL. Only if the RADIO LINK ADDITION REQUEST message requested SSDT activation and the RADIO LINK ADDITION RESPONSE message indicates that the SSDT capability is supported for this RL, SSDT is activated in the Node B.

[FDD] After sending of the RADIO LINK ADDITION RESPONSE message the Node B shall continuously attempt to obtain UL synchronisation and start reception on the new RL. The Node B shall start transmission on the new RL after synchronisation is achieved in the Iub user plane as specified in 25.427.

### 8.3.1.3 Unsuccessful operation

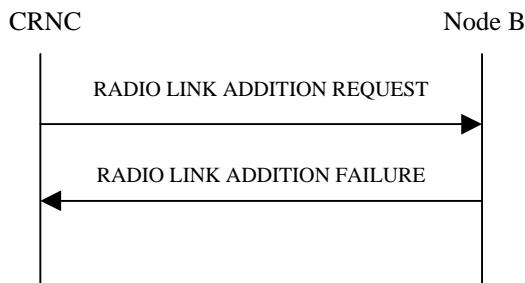

**Figure 17: RL Addition procedure: Unsuccessful case**

If the establishment of at least one RL is unsuccessful, the Node B shall send a RADIO LINK ADDITION FAILURE as response indicating the failure cause.

If some RL(s) were established successfully, the Node B shall indicate this in the RADIO LINK ADDITION FAILURE message in the same way as in the RADIO LINK ADDITION RESPONSE message.

Typical cause values are as follows:

#### Radio Network Layer Cause

- RL Already Activated/allocated

#### Transport Layer Cause

- Transport Resources Unavailable

#### Protocol Cause

- Semantic error

#### Miscellaneous Cause

- O&M Intervention
- Unspecified Failure
- Control processing overload
- HW failure


### 8.3.1.4 Abnormal conditions

## 8.3.2 Synchronised Radio Link Reconfiguration Preparation

### 8.3.2.1 General

The Synchronised Radio Link Reconfiguration Preparation procedure is used to prepare a new configuration of all Radio Links related to one UE-UTRAN connection within a Node B.

### 8.3.2.2 Successful Operation

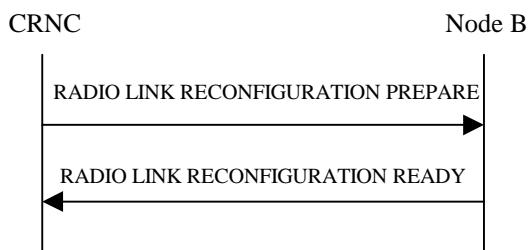

**Figure 18: Synchronised Radio Link Reconfiguration procedure, Successful Case**

The Synchronised Radio Link Reconfiguration Preparation procedure is initiated by the CRNC by sending the message RADIO LINK RECONFIGURATION PREPARE to the Node B. The message shall use the Communication Control Port assigned for this Node B Communication Context.

Upon reception, the DRNS shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

#### DCH Modification:

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Frame Handling Priority* IE for a DCH to be modified, the Node B should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set (UL)* IE for a DCH to be modified, the Node B shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *Transport Format Set (DL)* IE for a DCH to be modified, the Node B shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *UL DCH FP Mode* IE for a DCH to be modified, the Node B shall apply the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *ToAWS* IE for a DCH to be modified, the Node B shall apply the new ToAWS in the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *ToAWE* IE for a DCH to be modified, the Node B shall apply the new ToAWE in the user plane for this DCH in the new configuration.

#### DCH Addition:

If the RADIO LINK RECONFIGURATION PREPARE message includes any DCH to be added to the Radio Link(s), the Node B shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCH in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the *DCH Combination Indicator* IE for a DCH to be added, the Node B shall:

1. treat all DCHs with the same value of this IE as a set of coordinated DCHs and
2. include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration

The Node B should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.

The Node B may use the included *RLC Mode* IE to optimise the power control.

The Node B shall use the included *UL DCH FP Mode* IE for a DCH to be added as the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

The Node B shall use the included *ToAWS* IE for a DCH to be added as the new Time of Arrival Window Start Point in the user plane for this DCH in the new configuration.

The Node B shall use the included *ToAWE* IE for a DCH to be added as the new Time of Arrival Window End Point in the user plane for this DCH in the new configuration.

#### **DCH Deletion:**

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be deleted from the Radio Link(s), the Node B shall not include this DCH in the new configuration.

If of all the DCHs belonging to a set of coordinated DCHs are requested to be deleted, the Node B shall not include this set of coordinated DCHs in the new configuration.

#### **Physical Channel Modification:**

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *Uplink Scrambling Code* IE, the Node B shall apply this Uplink Scrambling Code to the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Uplink Channelisation Code* IEs, the Node B shall apply the new Uplink Channelisation Code(s) in the new configuration.]

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *Downlink Channelisation Code* IEs, the Node B shall apply the new Downlink Channelisation Code(s) in the new configuration.]

[TDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *UL DPCH Information* IE groups, the Node B shall apply the new UL physical channel(s) setting in the new configuration.]

[TDD - If the RADIO LINK RECONFIGURATION PREPARE message includes one or more *DL DPCH Information* IE groups, the Node B shall apply the new physical channel(s) setting in the new configuration.]

The Node B shall use the *TFCS (UL)* IE when reserving resources for the uplink of the new configuration. The DRNS shall apply the new TFCS in the Uplink of [TDD – the CCTrCH of] the new configuration.

The Node B shall use the *TFCS (DL)* IE when reserving resources for the downlink of the new configuration. The DRNS shall apply the new TFCS in the Downlink of [TDD – the CCTrCH of] the new configuration.

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes on the *UL DPCCH Structure* IE, group the Node B shall set the new Uplink DPCCH Structure to the new configuration.]

If the RADIO LINK RECONFIGURATION PREPARE includes the *Maximum DL Power* IE, the Node B shall apply this value to the new configuration and never transmit with a higher power on any Downlink Channelisation Code of the Radio Link once the new configuration is being used.

If the RADIO LINK RECONFIGURATION PREPARE includes the *Minimum DL Power* IE, the Node B shall apply this value to the new configuration and never transmit with a lower power on any Downlink Channelisation Code of the Radio Link once the new configuration is being used.

#### **SSDT Activation/Deactivation:**

[FDD - If the RADIO LINK RECONFIGURATION PREPARE message includes the *SSDT Indication* IE set to "SSDT Active in the UE", the Node B may activate SSDT using the *SSDT Cell Identity* IE and *SSDT Cell Identity Length* IE in the new configuration.

If the RADIO LINK RECONFIGURATION PREPARE message includes the SSDT Indication IE set to "SSDT not Active in the UE", the Node B shall deactivate SSDT in the new configuration.]

#### **DSCH Addition/Modification/Deletion:**

[FDD] It is FFS how the Node B shall treat any included DSCH Information.


[TDD – The RADIO LINK RECONFIGURATION PREPARE message shall include DSCH information and USCH information for the DSCHs and USCHs to be added/modified/deleted. The NodeB shall use this information to add/modify/delete the indicated DSCH and USCH channels to/from the radio link, in the same way as the DCH info is used to add/modify/release DCHs. – It shall include in the RADIO LINK RECONFIGURATION READY message the Transport Layer Address and the Binding ID of the DCHs/DSCHs/USCHs being added or modified.]

If the requested modifications are allowed by the Node B and the Node B has successfully reserved the required resources for the new configuration of the Radio Link(s), it shall respond to the CRNC with the RADIO LINK RECONFIGURATION READY message.

In case of a set of coordinated DCHs requiring a new transport bearer on Iub DCH-to-be-added group or DCH-to-be-modified group shall be included only for one of the DCH in the set of coordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the Node B, the RL Information Response IE group shall be included only for one of the combined RLs.

#### **8.3.2.3 Unsuccessful Operation**

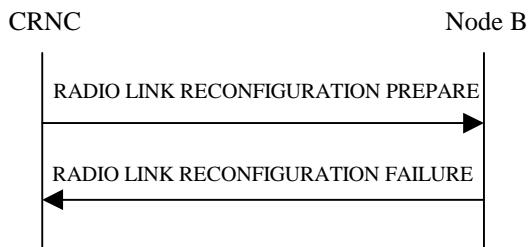

**Figure 19:Synchronised Radio Link Reconfiguration procedure, Unsuccessful Case**

If the Node B cannot reserve the necessary resources for all the new DCHs of one set of coordinated DCHs requested to be added, it shall regard the Synchronised Radio Link Reconfiguration procedure as having failed.

If the requested Synchronised Radio Link Reconfiguration procedure fails for one or more RLs the Node B shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC, indicating the reason for failure.

Typical cause values are as follows:

##### **Radio Network Layer Cause**

- RL Already Activated/allocated

##### **Transport Layer Cause**

- Transport Resources Unavailable

##### **Protocol Cause**

- Semantic error

##### **Miscellaneous Cause**

- O&M Intervention
- Unspecified Failure

- Control processing overload
- HW failure

### 8.3.2.4 Abnormal Conditions

If only a subset of all the DCHs belonging to a set of coordinated DCHs is requested to be deleted, the Node B shall regard the Synchronised Radio Link Reconfiguration Preparation procedure as having failed and the Node B shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC with.

## 8.3.3 Synchronised Radio Link Reconfiguration Commit

### 8.3.3.1 General

This procedure is used to order the Node B to switch to the new configuration for the Radio Link(s) within the Node B, previously prepared by the Synchronised Radio Link Preparation procedure.

The message shall use the Communication Control Port assigned for this Node B Communication Context.

### 8.3.5.2 Successful Operation



**Figure 20:Synchronised Radio Link Reconfiguration Commit procedure, Successful Operation**

The Node B shall switch to the new configuration previously prepared by the Synchronised RL Reconfiguration procedure at the CFN requested by the CRNC when receiving the RADIO LINK RECONFIGURATION COMMIT message from the CRNC.

### 8.3.5.3 Abnormal Conditions

If the Node B receives the RADIO LINK RECONFIGURATION COMMIT message from the CRNC when there is no new configuration for the Radio Link(s) within the Node B, previously prepared by the Synchronised Radio Link Preparation procedure, the message shall be ignored.

## 8.3.4 Synchronised Radio Link Reconfiguration Cancellation

### 8.3.4.1 General

This procedure is used to order the Node B to release the new configuration for the Radio Link(s) within the Node B, previously prepared by the Synchronised Radio Link Preparation procedure.

The message shall use the Communication Control Port assigned for this Node B Communication Context.

### 8.3.4.2 Successful Operation



**Figure 21:Synchronised Radio Link Reconfiguration Cancellation Procedure, Successful Case**

The NodeB shall release the new configuration previously prepared by the Synchronised RL Reconfiguration Preparation procedure and continue using the old configuration when receiving the RADIO LINK RECONFIGURATION CANCEL message from the CRNC.

### 8.3.4.3 Abnormal Conditions

If the NodeB receives the RADIO LINK RECONFIGURATION CANCEL message from the CRNC when there is no new configuration for the Radio Link(s) within the Node B, previously prepared by the Synchronised Radio Link Preparation procedure, the message shall be ignored.


## 8.3.5 Unsynchronised Radio Link Reconfiguration

### 8.3.5.1 General

The Unsynchronised Radio Link Reconfiguration procedure is used to reconfigure Radio Link(s) related to one UE-UTRAN connection within a Node B.

The Unsynchronised RL Reconfiguration procedure is used when there is no need to synchronise the time of the switching from the old to the new configuration in one Node B used for a UE-UTRAN connection with any other Node B also used for the UE –UTRAN connection.

### 8.3.5.2 Successful Operation

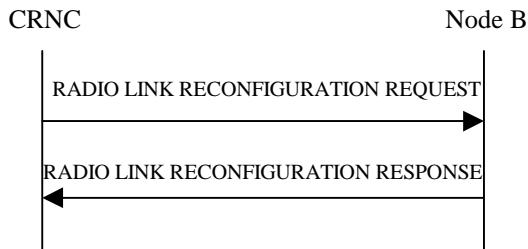

**Figure 22: Unsynchronised Radio Link Reconfiguration Procedure, Successful Case**

The Unsynchronised Radio Link Reconfiguration procedure is initiated by the CRNC by sending the message RADIO LINK RECONFIGURATION REQUEST to the Node B. The message shall use the Communication Control Port assigned for this Node B Communication Context.

Upon reception, the DRNS shall modify the configuration of the Radio Link(s) according to the parameters given in the message. Unless specified below, the meaning of parameters is specified in other specifications.

#### DCH Modification:

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *Frame Handling Priority* IE for a DCH to be modified, the Node B should store this information for this DCH in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the Node B once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *Transport Format Set (UL)* IE for a DCH to be modified, the Node B shall apply the new Transport Format Set in the Uplink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *Transport Format Set (DL)* IE for a DCH to be modified, the Node B shall apply the new Transport Format Set in the Downlink of this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *UL DCH FP Mode* IE for a DCH to be modified, the Node B shall apply the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *ToAWS* IE for a DCH to be modified, the Node B shall apply the new ToAWS in the user plane for this DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *ToAWE* IE for a DCH to be modified, the Node B shall apply the new ToAWE in the user plane for this DCH in the new configuration.

#### **DCH Addition:**

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be added to the Radio Link(s), the Node B shall reserve necessary resources for the new configuration of the Radio Link(s) according to the parameters given in the message and include these DCH in the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *DCH Combination Indicator* IE for a DCH to be added, the DRNS shall.

1. Treat all DCHs with the same value of this IE as a set of coordinated DCHs and
2. Include this DCH in the new configuration only if it can include all DCHs with the same value of the *DCH Combination Indicator* IE in the new configuration.

The Node B should store the *Frame Handling Priority* IE received for a DCH to be added in the new configuration. The received Frame Handling Priority should be used when prioritising between different frames in the downlink on the radio interface in congestion situations within the DRNS once the new configuration has been activated.

If the RADIO LINK RECONFIGURATION REQUEST message includes the *RLC Mode* IE, the Node B may use this information to optimise the power control.

The Node B shall use the included *UL DCH FP Mode* IE for a DCH to be added as the new DCH FP Mode in the Uplink of the user plane for this DCH in the new configuration.

The Node B shall use the included *ToAWS* IE for a DCH to be added as the new Time of Arrival Window Start Point in the user plane for this DCH in the new configuration.

The Node B shall use the included *ToAWE* IE for a DCH to be added as the new Time of Arrival Window End Point in the user plane for this DCH in the new configuration.

#### **DCH Deletion:**

If the RADIO LINK RECONFIGURATION REQUEST message includes any DCH to be deleted from the Radio Link(s), the Node B shall not include this DCH in the new configuration.

If of all the DCHs belonging to a set of coordinated DCHs are requested to be deleted, the Node B shall not include this set of coordinated DCHs in the new configuration.

#### **Physical Channel Modification:**

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *TFCS (UL)* IE, the Node B shall apply the new TFCS in the Uplink of [TDD – the CCTrCH of] the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST message includes on the *TFCS (DL)* IE, the Node B shall apply the new TFCS in the Downlink of [TDD – the CCTrCH of] the new configuration.

If the RADIO LINK RECONFIGURATION REQUEST includes the *Maximum DL Power* IE, the Node B shall apply this value to the new configuration and never transmit with a higher power on any Downlink Channelisation Code of the Radio Link once the new configuration is being used.

If the RADIO LINK RECONFIGURATION REQUEST includes the *Minimum DL Power* IE, the Node B shall apply this value to the new configuration and never transmit with a lower power on any Downlink Channelisation Code of the Radio Link once the new configuration is being used.

#### **DSCH Addition/Modification/Deletion:**

[FDD] It is FFS how the Node B shall treat any included DSCH Information.

[TDD – The RADIO LINK RECONFIGURATION REQUEST message shall include DSCH information and USCH information for the DSCHs and USCHs to be added/modified/deleted. The NodeB shall use this information to


add/modify/delete the indicated DSCH and USCH channels to/from the radio link, in the same way as the DCH info is used to add/modify/release DCHs. – It shall include in the RADIO LINK RECONFIGURATION RESPONSE message the Transport Layer Address and the Binding ID of the DCHs/DSCHs/USCHs being added or modified.]

If the requested modifications are allowed by the Node B, the Node B has successfully allocated the required resources, and changed to the new configuration it shall respond to the CRNC with the RADIO LINK RECONFIGURATION RESPONSE message.

In case of a set of coordinated DCHs requiring a new transport bearer on Iub, the DCH-to-be-added group or DCH-to-be-modified group shall be included for one of the DCH in the set of coordinated DCHs.

In case of a Radio Link being combined with another Radio Link within the Node B, RL Information Response IE group shall be included only for one of the combined Radio Links.

### 8.3.5.1 Unsuccessful Operation

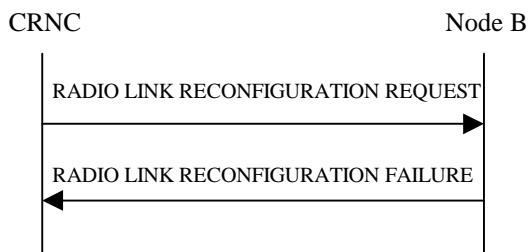

**Figure 23: Unsynchronised Radio Link Reconfiguration procedure, Successful Case**

If the DRNS cannot allocate the necessary resources for all the new DCHs of one set of coordinated, DCHs requested to be set-up it shall regard the Synchronised Radio Link Reconfiguration procedure as having failed.

If the requested Unsynchronised Radio Link Reconfiguration procedure fails for one or more Radio Link(s) the Node B shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC, indicating the reason for failure.

Typical cause values are as follows:

#### Radio Network Layer Cause

- RL Already Activated/allocated

#### Transport Layer Cause

- Transport Resources Unavailable

#### Protocol Cause

- Semantic error

#### Miscellaneous Cause

- O&M Intervention
- Unspecified Failure
- Control processing overload
- HW failure

### 8.3.5.2 Abnormal Conditions


If only a subset of all the DCHs belonging to a set of coordinated DCHs is requested to be deleted, the Node B shall regard the Synchronised Radio Link Reconfiguration procedure as having failed and shall send the RADIO LINK RECONFIGURATION FAILURE message to the CRNC.

## 8.3.6 Radio Link Deletion

### 8.3.6.1 General

The Radio Link Deletion procedure is used to release the resources in a Node B for one or more established radio links towards a UE.

### 8.3.6.2 Successful Operation

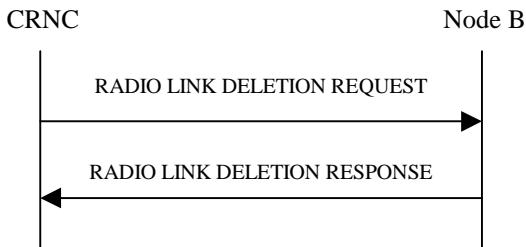

**Figure 24: Radio Link Deletion: Successful Case**

The procedure is initiated with a RADIO LINK DELETION REQUEST message sent from the CRNC to the Node B.

Upon receipt of this message, the Node B shall delete the radio link(s) identified in the message and release all associated resources and respond to the CRNC with a RADIO LINK DELETION RESPONSE message.

### 8.3.6.3 Unsuccessful Operation

### 8.3.6.4 Abnormal Conditions

## 8.3.7 DL Power Control (for FDD only)

### 8.3.7.1 General

The purpose of this procedure is to balance the DL transmission powers of one or more Radio Links used for the related RRC connection within the NodeB. The DL POWER CONTROL procedure may be initiated by the CRNC at any time when the NodeB communication context exists, irrespective of other ongoing CRNC initiated dedicated NBAP procedures towards this NodeB communication context. The only exception occurs when the CRNC has requested the deletion of the last RL via this NodeB, in which case the DL POWER CONTROL procedure shall no longer be initiated.

### 8.3.7.2 Successful Operation



**Figure 25: DL Power Control Procedure**

The procedure is initiated by the CRNC sending a DL POWER CONTROL REQUEST message to the Node B.

On reception, if the message contains the *DL Reference Power* IE, the Node B shall perform the power balancing (see below) for all radio links associated with the context identified by the *Node B Communication Context Id* IE.

Alternatively, if the message contains the *DL Reference Power Information* IE group, the Node B shall perform the power balancing (see below) for all radio links addressed in the message.

The Node B performs the power balancing by using the received power.

**Editor's Note: FFS (currently we only have "using the received desired DL reference power as a reference for adjusting the applied DL power"), which I don't think is sufficiently precise!**


### 8.3.7.3 Abnormal Conditions

### 8.3.8 Dedicated Measurement Initiation

#### 8.3.8.1 General

This procedure is used by a CRNC to request the initiation of dedicated measurements in a Node B.

#### 8.3.8.2 Successful Operation

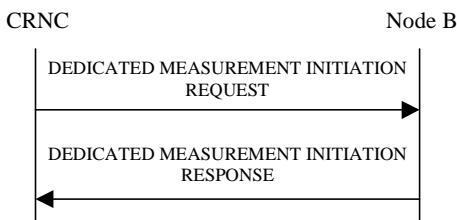

**Figure 26: Measurement Request procedure: Successful Operation**

The procedure is initiated with a DEDICATED MEASUREMENT INITIATION REQUEST message sent from the CRNC to the Node B using the communication control port assigned to the Node B communication context.

Upon reception, the Node B shall initiate the requested measurement according to the parameters given in the request. Unless specified below the meaning of the parameters are given in other specifications.

If the Node B Communication Context Id IE equals the reserved value 'All NBCC', this measurement request shall apply for all current and future Node B Communication Contexts that can be contacted via the current communication control port. Otherwise, this measurement request shall apply for the requested Node B Communication Context Id only.

If no RL Information is provided in the *Dedicated Measurement Object* IE, the measurement reports shall give the aggregated result for all radio links within the requested Node B Communication Context. If RL Information is provided in the request, the measurement request shall apply for the requested radio links individually.

[TDD - If DPCH Id is provided within the RL Information the measurement request shall apply for the requested physical channel individually.]

The *Report Characteristics* IE indicates how the reporting of the measurement shall be performed.

If the *Report Characteristics* IE indicates 'On-Demand', the Node B shall return the result of the measurement immediately.

If the *Report Characteristics* IE indicates 'Periodic', the Node B shall periodically initiate a Measurement Report procedure for this measurement, with the requested report frequency.

If the *Report Characteristics* IE indicates 'Event A', the Node B shall initiate a Measurement Reporting procedure when the measured entity rises above the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the Node B shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE indicates 'Event B', the Node B shall initiate a Measurement Reporting procedure when the measured entity falls below the requested threshold and stays there for the requested hysteresis time. If no hysteresis time is given, the Node B shall use the value zero for the hysteresis time.

If the *Report Characteristics* IE indicates 'Event C', the Node B shall initiate a Measurement Reporting procedure when the measured entity rises more than the requested threshold within the requested time.

If the *Report Characteristics* IE indicates 'Event D', the Node B shall initiate a Measurement Reporting procedure when the measured entity falls more than the requested threshold within the requested time.

If the *Report Characteristics* IE indicates 'Event E', the Node B shall initiate a Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). The Node B shall also initiate a Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (Report B). If the *Report Frequency* IE is provided, the Node B shall send shall initiate Measurement Reporting procedures periodically, with the requested frequency, between Report A and Report B. If 'Measurement Threshold 2' is not present, the Node B shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the Node B shall use the value zero as hysteresis times for both Report A and Report B.


If the *Report Characteristics* IE indicates 'Event F', the Node B shall initiate a Measurement Reporting procedure when the measured entity falls below the 'Measurement Threshold 1' and stays there for the 'Measurement Hysteresis Time' (Report A). The Node B shall also initiate a Measurement Reporting procedure when the measured entity rises above the 'Measurement Threshold 2' and stays there for the 'Measurement Hysteresis Time' (Report B). If the *Report Frequency* IE is provided, the Node B shall send shall initiate Measurement Reporting procedures periodically, with the requested frequency, between Report A and Report B. If 'Measurement Threshold 2' is not present, the Node B shall use 'Measurement Threshold 1' instead. If no 'Measurement Hysteresis Time' is provided, the Node B shall use the value zero as hysteresis times for both Report A and Report B.

If at the start of the measurement, the reporting criteria are fulfilled for any of Event A, Event B, Event E or Event F, the Node B shall initiate a Measurement Reporting procedure immediately, and then continue with the measurements as in normal operation.

If the NodeB was able to initiate the measurement requested by the DRNC it shall respond with the DEDICATED MEASUREMENT INITIATION RESPONSE message using the communication control port assigned to the Node B communication context. The message shall include the same Measurement Id that was used in the measurement request.

Only in the case the *Report Characteristics* IE indicated "On-Demand", the COMMON MEASUREMENT INITIATION RESPONSE message shall contain the measurement result. In this case also the *Dedicated Measurement Object* IE shall be included if it was included in the request message.

### 8.3.8.3 Unsuccessful Operation

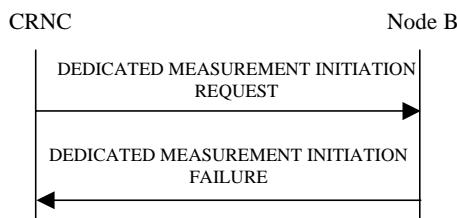

**Figure 27: Measurement Request procedure: Unsuccessful Operation**

If the requested measurement cannot be initiated, the Node B shall send a DEDICATED MEASUREMENT INITIATION FAILURE message using the communication control port assigned to the Node B communication context. The message shall include the same Measurement Id that was used in the measurement initiation request and the *Cause* IE set to an appropriate value.

Typical cause values are as follows:

#### Radio Network Layer cause

- Measurement not supported for the object

#### **Miscellaneous Cause**

- O&M Intervention
- Control processing overload
- HW failure

#### **8.3.8.4 Abnormal Conditions**

### **8.3.9 Dedicated Measurement Reporting**

#### **8.3.9.1 General**

This procedure is used by the Node B to report the result of measurements requested by the CRNC with the Measurement Initiation procedure. The NodeB is allowed to initiate the DEDICATED MEASUREMENT REPORTING message at any time after having sent the RADIO LINK SETUP RESPONSE message, as long as the NodeB communication context exists.

#### **8.3.9.2 Successful Operation**



**Figure 28: Measurement Report procedure: Successful Operation**

If the requested measurement reporting criteria are met, the Node B shall initiate a Measurement Reporting procedure. The DEDICATED MEASUREMENT REPORT message shall use the communication control port assigned to the Node B communication context. Unless specified below, the meaning of the parameters are given in other specifications.

The *Dedicated Measurement Id* IE shall be set to the Dedicated Measurement Id provided by the CRNC when initiating the measurement with the Measurement Initiation procedure.

#### **8.3.9.3 Abnormal Conditions**

### **8.3.10 Dedicated Measurement Termination**

#### **8.3.10.1 General**

This procedure is used by the CRNC to terminate a measurement previously requested by the Measurement Initiation procedure.

### 8.3.10.2 Successful Operation



**Figure 29: Measurement Termination procedure: Successful Operation**

This procedure is initiated with a DEDICATED MEASUREMENT TERMINATION REQUEST message, sent from the CRNC to the Node B using the communication control port assigned to the Node B communication context.

Upon reception, the Node B shall terminate reporting of measurements corresponding to the Dedicated Measurement Id.

### 8.3.10.3 Abnormal Conditions

## 8.3.11 Dedicated Measurement Failure

### 8.3.11.1 General

This procedure is used by the Node B to notify the CRNC that a measurement previously requested by the Measurement Initiation procedure can no longer be reported. The NodeB is allowed to initiate the DEDICATED MEASUREMENT FAILURE INDICATION message at any time after having sent the RADIO LINK SETUP RESPONSE message, as long as the NodeB communication context exists.

### 8.3.11.2 Successful Operation



**Figure 30: Measurement Failure procedure: Successful Operation**

This procedure is initiated with a DEDICATED MEASUREMENT FAILURE INDICATION message, sent from the Node B to the CRNC using the communication control port assigned to the Node B communication context, to inform the CRNC that a previously requested measurement no longer can be reported.

### 8.3.11.3 Abnormal Conditions

## 8.3.12 Radio Link Failure

### 8.3.12.1 General

This procedure is used by Node B to indicate a failure in one or more radio links.

### 8.3.12.2 Successful Operation



**Figure 31: Radio Link Failure**

When Node B detects that one or more radio link is no longer available, it sends the RADIO LINK FAILURE INDICATION message to CRNC indicating the failed radio links with the most appropriate cause values in the *Cause* IE. Possible cause values may be:


When the Radio Link Failure procedure is used to notify the non-achievement or loss of UL synchronisation, the message is sent when the UL synchronisation of the radio link is not achieved at the RL setup, or RL Addition, or it is lost during the active connection.

### 8.3.13 Radio Link Restoration

#### 8.3.13.1 General

This procedure is used by the Node B to notify the re-achievement of uplink synchronisation.

#### 8.3.13.2 Successful Operation

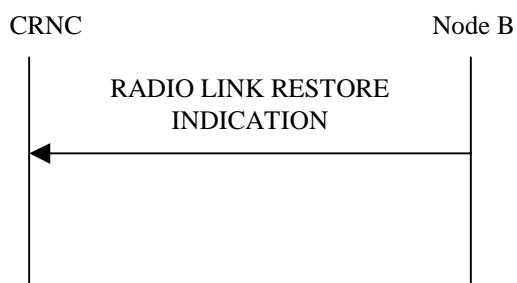

**Figure 32: Radio Link Restoration**

The Node B may initiate this procedure only if it has previously used the RL Failure procedure to notify the loss of uplink synchronisation. If the uplink synchronisation is re-established, the Node B shall send the RL RESTORE INDICATION message to the CRNC.


The Node B shall not send RADIO LINK RESTORE INDICATION message if Radio Link Deletion procedure has already been activated in the Node B after the RADIO LINK FAILURE INDICATION sent by the Node B.

### 8.3.14 Compressed Mode Preparation (for FDD only)

#### 8.3.14.1 General

The Compressed Mode Preparation procedure is used to prepare the compressed mode in the NodeB for one UE-UTRAN connection.

### 8.3.14.2 Successful Operation

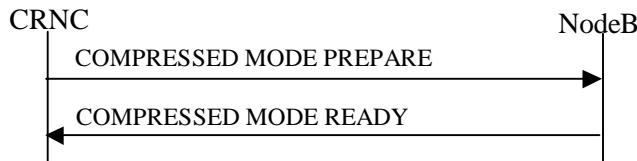


**Figure 33: Compressed Mode Preparation procedure, Successful Operation**

The Compressed Mode Preparation procedure is initiated by the CRNC by sending the COMPRESSED MODE PREPARE message to the NodeB.

If the proposed modifications are allowed by the NodeB and the NodeB has successfully initialised the required resources, the NodeB shall respond to the CRNC with COMPRESSED MODE READY message.

If the *Compressed Mode Method IE* is set to 'None', the NodeB shall terminate the compressed mode even if the COMPRESSED MODE PREPARE message was received before the end of the compressed mode period.

### 8.3.14.3 Unsuccessful Operation

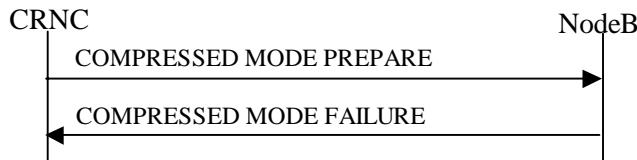

**Figure 34: Compressed Mode Preparation procedure, unsuccessful case**

If the requested reconfiguration fails for one or more RLs the NodeB shall abort the procedure and send the COMPRESSED MODE FAILURE message to the CRNC, indicating the reason for failure.

Typical cause values are:

#### Radio Network Layer Causes:

- Requested Configuration not Supported

#### Miscellaneous Causes:

- Not enough User Plane Processing Resources

### 8.3.14.4 Abnormal Conditions

## 8.3.15 Compressed Mode Commit (for FDD only)

### 8.3.15.1 General

The Compressed Mode Commit procedure is used to activate the compressed mode in the NodeB for one UE-UTRAN connection.

### 8.3.15.2 Successful Operation



**Figure 35: Compressed Mode Commit procedure, Successful Operation**

The NodeB shall initiate the compressed mode in accordance with the settings prepared by the Compressed Mode Preparation procedure at the CFN requested by the CRNC when receiving the COMPRESSED MODE COMMIT message from the CRNC.


### 8.3.15.3 Abnormal Conditions

## 8.3.16 Compressed Mode Cancellation (for FDD only)

### 8.3.16.1 General

The Compressed Mode Cancellation procedure is used to cancel the compressed mode in the NodeB for one UE-UTRAN connection.

### 8.3.16.2 Successful Operation

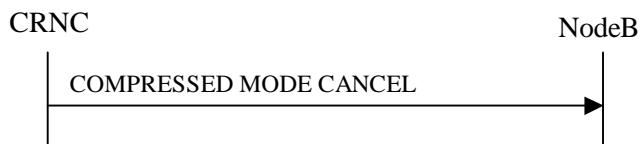

**Figure 36: Compressed Mode Cancellation procedure, Successful Operation**

The NodeB shall abort the compressed mode if it receives the COMPRESSED MODE CANCEL message.

### 8.3.16.3 Abnormal Conditions

## 8.4 Error Handling Procedures

### 8.4.1 Error Indication

This procedure is used by both NodeB and its CRNC to report detected errors or any other problems in one incoming message if they cannot be reported by any other procedure.

When NodeB or CRNC detect an erroneous message (or a message, which for some other reasons cannot be processed), it sends an ERROR INDICATION message with the most appropriate cause value.


The message contains as a transparent L3 information the erroneous message (coded), CRNC communication context ID (in UL), and NodeB communication context ID (in DL), if the NodeB is able to deduce it from the erroneous message.

Possible error cause can be:

- Unknown message ID: the message contains a message ID that is not known to the receiver

- Unknown Information element: the message contains an information element that is not known or cannot be interpreted by the receiver
- Procedural errors: the message is not compatible with the status of the receiver.
- Unknown failure reason: requested procedure failed to process by unknown reason

The message is sent using the Dedicated NBAP signalling connection of the incoming message, or using the Common NBAP if the incoming message was sent via Common NBAP.

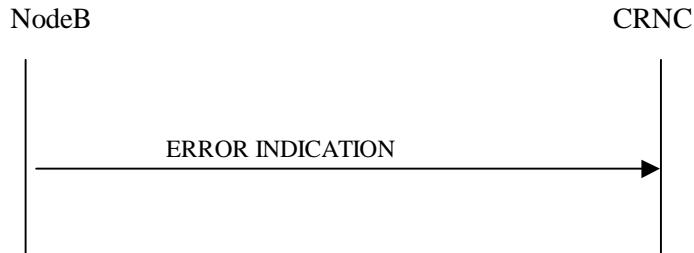

**Figure 37: Error Indication**

## 9 Elements for NBAP communication

### 9.1 Message functional definition and content

#### 9.1.1 Message Contents

An information element can be of the following *types*:

<b>M</b>	The information element is mandatory, i.e. always present in the message
<b>O</b>	The information element is optional, i.e. may or may not be present in the message independently on the presence or value of other information elements in the same message
<b>C</b>	The presence of the information element is conditional to the presence or to the value of another information element, as reported in the correspondent footnote

In case of an information element group, the group is preceded by a name for the info group (in bold). It is also indicated whether the group is mandatory, optional or conditional. Each group may be also repeated within one message. The presence field of the information elements inside one group defines if the information element is mandatory, optional or conditional if the group is present.

## 9.1.2 COMMON TRANSPORT CHANNEL SETUP REQUEST

### 9.1.2.1 FDD Message

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
Configuration Generation ID	M			
<b>CHOICE common physical channel to be configured</b>				
Secondary CCPCH				
<b>Secondary CCPCH</b>		1		
Common Physical Channel ID	M			
FDD S-CCPCH Offset	M			Corresponds to 25.211: s-CCPCH,k
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
TFCS	M			For the DL.
Secondary CCPCH Slot Format	M			
Pilot Bits Used Indicator	M			
Multiplexing Position	M			
STTD Indicator	M			
<b>FACH Parameters</b>	C-choiceCh	0..<maxnoofFACHs>		
Common transport channel ID	M			
Transport Format Set	M			For the DL.
ToAWS	M			
ToAWE	M			
Max FACH Power	M		DL Power	Maximum allowed power on the FACH.
<b>PCH Parameters</b>	C-choiceCh	0..1		
Common Transport Channel ID	M			
Transport Format Set	M			For the DL.
ToAWS	M			
ToAWE	M			
PCH Power	M		DL Power	
<b>PICH Parameters</b>		1		
Common Physical Channel ID	M			
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
PICH Power	M		DL Power	Power to be used on the PICH.
PICH Mode	M			Number of PI per frame
STTD Indicator	M			
<b>PRACH</b>				
<b>PRACH</b>		1		

Common Physical Channel ID	M			
Scrambling Code Word Number	M			
TFCS	M			For the UL.
Preamble Signatures	M			
Allowed Slot Format Information		1..<maxSF>		
RACH Slot Format	M			
RACH Sub Channel Numbers	M			
Puncture Limit	M			For the UL
<b>RACH Parameters</b>		1		
Common Transport Channel ID	M			
Transport Format Set	M			For the UL.
<b>AICH Parameters</b>		1		
Common Physical Channel ID	M			
DL Scrambling Code	M			
AICH Transmission Timing	M			
FDD DL Channelisation Code Number	M			
AICH Power	M		DL Power	
STTD Indicator	M			

Condition	Explanation
ChoiceCh	One of the channels FACH or PCH or both must be present.

Range bound	Explanation
MaxnoofFACHs	Maximum number of FACHs that can be defined on a Secondary CCPCH.
MaxSF	Maximum number of SF for a PRACH

### 9.1.2.2 TDD Message

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
Configuration Generation ID	M			
CHOICE common physical channels to be configured				
Secondary CCPCHs				
CCTrCH ID	M			For DL CCTrCH supporting one or several Secondary CCPCHs
TFCS	M			For DL CCTrCH supporting one or several Secondary CCPCHs

<b>Secondary CCPCH</b>		1..<maxnoofS-CCPCHs>		
Common physical channel ID	M			
TDD Channelisation Code	M			
Time Slot	M			
Burst Type	M			Long or short midamble
Midamble shift	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
S-CCPCH Power	M		DL Power	
STTD Indicator	M			
<i>PRACH</i>				
<b>PRACH</b>	M			
Common physical channel ID	M			
Time Slot	M			
TDD Channelisation Code	M			
Max PRACH Midamble Shifts	O			
PRACH Midamble	M			
<i>CHOICE common transport channels to be configured</i>				
<i>FACH</i>				
<b>FACH</b>	C ChoiceCh	1..<maxnoofFA CHs>		
Common transport channel ID	M			
Transport Format Set	M			For the DL.
ToAWS	M			
ToAWE	M			
<i>PCH</i>				
<b>PCH</b>	C ChoiceCh	1..<maxnoofPC Hs>		
Common transport channel ID	M			
Transport Format Set	M			For the DL.
ToAWS	M			
ToAWE	M			
<b>PICH Parameters</b>		1		
Common Physical Channel ID	M			
TDD Channelisation Code	M			
Time Slot	M			
Burst type	O			
Midamble shift	M			
TDD Physical Channel Offset	M			
Repetition period	M			
Repetition length	M			
Paging Indicator Length	M			
PICH Power	M			
<i>RACH</i>		1		
<b>RACH</b>				

Common transport channel ID	M			
-----------------------------	---	--	--	--

Condition	Explanation
<i>ChoiceCh</i>	One of the channels FACH or PCH or both must be present.

Range bound	Explanation
<i>MaxnoofS-CCPCHs</i>	Maximum number of Secondary CCPCHs per CCTrCH.
<i>MaxnoofCCTrCHs</i>	Maximum number of CCTrCHs that can be defined in a cell.
<i>MaxnoofFACHs</i>	Maximum number of FACHs that can be defined on a Secondary CCPCH.
<i>MaxnoofPCHs</i>	Maximum number of PCHs that can be defined on a Secondary CCPCH.

### 9.1.3 COMMON TRANSPORT CHANNEL SETUP RESPONSE

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
CHOICE common transport channel configured				
<i>FACH</i>				
<b>FACH Parameters</b>	C-choiceCh	0..<maxnoofFA CHs>		
Common Transport Channel ID	M			
Binding ID	M			
Transport layer address	M			
<i>PCH</i>				
<b>PCH Parameters</b>	C-choiceCh	0..1		
Common transport channel ID	M			
Binding ID	M			
Transport layer address	M			
<i>RACH</i>				
<b>RACH parameters</b>		1		
Common transport channel ID	M			
Binding ID	M			
Transport layer address	M			
Criticality Diagnostics	O			

Condition	Explanation
<i>ChoiceCh</i>	One of the channels FACH or PCH or both must be present.

Range bound	Explanation
<i>MaxnoofFACHs</i>	Maximum number of FACHs that can be defined on a Secondary CCPCH[FDD] / a group of Secondary CCPCHs [TDD].

### 9.1.4 COMMON TRANSPORT CHANNEL SETUP FAILURE

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality diagnostics	O			

## 9.1.5 COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST

### 9.1.5.1 FDD Message

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
Configuration Generation ID	M			
<b>FACH parameters</b>		0..<maxFACHCell>		
Common Transport Channel ID	M			
Max FACH Power	O		DL Power	Maximum allowed power on the FACH.
ToAWS	O			
ToAWE	O			
<b>PCH Parameters</b>		0..1		
Common Transport Channel ID	M			
PCH Power	O		DL Power	Power to be used on the PCH.
ToAWS	O			
ToAWE	O			
<b>PICH Parameters</b>		0..1		
Common Physical Channel ID	M			
PICH Power	M		DL Power	Power to be used on the PICH.
<b>PRACH Parameters</b>		0..<maxnoofPRACHs>		
Common Physical Channel ID	M			
Preamble Signatures	M			
Allowed Slot Format Information		0..<maxSF>		
Slot Format	M			
RACH Sub Channel Numbers	O			
<b>AICH Parameters</b>		0..<maxnoofPRACHs>		
Common Physical Channel ID	M			
AICH Power	M		DL Power	Power to be used on the AICH.

Range bound	Explanation
MaxFACHCell	Maximum number of FACHs that can be defined in a Cell
maxnoofPRACHs	Maximum number of PRACHs and AICHe that can be defined in a Cell
maxSF	Maximum number of SF for a PRACH

### 9.1.5.2 TDD Message

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			

Message Type	M			
Transaction ID	M			
C-ID	M			
Configuration Generation ID	M			
CHOICE common physical channels to be reconfigured				
<i>Secondary CCPCHs</i>				
CCTrCH ID	M			For DL CCTrCH supporting one or several Secondary CCPCHs
<b>Secondary CCPCH</b>		O..<Maxnoo fSCCPC Hs>		
Common physical channel ID	M			
S-CCPCH Power	M			DL power
<i>PICH</i>				
<b>PICH Parameters</b>		0 .. 1		
Common physical channel ID	M			
PICH Power	M			
CHOICE common transport channels to be reconfigured				
<i>FACH</i>				
<b>FACH parameters</b>		O..<Maxn oofFACH s>/		
Common Transport Channel ID	M			
ToAWS	O			
ToAWE	O			
<i>PCH</i>				
<b>PCH parameters</b>		0 .. <Maxnoo fPCHs>		
Common Transport Channel ID	M			
ToAWS	O			
ToAWE	O			

Range bound	Explanation
<i>MaxFACHCell</i>	Maximum number of FACHs that can be repeated in a Cell
<i>MaxnoofPCHs</i>	Maximum number of PCHs that can be defined in a cell.

### 9.1.6 COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Criticality diagnostics	O			

### 9.1.7 COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality diagnostics	O			

### 9.1.8 COMMON TRANSPORT CHANNEL DELETION REQUEST

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
Common Physical Channel ID	M			Indicates the Common Physical Channel for which the Common Transport Channels (together with the Common Physical Channel) shall be deleted.
Configuration Generation ID	M			

### 9.1.9 COMMON TRANSPORT CHANNEL DELETION RESPONSE

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Criticality diagnostics	O			

### 9.1.10 BLOCK RESOURCE REQUEST

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
Blocking Priority Indicator	M			
<b>Shutdown Timer</b>	C- BlockNormal			

Condition	Explanation
BlockNormal	The information element is present when the Blocking Priority Indicator IE indicates 'Normal Priority'.

### 9.1.11 BLOCK RESOURCE RESPONSE

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Criticality diagnostics	O			

### 9.1.12 BLOCK RESOURCE FAILURE

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality diagnostics	O			

### 9.1.13 UNBLOCK RESOURCE INDICATION

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			

### 9.1.14 AUDIT REQUIRED INDICATION

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			

### 9.1.15 AUDIT REQUEST

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Cell parameters		0.. <maxCellinNo deB>		
C-ID	M			
Configuration Generation Id	M			

Range bound	Explanation
MaxCellinNodeB	Maximum number of cell that can be configured in Node B

### 9.1.16 AUDIT RESPONSE

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
<b>Cell Information</b>		0.. <maxUCIDinN odeB>		
C-ID	M			
Resource Operational State	M			
Availability Status	M			
Maximum DL Power Capability	FFS			
Minimum Spreading Factor	FFS			
<b>Primary SCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary SCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Primary CPICH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary CPICH Information</b>		0..<maxSCPIC HCell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Primary CCPCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>BCH Information</b>		0..1		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary CCPCH Information</b>		0..<maxSCCP CHCell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PCH Information</b>		0..<maxPCHC		

		<i>ell &gt;</i>		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PICH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>FACH Information</b>		0..<maxFACH Cell>		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PRACH Information</b>		0..<maxPRAC HCell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>RACH Information</b>		0..<maxRACH Cell>		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>AICH Information</b>		0..<maxRACH Cell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>SCH Information</b>		0..1		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PSCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Communication Control Port Information</b>		0..<maxCCPinNo deB>		
Communication Control Port ID	M			
Resource Operational State	M			

Availability Status	M			
<b>Local Cell Information</b>		0.. <maxLocalCell inNodeB>		
Local Cell ID	M			
Number of Channel Elements	O			
Maximum DL Power Capability	O			
Criticality diagnostics	O			

Range bound	Explanation
maxCellInNodeB	Maximum number of Cell that can be configured in Node B
maxCCPInNodeB	Maximum number of communication control ports that can exist in the Node B
maxLocalCellInNodeB	Maximum number of Local Cells that can exist in the Node B
maxSCPICHCell	Maximum number of Secondary CPICH that can be defined in a Cell.
maxSCCPCHCell	Maximum number of Secondary CCPCH that can be defined in a Cell.
maxFACHCell	Maximum number of FACHes that can be defined in a Cell
maxRACHCell	Maximum number of RACHes that can be defined in a Cell
maxPCHCell	Maximum number of PCHes that can be defined in a Cell
maxPICHCell	Maximum number of PICHes that can be defined in a Cell

### 9.1.17 COMMON MEASUREMENT INITIATION REQUEST

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Common Measurement Object Type	M			
CHOICE Common Measurement Object Type				
"Cell"				
C-ID	M			
Time Slot	O			TDD only
"RACH"				
C-ID	M			
Common transport channel ID	M			
Common Measurement Type	M			
Measurement Characteristics	M			
Report Characteristics	M			

### 9.1.18 COMMON MEASUREMENT INITIATION RESPONSE

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Transaction Id	M			
Measurement Id	M			
CHOICE Common Measurement Object Type				
"Cell"				
Common Measurement value	M			
"RACH"				
Common Measurement Value	M			
SFN	O			Common Measurement Time Reference
Criticality Diagnostics	O			

### 9.1.19 COMMON MEASUREMENT INITIATION FAILURE

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			
Criticality diagnostics	O			

### 9.1.20 COMMON MEASUREMENT REPORT

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Transaction Id	M			
Measurement Id	M			
CHOICE Common Measurement Object Type				
"Cell"				
Common Measurement value	M			
"RACH"				
Common Measurement Value	M			
SFN	O			Common Measurement Time Reference

### 9.1.21 COMMON MEASUREMENT TERMINATION REQUEST

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Transaction Id	M			
Measurement Id	M			

### 9.1.22 COMMON MEASUREMENT FAILURE INDICATION

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			

### 9.1.23 CELL SETUP REQUEST

#### 9.1.23.1 FDD Message

Information Element	Presence	Range	IE type and Reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Local Cell Id	M			
C-Id	M			
Configuration Generation Id	M			
T Cell	M			
UARFCN	M			Indicates UL/DL Frequency
Maximum transmission power	M			
Primary scrambling code	M			
<b>Primary SCH Information</b>		1		
Common Physical Channel ID	M			
Primary SCH Power	M		DL Power	
TSTD Indicator	M			
<b>Secondary SCH Information</b>		1		
Common Physical Channel ID	M			
Secondary SCH power	M		DL Power	
TSTD Indicator	M			
<b>Primary CPICH Information</b>		1		
Common Physical Channel ID	M			
P-CPICH power	M			
Transmit Diversity Indicator	M			
<b>Secondary CPICH Information</b>		0..1		
Common Physical Channel ID	M			
DL Scrambling code	M			
FDD DL Channelisation Code Number	M			
S-CPICH Power	M		DL Power	
Transmit Diversity Indicator	M			
<b>Primary CCPCH Information</b>		1		
Common Physical Channel ID	M			
<b>BCH Information</b>		1		
Common Transport Channel ID	M			
BCH Power	M		DL Power	
STTD Indicator	M			

### 9.1.23.2 TDD Message

Information Element	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Local Cell Id	M			
C-Id	M			
Configuration Generation Id	M			
UARFCN	M			
Cell Parameter ID	M			
Maximum Transmission Power	O			
Transmission Diversity Applied	M			On DCHs
Sync Case	M			
<b>PSCH Information</b>		1		
Common physical channel ID	M			
CHOICE Sync Case				
Case 1				The same TS is used for PCCPCH
Time Slot	M			
Case 2 and Case 3				In Case 2 the same TS is used for PCCPCH
PSCH Time Slot	M			
PSCH Power	M			DL Power
TSTD Indicator	M			
<b>PCCPCH Information</b>		1		
Common physical channel ID	M			
CHOICE Sync Case				
Case 3				
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
PCCPCH Power	M			
STTD Indicator	M			
<b>Time Slot Configuration</b>		1 .. 15		
Time Slot	M			
Time Slot Status	M			
Time Slot Direction	M			

Condition	Explanation
Case 3	This IE is only present if the PSCH&PCCPCH Allocation is equal to 3

### 9.1.24 CELL SETUP RESPONSE

Information Element	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Criticality diagnostics	O			

### 9.1.25 CELL SETUP FAILURE

Information Element	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality diagnostics	O			

### 9.1.26 CELL RECONFIGURATION REQUEST

#### 9.1.26.1 FDD Message

Information Element	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
Configuration Generation Id	M			
Maximum transmission power	O			
<b>Primary SCH Information</b>		0,1		
Common Physical Channel ID	M			
Primary SCH power	M		DL Power	
<b>Secondary SCH Information</b>		0,1		
Common Physical Channel ID	M			
Secondary SCH power	M		DL Power	
<b>Primary CPICH Information</b>		0,1		
Common Physical Channel ID	M			
Primary CPICH power	M			
<b>Secondary CPICH Information</b>		0,1		
Common Physical Channel ID	M			
Secondary CPICH Power	M		DL Power	
<b>Primary CCPCH Information</b>		0,1		
<b>BCH Information</b>		1		
Common Transport Channel ID	M			
BCH Power	M		DL Power	

#### 9.1.26.2 TDD Message

Information Element	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
C-Id	M			
Configuration Generation ID	M			
<b>PSCH Information</b>		0,1		
Common Physical Channel ID	M			
PSCH Power	M			
<b>PCCPCH Information</b>		0,1		
Common Physical Channel ID	M			
PCCPCH Power	M			
Maximum Transmission Power	O			

<b>Time Slot Configuration</b>		0..15		
Time Slot	M			
Time Slot Status	M			
Time Slot Direction	M			

### 9.1.27 CELL RECONFIGURATION RESPONSE

Information Element	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Criticality diagnostics	O			

### 9.1.28 CELL RECONFIGURATION FAILURE

Information Element	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality diagnostics	O			

### 9.1.29 CELL DELETION REQUEST

Information Element	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			

### 9.1.30 CELL DELETION RESPONSE

Information Element	Presence	Range	IE type and reference	Semantics description
Message discriminator	M			
Message Type	M			
Transaction ID	M			
Criticality diagnostics	O			

### 9.1.31 RESOURCE STATUS INDICATION

Information Element	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Indication Type	M			
CHOICE Indication Type				
"No Failure"				
<b>Local Cell Information</b>		1.. <max LocalCellinNodeB>		
Local Cell ID	M			
Add/Delete Indicator	M			
Number of Channel Elements	M			
Maximum DL Power Capability	M			
"Service Impacting"				
<b>Local Cell Information</b>		0.. <maxLocalCellinNodeB>		
Local Cell ID	M			
Number of Channel Elements	O			
Maximum DL Power Capability	O			
<b>Communication Control Port Information</b>		0.. <maxCCPinNodeB>		
Communication Control Port ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Cell Information</b>		0.. <maxCellinNodeB>		
C-ID	M			
Resource Operational State	M			
Availability Status	M			
Maximum DL Power Capability	FFS			
Minimum Spreading Factor	FFS			
<b>Primary SCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary SCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational	M			

<b>State</b>				
Availability Status	M			
<b>Primary CPICH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary CPICH Information</b>		0..<maxSCPIC HCell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Primary CCPCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>BCH Information</b>		0.. 1		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>Secondary CCPCH Information</b>		0..<maxSCCP CHCell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PCH Information</b>		0..<maxPCHC ell>		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PICH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>FACH Information</b>		0.. <maxFACHCe ll>		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PRACH Information</b>		0..<maxPRAC HCell>		

Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>RACH Information</b>		0.. <maxPRACH Cell>		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>AICH Information</b>		0.. <maxPRACH Cell>		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>SCH Information</b>		0..1		
Common Transport Channel ID	M			
Resource Operational State	M			
Availability Status	M			
<b>PSCH Information</b>		0..1		
Common Physical Channel ID	M			
Resource Operational State	M			
Availability Status	M			
Cause	O			

Range bound	Explanation
<i>maxLocalCellinNodeB</i>	Maximum number of Local Cells that can exist in the Node B
<i>maxCellinNodeB</i>	Maximum number of C ID that can be configured in Node B
<i>maxSCPICHCell</i>	Maximum number of Secondary CPICH that can be defined in a Cell.
<i>maxSCCPCHCell</i>	Maximum number of Secondary CCPCH that can be defined in a Cell.
<i>maxFACHCell</i>	Maximum number of FACHes that can be defined in a Cell
<i>maxPCHCell</i>	Maximum number of PCHes that can be defined in a Cell
<i>maxPRACHCell</i>	Maximum number of PRACHes and AICHes that can be defined in a Cell
<i>maxCCPinNodeB</i>	Maximum number of communication control ports that can exist in the Node B

### 9.1.32 SYSTEM INFORMATION UPDATE REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
C-ID	M			
BCCH Modification Time	O			
<b>MIB/SIBInformation</b>		1.. maxIB		
IB Type	M			
SIB Deletion Indicator	C-NotMIB			
<i>CHOICE DeletionIndicator</i>				
<i>NoDeletion</i>				
SIB Originator	C-NotMIB			
<b>Segment Information</b>		1.. maxIBSEG		
Segment Type	M			
IB SG REP	M			
IB SG POS	M			
IB SG	C – CRNCOri nation			

Range bound	Explanation
1..maxIB	Maximum number of information Blocks supported in a physical channel scheduling cycle
1..maxIBSEG	Maximum number of segments for one Information Block

Condition	Explanation
CRNCOri nation	The IE shall be present if the SIB Originator IE is set to 'CRNC'
NotMIB	This IE shall be present if the IB Type is not equal to "MIB"

### 9.1.33 SYSTEM INFORMATION UPDATE RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Criticality diagnostics	O			

### 9.1.34 SYSTEM INFORMATION UPDATE FAILURE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
Cause	M			
Criticality diagnostics	O			

## 9.1.35 RADIO LINK SETUP REQUEST

### 9.1.35.1 FDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>UL DPCH Information</b>		1		
UL Scrambling Code	M			
Min UL Channelisation Code length	M			
Max Number of UL DPDCHs	C – CodeLen			
puncture limit	M			For UL
Transport Format Combination Set	M			for UL
UL DPCCH Slot Format	M			
UL Eb/No Target	M		Uplink Eb/No	
Diversity mode	M			
D Field Length	C – FB			
SSDT cell ID Length	O			
S Field Length	O			
<b>DL DPCH Information</b>				
Transport Format Combination Set	M			For DL
DL DPCH Slot Format	M			
TFCI signalling mode	M			
TFCI presence	C-SlotFormat			
Multiplexing Position	M			
<b>Power Offset Information</b>		1		
PO1	M		Power Offset	Power offset for the TFCI bits
PO2	M		Power Offset	Power offset for the TPC bits
PO3	M		Power Offset	Power offset for the pilot bits
Delta TPC	M			
<b>DCH Information</b>		1 to <maxnoofDCHs>		
DCH ID	M			
DCH Combination Ind	O			
RLC mode	M			
Transport Format Set	M			For UL
Transport Format Set	M			For DL
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
RL ID	O			RL Supporting the DSCH
DSCH TFCS	O			
<b>DSCH Information</b>		0 to		

		<maxnoofDSCHs>		
DSCH ID	M			
Transport Format Set	M			For DSCH
Frame handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>RL Information</b>		1 to <maxnoofRLs>		
RL ID	M			
C-ID	M			
Frame Offset	M			
Chip Offset	M			
Propagation Delay	O			
Diversity Control Field	C – NotFirstRL			
<b>DL Code Information</b>		1 to <maxnoof- DLCodes		
DL Scrambling Code	M			
FDD DL Channelisation Code Number	M			
Initial DL transmission Power	M		DL Power	
Maximum DL power	M		DL Power	
Minimum DL power	M		DL Power	
SSDT Cell Identity	O			

<b>Condition</b>	<b>Explanation</b>
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4
FB	This IE is present only if Feed Back mode diversity is activated.
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information.
SlotFormat	This IE is only present if the DL DPCH slot format is equal to any of the value 12 to 16.

<b>Range bound</b>	<b>Explanation</b>
MaxnoofDSCHs	Maximum no. of DSCHs for one UE.
MaxnoofDCHs	Maximum no. of DCHs for one UE.
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDLCodes	Maximum no. of DL code information.

## 9.1.35.2 TDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>UL CCTrCH Information</b>		0 to <maxno CCTrCH>		
CCTrCH ID	M			
Transport Format Combination Set	M			
TFCI Coding	M			
Puncture Limit	M			
<b>UL DPCH Information</b>		0 to <maxnoOfDPCH>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
<b>DL CCTrCH Information</b>		0 to <maxno CCTrCH>		
CCTrCH ID	M			
Transport Format Combination Set	M			
TFCI Coding	M			
Puncture Limit	M			
<b>DL DPCH information</b>		0 to <maxnoOfDPCH>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
<b>DCH Information</b>		1 to <maxnoofDCHs>		
DCH ID	M			
RLC mode	M			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			
Transport Format Set	M			For UL
Transport Format Set	M			For DL
Frame Handling Priority	O			

Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
<b>DSCH Information</b>		0 to <MaxnoofDSCHs >		
DSCH ID	M			
CCTrCH ID	M			DL CCTrCH in which the DSCH is mapped
Transport Format Set	M			For DSCH
Frame handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>USCH Information</b>		0 to <MaxnoofUSCHs >		
USCH ID	M			
CCTrCH ID	M			UL CCTrCH in which the USCH is mapped
Transport Format Set	M			For USCH
<b>RL Information</b>		1		
RL ID	M			
C-ID	M			
Frame TDD Physical Channel Offset	M			
Initial DL transmission Power	M		DL Power	
Maximum DL power	M		DL Power	
Minimum DL power	M		DL Power	

Range bound	Explanation
MaxnoofDCHs	Maximum no. of DCHs for one UE.
maxnoOfDPCH	Maximum number of DPCH in one CCTrCH
maxnoCCTrCH	no. of CCTrCH for one UE.
MaxnoofDSCHs	Maximum number of DSCH for one UE
MaxnoofUSCHs	Maximum number of USCH for one UE

## 9.1.36 RADIO LINK SETUP RESPONSE

### 9.1.36.1 FDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
Node B Communication Context ID	M			
Communication Control Port ID	M			
<b>RL Information Response</b>		1 to <maxnoofRLs>		
RL ID	M			
UL interference level	M			
Diversity Indication	C-NotFirstRL			
<i>CHOICE diversity Indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				
<b>DCH Information Response</b>		0 to <maxnoofDCHs>		Only one DCH per set of coordinated DCH shall be included
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH Information Response</b>		0 to <Numof DSCH>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Criticality diagnostics	O			

Condition	Explanation
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of DCH per UE.
MaxnoofDSCHs	Maximum no. of DSCHs for one UE.

### 9.1.36.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
Node B Communication Context ID	M			
Communication Control Port ID	M			
<b>RL Information Response</b>		1		
RL ID	M			
UL interference level	M			
<b>DCH Information Response</b>		1 to <maxnoofDCH>		Only one DCH per set of coordinated DCH shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH Information Response</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>USCH Information Response</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Criticality diagnostics	O			

Range bound	Explanation
MaxnoofDCHs	Maximum no. of DCH per UE.
MaxnoofDSCHs	Maximum number of DSCHs for one UE
MaxnoofUSCHs	Maximum number of USCHs for one UE

## 9.1.37 RADIO LINK SETUP FAILURE

### 9.1.37.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
Node B Communication Context ID	M			
Communication Control Port ID	O			
<b>Unsuccessful RL Information Response</b>		1 to <maxnoofRLs>		
RL ID	M			
Cause	M			
<b>Successful RL Information Response</b>		0 to <maxnoofRLs-1>		
RL ID	M			
UL interference level	M			
Diversity Indication	C-NotFirstRL			
CHOICE diversity Indication				
<i>Combining</i>				
RL ID	M			Reference RL ID for the combining
<i>Non Combining or IE not present</i>				
<b>DCH Information Response</b>		0 to <maxnoofDCHs>		Only one DCH per set of coordinated DCH shall be included
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH Information Response</b>		0 to <Numof DSCH>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT Support Indicator	M			
Criticality diagnostics	O			

Condition	Explanation
Success	This IE is present if at least one of the radio links has been successfully set up.
NotFirstRL	This IE is present only if the RL is not the first one in the RL Information.

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.
MaxnoofDCHs	Maximum no. of set DCH per UE.
MaxnoofDSCHs	Maximum number of DSCH for one UE

### 9.1.37.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>Unsuccessful RL Information Response</b>		1		
RL ID	M			
Cause	M			
Criticality diagnostics	O			

### 9.1.38 RADIO LINK ADDITION REQUEST

#### 9.1.38.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>RL Information</b>		1..<maxn oofRL-1>		
RL ID	M			
C-Id	M			
Frame Offset	M			
Chip Offset	M			
Diversity Control Field	M			
<b>DL Code Information</b>		1..maxno ofDLCod es		
DL Scrambling code	M			
FDD DL channelisation code number	M			
Initial DL transmission power	O		DL Power	
Maximum DL power	O		DL Power	
Minimum DL power	O		DL Power	
SSDT Cell Identity	O			

Range bound	Explanation
MaxnoofRL	Maximum number of RLs for one UE
MaxnoofDLCodes	Maximum number of DL code information

### 9.1.38.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>UL CCTrCH Information</b>		0 to <maxno CCTrCH>		
CCTrCH ID	M			
<b>UL DPCH Information</b>		0 to <maxnoOfDPCH>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
<b>DL CCTrCH Information</b>		0 to <maxno CCTrCH>		
CCTrCH ID	M			
<b>DL DPCH information</b>		0 to <maxnoOfDPCH>		
DPCH ID	M			
TDD Channelisation Code	M			
Burst Type	M			
Midamble Shift	M			
Time Slot	M			
TDD Physical Channel Offset	M			
Repetition Period	M			
Repetition Length	M			
TFCI Presence	M			
<b>RL Information</b>		1		
RL ID	M			
C-Id	M			
Frame Offset	M			
Diversity Control Field	M			
Initial DL Power	O		DL Power	
Maximum DL power	O		DL Power	
Minimum DL power	O		DL Power	

Range bound	Explanation
MaxnoOfDPCH	Maximum number of DPCH in one CCTrCH
MaxnoCCTrCH	no. of CCTrCH for one UE.

## 9.1.39 RADIO LINK ADDITION RESPONSE

### 9.1.39.1 FDD message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>RL Information Response</b>		1..<maxnoo fRL-1>		
RL ID	M			
UL interference level	M			
Diversity Indication	M			
<i>CHOICE diversity indication</i>				
<i>Combining</i>				
RL ID	M			Reference RL
<i>Non combining</i>				
<b>DCH Information Response</b>		1..<maxnoo fDCHs>		
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT support indicator	M			
Criticality diagnostics	O			

Range bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs per UE
<i>MaxnoofRL</i>	Maximum number of RLs for one UE

## 9.1.39.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>RL Information response</b>		1		
RL ID	M			
UL interference level	M			
Diversity Indication	M			
CHOICE diversity indication				
Combining				In TDD it indicates whether the old Transport Bearer shall be reused or not
RL ID	M			Reference RL
Non combining				
<b>DCH Information Response</b>		0..<maxnoofDCHs>		
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH Information Response</b>		0 ..<MaxnoofDSCHs>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>USCH Information Response</b>		0 ..<MaxnoofUSCHs>		
USCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Criticality diagnostics	O			

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs per UE
MaxnoofDSCHs	Maximum number of DSCHs for one UE
MaxnoofUDCHs	Maximum number of USCHs for one UE

## 9.1.40 RADIO LINK ADDITION FAILURE

### 9.1.40.1 FDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>Unsuccessful RL Information Response</b>		1..<maxnoo fRL-1>		
RL ID	M			
Cause	M			
<b>Successful RL Information Response</b>		1..<maxnoo fRL-2>		
RL ID	M			
UL interference level	M			
Diversity Indication	M			
CHOICE diversity indication				
Combining				
RL ID	M			Reference RL
Non combining				
<b>DCH Information Response</b>		1..<maxnoo fDCHs>		
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
SSDT support indicator	M			
Criticality diagnostics	O			

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs per UE
MaxnoofRL	Maximum number of RLs for one UE

### 9.1.40.2 TDD Message

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>Unsuccessful RL Information Response</b>		1		
RL ID	M			
Cause	M			
Criticality diagnostics	O			

## 9.1.41 RADIO LINK RECONFIGURATION PREPARE

### 9.1.41.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>UL DPCH Information</b>		0..1		
UL Scrambling code	O			
Min UL Channelistion Code Length	O			
Max Number of UL DPDCHs	C – CodeLen			
Puncture Limit	O			For UL
TFCS	O			
UL DPCCH Slot Format	O			
SSDT Cell Identity Length	O			
S-Field Length	O			
<b>DL DPCH Information</b>		0..1		
TFCS	O			
DL DPCH Slot Format	O			
TFCI Signalling Mode	O			
TFCI presence	C-Slot Format			
DTX Insertion Point	O			
<b>DCHs to Modify</b>		0..<maxnoof DCHs>		
DCH ID	M			
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
<b>DCHs to Add</b>		0..<maxnoof DCHs>		
DCH ID	M			
DCH Combination Ind	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
<b>DCHs to Delete</b>		0..<maxnoof DCHs>		
DCH ID	M			
<b>DSCH to modify</b>		0..1		
Transport Format Set	O			For the DL.
RL ID	O			
Frame Handling Priority	O			

ToAWS	O			
ToAWE	O			
<b>DSCH to add</b>		0..1		
Transport Format Set	M			For the DL.
RL ID	M			
Frame Handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>DSCH to Delete</b>		0..1		
RL ID	M			
<b>RL Information</b>		0..<maxnoof RLS>		
RL ID	M			
<b>DL Code Information</b>		0..<maxnoof DLCodes>		
DL Scrambling Code	O			
FDD DL Channelisation Code Number	O			
Maximum DL Power	O		DL Power	
Minimum DL Power	O		DL Power	
SSDT Indication	O			
SSDT Cell Identity	C - SSDTIndON			

Condition	Explanation
SSDTIndON	The IE may be present if the SSDT Indication is set to 'SSDT Active in the UE'.
CodeLen	This IE is present only if "Min UL Channelisation Code length" equals to 4.
SlotFormat	This IE is only present if the DL DPCH slot format is equal to any of the value 12 to 16.

Range Bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofRLs	Maximum number of RLs for a UE.
MaxnoofDLCodes	Maximum number of Downlink Channelisation Codes.

### 9.1.41.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>UL CCTrCH Information</b>		0.. <maxnoof CCTrCHs>		
CCTrCH ID	M			
TFCS	O			
TFCI Coding	O			
Puncture Limit	O			
<b>UL DPCH Information</b>		0.. <maxnoof DPCHs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physical channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			
<b>DL CCTrCH Information</b>		0.. <maxnoof CCTrCHs>		
CCTrCH ID	M			
TFCS	O			
TFCI Coding	O			
PunctureLimit				
<b>DL DPCH Information</b>		0.. <maxnoof DPCHs>		
DPCH ID	M			
TDD Channelisation Code	O			
Burst Type	O			
Midamble Shift	O			
Time Slot	O			
TDD Physical Channel Offset	O			
Repetition Period	O			
Repetition Length	O			
TFCI Presence	O			
<b>DCHs to Modify</b>		0..<maxnoof DCHs>		
DCH ID	M			
CCTrCH ID	O			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	O			DL CCTrCH in which the DCH is mapped
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Frame Handling Priority	O			
UL FP Mode	O			

ToAWS	O			
ToAWE	O			
<b>DCHs to Add</b>		0..<maxnoof DCHs>		
DCH ID	M			
RLC Mode	M			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
<b>DCHs to Delete</b>		0..<maxnoof DCHs>		
DCH ID	M			
<b>DSCH Information to modify</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
CCTrCH ID	O			DL CCTrCH in which the DSCH is mapped
Transport Format Set	O			
Frame handling Priority	O			
ToAWS	O			
ToAWE	O			
<b>DSCH Information to add</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
CCTrCH ID	M			DL CCTrCH in which the DSCH is mapped
Transport Format Set	M			
Frame handling Priority	O			
ToAWS	M			
ToAWE	M			
<b>DSCH Information to delete</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
<b>USCH Information to modify</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
Transport Format Set	O			
CCTrCH ID	O			UL CCTrCH in which the USCH is mapped
<b>USCH Information to add</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
CCTrCH ID	M			UL CCTrCH in which the USCH is mapped
Transport Format Set	M			
<b>USCH Information to delete</b>		0 ..		

		<Maxnoof USCHs>		
USCH ID	M			
<b>RL Information</b>		0..1		
RL ID	M			
Maximum Downlink Power	O		DL Power	
Minimum Downlink Power	O		DL Power	

Range Bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs for a UE.
<i>MaxnoofCCTrCHs</i>	Maximum number of CCTrCHs for a UE.
<i>MaxnoofDPCHs</i>	Maximum number of DPCHs in one CCTrCH.
<i>MaxnoofDSCHs</i>	Maximum number of DSCHs for one UE
<i>MaxnoofUSCHs</i>	Maximum number of USCHs for one UE

### 9.1.42 RADIO LINK RECONFIGURATION READY

IE/Group name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>RL Information Response</b>		<i>0..&lt;maxnoof RLs&gt;</i>		Only one RL information response group for one group of combined RLs shall be present
RL ID	M			
<b>DCH to be Added</b>		<i>0..&lt;maxnoof DCHs&gt;</i>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DCH to be Modified</b>		<i>0..&lt;maxnoof DCHs&gt;</i>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH to be Setup</b>		<i>0..&lt;Maxnoof DSCHs&gt;</i>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH to be Modified</b>		<i>0..&lt;Maxnoof DSCHs&gt;</i>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>USCH to be setup</b>		<i>0 .. &lt;Maxnoof USCHs&gt;</i>		
USCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>USCH to be modified</b>		<i>0 .. &lt;Maxnoof USCHs&gt;</i>		
USCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Criticality diagnostics	O			

Range Bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs for a UE.
<i>MaxnoofRLs</i>	Maximum number of RLs for a UE.
<i>MaxnoofDSCHs</i>	Maximum number of DSCHs for one UE
<i>MaxnoofUSCHs</i>	Maximum number of USCHs for one UE

### 9.1.43 RADIO LINK RECONFIGURATION FAILURE

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
Cause	M			
<b>RLs Causing Reconfiguration Failure</b>		0..<maxnoof RLS>		
RL ID	M			
Cause	M			
Criticality diagnostics	O			

Range Bound	Explanation
<i>MaxnoofRLs</i>	Maximum number of RLs for a UE.

### 9.1.44 RADIO LINK RECONFIGURATION COMMIT

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message type	M			
Node B Communication Context ID	M			
Transaction ID	M			
CFN	M			

### 9.1.45 RADIO LINK RECONFIGURATION CANCEL

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message type	M			
Node B Communication Context ID	M			
Transaction ID	M			

## 9.1.46 RADIO LINK RECONFIGURATION REQUEST

### 9.1.46.1 FDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>UL DPCH Information</b>		0..1		
TFCS	O			For the UL.
<b>DL DPCH Information</b>		0..1		
TFCS	O			For the DL.
TFCI Signalling Mode	O			
<b>DCHs to Modify</b>		0..<maxnoof DCHs>		
DCH ID	M			
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
<b>DCHs to Add</b>		0..<maxnoof DCHs>		
DCH ID	M			
DCH Combination Ind	O			
RLC Mode	M			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP mode	M			
ToAWS	M			
ToAWE	M			
<b>DCHs to Delete</b>		0..<maxnoof DCHs>		
DCH ID	M			
<b>DSCH to Modify</b>		0..1		
Transport Format Set	O			For the DL.
RL ID	O			
Frame Handling Priority	O			
ToAWS	O			
ToAWE	O			
<b>DSCH to Add</b>		0..1		
Transport Format Set	M			For the DL.
RL ID	M			
Frame Handling Priority	M			
ToAWS	M			
ToAWE	M			
<b>DSCH to Delete</b>		0..1		
RL ID	M			
<b>Radio Link Information</b>		0..<maxnoof RLS>		

RL ID	M			
Maximum DL Power	O		DL Power	
Minimum DL Power	O		DL Power	

Range Bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs for a UE.
<i>MaxnoofRLs</i>	Maximum number of RLs for a UE.

### 9.1.46.2 TDD Message

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>UL CCTrCH Information</b>		0..<maxnoof CCTrCHs>		
CCTrCH ID	M			
TFCS	O			
Puncture Limit	O			
<b>DL CCTrCH Information</b>		0..<maxnoof CCTrCHs>		
CCTrCH ID	M			
TFCS	O			
Puncture Limit	O			
<b>DCHs to Modify</b>		0..<maxnoof DCHs>		
DCH ID	M			
CCTrCH ID	O			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	O			DL CCTrCH in which the DCH is mapped
Transport Format Set	O			For the UL.
Transport Format Set	O			For the DL.
Frame Handling Priority	O			
UL FP Mode	O			
ToAWS	O			
ToAWE	O			
<b>DCHs to Add</b>		0..<maxnoof DCHs>		
DCH ID	M			
RLC Mode	M			
CCTrCH ID	M			UL CCTrCH in which the DCH is mapped.
CCTrCH ID	M			DL CCTrCH in which the DCH is mapped
DCH Combination Ind	O			
Transport Format Set	M			For the UL.
Transport Format Set	M			For the DL.
Frame Handling Priority	M			
Payload CRC Presence Indicator	M			
UL FP Mode	M			
ToAWS	M			
ToAWE	M			
<b>DCHs to Delete</b>		0..<maxnoof DCHs>		
DCH ID	M			
<b>DSCH Information to modify</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
CCTrCH ID	O			DL CCTrCH in which the DSCH is mapped
Transport Format Set	O			
Frame handling Priority	O			

ToAWS	O			
ToAWE	O			
<b>DSCH Information to add</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
CCTrCH ID	M			DL CCTrCH in which the DSCH is mapped
Transport Format Set	M			
Frame handling Priority	O			
ToAWS	M			
ToAWE	M			
<b>DSCH Information to delete</b>		0 .. <Maxnoof DSCHs>		
DSCH ID	M			
<b>USCH Information to modify</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
CCTrCH ID	O			UL CCTrCH in which the USCH is mapped
Transport Format Set	O			
<b>USCH Information to add</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
CCTrCH ID	M			UL CCTrCH in which the USCH is mapped
Transport Format Set	M			
<b>USCH Information to delete</b>		0 .. <Maxnoof USCHs>		
USCH ID	M			
<b>RL Information</b>		0..1		
RL ID	M			
Maximum Downlink Power	O		DL Power	
Minimum Downlink Power	O		DL Power	

Range bound	Explanation
<i>MaxnoofDCHs</i>	Maximum number of DCHs for a UE.
<i>MaxnoofCCTrCHs</i>	Maximum number of CCTrCHs for a UE.
<i>MaxnoofDSCHs</i>	Maximum number of DSCHs for one UE
<i>MaxnoofUSCHs</i>	Maximum number of USCHs for one UE

### 9.1.48 RADIO LINK RECONFIGURATION RESPONSE

IE/Group Name	Presence	Range	IE Type and Reference	Semantic Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
<b>RL Information Response</b>		0..<maxnoof RLS>		Only one RL information response group for one group of combined RLs shall be present
RL ID	M			
<b>DCH to be Added</b>		0..<maxnoof DCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DCH to be Modified</b>		0..<maxnoof DCHs>		Only one DCH per set of co-ordinated DCHs shall be included.
DCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH to be Setup</b>		0..<Maxnoof DSCHs>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>DSCH to be Modified</b>		0..<Maxnoof DSCHs>		
DSCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>USCH to be setup</b>		0 .. <MaxnoofU SCHs>		
USCH ID	M			
Binding ID	M			
Transport Layer Address	M			
<b>USCH to be modified</b>		0 .. <MaxnoofU SCHs>		
USCH ID	M			
Binding ID	M			
Transport Layer Address	M			
Criticality diagnostics	O			

Range bound	Explanation
MaxnoofDCHs	Maximum number of DCHs for a UE.
MaxnoofRLs	Maximum number of RLs for a UE.
MaxnoofDSCHs	Maximum number of DSCHs for one UE
MaxnoofUSCHs	Maximum number of USCHs for one UE

### 9.1.48 RADIO LINK DELETION REQUEST

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<b>RL Information</b>		1..<maxn oofRLs>		
RL ID	M			

Range bound	Explanation
MaxnoofRLs	Maximum number of radio links for one UE

### 9.1.49 RADIO LINK DELETION RESPONSE

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context ID	M			
Transaction ID	M			
Criticality diagnostics	O			

### 9.1.50 DL POWER CONTROL REQUEST (FDD only)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Node B Communication Context ID	M			
Transaction ID	M			
<i>CHOICE procedure scope</i>				
"ALL RL's"				
DL Reference Power	M		DL power	
"Individual RL's				
<b>DL Reference Power Information</b>		1..<maxnoofRLs>		
RL ID	M			
DL Reference Power	M		DL power	

Range Bound	Explanation
MaxnoofRLs	Maximum number of Radio Links for a UE

### 9.1.51 DEDICATED MEASUREMENT INITIATION REQUEST

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Node B Communication Context Id	M			
Transaction Id	M			
Measurement Id	M			
Dedicated Measurement Object Type	M			
<i>CHOICE Dedicated Measurement Object Type</i>				
"RL"				
<b>RL Information</b>		1..<maxnoofRLs>		
RL-id	M			
DPCH ID	O			
Dedicated Measurement Type	M			
Measurement Characteristics	M			
Report Characteristics	M			

Range	Explanation
<i>MaxnoofRLs</i>	Maximum number of individual RL's a measurement can be started on.

### 9.1.52 DEDICATED MEASUREMENT INITIATION RESPONSE

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context Id	M			
Transaction Id	M			
Measurement Id	M			
<i>CHOICE Dedicated Measurement Object Type</i>				Dedicated Measurement Object Type the measurement was initiated with
"RL"				
<b>RL Information</b>		1..<maxnoofRLs>		
RL-id	M			
DPCH ID	O			
Dedicated Measurement Value	M			
"ALLRL"				
Dedicated Measurement Value	M			
CFN	O			Dedicated Measurement Time Reference
Criticality diagnostics	O			

Range	Explanation
MaxnoofRLs	Maximum number of individual RL's the measurement can be started on.

### 9.1.53 DEDICATED MEASUREMENT INITIATION FAILURE

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context Id	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			
Criticality diagnostics	O			

### 9.1.54 DEDICATED MEASUREMENT REPORT

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context Id	M			
Transaction Id	M			
Measurement Id	M			
CHOICE Dedicated Measurement Object Type				Dedicated Measurement Object Type the measurement was initiated with
"RL"				
<b>RL Information</b>		1..<maxn oofRLs>		
RL-id	M			
DPCH ID	O			
Dedicated Measurement Value	M			
"ALLRL"				
Dedicated Measurement Value	M			
CFN	O			Dedicated Measurement Time Reference

Range	Explanation
MaxnoofRLs	Maximum number of individual RL's the measurement can be started on.

### 9.1.55 DEDICATED MEASUREMENT TERMINATION REQUEST

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
Node B Communication Context Id	M			
Transaction Id	M			
Measurement Id	M			

### 9.1.56 DEDICATED MEASUREMENT FAILURE INDICATION

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Discriminator	M			
Message Type	M			
CRNC Communication Context Id	M			
Transaction Id	M			
Measurement Id	M			
Cause	M			

### 9.1.57 RADIO LINK FAILURE INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
CRNC Communication Context ID	M			
<b>Radio Link Information</b>		1 to <MaxnoofRLs>		
RL ID	M			
Cause	M			

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.

### 9.1.58 RADIO LINK RESTORE INDICATION

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
Transaction ID	M			
CRNC Communication Context ID	M			
<b>Radio Link Information</b>		1 to <MaxnoofRLs>		
RL ID	M			

Range bound	Explanation
MaxnoofRLs	Maximum no. of RLs for one UE.

### 9.1.59 COMPRESSED MODE PREPARE (FDD only)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
NodeB communication context ID	M			
Transaction ID	M			
TGP1	M		Gap Period	Refer to 25.215
TGP2	O		Gap Period	Refer to 25.215
TGL	M			
TGD	M			
PD	M			
UL/DL compressed mode selection	M			
Compressed mode method	M			
Gap Position Mode	M			
SN	C-Flex		TimeSlot	
Downlink Frame Type	M			
Scrambling Code Change	C-SF/2			
Power Control Mode	M			
Power Resume Mode	M			
UL delta Eb/No	M			
UL delta Eb/No after	M			

Condition	Explanation
Flex	This IE is present only if "Gap position Mode" equals to 'flexible'.
SF/2	This IE is present only if Compressed Mode Method equals to SF/2

### 9.1.60 COMPRESSED MODE READY (FDD only)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC communication context ID	M			
Transaction ID	M			
Criticality diagnostics	O			

### 9.1.61 COMPRESSED MODE COMMIT (FDD only)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
NodeB communication context ID	M			
Transaction ID	M			
CFN	M			

### 9.1.62 COMPRESSED MODE FAILURE (FDD only)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
CRNC communication context ID	M			
Transaction ID	M			
Cause	M			
Criticality diagnostics	O			

### 9.1.63 COMPRESSED MODE CANCEL (FDD only)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator	M			
Message Type	M			
NodeB communication context ID	M			
Transaction ID	M			

### 9.1.64 ERROR INDICATION

Information Element	Presence	Range	IE Type and Reference	Semantics Description
Message Type	M			
Message Discriminator	M			
Transaction Id	M			
Cause	C_ifalone			
CRNC Communication Context Id	C_ifUL			
Node B Communication Context Id	C_ifDL			
Criticality diagnostics	C_ifalone			

Condition	Explanation
C_ifDL	This IE is only present when message is transmitted by RNC
C_ifUL	This IE is only present when message is transmitted by node B
C_ifalone	At least either of Cause IE or Criticality Diagnostics IE shall be present.

## 9.2 Information Element Functional Definition and Contents

### 9.2.1 Common parameters

#### 9.2.1.1 Add/Delete Indicator

The add/delete indicator shall notify the RNC whether the associated resource has been added to or removed from the Node B.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Add/Delete Indicator			ENUMERATED(Add, Delete)	

#### 9.2.1.2 Availability Status

The availability status is used to indicate more detailed information of the availability of the resource. In accordance with [6], following values are defined. If the value of this attribute is an empty set, this implies that none of the status conditions described in [6] are present.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Availability Status			ENUMERATED (empty, in test, failed, power off, off line, off duty, dependency, degraded, not installed, log full, ...)	

### 9.2.1.3 BCCH Modification Time

Indicates the time after which the new system information shall be applied on BCCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
BCCH Modification Time			Integer (0, 2, 4, ..., 4095)	All even SFN values are allowed The tabular description is a direct copy from TS 25.331 CR 078

### 9.2.1.4 Binding ID

The Binding ID is the identifier of a user data stream. It is allocated at Node B and it is unique for each transport bearer under establishment to/from the Node B. The length of this parameter is variable.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Binding ID			Octetstring (1..4,...)	

### 9.2.1.5 Blocking Priority Indicator

The Blocking priority indicator shall indicate the immediacy with which a resource should be blocked from use. The following priority classes shall be supported in the Blocking priority indicator.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Blocking Priority Indicator			ENUMERATED (High, Normal, Low)	High priority: Block resource immediately. Normal priority: Block resource when idle or upon timer expiry. Low priority: Block resource when idle.

### 9.2.1.6 Cause

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Cause group	M		Enumerated (Radio Network Layer, Transport Layer, Protocol, Misc)	
<i>CHOICE Cause group</i>				
<i>Radio Network Layer</i>				
Radio Network Layer Cause	M		Enumerated (unknown C-ID, Cell not available, Power level not supported, UL scrambling code already in use, DL radio resources not available, UL radio resources not available, RL Already Activated/allocated Node B Resources Unavailable Insufficient physical channel resources Measurement not supported for the object, Macrodiversity combining not possible, Reconfiguration not allowed, Requested configuration not supported Synchronization failure, Unspecified)	
<i>Transport Layer</i>				
Transport Layer Cause	M		Enumerated (Transport link failure, Transmission port not available, Transport resource unavailable Unspecified)	
<i>Protocol</i>				
Protocol Cause			Enumerated (Transaction not allowed, Transfer syntax error, Abstract syntax error (reject), Abstract syntax error (ignore and notify), Message not compatible with receiver state Semantic error Unspecified)	
<i>Misc</i>				
Miscellaneous Cause	M		Enumerated (Control processing overload Hardware failure, O&M intervention, Not enough user plane processing resources, Unspecified)	

### 9.2.1.7 CFN

Connection Frame Number for the radio connection, see ref. [25.402].

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
CFN			Integer (0..255)	

### 9.2.1.8 C-ID

The C-ID (Cell identifier) is the identifier of a cell in one RNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
C-ID			INTEGER (0...65535)	

### 9.2.1.9 Common Measurement Object Type

The Common Measurement Object type indicates the type of object that the measurement is to be performed on.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Object Type			ENUMERATED (CELL, RACH,...)	

### 9.2.1.10 Common Measurement Type

The Common Measurement Type identifies which measurement that shall be performed.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
Common Measurement Type			ENUMERATED (RSSI, Transmitted Carrier Power, Acknowledged RA tries, Timeslot ISCP,...)	

### 9.2.1.11 Common Measurement Value

The Common Measurement Value shall be the most recent value for this measurement, for which the reporting criteria were met.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
Transmitted Carrier Power Value	O		Enumerated(-35 .. 15), step 0.1 dB	
RSSI Value	O		Enumerated(-30..-100) step 0.1	
Acknowledged RA tries Value	O		TBD	The number of L1 acknowledged random access tries per transmission time interval on the PCCPCH.
Timeslot ISCP (TDD only)	O		TBD	

<Editors Note: Some adjustment of the ranges for these measurements might be needed as they await a decision on range for this measurement in TSG RAN WG1>

#### 9.2.1.12 Common Physical Channel Id

Common Physical Channel Id is the unique identifier for one common physical channel within a cell.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Common Physical Channel ID			Integer(0..255)	

#### 9.2.1.13 Common Transport Channel Id

Common Transport Channel Id is the unique identifier for one common transport channel within a cell.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Common Transport Channel ID			Integer(0..255)	

#### 9.2.1.14 Communication Control Port ID

A Communication Control Port corresponds to one signalling bearer between the RNC and Node B for the control of Node B Communication Contexts. Node B may have multiple Communication Control Ports (one per Traffic Termination Point). The Communication Control Port is selected at creation of the Node B Communication Context. The Communication Control Port ID is the identifier of the Communication Control Port.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Communication Control Port ID			INTEGER(0..65535)	

#### 9.2.1.15 Configuration Generation ID

The Configuration Generation ID describes the generation of the configuration of logical resources in a cell.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Configuration Generation ID			Integer(0..255)	Value '0' means "No configuration". At possible wraparound of the ID counter in CRNC the value '0' shall not be used.

### 9.2.1.16 Criticality diagnostics

IE/Group Name	Presence	Range	IE type and reference	Semantics description
<b>Criticality Diagnostics</b>				
Procedure Code	O		INTEGER (0..255)	Procedure code is to be used if Criticality diagnostics is part of Error Indication procedure, and not within the response message of the same operation that caused the error
Triggering Message	O		ENUMERATED(initiating message, successful outcome, unsuccessful outcome, outcome)	The Triggering Message is used only if the Criticality diagnostics is part of Error Indication except when the procedure code is not understood.
Criticality Response	O		ENUMERATED(reject, ignore, notify)	This Criticality response IE is used for reporting the Criticality of the Triggering message
Transaction Id	O		INTEGER (0..255)	
<b>Information Element Criticality Diagnostics</b>		1 to <maxnoof errors>		
Criticality Response	M		ENUMERATED(reject, ignore, notify)	The Criticality response IE is used for reporting the criticality of the triggering IE. The value 'ignore' shall never be used.
IE Id	M		INTEGER (0..65535)	The IE Id of the not understood IE

Range bound	Explanation
maxnooferrors	Maximum no. of IE errors allowed to be reported with a single message. The value for maxnooferrors is 256.

### 9.2.1.17 CRNC Communication Context ID

The CRNC Communication Context ID is the identifier of the Communication Context in the CRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CRNC Communication Context ID			INTEGER (0..2^20 -1)	

### 9.2.1.18 DCH Combination Indicator

The DCH Combination Indicator is used to indicate the multiplexing of more than one DCH on transport bearer. The value should be unique for each group of coordinated DCH's per request message.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DCH Combination Ind			INTEGER (0..255)	

### 9.2.1.19 DCH ID

The DCH ID is the identifier of an active dedicated transport channel. It is unique for each active DCH among the active DCHs simultaneously allocated for the same UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DCH ID			INTEGER (0..255)	

### 9.2.1.20 DL Power

The DL Power IE indicates a power level relative to the [FDD-primary CPICH power] [TDD-primary CCPCH power] configured in a cell.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
DL Power			Enumerated(-35..+15dB)	Step 0.1dB

### 9.2.1.21 Dedicated Measurement Object Type

The Dedicated Measurement Object type indicates the type of object that the measurement is to be performed on.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Object Type			ENUMERATED (RL, ALLRL, ...)	

### 9.2.1.22 Dedicated Measurement Type

The Dedicated Measurement Type identifies the type of measurement that shall be performed.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated Measurement Type			ENUMERATED (SIR, SIR Error, Transmitted Code Power, RSCP,...)	RSCP is used by TDD only.

**Note.** For definitions of the measurement types refer to 25.215 and 25.225.

### 9.2.1.23 Dedicated Measurement Value

The Dedicated Measurement Value shall be the most recent value for this measurement, for which the reporting criteria were met.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
Dedicated measurement Value				
SIR value	O		Enumerated(-10 .. 20), step 0.1 dB	
SIR error Value	O		Enumerated (-10 .. 10), step 0.1 dB	If SIRerror<=-10, SIR error Value shall be set to -10 If SIRerror=>10, SIR error Value shall be set to 10
Transmitted Code Power Value	O		Enumerated (-35 .. 15), step 0.1 dB	Relative to CPICH
RSCP	O		TBD	TDD only.

<Editors Note: Some adjustment of the ranges for these measurements might be needed as they await a decision on range for this measurement in TSG RAN WG1>

#### 9.2.1.24 DSCH ID

The DSCH ID uniquely identifies a DSCH within a Node B Communication Context.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
DSCH ID			INTEGER (0..255)	

#### 9.2.1.25 DSCH Transport Format Set

This parameter defines the transport format set for DSCH.

Note: the parameter need to be defined. It may correspond to the DL TFS defined for DCH

#### 9.2.1.26 DSCH Transport Format Combination Set

This parameter defines the transport format combination set for DSCH.

Note: to be defined. Each DSCH TFCI also indicates the code to be used

Note: the parameter need to be defined. It may correspond to the DL TFS defined for DCH

#### 9.2.1.27 Frame Handling Priority

This parameter indicates the priority level to be used during the lifetime of the DCH/DSCH for temporary restriction of the allocated resources due overload reason.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Frame Handling Priority			INTEGER (0..15)	0=lower priority, 15=higher priority

#### 9.2.1.28 Frame Offset

Frame Offset is the required offset between the dedicated channel downlink transmission frames (CFN, Connection Frame Number) and the broadcast channel frame offset (Cell Frame Number). The Frame\_offset is used in the translation between Connection Frame Number (CFN) on Iub/Iur and least significant 8 bits of SFN (System Frame Number) on Uu. The Frame Offset is UE and cell specific.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Frame Offset			INTEGER (0..255)	Frames

### 9.2.1.29 IB\_SG

Segment which is part of an Information Block.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB SG			Bit String	Contents defined in ref:25.331.

### 9.2.1.30 IB\_SG\_POS

First position of an Information Block segment in the SFN cycle (IB\_SG\_POS < IB\_SG REP).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB SG POS			INTEGER (0..2 <sup>12</sup> -1)	

### 9.2.1.31 IB\_SG\_REP

Repetition distance for an Information Block segment. The segment shall be transmitted when SFN mod IB\_SG\_REP = IB\_SG\_POS.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB SG REP			INTEGER (16, 32, 64, 128, 256, 512, 1024, 2048)	Repetition period for the IB segment in frames

### 9.2.1.32 IB Type

The IB type identifies a specific system information block.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
IB Type			Enumerated (MIB, SIB1, SIB2, ..., SIB12, ...)	Complete R99 SIB range still TBD.

### 9.2.1.33 Indication Type

The indication type shall indicate the category of a failure with respect to its impact on the logical resources supported at Node B.

Information Element / Group Name	Presence	Range	IE type and reference	Semantics description
Indication Type			ENUMERATED (No Failure, Service Impacting, Cell Control,...)	Service Impacting – The failure has impacted on the logical resources supported at Node B. Cell Control – The failure has impacted on the ability for the cell parameters to be administered or O&M functions performed.

### 9.2.1.34 Local Cell ID

The local cell ID represents resources in Node B that can be used for the configuration of a cell.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
Local Cell ID			INTEGER(0 ...26843545 5)	

### 9.2.1.35 Maximum DL Power Capability

This parameter indicates the maximum DL power capability for a local cell within Node B.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Maximum DL Power Capability			ENUMERATED (0...50)	dBm, granularity 1 dBm

### 9.2.1.36 Max Transmission Power

Max Transmission Power is maximum power for all downlink channels added together, that is allowed to be used simultaneously in a cell.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
Maximum transmission Power			ENUMERATED (0, 1, 2 ..50)	Unit dBm Granularity 1 dB

### 9.2.1.37 Measurement ID

The Measurement Id uniquely identifies any measurement per (Node B- or communication) control port.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
Measurement ID			Integer(0 .. 2^20-1)	

### 9.2.1.38 Measurement Characteristics

The Measurement Characteristics indicates how the measurement shall be performed.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
<b>Measurement Characteristics</b>				
Measurement Frequency	M		TBD	
Averaging Duration	M		TBD	

Editors Note: The exact definition and structure of this information element awaits decisions in TSG RAN WG2.

### 9.2.1.39 Report Characteristics

The report characteristics defines how the reporting shall be performed.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
<b>Report characteristics</b>				
Report characteristics type			ENUMERATED ED(On Demand, Periodic, Event A, Event B, Event C, Event D, Event E, Event F)	
<b>Periodic Report Information</b>	C – Periodic			
Report Periodicity	M		ENUMERATED ED (10ms...1min) step 10ms, (1min...1hr) step 1min	The frequency with which the Node B shall send measurement reports. First working assumption!
<b>Event A</b>	C – Event A			
Measurement Threshold	M		TBD	The threshold for which the Node B shall trigger a measurement report.
Measurement Hysteresis Time	O		ENUMERATED ED (10ms...1min) step 10ms,...	
<b>Event B</b>	C – Event B			
Measurement Threshold	M		TBD	The threshold for which the Node B shall trigger a measurement report.
Measurement Hysteresis Time	O		ENUMERATED ED (10ms...1min) step 10ms,...	
<b>Event C</b>	C – Event C			
Measurement Increase Threshold	M		TBD	
Measurement Change Time	M		ENUMERATED ED (10ms...1min) step 10ms,...	The time the measurement entity shall rise on (in ms), in order to trigger a measurement report.
<b>Event D</b>	C – Event D			
Measurement Decrease Threshold	M		TBD	
Measurement Change Time	M		ENUMERATED ED (10ms...1min) step 10ms,...	The time the measurement entity shall fall (in ms), in order to trigger a measurement report.
<b>Event E</b>	C – Event E			
Measurement Threshold 1	M		TBD	
Measurement Threshold 2	O		TBD	

Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	The hysteresis time in ms
Report Periodicity	O		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The frequency with which the Node B shall send measurement reports.
<b>Event F</b>	C – Event F			
Measurement Threshold 1	M		TBD	
Measurement Threshold 2	O		TBD	
Measurement Hysteresis Time	O		ENUMERATED (10ms...1min) step 10ms,...	The hysteresis time in ms
Report Periodicity	O		ENUMERATED (10ms...1min) step 10ms, (1min...1hr) step 1min	The frequency with which the Node B shall send measurement reports.

Editors note: Encoding of threshold TBD.

Condition	Explanation
C-Periodic	Valid if Report Characteristics Type IE indicates "periodic"
C-Event A	Valid if Report Characteristics Type IE indicates "Event A"
C-Event B	Valid if Report Characteristics Type IE indicates "Event B"
C-Event C	Valid if Report Characteristics Type IE indicates "Event C"
C-Event D	Valid if Report Characteristics Type IE indicates "Event D"
C-Event E	Valid if Report Characteristics Type IE indicates "Event E"
C-Event F	Valid if Report Characteristics Type IE indicates "Event F"

#### 9.2.1.40 Message discriminator

This field is used to discriminate between Dedicated NBAP and Common NBAP messages.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Discriminator			ENUMERATED (Common,Dedicated)	

#### 9.2.1.41 Message Type

The Message Type uniquely identifies the message being sent.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Message Type			ENUMERATED (           COMMON TRANSPORT CHANNEL SETUP REQUEST,           COMMON TRANSPORT CHANNEL SETUP RESPONSE,           COMMON TRANSPORT CHANNEL SETUP FAILURE,           COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST,           COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE,           COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE,           COMMON TRANSPORT CHANNEL DELETION REQUEST,           COMMON TRANSPORT CHANNEL DELETION RESPONSE,           BLOCK RESOURCE REQUEST,           BLOCK RESOURCE RESPONSE,           BLOCK RESOURCE FAILURE,           UNBLOCK RESOURCE INDICATION,           AUDIT REQUIRED INDICATOIN           AUDIT REQUEST           AUDIT RESPONSE           COMMON MEASUREMENT INITIATION REQUEST,           COMMON MEASUREMENT INITIATION RESPONSE,           COMMON MEASUREMENT INITIATION FAILURE,           COMMON MEASUREMENT REPORT,           COMMON MEASUREMENT TERMINATION REQUEST,           COMMON MEASUREMENT TERMINAITON FAILURE INDICATION,           CELL SETUP REQUEST,           CELL SETUP RESPONSE,           CELL SETUP FAILURE,           CELL RECONFIGURATION REQUEST,           CELL RECONFIGURATION RESPONSE,           CELL RECONFIGURATION FAILURE,           CELL DELETION REQUEST,           CELL DELETION RESPONSE,           RESOURCE STATUS INDICATION,           SYSTEM INFORMATION UPDATE REQUEST,           SYSTEM INFORMATION UPDATE RESPONSE,           SYSTEM INFORMATION UPDATE FAILURE,           RL SETUP REQUEST,           RL SETUP RESPONSE,           RL SETUP FAILURE,           RL ADDITION REQUEST,           RL ADDITION RESPONSE,           RL ADDITION FAILURE,           RL RECONFIGURATION PREPARE,           RL RECONFIGURATION READY,           RL RECONFIGURATION FAILURE,           RL RECONFIGURATION COMMIT,           RL RECONFIGURATION CANCEL,           RL RECONFIGURATION REQUEST,           RL RECONFIGURATION RESPONSE,           RL DELETION REQUEST,           RL DELETION RESPONSE,           DL POWER CONTROL REQUEST,           DEDICATED MEASUREMENT INITIATION REQUEST,           DEDICATED MEASUREMENT INITIATION RESPONSE,           DEDICATED MEASUREMENT INITIATION FAILURE,           DEDICATED MEASUREMENT REPORT,           DEDICATED MEASUREMENT TERMINATION REQUEST,           DEDICATED MEASUREMENT TERMINAITON FAILURE INDICATION,           RL FAILURE INDICATION,         )	Future extensions shall be possible

			RL RESTORE INDICATION, COMPRESSED MODE PREPARE, COMPRESSED MODE READY, COMPRESSED MODE COMMIT, COMPRESSED MODE FAILURE, COMPRESSED MODE CANCEL ERROR INDICATION, ...)	
--	--	--	--	--

#### 9.2.1.42 Minimum Spreading Factor

This parameter indicates the minimum spreading factor supported at a cell within the Node B.

Information Element / Group Name	Presence	Range	IE type and reference	Semantics description
Minimum Spreading Factor			Enumerated(4, 16, 32, 64, 128, 256, 512)	

#### 9.2.1.43 Node B Communication Context ID

The Node B Communication Context ID is the identifier of the Communication Context in the Node B, it corresponds to the dedicated resources which are necessary for an UE using one or more dedicated channels in a given Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Node B Communication Context ID			INTEGER (0..2^20-1)	2^20-1 is reserved value to indicate all the existing and future Node B communication contexts that can be reached by the communication control port.

#### 9.2.1.44 Payload CRC presence

This parameter indicates whether FP payload 16 bit CRC is used or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Payload CRC Presence Indicator			ENUMERATED (CRC Included, CRC not included)	

#### 9.2.1.45 Puncture limit

The Puncture limit limits the amount of puncturing that can be applied in order to minimise the number of dedicated physical channels.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL puncture limit			INTEGER (0..100)	%

#### 9.2.1.46 Resource Operational State

The resource operational state is used to indicate the current operational state of the associated resource following a Node B failure.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Resource Operational State			ENUMERATED(Enabled, Disabled)	When a resource is marked as disabled, then its child resources are implicitly disabled. Cell Resource hierarchy can be referred to [6].

#### 9.2.1.47 RLC Mode

This parameter defines the RLC mode of the logical channels multiplexed on the transport channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RLC mode			ENUMERATED(Acknowledged Mode, Unacknowledged Mode, Transparent Mode)	

#### 9.2.1.48 RL ID

The RL ID is the unique identifier for one RL associated with a UE.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
RL ID			INTEGER (0..31)	

#### 9.2.1.49 Segment Type

Indicates the type of segment of the SIB.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Segment Type			Enumerated (First, Subsequent, Last, Complete)	

#### 9.2.1.50 SIB Deletion Indicator

Indicates if the SIB shall be deleted or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SIB Deletion Indicator			Enumerated(NoDeletion, Deletion)	

#### 9.2.1.51 SIB Originator

Indicates if the Node B shall fill in the SIB information or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SIB Originator			Enumerated( NodeB, CRNC)	

### 9.2.1.52 Shutdown Timer

The shutdown timer shall indicate the length of time available to the CRNC to perform the block of a resource when a Normal priority block is requested.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Shutdown Timer			INTEGER(1..3600)	Value in seconds

### 9.2.1.53 TFCI Presence

The TFCI Presence parameter indicates whether the TFCI shall be included.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI presence			ENUMERATED (Present, not present)	

### 9.2.1.54 TFCS (Transport Format Combination Set)

The Transport Format Combination Set is defined as a set of Transport Format Combinations on a Coded Composite Transport Channel. It is the allowed Transport Format Combinations of the corresponding Transport Channels. The DL Transport Format Combination Set is applicable for DL Transport Channels.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCS		1 to <maxnoofTFCs>		The first instance of the parameter corresponds to TFC zero, the second to 1 and so on.
CTFC	M		INTEGER(0..MaxCTFC-1)	Integer number calculated according to TS 25.331

Range bound	Explanation
MaxnoofTFCs	The maximum number of Transport Format Combinations (1024).
MaxCTFC	Maximum number of the CTFC value is calculated according to the following: $\sum_{i=1}^I (L_i - 1)P_i$ with the notation according to TS 25.331

### 9.2.1.55 TFS (Transport Format Set)

The Transport Format Set is defined as the set of Transport Formats associated to a Transport Channel, e.g. DCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL Transport Format Set				
<b>Dynamic Transport Format Information</b>		1 to <maxTFcount>		
Number of Transport blocks	M		INTEGER (0..4095)	
Transport Block Size	C – Blocks		INTEGER (1..5000)	Bits
CHOICE mode				
TDD				
Transmission time interval	C-TTIdynamic	1 to <maxTTIcount>	Enumerated(10, 20, 40, 80)	
<b>Semi-static Transport Format Information</b>				
Transmission time interval	C-TTIsemistatic		ENUMERATED (10, 20, 40, 80)	msec
Type of channel coding	M		ENUMERATED (No coding, Convolutional, Turbo)	
Coding Rate	C – Coding		ENUMERATED (1/2, 1/3)	
Rate matching attribute	M		INTEGER (1..maxRM)	
CRC size	M		ENUMERATED (0, 8, 12, 16, 24)	
CHOICE mode				
TDD				
2 <sup>nd</sup> interleaving mode	M		Enumerated(Frame related, Timeslot related)	

Condition	Explanation
Blocks	This IE is only present if "Number of Transport Blocks" is greater than 0.
Coding	This IE is only present if IE "Type of channel coding" is "Convolutional" or "Turbo"
TTIdynamic	This IE is mandatory if not defined as semistatic parameter. Otherwise it is absent.
TTIsemistatic	This IE is mandatory if not defined as dynamic parameter. Otherwise it is absent.

Range bound	Explanation
MaxTFcount	Maximum number of different transport formats that can be included in the Transport format set for one transport channel is 32.
MaxRM	Maximum number that could be set as rate matching attribute for a transport channel.
maxTTIcount	The amount of different TTI that are possible for that transport format is 4.

### 9.2.1.56 ToAWE

TOAWE is the window endpoint. DL data frames are expected to be received before this window endpoint. TOAWE is defined with a positive value relative Latest Time of Arrival (LTOA). A data frame arriving after TOAWS gives a Timing Adjustment Control frame response.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
ToAWE			INTEGER (0..2559)	msec.

### 9.2.1.57 ToAWS

TOAWS is the window startpoint. DL data frames are expected to be received after this window startpoint. TOAWS is defined with a positive value relative Time of Arrival Window Endpoint (TOAWE). A data frame arriving before TOAWS gives a Timing Adjustment Control frame response.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
ToAWS			INTEGER (0..1279)	msec.

### 9.2.1.58 Transaction ID

The Transaction ID is used to associate all the messages belonging to the same pending procedure of the same NBAP procedure type (e.g. Radio Link Addition), i.e. the Request-, Response-, Confirm-type of messages have the same Transaction ID. The messages belonging to different pending procedures have different Transaction IDs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transaction ID			INTEGER (0..255)	Since the scope is not clear, the range of this parameter is to be considered a working assumption

### 9.2.1.59 Transport Layer Address

Transport Layer Address defines the transport address of the NodeB. For details on the Transport Address used see [2].

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Transport Layer Address			Bit string(1...160, ...)	

### 9.2.1.60 UARFCN

Designate the central frequency of the channel number.

Information Element / Group Name	Presence	Range	IE Type and Reference	Semantics Description
UARFCN			INTEGER(0..698,...)	corresponds to 1885.2MHz..2024.8MHz (25.101, section 5.4 and 25.105)

[Editor's Note: in RRC they have additional attributes such as the "raster" included in the IE ]

### 9.2.1.61 UL FP mode

This parameter defines if normal or silent mode of the Frame Protocol shall be used for the UL.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL FP mode			ENUMERATED (Normal, Silent)	

### 9.2.1.62 UL interference level

The UL interference level indicates the UL interference at a certain cell under CRNC.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL interference level			ENUMERATED ED(-128.0dBm...-60.0dBm)	Resolution is 0.1 dBm.

## 9.2.2 FDD specific parameters

### 9.2.2.1 AICH Transmission Timing

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
AICH Transmission Timing			ENUMERATED ED (0, 1)	According to 25.331 chapter 10.2.6.17.

### 9.2.2.2 Chip Offset

The Chip Offset is defined as the radio timing offset inside a radio frame. The Chip offset is used as offset for the DL DPCH relative to the Primary CPICH timing.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Chip Offset			INTEGER (0..38399)	Chips

### 9.2.2.3 Compressed mode method

Defines the method for generating the downlink compressed mode gap, as described in 25.212.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Compressed Mode Method			ENUMERATED ED (None, Puncturing, SF/2, gating)	None = restore the normal mode

### 9.2.2.4 D-Field Length

Defines the D Field size of the UL DPCCH slot.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
D Field Length			ENUMERATED ED (1, 2)	

### 9.2.2.5 Diversity Control Field

The Diversity Control Field indicates if the current RL may, must or must not be combined with the already existing RLs.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Control Field			ENUMERATED(May, Must, Must not)	

### 9.2.2.6 Diversity Indication

The Diversity Indication indicates if the RL has been or has not been combined with another RL.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Indication			ENUMERATED(ED (Combined, not combined))	

### 9.2.2.7 Diversity mode

Define the diversity mode to be applied.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Diversity Mode			ENUMERATED(ED(None, STTD, Closed loop mode 1, Closed loop mode2))	

### 9.2.2.8 DL DPCCH Slot Format

Indicates the slot format used in DPCCH in DL, accordingly to 25.211.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL DPCCH slot format			INTEGER(0..16)	

### 9.2.2.9 DL frame type

This parameter defines if frame structure type 'A' or 'B' shall be used in downlink compressed mode. This is defined in TS 25.212

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Downlink Frame Type			ENUMERATED(ED (TypeA, TypeB))	

### 9.2.2.10 DL Scrambling Code

DL scrambling code to be used by the RL. One cell may have multiple DL scrambling codes available.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DL Scrambling Code			INTEGER (0..15)	0= Primary scrambling code of the cell 1...15= Secondary scrambling code

### 9.2.2.11 Multiplexing Position

Multiplexing Position specifies whether fixed or flexible positions of transport channels shall be used in the physical channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Multiplexing Position			ENUMERATED(Fixed, Flexible)	

### 9.2.2.12 FDD DL Channelisation Code Number

The DL Channelisation Code Number indicates the DL Channelisation Code number for a specific DL physical channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
FDD DL ChannalisationCode Number			INTEGER(0.. 255)	The maximum value is equal to the DL spreading factor –1

### 9.2.2.13 FDD S-CCPCH Offset

The Secondary CCPCH offset is defined as the time offset towards the Primary CCPCH in the cell. The offset is a multiple of 256 chips.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
FDD S-CCPCH Offset			INTEGER(0.. 149)	0: 0 chip 1: 256 chip 2: 512 chip .. 149: 38144 chip [TS 25.211]

### 9.2.2.14 Gap Period

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Gap Period			INTEGER(0..255)	Frames

### 9.2.2.15 Gap Position Mode

The gap position can be fixed or adjustable, as defined in TS 25.212.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Gap Position Mode			ENUMERATED (Fixed, Flexible)	

### 9.2.2.16 Maximum Number of UL DPDCHs

This parameter is an UE Radio Access Capability parameter which is needed in rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Max Number of UL DPDCHs			INTEGER (1..6)	

### 9.2.2.17 Minimum UL Channelisation Code Length

Minimum UL channelisation code length (spreading factor) of a DPDCH which is supported by UE. Needed by rate matching algorithm.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Min UL Channelisation Code length			ENUMERATED (4,8,16, 32,64,128, 256)	

### 9.2.2.18 Pattern Duration (PD)

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PD			INTEGER(0..2047, ...)	Frames

### 9.2.2.19 PICH Mode

The number of paging indicators (PIs) in a PICH frame.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
PICH Mode			Enumerated(18, 36, 72, 144)	Number of PI per frame

### 9.2.2.20 Pilot Bits Used Indicator

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Pilot Bits Used Indicator			ENUMERATED (Pilot Bits Used, Pilot Bits not Used)	

### 9.2.2.21 Power Control Mode

Power Control Mode specifies the uplink power mode applied during recovery period after each transmission gap in compressed mode. PCM can take 2 values (0 or 1). The different power control modes are described in TS 25.214.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Control Mode			ENUMERATED (0, 1,...)	

### 9.2.2.22 Power Offset

This IE defines a power offset respect the Downlink transmission power of a DPCH.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Offset			INTEGER (0...24)	Step 0.25 dB, range 0-6 dB

### 9.2.2.23 Power Resume Mode

Power Resume Mode selects the uplink power control method to calculate the initial transmit power after the gap. PRM can take two values (0 or 1) and is described in TS 25.214.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Power Resume Mode			ENUMERATED (0, 1,...)	Described in TS 25.214

### 9.2.2.24 Preamble Signature

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Preamble Signatures			BIT STRING (16)	Bit 0=P0 Bit 1=P1 .. Bit 15=P15 [25.213]

### 9.2.2.25 Primary Scrambling code

The Primary scrambling code to be used in the cell.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Primary Scrambling Code			Integer (0 .. 511)	

### 9.2.2.26 Primary CPICH Power

Primary CPICH power is the power that shall be used for transmitting the P-CPICH in a cell.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Primary CPICH power			Enumerated (-15, .., 40)	Unit dBm Granularity 0.1 dB

### 9.2.2.27 Propagation Delay

Propagation delay is the one-way propagation delay of the radio signal from the MS to the Node B.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Propagation Delay			INTEGER (0..255)	Chips. Step size is 3 chips. 0=0 chips, 1=3 chips, ...

### 9.2.2.28 RACH Slot Format

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
RACH Slot Format			ENUMERATED(0..3)	See 25.211.

### 9.2.2.29 RACH sub Channel numbers

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
RACH Sub Channel Numbers			BIT STRING (15)	Bit 0=Sub Channel Number 0 Bit 1=Sub Channel Number 1 ... Bit 14=Sub Channel Number 14

### 9.2.2.30 Scrambling code change

This parameter indicates whether the alternative scrambling code is used for compressed mode method 'SF/2'.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Scrambling Code Change			ENUMERATED (Change, No change)	

### 9.2.2.31 Scrambling Code Word Number

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Scrambling Code Word Number			INTEGER (0..255)	

### 9.2.2.32 Secondary CCPCH Slot Format

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Secondary CCPCH Slot Format			INTEGER(0..8)	

### 9.2.2.33 S-Field Length

The UE uses the S Field of the UL DPCCH slot to send the SSDT Cell ID to the network.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
S Field Length			ENUMERATED (1, 2)	

### 9.2.2.34 SSDT Cell Identity

The SSDT Cell ID is a temporary ID for SSDT assigned to a cell.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSDT Cell Identity			ENUMERATED (a, b.., h)	

### 9.2.2.35 SSDT Cell ID Length

The SSDT Cell ID Length parameter shows the length of the SSDT Cell ID.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Cell ID Length			ENUMERATED (Short, Medium, Long)	

### 9.2.2.36 SSDT Support Indicator

The SSDT Support Indicator indicates whether a RL supports SSDT or not.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
SSDT Support Indicator			ENUMERATED (SSDT Supported, SSDT not supported).	

### 9.2.2.37 SSDT Indication

The SSDT Indication indicates whether SSDT is in use by the UE or not.

Information Element/Group name	Presence	Range	IE type and reference	Semantics description
SSDT Indication			ENUMERATED (SSDT Active in the UE, SSDT not Active in the UE)	

### 9.2.2.38 STTD Indicator

Indicates if STTD shall be active or not.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
STTD Indicator			ENUMERATED (active,	

			inactive)	
--	--	--	-----------	--

### 9.2.2.39 T\_Cell

Timing delay used for defining start of SCH, CPICH and the DL scrambling code(s) in a cell relative BFN. Resolution 256 chips.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
T Cell			Enumerated (0 , 1, ..,9)	0: 0 chip 1: 256 chip .. 9: 2304 chip [TS 25.402]

### 9.2.2.40 TFCI signalling mode

This parameter indicates if the normal or split mode is used for the TFCI.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI signalling mode			ENUMERATED (Normal, Split)	

### 9.2.2.41 TGD

Transmission Gap Distance is the duration of transmission between two consecutive transmission gaps within a transmission gap period, expressed in number of frames. In case there is only one transmission gap in the transmission gap period, this parameter shall be set to zero.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TGD			INTEGER(0..255)	Frames

### 9.2.2.42 TGL

Transmission Gap Length is the duration of no transmission, expressed in number of slots.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TGL			INTEGER (3,4,7,10,14)	Slot

### 9.2.2.43 TPC DL step size

This parameter indicates step size for the DL power adjustment.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TPC Downlink step size			ENUMERATED (0.5, 1)	

### 9.2.2.44 Transmit Diversity Indicator

Indicates if transmit diversity shall be active or not for primary and secondary CPICH.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Transmit Diversity Indicator			ENUMERATED (active, inactive)	

### 9.2.2.45 TSTD Indicator

Indicates if TSTD shall be active or not.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
TSTD Indicator			ENUMERATED (active, inactive)	

### 9.2.2.46 UL/DL compressed mode selection:

This parameter specifies whether compressed mode is used in UL only, DL only or both UL and DL

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL/DL compressed mode selection			ENUMERATED (in UL only, DL only or both UL and DL)	

### 9.2.2.47 UL delta Eb/No

The delta in uplink Eb/No that shall be added to the Eb/No target used during compressed mode frames.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Delta Eb/No			Enumerated (-6..+10dB)	Step 0.1 dB.

### 9.2.2.48 UL delta Eb/No after

The delta in uplink Eb/No target that shall be added to the Eb/No target used one frame after the compressed mode frames.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Uplink Delta Eb/No after			Enumerated (-6..+10dB)	Step 0.1 dB.

### 9.2.2.49 UL DPCCH Slot Format

Indicates the slot format used in DPCCH in UL, according to 25.211

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL DPCCH slot format			INTEGER (0..5)	

### 9.2.2.50 UL Eb/No

The UL Eb/No indicates a received UL Eb/No.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
UL Eb/No			INTEGER (0..255)	Resolution is 0.1 dB, range 0-25.5 dB.

### 9.2.2.51 UL Scrambling Code

The UL Scrambling Code is the scrambling code used by UE. Every UE has its specific UL Scrambling Code.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
<b>UL scrambling code</b>				
UL scrambling code number	M		INTEGER (0.. 2 <sup>24</sup> -1)	
UL scrambling code length	M		ENUMERATED(Short, Long)	

## 9.2.3 TDD specific Parameters

### 9.2.3.1 Burst Type

The Burst Type as described in TS25.221.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Burst Type			ENUMERATED (Type1, Type2)	

### 9.2.3.2 CCTrCH ID

The CCTrCH ID identifies unambiguously a CCTrCH inside a Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
CCTrCH ID			INTEGER (0..15)	

### 9.2.3.3 Cell Parameter ID

The Cell Parameter ID identifies unambiguously the Code Groups, Scrambling Codes, Midambles and Toffset (see table 9 of TS25.223)

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Cell Parameter ID			INTEGER (0..127)	

### 9.2.3.4 DPCH ID

The DPCH ID identifies unambiguously a DPCH inside a Radio Link.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
DPCH ID	M		INTEGER (0..239)	

### 9.2.3.5 Max PRACH Midamble shift

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Max PRACH Midamble Shifts			ENUMERATED (4, 8)	

### 9.2.3.6 Midamble shift

Different bursts transmitted simultaneously, using the same midamble code shall use different Midamble Shifts.

The 256 chip midamble supports 3 different time shifts, the 512 chips midamble may support 8 or even 16 time shifts.

The range of this parameter is 0 .. 15 for long midamble and 0 .. 2 for short midamble.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Midamble Shift			INTEGER (0..15)	

### 9.2.3.7 Paging Indicator Length

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Paging Indicator Length			INTEGER (2 4 8)	number of symbols in the page indicator / see TS25.221

### 9.2.3.8 PCCPCH Power

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
PCCPCH Power			INTEGER(-15..+40dBm)	Unit 0.1dBm

### 9.2.3.9 PRACH Midamble

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
PRACH Midamble			ENUMERATED (Inverted, Direct)	

### 9.2.3.10 PSCH Time Slot

The PSCH Time Slot is only applicable if the value of Sync Case IE is Case 2 or 3.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
PSCH Time Slot			INTEGER(0..6)	

### 9.2.3.11 PSCH Power

PSCH power is the power that should be used for transmitting the Physical Synch Channel in a cell. Primary sequence (Primary SCH) and secondary sequences (Secondary SCH) are superimposed for transmission.

Relation of TX power between Primary and Secondary is fixed, thus only one value is to be configured.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
PSCH Power			Integer (0..511)	

### 9.2.3.12 Repetition Length

The Repetition Length represents the number of consecutive Radio Frames inside a Repetition Period in which the same Time Slot is assigned to the same Physical Channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Repetition Length			INTEGER(1..63)	

### 9.2.3.13 Repetition Period

The Repetition Period represents the number of consecutive Radio Frames after which the same assignment scheme of Time Slots to a Physical Channel is repeated. This means that if the Time Slot  $K$  is assigned to a physical channel in the Radio Frame  $J$ , it is assigned to the same physical channel also in all the Radio Frames  $J+n \times \text{Repetition Period}$  (where  $n$  is an integer).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Repetition Period			ENUMERATED(1,2,4,8,16,32,64)	

### 9.2.3.14 Sync case

The PSCH and PCCPCH are mapped on one or two downlink slots per frame. There are three cases of PSCH and PCCPCH allocation as follows:

Case 1) PSCH and PCCPCH allocated in a single TS#k

Case 2) PSCH in two TS and PCCPCH in the same two TS: TS#k and TS#k+8

Case 3) PSCH in two TS, TS#k and TS#k+8, and the PCCPCH in TS#i, pointed by PSCH.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Sync Case			Integer (1..3)	

### 9.2.3.15 Synchronisation method

This parameter indicates which synchronisation method shall be applied.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Synchronisation Method			ENUMERATED (ExternalReference, LockedToMaster Cell, One Time Synchronisation)	

### 9.2.3.16 TDD Channelisation Code

The Channelisation Code Number indicates which Channelisation Code is used for a given Physical Channel. In TDD the Channelisation Code is an Orthogonal Variable Spreading Factor code, that can have a spreading factor of 1, 2, 4, 8 or 16.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Channelisation Code			ENUMERATED ((1/1), (2/1), (2/2), (4/1),...,(4/4), (8/1), (8/8), (16/1)...,(16/16))	

### 9.2.3.17 TDD Chip Offset

The Chip Offset Adjustment represent the timing adjustment to be applied to achieve frame synchronisation.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Chip Offset			INTEGER (-19200..+19199)	Chip

### 9.2.3.18 TDD Physical Channel Offset

The Offset represents the phase information for the allocation of a physical channel. (SFN mod Repetition Period = Offset).

IE/Group Name	Presence	Range	IE type and reference	Semantics description
TDD Physical Channel Offset			INTEGER (0..63)	

### 9.2.3.19 TDD S-CCPCH Offset

The Secondary CCPCH offset is defined as the time offset towards the Primary CCPCH in the cell.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
TDD S-CCPCH Offset			INTEGER(0.. 63)	

### 9.2.3.20 TFCI Coding

The TFCI Coding describes the way how the TFCI bits are coded. By default 1 TFCI bit is coded with 4 bits, 2 TFCI bits are coded with 8 bits, 3-5 TFCI bits are coded with 16 bits and 6-10 TFCI bits are coded with 32 bits.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
TFCI Coding			Enumerated (4, 8, 16, 32)	

### 9.2.3.21 Time Slot

The Time Slot represents the minimum time interval inside a Radio Frame that can be assigned to a Physical Channel.

IE/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot			INTEGER (0..14)	

### 9.2.3.22 Time Slot Direction

This parameter indicates whether the TS in the cell is used in Uplink or Downlink direction.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot Direction			Enumerated (UL, DL)	

### 9.2.3.23 Time Slot Status

This parameter indicates whether the TS in the cell is active or not.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Time Slot Status			Enumerated (active, notActive)	

### 9.2.3.24 Transmission Diversity Applied

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
Transmission Diversity Applied			Boolean	

### 9.2.3.25 USCH ID

The USCH ID uniquely identifies a USCH within a Node B Communication Context.

Information Element/Group Name	Presence	Range	IE type and reference	Semantics description
USCH ID			INTEGER (0..255)	

## 9.3 Message and Information element abstract syntax (with ASN.1)

This chapter is for the time being only **INFORMATIVE**.

In case of misalignment with the tabular format of the messages in chapter 9.1 the ASN.1 needs to be aligned with the tabular format.

The setting of the criticality field and the level on which criticality is set for the IEs and sequences of IEs is still to be decided upon.

### 9.3.1 Usage of protocol extension mechanism for non-standard use

The protocol extension mechanism for non-standard use may be used

- For special operator- (and/or vendor) specific features considered not to be part of the basic functionality, i.e. the functionality required for a complete and high-quality specification in order to guarantee multi-vendor inter-operability.
- By vendors for research purposes, e.g. to implement and evaluate new algorithms/features before such features are proposed for standardisation

The extension mechanism shall not be used for basic functionality. Such functionality shall be standardised.

### 9.3.2 PDU Description for NBAP

```
-- ****
-- Elementary Procedure definitions
--
-- ****
NBAP-ELEMENTARY-PROCEDUREoptions -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- ****
-- IE parameter types from other modules.
--
-- ****

IMPORTS
    Criticality,
    ProcedureID,
    MessageDiscriminator,
    TransactionID
FROM NBAP-CommonDataTypes
```

```
CommonTransportChannelSetupRequestFDD,  
CommonTransportChannelSetupRequestTDD,  
CommonTransportChannelSetupResponse,  
CommonTransportChannelSetupFailure,  
CommonTransportChannelReconfigurationRequestFDD,  
CommonTransportChannelReconfigurationRequestTDD,  
CommonTransportChannelReconfigurationResponse,  
CommonTransportChannelReconfigurationFailure,  
CommonTransportChannelDeletionRequest,  
CommonTransportChannelDeletionResponse,  
BlockResourceRequest,  
BlockResourceResponse,  
BlockResourceFailure,  
UnblockResourceIndication,  
AuditRequiredIndication,  
AuditRequest,  
AuditResponse,  
CommonMeasurementInitiationRequest,  
CommonMeasurementInitiationResponse,  
CommonMeasurementInitiationFailure,  
CommonMeasurementTerminationRequest,  
CommonMeasurementFailureIndication,  
CommonMeasurementReport,  
CellSetupRequestFDD,  
CellSetupRequestTDD,  
CellSetupResponse,  
CellSetupFailure,  
CellReconfigurationRequestFDD,  
CellReconfigurationRequestTDD,  
CellReconfigurationResponse,  
CellReconfigurationFailure,  
CellDeletionRequest,  
CellDeletionResponse,  
ResourceStatusIndication,  
SystemInformationUpdateRequest,  
SystemInformationUpdateResponse,  
SystemInformationUpdateFailure,  
RadioLinkSetupRequestFDD,  
RadioLinkSetupResponseFDD,  
RadioLinkSetupFailureFDD,  
RadioLinkSetupRequestTDD,  
RadioLinkSetupResponseTDD,  
RadioLinkSetupFailureTDD,  
NeighbourCellMeasurementRequestTDD,  
NeighbourCellMeasurementResponseTDD,  
NeighbourCellMeasurementFailureTDD,  
SynchronisationAdjustmentRequestTDD,  
SynchronisationAdjustmentResponseTDD,  
SynchronisationAdjustmentFailureTDD,  
NodeBOutOfSyncIndicationTDD,
```

```
SynchronisationRestartRequestTDD,  
RadioLinkAdditionRequestFDD,  
RadioLinkAdditionResponseFDD,  
RadioLinkAdditionFailureFDD,  
RadioLinkAdditionRequestTDD,  
RadioLinkAdditionResponseTDD,  
RadioLinkAdditionFailureTDD,  
RadioLinkReconfigurationPrepareFDD,  
RadioLinkReconfigurationPrepareTDD,  
RadioLinkReconfigurationReady,  
RadioLinkReconfigurationCommit,  
RadioLinkReconfigurationFailure,  
RadioLinkReconfigurationCancel,  
RadioLinkReconfigurationRequestFDD,  
RadioLinkReconfigurationRequestTDD,  
RadioLinkReconfigurationResponse,  
RadioLinkDeletionRequest,  
RadioLinkDeletionResponse,  
DLPowerControlRequestFDD,  
DedicatedMeasurementInitiationRequest,  
DedicatedMeasurementInitiationResponse,  
DedicatedMeasurementInitiationFailure,  
DedicatedMeasurementTerminationRequest,  
DedicatedMeasurementFailureIndication,  
DedicatedMeasurementReport,  
RadioLinkFailureIndication,  
RadioLinkRestoreIndication,  
CompressedModePrepareFDD,  
CompressedModeReadyFDD,  
CompressedModeCommitFDD,  
CompressedModeFailureFDD,  
CompressedModeCancelFDD,  
ErrorIndication  
FROM NBAP-PDU-Contents  
  
id-audit,  
id-auditRequired,  
id-blockResource,  
id-cellDeletion,  
id-cellReconfiguration,  
id-cellSetup,  
id-commonMeasurementFailure,  
id-commonMeasurementInitiation,  
id-commonMeasurementReport,  
id-commonMeasurementTermination,  
id-commonTransportChannelDeletion,  
id-commonTransportChannelReconfiguration,  
id-commonTransportChannelSetup,  
id-compressedModeControlCancellation,  
id-compressedModeControlCommit,  
id-compressedModeControlPreparation,
```

```

id-dedicatedMeasurementFailure,
id-dedicatedMeasurementInitiation,
id-dedicatedMeasurementReport,
id-dedicatedMeasurementTermination,
id-dlPowerControl,
id-neighbourCellMeasurement,
id-radioLinkAddition,
id-radioLinkDeletion,
id-radioLinkFailure,
id-radioLinkReconfigurationCommit,
id-radioLinkReconfigurationCancel,
id-radioLinkRestoration,
id-radioLinkSetup,
id-resourceStatusIndication,
id-synchronisationAdjustment,
id-synchronisationFailure,
id-synchronisationRestart,
id-synchronisedRadioLinkReconfigurationPreparation,
id-systemInformationUpdate,
id-unblockResource,
id-unsynchronisedRadioLinkReconfiguration

```

```
FROM NBAP-Constants;
```

```

-- *****
-- 
-- Interface Elementary Procedure Class
-- 
-- *****

NBAP-ELEMENTARY-PROCEDURE ::= CLASS {
  &InitiatingMessage           ,
  &SuccessfulOutcome          OPTIONAL,
  &UnsuccessfulOutcome        OPTIONAL,
  &Outcome                     OPTIONAL,
  &messageDiscriminator       MessageDiscriminator,
  &procedureID                ProcedureID      UNIQUE,
  &criticality                Criticality      DEFAULT ignore
}
WITH SYNTAX {
  INITIATING MESSAGE    &InitiatingMessage
  [ SUCCESSFUL OUTCOME   &SuccessfulOutcome]
  [ UNSUCCESSFUL OUTCOME &UnsuccessfulOutcome]
  [ OUTCOME              &Outcome]
  MESSAGE DISCRIMINATOR  &messageDiscriminator
  PROCEDURE ID           &procedureID
  [ CRITICALITY          &criticality]
}

-- *****
-- 

```

```

-- Interface PDU Definition
--
-- ****
NBAP-PDU ::= CHOICE {
    initiatingMessage      InitiatingMessage,
    succesfulOutcome       SuccessfulOutcome,
    unsuccesfulOutcome     UnsuccessfulOutcome,
    outcome                Outcome,
    ...
}

InitiatingMessage ::= SEQUENCE {
    procedureID      NBAP-ELEMENTARY-PROCEDURE.&procedureID  ({NBAP-ELEMENTARY-PROCEDURES}),
    criticality      NBAP-ELEMENTARY-PROCEDURE.&criticality   ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    messageDiscriminator  NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator
                           ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    transactionID    TransactionID,
    value             NBAP-ELEMENTARY-PROCEDURE.&InitiatingMessage
                      ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID})
}

SuccessfulOutcome ::= SEQUENCE {
    procedureID      NBAP-ELEMENTARY-PROCEDURE.&procedureID  ({NBAP-ELEMENTARY-PROCEDURES}),
    criticality      NBAP-ELEMENTARY-PROCEDURE.&criticality   ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    messageDiscriminator  NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator
                           ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    transactionID    TransactionID,
    value             NBAP-ELEMENTARY-PROCEDURE.&SuccessfulOutcome
                      ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID})
}

UnsuccessfulOutcome ::= SEQUENCE {
    procedureID      NBAP-ELEMENTARY-PROCEDURE.&procedureID  ({NBAP-ELEMENTARY-PROCEDURES}),
    criticality      NBAP-ELEMENTARY-PROCEDURE.&criticality   ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    messageDiscriminator  NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator
                           ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    transactionID    TransactionID,
    value             NBAP-ELEMENTARY-PROCEDURE.&UnsuccessfulOutcome
                      ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID})
}

Outcome ::= SEQUENCE {
    procedureID      NBAP-ELEMENTARY-PROCEDURE.&procedureID  ({NBAP-ELEMENTARY-PROCEDURES}),
    criticality      NBAP-ELEMENTARY-PROCEDURE.&criticality   ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    messageDiscriminator  NBAP-ELEMENTARY-PROCEDURE.&messageDiscriminator
                           ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID}),
    transactionID    TransactionID,
    value             NBAP-ELEMENTARY-PROCEDURE.&Outcome   ({NBAP-ELEMENTARY-PROCEDURES}{@procedureID})
}

```

```
-- ****
-- Interface Elementary Procedure List
-- ****

NBAP-ELEMENTARY-PROCEDURES NBAP-ELEMENTARY-PROCEDURE ::= {
    NBAP-ELEMENTARY-PROCEDURES-CLASS-1           |
    NBAP-ELEMENTARY-PROCEDURES-CLASS-2           ,
    ...
}

NBAP-ELEMENTARY-PROCEDURES-CLASS-1 NBAP-ELEMENTARY-PROCEDURE ::= {
    commonTransportChannelSetupFDD                |
    commonTransportChannelSetupTDD                |
    commonTransportChannelReconfigurationFDD     |
    commonTransportChannelReconfigurationTDD     |
    commonTransportChannelDeletion                |
    blockResource                                |
    audit                                       |
    commonMeasurementInitiation                 |
    cellSetupFDD                                 |
    cellSetupTDD                                |
    cellReconfigurationFDD                      |
    cellReconfigurationTDD                      |
    cellDeletion                                 |
    systemInformationUpdate                     |
    radioLinkSetupFDD                           |
    radioLinkSetupTDD                           |
    neighbourCellMeasurementTDD                |
    synchronisationAdjustmentTDD               |
    radioLinkAdditionFDD                        |
    radioLinkAdditionTDD                        |
    radioLinkReconfigurationCommit             |
    radioLinkReconfigurationCancellation       |
    radioLinkDeletion                           |
    dedicatedMeasurementInitiation            |
    compressedModeControlPreparationFDD        ,
    ...
}

NBAP-ELEMENTARY-PROCEDURES-CLASS-2 NBAP-ELEMENTARY-PROCEDURE ::= {
    unblockResource                            |
    auditRequired                            |
    commonMeasurementTermination            |
    commonMeasurementFailure              |
    commonMeasurementReport                |
    resourceStatusIndication             |
    synchronisationFailureTDD            |
    synchronisationRestartTDD            |
}
```

```

synchronisedRadioLinkReconfigurationPreparationFDD      |
synchronisedRadioLinkReconfigurationPreparationTDD    |
unsynchronisedRadioLinkReconfigurationFDD             |
unsynchronisedRadioLinkReconfigurationTDD             |
dlPowerControlFDD                                    |
dedicatedMeasurementTermination                    |
dedicatedMeasurementFailure                       |
dedicatedMeasurementReport                        |
radioLinkFailure                                  |
radioLinkRestoration                            |
compressedModeControlCommitFDD                  |
compressedModeControlCancellationFDD            |
errorIndication                                ,
...
}

-- *****
-- 
-- Interface Elementary Procedures
-- 
-- *****

-- Class 1

-- *** CommonTransportChannelSetup (FDD) ***
commonTransportChannelSetupFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CommonTransportChannelSetupRequestFDD
  SUCCESSFUL OUTCOME CommonTransportChannelSetupResponse
  UNSUCCESSFUL OUTCOME CommonTransportChannelSetupFailure
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID        { procedureCode id-commonTransportChannelSetup, ddMode fdd }
  CRITICALITY        ignore
}

-- *** CommonTransportChannelSetup (TDD) ***
commonTransportChannelSetupTDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CommonTransportChannelSetupRequestTDD
  SUCCESSFUL OUTCOME CommonTransportChannelSetupResponse
  UNSUCCESSFUL OUTCOME CommonTransportChannelSetupFailure
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID        { procedureCode id-commonTransportChannelSetup, ddMode tdd }
  CRITICALITY        ignore
}

-- *** CommonTransportChannelReconfiguration (FDD) ***
commonTransportChannelReconfigurationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
  INITIATING MESSAGE CommonTransportChannelReconfigurationRequestFDD
  SUCCESSFUL OUTCOME CommonTransportChannelReconfigurationResponse
  UNSUCCESSFUL OUTCOME CommonTransportChannelReconfigurationFailure
  MESSAGE DISCRIMINATOR common
  PROCEDURE ID        { procedureCode id-commonTransportChannelReconfiguration, ddMode fdd }
}

```

```

    CRITICALITY      ignore
}

-- *** CommonTransportChannelReconfiguration (TDD) ***
commonTransportChannelReconfigurationTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CommonTransportChannelReconfigurationRequestTDD
    SUCCESSFUL OUTCOME CommonTransportChannelReconfigurationResponse
    UNSUCCESSFUL OUTCOME CommonTransportChannelReconfigurationFailure
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID       { procedureCode id-commonTransportChannelReconfiguration, ddMode tdd }
    CRITICALITY      ignore
}

-- *** CommonTransportChannelDeletionRequest ***
commonTransportChannelDeletion NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CommonTransportChannelDeletionRequest
    SUCCESSFUL OUTCOME CommonTransportChannelDeletionResponse
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID       { procedureCode id-commonTransportChannelDeletion, ddMode common }
    CRITICALITY      ignore
}

-- ****
-- *** BlockResourceRequest ***
blockResource NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE BlockResourceRequest
    SUCCESSFUL OUTCOME BlockResourceResponse
    UNSUCCESSFUL OUTCOME BlockResourceFailure
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID       { procedureCode id-blockResource, ddMode common }
    CRITICALITY      ignore
}

-- *** UnblockResourceIndication ***
unblockResource NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE UnblockResourceIndication
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID       { procedureCode id-unblockResource, ddMode common }
    CRITICALITY      ignore
}

-- ****
-- *** AuditRequired ***
auditRequired NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE AuditRequiredIndication
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID       { procedureCode id-auditRequired, ddMode common }
    CRITICALITY      ignore
}

-- *** Audit ***

```

```

audit NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE AuditRequest
    SUCCESSFUL OUTCOME AuditResponse
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID      { procedureCode id-audit, ddMode common }
    CRITICALITY      ignore
}

-- *****
-- *** CommonMeasurementInitiation ***
commonMeasurementInitiation NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CommonMeasurementInitiationRequest
    SUCCESSFUL OUTCOME CommonMeasurementInitiationResponse
    UNSUCCESSFUL OUTCOME CommonMeasurementInitiationFailure
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID      { procedureCode id-commonMeasurementInitiation, ddMode common }
    CRITICALITY      ignore
}

-- *** CommonMeasurementTermination ***
commonMeasurementTermination NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CommonMeasurementTerminationRequest
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID      { procedureCode id-commonMeasurementTermination, ddMode common }
    CRITICALITY      ignore
}

-- *** CommonMeasurementFailure ***
commonMeasurementFailure NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CommonMeasurementFailureIndication
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID      { procedureCode id-commonMeasurementFailure, ddMode common }
    CRITICALITY      ignore
}

-- *** CommonMeasurementReport ***
commonMeasurementReport NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CommonMeasurementReport
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID      { procedureCode id-commonMeasurementReport, ddMode common }
    CRITICALITY      ignore
}

-- *****
-- *** CellSetup (FDD) ***
cellSetupFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CellSetupRequestFDD
    SUCCESSFUL OUTCOME CellSetupResponse
    UNSUCCESSFUL OUTCOME CellSetupFailure
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID      { procedureCode id-cellSetup, ddMode fdd }
}

```

```

    CRITICALITY      ignore
}

-- *** CellSetup (TDD) ***
cellSetupTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CellSetupRequestTDD
    SUCCESSFUL OUTCOME CellSetupResponse
    UNSUCCESSFUL OUTCOME CellSetupFailure
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID       { procedureCode id-cellSetup, ddMode tdd }
    CRITICALITY      ignore
}

-- *** CellReconfiguration(FDD) ***
cellReconfigurationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CellReconfigurationRequestFDD
    SUCCESSFUL OUTCOME CellReconfigurationResponse
    UNSUCCESSFUL OUTCOME CellReconfigurationFailure
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID       { procedureCode id-cellReconfiguration, ddMode fdd }
    CRITICALITY      ignore
}

-- *** CellReconfiguration(TDD) ***
cellReconfigurationTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CellReconfigurationRequestTDD
    SUCCESSFUL OUTCOME CellReconfigurationResponse
    UNSUCCESSFUL OUTCOME CellReconfigurationFailure
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID       { procedureCode id-cellReconfiguration, ddMode tdd }
    CRITICALITY      ignore
}

-- *** CellDeletion ***
cellDeletion NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CellDeletionRequest
    SUCCESSFUL OUTCOME CellDeletionResponse
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID       { procedureCode id-cellDeletion, ddMode common }
    CRITICALITY      ignore
}

-- **** ResourceStatusIndication ***
resourceStatusIndication NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE ResourceStatusIndication
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID       { procedureCode id-resourceStatusIndication, ddMode common }
    CRITICALITY      ignore
}

```

```

-- *****
-- *** SystemInformationUpdate ***
systemInformationUpdate NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE SystemInformationUpdateRequest
    SUCCESSFUL OUTCOME SystemInformationUpdateResponse
    UNSUCCESSFUL OUTCOME SystemInformationUpdateFailure
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID      { procedureCode id-systemInformationUpdate, ddMode common }
    CRITICALITY      ignore
}

-- *****
-- *** RadioLinkSetup (FDD) ***
radioLinkSetupFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkSetupRequestFDD
    SUCCESSFUL OUTCOME RadioLinkSetupResponseFDD
    UNSUCCESSFUL OUTCOME RadioLinkSetupFailureFDD
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID      { procedureCode id-radioLinkSetup, ddMode fdd }
    CRITICALITY      ignore
}

-- *** RadioLinkSetup (TDD) ***
radioLinkSetupTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkSetupRequestTDD
    SUCCESSFUL OUTCOME RadioLinkSetupResponseTDD
    UNSUCCESSFUL OUTCOME RadioLinkSetupFailureTDD
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID      { procedureCode id-radioLinkSetup, ddMode tdd }
    CRITICALITY      ignore
}

-- *****
-- *** NeighbourCellMeasurement (TDD only) ***
neighbourCellMeasurementTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE NeighbourCellMeasurementRequestTDD
    SUCCESSFUL OUTCOME NeighbourCellMeasurementResponseTDD
    UNSUCCESSFUL OUTCOME NeighbourCellMeasurementFailureTDD
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID      { procedureCode id-neighbourCellMeasurement, ddMode tdd }
    CRITICALITY      ignore
}

-- *****
-- *** SynchronisationAdjustment (TDD only) ***
synchronisationAdjustmentTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE SynchronisationAdjustmentRequestTDD
    SUCCESSFUL OUTCOME SynchronisationAdjustmentResponseTDD
    UNSUCCESSFUL OUTCOME SynchronisationAdjustmentFailureTDD
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID      { procedureCode id-synchronisationAdjustment, ddMode tdd }
    CRITICALITY      ignore
}

```

```

-- *** NodeBOutOfSyncIndication (TDD only) ***
synchronisationFailureTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE NodeBOutOfSyncIndicationTDD
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID      { procedureCode id-synchronisationFailure, ddMode tdd }
    CRITICALITY      ignore
}

-- *** SynchronisationRestart (TDD only) ***
synchronisationRestartTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE SynchronisationRestartRequestTDD
    MESSAGE DISCRIMINATOR common
    PROCEDURE ID      { procedureCode id-synchronisationRestart, ddMode tdd }
    CRITICALITY      ignore
}

-- ****
-- *** RadioLinkAddition (FDD) ***
radioLinkAdditionFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkAdditionRequestFDD
    SUCCESSFUL OUTCOME RadioLinkAdditionResponseFDD
    UNSUCCESSFUL OUTCOME RadioLinkAdditionFailureFDD
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-radioLinkAddition, ddMode fdd }
    CRITICALITY      ignore
}

-- *** RadioLinkAddition (TDD) ***
radioLinkAdditionTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkAdditionRequestTDD
    SUCCESSFUL OUTCOME RadioLinkAdditionResponseTDD
    UNSUCCESSFUL OUTCOME RadioLinkAdditionFailureTDD
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-radioLinkAddition, ddMode tdd }
    CRITICALITY      ignore
}

-- *** RadioReconfigururationPrepare (FDD) ***
synchronisedRadioLinkReconfigurationPreparationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkReconfigurationPrepareFDD
    SUCCESSFUL OUTCOME RadioLinkReconfigurationReady
    UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-synchronisedRadioLinkReconfigurationPreparation, ddMode fdd }
    CRITICALITY      ignore
}

-- *** RadioReconfigururationPrepare (TDD) ***
synchronisedRadioLinkReconfigurationPreparationTDD NBAP-ELEMENTARY-PROCEDURE ::= {

```

```

INITIATING MESSAGE RadioLinkReconfigurationPrepareTDD
SUCCESSFUL OUTCOME RadioLinkReconfigurationReady
UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure
MESSAGE DISCRIMINATOR dedicated
PROCEDURE ID      { procedureCode id-synchronisedRadioLinkReconfigurationPreparation, ddMode tdd }
CRITICALITY      ignore
}

-- *** (FDD) ***
unsynchronisedRadioLinkReconfigurationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkReconfigurationRequestFDD
    SUCCESSFUL OUTCOME RadioLinkReconfigurationResponse
    UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-unsynchronisedRadioLinkReconfiguration, ddMode fdd }
    CRITICALITY      ignore
}
-- *** (TDD) ***
unsynchronisedRadioLinkReconfigurationTDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkReconfigurationRequestTDD
    SUCCESSFUL OUTCOME RadioLinkReconfigurationResponse
    UNSUCCESSFUL OUTCOME RadioLinkReconfigurationFailure
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-unsynchronisedRadioLinkReconfiguration, ddMode tdd }
    CRITICALITY      ignore
}

-- *** RadioLinkReconfigurationCommit ***
radioLinkReconfigurationCommit NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkReconfigurationCommit
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-radioLinkReconfigurationCommit, ddMode common }
    CRITICALITY      ignore
}

-- *** RadioReconfigurationCancellation ***
radioLinkReconfigurationCancellation NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkReconfigurationCancel
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-radioLinkReconfigurationCancel, ddMode common }
    CRITICALITY      ignore
}

-- *** RadioLinkDeletion ***
radioLinkDeletion NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkDeletionRequest
    SUCCESSFUL OUTCOME RadioLinkDeletionResponse
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-radioLinkDeletion, ddMode common }
    CRITICALITY      ignore
}

```

```

}

-- *****
-- *** DLPowerControl (FDD only) ***
dlPowerControlFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE DLPowerControlRequestFDD
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-dlPowerControl, ddMode fdd }
    CRITICALITY      ignore
}

-- *****
-- *** DedicatedMeasurementInitiation ***
dedicatedMeasurementInitiation NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE DedicatedMeasurementInitiationRequest
    SUCCESSFUL OUTCOME DedicatedMeasurementInitiationResponse
    UNSUCCESSFUL OUTCOME DedicatedMeasurementInitiationFailure
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-dedicatedMeasurementInitiation, ddMode common }
    CRITICALITY      ignore
}

-- *** DedicatedMeasurementTermination ***
dedicatedMeasurementTermination NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE DedicatedMeasurementTerminationRequest
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-dedicatedMeasurementTermination, ddMode common }
    CRITICALITY      ignore
}

-- *** DedicatedMeasurementFailure ***
dedicatedMeasurementFailure NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE DedicatedMeasurementFailureIndication
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-dedicatedMeasurementFailure, ddMode common }
    CRITICALITY      ignore
}

-- *** DedicatedMeasurementReport ***
dedicatedMeasurementReport NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE DedicatedMeasurementReport
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-dedicatedMeasurementReport, ddMode common }
    CRITICALITY      ignore
}

-- *****
-- *** RadioLinkFailureIndication ***
radioLinkFailure NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkFailureIndication
    MESSAGE DISCRIMINATOR dedicated
}

```

```

PROCEDURE ID      { procedureCode id-radioLinkFailure, ddMode common }
CRITICALITY     ignore
}

-- *** RadioLinkRestoreIndication ***
radioLinkRestoration NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE RadioLinkRestoreIndication
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-radioLinkRestoration, ddMode common }
    CRITICALITY     ignore
}

-- ****
-- *** CompressedModePrepare (FDD only) ***
compressedModeControlPreparationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CompressedModePrepareFDD
    SUCCESSFUL OUTCOME CompressedModeReadyFDD
    UNSUCCESSFUL OUTCOME CompressedModeFailureFDD
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-compressedModeControlPreparation, ddMode fdd }
    CRITICALITY     ignore
}

-- *** CompressedModeCommit (FDD only) ***
compressedModeControlCommitFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CompressedModeCommitFDD
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-compressedModeControlCommit, ddMode fdd }
    CRITICALITY     ignore
}

-- *** CompressedModeCommit (FDD only) ***
compressedModeControlCancellationFDD NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE CompressedModeCancelFDD
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id-compressedModeControlCancellation, ddMode fdd }
    CRITICALITY     ignore
}

-- *** ErrorIndication ***
errorIndication NBAP-ELEMENTARY-PROCEDURE ::= {
    INITIATING MESSAGE errorIndication
    MESSAGE DISCRIMINATOR dedicated
    PROCEDURE ID      { procedureCode id- errorIndication Cancellation, ddMode common }
    CRITICALITY     ignore
}

```

END

### 9.3.3 NBAP PDU Content Definitions

```
-- ****
-- PDU definitions for NBAP.
--
-- ****

NBAP-PDU-Contents -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- ****
-- IE parameter types from other modules.
--
-- ****

IMPORTS
    AICH-InformationList,
    AICH-Parameters,
    AICH-Power,
    AICH-TransmissionTiming,
    AddOrDeleteIndicator,
    AvailabilityStatus,
    BindingID,
    BlockingPriorityIndicator,
    BurstType,
    CCTrCH-ID,
    CFN,
    CN-CSDomainIdentifier,
    CN-PSDomainIdentifier,
    CRNC-CommunicationContextID,
    Cause,
    CellParameter,
    Cell-Parameter,
    ChipOffset,
    CommonMeasurementType,
    CommonPhysicalChannelID,
    CommonPhysicalChannelType,
    CommonTransportChannelID,
    CommonTransportChannelType,
    CommunicationControlPortID,
    CommunicationControlPortInformationList,
    CompressesModeMethod,
    ConfigurationGenerationID,
    DCH-CombinationIndication,
    DCH-Delete-RL-ReconfReqTDDItem,
    DCH-ID,
```

DCH-InformationResponse-RL-setupResFDD,  
DCH-Modify-RL-ReconfPrepTDDItem,  
DL-CCTrCH-ID,  
DL-CodeInformation,  
DL-DPCH-InformationItem-RL-ReconfReqFDD,  
DL-DPCH-SlotFormat,  
DL-FrameType,  
DL-Power,  
DL-ReferencePower,  
DL-ReferencePowerInformationItem,  
DL-ScramblingCode,  
DPCH-ID,  
DPCH-Offset,  
DSCH-ID,  
DSCH-InformationResponse-RL-setupResFDD,  
DSCH-ModifyList-RL-ReconfResp,  
DSCH-SetupList-RL-ReconfResp,  
DSCH-TransportFormatSet,  
DTX-InsertionPoint,  
DTX-InsertionPosition,  
D-FieldLength,  
DedicatedMeasurementType,  
DedicatedMeasurementValue,  
DeltaTPC,  
DiversityControlField,  
DiversityMode,  
FACH-Power,  
FDD-DL-ChannelisationCodeNumber,  
FDD-SCCPCH-Offset,  
FrameHandlingPriority,  
FrameOffset,  
GapStartingSlotNumber,  
LocalCellID,  
LocalCellInformationList,  
LocalCell-ID,  
Local-CellID,  
MIB-SG-POS,  
MIB-SG-REP,  
MaxFACH-Power,  
MaxNrOfUL-DPDCHs,  
MaxNumberOfUL-DPDCHs,  
MaximumDLPowerCapability,  
MaximumDL-PowerCapability,  
MaximumTransmissionPower,  
MaximumUL-EbN0,  
Maximum-DL-PowerCapability,  
MeasuredCellInfo,  
MeasurementCharacteristics,  
MeasurementID,  
MeasurementType,  
MessagePartScramblingCode,

MidambleShift,  
Midambleshift,  
MinUL-ChannelisationCodeLength,  
MinimumSpreadingFactor,  
MinimumUL-EbN0,  
NodeB-CommunicationContextID,  
NumberOfChannelElements,  
Offset,  
PCCPCH-Power,  
PCCPCH-TimeSloti,  
PCH-Power,  
PICH-Information,  
PICH-Power,  
PSCH-Power,  
PSCHandPCCPCH-Allocation,  
PSCHandPCCPCH-TimeSlotK,  
PUSCH,  
PagingIndicatorLength,  
PatternDuration,  
PayloadCRC-PresenceIndicator,  
PilotBitsUsedIndicator,  
PowerControlMode,  
PowerOffset,  
PowerResumeMode,  
PreambleScramblingCode,  
PreambleSignatures,  
PrimaryCPICH-Power,  
PrimarySCH-Power,  
PrimaryScramblingCode,  
Primary-ScramblingCode,  
PropagationDelay,  
PunctureLimit,  
RACH-SlotFormat,  
RACH-SubChannelNumbers,  
RLC-Mode,  
RL-ID,  
RL-Information,  
RL-InformationItem,  
RL-InformationItem-RL-SetupReqTDD,  
RL-InformationList-DMeasureRequest,  
RL-ReconfigurationFailure-RL-ReconfFailItem,  
RadioLinkInformation-RL-ReconfReqTDD,  
RepetitionLength,  
RepetitionPeriod,  
ReportCharacteristics,  
ResourceOperationState,  
ResourceOperationalState,  
SAI,  
SFN,  
SIB-SG-POS,  
SIB-SG-REP,

```
SSDT-CellIdentity,
SSDT-CellIdentityLength,
SSDT-Cell-IDLength,
SSDT-Indication,
SSDT-SupportIndicator,
STD-Indicator,
S-CCPCH-Offset,
S-CCPCH-Power,
S-FieldLength,
ScramblingCode,
ScramblingCodeChange,
SecondaryCCPCH-SlotFormat,
SecondaryCPICH-Power,
SecondarySCH-Power,
ShutdownTimer,
SynchronisationMethod,
TDDChipOffset,
TDD-ChannelisationCode,
TFCI-Presence,
TFCI-SignallingMode,
TFCS,
TSTD-Indicator,
T-Cell,
TimeSlot,
TimeSlotDirection,
TimeSlotStatus,
ToAWE,
ToAWS,
TransmissionGapDistance,
TransmissionGapPeriod,
TransmitGapLength,
TransmitGapPositionMode,
TransportFormatCombinationSet,
TransportFormatSet,
TransportLayerAddress,
UARFCN,
C-ID,
UL-CCTrCHInformation,
UL-CCTrCH-ID,
UL-DPCCH-SlotFormat,
UL-FP-Mode,
UL-InterferenceLevel,
UL-PunctureLimit,
UL-ScramblingCode,
UplinkEbNo
FROM NBAP-IES

ProtocolExtensionContainer{},
PrivateExtensionContainer{},
ProtocolIE-Container{},
ProtocolIE-ContainerList{},
```

NBAP-PROTOCOL-IES,  
NBAP-PROTOCOL-EXTENSION,  
NBAP-PRIVATE-EXTENSION  
FROM NBAP-Containers

id-AICH-Information-ResourceStatIndItem,  
id-AICH-ParametersList,  
id-AICH-ParametersListItem,  
id-AllowedSlotFormatInformationListItem-CTCHreconf-Req-FDD,  
id-AllowedSlotFormatInformationListItem-CTCHsetup-Req-FDD,  
id-BlockingPriorityIndicator,  
id-CCTrCH-ParametersList,  
id-CCTrCH-ParametersListItem,  
id-CFN,  
id-CRNC-CommunicationContextID,  
id-CRNCommunicationContextID,  
id-Cause,  
id-Cell-Information-ResourceStatIndItem,  
id-Cell-InformationItem,  
id-Cell-InformationList,  
id-Cell-Parameter,  
id-Cell-ParametersItem,  
id-Cell-ParametersList,  
id-CellParameter,  
id-CommonMeasurementObjectType,  
id-CommonMeasurementType,  
id-CommonPhysicalChannelID,  
id-CommonPhysicalChannelType-CTCHsetup-Req-FDD,  
id-CommonPhysicalChannelType-CTCHsetup-Response,  
id-CommunicationControlPort-InformationItem,  
id-CommunicationControlPortID,  
id-CommunicationControlPortInformation-ResourceStatIndItem,  
id-CommunicationControlPortInformationList,  
id-CompressesModeMethod,  
id-ConfigurationGenerationID,  
id-DCH-Add-RL-ReconfPrepFDDItem,  
id-DCH-Add-RL-ReconfPrepTDDItem,  
id-DCH-Add-RL-ReconfReadyItem,  
id-DCH-Add-RL-ReconfReqFDDItem,  
id-DCH-Add-RL-ReconfReqTDDItem,  
id-DCH-AddItem-RL-ReconfResp,  
id-DCH-AddList-RL-ReconfPrepFDD,  
id-DCH-AddList-RL-ReconfPrepTDD,  
id-DCH-AddList-RL-ReconfReqFDD,  
id-DCH-AddList-RL-ReconfReqTDD,  
id-DCH-Delete-RL-ReconfPrepFDDItem,  
id-DCH-Delete-RL-ReconfPrepTDDItem,  
id-DCH-Delete-RL-ReconfReqFDDItem,  
id-DCH-Delete-RL-ReconfReqTDDItem,  
id-DCH-DeleteList-RL-ReconfPrepFDD,  
id-DCH-DeleteList-RL-ReconfPrepTDD,

id-DCH-DeleteList-RL-ReconfReqFDD,  
id-DCH-DeleteList-RL-ReconfReqTDD,  
id-DCH-Information-RL-SetupReqFDDItem,  
id-DCH-Information-RL-SetupReqTDDItem,  
id-DCH-InformationList-RL-SetupReqFDD,  
id-DCH-InformationList-RL-SetupReqTDD,  
id-DCH-InformationResponse-RL-SetupFailFDDItem,  
id-DCH-InformationResponse-RL-setupResTDDItem,  
id-DCH-InformationResponseItem,  
id-DCH-Modify-RL-ReconfPrepFDDItem,  
id-DCH-Modify-RL-ReconfPrepTDDItem,  
id-DCH-Modify-RL-ReconfReadyItem,  
id-DCH-Modify-RL-ReconfReqFDDItem,  
id-DCH-Modify-RL-ReconfReqTDDItem,  
id-DCH-ModifyItem-RL-ReconfResp,  
id-DCH-ModifyList-RL-ReconfPrepFDD,  
id-DCH-ModifyList-RL-ReconfPrepTDD,  
id-DCH-ModifyList-RL-ReconfReqFDD,  
id-DCH-ModifyList-RL-ReconfReqTDD,  
id-DL-CCTrCH-Information-RL-ReconfPrepTDDItem,  
id-DL-CCTrCH-Information-RL-ReconfReqTDDItem,  
id-DL-CCTrCH-Information-RL-SetupReqTDDItem,  
id-DL-CCTrCH-InformationItem,  
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD,  
id-DL-CCTrCH-InformationList-RL-ReconfReqTDD,  
id-DL-CCTrCH-InformationList-RL-SetupReqTDD,  
id-DL-CCTrCHInformationItem,  
id-DL-CCTrCHInformationList,  
id-DL-CodeInformation,  
id-DL-CodeInformation-RL-ReconfPrepFDDItem,  
id-DL-CodeInformation-RL-SetupReqFDDItem,  
id-DL-DPCH-Information-RL-ReconfPrepFDD,  
id-DL-DPCH-Information-RL-ReconfPrepTDDItem,  
id-DL-DPCH-Information-RL-SetupReqTDDItem,  
id-DL-DPCH-InformationItem,  
id-DL-DPCH-InformationItem-RL-ReconfReqFDD,  
id-DL-DPCH-InformationItem-RL-SetupReqFDD,  
id-DL-FrameType,  
id-DL-ReferencePowerInformationItem,  
id-DSCH-AddItem-RL-ReconfPrepFDD,  
id-DSCH-AddItem-RL-ReconfReqFDD,  
id-DSCH-DeleteItem-RL-ReconfPrepFDD,  
id-DSCH-DeleteItem-RL-ReconfReqFDD,  
id-DSCH-ID,  
id-DSCH-Information-RL-SetupReqFDDItem,  
id-DSCH-InformationList-RL-SetupReqFDD,  
id-DSCH-InformationResponse-RL-SetupFailFDDItem,  
id-DSCH-InformationResponse-RL-setupResFDDItem,  
id-DSCH-ModifyItem-RL-ReconfPrepFDD,  
id-DSCH-ModifyItem-RL-ReconfReqFDD,  
id-DedicatedMeasurementObjectType,

id-DedicatedMeasurementType,  
id-FACH-Information-ResourceStatIndItem,  
id-FACH-InformationItem,  
id-FACH-ListItem,  
id-FACH-ParametersList-CTCHreconf-Req-FDD,  
id-FACH-ParametersList-CTCHreconf-Req-TTD,  
id-FACH-ParametersListItem-CTCHreconf-Req-FDD,  
id-FACH-ParametersListItem-CTCHreconf-Req-TTD,  
id-FACH-ParametersListItem-CTCHsetup-Req-FDD,  
id-FACH-ParametersListItem-CTCHsetup-Response,  
id-GapStartingSlotNumber,  
id-IndicationType,  
id-Local-Cell-Information-ResourceStatIndItem,  
id-Local-CellInformation-ResourceStatIndItem,  
id-LocalCell-ID,  
id-LocalCell-InformationItem,  
id-LocalCellInformationList,  
id-MIB-SegmentInformationItem,  
id-MIB-SegmentInformationList,  
id-MaximumTransmissionPower,  
id-MeasuredCellInfo,  
id-MeasurementCharacteristics,  
id-MeasurementID,  
id-MeasurementType,  
id-NeighbouringFDD-Cell-InformationItem,  
id-NeighbouringTDD-Cell-InformationItem,  
id-NodeB-CommunicationContextID,  
id-PCCPCH-Information,  
id-PCH-Information-ResourceStatIndItem,  
id-PCH-InformationItem,  
id-PCH-ListItem,  
id-PCH-Parameters-CTCHreconf-Req-FDD,  
id-PCH-ParametersList,  
id-PCH-ParametersListItem,  
id-PICH-Parameters-CTCHreconf-Req-FDD,  
id-PRACH-ParametersList,  
id-PRACH-ParametersListItem,  
id-PSCH-Information,  
id-PSCHandPCCPCH-Information,  
id-PUSCH-ListItem,  
id-PatternDuration,  
id-PowerControlMode,  
id-PowerResumeMode,  
id-PrimaryCCPCH-Information,  
id-PrimaryCPICH-Information,  
id-PrimarySCH-Information,  
id-PrimaryScramblingCode,  
id-ProcedureScopeType,  
id-RACH-Information-ResourceStatIndItem,  
id-RACH-InformationItem,  
id-RL-ID,

id-RL-Information,  
id-RL-Information-DMeasureReportItem,  
id-RL-Information-DMeasureRequestItem,  
id-RL-Information-DMeasureResponseItem,  
id-RL-Information-RL-ReconfPrepFDDItem,  
id-RL-Information-RL-SetupReqFDDItem,  
id-RL-InformationItem,  
id-RL-InformationItem-RL-SetupReqTDD,  
id-RL-InformationList,  
id-RL-InformationList-RL-ReconfReqFDD,  
id-RL-InformationList-RL-SetupReqFDD,  
id-RL-InformationResponse-RL-setupResFDDItem,  
id-RL-InformationResponseItem-RL-ReconfResp,  
id-RL-InformationResponseList-RL-ReconfReady,  
id-RL-InformationResponseList-RL-ReconfReadyItem,  
id-RL-InformationResponseList-RL-ReconfResp,  
id-RL-InformationResponseList-RL-setupResFDD,  
id-RL-InformationResponseList-RL-setupResTDD,  
id-RL-ReconfigurationFailure-RL-ReconfFailItem,  
id-RL-ReconfigurationFailureList-RL-ReconfFail,  
id-RL-ResponseInformation,  
id-RL-ResponseInformationItem,  
id-RL-ResponseInformationList,  
id-RL-informationItem,  
id-RL-informationList,  
id-RadioLinkInformation-RL-ReconfPrepFDDItem,  
id-RadioLinkInformation-RL-ReconfPrepTDD,  
id-RadioLinkInformation-RL-ReconfReqTDD,  
id-RadioLinkInformationList-RL-ReconfPrepFDD,  
id-ReportCharacteristics,  
id-SFN,  
id-SIB-SegmentInformationItem,  
id-SIB-SegmentInformationList,  
id-ScramblingCodeChange,  
id-Secondary-CCPCHListItem,  
id-SecondaryCPICH-Information,  
id-SecondarySCH-Information,  
id-ShutdownTimer,  
id-Successful-RL-InformationResponse-RL-SetupFailFDDItem,  
id-Successful-RL-InformationResponseItem,  
id-Successful-RL-InformationResponseList,  
id-Successful-RL-InformationResponseList-RL-SetupFailFDD,  
id-SynchronisationMethod,  
id-T-Cell,  
id-TDDChipOffset,  
id-TimeSlotConfigurationItem,  
id-TimeSlotConfigurationList,  
id-TransmissionGapDistance,  
id-TransmissionGapPeriod,  
id-TransmitGapLength,  
id-TransmitGapPositionMode,

```
id-UARFCN,  
id-C-ID,  
id-UL-CCTrCH-Information-RL-ReconfPrepTDDItem,  
id-UL-CCTrCH-Information-RL-ReconfReqTDDItem,  
id-UL-CCTrCH-Information-RL-SetupReqTDDItem,  
id-UL-CCTrCH-InformationItemIE,  
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD,  
id-UL-CCTrCH-InformationList-RL-ReconfReqTDD,  
id-UL-CCTrCH-InformationList-RL-SetupReqTDD,  
id-UL-CCTrCHInformation,  
id-UL-CCTrCHInformationList,  
id-UL-DPCH-Information-RL-ReconfPrepFDD,  
id-UL-DPCH-Information-RL-ReconfPrepTDDItem,  
id-UL-DPCH-Information-RL-SetupReqTDDItem,  
id-UL-DPCH-InformationItem-RL-ReconfReqFDD,  
id-UL-DPCH-InformationItem-RL-SetupReqFDD,  
id-UL-DPCH-InformationItemIE,  
id-USCH-Information-ResourceStatIndItem,  
id-USCH-InformationItem,  
id-USCH-ListItem-CTCHsetup-Req-TDD,  
id-Unsuccessful-RL-InformationResponse,  
id-Unsuccessful-RL-InformationResponse-RL-SetupFailFDDItem,  
id-Unsuccessful-RL-InformationResponseItem,  
id-Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD,  
id-Unsuccessful-RL-InformationResponseList,  
id-Unsuccessful-RL-InformationResponseList-RL-SetupFailFDD,  
  
maxAICHCell,  
maxCCPinNodeB,  
maxCellinNodeB,  
maxFACHCell,  
maxLocalCellinNodeB,  
maxMIBSEG,  
maxPCHCell,  
maxPChinNodeB,  
maxRACHCell,  
maxSF,  
maxSIBSEG,  
maxUCIDinNodeB,  
maxUSCHCell,  
maxnoCCTrCHs,  
maxnoofCCTrCHs,  
maxnoofDCHs,  
maxnoofDLCodes,  
maxnoofDPCHs,  
maxnoofDSCHs,  
maxnooffFACHCell,  
maxnooffFACHs,  
maxnooffFDDNeighbours,  
maxnoofPCHs,  
maxnoofPRACHs,
```

```

maxnoofPUSHs,
maxnoofRL-1,
maxnoofRL-2,
maxnoofRLs,
maxnoofSCCPCHs,
maxnoofTDDNeighbours,
maxnoofUSCHs
FROM NBAP-Constants;

-- ****
-- COMMON TRANSPORT CHANNEL SETUP REQUEST FDD
-- ****

CommonTransportChannelSetupRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{CommonTransportChannelSetupRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelSetupRequestFDD-Extensions}} OPTIONAL,
    ...
}

CommonTransportChannelSetupRequestFDD-IES NBAP-PROTOCOL-IES ::= {
    { ID id-C-ID           CRITICALITY ignore TYPE C-ID           PRESENCE mandatory } |
    { ID id-ConfigurationGenerationID   CRITICALITY ignore TYPE ConfigurationGenerationID   PRESENCE mandatory } |
    { ID id-CommonPhysicalChannelType-CTCHsetup-Req-FDD CRITICALITY ignore TYPE CommonPhysicalChannelType-CTCHsetup-Req-FDD PRESENCE mandatory }
},
    ...
}

CommonTransportChannelSetupRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonPhysicalChannelType-CTCHsetup-Req-FDD ::= ENUMERATED {
    secondary-CCPCH-parameters-CTCHsetup-Req-FDD           Secondary-CCPCH-parameters-CTCHsetup-Req-FDD,
    pRACH-parameters-CTCHsetup-Req-FDD                      PRACH-parameters-CTCHsetup-Req-FDD
}

Secondary-CCPCH-parameters-CTCHsetup-Req-FDD ::= SEQUENCE {
    commonPhysicalChannelID      CommonPhysicalChannelID,
    fdd-SCCPCH-Offset           FDD-SCCPCH-Offset,
    dl-ScramblingCode           DL-ScramblingCode,
    fdd-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    tFCs                         TFCS,
    secondaryCCPCH-SlotFormat   SecondaryCCPCH-SlotFormat,
    pilotBitsUsedIndicator      PilotBitsUsedIndicator,
    multiPlexingPosition        MultiPlexngPosition,
    sTTD-Indicator               STTD-Indicator,
    commonTransportChannelType   CommonTransportChannelType-CTCHsetup-Req-FDD
}

```

```

}

CommonTransportChannelType-CTCHsetup-Req-FDD ::= ENUMERATED {
    fACH-ParametersList      FACH-ParametersList-CTCHsetup-Req-FDD,
    pCH-Parameters          PCH-Parameters-CTCHsetup-Req-FDD,
    bothCH-Parameters       BothCH-Parameters-CTCHsetup-Req-FDD
}

BothCH-Parameters-CTCHsetup-Req-FDD ::= SEQUENCE {
    fACH-ParametersList      FACH-ParametersList-CTCHsetup-Req-FDD,
    pCH-Parameters          PCH-Parameters-CTCHsetup-Req-FDD
}

FACH-ParametersList-CTCHsetup-Req-FDD ::= SEQUENCE (SIZE (1..maxnooffACHs)) OF
    ProtocolIE-Container {{ FACH-ParametersListItemIE-CTCHsetup-Req-FDD }}

FACH-ParametersListItemIE-CTCHsetup-Req-FDD NBAP-PROTOCOL-IES ::= {
    { ID id-FACH-ParametersListItem-CTCHsetup-Req-FDD   CRITICALITY ignore   TYPE FACH-ParametersListItem-CTCHsetup-Req-FDD   PRESENCE mandatory },
    ...
}

FACH-ParametersListItem-CTCHsetup-Req-FDD ::= SEQUENCE {
    commonTransportChannelID  CommonTransportChannelID,
    transportFormatSet        TransportFormatSet,
    toAWS                     ToAWS,
    toAWE                     ToAWE,
    maxFACH-Power             DL-Power
}

PCH-Parameters-CTCHsetup-Req-FDD ::= SEQUENCE {
    commonTransportChannelID  CommonTransportChannelID,
    transportFormatSet        TransportFormatSet,
    toAWS                     ToAWS,
    toAWE                     ToAWE,
    pCH-Power                 DL-Power,
    pICH-Parameters           PICH-Parameters-CTCHsetup-Req-FDD
}

PICH-Parameters-CTCHsetup-Req-FDD ::= SEQUENCE {
    cmonPhysicalChannelID     CommonPhysicalChannelID,
    dl-ScramblingCode         DL-ScramblingCode,
    fdd-dl-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
    pICH-Power                 DL-Power,
    pICH-Mode                  PICH-Mode,
    sTTD-Indicator              STTD-Indicator
}

PRACH-parameters-CTCHsetup-Req-FDD ::= SEQUENCE {
    commonPhysicalChannelID     CommonPhysicalChannelID,
    tFCs                      TFCS,
    preambleSignatures         PreambleSignatures,
}

```

```

scramblingCodeWord          ScramblingCodeWord
allowedSlotFormatInformationList
  rACH-SubChannelNumbers      RACH-SubChannelNumbers,
  ul-punctureLimit           PunctureLimit,
  rACH-Parameters             RACH-Parameters-CTCHsetup-Req-FDD,
  aICH-Parameters             AICH-Parameters-CTCHsetup-Req-FDD
}

AllowedSlotFormatInformationList-CTCHsetup-Req-FDD ::= SEQUENCE (SIZE (1..maxSF)) OF ProtocolIE-Container {{AllowedSlotFormatInformationItemIE-CTCHsetup-Req-FDD} }

AllowedSlotFormatInformationItemIE-CTCHsetup-Req-FDD NBAP-PROTOCOL-IES ::= {
  { ID id-AllowedSlotFormatInformationItem-CTCHsetup-Req-FDD
    CRITICALITY ignore           TYPE AllowedSlotFormatInformationItem-CTCHsetup-Req-FDD   PRESENCE mandatory },
  ...
}

AllowedSlotFormatInformationItem-CTCHsetup-Req-FDD ::= SEQUENCE {
  rACHSlotFormat               RACH-SlotFormat
}

RACH-Parameters ::= SEQUENCE {
  commonTransportChannelID     CommonTransportChannelID,
  transportFormatSet           TransportFormatSet
}

AICH-Parameters ::= SEQUENCE {
  commonPhysicalChannelID      CommonPhysicalChannelID,
  dl-ScramblingCode            DL-ScramblingCode,
  aICH-TransmissionTiming     AICH-TransmissionTiming,
  fDD-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber,
  aICH-Power                   DL-Power,
  sTTD-Indicator                STTD-Indicator
}

-- *****
-- 
-- COMMON TRANSPORT CHANNEL SETUP REQUEST TDD
-- 
-- *****

CommonTransportChannelSetupRequestTDD ::= SEQUENCE {
  protocolIEs                  ProtocolIE-Container {{CommonTransportChannelSetupRequestTDD-IEs}},
  protocolExtensions            ProtocolExtensionContainer {{CommonTransportChannelSetupRequestTDD-Extensions}} OPTIONAL,
  ...
}

CommonTransportChannelSetupRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-C-ID                 CRITICALITY ignore      TYPE C-ID                  PRESENCE mandatory } |
  { ID id-ConfigurationGenerationID CRITICALITY ignore      TYPE ConfigurationGenerationID  PRESENCE mandatory } |
}

```

```

{ ID id-CommonPhysicalChannelType-CTCHsetupReqTDD   CRITICALITY      ignore      TYPE      CommonPhysicalChannelType-CTCHsetupReqTDD   PRESENCE
mandatory
}
{ ID id-CommontransportChannelType-CTCHsetupReqTDD   CRITICALITY      ignore      TYPE      CommontransportChannelType-CTCHsetupReqTDD   PRESENCE
mandatory
},
...
}

CommonTransportChannelSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

CommonPhysicalChannelType-CTCHsetupReqTDD ::= ENUMERATED {
  secondary-CCPCH-parameters-CTCHsetupReqTDD
  pRACH-parameters-CTCHsetupReqTDD
}
                                         Secondary-CCPCH-parameters-CTCHsetupReqTDD,
                                         PRACH-parameters-CTCHsetupReqTDD

Secondary-CCPCH-parameters-CTCHsetupReqTDD ::= SEQUENCE {
  cCTrCH-ID          CCtrCH-ID,
  tFCS               TFCS,
  secondaryCCPCH     SecondaryCCPCHList-CTCHsetupReqTDD,
}
                                         SecondaryCCPCHList-CTCHsetupReqTDD

SecondaryCCPCHList-CTCHsetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofSCCPCHs)) OF
  ProtocolIE-Container {{ SecondaryCCPCHList-CTCHsetupReqTDDItemIE }}
```

SecondaryCCPCHList-CTCHsetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {

```

  { ID id-SecondaryCCPCHList-CTCHsetupReqTDDItem  CRITICALITY ignore  TYPE SecondaryCCPCHList-CTCHsetupReqTDDItem PRESENCE mandatory
},
  ...
}
```

SecondaryCCPCHList-CTCHsetupReqTDDItem ::= SEQUENCE {

```

  commonPhysicalChannelID    CommonPhysicalChannelID,
  tdd-ChannelisationCode    TDD-ChannelisationCode,
  timeslot                  TimeSlot,
  burstType                 BurstType,
  midambleShift             MidambleShift,
  tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
  repetitionPeriod          RepetitionPeriod,
  repetitionLength          RepetitionLength,
  s-CCPCH-Power             DL-Power,
  tSTD-Indicator            TSTD-Indicator
}
```

PRACH-parameters-CTCHsetupReqTDD ::= SEQUENCE {

```

  commonPhysicalChannelID    CommonPhysicalChannelID,
  timeslot                  TimeSlot,
  tdd-ChannelisationCode    TDD-ChannelisationCode,
  burstType                 BurstType,
```

```

maxPRACH-MidambleShift      MaxPRACH-MidambleShift  OPTIONAL,
pRACH-Midamble              PRACH-Midamble,
commonTransportChannelType   CommonTransportChannelType-CTCHsetupReqTDD,
rACH                         RACH-CTCHsetupReqTDD
}

CommonTransportChannelType-CTCHsetupReqTDD ::= ENUMERATED {
  fACH-ParametersList      FACH-ParametersList-CTCHsetupReqTDD,
  pCH-Parameters           PCH-Parameters-CTCHsetupReqTDD,
  bothCH-Parameters        BothCH-Parameters-CTCHsetupReqTDD
}

BothCH-Parameters-CTCHsetupReqTDD ::= SEQUENCE {
  fACH-ParametersList      FACH-ParametersList-CTCHsetupReqFDD,
  pCH-Parameters           PCH-Parameters-CTCHsetupReqFDD
}

FACH-ParametersList-CTCHsetupReqFDD ::= SEQUENCE (SIZE (1..maxnoofFACHs)) OF
  ProtocolIE-Container {{FACH-ParametersList-CTCHsetupReqFDD ItemIE }}

FACH-ParametersList-CTCHsetupReqFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-FACH-ParametersList-CTCHsetupReqFDDItem CRITICALITY ignore  TYPE FACH-ParametersList-CTCHsetupReqFDDItem  PRESENCE mandatory  },
  ...
}

FACH-ParametersList-CTCHsetupReqFDDItem ::= SEQUENCE {
  commonTransportChannelID  CommonTransportChannelID,
  dl-TransportFormatSet    DL-TransportFormatSet,
  toAWS                   ToAWS,
  toAWE                   ToAWE
}

PCH-ParametersList-CTCHsetupReqFDD ::= SEQUENCE (SIZE (1..maxnoofPCHs)) OF
  ProtocolIE-Container {{PCH-ParametersList-CTCHsetupReqFDD ItemIE }}

PCH-ParametersList-CTCHsetupReqFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-PCH-ParametersList-CTCHsetupReqFDDItem CRITICALITY ignore  TYPE PCH-ParametersList-CTCHsetupReqFDDItem PRESENCE mandatory  },
  ...
}

PCH-ParametersList-CTCHsetupReqFDDItem ::= SEQUENCE {
  commonTransportChannelID  CommonTransportChannelID,
  dl-TransportFormatSet    DL-TransportFormatSet,
  toAWS                   ToAWS,
  toAWE                   ToAWE,
  pICH-Parameters          PICH-Parameters-CTCHsetupReqTDD
}

PICH-Parameters-CTCHsetup-Req-TDD ::= SEQUENCE {
  CommonPhysicalChannelID   CommonPhysicalChannelID,
  tdd-ChannelisationCode   TDD-ChannelisationCode,
}

```

```

timeSlot          TimeSlot,
pICH-Power       PICH-Power,
burstType        BurstType      OPTIONAL,
midambleShift   MidambleShift,
tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
repetitionPeriod RepetitionPeriod,
repetitionLength RepetitionLength,
pagingIndicatorLength PagingIndicatorLength,
pICH-Power       DL-Power
...
}

RACH-CTCHsetupReqTDD ::= SEQUENCE {
    commontransportChannelID CommontransportChannelID
}

-- *****
-- 
-- COMMON TRANSPORT CHANNEL SETUP RESPONSE
-- 
-- *****

CommonTransportChannelSetupResponse ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container {{CommonTransportChannelSetupResponse-IEs}},
    protocolExtensions     ProtocolExtensionContainer {{CommonTransportChannelSetupResponse-Extensions}} } OPTIONAL,
    ...
}

CommonTransportChannelSetupResponse-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CommonPhysicalChannelType-CTCHsetup-Resp   CRITICALITY ignore   TYPE CommonPhysicalChannelType-CTCHsetup-Resp PRESENCE mandatory
} |
{ ID id-CriticalityDiagnostic   CRITICALITY ignore   TYPE CriticalityDiagnostic   PRESENCE optional },
    -- At least either or Cause IE or Criticality Diagnostic IE shall be present--
    ...
}

CommonTransportChannelSetupResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonTransportChannelType-CTCHsetup-Resp ::= ENUMERATED {
    fACH-ParametersList   FACH-ParametersList-CTCHsetup-Resp,
    pCH-Parameters       PCH-Parameters-CTCHsetup-Resp,
    bothCH-Parameters   BothCH-Parameters-CTCHsetup-Resp
}

BothCH-Parameters-CTCHsetup-resp ::= SEQUENCE {
    fACH-ParametersList   FACH-ParametersList-CTCHsetup-Resp,

```

```

pCH-Parameters          PCH-Parameters-CTCHsetupResp
}

FACH-ParametersList-CTCHsetup-Resp ::= SEQUENCE (SIZE (1..maxnoofFACHs)) OF
  ProtocolIE-Container {{FACH-ParametersList-CTCHsetup-RespItemIE} }

FACH-ParametersList-CTCHsetup-RespItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-FACH-ParametersList-CTCHsetup-RespItem CRITICALITY ignore TYPE FACH-ParametersList-CTCHsetup-RespItem PRESENCE mandatory },
  ...
}

FACH-ParametersList-CTCHsetup-RespItem ::= SEQUENCE {
  commonTransportChannelID      CommonTransportChannelID,
  transportLayerAddress         TransportLayerAddress,
  bindingID                     BindingID
}

PCH-Parameters-CTCHsetup-Resp ::= SEQUENCE {
  commonTransportChannelID      CommonTransportChannelID,
  transportLayerAddress         TransportLayerAddress,
  bindingID                     BindingID
}

PRACH-Parameters-CTCHsetup-Resp ::= SEQUENCE {
  commonTransportChannelID      CommonTransportChannelID,
  transportLayerAddress         TransportLayerAddress,
  bindingID                     BindingID
}

-- *****
-- COMMON TRANSPORT CHANNEL SETUP FAILURE
-- *****

CommonTransportChannelSetupFailure ::= SEQUENCE {
  protocolIEs                  ProtocolIE-Container {{CommonTransportChannelSetupFailure-IEs}},
  protocolExtensions            ProtocolExtensionContainer {{CommonTransportChannelSetupFailure-Extensions}} OPTIONAL,
  ...
}

CommonTransportChannelSetupFailure-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-Cause                CRITICALITY ignore TYPE Cause                  PRESENCE mandatory } |
  { ID id-CriticalityDiagnostic CRITICALITY ignore TYPE CriticalityDiagnostic PRESENCE optional } |
  { ID id-CriticalityDiagnostic CRITICALITY ignore TYPE CriticalityDiagnostic PRESENCE optional },
  ...
}

CommonTransportChannelSetupFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
}

```

```

}
...
-- *****
-- COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST FDD
-- *****

CommonTransportChannelReconfigurationRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CommonTransportChannelReconfigurationRequestFDD-IES}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelReconfigurationRequestFDD-Extensions}}
OPTIONAL,
    ...
}

CommonTransportChannelReconfigurationRequestFDD-IES NBAP-PROTOCOL-IES ::= {
    { ID id-ConfigurationGenerationID      CRITICALITY ignore TYPE ConfigurationGenerationID      PRESENCE mandatory }|
    { ID id-FACH-ParametersList-CTCHreconf-Req-FDD  CRITICALITY ignore TYPE FACH-ParametersList-CTCHreconf-Req-FDD PRESENCE optional }|
    { ID id-PCH-Parameters-CTCHreconf-Req-FDD    CRITICALITY ignore TYPE PCH-Parameters-CTCHreconf-Req-FDD    PRESENCE optional }|
    { ID id-PICH-Parameters-CTCHreconf-Req-FDD   CRITICALITY ignore TYPE PICH-Parameters-CTCHreconf-Req-FDD   PRESENCE optional }|
    { ID id-PRACH-ParametersList-CTCHreconf-Req-FDD  CRITICALITY ignore TYPE PRACH-ParametersList-CTCHreconf-Req-FDD  PRESENCE optional
}|
    { ID id-AllowedSlotFormatInformationList-CTCHreconf-Req-FDD
CRITICALITY ignor           TYPE AllowedSlotFormatInformationList-CTCHreconf-Req-FDD  PRESENCE optional
}||
    { ID id-AICH-ParametersList-CTCHreconf-Req-FDD  CRITICALITY ignore TYPE AICH-ParametersList-CTCHreconf-Req-FDD PRESENCE optional },
    ...
}

CommonTransportChannelReconfigurationRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

FACH-ParametersList-CTCHreconf-Req-FDD ::= SEQUENCE (SIZE (1..maxFACHCell)) OF
    ProtocolIE-Container {{FACH-ParametersListItemIE-CTCHreconf-Req-FDD} }

FACH-ParametersListItemIE-CTCHreconf-Req-FDD NBAP-PROTOCOL-IES ::= {
    { ID id-FACH-ParametersListItem-CTCHreconf-Req-FDD      CRITICALITY ignore
        PRESENCE mandatory },
    ...
}

FACH-ParametersListItem-CTCHreconf-Req-FDD ::= SEQUENCE {
    commonTransportChannelID  CommonTransportChannelID,
    maxFACH-Power            DL-Power          OPTIONAL,
    toAWS                    ToAWS             OPTIONAL,
    toAWE                    ToAWE             OPTIONAL
}

```

```

PCH-Parameters-CTCHreconf-Req-FDD ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    pCH-Power                  DL-Power          OPTIONAL,
    toAWS                      ToAWS            OPTIONAL,
    toAWE                      ToAWE            OPTIONAL
}

PICH-Parameters-CTCHreconf-Req-FDD ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    pICh-Power                 DL-Power          OPTIONAL
}

PRACH-ParametersList-CTCHreconf-Req-FDD ::= SEQUENCE (SIZE (1..maxnoofPRACHs)) OF
    ProtocolIE-Container {{PRACH-ParametersListItemIE-CTCHreconf-Req-FDD} }

PRACH-ParametersListItemIE-CTCHreconf-Req-FDD NBAP-PROTOCOL-IES ::= {
    { ID id-PRACH-ParametersListItem-CTCHreconf-Req-FDD      CRITICALITY ignore
        PRESENCE optional },                                     TYPE PRACH-ParametersListItem-CTCHreconf-Req-FDD
    ...
}

PRACH-ParametersListItem-CTCHreconf-Req-FDD ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    preambleSignatures         PreambleSignatures,
}

AllowedSlotFormatInformationList-CTCHreconf-Req-FDD ::= SEQUENCE (SIZE (1..maxSF)) OF
    ProtocolIE-Container {{ AllowedSlotFormatInformationListItemIE-CTCHreconf-Req-FDD } }

AllowedSlotFormatInformationListItemIE-CTCHreconf-Req-FDD NBAP-PROTOCOL-IES ::= {
    { ID id-AllowedSlotFormatInformationListItem-CTCHreconf-Req-FDD
        CRITICALITY ignore
        TYPE     AllowedSlotFormatInformationListItem-CTCHreconf-Req-FDD
        PRESENCE mandatory },
    ...
}

AllowedSlotFormatInformationListItem-CTCHreconf-Req-FDD ::= SEQUENCE {
    slotFormat                SlotFormat
    rACH-SubChannelNumbers    RACH-SubChannelNumbers   OPTIONAL
}

AICH-ParametersList-CTCHreconf-Req-FDD ::= SEQUENCE (SIZE (1..maxnoofPRACHs)) OF
    ProtocolIE-Container {{ AICH-ParametersListItemIE-CTCHreconf-Req-FDD } }

AICH-ParametersListItemIE-CTCHreconf-Req-FDD NBAP-PROTOCOL-IES ::= {
    { ID id-AICH-ParametersListItem-CTCHreconf-Req-FDD      CRITICALITY ignore
        PRESENCE mandatory },
    ...
}

AICH-ParametersListItem-CTCHreconf-Req-FDD ::= SEQUENCE {

```

```

commonTransportChannelID    CommonTransportChannelID,
aICH-Power                 DL-Power
}

-- ****
-- COMMON TRANSPORT CHANNEL RECONFIGURATION REQUEST TDD
-- ****

CommonTransportChannelReconfigurationRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CommonTransportChannelReconfigurationRequestTDD-IES}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelReconfigurationRequestTDD-Extensions}}
OPTIONAL,
    ...
}

CommonTransportChannelReconfigurationRequestTDD-IES NBAP-PROTOCOL-IES ::= {
    { ID id-C-ID           CRITICALITY ignore TYPE C-ID             PRESENCE mandatory }|
    { ID id-ConfigurationGenerationID   CRITICALITY ignore TYPE ConfigurationGenerationID   PRESENCE mandatory }|
    { ID id-CommonPhysicalChannelType-CTCHreconfReqTDD CRITICALITY ignore TYPE CommonPhysicalChannelType-CTCHreconfReqTDD PRESENCE
mandatory
}|
    { ID id-FACH-ParametersList-CTCHreconfReqTTD   CRITICALITY ignore TYPE FACH-ParametersList-CTCHreconfReqTTD   PRESENCE optional }|
    { ID id-PCH-ParametersList-CTCHreconfReqTTD CRITICALITY ignore TYPE PCH-ParametersList-CTCHreconfReqTTD PRESENCE optional },
    ...
}

CommonTransportChannelReconfigurationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonPhysicalChannelType-CTCHreconfReqTDD ::= ENUMERATED {
    secondaryCCPCH      SecondaryCCPCH-CTCHreconfReqTDD
}

SecondaryCCPCH-CTCHreconfReqTDD ::= SEQUENCE {
    cCTrCH-ID           CCTrCH-ID,
    secondaryCCPCHList  SecondaryCCPCHList-CTCHreconfReqTDD
}

SecondaryCCPCHList-CTCHreconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofSCCPCHs)) OF
    ProtocolIE-Container {{ SecondaryCCPCHList-CTCHreconfReqTDDItemIE }}

```

```

commonPhysicalChannelID          CommonPhysicalChannelID,
pICH-Power                      PICH-Power
}

FACH-ParametersList-CTCHreconfReqTTD ::= SEQUENCE (SIZE (1..maxFACHCell)) OF
  ProtocolIE-Container {{ FACH-ParametersListItem-CTCHreconfReqTTD }}

FACH-ParametersListItem-CTCHreconfReqTTD NBAP-PROTOCOL-IES ::= {
  { ID id-FACH-ParametersListItem-CTCHreconfReqTTD CRITICALITY ignore      TYPE FACH-ParametersListItem-CTCHreconfReqTTD PRESENCE mandatory   },
  ...
}

FACH-ParametersListItem-CTCHreconf-Req-TTD ::= SEQUENCE {
  commonTransportChannelID      CommonTransportChannelID,
  toAWS                         ToAWS           OPTIONAL,
  toAWE                         ToAWE           OPTIONAL
}
PCH-ParametersList-CTCHreconfReqTTD ::= SEQUENCE (SIZE (1..maxnoofPCHs)) OF
  ProtocolIE-Container {{ PCH-ParametersListItem-CTCHreconfReqTTD }}

PCH-ParametersListItem-CTCHreconfReqTTD NBAP-PROTOCOL-IES ::= {
  { ID id-PCH-ParametersListItem-CTCHreconfReqTTD CRITICALITY ignore      TYPE PCH-ParametersListItem-CTCHreconfReqTTD PRESENCE optional   },
  ...
}

PCH-ParametersListItem-CTCHreconfReqTTD ::= SEQUENCE {
  commonTransportChannelID      CommonTransportChannelID,
  toAWS                         ToAWS           OPTIONAL,
  toAWE                         ToAWE           OPTIONAL
}
-- *****
-- COMMON TRANSPORT CHANNEL RECONFIGURATION RESPONSE
--
-- *****

CommonTransportChannelReconfigurationResponse ::= SEQUENCE {
  protocolIEs                  ProtocolIE-Container     {{CommonTransportChannelReconfigurationResponse-IEs}},
  protocolExtensions            ProtocolExtensionContainer {{CommonTransportChannelReconfigurationResponse-Extensions}}           OPTIONAL,
  ...
}

CommonTransportChannelReconfigurationResponse-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-CriticalityDiagnostic      CRITICALITY ignore      TYPE CriticalityDiagnostic      PRESENCE optional
},
  ...
}

CommonTransportChannelReconfigurationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {

```

```

}

-- *****
-- COMMON TRANSPORT CHANNEL RECONFIGURATION FAILURE
-- *****

CommonTransportChannelReconfigurationFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CommonTransportChannelReconfigurationFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelReconfigurationFailure-Extensions}} OPTIONAL,
    ...
}

CommonTransportChannelReconfigurationFailure-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-Cause           CRITICALITY ignore TYPE Cause           PRESENCE mandatory }|
    { ID id-CriticalityDiagnostic CRITICALITY ignore TYPE CriticalityDiagnostic PRESENCE optional
    }|
    { ID id-CriticalityDiagnostic CRITICALITY ignore TYPE CriticalityDiagnostic PRESENCE optional
    },
    ...
}

CommonTransportChannelReconfigurationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- COMMON TRANSPORT CHANNEL DELETION REQUEST
-- *****

CommonTransportChannelDeletionRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CommonTransportChannelDeletionRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelDeletionRequest-Extensions}} OPTIONAL,
    ...
}

CommonTransportChannelDeletionRequest-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-C-ID            CRITICALITY ignore TYPE C-ID           PRESENCE mandatory }|
    { ID id-CommonPhysicalChannelID CRITICALITY ignore TYPE CommonPhysicalChannelID PRESENCE mandatory }|
    { ID id-ConfigurationGenerationID CRITICALITY ignore TYPE ConfigurationGenerationID PRESENCE mandatory },
    ...
}

CommonTransportChannelDeletionRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- ****
-- COMMON TRANSPORT CHANNEL DELETION RESPONSE
-- ****

CommonTransportChannelDeletionResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CommonTransportChannelDeletionResponse-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonTransportChannelDeletionResponse-Extensions}} OPTIONAL,
    ...
}

CommonTransportChannelDeletionResponse-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-CriticalityDiagnostic      CRITICALITY ignore      TYPE CriticalityDiagnostic      PRESENCE optional
},
    ...
}

CommonTransportChannelDeletionResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- BLOCK RESOURCE REQUEST
-- ****

BlockResourceRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{BlockResourceRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{BlockResourceRequest-Extensions}} OPTIONAL,
    ...
}

BlockResourceRequest-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-C-ID           CRITICALITY ignore      TYPE C-ID                  PRESENCE mandatory }|
{ ID id-BlockingPriorityIndicator   CRITICALITY ignore      TYPE BlockingPriorityIndicator   PRESENCE mandatory }|
{ ID id-ShutdownTimer            CRITICALITY ignore      TYPE ShutdownTimer             PRESENCE conditional
},
    -- The information element is present when the Blocking Priority Indicator IE indicates 'Normal Priority'--
    ...
}

BlockResourceRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****

```

```

-- BLOCK RESOURCE RESPONSE
--
-- ****
BlockResourceResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{BlockResourceResponse-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{BlockResourceResponse-Extensions}}           OPTIONAL,
    ...
}

BlockResourceResponse-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-CriticalityDiagnostic      CRITICALITY ignore      TYPE CriticalityDiagnostic      PRESENCE optional
    },
...
}

BlockResourceResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- BLOCK RESOURCE FAILURE
--
-- ****
BlockResourceFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{BlockResourceFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{BlockResourceFailure-Extensions}}           OPTIONAL,
    ...
}

BlockResourceFailure-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-Cause                CRITICALITY ignore      TYPE Cause                  PRESENCE mandatory      }|
{ ID id-CriticalityDiagnostic CRITICALITY ignore      TYPE CriticalityDiagnostic      PRESENCE optional
    },
...
}

BlockResourceFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- UNBLOCK RESOURCE INDICATION
--
-- ****

```

```

UnblockResourceIndication ::= SEQUENCE {
    protocolIEs                  ProtocolIE-Container     {{UnblockResourceIndication-IEs}},
    protocolExtensions           ProtocolExtensionContainer {{UnblockResourceIndication-Extensions}}                               OPTIONAL,
    ...
}

UnblockResourceIndication-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-C-ID                      CRITICALITY ignore   TYPE C-ID                                PRESENCE mandatory },
    ...
}

UnblockResourceIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- AUDIT REQUIRED INDICATION
-- 
-- *****

AuditRequiredIndication ::= SEQUENCE {
    protocolIEs                  ProtocolIE-Container     {{AuditRequiredIndication-IEs}},
    protocolExtensions           ProtocolExtensionContainer {{AuditRequiredIndication-Extensions}}                               OPTIONAL,
    ...
}

AuditRequiredIndication-IEs NBAP-PROTOCOL-IES ::= {
    ...
}

AuditRequiredIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- AUDIT REQUEST
-- 
-- *****

AuditRequest ::= SEQUENCE {
    protocolIEs                  ProtocolIE-Container     {{AuditRequest-IEs}},
    protocolExtensions           ProtocolExtensionContainer {{AuditRequest-Extensions}}                               OPTIONAL,
    ...
}

```

```

AuditRequest-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-Cell-ParametersList-Audit-Req   CRITICALITY ignore      TYPE Cell-ParametersList-Audit-Req PRESENCE optional },
    ...
}

AuditRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

Cell-ParametersList-Audit-Req ::= SEQUENCE (SIZE (1..maxCellinNodeB)) OF
    ProtocolIE-Container {{Cell-ParametersItemIE-Audit-Req}}


Cell-ParametersItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-Cell-ParametersItem-Audit-Req   CRITICALITY ignore      TYPE Cell-ParametersItem-Audit-Req PRESENCE mandatory },
    ...
}

Cell-ParametersItem-Audit-Req ::= SEQUENCE {
    c-ID          C-ID,
    configurationGenerationID ConfigurationGenerationID
}

-- ****
-- 
-- AUDIT RESPONSE
-- 
-- ****

AuditResponse ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container {{AuditResponse-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{AuditResponse-Extensions}}           OPTIONAL,
    ...
}

AuditResponse-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-Cell-InformationList-Audit-Res   CRITICALITY ignore      TYPE Cell-InformationList-Audit-Res   PRESENCE optional } |
    { ID id-CommunicationControlPort-InformationList-Audit-Res   CRITICALITY ignore      TYPE CommunicationControlPort-
InformationList-Audit-Res   PRESENCE optional }
}
    { ID id-Cell-InformationList-Audit-Res   CRITICALITY ignore      TYPE Cell-InformationList-Audit-Res   PRESENCE optional } |
{ ID id-CriticalityDiagnostic   CRITICALITY ignore      TYPE CriticalityDiagnostic   PRESENCE optional
},
    ...
}

AuditResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

Cell-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxUCIDinNodeB)) OF
    ProtocolIE-Container {{Cell-InformationItemIE-Audit-Res }}

Cell-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-Cell-InformationItem-Audit-Res      CRITICALITY ignore   TYPE Cell-InformationItem-Audit-Res      PRESENCE      optional      },
    ...
}

Cell-InformationItem-Audit-Res ::= SEQUENCE {
    c-ID          C-ID,
    resourceOperationState   ResourceOperationState,
    availabilityStatus     AvailabilityStatus,
    maximumDLPowerCapability MaximumDLPowerCapability,
    -- to do
    minimumSpreadingFactor MinimumSpreadingFactor,
    -- to do
    primary-SCH-Information P-SCH-Information-Audit-Res OPTIONAL,
    secondary-SCH-Information S-SCH-Information-Audit-Res OPTIONAL,
    primary-CPICH-Information P-CPICH-Information-Audit-Res OPTIONAL,
    secondary-CPICH-Information S-CPICH-Information-Audit-Res OPTIONAL,
    primary-CCPCH-Information P-CCPCH-Information-Audit-Res OPTIONAL,
    bCH-Information      BCH-Information-Audit-Res OPTIONAL,
    secondary-CCPCH-Information S-CCPCH-Information-Audit-Res OPTIONAL,
    pCH-InformationList  PCH-InformationList-Audit-Res OPTIONAL,
    pIICH-Information    PICH-Information-Audit-Res OPTIONAL,
    fACH-InformationList FACH-InformationList-Audit-Res OPTIONAL,
    pRACH-InformationList PRACH-InformationList-Audit-Res OPTIONAL,
    rACH-InformationList RACH-InformationList-Audit-Res OPTIONAL,
    aIICH-InformationList AICH-InformationList-Audit-Res OPTIONAL,
    sSCH-InformationList SCH-InformationList-Audit-Res OPTIONAL,
    pSCH-InformationList PSCH-InformationList-Audit-Res OPTIONAL,
    communicationControlPortInformation CommunicationControlPortInformation-Audit-Res      OPTIONAL,
    local-CellInformation Local-CellInformation-Audit-Res      OPTIONAL
}

P-SCH-Information-Audit-Res ::= SEQUENCE {
    commonTransportChannelID CommonTransportChannelID,
    resourceOperationState   ResourceOperationState,
    availabilityStatus     AvailabilityStatus
}

S-SCH-Information-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID CommonPhysicalChannelID,
    resourceOperationState   ResourceOperationState,
    availabilityStatus     AvailabilityStatus
}

P-CPICH-Information-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID CommonPhysicalChannelID,

```

```

resourceOperationState      ResourceOperationState,
availabilityStatus         AvailabilityStatus
}

S-CPICH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxSCPICHCell)) OF
    ProtocolIE-Container {{S-CPICH-InformationItemIE-Audit-Res }}

S-CPICH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-S-CPICH-InformationItem-Audit-Res           CRITICALITY ignore   TYPE S-CPICH-InformationItem-Audit-Res   PRESENCE mandatory
},
    ...
}

S-CPICH-InformationItem-Audit-Res ::= SEQUENCE {
    commonTransportChannelID   CommonTransportChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

P-CCPCH-Information-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

BCH-Information-Audit-Res ::= SEQUENCE {
    commonTransportChannelID   CommonTransportChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

S-CCPCH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxSCCPCHCell)) OF
    ProtocolIE-Container {{S-CCPCH-InformationItemIE-Audit-Res }}

S-CCPCH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-S-CCPCH-InformationItem-Audit-Res           CRITICALITY ignore   TYPE S-CCPCH-InformationItem-Audit-Res   PRESENCE mandatory
},
    ...
}

S-CCPCH-InformationItem-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

PCH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxPCHCell)) OF
    ProtocolIE-Container {{PCH-InformationItemIE-Audit-Res }}

PCH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-PCH-InformationItem-Audit-Res           CRITICALITY ignore   TYPE PCH-InformationItem-Audit-Res   PRESENCE mandatory
}

```

```

},
...
}

PCH-InformationItem-Audit-Res ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus        AvailabilityStatus
}

FACH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxFACHCell)) OF
    ProtocolIE-Container {{FACH-InformationItemIE-Audit-Res} }

FACH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-FACH-InformationItem-Audit-Res      CRITICALITY ignore   TYPE FACH-InformationItem-Audit-Res PRESENCE mandatory      },
    ...
}

FACH-InformationItem-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus        AvailabilityStatus
}

PRACH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxPRACHCell)) OF
    ProtocolIE-Container {{PRACH-InformationItemIE-Audit-Res} }

PRACH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-PRACH-InformationItem-Audit-Res      CRITICALITY ignore   TYPE PRACH-InformationItem-Audit-Res   PRESENCE mandatory      },
    ...
}

PRACH-InformationItem-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID    CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus        AvailabilityStatus
}

RACH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxRACHCell)) OF
    ProtocolIE-Container {{RACH-InformationItemIE-Audit-Res} }

RACH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-RACH-InformationItem-Audit-Res      CRITICALITY ignore   TYPE RACH-InformationItem-Audit-Res PRESENCE mandatory      },
    ...
}

RACH-InformationItem-Audit-Res ::= SEQUENCE {
    commonTransportChannelID    CommonTransportChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus        AvailabilityStatus
}

```

```

AICH-InformationList-Audit-Res ::= SEQUENCE (SIZE (1..maxRACHCell)) OF
    ProtocolIE-Container {{RACH-InformationItemIE-Audit-Res}}


AICH-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-RACH-InformationItem-Audit-Res      CRITICALITY ignore   TYPE RACH-InformationItem-Audit-Res PRESENCE mandatory      },
    ...
}

AICH-InformationItem-Audit-Res ::= SEQUENCE {
    CommonPhysicalChannelID      CommonPhysicalChannelID,
    resourceOperationState      ResourceOperationState,
    availabilityStatus          AvailabilityStatus
}

SCH-InformationItem-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID      CommonPhysicalChannelID,
    resourceOperationState      ResourceOperationState,
    availabilityStatus          AvailabilityStatus
}

RACH-InformationItem-Audit-Res ::= SEQUENCE {
    commonPhysicalChannelID      CommonPhysicalChannelID,
    resourceOperationState      ResourceOperationState,
    availabilityStatus          AvailabilityStatus
}

CommunicationControlPort-InformationList-Audit-Res ::=SEQUENCE (SIZE (1..maxCCPinNodeB)) OF
    ProtocolIE-Container {{CommunicationControlPort-InformationItemIE}}


CommunicationControlPort-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-CommunicationControlPort-InformationItem-Audit-Res      CRITICALITY ignore   TYPE CommunicationControlPort-InformationItem-
        Audit-Res      PRESENCE      mandatory      },
    ...
}

CommunicationControlPort-InformationItem-Audit-Res ::= SEQUENCE {
    communicationControlPortID  CommunicationControlPortID,
    resourceOperationalState   ResourceOperationalState,
    availabilityStatus          AvailabilityStatus
}

LocalCell-InformationList-Audit-Res ::=SEQUENCE (SIZE (1..maxLocalCellinNodeB)) OF
    ProtocolIE-Container {{LocalCell-InformationItemIE-Audit-Res}}


LocalCell-InformationItemIE-Audit-Res NBAP-PROTOCOL-IES ::= {
    { ID id-LocalCell-InformationItem-Audit-Res CRITICALITY ignore   TYPE LocalCell-InformationItem-Audit-Res  PRESENCE mandatory      },
    ...
}

LocalCell-InformationItem-Audit-Res ::= SEQUENCE {

```

```

localCellID          LocalCellID,
numberOfChannelElements NumberOfChannelElements   OPTIONAL,
maximumDLPowerCapability MaximumDLPowerCapability   OPTIONAL
}

-- ****
-- 
-- COMMON MEASUREMENT INITIATION REQUEST
-- 
-- ****

CommonMeasurementInitiationRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CommonMeasurementInitiationRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonMeasurementInitiationRequest-Extensions}} OPTIONAL,
    ...
}

CommonMeasurementInitiationRequest-IES NBAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID           CRITICALITY ignore TYPE MeasurementID           PRESENCE mandatory }|
    { ID id-CommonMeasurementObjectType-CMeasureInitReq CRITICALITY ignore TYPE CommonMeasurementObjectType-CMeasureInitReq PRESENCE mandatory
}|
    { ID id-CommonMeasurementType    CRITICALITY ignore TYPE CommonMeasurementType    PRESENCE mandatory }|
    { ID id-MeasurementCharacteristics CRITICALITY ignore TYPE MeasurementCharacteristics PRESENCE mandatory }|
    { ID id-ReportCharacteristics   CRITICALITY ignore TYPE ReportCharacteristics  PRESENCE mandatory },
    ...
}

CommonMeasurementInitiationRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonMeasurementObjectType-CMeasureInitReq ::= ENUMERATED {
    cell                  Cell-CMeasureInitReq,
    rACH                 RACH-CMeasureInitReq
}

Cell-CMeasureInitReq ::= SEQUENCE {
    c-ID                C-ID,
    timeSlot            TimeSlot
}

RACH-CMeasureInitReq ::= SEQUENCE {
    c-ID                C-ID,
    commonTransportChannelID CommonTransportChannelID
}

-- ****
-- 
-- COMMON MEASUREMENT INITIATION RESPONSE
-- 

```

```

-- ****
CommonMeasurementInitiationResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CommonMeasurementInitiationResponse-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonMeasurementInitiationResponse-Extensions}} } OPTIONAL,
    ...
}

CommonMeasurementInitiationResponse-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID      CRITICALITY ignore  TYPE MeasurementID           PRESENCE mandatory  }|
    { ID id-CommonMeasurementObjectType-Res  CRITICALITY ignore  TYPE CommonMeasurementObjectType-Res  PRESENCE mandatory  }|
    { ID id-SFN                CRITICALITY ignore  TYPE SFN                  PRESENCE optional  }|
    { ID id-CriticalityDiagnostic  CRITICALITY ignore  TYPE CriticalityDiagnostic  PRESENCE optional
    },
    ...
}

CommonMeasurementInitiationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

CommonMeasurementObjectType-Res ::= CHOICE {
    cell                  Cell-CommonMeasurement-Res,
    rACH                 RACH-CommonMeasurement-Res
}

Cells-CommonMeasurement-Req ::= SEQUENCE {
    commonMeasurementValue CommonMeasurementValue
}

RACH-CommonMeasurement-Req ::= SEQUENCE {
    commonMeasurementValue CommonMeasurementValue
}

-- ****
-- COMMON MEASUREMENT INITIATION FAILURE
-- ****

CommonMeasurementInitiationFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CommonMeasurementInitiationFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonMeasurementInitiationFailure-Extensions}} } OPTIONAL,
    ...
}

CommonMeasurementInitiationFailure-IEs NBAP-PROTOCOL-IES ::= {

```

```

{ ID id-MeasurementID          CRITICALITY ignore  TYPE MeasurementID          PRESENCE mandatory }|
{ ID id-Cause                  CRITICALITY ignore  TYPE Cause                  PRESENCE mandatory }|
{ ID id-CriticalityDiagnostic CRITICALITY ignore  TYPE CriticalityDiagnostic  PRESENCE optional
},
...
}

CommonMeasurementInitiationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
...
}

-- *****
-- COMMON MEASUREMENT REPORT
-- *****

CommonMeasurementReport ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container   {{CommonMeasurementReport-IEs}},
    protocolExtensions     ProtocolExtensionContainer {{CommonMeasurementReport-Extensions}}      OPTIONAL,
    ...
}

CommonMeasurementReport-IES NBAP-PROTOCOL-IES ::= {
{ ID id-MeasurementID          CRITICALITY ignore  TYPE MeasurementID          PRESENCE mandatory }|
{ ID id-CommonMeasurementObject-Type-Rep  CRITICALITY ignore  TYPE CommonMeasurementObject-Type-Rep  PRESENCE mandatory }|
{ ID id-SFN                   CRITICALITY ignore  TYPE SFN                  PRESENCE optional },
...
}

CommonMeasurementReport-Extensions NBAP-PROTOCOL-EXTENSION ::= {
...
}

CommonMeasurementObjectType-Rep ::= ENUMERATED {
    cell                  Cell-CommonMeasurement-Rep,
    rACH                 RACH-CommonMeasurement-Rep
}

Cell-CommonMeasurement-Rep ::= SEQUENCE {
    commonMeasurementValue CommonMeasurementValue
}

RACH-CommonMeasurement-Rep ::= SEQUENCE {
    commonMeasurementValue CommonMeasurementValue
}

-- *****
-- *****

```

```

-- COMMON MEASUREMENT TERMINATION REQUEST
--
-- ****
CommonMeasurementTerminationRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CommonMeasurementTerminationRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonMeasurementTerminationRequest-Extensions}} } OPTIONAL,
    ...
}

CommonMeasurementTerminationRequest-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID           CRITICALITY ignore   TYPE MeasurementID           PRESENCE mandatory },
    ...
}

CommonMeasurementTerminationRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- COMMON MEASUREMENT FAILURE INDICATION
--
-- ****
CommonMeasurementFailureIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CommonMeasurementFailureIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CommonMeasurementFailureIndication-Extensions}} } OPTIONAL,
    ...
}

CommonMeasurementFailureIndication-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-MeasurementID           CRITICALITY ignore   TYPE MeasurementID           PRESENCE mandatory } |
    { ID id-Cause                  CRITICALITY ignore   TYPE Cause                 PRESENCE mandatory } |
    { ID id-CriticalityDiagnostic CRITICALITY ignore   TYPE CriticalityDiagnostic PRESENCE optional },
    ...
}

CommonMeasurementFailureIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- CELL SETUP REQUEST FDD
-- ****

```

```

CellSetupRequestFDD ::= SEQUENCE {
    protocolIEs                  ProtocolIE-Container      {{CellSetupRequestFDD-IEs}},
    protocolExtensions           ProtocolExtensionContainer {{CellSetupRequestFDD-Extensions}}                                OPTIONAL,
    ...
}

CellSetupRequestFDD-IES NBAP-PROTOCOL-IES ::= {
{ ID id-LocalCell-ID          CRITICALITY ignore   TYPE LocalCell-ID          PRESENCE mandatory }|
{ ID id-C-ID                  CRITICALITY ignore   TYPE C-ID                  PRESENCE mandatory }|
{ ID id-ConfigurationGenerationID CRITICALITY ignore   TYPE ConfigurationGenerationID  PRESENCE mandatory }|
{ ID id-T-Cell                 CRITICALITY ignore   TYPE T-Cell                 PRESENCE mandatory }|
{ ID id-UARFCN                CRITICALITY ignore   TYPE UARFCN                PRESENCE mandatory }|
{ ID id-MaximumTransmissionPower CRITICALITY ignore   TYPE MaximumTransmissionPower PRESENCE mandatory }|
{ ID id-PrimaryScramblingCode  CRITICALITY ignore   TYPE PrimaryScramblingCode  PRESENCE mandatory }|
{ ID id-PrimarySCH-Information-Cellsetup-Req CRITICALITY ignore   TYPE PrimarySCH-Information-Cellsetup-Req PRESENCE mandatory }|
{ ID id-SecondarySCH-Information-Cellsetup-Req CRITICALITY ignore   TYPE SecondarySCH-Information-Cellsetup-Req PRESENCE mandatory }|
{ ID id-PrimaryCPICH-Information-Cellsetup-Req CRITICALITY ignore   TYPE PrimaryCPICH-Information-Cellsetup-Req PRESENCE mandatory }|
{ ID id-SecondaryCPICH-Information-Cellsetup-Req CRITICALITY ignore   TYPE SecondaryCPICH-Information-Cellsetup-Req PRESENCE mandatory }|
    PRESENCE optional
}|
{ ID id-PrimaryCCPCH-Information-Cellsetup-Req CRITICALITY ignore   TYPE PrimaryCCPCH-Information-Cellsetup-Req PRESENCE mandatory },
...
}

CellSetupRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

PrimarySCH-Information-Cellsetup-Req ::= SEQUENCE {
    commonPhysicalChannelID   CommonPhysicalChannelID,
    primarySCH-Power          DL-Power,
    tSTD-Indicator            TSTD-Indicator
}

SecondarySCH-Information-Cellsetup-Req ::= SEQUENCE {
    commonPhysicalChannelID   CommonPhysicalChannelID,
    secondarySCH-Power         DL-Power,
    transmitDiversityIndication TransmitDiversityIndication
}

PrimaryCPICH-Information-Cellsetup-Req ::= SEQUENCE {
    commonPhysicalChannelID   CommonPhysicalChannelID,
    primaryCPICH-Power         DL-Power,
    sSTD-Indicator            STTD-Indicator
}

SecondaryCPICH-Information-Cellsetup-Req ::= SEQUENCE {
    commonPhysicalChannelID   CommonPhysicalChannelID,
    dl-ScramblingCode          DL-ScramblingCode,
    secondaryCPICH-Power        DL-Power,
}

```

```

    transmitDiversityIndication TransmitDiversityIndication
}

PrimaryCCPCH-Information-Cellsetup-Req ::= SEQUENCE {
    commonPhysicalChannelID      CommonPhysicalChannelID,
    bCH-information-Cellsetup-Req   BCH-Information-PriCCPCH-Cellsetup-Req,
    sTDD-Indicator            STTD-Indicator
}

BCH-Information-PriCCPCH-Cellsetup-Req ::= SEQUENCE {
    commonTransportChannelID     CommonTransportChannelID,
    bCH-Power                  DL-Power
}

-- *****
-- 
-- CELL SETUP REQUEST TDD
-- 
-- *****

CellSetupRequestTDD ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container {{CellSetupRequestTDD-IEs}}, OPTIONAL,
    protocolExtensions    ProtocolExtensionContainer {{CellSetupRequestTDD-Extensions}}
    ...
}

CellSetupRequestTDD-IES NBAP-PROTOCOL-IES ::= {
    { ID id-LocalCell-ID          CRITICALITY ignore TYPE LocalCell-ID          PRESENCE mandatory }|
    { ID id-C-ID                 CRITICALITY ignore TYPE C-ID                 PRESENCE mandatory }|
    { ID id-ConfigurationGenerationID  CRITICALITY ignore TYPE ConfigurationGenerationID  PRESENCE mandatory }|
    { ID id-UARFCN                CRITICALITY ignore TYPE UARFCN                PRESENCE mandatory }|
    { ID id-Cell-Parameter-ID     CRITICALITY ignore TYPE Cell-Parameter-ID     PRESENCE mandatory }|
    { ID id-MaximumTransmissionPower  CRITICALITY ignore TYPE MaximumTransmissionPower  PRESENCE optional }|
    { ID id-TransmissionDiversityApplied  CRITICALITY ignore TYPE TransmissionDiversityApplied  PRESENCE mandatory }|
    { ID id-SyncCase                CRITICALITY ignore TYPE TransmissionDiversityApplied  PRESENCE mandatory }|
    { ID id-PSCH-Information-CellsetupReqTDD  CRITICALITY ignore TYPE PSCH-Information-CellsetupReqTDD  PRESENCE mandatory }|
    { ID id-PCCPCH-Information-CellsetupReqTDD  CRITICALITY ignore TYPE PCCPCH-Information-CellsetupReqTDD  PRESENCE mandatory }|
    { ID id-TimeSlotConfigurationList-CellsetupReqTDD  CRITICALITY ignore TYPE TimeSlotConfigurationList-CellsetupReqTDD
PRESENCE mandatory
},
    ...
}

CellSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

PSCH-Information-CellsetupReqTDD ::= SEQUENCE {
    commonPhysicalChannelID      CommonPhysicalChannelID,
    syncCaseIndicator           SyncCaseIndicator-CellsetupReqTDD,
}

```

```

pSCH-Power          DL-Power,
tSTD-Indicator      TSTD-Indicator
}

SyncCaseIndicator-CellsetupReqTDD ::= ENUMERATED {
    case1              Case1-CellsetupReqTDD,
    case2andCcase3     Case2andCase3-CellsetupReqTDD
}
}

Case1-CellsetupReqTDD ::= SEQUENCE {
    timeSlot           TimeSlot
}

Case2andCase3-CellsetupReqTDD ::= SEQUENCE {
    PSCH-TimeSlot       PSCH-TimeSlot
}

PCCPCH-Information-CellsetupReqTDD ::= SEQUENCE {
    syncCaseIndicator   SyncCaseIndicator-CellsetupReqTDD2,
    repetitionPeriod    RepetitionPeriod,
    repetitionLength    RepetitionLength,
    pCCPCH-Power        DL-Power,
    tSTD-Indicator       TSTD-Indicator
}

SyncCaseIndicator-CellsetupReqTDD2 ::= ENUMERATED {
    case3               Case3-CellsetupReqTDD
}

Case3-CellsetupReqTDD ::= SEQUENCE {
    timeSlot           TimeSlot
}

TimeSlotConfigurationList-CellsetupReqTDD ::= SEQUENCE (SIZE (1..15)) OF
    ProtocolIE-Container{{TimeSlotConfigurationList-CellsetupReqTDD ItemIE }}

TimeSlotConfigurationList-CellsetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-TimeSlotConfigurationList-CellsetupReqTDDItem      CRITICALITY ignore
    CellsetupReqTDDItem      PRESENCE      mandatory
    },
    ...
}

TimeSlotConfigurationList-CellsetupReqTDDItem ::= SEQUENCE {
    timeSlot             TimeSlot,
    timeSlotStatus        TimeSlotStatus,
    timeSlotDirection     TimeSlotDirection
}

-- ****
-- -->

```

```
-- CELL SETUP RESPONSE
--
-- ****
CellSetupResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CellSetupResponse-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CellSetupResponse-Extensions}}           OPTIONAL,
    ...
}

CellSetupResponse-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-CriticalityDiagnostic      CRITICALITY ignore      TYPE CriticalityDiagnostic      PRESENCE optional
},
...
}

CellSetupResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- CELL SETUP FAILURE
--
-- ****
CellSetupFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container    {{CellSetupFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CellSetupFailure-Extensions}}           OPTIONAL,
    ...
}

CellSetupFailure-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-Cause                CRITICALITY ignore      TYPE Cause                  PRESENCE mandatory }|
{ ID id-CriticalityDiagnostic      CRITICALITY ignore      TYPE CriticalityDiagnostic      PRESENCE optional
},
...
}

CellSetupFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- CELL RECONFIGURATION REQUEST FDD
-- ****
```

```

CellReconfigurationRequestFDD ::= SEQUENCE {
    protocolIEs                  ProtocolIE-Container      {{CellReconfigurationRequestFDD-IEs}},
    protocolExtensions           ProtocolExtensionContainer {{CellReconfigurationRequestFDD-Extensions}}
                                OPTIONAL,
    ...
}

CellReconfigurationRequestFDD-IES NBAP-PROTOCOL-IES ::= {
    { ID id-C-ID                CRITICALITY ignore   TYPE C-ID                  PRESENCE mandatory } |
    { ID id-ConfigurationGenerationID  CRITICALITY ignore   TYPE ConfigurationGenerationID  PRESENCE mandatory } |
    { ID id-MaximumTransmissionPower  CRITICALITY ignore   TYPE MaximumTransmissionPower  PRESENCE optional } |
    { ID id-PrimarySCH-Information-Cellreconf-Req  CRITICALITY ignore   TYPE PrimarySCH-Information-Cellreconf-Req  PRESENCE optional } |
    { ID id-SecondarySCH-Information-Cellreconf-Req CRITICALITY ignore   TYPE SecondarySCH-Information-Cellreconf-Req  PRESENCE optional } |
    { ID id-PrimaryCPICH-Information-Cellreconf-Req CRITICALITY ignore   TYPE PrimaryCPICH-Information-Cellreconf-Req  PRESENCE optional } |
    { ID id-SecondaryCPICH-Information-Cellreconf-Req  CRITICALITY ignore   TYPE SecondaryCPICH-Information-Cellreconf-Req  PRESENCE optional }
    PRESENCE optional
} |
    { ID id-PrimaryCCPCH-Information-Cellreconf-Req CRITICALITY ignore   TYPE PrimaryCCPCH-Information-Cellreconf-Req  PRESENCE optional },
    ...
}

CellReconfigurationRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

PrimarySCH-Information-Cellreconf-Req ::= SEQUENCE {
    commonPhysicalChannelID        CommonPhysicalChannelID,
    primarySCH-Power              DL-Power
}

SecondarySCH-Information-Cellreconf-Req ::= SEQUENCE {
    commonPhysicalChannelID        CommonPhysicalChannelID,
    secondarySCH-Power            DL-Power
}

PrimaryCPICH-Information-Cellreconf-Req ::= SEQUENCE {
    commonPhysicalChannelID        CommonPhysicalChannelID,
    primaryCPICH-Power            DL-Power
}

SecondaryCPICH-Information-Cellreconf-Req ::= SEQUENCE {
    commonPhysicalChannelID        CommonPhysicalChannelID,
    secondaryCPICH-Power          DL-Power
}

PrimaryCCPCH-Information-Cellreconf-Req ::= SEQUENCE {
    bCH-information                BCH-information-Cellreconf-Req
}

BCH-Information-Cellreconf-Req ::= SEQUENCE {
    commonTransportChannelID       CommonTransportChannelID,
    bCH-Power                      DL-Power
}

```

```

}

-- *****
-- CELL RECONFIGURATION REQUEST TDD
-- *****

CellReconfigurationRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CellReconfigurationRequestTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CellReconfigurationRequestTDD-Extensions}}                                OPTIONAL,
    ...
}

CellReconfigurationRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-LocalCell-ID           CRITICALITY ignore TYPE LocalCell-ID           PRESENCE mandatory } |
    { ID id-C-ID                  CRITICALITY ignore TYPE C-ID                  PRESENCE mandatory } |
    { ID id-ConfigurationGeneration-ID  CRITICALITY ignore TYPE ConfigurationGeneration-ID  PRESENCE optional } |
    { ID id-MaximumTransmissionPower CRITICALITY ignore TYPE MaximumTransmissionPower PRESENCE optional } |
    { ID id-PSCH-Information-CellReconfReq  CRITICALITY ignore TYPE PSCH-Information-CellReconfReq  PRESENCE optional } |
    { ID id-PCCPCH-Information-CellReconfReq  CRITICALITY ignore TYPE PCCPCH-Information-CellReconfReq  PRESENCE optional } |
    { ID id-TimeSlotConfigurationList-CellReconfReq CRITICALITY ignore TYPE TimeSlotConfigurationList-CellReconfReq  PRESENCE mandatory },
    ...
}

CellReconfigurationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

PSCH-Information-CellReconfReq ::= SEQUENCE {
    commonPhysicalChannelID  CommonPhysicalChannelID,
    pSCH-Power              PSCH-Power
}

PCCPCH-Information-CellReconfReq ::= SEQUENCE {
    commonPhysicalChannelID  CommonPhysicalChannelID,
    pCCPCH-Power             PCCPCH-Power
}

TimeSlotConfigurationList-CellReconfReq ::= SEQUENCE (SIZE (1..15)) OF
    ProtocolIE-Container {{TimeSlotConfiguration-CellReconfReqItemIE} }

TimeSlotConfiguration-CellReconfReqItemIE NBAP-PROTOCOL-IES ::= {
    { I D id-TimeSlotConfiguration-CellReconfReqItem   CRITICALITY      ignore      TYPE      TimeSlotConfiguration-CellReconfReqItem      PRESENCE
        mandatory
    },
    ...
}

TimeSlotConfiguration-CellReconfReqItem ::= SEQUENCE {

```

```

timeSlot          TimeSlot,
timeSlotStatus    TimeSlotStatus,
timeSlotDirection TimeSlotDirection
}

-- ****
-- 
-- CELL RECONFIGURATION RESPONSE
-- 
-- ****

CellReconfigurationResponse ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container {{CellReconfigurationResponse-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{CellReconfigurationResponse-Extensions}} OPTIONAL,
  ...
}

CellReconfigurationResponse-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-CriticalityDiagnostic      CRITICALITY ignore      TYPE CriticalityDiagnostic      PRESENCE optional
  },
  ...
}

CellReconfigurationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- ****
-- 
-- CELL RECONFIGURATION FAILURE
-- 
-- ****

CellReconfigurationFailure ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container {{CellReconfigurationFailure-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{CellReconfigurationFailure-Extensions}} OPTIONAL,
  privateExtensions    PrivateExtensionContainer {{CellReconfigurationFailure-PrivateExtensions}} OPTIONAL,
  ...
}

CellReconfigurationFailure-IEs NBAP-PROTOCOL-IES ::= {
{ ID id-Cause                CRITICALITY ignore      TYPE Cause                  PRESENCE mandatory }|
{ ID id-CriticalityDiagnostic CRITICALITY ignore      TYPE CriticalityDiagnostic      PRESENCE optional
  },
  ...
}

CellReconfigurationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

```

```

-- ****
-- CELL DELETION REQUEST
--
-- ****

CellDeletionRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CellDeletionRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CellDeletionRequest-Extensions}}           OPTIONAL,
    privateExtensions    PrivateExtensionContainer {{CellDeletionRequest-PrivateExtensions}}     OPTIONAL,
    ...
}

CellDeletionRequest-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-C-ID           CRITICALITY ignore   TYPE C-ID           PRESENCE mandatory },
    ...
}

CellDeletionRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- CELL DELETION RESPONSE
--
-- ****

CellDeletionResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CellDeletionResponse-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{CellDeletionResponse-Extensions}}           OPTIONAL,
    ...
}

CellDeletionResponse-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CriticalityDiagnostic   CRITICALITY ignore   TYPE CriticalityDiagnostic   PRESENCE optional
    },
    ...
}

CellDeletionResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- RESOURCE STATUS INDICATION

```

```

-- ****
ResourceStatusIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{ResourceStatusIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{ResourceStatusIndication-Extensions}} OPTIONAL,
    ...
}

ResourceStatusIndication-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-IndicationType      CRITICALITY ignore TYPE IndicationType      PRESENCE mandatory } |
    { ID id-Cause                CRITICALITY ignore TYPE Cause             PRESENCE mandatory },
    ...
}

ResourceStatusIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

IndicationType ::= ENUMERATED {
    no-Failure           No-Failure,
    serviceImpacting     ServiceImpacting
}
No-Failure ::= SEQUENCE {
    local-CellInformationList-ResourceStatInd      Local-CellInformationList-ResourceStatInd
}
Local-CellInformationList-ResourceStatInd ::= SEQUENCE(SIZE (1..maxLocalCellinNodeB)) OF
    ProtocolIE-Container {{Local-CellInformation-ResourceStatIndItemIE}}
Local-CellInformation-ResourceStatIndItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-Local-CellInformation-ResourceStatIndItem  CRITICALITY ignore TYPE Local-CellInformation-ResourceStatIndItem  PRESENCE mandatory },
    ...
}
Local-CellInformation-ResourceStatIndItem ::= SEQUENCE {
    local-CellID           Local-CellID,
    addOrDeleteIndicator   AddOrDeleteIndicator,
    numberOfChannelElements NumberOfChannelElements,
    maximum-DL-PowerCapability Maximum-DL-PowerCapability
}
ServiceImpacting ::= SEQUENCE {
    local-Cell-InformationList-ResourceStatInd      Local-Cell-InformationList-ResourceStatInd OPTIONAL,
    communicationControlPortInformationList-ResourceStatInd CommunicationControlPortInformationList-ResourceStatInd OPTIONAL,
    cell-InformationList-ResourceStatInd            Cell-InformationList-ResourceStatInd OPTIONAL,
    primary-SCH-Information      P-SCH-Information-Audit-Res OPTIONAL,
}

```

```

secondary-SCH-Information S-SCH-Information-Audit-Res OPTIONAL,
primary-CPICH-Information P-CPICH-Information-Audit-Res OPTIONAL,
secondary-CPICH-Information S-CPICH-Information-Audit-Res OPTIONAL,
primary-CCPCH-Information P-CCPCH-Information-Audit-Res OPTIONAL,
bCH-InformationItem-ResourceStatInd BCH-InformationItem-ResourceStatInd OPTIONAL,
secondary-CCPCH-Information S-CCPCH-Information-Audit-Res OPTIONAL,
pCH-InformationList-ResourceStatInd PCH-InformationList-ResourceStatInd OPTIONAL,
pICH-InformationItem-ResourceStatInd PICH-InformationItem-ResourceStatInd OPTIONAL,
fACH-InformationList-ResourceStatInd FACH-InformationList-ResourceStatInd OPTIONAL,
pRACH-InformationList PRACH-InformationList-Audit-Res OPTIONAL,
rACH-InformationList-ResourceStatInd RACH-InformationList-ResourceStatInd OPTIONAL,
aICH-InformationList-ResourceStatInd AICH-InformationList-ResourceStatInd OPTIONAL,
sCH-InformationList-ResourceStatInd SCH-InformationList-ResourceStatInd OPTIONAL,
pSCH-InformationList PSCH-InformationList-Audit-Res OPTIONAL,
}

Local-Cell-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxLocalCellinNodeB)) OF
ProtocolIE-Container {{Local-Cell-Information-ResourceStatIndItemIE} }

Local-Cell-Information-ResourceStatIndItemIE NBAP-PROTOCOL-IES ::= {
{ ID id-Local-Cell-Information-ResourceStatIndItem CRITICALITY ignore TYPE Local-Cell-Information-ResourceStatIndItem PRESENCE mandatory },
...
}

Local-Cell-Information-ResourceStatIndItem ::= SEQUENCE {
local-CellID Local-CellID,
numberOfChannelElements NumberOfChannelElements OPTIONAL,
maximum-DL-PowerCapability Maximum-DL-PowerCapability OPTIONAL
}

CommunicationControlPortInformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxCCPinNodeB)) OF
ProtocolIE-Container {{CommunicationControlPortInformation-ResourceStatIndItemIE} }

CommunicationControlPortInformation-ResourceStatIndItemIE NBAP-PROTOCOL-IES ::= {
{ ID id-CommunicationControlPortInformation-ResourceStatIndItem
CRITICALITY ignore TYPE CommunicationControlPortInformation-ResourceStatIndItem
PRESENCE mandatory },
...
}

CommunicationControlPortInformation-ResourceStatIndItem ::= SEQUENCE {
communicationControlPortID CommunicationControlPortID,
resourceOperationalState ResourceOperationalState,
availabilityStatus AvailabilityStatus
}

Cell-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxCellinNodeB)) OF
ProtocolIE-Container {{Cell-Information-ResourceStatIndItemIE} }

Cell-Information-ResourceStatIndItemIE NBAP-PROTOCOL-IES ::= {
{ ID id-Cell-Information-ResourceStatIndItem CRITICALITY ignore TYPE Cell-Information-ResourceStatIndItem PRESENCE mandatory},
}

```

```

}

Cell-Information-ResourceStatIndItem ::= SEQUENCE {
    c-ID                  C-ID,
    resourceOperationalState   ResourceOperationalState,
    availabilityStatus        AvailabilityStatus,
    maximumDL-PowerCapability MaximumDL-PowerCapability,
    minimumSpreadingFactor   MinimumSpreadingFactor
}

P-SCH-Information-ResourceStatInd ::= SEQUENCE {
    commonTransportChannelID   CommonTransportChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

S-SCH-Information-ResourceStatInd ::= SEQUENCE {
    commonPhysicalChannelID   CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

P-CPICH-Information-ResourceStatInd ::= SEQUENCE {
    commonPhysicalChannelID   CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

S-CPICH-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxSCPICHCell)) OF
    ProtocolIE-Container {{S-CPICH-InformationItemIE-ResourceStatInd }}

S-CPICH-InformationItemIE-ResourceStatInd NBAP-PROTOCOL-IES ::= {
    { ID id-S-CPICH-InformationItem-ResourceStatInd      CRITICALITY ignore      TYPE S-CPICH-InformationItem-ResourceStatInd PRESENCE mandatory
    },
    ...
}

S-CPICH-InformationItem-ResourceStatInd ::= SEQUENCE {
    commonTransportChannelID   CommonTransportChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

P-CCPCH-Information-ResourceStatInd ::= SEQUENCE {
    commonPhysicalChannelID   CommonPhysicalChannelID,
    resourceOperationState     ResourceOperationState,
    availabilityStatus         AvailabilityStatus
}

BCH-InformationItem-ResourceStatInd ::= SEQUENCE {
}

```

```

commonTransportChannelID      CommonTransportChannelID,
resourceOperationalState     ResourceOperationalState,
availabilityStatus          AvailabilityStatus
}

PCH-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxPChinNodeB)) OF
    ProtocolIE-Container {{PCH-Information-ResourceStatIndItemIE} }

PCH-Information-ResourceStatIndItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-PCH-Information-ResourceStatIndItem CRITICALITY ignore    TYPE PCH-Information-ResourceStatIndItem PRESENCE mandatory},
    ...
}

PCH-Information-ResourceStatIndItem ::= SEQUENCE {
    commonTransportChannelID      CommonTransportChannelID,
    resourceOperationalState     ResourceOperationalState,
    availabilityStatus          AvailabilityStatus
}

PICH-InformationItem-ResourceStatInd ::= SEQUENCE {
    commonPhysicalChannelID      CommonPhysicalChannelID,
    resourceOperationalState     ResourceOperationalState,
    availabilityStatus          AvailabilityStatus
}

FACH-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxFACHCell)) OF
    ProtocolIE-Container {{FACH-Information-ResourceStatIndItemIE} }

FACH-Information-ResourceStatIndItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-FACH-Information-ResourceStatIndItem    CRITICALITY ignore    TYPE FACH-Information-ResourceStatIndItem PRESENCE mandatory},
    ...
}

FACH-Information-ResourceStatIndItem ::= SEQUENCE {
    commonTransportChannelID      CommonTransportChannelID,
    resourceOperationalState     ResourceOperationalState,
    availabilityStatus          AvailabilityStatus
}

PRACH-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxPRACHCell)) OF
    ProtocolIE-Container {{PRACH-InformationItemIE-ResourceStatInd} }

PRACH-InformationItemIE-ResourceStatInd NBAP-PROTOCOL-IES ::= {
    { ID id-PRACH-InformationItem-ResourceStatInd      CRITICALITY ignore    TYPE PRACH-InformationItem-ResourceStatInd PRESENCE mandatory },
    ...
}

PRACH-InformationItem-ResourceStatInd ::= SEQUENCE {
    commonPhysicalChannelID      CommonPhysicalChannelID,
    resourceOperationState       ResourceOperationState,
    availabilityStatus          AvailabilityStatus
}

```

```

}

RACH-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxRACHCell)) OF
    ProtocolIE-Container {{RACH-Information-ResourceStatIndItemIE} }

RACH-Information-ResourceStatIndItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RACH-Information-ResourceStatIndItem   CRITICALITY ignore   TYPE RACH-Information-ResourceStatIndItem   PRESENCE mandatory},
    ...
}

RACH-Information-ResourceStatIndItem ::= SEQUENCE {
    commonTransportChannelID      CommonTransportChannelID,
    resourceOperationalState     ResourceOperationalState,
    availabilityStatus           AvailabilityStatus
}

AICH-InformationList-ResourceStatInd ::= SEQUENCE (SIZE (1..maxAICHCell)) OF
    ProtocolIE-Container {{AICH-Information-ResourceStatIndItemIE} }

AICH-Information-ResourceStatIndItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-AICH-Information-ResourceStatIndItem   CRITICALITY ignore   TYPE AICH-Information-ResourceStatIndItem   PRESENCE mandatory},
    ...
}

AICH-Information-ResourceStatIndItem ::= SEQUENCE {
    commonPhysicalChannelID      CommonPhysicalChannelID,
    resourceOperationalState     ResourceOperationalState,
    availabilityStatus           AvailabilityStatus
}

SCH-Information-ResourceStatInd ::= SEQUENCE {
    commonTransportChannelID      CommonTransportChannelID,
    resourceOperationalState     ResourceOperationalState,
    availabilityStatus           AvailabilityStatus
}

PSCH-Information-ResourceStatInd ::= SEQUENCE {
    commonPhysicalChannelID      CommonPhysicalChannelID,
    resourceOperationalState     ResourceOperationalState,
    availabilityStatus           AvailabilityStatus
}

-- ****
-- 
-- SYSTEM INFORMATION UPDATE REQUEST
-- 
-- ****

SystemInformationUpdateRequest ::= SEQUENCE {
    protocolIEs                  ProtocolIE-Container {{SystemInformationUpdateRequest-IEs}},
    ...
}

```

```

protocolExtensions          ProtocolExtensionContainer {{SystemInformationUpdateRequest-Extensions}}
                           OPTIONAL,
...
}

SystemInformationUpdateRequest-IES NBAP-PROTOCOL-IES ::= {
  { ID id-C-ID           CRITICALITY ignore      TYPE C-ID           PRESENCE mandatory } |
  { ID id-BCCH-ModificationTime   CRITICALITY ignore      TYPE BCCH-ModificationTime   PRESENCE mandatory } |
{ ID id-MIB-SIB-InformationList-SystemInfoUpdate   CRITICALITY ignore      TYPE    MIB-SIB-InformationList-SystemInfoUpdate
PRESENCE optional
},
...
}

SystemInformationUpdateRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
...
}

MIB-SIB-InformationList-SystemInfoUpdate ::= SEQUENCE (SIZE (1..maxIB)) OF
ProtocolIE-Container{{ MIB-SIB-InformationList-SystemInfoUpdateItemIE }}

MIB-SIB-InformationList-SystemInfoUpdateItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-MIB-SIB-InformationList-SystemInfoUpdateItem   CRITICALITY ignore      TYPE    MIB-SIB-InformationList-SystemInfoUpdateItem
PRESENCE optional
},
...
}

MIB-SIB-InformationList-SystemInfoUpdateItem ::= SEQUENCE {
iB-Type           IB-Type,
sIB-DeletionIndicator   SIB-DeletionIndicator-SystemInfoUpdate
}

SIB-DeletionIndicator-SystemInfoUpdate ::= ENUMERATED {
  no-Delition      No-Delitionist-SystemInfoUpdate
}

No-DelitionList-SystemInfoUpdate ::= SEQUENCE (SIZE (1..maxIBSEG)) OF
ProtocolIE-Container{{ No-DelitionList-SystemInfoUpdateItemIE }}

No-DelitionList-SystemInfoUpdateItemIE NBAP-PROTOCOL-IES ::= {
  { ID id- No-DelitionList-SystemInfoUpdate   CRITICALITY ignore      TYPE No-DelitionList-SystemInfoUpdate   PRESENCE optional },
...
}

No-DelitionList-SystemInfoUpdate ::= SEQUENCE {
sIB-Originator      sIB-Originator      OPTIONAL,
segmentInformation   SegmentInformation-SystemInfoUpdate
}

SegmentInformation-SystemInfoUpdate ::= SEQUENCE (SIZE (1..maxIBSEG)) OF

```

```

ProtocolIE-Container{{ SegmentInformation-SystemInfoUpdateItemIE }}

SegmentInformation-SystemInfoUpdateItemIE NBAP-PROTOCOL-IES ::= {
  { ID id- SegmentInformation-SystemInfoUpdateItem           CRITICALITY ignore      TYPE      SegmentInformation-SystemInfoUpdateItem      PRESENCE
    optional
  },
  ...
}

SegmentInformation-SystemInfoUpdateItem ::= SEQUENCE {
  segmentType          SegmentType,
  iB-SG-REP            IB-SG-REP,
  iB-SG-POS            IB-SG-POS,
  iB-SG                IB-SG      OPTIONAL
}

-- *****
-- 
-- SYSTEM INFORMATION UPDATE RESPONSE
-- 
-- *****

SystemInformationUpdateResponse ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container      {{SystemInformationUpdateResponse-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{SystemInformationUpdateResponse-Extensions}}           OPTIONAL,
  ...
}

SystemInformationUpdateResponse-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-CriticalityDiagnostic           CRITICALITY ignore      TYPE CriticalityDiagnostic      PRESENCE optional
    },
  ...
}

SystemInformationUpdateResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- SYSTEM INFORMATION UPDATE FAILURE
-- 
-- *****

SystemInformationUpdateFailure ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container      {{SystemInformationUpdateFailure-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{SystemInformationUpdateFailure-Extensions}}           OPTIONAL,
  ...
}

```

```

SystemInformationUpdateFailure-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-Cause           CRITICALITY ignore   TYPE Cause           PRESENCE mandatory } |
    { ID id-CriticalityDiagnostic   CRITICALITY ignore   TYPE CriticalityDiagnostic   PRESENCE optional
    },
    ...
}

SystemInformationUpdateFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- RADIO LINK SETUP REQUEST FDD
-- *****

RadioLinkSetupRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container     {{RadioLinkSetupRequestFDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupRequestFDD-Extensions}}           OPTIONAL,
    ...
}

RadioLinkSetupRequestFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID   CRITICALITY ignore   TYPE CRNC-CommunicationContextID   PRESENCE mandatory } |
    { ID id-UL-DPCH-InformationItem-RL-SetupReq-FDD CRITICALITY ignore   TYPE UL-DPCH-InformationItem-RL-SetupReq-FDD   PRESENCE mandatory } |
    { ID id-DL-DPCH-InformationItem-RL-SetupReq-FDD CRITICALITY ignore   TYPE DL-DPCH-InformationItem-RL-SetupReq-FDD   PRESENCE mandatory } |
    { ID id-DCH-InformationList-RL-SetupReq-FDD CRITICALITY ignore   TYPE DCH-InformationList-RL-SetupReq-FDD   PRESENCE mandatory } |
    { ID id-RL-ID             CRITICALITY ignore   TYPE RL-ID             PRESENCE optional } |
    { ID id-DSCH-ID           CRITICALITY ignore   TYPE DSCH-ID           PRESENCE optional } |
    { ID id-DSCH-InformationList-RL-SetupReq-FDD CRITICALITY ignore   TYPE DSCH-InformationList-RL-SetupReq-FDD   PRESENCE optional } |
    { ID id-RL-InformationList-RL-SetupReq-FDD CRITICALITY ignore   TYPE RL-InformationList-RL-SetupReq-FDD   PRESENCE mandatory },
    ...
}

RadioLinkSetupRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-DPCH-InformationItem-RL-SetupReq-FDD ::= SEQUENCE {
    ul-ScramblingCode      UL-ScramblingCode,
    minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength,
    maxNumberOfUL-DPDCHs    MaxNumberOfUL-DPDCHs   OPTIONAL
    -- This IE is present only if "Min UL Channelisation Code length" equals to 4 --
    ul-PunctureLimit       UL-PunctureLimit,
    transportFormatCombinationSet TransportFormatCombinationSet,
    ul-DPCCH-SlotFormat    UL-DPCCH-SlotFormat,
    ul-EbNo-Target          UplinkEbNo,
}

```

```

diversityMode          DiversityMode,
d-FieldLength         D-FieldLength      OPTIONAL
-- This IE is present only if Feed Back mode diversity is activated -- ,
sSDT-Cell-IDLength   SSDT-Cell-IDLength OPTIONAL,
s-FieldLength         S-FieldLength      OPTIONAL
}

DL-DPCH-InformationItem-RL-SetupReq-FDD ::= SEQUENCE {
    transportFormatCombinationSet   TransportFormatCombinationSet,
    dl-DPCH-SlotFormat            DL-DPCH-SlotFormat,
    tFCI-SignallingMode          TFCI-SignallingMode,
    multiplexingPosition         MultiplexingPosition,
    tFCI-Presence                TFCI-Presence,
    powerOffsetInformationItem-RL-SetupReq-FDD
        PowerOffsetInformationitem-RL-SetupReq-FDD,
    deltaTPC                     DeltaTPC
}

PowerOffsetInformationItem-RL-SetupReq-FDD ::= SEQUENCE {
    p01             PowerOffset,
    p02             PowerOffset,
    p03             PowerOffset
}

DCH-InformationList-RL-SetupReq-FDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
    ProtocolIE-Container{{DCH-Information-RL-SetupReq-FDDItemIE }}

DCH-Information-RL-SetupReq-FDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-Information-RL-SetupReq-FDDItem CRITICALITY ignore    TYPE DCH-Information-RL-SetupReq-FDDItem PRESENCE mandatory    },
    ...
}

DCH-Information-RL-SetupReq-FDDItem ::= SEQUENCE {
    dCH-ID           DCH-ID,
    dCH-CombinationIndication DCH-CombinationIndication OPTIONAL,
    rLC-Mode         RLC-Mode,
    ul-TransportFormatSet   TransportFormatSet,
    dl-TransportFormatSet   TransportFormatSet,
    frameHandlingPriority FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode        UL-FP-Mode,
    toAWS            ToAWS,
    toAWE            ToAWE
}

DSCH-InformationList-RL-SetupReq-FDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
    ProtocolIE-Container{{DSCH-Information-RL-SetupReq-FDDItemIE }}

DSCH-Information-RL-SetupReq-FDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DSCH-Information-RL-SetupReq-FDDItem    CRITICALITY ignore    TYPE DSCH-Information-RL-SetupReq-FDDItem PRESENCE mandatory    },
    ...
}

```

```

}

DSCH-Information-RL-SetupReq-FDDItem ::= SEQUENCE {
    dSCH-ID          DSCH-ID,
    dSCH-TransportFormatSet   DSCH-TransportFormatSet,
    frameHandlingPriority     FrameHandlingPriority,
    toAWS                ToAWS,
    toAWE                ToAWE
}

RL-InformationList-RL-SetupReq-FDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container{{RL-Information-RL-SetupReq-FDDItemIE }}

RL-Information-RL-SetupReq-FDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-SetupReq-FDDItem   CRITICALITY ignore   TYPE RL-Information-RL-SetupReq-FDDItem      PRESENCE optional },
    ...
}

RL-Information-RL-SetupReq-FDDItem ::= SEQUENCE {
    rL-ID            RL-ID,
    c-ID             C-ID,
    frameOffset      FrameOffset,
    chipOffset       ChipOffset,
    propagationDelay PropagationDelay,
    diversityControlField DiversityControlField OPTIONAL,
    -- This IE is present only if the RL is not the first one in the RL Information
    dl-CodeInformationList-RL-SetupReqFDD           DL-CodeInformationList-RL-SetupReqFDD,
    initialDL-transmissionPower DL-Power,
    maximumDL-power        DL-Power,
    minimumDL-power        DL-Power,
    ssDT-CellIdentity     SSDT-CellIdentity OPTIONAL
}

DL-CodeInformationList-RL-SetupReqFDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container{{DL-CodeInformation-RL-SetupReqFDDItemIE }}

DL-CodeInformation-RL-SetupReqFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-CodeInformation-RL-SetupReqFDDItem   CRITICALITY ignore   TYPE DL-CodeInformation-RL-SetupReqFDDItem PRESENCE optional },
    ...
}

DL-CodeInformation-RL-SetupReqFDDItem ::= SEQUENCE {
    dl-ScramblingCode      DL-ScramblingCode,
    fdd-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber
}

-- ****
--
-- RADIO LINK SETUP REQUEST TDD
--
-- ****

```

```

RadioLinkSetupRequestTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container      {{RadioLinkSetupRequestTDD-IES}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupRequestTDD-Extensions}}                                OPTIONAL,
    ...
}

RadioLinkSetupRequestTDD-IES NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID   CRITICALITY ignore   TYPE CRNC-CommunicationContextID   PRESENCE mandatory }|
    { ID id-UL-CCTrCH-InformationList-RL-SetupReqTDD CRITICALITY ignore   TYPE UL-CCTrCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
    { ID id-DL-CCTrCH-InformationList-RL-SetupReqTDD CRITICALITY ignore   TYPE DL-CCTrCH-InformationList-RL-SetupReqTDD PRESENCE optional }|
    { ID id-DCH-InformationList-RL-SetupReqTDD CRITICALITY ignore   TYPE DCH-InformationList-RL-SetupReqTDD   PRESENCE optional }|
    { ID id-DSCH-InformationList-RL-SetupReqTDD CRITICALITY ignore   TYPE DSCH-InformationList-RL-SetupReqTDD   PRESENCE optional }|
    { ID id-USCH-InformationList-RL-SetupReqTDD CRITICALITY ignore   TYPE USCH-InformationList-RL-SetupReqTDD   PRESENCE optional }|
    { ID id-RL-InformationItem-RL-SetupReqTDD   CRITICALITY ignore   TYPE RL-InformationItem-RL-SetupReqTDD   PRESENCE mandatory },
    ...
}

RadioLinkSetupRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-CCTrCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE(1..maxnoofCCTrCHs)) OF
    ProtocolIE-Container{{UL-CCTrCH-Information-RL-SetupReqTDDItemIE }}

UL-CCTrCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-UL-CCTrCH-Information-RL-SetupReqTDDItem CRITICALITY ignore   TYPE UL-CCTrCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
    ...
}

UL-CCTrCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    cCTrCH-ID           CTrCH-ID,
    transportFormatCombinationSet TransportFormatCombinationSet,
    tFCI-Coding         TFCI-Coding,
    puncturing-Limit    Puncturing-Limit,
    ul-DPCH-InformationList-RL-SetupReqTDD   UL-DPCH-InformationList-RL-SetupReqTDD   OPTIONAL
}
}

UL-DPCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
    ProtocolIE-Container{{UL-DPCH-Information-RL-SetupReqTDDItemIE }}

UL-DPCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-UL-DPCH-Information-RL-SetupReqTDDItem CRITICALITY ignore   TYPE UL-DPCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
    ...
}

UL-DPCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    dPCH-ID             DPCH-ID,
    ...
}

```

```

tdd-ChannelisationCode      TDD-ChannelisationCode,
burstType                  BurstType,
midambleShift              MidambleShift,
timeSlot                   TimeSlot,
tdd-PhysicalChannelOffset  TDD-PhysicalChannelOffset,
repetitionPeriod            RepetitionPeriod,
repetitionLength            RepetitionLength,
tFCI-Presence              TFCI-Presence
}

DL-CCTrCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoCCTrCHs)) OF
ProtocolIE-Container{{DL-CCTrCH-Information-RL-SetupReqTDDItemIE }}

DL-CCTrCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-CCTrCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE DL-CCTrCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
  ...
}

DL-CCTrCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
  cCTrCH-ID                CCTrCH-ID,
  transportFormatCombinationSet TransportFormatCombinationSet,
  tFCI-Coding               TFCI-Coding,
  puncturing-Limit          Puncturing-Limit,
  dl-DPCH-InformationList-RL-SetupReqTDD           DL-DPCH-InformationList-RL-SetupReqTDD   OPTIONAL
}

DL-DPCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
ProtocolIE-Container{{DL-DPCH-Information-RL-SetupReqTDDItemIE }}

DL-DPCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-DPCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE DL-DPCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
  ...
}

DL-DPCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
  dPCH-ID                  DPCH-ID,
  tdd-ChannelisationCode   TDD-ChannelisationCode,
  burstType                 BurstType,
  midambleShift             MidambleShift,
  timeSlot                  TimeSlot,
  tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
  repetitionPeriod           RepetitionPeriod,
  repetitionLength           RepetitionLength,
  tFCI-Presence              TFCI-Presence
}

DCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
ProtocolIE-Container{{DCH-Information-RL-SetupReqTDDItemIE }}

DCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE DCH-Information-RL-SetupReqTDDItem PRESENCE mandatory },
  ...
}

```

```

}

DCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    ul-CCTrCH-ID          UL-CCTrCH-ID,
    dl-CCTrCH-ID          DL-CCTrCH-ID,
    dCH-CombinationIndication DCH-CombinationIndication OPTIONAL,
    ul-TransportFormatSet   TransportFormatSet,
    dl-TransportFormatSet   TransportFormatSet,
    frameHandlingPriority   FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode              UL-FP-Mode,
    toAWE                  ToAWE,
    toAWS                  ToAWS
}

DSCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
    ProtocolIE-Container{ {DSCH-Information-RL-SetupReqTDDItemIE} }

DSCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    {ID id-DCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE DSCH-Information-RL-SetupReqTDDItem PRESENCE mandatory}
    ...
}

DSCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    dSCH-ID                DSCH-ID,
    cCTrCH-ID               CCTrCH-ID,
    transportFormatSet      TransportFormatSet,
    frameHandlingPriority   FrameHandlingPriority,
    toAWE                  ToAWE,
    toAWS                  ToAWS
}

USCH-InformationList-RL-SetupReqTDD ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
    ProtocolIE-Container{ {USCH-Information-RL-SetupReqTDDItemIE} }

USCH-Information-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    {ID id-USCH-Information-RL-SetupReqTDDItem CRITICALITY ignore TYPE USCH-Information-RL-SetupReqTDDItem PRESENCE mandatory}
    ...
}

USCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
    uSCH-ID                USCH-ID,
    cCTrCH-ID               CCTrCH-ID,
    transportFormatSet      TransportFormatSet
}

RL-Information-RL-SetupReqTDD ::= SEQUENCE {
    rL-ID                  RL-ID,
    c-ID                   C-ID,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
}

```

```

initialDL-transmissionPower      DL-Power,
maximumDL-power                 DL-Power,
minimumDL-power                 DL-Power
}

-- ****
-- 
-- RADIO LINK SETUP RESPONSE FDD
-- 
-- ****

RadioLinkSetupResponseFDD ::= SEQUENCE {
    protocolIEs                  ProtocolIE-Container {{RadioLinkSetupResponseFDD-IEs}},
    protocolExtensions            ProtocolExtensionContainer {{RadioLinkSetupResponseFDD-Extensions}}                                OPTIONAL,
    ...
}

RadioLinkSetupResponseFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID   CRITICALITY ignore   TYPE CRNC-CommunicationContextID   PRESENCE mandatory   }|
    { ID id-NodeB-CommunicationContextID   CRITICALITY ignore   TYPE NodeB-CommunicationContextID   PRESENCE mandatory   }|
    { ID id-CommunicationControlPortID    CRITICALITY ignore   TYPE CommunicationControlPortID    PRESENCE mandatory   }|
    { ID id-RL-InformationResponseList-RL-setupResFDD   CRITICALITY ignore   TYPE RL-InformationResponseList-RL-setupResFDD PRESENCE mandatory   }|
}
{ ID id-CriticalityDiagnostic       CRITICALITY ignore   TYPE CriticalityDiagnostic        PRESENCE optional
},
...
}

RadioLinkSetupResponseFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-InformationResponseList-RL-setupResFDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
ProtocolIE-Container{{RL-InformationResponse-RL-setupResFDDItemIE} }

RL-InformationResponse-RL-setupResFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RL-InformationResponse-RL-setupResFDDItem CRITICALITY ignore   TYPE RL-InformationResponse-RL-setupResFDDItem  PRESENCE mandatory   },
    ...
}

RL-InformationResponse-RL-setupResFDDItem ::= SEQUENCE {
    rL-ID                      RL-ID,
    ul-InterferenceLevel       UL-InterferenceLevel,
    diversityIndication        DiversityIndication OPTIONAL,
-- This IE is present only if the RL is not the first one in the RL Information
    dSCH-InformationResponse-RL-setupResFDD          DSCH-InformationResponse-RL-setupResFDD      OPTIONAL,
    ssDT-SupportIndicator      SSDT-SupportIndicator
}

DiversityIndication ::= ENUMERATED {

```

```

combining          CombiningItem,
non-Combining     Non-CombiningItem
}

CombiningItem ::= SEQUENCE {
    dCH-ID           DCH-ID
}

Non-CombiningItem ::= SEQUENCE {
    dCH-InformationResponse-RL-setupResFDD           DCH-InformationResponse-RL-setupResFDD           OPTIONAL
}

DCH-InformationResponseList-RL-setupResFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
    ProtocolIE-Container{ {DCH-InformationResponse-RL-setupResFDDItemIE} }

DCH-InformationResponse-RL-setupResFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DSCH-InformationResponse-RL-setupResFDDItem   CRITICALITY ignore TYPE DCH-InformationResponse-RL-setupResFDDItem PRESENCE mandatory
        },
    ...
}

DCH-InformationResponse-RL-setupResFDDItem ::= SEQUENCE {
    dCH-ID           DCH-ID,
    bindingID        BindingID,
    transportLayerAddress TransportLayerAddress
}

DSCH-InformationResponseList-RL-setupResFDD ::= SEQUENCE (SIZE (1..numofDSCH)) OF
    ProtocolIE-Container{ {DSCH-InformationResponse-RL-setupResFDDItemIE} }

-- ** TODO **
numofDSCH INTEGER ::= 10

DSCH-InformationResponse-RL-setupResFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DSCH-InformationResponse-RL-setupResFDDItem   CRITICALITY ignore      TYPE DSCH-InformationResponse-RL-setupResFDDItem
        PRESENCE mandatory
    },
    ...
}

DSCH-InformationResponse-RL-setupResFDDItem ::= SEQUENCE {
    dSCH-ID           DSCH-ID,
    bindingID        BindingID,
    transportLayerAddress TransportLayerAddress
}

-- ****
-- 
-- RADIO LINK SETUP RESPONSE TDD
-- 
-- ****

```

```

RadioLinkSetupResponseTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container     {{RadioLinkSetupResponseTDD-IEs}} ,
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupResponseTDD-Extensions}}                               OPTIONAL,
    ...
}

RadioLinkSetupResponseTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID      CRITICALITY ignore      TYPE CRNC-CommunicationContextID      PRESENCE mandatory } |
    { ID id-NodeB-CommunicationContextID      CRITICALITY ignore      TYPE NodeB-CommunicationContextID      PRESENCE mandatory } |
    { ID id-CommunicationControlPortID       CRITICALITY ignore      TYPE CommunicationControlPortID      PRESENCE mandatory } |
    { ID id-RL-Information-RL-setupResTDD    CRITICALITY ignore      TYPE RL-Information-RL-setupResTDD    PRESENCE mandatory } |
    { ID id-DSCH-InformationResponseList-RL-setupResTDD  CRITICALITY ignore      TYPE DSCH-InformationResponseList-RL-setupResTDD PRESENCE optional
    } |
    { ID id-USCH-InformationResponseList-RL-setupResTDD  CRITICALITY ignore      TYPE USCH-InformationResponseList-RL-setupResTDD PRESENCE optional
    } |
    { ID id-CriticalityDiagnostic           CRITICALITY ignore      TYPE CriticalityDiagnostic        PRESENCE optional
    },
    ...
}

RadioLinkSetupResponseTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-InformationResponseList-RL-setupResTDD ::= SEQUENCE {
    rL-ID                  RL-ID,
    ul-InterferenceLevel   UL-InterferenceLevel,
    dCH-InformationResponseList-RL-setupResTDD
                                DCH-InformationResponseList-RL-setupResTDD
}
DCH-InformationResponseList-RL-setupResTDD ::= SEQUENCE (SIZE (1..maxnumofDCHs)) OF ProtocolIE-Container{{DCH-InformationResponse-RL-setupResTDDItemIE
} }

DCH-InformationResponse-RL-setupResFDDItemIE NBAP-PROTOCOL-IES ::= {
    { I D id-DCH-InformationResponse-RL-setupResTDDItem CRITICALITY      ignore      TYPE DCH-InformationResponse-RL-setupResTDDItem  PRESENCE
mandatory
},
    ...
}

DCH-InformationResponse-RL-setupResTDDItem ::= SEQUENCE {
    dCH-ID                DCH-ID,
    bindingID             BindingID,
    transportLayerAddress TransportLayerAddress
}

DSCH-InformationResponseList-RL-SetupResTDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF      ProtocolIE-Container{{DSCH-InformationResponse-RL-
SetupResTDDItemIE}}

```

```

DSCH-Informationresponse-RL-SetupResTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-InformationResponse-RL-SetupResTDDItem   CRITICALITY ignore      TYPE   DSCH-Informationresponse-RL-SetupReqTDDItem   PRESENCE mandatory
}
...
}

DSCH-Information-RL-SetupReqTDDItem ::= SEQUENCE {
  dSCH-ID           DSCH-ID,
  binding-ID        Binding-ID,
  transport-Layer-Address   Transport-Layer-Address
}

USCH-InformationResponseList-RL-SetupResTDD ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF      ProtocolIE-Container{{USCH-InformationResponse-RL-
SetupResTDDItemIE}}
```

USCH-Informationresponse-RL-SetupReqTDDItemIE NBAP-PROTOCOL-IES ::= {
 { ID id-USCH-InformationResponse-RL-SetupReqTDDItem CRITICALITY ignore TYPE USCH-InformationResponse-RL-SetupReqTDDItem PRESENCE
mandatory
}
...
}

```

USCH-InformationResponse-RL-SetupReqTDDItem ::= SEQUENCE {
  uSCH-ID           USCH-ID,
  binding-ID        Binding-ID,
  transport-Layer-Address   Transport-Layer-Address
}

-- ****
-- 
-- RADIO LINK SETUP FAILURE FDD
-- 
-- ****

RadioLinkSetupFailureFDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container    {{RadioLinkSetupFailureFDD-IEs}},
  protocolExtensions   ProtocolExtensionContainer {{RadioLinkSetupFailureFDD-Extensions}}           OPTIONAL,
...
}

RadioLinkSetupFailureFDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-CRNC-CommunicationContextID   CRITICALITY ignore      TYPE CRNC-CommunicationContextID   PRESENCE mandatory }|
  { ID id-NodeB-CommunicationContextID   CRITICALITY ignore      TYPE NodeB-CommunicationContextID   PRESENCE mandatory }|
{ I D id-CommunicationControlPortID   CRITICALITY ignore
TYPE CommunicationControlPortID   PRESENCE mandatory }|
  { ID id-Unsuccessful-RL-InformationResponseList-RL-SetupFailFDD
CRITICALITY ignore               TYPE   Unsuccessful-RL-InformationResponseList-RL-SetupFailFDD
PRESENCE mandatory }|
  { ID id-Successful-RL-InformationResponseList-RL-SetupFailFDD
CRITICALITY ignore               TYPE   Successful-RL-InformationResponseList-RL-SetupFailFDD
PRESENCE optional }|

```

```

{ ID id-CriticalityDiagnostic          CRITICALITY ignore      TYPE CriticalityDiagnostic      PRESENCE optional
  },
  ...
}

RadioLinkSetupFailureFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

Unsuccessful-RL-InformationResponseList-RL-SetupFailFDD ::=           SEQUENCE (SIZE (1..maxnoofRLs)) OF
ProtocolIE-Container    {{Unsuccessful-RL-InformationResponse-RL-SetupFailFDDItemIE }}

Unsuccessful-RL-InformationResponse-RL-SetupFailFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-Unsuccessful-RL-InformationResponse-RL-SetupFailFDDItem
    CRITICALITY ignore              TYPE    Unsuccessful-RL-InformationResponse-RL-SetupFailFDDItem
    PRESENCE     optional           },
  ...
}

Unsuccessful-RL-InformationResponse-RL-SetupFailFDDItem ::= SEQUENCE {
  rL-ID           RL-ID,
  cause          Cause
}

Successful-RL-InformationResponseList-RL-SetupFailFDD ::= SEQUENCE      (SIZE (1.. maxnoofRLs-1)) OF
ProtocolIE-Container    {{Successful-RL-InformationResponse-RL-SetupFailFDDItemIE }}

Successful-RL-InformationResponse-RL-SetupFailFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-Successful-RL-InformationResponse-RL-SetupFailFDDItem
    CRITICALITY ignore              TYPE    Successful-RL-InformationResponse-RL-SetupFailFDDItem
    PRESENCE     optional           },
  ...
}

Successful-RL-InformationResponse-RL-SetupFailFDDItem ::= SEQUENCE {
  rL-ID           RL-ID,
  ul-InterferenceLevel      UL-InterferenceLevel,
  diversityIndication       DiversityIndication,
  dSCH-InformationResponseList-RL-SetupFailFDD          DSCH-InformationResponseList-RL-SetupFailFDD  OPTIONAL,
  ssDT-SupportIndicator     SSDT-SupportIndicator
}

DiversityIndicationRL-SetupFailFDD ::= ENUMERATED {
  combining        Combining-RL-SetupFailFDD,
  non-combining   Non-CombiningRL-SetupFailFDD
}

Combining-RL-SetupFailFDD ::= SEQUENCE {
  rL-ID           RL-ID
}

```

```

}

Non-Combining-RL-SetupFailFDD ::= SEQUENCE {
    dCH-InformationResponseList-RL-SetupFailFDD
} DCH-InformationResponseList-RL-SetupFailFDD OPTIONAL

DCH-InformationResponseList-RL-SetupFailFDD ::= SEQUENCE (SIZE (1.. maxnoofDCHs)) OF
    ProtocolIE-Container{{DCH-InformationResponse-RL-SetupFailFDDItemIE } }

DCH-InformationResponse-RL-SetupFailFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-InformationResponse-RL-SetupFailFDDItem CRITICALITY      ignore      TYPE      DCH-InformationResponse-RL-SetupFailFDDItem      PRESENCE
        mandatory
    },
    ...
}

DCH-InformationResponse-RL-SetupFailFDDItem ::= SEQUENCE {
    dCH-ID
        DCH-ID,
    bindingID
        BindingID,
    transportLayerAddress
        TransportLayerAddress
}
DSCH-InformationResponseList-RL-SetupFailFDD ::= SEQUENCE (SIZE (1..numofDSCH)) OF
    ProtocolIE-Container{{DSCH-InformationResponse-RL-SetupFailFDDItemIE } }

DSCH-InformationResponse-RL-SetupFailFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DSCH-InformationResponse-RL-SetupFailFDDItem      CRITICALITY      ignore      TYPE      DSCH-InformationResponse-RL-SetupFailFDDItem
        PRESENCE      mandatory
    },
    ...
}

DSCH-InformationResponse-RL-SetupFailFDDItem ::= SEQUENCE {
    dSCH-ID
        DSCH-ID,
    bindingID
        BindingID,
    transportLayerAddress
        TransportLayerAddress
}
-- ****
-- 
-- RADIO LINK SETUP FAILURE TDD
-- 
-- ****

RadioLinkSetupFailureTDD ::= SEQUENCE {
    protocolIEs
        ProtocolIE-Container {{RadioLinkSetupFailureTDD-IEs}},
    protocolExtensions
        ProtocolExtensionContainer {{RadioLinkSetupFailureTDD-Extensions}}
} OPTIONAL,
    ...

RadioLinkSetupFailureTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID      CRITICALITY ignore      TYPE CRNC-CommunicationContextID PRESENCE mandatory
    } |
    { ID id-Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD CRITICALITY ignore
    }
}
```

```

TYPE    Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD
PRESENCE  mandatory
}|
{ ID id-CriticalityDiagnostic          CRITICALITY ignore      TYPE CriticalityDiagnostic      PRESENCE optional
  },
  ...
}

RadioLinkSetupFailureTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD ::= SEQUENCE {
  rL-ID           RL-ID,
  cause           Cause
}

-- *****
-- 
-- RADIO LINK ADDITION REQUEST FDD
-- 
-- *****

RadioLinkAdditionRequestFDD ::= SEQUENCE {
  protocolIEs        ProtocolIE-Container   {{RadioLinkAdditionRequestFDD-IEs}},
  protocolExtensions ProtocolExtensionContainer {{RadioLinkAdditionRequestFDD-Extensions}}          OPTIONAL,
  ...
}

RadioLinkAdditionRequestFDD-IES NBAP-PROTOCOL-IES ::= {
  { ID id-NodeB-CommunicationContextID      CRITICALITY ignore      TYPE NodeB-CommunicationContextID      PRESENCE mandatory } |
  { ID id-RL-InformationList-RL-Add-ReqFDD   CRITICALITY ignore      TYPE RL-InformationList-RL-Add-ReqFDD      PRESENCE optional },
  ...
}

RadioLinkAdditionRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

RadioLinkAdditionRequestFDD-PrivateExtensions NBAP-PRIVATE-EXTENSION ::= {
  ...
}

RL-InformationList-RL-Add-ReqFDD ::= SEQUENCE (SIZE (1..maxnoofRL-1)) OF
  ProtocolIE-Container {{RL-informationList-RL-Add-ReqFDDItemIE} }

RL-InformationList-RL-Add-ReqFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationList-RL-Add-ReqFDDItem   CRITICALITY ignore      TYPE RL-InformationList-RL-Add-ReqFDDItem  PRESENCE mandatory },
  ...
}

```

```

RL-InformationList-RL-Add-ReqFDDItem ::= SEQUENCE {
    rL-ID                  RL-ID,
    c-ID                   C-ID,
    frameOffset            FrameOffset,
    chipOffset              ChipOffset,
    diversityControlField  DiversityControlField,
    dl-CodeInformationList-RL-Add-ReqFDD
    initialDL-TransmissionPower DL-Power,
    maximumDL-Power        DL-Power      OPTIONAL,
    minimumDL-Power         DL-Power      OPTIONAL,
    sSDT-CellIdentity       SSDT-CellIdentity   OPTIONAL
}

DL-CodeInformationList-RL-Add-ReqFDD ::= SEQUENCE (SIZE (1..maxnoofDLCodes)) OF
    ProtocolIE-Container {{ DL-CodeInformationList-RL-Add-ReqFDDItemIE }}

DL-CodeInformationList-RL-Add-ReqFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-CodeInformationList-RL-Add-ReqFDD      CRITICALITY ignore      TYPE DL-CodeInformationList-RL-Add-ReqFDD PRESENCE mandatory },
    ...
}

DL-CodeInformationList-RL-Add-ReqFDD ::= SEQUENCE {
    scramblingCode          ScramblingCode,
    fdd-DL-ChannelisationCodeNumber FDD-DL-ChannelisationCodeNumber
}

-- ****
-- 
-- RADIO LINK ADDITION REQUEST TDD
-- 

RadioLinkAdditionRequestTDD ::= SEQUENCE {
    protocolIEs             ProtocolIE-Container     {{RadioLinkAdditionRequestTDD-IEs}},
    protocolExtensions       ProtocolExtensionContainer {{RadioLinkAdditionRequestTDD-Extensions}}           OPTIONAL,
    ...
}

RadioLinkAdditionRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID      CRITICALITY ignore      TYPE NodeB-CommunicationContextID      PRESENCE mandatory }|
    { ID id-UL-CCTrCHInformationList-RL-Add-ReqTDD  CRITICALITY ignore      TYPE UL-CCTrCHInformationList-RL-Add-ReqTDD  PRESENCE optional }|
    { ID id-DL-CCTrCHInformationList-RL-Add-ReqTDD  CRITICALITY ignore      TYPE DL-CCTrCHInformationList-RL-Add-ReqTDD  PRESENCE optional }|
    { ID id-RL-Information-RL-Add-ReqTDD        CRITICALITY ignore      TYPE RL-Information-RL-Add-ReqTDD        PRESENCE mandatory },
    ...
}

RadioLinkAdditionRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

UL-CCTrCHInformationList-RL-Add-ReqTDD ::= SEQUENCE (SIZE (1..maxnoofCCTrCH)) OF
  ProtocolIE-Container {{UL-CCTrCHInformation-RL-Add-ReqTDDItemIE} }

UL-CCTrCHInformation-RL-Add-ReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-UL-CCTrCHInformation-RL-Add-ReqTDDItem CRITICALITY ignore           TYPE UL-CCTrCHInformation-RL-Add-ReqTDDItem PRESENCE mandatory },
  ...
}

UL-CCTrCHInformation-RL-Add-ReqTDDItem ::= SEQUENCE {
  cCTrCH          CCTrCH,
  ul-DPCH-InformationList   UL-DPCH-InformationList-RL-Add-ReqTDD   OPTIONAL
}

UL-DPCH-InformationList-RL-Add-ReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
  ProtocolIE-Container {{UL-DPCH-InformationList-RL-Add-ReqTDDItemIE} }

UL-DPCH-InformationList-RL-Add-ReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id- UL-DPCH-InformationList-RL-Add-ReqTDDItem      CRITICALITY ignore
    PRESENCE     mandatory                           TYPE UL-DPCH-InformationList-RL-Add-ReqTDDItem },
  ...
}

UL-DPCH-InformationList-RL-Add-ReqTDDItem ::= SEQUENCE {
  dPCH-ID        DPCH-ID,
  tdd-ChannelisationCode TDD-ChannelisationCode,
  burstType       BurstType,
  midambleShift  MidambleShift,
  timeSlot        TimeSlot,
  tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
  repetitionPeriod RepetitionPeriod,
  repetitionLength RepetitionLength,
  tFCI-Presence   TFCI-Presence
}

DL-CCTrCHInformationList-RL-Add-ReqTDD ::= SEQUENCE (SIZE (1..maxnoofCCTrCHs)) OF
  ProtocolIE-Container {{ DL-CCTrCHInformationList-RL-Add-ReqTDDItemIE} }

DL-CCTrCHInformationList-RL-Add-ReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-CCTrCHInformationList-RL-Add-ReqTDDItem CRITICALITY ignore           TYPE DL-CCTrCHInformationList-RL-Add-ReqTDDItem PRESENCE
    mandatory },
  ...
}

DL-CCTrCHInformationList-RL-Add-ReqTDDItem ::= SEQUENCE {
  cCTrCH-ID      CCTrCH-ID,
  dl-DPCH-InformationList-RL-Add-ReqTDD   DL-DPCH-InformationList-RL-Add-ReqTDD   OPTIONAL
}

```

```

DL-DPCH-InformationList-RL-Add-ReqTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF
  ProtocolIE-Container {{ DL-DPCH-InformationList-RL-Add-ReqTDDItemIE }}

DL-DPCH-InformationList-RL-Add-ReqTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-DPCH-InformationList-RL-Add-ReqTDDItem CRITICALITY ignore TYPE DL-DPCH-InformationList-RL-Add-ReqTDDItem PRESENCE
    mandatory
  },
  ...
}

DL-DPCH-InformationList-RL-Add-ReqTDDItem ::= SEQUENCE {
  dPCH-ID DPCH-ID,
  tdd-ChannelisationCode TDD-ChannelisationCode,
  burstType BurstType,
  midambleShift MidambleShift,
  timeSlot TimeSlot,
  tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset,
  repetitionPeriod RepetitionPeriod,
  repetitionLength RepetitionLength,
  tFCI-Presence TFCI-Presence
}

RL-informationItem-RL-Add-ReqTDD ::= SEQUENCE {
  rL-ID RL-ID,
  c-ID C-ID,
  cFN CFN OPTIONAL,
  frameOffset FrameOffset,
  diversityControlField DiversityControlField,
  initial-DL-Transmission-Power DL-Power OPTIONAL,
  maximumDL-Power DL-Power OPTIONAL,
  minimumDL-Power DL-Power OPTIONAL
}

-- *****
-- 
-- RADIO LINK ADDITION RESPONSE FDD
-- 
-- *****

RadioLinkAdditionResponseFDD ::= SEQUENCE {
  protocolIEs ProtocolIE-Container {{RadioLinkAdditionResponseFDD-IEs}},
  protocolExtensions ProtocolExtensionContainer {{RadioLinkAdditionResponseFDD-Extensions}} OPTIONAL,
  ...
}

RadioLinkAdditionResponseFDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-CRNC-CommunicationContextID CRITICALITY ignore TYPE CRNC-CommunicationContextID PRESENCE mandatory }|
  { ID id-RL-ResponseInformationList-RL-Add-ResFDD CRITICALITY ignore TYPE RL-ResponseInformationList-RL-Add-ResFDD
    PRESENCE mandatory }|
  { ID id-CriticalityDiagnostic CRITICALITY ignore TYPE CriticalityDiagnostic PRESENCE optional
  },
}

```

```

}

RadioLinkAdditionResponseFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-ResponseInformationList-RL-Add-ResFDD ::= SEQUENCE (SIZE (1..maxnoofRL-1)) OF
    ProtocolIE-Container {{RL-ResponseInformationList-RL-Add-ResFDDItemIE} }

RL-ResponseInformation-RL-Add-ResFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RL-ResponseInformation-RL-Add-ResFDDItem           CRITICALITY ignore
        PRESENCE mandatory
    },
    ...
}

RL-ResponseInformation-RL-Add-ResFDDItem ::= SEQUENCE {
    rL-ID             RL-ID,
    ul-InterferenceLevel   UL-InterferenceLevel,
    diversityIndication   DiversityIndication-RL-Add-ResFDD,
    ssDT-SupportIndicator  SSDT-SupportIndicator
}

DiversityIndication-RL-Add-ResFDD ::= ENUMERATED {
    combining          Combining-RL-Add-ResFDD,
    non-combining      Non-Combining-RL-Add-ResFDD
}

Combining-RL-Add-ResFDD ::= SEQUENCE {
    rL-ID             RL-ID
}

Non-Combining-RL-Add-ResFDD ::= SEQUENCE {
    dCH-InformationResponseList-RL-Add-ResFDD
    DCH-InformationResponseList-RL-Add-ResFDD
}

DCH-InformationResponseList-RL-Add-ResFDD ::= SEQUENCE (SIZE (1..maxnoofRL-1)) OF
    ProtocolIE-Container{{DCH-InformationResponseList-RL-Add-ResFDD ItemIE} }

DCH-InformationResponseList-RL-Add-ResFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-InformationResponseList-RL-Add-ResFDDItem           CRITICALITY ignore
        ResFDDItem           PRESENCE mandatory
    },
    ...
}

DCH-InformationResponseList-RL-Add-ResFDDItem ::= SEQUENCE {
    dCH-ID             DCH-ID,

```

```

bindingID          BindingID,
transportLayerAddress   TransportLayerAddress
}

-- *****
-- 
-- RADIO LINK ADDITION RESPONSE TDD
-- *****

RadioLinkAdditionResponseTDD ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container      {{RadioLinkAdditionResponseTDD-IEs}},
    protocolExtensions     ProtocolExtensionContainer {{RadioLinkAdditionResponseTDD-Extensions}}                                OPTIONAL,
    ...
}

RadioLinkAdditionResponseTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-Communication-Context-ID   CRITICALITY ignore      TYPE   CRNC-Communication-Context-ID PRESENCE mandatory }|
    { ID id-RL-Information-RL-Add-RespTDD   CRITICALITY ignore      TYPE   RL-Information-RL-Add-RespTDD  PRESENCE   mandatory }|
{ ID id-CriticalityDiagnostic        CRITICALITY ignore      TYPE CriticalityDiagnostic      PRESENCE optional
},
...
}

RadioLinkAdditionResponseTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-Information-RL-Add-Resp ::= SEQUENCE {
    rL-ID            RL-ID,
    ul-InterferenceLevel   UL-InterferenceLevel,
    diversityIndication   DiversityIndication-RL-Add-RespTDD,
}
DiversityIndication-RL-Add-RespTDD ::= ENUMERATED {
    combining          Combining-RL-Add-RespTDD,
    non-Combining       Non-Combining-RL-Add-RespTDD
}

Combining-RL-Add-RespTDD ::= SEQUENCE {
    rL-ID            RL-ID
}

Non-Combining-RL-Add-RespTDD ::= SEQUENCE {
    dCH-InfomationResponseList DCH-InformationResponseList-RL-Add-RespTDD      OPTIONAL,
    dSCH-InfomationResponseList DSCH-InformationResponseList-RL-Add-RespTDD      OPTIONAL,
    uSCH-InfomationResponseList USCH-InformationResponseList-RL-Add-RespTDD      OPTIONAL
}

DCH-InformationResponseList-RL-Add-RespTDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF

```

```

ProtocolIE-Container {{DCH-InformationRespOpnse-RL-Add-RespTDDItemIE} }

DCH-InformationResponse-RL-Add-RespTDDItemIE NBAP-PROTOCOL-IES ::= {
  {ID id-DCH-InformationResponse-RL-Add-RespTDDItem   CRITICALITY ignore      TYPE      DCH-InformationResponse-RL-Add-RespTDDItem PRESENCE mandatory
},
  ...
}

DCH-InformationResponse-RL-Add-RespTDDItem ::= SEQUENCE {
  dCH-ID          DCH-ID,
  binding-ID     Binding-ID,
  transport-Layer-Address Transport-Laer-Address
}

DSCH-InformationResponseList-RL-Add-RespTDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
  ProtocolIE-Container {{DSCH-InformationRespOpnse-RL-Add-RespTDDItemIE} }

DSCH-InformationResponse-RL-Add-RespTDDItemIE NBAP-PROTOCOL-IES ::= {
  {ID id-DSCH-InformationResponse-RL-Add-RespTDDItem   CRITICALITY ignore      TYPE      DSCH-InformationResponse-RL-Add-RespTDDItem PRESENCE mandatory
},
  ...
}

DSCH-InformationResponse-RL-Add-RespTDDItem ::= SEQUENCE {
  dSCH-ID          DSCH-ID,
  binding-ID     Binding-ID,
  transport-Layer-Address Transport-Laer-Address
}

USCH-InformationResponseList-RL-Add-RespTDD ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
  ProtocolIE-Container {{USCH-InformationResponseList-RL-Add-RespTDD ItemIE} }

USCH-InformationResponseList-RL-Add-RespTDDItemIE NBAP-PROTOCOL-IES ::= {
  {ID id-USCH-InformationResponseList-RL-Add-RespTDDItem   CRITICALITY ignore      TYPE      USCH-InformationResponseList-RL-Add-RespTDDItem PRESENCE mandatory
},
  ...
}

USCH-InformationResponseList-RL-Add-RespTDDItem ::= SEQUENCE {
  uSCH-ID          USCH-ID,
  binding-ID     Binding-ID,
  transport-Layer-Address Transport-Laer-Address
}

-- ****
--
-- RADIO LINK ADDITION FAILURE FDD
--
-- ****

```

```

RadioLinkAdditionFailureFDD ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container     {{RadioLinkAdditionFailureFDD-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{RadioLinkAdditionFailureFDD-Extensions}}
} OPTIONAL,
...
}

RadioLinkAdditionFailureFDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID      CRITICALITY ignore   TYPE CRNC-CommunicationContextID      PRESENCE mandatory } |
    { ID id-Unsuccessful-RL-InformationResponseList-RL-Add-FailFDD      CRITICALITY ignore   TYPE Unsuccessful-RL-
InformationResponseList-RL-Add-FailFDD      PRESENCE     mandatory
} |
    { ID id-Successful-RL-InformationResponseList-RL-Add-FailFDD      CRITICALITY ignore   TYPE Successful-RL-
InformationResponseList-RL-Add-FailFDD      PRESENCE     mandatory
} |
    { ID id-CriticalityDiagnostic      CRITICALITY ignore   TYPE CriticalityDiagnostic      PRESENCE optional
},
...
}
}

RadioLinkAdditionFailureFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
...
}

Unsuccessful-RL-InformationResponseList-RL-Add-FailFDD ::= SEQUENCE      (SIZE (1..maxnoofRL-1)) OF
ProtocolIE-Container     {{Unsuccessful-RL-InformationResponseList-RL-Add-FailFDDItemIE }}

Unsuccessful-RL-InformationResponseList-RL-Add-FailFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-Unsuccessful-RL-InformationResponseList-RL-Add-FailFDDItem      CRITICALITY ignore
InformationResponseList-RL-Add-FailFDDItem      PRESENCE     mandatory
}, ,
...
}

Unsuccessful-RL-InformationResponseList-RL-Add-FailFDDItem ::= SEQUENCE {
    rL-ID          RL-ID,
    cause          Cause
}

Successful-RL-InformationResponseList-RL-Add-FailFDD ::= SEQUENCE (SIZE (1..maxnoofRL-2)) OF
ProtocolIE-Container {{Successful-RL-InformationResponse-RL-Add-FailFDD ItemIE }}

Successful-RL-InformationResponse-RL-Add-FailFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-Successful-RL-InformationResponse-RL-Add-FailFDDItem      CRITICALITY ignore
RL-Add-FailFDDItem      PRESENCE     mandatory
}, ,
...
}

Successful-RL-InformationResponse-RL-Add-FailFDDItem ::= SEQUENCE {
    rL-ID          RL-ID,
    ul-InterferenceLevel      UL-InterferenceLevel,
    diversityIndication      DiversityIndication-RL-Add-FailFDD,
}

```

```

sSDT-SupportIndicator      SSDT-SupportIndicator
}

DiversityIndication-RL-Add-FailFDD ::= ENUMERATED {
    combining          Combining-RL-Add-FailFDD,
    non-combining     Non-Combining-RL-Add-FailFDD
}

Combining-RL-Add-FailFDD ::= SEQUENCE {
    rL-ID           RL-ID
}

Non-Combining-RL-Add-FailFDD ::= SEQUENCE {
    dCH-InformationResponseList          DCH-InformationResponseList-RL-Add-FailFDD
}

DCH-InformationResponseList-RL-Add-FailFDD ::= SEQUENCE (SIZE (1..maxnoofDCH)) OF ProtocolIE-Container {{DCH-InformationResponse-RL-Add-FailFDDItemIE}}
}

DCH-InformationResponse-RL-Add-FailFDDItemIE NBAP-PROTOCOL-IES ::= {
    { I D id-DCH-InformationResponse-RL-Add-FailFDDItem   CRITICALITY ignore   TYPE DCH-InformationResponse-RL-Add-FailFDDItemPRESENCE mandatory
        },
    ...
}

DCH-InformationResponse-RL-Add-FailFDDItem ::= SEQUENCE {
    dCH-ID           DCH-ID,
    bindingID        BindingID,
    transportLayerAddress TransportLayerAddress
}

-- *****
-- 
-- RADIO LINK ADDITION FAILURE TDD
-- 
-- *****

RadioLinkAdditionFailureTDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RadioLinkAdditionFailureTDD-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkAdditionFailureTDD-Extensions}} OPTIONAL,
    ...
}

RadioLinkAdditionFailureTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-Unsuccessful-RL-InformationResponse CRITICALITY ignore   TYPE Unsuccessful-RL-InformationResponse PRESENCE mandatory } |
    { ID id-CriticalityDiagnostic   CRITICALITY ignore   TYPE CriticalityDiagnostic   PRESENCE optional
        },
    ...
}

RadioLinkAdditionFailureTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
}

```

```

}

Unsuccessful-RL-InformationResponse ::= SEQUENCE {
    rL-ID                  RL-ID,
    cause                  Cause
}

-- ****
-- 
-- RADIO LINK RECONFIGURATION PREPARE FDD
-- 
-- ****

RadioLinkReconfigurationPrepareFDD ::= SEQUENCE {
    protocolIEs            ProtocolIE-Container      {{RadioLinkReconfigurationPrepareFDD-IES}},
    protocolExtensions     ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareFDD-Extensions}}           OPTIONAL,
    ...
}

RadioLinkReconfigurationPrepareFDD-IES NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID      CRITICALITY ignore          TYPE NodeB-CommunicationContextID      PRESENCE mandatory   } |
    { ID id-UL-DPCH-Information-RL-ReconfPrepFDD  CRITICALITY ignore      TYPE UL-DPCH-Information-RL-ReconfPrepFDD  PRESENCE optional } |
    { ID id-DL-DPCH-Information-RL-ReconfPrepFDD  CRITICALITY ignore      TYPE DL-DPCH-Information-RL-ReconfPrepFDD  PRESENCE optional } |
    { ID id-DCH-ModifyList-RL-ReconfPrepFDD       CRITICALITY ignore      TYPE DCH-ModifyList-RL-ReconfPrepFDD       PRESENCE optional } |
    { ID id-DCH-AddList-RL-ReconfPrepFDD         CRITICALITY ignore      TYPE DCH-AddList-RL-ReconfPrepFDD         PRESENCE optional } |
    { ID id-DCH-DeleteList-RL-ReconfPrepFDD       CRITICALITY ignore      TYPE DCH-DeleteList-RL-ReconfPrepFDD       PRESENCE optional } |
    { ID id-DSCH-ModifyItem-RL-ReconfPrepFDD      CRITICALITY ignore      TYPE DSCH-ModifyItem-RL-ReconfPrepFDD      PRESENCE optional } |
    { ID id-DSCH-AddItem-RL-ReconfPrepFDD         CRITICALITY ignore      TYPE DSCH-AddItem-RL-ReconfPrepFDD         PRESENCE optional } |
    { ID id-DSCH-DeleteItem-RL-ReconfPrepFDD       CRITICALITY ignore      TYPE DSCH-DeleteItem-RL-ReconfPrepFDD       PRESENCE optional } |
    { ID id-RadioLinkInformationList-RL-ReconfPrepFDD  CRITICALITY ignore  TYPE RadioLinkInformationList-RL-ReconfPrepFDD  PRESENCE optional
},
    ...
}

RadioLinkReconfigurationPrepareFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-DPCH-Information-RL-ReconfPrepFDD ::= SEQUENCE {
    ul-ScramblingCode        UL-ScramblingCode      OPTIONAL,
    minUL-ChannelisationCodeLength MinUL-ChannelisationCodeLength OPTIONAL,
    maxNrOfUL-DPDCHs         MaxNrOfUL-DPDCHs      OPTIONAL
    -- This IE is present only if minUL-ChannelisationCodeLength equals to 4
    ul-PunctureLimit         UL-PunctureLimit      OPTIONAL,
    tFCs                      TFCS                  OPTIONAL,
    ul-DPCCH-SlotFormat      UL-DPCCH-SlotFormat  OPTIONAL,
    sSDT-CellIdentityLength   SSDT-CellIdentityLength OPTIONAL,
}

```

```

s-FieldLength      S-FieldLength      OPTIONAL,
-- The following information element is needed if there is a need to add Ies      with specific criticality.
}

DL-DPCH-Information-RL-ReconfPrepFDD ::= SEQUENCE {
    tFCS          TFCS      OPTIONAL,
    dl-DPCH-SlotFormat  DL-DPCH-SlotFormat  OPTIONAL,
    tFCI-SignallingMode TFCI-SignallingMode OPTIONAL,
    tFCI-Presence     TFCI-Presence     OPTIONAL,
    dTX-InsertionPoint DTX-InsertionPoint  OPTIONAL,
    ...
}

DCH-ModifyList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
    ProtocolIE-Container {{DCH-Modify-RL-ReconfPrepFDDItemIE} }

DCH-Modify-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-Modify-RL-ReconfPrepFDDItem CRITICALITY ignore      TYPE DCH-Modify-RL-ReconfPrepFDDItem  PRESENCE optional   },
    ...
}

DCH-Modify-RL-ReconfPrepFDDItem ::= SEQUENCE {
    dCH-ID        DCH-ID,
    ul-TransportFormatSet TransportFormatSet  OPTIONAL,
    dl-TransportFormatSet TransportFormatSet  OPTIONAL,
    frameHandlingPriority FrameHandlingPriority  OPTIONAL,
    ul-FP-Mode     UL-FP-Mode     OPTIONAL,
    toAWS         ToAWS       OPTIONAL,
    toAWE         ToAWE       OPTIONAL
}
}

DCH-AddList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
    ProtocolIE-Container {{DCH-Add-RL-ReconfPrepFDDItemIE} }

DCH-Add-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-Add-RL-ReconfPrepFDDItem  CRITICALITY ignore      TYPE DCH-Add-RL-ReconfPrepFDDItem  PRESENCE optional   },
    ...
}

DCH-Add-RL-ReconfPrepFDDItem ::= SEQUENCE {
    dCH-ID        DCH-ID,
    dCH-CombinationIndication DCH-CombinationIndication  OPTIONAL,
    rLC-Mode      RLC-Mode,
    ul-TransportFormatSet TransportFormatSet,
    dl-TransportFormatSet TransportFormatSet,
    frameHandlingPriority FrameHandlingPriority,
    payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
    ul-FP-Mode     UL-FP-Mode,
    toAWS         ToAWS,
    toAWE         ToAWE
}
}

```

```

DCH-DeleteList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
    ProtocolIE-Container {{DCH-Delete-RL-ReconfPrepFDDItemIE} }

DCH-Delete-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-Delete-RL-ReconfPrepFDDItem CRITICALITY ignore      TYPE DCH-Delete-RL-ReconfPrepFDDItem   PRESENCE optional      },
    ...
}

DCH-Delete-RL-ReconfPrepFDDItem ::= SEQUENCE {
    dCH-ID          DCH-ID
}

DSCH-ModifyItem-RL-ReconfPrepFDD ::= SEQUENCE {
    dl-TransportFormatSet      TransportFormatSet      OPTIONAL,
    rL-ID                      RL-ID                  OPTIONAL,
    frameHandlingPriority      FrameHandlingPriority  OPTIONAL,
    toAWS                      ToAWS                 OPTIONAL,
    toAWE                      ToAWE                 OPTIONAL
}

DSCH-AddItem-RL-ReconfPrepFDD ::= SEQUENCE {
    dl-TransportFormatSet      TransportFormatSet,
    rL-ID                      RL-ID,
    frameHandlingPriority      FrameHandlingPriority,
    toAWS                      ToAWS,
    toAWE                      ToAWE
}

DSCH-DeleteItem-RL-ReconfPrepFDD ::= SEQUENCE {
    rL-ID          RL-ID
}

RadioLinkInformationList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{RadioLinkInformation-RL-ReconfPrepFDDItemIE} }

RadioLinkInformation-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RadioLinkInformation-RL-ReconfPrepFDDItem   CRITICALITY ignore      TYPE RadioLinkInformation-RL-ReconfPrepFDDItemPRESENCE
        mandatory},
    ...
}

RadioLinkInformation-RL-ReconfPrepFDDItem ::= SEQUENCE {
    rL-ID          RL-ID,
    dl-CodeInformationList-RL-ReconfPrepFDD           DL-CodeInformationList-RL-ReconfPrepFDD      OPTIONAL,
    maxDL-Power    DL-Power               OPTIONAL,
    minDL-Power    DL-Power               OPTIONAL,
    sSDT-Indication SSDT-Indication     OPTIONAL,
    sSDT-CellIdentity SSDT-CellIdentity   OPTIONAL
-- The IE may be present if the SSDT Indication is set to SSDT Active in the UE
}

```

```

DL-CodeInformationList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofDLCodes)) OF
  ProtocolIE-Container {{DL-CodeInformation-RL-ReconfPrepFDDItemIE }}

DL-CodeInformation-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-CodeInformation-RL-ReconfPrepFDDItem CRITICALITY ignore TYPE DL-CodeInformation-RL-ReconfPrepFDDItem PRESENCE optional },
  ...
}

DL-CodeInformation-RL-ReconfPrepFDDItem ::= SEQUENCE {
  scramblingCode           ScramblingCode OPTIONAL,
  fdd-DL-ChannelisationCodeNumber   FDD-DL-ChannelisationCodeNumber OPTIONAL
}

-- *****
-- 
-- RADIO LINK RECONFIGURATION PREPARE TDD
-- 
-- *****

RadioLinkReconfigurationPrepareTDD ::= SEQUENCE {
  protocolIEs          ProtocolIE-Container {{RadioLinkReconfigurationPrepareTDD-IEs}},
  protocolExtensions  ProtocolExtensionContainer {{RadioLinkReconfigurationPrepareTDD-Extensions}} OPTIONAL,
  ...
}

RadioLinkReconfigurationPrepareTDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-NodeB-CommunicationContextID   CRITICALITY ignore      TYPE NodeB-CommunicationContextID PRESENCE mandatory } |
  { ID id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD   CRITICALITY ignore      TYPE UL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE optional } |
  { ID id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD   CRITICALITY ignore      TYPE DL-CCTrCH-InformationList-RL-ReconfPrepTDD PRESENCE optional } |
  { ID id-DCH-ModifyList-RL-ReconfPrepTDD   CRITICALITY ignore      TYPE DCH-ModifyList-RL-ReconfPrepTDD PRESENCE optional } |
  { ID id-DCH-AddList-RL-ReconfPrepTDD   CRITICALITY ignore      TYPE DCH-AddList-RL-ReconfPrepTDD PRESENCE optional } |
  { ID id-DCH-DeleteList-RL-ReconfPrepTDD   CRITICALITY ignore      TYPE DCH-DeleteList-RL-ReconfPrepTDD PRESENCE optional } |
  { ID id-DSCH-Information-ModifyList-RL-ReconfPrepTDD   CRITICALITY ignore      TYPE DSCH-Information-ModifyList-RL-ReconfPrepTDD PRESENCE optional } |
  { ID id-DSCH-information-AddList-RL-ReconfPrepTDD   CRITICALITY ignore      TYPE DSCH-Information-AddList-RL-ReconfPrepTDD PRESENCE optional } |
  { ID id-DSCH-Information-DeleteList-RL-ReconfPrepTDD   CRITICALITY ignore      TYPE DSCH-Information-DeleteList-RL-ReconfPrepTDD PRESENCE optional } |
  { ID id-USCH-Information-ModifyList-RL-ReconfPrepTDD   CRITICALITY ignore      TYPE USCH-Information-ModifyList-RL-ReconfPrepTDD PRESENCE optional } |
  { ID id-USCH-information-AddList-RL-ReconfPrepTDD   CRITICALITY ignore      TYPE USCH-Information-AddList-RL-ReconfPrepTDD PRESENCE optional }
}

```

```

} |
{ ID id-USCH-Information-DeleteList-RL-ReconfPrepTDD CRITICALITY ignore TYPE USCH-Information-DeleteList-RL-ReconfPrepTDD
PRESENCE optional
} |
{ ID id-RadioLinkInformation-RL-ReconfPrepTDD CRITICALITY ignore TYPE RadioLinkInformation-RL-ReconfPrepTDD PRESENCE
optional
},
...
}

RadioLinkReconfigurationPrepareTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
...
}

UL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofCCTrCHs)) OF ProtocolIE-Container {{UL-CCTrCH-Information-RL-ReconfPrepTDDItemIE }}

UL-CCTrCH-Information-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-UL-CCTrCH-Information-RL-ReconfPrepTDDItem CRITICALITY ignore TYPE UL-CCTrCH-Information-RL-ReconfPrepTDDItemPRESENCE
optional},
    ...
}

UL-CCTrCH-Information-RL-ReconfPrepTDDItem ::= SEQUENCE {
    cCTrCH-ID          CCTrCH-ID,
    tFCs                TFCS      OPTIONAL,
    tFCI-Coding         TFCI-Coding OPTIONAL,
    ul-DPCH-InformationList-RL-ReconfPrepTDD          puncturing-Limit      Puncturing-Limit OPTIONAL
    ul-DPCH-InformationList-RL-ReconfPrepTDD          UL-DPCH-InformationList-RL-ReconfPrepTDD OPTIONAL
}
}

UL-DPCH-InformationList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF ProtocolIE-Container {{UL-DPCH-Information-RL-ReconfPrepTDDItemIE }}

UL-DPCH-Information-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-UL-DPCH-Information-RL-ReconfPrepTDDItem CRITICALITY ignore TYPE UL-DPCH-Information-RL-ReconfPrepTDDItem PRESENCE
mandatory
},
    ...
}

UL-DPCH-Information-RL-ReconfPrepTDDItem ::= SEQUENCE {
    dPCH-ID            DPCHE-ID,
    tDD-ChannelisationCode   TDD-ChannelisationCode OPTIONAL,
    burstType           BurstType    OPTIONAL,
    midambleShift       MidambleShift OPTIONAL,
    timeSlot             TimeSlot     OPTIONAL,
    tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset OPTIONAL,
    repetitionPeriod    RepetitionPeriod OPTIONAL,
    repetitionLength    RepetitionLength OPTIONAL,
}

```

```

tFCI-Presence          TFCI-Presence      OPTIONAL
}

DL-CCTrCH-InformationList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofCCTrCHs)) OF ProtocolIE-Container {{DL-CCTrCH-Information-RL-ReconfPrepTDDItemIE }}

DL-CCTrCH-Information-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-CCTrCH-Information-RL-ReconfPrepTDDItem CRITICALITY ignore TYPE DL-CCTrCH-Information-RL-ReconfPrepTDDItem PRESENCE
    mandatory
},
  ...
}

DL-CCTrCH-Information-RL-ReconfPrepTDDItem ::= SEQUENCE {
  cCTrCH-ID           CCTrCH-ID,
  tFCS                TFCS      OPTIONAL,
  tFCI-Coding         TFCI-Coding OPTIONAL,       puncturing-Limit           Puncturing-Limit OPTIONAL
  dl-DPCH-InformationList-RL-ReconfPrepTDD             DL-DPCH-InformationList-RL-ReconfPrepTDD OPTIONAL
}
}

DL-DPCH-InformationList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofDPCHs)) OF ProtocolIE-Container {{DL-DPCH-Information-RL-ReconfPrepTDDItemIE }}

DL-DPCH-Information-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DL-DPCH-Information-RL-ReconfPrepTDDItem CRITICALITY ignore TYPE DL-DPCH-Information-RL-ReconfPrepTDDItem PRESENCE
    mandatory
},
  ...
}

DL-DPCH-Information-RL-ReconfPrepTDDItem ::= SEQUENCE {
  dPCH-ID            DPCH-ID,
  tDD-ChannelisationCode   TDD-ChannelisationCode OPTIONAL,
  burstType          BurstType    OPTIONAL,
  midambleShift      MidambleShift OPTIONAL,
  timeSlot           TimeSlot     OPTIONAL,
  tdd-PhysicalChannelOffset TDD-PhysicalChannelOffset OPTIONAL
  repetitionPeriod    RepetitionPeriod OPTIONAL,
  repetitionLength    RepetitionLength OPTIONAL,
  tFCI-Presence      TFCI-Presence OPTIONAL
}
}

DCH-ModifyList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF ProtocolIE-Container {{DCH-Modify-RL-ReconfPrepTDDItemIE }}

DCH-Modify-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Modify-RL-ReconfPrepTDDItem CRITICALITY ignore TYPE DCH-Modify-RL-ReconfPrepTDDItem PRESENCE optional },
  ...
}

DCH-Modify-RL-ReconfPrepTDDItem ::= SEQUENCE {

```

```

dCH-ID          DCH-ID,
ul-TransportFormatSet TransportFormatSet OPTIONAL,
dl-TransportFormatSet TransportFormatSet OPTIONAL,
frameHandlingPriority FrameHandlingPriority OPTIONAL,
ul-FP-Mode      UL-FP-Mode    OPTIONAL,
toAWS          ToAWS        OPTIONAL,
toAWE          ToAWE        OPTIONAL,
}

DCH-AddList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
ProtocolIE-Container {{DCH-Add-RL-ReconfPrepTDDItemIE }}

DCH-Add-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Add-RL-ReconfPrepTDDItem   CRITICALITY ignore      TYPE DCH-Add-RL-ReconfPrepTDDItem  PRESENCE optional },
  ...
}

DCH-Add-RL-ReconfPrepTDDItem ::= SEQUENCE {
  dCH-ID          DCH-ID,
  dCH-CombinationIndication DCH-CombinationIndication OPTIONAL,
  rLC-Mode        RLC-Mode,
  ul-CCTrCH-ID   CCTrCH-ID,
  dl-CCTrCH-ID   CCTrCH-ID,
  ul-TransportFormatSet TransportFormatSet,
  dl-TransportFormats TransportFormatSet,
  frameHandlingPriority FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode      UL-FP-Mode,
  toAWS          ToAWS,
  toAWE          ToAWE
}

DCH-DeleteList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
ProtocolIE-Container {{DCH-Delete-RL-ReconfPrepTDDItemIE }}

DCH-Delete-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Delete-RL-ReconfPrepTDDItem CRITICALITY ignore      TYPE DCH-Delete-RL-ReconfPrepTDDItem  PRESENCE optional },
  ...
}

DCH-Delete-RL-ReconfPrepTDDItem ::= SEQUENCE {
  dCH-ID          DCH-ID
}

DSCH-Information-ModifyList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
ProtocolIE-Container {{DSCH-Information-Modify-RL-ReconfPrepTDDItemIE }}

DSCH-Information-Modify-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DSCH-Information-Modify-RL-ReconfPrepTDDItem   CRITICALITY ignore      TYPE DSCH-Information-Modify-RL-ReconfPrepTDDItem  PRESENCE optional
},
}

```

```

}

DSCH-Information-Modify-RL-ReconfPrepTDDItem ::= SEQUENCE {
    dSCH-ID          DSCH-ID,
    transportFormatSet   TransportFormatSet OPTIONAL,
    cCTrCH-ID        CCTrCH-ID OPTIONAL,
    frameHandlingPriority FrameHandlingPriority OPTIONAL,
    toAWE            ToAWE OPTIONAL,
    toAWS            ToAWS OPTIONAL
}

DSCH-Information-AddList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
    ProtocolIE-Container {{DSCH-Information-Add-RL-ReconfPrepTDDItemIE }}

DSCH-Information-Add-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DSCH-Information-Add-RL-ReconfPrepTDDItem CRITICALITY ignore TYPE DCH-Add-RL-ReconfPrepTDDItem PRESENCE mandatory
},
    ...
}

DSCH-Information-Add-RL-ReconfPrepTDDItem ::= SEQUENCE {
    dSCH-ID          DSCH-ID,
    cCTrCH-ID        CCTrCH-ID,
    transportFormatSet   TransportFormatSet,
    frameHandlingPriority FrameHandlingPriority OPTIONAL,
    toAWE            ToAWE,
    toAWS            ToAWS
}

DSCH-Information-DeleteList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
    ProtocolIE-Container {{DCH-Delete-RL-ReconfPrepTDDItemIE }}

DSCH-Information-Delete-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DSCH-Information-Delete-RL-ReconfPrepTDDItem CRITICALITY ignore TYPE DSCH-Information-Delete-RL-ReconfPrepTDDItem PRESENCE
optional
},
    ...
}

DSCH-Information-Delete-RL-ReconfPrepTDDItem ::= SEQUENCE {
    dSCH-ID          DSCH-ID
}

USCH-Information-ModifyList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
    ProtocolIE-Container {{USCH-Information-Modify-RL-ReconfPrepTDDItemIE }}

USCH-Information-Modify-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-USCH-Information-Modify-RL-ReconfPrepTDDItem CRITICALITY ignore TYPE USCH-Information-Modify-RL-ReconfPrepTDDItem PRESENCE
optional
},
    ...
}

```

```

USCH-Information-Modify-RL-ReconfPrepTDDItem ::= SEQUENCE {
    dSCH-ID          DSCH-ID,
    transportFormatSet   TransportFormatSet OPTIONAL,
    cCTrCH-ID        CCTrCH-ID      OPTIONAL
}

USCH-Information-AddList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
    ProtocolIE-Container {{USCH-Information-Add-RL-ReconfPrepTDDItemIE} }

USCH-Information-Add-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-USCH-Information-Add-RL-ReconfPrepTDDItem CRITICALITY ignore TYPE USCH-Add-RL-ReconfPrepTDDItem PRESENCE optional
},
    ...
}

USCH-Information-Add-RL-ReconfPrepTDDItem ::= SEQUENCE {
    uSCH-ID          USCH-ID,
    cCTrCH-ID        CCTrCH-ID,
    transportFormatSet   TransportFormatSet
}

USCH-Information-DeleteList-RL-ReconfPrepTDD ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
    ProtocolIE-Container {{USCH-Delete-RL-ReconfPrepTDDItemIE} }

USCH-Information-Delete-RL-ReconfPrepTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-USCH-Information-Delete-RL-ReconfPrepTDDItem CRITICALITY ignore TYPE USCH-Information-Delete-RL-ReconfPrepTDDItem PRESENCE optional
},
    ...
}

USCH-Information-Delete-RL-ReconfPrepTDDItem ::= SEQUENCE {
    uSCH-ID          USCH-ID
}

RadioLinkInformation-RL-ReconfPrepTDD ::= SEQUENCE {
    maxDL-Power      DL-Power      OPTIONAL,
    minDL-Power      DL-Power      OPTIONAL
}

-- ****
-- 
-- RADIO LINK RECONFIGURATION READY
-- 
-- ****

RadioLinkReconfigurationReady ::= SEQUENCE {
    protocolIEs        ProtocolIE-Container {{RadioLinkReconfigurationReady-IEs}},
    protocolExtensions ProtocolExtensionContainer {{RadioLinkReconfigurationReady-Extensions}} OPTIONAL,
    ...
}

```

```

RadioLinkReconfigurationReady-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-CRNC-CommunicationContextID      CRITICALITY ignore      TYPE CRNC-CommunicationContextID      PRESENCE mandatory } |
  { ID id-RL-InformationResponseList-RL-ReconfReady   CRITICALITY    ignore      TYPE     RL-InformationResponseList-RL-ReconfReadyPRESENCE
optional
},
  ...
}

RadioLinkReconfigurationReady-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

RL-InformationResponseList-RL-ReconfReady ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
ProtocolIE-Container {{RL-InformationResponse-RL-ReconfReadyItemIE} }

RL-InformationResponse-RL-ReconfReadyItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-RL-InformationResponseList-RL-ReconfReadyItem      CRITICALITY ignore
ReconfReadyItem      PRESENCE      mandatory
},
  ...
}

RL-InformationResponseList-RL-ReconfReadyItem ::= SEQUENCE {
  rL-ID          RL-ID,
  dCHsToBeAdded  DCH-AddList-RL-ReconfReady  OPTIONAL,
  dCHsToBeModified DCH-ModifyList-RL-ReconfReady  OPTIONAL,
  dSCH-SetupItem  DSCH-SetupItem-RL-ReconfReady  OPTIONAL,
  dSCH-ModifyItem DSCH-ModifyItem-RL-ReconfReady  OPTIONAL
  uCH-SetupItem  USCH-SetupItem-RL-ReconfReady  OPTIONAL,
  uSCH-ModifyItem USCH-ModifyItem-RL-ReconfReady  OPTIONAL
}
DCH-AddList-RL-ReconfReady ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
ProtocolIE-Container {{DCH-Add-RL-ReconfReadyItemIE} }

DCH-Add-RL-ReconfReadyItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Add-RL-ReconfReadyItem      CRITICALITY ignore      TYPE DCH-Add-RL-ReconfReadyItem      PRESENCE mandatory },
  ...
}

DCH-Add-RL-ReconfReadyItem ::= SEQUENCE {
  dCH-ID          DCH-ID,
  bindingID       BindingID,
  transportLayerAddress TransportLayerAddress
}

DCH-ModifyList-RL-ReconfReady ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
ProtocolIE-Container {{DCH-Modify-RL-ReconfReadyItemIE} }

```

```

DCH-Modify-RL-ReconfReadyItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Modify-RL-ReconfReadyItem      CRITICALITY ignore   TYPE DCH-Modify-RL-ReconfReadyItem      PRESENCE mandatory  },
  ...
}

DCH-Modify-RL-ReconfReadyItem ::= SEQUENCE {
  dCH-ID           DCH-ID,
  bindingID       BindingID,
  transportLayerAddress TransportLayerAddress
}

DSCH-SetupList-RL-ReconfReady ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
  ProtocolIE-Container {{DSCH-Setup-RL-ReconfReadyItemIE} }

DSCH-Setup-RL-ReconfReadyItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DSCH-Setup-RL-ReconfReadyItem      CRITICALITY ignore   TYPE DSCH-Setup-RL-ReconfReadyItem      PRESENCE mandatory  },
  ...
}

DSCH-Setup-RL-ReconfReadyItem ::= SEQUENCE {
  dSCH-ID          DSCH-ID
  bindingID        BindingID,
  transportLayerAddress TransportLayerAddress
}

DSCH-ModifyList-RL-ReconfReady ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
  ProtocolIE-Container {{DSCH-Modify-RL-ReconfReadyItemIE} }

DSCH-Modify-RL-ReconfReadyItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DSCH-Modify-RL-ReconfReadyItem      CRITICALITY ignore   TYPE DSCH-Modify-RL-ReconfReadyItem      PRESENCE mandatory  },
  ...
}

DSCH-ModifyItem-RL-ReconfReadyItem ::= SEQUENCE {
  dSCH-ID          DSCH-ID
  bindingID        BindingID,
  transportLayerAddress TransportLayerAddress
}

USCH-SetupList-RL-ReconfReady ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
  ProtocolIE-Container {{USCH-Setup-RL-ReconfReadyItemIE} }

USCH-Setup-RL-ReconfReadyItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-USCH-Setup-RL-ReconfReadyItem      CRITICALITY ignore   TYPE USCH-Setup-RL-ReconfReadyItem      PRESENCE mandatory  },
  ...
}

USCH-Setup-RL-ReconfReadyItem ::= SEQUENCE {
  uSCH-ID          USCH-ID
  bindingID        BindingID,
}

```

```

    transportLayerAddress          TransportLayerAddress
}

USCH-ModifyList-RL-ReconfReady ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
    ProtocolIE-Container {{USCH-Modify-RL-ReconfReadyItemIE} }

USCH-Modify-RL-ReconfReadyItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-USCH-Modify-RL-ReconfReadyItem      CRITICALITY ignore   TYPE USCH-Modify-RL-ReconfReadyItem   PRESENCE mandatory   },
    ...
}

USCH-ModifyItem-RL-ReconfReadyItem ::= SEQUENCE {
    uSCH-ID                  USCH-ID
    bindingID                BindingID,
    transportLayerAddress     TransportLayerAddress
}

-- ****
-- 
-- RADIO LINK RECONFIGURATION FAILURE
-- 
-- ****

RadioLinkReconfigurationFailure ::= SEQUENCE {
    protocolIEs               ProtocolIE-Container {{RadioLinkReconfigurationFailure-IEs}},
    protocolExtensions        ProtocolExtensionContainer {{RadioLinkReconfigurationFailure-Extensions}}           OPTIONAL,
    ...
}

RadioLinkReconfigurationFailure-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID      CRITICALITY ignore   TYPE CRNC-CommunicationContextID      PRESENCE mandatory   } |
    { ID id-Cause                          CRITICALITY ignore   TYPE Cause                         PRESENCE mandatory } |
    { ID id-RL-ReconfigurationFailureList-RL-ReconfFail CRITICALITY ignore   TYPE RL-ReconfigurationFailureList-RL-ReconfFail PRESENCE optional
    }|
    { ID id-CriticalityDiagnostic          CRITICALITY ignore   TYPE CriticalityDiagnostic          PRESENCE optional
    },
    ...
}

RadioLinkReconfigurationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-ReconfigurationFailureList-RL-ReconfFail ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{RL-ReconfigurationFailure-RL-ReconfFailItemIE} }

RL-ReconfigurationFailure-RL-ReconfFailItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RL-ReconfigurationFailure-RL-ReconfFailItem CRITICALITY ignore   TYPE RL-ReconfigurationFailure-RL-ReconfFailItem PRESENCE optional
    },
    ...
}

```

```

}

RL-ReconfigurationFailure-RL-ReconfFailItem ::= SEQUENCE {
    rL-ID                  RL-ID,
    cause                  Cause
}

-- *****
-- 
-- RADIO LINK RECONFIGURATION COMMIT
-- 
-- *****

RadioLinkReconfigurationCommit ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container {{RadioLinkReconfigurationCommit-IEs}},
    protocolExtensions     ProtocolExtensionContainer {{RadioLinkReconfigurationCommit-Extensions}} OPTIONAL,
    ...
}

RadioLinkReconfigurationCommit-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID      CRITICALITY ignore      TYPE NodeB-CommunicationContextID      PRESENCE mandatory } |
    { ID id-CFN                      CRITICALITY ignore      TYPE CFN                         PRESENCE mandatory },
    ...
}

RadioLinkReconfigurationCommit-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- RADIO LINK RECONFIGURATION CANCEL
-- 
-- *****

RadioLinkReconfigurationCancel ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container {{RadioLinkReconfigurationCancel-IEs}},
    protocolExtensions     ProtocolExtensionContainer {{RadioLinkReconfigurationCancel-Extensions}} OPTIONAL,
    ...
}

RadioLinkReconfigurationCancel-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID      CRITICALITY ignore      TYPE NodeB-CommunicationContextID      PRESENCE mandatory },
    ...
}

RadioLinkReconfigurationCancel-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- ****
-- 
-- RADIO LINK RECONFIGURATION REQUEST FDD
-- 
-- ****

RadioLinkReconfigurationRequestFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RadioLinkReconfigurationRequestFDD-IES}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkReconfigurationRequestFDD-Extensions}}                                OPTIONAL,
    ...
}

RadioLinkReconfigurationRequestFDD-IES NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID      CRITICALITY ignore      TYPE NodeB-CommunicationContextID      PRESENCE mandatory } |
    { ID id-UL-DPCH-InformationItem-RL-ReconfReqFDD CRITICALITY ignore      TYPE UL-DPCH-InformationItem-RL-ReconfReqFDD      PRESENCE optional } |
    { ID id-DL-DPCH-InformationItem-RL-ReconfReqFDD CRITICALITY ignore      TYPE DL-DPCH-InformationItem-RL-ReconfReqFDD      PRESENCE optional } |
    { ID id-DCH-ModifyList-RL-ReconfReqFDD      CRITICALITY ignore      TYPE DCH-ModifyList-RL-ReconfReqFDD      PRESENCE optional } |
    { ID id-DCH-AddList-RL-ReconfReqFDD      CRITICALITY ignore      TYPE DCH-AddList-RL-ReconfReqFDD      PRESENCE optional } |
    { ID id-DCH-DeleteList-RL-ReconfReqFDD      CRITICALITY ignore      TYPE DCH-DeleteList-RL-ReconfReqFDD      PRESENCE optional } |
    { ID id-DSCH-ModifyItem-RL-ReconfReqFDD      CRITICALITY ignore      TYPE DSCH-ModifyItem-RL-ReconfReqFDD      PRESENCE optional } |
    { ID id-DSCH-AddItem-RL-ReconfReqFDD      CRITICALITY ignore      TYPE DSCH-AddItem-RL-ReconfReqFDD      PRESENCE optional } |
    { ID id-DSCH-DeleteItem-RL-ReconfReqFDD      CRITICALITY ignore      TYPE DSCH-DeleteItem-RL-ReconfReqFDD      PRESENCE optional } |
    { ID id-RL-InformationList-RL-ReconfReqFDD      CRITICALITY ignore      TYPE RL-InformationList-RL-ReconfReqFDD      PRESENCE optional },
    ...
}

RadioLinkReconfigurationRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

UL-DPCH-InformationItem-RL-ReconfReqFDD ::= SEQUENCE {
    tFCs           TFCS      OPTIONAL
}

DL-DPCH-InformationItem-RL-ReconfReqFDD ::= SEQUENCE {
    tFCs           TFCS      OPTIONAL
    tFCI-SignallingMode   TFCI-SignallingMode OPTIONAL
}

DCH-ModifyList-RL-ReconfReqFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
    ProtocolIE-Container {{DCH-Modify-RL-ReconfReqFDDItemIE} }

DCH-Modify-RL-ReconfReqFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DCH-Modify-RL-ReconfReqFDDItem  CRITICALITY ignore      TYPE DCH-Modify-RL-ReconfReqFDDItem PRESENCE optional } ,
    ...
}

DCH-Modify-RL-ReconfReqFDDItem ::= SEQUENCE {

```

```

dCH-ID          DCH-ID,
ul-TransportFormatSet TransportFormatSet OPTIONAL,
dl-TransportFormatSet TransportFormatSet OPTIONAL,
frameHandlingPriority FrameHandlingPriority OPTIONAL,
ul-FP-Mode       UL-FP-Mode    OPTIONAL,
toAWS           ToAWS        OPTIONAL,
toAWE           ToAWE        OPTIONAL
}

DCH-AddList-RL-ReconfReqFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
ProtocolIE-Container {{DCH-Add-RL-ReconfReqFDDItemIE} }

DCH-Add-RL-ReconfReqFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Add-RL-ReconfReqFDDItem CRITICALITY ignore      TYPE DCH-Add-RL-ReconfReqFDDItem PRESENCE optional   },
  ...
}

DCH-Add-RL-ReconfReqFDDItem ::= SEQUENCE {
  dCH-ID          DCH-ID,
  ul-TransportFormatSet TransportFormatSet,
  dl-TransportFormatSet TransportFormatSet,
  frameHandlingPriority FrameHandlingPriority,
  payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
  ul-FP-Mode       UL-FP-Mode,
  toAWS           ToAWS,
  toAWE           ToAWE
}
}

DCH-DeleteList-RL-ReconfReqFDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
ProtocolIE-Container {{DCH-Delete-RL-ReconfReqFDDItemIE} }

DCH-Delete-RL-ReconfReqFDDItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Delete-RL-ReconfReqFDDItem CRITICALITY ignore      TYPE DCH-Delete-RL-ReconfReqFDDItem PRESENCE optional   },
  ...
}

DCH-Delete-RL-ReconfReqFDDItem ::= SEQUENCE {
  dCH-ID          DCH-ID
}

DSCH-ModifyItem-RL-ReconfReqFDD ::= SEQUENCE {
  dl-TransportFormatSet TransportFormatSet OPTIONAL,
  rL-ID             RL-ID        OPTIONAL,
  frameHandlingPriority FrameHandlingPriority OPTIONAL,
  toAWS           ToAWS        OPTIONAL,
  toAWE           ToAWE        OPTIONAL
}

DSCH-AddItem-RL-ReconfReqFDD ::= SEQUENCE {
  dl-TransportFormatSet TransportFormatSet,
  rL-ID             RL-ID,

```

```

frameHandlingPriority      FrameHandlingPriority,
toAWS                     ToAWS,
toAWE                     ToAWE
}

DSCH-DeleteItem-RL-ReconfReqFDD ::= SEQUENCE {
    rL-ID          RL-ID
}

RL-InformationList-RL-ReconfPrepFDD ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{RL-Information-RL-ReconfPrepFDDItemIE} }

RL-Information-RL-ReconfPrepFDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-RL-ReconfPrepFDDItem CRITICALITY ignore   TYPE RL-Information-RL-ReconfPrepFDDItem PRESENCE optional },
    ...
}

RL-Information-RL-ReconfPrepFDDItem ::= SEQUENCE {
    rL-ID          RL-ID,
    maxDL-Power    DL-Power      OPTIONAL,
    minDL-Power    DL-Power      OPTIONAL
}

-- *****
-- 
-- RADIO LINK RECONFIGURATION REQUEST TDD
-- 
-- *****

RadioLinkReconfigurationRequestTDD ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container {{RadioLinkReconfigurationRequestTDD-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{RadioLinkReconfigurationRequestTDD-Extensions}}
    OPTIONAL,
    ...
}

RadioLinkReconfigurationRequestTDD-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID      CRITICALITY ignore   TYPE NodeB-CommunicationContextID      PRESENCE mandatory } |
    { ID id-UL-CCTrCH-InformationList-RL-ReconfReqTDD  CRITICALITY ignore   TYPE UL-CCTrCH-InformationList-RL-ReconfReqTDD
    PRESENCE optional
    } |
    { ID id-DL-CCTrCH-InformationList-RL-ReconfReqTDD  CRITICALITY ignore   TYPE DL-CCTrCH-InformationList-RL-ReconfReqTDD
    PRESENCE optional
    } |
    { ID id-DCH-ModifyList-RL-ReconfReqTDD  CRITICALITY ignore   TYPE DCH-ModifyList-RL-ReconfReqTDD  PRESENCE optional } |
    { ID id-DCH-AddList-RL-ReconfReqTDD  CRITICALITY ignore   TYPE DCH-AddList-RL-ReconfReqTDD  PRESENCE optional } |
    { ID id-DCH-DeleteList-RL-ReconfReqTDD  CRITICALITY ignore   TYPE DCH-DeleteList-RL-ReconfReqTDD  PRESENCE optional } |
    { ID id-DSCH-ModifyList-RL-ReconfReqTDD  CRITICALITY ignore   TYPE DSCH-ModifyList-RL-ReconfReqTDD  PRESENCE optional } |
    { ID id-DSCH-AddList-RL-ReconfReqTDD  CRITICALITY ignore   TYPE DSCH-AddList-RL-ReconfReqTDD  PRESENCE optional } |
    { ID id-DSCH-DeleteList-RL-ReconfReqTDD  CRITICALITY ignore   TYPE DSCH-DeleteList-RL-ReconfReqTDD  PRESENCE optional } |
    { ID id-USCH-ModifyList-RL-ReconfReqTDD  CRITICALITY ignore   TYPE USCH-ModifyList-RL-ReconfReqTDD  PRESENCE optional } |
    { ID id-USCH-AddList-RL-ReconfReqTDD  CRITICALITY ignore   TYPE USCH-AddList-RL-ReconfReqTDD  PRESENCE optional } |
}

```

```

{ ID id-USCH-DeleteList-RL-ReconfReqTDD      CRITICALITY ignore  TYPE USCH-DeleteList-RL-ReconfReqTDD      PRESENCE optional },
...
}

RadioLinkReconfigurationRequestTDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
...
}

UL-CCTrCH-InformationList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofCCTrCHs)) OF
ProtocolIE-Container {{UL-CCTrCH-Information-RL-ReconfReqTDDItemIE }}

UL-CCTrCH-Information-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
{ ID id-UL-CCTrCH-Information-RL-ReconfReqTDDItem   CRITICALITY ignore      TYPE      UL-CCTrCH-Information-RL-ReconfReqTDDItem
PRESENCE    mandatory
},
...
}

UL-CCTrCH-Information-RL-ReconfReqTDDItem ::= SEQUENCE {
  cCTrCH-ID          CCTrCH-ID,
  tFCS                TFCS,
  puncturingLimit     PuncturingLimit
}

DL-CCTrCH-InformationList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofCCTrCHs)) OF
ProtocolIE-Container {{DL-CCTrCH-Information-RL-ReconfReqTDDItemIE }}

DL-CCTrCH-Information-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
{ ID id-DL-CCTrCH-Information-RL-ReconfReqTDDItem   CRITICALITY ignore      TYPE      DL-CCTrCH-Information-RL-ReconfReqTDDItem
PRESENCE    mandatory
},
...
}

DL-CCTrCH-Information-RL-ReconfReqTDDItem ::= SEQUENCE {
  cCTrCH-ID          CCTrCH-ID,
  tFCS                TFCS,
  puncturingLimit     PuncturingLimit
}

DCH-ModifyList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
ProtocolIE-Container {{DCH-Modify-RL-ReconfReqTDDItemIE }}

DCH-Modify-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
{ ID id-DCH-Modify-RL-ReconfReqTDDItem   CRITICALITY ignore      TYPE DCH-Modify-RL-ReconfReqTDDItem PRESENCE optional },
...
}

DCH-Modify-RL-ReconfReqTDDItem ::= SEQUENCE {

```

```

dCH-ID           DCH-ID,
ul-CCTrCH-ID    CCTrCH-ID,
dl-CCTrCH-ID    CCTrCH-ID,
ul-TransportFormatSet TransportFormatSet OPTIONAL,
dl-TransportFormatSet TransportFormatSet OPTIONAL,
frameHandlingPriority FrameHandlingPriority OPTIONAL,
ul-FP-Mode       UL-FP-Mode   OPTIONAL,
toAWS           ToAWS      OPTIONAL,
toAWE           ToAWE      OPTIONAL
}

DCH-AddList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
ProtocolIE-Container {{DCH-Add-RL-ReconfReqTDDItemIE }}

DCH-Add-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
{ ID id-DCH-Add-RL-ReconfReqTDDItem CRITICALITY ignore      TYPE DCH-Add-RL-ReconfReqTDDItem PRESENCE optional },
...
}

DCH-Add-RL-ReconfReqTDDItem ::= SEQUENCE {
dCH-ID           DCH-ID,
rLC-Mode         RLC-Mode,
ul-CCTrCH-ID    CCTrCH-ID,
dl-CCTrCH-ID    CCTrCH-ID,
ul-TransportFormatSet TransportFormatSet,
dl-TransportFormatSet TransportFormatSet,
frameHandlingPriority FrameHandlingPriority,
payloadCRC-PresenceIndicator PayloadCRC-PresenceIndicator,
ul-FP-Mode       UL-FP-Mode,
toAWS           ToAWS,
toAWE           ToAWE
}
}

DCH-DeleteList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
ProtocolIE-Container {{DCH-Delete-RL-ReconfReqTDDItemIE }}

DCH-Delete-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
{ ID id-DCH-Delete-RL-ReconfReqTDDItem CRITICALITY ignore      TYPE DCH-Delete-RL-ReconfReqTDDItem PRESENCE optional },
...
}

DCH-Delete-RL-ReconfReqTDDItem ::= SEQUENCE {
dCH-ID           DCH-ID
}

DSCH-ModifyList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
ProtocolIE-Container {{DSCH-Modify-RL-ReconfReqTDDItemIE }}

DSCH-Modify-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
{ ID id-DSCH-Modify-RL-ReconfReqTDDItem CRITICALITY ignore      TYPE DSCH-Modify-RL-ReconfReqTDDItem PRESENCE optional },
...
}

```

```

}

DSCH-Modify-RL-ReconfReqTDDItem ::= SEQUENCE {
    dSCH-ID          DSCH-ID,
    cCTrCH-ID        CCTrCH-ID,
    transportFormatSet   TransportFormatSet OPTIONAL,
    frameHandlingPriority   FrameHandlingPriority OPTIONAL,
    toAWE            ToAWE      OPTIONAL,
    toAWS            ToAWS      OPTIONAL
}

DSCH-AddList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
    ProtocolIE-Container {{DSCH-Add-RL-ReconfReqTDDItemIE} }

DSCH-Add-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DSCH-Add-RL-ReconfReqTDDItem   CRITICALITY ignore      TYPE DSCH-Add-RL-ReconfReqTDDItem  PRESENCE optional },
    ...
}

DSCH-Add-RL-ReconfReqTDDItem ::= SEQUENCE {
    dSCH-ID          DSCH-ID,
    cCTrCH-ID        CCTrCH-ID,
    transportFormatSet   TransportFormatSet,
    frameHandlingPriority   FrameHandlingPriority OPTIONAL,
    toAWE            ToAWE,
    toAWS            ToAWS
}

DSCH-DeleteList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
    ProtocolIE-Container {{DSCH-Delete-RL-ReconfReqTDDItemIE} }

DSCH-Delete-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DSCH-Delete-RL-ReconfReqTDDItem CRITICALITY ignore      TYPE DSCH-Delete-RL-ReconfReqTDDItem  PRESENCE optional },
    ...
}

DSCH-Delete-RL-ReconfReqTDDItem ::= SEQUENCE {
    dSCH-ID          DSCH-ID
}

USCH-ModifyList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
    ProtocolIE-Container {{USCH-Modify-RL-ReconfReqTDDItemIE} }

USCH-Modify-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-USCH-Modify-RL-ReconfReqTDDItem   CRITICALITY ignore      TYPE USCH-Modify-RL-ReconfReqTDDItem  PRESENCE optional },
    ...
}

USCH-Modify-RL-ReconfReqTDDItem ::= SEQUENCE {
    uSCH-ID          USCH-ID,
    cCTrCH-ID        CCTrCH-ID      OPTIONAL,
}

```

```

    transportFormatSet      TransportFormatSet  OPTIONAL,
}

USCH-AddList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
    ProtocolIE-Container {{USCH-Add-RL-ReconfReqTDDItemIE }}

USCH-Add-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-USCH-Add-RL-ReconfReqTDDItem   CRITICALITY ignore      TYPE USCH-Add-RL-ReconfReqTDDItem  PRESENCE optional },
    ...
}

USCH-Add-RL-ReconfReqTDDItem ::= SEQUENCE {
    uSCH-ID          USCH-ID,
    cCTrCH-ID        CCTrCH-ID,
    transportFormatSet TransportFormatSet,
}
}

USCH-DeleteList-RL-ReconfReqTDD ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
    ProtocolIE-Container {{USCH-Delete-RL-ReconfReqTDDItemIE }}

USCH-Delete-RL-ReconfReqTDDItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-USCH-Delete-RL-ReconfReqTDDItem CRITICALITY ignore      TYPE USCH-Delete-RL-ReconfReqTDDItem  PRESENCE mandatory },
    ...
}

USCH-Delete-RL-ReconfReqTDDItem ::= SEQUENCE {
    uSCH-ID          USCH-ID
}

-- *****
-- 
-- RADIO LINK RECONFIGURATION RESPONSE
-- 
-- *****

RadioLinkReconfigurationResponse ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container {{RadioLinkReconfigurationResponse-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{RadioLinkReconfigurationResponse-Extensions}}
    OPTIONAL,
    ...
}

RadioLinkReconfigurationResponse-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID   CRITICALITY ignore      TYPE CRNC-CommunicationContextID  PRESENCE mandatory } |
    { ID id-RL-InformationResponseList-RL-ReconfResp   CRITICALITY ignore      TYPE RL-InformationResponseList-RL-ReconfResp  PRESENCE optional
} |
{ ID id-CriticalityDiagnostic          CRITICALITY ignore      TYPE CriticalityDiagnostic        PRESENCE optional
},
...
}

RL-InformationResponseList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF

```

```

ProtocolIE-Container { {RL-InformationResponseItem-RL-ReconfRespIE} }

RL-InformationResponseItem-RL-ReconfRespIE NBAP-PROTOCOL-IE ::= {
  { ID id-RL-InformationResponseItem-RL-ReconfResp      CRITICALITY ignore   TYPE RL-InformationResponseItem-RL-ReconfResp      PRESENCE mandatory
},
  ...
}

RL-InformationResponseItem-RL-ReconfResp ::= SEQUENCE {
  rL-ID          RL-ID,
  dCHsToBeAdded  DCH-AddList-RL-ReconfResp  OPTIONAL,
  dCHsToBeModified DCH-ModifyList-RL-ReconfResp  OPTIONAL,
  dSCHsToBeSetup  DSCH-SetupList-RL-ReconfResp  OPTIONAL,
  dSCHsToBeModifie DSCH-ModifyList-RL-ReconfResp  OPTIONAL,
  uSCHsToBeSetup  USCH-SetupList-RL-ReconfResp  OPTIONAL,
  uSCHsToBeModifie USCH-ModifyList-RL-ReconfResp  OPTIONAL
}
  ...

DCH-ModifyList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
  ProtocolIE-Container {{DCH-Modify-RL-ReconfRespItemIE} }

DCH-Modify-RL-ReconfRespItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Modify-RL-ReconfRespItem    CRITICALITY ignore      TYPE DCH-Modify-RL-ReconfRespItem  PRESENCE optional },
  ...
}

DCH-Modify-RL-ReconfRespItem ::= SEQUENCE {
  dCH-ID        DCH-ID,
  bindingID     BindingID,
  transportLayerAddress TransportLayerAddress
}

DCH-AddList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofDCHs)) OF
  ProtocolIE-Container {{DCH-Add-RL-ReconfRespItemIE} }

DCH-Add-RL-ReconfRespItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DCH-Add-RL-ReconfRespItem    CRITICALITY ignore      TYPE DCH-Add-RL-ReconfRespItem  PRESENCE optional   },
  ...
}

DCH-Add-RL-ReconfRespItem ::= SEQUENCE {
  dCH-ID        DCH-ID,
  bindingID     BindingID,
  transportLayerAddress TransportLayerAddress
}

DSCH-SetupList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
  ProtocolIE-Container {{DSCH-Setup-RL-ReconfRespItemIE} }

DSCH-Setup-RL-ReconfRespItemIE NBAP-PROTOCOL-IES ::= {

```

```

{ ID id-DSCH-Setup-RL-ReconfRespItem      CRITICALITY ignore      TYPE DSCH-Setup-RL-ReconfRespItem      PRESENCE optional   },
...
}

DSCH-Setup-RL-ReconfRespItem ::= SEQUENCE {
  dSCH-ID          DSCH-ID,
  bindingID        BindingID,
  transportLayerAddress TransportLayerAddress
}

DSCH-ModifyList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofDSCHs)) OF
  ProtocolIE-Container {{DSCH-Modify-RL-ReconfRespItemIE} }

DSCH-Modify-RL-ReconfRespItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-DSCH-Modify-ReconfRespItem  CRITICALITY ignore      TYPE DSCH-Modify-RL-ReconfRespItem  PRESENCE optional },
  ...
}

DSCH-Modify-RL-ReconfRespItem ::= SEQUENCE {
  dSCH-ID          DSCH-ID,
  bindingID        BindingID,
  transportLayerAddress TransportLayerAddress
}

USCH-ModifyList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
  ProtocolIE-Container {{USCH-Modify-RL-ReconfRespItemIE} }

USCH-Modify-RL-ReconfRespItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-USCH-Modify-RL-ReconfRespItem  CRITICALITY ignore      TYPE USCH-Modify-RL-ReconfRespItem  PRESENCE optional },
  ...
}

USCH-Modify-RL-ReconfRespItem ::= SEQUENCE {
  uSCH-ID          USCH-ID,
  cCTrCH-ID        CCTrCH-ID,
  transportFormatSet TransportFormatSet,
}

USCH-ModifyList-RL-ReconfResp ::= SEQUENCE (SIZE (1..maxnoofUSCHs)) OF
  ProtocolIE-Container {{USCH-Modify-RL-ReconfRespItemIE} }

USCH-Modify-RL-ReconfRespItemIE NBAP-PROTOCOL-IES ::= {
  { ID id-USCH-Modify-RL-ReconfRespItem      CRITICALITY ignore      TYPE USCH-Modify-RL-ReconfRespItem      PRESENCE optional },
  ...
}

USCH-Modify-RL-ReconfRespItem ::= SEQUENCE {
  uSCH-ID          USCH-ID,
  cCTrCH-ID        CCTrCH-ID      OPTIONAL,
  transportFormatSet TransportFormatSet  OPTIONAL,
}

```

```

RadioLinkReconfigurationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- RADIO LINK DELETION REQUEST
-- 
-- *****

RadioLinkDeletionRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RadioLinkDeletionRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkDeletionRequest-Extensions}} OPTIONAL,
    ...
}

RadioLinkDeletionRequest-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID      CRITICALITY ignore      TYPE NodeB-CommunicationContextID      PRESENCE mandatory } |
    { ID id-RL-informationList-RL-Del-Req     CRITICALITY ignore      TYPE RL-informationList-RL-Del-Req     PRESENCE mandatory } ,
    ...
}

RadioLinkDeletionRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-informationList-RL-Del-Req ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{RL-informationList-RL-Del-ReqItemIE} }

RL-informationList-RL-Del-ReqItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RL-informationList-RL-Del-ReqItem   CRITICALITY ignore      TYPE RL-informationList-RL-Del-ReqItem   PRESENCE mandatory } ,
    ...
}

RL-informationList-RL-Del-ReqItem ::= SEQUENCE {
    rL-ID           RL-ID
}

-- *****
-- 
-- RADIO LINK DELETION RESPONSE
-- 
-- *****

RadioLinkDeletionResponse ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{RadioLinkDeletionResponse-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkDeletionResponse-Extensions}} OPTIONAL,
    ...
}

```

```

}

RadioLinkDeletionResponse-IES NBAP-PROTOCOL-IES ::= {
  { ID id-CRNC-CommunicationContextID      CRITICALITY ignore   TYPE CRNC-CommunicationContextID      PRESENCE mandatory } |
  { ID id-CriticalityDiagnostic           CRITICALITY ignore   TYPE CriticalityDiagnostic        PRESENCE optional
  },
  ...
}

RadioLinkDeletionResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- DL POWER CONTROL REQUEST FDD
-- *****
DLPowerControlRequestFDD ::= SEQUENCE {
  protocolIES          ProtocolIE-Container    {{DLPowerControlRequestFDD-IES}} ,
  protocolExtensions   ProtocolExtensionContainer {{DLPowerControlRequestFDD-Extensions}}          OPTIONAL,
  privateExtensions    PrivateExtensionContainer {{DLPowerControlRequestFDD-PrivateExtensions}}       OPTIONAL,
  ...
}

DLPowerControlRequestFDD-IES NBAP-PROTOCOL-IES ::= {
  { ID id-NodeB-CommunicationContextID      CRITICALITY ignore   TYPE NodeB-CommunicationContextID      PRESENCE mandatory } |
  { ID id-ProcedureScopeType                CRITICALITY ignore   TYPE ProcedureScopeType            PRESENCE mandatory } ,
  ...
}

DLPowerControlRequestFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

DLPowerControlRequestFDD-PrivateExtensions NBAP-PRIVATE-EXTENSION ::= {
  ...
}

ProcedureScopeType ::= CHOICE {
  all-RL             All-RL,
  individualRL      IndividualRL
}

All-RL ::= SEQUENCE {
  dl-ReferencePower  DL-Power
}

```

```

IndividualRL ::= SEQUENCE {
    dl-ReferencePowerInformationList-PC
}                                         DL-ReferencePowerInformationList-PC

DL-ReferencePowerInformationList-PC ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{DL-ReferencePowerInformationList-PCItemIE }}

DL-ReferencePowerInformationList-PCItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-DL-ReferencePowerInformationList-PCItem      CRITICALITY      ignore      TYPE      DL-ReferencePowerInformationList-PCItem      PRESENCE
        mandatory
    },
    ...
}

DL-ReferencePowerInformationList-PCItem ::= SEQUENCE {
    rL-ID          RL-ID,
    dl-ReferencePower      DL-Power
}

-- *****
-- DEDICATED MEASUREMENT INITIATION REQUEST
-- *****

DedicatedMeasurementInitiationRequest ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container {{DedicatedMeasurementInitiationRequest-IEs}},
    protocolExtensions     ProtocolExtensionContainer {{DedicatedMeasurementInitiationRequest-Extensions}}                                OPTIONAL,
    ...
}

DedicatedMeasurementInitiationRequest-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID      CRITICALITY ignore      TYPE NodeB-CommunicationContextID      PRESENCE mandatory } |
    { ID id-MeasurementID      CRITICALITY ignore      TYPE MeasurementID      PRESENCE mandatory } |
    { ID id-DedicatedMeasurementObjectType-Req  CRITICALITY ignore      TYPE DedicatedMeasurementObjectType-Req  PRESENCE mandatory } |
    { ID id-DedicatedMeasurementType      CRITICALITY ignore      TYPE DedicatedMeasurementType      PRESENCE mandatory } |
    { ID id-MeasurementCharacteristics      CRITICALITY ignore      TYPE MeasurementCharacteristics      PRESENCE mandatory } |
    { ID id-ReportCharacteristics      CRITICALITY ignore      TYPE ReportCharacteristics      PRESENCE mandatory } ,
    ...
}

DedicatedMeasurementInitiationRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

DedicatedMeasurementObjectType-Req ::= ENUMERATED {
    rL          RL-DMeasureReq,
    all-RL      All-DMeasureReq
}

```

```

RL-DMeasureReq ::= SEQUENCE {
    rL-InformationList  RL-InformationList-DMeasureReq
}

RL-InformationList-DMeasureReq ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{ RL-InformationList-DMeasureReqItemIE }}

RL-InformationList-DMeasureReqItemIE NBAP-PROTOCOL-IES ::= {
{ ID id-RL-InformationList-DMeasureReqItem  CRITICALITY ignore
TYPE     RL-InformationList-DMeasureReqItem  PRESENCE mandatory
},
...
}

RL-InformationList-DMeasureReqItem ::= SEQUENCE {
    rL-ID          RL-ID,
    dPCH-ID        DPCH-ID
}

All-RL-Req ::= SEQUENCE {
    dedicatedMeasurementValue  DedicatedMeasurementValue
}

-- *****
-- 
-- DEDICATED MEASUREMENT INITIATION RESPONSE
-- 
-- *****

DedicatedMeasurementInitiationResponse ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container {{DedicatedMeasurementInitiationResponse-IEs}},
    protocolExtensions    ProtocolExtensionContainer {{DedicatedMeasurementInitiationResponse-Extensions}} OPTIONAL,
    ...
}

DedicatedMeasurementInitiationResponse-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID  CRITICALITY ignore      TYPE CRNC-CommunicationContextID  PRESENCE mandatory } |
    { ID id-MeasurementID                CRITICALITY ignore      TYPE MeasurementID                 PRESENCE mandatory } |
    { ID id-DedicatedMeasurementObjectType-Resp CRITICALITY ignore  TYPE DedicatedMeasurementObjectType-Resp PRESENCE mandatory } |
    { ID id-CFN                         CRITICALITY ignore      TYPE CFN                           PRESENCE mandatory } |
{ ID id-CriticalityDiagnostic        CRITICALITY ignore      TYPE CriticalityDiagnostic       PRESENCE optional
},
...
}

DedicatedMeasurementInitiationResponse-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

DedicatedMeasurementObjectType-Resp ::= ENUMERATED {

```

```

rL          RL-Resp,
all-RL      All-RL-resp
}

RL-Resp ::= SEQUENCE {
    rL-InformationList-DMeasureResponse
}                                     RL-InformationList-DmeasureResponse

RL-InformationList-DmeasureResponse ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
ProtocolIE-Container {{RL-Information-DMeasureResponseItemIE} }

RL-Information-DMeasureResponseItemIE NBAP-PROTOCOL-IES ::= {
{ ID id-RL-Information-DMeasureResponseItem   CRITICALITY ignore      TYPE      RL-Information-DMeasureResponseItem PRESENCE mandatory
},
...
}

RL-Information-DMeasureResponseItem ::= SEQUENCE {
    rL-ID           RL-ID,
    dedicatedMeasurementValue   DedicatedMeasurementValue
}

All-RL-Resp ::= SEQUENCE {
    dedicatedMeasurementValue   DedicatedMeasurementValue
}

-- *****
-- 
-- DEDICATED MEASUREMENT INITIATION FAILURE
-- 
-- *****

DedicatedMeasurementInitiationFailure ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container   {{DedicatedMeasurementInitiationFailure-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementInitiationFailure-Extensions}}           OPTIONAL,
    ...
}

DedicatedMeasurementInitiationFailure-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID   CRITICALITY ignore      TYPE CRNC-CommunicationContextID   PRESENCE mandatory } |
    { ID id-MeasurementID                CRITICALITY ignore      TYPE MeasurementID                  PRESENCE mandatory } |
    { ID id-Cause                       CRITICALITY ignore      TYPE Cause                      PRESENCE mandatory } |
{ ID id-CriticalityDiagnostic        CRITICALITY ignore      TYPE CriticalityDiagnostic   PRESENCE optional
},
...
}

DedicatedMeasurementInitiationFailure-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- ****
-- DEDICATED MEASUREMENT REPORT
-- ****

DedicatedMeasurementReport ::= SEQUENCE {
    protocolIEs           ProtocolIE-Container   {{DedicatedMeasurementReport-IEs}},
    protocolExtensions     ProtocolExtensionContainer {{DedicatedMeasurementReport-Extensions}} OPTIONAL,
    ...
}

DedicatedMeasurementReport-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID   CRITICALITY ignore      TYPE CRNC-CommunicationContextID   PRESENCE mandatory } |
    { ID id-MeasurementID                 CRITICALITY ignore      TYPE MeasurementID                  PRESENCE mandatory } |
    { ID id-DedicatedMeasurementObjectType-Rep CRITICALITY ignore      TYPE DedicatedMeasurementObjectType-Rep   PRESENCE mandatory } |
    { ID id-CFN                          CRITICALITY ignore      TYPE CFN                           PRESENCE mandatory },
    ...
}

DedicatedMeasurementReport-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

DedicatedMeasurementObjectType-Rep ::= ENUMERATED {
    rL                      RL-Rep,
    all-RL                  All-RL-Rep
}

RL-Rep ::= SEQUENCE {
    rL-InformationList-DMeasureReport          RL-InformationList-DMeasureReport
}

RL-InformationList-DmeasureReport ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{RL-Information-DMeasureReportItemIE} }

RL-Information-DMeasureReportItemIE NBAP-PROTOCOL-IES ::= {
    { ID id-RL-Information-DMeasureReportItem  CRITICALITY ignore      TYPE RL-Information-DMeasureReportItem   PRESENCE mandatory },
    ...
}

RL-Information-DMeasureReportItem ::= SEQUENCE {
    rL-ID                   RL-ID,
    dedicatedMeasurementValue   DedicatedMeasurementValue
}

All-RL-Rep ::= SEQUENCE {
    dedicatedMeasurementValue   DedicatedMeasurementValue
}

```

```

-- ****
-- DEDICATED MEASUREMENT TERMINATION REQUEST
--
-- ****

DedicatedMeasurementTerminationRequest ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container   {{DedicatedMeasurementTerminationRequest-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementTerminationRequest-Extensions}} OPTIONAL,
OPTIONAL,
    ...
}

DedicatedMeasurementTerminationRequest-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID      CRITICALITY ignore      TYPE NodeB-CommunicationContextID      PRESENCE mandatory } |
    { ID id-MeasurementID                      CRITICALITY ignore      TYPE MeasurementID                      PRESENCE mandatory },
    ...
}

DedicatedMeasurementTerminationRequest-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- ****
-- DEDICATED MEASUREMENT FAILURE INDICATION
--
-- ****

DedicatedMeasurementFailureIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container   {{DedicatedMeasurementFailureIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{DedicatedMeasurementFailureIndication-Extensions}} OPTIONAL,
OPTIONAL,
    ...
}

DedicatedMeasurementFailureIndication-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID      CRITICALITY ignore      TYPE CRNC-CommunicationContextID      PRESENCE mandatory } |
    { ID id-MeasurementID                      CRITICALITY ignore      TYPE MeasurementID                      PRESENCE mandatory } |
    { ID id-Cause                            CRITICALITY ignore      TYPE Cause                            PRESENCE mandatory } |
    { ID id-CriticalityDiagnostic            CRITICALITY ignore      TYPE CriticalityDiagnostic            PRESENCE optional
    },
    ...
}

DedicatedMeasurementFailureIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- ****
-- 
-- RADIO LINK FAILURE INDICATION
-- 
-- ****

RadioLinkFailureIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container     {{RadioLinkFailureIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkFailureIndication-Extensions}}                                OPTIONAL,
    ...
}

RadioLinkFailureIndication-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID      CRITICALITY ignore      TYPE CRNC-CommunicationContextID      PRESENCE mandatory } | 
    { ID id-RL-InformationList-RL-FailInd    CRITICALITY ignore      TYPE RL-InformationList-RL-FailInd    PRESENCE mandatory } |
{ ID id-CriticalityDiagnostic            CRITICALITY ignore      TYPE CriticalityDiagnostic        PRESENCE optional
},
...
}

RadioLinkFailureIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

RL-InformationList-RL-FailInd ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
    ProtocolIE-Container {{ RL-InformationList-RL-FailIndItemIE }}

RL-InformationList-RL-FailInd ItemIE NBAP-PROTOCOL-IES ::= {
    { I D id- RL-InformationList-RL-FailIndItem CRITICALITY ignore      TYPE RL-InformationList-RL-FailIndItem      PRESENCE mandatory },
    ...
}

RL-InformationList-RL-FailIndItem ::= SEQUENCE {
    rL-ID           RL-ID,
    cause          Cause
}

-- ****
-- 
-- RADIO LINK RESTORE INDICATION
-- 
-- ****

RadioLinkRestoreIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container     {{RadioLinkRestoreIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{RadioLinkRestoreIndication-Extensions}}                                OPTIONAL,
    ...
}

```

```

}

RadioLinkRestoreIndication-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-CRNC-CommunicationContextID   CRITICALITY ignore      TYPE CRNC-CommunicationContextID  PRESENCE mandatory } | 
  { ID id-RL-InformationList-RL-RestoreInd  CRITICALITY ignore    TYPE RL-InformationList-RL-RestoreInd  PRESENCE mandatory }, 
  ...
}

RadioLinkRestoreIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

RL-InformationList-RL-RestoreInd ::= SEQUENCE (SIZE (1..maxnoofRLs)) OF
  ProtocolIE-Container {{RL-InformationList-RL-RestoreIndItemIE} }

RL-InformationList-RL-RestoreIndItemIE NBAP-PROTOCOL-IES ::= {
  { I D id-RL-InformationList-RL-RestoreIndItem  CRITICALITY ignore      TYPE RL-InformationList-RL-RestoreIndItem  PRESENCE mandatory }, 
  ...
}

RL-InformationList-RL-RestoreIndItem ::= SEQUENCE {
  rL-ID          RL-ID
}

-- ****
-- 
-- COMRESSED MODE PREPARE FDD
-- 
-- ****

CompressedModePrepareFDD ::= SEQUENCE {
  protocolIEs           ProtocolIE-Container {{CompressedModePrepareFDD-IEs}},
  protocolExtensions     ProtocolExtensionContainer {{CompressedModePrepareFDD-Extensions}}                               OPTIONAL,
  ...
}

CompressedModePrepareFDD-IEs NBAP-PROTOCOL-IES ::= {
  { ID id-NodeB-CommunicationContextID   CRITICALITY ignore      TYPE NodeB-CommunicationContextID  PRESENCE mandatory } | 
  { ID id-TGP1                  CRITICALITY ignore      TYPE TGP1          PRESENCE mandatory } | 
  { ID id-TGP2                  CRITICALITY ignore      TYPE TGP2          PRESENCE optional } | 
  { ID id-TGL                   CRITICALITY ignore      TYPE TGL           PRESENCE mandatory } | 
  { ID id-TGD                   CRITICALITY ignore      TYPE TGD           PRESENCE mandatory } | 
  { ID id-UL-DL-CompressedModeSeletion  CRITICALITY ignore      TYPE UL-DL-CompressedModeSeletion  PRESENCE mandatory } | 
  { ID id-CompressesModeMethod       CRITICALITY ignore      TYPE CompressesModeMethod        PRESENCE mandatory } | 
  { ID id-GapPositionMode          CRITICALITY ignore      TYPE GapPositionMode         PRESENCE mandatory } | 
  { ID id-SN                      CRITICALITY ignore      TYPE SN             PRESENCE optional } | 
  -- This IE is present if Gap position mode = 'flexible position'-- 
  { ID id-DL-FrameType            CRITICALITY ignore      TYPE DL-FrameType        PRESENCE mandatory } | 
  { ID id-ScramblingCodeChange    CRITICALITY ignore      TYPE ScramblingCodeChange    PRESENCE optional } | 
  -- This IE is present if Compressed mode method = 'SF/2' --
}

```

```

{ ID id-PowerControlMode      CRITICALITY ignore      TYPE PowerControlMode      PRESENCE mandatory } |
{ ID id-PowerResumeMode       CRITICALITY ignore      TYPE PowerResumeMode      PRESENCE mandatory } |
{ ID id-UL-DeltaEb-No        CRITICALITY ignore      TYPE UL-DeltaEb-No        PRESENCE mandatory } |
{ ID id-UL-DeltaEb-NoAfter   CRITICALITY ignore      TYPE UL-DeltaEb-NoAfter   PRESENCE mandatory } ,
}

CompressedModePrepareFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- COMRESSED MODE READY FDD
-- 

CompressedModeReadyFDD ::= SEQUENCE {
  protocolIEs                  ProtocolIE-Container    {{CompressedModeReadyFDD-IEs}},
  protocolExtensions            ProtocolExtensionContainer {{CompressedModeReadyFDD-Extensions}}           OPTIONAL,
  ...
}

CompressedModeReadyFDD-IES NBAP-PROTOCOL-IES ::= {
  { ID id-CRNCCommunicationContextID   CRITICALITY ignore      TYPE CRNC-CommunicationContextID PRESENCE mandatory } ,
  ...
}

CompressedModeReadyFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
  ...
}

-- *****
-- 
-- COMRESSED MODE COMMIT FDD
-- 

CompressedModeCommitFDD ::= SEQUENCE {
  protocolIEs                  ProtocolIE-Container    {{CompressedModeCommitFDD-IEs}},
  protocolExtensions            ProtocolExtensionContainer {{CompressedModeCommitFDD-Extensions}}           OPTIONAL,
  ...
}

CompressedModeCommitFDD-IES NBAP-PROTOCOL-IES ::= {
  { ID id-NodeB-CommunicationContextID   CRITICALITY ignore      TYPE NodeB-CommunicationContextID PRESENCE mandatory } |
  { ID id-CFN               CRITICALITY ignore      TYPE CFN          PRESENCE mandatory } ,
  ...
}

```

```

CompressedModeCommitFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- COMPRESSED MODE FAILURE FDD
-- 
-- *****

CompressedModeFailureFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CompressedModeFailureFDD-IES}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModeFailureFDD-Extensions}} OPTIONAL,
    ...
}

CompressedModeFailureFDD-IES NBAP-PROTOCOL-IES ::= {
    { ID id-CRNC-CommunicationContextID   CRITICALITY ignore      TYPE CRNC-CommunicationContextID   PRESENCE mandatory } |
    { ID id-Cause                      CRITICALITY ignore      TYPE Cause                  PRESENCE mandatory } |
    { ID id-CriticalityDiagnostic     CRITICALITY ignore      TYPE CriticalityDiagnostic  PRESENCE optional
    },
    ...
}

CompressedModeFailureFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

-- *****
-- 
-- COMPRESSED MODE CANCEL FDD
-- 
-- *****

CompressedModeCancelFDD ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container {{CompressedModeCancelFDD-IES}},
    protocolExtensions   ProtocolExtensionContainer {{CompressedModeCancelFDD-Extensions}} OPTIONAL,
    ...
}

CompressedModeCancelFDD-IES NBAP-PROTOCOL-IES ::= {
    { ID id-NodeB-CommunicationContextID   CRITICALITY ignore      TYPE NodeB-CommunicationContextID  PRESENCE mandatory },
    ...
}

CompressedModeCancelFDD-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

```

```

-- ****
-- 
-- ERROR INDICATION
-- 
-- ****

ErrorIndication ::= SEQUENCE {
    protocolIEs          ProtocolIE-Container     {{ErrorIndication-IEs}},
    protocolExtensions   ProtocolExtensionContainer {{ErrorIndication-Extensions}}           OPTIONAL,
    ...
}

ErrorIndication-IEs NBAP-PROTOCOL-IES ::= {
    { ID id-Cause           CRITICALITY ignore      TYPE Cause                  PRESENCE mandatory } |
    { ID id-CRNC-CommunicationContextID   CRITICALITY ignore      TYPE CRNC-CommunicationContextID   PRESENCE optional } |
-- This IE is only present when message is transmitted by RNC --
    { ID id-NodeB-CommunicationContextID   CRITICALITY ignore      TYPE NodeB-CommunicationContextID   PRESENCE optional } |
-- This IE is only present when message is transmitted by NodeB --
    { ID id-CriticalityDiagnostic   CRITICALITY ignore      TYPE L3-CriticalityDiagnostic   PRESENCE optional },
    -- At least either or Cause IE or Criticality Diagnostic IE shall be present--
    ...
}

ErrorIndication-Extensions NBAP-PROTOCOL-EXTENSION ::= {
    ...
}

END

```

### 9.3.4 NBAP Information Elements

```

-- ****
-- 
-- Information Element Definitions
-- 
-- ****

NBAP-IES
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

IMPORTS
    maxTFcount,
    maxnoofTFCs,
    maxCTF-1,

```

```
maxRM,  
  
FROM NBAP-Constants;  
  
DTX-InsertionPoint ::= INTEGER  
DedicatedMeasurementValue ::= INTEGER  
DeltaTPC ::= INTEGER  
  
-----  
-- A  
-----  
  
-- to do  
AcknowledgedRA-TriesValue ::= TBD  
  
AddOrDeleteIndicator ::= ENUMERATED {  
add,  
delete  
}  
  
AICH-TransmissionTiming ::= ENUMERATED {  
timing0,  
timing1  
}  
  
AvailabilityStatus ::= ENUMERATED {  
empty,  
in-test,  
failed,  
power-off,  
off-line,  
off-duty,  
dependency,  
degraded,  
not-installed,  
log-full,  
...  
}  
  
--to do  
AveragingDuration ::= TBD  
  
-----  
-- B  
-----  
  
BCCH-ModificationTime ::= INTEGER (0 | 2 | 4 | .. | 4095)  
BindingID ::= OCTET STRING (SIZE (4))
```

```
BlockingPriorityIndicator ::= ENUMERATED {
    high,
    normal,
    low
}
-- High priority: Block resource immediately.
-- Normal priority: Block resource when idle or upon timer expiry.
-- Low priority: Block resource when idle.

BurstType ::= ENUMERATED {
    type1,
    type2
}

-----
-- C
-----

Cause ::= ENUMERATED {
    radioNetworkLayer      RadioNetworkLayerCause,
    transportLayer         TransportLayerCause,
    protocol               ProtocolCause,
    misc                  MiscellaneousCause
    ...
}

CCTrCH-ID ::= INTEGER (1..15)

CellID-Length ::= ENUMERATED {
    short,
    medium,
    long
}

CFN ::= INTEGER (0..255)

ChipOffset ::= INTEGER (0..38399)

C-ID ::= INTEGER (0..65535)

CodingRate ::= ENUMERATED {
    rate1-2,
    rate1-3
}

CommonMeasurementObjectType ::= ENUMERATED {
    cell,
    rach,
    ...
}
```

```

CommonMeasurementType ::= SEQUENCE {
    rssi                  RSSI-Value,
    transmitted-carrier-power      TransmittedCarrierPowerValue,
    acknowledged-ra-tries          AcknowledgedRA-TriesValue,
    time-slot-iscp                TimeSlotISCP-Value,
    ...
}

CommonPhysicalChannelID ::= INTEGER (0..255)

CommonTransportChannelID ::= INTEGER (0..255)

CommunicationControlPortID ::= INTEGER (0..65535)

CompressedModeMethod ::= ENUMERATED {
    puncturing,
    sF-2,
    gating,
    none
}

ConfigurationGenerationID ::= INTEGER (0..255)

CRC-Size ::= ENUMERATED {
    size0,
    size12,
    size16,
    size24
}

CRNC-CommunicationContextID ::= INTEGER (0..1048575)

CTFC ::= INTEGER (0..maxCTF-1)

-----
-- D
-----

DCH-CombinationInd ::= INTEGER (0..255)

DCH-ID ::= INTEGER (0..255)

DedicatedMeasurementObjectType1 ::= ENUMERATED {
    cell,
    rach,
    ...
}

DedicatedMeasurementObjectType2 ::= SEQUENCE {
    sir-value        SIR-Value        OPTIONAL,
}

```

```
sir-error-value      SIR-ErrorValue          OPTIONAL,
transmitted-code-power TransmittedCodePowerValue  OPTIONAL,
time-slot-iscp       TimeSlotISCP-Value    OPTIONAL,
...
}
```

```
DedicatedMeasurementObjectType3 ::= ENUMERATED {
  rl,
  all-rl,
  ...
}
```

-- Reference: 25.215 and 25.225

```
DedicatedMeasurementType ::= ENUMERATED {
  sir,
  sir-error,
  transmitted-code-power,
  timeslot-iscp,
  ...
}
```

```
D-FieldLength ::= ENUMERATED {
d-length1,
d-length2
}
```

```
DiversityControlField ::= ENUMERATED {
may,
must,
must-not
}
```

```
DiversityIndication ::= ENUMERATED {
combined,
not-combined
}
```

```
DiversityMode ::= ENUMERATED {
none,
STTD,
closed-loop-mode1,
closed-loop-mode2
}
```

```
DL-DPCH-SlotFormat ::= INTEGER (0..16)
```

```
DL-FrameType ::= ENUMERATED {
typeA,
typeB
}
```

```

-- -35..15 is transformed into 0..50. 0.1 steps gives 0..500
-- Power0 indicates -35dB, Power1 indicates -34.9dB, ..., Power500 indicates 15dB
DL-Power ::= ENUMERATED {
power0,
power1,
...
}

-- 0= Primary scrambling code of the cell, 1..15= Secondary scrambling code --
DL-ScramblingCode ::= INTEGER (0..15)

DPCH-ID ::= INTEGER (0..15)

DPCH-Offset ::= INTEGER (0..255)

DSCH-ID ::= INTEGER (0..255)

-- to do
-- the parameter need to be defined. It may correspond to the DL TFS defined for DCH
DSCH-TransportFormatSet ::= TBD

-- to do
-- the parameter need to be defined. It may correspond to the DL TFS defined for DCH
DSCH-TransportFormatCombinationSet ::= TBD

DTX-InsertionPosition ::= ENUMERATED {
fixed,
flexible
}

DynamicTransportFormatInformation ::= SEQUENCE (SIZE (1..maxTFcount)) OF
SEQUENCE {
    numberOfTransportBlocks      NumberOfTransportBlocks,
    transportBlockSize          TransportBlockSize OPTIONAL
    -- This IE is only present if Number of Transport Blocks is greater than 0 --,
    mode-dynamicTFS            Mode-DynamicTFS
    ...
}

-----
-- E
-----

EventA ::= SEQUENCE {
    measurementThreshold      MeasurementThreshold,
    measurementHysteresisTime MeasurementHysteresisTime OPTIONAL
}

EventB ::= SEQUENCE {
    measurementThreshold      MeasurementThreshold,
}

```

```

    measurementHysteresisTime      MeasurementHysteresisTime  OPTIONAL
}

EventC ::= SEQUENCE {
    measurementIncreaseThreshold  MeasurementIncreaseThreshold,
    measurementChangeTime         MeasurementChangeTime
}

EventD ::= SEQUENCE {
    measurementDecreaseThreshold MeasurementDecreaseThreshold,
    measurementChangeTime         MeasurementChangeTime
}

EventE ::= SEQUENCE {
    measurementThreshold1        MeasurementThreshold1,
    measurementThreshold2        MeasurementThreshold2  OPTIONAL,
    measurementHysteresisTime    MeasurementHysteresisTime  OPTIONAL,
    reportPeriodicity            ReportPeriodicity      OPTIONAL
}

EventF ::= SEQUENCE {
    measurementThreshold1        MeasurementThreshold1,
    measurementThreshold2        MeasurementThreshold2  OPTIONAL,
    measurementHysteresisTime    MeasurementHysteresisTime  OPTIONAL,
    reportPeriodicity            ReportPeriodicity      OPTIONAL
}

-----
-- F
-----

-- The maximum value is equal to the DL spreading factor --
FDD-DL-ChannalisationCodeNumber ::= INTEGER(0.. 255)

-- 0: 0 chip, 1: 256 chip, 2: 512 chip, .. ,149: 38144 chip [TS 25.211] --
FDD-S-CCPCH-Offset ::= INTEGER (0.. 149)

-- 0=lower priority, 15=higher priority --
FrameHandlingPriority ::= INTEGER (0..15)

-----
-- G
-----

GapPeriod ::= INTEGER(0..255)

Gap Position Mode ::= ENUMERATED {
    fixed,

```

```
flexible
}

-----
-- H
-----

-----
-- I
-----

-- to do
IB-SG ::= BIT STRING

IB-SG-POS ::= INTEGER (0..4095)

IB-SG-REP ::= INTEGER {rep(16), rep(32), rep(64), rep(128), rep(256), rep(512), rep(1024), rep(2048)}

IB-Type :: Enumerated {
MIB,
SIB1,
SIB2,
SIB12
}

IndicationType ::= ENUMERATED {
noFailure,
serviceImpacting,
cellControl,
...
}

-----
-- J
-----

-----
-- L
-----

LocalCell-ID ::= INTEGER (0..268435455)

-----
-- M
-----

-- dBm, granularity 1 dBm
-- dl-power0 indicates 0 dBm
MaximumDL-PowerCapability ::= ENUMERATED{
dl-power0,
dl-power1,
dl-power2,
```

```
...
}

-- Unit dBm, 0 to 50, Granularity 1 dB
MaximumTransmissionPower ::= ENUMERATED {
power0,
power1,
power2,
...
}

MaxNumberOfUL-DPDCHs ::= INTEGER (1..6)

MaxPRACH-MidambleShifts ::= ENUMERATED {
shift4,
shift8
}

-- 10ms to 1min, Step10ms
MeasurementChangeTime ::= ENUMERATED {
time10ms,
time20ms,
time30ms,
...
}

MeasurementCharacteristics ::= SEQUENCE {
    measurementFrequency      MeasurementFrequency,
    averagingDuration        AveragingDuration
}

-- to do
MeasurementDecreaseThreshold ::= TBD

-- to do
MeasurementFrequency ::= TBD

-- to do
MeasurementIncreaseThreshold ::= TBD

-- to do
-- 10ms to 1min, Step10ms --
MeasurementHysteresisTime ::= ENUMERATED {
time10ms,
timm20ms,
time30ms,
...
}

MeasurementID ::= INTEGER (0..1048575)
```

```

-- to do
MeasurementThreshold ::= TBD

-- to do
MeasurementThreshold1 ::= TBD

-- to do
MeasurementThreshold2 ::= TBD

MeasurementType ::= ENUMERATED {
  sCH,
  syncRACH-access
}

MessageDiscriminator ::= ENUMERATED {
  common,
  dedicated
}

MidambleShift ::= INTEGER (0..15)

MinimumSpreadingFactor ::= ENUMERATED {
  sF4,
  sF16,
  sF32,
  sF64,
  sF128,
  sF256,
  sF512
}

MinUL-ChannelisationCodeLength ::= ENUMERATED {
  code-length4,
  code-length8,
  code-length16,
  code-length32,
  code-length64,
  code-length128,
  code-length256
}

MiscellaneousCause ::= ENUMERATED {
  control-processing-overload,
  hardware-failure,
  oam-intervention,
  not-enough-user-plane-processing-resources,
  unspecified
}

Mode-DynamicTFS ::= CHOICE {

```

```
tdd-mode-dynamic    TransmissionTimeInterval-Dynamic,
...
}

Mode-SemiStaticTFS ::= CHOICE {
    tdd-mode-semistatic TransmissionTimeInterval-SemiStatic,
    ...
}

-----
-- N
-----

-- to do
NumberOfChannelElements ::= TBD

NodeB-CommunicationContextID ::= INTEGER (0..1048576)

NumberOfTransportBlocks ::= INTEGER (0..4095)

-----
-- O
-----

-----
-- P
-----

PagingIndicatorLength ::= ENUMERATED {
    ind-length2,
    ind-length4,
    ind-length8
}

PayloadCRC-PresenceIndicator ::= ENUMERATED {
    cRC-Included,
    cRC-NotIncluded
}

PD ::= INTEGER(0..2047)

PICH-Mode ::= ENUMERATED {
    noofPI18,
    noofPI36,
    noofPI72,
    noofPI144
}

PilotBitsUsedIndicator ::= ENUMERATED {
    pilot-bits-used,
    pilot-bits-not-used
}
```

```

}

PowerControlMode ::= ENUMERATED {
pcm0,
pcm1,
...
}

-- Chips. Step size is 3 chips. 0=0 chips, 1=3 chips .. --
--** TODO. -15..40 is transformed to 0..55. 0.1 steps gives 0..550 **
PowerOffset ::= INTEGER (0..24)

PowerResumeMode ::= ENUMERATED {
prm0,
prm1,
...
}

PRACH-Midamble ::= ENUMERATED {
inverted,
direct
}

PreambleScramblingCode ::= INTEGER (0..4095)

-- Bit 0=P0, Bit 1=P1, ... ,Bit 15=P15 [25.213] --
PreambleSignatures ::= BIT STRING (SIZE (16))

-- Unit dBm, -15 to 40, Granularity 0.1 dB
-- cpich-power1 indicates 15 dB
PrimaryCPICH-Power ::= ENUMERATED {
cpich-power1,
cpich-power2,
...
}

PrimaryScramblingCode ::= INTEGER (0..511)

PropagationDelay ::= INTEGER (0..255)

ProtocolCause ::= ENUMERATED
transaction-not-allowed,
transfer-syntax-error,
abstract-syntax-error-reject,
abstract-syntax-error-ignore-and-notify,
message-not-compatible-with-receiver-state,
semantic-error,
unspecified
}

```

```

-- PCCPCH Power unit dBm
-- PCCPCH Power step 0.1dBm
PCCPCH-power ::= INTEGER (-15..40)

PSCH-TimeSlot ::= INTEGER (0..6)

PSCH-Power ::= INTEGER (0..511)

PUSCH-Offset ::= INTEGER (0..255)

-----
-- R
-----

-- SF
RACH-SlotFormat ::= ENUMERATED {
format256,
format128,
format64,
format32
}

-- Bit 0=Sub Channel Number 0, Bit 1=Sub Channel Number 1, ..., Bit 14=Sub Channel Number 14 --
RACH-SubChannelNumbers ::= BIT STRING (SIZE (15))

RadioNetworkLayerCause :: Enumerated {
unknown-C-ID,
cell-not-available,
power-level-not-supported,
ul-scramblingcode-already-in-use,
dl-radio-resources-not-available,
ul-radio-resources-not-available,
rl-Already-ActivatedorAllocated,
nodeB-Resources-Unavailable,
insufficient-physical-channel-resources,
measurement-not-supported-for-the-object,
macrodiversity-combining-not-possible,
reconfiguration-not-allowed,
requested-configuration-not-supported,
synchronization-failure,
unspecified
}

RateMatchingAttribute ::= INTEGER (1..maxRM)

RepetitionLength ::= ENUMERATED {
length1,
length2,
length4,
length8
}

```

```

ReportCharacteristicsType ::= CHOICE {
    onDemand      NULL,
    periodic       ReportPeriodicity,
    event-a        EventA,
    event-b        EventB,
    event-c        EventC,
    event-d        EventD,
    event-e        EventE,
    event-f        EventF
}

-- 10ms to 1min, step 10ms or
-- 1min to 1hour, step 1min
ReportPeriodicity ::= CHOICE {
    msec           INTEGER (1..1000),
    min            INTEGER (1..60)
}

ResourceOperationalState ::= ENUMERATED {
    enabled,
    disabled
}

RLC-Mode ::= ENUMERATED {
    acknowledgedMode,
    unacknowledgedMode,
    transparentMode
}

RL-ID ::= INTEGER (0..31)

RNC-ID ::= INTEGER (0..4095)

-- -30...-100 step 0.1
-- rssil indicates -30
RSSI-Value ::= ENUMERATED {
    rssil,
    rssil2,
    ...
}

ScramblingCodeChange ::= ENUMERATED {
    change,
    no-change
}

Scrambling Code Word Number ::= INTEGER (0..255)

```

```

SecondaryCCPCH-SlotFormat ::= INTEGER(0..8)

SegmentType ::= ENUMERATED {
first,
subsequent,
last,
complete
}

SemiStaticTransportFormatInformation ::= SEQUENCE {
    transmissionTimeInterval      TransmissionTimeInterval,
    typeOfChannelCoding          TypeOfChannelCoding,
    codingRate                  CodingRate      OPTIONAL
    -- This IE is only present if IE Type of channel coding is Convolutional or Turbo --,
    rateMatchingAttribute       RateMatchingAttribute,
    cRC-Size                    CRC-Size,
    mode-semistatic             Mode-SemiStatic
}

S-FieldLength ::= ENUMERATED {
s-length1,
s-length2
}

SIB-DeletionIndicator ::= ENUMERATED {
noDeletion,
deletion
}

SIB-Originator ::= ENUMERATED {
nodeB,
cRNC
}

--** TODO. -10..10 is transformed to 0..10. 0.1 steps gives 0..200 **
-- sir-error-value1 indicates 0 dB
SIR-ErrorValue ::= ENUMERATED {
sir-error-value1,
sir-error-value2,
...
}

--** TODO. -10..20 is transformed to 0..30. 0.1 steps gives 0..300 **
-- sir-value1 indicates 0 dB
SIR-Value ::= ENUMERATED {
sir-value1,
sir-value2,
...
}

```

```
SSDT-CellIdentity ::= ENUMERATED {a, b, c, d, e, f, g, h}
```

```
SSDT-Indication ::= ENUMERATED {
    ssdtActiveInTheUE,
    ssdtNotActiveInTheUE
}
```

```
STTD-Indicator ::= ENUMERATED {
    active,
    inactive
}
```

```
SSDT-SupportIndicator ::= ENUMERATED {
    sSDT-not-supported,
    sSDT-Supported
}
```

```
ShutdownTimer ::= INTEGER (1..3600)
```

```
SynchronisationMethod ::= ENUMERATED {
    external-reference,
    locked-toMaster-cell,
    one-time-synchronisation
}
```

```
-- T
```

```
T-Cell ::= ENUMERATED {
    chip-0,
    chip-256,
    chip-512,
    chip-768,
    chip-1024,
    chip-1280,
    chip-1536,
    chip-1892,
    chip-2048,
    chip-2304
}
```

```
TDD-ChannelisationCode ::= ENUMERATED {
    channelisationCode1-1,
    channelisationCode2-1,
    channelisationCode2-2,
    channelisationCode4-1,
    channelisationCode4-2,
    ...
}
```

```

-- the ChipOffset is -9200 to + 19199
TDD-ChipOffset ::= INTEGER (-19200..19199)

TransmissionTimeInterval-Dynamic ::= SEQUENCE (SIZE (1..maxTTIcount)) OF
    ENUMERATED {tti10, tti20, tti40, tti80}
}

TransmissionTimeInterval-SemiStatic ::= ENUMERATED {
frameRelated,
timeSlotRelated
}

TDD-S-CCPCH-Offset ::= INTEGER (0..63)

TFCI-Presence ::= ENUMERATED {
present,
not-present
}

TFCI-SignallingMode ::= ENUMERATED {
normal,
split
}

TFCS ::= SEQUENCE (SIZE (1..maxnoofTFCs)) OF
    SEQUENCE {
        CTFC           CTFC
    }
}

TFS ::= SEQUENCE {
    dynamicTransportFormatInformation
    semiStaticTransportFormatInformation
}
DynamicTransportFormatInformation,
SemiStaticTransportFormatInformation

TGD ::= = INTEGER (0..255)

TGL ::= INTEGER (3,4,7,10,14)

TimeSlot ::= INTEGER (0..14)

TimeSlotDirection ::= ENUMERATED {
    ul,
    dl
}

-- to do
TimeSlotISCP-Value ::= TBD

```

```

TimeSlotStatus ::= ENUMERATED {
    active,
    not-active
}

ToAWE ::= INTEGER (0..2559) -- msec. --

ToAWS ::= INTEGER (0..1279) -- msec. --

TPC-DownlinkStepSize ::= ENUMERATED {
    step-size0-5,
    step-size1
}

Transmit Diversity Indicator ::= ENUMERATED {
    active,
    Inactive
}

TransmissionTimeInterval ::= ENUMERATED {
    time-interval0,
    time-interval20,
    time-interval40,
    time-interval80
}           -- msec -- 

--** TODO. -35..15 is transformed to 0..50. 0.1 steps gives 0..500 **
-- carrier-power1 indicates 5 dB
TransmittedCarrierPowerValue ::= ENUMERATED {
    carrier-power1,
    carrier-power2,
    ...
}

--** TODO. -35..15 is transformed to 0..50. 0.1 steps gives 0..500 **
-- code-power1 indicated 5 dB
TransmittedCodePowerValue ::= ENUMERATED {
    code-power1,
    code-power2,
    ...
}

TransportBlockSize ::= INTEGER (1..5000)
-- bit --

TSTD-Indicator ::= ENUMERATED {
    active,
    inactive
}

```

```
TransportLayerAddress ::= OCTET STRING (SIZE (1..20, ...))
```

```
TransportLayerCause ::= ENUMERATED {
    transport-link-failure,
    transmission-port-not-available,
    transport-resource-unavailable,
    unspecified
}
```

```
TypeOfChannelCoding ::= ENUMERATED {
    no-coding,
    convolutional,
    turbo
}
```

```
-----  
-- U  
-----
```

```
UARFCN ::= INTEGER (174 .. 474)
```

```
UL-DL-CompressedModeSelection ::= ENUMERATED {
    ul-only,
    dl-only,
    both-UlandDL
}
```

```
UL-DPCH-SlotFormat ::= INTEGER (0..5)
```

```
UL-EbNo ::= INTEGER (0..255)
-- Resolution is 0.1 dB, range 0-25.5 dB --
```

```
UL-FP-Mode ::= ENUMERATED {
    normal,
    silent
}
```

```
-- unit dBm, step 0.1dBm
UL-InterferenceLevel ::= INTEGER (-128..60)
```

```
UL-PunctureLimit ::= INTEGER (0..100)
```

```
UL-ScramblingCode ::= SEQUENCE {
    uL-ScramblingCodeNumber      UL-ScramblingCodeNumber,
    uL-ScramblingCodeLength      UL-ScramblingCodeLength
}
```

```
-- 2^24
UL-ScramblingCodeLength ::= INTEGER (0..16777215)
```

```

UL-ScramblingCodeNumber ::= ENUMERATED {
short,
long
}

UplinkDeltaEb-No ::= ENUMERATED {
deltaEb-No-6dB,
...
}

UplinkDeltaEb-No-after ::= ENUMERATED {
deltaEb-No-after-6dB,
...
}

END

```

### 9.3.5 NBAP Common Data Type Definitions

```

-- ****
-- 
-- Common definitions
-- 
-- ****

NBAP-CommonDataTypes -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS :=

BEGIN

Criticality      ::= ENUMERATED { reject, ignore, notify }

MessageDiscriminator      ::= ENUMERATED { common, dedicated }

Presence      ::= ENUMERATED { optional, conditional, mandatory }

PrivateExtensionID  ::= CHOICE {
    local          INTEGER (0..65535),
    global         OBJECT IDENTIFIER
}

ProcedureID      ::= SEQUENCE {
    procedureCode      INTEGER (0..255),
    ddMode            ENUMERATED { tdd, fdd, common }
}

ProtocolExtensionID ::= INTEGER (0..65535)

ProtocolIE-ID      ::= INTEGER (0..65535)

TransactionID      ::= INTEGER (0..255)

```

END

### 9.3.6 NBAP Extension Definitions

```
-- ****
-- Container definitions
-- ****
NBAP-Containers -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- ****
-- IE parameter types from other modules.
-- ****

IMPORTS
    Criticality,
    Presence,
    PrivateExtensionID,
    ProtocolExtensionID,
    ProtocolIE-ID
FROM NBAP-CommonDataTypes

    maxProtocolExtensions,
    maxPrivateExtensions,
    maxProtocolIEs
FROM NBAP-Constants;

-- ****
-- Class Definition for Protocol IEs
-- ****

NBAP-PROTOCOL-IES ::= CLASS {
    &id      ProtocolIE-ID          UNIQUE,
    &criticality  Criticality,
    &Value,
    &presence   Presence
}
WITH SYNTAX {
    ID      &id
    CRITICALITY &criticality
    TYPE     &Value
}
```

```

PRESENCE      &presence
}

-- ****
-- Class Definition for Protocol IEs
--
-- ****

NBAP-PROTOCOL-IES-PAIR ::= CLASS {
    &id          ProtocolIE-ID           UNIQUE,
    &firstCriticality   Criticality,
    &FirstValue,
    &secondCriticality Criticality,
    &SecondValue,
    &presence       Presence
}
WITH SYNTAX {
    ID          &id
    FIRST CRITICALITY   &firstCriticality
    FIRST TYPE        &FirstValue
    SECOND CRITICALITY &secondCriticality
    SECOND TYPE       &SecondValue
    PRESENCE         &presence
}

-- ****
-- Class Definition for Protocol Extensions
--
-- ****

NBAP-PROTOCOL-EXTENSION ::= CLASS {
    &id          ProtocolExtensionID     UNIQUE,
    &criticality   Criticality,
    &Extension
}
WITH SYNTAX {
    ID          &id
    CRITICALITY &criticality
    EXTENSION   &Extension
}

-- ****
-- Class Definition for Private Extensions
--
-- ****

NBAP-PRIVATE-EXTENSION ::= CLASS {
    &id          PrivateExtensionID,

```

```

    &criticality      Criticality,
    &Extension
}
WITH SYNTAX {
    ID          &id
    CRITICALITY &criticality
    EXTENSION   &Extension
}

-- ****
-- Container for Protocol IEs
--
-- ****

ProtocolIE-Container {NBAP-PROTOCOL-IES : IEsSetParam} ::==
SEQUENCE (SIZE (0..maxProtocolIEs)) OF
ProtocolIE-Field {{IEsSetParam}}


ProtocolIE-Field {NBAP-PROTOCOL-IES : IEsSetParam} ::= SEQUENCE {
    id      NBAP-PROTOCOL-IES.&id      ({IEsSetParam}),
    criticality      NBAP-PROTOCOL-IES.&criticality  ({IEsSetParam}{@id}),
    value       NBAP-PROTOCOL-IES.&Value     ({IEsSetParam}{@id})
}

-- ****
-- Container for Protocol IE Pairs
--
-- ****

ProtocolIE-ContainerPair {NBAP-PROTOCOL-IES-PAIR : IEsSetParam} ::==
SEQUENCE (SIZE (0..maxProtocolIEs)) OF
ProtocolIE-FieldPair {{IEsSetParam}}


ProtocolIE-FieldPair {NBAP-PROTOCOL-IES-PAIR : IEsSetParam} ::= SEQUENCE {
    id          NBAP-PROTOCOL-IES-PAIR.&id      ({IEsSetParam}),
    firstCriticality  NBAP-PROTOCOL-IES-PAIR.&firstCriticality  ({IEsSetParam}{@id}),
    firstValue     NBAP-PROTOCOL-IES-PAIR.&FirstValue     ({IEsSetParam}{@id}),
    secondCriticality NBAP-PROTOCOL-IES-PAIR.&secondCriticality ({IEsSetParam}{@id}),
    secondValue     NBAP-PROTOCOL-IES-PAIR.&SecondValue     ({IEsSetParam}{@id})
}

-- ****
-- Container Lists for Protocol IE Containers
--
-- ****

ProtocolIE-ContainerList {INTEGER : lowerBound, INTEGER : upperBound, NBAP-PROTOCOL-IES : IEsSetParam} ::==
SEQUENCE (SIZE (lowerBound..upperBound)) OF

```

```

ProtocolIE-Container {{IEsSetParam} }

ProtocolIE-ContainerPairList {INTEGER : lowerBound, INTEGER : upperBound, NBAP-PROTOCOL-IES-PAIR : IEsSetParam} ::==
SEQUENCE (SIZE (lowerBound..upperBound)) OF
ProtocolIE-ContainerPair {{IEsSetParam} }

-- ****
-- Container for Protocol Extensions
--
-- ****

ProtocolExtensionContainer {NBAP-PROTOCOL-EXTENSION : ExtensionSetParam} ::==
SEQUENCE (SIZE (1..maxProtocolExtensions)) OF
ProtocolExtensionField {{ExtensionSetParam} }

ProtocolExtensionField {NBAP-PROTOCOL-EXTENSION : ExtensionSetParam} ::= SEQUENCE {
id      NBAP-PROTOCOL-EXTENSION.&id ({ExtensionSetParam}),
criticality NBAP-PROTOCOL-EXTENSION.&criticality ({ExtensionSetParam}{@id}),
extensionValue NBAP-PROTOCOL-EXTENSION.&Extension ({ExtensionSetParam}{@id})
}

-- ****
-- Container for Private Extensions
--
-- ****

PrivateExtensionContainer {NBAP-PRIVATE-EXTENSION : ExtensionSetParam} ::==
SEQUENCE (SIZE (1..maxPrivateExtensions)) OF
PrivateExtensionField {{ExtensionSetParam} }

PrivateExtensionField {NBAP-PRIVATE-EXTENSION : ExtensionSetParam} ::= SEQUENCE {
id      NBAP-PRIVATE-EXTENSION.&id
({ExtensionSetParam}),
criticality      NBAP-PRIVATE-EXTENSION.&criticality
({ExtensionSetParam}{@id}),
extensionValue      NBAP-PRIVATE-EXTENSION.&Extension
({ExtensionSetParam}{@id})
}

END

```

### 9.3.7 Constant Definitions for NBAP

```

-- ****
-- Constant definitions
--
-- ****

```

```

NBAP-Constants -- { object identifier to be allocated }--
DEFINITIONS AUTOMATIC TAGS ::=

BEGIN

-- ****
-- 
-- Elementary Procedures
-- 
-- ****

id-audit                      INTEGER ::= 0
id-auditRequired                INTEGER ::= 1
id-blockResource                 INTEGER ::= 2
id-cellDeletion                  INTEGER ::= 3
id-cellReconfiguration            INTEGER ::= 4
id-cellSetup                     INTEGER ::= 5
id-commonMeasurementFailure      INTEGER ::= 6
id-commonMeasurementInitiation   INTEGER ::= 7
id-commonMeasurementReport       INTEGER ::= 8
id-commonMeasurementTermination  INTEGER ::= 9
id-commonTransportChannelDeletion INTEGER ::= 10
id-commonTransportChannelReconfiguration INTEGER ::= 11
id-commonTransportChannelSetup    INTEGER ::= 12
id-compressedModeControlCancellation INTEGER ::= 13
id-compressedModeControlCommit   INTEGER ::= 14
id-compressedModeControlPreparation  INTEGER ::= 15
id-dedicatedMeasurementFailure   INTEGER ::= 16
id-dedicatedMeasurementInitiation INTEGER ::= 17
id-dedicatedMeasurementReport    INTEGER ::= 18
id-dedicatedMeasurementTermination INTEGER ::= 19
id-dlPowerControl                INTEGER ::= 20
id-neighbourCellMeasurement      INTEGER ::= 21
id-radioLinkAddition              INTEGER ::= 22
id-radioLinkDeletion               INTEGER ::= 23
id-radioLinkFailure                INTEGER ::= 24
id-radioLinkReconfigurationCommit INTEGER ::= 25
id-radioLinkReconfirurationCancel INTEGER ::= 26
id-radioLinkRestoration             INTEGER ::= 27
id-radioLinkSetup                  INTEGER ::= 28
id-resourceStatusIndication        INTEGER ::= 29
id-synchronisationAdjustment       INTEGER ::= 30
id-synchronisationFailure          INTEGER ::= 31
id-synchronisationRestart           INTEGER ::= 32
id-synchronisedRadioLinkReconfigurationPreparation INTEGER ::= 33
id-systemInformationUpdate         INTEGER ::= 34
id-unblockResource                 INTEGER ::= 35
id-unsynchronisedRadioLinkReconfiguration  INTEGER ::= 36

-- ****
-- 

```

```

-- Extension constants
--
-- ****
maxPrivateExtensions      INTEGER ::= 65535
maxProtocolExtensions     INTEGER ::= 65535
maxProtocolIES            INTEGER ::= 65535
-- ****
-- Lists
--
-- ****
maxSF                      INTEGER ::= 10
maxnoofDLCodes              INTEGER ::= 10
maxnoofRLs                  INTEGER ::= 10
maxnoofDPCHs                INTEGER ::= 10
maxnoofSCCPCHs              INTEGER ::= 10
maxnoofPRACHs               INTEGER ::= 10
maxnoofDCHs                 INTEGER ::= 10
maxnoofDSCHs                INTEGER ::= 10
maxnoofFACHs                INTEGER ::= 10
maxnoofCCTrCHs              INTEGER ::= 10
maxnoofPCHs                 INTEGER ::= 10
maxnoofPUCSHs               INTEGER ::= 10
maxnoofTFCs                 INTEGER ::= 10
maxnoofUSCHs                INTEGER ::= 10
maxUCIDinNodeB              INTEGER ::= 10
maxCellinNodeB              INTEGER ::= 10
maxCCPinNodeB               INTEGER ::= 10
maxCTF-1                    INTEGER ::= 10
maxLocalCellinNodeB         INTEGER ::= 10
maxPCHinNodeB               INTEGER ::= 10
maxRACHCell                 INTEGER ::= 10
maxnoofFACHCell              INTEGER ::= 10
maxPCHCell                  INTEGER ::= 10
maxUSCHCell                 INTEGER ::= 10
maxAICHCell                 INTEGER ::= 10
maxMIBSEG                   INTEGER ::= 10
maxSIBSEG                   INTEGER ::= 10
maxnoofFDDNeighbours        INTEGER ::= 10
maxnoofTDDNeighbours        INTEGER ::= 10
maxTFcount                  INTEGER ::= 10
maxnooftFCs                 INTEGER ::= 10
maxFACHCell                  INTEGER ::= 10
maxnoCCTrCH                 INTEGER ::= 10
maxnoCCTrCHs                INTEGER ::= 10
maxnoofCCTrCH               INTEGER ::= 10
maxnoofDPCH                 INTEGER ::= 10
maxnoofPUSHs                 INTEGER ::= 10

```

```

maxnoofRL-1           INTEGER ::= 10
maxnoofRL-2           INTEGER ::= 10
maxRM                 INTEGER ::= 10

-- ****
-- IEs
-- ****

id-AICH-Information-ResourceStatIndItem      INTEGER ::= 0
id-AICH-ParametersList                      INTEGER ::= 1
id-AICH-ParametersListItem                  INTEGER ::= 2
id-AllowedSlotFormatInformationList-Item-CTCHreconf-Req-FDD  INTEGER ::= 3
id-AllowedSlotFormatInformationList-Item-CTCHsetup-Req-FDD   INTEGER ::= 4
id-BlockingPriorityIndicator                INTEGER ::= 5
id-CCTrCH-ParametersList                   INTEGER ::= 6
id-CCTrCH-ParametersListItem              INTEGER ::= 7
id-CFN                                    INTEGER ::= 8
id-CRNC-CommunicationContextID            INTEGER ::= 9
id-CRNC-CommunicationContextID            INTEGER ::= 10
id-Cause                                  INTEGER ::= 11
id-Cell-Information-ResourceStatIndItem    INTEGER ::= 12
id-Cell-InformationItem                   INTEGER ::= 13
id-Cell-InformationList                  INTEGER ::= 14
id-Cell-Parameter                        INTEGER ::= 15
id-Cell-ParametersItem                   INTEGER ::= 16
id-Cell-ParametersList                  INTEGER ::= 17
id-CellParameter                         INTEGER ::= 18
id-CommonMeasurementObjectType          INTEGER ::= 19
id-CommonMeasurementType                INTEGER ::= 20
id-CommonPhysicalChannelID             INTEGER ::= 21
id-CommonPhysicalChannelType-CTCHsetup-Req-FDD  INTEGER ::= 22
id-CommonPhysicalChannelType-CTCHsetup-Response  INTEGER ::= 23
id-CommunicationControlPort-InformationItem  INTEGER ::= 24
id-CommunicationControlPortID            INTEGER ::= 25
id-CommunicationControlPortInformation-ResourceStatIndItem  INTEGER ::= 26
id-CommunicationControlPortInformationList  INTEGER ::= 27
id-CompressesModeMethod                 INTEGER ::= 28
id-ConfigurationGenerationID            INTEGER ::= 29
id-DCH-Add-RL-ReconfPrepFDDItem        INTEGER ::= 30
id-DCH-Add-RL-ReconfPrepTDDItem        INTEGER ::= 31
id-DCH-Add-RL-ReconfReadyItem          INTEGER ::= 32
id-DCH-Add-RL-ReconfReqFDDItem        INTEGER ::= 33
id-DCH-Add-RL-ReconfReqTDDItem        INTEGER ::= 34
id-DCH-AddItem-RL-ReconfResp          INTEGER ::= 35
id-DCH-AddList-RL-ReconfPrepFDD       INTEGER ::= 36
id-DCH-AddList-RL-ReconfPrepTDD       INTEGER ::= 37
id-DCH-AddList-RL-ReconfReqFDD        INTEGER ::= 38
id-DCH-AddList-RL-ReconfReqTDD        INTEGER ::= 39

```

id-DCH-Delete-RL-ReconfPrepFDDItem	INTEGER ::= 40
id-DCH-Delete-RL-ReconfPrepTDDItem	INTEGER ::= 41
id-DCH-Delete-RL-ReconfReqFDDItem	INTEGER ::= 42
id-DCH-Delete-RL-ReconfReqTDDItem	INTEGER ::= 43
id-DCH-DeleteList-RL-ReconfPrepFDD	INTEGER ::= 44
id-DCH-DeleteList-RL-ReconfPrepTDD	INTEGER ::= 45
id-DCH-DeleteList-RL-ReconfReqFDD	INTEGER ::= 46
id-DCH-DeleteList-RL-ReconfReqTDD	INTEGER ::= 47
id-DCH-Information-RL-SetupReqFDDItem	INTEGER ::= 48
id-DCH-Information-RL-SetupReqTDDItem	INTEGER ::= 49
id-DCH-InformationList-RL-SetupReqFDD	INTEGER ::= 50
id-DCH-InformationList-RL-SetupReqTDD	INTEGER ::= 51
id-DCH-InformationResponse-RL-SetupFailFDDItem	INTEGER ::= 52
id-DCH-InformationResponse-RL-setupResTDDItem	INTEGER ::= 53
id-DCH-InformationResponseItem	INTEGER ::= 54
id-DCH-Modify-RL-ReconfPrepFDDItem	INTEGER ::= 55
id-DCH-Modify-RL-ReconfPrepTDDItem	INTEGER ::= 56
id-DCH-Modify-RL-ReconfReadyItem	INTEGER ::= 57
id-DCH-Modify-RL-ReconfReqFDDItem	INTEGER ::= 58
id-DCH-Modify-RL-ReconfReqTDDItem	INTEGER ::= 59
id-DCH-ModifyItem-RL-ReconfResp	INTEGER ::= 60
id-DCH-ModifyList-RL-ReconfPrepFDD	INTEGER ::= 61
id-DCH-ModifyList-RL-ReconfPrepTDD	INTEGER ::= 62
id-DCH-ModifyList-RL-ReconfReqFDD	INTEGER ::= 63
id-DCH-ModifyList-RL-ReconfReqTDD	INTEGER ::= 64
id-DL-CCTrCH-Information-RL-ReconfPrepTDDItem	INTEGER ::= 65
id-DL-CCTrCH-Information-RL-ReconfReqTDDItem	INTEGER ::= 66
id-DL-CCTrCH-Information-RL-SetupReqTDDItem	INTEGER ::= 67
id-DL-CCTrCH-InformationItem	INTEGER ::= 68
id-DL-CCTrCH-InformationList-RL-ReconfPrepTDD	INTEGER ::= 69
id-DL-CCTrCH-InformationList-RL-ReconfReqTDD	INTEGER ::= 70
id-DL-CCTrCH-InformationList-RL-SetupReqTDD	INTEGER ::= 71
id-DL-CCTrCHInformationItem	INTEGER ::= 72
id-DL-CCTrCHInformationList	INTEGER ::= 73
id-DL-CodeInformation	INTEGER ::= 74
id-DL-CodeInformation-RL-ReconfPrepFDDItem	INTEGER ::= 75
id-DL-CodeInformation-RL-SetupReqFDDItem	INTEGER ::= 76
id-DL-DPCH-Information-RL-ReconfPrepFDD	INTEGER ::= 77
id-DL-DPCH-Information-RL-ReconfPrepTDDItem	INTEGER ::= 78
id-DL-DPCH-Information-RL-SetupReqTDDItem	INTEGER ::= 79
id-DL-DPCH-InformationItem	INTEGER ::= 80
id-DL-DPCH-InformationItem-RL-ReconfReqFDD	INTEGER ::= 81
id-DL-DPCH-InformationItem-RL-SetupReqFDD	INTEGER ::= 82
id-DL-FrameType	INTEGER ::= 83
id-DL-ReferencePowerInformationItem	INTEGER ::= 84
id-DSCH-AddItem-RL-ReconfPrepFDD	INTEGER ::= 85
id-DSCH-AddItem-RL-ReconfReqFDD	INTEGER ::= 86
id-DSCH-DeleteItem-RL-ReconfPrepFDD	INTEGER ::= 87
id-DSCH-DeleteItem-RL-ReconfReqFDD	INTEGER ::= 88
id-DSCH-ID	INTEGER ::= 89
id-DSCH-Information-RL-SetupReqFDDItem	INTEGER ::= 90

id-DSCH-InformationList-RL-SetupReqFDD	INTEGER ::= 91
id-DSCH-InformationResponse-RL-SetupFailFDDItem	INTEGER ::= 92
id-DSCH-InformationResponse-RL-setupResFDDItem	INTEGER ::= 93
id-DSCH-ModifyItem-RL-ReconfPreFDD	INTEGER ::= 94
id-DSCH-ModifyItem-RL-ReconfReqFDD	INTEGER ::= 95
id-DedicatedMeasurementObjectType	INTEGER ::= 96
id-DedicatedMeasurementType	INTEGER ::= 97
id-FACH-Information-ResourceStatIndItem	INTEGER ::= 98
id-FACH-InformationItem	INTEGER ::= 99
id-FACH-ListItem	INTEGER ::= 100
id-FACH-ParametersList-CTCHreconf-Req-FDD	INTEGER ::= 101
id-FACH-ParametersList-CTCHreconf-Req-TTD	INTEGER ::= 102
id-FACH-ParametersListItem-CTCHreconf-Req-FDD	INTEGER ::= 103
id-FACH-ParametersListItem-CTCHreconf-Req-TTD	INTEGER ::= 104
id-FACH-ParametersList-CTCHsetup-Req-FDD	INTEGER ::= 105
id-FACH-ParametersList-CTCHsetup-Response	INTEGER ::= 106
id-GapStartingSlotNumber	INTEGER ::= 107
id-IndicationType	INTEGER ::= 108
id-Local-Cell-Information-ResourceStatIndItem	INTEGER ::= 109
id-Local-CellInformation-ResourceStatIndItem	INTEGER ::= 110
id-LocalCell-ID	INTEGER ::= 111
id-LocalCell-InformationItem	INTEGER ::= 112
id-LocalCellInformationList	INTEGER ::= 113
id-MIB-SegmentInformationItem	INTEGER ::= 114
id-MIB-SegmentInformationList	INTEGER ::= 115
id-MaximumTransmissionPower	INTEGER ::= 116
id-MeasuredCellInfo	INTEGER ::= 117
id-MeasurementCharacteristics	INTEGER ::= 118
id-MeasurementID	INTEGER ::= 119
id-MeasurementType	INTEGER ::= 120
id-NeighbouringFDD-Cell-InformationItem	INTEGER ::= 121
id-NeighbouringTDD-Cell-InformationItem	INTEGER ::= 122
id-NodeB-CommunicationContextID	INTEGER ::= 123
id-PCCPCH-Information	INTEGER ::= 124
id-PCH-Information-ResourceStatIndItem	INTEGER ::= 125
id-PCH-InformationItem	INTEGER ::= 126
id-PCH-ListItem	INTEGER ::= 127
id-PCH-Parameters-CTCHreconf-Req-FDD	INTEGER ::= 128
id-PCH-ParametersList	INTEGER ::= 129
id-PCH-ParametersListItem	INTEGER ::= 130
id-PICH-Parameters-CTCHreconf-Req-FDD	INTEGER ::= 131
id-PRACH-ParametersList	INTEGER ::= 132
id-PRACH-ParametersListItem	INTEGER ::= 133
id-PSCH-Information	INTEGER ::= 134
id-PSCHandPCCPCH-Information	INTEGER ::= 135
id-PUSCH-ListItem	INTEGER ::= 136
id-PatternDuration	INTEGER ::= 137
id-PowerControlMode	INTEGER ::= 138
id-PowerResumeMode	INTEGER ::= 139
id-PrimaryCCPCH-Information	INTEGER ::= 140
id-PrimaryCPICH-Information	INTEGER ::= 141

id-PrimarySCH-Information	INTEGER ::= 142
id-PrimaryScramblingCode	INTEGER ::= 143
id-ProcedureScopeType	INTEGER ::= 144
id-RACH-Information-ResourceStatIndItem	INTEGER ::= 145
id-RACH-InformationItem	INTEGER ::= 146
id-RL-ID	INTEGER ::= 147
id-RL-Information	INTEGER ::= 148
id-RL-Information-DMeasureReportItem	INTEGER ::= 149
id-RL-Information-DMeasureRequestItem	INTEGER ::= 150
id-RL-Information-DMeasureResponseItem	INTEGER ::= 151
id-RL-Information-RL-ReconfPrepFDDItem	INTEGER ::= 152
id-RL-Information-RL-SetupReqFDDItem	INTEGER ::= 153
id-RL-InformationItem	INTEGER ::= 154
id-RL-InformationItem-RL-SetupReqTDD	INTEGER ::= 155
id-RL-InformationList	INTEGER ::= 156
id-RL-InformationList-RL-ReconfReqFDD	INTEGER ::= 157
id-RL-InformationList-RL-SetupReqFDD	INTEGER ::= 158
id-RL-InformationResponse-RL-setupResFDDItem	INTEGER ::= 159
id-RL-InformationResponseItem-RL-ReconfResp	INTEGER ::= 160
id-RL-InformationResponseList-RL-ReconfReady	INTEGER ::= 161
id-RL-InformationResponseList-RL-ReconfReadyItem	INTEGER ::= 162
id-RL-InformationResponseList-RL-ReconfResp	INTEGER ::= 163
id-RL-InformationResponseList-RL-setupResFDD	INTEGER ::= 164
id-RL-InformationResponseList-RL-setupRestTDD	INTEGER ::= 165
id-RL-ReconfigurationFailure-RL-ReconfFailItem	INTEGER ::= 166
id-RL-ReconfigurationFailureList-RL-ReconfFail	INTEGER ::= 167
id-RL-ResponseInformation	INTEGER ::= 168
id-RL-ResponseInformationItem	INTEGER ::= 169
id-RL-ResponseInformationList	INTEGER ::= 170
id-RL-informationItem	INTEGER ::= 171
id-RL-informationList	INTEGER ::= 172
id-RadioLinkInformation-RL-ReconfPrepFDDItem	INTEGER ::= 173
id-RadioLinkInformation-RL-ReconfPrepTDD	INTEGER ::= 174
id-RadioLinkInformation-RL-ReconfReqTDD	INTEGER ::= 175
id-RadioLinkInformationList-RL-ReconfPrepFDD	INTEGER ::= 176
id-ReportCharacteristics	INTEGER ::= 177
id-SFN	INTEGER ::= 178
id-SIB-SegmentInformationItem	INTEGER ::= 179
id-SIB-SegmentInformationList	INTEGER ::= 180
id-ScramblingCodeChange	INTEGER ::= 181
id-Secondary-CCPCHListItem	INTEGER ::= 182
id-SecondaryCPICH-Information	INTEGER ::= 183
id-SecondarySCH-Information	INTEGER ::= 184
id-ShutdownTimer	INTEGER ::= 185
id-Successful-RL-InformationResponse-RL-SetupFailFDDItem	INTEGER ::= 186
id-Successful-RL-InformationResponseItem	INTEGER ::= 187
id-Successful-RL-InformationResponseList	INTEGER ::= 188
id-Successful-RL-InformationResponseList-RL-SetupFailFDD	INTEGER ::= 189
id-SynchronisationMethod	INTEGER ::= 190
id-T-Cell	INTEGER ::= 191
id-TDDChipOffset	INTEGER ::= 192

```

id-TimeSlotConfigurationItem           INTEGER ::= 193
id-TimeSlotConfigurationList          INTEGER ::= 194
id-TxTransmissionGapDistance         INTEGER ::= 195
id-TxTransmissionGapPeriod          INTEGER ::= 196
id-TxTransmitGapLength               INTEGER ::= 197
id-TxTransmitGapPositionMode         INTEGER ::= 198
id-UARFCN                           INTEGER ::= 199
id-UC-ID                            INTEGER ::= 200
id-UL-CCTrCH-Information-RL-ReconfPrepTDDItem   INTEGER ::= 201
id-UL-CCTrCH-Information-RL-ReconfReqTDDItem    INTEGER ::= 202
id-UL-CCTrCH-Information-RL-SetupReqTDDItem     INTEGER ::= 203
id-UL-CCTrCH-InformationItemIE        INTEGER ::= 204
id-UL-CCTrCH-InformationList-RL-ReconfPrepTDD    INTEGER ::= 205
id-UL-CCTrCH-InformationList-RL-ReconfReqTDD     INTEGER ::= 206
id-UL-CCTrCH-InformationList-RL-SetupReqTDD      INTEGER ::= 207
id-UL-CCTrCHInformation             INTEGER ::= 208
id-UL-CCTrCHInformationList          INTEGER ::= 209
id-UL-DPCH-Information-RL-ReconfPrepFDD        INTEGER ::= 210
id-UL-DPCH-Information-RL-ReconfPrepTDDItem     INTEGER ::= 211
id-UL-DPCH-Information-RL-SetupReqTDDItem       INTEGER ::= 212
id-UL-DPCH-InformationItem-RL-ReconfReqFDD      INTEGER ::= 213
id-UL-DPCH-InformationItem-RL-SetupReqFDD        INTEGER ::= 214
id-UL-DPCH-InformationItemIE              INTEGER ::= 215
id-USCH-Information-ResourceStatIndItem        INTEGER ::= 216
id-USCH-InformationItem                 INTEGER ::= 217
id-USCH-ListItem-CTCHsetup-Req-TDD           INTEGER ::= 218
id-Unsuccessful-RL-InformationResponse       INTEGER ::= 219
id-Unsuccessful-RL-InformationResponse-RL-SetupFailFDDItem  INTEGER ::= 220
id-Unsuccessful-RL-InformationResponseItem     INTEGER ::= 221
id-Unsuccessful-RL-InformationResponseItem-RL-SetupFailTDD  INTEGER ::= 222
id-Unsuccessful-RL-InformationResponseList      INTEGER ::= 223
id-Unsuccessful-RL-InformationResponseList-RL-SetupFailFDD  INTEGER ::= 224

```

END

## 9.4 Message transfer syntax

NBAP shall use the ASN.1 Packed Encoding Rules (PER) Aligned Variant as transfer syntax as specified in ref. [11].

[Editor's note: The dating of reference [11] needs to be verified. It has been included from the ITU-T list of recommendations in force. The dating of the reference is FFS.]

## 9.5 Timers

# 10 Handling of unknown, unforeseen and erroneous protocol data

## 10.1 General

Protocol Error cases can be divided into two classes:

- Transfer Syntax error
- Abstract Syntax error

## 10.2 Transfer Syntax Error

A Transfer Syntax Error occurs when the receiver is not able to decode the received message i.e. the transfer syntax cannot be opened. If Transfer Syntax Error occurs, the receiver should initiate Error Indication procedure with appropriate cause value for the protocol error.

## 10.3 Abstract Syntax Error

### 10.3.1 General

In the NBAP messages there is criticality information set for individual IEs and/or sequences of IEs. This criticality information instructs the receiver how to act when receiving an IE that is not comprehended. An IE shall be regarded as not comprehended if the receiving node either cannot decode the IE or does not comprehend the function represented by the IE value. The case of the not comprehended IE is an Abstract Syntax Error.

If an Abstract Syntax Error occurs, the receiver shall read the remaining message and shall then for each detected Abstract Syntax Error act according to the Criticality Information for the IE or sequences of IEs due to which Abstract Syntax Error occurred in accordance with chapter 10.3.2.

The receiving node shall take different actions depending on the value of the Criticality Information. The three possible values of the Criticality Information are:

- Reject IE
- Ignore IE and Notify Sender
- Ignore IE

### 10.3.2 Handling of the Criticality Information at Reception

#### 10.3.2.1 Procedure Code

The receiving node shall treat the different types of criticality information of the *Procedure Code* according to the following:

**Reject IE:**

- If a message is received with a *Procedure Code* marked with "Reject IE" which the receiving node does not comprehend, the receiving node shall reject the procedure using the Error Indication procedure.

**Ignore IE and Notify Sender:**

- If a message is received with a *Procedure Code* marked with "Ignore IE and Notify Sender" which the receiving node does not comprehend, the receiving node shall ignore the procedure and initiate the Error Indication procedure.

**Ignore IE:**

- If a message is received with a *Procedure Code* marked with "Ignore IE" which the receiving node does not comprehend, the receiving node shall ignore the procedure.

**10.3.2.2 IEs other than the Procedure Code**

The receiving node shall treat the different types of criticality information of an IE other than the *Procedure Code* according to the following:

**Reject IE:**

- If a message *initiating* a procedure is received containing one or more IEs marked with "Reject IE" which the receiving node does not comprehend; none of the functional requests of the message shall be executed. The receiving node shall reject the procedure and report the rejection of one or more IEs using the message normally used to report unsuccessful outcome of the procedure.
- If a message *initiating* a procedure that does not have a message to report unsuccessful outcome is received containing one or more IEs marked with "Reject IE" which the receiving node does not comprehend, the receiving node shall initiate the Error Indication procedure.
- If a *response* message is received containing one or more IEs marked with "Reject IE", the receiving node shall initiate local error handling.

**Ignore IE and Notify Sender:**

- If a message *initiating* a procedure is received containing one or more IEs marked with "Ignore IE and Notify Sender" which the receiving node does not comprehend, the receiving node shall continue with the procedure using the understood IEs and report that one or more IEs have been ignored in the response message of the procedure.
- If a *response* message is received containing one or more IEs marked with "Ignore IE and Notify Sender" which the receiving node does not comprehend, the receiving node shall ignore the IE and initiate the Error Indication procedure.

**Ignore IE:**

- If a message *initiating* a procedure is received containing one or more IEs marked with "Ignore IE" which the receiving node does not comprehend, the receiving node shall continue with the procedure using the understood IEs.

**10.4 Logical Error Handling**

Logical error situations occur when a message is comprehended correctly, but the information contained within the message is not valid (i.e. semantic error), or describes a procedure which is not compatible with the state of the receiver. In these conditions, the following behaviour shall be performed as defined by the class of the elementary procedure, irrespective of the criticality of the IE's containing the erroneous values.

**Class 1:**

Where the logical error occurs in a request message of a class 1 procedure, and the procedure has a failure message, the failure message shall be sent with an appropriate cause value.

Typical cause values are:

- Protocol Causes:
  1. Semantic Error
  2. Message not compatible with receiver state

Where the logical error is contained in a request message of a class 1 procedure, and the procedure does not have a failure message, the ERROR INDICATION procedure shall be initiated with an appropriate cause value.

Where the logical error exists in a response message of a class 1 procedure, local error handling shall be initiated.

#### **Class 2:**

Where the logical error occurs in a message of a class 2 procedure, the ERROR INDICATION procedure shall be initiated with an appropriate cause value.

#### **Class 3:**

Where the logical error occurs in a request message of a class 3 procedure, and the procedure has a failure message, the failure message shall be sent with an appropriate cause value. Typical cause values are:

1. Semantic Error
2. Message not compatible with receiver state

Where the logical error is contained in a request message of a class 3 procedure, and the procedure does not have a failure message, the ERROR INDICATION procedure shall be initiated with an appropriate cause value.

Where the logical error exists in a response message of a class 3 procedure, local error handling shall be initiated.

---

## Annex A (informative): Change history

Change history					
TSG RAN#	Version	CR	Tdoc RAN	New Version	Subject/Comment
RAN_06	-	-	RP-99764	3.0.0	Approved at TSG RAN #6 and placed under Change Control

Rapporteur for TS25.433 is:

Nobutaka Ishikawa  
NTT DoCoMo

Tel.: +81 468 40 3220  
Fax : +81 468 40 3840  
Email : [nobu@wsp.yrp.nttdocomo.co.jp](mailto:nobu@wsp.yrp.nttdocomo.co.jp)

---

## History

<b>Document history</b>		
V3.0.0	January 2000	Publication