

ETSI TS 126 131 V17.3.0 (2023-01)



**Universal Mobile Telecommunications System (UMTS);
LTE;
5G;
Terminal acoustic characteristics for telephony;
Requirements
(3GPP TS 26.131 version 17.3.0 Release 17)**



Reference

RTS/TSGS-0426131vh30

Keywords

5G,LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2023.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	8
Introduction	8
1 Scope	9
2 References	9
3 Definitions, symbols and abbreviations	10
3.1 Definitions	10
3.2 Abbreviations	10
4 Interface definition	11
4.1 General	11
4.4 Electrical interfaces	12
5 Narrowband telephony transmission performance.....	12
5.1 Applicability.....	12
5.2 Overall loss/loudness ratings.....	12
5.2.1 General.....	12
5.2.2 Connections with handset UE.....	13
5.2.2a Connections with handset UE in the presence of background noise.....	13
5.2.3 Connections with desktop and vehicle-mounted hands-free UE.....	13
5.2.4 Connections with hand-held hands-free UE	13
5.2.5 Connections with headset UE	14
5.2.5a Connections with headset UE in the presence of background noise.....	14
5.2.6 Connections with electrical interface UE.....	14
5.2.6.1 Analogue connection.....	14
5.2.6.2 Digital connection	14
5.3 Idle channel noise (handset, headset UE, , and electrical interface UE).....	15
5.3.1 Sending (handset and headset UE)	15
5.3.2 Receiving (handset and headset UE)	15
5.3.3 Sending (electrical interface UE).....	15
5.3.4 Receiving (electrical interface UE).....	15
5.4 Sensitivity/frequency characteristics	16
5.4.1 Handset and headset UE sending	16
5.4.2 Handset and headset UE receiving	17
5.4.3 Desktop and vehicle-mounted hands-free UE sending	17
5.4.4 Desktop and vehicle-mounted hands-free UE receiving.....	18
5.4.5 Hand-held hands-free UE sending	19
5.4.6 Hand-held hands-free UE receiving.....	20
5.5 Sidetone characteristics (handset, headset, and analogue electrical interface UE).....	23
5.5.1 Sidetone loss	23
5.5.2 Sidetone delay.....	24
5.6 Stability loss	24
5.7 Echo Control	24
5.7.1 General.....	24
5.7.2 Acoustic echo control in desktop and vehicle-mounted hands-free UE	24
5.7.3 Acoustic echo control in hand-held hands-free UE	25
5.7.4 Acoustic echo control in a handset UE	25
5.7.5 Acoustic echo control in a headset UE	25
5.7.6 Echo control in an electrical interface UE	25
5.8 Distortion.....	26
5.8.1 Sending distortion (excluding electrical interface UE).....	26
5.8.2 Receiving (excluding electrical interface UE)	26

5.8.3	Sending distortion (electrical interface UE).....	27
5.8.4	Receiving distortion (electrical interface UE).....	28
5.9	Void.....	29
5.10	Information on other parameters (not normative)	29
5.11	Sending performance in the presence of ambient noise	29
5.11.1	General.....	29
5.11.2	Connections with handset UE.....	29
5.11.3	Connections with Handheld hands-free UE.....	29
5.11.4	Connections with electrical interface UE.....	29
5.12	Delay	30
5.12.0	UE delay definition.....	30
5.12.0.1	Acoustic interfaces.....	30
5.12.0.2	Electrical interfaces.....	30
5.12.1	Handset UE.....	31
5.12.2	Headset UE.....	32
5.12.2.1	Wired headset.....	32
5.12.2.2	Wireless headset.....	33
5.12.3	Electrical interface UE.....	33
5.13	Echo control characteristics.....	34
5.13.1	Handset	35
5.13.2	Headset	35
5.13.3	Handheld hands-free	35
5.13.4	Desktop and vehicle mounted hands-free	36
5.13.5	Electrical interface	36
5.14	Clock accuracy	36
5.15	Jitter buffer management behaviour	36
6	Wideband telephony transmission performance	36
6.1	Applicability.....	36
6.2	Overall loss/loudness ratings.....	36
6.2.1	General.....	36
6.2.2	Connections with handset UE.....	37
6.2.2a	Connections with handset UE in the presence of background noise.....	37
6.2.3	Connections with desktop and vehicle-mounted hands-free UE.....	37
6.2.4	Connections with hand-held hands-free UE	37
6.2.5	Connections with headset UE	38
6.2.5a	Connections with headset UE in the presence of background noise.....	38
6.2.6	Connections with electrical interface UE.....	38
6.2.6.1	Analogue connection.....	38
6.2.6.2	Digital connection	38
6.3	Idle channel noise (handset, headset UE, and electrical interface UE).....	39
6.3.1	Sending (handset and headset UE)	39
6.3.2	Receiving (handset and headset UE)	39
6.3.3	Sending (electrical interface UE).....	39
6.3.4	Receiving (electrical interface UE).....	39
6.4	Sensitivity/frequency characteristics	40
6.4.1	Handset and headset UE sending	40
6.4.2	Handset and headset UE receiving	41
6.4.3	Desktop and vehicle-mounted hands-free UE sending	42
6.4.4	Desktop and vehicle-mounted hands-free UE receiving.....	43
6.4.5	Hand-held hands-free UE sending	45
6.4.6	Hand-held hands-free UE receiving.....	45
6.5	Sidetone characteristics (handset, headset, and analogue electrical interface UE).....	49
6.5.1	Sidetone loss	49
6.5.2	Sidetone delay.....	50
6.6	Stability loss	50
6.7	Echo control	50
6.7.1	General.....	50
6.7.2	Acoustic echo control in desktop and vehicle-mounted hands-free UE	50
6.7.3	Acoustic echo control in hand-held hands-free UE	51
6.7.4	Acoustic echo control in a handset UE.....	51
6.7.5	Acoustic echo control in a headset UE	51

6.7.6	Echo control in an electrical interface UE	52
6.8	Distortion.....	52
6.8.1	Sending distortion (excluding electrical interface UE)	52
6.8.2	Receiving (excluding electrical interface UE)	53
6.8.3	Sending distortion (electrical interface UE).....	53
6.8.4	Receiving distortion (electrical interface UE).....	54
6.9	Void.....	55
6.10	Sending performance in the presence of ambient noise	55
6.10.1	General.....	55
6.10.2	Connections with handset UE.....	55
6.10.3	Connections with Handheld hands-free UE.....	56
6.10.4	Connections with electrical interface UE.....	56
6.11	Delay	56
6.11.0	UE delay definition.....	56
6.11.0.1	Acoustic interfaces	56
6.11.0.2	Electrical interfaces.....	57
6.11.1	Handset UE.....	57
6.11.2	Headset UE	58
6.11.2.1	Wired headset.....	58
6.11.2.2	Wireless headset.....	59
6.11.3	Electrical interface UE.....	59
6.12	Echo control characteristics.....	60
6.12.1	Handset	61
6.12.2	Headset	61
6.12.3	Handheld hands-free	61
6.12.4	Desktop and vehicle mounted hands-free	62
6.12.5	Electrical interface	62
6.13	Clock accuracy	62
6.14	Jitter buffer management behaviour	62
7	Super-wideband telephony transmission performance.....	62
7.1	Applicability.....	62
7.2	Overall loss/loudness ratings	62
7.2.1	General.....	62
7.2.2	Connections with handset UE.....	63
7.2.2a	Connections with handset UE in the presence of background noise.....	63
7.2.3	Connections with desktop and vehicle-mounted hands-free UE.....	63
7.2.4	Connections with hand-held hands-free UE	64
7.2.5	Connections with headset UE	64
7.2.5a	Connections with headset UE in the presence of background noise	64
7.2.6	Connections with electrical interface UE.....	64
7.2.6.1	Analogue connection.....	64
7.2.6.2	Digital connection	65
7.3	Idle channel noise (handset, headset UE, and electrical interface UE).....	65
7.3.1	Sending (handset and headset UE)	65
7.3.2	Receiving (handset and headset UE)	65
7.3.3	Sending (electrical interface UE).....	65
7.3.4	Receiving (electrical interface UE).....	66
7.4	Sensitivity/frequency characteristics	66
7.4.0	General.....	66
7.4.1	Handset and headset UE sending	66
7.4.2	Handset and headset UE receiving	67
7.4.2.1	Handset UE receiving	67
7.4.2.2	Headset UE receiving.....	68
7.4.3	Desktop and vehicle-mounted hands-free UE sending	69
7.4.4	Desktop and vehicle-mounted hands-free UE receiving.....	70
7.4.5	Hand-held hands-free UE sending	70
7.4.6	Hand-held hands-free UE receiving.....	71
7.4.7	Electrical interface UE sending	72
7.4.8	Electrical interface UE receiving	73
7.5	Sidetone characteristics (handset, headset, and analogue electrical interface UE).....	74
7.5.1	Sidetone loss	74

7.5.2	Sidetone delay.....	75
7.6	Stability loss	75
7.7	Echo control	75
7.7.1	General.....	75
7.7.2	Acoustic echo control in desktop and vehicle-mounted hands-free UE	75
7.7.3	Acoustic echo control in hand-held hands-free UE	76
7.7.4	Acoustic echo control in a handset UE	76
7.7.5	Acoustic echo control in a headset UE	76
7.7.6	Echo control in an electrical interface UE	76
7.8	Distortion.....	77
7.8.1	Sending distortion (excluding electrical interface UE)	77
7.8.2	Receiving (excluding electrical interface UE)	77
7.8.3	Sending distortion (electrical interface UE).....	78
7.8.4	Receiving distortion (electrical interface UE).....	79
7.9	Void.....	80
7.10	Sending performance in the presence of ambient noise	80
7.10.1	General.....	80
7.10.2	Connections with handset UE.....	80
7.10.3	Connections with Handheld hands-free UE.....	80
7.10.4	Connections with electrical interface UE.....	80
7.11	Delay	81
7.11.0	UE delay definition	81
7.11.0.1	Acoustic interfaces	81
7.11.0.2	Electrical interfaces	81
7.11.1	Handset UE.....	81
7.11.2	Headset UE	83
7.11.2.1	Wired headset.....	83
7.11.2.2	Wireless headset.....	84
7.11.3	Electrical interface UE.....	85
7.12	Echo control characteristics.....	87
7.12.1	Handset	87
7.12.2	Headset	88
7.12.3	Handheld hands-free	88
7.12.4	Desktop and vehicle mounted hands-free	88
7.12.5	Electrical interface	88
7.13	Clock accuracy	88
7.14	Jitter buffer management behaviour	88
8	Fullband telephony transmission performance.....	88
8.1	Applicability.....	88
8.2	Overall loss/loudness ratings	89
8.2.1	General.....	89
8.2.2	Connections with handset UE.....	89
8.2.2a	Connections with handset UE in the presence of background noise.....	89
8.2.3	Connections with desktop and vehicle-mounted hands-free UE.....	89
8.2.4	Connections with hand-held hands-free UE	89
8.2.5	Connections with headset UE	89
8.2.5a	Connections with headset UE in the presence of background noise.....	89
8.2.6	Connections with electrical interface UE.....	89
8.3	Idle channel noise (handset, headset UE, and electrical interface UE).....	89
8.3.1	Sending (handset and headset UE)	89
8.3.2	Receiving (handset and headset UE)	90
8.3.3	Sending (electrical interface UE).....	90
8.3.4	Receiving (electrical interface UE).....	90
8.4	Sensitivity/frequency characteristics	90
8.4.0	General.....	90
8.4.1	Handset and headset UE sending	90
8.4.2	Handset and headset UE receiving	90
8.4.2.1	Handset UE receiving	90
8.4.2.2	Headset UE receiving.....	90
8.4.3	Desktop and vehicle-mounted hands-free UE sending	90
8.4.4	Desktop and vehicle-mounted hands-free UE receiving.....	90

8.4.5	Hand-held hands-free UE sending	91
8.4.6	Hand-held hands-free UE receiving.....	91
8.4.7	Electrical interface UE sending	91
8.4.8	Electrical interface UE receiving	91
8.5	Sidetone characteristics (handset, headset, and analogue electrical interface UE).....	91
8.5.1	Sidetone loss	91
8.5.2	Sidetone delay.....	91
8.6	Stability loss	91
8.7	Echo control	91
8.7.1	General.....	91
8.7.2	Acoustic echo control in desktop and vehicle-mounted hands-free UE	91
8.7.3	Acoustic echo control in hand-held hands-free UE	92
8.7.4	Acoustic echo control in a handset UE	92
8.7.5	Acoustic echo control in a headset UE	92
8.7.6	Echo control in an electrical interface UE	92
8.8	Distortion.....	92
8.8.1	Sending distortion (excluding electrical interface UE).....	92
8.8.2	Receiving (excluding electrical interface UE)	92
8.8.3	Sending distortion (electrical interface UE).....	92
8.8.4	Receiving distortion (electrical interface UE).....	92
8.9	Void.....	92
8.10	Sending performance in the presence of ambient noise	93
8.10.1	General.....	93
8.10.2	Connections with handset UE.....	93
8.10.3	Connections with Handheld hands-free UE.....	93
8.10.4	Connections with electrical interface UE.....	93
8.11	Delay	93
8.11.0	UE delay definition.....	93
8.11.0.1	Acoustic interfaces	93
8.11.0.2	Electrical interfaces	93
8.11.1	Handset UE.....	94
8.11.2	Headset UE	95
8.11.2.1	Wired headset.....	95
8.11.2.2	Wireless headset.....	95
8.11.3	Electrical interface UE.....	96
8.12	Echo control characteristics.....	97
8.12.1	Handset	97
8.12.2	Headset	97
8.12.3	Handheld hands-free	97
8.12.4	Desktop and vehicle mounted hands-free	97
8.12.5	Electrical interface	97
8.13	Clock accuracy	97
8.14	Jitter buffer management behaviour	98
Annex A (informative): Change history		99
History		102

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

The present document specifies minimum performance requirements for the electro-acoustic characteristics of 3G, LTE, NR and WLAN terminals when used to provide narrowband, wideband, super-wideband or fullband telephony.

The objective for narrowband services is to reach a quality as close as possible to ITU-T standards for PSTN circuits. However, due to technical and economic factors, there cannot be full compliance with the general characteristics of international telephone connections and circuits recommended by the ITU-T.

The performance requirements are specified in the main body of the text; the test methods and considerations are described in TS 26.132.

1 Scope

The present document is applicable to any terminal capable of supporting narrowband, wideband, super-wideband or fullband telephony, either as a stand-alone service or as the telephony component of a multimedia service. The present document specifies minimum performance requirements for the electro-acoustic characteristics of 3G, LTE, NR and WLAN terminals when used to provide narrowband, wideband, super-wideband or fullband telephony.

The set of minimum performance requirements enables a guaranteed level of speech quality while taking possible physical limits of the terminal design into account. Some performance objectives are also defined, if such design limits can be overcome. Care must be taken in applying performance objectives in isolation, not to degrade overall end-user speech quality.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 26.132: "Speech and video telephony terminal acoustic test specification".
- [2] ITU-T Recommendation B.12 (1988): "Use of the decibel and the neper in telecommunications"
- [3] ITU-T Recommendation G.103 (1998): "Hypothetical reference connections".
- [4] ITU-T Recommendation G.111 (1993): "Loudness ratings (LRs) in an international connection".
- [5] ITU-T Recommendation G.121 (1993): "Loudness ratings (LRs) of national systems".
- [6] ITU-T Recommendation G.122 (1993): "Influence of national systems on stability and talker echo in international connections".
- [7] Void
- [8] ITU-T Recommendation P.11 (1993): "Effect of transmission impairments".
- [9] ITU-T Recommendation P.380 (2003): "Electro-acoustic measurements on headsets".
- [10] ITU-T Recommendation P.50 (1993): "Artificial voices".
- [11] ITU-T Recommendation P.79 (11/07) with Annex G (2001): "Calculation of loudness ratings for telephone sets".
- [12] ITU-T Recommendation G.223 (11/88): "Assumptions for the calculation of noise on hypothetical reference circuits for telephony".
- [13] ITU-T Recommendation P.340 (05/00): "Transmission characteristics and speech quality parameters of hands-free terminals".
- [14] ITU-T Recommendation P.501 (01/12): "Test signals for use in telephonometry".
- [15] ITU-T Recommendation P.502 (05/00): "Objective test methods for speech communication systems using complex test signals".

- [16] 3GPP TS 06.77 (R99): "Minimum Performance Requirements for Noise Suppressor Application to the AMR Speech Encoder".
- [17] 3GPP TS 26.114: "IP Multimedia Subsystem (IMS); Multimedia Telephony; Media handling and interaction".
- [18] 3GPP TS 23.203: "Policy and charging control architecture".
- [19] 3GPP TS 23.402: "Architecture enhancements for non-3GPP accesses".
- [20] 3GPP TS 24.302: "Access to the 3GPP Evolved Packet Core (EPC) via non-3GPP access networks; Stage 3".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document the terms *narrowband*, *wideband*, *super-wideband* and *fullband* refer to signals associated with the corresponding operating modes of the speech codecs specified in TS 26.132.

For the purposes of the present document, the terms dB, dBr, dBm0, dBm0p and dBA, shall be interpreted as defined in ITU-T Recommendation B.12 [2]; the term dBPa shall be interpreted as the sound pressure level relative to 1 pascal expressed in dB (0 dBPa is equivalent to 94 dB SPL).

The overload point (maximum load capacity) is for the purposes of this document defined as the RMS level of a digital representation of a full-scale pure tone at the input of the speech encoder. The overload point is defined at 3,14 dBm0 for AMR, AMR-WB and EVS speech codecs.

A 3GPP softphone is a telephony system running on a general purpose computer or PDA complying with the 3GPP terminal acoustic requirements (TS 26.131 and 26.132).

For the purposes of the present document the term *clock skew* is defined as the difference between the clock of the device under test (C_{DUT}) and the clock of the reference client (C_{REF}). The skew of C_{DUT} relative to C_{REF} is defined in parts per million (PPM) as: $(C_{DUT} - C_{REF}) \cdot 10^6 / C_{REF}$.

For the purposes of the present document, the term *electrical interface* is defined as an analogue or digital access to a UE, which allows injecting and capturing signals electrically instead of through an acoustical interface. The interface can be either analogue (wired) or digital (wired or wireless). The purpose of this interface is to connect a separate device (typically a headset), which provides a receiver and transmitter for telephony.

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

ADC	Analogue to Digital Converter
AMR	Adaptive Multi Rate
DAC	Digital to Analogue Converter
DAI	Digital Audio Interface
DRP	Eardrum Reference Point
DTX	Discontinuous Transmission
EEC	Electrical Echo Control
EL	Echo LossERP Ear Reference Point
EVS	Enhanced Voice ServicesHATS Head and Torso Simulator
G-MOS-LQO _n	Global (Overall) Mean Opinion Score - Listening Quality Objective - Narrowband
G-MOS-LQO _w	Global (Overall) Mean Opinion Score - Listening Quality Objective - Wideband
G-MOS-LQO _{fb}	Global (Overall) Mean Opinion Score - Listening Quality Objective - Fullband
IMS	IP Multimedia Subsystem
LSTR	Listener Sidetone Rating
LTE	Long Term Evolution
MRP	Mouth Reference Point

MTSI	Multimedia Telephony Service for IMSOLR Overall Loudness Rating
N-MOS-LQO _n	Noise (Background) Mean Opinion Score - Listening Quality Objective - Narrowband
N-MOS-LQO _w	Noise (Background) Mean Opinion Score - Listening Quality Objective - Wideband
N-MOS-LQO _{fb}	Noise (Background) Mean Opinion Score - Listening Quality Objective - Fullband
NR	New Radio
PCM	Pulse Code Modulation
PDA	Personal Digital Assistant
POI	Point of Interconnection (with PSTN)
PSTN	Public Switched Telephone Network
RRL	Receive Loudness Rating
S-MOS-LQO _n	Speech Signal Quality Mean Opinion Score - Listening Quality Objective - Narrowband
S-MOS-LQO _w	Speech Signal Quality Mean Opinion Score - Listening Quality Objective - Wideband
S-MOS-LQO _{fb}	Speech Signal Quality Mean Opinion Score - Listening Quality Objective - Fullband
SLR	Send Loudness Rating
STMR	Sidetone Masking Rating
SS	System Simulator
TX	Transmission
UE	User Equipment
UMTS	Universal Mobile Telecommunications System
UPCFI	13-bit Uniform PCM Interface
WLAN	Wireless Local Area Network

4 Interface definition

4.1 General

The interfaces required to define terminal electro-acoustic characteristics are shown in TS 26.132. These are the air interface and the point of interconnect (POI). The interfaces are shown for one-channel (mono) operation, interfaces for two-channel (stereo) operation is for further study.

Measurements can be made using the system simulator (SS) described in TS 26.132. MTSI speech aspects are specified by TS 26.114 [17].

4.2 Air interfaces

The Air Interfaces for GSM, 3G, LTE and NR are specified by GSM 05, 3GPP 45, 3GPP 25, 3GPP 36 and 3GPP 38 series specifications, and the Air Interface for WLAN access to EPC is specified by WLAN access to EPC as defined in TS 23.402 [19] and TS 24.302 [20].

The POI with the public switched telephone network (PSTN) is considered to have a relative level of 0 dB.

4.3 Acoustical interfaces

Five classes of acoustical interface are considered in this specification:

- Handset UE including softphone UE used as a handset;
- Headset UE including softphone UE used with headset;
- Desktop-mounted hands-free UE including softphone UE with external loudspeaker(s) used in hands-free mode;
- Vehicle-mounted hands-free UE including softphone UE mounted in a vehicle;
- Hand-held hands-free UE including softphone UE with internal loudspeaker(s) used in hands-free mode.

(See definition of softphone in Clause 3.1)

NOTE: The requirements and performance objectives for a softphone UE shall be derived according to the following rules:

- When using a softphone UE as a handset: requirements and performance objectives shall correspond to handset mode.
- When using a softphone UE with headset: requirements and performance objectives shall correspond to headset mode.
- When a softphone UE is mounted in a vehicle: requirements and performance objectives shall correspond to vehicle-mounted handsfree mode.
- When using a softphone UE in hands-free mode:
 - When using internal loudspeaker(s), requirements and performance objectives shall correspond to hand-held hands-free.
 - When using external loudspeaker(s), requirements and performance objectives shall correspond to desktop-mounted hands-free.

4.4 Electrical interfaces

An electrical interface is considered in this specification and details on standardized analogue (wired) and digital (wired and wireless) headset interfaces can be found in TS 26.132. For the electrical interface, the POI in sending / receiving direction is respectively defined as the input / output of the reference speech coder of the system simulator.

Any of the UE types mentioned in clause 4.3 providing an electrical interface can be considered as Electrical Interface UE.

5 Narrowband telephony transmission performance

5.1 Applicability

The performance requirements in this sub-clause shall apply when UE is used to provide narrowband telephony, either as a stand-alone service, or as part of a multimedia service.

5.2 Overall loss/loudness ratings

5.2.1 General

An international connection involving a 3G, LTE, NR or WLAN network and the PSTN should meet the overall loudness rating (OLR) limits in ITU-T Recommendation G.111 [4]. The national parts of the connection should therefore meet the send and receive loudness rating (SLR, RLR) limits in ITU-T Recommendation G.121 [5].

For the case where digital routings are used to connect the 3G, LTE, NR or WLAN network to the international chain of circuits, the SLR and RLR of the national extension will be largely determined by the SLR and RLR of the 3G, LTE, NR or WLAN network. The limits given below are consistent with the national extension limits and long term objectives in ITU-T Recommendation G.121 [5].

The SLR and RLR values for the 3G, LTE, NR or WLAN network apply up to the POI. However, the main determining factors are the characteristics of the UE, including the analogue to digital conversion (ADC) and digital to analogue conversion (DAC). In practice, it is convenient to specify loudness ratings to the Air Interface. For the normal case, where the 3G, LTE, NR or WLAN network introduces no additional loss between the Air Interface and the POI, the loudness ratings to the PSTN boundary (POI) will be the same as the loudness ratings measured at the Air Interface. However, in some cases loss adjustment may be needed for interworking situations in individual countries.

5.2.2 Connections with handset UE

The nominal values of SLR/RLR to the POI shall be:

$$\text{SLR} = 8 \pm 3 \text{ dB};$$

$$\text{RLR} = 2 \pm 3 \text{ dB}.$$

Where a user-controlled receiving volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. When the control is set to maximum, the RLR shall not be \leq (equal or louder than) -13 dB.

With the volume control set to the minimum position the RLR shall not be \geq (equal or quieter than) 18 dB.

Compliance shall be checked by the relevant tests described in TS 26.132.

5.2.2a Connections with handset UE in the presence of background noise

In the presence of background noise, the RLR at maximum volume control shall not be \leq (equal or louder than) -13 dB.

Compliance shall be checked by the relevant tests described in TS 26.132.

5.2.3 Connections with desktop and vehicle-mounted hands-free UE

The nominal values of SLR/RLR to/from the POI shall be:

$$\text{SLR} = 13 \pm 4 \text{ dB};$$

$$\text{RLR} = 2 \pm 4 \text{ dB (for vehicle-mounted hands-free UE);}$$

$$\text{RLR} = 5 \pm 4 \text{ dB (for desktop hands-free UE).}$$

1. For a vehicle-mounted hands-free UE:

Where a user-controlled volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. It is recommended that a volume control giving at least 15 dB increase from the nominal RLR (louder) is provided for hands-free units intended to work in the vehicle environment. This is to allow for the increased acoustic noise level in a moving vehicle.

RLR at the maximum volume control setting should be \leq (equal or louder than) -2 dB.

2. For a desktop hands-free UE:

Where a user-controlled volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. It is recommended that a volume control giving at least 15 dB increase from the nominal RLR (louder) is provided for hands-free units. This is to allow for the increased acoustic noise level in the usage environment.

RLR at the maximum volume control setting should be \leq (equal or louder than) 1 dB.

Compliance shall be checked by the relevant tests described in TS 26.132.

NOTE: The target value for nominal RLR, as recommended in ITU-T G.111 Annex B – Table B.1 [4], lies between 1 and 3 dB. The higher RLR requirement of 5 dB for desktop hands-free is appreciative of the limitations in transducer output with current typical form factors.

5.2.4 Connections with hand-held hands-free UE

The nominal values of SLR/RLR to/from the POI shall be:

$$\text{SLR} = 13 \pm 4 \text{ dB};$$

$$\text{RLR} = 9 +9 / -7 \text{ dB}.$$

As a performance objective it is recommended that the RLR at the maximum volume control setting is \leq (equal or louder than) 2 dB.

Where a user-controlled volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. It is recommended that a volume control range ≥ 15 dB be provided. Compliance shall be checked by the relevant tests described in TS 26.132.

NOTE: The target value for nominal RLR, as recommended in ITU-T G.111 Annex B – Table B.1 [4], lies between 1 and 3 dB. The higher RLR requirement of 9 dB for hand-held hands-free is appreciative of the limitations in transducer output with typical form factors.

5.2.5 Connections with headset UE

The nominal values of SLR/RLR to/from the POI shall be:

$$\text{SLR} = 8 \pm 3 \text{ dB};$$

$$\text{RLR} = 2 \pm 3 \text{ dB};$$

$$\text{RLR (binaural headset)} = 8 \pm 3 \text{ dB for each earphone.}$$

Where a user-controlled receiving volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. When the control is set to maximum, the RLR shall not be \leq (equal or louder than) -13 dB.

With the volume control set to the minimum position the RLR shall not be \geq (equal or quieter than) 18 dB and shall not be \geq (equal or quieter than) 24 dB for a binaural headset.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

5.2.5a Connections with headset UE in the presence of background noise

In the presence of background noise, the RLR at maximum volume control shall not be \leq (equal or louder than) -13 dB.

Compliance shall be checked by the relevant tests described in TS 26.132.

5.2.6 Connections with electrical interface UE

5.2.6.1 Analogue connection

The nominal values of SJLR/RJLR to/from the POI shall be:

$$\text{SJLR} = 0 \pm 3 \text{ dB};$$

$$\text{RJLR} = 0 \pm 3 \text{ dB};$$

Where a user-controlled receiving volume control is provided, the RJLR shall meet the nominal value for at least one setting of the control. When the control is set to maximum, the RJLR shall not be \leq (equal or louder than) -15 dB.

With the volume control set to the minimum position the RJLR shall not be \geq (equal or quieter than) 16 dB.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

5.2.6.2 Digital connection

The nominal values of SJLR/RJLR to/from the POI shall be:

$$\text{SJLR} = 0 \pm 3 \text{ dB};$$

$$\text{RJLR} = 0 \pm 3 \text{ dB};$$

Requirements with different volume settings (other than nominal) are not applicable.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

5.3 Idle channel noise (handset, headset UE, , and electrical interface UE)

5.3.1 Sending (handset and headset UE)

The maximum noise level produced by the apparatus at the output of the SS under silent conditions in the sending direction shall be ≤ -64 dBm_{0p}.

NOTE 1: This level includes the eventual noise contribution of an acoustic echo canceller under the condition that no signal is received.

NOTE 2: This figure applies to the total noise level with psophometric weighting. It is recommended that the level of single frequency disturbances should be ≤ -74 dBm_{0p} in the frequency range from 300 Hz to 3.4 kHz.

Compliance shall be checked by the relevant test described in TS 26.132.

5.3.2 Receiving (handset and headset UE)

The maximum (acoustic) A-weighted noise level at the handset and headset UE when no signal is applied to the input of the SS shall be as follows:

If no user-controlled receiving volume control is provided, or, if it is provided, at the setting of the user-controlled receiving volume control at which the RLR is equal to the nominal value, the noise measured at the DRP with diffuse-field correction contributed by the receiving equipment alone shall be ≤ -57 dBPa(A).

Where a volume control is provided, the measured noise shall be ≤ -54 dBPa(A) at the maximum setting of the volume control.

For the nominal volume control setting, the level of single frequency disturbances should be ≤ -60 dBPa(A) in the frequency range from 100 Hz to 10 kHz. As a performance objective it is recommended that the level should be ≤ -64 dBPa(A).

NOTE: In a connection with the PSTN, noise conditions as described in ITU-T Recommendation G.103 [3] can be expected at the input (POI) of the 3G, LTE, NR or WLAN network. The characteristics of this noise may be influenced by the speech transcoding process (for further study).

Compliance shall be checked by the relevant test described in 3GPP TS 26.132.

5.3.3 Sending (electrical interface UE)

The maximum noise level produced by the apparatus at the output of the SS under silent conditions in the sending direction shall be ≤ -64 dBm_{0p}.

NOTE 1: This level includes the eventual noise contribution of an acoustic echo canceller under the condition that no signal is received.

NOTE 2: This figure applies to the total noise level with psophometric weighting. It is recommended that the level of single frequency disturbances should be ≤ -74 dBm_{0p} in the frequency range from 300 Hz to 3.4 kHz.

Compliance shall be checked by the relevant test described in TS 26.132.

5.3.4 Receiving (electrical interface UE)

The maximum A-weighted noise level when no signal is applied to the input of the SS shall be as follows:

If no user-controlled receiving volume control is provided, or, if it is provided, at the setting of the user-controlled receiving volume control at which the RJLR is equal to the nominal value, the noise measured at the receive output of the electrical reference interface contributed by the receiving equipment alone shall be ≤ -87 dBV(A) for analogue and -64 dBm₀(A) for digital connections.

Where a volume control is provided, the measured noise shall be ≤ -84 dBV(A) for analogue connection at the maximum setting of the volume control.

For the nominal volume control setting, the level of single frequency disturbances should be ≤ -90 dBV(A) for analogue and -67 dBm0(A) for digital connections in the frequency range from 100 Hz to 10 kHz. As a performance objective it is recommended that the level should be ≤ -94 dBV(A) for analogue and -71 dBm0(A) for digital connections.

NOTE: In a connection with the PSTN, noise conditions as described in ITU-T Recommendation G.103 [3] can be expected at the input (POI) of the 3G, LTE, NR or WLAN network. The characteristics of this noise may be influenced by the speech transcoding process (for further study).

Compliance shall be checked by the relevant test described in 3GPP TS 26.132.

5.4 Sensitivity/frequency characteristics

5.4.1 Handset and headset UE sending

The sensitivity/frequency characteristics shall be as follows:

The sending sensitivity frequency response, measured either from the mouth reference point (MRP) to the digital interface or from the MRP to the SS audio output (digital output of the reference speech decoder of the SS), shall be within a mask, which can be drawn between the points given in table 1. The mask is drawn with straight lines between the breaking points in table 1 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 1: Handset and headset sending sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	-12	
200	0	
300	0	-12
1 000	0	-6
2 000	4	-6
3 000	4	-6
3 400	4	-9
4 000	0	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

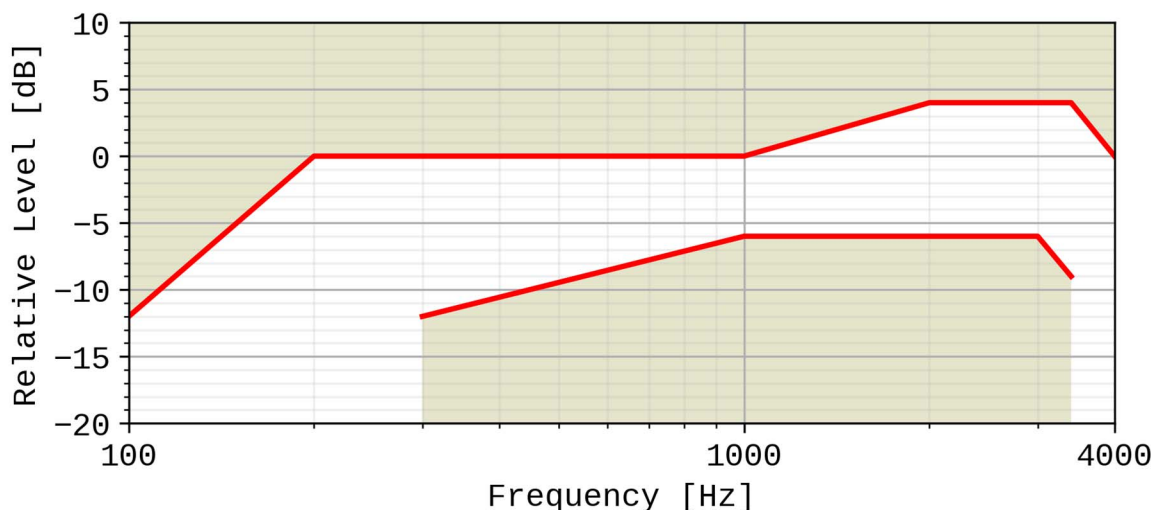


Figure 1: Handset and headset sending sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

5.4.2 Handset and headset UE receiving

The sensitivity/frequency characteristics shall be as follows:

The receiving sensitivity frequency response, measured either from the digital interface to the DRP with diffuse-field correction or from the SS audio input (analogue or digital input of the reference speech encoder of the SS) to the DRP with diffuse-field correction shall be within a mask, which can be drawn with straight lines between the breaking points in table 2 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 2: Handset and headset receiving sensitivity/frequency mask for 8N application force

Frequency (Hz)	Upper limit (dB) $8 \pm 2 N$	Lower limit (dB) $8 \pm 2 N$
100	6	
300	6	-6
3 400	6	-6
4 000	6	

NOTE 1: All sensitivity values are expressed in dB on an arbitrary scale
 NOTE 2: The basis for the target frequency responses in send and receive is the orthotelephon reference response measured between 2 subjects 1 m apart under free-field condition assumes an ideal receive characteristic. Under these conditions the overall frequency shows a rising slope. The present document no longer uses the ERP as the reference receive but the diffuse-field. With the concept of diffuse-field based receive measurement rising slope for the overall frequency response is achieved by a flat target frequency response and a flat diffuse-field based receive frequency response.

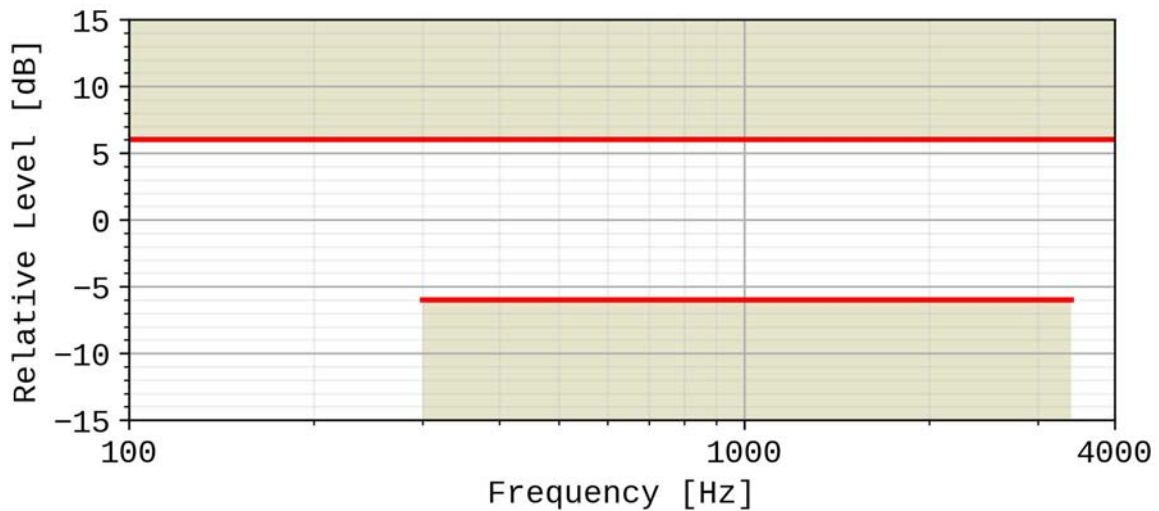


Figure 2: Handset and headset receiving sensitivity/frequency mask for 8N application force

Compliance shall be checked by the relevant test described in TS 26.132.

5.4.3 Desktop and vehicle-mounted hands-free UE sending

The sending sensitivity frequency response from the MRP to the SS audio output (digital output of the reference speech decoder of the SS) shall be as follows:

The sending sensitivity frequency response shall be within the mask which can be drawn with straight lines between the breaking points in table 3 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 3: Desktop and vehicle-mounted hands-free sending sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	-12	
200	0	
300	0	-12
1 000	0	-6
2 000	4	-6
3 000	4	-6
3 400	4	-9
4 000	0	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

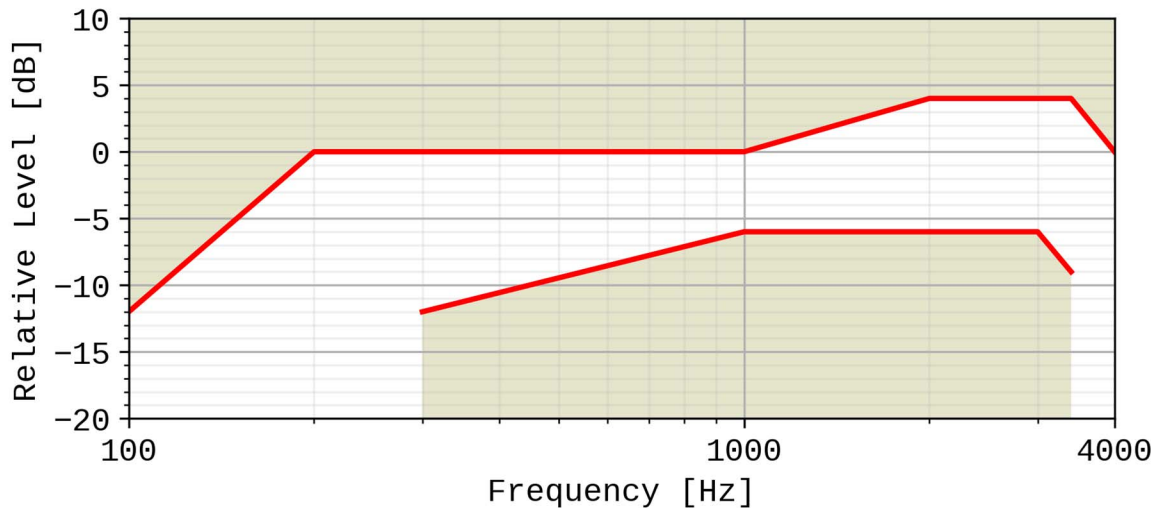


Figure 3: Desktop and vehicle-mounted hands-free sending sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

5.4.4 Desktop and vehicle-mounted hands-free UE receiving

The receiving sensitivity frequency response from the SS audio input (analogue or digital input of the reference speech encoder of the SS) to the free-field shall be as follows:

The receiving sensitivity frequency response shall be within the mask which can be drawn with straight lines between the breaking points in table 4 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 4: Desktop and vehicle-mounted hands-free receiving sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
200	6	
315	6	-9
400	6	-6
3 100	6	-6
4 000	6	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

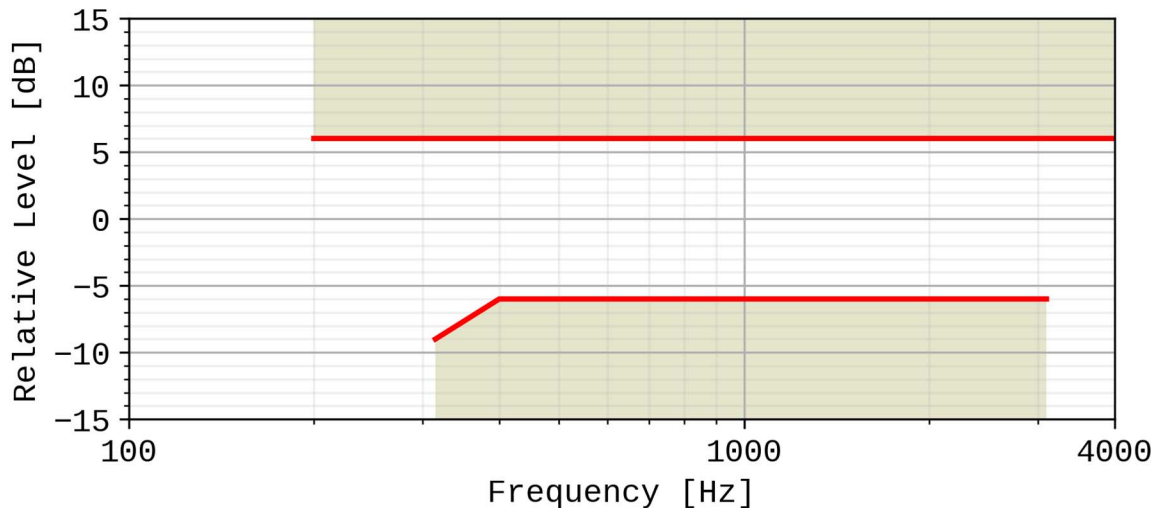


Figure 4: Desktop and vehicle-mounted receiving sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

5.4.5 Hand-held hands-free UE sending

The sending sensitivity frequency response from the MRP to the SS audio output (digital output of the reference speech decoder of the SS) shall be as follows:

The sending sensitivity frequency response shall be within the mask which can be drawn with straight lines between the breaking points in table 5 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 5: Hand-held hands-free sending sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	-12	
200	0	
300	0	-12
1 000	0	-6
2 000	4	-6
3 000	4	-6
3 400	4	-9
4 000	0	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

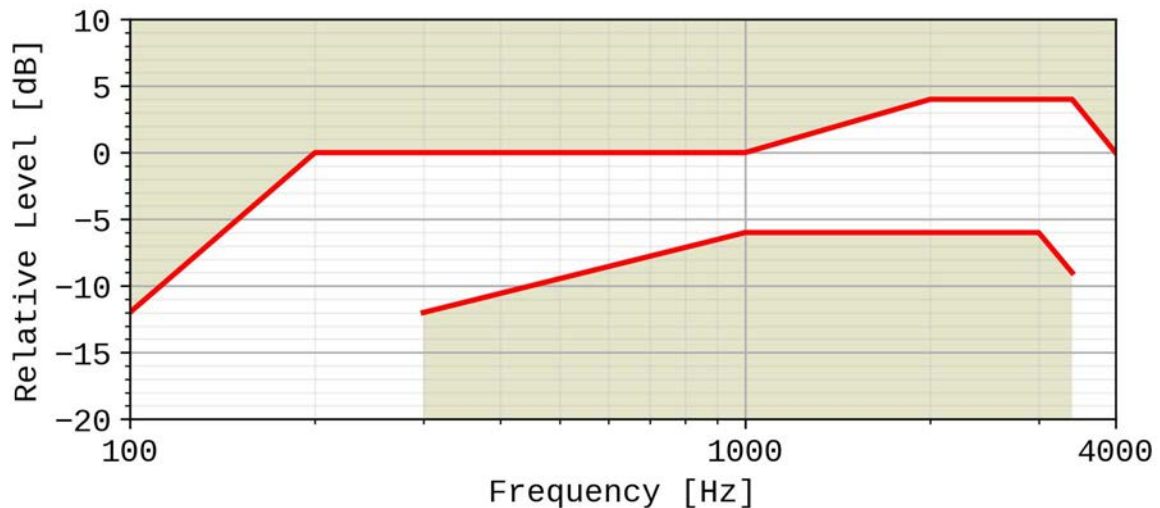


Figure 5: Hand-held hands-free sending sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

5.4.6 Hand-held hands-free UE receiving

The receiving sensitivity frequency response from the SS audio input (analogue or digital input of the reference speech encoder of the SS) to the free-field shall be as follows:

The receiving sensitivity frequency response shall be within the mask which can be drawn with straight lines between the breaking points in table 6 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 6: Hand-held hands-free receiving sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
200	6	
500	6	-9 (Note 2)
630	6	-6 (Note 2)
800	6	-6
3 100	6	-6
4 000	6	

NOTE 1: All sensitivity values are expressed in dB on an arbitrary scale.
 NOTE 2: The values stated in the Table 6 for 500 and 630 Hz are listed for performance objective purposes. (not mandatory)

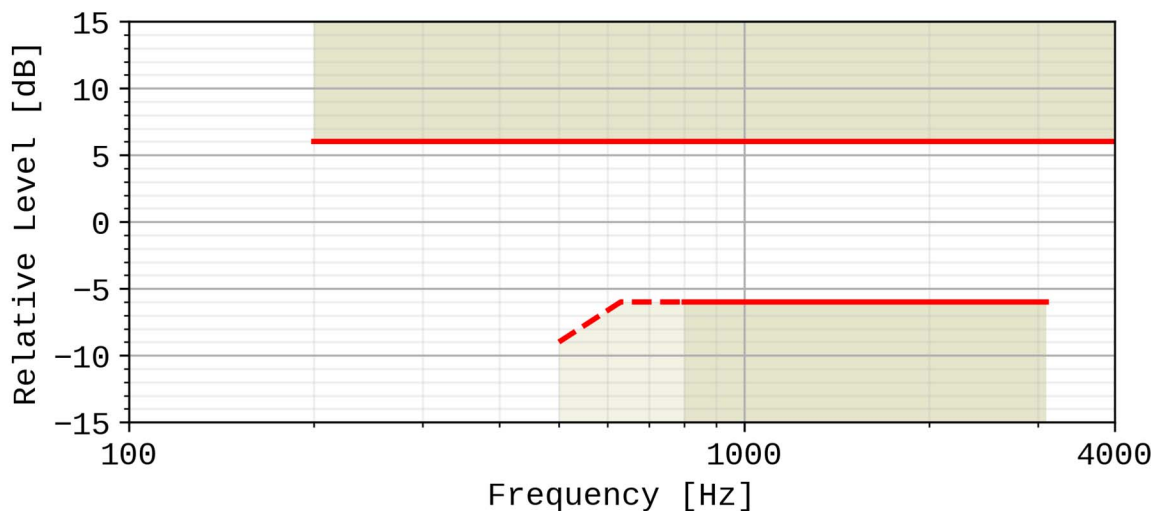


Figure 6: Hand-held hands-free receiving sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

5.4.7 Electrical interface UE sending

The sensitivity/frequency characteristics shall be as follows:

The sending sensitivity frequency response measured at the electrical reference point shall be within a mask, which can be drawn between the points given in table 6a. The mask is drawn with straight lines between the breaking points in table 6a on a logarithmic (frequency) - linear (dB sensitivity) scale.

NOTE: A tilt above 1 kHz is to compensate for the mouth to microphone acoustic path when the microphone is assumed to be hanging on a headset on the side of the head.

Table 6a: Electrical interface sending sensitivity/frequency mask

Frequency (Hz)	Upper limit	Lower limit
100	3	
200	3	
300	3	-3
1 000	5	-3
3 100		0
3 400	12	-5
4 000	12	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

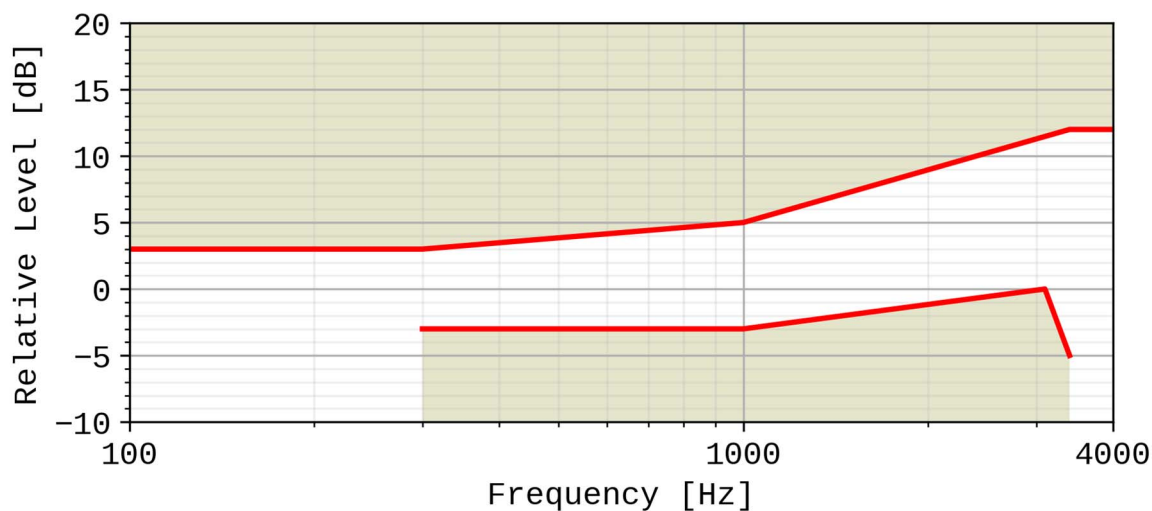


Figure 6a: Electrical interface sending sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

5.4.8 Electrical interface UE receiving

The sensitivity/frequency characteristics shall be as follows:

The receiving sensitivity frequency response measured at the output of the electrical interface UE shall be within a mask, which can be drawn with straight lines between the breaking points in table 6b on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 6b: Electrical interface receiving sensitivity/frequency mask

Frequency (Hz)	Upper limit	Lower limit
100	2	
200	2	
300	2	-6
1 000	2	-2
2 000	6	-2
3 400	6	-5
4 000	6	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

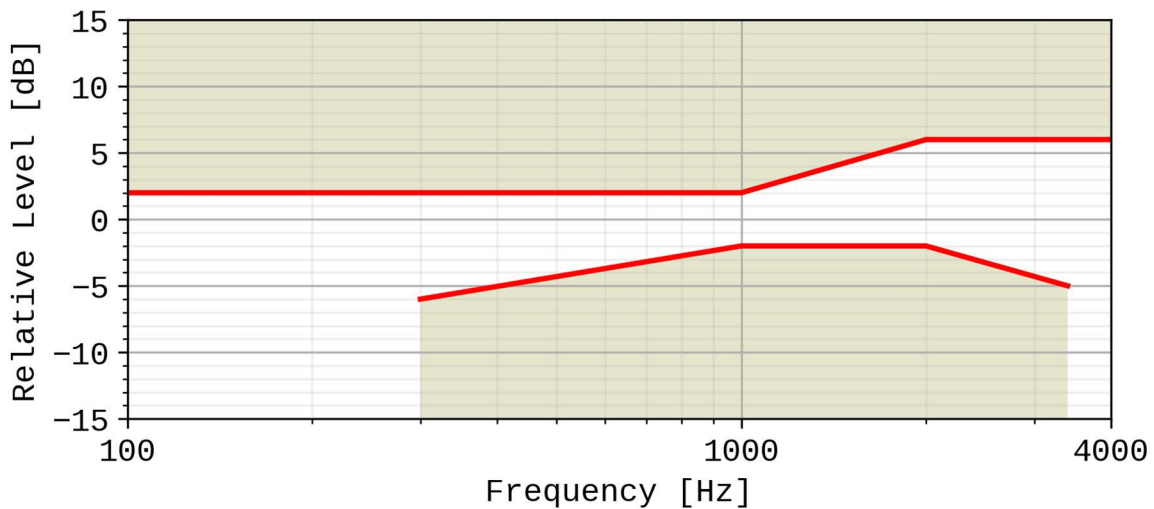


Figure 6b: Handset and headset receiving sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

5.5 Sidetone characteristics (handset, headset, and analogue electrical interface UE)

5.5.1 Sidetone loss

The talker sidetone masking rating (STMR) shall be ≥ 15 dB and should be ≤ 23 dB for the nominal setting of the volume control. For all other positions of the volume control, the STMR shall be ≥ 10 dB.

In case the STMR is below the lower limit also when the electrical sidetone path has been disabled, the result shall not be regarded as a failure.

Compliance shall be checked by the relevant test described in 3GPP TS 26.132. The bandwidth for the sidetone path provided by the UE may in some terminals not be restricted to the narrowband range. In case the sidetone path operates in a mode other than narrowband (to be declared by the manufacturer), compliance shall be checked using the test described for "Wideband telephony transmission performance".

NOTE 1: Where a user-controlled receiving volume control is provided, it is recommended that the sidetone loss is independent of the volume control setting.

NOTE 2: In general, it is recommended to provide a terminal sidetone path for handset and headset UEs.

NOTE 3: In case the human air-conducted sidetone paths are obstructed (one example being some binaural insert type headset UEs), it is important to provide a terminal sidetone path.

NOTE 4: The STMR calculation algorithm being used was developed for quantifying the audibility of the electrical sidetone path using a sealed coupler. The air-conducted path was not intended to be included in the test setup. A lower STMR limit was specified to avoid annoying effects (e.g. howling, increase of ambient noise level in the ear) of an excessive electrical sidetone. In HATS-based measurements, the air-conducted path cannot be avoided in the test setup. With some UE form factors the air-conducted path can be substantial resulting in low STMR figures also when there are no annoying effects from any excessive electrical sidetone. See ITU-T Recommendation P.76 for definitions of sidetone paths.

5.5.2 Sidetone delay

The maximum sidetone delay should be ≤ 5 ms, measured in an echo-free setup.

NOTE: The measured result is only applicable where the level of the electrical sidetone is sufficiently high to be measured. While the STMR value may indicate the presence of sidetone it should be ensured that this is not primarily due to the acoustical or mechanical sidetone path when interpreting sidetone delay results.

Compliance shall be checked by the relevant test described in TS 26.132.

5.6 Stability loss

The stability loss presented to the PSTN by the 3G, LTE, NR or WLAN network at the POI should meet the principles of the requirements in clauses 2 and 3 of ITU-T Recommendation G.122 [6]. These requirements will be met if the attenuation between the digital input and digital output at the POI is ≥ 6 dB at all frequencies in the range 200 Hz to 4 kHz under the worst case acoustic conditions at the UE (any acoustic echo control should be enabled). For the normal case of digital connection between the Air Interface and the POI, the stability requirement can be applied at the Air Interface.

The worst case acoustic conditions will be as follows (with volume control set to maximum for each following condition):

Handset UE: the handset lying on, and the transducers facing, a hard surface with the ear-piece uncapped;

Headset UE: for further study;

Hands-free UE: no requirement other than echo loss.

NOTE: The test procedure must take into account the switching effects of echo control and discontinuous transmission (DTX).

5.7 Echo Control

5.7.1 General

The echo loss (EL) presented by the 3G, LTE, NR or WLAN network at the POI should be sufficient during single-talk. This takes into account the fact that the UE is likely to be used in connections with high transmission delay and in a wide range of noise environments.

See ITU-T Recommendation G.131 for general guidance.

The use of acoustic echo control is not mandated for 3G, LTE, NR or WLAN networks and the connection between the UE and the POI is zero loss. Therefore the acoustic echo control provided in the UE should provide a sufficient TCLw at the POI over the likely range of acoustic end delays.

If acoustic echo control is provided by voice switching, comfort noise should be injected. This comfort noise shall operate in the same way as that used in DTX.

5.7.2 Acoustic echo control in desktop and vehicle-mounted hands-free UE

The TCLw for the desktop and vehicle-mounted hands-free UE shall be ≥ 40 dB for any setting of the volume control.

The TCLw for the desktop hands-free and vehicle-mounted hands-free UE shall be ≥ 46 dB when measured under free-field conditions at the nominal setting of the volume control.

NOTE: A TCLw for the desktop hands-free and vehicle-mounted hands-free UE of ≥ 55 dB is recommended as a performance objective when measured under free-field conditions at the nominal setting of the volume control. Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

The echo canceller should be designed to cope with the expected reverberation and dispersion. In the case of the hands-free UE, this reverberation and dispersion may be time variant. Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

5.7.3 Acoustic echo control in hand-held hands-free UE

The TCLw for hand-held hands-free UE shall be ≥ 40 dB for any setting of the volume control.

The TCLw for hand-held hands-free UE shall be ≥ 46 dB at the nominal setting of the volume control.

NOTE: A TCLw for the hand-held hands-free UE of ≥ 55 dB is recommended as a performance objective when measured under free-field conditions at the nominal setting of the volume control. Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

The echo canceller should be designed to cope with the expected reverberation and dispersion. In the case of the hands-free UE, this reverberation and dispersion may be time variant. Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

5.7.4 Acoustic echo control in a handset UE

The TCLw for handset UE shall be ≥ 46 dB for any setting of the volume control.

The TCLw for handset UE should be ≥ 55 dB at the nominal setting of the volume control.

NOTE: It is recommended that the volume control should be set back to nominal after each call unless TCLw ≥ 55 dB can also be maintained with the maximum volume setting. Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

The echo canceller should be capable of dealing with the variations in handset positions when in normal use. The implications of this are under study. Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

5.7.5 Acoustic echo control in a headset UE

The TCLw for headset UE shall be ≥ 46 dB for any setting of the volume control.

The TCLw for headset UE should be ≥ 55 dB at the nominal setting of the volume control.

NOTE: It is recommended that the volume control should be set back to nominal after each call unless TCLw ≥ 55 dB can also be maintained with the maximum volume setting. Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

The echo canceller should be designed to cope with the expected reverberation and dispersion.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

5.7.6 Echo control in an electrical interface UE

The TCLw for electrical interface UE shall be ≥ 46 dB for any setting of the volume control.

The TCLw for electrical interface UE should be ≥ 55 dB at the nominal setting of the volume control.

NOTE: It is recommended that the volume control should be set back to nominal after each call unless $TCL_w \geq 55$ dB can also be maintained with the maximum volume setting. Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

The echo canceller should be designed to cope with the expected reverberation and dispersion.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

5.8 Distortion

5.8.1 Sending distortion (excluding electrical interface UE)

The sending part shall meet the following distortion requirements:

NOTE 1: Digital signal processing other than the transcoder itself is included in this requirement (e.g. echo cancelling).

Distortion shall be measured between the MRP and the SS audio output (output of the reference speech decoder of the SS). The ratio of signal-to-total distortion power measured with the proper noise weighting (see table 4 of ITU-T Recommendation G.223) shall be above the limits given in table 7.

Table 7: Limits for signal-to-total distortion ratio

Sending level (dBPa at the MRP)	Sending Ratio (dB)
5	30
0	35
-4,7	35
-10	33
-15	30
-20	27

Limits for intermediate levels are found by drawing straight lines between the breaking points in table 7 on a linear (dB signal level) - linear (dB ratio) scale.

Compliance of the sending distortion shall be checked by the test described in TS 26.132.

NOTE 2: It should be ensured that the test signal is treated by speech processing algorithms as a speech-like signal, and not a noise-like signal. Test signals with a time-stationary envelope may be treated by certain algorithms, e.g., noise suppression algorithms defined in 3GPP TS 06.77 R99 [16], as a noise-like signal. If speech processing algorithms, including but not limited to noise suppression algorithms, are shown to treat the test signal as a noise-like signal, even where an activation signal has been utilized, then the test should be repeated with said speech processing algorithms disabled. The results of both sets of tests and the state of the processing algorithms should be documented in the test report.

5.8.2 Receiving (excluding electrical interface UE)

The receiving part between the SS audio input (input of the reference speech encoder of the SS) and the applicable acoustic measurement point (DRP with diffuse-field correction for handset and headset modes; free field correction for hands-free modes) shall meet the requirements in this clause at the nominal setting of the volume control:

The ratio of signal to total distortion power measured with the proper noise weighting (see table 4 of ITU-T Recommendation G.223) shall be above the limits given in table 8 when the sound pressure at the applicable acoustic measurement point is up to 10 dBPa. For a sound pressure ≥ 10 dBPa at the applicable acoustic measurement point there is no distortion requirement.

Table 8: Limits for signal-to-total distortion ratio

Frequency (Hz)	Receiving level at the digital interface (dBm0)	Receiving ratio at nominal volume setting (dB)	Receiving ratio at maximum volume setting (dB)
315	-16	20	
408	-16	28	
510	-16	28	
816	-16	28	
1 020	0	25,5	
	-3	31,2	
	-10	33,5	
	-16	33,5	
	-20	33	
	-30	30,5	
	-40 (*)	22,5 (*)	
-45 (*)	17,5 (*)		

NOTE: (*) For levels -40 and -45 dBm0 a lower signal-to-total distortion ratio may not be possible, and hence would not be regarded as a failing result. However, the obtained results would be reported.

Limits for intermediate levels are found by drawing straight lines between the breaking points in the table on a linear (dB signal level) - linear (dB ratio) scale.

Compliance of the receiving distortion shall be checked by the appropriate test method in TS 26.132.

NOTE 1: It should be ensured that the test signal is treated by speech processing algorithms as a speech-like signal, and not a noise-like signal. Test signals with a time-stationary envelope may be treated by certain algorithms, e.g. noise suppression algorithms defined in 3GPP TS 06.77 R99 [16], as a noise-like signal. If speech processing algorithms, including but not limited to noise suppression algorithms, are shown to treat the test signal as a noise-like signal, even where an activation signal has been utilized, then the test should be repeated with said speech processing algorithms disabled. The results of both sets of tests and the state of the processing algorithms should be documented in the test report.

NOTE 2: Frequencies from 315 Hz to 816 Hz do not apply to the hands-free UE case, only to handset and headset UE.

5.8.3 Sending distortion (electrical interface UE)

The sending part shall meet the following distortion requirements:

NOTE 1: Digital signal processing other than the transcoder itself is included in this requirement (e.g. echo cancelling).

Distortion shall be measured at the output of the electrical reference interface. The ratio of signal-to-total distortion power measured with the proper noise weighting (see table 4 of ITU-T Recommendation G.223) shall be above the limits given in table 8a1 for electrical interface UE with analogue connection and table 8a2 for electrical interface UE with digital connection.

Table 8a1: Limits for signal-to-total distortion ratio for analogue connection

Sending level (dBV at the output of the electrical reference interface)	Sending Ratio (dB)
-50	30
-55	35
-60	35
-65	33
-70	30
-75	27

Table 8a2: Limits for signal-to-total distortion ratio for digital connection

Sending level (dBm0 at the output of the electrical reference interface)	Sending Ratio (dB)
-6	30
-11	35
-16	35
-21	33
-26	30
-31	27

Limits for intermediate levels are found by drawing straight lines between the breaking points in tables 8a1 and 8a2 on a linear (dB signal level) - linear (dB ratio) scale.

Compliance of the sending distortion shall be checked by the test described in TS 26.132.

NOTE 2: It should be ensured that the test signal is treated by speech processing algorithms as a speech-like signal, and not a noise-like signal. Test signals with a time-stationary envelope may be treated by certain algorithms, e.g., noise suppression algorithms defined in 3GPP TS 06.77 R99 [16], as a noise-like signal. If speech processing algorithms, including but not limited to noise suppression algorithms, are shown to treat the test signal as a noise-like signal, even where an activation signal has been utilized, then the test should be repeated with said speech processing algorithms disabled. The results of both sets of tests and the state of the processing algorithms should be documented in the test report.

5.8.4 Receiving distortion (electrical interface UE)

The receiving part between the SS audio input (input of the reference speech encoder of the SS) and applicable electric measurement point (input to the electrical reference interface) shall meet the requirements in this clause at the nominal setting of the volume control:

The ratio of signal to total distortion power measured with the proper noise weighting (see table 4 of ITU-T Recommendation G.223) shall be above the limits given in table 8b.

Table 8b: Limits for signal-to-total distortion ratio

Frequency (Hz)	Receiving level at the digital interface (dBm0)	Receiving ratio at nominal volume setting (dB)	Receiving ratio at maximum volume setting (dB)
315	-16	20	
408	-16	28	
510	-16	28	
816	-16	28	
1 020	0	25,5	
	-3	31,2	
	-10	33,5	
	-16	33,5	
	-20	33	
	-30	30,5	
	-40 (*)	22,5 (*)	
-45 (*)	17,5 (*)		

NOTE: (*) For levels -40 and -45 dBm0 a lower signal-to-total distortion ratio may not be possible, and hence would not be regarded as a failing result. However, the obtained results would be reported.

Limits for intermediate levels are found by drawing straight lines between the breaking points in the table 8b on a linear (dB signal level) - linear (dB ratio) scale.

Compliance of the receiving distortion shall be checked by the appropriate test method in TS 26.132.

NOTE: It should be ensured that the test signal is treated by speech processing algorithms as a speech-like signal, and not a noise-like signal. Test signals with a time-stationary envelope may be treated by certain algorithms, e.g. noise suppression algorithms defined in 3GPP TS 06.77 R99 [16], as a noise-like signal. If speech processing algorithms,

including but not limited to noise suppression algorithms, are shown to treat the test signal as a noise-like signal, even where an activation signal has been utilized, then the test should be repeated with said speech processing algorithms disabled. The results of both sets of tests and the state of the processing algorithms should be documented in the test report.

5.9 Void

5.10 Information on other parameters (not normative)

Information about additional parameters relevant to speech quality, e.g., for terminals where signal processing is used, can be found in ITU-T Recommendations P.340, P.501 and P.502.

5.11 Sending performance in the presence of ambient noise

5.11.1 General

For sending, in handset mode, the UE shall reduce the ambient noise picked up by the microphone(s) without significantly degrading the quality of the speech signal.

5.11.2 Connections with handset UE

The UE shall comply with the following requirements:

S-MOS-LQOn

- The average of S-MOS-LQOn scores across all test conditions shall be ≥ 3.0
- As a performance objective, the average of the S-MOS-LQOn scores across all test conditions should be ≥ 3.5

N-MOS-LQOn

- The average of the N-MOS-LQOn scores across all test conditions shall be ≥ 2.3
- As a performance objective, the average of N-MOS-LQOn scores across all test conditions should be ≥ 3.0

G-MOS-LQOn

- No requirement.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

5.11.3 Connections with Handheld hands-free UE

It is recommended that the UE meets the following performance objectives:

S-MOS-LQOn

- The average of S-MOS-LQOn scores across all five test conditions should be ≥ 3.3

N-MOS-LQOn

- The average of N-MOS-LQOn scores across all test conditions should be ≥ 2.2

G-MOS-LQOn

- No performance objective.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

5.11.4 Connections with electrical interface UE

The UE shall comply with the following requirements:

S-MOS-LQOn

- The average of S-MOS-LQOn scores across all test conditions shall be ≥ 3.0
- As a performance objective, the average of the S-MOS-LQOn scores across all test conditions should be ≥ 3.5

N-MOS-LQOn

- The average of the N-MOS-LQOn scores across all test conditions shall be ≥ 2.3
- As a performance objective, the average of N-MOS-LQOn scores across all test conditions should be ≥ 3.0

G-MOS-LQOn

- No performance objective.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

5.12 Delay

5.12.0 UE delay definition

5.12.0.1 Acoustic interfaces

For UMTS circuit-switched operation and MTSI-based speech with LTE, NR or WLAN access, the UE delays in the send and receive directions are defined for acoustic interfaces as:

- The UE delay in the send (uplink) direction is the delay between the first acoustic event at the MRP to the last bit of the corresponding speech frame at the UE antenna
- The UE delay in the receive (downlink) direction is the delay between the first bit of a speech frame at the UE antenna and the first acoustic event at the DRP corresponding to that speech frame

NOTE: In order to harmonize UMTS and LTE delay definitions, the reference points for UMTS UE delay have been changed in Rel-12. Prior to Rel-12, the UE reference points for UMTS were implicitly defined by the compensation factors declared by system simulator vendors, i.e. half of the air interface delay was attributed to the UE, and the last acoustic event at DRP was used for the receive measurement instead of the first.

Considering 10ms for half of the transmission time in each direction of a UMTS call, a speech frame size of 20ms, a codec look-ahead of 5ms, and a difference between the first and the last acoustic event of 20 ms, the previous reference points took into account a UE implementation independent delay of $2 \times 10 \text{ms} + 25 \text{ms} + 20 \text{ms} = 65 \text{ms}$. The same UE delay remains in the new definition above, which attributes the full air interface delay to the UE but uses the first acoustic event at the DRP, instead of the last ($2 \times 20 \text{ms} + 25 \text{ms} + 0 \text{ms} = 65 \text{ms}$). Hence, the UMTS requirements with these new reference points remain the same.

5.12.0.2 Electrical interfaces

The UE delays in the send and receive directions are defined for electrical interfaces as:

- The UE delay in the send (uplink) direction is the delay between the first electrical event at the input of the electrical interface (analogue or wired digital connection) or first bit of a speech frame at the UE antenna of the wireless digital interface (wireless digital connection) to the last bit of the corresponding speech frame at the UE antenna
- The UE delay in the receive (downlink) direction is the delay between the first bit of a speech frame at the UE antenna and the first electrical event at the output of the electrical interface (analogue or wired digital connection) or first bit of a speech frame at the UE antenna of the wireless digital interface (wireless digital connection) corresponding to that speech frame.

5.12.1 Handset UE

It is in general desirable to minimize UE delays to ensure low enough end-to-end delays and hence a good conversational experience, guidance is found in ITU-T Recommendation G.114.

For UMTS circuit-switched AMR speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be ≤ 220 ms and should be ≤ 185 ms.

NOTE: A delay ≤ 185 ms might not be achievable in some cases due to UE implementation trade-offs between delay and other parameters such as speech quality enhancement, performance of noise reduction or UE power consumption optimization, and UE implementation issues such as rebuffering between components.

For MTSI-based speech-only with LTE, NR or WLAN access in error and jitter free conditions and AMR speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) should be ≤ 150 ms. If this performance objective cannot be met, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be ≤ 190 ms.

For MTSI-based speech-only with LTE, NR or WLAN access in conditions with simulated packet arrival time variations and packet loss and AMR speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall be less than or equal to the delay requirements in Table 8bis, while meeting the speech quality targets defined.

NOTE: The UE delay requirements for MTSI-based speech-only with LTE, NR or WLAN access are derived from:

- A speech frame buffering and codec look-ahead of 25ms.
- An air interface transmission time of 1ms on receive and 1ms on the send direction.
- A budget allowance for a jitter buffer depth of 40ms for error and jitter free conditions and test conditions 0 and 1 of Table 8bis, and 80ms for test condition 2 of Table 8bis.
- A budget allowance for vendor specific implementation of 83ms corresponding to the performance objective and 123ms corresponding to the required maximum UE send and receive delay.

Table 8bis: UE delay and speech quality requirements for LTE, NR and WLAN access

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 150$ ms	$T_S + T_R \leq 190$ ms	No requirement, reference score MOS-LQO _{REF}
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 150$ ms	$T_S + T_R \leq 190$ ms	MOS-LQO _{TEST} \geq MOS-LQO _{REF} - 0.3
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 190$ ms	$T_S + T_R \leq 230$ ms	MOS-LQO _{TEST} \geq MOS-LQO _{REF} - 0.3
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and target BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1]. The delay profiles in test condition 1 and 2 are static delay variation conditions and do not expose the UE to packet delay variations in the full range of the packet delay budget as defined for QCI1 in 3GPP TS 23.203 [18]. A third test condition that exposes the UE to non-stationary packet delay variations experienced in live operation and packet delay variations in the full range of the packet delay budget for QCI1, and accompanied delay and speech quality requirements, is for further study.				
NOTE 2: The purpose of this test is to provide a relative comparison of the objective speech quality between the reference and test conditions. This test is not to be construed as a method to evaluate the absolute objective speech quality of the device.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

5.12.2 Headset UE

5.12.2.1 Wired headset

It is in general desirable to minimize UE delays to ensure low enough end-to-end delays and hence a good conversational experience, guidance is found in ITU-T Recommendation G.114.

For UMTS circuit-switched AMR speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 220\text{ms}$ and should be $\leq 185\text{ms}$.

NOTE: A delay $\leq 185\text{ ms}$ might not be achievable in some cases due to UE implementation trade-offs between delay and other parameters such as speech quality enhancement, performance of noise reduction or UE power consumption optimization, and UE implementation issues such as rebuffering between components.

For MTSI-based speech-only with LTE, NR or WLAN access in error and jitter free conditions and AMR speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) should be $\leq 150\text{ms}$. If this performance objective cannot be met, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 190\text{ms}$.

For MTSI-based speech-only with LTE, NR or WLAN access in conditions with simulated packet arrival time variations and packet loss and AMR speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall be less than or equal to the delay requirements in Table 8, while meeting the speech quality targets defined.

NOTE: The UE delay requirements for MTSI-based speech-only with LTE, NR or WLAN access are derived from:

- A speech frame buffering and codec look-ahead of 25ms.
- An air interface transmission time of 1ms on receive and 1ms on the send direction.
- A budget allowance for a jitter buffer depth of 40ms for error and jitter free conditions and test conditions 0 and 1 of Table 8ter, and 80ms for test condition 2 of Table 8ter.
- A budget allowance for vendor specific implementation of 83ms corresponding to the performance objective and 123ms corresponding to the required maximum UE send and receive delay.

Table 8ter: UE delay and speech quality requirements for LTE, NR and WLAN access

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 150\text{ms}$	$T_S + T_R \leq 190\text{ms}$	No requirement, reference score $\text{MOS-LQO}_{\text{REF}}$
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 150\text{ms}$	$T_S + T_R \leq 190\text{ms}$	$\text{MOS-LQO}_{\text{TEST}} \geq \text{MOS-LQO}_{\text{REF}} - 0.3$
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 190\text{ms}$	$T_S + T_R \leq 230\text{ms}$	$\text{MOS-LQO}_{\text{TEST}} \geq \text{MOS-LQO}_{\text{REF}} - 0.3$
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and target BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1]. The delay profiles in test condition 1 and 2 are static delay variation conditions and do not expose the UE to packet delay variations in the full range of the packet delay budget as defined for QC11 in 3GPP TS 23.203 [18]. A third test condition that exposes the UE to non-stationary packet delay variations experienced in live operation and packet delay variations in the full range of the packet delay budget for QC11, and accompanied delay and speech quality requirements, is for further study.				
NOTE 2: The purpose of this test is to provide a relative comparison of the objective speech quality between the reference and test conditions. This test is not to be construed as a method to evaluate the absolute objective speech quality of the device.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

5.12.2.2 Wireless headset

For further study.

5.12.3 Electrical interface UE

It is in general desirable to minimize UE delays to ensure low enough end-to-end delays and hence a good conversational experience, guidance is found in ITU-T Recommendation G.114.

The delay budget B_D to be considered in the performance requirements and objectives depends on the type of electrical interface UE and is given by Table 8quater1.

Table 8quater1: Delay budget for different types of electrical interface UE

Electrical interface type	B_D [ms]
Analogue	0
Wireless digital	20
Wired digital	20
NOTE: The delay for analogue to digital conversion (and vice versa) in the wired digital connection is considered to be part of the budget allowance for vendor specific implementation in the UE delay requirements.	

For UMTS circuit-switched AMR speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 220+B_D$ ms and should be $\leq 185+B_D$ ms.

NOTE1: A delay $\leq 185+B_D$ ms might not be achievable in some cases due to UE implementation trade-offs between delay and other parameters such as speech quality enhancement, performance of noise reduction or UE power consumption optimization, and UE implementation issues such as rebuffering between components.

For MTSI-based speech-only with LTE, NR or WLAN access in error and jitter free conditions and AMR speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) should be $\leq 150+B_D$ ms. If this performance objective cannot be met, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 190+B_D$ ms.

For MTSI-based speech-only with LTE, NR or WLAN access in conditions with simulated packet arrival time variations and packet loss and AMR speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall be less than or equal to the delay requirements in Table 8quarter2, while meeting the speech quality targets defined.

NOTE2: The UE delay requirements for MTSI-based speech-only with LTE, NR or WLAN access are derived from:

- A speech frame buffering and codec look-ahead of 25ms.
- An air interface transmission time of 1ms on receive and 1ms on the send direction.
- A budget allowance for a jitter buffer depth of 40ms for error and jitter free conditions and test conditions 0 and 1 of Table 8quarter, and 80ms for test condition 2 of Table 8quarter.
- A budget allowance for vendor specific implementation of 83ms corresponding to the performance objective and 123ms corresponding to the required maximum UE send and receive delay.

Table 8quarter2: UE delay and speech quality requirements for LTE, NR and WLAN access

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 150+B_D$ ms	$T_S + T_R \leq 190+B_D$ ms	No requirement, reference score MOS-LQO _{REF}
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 150+B_D$ ms	$T_S + T_R \leq 190+B_D$ ms	MOS-LQO _{TEST} \geq MOS-LQO _{REF} -0.3
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 190+B_D$ ms	$T_S + T_R \leq 230+B_D$ ms	MOS-LQO _{TEST} \geq MOS-LQO _{REF} -0.3
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and target BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1]. The delay profiles in test condition 1 and 2 are static delay variation conditions and do not expose the UE to packet delay variations in the full range of the packet delay budget as defined for QCI1 in 3GPP TS 23.203 [18]. A third test condition that exposes the UE to non-stationary packet delay variations experienced in live operation and packet delay variations in the full range of the packet delay budget for QCI1, and accompanied delay and speech quality requirements, is for further study.				
NOTE 2: The purpose of this test is to provide a relative comparison of the objective speech quality between the reference and test conditions. This test is not to be construed as a method to evaluate the absolute objective speech quality of the device.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

5.13 Echo control characteristics

Echo cancellation is commonly deployed in the UE to fulfil the Acoustic echo control requirements. Echo cancellers are complex devices of which the subjective performance is affected by several attributes. The main attribute is its ability to suppress echo. The process of suppressing the echo may introduce impairments to the near-end speech signal, mainly manifested as distortion or clipping of the near-end signal during simultaneous speech from both the far and near-end ("double-talk").

To characterise the echo control performance, the activity (in % of total time) and averaged level difference (in dB) of the duration of any level difference according to Figure 6a and Table 8a between the clean near-end signal and the send-signal shall be reported for "double-talk" as well as the far-end single talk periods adjacent to the "double-talk".

NOTE: The limits for specifying the categories in Figure 6a and Table 8a are provisional pending further analysis and validation.

NOTE: The categories in Figure 6a and Table 8a are labelled in a functional order and the subjective impression of the respective categories is for further study.

All percentage values and averaged level differences described in the relevant test of 3GPP TS 26.132 shall be reported.

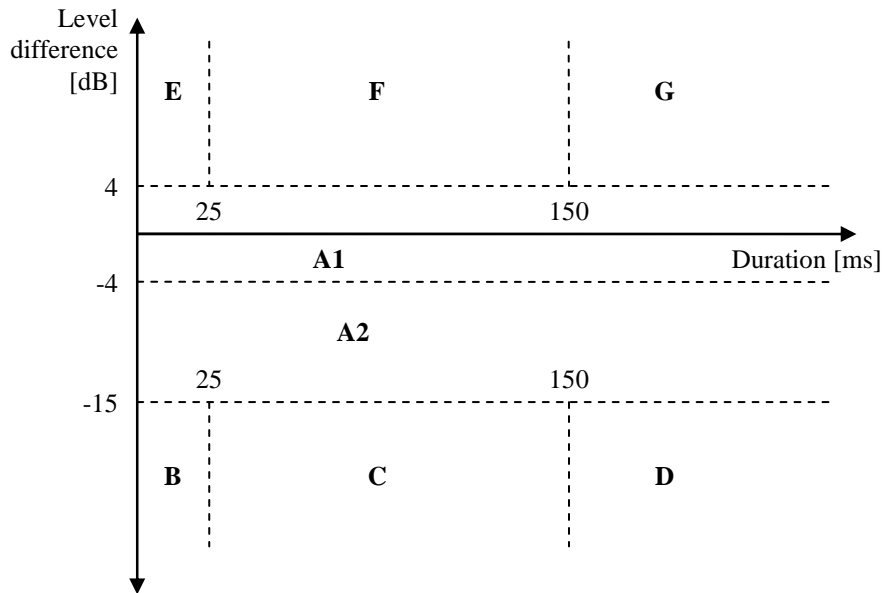


Figure 6a: Classification of echo canceller performance

Table 8a: Categories for echo canceller performance classification

Category	Description
A1	Full-duplex and full transparency
A2	Full-duplex with level loss in Tx
B	Very short clipping
C	Short clipping resulting in loss of syllables
D	Clipping resulting in loss of words
E	Very short residual echo
F	Echo bursts
G	Continuous echo

5.13.1 Handset

Requirements are for further study.

5.13.2 Headset

Requirements are for further study.

5.13.3 Handheld hands-free

Requirements are for further study.

5.13.4 Desktop and vehicle mounted hands-free

Requirements are for further study.

5.13.5 Electrical interface

Requirements are for further study.

5.14 Clock accuracy

For MTSI-based speech-only with LTE, NR or WLAN access, the clock skew in send direction between the device under test and the reference client should be less than 50 PPM (in absolute value) in error-free conditions.

Compliance shall be checked by the relevant test described in TS 26.132.

5.15 Jitter buffer management behaviour

For MTSI-based speech-only with LTE, NR or WLAN access, a jitter buffer is used in receiving to handle the variation in packet receiver timing (see clause 8 of TS 26.114 [17]).

If the jitter buffer management (JBM) behaviour is evaluated, the following statistics shall be reported for conditions specified in TS 26.132:

- Delay histogram (on a per sentence basis)
- Quality loss histogram (on a per sentence pair basis)

and all measured delay and quality loss values for these conditions shall be reported as a function of measurement time, together with minimum and maximum values.

The relevant test is described in 3GPP TS 26.132.

6 Wideband telephony transmission performance

6.1 Applicability

The performance requirements in this clause shall apply when UE is used to provide wideband telephony, either as a stand-alone service, or as part of a multimedia service. The requirements in the clause apply only when the far-end terminal is also providing wideband, and not narrowband telephony. When a wideband-enabled terminal is providing narrowband telephony, the requirements in clause 5, 'narrowband telephony transmission performance' shall apply.

6.2 Overall loss/loudness ratings

6.2.1 General

An international connection involving a 3G, LTE, NR or WLAN network and the PSTN should meet the overall loudness rating (OLR) limits in ITU-T Recommendation G.111 [4]. The national parts of the connection should therefore meet the send and receive loudness rating (SLR, RLR) limits in ITU-T Recommendation G.121 [5].

For the case where digital routings are used to connect the 3G, LTE, NR or WLAN network to the international chain of circuits, the SLR and RLR of the national extension will be largely determined by the SLR and RLR of the 3G, LTE, NR or WLAN network. The limits given below are consistent with the national extension limits and long term objectives in ITU-T Recommendation G.121 [5].

The SLR and RLR values for the 3G, LTE, NR or WLAN network apply up to the POI. However, the main determining factors are the characteristics of the UE, including the analogue to digital conversion (ADC) and digital to analogue

conversion (DAC). In practice, it is convenient to specify loudness ratings to the Air Interface. For the normal case, where the 3G, LTE, NR or WLAN network introduces no additional loss between the Air Interface and the POI, the loudness ratings to the PSTN boundary (POI) will be the same as the loudness ratings measured at the Air Interface. However, in some cases loss adjustment may be needed for interworking situations in individual countries.

6.2.2 Connections with handset UE

The nominal values of SLR/RLR to the POI shall be:

$$\text{SLR} = 8 \pm 3 \text{ dB};$$

$$\text{RLR} = 2 \pm 3 \text{ dB}.$$

Where a user-controlled receiving volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. When the control is set to maximum, the RLR shall not be \leq (equal or louder than) -13 dB and shall not be \geq (equal or quieter than) -3 dB.

With the volume control set to the minimum position the RLR shall not be \geq (equal or quieter than) 18 dB.

Compliance shall be checked by the relevant tests described in TS 26.132.

6.2.2a Connections with handset UE in the presence of background noise

In the presence of background noise, the RLR at maximum volume control shall not be \leq (equal or louder than) -13 dB.

Compliance shall be checked by the relevant tests described in TS 26.132.

6.2.3 Connections with desktop and vehicle-mounted hands-free UE

The nominal values of SLR/RLR to/from the POI shall be:

$$\text{SLR} = 13 \pm 4 \text{ dB};$$

$$\text{RLR} = 2 \pm 4 \text{ dB (for vehicle-mounted hands-free UE);}$$

$$\text{RLR} = 5 \pm 4 \text{ dB (for desktop hands-free UE).}$$

1. For a vehicle-mounted hands-free UE:

Where a user-controlled volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. It is recommended that a volume control giving at least 15 dB increase from the nominal RLR (louder) is provided for hands-free units intended to work in the vehicle environment. This is to allow for the increased acoustic noise level in a moving vehicle.

RLR at the maximum volume control setting should be \leq (equal or louder than) -2 dB.

2. For a desktop hands-free UE:

Where a user-controlled volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. It is recommended that a volume control giving at least 15 dB increase from the nominal RLR (louder) is provided for hands-free units. This is to allow for increased acoustic noise level in the usage environment.

RLR at the maximum volume control setting should be \leq (equal or louder than) 1 dB.

Compliance shall be checked by the relevant tests described in TS 26.132.

NOTE: The target value for nominal RLR, as recommended in ITU-T G.111 Annex B – Table B.1 [4], lies between 1 and 3 dB. The higher RLR requirement of 5 dB for desktop hands-free is appreciative of the limitations in transducer output with current typical form factors.

6.2.4 Connections with hand-held hands-free UE

The nominal values of SLR/RLR to/from the POI shall be:

$$\text{SLR} = 13 \pm 4 \text{ dB};$$

$$\text{RLR} = 9 \pm 7 \text{ dB.}$$

Where a user-controlled volume control is provided, the RLR shall meet the nominal value for at least one setting of the control.

The value of RLR at the maximum volume control shall be \leq (equal or louder than) 12 dB. As a performance objective it is recommended that the RLR at the maximum volume control setting is \leq (equal or louder than) 2 dB.

Where a user-controlled volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. It is recommended that a volume control range ≥ 15 dB be provided.

Compliance shall be checked by the relevant tests described in TS 26.132.

6.2.5 Connections with headset UE

The SLR and RLR should be measured and computed using methods given in ITU-T Recommendation P.380 [9]. This Recommendation currently gives a measuring technique for supra-aural earphone and insert type receivers. Study is continuing on other types of ear-pieces in ITU-T Study Group 12.

The nominal values of SLR/RLR to/from the POI shall be:

$$\text{SLR} = 8 \pm 3 \text{ dB;}$$

$$\text{RLR} = 2 \pm 3 \text{ dB;}$$

$$\text{RLR (binaural headset)} = 8 \pm 3 \text{ dB for each earphone.}$$

Where a user-controlled receiving volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. When the control is set to maximum, the RLR shall not be \leq (equal or louder than) -13 dB.

With the volume control set to the minimum position the RLR shall not be \geq (equal or quieter than) 18 dB and shall not be \geq (equal or quieter than) 24 dB for a binaural headset.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

6.2.5a Connections with headset UE in the presence of background noise

In the presence of background noise, the RLR at maximum volume control shall not be \leq (equal or louder than) -13 dB.

Compliance shall be checked by the relevant tests described in TS 26.132.

6.2.6 Connections with electrical interface UE

6.2.6.1 Analogue connection

The nominal values of SJLR/RJLR to/from the POI shall be:

$$\text{SJLR} = 0 \pm 3 \text{ dB;}$$

$$\text{RJLR} = 0 \pm 3 \text{ dB;}$$

Where a user-controlled receiving volume control is provided, the RJLR shall meet the nominal value for at least one setting of the control. When the control is set to maximum, the RJLR shall not be \leq (equal or louder than) -15 dB.

With the volume control set to the minimum position the RJLR shall not be \geq (equal or quieter than) 16 dB.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

6.2.6.2 Digital connection

The nominal values of SJLR/RJLR to/from the POI shall be:

$$\text{SJLR} = 0 \pm 3 \text{ dB;}$$

RJLR = 0 ± 3 dB;

Requirements with different volume settings (other than nominal) are not applicable.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

6.3 Idle channel noise (handset, headset UE, and electrical interface UE)

6.3.1 Sending (handset and headset UE)

The maximum noise level produced by the apparatus at the output of the SS under silent conditions in the sending direction shall not exceed -64 dBm0(A).

NOTE 1: This level includes the eventual noise contribution of an acoustic echo canceller under the condition that no signal is received.

NOTE 2: This figure applies to the total noise level with A-weighting. It is recommended that the level of single frequency disturbances should be ≤ -74 dBm0(A) in the frequency range from 100 Hz to 8 kHz.

Compliance shall be checked by the relevant test described in TS 26.132.

6.3.2 Receiving (handset and headset UE)

The maximum (acoustic) noise level at the handset and headset UE when no signal is transmitted to the input of the SS shall be as follows:

- If no user-controlled receiving volume control is provided, or, if it is provided, at the setting of the user-controlled receiving volume control at which the RLR is equal to the nominal value, the noise measured at the DRP with diffuse-field correction contributed by the receiving equipment alone shall not exceed -57 dBPa(A).
- Where a volume control is provided, the measured noise shall be ≤ -54 dBPa(A) at the maximum setting of the volume control.

For the nominal volume control setting, the level of single frequency disturbances shall be ≤ -60 dBPa(A) in the frequency range from 100 Hz to 10 kHz. As a performance objective it is recommended that the level should be ≤ -64 dBPa(A).

NOTE: In a connection with the PSTN, noise conditions as described in ITU-T Recommendation G.103 [3] can be expected at the input (POI) of the 3G, LTE, NR or WLAN network. The characteristics of this noise may be influenced by the speech transcoding process (for further study).

Compliance shall be checked by the relevant test described in TS 26.132.

6.3.3 Sending (electrical interface UE)

The maximum noise level produced by the apparatus at the output of the SS under silent conditions in the sending direction shall be ≤ -64 dBm0(A).

NOTE 1: This level includes the eventual noise contribution of an acoustic echo canceller under the condition that no signal is received.

NOTE 2: This figure applies to the total noise level with psophometric weighting. It is recommended that the level of single frequency disturbances should be ≤ -74 dBm0(A) in the frequency range from 100 Hz to 8 kHz.

Compliance shall be checked by the relevant test described in TS 26.132.

6.3.4 Receiving (electrical interface UE)

The maximum A-weighted noise level when no signal is applied to the input of the SS shall be as follows:

If no user-controlled receiving volume control is provided, or, if it is provided, at the setting of the user-controlled receiving volume control at which the RJLR is equal to the nominal value, the noise measured at the receive output of the electrical reference interface contributed by the receiving equipment alone shall be ≤ -87 dBV(A) for analogue and -64 dBm0(A) for digital connections.

Where a volume control is provided, the measured noise shall be ≤ -84 dBV(A) for analogue connection at the maximum setting of the volume control.

For the nominal volume control setting, the level of single frequency disturbances should be ≤ -90 dBV(A) for analogue and -67 dBm0(A) for digital connections in the frequency range from 100 Hz to 10 kHz. As a performance objective it is recommended that the level should be ≤ -94 dBV(A) for analogue and -71 dBm0(A) for digital connections.

NOTE: In a connection with the PSTN, noise conditions as described in ITU-T Recommendation G.103 [3] can be expected at the input (POI) of the 3G, LTE, NR or WLAN network. The characteristics of this noise may be influenced by the speech transcoding process (for further study).

Compliance shall be checked by the relevant test described in 3GPP TS 26.132.

6.4 Sensitivity/frequency characteristics

In general it is recommended for all configurations to have a flat sending frequency response.

6.4.1 Handset and headset UE sending

The sensitivity/frequency characteristics shall be as follows:

The sending sensitivity frequency response, measured either from the mouth reference point (MRP) to the digital interface or from the MRP to the SS audio output (digital output of the reference speech decoder of the SS), shall be within a mask, which can be drawn between the points given in table 9. The mask is drawn with straight lines between the breaking points in table 1 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 9: Handset and headset sending sensitivity/frequency mask

Send sensitivity/frequency response Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	0	
200	5	-5
5 000	5	-5
6 300	5	-10
8 000	5	
NOTE: All sensitivity values are expressed in dB on an arbitrary scale.		

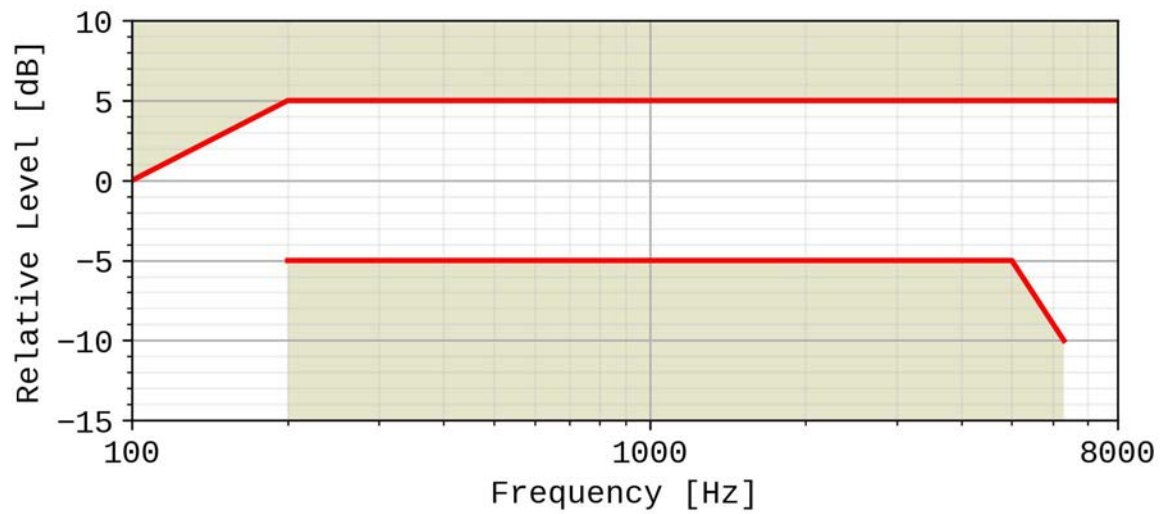


Figure 9: Handset and headset sending sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

6.4.2 Handset and headset UE receiving

The sensitivity/frequency characteristics shall be as follows:

The receiving sensitivity frequency response, measured either from the digital interface to the DRP with diffuse-field correction or from the SS audio input (analogue or digital input of the reference speech encoder of the SS) to the DRP with diffuse-field correction, shall be within a mask, which can be drawn with straight lines between the breaking points in table 10 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 10: Handset and headset receiving sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB) $8 \pm 2 N$	Lower limit (dB) $8 \pm 2 N$
100	6	
200	6	-10
300	6	-6
1 000	6	-6
2 000	8	-6
5 000	8	-6
6 300	8	-12
8 000	8	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

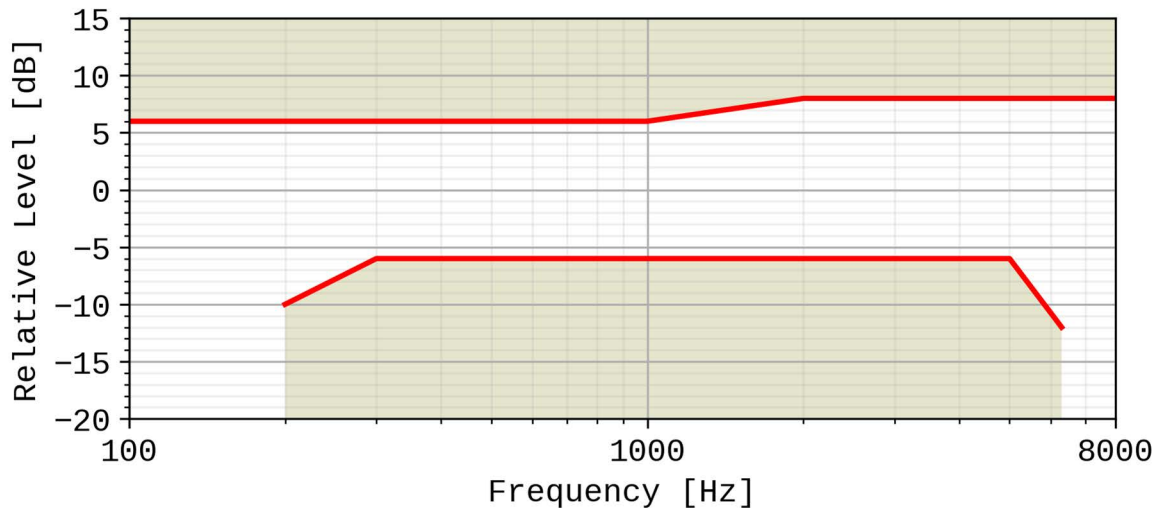


Figure 10: Handset and headset receiving sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

6.4.3 Desktop and vehicle-mounted hands-free UE sending

The sending sensitivity frequency response from the MRP to the SS audio output (digital output of the reference speech decoder of the SS) shall be as follows:

The sending sensitivity frequency response shall be within the mask which can be drawn with straight lines between the breaking points in table 11 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 11: Desktop and vehicle-mounted hands-free sending sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	0	
200	5	-5
5 000	5	-5
6 300	5	-10
8 000	5	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

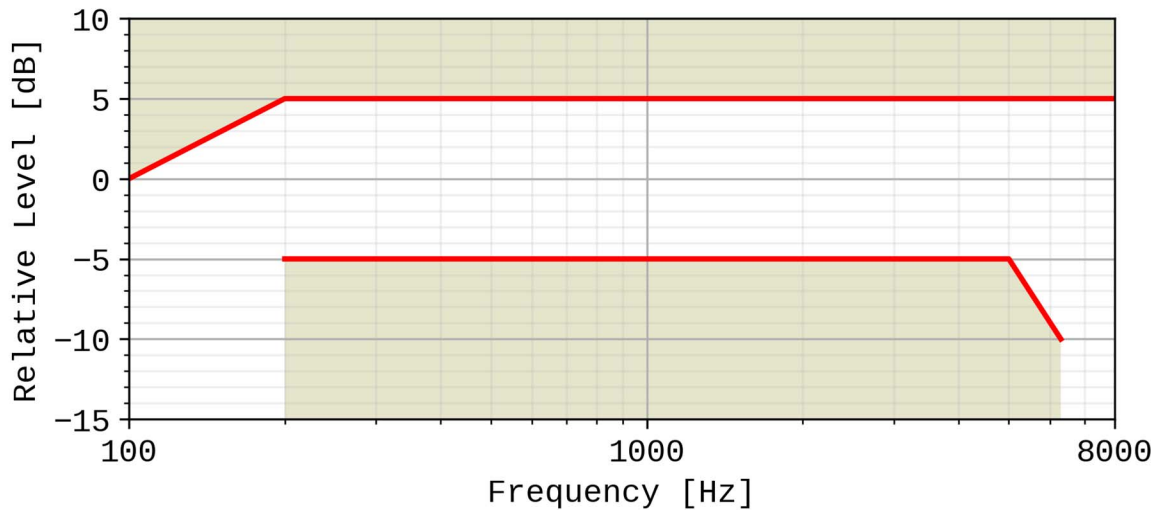


Figure 11: Desktop and vehicle-mounted hands-free sending sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

6.4.4 Desktop and vehicle-mounted hands-free UE receiving

The receiving sensitivity frequency response from the SS audio input (analogue or digital input of the reference speech encoder of the SS) to the free-field shall be as follows:

The receiving sensitivity frequency response shall be within the mask which can be drawn with straight lines between the breaking points in table 12 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 12: Desktop and vehicle-mounted hands-free receiving sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
125	8	
200	8	-12
250	8	-9
315	7	-6
400	6	-6
5 000	6	-6
6 300 Hz	6	-9
8 000 Hz	6	-∞

NOTE: The limits for intermediate frequencies lie on a straight line drawn between the given values on a linear (dB) - logarithmic (Hz) scale.
All sensitivity values are expressed in dB on an arbitrary scale.

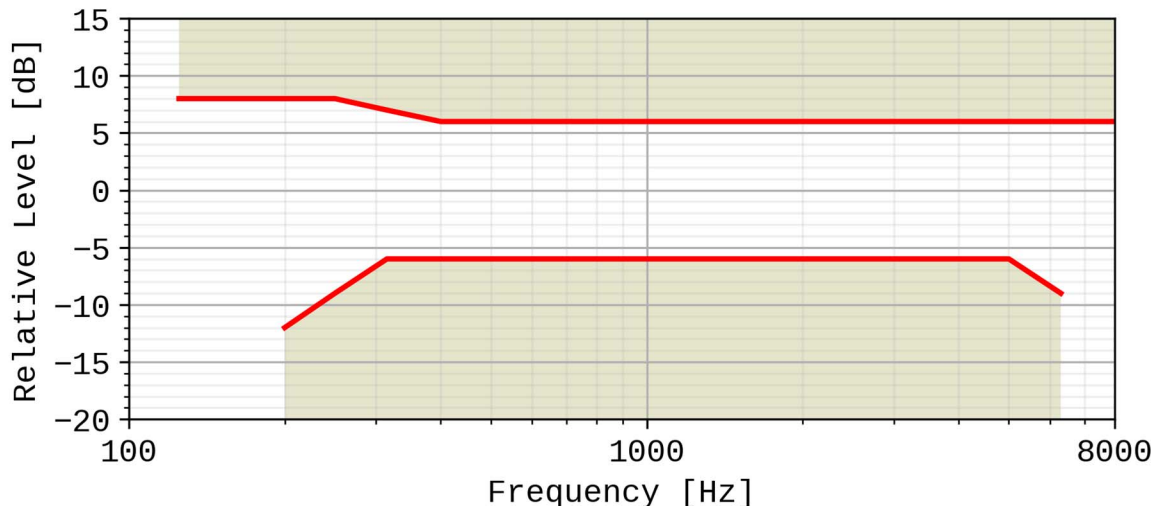


Figure 12: Desktop and vehicle-mounted hands-free receiving sensitivity/frequency mask

It is recommended as a performance objective that the receiving sensitivity frequency response be within the mask which can be drawn with straight lines between the breaking points in table 12.a on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 12a: Performance objective for desktop and vehicle-mounted hands-free receiving sensitivity/frequency response

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	0	
200	0	-18
250	0	-15
315	0	-12
6 300	0	-12
8 000	0	

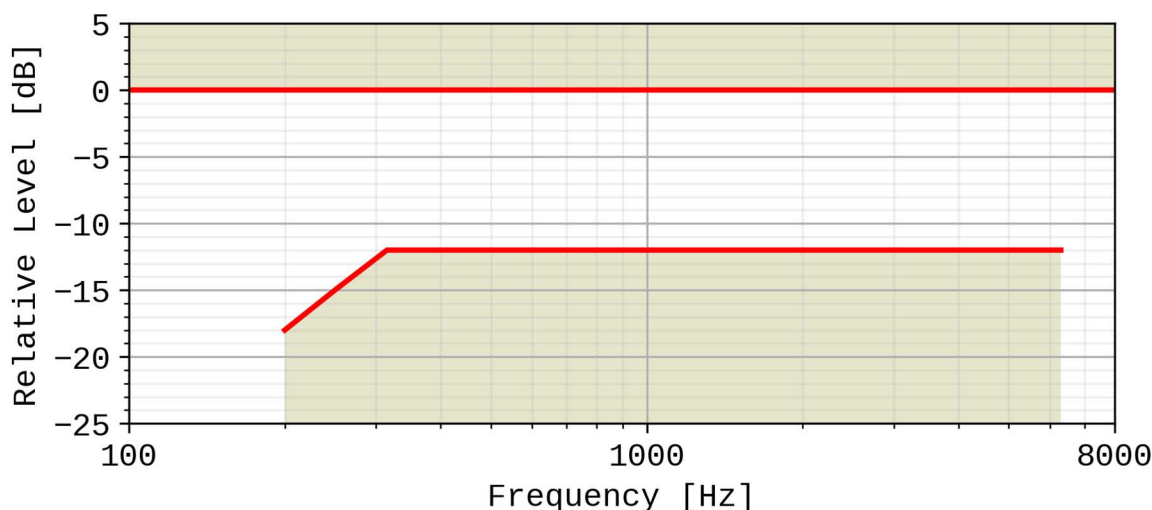


Figure 12a: Performance objective for desktop and vehicle-mounted hands-free receiving sensitivity/frequency response

Compliance shall be checked by the relevant test described in TS 26.132.

6.4.5 Hand-held hands-free UE sending

The sending sensitivity frequency response from the MRP to the SS audio output (digital output of the reference speech decoder of the SS) shall be as follows:

The sending sensitivity frequency response shall be within the mask which can be drawn with straight lines between the breaking points in table 13 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 13: Hand-held hands-free sending sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	0	
200	5	-5
5 000	5	-5
6 300	5	-10
8 000	5	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

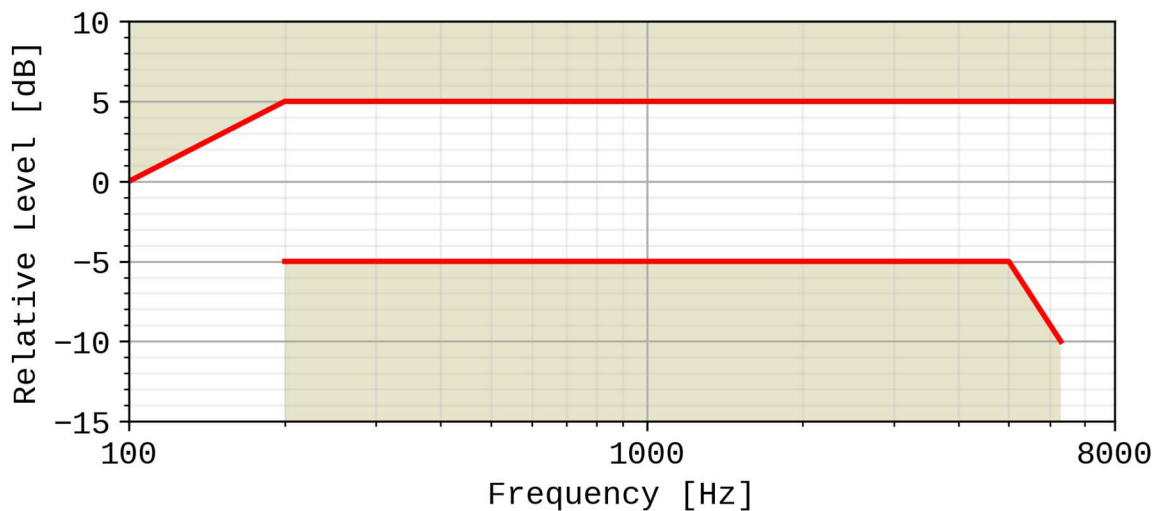


Figure 13: Hand-held hands-free sending sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

6.4.6 Hand-held hands-free UE receiving

The receiving sensitivity frequency response from the SS audio input (analogue or digital input of the reference speech encoder of the SS) to the free-field shall be as follows:

The receiving sensitivity frequency response shall be within the mask which can be drawn with straight lines between the breaking points in table 14 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 14: Hand-held hands-free receiving sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
315	6	
630	6	-12
800	6	-6
4 000	6	-6
6 300	6	-12
8 000	6	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

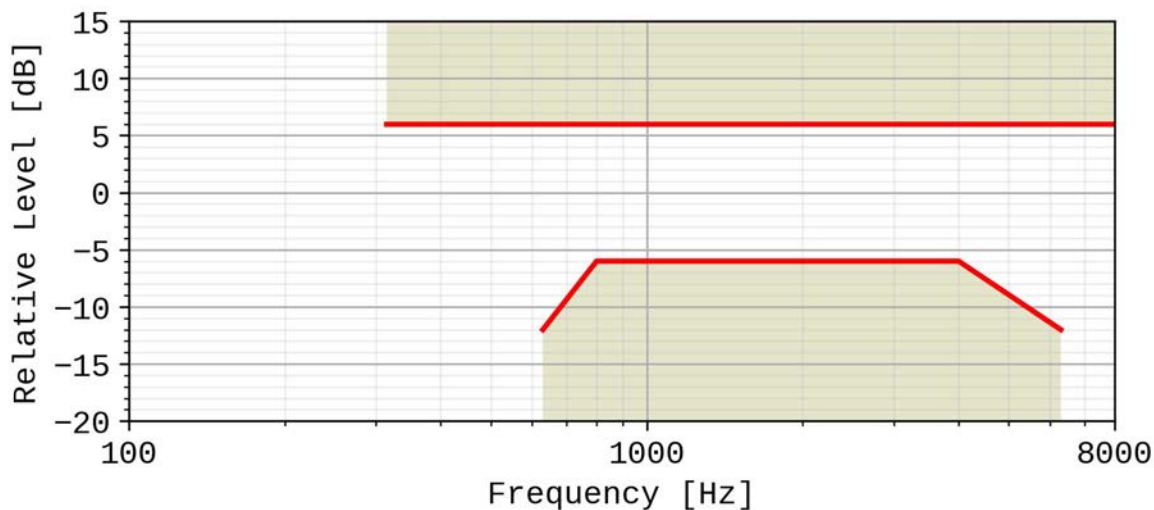


Figure 14: Hand-held hands-free receiving sensitivity/frequency mask

It is recommended as a performance requirement that the receiving sensitivity frequency response be within the mask which can be drawn with straight lines between the breaking points in table 14a on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 14a: Performance objective for hand-held hands-free receiving sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
315	6	
400	6	-12
500	6	-6
4 000	6	-6
6 300	6	-12
8 000	6	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale

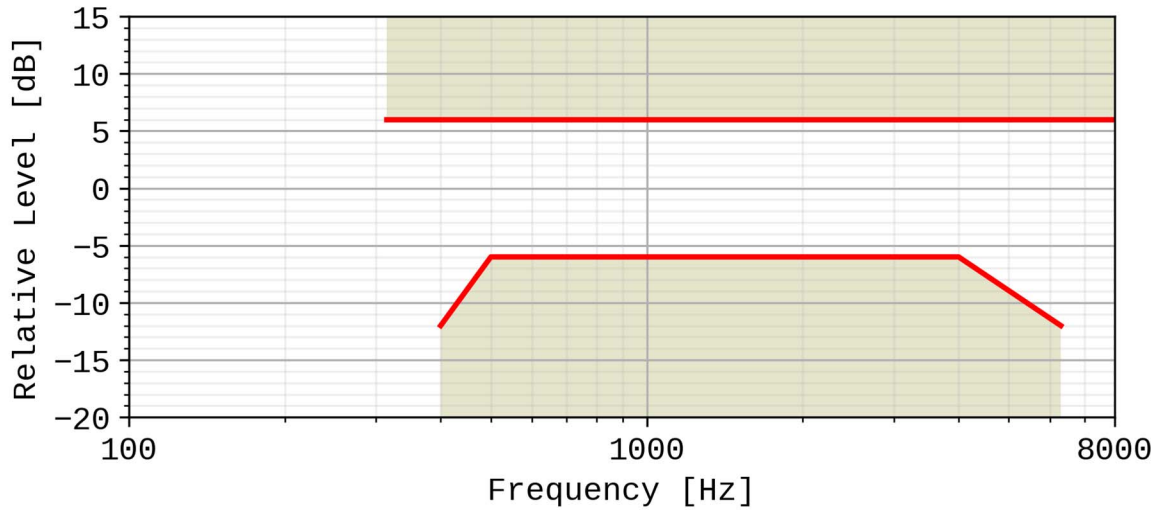


Figure 14.a: Performance objective for hand-held hands-free receiving sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

6.4.7 Electrical interface UE sending

The sensitivity/frequency characteristics shall be as follows:

The sending sensitivity frequency response measured at the electrical reference point shall be within a mask, which can be drawn between the points given in table 14a1. The mask is drawn with straight lines between the breaking points in table 14a1 on a logarithmic (frequency) - linear (dB sensitivity) scale.

NOTE: A tilt above 1 kHz is to compensate for the mouth to microphone acoustic path when the microphone is assumed to be hanging on a headset on the side of the head.

Table 14a1: Electrical interface sending sensitivity/frequency mask

Frequency (Hz)	Upper limit	Lower limit
100	3	
200	3	-3
1 000	3	-3
3 000	10	0
5 000	12	0
6 300	12	0
8 000	12	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

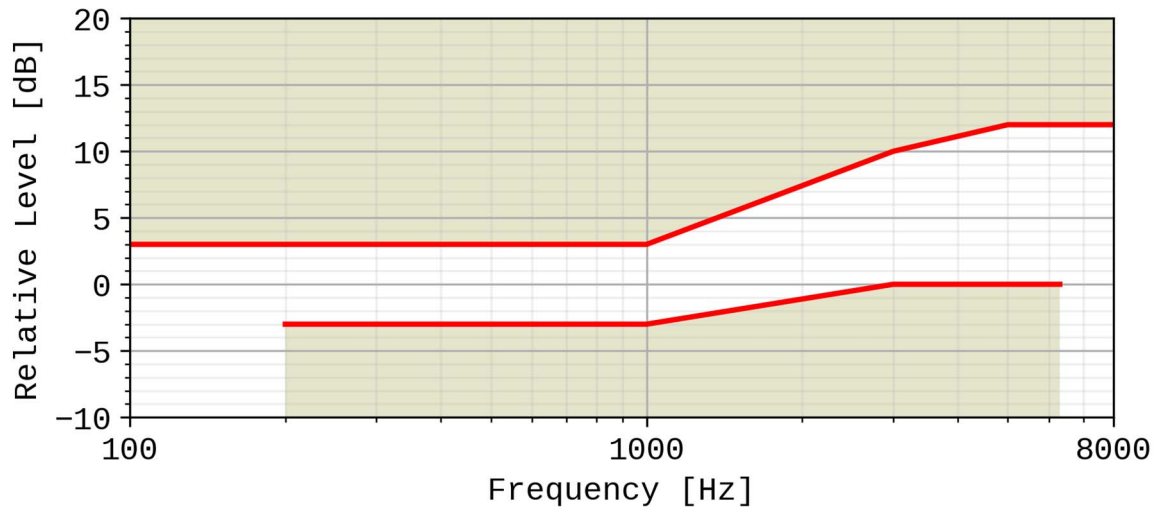


Figure 14a1: Electrical interface sending sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

6.4.8 Electrical interface UE receiving

The sensitivity/frequency characteristics shall be as follows:

The receiving sensitivity frequency response measured at the output of the electrical interface UE shall be within a mask, which can be drawn with straight lines between the breaking points in table 14a2 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 14a2: Electrical interface receiving sensitivity/frequency mask

Frequency (Hz)	Upper limit	Lower limit
100	2	
200	2	-7
300	2	-5.5
1 000	2	-2
2 000	2	-2
5 000	2	-6
6 300	2	-12
8 000	2	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

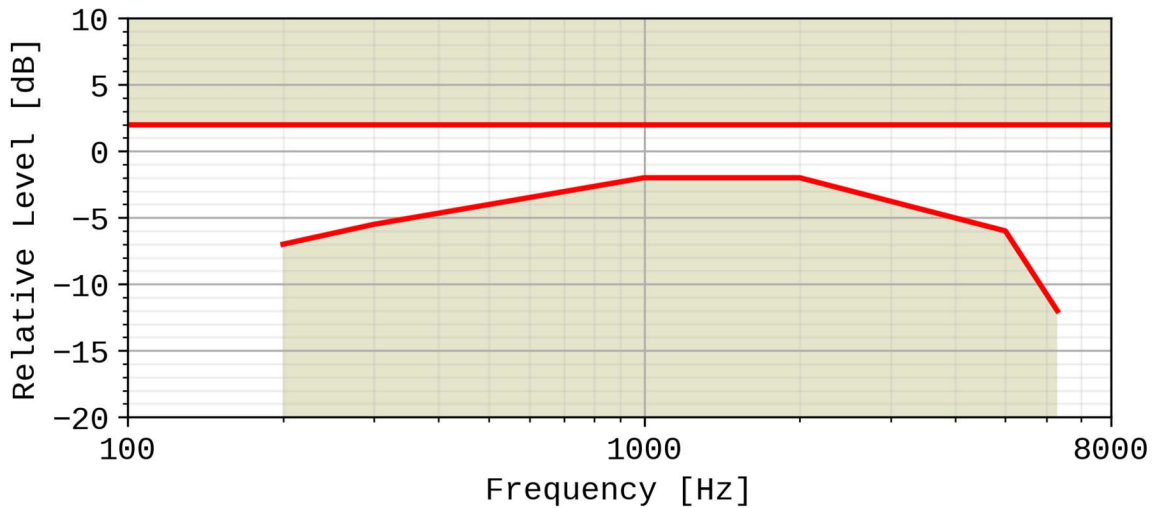


Figure 14b2: Electrical interface receiving sensitivity/frequency mask

Compliance shall be checked by the relevant test described in TS 26.132.

6.5 Sidetone characteristics (handset, headset, and analogue electrical interface UE)

6.5.1 Sidetone loss

The talker sidetone masking rating (STMR) shall be ≥ 15 dB and should be ≤ 23 dB for the nominal setting of the volume control. For all other positions of the volume control, the STMR shall be ≥ 10 dB.

In case the STMR is below the lower limit also when the electrical sidetone path has been disabled, the result shall not be regarded as a failure.

Compliance shall be checked by the relevant test described in TS 26.132.

NOTE 1: Where a user-controlled receiving volume control is provided, it is recommended that the sidetone loss is independent of the volume control setting.

NOTE 2: In general, it is recommended to provide a terminal sidetone path for handset and headset UEs.

NOTE 3: In case the human air-conducted sidetone paths are obstructed (one example being some binaural insert type headset UEs), it is important to provide a terminal sidetone path.

NOTE 4: The STMR calculation algorithm being used was developed for quantifying the audibility of the electrical sidetone path using a sealed coupler. The air-conducted path was not intended to be included in the test setup. A lower STMR limit was specified to avoid annoying effects (e.g. howling, increase of ambient noise level in the ear) of an excessive electrical sidetone. In HATS-based measurements, the air-conducted path cannot be avoided in the test setup. With some UE form factors the air-conducted path can be substantial resulting in low STMR figures also when there are no annoying effects from any excessive electrical sidetone. See ITU-T Recommendation P.76 for definitions of sidetone paths.

6.5.2 Sidetone delay

The maximum sidetone delay shall be ≤ 5 ms, measured in an echo-free setup.

NOTE: The measured result is only applicable where the level of the electrical sidetone is sufficiently high to be measured. While the STMR value may indicate the presence of sidetone it should be ensured that this is not primarily due to the acoustical or mechanical sidetone path when interpreting sidetone delay results.

Compliance shall be checked by the relevant test described in TS 26.132.

6.6 Stability loss

The stability loss presented to the PSTN by the 3G, LTE, NR or WLAN network at the POI should meet the principles of the requirements in clauses 2 and 3 of ITU-T Recommendation G.122 [6]. These requirements will be met if the attenuation between the digital input and digital output at the POI is ≥ 6 dB at all frequencies in the range 100 Hz to 8 kHz under the worst case acoustic conditions at the UE (any acoustic echo control should be enabled). For the normal case of digital connection between the Air Interface and the POI, the stability requirement can be applied at the Air Interface.

The worst case acoustic conditions will be as follows (with volume control set to maximum for each following condition):

Handset UE: the handset lying on, and the transducers facing, a hard surface with the ear-piece uncapped;

Headset UE: for further study;

Hands-free UE: no requirement other than echo loss.

NOTE: The test procedure must take into account the switching effects of echo control and discontinuous transmission (DTX) if applicable.

6.7 Echo control

6.7.1 General

The echo loss (EL) presented by the 3G, LTE, NR or WLAN network at the POI should be sufficient during single-talk. This takes into account the fact that the UE is likely to be used in connections with high transmission delay and in a wide range of noise environments.

The use of acoustic echo control is not mandated for 3G, LTE, NR or WLAN networks and the connection between the UE and the POI is zero loss. Therefore the acoustic echo control provided in the UE should provide a sufficient TCLw at the POI over the likely range of acoustic end delays.

If acoustic echo control is provided by voice switching, comfort noise should be injected. This comfort noise shall operate in the same way as that used in DTX.

6.7.2 Acoustic echo control in desktop and vehicle-mounted hands-free UE

The TCLw for the desktop and vehicle-mounted hands-free UE shall be ≥ 40 dB for any setting of the volume control.

The TCLw for the desktop hands-free and vehicle-mounted hands-free UE shall be ≥ 46 dB when measured under free-field conditions at the nominal setting of the volume control.

NOTE: A TCLw for desktop hands-free and vehicle-mounted hands-free UE of ≥ 55 dB is recommended as a performance objective when measured under free-field conditions at the nominal setting of the volume control. Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

The echo canceller should be designed to cope with the expected reverberation and dispersion. In the case of the hands-free UE, this reverberation and dispersion may be time variant. Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

6.7.3 Acoustic echo control in hand-held hands-free UE

The TCLw for hand-held hands-free UE shall be ≥ 40 dB for any setting of the volume control.

The TCLw for hand-held hands-free UE shall be ≥ 46 dB at the nominal setting of the volume control.

NOTE: A TCLw for the hand-held hands-free UE of ≥ 55 dB is recommended as a performance objective when measured under free-field conditions at the nominal setting of the volume control. Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

The echo canceller should be designed to cope with the expected reverberation and dispersion. In the case of the hands-free UE, this reverberation and dispersion may be time variant. Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

6.7.4 Acoustic echo control in a handset UE

The TCLw for handset UE shall be ≥ 46 dB for any setting of the volume control.

The TCLw for handset UE should be ≥ 55 dB at the nominal setting of the volume control.

With the volume control set to maximum TCLw should be ≥ 55 dB.

It is recommended that the volume control should be set back to nominal after each call unless TCLw ≥ 55 dB can also be maintained with the maximum volume setting.

NOTE. Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

The echo canceller should be capable of dealing with the variations in handset positions when in normal use. The implications of this are under study.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

6.7.5 Acoustic echo control in a headset UE

The TCLw for headset UE shall be ≥ 46 dB for any setting of the volume control.

The TCLw for headset UE shall be ≥ 55 dB at the nominal setting of the volume control.

The volume control shall be set back to nominal after each call unless a TCLw ≥ 55 dB can also be maintained with the maximum volume setting.

NOTE: Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

Due to the obstacle effect of the head in this type of terminal, careful design might mean that no active echo control is necessary.

The echo cancellation algorithm should be designed to cope with the expected reverberation and dispersion.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

6.7.6 Echo control in an electrical interface UE

The TCLw for electrical interface UE shall be ≥ 46 dB for any setting of the volume control.

The TCLw for electrical interface UE shall be ≥ 55 dB at the nominal setting of the volume control.

The volume control shall be set back to nominal after each call unless a TCLw ≥ 55 dB can also be maintained with the maximum volume setting.

NOTE: Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

The echo cancellation algorithm should be designed to cope with the expected reverberation and dispersion.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

6.8 Distortion

6.8.1 Sending distortion (excluding electrical interface UE)

The sending part shall meet the following distortion requirements:

NOTE 1: Digital signal processing other than the transcoder itself is included in this requirement (e.g., echo cancelling).

Distortion shall be measured between the MRP and the SS audio output (output of the reference speech decoder of the SS). The ratio of signal-to-total distortion power measured with the proper noise weighting (see table 4 of ITU-T Recommendation G.223) shall be above the limits given in table 15.

NOTE 2: Frequencies from 315 Hz to 816 Hz do not apply to the hands-free UE case, but only to handset and headset UE.

Table 15: Limits for signal-to-total distortion ratio

Frequency (Hz)	Sending level (dBPa at the MRP)	Sending Ratio (dB)
315	-4,7	28
408	-4,7	32
510	-4,7	32
816	-4,7	32
1 020	5	30
	0	35
	-4,7	35
	-10	33
	-15	30
	-20	27

Limits for intermediate levels are found by drawing straight lines between the breaking points in table 15 on a linear (dB signal level) - linear (dB ratio) scale.

Compliance of the sending distortion shall be checked by the test described in TS 26.132.

NOTE 3: It should be ensured that the test signal is treated by speech processing algorithms as a speech-like signal, and not a noise-like signal. Test signals with a time-stationary envelope may be treated by certain algorithms, e.g., noise suppression algorithms defined in 3GPP TS 06.77 R99 [16], as a noise-like signal. If speech processing algorithms, including but not limited to noise suppression algorithms, are shown to treat the test signal as a noise-like signal, even where an activation signal has been utilized, then the test should be repeated with said speech processing algorithms disabled. The results of both sets of tests and the state of the processing algorithms should be documented in the test report.

6.8.2 Receiving (excluding electrical interface UE)

The receiving part between the SS audio input (input of the reference speech encoder of the SS) and the applicable acoustic measurement point (DRP with diffuse-field correction for handset and headset modes; free field correction for hands-free modes) shall meet the requirements in this clause at the nominal setting of the volume control (except where another volume setting is specified):

The ratio of signal to total distortion power measured with the proper noise weighting (see table 4 of ITU-T Recommendation G.223) shall be above the limits given in table 16 when the sound pressure at the applicable acoustic measurement point is < 10 dBPa. For a sound pressure ≥ 10 dBPa at the applicable acoustic measurement point there is no distortion requirement.

NOTE 1: Frequencies from 315 Hz to 816 Hz do not apply to the hands-free UE case, only to handset and headset UE.

Table 16: Limits for signal-to-total distortion ratio

Frequency (Hz)	Receiving level at the digital interface (dBm0)	Receiving ratio at nominal volume setting (dB)	Receiving ratio at maximum volume setting (dB)
315	-16	20	
408	-16	28	
510	-16	28	
816	-16	28	
1 020	0	25,5	tbd
	-3	31,5	tbd
	-10	33,5	tbd
	-16	33,5	tbd
	-20	33	tbd
	-30	30,5	tbd
	-40	22,5 (*)	tbd
-45	17,5 (*)	tbd	

NOTE: (*)For levels -40 and -45 dBm0 a lower signal-to-total distortion ratio may not be possible, and hence would not be regarded as a failing result. However, the obtained results would be reported.

Limits for intermediate levels are found by drawing straight lines between the breaking points in the table on a linear (dB signal level) - linear (dB ratio) scale.

Compliance of the receiving distortion shall be checked by the appropriate method in TS 26.132.

NOTE 2: It should be ensured that the test signal is treated by speech processing algorithms as a speech-like signal, and not a noise-like signal. Test signals with a time-stationary envelope may be treated by certain algorithms, e.g., noise suppression algorithms defined in 3GPP TS 06.77 R99 [16], as a noise-like signal.

6.8.3 Sending distortion (electrical interface UE)

The sending part shall meet the following distortion requirements:

NOTE 1: Digital signal processing other than the transcoder itself is included in this requirement (e.g., echo cancelling).

Distortion shall be measured at the output of the electrical reference interface. The ratio of signal-to-total distortion power measured with the proper noise weighting (see table 4 of ITU-T Recommendation G.223) shall be above the limits given in table 16a1 for electrical interface UE with analogue connection and table 16a2 for electrical interface UE with digital connection.

Table 16a1: Limits for signal-to-total distortion ratio for analogue connection

Frequency (Hz)	Sending level (dBV at at the output of the electrical reference interface)	Sending Ratio (dB)
315	-60	28
408	-60	32
510	-60	32
816	-60	32
1 020	-50	30
	-55	35
	-60	35
	-65	33
	-70	30
	-75	27

Table 16a2: Limits for signal-to-total distortion ratio for digital connection

Frequency (Hz)	Sending level (dBm0 at at the output of the electrical reference interface)	Sending Ratio (dB)
315	-16	28
408	-16	32
510	-16	32
816	-16	32
1 020	-6	30
	-11	35
	-16	35
	-21	33
	-26	30
	-31	27

Limits for intermediate levels are found by drawing straight lines between the breaking points in tables 16a1 and 16a2 on a linear (dB signal level) - linear (dB ratio) scale.

Compliance of the sending distortion shall be checked by the test described in TS 26.132.

NOTE 2: It should be ensured that the test signal is treated by speech processing algorithms as a speech-like signal, and not a noise-like signal. Test signals with a time-stationary envelope may be treated by certain algorithms, e.g., noise suppression algorithms defined in 3GPP TS 06.77 R99 [16], as a noise-like signal. If speech processing algorithms, including but not limited to noise suppression algorithms, are shown to treat the test signal as a noise-like signal, even where an activation signal has been utilized, then the test should be repeated with said speech processing algorithms disabled. The results of both sets of tests and the state of the processing algorithms should be documented in the test report.

6.8.4 Receiving distortion (electrical interface UE)

The receiving part between the SS audio input (input of the reference speech encoder of the SS) and applicable electric measurement point (input to the electrical reference interface) shall meet the requirements in this clause at the nominal setting of the volume control (except where another volume setting is specified):

The ratio of signal to total distortion power measured with the proper noise weighting (see table 4 of ITU-T Recommendation G.223) shall be above the limits given in table 16b.

NOTE 1: Frequencies from 315 Hz to 816 Hz do not apply to the hands-free UE case, only to handset and headset UE.

Table 16b: Limits for signal-to-total distortion ratio

Frequency (Hz)	Receiving level at the digital interface (dBm0)	Receiving ratio at nominal volume setting (dB)	Receiving ratio at maximum volume setting (dB)
315	-16	20	
408	-16	28	
510	-16	28	
816	-16	28	
1 020	0	25,5	tbd
	-3	31,2	tbd
	-10	33,5	tbd
	-16	33,5	tbd
	-20	33	tbd
	-30	30,5	tbd
	-40	22,5 (*)	tbd
-45	17,5 (*)	tbd	

NOTE: (*)For levels -40 and -45 dBm0 a lower signal-to-total distortion ratio may not be possible, and hence would not be regarded as a failing result. However, the obtained results would be reported.

Limits for intermediate levels are found by drawing straight lines between the breaking points in table 16b on a linear (dB signal level) - linear (dB ratio) scale.

Compliance of the receiving distortion shall be checked by the appropriate method in TS 26.132.

NOTE 2: It should be ensured that the test signal is treated by speech processing algorithms as a speech-like signal, and not a noise-like signal. Test signals with a time-stationary envelope may be treated by certain algorithms, e.g., noise suppression algorithms defined in 3GPP TS 06.77 R99 [16], as a noise-like signal.

6.9 Void

6.10 Sending performance in the presence of ambient noise

6.10.1 General

For sending, in handset mode, the UE shall reduce the ambient noise picked up by the microphone(s) without significantly degrading the quality of the speech signal.

6.10.2 Connections with handset UE

The UE shall comply with the following requirements:

S-MOS-LQOw

- The average of S-MOS-LQOw scores across all test conditions shall be ≥ 3.0
- As a performance objective, the average of the S-MOS-LQOw scores across all test conditions should be ≥ 3.5

N-MOS-LQOw

- The average of the N-MOS-LQOw scores across all test conditions shall be ≥ 2.3
- As a performance objective, the average of N-MOS-LQOw scores across all test conditions should be ≥ 3.0

G-MOS-LQOw

- No requirement.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

6.10.3 Connections with Handheld hands-free UE

It is recommended that the UE meets the following performance objectives:

S-MOS-LQO_w

- The average of S-MOS-LQO_w scores across all five test conditions should be ≥ 3.4

N-MOS-LQO_w

- The average of N-MOS-LQO_w scores across all test conditions should be ≥ 2.3

G-MOS-LQO_w

- No performance objective.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

6.10.4 Connections with electrical interface UE

The UE shall comply with the following requirements:

S-MOS-LQO_n

- The average of S-MOS-LQO_n scores across all test conditions shall be ≥ 3.0
- As a performance objective, the average of the S-MOS-LQO_n scores across all test conditions should be ≥ 3.5

N-MOS-LQO_n

- The average of the N-MOS-LQO_n scores across all test conditions shall be ≥ 2.3
- As a performance objective, the average of N-MOS-LQO_n scores across all test conditions should be ≥ 3.0

G-MOS-LQO_n

- No performance objective.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

6.11 Delay

6.11.0 UE delay definition

6.11.0.1 Acoustic interfaces

For UMTS circuit-switched operation and MTSI-based speech with LTE, NR or WLAN access, the UE delays in the send and receive directions are defined for acoustic interfaces as:

- The UE delay in the send (uplink) direction is the delay between the first acoustic event at the MRP to the last bit of the corresponding speech frame at the UE antenna
- The UE delay in the receive (downlink) direction is the delay between the first bit of a speech frame at the UE antenna and the first acoustic event at the DRP corresponding to that speech frame

NOTE: In order to harmonize UMTS and LTE delay definitions, the reference points for UMTS UE delay have been changed in Rel-12. Prior to Rel-12, the UE reference points for UMTS were implicitly defined by the compensation factors declared by system simulator vendors, i.e. half of the air interface delay was attributed to the UE, and the last acoustic event at DRP was used for the receive measurement instead of the first.

Considering 10ms for half of the transmission time in each direction of a UMTS call, a speech frame size of 20ms, a codec look-ahead of 5ms, and a difference between the first and the last acoustic event of 20 ms, the previous reference points took into account a UE implementation independent delay of $2 \times 10\text{ms} + 25\text{ms} + 20\text{ms} = 65\text{ms}$. The same UE delay remains in the new definition above, which attributes the full air interface delay to the UE but uses the first acoustic event at the DRP, instead of the last ($2 \times 20\text{ms} + 25\text{ms} + 0\text{ms} = 65\text{ms}$). Hence, the UMTS requirements with these new reference points remain the same.

6.11.0.2 Electrical interfaces

The UE delays in the send and receive directions are defined for electrical interfaces as:

- The UE delay in the send (uplink) direction is the delay between the first electrical event at the input of the electrical interface (analogue or wired digital connection) or first bit of a speech frame at the UE antenna of the wireless digital interface (wireless digital connection) to the last bit of the corresponding speech frame at the UE antenna
- The UE delay in the receive (downlink) direction is the delay between the first bit of a speech frame at the UE antenna and the first electrical event at the output of the electrical interface (analogue or wired digital connection) or first bit of a speech frame at the UE antenna of the wireless digital interface (wireless digital connection) corresponding to that speech frame.

6.11.1 Handset UE

It is in general desirable to minimize UE delays to ensure low enough end-to-end delays and hence a good conversational experience, guidance is found in ITU-T Recommendation G.114.

For UMTS circuit-switched AMR-WB speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 220\text{ms}$ and should be $\leq 185\text{ms}$.

NOTE: A delay $\leq 185\text{ms}$ might not be achievable in some cases due to UE implementation trade-offs between delay and other parameters such as speech quality enhancement, performance of noise reduction or UE power consumption optimization, and UE implementation issues such as rebuffering between components.

For MTSI-based speech-only with LTE, NR or WLAN access in error and jitter free conditions and AMR-WB speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) should be $\leq 150\text{ms}$. If this performance objective cannot be met, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 190\text{ms}$.

For MTSI-based speech-only with LTE, NR or WLAN access in conditions with simulated packet arrival time variations and packet loss and AMR-WB speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall be less than or equal to the delay requirements in Table 16a1, while meeting the speech quality targets defined.

NOTE: The UE delay requirements for MTSI-based speech-only with LTE, NR or WLAN access are derived from:

- A speech frame buffering and codec look-ahead of 25ms.
- An air interface transmission time of 1ms on receive and 1ms on the send direction.
- A budget allowance for a jitter buffer depth of 40ms for error and jitter free conditions and test conditions 0 and 1 of Table 16a1, and 80ms for test condition 2 of Table 16a1.
- A budget allowance for vendor specific implementation of 83ms corresponding to the performance objective and 123ms corresponding to the required maximum UE send and receive delay.

Table 16a1: UE delay and speech quality requirements for LTE, NR and WLAN access

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 150\text{ms}$	$T_S + T_R \leq 190\text{ms}$	No requirement, reference score $\text{MOS-LQO}_{\text{REF}}$
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 150\text{ms}$	$T_S + T_R \leq 190\text{ms}$	$\text{MOS-LQO}_{\text{TEST}} \geq \text{MOS-LQO}_{\text{REF}} - 0.3$
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 190\text{ms}$	$T_S + T_R \leq 230\text{ms}$	$\text{MOS-LQO}_{\text{TEST}} \geq \text{MOS-LQO}_{\text{REF}} - 0.3$
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and target BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1]. The delay profiles in test condition 1 and 2 are static delay variation conditions and do not expose the UE to packet delay variations in the full range of the packet delay budget as defined for QC11 in 3GPP TS 23.203 [18]. A third test condition that exposes the UE to non-stationary packet delay variations experienced in live operation and packet delay variations in the full range of the packet delay budget for QC11, and accompanied delay and speech quality requirements, is for further study.				
NOTE 2: The purpose of this test is to provide a relative comparison of the objective speech quality between the reference and test conditions. This test is not to be construed as a method to evaluate the absolute objective speech quality of the device.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

6.11.2 Headset UE

6.11.2.1 Wired headset

It is in general desirable to minimize UE delays to ensure low enough end-to-end delays and hence a good conversational experience, guidance is found in ITU-T Recommendation G.114.

For UMTS circuit-switched AMR-WB speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 220\text{ms}$ and should be $\leq 185\text{ms}$.

NOTE: A delay $\leq 185\text{ms}$ might not be achievable in some cases due to UE implementation trade-offs between delay and other parameters such as speech quality enhancement, performance of noise reduction or UE power consumption optimization, and UE implementation issues such as rebuffering between components.

For MTSI-based speech-only with LTE, NR or WLAN access in error and jitter free conditions and AMR-WB speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) should be $\leq 150\text{ms}$. If this performance objective cannot be met, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 190\text{ms}$.

For MTSI-based speech-only with LTE, NR or WLAN access in conditions with simulated packet arrival time variations and packet loss and AMR-WB speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall be less than or equal to the delay requirements in Table 16a2, while meeting the speech quality targets defined.

NOTE: The UE delay requirements for MTSI-based speech-only with LTE, NR or WLAN access are derived from:

- A speech frame buffering and codec look-ahead of 25ms.
- An air interface transmission time of 1ms on receive and 1ms on the send direction.
- A budget allowance for a jitter buffer depth of 40ms for error and jitter free conditions and test conditions 0 and 1 of Table 16a2, and 80ms for test condition 2 of Table 16a2.

- A budget allowance for vendor specific implementation of 83ms corresponding to the performance objective and 123ms corresponding to the required maximum UE send and receive delay.

Table 16a2: UE delay and speech quality requirements for LTE, NR and WLAN access

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 150\text{ms}$	$T_S + T_R \leq 190\text{ms}$	No requirement, reference score $\text{MOS-LQO}_{\text{REF}}$
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 150\text{ms}$	$T_S + T_R \leq 190\text{ms}$	$\text{MOS-LQO}_{\text{TEST}} \geq \text{MOS-LQO}_{\text{REF}} - 0.3$
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 190\text{ms}$	$T_S + T_R \leq 230\text{ms}$	$\text{MOS-LQO}_{\text{TEST}} \geq \text{MOS-LQO}_{\text{REF}} - 0.3$
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and target BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1]. The delay profiles in test condition 1 and 2 are static delay variation conditions and do not expose the UE to packet delay variations in the full range of the packet delay budget as defined for QCI1 in 3GPP TS 23.203 [18]. A third test condition that exposes the UE to non-stationary packet delay variations experienced in live operation and packet delay variations in the full range of the packet delay budget for QCI1, and accompanied delay and speech quality requirements, is for further study.				
NOTE 2: The purpose of this test is to provide a relative comparison of the objective speech quality between the reference and test conditions. This test is not to be construed as a method to evaluate the absolute objective speech quality of the device.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

6.11.2.2 Wireless headset

For further study.

6.11.3 Electrical interface UE

It is in general desirable to minimize UE delays to ensure low enough end-to-end delays and hence a good conversational experience, guidance is found in ITU-T Recommendation G.114.

The delay budget B_D to be considered in the performance requirements and objectives depends on the type of electrical interface UE and is given by Table 16a3.

Table 16a3: Delay budget for different types of electrical interface UE

Electrical interface type	B_D [ms]
Analogue	0
Wireless digital	20
Wired digital	20
NOTE: The delay for analogue to digital conversion (and vice versa) in the wired digital connection is considered to be part of the budget allowance for vendor specific implementation in the UE delay requirements.	

For UMTS circuit-switched AMR-WB speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 220 + B_D$ ms and should be $\leq 185 + B_D$ ms.

- NOTE1: A delay $\leq 185 + B_D$ ms might not be achievable in some cases due to UE implementation trade-offs between delay and other parameters such as speech quality enhancement, performance of noise reduction or UE power consumption optimization, and UE implementation issues such as rebuffering between components.

For MTSI-based speech-only with LTE, NR or WLAN access in error and jitter free conditions and AMR-WB speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) should be $\leq 150+B_D$ ms. If this performance objective cannot be met, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 190+B_D$ ms.

For MTSI-based speech-only with LTE, NR or WLAN access in conditions with simulated packet arrival time variations and packet loss and AMR-WB speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall be less than or equal to the delay requirements in Table 16a4, while meeting the speech quality targets defined.

NOTE2: The UE delay requirements for MTSI-based speech-only with LTE, NR or WLAN access are derived from:

- A speech frame buffering and codec look-ahead of 25ms.
- An air interface transmission time of 1ms on receive and 1ms on the send direction.
- A budget allowance for a jitter buffer depth of 40ms for error and jitter free conditions and test conditions 0 and 1 of Table 16a4, and 80ms for test condition 2 of Table 16a4.
- A budget allowance for vendor specific implementation of 83ms corresponding to the performance objective and 123ms corresponding to the required maximum UE send and receive delay.

Table 16a4: UE delay and speech quality requirements for LTE, NR and WLAN access

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 150+B_D$ ms	$T_S + T_R \leq 190+B_D$ ms	No requirement, reference score MOS-LQO _{REF}
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 150+B_D$ ms	$T_S + T_R \leq 190+B_D$ ms	MOS-LQO _{TEST} \geq MOS-LQO _{REF} - 0.3
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 190+B_D$ ms	$T_S + T_R \leq 230+B_D$ ms	MOS-LQO _{TEST} \geq MOS-LQO _{REF} - 0.3
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and target BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1]. The delay profiles in test condition 1 and 2 are static delay variation conditions and do not expose the UE to packet delay variations in the full range of the packet delay budget as defined for QCI1 in 3GPP TS 23.203 [18]. A third test condition that exposes the UE to non-stationary packet delay variations experienced in live operation and packet delay variations in the full range of the packet delay budget for QCI1, and accompanied delay and speech quality requirements, is for further study.				
NOTE 2: The purpose of this test is to provide a relative comparison of the objective speech quality between the reference and test conditions. This test is not to be construed as a method to evaluate the absolute objective speech quality of the device.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

6.12 Echo control characteristics

Echo cancellation is commonly deployed in the UE to fulfil the Acoustic echo control requirements. Echo cancellers are complex devices of which the subjective performance is affected by several attributes. The main attribute is its ability to suppress echo. The process of suppressing the echo may introduce impairments to the near-end speech signal, mainly manifested as distortion or clipping of the near-end signal during simultaneous speech from both the far and near-end ("double-talk").

To characterise the echo control performance, the activity (in % of total time) and averaged level difference (in dB) of the duration of any level difference according to Figure 14b and Table 16b between the clean near-end signal and the send-signal shall be reported for "double-talk" as well as the far-end single talk periods adjacent to the "double-talk".

NOTE: The limits for specifying the categories in Figure 14b and Table 16b are provisional pending further analysis and validation.

NOTE: The categories in Figure 14b and Table 16b are labelled in a functional order and the subjective impression of the respective categories is for further study.

All percentage values and averaged level differences described in the relevant test of 3GPP TS 26.132 shall be reported.

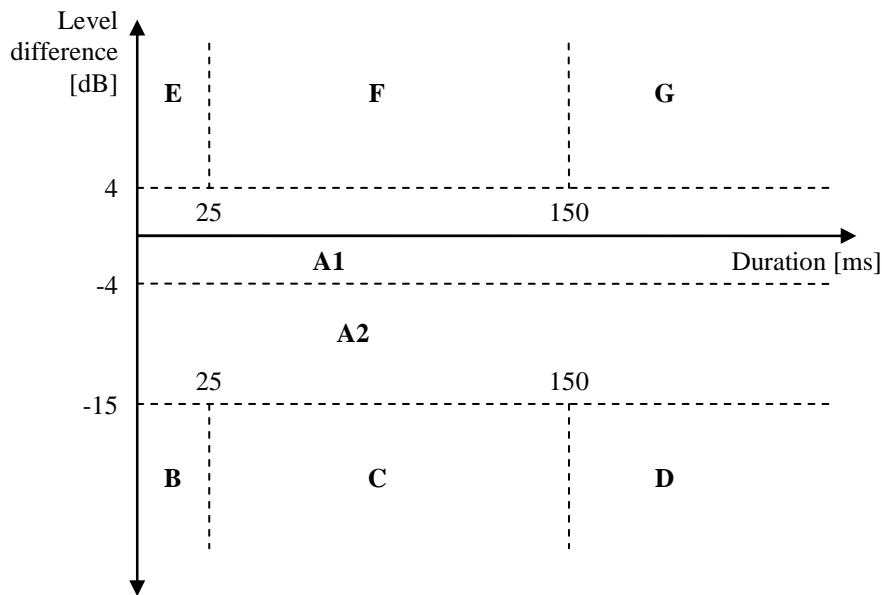


Figure 14b: Classification of echo canceller performance

Table 16b: Categories for echo canceller performance classification

Category	Description
A1	Full-duplex and full transparency
A2	Full-duplex with level loss in Tx
B	Very short clipping
C	Short clipping resulting in loss of syllables
D	Clipping resulting in loss of words
E	Very short residual echo
F	Echo bursts
G	Continuous echo

6.12.1 Handset

Requirements are for further study.

6.12.2 Headset

Requirements are for further study.

6.12.3 Handheld hands-free

Requirements are for further study.

6.12.4 Desktop and vehicle mounted hands-free

Requirements are for further study.

6.12.5 Electrical interface

Requirements are for further study.

6.13 Clock accuracy

For MTSI-based speech-only with LTE, NR or WLAN access, the clock skew in send direction between the device under test and the reference client should be less than 50 PPM (in absolute value) in error-free conditions.

Compliance shall be checked by the relevant test described in TS 26.132.

6.14 Jitter buffer management behaviour

For MTSI-based speech-only with LTE, NR or WLAN access, a jitter buffer is used in receiving to handle the variation in packet receiver timing (see clause 8 of TS 26.114 [17]).

If the jitter buffer management (JBM) behaviour is evaluated, the following statistics shall be reported for conditions specified in TS 26.132:

- Delay histogram (on a per sentence basis)
- Quality loss histogram (on a per sentence pair basis)

and all measured delay and quality loss values for these conditions shall be reported as a function of measurement time, together with minimum and maximum values.

The relevant test is described in 3GPP TS 26.132.

7 Super-wideband telephony transmission performance

7.1 Applicability

The performance requirements in this clause shall apply when a UE is used to provide super-wideband telephony, either as a stand-alone service, or as part of a multimedia service. The requirements in the clause apply only when the far-end terminal is also providing super-wideband telephony. When a super-wideband-enabled terminal is providing narrowband telephony, the requirements in clause 5, 'narrowband telephony transmission performance' shall apply. When a super-wideband-enabled terminal is providing wideband telephony, the requirements in clause 6, 'Wideband telephony transmission performance' shall apply.

7.2 Overall loss/loudness ratings

7.2.1 General

An international connection involving a 3G, LTE, NR or WLAN network and the PSTN should meet the overall loudness rating (OLR) limits in ITU-T Recommendation G.111 [4]. The national parts of the connection should therefore meet the send and receive loudness rating (SLR, RLR) limits in ITU-T Recommendation G.121 [5].

For the case where digital routings are used to connect the 3G, LTE, NR or WLAN network to the international chain of circuits, the SLR and RLR of the national extension will be largely determined by the SLR and RLR of the 3G, LTE,

NR or WLAN network. The limits given below are consistent with the national extension limits and long term objectives in ITU-T Recommendation G.121 [5].

The SLR and RLR values for the 3G, LTE, NR or WLAN network apply up to the POI. However, the main determining factors are the characteristics of the UE, including the analogue to digital conversion (ADC) and digital to analogue conversion (DAC). In practice, it is convenient to specify loudness ratings to the Air Interface. For the normal case, where the 3G, LTE, NR or WLAN network introduces no additional loss between the Air Interface and the POI, the loudness ratings to the PSTN boundary (POI) will be the same as the loudness ratings measured at the Air Interface. However, in some cases loss adjustment may be needed for interworking situations in individual countries.

7.2.2 Connections with handset UE

The nominal values of SLR/RLR to the POI shall be:

$$\text{SLR} = 8 \pm 3 \text{ dB};$$

$$\text{RLR} = 2 \pm 3 \text{ dB}.$$

Where a user-controlled receiving volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. When the control is set to maximum, the RLR shall not be \leq (equal or louder than) -13 dB and shall not be \geq (equal or quieter than) -3 dB.

With the volume control set to the minimum position the RLR shall not be \geq (equal or quieter than) 18 dB.

Compliance shall be checked by the relevant tests described in TS 26.132.

7.2.2a Connections with handset UE in the presence of background noise

In the presence of background noise, the RLR at maximum volume control shall not be \leq (equal or louder than) -13 dB.

Compliance shall be checked by the relevant tests described in TS 26.132.

7.2.3 Connections with desktop and vehicle-mounted hands-free UE

The nominal values of SLR/RLR to/from the POI shall be:

$$\text{SLR} = 13 \pm 4 \text{ dB};$$

$$\text{RLR} = 2 \pm 4 \text{ dB (for vehicle-mounted hands-free UE);}$$

$$\text{RLR} = 5 \pm 4 \text{ dB (for desktop hands-free UE).}$$

1. For a vehicle-mounted hands-free UE:

Where a user-controlled volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. It is recommended that a volume control giving at least 15 dB increase from the nominal RLR (louder) is provided for hands-free units intended to work in the vehicle environment. This is to allow for the increased acoustic noise level in a moving vehicle.

RLR at the maximum volume control setting should be \leq (equal or louder than) -2 dB.

2. For a desktop hands-free UE:

Where a user-controlled volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. It is recommended that a volume control giving at least 15 dB increase from the nominal RLR (louder) is provided for hands-free units. This is to allow for increased acoustic noise level in the usage environment.

RLR at the maximum volume control setting should be \leq (equal or louder than) 1 dB.

Compliance shall be checked by the relevant tests described in TS 26.132.

NOTE: The target value for nominal RLR, as recommended in ITU-T G.111 Annex B – Table B.1 [4], lies between 1 and 3 dB. The higher RLR requirement of 5 dB for desktop hands-free is appreciative of the limitations in transducer output with current typical form factors.

7.2.4 Connections with hand-held hands-free UE

The nominal values of SLR/RLR to/from the POI shall be:

$$\text{SLR} = 13 \pm 4 \text{ dB};$$

$$\text{RLR} = 9 \text{ +9/-7 dB}.$$

Where a user-controlled volume control is provided, the RLR shall meet the nominal value for at least one setting of the control.

The value of RLR at the maximum volume control shall be \leq (equal or louder than) 12 dB. As a performance objective it is recommended that the RLR at the maximum volume control setting is \leq (equal or louder than) 2 dB.

Where a user-controlled volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. It is recommended that a volume control range ≥ 15 dB be provided.

Compliance shall be checked by the relevant tests described in TS 26.132.

7.2.5 Connections with headset UE

The SLR and RLR should be measured and computed using methods given in ITU-T Recommendation P.380 [9]. This Recommendation currently gives a measuring technique for supra-aural earphone and insert type receivers. Study is continuing on other types of ear-pieces in ITU-T Study Group 12.

The nominal values of SLR/RLR to/from the POI shall be:

$$\text{SLR} = 8 \pm 3 \text{ dB};$$

$$\text{RLR} = 2 \pm 3 \text{ dB};$$

$$\text{RLR (binaural headset)} = 8 \pm 3 \text{ dB for each earphone}.$$

Where a user-controlled receiving volume control is provided, the RLR shall meet the nominal value for at least one setting of the control. When the control is set to maximum, the RLR shall not be \leq (equal or louder than) -13 dB.

With the volume control set to the minimum position the RLR shall not be \geq (equal or quieter than) 18 dB and shall not be \geq (equal or quieter than) 24 dB for a binaural headset.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

7.2.5a Connections with headset UE in the presence of background noise

In the presence of background noise, the RLR at maximum volume control shall not be \leq (equal or louder than) -13 dB.

Compliance shall be checked by the relevant tests described in TS 26.132.

7.2.6 Connections with electrical interface UE

7.2.6.1 Analogue connection

The nominal values of SJLR/RJLR to/from the POI shall be:

$$\text{SJLR} = 0 \pm 3 \text{ dB};$$

$$\text{RJLR} = 0 \pm 3 \text{ dB};$$

Where a user-controlled receiving volume control is provided, the RJLR shall meet the nominal value for at least one setting of the control. When the control is set to maximum, the RJLR shall not be \leq (equal or louder than) -15 dB.

With the volume control set to the minimum position the RJLR shall not be \geq (equal or quieter than) 16 dB.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

7.2.6.2 Digital connection

The nominal values of SJLR/RJLR to/from the POI shall be:

$$\text{SJLR} = 0 \pm 3 \text{ dB};$$

$$\text{RJLR} = 0 \pm 3 \text{ dB};$$

Requirements with different volume settings (other than nominal) are not applicable.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

7.3 Idle channel noise (handset, headset UE, and electrical interface UE)

7.3.1 Sending (handset and headset UE)

The maximum noise level produced by the apparatus at the output of the SS under silent conditions in the sending direction shall not exceed -64 dBm0(A).

NOTE 1: This level includes the eventual noise contribution of an acoustic echo canceller under the condition that no signal is received.

NOTE 2: This figure applies to the total noise level with A-weighting. It is recommended that the level of single frequency disturbances should be ≤ -74 dBm0(A) in the frequency range from 100 Hz to 16 kHz.

Compliance shall be checked by the relevant test described in TS 26.132.

7.3.2 Receiving (handset and headset UE)

The maximum (acoustic) noise level at the handset and headset UE when no signal is transmitted to the input of the SS shall be as follows:

- If no user-controlled receiving volume control is provided, or, if it is provided, at the setting of the user-controlled receiving volume control at which the RLR is equal to the nominal value, the noise measured at the DRP with diffuse-field correction contributed by the receiving equipment alone shall not exceed -57 dBPa(A).
- Where a volume control is provided, the measured noise shall be ≤ -54 dBPa(A) at the maximum setting of the volume control.

For the nominal volume control setting, the level of single frequency disturbances shall be ≤ -60 dBPa(A) in the frequency range from 100 Hz to 16 kHz. As a performance objective it is recommended that the level should be ≤ -64 dBPa(A).

NOTE: In a connection with the PSTN, noise conditions as described in ITU-T Recommendation G.103 [3] can be expected at the input (POI) of the 3G, LTE, NR or WLAN network. The characteristics of this noise may be influenced by the speech transcoding process (for further study).

Compliance shall be checked by the relevant test described in TS 26.132.

7.3.3 Sending (electrical interface UE)

The maximum noise level produced by the apparatus at the output of the SS under silent conditions in the sending direction shall be ≤ -64 dBm0(A).

NOTE 1: This level includes the eventual noise contribution of an acoustic echo canceller under the condition that no signal is received.

NOTE 2: This figure applies to the total noise level with A-weighting. It is recommended that the level of single frequency disturbances should be ≤ -74 dBm0(A) in the frequency range from 100 Hz to 16 kHz.

Compliance shall be checked by the relevant test described in TS 26.132.

7.3.4 Receiving (electrical interface UE)

The maximum A-weighted noise level when no signal is applied to the input of the SS shall be as follows:

- If no user-controlled receiving volume control is provided, or, if it is provided, at the setting of the user-controlled receiving volume control at which the RJLR is equal to the nominal value, the noise measured at the receive output of the electrical reference interface contributed by the receiving equipment alone shall not exceed -87 dBV(A) for analogue and -64 dBm0(A) for digital connections.
- Where a volume control is provided, the measured noise shall be \leq -84 dBV(A) for analogue connection at the maximum setting of the volume control.

For the nominal volume control setting, the level of single frequency disturbances shall be \leq -90 dBV(A) for analogue and -67 dBm0(A) for digital connections in the frequency range from 100 Hz to 16 kHz. As a performance objective it is recommended that the level should be \leq -94 dBV(A) for analogue and -71 dBm0(A) for digital connections.

NOTE: In a connection with the PSTN, noise conditions as described in ITU-T Recommendation G.103 [3] can be expected at the input (POI) of the 3G, LTE, NR or WLAN network. The characteristics of this noise may be influenced by the speech transcoding process (for further study).

Compliance shall be checked by the relevant test described in TS 26.132.

7.4 Sensitivity/frequency characteristics

7.4.0 General

It is recommended for all configurations (handset, headset etc) to have a flat sending frequency response in super-wideband mode.

Tolerance masks apply to the center frequencies of the fractional octave bands specified for the respective tests in TS 26.132.

7.4.1 Handset and headset UE sending

The sensitivity/frequency characteristics shall be as follows:

The sending sensitivity frequency response, measured either from the mouth reference point (MRP) to the digital interface or from the MRP to the SS audio output (digital output of the reference speech decoder of the SS), shall be within a mask, which can be drawn between the points given in table 17.

The masks are drawn with straight lines between the breaking points in the tables on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 17: Handset and headset sending sensitivity/frequency requirement mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	4	
200	4	-4
5000	4	-4
12500	4	-6
16000	4	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

Table 18: Void

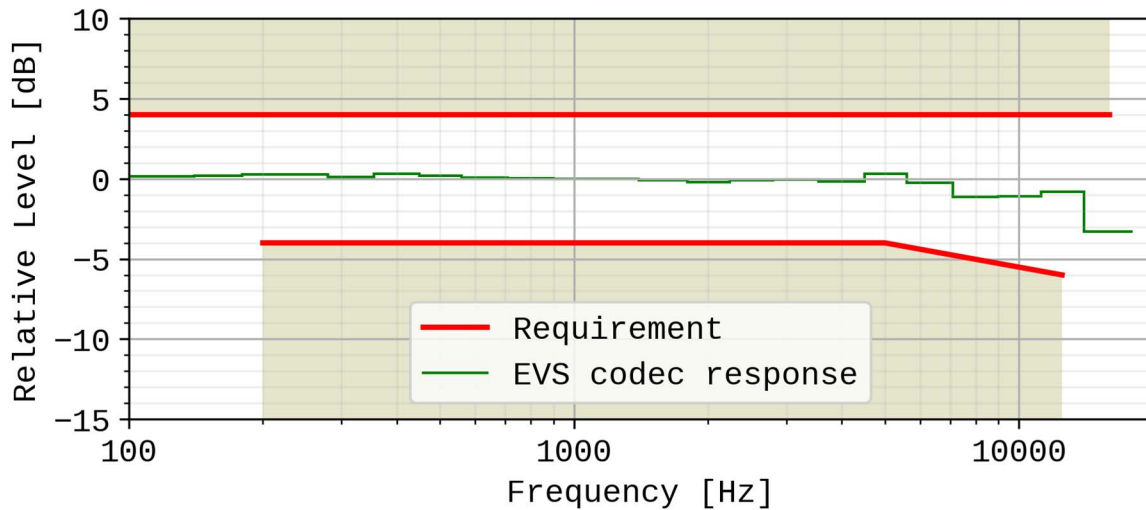


Figure 15: Handset and headset sending sensitivity/frequency masks. The frequency response of the EVS codec operating as specified in TS 26.132 (super-wideband 24,4kbit/s, using the specified P.501 speech test signal), is plotted for reference, normalized to 0dB at 1kHz.

A UE operating in super-wideband mode shall pass the super-wideband requirements (i.e. when measured according to in 1/3rd octaves) as specified in Table 17, and shall also pass the wideband sensitivity/frequency characteristics requirements in the wideband range using the wideband measurement (i.e. measured in 1/12th octaves) as specified in Table 9.

Compliance shall be checked by the relevant test described in TS 26.132.

7.4.2 Handset and headset UE receiving

7.4.2.1 Handset UE receiving

The sensitivity/frequency characteristics shall be as follows:

The receiving sensitivity frequency response, measured either from the digital interface to the DRP with diffuse-field correction or from the SS audio input (analogue or digital input of the reference speech encoder of the SS) to the DRP with diffuse-field correction, shall be within a mask, which can be drawn with straight lines between the breaking points in table 19 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 19: Handset receiving sensitivity/frequency requirement mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	5	
200	5	-8
250	5	-5
5000	5	-5
12500	5	-11
16000	5	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

It is desired as a performance objective that the receiving sensitivity/frequency response be within the mask which can be drawn with straight lines between the breaking points in table 20.

Table 20: Handset receiving sensitivity/frequency performance objective mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	4	
200	4	-4
250	4	-4
5000	4	-4
12500	4	-7
16000	4	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

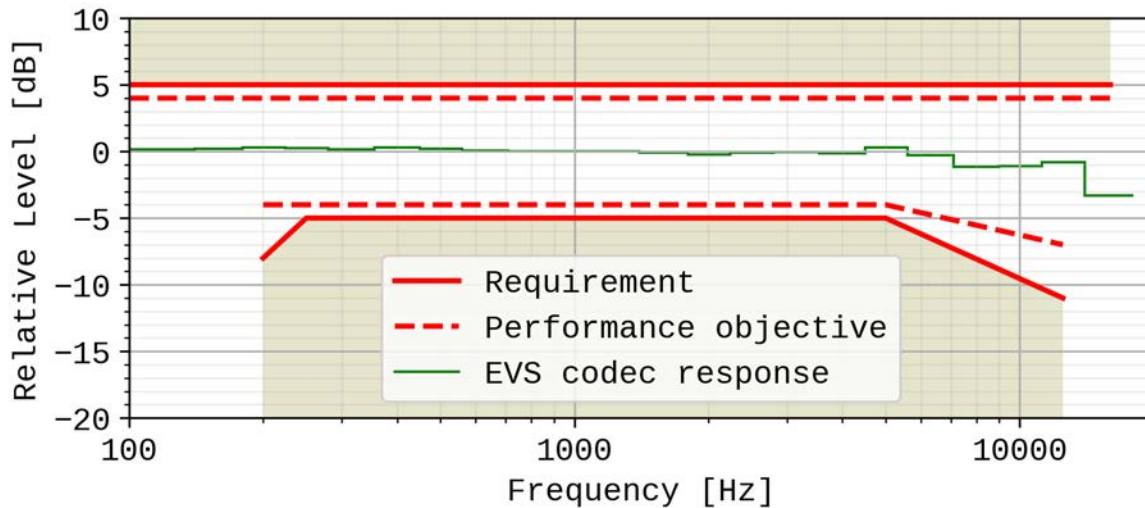


Figure 16: Handset receiving sensitivity/frequency masks. The frequency response of the EVS codec operating as specified in TS 26.132 (super-wideband 24,4kbit/s, using the specified P.501 speech test signal), is plotted for reference, normalized to 0dB at 1kHz.

A UE operating in super-wideband mode shall pass the super-wideband requirements (i.e. when measured according to in 1/3rd octaves) as specified in Table 19, and shall also pass the wideband sensitivity/frequency characteristics requirements in the wideband range using the wideband measurement (i.e. measured in 1/12th octaves) as specified in Table 10.

Compliance shall be checked by the relevant test described in TS 26.132.

7.4.2.2 Headset UE receiving

The sensitivity/frequency characteristics shall be as follows:

The receiving sensitivity frequency response, measured either from the digital interface to the DRP with diffuse-field correction or from the SS audio input (analogue or digital input of the reference speech encoder of the SS) to the DRP with diffuse-field correction, shall be within a mask, which can be drawn with straight lines between the breaking points in table 21 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 21: Headset receiving sensitivity/frequency requirement mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	[TBD]	[TBD]
200		
250		
5000		
12500		
16000		

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

It is recommended as a performance objective that the receiving sensitivity/frequency response be within the mask which can be drawn with straight lines between the breaking points in table 22.

Table 22: Headset receiving sensitivity/frequency performance objective mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	[3]	
200	[3]	[-6]
250	[3]	[-3]
5000	[3]	[-3]
12500	[3]	[-6]
16000	[3]	

NOTE 1: All sensitivity values are expressed in dB on an arbitrary scale.
NOTE 2: Values within [] are provisional and expected to be confirmed, revised or removed based on future studies.

TBD

Figure 17: Headset receiving sensitivity/frequency masks

Compliance shall be checked by the relevant test described in TS 26.132.

7.4.3 Desktop and vehicle-mounted hands-free UE sending

The sending sensitivity frequency response from the MRP to the SS audio output (digital output of the reference speech decoder of the SS) shall be as follows:

The sending sensitivity frequency response shall be within the mask which can be drawn with straight lines between the breaking points in table 23 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 23: Desktop and vehicle-mounted hands-free sending sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	[3...5]	
200	[3...5]	[-3...-5]
5000	[3...5]	[-3...-5]
12500	[3...5]	[-5...-7]
16000	[3...5]	

NOTE 1: All sensitivity values are expressed in dB on an arbitrary scale.
NOTE 2: Values within [] are provisional and expected to be defined as single values based on future studies.

It is recommended as a performance objective that the sending sensitivity/frequency response be within the mask which can be drawn with straight lines between the breaking points in table 24.

Table 24: Handset and headset sending sensitivity/frequency performance objective mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	[3]	
200	[3]	[-3]
5000	[3]	[-3]
12500	[3]	[-5]
16000	[3]	

NOTE 1: All sensitivity values are expressed in dB on an arbitrary scale.
NOTE 2: Values within [] are provisional and expected to be confirmed, revised or removed based on future studies.

TBD

Figure 18: Desktop and vehicle-mounted hands-free sending sensitivity/frequency masks

Compliance shall be checked by the relevant test described in TS 26.132.

7.4.4 Desktop and vehicle-mounted hands-free UE receiving

The receiving sensitivity frequency response from the SS audio input (analogue or digital input of the reference speech encoder of the SS) to the free-field shall be as follows:

The receiving sensitivity frequency response shall be within the mask which can be drawn with straight lines between the breaking points in table 25 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 25: Desktop and vehicle-mounted hands-free receiving sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
TBD	TBD	TBD
NOTE: The limits for intermediate frequencies lie on a straight line drawn between the given values on a linear (dB) - logarithmic (Hz) scale. All sensitivity values are expressed in dB on an arbitrary scale.		

It is recommended as a performance objective that the receiving sensitivity frequency response be within the mask which can be drawn with straight lines between the breaking points in table 26 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 26: Performance objective for desktop and vehicle-mounted hands-free receiving sensitivity/frequency response

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
TBD	TBD	TBD

TBD

Figure 19: Desktop and vehicle-mounted hands-free receiving sensitivity/frequency masks

Compliance shall be checked by the relevant test described in TS 26.132.

7.4.5 Hand-held hands-free UE sending

The sending sensitivity frequency response from the MRP to the SS audio output (digital output of the reference speech decoder of the SS) shall be as follows:

The sending sensitivity frequency response shall be within the mask which can be drawn with straight lines between the breaking points in table 27 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 27: Hand-held hands-free sending sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	[3...5]	
200	[3...5]	[-3...-5]
5000	[3...5]	[-3...-5]
12500	[3...5]	[-5...-7]
16000	[3...5]	
NOTE 1: All sensitivity values are expressed in dB on an arbitrary scale.		
NOTE 2: Values within [] are provisional and expected to be defined as single values based on future studies.		

It is recommended as a performance objective that the sending sensitivity/frequency response be within the mask which can be drawn with straight lines between the breaking points in table 28.

Table 28: Hand-held hands-free sending sensitivity/frequency performance objective mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
100	[3]	
200	[3]	[-3]
5000	[3]	[-3]
12500	[3]	[-5]
16000	[3]	
NOTE 1: All sensitivity values are expressed in dB on an arbitrary scale.		
NOTE 2: Values within [] are provisional and expected to be confirmed, revised, or removed, based on future studies.		

TBD

Figure 20: Hand-held hands-free sending sensitivity/frequency masks

Compliance shall be checked by the relevant test described in TS 26.132.

7.4.6 Hand-held hands-free UE receiving

The receiving sensitivity frequency response from the SS audio input (analogue or digital input of the reference speech encoder of the SS) to the free-field shall be as follows:

The receiving sensitivity frequency response shall be within the mask which can be drawn with straight lines between the breaking points in table 29 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 29: Hand-held hands-free receiving sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
TBD	TBD	TBD
NOTE: All sensitivity values are expressed in dB on an arbitrary scale.		

TBD

It is recommended as a performance requirement that the receiving sensitivity frequency response be within the mask which can be drawn with straight lines between the breaking points in table 30 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 30: Performance objective for hand-held hands-free receiving sensitivity/frequency mask

Frequency (Hz)	Upper limit (dB)	Lower limit (dB)
TBD	TBD	TBD

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

TBD

Figure 21: Hand-held hands-free receiving sensitivity/frequency masks

Compliance shall be checked by the relevant test described in TS 26.132.

7.4.7 Electrical interface UE sending

The sensitivity/frequency characteristics shall be as follows:

The sending sensitivity frequency response measured at the electrical reference point shall be within a mask, which can be drawn between the points given in table 30a1.

The masks are drawn with straight lines between the breaking points in the tables on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 30a1: Handset and headset sending sensitivity/frequency requirement mask

Frequency (Hz)	Upper limit	Lower limit
100	1	[-8]
200	1	-5
1000	1	-5
3000	6	-3
5000	8	-3
12500	8	-3
16000	8	

NOTE 1: All sensitivity values are expressed in dB on an arbitrary scale.
 NOTE 2: The limit in bracket in the table is enforced but is under evaluation.

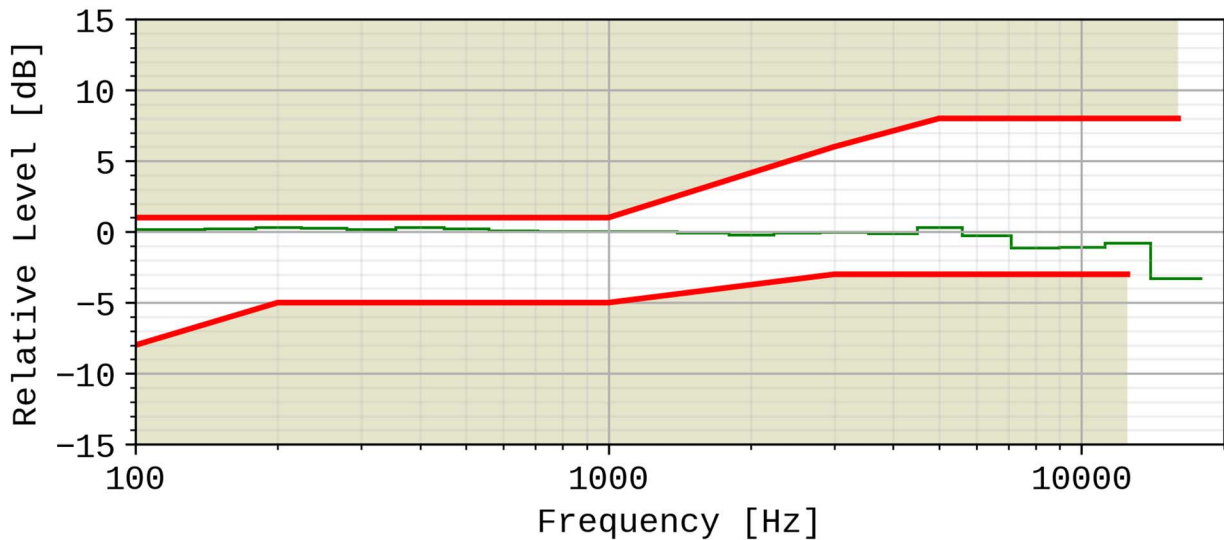


Figure 16a: Electrical interface sending sensitivity/frequency masks. The frequency response of the EVS codec operating as specified in TS 26.132 (super-wideband 24,4kbit/s, using the specified P.501 speech test signal), is plotted for reference, normalized to 0dB at 1kHz.

A UE operating in super-wideband mode shall pass the super-wideband requirements (i.e. when measured according to in 1/3rd octaves) as specified in Table 30a1, and shall also pass the wideband sensitivity/frequency characteristics requirements in the wideband range using the wideband measurement (i.e. measured in 1/12th octaves) as specified in Table 14a1.

Compliance shall be checked by the relevant test described in TS 26.132.

7.4.8 Electrical interface UE receiving

The sensitivity/frequency characteristics shall be as follows:

The receiving sensitivity frequency response measured at the electrical reference point shall be within a mask, which can be drawn with straight lines between the breaking points in table 30a2 on a logarithmic (frequency) - linear (dB sensitivity) scale.

Table 30a2: Handset receiving sensitivity/frequency requirement mask

Frequency (Hz)	Upper limit	Lower limit
100	2	-10
200	2	-7
1000	2	-2
3000	2	-2
5000	2	-2
8000	2	-3
12500	2	-6
16000	2	

NOTE: All sensitivity values are expressed in dB on an arbitrary scale.

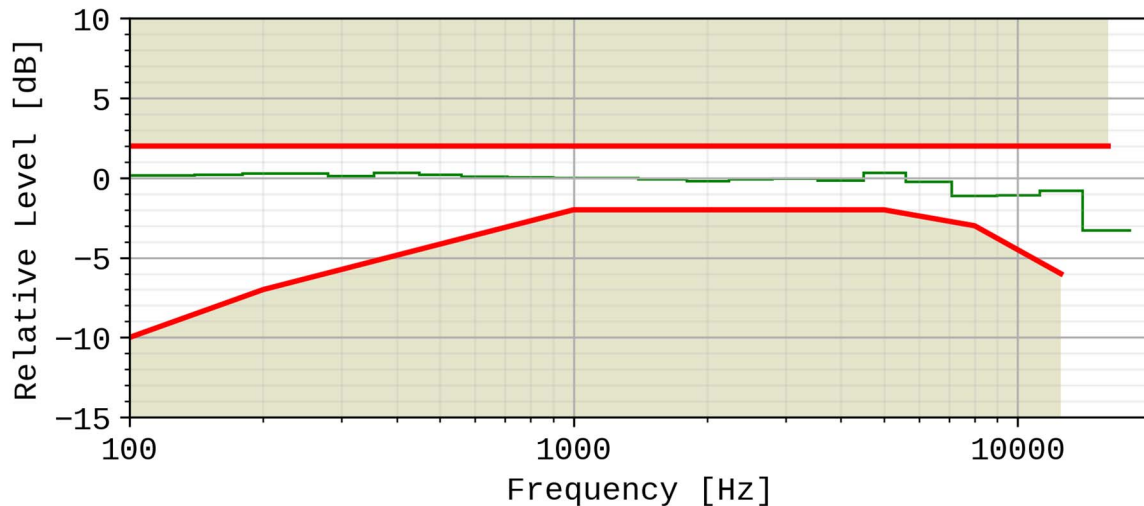


Figure 16b: Electrical interface sensitivity/frequency masks. The frequency response of the EVS codec operating as specified in TS 26.132 (super-wideband 24,4kbit/s, using the specified P.501 speech test signal), is plotted for reference, normalized to 0dB at 1kHz.

A UE operating in super-wideband mode shall pass the super-wideband requirements (i.e. when measured according to in 1/3rd octaves) as specified in Table 30a2, and shall also pass the wideband sensitivity/frequency characteristics requirements in the wideband range using the wideband measurement (i.e. measured in 1/12th octaves) as specified in Table 14a2.

Compliance shall be checked by the relevant test described in TS 26.132.

7.5 Sidetone characteristics (handset, headset, and analogue electrical interface UE)

7.5.1 Sidetone loss

The talker sidetone masking rating (STMR) shall be ≥ 15 dB and should be ≤ 23 dB for the nominal setting of the volume control. For all other positions of the volume control, the STMR shall be ≥ 10 dB.

In case the STMR is below the lower limit also when the electrical sidetone path has been disabled, the result shall not be regarded as a failure.

Compliance shall be checked by the relevant test described in TS 26.132.

NOTE 1: Where a user-controlled receiving volume control is provided, it is recommended that the sidetone loss is independent of the volume control setting.

NOTE 2: In general, it is recommended to provide a terminal sidetone path for handset and headset UEs.

NOTE 3: In case the human air-conducted sidetone paths are obstructed (one example being some binaural insert type headset UEs), it is important to provide a terminal sidetone path.

NOTE 4: The STMR calculation algorithm being used was developed for quantifying the audibility of the electrical sidetone path using a sealed coupler. The air-conducted path was not intended to be included in the test setup. A lower STMR limit was specified to avoid annoying effects (e.g. howling, increase of ambient noise level in the ear) of an excessive electrical sidetone. In HATS-based measurements, the air-conducted path cannot be avoided in the test setup. With some UE form factors the air-conducted path can be substantial resulting in low STMR figures also when there are no annoying effects from any excessive electrical sidetone. See ITU-T Recommendation P.76 for definitions of sidetone paths.

7.5.2 Sidetone delay

The maximum sidetone delay shall be ≤ 5 ms, measured in an echo-free setup.

NOTE: The measured result is only applicable where the level of the electrical sidetone is sufficiently high to be measured. While the STMR value may indicate the presence of sidetone it should be ensured that this is not primarily due to the acoustical or mechanical sidetone path when interpreting sidetone delay results.

Compliance shall be checked by the relevant test described in TS 26.132.

7.6 Stability loss

The stability loss presented to the PSTN by the 3G, LTE, NR or WLAN network at the POI should meet the principles of the requirements in clauses 2 and 3 of ITU-T Recommendation G.122 [6]. These requirements will be met if the attenuation between the digital input and digital output at the POI is ≥ 6 dB at all frequencies in the range 100 Hz to 16 kHz under the worst case acoustic conditions at the UE (any acoustic echo control should be enabled). For the normal case of digital connection between the Air Interface and the POI, the stability requirement can be applied at the Air Interface.

The worst case acoustic conditions will be as follows (with volume control set to maximum for each following condition):

Handset UE: the handset lying on, and the transducers facing, a hard surface with the ear-piece uncapped;

Headset UE: for further study;

Hands-free UE: no requirement other than echo loss.

NOTE: The test procedure must take into account the switching effects of echo control and discontinuous transmission (DTX) if applicable.

7.7 Echo control

7.7.1 General

The echo loss (EL) presented by the 3G, LTE, NR or WLAN network at the POI should be sufficient during single-talk. This takes into account the fact that the UE is likely to be used in connections with high transmission delay and in a wide range of noise environments.

The use of acoustic echo control is not mandated for 3G, LTE, NR or WLAN networks and the connection between the UE and the POI is zero loss. Therefore the acoustic echo control provided in the UE should provide a sufficient TCLw at the POI over the likely range of acoustic end delays.

If acoustic echo control is provided by voice switching, comfort noise should be injected. This comfort noise shall operate in the same way as that used in DTX.

7.7.2 Acoustic echo control in desktop and vehicle-mounted hands-free UE

The TCLw for the desktop and vehicle-mounted hands-free UE shall be ≥ 40 dB for any setting of the volume control.

The TCLw for the desktop hands-free and vehicle-mounted hands-free UE shall be ≥ 46 dB when measured under free-field conditions at the nominal setting of the volume control.

NOTE: A TCLw for desktop hands-free and vehicle-mounted hands-free UE of ≥ 55 dB is recommended as a performance objective when measured under free-field conditions at the nominal setting of the volume control. Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

The echo canceller should be designed to cope with the expected reverberation and dispersion. In the case of the hands-free UE, this reverberation and dispersion may be time variant. Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

7.7.3 Acoustic echo control in hand-held hands-free UE

The TCLw for hand-held hands-free UE shall be ≥ 40 dB for any setting of the volume control.

The TCLw for hand-held hands-free UE shall be ≥ 46 dB at the nominal setting of the volume control.

NOTE: A TCLw for the hand-held hands-free UE of ≥ 55 dB is recommended as a performance objective when measured under free-field conditions at the nominal setting of the volume control. Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

The echo canceller should be designed to cope with the expected reverberation and dispersion. In the case of the hands-free UE, this reverberation and dispersion may be time variant. Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

7.7.4 Acoustic echo control in a handset UE

The TCLw for handset UE shall be ≥ 46 dB for any setting of the volume control.

The TCLw for handset UE should be ≥ 55 dB at the nominal setting of the volume control.

With the volume control set to maximum TCLw should be ≥ 55 dB.

It is recommended that the volume control should be set back to nominal after each call unless TCLw ≥ 55 dB can also be maintained with the maximum volume setting.

NOTE. Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

The echo canceller should be capable of dealing with the variations in handset positions when in normal use. The implications of this are under study.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

7.7.5 Acoustic echo control in a headset UE

The TCLw for headset UE shall be ≥ 46 dB for any setting of the volume control.

The TCLw for headset UE shall be ≥ 55 dB at the nominal setting of the volume control.

The volume control shall be set back to nominal after each call unless a TCLw ≥ 55 dB can also be maintained with the maximum volume setting.

NOTE: Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

Due to the obstacle effect of the head in this type of terminal, careful design might mean that no active echo control is necessary.

The echo cancellation algorithm should be designed to cope with the expected reverberation and dispersion.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

7.7.6 Echo control in an electrical interface UE

The TCLw for electrical interface UE shall be ≥ 46 dB for any setting of the volume control.

The TCLw for electrical interface UE shall be ≥ 55 dB at the nominal setting of the volume control.

The volume control shall be set back to nominal after each call unless a TCLw ≥ 55 dB can also be maintained with the maximum volume setting.

NOTE: Depending on the UE idle channel noise in the sending direction, it may not always be possible to measure an echo loss ≥ 55 dB.

The echo cancellation algorithm should be designed to cope with the expected reverberation and dispersion.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

7.8 Distortion

7.8.1 Sending distortion (excluding electrical interface UE)

The sending part shall meet the following distortion requirements:

NOTE 1: Digital signal processing other than the transcoder itself is included in this requirement (e.g., echo cancelling).

Distortion shall be measured between the MRP and the SS audio output (output of the reference speech decoder of the SS). The ratio of signal-to-total distortion power measured with the proper noise weighting (see table 4 of ITU-T Recommendation G.223) shall be above the limits given in table 31.

NOTE 2: Frequencies from 315 Hz to 816 Hz do not apply to the hands-free UE case, but only to handset and headset UE.

Table 31: Limits for signal-to-total distortion ratio

Frequency (Hz)	Sending level (dBPa at the MRP)	Sending Ratio (dB)
315	-4,7	28
408	-4,7	32
510	-4,7	32
816	-4,7	32
1 020	5	30
	0	35
	-4,7	35
	-10	33
	-15	30
	-20	27

Limits for intermediate levels are found by drawing straight lines between the breaking points in table 31 on a linear (dB signal level) - linear (dB ratio) scale.

Compliance of the sending distortion shall be checked by the test described in TS 26.132.

NOTE 3: It should be ensured that the test signal is treated by speech processing algorithms as a speech-like signal, and not a noise-like signal. Test signals with a time-stationary envelope may be treated by certain algorithms, e.g., noise suppression algorithms defined in 3GPP TS 06.77 R99 [16], as a noise-like signal. If speech processing algorithms, including but not limited to noise suppression algorithms, are shown to treat the test signal as a noise-like signal, even where an activation signal has been utilized, then the test should be repeated with said speech processing algorithms disabled. The results of both sets of tests and the state of the processing algorithms should be documented in the test report.

7.8.2 Receiving (excluding electrical interface UE)

The receiving part between the SS audio input (input of the reference speech encoder of the SS) and the applicable acoustic measurement point (DRP with diffuse-field correction for handset and headset modes; free field correction for hands-free modes) shall meet the requirements in this sub-clause at the nominal setting of the volume control (except where another volume setting is specified):

The ratio of signal-to-total distortion power measured with the proper noise weighting (see table 4 of ITU-T Recommendation G.223) shall be above the limits given in table 32 when the sound pressure at the applicable acoustic measurement point is < 10 dBPa. For a sound pressure \geq 10 dBPa at the applicable acoustic measurement point there is no distortion requirement.

NOTE 1: Frequencies from 315 Hz to 816 Hz do not apply to the hands-free UE case, only to handset and headset UE.

Table 32: Limits for signal-to-total distortion ratio

Frequency (Hz)	Receiving level at the digital interface (dBm0)	Receiving ratio at nominal volume setting (dB)	Receiving ratio at maximum volume setting (dB)
315	-16	20	
408	-16	28	
510	-16	28	
816	-16	28	
1 020	0	25,5	tbd
	-3	31,5	tbd
	-10	33,5	tbd
	-16	33,5	tbd
	-20	33	tbd
	-30	30,5	tbd
	-40	22,5 (*)	tbd
-45	17,5 (*)	tbd	

NOTE: (*)For levels -40 and -45 dBm0 a lower signal-to-total distortion ratio may not be possible, and hence would not be regarded as a failing result. However, the obtained results would be reported.

Limits for intermediate levels are found by drawing straight lines between the breaking points in the table on a linear (dB signal level) - linear (dB ratio) scale.

Compliance of the receiving distortion shall be checked by the appropriate method in TS 26.132.

NOTE 2: It should be ensured that the test signal is treated by speech processing algorithms as a speech-like signal, and not a noise-like signal. Test signals with a time-stationary envelope may be treated by certain algorithms, e.g., noise suppression algorithms defined in 3GPP TS 06.77 R99 [16], as a noise-like signal.

7.8.3 Sending distortion (electrical interface UE)

The sending part shall meet the following distortion requirements:

NOTE 1: Digital signal processing other than the transcoder itself is included in this requirement (e.g., echo cancelling).

Distortion shall be measured between the MRP and the SS audio output (output of the reference speech decoder of the SS). The ratio of signal-to-total distortion power measured with the proper noise weighting (see table 4 of ITU-T Recommendation G.223) shall be above the limits given in table 32a1 for electrical interface UE with analogue connection and table 32a2 for electrical interface UE with digital connection.

Table 32a1: Limits for signal-to-total distortion ratio for analogue connection

Frequency (Hz)	Sending level (dBV at at the output of the electrical reference interface)	Sending Ratio (dB)
315	-60	28
408	-60	32
510	-60	32
816	-60	32
1 020	-50	30
	-55	35
	-60	35
	-65	33
	-70	30
	-75	27

Table 32a2: Limits for signal-to-total distortion ratio for digital connection

Frequency (Hz)	Sending level (dBm0 at the output of the electrical reference interface)	Sending Ratio (dB)
315	-16	28
408	-16	32
510	-16	32
816	-16	32
1 020	-6	30
	-11	35
	-16	35
	-21	33
	-26	30
	-31	27

Limits for intermediate levels are found by drawing straight lines between the breaking points in tables 32a1 and 32a2 on a linear (dB signal level) - linear (dB ratio) scale.

Compliance of the sending distortion shall be checked by the test described in TS 26.132.

NOTE 2: It should be ensured that the test signal is treated by speech processing algorithms as a speech-like signal, and not a noise-like signal. Test signals with a time-stationary envelope may be treated by certain algorithms, e.g., noise suppression algorithms defined in 3GPP TS 06.77 R99 [16], as a noise-like signal. If speech processing algorithms, including but not limited to noise suppression algorithms, are shown to treat the test signal as a noise-like signal, even where an activation signal has been utilized, then the test should be repeated with said speech processing algorithms disabled. The results of both sets of tests and the state of the processing algorithms should be documented in the test report.

7.8.4 Receiving distortion (electrical interface UE)

The receiving part between the SS audio input (input of the reference speech encoder of the SS) and applicable electric measurement point (input to the electrical reference interface) shall meet the requirements in this clause at the nominal setting of the volume control (except where another volume setting is specified):

The ratio of signal to total distortion power measured with the proper noise weighting (see table 4 of ITU-T Recommendation G.223) shall be above the limits given in table 32b.

NOTE 1: Frequencies from 315 Hz to 816 Hz do not apply to the hands-free UE case, only to handset and headset UE.

Table 32b: Limits for signal-to-total distortion ratio

Frequency (Hz)	Receiving level at the digital interface (dBm0)	Receiving ratio at nominal volume setting (dB)	Receiving ratio at maximum volume setting (dB)
315	-16	20	
408	-16	28	
510	-16	28	
816	-16	28	
1 020	0	25,5	tbd
	-3	31,2	tbd
	-10	33,5	tbd
	-16	33,5	tbd
	-20	33	tbd
	-30	30,5	tbd
	-40	22,5 (*)	tbd
-45	17,5 (*)	tbd	

NOTE: (*)For levels -40 and -45 dBm0 a lower signal-to-total distortion ratio may not be possible, and hence would not be regarded as a failing result. However, the obtained results would be reported.

Limits for intermediate levels are found by drawing straight lines between the breaking points in table 32b on a linear (dB signal level) - linear (dB ratio) scale.

Compliance of the receiving distortion shall be checked by the appropriate method in TS 26.132.

NOTE 2: It should be ensured that the test signal is treated by speech processing algorithms as a speech-like signal, and not a noise-like signal. Test signals with a time-stationary envelope may be treated by certain algorithms, e.g., noise suppression algorithms defined in 3GPP TS 06.77 R99 [16], as a noise-like signal.

7.9 Void

7.10 Sending performance in the presence of ambient noise

7.10.1 General

For sending, in handset mode, the UE shall reduce the ambient noise picked up by the microphone(s) without significantly degrading the quality of the speech signal.

7.10.2 Connections with handset UE

The UE shall comply with the following requirements:

S-MOS-LQO_{fb}

- The average of S-MOS-LQO_{fb} scores across all test conditions shall be ≥ 3.7
- As a performance objective, the average of the S-MOS-LQO_{fb} scores across all test conditions should be ≥ 3.9

N-MOS-LQO_{fb}

- The average of the N-MOS-LQO_{fb} scores across all test conditions shall be ≥ 2.7
- As a performance objective, the average of N-MOS-LQO_{fb} scores across all test conditions should be ≥ 3.3

G-MOS-LQO_{fb}

- No requirement.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

7.10.3 Connections with Handheld hands-free UE

It is recommended that the UE meets the following performance objectives:

S-MOS-LQO_{fb}

- The average of S-MOS-LQO_{fb} scores across all five test conditions should be ≥ 3.4

N-MOS-LQO_{fb}

- The average of N-MOS-LQO_{fb} scores across all test conditions should be ≥ 2.3

G-MOS-LQO_{fb}

- No performance objective.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

7.10.4 Connections with electrical interface UE

The UE shall comply with the following requirements:

S-MOS-LQOn

- The average of S-MOS-LQOn scores across all test conditions shall be ≥ 3.0
- As a performance objective, the average of the S-MOS-LQOn scores across all test conditions should be ≥ 3.5

N-MOS-LQOn

- The average of the N-MOS-LQOn scores across all test conditions shall be ≥ 2.3
- As a performance objective, the average of N-MOS-LQOn scores across all test conditions should be ≥ 3.0

G-MOS-LQOn

- No performance objective.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

7.11 Delay

7.11.0 UE delay definition

7.11.0.1 Acoustic interfaces

For MTSI-based speech with LTE, NR or WLAN access, the UE delays in the send and receive directions are defined for acoustic interfaces as:

- The UE delay in the send (uplink) direction is the delay between the first acoustic event at the MRP to the last bit of the corresponding speech frame at the UE antenna
- The UE delay in the receive (downlink) direction is the delay between the first bit of a speech frame at the UE antenna and the first acoustic event at the DRP corresponding to that speech frame.

NOTE: In order to harmonize UMTS and LTE delay definitions, the reference points for UMTS UE delay have been changed in Rel-12. Prior to Rel-12, the UE reference points for UMTS were implicitly defined by the compensation factors declared by system simulator vendors, i.e. half of the air interface delay was attributed to the UE, and the last acoustic event at DRP was used for the receive measurement instead of the first.

Considering 10ms for half of the transmission time in each direction of a UMTS call, a speech frame size of 20ms, a codec look-ahead of 5ms, and a difference between the first and the last acoustic event of 20 ms, the previous reference points took into account a UE implementation independent delay of $2 \times 10 \text{ms} + 25 \text{ms} + 20 \text{ms} = 65 \text{ms}$. The same UE delay remains in the new definition above, which attributes the full air interface delay to the UE but uses the first acoustic event at the DRP, instead of the last ($2 \times 20 \text{ms} + 25 \text{ms} + 0 \text{ms} = 65 \text{ms}$). Hence, the UMTS requirements with these new reference points remain the same.

7.11.0.2 Electrical interfaces

The UE delays in the send and receive directions are defined for electrical interfaces as:

- The UE delay in the send (uplink) direction is the delay between the first electrical event at the input of the electrical interface (analogue or wired digital connection) or first bit of a speech frame at the UE antenna of the wireless digital interface (wireless digital connection) to the last bit of the corresponding speech frame at the UE antenna
- The UE delay in the receive (downlink) direction is the delay between the first bit of a speech frame at the UE antenna and the first electrical event at the output of the electrical interface (analogue or wired digital connection) or first bit of a speech frame at the UE antenna of the wireless digital interface (wireless digital connection) corresponding to that speech frame.

7.11.1 Handset UE

It is in general desirable to minimize UE delays to ensure low enough end-to-end delays and hence a good conversational experience, guidance is found in ITU-T Recommendation G.114.

For MTSI-based speech-only with LTE, NR or WLAN access in error and jitter free conditions and EVS speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) should be $\leq 157 \text{ms}$. If this performance objective cannot be met, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 197 \text{ms}$.

For MTSI-based speech-only with LTE, NR or WLAN access in conditions with simulated packet arrival time variations and packet loss and EVS speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall be less than or equal to the delay requirements in Table 32a1, while meeting the speech quality targets defined.

NOTE: The UE delay requirements for MTSI-based speech-only with LTE, NR or WLAN access are derived from:

- A codec algorithmic delay of 32ms including speech frame buffering and encoder lookahead.
- An air interface transmission time of 1ms on receive and 1ms on the send direction.
- A budget allowance for a jitter buffer depth of 40ms for error and jitter free conditions and test conditions 0 and 1 of Table 32a1, and 80ms for test condition 2 and 3 of Table 32a1. This budget is also applied in Table 32b1 (when testing in EVS 13.2 kbit/s channel-aware mode).
- A budget allowance for vendor specific implementation of 83ms corresponding to the performance objective and 123ms corresponding to the required maximum UE send and receive delay.

Table 32a1: UE delay and speech quality requirements for LTE, NR and WLAN access

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 157\text{ms}$	$T_S + T_R \leq 197\text{ms}$	No requirement, reference score $MOS-LQO_{REF}$
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 157\text{ms}$	$T_S + T_R \leq 197\text{ms}$	$MOS-LQO_{TEST} \geq MOS-LQO_{REF} - 0.4$
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 197\text{ms}$	$T_S + T_R \leq 237\text{ms}$	$MOS-LQO_{TEST} \geq MOS-LQO_{REF} - 0.4$
3	dly_profile_40msDRX_22pct_BLER_e2e	$T_S + T_R \leq 197\text{ms}$	$T_S + T_R \leq 237\text{ms}$	$MOS-LQO_{TEST} \geq MOS-LQO_{REF} - 1.0$
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and initial BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. The delay profile for test condition 3 is theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and initial BLER in sending and receiving directions of 22%, with +/- 6ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1].				
NOTE 2: The purpose of this test is to provide a relative comparison of the objective speech quality between the reference and test conditions. This test is not to be construed as a method to evaluate the absolute objective speech quality of the device.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132. When tested in EVS 13.2kbit/s channel aware mode, the UE shall meet the additional requirements in Table 32b1:

Table 32b1: UE delay and speech quality requirements for LTE, NR and WLAN access when tested in EVS 13.2kbit/s channel aware mode

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 157\text{ms}$	$T_S + T_R \leq 197\text{ms}$	No requirement, reference score $MOS-LQO_{REF}$
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq [157]\text{ms}$	$T_S + T_R \leq 197\text{ms}$	$MOS-LQO_{TEST} \geq MOS-LQO_{REF} - 0.3$
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq [197]\text{ms}$	$T_S + T_R \leq 237\text{ms}$	$MOS-LQO_{TEST} \geq MOS-LQO_{REF} - 0.3$
3	dly_profile_40msDRX_22pct_BLER_e2e	$T_S + T_R \leq [197]\text{ms}$	$T_S + T_R \leq 237\text{ms}$	$MOS-LQO_{TEST} \geq MOS-LQO_{REF} - 0.5$
	NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and initial BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. The delay profiles for test condition 3 is theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and initial BLER in sending and receiving directions of 22%, with +/- 6ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1].			
	NOTE 2: The purpose of this test is to provide a relative comparison of the objective speech quality between the reference and test conditions. This test is not to be construed as a method to evaluate the absolute objective speech quality of the device.			

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

7.11.2 Headset UE

7.11.2.1 Wired headset

It is in general desirable to minimize UE delays to ensure low enough end-to-end delays and hence a good conversational experience, guidance is found in ITU-T Recommendation G.114.

For MTSI-based speech-only with LTE, NR or WLAN access in error and jitter free conditions and EVS speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) should be $\leq 157\text{ms}$. If this performance objective cannot be met, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 197\text{ms}$.

For MTSI-based speech-only with LTE, NR or WLAN access in conditions with simulated packet arrival time variations and packet loss and EVS speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall be less than or equal to the delay requirements in Table 32a2, while meeting the speech quality targets defined.

NOTE: The UE delay requirements for MTSI-based speech-only with LTE, NR or WLAN access are derived from:

- A codec algorithmic delay of 32ms including speech frame buffering and encoder lookahead.
- An air interface transmission time of 1ms on receive and 1ms on the send direction.
- A budget allowance for a jitter buffer depth of 40ms for error and jitter free conditions and test conditions 0 and 1 of Table 32a2, and 80ms for test condition 2 and 3 of Table 32a2. This budget is also applied in Table 32b2 (when testing in EVS 13.2 kbit/s channel-aware mode).
- A budget allowance for vendor specific implementation of 83ms corresponding to the performance objective and 123ms corresponding to the required maximum UE send and receive delay.

Table 32a2: UE delay and speech quality requirements for LTE, NR and WLAN access

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 157\text{ms}$	$T_S + T_R \leq 197\text{ms}$	No requirement, reference score $\text{MOS-LQO}_{\text{REF}}$
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 157\text{ms}$	$T_S + T_R \leq 197\text{ms}$	$\text{MOS-LQO}_{\text{TEST}} \geq \text{MOS-LQO}_{\text{REF}} - 0.4$
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 197\text{ms}$	$T_S + T_R \leq 237\text{ms}$	$\text{MOS-LQO}_{\text{TEST}} \geq \text{MOS-LQO}_{\text{REF}} - 0.4$
3	dly_profile_40msDRX_22pct_BLER_e2e	$T_S + T_R \leq 197\text{ms}$	$T_S + T_R \leq 237\text{ms}$	$\text{MOS-LQO}_{\text{TEST}} \geq \text{MOS-LQO}_{\text{REF}} - 1.0$
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and initial BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. The delay profile for test condition 3 is theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and initial BLER in sending and receiving directions of 22%, with +/- 6ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1].				
NOTE 2: The purpose of this test is to provide a relative comparison of the objective speech quality between the reference and test conditions. This test is not to be construed as a method to evaluate the absolute objective speech quality of the device.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132. When tested in EVS 13.2kbit/s channel aware mode, the UE shall meet the additional requirements in Table 32b2.

Table 32b2: UE delay and speech quality requirements for LTE, NR and WLAN access when tested in EVS 13.2kbit/s channel aware mode

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 157\text{ms}$	$T_S + T_R \leq 197\text{ms}$	No requirement, reference score $\text{MOS-LQO}_{\text{REF}}$
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 157\text{ms}$	$T_S + T_R \leq 197\text{ms}$	$\text{MOS-LQO}_{\text{TEST}} \geq \text{MOS-LQO}_{\text{REF}} - 0.3$
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 197\text{ms}$	$T_S + T_R \leq 237\text{ms}$	$\text{MOS-LQO}_{\text{TEST}} \geq \text{MOS-LQO}_{\text{REF}} - 0.3$
3	dly_profile_40msDRX_22pct_BLER_e2e	$T_S + T_R \leq 197\text{ms}$	$T_S + T_R \leq 237\text{ms}$	$\text{MOS-LQO}_{\text{TEST}} \geq \text{MOS-LQO}_{\text{REF}} - 0.5$
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and initial BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. The delay profiles for test condition 3 is theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and initial BLER in sending and receiving directions of 22%, with +/- 6ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1].				
NOTE 2: The purpose of this test is to provide a relative comparison of the objective speech quality between the reference and test conditions. This test is not to be construed as a method to evaluate the absolute objective speech quality of the device.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

7.11.2.2 Wireless headset

For further study.

7.11.3 Electrical interface UE

It is in general desirable to minimize UE delays to ensure low enough end-to-end delays and hence a good conversational experience, guidance is found in ITU-T Recommendation G.114.

The delay budget B_D to be considered in the performance requirements and objectives depends on the type of electrical interface UE and is given by Table 32c1.

Table 32c1: Delay budget for different types of electrical interface UE

Electrical interface type	B_D [ms]
Analogue	0
Wireless digital	20
Wired digital	20
NOTE: The delay for analogue to digital conversion (and vice versa) in the wired digital connection is considered to be part of the budget allowance for vendor specific implementation in the UE delay requirements.	

For MTSI-based speech-only with LTE, NR or WLAN access in error and jitter free conditions and EVS speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) should be $\leq 157 + B_D$ ms. If this performance objective cannot be met, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 197 + B_D$ ms.

For MTSI-based speech-only with LTE, NR or WLAN access in conditions with simulated packet arrival time variations and packet loss and EVS speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall be less than or equal to the delay requirements in Table 32c2, while meeting the speech quality targets defined.

NOTE1: The UE delay requirements for MTSI-based speech-only with LTE, NR or WLAN access are derived from:

- A codec algorithmic delay of 32ms including speech frame buffering and encoder lookahead.
- An air interface transmission time of 1ms on receive and 1ms on the send direction.
- A budget allowance for a jitter buffer depth of 40ms for error and jitter free conditions and test conditions 0 and 1 of Table 32c2, and 80ms for test condition 2 and 3 of Table 32c2. This budget is also applied in Table 32c3 (when testing in EVS 13.2 kbit/s channel-aware mode).
- A budget allowance for vendor specific implementation of 83ms corresponding to the performance objective and 123ms corresponding to the required maximum UE send and receive delay.

NOTE2: The delay for analogue to digital conversion (and vice versa) in the wired digital connection is considered to be part of the budget allowance for vendor specific implementation in the UE delay requirements.

Table 32c2: UE delay and speech quality requirements for LTE, NR and WLAN access

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 157 + B_D$ ms	$T_S + T_R \leq 197 + B_D$ ms	No requirement, reference score MOS-LQO _{REF}
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 157 + B_D$ ms	$T_S + T_R \leq 197 + B_D$ ms	MOS-LQO _{TEST} \geq MOS-LQO _{REF} - 0.4
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 197 + B_D$ ms	$T_S + T_R \leq 237 + B_D$ ms	MOS-LQO _{TEST} \geq MOS-LQO _{REF} - 0.4
3	dly_profile_40msDRX_22pct_BLER_e2e	$T_S + T_R \leq 197 + B_D$ ms	$T_S + T_R \leq 237 + B_D$ ms	MOS-LQO _{TEST} \geq MOS-LQO _{REF} - 1.0
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and initial BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. The delay profile for test condition 3 is theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and initial BLER in sending and receiving directions of 22%, with +/- 6ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1].				
NOTE 2: The purpose of this test is to provide a relative comparison of the objective speech quality between the reference and test conditions. This test is not to be construed as a method to evaluate the absolute objective speech quality of the device.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132. When tested in EVS 13.2kbit/s channel aware mode, the UE shall meet the additional requirements in Table 32c3.

Table 32c3: UE delay and speech quality requirements for LTE, NR and WLAN access when tested in EVS 13.2kbit/s channel aware mode

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 157 + B_D$ ms	$T_S + T_R \leq 197 + B_D$ ms	No requirement, reference score MOS-LQO _{REF}
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 157 + B_D$ ms	$T_S + T_R \leq 197 + B_D$ ms	MOS-LQO _{TEST} \geq MOS-LQO _{REF} - 0.3
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 197 + B_D$ ms	$T_S + T_R \leq 237 + B_D$ ms	MOS-LQO _{TEST} \geq MOS-LQO _{REF} - 0.3
3	dly_profile_40msDRX_22pct_BLER_e2e	$T_S + T_R \leq 197 + B_D$ ms	$T_S + T_R \leq 237 + B_D$ ms	MOS-LQO _{TEST} \geq MOS-LQO _{REF} - 0.5
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and initial BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. The delay profiles for test condition 3 is theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and initial BLER in sending and receiving directions of 22%, with +/- 6ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1].				
NOTE 2: The purpose of this test is to provide a relative comparison of the objective speech quality between the reference and test conditions. This test is not to be construed as a method to evaluate the absolute objective speech quality of the device.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

7.12 Echo control characteristics

Echo cancellation is commonly deployed in the UE to fulfil the Acoustic echo control requirements. Echo cancellers are complex devices of which the subjective performance is affected by several attributes. The main attribute is its ability to suppress echo. The process of suppressing the echo may introduce impairments to the near-end speech signal, mainly manifested as distortion or clipping of the near-end signal during simultaneous speech from both the far and near-end ("double-talk").

To characterise the echo control performance, the activity (in % of total time) and averaged level difference (in dB) of the duration of any level difference according to Figure 22 and Table 33 between the clean near-end signal and the send-signal shall be reported for "double-talk" as well as the far-end single talk periods adjacent to the "double-talk".

NOTE: The limits for specifying the categories in Figure 22 and Table 33 are provisional pending further analysis and validation.

NOTE: The categories in Figure 22 and Table 33 are labelled in a functional order and the subjective impression of the respective categories is for further study.

All percentage values and averaged level differences described in the relevant test of 3GPP TS 26.132 shall be reported.

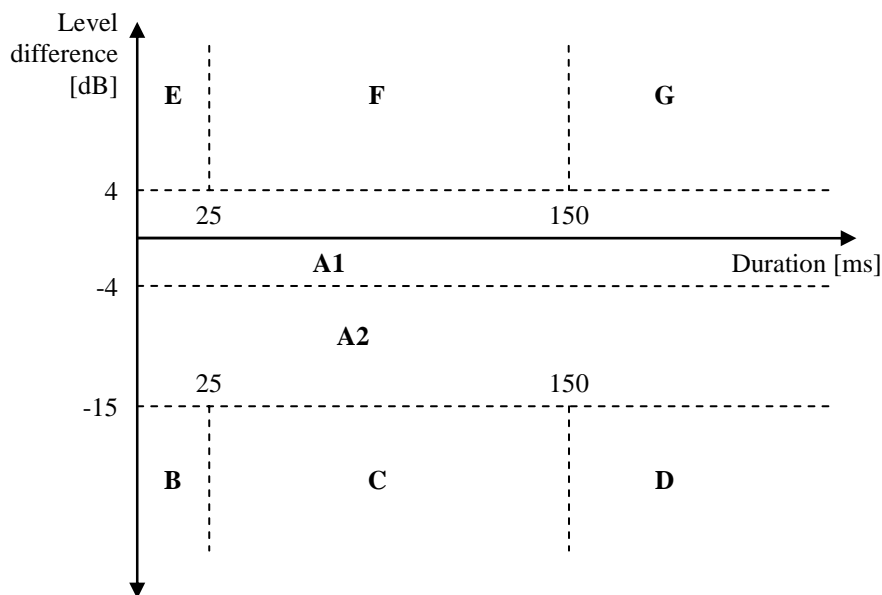


Figure 22: Classification of echo canceller performance

Table 33: Categories for echo canceller performance classification

Category	Description
A1	Full-duplex and full transparency
A2	Full-duplex with level loss in Tx
B	Very short clipping
C	Short clipping resulting in loss of syllables
D	Clipping resulting in loss of words
E	Very short residual echo
F	Echo bursts
G	Continuous echo

7.12.1 Handset

Requirements are for further study.

7.12.2 Headset

Requirements are for further study.

7.12.3 Handheld hands-free

Requirements are for further study.

7.12.4 Desktop and vehicle mounted hands-free

Requirements are for further study.

7.12.5 Electrical interface

Requirements are for further study.

7.13 Clock accuracy

For MTSI-based speech-only with LTE, NR or WLAN access, the clock skew in send direction between the device under test and the reference client should be less than 50 PPM (in absolute value) in error-free conditions.

Compliance shall be checked by the relevant test described in TS 26.132.

7.14 Jitter buffer management behaviour

For MTSI-based speech-only with LTE, NR or WLAN access, a jitter buffer is used in receiving to handle the variation in packet receiver timing (see clause 8 of TS 26.114 [17]).

If the jitter buffer management (JBM) behaviour is evaluated, the following statistics shall be reported for conditions specified in TS 26.132:

- Delay histogram (on a per sentence basis)
- Quality loss histogram (on a per sentence pair basis)

and all measured delay and quality loss values for these conditions shall be reported as a function of measurement time, together with minimum and maximum values.

The relevant test is described in 3GPP TS 26.132.

8 Fullband telephony transmission performance

8.1 Applicability

The performance requirements in this clause shall apply when UE is used to provide fullband telephony, either as a stand-alone service, or as part of a multimedia service. The requirements in the clause apply only when the far-end terminal is also providing fullband telephony. When a fullband-enabled terminal is providing narrowband telephony, the requirements in clause 5, 'narrowband telephony transmission performance' shall apply. When a fullband-enabled terminal is providing wideband telephony, the requirements in clause 6, 'Wideband telephony transmission performance' shall apply. When a fullband-enabled terminal is providing super-wideband telephony, the requirements in clause 7, 'Super-wideband telephony transmission performance' shall apply.

8.2 Overall loss/loudness ratings

8.2.1 General

See requirements for super-wideband.

8.2.2 Connections with handset UE

See requirements for super-wideband.

Compliance shall be checked by the relevant tests described in TS 26.132.

8.2.2a Connections with handset UE in the presence of background noise

See requirements for super-wideband.

Compliance shall be checked by the relevant tests described in TS 26.132.

8.2.3 Connections with desktop and vehicle-mounted hands-free UE

See requirements for super-wideband.

Compliance shall be checked by the relevant tests described in TS 26.132.

8.2.4 Connections with hand-held hands-free UE

See requirements for super-wideband.

Compliance shall be checked by the relevant tests described in TS 26.132.

8.2.5 Connections with headset UE

See requirements for super-wideband.

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

8.2.5a Connections with headset UE in the presence of background noise

See requirements for super-wideband.

Compliance shall be checked by the relevant tests described in TS 26.132.

8.2.6 Connections with electrical interface UE

See requirements for super-wideband.

Compliance shall be checked by the relevant tests described in TS 26.132.

8.3 Idle channel noise (handset, headset UE, and electrical interface UE)

8.3.1 Sending (handset and headset UE)

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.3.2 Receiving (handset and headset UE)

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.3.3 Sending (electrical interface UE)

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.3.4 Receiving (electrical interface UE)

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.4 Sensitivity/frequency characteristics

8.4.0 General

It is recommended for all configurations (handset, headset etc) to have a flat sending frequency response in fullband mode.

Tolerance masks apply to the center frequencies of the fractional octave bands specified for the respective tests in TS 26.132.

8.4.1 Handset and headset UE sending

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.4.2 Handset and headset UE receiving

8.4.2.1 Handset UE receiving

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.4.2.2 Headset UE receiving

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.4.3 Desktop and vehicle-mounted hands-free UE sending

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.4.4 Desktop and vehicle-mounted hands-free UE receiving

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.4.5 Hand-held hands-free UE sending

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.4.6 Hand-held hands-free UE receiving

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.4.7 Electrical interface UE sending

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.4.8 Electrical interface UE receiving

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.5 Sidetone characteristics (handset, headset, and analogue electrical interface UE)

8.5.1 Sidetone loss

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.5.2 Sidetone delay

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.6 Stability loss

See requirements for super-wideband.

Compliance shall be checked by the relevant test described in TS 26.132.

8.7 Echo control

8.7.1 General

See requirements for super-wideband.

8.7.2 Acoustic echo control in desktop and vehicle-mounted hands-free UE

See requirements for super-wideband.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

8.7.3 Acoustic echo control in hand-held hands-free UE

See requirements for super-wideband.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

8.7.4 Acoustic echo control in a handset UE

See requirements for super-wideband.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

8.7.5 Acoustic echo control in a headset UE

See requirements for super-wideband.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

8.7.6 Echo control in an electrical interface UE

See requirements for super-wideband.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

8.8 Distortion

8.8.1 Sending distortion (excluding electrical interface UE)

See requirements for super-wideband.

Compliance of the sending distortion shall be checked by the test described in TS 26.132.

8.8.2 Receiving (excluding electrical interface UE)

See requirements for super-wideband.

Compliance of the receiving distortion shall be checked by the appropriate method in TS 26.132.

8.8.3 Sending distortion (electrical interface UE)

See requirements for super-wideband.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

8.8.4 Receiving distortion (electrical interface UE)

See requirements for super-wideband.

Compliance with this requirement shall be checked by the relevant test described in TS 26.132.

8.9 Void

8.10 Sending performance in the presence of ambient noise

8.10.1 General

See requirements for super-wideband (see clause 7.10.1)..

8.10.2 Connections with handset UE

See requirements for super-wideband (see clause 7.10.2).

8.10.3 Connections with Handheld hands-free UE

See requirements for super-wideband (see clause 7.10.3).

8.10.4 Connections with electrical interface UE

See requirements for super-wideband (see clause 7.10.4).

8.11 Delay

8.11.0 UE delay definition

8.11.0.1 Acoustic interfaces

For MTSI-based speech with LTE, NR or WLAN access, the UE delays in the send and receive directions are defined for acoustic interfaces as:

- The UE delay in the send (uplink) direction is the delay between the first acoustic event at the MRP to the last bit of the corresponding speech frame at the UE antenna
- The UE delay in the receive (downlink) direction is the delay between the first bit of a speech frame at the UE antenna and the first acoustic event at the DRP corresponding to that speech frame

NOTE: In order to harmonize UMTS and LTE delay definitions, the reference points for UMTS UE delay have been changed in Rel-12. Prior to Rel-12, the UE reference points for UMTS were implicitly defined by the compensation factors declared by system simulator vendors, i.e. half of the air interface delay was attributed to the UE, and the last acoustic event at DRP was used for the receive measurement instead of the first.

Considering 10ms for half of the transmission time in each direction of a UMTS call, a speech frame size of 20ms, a codec look-ahead of 5ms, and a difference between the first and the last acoustic event of 20 ms, the previous reference points took into account a UE implementation independent delay of $2 \times 10 \text{ms} + 25 \text{ms} + 20 \text{ms} = 65 \text{ms}$. The same UE delay remains in the new definition above, which attributes the full air interface delay to the UE but uses the first acoustic event at the DRP, instead of the last ($2 \times 20 \text{ms} + 25 \text{ms} + 0 \text{ms} = 65 \text{ms}$). Hence, the UMTS requirements with these new reference points remain the same.

8.11.0.2 Electrical interfaces

The UE delays in the send and receive directions are defined for electrical interfaces as:

- The UE delay in the send (uplink) direction is the delay between the first electrical event at the input of the electrical interface (analogue or wired digital connection) or first bit of a speech frame at the UE antenna of the wireless digital interface (wireless digital connection) to the last bit of the corresponding speech frame at the UE antenna
- The UE delay in the receive (downlink) direction is the delay between the first bit of a speech frame at the UE antenna and the first electrical event at the output of the electrical interface (analogue or wired digital

connection) or first bit of a speech frame at the UE antenna of the wireless digital interface (wireless digital connection) corresponding to that speech frame.

8.11.1 Handset UE

It is in general desirable to minimize UE delays to ensure low enough end-to-end delays and hence a good conversational experience, guidance is found in ITU-T Recommendation G.114.

For MTSI-based speech-only with LTE, NR or WLAN access in error and jitter free conditions and EVS speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) should be ≤ 157 ms. If this performance objective cannot be met, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be ≤ 197 ms.

For MTSI-based speech-only with LTE, NR or WLAN access in conditions with simulated packet arrival time variations and packet loss and EVS speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall be less than or equal to the delay requirements in Table 33a1, while meeting the speech quality targets defined.

NOTE: The UE delay requirements for MTSI-based speech-only with LTE, NR or WLAN access are derived from:

- A codec algorithmic delay of 32ms including speech frame buffering and encoder lookahead.
- An air interface transmission time of 1ms on receive and 1ms on the send direction.
- A budget allowance for a jitter buffer depth of 40ms for error and jitter free conditions and test conditions 0 and 1 of Table 33a1, and 80ms for test condition 2 of Table 33a1.
- A budget allowance for vendor specific implementation of 83ms corresponding to the performance objective and 123ms corresponding to the required maximum UE send and receive delay..

Table 33a1: UE delay and speech quality requirements for LTE, NR and WLAN access

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 157$ ms	$T_S + T_R \leq 197$ ms	ffs
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 157$ ms	$T_S + T_R \leq 197$ ms	ffs
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 197$ ms	$T_S + T_R \leq 237$ ms	ffs
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and target BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1]. The delay profiles in test condition 1 and 2 are static delay variation conditions and do not expose the UE to packet delay variations in the full range of the packet delay budget as defined for QCI1 in 3GPP TS 23.203 [18]. A third test condition that exposes the UE to non-stationary packet delay variations experienced in live operation and packet delay variations in the full range of the packet delay budget for QCI1, and accompanied delay and speech quality requirements, is for further study.				
NOTE 2: P.863 is limited to 14 kHz bandwidth; therefore the speech quality requirements are ffs.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

8.11.2 Headset UE

8.11.2.1 Wired headset

It is in general desirable to minimize UE delays to ensure low enough end-to-end delays and hence a good conversational experience, guidance is found in ITU-T Recommendation G.114.

For MTSI-based speech-only with LTE, NR or WLAN access in error and jitter free conditions and EVS speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) should be ≤ 157 ms. If this performance objective cannot be met, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be ≤ 197 ms.

For MTSI-based speech-only with LTE, NR or WLAN access in conditions with simulated packet arrival time variations and packet loss and EVS speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall be less than or equal to the delay requirements in Table 33a2, while meeting the speech quality targets defined.

NOTE: The UE delay requirements for MTSI-based speech-only with LTE, NR or WLAN access are derived from:

- A codec algorithmic delay of 32ms including speech frame buffering and encoder lookahead.
- An air interface transmission time of 1ms on receive and 1ms on the send direction.
- A budget allowance for a jitter buffer depth of 40ms for error and jitter free conditions and test conditions 0 and 1 of Table 33a2, and 80ms for test condition 2 of Table 33a2.
- A budget allowance for vendor specific implementation of 83ms corresponding to the performance objective and 123ms corresponding to the required maximum UE send and receive delay.

Table 33a2: UE delay and speech quality requirements for LTE, NR and WLAN access

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 157$ ms	$T_S + T_R \leq 197$ ms	ffs
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 157$ ms	$T_S + T_R \leq 197$ ms	ffs
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 197$ ms	$T_S + T_R \leq 237$ ms	ffs
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and target BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1]. The delay profiles in test condition 1 and 2 are static delay variation conditions and do not expose the UE to packet delay variations in the full range of the packet delay budget as defined for QCI1 in 3GPP TS 23.203 [18]. A third test condition that exposes the UE to non-stationary packet delay variations experienced in live operation and packet delay variations in the full range of the packet delay budget for QCI1, and accompanied delay and speech quality requirements, is for further study.				
NOTE 2: P.863 is limited to 14 kHz bandwidth; therefore, the speech quality requirements are ffs.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

8.11.2.2 Wireless headset

For further study.

8.11.3 Electrical interface UE

It is in general desirable to minimize UE delays to ensure low enough end-to-end delays and hence a good conversational experience, guidance is found in ITU-T Recommendation G.114.

The delay budget B_D to be considered in the performance requirements and objectives depends on the type of electrical interface UE and is given by Table 33a3.

Table 33a3: Delay budget for different types of electrical interface UE

Electrical interface type	B_D [ms]
Analogue	0
Wireless digital	20
Wired digital	20
NOTE: The delay for analogue to digital conversion (and vice versa) in the wired digital connection is considered to be part of the budget allowance for vendor specific implementation in the UE delay requirements.	

For MTSI-based speech-only with LTE, NR or WLAN access in error and jitter free conditions and EVS speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) should be $\leq 157 + B_D$ ms. If this performance objective cannot be met, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall in any case be $\leq 197 + B_D$ ms.

For MTSI-based speech-only with LTE, NR or WLAN access in conditions with simulated packet arrival time variations and packet loss and EVS speech codec operation, the sum of the UE delays in sending and receiving directions ($T_S + T_R$) shall be less than or equal to the delay requirements in Table 33a3, while meeting the speech quality targets defined.

NOTE: The UE delay requirements for MTSI-based speech-only with LTE, NR or WLAN access are derived from:

- A codec algorithmic delay of 32ms including speech frame buffering and encoder lookahead.
- An air interface transmission time of 1ms on receive and 1ms on the send direction.
- A budget allowance for a jitter buffer depth of 40ms for error and jitter free conditions and test conditions 0 and 1 of Table 33a4, and 80ms for test condition 2 of Table 33a4.
- A budget allowance for vendor specific implementation of 83ms corresponding to the performance objective and 123ms corresponding to the required maximum UE send and receive delay.

Table 33a4: UE delay and speech quality requirements for LTE, NR and WLAN access

Test Condition	Delay and Loss Profile (Note 1)	Performance Objectives for Maximum Delay	Requirements for Maximum Delay	Speech Quality Requirements (Note 2)
0	Error and jitter free condition	$T_S + T_R \leq 157 + B_D$ ms	$T_S + T_R \leq 197 + B_D$ ms	ffs
1	dly_profile_20msDRX_10pct_BLER_e2e	$T_S + T_R \leq 157 + B_D$ ms	$T_S + T_R \leq 197 + B_D$ ms	ffs
2	dly_profile_40msDRX_10pct_BLER_e2e	$T_S + T_R \leq 197 + B_D$ ms	$T_S + T_R \leq 237 + B_D$ ms	ffs
NOTE 1: The delay profiles for test condition 1 and 2 are theoretically constructed to simulate a semi-persistent scheduling transmission scheme with DRX enabled and target BLER in sending and receiving directions of 10%, with +/- 3ms of EPC jitter. Delay profiles are injected at the IP layer of the test system. Delay profiles are attached electronically to document 3GPP TS 26.132 [1]. The delay profiles in test condition 1 and 2 are static delay variation conditions and do not expose the UE to packet delay variations in the full range of the packet delay budget as defined for QCI1 in 3GPP TS 23.203 [18]. A third test condition that exposes the UE to non-stationary packet delay variations experienced in live operation and packet delay variations in the full range of the packet delay budget for QCI1, and accompanied delay and speech quality requirements, is for further study.				
NOTE 2: P.863 is limited to 14 kHz bandwidth; therefore the speech quality requirements are ffs.				

Compliance shall be checked by the relevant tests described in 3GPP TS 26.132.

8.12 Echo control characteristics

See requirements for super-wideband.

8.12.1 Handset

Requirements are for further study.

8.12.2 Headset

Requirements are for further study.

8.12.3 Handheld hands-free

Requirements are for further study.

8.12.4 Desktop and vehicle mounted hands-free

Requirements are for further study.

8.12.5 Electrical interface

Requirements are for further study.

8.13 Clock accuracy

For MTSI-based speech-only with LTE, NR or WLAN access, the clock skew in send direction between the device under test and the reference client should be less than 50 PPM (in absolute value) in error-free conditions.

Compliance shall be checked by the relevant test described in TS 26.132.

8.14 Jitter buffer management behaviour

For MTSI-based speech-only with LTE, NR or WLAN access, a jitter buffer is used in receiving to handle the variation in packet receiver timing (see clause 8 of TS 26.114 [17]).

If the jitter buffer management (JBM) behaviour is evaluated, the following statistics shall be reported for conditions specified in TS 26.132:

- Delay histogram (on a per sentence basis)
- Quality loss histogram (on a per sentence pair basis)

and all measured delay and quality loss values for these conditions shall be reported as a function of measurement time, together with minimum and maximum values.

The relevant test is described in 3GPP TS 26.132.

Annex A (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
1999-12					Approved at TSG-SA#6 Plenary		3.0.0
2000-06	8	SP-000264	001	2	CR on Addition of a chapter pointing to ITU-T Recommendations for extended parameters	3.0.0	3.1.0
2000-06	8	SP-000264	002		CR on Listener side tone (LSTR) and talker side tone (STMR) requirements	3.0.0	3.1.0
2000-06	8	SP-000264	003	1	CR on Change of Handset and headset UE receiving sensitivity/frequency characteristic mask	3.0.0	3.1.0
2000-06	8	SP-000264	004	1	CR on Acoustic requirements for Handheld-type hands-free user equipment	3.0.0	3.1.0
2001-03	11	SP-010106	005	1	Harmonisation of narrow-band acoustic requirements between 3GPP and GSM	3.1.0	3.2.0
2001-03	11				Release 4		4.0.0
2001-03	11	SP-010106	006	3	Wideband acoustic requirements	4.0.0	5.0.0
2001-09	13	SP-010453	009		Introduction of ANR tolerance of 3 dB	5.0.0	5.1.0
2002-09	17	SP-020435	014		Correction on the ANR requirement for hands-free Ues	5.1.0	5.2.0
2004-09	25	SP-040649	022		Change of sending distortion requirement	5.2.0	6.0.0
2007-03	35	SP-070026	0023	1	Minimum echo loss requirements	6.0.0	6.1.0
2007-03	35	SP-070026	0024	1	Correcting wrong reference to ITU-T G.223	6.0.0	6.1.0
2007-03	35	SP-070026	0025	1	Update of reference [11] to P.79-2001 Annex G	6.0.0	6.1.0
2007-03	35	SP-070026	0027	1	Sending distortion requirements for WB-AMR	6.0.0	6.1.0
2007-06	36				Version for Release 7	6.1.0	7.0.0
2007-12	38	SP-070759	0028	2	Creating a sidetone requirement for the case where HATS method is used	7.0.0	7.1.0
2008-12	42	SP-080682	0030	1	Receiving characteristics harmonization	7.1.0	8.0.0
2008-12	42	SP-080682	0031	1	Updated requirements and performance objectives for wideband terminal acoustics	7.1.0	8.0.0
2009-03	43	SP-090017	0029	2	Terminal acoustic characteristics for telephony	8.0.0	9.0.0
2009-06	44	SP-090257	0033		Receiving sensitivity/frequency mask correction	9.0.0	9.1.0
2009-09	45	SP-090568	0035	1	Correction of STMR calculation	9.1.0	9.2.0
2010-03	47	SP-100021	0036	1	Correction of distortion measurements	9.2.0	9.3.0
2010-09	49	SP-100470	0039	4	Enhancement of STMR requirements	9.3.0	10.0.0
2011-03	51	SP-110042	0041	3	Alignment of 3GPP Audio Test Requirements	10.0.0	10.1.0
2011-03	51	SP-110149	0044	3	Correction of WB receive distortion requirements	10.0.0	10.1.0
2011-06	52	SP-110304	0040	3	Remaining modifications to EAAT WI	10.1.0	10.2.0
2011-09	53	SP-110549	0046	1	Note on applicability of WB sidetone delay	10.2.0	10.3.0
2011-11	54	SP-110793	0047		Correction of sending idle channel noise requirement	10.3.0	10.4.0
2011-11	54	SP-110793	0048		Corrections to volume control setting	10.3.0	10.4.0
2012-09	57	SP-120503	0052	3	Addition of UE delay requirement	10.4.0	11.0.0
2012-09	57	SP-120503	0053	1	Extension of Acoustic Test Requirements	10.4.0	11.0.0
2012-12	58	SP-120760	0054	2	Minor clarification of UMTS UE Delay Requirements	11.0.0	11.1.0
2013-03	59	SP-130017	0055	1	Voiding of ambient noise rejection test cases	11.1.0	11.2.0
2013-06	60	SP-130189	0056		Adding receiving distortion tests at frequencies lower than 1020Hz	11.2.0	12.0.0
2013-06	60	SP-130189	0057	1	Update acoustic requirements specification to cover MTSI speech-only services over LTE (narrowband and wideband)	11.2.0	12.0.0
2013-12	62	SP-130563	0061	2	STMR - adaptation to modern form factors	12.0.0	12.1.0
2014-09	65	SP-140469	0062	1	LTE UE delay requirements	12.1.0	12.2.0
2014-12	66	SP-140731	0063	2	Acoustic requirements for super-wideband and fullband telephony	12.2.0	12.3.0
2015-06	68	SP-150209	0065	3	Aligning requirements in TS 26.131 to test conditions in TS 26.132 related to free-field correction for hands-free modes	12.3.0	12.4.0
2015-09	69	SP-150445	0066	1	UE delay requirements for MTSI-based services over LTE with the EVS codec	12.4.0	13.0.0
2015-12	70	SP-150651	0067	1	Additional UE delay test scenarios for MTSI-based services over LTE with the EVS codec	13.0.0	13.1.0
2016-03	71	SP-160065	0069	3	Frequency Response Masks for SWB and FB	13.1.0	13.2.0
2016-03	71	SP-160067	0070	3	Performance objectives for the transmission quality in the sending direction in the presence of ambient noise, for hand-held handsfree	13.1.0	13.2.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2016-06	72	SP-160260	0071	1	F	Removal of brackets for channel-aware mode delay requirements	13.3.0
2017-03	75					Version for Release 14	14.0.0
2017-06	76	SP-170325	0073	3	B	Extension of UE Delay Requirements	14.1.0
2017-06	76	SP-170321	0074	1	B	Addition of SWB and FB noise suppression performance objectives	14.1.0
2018-06	80	SP-180274	0075	-	B	Addition of requirements and objectives for SWB and FB terminals	15.0.0
2018-06	80	SP-180273	0076	1	B	Criteria for RLR in the presence of background noise	15.0.0
2018-09	81	SP-180648	0077	-	B	Requirements and objectives for SWB and FB terminals	15.1.0
2019-09	85	SP-190648	0080	1	A	Clarification of WLAN delay requirements	15.2.0
2019-09	85	SP-190650	0078	2	B	Support of NR	16.0.0
2021-09	SA#93-e	SP-210823	0082	3	F	Correction of missing figure for WB frequency mask in receiving	17.0.0
2021-12	SA#94-e	SP-211350	0083	-	B	Extension for headset interface tests of UE	17.1.0
2022-01	Post SA#94-e					Minor Editorial Corrections	17.1.1
2022-09	SA#97-e	SP-220763	0084		F	Missing definition of performance requirements for receive frequency response (electrical interface UE)	17.2.0
2022-12	SA#98-e	SP-221051	0087	1	F	Corrections for idle noise and sidetone requirements (electrical interface UE)	17.3.0

History

Document history		
V17.1.1	May 2022	Publication
V17.2.0	October 2022	Publication
V17.3.0	January 2023	Publication