ETSITS 129 165 V12.15.0 (2017-04)



Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE;

Inter-IMS Network to Network Interface (NNI) (3GPP TS 29.165 version 12.15.0 Release 12)



Reference RTS/TSGC-0329165vcf0 Keywords GSM,LTE,UMTS

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from: http://www.etsi.org/standards-search

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx

If you find errors in the present document, please send your comment to one of the following services: https://portal.etsi.org/People/CommiteeSupportStaff.aspx

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2017.
All rights reserved.

DECT[™], **PLUGTESTS**[™], **UMTS**[™] and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP**[™] and **LTE**[™] are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the <u>ETSI Drafting Rules</u> (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

Contents

Intell	lectual Property Rights	2
Forev	word	2
Moda	al verbs terminology	2
	word	
1	Scope	
2	References	
3 3.1	Definitions, symbols and abbreviations	
3.2	Symbols	
3.3	Abbreviations	
4	Overview	18
5	Reference model for interconnection between IM CN subsystems	20
5.1	General	
5.2	Functionalities performed by entities at the edge of the network	
5.2.1	Interconnection Border Control Function (IBCF)	
5.2.2	Transition Gateway (TrGW)	
5.3	Identifying II-NNI traversal scenario	
5.3.1	General	
5.3.2	Mapping of the "iotl" SIP URI parameter to II-NNI traversal scenario	
6	Control plane interconnection	22
6.1	Definition of Inter-IMS Network to Network Interconnection	22
6.1.1	SIP methods and header fields	22
6.1.1.	1 General	22
6.1.1.		
6.1.1.		
6.1.1.		
6.1.1.	T .	
6.1.1.	TI	
6.1.1.	Tr 8	
6.1.1.		
6.1.1.4		
6.1.1.		
6.1.2	SDP protocol	
6.1.2.		
6.1.3	Major capabilities	
6.1.4	SIP message bodies	
6.2	Control Plane Transport	
6.2.1 6.3	GeneralSIP timers	
7	User plane Interconnection	
7.1	Media and Codec	
7.2	User Plane Transport	38
8	Numbering, Naming and Addressing	
8.1	Numbering, Naming and Addressing for SIP message	
8.2	Numbering, Naming and Addressing for SDP	40
9	IP Version	40
10	Security	40
11	Charging	
11.1	General	
11.1	UV11V1 u1	- 10

11.2 11.3	Inter-operator accounting	
	Supplementary services associated with the IMS multimedia telephony communication service.	
12.1	General	
12.2	Malicious Communication IDentification (MCID)	
12.3	Originating Identification Presentation (OIP) and Originating Identification Restriction (OIR)	
12.4	Terminating Identification Presentation (TIP) and Terminating Identification Restriction (TIR)	
12.5	Anonymous Communication Rejection (ACR)	
12.6	Communication DIVersion (CDIV)	
12.7	Communication Waiting (CW)	
12.8	Communication HOLD (HOLD)	
12.9	Message Waiting Indication (MWI)	
12.10	Communication Barring (CB)	
12.10.1	Incoming Communication Barring (ICB)	
12.10.2	Outgoing Communication Barring (OCB)	
12.11	Completion of Communications to Busy Subscriber (CCBS)	
12.12	Completion of Communications by No Reply (CCNR)	
12.13	Explicit Communication Transfer (ECT)	
12.13.1	Consultative and blind transfer	
12.13.2	Assured transfer	
12.14	Customized Alerting Tone (CAT)	
12.15	Customized Ringing Signal (CRS)	
12.16	Closed User Group (CUG)	
12.17	Personal Network Management (PNM)	
12.18	Three-Party (3PTY)	
12.19 12.20	Conference (CONF)	
12.20	Flexible Alerting (FA)Announcements	
12.21	General	
12.21.1	Providing announcements during the establishment of a communication session	
12.21.2	Providing announcements during the established communication session	
12.21.3	Providing announcements when communication request is rejected	
12.21.4	Advice of Charge (AOC)	
12.23	Completion of Communications on Not Logged-in (CCNL)	
12.24	Unstructured Supplementary Service Data (USSD)	
	nteroperability of IMS Centralized Services (ICS) over II-NNI	
13.1	General	
13.2	IMS Centralized Services (ICS)	52
14 I	nteroperability of IMS Service Continuity over II-NNI	52
14.1	General	
14.2	PS to CS Single Radio Voice Call Continuity (SRVCC) and Single Radio Video Call Continuity	
	(vSRVCC)	52
14.2.1	Basic PS to CS SRVCC	
14.2.2	PS to CS SRVCC for calls in alerting phase	
14.2.3	Using the ATCF based architecture	
14.2.4	PS to CS SRVCC for originating calls in pre-alerting phase	
14.2.5	PS to CS SRVCC with the MSC server assisted mid-call feature	
14.3	Inter UE Transfer (IUT)	
14.4	MSC server assisted mid-call feature	54
14.5	CS to PS Single Radio Voice Call Continuity (SRVCC)	55
14.5.1	Basic CS to PS SRVCC	
14.5.2	CS to PS SRVCC for calls in alerting phase	
14.5.3	CS to PS SRVCC with the assisted mid-call feature	
14.6	PS to CS dual radio voice call continuity (DRVCC)	
14.6.1	Basic PS to CS DRVCC	55
14.6.2	PS to CS DRVCC with the assisted mid-call feature	56
14.6.3	PS to CS DRVCC for calls in alerting phase	56
14.6.4	PS to CS DRVCC for originating calls in pre-alerting phase	
14.7	CS to PS Dual Radio Voice Call Continuity (DRVCC)	56
14.7.1	Basic CS to PS DRVCC	56

14.7.2	CS to PS DRVCC with the assisted mid-call feature	57
14.7.3		
14.7.4		
14.8	PS to PS access transfer	57
15	Presence service	58
15.0	General	58
15.1	Subscription of presence information	58
15.2	Watcher subscribing to Presence List	58
15.3	Subscription to Watcher Information	59
15.4	Subscription to state changes in XML documents	
15.5	Presence enhancements specified in Open Mobile Alliance (OMA) Release 1.1	
15.5.1		
15.5.2		
15.5.3		
15.5.4		
15.6	Presence enhancements specified in Open Mobile Alliance (OMA) Release 2.0	
15.6.1		
15.6.2	T T T T T T T T T T T T T T T T T T T	
15.6.3		
15.6.4	1 · · · · · · · · · · · · · · · · · · ·	
15.6.5		
15.6.6		
15.6.7		
16	Messaging service	61
16.1	General	61
16.2	Page-mode messaging	62
16.4	Session-mode messaging	
16.5	Session-mode messaging conferences	62
17	Optimal Media Routeing	60
17.1	General	
17.1	OMR related SDP attributes	
17.2	IP realm names	
1.0		
18	Inter-UE transfer (IUT)	
18.1	General	
18.2	IUT without establishment of a collaborative session	
18.3 18.3.1	IUT using a collaborative session	
18.3.2		
18.3.3		
18.3.4		
18.4	Session replication / media replication	
18.4.1		
18.4.2		
19	Roaming Architecture for Voice over IMS with Local Breakout	66
20	Delivery of Media Resource Broker address information	66
21	Overload control	6.0
21.1		
	General Facilities to the second management of	
21.2 21.3	Feedback based mechanism	
22	Delivery of original destination identity	
23	Telepresence using IMS	
24	Barring of premium rate numbers	
25	P-CSCF restoration	68
25.1	General	
25.2	PCRF based P-CSCF restoration	68

25.3	HSS based P-CSCF r	estoration	68
Anne	ex A (informative):	Summary of SIP header fields	69
Anne	ex B (informative):	Dynamic view of SIP header fields within SIP messages	73
B.1	Scope		73
B.2	Methodology		73
B.3	ACK method		75
B.4	BYE method		76
B.5	CANCEL method		79
B.6	INFO method		80
B.7	INVITE method		85
B.8	MESSAGE method		93
B.9	NOTIFY method		99
B.10	OPTIONS method		104
B.11	PRACK method		110
B.12	PUBLISH method		113
B.13	REFER method		119
B.14	REGISTER method		125
B.15	SUBSCRIBE method.		129
B.16	UPDATE method		136
Anne	ex C (informative):	The list of option items for II-NNI	140
C.1	Scope		140
C.2	Format of option item	table	140
C.3 C.3.0 C.3.1 C.3.2 C.3.3	Supported II-NNI tra Option item table cor Option item table	versal scenarios nmon to roaming, non-roaming II-NNI and loopback traversal scenario specific to roaming II-NNI and loopback traversal scenario	141 141 149
Anne	ex D: Change hist	ory	155
Histo	ry		158

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The objective of this document is to address the Inter-IMS Network to Network Interface (II-NNI) consisting of Ici and Izi reference points between IMS networks in order to support end-to-end service interoperability.

The present document will address the issues related to control plane signalling (3GPP usage of SIP and SDP protocols, required SIP header fields) as well as other interconnecting aspects like security, numbering/naming/addressing and user plane issues as transport protocol, media and codecs actually covered in a widespread set of 3GPP specifications. A profiling of the Inter-IMS Network to Network Interface (II-NNI) is also provided.

Charging aspects will be addressed as far as SIP signalling is concerned.

SIP signalling traversing the NNI between a CSCF and an AS or MRB, e.g. for media control or Voice Interworking with Enterprise IP-PBX, and SIP signalling traversing the NNI on the Mr interface between the CSCF and the MRFC, or on the Mr' interface between the AS and MRFC, or on the Rc interface between AS and MRB is not considered in the present release of this specification.

SIP signalling traversing the NNI between an ISC gateway and an AS in an enterprise network, e.g. for media control and voice interworking with enterprise IP-PBX, on the ISC interface between the ISC gateway and the enterprise network is not considered in the present release of this specification.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document in the same Release as the present document.

[1]	3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
[2]	IETF RFC 791: "Internet Protocol".
[3]	3GPP TS 23.002: "Network architecture".
[4]	3GPP TS 23.228: "IP Multimedia Subsystem (IMS); Stage 2".
[5]	3GPP TS 24.229: "Internet Protocol (IP) multimedia call control protocol based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP); Stage 3".
[6]	3GPP TR 24.930: "Signalling flows for the session setup in the IP Multimedia core network Subsystem (IMS) based on Session Initiation Protocol (SIP) and Session Description Protocol (SDP); Stage 3".
[7]	IETF RFC 2460: "Internet Protocol, Version 6 (IPv6) Specification".
[8]	3GPP TS 29.162: "Interworking between the IM CN subsystem and IP networks".
[9]	3GPP TS 22.228: "Service requirements for the IP multimedia core network subsystem".
[10]	3GPP TS 33.210: "3G security; Network Domain Security (NDS); IP network layer security".
[11]	3GPP TS 26.114 : "IP Multimedia Subsystem (IMS); Multimedia Telephony; Media handling and interaction".
[12]	ETSI TS 181 005 V1.1.1: "Telecommunications and Internet converged Services and Protocols for

Advanced Networking (TISPAN); Services and Capabilities Requirements".

[13]	IETF RFC 3261: "SIP: Session Initiation Protocol".
[14]	IETF RFC 3966: "The tel URI for Telephone Numbers".
[15]	IETF RFC 3860: "Common Profile for Instant Messaging (CPIM)".
[16]	IETF RFC 3859: "Common Profile for Presence (CPP)".
[17]	IETF RFC 4975: "The Message Session Relay Protocol (MSRP)".
[18]	IETF RFC 3262: "Reliability of provisional responses in Session Initiation Protocol (SIP)".
[19]	IETF RFC 3428: "Session Initiation Protocol (SIP) Extension for Instant Messaging".
[20]	IETF RFC 6665: "SIP-Specific Event Notification".
NOTE:	In earlier releases of this document the predecessor IETF RFC 3265 is used.
[21]	IETF RFC 3903: "An Event State Publication Extension to the Session Initiation Protocol (SIP)".
[22]	IETF RFC 3515: "The Session Initiation Protocol (SIP) REFER method".
[23]	IETF RFC 3311: "The Session Initiation Protocol (SIP) UPDATE method".
[24]	IETF RFC 7315: "Private Header (P-Header) Extensions to the Session Initiation Protocol (SIP) for the 3GPP".
[24A]	IETF RFC 7976: "Updates to Private Header (P-Header) Extension Usage in Session Initiation Protocol (SIP) Requests and Responses".
[24B]	IETF RFC 7913: "P-Access-Network-Info ABNF Update".
[25]	IETF RFC 7044: "An Extension to the Session Initiation Protocol (SIP) for Request History Information".
[26]	IETF RFC 6050: "A Session Initiation Protocol (SIP) Extension for the Identification of Services".
[27]	IETF RFC 4168: "The Stream Control Transmission Protocol (SCTP) as a Transport for the Session Initiation Protocol (SIP)".
[28]	Void.
[29]	3GPP TS 32.260: "Telecommunication management; Charging management; IP Multimedia Subsystem (IMS) charging".
[30]	3GPP TS 22.173: "IP Multimedia Core Network Subsystem (IMS); Multimedia Telephony Service and supplementary services; Stage 1".
[31]	3GPP TS 24.173: "IMS multimedia telephony communication service and supplementary services; Stage 3".
[32]	3GPP TS 24.607: "Originating Identification Presentation (OIP) and Originating Identification Restriction (OIR) using IP Multimedia (IM); Core Network (CN) subsystem".
[33]	3GPP TS 24.616: "Malicious Communication Identification (MCID) using IP Multimedia (IM) Core Network (CN) subsystem".
[34]	IETF RFC 3323: "A Privacy Mechanism for the Session Initiation Protocol (SIP)".
[35]	3GPP TS 23.003: "Numbering, addressing and identification".
[36]	3GPP TS 24.610: "Communication HOLD (HOLD) using IP Multimedia (IM) Core Network (CN) subsystem".
[37]	3GPP TS 24.615: "Communication Waiting (CW) using IP Multimedia (IM) Core Network (CN) subsystem".

[38]	3GPP TS 24.628: "Common Basic Communication procedures using IP Multimedia (IM) Core Network (CN) subsystem".
[39]	IETF RFC 6086: "Session Initiation Protocol (SIP) INFO Method and Package Framework".
[40]	IETF RFC 3312: "Integration of resource management and Session Initiation Protocol (SIP)".
[41]	IETF RFC 4032: "Update to the Session Initiation Protocol (SIP) Preconditions Framework".
[42]	IETF RFC 3313: "Private Session Initiation Protocol (SIP) Extensions for Media Authorization".
[43]	IETF RFC 3327: "Session Initiation Protocol Extension Header Field for Registering Non-Adjacent Contacts".
[44]	IETF RFC 3325: "Private Extensions to the Session Initiation Protocol (SIP) for Network Asserted Identity within Trusted Networks".
[45]	IETF RFC 3608: "Session Initiation Protocol (SIP) Extension Header Field for Service Route Discovery During Registration".
[46]	IETF RFC 3486: "Compressing the Session Initiation Protocol (SIP)".
[47]	IETF RFC 3329: "Security Mechanism Agreement for the Session Initiation Protocol (SIP)".
[48]	IETF RFC 3326: "The Reason Header Field for the Session Initiation Protocol (SIP)".
[49]	IETF RFC 6432: "Carrying Q.850 Codes in Reason Header Fields in SIP (Session Initiation Protocol) Responses".
[50]	IETF RFC 3581: "An Extension to the Session Initiation Protocol (SIP) for Symmetric Response Routing".
[51]	IETF RFC 3841: "Caller Preferences for the Session Initiation Protocol (SIP)".
[52]	IETF RFC 4028: "Session Timers in the Session Initiation Protocol (SIP)".
[53]	IETF RFC 3892: "The Session Initiation Protocol (SIP) Referred-By Mechanism".
[54]	IETF RFC 3891: "The Session Initiation Protocol (SIP) 'Replaces' Header".
[55]	IETF RFC 3911: "The Session Initiation Protocol (SIP) 'Join' Header".
[56]	IETF RFC 3840: "Indicating User Agent Capabilities in the Session Initiation Protocol (SIP)".
[57]	IETF RFC 5079: "Rejecting Anonymous Requests in the Session Initiation Protocol (SIP)".
[58]	IETF RFC 4458: "Session Initiation Protocol (SIP) URIs for Applications such as Voicemail and Interactive Voice Response (IVR)".
[59]	IETF RFC 4320: "Actions Addressing Identified Issues with the Session Initiation Protocol's (SIP) Non-INVITE Transaction".
[60]	IETF RFC 4457: "The Session Initiation Protocol (SIP) P-User-Database Private-Header (Pheader)".
[61]	IETF RFC 5031: "A Uniform Resource Name (URN) for Emergency and Other Well-Known Services".
[62]	IETF RFC 5627: "Obtaining and Using Globally Routable User Agent (UA) URIs (GRUU) in the Session Initiation Protocol (SIP)".
[63]	Void.
[64]	IETF RFC 5002: "The Session Initiation Protocol (SIP) P-Profile-Key Private Header (P-Header)".
[65]	IETF RFC 5626: "Managing Client-Initiated Connections in the Session Initiation Protocol (SIP)".

[66]	IETF RFC 5768: "Indicating Support for Interactive Connectivity Establishment (ICE) in the Session Initiation Protocol (SIP)".
[67]	IETF RFC 5365: "Multiple-Recipient MESSAGE Requests in the Session Initiation Protocol (SIP)".
[68]	IETF RFC 6442: "Location Conveyance for the Session Initiation Protocol".
[69]	IETF RFC 5368: "Referring to Multiple Resources in the Session Initiation Protocol (SIP)".
[70]	IETF RFC 5366: "Conference Establishment Using Request-Contained Lists in the Session Initiation Protocol (SIP)".
[71]	IETF RFC 5367: "Subscriptions to Request-Contained Resource Lists in the Session Initiation Protocol (SIP)".
[72]	IETF RFC 4967: "Dial String Parameter for the Session Initiation Protocol Uniform Resource Identifier".
[73]	IETF RFC 4964: "The P-Answer-State Header Extension to the Session Initiation Protocol for the Open Mobile Alliance Push to Talk over Cellular".
[74]	IETF RFC 5009: "Private Header (P-Header) Extension to the Session Initiation Protocol (SIP) for Authorization of Early Media".
[75]	IETF RFC 4694: "Number Portability Parameters for the 'tel' URI".
[76]	Void.
[77]	IETF RFC 4411: "Extending the Session Initiation Protocol (SIP) Reason Header for Preemption Events".
[78]	IETF RFC 4412: "Communications Resource Priority for the Session Initiation Protocol (SIP)".
[79]	IETF RFC 5393: "Addressing an Amplification Vulnerability in Session Initiation Protocol (SIP) Forking Proxies".
[80]	IETF RFC 5049: "Applying Signaling Compression (SigComp) to the Session Initiation Protocol (SIP)".
[81]	IETF RFC 5688: "A Session Initiation Protocol (SIP) Media Feature Tag for MIME Application Sub-Types".
[82]	IETF RFC 5360: "A Framework for Consent-Based Communications in the Session Initiation Protocol (SIP)".
[83]	IETF RFC 7433: "A Mechanism for Transporting User-to-User Call Control Information in SIP".
[83A]	IETF RFC 7434: "Interworking ISDN Call Control User Information with SIP".
[84]	IETF RFC 7316: "The Session Initiation Protocol (SIP) P-Private-Network-Indication Private Header (P-Header)".
[85]	IETF RFC 5502: "The SIP P-Served-User Private-Header (P-Header) for the 3GPP IP Multimedia (IM) Core Network (CN) Subsystem".
[86]	Void.
[87]	Void.
[88]	IETF RFC 6228: "Response Code for Indication of Terminated Dialog".
[89]	IETF RFC 5621: "Message Body Handling in the Session Initiation Protocol (SIP)".
[90]	IETF RFC 6223: "Indication of support for keep-alive".
[91]	IETF RFC 5552: "SIP Interface to VoiceXML Media Services".

[92]	IETF RFC 3862: "Common Presence and Instant Messaging (CPIM): Message Format".
[93]	IETF RFC 5438: "Instant Message Disposition Notification".
[94]	IETF RFC 5373: "Requesting Answering Modes for the Session Initiation Protocol (SIP)".
[95]	Void.
[96]	IETF RFC 3959: "The Early Session Disposition Type for the Session Initiation Protocol (SIP)".
[97]	Void.
[98]	3GPP TS 24.183: "Customized Ringing Signal (CRS) using IP Multimedia (IM) Core Network (CN) subsystem".
[99]	3GPP TS 24.259: "Personal Network Management (PNM) using IP Multimedia (IM) Core Network (CN) subsystem".
[100]	3GPP TS 24.238: "Session Initiation Protocol (SIP) based user configuration".
[101]	3GPP TS 24.239: "Flexible Alerting (FA) using IP Multimedia (IM) Core Network (CN) subsystem".
[102]	Void.
[103]	3GPP TS 24 654: "Closed User Group (CUG) using IP Multimedia (IM) Core Network (CN) subsystem".
[104]	Void.
[105]	3GPP TS 24.605: "Conference (CONF) using IP Multimedia (IM) Core Network (CN) subsystem".
[106]	3GPP TS 24.147: "Conferencing using the IP Multimedia (IM) Core Network (CN) subsystem".
[107]	Void.
[108]	Void.
[109]	3GPP TS 24.642: "Completion of Communications to Busy Subscriber (CCBS) Completion of Communications by No Reply (CCNR) using IP Multimedia (IM) Core Network (CN) subsystem".
[110]	Void.
[111]	Void.
[112]	3GPP TS 24.606: "Message Waiting Indication (MWI) using IP Multimedia (IM) Core Network (CN) subsystem".
[113]	3GPP TS 24.608: "Terminating Identification Presentation (TIP) and Terminating Identification Restriction (TIR) using IP Multimedia (IM); Core Network (CN) subsystem".
[114]	3GPP TS 24.611: "Communication Barring (CB) using IP Multimedia (IM); Core Network (CN) subsystem".
[115]	Void.
[116]	3GPP TS 24.629: "Explicit Communication Transfer (ECT) using IP Multimedia (IM) Core Network (CN) subsystem".
[117]	3GPP TS 24.604: "Communication DIVersion (CDIV) using IP Multimedia (IM) Core Network (CN) subsystem".
[118]	Void.
[119]	Void.

[120]	3GPP TS 23.292: "IP Multimedia Subsystem (IMS) Centralized Services; Stage 2".
[121]	3GPP TS 24.292: "IP Multimedia Core Network subsystem Centralized Services (ICS); Stage 3".
[122]	3GPP TS 24.647: "Advice Of Charge (AOC) using IP Multimedia (IM) Core Network (CN) subsystem".
[123]	Void.
[124]	IETF RFC 7989: "End-to-End Session Identification in IP-Based Multimedia Communication Networks".
[125]	IETF RFC 6026: "Correct Transaction Handling for 2xx Responses to Session Initiation Protocol (SIP) INVITE Requests".
[126]	IETF RFC 5658: "Addressing Record-Route issues in the Session Initiation Protocol (SIP)".
[127]	IETF RFC 5954: "Essential correction for IPv6 ABNF and URI comparison in RFC3261".
[128]	Void.
[129]	3GPP TS 24.182: "IP Multimedia Subsystem (IMS) Customized Alerting Tones (CAT)".
[130]	3GPP TS 29.292: "Interworking between the IP Multimedia (IM) Core Network (CN) subsystem and MSC Server for IMS Centralized Services (ICS)".
[131]	3GPP TS 24.237: "IP Multimedia (IM) Core Network (CN) subsystem; IP Multimedia Subsystem (IMS) Service Continuity".
[132]	3GPP TS 24.141: "Presence service using the IP Multimedia (IM) Core Network (CN) subsystem".
[133]	IETF RFC 6794: "A Framework for Session Initiation Protocol (SIP) Session Policies".
[134]	IETF RFC 5875: "An Extensible Markup Language (XML) Configuration Access Protocol (XCAP) Diff Event Package".
[135]	IETF RFC 4488: "Suppression of Session Initiation Protocol (SIP) REFER Method Implicit Subscription".
[136]	IETF RFC 7462: "URNs for the Alert-Info Header Field of the Session Initiation Protocol (SIP)".
[137]	Void.
[138]	OMA-TS-Presence_SIMPLE-V2_0-20120710-A: "Presence SIMPLE Specification".
[139]	3GPP TS 24.247: "Messaging service using the IP Multimedia (IM) Core Network (CN) subsystem".
[140]	IETF RFC 4538: "Request Authorization through Dialog Identification in the Session Initiation Protocol (SIP)".
[141]	IETF RFC 5318: "The Session Initiation Protocol (SIP) P-Refused-URI-List Private-Header (P-Header)".
[142]	OMA-TS-Presence_SIMPLE-V1_1_1-20100225-A: "Presence SIMPLE Specification".
[143]	IETF RFC 6809: "Mechanism to Indicate Support of Features and Capabilities in the Session Initiation Protocol (SIP)".
[144]	IETF RFC 5839: "An Extension to Session Initiation Protocol (SIP) Events for Conditional Event Notification".
[145]	Void.
[146]	IETF RFC 3264: "An Offer/Answer Model with the Session Description Protocol (SDP)".

[147]	IETF RFC 4566: "SDP: Session Description Protocol".
[148]	3GPP TS 29.079: "Optimal Media Routeing within the IP Multimedia Subsystem; Stage 3".
[149]	3GPP TS 24.337: "IP Multimedia Subsystem (IMS) inter-UE transfer".
[150]	IETF RFC 3960: "Early Media and Ringing Tone Generation in the Session Initiation Protocol (SIP)".
[151]	IETF RFC 3550: "RTP: A Transport Protocol for Real-Time Applications".
[152]	IETF RFC 768: "User Datagram Protocol".
[153]	IETF RFC 3551: "RTP Profile for Audio and Video Conferences with Minimal Control".
[154]	IETF RFC 3556: "Session Description Protocol (SDP) Bandwidth Modifiers for RTP Control Protocol (RTCP) Bandwidth".
[155]	IETF RFC 4585: "Extended RTP Profile for Real-time Transport Control Protocol (RTCP)-Based Feedback (RTP/AVPF)".
[156]	IETF RFC 793: "Transmission Control Protocol".
[157]	IETF RFC 4733: "RTP Payload for DTMF Digits, Telephony Tones, and Telephony Signals".
[158]	IETF RFC 4916: "Connected Identity in the Session Initiation Protocol (SIP)".
[159]	3GPP TS 23.237: "IP Multimedia Subsystem (IMS) Service Continuity".
[160]	IETF RFC 6140: "Registration for Multiple Phone Numbers in the Session Initiation Protocol (SIP)".
[161]	IETF RFC 6230: "Media Control Channel Framework".
[162]	IETF RFC 4145: "TCP-Based Media Transport in the Session Description Protocol (SDP)".
[163]	3GPP TS 24.390: "Unstructured Supplementary Service Data (USSD)".
[164]	IETF RFC 6357: "Design Considerations for Session Initiation Protocol (SIP) Overload Control".
[165]	IETF RFC 7339: "Session Initiation Protocol (SIP) Overload Control".
[166]	IETF RFC 7415: "Session Initiation Protocol (SIP) Rate Control".
[167]	IETF RFC 7200: "A Session Initiation Protocol (SIP) Load-Control Event Package".
[168]	3GPP TS 29.163: "Interworking between the IP Multimedia (IM) Core Network (CN) subsystem and Circuit Switched (CS) networks".
[169]	IETF RFC 2046: "Multipurpose Internet Mail Extensions (MIME) Part Two: Media Types".
[170]	IETF RFC 2387: "The MIME Multipart/Related Content-type".
[171]	IETF RFC 3420: "Internet Media Type message/sipfrag".
[172]	IETF RFC 3842: "A Message Summary and Message Waiting Indication Event Package for the Session Initiation Protocol (SIP)".
[173]	IETF RFC 3858: "An Extensible Markup Language (XML) Based Format for Watcher Information".
[174]	IETF RFC 3863: "Presence Information Data Format (PIDF)".
[175]	IETF RFC 3994: "Indication of Message Composition for Instant Messaging".
[176]	IETF RFC 4661: "An Extensible Markup Language (XML) Based Format for Event Notification Filtering".

[177]	IETF RFC 4662: "A Session Initiation Protocol (SIP) Event Notification Extension for Resource Lists".
[178]	IETF RFC 4826: "Extensible Markup Language (XML) Formats for Representing Resource Lists".
[179]	IETF RFC 5262: "Presence Information Data Format (PIDF) Extension for Partial Presence".
[180]	IETF RFC 5874: "An Extensible Markup Language (XML) Document Format for Indicating a Change in XML Configuration Access Protocol (XCAP) Resources".
[181]	Void.
[182]	$OMA-SUP-XSD_prs_suppnotFilter-V1_0-20120710-A: "Presence-Event notification suppression filter".$
[183]	3GPP TS 32.240: "Telecommunication management; Charging management; Charging architecture and principles".
[184]	IETF RFC 7090: "Public Safety Answering Point (PSAP) Callback".
[185]	IETF RFC 8055: "Session Initiation Protocol (SIP) Via Header Field Parameter to Indicate Received Realm".
[186]	3GPP TS 29.658: "SIP Transfer of IP Multimedia Service Tariff Information".
[187]	3GPP TS 22.153: "Multimedia priority service".
[188]	IETF RFC 7549: "3GPP SIP URI Inter Operator Traffic Leg parameter".
[189]	3GPP TS 24.103: "Telepresence using the IP Multimedia (IM) Core Network (CN) Subsystem (IMS); Stage 3".
[190]	IETF draft-ietf-mmusic-sctp-sdp-15 (September 2015): "Stream Control Transmission Protocol (SCTP)-Based Media Transport in the Session Description Protocol (SDP)".
Editor's note: Th	ne above document cannot be formally referenced until it is published as an RFC.
[191]	3GPP TS 24.315: "IP Multimedia Subsystem (IMS) Operator Determined Barring (ODB)".
[192]	3GPP TR 29.949: "Study on Technical aspects on Roaming End-to-end scenarios with VoLTE IMS and other networks".
[193]	Void.
[194]	IETF RFC 7647: "Clarifications for the Use of REFER with RFC6665".
[195]	IETF RFC 7614: "Explicit Subscriptions for the REFER Method".
[196]	IETF RFC 7621: "A Clarification on the Use of Globally Routable User Agent URIs (GRUUs) in the Session Initiation Protocol SIP Event Notification Framework".
[197]	IETF draft-mohali-dispatch-originating-cdiv-parameter-03 (January 2017): "P-Served-User Header Field Parameter for Originating CDIV session case in Session Initiation Protocol (SIP)".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

example: text used to clarify abstract rules by applying them literally.

IM CN subsystem: (IP Multimedia CN subsystem) comprises of all CN elements for the provision of IP multimedia applications over IP multimedia sessions, as specified in 3GPP TS 22.228 [9].

IP multimedia session: as specified in 3GPP TS 22.228 [9] an IP multimedia session is a set of multimedia senders and receivers and the data streams flowing from senders to receivers. IP multimedia sessions are supported by the IP multimedia CN Subsystem and are enabled by IP connectivity bearers (e.g. GPRS as a bearer). A user can invoke concurrent IP multimedia sessions.

non-roaming II-NNI: the II-NNI between IMS home networks, or, if the Roaming Architecture for Voice over IMS with Local Breakout is used, alternatively the II-NNI between the caller's visited network and the callee's home network.

roaming II-NNI: the II-NNI between a visited IMS network and the IMS home network; for the Roaming Architecture for Voice over IMS with Local Breakout, the loopback traversal scenario is excluded.

loopback traversal scenario: for the Roaming Architecture for Voice over IMS with Local Breakout, the scenario where the II-NNI between the caller's home network and the caller's visited network is being traversed by an initial INVITE request from the caller's home network to the caller's visited network or any subsequent SIP message within the same dialogue on the same call leg.

home-to-visited request on roaming II-NNI: SIP request being sent from the callee's home network to the callee's visited network.

home routeing: the scenario when the caller's home network routes a dialog creating SIP request directly to the callee's home network without using the loopback traversal scenario.

visited-to-home request on roaming II-NNI: SIP request being sent from the caller's visited network to the caller's home network.

home-to-visited response on roaming II-NNI: SIP response being sent from the caller's home network to the caller's visited network.

visited-to-home response on roaming II-NNI: SIP response being sent from the callee's visited network to the callee's home network.

For the purposes of the present document, the following terms and definitions given in 3GPP TS 23.292 [120] apply:

MSC Server enhanced for ICS

For the purposes of the present document, the following terms and definitions given in 3GPP TS 23.237 [159] apply:

MSC server enhanced for SRVCC

For the purposes of the present document, the following terms and definitions given in 3GPP TS 24.237 [131] apply:

MSC server enhanced for dual radio

3.2 Symbols

For the purposes of the present document, the following symbols apply:

I2 Reference point between the MSC Server enhanced for ICS and the home IMS

Ici Reference Point between an IBCF and another IBCF belonging to a different IM CN subsystem

network

Izi Reference Point between a TrGW and another TrGW or media handling node belonging to a

different IM CN subsystem network

Mi Reference Point between a BGCF and CSCF

Mm Reference Point between a CSCF/BGCF/IMS ALG and an IP multimedia network

Mw Reference Point between a CSCF and another CSCF

Mx Reference Point between a CSCF/BGCF/MSC Server enhanced for ICS/ MSC Server enhanced

for SRVCC / MSC server enhanced for dual radio and IBCF

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

18x A SIP status-code in the range 180 through 189
2xx A SIP status-code in the range 200 through 299
3xx A SIP status-code in the range 300 through 399
4xx A SIP status-code in the range 400 through 499
6xx A SIP status-code in the range 600 through 699
ACR Anonymous Communication Rejection

AS Application Server

ATCF Access Transfer Control Function

B2BUA Back 2 Back User Agent

BGCF Breakout Gateway Control Function

CAT Customized Alerting Tone CB Communication Barring

CCBS Completion of Communications to Busy Subscriber

CCNR Communication Completion on No Reply

CDIV Communication Diversion
CRS Customized Ringing Signal
ECT Explicit Communication Transfer

FA Flexible Alerting
HOLD Communication HOLD
CW Communication Waiting

DRVCC Dual Radio Voice Call Continuity
IBCF Interconnection Border Control Function
ICB Incoming Communication Barring

ICID IMS Charging Identifier
ICS IMS Centralized Services
I-CSCF Interrogating CSCF

II-NNI Inter-IMS Network to Network Interface

IM Instant Messaging

IMS-ALG IMS Application Level Gateway

IOI Inter Operator Identifier IUT Inter UE Transfer

MCID Malicious Communication IDentification

MMTEL Multimedia Telephony
MPS Multimedia Priority Service
MRB Media Resource Broker

MRFC Media Resource Function Controller MRFP Multimedia Resource Function Processor

MSRP Message Session Relay Protocol MWI Message Waiting Indication

 $NA(P)T\text{-}PT \qquad \quad Network \ Address \ (Port\text{-}Multiplexing) \ Translation\text{-}Protocol \ Translation}$

NNI Network to Network Interface
OCB Outgoing Communication Barring
OIP Originating Identification Presentation
OIR Originating Identification Restriction

OMA Open Mobile Alliance OMR Optimal Media Routeing P-CSCF Proxy CSCF

PCRF Policy and Charging Rules Function PNM Personal Network Management

PRES Presence

RTT Round-trip Time

SRVCC Single Radio Voice Call Continuity

STN Session Transfer Number

TIP Terminating Identification Presentation
TIR Terminating Identification Restriction
TRF Transit and Roaming Function

TrGW Transition Gateway

vSRVCC Single Radio Video Call Continuity

4 Overview

Interconnection between two different IM CN subsystems shall be guaranteed in order to support end-to-end service interoperability. For this purpose, Inter-IMS Network to Network Interface (II-NNI) between two IM CN subsystem networks is adopted, according to the assumptions coming from 3GPP TS 23.002 [3] and 3GPP TS 23.228 [4].

NOTE: The end-to-end service interoperability within one IM CN subsystem over the Mi, Mm, Mw and I2 reference points not passing over the Mx reference point as defined in 3GPP TS 23.228 [4] is outside the scope of this document.

Aiming to support the delivery of IMS services between two separated IM CN subsystems, protocol interconnection has to occur:

- at a control plane level, in order that IMS procedures can be supported. In this case the adopted reference point is the Ici; and
- at a user plane level, where media streams are exchanged over the Izi reference point.

IP multimedia sessions are managed by SIP. The transport mechanism for both SIP session signalling and media transport is IPv4 (IETF RFC 791 [2]) or IPv6 (IETF RFC 2460 [7]). The 3GPP profile of SIP defining the usage of SIP within the IM CN subsystem is specified in 3GPP TS 24.229 [5]. Example call flows are provided in 3GPP TR 24.930 [6].

The general interconnection model is shown in figure 4.1.






Figure 4.1: Interconnection Model for IM CN subsystems

The II-NNI traversal scenarios in this document are covered in figure 4.2 and figure 4.3.

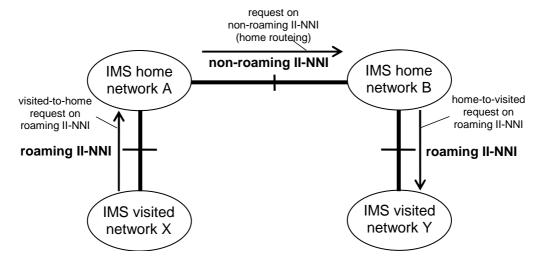

- NOTE 1: Any II-NNI can contain intermediate transit network(s). The intermediate transit network can either be an IMS transit network with or without a transit function as specified in TS 24.229 [5] or a non-IMS transit network using standards outside the scope of 3GPP.
- NOTE 2: IMS home network A and IMS home network B represent the IMS home network on originating side and terminating side respectively.
- NOTE 3: IMS visited network X and IMS visited network Y represent the IMS visited network on originating side and terminating side respectively.

Figure 4.2: II-NNI traversal scenarios when P-CSCF is located in visited network and when home routeing is used

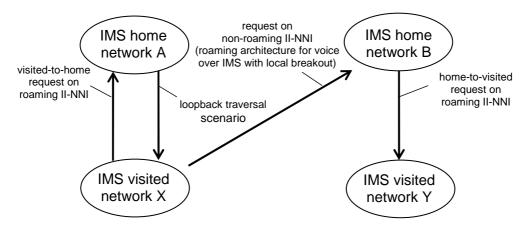

- NOTE 1: Any II-NNI can contain intermediate transit network(s). The intermediate transit network can either be an IMS transit network with or without a transit function as specified in TS 24 229 [5] or a non-IMS transit network using standards outside the scope of 3GPP.
- NOTE 2: IMS home network A and IMS home network B represent the IMS home network on originating side and terminating side respectively.
- NOTE 3: IMS visited network X and IMS visited network Y represent the IMS visited network on originating side and terminating side respectively.

Figure 4.3: II-NNI traversal scenarios when P-CSCF is located in visited network and when the roaming architecture for voice over IMS with local breakout is used

The possible functional entities involved in the signalling plane interconnection (IBCF, I-CSCF, P-CSCF, ATCF, S-CSCF, BGCF, MSC Server enhanced for ICS, MSC server enhanced for SRVCC, MSC server enhanced for dual radio and TRF) and in the user plane interconnection (TrGW) are specified in 3GPP TS 24.229 [5], in 3GPP TS 24.292 [121], 3GPP TS 29.292 [130], 3GPP TS 29.162 [8] and in 3GPP TS 24.237 [131].


IP Version interworking is described within 3GPP TS 29.162 [8].

Examples of usage of the Inter-IMS Network to Network Interface (II-NNI) for roaming scenarios are described in 3GPP TR 29.949 [192].

5 Reference model for interconnection between IM CN subsystems

5.1 General

Figure 5.1.1 illustrates the architecture diagram given in 3GPP TS 23.228 [4] showing the Inter-IMS Network to Network Interface (II-NNI) between two IM CN subsystem networks.

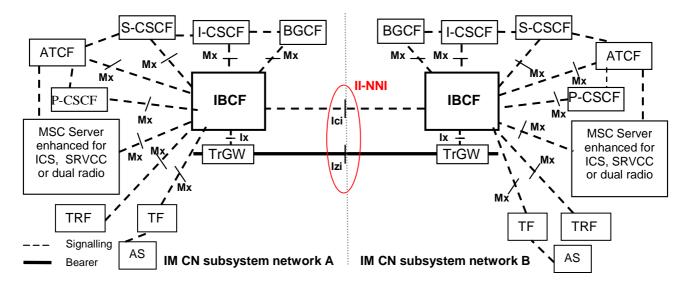

NOTE: The TRF can reside in a stand-alone entity or can be combined with another functional entity.

Figure 5.1.1: Inter-IMS Network to Network Interface between two IM CN subsystem networks

The protocols over the two reference points Ici and Izi make up the Inter-IMS Network to Network Interface.

The Ici reference point allows IBCFs to communicate with each other in order to provide the communication and forwarding of SIP signalling messaging between IM CN subsystem networks. The Izi reference point allows TrGWs to forward media streams between IM CN subsystem networks.

IMS roaming performed by using II-NNI is considered, when the IBCFs are inserted at the network borders. The applicability of roaming scenario by using II-NNI is based on agreement between the operators.

Whenever the Inter-IMS Network to Network Interface is used to interconnect two IM CN subsystem networks belonging to different security domains, security procedures apply as described in 3GPP TS 33.210 [10].

When an IMS transit network is providing application services and interconnecting two IM CN subsystem networks, as described in 3GPP TS 23.228 [4], interfaces on both sides of the IMS transit network are within the scope of this document.

5.2 Functionalities performed by entities at the edge of the network

5.2.1 Interconnection Border Control Function (IBCF)

An IBCF provides application specific functions at the SIP/SDP protocol layer in order to perform interconnection between IM CN subsystem networks by using Ici reference point. According to 3GPP TS 23.228 [4], IBCF can act both as an entry point and as an exit point for the IM CN subsystem network.

The functionalities of IBCF are indicated in the 3GPP TS 23.228 [4] and specified in 3GPP TS 24.229 [5]. They include:

- network topology hiding;
- application level gateway (for instance enabling communication between IPv6 and IPv4 SIP applications, or between a SIP application in a private IP address space and a SIP application outside this address space);
- controlling transport plane functions;
- controlling media plane adaptations;
- screening of SIP signalling information;
- selecting the appropriate signalling interconnect;
- generation of charging data records;
- privacy protection; and
- inclusion of a transit IOI in requests when acting as an entry point for a transit network and in responses when acting as an exit point for a transit network.

Based on local configuration, the IBCF performs transit routing functions as specified in 3GPP TS 24.229 [5] clause I.2.

The IBCF acts as a B2BUA when it performs IMS-ALG functionality.

5.2.2 Transition Gateway (TrGW)

According to 3GPP TS 23.002 [3], the TrGW is located at the network borders within the media path and is controlled by an IBCF. Forwarding of media streams between IM CN subsystem networks is applied over Izi reference point.

The TrGW provides functions like network address/port translation and IPv4/IPv6 protocol translation. NAT-PT binds addresses in IPv6 network with addresses in IPv4 network and vice versa to provide transparent routing between the two IP domains without requiring any changes to end points. NA(P)T-PT provides additional translation of transport identifier (TCP and UDP port numbers). The approach is similar to that one described also in 3GPP TS 29.162 [8].

Further details are described in 3GPP TS 23.228 [4].

5.3 Identifying II-NNI traversal scenario

5.3.1 General

The procedures for identifying the II-NNI traversal scenario using the "iotl" SIP URI parameter defined in IETF RFC 7549 [188] is specified in 3GPP TS 24.229 [5].

This specification uses the following II-NNI traversal scenarios when describing requirements at II-NNI:

- the non-roaming II-NNI traversal scenario;
- the roaming II-NNI traversal scenario; and
- the loopback II-NNI traversal scenario.

When a requirement at II-NNI is dependent on direction the roaming II-NNI traversal scenario is further divided into:

- the home-to-visited II-NNI traversal scenario; and
- the visited-to-home II-NNI traversal scenario.

See figure 4.2 and figure 4.3 for information on how the II-NNI traversal scenarios above are applied between networks.

5.3.2 Mapping of the "iotl" SIP URI parameter to II-NNI traversal scenario

Table 5.3.2.1 describes how the "iotl" SIP URI parameter shall be used to identify the II-NNI traversal scenario. The table 5.3.2.1 contains the following items:

- the first column, named "II-NNI traversal scenario", shows the II-NNI traversal scenarios within the scope of this specification; and
- the second column, named "Value of the "iotl" parameter", shows the value of the "iotl" SIP URI parameter as specified in IETF RFC 7549 [188].

Table 5.3.2.1: Mapping of the "iotl" SIP URI parameter to II-NNI traversal scenario

II-NNI traversal scenario	Value of the "iotl" parameter
Non-roaming II-NNI traversal scenario (NOTE 1)	"homeA-homeB" or "visitedA-homeB"
Loopback traversal scenario	"homeA-visitedA"
Roaming II-NNI traversal scenario	"visitedA-homeA" or "homeB-visitedB" (NOTE 2)
Home-to-visited traversal scenario	"homeB-visitedB"
Visited-to-home traversal scenario	"visitedA-homeA"

- NOTE 1: This is the default II-NNI traversal scenario, if the "iotl" SIP URI parameter is not present in the Request-URI or in any of the Route header fields in the SIP request and if an implementation dependent method of identifying the II-NNI traversal scenario is not used.
- NOTE 2: When the requirement at II-NNI is independent on direction any of the "visitedA-homeA" or "homeB-visitedB" can be used to identify the roaming II-NNI traversal scenario.

6 Control plane interconnection

6.1 Definition of Inter-IMS Network to Network Interconnection

6.1.1 SIP methods and header fields

6.1.1.1 General

The functional entity closest to the border of an II-NNI (see reference model in clause 5) shall provide the capabilities specified for that network element in clause A.2 of 3GPP TS 24.229 [5] with modifications as described in the following clauses.

6.1.1.2 SIP methods

3GPP TS 24.229 [5] defines the methods allowing an IBCF to interconnect to an IBCF placed in another IM CN subsystem.

The following SIP methods are supported on the II-NNI as defined in table 6.1.

The following table is based on table A.5 and table A.163 of 3GPP TS 24.229 [5] and endorsed for this document:

Table 6.1: Supported SIP methods

				NNI	
			Sending	Receiving	
1	ACK request	IETF RFC 3261 [13]	m	m	
2	BYE request	IETF RFC 3261 [13]	m	m	
3	BYE response	IETF RFC 3261 [13]	m	m	
4	CANCEL request	IETF RFC 3261 [13]	m	m	
5	CANCEL response	IETF RFC 3261 [13]	m	m	
5A	INFO request	IETF RFC 6086 [39]	0	0	
5B	INFO response	IETF RFC 6086 [39]	0	0	
8	INVITE request	IETF RFC 3261 [13]	m	m	
9	INVITE response	IETF RFC 3261 [13]	m	m	
9A	MESSAGE request	IETF RFC 3428 [19]	0	0	
9B	MESSAGE response	IETF RFC 3428 [19]	0	0	
10	NOTIFY request	IETF RFC 6665 [20]	c1	c1	
11	NOTIFY response	IETF RFC 6665 [20]	c1	c1	
12	OPTIONS request	IETF RFC 3261 [13]	m	m	
13	OPTIONS response	IETF RFC 3261 [13]	m	m	
14	PRACK request	IETF RFC 3262 [18]	m	m	
15	PRACK response	IETF RFC 3262 [18]	m	m	
15A	PUBLISH request	IETF RFC 3903 [21]	c1	c1	
15B	PUBLISH response	IETF RFC 3903 [21]	c1	c1	
16	REFER request	IETF RFC 3515 [22]	0	0	
17	REFER response	IETF RFC 3515 [22]	0	0	
18	REGISTER request	IETF RFC 3261 [13]	c2	c2	
19	REGISTER response	IETF RFC 3261 [13]	c2	c2	
20	SUBSCRIBE request	IETF RFC 6665 [20]	c1	c1	
21	SUBSCRIBE response	IETF RFC 6665 [20]	c1	c1	
22	UPDATE request	IETF RFC 3311 [23]	m	m	
23	UPDATE response IETF RFC 3311 [23] m m				
c1:	In case of roaming II-NNI, the support of the method is m, else o.				
c2:	In case of roaming II-NNI, the support of the method is m, else n/a.				

6.1.1.3 SIP header fields

6.1.1.3.0 General

The IBCF shall provide the capabilities to manage and modify SIP header fields according to clause 5.10 and annex A of 3GPP TS 24.229 [5] with modifications as described in the following clauses.

6.1.1.3.1 Trust and no trust relationship

The IBCF acting as exit point applies the procedures described in clause 5.10.2 of 3GPP TS 24.229 [5] before forwarding the SIP signalling to the IBCF acting as entry point. The IBCF acting as entry point applies the procedures described in clause 5.10.3 of 3GPP TS 24.229 [5].

Additionally, in case there is no trust relationship between the two IM CN subsystems connected by II-NNI, the IBCF applies the procedures described in clause 4.4 of 3GPP TS 24.229 [5], before forwarding the SIP signalling.

These procedures may be utilized on a per header field basis to realize overall trust as well as per service level screening of header fields. Trust relationships and trust domains may be defined by inter-operator agreements for individual services and/or individual SIP header fields.

The management of the SIP header fields (if present) over II-NNI in case of a presence or not of a trust relationship between the two interconnected IM CN subsystems is wrapped up in the following table.

Table 6.2: Management of SIP header fields and parameters over II-NNI in presence or not of a trust relationship

Item	Header field or parameter	Reference	Trust relationship	Not trust relationship
1	P-Asserted-Identity	IETF RFC 3325 [44]	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
2	P-Access-Network- Info	IETF RFC 7315 [24]	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
3	Resource-Priority	IETF RFC 4412 [78]	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
4	History-Info	IETF RFC 7044 [25]	As specified in TS 24.229 [5], clause 4.4	As specified in clause 7 of IETF RFC 7044 [25] and in TS 24.229 [5], clause 4.4
5	P-Asserted-Service	IETF RFC 6050 [26]	As specified in TS 24.229 [5], clause 4.4 (NOTE 3)	As specified in TS 24.229 [5], clause 4.4 (NOTE 3)
6	P-Charging-Vector	IETF RFC 7315 [24]	As specified in TS 24.229 [5], clause 5.10	As specified in TS 24.229 [5], clause 5.10
7	P-Charging-Function- Addresses (NOTE 4)	IETF RFC 7315 [24]	As specified in TS 24.229 [5], clause 5.10	As specified in TS 24.229 [5], clause 5.10
8	P-Profile-Key (NOTE 2)	IETF RFC 5002 [64]	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
9	P-Private-Network- Indication	IETF RFC 7316 [84]	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
10	P-Served-User (NOTE 1, NOTE 2)	IETF RFC 5502 [85]	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
11	Reason (in a response)	IETF RFC 6432 [49]	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
12	P-Early-Media	IETF RFC 5009 [74]	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
13	Feature-Caps	IETF RFC 6809 [14 3]	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
14	Priority (NOTE 6)	IETF RFC 7090 [18 4]	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
15	"iotl" SIP URI parameter (NOTE 7)	IETF RFC 7549 [18 8]	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
16	"cpc" tel URI parameter (NOTE 5)	TS 24.229 [5] clause 7.2A.12	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
17	"oli" tel URI parameter (NOTE 5)	TS 24.229 [5] clause 7.2A.12	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
18	Restoration-Info (NOTE 2)	TS 24.229 [5] clause 7.2.11	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4
19	Relayed-Charge (NOTE 4)	TS 24.229 [5] clause 7.2.12	As specified in TS 24.229 [5], clause 4.4	As specified in TS 24.229 [5], clause 4.4

- NOTE 1: For a roaming II-NNI, a trust relationship with respect to this header field is required.
- NOTE 2: This header field is only applicable on a roaming II-NNI.
- NOTE 3: In addition, value-dependent operator policies may be applied.
- NOTE 4: This header field is not applicable at II-NNI.
- NOTE 5: The tel URI parameters "cpc" and "oli" can be included in the URI in the P-Asserted-Identity header field.
- NOTE 6: Only the "psap-callback" value is part of the trust domain.
- NOTE 7: The "iotl" SIP URI parameter can be transported in the Request-URI, Route header field, Path header field, Service-Route header field, "+g.3gpp.trf" header field parameter, "+g.3gpp.atcf-mgmt-uri" header field parameter and in the "ATU-STI" parameter in the "application/vnd.3gpp.srvcc-info+xml" MIME body.

6.1.1.3.2 Derivation of applicable SIP header fields from TS 24.229 [5]

For any method in table 6.1, the SIP header fields applicable on the II-NNI are detailed in the corresponding method tables for the UA role and proxy role sending behaviour in annex A of 3GPP TS 24.229 [5]. Unless other information is specified in the normative part of the present specification, the applicability of header fields at the II-NNI can be derived for each method from the corresponding tables in annex A of 3GPP TS 24.229 [5] as follows:

- All header fields not present in the corresponding tables in annex A of 3GPP TS 24.229 [5] or marked as "n/a" in both the "RFC status" and "profile status" columns for the UA role and proxy role sending behaviour of that tables are not applicable at the II-NNI.

NOTE 1: Operators could choose to apply header fields for other SIP extensions on an II-NNI based on bilateral agreements, but this is outside the scope of the present specification.

- All header fields which are marked as "o" in at least one of the "RFC status" or the "profile status" profile columns for the sending behaviour in the corresponding UA role and proxy role tables in annex A of 3GPP TS 24.229 [5] and as "n/a" or "o" in the other such columns are applicable at II-NNI based on bilateral agreement between operators.
- All header fields which are marked as "m" in at least one of the "RFC status" or the "profile status" columns for the sending behaviour in the corresponding UA role or proxy role table in annex A of 3GPP TS 24.229 [5] and as "n/a", "o", or "m" in the other such columns are applicable at the II-NNI.
- If conditions are specified, they are also applicable at the II-NNI and the above rules are applicable to the "n/a", "o" and "m" values within the conditions.

NOTE 2: In the above rules, the RFC profile columns are taken into account in order to enable interworking with non-3GPP networks.

An informative summary of SIP header fields to be used over the II-NNI is proposed in annex A.

6.1.1.3.3 Applicability of SIP header fields on a roaming II-NNI

The following SIP header fields are only applicable on a roaming II-NNI:

- Authentication-Info
- Authorization
- P-Associated-URI
- P-Called-Party-ID
- P-Preferred-Service
- P-Profile-Key
- P-Served-User
- P-Visited-Network-ID
- Path
- Proxy-Authenticate
- Proxy-Authorization
- Restoration-Info
- Service-Route
- WWW-Authenticate

6.1.1.3.4 Applicability of SIP header fields on a non-roaming II-NNI

The following SIP header fields are only applicable on a non-roaming II-NNI:

- P-Refused-URI-List

6.1.1.4 Notations of the codes

In the table 6.1 the status codes "m", "o", "c" and "n/a" have the following meanings:

Receiving side **Notation** Notation name Sending side code The message shall be supported at II-Supporting receiving a SIP message at mandatory the II-NNI means that this message shall Supporting sending a SIP message at be forwarded to the serving network the II-NNI means that this message shall unless the operator's policy is applied as be sent over the II-NNI if received from defined in clause 5.10.1 of TS 24.229 [5]. It does not imply that the serving network. It does not imply that network elements inside the serving network elements inside the serving network or user equipment connected to network or user equipment connected to this network shall support this message. this network are supporting this message. The message may or may not be O optional Same as for sending side. supported at II-NNI. The support of the message is provided based on bilateral agreement between the operators. not applicable It is impossible to use/support the n/a It is impossible to use/support the message. message. This message will be discarded by the IBCF. conditional The requirement on the message ("m", Same as for sending side. "o" or "n/a") depends on the support of <integer> other optional or conditional items. <integer> is the identifier of the conditional expression.

Table 6.3: Key to notation codes for SIP messages

6.1.1.5 Modes of signalling

Overlap signalling may be used if agreement exists between operators to use overlap and which method to be used, otherwise enbloc shall be used at the II-NNI.

6.1.2 SDP protocol

6.1.2.1 General

The functional entity closest to the border of an II-NNI (see reference model in clause 5) shall provide the capabilities specified for that network element in clause A.3 of 3GPP TS 24.229 [5].

The "application/sdp" MIME bodies shall be encoded as described in IETF RFC 3261 [13] and in IETF RFC 4566 [147].

The offer/answer model with the SDP as defined in IETF RFC 3264 [146] shall be applied.

The procedures and the SDP rules as defined in IETF RFC 4145 [162] may be applied if media streams with TCP is used.

6.1.3 Major capabilities

This clause contains the major capabilities to be supported over the II-NNI.

The table 6.1.3.1 specifies which capabilities are applicable for II-NNI. The profile status codes within table 6.1.3.1 are defined in table 6.1.3.2.

For the "Basic SIP" capabilities part of table 6.1.3.1, the last column "Profile status over II-NNI" specifies the general status of applicability of the IETF RFC 3261 [13] main mechanisms described in the 2nd column "Capability over the Ici".

For the "Extensions to basic SIP" capabilities part, the last column "Profile status over II-NNI" specifies the general status of applicability of the RFC referenced in the 2^{nd} column "Capability over the Ici".

If necessary, the applicability of RFCs at the II-NNI level is further detailed in the present Technical Specification.

The columns "Reference item in 3GPP TS 24.229 [5] for the profile status" provide informative references for comparison purposes into the UA and Proxy role major capabilities tables in 3GPP TS 24.229 [5], where the capabilities are defined via additional references.

Table 6.1.3.1: Major capabilities over II-NNI

Item	Capability over the Ici	Reference item in TS 24.229 [5] for the profile status		Profile status over II-NNI
		UA Role (NOTE 1)	Proxy role (NOTE 2)	
	Basic SIP (IETF RFC 3261 [13])			
1	registrations	1, 2, 2A	-	c2
2	initiating a session	2B, 3, 4	-	m
3	terminating a session	5	3	m
4	General proxy behaviour	-	4, 5, 14, 15	n/a
5	Managing several responses due to forking	9,10	6	m
6	support of indication of TLS connections in the Record-Route header	-	7, 8	n/a
7	Support of authentication	7, 8, 8A	8A	c2
8	Timestamped requests (Timestamp header field)	6	-	m
9	Presence of date in requests and responses (Date header field)	11	9	m
10	Presence of alerting information data (Alert-info header field)	12	10	0
11	Support and handling of the Require header field for REGISTER and other requests or responses for methods other than REGISTER	-	11, 12, 13	m
12	Support and reading of the Supported and Unsupported header fields	-	16, 17, 18	m
13	Support of the Error-Info header field in 3xx - 6xx responses	-	19	0
14	Support and handling of the Organization header field	-	19A, 19B	m
15	Support and handling of the Call-Info header field	-	19C, 19D	m
16	Support of the Contact header field in 3xx response	-	19E	m
16A	Proxy reading the contents of a body or including a body in a request or response	-	19F	n/a
	Extensions to basic SIP			
16B	TS 24.237 [131]: proxy modifying the content of a body	-	19G	n/a
17	IETF RFC 6086 [39]: SIP INFO method and package framework	13	20	0
17A	IETF RFC 6086 [39]: legacy INFO usage	13A	20A	0
18	IETF RFC 3262 [18]: reliability of provisional responses in SIP (PRACK method)	14	21	m
19	IETF RFC 3515 [22]: the SIP REFER method	15	22	0
19A	IETF RFC 7647 [194]: Clarifications for the Use of REFER with RFC6665	15A	22A	n/a
19B	IETF RFC 7614 [195]: Explicit Subscriptions for the REFER Method	15B	22B	0
20	IETF RFC 3312 [40] and IETF RFC 4032 [41]: integration of resource management and SIP (Preconditions framework)	2C, 16	23	0
21	IETF RFC 3311 [23]: the SIP UPDATE method	17	24	m
22	IETF RFC 3313 [42]: SIP extensions for media authorization (P-Media-Authorization header field)	19	26	n/a
23	IETF RFC 6665 [20]: SIP specific event notification (SUBSCRIBE/NOTIFY methods)	20, 22, 23	27	c1
23A	IETF RFC 7621 [196]: A Clarification on the Use of Globally Routable User Agent URIs (GRUUs) in the Session Initiation Protocol SIP Event Notification Framework	22A	28	n/a
24	IETF RFC 3327 [43]: session initiation protocol extension header field for registering non-adjacent contacts (Path header field)	24	29	c2
25	IETF RFC 3325 [44]: private extensions to the Session Initiation Protocol (SIP) for network asserted identity within trusted networks	25	30	c4
26	IETF RFC 3325 [44]: the P-Preferred-Identity header field extension	-	-	n/a
27	IETF RFC 3325 [44]: the P-Asserted-Identity header field extension	-	-	c4
28	IETF RFC 3323 [34]: a privacy mechanism for the Session Initiation Protocol (SIP) (Privacy header field)	26, 26A, 26B, 26C, 26D, 26E, 26F, 26G, 26H	31, 31A, 31B, 31C, 31D, 31E, 31F, 31G, 31H	m

ETF RFC 3428 [19]: a messaging mechanism for the Session initiation protocol (SIP) (MESSAGE method) 28 32 c2 header field for service route discovery during registration (Service-Route header field) 1 ETF RFC 3496 [46] compressing the session initiation 29 34 n/a 1 ETF RFC 3496 [46] compressing the session initiation 29 34 n/a 20 2 ETF RFC 3496 [46] compressing the session initiation 29 34 n/a 20 2 ETF RFC 3496 [46] compressing the session initiation protocol for the 3"-Generation Partnership 30 35 0 35 0 35 0 35 30 35 30 30					
BETF RFC 3008 [45]: session initiation protocol extension 28 32 c2 header field for service route discovery during registration Service-Route header field	29		27	33	0
Service-Route header field	30	IETF RFC 3608 [45]: session initiation protocol extension	28	32	c2
IETF RFC 3486 [46]: compressing the session initiation protocol Protocol					
session initiation protocol for the 3"-LGeneration Partnership Project (3GPP) 32A IETF RFC 3325 [44]: act as first entity within the trust domain for asserted identity 32B IETF RFC 3325 [44]: act as entity within trust network that can route outside the trust network 32C IETF RFC 3325 [44]: act as entity passing on identity 30C 30C n/a 33 IETF RFC 735 [24] and IETF RFC 7976 [24A]: the P- 31 36 c2 34 Sesociated-URI header field extension 35 IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P- 32 37 c2 36 IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P- 32 37 c2 37 C2 Called-Party-ID header field extension 38 IETF RFC 7315 [24] and IETF RFC 7976 [24A] and IETF RFC 3329 [47] security mechanism agreement for the session initiation protocol 39 IETF RFC 3329 [47] security mechanism agreement for the session initiation protocol 40 IETF RFC 3329 [48]: the Reason header field for the session initiation protocol 41 IETF RFC 3326 [48]: the Reason header field for the session initiation protocol 42 IETF RFC 3326 [36]: the Session Initiation Protocol (responses routeing protocol for symmetric response routeing protocol (RUBLISH method) 43 IETF RFC 3841 [56]: the Session Initiation Protocol	31	IETF RFC 3486 [46]: compressing the session initiation	29	34	n/a
session initiation protocol for the 3"-Generation Partnership Project (3GPP) 32A IETF RFC 3325 [44]: act as first entity within the trust domain for asserted identity 32B IETF RFC 3325 [44]: act as entity within trust network that can route outside the trust network 32C IETF RFC 3325 [44]: act as entity passing on identity 30C 30C n/a 33C IETF RFC 3325 [44]: act as entity passing on identity 30C 30C n/a 33 IETF RFC 3325 [44]: act as entity passing on identity 30C 30C n/a 34 IETF RFC 3325 [44]: and IETF RFC 7976 [24A]: the P- Associated-URI header field extension 35 IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P- Called-Party-ID header field extension 36 IETF RFC 7315 [24] and IETF RFC 7976 [24A] and 37 IETF RFC 7315 [24] and IETF RFC 7976 [24A] and 38 IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P- Charging-Function-Addresses header field extension 38 IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P- Charging-Function-Addresses header field extension 39 IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P- Charging-Function-Addresses header field extension 39 IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P- Charging-Function-Addresses header field extension 39 IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P- Charging-Function-Addresses header field extension 39 IETF RFC 3329 [47]: security mechanism agreement for the session initiation protocol 40 IETF RFC 3326 [48]: the Reason header field for the session initiation protocol 41 IETF RFC 3326 [48]: the Reason header field for the session initiation protocol 42 IETF RFC 3326 [36]: see Session initiation 44 PR C 3326 [48]: the Reason header field for the session initiation protocol (Acept-Contact, Reject-Contact and 40 PR C 3428 [5] clause preferences for the session initiation protocol (Acept-Contact, Reject-Contact and 40 PR C 3428 [5] clause preferences for the session initiation 40 PR C 3428 [54]: the Session Initiation Protocol (SIP) 41 IETF RFC 3481 [58]: select the Session Initiation 42 IETF RFC 3481 [58]: select Session Initiation 43 IETF RF	32	IETF RFC 7315 [24]: private header extensions to the	30	35	0
Project (3GPP) 32A IETE RFC 3325 [44]: act as entity within the trust domain for asserted identity for asserted identity of the season and active to the season initiation protocol for symmetric response rottled in the resonance and active to the season initiation protocol (PuBLISH method) 4. IETE RFC 3326 [44]: act as entity within trust network that can route outside the trust network that can route outside the trust network and active the season and active to the season initiation protocol (PuBLISH method) 3. IETE RFC 7315 [24] and IETE RFC 7976 [24A]: the P- 31					
Second Color Seco					
for asserted identity 28B EFF RFC 3325 [44]; act as entity within trust network that 20B 30B 7/a 22B EFF RFC 3325 [44]; act as entity passing on identity 30C 30C 7/a 30C 30C 30C 7/a 30C 30	32A		30A	30A	n/a
1					
can route outside the trust network 202 CIFF RFC 3325 441, act as entity passing on identity transparently independent of trust domain 30C 30C n/a	32B		30B	30B	n/a
Second S					
transparently independent of trust domain 33 IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P- 32 37 c2 Called-Party-ID header field extension 32 37 c2 Called-Party-ID header field extension 33 38, 39 c2 Called-Party-ID header field extension 35 IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P- 33 38, 39 c2 Visited-Network-ID header field extension 34 41, 42, 43 c4 IETF RFC 7315 [24] in IETF RFC 7976 [24A] and IETF RFC 7315 [24]: IETF RFC 7976 [24A] and IETF RFC 7315 [24]: IETF RFC 7976 [24A] and IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P- 35 44, 44A n/a Charging-Function-Addresses header field extension 36 IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P- 36 45, 46 c1 Charging-Function-Addresses header field extension 37 47 n/a session initiation protocol 37 IETF RFC 3329 [47]: security mechanism agreement for the session initiation protocol 37 47 n/a 17 18 18 18 18 18 18 18	32C	IETF RFC 3325 [44]: act as entity passing on identity	30C	30C	n/a
Second S					
Associated-URI header field extension 34	33	IETF RFC 7315 [24] and IETF RFC 7976 [24A]; the P-	31	36	c2
Second S					
Called-Party-ID header field extension STATE	34		32	37	c2
Section				_	_
Visited-Network-ID header field extension	35		33	38, 39	c2
IETF RFC 7315 [24], IETF RFC 7976 [24A] and IETF RFC 7913 [24B]: the P-Access-Network-Info header field extension IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P-Access-Network-Info header field extension IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P-Access-Network-Info header field extension IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P-Access-Network-Info header field extension IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P-Access-Network-Info header field extension IETF RFC 7315 [24] and IETF RFC 7976 [24A]: the P-Access-Network-Info header field extension IETF RFC 3329 [47]: security mechanism agreement for the session initiation protocol IETF RFC 3326 [48]: the Reason header field for the session IETF RFC 3326 [48]: the Reason header field for the session IETF RFC 3326 [48]: the Reason header field for the session IETF RFC 3326 [48]: the Reason header field for the session IETF RFC 3458 [49]: carrying Q.850 codes in reason header fields in SIP (Session Initiation Protocol) responses IETF RFC 3458 [50]: an extension to the session initiation IETF RFC 3451 [50]: an extension to the session Initiation protocol (Accept-Contact, Reject-Contact and Access and A				55, 55	-
IETF RFC 7913 [24B]: the P-Access-Network-Info header field extension Start FRC 7315 [24] and IETF RFC 7976 [24A]: the P-Charging-Function-Addresses header field extension Start FRFC 7315 [24] and IETF RFC 7976 [24A]: the P-Charging-Vector header field extension Start FRFC 7315 [24] and IETF RFC 7976 [24A]: the P-Charging-Vector header field extension Start FRFC 3329 [47]: security mechanism agreement for the Start FRFC 3329 [47]: security mechanism agreement for the Start FRFC 3329 [47]: security mechanism agreement for the Start FRFC 3329 [47]: security mechanism agreement for the Start FRFC 3329 [47]: security mechanism agreement for the Start FRFC 3329 [47]: security mechanism agreement for the Start FRFC 3329 [47]: security mechanism agreement for the Start FRFC 3329 [47]: security Exchange for Media Start FRFC 3326 [48]: the Reason header field for the session Start FRFC 3326 [48]: the Reason header field for the session Start FRFC 3432 [49]: carrying Q.850 codes in reason header fields in SIP (Session Initiation Protocol) responses Start FRFC 3581 [50]: an extension to the session initiation Start FRFC 3581 [50]: an extension to the session initiation Start FRFC 3841 [51]: caller preferences for the session 40, 40A, 40B, 40C, 40B,	36		34	41, 42, 43	c4
Field extension	00			11, 12, 10	
STEPHENE Care Stephene St					
Charging-Function-Addresses header field extension Section	37		35	44 44A	n/a
Second Part	0.			,	, ~
Charging-Vector header field extension 3P IETF RFC 3329 [47]: security mechanism agreement for the session initiation protocol 3PA TS 24.229 [5] clause 7.2A.7: Capability Exchange for Media Plane Security 40 IETF RFC 3326 [48]: the Reason header field for the session initiation protocol 41 IETF RFC 3326 [48]: the Reason header field for the session initiation protocol 42 IETF RFC 6432 [49]: carrying Q.850 codes in reason header fields in SIP (Session Initiation Protocol) responses 42 IETF RFC 3581 [50]: an extension to the session initiation protocol for symmetric response routeing protocol for symmetric response routeing initiation protocol (Accept-Contact, Reject-Contact and Request-Disposition header fields) 43 IETF RFC 3930 [21]: an event state publication extension to the session initiation protocol (Accept-Contact, Reject-Contact and Request-Disposition header fields) 44 IETF RFC 3930 [21]: an event state publication extension to the session initiation protocol (PUBLISH method) 45 IETF RFC 4028 [52]: SIP session timer (Session-Expires and Min-SE headers) 46 IETF RFC 3891 [54]: the SIP Referred-By mechanism 43 53 m 47 IETF RFC 3891 [54]: the Session Initiation Protocol (SIP) "Replaces" header 48 IETF RFC 3911 [55]: the Session Initiation Protocol (SIP) "Solin header field) 49 IETF RFC 3911 [55]: the Session Initiation Protocol (SIP) 45 55 0 IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field) 50 IETF RFC 7044 [25]: the "mp" header field parameter 47A 57A 0 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)	38		36	45 46	c1
Session initiation protocol Session initiation Session initiation Session initiation Session S	00			10, 10	
session initiation protocol Plane Security 40 IETF RFC 3326 [48]: the Reason header field for the session initiation protocol IETF RFC 6432 [49]: carrying Q.850 codes in reason header fields in SIP (Session Initiation Protocol) responses 41 IETF RFC 6432 [49]: carrying Q.850 codes in reason header fields in SIP (Session Initiation Protocol) responses 42 IETF RFC 6432 [49]: carrying Q.850 codes in reason header fields in SIP (Session Initiation Protocol) responses 43 IETF RFC 3841 [51]: caller preferences for the session initiation protocol for symmetric response routeing protocol for symmetric response routeing protocol for symmetric response routeing fields in SIP (Session Initiation protocol (Accept-Contact, Reject-Contact and Request-Disposition header fields) 43 IETF RFC 3841 [51]: caller preferences for the session initiation protocol (Accept-Contact, Reject-Contact and Request-Disposition header fields) 44 IETF RFC 3903 [21]: an event state publication extension to the session initiation protocol (PUBLISH method) 45 IETF RFC 4028 [52]: SIP session timer (Session-Expires and Min-SE headers) 46 IETF RFC 3892 [53]: the SIP Referred-By mechanism protocol (SIP) (Session Header Session Initiation Protocol (SIP) (Session Header Session Header Session Initiation Protocol (SIP) (Session Header Session Header Session Header Session Initiation Protocol (SIP) (Session Header Session Header S	30		37	47	n/a
TS 24.229 [5] clause 7.2A.7: Capability Exchange for Media Plane Security	00		01	"'	11/α
Plane Security	39A		37A	47A	n/a
IETF RFC 3326 [48]: the Reason header field for the session initiation protocol	00/1		0170	7//	Ι Ι/α
IETF RFC 6432 [49]: carrying Q.850 codes in reason header fields in SIP (Session Initiation Protocol) responses 38A			48	0	
IETF RFC 6432 [49]: carrying Q.850 codes in reason header fields in SIP (Session Initiation Protocol) responses 38A	40		30	1-0	
fields in SIP (Session Initiation Protocol) responses 42 IETF RFC 3581 [50]: an extension to the session initiation protocol for symmetric response routeing 43 IETF RFC 3841 [51]: caller preferences for the session initiation protocol (Accept-Contact, Reject-Contact and initiation protocol (Accept-Contact, Reject-Contact and Request-Disposition header fields) 44 IETF RFC 3903 [21]: an event state publication extension to the session initiation protocol (PUBLISH method) 45 IETF RFC 4028 [52]: SIP session timer (Session-Expires and Min-Se headers) 46 IETF RFC 3891 [54]: the SIP Referred-By mechanism 47 IETF RFC 3891 [54]: the Session Initiation Protocol (SIP) "Replaces" header 48 IETF RFC 3911 [55]: the Session Initiation Protocol (SIP) "Join" header 49 IETF RFC 3840 [56]: the callee capabilities 46 56 0 16 IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field) 50A IETF RFC 7044 [25]: the "mp" header field parameter 47A 57A 0 50B IETF RFC 7044 [25]: the "mp" header field parameter 47C 57C 0 51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)	41			c4	
IETF RFC 3581 [50]: an extension to the session initiation protocol for symmetric response routeing 39					
protocol for symmetric response routeing 43 IETF RFC 3841 [51]: caller preferences for the session initiation protocol (Accept-Contact, Reject-Contact and Request-Disposition header fields) 44 IETF RFC 3903 [21]: an event state publication extension to the session initiation protocol (PUBLISH method) 45 IETF RFC 4028 [52]: SIP session timer (Session-Expires and Min-SE headers) 46 IETF RFC 3891 [54]: the SIP Referred-By mechanism 47 IETF RFC 3991 [54]: the Session Initiation Protocol (SIP) "Replaces" header 48 IETF RFC 3911 [55]: the Session Initiation Protocol (SIP) "Join" header 49 IETF RFC 3840 [56]: the callee capabilities 46 56 0 IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field) 50A IETF RFC 7044 [25]: the "mp" header field parameter 50B IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter 50C IETF RFC 7044 [25]: the "mp" header field parameter	42			0	
IETF RFC 3841 [51]: caller preferences for the session initiation protocol (Accept-Contact, Reject-Contact and Request-Disposition header fields)					
initiation protocol (Accept-Contact, Reject-Contact and Request-Disposition header fields) 40B, 40C, 40D, 40E, 50D, 50E, 50F 41 IETF RFC 3903 [21]: an event state publication extension to the session initiation protocol (PUBLISH method) 45 IETF RFC 4028 [52]: SIP session timer (Session-Expires and Min-SE headers) 46 IETF RFC 3892 [53]: the SIP Referred-By mechanism 43 53 m 47 IETF RFC 3891 [54]: the Session Initiation Protocol (SIP) 44 54 0 m Replaces" header 48 IETF RFC 3891 [55]: the Session Initiation Protocol (SIP) 45 55 0 m Join" header 49 IETF RFC 3840 [56]: the callee capabilities 46 56 0 m 50 IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field) parameter 47A 57A 0 m 50A IETF RFC 7044 [25]: the "mp" header field parameter 47B 57B 0 m 50C IETF RFC 7044 [25]: the "rc" header field parameter 47C 57C 0 m 51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)	43			50, 50A,	m
Request-Disposition header fields) 40D, 40E, 40F 50F 41 IETF RFC 3903 [21]: an event state publication extension to the session initiation protocol (PUBLISH method) 45 IETF RFC 4028 [52]: SIP session timer (Session-Expires and Min-SE headers) 46 IETF RFC 3892 [53]: the SIP Referred-By mechanism 47 IETF RFC 3891 [54]: the Session Initiation Protocol (SIP) "Replaces" header 48 IETF RFC 3811 [55]: the Session Initiation Protocol (SIP) "Join" header 49 IETF RFC 3840 [56]: the callee capabilities 50 IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field) 50A IETF RFC 7044 [25]: the "mp" header field parameter 50B IETF RFC 7044 [25]: the "rc" header field parameter 50C IETF RFC 7044 [25]: the "rc" header field parameter 47C 57C 57C 58 O Session initiation protocol FETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)					
SOF SOF AU SOF					
IETF RFC 3903 [21]: an event state publication extension to the session initiation protocol (PUBLISH method) 41		,			
the session initiation protocol (PUBLISH method) 45 IETF RFC 4028 [52]: SIP session timer (Session-Expires and Min-SE headers) 46 IETF RFC 3892 [53]: the SIP Referred-By mechanism 43 53 m 47 IETF RFC 3891 [54]: the Session Initiation Protocol (SIP) 44 54 o "Replaces" header 48 IETF RFC 3911 [55]: the Session Initiation Protocol (SIP) 45 55 o "Join" header 49 IETF RFC 3840 [56]: the callee capabilities 46 56 o 50 IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field) 50A IETF RFC 7044 [25]: the "mp" header field parameter 47A 57A o 50B IETF RFC 7044 [25]: the "rc" header field parameter 47B 57B o 50C IETF RFC 7044 [25]: the "rc" header field parameter 47C 57C o 51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)	44	IETF RFC 3903 [21]: an event state publication extension to			c1
45 IETF RFC 4028 [52]: SIP session timer (Session-Expires and Min-SE headers) 46 IETF RFC 3892 [53]: the SIP Referred-By mechanism 47 IETF RFC 3891 [54]: the Session Initiation Protocol (SIP) 48 IETF RFC 3911 [55]: the Session Initiation Protocol (SIP) 49 IETF RFC 3840 [56]: the callee capabilities 40 IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field) 47 57 0 48 IETF RFC 7044 [25]: the "mp" header field parameter field parameter field) 49 IETF RFC 7044 [25]: the "mp" header field parameter fi					
Min-SE headers) 46 IETF RFC 3892 [53]: the SIP Referred-By mechanism 47 IETF RFC 3891 [54]: the Session Initiation Protocol (SIP) "Replaces" header 48 IETF RFC 3911 [55]: the Session Initiation Protocol (SIP) "Join" header 49 IETF RFC 3840 [56]: the callee capabilities 50 IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field) 50A IETF RFC 7044 [25]: the "mp" header field parameter 50B IETF RFC 7044 [25]: the "rc" header field parameter 50C IETF RFC 7044 [25]: the "rp" header field parameter 50C IETF RFC 7044 [25]: the "np" header field parameter 51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)	45		42	52	m
46IETF RFC 3892 [53]: the SIP Referred-By mechanism4353m47IETF RFC 3891 [54]: the Session Initiation Protocol (SIP) "Replaces" header4454048IETF RFC 3911 [55]: the Session Initiation Protocol (SIP) "Join" header4555049IETF RFC 3840 [56]: the callee capabilities4656050IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field)4757050AIETF RFC 7044 [25]: the "mp" header field parameter 50C47B57B050CIETF RFC 7044 [25]: the "rc" header field parameter 50C47C57C051IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol4858052IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)49590					
IETF RFC 3891 [54]: the Session Initiation Protocol (SIP) 44	46		43	53	m
"Replaces" header 48 IETF RFC 3911 [55]: the Session Initiation Protocol (SIP) "Join" header 49 IETF RFC 3840 [56]: the callee capabilities 50 IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field) 50A IETF RFC 7044 [25]: the "mp" header field parameter 50B IETF RFC 7044 [25]: the "rc" header field parameter 50C IETF RFC 7044 [25]: the "np" header field parameter 51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)					0
IETF RFC 3911 [55]: the Session Initiation Protocol (SIP) "Join" header 49 IETF RFC 3840 [56]: the callee capabilities 46 56 0 50 IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field) 50A IETF RFC 7044 [25]: the "mp" header field parameter 50B IETF RFC 7044 [25]: the "rc" header field parameter 50C IETF RFC 7044 [25]: the "np" header field parameter 51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)					
"Join" header 49 IETF RFC 3840 [56]: the callee capabilities 50 IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field) 50A IETF RFC 7044 [25]: the "mp" header field parameter 50B IETF RFC 7044 [25]: the "rc" header field parameter 50C IETF RFC 7044 [25]: the "np" header field parameter 51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)	48		45	55	0
IETF RFC 3840 [56]: the callee capabilities 46 56 0 IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field) 50A IETF RFC 7044 [25]: the "mp" header field parameter 50B IETF RFC 7044 [25]: the "rc" header field parameter 50C IETF RFC 7044 [25]: the "np" header field parameter 51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)					
IETF RFC 7044 [25]: an extension to the session initiation protocol for request history information (History-Info header field) 50A IETF RFC 7044 [25]: the "mp" header field parameter 47A 57A 0 50B IETF RFC 7044 [25]: the "rc" header field parameter 47B 57B 0 50C IETF RFC 7044 [25]: the "np" header field parameter 47C 57C 0 51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)	49		46	56	0
protocol for request history information (History-Info header field) 50A IETF RFC 7044 [25]: the "mp" header field parameter 47A 57A 0 50B IETF RFC 7044 [25]: the "rc" header field parameter 47B 57B 0 50C IETF RFC 7044 [25]: the "np" header field parameter 47C 57C 0 51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)			47		0
field) 50A IETF RFC 7044 [25]: the "mp" header field parameter 47A 57A 0 50B IETF RFC 7044 [25]: the "rc" header field parameter 47B 57B 0 50C IETF RFC 7044 [25]: the "np" header field parameter 47C 57C 0 51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)					
50A IETF RFC 7044 [25]: the "mp" header field parameter 47A 57A 0 50B IETF RFC 7044 [25]: the "rc" header field parameter 47B 57B 0 50C IETF RFC 7044 [25]: the "np" header field parameter 47C 57C 0 51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)					
50BIETF RFC 7044 [25]: the "rc" header field parameter47B57B050CIETF RFC 7044 [25]: the "np" header field parameter47C57C051IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol4858052IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)49590	50A		47A	57A	0
50C IETF RFC 7044 [25]: the "np" header field parameter 47C 57C 0 51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)					0
51 IETF RFC 5079 [57]: Rejecting anonymous requests in the session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3)			47C		0
session initiation protocol 52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3) 59 o					
52 IETF RFC 4458 [58]: session initiation protocol URIs for applications such as voicemail and interactive voice response (NOTE 3) 59 0					
applications such as voicemail and interactive voice response (NOTE 3)	52		49	59	0
response (NOTE 3)					
		response (NOTE 3)		<u> </u>	
	53		50	61	m
INVITE transactions					

54	IETF RFC 4457 [60]: the P-User-Database private header field extension	51	60	n/a
55	IETF RFC 5031 [61]: A Uniform Resource Name (URN) for Emergency and Other Well-Known Services		62	n/a
56	IETF RFC 5627 [62]: obtaining and using GRUUs in the 53		63	c1
<i></i>	Session Initiation Protocol (SIP)			
57 58	Void IETF RFC 4168 [27]: the Stream Control Transmission	55	65	
56	Protocol (SCTP) as a Transport for the Session Initiation Protocol (SIP)	55	65	0
59	IETF RFC 5002 [64]: the SIP P-Profile-Key private header field extension	56	66, 66A, 66B	с3
60	IETF RFC 5626 [65]: managing client initiated connections in SIP	57	67	c1
61	IETF RFC 5768 [66]: indicating support for interactive connectivity establishment in SIP	58	68	n/a
62	IETF RFC 5365 [67]: multiple-recipient MESSAGE requests in the session initiation protocol	59	69	o if 29, else n/a
63	IETF RFC 6442 [68]: Location conveyance for the Session Initiation Protocol	60	70, 70A, 70B	m
64	IETF RFC 5368 [69]: referring to multiple resources in the session initiation protocol	61	71	o if 19, else n/a
65	IETF RFC 5366 [70]: conference establishment using request-contained lists in the session initiation protocol	62	72	0
66	IETF RFC 5367 [71]: subscriptions to request-contained resource lists in the session initiation protocol	63	73	o if 23, else
67	IETF RFC 4967 [72]: dialstring parameter for the session initiation protocol uniform resource identifier	64	74	c2
68	IETF RFC 4964 [73]: the P-Answer-State header extension to the session initiation protocol for the open mobile alliance push to talk over cellular	65	75	0
69	IETF RFC 5009 [74]: the SIP P-Early-Media private header field extension for authorization of early media	66	76	c4
70	IETF RFC 4694 [75]: number portability parameters for the 'tel' URI	67, 67A, 67B	77, 77A, 77B	0
72	IETF RFC 4411 [77]: extending the session initiation protocol Reason header for preemption events	69	79	0
73	IETF RFC 4412 [78]: communications resource priority for the session initiation protocol (Resource-Priority header field)	70, 70A, 70B	80, 80A, 80B	0
74	IETF RFC 5393 [79]: addressing an amplification vulnerability in session initiation protocol forking proxies	71	81	m
75	IETF RFC 5049 [80]: the remote application identification of applying signalling compression to SIP	72	82	n/a
76	IETF RFC 5688 [81]: a session initiation protocol media feature tag for MIME application sub-types	73	83	c1
77	IETF RFC 6050 [26]: Identification of communication services in the session initiation protocol	74	84, 84A	0
78	IETF RFC 5360 [82]: a framework for consent-based communications in SIP	75, 75A, 75B	85	0
79	IETF RFC 7433 [83]: a mechanism for transporting user-to- user call control information in SIP	76	86	c1
79A	IETF RFC 7434 [83A]: interworking ISDN call control user information with SIP	76A	-	c1
80	IETF RFC 7316 [84]: The SIP P-Private-Network-Indication private header (P-Header)	77	87	c1
81	IETF RFC 5502 [85]: the SIP P-Served-User private header	78	88	c2
83	IETF draft-mohali-dispatch-originating-cdiv-parameter [197]: the SIP P-Served-User header extension for Originating CDIV session case	79	89	n/a
84	IETF RFC 6228 [88]: the 199 (Early Dialog Terminated) response code	81	91	m
85	IETF RFC 5621 [89]: message body handling in SIP	82	92	m
86	IETF RFC 6223 [90]: indication of support for keep-alive	83	93	0
87	IETF RFC 5552 [91]: SIP Interface to VoiceXML Media Services	84	94	n/a
88	IETF RFC 3862 [92]: common presence and instant messaging (CPIM): message format	85	95	0

89	IETF RFC 5438 [93]: instant message disposition notification	86	96	0
90	IETF RFC 5373 [94]: requesting answering modes for SIP	87	97, 97A	0
	(Answer-Mode and Priv-Answer-Mode header fields)			
91	Void			
92	IETF RFC 3959 [96]: the early session disposition type for	89	99	0
	SIP			
93	Void			
94	IETF RFC 7989 [124]: End-to-End Session Identification in	91	101	0
	IP-Based Multimedia Communication Networks			
95	IETF RFC 6026 [125]: correct transaction handling for 200	92	102	m
	responses to Session Initiation Protocol INVITE requests			
96	IETF RFC 5658 [126]: addressing Record-Route issues in	93	103	0
	the Session Initiation Protocol (SIP)			
97	IETF RFC 5954 [127]: essential correction for IPv6 ABNF	94	104	m
	and URI comparison in IETF RFC 3261 [13]			
98	IETF RFC 4488 [135]: suppression of session initiation	95	105	m if 19, else
	protocol REFER method implicit subscription			n/a
99	IETF RFC 7462 [136]: Alert-Info URNs for the Session	96	106	0
	Initiation Protocol			
100	Clause 3.1 of TS 24.229 [5]: multiple registrations	97	107	c2
101	IETF RFC 5318 [141]: the SIP P-Refused-URI-List private-	98	108	c5
	header			
102	IETF RFC 4538 [140]: request authorization through dialog	99	109	0
	Identification in the session initiation protocol (Target-Dialog			
	header field)			
103			0	
	features and capabilities in the Session Initiation Protocol			
	(SIP)			
104	IETF RFC 6140 [160]: registration of bulk number contacts	101	111	c3
105	IETF RFC 6230 [161]: media control channel framework	102	112	0
105A	TS 24.229 [5]: S-CSCF restoration procedures	103	113	c3
106	IETF RFC 6357 [164]: SIP overload control	104	114	0
107	IETF RFC 7339 [165]: feedback control	104A	114A	0
108	IETF RFC 7200 [167]: distribution of load filters	104B	114B	0
109	TS 24.229 [5]: Handling of a 380 (Alternative service)	105	115	n/a
	response			
110	10 IETF RFC 7090 [184]: Public Safety Answering Point (PSAP) 107 117		0	
	Callback			
111	IETF RFC 8055: Via header field parameter to indicate	106	116	n/a
	received realm			
112	IETF RFC 7549 [188]: SIP URI parameter to indicate traffic	108	118	0
	leg			(NOTE 4)
113	TS 24.229 [5] clause 4.14: PCRF based P-CSCF restoration	109	119	c3
114	TS 24.229 [5] clause 4.14: HSS based P-CSCF restoration	110	120	c3
115	TS 24.229 [5]: the Relayed-Charge header extension	111	121	n/a
	to annual transfer of the NAME of the contract			

c1: m in case of roaming II-NNI, else o

c2: m in case of roaming II-NNI, else n/a

c3: o in case of roaming II-NNI, else n/a

c4: m in case of trust relationship between the interconnected networks, else n/a

c5: o in case of non-roaming II-NNI and loopback traversal scenario, else n/a
NOTE 1: The item numbering corresponds to the one provided in table A.4 in TS 24.229 [5].
NOTE 2: The item numbering corresponds to the one provided in table A.162 in TS 24.229 [5].

NOTE 3: A common URI namespace is required to apply this feature on the II-NNI.

NOTE 4: For the roaming II-NNI the support of this major capability is recommended.

Table 6.1.3.2: Key to notation codes for major capabilities

Notation code	Notation name	Explanation	
m	mandatory	The capability shall be supported at II-NNI. SIP message relating to this capability shall be sent over the II-NNI if received from the serving network, unless they also make use of other unsupported capabilities. SIP headers or other information elements relating to this capability shall be passed over the II-NNI if received from the sending side. This does not imply that network elements inside the serving network or served network or user equipment connected to these networks shall support this capability.	
0	optional	The capability may or may not be supported at II-NNI. The support of the capability is provided based on bilateral agreement between the operators.	
n/a	not applicable	It is impossible to use/support the capability at the II-NNI.	
c <integer></integer>	conditional	The support of the capability ("m", "o" or "n/a") depends on the support of other optional or conditional items. <integer> is the identifier of the conditional expression.</integer>	

6.1.4 SIP message bodies

The MIME type "application/sdp" and multipart message bodies (multipart/mixed, multipart/related and multipart/alternative) shall be supported according to IETF RFC 5621 [89] over the II-NNI. Other MIME types may be supported over the II-NNI based on agreement between operators.

The SDP message bodies contained in the INVITE request shall not be encrypted over the II-NNI.

- NOTE 1: Some MIME types in SIP requests and responses are listed in annex A of 3GPP TS 24.229 [5].
- NOTE 2: The multipart message bodies are used for carrying two or more message body types as described in IETF RFC 5621 [89].
- NOTE 3: The IBCF can provide the capabilities to examine the length of a SIP message body and take an appropriate action (e.g. reject the request, remove the body) as specified in clause 5.10.6.3 of 3GPP TS 24.229 [5].
- NOTE 4: In the INVITE request, the SDP message body is present over the II-NNI, except when the INVITE request without SDP message body is required to provide services (e.g. 3rd party call control).

Table 6.1.4.1: List of MIME bodies

Item	MIME body name	II-NNI requirements in ref (NOTE 1)	Defined in ref (NOTE 2)
1	application/3gpp-ims+xml	-	TS 24.229 [5], clause 7.6
3	message/cpim	-	IETF RFC 3862 [92]
4	message/imdn+xml	-	IETF RFC 5438 [93]
5	application/im-iscomposing+xml	clause 16.2	IETF RFC 3994 [175]
6	multipart/mixed	clause 15.1, clause 15.4, clause 15.6.2, clause 15.6.3, clause 15.6.4, clause 18.3.3	IETF RFC 2046 [169]
7	multipart/related	clause 15.1, clause 15.2, clause 15.6.5	IETF RFC 2387 [170]
8	multipart/alternative	-	IETF RFC 2046 [169]
9	application/pidf+xml	clause 15.1	IETF RFC 3863 [174]
10	application/pidf-diff+xml	clause 15.1	IETF RFC 5262 [179]
11	application/resource-lists+xml	clause 12.19, clause 15.1, clause 15.6.3, clause 16.5	IETF RFC 4826 [178]
12	application/rlmi+xml	clause 15.2, clause 15.6.5	IETF RFC 4662 [177]
13	application/sdp	-	IETF RFC 4566 [147]
14	application/simple-filter+xml	clause 15.1, clause 15.6.4	IETF RFC 4661 [176]
15	application/simple-message- summary+xml	clause 12.9	IETF RFC 3842 [172]
16	message/sipfrag	clause 12.13, clause 18.2, clause 18.3.1	IETF RFC 3420 [171]
17	application/vnd.3gpp.access- transfer-events+xml	clause 14.5.3	TS 24.237 [131], clause D.5.4
18	application/vnd.3gpp.cw+xml	clause 12.7	TS 24.615 [37], clause C.1.1
19	application/vnd.3gpp.iut+xml	clause 18.3.2, clause 18.3.3	TS 24.337 [149], clause C.2.3
20	application/vnd.3gpp.mid- call+xml	clause 14.4	TS 24.237 [131], clause D.1.3
21	application/vnd.3gpp.replication +xml	clause 18.4.1, clause 18.4.2	TS 24.337 [149], clause C.1.3
22	application/vnd.3gpp.sms	-	
23	application/vnd.3gpp.srvcc- ext+xml	clause 14.5.1	TS 24.237 [131], clause D.4.4
24	application/vnd.3gpp.srvcc-info+xml	clause 14.2.3	TS 24.237 [131], clause D.3.4
25	application/vnd.3gpp.state-and- event-info+xml	clause 14.2.2, clause 14.4	TS 24.237 [131], clause D.2.4
26	application/vnd.3gpp.ussd	clause 12.24	TS 24.390 [163], clause 5.1.3
27	application/vnd.etsi.aoc+xml	clause 12.22	TS 24.647 [122], clause E.1.1
28	application/vnd.etsi.cug+xml	clause 12.16	TS 24.654 [103], clause 4.4.1
29	application/vnd.etsi.mcid+xml	clause 12.2	TS 24.616 [33], clause 4.4
30	application/vnd.etsi.pstn+xml	-	TS 29.163 [168], clause F.2
31	application/vnd.oma.suppnot+x ml	clause 15.6.2, clause 15.6.3	OMA-SUP-XSD_prs_suppnotFilter- V1_0 [182]
32	application/watcherinfo+xml	clause 15.3	IETF RFC 3858 [173]
33	application/xcap-diff+xml	clause 15.4, clause 15.6.5	IETF RFC 5874 [180]
34	application/session-info	-	TS 29.163 [168], clause G.2
35	application/load-control+xml	clause 21	IETF RFC 7200 [167]
36	application/vnd.etsi.sci+xml	clause 11.3	TS 29.658 [186]
	1 -11	1	1

NOTE 1: When no specific II-NNI requirements are defined, the II-NNI requirements may be derived from the additional information about MIME types in SIP requests and responses in annex A of TS 24.229 [5].

NOTE 2: This column references the definition of the MIME body for informative purpose only, the usage is defined in other specifications not listed here.

Applicable characteristics of the SIP message body MIMEs (i.e. the value(s) of Content-Disposition header field and Content-Language header field) over the II-NNI may be a subject of operator agreements.

6.2 Control Plane Transport

6.2.1 General

The control plane transport of the II-NNI shall comply with clause 4.2A of 3GPP TS 24.229 [5].

Support of SCTP as specified in IETF RFC 4168 [27] is optional for an IBCF connected by II-NNI. Nevertheless this option is favourable if the operators would like to improve reliability over the Ici.

6.3 SIP timers

Table 6.3.1 shows values of SIP timers that should be supported at II-NNI. It contains the following items:

- the first column, titled "SIP Timer", shows the timer names as defined in IETF RFC 3261 [13] or IETF RFC 6026 [125];
- the second column reflects the timer meaning as defined in IETF RFC 3261 [13];
- the third column reflects the reference to the proper clause in the IETF RFC 3261 [13] and in 3GPP TS 24.229 [5] and
- the final column lists the values recommended for the functional entities closest to the border of an II-NNI (see reference model in clause 5).

Table 6.3.1 reports information from 3GPP TS 24.229 [5], table 7.7.1. Values between IM CN subsystem elements shown in the second column in 3GPP TS 24.229 [5], table 7.7.1 are applicable for the II-NNI and are reported in the fourth column of table 6.3.1. If there are any differences between table 6.3.1 and 3GPP TS 24.229 [5], table 7.7.1, the information within 3GPP TS 24.229 [5], table 7.7.1 is applicable.

Table 6.3.1: SIP timers at II-NNI

SIP Timer	Meaning	Reference	Recommended values
T1	RTT estimate	[13] clause 17.1.1.1 [5] table 7.7.1	500ms default (see NOTE)
T2	The maximum retransmit interval for non-INVITE requests and INVITE responses	[13] clause 17.1.2.2 [5] table 7.7.1	4s (see NOTE)
T4	Maximum duration a message will remain in the network	[13] clause 17.1.2.2 [5] table 7.7.1	5s (see NOTE)
Timer A	INVITE request retransmit interval, for UDP only	[13] clause 17.1.1.2 [5] table 7.7.1	initially T1
Timer B	INVITE transaction timeout timer	[13] clause 17.1.1.2 [5] table 7.7.1	64*T1
	proxy INVITE transaction timeout	[13] clause 16.6 [5] table 7.7.1	> 3min
Timer D	Wait time for response retransmits	[13] clause 17.1.1.2 [5] table 7.7.1	> 32s for UDP
		[13] clause 17.1.1.2 [5] table 7.7.1	0s for TCP/SCTP
Timer E	non-INVITE request retransmit interval, UDP only	[13] clause 17.1.2.2 [5] table 7.7.1	initially T1
Timer F	non-INVITE transaction timeout timer	[13] clause 17.1.2.2 [5] table 7.7.1	64*T1
Timer G	INVITE response retransmit interval	[13] clause 17.2.1 [5] table 7.7.1	initially T1
Timer H	Wait time for ACK receipt.	[13] clause 17.2.1 [5] table 7.7.1	64*T1
Timer I	Wait time for ACK retransmits	[13] clause 17.2.1 [5] table 7.7.1	T4 for UDP
		[13] clause 17.2.1 [5] table 7.7.1	0s for TCP/SCTP
Timer J	Wait time for non-INVITE request retransmits	[13] clause 17.2.2 [5] table 7.7.1	64*T1 for UDP
		[13] clause 17.2.2 [5] table 7.7.1	0s for TCP/SCTP
Timer K	Wait time for response retransmits	[13] clause 17.1.2.2 [5] table 7.7.1	T4 for UDP
		[13] clause 17.1.2.2 [5] table 7.7.1	0s for TCP/SCTP
	Wait time for accepted INVITE request retransmits	[125] clause 8.11 [5] table 7.7.1	64*T1
Timer M	Wait time for retransmission	[125] clause 8.11 [5] table 7.7.1	64*T1
NOTE:	As a network option, SIP T1 Ti SIP T2 and SIP T4 Timer value the MRFC and the controlling <i>I</i>	mer's value can be extended, along wes, to take into account the specificitients are under the control of the same ration, that the MRFC implements a lo	es of the supported services when operator and the controlling AS

7 User plane Interconnection

7.1 Media and Codec

For "end-to-end" media session involving the II-NNI, the SIP/SDP codec negotiation procedure can be applied between IM CN subsystems using different media codecs. It is possible that the end-to-end codec negotiation could fail because no common codec could be supported by the UEs, in particular for voice services.

To enhance interoperability, the IBCF, the MRFC, or other IMS network entities can interfere with the end-to-end codec negotiation to offer additional codec(s) available via transcoding, or to remove codecs. The IBCF can configure an attached TrGW to transcode, and the MRFC can configure an attached MRFP to transcode.

Codecs applicable at the II-NNI may be a subject of interworking agreements.

- NOTE 1: Possible codecs which could be used at the II-NNI are described in 3GPP TS 26.114 [11] and ETSI 3GPP TS 181 005 [12].
- NOTE 2: As described in 3GPP TS 24.229 [5], the IETF RFC 4733 [157] is used to encode DTMF events and a payload type number associated with the MIME subtype "telephone-event" is included in a SDP message.

However, to avoid that transcoding is performed several times, applicable codecs at the II-NNI should be restricted as little as possible in the inter-operator agreements. It is not recommended to set only codecs which are not agreed to use by the inter-operator agreement into the SDP of the SIP message at the II-NNI. Whether it is allowed to offer codecs which are not included in the applicable codec list made by inter-operator agreements over the II-NNI is also determined by the inter-operator agreement if necessary.

NOTE 3: Transcoding can be performed in an IMS network serving an SDP offerer or in an IMS network serving an SDP answerer. To avoid that transcoding is performed multiple times, inter-operator agreements can clarify if it is preferred that IMS network serving an SDP offerer or IMS network serving an SDP answerer modify an SDP offer to offer transcoding.

If the IBCF performs media transcoding control, the IBCF shall apply the related procedures in 3GPP TS 24.229 [5].

7.2 User Plane Transport

The user plane transport of the II-NNI may use the protocols listed in table 7.2.1. Protocols that use UDP, RTP, SCTP or TCP as the underlying transport protocol may be used based on agreements between operators. The used protocols to transport media are negotiated by means of the SDP offer/answer procedure specified in IETF RFC 3264 [146].

Table 7.2.1: Supported transport-level RFCs to be described in SIP/SDP messages

Item	RFC	Title	Support
1	IETF RFC 3550 [151]	RTP: A Transport Protocol for Real-Time Applications	Mandatory
2	IETF RFC 768 [152]	User Datagram Protocol	Mandatory
3	IETF RFC 3551 [153]	RTP Profile for Audio and Video Conferences with Minimal Control	Mandatory
4	IETF RFC 3556 [154]	Session Description Protocol (SDP) Bandwidth Modifiers for RTP Control Protocol (RTCP) Bandwidth	Mandatory
5	IETF RFC 4585 [155]	Extended RTP Profile for Real-time Transport Control Protocol (RTCP) - Based Feedback (RTP/AVPF)	Optional (NOTE 1)
6	IETF RFC 793 [156]	Transmission Control Protocol	Optional (NOTE 2)
7	IETF draft-ietf- mmusic-sctp- sdp [190]	Stream Control Transmission Protocol (SCTP)-Based Media Transport in the Session Description Protocol (SDP)	Optional (NOTE 3)

NOTE 1: Used by MTSI, as indicated in TS 26.114 [11].

NOTE 2: Used for MSRP service.

NOTE 3: Used for data channel in telepresence using IMS, as indicated in TS 24.103 [189].

8 Numbering, Naming and Addressing

8.1 Numbering, Naming and Addressing for SIP message

The following URI formats in SIP messages may be applied at the Ici as standardized in 3GPP TS 24.229 [5]:

- SIP URI defined in IETF RFC 3261 [13];
- tel URI defined in IETF RFC 3966 [14];
- IM URI defined in IETF RFC 3860 [15]; and
- PRES URI defined in IETF RFC 3859 [16].

According to 3GPP TS 24.229 [5], the IBCF acting as an exit or entry point in the IMS network supports these URI formats. These URI formats shall be supported at the roaming II-NNI. The SIP URI format shall be supported at the non-roaming II-NNI. For the loopback traversal scenario both the SIP URI and the tel URI shall be supported. The tel URI, IM URI and PRES URI formats may be supported at the non-roaming II-NNI based on agreement between operators. For the loopback traversal scenario the IM URI and PRES URI may be supported based on agreement between operators. Other URI formats may be supported over the II-NNI depending on the operator agreements.

A global number as defined in IETF RFC 3966 [14] shall be used in a tel URI or in the user portion of a SIP URI with the user=phone parameter when conveyed via a non-roaming II-NNI or for the loopback traversal scenario in the Request-URI and in the P-Asserted-Identity header field, except when agreement exists between the operators to also allow other kinds of numbers.

- NOTE 1: In a SIP URI the user portion of the Request-URI represents a telephone number only if the SIP URI includes the user=phone parameter.
- NOTE 2: Agreements can exist between operators to allow non-global number (e.g. national service numbers. business trunking numbers, or private numbers) at a non-roaming II-NNI or for the loopback traversal scenario. A SIP URI with such a number, a user=phone parameter, and a phone-context parameter agreed between the operators can then be used.
- NOTE 3: 3GPP TS 24.229 [5] allows to restrict the number within a SIP Request-URI with user=phone parameter at a non-roaming II-NNI or for the loopback traversal scenario to be a global number (i.e. E.164 in international format) via an appropriate Application Server. Suitable configuration by the operator is needed to achieve the desired modification of the format.
- NOTE 4: The allowed phone number formats in the P-Asserted-Identity header field of a served user are configured by the operator. According to 3GPP TS 23.003 [35], international E.164 format is used within a P-Asserted-Identity header field.
- NOTE 5: The global number format usage within a SIP Request-URI with the user=phone parameter at a non-roaming II-NNI or for the loopback traversal scenario allows the terminating network to find the called subscriber, via HSS interrogation, without any further number translation and thus improves the success of the interconnection between IMS operators.

The optional "oli" and "cpc" tel URI parameters associated with a tel URI or a SIP URI with user=phone are described in 3GPP TS 24.229 [5] clause 7.2A.12 and can be part of the P-Asserted-Identity header field. Depending on operator agreements, those URI parameters may be supported at the non-roaming II-NNI or for the loopback traversal scenario.

The "sos" SIP URI parameter associated with a URI in the Contact header field of a REGISTER request or a 200 (OK) response to REGISTER request is described in 3GPP TS 24.229 [5]. The "sos" SIP URI parameter shall be supported at the roaming II-NNI.

The "sos" SIP URI parameter associated with the Request-URI for all dialogs and standalone SIP requests described in clause 5.2.10.3 of 3GPP TS 24.229 [5] and shall be supported at the roaming II-NNI.

The "rn" and "npdi" number portability parameters for the tel URI and the SIP URI with user=phone as described within IETF RFC 4694 [75] can be part of the Request-URI. Depending on operator agreements these parameters may be exchanged over the non-roaming II-NNI or for the loopback traversal scenario.

NOTE 6: The "rn" and "npdi" parameters can be used to address the entry point of the terminating operator depending on national rules for number portability.

The "isub" tel URI parameter for the tel URI and the SIP URI with user=phone as described within IETF RFC 3966 [14] can be part of the Request-URI, To header field and P-Asserted-Identity header field. Depending on operator agreements, this URI parameter may be exchanged over the II-NNI.

The "premium-rate" tel URI parameter for the tel URI and the SIP URI with user=phone as described within 3GPP TS 24.229 [5] clause 7.2A.17 can be part of the Request-URI. Depending on operator agreements, this URI parameter may be exchanged at the roaming II-NNI.

8.2 Numbering, Naming and Addressing for SDP

The following URI format in the SDP exchange may be applied at the Ici as standardized in 3GPP TS 24.229 [5]:

- MSRP URI for a session of instant messages defined in IETF RFC 4975 [17].

This URI format shall be supported at the roaming II-NNI and may be supported at the non-roaming II-NNI and for the loopback traversal scenario based on agreement between operators. Other URI formats may be supported over the II-NNI depending on the operators' agreements.

9 IP Version

The network elements interconnected by means of the II-NNI may support IPv4 only, IPv6 only or both.

The support of one or both of the IP versions is an operator option and should be based on bilateral agreement.

In case IPv4 and IPv6 networks are interconnected, the involved IBCFs and TrGWs shall apply the IP version interworking procedures as indicated in 3GPP TS 29.162 [8].

10 Security

The supported security mechanisms for IP signalling transport over II-NNI interfaces are described in 3GPP TS 33.210 [10].

11 Charging

11.1 General

The accounting information to be supported over the Ici is described in 3GPP TS 32.260 [29] and 3GPP TS 32.240 [183]. It shall be configurable by the operator to use or not the accounting mechanisms provided by the IBCF.

11.2 Inter-operator accounting

For inter-operator accounting, the procedures related to the P-Charging-Vector header field specified in 3GPP TS 24.229 [5] shall be supported over the II-NNI as further specified below.

NOTE 1: The "icid-value" header field parameter identifying a dialog or a transaction outside a dialog is included in the P-Charging-Vector header field as specified in 3GPP TS 24.229 [5]. The "icid-value" header field parameter value of a SIP response to a SIP request is identical to the "icid-value" of the SIP request.

For the roaming II-NNI:

- the P-Charging-Vector header field in the REGISTER requests, initial SIP requests and stand-alone SIP requests, containing the type 1 "orig-ioi" with the entry which identifies the visited network; and
- the P-Charging-Vector header field in the REGISTER responses, SIP responses to initial SIP requests and SIP stand-alone requests, containing type 1 "orig-ioi" and type 1 "term-ioi" header field parameters with the entries which identify the visited network and the home network respectively;

shall be supported.

NOTE 2: Operator network identifiers populated in the type 1 "orig-ioi" and type 1 "term-ioi" header field parameters need to be exchanged by inter-operator agreements in advance.

For the II-NNI between IMS home networks:

- the P-Charging-Vector header field in the SIP requests containing the type 2 "orig-ioi" with the entry which identifies the home originating network; and
- the P-Charging-Vector header field in the SIP responses containing the type 2 "orig-ioi" and type 2 "term-ioi" header field parameters with the entries which identify the home originating network and the home terminating network respectively;

may be supported based on inter-operator agreements.

If the roaming architecture for voice over IMS with local breakout is used, for the II-NNI between the caller's visited network and the callee's home network except for the roaming II-NNI:

- the P-Charging-Vector header field in the SIP requests containing the type 2 "orig-ioi" with the entry which identifies the visited originating network; and
- the P-Charging-Vector header field in the SIP responses containing the type 2 "orig-ioi" and type 2 "term-ioi" header field parameters with the entries which identify the visited originating network and the home terminating network respectively;

may be supported based on inter-operator agreements.

NOTE 3: Operator network identifiers populated in the type 2 "orig-ioi" and type 2 "term-ioi" header field parameters need to be exchanged by inter-operator agreements in advance.

For the II-NNI for the transit scenario:

- the P-Charging-Vector header field in the SIP requests and responses containing the "transit-ioi" header field parameter with the entry(ies) which identify the transit network(s);

may be supported based on inter-operator agreements.

NOTE 4: Operator network identifiers populated in the value(s) of "transit-ioi" header field parameter need to be exchanged by inter-operator agreements in advance.

11.3 Transfer of IP multimedia service tariff information

In order to assure the end-to-end service interoperability through the Inter-IMS Network to Network Interface (II-NNI), transfer of IP multimedia service tariff information as specified in 3GPP TS 29.658 [186] may be supported on the II-NNI between two IMS networks. The support of transfer of IP multimedia service tariff information is based on agreement between operators.

If transfer of IP multimedia service tariff information is supported, the "application/vnd.etsi.sci+xml" MIME body with the Content-Disposition header field set to either "render" with the "handling" parameter set to "optional" or to "signal" with the "handling" parameter set to "required" or "optional" based on operator agreement in 18x responses to the INVITE request and in the INFO request shall be supported at the II-NNI.

Supplementary services associated with the IMS multimedia telephony communication service

12.1 General

In order to assure the end-to-end service interoperability through the Inter-IMS Network to Network Interface (II-NNI), the associated supplementary services of the multimedia telephony communication service may be supported on the II-NNI between the two IMS networks.

The MMTEL communication service is identified by means of the "urn:urn-7:3gpp-service.ims.icsi.mmtel" URN. The "urn:urn-7:3gpp-service.ims.icsi.mmtel" can appear in:

- the media feature tag "g.3gpp.icsi-ref" (specified in 3GPP TS 24.229 [5] clause 7.2A.8) in the Contact header field and the Accept-Contact header field;
- the feature-capability indicator "g.3gpp.icsi-ref" (specified in 3GPP TS 24.229 [5] clause 7.9A.2) in the Feature-Caps header field; and
- the P-Asserted-Service header field.

The support of each associated supplementary service is based on agreement between operators.

If a supplementary service is supported, the related procedures from the 3GPP TS 22.173 [30], the protocol details from the 3GPP TS 24.173 [31] and specifications referenced in the 3GPP TS 24.173 [31] shall be applied with the requirements in the relevant clause below due to the crossing of the II-NNI.

A classification of the importance of supplementary services applicable over the II-NNI is available in the informative annex Db of 3GPP TS 22.173 [30].

NOTE: Agreeing on interworking of entire class of services according to this classification can simplify the cooperation between interconnecting networks but remains optional.

12.2 Malicious Communication IDentification (MCID)

Service specific requirements in accordance with 3GPP TS 24.616 [33] shall be supported over the II-NNI.

The P-Asserted-Identity header field shall be supported at the II-NNI.

The INFO request and the 200 (OK) response to the INFO request containing the "application/vnd.etsi.mcid+xml" MIME body defined in 3GPP TS 24.616 [33] may be supported at the II-NNI.

If a network terminating the dialog supports MCID, the terminating network shall only deliver the MCID request in the "application/vnd.etsi.mcid+xml" MIME body, as specified in the 3GPP TS 24.616 [33], if an agreement to use the MCID supplementary service according to the 3GPP TS 24.616 [33] exists with the network originating the dialog and if the INVITE request received by the terminating network does not contain the information of the originating party.

NOTE: The IBCF and the AS in the terminating network interact to deliver the MCID request only if an agreement to use the MCID supplementary service exists, as specified in 3GPP TS 24.616 [33] and 3GPP TS 24.229 [5].

The originating network and the terminating network shall have a bilateral agreement to support transportation of the minimum information specified in clause 4.5.2.5.0 of the 3GPP TS 24.616 [33] between the networks.

12.3 Originating Identification Presentation (OIP) and Originating Identification Restriction (OIR)

Service specific requirements in accordance with 3GPP TS 24.607 [32] shall be supported over the II-NNI.

The P-Asserted-Identity header field and the Privacy header field with values "id", "user", "none", "header" and "critical" shall be supported at the II-NNI.

NOTE 1: P-Asserted-Identity header fields are intended for end-to-end operation. Removal of such header fields will impact the intended end-to-end operation between the end users. Where a trust relationship exists on the P-Asserted-Identity header field between the two IMS networks, this header field cannot be altered when passing through the II-NNI according to 3GPP TS 24.229 [5]. Where no trust relationship exists on the P-Asserted-Identity header field between the two IMS networks, the IBCF determines whether to remove the P-Asserted-Identity header field according to procedures described in 3GPP TS 24.229 [5] clause 4.4.2 referencing IETF RFC 3325 [44] and local policy rules for using additional screening capabilities as defined in 3GPP TS 24.229 [5] clause 5.10.6.

NOTE 2: Where a trust relationship exists with the remote domain the From header field will be passed transparently by the IBCF. If a request is received by the terminating network and the application of the OIR service is required with the value "user" for the Privacy header field then the From header field will be anonymised in accordance with IETF RFC 3323 [34] by the terminating network. Where no trust relationship exists with the remote domain, the From header field can be, based on local policy rules, anonymised by the IBCF of the originating network prior passing through the II-NNI using screening capabilities defined in 3GPP TS 24.229 [5] clause 5.10.6 and clause 5.10.8.

SIP based user configuration as described in 3GPP TS 24.238 [100] shall be supported at the roaming II-NNI.

12.4 Terminating Identification Presentation (TIP) and Terminating Identification Restriction (TIR)

Service specific requirements in accordance with 3GPP TS 24.608 [113] shall be supported over the II-NNI.

The P-Asserted-Identity header field and the Privacy header field with values "id", "user", "none", "header" and "critical" shall be supported at the II-NNI.

NOTE: P-Asserted-Identity header fields are intended for end-to-end operation. Removal of such header fields will impact the intended end-to-end operation between the end users. Where a trust relationship exists on the P-Asserted-Identity header field between the two IMS networks, this header field will be passed transparently through the II-NNI according to 3GPP TS 24.229 [5]. Where no trust relationship exists on the P-Asserted-Identity header field between the two IMS networks, the IBCF determines whether to remove the P-Asserted-Identity header field according to procedures described in 3GPP TS 24.229 [5] clause 4.4.2, referencing IETF RFC 3325 [44] and local policy rules for using additional screening capabilities as defined in 3GPP TS 24.229 [5] clause 5.10.6.

The option tag "from-change" defined in IETF RFC 4916 [158], in the Supported header field should be supported at II-NNI.

12.5 Anonymous Communication Rejection (ACR)

Service specific requirements in accordance with 3GPP TS 24.611 [114] shall be supported over the II-NNI.

The P-Asserted-Identity header field and the Privacy header field shall be supported at the II-NNI.

Procedures as described in clause 12.21.4 are used to provide announcements.

The response code 433 (Anonymity Disallowed) shall be supported at the II-NNI.

SIP based user configuration as described in 3GPP TS 24.238 [100] shall be supported at the roaming II-NNI.

12.6 Communication DIVersion (CDIV)

Service specific requirements in accordance with 3GPP TS 24.604 [117] shall be supported over the II-NNI.

NOTE 1: The support of the Diversion header field not adopted in 3GPP TS 24.604 [117] requires bilateral agreement between the operators.

Procedures as described in clause 12.21.2 are used to provide announcements.

The Privacy header field with a priv-value set to "history" included in the hi-targeted-to-uri or as a standalone header field shall be supported at the II-NNI.

The History-Info header field as described by 3GPP TS 24.604 [117] containing an "mp" header field parameter as defined by IETF RFC 7044 [25] and a "cause" SIP URI parameter with cause values as defined by the IETF RFC 4458 [58] shall be supported over the II-NNI.

NOTE 2: The networks can have an internal limit in the number of allowed diversions, as described in 3GPP TS 24.604 [117], clause 4.5.2.6.1. To ensure efficiency of this control operators can indicate in their bilateral agreements their own number of allowed communication diversions, the parameter that is used for counting, and the network behavior when the internal limit is reached.

The response code 181 (Call Is Being Forwarded) shall be supported at the II-NNI.

The MESSAGE request procedure for indication of communication diversion to the diverting user as specified in 3GPP TS 24.604 [117] and 3GPP TS 24.229 [5] should be supported at the roaming II-NNI.

NOTE 3: The content of the MESSAGE request is operator specific.

SIP based user configuration as described in 3GPP TS 24.238 [100] shall be supported at the roaming II-NNI.

12.7 Communication Waiting (CW)

Service specific requirements in accordance with 3GPP TS 24.615 [37] shall be supported over the II-NNI.

The "application/vnd.3gpp.cw+xml" MIME body defined in 3GPP TS 24.615 [37] in the INVITE request shall be supported at the roaming II-NNI.

The Alert-Info header field set to "urn:alert:service:call-waiting" in a 180 (Ringing) response shall be supported at the II-NNI.

As a network option, in case of expiry of the CW timer, the response code 480 (Temporarily Unavailable) including a Reason header field containing the protocol value "Q.850" and the "cause" header field parameter set to "19" shall be supported at the non-roaming II-NNI and for the loopback traversal scenario.

Procedures as described in clause 12.21.2 are used to provide announcements.

12.8 Communication HOLD (HOLD)

Service specific requirements in accordance with 3GPP TS 24.610 [36] shall be supported over the II-NNI.

NOTE: The support of an alternative method not adopted in 3GPP TS 24.610 [36] requires bilateral agreement between the operators and is outside the scope of the present document.

Procedures as described in clause 12.21.3 are used to provide announcements.

12.9 Message Waiting Indication (MWI)

Service specific requirements in accordance with 3GPP TS 24.606 [112] shall be supported over the II-NNI.

The event package name "message-summary" in the Event header field according to IETF RFC 6665 [20] and 3GPP TS 24.229 [5] in the SUBSCRIBE request shall be supported at the roaming II-NNI.

The "application/simple-message-summary" MIME body described in 3GPP TS 24.606 [112] in the NOTIFY request shall be supported at the roaming II-NNI.

12.10 Communication Barring (CB)

12.10.1 Incoming Communication Barring (ICB)

Service specific requirements in accordance with 3GPP TS 24.611 [114] shall be supported over the II-NNI.

Procedures as described in clause 12.21.4 are used to provide announcements.

The response code 603 (Decline) including a Reason header field containing the protocol value set to "SIP" and the "cause" header field parameter set to value "603" as described in 3GPP TS 24.611 [114] shall be supported at the II-NNI.

A Reason header field containing the protocol value set to "SIP" and the "cause" header field parameter set to value "603" as described in 3GPP TS 24.611 [114] included in the BYE request shall be supported at the II-NNI.

SIP based user configuration as described in 3GPP TS 24.238 [100] shall be supported at the roaming II-NNI.

If the option IIFC (Inhibition of Incoming Forwarded Calls) is supported the transparency of information related to communication diversion (see clause 12.6) shall be supported at II-NNI.

12.10.2 Outgoing Communication Barring (OCB)

Service specific requirements in accordance with 3GPP TS 24.611 [114] shall be supported over the II-NNI.

Procedures as described in clause 12.21.4 are used to provide announcements.

The response code 603 (Decline) including a Reason header field containing the protocol value set to "SIP" and the "cause" header field parameter set to "603" as described in 3GPP TS 24.611 [114] shall be supported at the roaming II-NNI.

SIP based user configuration as described in 3GPP TS 24.238 [100] shall be supported at the roaming II-NNI.

12.11 Completion of Communications to Busy Subscriber (CCBS)

Service specific requirements in accordance with 3GPP TS 24.642 [109] shall be supported over the II-NNI.

The response code 486 (Busy Here) containing a Call-Info header field with a "purpose" header field parameter set to "call-completion" and the m parameter set to "BS" shall be supported at the non-roaming II-NNI and for the loopback traversal scenario.

For invoking and revoking of the CCBS supplementary service, announcement procedures shall be used to provide announcements and inband-interaction procedures as described in clause 12.21.3 and clause 12.21.4 shall be supported at the roaming II-NNI.

The response code 199 (Early Dialog Terminated) shall be supported at the roaming II-NNI.

Basic call procedures and in case of a call-completion recall initiated by a REFER request, normal REFER method handling procedures according to 3GPP TS 24.229 [5] shall be supported at the roaming II-NNI.

As a network option the special REFER request handling procedures according to 3GPP TS 24.628 [38] should be supported at the roaming II-NNI.

NOTE 1: 3rd party call control procedures can be used when the REFER request is not supported at the II-NNI.

NOTE 2: A REFER request can be rejected by IBCF based on operator policy as specified by 3GPP TS 24.229 [5].

The SUBSCRIBE and NOTIFY methods according to IETF RFC 6665 [20] and 3GPP TS 24.229 [5] containing the event package name "call-completion" in the Event header field and the Call-Info header field with a purpose parameter set to 'call-completion' and the m parameter set to "BS" shall be supported at the non-roaming II-NNI and for the loopback traversal scenario.

The Request-URI with the "m" SIP URI parameter with a value set to "BS" and the Call-Info header field with a purpose parameter set to 'call-completion' and the "m" parameter set to "BS" in the INVITE method shall be supported at the non-roaming II-NNI and for the loopback traversal scenario.

The Date header field in the 486 (Busy Here) response to the INVITE request shall be supported at the roaming II-NNI.

SIP based user configuration as described in 3GPP TS 24.238 [100] shall be supported at the roaming II-NNI.

12.12 Completion of Communications by No Reply (CCNR)

Service specific requirements in accordance with 3GPP TS 24.642 [109] shall be supported over the II-NNI.

The response code 180 (Ringing) containing a Call-Info header field with a purpose parameter set to 'call-completion' and the m parameter set to "NR" shall be supported at the non-roaming II-NNI and for the loopback traversal scenario.

For invoking and revoking of the CCNR supplementary service, announcement procedures shall be used to provide announcements and inband-interaction procedures as described in clause 12.21.3 and clause 12.21.4 shall be supported at the roaming II-NNI.

The response code 199 (Early Dialog Terminated) shall be supported at the roaming II-NNI.

Basic call procedures and in case of a call-completion recall initiated by a REFER request, normal REFER method handling procedures according to 3GPP TS 24.229 [5] shall be supported at the roaming II-NNI.

As a network option the special REFER request handling procedures according to 3GPP TS 24.628 [38] should be supported at the roaming II-NNI.

NOTE 1: 3rd party call control procedures can be used when the REFER request is not supported at the II-NNI.

NOTE 2: A REFER request can be rejected by IBCF based on operator policy as specified by 3GPP TS 24.229 [5].

The SUBSCRIBE and NOTIFY methods according to IETF RFC 6665 [20] and 3GPP TS 24.229 [5] containing the event package name "call-completion" in the Event header field and the Call-Info header field with a purpose parameter set to 'call-completion' and the m parameter set to "NR" shall be supported at the non-roaming II-NNI and for the loopback traversal scenario.

The Request-URI with the "m" SIP URI parameter with a value set to "NR" and the Call-Info header field with a purpose parameter set to 'call-completion' and the "m" parameter set to "NR" in the INVITE method shall be supported at the non-roaming II-NNI and for the loopback traversal scenario.

The Date header field in the 480 (Temporarily Unavailable) response to the INVITE request shall be supported at the roaming II-NNI.

SIP based user configuration as described in 3GPP TS 24.238 [100] shall be supported at the roaming II-NNI.

12.13 Explicit Communication Transfer (ECT)

12.13.1 Consultative and blind transfer

Service specific requirements in accordance with 3GPP TS 24.629 [116] shall be supported over the II-NNI.

The REFER method, the Referred-By header field and the Replaces header field as specified in 3GPP TS 24.629 [116] and the NOTIFY method containing an "application/sipfrag" MIME body shall be supported at the II-NNI for call transfer without third party call control.

The REFER method, the Referred-By header field and the Replaces header field as specified in 3GPP TS 24.629 [116] and the NOTIFY method containing an "application/sipfrag" MIME body shall be supported at the roaming II-NNI for call transfer with third party call control.

The Refer-To URI header parameter in the REFER request containing the Require header field set to "replaces" shall be supported at the roaming II-NNI.

The Replaces header field in the INVITE request shall be supported at the non-roaming II-NNI and for the loopback traversal scenario.

12.13.2 Assured transfer

The requirements for the assured transfer are the same as in clause 12.13.1 with the additional requirements in this subclause.

An Expires header field parameter in the Refer-To URI of the REFER Request shall be supported at the II-NNI for call transfer without third party call control.

An Expires header field parameter in the Refer-To URI of the REFER Request shall be supported at the roaming II-NNI for call transfer with third party call control.

The Refer-To header field in the REFER request containing the method parameter set to "CANCEL" shall be supported at the II-NNI for call transfer without third party call control.

The Refer-To header field in the REFER request containing the method parameter set to "CANCEL" shall be supported at the roaming II-NNI with third party call control.

12.14 Customized Alerting Tone (CAT)

Service specific requirements in accordance with 3GPP TS 24.182 [129] shall be supported over the II-NNI.

The P-Early-Media header field in as described in 3GPP TS 24.182 [129] shall be supported at the II-NNI.

The response code 183 (Session Progress) including a P-Early-Media header field shall be supported over the II-NNI.

The response code 199 (Early Dialog Terminated) shall be supported over the II-NNI.

The Supported header field and the Require header field with "early-session" option-tag shall be supported at the II-NNI, if the early session model is supported.

An "application/sdp" MIME body with the Content-Disposition set to "early-session" as specified in IETF RFC 3959 [96] shall be supported at II-NNI, if the early session model is supported.

The SIP INFO mechanism for DTMF transport, as defined in 3GPP TS 24.229 [5] may be supported at the II-NNI.

NOTE 1: For telephone-event based DTMF transport, the DTMF digits are sent as media and not visible in the control plane.

NOTE 2: Multiple methods for DTMF transport are defined in 3GPP TS 24.182 [129].

SIP based user configuration as described in 3GPP TS 24.238 [100] shall be supported at the roaming II-NNI.

12.15 Customized Ringing Signal (CRS)

Service specific requirements in accordance with 3GPP TS 24.183 [98] shall be supported over the II-NNI.

An Alert-Info header field in the initial INVITE request containing an URI followed by a URN "urn:alert:service:crs" shall be supported at the II-NNI.

A SDP "a=content" attribute with a "g.3gpp.crs" value in the PRACK request or the re-INVITE request may be supported at the II-NNI.

The Supported header field and the Require header field with "early-session" option-tag may be supported at the II-NNI

An "application/sdp" MIME body with the Content-Disposition header field set to "early-session" as specified in IETF RFC 3959 [96] may be supported at II-NNI.

The SIP INFO mechanism for DTMF transport, as defined in 3GPP TS 24.229 [5] may be supported at the II-NNI.

NOTE: For telephone-event based DTMF transport, the DTMF digits are sent as media and not visible in the control plane.

SIP based user configuration as described in 3GPP TS 24.238 [100] shall be supported at the roaming II-NNI.

12.16 Closed User Group (CUG)

Service specific requirements in accordance with 3GPP TS 24.654 [103] shall be supported over the II-NNI.

The "application/vnd.etsi.cug+xml" MIME body as specified 3GPP TS 24.654 [103] shall be supported in INVITE requests at the II-NNI.

NOTE: If no agreement between the originating network and the terminating network exists to support the CUG supplementary service the INVITE request is rejected as described in IETF RFC 5621 [89] when the "handling" parameter in the Content-Disposition of the "application/vnd.etsi.cug+xml" MIME body is set to "required".

The 403 (Forbidden) response, the 603 (Decline) response and the 500 (Server Internal Error) response shall be supported at II-NNI.

SIP based user configuration as described in 3GPP TS 24.238 [100] shall be supported at the roaming II-NNI.

12.17 Personal Network Management (PNM)

Service specific requirements in accordance with 3GPP TS 24.259 [99] shall be supported over the II-NNI.

A "g.3gpp.iari_ref" feature tag with the value "urn:urn-7:3gpp-application.ims.iari.pnm-controller" in the Contact header field of the REGISTER request shall be supported at the roaming II-NNI.

A "g.3gpp.iari_ref" feature tag with the value "urn:urn-7:3gpp-application.ims.iari.pnm-controller" in the Accept-Contact header field shall be supported at the II-NNI.

The History-Info header field shall be supported at II-NNI.

A "histinfo" option tag as described by 3GPP TS 24.259 [99] in the Supported header field shall be supported at II-NNI.

12.18 Three-Party (3PTY)

Service specific requirements in accordance with 3GPP TS 24.605 [105] shall be supported over the II-NNI.

NOTE 1: The requirements below can be relaxed by bilateral agreements between operators.

The requirements for the 3PTY supplementary service are the same as for the CONF supplementary service specified in clause 12.19 with the following additional requirement:

- If a REFER request is supported at the II-NNI, a Replaces header field in the header portion of the SIP URI of the Refer-to header field of the REFER request shall also be supported at II-NNI.

NOTE 2: Clause 12.19 describes the conditions for the support of the REFER request.

12.19 Conference (CONF)

Service specific requirements in accordance with 3GPP TS 24.605 [105] shall be supported over the II-NNI.

NOTE 1: The requirements below can be relaxed by bilateral agreements between operators.

The REFER request shall be supported at the roaming II-NNI in the direction from visited to home network. Based on inter-operator agreement, the REFER request may be supported at the non-roaming II-NNI, for the loopback traversal scenario, and at the roaming II-NNI in the direction from home network to visited network.

NOTE 2: If the REFER request is not supported at the non-roaming II-NNI, for the loopback traversal scenario, or at the roaming II-NNI in the direction from home network to visited network, an attempt of an UE to send the REFER directly to peers to invite them to a conference without involvement of the conference focus can fail over such an II-NNI. However such failures can also occur if a peer is located in a circuit switched network, or if a peer does not support the REFER method. An operator can avoid such failures by configuring an AS to convert the REFER to an INVITE, as detailed in 3GPP TS 24.628 [38]. Information on security risks associated with the REFER request is provided within the "security consideration" of IETF RFC 3515 [22].

NOTE 3: A REFER request can be rejected by IBCF based on operator policy as specified by 3GPP TS 24.229 [5].

The application/resource-lists+xml MIME body shall be supported at the roaming II-NNI.

The Referred-By header field in the INVITE request shall be supported at the II-NNI.

The "isfocus" feature parameter indicated in Contact header field of the INVITE request and in the 200 (OK) response shall be supported at the II-NNI.

The SUBSCRIBE request including the "conference" event package name in the Event header field and the NOTIFY request procedures according to 3GPP TS 24.147 [106] shall be supported at the II-NNI.

NOTE 4: The subscription to "conference event" package does not apply at the roaming II-NNI between the MSC Server enhanced for ICS/MSC Server enhanced for SRVCC/MSC server enhanced for dual radio and the IMS network where the communication is anchored.

The Allow-Events header field with the value "conference" shall be supported at the roaming II-NNI and may be supported at the non-roaming II-NNI and for the loopback traversal scenario.

12.20 Flexible Alerting (FA)

Service specific requirements in accordance with 3GPP TS 24.239 [101] shall be supported over the II-NNI.

The 486 (Busy Here) response code shall be supported at the II-NNI.

SIP based user configuration as described in 3GPP TS 24.238 [100] shall be supported at the roaming II-NNI.

12.21 Announcements

12.21.1 General

Announcements may be provided during the establishment of a communication session, during an established communication session or when a communication request is rejected. All of them shall be managed over the II-NNI.

12.21.2 Providing announcements during the establishment of a communication session

Procedures as described in 3GPP TS 24.628 [38] are used to provide announcements.

The P-Early-Media header field authorizing early media as defined in IETF RFC 5009 [74] during the establishment of a communication shall be supported at the II-NNI.

The Alert-Info header field in the 180 (Ringing) response to the INVITE request during the establishment of a communication, should be supported at the II-NNI.

NOTE: The IBCF can decide to remove the Alert-Info header field if required by local policy.

12.21.3 Providing announcements during an established communication session

Procedures as described in 3GPP TS 24.628 [38] are used to provide announcements.

In case of provision of an announcement to a user over the II-NNI during an established communication, the Call-Info header field in a re-INVITE request should be supported at the II-NNI.

NOTE 1: An alternative method to provide announcements is to use the existing media stream.

NOTE 2: The IBCF can decide to remove the Call-Info header field if required by local policy.

12.21.4 Providing announcements when communication request is rejected

Procedures as described in 3GPP TS 24.628 [38] are used to provide announcements when a communication request is rejected.

There are three methods defined in 3GPP TS 24.628 [38] to provide the announcement:

- 1) sending an announcement as an early media;
- 2) return an Error-Info header field; and
- 3) accept the communication request and then provide the announcement.

NOTE 1: The II-NNI requirements for accepting the communication request and then provide the announcement is not within the scope of this subclause.

The P-Early-Media header field authorizing early media as defined in IETF RFC 5009 [74] and the Reason header field with the proper cause value shall be supported at the II-NNI.

NOTE 2: There are 2 methods to use early media for sending the announcement in-band. First method is the gateway model defined by IETF RFC 3960 [150], second method is described in 3GPP TS 24.628 [38] annex D.

The Error-Info header field in the 3xx, 4xx, 5xx or 6xx response to the INVITE request when rejecting the communication request, should be supported at the II-NNI.

NOTE 3: The IBCF can decide to remove the Error-Info header field if required by local policy.

12.22 Advice of Charge (AOC)

Service specific requirements in accordance with 3GPP TS 24.647 [122] shall be supported over the II-NNI.

The Accept header field with "application/vnd.etsi.aoc+xml" shall be supported at the roaming II-NNI.

The INVITE method containing an "application/vnd.etsi.aoc+xml" MIME body shall be supported at the roaming II-NNI.

Non-100 provisional responses and the 200 (OK) response to the initial INVITE request containing an "application/vnd.etsi.aoc+xml" MIME body shall be supported at the roaming II-NNI.

The INFO method containing an "application/vnd.etsi.aoc+xml" MIME body shall be supported at the roaming II-NNI.

The response code 504 (Server Time-out) shall be supported at the II-NNI.

A Reason header field containing the protocol value set to "SIP" and the "cause" header field parameter set to "504" or containing the protocol value set to "Q.850" and the "cause" header field parameter set to "31" in the BYE method shall be supported at the II-NNI.

An "application/vnd.etsi.aoc+xml" MIME body in the BYE request or the final response to the BYE request shall be supported over the roaming II-NNI.

12.23 Completion of Communications on Not Logged-in (CCNL)

Service specific requirements in accordance with 3GPP TS 24.642 [109] shall be supported over the II-NNI.

The response code 480 (Temporarily unavailable) containing a Call-Info header field with a purpose parameter set to 'call-completion' and the m parameter set to "NL" shall be supported at the non-roaming II-NNI and for the loopback traversal scenario.

For invoking and revoking of the CCNL supplementary service, announcement procedures shall be used to provide announcements and inband-interaction procedures as described in clause 12.21.3 and clause 12.21.4 shall be supported at the roaming II-NNI.

The response code 199 (Early Dialog Terminated) shall be supported at the roaming II-NNI.

Basic call procedures and in case of a call-completion recall initiated by a REFER request, normal REFER method handling procedures according to 3GPP TS 24.229 [5] shall be supported at the roaming II-NNI.

As a network option the special REFER request handling procedures according to 3GPP TS 24.628 [38] should be supported at the roaming II-NNI.

NOTE: 3rd party call control procedures can be used when the REFER request is not supported at the II-NNI.

The SUBSCRIBE and NOTIFY methods according to IETF RFC 6665 [20] and 3GPP TS 24.229 [5] containing the event package name "call-completion" in the Event header field and the Call-Info header field with a purpose parameter set to 'call-completion' and the m parameter set to "NL" shall be supported at the non-roaming II-NNI and for the loopback traversal scenario.

The Request-URI with the "m" SIP URI parameter with a value set to "NL" and the Call-Info header field with a purpose parameter set to 'call-completion' and the "m" parameter set to "NL" in the INVITE method shall be supported at the non-roaming II-NNI and for the loopback traversal scenario.

The Date header field in the 480 (Temporarily Unavailable) response to the INVITE request shall be supported at the roaming II-NNI.

SIP based user configuration as described in 3GPP TS 24.238 [100] shall be supported at the roaming II-NNI.

12.24 Unstructured Supplementary Service Data (USSD)

Service specific requirements in accordance with 3GPP TS 24.390 [163] shall be supported over the II-NNI.

The Recv-Info header field containing the "g.3gpp.ussd" info package name and the "application/vnd.3gpp.ussd" MIME body as described in annex B of 3GPP TS 24.390 [163] in the INVTE request shall be supported at the roaming II-NNI.

The Recv-Info header field containing the "g.3gpp.ussd" info package name in the 200 (OK) response to the INVITE request shall be supported at the roaming II-NNI.

The INFO request containing "application/vnd.3gpp.ussd" MIME body and the Info-Package header field containing the "g.3gpp.ussd" info package name shall be supported at the roaming II-NNI.

The "application/vnd.3gpp.ussd" MIME body in the BYE request shall be supported at the roaming II-NNI.

13 Interoperability of IMS Centralized Services (ICS) over II-NNI

13.1 General

In order to assure the end-to-end service interoperability through the Inter-IMS Network to Network Interface (II-NNI), the associated service of the IMS Centralized Services (ICS) may be supported on the II-NNI between two IMS networks. The support of ICS is based on agreement between operators.

If ICS is supported, the related procedures from the 3GPP TS 24.292 [121] and 3GPP TS 29.292 [130] shall be applied with the requirements in the clause 13.2 due to the crossing of the II-NNI.

13.2 IMS Centralized Services (ICS)

Service specific requirements in accordance with 3GPP TS 24.292 [121] and 3GPP TS 29.292 [130] shall be supported over the II-NNI.

The "g.3gpp.ics" media feature tag in the Contact header field as specified in annex B of 3GPP TS 24.292 [121] shall be supported at the roaming II-NNI.

The "g.3gpp.accesstype" media feature tag in the Contact header field as specified in annex B of 3GPP TS 24.292 [121] shall be supported at the roaming II-NNI.

The "g.3gpp.icsi-ref" media feature tag as specified in 3GPP TS 24.229 [5] the value for the IMS Multimedia Telephony Communication Service as specified in 3GPP TS 24.173 [31] shall be supported at the roaming II-NNI.

An Accept-Contact header field and a Reject-Contact header field including the media feature tag "g.3gpp.accesstype" and the media feature tag "g.3gpp.ics" in any combination in the INVITE request shall be supported at the roaming II-NNI.

The Target-Dialog header field in the INVITE request shall be supported at the roaming II-NNI.

The P-Early-Media header field in the INVITE request and in non-100 provisional responses to the INVITE request shall be supported on the roaming II-NNI.

The Reason header field containing the protocol value "Q.850" and the header field parameter "cause" with a various set of values in the CANCEL request, the BYE request and in 4xx responses and 6xx responses to the INVITE request shall be supported at the roaming II-NNI.

The REFER request with the "method" SIP URI parameter set to the value "BYE" or "INVITE" or without the "method" SIP URI parameter in the Refer-To header field as specified in 3GPP TS 24.292 [121] shall be supported at the roaming II-NNI.

NOTE 1: The subscription to the conference package is not allowed according to 3GPP TS 24.292 [121] and the support of the SUBSCRIBE request and associated NOTIFY requests for subscribing to the conference event package is not a requirement at the II-NNI in this release of the technical specification.

NOTE 2: Supplementary services as specified in clause 12 can be supported based on agreement between operators.

14 Interoperability of IMS Service Continuity over II-NNI

14.1 General

In order to assure the end-to-end service interoperability through the Inter-IMS Network to Network Interface (II-NNI), the associated services of the IMS Service Continuity may be supported on the II-NNI between two IMS networks. The support of each service is based on agreement between operators.

If a service is supported, the related procedures from the 3GPP TS 24.237 [131] shall be applied with the requirements in the relevant clause below due to the crossing of the II-NNI.

14.2 PS to CS Single Radio Voice Call Continuity (SRVCC) and Single Radio Video Call Continuity (vSRVCC)

14.2.1 Basic PS to CS SRVCC

Service specific requirements in accordance with 3GPP TS 24.237 [131] shall be supported over the roaming II-NNI.

Media type "video" in SDP m-lines may be supported at the roaming II-NNI. Related SDP can appear in SDP offer answer exchanges within SIP INVITE dialogues at the roaming II-NNI, and in responses to SIP OPTIONS requests at the roaming II-NNI. If media type "video" is supported within SIP INVITE dialogues at the roaming II-NNI, it shall also be supported within responses to SIP OPTIONS requests at the roaming II-NNI.

The "+g.3gpp.srvcc" header field parameter (specified in 3GPP TS 24.237 [131] annex C) in the Feature-Caps header field of the INVITE request and in non-100 provisional responses or the 2xx response should be supported at the roaming II-NNI.

The Reason header field containing the protocol value set to "SIP" and "cause" header field parameter set to "487" in the SIP re-INVITE request shall be supported at the roaming II-NNI.

The Reason header field containing the protocol value set to "SIP" and "cause" header field parameter set to "503" in the SIP BYE request shall be supported at the roaming II-NNI.

Procedures as described in clause 14.4 are used to provide MSC server assisted mid-call features.

14.2.2 PS to CS SRVCC for calls in alerting phase

The requirements for the PS to CS transfer for alerting calls are the same as in clause 14.2.1 with the following additional requirements:

The "g.3gpp.srvcc-alerting" media feature tag (described in 3GPP TS 24.237 [131] annex C) in a Contact header field of the INVITE request and in non-100 provisional responses and the 2xx response to the INVITE request shall be supported at the roaming II-NNI.

The "+g.3gpp.srvcc-alerting" header field parameter (described in 3GPP TS 24.237 [131] annex C) included in a Feature-Caps header field as described in IETF RFC 6809 [143] in a SIP INVITE request and in non-100 provisional responses and the 2xx response to the INVITE request or in the UPDATE request and in the 2xx response to the UPDATE request shall be supported at the roaming II-NNI.

The Target-Dialog header field in the INVITE request shall be supported at the roaming II-NNI.

An INFO request containing the Info-Package header field as specified in IETF RFC 6086 [39] with "3gpp.state-and-event" info package name and an "application/vnd.3gpp.state-and-event-info +xml" XML body shall be supported at the roaming II-NNI.

14.2.3 Using the ATCF based architecture

The requirements for the ATCF based architecture is the same as in clause 14.2.1 with the following additional requirements:

The "+g.3gpp.atcf", the "+g.3gpp.atcf-mgmt-uri" and the "+g.3gpp.atcf-path" header field parameters (specified in 3GPP TS 24.237 [131] annex C) in the Feature-Caps header field of the REGISTER request as described in IETF RFC 6809 [143] shall be supported at the roaming II-NNI.

A MESSAGE request containing the "application/vnd.3gpp.srvcc-info+xml" MIME body as defined in annex D of 3GPP TS 24.237 [131] shall be supported at the roaming II-NNI.

The URIs of SCC ASs authorised to provide PS to CS SRVCC information in the MESSAGE request need to be specified in the roaming agreement.

The Target-Dialog header field in the INVITE request shall be supported at the roaming II-NNI.

14.2.4 PS to CS SRVCC for originating calls in pre-alerting phase

The requirements for the PS to CS transfer for originating calls in pre-alerting phase are the same as in clause 14.2.1 and in clause 14.2.2 with the additional requirements in this subclause.

NOTE: If PS to CS transfer for originating calls in pre-alerting phase is supported also PS to CS SRVCC for calls in alerting phase specified in clause 14.2.2 is supported.

The "g.3gpp.ps2cs-srvcc-orig-pre-alerting" media feature tag described in 3GPP TS 24.237 [131] annex C in a Contact header field of the REGISTER request and in the INVITE request shall be supported at the roaming II-NNI.

The "g.3gpp.ps2cs-srvcc-orig-pre-alerting" feature-capability indicator as described in 3GPP TS 24.237 [131] annex C in the Feature-Caps header field as described in IETF RFC 6809 [143] in non-100 provisional responses and the 2xx

response to the INVITE request and in any target refresh request and in non-100 provisional responses or the 2xx response to target refresh request shall be supported at the roaming II-NNI.

14.2.5 PS to CS SRVCC with the MSC server assisted mid-call feature

The requirements for the PS to CS SRVCC with the assisted mid-call feature are the same as in clause 14.2.1 and in clause 14.4.

14.3 Inter UE Transfer (IUT)

IUT is described in clause 18.

14.4 MSC server assisted mid-call feature

Service specific requirements in accordance with 3GPP TS 24.237 [131] shall be supported over the roaming II-NNI.

The Contact header field of the REGISTER request and the 200 (OK) response containing "g.3gpp.mid-call" media feature tag as described in annex C of 3GPP TS 24.237 [131] shall be supported at the roaming II-NNI.

The Feature-Cap header field of the REGISTER request and the 200 (OK) response containing "+g.3gpp.mid-call" header field parameter specified in annex C of 3GPP TS 24.237 [131] shall be supported at the roaming II-NNI.

The media feature tag "g.3gpp.accesstype" in the Contact header field of the REGISTER request shall be supported at roaming II-NNI.

A Contact header field of the INVITE request and the 200 (OK) response containing the "g.3gpp.mid-call" media feature tag as described in annex C of 3GPP TS 24.237 [131] shall be supported at the roaming II-NNI.

The g.3gpp.mid-call feature-capability indicator according to 3GPP TS 24.237 [131] annex C included in the Feature-Caps header field of the INVITE request, in responses to the INVITE request and in any target refresh request and in non-100 provisional responses or the 2xx response to target refresh request shall be supported at the roaming II-NNI.

The Recv-Info header field containing the "g.3gpp.mid-call" package name in the INVITE request as specified in annex D of 3GPP TS 24.237 [131] shall be supported at the roaming II-NNI.

An Accept header field in the INVITE request containing the MIME type "application/vnd.3gpp.mid-call+xml" as specified in clause D.1 of 3GPP TS 24.237 [131] shall be supported at the roaming II-NNI.

The "application/vnd.3gpp.mid-call+xml" MIME body described in clause D.1.3 of 3GPP TS 24.237 [131] in the INVITE request shall be supported at the roaming II-NNI.

The SUBSCRIBE request containing a "g.3gpp.mid-call" media feature tag in the Contact header field shall be supported at the roaming II-NNI.

NOTE: The "g.3gpp.mid-call" media feature tag in the Contact header field of the SUBSCRIBE request may appear if the CONF supplementary service is supported at roaming II-NNI as described in clause 12.9.

An INFO request containing the Info-Package header field as specified in IETF RFC 6086 [39] with "3gpp.state-and-event" info package name and an "application/vnd.3gpp.state-and-event-info+xml" XML body shall be supported at the roaming II-NNI.

A REFER request sent inside an existing SIP dialog containing the "application/vnd.3gpp.mid-call+xml" MIME body specified in the clause D.1.3 of 3GPP TS 24.237 [131] shall be supported at the roaming II-NNI.

The Contact header field of the REFER request and the 2xx response to the request containing "g.3gpp.mid-call" media feature tag as described in annex C of 3GPP TS 24.237 [131] shall be supported at the roaming II-NNI.

The Target-Dialog header field in the INVITE request shall be supported at the roaming II-NNI.

The communication HOLD supplementary service as specified in clause 12.8 for the roaming II-NNI shall be supported.

14.5 CS to PS Single Radio Voice Call Continuity (SRVCC)

14.5.1 Basic CS to PS SRVCC

Service specific requirements in accordance with 3GPP TS 24.237 [131] shall be supported over the roaming II-NNI.

Requirements for the ATCF based architecture at II-NNI as described in clause 14.2.3 shall be supported at the roaming II-NNI.

Requirements for IMS Centralized Services (ICS) at II-NNI as described in clause 13 shall be supported at the roaming II-NNI.

The "g.3gpp.cs2ps-srvcc" and "g.3gpp.path" media feature tags in the Contact header field of the REGISTER request shall be supported at the roaming II-NNI.

The Feature-Caps header field with the "g.3gpp.cs2ps-srvcc" feature-capability indicator in the REGISTER request shall be supported at the roaming II-NNI.

The MESSAGE request containing the Accept-Contact header field with the "g.3gpp.path" media feature tag and the "application/vnd.3gpp.srvcc-ext+xml" MIME body shall be supported at the roaming II-NNI.

The URIs of SCC ASs authorised to provide CS to PS SRVCC information in the MESSAGE request need to be specified in the roaming agreement.

14.5.2 CS to PS SRVCC for calls in alerting phase

The requirements for the CS to PS SRVCC for calls in alerting phase are the same as in clause 14.5.1 with the following additional requirement:

The "g.3gpp.cs2ps-srvcc-alerting" media feature tag in the Contact header field of the REGISTER request shall be supported at the roaming II-NNI.

The REFER request sent inside an existing SIP dialog with the Refer-Sub header field and the "application/vnd.3gpp.state-and-event-info+xml" MIME body shall be supported at the roaming II-NNI.

The INFO request with the Info-Package header field containing the "g.3gpp.state-and-event" package name and the "application/vnd.3gpp.state-and-event-info+xml" MIME body shall be supported at the roaming II-NNI.

14.5.3 CS to PS SRVCC with the assisted mid-call feature

The requirements for the CS to PS SRVCC with the assisted mid-call feature are the same as in clause 14.5.1 with the following additional requirement:

The "application/vnd.3gpp.access-transfer-events+xml" MIME body in the REFER request shall be supported at the roaming II-NNI.

14.6 PS to CS dual radio voice call continuity (DRVCC)

14.6.1 Basic PS to CS DRVCC

Service specific requirements in accordance with 3GPP TS 24.237 [131] shall be supported over the roaming II-NNI.

The "g.3gpp.dynamic-stn" media feature tag according to 3GPP TS 24.237 [131] annex C included in the Contact header field of the INVITE request and in responses to the SIP INVITE request shall be supported at the roaming II-NNI.

The "g.3gpp.dynamic-stn" feature-capability indicator according to 3GPP TS 24.237 [131] annex C included in the Feature-Caps header field of the INVITE request, in responses to the INVITE request and in any target refresh request and in non-100 provisional responses or the 2xx response to target refresh request shall be supported at the roaming II-NNI.

NOTE 1: The g.3gpp.dynamic-stn feature capability indicator from the home network contains an STN. The STN is a tel URI that the UE will use when establishing the call in CS. If the STN is known by the visited network the STN can also be used to identify that a call from a UE is a PS to CS dual radio access transfer allowing the visited network to suppress services and announcement that otherwise is executed during the CS call setup. The value of the tel URI STN needs to be communicated between operators when DRVCC is supported.

The requirements for providing IMS Centralized Services (ICS) as described in clause 13.2 should be supported at the roaming II-NNI.

NOTE 2: The support of IMS Centralized Services (ICS) as described in clause 13.2 is only needed if MSC servers in the visited network are enhanced for ICS.

14.6.2 PS to CS DRVCC with the assisted mid-call feature

The requirements for the PS to CS DRVCC with the assisted mid-call feature are the same as in clause 14.6.1 and in clause 14.4.

NOTE: Transfer of an additional call requires the use of IMS Centralized Services (ICS).

14.6.3 PS to CS DRVCC for calls in alerting phase

The requirements for the PS to CS DRVCC for calls in alerting phase are the same as in clause 14.6.1 with the additional requirements in this subclause.

The "g.3gpp.drvcc-alerting" media feature tag according to 3GPP TS 24.237 [131] annex C and IETF RFC 3840 [56] included in the Contact header field of the INVITE request and in responses to the SIP INVITE request shall be supported at the roaming II-NNI.

The "g.3gpp.drvcc-alerting" feature-capability indicator according to 3GPP TS 24.237 [131] annex C included in the Feature-Caps header field of the INVITE request, in responses to the INVITE request and in any target refresh request and in non-100 provisional responses or the 2xx response to target refresh request shall be supported at the roaming II-NNI

A 488 (Not Acceptable Here) response to the INVITE request without an SDP body shall be supported at the roaming II-NNI.

14.6.4 PS to CS DRVCC for originating calls in pre-alerting phase

The requirements for the PS to CS DRVCC for originating calls in pre-alerting phase are the same as in clause 14.6.1 and in clause 14.6.3 with the additional requirements in this subclause.

The "g.3gpp.ps2cs-drvcc-orig-pre-alerting" media feature tag according to 3GPP TS 24.237 [131] annex C and IETF RFC 3840 [56] in the Contact header field of the SIP INVITE request shall be supported at the roaming II-NNI.

The "g.3gpp.ps2cs-drvcc-orig-pre-alerting" feature-capability indicator according to 3GPP TS 24.237 [131] annex C included in the Feature-Caps header field of the INVITE request, in responses to the SIP INVITE request and in any target refresh request and in non-100 provisional responses or the 2xx response to target refresh request shall be supported at the roaming II-NNI.

14.7 CS to PS Dual Radio Voice Call Continuity (DRVCC)

14.7.1 Basic CS to PS DRVCC

Service specific requirements in accordance with 3GPP TS 24.237 [131] shall be supported over the roaming II-NNI.

The requirements for providing IMS Centralized Services (ICS) as described in clause 13.2 should be supported at the roaming II-NNI.

NOTE: The support of IMS Centralized Services (ICS) as described in clause 13.2 is only needed if MSC servers in the visited network are enhanced for ICS.

14.7.2 CS to PS DRVCC with the assisted mid-call feature

The requirements for the PS to CS DRVCC with the assisted mid-call feature are the same as in clause 14.7.1 and in clause 14.4.

14.7.3 CS to PS DRVCC for calls in alerting phase

The requirements for the CS to PS DRVCC for calls in alerting phase are the same as in clause 14.7.1 with the additional requirements in this subclause.

The "g.3gpp.cs2ps-drvcc-alerting" media feature tag as described included in the Contact header field of the INVITE request and in responses to the INVITE request shall be supported at the roaming II-NNI.

The "g.3gpp.cs2ps-drvcc-alerting" feature-capability indicator according to 3GPP TS 24.237 [131] annex C included in the Feature-Caps header field of the INVITE request, in responses to the INVITE request and in any target refresh request and in non-100 provisional responses or the 2xx response to target refresh request shall be supported at the roaming II-NNI.

A 488 (Not Acceptable Here) response to the INVITE request without an SDP body shall be supported at the roaming II-NNI.

14.7.4 CS to PS DRVCC for originating calls in pre-alerting phase

The requirements for the CS to PS DRVCC for originating calls in pre-alerting phase are the same as in clause 14.7.1 and in clause 14.7.3 with the following additional requirements:

The "g.3gpp.cs2ps-drvcc-orig-pre-alerting" media feature tag according to 3GPP TS 24.237 [131] annex C and IETF RFC 3840 [56] in the Contact header field of the INVITE request shall be supported at the roaming II-NNI.

The "g.3gpp.cs2ps-drvcc-orig-pre-alerting" feature-capability indicator according to 3GPP TS 24.237 [131] annex C included in the Feature-Caps header field of the INVITE request, in responses to the INVITE request and in any target refresh request and in non-100 provisional responses or the 2xx response to target refresh request shall be supported at the roaming II-NNI.

14.8 PS to PS access transfer

Service specific requirements in accordance with 3GPP TS 24.237 [131] clause 10 shall be supported over the roaming II-NNI.

The "g.3gpp.pstops-sti" media feature tag in the Contact header field of the REGISTER request shall be supported at the roaming II-NNI.

The INVITE request containing:

- a) the "g.3gpp.ics media" feature tag; and
- b) either:
 - the Replaces header field and the option tag value "replaces" in the Require header field; or
 - the Target-Dialog header field and the option tag value "tdialog" in the Require header field,

shall be supported at the roaming II-NNI.

A Recv-Info header field containing the "g.3gpp.state-and-event" info package name in the 183 (Session Progress) response shall be supported at the roaming II-NNI.

The INFO request containing the Info-Package header field as specified in IETF RFC 6086 [39] with the "g.3gpp.state-and-event" info package name and the "application/vnd.3gpp.state-and-event-info+xml" XML body shall be supported at the roaming II-NNI.

15 Presence service

15.0 General

In order to assure the end-to-end service interoperability through the Inter-IMS Network to Network Interface (II-NNI), the associated functions of the Presence service may be supported on the II-NNI between two IMS networks. The support of each function is based on agreement between operators.

If a function is supported, the related procedures from the 3GPP TS 24.141 [132] shall be applied with the requirements in the relevant clause below due to the crossing of the II-NNI.

15.1 Subscription of presence information

Service specific requirements in accordance with 3GPP TS 24.141 [132] shall be supported over the II-NNI.

A PUBLISH request identifying the Presentity using a SIP URI, a tel URI or a PRES URI and the Event header field with the value "presence" and containing an "application/pidf+xml" MIME body shall be supported at the roaming II-NNI.

Additionally to the above and in any combination, a "multipart/related" content type and an "application/pidf-diff+xml" MIME body can be included in the PUBLISH request and shall be supported at the roaming II-NNI.

A SUBSCRIBE request with a Request-URI containing a SIP URI, a TEL URI or a pres URI, the Event header field set to "presence" and Accept header fields with values "application/pidf+xml" and "multipart/related" shall be supported at the II-NNI.

Additionally to the above an "application/simple-filter+xml" MIME body can appear in the SUBSCRIBE request and shall be supported at the II-NNI.

Additionally to the above and in any combination a "multipart/mixed" content type and an "application/resource-lists" MIME body can appear in the SUBSCRIBE request and shall be supported at the roaming II-NNI.

A NOTIFY request including an Event header field with the value "presence" and an "application/pidf" MIME body shall be supported at the II-NNI.

NOTE: The NOTIFY request can contain substantial amount of data and TCP is expected to be used as the transport protocol.

The Allow-Events header field with the value "presence" shall be supported at the roaming II-NNI and may be supported at the non-roaming II-NNI.

15.2 Watcher subscribing to Presence List

Service specific requirements in accordance with 3GPP TS 24.141 [132] shall be supported over the II-NNI.

The requirements for the watcher subscribing to the Presence List are the same as subscribing to presence information as specified in clause 15.1 with the following additional requirement:

- The SUBSCRIBE request containing a Supported header field with the value "eventlist" shall also be supported at the roaming II-NNI;
- The SUBSCRIBE request containing a Accept header field with the value "application/rlmi+xml" shall be supported at the roaming II-NNI;
- A response code 200 (OK) to the SUBSCRIBE request containing the Require header field with the value "eventlist" shall be supported at the roaming II-NNI; and
- A NOTIFY message containing the "multipart/related" content type and an "application/rlmi+xml" MIME body shall be supported at the roaming II-NNI.

NOTE: The NOTIFY request can contain substantial amount of data and TCP is expected to be used as the transport protocol.

15.3 Subscription to Watcher Information

Service specific requirements in accordance with 3GPP TS 24.141 [132] shall be supported over the II-NNI.

A SUBSCRIBE request containing an Event header field with the value "presence.wininfo" and an Accept header field with value "application/watcherinfo+xml" shall be supported at the roaming II-NNI.

A NOTIFY request containing the Event header field with the value "presence.wininfo" and an "application/watcherinfo+xml" MIME body shall be supported at the roaming II-NNI.

NOTE: The NOTIFY request can contain substantial amount of data and TCP is expected to be used as the transport protocol.

The Allow-Events header field with the value "presence.wininfo" shall be supported at the roaming II-NNI and may be supported at the non-roaming II-NNI.

15.4 Subscription to state changes in XML documents

Service specific requirements in accordance with 3GPP TS 24.141 [132] shall be supported over the II-NNI.

A SUBSCRIBE request containing the Event header field with the value "xcap-diff" and parameters specified in IETF RFC 5875 [134], using the updated procedures from IETF RFC 6665 [20], shall be supported at the roaming II-NNI.

A NOTIFY request containing the Event header field with the value "xcap-diff", the "multipart/mixed" content type and any MIME body shall be supported at the roaming II-NNI.

NOTE: The NOTIFY request can contain substantial amount of data and TCP is expected to be the transport protocol.

The Allow-Events header field with the value "xcap-diff" shall be supported at the roaming II-NNI and may be supported at the non-roaming II-NNI.

For backward compatible reasons the Event header field with the value "ua-profile" should be supported at the roaming II-NNI.

15.5 Presence enhancements specified in Open Mobile Alliance (OMA) Release 1.1

15.5.1 General

In order to assure the end-to-end service interoperability through the Inter-IMS Network to Network Interface (II-NNI), the associated functions of the OMA Presence service may be supported on the II-NNI between two IMS networks. The support of each function is based on agreement between operators.

If a function of the OMA Presence Release 1.1 is supported, the related procedures from the OMA-TS-Presence_SIMPLE-V1_1_1 [142] shall be applied with the requirements in the relevant clause below due to the crossing of the II-NNI.

15.5.2 OMA subscription of presence information

The requirements for the OMA subscription of presence information are the same as clause 15.1.

15.5.3 OMA watcher subscribing to Presence List

The requirements for the OMA watcher subscribing to Presence List are the same as clause 15.2.

15.5.4 OMA subscription to Watcher Information

The requirements for the OMA subscription to Watcher Information are the same as clause 15.3.

15.6 Presence enhancements specified in Open Mobile Alliance (OMA) Release 2.0

15.6.1 General

In order to assure the end-to-end service interoperability through the Inter-IMS Network to Network Interface (II-NNI), the associated functions of the OMA Presence service may be supported on the II-NNI between two IMS networks. The support of each function is based on agreement between operators.

If a function of the OMA Presence Release 2.0 is supported, the related procedures from the OMA-TS-Presence_SIMPLE-V2_0 [138] shall be applied with the requirements in the relevant clause below due to the crossing of the II-NNI.

15.6.2 OMA subscription of presence information

The requirements for the OMA subscription of presence information are the same as clause 15.5.2 with the following additional requirement:

- An Allow header field containing the value "REFER" in a PUBLISH request shall be supported at the II-NNI.
- A Policy-Contact header field defined in IETF RFC 6794 [133] in a 488 (Not Acceptable Here) response to a PUBLISH request shall be supported at the II-NNI.

NOTE: Conveyance of this header field in a 488 response to a PUBLISH request is not supported by IETF RFC 6794 [133] but is required to support Presence services according to OMA specifications OMA-TS-Presence SIMPLE-V2 0 [138].

- A Suppress-If- Match header field in a SUBSCRIBE request shall be supported at the II-NNI.
- An Accept-Encoding header field containing the value "gzip" in a SUBSCRIBE request shall be supported at the II-NNI.
- An "application/vnd.oma.suppnot+xml" MIME body in a SUBSCRIBE request shall be supported at the II-NNI.
- A Content-Encoding header field containing the value "gzip" in a NOTIFY request shall be supported at the II-NNI.
- A "multipart/mixed" content type in a SUBSCRIBE request shall be supported at the II-NNI.
- A Refer-To header field with the value "method=PUBLISH?event=presence", a Refer-Sub header field and a SIP-If-Match header field in a REFER request shall be supported at the II-NNI.

15.6.3 OMA watcher subscribing to Presence List

The requirements for the OMA watcher subscribing to Presence List are the same as clause 15.5.3 with the following additional requirements:

- A Suppress-If-Match header field in a SUBSCRIBE request shall be supported at the II-NNI.
- An Accept-Encoding header field containing the value "gzip" in a SUBSCRIBE request shall be supported at the II-NNI.
- A body containing an "application/vnd.oma.suppnot+xml" content type in a SUBSCRIBE request shall be supported at the II-NNI.
- A body containing an "application/resource-lists+xml" content type in a SUBSCRIBE request shall be supported at the II-NNI.

- A "multipart/mixed" content type in a SUBSCRIBE request shall be supported at the II-NNI.
- A NOTIFY request with a Content-Encoding header field containing the value "gzip" shall be supported at the II-NNI.

15.6.4 OMA subscription to Watcher Information

The requirements for the OMA subscription to Watcher Information are the same as clause 15.5.4 with the following additional requirements:

- Indicating support for "multipart/mixed" and "application/simple-filter+xml" in the Accept header field of the SUBSCRIBE request shall be supported at the II-NNI.
- Multiple "application/simple-filter+xml" MIME bodies in the NOTIFY request shall be supported at the II-NNI.
- A Suppress-If-Match header field in a SUBSCRIBE request shall be supported at the II-NNI.
- An Accept-Encoding header field containing the value "gzip" in the SUBSCRIBE request shall be supported at the II-NNI.
- A body with multiple content of the "multipart/mixed" content type in a NOTIFY request shall be supported at the II-NNI.
- A Content-Encoding header field with the value "gzip" in a NOTIFY request shall be supported at the II-NNI.
- A Refer-To header field with the value "method=SUBSCRIBE?Event=presence.winfo" and a Refer-Sub header field in a REFER request sent to a Watcher Information Subscriber shall be supported at the II-NNI.

15.6.5 Subscription to state changes in XML documents

The requirements for the OMA watcher subscribing to Presence List are the same as clause 15.4 with the following additional requirements:

- An Accept header field indicating the support for "application/xcap-diff+xml", "application/rlmi+xml" and "multipart/related" in a SUBSCRIBE request shall be supported at the II-NNI.
- An Accept-Encoding header field with the value "gzip" in a SUBSCRIBE request shall be supported at the II-NNI
- A Content-Encoding header field containing the value "gzip" in a NOTIFY request shall be supported at the II-NNI.
- Multiple "multipart/related" MIME bodies in a NOTIFY request shall be supported at the II-NNI.
- An "application/rlmi+xml" MIME bodies in a NOTIFY request shall be supported at the II-NNI.

15.6.6 Void

15.6.7 Void

16 Messaging service

16.1 General

In order to assure the end-to-end service interoperability through the Inter-IMS Network to Network Interface (II-NNI), the associated function of the messaging service may be supported on the II-NNI between two IMS networks.

If a function is supported, the related procedures from the 3GPP TS 24.247 [139] shall be applied with the requirements in the relevant clause below due to the crossing of the II-NNI.

16.2 Page-mode messaging

Service specific requirements in accordance with clause 5 of 3GPP TS 24.247 [139] shall be supported over the II-NNI.

A MESSAGE request containing the "application/recipient-list" MIME body specified in IETF RFC 5365 [67], a Required header field with the 'recipient-list-message' option-tag; and a body carrying payload shall be supported at the roaming II-NNI.

A MESSAGE request containing:

- a body that carrying payload; or
- the "application/im-iscomposing+xml" MIME body.

shall be supported at the II-NNI.

The response code 415 (Unsupported Media Type) and the response code 202 (Accepted) shall be supported at the II-NNI.

16.4 Session-mode messaging

Service specific requirements in accordance with clause 6 of 3GPP TS 24.247 [139] shall be supported over the II-NNI.

No restrictions at the II-NNI identified.

16.5 Session-mode messaging conferences

Service specific requirements in accordance with clause 7 of 3GPP TS 24.247 [139] shall be supported over the II-NNI.

The "application/resource-lists+xml" MIME body included in the INVITE request shall be supported at the roaming II-NNI.

The media feature tag "isfocus" in the Contact header field of the INVITE request and responses to the INVITE request shall be supported at the II-NNI.

The SUBSCRIBE request including the "conference" event package name in the Event header field and the NOTIFY request procedures according to 3GPP TS 24.147 [106] shall be supported at the II-NNI.

The REFER request containing a Referred-By header field and NOTIFY requests procedures according to 3GPP TS 24.147 [106] shall be supported at the II-NNI.

The REFER request containing the BYE method URI parameter in the Refer-To header shall be supported at the II-NNI.

The Referred-By header field in the INVITE request shall be supported at the II-NNI.

The Allow-Events header field with the value "conference" shall be supported at the roaming II-NNI and may be supported at the non-roaming II-NNI.

17 Optimal Media Routeing

17.1 General

Based on inter-operator agreement, the Optimal Media Routeing (OMR) procedures may be supported over the II-NNI,

If OMR procedures are supported, the procedures in 3GPP TS 29.079 [148] shall be applied and the capabilities below shall be provided at the II-NNI.

17.2 OMR related SDP attributes

The "visited-realm", "secondary-realm", "omr-codecs", "omr-m-att", "omr-s-att", "omr-m-bw", "omr-s-bw", "omr-s-cksum", and "omr-m-cksum" SDP attributes defined in 3GPP TS 24.229 [5] shall be supported at the II-NNI.

17.3 IP realm names

Operators need to agree on unique names for IP realms (as defined in 3GPP TS 29.079 [148]) used in their own and interconnecting networks to avoid a collision of IP realm names. Operators may choose to share an IP realm, and shall then also assign a single unique name to that realm. As defined in 3GPP TS 24.229 [5], a public IPv4 or IPv6 address reachable from the open internet is associated with the special realm "IN".

18 Inter-UE transfer (IUT)

18.1 General

Inter-UE transfer may be supported over the II-NNI. The IUT consist of several functional blocks, as described in the clauses below. The support of each of these functional blocks is based on agreement between operators.

If a function is supported, the related procedures from the 3GPP TS 24.337 [149] shall be applied with the requirements in the relevant clause below.

18.2 IUT without establishment of a collaborative session

Service specific requirements in accordance with 3GPP TS 24.337 [149] shall be supported over the II-NNI.

The REFER request shall be supported at the roaming II-NNI.

The Refer-To header field containing a body parameter including a Replaces header field and the Require header field set to "replaces" shall be supported at the roaming II-NNI.

The Refer-To header field containing a body parameter including a Target-Dialog header field and the Require header field set to "tdialog" shall be supported at the roaming II-NNI.

The Refer-To header field containing a body parameter including an Accept-Contact header field with the "g.3gpp.icsi-ref" media feature tag and a P-Preferred-Service header field set to the IMS communication service identifier shall be supported at the roaming II-NNI.

The Contact header field of the REFER request containing a public GRUU or temporary GRUU as specified in 3GPP TS 24.229 [5] shall be supported at the roaming II-NNI.

The "g.3gpp.icsi-ref" media feature tag in the Accept-Contact header field of the REFER request shall be supported at the roaming II-NNI.

NOTIFY requests containing a "sipfrag" MIME body as specified in IETF RFC 3515 [22], using the updated procedures from IETF RFC 6665 [20], shall be supported at the roaming II-NNI.

18.3 IUT using a collaborative session

18.3.1 Collaborative session of participants of the same subscription

This clause describes the requirements at the II-NNI for an ongoing session. Service specific requirements in accordance with 3GPP TS 24.337 [149] shall be supported over the II-NNI.

The "g.3gpp.iut-controller" media feature tag in the Accept-Contact header field in the REGISTER request shall be supported.

A REFER request sent outside an existing dialog shall be supported at the roaming II-NNI with the following additional requirements:

- The Refer-To header field containing a body parameter including a MIME sdp body and no method parameter, the method parameter set to "INVITE" or "BYE" shall be supported at the roaming II-NNI.
- The Accept header field containing the MIME type "message/sipfrag" in the REFER request shall be supported at the roaming II-NNI.
- The Target-Dialog header field in the REFER request shall be supported at the roaming II-NNI.
- The Contact header field in the REFER request containing the "g.3gpp.iut-controller" media feature tag as described in annex B of 3GPP TS 24.337 [149] shall be supported at the roaming II-NNI.
- The Contact header field in the REFER request containing the "g.3gpp current-iut-controller" media feature tag as described in annex B of 3GPP TS 24.337 [149] shall be supported at the roaming II-NNI.
- The "g.3gpp.iut-controller" media feature tag in the Accept-Contact header field shall be supported at the roaming II-NNI.
- The Referred-By header field shall be supported at the roaming II-NNI at the roaming II-NNI.

The NOTIFY request containing a "sipfrag" MIME body as specified in IETF RFC 3515 [22], using the updated procedures from IETF RFC 6665 [20], shall be supported at the roaming II-NNI.

Initial INVITE requests and re-INVITE requests as follows:

- The Referred-By header field included in initial INVITE requests and re-INVITE requests shall be supported at the roaming II-NNI;
- The "g.3gpp.iut-controller" media feature tag as described in annex B of 3GPP TS 24.337 [149] in the Contact header field shall be supported at the roaming II-NNI.

The "g.3gpp.iut-controller" media feature tag in SIP responses to the INVITE request shall be supported at the roaming II-NNI.

The SUBSCRIBE request including the Event header field with the "dialog" event package; and including the Accept-Contact header field with the "g.3gpp.iut-focus" media feature shall be supported at the roaming II-NNI.

The "dialog-info+xml" MIME body in NOTIFY requests shall be supported at the roaming II-NNI.

18.3.2 Establishment of a collaborative session during session setup

Service specific requirements in accordance with 3GPP TS 24.337 [149] shall be supported over the II-NNI.

The Accept header field containing the MIME type "application/vnd.3gpp.iut+xml" in initial INVITE requests shall be supported at the roaming II-NNI.

A SIP 300 (Multiple Choices) response a Content-Type header field containing the MIME type "application/vnd.3gpp.iut+xml" and an "application/vnd.3gpp.iut+xml" MIME body shall be supported at the roaming II-NNI.

18.3.3 Assignment and transfer of control of a collaborative session

Service specific requirements in accordance with 3GPP TS 24.337 [149] shall be supported over the II-NNI.

The "g.3gpp current-iut-controller" media feature tag in the Contact header of the SIP 200 (OK) response to INVITE request shall be supported at the roaming II-NNI.

A "multipart/mixed" MIME body containing the "application/vnd.3gpp.iut+xml" and the "application/sdp" MIME bodies in the INVITE request shall be supported at the roaming II-NNI.

18.3.4 Collaborative session of participants of different subscriptions

Service specific requirements in accordance with 3GPP TS 24.337 [149] shall be supported over the II-NNI.

In addition to the requirements in clause 18.3.1, 18.3.2 or 18.3.3 the following applies:

- The "g.3gpp.iut-focus" media feature tag (specified in 3GPP TS 24.337 [149] annex B) in the Contact header field shall be supported at the non-roaming II-NNI and for the loopback traversal scenario.
- The "+g.3gpp.iut-focus" header field parameter (specified in 3GPP TS 24.337 [149] annex B) in the Feature-Caps header field as described in IETF RFC 6809 [143] shall be supported at the non-roaming II-NNI and for the loopback traversal scenario.

18.4 Session replication / media replication

18.4.1 Pull mode

Service specific requirements in accordance with 3GPP TS 24.337 [149] shall be supported over the II-NNI.

The Target-Dialog header field and the Accept-Contact header field containing the "g.3gpp.iut-focus" media feature tag of the INVITE request shall be supported at the roaming II-NNI.

A REFER request including:

- the method parameter set to "MESSAGE" in the Refer-To header field;
- the In-Reply-To header field;
- the Target-Dialog header field;
- the Require header field populated with the option tag value "tdialog"; and
- the "application/vnd.3gpp.replication+xml" MIME body,

shall be supported at the roaming II-NNI.

A MESSAGE request the In-Reply-To header field and the "application/vnd.3gpp.replication+xml" MIME body shall be supported at the roaming II-NNI.

18.4.2 Push mode

Service specific requirements in accordance with 3GPP TS 24.337 [149] shall be supported over the II-NNI.

A REFER request including:

- the Accept-Contact header field containing the "g.3gpp.iut-focus" media feature tag with explicit and require tags;
- the Target-Dialog header field; and
- the Refer-To header field containing the Accept-Contact header field, the P-Preferred-Service header field and the "application/sdp" MIME body,

shall be supported at the roaming II-NNI.

The "application/vnd.3gpp.replication+xml" MIME body of the SIP REFER request shall be supported at the roaming II-NNI.

19 Roaming Architecture for Voice over IMS with Local Breakout

Based on inter-operator agreement, the roaming architecture for voice over IMS with local breakout procedure may be supported over the II-NNI.

If the roaming architecture for voice over IMS with local breakout procedure is supported, the procedures in 3GPP TS 24.229 [5] shall be applied and the capabilities below shall be provided at the II-NNI.

The "+g.3gpp.trf" header field parameter (defined in 3GPP TS 24.229 [5] clause 7.9A.3) with a TRF address included in a Feature-Caps header field as described in IETF RFC 6809 [143] in the INVITE request or in the UPDATE request and in the 2xx response to the UPDATE request shall be supported at the roaming II-NNI.

The "+g.3gpp.loopback" header field parameter (defined in 3GPP TS 24.229 [5] clause 7.9A.4) with the identity of the caller's home network included in the Feature-Caps header field as described in IETF RFC 6809 [143] in the INVITE request or in the UPDATE request and in the 2xx response to the UPDATE request shall be supported for the loopback traversal scenario.

The "loopback-indication" header field parameter (defined in 3GPP TS 24.229 [5] subclause 7.2A.5) included the P-Charging-Vector header field in 18x and 2xx responses to the INVITE request, in subsequent requests and in responses to subsequent requests shall be supported for the loopback traversal scenario and at the roaming II-NNI.

The procedures in clause 17 shall be supported at the II-NNI.

20 Delivery of Media Resource Broker address information

Based on inter-operator agreement, the procedure to deliver MRB address information may be supported over the roaming II-NNI.

NOTE: Subsequent interaction between home network MRB and visited network MRB is outside the scope of this document.

If the procedure to enable optimised allocation of media resources is supported, the procedures in 3GPP TS 24.229 [5] shall be applied and the capabilities below shall be provided at the roaming II-NNI.

The "g.3gpp.mrb" feature-capability indicator (defined in 3GPP TS 24.229 [5] clause 7.9A.6) with the MRB address included in the Feature-Caps header field as described in IETF RFC 6809 [143] in the INVITE request or in the UPDATE request and in the 2xx response to the UPDATE request shall be supported at the roaming II-NNI.

21 Overload control

21.1 General

Based on inter-operator agreement, overload control may be supported over the II-NNI.

The overload control defines two optional mechanisms:

- a feedback based mechanism;
- and a load filter mechanism.

The support of either one of the mechanism is based on operator agreements.

If a mechanism is supported, the related procedures from the 3GPP TS 24.229 [5] shall be applied with the requirements in the relevant clause below.

Based on regional/national requirements and inter-operator agreement, Multimedia Priority Service (MPS), as specified in 3GPP TS 22.153 [187], shall be exempted from SIP overload controls across II-NNI up to the point where further exemption would cause network instability.

21.2 Feedback based mechanism

The procedures in 3GPP TS 24.229 [5] shall be applied and the capabilities below shall be provided at the II-NNI.

The feedback based mechanism, defined in IETF RFC 7339 [165], requires no additional support at the II-NNI as it is supported using header field parameters within existing header fields supported at the II-NNI.

NOTE: An algorithm will need to be selected. The IETF RFC 7339 [165] also defines the default algorithm for usage of the feedback based mechanism in the IM CN subsystem. Additional algorithms are either already defined, e.g. the rate-based scheme defined in IETF RFC 7415 [166], or can also be defined in the future.

21.3 The load filter mechanism

The procedures in 3GPP TS 24.229 [5] shall be applied and the capabilities below shall be provided at the II-NNI.

A SUBSCRIBE request containing the Event header field "load-control" and, optionally, an Accept header field containing the "application/load-control+xml" MIME type as defined in IETF RFC 7200 [167] shall be supported on the II-NNI.

NOTE: The addresses to targets that can be supervised need to form part of the service level agreement.

A NOTIFY request containing the "application/load-control+xml" MIME body defined in IETF RFC 7200 [167] shall be supported on the II-NNI.

22 Delivery of original destination identity

Based on inter-operator agreement, the procedure to deliver original identity may be supported over the II-NNI.

NOTE: Service requirement related to the procedure is available in 3GPP TS 22.228 [9].

If the procedure to enable delivery of original destination identity is supported, the procedures in 3GPP TS 24.229 [5] shall be supported as further specified below.

The "mp" header field parameter in the History-Info header field of the initial INVITE request, as defined in IETF RFC 7044 [25], shall be supported over the II-NNI.

23 Telepresence using IMS

Based on inter-operator agreement, the procedure to support telepresence using IMS may be supported over the II-NNI.

NOTE: Service requirement related to the procedure is available in clause 7.10.2.2 of 3GPP TS 22.228 [9].

If the telepresence using IMS is supported, the procedures in 3GPP TS 24.103 [189] shall be applied and the capabilities below shall be provided at the II-NNI.

The "+sip.clue" header field parameter included in a Contact header field as described in 3GPP TS 24.103 [189] in the INVITE request or in the UPDATE request and in the 2xx response to the UPDATE request shall be supported at the II-NNI.

24 Barring of premium rate numbers

Based on inter-operator agreement, barring of premium rate numbers as described in 3GPP TS 24.315 [191] may be supported over the II-NNI.

If barring of premium rate numbers is supported, the "premium-rate" tel URI parameter defined in 3GPP TS 24.229 [5] clause 7.2A.17 shall be supported at the roaming II-NNI.

25 P-CSCF restoration

25.1 General

Based on inter-operator agreement, P-CSCF restoration may be supported over the II-NNI.

The P-CSCF restoration defines two optional mechanisms:

- a PCRF based mechanism; and
- an HSS based mechanism.

The support of either one of the mechanisms is based on operator agreements.

If a mechanism is supported, the related procedures from the 3GPP TS 24.229 [5] shall be applied with the requirements in the relevant clause below.

25.2 PCRF based P-CSCF restoration

The procedures in 3GPP TS 24.229 [5] shall be applied and the capabilities below shall be provided at the II-NNI.

The Restoration-Info header field containing IMSI information defined in 3GPP TS 24.229 [5] in the home-to-visited initial INVITE request shall be supported on the roaming II-NNI.

25.3 HSS based P-CSCF restoration

The procedures in 3GPP TS 24.229 [5] shall be applied and the capabilities below shall be provided at the II-NNI.

The Restoration-Info header field containing information about failed node defined in 3GPP TS 24.229 [5] in the 408 (Request Timeout) response to the home-to-visited initial INVITE request and in the 504 (Server Time-out) response to the MESSAGE request, NOTIFY request, OPTIONS request, PUBLISH request, REFER request and the SUBSCRIBE request shall be supported on the roaming II-NNI.

Annex A (informative): Summary of SIP header fields

A summary of the SIP header fields to be used in case of interconnection by using II-NNI is proposed in table A.1.

The starting point is the sending behaviour described for proxy and UA roles in annex A of 3GPP TS 24.229 [5]:

- In case of misalignment between table A.1 and the behaviour described in 3GPP TS 24.229 [5], the behaviour in 3GPP TS 24.229 [5] has the precedence.
- In case a header field is not described in table A.1 and it is described in 3GPP TS 24.229 [5], the description in 3GPP TS 24.229 [5] is applicable over II-NNI.
- If a header field is not described in 3GPP TS 24.229 [5], the description in table A.1 is applicable over II-NNI.

The definition of the notation codes used in table A.1 is provided in table A.2.

Table A.1: Supported header fields

Item	Header field	Ref.	II-NNI
1	Accept	[5]	m
2	Accept-Contact	[5]	m
3	Accept-Encoding	[5]	m
4	Accept-Language	[5]	m
4a	Accept-Resource-Priority	[5]	0
5	Alert-Info	[5]	0
6	Allow	[5]	m
7	Allow-Events	[5]	m on roaming II-NNI, else o
8	Authentication-Info	[5]	m on roaming II-NNI, else n/a
9	Authorization	[5]	m on roaming II-NNI, else n/a
9a	Answer-Mode	[5]	0
10	Call-ID	[5]	m
11	Call-Info	[5]	m
12	Contact	[5]	m
13	Content-Disposition	[5]	m
14	Content-Encoding	[5]	m
15	Content-Language	[5]	m
16	Content-Length	[5]	m
17	Content-Type	[5]	m
18	CSeq	[5]	m
19	Date	[5]	m
20	Error-Info	[5]	0
21	Expires	[5]	m
21a	Flow-Timer	[5]	m on roaming II-NNI, else o
21b	Feature-Caps	[5]	0
22	Event	[5]	m
23	From	[5]	m
24	Geolocation	[5]	m
24a	Geolocation-Error	[5]	m
24b	Geolocation-Routing	[5]	m
25	History-Info	clause 6.1.1.3.1 (table 6.2, item 4)	0
25a	Info-Package	[5]	0
26	In-Reply-To	[5]	0
27	Join	[5]	0
27a	Max-Breadth	[5]	m
28	Max-Forwards	[5]	m
29	Min-Expires	[5]	m
30	MIME-Version	[5]	m
31	Min-SE	[5]	m
32	Organization	[5]	m
33	P-Access-Network-Info	clause 6.1.1.3.1 (table 6.2, item 2)	m in case of a trust relationship between the interconnected networks, else n/a

Item	Header field	Ref.	II-NNI
33a	P-Answer-state	[5]	0
34	P-Asserted-Identity	clause 6.1.1.3.1 (table 6.2, item 1)	m in case of a trust relationship between the interconnected networks, else n/a
35	P-Asserted-Service	clause 6.1.1.3.1 (table 6.2, item 5)	0

Item	Header field	Ref.	II-NNI
35a	P-Associated-URI	[5]	m on roaming II-NNI, else n/a
36	P-Called-Party-ID	[5]	m on roaming II-NNI, else n/a
37	P-Charging-Function- Addresses	clause 6.1.1.3.1 (table 6.2, item 7)	n/a
38	P-Charging-Vector	clause 6.1.1.3.1 (table 6.2, item 6)	m on roaming II-NNI, else o
39	P-Early-Media	clause 6.1.1.3.1 (table 6.2, item 12)	m in case of a trust relationship between the interconnected networks, else n/a
40	P-Media-Authorization	[5]	n/a
41	P-Preferred-Identity	[5]	n/a
42	P-Preferred-Service	[5]	m on roaming II-NNI, else n/a
43	P-Private-Network-Indication	clause 6.1.1.3.1 (table 6.2, item 9)	m on roaming II-NNI, else o
44	P-Profile-Key	clause 6.1.1.3.1 (table 6.2, item 8)	o on roaming II-NNI, else n/a
44a	P-Refused-URI-List	[5]	o on non-roaming II-NNI and for the loopback traversal scenario else n/a
45	P-Served-User	clause 6.1.1.3.1 (table 6.2, item 10)	m on roaming II-NNI, else n/a
46	P-User-Database	[5]	n/a
47	P-Visited-Network-ID	[5]	m on roaming II-NNI, else n/a
47a	Path	[5]	m on roaming II-NNI, else n/a
47b	Permission-Missing	[5]	0
47c	Policy-Contact	[133] and clause 15.6.2	0
48	Priority	[5]	0
48a	Priv-Answer-Mode	[5]	0
49	Privacy	[5]	m
50	Proxy-Authenticate	[5]	m on roaming II-NNI, else n/a
51	Proxy-Authorization	[5]	m on roaming II-NNI, else n/a
52	Proxy-Require	[5]	m
52a	RAck	[5]	m
53	Reason	[5] and clause 6.1.1.3.1 (table 6.2, item 11)	o when in a request. When in a response, m in case of a trust relationship between the interconnected networks, else n/a
54	Record-Route	[5]	m
54a	Recv-Info	[5]	0
55	Referred-By	[5]	m
55a	Refer-Sub	[5]	m in the case the REFER request is supported, else n/a
55b	Refer-To	[5]	m in the case the REFER request is supported, else n/a
56	Reject-Contact	[5]	m
56a	Relayed-Charge	clause 6.1.1.3.1 (table 6.2, item 19)	n/a
57	Replaces	[5]	0
58	Reply-To	[5]	0
59	Request-Disposition	[5]	m
60	Require	[5]	m
61	Resource-Priority	clause 6.1.1.3.1 (table 6.2, item 3)	0
61b	Restoration-Info	clause 6.1.1.3.1 (table 6.2, item 18)	o on roaming II-NNI, else n/a
61a	Retry-After	[5]	0
62	Route	[5]	m
62a	RSeq	[5]	m
63	Security-Client	[5]	n/a
63a	Security-Server	[5]	n/a
64	Security-Verify	[5]	n/a
65	Server	[5]	0
65a	Service-Route	[5]	m on roaming II-NNI, else n/a
65b	Session-ID	[5]	0
66	Session-Expires	[5]	m

Item	Header field	Ref.	II-NNI
66a	SIP-ETag	[5]	m in the case the PUBLISH request is supported, else n/a
66b	SIP-If-Match	[5]	m in the case the PUBLISH request is supported, else n/a
67	Subject	[5]	0
67a	Subscription-State	[5]	m in the case the NOTIFY request is supported, else n/a
67b	Suppress-If-Match	[144] and clause 15.6.4	0
68	Supported	[5]	m
68a	Target-Dialog	[5]	0
69	Timestamp	[5]	m
70	То	[5]	m
71	Trigger-Consent	[5]	m
71a	Unsupported	[5]	m
72	User-Agent	[5]	m
73	User-to-User	[5]	0
74	Via	[5]	m
75	Warning	[5]	0
76	WWW-Authenticate	[5]	m on roaming II-NNI, else n/a

Table A.2: Key to notation codes for SIP header fields

Notation code	Meaning
m	The SIP header field is applicable at II-NNI. Supporting a SIP header field at the II-NNI means that this header field is passed through the IBCF. It does not imply that network elements inside the serving and served networks or user equipment connected to these networks shall support this header field, where TS 24.229 [5] is applied. If specified in TS 24.229 [5], the IBCF modifies the SIP header field.
0	The applicability of SIP header field at II-NNI depends on bilateral agreement between the operators.
n/a	It is impossible to use the SIP header field at the II-NNI. This header field could be discarded by the IBCF.

Annex B (informative): Dynamic view of SIP header fields within SIP messages

B.1 Scope

This annex provides the applicability of SIP header fields in SIP messages over II-NNI by using the methodology of a so-called "dynamic view", as used in IETF RFC 3261 [13] and other SIP related RFCs. This methodology documents the presence of SIP header fields in SIP messages over the II-NNI and also takes into account dynamic conditions, for instance the presence of a SIP header field in a SIP request message as condition for the SIP header field in the corresponding SIP response message.

Specific information about the applicability of SIP header fields in SIP messages in a dynamic view is also provided for cases where an MMTEL supplementary service is supported over the II-NNI between operators.

The applicability of SIP header fields described in this annex is based on the procedures described in 3GPP TS 24.229 [5] and the list of SIP header fields in annex A of 3GPP TS 24.229 [5].

B.2 Methodology

The meaning of the notation codes used in the tables in subsequent clauses is as follows:

In the "RFC status" column, the notation codes defined in IETF RFC 3261 [13] clause 20 are applied.

In the "II-NNI condition" column the notation codes defined in table B.2.1 are used. If a capability of a SIP header field is specified as either optional or conditional in table 6.1.3.1, then "II-NNI condition" of the SIP header field is described with conditional expression.

In each request-related table, the order of SIP header fields inherits that of clause A.2.2 of 3GPP TS 24.229 [5].

In each response-related table, the SIP status code for which the header field is applicable is described in the "SIP status code" column. The notation codes for the "where" column as defined in IETF RFC 3261 [13] clause 20 are applied. The notation code "r" in "SIP status code" column corresponds to any SIP status code which is described in annex A of 3GPP TS 24.229 [5] for the corresponding method. Any SIP header field not listed in a table is not applicable for the corresponding SIP message.

Table B.2.1: Key to notation codes for SIP header fields in dynamic view for II-NNI

Notation code (NOTE 1)	Meaning					
dc	The SIP header field is required to be present in a SIP message over II-NNI according to the procedures specified in other specifications e.g. TS 24.229 [5].					
dm	The SIP header field shall be always present in a SIP message over II-NNI, and if received, it must be handled according to TS 24.229 [5].					
dm*	The SIP header field should be present in a SIP message over II-NNI, but the IMS network need to be prepared to receive a SIP message without that header field.					
do	The SIP header field can be present in a SIP message over II-NNI, and if received, it must be handled according to TS 24.229 [5]. (NOTE 2)					
dt	The header field should be present in a SIP message over II-NNI, but the IMS network need to be prepared to receive a SIP message without that header field. If TCP is used as a transport, then the header field must be present in a SIP message.					
d*	The SIP header field is required to be present in a SIP message if the message body is not empty.					
dn/a	The SIP header field is shall not be present in a SIP message over II-NNI. (NOTE 3)					
dc <integer></integer>	The condition for the presence of the SIP header field. <integer> is the identifier of the condition. This notation code is applied only in each request-related or response-related table.</integer>					
	aning of the notation codes is same as in IETF RFC 3261 [13] clause 20 and "d" is used to sise the dynamic view.					
fields pr	ied by local policy rules, the IBCF acting as entry point may omit or modify any received SIP header for to forwarding SIP messages as specified in TS 24.229 [5] clause 5.10.6.2.					
	header field can be removed at the IBCF acting as exit point by using screening functionality in TS 24.229 [5] clause 5.10.6.2.					

B.3 ACK method

Table B.3.1: Supported header fields within the ACK request

Item	Header field	Ref.	RFC status	II-NNI condition
1	Accept-Contact	[51]	0	do
2	Allow-Events	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE)
3	Authorization	[13]	0	IF table 6.1.3.1/7 THEN do (NOTE)
4	Call-ID	[13]	m	dm
5	Content-Disposition	[13]	0	do
6	Content-Encoding	[13]	0	do
7	Content-Language	[13]	0	do
8	Content-Length	[13]	t	dt
9	Content-Type	[13]	*	d*
10	CSeq	[13]	m	dm
11	Date	[13]	0	do
12	From	[13]	m	dm
13	Max-Breadth	[79]	0	do
14	Max-Forwards	[13]	m	dm
15	MIME-Version	[13]	0	do
16	P-Access-Network-Info	[24], [2 4A], [2 4B]	0	IF table 6.1.3.1/36 THEN do (NOTE)
17	Privacy	[34]	0	do
18	P-Charging-Vector	[24], [2 4A]	0	IF table 6.1.3.1/38 THEN do (NOTE)
19	Proxy-Authorization	[13]	0	IF table 6.1.3.1/7 THEN do (NOTE)
20	Proxy-Require	[13]	n/a	dn/a
21	Reason	[48]	0	IF table 6.1.3.1/40 THEN do (NOTE)
22	Recv-Info	[39]	n/a	dn/a
23	Reject-Contact	[51]	0	do
24	Relayed-Charge	[5]	n/a	dn/a
25	Request-Disposition	[51]	0	do
26	Require	[13]	n/a	dn/a
27	Resource-Priority	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE)
28	Route	[13]	С	dc
29	Session-ID	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)
30	Timestamp	[13]	0	do
31	То	[13]	m	dm
32	User-Agent	[13]	0	do
33	Via	[13]	m	dm

NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in 3GPP TS 24.229 [5] clause 5.10.6.2.

B.4 BYE method

Table B.4.1: Supported header fields within the BYE request

	Item	Header field	Ref.	RFC status	II-NNI condition			
Accept-Encoding	1	Accept	[13]	0	IF dc1 (AOC: clause 12.22) THEN dm ELSE do			
Accept-Encoding	2	Accept-Contact	[51]	0	do			
Accept-Language	3			0	do			
Allow 13				0	do			
Authorization	5		[13]	0	do			
Authorization	6	Allow-Events	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE)			
Call-ID	7			0				
Content-Disposition	8			m				
10					IF dc2 (AOC: clause 12.22) THEN dm ELSE do			
11				0	,			
12				0	do			
13				t				
14								
15				m				
From								
Geolocation								
18								
19								
Max-Forwards								
MIME-Version				_				
P-Ascess-Network-Info								
AB								
P-Asserted-Identity	22	P-Access-Network-Inio		0	IF table 6.1.3.1/36 THEN GO (NOTE)			
24	22	D Asserted Identity			IE toblo 6.1.2.1/27 THEN do (NOTE)			
Addresses								
25	24		[24]	0	un/a			
26	25		[0.4]		do/o			
27 Privacy [34] o do 28 Proxy-Authorization [13] o IF table 6.1.3.1/7 THEN do (NOTE) 29 Proxy-Require [13] o do 30 Reason [48] o IF dc3 (ICB: clause 12.10.1) THEN dm ELSE table 6.1.3.1/40 THEN do (NOTE) 31 Record-Route [13] o do 32 Referred-By [53] o do 33 Reject-Contact [51] o do 34 Relayed-Charge [5] n/a dn/a 35 Request-Disposition [51] o do 36 Require [13] c dc 37 Resource-Priority [78] o IF table 6.1.3.1/73 THEN do (NOTE) 38 Route [13] c dc 39 Security-Client [47] o dn/a 40 Session-ID [124] m IF table 6.1.3.1/94 THEN dm (NOTE) 42 Supported<				_				
28 Proxy-Authorization [13] o IF table 6.1.3.1/7 THEN do (NOTE) 29 Proxy-Require [13] o do 30 Reason [48] o IF dc3 (ICB: clause 12.10.1) THEN dm ELSE table 6.1.3.1/40 THEN do (NOTE) 31 Record-Route [13] o do 32 Referred-By [53] o do 33 Reject-Contact [51] o do 34 Relayed-Charge [5] n/a dn/a 35 Request-Disposition [51] o do 36 Require [13] c dc 37 Resource-Priority [78] o IF table 6.1.3.1/73 THEN do (NOTE) 38 Route [13] c dc 39 Security-Client [47] o dn/a 40 Security-Verify [47] o dn/a 41 Session-ID [124] m IF table 6.1.3.1/94 THEN dm (NOTE) 42								
29 Proxy-Require [13] o do 30 Reason [48] o IF dc3 (ICB: clause 12.10.1) THEN dm ELSE table 6.1.3.1/40 THEN do (NOTE) 31 Record-Route [13] o do 32 Referred-By [53] o do 33 Reject-Contact [51] o do 34 Relayed-Charge [5] n/a dn/a 35 Request-Disposition [51] o do 36 Require [13] c dc 37 Resource-Priority [78] o IF table 6.1.3.1/73 THEN do (NOTE) 38 Route [13] c dc 39 Security-Client [47] o dn/a 40 Security-Verify [47] o dn/a 41 Session-ID [124] m IF table 6.1.3.1/94 THEN dm (NOTE) 42 Supported [13] o do 43 Timestamp [13]								
Reason								
table 6.1.3.1/40 THEN do (NOTE)								
31 Record-Route [13] 0 do 32 Referred-By [53] 0 do 33 Reject-Contact [51] 0 do 34 Relayed-Charge [5] n/a dn/a 35 Require [13] c dc 36 Require [13] c dc 37 Resource-Priority [78] o IF table 6.1.3.1/73 THEN do (NOTE) 38 Route [13] c dc 39 Security-Client [47] o dn/a 40 Security-Verify [47] o dn/a 41 Session-ID [124] m IF table 6.1.3.1/94 THEN dm (NOTE) 42 Supported [13] o do 43 Timestamp [13] o do 44 To [13] o do 45 User-Agent [13] o do 46 User	30	Reason	[48]	0				
32 Referred-By [53] 0 do 33 Reject-Contact [51] 0 do 34 Relayed-Charge [5] n/a dn/a 35 Request-Disposition [51] 0 do 36 Require [13] c dc 37 Resource-Priority [78] 0 IF table 6.1.3.1/73 THEN do (NOTE) 38 Route [13] c dc 39 Security-Client [47] o dn/a 40 Session-ID [124] m IF table 6.1.3.1/94 THEN dm (NOTE) 42 Supported [13] o do 43 Timestamp [13] o do 44 To [13] o do 45 User-Agent [13] o do 46 User-to-User [83] o IF table 6.1.3.1/79 THEN do (NOTE) 47 Via [13] m dm	04	December 1	[40]	_				
33 Reject-Contact [51] 0 do 34 Relayed-Charge [5] n/a dn/a 35 Request-Disposition [51] 0 do 36 Require [13] c dc 37 Resource-Priority [78] 0 IF table 6.1.3.1/73 THEN do (NOTE) 38 Route [13] c dc 39 Security-Client [47] o dn/a 40 Security-Verify [47] o dn/a 41 Session-ID [124] m IF table 6.1.3.1/94 THEN dm (NOTE) 42 Supported [13] o do 43 Timestamp [13] o do 44 To [13] m dm 45 User-Agent [13] o do 46 User-to-User [83] o IF table 6.1.3.1/79 THEN do (NOTE) 47 Via [13] m dm								
Relayed-Charge [5] n/a dn/a Request-Disposition [51] 0 do Require [13] c dc Resource-Priority [78] 0 IF table 6.1.3.1/73 THEN do (NOTE) Resource-Priority [78] 0 dr/a Resource-Priority [47] 0 dr/a Security-Client [47] 0 dr/a Security-Verify [47] 0 dr/a Session-ID [124] m IF table 6.1.3.1/94 THEN dm (NOTE) Supported [13] 0 do Timestamp [13] 0 do Image: Agent [13] m dm Suser-Agent [14] m lift table 6.1.3.1/79 THEN do (NOTE) Suser-Agent [14] m lift table 6.1.3.1/79 THEN do (NOTE) Suser-Agent [15] m dm Suser-Agen								
Request-Disposition [51] O do								
36Require[13]cdc37Resource-Priority[78]oIF table 6.1.3.1/73 THEN do (NOTE)38Route[13]cdc39Security-Client[47]odn/a40Security-Verify[47]odn/a41Session-ID[124]mIF table 6.1.3.1/94 THEN dm (NOTE)42Supported[13]odo43Timestamp[13]odo44To[13]mdm45User-Agent[13]odo46User-to-User[83]oIF table 6.1.3.1/79 THEN do (NOTE)47Via[13]mdmdc1:request invoked due to AOC AND visited-to-home request on roaming II-NNIdc2:request invoked due to AOC AND home-to-visited request on roaming II-NNIdc3:request invoked due to "dynamic ICB" on a confirmed statusNOTE:If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving networ can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message								
Resource-Priority [78] 0 IF table 6.1.3.1/73 THEN do (NOTE) Resource-Priority [13] c dc Security-Client [47] 0 dn/a Security-Verify [47] 0 dn/a IF table 6.1.3.1/94 THEN dm (NOTE) Session-ID [124] m IF table 6.1.3.1/94 THEN dm (NOTE) Supported [13] 0 do Timestamp [13] 0 do IF table 6.1.3.1/94 THEN dm (NOTE) Supported [13] 0 do IF table 6.1.3.1/94 THEN dm (NOTE) IF table 6.1.3.1/79 THEN do (NOTE) IF table 6.1.3.1/94 THEN do (NOTE)								
Route [13] C dc 39								
Security-Client [47] O dn/a								
40 Security-Verify [47] o dn/a 41 Session-ID [124] m IF table 6.1.3.1/94 THEN dm (NOTE) 42 Supported [13] o do 43 Timestamp [13] o do 44 To [13] m dm 45 User-Agent [13] o do 46 User-to-User [83] o IF table 6.1.3.1/79 THEN do (NOTE) 47 Via [13] m dm 46: request invoked due to AOC AND visited-to-home request on roaming II-NNI 47 request invoked due to AOC AND home-to-visited request on roaming II-NNI 48 request invoked due to "dynamic ICB" on a confirmed status NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message				С				
41 Session-ID [124] m IF table 6.1.3.1/94 THEN dm (NOTE) 42 Supported [13] o do 43 Timestamp [13] o do 44 To [13] m dm 45 User-Agent [13] o do 46 User-to-User [83] o IF table 6.1.3.1/79 THEN do (NOTE) 47 Via [13] m dm 46: request invoked due to AOC AND visited-to-home request on roaming II-NNI 47 request invoked due to AOC AND home-to-visited request on roaming II-NNI 48 request invoked due to AOC AND home-to-visited request on roaming II-NNI 49 The North Research Re								
42 Supported [13] o do 43 Timestamp [13] o do 44 To [13] m dm 45 User-Agent [13] o do 46 User-to-User [83] o IF table 6.1.3.1/79 THEN do (NOTE) 47 Via [13] m dm 46: request invoked due to AOC AND visited-to-home request on roaming II-NNI 48 request invoked due to AOC AND home-to-visited request on roaming II-NNI 49 request invoked due to AOC AND home-to-visited request on roaming II-NNI 40 request invoked due to "dynamic ICB" on a confirmed status 40 NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message				0				
Timestamp [13] o do 44 To [13] m dm 45 User-Agent [13] o do 46 User-to-User [83] o IF table 6.1.3.1/79 THEN do (NOTE) 47 Via [13] m dm dc1: request invoked due to AOC AND visited-to-home request on roaming II-NNI request invoked due to AOC AND home-to-visited request on roaming II-NNI request invoked due to "dynamic ICB" on a confirmed status NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message					, , ,			
44 To [13] m dm 45 User-Agent [13] o do 46 User-to-User [83] o IF table 6.1.3.1/79 THEN do (NOTE) 47 Via [13] m dm dc1: request invoked due to AOC AND visited-to-home request on roaming II-NNI dc2: request invoked due to AOC AND home-to-visited request on roaming II-NNI dc3: request invoked due to "dynamic ICB" on a confirmed status NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving networ can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message								
45 User-Agent [13] o do 46 User-to-User [83] o IF table 6.1.3.1/79 THEN do (NOTE) 47 Via [13] m dm dc1: request invoked due to AOC AND visited-to-home request on roaming II-NNI dc2: request invoked due to AOC AND home-to-visited request on roaming II-NNI dc3: request invoked due to "dynamic ICB" on a confirmed status NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving networ can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message				0				
46 User-to-User [83] o IF table 6.1.3.1/79 THEN do (NOTE) 47 Via [13] m dm dc1: request invoked due to AOC AND visited-to-home request on roaming II-NNI dc2: request invoked due to AOC AND home-to-visited request on roaming II-NNI dc3: request invoked due to "dynamic ICB" on a confirmed status NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving networ can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message				m	dm			
47 Via [13] m dm dc1: request invoked due to AOC AND visited-to-home request on roaming II-NNI dc2: request invoked due to AOC AND home-to-visited request on roaming II-NNI dc3: request invoked due to "dynamic ICB" on a confirmed status NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving networ can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message				0				
dc1: request invoked due to AOC AND visited-to-home request on roaming II-NNI dc2: request invoked due to AOC AND home-to-visited request on roaming II-NNI dc3: request invoked due to "dynamic ICB" on a confirmed status NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving networ can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message		User-to-User	[83]	0	IF table 6.1.3.1/79 THEN do (NOTE)			
dc2: request invoked due to AOC AND home-to-visited request on roaming II-NNI request invoked due to "dynamic ICB" on a confirmed status NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving networ can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message								
dc2: request invoked due to AOC AND home-to-visited request on roaming II-NNI request invoked due to "dynamic ICB" on a confirmed status NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving networ can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message								
NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving networ can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message		request invoked due to AOC A	ND home-	to-visited reques	t on roaming II-NNI			
can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message								
	NOTE:							
as specified in TS 24.229 [5] clause 5.10.6.2.					IP message prior to forwarding the SIP message			
-land and a state of the state		as specified in TS 24.229 [5] cl	ause 5.10	.6.2.				

Table B.4.2: Supported header fields within the BYE response

8 Call-ID 100 others [13] m dm 9 Contact 3xx 485 [13] o do	Item	Header field	SIP	Ref.	RFC status	II-NNI condition
Accept-Encoding						
Accept-Language				[13]	С	dc
Accept-Resource-Priority	2				С	
Allow					С	
Security-Server Security-S			417		0	
Allow-Events	5	Allow		[13]		
Security-Server Security-S	6	Allow-Events		[20]		IF table 6.1.3.1/23 THEN do
Security-Server Content					0	IF table 6.1.3.1/7 THEN do (NOTE 2)
Mass	8		others		m	dm
Content-Encoding	9	Contact		[13]	0	do
13	10	Content-Disposition	r	[13]	0	IF dc1 (AOC: clause 12.22) THEN dm ELSE do
13	11	Content-Encoding	r	[13]	0	do
13			r		0	do
15 CSeq 100 others 13	13				t	dt
15	14	Content-Type	r	[13]	*	d*
17					m	dm
18					0	
19	17	Error-Info	3xx-6xx	[13]	0	
Others O			others		m	
MIME-version	19	Geolocation-Error		[68]	-	
P-Access-Network-Info						
22	20					***
P-Asserted-Identity	21	P-Access-Network-Info	r	4A], [2	0	
Addresses	22	P-Asserted-Identity	r	[44]	0	
24 P-Charging-Vector r [24], [2 4A] o dn/a 25 P-Preferred-Identity r [44] o dn/a 26 Privacy r [34] o do 27 Proxy-Authenticate 401 (NOTE 1) [13] o do 28 Record-Route 2xx [13] o do 29 Relayed-Charge r [5] n/a dn/a 30 Require r [13] c dc 31 Retry-After 404 (13) (13) (48) (48) (48) (48) (48) (48) (48) (48	23		r		0	
P-Preferred-Identity	24		r	[24], [2	0	dn/a
Privacy	25	P-Preferred-Identity	r		0	dn/a
Proxy-Authenticate	26	Privacy	r		0	do
NOTE 1	27	Proxy-Authenticate	(NOTE 1)	[13]	0	
29 Relayed-Charge r [5] n/a dn/a 30 Require r [13] c dc 31 Retry-After 404			(NOTE 1)		m	
Reduire r [13] c dc dc 31 Retry-After 404 413 480 486 500 503 600 603 32 Security-Server 421 494 [47] 0 dn/a dc dc dc dc dc dc dc d			2xx			
31 Retry-After 404 413 480 486 500 503 600 603 32 Security-Server 421 494 [47] 0 do			_			
32 Security-Server 421 494 [47] o dn/a						
494			413 480 486 500 503 600 603	[13]	0	
33 Server r [13] o do	32	Security-Server	421	[47]	0	dn/a
	33	Server	r	[13]	0	do

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
34	Session-ID	r	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE 2)
35	Supported	2xx	[13]	0	do
36	Timestamp	r	[13]	0	do
37	То	100 others	[13]	m	dm
38	Unsupported	420	[13]	m	dm
39	User-Agent	r	[13]	0	do
40	User-to-User	r	[83]	0	IF table 6.1.3.1/79 THEN do (NOTE 2)
41	Via	100 others	[13]	m	dm
42	Warning	r	[13]	0	do
43	WWW-Authenticate	401 (NOTE 1)	[13]	m	dm
		407 (NOTE 1)		0	do

200 (OK) response invoked due to AOC AND home-to-visited response on roaming II-NNI

NOTE 1: The SIP status code is only applicable over the roaming II-NNI.

NOTE 2: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.

B.5 **CANCEL** method

Table B.5.1: Supported header fields within the CANCEL request

Item	Header field	Ref.	RFC status	II-NNI condition				
1	Accept-Contact	[51]	0	do				
2	Authorization	[13]	0	IF table 6.1.3.1/7 THEN do (NOTE)				
3	Call-ID	[13]	m	dm				
4	Content-Length	[13]	t	dt				
5	CSeq	[13]	m	dm				
6	Date	[13]	0	do				
7	From	[13]	m	dm				
8	Max-Breadth	[79]	0	do				
9	Max-Forwards	[13]	m	dm				
10	Privacy	[34]	0	do				
11	Reason	[48]	0	IF dc1 (CW: clause 12.7) THEN dm ELSE IF				
				table 6.1.3.1/40 THEN do (NOTE)				
12	Record-Route	[13]	0	do				
13	Reject-Contact	[51]	0	do				
14	Request-Disposition	[51]	0	do				
15	Resource-Priority	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE)				
16	Route	[13]	С	dc				
17	Session-ID	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)				
18	Supported	[13]	0	do				
19	Timestamp	[13]	0	do				
20	То	[13]	m	dm				
21	User-Agent	[13]	0	do				
22	Via	[13]	m	dm				
dc1:	request invoked due to CW at the expiry of the "CW timer"							

NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.

Table B.5.2: Supported header fields within the CANCEL response

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition				
1	Accept-Resource-Priority	2xx 417	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE)				
2	Call-ID	r	[13]	m	dm				
3	Content-Length	r	[13]	t	dt				
4	CSeq	r	[13]	m	dm				
5	Date	r	[13]	0	do				
6	Error-Info	3xx-6xx	[13]	0	IF table 6.1.3.1/13 THEN do (NOTE)				
7	From	r	[13]	m	dm				
8	Privacy	r	[34]	0	do				
9	Record-Route	2xx	[13]	0	do				
10	Retry-After	404 413 480 486 500 503 600 603	[13]	0	do				
11	Session-ID	r	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)				
12	Supported	2xx	[13]	0	do				
13	Timestamp	r	[13]	0	do				
14	То	r	[13]	m	dm				
15	User-Agent	r	[13]	0	do				
16	Via	r	[13]	m	dm				
	17 Warning r [13] o do								
NOTE:	NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.								

B.6 INFO method

As described in table 6.1, the support of INFO method over the II-NNI is based on bilateral agreement between the operators.

Table B.6.1: Supported header fields within the INFO request

Item	n Header field Ref. RFC status II-NNI condition							
1	Accept	[13], [39]	0	do				
2	Accept-Encoding	[13], [39]	0	do				
3	Accept-Language	[13], [39]	0	do				
4	Allow	[13], [39]	0	do				
5	Allow-Events	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE)				
6	Authorization	[13], [39]	0	IF table 6.1.3.1/7 THEN do (NOTE)				
7	Call-ID	[13], [39]	m	dm				
8	Call-Info	[13], [39]	0	do				
9	Content-Disposition	[13], [39]	0	IF dc1 (AOC: clause 12.22) THEN dm ELSE do				
10	Content-Encoding	[13], [39]	0	do				
11	Content-Language	[13], [39]	0	do				
12	Content-Length	[13], [39]	0	do				
13	Content-Type	[13], [39]	*	d*				
14	CSeq	[13], [39]	m	dm				
15	Date	[13], [39]	0	do				
16	From	[13], [39]	m	dm				
17	Geolocation	[68]	0	do				
18	Geolocation-Routing	[68]	0	do				
19	Info-Package	[39]	m*	IF table 6.1.3.1/17 THEN do (NOTE)				
20	Max-Breadth	[79], [39]	n/a	dn/a				
21	Max-Forwards	[13], [39]	0	do				
22	MIME-Version	[13], [39]	0	do				
23	P-Access-Network-Info	[24], [24	0	IF table 6.1.3.1/36 THEN do (NOTE)				
		B]						
24	P-Charging-Function- Addresses	[24]	0	dn/a				
25	P-Charging-Vector	[24]	0	IF table 6.1.3.1/38 THEN do (NOTE)				
26	Privacy	[34], [39]	0	do				
27	Proxy-Authorization	[13], [39]	0	IF table 6.1.3.1/7 THEN do (NOTE)				
28	Proxy-Require	[13], [39]	0	do				
29	Reason	[48], [39]	0	IF table 6.1.3.1/40 THEN do (NOTE)				
30	Record-Route	[13], [39]	0	do				
31	Referred-By	[53], [39]	0	do				
32	Relayed-Charge	[5]	n/a	dn/a				
33	Request-Disposition	[51], [39]	0	do				
34	Require	[13], [39]	0	do				
35	Resource-Priority	[78], [39]	0	IF table 6.1.3.1/73 THEN do (NOTE)				
36	Route	[13], [39]	0	do				
37	Security-Client	[47], [39]	0	dn/a				
38	Security-Verify	[47], [39]	0	dn/a				
39	Session-ID	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)				
40	Subject	[13], [39]	0	do				
41	Supported	[13], [39]	0	do				
42	Timestamp	[13], [39]	0	do				
43	То	[13], [39]	m	dm				
44	User-Agent	[13], [39]	0	do				
45	Via	[13], [39]	m	dm				
dc1:	request invoked due to AOC AN							
NOTE:								

NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.

Table B.6.2: Supported header fields within the INFO response

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
1	Accept	2xx 415	[13], [39]	0	do
2	Accept-Encoding	2xx 415	[13], [39]	0 C	do dc
3	Accept-Language	2xx 415	[13], [39]	0	do
4	Accept-Resource-Priority	2xx 417	[78], [39]	0	IF table 6.1.3.1/73 THEN do (NOTE 2)
5	Allow	405 others	[13], [39]	m o	dm do
6	Allow-Events	2xx	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE 2)
7	Authentication-Info	2xx	[13], [39]	0	IF table 6.1.3.1/7 THEN do (NOTE 2)
8	Call-ID	100 others	[13], [39]	m	dm
9	Call-Info	r	[13], [39]	0	do
10	Content-Disposition	r	[13], [39]	0	do
11	Content-Disposition Content-Encoding	r	[13], [39]	0	do
12	Content-Language	r	[13], [39]	0	do
13	Content-Length	100 others	[13], [39]	0	do
14	Content-Type	r	[13], [39]	*	d*
15	CSeq	100 others	[13], [39]	m	dm
16	Date	100 others	[13], [39]	0	do
17	Error-Info	3xx-6xx	[13], [39]	0	IF table 6.1.3.1/13 THEN do (NOTE 2)
18	From	100 others	[13], [39]	m	dm
19	Geolocation-Error	424 others	[68], [39]	m o	dm do
20	MIME-version	r	[13], [39]	0	do
21	Organization	r	[13], [39]	n/a	dn/a
22	P-Access-Network-Info	r	[24], [24A], [24B]	0	IF table 6.1.3.1/36 THEN do (NOTE 2)
23	P-Charging-Function- Addresses	r	[24], [24A]	0	dn/a
24	P-Charging-Vector	r	[24], [24A]	0	IF table 6.1.3.1/38 THEN do (NOTE 2)
25	Privacy	r	[34], [39]	0	do
26	Proxy-Authenticate	401 (NOTE 1)	[13], [39]	0	do
27	Relayed-Charge	r	[5]	n/a	dn/a
28 29	Require Retry-After	r 404 413 480 486 500 503 600 603	[13], [39] [13], [39]	0	do do
30	Security-Server	421 494	[47], [39]	0	dn/a
31	Server	r	[13], [39]	0	do
32	Session-ID	r	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE 2)
33	Supported	2xx	[13], [39]	0	do
34	Timestamp	r	[13], [39]	0	do
35	То	100 others	[13], [39]	m	dm

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
36	Unsupported	420	[13], [39]	0	do
37	User-Agent	r	[13], [39]	0	do
38	Via	100 others	[13], [39]	m	dm
39	Warning	r	[13], [39]	0	do
40	WWW-Authenticate	401 (NOTE 1)	[13], [39]	m	dm

NOTE 1: The SIP status code is only applicable over the roaming II-NNI.

NOTE 2: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.

B.7 INVITE method

Table B.7.1: Supported header fields within the INVITE request

Item	Header field	Ref.	RFC status	II-NNI condition
1	Accept	[13]	0	IF dc1 (AOC: clause 12.22) THEN dm ELSE do
2	Accept-Contact	[51]	0	IF dc2 (PNM: clause 12.17) THEN dm ELSE do
3	Accept-Encoding	[13]	0	do
4	Accept-Language	[13]	0	do
5	Alert-Info	[13]	0	IF dc3 (CRS: clause 12.15) THEN dm ELSE IF
3	Alert-IIIIO	[13]	0	table 6.1.3.1/10 THEN do (NOTE 3)
6	Allow	[13]	0	do
7			1	
	Allow-Events	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE 3)
8	Answer-Mode	[94]	0	IF table 6.1.3.1/90 THEN do (NOTE 3)
9	Authorization	[13]	0	IF table 6.1.3.1/7 THEN do (NOTE 3)
10	Call-ID	[13]	m	dm
11	Call-Info	[13]	0	IF dc4 (CCBS/CCNR/CCNL:
				clause 12.11/12.12/12.23) OR
				dc5 (announcements: clause 12.21) THEN dm
				ELSE do
12	Contact	[13]	m	dm
13	Content-Disposition	[13]	0	IF dc6 (AOC: clause 12.22) THEN dm ELSE do
14	Content-Encoding	[13]	0	do
15	Content-Language	[13]	0	do
16	Content-Length	[13]	t	dt
17	Content-Type	[13]	*	d*
18	CSeq	[13]	m	dm
19	Date	[13]	0	do
20	Expires	[13]	1	do
			0	
21	Feature-Caps	[143]	0	IF table 6.1.3.1/103 THEN do (NOTE 3)
22	From	[13]	m	dm
23	Geolocation	[68]	0	do
24	Geolocation-Routing	[68]	0	do
25	History-Info	[25]	0	IF dc7 (CDIV: clause 12.6) OR dc2 (PNM:
				clause 12.17) THEN dm ELSE IF
				table 6.1.3.1/50 AND initial request THEN do
				(NOTE 1, NOTE 3)
26	In-Reply-To	[13]	0	do
27	Join	[55]	0	IF table 6.1.3.1/48 THEN do (NOTE 3)
28	Max-Breadth	[79]	0	do
29	Max-Forwards	[13]	m	dm
30	MIME-Version	[13]	0	do
31	Min-SE	[52]	0	do
32	Organization	[13]	0	do
33	P-Access-Network-Info	[24], [2	1	IF table 6.1.3.1/36 THEN do (NOTE 3)
33	F-Access-Network-IIIIO		0	IF table 6.1.3.1/36 THEN GO (NOTE 3)
0.4	D. A ot I. I. I tit.	4B]	_	IF table 0.4.0.4/07 AND initial resource TUEN
34	P-Asserted-Identity	[44]	0	IF table 6.1.3.1/27 AND initial request THEN
				dm (NOTE 2, NOTE 3)
35	P-Asserted-Service	[26]	0	IF (non-roaming II-NNI OR loopback traversal
				scenario OR home-to-visited request on
				roaming II-NNI) AND table 6.1.3.1/77 AND
				initial request THEN do (NOTE 3)
36	P-Called-Party-ID	[24]	0	IF home-to-visited request on roaming II-NNI
<u> </u>			<u> </u>	AND table 6.1.3.1/34 THEN do (NOTE 3)
37	P-Charging-Function-	[24]	0	dn/a
	Addresses	' '		
38	P-Charging-Vector	[24]	0	IF table 6.1.3.1/38 AND initial request THEN
		' ' '		dm (NOTE 3)
39	P-Early-Media	[74]	0	IF table 6.1.3.1/69 THEN do (NOTE 3)
40	P-Media-Authorization	[42]	0	dn/a
41	P-Preferred-Identity			dn/a
		[44]	0	
42	P-Preferred-Service	[26]	0	IF visited-to-home request on roaming II-NNI
				AND table 6.1.3.1/77 AND initial request THEN
				do (NOTE 3)
. 40	P-Private-Network-Indication	[84]	0	IF table 6.1.3.1/80 AND initial request THEN do
43	F-Private-Network-indication	[]		I
				(NOTE 3)
43	P-Profile-Key	[64]	0	(NOTE 3) IF table 6.1.3.1/59 AND initial request THEN do (NOTE 3)

Item	Header field	Ref.	RFC status	II-NNI condition
45	P-Served-User	[85]	0	IF visited-to-home request on roaming II-NNI
		' '		AND initial request being sent from "priviledged
				sender" THEN dm (NOTE 3)
46	P-User-Database	[60]	0	dn/a
47	P-Visited-Network-ID	[24]	0	dn/a
48	Priority	[13]	0	do
49	Privacy	[34]	0	IF dc8 (OIP/OIR: clause 12.3) THEN dm ELSE
		' '		do
50	Priv-Answer-Mode	[94]	0	IF table 6.1.3.1/90 THEN do (NOTE 3)
51	Proxy-Authorization	[13]	0	IF table 6.1.3.1/7 THEN do (NOTE 3)
52	Proxy-Require	[13]	0	do
53	Reason	[48]	0	IF table 6.1.3.1/40 AND subsequent request
				THEN do (NOTE 3)
54	Record-Route	[13]	0	do
55	Recv-Info	[39]	m	IF table 6.1.3.1/17 THEN dm (NOTE 3)
56	Referred-By	[53]	0	IF dc9 (ECT: clause 12.13) OR dc10 (CONF:
				clause 12.19) THEN dm ELSE do
57	Reject-Contact	[51]	0	do
58	Relayed-Charge	[5]	n/a	dn/a
59	Replaces	[54]	0	IF dc11 (ECT: clause 12.13) OR dc12 (CONF:
				clause 12.19) THEN dm ELSE IF
				table 6.1.3.1/47 THEN do (NOTE 3)
60	Reply-To	[13]	0	do
61	Request-Disposition	[51]	0	do
62	Require	[13]	С	IF dc11 (ECT: clause 12.13) THEN dm ELSE
				dc
63	Resource-Priority	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE 3)
64	Restoration-Info	[5]	n/a	IF home-to-visited request on roaming II-NNI
				AND initial request AND table 6.1.3.1/113
	_			THEN do (NOTE 3)
65	Route	[13]	С	dc
66	Security-Client	[47]	0	dn/a
67	Security-Verify	[47]	0	dn/a
68	Session-Expires	[52]	0	do
69	Session-ID	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE 3)
70	Subject	[13]	0	do
71	Supported	[13]	m*	IF dc2 (PNM: clause 12.17) THEN dm ELSE
	5. 1	F4.407		dm*
72	Target-Dialog	[140]	0	IF table 6.1.3.1/102 THEN do (NOTE 3)
73	Timestamp	[13]	0	do
74	To	[13]	m	dm
75	Trigger-Consent	[82]	0	IF table 6.1.3.1/78 THEN do (NOTE 3)
76	User-Agent	[13]	0	do
77	User-to-User	[83]	0	IF table 6.1.3.1/79 THEN do (NOTE 3)
78	Via	[13]	m	dm

Item	Header field Ro	ef. RFC status	II-NNI condition						
dc1:	request invoked due to AOC AND vi	sited-to-home reques	t on roaming II-NNI						
dc2:	initial request invoked due to PNM in case of ("PN UE redirection" OR "PN access control") AND (non-								
	roaming II-NNI OR loopback traversal scenario OR home-to-visited request on roaming II-NNI)								
dc3:	initial request invoked due to CRS AND (non-roaming II-NNI OR loopback traversal scenario OR home-to-								
	visited request on roaming II-NNI)								
dc4:			CC call" request AND (non-roaming II-NNI OR						
	loopback traversal scenario OR hom								
dc5:		•	g the Call-info header field AND (non-roaming II-						
	NNI OR loopback traversal scenario		,						
dc6:	request invoked due to AOC AND he								
dc7:			user" AND CFU/CFB/CFNR/CFNRc/CD/CFNL						
			OR home-to-visited request on roaming II-NNI)						
dc8:			default setting" in temporary mode AND visited-						
			voked due to OIP/OIR AND "presentation of the						
		ン (non-roaming II-NN	I OR loopback traversal scenario OR home-to-						
	visited request on roaming II-NNI))	ND /	WW.OD.L						
dc9:		ND (non-roaming II-N	INI OR loopback traversal scenario OR home-to-						
d-40.	visited request on roaming II-NNI)	ti ain antil maaaissina DE	FFD required with Deferred Dy beader field AND						
dc10:			FER request with Referred-By header field AND ing II-NNI OR loopback traversal scenario)) OR						
			request AND (non-roaming II-NNI OR loopback						
	traversal scenario OR home-to-visite								
dc11:			NNI OR loopback traversal scenario OR home-to-						
dorr.	visited request on roaming II-NNI)	(14D (Hon-roanning II-I	WW ON TOOPDACK traversal scenario ON Home-to-						
dc12:		s" receiving REFER r	equest with Replaces header field escaped in						
4012.			pack traversal scenario OR home-to-visited						
	request on roaming II-NNI)	g							
NOTE 1:		aped in the header fie	eld for CDIV.						
NOTE 2:	,								
			on to be mapped into the header field)						
NOTE 3:			over the II-NNI, the IBCF in the receiving network						
	can omit or modify the SIP header fi	elds in the received S	SIP message prior to forwarding the SIP message						
	as specified in TS 24.229 [5] clause	5.10.6.2.							
	·								

Table B.7.2: Supported header fields within the INVITE response

Item	Header field	SIP status	Ref.	RFC status	II-NNI condition
		code			
1	Accept	2xx	[13]	0	do
	•	415		С	dc
2	Accept-Encoding	2xx	[13]	0	do
		415		С	dc
3	Accept-Language	2xx	[13]	0	do
4	Accept-Resource-Priority	415 2xx	[70]	С	dc IF table 6.1.3.1/73 THEN do
,		417	[78]	0	(NOTE 3)
5	Alert-Info	180	[13]	0	IF dc1 (CW: clause 12.7) OR dc2 (announcements: clause 12.21) THEN dm ELSE IF table 6.1.3.1/10 THEN do (NOTE 3)
6	Allow	2xx	[13]	m*	dm*
		405		m	dm
		others		0	do
7	Allow-Events	2xx	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE 3)
8	Answer-Mode	2xx	[94]	0	IF table 6.1.3.1/90 THEN do (NOTE 3)
9	Authentication-Info	2xx	[13]	0	IF table 6.1.3.1/7 THEN do (NOTE 3)
10	Call-ID	100 others	[13]	m	dm
11	Call-Info	r	[13]	0	IF dc3 (CCBS: clause 12.11) OR dc4 (CCNR: clause 12.12) OR dc5 (CCNL: clause 12.23) THEN dm ELSE do
12	Contact	18x 199	[13]	0	do
		2xx		m	dm
		3xx 485		0	do
13	Content-Disposition	r	[13]	0	IF dc6 (AOC: clause 12.22) THEN dm ELSE do
14	Content-Encoding	r	[13]	0	do
15	Content-Language	r	[13]	0	do
16	Content-Length	100 others	[13]	t	dt
17	Content-Type	r	[13]	*	IF dc7 (CCBS: clause 12.11) OR dc8 (CCNR/CCNL: clause 12.12/12.23) THEN dm ELSE d*
18	CSeq	100 others	[13]	m	dm
19	Date	100 others	[13]	0	IF dc7 (CCBS: clause 12.11) OR dc8 (CCNR/CCNL: clause 12.12/12.23) THEN dm ELSE do
20	Error-Info	3xx-6xx	[13]	0	IF dc9 (announcements: clause 12.21) THEN dm ELSE IF table 6.1.3.1/13 THEN do (NOTE 3)
21	Expires	r	[13]	0	do
22	Feature-Caps	18x 2xx	[143]	0	IF table 6.1.3.1/103 THEN do (NOTE 3)
23	From	100 others	[13]	m	dm
24	Geolocation-Error	424	[68]	m	dm
		others	ļ	0	do
25	History-Info	r	[25]	0	IF dc10 (CDIV: clause 12.6) THEN dm ELSE IF table 6.1.3.1/50 AND response to initial request THEN do (NOTE 2, NOTE 3)
26	MIME-version	r	[13]	0	do
27	Min-SE	422	[52]	m	dm

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
28	Organization	r	[13]	0	do
29	P-Access-Network-Info	r	[24], [2 4A], [2 4B]	0	IF table 6.1.3.1/36 THEN do (NOTE 3)
30	P-Answer-State	18x 2xx	[73]	0	IF table 6.1.3.1/68 THEN do (NOTE 3)
31	P-Asserted-Identity	r	[44]	0	IF dc11 (TIP/TIR: clause 12.4) THEN dm ELSE IF table 6.1.3.1/27 AND response to initial request THEN do (NOTE 3)
32	P-Charging-Function- Addresses	r	[24], [2 4A]	0	dn/a
33	P-Charging-Vector	r	[24], [2 4A]	0	IF dc12 (CONF: clause 12.19) OR (table 6.1.3.1/38 AND response to initial request) THEN dm (NOTE 3)
34	P-Early-Media	18x	[74]	0	IF dc13 (CAT: clause 12.14) OR dc14 (announcements: clause 12.21) THEN dm ELSE IF table 6.1.3.1/69 THEN do (NOTE 3)
35	P-Media-Authorization	18x 2xx	[42]	0	dn/a
36	P-Preferred-Identity	r	[44]	0	dn/a
37	P-Refused-URI-List	403	[141]	0	IF (non-roaming II-NNI OR loopback traversal scenario) AND table 6.1.3.1/101 THEN do (NOTE 3)
38	Permission-Missing	470	[82]	0	IF table 6.1.3.1/78 THEN do (NOTE 3)
39	Privacy	r	[34]	0	IF dc15 (TIP/TIR: clause 12.4) THEN dm ELSE do
40	Priv-Answer-Mode	2xx	[94]	0	IF table 6.1.3.1/90 THEN do (NOTE 3)
41	Proxy-Authenticate	401 (NOTE 1) 407	[13]	o m	do
		(NOTE 1)			
42	Reason	18x 199 3xx-6xx	[48]	0	IF dc16 (CW: clause 12.7) OR dc17 (ICB: clause 12.10.1) OR dc18 (announcements: clause 12.21) THEN dm ELSE IF table 6.1.3.1/40 THEN do (NOTE 3)
43	Record-Route	18x 199 2xx	[13]	0	do
44	Recv-Info	18x 199 2xx	[39]	С	IF table 6.1.3.1/17 THEN dc (NOTE 3)
45	Relayed-Charge	r	[5]	n/a	dn/a
46	Reply-To	r	[13]	0	do
47	Require	r	[13]	С	IF dc19 (CAT: clause 12.14) THEN dm ELSE dc
48	Restoration-Info	408	[5]	n/a	IF table 6.1.3.1/114 AND response to initial request AND visited-to-home response on roaming II-NNI THEN do (NOTE 3)
49	Retry-After	404 413 480 486 500 503 600 603	[13]	0	do
50	RSeq	18x 199	[18]	0	do

51 S		status			II-NNI condition			
51		code						
31 8	Security-Server	421 494	[47]	0	dn/a			
	Server	r	[13]	0	do			
	Session-Expires	2xx	[52]	0	do			
54 S	Session-ID	r	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE 3)			
	Supported	2xx	[13]	m*	dm*			
	Гimestamp	r	[13]	0	do			
57 T	Го	100 others	[13]	m	dm			
	Jnsupported	420	[13]	m	dm			
	Jser-Agent	r	[13]	0	do			
60 L	Jser-to-User	r	[83]	0	IF table 6.1.3.1/79 THEN do (NOTE 3)			
61 V	/ia	100 others	[13]	m	dm			
62 V	Varning	r	[13]	0	IF dc20 (CDIV: clause 12.6) THEN dm ELSE do			
63 V	WWW-Authenticate	401 (NOTE 1)	[13]	m	dm			
ı		407 (NOTE 1)		0	do			
	response invoked due to CW response on roaming II-NNI)		oaming II-	NNI OR loopback	k traversal scenario OR home-to-visited			
dc2:					Alert-Info header field AND (non-			
dc3:		oked due to	CCBS A		II-NNI OR loopback traversal scenario			
				(non-roaming II-	NNI OR loopback traversal scenario)			
					(non-roaming II-NNI OR loopback			
	traversal scenario OR home- non-100 provisional response				OC AND home-to-visited response on			
	roaming II-NNI							
dc8:	480 (Temporarily Unavailable				ed response on roaming II-NNI IL AND home-to-visited response on			
dc9:					Error-Info header field AND (non-			
dc10:	roaming II-NNI OR loopback 180 (Ringing)/181 (Call Is Be	ing Forward	ed)/200 (C	OK) response to in	nitial request AND			
	visited response on roaming	I-NNI)	`	J	opback traversal scenario OR home-to-			
					response on roaming II-NNI OR non-			
	"presentation is allowed" ANE				response to initial request AND			
					aming II-NNI OR loopback traversal			
	scenario OR home-to-visited				anning in 14141 Oit loopback traversal			
dc13:		uest invoke	d due to C	AT using "forking	g model" AND (non-roaming II-NNI OR			
dc14:	183 (Session Progress) response	onse to initia	l request	invoked due to ar	nnouncements authorizing early media -to-visited response on roaming II-NNI)			
dc15:	(TIP/TIR AND non-100 respo	nse to initial	request A	ND "override the	default setting" in temporary mode			
	AND visited-to-home response on roaming II-NNI) OR (TIP/TIR AND 2xx response to initial request AND							
	"presentation of the network asserted identity is restricted" AND (non-roaming II-NNI OR loopback traversal							
	scenario OR home-to-visited response on roaming II-NNI))							
	480 (Temporarily Unavailable) response invoked due to CW at the expiry of the "CW timer"							
	603 (Decline) response invoked due to "dynamic ICB" on an early dialog 183 (Session Progress) response to initial request invoked due to announcements authorizing early media							
					DR loopback traversal scenario OR			
	home-to-visited response on			Tourning II-IVIVI	or responding the residual of			
				CAT using "early:	session model" AND (non-roaming II-			
	NNI OR loopback traversal so							
dc20:	480 (Temporarily Unavailable)/486 (Busy	Here) res	ponse to initial re	equest AND			
	CFU/CFB/CFNR/CFNRc/CD/	CFNL in cas	se "maxim	um number of div	versions" exceeds AND (non-roaming			
	II-NNI OR loopback traversal	scenario Of	R home-to	-visited response	on roaming II-NNI)			

Item	Header field	SIP	Ref.	RFC status	II-NNI condition			
		status						
		code						
NOTE 1:	NOTE 1: The SIP status code is only applicable over the roaming II-NNI.							
NOTE 2:	: The Privacy header field can	be escaped	in the hea	der field for CDI\	/.			
NOTE 3:	If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network							
	can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message							
	as specified in TS 24.229 [5]	clause 5.10.	6.2.	_	-			

B.8 MESSAGE method

As described in table 6.1, the support of MESSAGE method over the II-NNI is based on bilateral agreement between the operators.

Table B.8.1: Supported header fields within the MESSAGE request

Item	Header field	Ref.	RFC status	II-NNI condition
1	Accept-Contact	[51]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE do
2	Allow	[13], [19]	0	do
3	Allow-Events	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE)
4	Authorization	[13], [19]	0	IF table 6.1.3.1/7 THEN do (NOTE)
5	Call-ID	[13], [19]	m	dm
6	Call-Info	[13], [19]	0	do
7	Content-Disposition	[13], [19]	0	do
8	Content-Encoding	[13], [19]	0	do
9	Content-Language	[13], [19]	0	do
10	Content-Length	[13], [19]	t *	dt
11	Content-Type	[13], [19]		d*
12	CSeq	[13], [19]	m	dm
13 14	Date	[13], [19]	0	do do
15	Expires Feature-Caps	[13], [19] [143]	0	IF table 6.1.3.1/103 AND request outside an
15	realure-Caps	[143]	0	existing dialog THEN do (NOTE)
16	From	[13], [19]	m	dm
17	Geolocation	[68]	0	do
18	Geolocation-Routing	[68]	0	do
19	History-Info	[25]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE IF
		[]		table 6.1.3.1/50 AND request outside an
20	In Donks To	[40] [40]		existing dialog THEN do (NOTE)
20	In-Reply-To Max-Breadth	[13], [19] [79]	0	do do
22	Max-Breadth Max-Forwards	[13], [19]	o m	dm
23	MIME-Version	[13], [19]	0	do
24	Organization	[13], [19]	0	do
25	P-Access-Network-Info	[24], [24 B]	0	IF table 6.1.3.1/36 THEN do (NOTE)
26	P-Asserted-Identity	[44]	0	IF table 6.1.3.1/27 AND request outside an existing dialog THEN dm (NOTE)
27	P-Asserted-Service	[26]	0	IF (non-roaming II-NNI OR home-to-visited request on roaming II-NNI) AND table 6.1.3.1/77 AND request outside an existing dialog THEN do (NOTE)
28	P-Called-Party-ID	[24]	0	IF home-to-visited request on roaming II-NNI AND table 6.1.3.1/34 THEN do (NOTE)
29	P-Charging-Function- Addresses	[24]	0	dn/a
30	P-Charging-Vector	[24]	0	IF table 6.1.3.1/38 AND request outside an existing dialog THEN dm (NOTE)
31	P-Preferred-Identity	[44]	0	dn/a
32	P-Preferred-Service	[26]	0	IF visited-to-home request on roaming II-NNI AND table 6.1.3.1/77 AND request outside an existing dialog THEN do (NOTE)
33	P-Private-Network-Indication	[84]	0	IF table 6.1.3.1/80 AND request outside an existing dialog THEN do (NOTE)
34	P-Profile-Key	[64]	0	IF table 6.1.3.1/59 AND request outside an existing dialog THEN do (NOTE)
35	P-Served-User	[85]	0	IF visited-to-home request on roaming II-NNI AND request outside an existing dialog being sent from "priviledged sender" THEN dm (NOTE)
36	P-User-Database	[60]	0	dn/a
37	P-Visited-Network-ID	[24]	0	dn/a
38	Priority	[13], [19]	0	do
39	Privacy	[34]	0	IF dc2 (OIP/OIR: clause 12.3) THEN dm ELSE do
40	Proxy-Authorization	[13], [19]	0	IF table 6.1.3.1/7 THEN do (NOTE)
41	Proxy-Require	[13], [19]	0	do
42	Reason	[48]	0	IF table 6.1.3.1/40 AND request inside an existing dialog THEN do (NOTE)
43	Record-Route	[13], [19]	n/a	dn/a
44	Referred-By	[53]	0	do
45	Reject-Contact	[51]	0	do

Item	Header field	Ref.	RFC status	II-NNI condition				
46	Relayed-Charge	[5]	n/a	dn/a				
47	Reply-To	[13], [19]	0	do				
48	Request-Disposition	[51]	0	do				
49	Require	[13], [19]	С	dc				
50	Resource-Priority	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE)				
51	Route	[13], [19]	С	dc				
52	Security-Client	[47]	0	dn/a				
53	Security-Verify	[47]	0	dn/a				
54	Session-ID	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)				
55	Subject	[13], [19]	0	do				
56	Supported	[13]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE do				
57	Timestamp	[13], [19]	0	do				
58	То	[13], [19]	m	dm				
59	Trigger-Consent	[82]	0	IF table 6.1.3.1/78 THEN do (NOTE)				
60	User-Agent	[13], [19]	0	do				
61	Via	[13], [19]	m	dm				
dc1:				case of ("PN UE redirection" OR "PN access				
	control") AND (non-roaming II-N							
dc2:				R AND "override the default setting" in temporary				
	mode AND visited-to-home request on roaming II-NNI) OR (request outside an existing dialog invoked due							
	to OIP/OIR AND "presentation of the public user identity is restricted" AND (non-roaming II-NNI OR home-							
	to-visited request on roaming II-NNI))							
NOTE:				over the II-NNI, the IBCF in the receiving network				
				P message prior to forwarding the SIP message				
	as specified in TS 24.229 [5] cla	ause 5.10.6	.2.					

Table B.8.2: Supported header fields within the MESSAGE response

Item	Header field	SIP status	Ref.	RFC status	II-NNI condition
1	Accept	code 415	[13], [19]	m*	dm*
2	Accept-Encoding	415	[13], [19]	m*	dm*
3	Accept-Lincoding Accept-Language	415	[13], [19]	m*	dm*
4	Accept-Resource-Priority	2xx 417	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE 2)
5	Allow	405 others	[13], [19]	m o	dm
6	Allow-Events	2xx	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE 2)
7	Authentication-Info	2xx	[13], [19]	0	IF table 6.1.3.1/7 THEN do (NOTE 2)
8	Call-ID	100 others	[13], [19]	m	dm
9	Call-Info	r	[13], [19]	0	do
10	Contact	3xx 485	[13], [19]	0	do
11	Content-Disposition	r	[13], [19]	0	do
12	Content-Encoding	r	[13], [19]	0	do
13	Content-Language	r	[13], [19]	0	do
14	Content-Length	100 others	[13], [19]	t	dt
15	Content-Type	r	[13], [19]	*	d*
16	CSeq	100 others	[13], [19]	m	dm
17	Date	100 others	[13], [19]	0	do
18	Error-Info	3xx-6xx	[13], [19]	0	IF table 6.1.3.1/13 THEN do (NOTE 2)
19	Expires	r	[13], [19]	0	do
20	Feature-Caps	2xx	[143]	0	IF table 6.1.3.1/103 AND response to request outside an existing dialog THEN do (NOTE 2)
21	From	100 others	[13], [19]	m	dm
22	Geolocation-Error	424 others	[68]	m o	dm do
23	History-Info	r	[25]	0	IF table 6.1.3.1/50 AND response to request outside an existing dialog THEN do (NOTE 2)
24	MIME-version	r	[13]	0	do
25	Organization	r	[13], [19]	0	do
26	P-Access-Network-Info	r	[24], [24A], [24B]	0	IF table 6.1.3.1/36 THEN do (NOTE 2)
27	P-Asserted-Identity	r	[44]	0	IF dc1 (TIP/TIR: clause 12.4) THEN dm ELSE IF table 6.1.3.1/27 AND response to request outside an existing dialog THEN do (NOTE 2)
28	P-Charging-Function- Addresses	r	[24], [24A	0	dn/a
29	P-Charging-Vector	r	[24], [24A]	0	IF table 6.1.3.1/38 AND response to request outside an existing dialog THEN dm (NOTE 2)
30	P-Preferred-Identity	r	[44]	0	dn/a
31	Permission-Missing	470	[82]	0	IF table 6.1.3.1/78 THEN do (NOTE 2)
32	Privacy	r	[34]	0	IF dc2(TIP/TIR: clause 12.4) THEN dm ELSE do
33	Proxy-Authenticate	401 (NOTE 1)	[13], [19]	0	do
		407 (NOTE 1)		m	dm
34	Record-Route	2xx	[13], [19]	n/a	dn/a
35	Relayed-Charge	r	[5]	n/a	dn/a
36	Reply-To	r	[13], [19]	0	do

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition		
37	Require	r	[13], [19]	С	dc		
38	Restoration-Info	504	[5]	n/a	IF table 6.1.3.1/114 AND visited-to- home response on roaming II-NNI THEN do (NOTE 2)		
39	Retry-After	404 413 480 486 500 503 600 603	[13], [19]	0	do		
40	Security-Server	421 494	[47]	0	dn/a		
41	Server	r	[13], [19]	0	do		
42	Session-ID	r	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE 2)		
43	Supported	2xx	[13]	0	do		
44	Timestamp	r	[13], [19]	0	do		
45	То	100 others	[13], [19]	m	dm		
46	Unsupported	420	[13], [19]	0	do		
47	User-Agent	r	[13], [19]	0	do		
48	Via	100 others	[13], [19]	m	dm		
49	Warning	r	[13], [19]	0	do		
50	WWW-Authenticate	401 (NOTE 1)	[13], [19]	m	dm		
		407 (NOTE 1)		0	do		
dc1:							
dc2:							
	(non-roaming II-NNI OR home-to-visited response on roaming II-NNI)) NOTE 1: The SIP status code is only applicable over the roaming II-NNI. NOTE 2: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.						

B.9 NOTIFY method

As described in table 6.1, the support of NOTIFY method over the non-roaming II-NNI is based on bilateral agreement between the operators.

Table B.9.1: Supported header fields within the NOTIFY request

Item	Header field	Ref.	RFC status	II-NNI condition
1	Accept	[13], [20]	0	do
2	Accept-Contact	[51]	0	do
3	Accept-Encoding	[13], [20]	0	do
4	Accept-Language	[13], [20]	0	do
5	Allow	[13], [20]	0	do
6	Allow-Events	[20]	0	do
7	Authorization	[13], [20]	0	IF table 6.1.3.1/7 THEN do (NOTE)
8	Call-ID	[13], [20]	m	dm
9	Call-Info	[13]	0	do
10	Contact	[13], [20]	m	dm
11	Content-Disposition	[13], [20]	0	do
12	Content-Encoding	[13], [20]	0	do
13	Content-Language	[13], [20]	0	do
14	Content-Length	[13], [20]	t	dt
15	Content-Type	[13], [20]	*	d*
16	CSeq	[13], [20]	m	dm
17	Date	[13], [20]	0	do
18	Event	[20]	m	dm
19	Feature-Caps	[143]	0	IF table 6.1.3.1/103 THEN do (NOTE)
20	From	[13], [20]	m	dm
21	Geolocation	[68]	0	do
22	Geolocation-Routing	[68]	0	do
23	History-Info	[25]	0	IF table 6.1.3.1/50 THEN do (NOTE)
24	Max-Breadth	[79]	0	do
25	Max-Forwards	[13], [20]	m	dm
26	MIME-Version	[13], [20]	0	do
27	P-Access-Network-Info	[24], [24 B]	0	IF table 6.1.3.1/36 THEN do (NOTE)
28	P-Asserted-Identity	[44]	0	IF table 6.1.3.1/27 THEN do (NOTE)
29	P-Charging-Function- Addresses	[24]	0	dn/a
30	P-Charging-Vector	[24]	0	IF table 6.1.3.1/38 THEN dm (NOTE)
31	P-Preferred-Identity	[44]	0	dn/a
32	Privacy	[34]	0	do
33	Proxy-Authorization	[13], [20]	0	IF table 6.1.3.1/7 THEN do (NOTE)
34	Proxy-Require	[13], [20]	0	do
35	Reason	[48]	0	IF table 6.1.3.1/40 THEN do (NOTE)
36	Record-Route	[13], [20]	0	do
37	Referred-By	[53]	0	do
38	Reject-Contact	[51]	0	do
39	Relayed-Charge	[5]	n/a	dn/a
40	Request-Disposition	[51]	0	do
41	Require	[13], [20]	0	do
42	Resource-Priority	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE)
43	Route	[13], [20]	С	dc
44	Security-Client	[47]	0	dn/a
45	Security-Verify	[47]	0	dn/a
46	Session-ID	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)
47	Subscription-State	[20]	m	dm
48	Supported	[13], [20]	0	do
49	Timestamp	[13], [20]	0	do
50	То	[13], [20]	m	dm
51	User-Agent	[13], [20]	0	do
52	Via	[13], [20]	m	dm
53	Warning	[13], [20]	0	do
NOTE:	If the conchility appoified in tabl	0612110	not ournarted a	over the ILNINI the IDCE in the receiving network

NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.

Table B.9.2: Supported header fields within the NOTIFY response

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
1	Accept	415	[13], [20]	0	do
2	Accept-Encoding	415	[13], [20]	0	do
3	Accept-Language	415	[13], [20]	0	do
4	Accept-Resource-Priority	2xx	[78]	0	IF table 6.1.3.1/73 THEN do
5	Allow	417 405	[13], [20]	m	(NOTE 2)
		others		0	do
6	Allow-Events	2xx 489	[20]	o m	do dm
7	Authentication-Info	2xx	[13], [20]	0	IF table 6.1.3.1/7 THEN do (NOTE 2)
8	Call-ID	100 others	[13], [20]	m	dm
9	Contact	2xx	[13], [20]	0	do
		3xx	1 11 1	m	dm
		485	1	0	do
10	Content-Disposition	r	[13], [20]	0	do
11	Content-Encoding	r	[13], [20]	0	do
12	Content-Language	r	[13], [20]	0	do
13	Content-Length	100 others	[13], [20]	t	dt
14	Content-Type	r	[13], [20]	*	d*
15	CSeq	100 others	[13], [20]	m	dm
16	Date	100 others	[13], [20]	0	do
17	Error-Info	3xx-6xx	[13], [20]	0	IF table 6.1.3.1/13 THEN do (NOTE 2)
18	Feature-Caps	2xx	[143]	0	IF table 6.1.3.1/103 THEN do (NOTE 2)
19	From	100 others	[13], [20]	m	dm
20	Geolocation-Error	424	[68]	m	dm
04	NAINAT	others	[40] [00]	0	do
21	MIME-version P-Access-Network-Info	r	[13], [20]	0	do IF table 6.1.3.1/36 THEN do
		r	[24], [24A], [24B]	0	(NOTE 2)
23	P-Asserted-Identity	r	[44]	0	IF table 6.1.3.1/27 THEN do (NOTE 2)
24	P-Charging-Function- Addresses	r	[24], [24A]	0	dn/a
25	P-Charging-Vector	r	[24], [24A]	0	IF table 6.1.3.1/38 THEN dm (NOTE 2)
26	P-Preferred-Identity	r	[44]	0	dn/a
27	Privacy	r	[34]	0	do
28	Proxy-Authenticate	401 (NOTE 1)	[13], [20]	0	do
		407 (NOTE 1)		m	dm
29	Record-Route	2xx	[13], [20]	0	do
30	Relayed-Charge	r	[5]	n/a	dn/a
31	Require	r	[13], [20]	0	do
32	Restoration-Info	504	[5]	n/a	IF table 6.1.3.1/114 AND visited-to- home response on roaming II-NNI THEN do (NOTE 2)
33	Retry-After	404 413 480 486 500 503 600 603	[13], [20]	0	do

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
34	Security-Server	421 494	[47]	0	dn/a
35	Server	r	[13], [20]	0	do
36	Session-ID	r	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE 2)
37	Supported	2xx	[13], [20]	0	do
38	Timestamp	r	[13], [20]	0	do
39	То	100 others	[13], [20]	m	dm
40	Unsupported	420	[13], [20]	0	do
41	User-Agent	r	[13], [20]	0	do
42	Via	100 others	[13], [20]	m	dm
43	Warning	r	[13], [20]	0	do
44	WWW-Authenticate	401 (NOTE 1)	[13], [20]	m	dm
		407 (NOTE 1)		0	do

NOTE 1: The SIP status code is only applicable over the roaming II-NNI.

NOTE 2: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.

B.10 OPTIONS method

Table B.10.1: Supported header fields within the OPTIONS request

Item	Header field	Ref.	RFC status	II-NNI condition
1	Accept	[13]	m*	dm*
2	Accept-Contact	[51]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE do
3	Accept-Encoding	[13]	0	do
4	Accept-Language	[13]	0	do
5	Allow	[13]	0	do
6	Allow-Events	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE)
7	Authorization	[13]	0	IF table 6.1.3.1/7 THEN do (NOTE)
8	Call-ID	[13]	m	dm
9	Call-Info	[13]	0	do
10	Contact	[13]	0	do
11	Content-Disposition	[13]	0	do
12	Content-Encoding	[13]	0	do
13	Content-Language	[13]	0	do
14	Content-Length	[13]	t	dt
15	Content-Type	[13]	*	d*
16	CSeq	[13]	m	dm
17	Date	[13]	0	do
18	Feature-Caps	[143]	0	IF table 6.1.3.1/103 AND request outside an existing dialog THEN do (NOTE)
19	From	[13]	m	dm
20	Geolocation	[68]	0	do
21	Geolocation-Routing	[68]	0	do
22	History-Info	[25]	0	IF (dc1 (PNM: clause 12.17) THEN dm ELSE IF
				table 6.1.3.1/50 AND request outside an existing dialog THEN do (NOTE)
23	Max-Breadth	[79]	0	do
24	Max-Forwards	[13]	m	dm
25	MIME-Version	[13]	0	do
26	Organization	[13]	0	do
27	P-Access-Network-Info	[24], [2	0	IF table 6.1.3.1/36 THEN do (NOTE)
		4B]		
28	P-Asserted-Identity	[44]	0	IF table 6.1.3.1/27 AND request outside an existing dialog THEN dm (NOTE)
29	P-Asserted-Service	[26]	0	IF (non-roaming II-NNI OR home-to-visited
				request on roaming II-NNI) AND
				table 6.1.3.1/77 AND request outside an
				existing dialog THEN do (NOTE)
30	P-Called-Party-ID	[24]	0	IF home-to-visited request on roaming II-NNI
	•			AND table 6.1.3.1/34 THEN do (NOTE)
31	P-Charging-Function-	[24]	0	dn/a
	Addresses			
32	P-Charging-Vector	[24]	0	IF table 6.1.3.1/38 AND request outside an
				existing dialog THEN dm (NOTE)
33	P-Preferred-Identity	[44]	0	dn/a
34	P-Preferred-Service	[26]	0	IF visited-to-home request on roaming II-NNI
				AND table 6.1.3.1/77 AND request outside an
		1		existing dialog THEN do (NOTE)
35	P-Private-Network-Indication	[84]	0	IF table 6.1.3.1/80 AND request outside an
		<u> </u>		existing dialog THEN do (NOTE)
36	P-Profile-Key	[64]	0	IF table 6.1.3.1/59 AND request outside an
				existing dialog THEN do (NOTE)
37	P-Served-User	[85]	0	IF visited-to-home request on roaming II-NNI
				AND request outside an existing dialog being
				sent from "priviledged sender" THEN dm
				(NOTE)
38	P-User-Database	[60]	0	dn/a
39	P-Visited-Network-ID	[24]	0	dn/a
40	Privacy	[34]	0	IF dc2 (OIP/OIR: clause 12.3) THEN dm ELSE
44	Dravas Auth	[40]		do
41	Proxy-Authorization	[13]	0	IF table 6.1.3.1/7 THEN do (NOTE)
42	Proxy-Require	[13]	0	do
43	Reason	[48]	0	IF table 6.1.3.1/40 AND request inside an
1.1	Pagard Payes	[40]		existing dialog THEN do (NOTE)
44 45	Record-Route	[13]	0	do do/o
4 0	Recv-Info	[39]	n/a	dn/a

Item	Header field	Ref.	RFC status	II-NNI condition		
46	Referred-By	[53]	0	do		
47	Reject-Contact	[51]	0	do		
48	Relayed-Charge	[5]	n/a	dn/a		
49	Request-Disposition	[51]	0	do		
50	Require	[13]	С	dc		
51	Resource-Priority	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE)		
52	Route	[13]	С	dc		
53	Security-Client	[47]	0	dn/a		
54	Security-Verify	[47]	0	dn/a		
55	Session-ID	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)		
56	Supported	[13]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE do		
57	Timestamp	[13]	0	do		
58	То	[13]	m	dm		
59	User-Agent	[13]	0	do		
60	Via	[13]	m	dm		
dc1:	request outside an existing dialog invoked due to PNM in case of ("PN UE redirection" OR "PN access control") AND (non-roaming II-NNI OR home-to-visited request on roaming II-NNI)					
dc2:	(request outside an existing dialog invoked due to OIP/OIR AND "override the default setting" in temporary mode AND visited-to-home request on roaming II-NNI) OR (request outside an existing dialog invoked due to OIP/OIR AND "presentation of the public user identity is restricted" AND (non-roaming II-NNI OR home-to-visited request on roaming II-NNI))					
NOTE:	If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.					

Table B.10.2: Supported header fields within the OPTIONS response

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
1	Accept	2xx	[13]	m*	dm*
•	7.000pt	415	[10]	С	dc
2	Accept-Encoding	2xx	[13]	m*	dm*
		415		С	dc
3	Accept-Language	2xx	[13]	m*	dm*
		415		С	dc
4	Accept-Resource-Priority	2xx 417	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE 2)
5	Allow	2xx	[13]	m*	dm*
		405		m	dm
•	Allew Evente	others	[00]	0	do
6	Allow-Events	2xx	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE 2)
7	Authentication-Info	2xx	[13]	0	IF table 6.1.3.1/7 THEN do (NOTE 2)
8	Call-ID	100 others	[13]	m	dm
9	Call-Info	r	[13]	0	do
10	Contact	2xx 3xx 485	[13]	0	do
11	Content-Disposition	r	[13]	0	do
12	Content-Encoding	r	[13]	0	do
13	Content-Language	r	[13]	0	do
14	Content-Length	100 others	[13]	t	dt
15	Content-Type	r	[13]	*	d*
16	CSeq	100 others	[13]	m	dm
17	Date	100 others	[13]	0	do
18	Error-Info	3xx-6xx	[13]	0	IF table 6.1.3.1/13 THEN do (NOTE 2)
19	Feature-Caps	2xx	[143]	0	IF table 6.1.3.1/103 AND response to request outside an existing dialog THEN do (NOTE 2)
20	From	100 others	[13]	m	dm
21	Geolocation-Error	424	[68]	m	dm
		others		0	do
22	History-Info	r	[25]	0	IF table 6.1.3.1/50 AND response to request outside an existing dialog THEN do (NOTE 2)
23	MIME-version	r	[13]	0	do
24	Organization	r	[13]	0	do
25	P-Access-Network-Info	r	[24], [2 4A], [2 4B]	0	IF table 6.1.3.1/36 THEN do (NOTE 2)
26	P-Asserted-Identity	r	[44]	0	IF dc1 (TIP/TIR: clause 12.4) THEN dm ELSE IF table 6.1.3.1/27 AND response to request outside an existing dialog THEN do (NOTE 2)
27	P-Charging-Function- Addresses	r	[24], [2 4A]	0	dn/a
28	P-Charging-Vector	r	[24], [2 4A]	0	IF table 6.1.3.1/38 AND response to request outside an existing dialog THEN dm (NOTE 2)
29	P-Preferred-Identity	r	[44]	0	dn/a
30	Privacy	r	[34]	0	IF dc2 (TIP/TIR: clause 12.4) THEN dm ELSE do
31	Proxy-Authenticate	401 (NOTE 1)	[13]	0	do
		407 (NOTE 1)		m	dm

33 Red 34 Rel 35 Red 36 Res 36 Res 37 Ret 37 Ret 38 Sed 40 Ses 41 Sup 42 Tim 43 To 44 Uns 45 Use 46 Via 47 Wa 48 WW	Header field	SIP status code	Ref.	RFC status	II-NNI condition			
34 Rel 35 Rec 36 Res 37 Ret 37 Ret 38 Sec 39 Ser 40 Ses 41 Sup 42 Tim 43 To 44 Uns 45 Use 46 Via 47 Wa 48 WW	ecord-Route	2xx	[13]	0	do			
35 Rec 36 Res 36 Res 37 Ret 37 Ret 38 Sec 39 Ser 40 Ses 41 Sup 42 Tim 43 To 44 Uns 45 Use 46 Via 47 Wa 48 WW	ecv-Info	2xx others	[39]	n/a	dn/a			
35 Rec 36 Res 36 Res 37 Ret 37 Ret 38 Sec 39 Ser 40 Ses 41 Sup 42 Tim 43 To 44 Uns 45 Use 46 Via 47 Wa 48 WW	elayed-Charge	r	[5]	n/a	dn/a			
37 Ret 38 Sec 39 Ser 40 Ses 41 Sup 42 Tim 43 To 44 Uns 45 Use 46 Via 47 Wa 48 WW	equire	r	[13]	С	dc			
38 Sec 39 Ser 40 Ses 41 Sup 42 Tim 43 To 44 Uns 45 Use 46 Via 47 Wa 48 WW	estoration-Info	504	[5]	n/a	IF table 6.1.3.1/114 AND visited-to- home response on roaming II-NNI THEN do (NOTE 2)			
39 Ser 40 Ses 41 Sup 42 Tim 43 To 44 Uns 45 Use 46 Via 47 Wa 48 WW	etry-After	404 413 480 486 500 503 600 603	[13]	0	do			
40 Ses 41 Sup 42 Tim 43 To 44 Uns 45 Use 46 Via 47 Wa 48 WW	ecurity-Server	421 494	[47]	0	dn/a			
40 Ses 41 Sup 42 Tim 43 To 44 Uns 45 Use 46 Via 47 Wa 48 WW	erver	r	[13]	0	do			
42 Tim 43 To 44 Uns 45 Use 46 Via 47 Wa 48 WW	ession-ID	r	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE 2)			
43 To 44 Uns 45 Use 46 Via 47 Wa 48 WW	upported	2xx	[13]	m*	dm*			
44 Uns 45 Use 46 Via 47 Wa 48 WW	imestamp	r	[13]	0	do			
45 Use 46 Via 47 Wa 48 WW dc1: (TI	0	100 others	[13]	m	dm			
46 Via 47 Wa 48 WW dc1: (TI	nsupported	420	[13]	m	dm			
47 Wa 48 WW dc1: (TI	ser-Agent	r	[13]	0	do			
dc1: (Ti	ia	100 others	[13]	m	dm			
dc1: (Ti	/arning	r	[13]	0	do			
roa AN	/WW-Authenticate	401 (NOTE 1)	[13]	m	dm			
roa AN		407 (NOTE 1)		0	do			
red (nd	(TIP/TIR AND non-100 respo temporary mode AND visited	nse to reque -to-home res alog AND "p e-to-visited r	est outside sponse on presentation response o	an existing dialo roaming II-NNI) (on of the network on roaming II-NNI	g AND "override the default setting" in OR (TIP/TIR AND 2xx response to asserted identity is restricted" AND			

NOTE 2: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.

B.11 PRACK method

Table B.11.1: Supported header fields within the PRACK request

Item	Header field	Ref.	RFC status	II-NNI condition			
1	Accept	[13], [18]	0	do			
2	Accept-Contact	[51]	0	do			
3	Accept-Encoding	[13], [18]	0	do			
4	Accept-Language	[13], [18]	0	do			
5	Allow	[13], [18]	0	do			
6	Allow-Events	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE)			
7	Authorization	[13], [18]	0	IF table 6.1.3.1/7 THEN do (NOTE)			
8	Call-ID	[13], [18]	m	dm			
9	Content-Disposition	[13], [18]	0	do			
10	Content-Encoding	[13], [18]	0	do			
11	Content-Language	[13], [18]	0	do			
12	Content-Length	[13], [18]	t	dt			
13	Content-Type	[13], [18]	*	d*			
14	CSeq	[13], [18]	m	dm			
15	Date	[13], [18]	0	do			
16	From	[13], [18]	m	dm			
17	Max-Breadth	[79]	0	do			
18	Max-Forwards	[13], [18]	m	dm			
19	MIME-Version	[13], [18]	0	do			
20	P-Access-Network-Info	[24], [24 B]	0	IF table 6.1.3.1/36 THEN do (NOTE)			
21	P-Charging-Function- Addresses	[24]	0	dn/a			
22	P-Charging-Vector	[24]	0	dn/a			
23	P-Early-Media	[74]	0	IF dc1 (CAT: clause 12.14) THEN dm ELSE IF table 6.1.3.1/69 THEN do (NOTE)			
24	Privacy	[34]	0	do			
25	Proxy-Authorization	[13], [18]	0	IF table 6.1.3.1/7 THEN do (NOTE)			
26	Proxy-Require	[13], [18]	0	do			
27	RAck	[18]	m	dm			
28	Reason	[48]	0	IF table 6.1.3.1/40 THEN do (NOTE)			
29	Record-Route	[13], [18]	0	do			
30	Recv-Info	[39]	0	IF table 6.1.3.1/17 THEN do (NOTE)			
31	Referred-By	[53]	0	do			
32	Reject-Contact	[51]	0	do			
33	Relayed-Charge	[5]	n/a	dn/a			
34	Request-Disposition	[51]	0	do			
35	Require	[13], [18]	С	dc			
36	Resource-Priority	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE)			
37	Route	[13], [18]	С	dc			
38	Session-ID	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)			
39	Supported	[13], [18]	0	do			
40	Timestamp	[13], [18]	0	do			
41	То	[13], [18]	m	dm			
42	User-Agent	[13], [18]	0	do			
43	Via	[13], [18]	m	dm			
dc1: request invoked due to CAT to first 18x response with P-Early-Media header field cancelling "CAT service" provided by terminating AS AND (non-roaming II-NNI OR loopback traversal scenario OR home-to-visited request on roaming II-NNI)							
NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.							

Table B.11.2: Supported header fields within the PRACK response

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
1	Accept	415	[13], [18]	С	dc
2	Accept-Encoding	415	[13], [18]	С	dc
3	Accept-Language	415	[13], [18]	С	dc
4	Accept-Resource-Priority	2xx 417	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE 2)
5	Allow	405 others	[13], [18]	m o	dm do
6	Allow-Events	2xx	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE 2)
7	Authentication-Info	2xx	[13], [18]	0	IF table 6.1.3.1/7 THEN do (NOTE 2)
8	Call-ID	100 r	[13], [18]	m	dm
9	Contact	3xx 485	[13], [18]	0	do
10	Content-Disposition	r	[13], [18]	0	do
11	Content-Encoding	r	[13], [18]	0	do
12	Content-Language	r	[13], [18]	0	do
13	Content-Length	100 others	[13], [18]	t	dt
14	Content-Type	r	[13], [18]	*	d*
15	CSeq	100 others	[13], [18]	m	dm
16	Date	100 others	[13], [18]	0	do
17	Error-Info	3xx-6xx	[13], [18]	0	IF table 6.1.3.1/13 THEN do (NOTE 2)
18	From	100 others	[13], [18]	m	dm
19	MIME-version	r	[13], [18]	0	do
20	P-Access-Network-Info	r	[24], [24A], [24B]	0	IF table 6.1.3.1/36 THEN do (NOTE 2)
21	P-Charging-Function- Addresses	r	[24], [24A]	0	dn/a
22	P-Charging-Vector	r	[24], [24A]	0	dn/a
23	P-Early-Media	2xx	[74]	0	IF table 6.1.3.1/69 THEN do (NOTE 2)
		others		n/a	dn/a
24	Privacy	r	[34]	0	do
25	Proxy-Authenticate	401 (NOTE 1)	[13], [18]	0	do
		407 (NOTE 1)		m	dm
26 27	Record-Route	2xx	[13], [18]	0	do IF table 6.1.3.1/17 THEN dc
21	Recv-Info	2xx	[39]	С	(NOTE 2)
		others		0	IF table 6.1.3.1/17 THEN do (NOTE 2)
28	Relayed-Charge	r	[5]	n/a	dn/a
29	Require	r 40.4	[13], [18]	С	dc
30	Retry-After	404 413 480 486 500 503 600 603	[13], [18]	0	do
31	Security-Server	421 494	[47]	n/a	dn/a
32	Server	r	[13], [18]	0	do
33	Session-ID	r	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE 2)

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
34	Supported	2xx	[13], [18]	0	do
35	Timestamp	r	[13], [18]	0	do
36	То	100 others	[13], [18]	m	dm
37	Unsupported	420	[13], [18]	m	dm
38	User-Agent	r	[13], [18]	0	do
39	Via	100 others	[13], [18]	m	dm
40	Warning	r	[13], [18]	0	do
41	WWW-Authenticate	401 (NOTE 1)	[13], [18]	m	dm
		407 (NOTE 1)		0	do

NOTE 1: The SIP status code is only applicable over the roaming II-NNI.

NOTE 2: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.

B.12 PUBLISH method

As described in table 6.1, the support of PUBLISH method over the non-roaming II-NNI is based on bilateral agreement between the operators.

Table B.12.1: Supported header fields within the PUBLISH request

Item	Header field	Ref.	RFC status	II-NNI condition
1	Accept-Contact	[51]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE do
2	Allow	[13], [21]	0	do
3	Allow-Events	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE)
4	Authorization	[13], [21]	0	IF table 6.1.3.1/7 THEN do (NOTE)
5	Call-ID	[13], [21]	m	dm
6	Call-Info	[13], [21]	0	IF dc2 (CCBS/CCNR/CCNL:
	Can mio	[10], [21]		clause 12.11/12.12/12.23) THEN dm ELSE do
7	Contact	[13], [21]	n/a	dn/a
8	Content-Disposition	[13], [21]	0	do
9	Content-Disposition Content-Encoding	[13], [21]	0	do
10	Content-Lincoung Content-Language	[13], [21]	0	do
11	Content-Language Content-Length	[13], [21]	t	dt
12	Content-Type	[13], [21]	*	d*
13				dm
14	CSeq	[13], [21]	m	
	Date	[13], [21]	0	do
15	Event	[20]	m	dm
16	Expires	[13], [21]	0	IF dc2 (CCBS/CCNR/CCNL:
	F	F4 403		clause 12.11/12.12/12.23) THEN dm ELSE do
17	Feature-Caps	[143]	0	IF table 6.1.3.1/103 AND request outside an
				existing dialog THEN do
18	From	[13], [21]	m	dm
19	Geolocation	[68]	0	do
20	Geolocation-Routing	[68]	0	do
21	History-Info	[25]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE IF
				table 6.1.3.1/50 AND request outside an
				existing dialog THEN do (NOTE)
22	In-Reply-To	[13], [21]	n/a	dn/a
23	Max-Breadth	[79]	0	do
24	Max-Forwards	[13], [21]	m	dm
25	MIME-Version	[13], [21]	0	do
26	Organization	[13], [21]	0	do
27	P-Access-Network-Info	[24], [24 B]	0	IF table 6.1.3.1/36 THEN do (NOTE)
28	P-Asserted-Identity	[44]	0	IF dc2 (CCBS/CCNR/CCNL:
		1		clause 12.11/12.12/12.23) OR table 6.1.3.1/27
				AND request outside an existing dialog THEN
				dm (NOTE)
29	P-Asserted-Service	[26]	0	IF (non-roaming II-NNI OR home-to-visited
		[,		request on roaming II-NNI) AND
				table 6.1.3.1/77 AND request outside an
				existing dialog THEN do (NOTE)
30	P-Called-Party-ID	[24]	0	IF home-to-visited request on roaming II-NNI
	. Cancar any 12	[]		AND table 6.1.3.1/34 THEN do (NOTE)
31	P-Charging-Function-	[24]	0	dn/a
	Addresses	[]		ar, a
32	P-Charging-Vector	[24]	0	IF table 6.1.3.1/38 AND request outside an
		' '	1	existing dialog THEN dm (NOTE)
33	P-Preferred-Identity	[44]	0	dn/a
34	P-Preferred-Service	[26]	0	IF visited-to-home request on roaming II-NNI
"		[-0]	"	AND table 6.1.3.1/77 AND request outside an
				existing dialog THEN do (NOTE)
35	P-Private-Network-Indication	[84]	0	IF table 6.1.3.1/80 AND request outside an
	. I mate Network indication	[~ 1]	~	existing dialog THEN do (NOTE)
36	P-Profile-Key	[64]	0	IF table 6.1.3.1/59 AND request outside an
	. I Tomo Roy	ا ت تا	~	existing dialog THEN do (NOTE)
37	P-Served-User	[85]	0	IF visited-to-home request on roaming II-NNI
"	. 50,754 5501	رددا	~	AND request outside an existing dialog being
				sent from "priviledged sender" THEN dm
				(NOTE)
38	P-User-Database	[60]	0	dn/a
39	P-Visited-Network-ID	[24]		dn/a
40			0	
	Priority	[13], [21]	0	do
41	Privacy	[34]	0	IF dc3 (OIP/OIR: clause 12.3) THEN dm ELSE
40	Dravas Assib	[40] [04]	<u> </u>	do
42	Proxy-Authorization	[13], [21]	0	IF table 6.1.3.1/7 THEN do (NOTE)

Item	Header field	Ref.	RFC status	II-NNI condition		
43	Proxy-Require	[13], [21]	0	do		
44	Reason	[48]	0	IF table 6.1.3.1/40 AND request inside an existing dialog THEN do (NOTE)		
45	Referred-By	[53]	0	do		
46	Reject-Contact	[51]	0	do		
47	Relayed-Charge	[5]	n/a	dn/a		
48	Reply-To	[13], [21]	n/a	dn/a		
49	Request-Disposition	[51]	0	do		
50	Require	[13], [21]	0	do		
51	Resource-Priority	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE)		
52	Route	[13], [21]	С	dc		
53	Security-Client	[47]	0	dn/a		
54	Security-Verify	[47]	0	dn/a		
55	Session-ID	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)		
56	SIP-If-Match	[21]	0	do		
57	Subject	[13], [21]	0	do		
58	Supported	[13], [21]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE do		
59	Timestamp	[13], [21]	0	do		
60	То	[13], [21]	m	dm		
61	User-Agent	[13], [21]	0	do		
62	Via	[13], [21]	m	dm		
dc1:	control") AND (non-roaming II-N	NŇI OR hom	ne-to-visited rec			
dc2:	(non-roaming II-NNI OR loopba CCBS/CCNR/CCNL resuming	ick traversal the "CC req	scenario) OR (uest" AND (non	CNR/CCNL suspending the "CC request" AND (request inside an existing dialog invoked due to -roaming II-NNI OR loopback traversal scenario))		
dc3:	(request outside an existing dialog invoked due to OIP/OIR AND "override the default setting" in temporary mode AND visited-to-home request on roaming II-NNI) OR (request outside an existing dialog invoked due to OIP/OIR AND "presentation of the public user identity is restricted" AND (non-roaming II-NNI OR home-					
NOTE:	to-visited request on roaming II		not ounnorted	ever the H NNI the IDCE in the receiving and the re-		
NOTE:						
				ir message phor to forwarding the SIP message		
NOTE:	If the capability specified in table	le 6.1.3.1 is der fields in	the received SI	over the II-NNI, the IBCF in the receiving netwo P message prior to forwarding the SIP messag		

Table B.12.2: Supported header fields within the PUBLISH response

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
1	Accept	415	[13], [21]	m*	dm*
2	Accept-Encoding	415	[13], [21]	m*	dm*
3	Accept-Language	415	[13], [21]	m*	dm*
4	Accept-Resource-Priority	200 417	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE 2)
5	Allow	405 others	[13], [21]	m o	dm do
6	Allow-Events	2xx	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE 2)
_	Authorition late	489	[40] [04]	m	dm
8	Authentication-Info Call-ID	2xx 100 others	[13], [21] [13], [21]	m	IF table 6.1.3.1/7 THEN do (NOTE 2) dm
9	Call-Info	r	[13], [21]	0	do
10	Contact	3xx 485	[13], [21]	0	do
11	Content-Disposition	r	[13], [21]	0	do
12	Content-Encoding	r	[13], [21]	0	do
13	Content-Language	r	[13], [21]	0	do
14	Content-Length	100 others	[13], [21]	t	dt
15	Content-Type	r	[13], [21]	*	d*
16	CSeq	100 others	[13], [21]	m	dm
17	Date	100 others	[13], [21]	0	do
18	Error-Info	3xx-6xx	[13], [21]	0	IF table 6.1.3.1/13 THEN do (NOTE 2)
19	Expires	2xx	[13], [21]	m	dm
20	Feature-Caps	others 200	[143]	0	do IF table 6.1.3.1/103 AND response to request outside an existing dialog THEN do
21	From	100 others	[13], [21]	m	dm
22	Geolocation-Error	424	[68]	m	dm
22	Listan, Info	others	[05]	0	do
23	History-Info	r	[25]	0	IF table 6.1.3.1/50 AND response to request outside an existing dialog THEN do (NOTE 2)
24	MIME-version	r	[13], [21]	0	do
25	Min-Expires	423	[13], [21]	m	dm
26	Organization	r	[13], [21]	0	do
27	P-Access-Network-Info	r	[24], [24A], [24B]	0	IF table 6.1.3.1/36 THEN do (NOTE 2)
28	P-Asserted-Identity	r	[44]	0	IF dc1 (TIP/TIR: clause 12.4) THEN dm ELSE IF table 6.1.3.1/27 AND response to request outside an existing dialog THEN do (NOTE 2)
29	P-Charging-Function- Addresses	r	[24], [24A]	0	dn/a
30	P-Charging-Vector	r	[24], [24A]	0	IF table 6.1.3.1/38 AND response to request outside an existing dialog THEN dm (NOTE 2)
31	P-Preferred-Identity	r	[44]	0	dn/a
32	Privacy	r	[34]	0	IF dc2 (TIP/TIR: clause 12.4) THEN dm ELSE do
33	Proxy-Authenticate	401 (NOTE 1)	[13], [21]	0	do
		407 (NOTE 1)		m	dm
34	Relayed-Charge	r	[5]	n/a	dn/a
35	Require	r	[13], [21]	0	do

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition			
36	Restoration-Info	504	[5]	n/a	IF table 6.1.3.1/114 AND visited-to- home response on roaming II-NNI THEN do (NOTE 2)			
37	Retry-After	404 413 480 486 500 503 600 603	[13], [21]	0	do			
38	Security-Server	421 494	[47]	0	dn/a			
39	Server	r	[13], [21]	0	do			
40	Session-ID	r	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE 2)			
41	SIP-Etag	2xx	[21]	m	dm			
42	Supported	2xx	[13], [21]	0	do			
43	Timestamp	r	[13], [21]	0	do			
44	То	100 others	[13], [21]	m	dm			
45	Unsupported	420	[13], [21]	0	do			
46	User-Agent	r	[13], [21]	0	do			
47	Via	100 others	[13], [21]	m	dm			
48	Warning	r	[13], [21]	0	do			
49	WWW-Authenticate	401 (NOTE 1)	[13], [21]	m	dm			
		407 (NOTE 1)		0	do			
dc1:		ning II-NNI)) (OR (TIP/TIR	AND response	ID (visited-to-home response on et or request outside an existing dialog aming II-NNI)			
dc2:	dc2: (TIP/TIR AND non-100 response to request outside an existing dialog AND "override the default setting" in temporary mode AND visited-to-home response on roaming II-NNI) OR (TIP/TIR AND 2xx response to request outside an existing dialog AND "presentation of the network asserted identity is restricted" AND (non-roaming II-NNI OR home-to-visited response on roaming II-NNI))							
	NOTE 1: The SIP status code is only applicable over the roaming II-NNI. NOTE 2: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.							

B.13 REFER method

As described in table 6.1, the support of REFER method over the II-NNI is based on bilateral agreement between the operators.

Table B.13.1: Supported header fields within the REFER request

121

Item	Header field	Ref.	RFC status	II-NNI condition
1	Accept	[13], [22]	0	do
2	Accept-Contact	[51]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE do
3	Accept-Encoding	[13], [22]	0	do
4	Accept-Language	[13], [22]	0	do
5	Allow	[13], [22]	0	do
6	Allow-Events	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE)
7	Authorization	[13], [22]	0	IF table 6.1.3.1/7 THEN do (NOTE)
8	Call-ID	[13], [22]	m	dm
9	Contact	[13], [22]	m	dm
10	Content-Disposition	[13], [22]	0	do
11	Content-Encoding	[13], [22]	0	do
12	Content-Language	[13], [22]	0	do
13	Content-Length	[13], [22]	0	do
14	Content-Type	[13], [22]	*	d*
15	CSeq	[13], [22]	m	dm
16	Date	[13], [22]	0	do
17	Expires	[13], [22]	0	do
18	Feature-Caps	[143]	0	IF table 6.1.3.1/103 AND request outside an existing dialog THEN do (NOTE)
19	From	[13], [22]	m	dm
20	Geolocation	[68]	0	do
21	Geolocation-Routing	[68]	0	do
22	History-Info	[25]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE IF table 6.1.3.1/50 AND request outside an existing dialog THEN do (NOTE)
23	Max-Breadth	[79]	0	do
24	Max-Forwards	[13], [22]	m	dm
25	MIME-Version	[13], [22]	0	do
26	Organization	[13], [22]	0	do
27	P-Access-Network-Info	[24], [24 B]	0	IF table 6.1.3.1/36 THEN do (NOTE)
28	P-Asserted-Identity	[44]	0	IF table 6.1.3.1/27 AND request outside an existing dialog THEN dm (NOTE)
29	P-Asserted-Service	[26]	0	IF (non-roaming II-NNI OR home-to-visited request on roaming II-NNI) AND table 6.1.3.1/77 AND request outside an existing dialog THEN do (NOTE)
30	P-Called-Party-ID	[24], [24 A]	0	IF home-to-visited request on roaming II-NNI AND table 6.1.3.1/34 THEN do (NOTE)
31	P-Charging-Function- Addresses	[24]	0	dn/a
32	P-Charging-Vector	[24]	0	IF table 6.1.3.1/38 AND request outside an existing dialog THEN dm (NOTE)
33	P-Preferred-Identity	[44]	0	dn/a
34	P-Preferred-Service	[26]	0	IF visited-to-home request on roaming II-NNI AND table 6.1.3.1/77 AND request outside an existing dialog THEN do (NOTE)
35	P-Private-Network-Indication	[84]	0	IF table 6.1.3.1/80 AND request outside an existing dialog THEN do (NOTE)
36	P-Profile-Key	[64]	0	IF table 6.1.3.1/59 AND request outside an existing dialog THEN do (NOTE)
37	P-Served-User	[85]	0	IF visited-to-home request on roaming II-NNI AND request outside an existing dialog being sent from "priviledged sender" THEN dm (NOTE)
38	P-User-Database	[60]	0	dn/a
39	P-Visited-Network-ID	[24]	0	dn/a
40	Privacy	[34]	0	IF dc2 (OIP/OIR: clause 12.3) OR dc3 (ECT: clause 12.13) THEN dm ELSE do
41	Proxy-Authorization	[13], [22]	0	IF table 6.1.3.1/7 THEN do (NOTE)
42	Proxy-Require	[13], [22]	0	do
43	Reason	[48]	0	IF table 6.1.3.1/40 AND request inside an existing dialog THEN do (NOTE)
44	Record-Route	[13], [22]	0	do
45	Refer-Sub	[135]	0	do
	·			

Item	Header field	Ref.	RFC status	II-NNI condition				
46	Refer-To	[22]	dm	dm				
47	Referred-By	[53]	0	IF dc4 (ECT: clause 12.13) THEN dm ELSE do				
48	Reject-Contact	[51]	0	do				
49	Relayed-Charge	[5]	n/a	dn/a				
50	Request-Disposition	[51]	0	do				
51	Require	[13], [22]	С	dc				
52	Resource-Priority	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE)				
53	Route	[13], [22]	С	dc				
54	Security-Client	[47]	0	dn/a				
55	Security-Verify	[47]	0	dn/a				
56	Session-ID	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)				
57	Supported	[13], [22]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE do				
58	Target-Dialog	[140]	0	IF table 6.1.3.1/102 THEN do (NOTE)				
59	Timestamp	[13], [22]	0	do				
60	То	[13], [22]	m	dm				
61	Trigger-Consent	[82]	0	IF table 6.1.3.1/78 THEN do (NOTE)				
62	User-Agent	[13], [22]	0	do				
63	Via	[13], [22]	m	dm				
dc1:				case of ("PN UE redirection" OR "PN access				
	control") AND (non-roaming II-N							
dc2:				R AND "override the default setting" in temporary				
				R (request outside an existing dialog invoked due				
			user identity is	restricted" AND (non-roaming II-NNI OR home-				
	to-visited request on roaming II							
dc3:			ue to ECT inclu	ding Referred-By header field with privacy				
	requested in the "original comm							
dc4:				(non-roaming II-NNI OR loopback traversal				
NOTE	scenario OR home-to-visited request on roaming II-NNI)							
NOTE:				over the II-NNI, the IBCF in the receiving network				
				P message prior to forwarding the SIP message				
	as specified in TS 24.229 [5] clause 5.10.6.2.							

Table B.13.2: Supported header fields within the REFER response

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
1	Accept	415	[13], [22]	С	dc
2	Accept-Encoding	415	[13], [22]	С	dc
3	Accept-Language	415	[13], [22]	С	dc
4	Accept-Resource-Priority	2xx 417	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE 2)
5	Allow	405 others	[13], [22]	m o	dm do
6	Allow-Events	2xx	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE 2)
7	Authentication-Info	2xx	[13], [22]	0	IF table 6.1.3.1/7 THEN do (NOTE 2)
8	Call-ID	100 others	[13], [22]	m	dm
9	Contact	2xx 3xx-6xx	[13], [22]	m o	dm do
10	Content-Disposition	r	[13], [22]	0	do
11	Content-Encoding	r	[13], [22]	0	do
12	Content-Language	r	[13], [22]	0	do
13	Content-Length	100 others	[13], [22]	t	dt
14	Content-Type	r	[13], [22]	*	d*
15	CSeq	100 others	[13], [22]	m	dm
16	Date	100 others	[13], [22]	0	do
17	Error-Info	3xx-6xx	[13], [22]	0	IF table 6.1.3.1/13 THEN do (NOTE 2)
18	Feature-Caps	2xx	[143]	0	IF table 6.1.3.1/103 AND response to request outside an existing dialog THEN do (NOTE 2)
19	From	100 others	[13], [22]	m	dm
20	Geolocation-Error	424 others	[68]	m o	dm do
21	History-Info	r	[25]	0	IF table 6.1.3.1/50 AND response to request outside an existing dialog THEN do (NOTE 2)
22	MIME-version	r	[13], [22]	0	do
23	Organization	r	[13], [22]	0	do
24	P-Access-Network-Info	r	[24], [24A], [24B]	0	IF table 6.1.3.1/36 THEN do (NOTE 2)
25	P-Asserted-Identity	r	[44]	0	IF dc1 (TIP/TIR: clause 12.4) THEN dm ELSE IF table 6.1.3.1/27 AND response to request outside an existing dialog THEN do (NOTE 2)
26	P-Charging-Function- Addresses	r	[24], [24A	0	dn/a
27	P-Charging-Vector	r	[24], [24A]	0	IF dc2 (CONF: clause 12.19) OR (table 6.1.3.1/38 AND response to request outside an existing dialog) THEN dm (NOTE 2)
28	P-Preferred-Identity	r	[44]	0	dn/a
29	Permission-Missing	470	[82]	0	IF table 6.1.3.1/78 THEN do (NOTE 2)
30	Privacy	r	[34]	0	IF dc3 (TIP/TIR: clause 12.4) THEN dm ELSE do
31	Proxy-Authenticate	401 (NOTE 1)	[13], [22]	0	do
		407 (NOTE 1)		m	dm
32	Record-Route	2xx	[13], [22]	0	do
33	Refer-Sub	2xx	[135]	0	IF table 6.1.3.1/98 THEN do (NOTE 2)
34	Relayed-Charge	r	[5]	n/a	dn/a

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition		
35	Require	r	[13], [22]	С	dc		
36	Restoration-Info	504	[5]	n/a	IF table 6.1.3.1/114 AND visited-to- home response on roaming II-NNI THEN do (NOTE 2)		
37	Retry-After	404 413 480 486 500 503 600 603	[13], [22]	0	do		
38	Security-Server	421 494	[47]	0	dn/a		
39	Server	r	[13], [22]	0	do		
40	Session-ID	r	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE 2)		
41	Supported	2xx	[13], [22]	0	do		
42	Timestamp	r	[13], [22]	0	do		
43	То	100 others	[13], [22]	m	dm		
44	Unsupported	420	[13], [22]	0	do		
45	User-Agent	r	[13], [22]	0	do		
46	Via	100 others	[13], [22]	m	dm		
47	Warning	r	[13], [22]	0	do		
48	WWW-Authenticate	401 (NOTE 1)	[13], [22]	m	dm		
		407 (NOTE 1)		0	do		
dc1:	(TIP/TIR AND 2xx response to request outside an existing dialog AND (visited-to-home response on roaming II-NNI OR non-roaming II-NNI)) OR (TIP/TIR AND response to request outside an existing dialog AND "presentation is allowed" AND home-to-visited response on roaming II-NNI) first response from "conference focus" to request outside an existing dialog AND (non-roaming II-NNI OR						
	home-to-visited response	on roaming II-N	INI)				
dc3:	(TIP/TIR AND non-100 response to request outside an existing dialog AND "override the default setting" in temporary mode AND visited-to-home response on roaming II-NNI) OR (TIP/TIR AND 2xx response to request outside an existing dialog AND "presentation of the network asserted identity is restricted" AND (non-roaming II-NNI OR home-to-visited response on roaming II-NNI))						
NOTE 1 NOTE 2	2: If the capability specified in	table 6.1.3.1 i header fields i	s not suppoin the receive	ted over the II	I-NNI, the IBCF in the receiving network ge prior to forwarding the SIP message		

B.14 REGISTER method

As described in table 6.1, the REGISTER method is supported only over the roaming II-NNI.

Table B.14.1: Supported header fields within the REGISTER request

Item	Header field	Ref.	RFC status	II-NNI condition
1	Accept	[13]	0	do
2	Accept-Encoding	[13]	0	do
3	Accept-Language	[13]	0	do
4	Allow	[13]	0	do
5	Allow-Events	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE)
6	Authorization	[13]	0	IF using IMS AKA OR using SIP digest THEN
				dm ELSE do
7	Call-ID	[13]	m	dm
8	Call-Info	[13]	0	do
9	Contact	[13]	0	dm
10	Content-Disposition	[13]	0	do
11	Content-Encoding	[13]	0	do
12	Content-Language	[13]	0	do
13	Content-Length	[13]	t	dt
14	Content-Type	[13]	*	d*
15	CSeq	[13]	m	dm
16	Date	[13]	0	do
17	Expires	[13]	0	do
18	Feature-Caps	[143]	0	IF table 6.1.3.1/103 THEN do (NOTE)
19	From	[13]	m	dm
20	Geolocation	[68]	0	do
21	Geolocation-Routing	[68]	0	do
22	History-Info	[25]	0	IF table 6.1.3.1/50 AND request outside an existing dialog THEN do (NOTE)
23	Max-Breadth	[79]	0	do
24	Max-Breadth Max-Forwards	[13]	m	dm
25	MIME-Version	[13]	0	do
26	Organization	[13]	0	do
27	P-Access-Network-Info	[24], [2	0	IF table 6.1.3.1/36 THEN do (NOTE)
21	1 -Access-Network-IIIIo	4B]	0	ii table 0.1.3.1/30 TTLN do (NOTE)
28	P-Charging-Function- Addresses	[24]	0	dn/a
29	P-Charging-Vector	[24]	0	dm
30	P-User-Database	[60]	0	dn/a
31	P-Visited-Network-ID	[24]	0	dm
32	Path	[43]	0	dm
33	Privacy	[34]	0	dn/a
34	Proxy-Authorization	[13]	0	do
35	Proxy-Require	[13]	0	do
36	Reason	[48]	0	IF table 6.1.3.1/40 THEN do (NOTE)
37	Recv-Info	[39]	0	IF table 6.1.3.1/17 THEN do (NOTE)
38	Referred-By	[53]	0	do
39	Relayed-Charge	[5]	n/a	dn/a
40	Request-Disposition	[51]	0	do
41	Require	[13]	С	dm
42	Resource-Priority	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE)
43	Route	[13]	С	dc
44	Security-Client	[47]	0	dn/a
45	Security-Verify	[47]	0	dn/a
46	Session-ID	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)
47	Supported	[13]	0	dm
48	Timestamp	[13]	0	do
49	То	[13]	m	dm
50	User-Agent	[13]	0	do
51	Via	[13]	m	dm
NOTE				and the HAND the IDOF is the receiving restricted

NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.

Table B.14.2: Supported header fields within the REGISTER response

Item	Header field	SIP	Ref.	RFC status	II-NNI condition
		status code			
1	Accept	2xx	[13]	0	do
		415		С	dc
2	Accept-Encoding	2xx	[13]	0	do
		415		С	dc
3	Accept-Language	2xx	[13]	0	do
		415		С	dc
4	Accept-Resource-Priority	2xx 417	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE)
5	Allow	405	[13]	m	dm
		others		0	do
6	Allow-Events	2xx	[20]	0	IF table 6.1.3.1/23 THEN do (NOTE)
7	Authentication-Info	2xx	[13]	0	do
8	Call-ID	100 others	[13]	m	dm
9	Call-Info	r	[13]	0	do
10	Contact	2xx	[13]	0	dm
		3xx 485		0	do
11	Content-Disposition	r	[13]	0	do
12	Content-Encoding	r	[13]	0	do
13	Content-Language	r	[13]	0	do
14	Content-Length	100 others	[13]	t	dt
15	Content-Type	r	[13]	*	d*
16	CSeq	100 others	[13]	m	dm
17	Date	100 others	[13]	0	do
18	Error-Info	3xx-6xx	[13]	0	IF table 6.1.3.1/13 THEN do (NOTE)
19	Feature-Caps	2xx	[143]	0	IF table 6.1.3.1/103 THEN do (NOTE)
20	Flow-Timer	2xx	[65]	0	do
21	From	100	[13]	m	dm
	1.10	others	[.0]		
22	Geolocation-Error	424	[68]	m	dm
22	Geolocation-Entoi	others	[00]	0	do
23	History-Info	r	[25]	0	IF table 6.1.3.1/50 AND response to request outside an existing dialog THEN do (NOTE)
24	MIME-version	r	[13]	0	do
25	Min-Expires	423	[13]	m	dm
26	Organization	r	[13]	0	do
27	P-Access-Network-Info	r	[24], [2 4A], [2 4B]	0	IF table 6.1.3.1/36 THEN do (NOTE)
28	P-Associated-URI	2xx	[24], [2 4A]	0	dm
29	P-Charging-Function- Addresses	r	[24]	0	dn/a
30	P-Charging-Vector	r	[24], [2 4A]	0	dm
31	Path	2xx	[43]	0	dm
32	Privacy	r	[34]	0	do
33	Proxy-Authenticate	401	[13]	0	do
		407	<u>l</u>	m	dm
34	Relayed-Charge	r	[5]	n/a	dn/a
35	Require	r	[13]	С	dc

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition			
36	Retry-After	404 413 480 486 500 503 600 603	[13]	0	do			
37	Security-Server	2xx 401 421 494	[47]	n/a o	dn/a dn/a			
38	Server	r	[13]	0	do			
39	Service-Route	2xx	[45]	0	dm			
40	Session-ID	r	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)			
41	Supported	2xx	[13]	0	do			
42	Timestamp	r	[13]	0	do			
43	То	100 others	[13]	m	dm			
44	Unsupported	420	[13]	m	dm			
45	User-Agent	r	[13]	0	do			
46	Via	100 others	[13]	m	dm			
47	Warning	r	[13]	0	do			
48	WWW-Authenticate	401	[13]	m	dm			
		407		0	do			
NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.								

B.15 SUBSCRIBE method

As described in table 6.1, the support of SUBSCRIBE method over the non-roaming II-NNI is based on bilateral agreement between the operators.

Table B.15.1: Supported header fields within the SUBSCRIBE request

Item	Header field	Ref.	RFC status	II-NNI condition
1	Accept	[13], [20]	0	do
2	Accept-Contact	[51]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE do
3	Accept-Encoding	[13], [20]	0	do
4	Accept-Language	[13], [20]	0	do
5	Allow	[13], [20]	0	do
6	Allow-Events	[20]	0	do
7	Authorization	[13], [20]	0	IF table 6.1.3.1/7 THEN do (NOTE)
8	Call-ID	[13], [20]	m	dm
9	Call-Info	[13], [20]	0	IF dc2 (CCBS/CCNR/CCNL:
		1,11		clause 12.11/12.12/12.23) THEN dm ELSE dn/a
10	Contact	[13], [20]	m	dm
11	Content-Disposition	[13], [20]	0	do
12	Content-Encoding	[13], [20]	0	do
13	Content-Language	[13], [20]	0	do
14	Content-Length	[13], [20]	t	dt
15	Content-Type	[13], [20]	*	d*
16	CSeq	[13], [20]	m	dm
17	Date	[13], [20]	0	do
18	Event	[20]	m	dm
19	Expires	[13], [20]	0	IF dc2 (CCBS/CCNR/CCNL:
				clause 12.11/12.12/12.23) OR using reg event
				package THEN dm ELSE do
20	Feature-Caps	[143]	0	IF table 6.1.3.1/103 THEN do (NOTE)
21	From	[13], [20]	m	dm
22	Geolocation	[68]	0	do
23	Geolocation-Routing	[68]	0	do
24	History-Info	[25]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE IF
	·			table 6.1.3.1/50 AND initial request THEN do (NOTE)
25	Max-Breadth	[79]	0	dn/a
26	Max-Forwards	[13], [20]	m	dm
27	MIME-Version	[13], [20]	0	do
28	Organization	[13], [20]	0	do
29	P-Access-Network-Info	[24], [24 B]	0	IF table 6.1.3.1/36 THEN do (NOTE)
30	P-Asserted-Identity	[44]	0	IF dc2 (CCBS/CCNR/CCNL:
	,			clause 12.11/12.12/12.23) OR table 6.1.3.1/27 AND initial request THEN dm (NOTE)
31	P-Asserted-Service	[26]	0	IF (non-roaming II-NNI OR home-to-visited
				request on roaming II-NNI) AND
				table 6.1.3.1/77 AND initial request THEN do
				(NOTE)
32	P-Called-Party-ID	[24]	0	IF home-to-visited request on roaming II-NNI AND table 6.1.3.1/34 THEN do (NOTE)
33	P-Charging-Function- Addresses	[24]	0	dn/a
34	P-Charging-Vector	[24]	0	IF table 6.1.3.1/38 AND initial request THEN dm (NOTE)
35	P-Preferred-Identity	[44]	0	dn/a
36	P-Preferred-Service	[26]	0	IF visited-to-home request on roaming II-NNI AND table 6.1.3.1/77 AND initial request THEN do (NOTE)
37	P-Private-Network-Indication	[84]	0	IF table 6.1.3.1/80 AND initial request THEN do (NOTE)
38	P-Profile-Key	[64]	0	IF table 6.1.3.1/59 AND initial request THEN do (NOTE)
39	P-Served-User	[85]	0	IF visited-to-home request on roaming II-NNI AND initial request being sent from "priviledged sender" THEN dm (NOTE)
40	P-User-Database	[60]	0	dn/a
41	P-Visited-Network-ID	[24]	0	dn/a
42	Priority	[13], [20]	0	do
43	Privacy	[34]	0	IF dc3 (OIP/OIR: clause 12.3) THEN dm ELSE
				do

Item	Header field	Ref.	RFC status	II-NNI condition				
44	Proxy-Authorization	[13], [20]	0	IF table 6.1.3.1/7 THEN do (NOTE)				
45	Proxy-Require	[13], [20]	0	do				
46	Reason	[48]	0	IF table 6.1.3.1/40 AND subsequent request				
				THEN do (NOTE)				
47	Record-Route	[13], [20]	0	do				
48	Referred-By	[53]	0	do				
49	Reject-Contact	[51]	0	do				
50	Relayed-Charge	[5]	n/a	dn/a				
51	Request-Disposition	[51]	0	do				
52	Require	[13], [20]	0	do				
53	Resource-Priority	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE)				
54	Route	[13], [20]	С	dc				
55	Security-Client	[47]	0	dn/a				
56	Security-Verify	[47]	0	dn/a				
57	Session-ID	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)				
58	Supported	[13], [20]	0	IF dc1 (PNM: clause 12.17) THEN dm ELSE do				
59	Target-Dialog	[140]	0	IF table 6.1.3.1/102 THEN do (NOTE)				
60	Timestamp	[13], [20]	0	do				
61	То	[13], [20]	m	dm				
62	Trigger-Consent	[82]	0	IF table 6.1.3.1/78 THEN do (NOTE)				
63	User-Agent	[13], [20]	0	do				
64	Via	[13], [20]	m	dm				
dc1:	initial request invoked due to Pl	NM in case	of ("PN UE redi	rection" OR "PN access control") AND (non-				
	roaming II-NNI OR home-to-vis							
dc2:				non-roaming II-NNI) OR ("CC revocation				
	request" due to CCBS/CCNR/C							
dc3:				default setting" in temporary mode AND visited-				
	to-home request on roaming II-NNI) OR (initial request invoked due to OIP/OIR AND "presentation of the							
				OR home-to-visited request on roaming II-NNI))				
NOTE:				over the II-NNI, the IBCF in the receiving network				
				P message prior to forwarding the SIP message				
	as specified in TS 24.229 [5] cla	ause 5.10.6.	.2.					

132

Table B.15.2: Supported header fields within the SUBSCRIBE response

134

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
1	Accept	415	[13], [20]	0	do
2	Accept-Encoding	415	[13], [20]	0	do
3	Accept-Language	415	[13], [20]	0	do
4	Accept-Resource-Priority	2xx 417	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE 2)
5	Allow	405 others	[13], [20]	m o	dm do
6	Allow-Events	2xx 489	[20]	o m	do dm
7	Authentication-Info	2xx	[13], [20]	0	IF table 6.1.3.1/7 THEN do (NOTE 2)
8	Call-ID	100 r	[13], [20]	m	dm
9	Call-Info	r	[13], [20]	0	do
10	Contact	2xx 3xx 485	[13], [20]	m	dn
11	Contant Dianosition		[42] [20]	0	do do
12	Content-Disposition Content-Encoding	r	[13], [20] [13], [20]	0	do
13	Content-Language	r	[13], [20]	0	do
14	Content-Length	100 others	[13], [20]	t	dt
15	Content-Type	r	[13], [20]	*	d*
16	CSeq	100 others	[13], [20]	m	dm
17	Date	100 others	[13], [20]	0	do
18	Error-Info	3xx-6xx	[13], [20]	0	IF table 6.1.3.1/13 THEN do (NOTE 2)
19	Expires	2xx	[13], [20]	m	dm
20	Feature-Caps	2xx	[143]	0	IF table 6.1.3.1/103 THEN do (NOTE 2)
21	From	100 others	[13], [20]	m	dm
22	Geolocation-Error	424 others	[68]	m o	dm do
23	History-Info	r	[25]	0	IF table 6.1.3.1/50 AND response to initial request THEN do (NOTE 2)
24	MIME-version	r	[13], [20]	0	do
25	Min-Expires	423	[13], [20]	m	dm
26	Organization	r	[13], [20]	0	do
27	P-Access-Network-Info	r	[24], [24A], [24B]	0	IF table 6.1.3.1/36 THEN do (NOTE 2)
28	P-Asserted-Identity	r	[44]	0	IF dc1 (TIP/TIR: clause 12.4) THEN dm ELSE IF table 6.1.3.1/27 AND response to initial request THEN do (NOTE 2)
29	P-Charging-Function- Addresses	r	[24], [24A]	0	dn/a
30	P-Charging-Vector	r	[24], [24A]	0	IF table 6.1.3.1/38 AND response to initial request THEN dm (NOTE 2)
31	P-Preferred-Identity	r	[44]	0	dn/a
32	Permission-Missing	470	[82]	0	IF table 6.1.3.1/78 THEN do (NOTE 2)
33	Privacy	r	[34]	0	IF dc2 (TIP/TIR: clause 12.4) THEN dm ELSE do
34	Proxy-Authenticate	401 (NOTE 1)	[13], [20]	0	do
		407 (NOTE 1)		m	dm
35	Record-Route	2xx	[13], [20]	0	do
36	Relayed-Charge	r	[5]	n/a	dn/a
37	Require	r	[13], [20]	0	do

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
38	Restoration-Info	504	[5]	n/a	IF table 6.1.3.1/114 AND visited-to- home response on roaming II-NNI THEN do (NOTE 2)
39	Retry-After	404 413 480 486 500 503 600 603	[13], [20]	0	do
40	Security-Server	421 494	[47]	0	dn/a
41	Server	415 others	[13], [20]	0	do
42	Session-ID	r	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE 2)
43	Supported	2xx	[13], [20]	0	do
44	Timestamp	r	[13], [20]	0	do
45	То	100 others	[13], [20]	m	dm
46	Unsupported	420	[13], [20]	0	do
47	User-Agent	r	[13], [20]	0	do
48	Via	100 others	[13], [20]	m	dm
49	Warning	r	[13], [20]	0	do
50	WWW-Authenticate	401 (NOTE 1)	[13], [20]	m	dm
		407 (NOTE 1)		0	do
dc1:		P/TIR AND respo			response on roaming II-NNI OR non- "presentation is allowed" AND home-t
dc2:	(TIP/TIR AND non-100 re	esponse to initial			e default setting" in temporary mode D 2xx response to initial request AND

dc2: (TIP/TIR AND non-100 response to initial request AND "override the default setting" in temporary mode AND visited-to-home response on roaming II-NNI) OR (TIP/TIR AND 2xx response to initial request AND "presentation of the network asserted identity is restricted" AND (non-roaming II-NNI OR home-to-visited response on roaming II-NNI))

NOTE 1: The SIP status code is only applicable over the roaming II-NNI.

NOTE 2: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.

B.16 UPDATE method

Table B.16.1: Supported header fields within the UPDATE request

Item	Header field	Ref.	RFC status	II-NNI condition
1	Accept	[13], [23]	0	do
2	Accept-Contact	[51]	0	do
3	Accept-Encoding	[13], [23]	0	do
4	Accept-Language	[13], [23]	0	do
5	Allow	[13], [23]	0	do
6	Allow-Events	[20]	n/a	dn/a
7	Authorization	[13], [23]	0	IF table 6.1.3.1/7 THEN do (NOTE)
8	Call-ID	[13], [23]	m	dm
9	Call-Info	[13], [23]	0	do
10	Contact	[13], [23]	m	dm
11	Content-Disposition	[13], [23]	0	do
12	Content-Encoding	[13], [23]	0	do
13	Content-Language	[13], [23]	0	do
14	Content-Length	[13], [23]	t	dt
15	Content-Type	[13], [23]	*	d*
16	CSeq	[13], [23]	m	dm
17	Date	[13], [23]	0	do
18	Feature-Caps	[143]	0	IF table 6.1.3.1/103 THEN do (NOTE)
19	From	[13], [23]	m	dm
20	Geolocation	[68]	0	do
21	Geolocation-Routing	[68]	0	do
22	Max-Breadth	[79]	0	dn/a
23	Max-Forwards	[13], [23]	m	dm
24	MIME-Version	[13], [23]	0	do
25	Min-SE	[52]	0	do
26	Organization	[13], [23]	0	do
27	P-Access-Network-Info	[24], [24	0	IF table 6.1.3.1/36 THEN do (NOTE)
	1 7.00000 FROUNDIN TITLE	B]		11 (45)6 6.1.6.1/66 111214 46 (14612)
28	P-Charging-Function-	[24]	0	dn/a
	Addresses	[]		
29	P-Charging-Vector	[24]	0	IF table 6.1.3.1/38 THEN do (NOTE)
30	P-Early-Media	[74]	0	IF table 6.1.3.1/69 THEN do (NOTE)
31	Privacy	[34]	0	do
32	Proxy-Authorization	[13], [23]	0	IF table 6.1.3.1/7 THEN do (NOTE)
33	Proxy-Require	[13], [23]	0	do
34	Reason	[48]	0	IF table 6.1.3.1/40 THEN do (NOTE)
35	Record-Route	[13], [23]	0	do
36	Recv-Info	[39]	0	IF table 6.1.3.1/17 THEN do (NOTE)
37	Referred-By	[53]	0	do
38	Reject-Contact	[51]	0	do
39	Relayed-Charge	[5]	n/a	dn/a
40	Request-Disposition	[51]	0	do
41	Require	[13], [23]	С	dc
42	Resource-Priority	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE)
43	Route	[13], [23]	С	dc
44	Security-Client	[47]	0	dn/a
45	Security-Verify	[47]	0	dn/a
46	Session-Expires	[52]	0	do
47	Session-ID	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE)
48	Supported	[13], [23]	0	do
49	Timestamp	[13], [23]	0	do
50	То	[13], [23]	m	dm
51	User-Agent	[13], [23]	0	do
52	Via	[13], [23]	m	dm
NOTE:	1	· · ·], [<u>- · ·]</u>	L	1

NOTE: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.

Table B.16.2: Supported header fields within the UPDATE response

Item	Header field	SIP	Ref.	RFC	II-NNI condition
		status code		status	
1	Accept	2xx	[13], [23]	0	do
		415		С	dc
2	Accept-Encoding	2xx	[13], [23]	0	do
		415		С	dc
3	Accept-Language	2xx	[13], [23]	0	do
4	Assert Deserves Drierite	415	[70]	С	dc
4	Accept-Resource-Priority	2xx 417	[78]	0	IF table 6.1.3.1/73 THEN do (NOTE 2)
5	Allow	405	[13], [23]	m	dm
		others		0	do
6	Allow-Events	2xx	[20]	n/a	dn/a
7	Authentication-Info	2xx	[13], [23]	0	IF table 6.1.3.1/7 THEN do (NOTE 2)
8	Call-ID	100 others	[13], [23]	m	dm
9	Call-Info	r	[13], [23]	0	do
10	Contact	2xx	[13], [23]	m	dm
		3xx 485		0	do
		others		0	do
11	Content-Disposition	r	[13], [23]	0	do
12	Content-Encoding	r	[13], [23]	0	do
13	Content-Language	r	[13], [23]	0	do
14	Content-Length	100 others	[13], [23]	t	dt
15	Content-Type	r	[13], [23]	*	d*
16	CSeq	100 others	[13], [23]	m	dm
17	Date	100 others	[13], [23]	0	do
18	Error-Info	3xx-6xx	[13], [23]	0	IF table 6.1.3.1/13 THEN do (NOTE 2)
19	Feature-Caps	2xx	[143]	0	IF table 6.1.3.1/103 THEN do (NOTE 2)
20	From	100 others	[13], [23]	m	dm
21	Geolocation-Error	424	[68]	m	dm
		others	1	0	do
22	MIME-version	r	[13], [23]	0	do
23	Min-SE	422	[52]	m	dm
24	Organization	r	[13], [23]	0	do
25	P-Access-Network-Info	r	[24], [24A], [24B]	0	IF table 6.1.3.1/36 THEN do (NOTE 2)
26	P-Charging-Function- Addresses	r	[24], [24A	0	dn/a
27	P-Charging-Vector	r	[24], [24A	0	IF table 6.1.3.1/38 THEN do (NOTE 2)
28	P-Early-Media	2xx	[74]	0	IF table 6.1.3.1/69 THEN do (NOTE 2)
29	Privacy	r	[34]	0	do
30	Proxy-Authenticate	401 (NOTE 1)	[13], [23]	0	do
		407 (NOTE 1)		m	dm
31	Recv-Info	2xx	[39]	С	IF table 6.1.3.1/17 THEN dc (NOTE 2)
		others		0	IF table 6.1.3.1/17 THEN do (NOTE 2)
32	Relayed-Charge	r	[5]	n/a	dn/a
33	Require	r	[13], [23]	С	dc

Item	Header field	SIP status code	Ref.	RFC status	II-NNI condition
34	Retry-After	404 413 480 486 500 503 600 603	[13], [23]	0	do
35	Security-Server	421 494	[47]	0	dn/a
36	Server	r	[13], [23]	0	do
37	Session-Expires	2xx	[52]	0	do
38	Session-ID	r	[124]	m	IF table 6.1.3.1/94 THEN dm (NOTE 2)
39	Supported	2xx	[13], [23]	0	do
40	Timestamp	r	[13], [23]	0	do
41	То	100 others	[13], [23]	m	dm
42	Unsupported	420	[13], [23]	m	dm
43	User-Agent	r	[13], [23]	0	do
44	Via	100 others	[13], [23]	m	dm
45	Warning	r	[13], [23]	0	do
46	WWW-Authenticate	401 (NOTE 1)	[13], [23]	m	dm
		407 (NOTE 1)		0	do

NOTE 1: The SIP status code is only applicable over the roaming II-NNI.

NOTE 2: If the capability specified in table 6.1.3.1 is not supported over the II-NNI, the IBCF in the receiving network can omit or modify the SIP header fields in the received SIP message prior to forwarding the SIP message as specified in TS 24.229 [5] clause 5.10.6.2.

Annex C (informative): The list of option items for II-NNI

C.1 Scope

This annex provides a list of items that are recommended to be selected by inter-operator agreements for the interconnection between IMS operators using the II-NNI. The items in this annex have an influence on the service interconnection.

For the purposes of this annex, these items are called "option items". The option items are extracted from the present document other than this annex, and are categorized from the aspect of service provisioning by IMS operators.

If an option item is used based on inter-operator agreements, then relating capabilities described in the references are used over the II-NNI. In case of misalignment between the normative part of the present document and this annex, the normative part of the present document takes precedence.

C.2 Format of option item table

The format of option item table used in the subsequent clauses is as follows:

- The 2nd column "Option item" shows the option item.
- The 3rd column "References" shows the relevant clauses of the present document for each option item.
- The 4th column "Applicability at the II-NNI" shows the selectable patterns for each option item.
- The 5th column "Details for operator choice" shows the details for the inter-operator agreements in case the corresponding pattern is chosen. This column intends to be used to exchange each detailed conditions of the II-NNI by means of filling the conditions in the columns corresponding to the selected pattern. Blank row intends to be used as a place holder for describing additional detailed II-NNI conditions specific to the operator network not associated with the explicit descriptions in this annex.

C.3 Option item table

C.3.0 Supported II-NNI traversal scenarios

Table C.3.0.1: Supported II-NNI traversal scenarios

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Roaming II-NNI support	entire present specification	Yes	Option items in clauses C.3.1 and C.3.2. Applicability of "Roaming Architecture for Voice over IMS with
				Local Breakout" (Clause 19).
				If "Roaming Architecture for Voice over IMS with Local Breakout" is applicable:
			No	
2	Non-roaming II-NNI support	entire present specification	Yes	Option items in clauses C.3.1 and C.3.3.
			No	

C.3.1 Option item table common to roaming, non-roaming II-NNI and loopback traversal scenario

This clause describes the option item tables common to the roaming II-NNI, the loopback traversal scenario, and the non-roaming II-NNI.

Table C.3.1.1: SIP method (Common)

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	INFO method	table 6.1/5A table 6.1/5B	Yes	Info package name to use.
			No	
2	MESSAGE method	table 6.1/9A table 6.1/9B	Yes	Inside or outside existing dialog, and content of MESSAGE request.
			No	
3	REFER method	table 6.1/16 table 6.1/17	Yes	Inside or outside existing dialog.
			No	

Table C.3.1.1A: SIP overload control

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	SIP overload control	table 6.1.3.1/106 clause 21.1	Yes	Mechanisms to be used. Whether to exempt MPS from SIP overload controls.
			No	
2	Feedback control	table 6.1.3.1/107 clause 21.2	Yes	Algorithm to be used if not default (see clause 21.2).
			No	1
3	Event control	table 6.1.3.1/108 clause 21.3	Yes	Addresses to targets that can be supervised.
			No	

Table C.3.1.2: Negotiation of resource reservation

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Negotiation of resource reservation	table 6.1.3.1/20	Yes	
	(precondition)		No	

Table C.3.1.2A: Periodic refresh of SIP sessions

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	SIP session timer (timer)	table 6.1.3.1/45	Yes	Use conditions (Possible restriction on range of times and whether SIP session timer is applied in all sessions).

Table C.3.1.3: Replacing of SIP dialogs

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Replacing of SIP dialogs	table 6.1.3.1/47	Yes	
	(replaces)		No	

Table C.3.1.4: Session participation

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Session participation	table 6.1.3.1/48	Yes	
	(ioin)		No	

Table C.3.1.5: Conveying capabilities of UE

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Conveying capabilities of UE	table 6.1.3.1/49	Yes	
			No	

Table C.3.1.5A: Authorization of early media

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Authorization of early media	table 6.1.3.1/69	Yes	
			No	

Table C.3.1.6: Asserting the service of authenticated users

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Managing the indication of the asserted service (P-Asserted-Service header field)	table 6.1.3.1/77	Yes	Service identifier values to use.
			No	

Table C.3.1.7: Mode of signalling

No.	Option item		References	Applicability at the II-NNI	Details for operator choice
1	Overlap	In-dialog	clause 6.1.1.5	Yes	
	signalling	method		No	
		Multiple-INVITE		Yes	
		method		No	

Table C.3.1.7A: SIP message bodies

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	MIME type	clause 6.1.4	Yes	MIME types to use. Applicable characteristics of the SIP message body MIMEs (i.e. the value(s) of Content-Disposition header field and Content-Language header field) if necessary.

Table C.3.1.7B: SIP message body size

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Limitation on maximum length of a SIP message body	clause 6.1.4	Yes	Maximum length accepted.
			No	

Table C.3.1.8: Control Plane Transport

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	TCP	clause 6.2	Yes	Use conditions (e.g. port number to accept, number of simultaneous connections in case of reuse of the existing connections).
			No	
2	UDP	clause 6.2	Yes	Use conditions (e.g. port number to accept).
			No	
3	SCTP	clause 6.2	Yes	Use conditions (e.g. port number to accept).
			No	

Table C.3.1.9: User Plane Transport, Media, and codec

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Speech media (m=audio)	clause 7.1	Yes	Names of speech codecs to use. (NOTE 1, NOTE 2)
2	Video media (m=video)	clause 7.1	Yes	Names of video codecs to use. (NOTE 1, NOTE 2)
			No	
3	Other media	clause 7.1	Yes	Media type (m=line of SDP) to use (e.g. application, image, message).
			No	-
4	RTP/AVPF	clause 7.2	Yes	Media type (m=line of SDP) that uses the protocol.
			No	
5	Transmission Control Protocol	clause 6.1.2.1 clause 7.2	Yes	Media type (m=line of SDP) that uses the protocol.
			No	1
6	Other user plane protocols	clause 7.2	Yes	Protocols to use (e.g. udptl, TCP/MSRP) and media types (m=line of SDP) that describe the protocols.
			No	

NOTE 1: Codecs which are included in the applicable codec list made by inter-operator agreements are guaranteed to be supported at the II-NNI by the peer operators.

NOTE 2: Whether it is allowed to offer codecs which are not included in the applicable codec list made by inter-operator agreements over the II-NNI is also determined by the inter-operator agreement if necessary.

Table C.3.1.10: Dual Tone Multi Frequency (DTMF)

No.	Option item		References	Applicability at the II-NNI	Details for operator choice
1	DTMF transport	"telephone-	clause 7.1 table 6.1/5A	Yes	
		event" based DTMF transport	table 6.1/5B	No	
		The SIP INFO	clause 12.14	Yes	
		mechanism	clause 12.15	No	

Table C.3.1.10A: Numbering, Naming and Addressing (Common)

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Subaddress	clause 8.1	Yes	
	("isub" tel URI parameter)		No	

Table C.3.1.11: IP Version

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	IPv4	clause 9	Yes	Use conditions (e.g. for control plane, for user plane).
			No	
2	IPv6	clause 9	Yes	Use conditions (e.g. for control plane, for user plane).
			No	

Table C.3.1.12: Supplementary services (Common)

No.	Option		References	Applicability at the II-NNI	Details for operator choice
1	Malicious Commur IDentification (MCII		clause 12.2	Yes	Minimum information exchanged over the II-NNI.
				No	
2	Originating Identific	cation	clause 12.3	Yes	
	Presentation (OIP) Identification Restr	and Originating		No	
3	Terminating Identif	ication	clause 12.4	Yes	
	Presentation (TIP) Identification Restr	and Terminating		No	
4	Anonymous Comm		clause 12.5	Yes	
•	Rejection (ACR)			No	
5	Communication DI	Version (CDIV)	clause 12.6	Yes	
				No	
6	Communication Wa	aiting (CW)	clause 12.7	Yes	
7	Communication HC	OLD (HOLD)	clause 12.8	No Yes	
′	Communication HC	JLD (HOLD)	clause 12.6	No	
8	Message Waiting I	ndication (MWI)	clause 12.9	Yes	
Ü	Woodago Walling II	naidation (iiii)	0.0000 12.0	No	
9	Incoming Commun	ication Barring	clause 12.10.1	Yes	
	(ICB)	_		No	
10	Completion of Com		clause 12.11	Yes	
	Busy Subscriber (C			No	
11	Completion of Com	nmunications by	clause 12.12	Yes	
12	No Reply (CCNR) Explicit Communication	ation Transfer	clause 12.13	No Yes	Type of explicit communication
	(ECT)				transfer to support.
40	0 (' 141 ('	T (0.4.T)	10.44	No	
13	Customized Alertin	ig Ione (CAI)	clause 12.14	Yes	CAT model to use (Gateway model, forking model and early session model).
				No	
14	Customized Ringin	g Signal (CRS)	clause 12.15	Yes	
				No	
15	Closed User Group	(CUG)	clause 12.16	Yes	
16	Personal Network	Managamant	clause 12.17	No Yes	
16	(PNM)	wanagement	Clause 12.17	No	
17	Three-Party (3PTY	7	clause 12.18	Yes	
		,	0.0000 12.10	No	
18	Conference (CONF	=)	clause 12.19	Yes	
				No	
19	Flexible Alerting (F	A)	clause 12.20	Yes	
		D : 4	1 10 01 0	No	NA cl. 1 C P
20		During the establishment of a session	clause 12.21.2	Yes	Methods for sending announcement.
				No	
		During an established communication	clause 12.21.3	Yes	Methods for sending announcement.
		session		No	
		Providing announcements when	clause 12.21.4	Yes	Methods for sending announcement.
		communication request is rejected		No	

No.	Optio	n item	References	Applicability at the II-NNI	Details for operator choice
21	Advice of Charge	(AOC)	clause 12.22	Yes	
				No	
22	Completion of Co	mmunications on	clause 12.23	Yes	
	Not Logged-in (C	CNL)		No	
23	Presence service		clause 15	Yes	Presence services to use (TS 24.141 [132], OMA 1.1 [142] or OMA 2.0 [138]).
				No	
24	Messaging service	Page-mode clause 16.2	Yes		
		messaging		No	
		Session-mode	clause 16.4	Yes	
		messaging		No	
		Session-mode		Yes	
		messaging conferences		No	
24A	Delivery of original destination identity		clause 22	Yes	Services to apply the function.
				No	
25	Other additional service using other SIP extensions		clause 6.1.1.3.2 clause 12.6	Yes	The SIP extensions to use and the service that uses the extensions.
				No	

Table C.3.1.13: Additional functions (Common)

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Optimal Media Routeing	clause 17	Yes	
			No	
2	Applying forking (NOTE 1)	table 6.1.3.1/5	Yes	Usage of Request-Disposition header field with value "no-fork". (NOTE 3)
			No (NOTE 2)	
3	Transfer of IP multimedia service tariff information	clause 11.3	Yes	The value of the Content- Disposition header field.
			No	
4	Telepresence using IMS	clause 23	Yes	The value of "+sip.clue" media feature tag in Contact header field.
			No	

NOTE 1: Support of handling of forked responses and of the SIP Request-Disposition header field, is mandated on the II-NNI. NOTE 2: In case the operator interconnects with IMS non-compliant networks, and wishes to use the II-NNI anyway, then the operators might want to negotiate if the forking procedures are applicable.

NOTE 3: The Request-Disposition header field with value "no-fork" can be used to suppress that forking occurs. However, a peer operator might require the usage of forking e.g. to implement certain services.

Table C.3.1.14: SDP lines

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	m=line	clause 6.1.2	Yes	Used static RTP payload type numbers.
2	b=line	clause 6.1.2	Yes	Used bandwidth modifier types.
3	a=line	clause 6.1.2	Yes	Used attributes. For the "rtpmap" attribute, used "encoding names".

Table C.3.1.15: Emergency services

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Public Safety Answering Point (PSAP) Callback	table 6.1.3.1/110	Yes	Used PSAP call indicator.
			No	

Table C.3.1.16: Indicating the II-NNI traversal scenario

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Support of the "iotl" SIP URI	table 6.1.3.1/112 clause 5.3	Yes	
	parameter indicating the II-NNI traversal scenario		No	

C.3.2 Option item table specific to roaming II-NNI

This clause describes the option item tables specific to roaming II-NNI.

Table C.3.2.1: Mechanism for authentication

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	IMS AKA plus Ipsec ESP	table 6.1.3.1/7	Yes	
			No	
2	SIP digest plus check of IP	table 6.1.3.1/7	Yes	
	association		No	
3	SIP digest plus Proxy	table 6.1.3.1/7	Yes	
	Authentication		No	
4	SIP digest with TLS	table 6.1.3.1/7	Yes	
			No	

Table C.3.2.1A: Charging (roaming II-NNI)

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Inter-operator accounting	table 6.1.3.1/38 clause 11.2	Yes	Operator network identifiers populated in the type 1 "orig-ioi" and "term-ioi" header field parameters of the P-Charging-Vector header field.
2	Inter-operator accounting for the transit scenario	clause 11.2	Yes	Operator network identifiers populated in the "transit-ioi" header field parameters of the P-Charging-Vector header field.
			No	

Table C.3.2.2: The key of service profile for HSS query

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	The key of service profile for HSS	table 6.1.3.1/59	Yes	
	query (P-Profile-Key header field)		No	

Table C.3.2.3: Numbering, Naming and Addressing (roaming II-NNI)

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Dial string	table 6.1.3.1/67	Yes	
	("user=dialstring" SIP URI parameter)		No	
2	Barring of premium numbers	clause 8.1,	Yes	
	("premium-rate" tel URI parameter)	clause 24	No	

Table C.3.2.4: Supplementary services (roaming II-NNI)

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Outgoing Communication Barring	clause 12.10.2	Yes	
	(OCB)		No	
2	Unstructured Supplementary	clause 12.24	Yes	
	Service Data		No	

Table C.3.2.5: Access transfer services (roaming II-NNI)

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	IMS Centralized Services (ICS)	clause 13	Yes	
			No	
2	PS to CS Single Radio Voice Call Continuity (SRVCC)	clause 14	Yes	Additional use conditions (PS to CS SRVCC for calls in alerting phase, support of ATCF architecture, PS to CS SRVCC for calls in pre-alerting phase and PS to CS SRVCC with the MSC server assisted mid-call feature). If the ATCF architecture applies, the URIs of SCC ASs authorised to provide PS to CS SRVCC information in the MESSAGE request.
			No	
3	Single Radio Video Call Continuity (vSRVCC)	clause 14	Yes	Additional use condition (transfer in alerting phase).
			No	
4	Inter UE Transfer (IUT)	clause 18	Yes	
			No	
5	CS to PS Single Radio Voice Call Continuity (SRVCC)	clause 14.5	Yes	The URIs of SCC ASs authorised to provide CS to PS SRVCC information in the MESSAGE request. Additional use conditions (support of CS to PS SRVCC for calls in alerting phase and support of CS to PS SRVCC with the assisted midcall feature).
6	PS to CS Dual Radio Voice Call	clause 14.6	Yes	Additional use conditions (PS to CS
	Continuity (DRVCC)	5.0000 1 7.0		DRVCC for calls in alerting phase, PS to CS DRVCC for originating calls in pre-alerting phase, PS to CS DRVCC with the MSC server assisted mid-call feature and the use of IMS Centralized Services (ICS) and the tel URI in STN).
	00 + 00 0 + 0 11 11 11 11 11 11	1 44-	No	A LEG TO THE TOTAL
7	CS to PS Dual Radio Voice Call Continuity (DRVCC)	clause 14.7	Yes	Additional use conditions (CS to PS DRVCC for calls in alerting phase, CS to PS DRVCC for originating calls in pre-alerting phase, CS to PS DRVCC with the MSC server assisted mid-call feature) and the use of IMS Centralized Services (ICS).
			No	

Table C.3.2.6: Registration of bulk number contacts (roaming II-NNI)

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Registration of bulk number	table 6.1.3.1/104	Yes	
	contacts		No	

Table C.3.2.7: P-CSCF restoration (roaming II-NNI)

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	PCRF based P-CSCF restoration	clause 25.2	Yes	
			No	
2	HSS based P-CSCF restoration	clause 25.3	Yes	
			No	

C.3.3 Option item table specific to non-roaming II-NNI and loopback traversal scenario

This clause describes the option item tables specific to the non-roaming II-NNI and the loopback traversal scenario.

Table C.3.3.1: SIP method (non-roaming II-NNI and loopback traversal scenario)

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	NOTIFY method	table 6.1/10 table 6.1/11	Yes	Event package name to use.
			No	
2	SUBSCRIBE method	table 6.1/20 table 6.1/21	Yes	Event package name to use.
			No	
3	PUBLISH method	table 6.1/15A table 6.1/15B	Yes	Event package name to use.
			No	

Table C.3.3.2: Charging (non-roaming II-NNI and loopback traversal scenario)

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Inter-operator accounting	table 6.1.3.1/38 clause 11.2	Yes	Operator network identifiers populated in the type 2 "orig-ioi" and "term-ioi" header field parameters of the P-Charging-Vector header field.
			No	
2	Inter-operator accounting for the transit scenario	clause 11.2	Yes	Operator network identifiers populated in the "transit-ioi" header field parameters of the P-Charging-Vector header field.
			No	

Table C.3.3.3: Globally Routable User Agent URIs

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Globally Routable User Agent URIs	table 6.1.3.1/56	Yes	
	(gruu)		No	

Table C.3.3.4: Media feature tags

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Media feature tags	table 6.1.3.1/76 clause 12 clause 13 clause 14	Yes	Names of media feature tags to use.
		clause 16 clause 18	No	

Table C.3.3.5: ISDN interworking

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	User to User Call Control	table 6.1.3.1/79	Yes	
	Information in SIP for ISDN Interworking (uui)		No	

Table C.3.3.6: Corporate network

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Private network traffic (P-Private-Network-Indication	table 6.1.3.1/80	Yes	
	header field)		No	

Table C.3.3.7: Numbering, Naming and Addressing (non-roaming II-NNI and loopback traversal scenario)

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
0	SIP URI	clause 8.1	Yes	Any non-global numbers that are allowed in addition to global numbers.
				Domain name(s) and/or IP address(es) of hostportion to accept.
0A	tel URI (NOTE)	clause 8.1	Yes	Any non-global numbers that are allowed in addition to global numbers.
				Applicability of the URI in P- Asserted-Identity header field and/or Request-URI.
			No	
0B	IM URI	clause 8.1	Yes	
			No	
0C	PRES URI	clause 8.1	Yes	
			No	
1	Number Portability Routing Number	clause 8.1	Yes	
	("rn" and "npdi" tel URI parameters)		No	
2	Calling Party's Category ("cpc" tel URI parameter)	clause 8.1	Yes	cpc-values to use.
			No	
3	Originating Line Information ("oli" tel URI parameter)	clause 8.1	Yes	oli-values to use.
			No	
NOTE	: The option item is only for the non	-roaming II-NNI.	•	•

Table C.3.3.8: Additional functions (non-roaming II-NNI and loopback traversal scenario)

No.	Option item	References	Applicability at the II-NNI	Details for operator choice
1	Support of out-of-dialog OPTIONS method	table 6.1/12 table 6.1/13	Yes	The purpose of the method.
			No	

Annex D: Change history

					Change history		
Date	TSG#	TSG Doc.	CR	Rev	Subject/Comment	Old	New
06/2013	TSG#60	CP-130338	0543	1	Clarification on the II-NNI requirements for inter-operator accounting	11.7.0	12.0.0
06/2013	TSG#60	CP-130338	0546	1	Delivery of original destination identity	11.7.0	12.0.0
06/2013	TSG#60	CP-130345	0549	1	Missing reference for media stream with TCP in the option item table	11.7.0	12.0.0
06/2013	TSG#60	CP-130336	0551	2	Suppression of codec transcoding between different operators networks	11.7.0	12.0.0
06/2013	TSG#60	CP-130339	0559	1	Callback for emergency call	11.7.0	12.0.0
06/2013	TSG#60	CP-130337	0560	1	PS to CS SRVCC for originating calls in pre-alerting phase	11.7.0	12.0.0
06/2013	TSG#60	CP-130340	0561	2	PS to CS Dual Radio II-NNI requirements	11.7.0	12.0.0
06/2013	TSG#60	CP-130340	0562	2	CS to PS Dual Radio II-NNI requirements	11.7.0	12.0.0
09/2013	TSG#61	CP-130544	0566		Reference update of draft-vanelburg-dispatch-private- network-ind	12.0.0	12.1.0
09/2013	TSG#61	CP-130547	0569		Clarification of operator agreements for SIP message body MIMEs	12.0.0	12.1.0
09/2013	TSG#61	CP-130562	0570	1	Clarification of supporting the "early-session" extension for the CAT service implementing early session model	12.0.0	12.1.0
09/2013	TSG#61	CP-130555	0575	1	Correction of reference item for preconditions	12.0.0	12.1.0
09/2013	TSG#61	CP-130556	0576	1	PSAP call back support	12.0.0	12.1.0
09/2013	TSG#61	CP-130555	0577	1	Protocol enhancement for IPXS	12.0.0	12.1.0
09/2013	TSG#61	CP-130547	0580	3	Transfer of IP Multimedia Service Tariff Information	12.0.0	12.1.0
09/2013	TSG#61	CP-130547	0583	1	Feature-capabilities in target refresh	12.0.0	12.1.0
09/2013	TSG#61	CP-130556	0584	1	Update of reference to the draft-ietf-ecrit-psap-callback	12.0.0	12.1.0
09/2013	TSG#61	CP-130544	0588	2	draft-avasarala-dispatch-comm-div-notification ref update	12.0.0	12.1.0
09/2013	TSG#61	CP-130554	0591	1	Priority Consideration for SIP Overload Control across II-NNI	12.0.0	12.1.0
12/2013	TSG#62	CP-130701	0574	2	Major capabilities of NOTIFY	12.1.0	12.2.0
12/2013	TSG#62	CP-130666	0596		Reference update of draft-vanelburg-dispatch-private- network-ind	12.1.0	12.2.0
12/2013	TSG#62	CP-130666	0600		Reference update: draft-kaplan-insipid-session-id	12.1.0	12.2.0
12/2013	TSG#62	CP-130683	0602	2	Reference update: draft-ietf-soc-overload-control, draft- ietf-soc-overload-rate-control and draft-ietf-soc-load- control-event-package	12.1.0	12.2.0
12/2013	TSG#62	CP-130684	0604		Correcting table number	12.1.0	12.2.0
12/2013	TSG#62	CP-130679	0606	2	tel URI support in the loopback scenario	12.1.0	12.2.0
12/2013	TSG#62	CP-130695	0609	3	Updating RFC 3265 to RFC 6665	12.1.0	12.2.0
12/2013	TSG#62	CP-130666	0613	1	Reference Update: draft-ietf-salud-alert-info-urns	12.1.0	12.2.0
12/2013	TSG#62	CP-130695	0614	1	Usage of IETF RFC 3515	12.1.0	12.2.0
12/2013	TSG#62	CP-130695	0615	1	Usage of IETF RFC 5875	12.1.0	12.2.0
12/2013	TSG#62	CP-130696	0616		Reference update: draft-ietf-ecrit-psap-callback	12.1.0	12.2.0
12/2013	TSG#62	CP-130697	0617		Correcting DRVCC abbreviation	12.1.0	12.2.0
12/2013	TSG#62	CP-130698	0618	3	g.3gpp.ps2cs-srvcc-orig-pre-alerting in 2xx response	12.1.0	12.2.0
12/2013	TSG#62	CP-130700	0619	2	g.3gpp.srvcc-alerting in 1xx and 2xx responses	12.1.0	12.2.0
03/2014	TSG#63	CP-140064	0622	1	Reference update of draft-vanelburg-dispatch-private- network-ind	12.2.0	12.3.0
03/2014	TSG#63	CP-140068	0624	1	Notation codes for the dynamic view table	12.2.0	12.3.0

03/2014	TSG#63	CP-140079	0626	1	Explaining 1xx, 18x and 2xx-6xx responses	12.2.0	12.3.0
03/2014	TSG#63	CP-140091	0625	2	Addition of figure showing two types of II-NNI	12.2.0	12.3.0
06/2014	TSG#64	CP-140358	0632	-	Correcting the indication of communication diversion to the diverting user	12.3.0	12.4.0
06/2014	TSG#64	CP-140359	0652	-	Removal of CDIVN	12.3.0	12.4.0
06/2014	TSG#64	CP-140360	0646	1	Reference update of draft-vanelburg-dispatch-private- network-ind	12.3.0	12.4.0
06/2014	TSG#64	CP-140368	0659	1	Correction of the option item table format	12.3.0	12.4.0
06/2014	TSG#64	CP-140369	0639	1	Removing IPXS abbreviation	12.3.0	12.4.0
06/2014	TSG#64	CP-140375	0657	2	Reference update for overload control	12.3.0	12.4.0
06/2014	TSG#64	CP-140379	0633	1	SIP timer table update due to RFC 6026	12.3.0	12.4.0
06/2014	TSG#64	CP-140380	0653	-	Reference update: RFC 7090 (draft-ietf-ecrit-psap-callback)	12.3.0	12.4.0
06/2014	TSG#64	CP-140382	0654	3	Identifying the II-NNI traversal scenario	12.3.0	12.4.0
06/2014	TSG#64	CP-140384	0635	1	Correcting errors - DRVCC	12.3.0	12.4.0
06/2014	TSG#64	CP-140384	0634	2	MSC server enhanced for dual radio	12.3.0	12.4.0
06/2014	TSG#64	CP-140399	0636	-	PS to PS access transfer	12.3.0	12.4.0
06/2014	TSG#64	CP-140399	0640	-	Reference text to table A.2 clarified	12.3.0	12.4.0
06/2014	TSG#64	CP-140399	0641	1	RAVEL improvements and corrections	12.3.0	12.4.0
06/2014	TSG#64	CP-140399	0642	1	Served network changed to serving network	12.3.0	12.4.0
06/2014	TSG#64	CP-140399	0637	2	Correcting references	12.3.0	12.4.0
06/2014	TSG#64	CP-140399	0638	2	Assured explicit communication transfer	12.3.0	12.4.0
06/2014	TSG#64	CP-140399	0647	3	Improvement on the format of option item tables	12.3.0	12.4.0
09/2014	CT-65	CP-140534	00675	3	Telepresence support in II-NNI interface	12.4.0	12.5.0
09/2014	CT-65	CP-140535	00674	-	Correcting major capability table reference errors	12.4.0	12.5.0
09/2014	CT-65	CP-140536	00671	-	Trust domain and the "iotl" SIP URI parameter	12.4.0	12.5.0
09/2014	CT-65	CP-140536	00669	2	Reference update: draft-holmberg-dispatch-iotl	12.4.0	12.5.0
09/2014	CT-65	CP-140536	00670	3	Updating major capability and option item table for the "iotl" SIP URI parameter	12.4.0	12.5.0
09/2014	CT-65	CP-140539	00672	1	Premium rate numbers	12.4.0	12.5.0
09/2014	CT-65	CP-140543	00665	1	Introducing a new RFC for History-Info header field	12.4.0	12.5.0
09/2014	CT-65	CP-140543	00666	1	Clarification on History-Info header field of dynamic view tables	12.4.0	12.5.0
09/2014	CT-65	CP-140552	00667	-	A correction regarding P-Private-Network-Indication	12.4.0	12.5.0
09/2014	CT-65	CP-140552	00673	1	Correcting minor errors in C.3.1	12.4.0	12.5.0
12/2014	CT-66	CP-140895	00678		Correction of OCB option item	12.5.0	12.6.0
12/2014	CT-66	CP-140903	00682	1	Replacing draft-kaplan-insipid-session-id with draft-ietf-insipid-session-id	12.5.0	12.6.0
12/2014	CT-66	CP-140905	00683	1	Correcting the column name in the table 6.2	12.5.0	12.6.0
12/2014	CT-66	CP-140918	00685		Adding missing abbreviation	12.5.0	12.6.0
12/2014	CT-66	CP-140918	00686		TRF missing in overview	12.5.0	12.6.0
12/2014	CT-66	CP-140918	00687		Handling of a 380 (Alternative service) response	12.5.0	12.6.0
12/2014	CT-66	CP-140918	00688		Minor corrections and clarifications	12.5.0	12.6.0
12/2014	CT-66	CP-140918	00689	1	Correcting clause 12.1	12.5.0	12.6.0
12/2014	CT-66	CP-140918	00690	2	Reference to TR 29.949	12.5.0	12.6.0
12/2014	CT-66	CP-140891	00694	1	Reference update from draft-vanelburg-dispatch-private- network-ind to RFC 7316	12.5.0	12.6.0
12/2014	CT-66	CP-140918	00695	1	Incorrect reference numbers	12.5.0	12.6.0
12/2014	CT-66	CP-140918	00695	1	Incorrect reference numbers	12.5.0	12.6.0

12/2014	CT-66	CP-140913	0696	3		dification regarding the description of Reason header d parameter	12.5.0	12.6.0
12/2014	CT-66	CP-140914	0697	4	Re	Restoration Information delivery on II-NNI 12.5.0		
12/2014	CT-66	CP-140896	0699	1	Re	Reference Update: RFC7315 12.5.0		12.6.0
12/2014	CT-66	CP-140918	0700	1	Inc	omplete reference	12.5.0	12.6.0
12/2014	CT-66	CP-140901	0702		Re	ference update: SIP overload control	12.5.0	12.6.0
12/2014	CT-66	CP-140905	0703		Re	Reference update: draft-holmberg-dispatch-iotl 12.6		12.6.0
12/2014	CT-66	CP-140918	0705	2	Cla	rifying Reason header fields	12.5.0	12.6.0
12/2014	CT-66	CP-140920	0707	2		rrection of reference about "Emergency services" in nex C.3.1	12.5.0	12.6.0
12/2014	CT-66	CP-140920	0708	2	Inc	omplete sentence	12.5.0	12.6.0
03/2015	CT-67	CP-150098	0712	2		rification on the II-NNI requirement for CDIV regarding vacy header field	12.6.0	12.7.0
03/2015	CT-67	CP-150108	0713	1	Ad	dition of "mp" header field parameter into CDIV section	12.6.0	12.7.0
03/2015	CT-67	CP-150098	0717	1	par	rification on the II-NNI requirement regarding cause- am URI parameter	12.6.0	12.7.0
03/2015	CT-67	CP-150107	0720	1	_	ference update: draft-ietf-mmusic-sctp-sdp	12.6.0	12.7.0
03/2015	CT-67	CP-150108	0721			ference update: draft-holmberg-sipcore-received-realm	12.6.0	12.7.0
03/2015	CT-67	CP-150123	0722	1		orrect implementation of CRs	12.6.0	12.7.0
03/2015	CT-67	CP-150120	0724	1		storation-Info header field applicability	12.6.0	12.7.0
03/2015	CT-67	CP-150108	0725	3		ayed-Charge header field	12.6.0	12.7.0
03/2015	CT-67	CP-150108	0727	1		ference update: draft-ietf-insipid-session-id	12.6.0	12.7.0
03/2015	CT-67	CP-150109 CP-150124	0728	4		ference update: draft-holmberg-dispatch-iotl	12.6.0	12.7.0
03/2015	CT-67	CP-150124	0732	1		Correction of applicability of P-Charging-Vector header field in NOTIFY method		12.7.0
03/2015	CT-67	CP-150099	0736	1		Reference update for UUSIW 12.6.0		12.7.0
06/2015	CT-68	CP-150339	0740	-	Re	Reference Update: RFC7462 (alert-info urns)		12.8.0
06/2015	CT-68	CP-150346	0742	1	Re	Removal of IMS debug feature 12.		12.8.0
06/2015	CT-68	CP-150341	0745	-		ndition on usage of Refer-Sub header field	12.7.0	12.8.0
06/2015	CT-68	CP-150346	0748	1	Co	rrecting errors in annex B	12.7.0	12.8.0
06/2015	CT-68	CP-150347	0750	1	754	draft-holmberg-dispatch-iotl-parameter-04 updated to RFC 12.7.0 7549		12.8.0
06/2015	CT-68	CP-150350	0752	1	_			12.8.0
09/2015	CT-69	CP-150471	0770	1		Reference update: draft-ietf-mmusic-sctp-sdp 12.8.0		12.9.0
09/2015	CT-69	CP-150475	0772	-		Missing SIP request in HSS based P-CSCF restoration 12.8.0		12.9.0
09/2015	CT-69	CP-150469	0782			ference update: RFC 7415	12.8.0	12.9.0
09/2015	CT-69	CP-150465	0786	1		cellaneous corrections of annex B	12.8.0	12.9.0
12/2015 12/2015	CT-70	CP-150654 CP-150664	0794 0799	2		epresence IETF draft update	12.9.0 12.9.0	12.10.0 12.10.0
12/2015	CT-70	CP-150664 CP-150731	0803	1		ding the "loopback-indication" to RAVEL S and the conference service	12.9.0	12.10.0
12/2015	CT-70	CP-150731	0809	+-		date of UP6665 references	12.9.0	12.10.0
12/2015	CT-70	CP-150662	0811	1		CSCF restoration corrections	12.9.0	12.10.0
,_010	10.70	1350002	10011			Change history	12.5.0	
Date	TSG#	TSG Doc.	CR	Rev		Subject/Comment		New
03/2016	CT-71	CP-160096	0818	1	F	Updating "Details for operator choice" in DRVCC to incl	ude the	12.11.0
06/2016	CT-72	CP-160258	0833	1	Α			12.12.0
06/2016	CT-72	CP-160258	0839	1	Α	Updates to RFC 7315 P-header extensions usage in SIP requests/responses		
06/2016	CT-72	CP-160258	0842	1	Α			12.12.0
09/2016	CT-73	CP-160447	0850	1	Α			12.13.0
12/2016	CT-74	CP-160620	0859	1	A	· ·		12.14.0
12/2016	CT-74	CP-160620	0863	-	Α	Reference update: RFC 7976		12.14.0
12/2016	CT-74	CP-160621	0873	-	F	-		
03/2017	CT-75	CP-170078	0888	2	A	·		12.15.0
03/2017	CT-75	CP-170079	0892	-	F			
30/2017	0.70	070070	0002	L		1.10.0.0.00 apaato. 11 0 0000		12.15.0

History

	Document history								
V12.5.0	October 2014	Publication							
V12.6.0	January 2015	Publication							
V12.7.0	April 2015	Publication							
V12.8.0	July 2015	Publication							
V12.9.0	October 2015	Publication							
V12.10.0	January 2016	Publication							
V12.11.0	May 2016	Publication							
V12.12.0	August 2016	Publication							
V12.13.0	December 2016	Publication							
V12.14.0	January 2017	Publication							
V12.15.0	April 2017	Publication							