

# ETSI TS 129 198-1 V4.3.8 (2005-12)

---

*Technical Specification*

**Universal Mobile Telecommunications System (UMTS);  
Open Service Access (OSA)  
Application Programming Interface (API);  
Part 1: Overview  
(3GPP TS 29.198-01 version 4.3.8 Release 4)**



---

Reference

RTS/TSGC-0529198-01v438

---

Keywords

UMTS

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

[http://portal.etsi.org/chaicor/ETSI\\_support.asp](http://portal.etsi.org/chaicor/ETSI_support.asp)

---

**Copyright Notification**

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2005.  
All rights reserved.

DECT™, PLUGTESTS™ and UMTS™ are Trade Marks of ETSI registered for the benefit of its Members.  
TIPHON™ and the TIPHON logo are Trade Marks currently being registered by ETSI for the benefit of its Members.  
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

# Contents

Intellectual Property Rights .....	2
Foreword.....	2
Foreword.....	4
Introduction .....	4
1 Scope .....	6
2 References .....	6
3 Definitions and abbreviations.....	6
3.1 Definitions .....	6
3.2 Abbreviations .....	7
4 Open Service Access APIs .....	9
5 Structure of the OSA API (29.198) and Mapping (29.998) documents .....	10
6 Methodology .....	11
6.1 Tools and Languages .....	11
6.2 Packaging .....	11
6.3 Colours .....	11
6.4 Naming scheme .....	11
6.5 State Transition Diagram text and text symbols.....	12
6.6 Exception handling and passing results.....	12
6.7 References .....	12
6.8 Strings and Collections.....	12
6.9 Prefixes.....	12
<b>Annex A (normative):      OMG IDL .....</b>	<b>13</b>
A.1 Tools and Languages.....	13
A.2 Strings and Collections.....	13
A.3 Naming space across CORBA modules .....	13
<b>Annex B (informative):      Change history .....</b>	<b>14</b>
History .....	15

## Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

## Introduction

The present document is part 1 of a multi-part TS covering the 3<sup>rd</sup> Generation Partnership Project: Technical Specification Group Core Network; Open Service Access (OSA); Application Programming Interface (API), as identified below. The **API specification** (3GPP TS 29.198) is structured in the following Parts:

<b>Part 1:</b>	<b>Overview</b>
Part 2:	Common Data Definitions
Part 3:	Framework
Part 4:	Call Control SCF
Part 5:	User Interaction SCF
Part 6:	Mobility SCF
Part 7:	Terminal Capabilities SCF
Part 8:	Data Session Control SCF
Part 9:	Generic Messaging SCF (not part of 3GPP Release 4)
Part 10:	Connectivity Manager SCF (not part of 3GPP Release 4)
Part 11:	Account Management SCF
Part 12:	Charging SCF

The **Mapping specification of the OSA APIs and network protocols** (3GPP TR 29.998) is also structured as above. A mapping to network protocols is however not applicable for all Parts, but the numbering of Parts is kept. Also in case a Part is not supported in a Release, the numbering of the parts is maintained.

OSA API specifications 29.198-family		OSA API Mapping - 29.998-family	
29.198-1	<b>Part 1: Overview</b>	29.998-1	Part 1: Overview
29.198-2	Part 2: Common Data Definitions	29.998-2	<i>Not Applicable</i>
29.198-3	Part 3: Framework	29.998-3	<i>Not Applicable</i>
29.198-4	Part 4: Call Control SCF	29.998-4-1	Subpart 1: Generic Call Control – CAP mapping
		29.998-4-2	
29.198-5	Part 5: User Interaction SCF	29.998-5-1	Subpart 1: User Interaction – CAP mapping
		29.998-5-2	
		29.998-5-3	
		29.998-5-4	Subpart 4: User Interaction – SMS mapping
29.198-6	Part 6: Mobility SCF	29.998-6	User Status and User Location – MAP mapping
29.198-7	Part 7: Terminal Capabilities SCF	29.998-7	<i>Not Applicable</i>
29.198-8	Part 8: Data Session Control SCF	29.998-8	Data Session Control – CAP mapping
29.198-9	<i>Part 9: Generic Messaging SCF</i>	29.998-9	<i>Not Applicable</i>
29.198-10	<i>Part 10: Connectivity Manager SCF</i>	29.998-10	<i>Not Applicable</i>
29.198-11	Part 11: Account Management SCF	29.998-11	<i>Not Applicable</i>
29.198-12	Part 12: Charging SCF	29.998-12	<i>Not Applicable</i>

The following table explains how the various releases of ETSI, Parlay and 3GPP OSA specifications correspond. Each ETSI and 3GPP specification carries a version number and is updated independently. The frequency of 3GPP updates may be up to every 3 months, which is greater than that of ETSI or Parlay, therefore, while there is a corresponding version of 3GPP TS 29.198 for every version of ETSI ES 201 915 or ES 202 915, there is not necessarily a corresponding version of the ETSI specification for each version of the 3GPP specification. For example, there is no ETSI or Parlay specification version which corresponds exactly to the 3GPP issue of TS 29.198 Release 4 from December 2001.

#### ETSI ES 201 915 / Parlay 3 / 3GPP TS 29.198 Release 4 (version 4.x.x)

ETSI OSA Specification Set	Parlay Phase	3GPP TS 29.198 version
-	-	Release 4, March 2001 Plenary
-	-	Release 4, June 2001 Plenary
ES 201 915 v.1.1.1 (complete release)	Parlay 3.0	Release 4, September 2001 Plenary
-	-	Release 4, December 2001 Plenary
ES 201 915 v.1.2.1 (complete release)	Parlay 3.1	Release 4, March 2002 Plenary
ES 201 915 v.1.3.1 (complete release)	Parlay 3.2	Release 4, June 2002 Plenary
-	-	Release 4, September 2002 Plenary
ES 201 915 v.1.4.1 (complete release)	Parlay 3.3	Release 4, March 2003 Plenary
-	-	Release 4, June 2003 Plenary
-	-	Release 4, December 2003 Plenary
-	-	Release 4, June 2004 Plenary
ES 201 915 v1.5.1 (Partial Release)	Parlay 3.4	Release 4, September 2004 Plenary
-	-	Release 4, December 2004 Plenary
-	-	Release 4, December 2005 Plenary

#### ETSI ES 202 915 / Parlay 4 / 3GPP TS 29.198 Release 5 (version 5.x.x)

ETSI OSA Specification Set	Parlay Phase	3GPP TS 29.198 version
-	-	Release 5, March 2002 Plenary
ES 202 915 v.1.1.1 (complete release)	Parlay 4.0	Release 5, September 2002 Plenary
ES 202 915 v.1.2.1 (not parts 9, 13, 14)	Parlay 4.1	Release 5, March 2003 Plenary
-	-	Release 5, June 2003 Plenary
-	-	Release 5, September 2003 Plenary
-	-	Release 5, December 2003 Plenary
-	-	Release 5, March 2004 Plenary
-	-	Release 5, June 2004 Plenary
ES 202 915 v1.3.1, (v1.2.1 for parts 9, 13, 14)	Parlay 4.2	Release 5, September 2004 Plenary
-	-	Release 5, December 2004 Plenary
-	-	Release 5, June 2005 Plenary
-	-	Release 5, December 2005 Plenary

#### ETSI ES 203 915 / Parlay 5 / 3GPP TS 29.198 Release 6 (version 6.x.x)

ETSI OSA Specification Set	Parlay Phase	3GPP TS 29.198 version
-	-	Release 6, June 2003 Plenary
-	-	Release 6, December 2003 Plenary
-	-	Release 6, June 2004 Plenary
ES 203 915 v1.1.1	Parlay 5.0	Release 6, September 2004 Plenary
-	-	Release 6, December 2004 Plenary
-	-	Release 6, March 2005 Plenary
-	-	Release 6, June 2005 Plenary
-	-	Release 6, December 2005 Plenary

---

# 1 Scope

The present document is the first part of the 3GPP Specification defining the Application Programming Interface (API) for Open Service Access (OSA), and provides an overview of the content and structure of the various parts of this specification, and of the relation to other standards documents.

The OSA-specifications define an architecture that enables service application developers to make use of network functionality through an open standardised interface, i.e. the OSA APIs. The concepts and the functional architecture for the OSA are contained in 3GPP TS 23.127 [3]. The requirements for OSA are contained in 3GPP TS 22.127 [2].

This specification has been defined jointly between ETSI TISPAN, 3GPP TSG CN WG5 and The Parlay Group, in co-operation with a number of JAIN™ Community member companies.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 22.127: "Service Requirement for the Open Services Access (OSA); Stage 1".
- [3] 3GPP TS 23.127: "Virtual Home Environment (VHE) / Open Service Access (OSA); Stage 2".
- [4] Void.
- [5] 3GPP TS 22.101: "Service aspects; Service principles".
- [6] Void.
- [7] 3GPP TS 29.002: "Mobile Application Part (MAP) specification".
- [8] 3GPP TS 29.078: "Customised Applications for Mobile network Enhanced Logic (CAMEL); CAMEL Application Part (CAP) specification".
- [9] - [26] Void.

---

# 3 Definitions and abbreviations

## 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TS 22.101 [5] and the following apply.

**Applications:** Services, which are designed using Service Capability Features (SCFs).

**Gateway:** Synonym for Service Capability Server (SCS). From the viewpoint of applications, an SCS can be seen as a gateway to the core network.

**HE-VASP:** Home Environment Value Added Service Provider. This is a VASP that has an agreement with the Home Environment to provide services.

**Home Environment:** responsible for overall provision of services to users.

**Local Service:** A service, which can be exclusively provided in the current serving network by a Value Added Service Provider.

**OSA Interface:** Standardised Interface used by application to access service capability features.

**Personal Service Environment (PSE):** contains personalised information defining how subscribed services are provided and presented towards the user. The Personal Service Environment is defined in terms of one or more User Profiles.

**Service Capabilities:** Bearers defined by parameters, and/or mechanisms needed to realise services. These are within networks and under network control.

**Service Capability Feature (SCF):** Functionality offered by service capabilities that are accessible via the standardised OSA interface.

**Service Capability Server (SCS):** Functional Entity providing OSA interfaces towards an application.

**Service:** term used as an alternative for Service Capability Feature in this specification.

**User Interface Profile:** Contains information to present the personalised user interface within the capabilities of the terminal and serving network.

**User Profile:** This is a label identifying a combination of one user interface profile, and one user services profile.

**User Services Profile:** Contains identification of subscriber services, their status and reference to service preferences.

**Value Added Service Provider:** provides services other than basic telecommunications service for which additional charges may be incurred.

**Virtual Home Environment:** A concept for personal service environment portability across network boundaries and between terminals.

## 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply.

API	Application Programming Interface
CAMEL	Customised Application for Mobile network Enhanced Logic
CAP	CAMEL Application Part
CSE	CAMEL Service Environment
FW	Framework
HE	Home Environment
HE-VASP	Home Environment - Value Added Service Provider
HLR	Home Location Register
INAP	Intelligent Networks Application Part
IDL	Interface Description Language
MAP	Mobile Application Part
ME	Mobile Equipment
MExE	Mobile Station (Application) Execution Environment
MS	Mobile Station
MSC	Mobile Switching Centre
OSA	Open Service Access
PLMN	Public Land Mobile Network
PSE	Personal Service Environment
SAT	SIM Application Tool-Kit
SCF	Service Capability Feature
SCP	Service Control Point
SCS	Service Capability Server
SIM	Subscriber Identity Module



SMS	Short Message Service
SMTP	Simple Mail Transfer Protocol
UE	User Equipment
USIM	Universal Subscriber Identity Module
VLR	Visited Location Register
VASP	Value Added Service Provider
VHE	Virtual Home Environment
WAP	Wireless Application Protocol
WGP	Wireless Gateway Proxy
WPP	Wireless Push Proxy

# 4 Open Service Access APIs

The OSA-specifications define an architecture that enables service application developers to make use of network functionality through an open standardised interface, i.e. the OSA APIs. The network functionality is describes as Service Capability Features (SCFs) or Services. The OSA Framework is a general component in support of Services (Service Capabilities) and Applications. The concepts and the functional architecture for the OSA are contained in 3GPP TS 23.127 [3]. The requirements for OSA are contained in 3GPP TS 22.127 [2].

The OSA API is split into three types of interface classes, Service and Framework (FW).

- Interface classes between the Applications and the Framework (FW), that provide applications with basic mechanisms (e.g. Authentication ) that enable them to make use of the service capabilities in the network.
- Interface classes between Applications and SCFs, which are individual services that may be required by the client to enable the running of third party applications over the interface e.g. Messaging type service.
- Interface classes between the Framework (FW) and the SCFs, that provide the mechanisms necessary for a multi-vendor environment.

These interfaces represent interfaces 1, 2 and 3 in Figure 1 below. The other interfaces are not yet part of the scope of the work.

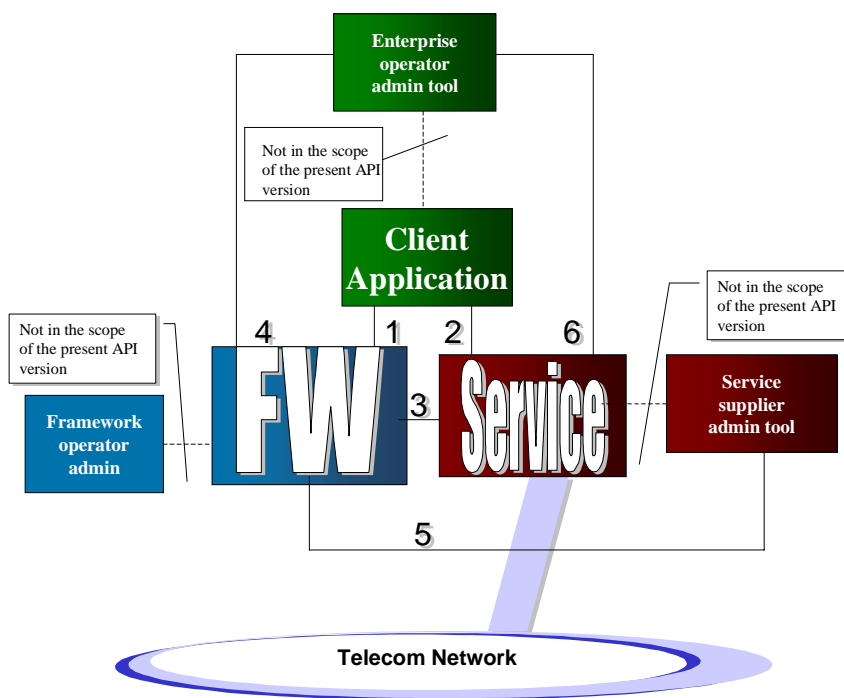


Figure 1:

Within the OSA concept a set of Service Capability Features (SCFs) has been specified. The OSA documentation is structured in parts. The first Part (the present document) contains an overview, the second Part contains common data definitions, the third Part the Framework interfaces and the following Parts contain the description of the SCFs.

NOTE: The terms "Service" and "Service Capability Feature" are used as alternatives for the same concept in the present document. In the OSA API itself the SCFs as identified in the 3GPP requirements and architecture are reflected as "service", in terms like serviceFactory, serviceDiscovery.

---

## 5 Structure of the OSA API (29.198) and Mapping (29.998) documents

The Open Service Access (OSA) Application Programming Interface (API) specifications consist of two sets of documents:

### **API specification** (3GPP TS 29.198)

The Parts of 29.198 - apart from Part 1 (the present document) and Part 2 - define the interfaces, parameters and state models that belong to the API specification. UML (Unified Modelling Language) is used to specify the interface classes.

As such it provides a UML interface class description of the methods (API calls) supported by that interface and the relevant parameters and types. The interfaces are specified in IDL (Interface Description Language).

### **Mapping specification of the OSA APIs and network protocols** (3GPP TR 29.998)

The Parts of 29.998 contain a possible mapping from the APIs defined in 29.198 to various network protocols (i.e. MAP [7], CAP [8], etc.). It is an informative document, since this mapping is considered as implementation- / vendor-dependent. On the other hand this mapping will provide potential service designers with a better understanding of the relationship of the OSA API interface classes and the behaviour of the network associated to these interface classes.

The purpose of the OSA API is to shield the complexity of the network, its protocols and specific implementation from the applications. This means that applications do not have to be aware of the network nodes, a Service Capability Server interacts with, in order to provide the SCFs to the application. The specific underlying network and its protocols are transparent to the application.

The **API specification** (3GPP TS 29.198) is structured in the following Parts:

29.198-1	Part 1:	Overview
29.198-2	Part 2:	Common Data Definitions
29.198-3	Part 3:	Framework
29.198-4	Part 4:	Call Control SCF
29.198-5	Part 5:	User Interaction SCF
29.198-6	Part 6:	Mobility SCF
29.198-7	Part 7:	Terminal Capabilities SCF
29.198-8	Part 8:	Data Session Control SCF
29.198-9	Part 9:	Generic Messaging SCF
29.198-10	Part 10:	Connectivity Manager SCF
29.198-11	Part 11:	Account Management SCF
29.198-12	Part 12:	Charging SCF

The **Mapping specification of the OSA APIs and network protocols** (3GPP TR 29.998) is also structured as above. A mapping to network protocols is however not applicable for all Parts, but the numbering of Parts is kept. Also in case a Part is not supported in a Release, the numbering of the parts is maintained.

## Structure of the Parts of 29.198

The Parts with API specification themselves are structured as follows:

- The Sequence diagrams give the reader a practical idea of how each of the SCF is implemented.
- The Class relationships clause shows how each of the interfaces applicable to the SCF, relate to one another.
- The Interface specification clause describes in detail each of the interfaces shown within the Class diagram part.
- The State Transition Diagrams (STD) show the progression of internal processes either in the application, or Gateway.
- The Data definitions clauses show a detailed expansion of each of the data types associated with the methods within the classes. It is to be noted that some data types are used in other methods and classes and are therefore defined within the Common Data types part of this specification.
- IDL description of the interface (normative Annex).

---

# 6 Methodology

Following is a description of the methodology used for the establishment of API specification for OSA.

## 6.1 Tools and Languages

The Unified Modelling Language (UML) (<http://www.omg.org/uml/>) is used as the means to specify class and state transition diagrams.

## 6.2 Packaging

A hierarchical packaging scheme is used to avoid polluting the global name space. The root is defined as:

org.csapi

## 6.3 Colours

For clarity, class diagrams follow a certain colour scheme. Blue for application interface packages and yellow for all the others.

## 6.4 Naming scheme

The following naming scheme is used for documentation.

### **packages**

lowercase.

Using the domain-based naming (For example, org.csapi)

### **classes, structures and types. Start with T**

TpCapitalizedWithInternalWordsAlsoCapitalized

### **Exception class:**

TpClassNameEndsWithException

### **Interface. Start with Ip:**

IpThisIsAnInterface

**constants:**

P\_UPPER\_CASE\_WITH\_UNDERSCORES\_AND\_START\_WITH\_P

**methods:**

firstWordLowerCaseButInternalWordsCapitalized()

**method's parameters**

firstWordLowerCaseButInternalWordsCapitalized

**collections (set, array or list types)**

TpCollectionEndsWithSet

**class/structure members**

FirstWordAndInternalWordsCapitalized

Spaces in-between words are not allowed.

## 6.5 State Transition Diagram text and text symbols

The descriptions of the State Transitions in the State Transition Diagrams follow the convention:

when\_this\_event\_is\_received [guard condition is true] /do\_this\_action ^send\_this\_message

Furthermore, text underneath a line through the middle of a State indicates an exit or entry event (normally specified which one).

## 6.6 Exception handling and passing results

OSA methods communicate errors in the form of exceptions. OSA methods themselves always use the return parameter to pass results. If no results are to be returned a void is used instead of the return parameter. In order to support mapping to as many languages as possible, no method *out* parameters are allowed.

## 6.7 References

In the interface specification whenever Interface parameters are to be passed as an *in* parameter, they are done so by reference, and the "Ref" suffix is appended to their corresponding type (e.g. `IpAnInterfaceRef` anInterface), a reference can also be viewed as a logical indirection.

Original type	IN parameter declaration	
<code>IpInterface</code>	<code>parm : IN IpInterfaceRef</code>	

## 6.8 Strings and Collections

For character strings, the *String* data type is used without regard to the maximum length of the string.

For homogeneous collections of instances of a particular data type the following naming scheme is used: `<datatype>Set`

## 6.9 Prefixes

OSA constants and data types are defined in the global name space: *org.csapi*.

---

# Annex A (normative): OMG IDL

## A.1 Tools and Languages

The Object Management Group's (OMG) (<http://www.omg.org/>) Interface Definition Language (IDL) is used as a means to programmatically define the interfaces. IDL files are either generated manually from class diagrams or by using a UML tool. In the case IDLs are manually written and/or being corrected manually, correctness has been verified using a CORBA2 (orbos/97-02-25) compliant IDL compiler, e.g. "SUN IDL Compiler" (<http://java.sun.com/products/jdk/idl/index.html>).

---

## A.2 Strings and Collections

In IDL, the data type *String* is typedefed (see Note below) from the CORBA primitive *string*. This CORBA primitive is made up of a length and a variable array of byte.

NOTE: A *typedef* is a type definition declaration in IDL.

In OMG IDL, this maps to a sequence of the data type. A CORBA sequence is implicitly made of a length and a variable array of elements of the same type.

**Example 1:** typedef sequence<TpSessionID> TpSessionIDSet;

Collection types can be implemented (for example, in C++) as a structure containing an integer for the *number* part, and an array for the *data* part.

**Example 2:** The TpAddressSet data type may be defined in C++ as:

```
typedef struct {
    short    number;
    TpAddress address [];
} TpAddressSet;
```

The array "address" is allocated dynamically with the exact number of required TpAddress elements based on "number".

---

## A.3 Naming space across CORBA modules

The following shows the naming space used in this specification.

```
module org {
  module csapi {
    /* The fully qualified name of the following constant is
    org::csapi::P_THIS_IS_AN_OSA_GLOBAL_CONST */
    const long P_THIS_IS_AN_OSA_GLOBAL_CONST= 1999;
    // Add other OSA global constants and types here
    module fw {
      /* no scoping required to access P_THIS_IS_AN_OSA_GLOBAL_CONST */
      const long P_FW_CONST= P_THIS_IS_AN_OSA_GLOBAL_CONST;
    };
    module mm {
      // scoping required to access P_FW_CONST
      const long P_M_CONST= fw::P_FW_CONST;
    };
  };
};
```

## Annex B (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
Mar 2001	CN_11	NP-010134	047	--	CR 29.198: for moving TS 29.198 from R99 to Rel 4 (N5-010158)	3.2.0	4.0.0
Jun 2001	CN_12	NP-010330	001	--	Corrections to OSA API Rel4 (Correction to IDL namespace to align with that of ETSI and Parlay equivalent APIs: Change org.open_service_access root namespace to org.csapi) (N5-010267)	4.0.0	4.1.0
Sep 2001	CN_13	NP-010464	002	--	Changing references to JAIN	4.1.0	4.2.0
Dec 2001	CN_14	NP-010594	003	--	Replace Out Parameters with Return Types	4.2.0	4.3.0
Dec 2001	CN_14	NP-010594	004	--	Remove the perception that the OSA API only uses CORBA for its transport mechanism	4.2.0	4.3.0
Mar 2002	CN_15	--	--	--	Editorial update (no CR) following Hong Kong CN5#16	4.3.0	4.3.1
Mar 2003	CN_19	--	--	--	Editorial update (no CR) following Bangkok CN5#22 (Introduction, Reference Titles)	4.3.1	4.3.2
Jun 2003	CN_20	--	--	--	Editorial update (no CR) following San Diego CN5#23 (Introduction - update of table explaining how the various releases of ETSI, Parlay and 3GPP OSA specifications correspond; References)	4.3.2	4.3.3
Dec 2003	--	--	--	--	Editorial (no CR) update to Introduction (update of tables explaining how the various releases of ETSI, Parlay and 3GPP OSA specifications correspond)	4.3.3	4.3.4
Jun 2004	--	--	--	--	Editorial update (no CR) to Introduction (same as above)	4.3.4	4.3.5
Sep 2004	--	--	--	--	Editorial update (no CR) to Introduction (same as above)	4.3.5	4.3.6
Dec 2004	--	--	--	--	Editorial update (no CR) to Introduction (same as above)	4.3.6	4.3.7
Dec 2005	--	--	--	--	Editorial update (no CR) to Introduction (same as above)	4.3.7	4.3.8

---

## History

<b>Document history</b>		
V4.0.0	March 2001	Publication
V4.1.0	June 2001	Publication
V4.2.0	September 2001	Publication
V4.3.0	December 2001	Publication (Withdrawn)
V4.3.1	March 2002	Publication (Withdrawn)
V4.3.2	March 2003	Publication (Withdrawn)
V4.3.3	June 2003	Publication (Withdrawn)
V4.3.4	December 2003	Publication (Withdrawn)
V4.3.5	June 2004	Publication (Withdrawn)
V4.3.6	September 2004	Publication (Withdrawn)
V4.3.7	December 2004	Publication (Withdrawn)
V4.3.8	December 2005	Publication