


**Universal Mobile Telecommunications System (UMTS);
Telecommunication Management;
Fault Management;
Part 3: Alarm Integration Reference Point:
CORBA solution set version 1:1
(3G TS 32.111-3 version 3.1.0 Release 1999)**

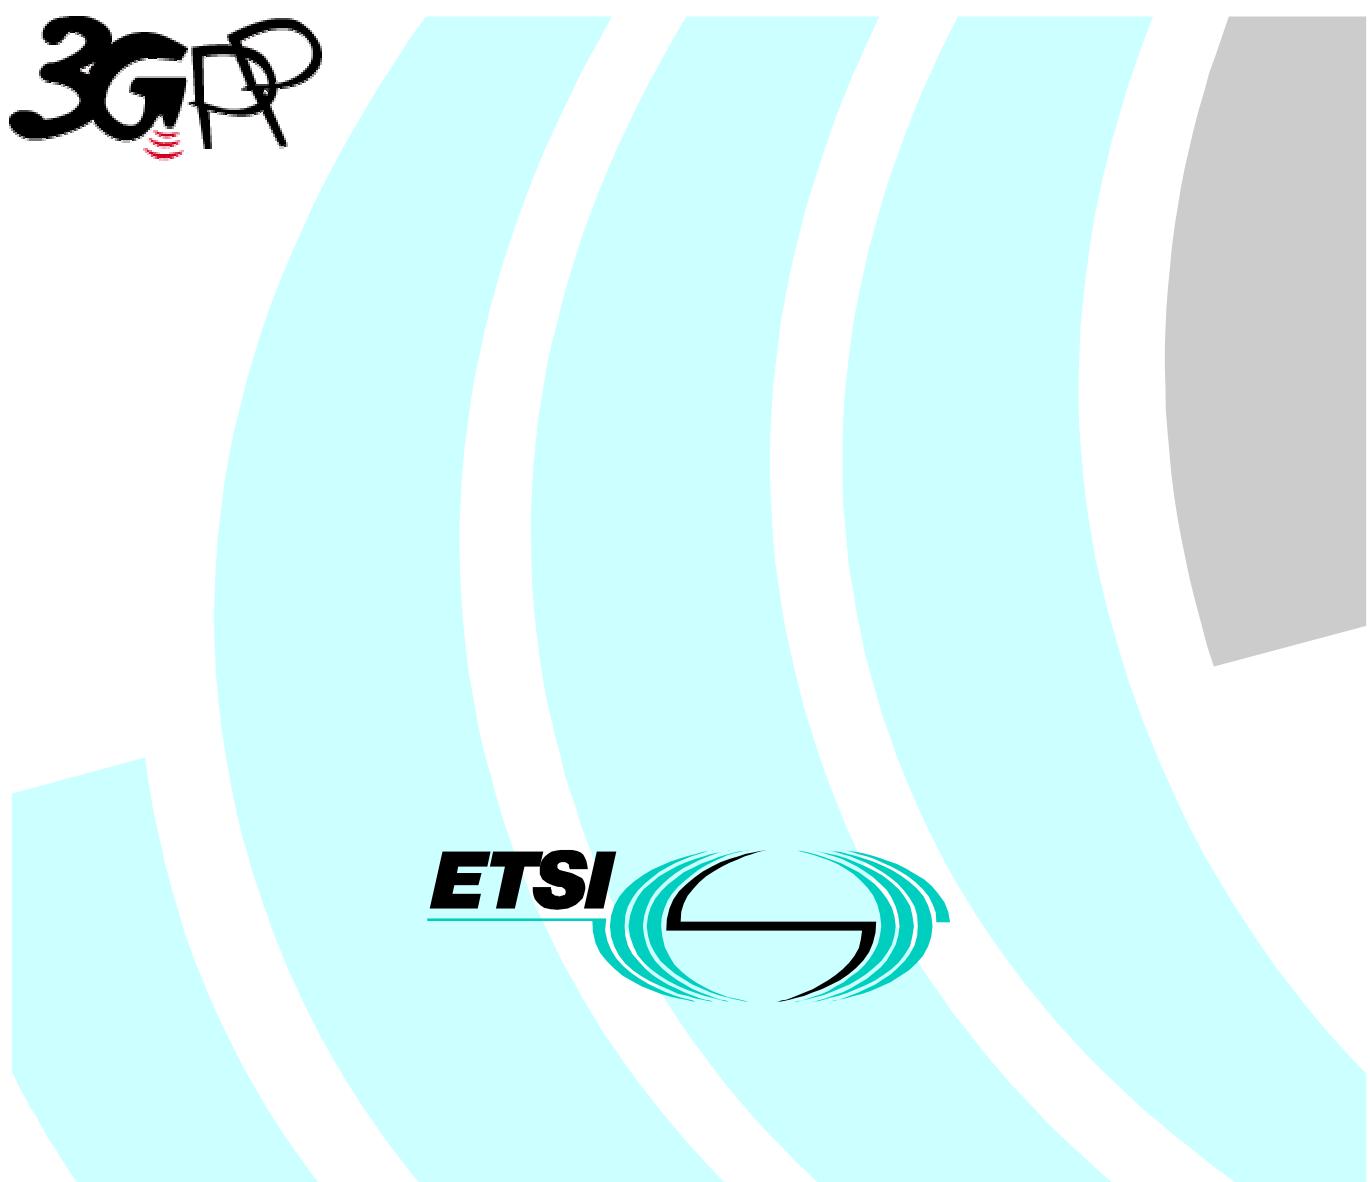

Reference

RTS/TSGS-0532111UR3

Keywords

UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:
<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF).
In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at <http://www.etsi.org/tb/status/>

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.

All rights reserved.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by the ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under www.etsi.org/key.

Contents

Foreword	4
1 Scope.....	5
2 References.....	5
3 Definitions and abbreviations	6
3.1 Definitions	6
3.2 Abbreviations.....	6
3.3 IRP Solution Set version.....	6
4 Architectural Features	6
4.1 Notification Services.....	6
4.2 Push and Pull Style	6
4.3 Support multiple notifications in one push operation	7
4.4 Filter.....	7
5 Mapping	7
5.1 Operation and Notification mapping.....	7
5.2 Operation parameter mapping.....	8
5.3 Notification parameter mapping	9
5.4 Parameter Attribute mapping.....	10
6 Use of OMG Structured Event.....	11
7 AlarmIRPNotifications Interface	14
7.1 Method push (M)	14
Annex A (normative): IDL specification	15
Annex B (informative): Change history.....	22

Foreword

This Technical Specification (TS) has been produced by the 3rd Generation Partnership Project (3GPP).

The present document is part 3 of a multi-part TS covering the 3rd Generation Partnership Project: Technical Specification Group Services and System Aspects, as identified below:

Part 1: “3G Fault Management Requirements”;

Part 2: “Alarm Integration Reference Point: Information Service”;

Part 3: “Alarm Integration Reference Point: CORBA Solution Set Version 1:1”;

Part 4: “Alarm Integration Reference Point: CMIP Solution Set”.

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies the CORBA Solution Set (SS) for the IRP whose semantics is specified in Alarm IRP: Information Service (IS) (3G TS 32.111-2 [13]).

Clause 1 to 3 provides background information. Clause 4 provides key architectural features supporting the SS. Clause 5 defines the mapping of operations, notification, parameters and attributes defined in IS to their SS equivalents. Clause 6 defines the usage of OMG CORBA Structured Event to carry information defined in notifications carrying alarm information. Clause 7 describes the notification interface containing the push method. Annex A contains the IDL specification.

2 References

The following documents contain provisions, which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
 - For a specific reference, subsequent revisions do not apply.
 - For a non-specific reference, the latest version applies.
- [1] ITU-T Recommendation X.721: "Information technology - Open Systems Interconnection - Structure of management information: Definition of management information".
- [2] ITU-T Recommendation X.736: "Information technology – Open Systems Interconnection – Security Alarm Reporting Function".
- [3] ITU-T Recommendation X.732: "Information technology – Open Systems Interconnection – Relationship Management Function".
- [4] ITU-T Recommendation X.732: "Information technology – Open Systems Interconnection – State Management Function".
- [5] ITU-T Recommendation X.732: "Information technology – Open Systems Interconnection – Object Management Function".
- [6] OMG TC Document telecom/98-11-01: "OMG Notification Service".
- [7] OMG CORBA Services: "Common Object Services Specification, Update: November 22, 1996" (Clause 4 contains the Event Service specification).
- [8] 3G TS 32.106-8: "Name Convention for Managed Objects".
- [9] 3G TS 32.106-1: "3G Configuration Management: Concept and Requirements".
- [10] 3G TS 32.106-2: "Notification IRP: Information Service".
- [11] 3G TS 32.106-3: "Notification IRP: CORBA Solution Set".
- [11] ITU-T Recommendation X.735: "Information technology - Open Systems Interconnection - Systems Management: Log control function".
- [12] 3G TS 32.111-1: "3G Fault Management".
- [13] 3G TS 32.111-2: "Alarm Integration Reference Point: Information Service".
- [14] 3G TS 32.111-4: "Alarm Integration Reference Point: CMIP Solution Set".

3 Definitions and abbreviations

3.1 Definitions

In addition to the terms and definitions defined in TS 32.111-2 [13], there are no additional definitions applicable to the present document.

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CORBA	Common Object Request Broker Architecture
IDL	Interface Definition Language
IRP	Integration Reference Point
MOC	Managed Object Class
MOI	Managed Object Instance
NE	Network Element
OMG	Object Management Group
TMN	Telecommunications Management Network
UML	Unified Model Language

3.3 IRP Solution Set version

The version of this CORBA SS is 1:1, where the first “1” indicates the version number of the Alarm IRP: IS (3G TS 32.111-2 [13]) and the second “1” indicates the version number of this document.

4 Architectural Features

The overall architectural feature of Alarm IRP is specified in 3G TS 32.111-2 [13]. This clause specifies features that are specific to the CORBA SS.

4.1 Notification Services

In implementations of CORBA SS, IRPAgent conveys Alarm Information to IRPManager via OMG Notification Service (OMG TC Document telecom [6]).

OMG Event Service provides event routing and distribution capabilities. OMG Notification Service provides, in addition to Event Service, event filtering and Quality Of Service (QOS) as well.

A necessary and sufficient sub set of OMG Notification Services shall be used to support `AlarmIRPNotifications` notifications as specified in 3G TS 32.111-2 [13].

4.2 Push and Pull Style

OMG Notification Service defines two styles of interaction. One is called push style. In this style, IRPAgent pushes notifications to IRPManager as soon as they are available. The other is called pull style. In this style, IRPAgent keeps the notifications till IRPManager requests for them.

This CORBA SS specifies that support of Push style is Mandatory (M) and that support of Pull style is Optional (O).

4.3 Support multiple notifications in one push operation

For efficiency reasons, IRPAgent may send multiple notifications using one single push operation. To pack multiple notifications into one push operation, IRPAgent may wait and not invoke the push operation as soon as notifications are available. To avoid IRPAgent to wait for an extended period of time that is objectionable to IRPManager, IRPAgent shall implement an IRPAgent wide timer configurable by administrator. On expiration of this timer, IRPAgent shall invoke push if there is at least one notification to be conveyed to IRPManager. This timer is re-started after each push invocation.

4.4 Filter

IRPAgent shall optionally support alarm filtering based on IRPManager's supplied alarm filter constraints (e.g., as parameter in `subscribe()` of 3G TS 32.106-2 [10]. Alarm filtering can be applied in the following cases:

- It is applicable to alarms emitted by IRPAgent via `AlarmIRPNotifications`. IRPManager supplies alarm filter constraint via the `subscribe` method. This filter is effective during the period of subscription.
- It is applicable to alarms returned by IRPAgent via the `out` parameter of `get_alarm_list` method. IRPManager supplies alarm filter constraint via the `get_alarm_list` method. This filter is effective only for this method invocation.
- It is applicable to the calculation of alarm counts returned by IRPAgent via the `out` parameters of `get_alarm_count` method. IRPManager supplies alarm filter constraint via the `get_alarm_count` method. This filter is effective only for this method invocation.

This SS shall use of filter constraint grammar specified by reference 3G TS 32.106-2 [6]. The name of the grammar is called “EXTENDED_TCL”. See clause 2.4, Default Filter Constraint Language in 3G TS 32.106-2 [6]. This SS shall use this grammar only.

5 Mapping

5.1 Operation and Notification mapping

Alarm IRP: IS 3G TS 32.111-2 [13] defines semantics of operation and notification visible across the Alarm IRP. Table 1 indicates mapping of these operations and notifications to their equivalents defined in this SS.

Table 1: Mapping from IS Notification/Operation to SS equivalents

IS Operation/ notification 3G TS 32.111-2 [13]	SS Method	Qualifier
<code>acknowledgeAlarms</code>	<code>acknowledge_alarms</code>	M
<code>unacknowledgeAlarms</code>	<code>unacknowledge_alarms</code>	O
<code>getAlarmList</code>	<code>get_alarm_list</code>	M
<code>getAlarmIRPVersion</code>	<code>get_alarm_IRP_version</code>	M
<code>getAlarmCount</code>	<code>get_alarm_count</code>	O
<code>notifyNewAlarm</code>	<code>push_structured_event</code> Note that OMG Notification Service 3G TS 32.106-2 [6] defines this method. See clause 8.1	M
<code>notifyClearedAlarm</code>	<code>push_structured_event</code> See clause 8.1	M
<code>notifyChangedAlarm</code>	<code>push_structured_event</code> See clause 8.1	M
<code>notifyAckStateChanged</code>	<code>push_structured_event</code> See clause 8.1	M
<code>notifyAlarmListRebuilt</code>	<code>push_structured_event</code> See clause 8.1	M

5.2 Operation parameter mapping

Reference 3G TS 32.111-2 [13] defines semantics of parameters carried in operations across the Alarm IRP. Table2 and table 3 indicate the mapping of these parameters, as per operation, to their equivalents defined in this SS.

Table 2: Mapping from IS acknowledgeAlarms parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
alarmInformation ReferenceList	AlarmIRPConstDefs::AlarmInformationIdSeq alarm_information_id_list	M
ackUserId	string ack_user_id	M
ackSystemId	string ack_system_id	O
bad AlarmInformation ReferenceList	AlarmIRPConstDefs::AlarmInformationIdSeq bad_alarm_information_id_list	M
status	CommonIRPConstDefs::Signal Exceptions: AcknowledgeAlarms, ParameterNotSupported, InvalidParameter	M

Table 3: Mapping from IS unacknowledgeAlarms parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
alarm InformationReferenceList	AlarmIRPConstDefs::AlarmInformationIdSeq alarm_information_id_list	M
ackUserId	string ack_user_id	M
ackSystemId	string ack_system_id	O
badAlarm Information ReferenceList	AlarmIRPConstDefs::AlarmInformationIdSeq bad_alarm_information_id_list	M
status	CommonIRPConstDefs::Signal Exceptions: UnacknowledgeAlarms, OperationNotSupported, ParameterNotSupported, InvalidParameter	M

Table 4: Mapping from IS getAlarmList parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
alarmAckState, filter	string filter	O
alarmInformation List	Return value of type AlarmIRPConstDefs::AlarmInformationSeq	M
status	Exceptions: GetAlarmList, ParameterNotSupported, InvalidParameter	M

Table 5: Mapping from IS getAlarmCount parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
alarmAckState, filter	string filter	O
criticalCount, majorCount, minorCount, warningCount, indeterminateCount, clearedCount	long critical_count, long major_count, long minor_count, long warning_count, long indeterminate_count, long cleared_count	M
status	Exceptions: GetAlarmCount, OperationNotSupported, ParameterNotSupported, InvalidParameter	M

Table 6: Mapping from IS getAlarmIRPVersion parameters to SS equivalents

IS Operation parameter	SS Method parameter	Qualifier
versionNumberList	Return value of type CommonIRPConstDefs::VersionNumberSet	M
status	Exceptions: GetAlarmIRPVersion	M

5.3 Notification parameter mapping

Reference 3G TS 32.111-2 [13] defines semantics of parameters carried in notifications across the Alarm IRP. Table 7 and table 8 indicate the mapping of these parameters, as per notification, to their equivalents defined in this SS.

Table 7 and table 8 are relevant for notifyNewAlarm, notifyChangedAlarm, notifyClearedAlarm, notifyAckStateChanged.

Table 7: Mapping from IS notify[New,Changed,Cleared]Alarm and notifyAckStateChanged parameters to SS equivalents

IS Notification parameter	SS Notification parameter	Comment
notificationHeader	structuredEvent Note that OMG Notification Service [6] defines this structuredEvent. See Clause 4 as well.	Attributes of notificationHeader are mapped to attributes of structuredEvent. See clause 6.4 for attributes related to notificationHeader. See Table 9 for qualifiers for the parameter-attributes. For notifyNewAlarm, notifyChangedAlarm, notifyClearedAlarm and notifyAckStateChanged, the extendedEventType shall contain a string of extendedEventTypeValue.NOTIFY_FM_NEW_ALARM, extendedEventTypeValue.NOTIFY_FM_CHANGED_ALARM, extendedEventTypeValue.NOTIFY_FM_CLEARED_ALARM, extendedEventTypeValue.NOTIFY_FM_ACK_STATE_CHANGED respectively.
alarmInformationBody	structuredEvent	Attributes of alarmInformationBody are mapped to attributes of structuredEvent. See clause 6.4 for attributes related to alarmInformationBody. See table 10 for qualifiers for the parameter-attributes.

Table 8 is relevant for notifyAlarmListRebuilt.

Table 8: Mapping from IS notifyAlarmListRebuilt parameters to SS equivalents

IS Notification parameter	SS equivalent	Comment
notificationHeader	structuredEvent	The managedObjectClass, systemDN shall be absent. The eventType shall contain a zero-length string. The extendedEventType shall contain a string of extendedEventTypeValue.NOTIFY_FM_ALARM_LIST_REBUILT. The managedObjectInstance shall carry the DN of the IRP Agent whose Alarm List has been rebuilt. Syntax and semantics of this string conform to the Managed Object string representation specified in [8]. See clause 6.4 for attributes related to notificationHeader. See Table 9 for qualifiers for the parameter-attributes.
reason	reason	It is a string indicating the Alarm List rebuilt reason.

5.4 Parameter Attribute mapping

Notification IRP: IS 3G TS 32.106-2 [10] defines the semantics of attributes for notificationHeader parameter.
 Alarm IRP: IS 3G TS 32.111-2 [13] identifies notificationHeader for use for its IRP. 3G TS 32.111-2 [13] also qualifies the attributes of the notificationHeader parameter. Table 9 shows the mapping of these IS attributes to SS equivalents.

Table 9: Mapping from IS notificationHeader attributes to SS equivalents

IS Attribute of notificationHeader in [10]	SS Attribute	Qualifier
managedObjectClass	managedObjectClass	O
managedObjectInstance	managedObjectInstance	M
notificationID	notificationID	M
eventTime	eventTime	M
systemDN	systemDN	M
eventType	eventType	M
extendedEventType	extendedEventType	M

Alarm IRP: IS 3G TS 32.111-2 [13] defines and qualifies the semantics of attributes for alarmInformationBody parameter. The following table shows the mapping of these IS attributes to SS equivalents.

Table 10: Mapping from IS alarmInformationBody attributes to SS equivalents

IS Attribute of alarmInformationBody in 3G TS 32.111-2 [13]	SS Attribute	Qualifier
probableCause	probableCause	M
perceivedSeverity	perceivedSeverity	M
specificProblem	specificProblem	O
correlatedNotifications	correlatedNotifications	O
backedUpStatus	backedUpStatus	O
backUpObject	backUpObject	O
trendIndication	trendIndication	O
thresholdInfo	thresholdInfo	O
stateChangeDefinition	stateChangeDefinition	O
monitoredAttributes	monitoredAttributes	O
proposedRepairActions	proposedRepairActions	O
additionalText	additionalText	O
additionalInformation.alarmId	alarmId	M
additionalInformation.ackTime	ackTime	note 1
additionalInformation.ackUserId	ackUserId	note 1
additionalInformation.ackSystemId	ackSystemId	note 1
additionalInformation.ackState	ackState	note 1

NOTE 1: See qualification information in 3G TS 32.111-2 [13], Table 13: Parameter-Attributes of alarmInformationBody.

6 Use of OMG Structured Event

Operation `notify` defined in 3G TS 32.111-2 [13] carries parameters, such as `notificationHeader` and `alarmInformationBody`. In CORBA SS, OMG defined `StructuredEvent` (see ITU-T Recommendation X.736 [2]) is used to carry notification. This clause identifies the OMG defined `StructuredEvent` attributes that carry the attributes of parameters defined in 3G TS 32.111-2 [13].

The composition of OMG Structured Event, as defined in the OMG TC Document telecom [6], is:

```
Header
  Fixed Header
    domain_name
    type_name
    event_name
  Variable Header
Body
  filterable_body_fields
  remaining_body
```

Table 11 lists all OMG Structured Event attributes in the second column. The first column identifies the SS attributes, if any, that shall be carried in the Structured Event attributes.

Table 11: Use of OMG Structured Event

SS Attribute	OMG CORBA Structured Event attribute	Comment
There is no corresponding SS attribute.	domain_name	It contains a string defined by interface <code>IRPNotificationCategoryValue.alarmIRPVersion_1_1</code> . It indicates the syntax and semantics of this Structured Event is defined by Alarm IRP: CORBA SS 1:1.
eventType	type_name	Attribute <code>eventType</code> is an attribute of <code>notificationHeader</code> . It shall indicate one of the following ITU-T defined semantics: communications alarm, processing error alarm, environmental alarm, quality of service alarm and equipment alarm. It is a string. See block of const string definitions starting with “ <code>ET_</code> ” in the IDL.
extendedEventType	event_name	Attribute <code>extendedEventType</code> is an attribute of <code>notificationHeader</code> . It shall identify one of the following: <ul style="list-style-type: none"> • notify a new alarm • notify changes in alarm state • notify changes in alarm acknowledgement state • notify alarm cleared • notify Alarm List has been successfully rebuilt It is a string. See block of const string definitions starting with “ <code>NOTIFY_FM_</code> ” in the IDL.
There is no corresponding SS attribute.	variableHeader	
managedObjectClass, managedObjectInstance	One NV pair of filterable_body_fields	NV stands for name-value pair. Order arrangement of NV pairs is not significant. The name of NV-pair is always encoded in string. They are attributes of <code>notificationHeader</code> . Name of NV pair is a string, <code>AttributeNameValue.managedObjectInstance</code> . Value of NV pair is a string. See corresponding table in Notification IRP: CORBA SS (3G TS 32.106-3 [11]).
notificationId	One NV pair of filterable_body_fields	It is an attribute of <code>notificationHeader</code> . Name of NV pair is a string, <code>AttributeNameValue.notificationId</code> . Value of NV pair is a long. See corresponding table in Notification IRP: CORBA SS (3G TS 32.106-3 [11]).
eventTime	One NV pair of filterable_body_fields	It is an attribute of <code>notificationHeader</code> . Name of NV pair is <code>AttributeNameValue.eventTime</code> . Value of NV pair is a <code>IRPTime</code> . See corresponding table in Notification IRP: CORBA SS (3G TS 32.106-3 [11]).
systemDN	One NV pair of filterable_body_fields	It is an attribute of <code>notificationHeader</code> . Name of NV pair is a string, <code>AttributeNameValue.systemDN</code> . Value of NV pair is a string. See corresponding table in Notification IRP: CORBA SS [11].
probableCause	One NV pair of filterable_body_fields	It is an attribute of <code>alarmInformationBody</code> . Name of NV pair is a string, <code>AttributeNameValue.probableCause</code> . Value of NV pair is a short defined by <code>ProbableCauseValue</code> .
perceivedSeverity	One NV pair of filterable_body_fields	It is an attribute of <code>alarmInformationBody</code> . Name of NV pair is a string, <code>AttributeNameValue.perceivedSeverity</code> . Value of NV pair is a short defined by <code>PS_INDETERMINATE</code> , <code>PS_CRITICAL</code> , etc.
specific	One NV pair of	It is an attribute of <code>alarmInformationBody</code> .

Problem	filterable_body_fields	Name of NV pair is a string, AttributeNameValue.specificProblem. Value of NV pair is a string.
correlated Notifications	One NV pair of filterable_body_fields	It is an attribute of alarmInformationBody. Name of NV pair is a string, AttributeNameValue.correlatedNotifications. Value of NV pair is a CorrelatedNotificationSetType.
backed UpStatus	One NV pair of filterable_body_fields	It is an attribute of alarmInformationBody. Name of NV pair is a string, AttributeNameValue.backedUpStatus. Value of NV pair is a boolean BackedUpStatusType.
backUpObject	One NV pair of filterable_body_fields	It is an attribute of alarmInformationBody. Name of NV pair is a string, AttributeNameValue.backedUpStatus. Value of NV pair is a string carrying of DN of the back-up object. See 3G TS 32.106-8 [8] for the DN string representation.
trend Indication	One NV pair of filterable_body_fields	It is an attribute of alarmInformationBody. Name of NV pair is a string, AttributeNameValue.trendIndication. Value of NV pair is an enum TrendIndicationType.
thresholdInfo	One NV pair of filterable_body_fields	It is an attribute of alarmInformationBody. Name of NV pair is a string, ParameterNameValue.thresholdInfo. Value of NV pair is an enum ThresholdIndicationType.
stateChange Definition	One NV pair of filterable_body_fields	It is an attribute of alarmInformationBody. Name of NV pair is a string, AttributeNameValue.stateChangeDefinition. Value of NV pair is an AttributeChangeSetType.
monitored Attributes	One NV pair of filterable_body_fields	It is an attribute of alarmInformationBody. Name of NV pair is a string, AttributeNameValue.monitoredAttributes. Value of NV pair is an AttributeSetType.
proposed RepairActions	One NV pair of filterable_body_fields	It is an attribute of alarmInformationBody. Name of NV pair is a string, AttributeNameValue.proposedRepairActions. Value of NV pair is a string.
additional Text	One NV pair of filterable_body_fields	It is an attribute of alarmInformationBody. Name of NV pair is a string, AttributeNameValue.additionalText. Value of NV pair is a string.
additional Information.alarmId	One NV pair of filterable_body_fields	It is an attribute of alarmInformationBody. Name of NV pair is a string, AttributeNameValue.alarmId. Value of NV pair is a string. If the string is a zero-length string or if this NV pair is absent, the default semantics is that alarmId is a concatenation of managedObjectInstance, eventType, probableCause and specificProblem, if present, of this Structured Event. Since probableCause is encoded as a short, it shall be converted into string before concatenation. The resultant string shall not contain spaces.
additional Information.ackTime	One NV pair of filterable_body_fields	It is an attribute of notificationHeader. Name of NV pair is a string, AttributeNameValue.ackTime. Value of NV pair is a IRPTime.
additional Information.ackUserId	One NV pair of filterable_body_fields	It is an attribute of alarmInformationBody. Name of NV pair is a string, AttributeNameValue.ackUserId. Value of NV pair is a string.
additional Information.	One NV pair of filterable_	It is an attribute of alarmInformationBody. Name of NV pair is a string, AttributeNameValue.ackSystemId.

ackSystemId	body_fields	Value of NV pair is a string.
additional Information. ackState	One NV pair of filterable_body_fields	It is an attribute of alarmInformationBody. Value of NV pair is a short defined by ACK_STATE_ACKNOWLEDGED and ACK_STATE_UNACKNOWLEDGED. Value of NV pair is a short defined by AlarmAckState.
There is no corresponding SS attribute.	remaining_body	

7 AlarmIRPNotifications Interface

OMG CORBA Notification push operation is used to realise the notification of AlarmIRPNotifications. All the notifications in this interface are implemented using this `push_structured_event` method.

7.1 Method `push` (M)

```
module CosNotifyComm {
    ...
    Interface SequencePushConsumer : NotifyPublish {
        void push_structured_events(
            in CosNotification::EventBatch notifications)
        raises( CosEventComm::Disconnected);
        ...
    };
    // SequencePushConsumer
    ...
};

// CosNotifyComm
```

NOTE 1: The `push_structured_events` method takes an input parameter of type `EventBatch` as defined in the OMG `CosNotification` module (OMG TC Document telecom [6]). This data type is the same as a sequence of Structured Events. Upon invocation, this parameter will contain a sequence of Structured Events being delivered to IRPManager by IRPAgent to which it is connected.

NOTE 2: The maximum number of events that will be transmitted within a single invocation of this operation is controlled by IRPAgent wide configuration parameter.

NOTE 3: The amount of time the supplier (IRPAgent) of a sequence of Structured Events will accumulate individual events into the sequence before invoking this operation is controlled by IRPAgent wide configuration parameter as well.

NOTE 4: IRPAgent may push `EventBatch` with only one Structured Event.

Annex A (normative): IDL specification

```

/* ## Module: AlarmConstDefs

This module contains commonly used definitions.
=====
 */

#ifndef AlarmIRPConstDefs_idl
#define AlarmIRPConstDefs_idl

#include "CosNotification.idl"

#pragma prefix "3gppsa5.org"
module AlarmIRPConstDefs {

/*
This block identifies all TMN ITU-T defined event types used by Alarm
IRP of this version. Their semantics are defined by ITU-T. Their
encodings for this version of Alarm IRP are defined here. Other IRP
documents, or other versions of Alarm IRP, shall identify their own
ITU-T defined event types for their use. They shall define their encodings
as well. Note all values are unique among themselves. Other IRP documents
can use the same values.
*/
const string ET_COMMUNICATIONS_ALARM = "x1";
const string ET_PROCESSING_ERROR_ALARM = "x2";
const string ET_ENVIRONMENTAL_ALARM = "x3";
const string ET_QUALITY_OF_SERVICE_ALARM = "x4";
const string ET_EQUIPMENT_ALARM = "x5";

/*
This block identifies IRP defined, and not ITU-T defined, event types
used by this Alarm IRP version.
*/
const string NOTIFY_FM_NEW_ALARM = "x1";
const string NOTIFY_FM_CHANGED_ALARM = "x2";
const string NOTIFY_FM_ACK_STATE_CHANGED = "x3";
const string NOTIFY_FM_CLEARED_ALARM = "x4";
const string NOTIFY_FM_ALARM_LIST_REBUILT = "x5";

/*
It indicates if an object has a back up.
True implies backup. False implies not backed up.
*/
typedef boolean BackedUpStatusType;

/*
It indicates if the threshold crossed was in the up or down direction.
*/

```

```

enum ThresholdIndicationType {Up, Down};

/*
It indicates if some observed condition is getting better, worse,
or not changing.
*/

enum TrendIndicationType {LessSevere, NoChange, MoreSevere};

/*
It is used in a notification to report a changed attribute value.
*/

struct AttributeValueType {
    string attributeName;
    any oldValue; // type depends on attribute
    any newValue; // type depends on attribute
};

typedef sequence <AttributeValueChangeType> AttributeChangeSetType;

/*
It is used in a notification to report a changed attribute value.
*/

struct AttributeValueType {
    string attributeName;
    any value; // type will depend on the attribute
};

typedef sequence <AttributeValueType> AttributeSetType;

/*
This block identifies the levels of severity.
*/

const short PS_INDETERMINATE= 1;
const short PS_CRITICAL= 2;
const short PS_MAJOR= 3;
const short PS_MINOR= 4;
const short PS_WARNING= 5;
const short PS_CLEARED= 6;

/*
This block identifies the acknowledgement state reported alarm.
*/
    const short ACK_STATE_ACKNOWLEDGED= 1;
    const short ACK_STATE_UNACKNOWLEDGED= 2;

/*
This block identifies the probable cause of a reported alarm.
*/

const short PC_INDETERMINATE = 0;
const short PC_ALARM_INDICATION_SIGNAL = 1;
const short PC_CALL_SETUP_FAILURE = 2;
const short PC_DEGRADED_SIGNAL_M3100 = 3;
const short PC_FAR_END_RECEIVER_FAILURE = 4;
const short PC_FRAMING_ERROR_M3100 = 5;
const short PC_LOSS_OF_FRAME = 6;

```

```
const short PC LOSS OF POINTER = 7;
const short PC LOSS OF SIGNAL = 8;
const short PC PAYLOAD TYPE MISMATCH = 9;
const short PC TRANSMISSION ERROR = 10;
const short PC REMOTE ALARM INTERFACE = 11;
const short PC EXCESSIVE BIT ERROR RATE = 12;
const short PC PATH TRACE MISMATCH = 13;
const short PC UNAVAILABLE = 14;
const short PC SIGNAL LABEL MISMATCH = 15;
const short PC LOSS OF MULTI FRAME = 16;
const short PC BACK PLANE FAILURE = 51;
const short PC DATA SET PROBLEM = 52;
const short PC EQUIPMENT IDENTIFIER DUPLICATION = 53;
const short PC EXTERNAL DEVICE PROBLEM = 54;
const short PC LINE CARD PROBLEM = 55;
const short PC MULTIPLEXER PROBLEM_M3100 = 56;
const short PC NE IDENTIFIER DUPLICATION = 57;
const short PC POWER PROBLEM_M3100 = 58;
const short PC PROCESSOR PROBLEM_M3100 = 59;
const short PC PROTECTION PATH FAILURE = 60;
const short PC RECEIVER FAILURE_M3100 = 61;
const short PC REPLACEABLE UNIT MISSING = 62;
const short PC REPLACEABLE UNIT TYPE MISMATCH = 63;
const short PC SYNCHRONISATION SOURCE MISMATCH = 64;
const short PC TERMINAL PROBLEM = 65;
const short PC TIMING PROBLEM_M3100 = 66;
const short PC TRANSMITTER FAILURE_M3100 = 67;
const short PC TRUNK CARD PROBLEM = 68;
const short PC REPLACEABLE UNIT PROBLEM = 69;
const short PC AIR COMPRESSOR FAILURE = 101;
const short PC AIR CONDITIONING FAILURE = 102;
const short PC AIR DRYER FAILURE = 103;
const short PC BATTERY DISCHARGING = 104;
const short PC BATTERY FAILURE = 105;
const short PC COMMERCIAL POWER FAILURE = 106;
const short PC COOLING FAN FAILURE = 107;
const short PC ENGINE FAILURE = 108;
const short PC FIRE DETECTOR FAILURE = 109;
const short PC FUSE FAILURE = 110;
const short PC GENERATOR FAILURE = 111;
const short PC LOW BATTERY THRESHOLD = 112;
const short PC PUMP FAILURE_M3100 = 113;
const short PC RECTIFIER FAILURE = 114;
const short PC RECTIFIER HIGH VOLTAGE = 115;
const short PC RECTIFIER LOW F VOLTAGE = 116;
const short PC VENTILATION SYSTEM FAILURE = 117;
const short PC ENCLOSURE DOOR OPEN_M3100 = 118;
const short PC EXPLOSIVE GAS = 119;
const short PC FIRE = 120;
const short PC FLOOD = 121;
const short PC HIGH HUMIDITY = 122;
const short PC HIGH TEMPERATURE = 123;
const short PC HIGH WIND = 124;
const short PC ICE BUILD UP = 125;
const short PC LOW FUEL = 127;
const short PC LOW HUMIDITY = 128;
const short PC LOW CABLE PRESSURE = 129;
const short PC LOW TEMPERATURE = 130;
const short PC LOW WATER = 131;
const short PC SMOKE = 132;
const short PC TOXIC GAS = 133;
```

```
const short PC_STORAGE_CAPACITY_PROBLEM_M3100 = 151;
const short PC_MEMORY_MISMATCH = 152;
const short PC_CORRUPT_DATA_M3100 = 153;
const short PC_OUT_OF_CPU_CYCLES = 154;
const short PC_SOFTWARE_ENVIRONMENT_PROBLEM = 155;
const short PC_SOFTWARE_DOWNLOAD_FAILURE = 156;
const short PC_ADAPTER_ERROR = 301;
const short PC_APPLICATION_SUBSYSTEM_FAILURE = 302;
const short PC_BANDWIDTH_REDUCTION = 303;
const short PC_COMMUNICATION_PROTOCOL_ERROR = 305;
const short PC_COMMUNICATION_SUBSYSTEM_FAILURE = 306;
const short PC_CONFIGURATION_OR_CUSTOMIZING_ERROR = 307;
const short PC_CONGESTION = 308;
const short PC_CPU_CYCLES_LIMIT_EXCEEDED = 310;
const short PC_DATA_SET_OR_MODEM_ERROR = 311;
const short PC_DTE_DCE_INTERFACE_ERROR = 313;
const short PC_EQUIPMENT_MALFUNCTION = 315;
const short PC_EXCESSIVE_VIBRATION = 316;
const short PC_FILE_ERROR = 317;
const short PC_HEATING_OR_VENTILATION_OR_COOLING_SYSTEM_PROBLEM = 321;
const short PC_HUMIDITY_UNACCEPTABLE = 322;
const short PC_INPUT_OUTPUT_DEVICE_ERROR = 323;
const short PC_INPUT_DEVICE_ERROR = 324;
const short PC_LAN_ERROR = 325;
const short PC_LEAK_DETECTION = 326;
const short PC_LOCAL_NODE_TRANSMISSION_ERROR = 327;
const short PC_MATERIAL_SUPPLY_EXHAUSTED = 330;
const short PC_OUT_OF_MEMORY = 332;
const short PC_OUTPUT_DEVICE_ERROR = 333;
const short PC_PERFORMANCE_DEGRADED = 334;
const short PC_PRESSURE_UNACCEPTABLE = 336;
const short PC_QUEUE_SIZE_EXCEEDED = 339;
const short PC_RECEIVE_FAILURE = 340;
const short PC_REMOTE_NODE_TRANSMISSION_ERROR = 342;
const short PC_RESOURCE_AT_OR_NEARING_CAPACITY = 343;
const short PC_RESPONSE_TIME_EXCESSIVE = 344;
const short PC_RETRANSMISSION_RATE_EXCESSIVE = 345;
const short PC_SOFTWARE_ERROR = 346;
const short PC_SOFTWARE_PROGRAM_ABNORMALLY_TERMINATED = 347;
const short PC_SOFTWARE_PROGRAM_ERROR = 348;
const short PC_TEMPERATURE_UNACCEPTABLE = 350;
const short PC_THRESHOLD_CROSSED = 351;
const short PC_TOXIC_LEAK_DETECTED = 353;
const short PC_TRANSMIT_FAILURE = 354;
const short PC_UNDERLYING_RESOURCE_UNAVAILABLE = 356;
const short PC_VERSION_MISMATCH = 357;
const short PC_A_BIS_TO_BTS_INTERFACE_FAILURE = 501;
const short PC_A_BIS_TO_TRX_INTERFACE_FAILURE = 502;
const short PC_ANTENNA_PROBLEM = 503;
const short PC_BATTERY_BREAKDOWN = 504;
const short PC_BATTERY_CHARGING_FAULT = 505;
const short PC_CLOCK_SYNCHRONISATION_PROBLEM = 506;
const short PC_COMBINER_PROBLEM = 507;
const short PC_DISK_PROBLEM = 508;
const short PC_EXCESSIVE_RECEIVER_TEMPERATURE = 510;
const short PC_EXCESSIVE_TRANSMITTER_OUTPUT_POWER = 511;
const short PC_EXCESSIVE_TRANSMITTER_TEMPERATURE = 512;
const short PC_FREQUENCY_HOPPING_DEGRADED = 513;
const short PC_FREQUENCY_HOPPING_FAILURE = 514;
const short PC_FREQUENCY_REDEFINITION_FAILED = 515;
const short PC_LINE_INTERFACE_FAILURE = 516;
```

```

const short PC_LINK_FAILURE = 517;
const short PC_LOSS_OF_SYNCHRONISATION = 518;
const short PC_LOST_REDUNDANCY = 519;
const short PC_MAINTS_BREAKDOWN_WITH_BATTERY_BACKUP = 520;
const short PC_MAINTS_BREAKDOWN_WITHOUT_BATTERY_BACKUP = 521;
const short PC_POWER_SUPPLY_FAILURE = 522;
const short PC_RECEIVER_ANTENNA_FAULT = 523;
const short PC_RECEIVER_MULTICOUPLER_FAILURE = 525;
const short PC_REDUCED_TRANSMITTER_OUTPUT_POWER = 526;
const short PC_SIGNAL_QUALITY_EVALUATION_FAULT = 527;
const short PC_TIMESLOT_HARDWARE_FAILURE = 528;
const short PC_TRANSCEIVER_PROBLEM = 529;
const short PC_TRANSCODER_PROBLEM = 530;
const short PC_TRANSCODER_OR_RATE_ADAPTER_PROBLEM = 531;
const short PC_TRANSMITTER_ANTENNA_FAILURE = 532;
const short PC_TRANSMITTER_ANTENNA_NOT_ADJUSTED = 533;
const short PC_TRANSMITTER_LOW_VOLTAGE_OR_CURRENT = 535;
const short PC_TRANSMITTER_OFF_FREQUENCY = 536;
const short PC_DATABASE_INCONSISTENCY = 537;
const short PC_FILE_SYSTEM_CALL_UNSUCCESSFUL = 538;
const short PC_INPUT_PARAMETER_OUT_OF_RANGE = 539;
const short PC_INVALID_PARAMETER = 540;
const short PC_INVALID_POINTER = 541;
const short PC_MESSAGE_NOT_EXPECTED = 542;
const short PC_MESSAGE_NOT_INITIALISED = 543;
const short PC_MESSAGE_OUT_OF_SEQUENCE = 544;
const short PC_SYSTEM_CALL_UNSUCCESSFUL = 545;
const short PC_TIMEOUT_EXPIRED = 546;
const short PC_VARIABLE_OUT_OF_RANGE = 547;
const short PC_WATCH_DOG_TIMER_EXPIRED = 548;
const short PC_COOLING_SYSTEM_FAILURE = 549;
const short PC_EXTERNAL_EQUIPMENT_FAILURE = 550;
const short PC_EXTERNAL_POWER_SUPPLY_FAILURE = 551;
const short PC_EXTERNAL_TRANSMISSION_DEVICE_FAILURE = 552;
const short PC_REDUCED_ALARM_REPORTING = 561;
const short PC_REDUCED_EVENT_REPORTING = 562;
const short PC_RECUCED_LOGGING_CAPABILITY = 563;
const short PC_SYSTEM_RESOURCES_OVERLOAD = 564;
const short PC_BROADCAST_CHANNEL_FAILURE = 565;
const short PC_CALL_ESTABLISHMENT_ERROR = 566;
const short PC_INVALID_MESSAGE_RECEIVED = 567;
const short PC_INVALID_MSU_RECEIVED = 568;
const short PC_LAPD_LINK_PROTOCOL_FAILURE = 569;
const short PC_LOCAL_ALARM_INDICATION = 570;
const short PC_REMOTE_ALARM_INDICATION = 571;
const short PC_ROUTING_FAILURE = 572;
const short PC_SS7_PROTOCOL_FAILURE = 573;
const short PC_TRANSMISSION_FAILURE = 574;

```

```

typedef sequence <string> AlarmInformationIdSeq;

typedef CosNotification::EventBatch AlarmInformationSeq;

};

#endif

/* ## Module: AlarmIRPSystem

```

This module contains the specification of all operations of Alarm IRP Agent specified in Alarm IRP: IS version 1 and Alarm IRP: CORBA SS version 1:1.

```

#ifndef  AlarmIRPSystem_idl
#define  AlarmIRPSystem_idl

#include "CosNotification.idl"
#include "AlarmIRPCConstDefs.idl"
#include "CommonIRPCConstDefs.idl"
#pragma prefix "3gppsa5.org"

module AlarmIRPSystem {

    /*
     System fails to complete the operation. System provides
     reasons whose semantics is outside the scope of this IRP.
    */

    exception AcknowledgeAlarms { string reason; };
    exception UnacknowledgeAlarms { string reason; };
    exception GetAlarmList {string reason; };
    exception GetAlarmIRPVersion { string reason; };
    exception GetAlarmCount { string reason; };
    exception ParameterNotSupported { string parameter; };
        //name of the unsupported parameter as defined in IDL.
    exception InvalidParameter { string parameter; };
        //name of the parameter as defined in IDL
    exception OperationNotSupported {};
    exception NextAlarmInformations { string reason; };

    /**
     The AlarmInformationIterator is used to iterate through a set of Alarm
     Informations in Alarm List. Method get_alarm_list contains it as
     output parameter.
     IRPManager uses it to pace the return of Alarm Informations. IRPManager
     cannot use it to pace when IRPAGent should retrieve Alarm Informations
     from Alarm List.
    */

    interface AlarmInformationIterator {

        /**
         This method returns up to "how_many" Alarm Informations.
         If 1 or more Alarm Information is returned, return TRUE.
         Return FALSE if there is no more Alarm Information to be returned.
        */

        boolean next_alarmInformations (
            in unsigned long how_many,
            out AlarmIRPCConstDefs::AlarmInformationSeq alarm_informations
        )
        raises (NextAlarmInformations,InvalidParameter);

        /**
         This method destroys the iterator.
        */

        void destroy ();
    }
}

```

```

}; // end of AlarmInformationIterator

/*
This interface specifies all methods supported by System as
specified in 3GPP AlarmIRP: CORBA Solution Set version 1:1.
*/

interface AlarmIRPOperations {

    CommonIRPConstDefs::Signal acknowledge_alarms (
        in AlarmIRPConstDefs::AlarmInformationIdSeq alarm_information_id_list,
        in string ack_user_id,
        in string ack_system_id,
        out AlarmIRPConstDefs::AlarmInformationIdSeq
            bad_alarm_information_id_list
    )
    raises (AcknowledgeAlarms, ParameterNotSupported, InvalidParameter);

    CommonIRPConstDefs::Signal unacknowledge_alarms (
        in AlarmIRPConstDefs::AlarmInformationIdSeq alarm_information_id_list,
        in string ack_user_id,
        in string ack_system_id,
        out AlarmIRPConstDefs::AlarmInformationIdSeq
            bad_alarm_information_id_list
    )
    raises (UnacknowledgeAlarms, OperationNotSupported, ParameterNotSupported,
           InvalidParameter);

    /*
    This method returns Alarm Informations.
    If flag is TRUE, all returned Alarm Informations shall be
    in AlarmInformationSeq that contains 0,1 or more Alarm Informations.
    Output parameter iter shall be useless.
    If flag is FALSE, no Alarm Informations shall be in AlarmInformationSeq.
    IRPAGent needs to use iter to retrieve them.
    */
    AlarmIRPConstDefs::AlarmInformationSeq get_alarm_list (
        in string filter,
        out boolean flag,
        out AlarmInformationIterator iter
    )
    raises (GetAlarmList, ParameterNotSupported, InvalidParameter);

    void get_alarm_count (
        in string filter,
        out long critical_count,
        out long major_count,
        out long minor_count,
        out long warning_count,
        out long indeterminate_count,
        out long cleared_count
    )
    raises (GetAlarmCount, OperationNotSupported, ParameterNotSupported,
           InvalidParameter);

    CommonIRPConstDefs::VersionNumberSet get_alarm_IRP_version ()
        raises (GetAlarmIRPVersion);
};

};

#endif

```

Annex B (informative): Change history

Change history					
TSG SA#	Version	CR	Tdoc SA	New Version	Subject/Comment
S_07	2.0.0	-	SP-000012	3.0.0	Approved at TSG SA #7 and placed under Change Control
Mar 2000	3.0.0			3.0.1	cosmetic
S_08	3.0.1	005	SP-000253	3.1.0	Split of TS - Part 3: Alarm Integration Reference Point (IRP): CORBA Solution Set (SS)

History

Document history		
V3.0.1	March 2000	Publication as TS 132 111
V3.1.0	July 2000	Publication