

# ETSI TS 132 150 V17.0.0 (2022-04)



**Digital cellular telecommunications system (Phase 2+) (GSM);  
Universal Mobile Telecommunications System (UMTS);  
LTE;  
Telecommunication management;  
Integration Reference Point (IRP)  
Concept and definitions  
(3GPP TS 32.150 version 17.0.0 Release 17)**



---

**Reference**

RTS/TSGS-0532150vh00

---

**Keywords**

GSM,LTE,UMTS

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our  
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

|  |           |
|--|-----------|
| Intellectual Property Rights .....   | 2         |
| Legal Notice .....   | 2         |
| Modal verbs terminology.....   | 2         |
| Foreword.....  | 4         |
| Introduction .....   | 4         |
| 1 Scope .....  | 5         |
| 2 References .....   | 5         |
| 3 Definitions and abbreviations.....   | 6         |
| 3.1 Definitions .....  | 6         |
| 3.2 Abbreviations .....  | 7         |
| 4 Integration Reference Points (IRPs).....                                     | 8         |
| 4.1 Introduction .....   | 8         |
| 4.1.1 General.....   | 8         |
| 4.1.2 IRP Specifications Approach.....   | 9         |
| 4.2 Integration levels .....   | 10        |
| 4.2.1 Application integration .....  | 10        |
| 4.3 Application of IRPs .....  | 11        |
| 4.4 Defining the IRPs .....  | 12        |
| 4.5 Void.....  | 12        |
| 4.6 Mandatory, Optional and Conditional qualifiers .....                       | 13        |
| 4.7 System context for Interface IRPs.....                                     | 15        |
| 4.8 Object instance visibility .....   | 16        |
| <b>Annex A (informative): Void .....</b>                                       | <b>17</b> |
| <b>Annex B (normative): Void .....</b>   | <b>18</b> |
| <b>Annex C (informative): Void .....</b>                                       | <b>19</b> |
| <b>Annex D (informative): Void .....</b>                                       | <b>20</b> |
| <b>Annex E (normative): Void .....</b>   | <b>21</b> |
| <b>Annex F (informative): Void .....</b>                                       | <b>22</b> |
| <b>Annex G (normative): IOC Properties and Inheritance.....</b>                | <b>23</b> |
| G.1 Property .....   | 23        |
| G.2 Inheritance.....   | 24        |
| <b>Annex H (normative): Interface Properties and Inheritance.....</b>          | <b>25</b> |
| H.1 Property .....   | 25        |
| H.2 Inheritance.....   | 25        |
| <b>Annex I (normative): Entity (Interface, IOC and Attribute) Import .....</b> | <b>26</b> |
| <b>Annex K (informative): Change history .....</b>                             | <b>27</b> |
| History .....  | 28        |

---

# Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# Introduction

The present document is part of a TS-family covering the 3<sup>rd</sup> Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication management; as identified below:

**TS 32.150: Integration Reference Point (IRP) Concept and definitions.**

TS 32.153: Integration Reference Point (IRP) technology specific templates.

TS 32.154: Backward and Forward Compatibility (BFC); Concept and definitions.

TS 32.155: Telecommunication management; Requirements template.

TS 32.156: Telecommunication management; Fixed Mobile Convergence (FMC) Model Repertoire.

TS 32.157: Telecommunication management; Integration Reference Point (IRP) Information Service (IS) template.

---

# 1 Scope

The present document provides the overall concept for all Integration Reference Point (IRP) specifications. Relevant IRP overview and high-level definitions are already provided in 3GPP TS 32.101 [1] and TS 32.102 [2].

IRP specifications are intended to be applicable to any management interface (see definition of Integration Reference Point in subclause 3.1).

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".
- [2] 3GPP TS 32.102: "Telecommunication management; Architecture".
- [3] Void.
- [4] Void.
- [5] ITU-T Recommendation M.3020 (05/2009): "TMN Interface Specification Methodology".
- [6] OMG IDL Style Guide, ab/98-06-03, June 17, 1998.
- [7] 3GPP TS 32.111-2: "Telecommunication management; Fault Management; Part 2: Alarm Integration Reference Point: Information Service (IS)".
- [8] 3GPP TS 32.601: "Telecommunication management; Configuration Management (CM); Basic CM Integration Reference Point (IRP); Requirements".
- [9] 3GPP TS 32.602: "Telecommunication management; Configuration Management (CM); Basic CM Integration Reference Point (IRP): Information Service (IS)".
- [10] 3GPP TS 32.606: "Telecommunication management; Configuration Management (CM); Basic CM Integration Reference Point (IRP); Solution Set (SS) definitions".
- [11] 3GPP TS 28.621: "Telecommunication management; Generic Network Resource Model (NRM) Integration Reference Point (IRP); Requirements".
- [12] 3GPP TS 28.622: "Telecommunication management; Generic Network Resource Model (NRM) Integration Reference Point (IRP) ; Information Service (IS)".
- [13] 3GPP TS 28.623: "Telecommunication management; Generic Network Resource Model (NRM) Integration Reference Point (IRP) ; Solution Set (SS) definitions".
- [14] 3GPP TS 28.624: "Telecommunication management; State Management Data Definition Integration Reference Point (IRP) ; Requirements".
- [15] 3GPP TS 28.625: "Telecommunication management; State Management Data Definition Integration Reference Point (IRP) ; Information Service (IS)".
- [16] 3GPP TS 28.626: "Telecommunication management; State Management Data Definition Integration Reference Point (IRP); Solution Set (SS) definitions".

- [17] 3GPP TS 32.107: "Fixed Mobile Convergence (FMC) Federated Network Information Model (FNIM) ".
- [18] 3GPP TS 32.156: " Fixed Mobile Convergence (FMC) Model Repertoire".
- [19] 3GPP TS 32.157: " Integration Reference Point (IRP) Information Service (IS) template".
- [20] 3GPP TS 28.620: " Fixed Mobile Convergence (FMC) Federated Network Information Model (FNIM) Umbrella Information Model (UIM) ".

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TS 32.101 [1], 3GPP TS 32.102 [2], 3GPP TS 32.107 [17], 3GPP TS 32.157 [19], 3GPP TS 28.620 [20] and the following apply:

**Data Definition IRP:** 3GPP publishes IRP specifications relating to commonly used data definitions that can be imported for use by Interface IRP and/or NRM IRP. This term represents all such specifications.

NOTE 1: An example of a Data Definition IRP is the State Management IRP (32.671 [14], 32.672 [15], 32.676 [16]).

**Information Object Class (IOC):** information that can be passed/used in management interfaces and is modelled using the stereotype "Class" in the UML meta-model. For a formal definition of Information Object Class and its structure of specification, see 3GPP TS 32.157[19].

**Integration Reference Point (IRP):** An architectural concept that is described by a set of specifications for definition of a certain aspect of a management interface, comprising a **Requirements** specification, an **Information Service** specification, and one or more **Solution Set** specifications.

**Interface IRP:** 3GPP publishes a number of IRP specifications each of which is related to a set of operations and notifications for a specific telecom management domain such as alarm management, configuration management, etc. Interface IRPs also contain definitions of SupportIOCs. This term represents all such specifications.

NOTE 2: An example of an Interface IRP is the Basic CM IRP (the set of TSs 32.601 [8], 32.602 [9], 32.606 [10]).

**IRPAgent:** Encapsulation of a well-defined subset of network (element) functions. It interacts with IRPManagers using one or more IRPs. From the IRPManager's perspective, the IRPAgent behaviour is only visible via the IRP(s).

**Information Service (IS):** description of the information related to the entities (either network resources or support objects) to be managed and the way that the information may be managed for a certain functional area (e.g. the Alarm IRP Information Service in the fault management area). Information Services are defined for all IRPs.

**IRPManager:** Modeling of a user of IRPAgent(s) which interacts directly with the IRPAgent(s) using IRP(s). Since the IRPManager represents an IRPAgent user, it gives a clear picture of what the IRPAgent is supposed to do. From the IRPAgent perspective, the IRPManager behaviour is only visible via the IRP.

**Managed Object Class (MOC):** information that can be passed/used in management interfaces in a similar way to IOC.

NOTE 3: See subclause 7.3.4.3 of [5] on Guidelines for definitions of Managed Object.

**Network Resource Model (NRM):** description of Information Object Classes representing the manageable aspects of network resources.

NOTE 4: Examples of network resources are RNC and NodeB.

**NRM IRP:** 3GPP publishes a number of IRP specifications each of which is related to a particular NRM (Network Resource Model) as defined in 3GPP TS 32.101 [1]. NRM IRPs do not define any operations or notifications. This term represents all such specifications.

NOTE 5: In some NRM IRP titles, for historic reasons, they are named "...network resources IRP").

NOTE 6: An example of an NRM IRP is the Generic NRM IRP (32.621 [11], 32.622 [12], 32.626 [13]).

**Solution Set (SS):** mapping of the IRP Information Service (IS) defined entities (that are technology-agnostic) to technology specific termed entities.

NOTE7: SS does not contain specification of the entities' semantics which can be found in the corresponding IS. One IS can be mapped to one or several SSs.

NOTE 8: Examples of an IS defined entity and technology specific termed entity are IOC and MOC respectively.

**SupportIOC:** representation of a particular capability, introduced to model a management service.

NOTE 9: As an example of SupportIOC, in the Alarm IRP Information Service [59] there are the AlarmInformation and AlarmList IOCs.

NOTE 10: See Annex F of [18] for information about the difference between IOC and SupportIOC.

**Yyy IRP:** For a specific Interface IRP such as the Basic CM IRP, when the letters Yyy are replaced by the specific key words naming that IRP (in the given example the Yyy is replaced by "Basic CM"), this term represents all specifications that are part of that Interface IRP.

## 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TS 32.101 [1], 3GPP TS 32.102 [2], 3GPP TS 32.157 [19] and the following apply:

|       |  |
|-------|--|
| CORBA | Common Object Request Broker Architecture        |
| EM    | Element Manager                                  |
| GDMO  | Guidelines for the Definition of Managed Objects |
| GUI   | Graphical User Interface                         |
| IDL   | Interface Definition Language                    |
| IOC   | Information Object Class                         |
| IRP   | Integration Reference Point                      |
| IS    | Information Service                              |
| MOC   | Managed Object Class                             |
| NE    | Network Element                                  |
| NM    | Network Manager                                  |
| NRM   | Network Resource Model                           |
| OMG   | Object Management Group                          |
| ORB   | Object Request Broker                            |
| PSA   | Product Specific Application                     |
| SMP   | System Management Processes                      |
| SNM   | Sub-Network Manager                              |
| SS    | Solution Set                                     |
| TMF   | TeleManagement Forum                             |
| TOM   | Telecom Operations Map                           |
| UML   | Unified Modelling Language                       |



## 4 Integration Reference Points (IRPs)

### 4.1 Introduction

For the purpose of management interface development 3GPP has developed an interface concept known as Integration Reference Point (IRP) to promote the wider adoption of standardized management interfaces in telecommunication networks. The IRP concept and associated methodology employs protocol and technology neutral modelling methods as well as protocol specific solution sets to achieve its goals.

#### 4.1.1 General

The three cornerstones of the IRP concept are:

- **Top-down, process-driven modelling approach:** The purpose of each IRP is automation of one specific task, related to TMF TOM. This allows taking a "one step at a time" approach with a focus on the most important tasks.
- **Technology-independent modelling:** To create from the requirements an interface technology independent model. This is specified in the IRP Information Service.
- **Standards-based technology-dependent modelling:** To create one or more interface technology dependent models from the technology independent model. This is specified in the IRP Solution Set(s).

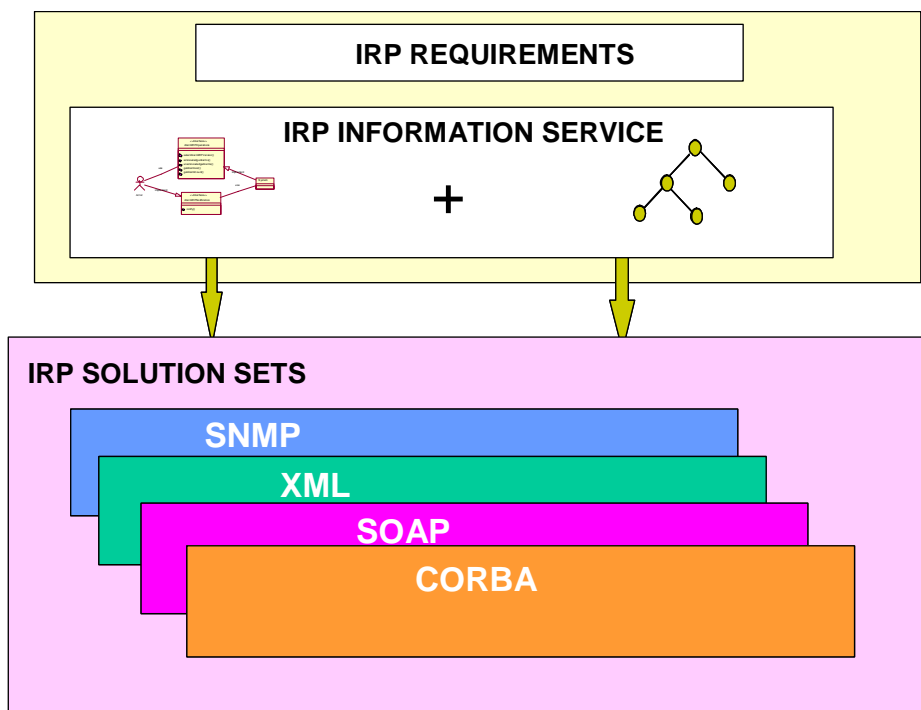


Figure 4.1: IRP components (with example Solution Sets; for definition of valid 3GPP Solution Sets, see Annex C in TS 32.101 [1])


## 4.1.2 IRP Specifications Approach

As highlighted in the previous subclause, IRP specifications are specified using a 3-level approach: Requirements, IS-level and SS-level.

Furthermore, there are three categories of IRP specifications (see formal and more detailed definitions in subclause 3.1):

- Interface IRPs
- NRM IRPs
- Data Definition IRPs.

Each category is partitioned into Requirements, IS-level and SS-level specifications.

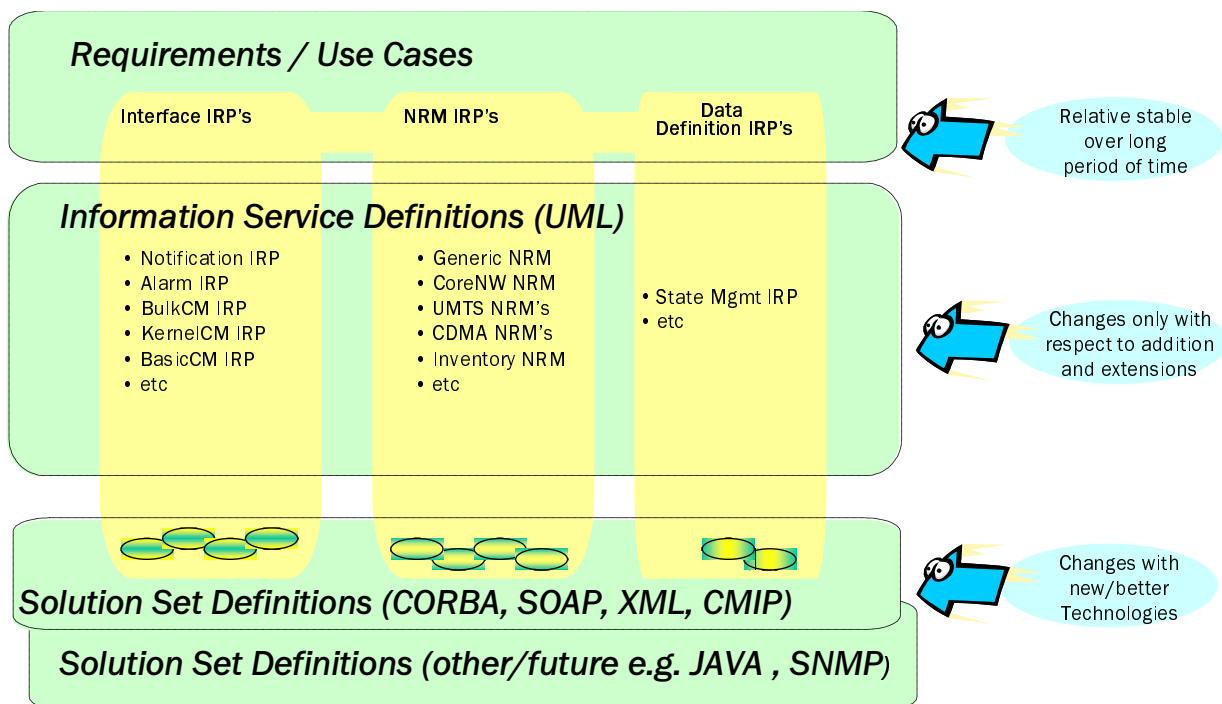

**Figure 4.2: The IRP 3-Level Specifications Approach combined with the three IRP categories.**

### Level 1:

The "Requirements-level" intends to provide conceptual and use cases definitions for a specific management interface aspect as well as defining subsequent requirements for this IRP.

### Level 2:

The "IS-level" provides the technology independent specification of an IRP.

### Level 3:

The "SS-level" finally provides the mapping of IS definitions into one or more technology-specific Solution Sets. This concept provides support for multiple interface technologies as applicable on a vendor and/or network type basis and also enables accommodation of future interface technologies - without the need to redefine requirements and IS-level definitions.

### Usage of terms:

The term IOC and SupportIOC are used in IS-level specification. The term MOC is used in SS-level specifications and it corresponds to IOC or SupportIOC defined in IS-level specification. This term MOC is a term defined by ITU-T M.series Recommendations. See subclause 7.3.4.3 of [5] on Guidelines for definitions of Managed Object, for information.

## 4.2 Integration levels

Virtually all types of telecom/datacom networks comprise many different technologies purchased from several different vendors. This implies that the corresponding management solution need to be built by integrating product-specific applications from different vendors with a number of generic applications that each provide some aspect of multi-vendor and/or multi-technology support. A complete management solution is thus composed of several independent applications.

The following levels of integration are defined:

- **Screen Integration:** Each application provides its own specific Graphical User Interface (GUI) that need to be accessible from a single, unified screen (a common desktop). A seamless integration between the various GUIs is then required. Screen Integration is not specified in the present document.
- **Application Integration:** Applications need to interwork, on a machine-machine basis, in order to automate various end-to-end processes of a communication provider.

### 4.2.1 Application integration

Interfaces related to application integration can be divided in the following three categories:


- 1) **High-level generic interfaces:** between generic applications on the network and service management layers. The same approach and concepts apply for these as the next category.
- 2) **High-level (technology-independent to the extent possible) interfaces:** between product-specific and generic applications are needed in order to automate and streamline frequently occurring tasks applicable to several types of network elements. A top-down approach shall be taken when defining these interfaces, where the main input is:
  - a) business processes of a communication provider; and
  - b) the types of generic applications that are used to implement the process support.
- 3) **Detailed (product-specific) interfaces:** between product-specific applications and the corresponding network elements are of course also needed. These interfaces are defined using the traditional bottom-up approach, where the actual network infrastructure is modelled. This is the traditional TMN approach to element management. The management information in these interfaces is not further discussed in the present document, as it is internal to a specific development organization and does not need to be open. In fact, by publishing the management information in these interfaces, too much of the internal design may be revealed and it may become impossible to later enhance the systems that are using the interfaces. The management services (operations and notifications) and protocol shall however be open and standardized as long as they are independent of the NRM describing the managed NEs/NRs.

### 4.3 Application of IRPs

When providing integrated management solutions for multi-vendor networks, there is a strong requirement that the NEs and the management solutions that go together with them are systems integratable.

It should be noted that these IRPs could be provided by an IRP Agent on any management interface.

These IRPs are introduced to ensure interoperability, for example between Product-Specific Applications (PSA) and the Network and System Management Processes (SMP) of the Network Manager (NM) - see figure 4.3 from TS 32.101 [1]. These IRPs are considered to cover the most basic needs of task automation.

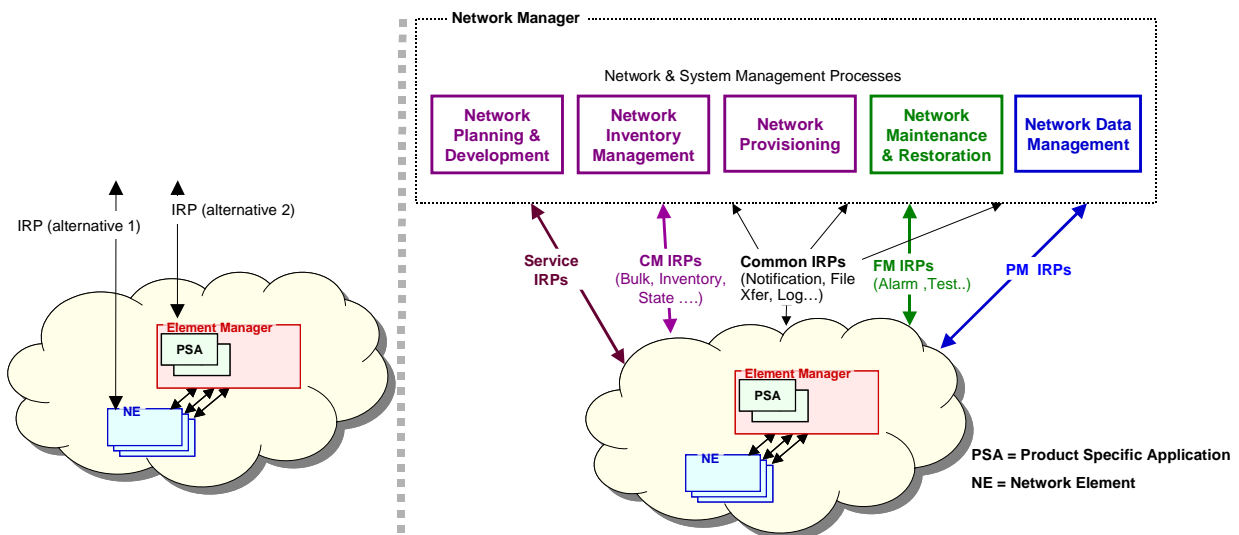

**Figure 4.3: Examples of IRPs for application integration**

Taking one of the above mentioned IRPs as an example, the Network and System Management Processes have similar need to receive notifications from various PSAs. The corresponding service is formalized as a *Notification IRP*. It specifies: firstly, an interface through which subscriptions to different types of notifications can be set-up (or cancelled), and secondly, common attributes for all notifications.

Further, applying a common *Name Convention for Managed Objects* is useful for co-operating applications that require identical interpretation of names assigned to network resources under management.

## 4.4 Defining the IRPs

It is important to accommodate more than one specific technology, as the technologies will change over time. Applications need to be future-proof. One fundamental principle for achieving this is to clearly separate the semantics of information definition from the protocols definitions (accessing the information) for the external interfaces.

The framework being used to define IRPs allows the implementation of user requirements for each management capability (e.g. configuration management), by modelling the information related to the resources to be managed and the way that the information may be accessed and manipulated. Such modelling is done in a way that is independent of the technology and distribution used in the implementation of a management system.

The IRP methodology uses the following steps:

- a) Capture the management requirements.
- b) Specify the semantics of the information to describe the system. Trace back to item (a).
- c) Specify the semantics of the interactions between the management system and its clients. Trace back to item (a).
- d) Specify the syntaxes of the information and interactions identified in (b) and (c). The specification is technology dependent. Trace back to items (b) and (c).

Figure 4.4 shows an example of how an IRP can be structured (the Alarm IRP).

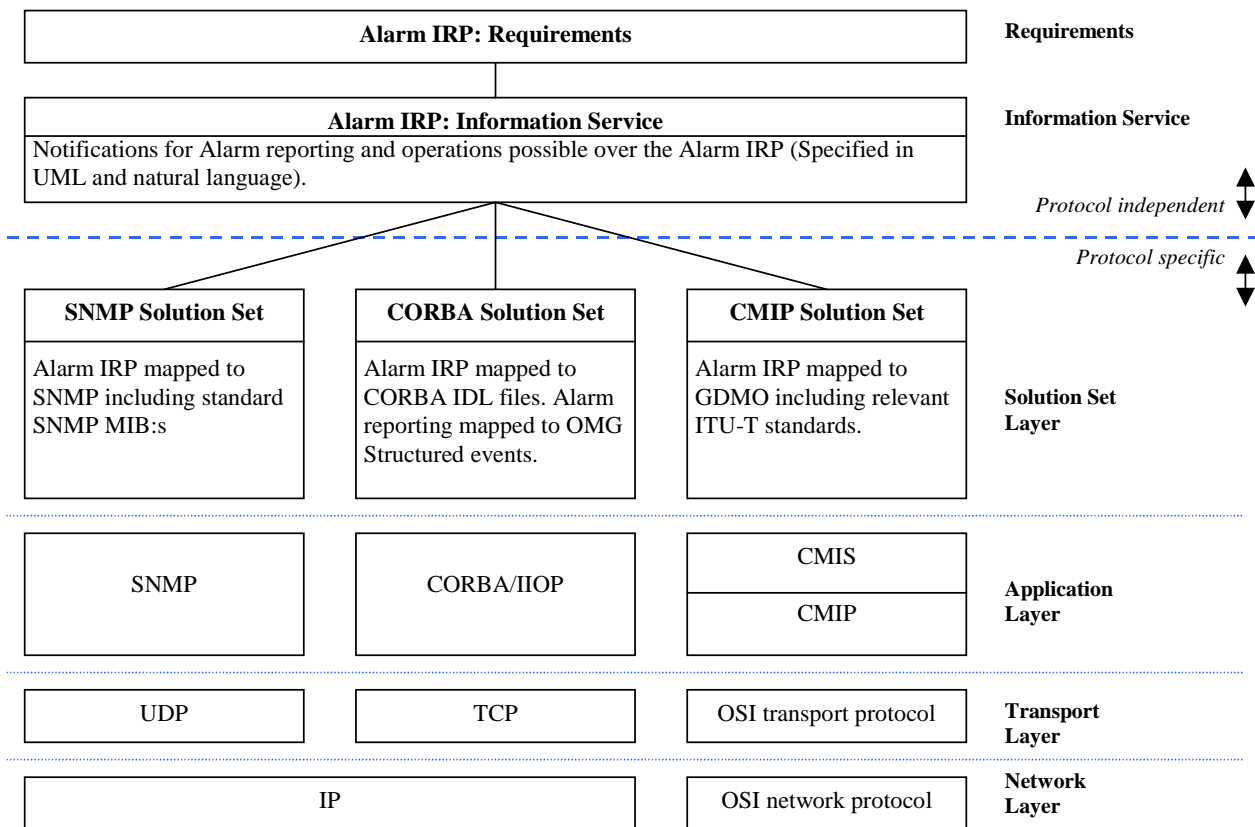


Figure 4.4: Example of an IRP (Alarm IRP)

## 4.5 Void

## 4.6 Mandatory, Optional and Conditional qualifiers

Note: Void.

This subclause defines a number of terms used to qualify the relationship between the Information Service, the Solution Sets and their impact on the IRP implementations. The qualifiers defined in this clause are used to qualify IRP Agent behaviour only. This is considered sufficient for the specification of the IRPs.

Additional qualifier definitions are specified in 3GPP TS 32.156 “Model Repertoire” [18].

IS specifications define IOC attributes, interfaces, operations, notifications, operation parameters and notification parameters. They can have the following support/read/write qualifiers: M, O, CM, CO, C.

Definition of qualifier M (Mandatory):

- Used for items that shall be supported.

Definition of qualifier O (Optional):

- Used for items which may or may not be supported.

Definition of qualifier CM (Conditional-Mandatory):

- Used for items that are mandatory under certain conditions, specifically:
  - All items having the support qualifier CM shall have a corresponding constraint defined in the IS specification. If the specified constraint is met then the items shall be supported. Definition of qualifier CO (Conditional-Optional):
- Used for items that are optional under certain conditions, specifically:
  - All items having the support qualifier CO shall have a corresponding constraint defined in the IS specification. If the specified constraint is met, then the items may be supported.

Definition of qualifier C (SS-Conditional):

- Used for items that are only applicable for certain but not all Solutions Sets (SSs).

SS specifications define the SS-equivalents of the IS-defined IOC attributes, operations, notifications, operation parameters and notification parameters. These SS-equivalents can have the following support/read/write qualifiers: M, O, CM and CO.

The mapping of the qualifiers of IS-defined constructs to the qualifiers of the corresponding SS-constructs is defined as follows:

- For qualifier M, O, CM and CO, each IS-defined item (operation and notification, input and output parameter of operations, input parameter of notifications, information relationship and information attribute) shall be mapped to its equivalent(s) in all SSs. Mapped equivalent(s) shall have the same qualifier as the IS-defined qualifier.
- For qualifier C, each IS-defined item shall be mapped to its equivalent(s) in at least one SS. Mapped equivalent(s) can have support qualifier M or O.

Table 4.6 defines the semantics of qualifiers of the Interface IRP SS equivalents, in terms of support from the IRPAgent perspective.

**Table 4.6: Semantics for Mandatory, Optional and Conditional qualifiers used in Solution Sets**

| Mapped SS Equivalent  | Mandatory  | Optional  | Conditional-Mandatory (CM)  | Conditional-Optional (CO)  |
|---|--|---|---|--|
| Mapped notification equivalent  | The IRPAgent shall generate the notification.                | The IRPAgent may or may not generate it.  | The IRPAgent shall generate this notification if the constraint described in the IS for this item is satisfied.               | The IRPAgent may choose whether or not to generate it. If the IRPAgent chooses to generate it, the constraint described in the IS for this notification must be satisfied. |
| Mapped operation equivalent   | The IRPAgent shall support it.                               | The IRPAgent may or may not support this operation. If the IRPAgent does not support this operation, the IRPAgent shall reject the operation invocation with a reason indicating that the IRPAgent does not support this operation. The rejection, together with a reason, shall be returned to the IRPManager.   | The IRPAgent shall support this operation if the constraint described in the IS for this item is satisfied.                   | The IRPAgent may support this operation if the constraint described in the IS for this item is satisfied.  |
| Input parameter of the mapped operation equivalent  | The IRPAgent shall accept and behave according to its value. | The IRPAgent may or may not support this input parameter. If the IRPAgent does not support this input parameter and if it carries meaning (i.e. it does not carry no-information semantics), the IRPAgent shall reject the invocation with a reason (that it does not support the parameter). The rejection, together with the reason, shall be returned to the IRPManager. | The IRPAgent shall accept and behave according to its value if the constraint described in the IS for this item is satisfied. | The IRPAgent may accept and behave according to its value if the constraint described in the IS for this item is satisfied.  |
| Input parameter of mapped notification equivalent AND output parameter of mapped operation equivalent | The IRPAgent shall supply this parameter.                    | The IRPAgent may supply this parameter.   | The IRPAgent shall supply this parameter if the constraint described in the IS for this item is satisfied.                    | The IRPAgent may supply this parameter if the constraint described in the IS for this item is satisfied.   |
| Mapped IOC attribute equivalent   | The IRPAgent shall support it.                               | The IRPAgent may support it.  | The IRPAgent shall support this attribute if the constraint described in the IS for this item is satisfied.                   | The IRPAgent may support this attribute if the constraint described in the IS for this item is satisfied.  |


## 4.7 System context for Interface IRPs

Every Interface IRP on a management interface (e.g. Alarm IRP, Notification IRP, Basic CM IRP, Bulk CM IRP) is subject to a System Context as described in this subclause (also consistent with 3GPP TS 32.102 [2] clause 8).


Figure 4.7.1 and 4.7.2 identify system contexts of the Interface IRP in terms of its implementation, called IRPAgent, and the user of the IRPAgent, called IRPManager.

Each IRPAgent implements and supports one or more IRPs. The set of IRPs that is related to each Interface IRP is defined by the System Context subclause in each individual Interface IRP IS specification, e.g. subclause 4.2 in the Alarm IRP IS [7].

An NE can be managed via System Context A or B. The criterion for choosing System Context A or B to manage a particular NE is implementation dependent. An IRPAgent shall support one of the two System Contexts. By observing the interaction across the management interface, an IRPManager cannot deduce if the EM and NE are integrated in a single system or if they run in separate systems.

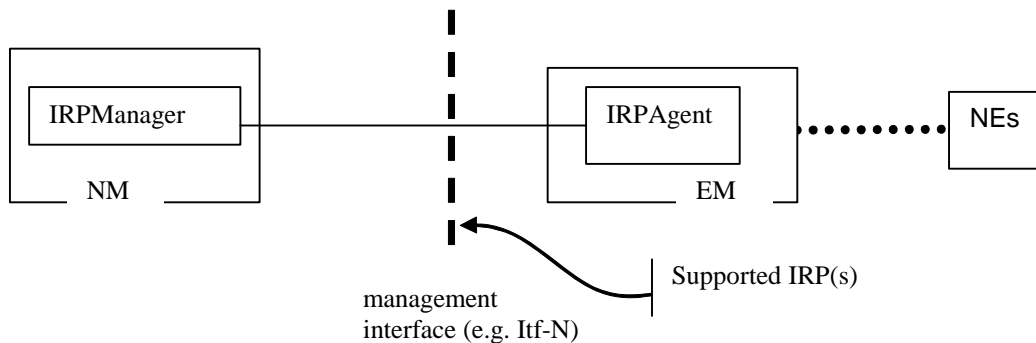

**Figure 4.7.1: System Context A**

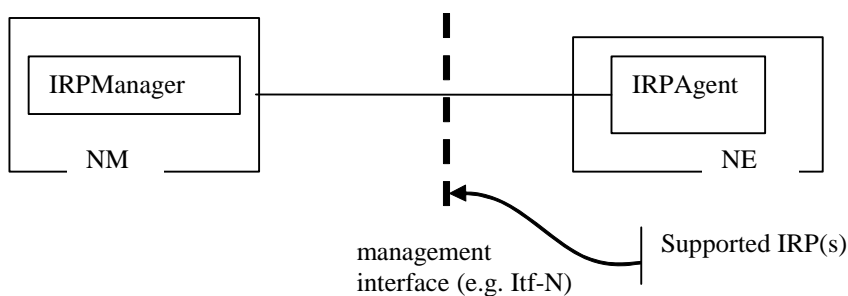

**Figure 4.7.2: System Context B**

An entity can play the consumer role for some operations/notifications and the producer role for other operations/notifications of the same Interface IRP. A diagram shall contain the direction of the operations and notifications per operation and notification.

Examples of when the entities can play the role of both consumer and producer are depicted in Figures 4.7.3.



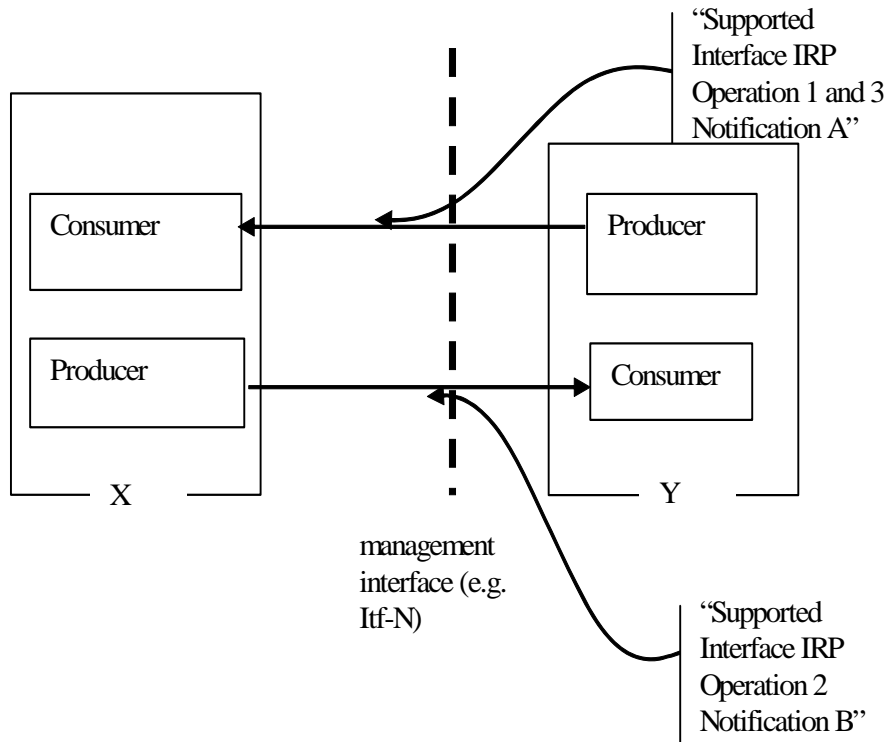


Figure 4.7.3: Example for entities that can have several roles

## 4.8 Object instance visibility

Via the management interface, IRPAgent provides IRPManager visibility of the various object instances, i.e. the information captured by various IOC instances can be passed between IRPManager and IRPAgent. See Annex F of [18].

# Annex A (informative): Void

Annex B (normative):  
Void

## Annex C (informative): Void

## Annex D (informative): Void

Annex E (normative):  
Void

Annex F (informative):  
Void

---

# Annex G (normative): IOC Properties and Inheritance

## G.1 Property

The properties of an IOC (including SupportIOC) are specified in terms of the following:

- a) An IOC attribute(s) including its semantics and syntax, its legal value ranges and support qualifications. The IOC attributes are not restricted to Configuration Management but also include those related to, for example, 1) Performance Management (i.e., measurement types), 2) Trace Management and 3) Accounting Management.
- b) The non-attribute-specific behaviour associated with an IOC (see Note 1).

NOTE 1: As an example, the Link between MscServerFunction and CsMgwFunction is optional. It is mandatory if the MscServerFunction instance belongs to one ManagedElement instance while the CsMgwFunction instance belongs to another ManagedElement instance. This Link behaviour is a non-attribute-specific behaviour. It is expected that this behaviour, like others, will be inherited.

- c) An IOC relationship(s) with another IOC(s).
- d) An IOC notification type(s) and their qualifications.
- e) An IOC's relation with its parents (see Note 2). There are three mutually exclusive cases:
  - 1) The IOC can have any parent. In UML diagram, the class has a parent Any.
  - 2) The IOC is abstract and all of the possible parent(s) have been designated and whether subclass IOCs can be designated as a root IOC. In UML diagram, the class has zero or more possible parents of specific classes (except Any) .
  - 3) The IOC is concrete and all of the possible parent(s) have been designated and whether the IOC can be designated as a root IOC. In UML diagram, the class has one or more possible parents of specific classes (except Any . )

An IOC instance is either a root IOC or it has one and only one parent. Only 3GPP SA5 may designate an IOC class as a potential root IOC. Currently, only SubNetwork, ManagedElement or MeContext IOCs can be root IOCs.

NOTE 2: The parent and child relation in this clause is the parent name-containing the child relation.

- f) An IOC's relation with its children. There are three mutually exclusive cases:
  - 1) An IOC shall not have any children (name-containment relation) IOCs. In UML diagram, the class has no child.
  - 2) An IOC can have children IOC(s). The maximum number of instances per children IOC (including their subclasses) can be specified. An IOC may designate that vendor specific objects are not allowed as children IOCs. In UML diagram, the class has a child Any .
  - 3) An IOC can only have the specific children IOC(s) (or their subclasses). The maximum number of instances per children IOC (including their subclasses) can be specified. An IOC may designate that vendor specific objects are not allowed as children IOCs. In UML diagram, the class has one or more children of specific classes (except Any) .
- g) Whether An IOC can be instantiated or not (i.e., whether An IOC is an abstract IOC).
- h) An attribute for naming purpose.



---

## G.2 Inheritance

An IOC (the subclass) inherits from another IOC (the superclass) in that the subclass shall have all the properties of the superclass.

The subclass can change the inherited support-qualification(s) from optional to mandatory but not vice versa. The subclass can change the inherited support-qualification from conditional-optional to conditional-mandatory but not vice versa.

An IOC can be a superclass of many IOC(s). A subclass cannot have more than one superclass.

The subclass can:

- a) Add (compared to those of its superclass) unique attributes including their behaviour, legal value ranges and support-qualifications. Each additional attribute shall have its own unique attribute name (among all added and inherited attributes).
- b) Add non-attribute behaviour on an IOC basis. This behaviour may not contradict inherited superclass behaviour.
- c) Add relationship(s) with IOC(s). Each additional relationship shall have its own unique name (among all added and inherited relations).
- d) Add additional notification types and their qualifications.
- e) Designate all of the possible parent(s) (and their subclasses) if the superclass has Property-e-1 such that an IOC will have Property-e-2 or Property-e-3. Restrict possible parent(s) (and their subclasses) and/or remove the capability of the subclass from being a root IOC, if the superclass has Property-e-2 or Property-e-3.
- f) Add children IOC(s) if the superclass has Property-f-2 such that an IOC will have Property-f-3. Restrict the allowed children IOC(s) (or their subclasses) if the superclass has Property-f-3.
- g) Specify whether an IOC can be instantiated or not (i.e. the IOC is an abstract IOC).
- h) Restrict the legal value range of a superclass attribute that has a legal value range.

---

## Annex H (normative): Interface Properties and Inheritance

### H.1 Property

To be defined.

---

### H.2 Inheritance

To be defined.

---

## Annex I (normative): Entity (Interface, IOC and Attribute) Import

IRP specifications define entities (e.g., IOCs, interfaces and attribute). To facilitate re-use of entity definitions among IRP specifications, an import mechanism is used. When an IRP specification (the subject IRP specification) imports an entity defined in another IRP specification, the subject IRP specification is considered to have defined the imported entity in its specification. Furthermore, the subject IRP specification cannot change the properties of this imported entity. If it requires an entity that is not identical but similar to the imported entity, it should define a new entity that inherits the imported entity and introduce changes in the new entity definition.

## Annex K (informative): Change history

| Change history |       |           |      |     |  |                                |        |               |
|----------------|-------|-----------|------|-----|--|--------------------------------|--------|---------------|
| Date           | TSG # | TSG Doc.  | CR   | Rev | Subject/Comment  | Cat                            | Old    | New           |
| Mar 2006       | SP-31 | SP-060099 | 0006 | --  | Extension/Generalization of the IRP definition and concept (OAM7-NIM-NGN)                            | C                              | 6.5.0  | 7.0.0         |
| Dec 2006       | SP-34 | SP-060723 | 0007 | --  | Correct existing definitions of the IRPs and gather all IRP-related definitions                      | F                              | 7.0.0  | 7.1.0         |
| Jan 2007       | --    | --        | --   | --  | Editorial: added two returns in 3.1 Definitions  | --                             | 7.1.0  | 7.1.1         |
| Mar 2007       | SP-35 | SP-070045 | 0008 | --  | Delete the incorrect reference   | F                              | 7.1.1  | 7.2.0         |
| Jun 2007       | SP-36 | SP-070309 | 0009 | --  | Identify the use case of XSD schema  | B                              | 7.2.0  | 8.0.0         |
| Jun 2007       | SP-36 | SP-070309 | 0010 | --  | Add IOC Property Inheritance and Import definitions  | B                              | 7.2.0  | 8.0.0         |
| Mar 2008       | SP-39 | SP-080058 | 0012 | --  | Generalization of the IRP definition for NGN management - Align with 32.101 and TISPAN               | A                              | 8.0.0  | 8.1.0         |
| Jun 2008       | SP-40 | SP-080329 | 0013 | --  | Remove CMIP and add SOAP reference as supported technology for IRP Solution Sets - Align with 32.101 | F                              | 8.1.0  | 8.2.0         |
| Mar 2009       | SP-43 | SP-090207 | 0014 | --  | Remove parts moved to 32.153   | F                              | 8.2.0  | 8.3.0         |
| Dec 2009       | --    | --        | --   | --  | Update to Rel-9 version (MCC)  | -                              | 8.3.0  | 9.0.0         |
| Mar 2010       | SP-47 | SP-100035 | 0015 | --  | Introduce the use of ProxyClass Any to represent parent and child relation property of IOC           | F                              | 9.0.0  | 9.1.0         |
| Jun 2010       | SP-48 | SP-100264 | 0016 | --  | Move common definitions from TS 32.600 and clarify SS definition                                     | F                              | 9.1.0  | 10.0.0        |
| Sep 2010       | SP-49 | SP-100488 | 0017 | --  | Clarification on the meaning of the imported entities  | A                              | 10.0.0 | 10.1.0        |
| Mar 2011       | SP-51 | SP-110103 | 0019 | 1   | Reference updates related to IRP SS Improvements WID   | D                              | 10.1.0 | 10.2.0        |
| 2012-09        | -     | -         | -    | -   | -  | Update to Rel-11 version (MCC) | 10.2.0 | <b>11.0.0</b> |
| 2012-12        | SP-58 | SP-120797 | 0021 | -   | CR R11 32150 on class property   | F                              | 11.0.0 | <b>11.1.0</b> |
| 2012-12        | SP-58 | SP-120799 | 0022 | 1   | R11 CR 32.150 on Enhancements for Converged Management   | B                              | 11.0.0 | <b>11.1.0</b> |
| 2013-03        | SP-59 | SP-130048 | 0023 | 1   | Correct spelling of 'SupportIOC'   | F                              | 11.1.0 | <b>11.2.0</b> |
| 2014-06        | SP-64 | SP-140359 | 0024 | -   | remove the feature support statements  | F                              | 11.2.0 | <b>11.3.0</b> |
| 2014-10        | -     | -         | -    | -   | Update to Rel-12 version (MCC)   |                                | 11.3.0 | <b>12.0.0</b> |
| 2016-01        | -     | -         | -    | -   | Update to Rel-13 version (MCC)   |                                | 12.0.0 | <b>13.0.0</b> |
| 2016-03        | SP-71 | SP-160030 | 0001 | -   | Add missing link to properties of SupportIOC instance  | F                              | 13.0.0 | <b>13.1.0</b> |

| Change history |         |           |      |     |     |  |               |
|----------------|---------|-----------|------|-----|-----|--|---------------|
| Date           | Meeting | TDoc      | CR   | Rev | Cat | Subject/Comment  | New version   |
| 2016-12        | SA#74   | SP-160855 | 0026 | 1   | C   | Update reference to model repertoire                             | 14.0.0        |
| 2017-03        | SA#75   | SP-170140 | 0027 | 1   | B   | Addition of methodology for entities that can play several roles | 14.1.0        |
| 2017-04        |         |           |      |     |     | Small editorial fixes (MCC)                                      | 14.1.1        |
| 2018-01        | SA#78   | SP-170964 | 0028 | 1   | F   | Update erroneous references                                      | 14.2.0        |
| 2018-01        | SA#78   | SP-180422 | 0032 | -   | A   | Align terminology  | 14.3.0        |
| 2018-06        | -       | -         | -    | -   | -   | Update to Rel-15 version (MCC)                                   | <b>15.0.0</b> |
| 2020-07        | -       | -         | -    | -   | -   | Update to Rel-16 version (MCC)                                   | <b>16.0.0</b> |
| 2022-03        | -       | -         | -    | -   | -   | Update to Rel-17 version (MCC)                                   | <b>17.0.0</b> |

---

# History

| <b>Document history</b> |            |             |
|-------------------------|------------|-------------|
| V17.0.0                 | April 2022 | Publication |
|                         |            |             |
|                         |            |             |
|                         |            |             |
|                         |            |             |