# ETSI TS 132 672 V9.0.0 (2010-02)

Technical Specification

Digital cellular telecommunications system (Phase 2+); Universal Mobile Telecommunications System (UMTS);

LTE:


Telecommunication management;

**Configuration Management (CM);** 

State Management Integration Reference Point (IRP);

**Information Service (IS)** 

(3GPP TS 32.672 version 9.0.0 Release 9)

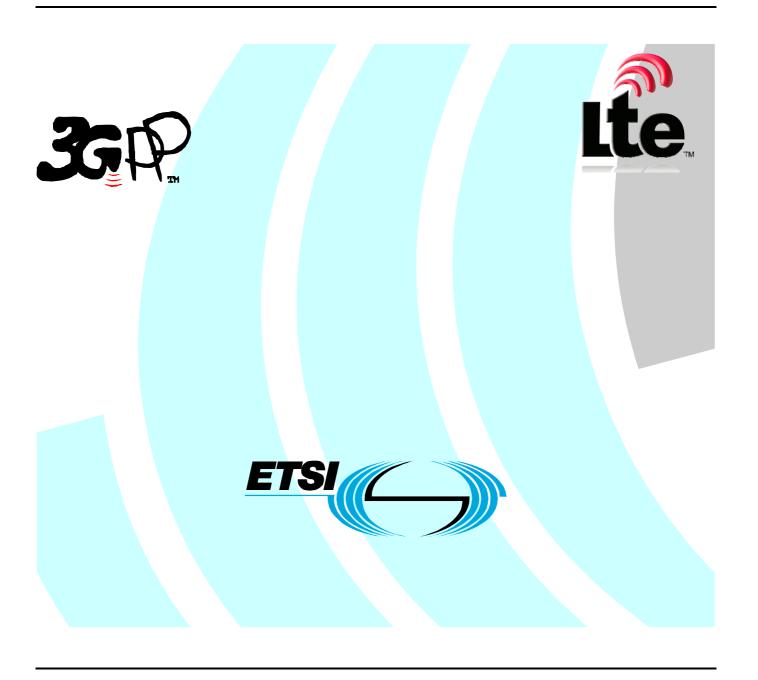

### Reference RTS/TSGS-0532672v900 Keywords GSM, LTE, UMTS

#### **ETSI**

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° 7803/88

#### Important notice

Individual copies of the present document can be downloaded from: http://www.etsi.org

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at http://portal.etsi.org/tb/status/status.asp

If you find errors in the present document, please send your comment to one of the following services: http://portal.etsi.org/chaircor/ETSI\_support.asp

#### Copyright Notification

No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

> © European Telecommunications Standards Institute 2010. All rights reserved.

**DECT**<sup>TM</sup>, **PLUGTESTS**<sup>TM</sup>, **UMTS**<sup>TM</sup>, **TIPHON**<sup>TM</sup>, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

**3GPP**<sup>™</sup> is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. LTE™ is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

# Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://webapp.etsi.org/IPR/home.asp).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

#### **Foreword**

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <a href="http://webapp.etsi.org/key/queryform.asp">http://webapp.etsi.org/key/queryform.asp</a>.

# Contents

| Intellectual Property Rights                       | 2        |  |  |  |  |  |
|--|----------|--|--|--|--|--|
| Foreword   |          |  |  |  |  |  |
| Foreword   |          |  |  |  |  |  |
|  |          |  |  |  |  |  |
| Introduction                                       | 4        |  |  |  |  |  |
| 1 Scope  | 5        |  |  |  |  |  |
| 2 References                                       | 5        |  |  |  |  |  |
| 3 Definitions and abbreviations                    | 5        |  |  |  |  |  |
| 3.1 Definitions and desire vitations               |          |  |  |  |  |  |
| 3.2 Abbreviations                                  |          |  |  |  |  |  |
| 4 Void   | <i>6</i> |  |  |  |  |  |
| 5 Information Object Classes (IOCs)                | 6        |  |  |  |  |  |
| 5.1 Information entities imported and local labels |          |  |  |  |  |  |
| 5.2 Class diagram                                  |          |  |  |  |  |  |
| 5.2.1 Attributes and relationships                 |          |  |  |  |  |  |
| 5.2.2 Inheritance                                  |          |  |  |  |  |  |
| 5.3 Information object classes definition          | 7        |  |  |  |  |  |
| 5.3.1 StateManagementEntity                        |          |  |  |  |  |  |
| 5.3.1.1 Definition                                 | 7        |  |  |  |  |  |
| 5.3.1.2 Attributes                                 | 7        |  |  |  |  |  |
| 4 Information attributes definition                |          |  |  |  |  |  |
| 5.4.1 Definition and legal values                  | 8        |  |  |  |  |  |
| Annex A (informative): Change history              | 9        |  |  |  |  |  |
| History  |          |  |  |  |  |  |

#### **Foreword**

This Technical Specification (TS) has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

#### where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

#### Introduction

The present document is part of a TS-family covering the 3<sup>rd</sup> Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication management; as identified below:

- 32.671: Configuration Management (CM); State Management Integration Reference Point (IRP); Requirements
- 32.672: Configuration Management (CM); State Management Integration Reference Point (IRP); Information Service (IS)
- 32.673: Configuration Management (CM); State Management Integration Reference Point (IRP); Common Object Request Broker Architecture (CORBA) Solution Set (SS)
- 32.675: Configuration Management (CM); State Management Integration Reference Point (IRP); Bulk CM eXtensible Markup Language (XML) file format definition

Configuration Management (CM), in general, provides the operator with the ability to assure correct and effective operation of the 3G network as it evolves. CM actions have the objective to control and monitor the actual configuration on the Network Elements (NEs) and Network Resources (NRs), and they may be initiated by the operator or by functions in the Operations Systems (OSs) or NEs.

CM actions may be requested as part of a deployment program (e.g. additions and deletions), as part of an optimisation program (e.g. modifications), and to maintain the overall Quality of Service (QoS). The CM actions are initiated either as single actions on single NEs of the 3G network, or as part of a complex procedure involving actions on many resources/objects in one or several NEs.

# 1 Scope

The present document defines the Information Service (IS) part of the State Management IRP. It specifies the semantics of the network resource state and status information visible across the Itf-N. It also specifies the interaction required for the management of the state and status information.

The state and status attributes specified in this document shall be used, where applicable, as attributes in Information Object Class (IOC) definitions of other 3GPP IRPs. When used by the IOC definition, the semantics of the state and status attributes can be qualified and enhanced if deemed necessary.

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.
- [1] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".
- [2] 3GPP TS 32.102: "Telecommunication management; Architecture".
- [3] 3GPP TS 32.300: "Telecommunication management; Configuration Management (CM); Name convention for Managed Objects".
- [4] 3GPP TS 32.302: "Telecommunication management; Configuration Management (CM); Notification Integration Reference Point (IRP): Information Service (IS)".
- [5] 3GPP TS 32.312: "Telecommunication management; Generic Integration Reference Point (IRP) management; Information Service (IS)".
- [6] 3GPP TS 32.600: "Telecommunication management; Configuration Management (CM); Concept and high-level requirements".
- [7] ITU-T Recommendation X.731: "Information technology Open Systems Interconnection Systems Management: State management function".
- [8] ITU-T Recommendation X.733: "Information technology Open Systems Interconnection Systems Management: Alarm reporting function".

## 3 Definitions and abbreviations

#### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TS 32.101 [1], 3GPP TS 32.102 [2] and 3GPP TS 32.600 [6] apply.

#### 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CM Configuration Management
EM Element Manager
IOC Information Object Class
IRP Integration Reference Point

IS Information Service (see 3GPP TS 32.101 [1])

M Mandatory
NE Network Element
NM Network Manager
NR Network Resource

O Optional

OMG Object Management Group

OS Operations System
QoS Quality of Service

UML Unified Modelling Language (OMG)

## 4 Void

# 5 Information Object Classes (IOCs)

## 5.1 Information entities imported and local labels


| Label reference | Local label |  |
|-----------------|-------------|--|
|                 |             |  |

There are no information entities imported.

## 5.2 Class diagram

### 5.2.1 Attributes and relationships

This subclause depicts the set of information object classes (IOCs) that encapsulate information within the Generic State Management IRP. The intent is to identify the information required for the State Management IRP implementation of its operations and notification emission. This subclause provides the overview of all information object classes in UML. Subsequent subclauses provide more detailed specification of various aspects of these information object classes.

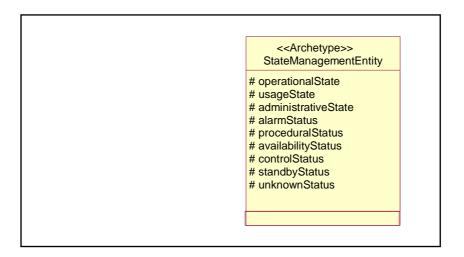

#### 5.2.2 Inheritance

There are no inheritance relationships.

# 5.3 Information object classes definition

## 5.3.1 StateManagementEntity

#### 5.3.1.1 Definition

StateManagementEntity is a Archetype, that may represent any IOC defined in the Network Resource Models, e.g. Generic Network Resource Model, Core Network Resource Model, UTRAN Network Resource Model or GERAN Network Resource Model.

The attributes defined for this Archetype can be imported and used in any IOC of the Network Resource Models, where such attributes are needed. These attributes shall be used in the same way as defined in the ITU-T Recommendation X.731 [7] and ITU-T Recommendation X.733 [8], unless otherwise stated. That document gives also examples of state diagrams, defining possible state transitions when one or more of the state attributes defined here are used in a class.

#### 5.3.1.2 Attributes

The following attributes are defined for this information object class.

| Attribute name      | Support Qualifier |
|---------------------|-------------------|
| operationalState    | N/A               |
| usageState          | N/A               |
| administrativeState | N/A               |
| alarmStatus         | N/A               |
| proceduralStatus    | N/A               |
| availabilityStatus  | N/A               |
| controlStatus       | N/A               |
| standbyStatus       | N/A               |
| unknownStatus       | N/A               |

# 5.4 Information attributes definition

# 5.4.1 Definition and legal values

The following table gives the definition and legal values for each attribute.

| Attribute Name      | Definition                                   | Legal Values  |
|---------------------|--|---|
| operationalState    | It indicates the operational state of the    | "Enabled", "Disabled"   |
|                     | object instance. "It describes whether or    | The meaning of these values is as defined in ITU-T            |
|                     | not the resource is physically installed     | Recommendation X.731 [7].                                     |
|                     | and working." [7] This attribute is READ-    |   |
|                     | ONLY.  |   |
| usageState          | It indicates the usage state of the object   | "Idle", "Active", "Busy"                                      |
|                     | instance. "It describes whether or not the   | The meaning of these values is as defined in ITU-T            |
|                     | resource is actively in use at a specific    | Recommendation X.731 [7].                                     |
|                     | instant, and if so, whether or not it has    |   |
|                     | spare capacity for additional users at that  |   |
|                     | instant." [7] This attribute is READ-ONLY.   |   |
| administrativeState | It indicates the administrative state of the | "Locked", "Shutting down", "Unlocked"                         |
|                     | object instance. "It describes the           | The meaning of these values is as defined in ITU-T            |
|                     | permission to use or prohibition against     | Recommendation X.731 [7].                                     |
|                     | using the resource, imposed through the      |   |
|                     | management services." [7]                    |   |
| alarmStatus         | It indicates the alarm status of the object  | "Cleared", "Indeterminate", "Warning", "Minor", "Major",      |
|                     | instance. This is mapped to the perceived    | "Critical", The meaning of these values is as defined for     |
|                     | severity of the most severe active alarm     | the attribute perceived severity in ITU-T Recommendation      |
|                     | associated to the object instance.           | X.733 [8].  |
| proceduralStatus    | It indicates the procedural status of the    | A set consisting of zero or more of the following values:     |
|                     | object instance.                             | "Initialisation required", "Not initialised", "Initialising", |
|                     |  | "Reporting", "Terminating". The meaning of these values       |
|                     |  | is as defined in ITU-T Recommendation X.731 [7].              |
| availabilityStatus  | It indicates the availability status of the  | A set consisting of zero or more of the following values:     |
|                     | object instance.                             | "In test", "Failed", "Power off", "Off line", "Off duty",     |
|                     |  | "Dependency", "Degraded", "Not installed", "Log full"         |
|                     |  | The meaning of these values is as defined in ITU-T            |
|                     |  | Recommendation X.731 [7].                                     |
| controlStatus       | ·  | A set consisting of zero or more of the following values:     |
|                     | instance.                                    | "Subject to test", "Part of services locked", "Reserved for   |
|                     |  | test", "Suspended".   |
|                     |  | The meaning of these values is as defined in ITU-T            |
|                     |  | Recommendation X.731 [7].                                     |
| standbyStatus       | It indicates the standby status of the       | "Hot standby", "Cold standby", "Providing service", .         |
|                     | object instance.                             | The meaning of these values is as defined in ITU-T            |
|                     |  | Recommendation X.731 [7].                                     |
| UnknownStatus       | It indicates whether the state of the        | "True" (state is unknown, the values of the state attributes  |
|                     | resource represented by the managed          | may not reflect the actual state of the resource);            |
|                     | object is unknown.                           | "False" (state is known, the values of the state attributes   |
|                     |  | reflect the actual state of the resource).                    |

# Annex A (informative): Change history

| Change history |       |           |      |     |  |       |       |
|----------------|-------|-----------|------|-----|--|-------|-------|
| Date           | TSG # | TSG Doc.  | CR   | Rev | Subject/Comment  | Old   | New   |
| Jun 2002       | SA_16 | SP-020329 |      |     | Submitted to TSG SA #16 for Information  | 1.0.0 |       |
| Sep 2002       | SA_17 | SP-020469 |      |     | Submitted to TSG SA #17 for Approval   | 2.0.0 | 5.0.0 |
| Mar 2004       | SA_23 | SP-040105 |      |     | Automatic upgrade to Rel-6 (no CR)   | 5.0.0 | 6.0.0 |
| Mar 2005       | SA_27 | SP-050051 | 0001 |     | Remove the irrelevant clause 4   | 6.0.0 | 6.1.0 |
| Jun 2007       | SA_36 |           |      |     | Automatic upgrade to Rel-7 (no CR) at freeze of Rel-7. Deleted reference to CMIP SS, discontinued from R7 onwards. | 6.1.0 | 7.0.0 |
| Dec 2008       | SA_42 |           |      |     | Upgrade to Release 8   | 7.0.0 | 8.0.0 |
| Dec 2009       | -     | -         | -    | -   | Update to Rel-9 version  | 8.0.0 | 9.0.0 |

# History

| Document history |               |             |  |  |
|------------------|---------------|-------------|--|--|
| V9.0.0           | February 2010 | Publication |  |  |
|                  |               |             |  |  |
|                  |               |             |  |  |
|                  |               |             |  |  |
|                  |               |             |  |  |