


# ETSI TS 132 743 V6.1.0 (2005-12)

*Technical Specification*

**Universal Mobile Telecommunications System (UMTS);  
Telecommunication management;  
Configuration Management (CM);  
Signalling Transport Network (STN) interface  
Network Resource Model (NRM)  
Integration Reference Point (IRP):  
Common Object Request Broker Architecture (CORBA)  
Solution Set (SS)  
(3GPP TS 32.743 version 6.1.0 Release 6)**

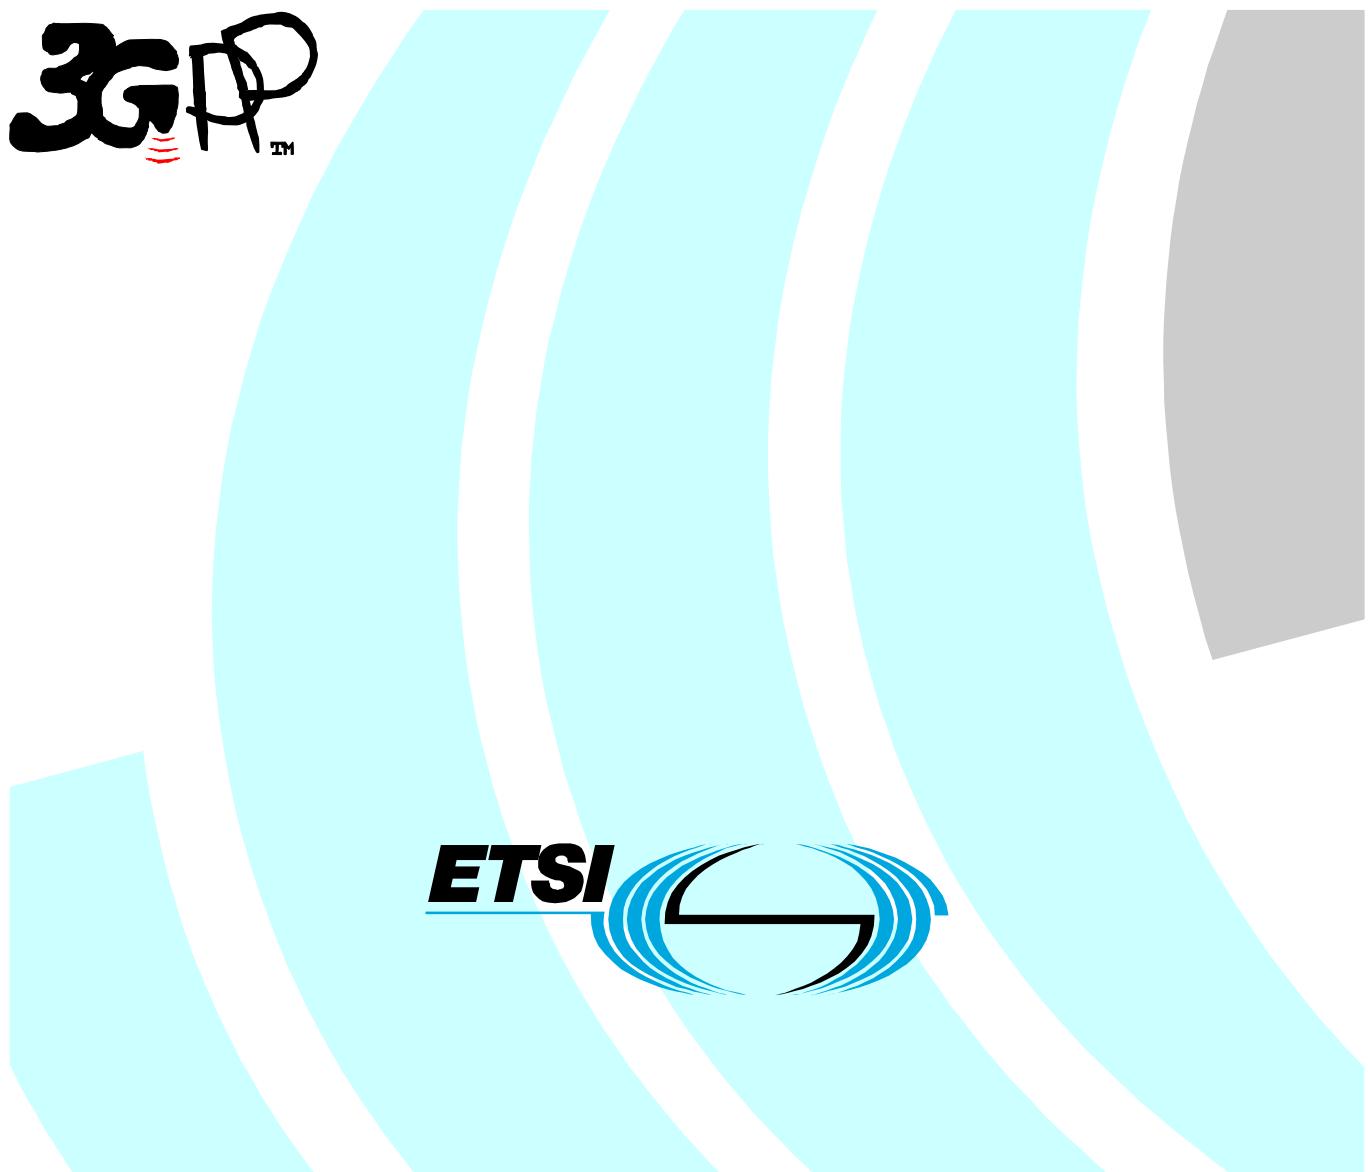

---

Reference

RTS/TSGS-0532743v610

---

Keywords

UMTS

***ETSI***

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

***Important notice***

Individual copies of the present document can be downloaded from:  
<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.  
Information on the current status of this and other ETSI documents is available at  
<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:  
[http://portal.etsi.org/chaircor/ETSI\\_support.asp](http://portal.etsi.org/chaircor/ETSI_support.asp)

---

***Copyright Notification***

No part may be reproduced except as authorized by written permission.  
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2005.  
All rights reserved.

**DECT™, PLUGTESTS™ and UMTS™** are Trade Marks of ETSI registered for the benefit of its Members.  
**TIPHON™** and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.  
**3GPP™** is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

---

## Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

---

## Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under  
<http://webapp.etsi.org/key/queryform.asp> .

---

## Contents

Intellectual Property Rights .....	2
Foreword.....	2
Foreword.....	4
Introduction .....	4
1    Scope .....	5
2    References .....	5
3    Definitions and abbreviations.....	5
3.1    Definitions.....	5
3.2    Abbreviations .....	5
4    Architectural features .....	6
4.1    Notifications .....	6
4.2    Syntax for Distinguished Names and Versions .....	6
5    Mapping .....	6
5.1    General mappings.....	6
5.2    STN NRM Information Object Class (IOC) mapping.....	6
5.2.1    IOC MtpSignPoint .....	7
5.2.2    IOC SignLinkSetTp .....	7
5.2.3    IOC SignLinkTp .....	7
5.2.5    IOC SignRouteSetNePart .....	8
5.2.6    IOC SignRouteNePart.....	8
6    Rules for NRM extensions .....	8
6.1    Allowed extensions .....	8
6.2    Extensions not allowed.....	9
<b>Annex A (normative):        IDL specifications .....</b>	<b>10</b>
A.1    IDL specification (file name "STNNetworkResourcesIRPSystem.idl") .....	10
A.2    IDL specification (file name "STNNetworkResourcesIRPDefs.idl") .....	11
<b>Annex B (informative):        Change history .....</b>	<b>13</b>
History .....	14

---

## Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

## Introduction

The present document is part of a TS-family covering the 3<sup>rd</sup> Generation Partnership Project: Technical Specification Group Services and System Aspects; Telecommunication management; Configuration Management (CM); as identified below:

- TS 32.741: "Signalling Transport Network (STN) interface Network Resource Model (NRM) Integration Reference Point (IRP); Requirements".
- TS 32.742: "Signalling Transport Network (STN) interface Network Resource Model (NRM) Integration Reference Point (IRP); Information Service (IS)".
- TS 32.743:** "**Signalling Transport Network (STN) interface Network Resource Model (NRM) Integration Reference Point (IRP); Common Object Request Broker Architecture (CORBA) Solution Set (SS)**".
- TS 32.744: "Signalling Transport Network (STN) interface Network Resource Model (NRM) Integration Reference Point (IRP); Common Management Information Protocol (CMIP) Solution Set (SS)".
- TS 32.745: "Signalling Transport Network (STN) interface Network Resource Model (NRM) Integration Reference Point (IRP); eXtensible Markup Language (XML) file format definition".

Configuration Management (CM), in general, provides the operator with the ability to assure correct and effective operation of the 3G network as it evolves. CM actions have the objective to control and monitor the actual configuration on the Network Elements (NEs) and Network Resources (NRs), and they may be initiated by the operator or by functions in the Operations Systems (OSs) or NEs.

CM actions may be requested as part of an implementation programme (e.g. additions and deletions), as part of an optimisation programme (e.g. modifications), and to maintain the overall Quality of Service (QoS). The CM actions are initiated either as single actions on single NEs of the 3G network, or as part of a complex procedure involving actions on many resources/objects in one or several NEs.

---

## 1 Scope

The purpose of this STN Network Resources IRP: CORBA Solution Set is to define the mapping of the IRP information model (see 3GPP TS 32.742 [4]) to the protocol specific details necessary for implementation of this IRP in a CORBA/IDL environment.

This Solution Set specification is related to 3GPP TS 32.742 V6.0.X.

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".
- [2] 3GPP TS 32.102: "Telecommunication management; Architecture".
- [3] 3GPP TS 32.600: "Telecommunication management; Configuration Management (CM); Concept and high-level requirements".
- [4] 3GPP TS 32.742: "Telecommunication management; Configuration Management (CM); Signalling Transport Network (STN) interface Network Resource Model (NRM) Integration Reference Point (IRP); Information Service (IS)".
- [5] 3GPP TS 32.300: "Telecommunication management; Configuration Management (CM); Name convention for Managed Objects".
- [6] 3GPP TS 32.303: "Telecommunication management; Configuration Management (CM); Notification Integration Reference Point (IRP); Common Object Request Broker Architecture (CORBA) Solution Set (SS)".

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For terms and definitions please refer to 3GPP TS 32.101 [1], 3GPP TS 32.102 [2], 3GPP TS 32.600 [3] and 3GPP TS 32.742 [4].

### 3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CORBA	Common Object Request Broker Architecture
DN	Distinguished Name
IS	Information Service
IDL	Interface Definition Language
IRP	Integration Reference Point

MO	Managed Object
MOC	Managed Object Class
NRM	Network Resource Model
OMG	Object Management Group
SS	Solution Set
STN	Signalling Transport Network

## 4 Architectural features

The overall architectural feature of STN Network Resources IRP is specified in 3GPP TS 32.742 [4]. This clause specifies features that are specific to the CORBA SS.

### 4.1 Notifications

Notifications are sent according to the Notification IRP: CORBA SS (see 3GPP TS 32.303 [6]).

### 4.2 Syntax for Distinguished Names and Versions

The format of a Distinguished Name is defined in 3GPP TS 32.300 [5].

## 5 Mapping

### 5.1 General mappings

Attributes modelling associations as defined in the NRM (here also called "reference attributes") are in this SS mapped to attributes. The names of the reference attributes in the NRM are mapped to the corresponding attribute names in the MOC. When the cardinality for an association is 0..1 or 1..1 the datatype for the reference attribute is defined as an MOReference. The value of an MO reference contains the distinguished name of the associated MO. When the cardinality for an association allows more than one referred MO, the reference attribute will be of type MOReferenceSet, which contains a sequence of MO references.

### 5.2 STN NRM Information Object Class (IOC) mapping

This Solution Set supports reference attributes for relations other than containment relations between objects. Reference attributes are therefore introduced in each MOC where needed.

## 5.2.1 IOC MtpSignPoint

**Mapping from NRM IOC MtpSignPoint attributes to SS equivalent MOC MtpSignPoint attributes**

NRM Attributes of IOC MtpSignPoint in 3GPP TS 32.742 [4]	SS Attributes	SS Type	Qualifier
mtpSignPointId	mtpSignPointId	string	Read-Only, M
pointCode	pointCode	unsigned long	Read-Only, M
networkIndicator	networkIndicator	STNNetworkResourcesIRPSSystem::AttributeTypes::NetworkIndicatorType	Read-Only, M
pointCodeLength	pointCodeLength	STNNetworkResourcesIRPSSystem::AttributeTypes::PointCodeLengthType	Read-Only, M
spType	spType	STNNetworkResourcesIRPSSystem::AttributeTypes::SPTYPEType	Read-Only, M
userLabel	userLabel	string	Read-Write, M
relatedObjects	relatedObjects	GenericNetworkResourcesIRPSYSTEM::AttributeTypes::MOResourceSet	Read-Only, M

## 5.2.2 IOC SignLinkSetTp

**Mapping from NRM IOC SignLinkSetTp attributes to SS equivalent MOC SignLinkSetTp attributes**

NRM Attributes of IOC SignLinkSetTp in 3GPP TS 32.742 [4]	SS Attributes	SS Type	Qualifier
signLinkSetTpId	signLinkSetTpId	string	Read-Only, M
adjPc	adjPc	unsigned long	Read-Only, M
userLabel	userLabel	string	Read-Write, M
maxCapacityLS	maxCapacityLS	float	Read-Only, M

## 5.2.3 IOC SignLinkTp

**Mapping from NRM IOC SignLinkTp attributes to SS equivalent MOC SignLinkTp attributes**

NRM Attributes of IOC SignLinkTp in 3GPP TS 32.742 [4]	SS Attributes	SS Type	Qualifier
signLinkTpId	signLinkTpId	string	Read-Only, M
slCode	slCode	unsigned long	Read-Only, M
slsCodeNormalList	slsCodeNormalList	STNNetworkResourcesIRPSSystem::AttributeTypes::SLSListType	Read-Only, M
slsCodeCurrentList	slsCodeCurrentList	STNNetworkResourcesIRPSSystem::AttributeTypes::SLSListType	Read-Only, M
linkTpStatus	linkTpStatus	STNNetworkResourcesIRPSSystem::AttributeTypes::LinkStatusType	Read-Only, M
maxCapacitySL	maxCapacitySL	float	Read-Only, M
userLabel	userLabel	string	Read-Write, M
signLinkType	signLinkType	STNNetworkResourcesIRPSSystem::AttributeTypes::SignLinkTypeType	Read-Only, M

## 5.2.5 IOC SignRouteSetNePart

**Mapping from NRM IOC SignRouteSetNePart attributes to SS equivalent MOC SignRouteSetNePart attributes**

NRM Attributes of IOC SignRouteSetNePart in 3GPP TS 32.742 [4]	SS Attributes	SS Type	Qualifier
signRouteSetNePartId	signRouteSetNePartId	string	Read-Only, M
destinationPc	destinationPc	unsigned long	Read-Only, M
userLabel	userLabel	string	Read-Write, M
loadsharingInformationRouteSetNePart	loadsharingInformationRouteSetNePart	string	Read-Only, M

## 5.2.6 IOC SignRouteNePart

**Mapping from NRM IOC SignRouteNePart attributes and association roles to SS equivalent MOC SignRouteNePart attributes**

NRM Attributes/association roles of IOC SignRouteNePart in 3GPP TS 32.622 [4]	SS Attributes	SS Type	Qualifier
signRouteNePartId	signRouteNePartId	string	Read-Only, M
signLinkSetTpPointer	signLinkSetTpPointer	GenericNetworkResourcesIRPSystem::AttributeTypes::MOResource	Read-Only, M
fixedPriority	fixedPriority	unsigned long	Read-Only, M
userLabel	userLabel	string	Read-Write, M

# 6 Rules for NRM extensions

This clause discusses how the models and IDL definitions provided in the present document can be extended for a particular implementation and still remain compliant with 3GPP SA5's specifications.

## 6.1 Allowed extensions

Vendor-specific MOCs may be supported. The vendor-specific MOCs may support new types of attributes. The 3GPP SA5-specified notifications may be issued referring to the vendor-specific MOCs and vendor-specific attributes. New MOCs shall be distinguishable from 3GPP SA5 MOCs by name. 3GPP SA5-specified and vendor-specific attributes may be used in vendor-specific MOCs. Vendor-specific attribute names shall be distinguishable from existing attribute names.

NRM MOCs may be subclassed. Subclassed MOCs shall maintain the specified behaviour of the 3GPP SA5's superior classes. They may add vendor-specific behaviour with vendor-specific attributes. When subclassing, the naming attributes cannot be changed. The subclassed MOC shall support all attributes of its superior class. Vendor-specific attributes cannot be added to 3GPP SA5 NRM MOCs without subclassing.

When subclassing, the 3GPP SA5-specified containment rules and their specified cardinality shall still be followed. As an example, ManagementNode (or its subclasses) shall be contained under SubNetwork (or its subclasses).

Managed Object Instances may be instantiated as CORBA objects. This requires that the MOCs be represented in IDL. 3GPP SA5's NRM MOCs are not currently specified in IDL, but may be specified in IDL for instantiation or subclassing purposes. However, management information models should not require that IRPManagers access the instantiated managed objects other than through supported methods in the present document.

Extension rules related to notifications (Notification categories, Event Types, Extended Event Types etc.) are FFS.

## 6.2 Extensions not allowed

The IDL specifications in the present document cannot be edited or altered. Any additional IDL specifications shall be specified in separate IDL files.

IDL interfaces (note: not MOCs) specified in the present document may not be subclassed or extended. New interfaces may be defined with vendor-specific methods.

---

## Annex A (normative): IDL specifications

### A.1 IDL specification (file name "STNNetworkResourcesIRPSys tem.idl")

```
// File: STNNetworkResourcesIRPSys tem.idl
#ifndef _STN_NETWORK_RESOURCES_IRP_SYSTEM_IDL_
#define _STN_NETWORK_RESOURCES_IRP_SYSTEM_IDL_

#pragma prefix "3gppsa5.org"

module STNNetworkResourcesIRPSys tem
{
    /**
     * This module adds datatype definitions for types
     * used in the NRM which are not basic datatypes defined
     * already in CORBA.
    */
    module AttributeTypes
    {
        enum NetworkIndicatorType
        {
            International,
            Spare,
            National,
            NationalSpare
        };

        enum PointCodeLengthType
        {
            BITS_24,
            BITS_14
        };

        enum SPTypeType
        {
            SEP,
            STP,
            STEP
        };

        typedef unsigned long SLSType; // 0..15
        typedef sequence<SLSType,16> SLSListType;

        enum LinkStati
        {
            Available,
            Deactivated,
            Failed,
            LocalBlocked,
            RemoteBlocked,
            LocalInhibited,
            RemoteInhibited
        };

        typedef sequence <LinkStati> LinkStatusType;

        enum SignLinkTypeType
        {
            ST_64K,
            ST_2M
        };
    };
};

#endif // _STN_NETWORK_RESOURCES_IRP_SYSTEM_IDL_
```

---

## A.2 IDL specification (file name "STNNetworkResourcesIRPDefs.idl")

```

// File: STNNetworkResourcesIRPDefs.idl
#ifndef _STN_NETWORK_RESOURCES_IRP_DEFS_IDL_
#define _STN_NETWORK_RESOURCES_IRP_DEFS_IDL_

#include "GenericNetworkResourcesNRMDefs.idl"

#pragma prefix "3gppsa5.org"

/**
 * This module defines constants for each MO class name and
 * the attribute names for each defined MO class.
 */
module STNNetworkResourcesIRPDefs
{

    /**
     * Definitions for MO class MtpSignPoint
     */
    interface MtpSignPoint: GenericNetworkResourcesNRMDefs::Top
    {
        const string CLASS = "MtpSignPoint";

        // Attribute Names
        //
        const string mtpSignPointId = "mtpSignPointId";
        const string pointCode = "pointCode";
        const string networkIndicator = "networkIndicator";
        const string pointCodeLength = "pointCodeLength";
        const string spType = "spType";
        const string userLabel = "userLabel";
        const string relatedObjects = "relatedObjects";
    };

    /**
     * Definitions for MO class SignLinkSetTp
     */
    interface SignLinkSetTp: GenericNetworkResourcesNRMDefs::Top
    {
        const string CLASS = "SignLinkSetTp";

        // Attribute Names
        //
        const string signLinkSetTpId = "signLinkSetTpId";
        const string adjPc = "adjPc";
        const string userLabel = "userLabel";
        const string maxCapacityLS = "maxCapacityLS";
    };

    /**
     * Definitions for MO class SignLinkTp
     */
    interface SignLinkTp: GenericNetworkResourcesNRMDefs::Top
    {
        const string CLASS = "SignLinkTp";

        // Attribute Names
        //
        const string signLinkTpId = "signLinkTpId";
        const string slCode = "slCode";
        const string slsCodeNormalList = "slsCodeNormalList";
        const string slsCodeCurrentList = "slsCodeCurrentList";
        const string linkTpStatus = "linkTpStatus";
        const string maxCapacitySL = "maxCapacitySL";
        const string userLabel = "userLabel";
        const string signLinkType = "signLinkType";
    };

    /**
     * Definitions for MO class SignRouteSetNePart

```

```
/*
interface SignRouteSetNePart: GenericNetworkResourcesNRMDefs::Top
{
    const string CLASS = "SignRouteSetNePart";

    // Attribute Names
    //
    const string signRouteSetNePartId = "signRouteSetNePartId";
    const string destinationPc = "destinationPc";
    const string userLabel = "userLabel";
    const string loadsharingInformationRouteSetNePart = "loadsharingInformationRouteSetNePart";
}

/**
 * Definitions for abstract MO class SignRouteNePart
 */
interface SignRouteNePart: GenericNetworkResourcesNRMDefs::Top
{
    const string CLASS = "SignRouteNePart";

    // Attribute Names
    //
    const string signRouteNePartId = "signRouteNePartId";
    const string signLinkSetTpPointer = "signLinkSetTpPointer";
    const string fixedPriority = "fixedPriority";
    const string userLabel = "userLabel";
};

#endif // _STN_NETWORK_RESOURCES_IRP_DEFS_IDL_
```

---

## Annex B (informative): Change history

Change history							Cat	Old	New
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment				
Sep 2004	SA_25	SP-040602	--	--	Submitted to TSG SA#25 for Approval		--	1.0.0	6.0.0
Dec 2005	SA_30	SP-050720	0001	--	Correct definition of LinkStatusType in IDL - Align with 32.742 (ITU-T Q.751.1)	F	6.0.0	6.1.0	

---

## History

<b>Document history</b>		
V6.0.0	September 2004	Publication
V6.1.0	December 2005	Publication