

ETSI TS 148 071 V6.7.0 (2004-11)

Technical Specification

**Digital cellular telecommunications system (Phase 2+);
Location Services (LCS);
Serving Mobile Location Centre -
Base Station System (SMLC-BSS) interface;
Layer 3 specification
(3GPP TS 48.071 version 6.7.0 Release 6)**



Reference

RTS/TSGG-0248071v670

Keywords

GSM

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2004.
All rights reserved.

DECTTM, **PLUGTESTS**TM and **UMTS**TM are Trade Marks of ETSI registered for the benefit of its Members.
TIPHONTM and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Contents

| | |
|--|-----------|
| Intellectual Property Rights | 2 |
| Foreword..... | 2 |
| Foreword..... | 4 |
| 1 Scope | 5 |
| 2 References | 5 |
| 3 Definitions and abbreviations..... | 5 |
| 4 Messages functional definitions and contents | 6 |
| 4.1 General | 6 |
| 4.2 Messages | 6 |
| 4.2.1 TA Request | 7 |
| 4.2.2 TA Response..... | 7 |
| 4.2.3 (void) | 7 |
| 4.2.4 (void) | 7 |
| 4.2.5 Reject..... | 7 |
| 4.2.6 Reset | 8 |
| 4.2.7 Abort..... | 8 |
| 4.2.8 TA Layer3..... | 9 |
| 4.2.9 MS Position Command | 9 |
| 4.2.10 MS Position Response | 9 |
| 4.2.11 U-TDOA Request | 9 |
| 4.2.12 U-TDOA Response..... | 10 |
| 5 Information element encodings | 10 |
| 5.1 Message Type IE..... | 12 |
| 5.2 Timing Advance IE | 12 |
| 5.3 (void)..... | 12 |
| 5.4 Cell Identity IE | 12 |
| 5.5 (void)..... | 13 |
| 5.6 (void)..... | 13 |
| 5.7 (void)..... | 13 |
| 5.8 Channel Description IE | 13 |
| 5.9 (void)..... | 13 |
| 5.10 (void)..... | 13 |
| 5.11 (void)..... | 13 |
| 5.12 Measurement Report IE..... | 13 |
| 5.13 (void)..... | 13 |
| 5.14 Cause IE | 13 |
| 5.15 RRLP Flag IE | 14 |
| 5.16 RRLP IE | 14 |
| 5.17 Cell Identity List IE..... | 15 |
| 5.18 Enhanced Measurement Report IE..... | 16 |
| 5.19 Location Area Code IE..... | 16 |
| 5.20 Frequency List IE | 16 |
| 5.21 MS Power IE | 16 |
| 5.22 Delta Timer IE..... | 17 |
| 5.23 Serving Cell Identifier IE | 17 |
| 5.24 Encryption Key IE..... | 17 |
| 5.25 Cipher Mode Setting IE..... | 17 |
| 5.26 Channel Mode IE..... | 18 |
| 5.27 MultiRate Configuration IE..... | 18 |
| 5.28 Polling Repetition IE..... | 18 |
| 5.29 Packet Channel Description IE..... | 18 |
| 5.30 TLLI IE | 18 |
| 5.31 TFI IE | 19 |
| 5.32 Starting Time IE..... | 19 |
| Annex A (informative): Change history | 20 |
| History | 21 |

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document contains the coding of information necessary for support of location service operation on the SMLC-BSS interface layer 3.

Clause 2 gives the functional definitions and contents of messages for location service operations. Clause 3 gives the general format and coding for messages used for location service and the format and coding of information elements used for location service operations.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 43.059: "Functional stage 2 description of Location Services (LCS) in GERAN".
- [3] 3GPP TS 24.007: "Mobile radio interface signalling layer 3; General aspects".
- [4] 3GPP TS 44.018: "Mobile radio interface layer 3 specification; Radio Resource Control Protocol".
- [4a] 3GPP TS 24.008: "Mobile radio interface layer 3 specification; Core network protocols; Stage 3".
- [5] 3GPP TS 45.008: "Radio subsystem link control".
- [6] 3GPP TS 48.008: "Mobile Switching Centre – Base Station System (MSC-BSS) interface; Layer 3 specification".
- [7] 3GPP TS 49.031: "Location Services (LCS); Base Station System Application Part LCS Extension (BSSAP-LE)".
- [8] 3GPP TS 44.031: "Location Services (LCS); Mobile Station (MS) - Serving Mobile Location Centre (SMLC) Radio Resource LCS Protocol (RRLP)".

3 Definitions and abbreviations

For the purposes of the present document, the abbreviations, terms and definitions given in 3GPP TR 21.905 and 3GPP TS 43.059 apply.

4 Messages functional definitions and contents

4.1 General

This sub-clause defines the structure of the messages of the SMLC-BSS layer 3 protocol defined in 3GPP TS 43.059.

Each definition includes:

- a) a brief description of the message;
- b) a table listing the information elements in the order of their appearance in the message.

For each IE the table indicates:

- 1) the name of the IE (which gives an idea of the semantics of the element), which is used in this and other specifications as a reference to the IE within the message;
 - 2) the name of the type of the IE (which indicates the coding of the value part of the IE), and a reference to a description of the value part of the IE;
 - 3) the presence requirement indication (M, C or O) for the IE, as defined in 3GPP TS 24.007;
 - 4) the format of the IE (T, V, TV, LV, TLV) as defined in 3GPP TS 24.007;
 - 5) the length of the IE (or permissible range of lengths), in octets, in the message. The value of the length gives the number of octets in the IE following the length and element identifier. Where the length is encoded using more than one octet, the high order bit is bit 8 of the first (lowest numbered octet) and the low order bit is bit 1 of the last (highest numbered octet). When a length has a range of M to N octets, the notation 'M-N' is used. The symbol 'n' represents the maximum of a range when indefinite.
- c) sub-clauses specifying conditions for IEs with presence requirement C or O in the relevant message. Together with other conditions specified in 3GPP TS 43.059 this defines when the IE shall be included or not, what non-presence of such IEs means, and (for IEs with presence requirement C) the static conditions for presence and/or non-presence of the IEs (see 3GPP TS 43.059).

4.2 Messages

The following Location Services related messages are exchanged between the SMLC and the BSS:

- TA Request;
- TA Response;
- Reject;
- Reset;
- Abort;
- TA Layer3;
- MS Position Command;
- MS Position Response;
- U-TDOA Request;
- U-TDOA Response.

On the Lb interface the messages are contained in the BSSLAP APDU IE which is encapsulated in the following messages as specified in 3GPP TS 49.031:

- BSSMAP-LE CONNECTION ORIENTED INFORMATION message (for all messages except the TA LAYER 3 message);
- BSSMAP-LE PERFORM LOCATION REQUEST message (for the TA LAYER 3 message)
- BSSMAP-LE PERFORM LOCATION INFORMATION message (for the TA LAYER 3 message).

4.2.1 TA Request

The TA Request is a message from the SMLC to the BSS, requesting BSS to return the timing advance (or access delay) of the MS.

Table 4.2.1.1: TA Request message content

| Information element | Type/Reference | Presence | Format | Length |
|---------------------|-----------------------|----------|--------|--------|
| Message Type | Message Type IE / 5.1 | M | V | 1 |

4.2.2 TA Response

The TA Response is a message from the BSS to the SMLC. It is a response to TA Request message and contains the following information elements.

Table 4.2.2.1: TA Response message content

| Information element | Type/Reference | Presence | Format | Length |
|-----------------------------|---------------------------------------|----------|--------|--------|
| Message Type | Message Type IE / 5.1 | M | V | 1 |
| Serving Cell Identity | Cell Identity IE / 5.4 | M | TV | 3 |
| Timing Advance | Timing Advance IE / 5.2 | M | TV | 2 |
| Measurement Report | Measurement Report IE / 5.12 | O | TLV | 18 |
| Enhanced Measurement Report | Enhanced Measurement Report IE / 5.18 | O | TLV | 4-n |
| Measured Cell Identity List | Cell Identity List IE / 5.17 | O | TLV | 6-n |

4.2.3 (void)

4.2.4 (void)

4.2.5 Reject

The Reject is a message from the BSS to the SMLC. It is a possible response to TA Request, MS Position Command or U-TDOA Request and contains the following information elements.

Table 4.2.5.1: Reject message content

| Information element | Type/Reference | Presence | Format | Length |
|---------------------|-----------------------|----------|--------|--------|
| Message Type | Message Type IE / 5.1 | M | V | 1 |
| Cause | Cause IE / 5.14 | M | TV | 2 |

The following are the expected cause values for Reject message:

- congestion;
- channel Mode not supported;
- positioning procedure not supported;
- failure for other radio related events;

- incorrect serving cell identity;
- BSSAP-LE Segmentation error.

4.2.6 Reset

The Reset is a message from the BSS to the SMLC. It is sent when the Response message contents for a positioning request are invalidated (e.g. due to handover) before the positioning procedure was completed.

Table 4.2.6.1: Reset message content

| Information element | Type/Reference | Presence | Format | Length |
|---|---------------------------------------|-----------------|--------|--------|
| Message Type | Message Type IE / 5.1 | M | V | 1 |
| Cell ID | Cell Identity IE / 5.4 | M | TV | 3 |
| Timing Advance | Timing Advance IE / 5.2 | M | TV | 2 |
| Channel description | Channel Description IE / 5.8 | M | TV | 4 |
| Cause | Cause IE / 5.1 | M | TV | 2 |
| Measurement Report | Measurement Report IE / 5.12 | O | TLV | 18 |
| Enhanced Measurement Report | Enhanced Measurement Report IE / 5.18 | O | TLV | 4-n |
| Measured Cell Identity List | Cell Identity List IE / 5.17 | O | TLV | 6-n |
| LAC | Location Area Code IE / 5.19 | O | TV | 3 |
| Frequency List | Frequency List IE 5.20 | C (note 1) | TLV | 3-n |
| Channel Mode | Channel Mode IE 5.26 | C (notes 2 & 4) | TV | 2 |
| MultiRate Configuration | MultiRate Configuration 5.27 | C (notes 3 & 4) | TLV | 4-n |
| Packet Channel Description | Packet Channel Description IE 5.29 | C (note 5) | TV | 4 |
| TLLI | TLLI IE 5.30 | C (note 5) | TV | 5 |
| TFI | TFI 5.31 | C (note 5) | TV | 2 |
| TBF Starting Time | Starting Time IE 5.32 | C (note 5) | TV | 3 |
| NOTE 1: The Frequency List IE is included only for U-TDOA when frequency hopping is used. | | | | |
| NOTE 2: The Channel Mode IE is included only for U-TDOA using FR or AMR (not included for EFR). | | | | |
| NOTE 3: The MultiRate Configuration IE is included only for U-TDOA using AMR. | | | | |
| NOTE 4: This IE can only be present for CS U-TDOA location method | | | | |
| NOTE 5: This IE can only be present for PS U-TDOA location method | | | | |

The following are the expected cause values for Reset message:

- intra-BSS handover;
- failure for other radio related events;
- supervision Timer Expired;
- incorrect serving cell identity.

4.2.7 Abort

The Abort is a message from the BSS to the SMLC. Upon receiving this signal, the SMLC shall abort ongoing positioning procedure.

Table 4.2.7.1: Abort message content

| Information element | Type/Reference | Presence | Format | Length |
|---------------------|-----------------------|----------|--------|--------|
| Message Type | Message Type IE / 5.1 | M | V | 1 |
| Cause | Cause IE / 5.14 | M | TV | 2 |

The following are the expected cause values for Abort message:

- failure for other radio related events;
- supervision Timer Expired;

- inter BSS handover;
- loss of signalling connection to MS.

4.2.8 TA Layer3

The TA Layer3 is an optional encapsulated message from the BSS to the SMLC that adds the following information in Complete layer 3 Information as described in 3GPP TS 48.008.

Table 4.2.8.1: TA Layer3 message content

| Information element | Type/Reference | Presence | Format | Length |
|-----------------------------|---------------------------------------|----------|--------|--------|
| Message Type | Message Type IE / 5.1 | M | V | 1 |
| Timing Advance | Timing Advance IE / 5.2 | M | TV | 2 |
| Measurement Report | Measurement Report IE / 5.12 | O | TLV | 18 |
| Enhanced Measurement Report | Enhanced Measurement Report IE / 5.18 | O | TLV | 4-n |
| Measured Cell Identity List | Cell Identity List IE / 5.17 | O | TLV | 6-n |

4.2.9 MS Position Command

The BSSLAP MS Position Command is a message from the SMLC to BSS that contains the following information elements.

Table 4.2.9.1: MS Position Command message content

| Information element | Type/Reference | Presence | Format | Length |
|---------------------|-----------------------|----------|--------|--------|
| Message Type | Message Type IE / 5.1 | M | V | 1 |
| flag | RRLP flag IE / 5.15 | M | TV | 2 |
| RRLP Info | RRLP IE / 5.16 | M | TLV | 3-n |

4.2.10 MS Position Response

The BSSLAP MS Position Response is a message from the BSS to the SMLC that contains the following information elements.

Table 4.2.10.1: MS Position Response message content

| Information element | Type/Reference | Presence | Format | Length |
|-----------------------------|---------------------------------------|----------|--------|--------|
| Message Type | Message Type IE / 5.1 | M | V | 1 |
| flag | RRLP flag IE / 5.15 | M | TV | 2 |
| RRLP Info | RRLP IE / 5.16 | M | TLV | 3-n |
| Timing Advance | Timing Advance IE / 5.2 | O | TV | 2 |
| Measurement Report | Measurement Report IE / 5.12 | O | TLV | 18 |
| Enhanced Measurement Report | Enhanced Measurement Report IE / 5.18 | O | TLV | 4-n |
| Measured Cell Identity List | Cell Identity List IE / 5.17 | O | TLV | 6-n |

4.2.11 U-TDOA Request

The U-TDOA Request is a message from the SMLC to the BSS. It contains the following information elements.

Table 4.2.11.1: U-TDOA Request message content

| Information element | Type/Reference | Presence | Format | Length |
|---|-----------------------------------|------------|--------|--------|
| Message Type | Message Type IE 5.1 | M | V | 1 |
| Delta Timer | Delta Timer IE 5.22 | O (note 1) | TV | 2 |
| Polling Repetition | Polling Repetition IE 5.28 (note) | C (note 2) | TV | 2 |
| NOTE 1: This IE can only be present for CS U-TDOA location method | | | | |
| NOTE 2: This IE is only present for PS U-TDOA location method | | | | |

4.2.12 U-TDOA Response

The U-TDOA Response is a message from the BSS to the SMLC. It is a response to the U-TDOA Request message. It contains the following information elements.

Table 4.2.12.1: U-TDOA Response message content

| Information element | Type/Reference | Presence | Format | Length |
|-----------------------------|------------------------------------|-----------------|--------|--------|
| Message Type | Message Type IE 5.1 | M | V | 1 |
| Channel Description | Channel Description IE 5.8 | M | TV | 4 |
| Serving Cell Identifier | Cell Identifier IE 5.23 | M | TLV | 4-n |
| Frequency List | Frequency List IE 5.20 | C (note 3) | TLV | 3-n |
| Timing Advance | Timing Advance IE 5.2 | O | TV | 2 |
| MS Power | MS Power IE 5.21 | O | TV | 2 |
| Measurement Report | Measurement Report IE 5.12 | O | TLV | 18 |
| Encryption Key (Kc) | Encryption Key IE 5.24 | C (note 4) | TV | 9 |
| Cipher Mode Setting | Cipher Mode Setting IE 5.25 | C (note 4) | TV | 2 |
| Channel Mode | Channel Mode IE 5.26 | C (notes 1 & 4) | TV | 2 |
| MultiRate Configuration | MultiRate Configuration IE 5.27 | C (notes 1 & 4) | TLV | 4-n |
| Measured Cell Identity List | Cell Identity List IE / 5.17 | O | TLV | 6-n |
| Packet Channel Description | Packet Channel Description IE 5.29 | C (note 5) | TV | 4 |
| TLLI | TLLI IE 5.30 | C (note 5) | TV | 5 |
| TFI | TFI IE 5.31 | C (note 5) | TV | 2 |
| TBF Starting Time | Starting Time IE 5.32 | C (note 5) | TV | 3 |

NOTE 1: The Channel Mode IE is included only for U-TDOA using FR or AMR (not included for EFR).

NOTE 2: The MultiRate Configuration IE is included only for U-TDOA using AMR.

NOTE 3: The Frequency List IE is included only when frequency hopping is used. NOTE 4: This IE can only be present for CS U-TDOA location method

NOTE 5: This IE can only be present for PS U-TDOA location method

5 Information element encodings

This paragraph contains the coding of the signalling elements used.

The following conventions are assumed for the sequence of transmission of bits and bytes:

- each bit position is marked as 1 to 8. Bit 1 is the least significant bit and is transmitted first;
- in an element octets are identified by number, octet 1 is transmitted first, then octet 2 etc.

When a field extends over more than one octet, the order of bit values progressively decreases as the octet number increases. The least significant bit of the field is represented by the lowest numbered bit of the highest numbered octet of the field.

- For variable length elements a length indicator is included, this indicates the number of octets following in the element.
- All fields within Information Elements are mandatory unless otherwise specified. The Information Element Identifier shall always be included.

All spare bits are set to 0.

The elements used and their coding are:

Table 5.1: Element Identifier codes

| Element Identifier Coding | Element name | Reference |
|---|-----------------------------|-----------|
| 0000 0001 | Timing Advance | 5.2 |
| 0000 1000 | Reserved (note) | |
| 0000 1001 | Cell Identity | 5.4 |
| 0000 1010 | Reserved (note) | |
| 0000 1011 | Reserved (note) | |
| 0000 1100 | Reserved (note) | |
| 0001 0000 | Channel Description | 5.8 |
| 0001 0001 | Reserved (note) | |
| 0001 0010 | Reserved (note) | |
| 0001 0011 | Reserved (note) | |
| 0001 0100 | Measurement Report | 5.12 |
| 0001 0101 | Reserved (note) | |
| 0001 1000 | Cause | 5.14 |
| 0001 1001 | RRLP Flag | 5.15 |
| 0001 1011 | RRLP IE | 5.16 |
| 0001 1100 | Cell Identity List | 5.17 |
| 0001 1101 | Enhanced Measurement Report | 5.18 |
| 0001 1110 | Location Area Code | 5.19 |
| 0010 0001 | Frequency List | 5.20 |
| 0010 0010 | MS Power | 5.21 |
| 0010 0011 | Delta Timer | 5.22 |
| 0010 0100 | Serving Cell Identifier | 5.23 |
| 0010 0101 | Encryption Key (Kc) | 5.24 |
| 0010 0110 | Cipher Mode Setting | 5.25 |
| 0010 0111 | Channel Mode | 5.26 |
| 0010 1000 | MultiRate Configuration | 5.27 |
| 0010 1001 | Polling Repetition | 5.28 |
| 0010 1010 | Packet Channel Description | 5.29 |
| 0010 1011 | TLLI | 5.30 |
| 0010 1100 | TFI | 5.31 |
| 0010 1101 | Starting Time | 5.32 |
| NOTE: These values of the codepoints shall not be used as they were used in an earlier version of the protocol. | | |

All unassigned codes are spare.

5.1 Message Type IE

Message Type uniquely identifies the message being sent. It is a single octet element, mandatory in all messages.

All unassigned codes are spare.

Table 5.1.1: Message Type codes

| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|---|---|---|---|---|---|---|---|----------------------|
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Reserved. |
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | TA REQUEST |
| 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | TA RESPONSE |
| 0 | 0 | 0 | 0 | 1 | 1 | 0 | 0 | Reserved (note) |
| 0 | 0 | 0 | 0 | 1 | 0 | 1 | 0 | Reserved (note) |
| 0 | 0 | 0 | 1 | 0 | 1 | 0 | 0 | REJECT |
| 0 | 0 | 0 | 1 | 0 | 1 | 1 | 0 | RESET |
| 0 | 0 | 0 | 1 | 1 | 0 | 0 | 0 | ABORT |
| 0 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | TA LAYER3 |
| 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | MS Position Command |
| 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | MS Position Response |
| 0 | 0 | 0 | 1 | 0 | 0 | 0 | 1 | U-TDOA Request |
| 0 | 0 | 0 | 1 | 0 | 0 | 1 | 0 | U-TDOA Response |
| NOTE: These values of the codepoints shall not be used as they were used in an earlier version of the protocol. | | | | | | | | |

5.2 Timing Advance IE

This element contains the Timing Advance measured by the BTS.

| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|--------------------|---|---|---|---|---|---|---|---------|
| Element identifier | | | | | | | | octet 1 |
| Timing Advance | | | | | | | | octet 2 |

Figure 5.2.1: Timing Advance IE

The coding of the timing advance value field is the binary representation of the timing advance in bit periods; 1 bit period = 48/13 us, as described in 3GPP TS 44.018 with the difference that all 8 bits are significant (instead of the normal 6 bits), which is necessary in order to report TA from extended range cells. To be correct, values over 63 do not correspond to a TA used by the MS (maximum is 63). Instead values over 63 correspond to the access delay measured by the BTS.

5.3 (void)

5.4 Cell Identity IE

This element defines the cell identity of the MS serving cell.

| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
|--------------------|---|---|---|---|---|---|---|-----------|
| Element identifier | | | | | | | | octet 1 |
| Cell Identity | | | | | | | | octet 2-3 |

Figure 5.4.1: Cell Identity IE

The coding of the Cell Identity field is as defined in 3GPP TS 24.008 (excluding IEI).

5.5 (void)

5.6 (void)

5.7 (void)

5.8 Channel Description IE

This element defines the physical channel allocation of the MS.

| | | | | | | | | |
|---------------------|---|---|---|---|---|---|---|------------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Channel Description | | | | | | | | octets 2-4 |

Figure 5.8.1: Channel Description IE

The coding of Channel Description field is as defined in 3GPP TS 44.018 (excluding IEI).

5.9 (void)

5.10 (void)

5.11 (void)

5.12 Measurement Report IE

This element contains the measurement report from the BSS.

| | | | | | | | | |
|---------------------|---|---|---|---|---|---|---|------------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Length | | | | | | | | octet 2 |
| Measurement Results | | | | | | | | octet 3-18 |

Figure 5.12.1: Measurement Report IE

The Measurement Results field is encoded as in 3GPP TS 44.018 (excluding IEI).

5.13 (void)

5.14 Cause IE

This element contains the cause value.

| | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|---------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Cause value | | | | | | | | octet 2 |

Figure 5.14.1: Cause IE

The cause field is coded as follows:

Table 5.14.1: Cause IE coding

| | |
|---------------------------------|--|
| 0000 0000 | Congestion |
| 0000 0001 | Channel Mode not supported |
| 0000 0010 | Positioning procedure not supported |
| 0000 0011 | Failure for other radio related events |
| 0000 0100 | Intra-BSS handover |
| 0000 0101 | Supervision Timer Expired |
| 0000 0110 | Inter-BSS handover |
| 0000 0111 | Loss of signalling connection to MS |
| 0000 1000 | Incorrect serving cell identity |
| 0000 1001 | BSSAP-LE Segmentation error |
| All unassigned codes are spare. | |

5.15 RRLP Flag IE

This element is coded as:

| | | | | | | | | |
|--------------------|---|---|---|---|---|---|-------|---------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| SPARE | | | | | | | Flag1 | octet 2 |

Figure 5.15.1: RRLP Flag IE

The fields are coded as follows:

Flag 1 (Octet 2, bit 1):

- 0 Position Command (SMLC to BSC) or final response (BSC to SMLC).
- 1 Not a Positioning Command or final response.

5.16 RRLP IE

RRLP IE is coded as:

| | | | | | | | | |
|----------------------------|---|---|---|---|---|---|---|-----------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Length | | | | | | | | octet 2-3 |
| RRLP APDU (3GPP TS 44.031) | | | | | | | | octet 4-n |

Figure 5.16.1: RRLP IE

5.17 Cell Identity List IE

This element defines the list of cell identities of neighbour cells, for which measurements are reported. The Cell Identities are listed in the same order than the corresponding measurements in the (Enhanced) Measurement Report IE.

| | | | | | | | | |
|-----------------------|---|---|---|-------------------------------------|---|---|---|------------------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Length | | | | | | | | octet 2 |
| Spare | | | | octet 3 | | | | octet 3 |
| Cell Identification 1 | | | | | | | | octet 4 to (4+p) |
| ... | | | | | | | | |
| Spare | | | | Cell identification Discriminator N | | | | octet (n-q-1) |
| Cell Identification N | | | | | | | | octet (n-q) to n |

Figure 5.17.1: Cell Identity IE

The coding of octet 2 is a binary number indicating the Length of the remaining element. The Length depends on the Cell identification discriminator *i* as well as the number of cells to be identified.

The Cell identification discriminator *i* is coded as follows:

- 0000 The whole Cell Global Identification, CGI, is used to identify the 2G cells.
- 0001 Location Area Code, LAC, and Cell Identify, CI, are used to identify the 2G cells.
- 0010 3G Cell identification container 1.
- 0011 3G Cell identification container 2.

All other values are reserved.

The coding of the Cell Identification *i* depends on the Cell identification discriminator *i*. Below the coding of the *i*-th Cell Identification is shown for each Cell identification discriminator (with "*i*" in the range 1 to *n*):

Coding of the *i*-th Cell Identification for Cell identification discriminator = 0000.

| | | | | | | | | |
|---------------|---|---|---|-----------|---|---|---|-----------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| MCC dig 2 | | | | MCC dig 1 | | | | octet x+1 |
| MNC dig 3 | | | | MCC dig 3 | | | | octet x+2 |
| MNC dig 2 | | | | MNC dig 1 | | | | octet x+3 |
| LAC | | | | | | | | octet x+4 |
| LAC cont. | | | | | | | | octet x+5 |
| CI value | | | | | | | | octet x+6 |
| CI value cont | | | | | | | | octet x+7 |

Figure 5.17.2: Cell identification for discriminator = 0000

The octet (x+2) bits 5-8 are filled by '1111' if 2 digit MNC is used.

The octets (x+1)-(x+5) are coded as the value part shown in 3GPP TS 24.008, Table 'Location Area Identification information element'.

The octets (x+6)-(x+7) are coded as the value part shown in 3GPP TS 24.008, Table 'Cell Identity information element'.

Coding of *i*-th Cell Identification for Cell identification discriminator = 0001.

| | | | | | | | | |
|---------------|---|---|---|---|---|---|---|-----------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| LAC | | | | | | | | octet x+1 |
| LAC cont. | | | | | | | | octet x+2 |
| CI value | | | | | | | | octet x+3 |
| CI value cont | | | | | | | | octet x+4 |

Figure 5.17.3: Cell identification for discriminator = 0001

The octets (x+1)-(x+2) are coded as the value part shown in 3GPP TS 24.008, Table 'Location Area Identification information element'.

The octets (x+3)-(x+4) are coded as the value part shown in 3GPP TS 24.008, Table 'Cell Identity information element'.

Coding of the Target ID for Cell identification discriminator = 0010.

Octets (x+1) to (x+9) shall be ignored by the receiver.

NOTE: in the 3G Cell identification container 1, the transmitter may send PLMN-ID, LAC, RNC-ID and C-ID to identify a 3G cell.

Coding of the Target ID for Cell identification discriminator = 0011.

Octets (x+1) to (x+6) shall be ignored by the receiver.

NOTE: In the 3G Cell identification container 2, the transmitter may send LAC, RNC-ID and C-ID to identify a 3G cell.

5.18 Enhanced Measurement Report IE

This element contains the measurement report from the BSS.

| | | | | | | | | |
|------------------------------|---|---|---|---|---|---|---|-----------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Length | | | | | | | | octet 2 |
| Enhanced Measurement Results | | | | | | | | octet 3-n |

Figure 5.18.1: Enhanced Measurement Report IE

The Enhanced Measurement Results field is encoded as in 3GPP TS 44.018.

5.19 Location Area Code IE

This element defines the cell identity of the MS serving cell.

| | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|-----------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Location Area Code | | | | | | | | octet 2-3 |

Figure 5.19.1: Location Area Code IE

The coding of the Location Area Code field is as defined in 3GPP TS 24.008 (excluding IEI, MCC, and MNC).

5.20 Frequency List IE

The Frequency List IE contains a list of frequencies used by the MS.

| | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|------------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Length | | | | | | | | octet 2 |
| Frequency List | | | | | | | | octets 3-n |

Figure 5.20.1: Frequency List IE

The coding of Frequency List field is as defined in 3GPP TS 44.018 (excluding IEI and length field).

5.21 MS Power IE

This element contains the MS power.

| | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|---------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| MS Power | | | | | | | | octet 2 |

Figure 5.21.1: MS Power IE

The MS Power field is encoded as in 3GPP TS 44.018 (excluding IEI) and 3GPP TS 45.005.

5.22 Delta Timer IE

This element contains the value of the delta timer. The coding is as follows.

| | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|---------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Timer Value | | | | | | | | octet 2 |

Figure 5.22.1: Delta Timer IE

The Timer Value field is expressed in units of 0,1s.

5.23 Serving Cell Identifier IE

This element uniquely identifies a cell within a BSS and is of variable length containing the following fields:

| | | | | | | | | |
|---------------------|---|---|---|-----------------------------------|---|---|---|-----------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Length | | | | | | | | octet 2 |
| Spare | | | | Cell identification discriminator | | | | octet 3 |
| Cell identification | | | | | | | | octet 4-n |

Figure 5.23.1: Serving Cell Identifier IE

The Serving Cell Identifier IE is encoded as in 3GPP TS 48.008 (excluding IEI and length field).

5.24 Encryption Key IE

This element defines the encryption key (Kc) of the MS being located.

| | | | | | | | | |
|---------------------|---|---|---|---|---|---|---|-----------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Encryption Key (Kc) | | | | | | | | octet 2-9 |

Figure 5.24.1: Encryption Key IE

The Encryption Key (Kc) field contains the ciphering key as provided to the BSS by the MSC in the Encryption Information IE and as defined in TS 48.008.

5.25 Cipher Mode Setting IE

The purpose of the Cipher Mode Setting information element is to indicate whether stream ciphering shall be started or not and if it is to be started, which algorithm to use.

| | | | | | | | | |
|--------------------|------------------|---|---|----------------------|---|---|----|---------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Spare | Ciph Mod Set IEI | | | algorithm identifier | | | SC | octet 2 |

Figure 5.25.1: Cipher Mode Setting IE

The Cipher Mode Setting information element is coded as defined in TS 44.018 (excluding IEI).

5.26 Channel Mode IE

The purpose of the Channel Mode information element is to indicate the mode on coding/decoding and transcoding.

| | | | | | | | | |
|--------------------|---|---|---|---|---|---|---|---------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Mode | | | | | | | | octet 2 |

Figure 5.26.1: Channel Mode IE

The Channel Mode information element is coded as defined in TS 44.018 (excluding IEI).

5.27 MultiRate Configuration IE

The purpose of the MultiRate Configuration information element is to provide all parameters relevant to multi-rate speech codec.

| | | | | | | | | |
|---------------------------------|---|---|-------|------|-------|------------|---|-------------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Length | | | | | | | | octet 2 |
| Multirate speech version | | | NSC B | ICMI | Spare | Start mode | | octet 3 |
| Parameters for multirate speech | | | | | | | | octet 4 - n |

Figure 5.27.1: MultiRate Configuration IE

The MultiRate Configuration information element is coded as defined in TS 44.018 (excluding IEI).

5.28 Polling Repetition IE

This element contains the value of the number of repetitions of the Packet Polling Request procedure. The coding is as follows:

| | | | | | | | | |
|--------------------|---|--|---|---|---|---|---|---------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| Spare | | Number of polling repetitions (binary) | | | | | | octet 2 |

Figure 5.26.1: Polling Repetition IE

The Polling Repetition IE is a binary representation in the range of 4-63.

5.29 Packet Channel Description IE

This element contains the timeslot allocation and frequency parameters. The coding is as follows.

| | | | | | | | | |
|---|---|---|---|---|---|---|---|------------|
| 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | |
| Element identifier | | | | | | | | octet 1 |
| CSN.1 binary representation of the channel parameters as described in TS 44.018 (CCCH) or TS 44.060 (PCCCH) plus padding bits (binary 0) as required to achieve 4 complete octets | | | | | | | | octets 2-5 |

Figure 5.29.1: Packet Channel Description IE

5.30 TLLI IE

The purpose of the *TLLI* information element is to provide the Temporary Logical Link Identifier.

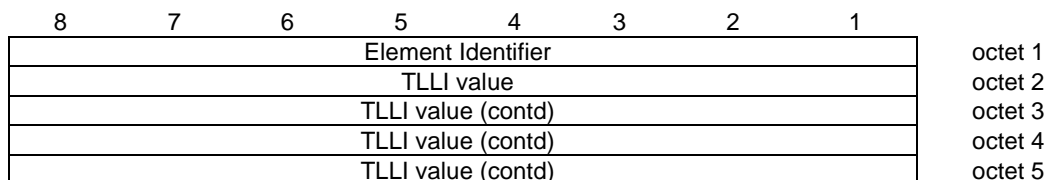


Figure 5.30.1: TLLI IE

The TLLI information element is coded as defined in TS 44.018 (excluding IEI).

5.31 TFI IE

This element contains the value of the TFI. The coding is as follows.




Figure 5.31.1: TFI IE

The TFI information element is coded as defined in TS 44.060 (excluding IEI).

5.32 Starting Time IE

The purpose of the *Starting Time* information element is to provide the start TDMA frame number, FN modulo 42432 of the first transmission of the Packet Polling Request or first block of user data associated with the U-TDOA location method from the BSS to the MS.

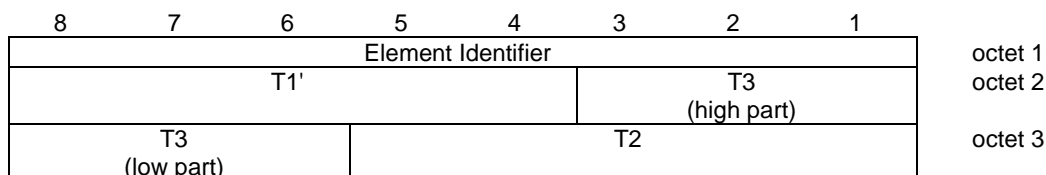


Figure 5.32.1: Starting Time IE

The Starting Time information element is coded and interpreted as defined in TS 44.018 (excluding IEI).

Annex A (informative): Change history

| Meeting | Tdoc | CR | Rev | Subject/Comment | New version |
|----------------|-----------|-----|-----|---|-------------|
| April 2003 | | | | Version 6.0.0 based on version 5.0.1 | 6.0.0 |
| GP-14 | GP-031032 | 009 | 5 | Proposed modification of SMLC-BSS signalling | 6.0.0 |
| - | - | - | - | Figure titles introduced. Figure and table number made sub-clause based. | 6.0.0 |
| GP-15 | GP-031183 | 011 | 2 | Modification of the Reset procedure for U-TDOA | 6.1.0 |
| GP-15 | GP-031186 | 014 | 1 | Correction of the definition of BSSLAP encapsulation in BSSMAP-LE | 6.1.0 |
| - | - | - | - | Style of figure and table numbers updated | 6.1.0 |
| GP-16 | GP-031739 | 015 | | Correction of BSSLAP Reject for U-TDOA | 6.2.0 |
| September 2003 | - | - | - | Direct references to sub-clauses in other specs removed. | 6.2.0 |
| GP-17 | GP-032668 | 016 | 6 | Adding Channel Mode and MultiRate IEs to U-TDOA messages | 6.3.0 |
| GP-17 | GP-032669 | 018 | 1 | Correction of BSSLAP Abort Direction of Transfer | 6.3.0 |
| GP-17 | - | - | - | Reference to 3GPP TS 43.059 made release independent | 6.3.0 |
| GP-18 | GP-040105 | 019 | | Correction of the Encryption Key IE for U-TDOA | 6.4.0 |
| GP-18 | GP-040227 | 020 | 1 | Correction of Length of Enhanced Measurement Report IE | 6.4.0 |
| GP-19 | GP-040855 | 021 | 3 | Removal of emergency services client type restriction from the U-TDOA location method | 6.5.0 |
| GP-19 | GP-040857 | 023 | 1 | Clarification of an indefinite maximum length for BSSLAP IEs | 6.5.0 |
| GP-20 | GP-041674 | 024 | 1 | Addition of missing frequency hopping parameter to the Reset and U-TDOA Response messages | 6.6.0 |
| GP-22 | GP-042572 | 022 | 7 | Inclusion of PS functionality for U-TDOA location method | 6.7.0 |

History

| Document history | | |
|-------------------------|---------------|-------------|
| V6.7.0 | November 2004 | Publication |
| | | |
| | | |
| | | |
| | | |