

ETSI TS 122 262 V18.0.1 (2024-05)



**5G;  
Message service within the 5G System (5GS);  
Stage 1  
(3GPP TS 22.262 version 18.0.1 Release 18)**



---

**Reference**

RTS/TSGS-0122262vi01

---

**Keywords**

5G

**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our  
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	4
Introduction .....	4
1 Scope .....	5
2 References .....	5
3 Definitions, symbols and abbreviations .....	5
3.1 Definitions .....	5
3.3 Abbreviations .....	5
4 Overview .....	6
4.1 General .....	6
4.2 Message communication models.....	6
5 Service requirements .....	7
5.1 General .....	7
5.1.1 Description.....	7
5.1.2 Requirements .....	7
5.2 Point-to-point message .....	8
5.2.1 Description.....	8
5.2.2 Requirements .....	8
5.3 Application-to-point message.....	8
5.3.1 Description.....	8
5.3.2 Requirements .....	8
5.4 Group message .....	9
5.4.1 Description.....	9
5.4.2 Requirements .....	9
5.5 Broadcast message .....	9
5.5.1 Description.....	9
5.5.2 Requirements .....	9
6 Charging .....	9
6.1 Description .....	9
6.2 Requirements.....	9
7 Security.....	10
7.1 Description .....	10
7.2 Requirements.....	10
8 Roaming .....	10
8.1 Description .....	10
8.2 Requirements.....	10
9 Interconnection.....	10
9.1 Description .....	10
9.2 Requirements.....	10
10 Interworking .....	11
10.1 Description .....	11
10.2 Requirements.....	11
<b>Annex A (informative): Change history .....</b>	<b>11</b>
History .....	12

---

# Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# Introduction

The present document covers requirements for a message service used for person-to-thing and thing-to-thing communication within the 5G system (represented by the term MSGin5G Service).

---

# 1 Scope

The present document provides the service requirements for operation of the MSGin5G Service. The MSGin5G Service provides point-to-point, application-to-point, group and broadcast message delivery for person-to-thing communication and thing-to-thing communication.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".

---

# 3 Definitions, symbols and abbreviations

## 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

**application-to-point message:** message that is originated at a UE and terminated at an application sever in the network or originated at an application sever in the network and terminated at a UE.

**MSGin5G Service:** a MNO message service within the 5G System that enables point- to-point, application-to-point, group and broadcast message delivery for thing-to-thing communication and person-to-thing communication.

**MSGin5G Server:** an entity in the 5G system for routing messages between UEs and messages between application servers and UEs.

**MSGin5G Gateway:** an entity in the 5G system for interworking between the MSGin5G Service and non-3GPP message service.

**point-to-point message:** message that is originated at a UE and terminated at a UE.

## 3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

AOMT	Application Originated Mobile Terminated
IoT	Internet of Things
MIoT	Massive Internet of Things
MOAT	Mobile Originated Application Terminated
MOMT	Mobile Originated Mobile Terminated
NIDD	Non IP Data Delivery

## 4 Overview


### 4.1 General

Massive Internet of Things (MIoT) is one of key market segments of 5G. The typical IoT device communication is sending and receiving small data which can be delivered just in a message. Today SMS is used as message enabler for some IoT applications. However, SMS has limitation in term of service capabilities (e.g. 140 bytes payload) and performance (e.g. long latency), in addition, the overhead of control plane resource is high. There have been enhancements and optimizations on the 3GPP network capabilities to facilitate IoT applications including device triggering, small data transfer, and Non IP Data Delivery (NIDD) etc.

Nevertheless, the characteristics of MIoT devices including high density connection, flexible mobility, saving power, limited computing capability, bulk of devices, and traffic pattern of short burst of small data will bring various new demands on message communication, e.g. light weight message communication for provision and monitoring, ultra low latency and high reliability message communication for remote control, and extremely high resource efficiency for large scale connections.

The MSGin5G Service is basically designed and optimized for massive IoT device communication including thing-to-thing communication and person-to-thing communication.

### 4.2 Message communication models

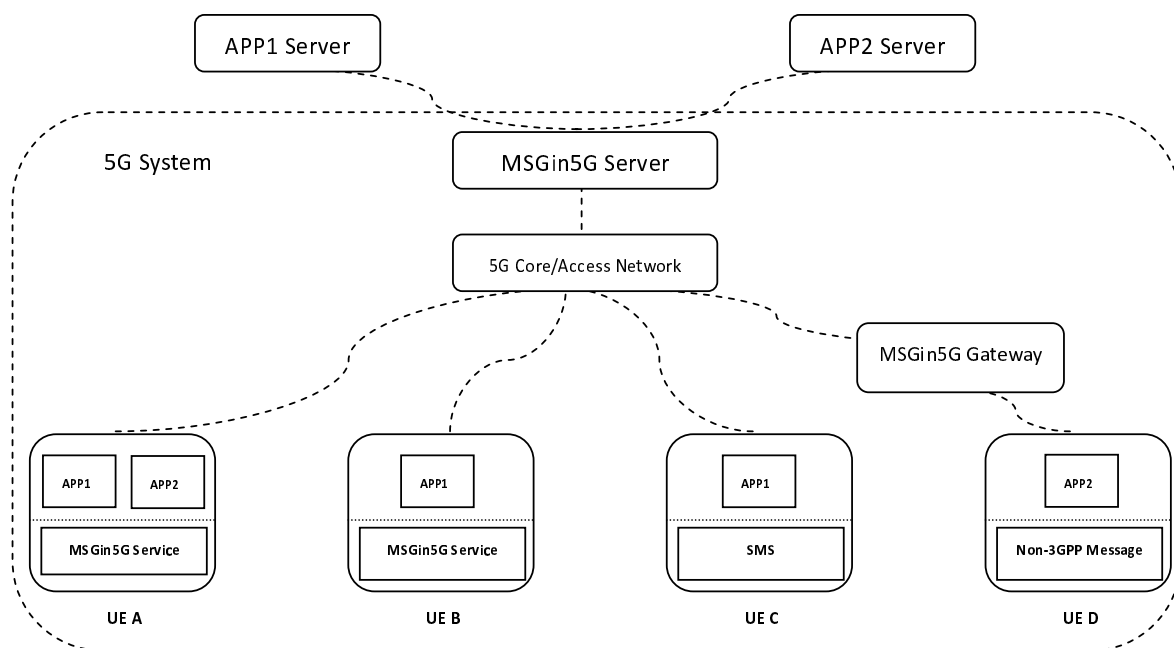

**Figure 4.2 a: The MSGin5G Service overview**

The MSGin5G Service is a message enabler for applications. An application client (APP1 Client) in UE A utilizes MSGin5G Service to send a message to UE B. This message will be routed to UE B via the 5G system, or this message will be first routed to the application server (APP 1 Server) and then forwarded to UE B. If the terminated UE (UE C) supports SMS but does not support the MSGin5G Service, the message will be translated to SMS by MSGin5G Server. A UE (UE D) that does not support 3GPP message service can connect to the MSGin5G Service via MSGin5G Gateway that facilitates the translation between the MSGin5G Service and non-3GPP message service. The connection between the UE D and the gateway can be via 3GPP access or non 3GPP access (e.g. WLAN).

The message communication models include:

- point-to-point message: message that is originated at a UE and terminated at a UEs.

- application-to-point message: message that is originated at a UE and terminated at an application sever in the network or originated at an application sever in the network and terminated at a UE.
- group message: messages are originated at a UE and terminated at a group of UEs (the members of a group can be located in different geographical areas).
- broadcast message: messages are originated at an application sever in the network or an UE and terminated at all the UEs in a specific service area within a cell or multiple cells.

---

## 5 Service requirements

### 5.1 General

#### 5.1.1 Description

The MSGin5G Service enables various message communication models with advanced service capabilities and performance. In addition to point-to-point, application-to-point, group and broadcast message communication are supported in the MSGin5G Service. To meet the requirements of remote control, the MSGin5G Service needs to provide very low end-to-end latency and high reliability of message delivery.

Considering the massive connections of IoT devices and high throughput of message communication between devices or between devices and application servers, the MSGin5G Service needs to be in a resource efficient manner to optimize the resource usage of the both control plane and user plane. The IoT devices usually have limitation in computation and storage, and are powered by batteries or small solar photovoltaic equipment, so the message communications need to be light weight and well scheduled in order to save power and data traffic consumption in the device.

#### 5.1.2 Requirements

[R-5.1.2-001] The MSGin5G Service shall support UE sending and receiving a text or data message with end-to-end latency less than [500] ms.

NOTE 1: Initial connection activation latencies may be longer depending on receiving UE power saving states, paging, etc.

[R-5.1.2-002] The MSGin5G Service shall support variable size of payload of a text or data message with maximum [2048] bytes, and support segmented transmission if the content is large than the maximum payload length of a message.

[R-5.1.2-003] The MSGin5G Service shall support delivery of a message to a specific application in the terminated UE. This message contains the contents that can be handled by the specific application.

[R-5.1.2-004] The MSGin5G Service shall support acknowledgement of delivery status (success, failure) of a message and indication of reason if the delivery is failed.

[R-5.1.2-005] The MSGin5G Service shall support storage of a message if a UE is unavailable (disconnected or power off) for future delivery once the UE becomes available.

[R-5.1.2-006] The MSGin5G Service shall support a server in the network triggering the UE to perform an action (e.g. wake up and establish a PDN connection).

[R-5.1.2-007] The MSGin5G Service shall support a UE sending and receiving messages via a MSGin5G Gateway

NOTE 2: The connection between the UE and the MSGin5G Gateway can be 3GPP or non-3GPP access (e.g. WLAN.)

[R-5.1.2-008] The MSGin5G Service shall support the mobility of a UE (i.e. the UE can still send/receive messages when it changes the location of network access).



[R-5.1.2-009] The MSGin5G Service shall support per-message information for store and forward, e.g. whether the message can be buffered or how long the message is valid.

## 5.2 Point-to-point message

### 5.2.1 Description

The typical IoT communication happens between a person and a thing or two things, where the messages are Mobile Originated and Mobile Terminated (MOMT). A person can use his mobile handset to communicate with multiple smart devices, e.g. wearable devices like intelligent watch and smart home devices like air conditioner. These smart devices may have USIM or not. The MSGin5G Service needs to support addressing the UE by IMSI/MSISDN or IMEI.

There are different applications in a UE that will use point-to-point messages. The MSGin5G Service needs to identify which application a message is to be delivered to and hence route the message to the corresponding application server in the network and application client in the UE.

### 5.2.2 Requirements

[R-5.2.2-001] The MSGin5G Service shall support Mobile Originated Mobile Terminated (MOMT) messaging, i.e. messages are originated and terminated at UEs.

[R-5.2.2-002] The MSGin5G Service shall support addressing the UE by IMSI/MSISDN or IMEI.

[R-5.2.2-003] The MSGin5G Service shall support a mechanism to identify the applicable application and route a MOMT message to the corresponding application server in the network and application client in the UE.

## 5.3 Application-to-point message

### 5.3.1 Description

The application-to-point message enables sending/receiving message between an application server and an IoT device. The message can be Mobile Originated Application Terminated (MOAT) and Application Originated Mobile Terminated (AOMT). The MOAT messages can be used by devices for reporting the small data. For example, in environmental monitoring, a monitoring device sends a message to the application server to report the collected data by the sensor every hour. The AOMT messages can be used by an application server to manage or control the devices. For example, in shared bike communication, the application server sends a message to a bike to unlock the bike.

One type of devices need to report data to the application server in a scheduled way (e.g. every hour). Another type of devices need to be reachable by the application server in a non-scheduled way, e.g. the server updates the configuration of the device. An IoT device that is powered by batteries or small solar photovoltaic equipment, needs to access the MSGin5G Service in the whole lifecycle (e.g. 10 years), which requires the MSGin5G Service be very light weight in power consumption. The AOMT messages are time sensitive. The MSGin5G Service needs to support low latency delivery of AOMT messages.

### 5.3.2 Requirements

[R-5.3.2-001] The MSGin5G Service shall support Mobile Originated Application Terminated (MOAT) messaging, i.e. messages are originated at a UE and terminated at an application sever in the network.

[R-5.3.2-002] The MSGin5G Service shall support Application Originated Mobile Terminated (AOMT) messaging, i.e. messages are originated at an application sever in the network and terminated at a UE.

[R-5.3.2-003] The MSGin5G Service shall support Application Originated Mobile Terminated messaging service with max latency of 10 seconds while maintaining battery life of at least 3 months for small data traffic once every hour and typical sized IOT battery [200-500mAh].

## 5.4 Group message

### 5.4.1 Description

In 5G IoT communication, there is a need that a group of devices can communicate with each other, which means the message sent by a device will be received by all the other devices in the group. The members of a group can be devices for persons and smart things that are located in different geographical areas. Group management mechanism is required to support the members joining or leaving a group.

### 5.4.2 Requirements

[R-5.4.2-001] The MSGin5G Service shall support group message communication, i.e. a UE sends a message to a group of UEs. All the members in a group can send messages. The UEs in a group can be located in different geographical areas.

[R-5.4.2-002] The MSGin5G Service shall support group management for message communication:

- establishing/deleting a group
- adding UEs to the group or removing UEs from the group
- configuration of a maximum number of members in a group

## 5.5 Broadcast message

### 5.5.1 Description

The MSGin5G Service for MIoT needs to support broadcast message delivery in order to handle the massive communications efficiently without long latency. The receivers of broadcast messages can be all UEs within a cell or multiple cells. The broadcast areas can be configured according to the policy of application.

To avoid malicious attack, only authorized UEs or application server can send broadcast messages.

### 5.5.2 Requirements

[R-5.5.2-001] The MSGin5G Service shall support broadcasting a text or data message with end-to-end latency less than [500] ms.

[R-5.5.2-002] The MSGin5G Service shall support an authorized application server or UE to send a broadcast message to all the UEs within a specific area which is configured according to application policy.

---

## 6 Charging

### 6.1 Description

The business model of MIoT market may be different from that of consumer market. The MNO may need flexible policy for charging of the MSGin5G Service, e.g., flat rate (per month or per year), charge per message, and charge by amount of data. For different message communication models, the charging policy may be distinguished. The MSGin5G Service needs to provide charging information to support different charging policy.

### 6.2 Requirements

[R-6.2-001] The MSGin5G Service shall be able to collect charging information of a UE according to the operator's charging policy including charge per message, charge by amount of data, and flat rate (e.g., per month or per year).

[R-6.2-002] The MSGin5G Service shall be able to collect charging information of an application provider in application-to-point message communication.

---

## 7 Security

### 7.1 Description

The messages of thing-to-thing or person-to-thing can be critical, e.g., a message for remote control may trigger actions of a device. To protect an IoT device from malicious attack, only authorized UEs can send messages to this device. In addition, the content of messages need to be integrity and confidentiality protected.

The IoT devices may be battery-powered, so the security mechanism for MSGin5G needs to be light weight.

### 7.2 Requirements

[R-7.2-001] The MSGin5G Service shall support a mechanism for the operator to configure the allow-list of UEs that are authorized to send messages to a specific UE. The MSGin5G Service shall be able to block messages from non-authorized UEs.

[R-7.2-002] The MSGin5G Service shall support integrity and confidentiality protection for the payload of a message.

---

## 8 Roaming

### 8.1 Description

The IoT device can be a device equipped in a vehicle moving from one nation to another nation. When roaming, the device needs to be able to access to the MSGin5G Service.

### 8.2 Requirements

[R-8.2-001] The MSGin5G Service shall support a roaming UE sending and receiving messages.

---

## 9 Interconnection

### 9.1 Description

The MSGin5G Service is a service that can involve two different operators on originating and terminating side, and hence interconnection is needed.

### 9.2 Requirements

[R-9.2-001] The MSGin5G Service shall support an UE within an operator sending a message to another UE within another operator.

[R-9.2-002] The MSGin5G Service shall support an application server sending/receiving a message to/from a UE within another operator.

## 10 Interworking

### 10.1 Description

The legacy IoT devices have been widely deployed. These devices may support legacy message service like SMS. When the terminated UE does not support the MSGin5G Service, interworking between MSGin5G Service and another message service (e.g., SMS) is required subject to the operator's policy.

### 10.2 Requirements

[R-10.2-001] The MSGin5G Service shall be able to interwork with SMS for point-to-point message and application-to-point message.

[R-10.2-002] The MSGin5G Service shall be able to translate one message into multiple SMS messages when the length of a message of MSGin5G Service is large than the maximum length of a SMS message.

## Annex A (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2018-11	SA1#84	S1-183137				Including agreed docs: S1-183038, S1-183472, S1-183457, S1-183454, S1-183096, S1-183456, S1-183152	0.1.0
2018-12	SA#82	SP-181010	-	-	-	Presentation for one-step approval to SA	1.0.0
2018-12	SA#82	SP-181010	-	-	-	Raised to v.16.0.0 following SA#82's one-step approval	16.0.0
2021-09	SA#93e	SP-211033	0001	2	F	MSGin5G store-and-forward modifications	17.0.0
2022-03	SP#95e	SP-220081	0002	1	D	Non-inclusive language replacement	17.1.0
2024-03	SA#103	-	-	-	-	Updated to Rel-18 by MCC (and issue with v.18.0.0 upload)	18.0.1

---

# History

<b>Document history</b>		
V18.0.1	May 2024	Publication