



LTE;
Application layer support for Uncrewed Aerial System (UAS);
Functional architecture and information flows;
(3GPP TS 23.255 version 19.5.0 Release 19)



ReferenceRTS/TSGS-0623255vj50

KeywordsLTE

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards application](#).

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver repository](#).

Users should be aware that the present document may be revised or have its status changed,
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2026.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	9
Introduction	10
1 Scope	11
2 References	11
3 Definitions of terms and abbreviations.....	12
3.1 Terms.....	12
3.2 Abbreviations	13
4 Architectural requirements	14
4.1 General	14
4.2 Support for communications between UAVs	14
4.2.1 Description.....	14
4.2.2 Requirements	14
4.3 QoS provisioning for C2 communication.....	14
4.3.1 Description.....	14
4.3.2 Requirements	14
4.4 C2 communication mode switching	14
4.4.1 Description.....	14
4.4.2 Requirements	14
4.5 Support for monitoring of UAV location deviation	15
4.5.1 Description.....	15
4.5.2 Requirements	15
4.6 Support for reporting of UAV events	15
4.6.1 Description.....	15
4.6.2 Requirements	15
4.7 Support for multi-USS deployments	15
4.7.1 Description.....	15
4.7.2 Requirements	15
4.8 Support of detect and avoid services and applications	16
4.8.1 Description.....	16
4.8.2 Requirements	16
4.9 Support for NTZ indication	16
4.9.1 Description.....	16
4.9.2 Requirements	16
5 Functional model.....	16
5.1 General	16
5.2 Functional model description	16
5.3 Functional entities description.....	19
5.3.1 General.....	19
5.3.2 UAS application specific client	19
5.3.3 UAS application specific server.....	20
5.3.4 UAE client	20
5.3.5 UAE server	20
5.3.6 SEAL client	21
5.3.7 SEAL server.....	21
5.4 Reference points description	21
5.4.1 General.....	21
5.4.2 U1-AE.....	21
5.4.3 U1-APP.....	21
5.4.4 U2-AE.....	21

5.4.5	U2-APP	21
5.4.6	Us	22
5.4.7	Uc	22
5.4.8	SEAL-C	22
5.4.9	SEAL-S	22
5.4.10	SEAL-PC5	22
5.4.11	SEAL-UU	22
5.4.12	UAE-E	23
5.5	External reference points	23
5.5.1	General	23
5.5.2	Rx	23
5.5.3	MB2-C	23
5.5.4	MB2-U	23
5.5.5	xMB-C	23
5.5.6	xMB-U	23
5.5.7	T8	23
5.5.8	N5	24
5.5.9	N33/Nnef	24
6	Identities	24
6.1	General	24
6.2	UAV Identifier (UAV ID)	24
6.3	UAS Identifier (UAS ID)	24
6.4	UAS Application Specific Server Identifier (UASS ID)	24
6.5	UAE Server Identifier (UAE Server ID)	24
7	Procedures and information flows	24
7.1	Usage of SEAL services	24
7.1.1	General	24
7.1.2	Group management service	25
7.1.2.1	General	25
7.1.2.2	Information flows	25
7.1.2.3	Procedures	26
7.1.2.4	APIs	26
7.1.3	Location management service	26
7.1.3.1	General	26
7.1.3.2	Information flows	27
7.1.3.3	Procedures	27
7.1.3.4	APIs	27
7.1.4	Network resource management service	28
7.1.4.1	General	28
7.1.4.2	Information flows	28
7.1.4.3	Procedures	28
7.1.4.4	APIs	29
7.1.5	Network slice capability exposure service	29
7.1.5.1	General	29
7.1.5.2	Information flows	29
7.1.5.3	Procedures	30
7.1.5.4	APIs	30
7.1a	UAE layer registration	30
7.1a.1	General	30
7.1a.2	Procedures	30
7.1a.2.1	UAS UE registration	30
7.1a.2.1.1	General	30
7.1a.2.1.2	Procedure	31
7.1a.2.2	UAS UE deregistration	31
7.1a.2.2.1	General	31
7.1a.2.2.2	Procedure	31
7.1a.2.3	UAS UE registration update	32
7.1a.2.3.1	General	32
7.1a.2.3.2	Procedure	32
7.1a.3	Information flows	32

7.1a.3.1	Registration request.....	32
7.1a.3.2	Registration response	32
7.1a.3.3	Deregistration request	33
7.1a.3.4	Deregistration response	33
7.1a.3.5	Registration update request	33
7.1a.3.6	Registration update response.....	33
7.2	Communications between UAVs within a geographical area	34
7.2.1	General.....	34
7.2.2	Procedures.....	34
7.2.2.1	Communications between UAVs within a geographical area using unicast Uu	34
7.2.3	Information flows	34
7.2.3.1	UAV application message.....	34
7.3	UAV and UAV-C Pairing and C2 QoS Provisioning using Group ID.....	35
7.3.1	General.....	35
7.3.2	Procedures.....	35
7.3.2.1	Procedure for group creation for one pair of UAV and UAV-C	35
7.3.2.2	Procedure for group-based approach for C2 QoS provisioning	36
7.3.3	Information flows	37
7.4	C2 Communication mode selection and switching	37
7.4.1	General.....	37
7.4.2	Procedures.....	38
7.4.2.1	Management of C2 mode selection / switching capability	38
7.4.2.2	C2 communication modes configuration	38
7.4.2.3	C2 communication mode selection by UAE Client	39
7.4.2.4	UAE-layer assisted dynamic C2 mode switching	40
7.4.2.5	UAS application specific server triggered C2 communication mode switching	42
7.4.3	Information flows	42
7.4.3.1	C2 operation mode management request	42
7.4.3.2	C2 operation mode management response	45
7.4.3.3	C2 operation mode management complete	45
7.4.3.4	C2-related trigger event report	45
7.4.3.5	C2 mode switching confirmation request.....	46
7.4.3.6	C2 mode switching confirmation response	46
7.4.3.7	C2 operation mode switching.....	47
7.4.3.8	C2 communication modes configuration request	47
7.4.3.9	C2 communication modes configuration response.....	50
7.4.3.10	C2 communication mode notification.....	50
7.4.3.11	C2 communication mode notification acknowledgement	50
7.4.3.12	C2 operation mode switching performed	51
7.5	Real-Time UAV Connection Status Monitoring and Location reporting.....	51
7.5.1	General.....	51
7.5.2	Procedures.....	51
7.5.2.1	Procedure for real-time UAV network connection status monitoring and location update.....	51
7.5.2.2	Subscription for real-time UAV status information	52
7.5.2.3	Notification of real-time UAV status information	53
7.5.2.4	Unsubscription for real-time UAV status information	53
7.5.3	Information flows	53
7.5.3.1	Information flows between UAE server and SEAL servers.....	53
7.5.3.2	Subscribe real-time UAV status information request.....	54
7.5.3.3	Subscribe real-time UAV status information response	54
7.5.3.4	Notify real-time UAV status information	54
7.5.3.5	Unsubscribe real-time UAV status information request.....	54
7.5.3.6	Unsubscribe real-time UAV status information response	55
7.6	Change of USS during flight	55
7.6.1	General.....	55
7.6.2	Procedures.....	55
7.6.2.1	Management of multi-USS configuration	55
7.6.2.2	Multi-USS configuration.....	56
7.6.2.3	UAE layer assisted change of USS	56
7.6.2.4	UAE client assisted change of USS	57
7.6.2.5	UAE server triggered change of USS.....	58
7.6.3	Information flows	59

7.6.3.1	Multi-USS management request	59
7.6.3.2	Multi-USS management response	60
7.6.3.3	Multi-USS management complete	60
7.6.3.4	Multi-USS configuration request	61
7.6.3.5	Multi-USS configuration response	61
7.6.3.6	USS change request	61
7.6.3.7	USS change response	62
7.6.3.8	USS change notification	62
7.6.3.9	USS change trigger notify	62
7.7	UAE layer support for DAA services and applications	63
7.7.1	General	63
7.7.2	Procedures	63
7.7.2.1	Configuration of DAA policies to the UAE layer and the UAS client	63
7.7.2.1.1	Management of DAA support configuration	63
7.7.2.1.2	DAA support configuration procedure	64
7.7.2.2	UAE layer support for DAA applications	65
7.7.2.2.1	DAA support involving UAVs with U2X support	65
7.7.2.2.2	DAA support involving UAVs without U2X support	65
7.7.3	Information flows	66
7.7.3.1	DAA support management request	66
7.7.3.2	DAA support management response	67
7.7.3.3	DAA support management complete	67
7.7.3.4	DAA support configuration request	67
7.7.3.5	DAA support configuration response	68
7.7.3.6	DAA client event information	68
7.7.3.7	DAA client event information acknowledge	69
7.7.3.8	DAA server event information	69
7.7.3.9	DAA server event information acknowledge	70
7.8	Tracking dynamic UAVs in an application defined area relative to a host UAV	70
7.8.1	General	70
7.8.2	Procedures	71
7.8.2.1	Subscription for host UAV dynamic information	71
7.8.2.2	Management of dynamic UE location based group	71
7.8.2.3	Obtaining dynamic information of the UEs in application defined proximity range	73
7.8.2.3.1	Subscription procedure within UAS operator	73
7.8.2.3.2	Subscription procedure across UAS operators	73
7.8.2.3.3	Notification procedure	74
7.8.2.4	Notification of host UAV dynamic information	74
7.8.2.5	Unsubscription for host UAV dynamic information	75
7.8.3	Information flows	75
7.8.3.1	Subscribe host UAV dynamic information request	75
7.8.3.2	Subscribe host UAV dynamic information response	75
7.8.3.3	Notify Host UAV dynamic information	76
7.8.3.4	Notification of dynamic information	76
7.8.3.5	Unsubscribe host UAV dynamic information request	76
7.8.3.6	Unsubscribe host UAV dynamic information response	76
7.9	Support of real time UAV flight path monitoring assistance	77
7.9.1	General	77
7.9.2	Procedures	77
7.9.2.1	Real time UAV flight path monitoring assistance procedure	77
7.9.2.2	Real time flight path monitoring assistance configuration of UAE Client	78
7.9.2.3	Real time flight path reporting procedure	78
7.9.3	Information flows	79
7.9.3.1	Flight path reporting configuration request	79
7.9.3.2	Flight path reporting configuration response	81
7.9.3.3	Flight path reporting configuration complete	81
7.9.3.4	Flight path reporting client configuration request	81
7.9.3.5	Flight path reporting client configuration response	82
7.9.3.6	Flight path event report	83
7.9.3.7	Flight path event report notification	83
7.10	UAS provided flight routes	84
7.10.1	General	84

7.10.2	Procedures.....	84
7.10.2.1	Flight route support	84
7.10.3	Information flows	84
7.10.3.1	Flight route request	84
7.10.3.2	Flight route reply.....	85
7.11	UAE layer support for NTZ	85
7.11.1	General.....	85
7.11.2	Procedures.....	85
7.11.2.1	Management of NTZ support configuration	85
7.11.2.2	NTZ configuration	86
7.11.2.3	NTZ activation by UAE Client	87
7.11.2.4	UAE-layer/SEAL/LMS assisted NTZ enforcement.....	88
7.11.2.5	New USS NTZ policy	89
7.11.3	Information flows	89
7.11.3.1	NTZ management request	89
7.11.3.2	NTZ management response.....	90
7.11.3.3	NTZ management complete	90
7.11.3.4	NTZ configuration request.....	90
7.11.3.5	NTZ configuration response.....	91
7.11.3.6	NTZ notification	91
7.11.3.7	New NTZ policy request	92
7.11.3.8	New NTZ policy response	92
7.11.3.9	Enforce NTZ request.....	93
7.11.3.10	Enforce NTZ response	93
8	APIs.....	94
8.1	General	94
8.2	UAE server APIs.....	94
8.2.1	General.....	94
8.2.2	UAE_C2OperationModeManagement API	95
8.2.2.1	General	95
8.2.2.2	Manage_C2OperationMode operation	96
8.2.2.3	Notify_SelectedC2Mode.....	96
8.2.2.4	Notify_C2ModeSwitching	96
8.2.2.5	Notify_C2OperationModeManagementComplete	96
8.2.3	UAE_ RealtimeUAVStatus API	96
8.2.3.1	General	96
8.2.3.2	Subscribe_ RealtimeUAVStatus operation	97
8.2.3.3	Unsubscribe_ RealtimeUAVStatus operation	97
8.2.3.4	Notify_ RealtimeUAVStatus operation.....	97
8.2.4	UAE_ChangeUSSManagement API	97
8.2.4.1	General	97
8.2.4.2	Manage_USSManagement operation.....	97
8.2.4.3	Notify_USSManagementComplete operation.....	98
8.2.4.4	Manage_USSChange operation	98
8.2.4.5	Notify_USSChange operation.....	98
8.2.4.6	Notify_USSChangeTrigger	98
8.2.5	UAE_DAASupport API	98
8.2.5.1	General	98
8.2.5.2	Manage_DAAManagement operation	99
8.2.5.3	Notify_DAAManagementComplete operation	99
8.2.5.4	Notify_DAAClientSupportEvent operation	99
8.2.5.5	Manage_DAAServerSupportEvent operation	99
8.2.6	UAE_UAVDynamicInfo API.....	99
8.2.6.1	General	99
8.2.6.2	Subscribe_UAVDynamicInfo operation	100
8.2.6.3	Unsubscribe_UAVDynamicInfo operation.....	100
8.2.6.4	Notify_UAVDynamicInfo operation	100
8.2.7	UAE_FlightPathMonitoring API	100
8.2.7.1	General	100
8.2.7.2	Manage_FlightPathReportingConfiguration	100
8.2.7.3	Notify_FlightPathReportingConfigurationComplete	101

8.2.7.4	Notify_FlightPathEventReport.....	101
8.2.8	UAE_FlightRouteSupport API	102
8.2.8.1	General	102
8.2.8.2	Manage_QoSFlightRoutePlan.....	102
8.2.9	UAE_NTZ management API.....	102
8.2.9.1	General	102
8.2.9.2	Manage_NTZ	102
8.2.9.3	Notify_NTZManagementComplete	102
8.2.9	UAE_NTZ configuration API.....	103
8.2.9.1	General	103
8.2.9.2	Configure_NTZ	103
8.2.9.3	Notify_NTZ	103
8.2.10	UAE_NTZ enforce API.....	103
8.2.10.1	General	103
8.2.10.2	Enforce_NTZ.....	103
8.2.11	UAE_newNTZ policy API	104
8.2.11.1	General	104
8.2.11.2	NewPolicy_NTZ.....	104
Annex A (informative): Support for edge deployments		105
Annex B (Informative): Deployment models		106
B.1	General	106
B.2	Deployment of UAE server	106
B.2.1	Centralized deployments	106
B.2.2	Distributed deployment	108
Annex C (informative): Examples of usage of SEAL by UAS application specific server.....		111
Annex D (informative): Change history		112
History		115

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

Introduction

In order to ensure efficient use and deployment of UAS on 3GPP networks an architecture for UAS application layer consisting of UAS application enabler is specified in this document.

The UAE application enabler capabilities takes into consideration the existing stage 1 and stage 2 work within 3GPP related to UAS in 3GPP TS 22.125 [2] and 3GPP TS 23.256 [4].

1 Scope

The present document specifies the functional architecture, procedures and information flows for UAS application enabler layer. This specification includes the capabilities of the application layer support for UAS that are necessary to ensure efficient use and deployment of UAS over 3GPP systems. The UAS application enabler capabilities applies to both EPS and 5GS.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 22.125: "Unmanned Aerial System (UAS) support in 3GPP; Stage 1".
- [3] 3GPP TS 23.222: "Functional architecture and information flows to support Common API Framework for 3GPP Northbound APIs; Stage 2".
- [4] 3GPP TS 23.256: "Support of Uncrewed Aerial Systems (UAS) connectivity, identification, and tracking; Stage 2".
- [5] 3GPP TS 23.434: "Service Enabler Architecture Layer for Verticals (SEAL); Functional architecture and information flows".
- [6] 3GPP TS 23.501: "System architecture for the 5G System (5GS); Stage 2".
- [7] 3GPP TS 23.558: "Architecture for enabling Edge Applications"
- [8] 3GPP TS 23.682: "Architecture enhancements to facilitate communications with packet data networks and applications".
- [9] 3GPP TS 26.346: "Multimedia Broadcast/Multicast Service (MBMS); Protocols and codecs".
- [10] 3GPP TS 26.348: "Northbound Application Programming Interface (API) for Multimedia Broadcast/Multicast Service (MBMS) at the xMB reference point".
- [11] 3GPP TS 29.214: "Policy and Charging Control over Rx reference point".
- [12] 3GPP TS 29.468: "Group Communication System Enablers for LTE (GCSE_LTE); MB2 Reference Point; Stage 3".
- [13] 3GPP TS 23.502: "Procedures for the 5G System (5GS)".
- [14] 3GPP TS 23.435: "Procedures for Network Slice Capability Exposure for Application Layer Enablement Service".
- [15] 3GPP TS 23.288: "Architecture enhancements for 5G System (5GS) to support network data analytics services".

3 Definitions of terms and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

DAA application policy: The configuration provided to the UAS application specific client by a UAS application specific server for handling of detect and avoid.

DAA assist capability: The functionality for the UAE layer to assist the UAV application specific layer with handling of detect and avoid during flight.

LDGS capability: A UAE client with LDGS capability offers the ground based DAA support for the UAVs in the monitoring range of the LDGS. The Local DAA Ground-Station (LDGS) can be operated by a USS and can serve one or more USSes.

Multi-USS capability: The functionality for the UAE layer to assist at change of USS during flight.

NOTE: A UAV with Multi-USS capability can be controlled by more than one USS during a flight, but at any given time, the UAV is under the control of only one USS.

Multi-USS policy: The configuration provided by a UAS application specific server to assist at change of USS.

Remote Identification (Remote ID) of UAS: The ability of a UAS to provide identification and tracking information that can be received by other parties, to facilitate advanced operations for the UAS (such as Beyond Visual Line of Sight operations as well as operations over people), assist regulatory agencies, air traffic management agencies, law enforcement, and security agencies when a UAS appears to be flying in an unsafe manner or where the UAS is not allowed to fly.

UAS Service Supplier (USS): An entity that provides services to support the safe and efficient use of airspace by providing services to the operator / pilot of a UAS in meeting UTM operational requirements. A USS can provide any subset of functionality to meet the provider's business objectives (e.g., UTM, Remote Identification). In the scope of this specification, the term USS refers to both USS and USS/UTM.

UAV: The Uncrewed Aerial Vehicle (also called remotely piloted aircraft or drone) of a UAS.

No-transmit zone: A geographical area where UAVs are not allowed to transmit in a certain frequency band.

For the purposes of the present document, the following terms given in 3GPP TS 22.125 [2] apply

Command and Control (C2) Communication

Uncrewed Aerial System (UAS)

Uncrewed Aerial System Traffic Management (UTM)

UAV controller

For the purposes of the present document, the following terms given in clause 4.2 of 3GPP TS 22.125 [2] apply

Direct C2 Communication

Network-Assisted C2 communication

UTM-Navigated C2 communication

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

BVLOS	Beyond Visual Line Of Sight
CAA	Civil Aviation Authorities
C2	Command and Control
CAPIF	Common API Framework for northbound APIs
DAA	Detect And Avoid
EAS	Edge Application Server
EDN	Edge Data Network
EEC	Edge Enabler Client
EES	Edge Enablement Server
GM	Group Management
GPSI	General Public Subscription Identifier
LDGS	Local DAA Ground Station
LM	Location Management
NRM	Network Resource Management
NTZ	No-Transmit Zone
PQI	PC5 QoS Identifier
QoS	Quality of Service
SEAL	Service Enabler Architecture Layer
UAE	UAS Application Enabler
UAS	Uncrewed Aerial System
UASS	UAS Application Specific Server
UAV	Uncrewed Aerial Vehicle
UAV-C	Uncrewed Aerial Vehicle-Controller
USS	UAS Service Supplier
UTM	UAS Traffic Management

VAL

Vertical Application Layer

4 Architectural requirements

4.1 General

[AR-4.1-a] The UAS application enabler layer shall support one or more UAS applications.

[AR-4.1-b] The UAE capabilities should be offered as APIs to the UAS applications.

4.2 Support for communications between UAVs

4.2.1 Description

This clause specifies the requirements for support for communications between UAVs.

4.2.2 Requirements

[AR-4.2-a] The UAS application enabler layer shall provide mechanism to support communications between UAVs in a geographical area using unicast Uu.

4.3 QoS provisioning for C2 communication

4.3.1 Description

This clause specifies the C2 QoS provisioning related requirements.

4.3.2 Requirements

[AR-4.3.2-a] The UAE layer capabilities shall enable C2 application QoS parameter provisioning for network-assisted C2 communications to the 3GPP network system.

[AR-4.3.2-b] The UAE layer capabilities shall enable QoS differentiation for UAV operations.

[AR-4.3.2-c] The UAE server shall be capable of obtaining monitoring events related to the C2 QoS fulfilment/unfulfilment from the UAE clients (UAV and/or UAV controller).

[AR-4.3.2-d] The UAE layer capabilities shall enable QoS parameters modification to support meeting the C2 end-to-end application requirements, for paired-Uu connections between a UAV and UE-based UAV-C.

4.4 C2 communication mode switching

4.4.1 Description

This clause specifies the C2 communication mode switching related requirements.

4.4.2 Requirements

[AR-4.4.2-a] The UAE Server shall provide a mechanism for configuring the C2 communication modes at the UAE Client (UAV and UAV-C).

[AR-4.4.2-b] The UAE Client (UAV and UAV-C) and UAV Server shall provide mechanisms for switching between the C2 communication links.

[AR-4.4.2-c] The UAE Client (UAV and UAV-C) shall provide a mechanism for selecting a primary and a secondary communication link based on C2 communication mode configuration information.

[AR-4.4.2-d] The UAE Client (UAV or UAV-C) shall provide a mechanism to switch C2 communication link without involving the UAE Server when an immediate change of C2 communication mode is needed.

[AR-4.4.2-e] The UAE Server shall provide a mechanism for monitoring the availability of ProSe/PC5 link for C2 communications.

[AR-4.4.2-f] The UAE Client shall be capable of reporting the availability of ProSe/PC5 link for C2 communications.

4.5 Support for monitoring of UAV location deviation

4.5.1 Description

This clause specifies the requirements for location reporting capabilities to monitor the UAV location deviation.

4.5.2 Requirements

[AR-4.5.2-a] The SEAL layer shall provide mechanism to support the monitoring of UAV location.

4.6 Support for reporting of UAV events

4.6.1 Description

This clause specifies the requirements for support for reporting of UAV events to USS/UTM.

4.6.2 Requirements

[AR-4.6.2-a] The SEAL layer shall provide mechanism to support the reporting of the 3GPP related UAV events to the USS/UTM.

4.7 Support for multi-USS deployments

4.7.1 Description

This clause specifies the requirements for support of multi-USS deployments.

4.7.2 Requirements

[AR-4.7.2-a] The UAE Server shall provide a mechanism for the UAE Client to report its multi-USS capability to the UAE Server.

[AR-4.7.2-b] The UAE Server shall provide a mechanism for enabling USS for configuring the Multi-USS policies to the UAE Client (UAV).

[AR-4.7.2-c] The UAV Server shall provide a mechanism to support change of USS during UAS operations.

[AR-4.7.2-d] The UAE Client (UAV) shall provide a mechanism to support change of USS based on the policies for multi-USS configuration when an immediate change of USS is needed.

4.8 Support of detect and avoid services and applications

4.8.1 Description

This clause specifies the requirements related to support for detect and avoid services and applications.

4.8.2 Requirements

[AR-4.8.2-a] The UAE Server shall provide a mechanism for the UAE Client to report its DAA assist capability to the UAE Server.

[AR-4.8.2-b] The UAE Server shall provide a mechanism for enabling USS for configuring the DAA policies to the UAE Client (UAV).

[AR-4.8.2-c] The UAE layer shall provide a mechanism for a UAS application specific server to obtain DAA related events for a UAV.

[AR-4.8.2-d] The UAS application enabler layer shall provide a mechanism for a UAS application specific client to obtain DAA related events for a UAV.

4.9 Support for NTZ indication

4.9.1 Description

This clause specifies the requirements related to support for indication of UAV NTZ enforcement.

4.9.2 Requirements

[AR-4.9.2-a] The UAE layer capabilities shall enable NTZ provisioning to the 3GPP network system.

[AR-4.9.2-b] The UAE Server shall provide a mechanism for the UAE Client to report NTZ indications to the UAE Server.

[AR-4.9.2-c] The UAE layer shall provide a mechanism for a UAS application specific server to obtain NTZ indication events for a UAV.

[AR-4.9.2-d] The UAS application enabler layer shall provide a mechanism for a UAS application specific client to provide NTZ indications events for a UAV.

5 Functional model

5.1 General

The functional model for the UAS application layer is organized into functional entities to describe a functional architecture which addresses the application layer support aspects for UAS applications.

5.2 Functional model description

Figures 5.2-1 and 5.2-2 illustrates the simplified architectural models for the UAS application layer.



Figure 5.2-1: Simplified architectural model for the UAS application layer




Figure 5.2-2: Simplified architectural model for U2 connectivity between UAS UE1 and UAS UE2 at the UAS application layer

The UAS UE1 communicates with UAS application server over U1 reference point. The UAS UE1 and UAS UE2 communicate over U2 reference point.

NOTE 1: Support for UE-to-network relay architecture for UAS communications is out of scope of the present document.

The UAS UE1 and the UAS UE2 may be a UAV Controller or a UAV.

NOTE 2: The UAV Controller can connect to the UAV via a transport independent of 3GPP. Such UAV Controller is not a 3GPP UE and is out of scope of the present document.

NOTE 3: Support of PC5 at the U2 reference point for 5GS is out of scope of the present document.

The reference point U1 supports the UAS application related interactions between UAS UE and UAS application server. It is expected that this reference point is supported at least for unicast delivery mode, and may support multicast delivery mode. The reference point U2 supports the interactions between the UAS UEs. The UAS application server can be the USS/UTM.

The reference point U1 is based on Uu connectivity as specified in 3GPP TS 23.256 [4].

The reference point U2 is based on Uu connectivity as specified in 3GPP TS 23.256 [4].

NOTE 4: Support of multicast delivery over Uu for 5GS is out of scope of the present document.

Figure 5.2-3 illustrates the detailed UAS application layer functional model. It enhances the simplified architectural model for the UAS application layer by specifying the functional entities at the UAS application layer.

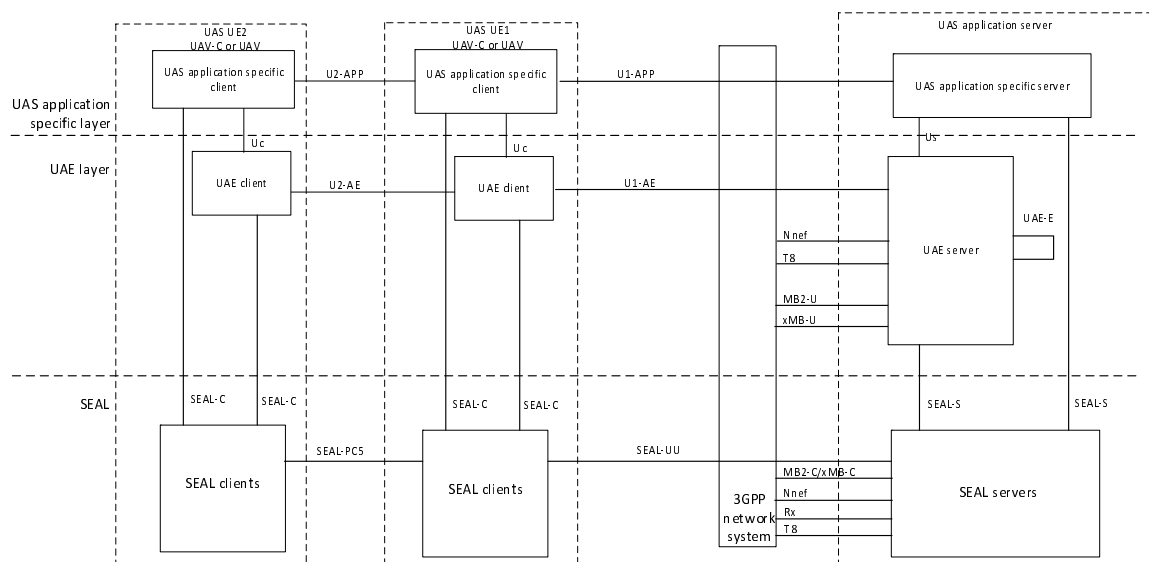


Figure 5.2-3: UAS application layer functional model

Figure 5.2-4 illustrates the detailed UAS application layer functional model where the UAV-C has a network-assisted connectivity with the UAV.

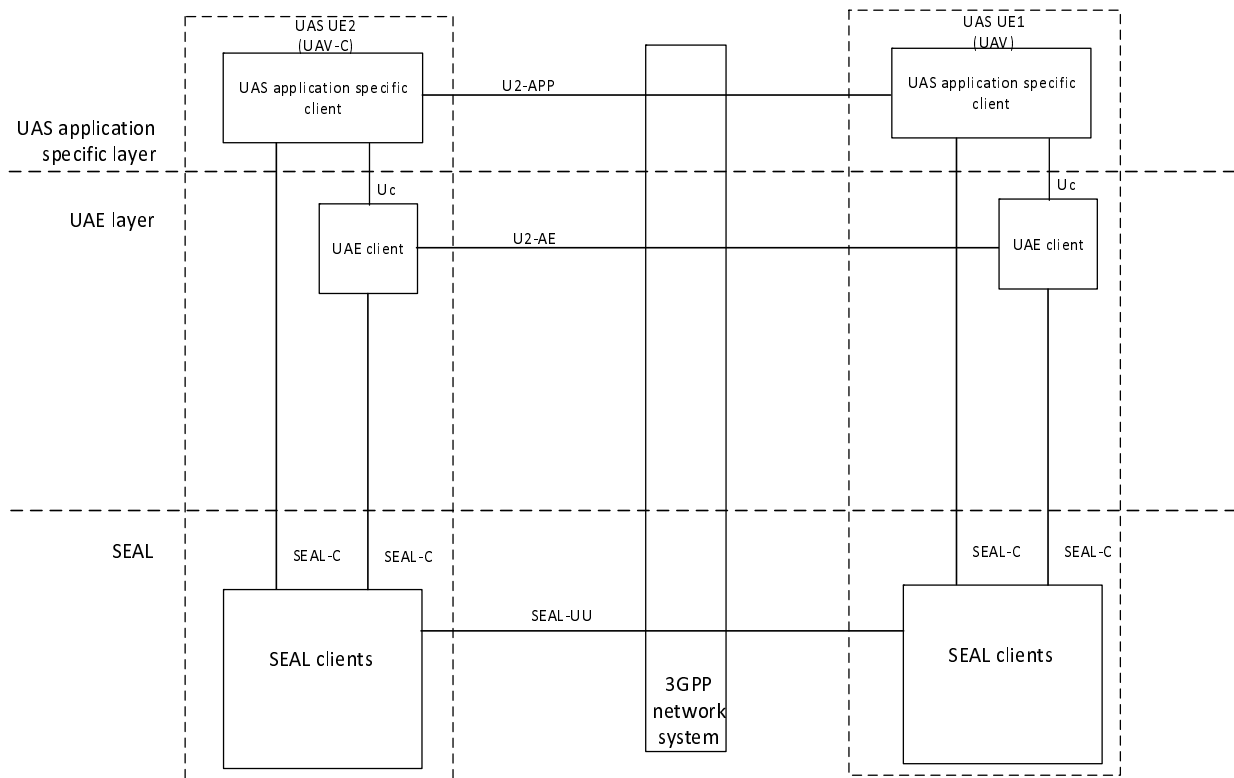


Figure 5.2-4: UAS application layer functional model with UAV-C having network-assisted connectivity with UAV

The UAS application layer functional entities for the UAS UE and the UAS application server are grouped into the UAS application specific layer and the UAE layer. The UAE layer offers the UAE capabilities to the UAS application specific layer. The UAS application layer functional model utilizes the SEAL services as specified in 3GPP TS 23.434 [5].

The UAE server is located in the UAE layer. The SEAL services/UAS application specific layer utilized by UAE layer may include location management, group management, configuration management, identity management, key management and network resource management. The UAS application specific layer consists of the UAS application specific functionalities.

NOTE 5: The functionalities of the UAS application specific layer include the USS/UTM and are out of scope of the present document.

The following connectivity path for the UAS is supported when both the UAV-C and the UAV are 3GPP UEs:

- UAV-C to UAV over U2 (Uu connectivity).

The UAS application server consists of the UAE server, the SEAL servers and the UAS application specific server. The UAE server provides the UAS application layer support functions to the UAS application specific server over Us reference point. The SEAL servers provide the SEAL services to the UAS application specific server/UAE server over SEAL-S reference point.

The UAS UE consists of the UAE client, the SEAL clients and the UAS application specific client. The UAE client provides the UAS application layer support functions to the UAS application specific client over Uc reference point. The SEAL clients provide the SEAL services to the UAS application specific client/UAE client over SEAL-C reference point.

NOTE 6: In some deployments, the client and server entities of SEAL can be part of UAE client and UAE server respectively.

The UAS application specific client/UAE client acts as a VAL client for its interaction with the SEAL clients as specified in 3GPP TS 23.434 [5]. The UAS application specific server/UAE server acts as a VAL server for its interaction with the SEAL servers as specified in 3GPP TS 23.434 [5].

In the UAE layer, the UAE client communicates with the UAE server over U1-AE reference point. In the UAS application specific layer, the UAS application specific client communicates with UAS application specific server over U1-APP reference point.

NOTE 7: The U1-APP reference point includes UAV Controller/UAV to USS/UTM communication and is out of scope of the present document.

In the UAE layer, the UAE client of UAS UE2 communicates with UAE client of UAS UE1 over U2-AE reference point. In the UAS application specific layer, the UAS application specific client of UAS UE2 communicates with UAE client of UAS UE1 over U2-APP reference point.

NOTE 8: The U2-APP reference point is out of scope of the present document.

The following SEAL services for UAS applications may include:

- Location management as specified in 3GPP TS 23.434 [5];
- Group management as specified in 3GPP TS 23.434 [5];
- Configuration management as specified in 3GPP TS 23.434 [5];
- Identity management as specified in 3GPP TS 23.434 [5];
- Key management as specified in 3GPP TS 23.434 [5]; and
- Network resource management as specified in 3GPP TS 23.434 [5].

The UAS application specific client/UAE client interacts with SEAL clients over the SEAL-C reference point specified for each SEAL service. The UAS application specific server/UAE server interacts with SEAL servers over the SEAL-S reference point specified for each SEAL service. The interaction between the SEAL clients is supported by SEAL-PC5 reference point specified for each SEAL service. The interaction between a SEAL client and the corresponding SEAL server is supported by SEAL-UU reference point specified for each SEAL service.

NOTE 9: The SEAL-C, SEAL-S, SEAL-PC5, SEAL-UU reference points for each SEAL service is specified in 3GPP TS 23.434 [5].

To support distributed UAE server deployments, the UAE server interacts with another UAE server over UAE-E reference point.

A U1-AE message can be sent over at least unicast, and may be sent over transparent multicast via xMB or transparent multicast via MB2. The non-transparent multicast via xMB (as specified in 3GPP TS 26.348 [10]) is triggered by a U1-AE message. Multicast distribution can be supported by both transparent and non-transparent multicast modes.

The UAE server interacts with the 3GPP network system over U2, MB2, xMB, Rx, T8 and Nnef reference points.

5.3 Functional entities description

5.3.1 General

Each clause specifies a description of a functional entity corresponding to UAS application layer and does not imply a physical entity.

5.3.2 UAS application specific client

The UAS application specific client provides the client side functionalities corresponding to the UAS applications (e.g. Client interacting with USS/UTM). The UAS application specific client utilizes the UAE client for the UAS application layer support functions.

NOTE: The details of the UAS application specific client is out of scope of the present document.

5.3.3 UAS application specific server

The UAS application specific server provides the server side functionalities corresponding to the UAS applications (e.g. USS/UTM). The UAS application specific server utilizes the UAE server for the UAS application layer support functions. If CAPIF is supported, the UAS application specific server acts as CAPIF's API invoker as specified in 3GPP TS 23.222 [3].

NOTE: The details of the UAS application specific server is out of scope of the present document.

5.3.4 UAE client

The UAE client supports interactions with the UAS application specific client(s).

The UAE client provides the client side UAS application layer support functions as below:

- receiving and storing C2 operation mode configurations;
- selecting primary and secondary C2 communication modes based on the configurations;
- switching of C2 communication in emergency scenarios;
- supporting UAV application message communication handling;
- providing the UAE server with the Multi-USS capability;
- receiving and storing Multi-USS and DAA application policies;
- based on Multi-USS policies, switching of UAS application specific server in emergency scenarios.
- determining information of UAVs in proximity of the UAV and providing to the UAE server and/or UAS application specific client; and
- receiving information of UAVs in application defined proximity range/area of the host UAV from UAE server and providing to the UAS application specific client.

5.3.5 UAE server

If CAPIF is supported, the UAE server acts as CAPIF's API exposing function to provide service APIs to the UAS application specific server (e.g. USS/UTM) or another UAE server as specified in 3GPP TS 23.222 [3], or acts as CAPIF's API invoker to consume the service APIs provided by another UAE server.

The UAE server provides the server side UAS application layer support functions as below:

- performing group based QoS management for the UAS (i.e. pair of UAV and UAV-C) by using SEAL APIs.
- receiving C2 operation mode configuration from UAS application specific servers (e.g. USS/UTM) and further configuring the UAS UEs (i.e. UAV, UAV-C);
- triggering C2 communication mode switching with the UAS UEs;
- receiving and storing the selected C2 communication modes from the UAS UEs;
- monitoring the real-time status of UAS UEs by using SEAL APIs;
- supporting UAV application message communications between UAVs;
- receiving Multi-USS and DAA application policies from UAS application specific servers and further configuring the UAS UEs (i.e. UAV).
- determining location information of UAVs and providing to the UAE client and/or UAS application specific server; and
- providing information of UAVs in application defined proximity range/area of the host UAV to the UAE client and the UAS application specific server.

5.3.6 SEAL client

The following SEAL clients as specified in 3GPP TS 23.434 [5] are supported:

- Location management client;
- Group management client;
- Configuration management client;
- Identity management client;
- Key management client; and
- Network resource management client.

5.3.7 SEAL server

The following SEAL servers as specified in 3GPP TS 23.434 [5] are supported:

- Location management server;
- Group management server;
- Configuration management server;
- Identity management server;
- Key management server; and
- Network resource management server.

5.4 Reference points description

5.4.1 General

The reference points for the UAS application layer are described in the following clauses.

5.4.2 U1-AE

The interactions related to UAS application layer support functions between UAE client and UAE server are supported by U1-AE reference point.

5.4.3 U1-APP

The interactions related to UAS applications between UAS application specific client and UAS application specific server are supported by U1-APP reference point. The details of U1-APP reference point is out of scope of the present document.

5.4.4 U2-AE

The interactions related to UAS application layer support functions between the UAE clients are supported by U2-AE reference point.

5.4.5 U2-APP

The interactions related to UAS applications between UAS application specific clients are supported by U2-APP reference point. The details of U2-APP reference point is out of scope of the present document.

5.4.6 Us

The interactions related to UAS application layer support functions between the UAE server and the UAS application specific server are supported by Us reference point. If CAPIF is supported, this reference point is an instance of CAPIF-2/2e reference point as specified in 3GPP TS 23.222 [3].

5.4.7 Uc

The interactions related to UAS application layer support functions between the UAE client and the UAS application specific client are supported by Uc reference point.

5.4.8 SEAL-C

The following SEAL-C reference points specified in 3GPP TS 23.434 [5] are supported:

- LM-C reference point for location management;
- GM-C reference point for group management;
- CM-C reference point for configuration management;
- IM-C reference point for identity management;
- KM-C reference point for key management; and
- NRM-C reference point for network resource management.

5.4.9 SEAL-S

The following SEAL-S reference points specified in 3GPP TS 23.434 [5] are supported:

- LM-S reference point for location management;
- GM-S reference point for group management;
- CM-S reference point for configuration management;
- IM-S reference point for identity management;
- KM-S reference point for key management; and
- NRM-S reference point for network resource management.

5.4.10 SEAL-PC5

The following SEAL-PC5 reference points specified in 3GPP TS 23.434 [5] are supported:

- LM-PC5 reference point for location management;
- GM-PC5 reference point for group management;
- CM-PC5 reference point for configuration management;
- IM-PC5 reference point for identity management;
- KM-PC5 reference point for key management; and
- NRM-PC5 reference point for network resource management.

5.4.11 SEAL-UU

The following SEAL-UU reference points specified in 3GPP TS 23.434 [5] are supported:

- LM-UU reference point for location management;
- GM-UU reference point for group management;
- CM-UU reference point for configuration management;
- IM-UU reference point for identity management;
- KM-UU reference point for key management; and
- NRM-UU reference point for network resource management.

5.4.12 UAE-E

The interactions related to UAS application support functions between the UAE servers in a distributed deployment are supported by UAE-E reference point. If CAPIF is supported, this reference point is an instance of CAPIF-2/2e reference point as specified in 3GPP TS 23.222 [3].

5.5 External reference points

5.5.1 General

The reference points between the UAS application layer and the 3GPP network systems (EPS, 5GS) are described in the following clauses.

5.5.2 Rx

The reference point Rx supports the interactions between the UAS application server and the PCRF and is specified in 3GPP TS 29.214 [11]. The functions for Rx reference point are supported by the network resource management server of the SEAL.

5.5.3 MB2-C

The reference point MB2-C supports the control plane interactions between the UAS application server and the BM-SC and is specified in 3GPP TS 29.468 [12]. The functions for MB2-C reference point are supported by the network resource management server of the SEAL.

5.5.4 MB2-U

The reference point MB2-U supports the user plane interactions between the UAS application server and the BM-SC and is specified in 3GPP TS 29.468 [12]. The functions for MB2-U reference point are supported by the UAE server.

5.5.5 xMB-C

The reference point xMB-C supports the control plane interactions between the UAS application server and the BM-SC and is specified in 3GPP TS 26.346 [9]. The functions for xMB reference point are supported by the network resource management server of the SEAL.

5.5.6 xMB-U

The reference point xMB-U supports the user plane interactions between the UAS application server and the BM-SC and is specified in 3GPP TS 26.346 [9]. The functions for xMB-U reference point are supported by the UAE server.

5.5.7 T8

The reference point T8 supports the interactions between the UAS application server and the SCEF and is specified in 3GPP TS 23.682 [8]. The functions of T8 interface are supported by UAE server and the functions related to location management of T8 are supported by the location management server.

5.5.8 N5

The reference point N5 supports the interactions between the UAS application server and the PCF and is specified in 3GPP TS 23.501 [6]. The functions of N5 interface are supported by UAE server.

5.5.9 N33/Nnef

The reference point N33 supports the interactions between the UAS application server and the NEF and is specified in 3GPP TS 23.501 [6]. Nnef is the service based interface exposed by the NEF as per the N33 reference point. The functions of Nnef interface are supported by UAE server and the functions related to location management of Nnef are supported by the location management server.

6 Identities

6.1 General

This clause describes the identities associated with the entities in the UAS application layer and used in this specification.

6.2 UAV Identifier (UAV ID)

The UAV identifier is used to uniquely identify a UAV. The UAV ID is in the form of a 3GPP UE ID (e.g. GPSI, External Identifier) as specified in 3GPP TS 23.501 [6] or CAA level UAV ID as assigned by civil aviation authorities (e.g. FAA) via USS/UTM.

6.3 UAS Identifier (UAS ID)

The UAS identifier is used to uniquely identify a pair of UAV and UAV-C collectively known as UAS. The UAS ID is in the form of a Group ID as specified in 3GPP TS 23.434 [5] or a collection of individual identifiers of the entities in the UAS (e.g. CAA level UAV IDs, 3GPP UE IDs).

6.4 UAS Application Specific Server Identifier (UASS ID)

The UAS application specific server identifier is used to uniquely identify the UAS application specific server. The UASS ID is in the form of URI.

6.5 UAE Server Identifier (UAE Server ID)

The UAE server identifier is used to uniquely identify the UAE server. The UAE Server ID is in the form of URI.

7 Procedures and information flows

7.1 Usage of SEAL services

7.1.1 General

The UAE capabilities (UAE client and UAE server) utilize the SEAL services. Also the UAS application specific server(s) may directly utilize the SEAL services. All SEAL services specified in 3GPP TS 23.434 [5] are available to the UAS application layer (i.e. the UAE layer and the UAS application specific layer).

In this clause, the details of the information flows, procedures and APIs utilized by the UAS application layer are described.

7.1.2 Group management service

7.1.2.1 General

The UAE capabilities (UAE client and UAE server) utilize the group management service procedures (e.g. creation, join, leave) of SEAL based on the group configuration information (e.g. group join policy, group leader) provided by the UAS application specific layer. The decisions and corresponding triggers (e.g. group creation, join, leave) for group management are responsibility of the UAS application specific layer. The group management service of SEAL provides support for creating group for UAS for supporting UAS applications and C2 communications.

The UAS application specific server(s) may directly utilize the group management service procedures of SEAL.

7.1.2.2 Information flows

The following information flows of group management service of SEAL as specified in 3GPP TS 23.434 [5] are applicable for the UAS applications:

- Group creation request specified in clause 10.3.2.1;
- Group creation response specified in clause 10.3.2.2;
- Group creation notification specified in clause 10.3.2.3;
- Group information query request specified in clause 10.3.2.4;
- Group information query response specified in clause 10.3.2.5;
- Group membership update request specified in clause 10.3.2.6;
- Group membership update response specified in clause 10.3.2.7;
- Group membership notification specified in clause 10.3.2.8;
- Group deletion request specified in clause 10.3.2.9;
- Group deletion response specified in clause 10.3.2.10;
- Group deletion notification specified in clause 10.3.2.11;
- Group information request specified in clause 10.3.2.12;
- Group information response specified in clause 10.3.2.13;
- Group information subscribe request specified in clause 10.3.2.14;
- Group information subscribe response specified in clause 10.3.2.15;
- Group information notify request specified in clause 10.3.2.16;
- Group information notify response specified in clause 10.3.2.17;
- Store group configuration request specified in clause 10.3.2.18;
- Store group configuration response specified in clause 10.3.2.19;
- Get group configuration request specified in clause 10.3.2.20;
- Get group configuration response specified in clause 10.3.2.21;
- Subscribe group configuration request specified in clause 10.3.2.22;
- Subscribe group configuration response specified in clause 10.3.2.23;

- Notify group configuration request specified in clause 10.3.2.24;
- Notify group configuration response specified in clause 10.3.2.25;
- Configure VAL group request specified in clause 10.3.2.26;
- Configure VAL group response specified in clause 10.3.2.27;
- Group announcement specified in clause 10.3.2.28;
- Group registration request specified in clause 10.3.2.29;
- Group registration response specified in clause 10.3.2.30;
- Identity list notification specified in clause 10.3.2.31;
- Group de-registration request specified in clause 10.3.2.32; and
- Group de-registration response specified in clause 10.3.2.33.

The usage of the above information flows are clarified as below:

- The identity is the UE ID or CAA level UAV ID;
- The identity list or identities list is the list of UE IDs or CAA level UAV IDs; and
- The VAL server is the UAE server or the UAS application specific server.

7.1.2.3 Procedures

The following procedures of group management service of SEAL as specified in 3GPP TS 23.434 [5] are applicable for the UAS applications:

- Group creation specified in clause 10.3.3;
- Group information query specified in clause 10.3.4;
- Group membership specified in clause 10.3.5;
- Group configuration management specified in clause 10.3.6;
- Group announcement and join specified in clause 10.3.8;
- Group member leave specified in clause 10.3.9;

7.1.2.4 APIs

The following APIs of group management service of SEAL as specified in 3GPP TS 23.434 [5] are applicable for the UAS applications:

- SS_GroupManagement API specified in clause 10.4.2;

7.1.3 Location management service

7.1.3.1 General

The UAE capabilities (UAE client and UAE server) utilize location management (e.g. network location of UEs) service procedures of SEAL to support UAS applications.

The UAS application specific server(s) may directly utilize the location management service procedures of SEAL.

7.1.3.2 Information flows

The following information flows of location management service of SEAL as specified in 3GPP TS 23.434 [5] are applicable for the UAS applications:

- Location reporting configuration request specified in clause 9.3.2.0;
- Location reporting configuration response specified in clause 9.3.2.1;
- Location information report specified in clause 9.3.2.2;
- Location information request specified in clause 9.3.2.3;
- Location reporting trigger specified in clause 9.3.2.4;
- Location information subscription request specified in clause 9.3.2.5;
- Location information subscription response specified in clause 9.3.2.6;
- Location information notification specified in clause 9.3.2.7;
- Location reporting configuration cancel specified in clause 9.3.2.8;
- Get UE(s) information request specified in clause 9.3.2.9;
- Get UE(s) information response specified in clause 9.3.2.10;
- Monitor location subscription request specified in clause 9.3.2.11;
- Monitor location subscription response specified in clause 9.3.2.12; and
- Notify location monitoring event specified in clause 9.3.2.13.

The usage of the above information flows are clarified as below:

- The identity is the UE ID or CAA level UAV ID;
- The identity list or identities list is the list of UE IDs or CAA level UAV IDs; and
- The VAL server is the UAE server or the UAS application specific server.

7.1.3.3 Procedures

The following procedures of location management service of SEAL as specified in 3GPP TS 23.434 [5] are applicable for the UAS applications:

- Event-triggered location reporting procedure specified in clause 9.3.3;
- On-demand location reporting procedure specified in clause 9.3.4;
- Location reporting event triggers configuration cancel specified in clause 9.3.6;
- Location information subscription procedure specified in clause 9.3.7;
- Event-trigger location information notification procedure specified in clause 9.3.8;
- On-demand usage of location information procedure specified in clause 9.3.9;
- Obtaining UE(s) information at a location specified in clause 9.3.10;
- Monitoring Location Deviation specified in clause 9.3.11

7.1.3.4 APIs

The following APIs of location management service of SEAL as specified in 3GPP TS 23.434 [5] are applicable for the UAS applications:

- SS_LocationReporting API as specified in clause 9.4.2;
- SS_LocationInfoEvent API as specified in clause 9.4.3;
- SS_LocationInfoRetrieval API as specified in clause 9.4.4;
- SS_LocationAreaInfoRetrieval API as specified in clause 9.4.5;
- SS_LocationMonitoring API as specified in clause 9.4.6;

7.1.4 Network resource management service

7.1.4.1 General

The UAE capabilities (UAE client and UAE server) and UAS application specific servers utilize network resource management service procedures of SEAL to support UAS applications and C2 communications.

The UAS application specific server(s) may directly utilize the network management service procedures of SEAL.

7.1.4.2 Information flows

The following information flows of network resource management service of SEAL as specified in 3GPP TS 23.434 [5] are applicable for the UAS applications:

- Network resource adaptation request specified in clause 14.3.2.1;
- Network resource adaptation response specified in clause 14.3.2.2;
- Resource request specified in clause 14.3.2.6;
- Resource response specified in clause 14.3.2.7;
- Resource modification request specified in clause 14.3.2.8;
- Resource modification response specified in clause 14.3.2.9;
- Monitoring Events Subscription Request specified in clause 14.3.2.17;
- Monitoring Events Subscription Response specified in clause 14.3.2.18; and
- Monitoring Events Notification message specified in clause 14.3.2.19.

The usage of the information flows are clarified as below:

- The identity is the 3GPP UE ID or CAA level UAV ID;
- The identity list or identities list is the list of 3GPP UE IDs or CAA level UAV IDs; and
- The VAL server is the UAE server or the UAS application specific server.

7.1.4.3 Procedures

The following procedures of network resource management service of SEAL specified 3GPP TS 23.434 [5] are applicable for the UAS applications and C2 communications:

- Request for unicast resources at VAL service communication establishment specified in clause 14.3.3.2.1;
- Request for modification of unicast resources specified in clause 14.3.3.2.2;
- Network resource adaptation specified in clause 14.3.3.3.1;
- QoS/resource management capability initiation in network assisted UE-to-UE communications procedure specified in clause 14.3.5.2;

- Coordinated QoS provisioning operation in network assisted UE-to-UE communications procedure specified in clause 14.3.5.3;
- Monitoring Events Subscription procedure specified in clause 14.3.6.2;
- Monitoring Events Notification procedure specified in clause 14.3.6.3;

7.1.4.4 APIs

The following APIs of network resource management service of SEAL specified 3GPP TS 23.434 [5] are applicable for the UAS applications and C2 communications:

- SS_NetworkResourceAdaptation API specified in clause 14.4.2;
- SS_EventsMonitoring API specified in clause 14.4.3;

7.1.5 Network slice capability exposure service

7.1.5.1 General

The UAE capabilities (UAE client and UAE server) and UAS application specific servers utilize network slice capability exposure service procedures of SEAL to support UAS applications and C2 communications.

The UAS application specific server(s) may directly utilize the network slice capability exposure service procedures of SEAL.

Specific QoS per planned flight path/waypoint may be requested using network slice optimization described in 3GPP TS 23.435 [14].

7.1.5.2 Information flows

The following information flows of network slice capability exposure service of SEAL as specified in 3GPP TS 23.435 [14] are applicable for the UAS applications:

- VAL server policy provisioning request specified in clause 9.5.3.2;
- VAL server policy provisioning response specified in clause 9.5.3.3;
- VAL server policy update request specified in clause 9.5.3.4;
- VAL server policy update response specified in clause 9.5.3.5;
- VAL server policy delete request specified in clause 9.5.3.6;
- VAL server policy delete response specified in clause 9.5.3.7;
- VAL server policy usage reporting data subscribe request specified in clause 9.5.3.8;
- VAL server policy usage reporting data subscribe response specified in clause 9.5.3.9;
- VAL server policy usage reporting data notification specified in clause 9.5.3.10;
- Network slice optimization subscription request specified in clause 9.5.3.11;
- Network slice optimization subscription response specified in clause 9.5.3.12;
- Network slice optimization notification specified in clause 9.5.3.13;
- Network slice optimization report retrieval request specified in clause 9.5.3.14;
- Network slice optimization report retrieval response in clause 9.5.3.15; and
- Policy harmonization subscribe notify specified in clause 9.5.3.16.

The usage of the information flows are clarified as below:

- The identity is the 3GPP UE ID or CAA level UAV ID;
- The identity list or identities list is the list of 3GPP UE IDs or CAA level UAV IDs;
- The VAL server is the UAE server or the UAS application specific server or UAS UE;
- The area of interest comprises geographical information in form of waypoint(s);
- The trigger event comprises time information about the route or time point specifying when the UAV reaches the respective waypoint and the corresponding QoS requirement of each waypoint; and
- The priority comprises priority information about a route/waypoint(s).

7.1.5.3 Procedures

The following procedures of network slice capability exposure service of SEAL specified 3GPP TS 23.435 [14] are applicable for the UAS applications and C2 communications:

- VAL server policy provisioning procedure specified in clause 9.5.2.1.1;
- VAL server policy update procedure specified in clause 9.5.2.1.2;
- VAL server policy delete procedure specified in clause 9.5.2.1.3;
- Policy harmonization procedure specified in clause 9.5.2.1.4;
- VAL server policy usage reporting data procedure specified in clause 9.5.2.1.5;
- Network slice optimization based on VAL server policy procedure specified in clause 9.5.2.2;
- Network slice optimization report retrieval procedure specified in clause 9.5.2.3;

7.1.5.4 APIs

The following APIs of network slice capability exposure service of SEAL specified 3GPP TS 23.435 [14] are applicable for the UAS applications and C2 communications:

- SS_NSCE_PolicyManagement API specified in clause 9.5.4.1;
- SS_NSCE_NSOptimization API specified in clause 9.5.4.1;
- SS_NSCE_Policy_harmonization API specified in clause 9.5.4.1.

7.1a UAE layer registration

7.1a.1 General

The UAE capabilities provide support for registering UAV/UAV-C at the UAE server. The UAE server uses the registration information to distribute UAE layer messages or UAS application specific layer messages to the appropriate UAS UEs, and to distinguish what capabilities that can be provided to different UAE clients.

7.1a.2 Procedures

7.1a.2.1 UAS UE registration

7.1a.2.1.1 General

This clause describes the procedure for UAS UE (UAV/UAV-C) to register with the UAE server.

7.1a.2.1.2 Procedure

Pre-conditions:

- The UAE client has discovered the UAE server and is aware of the address of the UAE server (e.g. FDQN).

NOTE: How the UAE client is provisioned with the UAE server information is outside the scope of the current document.

- The UAV/UAV-C has already been assigned with the UAV ID.

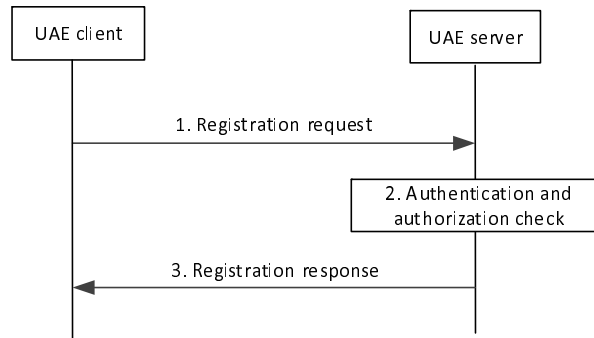


Figure 7.1a.2.1.1-1: Procedure for registering the UAE client at the UAE server

1. The UAE client sends a registration request to the UAE server.
2. The UAE server performs authentication and authorization check (e.g. based on pre-provisioned security information or by interacting with UAS application specific server (e.g. USS/UTM)).
3. The UAE server sends a registration response to the UAE client indicating success or failure of the registration.

7.1a.2.2 UAS UE deregistration

7.1a.2.2.1 General

This clause describes the procedures for UAS UE (UAV/UAV-C) to deregister at the UAE server.

7.1a.2.2.2 Procedure

Pre-condition:

- The UAE client has already registered with the UAE server as described in clause 7.1a.2.1.

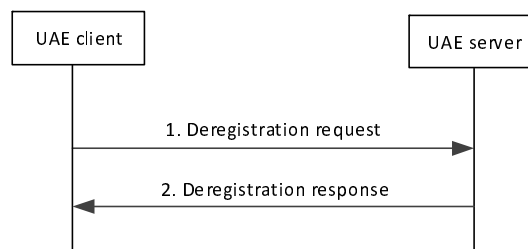


Figure 7.1a.2.2.2-1: Procedure for deregistering the UAE client at the UAE server

1. The UAE client sends a deregistration request to the UAE server.
2. The UAE server sends a deregistration response to the UAE client.

7.1a.2.3 UAS UE registration update

7.1a.2.3.1 General

This clause describes the procedures for UAS UE (UAV/UAV-C) to update its registration with the UAE server.

7.1a.2.3.2 Procedure

Pre-conditions:

- The UAE client has already registered with the UAE server as described in clause 7.1a.2.1.

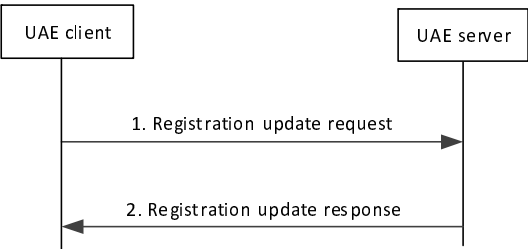


Figure 7.1a.2.3.1-1: Procedure for registration update by the UAE client at the UAE server

1. The UAE client sends a registration update request to the UAE server.
2. The UAE server sends an acknowledgement to the UAE client.

7.1a.3 Information flows

7.1a.3.1 Registration request

Table 7.1a.3.1-1 describes the information flow for a UAE client to register with the UAE server.

Table 7.1a.3.1-1: Registration request

Information element	Status	Description
UAV ID	M	The identifier of the UAV/UAV-C/LDGS (e.g., 3GPP UE ID or CAA level UAV ID) which initiates the registration request.
UAS UE information	O	UAS UE information like IP address, Multi-USS capability, DAA assist capability, Dual Network-Assisted C2 communication link capability, real time flight path monitoring assistance capability, LDGS capability, NTZ indication capability, etc.
Proposed registration lifetime (NOTE)	O	Proposed registration lifetime.
NOTE: If Proposed registration lifetime IE is not included, then the registration lifetime is valid until explicit deregistration is performed.		

7.1a.3.2 Registration response

Table 7.1a.3.2-1 describes the information flow for UAE server to respond for registration request from the UAE client.

Table 7.1a.3.2-1: Registration response

Information element	Status	Description
Result	M	Result from the UAE server in response to registration request indicating success or failure
Registration lifetime	O	The registration lifetime provided by UAE server if registration is successful

7.1a.3.3 Deregistration request

Table 7.1a.3.3-1 describes the information flow for a UAE client to deregister at the UAE server.

Table 7.1a.3.3-1: Deregistration request

Information element	Status	Description
UAV ID	M	The identifier of the UAV/UAV-C (e.g. 3GPP UE ID or CAA level UAV ID) which initiates the deregistration request

7.1a.3.4 Deregistration response

Table 7.1a.3.4-1 describes the information flow for UAE server to respond for deregistration request from the UAE client.

Table 7.1a.3.4-1: Deregistration response

Information element	Status	Description
Result	M	Result from the UAE server in response to the deregistration request

7.1a.3.5 Registration update request

Table 7.1a.3.5-1 describes the information flow for a UAE client to update registration with the UAE server.

Table 7.1a.3.5-1: Registration update request

Information element	Status	Description
UAV ID	M	The identifier of the UAV/UAV-C/LDGS (e.g., 3GPP UE ID or CAA level UAV ID) which initiates the registration request
UAS UE information	M	UAS UE information like IP address, Multi-USS capability, DAA assist capability, Dual Network-Assisted C2 communication link capability, real time flight path monitoring assistance capability, LDGS capability, NTZ indication capability, etc.
Proposed registration lifetime	O	Proposed registration lifetime.

7.1a.3.6 Registration update response

Table 7.1a.3.6-1 describes the information flow for UAE server to respond for registration update request from the UAE client.

Table 7.1a.3.6-1: Registration update response

Information element	Status	Description
Result	M	Result from the UAE server in response to registration update request indicating success or failure
Registration lifetime	O	The registration lifetime provided by UAE server if registration update is successful

7.2 Communications between UAVs within a geographical area

7.2.1 General

This clause describes the procedure for communications between UAVs within a geographical area. The geographical area is from the perspective of the UAV initiating the communication with other UAVs.

The following transport mechanisms can be supported for communications between UAVs within a geographical area:

- a. Using unicast Uu.

NOTE: The mechanisms for communications between UAVs using multicast/broadcast Uu and ProSe are out of scope of the current release of the present document.

7.2.2 Procedures

7.2.2.1 Communications between UAVs within a geographical area using unicast Uu

Figure 7.2.2.1-1 illustrates the procedure for communications between UAVs within a geographical area using unicast Uu.

Pre-conditions:

1. The UAE clients of UAVs have successfully registered and connected to the UAE server.
2. The SEAL's LM server information is configured at the UAE server.

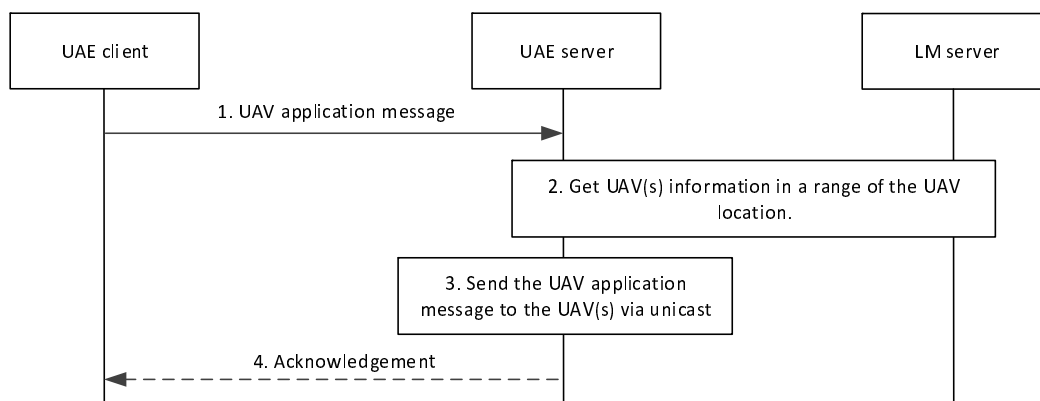


Figure 7.2.2.1-1: Communications between UAVs within a geographical area using unicast Uu

1. The UAE client of UAV sends a UAV application message to the UAE server in order to communicate the payload information of the UAV application message to other UAVs in a range of the location corresponding to the UAV.
2. The UAE server obtains the other UAV(s) information in the location of the UAV from the LMS as specified in 3GPP TS 23.434 [5].
3. Upon receiving the list of other UAV(s), the UAE server sends the payload in UAV application message to each of the UAV via unicast channel.
4. Upon completing step 3, the UAE server may send an acknowledgement to the UAE client.

7.2.3 Information flows

7.2.3.1 UAV application message

Table 7.2.3.1-1 describes the information flow for the UAV application message from UAE client to UAE server and from UAE server to UAE client.

Table 7.2.3.1-1: UAV application message

Information element	Status	Description
UAV ID	M	The identifier of the UAV (e.g. 3GPP UE ID or CAA level UAV ID) which initiates the UAV application message.
Application defined proximity range information (NOTE 2)	M	Description of the range information over which the UAV application message is to be sent.
Application Payload (NOTE 1)	M	Application payload that is to be delivered to the other UAVs
NOTE 1: This IE is provided by the UAS application specific client and its details are out of scope of 3GPP.		
NOTE 2: This IE is not included when the UAV application message is sent from UAE server to UAE client.		

7.3 UAV and UAV-C Pairing and C2 QoS Provisioning using Group ID

7.3.1 General

This clause describes the procedure for UAV and UAV-C grouping C2 QoS provisioning using subsequent group ID. It also provides the procedure for UAV replacement resulting in group ID update.


7.3.2 Procedures

7.3.2.1 Procedure for group creation for one pair of UAV and UAV-C

Figure 7.3.2.1-1 illustrates a high-level procedure for group creation.

Pre-conditions:

- Both UAV-C and UAV have successfully registered and connected to the UAE server.
- A CAA level UAV ID is already assigned to the UAV-C and UAV.

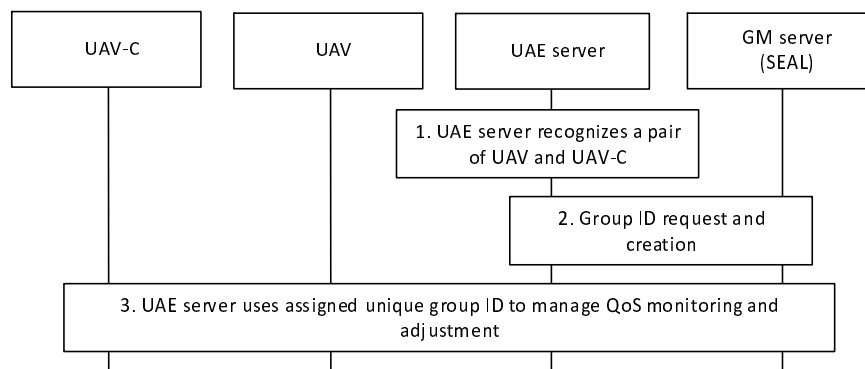**Figure 7.3.2.1-1: Procedure for group creation for one pair of UAV and UAV-C**

1. The UAE server recognizes a unique pair of UAV and UAV-C either by 3GPP UE ID or CAA level UAV ID.

NOTE: The mechanisms for how the UAE server recognizes a pair of UAV-C and UAV is out of scope of the present document.

2. The UAE server sends a group creation request to the SEAL GM server, if there is no pre-assigned group ID, by using the GM-S reference link as specified in 3GPP TS 23.434 [5] using the procedure defined in clause 10.3. The SEAL GM server creates one group ID for one pair of UAV and UAV-C as specified in 3GPP TS 23.434 [5].

3. The UAE server uses the returned group ID for UAS for QoS management.

7.3.2.2 Procedure for group-based approach for C2 QoS provisioning

Figure 7.3.2.2-1 illustrates a high-level workflow of group-based C2 QoS provisioning.

Pre-conditions:

- Both UAV and UAV-C have registered to 3GPP 5G network respectively. C2 communication is established.
- The procedure specified in clause 7.3.2.1 is performed and the group ID for the UAS group is available at the UAE server.

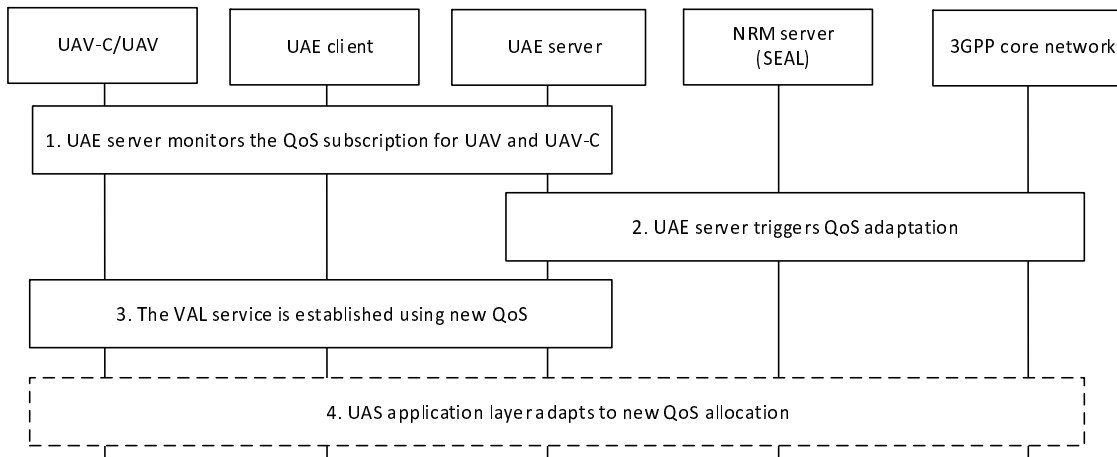


Figure 7.3.2.2-1: Procedure of group-based approach for C2 QoS provisioning.

1. The UAE server monitors the QoS for the UAS group (which includes a UAV and UAV-C) by SEAL NRM as specified in 3GPP TS 23.434 [5].
2. In cases where the network condition for C2 communication does not satisfy the pre-defined QoS requirement, the UAE server may choose to send QoS adaptation request to the SEAL NRM server using the NRM-S reference point as specified in 3GPP TS 23.434 [5]. The QoS adaptation request needs to be sent per group ID for a pair of UAV and UAV-C created in the procedure specified in clause 7.3.2.1. The subsequent network resource adaptation procedure is triggered by the UAE server as specified in clause 14.3.3.3.1 of 3GPP TS 23.434 [5].
3. The UAE client and UAE server established communication based on new QoS requirements as specified in clause 14.3.3.2.1.2 of 3GPP TS 23.434 [5].
4. UAS application layer adapts the updated QoS assignment.

NOTE: The mechanisms for how the UAS application layer is adapting newly assigned QoS is out of scope of the present document.

7.3.2.3 Procedure for group update

Figure 7.3.2.3-1 illustrates the group membership update when UAV-2 is used to replace UAV-1.

Pre-conditions:

- The UAV-C, UAV-1, and UAV-2 are all previously successfully subscribed with 3GPP Core Network and UAS application specific server (e.g. USS/UTM) and have received a 3GPP UE ID (e.g. GPSI) and a CAA level UAV ID.
- The UAV-1 and UAV-C have been grouped by a group ID by SEAL GMS as specified in clause 7.3.2.1.

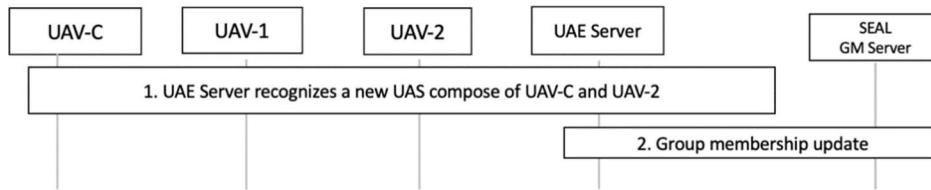


Figure 7.3.2.3-1: Procedure for group update

1. The UAE server recognizes a new pair of UAV-2 and UAV-C by the new CAA level UAV ID.

NOTE: The mechanisms for how the UAE server recognizes a new pair of UAV-C and UAV is out of scope of the present document.

2. The UAE server sends a group membership update request to the SEAL GM server using the procedure specified in clause 10.3.2.6 of 3GPP TS 23.434 [5]. The SEAL GM server sends a group membership update response as specified in clause 10.3.2.7 of 3GPP TS 23.434 [5].

7.3.3 Information flows

The usage of information flows between UAE server and SEAL's Group management Server is specified in clause 7.1.2.2.

The usage of information flows between UAE server and SEAL's Network Resource Management Server is specified in clause 7.1.4.2.

7.4 C2 Communication mode selection and switching

7.4.1 General

This feature introduces the UAS application enablement services for supporting the selection and re-selection of C2 communication modes. In particular, the UAE layer provides support for the following operations:

- Support the switch between two Network-Assisted C2 communications (via different subscriptions/networks) or between a Network-Assisted C2 communication and a Direct C2 communication (e.g. when the direct link becomes feasible/available, or when a UAV is moving towards BVLOS or has poor direct link conditions, etc.) as described in clause 7.4.2.4. For redundancy purposes, two links can be activated to work simultaneously or as active/standby.
- Support the switch between the Network-Assisted/Direct C2 communication and UTM-Navigated C2 communication (e.g. for air traffic control, the UAV is approaching a No Drone Zone, and detected potential security threats, etc.) as described in clause 7.4.2.5.
- Support the selection of the communication mode between: more than one C2 communication links, and among applicable C2 communication links, selecting a mode as the primary one as described in clause 7.4.2.3. If two links are activated to work simultaneously or as active/standby, these links can belong to the same or different networks (dual subscription functionality).
- Activation for the support of the above operations in the UAE Server and in the UAE client performed using procedures described respectively in clause 7.4.2.1 and clause 7.4.2.2.
- Support for C2 direct mode availability reporting to provide the awareness to the UAE server to switch to direct C2 communication if it is possible, as described in clause 7.4.2.4.

Below, the different procedures for C2 communication mode selection and switching are described using UAE Client assisted and UAE Server controlled based mechanisms. Such functionality is supported by means of policies delivered to the UAV/UAV-C via the UAE layer and assisting the dynamic switching of C2 modes.

7.4.2 Procedures

7.4.2.1 Management of C2 mode selection / switching capability

This procedure manages the C2 mode selection/switching capability at the UAE server, based on an application request from UAS application specific server (which can be the USS/UTM) to manage the C2 operation modes (direct, network-assisted, UTM-Navigated) of C2 communication for a UAS.

Figure 7.4.2.1-1 illustrates the procedure where the UAE server receives an application request for managing the operation mode for C2 communications for a UAS.

Pre-condition:

- The UAV has received its UAS ID from the UAS application specific server.

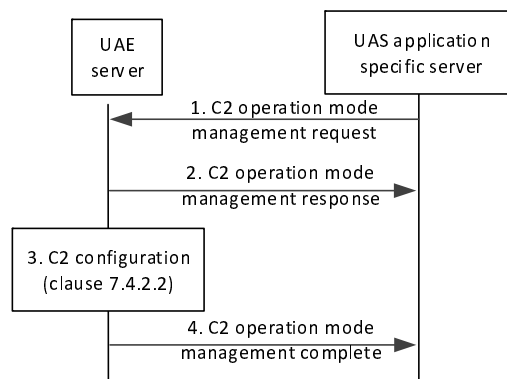


Figure 7.4.2.1-1: C2 operation mode management request / response

1. The UAS application specific server sends to the UAE Server a C2 operation mode management request for managing the operation modes for the C2 communication for a UAS (consisting a UAV and a UAV-C) and to subscribe for UAE notifications. If the C2 operation mode management container is provided, the request shall include the allowed C2 communication modes, the primary C2 communication mode and the policy for C2 switching, and may include the secondary C2 communication mode and the C2 service area. If ProSe/PC5 is supported for direct C2 communications, such request may also include a C2 direct mode availability reporting requirement including the ProSe configuration information for direct C2 operation, the UAV and UAV-C IDs and addresses, and the time for which the monitoring of availability will apply. If Dual Network-Assisted C2 communication link is supported (dual subscription functionality), such request may also include a C2 active/standby configuration information for C2 connectivity of the UAV to select the specific network based on QoS or specific time and also the area for which the respective network connectivity should be valid. Such request may also include a C2 connectivity via both active links via different networks. If Dual UTM-Navigated C2 communications is supported (dual subscription functionality), such request may also include a C2 active/standby configuration information for C2 connectivity of the UAV to select the specific network based on QoS or specific time and also the area for which the respective network connectivity should be valid. Such request may also include a C2 connectivity via both active links via different networks.
2. The UAE Server sends to the UAS application specific server a C2 operation mode management response with a positive or negative acknowledgement of the request, based on capability of UAE server to undertake this task.
3. UAE server executes C2 communication modes configuration according to clause 7.4.2.2.
4. After execution of C2 communication modes configuration, the UAE server notifies the UAS application specific server with a C2 operation mode management complete.

7.4.2.2 C2 communication modes configuration

This procedure enables the configuration of the UAE Client, based on an application request from UAS application specific server (which can be the USS/UTM) to manage the C2 operation modes (direct, network-assisted, UTM-Navigated) of C2 communication for a UAS. For redundancy purposes, two links can be activated to work

simultaneously or as active/standby. These links can belong to the same or different networks (e.g., dual subscription functionality) see Figure B.2.1-3.

Figure 7.4.2.2-1 illustrates the C2 communication modes configuration procedure.

Pre-conditions:

1. The UAS UEs are connected to 5GS and authenticated and authorized by UAS application specific server as specified in clause 5.2 of 3GPP TS 23.256 [4].
2. UAE Server has established a UAE session with the respective UAE Clients as the UAE clients are successfully registered to the UAE server.
3. UAE Server has performed the C2 mode selection/switching capability initiation as in clause 7.4.2.1.

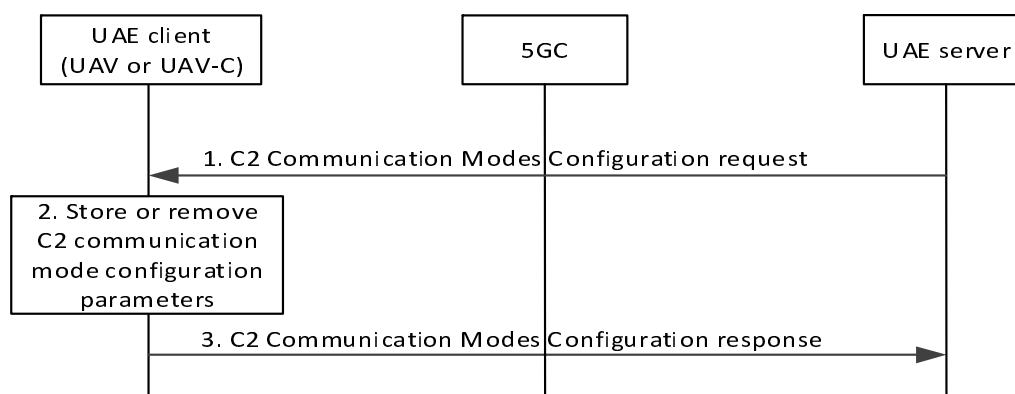


Figure 7.4.2.2-1: C2 communication modes configuration

1. The UAE Server sends a C2 communication modes configuration request including the UAS identifier. If the C2 operation mode management container is provided, the request shall include the allowed C2 communication modes (e.g., direct, network assisted, UTM-Navigated), the primary C2 communication mode and the policy for C2 switching, and may include the secondary C2 communication mode. The UAE server may configure multiple Network-Assisted C2 communication links if the UAE client has indicated this capability to the UAE server at the UAE layer registration and if the UAE server has received such configuration via procedure described in clause 7.4.2.1. The UAE server may configure multiple UTM-Navigated C2 communication links if the UAE client has indicated this capability to the UAE server at the UAE layer registration and if the UAE server has received such configuration via procedure described in clause 7.4.2.1. In the case of removal of C2 communication mode configuration parameters from the UAV or UAV-C, then the request shall only include the UAS identifier.
2. The UAE Client stores or removes the C2 communication mode configuration parameters as per the information received in step 1.
3. The UAE Client sends a C2 communication modes configuration response to the UAE Server.

7.4.2.3 C2 communication mode selection by UAE Client

This procedure provides a mechanism for the UAE client to select a primary C2 communication mode and optional secondary C2 communication mode based on C2 communication mode configuration enabled as described in clause 7.4.2.2. If two links are activated to work simultaneously or as active/standby, these links can belong to the same or different networks (dual subscription functionality). The UAE server can then have access to both networks (using deployment option shown in figure B.2.1-3 (deployment of UAE server with connections to 3GPP network systems in multiple PLMN operator (network) domains)).

Figure 7.4.2.3-1 illustrates the C2 communication mode selection and redundant C2 link negotiation.

Pre-conditions:

1. The UAE Clients are configured with a C2 communication modes configuration as described in clause 7.4.2.2.
2. UAE Server has activated the dynamic C2 mode switching capability, as described in clause 7.4.2.1.

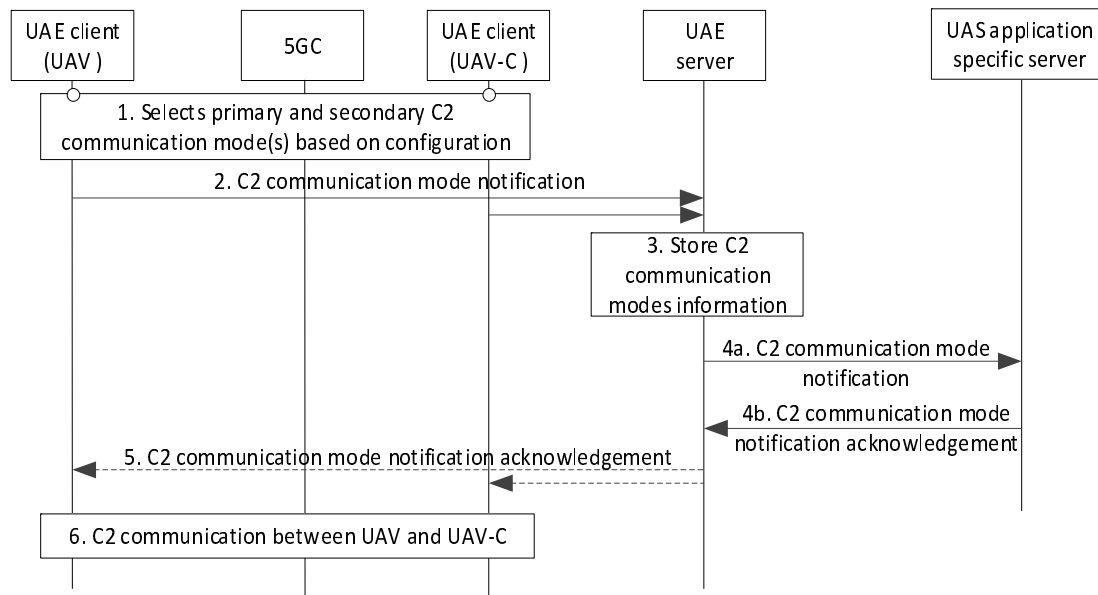


Figure 7.4.2.3-1: C2 communication mode selection

1. UAE Clients (UAV and UAV-C) select a primary and optionally a secondary C2 communication mode based on C2 communication mode configuration. The UAE Client (UAV) may select active connectivity via network 1 or network 2 based on the preconfigured policy for C2 and payload communication. The two links may have been activated to work simultaneously based on specific QoS threshold. The UAE Client (UAV) may also select active/standby connectivity via network 1 or network 2 based on the preconfigured policy for C2 and payload communication or activate both links via both networks simultaneously. The two links can belong to the same or different networks (e.g., dual subscription functionality).
2. The UAE Client sends a C2 communication mode notification to the UAE Server indicating the selected primary and secondary C2 communication modes or the selected active/standby communication modes and the associated C2 link information which may include UAE Client and peer address information (e.g., IP/MAC address).
3. The UAE Server stores the C2 communication modes and links information.
- 4a-4b. The UAE Server forwards the C2 communication mode and links information to the UAS application specific server and receives a C2 communication mode notification acknowledgement from the UAS application specific server.
5. The UAE Server may forward the C2 communication mode notification acknowledgement to the UAE Client.
6. The UAV and UAV-C start C2 communication using the selected C2 communication mode.

NOTE: The details of step 6 are outside the scope of the present specification.

7.4.2.4 UAE-layer assisted dynamic C2 mode switching

This procedure provides a mechanism for supporting dynamic switching between two Network-Assisted C2 communications (via different networks) or two UTM-Navigated C2 communications (via different networks) or between a direct and a network assisted C2 communication or between a direct/network-assisted and UTM-Navigated, which may be required while the UAV flight is ongoing, due to possible change of network conditions, expected location/mobility of the UAV, unpredictable events etc. If two links are activated to work simultaneously or as active/standby, these links can belong to the same or different networks (dual subscription functionality).

Figure 7.4.2.4-1 illustrates the procedure where the UAE server supports the dynamic C2 mode switching for network-assisted C2 communications.

Pre-conditions:

1. UAE Server has activated the dynamic C2 mode switching capability, as described in clause 7.4.2.1

2. UAE Server has subscribed for using SEAL/LMS services and has configured the location event reporting, based on 3GPP TS 23.434 [5]. If two links are configured to work simultaneously or as active/standby, SEAL/LMS must have access to both networks (using deployment option shown in Figure 8.2.2-2 of 3GPP TS 23.434 [5] - deployment of SEAL servers with connections to 3GPP network system in multiple PLMN operators (networks) domains).
3. UAE Client has selected a C2 communication mode as described in clause 7.4.2.3, and UAV and UAV-C are engaged in C2 communication. Two links may have been activated to work simultaneously or as active/standby.

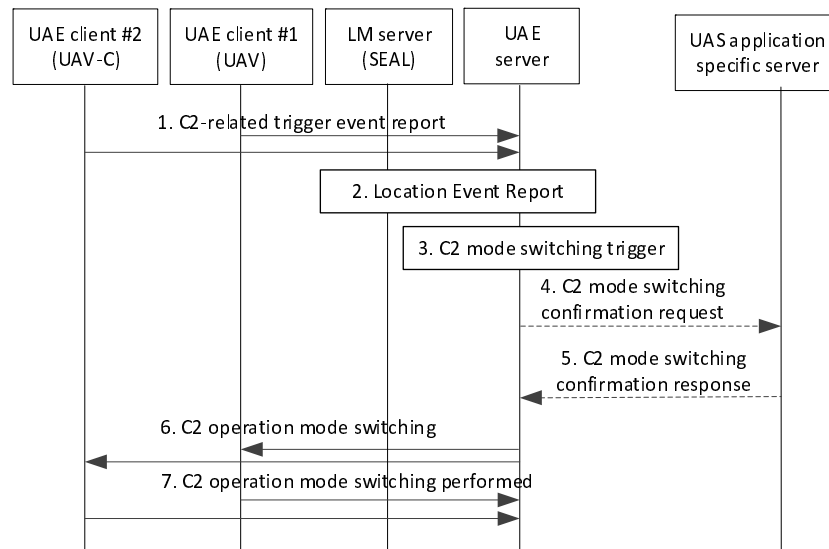


Figure 7.4.2.4-1: UAE-assisted dynamic C2 mode switching

1. The UAE Client detects a condition for switching C2 communication mode based on local conditions (e.g. using the C2 communication mode switching policy) or based on a command from the UAS application specific server (as described in clause 7.4.2.5). A C2-related trigger event report is sent from the UAE Client of the UAV and/or the UAV-C to the UAE Server. The report shall include a command from the UAS application specific server or an application QoS attribute change (experienced or expected) e.g. based on the experienced packet delay or packet loss for the Uu links or the direct link (e.g. packet loss greater than a pre-defined threshold).

If a C2 direct mode availability reporting requirement exists based on clause 7.4.2.1 step 1, the detection of UAV/UAV-C(s) can be based on the PC5 discovery due to the configurations received due procedures in clause 7.4.2.1 and clause 7.4.2.2. In this case, the C2-related trigger event report message shall include also a C2 direct mode availability report including PC5 related configuration information.

2. Additionally, the UAE Server receives a location report for the UAV/UAV-C by the SEAL's LM server. The report can be either periodical or event-based (e.g. UAV moving towards an area covered by a different cell or different operator), as specified in 3GPP TS 23.434 [5] SEAL's LM server procedures (UAE Server acting as a VAL server).
3. The UAE Server determines the switching of the C2 mode from direct to network assisted or vice versa or to UTM-Navigated. If the switching is from direct to network assisted or vice versa, this is done by calculating the relative actual or expected UAV-to-UAV-C location, as well as other factors like QoS fulfilment/unfulfillment, augmented location, mobility/speed, direction, topography, weather conditions. In case of simultaneous links, UAE Server determines the switching of the C2 mode between two network assisted C2 communications or between two UTM-Navigated C2 communications.
4. The UAE Server sends a C2 mode switching confirmation request to the UAS application specific server, which includes the UAS identifier as well as the cause for switching and the switching option (between two network assisted, between two UTM-Navigated, direct to network-assisted, network-assisted to direct or to UTM-Navigated). The UAE Server sends this request to obtain confirmation from the UAS application specific server before proceeding with switching to UTM-Navigated. This step is optional in the case of switching from direct to network assisted or vice versa.
5. Conditional on Step 3, the UAE Server receives from the UAS application specific server a C2 mode switching confirmation response indicating a positive or negative result for the requested change.

6. The UAE Server sends to the involved UAE Clients, a C2 operation mode switching message which provides an instruction to the UAV and UAV-C to switch between the networks, to network-assisted mode or to direct mode or to UTM-Navigated mode. The UAV and UAV-C start C2 communication using the indicated C2 communication mode (e.g., active link via network 1 or network 2, direct, network assisted, UTM-Navigated).
7. If an emergency switch of the C2 communication is deemed necessary by the UAE Client (e.g. sudden loss of the active C2 link), the UAE Client changes the link prior to the steps 1-6, which are skipped. The UAE Clients send a C2 operation mode switching performed message to the UAE Server to confirm the switching of the C2 communication mode.

7.4.2.5 UAS application specific server triggered C2 communication mode switching

This procedure provides a mechanism for supporting dynamic switching between direct or network assisted C2 communications to UTM-Navigated, initiated by the UAS application specific server (which can be the USS/UTM) after detecting a C2 switching condition which may be required while the UAV enters a no-fly zone. For example, the UAS application specific server needs to take over the control of UAV and fly it to safety (see 3GPP TS 22.125 [2] clause 4.2).

Figure 7.4.2.5-1 illustrates a UAS application specific server triggered C2 communication mode switching.

Pre-conditions:

1. UAE Server has activated the dynamic C2 mode switching capability, as described in clause 7.4.2.1. If two links can be activated to work simultaneously or as active/standby, these links can belong to the same or different networks.
2. UAE Client has selected a primary C2 communication mode as described in clause 7.4.2.3, and UAV and UAV-C are engaged in (e.g., direct or network assisted) C2 communication. Two links may have been activated to work simultaneously.

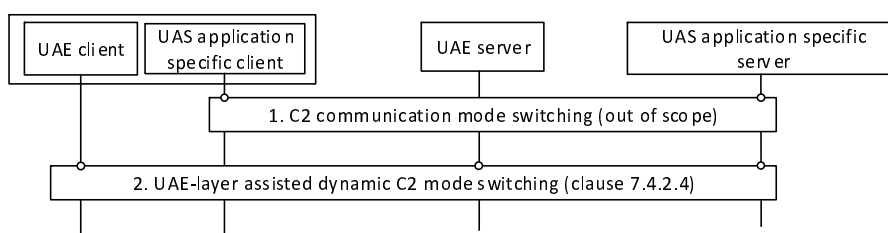


Figure 7.4.2.5-1: UAS application specific server triggered C2 communication mode switching

1. The UAS application specific client is instructed directly by a command from the UAS application specific server to switch to UTM-Navigated mode.

NOTE: This procedure between the UAS application specific server and the UAS application specific client is out of scope of the present document.

2. The UAE Client initiates the procedure described in clause 7.4.2.4.

7.4.3 Information flows

7.4.3.1 C2 operation mode management request

Table 7.4.3.1-1 describes the information flow C2 operation mode management request from the UAS application specific server to the UAE server.

Table 7.4.3.1-1: C2 operation mode management request

Information element	Status	Description
UASS ID	M	Identity of the UAS application specific server which requests the C2 operation mode management. This ID can be the USS/UTM identifier, when the UAS application specific server is the USS/UTM.
UAS ID	M	The identification of the UAS for which the C2 QoS management request applies. This could be in form of identifier for the UAS, e.g group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI
C2 operation mode management container (see NOTE 2)	O	The C2 operation mode management container consists of the requirements and policy for C2 operation mode management
> C2 operation mode management requirement	M	Identification of the type of the C2 mode switching to be supported by the UAE server. This can be either from direct to network-assisted C2, or from network-assisted to direct C2 or to UTM-Navigated.
> Allowed C2 communication modes	M	direct, network assisted, UTM-Navigated
> Primary C2 communication mode	M	Primary C2 communication mode (direct, network assisted)
> Secondary C2 communication mode	O	Secondary C2 communication mode (direct, network assisted)
> Policy of C2 switching	M	Parameters for C2 switching - QoS thresholds on active link - QoS thresholds on target link
> C2 service area	O	The area where the C2 operation mode management request applies. This can be geographical area, or topological area in which the capability is active.
> C2 direct mode availability reporting requirement	O	A requirement for C2 direct mode reporting.
>> ProSe application codes	O	The ProSe codes used for direct C2 communications. The ProSe codes are used for the ProSe Direct Discovery as specified in 3GPP TS 23.256 [4].
>>Time of validity	O	The time for which the C2 direct mode availability/feasibility checking applies.
>>Reporting configuration	O	The configuration of the reporting and periodicity/frequency of reporting required.
> Dual Network-Assisted C2 communication links	O	Support for multiple Network-Assisted C2 communication links.
>> Policy of C2 switching in case of Network-Assisted C2 communication link 1	O	Parameters for C2 switching for Network-Assisted C2 communication link 1: - QoS threshold needed for C2 communication per subscription/network, QoS threshold needed for payload (user plane) communication per subscription/network.
>> Policy of C2 switching in case of Network-Assisted C2 communication link 2	O	Parameters for C2 switching for Network-Assisted C2 communication link 2: - QoS threshold needed for C2 communication per subscription to activate simultaneously both subscriptions/networks, QoS threshold needed for payload (user plane) communication per subscription to activate simultaneously both subscriptions/networks,
>> C2 service area for Network-Assisted C2 communication link 1	O	The area where the C2 operation mode management request applies. This can be geographical area, or topological area in which the connectivity via subscription/network 1 is active.
>> C2 service area for Network-Assisted C2 communication link 2	O	The area where the C2 operation mode management request applies. This can be geographical area, or topological area in which the connectivity via subscription/network 2 is active.

> Dual UTM-Navigated C2 communication links	O	Support for multiple UTM-Navigated C2 communication links.
>> Policy of C2 switching in case of UTM-Navigated C2 communication link 1	O	Parameters for C2 switching for UTM-Navigated C2 communication link 1: - QoS threshold needed for C2 communication per subscription/network, QoS threshold needed for payload (user plane) communication per subscription/network.
>> Policy of C2 switching in case of UTM-Navigated C2 communication link 2	O	Parameters for C2 switching for UTM-Navigated C2 communication link 2: - QoS threshold needed for C2 communication per subscription to activate simultaneously both subscriptions/networks, QoS threshold needed for payload (user plane) communication per subscription to activate simultaneously both subscriptions/networks,
>> C2 service area for UTM-Navigated C2 communication link 1	O	The area where the C2 operation mode management request applies. This can be geographical area, or topological area in which the connectivity via subscription/network 1 is active.
>> C2 service area for UTM-Navigated C2 communication link 2	O	The area where the C2 operation mode management request applies. This can be geographical area, or topological area in which the connectivity via subscription/network 2 is active.
NOTE 1: Void NOTE 2: If C2 operation mode management container IE is not included, it indicates removal of the C2 operation mode management related information.		

7.4.3.2 C2 operation mode management response

Table 7.4.3.2-1 describes the information flow C2 operation mode management response from the UAE server to the UAS application specific server.

Table 7.4.3.2-1: C2 operation mode management response

Information element	Status	Description
Result	M	The positive or negative result of the C2 operation mode management request.

7.4.3.3 C2 operation mode management complete

Table 7.4.3.3-1 describes the information flow C2 operation mode management complete from the UAE server to the UAS application specific server.

Table 7.4.3.3-1: C2 operation mode management complete

Information element	Status	Description
Result	M	The positive or negative result of the C2 communication mode configuration.

7.4.3.4 C2-related trigger event report

Table 7.4.3.4-1 describes the information flow C2-related trigger event report from the UAE client (of the UAV or the UAV-C) to the UAE server.

Table 7.4.3.4-1: C2-related trigger event report

Information element	Status	Description
UAE client ID	M	The identifier of the UAE client which indicates the QoS downgrade
UAS UE ID(s)	O	The identifier of the UE ID(s) for which the PC5 connectivity is feasible/available..
Application QoS-related event	M	The report including the expected or actual application QoS / QoE parameters which were change (i.e. latency, throughput, reliability, jitter) of Network-Assisted C2 communication link 1 or UTM-Navigated C2 communication link 1. The event configuration (thresholds, policies) is provided to the UAE client as described in clause 7.4.2.4.
Application QoS-related event of Network-Assisted C2 communication link 2 or UTM-Navigated C2 communication link 2	O	The report including the expected or actual application QoS / QoE parameters which were changed (i.e. latency, throughput, reliability, jitter) of Network-Assisted C2 communication link 2 or UTM-Navigated C2 communication link 2. The event configuration (thresholds, policies) is provided to the UAE client as described in clause 7.4.2.4.
PC5 availability indication	O	The PC5 availability indication for the direct C2 mode.
> PC5 capabilities	O	The PC5/ProSe capabilities and configuration information of the involved UAS UEs.
> PC5 QoS/access information	O	The PC5 QoS (list of PQIs) and access related information (e.g. DRX cycles, resource pools).
> Time of validity	O	The time for which the direct mode is available.

7.4.3.5 C2 mode switching confirmation request

Table 7.4.3.5-1 describes the information flow C2 mode switching confirmation request from the UAE server to the UAS application specific server.

Table 7.4.3.5-1: C2 mode switching confirmation request

Information element	Status	Description
UAE server ID	M	The identifier of the UAE server which requests the C2 mode switching confirmation from USS/UTM
UAS ID	M	The identification of the UAS. This could be in form of identifier for the UAS, e.g. group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI.
C2 operation mode switching type	M	The type of the C2 mode switching to be applied (network-assisted to network-assisted, UTM-Navigated to UTM-Navigated, direct to network-assisted, network-assisted to direct, or UTM-Navigated).
Switching cause	O	Cause information for initiating the switching (e.g. poor radio link quality)

7.4.3.6 C2 mode switching confirmation response

Table 7.4.3.6-1 describes the information flow C2 mode switching confirmation response from the UAS application specific server (USS/UTM) to the UAE server.

Table 7.4.3.6-1: C2 mode switching confirmation response

Information element	Status	Description
Result	M	The positive or negative result of the C2 mode switching confirmation response.

7.4.3.7 C2 operation mode switching

Table 7.4.3.7-1 describes the information flow C2 operation mode switching from the UAE server to the UAE client(s) of the affected UAS.

Table 7.4.3.7-1: C2 operation mode switching

Information element	Status	Description
UAE server ID	M	The identifier of the UAE server which instructs the UAS to apply the C2 mode switching.
C2 operation mode switching requirement	M	The type of the C2 mode switching to be applied (network-assisted to network-assisted, UTM-Navigated to UTM-Navigated, direct to network-assisted, or network-assisted to direct).
Time Validity	O	Time validity for the C2 switching requirement
Geographical Area	O	Area for which the C2 switching applies

7.4.3.8 C2 communication modes configuration request

Table 7.4.3.8-1 describes the information flow C2 communication modes configuration request from the UAE server to the UAE client.

Table 7.4.3.8-1: C2 communication modes configuration request

Information element	Status	Description
UAS ID	M	The identification of the UAS for which the C2 QoS management request applies. This could be in form of identifier for the UAS, e.g. group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI.
C2 operation mode management configuration (see NOTE 2)	O	The C2 operation mode management configuration information to be configured at the UAS
> C2 operation mode management requirement	M	Identification of the type of the C2 mode switching to be supported by the UAE server. This can be either from direct to network-assisted C2, or from network-assisted to direct C2 or to UTM-Navigated.
> Allowed C2 communication modes	M	direct, network assisted, UTM-Navigated
> Primary C2 communication mode	M	Primary C2 communication mode (direct, network assisted)
> Secondary C2 communication mode	O	Secondary C2 communication mode (direct, network assisted)
> Policy of C2 switching	M	Parameters for C2 switching - QoS thresholds on active link - QoS thresholds on target link
> Dual Network-Assisted C2 communication links	O	Support for multiple Network-Assisted C2 communication links. This information element may only be present if the UAE client has indicated this capability to the UAE server at the UAE layer registration.
>> Policy of C2 switching in case of Network-Assisted C2 communication link 1	O	Parameters for C2 switching for Network-Assisted C2 communication link 1: - QoS threshold needed for C2 communication per subscription/network, QoS threshold needed for payload (user plane) communication per subscription/network.
>> Policy of C2 switching in case of Network-Assisted C2 communication link 2	O	Parameters for C2 switching for Network-Assisted C2 communication link 2: - QoS threshold needed for C2 communication per subscription to activate simultaneously both subscriptions/networks, QoS threshold needed for payload (user plane) communication per subscription to activate simultaneously both subscriptions/networks.
>> C2 service area for Network-Assisted C2 communication link 1	O	The area where the C2 operation mode management request applies. This can be geographical area, or topological area in which the connectivity via subscription/network 1 is active.
>> C2 service area for Network-Assisted C2 communication link 2	O	The area where the C2 operation mode management request applies. This can be geographical area, or topological area in which the connectivity via subscription/network 2 is active.
> Dual UTM-Navigated C2 communication links	O	Support for multiple UTM-Navigated C2 communication links. This information element may only be present if the UAE client has indicated this capability to the UAE server at the UAE layer registration.
>> Policy of C2 switching in case of UTM-Navigated C2 communication link 1	O	Parameters for C2 switching for UTM-Navigated C2 communication link 1: - QoS threshold needed for C2 communication per subscription/network, QoS threshold needed for payload (user plane) communication per subscription/network.

>> Policy of C2 switching in case of UTM-Navigated C2 communication link 2	O	Parameters for C2 switching for UTM-Navigated C2 communication link 2: - QoS threshold needed for C2 communication per subscription to activate simultaneously both subscriptions/networks, QoS threshold needed for payload (user plane) communication per subscription to activate simultaneously both subscriptions/networks.
>> C2 service area for UTM-Navigated C2 communication link 1	O	The area where the C2 operation mode management request applies. This can be geographical area, or topological area in which the connectivity via subscription/network 1 is active.
>> C2 service area for UTM-Navigated C2 communication link 2	O	The area where the C2 operation mode management request applies. This can be geographical area, or topological area in which the connectivity via subscription/network 2 is active.
NOTE 1: Void NOTE 2: If C2 operation mode management configuration IE is not included, it indicates removal of the C2 operation mode management configuration at the UAS ID.		

7.4.3.9 C2 communication modes configuration response

Table 7.4.3.9-1 describes the information flow C2 communication modes configuration response from the UAE client to the UAE server.

Table 7.4.3.9-1: C2 communication modes configuration response

Information element	Status	Description
Result	M	The positive or negative result of reception and storing or removal of the communication mode configuration parameters

7.4.3.10 C2 communication mode notification

Table 7.4.3.10-1 describes the information flow C2 communication mode notification from the UAE client to the UAE server and from the UAE server to the UAS application specific server.

Table 7.4.3.10-1: C2 communication mode notification

Information element	Status	Description
UAS ID	M	The identification of the UAS. This could be in form of identifier for the UAS, e.g. group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI.
Selected primary C2 communication mode	M	Selected primary C2 communication mode (direct, network assisted, UTM-Navigated or via specific subscription)
Selected secondary C2 communication mode	O	Selected secondary C2 communication mode (direct, network assisted, UTM-Navigated or via specific subscription)

7.4.3.11 C2 communication mode notification acknowledgement

Table 7.4.3.11-1 describes the information flow C2 communication mode notification acknowledgement from the UAE server to the UAE client and from the UAS application specific server to the UAE server.

Table 7.4.3.11-1: C2 communication mode notification acknowledgement

Information element	Status	Description
Acknowledgement	M	Acknowledgement of selected C2 communication mode(s)

7.4.3.12 C2 operation mode switching performed

Table 7.4.3.12-1 describes the information flow C2 operation mode switching performed from the UAE client to the UAE server.

Table 7.4.3.12-1: C2 operation mode switching performed

Information element	Status	Description
Result	M	The result of the C2 mode switching

7.5 Real-Time UAV Connection Status Monitoring and Location reporting

7.5.1 General

This clause enables the UAE server to provide a real-time view of UAV network status and location reporting based on current network connection status, in particular with the supporting of following use cases:

- Support of real-time monitor the 3GPP network connection with UAVs.
- Support of reporting of loss of communication with UAVs.
- Support of location reporting such as last known location after loss of communication.

7.5.2 Procedures

7.5.2.1 Procedure for real-time UAV network connection status monitoring and location update

Figure 7.5.2.1-1 illustrates the real-time network monitoring and location update support for UAV operations.

Pre-conditions:

- UAE server has subscribed to the monitoring event API for connection monitoring by the NRM server for both UAV and/or UAV client as specified in clause 14.3.6.2.2 of 3GPP TS 23.434 [5].
- UAE server has subscribed for the location information and location deviation monitoring events of UAV from LM server as per the clause 9.3.7 and clause 9.3.11.2 specified in 3GPP TS 23.434 [5].
- Subscription for real-time UAV status information is performed as specified in clause 7.5.2.2.

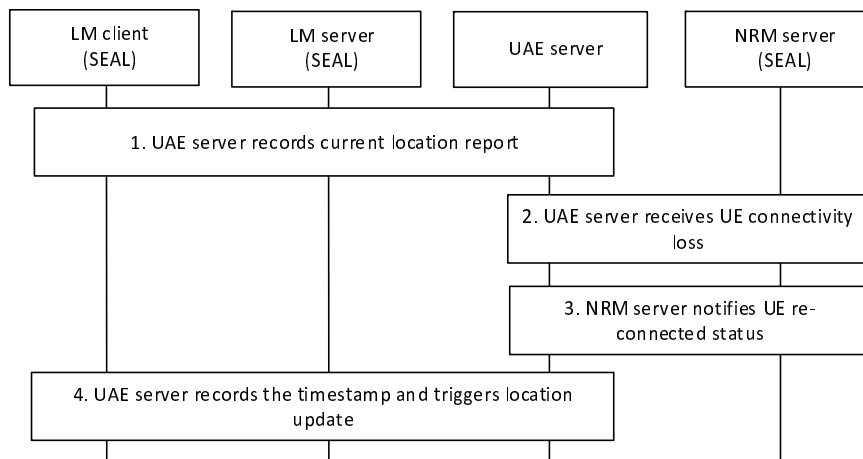


Figure 7.5.2.1-1: Real-time UAV network connection status monitoring and location update

1. The UAE server receives location report and location deviation monitoring event notifications from LM server as specified in clause 9.3.8 and clause 9.3.11.2 of 3GPP TS 23.434 [5]. UAE server shall record the current location reporting timestamp as specified in clause 9.3.2.2 of 3GPP TS 23.434 [5].
2. The UAE server receives monitoring events notification as specified in clause 14.3.6.3.2 of 3GPP TS 23.434 [5]. If events are regarding loss of UE reachability such as when received "Loss_of_connectivity_notification", the UAE server shall record such event with current timestamp.
3. NRM server sends notification when UE re-connected status is detected as specified in clause 14.3.6.3.2 of 3GPP TS 23.434 [5].
4. The UAE server shall record such event with current timestamp, plus with last known location information and timestamp as specified in clause 9.3.2.7 of 3GPP TS 23.434 [5] and trigger location update as specified in clause 9.3.4 of 3GPP TS 23.434 [5].

7.5.2.2 Subscription for real-time UAV status information

Figure 7.5.2.2-1 describes the procedure for subscription for real-time UAV status information.

Pre-condition:

- UAS application specific server has been provisioned with UAE server information.

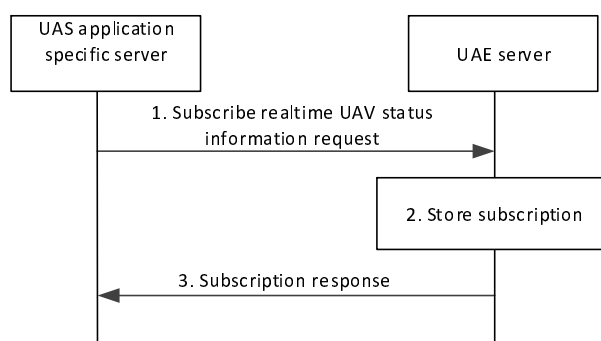


Figure 7.5.2.2-1: Subscription for real-time UAV status information

1. The UAE application specific server sends subscribe real-time UAV status information request to the UAE server. The request includes one or more UAV ID(s).
2. The UAE server stores the subscription information.
3. The UAE server sends subscription response to the UAS application specific server.

7.5.2.3 Notification of real-time UAV status information

Pre-conditions:

- UAS application specific server has performed subscription as per procedure in clause 7.5.2.2 with UAE server and the procedure for processing real-time UAV status as specified in clause 7.5.2.1 has performed.

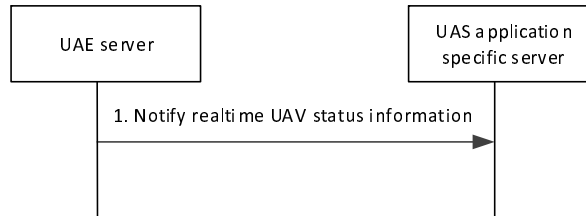


Figure 7.5.2.3-1: Notification for real-time UAV status information

1. When real-time UAV status information is available at the UAE as per the subscription then, the UAE server sends notification of one or more real-time UAV(s) status information to the UAS application specific server.

7.5.2.4 Unsubscription for real-time UAV status information

Figure 7.5.2.4-1 describes the procedure for unsubscription for real-time UAV status information.

Pre-condition:

- UAS application specific server has performed the subscription procedure as specified in clause 7.5.2.2.

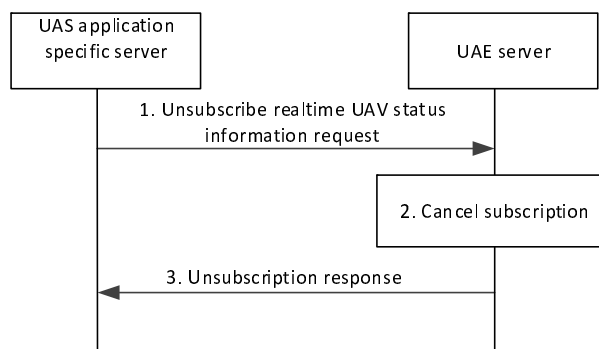


Figure 7.5.2.4-1: Unsubscription for real-time UAV status information

1. The UAE application specific server sends unsubscribe real-time UAV status information request to the UAE server. The request includes the subscription ID.
2. The UAE server cancels the subscription information.
3. The UAE server sends unsubscription response to the UAS application specific server.

7.5.3 Information flows

7.5.3.1 Information flows between UAE server and SEAL servers

The usage of information flows between UAE server and SEAL's Location Management Server is specified in clause 7.1.3.2.

The usage of information flows between UAE server and SEAL's Network Resource Management Server is specified in clause 7.1.4.2.

7.5.3.2 Subscribe real-time UAV status information request

Table 7.5.3.2-1 describes the information flow for a UAS application specific server to subscribe to real-time UAV status information at the UAE server.

Table 7.5.3.2-1: Subscribe real-time UAV status information request

Information element	Status	Description
UASS ID	M	The identifier of the UAS application specific server which initiated this request.
UAV ID (s)	M	The identifier of one or more UAV(s) (e.g. 3GPP UE ID or CAA level UAV ID) for which the real-time UAV status is requested.
Area of Interest	M	Geographic area location information where the UASS server wishes to monitor the UAS's location adherence.
Notification Target URI	M	Target URI where the UAS application specific server wishes to receive the notifications about real-time UAV status information.

7.5.3.3 Subscribe real-time UAV status information response

Table 7.5.3.3-1 describes the information flow for UAE server to respond for real-time UAV status subscription request from the UAS application specific server.

Table 7.5.3.3-1: Subscribe real-time UAV status information response

Information element	Status	Description
Result	M	Result from the UAE server in response to subscription request indicating success or failure
Subscription ID (NOTE)	O	Identifier of a successful subscription.
NOTE: This IE is included when the Result indicates success		

7.5.3.4 Notify real-time UAV status information

Table 7.5.3.4-1 describes the information flow for a UAS application specific server to receive notification about real-time UAV status information from the UAE server.

Table 7.5.3.4-1: Notify real-time UAV status information

Information element	Status	Description
Subscription ID	M	Identifier of the subscription for this notification.
Real-time UAV(s) status information	M	One or more real-time UAV(s) status information
>UAV ID	M	The identifier of the UAV (e.g. 3GPP UE ID or CAA level UAV ID) for which the real-time UAV status information is notified.
>UAV status information	M	The UAV status information includes the UAV network connection status information, location information and timestamp.

7.5.3.5 Unsubscribe real-time UAV status information request

Table 7.5.3.5-1 describes the information flow for a UAS application specific server to unsubscribe to real-time UAV status information at the UAE server.

Table 7.5.3.5-1: Unsubscribe real-time UAV status information request

Information element	Status	Description
Subscription ID	M	Identifier of the subscription for this notification.

7.5.3.6 Unsubscribe real-time UAV status information response

Table 7.5.3.6-1 describes the information flow for UAE server to respond for real-time UAV status unsubscription request from the UAS application specific server.

Table 7.5.3.6-1: Unsubscribe real-time UAV status information response

Information element	Status	Description
Result	M	Result from the UAE server in response to unsubscription request indicating success or failure

7.6 Change of USS during flight

7.6.1 General

This feature introduces the UAS application enablement services for supporting change of UAS application specific server. In particular, the UAE layer provides support for the following operations:

- Support of the registration of the UAE clients multi-USS capability to the UAE server as described in clause 7.1a.
- Support the distribution of the for multi-USS policies from the UAS application specific server to the UAE server and the UAE client, as described in clause 7.6.2.1 and clause 7.6.2.2.
- Support the change of UAS application specific server, as described in clause 7.6.2.3.
- Support the UAE server triggered change of USS, as described in clause 7.6.2.5.

NOTE: The functions of the USS are out of scope of the present specification.

7.6.2 Procedures

7.6.2.1 Management of multi-USS configuration

This procedure manages the multi-USS policies at the UAE server, based on an application request from UAS application specific server to support the change of USS for a UAS.

Figure 7.6.2.1-1 illustrates the procedure where the UAE server receives an application request for managing the multi-USS policies for a UAS from the UAS application specific server.

Pre-condition:

- The UAV has received its UAS ID from the UAS application specific server.
- The UAV has performed the UAS UE registration procedure.

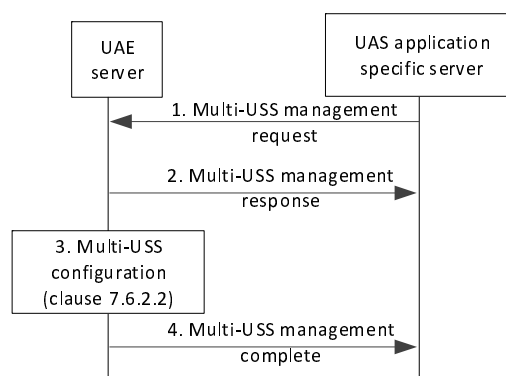


Figure 7.6.2.1-1: Multi-USS management procedure

1. The UAS application specific server sends to the UAE server a Multi-USS management request. The request includes the UAV (UAE client) identifier and the Multi-USS policies. A Multi-USS policy contains: allowed target USSes (identified by e.g. FQDN), serving USS information, and additional information for change of USS (USS change constraints parameter geo location/area threshold for change of USS by UAV). The UAE server stores the Multi-USS policies corresponding to the UAV ID. In case of removal of a Multi-USS policy for a USS from the UAE server, the request shall include the UAV identifier and a USS identifier (e.g. FQDN) for the USS that will be removed.
2. The UAE server sends to the UAS application specific server a Multi-USS management response with a positive or negative acknowledgement of the request.
3. UAE server executes the multi-USS configuration according to clause 7.6.2.2.
4. After execution of USS management configuration, the UAE server notifies the UAS application specific server with a Multi-USS management complete based on the configured capabilities of the UAE client.

7.6.2.2 Multi-USS configuration

This procedure enables the configuration of the UAE client, based on a request from UAS application specific server to configure multi-USS policies to the UAE client.

Figure 7.6.2.2-1 illustrates the Multi-USS configuration procedure.

Pre-conditions:

1. The UAS UEs are connected to 5GS and authenticated and authorized by UAS application specific server as specified in clause 5.2 of 3GPP TS 23.256 [4].
2. UAE server has established a UAE session with the respective UAE clients as the UAE clients are successfully registered to the UAE server.
3. UAE server has performed the Multi-USS management procedure according to clause 7.6.2.1.

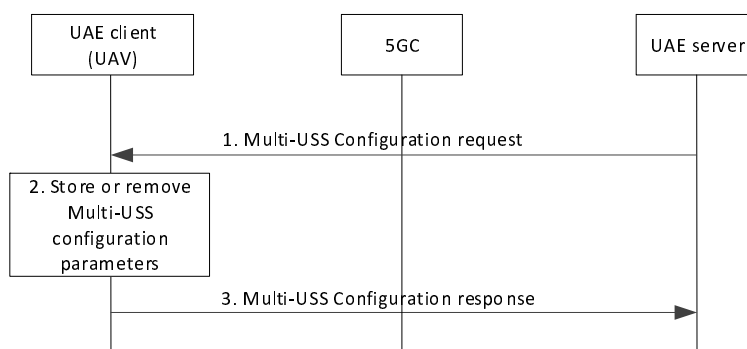


Figure 7.6.2.2-1: Multi-USS configuration

1. The UAE server sends a Multi-USS configuration request to the UAE client. The UAE client receives a Multi-USS configuration request that includes the Multi-USS policies from the UAE server. In case of removal of one or more Multi-USS policies for a USS from the UAE client, then the request shall only include a USS identifier (e.g. FQDN) for the USSes that will be removed.
2. The UAE client stores or removes the Multi-USS policies as per the information received in step 1.
3. The UAE client sends a Multi-USS configuration response to the UAE server.

7.6.2.3 UAE layer assisted change of USS

This procedure provides a mechanism for supporting dynamic change of USS which may be performed while the UAV flight is ongoing, due to expected location/mobility of the UAV, emergency events, etc.

Figure 7.6.2.3-1 illustrates the procedure where the UAE server supports the change of USS.

Pre-conditions:

1. UAE client has indicated support of change of USS by the Multi-USS capability.
2. UAS application specific server has provided Multi-USS policies to the UAE client and the UAE server.

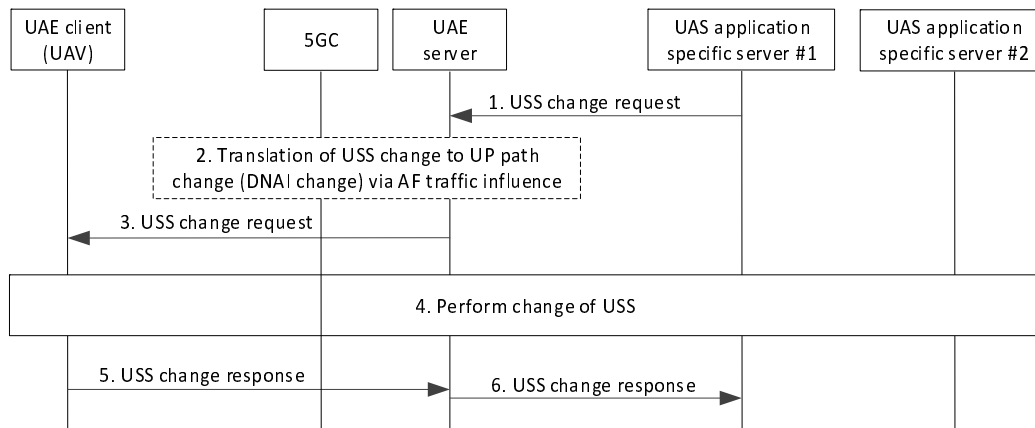


Figure 7.6.2.3-1: UAE layer assisted change of USS

1. The UAE server receives a USS change request from a serving USS (UAS application specific server #1), indicating that a target USS (UAS application specific server #2) can take over the communication. The request includes the UAV (UAE client) identification information, target USS information and USS change authorization information (e.g. authorization token). Optionally, updated Multi-USS policies for one or more USSes can be included. The UAE server verifies that the request is authorized (e.g., Multi-USS capability is enabled, new USS part of the allowed USS information).
2. If required, the UAE server translates this to a UP path change and interacts with NEF as AF for influence UP path (switching to target DNAI). In particular UAE server (acting as AF) checks whether it can serve the target DNAI corresponding to the target USS based on the mapping of USS to DNAI which was performed in step 2 of clause 7.6.2.5. Interaction with 5GC is performed according to functionality for application function influence on traffic routing, see 3GPP TS 23.502 [13] clause 4.3.6.3.
3. The UAE server forwards the USS change request to the UAE client including target USS information and updated Multi-USS policies.
4. Perform change of USS.
The UAE client initiates communication with the target USS based on the USS change request and the Multi-USS policies.
5. The UAE client sends a USS change response indicating to what USS the change of USS has been performed.
6. The UAE server sends a USS change response to the UAS application specific server indicating that a change of USS has been performed.

7.6.2.4 UAE client assisted change of USS

This procedure enables the UAE client to provide a dynamic change of USS while the UAV flight is ongoing, due to an emergency change of USS deemed necessary by the UAE client. The UAE client initiates the change of USS on behalf of the USS based on previously provided Multi-USS policy.

Figure 7.6.2.4-1 illustrates the procedure where the UAE server supports the change of USS.

Pre-conditions:

1. UAE client has indicated support of change of USS by the Multi-USS capability.

2. UAS application specific server has provided Multi-USS policies to the UAE client and the UAE server.

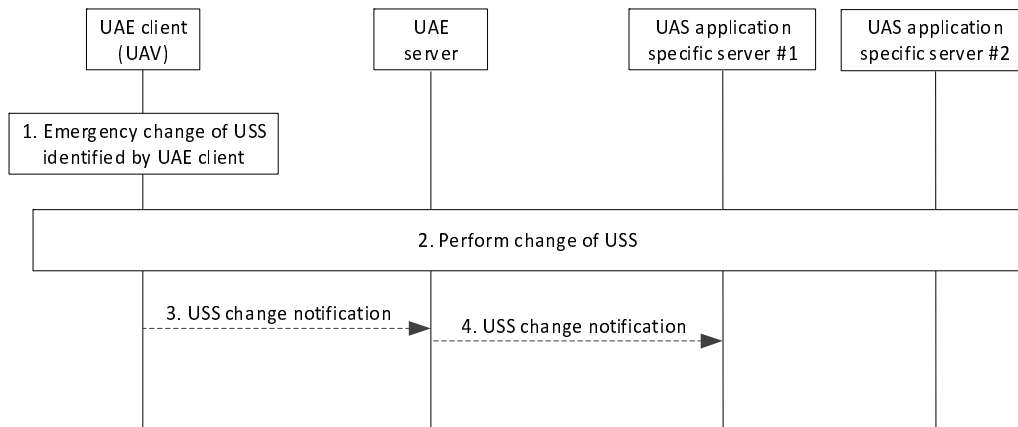


Figure 7.6.2.4-1: UAE client assisted change of USS

1. An emergency change of USS is deemed necessary by the UAE Client, and the UAE client initiates the change of USS on behalf of the USS based on previously provided Multi-USS policy.
2. Perform change of USS. The UAE client initiates communication with the target USS (UAS application specific server #2) based on the previously provided Multi-USS policies.
3. The UAE client sends a USS change notification indicating to what USS the change of USS has been performed. The identity of the target USS (UAS application specific server #2) is included. The USS change notification is only sent if the UAE client has a connection to the UAE server.
4. The UAE server sends a USS change notification to the UAS application specific server #1 indicating that a change of USS has been performed.

7.6.2.5 UAE server triggered change of USS

In multi-USS scenarios, each USS can be physically located in different clouds, and it is also possible that a USS is deployed at the edge.

Figure 7.6.2.5-1 illustrates the procedure where the UAE server supports change of USS for a multi-USS/LUN scenario, where the interaction with the communication network for supporting a UAS session requires the interaction to more than one USS e.g., due to UAV mobility to different geographical area covered by different edge clouds.

Pre-conditions:

- The UAV has performed the UAS UE registration procedure.
- UAE client and UAE server have indicated multi-USS support.

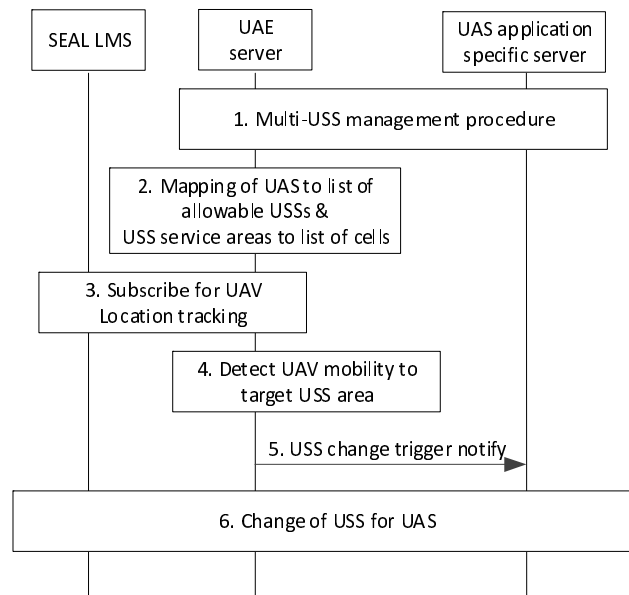


Figure 7.6.2.5-1: UAE server triggered change of USS

1. The UAE server has performed the USS management procedure of clause 7.6.3.1; however, at the multi-USS management request, UAE server also receives from UAS application specific server the USS service areas (geographical) for all allowed USSs, and optionally the USS to DNAI mapping and a USS list per given Local USS network (LUN).
2. The UAE server maps each USS with different topological areas based on the USS to DNAI mapping (based on step 1), for all USSs which are allowed for a target area where the UAV is allowed to fly (e.g. within the LUN). Then it also maps and stores all pairs of <USS x, DNAI y> per LUN or for the areas of interest for the UAV (e.g., based on the allowable routes).
3. The UAE server tracks the location of the UAV, by requesting on-demand location monitoring from SEAL LMS (acting as VAL server in procedure of clause 9.3.4 or clause 9.3.5 of 3GPP TS 23.434 [5]) or via subscribing for monitoring the UAV location deviation (specified in clause 9.3.11 of 3GPP TS 23.434 [5]).
4. The UAE server detects an expected UAV location change to an area covered by a different USS (based on SEAL LMS monitoring subscription/request as in step 3), it generates a trigger event indicating that the UE moves to an area where the USS is overlapping with other USS, or another overlapping USS within LUN area is not available.

If it is an overlap, the UAE server checks whether the performance of serving USS is expected to get impacted (e.g., by requesting DN performance analytics for the target area) or if the serving USS is not supported at target area, checks what is the best available USS and whether this can provide the same services. The criteria for the best available USS may relate to the location of the UAV, but it can also be the priorities of the USS (based on the policies received) at the target area and the capabilities (services) provided by the target USS.

5. The UAE server sends to the UAS application specific server a USS change trigger notify indicating the recommendation for a USS change for the UAS and provides the target USS ID. Alternatively, the trigger message indicates a UAV mobility event, based on steps 3/4.
6. The UAS change procedure follows as specified in 7.6.2.3.

7.6.3 Information flows

7.6.3.1 Multi-USS management request

Table 7.6.3.1-1 describes the information flow Multi-USS management request from the UAS application specific server to the UAE server.

Table 7.6.3.1-1: Multi-USS management request

Information element	Status	Description
UASS ID	M	Identity of the UAS application specific server which requests the Multi-USS management. This ID can be the USS identifier, when the UAS application specific server is the USS.
UAS ID	M	The identification of the UAS for which the Multi-USS management request applies. This could be in form of identifier for the UAS, e.g group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI
UAS registration area	O	The registration area where the UAV is allowed to fly
UAS allowed route	O	The UAV allowed route within the registration area.
Multi-USS policy management container (see NOTE)	O	The Multi-USS policy management container consists of the requirements and policy for Multi-USS management.
> Serving USS information	M	Information about the serving USS identifier
> Additional information for change of USS	M	Information about the serving USS, related with the switch to a particular target USS
> Area for change of USS	M	The area where the Multi-USS management request applies. This can be geographical area, or topological area in which the capability is active.
> Allowed USS(s) information	O	The information for the allowed USSs for the UAS.
>> USS ID	M	The identity of the allowed USS from the list of USSs for the target UAS (identified e.g. by FQDN)
>> USS service area	M	The geographical area per USS
>> USS service requirements	M	The capabilities and key performance requirements per each USS service.
>> List of USS DNAI(s)	M	DNAI(s) associated with the target USS.
>> LUN ID	M	Identity of the LUN where the report applies
NOTE: If Multi-USS policy management container is not included for a USS, it indicates removal of the Multi-USS policy management related information for this USS.		

7.6.3.2 Multi-USS management response

Table 7.6.3.2-1 describes the information flow Multi-USS management response from the UAE server to the UAS application specific server.

Table 7.6.3.2-1: Multi-USS management response

Information element	Status	Description
Result	M	The positive or negative result of the Multi-USS management request.

7.6.3.3 Multi-USS management complete

Table 7.6.3.3-1 describes the information flow Multi-USS management complete from the UAE server to the UAS application specific server.

Table 7.6.3.3-1: Multi-USS management complete

Information element	Status	Description
Result	M	The positive or negative result of the Multi-USS configuration.

7.6.3.4 Multi-USS configuration request

Table 7.6.3.4-1 describes the information flow Multi-USS configuration request from the UAE server to the UAE client.

Table 7.6.3.4-1: Multi-USS configuration request

Information element	Status	Description
UAS ID	M	The identification of the UAS for which the Multi-USS configuration request applies. This could be in form of identifier for the UAS, e.g. group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI.
Multi-USS policy management configuration (see NOTE)	O	The Multi-USS policy management configuration information to be configured at the UAS.
> Allowed USS	M	Identifier of a USS that can be the target of a switch (identified e.g. by FQDN)
> Serving USS information	M	Information about the serving USS identifier
> Additional information for change of USS	M	Information about the serving USS, related with the switch to a particular target USS
> Area for change of USS	M	The area where the Multi-USS management request applies. This can be geographical area, or topological area in which the capability is active.
NOTE: If Multi-USS policy management configuration is not included for a USS, it indicates removal of the Multi-USS policy management configuration for this USS.		

7.6.3.5 Multi-USS configuration response

Table 7.6.3.5-1 describes the information flow Multi-USS configuration response from the UAE client to the UAE server.

Table 7.6.3.5-1: Multi-USS configuration response

Information element	Status	Description
Result	M	The positive or negative result of the Multi-USS configuration

7.6.3.6 USS change request

Table 7.6.3.6-1 describes the information flow USS change request from the UAS application specific server to the UAE server and from the UAE server to the UAE client.

Table 7.6.3.6-1: USS change request

Information element	Status	Description
UASS ID	M	Identity of the UAS application specific server which requests the change of USS. This ID can be the USS identifier, when the UAS application specific server is the USS.
UAS ID	M	The identification of the UAS for which the USS change request applies. This could be in form of identifier for the UAS, e.g. group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI.
USS change authorization information	M	An authorization token to verify the request.
Target USS	M	Identification of the USS that is the target of a switch (identified e.g. by FQDN)
Target USS info	M	Information for the target USS
> USS endpoint	M	Endpoint information (e.g. URI, FQDN, IP address) used to communicate with the USS.
> USS capabilities	O	The capabilities supported by the target USS
> LUN ID	O	Identity of the LUN where the serving/target USS belongs
>List of USS DNAI(s)	O	DNAI(s) associated with the target USS.

7.6.3.7 USS change response

Table 7.6.3.7-1 describes the information flow USS change response from the UAE client to the UAE server and from the UAE server to the UAS application specific server.

Table 7.6.3.7-1: USS change response

Information element	Status	Description
Result	M	The positive or negative result of the USS change request.

7.6.3.8 USS change notification

Table 7.6.3.8-1 describes the information flow USS change notification from the UAE client to the UAE server and from the UAE server to the UAS application specific server.

Table 7.6.3.8-1: USS change notification

Information element	Status	Description
Reason	M	Reason for change of /USS.
Target USS information	M	Identifier of the new USS that the UAV has connected to (identified e.g. by FQDN).

7.6.3.9 USS change trigger notify

Table 7.6.3.9-1 describes the information flow USS change trigger notify from the UAE server to the UAS application specific server.

Table 7.6.3.9-1: USS change trigger notify

Information element	Status	Description
UAS ID	M	Identity of the UAS for which the trigger applies
Serving USS ID	M	Identity of the serving USS
Target USS ID	O	Identity of the target USS based on the recommendation
LUN ID	O	Identity of the LUN where the serving USS belongs
UAV mobility event	O	The mobility event e.g., expected UE mobility to a service area outside the current USS serving area

7.7 UAE layer support for DAA services and applications

7.7.1 General

This feature enables the UAS application enablement services for assisting the UAS application with DAA handling. In particular, the UAE layer provides support for the following operations:

- Support of the registration of the UAE clients DAA assistance capability and, if supported, the LDGS capability to the UAE server as described in clause 7.1a.
- Support the distribution of the DAA application policy from the UAS application specific server to the UAE server and the UAE client, as described in clause 7.7.2.1.
- Support the UAS application with DAA, as described in clause 7.7.2.2.

NOTE: The Detect and Avoid operations are out of scope of the present specification.

7.7.2 Procedures


7.7.2.1 Configuration of DAA policies to the UAE layer and the UAS client

7.7.2.1.1 Management of DAA support configuration

Figure 7.7.2.1.1-1 illustrates the DAA support management procedure where the UAE server receives an application request for managing the DAA application policy from the UAS application specific server.

Pre-condition:

1. The UAV has received its UAS ID from the UAS application specific server.
2. The UAV has performed the UAS UE registration procedure.

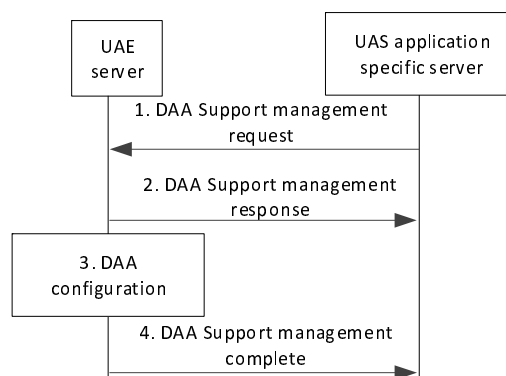**Figure 7.7.2.1.1-1: DAA support management procedure**

1. The UAS application specific server sends to the UAE server a DAA support management request. The request includes the UAV (UAE client) identifier and the DAA application policy. If the procedure is for LDGS assisted

DAA, then the request may include a list of UAE client identifiers (LDGS IDs) and/or geographical area so UAE server may select the relevant UAE client(s). The DAA application policy includes parameters for the control of LDGS assisted DAA.

2. The UAE server shall send to the UAS application specific server a DAA support management response with a positive or negative acknowledgement of the request.
3. The UAE server shall timestamp and store the DAA application policy and execute the DAA configuration according to clause 7.7.2.1.2.
4. After execution of DAA configuration, the UAE server shall send a DAA support management complete to the UAS application specific server.

7.7.2.1.2 DAA support configuration procedure

Figure 7.7.2.1.2-1 illustrates the DAA support configuration procedure. This procedure enables the configuration of the UAE client, based on a request from UAS application specific server to configure the DAA application policy to the UAE client.

Pre-conditions:

1. The UAS UEs are connected to 5GS and authenticated and authorized by UAS application specific server as specified in clause 5.2 of 3GPP TS 23.256 [4].
2. UAE server has established a UAE session with the respective UAE clients as the UAE clients are successfully registered to the UAE server.
3. UAE server has performed the DAA support management procedure according to clause 7.7.2.1.1.

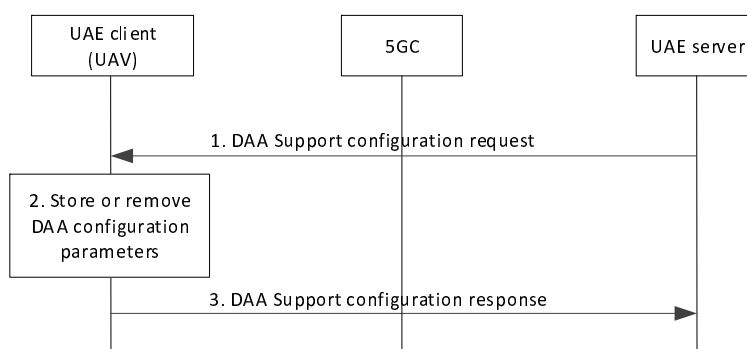


Figure 7.7.2.1.2-1: DAA support configuration procedure

1. The UAE server shall send a DAA support configuration request to the UAE client. The UAE client receives a DAA support configuration request from the UAE server that includes the DAA application policy. If the UAE client has LDGS capability, and the procedure is for LDGS assisted DAA, then the DAA application policy includes parameters for the control of LDGS assisted DAA.

NOTE: The UAE client can serve multiple USSes, hence, the UAE client receives configuration information pertaining to each USS.

2. The UAE client shall store or remove the DAA application policy as per the information received in step 1. The DAA application policy is forwarded to the UAS application.
3. The UAE client shall send a DAA support configuration response to the UAE server.

7.7.2.2 UAE layer support for DAA applications

7.7.2.2.1 DAA support involving UAVs with U2X support

Figure 7.7.2.2.1-1 illustrates the procedure with DAA support involving UAVs with U2X support. If the UAE client has LDGS capabilities, the UAE client provides ground based DAA assistance for the target UAVs in its monitoring range.

Pre-conditions:

1. UAE server has provided the DAA application policy to the UAE client.
2. The UAE client can communicate with the target UAVs using U2X communication.

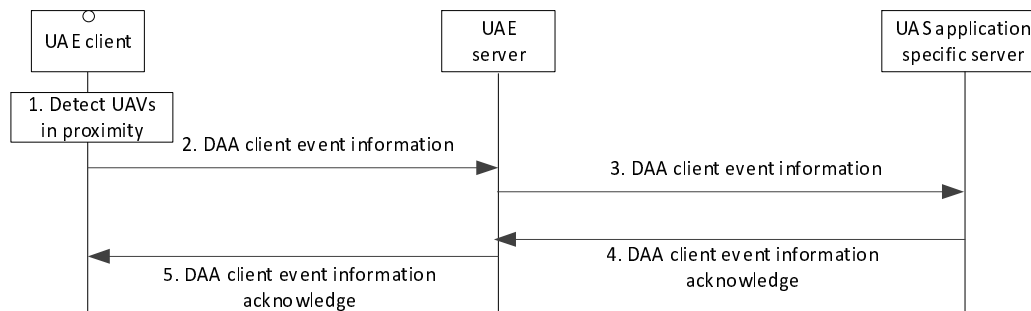


Figure 7.7.2.2.1-1: DAA support involving UAVs with U2X support

1. The UAE layer has, e.g. based on information provided by the U2X layer, detected UAVs in proximity, see 3GPP TS 23.256 [4] clause 5.6. The UAE client informs its own UAS application specific server about the detected collision. If the UAE client has LDGS capability, and the procedure is for LDGS assisted DAA, then based on the configuration/policy received from the USSes (e.g., DAA triggering thresholds), the LDGS assists with deconfliction by detecting possible collisions.
2. The UAE client shall send a DAA client event information to the UAE server with information about one or more UAVs in proximity as detected or about a LDGS collision detection performed in step 1.
3. The UAE server shall record the DAA client event information with current timestamp. UAE server shall request UAE client location information from the SEAL location services. The UAE server shall record the received location information with current timestamp. The UAE server shall send the DAA client event information to the UAS application specific server.
4. The UAS application specific server provides a DAA client event information acknowledge to the UAE server. The UAS application specific server may include more information in the acknowledgement (e.g., other UAVs detected information by UAS application layer mechanisms, alternative flight path). If the event information indicates LDGS deconfliction assistance, the UAS application specific server sends DAA flightpath update to the LDGS.
5. The UAE server shall send a DAA client event information acknowledge to the UAE client, and the UAE client shall provide the application layer (i.e. UAS client) with the consolidated information from the UAS application specific server. If the UAE client has LDGS capability, and the procedure is for LDGS assisted DAA, then the LDGS assists with deconfliction by sending the flight path information to respective target UAVs using U2X connectivity.

7.7.2.2.2 DAA support involving UAVs without U2X support

Figure 7.7.2.2.2-1 illustrates the procedure with DAA support involving UAVs without U2X support.

Pre-conditions:

1. UAS application specific server has provided DAA configuration parameters to the UAE client.
2. The UAV does not support U2X layer.

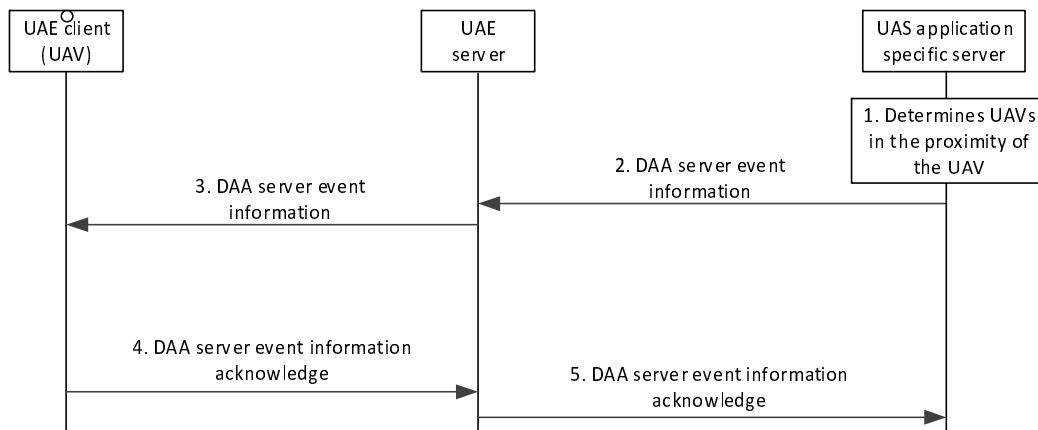


Figure 7.7.2.2-1: DAA support involving UAVs without U2X support

1. The UAS application specific server has received information about UAVs (e.g. via UAS application layer mechanism or as in step 3 of clause 7.7.2.2.1. The UAS application specific server determines the information of the UAVs which may be in the proximity of the UAV.
2. The UAS application specific server sends a DAA server event information to the UAE server which includes information of other UAVs in the proximity of the UAV. The UAE server shall verify that the request is authorized before sending the DAA server event information to the UAE client.
3. The UAE server performs coordination with Real-Time UAV connection status monitoring and location reporting is performed by the UAE server, see clause 7.5 and 3GPP TS 23.434 [5], clause 9.3. The UAE server shall send a DAA server event information to the UAE client comprising the UAVs information and location of each UAV in proximity of the UAV.
4. The UAE client shall send to the UAE server a DAA server event information acknowledge.
5. The UAE server shall send a DAA server event information acknowledge to the UAS application specific server.

7.7.3 Information flows

7.7.3.1 DAA support management request

Table 7.7.3.1-1 describes the information flow DAA support management request from the UAS application specific server to the UAE server.

Table 7.7.3.1-1: DAA support management request

Information element	Status	Description
UASS ID	M	Identity of the UAS application specific server which requests the DAA management. This ID can be the USS identifier, when the UAS application specific server is the USS.
UAS ID	M	The identification of the UAS (UAV or LDGS) for which the DAA support management request applies. This could be in form of identifier for the UAS, e.g., group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI
List of UAS ID	O	A list of UAS identification information, e.g. CAA level UAV ID, of the UAVs that are identified as target UAVs, is included when UAE client has LDGS capability.
Geographical area	O	The area where the DAA client configuration applies to locate relevant LDGS capable UAE clients. This can be geographical area, or topological area.
DAA application policy	O	The DAA application policy.
>DAA triggering thresholds	O	Indicate threshold for DAA, that determine when an LDGS may trigger detect and/or resolution of flightpath conflict.
>Time validity	O	Time validity where the DAA client configuration applies for an LDGS capable UAE client.
> Reporting frequency	O	Indication on how often the LDGS collect target UAVs information and how often UAS application specific server would like to be reported. This can be event based and / or time based.

7.7.3.2 DAA support management response

Table 7.7.3.2-1 describes the information flow DAA support management response from the UAE server to the UAS application specific server.

Table 7.7.3.2-1: DAA support management response

Information element	Status	Description
Result	M	The positive or negative result of the DAA support management request.

7.7.3.3 DAA support management complete

Table 7.7.3.3-1 describes the information flow DAA support management complete from the UAE server to the UAS application specific server.

Table 7.7.3.3-1: DAA support management complete

Information element	Status	Description
Result	M	The positive or negative result of provision of the DAA application policy to the UAS application.

7.7.3.4 DAA support configuration request

Table 7.7.3.4-1 describes the information flow DAA support configuration request from the UAE server to the UAE client.

Table 7.7.3.4-1: DAA support configuration request

Information element	Status	Description
UAS ID	M	The identification of the UAS (UAV or LDGS) for which the DAA management request applies. This could be in form of identifier for the UAS, e.g., group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI
List of UAS ID	O	A list of UAS identification information, e.g. CAA level UAV ID, of the UAVs that are identified as target UAVs, is included when UAE client has LDGS capability.
DAA application policy	O	The DAA application policy.
>DAA triggering thresholds	O	Indicate threshold for DAA, that determine when an LDGS may trigger detect and/or resolution of flightpath conflict.
>Time validity	O	Time validity where the DAA client configuration applies for an LDGS capable UAE client.
> Reporting frequency	O	Indication on how often the LDGS collect target UAVs information and how often UAS application specific server would like to be reported. This can be event based and / or time based.

7.7.3.5 DAA support configuration response

Table 7.7.3.5-1 describes the information flow DAA support configuration response from the UAE client to the UAE server.

Table 7.7.3.5-1: DAA support configuration response

Information element	Status	Description
Result	M	The positive or negative result of provision of the DAA application policy to the UAS application.

7.7.3.6 DAA client event information

Table 7.7.3.6-1 describes the information flow DAA client event information from the UAE client to the UAE server and from the UAE server to the UAS application specific server.

Table 7.7.3.6-1: DAA client event information

Information element	Status	Description
UAS ID	M	The identification of the UAS (UAV or LDGS) for which the DAA client support information applies. This could be in form of identifier for the UAS, e.g., group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI.
UAE layer detected information	M	List of UASes where e.g. U2X layer or LDGS has detected possible flight path conflict.
> UAS identity	M	The identification of e.g. a U2X-UAS where U2X layer has detected possible flight path conflict or an LDGS where LDGS has detected possible flight path conflict via U2X or Uu communication.
> Location information	M	Location of e.g. a U2X-UAS where U2X layer has detected possible flight path conflict or an LDGS where LDGS has detected possible flight path conflict via U2X or Uu communication.
> Associated alert	M	Alert based on the detection of the UAE client, e.g. collision detected, collision resolved etc.
Time of arrival	O	The time when UAS enters the monitoring range of an LDGS, reported by LDGS as event to USS for the purpose of tracking.
Time of departure	O	The time when UAS leaves the monitoring range of an LDGS, reported by LDGS as event to USS for the purpose of tracking.

7.7.3.7 DAA client event information acknowledge

Table 7.7.3.7-1 describes the information flow DAA client event information acknowledge from the UAS application specific server to the UAE server and from the UAE server to the UAE client.

Table 7.7.3.7-1: DAA client event information acknowledge

Information element	Status	Description
UAS ID	M	The identification of the UAS (UAV or LDGS) for which the DAA client support information acknowledge applies. This could be in form of identifier for the UAS, e.g., group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI
UAE layer detected information	M	List of UASes where the UAS application specific server has confirmed possible flight path conflict.
> UAS identity	M	The identification of a UAS where UAS application specific server has confirmed possible flight path conflict or an LDGS where LDGS has detected possible flight path conflict via U2X or Uu communication.
> Location information	M	Location of a UAS where UAS application specific server has confirmed possible flight path conflict or an LDGS where LDGS has detected possible flight path conflict via U2X or Uu communication.
> Updated flight path	O	Updated flight path from USS.

7.7.3.8 DAA server event information

Table 7.7.3.8-1 describes the information flow DAA server event information from the UAS application specific server to the UAE server and from the UAE server to the UAE client.

Table 7.7.3.8-1: DAA server event information

Information element	Status	Description
UAS ID	M	The identification of the UAS for which the DAA server support information applies. This could be in form of identifier for the UAS, e.g group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI
UAE layer detected information	M	List of UASes where the UAS application specific server has confirmed possible flight path conflict.
> UAS identity	M	The identification of an UAS where UAS application specific server has confirmed possible flight path conflict.
> Location information	M	Location of an UAS where UAS application specific server has confirmed possible flight path conflict.

7.7.3.9 DAA server event information acknowledge

Table 7.7.3.9-1 describes the information flow DAA server event information acknowledge from the UAE client to the UAE server and from the UAE server to the UAS application specific server.

Table 7.7.3.9-1: DAA server event information acknowledge

Information element	Status	Description
Reason	M	Acknowledgement of DAA server event information.

7.8 Tracking dynamic UAVs in an application defined area relative to a host UAV

7.8.1 General

The UAE server can be responsible for tracking a host UAV's dynamic information (i.e., information of other dynamic UAVs in an application defined area relative to a host UAV). As per a proximity range set by the application layer (e.g. UAS Application Specific Server), the UAE layer supports providing the dynamic information (i.e. other UAVs' location information) to the UAS Application Specific Server (UTM/USS) and/or to the host UAV. This feature can be utilized by UAS applications (e.g. DAA, Dynamic maps).

This feature utilizes the following procedures:

- UAS Application Specific Server or the host UAV subscription for host UAV's dynamic information with UAE server.
- UAE server tracking host UAV's UE location with support from SEAL's location management server.
- UAE server management of dynamic UE location based group.
- UAE server obtaining dynamic information from the UAVs in application defined proximity range of the host UAV.
- UAE server notification of host UAV's dynamic information to the UAS Application Specific Server and/or to the host UAV.

NOTE: The details of the usage of dynamic information of host UAV by UAS Application Specific Server or by the host UAV is out of scope of this specification.

7.8.2 Procedures

7.8.2.1 Subscription for host UAV dynamic information

Figure 7.8.2.1-1 describes the procedure for subscription for host UAV's dynamic information.

Pre-condition:

- UAS Application Specific Server has registered with UAE server 1 which is responsible for the host UAV.
- The UAV ID and application defined proximity range information are configured on the host UAV.

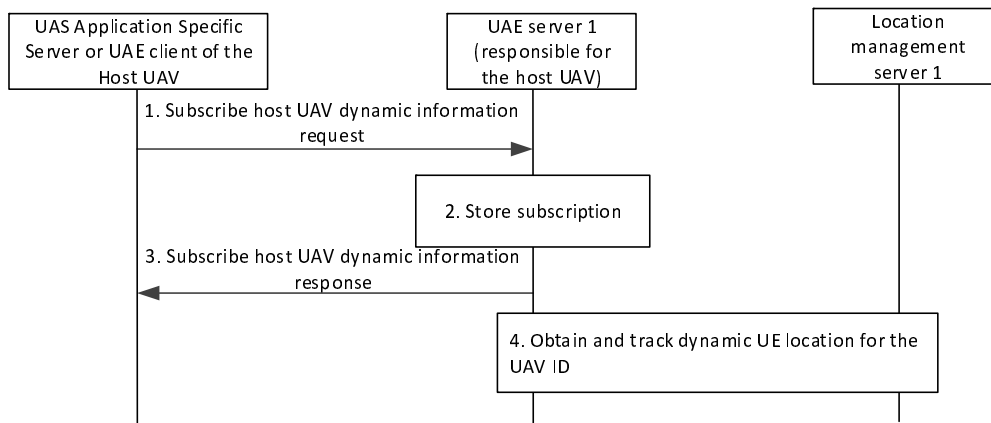


Figure 7.8.2.1-1: Subscription for host UAV dynamic information

1. The UAS Application Specific Server or UAE client of host UAV sends a subscribe host UAV dynamic information request to the UAE server 1. The request includes the UAV ID of the host UAV, application defined proximity range information.
2. The UAE server 1 stores the subscription information.
3. The UAE server 1 sends subscription response to the UAS Application Specific Server.
4. The UAE server 1 obtains and initiates tracking the host UAV location from the location management server 1 as specified in 3GPP TS 23.434 [5].

7.8.2.2 Management of dynamic UE location based group

Figure 7.8.2.2-1 describes the procedure for management of dynamic UE location based group.

Pre-condition:

- UAE server 1 has received an updated location of the host UAV as per procedure specified in 3GPP TS 23.434 [5].
- UAE server 1 is configured with UAE server 2..N information of other UAS operator and their supported region of operation.

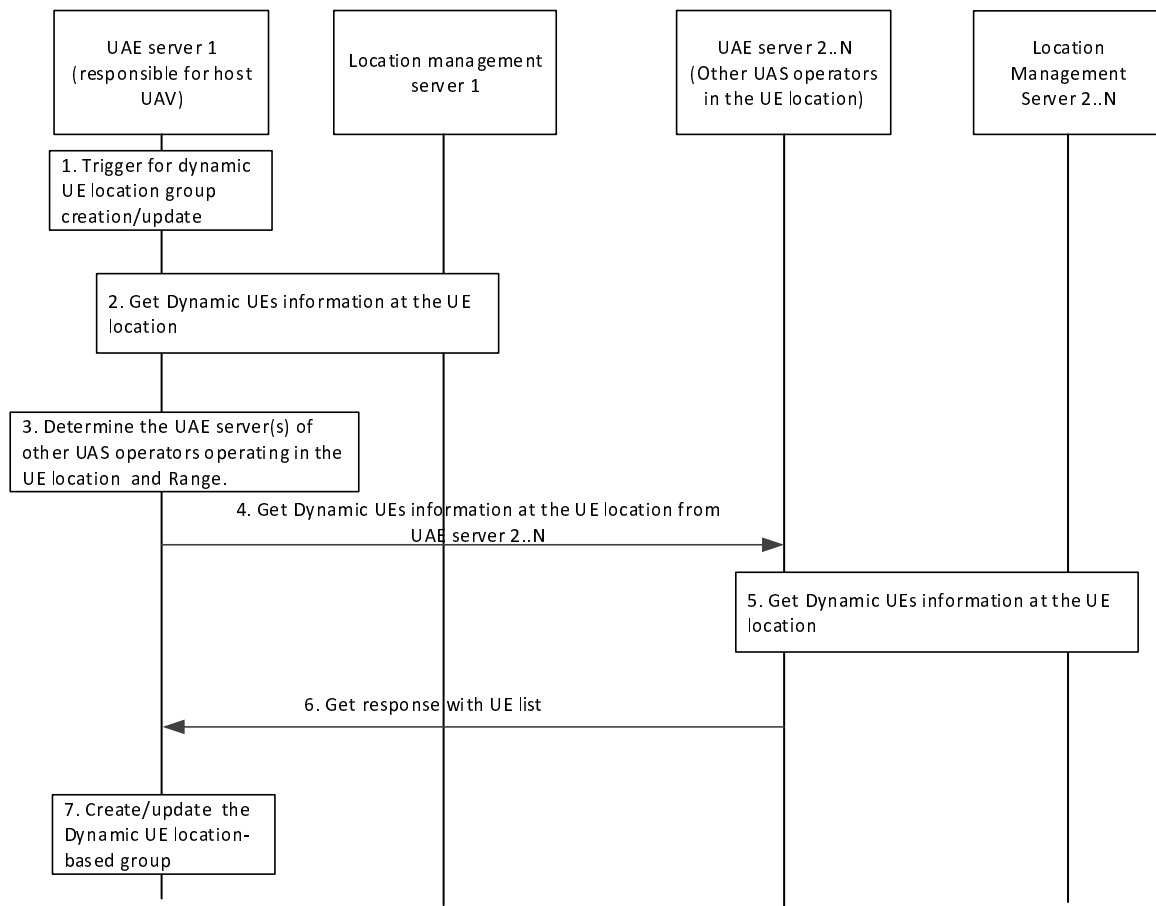


Figure 7.8.2.2-1: Management of dynamic UE location group

1. Dynamic UE location based group creation or update is triggered (e.g. notified of the UE location of host UAV) via the step 4 in clause 7.8.2.1 for the UAV ID of the host UAV.
2. UAE server 1 uses its associated LMS 1 to obtain the dynamic UE list and the corresponding location information in the proximity area of the host UAV by providing the application defined proximity range and the UE location of the host UAV as specified in clause 9.3.10 of 3GPP TS 23.434 [5].
3. UAE server 1 determines the list of other UAE servers 2..N operating in the same location.
4. For each UAE server determined in step 3, UAE server 1 requests the dynamic UE list and its corresponding location information for the application defined proximity range by providing the UE location of the host UAV.
5. The UAE server(s) 2..N obtain UE information corresponding to the UE location and application defined proximity range from its corresponding LMS 2..N as specified in 3GPP TS 23.434 [5].
6. The UAE server(s) 2..N sends get response with UE list in the UE location and application defined proximity range to UAE server 1.
7. If UAE server 1 has no dynamic UE location group for the UAV ID, the UAE server 1 creates a dynamic UE location based group with the UE list received from its LMS and other UAE server(s) 2..N. Further UAE server 1 stores the dynamic UE location based group. Otherwise, the UAE server 1 updates the dynamic UE location group with the latest UE information. The UAVs whose locations are no more within the application defined proximity range are removed from the dynamic UE location group.

7.8.2.3 Obtaining dynamic information of the UEs in application defined proximity range

7.8.2.3.1 Subscription procedure within UAS operator

Figure 7.8.2.3.1-1 describes the subscription procedure within UAS operator to obtain dynamic information from the UEs in application defined proximity range.

Pre-condition:

- UAE server 1 is tracking the host UAV and has created the dynamic UE location based group as per procedure in clause 7.8.2.2.

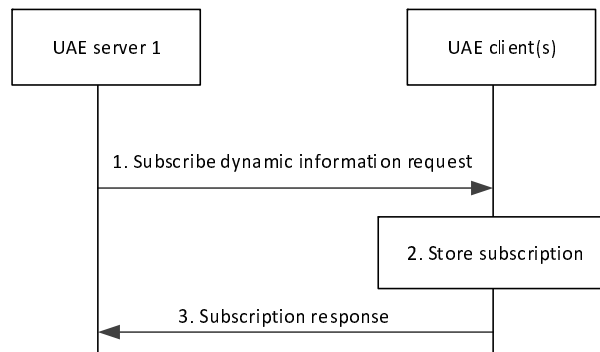


Figure 7.8.2.3.1-1: Subscription procedure within UAS operator

1. The UAE server 1 managing the dynamic UE location group sends subscribe dynamic information request to the UAE clients who are part of the dynamic UE location group. These UAE clients (UAVs) belong to the same UAS operator as the host UAV. The request consists of reporting configuration (e.g. frequency of reporting, event based).
2. The UAE client(s) store the subscription information.
3. The UAE client(s) send a subscription response to the UAE server 1.

7.8.2.3.2 Subscription procedure across UAS operators

Figure 7.8.2.3.2-1 describes the subscription procedure across UAS operators to obtain dynamic information from the UEs in application defined proximity range.

Pre-condition:

- UAE server 1 has created the dynamic UE location based group as per procedure in clause 7.8.2.2.

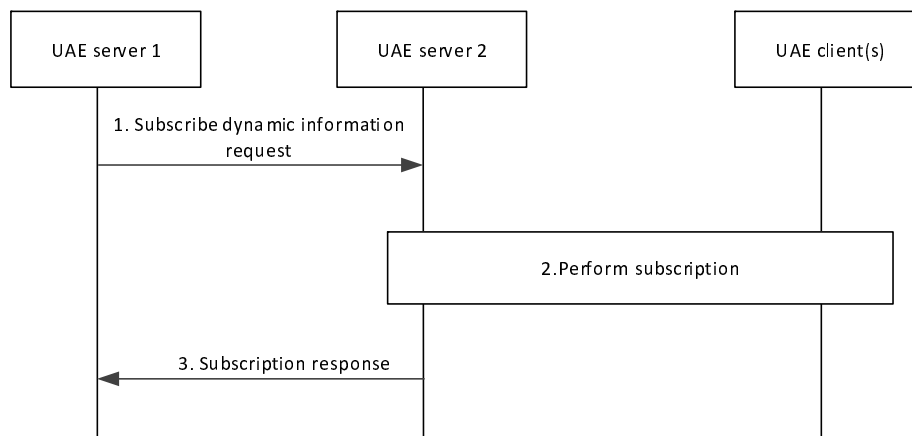


Figure 7.8.2.3.2-1: Subscription procedure across UAS operators

1. The UAE server 1 managing the dynamic UE location group sends subscribe dynamic information request to the UAE server(s) who's UAVs are part of the dynamic UE location group. The request consists of UAV IDs, reporting configuration (e.g. frequency of reporting, event based).
2. The UAE server 2 performs subscription procedure as specified in clause 7.8.2.3.1 with the UAE client(s).
3. The UAE server 2 sends a subscription response to the UAE server 1.

NOTE: UAE server 1 initiates this procedure with other UAE servers operating in the area.

7.8.2.3.3 Notification procedure

Figure 7.8.2.3.3-1 describes the notification procedure of dynamic information from the UEs in application defined proximity range.

Pre-condition:

- UAE server 2 has received the notification of dynamic information from its subscribed UAE client(s).

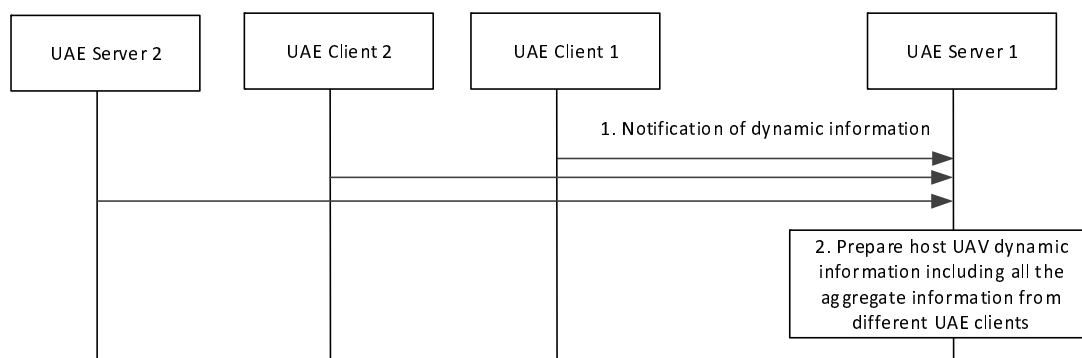


Figure 7.8.2.3.3-1: Notification procedure

1. As per subscription procedure in clause 7.8.2.3.1 and clause 7.8.2.3.2, the UAE client(s) and UAE server 2 (of another UAS operator) send notification of dynamic information to the UAE server 1. The notification includes the nearby UE information (e.g. UAVs), distance with nearby UEs, UEs location information.
2. The UAE server 1 aggregates information from different UAE clients to create the host UAV dynamic information.

7.8.2.4 Notification of host UAV dynamic information

Pre-conditions:

- UAS Application Specific Server has performed subscription as per procedure in clause 7.8.2.1 with UAE server 1.
- UAE server 1 has prepared the host UAV dynamic information as per procedure in clause 7.8.2.3.3.

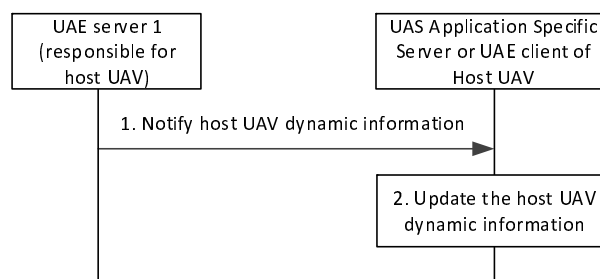


Figure 7.8.2.4-1: Notification for host UAV dynamic information

1. The UAE server 1 sends notification of host UAV dynamic information to the subscribed entity (i.e. UAS Application Specific Server and/or to the subscribed UAE client of the host UAV). The notification includes the

aggregated information of all the UEs in the application defined proximity range of the host UAV and the location of the host UAV.

2. The UAS Application Specific Server or the UAE client of the host UAV updates the host UAV dynamic information with the host UAV dynamic information received in step 1. The UAE client provides the host UAV dynamic information to the UAS Client.

7.8.2.5 Unsubscription for host UAV dynamic information

Figure 7.8.2.5-1 describes the procedure for unsubscription for host UAV's dynamic information.

Pre-condition:

- The UAS Application Specific Server or UAE client of the host UAV have performed the subscription procedure as specified in clause 7.8.2.1

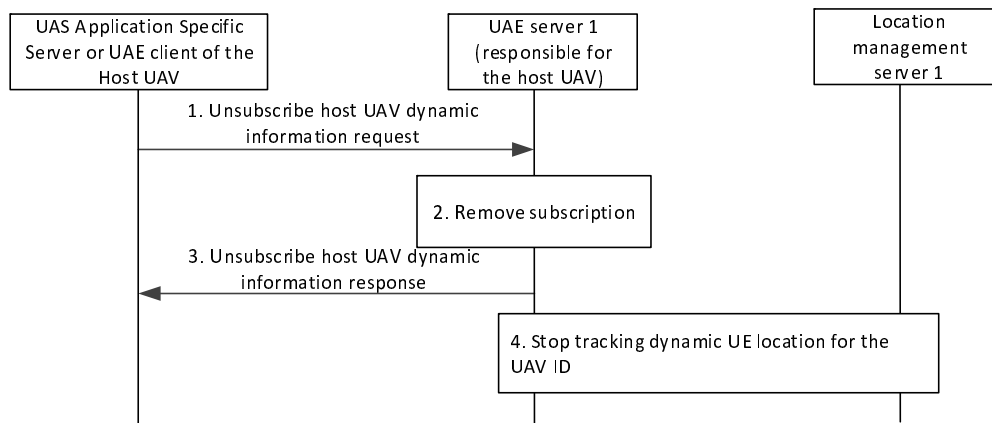


Figure 7.8.2.5-1: Unsubscription for host UAV dynamic information

1. The UAS Application Specific Server or UAE client of host UAV sends a unsubscribe host UAV dynamic information request to the UAE server 1. The request includes subscription ID.
2. The UAE server 1 removes the previously stored subscription information.
3. The UAE server 1 sends unsubscription response to the UAS Application Specific Server.
4. The UAE server 1 stops tracking the host UAV location from the location management server 1 as specified in 3GPP TS 23.434 [5].

7.8.3 Information flows

7.8.3.1 Subscribe host UAV dynamic information request

Table 7.8.3.1-1 describes the information flow for a UAS application specific server to subscribe to host UAV dynamic information at the UAE server.

Table 7.8.3.1-1: Subscribe host UAV dynamic information request

Information element	Status	Description
UAV ID	M	Identifier of the host UAV.
Application defined proximity range information	M	Description of the range information over which the host UAV's dynamic information is required.

7.8.3.2 Subscribe host UAV dynamic information response

Table 7.8.3.2-1 describes the information flow for UAE server to respond for host UAV dynamic subscription request from the UAS application specific server.

Table 7.8.3.2-1: Subscribe host UAV dynamic information response

Information element	Status	Description
Result	M	Result from the UAE server in response to subscription request indicating success or failure
Subscription ID (NOTE)	O	Identifier of a successful subscription.
NOTE: This IE is included when the Result indicates success		

7.8.3.3 Notify Host UAV dynamic information

Table 7.8.3.3-1 describes the information flow for a UAS application specific server to receive notification about Host UAV dynamic information from the UAE server.

Table 7.8.3.3-1: Notify Host UAV dynamic information

Information element	Status	Description
Subscription ID	M	Identifier of the subscription for this notification.
Location of the host UAV	M	The location of the host UAV during the Host UAV dynamic information subscription.
List of UAVs information	M	The information of the UAVs which were detected in the application defined proximity range.
>Nearby UAV ID	M	The identifier of nearby UAS
>Location information	M	Location information of the nearby UAV within the application defined proximity range
>Distance information	M	Distance information of the nearby UAV, relative to the host UAV.

7.8.3.4 Notification of dynamic information

Table 7.8.3.4-1 describes the information flow for notification of dynamic information from UAE client to the UAE server.

Table 7.8.3.4-1: Notification of dynamic information

Information element	Status	Description
Subscription ID	M	Identifier of the subscription for this notification.
List of UAVs information	M	The information of the UAVs which were detected in the proximity area of the reporting UAV.
>Nearby UAV ID	M	The identifier of nearby UAV
>Local dynamic information	M	The local dynamic information of the nearby UAV (e.g. location)

7.8.3.5 Unsubscribe host UAV dynamic information request

Table 7.8.3.5-1 describes the information flow for a UAS application specific server to unsubscribe the host UAV dynamic information at the UAE server.

Table 7.8.3.5-1: Unsubscribe host UAV dynamic information request

Information element	Status	Description
Subscription ID (NOTE)	M	Identifier of a successful subscription.

7.8.3.6 Unsubscribe host UAV dynamic information response

Table 7.8.3.6-1 describes the information flow for UAE server to respond for host UAV dynamic unsubscription request from the UAS application specific server.

Table 7.8.3.6-1: Unsubscribe host UAV dynamic information response

Information element	Status	Description
Result	M	Result from the UAE server in response to unsubscription request indicating success or failure

7.9 Support of real time UAV flight path monitoring assistance

7.9.1 General

This feature introduces the UAS application enablement services for support of real time UAV flight path monitoring assistance. In particular, the UAE layer provides support for the following operations:

- Support of the registration of the UAE clients real time UAV flight path monitoring assistance capability to the UAE server as described in clause 7.1a.
- Support the real time flight path monitoring assistance procedure from the UAS application specific server to the UAE server and the UAE client, as described in clause 7.9.2.1 and clause 7.9.2.2.
- Support of the real time flight path reporting procedure from the UAE client to the UAS application specific server, as described in clause 7.9.2.3.

7.9.2 Procedures


7.9.2.1 Real time UAV flight path monitoring assistance procedure

This procedure manages the real time UAV flight path monitoring assistance at the UAE server, based on an application request from the UAS application specific server to perform real time UAV flight path monitoring assistance.

Figure 7.9.2.1-1 illustrates the procedure where the UAE server receives a request from the UAS application specific server (e.g., USS) to perform real time UAV flight path monitoring assistance.

Pre-condition:

- The UAE client has indicated support of real time UAV flight path monitoring assistance capability.
- The UAV has received its UAS ID from the UAS application specific server.
- The UAV has performed the UAS UE registration procedure.

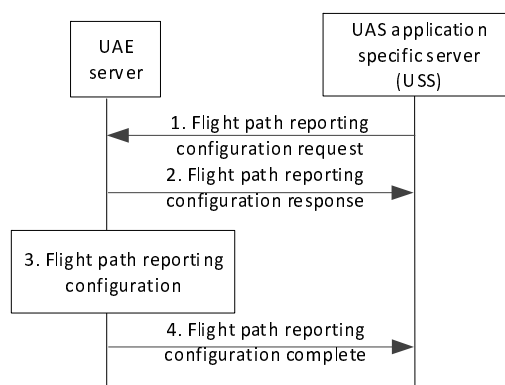**Figure 7.9.2.1-1: Real time flight path monitoring assistance procedure**

1. The UAE server receives a Flight path reporting configuration request from the UAS application specific server including QoS and QoE related triggering events (QoS thresholds, QoE thresholds, periodicity to collect QoS and QoE information), validity scope (flight path waypoints and/or geographical area, time). The QoS and QoE related triggering events can be provided separately for Uu and for PC5.

2. The UAE server sends to the UAS application specific server a Flight path reporting configuration response with a positive or negative acknowledgement of the request, based on capabilities of the UAE server to undertake the task.
3. The UAE server executes the flight path reporting configuration of the UAE client by sending a configuration request to the UAE client as indicated in Figure 7.9.2.2-1, including the UAV identifier, and the configuration parameters received in step 1.
4. After successful execution of the flight path reporting configuration, the UAE server notifies the UAS application specific server with a Flight path reporting configuration complete.

7.9.2.2 Real time flight path monitoring assistance configuration of UAE Client

This procedure enables the real time flight path monitoring assistance configuration of the UAE client, based on a request from UAS application specific server.

Figure 7.9.2.2-1 illustrates the procedure that enables configuration of the real time flight path monitoring assistance of the UAE Client.

Pre-conditions:

- The UAS UE is connected to 5GS and authenticated and authorized by UAS application specific server as specified in clause 5.2 of 3GPP TS 23.256 [4].
- The UAE server has established a UAE session with the UAE client as the UAE client is successfully registered to the UAE server.
- The UAE server has performed the real time UAV flight path monitoring assistance procedure according to clause 7.9.2.1.

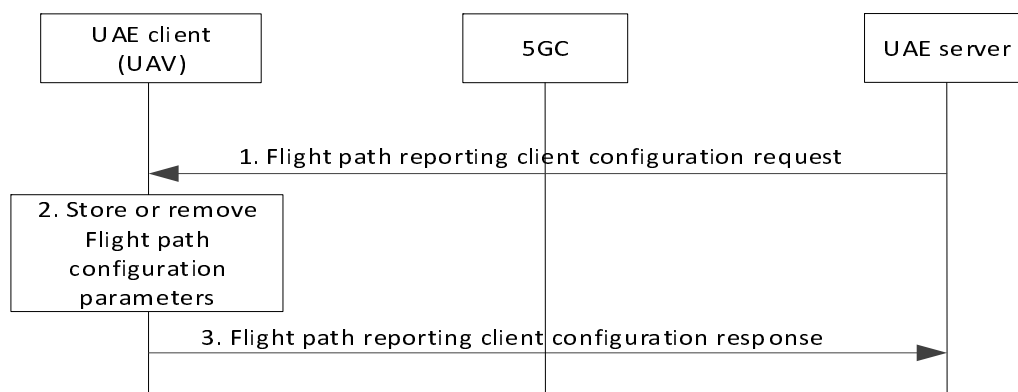


Figure 7.9.2.2-1: Real time flight path monitoring assistance configuration of UAE Client

1. The UAE server sends to the UAE client a Flight path reporting client configuration request including the UAS identifier, including QoS and QoE related triggering events (QoS thresholds, QoE thresholds, periodicity to collect QoS and QoE information), validity scope (flight path waypoints and/or geographical area, time). In case of complete removal of the flight path event, the request shall only include the UAS identifier.
2. The UAE client updates the flight path configuration as per the information received in step 1.
3. The UAE client sends to the UAE Server a Flight path reporting client configuration response.

7.9.2.3 Real time flight path reporting procedure

This procedure illustrates the procedure where the UAE client processes the flight path event reporting received from a UAE server and sends to the UAS application specific server. The UAE server can provide flight path reports including associated UAV location information as the UAE server is informed by the UAE client, or in consolidated flight path report(s).

Figure 7.9.2.3-1 illustrates the procedure that reports real time flight path information from the UAE Client.

Pre-conditions:

- The UAE client has indicated support of real time UAV flight path monitoring assistance capability.
- The UAS application specific server has provided the real time UAV flight path monitoring assistance configuration to the UAE client.

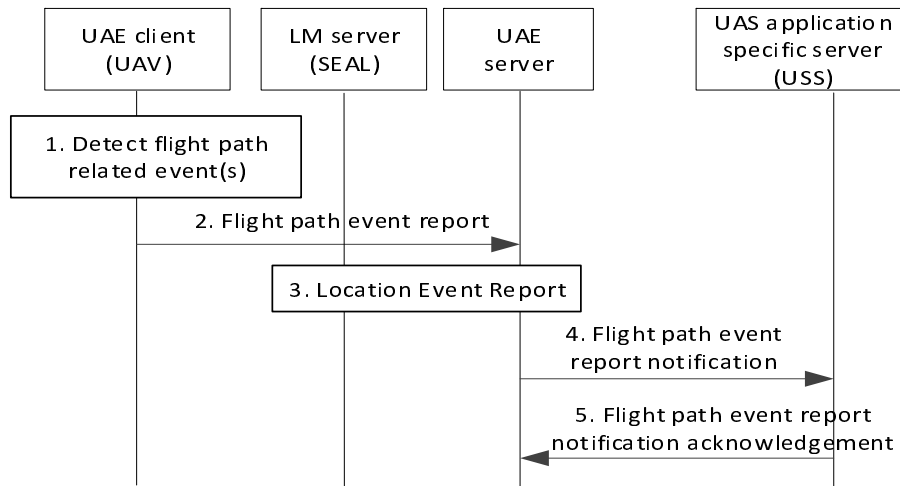


Figure 7.9.2.3-1: Real time flight path reporting procedure

1. The UAE client detects event(s) for Uu or PC5 based on application layer experienced rules and thresholds as indicated from the flight path reporting configuration outlined in Figure 7.9.2.2-1, QoS thresholds, QoE thresholds, periodicity to collect QoS and QoE information, validity scope (flight path waypoints and/or geographical area, time).
2. The UAE client sends to the UAE server a Flight path event report including detected event(s) (e.g., low/high QoS and/or QoE). The UAE server records the event(s) with current timestamp.
3. The UAE server requests UAE client current location information from the SEAL location services. The UAE server records the received location information with current timestamp.
4. The UAE server sends to the UAS application specific server a Flight path event report notification. Based on the flight path reporting configuration, the UAE server may send the flight path information with location report information to the UAS application specific server when received, periodically or when the session with the UAE client end (e.g., when flight mission completes).
5. The UAS application specific server confirms with a Flight path event report notification acknowledgement to the UAE server.

7.9.3 Information flows

7.9.3.1 Flight path reporting configuration request

Table 7.9.3.1-1 describes the flight path reporting configuration request from the UAS application specific server to the UAE server.

Table 7.9.3.1-1: Flight path reporting configuration request

Information element	Status	Description
UASS ID	M	Identity of the UAS application specific server which requests the flight path reporting configuration. This ID can be the USS identifier, when the UAS application specific server is the USS.
UAS ID	M	The identification of the UAS for which the Flight path reporting configuration request applies. This could be in form of identifier for the UAS, e.g group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI
Parameters for Uu / PC5	O	Parameters for Uu and PC5
> QoS parameters	O	Parameters for flight path reporting configuration related with QoS (e.g., jitter, latency, throughput, error rate, packet loss). - QoS thresholds - QoS periodicity
> QoE parameters	O	Parameters for flight path reporting configuration related with QoE (e.g., distance and time deviation relative to the planned flight path). - QoE thresholds - QoE periodicity
> Time validity	O	Time validity where the flight path client configuration applies.
> List of waypoints	O	One or more waypoints along the flight path where the flight path client configuration applies.
> Geographical area	O	The area where the flight path client configuration applies. This can be geographical area, or topological area.
> Reporting frequency	O	Indication on how often the UAS application specific server would like to be reported. This can be event based and / or time based.
Parameters for PC5	O	Parameters for PC5. If this set is provided, the above parameters "Parameters for Uu / PC5" is only for Uu.
> QoS parameters	O	Parameters for flight path reporting configuration related with QoS (e.g., jitter, latency, throughput, error rate, packet loss). - QoS thresholds - QoS periodicity
> QoE parameters	O	Parameters for flight path reporting configuration related with QoE (e.g., distance and time deviation relative to the planned flight path). - QoE thresholds - QoE periodicity
> Time validity	O	Time validity where the flight path client configuration applies.
> List of waypoints	O	One or more waypoints along the flight path where the flight path client configuration applies.
> Geographical area	O	The area where the flight path client configuration applies. This can be geographical area, or topological area.
> Reporting frequency	O	Indication on how often the UAS application specific server would like to be reported. This can be event based and / or time based.
NOTE: If no flight path reporting configuration information is included, it indicates removal of a previously provided flight path reporting client configuration.		

7.9.3.2 Flight path reporting configuration response

Table 7.9.3.2-1 describes the flight path reporting configuration response from the UAE server to the UAS application specific server.

Table 7.9.3.2-1: Flight path reporting configuration response

Information element	Status	Description
Result	M	The positive or negative result of the flight path reporting configuration request.

7.9.3.3 Flight path reporting configuration complete

Table 7.9.3.3-1 describes the information flow Flight path reporting configuration complete from the UAE server to the UAS application specific server.

Table 7.9.3.3-1: Flight path reporting configuration complete

Information element	Status	Description
Result	M	The positive or negative result of the flight path reporting configuration.

7.9.3.4 Flight path reporting client configuration request

Table 7.9.3.4-1 describes the information flow flight path reporting client configuration request from the UAE server to the UAE client.

Table 7.9.3.4-1: Flight path reporting client configuration request

Information element	Status	Description
UAS ID	M	The identification of the UAS for which the flight path reporting client configuration request applies. This could be in form of identifier for the UAS, e.g. group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI.
Parameters for Uu / PC5	O	Parameters for Uu and PC5
> QoS parameters	O	Parameters for flight path reporting configuration related with QoS (e.g., jitter, latency, throughput, error rate, packet loss). - QoS thresholds - QoS periodicity
> QoE parameters	O	Parameters for flight path reporting configuration related with QoE (e.g., distance and time deviation relative to the planned flight path). - QoE thresholds - QoE periodicity
> Time validity	O	Time validity where the flight path client configuration applies.
> List of waypoints	O	One or more waypoints along the flight path where the flight path client configuration applies.
> Geographical area	O	The area where the flight path client configuration applies. This can be geographical area, or topological area.
> Reporting frequency	O	Indication on how often the UAE server would like to be reported. This can be event based and / or time based.
Parameters for PC5	O	Parameters for PC5. If this set is provided, the above parameters "Parameters for Uu / PC5" is only for Uu.
> QoS parameters	O	Parameters for flight path reporting configuration related with QoS (e.g., jitter, latency, throughput, error rate, packet loss). - QoS thresholds - QoS periodicity
> QoE parameters	O	Parameters for flight path reporting configuration related with QoE (e.g., distance and time deviation relative to the planned flight path). - QoE thresholds - QoE periodicity
> Time validity	O	Time validity where the flight path client configuration applies.
> List of waypoints	O	One or more waypoints along the flight path where the flight path client configuration applies.
> Geographical area	O	The area where the flight path client configuration applies. This can be geographical area, or topological area.
> Reporting frequency	O	Indication on how often the UAE server would like to be reported. This can be event based and / or time based.
NOTE: If no flight path reporting client configuration information is included, it indicates removal of a previously provided flight path reporting client configuration.		

7.9.3.5 Flight path reporting client configuration response

Table 7.9.3.5-1 describes the information flow flight path reporting client configuration response from the UAE client to the UAE server.

Table 7.9.3.5-1: Flight path reporting client configuration response

Information element	Status	Description
Result	M	The positive or negative result of the flight path reporting client configuration

7.9.3.6 Flight path event report

Table 7.9.3.6-1 describes the information flow flight path event report from the UAE client to the UAE server.

Table 7.9.3.6-1: Flight path event report

Information element	Status	Description
Report	M	Indication of event-based, periodic or final flight part event report
> QoS event	O	Indication of QoS event(s).
> QoE event	O	Indication of QoE event(s).
> Waypoint event	O	Indication of waypoint event(s).
> Geographical event	O	Indication of geographical event(s).
> QoS event for PC5	O	Indication of QoS event(s).
> QoE event for PC5	O	Indication of QoE event(s).
> Waypoint event for PC5	O	Indication of waypoint event(s).
> Geographical event for PC5	O	Indication of geographical event(s).
NOTE: Zero, one or more of each of the events may be provided for Uu and/or PC5. If separate parameters for PC5 are provided, then separate events for PC5 are provided.		

7.9.3.7 Flight path event report notification

Table 7.9.3.7-1 describes the information flow flight path event report notification from the UAE server to the UAS application specific server.

Table 7.9.3.7-1: Flight path event report notification

Information element	Status	Description
Report	M	Indication of event-based, periodic or final flight part event report
> QoS event	O	Indication of QoS event(s).
> QoE event	O	Indication of QoE event(s).
> Waypoint event	O	Indication of waypoint event(s).
> Geographical event	O	Indication of geographical event(s).
> Time	O	Time of reception of the report(s) from the UAE client
> Location	O	Location of the UAE client when the report(s) from the UAE client was received by the UAE server
> QoS event for PC5	O	Indication of QoS event(s).
> QoE event for PC5	O	Indication of QoE event(s).
> Waypoint event for PC5	O	Indication of waypoint event(s).
> Geographical event for PC5	O	Indication of geographical event(s).
> Time for event for PC5	O	Time of reception of the report(s) from the UAE client
> Location of event for PC5	O	Location of the UAE client when the report(s) from the UAE client was received by the UAE server
NOTE: Zero, one or more of each of the events may be provided for Uu and/or PC5. If separate parameters for PC5 are provided, then separate events for PC5 are provided.		

7.10 UAS provided flight routes

7.10.1 General

This feature enables the UAE server to provide possible flight path based on specific QoS requested from UTM or UAV. In particular, the UAE layer provides support for the flight route selection.

7.10.2 Procedures

7.10.2.1 Flight route support

Figure 7.10.2.1-1 describes the flight route support procedure.

Pre-conditions:

- UAV has performed the UAS UE registration procedure.

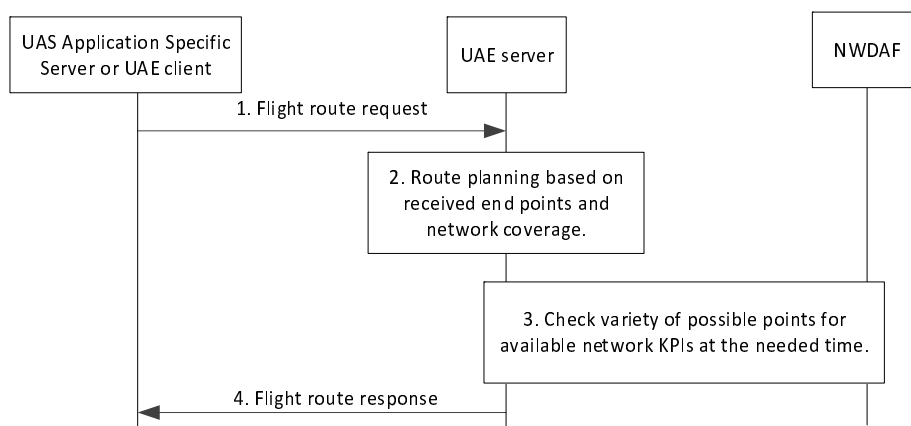


Figure 7.10.2.1-1: Flight route calculation procedure

1. The UAS application specific server or UAE client (UAV or UAV-C) sends flight route request towards the UAE server. This request contains network parameters needed for the specific needs of the specific use case (start point, destination point, specific times of start point and end point, needed QoS, link reliability, shortest route needed, etc).
2. The UAE server has the role of a route planning unit and based on the received end points and provisioned information (e.g., restricted areas, existing flight paths, available base stations coverage, shortest distance, shortest time duration) calculates possible waypoints as geographical coordinates and specific times.
3. The UAE server checks with NWDAF (via NEF) the QoS sustainability analytics (clause 6.9 of 3GPP TS 23.288 [15]) in these areas of interest/waypoints identified in step 2. Location information towards the NWDAF is presented as area of interest or path of interest and can reflect a list of waypoints. Based on the received information from NWDAF the UAE server selects waypoints (geographical coordinates and time) which KPIs map the requested criteria in step1.
4. The UAE server sends flight route reply with the selected waypoints in step 3 to the entity which has send the request (UTM, UAV or UAV-C).

7.10.3 Information flows

7.10.3.1 Flight route request

Table 7.10.3.1-1 describes the information flow for the UAS application specific server or UAE client to request flight route from the UAE server.

Table 7.10.3.1-1: Flight route request

Information element	Status	Description
UASS ID	M	Identity of the UAS application specific server which requests the flight route. This ID can be the USS identifier, when the UAS application specific server is the USS.
UAV ID	M	The identifier of the UAV/UAV-C (e.g. 3GPP UE ID or CAA level UAV ID) which requests the flight route.
Start point	M	Geographical coordinates of starting point
Start time	M	Time on which the UAV is at the starting point
Destination point	M	Geographical coordinates of destination point
Destination time	M	Time on which the UAV is at the destination point
Required minimum QoS	M	The needed QoS to support the flight mission.
Service availability	O	Percentage of needed service availability
Shortest route indicator	O	Indicator for a need of shortest route

7.10.3.2 Flight route reply

Table 7.10.3.2-1 describes the information flow for the UAS application specific server to reply with flight route the UAS application specific server or UAE client.

Table 7.10.3.2-1: Flight route response

Information element	Status	Description
Result	M	Result from the UAE server in response to flight route request indicating success or failure
List of waypoints (NOTE)	O	List of waypoints containing geographical coordinates and time for each waypoint
NOTE: If Result IE indicates success, then List of waypoints IE provided by UAE server is present		

7.11 UAE layer support for NTZ

7.11.1 General

This feature enables the UAS application enablement services for assisting the UAS application with NTZ handling. The UAE layer provides support for the following operations:

- Support the management of NTZ between the UAS application specific server and UAE server as described in 7.11.2.1.
- Support the distribution of the NTZ application policy from UAS application specific server to the UAE server and the UAE client as described in clause 7.11.2.1 and 7.11.2.2.
- Support for informing the UAE server and UAS application specific server about NTZ status changes at the UAV as described in clause 7.11.2.3.
- Support the UAE layer assisted NTZ as described in clause 7.11.2.4.
- Support the UAE client in obtaining new NTZ information after changing USS as described in clause 7.11.2.5.

7.11.2 Procedures

7.11.2.1 Management of NTZ support configuration

Figure 7.y.2.1-1 illustrates the NTZ support management procedure where the UAE server receives an application request for managing the NTZ application policy from the UAS application specific server.

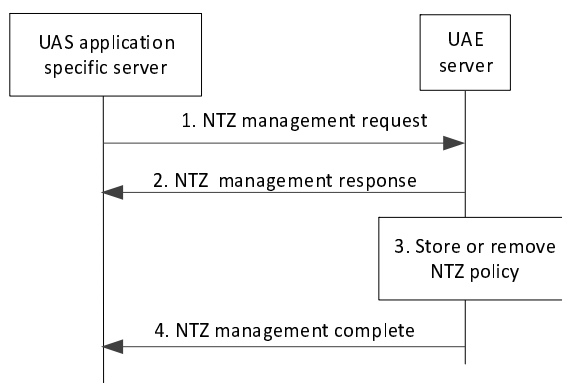


Figure 7.11.2.1-1: NTZ support management procedure

1. The UAS application specific server sends to the UAE server a NTZ management request. The request includes the UASS identifier and the NTZ policy management container. If NTZ policy container is provided, the request shall include area for deactivating transmission, information about frequency bands and reporting configuration.
2. The UAE Server sends to the UAS application specific server a NTZ management response with a positive or negative acknowledgement of the request, based on capability of UAE server to undertake this task.
3. UAE server executes NTZ configuration according to clause 7.11.2.2.
4. After execution of NTZ configuration, the UAE server notifies the UAS application specific server with a NTZ management complete.

7.11.2.2 NTZ configuration

This procedure enables the configuration of the UAE Client, based on an application request from UAS application specific server (which can be the USS/UTM) to manage the NTZ for a UAS.

Figure 7.11.2.2-1 illustrates the NTZ configuration procedure.

Pre-conditions:

1. The UAS UEs are connected to 5GS and authenticated and authorized by UAS application specific server as specified in clause 5.2 of 3GPP TS 23.256 [4].
2. UAE Server has established a UAE session with the respective UAE clients as the UAE clients are successfully registered to the UAE server.
3. UAE Server has performed the NTZ management as in clause 7.11.2.1.

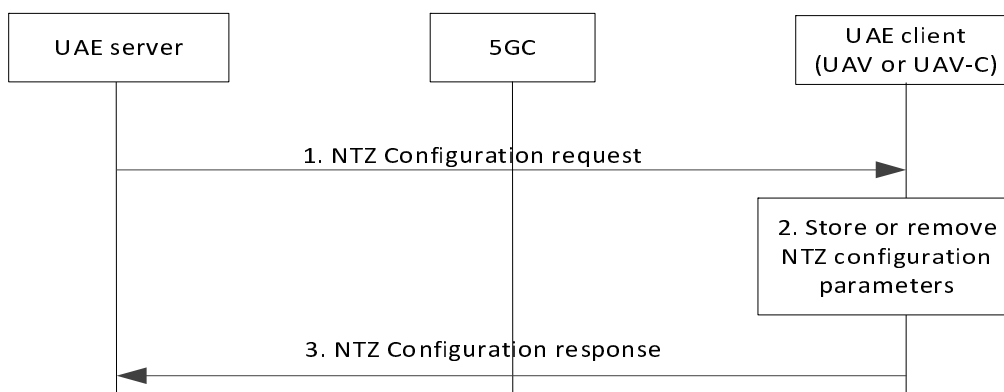


Figure 7.11.2.2-1: NTZ configuration

1. The UAE Server sends a NTZ configuration request including the UAS identifier. If the NTZ configuration is provided, the request shall include the area for deactivating transmission, frequency bands and reporting configuration. The UAE server configures all UAS UEs registered in the UAE server.
2. The UAE Client stores or removes the NTZ configuration parameters as per the information received in step 1.
3. The UAE Client sends a NTZ configuration response to the UAE Server.

7.11.2.3 NTZ activation by UAE Client

This procedure provides a mechanism for the UAE client to deactivate and activate its radio transmission in the respective frequency bands when entering or leaving the NTZ area based on the NTZ configuration as described in clause 7.11.2.2.

Figure 7.11.2.3-1 illustrates the NTZ activation.

Pre-conditions:

1. The UAE Clients are configured with a NTZ configuration as described in clause 7.11.2.2.
2. UAE Server has performed the NTZ management, as described in clause 7.11.2.1.

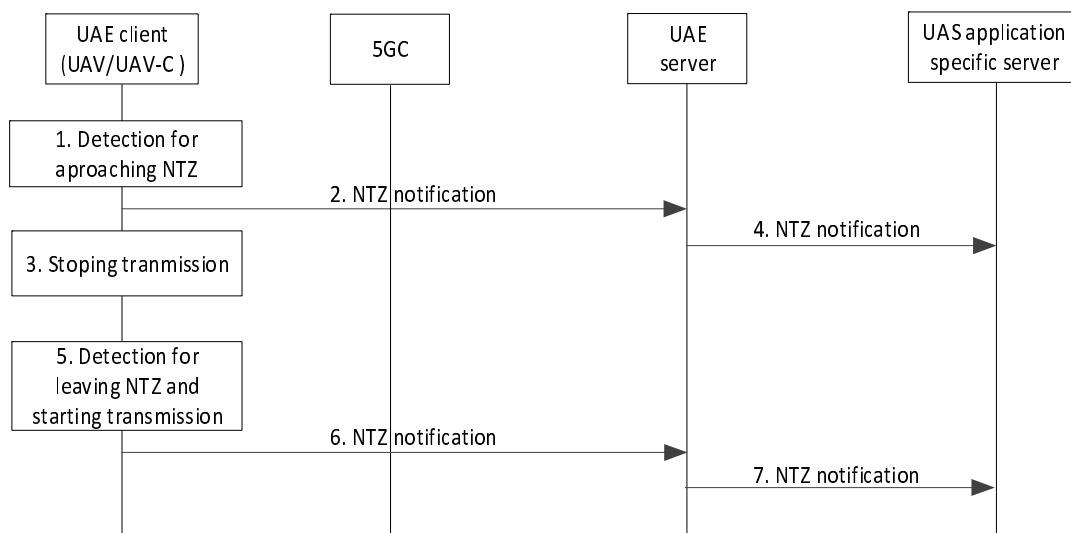


Figure 7.11.2.3-1: NTZ activation

1. UAE Clients (UAV and UAV-C) detect approaching area for deactivating transmission based on their NTZ configuration. Upon entering the NTZ area, the UAE client can switch to another frequency band or entirely stop its transmission depending on its available functionality and NTZ configuration.
2. The UAE Client sends a NTZ notification to the UAE Server indicating "NTZ imminent entry" and the time for switching off the needed frequency band and its location.
3. The UE clients stop its transmission.
4. The UAE Server forwards the NTZ notification to the UAS application specific server. It contains the UAS identity, the time for switching transmission off and location information of the UAS.
5. The UAE client detects it is out of the area for deactivating transmission and starts transmission.
6. The UAE client sends a NTZ notification to the UAE server indicating "NTZ exit" and the time for switching on the respective frequency band and its location.

7. The UAE Server forwards the NTZ notification to the UAS application specific server. It contains the UAS identity, the specific time when the transmission has been switched on and location information of the UAS.
8. In case that the UAE client has changed its USS according to clause 7.6 then:
9. UAE client requests new USS NTZ policy from the UAE server.
10. The UAE server replies with the new USS NTZ policy.

7.11.2.4 UAE-layer/SEAL/LMS assisted NTZ enforcement

This procedure provides a mechanism for supporting NTZ activation and deactivation based on usage of existing SEAL/LMS functionality for monitoring location deviation specified in clause 9.3.11 of 3GPP TS 23.434 [5]. The responsibility of following the NTZ policy is in UAV/UAV-C.

Figure 7.11.2.4-1 illustrates the procedure where the UAE server and SEAL/LMS support the assisted NTZ enforcement.

Pre-conditions:

1. UAE Server has performed the NTZ management, as described in clause 7.11.2.1.
2. UAE Server has subscribed for using SEAL/LMS services.
3. UAE Server has established a UAE session with the respective UAE clients as the UAE clients are successfully registered to the UAE server.

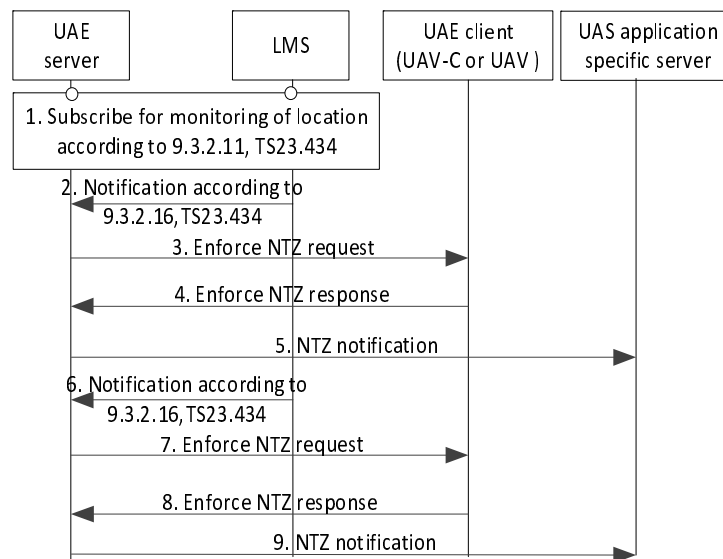


Figure 7.11.2.4-1: UAE-layer/LMS assisted NTZ enforcement

1. The UAE server subscribes for monitoring of location deviation according to clause 9.3.2.11 of 3GPP TS 23.434 [5] using the identities of the UAE client successfully registered to the UAE server. The area of interest is the geographical area in which the no-transmit zone is active.
2. If one or more of the monitored UAE clients enter the area of interest, the LMS sends location area monitoring notification according to clause 9.3.2.16 of 3GPP TS 23.434 [5] containing the UAE client identifiers.
3. The UAE Server sends enforce NTZ request to the identified UAE clients entering the area of interest, indicating to stop transmission and containing information about the NTZ (area for deactivating the transmission, frequency bands, altitude). It is up to UAE client and UAV to switch its transmission on the specified NTZ frequency.
4. The UAE clients send enforce NTZ response to the UAE server indicating positive or negative result of the received request.

5. The UAE server sends NTZ notification towards the UAS application specific server. It contains the UAS identity, the specific time when the transmission has been switched off and location information of the UAS.
6. If one or more of the monitored UAE clients leaves the area of interest, the LMS sends location area monitoring notification according to clause 9.3.2.16 of 3GPP TS 23.434 [5] containing the UAE client identifiers.
7. The UAE Server sends enforce NTZ request to the identified UAE clients leaving the area of interest, indicating to start transmission.
8. The UAE clients send enforce NTZ response to the UAE server indicating positive or negative result of the received request.
9. The UAE server sends NTZ notification towards the UAS application specific server. It contains the UAS identity, the specific time when the transmission has been switched on and location information of the UAS.

7.11.2.5 New USS NTZ policy

This procedure provides a mechanism for the UAE client to request a new NTZ policy when a change of USS happens.

Figure 7.11.2.5-1 illustrates the new NTZ policy.

Pre-conditions:

1. The UAE Clients are configured with a NTZ configuration as described in clause 7.11.2.2.
2. UAE Server has performed the NTZ management, as described in clause 7.11.2.1.

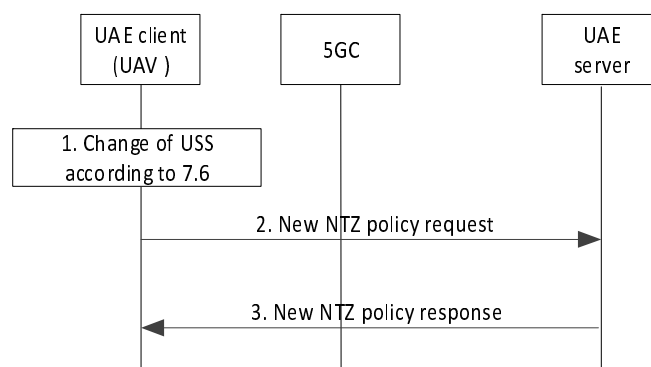


Figure 7.11.2.5-1: New NTZ policy

1. The UAE client has changed its USS according to the procedures described under clause 7.6.
2. UAE client requests new NTZ policy from the UAE server.
3. The UAE server replies with the new NTZ policy.

7.11.3 Information flows

7.11.3.1 NTZ management request

Table 7.11.3.1-1 describes the information flow NTZ management request from the UAS application specific server to the UAE server.

Table 7.11.3.1-1: NTZ management request

Information element	Status	Description
UASS ID	M	Identity of the UAS application specific server which requests the NTZ management. This ID can be the USS identifier, when the UAS application specific server is the USS.
NTZ policy management container (see NOTE)	O	The NTZ policy management container consists of the requirements and policy for NTZ management.
> Area for deactivating transmission	M	The area where the NTZ management request applies. This can be geographical area, or topological area in which the no-transmit zone is active including specific altitude (e.g., ceiling and floor altitude).
> List of restricted frequency bands	M	The list of frequency bands not allowed to be used in the NTZ.
>> Time period	O	The time period when the NTZ is valid for the frequency band.
>> Frequency band	M	The information for a frequency band not allowed to be used in the NTZ.
>> RAT type	M	The information for the RAT associated with the frequency band.
>Reporting configuration	M	The NTZ reporting configuration of the the UE, including the required reporting (e.g., prior to entering or after exiting or both) and the time interval for reporting.
NOTE: If NTZ policy management container is not included, it indicates removal of the NTZ policy management related information.		

7.11.3.2 NTZ management response

Table 7.11.3.2-1 describes the information flow NTZ management response from the UAE server to the UAS application specific server.

Table 7.11.3.2-1: NTZ management response

Information element	Status	Description
Result	M	The positive or negative result of the NTZ management request.

7.11.3.3 NTZ management complete

Table 7.11.3.3-1 describes the information flow NTZ management complete from the UAE server to the UAS application specific server.

Table 7.11.3.2-1: NTZ management complete

Information element	Status	Description
Result	M	The positive or negative result of the NTZ configuration.

7.11.3.4 NTZ configuration request

Table 7.11.3.4-1 describes the information flow NTZ configuration request from the UAE server to the UAE client.

Table 7.11.3.4-1: NTZ configuration request

Information element	Status	Description
UAS ID	M	The identification of the UAS for which the NTZ configuration request applies. This could be in form of identifier for the UAS, e.g. group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI.
NTZ configuration (see NOTE)	O	NTZ configuration information to be configured at the UAS
> Area for deactivating transmission	M	The area where the NTZ management request applies. This can be geographical area, or topological area in which the no-transmit zone is active including specific altitude (e.g., ceiling and floor altitude).
> List of restricted frequency bands	M	The list of frequency bands not allowed to be used in the NTZ.
>> Time period	O	The time period when the NTZ is valid for the frequency band.
>> Frequency band	M	The information for a frequency band not allowed to be used in the no-transmit zone.
>> RAT type	M	The information for the RAT associated with the frequency band.
>Reporting configuration	M	The NTZ reporting configuration of the UE, including the required reporting (e.g., prior to entering or after exiting or both) and the time interval for reporting.
NOTE: If NTZ configuration IE is not included, it indicates removal of the NTZ configuration at the UAS ID.		

7.11.3.5 NTZ configuration response

Table 7.11.3.5-1 describes the information flow NTZ configuration response from the UAE client to the UAE server.

Table 7.11.3.5-1: NTZ configuration response

Information element	Status	Description
Result	M	The positive or negative result of reception and storing or removal of the NTZ configuration parameters

7.11.3.6 NTZ notification

Table 7.11.3.6-1 describes the information flow NTZ notification.

Table 7.11.3.6-1: NTZ notification

Information element	Status	Description
UAS ID	M	The identification of the UAS. This could be in form of identifier for the UAS, e.g. group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI.
NTZ status	M	The status of the NTZ enforcement; the status can be "NTZ imminent entry" or "NTZ exit".
NTZ Transmission information	M	Indication for the transmission change; the information indicates whether the transmission is switched on or off and includes the frequency band information.
Time	M	The specific time when the notification is sent.
Location information	M	Location and altitude of the UAE client when the notification is sent.
NTZ enforcement time	O	The information about the NTZ enforcement time.
> estimated start time (NOTE 1)	O	The time the NTZ enforcement is expected to start.
> estimated completion time (NOTE 1)	O	The time the NTZ enforcement is expected to end.
> actual completion time (NOTE 2)	O	The time the NTZ enforcement completed.
NOTE 1: Mandatory if the NTZ status is for "NTZ imminent entry".		
NOTE 2: Mandatory if the NTZ status is for "NTZ exit".		

7.11.3.7 New NTZ policy request

Table 7.11.3.7-1 describes the information flow new NTZ policy request from the UAE client to the UAE server.

Table 7.11.3.7-1: New NTZ policy request

Information element	Status	Description
UAS ID	M	The identification of the UAS. This could be in form of identifier for the UAS, e.g. group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI.
Location information	M	Location and altitude of the UAE client when the request is sent.

7.11.3.8 New NTZ policy response

Table 7.11.3.8-1 describes the information flow new NTZ policy response from the UAE server to the UAE client.

Table 7.11.3.8-1: New NTZ policy response

Information element	Status	Description
UAS ID	M	The identification of the UAS for which the NTZ configuration request applies. This could be in form of identifier for the UAS, e.g. group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI.
NTZ configuration	O	NTZ configuration information to be configured at the UAS
> Area for deactivating transmission	M	The area where the NTZ management request applies. This can be geographical area, or topological area in which the no-transmit zone is active including specific altitude (e.g., ceiling and floor altitude).
> List of restricted frequency bands	M	The list of frequency bands not allowed to be used in the NTZ.
>> Time period	O	The time period when the NTZ is valid for the frequency band.
>> Frequency band	M	The information for a frequency band not allowed to be used in the no-transmit zone.
>> RAT type	M	The information for the RAT associated with the frequency band.
>Reporting configuration	M	The NTZ reporting configuration of the UE, including the required reporting (e.g., prior to entering or after exiting or both) and the time interval for reporting.

7.11.3.9 Enforce NTZ request

Table 7.11.3.9-1 describes the information flow enforce NTZ request from the UAE server to the UAE client.

Table 7.11.3.9-1: Enforce NTZ request

Information element	Status	Description
UAS ID	M	The identification of the UAS for which the NTZ configuration request applies. This could be in form of identifier for the UAS, e.g. group ID; or collection of individual identifiers for the UAV and UAV-C, e.g. CAA level UAV ID, GPSI.
NTZ enforcement information (see NOTE)	O	NTZ enforcement information to be executed at the UAS
> Area for deactivating transmission	M	The area where the NTZ management request applies. This can be geographical area, or topological area in which the no-transmit zone is active.
>Altitude	M	Altitude range for the NTZ (e.g., ceiling and floor altitude).
> List of restricted frequency bands	M	The list of frequency bands not allowed to be used in the NTZ.
>> Time	O	Specific time window for deactivating the transmission for the frequency band.
>> Frequency band	M	The information for a frequency band not allowed to be used in the no-transmit zone.
>> RAT type	M	The information for the RAT associated with the frequency band.
NOTE: If NTZ enforcement information IE is not included, it indicates removal of the NTZ enforcement at the UAS ID.		

7.11.3.10 Enforce NTZ response

Table 7.11.3.10-1 describes the information flow enforce NTZ response from the UAE client to the UAE server.

Table 7.11.3.10-1: Enforce NTZ response

Information element	Status	Description
Result	M	The positive or negative result of the enforce NTZ request

8 APIs

8.1 General

The following UAE capabilities are offered as APIs:

- UAE server APIs;

The following SEAL service APIs are specified in 3GPP TS 23.434 [5]:

- Group management server APIs;
- Location management server APIs;
- Configuration management server APIs;
- Identity management server APIs; and
- Key management server APIs.

The following SEAL service APIs are specified in 3GPP TS 23.435 [14]:

- Network slice optimization APIs based on VAL server policy,

When UAS application specific server invokes a SEAL server API directly, the UAS application specific server acting as VAL server shall interact with the corresponding SEAL server over the SEAL-S reference point for the API invocation request and response as specified in 3GPP TS 23.434 [5].

Requesting specific QoS per planned flight path/waypoint is available using Policy of needed minimum QoS per UE in the SS_NSCE_PolicyManagement API, see 3GPP TS 23.435 [14] clause 9.5.4.1.

8.2 UAE server APIs

8.2.1 General

Table 8.2.1-1 illustrates the UAE server APIs.

Table 8.2.1-1: List of UAE server APIs

API Name	API Operations	Known Consumer(s)	Communication Type
UAE_C2OperationModeManagement API	Manage_C2OperationMode	UAS application specific server	Request/Response
	Notify_SelectedC2Mode (NOTE 1)	UAS application specific server	Subscribe/notify
	Notify_C2ModeSwitching (NOTE 1)	UAS application specific server	Subscribe/notify
	Notify_C2OperationModeManagementComplete (NOTE 1)	UAS application specific server	Subscribe/notify
UAE_RealtimeUAVStatus API	Subscribe_RealtimeUAVStatus	UAS application specific server	Subscribe/notify
	Unsubscribe_RealtimeUAVStatus	UAS application specific server	Subscribe/notify

	Notify_RealtimeUAVStatus	UAS application specific server	Subscribe/notify
UAE_ChangeUSSManagement API	Manage_USSManagement	UAS application specific server	Request/Response
	Notify_USSManagementComplete	UAS application specific server	Subscribe/notify
	Manage_USSChange	UAS application specific server	Request/Response
	Notify_USSChange	UAS application specific server	Subscribe/notify
	Notify_USSChangeTrigger	UAS application specific server	Subscribe/notify
UAE_DAASupport API	Manage_DAAManagement	UAS application specific server	Request/Response
	Notify_DAAManagementComplete	UAS application specific server	Subscribe/notify
	Notify_DAAClientSupportEvent	UAS application specific server	Subscribe/notify
	Manage_DAAServerSupportEvent	UAS application specific server	Request/Response
UAE_UAVDynamicInfo API	Subscribe_UAVDynamicInfo	UAS application specific server	Subscribe/notify
	Unsubscribe_UAVDynamicInfo	UAS application specific server	Subscribe/notify
	Notify_UAVDynamicInfo	UAS application specific server	Subscribe/notify
UAE_FlightPathMonitoring API	Manage_FlightPathReportingConfiguration	UAS application specific server	Request/Response
	Notify_FlightPathReportingConfigurationComplete	UAS application specific server	Subscribe/notify
	Notify_FlightPathEventReport	UAS application specific server	Subscribe/notify
UAE_FlightRouteSupport API	Manage_QoSFlightRoutePlan	UAS application specific server, UAE client	Request/Response
	Manage_NTZ	UAS application specific server	Request/response
	Notify_NTZManagementComplete (NOTE 2)	UAS application specific server	Subscribe/notify
	Configure_NTZ	UAE server	Request/response
	Notify_NTZ (NOTE 3)	UAE server, UAS application specific server	Subscribe/notify
SSUAE_NTZenforce API	Enforce_NTZ	UAE server	Request/response
UAE_newNTZpolicy API	NewPolicy_NTZ	UAE client	Request/response
NOTE 1: The subscribe operation for Notify_C2OperationModeManagementComplete, Notify_SelectedC2Mode and Notify_C2ModeSwitching is part of Manage_C2OperationMode			
NOTE 2: The subscribe operation for Notify_NTZManagementComplete is part of Manage_NTZ			
NOTE 3: The subscribe operation for Notify_NTZ is part of Configure_NTZ			

8.2.2 UAE_C2OperationModeManagement API

8.2.2.1 General

API description: This API enables the UAS application specific server to communicate with the UAE server to send configurations for C2 operation modes for the UAS and receive notifications of the selected C2 communication modes from the UAS UEs (i.e. UAV, UAV-C).

8.2.2.2 Manage_C2OperationMode operation

API operation name: Manage_C2OperationMode

Description: Manage (initiate, change or delete) the configuration of the C2 operation modes for the UAS UEs.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.4.3.1.

Outputs: Refer clause 7.4.3.2.

See clause 7.4.2.1 for the details of usage of this API operation.

8.2.2.3 Notify_SelectedC2Mode

API operation name: Notify_SelectedC2Mode

Description: Notification of the selected C2 communication modes from the UAS UEs.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.4.3.10.

Outputs: Refer clause 7.4.3.11.

See clause 7.4.2.3 for the details of usage of this API operation.

8.2.2.4 Notify_C2ModeSwitching

API operation name: Notify_C2ModeSwitching

Description: Notification of the C2 communication mode switching from the UAS UEs.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.4.3.5.

Outputs: Refer clause 7.4.3.6.

See clause 7.4.2.4 for the details of usage of this API operation.

8.2.2.5 Notify_C2OperationModeManagementComplete

API operation name: Notify_C2OperationModeManagementComplete

Description: Notification about the C2 operation mode management completion by UAE server.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.4.3.3.

Outputs: None.

See clause 7.4.2.1 for the details of usage of this API operation.

8.2.3 UAE_ RealtimeUAVStatus API

8.2.3.1 General

API description: This API enables the UAS application specific server to subscribe for and receive notifications for the realtime status information of the UAV.

8.2.3.2 Subscribe_RealtimeUAVStatus operation

API operation name: Subscribe_RealtimeUAVStatus

Description: Subscription for obtaining the realtime UAV status information.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.5.3.2.

Outputs: Refer clause 7.5.3.3.

See clause 7.5.2.2 for the details of usage of this API operation.

8.2.3.3 Unsubscribe_RealtimeUAVStatus operation

API operation name: Unsubscribe_RealtimeUAVStatus

Description: Unsubscription for a existing subscription for obtaining the realtime UAV status information.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.5.3.5.

Outputs: Refer clause 7.5.3.6.

See clause 7.5.2.4 for the details of usage of this API operation.

8.2.3.4 Notify_RealtimeUAVStatus operation

API operation name: Notify_RealtimeUAVStatus

Description: Notification of the realtime UAV status information.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.5.3.4.

Outputs: None.

See clause 7.5.2.3 for the details of usage of this API operation.

8.2.4 UAE_ChangeUSSManagement API

8.2.4.1 General

API description: This API enables the UAS application specific server to communicate with the UAE server to send policies, requests for change of USS for the UAS and receive notifications from the UAS UEs (i.e. UAV) about change of USS.

8.2.4.2 Manage_USSManagement operation

API operation name: Manage_USSManagement

Description: Manage (initiate, change or delete) the configuration of the policies for change of USS for the UAS UEs.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.6.3.1.

Outputs: Refer clause 7.6.3.2.

See clause 7.6.2.1 for the details of usage of this API operation.

8.2.4.3 Notify_USSManagementComplete operation

API operation name: Notify_USSManagementComplete

Description: Notification about the USS management completion by UAE server.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.6.3.3.

Outputs: None.

See clause 7.6.2.1 for the details of usage of this API operation.

8.2.4.4 Manage_USSChange operation

API operation name: Manage_USSChange

Description: Manage change of USS on request from UAS application specific server.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.6.3.6.

Outputs: Refer clause 7.6.3.7.

See clause 7.6.2.3 for the details of usage of this API operation.

8.2.4.5 Notify_USSChange operation

API operation name: Notify_USSChange

Description: Notification about the change of USS required by UAS UE.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.6.3.8.

Outputs: None.

See clause 7.6.2.4 for the details of usage of this API operation.

8.2.4.6 Notify_USSChangeTrigger

API operation name: Notify_USSChangeTrigger

Description: Notify a trigger event related to the recommended change of USS.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.6.3.9.

Outputs: None.

See clause 7.6.2.5 for the details of usage of this API operation.

8.2.5 UAE_DAASupport API

8.2.5.1 General

API description: This API enables the UAS application specific server to communicate with the UAE server for the DAA application policy and send and receive notifications related with DAA support aspects between the USS and the UAE client.

8.2.5.2 Manage_DAAManagement operation

API operation name: Manage_DAAManagement

Description: Manage (initiate, change or delete) configuration of the DAA application policy.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.7.3.1.

Outputs: Refer clause 7.7.3.2.

See clause 7.7.2.1.1 for the details of usage of this API operation.

8.2.5.3 Notify_DAAManagementComplete operation

API operation name: Notify_DAAManagementComplete

Description: Notification about the DAA management completion by UAE server.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.7.3.3.

Outputs: None.

See clause 7.7.2.1.1 for the details of usage of this API operation.

8.2.5.4 Notify_DAAClientSupportEvent operation

API operation name: Notify_DAAClientSupportEvent

Description: Notification about possible UAVs in proximity, identified by the client.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.7.3.6.

Outputs: Refer clause 7.7.3.7.

See clause 7.7.2.2.1 for the details of usage of this API operation.

8.2.5.5 Manage_DAAServerSupportEvent operation

API operation name: Manage_DAAServerSupport

Description: Notification about possible UAVs in proximity, identified by the server.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.7.3.8.

Outputs: Refer clause 7.7.3.9.

See clause 7.7.2.2.2 for the details of usage of this API operation.

8.2.6 UAE_UAVDynamicInfo API

8.2.6.1 General

API description: This API enables the UAS application specific server to subscribe for and receive notifications for the host UAV dynamic information.

8.2.6.2 Subscribe_UAVDynamicInfo operation

API operation name: Subscribe_UAVDynamicInfo

Description: Subscription for obtaining the UAV dynamic information.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.8.3.1.

Outputs: Refer clause 7.8.3.2.

See clause 7.8.2.1 for the details of usage of this API operation.

8.2.6.3 Unsubscribe_UAVDynamicInfo operation

API operation name: Unsubscribe_UAVDynamicInfo

Description: Unsubscription for a existing subscription for obtaining the UAV dynamic information.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.8.3.5.

Outputs: Refer clause 7.8.3.6.

See clause 7.8.2.x for the details of usage of this API operation.

8.2.6.4 Notify_UAVDynamicInfo operation

API operation name: Notify_UAVDynamicInfo

Description: Notification of the UAV dynamic information.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.8.3.4.

Outputs: None.

See clause 7.8.2.4 for the details of usage of this API operation.

8.2.7 UAE_FlightPathMonitoring API

8.2.7.1 General

API description: This API enables the UAS application specific server to communicate with the UAE server to send information related to real time flight path monitoring for the UAS and receive notifications from the UAS UEs (i.e. UAV) about real time flight path monitoring.

8.2.7.2 Manage_FlightPathReportingConfiguration

API operation name: Manage_FlightPathReportingConfiguration

Description: Manage (initiate, change or delete) the configuration of the real time flight path monitoring for the UAS UEs.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.9.3.1.

Outputs: Refer clause 7.9.3.2.

See clause 7.9.2.1 for the details of usage of this API operation.

8.2.7.3 Notify_FlightPathReportingConfigurationComplete

API operation name: Notify_FlightPathReportingConfigurationComplete

Description: Notification about the real time flight path monitor completion by UAE server.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.9.3.3.

Outputs: None.

See clause 7.9.2.1 for the details of usage of this API operation.

8.2.7.4 Notify_FlightPathEventReport

API operation name: Notify_FlightPathEventReport

Description: Notification of the real time flight path monitoring from the UAS UEs.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.9.3.7.

Outputs: Refer clause 7.9.3.8.

See clause 7.9.2.3 for the details of usage of this API operation.

8.2.8 UAE_FlightRouteSupport API

8.2.8.1 General

API description: This API enables the UAS application specific server or the UAE client to communicate with the UAE server to send information related to creating flight path for the UAS and receive response from the UAE server containing list of waypoints which support the requested QoS and service availability.

8.2.8.2 Manage_QoSFlightRoutePlan

API operation name: Manage_QoSFlightRoutePlan

Description: Request the flight route for the UAS UEs based on needed QoS and service availability.

Known Consumers: UAS application specific server or UAE client.

Inputs: Refer clause 7.10.3.1.

Outputs: Refer clause 7.10.3.2.

See clause 7.10.2.1 for the details of usage of this API operation.

8.2.9 UAE_NTZ management API

8.2.9.1 General

API description: This API enables the UAS application specific server to communicate with the UAE server to send configurations for NTZ management.

8.2.9.2 Manage_NTZ

API operation name: Manage_NTZ

Description: Manage the configuration of the NTZ for the UAS UEs.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.11.3.1.

Outputs: Refer clause 7.11.3.2.

See clause 7.11.2.1 for the details of usage of this API operation.

8.2.9.3 Notify_NTZManagementComplete

API operation name: Notify_NTZManagementComplete

Description: Notification about the NTZ management completion by UAE server.

Known Consumers: UAS application specific server.

Inputs: Refer clause 7.11.3.3.

Outputs: None.

See clause 7.11.2.1 for the details of usage of this API operation.

8.2.9 UAE_NTZ configuration API

8.2.9.1 General

API description: This API enables the UAE server to communicate with the UAE client to send configuration about NTZ. This API enables the UAE client to notify the UAE server and the UAE server to notify the UAS application specific server about NTZ status changes in the UAE client.

8.2.9.2 Configure_NTZ

API operation name: Configure_NTZ

Description: Configure NTZ in UAE client.

Known Consumers: UAE server.

Inputs: Refer clause 7.11.3.4.

Outputs: Refer clause 7.11.3.5.

See clause 7.11.2.2 for the details of usage of this API operation.

8.2.9.3 Notify_NTZ

API operation name: Notify_NTZ

Description: Notify of NTZ status changes in the UAE client.

Known Consumers: UAE server, UAS application specific server.

Inputs: Refer clause 7.11.3.6.

Outputs: None.

See clause 7.11.2.3 for the details of usage of this API operation.

8.2.10 UAE_NTZ enforce API

8.2.10.1 General

API description: This API enables the UAE server to communicate with the UAE client to send enforced configuration on NTZ.

8.2.10.2 Enforce_NTZ

API operation name: Enforce_NTZ

Description: Enforce NTZ in UAE client.

Known Consumers: UAE server.

Inputs: Refer clause 7.11.3.9.

Outputs: Refer clause 7.11.3.10.

See clause 7.11.2.4 for the details of usage of this API operation.

8.2.11 UAE_newNTZ policy API

8.2.11.1 General

API description: This API enables the UAE client to communicate with the UAE server to obtain a new NTZ policy.

8.2.11.2 NewPolicy_NTZ

API operation name: NewPolicy_NTZ

Description: Configure new NTZ policy in UAE client.

Known Consumers: UAE client.

Inputs: Refer clause 7.11.3.7.

Outputs: Refer clause 7.11.3.8.

See clause 7.11.2.5 for the details of usage of this API operation.

Annex A (informative): Support for edge deployments

The application architecture for supporting edge applications are specified in 3GPP TS 23.558 [7]. The UAS application layer as specified in clause 5 can be deployed in edge computing environment.

Figure A-1 illustrates a UAS application layer deployment in edge computing environments.

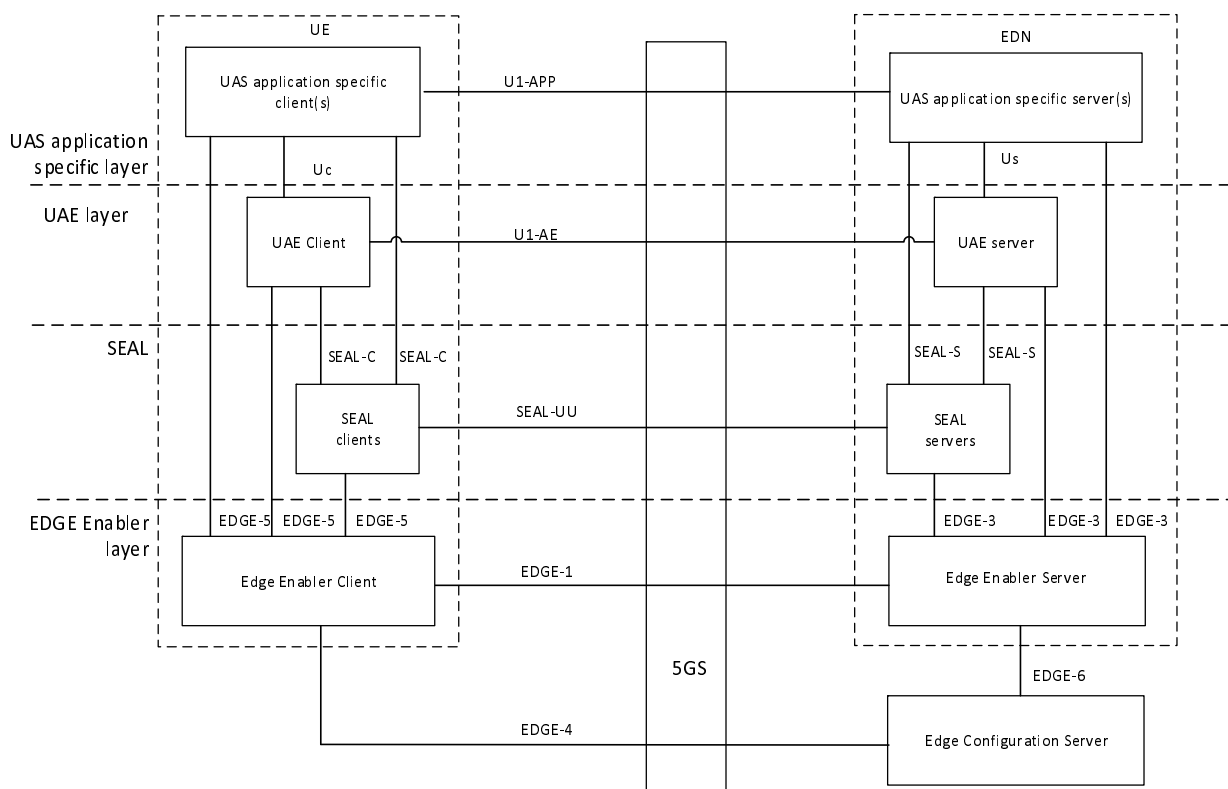


Figure A-1: UAS application layer deployment in edge computing environment

Figure A-1 illustrates how the UAS application architecture can be deployed with the application architecture for supporting edge applications. In a UE, the UAS application specific client(s), UAE client and SEAL clients interact with the Edge Enabler Client (EEC) via EDGE-5 reference point in order to consume edge services. In an Edge Data Network (EDN), the UAS application specific server(s), UAE server and SEAL servers acting as Edge Application Server (EAS), interacts with the Edge Enabler Server (EES) via EDGE-3 reference point. The service provisioning and EAS discovery enable the UAS application layer entities in the UE to communicate with the application layer entities in the EDN. The interactions between the entities and 5GS are not shown for the sake of simplicity.

NOTE: This clause illustrates an example edge deployment using edge enabler layer. There can be other valid edge deployments enabled for UAS application layer.

Annex B (Informative): Deployment models

B.1 General

This clause describes deployments of the functional model specified in clause 5. The reference points utilized from underlying 3GPP network as specified in clause 5.5 is represented as 3GPP interfaces in the deployment models.

NOTE: The representation of SEAL functionalities in the vertical deployment is specified in 3GPP TS 23.434 [5].

B.2 Deployment of UAE server

The UAE server deployments can be centralized and distributed.

B.2.1 Centralized deployments

A centralized deployment is where a single UAE server offers the UAE capabilities to one or more UAS application specific servers (e.g. USS/UTM). The UAE server and the UAS application specific server can be co-located in a single physical entity. The UAE server can be deployed either in the PLMN operator domain or deployed in the UAS operator domain. The UAE server connects with the 3GPP network systems (EPS, 5GS) in one or more PLMN operator domain. When UAE server and UAS application specific server are co-located in a single physical entity, the *Us* reference point between the UAE server and the UAS application specific server is not used.

Figure B.2.1-1 illustrates a deployment of the UAE server and the UAS application specific server in a single physical entity and deployed in UAS operator domain. The UAE server can be deployed in a separate physical entity from the UAS application specific server in the UAS operator domain. In such deployments, the *Us* reference point is used for the communication between the UAE server and the UAS application specific server.

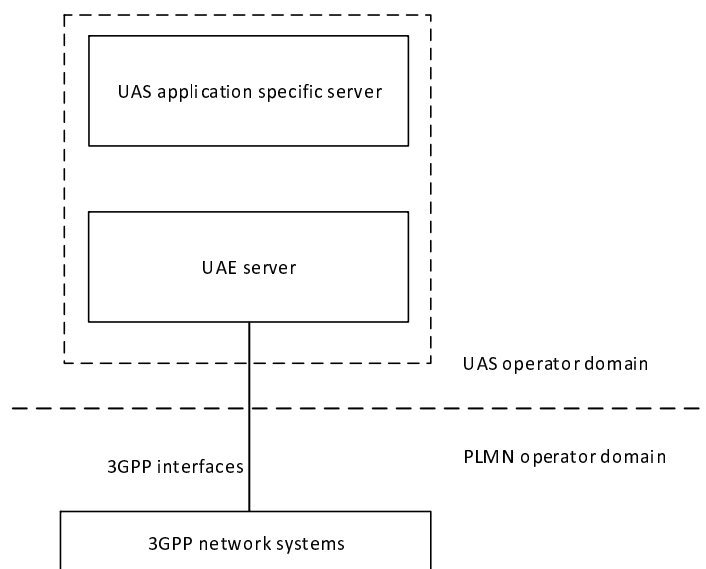


Figure B.2.1-1: UAE server co-located with UAS application specific server in a single physical entity

Figure B.2.1-2 illustrates a deployment of the UAE server in the PLMN operator domain and the UAS application specific server in the UAS operator domain. The *Us* reference point is used for the communication between UAS application specific server and the UAE server. The UAE server can support multiple UAS application specific servers.

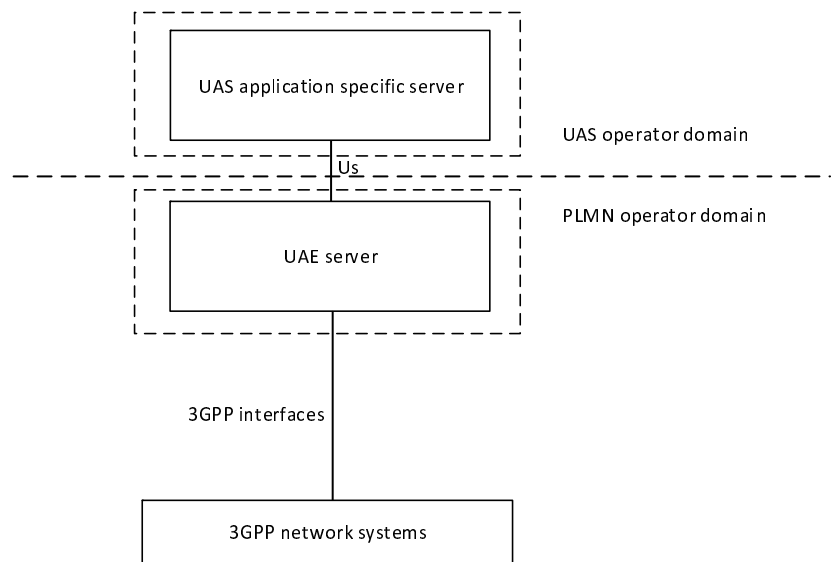


Figure B.2.1-2: UAE server deployed in the PLMN operator domain

Figure B.2.1-3 illustrates a deployment of the UAE server which connects to the 3GPP network systems (EPS, 5GS) in multiple PLMN operator domain. The UAE server can be co-located with the UAS application specific server in a single physical entity or deployed in different physical entities.

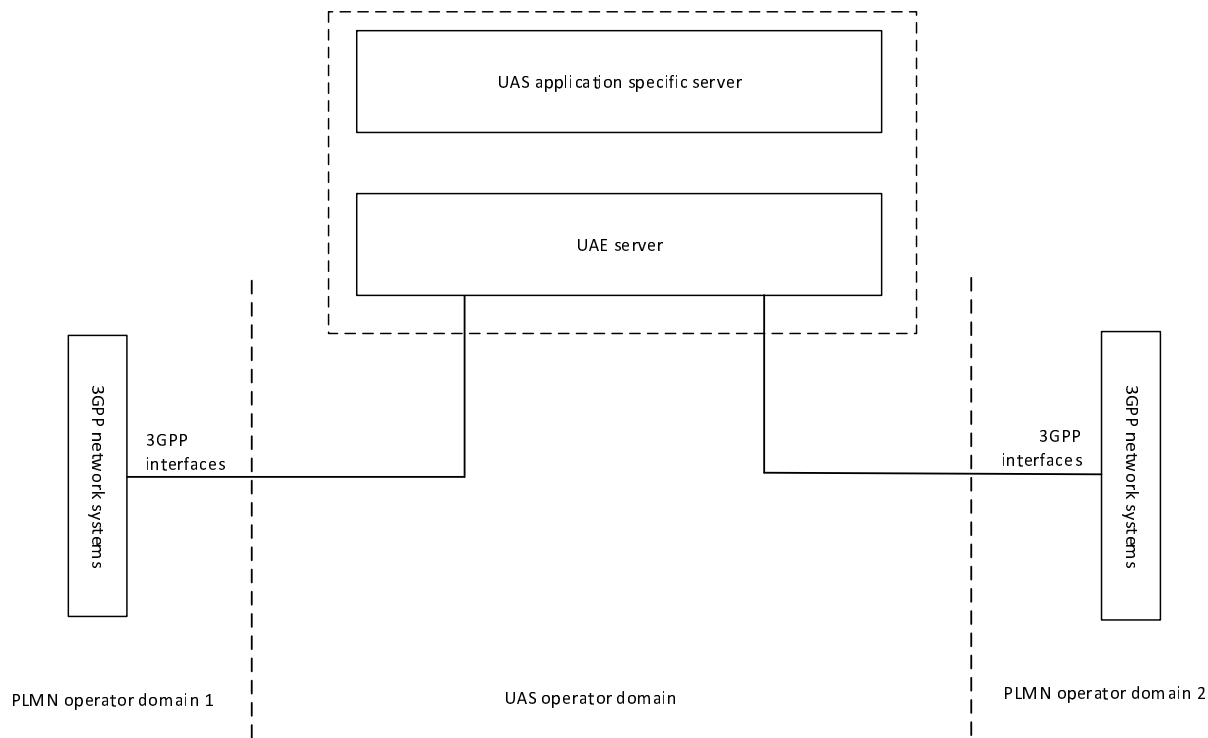


Figure B.2.1-3: Deployment of UAE server with connections to 3GPP network systems in multiple PLMN operator domains

Figure B.2.1-4 illustrates a deployment of the UAE server which provides UAE capabilities to multiple UAS application specific servers over *Us* reference point and connects to the 3GPP network systems (EPS, 5GS) in multiple PLMN operator domain.

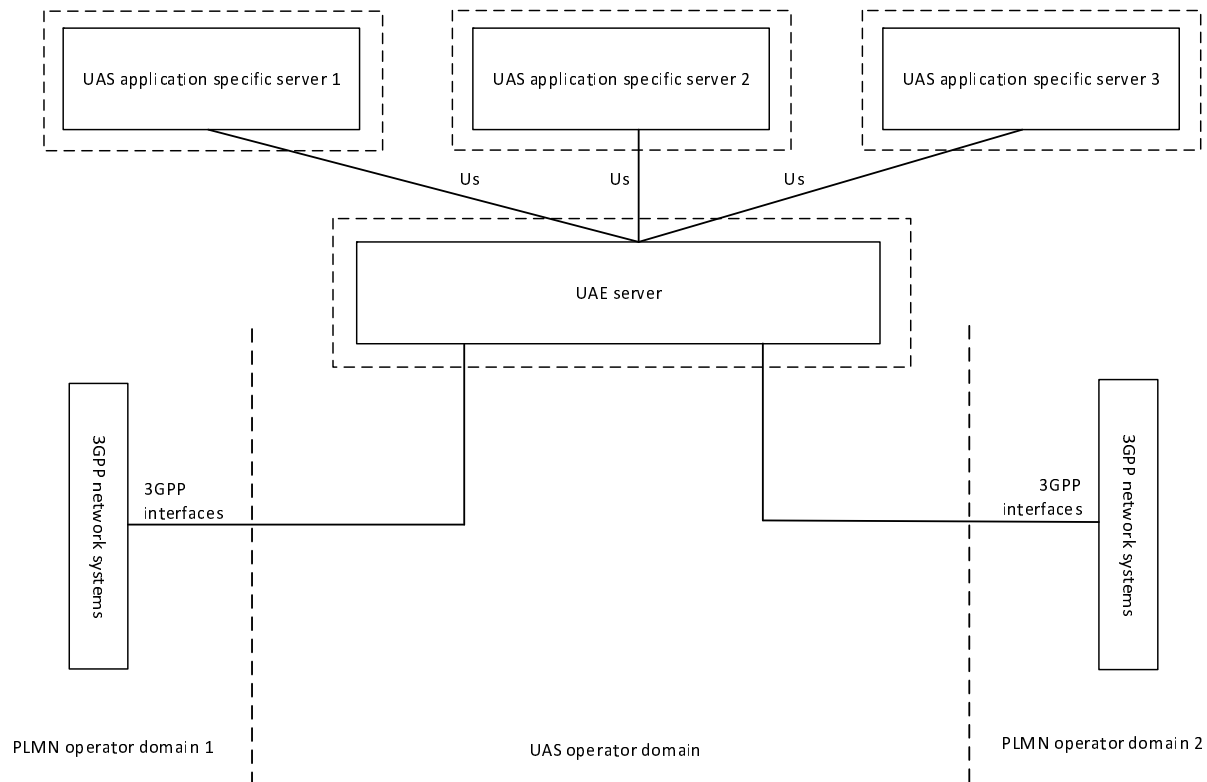


Figure B.2.1-4: Deployment of UAE server with connections to multiple UAS application specific servers

B.2.2 Distributed deployment

The distributed deployment is where multiple UAE servers are deployed either in the UAS operator domain or in the PLMN operator domain. The distributed deployment of the UAE servers provide geographical coverage or support multiple PLMN operator domains in a geographical location. The UAE servers interconnect via UAE-E and the Us reference point is used for interaction between UAS application specific server and the UAE server.

Figure B.2.2-1 illustrates the deployment of UAE servers in multiple PLMN operator domain and provides UAE capabilities to the UAS application specific server deployed in the UAS operator domain. The UAS application specific server connects via Us to the UAE servers.

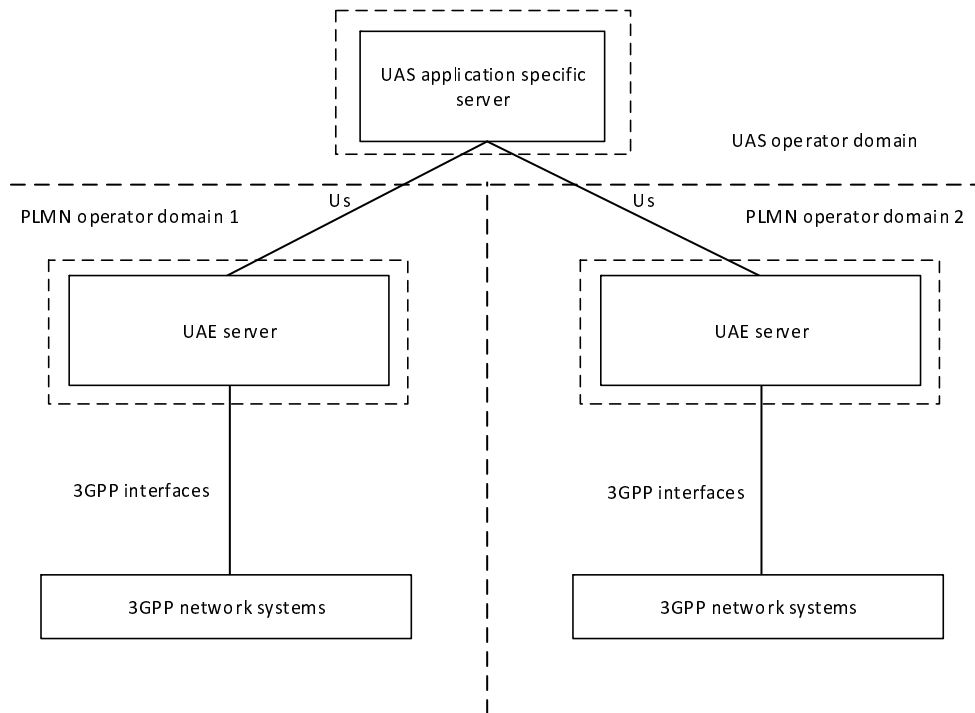


Figure B.2.2-1: Distributed deployment of UAE servers in multiple PLMN operator domain without interconnection between UAE servers

Figure B.2.2-2 illustrates the deployment of multiple UAE servers deployed in multiple PLMN operator domains. The UAS application specific server connects via Us to the UAE server. The interconnection between UAE servers is via UAE-E and supports the UAS applications for the UAS UEs connected to the UAE servers in multiple PLMN operator domains.

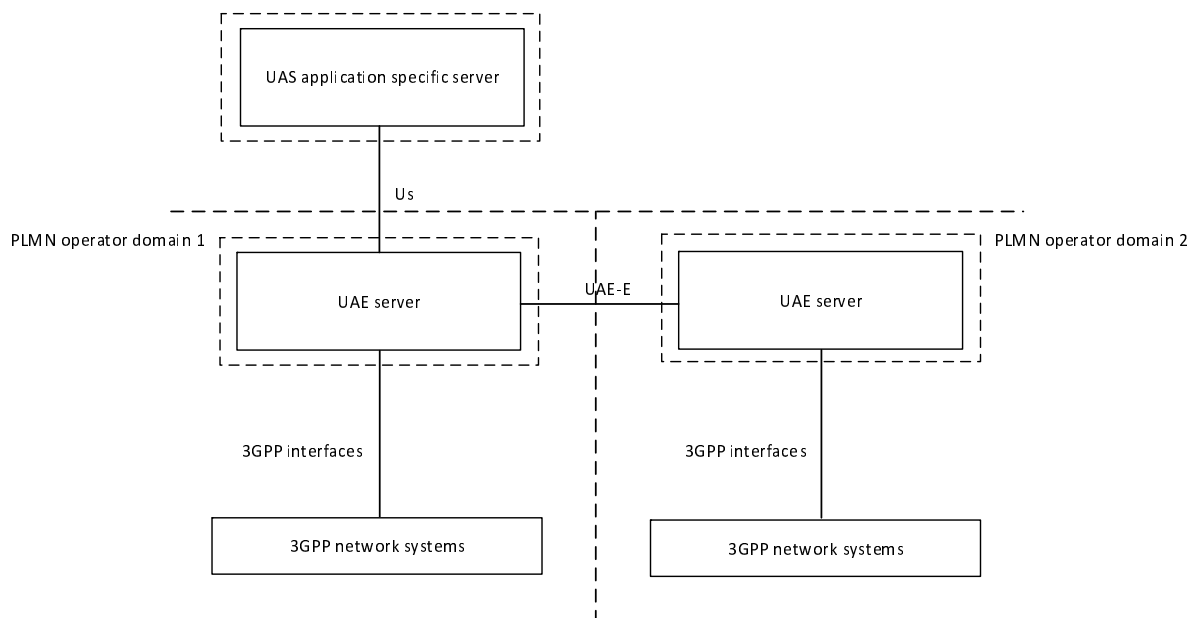


Figure B.2.2-2: Distributed deployment of UAE servers in multiple PLMN operator domain with interconnection between UAE servers

Figure B.2.2-3 illustrates the deployment of multiple UAE servers in PLMN operator domain based on geographical coverage. The UAS application specific server connects via Us to the UAE server 1. The UAE servers interconnect via UAE-E and support the UAS communications to the UAS UEs (i.e., UAV, UAV-C) connected to the UAE servers.

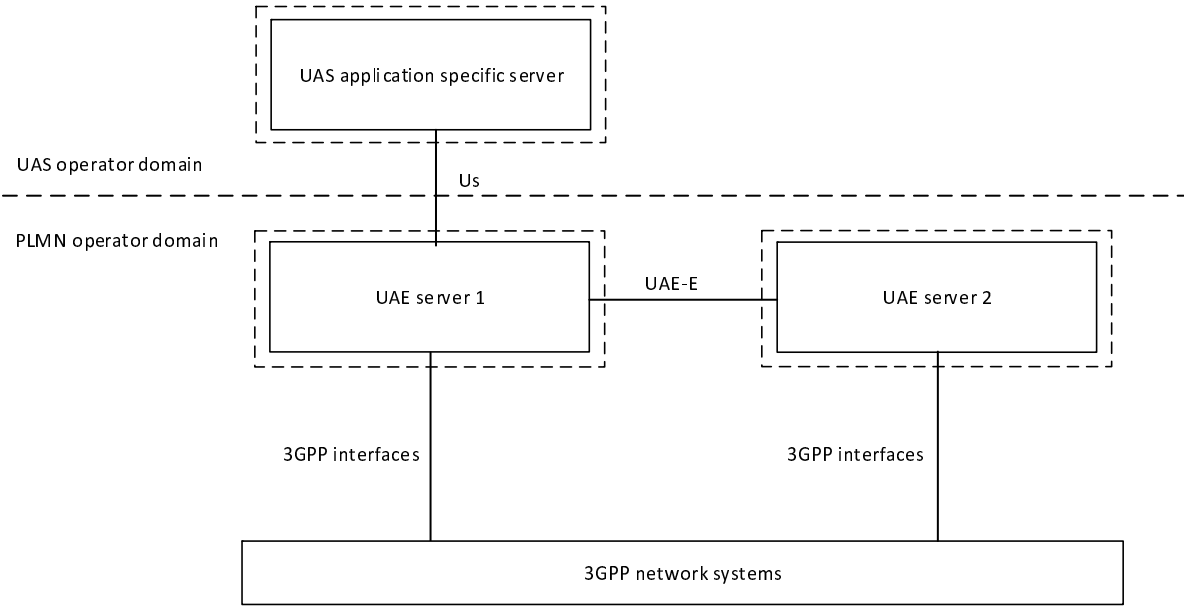


Figure B.2.2-3: Distributed deployment of UAE servers in PLMN operator domain

Figure B.2.2-4 illustrates the deployment of multiple UAE servers in the UAS operator domain where UAE server 1 and UAE server 2 connect with 3GPP network system of PLMN operator domain 1 and PLMN operator domain 2 respectively. The UAS application specific server connects via Us to the UAE server 1. The UAE servers interconnect via UAE-E and support the UAS applications for the UAS UEs connected via both the PLMN operator domains.

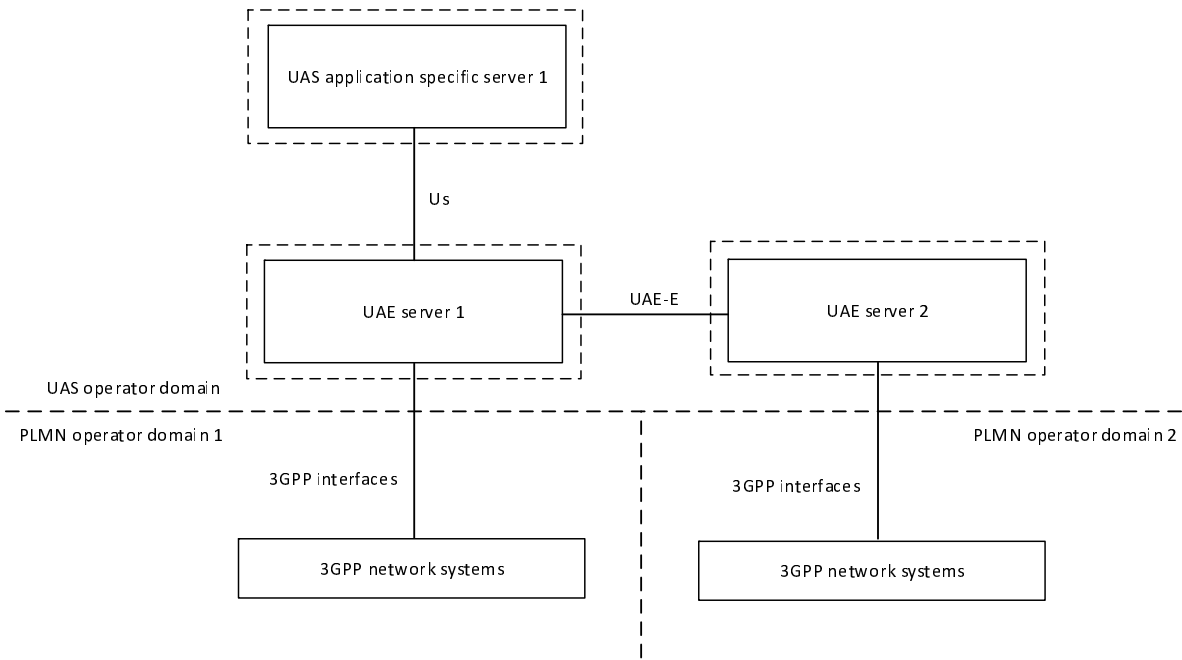


Figure B.2.2-4: Distributed deployment of UAE servers in UAS operator domain

Annex C (informative): Examples of usage of SEAL by UAS application specific server

All procedures of SEAL services (e.g. GMS, LMS) are available directly for usage by UAS application specific server. Some examples of the usage of SEAL by the UAS application specific server is illustrated below:

- Group creation procedures of Group Management server provides support for the UAS applications (e.g. paired UAV and UAV-C are grouped) to provide a dedicated group for the UAV and UAV-C to communicate with each other.
- The UAS application specific server (e.g. USS/UTM) monitors the presence of UAVs in a given geographic area by using the Monitoring Location Deviation procedure of the LM server.
- The UAS application specific server (e.g. USS/UTM) can directly fetch the multiple UAV related events from NRM server (e.g. to detect any events related to the UAV, the UAS application specific server can need multiple events related to the UAV (UE) from the 3GPP core network).
- The UAS application specific client and UAS application specific server can utilize the resource management procedures of the NRM server to manage unicast resources associated to SIP sessions.

Annex D (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-11	SA6#40-e					TS skeleton approved in S6-202322	0.0.0
2020-11	SA6#40-e					Implementation of the following pCRs approved by SA6: S6-202204, S6-202324, S6-202354	0.1.0
2021-01	SA6#41-e					Implementation of the following pCRs approved by SA6: S6-210149, S6-210296, S6-210349	0.2.0
2021-01	SA6#41-e					Editorial correction of ref [3] specification number from 23.254 to 23.256.	0.2.1
2021-03	SA6#42-e					Implementation of the following pCRs approved by SA6: S6-210555, S6-210556, S6-210718, S6-210719	0.3.0
2021-04	SA6#42-BIS-e					Implementation of the following pCRs approved by SA6: S6-211008, S6-211035, S6-211099, S6-211100, S6-211101, S6-211102, S6-211103, S6-211104, S6-211105	0.4.0
2021-04	SA6#43-e					Implementation of the following pCRs approved by SA6: S6-211254, S6-211304, S6-211308, S6-211311, S6-211363, S6-211364, S6-211365, S6-211366, S6-211386, S6-211458, S6-211459, S6-211460, S6-211461, S6-211462, S6-211463, S6-211468	0.5.0
2021-06	SA#92-e	SP-210471				Presentation for approval at SA#92-e	1.0.0
2021-06	SA#92-e	SP-210471				MCC Editorial update for publication after TSG SA approval (SA#92)	17.0.0
2021-06	SA#92-e	SP-210579				MCC Editorial update of the titles of the present document as well as ref [4] to align UAS terminology (SA#92)	17.0.1
2021-09	SA#93-e	SP-210966	0003	1	F	Correction of SEAL references	17.1.0
2021-09	SA#93-e	SP-210966	0004	1	D	Terminology alignment to use uncrewed	17.1.0
2021-09	SA#93-e	SP-210966	0005	1	F	Alignment with 5GC architecture	17.1.0
2021-09	SA#93-e	SP-210966	0006	1	F	Resolve EN about Geographical Area	17.1.0
2021-09	SA#93-e	SP-210966	0007		F	Alignment of text in clause 7.4.2.3	17.1.0
2021-09	SA#93-e	SP-210966	0008		F	Correction to the UAV ID assignment assumption	17.1.0
2021-09	SA#93-e	SP-210966	0009		F	Correction to add the missing reference of UUAA 5GC procedure	17.1.0
2021-09	SA#93-e	SP-210966	0010		F	Correction to the UAV application message information flow	17.1.0
2021-09	SA#93-e	SP-210966	0011		F	Correction to the input and output of Notify C2 communication mode switching operation	17.1.0
2021-09	SA#93-e	SP-210966	0012	1	F	Correction to add the missing API operation for C2 operation mode configuration complete notification	17.1.0
2021-09	SA#93-e	SP-210966	0013	1	F	Correction about IP address use as UAV ID	17.1.0
2021-09	SA#93-e	SP-210966	0014	1	F	Correction to the usage of UAS ID	17.1.0
2021-09	SA#93-e	SP-210966	0015		F	Correction to the C2 operation mode switching confirmation	17.1.0
2021-09	SA#93-e	SP-210966	0016	1	F	Correction to add the missing UAE layer registration procedure	17.1.0
2021-09	SA#93-e	SP-210966	0017	1	F	Resolving the editor's note regarding usage of realtime UAV status	17.1.0
2021-12	SA#94-e	SP-211528	0018		F	Missing API on Realtime UAV status	17.2.0
2021-12	SA#94-e	SP-211528	0019		F	Alignment of the term "USS/UTM" throughout TS 23.255	17.2.0
2021-12	SA#94-e	SP-211528	0020		D	Removal of Editor's Note in Introduction	17.2.0
2021-12	SA#94-e	SP-211528	0021		F	Missing IE for Realtime UAV status subscription request	17.2.0
2021-12	SA#94-e	SP-211528	0022		F	Removal of Editor's Notes in clause 5.2	17.2.0
2021-12	SA#94-e	SP-211528	0023	1	F	Removal of Editor's Notes in clause 7.3	17.2.0
2022-03	SA#95-e	SP-220104	0024	1	F	Corrections for operations of C2 communication mode switching	17.3.0
2022-03	SA#95-e	SP-220104	0025		F	Correction for realtime UAV status	17.3.0
2022-12	SA#98-e	SP-221237	0027	2	F	Clarifications on usage of EDGE in Annex A	17.4.0
2022-12	SA#98-e	SP-221237	0028		F	Removal of normative text in an informative annex	17.4.0
2022-12	SA#98-e	SP-221251	0026	1	B	Requirements for support for multi-USS deployments	18.0.0
2022-12	SA#98-e	SP-221251	0029	1	B	Additions to functional entities on support for multi-USS deployments	18.0.0
2022-12	SA#98-e	SP-221251	0030	1	B	Addition of multi-USS capabilities to UAE layer registration	18.0.0
2022-12	SA#98-e	SP-221251	0031	2	B	Addition of procedures for multi-USS configuration and support at change of USS	18.0.0
2022-03	SA#99	SP-230277	0033	2	A	Correction of various inconsistencies and unclarties	18.1.0
2022-03	SA#99	SP-230297	0034	2	B	Addition of IEs to messages related with change of USS	18.1.0
2022-03	SA#99	SP-230297	0035	1	B	Addition of API for change of USS	18.1.0
2022-03	SA#99	SP-230297	0036	2	B	Requirements for support for DAA	18.1.0
2022-03	SA#99	SP-230297	0037	4	B	Additions to functional entities on support for DAA deployments	18.1.0
2022-03	SA#99	SP-230297	0038	1	B	Addition of DAA assist capability to UAE layer registration	18.1.0
2022-03	SA#99	SP-230297	0039	4	B	Addition of procedures for DAA configuration	18.1.0
2022-03	SA#99	SP-230297	0040	2	B	Addition of API for DAA	18.1.0
2022-03	SA#99	SP-230297	0041	1	B	Support the USS re-mapping for a UAS	18.1.0
2022-03	SA#99	SP-230297	0042	1	B	Enhancements to Realtime UAVs status for DAA support	18.1.0
2022-03	SA#99	SP-230297	0043	2	B	Tracking UAVs in an application defined area for DAA support	18.1.0
2023-06	SA#100	SP-230715	0044		F	Removal of Editor's Note on multi-USS	18.2.0
2023-06	SA#100	SP-230715	0045		F	Removal of Editor's Note on DAA	18.2.0
2023-06	SA#100	SP-230715	0046	3	B	Support for C2 direct mode availability reporting	18.2.0

2023-06	SA#100	SP-230715	0047	1	B	Unsubscribe UAV dynamic information	18.2.0
2023-06	SA#100	SP-230715	0048		B	UAV dynamic information API	18.2.0
2023-12	SA#102	SP-231573	0049	1	B	Improved redundancy for command and control (C2) traffic	19.0.0
2024-03	SA#103	SP-240321	0050	4	B	Support for real time UAV flight path monitoring assistance	19.1.0
2024-03	SA#103	SP-240321	0052	2	B	Require QoS along UAV planned flight path	19.1.0
2024-03	SA#103	SP-240321	0053	1	B	Simultaneous link support for UTM-Navigated C2 and clarifications	19.1.0
2024-06	SA#104	SP-240770	0054	2	B	Assist selecting UAV flight path based on QoS	19.2.0
2024-06	SA#104	SP-240770	0055	2	B	Support for DAA ground-based UAE layer assistance	19.2.0
2024-09	SA#105	SP-241231	0056	1	B	Flight route selection support API	19.3.0
2024-09	SA#105	SP-241231	0057		D	Editorial corrections	19.3.0
2024-12	SA#106	SP-241732	0059	1	B	No-transmit zones configuration and execution for UAS	19.4.0
2024-12	SA#106	SP-241732	0061		F	Alignment and work completion	19.4.0
2024-12	SA#106	SP-241732	0062		F	Clarifications to real time UAV flight path monitoring assistance	19.4.0
2025-06	SA#108	SP-250620	0063		F	NTZ Stage-3 alignment	19.5.0

History

Document history		
V19.5.0	January 2026	Publication