

# ETSI TS 124 549 V19.1.1 (2026-02)



**5G;  
Network slice capability enablement- Service Enabler  
Architecture Layer for Verticals (SEAL); Protocol specification;  
Stage 3  
(3GPP TS 24.549 version 19.1.1 Release 19)**



---

Reference

---

---

Keywords

---

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

***Important notice***

---

The present document can be downloaded from the  
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#) repository.

Users should be aware that the present document may be revised or have its status changed,  
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to  
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our  
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

---

***Notice of disclaimer & limitation of liability***

---

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

***Copyright Notification***

---

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2026.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	6
1 Scope .....	8
2 References .....	8
3 Definitions of terms, symbols and abbreviations .....	9
3.1 Terms.....	9
3.2 Abbreviations .....	10
4 General description.....	10
5 Functional entities .....	10
5.1 SEAL network slice capability enablement client (SNSCE-C).....	10
5.2 SEAL network slice capability enablement server (SNSCE-S) .....	11
6 Void.....	11
7 Network slice capability enablement services.....	11
7.1 General .....	11
7.2 Network slice adaptation service.....	11
7.2.1 Service description.....	11
7.2.1.1 Overview.....	11
7.2.2 Service operations.....	11
7.2.2.1 Introduction.....	11
7.2.2.2 Event_Triggered_Network_Slice_Adaptation .....	12
7.2.2.2.1 General .....	12
7.2.2.2.2 Network slice adaptation using Event_Triggered_Network_Slice_Adaptation service operation.....	12
7.3 Retrieval of data and information.....	13
7.3.1 Service description.....	13
7.3.1.1 Overview.....	13
7.3.2 Service operations.....	13
7.3.2.1 Introduction.....	13
7.3.2.2 Ndcf_DataReporting_CreateSession .....	14
7.3.2.2.1 General .....	14
7.3.2.2.2 Configuration of the requested data and information retrieval using Ndcf_DataReporting_CreateSession service operation .....	14
7.3.2.3 Ndcf_DataReporting_RetrieveSession.....	14
7.3.2.3.1 General .....	14
7.3.2.3.2 Updated configuration of the requested data and information retrieval using Ndcf_DataReporting_RetrieveSession service operation .....	14
7.3.2.4 Ndcf_DataReporting_Report.....	14
7.3.2.4.1 General .....	14
7.3.2.4.2 Reporting the requested data and information retrieval using Ndcf_DataReporting_Report service operation.....	15
7.4 Notification of slice information service .....	15
7.4.1 Service description.....	15
7.4.2 Service operations.....	15
7.4.2.1 Introduction.....	15
7.4.2.2 EDN_Slice_Information .....	15
7.4.2.2.1 General .....	15
7.4.2.2.2 Subscribe .....	15
7.4.2.2.3 Notification of slice information using EDN_Slice_Information service operation.....	15
7.4.2.3 InterPLMN_Slice_Information .....	16
7.4.2.3.1 General .....	16

7.4.2.3.2	Subscribe .....	16
7.4.2.3.3	Notification of slice information using InterPLMN_Slice_Information service operation .....	16
7.5	Network slice information delivery .....	16
7.5.1	Service description .....	16
7.5.2	Service operations .....	16
7.5.2.1	Introduction .....	16
7.5.2.2	Slice_Info_Delivery .....	17
7.5.2.2.1	General .....	17
7.5.2.2.2	Network slice information delivery using Slice_Info_Delivery service operation .....	17
8	API Definitions .....	17
8.1	Event triggered network slice configuration APIs .....	17
8.1.1	ETN_Configuration API .....	17
8.1.1.1	Introduction .....	17
8.1.1.2	Usage of HTTP .....	17
8.1.1.2.1	General .....	17
8.1.1.2.2	Content type .....	18
8.1.1.3	Resources .....	18
8.1.1.3.1	Overview .....	18
8.1.1.3.2	Resource: Configuration .....	18
8.1.1.3.2.1	Description .....	18
8.1.1.3.2.2	Resource definition .....	19
8.1.1.3.2.3	Resource standard methods .....	19
8.1.1.3.2.3.1	PUT .....	19
8.1.1.3.2.4	Resource Custom Operations .....	20
8.1.1.4	Custom Operations without associated resources .....	20
8.1.1.5	Notifications .....	20
8.1.1.6	Data model .....	20
8.1.1.6.1	General .....	20
8.1.1.6.2	Structured data types .....	20
8.1.1.6.2.1	Introduction .....	20
8.1.1.6.2.2	Type: NwSliceAdptEvent .....	21
8.1.1.6.2.3	Type: AppReqs .....	21
8.1.1.6.3	Simple data types and enumerations .....	21
8.1.1.6.4	Data types describing alternative data types or combinations of data types .....	21
8.1.1.6.5	Binary data .....	21
8.1.1.6.5.1	Binary Data Types .....	21
8.1.1.7	Error Handling .....	21
8.1.1.7.1	General .....	21
8.1.1.7.2	Protocol Errors .....	21
8.1.1.7.3	Application Errors .....	22
8.1.1.8	Feature Negotiation .....	22
8.1.1.9	Security .....	22
8.1.1.9.1	General .....	22
8.2	Data collection and reporting APIs .....	22
8.2.1	Ndcnf_DataReporting API .....	22
8.3	Service continuity notification APIs .....	22
8.3.1	NSCE_SliceInfo API .....	22
8.3.1.1	Introduction .....	22
8.3.1.2	Usage of HTTP .....	23
8.3.1.2.1	General .....	23
8.3.1.2.2	Content type .....	23
8.3.1.3	Resources .....	23
8.3.1.3.1	Overview .....	23
8.3.1.3.2	Resource: EDN Slice Subscriptions .....	24
8.3.1.3.2.1	Description .....	24
8.3.1.3.2.2	Resource Definition .....	24
8.3.1.3.2.3	Resource Standard Methods .....	24
8.3.1.3.2.3.1	POST .....	24
8.3.1.3.2.4	Resource Custom Operations .....	25
8.3.1.3.3	Resource: PLMN Slice Subscriptions .....	25
8.3.1.3.3.1	Description .....	25

8.3.1.3.3.2	Resource Definition .....	25
8.3.1.3.3.3	Resource Standard Methods .....	25
8.3.1.3.3.3.1	POST .....	25
8.3.1.3.3.4	Resource Custom Operations .....	25
8.3.1.3.3A	Resource: PLMN Slice Subscriptions .....	25
8.3.1.3.3A.1	Description .....	25
8.3.1.3.3A.2	Resource Definition .....	26
8.3.1.3.3A.3	Resource Standard Methods .....	26
8.3.1.3.3A.3.1	POST .....	26
8.3.1.3.4	Custom Operations without associated resources .....	26
8.3.1.3.5	Notifications .....	27
8.3.1.3.5.1	General .....	27
8.3.1.3.5.2	EDN slice notification .....	27
8.3.1.3.5.2.1	Description .....	27
8.3.1.3.5.2.2	Notification definition .....	27
8.3.1.3.5.3	PLMN slice notification .....	28
8.3.1.3.5.3.1	Description .....	28
8.3.1.3.5.3.2	Notification definition .....	28
8.3.1.3.5.4	NS Info Delivery .....	28
8.3.1.3.5.4.1	Description .....	28
8.3.1.3.5.4.2	Notification definition .....	28
8.3.1.3.6	Data Model .....	29
8.3.1.3.6.1	General .....	29
8.3.1.3.6.2	Structured data types .....	29
8.3.1.3.6.2.1	Introduction .....	29
8.3.1.3.6.2.2	Type: NSInfoDel .....	30
8.3.1.3.6.2.3	Type: NSInfo .....	30
8.3.1.3.7	Error Handling .....	30
8.3.1.3.7.1	General .....	30
8.3.1.3.7.2	Protocol Errors .....	30
8.3.1.3.7.3	Application Errors .....	30
8.3.1.3.8	Feature Negotiation .....	30
8.3.1.3.9	Security .....	31
8.3.1.3.9.1	General .....	31
9	Usage of common API framework .....	31
9.1	General .....	31
<b>Annex A (normative):</b>	<b>Void .....</b>	<b>32</b>
<b>Annex B (normative):</b>	<b>Void .....</b>	<b>33</b>
<b>Annex C (normative):</b>	<b>OpenAPI specification .....</b>	<b>34</b>
C.1	General .....	34
C.2	ETC_Configuration API .....	34
C.3	NSCE_SliceInfo API .....	36
<b>Annex D (informative):</b>	<b>Change history .....</b>	<b>40</b>
History	.....	42

---

# Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

**might not** indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

**is** (or any other verb in the indicative mood) indicates a statement of fact

**is not** (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

---

# 1 Scope

The present document specifies the protocol aspects of the SEAL service for the network slice capability enablement to support identifying network slices with capabilities for vertical applications in the 3GPP system based on 5GS management system services and 5GS network services. The protocol aspects specify the User Equipment (UE) supporting the client functionality of this SEAL service and the network supporting the server functionality of this SEAL service, where the client functionality and server functionality are specified in 3GPP TS 23.434 [2] and 3GPP TS 23.435 [13].

The present document is applicable to the application servers supporting the Vertical Application Layer server (VAL server) functionality for a specific Vertical Application Layer service (VAL service). The specification for the VAL server for a specific VAL service is out of scope of the present document.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [1A] 3GPP TR 21.900: "Technical Specification Group working methods".
- [2] 3GPP TS 23.434: "Service Enabler Architecture Layer for Verticals (SEAL); Functional architecture and information flows".
- [2A] 3GPP TS 23.502: "Procedures for the 5G System (5GS); Stage 2".
- [3] 3GPP TS 24.526: "User Equipment (UE) policies for 5G System (5GS); Stage 3".
- [3A] 3GPP TS 24.546: "Configuration management - Service Enabler Architecture Layer for Verticals (SEAL); Protocol specification".
- [4] 3GPP TS 24.547: "Identity management - Service Enabler Architecture Layer for Verticals (SEAL); Protocol specification".
- [5] Void.
- [6] IETF RFC 4825: "The Extensible Markup Language (XML) Configuration Access Protocol (XCAP)".
- [7] IETF RFC 6750: "The OAuth 2.0 Authorization Framework: Bearer Token Usage".
- [8] IETF RFC 9110: "HTTP Semantics".
- [8A] IETF RFC 9111: "HTTP Caching".
- [8B] IETF RFC 9112: "HTTP/1.1".
- [8C] IETF RFC 9113: "HTTP/2".
- [9] Void.
- [10] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".

- [11] Void.
- [12] OMA OMA-TS-XDM\_Core-V2\_1-20120403-A: "XML Document Management (XDM) Specification".
- [13] 3GPP TS 23.435: "Procedures for Network Slice Capability Exposure for Application Layer Enablement Service".
- [14] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".
- [15] 3GPP TS 26.531: "Data Collection and Reporting; General Description and Architecture".
- [16] 3GPP TS 26.532: "Data Collection and Reporting; Protocols and Formats".
- [17] 3GPP TS 29.122: "T8 reference point for Northbound Application Programming Interfaces (APIs)".
- [18] 3GPP TS 29.435: "Service Enabler Architecture Layer for Verticals (SEAL); Network Slice Capability Enablement (NSCE) Server Services; Stage 3".
- [19] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [20] 3GPP TS 29.549: "Service Enabler Architecture Layer for Verticals (SEAL); Application Programming Interface (API) specification".
- [20A] 3GPP TS 29.558: "Enabling Edge Applications; Application Programming Interface (API) specification; Stage 3".
- [21] 3GPP TS 33.434: "Service Enabler Architecture Layer for Verticals (SEAL); Security Aspects".
- [22] OpenAPI Specification: "OpenAPI Specification Version 3.0.0",  
<https://spec.openapis.org/oas/v3.0.0>.

---

## 3 Definitions of terms, symbols and abbreviations

### 3.1 Terms

For the purposes of the present document, the terms given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

**SEAL network slice capability enablement client:** An entity that provides the client side functionalities corresponding to the SEAL network slice capability enablement service.

**SEAL network slice capability enablement server:** An entity that provides the server side functionalities corresponding to the SEAL network slice capability enablement service.

For the purposes of the present document, the following terms and definitions given in 3GPP TS 23.434 [2] apply:

**SEAL client**  
**SEAL server**  
**SEAL service**  
**VAL server**  
**VAL service**  
**VAL user**  
**Vertical**  
**Vertical application**

For the purposes of the present document, the following terms and definitions given in 3GPP TS 26.532 [16] apply:

**Data Collection Client**  
**Data Collection AF**

## 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

5GCN	5G Core Network
AF	Application Function
DNN	Data Network Name
EDN	Edge Data Network
ETN	Event Triggered Network
HTTP	Hypertext Transfer Protocol
KQI	Key Quality Indicator
NSCE	Network Slice Capability Enablement
PCF	Policy Control Function
QoE	Quality of Experience
SEAL	Service Enabler Architecture Layer
SNSCE-C	SEAL Network Slice Capability Enablement Client
SNSCE-S	SEAL Network Slice Capability Enablement Server
S-NSSAI	Single Network Slice Selection Assistance Information
UE	User Equipment
URSP	UE Route Selection Policy
VAL	Vertical Application Layer
XCAP	XML Configuration Access Protocol
XDMS	XML Document Management Server
XDMC	XML Document Management Server
XML	Extensible Markup Language

---

## 4 General description

The present document enables a SEAL Network Slice Capability Enablement Client (SNSCE-C) and a Vertical Application Layer server (VAL server) that communicate with a SEAL Network Slice Capability Enablement Server (SNSCE-S). The network slice capability enablement is a SEAL service that provides the network slice capability enablement related capabilities to one or more vertical applications.

In a trusted network, the network slice capability enablement can be used to re-map a vertical application to different slices based on the configuration of the SNSCE-S for updating the application traffic. Therefore, the SNSCE-S acts as an Application Function (AF) and influences the UE's URSP rules for the application traffic by providing guidance on the route selection descriptors S-NSSAI and DNN.

NOTE: In this release, S-NSSAI and DNN are only used as the route selection descriptor.

---

## 5 Functional entities

### 5.1 SEAL network slice capability enablement client (SNSCE-C)

The SNSCE-C functional entity acts as the application client for managing network slice capabilities.

To be compliant with the HTTP procedures in the present document the SNSCE-C:

- shall support the role of XCAP client as specified in IETF RFC 4825 [6];
- shall support the role of XDMC as specified in OMAOMA-TS-XDM\_Core-V2\_1 [12]; and
- shall support route selection descriptors configuration e.g. S-NSSAI and DNN adaptation due to new requirements or change of requirements for one or more application.

## 5.2 SEAL network slice capability enablement server (SNSCE-S)

The SNSCE-S is a functional entity which provides slice capability enablement to administer the network slice for one or more vertical applications.

To be compliant with the HTTP procedures in the present document the SNSCE-S shall:

- a) shall support the role of XCAP server as specified in IETF RFC 4825 [6];
- b) shall support the role of XDMS as specified in OMA OMA-TS-XDM\_Core-V2\_1 [12]; and
- c) shall provide the 5GC network a guidance for route selection descriptors to assign new S-NSSAI and DNN.

## 6 Void

## 7 Network slice capability enablement services

### 7.1 General

The clause describes the procedures of the network slice capability enablement services.

Table 7.1-1 summarizes the SBI services produced by the SNSCE-S APIs defined for this specification.

**Table 7.1-1: API Descriptions**

Service Name	Clause	Description	OpenAPI Specification File	apiName	Annex
ETN_Configuration	8.1.1	Event triggered network slice configuration	TS24549_ETC_Configuration.yaml	su_nsc	C.2
NSCE_SliceInfo	8.3.1	Notification of slice information	TS24549_NSCE_SliceInfo.yaml	nsce_sliceinfo	C.3

### 7.2 Network slice adaptation service

#### 7.2.1 Service description

##### 7.2.1.1 Overview

The network slice adaptation procedure is a SEAL service of providing network slice capability enablement capabilities for network slice re-mapping from one VAL service to one or more other VAL services, according to 3GPP TS 23.434 [2] and 3GPP TS 23.435 [13]. The network server entity, providing the functionality for the network slice re-mapping, acts as an AF communicating with 5GCN to provide guidance to update and modify the S-NSSAIs and the DNNs of the route selection descriptors of the URSP rules, 3GPP TS 24.526 [3], for one or more application traffics per UE.

NOTE: In this release, S-NSSAI and DNN are only used as the route selection descriptor.

#### 7.2.2 Service operations

##### 7.2.2.1 Introduction

The service operation, defined for ETN\_Configuration API for network capability configuration, is shown in table 7.2.2.1-1.

**Table 7.2.2.1-1: Operations for network capability configuration**

Service operation name	Description	Initiated by
Event_Triggered_Network_Slice_Adaptation	This service operation is used by SNSCE-C to trigger the event of the network slice configuration.	SNSCE-C

## 7.2.2.2 Event\_Triggered\_Network\_Slice\_Adaptation

### 7.2.2.2.1 General

These clauses describe the procedures on the SNSCE-C and SNSCE-S side when an event triggered request for network slice configuration is sent by the SNSCE-C to the SNSCE-S. The event triggered network slice configuration request causes a network slice adaptation and sent by the SNSCE-C acting as application client requesting a new or a change in network slice configuration.

#### 7.2.2.2.2 Network slice adaptation using Event\_Triggered\_Network\_Slice\_Adaptation service operation

To request for the network slice adaptation, the SNSCE-C shall send an HTTP PUT request message according to procedures specified in IETF RFC 9110 [8]. In the HTTP PUT request message, the SNSCE-C:

NOTE 1: How the requested network slice is known by the SNSCE-C is out of scope of this release.

- a) shall set the Request-URI to the URI identifying the SNSCE-S according to the pattern "{apiRoot}/su\_nsc/val-services/{valServiceId}/configurations/{configurationId}", where:
  - 1) {valServiceId} set to the identity of the VAL application; and
  - 2) {configurationId} set to the identity of slice adaptation configuration,
- b) shall set the "Host" header field to the URI identifying of SNSCE-S and the port information;
- c) shall include an Authorization header field with the "Bearer" authentication scheme set to an access token of the "bearer" token type as specified in IETF RFC 6750 [7]; and
- d) shall include a body containing the data type NwSliceAdptEvent as defined in clause 8.1.1.6.2.2,

Upon receipt an HTTP PUT request:

- a) with a Request-URI according to "{apiRoot}/su\_nsc/val-services/{valServiceId}/configurations/{configurationId}" identifying:
  - 1) "valServiceId" identifying the VAL application; and
  - 2) "configurationId" identifying the slice adaptation configuration; and
- b) with a body containing the data type NwSliceAdptEvent as defined in clause 8.1.1.6.2.2, the SNSCE-S shall determine the sender identity of the sender is authorized or not as specified in 3GPP TS 24.547 [4].

If:

- a) the sender is not an authorized user, the SNSCE-S shall respond with an HTTP 403 (Forbidden) response message and avoid the rest of steps; or
- b) the sender is an authorized user, the SNSCE-S:
  - 1) shall attempt to update the network S-NSSAI for one or more VAL UEs with the identities listed in the VAL UE list for the VAL service, identified by VAL service ID by using the parameters for requested S-NSSAI, requested DNN, and requested application requirements from the HTTP PUT request message;

NOTE 2: To update the application traffic, the SNSCE-S can act as an AF and use the reference point N33 as shown in 3GPP TS 23.434 [2] to influence a VAL UE's URSP rules for the application traffic by providing a guidance on the route selection parameters S-NSSAI and DNN as described in clause 4.15.6.10 of 3GPP TS 23.502 [2A].

NOTE 3: Whether and how the SNSCE-S can update the network S-NSSAI for all VAL UEs for the VAL service, is out of the scope of this release.

- 2) shall send the updated network S-NSSAI and any DNN to the PCF, if the update is successful, 3GPP TS 23.434 [2]; and
- 3) shall send:
  - i) if the request is successfully processed, an HTTP 204 No Content response message indicating the successful status; or
  - ii) if errors occur when processing the request, request, an appropriate error response as specified in clause 8.1.1.7.

## 7.3 Retrieval of data and information

### 7.3.1 Service description

#### 7.3.1.1 Overview

The network slice capability enablement procedures is a SEAL service of providing slice capabilities based on 5GS management system services and 5GS network services, according to 3GPP TS 23.435 [13] e.g., retrieving the KQI data of services, the QoE data, the end user information and fault reports from NSCE client, notifying the slice modification and delivering slice information to NSCE client.

The procedures on how the NSCE server retrieves network and service related KQI or performance data, QoE data, and fault information from the NSCE client apply for the following NSCE procedures:

- a) network slice related performance and analytics monitoring job creation request procedure specified in 3GPP TS 23.435 [13] clause 9.7.2.1;
- b) information collection from NSCE server(s) subscribe request and response procedure specified in 3GPP TS 23.435 [13] clause 9.8.2.1;
- c) network slice fault management capability exposure procedure specified in 3GPP TS 23.435 [13] clause 9.15.2.1; and
- d) slice requirements verification and alignment capability exposure procedure specified in 3GPP TS 23.435 [13] clause 9.16.2.1.

The procedures at the SNSCE-C and SNSCE-S side follow the mechanism specified in clause 5.5 of 3GPP TS 26.531 [15] and HTTP procedures specified in clause 4.3 and clause 7 of 3GPP TS 26.532 [16]. In the procedures, the SNSCE-C acts as the data collection client, and the SNSCE-S acts as data collection AF.

### 7.3.2 Service operations

#### 7.3.2.1 Introduction

The service operations, defined for the APIs of data collection and reporting service specified in 3GPP TS 26.532 [16], for retrieval of data and information, is shown in table 7.3.2.1-1.

**Table 7.3.2.1-1: Operations for retrieval of data and information**

<b>Service operation name</b>	<b>Description</b>	<b>Initiated by</b>
Ndcaf_DataReporting_CreateSession	This service operation is used by SNSCE-C to obtain the configuration of the requested data and information for retrieval.	SNSCE-C
Ndcaf_DataReporting_RetrieveSession	This service operation is used by SNSCE-C to update the configuration of the requested data and information for retrieval.	SNSCE-C
Ndcaf_DataReporting_Report	This service operation is used by SNSCE-C to report the requested data and information for retrieval.	SNSCE-C

## 7.3.2.2 Ndcaf\_DataReporting\_CreateSession

### 7.3.2.2.1 General

These clauses describe the procedures on the SNSCE-C and SNSCE-S side when a request for obtaining the configuration of the requested data and information for retrieval, is sent by the SNSCE-C to the SNSCE-S.

#### 7.3.2.2.2 Configuration of the requested data and information retrieval using Ndcaf\_DataReporting\_CreateSession service operation

In order to obtain the configuration of requested data and information for retrieval, the SNSCE-C shall send an HTTP POST request message to invoke Ndcaf\_DataReporting\_CreateSession service operation as described in clause 3.3.2.2 and clause 7.2.2.3.1 of 3GPP TS 26.532 [16].

Upon receipt an HTTP POST request message on Ndcaf\_DataReporting\_CreateSession service operation, the SNSCE-S shall send HTTP "201 Created" status code and provide the configuration of requested data and information for retrieval as described in clause 4.3.2.2 and clause 7.2.2.3.1 of 3GPP TS 26.532 [16].

## 7.3.2.3 Ndcaf\_DataReporting\_RetrieveSession

### 7.3.2.3.1 General

These clauses describe the procedures on the SNSCE-C and SNSCE-S side when a request for updating the configuration of the requested data and information for retrieval, is sent by the SNSCE-C to the SNSCE-S.

#### 7.3.2.3.2 Updated configuration of the requested data and information retrieval using Ndcaf\_DataReporting\_RetrieveSession service operation

In order to update the configuration of requested data and information for retrieval, the SNSCE-C may send an HTTP GET request message to invoke Ndcaf\_DataReporting\_RetrieveSession service operation as described in clause 4.3.2.3 and clause 7.2.3.3.1 of 3GPP TS 26.532 [16].

Upon receipt an HTTP GET request message on Ndcaf\_DataReporting\_RetrieveSession service operation, the SNSCE-S shall send HTTP "201 Created" status code and provide the updated configuration, if available, as described in clause 4.3.2.3 and clause 7.2.3.3.1 of 3GPP TS 26.532 [16].

## 7.3.2.4 Ndcaf\_DataReporting\_Report

### 7.3.2.4.1 General

These clauses describe the procedures on the SNSCE-C and SNSCE-S side when a request for reporting the configuration of the requested data and information for retrieval, is sent by the SNSCE-C to the SNSCE-S.

#### 7.3.2.4.2 Reporting the requested data and information retrieval using Ndcnf\_DataReporting\_Report service operation

After the configuration, the SNSCE-C shall send an HTTP POST request message in accordance with this configuration to invoke Ndcnf\_DataReporting\_Report service operation as described in clause 4.3.3 and clause 7.2.3.4.1 of 3GPP TS 26.532 [16].

Upon receipt an HTTP POST request message on Ndcnf\_DataReporting\_Report service operation, the SNSCE-S shall send HTTP "204 No Content" status code and may provide the updated configuration as described in clause 4.3.3 and clause 7.2.3.4.1 of 3GPP TS 26.532 [16].

## 7.4 Notification of slice information service

### 7.4.1 Service description

Notification of slice information service allows the SNSCE-S to notify the SNSCE-C of the network slice information to extend the slice availability for the VAL service continuity.

### 7.4.2 Service operations

#### 7.4.2.1 Introduction

The service operations defined for the notification of slice information service, are shown in table 7.4.2.1-1.

**Table 7.4.2.1-1: Operations of slice information service**

Service Operation Name	Description	Initiated by
EDN_Slice_Information	This service operation is used by SNSCE-S to notify SNSCE-C the information for the required network slice for the VAL service continuity in the target EDN service area if the SNSCE-C is expected to leave the source EDN service area.	e.g. SNSCE-S
InterPLMN_Slice_Information	This service operation is used by SNSCE-S to notify SNSCE-C the information for the required network slice for the VAL service continuity in the target PLMN at the time of inter-PLMN mobility.	e.g. SNSCE-S

#### 7.4.2.2 EDN\_Slice\_Information

##### 7.4.2.2.1 General

This service operation is used by the SNSCE-S to notify the SNSCE-C the slice network information to extend the VAL service continuity in the target EDN service area if the SNSCE-C is expected to leave the source EDN service area due to its mobility.

##### 7.4.2.2.2 Subscribe

This is a pseudo operation, the SNSCE-C does not actually provide Subscribe service operation through the service. The notification URI is provided during the configuration update event subscription message specified in 3GPP TS 24.546 [3A] clause 6.2.2.1.2 and clause A.1.2.

##### 7.4.2.2.3 Notification of slice information using EDN\_Slice\_Information service operation

To notify the SNSCE-C of the network slice information, which is to be used to extend the VAL service continuity in the target EDN service area if the SNSCE-C is expected or predicted to leave the source EDN service area due to its mobility, the SNSCE-S shall send an HTTP POST request to {callbackUri}, with the request body containing the EdgeSCRequirementNotif data structure, defined in 3GPP TS 29.435 [18].

Upon receipt of the HTTP POST request, the SNSCE-C shall return to the SNSCE-S:

- a) if success, an HTTP 204 No Content status code; or
- b) if failure, an appropriate HTTP status code indicating the error.

### 7.4.2.3 InterPLMN\_Slice\_Information

#### 7.4.2.3.1 General

This service operation is used by the SNSCE-S to notify the SNSCE-C the slice network information to extend the VAL service continuity in the target PLMN at the time of inter-PLMN mobility.

#### 7.4.2.3.2 Subscribe

This is a pseudo operation, the SNSCE-C does not actually provide Subscribe service operation through the service. The notification URI is provided during the configuration update event subscription message specified in 3GPP TS 24.546 [3A] clause 6.2.2.1.2 and clause A.1.2.

#### 7.4.2.3.3 Notification of slice information using InterPLMN\_Slice\_Information service operation

To notify the SNSCE-C of the network slice information, which is to be used to extend the VAL service continuity in the target PLMN during the inter PLMN mobility, the SNSCE-S shall an HTTP POST request to {callbackUri}, with the request body containing the InterPlmnServContNotif data structure, defined in 3GPP TS 29.435 [18].

Upon receipt of the HTTP POST request, the SNSCE-C shall return to the SNSCE-S:

- a) if success, an HTTP 204 No Content status code; or
- b) if failure, an appropriate HTTP status code indicating the error.

## 7.5 Network slice information delivery

### 7.5.1 Service description

Network slice information delivery is a SEAL service reusing the notification procedure to send the allocated network slice information to a VAL UE. The notification of the allocated network slice information is sent by the SNSCE-S to the SNSCE-C and is then forwarded to the VAL client by the SNSCE-C.

### 7.5.2 Service operations

#### 7.5.2.1 Introduction

The service operations, defined for NSCE\_SliceInfo API for notification of the allocated network slice information, is shown in table 7.5.2.1-1.

**Table 7.5.2.1-1: Operations for slice information delivery**

Service operation name	Description	Initiated by
Slice_Info_Delivery	This service operation is used by SNSCE-S to notify the SNSCE-C of the slice the allocated network slice information.	SNSCE-S

## 7.5.2.2 Slice\_Info\_Delivery

### 7.5.2.2.1 General

These clauses describe the procedures after network slice allocation in NSaaS model, a notification of the allocated network slice information, is sent by the SNSCE-S to the SNSCE-C. The notification helps the VAL UE to obtain the allocated network slice information for the VAL application identified by VAL service ID.

#### 7.5.2.2.2 Network slice information delivery using Slice\_Info\_Delivery service operation

To send the allocated network slice information to the SNSCE-C, the SNSCE-S shall send an HTTP POST request message according to procedures specified in IETF RFC 9110 [8] and according to pattern Callback-URI, defined in clause A.1.2 of 3GPP TS 24.546 [3A] with a body containing the data type NSInfoDel as defined in clause 8.3.1.3.6.2.2, serialized into a JavaScript Object Notation (JSON) structure as specified in IETF RFC 8259 [10].

Upon receipt of the HTTP POST request, the SNSCE-C:

- a) if the request is successfully processed, shall send an HTTP 204 No Content message indicating the successful response; or
- b) if errors occur when processing the request, an appropriate error response as specified in clause 8.3.1.3.7.

# 8 API Definitions

## 8.1 Event triggered network slice configuration APIs

### 8.1.1 ETN\_Configuration API

#### 8.1.1.1 Introduction

The information in this clause provides a description for the HTTP parameters transmitted by the SNSCE-C to the SNSCE-S to trigger a network slice configuration such as the network slice adaptation for one or more VAL UEs within a VAL service.

The ETN\_Configuration service shall use the ETC\_Configuration API in Annex C.2.

The HTTP URIs used in HTTP protocol for the event triggered network (ETN) slice configuration service shall have the resource URI structure as defined in clause 5.2.4 of 3GPP TS 29.122 [17]:

**{apiRoot}/<apiName>/<apiVersion>/<apiSpecificSuffixes>**

where:

- a) {apiRoot} shall be set as described in clause 5.2.4 of 3GPP TS 29.122 [17];
- b) <apiName> shall be "su\_nsc";
- c) <apiVersion> shall be "v1"; and
- d) <apiSpecificSuffixes> shall be set as described in clause 8.1.1.3.

#### 8.1.1.2 Usage of HTTP

##### 8.1.1.2.1 General

For SNSCE service configuration API, support of HTTP/1.1 (IETF RFC 9110 [8], IETF RFC 9111 [8A] and IETF RFC 9112 [8B]) over TLS is mandatory and support of HTTP/2 (IETF RFC 9113 [8C]) over TLS is recommended.

A functional entity desiring to use HTTP/2 shall use the HTTP upgrade mechanism to negotiate applicable HTTP version as described in IETF RFC 9113 [8C].

### 8.1.1.2.2 Content type


The bodies of HTTP request and successful HTTP responses shall be encoded in JSON format (see IETF RFC 8259 [10]).

The MIME media type that shall be used within the related Content-Type header field is "application/json", as defined in IETF RFC 8259 [10].

### 8.1.1.3 Resources

#### 8.1.1.3.1 Overview

The Resource URI structure of the ETN\_Configuration API is as shown in Figure 8.1.1.3.1-1:

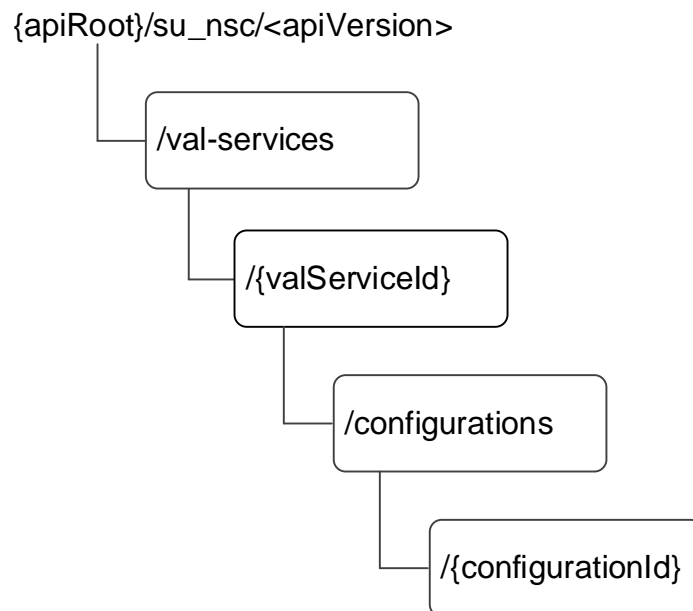

**Figure 8.1.1.3.1-1: Resource URI structure of the ETN\_Configuration API**

Table 8.1.1.3.1-1 provides an overview of the resources and applicable HTTP method.

**Table 8.1.1.3.1-1: Resources and method overview**

Resource name	Resource URI	HTTP method	Description
Configuration	/val-services/{valServiceId}/configurations/{configurationId}	PUT (NOTE)	Performs configuration.
NOTE: In this release, the only configuration is the slice adaptation as described in 3GPP TS 23.434 [2].			

#### 8.1.1.3.2 Resource: Configuration

##### 8.1.1.3.2.1 Description

The Configuration resource allows an SNSCE-C a specific configuration identified by the identity "configurationId".

## 8.1.1.3.2.2 Resource definition

Resource URI: {apiRoot}/su\_nsc/<apiVersion>/val-services/{valServiceId}/configurations/{configurationId}

This resource shall support the resource URI variables defined in the table 8.1.1.3.2.2-1.

**Table 8.1.1.3.2.2-1: Resource URI variables for this resource**

Name	Data Type	Definition
apiRoot	string	See clause 5.2.4 of 3GPP TS 29.122 [17].
apiVersion	string	See clause 5.2.4 of 3GPP TS 29.122 [17].
valServiceId	string	Identifier of a VAL service.
configurationId	string	Identifier of a configuration

## 8.1.1.3.2.3 Resource standard methods

## 8.1.1.3.2.3.1 PUT

This operation is for triggering network slice adaptation event and shall support the URI query parameters specified in table 8.1.1.3.2.3.1-1.

**Table 8.1.1.3.2.3.1-1: URI query parameters supported by the PUT method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 8.1.1.3.2.3.1-2 and the response data structures and response codes specified in table 8.1.1.3.2.3.1-3.

**Table 8.1.1.3.2.3.1-2: Data structures supported by the PUT Request Body on this resource**

Data type	P	Cardinality	Description
NwSliceAdptEvent	M	1	Triggering the network slice adaptation event.

**Table 8.1.1.3.2.3.1-3: Data structures supported by the PUT Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a	M	1	204 No Content	The configuration of the VAL UEs with VAL UE List within the VAL service identified by the value "valServiceId" and for the network slice configuration identified by the value "configurationId", was successful.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI representing an alternative SNSCE-S to which the request should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [17].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI representing an alternative SNSCE-S to which the request should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [17].

NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.6-1 of 3GPP TS 29.122 [17] shall also apply.

**Table 8.1.1.3.2.3.1-3: Headers supported by 307 Response Code for this operation**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing an alternative NSCE server to which the request should be redirected.

**Table 8.1.1.3.2.3.1-4: Headers supported by 308 Response Code for this operation**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing an alternative NSCE server to which the request should be redirected.

#### 8.1.1.3.2.4 Resource Custom Operations

None.

#### 8.1.1.4 Custom Operations without associated resources

There are no custom operations without associated resources defined for this API in this release of the specification.

#### 8.1.1.5 Notifications

None.

#### 8.1.1.6 Data model

##### 8.1.1.6.1 General

This clause specifies the application data model supported by the API.

Table 8.1.1.6.1-1 specifies the data types defined for the ETN\_Configuration API.

**Table 8.1.1.6.1-1: ETN\_Configuration API specific Data Types**

Data type	Clause defined	Description	Applicability
AppReqs	8.1.1.6.2.3	Represents requirements for the requested application	
NwSliceAdptEvent	8.1.1.6.2.2	Event triggered network slice adaptation	

Table 8.1.1.6.1-2 specifies data types re-used by the ETN\_Configuration API service.

**Table 8.1.1.6.1-2: Re-used Data Types**

Data type	Reference	Comments	Applicability
Dnn	3GPP TS 29.571 [14]	Used to Identify a DNN.	
DurationSec	3GPP TS 29.122 [17]	Represents a period of time in units of seconds.	
LocationArea	3GPP TS 29.122 [17]	Represents location information.	
RatType	3GPP TS 29.571 [14]	Identifies the RAT Type.	
Snssai	3GPP TS 29.571 [14]	Used to Identify the S-NSSAI.	
ValTargetUe	3GPP TS 29.549 [20]	Used to indicate either VAL User ID or VAL UE ID.	

#### 8.1.1.6.2 Structured data types

##### 8.1.1.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

## 8.1.1.6.2.2 Type: NwSliceAdptEvent

**Table 8.1.1.6.2.2-1: Definition of type NwSliceAdptEvent**

Attribute name	Data type	P	Cardinality	Description	Applicability
valUelds	array(ValTargetUe)	M	1..N	One or more VAL UEs, for which a given event triggered network slice configuration applies. The VAL service is identified by the value "valServiceId" and the network slice configuration is identified by the value "configurationId".	
sliceld	Snsai	M	1	The identifier of the slice or slice instance, to which the event triggered network slice adaptation is applied.	
dnn	Dnn	O	0..1	Requested DNN	
appReqs	AppReqs	O	0..1	Requirement related to the requested application	

## 8.1.1.6.2.3 Type: AppReqs

**Table 8.1.1.6.2.3-1: Definition of type AppReqs**

Attribute name	Data type	P	Cardinality	Description	Applicability
timeIntervals	array(DurationSec)	O	1..N	The requested time intervals as the start time and end time.	
area	LocationArea	O	0..1	The requested geographical or service area.	
ratType	RatType	O	0..1	The requested access type.	

## 8.1.1.6.3 Simple data types and enumerations

None.

## 8.1.1.6.4 Data types describing alternative data types or combinations of data types

There are no data types describing alternative data types or combinations of data types defined for this API in this release of the specification.

## 8.1.1.6.5 Binary data

## 8.1.1.6.5.1 Binary Data Types

**Table 8.1.1.6.5.1-1: Binary Data Types**

Name	Clause defined	Content type

## 8.1.1.7 Error Handling

## 8.1.1.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [17].

In addition, the requirements in the following clauses shall apply.

## 8.1.1.7.2 Protocol Errors

In this release of the specification, there are no additional protocol errors applicable for the ETN\_Configuration API.

### 8.1.1.7.3 Application Errors

The application errors defined for ETN\_Configuration API are listed in table 8.1.1.7.3-1.

**Table 8.1.1.7.3-1: Application errors**

Application Error	HTTP status code	Description	Applicability

### 8.1.1.8 Feature Negotiation

General feature negotiation procedures are defined in clause 5.2.7 of 3GPP TS 29.122 [17]. Table 8.1.1.8-1 lists the supported features for ETN\_Configuration API.

**Table 8.1.1.8-1: Supported Features**

Feature number	Feature Name	Description

### 8.1.1.9 Security

#### 8.1.1.9.1 General

Usage of HTTP over TLS and the TLS profiles shall be as specified in clause 5.1.1.4 of 3GPP TS 33.434 [21].

## 8.2 Data collection and reporting APIs

### 8.2.1 Ndcap\_DataReporting API

3GPP TS 26.532 [16] specifies Ndcap\_DataReporting API for Ndcap\_DataReporting service which includes:

- Ndcap\_DataReporting\_CreateSession service operation;
- Ndcap\_DataReporting\_RetrieveSession service operation; and
- Ndcap\_DataReporting\_Report service operation.

## 8.3 Service continuity notification APIs

### 8.3.1 NSCE\_SliceInfo API

#### 8.3.1.1 Introduction

The NSCE\_SliceInfo service shall use the NSCE\_SliceInfo API.

The API URI of the NSCE\_SliceInfo API shall have the resource URI structure as defined in clause 5.2.4 of 3GPP TS 29.122 [17]:

**{apiRoot}/<apiName>/<apiVersion>/<apiSpecificSuffixes>**

where:

- a) {apiRoot} shall be set as described in clause 5.2.4 of 3GPP TS 29.122 [17];
- b) <apiName> shall be "nsce\_sliceinfo";
- c) <apiVersion> shall be "v1"; and

d) <apiSpecificSuffixes> shall be set as described in clause 8.3.1.3.

## 8.3.1.2 Usage of HTTP

### 8.3.1.2.1 General

For NSCE\_SliceInfo API, support of HTTP/1.1 (IETF RFC 9110 [8], IETF RFC 9111 [8A] and IETF RFC 9112 [8B]) over TLS is mandatory and support of HTTP/2 (IETF RFC 9113 [8C]) over TLS is recommended.

A functional entity desiring to use HTTP/2 shall use the HTTP upgrade mechanism to negotiate applicable HTTP version as described in IETF RFC 9113 [8C].

### 8.3.1.2.2 Content type

The bodies of HTTP request and successful HTTP responses shall be encoded in JSON format (see IETF RFC 8259 [10]).

The MIME media type that shall be used within the related Content-Type header field is "application/json", as defined in IETF RFC 8259 [10].


## 8.3.1.3 Resources

### 8.3.1.3.1 Overview

This clause describes the structure for the Resource URIs and the resources and methods used for the service.

The structure of the Resource URIs of the NSCE\_SliceInfo API is shown in Figure 8.3.1.3.1-1.

{apiRoot}/nsce\_sliceinfo/<apiVersion>

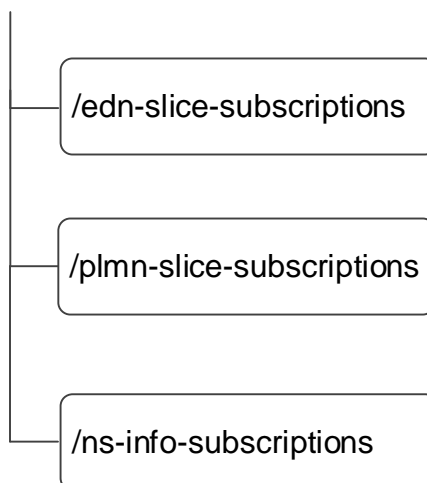

**Figure 8.3.1.3.1-1: Resource URIs structure of the NSCE\_SliceInfo API**

Table 8.3.1.3.1-1 provides an overview of resources and applicable HTTP methods defined for the NSCE\_SliceInfo API.

**Table 8.3.1.3.1-1: Resources and methods overview**

Resource purpose/name	Resource URI (relative path after API URI)	HTTP method or custom operation	Description (service operation)
EDN Slice Subscriptions (Collection)	/edn-slice-subscriptions	POST	This is a pseudo resource.
PLMN Slice Subscriptions (Collection)	/plmn-slice-subscriptions	POST	This is a pseudo resource.
NS Info Delivery Subscriptions (Collection)	/ns-info-subscriptions	POST	This is a pseudo resource.

### 8.3.1.3.2 Resource: EDN Slice Subscriptions

#### 8.3.1.3.2.1 Description

This is a pseudo resource.

#### 8.3.1.3.2.2 Resource Definition

Resource URI: {apiRoot}/nsce\_sliceinfo/<apiVersion>/edn-slice-subscriptions

This resource shall support the resource URI variables defined in table 8.3.1.3.2.2-1.

**Table 8.3.1.3.2.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 8.3.1.1

#### 8.3.1.3.2.3 Resource Standard Methods

##### 8.3.1.3.2.3.1 POST

This method shall support the URI query parameters specified in table 8.3.1.3.2.3.1-1.

**Table 8.3.1.3.2.3.1-1: URI query parameters supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 8.3.1.3.2.3.1-2 and the response data structures and response codes specified in table 8.3.1.3.2.3.1-3.

**Table 8.3.1.3.2.3.1-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
Any			

**Table 8.3.1.3.2.3.1-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a				
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [17] shall also apply.				

## 8.3.1.3.2.4 Resource Custom Operations

None.

## 8.3.1.3.3 Resource: PLMN Slice Subscriptions

## 8.3.1.3.3.1 Description

This is a pseudo resource.

## 8.3.1.3.3.2 Resource Definition

Resource URI: {apiRoot}/nsce\_sliceinfo/<apiVersion>/plmn-slice-subscriptions

This resource shall support the resource URI variables defined in table 8.3.1.3.3.2-1.

**Table 8.3.1.3.3.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 8.3.1.1

## 8.3.1.3.3.3 Resource Standard Methods

## 8.3.1.3.3.3.1 POST

This method shall support the URI query parameters specified in table 8.3.1.3.3.3.1-1.

**Table 8.3.1.3.3.3.1-1: URI query parameters supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 8.3.1.3.3.3.1-2 and the response data structures and response codes specified in table 8.3.1.3.3.3.1-3.

**Table 8.3.1.3.3.3.1-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
Any			

**Table 8.3.1.3.3.3.1-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a				
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [17] shall also apply.				

## 8.3.1.3.3.4 Resource Custom Operations

None.

## 8.3.1.3.3A Resource: PLMN Slice Subscriptions

## 8.3.1.3.3A.1 Description

This is a pseudo resource.

## 8.3.1.3.3A.2 Resource Definition

Resource URI: {apiRoot}/nsce\_sliceinfo/<apiVersion>/ns-info-subscriptions

This resource shall support the resource URI variables defined in table 8.3.1.3.3A.2-1.

**Table 8.3.1.3.3A.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 8.3.1.1

## 8.3.1.3.3A.3 Resource Standard Methods

## 8.3.1.3.3A.3.1 POST

This method shall support the URI query parameters specified in table 8.3.1.3.3A.3.1-1.

**Table 8.3.1.3.3A.3.1-1: URI query parameters supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 8.3.1.3.3A.3.1-2 and the response data structures and response codes specified in table 8.3.1.3.3A.3.1-3.

**Table 8.3.1.3.3A.3.1-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
any			

**Table 8.3.1.3.3A.3.1-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a				
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [17] shall also apply.				

## 8.3.1.3.4 Custom Operations without associated resources

None in this release of the specification.

## 8.3.1.3.5 Notifications

## 8.3.1.3.5.1 General

**Table 8.3.1.3.5.1-1: Notifications overview**

Notification	Callback URI	HTTP method	Description (service operation)
EDN slice notification	callbackUri (NOTE)	POST	Notification on slice modification information for service continuity of a VAL application in the target EDN service area.
PLMN slice notification	callbackUri (NOTE)	POST	Notification on slice modification information for service continuity of a VAL application in the target PLMN.
NS Info Delivery	callbackUri (NOTE)	POST	Notification on enabling a NSCE Server to deliver the network slice information.
NOTE: The callbackURI is not provided by NF service consumer via NSCE_SliceInfo API. The value of the callbackURI is set to the value of the Callback-URI parameter that is provided during the configuration update event subscription message specified in 3GPP TS 24.546 [3A] clause 6.2.2.1.2 and clause A.1.2.			

## 8.3.1.3.5.2 EDN slice notification

## 8.3.1.3.5.2.1 Description

EDN slice notification is used by the SNSCE-S to notify the SNSCE-C about the modified slice configuration for VAL service continuity in the target EDN service area.

## 8.3.1.3.5.2.2 Notification definition

The POST method shall be used for the EDN slice notification and the callback URI configured by SNSCE-S.

Callback URI: {callbackUri}

This method shall support the URI query parameters specified in table 8.3.1.3.5.2.2-1.

**Table 8.3.1.3.5.2.2-1: URI query parameters supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description
n/a				

If the notification is for EDN slice modification information, this method shall support the request data structures specified in table 8.3.1.3.5.2.2-2 and the response data structures and response codes specified in table 8.3.1.3.5.2.2-3.

**Table 8.3.1.3.5.2.2-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
EdgeSCRequirementNotif	M	1	Notification on slice modification information for a VAL service continuity in the target EDN service area.

**Table 8.3.1.3.5.2.2-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case. Notification for the slice modification information was successfully received.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [17] shall also apply.				

## 8.3.1.3.5.3 PLMN slice notification

## 8.3.1.3.5.3.1 Description

EDN slice notification is used by the SNSCE-S to notify the SNSCE-C about the modified slice configuration for VAL service continuity during the inter PLMN mobility.

## 8.3.1.3.5.3.2 Notification definition

The POST method shall be used for the EDN slice notification and the callback URI configured by SNSCE-S.

Callback URI: {callbackUri}

This method shall support the URI query parameters specified in table 8.3.1.3.5.3.2-1.

**Table 8.3.1.3.5.3.2-1: URI query parameters supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description
n/a				

If the notification is for inter-PLMNs slice modification information, this method shall support the request data structures specified in table 8.3.1.3.5.3.2-2 and the response data structures and response codes specified in table 8.3.1.3.5.3.2-3.

**Table 8.3.1.3.5.3.2-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
InterPlmnServContNotif	M	1	Notification on slice modification information for a VAL service continuity in the target PLMN.

**Table 8.3.1.3.5.3.2-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case. Notification for the slice information was successfully received.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [17] shall also apply.				

## 8.3.1.3.5.4 NS Info Delivery

## 8.3.1.3.5.4.1 Description

NS Info Delivery is used by the SNSCE-S to notify the SNSCE-C VAL UE to deliver the network slice information.

## 8.3.1.3.5.4.2 Notification definition

The POST method shall be used for the EDN slice notification and the callback URI configured by SNSCE-S.

Callback URI: {callbackUri}

This method shall support the URI query parameters specified in table 8.3.1.3.5.4.2-1.

**Table 8.3.1.3.5.4.2-1: URI query parameters supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description
n/a				

If the notification is for inter-PLMNs slice modification information, this method shall support the request data structures specified in table 8.3.1.3.5.4.2-2 and the response data structures and response codes specified in table 8.3.1.3.5.4.2-3.

**Table 8.3.1.3.5.4.2-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
NSInfoDel	M	1	Contains the parameters for Network Slice Information delivery

**Table 8.3.1.3.5.4.2-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case. Notification for the Network Slice Information delivery was successfully proceeded.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [17] shall also apply.				

### 8.3.1.3.6 Data Model

#### 8.3.1.3.6.1 General

This clause specifies the application data model supported by the API.

Table 8.3.1.3.6.1-1 specifies the data types defined for the NSCE\_SliceInfo API.

**Table 8.3.1.3.6.1-1: NSCE\_SliceInfo API specific Data Types**

Data type	Clause defined	Description	Applicability
NSInfo	8.3.1.3.6.2.3	Represents the network slice information	
NSInfoDel	8.3.1.3.6.2.2	Represents the network slice information delivery.	

Table 8.3.1.3.6.1-2 specifies data types re-used by the NSCE\_SliceInfo API from other specifications, including a reference to their respective specifications, and when needed, a short description of their use within the NSCE\_SliceInfo API.

**Table 8.3.1.3.6.1-2: NSCE\_SliceInfo API re-used Data Types**

Data type	Reference	Comments	Applicability
EdgeSCRequirementNotif	3GPP TS 29.435 [18]	Represents the slice information which is used and/or modified to extend slice availability to the target service area. (NOTE 1)	
EndPoint	3GPP TS 29.558 [20A]	Represents endpoint information.	
InterPlmnServContNotif	3GPP TS 29.435 [18]	Represents the slice information which is used and/or modified to extend slice availability to the target PLMN. (NOTE 2)	
NetSliceId	3GPP TS 29.435 [18]	Represents the identification information of a network slice.	
NOTE 1: The slice information is sent to the VAL UEs which are impacted by the modification of the network slice, thus the related optional information element "uelds" of the EdgeSCRequirementNotif data structure shall not be used when the EdgeSCRequirementNotif data structure is sent to the SNSCE-C by the SNSCE-S.			
NOTE 2: The slice information is sent to the VAL UEs which are impacted by the modification of the network slice, thus the related optional information element "uelds" of the InterPlmnServContNotif data structure shall not be used when the InterPlmnServContNotif data structure is sent to the SNSCE-C by the SNSCE-S.			

### 8.3.1.3.6.2 Structured data types

#### 8.3.1.3.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

## 8.3.1.3.6.2.2 Type: NSInfoDel

**Table 8.3.1.3.6.2.2-1: Definition of type NSInfoDel**

Attribute name	Data type	P	Cardinality	Description	Applicability
valServId	string	M	1	Represents the identifier of the VAL service to which the notification is related.	
tgtNsceServId	string	M	1	Contains the identifier of the target NSCE Server.	
tgtNsceAddr	EndPoint	M	1	Contains the addressing information of the target NSCE Server.	
valUeIds	array(string)	O	1..N	Contains the identifiers of the targeted VAL UE(s).	
nSInfos	array(NSInfo)	M	1..N	Network slice information	

## 8.3.1.3.6.2.3 Type: NSInfo

**Table 8.3.1.3.6.2.3-1: Definition of type NSInfo**

Attribute name	Data type	P	Cardinality	Description	Applicability
netSliceId	NetSliceId	M	1	Contains the identifier for the network slice.	
dnn	Dnn	O	0..1	Identifies a DNN, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only.	

## 8.3.1.3.7 Error Handling

## 8.3.1.3.7.1 General

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [17].

In addition, the requirements in the following clauses shall apply.

## 8.3.1.3.7.2 Protocol Errors

In this release of the specification, there are no additional protocol errors applicable for the NSCE\_SliceInfo API.

## 8.3.1.3.7.3 Application Errors

The application errors defined for NSCE\_SliceInfo API are listed in table 8.3.1.3.7.3-1.

**Table 8.3.1.3.7.3-1: Application errors**

Application Error	HTTP status code	Description	Applicability

## 8.3.1.3.8 Feature Negotiation

General feature negotiation procedures are defined in clause 5.2.7 of 3GPP TS 29.122 [17]. Table 8.3.1.3.8-1 lists the supported features for NSCE\_SliceInfo API.

**Table 8.3.1.3.8-1: Supported Features**

Feature number	Feature Name	Description

### 8.3.1.3.9 Security

#### 8.3.1.3.9.1 General

Usage of HTTP over TLS and the TLS profiles shall be as specified in clause 5.1.1.4 of 3GPP TS 33.434 [21].

---

## 9 Usage of common API framework

### 9.1 General

Usage of common API framework shall be supported by the event triggered network slice configuration service API as described in clause 8 in 3GPP TS 29.549 [20].

## Annex A (normative): Void

## Annex B (normative): Void

# Annex C (normative): OpenAPI specification

## C.1 General

This annex is based on the OpenAPI Specification [22] and provides corresponding representations of all APIs defined in the present specification in YAML format.

This Annex shall take precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API.

**NOTE:** The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification file contained in this 3GPP Technical Specification are available on a Git-based repository that uses the GitLab software version control system (see clause 5B of the 3GPP TR 21.900 [1A] and clause 5.3.1 of the 3GPP TS 29.501 [19] for further information).

## C.2 ETC\_Configuration API

```
openapi: 3.0.0
```

```
info:
```

```
  title: ETC_Configuration
  version: 1.1.0
  description: |
    API for event triggered network slice adaptation configuration.
    © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
```

```
externalDocs:
```

```
  description: >
    3GPP TS 24.549 V19.1.0 Application Data Analytics Enablement Service; Stage 3.
  url: https://www.3gpp.org/ftp/Specs/archive/24_series/24.549/
```

```
security:
```

```
- {}
- oAuth2ClientCredentials: []
```

```
servers:
```

```
- url: '{apiRoot}/su_nsc/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.
```

```
paths:
```

```
/val-services/{valServiceId}/configurations/{configurationId}:
  put:
    description: >
      Perfomrs event triggered network slice adaptation.
    operationId: EventTriggeredNetworkAdaptation
    tags:
      - Event triggered network adaptation (Document)
    parameters:
      - name: valServiceId
        description: String identifies a VAL service resource.
        in: path
        required: true
        schema:
          type: string
      - name: configurationId
        description: String identifies a configuration resource.
        in: path
        required: true
        schema:
```

```

    type: string
  requestBody:
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NwSliceAdptEvent'
  responses:
    '204':
      description: >
        No Content. The requested network slice adaptation is successfully processed.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

schemas:
  NwSliceAdptEvent:
    description: >
      Represents the event associated with triggered network slice adaptation
      with the underlying network.
    type: object
    properties:
      valueIds:
        type: array
        minItems: 1
        items:
          $ref: 'TS29549_SS_UserProfileRetrieval.yaml#/components/schemas/ValTargetUe'
      sliceId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      dnn:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
      appReqs:
        $ref: '#/components/schemas/AppReqs'
    required:
      - valueIds
      - sliceId

  AppReqs:
    description: Represents requirements for the requested application.
    type: object
    properties:
      timeIntervals:
        type: array
        minItems: 1
        items:
          $ref: 'TS29122_CommonData.yaml#/components/schemas/DurationSec'

```

```

area:
  $ref: 'TS29122_CommonData.yaml#/components/schemas/LocationArea'
ratType:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/RatType'

```

## C.3 NSCE\_SliceInfo API

openapi: 3.0.0

```

info:
  title: NSCE_SliceInfo
  version: 1.1.0
  description: |
    API for notification of slice information.
    © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: >
    3GPP TS 24.549 V19.1.0 Network slice capability enablement- Service Enabler;
    Architecture Layer for Verticals (SEAL); Protocol specification; Stage 3.
  url: https://www.3gpp.org/ftp/Specs/archive/24_series/24.549/

security:
  - {}
  - oAuth2ClientCredentials: []

servers:
  - url: '{apiRoot}/nsce_sliceinfo/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122.

paths:
  /edn-slice-subscriptions:
    post:
      # This is a pseudo operation, NF service consumers shall NOT invoke this method!
      requestBody:
        required: true
        content:
          application/json:
            # Unspecified schema for the JSON body, since this is neither used by consumer nor by
            the producer.
            schema: {}
      responses:
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'
      callbacks:
        SliceNotification:
          '{callbackUri}':
            # The URI in {callbackUri} is not provided by SNSCE-C via NSCE_SliceInfo API in this
            Release.
            post:
              requestBody:
                required: true
                content:
                  application/json:
                    schema:
                      $ref:
' TS29435_NSCE_ServiceContinuity.yaml#/components/schemas/EdgeSCRequirementNotif'
      responses:
        '204':
          description: No Content, notification was succesfull.
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':

```

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/plmn-slice-subscriptions:
  post:
    # This is a pseudo operation, NF service consumers shall NOT invoke this method!
    requestBody:
      required: true
      content:
        application/json:
          # Unspecified schema for the JSON body, since this is neither used by consumer nor by
the producer.
          schema: {}
      responses:
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'
    callbacks:
      InterPlmnSliceNotification:
        '{callbackUri}':
          # The URI in {callbackUri} is not provided by SNSCE-C via NSCE_SliceInfo API in this
Release.
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref:
'TS29435_NSCE_InterPLMNContinuity.yaml#/components/schemas/InterPlmnServContNotif'
      responses:
        '204':
          description: No Content, notification was succesfull.
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29122_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29122_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29122_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/ns-info-subscriptions:
  post:
    # This is a pseudo operation, NF service consumers shall NOT invoke this method!
    requestBody:
      required: true
      content:

```

```

    application/json:
      # Unspecified schema for the JSON body, since this is neither used by consumer nor by
the producer.

```

```

    schema: {}
  responses:
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'
  callbacks:

```

```

    NSInfoDelivery:
      '{callbackUri}':
        # The URI in {callbackUri} is not provided by SNSCE-C via NSCE_SliceInfo API in this
Release.

```

```

  post:
    requestBody:
      required: true
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NSInfoDel'
    responses:
      '204':
        description: No Content, notification was succesfull.
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29122_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

```

```

schemas:
  NSInfoDel:
    description: Represents the network slice information delivery.
    type: object
    properties:
      valServId:
        type: string
      tgtNsceServId:
        type: string
      tgtNsceAddr:
        $ref: 'TS29558_Eees_EASRegistration.yaml#/components/schemas/EndPoint'
      valUeIds:
        type: array
        items:
          type: string
        minItems: 1
        description: Represents the list of VAL UEs ID.
      nSInfos:
        type: array
        items:

```

```
    $ref: '#/components/schemas/NSInfo'
  minItems: 1
  required:
  - valServId
  - tgtNsceServId
  - tgtNsceAddr
  - nSInfos

NSInfo:
  description: Represents the network slice information.
  type: object
  properties:
    netSliceId:
      $ref: 'TS29435_NSCE_PolicyManagement.yaml#/components/schemas/NetSliceId'
    dnn:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
  required:
  - netSliceId
```

## Annex D (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Re v	Cat	Subject/Comment	New version
2021-08	CT1#131-e	<a href="#">C1-214994</a>				TS skeleton for Network slice capability management - Service Enabler Architecture Layer for Verticals (SEAL); Protocol specification	0.0.0
2021-08	CT1#131-e	<a href="#">C1-214983</a>				Network slice capability management procedures	0.1.0
2021-08	CT1#131-e	<a href="#">C1-214993</a>				Requirements for functional entities	0.1.0
2021-10	CT1#132-e	<a href="#">C1-216124</a>				Correction of event triggered network slice adaptation procedure	0.2.0
2021-12	CT#94e					Creation of version 1.0.0 for CT#94 for information	1.0.0
2022-01	CT1#133-bis-e	<a href="#">C1-220187</a>				Definitions of terms and symbols for network slice capability enablement Spec.	1.1.0
2022-01	CT1#133	<a href="#">C1-220578</a>				Network slice adaptation	1.1.0
2022-01	CT1#133	<a href="#">C1-220579</a>				Resolving EN	1.1.0
2022-01	CT1#133	<a href="#">C1-220580</a>				General description for network slice capability enablement Spec	1.1.0
2022-01	CT1#133	<a href="#">C1-220581</a>				Scope for network slice capability enablement Spec	1.1.0
2022-01	CT1#133	<a href="#">C1-220618</a>				Replace management with enablement	1.1.0
2022-02	CT1#134	<a href="#">C1-221253</a>				Clarification on route selection descriptors	1.2.0
2022-03	CT1#95e	CP-220315				Specification presented for approval, v2.0.0	2.0.0
2022-03	CT#95e					TS 24.549 v17.0.0 created after CT#95e by MCC	17.0.0
2022-06	CT#96	CP-221217	0001	2	B	Authenticate of SNSCE-C identity	17.1.0
2022-06	CT#96	CP-221217	0002	3	B	CoAP encoding	17.1.0
2022-06	CT#96	CP-221217	0003	2	B	CoAP requirements for SNSCE-C	17.1.0
2022-06	CT#96	CP-221217	0004	1	B	CoAP requirements for SNSCE-S	17.1.0
2022-06	CT#96	CP-221217	0005	1	F	Re-order the reference	17.1.0
2022-06	CT#96	CP-221217	0006	2	B	SNSCE client CoAP procedure	17.1.0
2022-06	CT#96	CP-221217	0007	3	B	SNSCE server CoAP procedure	17.1.0
2022-06	CT#96	CP-221217	0008	1	F	HTTP parameters	17.1.0
2022-06	CT#96	CP-221217	0009	1	F	Modification of general descriptions	17.1.0
2022-06	CT#96	CP-221217	0010	1	F	SNSCE client HTTP procedure	17.1.0
2022-06	CT#96	CP-221217	0011	1	F	SNSCE server HTTP procedure	17.1.0
2022-09	CT#97e	CP-222150	0012	1	F	Added description and overview	17.2.0
2023-03	CT#99	CP-230233	0013		F	Requirements alignment and miscellaneous corrections	17.3.0
2023-12	CT#102	CP-233190	0015	2	F	Update to the obsoleted IETF HTTP RFCs	18.0.0
2024-03	CT#103	CP-240118	0016	1	B	Update the general description	18.1.0
2024-03	CT#103	CP-240118	0017	1	B	Add parameters to network slice adaptation trigger	18.1.0
2024-03	CT#103	CP-240118	0018	2	B	Update APIs for event triggered network slice configuration	18.1.0
2024-03	CT#103	CP-240118	0019	2	B	Retrieve data and information from NSCE client	18.1.0
2024-03	CT#103	CP-240118	0020	2	B	Notify slice modification in Inter-PLMN based slice service continuity	18.1.0
2024-06	CT#104	CP-241188	0022	1	F	HTTP resource representation and encoding for network slice configuration	18.2.0
2024-06	CT#104	CP-241188	0024	1	F	ETC_Configuration API	18.2.0
2024-06	CT#104	CP-241188	0025	1	B	Notify slice modification in edge based NSCE deployments	18.2.0
2024-06	CT#104	CP-241188	0021	2	F	Network slice capability enablement services	18.2.0
2024-06	CT#104	CP-241188	0023	3	F	CoAP resource representation and encoding for network slice configuration	18.2.0
2024-06	CT#104	CP-241188	0022	2	F	HTTP resource representation and encoding for network slice configuration	18.2.0
2024-06	CT#104	CP-241188	0035	1	F	Scope and General description	18.2.0
2024-06	CT#104	CP-241188	0029	1	B	EDN based service continuity service	18.2.0
2024-06	CT#104	CP-241188	0030	1	B	EDN based service continuity APIs definition	18.2.0
2024-06	CT#104	CP-241188	0031	1	F	NSCE_EdnSliceInfo API (YAML)	18.2.0
2024-06	CT#104					Missing attaching YAML file in previous version	18.2.1
2024-09	CT#105	CP-242192	0039	2	F	Remove UE IP address preservation indicator	18.3.0
2024-09	CT#105	CP-242212	0040		F	Update of info and externalDocs fields	18.3.0
2024-12	CT#106	CP-243243	0041	2	F	Correction to the ETC_Configuration API	18.4.0
2024-12	CT#106	CP-243291	0043	2	F	Correction on NS Info Delivery	18.4.0
2024-12	CT#106	CP-243285	0044		F	Update of info and externalDocs fields	18.4.0
2025-09	CT#109	CP-252135	0048	2	F	Corrections on the wrong API names	18.5.0
2025-09	CT#109	CP-252139	0047	1	F	Corrections on the ETC_Configuration API	19.0.0
2025-09	CT#109	CP-252171	0049		F	Update of info and externalDocs fields	19.0.0
2025-12	CT#110	CP-253105	0050		F	Corrections on the slice information delivery	19.1.0
2025-12	CT#110	CP-253130	0051		F	Update of info and externalDocs fields	19.1.0
2026-01						Corrected yaml files coding: to be encoded as UTF-8 without BOM	19.1.1

---

## History

<b>Version</b>	<b>Date</b>	<b>Status</b>
V19.0.0	January 2026	Publication
V19.1.1	February 2026	Publication