

# ETSI TS 126 254 V18.1.0 (2024-07)



**LTE;  
5G;  
Codec for Immersive Voice and Audio Services - Rendering  
(3GPP TS 26.254 version 18.1.0 Release 18)**



---

**Reference**

RTS/TSGS-0426254v10

---

**Keywords**

5G,LTE

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from the  
ETSI [Search & Browse Standards application](#).

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#).

Users should be aware that the present document may be revised or have its status changed,  
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to  
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our  
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	4
1 Scope .....	6
2 References .....	6
3 Definitions of terms, symbols and abbreviations .....	6
3.1 Terms.....	6
3.2 Symbols.....	6
3.3 Abbreviations .....	6
4 General .....	7
4.1 IVAS receiver side processing .....	7
4.2 IVAS rendering .....	7
5 Internal renderer .....	8
5.1 Overview .....	8
5.2 Time-Domain Renderer.....	9
5.3 Parametric Binauralizer and Parametric Stereo Renderer .....	9
5.4 Fast Convolution Binaural Renderer .....	10
5.5 Crend Binaural Renderer.....	10
6 External renderer .....	10
6.1 Overview .....	10
6.2 Time-Domain Renderer.....	10
6.3 Parametric Binauralizer and Parametric Stereo Renderer .....	10
6.4 Fast Convolution Binaural Renderer .....	11
6.5 Crend Binaural Renderer.....	11
7 Rendering interface .....	11
7.1 High-level rendering interface description .....	11
8 Rendering interface .....	11
<b>Annex A (normative):      Renderer control metadata processing tools .....</b>	<b>12</b>
<b>Annex B (informative):      Change history .....</b>	<b>12</b>
History .....	13

---

# Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

**might not** indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

**is** (or any other verb in the indicative mood) indicates a statement of fact

**is not** (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

---

# 1 Scope

The present document provides a comprehensive description of the rendering functions of the decoder/renderer for Immersive Voice and Audio Services (IVAS codec).

---

## 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 26.250: "Codec for Immersive Voice and Audio Services (IVAS); General overview".
- [3] 3GPP TS 26.251: "Codec for Immersive Voice and Audio Services (IVAS); C code (fixed-point)".
- [4] 3GPP TS 26.253: "Codec for Immersive Voice and Audio Services (IVAS); Detailed Algorithmic Description incl. RTP payload format and SDP parameter definitions".
- [5] 3GPP TS 26.258: "Codec for Immersive Voice and Audio Services (IVAS); C code (floating point)".
- [6] 3GPP TS 26.249: "Immersive Audio for Split Rendering Scenarios; Detailed Algorithmic Description of Split Rendering Functions".

---

## 3 Definitions of terms, symbols and abbreviations

### 3.1 Terms

For the purposes of the present document, the terms given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

**rendering:** a process of generating digital audio output from the decoded digital audio signal.

### 3.2 Symbols

Void.

### 3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

BRIR	Binaural Room Impulse Response
CPE	Channel Pair Element
EVS	Enhanced Voice Services
HRIR	Head-Related Impulse Response
HRTF	Head-Related Transfer Function

ISM	Individual Stream with Metadata
IVAS	Immersive Voice and Audio Services
MASA	Metadata Assisted Spatial Audio
MCT	Multi-channel Coding Tool
RTP	Real-Time Protocol
SCE	Single Channel Element
UE	User Equipment

## 4 General

### 4.1 IVAS receiver side processing

The codec for Immersive Voice and Audio Services is part of a framework comprising of an encoder, decoder, and renderer. An overview of the audio processing functions of the receive side of the codec is shown in Figure 4.1-1. This diagram is based on [2], with rendering features highlighted.

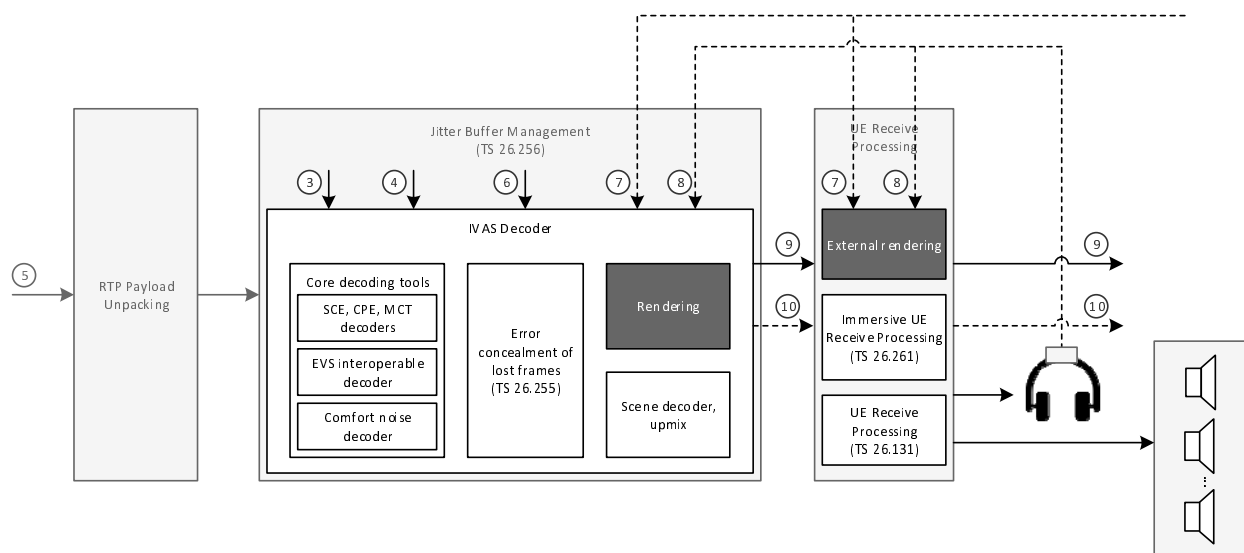


Figure 4.1-1: Overview of IVAS audio processing functions – receiver side.

#### Interfaces:

- 3: Encoded audio frames (50 frames/s), number of bits depending on IVAS codec mode
- 4: Encoded Silence Insertion Descriptor (SID) frames
- 5: RTP Payload packets
- 6: Lost Frame Indicator (BFI)
- 7: Renderer config data
- 8: Head-tracker pose information and scene orientation control data
- 9: Audio output channels (16-bit linear PCM, sampled at 8 (only EVS), 16, 32, or 48 kHz)
- 10: Metadata associated with output audio

Please note that the interface numbering is consistent with IVAS General Overview [2].

### 4.2 IVAS rendering

Rendering is the process of generating digital audio output from the decoded digital audio signal. Rendering is used when output format is different than input format. In case output format is the same as input format, the decoded audio channels are simply passed through to the output channels. Binaural rendering is a special case, where binaural output channels are prepared for headphone reproduction. This process includes head-tracking and scene orientation control, head-related transfer function processing, and room acoustic synthesis. Rendering for loudspeaker reproduction is also supported for preset or custom loudspeaker configurations.



IVAS rendering is available as an integral component of the IVAS decoder (internal renderer) or can be operated standalone as external rendering. The external renderer can be applied e.g., in the case of rendering outputs originating from multiple sources, such as decoders or audio streams.

IVAS rendering features reflect related design constraints, including:

- support for provisioning of HRIR/BRIR filter sets as control data for binaural rendering. The format of HRIR/BRIR data is provided in clause 5.10 of [5],
- support for default HRIR/BRIR sets for binaural rendering,
- support for head-tracking data as control data for binaural audio rendering in quaternions and in Euler notation. The format of head-tracking data is provided in clause 5.11 of [5],
- support for binaural reverb and early reflections controlled by reverb parameters, the format of reverb parameters is provided in clause 5.14.1, and in Annex B of [5].

A special feature of the renderer is that it supports split operation with pre-rendering and transcoding to a head-trackable intermediate representation that can be transmitted to a post-rendering end-device. This enables moving a large part of the processing load and memory requirements for IVAS decoding and rendering to a (more) capable node/UE while offloading the final rendering end-device. The IVAS specific split rendering functionality is mostly described in TS 26.253 [4] whereas more generic split rendering functionality is specified in TS 26.249 [6].

This document provides a high-level specification of the internal (clause 5) and external renderer (clause 6). Furthermore, the rendering library interface is provided (clause 7). Split rendering is described on high level in clause 8. Specific rendering algorithms and processing paths are out of scope of this specification and are provided in TS 26.253 [4].

---

## 5 Internal renderer

### 5.1 Overview

The internal IVAS renderer is integrated into the IVAS decoder. In case of specific operating points, this integration allows for combining decoding and rendering processes, resulting in efficient processing. The internal renderer supports rendering for loudspeaker and headphone reproduction. In the case of loudspeaker rendering, the audio output is mapped to the loudspeaker positions of the loudspeaker setup. In the case of headphone reproduction, binaural rendering is applied. The following binaural output modes are supported:

- Binaural output without room acoustic synthesis (no room), command line option BINAURAL,
- Binaural output with room acoustics synthesized using impulse responses (room with IR), command line option BINAURAL\_ROOM\_IR,
- Binaural output with room acoustics synthesized using parametric reverb, with or without early-reflections (room with reverb), command line option BINAURAL\_ROOM\_REVERB.

There are four binaural renderer implementations available in the IVAS codebase: parametric binaural renderer, FastConv renderer, Crend convolution renderer, and time-domain object renderer. The application of these renderers depends on IVAS input format, bitrate, IVAS encoding mode, and binaural rendering output mode. These dependencies are summarized in Table 5.1-1.

**Table 5.1-1: Input format to renderer mapping**

IVAS Input Format	Bitrate Range [kbps]	IVAS Mode (if applicable)	Binaural rendering output mode (if applicable)	Renderer Used
SBA	13.2 – 80	-	-	Parametric Binaural Renderer
SBA	96 – 512	-	-	FastConv Binaural Renderer
MASA	13.2 – 512	-	-	Parametric Binaural Renderer
ISM (3 or 4 objects)	24.4 – 32	ParamISM	-	Parametric Binaural Renderer
ISM	13.2 – 512	DiscISM	No room or room with reverb	Time Domain Object Renderer
ISM	13.2 – 512	DiscISM	Room with IR	Crend Binaural Renderer
MC	See Table 5.1-2	McMASA	-	Parametric Binaural Renderer
MC	See Table 5.1-2	ParamMC	-	FastConv Binaural Renderer
MC	See Table 5.1-2	ParamUpmix	-	FastConv Binaural Renderer
MC	See Table 5.1-2	DiscMC	All except below	Crend Binaural Renderer
MC Planar Layouts (5.1 and 7.1)	See Table 5.1-2	DiscMC	Head tracking enabled for either no room or room with reverb	Time Domain Object Renderer
OMASA	See text below	-	-	Same as non-combined format
OSBA	See text below	-	-	Same as non-combined format

The IVAS modes applicable for multi-channel input formats are summarized in Table 5.1-2. More details regarding multi-channel operation are provided in TS 26.253 [4] clause 5.7.

**Table 5.1-2: Multi-channel format and bitrate mapping to IVAS coding modes**

Bitrate [kbps]	MC layout				
	5.1	7.1	5.1.2	5.1.4	7.1.4
13.2 – 32	McMASA	McMASA	McMASA	McMASA	McMASA
48 – 80	ParamMC	ParamMC	ParamMC	McMASA	McMASA
96	DiscMC	ParamMC	ParamMC	ParamMC	McMASA
128	DiscMC	DiscMC	DiscMC	ParamMC	ParamMC
160	DiscMC	DiscMC	DiscMC	DiscMC	ParamUpmix
192 – 512	DiscMC	DiscMC	DiscMC	DiscMC	DiscMC

For the OMASA and OSBA cases, the IVAS coding modes depend on the number of objects and the total IVAS bitrate. For details refer to TS 26.253 [4] clause 5.9.2 and 6.9.7 for OMASA, and clause 5.8.1 and 6.8 for OSBA.

The details on binaural rendering algorithms are provided in TS 26.253 [4] clause 7.2.2.

## 5.2 Time-Domain Renderer

The time domain (TD) renderer operates on signals in time domain. In the IVAS internal renderer it is used for binaural rendering of discrete ISM, where each audio signal is encoded and decoded with a dedicated SCE module. This covers all ISM bit rates, except 3-4 objects for bit rates 24.4 kbps and 32 kbps. Further it is used in the decoder for binaural rendering of 5.1 and 7.1 signals when headtracking is enabled. An overview of the TD binaural renderer is found in Figure 7-2.1 in TS.26.253 [4]. An HRIR model accepts the object position metadata along with the headtracking data and generates an HRIR filter pair. The ITD may be modelled as a part of the HRIR, or it may be modelled as a separate parameter. In case an ITD parameter is output, the ITD is synthesis is performed in the ITD synthesis stage. The time aligned signals are then convolved with the HRIR filter pair to form a binauralized signal. Details are described in 7.2.2.2 in [4].

## 5.3 Parametric Binauralizer and Parametric Stereo Renderer

The parametric binauralizer and stereo renderer operates on the following IVAS formats and operations: MASA, OMASA, multi-channel (in McMASA mode), SBA, OSBA, and ISM, i.e., the input to the encoder has been audio signals (and potentially spatial metadata) in one of these formats, and it is now being rendered to binaural or stereo output. Details are described in 7.2.2.3 in [4].

## 5.4 Fast Convolution Binaural Renderer

The fast convolution binaural renderer operates on signals in the CLDFB domain. It is used for binaural rendering for the following IVAS formats and operating points (cf. Table 5.1-1): SBA (96 kbps upwards), OSBA and Multi-channel (ParamMC and ParamUpmix modes). Details are described in 7.2.2.4 in [4].

## 5.5 Crend Binaural Renderer

The Crend binaural renderer operates on signals in time domain. In the IVAS decoder, it is used for binaural rendering of multichannel signals, where each audio signal is encoded and decoded using discrete multi-channel mode or for discrete ISM with binaural output with room acoustics synthesized using impulse responses. The convolver uses a zero-delay block DFT implementation. DFT/IDFT is implanted using MDFT/IMDFT allowing buffer size being equal to the decoder frame size. Details are described in 7.2.2.5 in [4].

---

# 6 External renderer

## 6.1 Overview

The external IVAS renderer offers a standalone rendering capability employing the same rendering algorithms as the internal IVAS renderer. It is intended to receive the outputs of the IVAS decoder and further render them to other output formats. In addition, the IVAS external renderer is able to receive multiple different input streams that are rendered into a single output format. This provides a mixing functionality to use with multiple IVAS decoder outputs and a pre-renderer functionality for use before IVAS encoding. More details on pre-rendering algorithms are provided in TS 26.253 [4] clause 7.5.

The external IVAS renderer supports inputs of Ambisonics, ISM, multi-channel, and MASA format streams. The available output formats are binaural (with head-tracking and room effect options), Ambisonics, multi-channel, and MASA format (limited to pre-renderer mixing).

Supported input and output format mapping is provided in Table 6.1-1.

**Table 6.1-1: Supported pre-rendering input/output mapping**

Input format	Output Format			
	Channel based	SBA	MASA	Binaural
Channel based	•	•	•	•
SBA	•	• (mixing)	•	•
MASA	•	•	• (mixing)	•
ISM	•	•	•	•

In the case of rendering to binaural formats, the renderer implementations as discussed in clause 5.1 are used. Similarly to the case of internal rendering, binaural output modes with and without room acoustics are supported.

## 6.2 Time-Domain Renderer

In the external renderer the TD renderer is used for all ISM configurations, custom loudspeaker configurations, and multichannel formats 5.1 and 7.1 with headtracking enabled. Details are described in 7.2.2.2 in [4].

## 6.3 Parametric Binauralizer and Parametric Stereo Renderer

The parametric binauralizer and stereo renderer is used for the MASA input format in the external renderer. That is, if the output format is any form of binaural output or stereo output, then this renderer is used. Details of the renderer are described in 7.2.2.3 in [4].

## 6.4 Fast Convolution Binaural Renderer

Fast convolution rendering is currently not applicable for external rendering.

## 6.5 Crend Binaural Renderer

Crend binaural renderer (7.2.2.5 in [4]) is used when input format are SBA and MC except for rendering of MC formats 5.1 and 7.1 with headtracking enabled see 6.2.

---

# 7 Rendering interface

## 7.1 High-level rendering interface description

IVAS renderer and its interface provide support to IVAS codec design constraints. The rendering modes and rendering control mechanisms are discussed in clause of TS 26.253 [4].

The details of the rendering library API are provided in TS 26.251 [3] for the fixed-point code and TS 26.258 [5] for the floating-point code. The API functions of the IVAS rendering library provide access to the following groups of functionalities:

- Initialization,
- Configuration (input/output),
- Metadata (input/output),
- Audio (input/output),
- Head tracking and orientation tracking (input/output).

---

# 8 Rendering interface

IVAS supports split rendering wherein the process of binaural rendering and headtracking is split between a main device (pre-renderer) and a light-weight head-worn device (post-renderer). The split-rendering architecture in IVAS is such that the complexity at the post-renderer is substantially less than the complexity of the IVAS decoder and renderer.

There are two architectures of split rendering supported in IVAS. The first architecture extends IVAS decoder and internal renderer to perform the pre-rendering part of split renderer, whereas the post rendering is done using a separate post-renderer. In the second architecture, the IVAS decoder runs in pass-through mode and the IVAS external renderer is extended to perform the pre-rendering part of split renderer. The respective pre- and post-rendering functions are specified in [4] clauses 7.6.2 and 7.6.6.

Note that the latter architecture also applies to the case where a custom external renderer is connected to the IVAS decoder through the rendering interface. In that case, the external renderer can connect to pre-renderer functions according to [4], clause 7.6.8.

## Annex A (normative): Renderer control metadata processing tools

[A placeholder for the renderer control metadata processing scripts, including custom HRIR/BRIR conversion to binary format, etc. The actual scripts to be provided as Tdoc attachment.]

## Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-11	SA4#126	S4-231845				Initial version presented to SA4 for information	0.0.1
2023-11	SA4#126	S4-231969				Submitted to SA4 plenary for information	0.1.0
2023-12	SA#102	SP-231299				Version created by MCC	1.0.0
2024-01	SA4#127	S4-240230				Version presented to SA4 for approval	1.0.1
2024-02	SA4#127	S4-240326				Submitted to SA4 plenary for approval	1.1.0
2024-03	SA#103	SP-240026				Version 2.0.0 created by MCC	2.0.0
2024-03						Version 18.0.0 created by MCC	18.0.0
2024-06	SA#104	SP-240693	0001	-	B	Adding ISAR track-a split rendering feature	18.1.0
2024-06	SA#104					Change of TS title as approved by TSG SA in SP-240917	18.1.0

---

# History

<b>Document history</b>		
V18.0.0	May 2024	Publication
V18.1.0	July 2024	Publication