

ETSI TS 128 537 V19.4.0 (2026-02)



TECHNICAL SPECIFICATION

**5G;
Management and orchestration;
Management capabilities
(3GPP TS 28.537 version 19.4.0 Release 19)**



Reference

RTS/TSGS-0528537vj40

Keywords

5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#) repository.

Users should be aware that the present document may be revised or have its status changed, this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our [Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2026.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope	7
2 References	7
3 Definitions of terms, symbols and abbreviations	7
3.1 Terms.....	7
3.2 Symbols.....	7
3.3 Abbreviations	8
4 Heartbeat	8
4.1 Overview	8
4.2 Specification level requirements	8
4.2.1 Use cases.....	8
4.2.1.1 Configuring heartbeat notification periodicity	8
4.2.1.2 Requesting immediate heartbeat notification	9
4.2.1.3 Emitting periodic heartbeat notifications	9
4.2.2 Requirements	9
4.2.2.1 Requirements for controlling heartbeat.....	9
4.2.2.2 Requirements for notifying heartbeat.....	10
4.3 Procedures for heartbeat	10
4.3.0 Procedure for subscribing to heartbeat notification	10
4.3.1 Void	10
4.3.2 Procedure for requesting immediate heartbeat notification	10
4.3.3 Void	11
4.4 Solutions.....	11
4.4.1 Stage 2 definition.....	11
4.4.2 Stage 3 definition.....	11
5 Discovery of Management Services.....	12
5.1 Overview	12
5.2 Specification level requirements	12
5.2.1 Use cases.....	12
5.2.1.1 Adding a new management service producer to MnS registry.....	12
5.2.1.2 Removing a management service producer from MnS registry	13
5.2.1.3 MnS Consumer retrieves management service information from MnS registry	13
5.2.1.4 Providing detailed capabilities about management service	13
5.2.1.5 MnS Consumer retrieves detailed capabilities about management service	14
5.2.2 Requirements	14
5.2.3 Solutions	14
5.2.3.0 Overview.....	14
5.2.3.0.1 Introduction	14
5.2.3.0.2 Registration of Management Services	14
5.2.3.0.3 Discovery of Management Services	15
5.2.3.1 Stage 2 definition	15
5.2.3.2 Stage 3 definition	15
5.3 Usage of MnS Registry for different deployment scenarios.....	16
5.4 MnS version publication	17
6 Managing management data.....	17
6.1 Producing and reporting management data	17
6.1.1 Description.....	17
6.1.2 Void	19
6.1.3 Requirements	19

6.1.4	Solutions	19
6.1.4.1	Stage 2 definition	19
6.1.4.2	Stage 3 definition	19
6.2	Coordinating management data production.....	20
6.2.1	Description.....	20
6.2.2	Void	20
6.2.3	Requirements	20
6.3	Storing management data	20
6.3.1	Description.....	20
6.3.2	Void	21
6.3.3	Requirements	21
6.4	Managing external management data	21
6.4.1	Description.....	21
6.4.2	Void	22
6.4.3	Requirements	22
6.4.4	Solutions	22
6.4.4.1	Stage 2 definition	22
6.4.4.2	Stage 3 definition	22
6.5	Discovery of management data	23
6.5.1	Description.....	23
6.5.2	Void	23
6.5.3	Requirements	23
6.5.4	Solutions	24
6.5.4.1	Stage 2 definition	24
6.5.4.2	Stage 3 definition	24
7	File management	25
7.1	File transfer	25
7.1.1	Description.....	25
7.1.2	Void	25
7.1.3	Requirements	25
7.2	File retrieval from a MnS producer by a MnS consumer	25
7.2.1	Description.....	25
7.2.2	Void	25
7.2.3	Requirements	25
7.2.4	Solutions	26
7.2.4.1	Stage 2 definition	26
7.2.4.1	Stage 3 definition	26
7.3	File push from a MnS producer to a MnS consumer.....	26
7.3.1	Description.....	26
7.3.2	Void	26
7.3.3	Requirements	26
7.4	File download from a MnS consumer to a MnS producer.....	27
7.4.1	Description.....	27
7.4.2	Void	27
7.4.3	Requirements	27
7.4.4	Solutions	27
7.4.4.1	Stage 2 definition	27
7.4.4.2	Stage 3 definition	27
Annex A (informative): Heartbeat PlantUML source code.....		28
A.0	Procedure for subscribing to heartbeat notification.....	28
A.1	Void.....	28
A.2	Procedure for requesting immediate heartbeat notification.....	28
A.3	Void.....	28
Annex B (informative): Change history		29
History		30

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, certain modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" shall not to be used as substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document specifies use cases, requirements and procedures for management capabilities of 5G networks.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 28.532: "Management and orchestration; Generic management services".
- [3] 3GPP TS 28.533: " Management and orchestration; Architecture framework".
- [4] 3GPP TS 28.552: "Management and orchestration; 5G performance measurements".
- [5] 3GPP TS 28.554: "Management and orchestration; 5G end to end Key Performance Indicators (KPI)".
- [6] 3GPP TS 32.422: "Telecommunication management; Subscriber and equipment trace; Trace control and configuration management".
- [7] 3GPP TS 32.404: "Telecommunication management; Performance Management (PM); Performance measurements; Definitions and template".
- [8] 3GPP TS 32.423: "Telecommunication management; Subscriber and equipment trace: Trace data definition and management".
- [9] 3GPP TS 28.622: "Telecommunication management; Generic Network Resource Model (NRM) Integration Reference Point (IRP); Information Service (IS) "
- [10] 3GPP TS 28.623: "Telecommunication management; Generic Network Resource Model (NRM) Integration Reference Point (IRP); Solution Set (SS) definitions "

3 Definitions of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

Trace metrics: This term is defined in TS 32.422 [6].

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

MnS Management Service

4 Heartbeat

4.1 Overview

The communication between Management Service (MnS) producers and MnS consumers shall be monitored, and communication link breaks between them shall be discovered by MnS consumers as early as possible. The behaviour of the MnS consumers, after detection of communication failure, is outside the scope of the present document.

4.2 Specification level requirements

4.2.1 Use cases

4.2.1.1 Configuring heartbeat notification periodicity

Use case stage	Evolution/Specification	<<Uses>> Related use
Goal	To configure the periodicity at which the management service producer shall emit heartbeat notifications to its authorized management service consumer.	
Actors and Roles	An authorized consumer of the management service.	
Telecom resources	The management service producer.	
Assumptions	N/A	
Pre-conditions	The periodicity requested by the management service consumer has a valid value.	
Begins when	The management service consumer sends a request to the management service producer to set the periodicity at which it shall emit heartbeat notifications.	
Step 1	The management service producer receives the request and sets its internal countdown timer to a value (which can be zero) equal to the periodicity requested by the management service consumer.	
Step 2	The management service producer sends a heartbeat notification to all authorized management service consumer(s), provided they previously subscribed to heartbeat notifications.	
Ends when	All the steps identified above are successfully completed.	
Exceptions	One of the steps identified above fails.	
Post-conditions	The notification periodicity has been configured according to the management service consumer request. A heartbeat notification is sent out to all authorized management service consumer(s).	
Traceability	REQ-HB-CTRL-2.	

4.2.1.2 Requesting immediate heartbeat notification

Use case stage	Evolution/Specification	<<Uses>> Related use
Goal	To trigger the emission of an immediate heartbeat notification by the management service producer.	
Actors and Roles	An authorized consumer of the management service.	
Telecom resources	The management service producer.	
Assumptions	N/A	
Pre-conditions	N/A	
Begins when	The soliciting management service consumer sends a request to the management service producer to emit immediately a heartbeat notification.	
Step 1	The management service producer receives the request and sends immediately a heartbeat notification to all authorized management service consumer(s) who had previously subscribed to heartbeat notifications. The management service producer countdown timer is not impacted.	
Ends when	All the steps identified above are successfully completed.	
Exceptions	One of the steps identified above fails.	
Post-conditions	The immediate heartbeat notification has been emitted according to the soliciting management service consumer request.	
Traceability	REQ-HB-CTRL-3, REQ-HB-NOTIF-2.	

4.2.1.3 Emitting periodic heartbeat notifications

Use case stage	Evolution/Specification	<<Uses>> Related use
Goal	To send periodic heartbeat notifications at the periodicity requested by the management service consumer.	
Actors and Roles	An authorized producer of the management service.	
Telecom resources	The management service consumer.	
Assumptions	The heartbeat notification periodicity has been configured according to the management service consumer request.	Configuring heartbeat notification periodicity
Pre-conditions	N/A	
Begins when	The internal countdown timer managed by the management service producer has reached the value 0.	
Step 1	The management service producer sends a heartbeat notification to all authorized management service consumer(s), provided they previously subscribed to heartbeat notifications.	
Step 2	The management service producer resets its internal countdown timer to the value of the heartbeat notification periodicity.	Configuring heartbeat notification periodicity
Ends when	All the steps identified above are successfully completed.	
Exceptions	One of the steps identified above fails.	
Post-conditions	The periodic heartbeat notification has been emitted to all authorized management service consumer(s) at the requested periodicity.	
Traceability	REQ-HB-NOTIF-1.	

4.2.2 Requirements

4.2.2.1 Requirements for controlling heartbeat

REQ-HB-CTRL-1: The management service producer shall have the capability to allow its authorized consumer to read the heartbeat period.

REQ-HB-CTRL-2: The management service producer shall have the capability to allow its authorized consumer to set the heartbeat period.

REQ-HB-CTRL-3: The management service producer shall have the capability to allow its authorized consumer to request the emission of an immediate heartbeat notification.

4.2.2.2 Requirements for notifying heartbeat

REQ-HB-NOTIF-1: The management service producer shall have the capability to send periodic heartbeat notifications to its authorized consumer at the frequency specified by the management service consumer.

REQ-HB-NOTIF-2: The management service producer shall have the capability to send immediate heartbeat notifications to its authorized consumer, upon request from the management service consumer.

4.3 Procedures for heartbeat

4.3.0 Procedure for subscribing to heartbeat notification

Figure 4.3.0-1 illustrates the procedure for subscribing to heartbeat notifications using operations and notifications of the provisioning MnS (see clause 11.1.1 of [2]). The HeartBeatControl instance is name contained by NtfSubscriptionControl instance, which includes attribute “notificationRecipientAddress” represent the address of Notification Receiver. The Notification Receiver can be the same entity as MnS consumer or different entity. Whenever the HeratbeatPeriodValue is set or modified, the MnS producer reinitialize its internal countdown timer and starts sending notifyHeartbeat notification with the specified period.

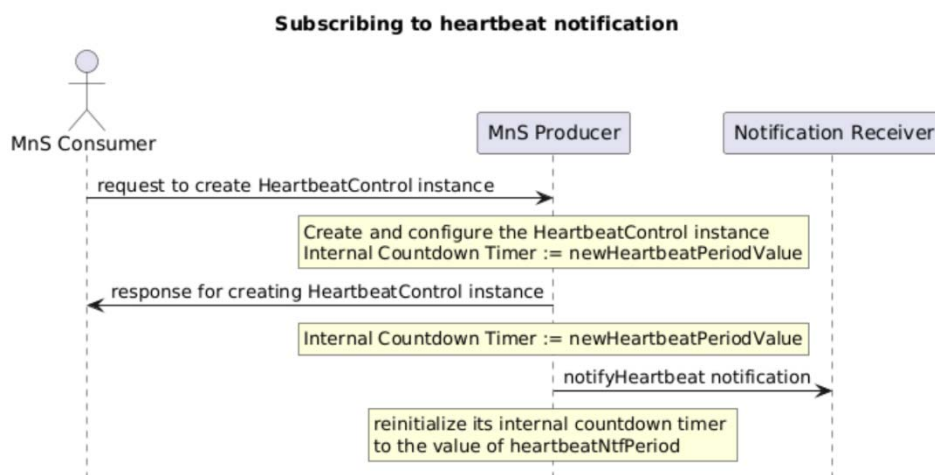


Figure 4.3.0-1: Procedure for subscribing to heartbeat notification

4.3.1 Void

4.3.2 Procedure for requesting immediate heartbeat notification

Figure 4.3.2-1 illustrates the procedure for requesting immediate heartbeat notification using operations and notifications of the provisioning MnS (see clause 11.1.1 of [2]).

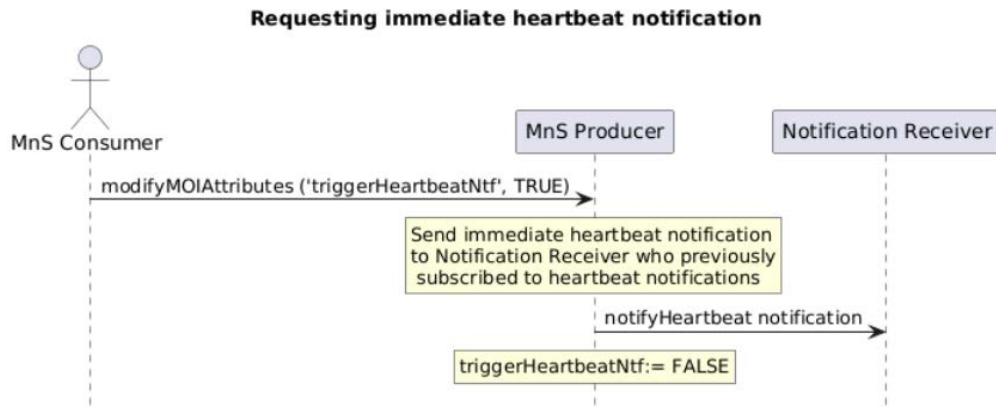


Figure 4.3.2-1: Procedure for requesting immediate heartbeat notification

4.3.3 Void

4.4 Solutions

4.4.1 Stage 2 definition

Following are the stage 2 definitions for controlling heartbeat:

- The operations and notifications of generic provisioning MnS defined in clause 11.1 in TS 28.532 [2].
- The Heartbeat notification control NRM fragment defined in clause 4.3.21 and clause 4.3.22 in TS 28.622 [9].

Following are the stage 2 definition for notifying heartbeat

- The Heartbeat notification defined in clause 11.4 in TS 28.532 [2].

4.4.2 Stage 3 definition

Following are the stage 3 definition for controlling heartbeat

- RESTful HTTP-based solution set
 - RESTful HTTP-based solution set for generic provisioning management service is defined in clause 12.1.1 in TS 28.532 [2]. Corresponding OpenAPI document "TS28532_ProvMnS.yaml" in clause A.1 in TS 28.532 [2].
 - OpenAPI document "TS28623_SubscriptionControlNrm.yaml" in clause 4.3 in TS 28.623 [10].
- YANG/Netconf-based solution set
 - YANG/Netconf-based solution set for generic provisioning management service is defined in clause 12.1.3 in TS 28.532 [2].
 - YANG model "_3gpp-common-subscription-control.yang" in clause 4.4. in TS 28.623 [10].

Following are the stage 3 definition for notifying heartbeat

- RESTful HTTP-based solution set for heartbeat notification is defined in clause 12.1.1 in TS 28.532 [2].
- OpenAPI document " TS28532_HeartbeatNtf.yaml " in clause A.5 in TS 28.532 [2].

5 Discovery of Management Services

5.1 Overview

To enable communication between MnS Consumers and MnS Producers, MnS Consumers need mechanisms to discover management service information available in the 3GPP management system, and their management capabilities. To this end, MnS Producers and their management capabilities need to be exposed in the 3GPP management system.

From management service perspective the following information can be exposed:

- Identifying data describing an MnS, e.g. name, version, type
- Capabilities of an MnS, e.g. supported operations, supported notifications

From MnS Consumer perspective such information can be used for different purposes, including:

- MnS Producer discovery: allows MnS Consumer to discover identifying information about an MnS Producer instance. In short, allows MnS Consumer to know which MnS Producers instances are exposed.
- MnS Producer Capabilities retrieval: allows MnS Consumer to retrieve capability information about an MnS Producer instance. In short, allows MnS Consumer to know what an MnS Producer instance is capable of.

In case an exposed MnS Producer instance's information changes the 3GPP management system needs to be updated.

MnS Consumers wishing to discover MnS Producer instances might have different questions. For example, an MnS Consumer may wish to know which MnS Producers manage a certain geographical area or civic location. Or, after receiving an alarm notification specifying that a specific NF is alarmed, they may wish to know the MnS Producers from which they can request management data from that NF or to retrieve the configuration of that NF.

5.2 Specification level requirements

5.2.1 Use cases

5.2.1.1 Adding a new management service producer to MnS registry

Use case stage	Evolution/Specification	<<Uses>> Related use
Goal	Add a MnS producer to a 3GPP management system.	
Actors and Roles	MnS Producer, MnS Registry	
Telecom resources	MnS producer. MnS discovery service producer.	
Assumptions	MnS producer is ready to be added to MnS registry.	
Pre-conditions	The MnS Producer is available.	
Begins when	There is a need for a MnS producer to be exposed via MnS registry.	
Step 1 (M)	The MnS producer is added to the MnS registry.	
Ends when	All the steps identified above are successfully completed.	
Exceptions	One of the mandatory steps fails.	
Post-conditions	MnS discovery service producer has stored the MnS information.	
Traceability	REQ-DMS-1	

5.2.1.2 Removing a management service producer from MnS registry

Use case stage	Evolution/Specification	<<Uses>> Related use
Goal	Remove a MnS producer from MnS registry..	
Actors and Roles	Network operator.	
Telecom resources	MnS producer.	
Assumptions	-	
Pre-conditions	The management service producer is no longer required in the MnS registry.	
Begins when	The management service is ready to be removed from MnS Registry.	
Step 1 (M)	The management service producer is removed from the MnS Registry.	
Ends when	All the steps identified above are successfully completed.	
Exceptions	One of the mandatory steps fails.	
Post-conditions	MnS discovery service producer has removed the MnS information related to the MnS Producer.	
Traceability	REQ-DMS-1	

5.2.1.3 MnS Consumer retrieves management service information from MnS registry

Use case stage	Evolution/Specification	<<Uses>> Related use
Goal	MnS consumer retrieves information from MnS registry.	
Actors and Roles	MnS Consumer	
Telecom resources	MnS registry	
Assumptions	MnS consumer is authorized to obtain the MnS information for the available management service(s) from MnS discovery service producer.	
Pre-conditions	MnS information exists in MnS registry.	
Begins when	MnS Consumer needs to access a specific MnS Producer(s).	
Step 1 (M)	MnS Consumer queries MnS Registry with filter criteria based on the management service(s) of interest.	
Step 2 (M)	MnS Consumer receives response with MnS Info for the management service(s) which match the criteria.	
Ends when	All the steps identified above are successfully completed.	
Exceptions	One of the mandatory steps fails.	
Post-conditions	MnS Consumer has basic information about the management service(s).	
Traceability	REQ-DMS-2, REQ-DMS-3, REQ-DMS-4, REQ-DMS-5	

NOTE: MnS information refer to the information used by the consumer to discover the producers of specific Management Services and to derive the addresses of the Management Service.

5.2.1.4 Providing detailed capabilities about management service

Use case stage	Evolution/Specification	<<Uses>> Related use
Goal	Management service detailed capabilities are exposed.	
Actors and Roles		
Telecom resources	-	
Assumptions	Management service detailed capabilities are available.	
Pre-conditions	Management service detailed capabilities are ready to be exposed.	
Begins when	MnS Producer wants to expose its detailed capabilities.	
Step 1 (M)	Management service detailed capabilities are exposed by MnS Producer.	
Post-conditions	Management services detailed capabilities have been exposed.	
Traceability		

5.2.1.5 MnS Consumer retrieves detailed capabilities about management service

Use case stage	Evolution/Specification	<<Uses>> Related use
Goal	MnS Consumer retrieves detailed capabilities for specific MnS Producer(s).	
Actors and Roles	MnS Consumer	
Telecom resources	-	
Assumptions	Management service has ability to expose its detailed capabilities.	
Pre-conditions	Authorized MnS Consumer knows location and method to retrieve detailed capabilities.	
Begins when	MnS Consumer requires to retrieve detailed capabilities of specific MnS Producer(s).	
Step 1 (M)	MnS Consumer reads detailed capabilities from MnS Producer of interest.	
Post-conditions	MnS Consumer has retrieved detailed capabilities of specific MnS Producer(s).	
Traceability		

5.2.2 Requirements

REQ-DMS-1: The 3GPP management system shall provide capabilities allowing MnS producers to register their management capabilities (including the endpoint address) at MnS discovery service producer for use by MnS consumers wishing to interact with these MnS producers.

REQ-DMS-2: The 3GPP management system shall provide capabilities allowing MnS consumers to retrieve the management capabilities registered at MnS discovery service producer by MnS producers.

REQ-DMS-3: The 3GPP management system shall provide capabilities allowing to discover MnS producers that are managing a specified managed entity.

REQ-DMS-4: The 3GPP management system shall provide capabilities allowing to discover the managed entities a MnS producer is responsible for.

REQ-DMS-5: The 3GPP management system shall provide capabilities allowing MnS consumers to retrieve the area information (geographical area or TAI) of the MnS instances.

REQ-DMS-6: The 3GPP management system shall provide capabilities allowing MnS producers to publish their MnS version in the MnS Registry.

5.2.3 Solutions

5.2.3.0 Overview

5.2.3.0.1 Introduction

The solution for Discovery of Management Services is based on the model driven approach. MnSRegistry NRM is configured by operators to control the behaviour of the management service discovery. Following are the functionalities for discovery of management services:

- Registration of Management Services
- Discovery of Management Services

5.2.3.0.2 Registration of Management Services

The Registration of Management Services functionalities allow a MnF to register MnS Information (i.e. MnSInfo) for a specific MnS instance that it produces to MnS Registry. When successful registration of an MnS instance, corresponding MnS information is stored in the MnS Registry and available for discovery by other authorized entities (as MnS consumer). Following are the list of concrete functionalities for Registration of Management Services:

- Register a new MnS instance

- Update a registered MnS instance
- Query a registered MnS instance
- Deregister a MnS instance

5.2.3.0.3 Discovery of Management Services

The Discovery of Management Services functionalities allow MnS consumer to retrieve MnS information on available MnS instances in the MnS Registry based on selection filter. MnSRegistry will verify the received MnS discovery request based on configured access control rules, and provide the MnS information of the available MnS instances based on selection filter. Following are the list of concrete functionalities for Discovery of Management Services:

- Query available MnS instances
- Subscribe/Unsubscribe changes on available MnS instances
- Notify changes on available MnS instances

5.2.3.1 Stage 2 definition

Following are the stage 2 definition for Discovery of Management Services:

- The operations and notifications of generic provisioning MnS defined in clause 11.1 in TS 28.532 [2].
- The MnSRegistry NRM fragment defined in clause 4.3.41 and clause 4.3.42 in TS 28.622 [9].

5.2.3.2 Stage 3 definition

Following are the stage 3 definition for Discovery of Management Services:

- RESTful HTTP-based solution set
 - RESTful HTTP-based solution set for generic provisioning management service is defined in clause 12.1.1 in TS 28.532 [2]. OpenAPI document "TS28532_ProvMnS.yaml" in clause A.1 in TS 28.532 [2].
 - OpenAPI document "TS28623_MnSRegistryNrm.yaml" in clause 4.3 in TS 28.623 [10].

Following are the detailed SS to support Registration and Discovery of Management Services based on Table 12.1.1.1.1-1 and Table 12.1.1.2.1-1 in TS 28.532 [2].

	Functionality	IS operations	HTTP Method	Resource URI
Registration of Management Services	Register a new MnS instance	createMOI operation	POST	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/MnsRegistry
	Update a registered MnS instance	modifyMOIAttributes operation	PUT/PATCH	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/MnsRegistry/MnsInfo={id}
	Query a registered MnS instance	getMOIAttributes operation	GET	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/MnsRegistry/MnsInfo={id}
	Deregister a MnS instance	deleteMOI operation	DELETE	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/MnsRegistry/MnsInfo={id}
Discovery of Management Services	Query available MnS instances	getMOIAttributes operation	GET	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/MnsRegistry
	Subscribe changes on available MnS instances	createMOI operation	POST	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}
	Unsubscribe changes on available MnS instances	deleteMOI operation	DELETE	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/NtfSubscriptionControl={id}
	Notify changes on available MnS instances	notifyMOIAttributeValue Changes notification	POST	{notificationTarget}

Note: The MnSRegistry and MnSInfo resources are defined in "TS28623_MnSRegistryNrm.yaml", the NtfSubscriptionControl resource is defined in "TS28623_SubscriptionControlNrm.yaml".

- YANG/Netconf-based solution set

- YANG/Netconf-based solution set for generic provisioning management service is defined in clause 12.1.3 in 3GPP TS 28.532 [2].

- YANG model "3gpp-common-mnsregistry.yang" in clause 4.4 TS 28.623 [10].

5.3 Usage of MnS Registry for different deployment scenarios

Following are potential deployment scenarios for MnS Registry (i.e. act as discover MnS producer):

- Deployment scenario #1: Separate MnSRegistry. The MnS Registry and a concrete MnS producer are separate entities with a published interface between them. In this scenario, the MnS Registry is used to store the MnS information (i.e. MnSInfo) for MnS instances and management capability information for management data (i.e. MgmtDataInfo) provided by different MnFs, especially for different MnFs from different vendors. Following is one example, MnF_1 needs to register MnSInfo_1 and MgmtDataInfo_1 in the MnS Registry implemented in MnF_3, and MnF_2 needs to discover/retrieve the MnSInfo_1 and MgmtDataInfo_1 from MnF_3 to consume MnS_1 provided by MnF_1. In this scenario, MnS Registry needs to support both registry and discovery/retrieve capabilities.

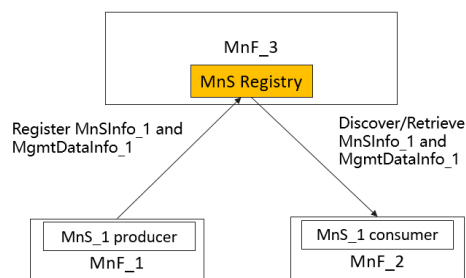


Figure 5.3-1 Example of Separate MnSRegistry deployment scenario

- Deployment scenario #2: Embedded MnSRegistry. The MnSRegistry and a concrete MnS producer are hosted by the same entity with an implementation specific interface between them. The MnS Registry is implemented in an MnF and used to store the MnS Information (i.e. MnSInfo) for MnS instances and management capability information for

management data (i.e. MgmtDataInfo) provided by the MnF itself. Following is one example, MnF_3 needs to retrieve/discover MnSInfo_1 and MgmtDataInfo_1 in the MnSRegistry implemented in MnF_1. In this scenario, MnS Registry supports discovery/retrieve capabilities only.

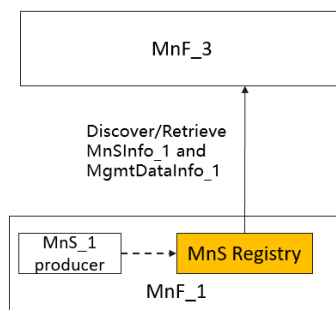


Figure 5.3-2 Example of Embedded MnSRegistry deployment scenario

5.4 MnS version publication

The MnS version is published in the MnS Registry NRM fragment [32] in support of MnS Discovery as defined in this specification.

6 Managing management data

6.1 Producing and reporting management data

6.1.1 Description

Management data is referring to data produced by radio access network functions, core network functions or management functions and used for management purposes. Management data specified by 3GPP for 5G management is classified into 5G performance measurements as defined by TS 28.552 [4], 5G end to end key performance indicators as defined by TS 28.554 [5] and Trace metrics as defined by TS 32.422 [6]. The combined performance measurements and key performance indicators are also called performance metrics.

Management data is produced on request. Therefore, the 3GPP management system needs to enable a data consumer to request management data to be produced. The data requester needs to specify the type of data to be produced as well as the radio access network functions, core network functions and management functions where the data shall be produced. The target managed object instances can be identified in multiple ways:

- The requester can specify the target managed object instances based on the managed object tree (as defined in the 3GPP Network Resource Models) representing the network and management functions. The simplest approach is to directly identify the managed object instances where data shall be produced. More sophisticated approaches allow to specify one or more subtrees where data shall be produced and may allow also to specify managed object classes to select only object instances of specific classes.
- The requester can specify one or multiple of the following selection criteria. The system needs to translate this information into the target managed object instances. The selection criteria need to be deterministic in such a way that the target node(s) can be selected unambiguously.
- Area of interest: In a big network, it makes sense to specify a limited area for which data shall be produced. The area of interest can be expressed for example with a geographical area, one or several cells or one or several tracking areas. The target managed object instances represent network functions serving that area of interest. Geographical areas can be expressed for example with multiple longitude-latitude pairs that define a convex polygon. In the radio domain the geographical area needs to be mapped to the coverage area of cells supported by RAN NE(s). The managed object instances (e.g. NRCellCU, GNBDFunction) providing service to these

cells can be identified as target managed object instances. Of course, the coverage area of the target cell(s) will usually not exactly map to the described shape of the geographical area because, on the one side, the coverage area of cell has no sharp borders due to fast fading effects, on the other side, the coverage area of cells may vary slightly e.g. due to adaptation of the antenna downtilt angle or beamforming configurations. For the mapping between the geographical area and the corresponding managed object instances the cell coverage status at the time of the request shall be used. Later changes affecting the cell coverage shall not be reflected for the mapping.

- Domain e.g RAN, CN: A consumer might only be interested in analysing and understanding the performance of a particular domain like RAN or Core e.g in case of recurrent issues, a consumer may want to have understanding of a particular domain only for further actions. In such a scenario, it should be possible to indicate the domain from where consumer wants measurements for its usage.
- Traffic type e.g user plane or control plane: 5G brings clear separation (CUPS) of user plane and control plane in a network, a consumer may leverage it to identify target managed object instances to have measurements from. For example, the measurement report may be expected from user plane nodes only.
- Slice type e.g eMBB, URLLC: Consumer may mention a particular slice type (eMBB, URLLC, mMTC, V2X, HMTTC) as the selection criteria. It may help in narrowing down the target managed object instances, which are part of provided slice type(s).

This MnS to request management data in a simple way shall not be exposed at any network function.

The management data can be requested according to a certain time scheduler. The consumer can e.g. specify a start and stop time or can request for data at specific days of a week or specific hours of a day.

The management data can be requested according to certain conditions, in this case, the management data shall be produced if corresponding conditions are satisfied. The consumer may specify different management data producing control parameters (e.g. producing period) in different management data requests, and each request related to a certain condition. For example, the condition may indicate a performance abnormal scenario when a performance metric crosses a specified threshold. Normally, if the condition is not satisfied, the management data may be produced in a higher period. However, in a performance abnormal scenario, the MnS producer may provide the management data more frequently to enable network optimization, such that it may report the management data produced before the anomaly with a lower period.

After production the data needs to be reported to the data consumers. Reporting can be based on multiple reporting methods such as file or streaming. Data reporting needs to be requested by the data consumer. The requestor needs to specify the control parameters for reporting such as the reporting method and the address the data shall be delivered to.

A data consumer which is unaware of specific managed objects (e.g. NRCellCU, NRCellDU), is able to obtain the management data without relying on the specific managed objects using area based KPIs (e.g. downlink weak coverage ratio or high DL PRB load ratio for the associated area). An area based KPI is a type of the management data which is not associated to specific managed objects. In this case, data requestor specifies the list of names or categories of the area based KPIs for the interested areas. Based on the request, data producer needs to report the area based KPIs to the data consumer. The area based KPIs can be associated with sub-areas of the interested areas.

Depending on access rights and security settings, data consumers may be subject to restrictions regarding the data they can access.

Data is always produced in some context. The data describing this context is called context data. Context data contains information on all interrelated conditions in which the management data is produced. This includes for example the configuration of the measured network functions, information on the network entity where the network function is running such as vendor name or software version, but also alarms associated to the network function or load conditions.

Data consumers processing management data in an effort to accomplish some task typically benefit when taking context data into account. For that reason, data consumers should be able to obtain the context data for the management data they obtain. However, access to certain management data does not automatically imply access to all context data. Access to management data and access to context data may be subject to different data security and data protection considerations.

6.1.2 Void

6.1.3 Requirements

REQ-MDM-PR-1: The 3GPP management system shall enable an authorized data consumer to request management data (specified by 3GPP) to be produced.

REQ-MDM-PR-2: The 3GPP management system shall enable an authorized data consumer to request management data specified by 3GPP to be produced by certain managed object instance(s) only. The selection criteria to determine the managed object instance(s) shall be deterministic in such a way that the target node(s) can be selected unambiguously. The managed object instances can be targeted based on:

- Area of interest (e.g. list of cells, list of tracking areas or geographical area).
- Domain (CN or RAN).
- User plane or control plane.
- Slice type (e.g. eMBB, URLLC, mMTC, V2X, HMTTC).

The MnS to request management data specified by 3GPP in a simple way shall not be exposed at any network function.

The mapping of geographical area to corresponding managed object instances reflects the cell coverage status at the time of the request.

REQ-MDM-PR-3: The 3GPP management system shall enable an authorized data consumer to request management data specified by 3GPP to be produced according to a certain time scheduler.

REQ-MDM-PR-4: The 3GPP management system shall enable an authorized data consumer to request management data (specified by 3GPP) to be reported to the requesting or another authorized data consumer.

REQ-MDM-PR-5: The 3GPP management system shall enable an authorized data consumer to obtain context data for management data. Access to management data does not imply access to context data. Different data privacy considerations may apply.

REQ-MDM-PR-6: The 3GPP management system shall support enabling an authorized data consumer to obtain management data which does not rely on specific managed objects.

REQ-MDM-PR-7: The 3GPP management system shall enable an authorized data consumer to request management data (specified by 3GPP) to be produced according to corresponding conditions.

NOTE: The term "management data specified by 3GPP" relates to

- 5G performance measurements as defined by TS 28.552 [4]
- 5G end to end key performance indicators as defined by TS 28.554 [5], and
- Trace metrics as defined by TS 32.422 [6].

6.1.4 Solutions

6.1.4.1 Stage 2 definition

Following are the stage 2 definition for producing and reporting management data.

- The operations and notifications of generic provisioning MnS defined in clause 11.1 in TS 28.532 [2].
- The ManagementDataCollection control NRM fragment defined in clause 4.3.47 in TS 28.622 [9].

6.1.4.2 Stage 3 definition

Following are the stage 3 definition for producing and reporting management data.

- RESTful HTTP-based solution set

- RESTful HTTP-based solution set for generic provisioning management service is defined in clause 12.1.1 in 3GPP TS 28.532 [2]. OpenAPI document "TS28532_ProvMnS.yaml" in clause A.1 in TS 28.532 [2].
- OpenAPI document " TS28623_ManagementDataCollectionNrm.yaml " in clause 4.3 in TS 28.623 [10].

Following are the detailed SS to support management data collection based on Table 12.1.1.1.1-1 and Table 12.1.1.2.1-1 in TS 28.532 [2].

Table 6.1.4.2-1: SS to support management data collection

	Functionality	IS operations	HTTP Method	Resource URI
Management Data Collection	Management data collection request	createMOI operation	POST	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/ManagementDataCollection
	Management data collection deletion	deleteMOI operation	DELETE	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/ManagementDataCollection={id}
	Management data collection status query	getMOIAttributes operation	GET	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/ManagementDataCollection={id}

Note: The ManagementDataCollection resource is defined in " TS28623_ManagementDataCollectionNrm.yaml ".

- YANG/Netconf-based solution set

- YANG/Netconf-based solution set for generic provisioning management service is defined in clause 12.1.3 in 3GPP TS 28.532 [2].

- YANG model "_3gpp-common-managementdatacollection.yang " in clause 4.4 in TS 28.623 [10].

6.2 Coordinating management data production

6.2.1 Description

Many consumers can request network or management functions to produce management data. In this context it is beneficial to coordinate data requests at the management level to optimize management data production.

6.2.2 Void

6.2.3 Requirements

REQ-MDM-C-1: The 3GPP management system shall coordinate requests from several data consumers to avoid producing multiple times the same data at a certain point of time.

NOTE: The definition of "same data" is not addressed in the current document.

6.3 Storing management data

6.3.1 Description

Storing management data enables reuse of management data for multiple management purposes.

For example, AI/ML models need input data collected over a certain period of time for training purposes. A specific set of collected data may serve different purposes and can therefore be input to multiple AI/ML services. For example, management data collected in a geographical area may be used also for another geographical area when the scenarios in the areas are statistically similar.

Another use case for storing produced data is related to the fact that multiple sets of training data from similar scenarios are typically required. For example, one set of data produced for the rush hour in a subway station on a single weekday is typically not enough for profiling. Many sets produced on many workdays are required.

Stored data is useful when management functions can discover which data has been produced and stored in the past to check if the currently needed data is already available.

6.3.2 Void

6.3.3 Requirements

REQ-MDM-S-1: The 3GPP management system shall support the storing of produced management data.

REQ-MDM-S-2: The 3GPP management system shall enable an authorized data consumer to discover stored management data.

REQ-MDM-S-3: The 3GPP management system shall enable an authorized data consumer to retrieve stored management data.

6.4 Managing external management data

6.4.1 Description

Management data which is specified by 3GPP (clause 6.1.1) can be enriched by additional data not specified by 3GPP. This so-called external management data can be produced by data sources of different nature (e.g. sensors) with different formats.

Note that management data that is not defined by 3GPP but specified based on 3GPP defined management data definition templates and frameworks (such as the measurement definition template in TS 32.404 [7]) is not considered as external management data.

External management data can be used for example as additional input for network optimization and prediction.

The management system should be able to manage this kind of data. That means data consumers should be able to request external management data to be produced and reported. The management system should provide support for storing it.

The definition of external data sources and the data formats they use is out of scope of this specification. This functionality is supported based on the assumption that the connection between the 3GPP external entities and 3GPP management system is set up enabling the 3GPP management system to obtain and store the external management data. The mechanism for setting up the connection between the 3GPP management system and external data sources and collection of the external management data is out of scope of this specification. This functionality focuses on the external management data discovery, request and delivery between MnS producer and MnS consumer. Following is an example to illustrate the framework for managing external management data.

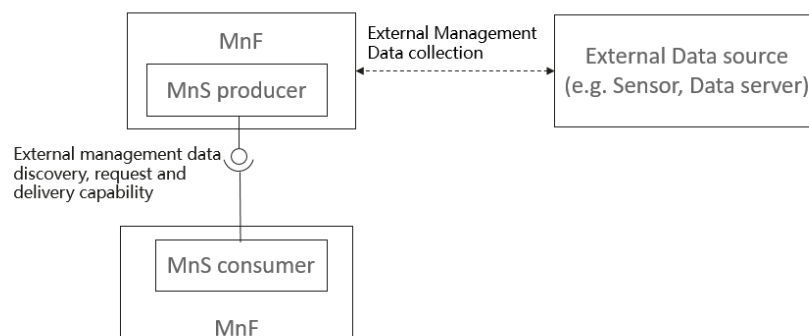


Figure 6.4.1-1 Example to illustrate the framework for managing external management data.

The present document defines generic management mechanisms for external management data discovery, request and delivery, which can cope with any kind of external data sources and data formats.

6.4.2 Void

6.4.3 Requirements

REQ-MDM-ED-1: Void.

REQ-MDM-ED-2: The 3GPP management system shall enable an authorized data consumer to request external management data to be reported to the requesting or another authorized data consumer.

REQ-MDM-ED-3: The 3GPP management system shall support the storing of produced external management data.

REQ-MDM-ED-4: The 3GPP management system shall enable an authorized data consumer to discover stored external management data.

REQ-MDM-ED-5: The 3GPP management system shall enable an authorized data consumer to retrieve stored external management data.

NOTE: The term "external management data" relates to data not specified by 3GPP.

6.4.4 Solutions

6.4.4.1 Stage 2 definition

Following are the stage 2 definition for management of external management data:

- The operations and notifications of generic provisioning MnS defined in clause 11.1 in TS 28.532 [2].
- The External data type NRM fragment (including ExternalDataType IOC) defined in clause 4.3.73 in TS 28.622 [9].

6.4.4.2 Stage 3 definition

Following are the stage 3 definition for managing external management data:

- RESTful HTTP-based solution set
 - RESTful HTTP-based solution set for generic provisioning management service is defined in clause 12.1.1 in TS 28.532 [2]. OpenAPI document "TS28532_ProvMnS.yaml" in clause A.1 in TS 28.532 [2].
 - OpenAPI document "TS28623_ExternalDataMgmtNrm.yaml" in clause 4.3 in TS 28.623 [10].

Following are the detailed SS to support managing external management data based on Table 12.1.1.1.1-1 and Table 12.1.1.2.1-1 in TS 28.532 [2].

Table 6.4.4.2-1 SS to support managing external management data

	Functionality	IS operations	HTTP Method	Resource URI
Discovery of external management data types	Query available external management data types	getMOIAttributes operation	GET	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/SubNetwork={id}
	Subscribe changes on available external management data types	createMOI operation	POST	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/SubNetwork={id}
	Unsubscribe changes on available external management data types	deleteMOI operation	DELETE	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/SubNetwork={id}/NtfSubscriptionControl={id}
	Notify changes on available external management data types	notifyMOIAttributeValueChanges notification	POST	{notificationTarget}
Request and retrieve external management data	Request external management data	getMOIAttributes operation	GET	MnSRoot}/ProvMnS/{MnSVersion}/SubNetwork={id}/{ExternalDataType}=id

Note: The ExternalDataType resource is defined in "TS28623_ExternalDataMgmtNrm.yaml", the NtfSubscriptionControl resource is defined in "TS28623_SubscriptionControlNrm.yaml".

6.5 Discovery of management data

6.5.1 Description

Discovery of management data mechanism allows MnS consumers to discover what management data can be produced by the 3GPP management system without direct involvement of those MnS services producing the data, which can be time and resource consuming process.

For this mechanism to work MnS producers as entities producing data, need to register what data they can produce by adding a corresponding record in the 3GPP management system. The MnS consumer needs to discover or retrieve what management data (represented by management data name) or what type of management data (represented by management data category) can be produced by MnS producer. In addition, the MnS consumer needs to know what reporting methods are supported for the specified management data.

NOTE: The term "management data produced by 3GPP management system" relates to

- 5G performance measurements as defined by TS 28.552 [4]
- 5G end to end key performance indicators as defined by TS 28.554 [5], and
- Trace metrics as defined by TS 32.422 [6].

6.5.2 Void

6.5.3 Requirements

REQ-MDM-DIS-1: The 3GPP management system shall enable an authorized data consumer to discover what management data can be produced by 3GPP management system.

REQ-MDM-DIS-2: The 3GPP management system shall enable an authorized data consumer to discover what category of management data can be produced by 3GPP management system.

REQ-MDM-DIS-3: The 3GPP management system shall enable an authorized data consumer to obtain the reporting methods that are supported for the management data which can be produced by 3GPP management system.

6.5.4 Solutions

6.5.4.1 Stage 2 definition

Following are the stage 2 definition for discovery of management data:

- The operations and notifications of generic provisioning MnS defined in clause 11.1 in TS 28.532 [2].
- The NRM fragments related to management data discovery (including MnsRegistry IOC, MgmtDataInfo IOC and MnsInfo) defined in clause 4.3.41, clause 4.3.42, and clause 4.3.75 in TS 28.622 [9].

6.5.4.2 Stage 3 definition

Following are the stage 3 definition for discovery of management data:

- RESTful HTTP-based solution set
- RESTful HTTP-based solution set for generic provisioning management service is defined in clause 12.1.1 in TS 28.532 [2]. OpenAPI document "TS28532_ProvMnS.yaml" in clause A.1 in TS 28.532 [2].
- OpenAPI document "TS28623_MnSRegistryNrm.yaml" in clause 4.3 in TS 28.623 [10].

Following are the detailed SS to support discovery of management data based on Table 12.1.1.1.1-1 and Table 12.1.1.1.2.1-1 in TS 28.532 [2].

Table 6.1.4.2-2: SS to support management data collection

	Functionality	IS operations	HTTP Method	Resource URI
Management Data Registration	Register the management capability information for a set of management data	createMOI operation	POST	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/MnsRegistry
	Update the management capability information for a set of management data	modifyMOIAttributes operation	PUT PATCH	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/MnsRegistry/MgmtDataInfo={id}
	Query a registered management capability information for a set of management data	getMOIAttributes operation	GET	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/MnsRegistry/MgmtDataInfo={id}
	Deregister the management capability information for a set of management data	deleteMOI operation	DELETE	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/MnsRegistry/MgmtDataInfo={id}
Management Data Discovery	Query available management capabilities for a set of management data	getMOIAttributes operation	GET	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/MnsRegistry
	Subscribe changes on available management capabilities for a set of management data	createMOI operation	POST	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}
	Unsubscribe changes on available management capabilities for a set of management data	deleteMOI operation	DELETE	{MnSRoot}/ProvMnS/{MnSVersion}/{URI-LDN-first-part}/NtfSubscriptionControl={id}
	Notify changes changes on available management capabilities for a set of management data	notifyMOIAttributeValueChanges notification	POST	{notificationTarget}

Note: The MnSRegistry and MgmtDataInfo resources are defined in "TS28623_MnSRegistryNrm.yaml", the NtfSubscriptionControl resource is defined in "TS28623_SubscriptionControlNrm.yaml".

7 File management

7.1 File transfer

7.1.1 Description

File management deals with transferring files between MnS producers and MnS consumers.

Existing file transfer protocols are used. These protocols need to comply to requirements specified in this clause.

7.1.2 Void

7.1.3 Requirements

REQ-FM-G-1: The file transfer protocol shall preserve the formatting of the file during exchange.

REQ-FM-G-2: The file transfer protocol shall preserve the encoding of the file during exchange.

REQ-FM-G-3: The MnS producer shall support at least one of the following file transfer protocols: SFTP, FTPES, HTTPS.

REQ-FM-G-4: The MnS consumer shall use the file transfer protocol supported by the MnS producer.

7.2 File retrieval from a MnS producer by a MnS consumer

7.2.1 Description

File retrieval is when the MnS consumer retrieves (gets) a file from the MnS producer. Either the MnS consumer retrieves a file from the MnS producer because the MnS consumer receives a file ready notification from the MnS producer or the MnS consumer reads the list of available (ready) files on the MnS producer and decides to retrieve an available file.

7.2.2 Void

7.2.3 Requirements

REQ-FM-R-1: The MnS producer shall support the capability allowing a MnS consumer to retrieve (get) a file from the MnS producer.

REQ-FM-R-2: The MnS producer shall support the capability allowing a MnS consumer to retrieve the list of files available for transfer from the MnS producer.

REQ-FM-R-3: The MnS producer shall support the capability to inform a MnS consumer about files that are available for retrieval.

REQ-FM-R-4: The MnS producer shall support the capability to inform a MnS consumer about errors that occurred during the preparation of a file.

REQ-FM-R-5: The information transferred to a MnS consumer about an available file shall allow associating the file to the process on the MnS producer that generated the file, if any such process exists and has an identifier.

REQ-FM-R-6: The MnS producer shall support the capability allowing a MnS consumer to indicate to the MnS producer, that the MnS consumer does not need a file anymore, such that the MnS producer hides the file in responses to subsequent read requests or decide to delete it altogether.

7.2.4 Solutions

7.2.4.1 Stage 2 definition

Following are the stage 2 definition for File retrieval from a MnS producer by a MnS consumer.

- The operations and notifications of generic provisioning MnS defined in clause 11.1 in 3GPP TS 28.532 [2].
- The File retrieval NRM fragment defined in TS 28.622 [9].

7.2.4.1 Stage 3 definition

Following are the stage 3 definition for File retrieval from a MnS producer by a MnS consumer.

- RESTful HTTP-based solution set
 - RESTful HTTP-based solution set for generic provisioning management service is defined in clause 12.1.1 in 3GPP TS 28.532 [2]. Corresponding OpenAPI document "TS28532_ProvMnS.yaml" in clause A.1 in TS 28.532 [2].
 - OpenAPI document " TS28623_FileManagementNrm.yaml " in clause 4.3 in TS 28.623 [10].
- YANG/Netconf-based solution set
 - YANG/Netconf-based solution set for generic provisioning management service is defined in clause 12.1.3 in 3GPP TS 28.532 [2].
 - YANG model "_3gpp-common-files.yang " in clause 4.4 TS 28.623 [10].

7.3 File push from a MnS producer to a MnS consumer

7.3.1 Description

For file push, the MnS producer pushes a file to the MnS consumer or a designated file server. The MnS consumer configures the MnS Producer to push a file based on an event occurring on the MnS producer, such as the availability of a file.

7.3.2 Void

7.3.3 Requirements

REQ-FM-P-1: void

REQ-FM-P-2: void

REQ-FM-P-3: void

REQ-FM-P-4: The MnS producer shall support the capability to push a file to the MnS consumer or a designated file server when configured by a MnS consumer.

REQ-FM-P-5: The MnS producer shall support the capability for a MnS consumer to configure the MnS producer to push a file to the MnS consumer or a designated file server based on an event occurring on the MnS producer.

REQ-FM-P-6: The MnS producer shall support the capability to inform the MnS consumer, that has configured a file push, or any other MnS consumer about the completion of that file push.

7.4 File download from a MnS consumer to a MnS producer

7.4.1 Description

File download is when the MnS producer gets a file from the MnS consumer or a designated file server because the MnS consumer requests the MnS producer to download the file.

7.4.2 Void

7.4.3 Requirements

REQ-FM-D-1: The MnS producer shall support the capability to download a file from a MnS consumer or a designated file server when triggered by a MnS consumer.

REQ-FM-D-2: The MnS producer shall support the capability allowing a MnS consumer to trigger the MnS producer to download a file from the MnS consumer or a designated file server.

REQ-FM-D-3: The MnS producer shall support the capability to inform the MnS consumer that has triggered a file download, or any other consumer about the progress of that file download.

7.4.4 Solutions

7.4.4.1 Stage 2 definition

Following are the stage 2 definition for File download from a MnS consumer to a MnS producer.

- The operations and notifications of generic provisioning MnS defined in clause 11.1 in 3GPP TS 28.532 [2].
- The File download NRM fragment defined in clause 4.3.46 in TS 28.622 [9].

7.4.4.2 Stage 3 definition

Following are the stage 3 definition for File download from a MnS consumer to a MnS producer.

- RESTful HTTP-based solution set
 - RESTful HTTP-based solution set for generic provisioning management service is defined in clause 12.1.1 in 3GPP TS 28.532 [2]. Corresponding OpenAPI document "TS28532_ProvMnS.yaml" in clause A.1 in TS 28.532 [2].
 - OpenAPI document " TS28623_FileManagementNrm.yaml " in clause 4.3 in TS 28.623 [10].
- YANG/Netconf-based solution set
 - YANG/Netconf-based solution set for generic provisioning management service is defined in clause 12.1.3 in 3GPP TS 28.532 [2].
 - YANG model "_3gpp-common-filemanagement.yang" in clause 4.4 in TS 28.623 [10].

Annex A (informative): Heartbeat PlantUML source code

A.0 Procedure for subscribing to heartbeat notification

The following PlantUML source code is used to describe the procedure for subscribing to heartbeat notifications, as depicted by Figure 4.3.0-1:

```
@startuml
title "Subscribing to heartbeat notification"
actor "MnS Consumer" as CONS
participant "MnS Producer" as PROV
participant "Notification Receiver" as Receiver
CONS -> PROV: request to create HeartbeatControl instance
rnote over PROV
  Create and configure the HeartbeatControl instance
  Internal Countdown Timer := newHeartbeatPeriodValue
endnote
PROV -> CONS: response for creating HeartbeatControl instance
rnote over PROV
  Internal Countdown Timer := newHeartbeatPeriodValue
endnote
PROV -> Receiver: notifyHeartbeat notification
rnote over PROV
  reinitialize its internal countdown timer
  to the value of heartbeatNtfPeriod
endnote
hide footbox
@enduml
```

A.1 Void

A.2 Procedure for requesting immediate heartbeat notification

The following PlantUML source code is used to describe the procedure for requesting immediate heartbeat notification, as depicted by Figure 4.3.2-1:

```
@startuml
title "Requesting immediate heartbeat notification"
actor "MnS Consumer" as CONS
participant "MnS Producer" as PROV
participant "Notification Receiver" as Receiver
CONS -> PROV: modifyMOIAttributes ('triggerHeartbeatNtf', TRUE)
rnote over PROV
  Send immediate heartbeat notification
  to Notification Receiver who previously
  subscribed to heartbeat notifications
endnote
PROV -> Receiver: notifyHeartbeat notification
rnote over PROV
  triggerHeartbeatNtf:= FALSE
endnote
hide footbox
@enduml
```

A.3 Void

Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-03	SA#87-e					Upgrade to changecontrol version	16.0.0
2021-03	SA#91e	SP-210152	0003	-	B	Add use cases for discovery of management services	17.0.0
2021-09	SA#93e	SP-210864	0004	1	C	Add support for discovery of management services	17.1.0
2021-09	SA#93e	SP-210876	0005	-	B	Add requirements for data management	17.1.0
2021-09	SA#93e	SP-210875	0006	-	B	Add requirements for file management	17.1.0
2021-12	SA#94e	SP-211467	0007	1	C	Clarifications into existing use cases	17.2.0
2021-12	SA#94e	SP-211467	0008	-	C	Clarifications into existing requirements	17.2.0
2022-06	SA#96	SP-220564	0009	1	F	Editorial Corrections	17.3.0
2022-06	SA#96	SP-220505	0010	-	B	Add requirements for management data collection and discovery	17.3.0
2023-12	SA#102	SP-231452	0013	1	F	Clarify management service discovery use cases	17.4.0
2024-04	-	-	-	-	-	Update to Rel-18 version (MCC)	18.0.0
2024-04	SA#104	SP-240804	0015	-	A	Rel-18 CR TS 28.537 Remove unsatisfied requirements related to file push triggered by MnS consumer	18.1.0
2024-04	SA#104	SP-240804	0020	-	A	Rel-18 CR TS 28.537 Remove undefined use case clause	18.1.0
2024-09	SA#105	SP-241162	0022	-	A	Rel-18 CR TS 28.537 Correction on file push requirement	18.2.0
2024-12	SA#106	SP-241640	0027	-	F	Rel-19 CR 28.537 Clarification of external management data	19.0.0
2024-12	SA#106	SP-241640	0028	-	D	Rel-19 CR 28.537 Correction of requirement labels	19.0.0
2024-12	SA#106	SP-241640	0029	-	F	Rel-19 CR 28.537 Introduce missing definition of term "trace metrics"	19.0.0
2025-03	SA#107	SP-250160	0030	2	B	Rel-19 TS 28.537 Usage of MnS Registry NRM fragment for MnS Registry and Discovery for different deployment scenarios	19.1.0
2025-03	SA#107	SP-250160	0032	1	B	Rel-19 CR TS 28.537 Change MnS provider to MnS producer	19.1.0
2025-03	SA#107	SP-250149	0033	1	F	Rel 19 CR TS 28.537 Remove editors notes	19.1.0
2025-03	SA#107	SP-250149	0034	1	D	Rel-19 CR TS 28.537 Add reference for solution description (NRM fragment) for each management capability	19.1.0
2025-06	SA#108	SP-250553	0031	3	B	Rel-19 CR TS 28537 Add requirements for discovering management capabilities of MnS instances based on area of interest	19.2.0
2025-06	SA#108	SP-250558	0035	2	F	Rel-19 CR TS 28.537 Correct procedures for heartbeat	19.2.0
2025-06	SA#108	SP-250538	0039		B	Rel-19 CR TS28.537	19.2.0
2025-06	SA#108					MCC: correction of a reference.	19.2.1
2025-09	SA#109	SP-251080	0040	1	B	Rel19 CR TS 28.537 Add missing solution description for discovery of management services	19.3.0
2025-09	SA#109	SP-251088	0042	-	F	Rel-19 CR TS 28.537 Update reference for trace metric	19.3.0
2025-09	SA#109	SP-251080	0043	1	B	Rel-19 CR 28.537 Add details for MnS component versioning	19.3.0
2025-12	SA#110	SP-251393	0041	3	F	Rel-19 CR TS 28.537 Add missing functionality and solution description for managing external management data	19.4.0
2025-12	SA#110	SP-251399	0048		A	Rel-19 CR 28.537 Remove requirement that does not have any solution.	19.4.0
2025-12	SA#110	SP-251393	0049	1	F	Rel-19 CR TS 28.537 Add missing RESTFUL implementation description for management data collection and discovery	19.4.0

History

Version	Date	Status
V19.4.0	February 2026	Publication