

ETSI TS 128 620 V16.1.0 (2024-10)



**Universal Mobile Telecommunications System (UMTS);
LTE;
Telecommunication management;
Fixed Mobile Convergence (FMC)
Federated Network Information Model (FNIM)
Umbrella Information Model (UIM)
(3GPP TS 28.620 version 16.1.0 Release 16)**



Reference

RTS/TSGS-0528620vg10

Keywords

LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
ETSI [Search & Browse Standards application](#).

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#).

Users should be aware that the present document may be revised or have its status changed,
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

| | |
|--|-----------|
| Intellectual Property Rights | 2 |
| Legal Notice | 2 |
| Modal verbs terminology..... | 2 |
| Foreword..... | 4 |
| 1 Scope | 5 |
| 2 References | 5 |
| 3 Definitions and abbreviations..... | 6 |
| 3.1 Definitions | 6 |
| 3.2 Abbreviations | 6 |
| 4 UIM – Partition operational | 6 |
| 4.1 Introduction | 6 |
| 4.2 Class diagram | 7 |
| 4.3 Class definitions | 8 |
| 4.3.1 <i>Domain_</i> | 8 |
| 4.3.1.1 Definition | 8 |
| 4.3.1.2 Attributes..... | 9 |
| 4.3.2 <i>ManagedElement_</i> | 9 |
| 4.3.2.1 Definition | 9 |
| 4.3.2.2 Attributes..... | 9 |
| 4.3.3 <i>Function_</i> | 10 |
| 4.3.3.1 Definition | 10 |
| 4.3.3.2 Attributes..... | 10 |
| 4.3.4 <i>ManagementSystem_</i> | 10 |
| 4.3.4.1 Definition | 10 |
| 4.3.4.2 Attributes..... | 10 |
| 4.3.5 <i>TopologicalLink_</i> | 10 |
| 4.3.5.1 Definition | 10 |
| 4.3.5.2 Attributes..... | 10 |
| 4.3.6 <i>TerminationPointEncapsulation_</i> | 11 |
| 4.3.6.1 Definition | 11 |
| 4.3.6.2 Attributes..... | 11 |
| 4.3.6.3 Attribute constraints | 11 |
| 4.3.7 <i>LayerTermination_</i> | 11 |
| 4.3.7.1 Definition | 11 |
| 4.3.7.2 Attributes..... | 12 |
| 4.3.7.3 Attribute constraints | 12 |
| 4.3.8 <i>Top_</i> | 12 |
| 4.3.8.1 Definition | 12 |
| 4.3.8.2 Attributes..... | 12 |
| 5 UIM – Partition inventory | 12 |
| 6 UIM – Class attribute definitions | 13 |
| 6.1 Attribute properties..... | 13 |
| Annex A (informative): Void | 17 |
| Annex B (informative): Void | 18 |
| Annex C (informative): Rationale and Usage of TPE/LT..... | 19 |
| Annex D (informative): Change history | 21 |
| History | 22 |

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

As a result of the analysis of the requirements for the harmonization of the 3GPP and TM Forum Information Models in the context of FMC basic use cases were developed [6], [14]. These use cases led to the recognition that it would be necessary to define common model elements applicable for wire-line and wireless networks. This document defines these common model elements.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] ATM Forum, Technical Committee, Network Management, M4 Network View CMIP MIB Specification, "CMIP Specification for the M4 Interface", Sep, 1995.
- [2] 3GPP TS 28,652: "Evolved Universal Terrestrial Radio Access (E-UTRAN) Network Resource Model (NRM) Integration Reference Point (IRP); Information Service (IS)".
- [3] Void.
- [4] Void.
- [5] 3GPP TS 32.622 "Generic network resources IRP: NRM".
- [6] 3GPP TR 32.833 "Study on Management of Converged Networks".
- [7] TM Forum GB922,"Information Framework (SID) Suite, Release 9.5"<http://www.tmforum.org/DocumentsInformation/GB922InformationFramework/45189/article.html>.
- [8] TM Forum MTOSI 2.1:(<http://www.tmforum.org/MTOSIRelease21/11998/home.html>).
- [9] Void.
- [10] Void.
- [11] TM Forum "SD1-18_layers.pdf" (part of [8]) (Especially "4.2.7 ATM and SDH capable STM-4").
- [12] Void.
- [13] Void.
- [14] TM Forum TR 166 "Information Model Federation Concepts and Principles" (<http://collab.tmforum.org/sf/go/doc13634?nav=1>).
- [15] Fixed Mobile Convergence (FMC) Federated Network Information Model (FNIM).
- [16] TM Forum MTOSI "SD1-25_objectNaming.pdf".
- [17] ITU-T X.200 (07/1994) "Information technology – Open Systems Interconnection – Basic Reference Model: The basic model".
- [18] 3GPP TS 21.905: "Vocabulary for 3GPP Specifications".

- [19] ITU-T G.805: "TRANSMISSION SYSTEMS AND MEDIA, DIGITAL SYSTEMS AND NETWORKS Digital networks – General aspects: Generic functional architecture of transport networks".
- [20] 3GPP TS 28.622 "Generic Network Resource Model (NRM) Integration Reference Point (IRP); Information Service (IS)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of this document, the following definitions, symbols and abbreviations apply. For definitions, symbols and abbreviations not found here.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [18] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [18].

| | |
|-------|---|
| CP | Connection Point |
| DM | Domain Manager |
| DN | Distinguished Name |
| EM | Element Manager |
| FNIM | Federated Network Information Model |
| FMC | Fixed Mobile Convergence |
| IOC | Information Object Class |
| LR | Layer Rate |
| LT | Layer Termination |
| ME | Managed Element |
| MTNM | Multi Technology Network Management (TM Forum) |
| MTOSI | Multi Technology Operations System Interface (TM Forum) |
| NRM | Network Resource Model (3GPP) |
| SDO | Standards Development Organization |
| SID | Shared Information & Data Model (TM Forum) |
| SLF | Subscription Location Function (3GPP) |
| TPE | Termination Point Encapsulation |
| UIM | Umbrella Information Model |
| VCAT | Virtual Concatenation |

4 UIM – Partition operational

4.1 Introduction

This section introduces a number of classes that form the UIM. These classes are represented in UML and are implementation neutral views in that they only capture the semantics of the model from both a purpose neutral and purpose specific perspective. They do not:

- Include syntax or representation of the information in a system or on-the-wire between systems;
- Relate to the protocol used to create/delete/read/write/modify the NM information.

Various SDOs and organizations are expected to use the UIM classes for definition of Domain/Technology-specific model classes. This procedure will maximize the probability of the domain/technology specific concrete classes (from various SDOs) being semantically consistent, a necessary characteristic for FMC NM purposes.

The Generic NRM IRP [20] defines abstract classes and other NRM IRPs such as E-UTRAN NRM IRP [2] define concrete classes. The Generic NRM IRP abstract classes are harmonized (if not identical) to those defined in this document.

The UIM defined in this document provides the set of classes etc. that strengthen consistency of representation in the fixed and mobile environments. For management of an FNIM solution many other classes will be required in addition to those in the UIM.

The UIM cannot be used directly for implementation. Implementation classes must be derived from those in the UIM by Inheritance or some other appropriate mechanism.

Implementation classes derived from those in the UIM (e.g. for the fixed environment) must use different names from those used in the UIM.

Where an implementation class is essentially identical to that in UIM the name of the implementation class should be the same as that of the UIM minus the underscore, e.g. the UIM class "*Function_*" would become "Function".

4.2 Class diagram

The criteria for choosing these classes is their relevance to (e.g. can be used by) Domain/Technology-specific model classes (e.g. 3GPP network resource model [2], ATM network management model [1], TMF MTNM [8]).

Note that this set of classes is basic in that their definitions and usage are necessary for the harmonization of various Domain/Technology-specific model classes, forming the so-called FNIM.

These classes are *abstract*. Other classes are for further study.

- *Domain_* (similar to *SubNetwork* of 3GPP [20] and *MultiLayerSubNetwork* of SID/MTOSI [7])
- *Function_* (similar to *ManagedFunction* of 3GPP [20] and *LogicalResource* of SID/MTOSI [7])
- *LayerTermination_* (similar to a single layer in the *layerParameterList_T* structure of SID/MTOSI [7])
- *ManagedElement_* (similar to *ManagedElement* of 3GPP [20] and SID/MTOSI [7])
- *ManagementSystem_* (similar to *ManagementNode* of 3GPP [20] and *OperationsSystem* of SID/MTOSI [7])
- *TerminationPointEncapsulation_* (similar to *TerminationPoint* of SID/MTOSI [7])
- *Top_* (similar to *Top* [20] of 3GPP and *RootEntity* of SID/MTOSI [7])
- *TopologicalLink_* (similar to *Link* [20] of 3GPP and *TopologicalLink* of SID/MTOSI [7])

A domain is a partition of instances of managed entities.

4.3.1.2 Attributes

The Domain_ IOC includes attributes inherited from Top_ IOC (defined in clause 4.3.8) and the following attributes:

| Attribute Name | Support Qualifier | isReadable | isWritable | isInvariant | isNotifiable |
|------------------------|-------------------|------------|------------|-------------|--------------|
| dnPrefix | M | M | - | - | M |
| | | T | F | F | T |
| userLabel | M | M | M | - | M |
| | | T | T | F | T |
| userDefinedNetworkType | M | M | M | - | M |
| | | T | T | F | T |

4.3.2 ManagedElement_

4.3.2.1 Definition

This (and its contained *Function_(s)*) represents telecommunications resources (e.g. equipment) within the telecommunications network. This group performs Managed Element (ME) functions, e.g., provides support and/or service to the subscriber.

This can also provide access to a grouping of equipments for management purposes.

An ME communicates with a manager (directly or indirectly) for the purpose of being monitored and/or controlled. MEs may or may not additionally perform element management functionality.

An ME (and its contained *Function_(s)*) may or may not be geographically distributed. An ME (and its contained *Function_(s)*) is often referred to as a "Network Element".

4.3.2.2 Attributes

The ManagedElement_ IOC includes attributes inherited from Top_ IOC (defined in clause 4.3.8) and the following attributes:

| Attribute Name | Support Qualifier | isReadable | isWritable | isInvariant | isNotifiable |
|----------------------------------|-------------------|------------|------------|-------------|--------------|
| dnPrefix | M | M | - | - | M |
| | | T | F | F | T |
| managedElementTypeList | O | M | - | - | M |
| | | T | F | F | T |
| userLabel | M | M | M | - | M |
| | | T | T | F | T |
| locationName | M | M | - | - | M |
| | | T | F | F | T |
| Attribute related to role | | | | | |
| managedBy | O | M | - | - | M |
| | | T | F | F | T |

4.3.3 *Function_*

4.3.3.1 Definition

This represents a process, task, transformation or a relation between inputs and outputs.

4.3.3.2 Attributes

The *Function_* IOC includes attributes inherited from *Top_* IOC (defined in clause 4.3.8) and the following attributes:

| Attribute Name | Support Qualifier | isReadable | isWritable | isInvariant | isNotifiable |
|----------------|-------------------|------------|------------|-------------|--------------|
| userLabel | O | M | M | - | M |
| | | T | T | F | T |

4.3.4 *ManagementSystem_*

4.3.4.1 Definition

This represents a telecommunications management system (DM/EM) that contains functionality for managing a number of MEs. The management system communicates with the MEs directly or indirectly over one or more interfaces for the purpose of monitoring and/or controlling these MEs.

This class has similar characteristics as the *ManagedElement_*. The main difference between these two classes is that the *ManagementSystem_* has a special association to the MEs that it is responsible for managing.

4.3.4.2 Attributes

The *ManagementSystem_* IOC includes attributes inherited from *Top_* IOC (defined in clause 4.3.8) and the following attributes:

| Attribute Name | Support Qualifier | isReadable | isWritable | isInvariant | isNotifiable |
|----------------------------------|-------------------|------------|------------|-------------|--------------|
| userLabel | M | M | M | - | M |
| | | T | T | F | T |
| Attribute related to role | | | | | |
| managedElements | O | M | - | - | M |
| | | T | F | F | T |

4.3.5 *TopologicalLink_*

4.3.5.1 Definition

The *TopologicalLink_* represents a communication relationship between network entities and indicates that information is intended to flow between those network entities. The *TopologicalLink_* always represents a logical relationship.

4.3.5.2 Attributes

The *TopologicalLink_* IOC includes attributes inherited from *Top_* IOC (defined in clause 4.3.8) and the following attributes:

| Attribute Name | Support Qualifier | isReadable | isWritable | isInvariant | isNotifiable |
|----------------------------------|-------------------|------------|------------|-------------|--------------|
| userLabel | M | M | M | - | M |
| | | T | T | F | T |
| layerProtocolNameList | O | M | - | - | M |
| | | T | F | F | T |
| Attribute related to role | | | | | |
| aEnd | M | M | - | - | M |
| | | T | F | F | T |
| zEnd | M | M | - | - | M |
| | | T | F | F | T |

4.3.6 *TerminationPointEncapsulation_*

4.3.6.1 Definition

The *TerminationPointEncapsulation_* (TPE) represents one or more functions that terminate/originate a signal that adapt a signal for use, and that enable a signal to propagate. Hence a TPE can represent the end point of a signal flow (see Annex C (informative): Rationale and Usage of TPE/LT for information on structure).

The TPE can also represent the intermediate point of a signal flow. See Annex C (informative): Rationale and Usage of TPE/LT for information on TPE structure.

A TPE is capable of encapsulating multiple transport functions (G.805 termination functions, adapters, points etc.) at many different layers where the encapsulated transport functions are all related to the same signal flow. There are specific rules that guide encapsulation (see Annex C (informative): Rationale and Usage of TPE/LT for information on usage). The encapsulated layers may be exposed (of its details of the transport assembly) via usage of instances of *LayerTermination_* (LT).

The TPE deals equivalently with unidirectional and bidirectional flows.

4.3.6.2 Attributes

The *TerminationPointEncapsulation_* IOC includes attributes inherited from *Top_* IOC (defined in clause 4.3.8) and the following attributes:

| Attribute Name | Support Qualifier | isReadable | isWritable | isInvariant | isNotifiable |
|----------------|-------------------|------------|------------|-------------|--------------|
| tpeType | CM | M | - | - | M |
| | | T | F | F | T |

4.3.6.3 Attribute constraints

| Name | Definition |
|---------------------------|---|
| tpeType Support Qualifier | The condition is "The subject class instance name-contains one or more <i>LayerTermination_</i> instances". |

4.3.7 *LayerTermination_*

4.3.7.1 Definition

The *LayerTermination_* (LT) encapsulates the functions and points associated with one instance of a layer [0]. The functions include the adapter functions, the termination functions and the connection points of that layer. In this case the term layer is essentially synonymous with the term protocol as use by other standards. All functions encapsulated have the same signal granularity, closely associated characteristic type and essential rate. A specific *LayerTermination_* may be equipped with a subset of capabilities. Where the TPE is semi-transparent the layers encapsulated by a TPE are exposed by the *LayerTermination_* set that it contains.

The *LayerTermination_* provides the relevant layer parameters for the semi-transparent TPE cases.

The *LayerTermination_* allows for detailed layer description of a TPE (potentially representing a port) and for precise association of the TPE with a *TopologicalLink_* (or other representatives of forwarding relationship).

4.3.7.2 Attributes

The *LayerTermination_ IOC* includes attributes inherited from *Top_ IOC* (defined in clause 4.3.8) and the following attributes:

| Attribute Name | Support Qualifier | isReadable | isWritable | isInvariant | isNotifiable |
|-----------------------|-------------------|------------|------------|-------------|--------------|
| layerProtocolNameList | M | M | - | - | M |
| | | T | F | F | T |
| direction | M | M | - | - | M |
| | | T | F | F | T |
| ltType | M | M | - | - | M |
| | | T | F | F | T |
| index | CM | M | - | - | M |
| | | T | F | F | T |

4.3.7.3 Attribute constraints

| Name | Definition |
|-------------------------|--|
| index Support Qualifier | The condition is "More than one <i>LayerTermination_</i> instances (named-contained by the same <i>TerminationPointEncapsulation_</i> instance) are associated with the same signal flow." |

4.3.8 *Top_*

4.3.8.1 Definition

The *Top_* is a logical construct representing the origin of definitions for all classes defined for the converged network management purposes. All other classes specified in this document and in other FNIM specifications must inherit from *Top_* directly or indirectly.

4.3.8.2 Attributes

| Attribute Name | Support Qualifier | isReadable | isWritable | isInvariant | isNotifiable |
|----------------|-------------------|------------|------------|-------------|--------------|
| id | M | M | - | M | - |
| | | T | F | T | F |

5 UIM – Partition inventory

Void.

6 UIM – Class attribute definitions

6.1 Attribute properties

| Attribute Name | Documentation and Allowed Values | Properties |
|-----------------------|---|--|
| direction | Represents the flow of traffic within the LT. allowedValues: The allowed values are: <ul style="list-style-type: none"> ➤ Client-Server: Signal flows down the LT, e.g. traffic is taken from a number of low rate clients and multiplexed into a higher rate server. ➤ Server-Client: Signal flows up the LT. ➤ Bidirectional: Signal flow is both Client-Server and Server-Client. | type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False |
| dnPrefix | It carries the DN Prefix information or no information. See Annex C of 32.300 [2] for one usage of this attribute. allowedValues: N/A | type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False |
| id | An attribute whose class name and value can be used as an RDN when naming an instance of the object class. This RDN uniquely identifies the object instance within the scope of its containing (parent) object instance. allowedValues: format of allowed values to be conformant with TS 32.300 [3]. | type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False |
| index | Provides any relevant indexing of the LT (channel number, e.g. '3') allowedValues: N/A | type: Integer multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False |
| layerProtocolNameList | Name(s) and additional descriptive information such as version number for the protocol(s)/layer(s) used for the associated communication link. Syntax and semantic is not specified. allowedValues: allowed value examples: "X2AP", "LR Optical Channel" | type: String multiplicity: 1..* isOrdered: False isUnique: True defaultValue: None isNullable: True |
| locationName | The physical location (e.g. an address) of an entity represented by a (derivative of) <i>ManagedElement_</i> . It may contain no information to support the case where the derivative of <i>ManagedElement_</i> needs to represent a distributed multi-location NE. allowedValues: N/A | type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False |
| ltType | The name of the specification that describes the internal construction of the LT, indicating for example that it possesses a G.805 CP but no G.805 TCP (see [11]). allowedValues: N/A | type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False |

| Attribute Name | Documentation and Allowed Values | Properties |
|--------------------------------------|---|---|
| managedElementT ypeList | <p>It is a multi-valued attribute with one or more unique elements. Thus, it may represent one ME functionality or a combination of more than one functionality.</p> <p>The actual syntax and encoding of this attribute is Solution Set specific.</p> <p>allowedValues:</p> <ol style="list-style-type: none"> 1) The allowed values of this attribute are the names of the IOC(s) that are (a) derived/subclassed from <code>ManagedFunction</code> and (b) directly name-contained by <code>ManagedElement</code> IOC (on the first level below <code>ManagedElement</code>), but with the string "Function" excluded. 2) If a <code>ManagedElement</code> contains multiple instances of a <code>ManagedFunction</code> this attribute will not contain repeated values. 3) The capitalisation (usage of upper/lower case) of characters in this attribute is insignificant. Thus, the <code>NodeB</code> should be case insensitive when reading these values. 4) Two examples of allowed values are: <ul style="list-style-type: none"> • <code>NodeB</code>; • <code>HLR, VLR</code>. | <p>type: String multiplicity: 1..* isOrdered: False isUnique: True defaultValue: None isNullable: False</p> |
| tpeType | <p>The name of the specification that describes the construction of the TPE emphasising for example the access to the TPE and whether it is associated with a physical port directly or not (see [11]).</p> <p>allowedValues: N/A</p> | <p>type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False</p> |
| userDefinedNetw orkType | <p>Textual information indicating network type, e.g. "UTRAN". It may contain no information if there is no appropriate network type can be used.</p> <p>allowedValues: N/A</p> | <p>type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False</p> |
| userLabel | <p>A user-friendly (and user assignable) name of this object.</p> <p>allowedValues: N/A</p> | <p>type: String multiplicity: 1 isOrdered: N/A isUnique: N/A defaultValue: None isNullable: False</p> |
| Attribute related to role | | |
| aEnd | <p>The value of this attribute shall be a list of Distinguished Name of the alphabetically first instance in the <code>Link</code> subclass name to which this link/relation is associated (i.e., pointing to the instance of <X> as described in the definition of <code>Link</code> IOC in the present document). As an example, with <code>Link_As_Slf</code>, <code>aEnd</code> would contain the Distinguished Name of the <code>AsFunction</code> instance, and the <code>zEnd</code> would contain the Distinguished Name of <code>SlfFunction</code> instance.</p> <p>allowedValues:</p> <ol style="list-style-type: none"> 1) For the instance whose class is defined by 3GPP, the format of the allowed values would be in conformant with that defined in TS 32.300 [3]. 2) See Note1. | <p>type: DN multiplicity: * isOrdered: False isUnique: True defaultValue: None isNullable: False passedById: True</p> |

| Attribute Name | Documentation and Allowed Values | Properties |
|--|--|--|
| managedBy | This relates to the role played by <i>ManagementSystem_</i> in the relation between <i>ManagedSystem_</i> and <i>ManagedElement_</i> . This attribute contains a list of the DN(s) of the related subclasses of <i>ManagementSystem_</i> instance(s). allowedValues: N/A | type: DN multiplicity: * isOrdered: False isUnique: True defaultValue: None isNullable: False passedById: True |
| managedElements | This relates to the role played by <i>ManagedElement_</i> in the relation between <i>ManagedSystem_</i> and <i>ManagedElement_</i> . This attribute contains a list of the DN(s) of the related subclasses of <i>ManagedElement_</i> instance(s). allowedValues: N/A | type: DN multiplicity: * isOrdered: False isUnique: True defaultValue: None isNullable: False passedById: True |
| zEnd | The value of this attribute shall be a list of Distinguished Name of the alphabetically second instance in the <i>Link</i> subclass name to which this link/relation is associated (i.e., pointing to the instance of <Y> as described in the definition of <i>Link IOC</i> in the present document). As an example, with <i>Link_As_Slf</i> , <i>aEnd</i> would contain the Distinguished Name of the <i>AsFunction</i> instance, and the <i>zEnd</i> would contain the Distinguished Name of <i>SlfFunction</i> instance. allowedValues: 1) For the instance whose class is defined by 3GPP, the format of the allowed values would be in conformant with that defined in TS 32.300 [3]. 2) See Note1. | type: DN multiplicity: * isOrdered: False isUnique: True defaultValue: None isNullable: False passedById: True |
| Note 1: For the instance whose class is defined by TM Forum, the format of the allowed values would be in conformant with that defined in TM Forum MTOSI SD1-25_objectNaming [16]. | | |

Annex A (informative): Void

Annex B (informative): Void

Annex C (informative): Rationale and Usage of TPE/LT

This Annex provides the rationale and the usage of LT in conjunction with TPE.

Rational

A TPE is capable of encapsulating multiple transport functions (G.805 [19] termination functions, adapters, points etc.) at many different layers where the encapsulated transport functions are all related to the same signal flow. See Figure 10: UIM related to TM Forum model and ITU-T concepts.

The TPE is used to both reduce the instances of objects required to represent a given transport assembly and to also simplify the translation from traditional environments where layering is not fully represented.

The encapsulation may be opaque, i.e. not exposing the layering, or semi-transparent, exposing the explicit layering but compacted into a single TPE instance. In the former case, TPE instance does not need to name-contain any LT. In the latter case, TPE instance needs to name-contain instances of LT.

The TPE deals equivalently with unidirectional and bidirectional flows. A bidirectional flow is where pairings of unidirectional flows have some shared fate or are considered as related in some way such that all entities associated with the whole bidirectional flow will be encapsulated in one TPE. Where a bidirectional flow is encapsulated it is possible to connect to only one of the two directions of flow and this can be represented through parameters of the TPE.


Usage

The TPE provides a place against which to raise alarms, display parameters and set attributes associated with the signal flow.

The TPE can be related:

- Directly to one or more physical ports (i.e. that the signal is associated directly with an externally visible connector)
 - Note that a physical port could also be related to more than one TPE;
- To logical functions that anchor the signal flow (i.e. it is floating between flexible functions in the equipment with no externally visible connector);
- To another supporting TPE to represent a client signal of the supporting TPE where there may be many instances of client;
 - Note that there may be many instances of server TPE that feed a single client (e.g., in the case of VCAT)

For background see SD1-18 Functional Modelling Concepts [11] and naming refer to SD1-25 Object Naming [16].

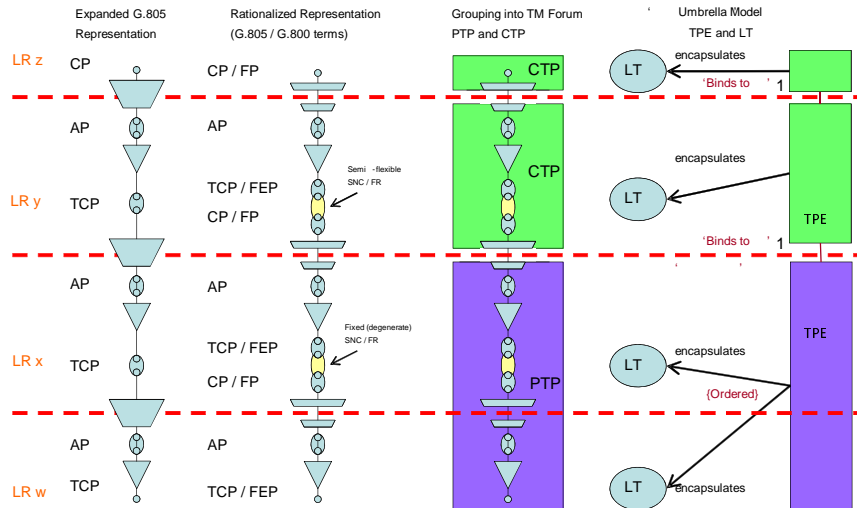

Key

AP = Access Point
 CP = Connection Point
 CTP = Connection Termination Point ((several different usages)
 FEP = Forwarding End Point
 FIP = Forwarding Intermediate Point
 FR = Forwarding Relationship
 LR = Layer Rate (approximately equivalent to protocol)
 LT = Layer Termination

PTP = Physical Termination Point
 SNC = SubNetwork Connection
 TCP = Termination Connection Point
 TPE = Termination Point Encapsulation

Flexibility at Lry and LRz Layers for example:

- LRx = MS
- Lry = VC4
- LRz = 140M

Figure 11: UIM related to TM Forum model and ITU-T concepts

Annex D (informative): Change history

| Change history | | | | | | | |
|----------------|-------|----------|----|-----|--|--------|---------------|
| Date | TSG # | TSG Doc. | CR | Rev | Subject/Comment | Old | New |
| 2013-03 | | | | | Approved version | 2.0.0 | 11.0.0 |
| 2014-09 | - | - | - | - | Update to Rel-12 version (MCC) | 11.0.0 | 12.0.0 |
| 2016-01 | - | - | - | - | Update to Rel-13 version (MCC) | 12.0.0 | 13.0.0 |
| 2017-03 | SA#75 | - | - | - | Promotion to Release 14 without technical change | 13.0.0 | 14.0.0 |

| Change history | | | | | | | |
|----------------|---------|-----------|------|-----|-----|--|---------------|
| Date | Meeting | TDoc | CR | Rev | Cat | Subject/Comment | New version |
| 2017-06 | SA#76 | SP-170507 | 0007 | 1 | A | Remove Editor notes and correct references | 14.1.0 |
| 2018-06 | - | - | - | - | - | Update to Rel-15 version (MCC) | 15.0.0 |
| 2019-09 | SA#85 | SP-190744 | 0014 | 2 | F | Update class definition with inheritance information | 15.1.0 |
| 2020-07 | - | - | - | - | - | Update to Rel-16 version (MCC) | 16.0.0 |
| 2024-09 | SA#105 | SP-241177 | 0021 | 1 | A | Rel-16 CR TS 28.620 correct the abbreviation of IOC | 16.1.0 |
| 2024-09 | SA#105 | SP-241168 | 0026 | - | F | Rel-16 CR TS 28.620 Correct Attribute properties | 16.1.0 |

History

| Document history | | |
|-------------------------|--------------|-------------|
| V16.0.0 | August 2020 | Publication |
| V16.1.0 | October 2024 | Publication |
| | | |
| | | |
| | | |