

ETSI TS 129 511 V18.3.0 (2024-07)



**5G;
5G System;
Equipment Identity Register Services;
Stage 3
(3GPP TS 29.511 version 18.3.0 Release 18)**



Reference

RTS/TSGC-0429511vi30

Keywords

5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
ETSI [Search & Browse Standards application](#).

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#).

Users should be aware that the present document may be revised or have its status changed,
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope	7
2 References	7
3 Definitions and abbreviations.....	8
3.1 Definitions	8
3.2 Abbreviations	8
4 Overview	8
4.1 Introduction	8
5 Services offered by the 5G-EIR NF	8
5.1 Introduction	8
5.2 N5g-eir_EquipmentIdentityCheck Service.....	9
5.2.1 Service Description.....	9
5.2.2 Service Operations	9
5.2.2.1 Introduction.....	9
5.2.2.2 CheckEquipmentIdentity.....	9
5.2.2.2.1 General	9
5.2.2.2.2 Procedure using CheckEquipmentIdentity Operation	9
6 API Definitions	10
6.1 N5g-eir_EquipmentIdentityCheck Service API	10
6.1.1 API URI.....	10
6.1.2 Usage of HTTP.....	11
6.1.2.1 General	11
6.1.2.2 HTTP standard headers	11
6.1.2.2.1 General	11
6.1.2.2.2 Content type	11
6.1.2.3 HTTP custom headers	11
6.1.2.3.1 General	11
6.1.3 Resources.....	11
6.1.3.1 Overview	11
6.1.3.2 Resource: equipmentStatus	12
6.1.3.2.1 Description	12
6.1.3.2.2 Resource Definition.....	12
6.1.3.2.3 Resource Standard Methods	12
6.1.3.2.3.1 GET.....	12
6.1.4 Data Model	13
6.1.4.1 General	13
6.1.4.2 Structured data types	14
6.1.4.2.1 Introduction	14
6.1.4.2.2 Type: EirResponseData	14
6.1.4.3 Simple data types and enumerations	14
6.1.4.3.1 Introduction	14
6.1.4.3.2 Simple data types.....	14
6.1.4.3.3 Enumeration: EquipmentStatus	15
6.1.5 Error Handling	15
6.1.5.1 General	15
6.1.5.2 Protocol Errors	15
6.1.5.3 Application Errors.....	15
6.1.6 Feature Negotiation.....	15
6.1.7 Security	16

6.1.7.1	General	16
6.1.7.2	Transport Layer Security Protection of Messages.....	16
6.1.7.3	Authorization of 5G-EIR NF Service Access	16
6.1.8	HTTP redirection.....	17
Annex A (normative):	OpenAPI specification.....	18
A.1	General	18
A.2	N5g-eir_EquipmentIdentityCheck Service API.....	18
Annex B (informative):	Change history	21
History		24

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document describes the stage 3 protocol and data model for the N5g-eir Service Based Interface between the 5G-EIR and its consumers over which the service to check the equipment identity as described in 3GPP TS 23.501 [2] is performed. It provides the stage 3 protocol definitions and message flows, and specifies the API for each service offered by the 5G-EIR.

The 5G System stage 2 architecture and procedures are specified in 3GPP TS 23.501 [2] and 3GPP TS 23.502 [3].

The Technical Realization of the Service Based Architecture and the Principles and Guidelines for Services Definition are specified in 3GPP TS 29.500 [4] and 3GPP TS 29.501 [5].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [3] 3GPP TS 23.502: "Procedures for the 5G System; Stage 2".
- [4] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [5] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [6] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".
- [7] IETF RFC 9113: "HTTP/2".
- [8] OpenAPI Initiative, "OpenAPI Specification Version 3.0.0", <https://spec.openapis.org/oas/v3.0.0>. [9] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [10] IETF RFC 9457: "Problem Details for HTTP APIs".
- [11] 3GPP TS 33.501: "Security Architecture and Procedures for 5G System".
- [12] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [13] 3GPP TS 29.510: "5G System; Network Function Repository Services; Stage 3".
- [14] 3GPP TR 21.900: "Technical Specification Group working methods".
- [15] 3GPP TS 29.524: "5G System; Cause codes mapping between 5GC interfaces; Stage 3".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

N5g-eir: Service-based interface exhibited by 5G-EIR

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

5G-EIR	5G-Equipment Identity Register
EIR	Equipment Identity Register
PEI	Permanent Equipment Identifier

4 Overview

4.1 Introduction

N5g-eir is a Service-based interface exhibited by 5G-EIR (5G-Equipment Identity Register) which is an optional network function that supports the following functionality:

- Check the status of Equipment's identity (e.g. to check that it has not been prohibited listed).

The reference point N17 (see Fig 4-1 below) shows the interaction between the 5G-Equipment Identity Register 5G-EIR and the AMF (Access and Mobility Management Function) enabling the check of the status of the mobile equipment identity.

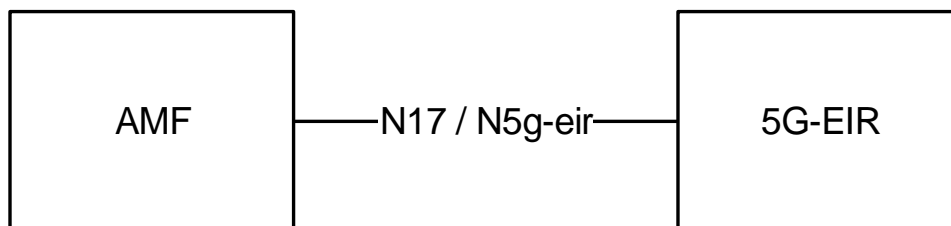


Figure 4-1: Reference Model – N5g-eir

During any procedure establishing a signalling connection with the UE the network may optionally perform an ME identity check with 5G-EIR via the N5g-eir_Equipment Identity Check Service exhibited by 5G-EIR.

5 Services offered by the 5G-EIR NF

5.1 Introduction

The following NF service is offered by the N5g-eir to check the ME whether it is prohibited listed or not:

- N5g-eir_EquipmentIdentityCheck

Table 5.1-1: NF Services provided by 5G-EIR

Service Name	Description	Consumer
N5g-eir_EquipmentIdentityCheck	This service offered by the 5G-EIR allows the consumer to check the Permanent Equipment Identifier (PEI) and check whether the PEI is in the prohibited list or not.	AMF

The N5g-eir_Equipment Identity Check service is specified in 3GPP TS 23.502 [3], clause 4.2.2.2.2

Table 5.1-2 summarizes the corresponding APIs defined for this specification.

Table 5.1-2: API Descriptions

Service Name	Clause	Description	OpenAPI Specification File	apiName	Annex
N5g-eir_EquipmentIdentityCheck	6.1	5G-EIR Equipment Identity Check Service	TS29511_N5g-eir_EquipmentIdentityCheck.yaml	n5g-eir-eic	A.2

The N5g-eir_Equipment Identity Check service is specified in 3GPP TS 23.502 [3], clause 4.2.2.2.2

5.2 N5g-eir_EquipmentIdentityCheck Service

5.2.1 Service Description

The N5g-eir_Equipment Identity Check service is provided by the 5G-EIR to check the Permanent Equipment Identifier (PEI) whether it is in the prohibited list or not. The service can be consumed by AMF which initiates ME identity check by invoking the N5g-eirEquipmentIdentityCheckGet service operation (see clause 5.2.4.2. of 3GPP TS 23.502 [3]).

During the initial registration the Permanent Equipment Identifier is obtained from the UE. The AMF operator may check the PEI with an EIR.

5.2.2 Service Operations

5.2.2.1 Introduction

5.2.2.2 CheckEquipmentIdentity

5.2.2.2.1 General

The CheckEquipmentIdentity operation shall be used to check the PEI and determine whether the subscriber is allowed to use the equipment, in the following procedures:

- ME Identity check procedure (see clause 4.7 of 3GPP TS 23.502 [3]);

5.2.2.2.2 Procedure using CheckEquipmentIdentity Operation

The NF Service Consumer (e.g. AMF) shall check the PEI by using the HTTP GET method as shown in Figure 5.2.2.2.2-1.

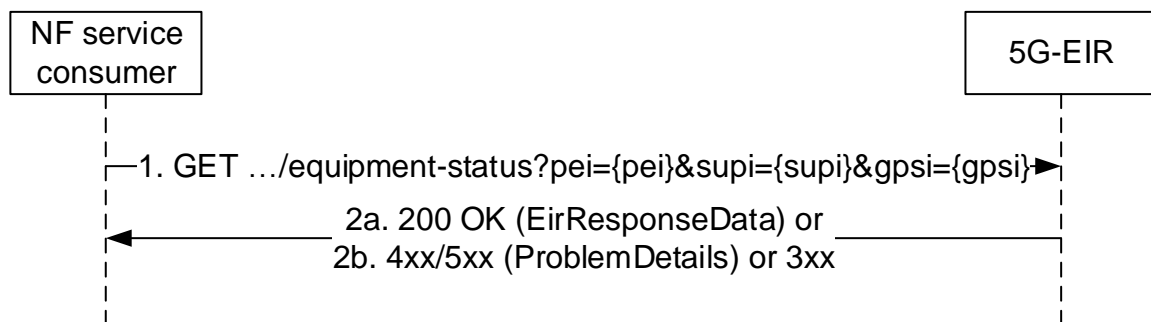


Figure 5.2.2.2-1: PEI status check by the NF Service Consumer

1. The NF Service Consumer (e.g. AMF) sends a GET request to the resource representing the PEI equipment Status. It shall include the PEI as a query parameter and, optionally, the SUPI and/or GPSI may also be included.
- 2a. On success, "200 OK" with the message body containing the equipment status of the PEI.
- 2b. If the PEI is not known, "404 Not Found" with the message body containing a ProblemDetails object, with the "details" attribute set to "ERROR_EQUIPMENT_UNKNOWN". When receiving the response from the 5G-EIR, the NF Service Consumer (e.g. AMF) shall check the equipment Status and the detailed problem. Dependent upon the result, the NF Service Consumer will decide its subsequent actions (e.g. sending a Registration Reject if the 5G-EIR indicates that the PEI is unknown or prohibited listed).

The definition of the equipment-status resource is specified in clause 6.1.3.

6 API Definitions

6.1 N5g-eir_EquipmentIdentityCheck Service API

6.1.1 API URI

The N5g-eir_EquipmentIdentityCheck Service shall use the N5g-eir_EquipmentIdentityCheck API.

The API URI of the N5g-eir_EquipmentIdentityCheck API shall be:

{apiRoot}/<apiName>/<apiVersion>

The request URI used in HTTP request from the NF service consumer towards the NF service producer shall have the structure defined in subclause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].
- The <apiName> shall be "n5g-eir-eic".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in subclause 6.1.3.

6.1.2 Usage of HTTP

6.1.2.1 General

HTTP/2, as defined in IETF RFC 9113 [7], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

HTTP messages and bodies for the N5g-eir_EquipmentIdentityCheck Service shall comply with the OpenAPI [8] specification contained in Annex A.

6.1.2.2 HTTP standard headers

6.1.2.2.1 General

The usage of HTTP standard headers shall be supported as specified in clause 5.2.2 of 3GPP TS 29.500 [4].

6.1.2.2.2 Content type

The following content types shall be supported:

- JSON, as defined in IETF RFC 8259 [9]. The use of the JSON format shall be signalled by the content type "application/json". See also clause 5.4 of 3GPP TS 29.500 [4].
- The Problem Details JSON Object (IETF RFC 9457 [10]). The use of the Problem Details JSON object in a HTTP response body shall be signalled by the content type "application/problem+json".

6.1.2.3 HTTP custom headers

6.1.2.3.1 General

In this release of this specification, no custom headers specific to the N5g-eir_EquipmentIdentityCheck Service are defined. For 3GPP specific HTTP custom headers used across all service based interfaces, see clause 5.2.3 of 3GPP TS 29.500 [4].

6.1.3 Resources

6.1.3.1 Overview

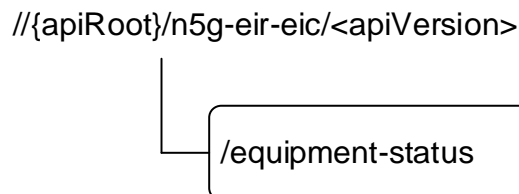


Figure 6.1.3.1-1: Resource URI structure of the n5g-eir-eic API

Table 6.1.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.1.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
equipmentStatus	/equipment-status	GET	Retrieve the equipment status of the PEI

6.1.3.2 Resource: equipmentStatus

6.1.3.2.1 Description

This resource represents the equipmentStatus for a PEI.

6.1.3.2.2 Resource Definition

Resource URI: {apiRoot}/n5g-eir-eic/<apiVersion>/equipment-status

This resource shall support the resource URI variables defined in table 6.1.3.2.2-1.

Table 6.1.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.1.1

6.1.3.2.3 Resource Standard Methods

6.1.3.2.3.1 GET

This method shall support the URI query parameters specified in table 6.1.3.2.3.1-1.

Table 6.1.3.2.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
pei	Pei	M	1	The PEI of the UE shall be included for equipment identify checking
supi	Supi	O	0..1	The SUPI of the UE
gpsi	Gpsi	O	0..1	The GPSI of the UE
supported-features	SupportedFeatures	C	0..1	This IE shall be present if at least one feature defined in clause 6.1.6 is supported.

This method shall support the request data structures specified in table 6.1.3.2.3.1-2 and the response data structures and response codes specified in table 6.1.3.2.3.1-3.

Table 6.1.3.2.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 6.1.3.2.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
EirResponseData	M	1	200 OK	Upon success, a response body containing the Equipment Status shall be returned
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing a different URI, or the same URI if this is a redirection triggered by an SCP to the same target resource via another SCP. In the former case, the URI shall be an alternative URI of the resource located on an alternative service instance within the same 5G-EIR or 5G-EIR (service) set. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing a different URI, or the same URI if this is a redirection triggered by an SCP to the same target resource via another SCP. In the former case, the URI shall be an alternative URI of the resource located on an alternative service instance within the same 5G-EIR or 5G-EIR (service) set. (NOTE 2)
ProblemDetails	O	0..1	404 Not Found	The equipment identify checking has failed. The "cause" attribute may be used to indicate one of the following application errors: - ERROR_EQUIPMENT_UNKNOWN See table 6.1.5.3-1 for the description of this error.
NOTE : The mandatory HTTP error status codes for the GET method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] other than those specified in the table above also apply, with a ProblemDetails data type when needed (see clause 5.2.7 of 3GPP TS 29.500 [4]).				
NOTE 2: RedirectResponses may be inserted by an SCP, see clause 6.10.9.1 of 3GPP TS 29.500 [4].				

Table 6.1.3.2.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same 5G-EIR or 5G-EIR (service) set. Or the same URI, if a request is redirected to the same target resource via a different SCP.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 6.1.3.2.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located on an alternative service instance within the same 5G-EIR or 5G-EIR (service) set. Or the same URI, if a request is redirected to the same target resource via a different SCP.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

6.1.4 Data Model

6.1.4.1 General

This clause specifies the application data model supported by the API.

Table 6.1.4.1-1 specifies the data types defined for the n5g-eir-eic service based interface protocol.

Table 6.1.4.1-1: n5g-eir-eic specific Data Types

Data type	Clause defined	Description
EirResponseData	6.1.4.2.2	
EquipmentStatus	6.1.4.3.3	Equipment status of the PEI, this data type is string.

Table 6.1.6.1-2 specifies data types re-used by the N_{<NF>} service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the N_{<NF>} service based interface.

Table 6.1.4.1-2: 5g-eir-eic re-used Data Types

Data type	Reference	Comments
Pei	3GPP TS 29.571 [6]	Data type representing the PEI of the UE.
Supi	3GPP TS 29.571 [6]	Data type representing the SUPI of the subscriber. pattern: See pattern of type Supi in 3GPP TS 29.571 [6]
ProblemDetails	3GPP TS 29.571 [6]	Common data type for error responses
Gpsi	3GPP TS 29.571 [6]	Data type representing the GPSI of the subscriber.
SupportedFeatures	3GPP TS 29.571 [6]	Supported Features
RedirectResponse	3GPP TS 29.571 [6]	Response body of the redirect response message.

6.1.4.2 Structured data types

6.1.4.2.1 Introduction

This clause defines the structures to be used in resource representations.

6.1.4.2.2 Type: EirResponseData

Table 6.1.4.2.2-1: Definition of type EirResponseData

Attribute name	Data type	P	Cardinality	Description
status	EquipmentStatus	M	1	Status of the UE

6.1.4.3 Simple data types and enumerations

6.1.4.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.1.4.3.2 Simple data types

The simple data types defined in table 6.1.4.3.2-1 shall be supported.

Table 6.1.4.3.2-1: Simple data types

Type Name	Type Definition	Description
	<one simple data type, e.g. boolean, integer, null, number, string>	

6.1.4.3.3 Enumeration: EquipmentStatus

Table 6.1.4.3.3-1: Enumeration EquipmentStatus

Enumeration value	Description
"WHITELISTED"	Indicates the PEI is permitted whitelisted
"BLACKLISTED"	Indicates the PEI is prohibited listed
"GREYLISTED"	Indicates the PEI is tracking listed

6.1.5 Error Handling

6.1.5.1 General

HTTP error handling shall be supported as specified in clause 5.2.4 of 3GPP TS 29.500 [4].

The Cause codes mapping performed by AMF between the following HTTP responses returned by the EIR services to the AMF and the 5GMM related values is specified in clause 4.5.2 of 3GPP TS 29.524 [15].

6.1.5.2 Protocol Errors

Protocol Error Handling shall be supported as specified in clause 5.2.7 of 3GPP TS 29.500 [4].

6.1.5.3 Application Errors

The common application errors defined in the Table 5.2.7.2-1 in 3GPP TS 29.500 [4] may also be used for the N5g-eir_EquipmentIdentityCheck service, and the following application errors listed in Table 6.1.5.3-1 are specific for the N5g-eir_EquipmentIdentityCheck service.

Table 6.1.5.3-1: Application errors

Application Error	HTTP status code	Description
ERROR_EQUIPMENT_UNKNOWN	404 Not Found	Indicate the mobile equipment is not known in the EIR.

6.1.6 Feature Negotiation

The features in table 6.1.6-1 are defined for the N5g-eir_EquipmentIdentityCheck API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

Table 6.1.6-1: Supported Features

Feature number	Feature Name	M/O	Description
1	ES3XX	M	<p>Extended Support of HTTP 307/308 redirection</p> <p>An NF Service Consumer (e.g. AMF) that supports this feature shall support handling of HTTP 307/308 redirection for any service operation of the EquipmentIdentityCheck service. An NF Service Consumer that does not support this feature does only support HTTP redirection as specified for 3GPP Release 15.</p>

6.1.7 Security

6.1.7.1 General

The security mechanisms for service based interfaces are specified in clause 13 of 3GPP TS 33.501 [11] and in clause 6.7.3 of 3GPP TS 29.500 [4]. The access to the N5g-eir_EquipmentIdentityCheck API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [12]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [13]) plays the role of the authorization server.

The N5g-eir_EquipmentIdentityCheck API defines scopes for OAuth2 authorization as specified in 3GPP TS 33.501 [11]; it defines a single scope consisting on the name of the service (i.e., "n5g-eir-eic"), and it does not define any additional scopes at resource or operation level.

Security Protection Edge Proxy (SEPP), as specified in 3GPP TS 33.501 [11], shall be used between service based interfaces across PLMNs. The NFs in a PLMN shall use the SEPP as a HTTP/2 proxy for the HTTP/2 messages that carry ":authority" pseudo header with a uri-host formatted as specified in clause 6.1.4.3 of 3GPP TS 29.500 [4]

6.1.7.2 Transport Layer Security Protection of Messages

As specified in clause 13.1 of 3GPP TS 33.501 [11], TLS shall be used for the security protection of messages at the transport layer for the N5g-eir service based interface if network security is not provided by other means.

The protocol stack for the N5g-eir service based interface is shown on Figure 6.1.7.2-1.

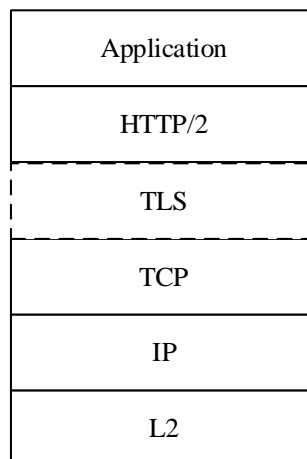


Figure 6.1.7.2-1: SBI Protocol Stack

The N5g-eir service based interface uses HTTP/2 protocol (see clause 5.2) with JSON (see clause 5.4) as the application layer serialization protocol. For the security protection at the transport layer, 5G-EIR NF shall support TLS and TLS shall be used within a PLMN if network security is not provided by other means, as specified in 3GPP TS 33.501 [11].

6.1.7.3 Authorization of 5G-EIR NF Service Access

As specified in clause 13.4.1 of 3GPP TS 33.501 [11] OAuth 2.0 (see IETF RFC 6749 [12]) may be used for authorization of N5g-eir_EquipmentIdentityCheck service access. The 5G-EIR NF and the NRF (as defined in 3GPP TS 29.510 [13]) shall support the OAuth 2.0 authorization framework with "Client Credentials" grant type as specified in clause 4.4 of IETF RFC 6749 [12]. The NRF shall act as the Authorization Server providing the access tokens to the NF service consumers to access the service provided by the 5G-EIR. If the 5G-EIR NF receives an OAuth 2.0 authorization token in the "Authorization" HTTP request header field, the N5g-eir_EquipmentIdentityCheck service shall validate the access token, its expiry and its access scope before allowing access to the requested resource, as specified in clause 7 of IETF RFC 6749 [12].

6.1.8 HTTP redirection

An HTTP request may be redirected to a different 5G-EIR service instance, within the same 5G-EIR or a different 5G-EIR of an 5G-EIR set, e.g. when an 5G-EIR service instance is part of an 5G-EIR (service) set or when using indirect communications (see 3GPP TS 29.500 [4]). See also the ES3XX feature in clause 6.1.6.

An SCP that reselects a different 5G-EIR producer instance will return the NF Instance ID of the new 5G-EIR producer instance in the 3gpp-Sbi-Producer-Id header, as specified in clause 6.10.3.4 of 3GPP TS 29.500 [4].

If an 5G-EIR within an 5G-EIR set redirects a service request to a different 5G-EIR of the set using an 307 Temporary Redirect or 308 Permanent Redirect status code, the identity of the new 5G-EIR towards which the service request is redirected shall be indicated in the 3gpp-Sbi-Target-Nf-Id header of the 307 Temporary Redirect or 308 Permanent Redirect response as specified in clause 6.10.9.1 of 3GPP TS 29.500 [4].

Annex A (normative): OpenAPI specification

A.1 General

This Annex specifies the formal definition of the N5g-eir_EquipmentIdentityCheck Service API. It consists of an OpenAPI 3.0.0 specification, in YAML format.

This Annex takes precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

NOTE : The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository that uses the GitLab software version control system (see 3GPP TS 29.501 [5] clause 5.3.1 and 3GPP TR 21.900 [14] clause 5B).

A.2 N5g-eir_EquipmentIdentityCheck Service API

```
openapi: 3.0.0
```

```
info:
```

```
  version: '1.3.0'
  title: '5G-EIR Equipment Identity Check'
  description: |
    5G-EIR Equipment Identity Check Service.
    © 2024, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
```

```
externalDocs:
```

```
  description: 3GPP TS 29.511 V18.3.0; 5G System; Equipment Identity Register Services; Stage 3
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.511/'
```

```
servers:
```

```
- url: '{apiRoot}/n5g-eir-eic/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501
```

```
security:
```

```
- {}
- oAuth2ClientCredentials:
  - n5g-eir-eic
```

```
paths:
```

```
  /equipment-status:
    get:
      summary: Retrieves the status of the UE
      operationId: GetEquipmentStatus
      tags:
        - Equipment Status (Document)
      parameters:
        - name: pei
          in: query
          description: PEI of the UE
          required: true
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/Pei'
        - name: supi
          in: query
          description: SUPI of the UE
          required: false
```

```

    schema:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi '
  - name: gpsi
    in: query
    description: GPSI of the UE
    required: false
    schema:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi '
  - name: supported-features
    in: query
    description: supported features of the NF consumer
    schema:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures '
responses:
  '200':
    description: Expected response to a valid request
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/EirResponseData '
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307 '
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308 '
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400 '
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401 '
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403 '
  '404':
    description: PEI Not Found
    content:
      application/problem+json:
        schema:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails '
  '406':
    $ref: 'TS29571_CommonData.yaml#/components/responses/406 '
  '414':
    $ref: 'TS29571_CommonData.yaml#/components/responses/414 '
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429 '
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500 '
  '502':
    $ref: 'TS29571_CommonData.yaml#/components/responses/502 '
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503 '
default:
  description: Unexpected error

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            n5g-eir-eic: Access to the N5g-eir_EquipmentIdentityCheck API
schemas:
  EirResponseData:
    description: Represents equipment status data provided in an EIR response message.
    type: object
    required:
      - status
    properties:
      status:
        $ref: '#/components/schemas/EquipmentStatus '
  EquipmentStatus:
    description: Represents equipment status of the PEI. This data type is a string.
    type: string
    enum:
      - WHITELISTED # PERMITTED
      - BLACKLISTED # PROHIBITED
      - GREYLISTED # TRACKING

```


Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2017-10	CT4#80	C4-175323				Initial Draft.	0.1.0
2017-10	CT4#80	C4-175396				At CT4#80 approved pCRs C4-175323, C4-175324, C4-175325, C4-175326 incorporated.	0.2.0
2017-12	CT4#81	C4-176439				At CT4#81 approved pCRs C4-176428, C4-176429 incorporated	0.3.0
2018-03	CT4#83	C4-182436				At CT4#83 approved pCRs C4-182368, C4-182369, C4-182384 incorporated.	0.4.0
2018-03	CT#79	CP-180032				Presented for information	1.0.0
2018-05	CT4#85	C4-184627				At CT4#85 approved pCRs C4-184475, C4-184476, C4-184628 incorporated.	1.1.0
2018-06	CT#80	CP-181106				Presented for approval	2.0.0
2018-06	CT#80					Approved in CT#80.	15.0.0
2018-09	CT#81	CP-182061	0001	-	F	Error Handling	15.1.0
2018-09	CT#81	CP-182061	0002	-	F	Description of Structured data types	15.1.0
2018-09	CT#81	CP-182061	0003	-	F	Update of Resource Figure	15.1.0
2018-09	CT#81	CP-182061	0004	-	F	API Version Number Update	15.1.0
2018-12	CT#82	CP-183178	0005	2	F	5G-EIR OpenAPI Updates	15.2.0
2018-12	CT#82	CP-183019	0007	-	F	APIRoot Clarification	15.2.0
2018-12	CT#82	CP-183019	0008	-	F	Common Status codes	15.2.0
2018-12	CT#82	CP-183019	0009	1	F	API Version Update	15.2.0
2018-12	CT#82	CP-183198	00010	1	F	Correction of "externalDocs" for N5g-eir_EquipmentIdentityCheck Service	15.2.0
2019-03	CT#83	CP-190024	0012	1	F	GPSI	15.3.0
2019-03	CT#83	CP-190024	0014	1	F	Reuse of data types in EIR OpenAPI	15.3.0
2019-03	CT#83	CP-190024	0015	-	F	API Version Update	15.3.0
2019-06	CT#84	CP-191035	0017	2	F	Storage of OpenAPI specification files	15.4.0
2019-06	CT#84	CP-191035	0018	-	F	Copyright Note in YAML file	15.4.0
2019-06	CT#84	CP-191035	0019	-	F	Wrong formatting in OpenAPI annex	15.4.0
2019-06	CT#84	CP-191035	0020	-	F	3GPP TS 29.511 API version update	15.4.0
2019-11	CT#84	CP-193036	0022	1	F	Add reference to TS 29.524	16.0.0
2019-12	CT#84	CP-193121	0024	-	F	ExternalDocs field and API version change in the OpenAPI	16.0.0
2020-03	CT#87e	CP-200039	0025	2	F	Add Corresponding API descriptions in clause 5.1	16.1.0
2020-03	CT#87e	CP-200039	0028	2	D	Editorial corrections	16.1.0
2020-03	CT#87e	CP-200020	0029	1	B	Optionality of ProblemDetails	16.1.0
2020-03	CT#87e	CP-200035	0030	-	B	SUPI pattern	16.1.0
2020-04	CT#88e	CP-201064	0032	1	F	Datatype column in Resource URI variables Table	16.2.0
2020-06	CT#88e	CP-201034	0033	-	B	Storage of YAML files	16.2.0
2020-06	CT#88e	CP-201332	0034	1	F	API Version and ExternalDoc Version Update	16.2.0
2020-12	CT#90e	CP-203035	0036	-	F	Storage of YAML files in 3GPP Forge	16.3.0
2021-03	CT#91e	CP-210037	0038		F	HTTP 3xx redirection	16.4.0
2021-03	CT#91e	CP-210054	0041		F	29.511 Rel-16 API version and External doc update	16.4.0
2021-03	CT#91e	CP-210026	0037		D	Use of inclusive terminology	17.0.0
2021-03	CT#91e	CP-210034	0039		F	OpenAPI Reference	17.0.0
2021-03	CT#91e	CP-210029	0040		F	29.511 Rel-17 API version and External doc update	17.0.0
2021-06	CT#91e	CP-211028	0042		F	backward compatible correction	17.1.0
2021-06	CT#92e	CP-211059	0044	2	F	backward compatible correction	17.1.0
2021-06	CT#92e	CP-211050	0045	-	F	29.511 Rel-17 API version and External doc update	17.1.0
2021-09	CT#93e	CP-212060	0048		A	3xx description correction for SCP	17.2.0
2022-06	CT#96	CP-221027	0051		F	Correction of typos in description fields	17.3.0
2022-06	CT#96	CP-221304	0053		F	29.511 Rel17 API version and External doc update	17.3.0
2022-12	CT#98e	CP-223027	0055	1	F	Missing Mandatory Status Codes in OpenAPI	18.0.0
2022-12	CT#98e	CP-223033	0056		F	29.511 Rel18 API version and External doc update	18.0.0
2023-09	CT#101	CP-232058	0057	1	F	Major API version	18.1.0
2023-12	CT#102	CP-233028	0058		F	Update and replace obsoleted HTTP RFCs	18.2.0
2023-12	CT#102	CP-233031	0059		F	Replacing obsoleted HTTP RFC 7807 with 9457	18.2.0

2024-06	CT#104	CP-242034	0060		F	Correction of feature negotiation description	18.3.0
2024-06	CT#104	CP-242551	0061		F	29.511 Rel18 API version and External doc update	18.3.0

History

Document history		
V18.2.0	May 2024	Publication
V18.3.0	July 2024	Publication