

# ETSI TS 129 526 V19.2.0 (2026-01)



TECHNICAL SPECIFICATION

**5G;  
5G System;  
Network Slice-Specific and SNPN  
Authentication and Authorization services;  
Stage 3  
(3GPP TS 29.526 version 19.2.0 Release 19)**



---

Reference

RTS/TSGC-0429526vj20

---

Keywords

5G

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from the  
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#) repository.

Users should be aware that the present document may be revised or have its status changed, this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our [Coordinated Vulnerability Disclosure \(CVD\)](#) program.

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2026.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	6
1 Scope .....	8
2 References .....	8
3 Definitions, abbreviations .....	9
3.1 Definitions .....	9
3.2 Abbreviations .....	9
4 Overview .....	9
4.1 Introduction .....	9
5 Services offered by the NSSAAF.....	10
5.1 Introduction .....	10
5.2 Nnssaaf_NSSAA Service .....	10
5.2.1 Service Description.....	10
5.2.2 Service Operations .....	10
5.2.2.1 Introduction .....	10
5.2.2.2 Authenticate .....	11
5.2.2.2.1 General .....	11
5.2.2.3 Re-Authentication Notification .....	13
5.2.2.3.1 General .....	13
5.2.2.4 Revocation Notification .....	15
5.2.2.4.1 General .....	15
5.3 Nnssaaf_AIW Service .....	16
5.3.1 Service Description.....	16
5.3.2 Service Operations .....	16
5.3.2.1 Introduction .....	16
5.3.2.2 Authenticate .....	16
5.3.2.2.1 General .....	16
6 API Definitions .....	18
6.1 Nnssaaf_NSSAA Service API.....	18
6.1.1 Introduction.....	18
6.1.2 Usage of HTTP .....	19
6.1.2.1 General .....	19
6.1.2.2 HTTP standard headers .....	19
6.1.2.2.1 General .....	19
6.1.2.2.2 Content type .....	19
6.1.2.3 HTTP custom headers .....	19
6.1.3 Resources.....	19
6.1.3.1 Overview.....	19
6.1.3.2 Resource: slice-authentications (Collection).....	20
6.1.3.2.1 Description .....	20
6.1.3.2.2 Resource Definition.....	20
6.1.3.2.3 Resource Standard Methods .....	20
6.1.3.2.4 Resource Custom Operations .....	22
6.1.3.3 Resource: slice-authentication (Document) .....	22
6.1.3.3.1 Description .....	22
6.1.3.3.2 Resource Definition.....	22
6.1.3.3.3 Resource Standard Methods .....	22
6.1.3.3.4 Resource Custom Operations .....	24
6.1.4 Custom Operations without associated resources .....	24
6.1.4.1 Overview.....	24

6.1.5	Notifications .....	24
6.1.5.1	General .....	24
6.1.5.2	Re-authentication Notification .....	24
6.1.5.2.1	Description .....	24
6.1.5.2.2	Target URI.....	24
6.1.5.2.3	Standard Methods.....	25
6.1.5.3	Revocation Notification .....	25
6.1.5.3.1	Description .....	25
6.1.5.3.2	Target URI.....	25
6.1.5.3.3	Standard Methods.....	26
6.1.6	Data Model .....	26
6.1.6.1	General .....	26
6.1.6.2	Structured data types .....	27
6.1.6.2.1	Introduction .....	27
6.1.6.2.2	Type: SliceAuthInfo .....	28
6.1.6.2.3	Type: SliceAuthContext .....	28
6.1.6.2.4	Type: SliceAuthConfirmationData .....	28
6.1.6.2.5	Type: SliceAuthConfirmationResponse .....	29
6.1.6.2.6	Type: SliceAuthReauthNotification .....	29
6.1.6.2.7	Type: SliceAuthRevocNotification .....	29
6.1.6.3	Simple data types and enumerations .....	29
6.1.6.3.1	Introduction .....	29
6.1.6.3.2	Simple data types.....	29
6.1.6.3.3	Enumeration: SliceAuthNotificationType .....	30
6.1.6.4	Data types describing alternative data types or combinations of data types .....	30
6.1.6.5	Binary data .....	30
6.1.7	Error Handling .....	30
6.1.7.1	General .....	30
6.1.7.2	Protocol Errors .....	30
6.1.7.3	Application Errors.....	30
6.1.8	Feature negotiation .....	31
6.1.9	Security .....	31
6.1.10	HTTP redirection.....	31
6.2	Nnssaaf_AIW Service API.....	31
6.2.1	Introduction.....	31
6.2.2	Usage of HTTP .....	32
6.2.2.1	General .....	32
6.2.2.2	HTTP standard headers .....	32
6.2.2.2.1	General .....	32
6.2.2.2.2	Content type .....	32
6.2.2.3	HTTP custom headers .....	32
6.2.3	Resources.....	32
6.2.3.1	Overview.....	32
6.2.3.2	Resource: authentications (Collection) .....	33
6.2.3.2.1	Description .....	33
6.2.3.2.2	Resource Definition.....	33
6.2.3.2.3	Resource Standard Methods .....	33
6.2.3.3	Resource: authentication (Document).....	35
6.2.3.3.1	Description .....	35
6.2.3.3.2	Resource Definition.....	35
6.2.3.3.3	Resource Standard Methods .....	35
6.2.4	Custom Operations without associated resources .....	37
6.2.5	Notifications .....	37
6.2.6	Data Model .....	37
6.2.6.1	General .....	37
6.2.6.2	Structured data types .....	38
6.2.6.2.1	Introduction .....	38
6.2.6.2.2	Type: AuthInfo .....	38
6.2.6.2.3	Type: AuthContext .....	38
6.2.6.2.4	Type: AuthConfirmationData .....	38
6.2.6.2.5	Type: AuthConfirmationResponse .....	39
6.2.6.3	Simple data types and enumerations .....	39

6.2.6.3.1	Introduction .....	39
6.2.6.3.2	Simple data types.....	39
6.2.7	Error Handling .....	39
6.2.7.1	General .....	39
6.2.7.2	Protocol Errors .....	39
6.2.7.3	Application Errors .....	39
6.2.8	Feature negotiation .....	40
6.2.9	Security .....	40
6.2.10	HTTP redirection .....	40
<b>Annex A (normative):</b>	<b>OpenAPI specification.....</b>	<b>41</b>
A.1	General .....	41
A.2	Nnssaaf_NSSAA API.....	41
A.3	Nnssaaf_AIW API.....	47
<b>Annex B (informative):</b>	<b>Change history .....</b>	<b>51</b>
History .....		54

---

# Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

**might not** indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

**is** (or any other verb in the indicative mood) indicates a statement of fact

**is not** (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

---

# 1 Scope

The present document specifies the stage 3 protocol and data model for the Nnssaaf Service Based Interface. It provides stage 3 protocol definitions and message flows, and specifies the API for each service offered by the NSSAAF.

The 5G System stage 2 architecture and procedures are specified in 3GPP TS 23.501 [2] and 3GPP TS 23.502 [3].

The Technical Realization of the Service Based Architecture and the Principles and Guidelines for Services Definition are specified in 3GPP TS 29.500 [4] and 3GPP TS 29.501 [5].

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [3] 3GPP TS 23.502: "Procedures for the 5G System; Stage 2".
- [4] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [5] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [6] OpenAPI: "OpenAPI Specification Version 3.0.0", <https://spec.openapis.org/oas/v3.0.0>.
- [7] 3GPP TR 21.900: "Technical Specification Group working methods".
- [8] 3GPP TS 33.501: "Security architecture and procedures for 5G system".
- [9] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [10] 3GPP TS 29.510: "5G System; Network Function Repository Services; Stage 3".
- [11] IETF RFC 9113: "HTTP/2".
- [12] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [13] IETF RFC 9457: "Problem Details for HTTP APIs".
- [14] IETF RFC 4648: "The Base16, Base32 and Base64 Data Encodings".
- [15] 3GPP TS 29.503: "5G System; Unified Data Management Services; Stage 3".
- [16] 3GPP TS 29.518: "5G System; Access and Mobility Management Services; Stage 3".
- [17] 3GPP TS 29.536: "5G System; Network Slice Admission Control Services; Stage 3".
- [18] 3GPP TS 29.509: "5G System; Authentication Server Services; Stage 3".
- [19] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".

## 3 Definitions, abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

### 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

NSSAA	Network Slice-Specific Authentication and Authorization
NSSAAF	Network Slice-specific and SNPN Authentication and Authorization Function
SNPN	Standalone Non-Public Network

## 4 Overview

### 4.1 Introduction


Within the 5GC, the NSSAAF offers services to the AMF and the AUSF via the Nnssaaf service-based interface.

The AMF shall make use of the NSSAAF service when it needs to invoke network slice-specific authentication and authorization for a specific UE and a specific S-NSSAI (see 3GPP TS 23.502 [3] clause 4.2.9.2, and 3GPP TS 33.501 [14] clause 16.2 and 16.3).

The NSSAAF service shall also be used by the AMF to receive slice re-authentication notification or slice authorization revocation notification sent from the AAA-S (see 3GPP TS 23.502 [3] clause 4.2.9.3, 4.2.9.4 and 3GPP TS 33.501 [14] clause 16.3 and 16.4).

The AUSF shall make use of the NSSAAF service when it needs to invoke a primary authentication in SNPN with Credentials holder using AAA server; the AUSF shall also make use of this service during the UE onboarding procedure in SNPN scenarios, when the Default Credentials Server (DCS) uses an AAA server for primary authentication.

Figure 4.1-1 provides the reference model with focus on the NSSAAF.

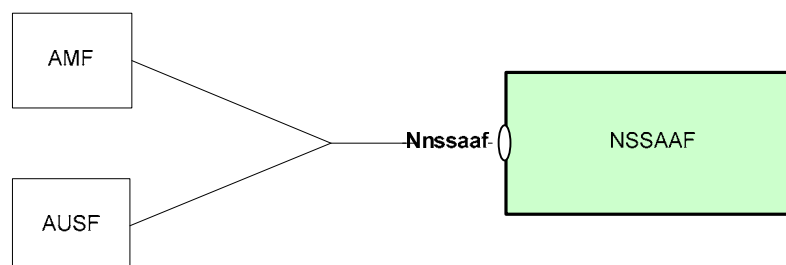

**Figure 4.1-1: Reference model – NSSAAF**

## 5 Services offered by the NSSAAF

### 5.1 Introduction

The NSSAAF offers the following services via the Nnssaaf interface:

- Nnssaaf\_NSSAA Service
- Nnssaaf\_AIW Service

Table 5.1-1 summarizes the corresponding APIs defined for this specification.

**Table 5.1-1: API Descriptions**

Service Name	Clause	Description	OpenAPI Specification File	apiName	Annex
Nnssaaf_NSSAA	5.2	Slice-specific authentication and authorization service	TS29526_Nnssaaf_NSSAA.yaml	nssaaf-nssaa	A.2
Nnssaaf_AIW	5.3	AAA Interworking service	TS29526_Nnssaaf_AIW.yaml	nssaaf-aiw	A.3

### 5.2 Nnssaaf\_NSSAA Service

#### 5.2.1 Service Description

The Nnssaaf\_NSSAA service provides slice-specific authentication and authorization for a given UE. The NSSAAF is acting as NF Service Producer, while the AMF is the NF Service Consumer.

Following functionalities are provided by the Nnssaaf\_NSSAA service:

- Perform slice-specific authentication and authorization for a given UE;
- Trigger slice-specific re-authentication to a given UE;
- Revoke the slice-specific authentication and authorization for a given UE.

The Nnssaaf\_NSSAA service supports the following service operations.

**Table 5.2.1-1: Service operations supported by the Nnssaaf\_NSSAA service**

Service Operations	Description	Operation Semantics	Example Consumer(s)
Authenticate	Perform slice-specific authentication and authorization for a given UE.	Request/Response	AMF
Re-Authentication Notification	Request slice-specific re-authentication and re-authorization for a given UE.	Callback	AMF
Revocation Notification	Request revocation of slice-specific authentication and authorization result for a given UE.	Callback	AMF

#### 5.2.2 Service Operations

##### 5.2.2.1 Introduction


See Table 5.2.1-1 for an overview of the service operations supported by the Nnssaaf\_NSSAA service.

### 5.2.2.2 Authenticate

#### 5.2.2.2.1 General

The Authenticate service operation permits the NF Service Consumer (i.e. the AMF) to initiate slice-specific authentication and authorization, e.g. during a UE Registration procedure or upon reception of a re-authentication notification from the NSSAAF (see clause 5.2.2.3). The NSSAAF may relay the EAP message to an AAA-S and collect the result of slice-specific authentication and authorization from the AAA-S, as specified in clause 4.2.9.2 of 3GPP TS 23.502 [3], and clause 16.3 of 3GPP TS 33.501 [8].

The NF Service Consumer (i.e. the AMF) shall send a POST request to the resource representing slice authentication collection (i.e. .../slice-authentications) to request the NSSAAF to create the corresponding resource context and perform slice-specific authentication and authorization.

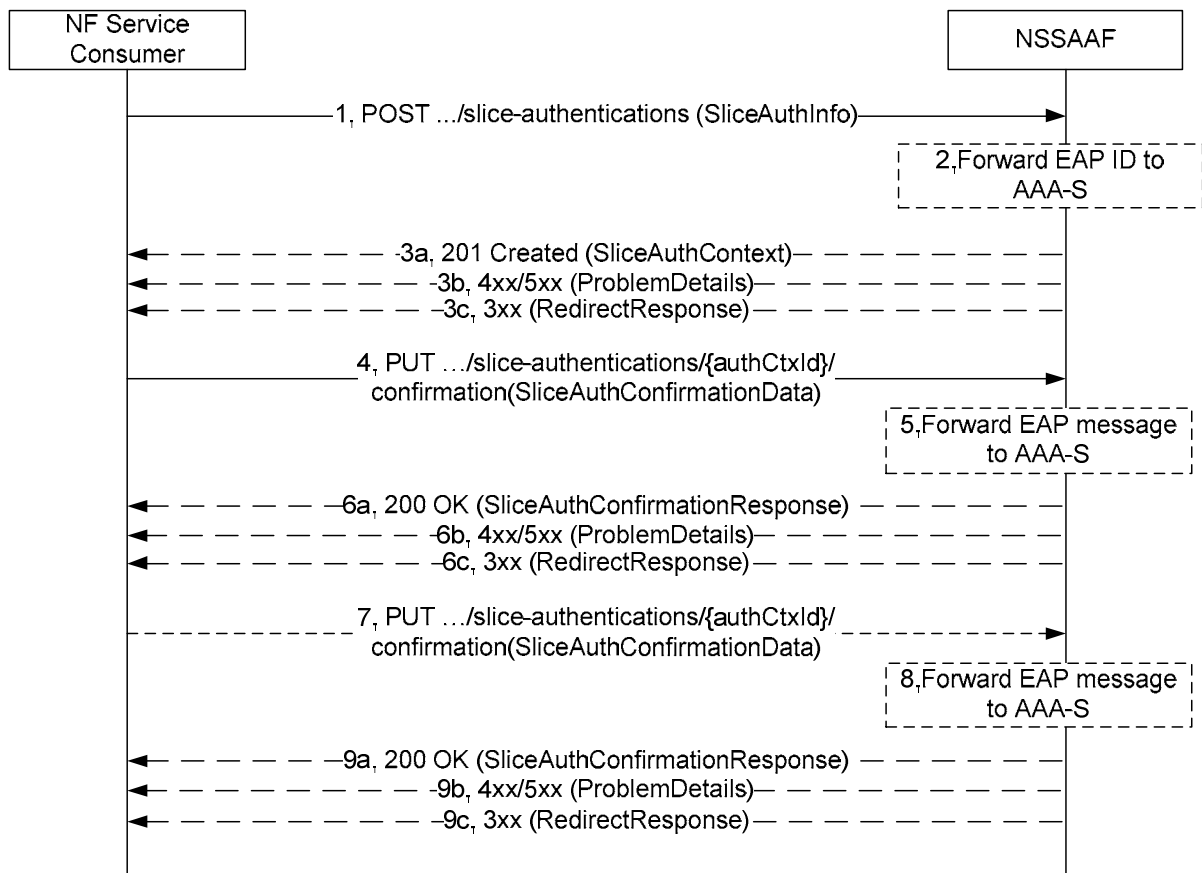

**Figure 5.2.2.1-1: Slice-Specific Authentication and Authorization**

1. The NF Service Consumer (AMF) shall send a POST request to the NSSAAF, targeting the resource of slice authentication collection (i.e. .../slice-authentications), to perform slice-specific authentication and authorization.

The HTTP content shall contain the slice authentication information, which includes:

- UE ID (i.e. GPSI), if multiple GPSIs received from the UDM, the NF Service Consumer shall include any one of the GPSIs.
- S-NSSAI
- EAP ID Response message (if it is received from the UE), or the EAP ID Response message with EAP ID stored, or the EAP ID Response message with Null value (if EAP ID is not requested or received);
- optionally, the callback URI of the AMF to receive re-authentication notification from the NSSAAF;

- optionally, the callback URI of the AMF to receive revocation notification from the NSSAAF.

Based on local policy, the AMF may determine to provide callback URI(s) for receiving re-authentication notification or revocation notification. For example, the callback URIs are provided for an UE identified with low mobility characteristic.

If Slice-Specific Authentication and Authorization is triggered by the AMF during a Registration procedure as described in clause 4.2.9.2 of 3GPP TS 23.502 [3], the AMF shall set "status" attribute for the given slice listed in "nssaaStatusList" attribute to "PENDING" (See 3GPP TS 29.518 [16]).

2. The NSSAAF creates slice authentication context for the UE, and starts the slice-specific authentication and authorization procedure. If the AAA-S is involved in slice-specific authentication and authorization procedure, the NSSAAF shall forward the EAP ID Response message to the AAA-S if the EAP ID Response message does not contain the Null value. Depending on the result, either step 3a or step 3b is performed. The NSSAAF obtains the AAA-S address from local configuration, based on S-NSSAI.
- 3a. On success, "201 Created" shall be returned. The "Location" header shall contain the URI of the created resource (e.g. .../slice-authentications/{authCtxId}). The content shall contain the slice authentication context, which includes the EAP message generated by the NSSAAF or from the AAA-S. The NF Service Consumer (i.e. the AMF) shall forward the received EAP message to the UE in NAS message, as specified in clause 4.2.9.2 of 3GPP TS 23.502 [3].
- 3b. On failure, one of the HTTP status code listed in Table 6.1.7.3-1 shall be returned. For a 4xx/5xx response, the message body containing a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.1.7.3-1. If the slice is not authorized, the NSSAAF shall use the "SLICE\_AUTH\_REJECTED" application error code.
- 3c. On redirection, the appropriate HTTP status code (e.g. "307 Temporary Redirect") shall be returned. A RedirectResponse IE may be included in the content of POST response, as specified in table 6.1.3.2.3.1-3.
4. Once receiving EAP message from the UE, the NF Service Consumer (i.e. the AMF) shall send a PUT request to the NSSAAF, targeting the resource of the slice authentication context (i.e. .../slice-authentications/{authCtxId}).

The HTTP content shall carry the slice authentication confirmation data which includes:

- UE ID (i.e. GPSI)
- S-NSSAI
- EAP Message (which is received from the UE)

5. The NSSAAF checks and confirms the slice-specific authentication and authorization. If the AAA-S is involved, the NSSAAF shall forward the EAP Message to the AAA-S to confirm the slice-specific authentication and authorization. Depending on the result, either step 6a or step 6b is performed.
- 6a. On success, "200 OK" shall be returned. The content shall contain the slice authentication confirmation response, which includes the EAP message (e.g. EAP success/failure message) generated by the NSSAAF or from the AAA-S. The NF Service Consumer (i.e. the AMF) shall forward the EAP message to the UE in NAS message.

If the UE is authenticated, the NSSAAF shall set the "authResult" attribute to "EAP\_SUCCESS". If failed to authenticate the UE, the "authResult" attribute shall be set to "EAP\_FAILURE".

If subsequent EAP message exchange is needed between the UE and the NSSAAF(AAA-S), the NSSAAF shall not include SliceAuthResult in the response message.

- 6b. On failure, one of the HTTP status codes listed in Table 6.1.7.3-1 shall be returned. For a 4xx/5xx response, the message body containing a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.1.7.3-1.
- 6c. On redirection, the appropriate HTTP status code (e.g. "307 Temporary Redirect") shall be returned. A RedirectResponse IE may be included in the content of POST response, as specified in table 6.1.3.3.3.1-3.
- 7-9. If subsequent EAP message exchange is needed between the UE and the NSSAAF to finish the EAP based authentication, step 7-9 are performed. On failure, one of the HTTP status codes listed in Table 6.1.7.3-1 shall be

returned. For a 4xx/5xx response, the message body containing a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.1.7.3-1. On redirection, the appropriate HTTP status code (e.g. "307 Temporary Redirect") shall be returned, and a RedirectResponse IE may be included in the message body, as specified in table 6.1.3.3.3.1-3.

In above steps, if the AAA-S is involved in the slice-specific authentication and authorization procedure while there is no expected response from the AAA-S in the case of time out, the NSSAAF shall return HTTP status code "504 Gateway Timeout", with the message body containing a ProblemDetails structure with the "cause" attribute set to "TIMED\_OUT\_REQUEST".

After the completion of slice-specific authentication and authorization procedure, it is up to implementation whether the NSSAAF stores the slice authentication context and related resources for a configured period, or deletes the context and resource immediately, e.g. depending on the potential need for AAA-S initiated slice-specific re-authentication/revocation notification.

If the slice-specific authentication and authorization was successful (i.e. "authResult" attribute received from NSSAAF in step 6a is set to "EAP\_SUCCESS"), the AMF shall set "status" attribute for the given slice listed in "nssaaStatusList" attribute to "EAP\_SUCCESS" (see 3GPP TS 29.518 [16]).

If the slice-specific authentication and authorization finally fails (i.e. "authResult" attribute received from NSSAAF in step 6a is set to "EAP\_FAILURE"), the AMF shall set "status" attribute for the given slice listed in "nssaaStatusList" attribute to "EAP\_FAILURE" (see 3GPP TS 29.518 [16]). In this case, if there are PDU sessions previously established corresponding to the S-NSSAIs required to be authenticated, the AMF should additionally trigger the release of those PDU sessions.

If the slice-specific authentication and authorization cannot be completed, then:

- If it is due to receiving a response with HTTP status code "504 Gateway Timeout" or due to lack of response from the NSSAAF during an NSSAA procedure, the AMF may later re-initiate slice-specific authentication and authorization procedure based on its policy. The AMF should wait for a configured period before re-initiating slice-specific authentication and authorization procedure. If the retry attempts are exhausted, the AMF stops the slice-specific authentication and authorization procedure.

NOTE 1: It is recommended to limit the number of retry attempts as described in 3GPP TS 29.500 [4].

- If it is due to the UE becoming unreachable during an NSSAA procedure, the AMF stops the slice-specific authentication and authorization procedure.
- If the AMF stops the slice-specific authentication and authorization procedure (i.e. after exhausting the retry attempts or when the UE becomes unreachable), the AMF shall keep the "status" attribute set to "PENDING", for the given slice(s) listed in "nssaaStatusList" attribute (see 3GPP TS 29.518 [16]).

NOTE 2: The AMF initiates the slice-specific authentication and authorization for S-NSSAIs in "PENDING" status at next UE uplink activity.

If an S-NSSAI subject to the NSSAA is rejected due to Network Slice Admission Control as the total number of UEs exceeds the maximum number of UEs allowed to be registered to this slice as specified in clause 5.2.2.2.2 of 3GPP TS 29.536 [17]), the AMF shall keep the "status" attribute stored as not impacted (see clause 4.2.9.1 of 3GPP TS 23.502 [3] and 3GPP TS 29.518 [16]).


### 5.2.2.3 Re-Authentication Notification

#### 5.2.2.3.1 General

The Re-Authentication Notification service operation shall be used by the NSSAAF to notify the AMF to re-initiate slice-specific authentication and authorization for a given UE, as specified in clause 4.2.9.3 of 3GPP TS 23.502 [3], and clause 16.4 of 3GPP TS 33.501 [8].

If there are two different AMFs serving the UE (e.g. the NSSAAF retrieves two different AMFs from the UDM), the NSSAAF may determine to send the re-authentication notification to both AMFs. Or, the NSSAAF may first send re-authentication notification to one of the AMF, and then send revocation notification to another AMF if EAP authentication fails in first AMF. If EAP authentication succeeds in first AMF then NSSAAF does not notify the other AMF.

Upon receiving the Network Slice-Specific Re-authentication and Re-authorization from an AAA-S, the NSSAAF shall verify whether the AAA-S is authorized to request the procedure, by checking its local configuration. If the AAA-S is authorized to request the re-authentication, the NSSAAF shall notify the NF Service Consumer (i.e. the AMF) by using the HTTP POST method as shown in Figure 5.2.2.3.1-1.

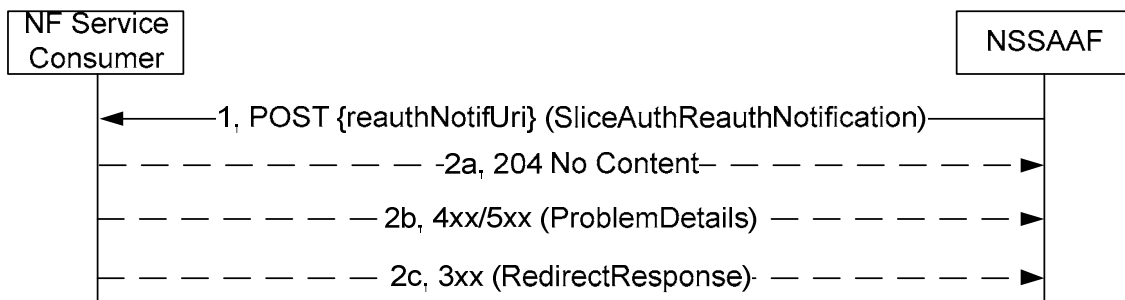

**Figure 5.2.2.3.1-1: Re-authentication Notification**

1. The NSSAAF shall send a POST request to the callback URI used to receiving re-authentication notification, which is either provided by the NF Service Consumer (i.e. the AMF), or retrieved from the AMF profile stored in the NRF (in default notification subscription for "NSSAA\_REAUTH\_NOTIFICATION" notification type). If the NF Service Consumer is located in a different PLMN (i.e. the AMF in VPLMN for a roaming UE), the NSSAAF shall use the inter-PLMN callback URI to deliver the notification if the inter-PLMN callback URI is present in the default notification subscription.

The content of the POST request shall contain the SliceAuthReauthNotification data structure, within which:

- the notificationType set to the SliceAuthNotificationType of "SLICE\_RE\_AUTH";
- the gpsi set to the GPSI of the given UE required to be re-authenticated;
- the sssai set to the S-NSSAI required to be re-authenticated;
- the supi set to the SUPI of the given UE required to be re-authenticated.

**NOTE:** The NSSAAF can obtain the SUPI of the UE in the response of a previous Nudm\_UECM\_Get used by the NSSAAF to retrieve the AMF ID.

- 2a. On success, "204 No Content" shall be returned and the content of the POST response shall be empty.

After responding the request, the NF Service Consumer (i.e. the AMF) shall send NAS message to the UE to trigger re-authentication and re-authorization for the given slice.

The AMF then decides to execute the Slice-Specific Authentication and Authorization if needed as described in clause 5.2.2.2.1.

If the S-NSSAI is not in the Mapping Of Allowed NSSAI, the AMF removes any status of the corresponding S-NSSAI subject to Slice-Specific Authentication and Authorization in the UE context it may have kept, so that an Slice-Specific Authentication and Authorization procedure is executed next time the UE requests to register with the S-NSSAI.

**NOTE:** During NSSAA re-authentication procedure for an S-NSSAI, if the S-NSSAI has to be replaced with Alternative S-NSSAI, the AMF continues with the NSSAA procedure unaffected as specified in clause 5.15.19 of 3GPP TS 23.501 [2].

- 2b. On failure, one of the HTTP status code (e.g. "404 Not Found") listed in Table 6.1.7.3-1 shall be returned.

For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.1.7.3-1.

- 2c. On redirection, the appropriate HTTP status code (e.g. "307 Temporary Redirect") shall be returned. A RedirectResponse IE may be included in the of POST response, as specified in table 6.1.5.2.3.1-2.

If the NF Service Consumer (i.e. the AMF) is not able to handle the request, but knows that another NF Service Consumer (i.e. the AMF) is able to handle it, it shall reply with an HTTP 3xx redirect response pointing to the URI of the new NF Service Consumer (i.e. the AMF).


## 5.2.2.4 Revocation Notification

### 5.2.2.4.1 General

The Revocation Notification service operation shall be used by the NSSAAF to notify the AMF to revoke slice-specific authentication and authorization result, as specified in clause 4.2.9.4 of 3GPP TS 23.502 [3], and clause 16.5 of 3GPP TS 33.501 [8], and may trigger the AMF to release the corresponding PDU sessions associated to the indicated slice.

If there are two different AMFs serving the UE (e.g. the NSSAAF retrieves two different AMFs from the UDM), the NSSAAF may determine to send revocation notification to both AMFs.

Upon receiving the Network Slice-Specific Authorization Revocation procedure from an AAA-S, the NSSAAF shall verify whether the AAA-S is authorized to request the procedure, by checking its local configuration. If the AAA-S is authorized to request the revocation, the NSSAAF shall notify the NF Service Consumer (i.e. the AMF) by using the HTTP POST method as shown in Figure 5.2.2.4.1-1.

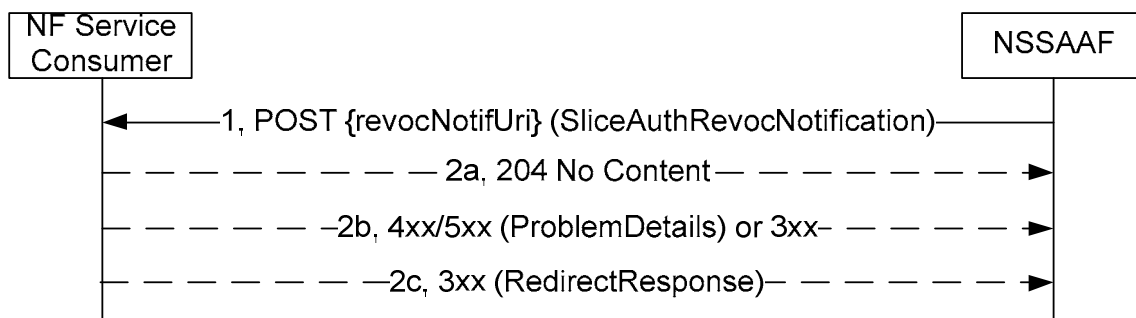

**Figure 5.2.2.4.1-1: Revocation Notification**

1. The NSSAAF shall send a POST request to the revocation notification callback URI, which is either provided by the NF Service Consumer (i.e. the AMF), or retrieved from the AMF profile stored in the NRF (in default notification subscription for "NSSAA\_REVOC\_NOTIFICATION" notification type). If the NF Service Consumer is located in a different PLMN (i.e. the AMF in VPLMN for a roaming UE), the NSSAAF shall use the inter-PLMN callback URI to deliver the notification if the inter-PLMN callback URI is present in the default notification subscription.

The content of the POST request shall contain the SliceAuthRevocNotification data structure, within which:

- the notificationType set to the SliceAuthNotificationType of "SLICE\_REVOCATION";
- the gpsi set to the GPSI of the given UE for whom the slice-specific authorization revocation is required;
- the nssai set to the S-NSSAI for which the slice-specific authorization revocation is required;
- the supi set to the SUPI of the given UE for whom the slice-specific authorization revocation is required.

NOTE: The NSSAAF can obtain the SUPI of the UE in the response of a previous Nudm\_UECM\_Get used by the NSSAAF to retrieve the AMF ID.

- 2a. On success, "204 No Content" shall be returned and the content of the POST response shall be empty.

On receiving the request, the NF Service Consumer (i.e. the AMF) shall revoke the slice-specific authentication and authorization result for the given UE. If there is PDU session associated to the given slice, the AMF shall trigger the PDU session release to the SMF, with appropriate cause value.

The AMF shall remove the "status" for the given slice in "nssaaStatusList" attribute (see 3GPP TS 29.518 [16]).

2b. On failure, one of the HTTP status code (e.g. "404 Not Found") listed in Table 6.1.7.3-1 shall be returned.

For a 4xx/5xx response, the message body shall contain a ProblemDetails structure with the "cause" attribute set to one of the application error listed in Table 6.1.7.3-1.

2c. On redirection, the appropriate HTTP status code (e.g. "307 Temporary Redirect") shall be returned. A RedirectResponse IE may be included in the content of POST response, as specified in table 6.1.5.3.3.1-2.

If the NF Service Consumer (i.e. the AMF) is not able to handle the request, but knows that another NF Service Consumer (i.e. the AMF) is able to handle it, it shall reply with an HTTP 307/308 redirect response pointing to the URI of the new NF Service Consumer (i.e. the AMF).

## 5.3 Nnssaaf\_AIW Service

### 5.3.1 Service Description

The Nnssaaf\_AIW service provides primary Authentication and Authorization service to the consumer NF (AUSF) by relaying EAP or EAP-TTLS inner method messages towards an AAA Server and performing related protocol conversion as needed. The NSSAAF is acting as NF Service Producer, while the AUSF is the NF Service Consumer.

Following functionalities are provided by the Nnssaaf\_AIW service:

- Perform primary authentication and authorization for a given UE towards an AAA Server.

The Nnssaaf\_AIW service supports the following service operations.

**Table 5.3.1-1: Service operations supported by the Nnssaaf\_AIW service**

Service Operations	Description	Operation Semantics	Example Consumer(s)
Authenticate	Perform primary authentication and authorization for a given UE towards an AAA Server.	Request/Response	AUSF

### 5.3.2 Service Operations

#### 5.3.2.1 Introduction


See Table 5.3.1-1 for an overview of the service operations supported by the Nnssaaf\_AIW service.

#### 5.3.2.2 Authenticate

##### 5.3.2.2.1 General

The Authenticate service operation permits the NF Service Consumer (i.e., the AUSF) to perform authentication and authorization for a given UE towards an AAA Server.

The NF Service Consumer (i.e., the AUSF) shall send a POST request to the resource representing authentication collection (i.e., .../authentications) to request the NSSAAF to create the corresponding resource context and perform primary authentication and authorization.

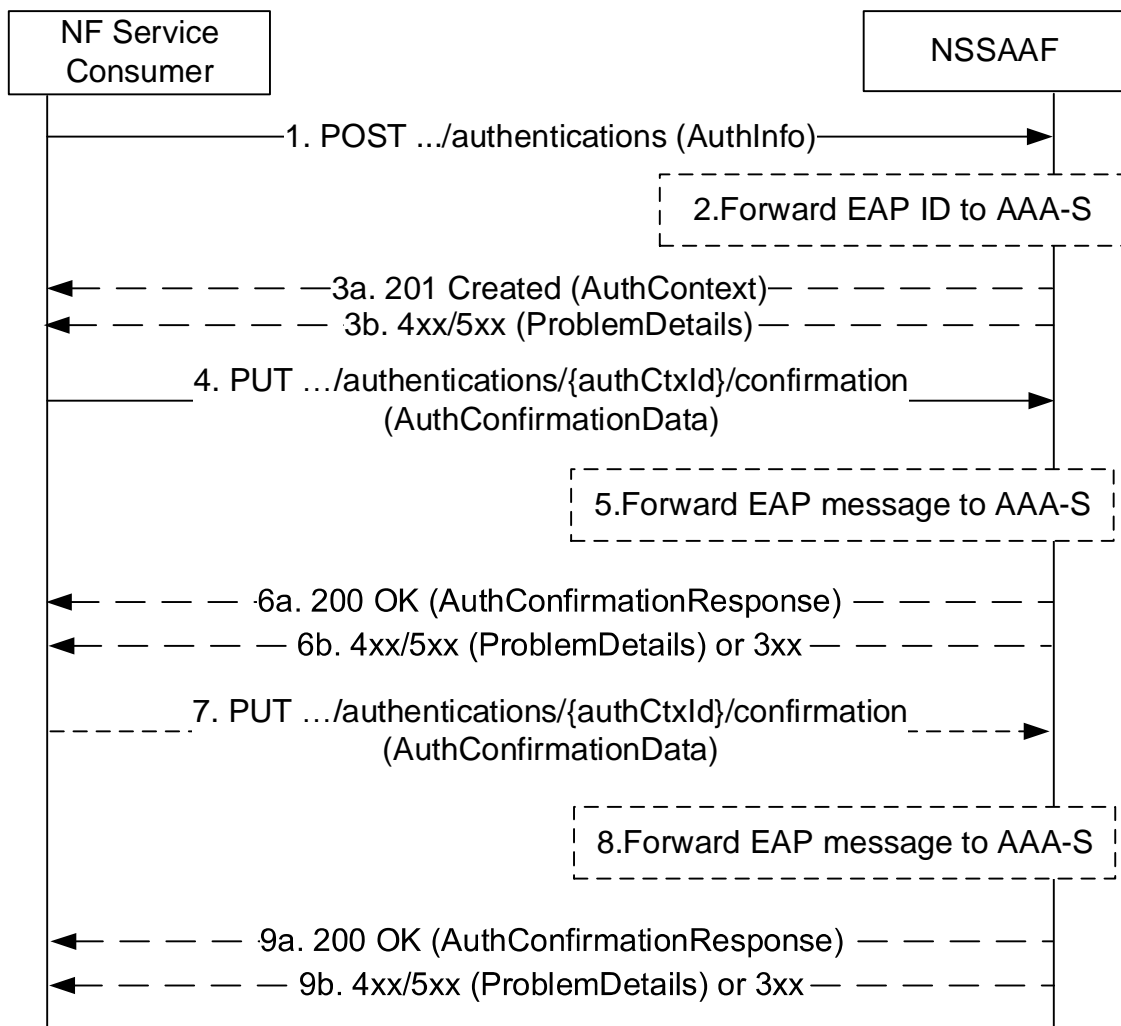

**Figure 5.3.2.2.1-1: AAA Interworking Authentication and Authorization**

1. The NF Service Consumer (AUSF) shall send a POST request (AuthInfo) to the NSSAAF, targeting the resource of authentication collection (i.e. .../authentications), to perform authentication and authorization.

The content of the request shall contain the authentication information, which may include:

- UE ID (i.e. SUPI)
- EAP-ID Response message
- EAP-TTLS Inner Method Container

2. The NSSAAF creates an authentication context for the UE and starts the authentication and authorization procedure. The NSSAAF shall send an authentication request message to the AAA-S. Depending on the result, either step 3a or step 3b is performed. The NSSAAF obtains the AAA-S address from local configuration.
- 3a. On success, "201 Created" shall be returned (AuthContext). The "Location" header shall contain the URI of the created resource (e.g. .../authentications/{authCtxId}). The content of the response shall contain the authentication context, which includes the EAP message generated by the AAA-S.
- 3b. On failure, one of the HTTP status code listed in Table 6.2.7.3-1 shall be returned with the message body containing a ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.2.7.3-1.

4. Once receiving EAP message from the UE, the NF Service Consumer (i.e., the AUSF) shall send a PUT request (AuthConfirmationData) to the NSSAAF, targeting the resource of the authentication context (i.e. `.../authentications/{authCtxId}`).

The content of the request shall carry the authentication confirmation data which includes:

- UE ID (i.e., SUPI)
- EAP Message (which is received from the UE)

5. The NSSAAF shall forward the EAP Message to the AAA-S to confirm the authentication and authorization. Depending on the result, either step 6a or step 6b is performed.

- 6a. On success, "200 OK" shall be returned (AuthConfirmationResponse). The content of the response shall contain the authentication confirmation response, which includes the EAP message (e.g., EAP success/failure message) generated by the AAA-S.

If the UE is authenticated, the NSSAAF shall set the "authResult" attribute to "EAP\_SUCCESS"; the response message shall contain the MSK received from the AAA-S and may contain the address of the SNPN UE onboarding Provisioning Servers (PVS).

If failed to authenticate the UE, the "authResult" attribute shall be set to "EAP\_FAILURE".

If subsequent EAP message exchange is needed between the UE and the NSSAAF (AAA-S), the NSSAAF shall not include AuthResult in the response message.

- 6b. On failure or redirection, one of the HTTP status codes listed in Table 6.2.7.3-1 shall be returned with the message body containing a ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.2.7.3-1.

- 7-9. If subsequent EAP message exchange is needed between the UE and the NSSAAF to finish the EAP based authentication, steps 7-9 are performed. On failure or redirection, one of the HTTP status codes listed in Table 6.2.7.3-1 shall be returned with the message body containing a ProblemDetails structure with the "cause" attribute set to one of the application errors listed in Table 6.2.7.3-1.

In above steps, if there is no expected response from the AAA-S in the case of time out, the NSSAAF shall return HTTP status code "504 Gateway Timeout", with the message body containing a ProblemDetails structure with the "cause" attribute set to "TIMED\_OUT\_REQUEST".

## 6 API Definitions

### 6.1 Nnssaaf\_NSSAA Service API

#### 6.1.1 Introduction

The Nnssaaf\_NSSAA service shall use the Nnssaaf\_NSSAA API.

The API URI of the Nnssaaf\_NSSAA API shall be:

**{apiRoot}/<apiName>/<apiVersion>**

The request URIs used in HTTP request from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

**{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>**

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].

- The <apiName> shall be "nnsaaf-nssaa".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.1.3.

## 6.1.2 Usage of HTTP

### 6.1.2.1 General

HTTP/2, IETF RFC 9113 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Nnsaaf\_NSSAA API is contained in Annex A.

### 6.1.2.2 HTTP standard headers

#### 6.1.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

#### 6.1.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 9457 [13].


### 6.1.2.3 HTTP custom headers

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [4] shall be applicable.

## 6.1.3 Resources

### 6.1.3.1 Overview

The structure of the Resource URIs of the Nnsaaf\_NSSAA service is shown in Figure 6.1.3.1-1

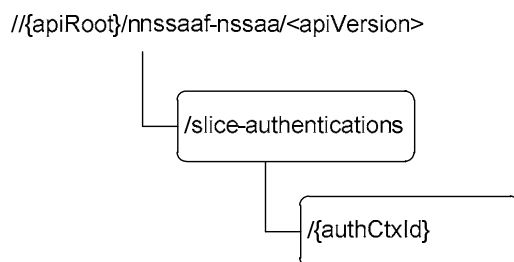

**Figure 6.1.3.1-1: Resource URI structure of the NSSAA API**

Table 6.1.3.1-1 provides an overview of the resources and applicable HTTP methods.

**Table 6.1.3.1-1: Resources and methods overview**

Resource name	Resource URI	HTTP method or custom operation	Description
slice-authentications (Collection)	/<apiVersion>/slice-authentications	POST	Initiate the slice-specific authentication and authorization process by providing inputs related to the UE and a specific slice.
slice-authentication (Document)	/<apiVersion>/slice-authentications/{authCtxId}	PUT	Put the UE response from the EAP process.

### 6.1.3.2 Resource: slice-authentications (Collection)

#### 6.1.3.2.1 Description

This resource represents a collection of the slice-authentication resources generated by the NSSAAF.

#### 6.1.3.2.2 Resource Definition

Resource URI: {apiRoot}/nssaaf-nssaa /<apiVersion>/slice-authentications

This resource shall support the resource URI variables defined in table 6.1.3.2.2-1.

**Table 6.1.3.2.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 6.1.1
apiVersion	string	See clause 6.1.1

### 6.1.3.2.3 Resource Standard Methods

#### 6.1.3.2.3.1 POST

This method shall support the URI query parameters specified in table 6.1.3.2.3.1-1.

**Table 6.1.3.2.3.1-1: URI query parameters supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.1.3.2.3.1-2 and the response data structures and response codes specified in table 6.1.3.2.3.1-3.

**Table 6.1.3.2.3.1-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
SliceAuthInfo	M	1	Contains the GPSI, S-NSSAI, and EAP ID Response from the UE, etc.

**Table 6.1.3.2.3.1-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
SliceAuthContext	M	1	201 Created	This case indicates the corresponding resource has been created by the NSSAAF for the requested slice-specific authentication and authorization, and further EAP process is required. The HTTP response shall include a "Location" header that contains the resource URI of the created resource.
RedirectResponse	<u>O</u>	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	<u>O</u>	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	400 Bad Request	This case represents the failure to start slice-specific authentication and authorization because of input parameter error.
ProblemDetails	O	0..1	403 Forbidden	This case represents when the UE or the slice is not allowed to be authenticated. The "cause" attribute may be used to indicate one of the following application errors: - SLICE_AUTH_REJECTED
ProblemDetails	O	0..1	404 Not Found	This case represents the user or user context is not found. The "cause" attribute may be used to indicate one of the following application errors: - CONTEXT_NOT_FOUND - USER_NOT_FOUND
ProblemDetails	O	0..1	504 Gateway Time out	This case represents network error or remote peer (i.e. AAA-S) error, e.g. not reachable, no response and time out. The "cause" attribute may be used to indicate one of the following application errors: - NETWORK_FAILURE - UPSTREAM_SERVER_ERROR - TIME_OUT_REQUEST
NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of 3GPP TS 29.500 [4].				

**Table 6.1.3.2.3.1-4: Headers supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description
n/a				

**Table 6.1.3.2.3.1-5: Headers supported by the 201 response code on this resource**

Name	Data type	P	Cardinality	Description
Location	URI	M	1	URI of created resource for the slice authentication context. The URI structure is defined in clause 6.1.3.3.1.

**Table 6.1.3.2.3.1-6: Headers supported by the 307 Response Code on this endpoint**

Name	Data type	P	Cardinality	Description
Location	string	M	1	URI pointing to the resource of another NF service producer to which the request should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].

**Table 6.1.3.2.3.1-7: Headers supported by the 308 Response Code on this endpoint**

Name	Data type	P	Cardinality	Description
Location	string	M	1	URI pointing to the resource of another NF service producer to which the request should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].

#### 6.1.3.2.4 Resource Custom Operations

There is no Resource Custom Operations in the current version of this API.

#### 6.1.3.3 Resource: slice-authentication (Document)

##### 6.1.3.3.1 Description

The sub-resource "slice-authentication" is generated by the NSSAAF. This subresource should not persist after the slice-specific authentication and authorization process finishes.

##### 6.1.3.3.2 Resource Definition

Resource URI: {apiRoot}/nnssaaf-nssaa/<apiVersion>/slice-authentications/{authCtxId}

This resource shall support the resource URI variables defined in table 6.1.3.3.2-1.

**Table 6.1.3.3.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 6.1.1
apiVersion	string	See clause 6.1.1
authCtxId	string	The slice authentication context ID, which is of data type SliceAuthCtxId defined in clause 6.1.6.3.2.

#### 6.1.3.3.3 Resource Standard Methods

##### 6.1.3.3.3.1 PUT

This method shall support the URI query parameters specified in table 6.1.3.3.3.1-1.

**Table 6.1.3.3.3.1-1: URI query parameters supported by the PUT method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.1.3.3.3.1-2 and the response data structures and response codes specified in table 6.1.3.3.3.1-3.

**Table 6.1.3.3.3.1-2: Data structures supported by the PUT Request Body on this resource**

Data type	P	Cardinality	Description
SliceAuthConfirmationData	M	1	Contains the EAP message generated by the UE and provided to the AMF.

**Table 6.1.3.3.3.1-3: Data structures supported by the PUT Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
SliceAuthConfirmationResponse	M	1	200 OK	This case indicates that the NSSAAF has performed the slice-specific authentication. The response body shall contain the result of the slice-specific authentication and authorization.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	400 Bad Request	This case represents a slice-specific authentication failure because of input parameter error. This indicates that the NSSAAF was not able to process the slice-specific authentication.
ProblemDetails	O	0..1	403 Forbidden	This case represents when the UE or the slice is not allowed to be authenticated. The "cause" attribute may be used to indicate one of the following application errors: - SLICE_AUTH_REJECTED
ProblemDetails	O	0..1	404 Not Found	This case represents the UE or UE related context is not found. The "cause" attribute may be used to indicate one of the following application errors: - CONTEXT_NOT_FOUND - USER_NOT_FOUND
ProblemDetails	O	0..1	504 Gateway Time out	This case represents network error or remote peer (i.e. AAA-S) error, e.g. not reachable, no response when time out. The "cause" attribute may be used to indicate one of the following application errors: - NETWORK_FAILURE - UPSTREAM_SERVER_ERROR - TIMED_OUT_REQUEST
NOTE 1: The mandatory HTTP error status code for the PUT method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of 3GPP TS 29.500 [4].				

**Table 6.1.3.3.3.1-4: Headers supported by the PUT method on this resource**

Name	Data type	P	Cardinality	Description
n/a				

**Table 6.1.3.3.3.1-5: Headers supported by the 200 response code on this resource**

Name	Data type	P	Cardinality	Description
n/a				

**Table 6.1.3.3.3.1-6: Headers supported by the 307 Response Code on this endpoint**

Name	Data type	P	Cardinality	Description
Location	string	M	1	URI pointing to the resource of another NF service producer to which the request should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].

**Table 6.1.3.3.1-7: Headers supported by the 308 Response Code on this endpoint**

Name	Data type	P	Cardinality	Description
Location	string	M	1	URI pointing to the resource of another NF service producer to which the request should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].

#### 6.1.3.3.4 Resource Custom Operations

There is no Resource Custom Operations in the current version of this API.

### 6.1.4 Custom Operations without associated resources

#### 6.1.4.1 Overview

There is no Custom Operation in the current version of this API.

### 6.1.5 Notifications

#### 6.1.5.1 General

Notifications shall comply to clause 6.2 of 3GPP TS 29.500 [4] and clause 4.6.2.3 of 3GPP TS 29.501 [5].

**Table 6.1.5.1-1: Notifications overview**

Notification	Resource URI	HTTP method or custom operation	Description (service operation)
Re-authentication Notification	{reauthNotifUri} (NF Service Consumer provided callback reference)	POST	Re-authentication Notification
Revocation Notification	{revocNotifUri} (NF Service Consumer provided callback reference)	POST	Revocation Notification

#### 6.1.5.2 Re-authentication Notification

##### 6.1.5.2.1 Description

The Re-authentication Notification is used by the NSSAAF to trigger the NF Service Consumer (i.e. the AMF) to re-initiate slice-specific authentication and authorization for a given UE.

##### 6.1.5.2.2 Target URI

The Notification URI "{reauthNotifUri}" shall be used with the resource URI variables defined in table 6.1.5.2.2-1.

**Table 6.1.5.2.2-1: Resource URI variables for this resource**

Name	Definition
reauthNotifUri	String formatted as URI which carries the re-authentication notification URI.

## 6.1.5.2.3 Standard Methods

## 6.1.5.2.3.1 POST

This method shall support the request data structures specified in table 6.1.5.2.3.1-1 and the response data structures and response codes specified in table 6.1.5.2.3.1-2.

**Table 6.1.5.2.3.1-1: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
SliceAuthReauthNotification	M	1	SliceAuthReauthNotification which carries the re-authentication notification for a given UE.

**Table 6.1.5.2.3.1-2: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful notification of the re-authentication.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of 3GPP TS 29.500 [4].				

**Table 6.1.5.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of NF service consumer to which the notification should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].

**Table 6.1.5.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of NF service consumer to which the notification should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].

## 6.1.5.3 Revocation Notification

## 6.1.5.3.1 Description

The Revocation Notification is used by the NSSAAF to trigger the NF Service Consumer (i.e. the AMF) to revoke the slice-specific authentication and authorization result for a given UE.

## 6.1.5.3.2 Target URI

The Notification URI "{revocNotifUri}" shall be used with the resource URI variables defined in table 6.1.5.3.2-1.

**Table 6.1.5.3.2-1: Resource URI variables for this resource**

Name	Definition
revocNotifUri	String formatted as URI which carries the revocation notification URI.

### 6.1.5.3.3 Standard Methods

#### 6.1.5.3.3.1 POST

This method shall support the request data structures specified in table 6.1.5.3.3.1-1 and the response data structures and response codes specified in table 6.1.5.3.3.1-2.

**Table 6.1.5.3.3.1-1: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
SliceAuthRevocNotification	M	1	SliceAuthRevocNotification which carries the revocation notification for a given UE.

**Table 6.1.5.3.3.1-2: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful notification of the revocation.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
NOTE 1: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of 3GPP TS 29.500 [4].				

**Table 6.1.5.3.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of NF service consumer to which the notification should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].

**Table 6.1.5.3.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	A URI pointing to the endpoint of NF service consumer to which the notification should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].

## 6.1.6 Data Model

### 6.1.6.1 General

This clause specifies the application data model supported by the API.

Table 6.1.6.1-1 specifies the data types defined for the Nnssaaf service based interface protocol.

**Table 6.1.6.1-1: Nnssaaf specific Data Types**

Data type	Clause defined	Description	Applicability
SliceAuthInfo	6.1.6.2.2	Contains the GPSI, S-NSSAI, EAP ID Response, etc.	
SliceAuthContext	6.1.6.2.3	Contains the information of the resource created for slice-specific authentication and authorization.	
SliceAuthConfirmationData	6.1.6.2.4	Contains the EAP message from the UE for EAP process.	
SliceAuthConfirmationResponse	6.1.6.2.5	Contains the slice-specific authentication and authorization result from the NSSAAF to the UE.	
SliceAuthReauthNotification	6.1.6.2.6	Contains the re-authentication notification for slice-specific authentication and authorization.	
SliceAuthRevocNotification	6.1.6.2.7	Contains the revocation notification for slice-specific authentication and authorization.	
SliceAuthCxtId	6.1.6.3.2	Contains the resource ID of slice authentication context.	
EapMessage	6.1.6.3.2	Contains the string formatted EAP message.	
SliceAuthNotificationType	6.1.6.3.3	Notification type of slice-specification authentication and authorization.	

Table 6.1.6.1-2 specifies data types re-used by the Nnssaaf service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Nnssaaf service based interface.

**Table 6.1.6.1-2: Nnssaaf re-used Data Types**

Data type	Reference	Comments	Applicability
ProblemDetails	3GPP TS 29.571 [16]	Common Data Type used in response bodies	
RedirectResponse	3GPP TS 29.571 [16]	Redirect Response	
Gpsi	3GPP TS 29.571 [16]	GPSI	
Snssai	3GPP TS 29.571 [16]	S-NSSAI	
AuthStatus	3GPP TS 29.571 [16]	Slice Authentication Status	
Supi	3GPP TS 29.571 [16]	SUPI of the UE	

## 6.1.6.2 Structured data types

The following clause defines the structures to be used in resource representations.

### 6.1.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

## 6.1.6.2.2 Type: SliceAuthInfo

Table 6.1.6.2.2-1: Definition of type SliceAuthInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
gpsi	Gpsi	M	1	Contains the GPSI of the UE.	
snssai	Snssai	M	1	Contains the S-NSSAI for authentication.	
eapIdRsp	EapMessage	M	1	Contains the EAP ID Responses message from the UE. If no EAP ID Responses message is received or requested, it shall contain the Null value.	
amfInstancelId	NfInstancelId	O	0..1	This IE may be present, if the AMF determines to provide the re-authentication/revocation notification URI to the NSSAAF. When present, it shall contain the NF Instance Id of the AMF.	
reauthNotifUri	Uri	O	0..1	This IE may be present, e.g. if the AMF determines the UE with low mobility characteristic. When present, it shall contain the re-authentication notification URI.	
revocNotifUri	Uri	O	0..1	This IE may be present, e.g. if the AMF determines the UE with low mobility characteristic. When present, it shall contain the revocation notification URI.	

## 6.1.6.2.3 Type: SliceAuthContext

Table 6.1.6.2.3-1: Definition of type SliceAuthContext

Attribute name	Data type	P	Cardinality	Description	Applicability
gpsi	Gpsi	M	1	Contains the GPSI of the UE.	
snssai	Snssai	M	1	Contains the S-NSSAI for authentication.	
authCtxId	SliceAuthCtxId	M	1	Indicates the resource ID uniquely identifying the slice authentication context, generated by the NSSAAF.	
eapMessage	EapMessage	M	1	Contains the EAP message to be sent to the UE.	

## 6.1.6.2.4 Type: SliceAuthConfirmationData

Table 6.1.6.2.4-1: Definition of type SliceAuthConfirmationData

Attribute name	Data type	P	Cardinality	Description	Applicability
gpsi	Gpsi	M	1	Contains the GPSI of the UE.	
snssai	Snssai	M	1	Contains the S-NSSAI for authentication.	
eapMessage	EapMessage	M	1	Contains the EAP message received from the UE.	

## 6.1.6.2.5 Type: SliceAuthConfirmationResponse

**Table 6.1.6.2.5-1: Definition of type SliceAuthConfirmationResponse**

Attribute name	Data type	P	Cardinality	Description	Applicability
gpsi	Gpsi	M	1	Contains the GPSI of the UE.	
snssai	Snssai	M	1	Contains the S-NSSAI for authentication.	
eapMessage	EapMessage	M	1	Contains the EAP success/failure message needs to be sent to the UE.	
authResult	AuthStatus	O	0..1	When present, it shall indicate the result of slice-specific authentication and authorization.	

## 6.1.6.2.6 Type: SliceAuthReauthNotification

**Table 6.1.6.2.6-1: Definition of type SliceAuthReauthNotification**

Attribute name	Data type	P	Cardinality	Description	Applicability
notifType	SliceAuthNotificationType	M	1	Indicate the type of slice authentication notification.	
gpsi	Gpsi	M	1	Contains the GPSI of the UE.	
snssai	Snssai	M	1	Contains the S-NSSAI for authentication.	
supi	Supi	C	0..1	This IE should be sent by the NSSAAF to the AMF, if available.	

## 6.1.6.2.7 Type: SliceAuthRevocNotification

**Table 6.1.6.2.7-1: Definition of type SliceAuthRevocNotification**

Attribute name	Data type	P	Cardinality	Description	Applicability
notifType	SliceAuthNotificationType	M	1	Indicate the type of slice authentication notification.	
gpsi	Gpsi	M	1	Contains the GPSI of the UE.	
snssai	Snssai	M	1	Contains the S-NSSAI for authentication.	
supi	Supi	C	0..1	This IE should be sent by the NSSAAF to the AMF, if available.	

## 6.1.6.3 Simple data types and enumerations

## 6.1.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

## 6.1.6.3.2 Simple data types

The simple data types defined in table 6.1.6.3.2-1 shall be supported.

**Table 6.1.6.3.2-1: Simple data types**

Type Name	Type Definition	Description	Applicability
SliceAuthCtxId	string	The resource ID uniquely identifying the slice authentication context, generated by the NSSAAF.	
EapMessage	string	The EAP packet is encoded using base64 (see IETF RFC 4648 [14]) and represented as a String. Format: byte	

### 6.1.6.3.3 Enumeration: SliceAuthNotificationType

The enumeration SliceAuthNotificationType represents the notification type of slice-specific authentication and authorization. It shall comply with the provisions defined in table 6.1.6.3.3-1.

**Table 6.1.6.3.3-1: Enumeration SliceAuthNotificationType**

Enumeration value	Description	Applicability
SLICE_RE_AUTH	This value is used to indicate the re-authentication is needed	
SLICE_REVOCAATION	This value is used to indicate the previous slice-specific authentication and authorization shall be revoked.	

### 6.1.6.4 Data types describing alternative data types or combinations of data types

There is no alternative data types defined in this specification.

### 6.1.6.5 Binary data

There is no binary data type defined in this specification.

## 6.1.7 Error Handling

### 6.1.7.1 General

For the Nnssaaf\_NSSAA API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Nnssaaf\_NSSAA API.

### 6.1.7.2 Protocol Errors

No specific procedures for the Nnssaaf\_NSSAA service are specified.

### 6.1.7.3 Application Errors

The application errors defined for the Nnssaaf\_NSSAA service are listed in Table 6.1.7.3-1.

**Table 6.1.7.3-1: Application errors**

Application Error	HTTP status code	Description
RESOURCE_TEMP_MOVED	307 Temporary Redirect	Indicates that the NSSAAF is not able to handle the request, but points to the URI of another NSSAAF.
RESOURCE_MOVED	308 Permanent Redirect	Indicates that the NSSAAF is not able to handle the request, but points to the URI of another NSSAAF.
SLICE_AUTH_REJECTED	403 Forbidden	The user cannot be authenticated, e.g. authentication request rejected by the AAA-S.
CONTEXT_NOT_FOUND	404 Not Found	The NSSAAF cannot find the resource corresponding to the URI provided by the NF Service Consumer, i.e. the resource identified by the authCtxId does not exist in the NSSAAF.
USER_NOT_FOUND	404 Not Found	The user does not exist in the HPLMN.
UPSTREAM_SERVER_ERROR	504 Gateway Timeout	Error happens in reaching the remote peer (i.e. the AAA-S).
NETWORK_FAILURE	504 Gateway Timeout	The request is rejected due to a network problem.
TIMED_OUT_REQUEST	504 Gateway Timeout	No response is received from the remote peer (i.e. the AAA-S) when time out.

## 6.1.8 Feature negotiation

The optional features in table 6.1.8-1 are defined for the Nnssaaf\_NSSAA API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

**Table 6.1.8-1: Supported Features**

Feature number	Feature Name	Description

## 6.1.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Nnssaaf\_NSSAA API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Nnssaaf\_NSSAA API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

**NOTE:** When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Nnssaaf\_NSSAA service.

The Nnssaaf\_NSSAA API defines a single scope "nnssaaf-nssaa" for the entire service, and it does not define any additional scopes at resource or operation level.

### 6.1.10 HTTP redirection

An HTTP request may be redirected to a different NSSAAF service instance when using direct or indirect communications (see 3GPP TS 29.500 [4]).

An SCP that reselects a different NSSAAF producer instance will return the NF Instance ID of the new NSSAAF producer instance in the 3gpp-Sbi-Producer-Id header, as specified in clause 6.10.3.4 of 3GPP TS 29.500 [4].

If an NSSAAF redirects a service request to a different NSSAAF using an 307 Temporary Redirect or 308 Permanent Redirect status code, the identity of the new NSSAAF towards which the service request is redirected shall be indicated in the 3gpp-Sbi-Target-Nf-Id header of the 307 Temporary Redirect or 308 Permanent Redirect response as specified in clause 6.10.9.1 of 3GPP TS 29.500 [4].

## 6.2 Nnssaaf\_AIW Service API

### 6.2.1 Introduction

The Nnssaaf\_AIW service shall use the Nnssaaf\_AIW API.

The API URI of the Nnssaaf\_AIW API shall be:

**{apiRoot}/<apiName>/<apiVersion>**

The request URIs used in HTTP request from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

**{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>**

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].

- The <apiName> shall be "nnsaaf-aiw".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.2.3.

## 6.2.2 Usage of HTTP

### 6.2.2.1 General

HTTP/2, IETF RFC 9113 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Nnsaaf\_AIW API is contained in Annex A.

### 6.2.2.2 HTTP standard headers

#### 6.2.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

#### 6.2.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 9457 [13].


### 6.2.2.3 HTTP custom headers

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [4] shall be applicable.

## 6.2.3 Resources

### 6.2.3.1 Overview

The structure of the Resource URIs of the Nnsaaf\_AIW service is shown in Figure 6.2.3.1-1

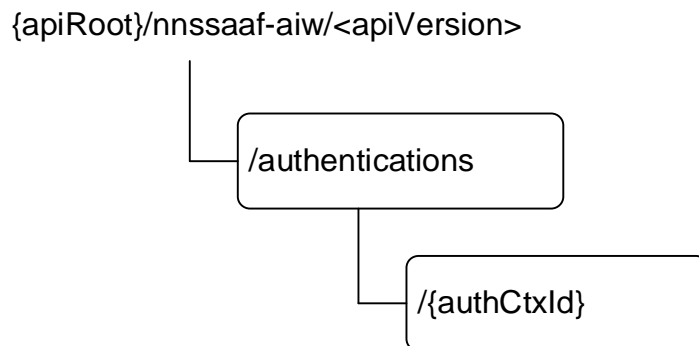

**Figure 6.2.3.1-1: Resource URI structure of the AIW API**

Table 6.2.3.1-1 provides an overview of the resources and applicable HTTP methods.

**Table 6.2.3.1-1: Resources and methods overview**

Resource name	Resource URI	HTTP method or custom operation	Description
authentications (Collection)	/authentications	POST	Initiate the authentication and authorization process by providing inputs related to the UE.
authentication (Document)	/authentications/{authCtxId}	PUT	Put the UE response from the EAP process.

### 6.2.3.2 Resource: authentications (Collection)

#### 6.2.3.2.1 Description

This resource represents a collection of the authentication resources generated by the NSSAAF.

#### 6.2.3.2.2 Resource Definition

Resource URI: **{apiRoot}/nnsaaf-aiw/<apiVersion>/authentications**

This resource shall support the resource URI variables defined in table 6.2.3.2.2-1.

**Table 6.2.3.2.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 6.2.1
apiVersion	string	See clause 6.2.1

#### 6.2.3.2.3 Resource Standard Methods

##### 6.2.3.2.3.1 POST

This method shall support the URI query parameters specified in table 6.2.3.2.3.1-1.

**Table 6.2.3.2.3.1-1: URI query parameters supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.2.3.1-2 and the response data structures and response codes specified in table 6.2.3.2.3.1-3.

**Table 6.2.3.2.3.1-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
AuthInfo	M	1	Contains the SUPI, EAP ID Response from the UE, etc.

**Table 6.2.3.2.3.1-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
AuthContext	M	1	201 Created	This case indicates the corresponding resource has been created by the NSSAAF for the requested authentication and authorization, and further EAP process is required. The HTTP response shall include a "Location" header that contains the resource URI of the created resource.
RedirectResponse	<u>O</u>	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	<u>O</u>	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	400 Bad Request	This case represents the failure to start authentication and authorization because of input parameter error.
ProblemDetails	O	0..1	403 Forbidden	This case represents when the UE is not allowed to be authenticated.
ProblemDetails	O	0..1	404 Not Found	This case represents the user or user context is not found. The "cause" attribute may be used to indicate one of the following application errors: - CONTEXT_NOT_FOUND - USER_NOT_FOUND
ProblemDetails	O	0..1	504 Gateway Time out	This case represents network error or remote peer (i.e. AAA-S) error, e.g. not reachable, no response and time out. The "cause" attribute may be used to indicate one of the following application errors: - NETWORK_FAILURE - UPSTREAM_SERVER_ERROR - TIME_OUT_REQUEST

NOTE 1: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.

NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of 3GPP TS 29.500 [4].

**Table 6.2.3.2.3.1-4: Headers supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description
n/a				

**Table 6.2.3.2.3.1-5: Headers supported by the 201 response code on this resource**

Name	Data type	P	Cardinality	Description
Location	URI	M	1	URI of created resource for the authentication context. The URI structure is defined in clause 6.2.3.3.1.

**Table 6.2.3.2.3.1-6: Headers supported by the 307 Response Code on this endpoint**

Name	Data type	P	Cardinality	Description
Location	string	M	1	URI pointing to the resource of another NF service producer to which the request should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].

**Table 6.2.3.2.3.1-7: Headers supported by the 308 Response Code on this endpoint**

Name	Data type	P	Cardinality	Description
Location	string	M	1	URI pointing to the resource of another NF service producer to which the request should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].

### 6.2.3.3 Resource: authentication (Document)

#### 6.2.3.3.1 Description

The sub-resource "authentication" is generated by the NSSAAF. This subresource should not persist after the authentication and authorization process finishes.

#### 6.2.3.3.2 Resource Definition

Resource URI: {apiRoot}/nmssaaf-aiw/<apiVersion>/authentications/{authCtxId}

This resource shall support the resource URI variables defined in table 6.2.3.3.2-1.

**Table 6.2.3.3.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 6.2.1
apiVersion	string	See clause 6.2.1
authCtxId	string	The authentication context ID, which is of data type AuthCtxId defined in clause 6.2.6.3.2.

#### 6.2.3.3.3 Resource Standard Methods

##### 6.2.3.3.3.1 PUT

This method shall support the URI query parameters specified in table 6.2.3.3.3.1-1.

**Table 6.2.3.3.3.1-1: URI query parameters supported by the PUT method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.3.3.1-2 and the response data structures and response codes specified in table 6.2.3.3.3.1-3.

**Table 6.2.3.3.3.1-2: Data structures supported by the PUT Request Body on this resource**

Data type	P	Cardinality	Description
AuthConfirmation Data	M	1	Contains the EAP message generated by the UE and provided to the AUSF.

**Table 6.2.3.3.3.1-3: Data structures supported by the PUT Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
AuthConfirmationResponse	M	1	200 OK	This case indicates that the NSSAAF has performed the authentication. The response body shall contain the result of the authentication and authorization.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. (NOTE 2)
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. (NOTE 2)
ProblemDetails	O	0..1	400 Bad Request	This case represents an authentication failure because of input parameter error. This indicates that the NSSAAF was not able to process the authentication.
ProblemDetails	O	0..1	403 Forbidden	This case represents when the UE is not allowed to be authenticated.
ProblemDetails	O	0..1	404 Not Found	This case represents the UE or UE related context is not found. The "cause" attribute may be used to indicate one of the following application errors: - CONTEXT_NOT_FOUND - USER_NOT_FOUND
ProblemDetails	O	0..1	504 Gateway Time out	This case represents network error or remote peer (i.e. AAA-S) error, e.g. not reachable, no response when time out. The "cause" attribute may be used to indicate one of the following application errors: - NETWORK_FAILURE - UPSTREAM_SERVER_ERROR - TIMED_OUT_REQUEST
NOTE 1: The mandatory HTTP error status code for the PUT method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				
NOTE 2: RedirectResponse may be inserted by an SCP, see clause 6.10.9.1 of 3GPP TS 29.500 [4].				

**Table 6.2.3.3.3.1-4: Headers supported by the PUT method on this resource**

Name	Data type	P	Cardinality	Description
n/a				

**Table 6.2.3.3.3.1-5: Headers supported by the 200 response code on this resource**

Name	Data type	P	Cardinality	Description
n/a				

**Table 6.2.3.3.3.1-6: Headers supported by the 307 Response Code on this endpoint**

Name	Data type	P	Cardinality	Description
Location	string	M	1	URI pointing to the resource of another NF service producer to which the request should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].

**Table 6.2.3.3.1-7: Headers supported by the 308 Response Code on this endpoint**

Name	Data type	P	Cardinality	Description
Location	string	M	1	URI pointing to the resource of another NF service producer to which the request should be sent. For the case, when a request is redirected to the same target resource via a different SCP, see clause 6.10.9.1 in 3GPP TS 29.500 [4].

## 6.2.4 Custom Operations without associated resources

There are no Custom Operation in the current version of this API.

## 6.2.5 Notifications

There are no Notifications in the current version of this API.

## 6.2.6 Data Model

### 6.2.6.1 General

This clause specifies the application data model supported by the API.

Table 6.2.6.1-1 specifies the data types defined for the Nnssaaf service based interface protocol.

**Table 6.2.6.1-1: Nnssaaf\_AIW specific Data Types**

Data type	Clause defined	Description	Applicability
AuthInfo	6.2.6.2.2	Contains the SUPI, EAP ID Response, etc.	
AuthContext	6.2.6.2.3	Contains the information of the resource created for authentication and authorization.	
AuthConfirmationData	6.2.6.2.4	Contains the EAP message from the UE for EAP process.	
AuthConfirmationResponse	6.2.6.2.5	Contains the authentication and authorization result from the NSSAAF to the UE.	
AuthCtxId	6.2.6.3.2	Contains the resource ID of authentication context.	

Table 6.2.6.1-2 specifies data types re-used by the Nnssaaf\_AIW service based interface from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Nnssaaf\_AIW service based interface.

**Table 6.2.6.1-2: Nnssaaf re-used Data Types**

Data type	Reference	Comments	Applicability
ProblemDetails	3GPP TS 29.571 [16]	Common Data Type used in response bodies	
RedirectResponse	3GPP TS 29.571 [16]	Redirect Response	
AuthStatus	3GPP TS 29.571 [16]	Authentication Status	
Supi	3GPP TS 29.571 [16]	SUPI of the UE	
SupportedFeatures	3GPP TS 29.571 [16]	Supported Features	
ServerAddressingInfo	3GPP TS 29.571 [16]	Addressing information (FQNDs and/or IP addresses) of a server.	
EapMessage	3GPP TS 29.526	See clause 6.1.6.3.2	
Msk	3GPP TS 29.509 [18]		

## 6.2.6.2 Structured data types

### 6.2.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

#### 6.2.6.2.2 Type: AuthInfo

**Table 6.2.6.2.2-1: Definition of type AuthInfo**

Attribute name	Data type	P	Cardinality	Description	Applicability
supi	Supi	M	1	Contains the SUPI of the UE.	
eapIdRsp	EapMessage	C	0..1	Contains the EAP Identity Response message. (NOTE)	
ttlsInnerMethodContainer	EapMessage	C	0..1	Contains the EAP-TTLS inner method messages. It is included when EAP-TTLS is used, after the initial EAP-TLS exchange. (NOTE)	
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one optional feature defined in clause 6.2.9 is supported.	

NOTE: Either eapIdRsp or ttlsInnerMethodContainer shall be present, but not both.

#### 6.2.6.2.3 Type: AuthContext

**Table 6.2.6.2.3-1: Definition of type AuthContext**

Attribute name	Data type	P	Cardinality	Description	Applicability
supi	Supi	M	1	Contains the SUPI of the UE.	
authCtxId	AuthCtxId	M	1	Indicates the resource ID uniquely identifying the authentication context, generated by the NSSAAF.	
eapMessage	EapMessage	C	0..1	Contains the EAP message to be sent to the UE. (NOTE)	
ttlsInnerMethodContainer	EapMessage	C	0..1	Contains the EAP-TTLS inner method messages. It is included when EAP-TTLS is used, after the initial EAP exchange. (NOTE)	
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one optional feature defined in clause 6.2.9 is supported.	

NOTE: Either eapIdRsp or ttlsInnerMethodContainer shall be present, but not both.

#### 6.2.6.2.4 Type: AuthConfirmationData

**Table 6.2.6.2.4-1: Definition of type AuthConfirmationData**

Attribute name	Data type	P	Cardinality	Description	Applicability
supi	Supi	M	1	Contains the SUPI of the UE.	
eapMessage	EapMessage	M	1	Contains the EAP message received from the UE.	
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one optional feature defined in clause 6.2.9 is supported.	

## 6.2.6.2.5 Type: AuthConfirmationResponse

**Table 6.2.6.2.5-1: Definition of type AuthConfirmationResponse**

Attribute name	Data type	P	Cardinality	Description	Applicability
supi	Supi	M	1	Contains the SUPI of the UE.	
eapMessage	EapMessage	M	1	Contains the EAP success/failure message needs to be sent to the UE.	
authResult	AuthStatus	O	0..1	When present, it shall indicate the result of authentication and authorization.	
pvsInfo	array(ServerAddressingInfo)	O	1..N	When present, it shall contain the FQDN(s) and/or IP address(es) of the SNPN UE onboarding Provisioning Servers.	
msk	Msk	C	0..1	This IE shall be present if MSK is received from AAA-S after successful authentication, as specified in clause I.2.2.2 of 3GPP TS 33.501 [8].	
supportedFeatures	SupportedFeatures	C	0..1	This IE shall be present if at least one optional feature defined in clause 6.2.9 is supported.	

## 6.2.6.3 Simple data types and enumerations

## 6.2.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

## 6.2.6.3.2 Simple data types

The simple data types defined in table 6.2.6.3.2-1 shall be supported.

**Table 6.2.6.3.2-1: Simple data types**

Type Name	Type Definition	Description	Applicability
AuthCtxId	string	The resource ID uniquely identifying the authentication context, generated by the NSSAAF.	

## 6.2.7 Error Handling

## 6.2.7.1 General

For the Nnssaaf\_AIW API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Nnssaaf\_AIW API.

## 6.2.7.2 Protocol Errors

No specific procedures for the Nnssaaf\_AIW service are specified.

## 6.2.7.3 Application Errors

The application errors defined for the Nnssaaf\_AIW service are listed in Table 6.2.7.3-1.

**Table 6.2.7.3-1: Application errors**

Application Error	HTTP status code	Description
RESOURCE_TEMP_MOVED	307 Temporary Redirect	Indicates that the NSSAAF is not able to handle the request, but points to the URI of another NSSAAF.
RESOURCE_MOVED	308 Permanent Redirect	Indicates that the NSSAAF is not able to handle the request, but points to the URI of another NSSAAF.
CONTEXT_NOT_FOUND	404 Not Found	The NSSAAF cannot find the resource corresponding to the URI provided by the NF Service Consumer, i.e. the resource identified by the authCtxId does not exist in the NSSAAF.
USER_NOT_FOUND	404 Not Found	The user does not exist.
UPSTREAM_SERVER_ERROR	504 Gateway Timeout	Error happens in reaching the remote peer (i.e., the AAA-S).
NETWORK_FAILURE	504 Gateway Timeout	The request is rejected due to a network problem.
TIMED_OUT_REQUEST	504 Gateway Timeout	No response is received from the remote peer (i.e., the AAA-S) when time out.

## 6.2.8 Feature negotiation

The optional features in table 6.2.8-1 are defined for the Nnssaaf\_AIW API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

**Table 6.2.8-1: Supported Features**

Feature number	Feature Name	Description

## 6.2.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Nnssaaf\_AIW API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Nnssaaf\_AIW API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

**NOTE:** When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Nnssaaf\_AIW service.

The Nnssaaf\_AIW API defines a single scope "nssaaf-aiw" for the entire service, and it does not define any additional scopes at resource or operation level.

## 6.2.10 HTTP redirection

An HTTP request may be redirected to a different NSSAAF service instance when using direct or indirect communications (see 3GPP TS 29.500 [4]).

An SCP that reselects a different NSSAAF producer instance will return the NF Instance ID of the new NSSAAF producer instance in the 3gpp-Sbi-Producer-Id header, as specified in clause 6.10.3.4 of 3GPP TS 29.500 [4].

If an NSSAAF redirects a service request to a different NSSAAF using an 307 Temporary Redirect or 308 Permanent Redirect status code, the identity of the new NSSAAF towards which the service request is redirected shall be indicated in the 3gpp-Sbi-Target-Nf-Id header of the 307 Temporary Redirect or 308 Permanent Redirect response as specified in clause 6.10.9.1 of 3GPP TS 29.500 [4].

---

# Annex A (normative): OpenAPI specification

## A.1 General

This Annex specifies the formal definition of the API(s) defined in the present specification. It consists of OpenAPI 3.0.0 specifications in YAML format.

This Annex takes precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

NOTE : The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository hosted, that uses the GitLab software version control system (see 3GPP TS 29.501 [5] clause 5.3.1 and 3GPP TR 21.900 [7] clause 5B).

---

## A.2 Nnssaaf\_NSSAA API

```
openapi: 3.0.0
```

```
info:
```

```
  title: Nnssaaf_NSSAA
  version: 1.3.0-alpha.3
  description: |
    Network Slice-Specific Authentication and Authorization Service.
    © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
```

```
externalDocs:
```

```
  description: 3GPP TS29.526, NSSAA Service, version 19.2.0.
  url: https://www.3gpp.org/ftp/Specs/archive/29_series/29.526/
```

```
servers:
```

```
  - url: '{apiRoot}/nnssaaf-nssaa/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501
```

```
security:
```

```
  - {}
  - oAuth2ClientCredentials:
    - nnssaaf-nssaa
```

```
paths:
```

```
  /slice-authentications:
    post:
      summary: Create slice authentication context
      operationId: CreateSliceAuthenticationContext
      tags:
        - Slice Authentication Context Creation
      requestBody:
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/SliceAuthInfo'
            required: true
      responses:
        '201':
          description: SliceAuthContext
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/SliceAuthContext'
```

```

headers:
  Location:
    description: 'Contains the URI of the newly created resource according to the
structure: {apiRoot}/nssaa/nssaa/<apiVersion>/slice-authentications/{authCtxId}'
    required: true
    schema:
      type: string
'307':
  $ref: 'TS29571_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29571_CommonData.yaml#/components/responses/308'
'400':
  description: Bad Request from the AMF
  content:
    application/problem+json:
      schema:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  description: Forbidden due to slice authentication rejected
  content:
    application/problem+json:
      schema:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
'404':
  description: User does not exist
  content:
    application/problem+json:
      schema:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'502':
  $ref: 'TS29571_CommonData.yaml#/components/responses/502'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
'504':
  description: Network error or remote peer error
  content:
    application/problem+json:
      schema:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
callbacks:
  reauthenticationNotification:
    '{$request.body#/reauthNotifUri}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/SliceAuthReauthNotification'
  responses:
    '204':
      description: slice re-authentication notification response
    '307':
      description: Temporary Redirect
      content:
        application/json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/RedirectResponse'
  headers:
    Location:
      description: 'The URI pointing to the resource located on the redirect target'
      required: true
      schema:
        type: string
'308':
  description: Permanent Redirect

```

```

    content:
      application/json:
        schema:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/RedirectResponse'
    headers:
      Location:
        description: 'The URI pointing to the resource located on the redirect target'
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '502':
    $ref: 'TS29571_CommonData.yaml#/components/responses/502'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    description: Unexpected error
  revocationNotification:
    '{$request.body#/revocNotifUri}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/SliceAuthRevocNotification'
  responses:
    '204':
      description: slice revocation notification response
    '307':
      description: Temporary Redirect
      content:
        application/json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/RedirectResponse'
      headers:
        Location:
          description: 'The URI pointing to the resource located on the redirect target'
          required: true
          schema:
            type: string
    '308':
      description: Permanent Redirect
      content:
        application/json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/RedirectResponse'
      headers:
        Location:
          description: 'The URI pointing to the resource located on the redirect target'
          required: true
          schema:
            type: string
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'

```

```

    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '502':
      $ref: 'TS29571_CommonData.yaml#/components/responses/502'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    description: Unexpected error

/slice-authentications/{authCtxId}:
  put:
    summary: Confirm the slice authentication result
    operationId: ConfirmSliceAuthentication
    tags:
      - Confirm Slice Authentication
    parameters:
      - name: authCtxId
        in: path
        required: true
        schema:
          type: string
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/SliceAuthConfirmationData'
    responses:
      '200':
        description: Request processed (EAP success or Failure)
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/SliceAuthConfirmationResponse'
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        description: Bad Request
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        description: Internal Server Error
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      '504':
        description: Network error or remote peer error
        content:

```

```

    application/problem+json:
      schema:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            nnsaaf-nssaa: Access to the nnsaaf-nssaa API
schemas:
  #
  # COMPLEX TYPES:
  #
  SliceAuthInfo:
    description: >
      This data type contains the GPSI, S-NSSAI, EAP response ID from the UE.
    type: object
    properties:
      gpsi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      snssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      eapIdRsp:
        $ref: '#/components/schemas/EapMessage'
      amfInstanceId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/NfInstanceId'
      reauthNotifUri:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      revocNotifUri:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    required:
      - gpsi
      - snssai
      - eapIdRsp
  SliceAuthContext:
    description: >
      This data type includes information of the resource created for slice-specific
      authentication and authorization.
    type: object
    properties:
      gpsi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      snssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      authCtxId:
        $ref: '#/components/schemas/SliceAuthCtxId'
      eapMessage:
        $ref: '#/components/schemas/EapMessage'
    required:
      - gpsi
      - snssai
      - authCtxId
      - eapMessage
  SliceAuthConfirmationData:
    description: >
      This data type contains the EAP message generated by the UE and it is
      provided to an AMF.
    type: object
    properties:
      gpsi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
      snssai:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      eapMessage:
        $ref: '#/components/schemas/EapMessage'
    required:
      - gpsi
      - snssai
      - eapMessage

```

```
SliceAuthConfirmationResponse:
  description: >
    This data type includes information about the result of slice-specific
    authentication and authorization from the NSSAAF to the UE.
  type: object
  properties:
    gpsi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
    snssai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
    eapMessage:
      $ref: '#/components/schemas/EapMessage'
    authResult:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/AuthStatus'
  required:
    - gpsi
    - snssai
    - eapMessage

SliceAuthReauthNotification:
  description: >
    This data type includes information about the re-authentication notification for
    authentication and authorization.
  type: object
  properties:
    notifType:
      $ref: '#/components/schemas/SliceAuthNotificationType'
    gpsi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
    snssai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
    supi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
  required:
    - notifType
    - gpsi
    - snssai

SliceAuthRevocNotification:
  description: >
    This data type includes information about a revocation notification for a given UE.
  type: object
  properties:
    notifType:
      $ref: '#/components/schemas/SliceAuthNotificationType'
    gpsi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
    snssai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
    supi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
  required:
    - notifType
    - gpsi
    - snssai

#
# SIMPLE TYPES:
#

SliceAuthCtxId:
  description: contains the resource ID of slice authentication context
  type: string
  nullable: false

EapMessage:
  description: contains an EAP packet
  type: string
  format: byte
  nullable: true

#
# ENUMS:
#

SliceAuthNotificationType:
  description: indicates the slice authentication notification type
```

```

type: string
enum:
  - SLICE_RE_AUTH
  - SLICE_REVOCATION

```

## A.3 Nnssaaf\_AIW API

openapi: 3.0.0

info:

```

title: Nnssaaf_AIW
version: 1.2.0-alpha.3
description: |
  AAA Interworking Authentication and Authorization Service.
  © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
  All rights reserved.

```

externalDocs:

```

description: 3GPP TS29.526, NSSAA Service, version 19.2.0.
url: https://www.3gpp.org/ftp/Specs/archive/29_series/29.526/

```

servers:

```

- url: '{apiRoot}/nnssaaf-aiw/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501

```

security:

```

- {}
- oAuth2ClientCredentials:
  - nnssaaf-aiw

```

paths:

```

/authentication:
  post:
    summary: Create authentication context
    operationId: CreateAuthenticationContext
    tags:
      - Authentications (Collections)
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AuthInfo'
          required: true
    responses:
      '201':
        description: AuthContext successfully created
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/AuthContext'
        headers:
          Location:
            description: 'Contains the URI of the newly created resource according to the
structure: {apiRoot}/nnssaaf-aiw/<apiVersion>/authentications/{authCtxId}'
            required: true
            schema:
              type: string
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':

```

```

    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '502':
    $ref: 'TS29571_CommonData.yaml#/components/responses/502'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  '504':
    $ref: 'TS29571_CommonData.yaml#/components/responses/504'

```

/authentications/{authCtxId}:

```

  put:
    summary: Confirm the authentication result
    operationId: ConfirmAuthentication
    tags:
      - Authentication (Document)
    parameters:
      - name: authCtxId
        in: path
        required: true
        schema:
          type: string
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/AuthConfirmationData'
    responses:
      '200':
        description: Request processed (EAP success or Failure)
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/AuthConfirmationResponse'
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '502':
        $ref: 'TS29571_CommonData.yaml#/components/responses/502'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      '504':
        $ref: 'TS29571_CommonData.yaml#/components/responses/504'

```

components:

```

  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            nssaaf-aiw: Access to the nssaaf-aiw API

```

schemas:

```

#
# COMPLEX TYPES:
#

AuthInfo:
  description: >
    This data type contains the SUPI, EAP ID Response from the UE.
  type: object
  properties:
    supi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
    eapIdRsp:
      $ref: 'TS29526_Nnssaaf_NSSAA.yaml#/components/schemas/EapMessage'
    ttlsInnerMethodContainer:
      $ref: 'TS29526_Nnssaaf_NSSAA.yaml#/components/schemas/EapMessage'
    supportedFeatures:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  required:
    - supi

AuthContext:
  description: >
    This data type contains the information of the resource created for authentication
    and authorization.
  type: object
  properties:
    supi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
    authCtxId:
      $ref: '#/components/schemas/AuthCtxId'
    eapMessage:
      $ref: 'TS29526_Nnssaaf_NSSAA.yaml#/components/schemas/EapMessage'
    ttlsInnerMethodContainer:
      $ref: 'TS29526_Nnssaaf_NSSAA.yaml#/components/schemas/EapMessage'
    supportedFeatures:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  required:
    - supi
    - authCtxId

AuthConfirmationData:
  description: >
    This data type contains the EAP message from the UE for EAP process.
  type: object
  properties:
    supi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
    eapMessage:
      $ref: 'TS29526_Nnssaaf_NSSAA.yaml#/components/schemas/EapMessage'
    supportedFeatures:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  required:
    - supi
    - eapMessage

AuthConfirmationResponse:
  description: >
    This data type contains the authentication and authorization result from
    the NSSAAF to the UE.
  type: object
  properties:
    supi:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
    eapMessage:
      $ref: 'TS29526_Nnssaaf_NSSAA.yaml#/components/schemas/EapMessage'
    authResult:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/AuthStatus'
    pvsInfo:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ServerAddressingInfo'
      minItems: 1
    msk:
      $ref: 'TS29509_Nausf_UEAuthentication.yaml#/components/schemas/Msk'
    supportedFeatures:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  required:

```

```
- supi
- eapMessage
```

#

# SIMPLE TYPES:

#

AuthCtxId:

description: contains the resource ID of authentication context

type: string

nullable: false

#

# ENUMS:

#

## Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2020-06	CT4#98E	C4-203683				TS skeleton.	0.1.0
2020-06	CT4#98E	C4-202084 C4-202085 C4-202086 C4-203709 C4-203710				Implementation of pCRs agreed in CT4#98E	0.2.0
2020-06	CT#88e	CP-201193				TS presented for information and approval.	1.0.0
2020-06	CT#88e					TS approved at CT#88e	16.0.0
2020-09	CT#89	CP-202104	0005	1	F	Update References	16.1.0
2020-09	CT#89	CP-202104	0007	1	F	Release PDU Session if NSSAA Re-Authentication and Re-Authorization Fails	16.1.0
2020-09	CT#89	CP-202104	0008	1	F	NSSAA status management	16.1.0
2020-12	CT#90	CP-203054	0009	2	F	Amendments for stateless NF support	16.2.0
2020-12	CT#90	CP-203040	0010	-	F	Remove Editor's Notes on AAA Server Address	16.2.0
2020-12	CT#90	CP-203048	0011	1	F	Storage of YAML files in 3GPP Forge	16.2.0
2020-12	CT#90	CP-203040	0012	1	F	AMF behaviour for NSSAA procedure due to temporal NW failure	16.2.0
2020-12	CT#90	CP-203036	0013	-	F	API version and External doc update	16.2.0
2021-03	CT#91	CP-210049	0014	-	F	Incorrect Media Type	16.3.0
2021-03	CT#91	CP-210054	0016	-	F	29.526 Rel-16 API version and External doc update	16.3.0
2021-03	CT#91	CP-210034	0015	1	F	OpenAPI Reference	17.0.0
2021-06	CT#92	CP-211068	0018	1	F	Unsuccessful cases for handling of NSSAA status in AMF	17.1.0
2021-06	CT#92	CP-211028	0019	-	F	TS Clean-up	17.1.0
2021-06	CT#92	CP-211068	0021	1	F	SUPI in Notifications from NSSAAF	17.1.0
2021-06	CT#92	CP-211059	0023	1	F	Redirect Response	17.1.0
2021-06	CT#92	CP-211050	0024	-	F	29.526 Rel-17 API version and External doc update	17.1.0
2021-09	CT#93	CP-212045	0026	1	F	Attack from AAA-S	17.2.0
2021-09	CT#93	CP-212070	0028	1	F	NSSAA procedure from two different AMFs	17.2.0
2021-09	CT#93	CP-212060	0031	-	F	3xx description correction for SCP	17.2.0
2021-09	CT#93	CP-212026	0032	-	F	Base64 Encoding of binary attributes in JSON objects	17.2.0
2021-09	CT#93	CP-212045	0033	-	F	Re-authentication Request when S-NSSAI is not in use	17.2.0
2021-09	CT#93	CP-212059	0034	-	F	29.526 Rel-17 API version and External doc update	17.2.0
2021-09	CT#94	CP-213139	0036	2	F	Remove AMF behaviour related to back-off timer from NSSAA procedure	17.3.0
2021-12	CT#94	CP-213085	0037	-	F	Miscellaneous corrections	17.3.0
2021-12	CT#94	CP-213139	0039	1	F	Correction to Re-Authentication / Revocation Notification Procedure	17.3.0
2021-12	CT#94	CP-213092	0041	1	F	Clarification of NSAC and exposure service	17.3.0
2021-12	CT#94	CP-213120	0042	-	F	307/308 redirection	17.3.0
2022-12	CT#95	CP-220047	0043	1	F	Changing the Title of the TS 29.526	17.4.0
2022-03	CT#95	CP-220047	0051	3	B	AIW Service	17.4.0
2022-03	CT#95	CP-220026	0053	1	F	3xx Redirect Response	17.4.0
2022-03	CT#95	CP-220075	0055	1	F	Incorrect Service Name	17.4.0
2022-03	CT#95	CP-220025	0057	-	F	EAP ID Response message	17.4.0
2022-03	CT#95	CP-220066	0058	-	F	29.526 Rel-17 API version and External doc update	17.4.0
2022-06	CT#96	CP-221051	0061	-	F	29.526 Rel-17 API version and External doc update	17.5.0
2022-09	CT#97	CP-222056	0063	-	F	Multiple GPSIs	17.6.0
2022-12	CT#98	CP-223049	0066	1	F	MSK in Primary Authentication Successful Response	17.7.0
2022-12	CT#98	CP-223066	0068	-	F	29.526 Rel-17 API version and External doc update	17.7.0
2022-12	CT#98	CP-223028	0065	1	F	Missing Mandatory Status Codes in OpenAPI	18.0.0
2022-12	CT#98	CP-223033	0067	-	F	29.526 Rel-18 API version and External doc update	18.0.0
2023-03	CT#99	CP-230066	0070	1	F	Corrections on the reference number	18.1.0
2023-06	CT#100	CP-231027	0069	4	F	Location header and missing Redirection clause	18.2.0
2023-06	CT#100	CP-231073	0074	1	F	Default Notification for Inter-PLMN Access	18.2.0
2023-09	CT#101	CP-232058	0075	-	F	Major API version	18.3.0
2023-09	CT#101	CP-232271	0076	1	F	29.526 Rel-18 API version and External doc update	18.3.0
2023-12	CT#102	CP-233027	0077	-	F	Obsoleted HTTP/2 RFCs	18.4.0
2023-12	CT#102	CP-233027	0078	-	F	ProblemDetails RFC 7807 obsoleted by 9457	18.4.0
2024-03	CT#103	CP-240072	0081	-	A	Attribute name alignment for Notification Type	18.5.0
2024-03	CT#103	CP-240053	0082	-	F	AAA-S server address	18.5.0
2024-06	CT#104	CP-241028	0083	1	F	Callbacks	18.6.0
2024-06	CT#104	CP-241042	0084	1	F	NSSAA in network slice replacement	18.6.0
2024-06	CT#104	CP-241050	0085	1	F	Miscellaneous corrections	18.6.0
2024-06	CT#104	CP-241028	0086	1	F	Missing Description fields in Network slice specific authentication and authorization (Nnssaaf_NSSAA API)	18.6.0
2024-06	CT#104	CP-241052	0087	-	F	29.526 Rel-18 API version and External doc update	18.6.0
2025-03	CT#107	CP-250024	0088	-	F	Error Correction to the OpenAPI	18.7.0
2025-03	CT#107	CP-250032	0089	-	F	Descriptions of Data Structures in OpenAPI	19.0.0
2025-03	CT#107	CP-250137	0091	-	F	29.526 Rel-19 API version and External doc update	19.0.0
2025-06	CT#108	CP-251067	0092	-	F	Correction on SliceNotificationType	19.1.0

2025-06	CT#108	CP-251079	0093	-	F	29.526 Rel-19 API version and External doc update	19.1.0
2025-09	CT#109	CP-252176	0094	-	F	29.526 Rel-19 API version and External doc update	19.2.0

---

# History

<b>Document history</b>		
V19.2.0	January 2026	Publication