

# ETSI TS 132 276 V18.0.0 (2024-05)



TECHNICAL SPECIFICATION

**Digital cellular telecommunications system (Phase 2+) (GSM);  
Universal Mobile Telecommunications System (UMTS);  
LTE;  
Telecommunication management;  
Charging management;  
Voice Call Service (VCS) charging  
(3GPP TS 32.276 version 18.0.0 Release 18)**



A GLOBAL INITIATIVE

---

**Reference**

RTS/TSGS-0532276vi00

---

**Keywords**

GSM,LTE,UMTS

**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our  
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <https://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope .....	6
2 References .....	6
3 Definitions, symbols and abbreviations .....	8
3.1 Definitions .....	8
3.2 Symbols.....	9
3.3 Abbreviations .....	9
4 Architecture considerations .....	11
4.1 High level Voice Call Service (VCS) architecture .....	11
4.2 VCS charging - Offline charging architecture .....	11
4.3 VCS charging - Online charging architecture .....	11
5 VCS charging principles and scenarios.....	13
5.1 VCS charging principles .....	13
5.2 VCS charging - Offline charging scenarios.....	13
5.2.1 Basic principles.....	13
5.2.2 Rf message flows .....	13
5.2.3 CDR generation .....	13
5.2.4 Ga record transfer flows .....	13
5.2.5 Bx CDR file transfer .....	13
5.3 VCS charging - Online charging scenarios .....	13
5.3.1 Basic principles.....	13
5.3.2 Ro message flows .....	15
5.3.2.1 Ro messages .....	15
5.3.2.2 Triggers for starting and stopping a VCS credit control session.....	15
5.3.2.3 Triggers for providing interim information for a VCS credit control session .....	15
5.3.2.4 Furnish Charging Information procedure.....	16
5.3.2.5 Support of Failure Situations.....	16
6 Definition of charging information .....	17
6.1 Data description for VCS charging - Offline charging .....	17
6.1.1 Rf message contents.....	17
6.1.2 Ga message contents .....	17
6.1.3 CDR description on the Bx interface .....	17
6.2 Data description for VCS charging - Online charging .....	17
6.2.1 Ro message contents .....	17
6.2.2 Debit / Reserve Units Request message .....	18
6.2.3 Debit / Reserve Units Response message.....	19
6.3 VCS charging specific parameters .....	19
6.3.1 Definition of VCS charging information .....	19
6.3.1.1 VCS charging information assignment for Service Information.....	19
6.3.1.2 Definition of the VCS information.....	20
6.3.1.3 Support of Charging Information in VCS offline charging.....	22
6.3.1.4 Support of Charging Information in VCS online charging .....	22
6.3.2 Formal VCS charging parameter description.....	28
6.3.2.1 VCS CDR parameters .....	28
6.3.2.2 VCS AVPs .....	28
6.4 Bindings for VCS Charging .....	28
<b>Annex A (informative): Relationship of VCS chargeable events to CAMEL events.....</b>	<b>30</b>
A.1 General .....	30

**Annex B (informative):**    **Change history** .....31  
History .....32

---

# Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

---

# 1 Scope

The present document is part of a series of documents that specify charging functionality and charging management in GSM/UMTS networks. The GSM/UMTS core network charging architecture and principles are specified in TS 32.240 [1], which provides an umbrella for other charging management TSs that specify:

- the content of the Charging Data Records (CDRs) per domain / subsystem / service (offline charging);
- the content of real-time charging messages per domain / subsystem / service (online charging);
- the functionality of online and offline charging for those domains / subsystems / services;
- the interfaces that are used in the charging framework to transfer the charging information (i.e. CDRs or charging events).

The complete document structure for these TSs is defined in TS 32.240 [1].

The present document specifies the online charging description for Voice Call Service (VCS) charging from a Proxy Function, based on the functional description of the Voice Call Service charging in the EU Roaming Regulations III specifications [298, 299].

The concept of voice call is interpreted as any CS call, whatever the teleservice used (speech, 3.1 kHz audio, Fax, or CS data) except CS video telephony calls (BS 37, 64 kbit/s unrestricted digital info mode).

Voice over LTE is not included in this definition. This charging specification includes the online charging architecture and scenarios specific to VCS charging from a Proxy Function, as well as the mapping of the common 3GPP charging architecture specified in TS 32.240 [1] onto VCS. It further specifies the charging events for online charging. The present document is related to other 3GPP charging TSs as follows:

- The common 3GPP charging architecture is specified in TS 32.240 [1];
- The 3GPP Diameter application that is used for VCS online charging is specified in TS 32.299 [50].

Offline charging for the VCS is solely based on TS 32.250 [10] and is outside the scope of the present document.

All references, abbreviations, definitions, descriptions, principles and requirements, used in the present document, that are common across 3GPP TSs, are defined in TR 21.905 [100] "Vocabulary for 3GPP Specifications".

Those that are common across charging management in GSM/UMTS domains, services or subsystems are provided in the umbrella document TS 32.240 [1] and are copied into clause 3 of the present document for ease of reading. Finally, those items that are specific to the present document are defined exclusively in the present document.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1] 3GPP TS 32.240: "Telecommunication management; Charging management; Charging Architecture and Principles".

[2]-[9] Void.

[10] 3GPP TS 32.250: "Telecommunication management; Charging management; Circuit Switched (CS) domain charging".

[11]	3GPP TS 32.251: "Telecommunication management; Charging management; Packet Switched (PS) domain charging".
[12]-[19]	Void.
[20]	3GPP TS 32.260: "Telecommunication management; Charging management; IP Multimedia Subsystem (IMS) charging".
[21]-[29]	Void.
[30]	3GPP TS 32.270: "Telecommunication management; Charging management; Multimedia Messaging Service (MMS) charging".
[31]-[49]	Void.
[50]	3GPP TS 32.299: "Telecommunication management; Charging management; Diameter charging application".
[51]-[55]	Void.
[56]	3GPP TS 32.293: "Telecommunication management; Charging management; Proxy Function".
[57]-[99]	Void.
[100]	3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
[101]	Void.
[102]	Void.
[103]	3GPP TS 23.002: "Network Architecture".
[104]-[199]	Void.
[200]-[206]	Void.
[207]	3GPP TS 23.078: "Customized Applications for Mobile network Enhanced Logic (CAMEL); Stage 2".
[208]-[211]	Void.
[212]	3GPP TS 29.078: "Customized Applications for Mobile network Enhanced Logic (CAMEL); CAMEL Application Part (CAP) specification".
[213]-[233]	Void.
[234]	3GPP TS 29.163: "Interworking between the IP Multimedia (IM) Core Network (CN) subsystem and Circuit Switched (CS) networks".
[232]-[297]	Void.
[298]	EU Roaming regulation III; Structural Solutions; High Level Technical Specifications
[299]	EU Roaming regulation III; Interface & Protocol; Detailed Technical Specifications
[300]-[399]	Void.
[400]-[499]	Void.
[500]-[599]	Void.



## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [100] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [100].

**CAMEL:** network feature that provides the mechanisms to support operator specific services even when roaming outside HPLMN.

**CAMEL subscription information:** identifies a subscriber as having CAMEL services.

**chargeable event:** activity utilizing telecommunication network resources and related services for:

- user to user communication (e.g. a single call, a data communication session or a short message); or
- user to network communication (e.g. service profile administration); or
- inter-network communication (e.g. transferring calls, signalling, or short messages); or
- mobility (e.g. roaming or inter-system handover); and
- that the network operator may want to charge for.

As a minimum, a chargeable event characterises the resource / service usage and indicates the identity of the involved end user(s).

**charged party:** user involved in a chargeable event who has to pay parts or the whole charges of the chargeable event, or a third party paying the charges caused by one or all users involved in the chargeable event, or a network operator.

**charging:** function within the telecommunications network and the associated OCS/BD components whereby information related to a chargeable event is collected, formatted, transferred and evaluated in order to make it possible to determine usage for which the charged party may be billed (offline charging) or the subscriber's account balance may be debited (online charging).

**charging event:** set of charging information forwarded by the CTF towards the CDF (offline charging) or towards the OCS (online charging). Each charging event matches exactly one chargeable event.

**charging function:** entity inside the core network domain, subsystem or service that is involved in charging for that domain, subsystem or service.

**Circuit Switched (CS) domain:** domain within GSM / UMTS in which information is transferred in circuit switched mode.

**credit control:** mechanism which directly interacts in real-time with an account and controls or monitors the charges, related to the service usage. Credit control is a process of: checking if credit is available, credit reservation, deduction of credit from the end user account when service is completed and refunding of reserved credit not used.

**domain:** part of a communication network that provides network resources using a certain bearer technology.

**GSM only:** qualifier indicating that this clause or paragraph applies only to a GSM system. For multi-system cases this is determined by the current serving radio access network.

**in GSM,....:** qualifier indicating that this paragraph applies only to GSM System.

**in UMTS,....:** qualifier indicating that this paragraph applies only to UMTS System.

**"middle tier" (charging) TS:** term used for the 3GPP charging TSs that specify the domain / subsystem / service specific, online and offline, charging functionality. These are all the TSs in the numbering range from TS 32.250 to TS 32.279, e.g. TS 32.250 [10] for the CS domain, or TS 32.270 [30] for the MMS service. Currently, there is only one "tier 1" TS in 3GPP, which is TS 32.240 [1] that specifies the charging architecture and principles. Finally, there are a number of top tier TSs in the 32.29x numbering range ([50] ff) that specify common charging aspects such as parameter definitions, encoding rules, the common billing domain interface or common charging applications.

**online charging:** charging mechanism where charging information **can** affect, in real-time, the service rendered and therefore a direct interaction of the charging mechanism with bearer/session/service control is required.

**Online Charging System:** the entity that performs real-time credit control. Its functionality includes transaction handling, rating, online correlation and management of subscriber account balances.

**real-time:** real-time charging and billing information is to be generated, processed, and transported to a desired conclusion in less than 1 second.

**successful call:** connection that reaches the communication or data transfer phase e.g. the "answered" state for speech connections. All other connection attempts are regarded as unsuccessful.

**tariff period:** part of one (calendar) day during which a particular tariff is applied. Defined by the time at which the period commences (the switch-over time) and the tariff to be applied after switch-over.

**tariff:** set of parameters defining the network utilisation charges for the use of a particular bearer / session / service.

**UMTS only:** qualifier indicating that this clause or paragraph applies only to a UMTS system. For multi-system cases this is determined by the current serving radio access network.

**voice call:** any CircuitSwitched call, whatever the teleservice used (speech, 3.1 kHz audio, Fax, or CS data) except CS video telephony calls (BS 37, 64 kbit/s unrestricted digital info mode). Voice over LTE is not included in this definition.

## 3.2 Symbols

For the purposes of the present document, the following symbols apply:

B	Interface between a VLR and its associated MSC(s).
C	Interface between an HLR and an MSC.
CAP	Reference point for CAMEL between a network element with integrated SSF and the OCS.
D	Interface between an HLR and a VLR.
Ge	Reference point between a gprsSSF and a gsmSCF.
Gr	Interface between an SGSN and an HLR.
Ro	Online charging reference point between a Proxy Function and the OCS.

## 3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [100] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [100].

3GPP	3 <sup>rd</sup> Generation Partnership Project
CAMEL	Customized Applications for Mobile network Enhanced Logic
CAP	CAMEL Application Part
CCA	Credit Control Answer
CCR	Credit Control Request
CS	Circuit Switched
CTF	Charging Trigger Function
DCCA	Diameter Credit Control Application
DP	Detection Point
EU	European Union
GMSC	Gateway MSC
gsmSCF	GSM Service Control Function
gsmSRF	GSM Specialized Resource Function
gsmSSF	GSM Service Switching Function
GSM	Global System for Mobile communication
HLR	Home Location Register
HPLMN	Home PLMN
IMSI	International Mobile Subscriber Identity
ISDN	Integrated Services Digital Network
MF	Mobile Forwarded
MO	Mobile Originated


MS	Mobile Station
MSC	Mobile services Switching Centre
MSISDN	Mobile Station ISDN number
MT	Mobile Terminated
OCS	Online Charging System
PLMN	Public Land Mobile Network
UMTS	Universal Mobile Telecommunications System
VCS	Voice Call Service
VLR	Visitor Location Register

## 4 Architecture considerations

### 4.1 High level Voice Call Service (VCS) architecture

The high level 3G logical architecture in TS 23.002 [103] is used for CS domain charging as in TS 32.250 [10]. Figure 4.1.1 shows the CAMEL entities as described in TS 23.002 [103]. Refer to TS 23.002 [103] for a description of the reference points not covered in the present document.

NOTE: Most CAMEL-specific interfaces have no particular name. They are designated by the name of the two entities they link together, e.g. "the gsmSSF-gsmSCF interface".

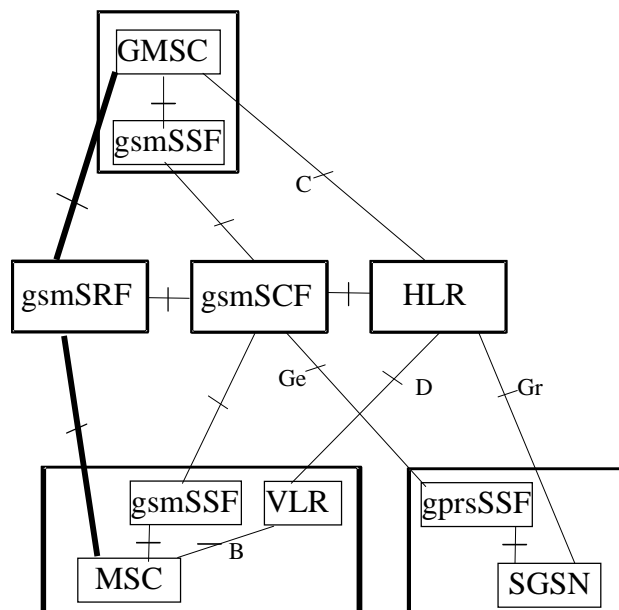

NOTE: The bold lines are used for interfaces supporting user data only, the dashed lines are used for interfaces supporting signalling only.

**Figure 4.1.1: Configuration of CAMEL entities**


CS domain online charging is implemented by CAMEL techniques as described in TS 23.078 [207] and TS 29.078 [212], i.e. outside the scope of the 32 series of charging TSs.

### 4.2 VCS charging - Offline charging architecture

Not specified in the present document.

### 4.3 VCS charging - Online charging architecture

As an alternative to direct CAMEL-based online charging of subscribers for voice calls, an online charging interface between a voice Proxy Function and the OCS is established. The concept of voice call shall be interpreted as any CS call, whatever the teleservice used (speech, 3.1 kHz audio, Fax, or CS data) except CS video telephony calls (BS 37, 64 kbit/s unrestricted digital info mode). The voice control architecture is shown in Figure 4.3.1.

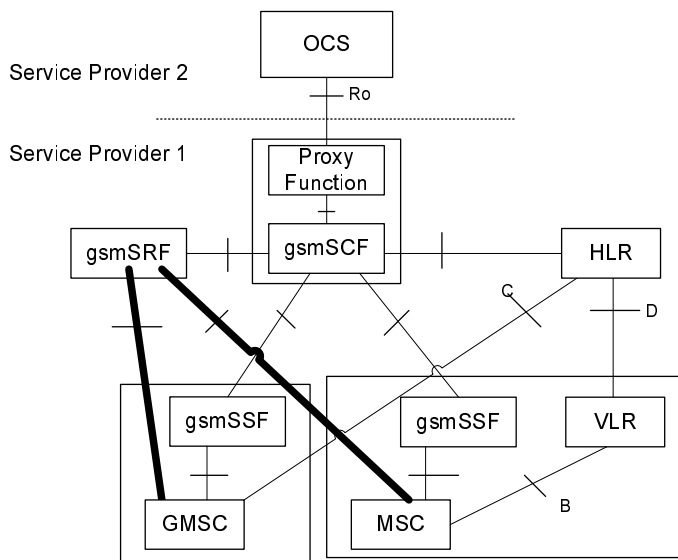

**Figure 4.3.1: VCS from a Proxy Function online charging architecture**

The signalling between the CS domain elements and a voice Proxy Function is implemented by CAMEL techniques as described in TS 23.078 [207] and TS 29.078 [212], i.e. outside the scope of the 32 series of charging TSs. The interface between a voice Proxy Function and the OCS utilizes Diameter Ro for the voice call service online charging as specified in the present document and utilizes the Proxy Function for mapping between CAMEL and Diameter as specified in TS 32.293 [56].

---

## 5 VCS charging principles and scenarios

### 5.1 VCS charging principles

The charging functions specified for VCS charging relate to:

- mobile originating calls;
- mobile terminating calls;
- mobile forwarded calls.

### 5.2 VCS charging - Offline charging scenarios

#### 5.2.1 Basic principles

Not specified in the present document.

#### 5.2.2 Rf message flows

Not specified in the present document.

#### 5.2.3 CDR generation

Not specified in the present document.

#### 5.2.4 Ga record transfer flows

Not specified in the present document.

#### 5.2.5 Bx CDR file transfer

Not specified in the present document.

### 5.3 VCS charging - Online charging scenarios

#### 5.3.1 Basic principles

VCS online charging may be performed by the Proxy Function using the common *Debit / Reserve Units* operation specified in TS 32.299 [50]. The Proxy Function shall be able to perform online charging for the following:

- charging information related to voice calls;

Session based online charging (SCUR) with centralized rating and centralized unit determination is required in the Proxy Function. The *Debit / Reserve Units Request* and *Debit / Reserve Units Response* messages are specified for SCUR in TS 32.299 [50]. The *Debit / Reserve Units Request* messages are issued towards the OCS when certain conditions (chargeable events) are met and *Debit / Reserve Units Response* messages are received from the OCS in response. The VCS charging specific contents and purpose of each of these messages, as well as the chargeable events that trigger them, are described in the following subclauses. A detailed formal description of the online charging parameters defined in the present document can be found in TS 32.299 [50]. Further information on the general principles of the common 3GPP online charging application can also be found in TS 32.299 [50] and TS 32.240 [1].

Since an operator is able to determine if charging is started at three different points in the progress of a voice call: call attempt, called party alerting, or called party answer, a configuration option is defined in the Proxy Function for this determination. On the Diameter interface, as defined below, the OCS is contacted on call attempt. This allows the OCS to identify the user account status and authorize (or not) the voice call attempt prior to utilizing network resources to

transport the call. At this time, a quota is also requested. The Proxy Function starts depleting the quota at the configured point progress of the call. The time this occurs is stored as the start of charging time delivered in the next update *Debit / Reserve Units Request* message to the OCS.

The following chargeable events are defined for VCS charging:

- Voice call attempt. Upon encountering this event, an initial *Debit / Reserve Units Request* message, indicating the start of the voice call, is sent towards the OCS to authorize the voice call attempt. The Proxy Function requests quota for voice call, setting the service-identifier to the value representing the type of voice call to be charged. Depending on operator configuration, the Proxy Function shall begin quota deduction and store the current time as start of charging time.
- Voice call answered. No message is sent. Depending on operator configuration, the Proxy Function shall begin quota deduction and save the current time as start of charging time.
- Voice call not answered – MO/MF only (e.g., busy, no answer, not reachable, route select failure). Upon encountering this event, corresponding counts for the voice call are closed and a terminate *Debit / Reserve Units Request* message, indicating the end of the voice call, is triggered. If the operator configuration has indicated that charging has started prior to answer, the start of charging time is provided with the used service units.
- Voice call not answered and call is conditionally forwarded – MT only (e.g., call forwarding on not reachable). Corresponding counts for the voice call are closed and an update *Debit / Reserve Units Request* message is triggered. If the operator configuration has indicated that charging has started prior to answer, the start of charging time is provided with the used service units. The subsequent response indicates if charging for terminating leg is to be maintained.
- Voice call not answered and call is not conditionally forwarded – MT only (e.g., busy, no answer, not reachable, route select failure). Upon encountering this event, corresponding counts for the voice call are closed and a termination *Debit / Reserve Units Request* message, indicating the end of the voice call, is triggered. If the operator configuration has indicated that charging has started prior to answer, the start of charging time is provided with the used service units.
- End of voice call. Upon encountering this event, a terminate *Debit / Reserve Units Request* message, indicating the end of the voice call, is sent towards the OCS together with the final counts. The start of charging time is provided with the used service units.
- Ro specific chargeable events (e.g. threshold reached, quota exhaustion, validity time reached, forced re-authorization). Corresponding counts for the voice call are closed and an update *Debit / Reserve Units Request* message is triggered according the rules defined in TS 32.299 [50].
- Change of charging condition: E.g. user location change. When this event is encountered and the corresponding re-authorization trigger is armed, all current counts are captured and sent towards the OCS with an update *Debit and Reserve Units Request* message.

**Editors's note: The encounter of this event in conjunction with the ability of the Trigger AVP is ffs.**

- Tariff time change. When this event is encountered, all current counts are captured and a new counts are started. The counts are sent to the OCS in next *Debit and Reserve Units Request* message.

Management intervention may also force trigger a chargeable event.

The OCS online charging function may use the Furnish Charging Information procedure to add online charging session specific information to the CDR generated by the MSC as currently supported for CAMEL as specified in TS 23.078 [207]

In case the OCS fails, the Proxy Function shall support the Failure Handling procedure and Failover mechanism described in TS 32.299 [50]. These mechanisms give flexibility to have different failure handling scenarios when the OCS fails.

Three different actions shall be supported when the failure handling mechanism is executed:

- Terminate: The online session is finished. The associated voice call is terminated (answered calls) or not established (new calls). Failover for ongoing voice calls is not supported. Failover for new voice calls is always supported.

- **Retry&Terminate:** The online session is finished. The associated voice call is terminated (answered calls) or not established (new calls). Failover for ongoing voice calls is supported. Failover for new voice calls is always supported.
- **Continue:** The online session is finished. The associated voice call is established (new calls) or not terminated (ongoing calls). Failover for ongoing voice calls is supported. Failover for new voice calls is always supported. It shall be operator configurable to limit the maximum duration of the voice call in this situation.

The OCS may request session re-authorization of active quota.

The OCS may request service termination synchronously in response to a *Reserve Units Request* or asynchronously via Diameter Abort-Session-Request. In either case, the voice Proxy Function shall initiate termination of the voice call using CAMEL procedures, as specified in TS 23.078 [207].

The OCS may specify a termination action, as per TS 32.299 [50] clause 5.3.3 and clause 6.5.3, for the voice Proxy Function on consumption of the final granted units. The only action supported is TERMINATE.

The following capabilities defined in TS 32.299 [50] are not applicable to VCS charging:

- Credit pooling
- Envelope reporting
- Online control of offline charging information
- Support of multiple service

NOTE: The Multiple Operation and Multiple Unit Operation information elements are utilized as per Table 6.2.2.1. Only one service is supported per VCS charging session.

## 5.3.2 Ro message flows

### 5.3.2.1 Ro messages

An initial, update and terminate *Debit and Reserve Units Request* message, as defined in TS 32.299 [50], is used by the Proxy Function to transfer the collected charging information towards the OCS. The *Debit and Reserve Units Response* message is used by the OCS to assign quotas for the service identifier, and to instruct the Proxy Function whether to continue or terminate a voice call.

The following clauses describe the trigger conditions for the chargeable events described in clause 5.3.1. These chargeable events correspond to the triggers for collection of charging information and *Debit and Reserve Units Request message* transmission towards the OCS. The responses from the OCS are also specified in the clauses below.

### 5.3.2.2 Triggers for starting and stopping a VCS credit control session

A initial *Debit and Reserve Units Request* is sent to OCS when a voice call is attempted.

A terminate *Debit and Reserve Units Request* is sent to OCS when:

- voice call is not answered (MO/MF)
- voice call not answered and not conditionally forwarded (MT)
- voice call is terminated
- voice call termination is indicated by the OCS (e.g. Credit Limit Reached)
- Abort-Session-Request is received from the OCS, this also results in voice call termination.

### 5.3.2.3 Triggers for providing interim information for a VCS credit control session

An update *Debit / Reserve Units Request* is sent to OCS when:

- Voice call not answered and call is conditionally forwarded (MT) ;



- Granted quota runs out;
- Validity time for granted quota expires;
- Update is requested by the OCS;
- Change of charging conditions occur and according to re-authorisation trigger, re-authorisation is needed;
- Management intervention.

#### 5.3.2.4 Furnish Charging Information procedure

The OCS online charging function may use this procedure to add online charging session specific information to the CDR maintained by the originating MSC by means of the *Debit and Reserve Units Request* operation. The Furnish Charging Information can be sent either in one *Debit and Reserve Units Response* message or several *Debit and Reserve Units Response* messages with append indicator.

The OCS online charging function can send multiple concatenated Furnish Charging Information elements per online charging session.

The total maximum of free format data Furnish Charging Information is 160 octets.

#### 5.3.2.5 Support of Failure Situations

In case the OCS fails the Proxy Function must support the Failure Handling procedure and Failover mechanism described in TS 32.299 [50].

According to TS 32.299 [50], timer Tx determines the maximum interval the Proxy Function shall wait for an answer to each credit control request sent to the OCS. When Tx expires, Proxy Function shall execute the Failover and Failure Handling mechanisms according to the behaviour described in TS 32.299 [50].

Three different actions shall be supported when the failure handling mechanism is executed:

- **Terminate:** The online session is finished. The associated voice call is terminated (answered calls) or not established (new calls). Failover for ongoing voice calls is not supported. Failover for new voice calls is always supported.
- **Retry&Terminate:** The online session is finished. The associated voice call is terminated (answered calls) or not established (new calls). Failover for ongoing voice calls is supported. Failover for new voice calls is always supported.
- **Continue:** The online session is finished. The associated voice call is established (new calls) or not terminated (ongoing calls). Failover for ongoing voice calls is supported. Failover for new voice calls is always supported. It shall be operator configurable to limit the maximum duration of the voice call in this situation.

## 6 Definition of charging information

### 6.1 Data description for VCS charging - Offline charging

#### 6.1.1 Rf message contents

Not specified in the present document.

#### 6.1.2 Ga message contents

Not specified in the present document.

#### 6.1.3 CDR description on the Bx interface

Not specified in the present document.

### 6.2 Data description for VCS charging - Online charging

#### 6.2.1 Ro message contents

Voice call service online charging uses the *Debit Units and Reserve Units* operation defined in TS 32.299 [50]. The *Debit and Reserve Units Request* message triggers the rating of the voice call service and reserves units on the user's account. The *Debit and Reserve Units Response* message is a response including any reserved units or an error code if the user is out of credit. Detailed information about the diameter online charging application is described in TS 32.299 [50].

The *Debit and Reserve Units Request* message for the "intermediate interrogation" and "final interrogation" reports the actual number of "units" that were used, from what was previously reserved. This determines the actual amount debited from the subscriber's account.

The following clauses describe the different fields used in the VCS charging messages.

Table 6.2.1.1 describes the use of these messages for online charging.

**Table 6.2.1.1: Online charging messages reference table**

Message	Source	Destination
Debit and Reserve Units Request	Proxy Function	OCS
Debit and Reserve Units Response	OCS	Proxy Function

## 6.2.2 Debit / Reserve Units Request message

Table 6.2.2.1 illustrates the basic structure of a *Debit / Reserve Units Request* message from the Proxy Function as used for voice call service online charging.

**Table 6.2.2.1: Debit / Reserve Units Request message contents**

Information Element	Category	Description
Session Identifier	M	Used as described in TS 32.299 [50].
Originator Host	M	Used as described in TS 32.299 [50].
Originator Domain	M	Used as described in TS 32.299 [50].
Destination Domain	M	Used as described in TS 32.299 [50].
Operation Identifier	M	Used as described in TS 32.299 [50].
Operation Token	M	Used as described in TS 32.299 [50].
Operation Type	M	Used as described in TS 32.299 [50].
Operation Number	M	Used as described in TS 32.299 [50].
Destination Host	O <sub>C</sub>	Used as described in TS 32.299 [50].
User Name	O <sub>C</sub>	Used as described in TS 32.299 [50].
Origination State	O <sub>C</sub>	Used as described in TS 32.299 [50].
Origination Timestamp	O <sub>C</sub>	Used as described in TS 32.299 [50].
Subscriber Identifier	O <sub>C</sub>	Used as described in TS 32.299 [50]. As a minimum the MSISDN and IMSI shall be included.
Termination Cause	O <sub>C</sub>	Used as described in TS 32.299 [50].
<del>Requested Action</del>	-	<del>Not used for VCS charging.</del>
Multiple Operation	O <sub>M</sub>	Used as described in TS 32.299 [50].
Multiple Unit Operation	O <sub>C</sub>	Used as described in TS 32.299 [50].
Subscriber Equipment Number	O <sub>C</sub>	Used as described in TS 32.299 [50].
Proxy Information	O <sub>C</sub>	Used as described in TS 32.299 [50].
Route Information	O <sub>C</sub>	Used as described in TS 32.299 [50].
Service Information	O <sub>M</sub>	Described in clause 6.3.1.1

## 6.2.3 Debit / Reserve Units Response message

Table 6.2.3.1 illustrates the basic structure of a Debit / Reserve Units Response message as used for the Proxy Function as used for voice call service online charging. This message is always used by the OCS as specified below.

**Table 6.2.3.1: Debit / Reserve Units Response message**

Information Element	Category	Description
Session Identifier	M	Used as described in TS 32.299 [50].
Operation Result	M	Used as described in TS 32.299 [50].
Originator Host	M	Used as described in TS 32.299 [50].
Originator Domain	M	Used as described in TS 32.299 [50].
Operation Identifier	M	Used as described in TS 32.299 [50].
Operation Type	M	Used as described in TS 32.299 [50].
Operation Number	M	Used as described in TS 32.299 [50].
Operation Failover	O <sub>C</sub>	Used as described in TS 32.299 [50].
Multiple Unit Operation	O <sub>C</sub>	Used as described in TS 32.299 [50].
Operation Failure Action	O <sub>C</sub>	Used as described in TS 32.299 [50].
Operation Event Failure Action	-	Not used for VCS charging.
Redirection Host	O <sub>C</sub>	Used as described in TS 32.299 [50].
Redirection Host Usage	O <sub>C</sub>	Used as described in TS 32.299 [50].
Redirection Cache Time	O <sub>C</sub>	Used as described in TS 32.299 [50].
Proxy Information	O <sub>C</sub>	Used as described in TS 32.299 [50].
Route Information	O <sub>C</sub>	Used as described in TS 32.299 [50].
Failed Parameter	O <sub>C</sub>	Used as described in TS 32.299 [50].
Service Information	O <sub>C</sub>	Described in in clause 6.3.1.1.

## 6.3 VCS charging specific parameters

### 6.3.1 Definition of VCS charging information

#### 6.3.1.1 VCS charging information assignment for Service Information

The VCS information element used for voice call service charging is provided in the Service Information information element.

**Table 6.3.1.1.1: Service Information used for VCS charging**

Information Element	Category	Description
Service Information	O <sub>M</sub>	A set of information elements holding the specific parameters as defined in TS 32.299 [50].
IMS Information	O <sub>C</sub>	This is a structured information element and holds IMS specific parameters. The complete structure is defined in TS 32.260 [20].
Node Functionality	M	This information element contains the function of the node: i.e. "Proxy-Function".
Role Of Node	O <sub>M</sub>	This information element specifies whether the Proxy Function is serving an Originating (MO) call, a Terminating (MT) call, or an Forwarding (MF) call.
Calling Party Address	O <sub>M</sub>	This information element contains the Calling Part Number converted from the CS domain to a Tel or SIP URI as per TS 29.163 [234] for the P-Asserted-Identity header.  NOTE: The address presentation restriction indication would be utilized for the transformation as per TS 29.163 [234] but would not be included directly for charging purposes as this is not currently utilized for CS domain or IMS charging.
Called Party Address	O <sub>C</sub>	This information element contains the Called Party Number converted from the CS domain to a Tel or SIP URI as per TS 29.163 [234] for the Request-URI. For an MO call, this IE contains the Called Party Number after processing by the Proxy Function (e.g., number normalization). It is included only when different from the contents of the Requested Party Address IE.
Requested Party Address	O <sub>C</sub>	This information element contains the Called Party BCD Number converted from the CS domain to a Tel or SIP URI as per TS 29.163 [234] for the Request-URI. This IE is included only for an MO call.
Service Specific Info	O <sub>C</sub>	This field contains service specific data.
PS Information	O <sub>C</sub>	This is a structured information element and holds PS specific parameters. The complete structure is defined in TS 32.251 [11].
User Location Info	O <sub>C</sub>	Used based on the definition in TS 32.251 [11].
MS TimeZone	O <sub>C</sub>	Used based on the definition in TS 32.251 [11].
User Location Info Time	O <sub>C</sub>	Used based on the definition in TS 32.251 [11].
VCS Information	O <sub>M</sub>	A set of information element holding the VCS parameters. The details are defined in clause 6.3.1.2.

### 6.3.1.2 Definition of the VCS information

VCS specific charging information is provided within the VCS Information.

**Table 6.3.1.2.1: Structure of the VCS Information**

Information Element	Category	Description
Bearer Capability	O <sub>C</sub>	This IE indicates the type of the bearer capability connection to the user. This IE includes several fields: info transfer capability, coding standard, info transfer rates, transfer mode, establishment configuration, structure, user info layer 1 protocol, layer 1 identity, user rate, negotiation, sync/async, flow control, and several others.
Network Call Reference Number	O <sub>M</sub>	This IE gives the network call reference number assigned to the call by the GMSC/MSC. It must be combined with the identity of the MSC that allocated it in order to unambiguously identify the call.
MSC Address	O <sub>M</sub>	This IE identifies the international E.164 address of the MSC that generated the network call reference number.
Basic Service Code	O <sub>C</sub>	This IE indicates the type of basic service utilized. This can be either a bearer service or a teleservice.
Bearer Service	O <sub>C</sub>	This IE indicates the bearer service utilized.
Teleservice	O <sub>C</sub>	This IE indicates the teleservice utilized.

Information Element	Category	Description
ISUP Location Number	O <sub>C</sub>	This IE indicates the location number of the served user. It contains an E.164 number as transported in ISUP.
VLR Number	O <sub>C</sub>	This IE identifies the international E.164 address of the VLR serving the user.
Forwarding Pending	O <sub>C</sub>	This IE indicates that the MSC received a forwarded-to-number and that the call will be forwarded due to GSM supplementary service call forwarding in the GMSC. This is applicable to MT calls only.
ISUP Cause	O <sub>C</sub>	This IE indicates the reason the call was released.
ISUP Cause Value	O <sub>C</sub>	This IE identifies the reason the call was released.
ISUP Cause Location	O <sub>C</sub>	This IE identifies the network in which the event causing the call release.
ISUP Cause Diagnostics	O <sub>C</sub>	This IE contains the diagnostics associated with the release of the voice call service.
Call Start Time	O <sub>C</sub>	This IE contains the initial time at the MSC initiating the dialog.
Start of Charging	O <sub>C</sub>	This IE contains the time origin for charging and may be equivalent to the time call setup is initiated or the time the call is answered depending on configuration in the Voice Proxy. It is only sent when call setup is successful.
Call Stop Time	O <sub>C</sub>	This IE contains the time when the call is released.
Free Format Data	O <sub>C</sub>	This IE contains online charging specific information that is to be included in CDRs generated by the MSC.

Table 6.3.1.2.2: Structure of the Multiple Unit Operation for VCS

Information Element	Category	Description
Granted Service Unit	O <sub>C</sub>	This IE contains the amount of granted service units for a particular category.
Tariff Time Change	O <sub>C</sub>	This IE contains the switch time when the tariff will be changed.
CC Time	O <sub>C</sub>	This IE contains the amount of granted time.
CC Money	-	Not used in VCS.
CC Total Octets	-	Not used in VCS.
CC Input Octets	-	Not used in VCS.
CC Output Octets	-	Not used in VCS.
CC Service Specific Units	-	Not used in VCS.
Requested Service Unit	O <sub>C</sub>	This IE contains an indication that units are needed for a particular category.
CC Time	-	Not used in VCS.
CC Total Octets	-	Not used in VCS.
CC Input Octets	-	Not used in VCS.
CC Output Octets	-	Not used in VCS.
CC Service Specific Units	-	Not used in VCS.
Used Service Unit	O <sub>C</sub>	This IE contains the amount of used non-monetary service units measured for a particular category to a particular quota type.
Reporting Reason	O <sub>C</sub>	Used as defined in TS 32.299 [50], clause 7.2.
Tariff Change Usage	O <sub>C</sub>	This IE identifies the reporting period for the used service unit, i.e. before, after or during tariff change.
CC Time	O <sub>C</sub>	This IE contains the amount of used time.
CC Total Octets	-	Not used in VCS.
CC Input Octets	-	Not used in VCS.
CC Output Octets	-	Not used in VCS.
CC Service Specific Units	-	Not used in VCS.
Event Charging Time Stamp	-	Not used in VCS.
Service Identifier	O <sub>C</sub>	This IE contains identity of the used service. This ID with the Service-Context-ID together forms a unique identification of the service.
Rating Group	O <sub>C</sub>	This IE contains the identifier of a rating group.

Information Element	Category	Description
G-S-U Pool Reference	-	Not used in VCS.
Validity Time	O <sub>C</sub>	This IE contains the time in order to limit the validity of the granted quota for a given category instance.
Result Code	-	Not used in VCS.
Final Unit Indication	O <sub>C</sub>	This IE indicates that the Granted Service Unit contains the final units for the service as defined in TS 32.299 [50].
Final Unit Action	M	Used as defined in TS 32.299 [50].
Restriction Filter Rule	-	Not used in VCS.
Filter Id	-	Not used in VCS.
Redirect Server	-	Not used in VCS.
Redirect Address Type	-	Not used in VCS.
Redirect Server Address	-	Not used in VCS.
Time Quota Threshold	-	Not used in VCS.
Volume Quota Threshold	-	Not used in VCS.
Unit Quota Threshold	-	Not used in VCS.
Quota Holding Time	-	Not used in VCS.
Quota Consumption Time	-	Not used in VCS.
Reporting Reason	O <sub>C</sub>	Used as defined in TS 32.299 [50], clause 7.2.
Trigger	-	Not used in VCS.
PS Furnish Charging Information	-	Not used in VCS.
Refund Information	-	Not used in VCS.
AF Correlation Information	-	Not used in VCS.
Envelope	-	Not used in VCS.
Envelop Reporting	-	Not used in VCS.
Time Quota Mechanism	-	Not used in VCS.
Service Specific Info	-	Not used in VCS.
QoS Information	-	Not used in VCS.

### 6.3.1.3 Support of Charging Information in VCS offline charging

Not specified in the present document.

### 6.3.1.4 Support of Charging Information in VCS online charging

Table 6.3.1.4.1 specifies per Operation type, the charging data that are sent by the Proxy Function in the *Debit / Reserve Units Request message* for the different call types MO, MT, and MF.

**Table 6.3.1.4.1: Supported fields in *Debit / Reserve Units Request* message**



Information Element	Node Type	Proxy Function		
	Call Type	MO	MT	MF
	Supported Operation Types	I/U/T	I/U/T	I/U/T
Session Identifier		IUT	IUT	IUT
Originator Host		IUT	IUT	IUT
Originator Domain		IUT	IUT	IUT
Destination Domain		IUT	IUT	IUT
Operator Identifier		IUT	IUT	IUT
Operation Token		IUT	IUT	IUT
Operation Type		IUT	IUT	IUT
Operation Number		IUT	IUT	IUT
Destination Host		IUT	IUT	IUT
User Name		IUT	IUT	IUT
Origination State		IUT	IUT	IUT
Origination Timestamp		IUT	IUT	IUT
Subscriber Identifier		IUT	IUT	IUT
Termination Cause		--T	--T	--T
Requested Action		-	-	-
Multiple Operation		IUT	IUT	IUT
Multiple Unit Operation		IUT	IUT	IUT
Subscriber Equipment Number		IUT	IUT	IUT
Proxy Information		IUT	IUT	IUT
Route Information		IUT	IUT	IUT
Service Information		IUT	IUT	IUT
<b>Service Information with IMS Information</b>				
Node Functionality		IUT	IUT	IUT
Role of Node		IUT	IUT	IUT
Calling Party Address		IUT	IUT	IUT
Called Party Address		IUT	IUT	IUT
Requested Party Address		IUT	-	-
Service Specific Info		IUT	IUT	IUT
<b>Service Information with PS Information</b>				
User Location Info		IUT	IUT	IUT
MS TimeZone		IUT	IUT	IUT
User Location Info Time		IUT	IUT	IUT
<b>Service Information with VCS Information</b>				
Bearer Capability		IUT	IUT	IUT
Network Call Reference Number		IUT	IUT	IUT
MSC Address		IUT	IUT	IUT
Basic Service Code		IUT	IUT	IUT
ISUP Location Number		IUT	IUT	IUT
VLR Number		IUT	IUT	IUT
Forwarding Pending		-	IUT	-
ISUP Cause		--T	--T	--T
ISUP Cause Value		--T	--T	--T
ISUP Cause Location		--T	--T	--T
ISUP Cause Diagnostics		--T	--T	--T
Call Start Time		IUT	IUT	IUT
Start of Charging		IUT	IUT	IUT
Call Stop Time		--T	--T	--T
Free Format Data		-	-	-
<b>Multiple Unit Operation</b>				
Granted Service Unit		-	-	-
Requested Service Unit		IU-	IU-	IU-
CC Time		-	-	-
CC Total Octets		-	-	-
CC Input Octets		-	-	-
CC Output Octets		-	-	-
CC Service Specific Units		-	-	-
Used Service Unit		-UT	-UT	-UT
Reporting Reason		-UT	-UT	-UT
Tariff Change Usage		-UT	-UT	-UT
CC Time		-UT	-UT	-UT
CC Total Octets		-	-	-
CC Input Octets		-	-	-

CC Output Octets	-	-	-
CC Service Specific Units	-	-	-
Event Charging Time Stamp	-	-	-
Service Identifier	IUT	IUT	IUT
Rating Group	IUT	IUT	IUT
G-S-U Pool Reference	-	-	-
Validity Time	-	-	-
Result Code	-	-	-
Final Unit Indication	-	-	-
Final Unit Action	-	-	-
Restriction Filter Rule	-	-	-
Filter Id	-	-	-
Redirect Server	-	-	-
Redirect Address Type	-	-	-
Redirect Server Address	-	-	-
Time Quota Threshold	-	-	-
Volume Quota Threshold	-	-	-
Unit Quota Threshold	-	-	-
Quota Holding Time	-	-	-
Quota Consumption Time	-	-	-
Reporting Reason	-UT	-UT	-UT
Trigger	-	-	-
PS Furnish Charging Information	-	-	-
Refund Information	-	-	-
AF Correlation Information	-	-	-
Envelope	-	-	-
Envelop Reporting	-	-	-
Time Quota Mechanism	-	-	-
Service Specific Info	---	---	---
QoS Information	-	-	-

Table 6.3.1.4.2 specifies per Operation type, the charging data that are sent in the *Debit / Reserve Units Response* message for the different call types MO, MT, and MF.

**Table 6.3.1.4.2: Supported fields in *Debit / Reserve Units Response* message**

Information Element	Node Type	Proxy Function	Proxy Function	Proxy Function
	Call Type	MO	MT	MF
	Supported Operation Types	I/U/T	I/U/T	I/U/T
Session Identifier		IUT	IUT	IUT
Operation Result		IUT	IUT	IUT
Originator Host		IUT	IUT	IUT
Originator Domain		IUT	IUT	IUT
Operation Identifier		IUT	IUT	IUT
Operation Type		IUT	IUT	IUT
Operation Number		IUT	IUT	IUT
Operation Failover		IUT	IUT	IUT
Multiple Unit Operation		IUT	IUT	IUT
Operation Failure Action		IUT	IUT	IUT
Operation Event Failure Action		-	-	-
Redirection Host		IUT	IUT	IUT
Redirection Host Usage		IUT	IUT	IUT
Redirection Cache Time		IUT	IUT	IUT
Proxy Information		IUT	IUT	IUT
Route Information		IUT	IUT	IUT
Failure Parameter		IUT	IUT	IUT
Service Information		IUT	IUT	IUT
<b>Service Information with IMS Information</b>				
Node Functionality		-	-	-
Role of Node		-	-	-
Calling Party Address		-	-	-
Called Party Address		-	-	-
Requested Party Address		-	-	-
Service Specific Info		-	-	-
<b>Service Information with PS Information</b>				
User Location Info		-	-	-
MS TimeZone		-	-	-
User Location Info Time		-	-	-
<b>Service Information with VCS Information</b>				
Bearer Capability		-	-	-
Network Call Reference Number		-	-	-
MSC Address		-	-	-
Basic Service Code		-	-	-
ISUP Location Number		-	-	-
VLR Number		-	-	-
Forwarding Pending		-	-	-
ISUP Cause		-	-	-
ISUP Cause Value		-	-	-
ISUP Cause Location		-	-	-
ISUP Cause Diagnostics		-	-	-
Call Start Time		-	-	-
Start of Charging		-	-	-
Call Stop Time		-	-	-
Free Format Data		IUT	IUT	IUT
<b>Multiple Unit Operation</b>				
Granted Service Unit		IU-	IU-	IU-
Tariff Time Change		IU-	IU-	IU-
CC Time		IU-	IU-	IU-
CC Total Octets		-	-	-
CC Input Octets		-	-	-
CC Output Octets		-	-	-
CC Service Specific Units		-	-	-
Requested Service Unit		-	-	-
Used Service Unit		-	-	-
Service Identifier		IU-	IU-	IU-
Rating Group		IU-	IU-	IU-
G-S-U Pool Reference		-	-	-
Validity Time		IU-	IU-	IU-
Result Code		-	-	-
Final Unit Indication		IU-	IU-	IU-
Final Unit Action		IU-	IU-	IU-

Restriction Filter Rule	-	-	-
Filter Id	-	-	-
Redirect Server	-	-	-
Redirect Address Type	-	-	-
Redirect Server Address	-	-	-
Time Quota Threshold	-	-	-
Volume Quota Threshold	-	-	-
Unit Quota Threshold	-	-	-
Quota Holding Time	-	-	-
Quota Consumption Time	-	-	-
Reporting Reason	-	-	-
Trigger	-	-	-
PS Furnish Charging Information	-	-	-
Refund Information	-	-	-
AF-Correlation Information	-	-	-
Envelope	-	-	-
Envelop Reporting	-	-	-
Time Quota Mechanism	-	-	-
Service Specific Info	-	-	-
QoS Information	-	-	-

## 6.3.2 Formal VCS charging parameter description

### 6.3.2.1 VCS CDR parameters

Not specified in the present document.

### 6.3.2.2 VCS AVPs

The detailed charging event parameter definitions are specified in 3GPP TS 32.299 [50].

## 6.4 Bindings for VCS Charging

This clause describes the mapping between the charging information messages and fields described for VCS Charging and the Diameter messages and AVPs.

As defined in TS 32.299 [50], the corresponding Diameter Credit-Control Application (DCCA) commands for the *Debit and Reserve Units Request* message is Credit-Control-Request (CCR) and for the *Debit and Reserve Units Response* message is Credit-Control-Answer (CCA).

Table 6.4.1 specifies the bindings for parameters used for VCS Charging for the *Debit and Reserve Units* operation defined in this document.

**Table 6.4.1: Bindings between Information Elements and AVPs**

<b>Information Element</b>	<b>AVP</b>
IMS Information	IMS-Information
Node Functionality	Node-Functionality
Role of Node	Role-of-Node
Calling Party Address	Calling-Party-Address
Called Party Address	Called-Party-Address
Requested Party Address	Requested-Party-Address
PS Information	PS-Information
User Location Info	3GPP-User-Location-Info
MS TimeZone	3GPP-MS-TimeZone
User Location Info Time	User-Location-Info-Time
VCS Information	VCS-Information
Bearer Capability	Bearer-Capability
Network Call Reference Number	Network-Call-Reference-Number
MSC Address	MSC-Address
Basic Service Code	Basic-Service-Code
Bearer Service	Bearer-Service
Teleservice	Teleservice
ISUP Location Number	ISUP-Location-Number
VLR Number	VLR-Number
Forwarding Pending	Forwarding-Pending
ISUP Cause	ISUP-Cause
ISUP Cause Value	ISUP-Cause-Value
ISUP Cause Location	ISUP-Cause-Location
ISUP Cause Diagnostic	ISUP-Cause-Diagnostic
Call Start Time	Start-Time
Start of Charging	Start-of-Charging
Call Stop Time	Stop-Time
Free Format Data	PS-Free-Format-Data
Multiple Unit Operation	Multiple-Services-Credit-Control
Granted Service Unit	Granted-Service-Unit
Tariff Time Change	Tariff-Time-Change
CC Time	CC-Time
Requested Service Unit	Requested-Service-Unit
Used Service Unit	Used-Service-Unit
Tariff Change Usage	Tariff-Change-Usage
Service Identifier	Service-Identifier
Rating Group	Rating-Group
Final Unit Indication	Final-Unit-Indication
Final Unit Action	Final-Unit-Action

# Annex A (informative): Relationship of VCS chargeable events to CAMEL events

## A.1 General

There is a similarity to the chargeable events identified in the present document in clause 5.3.1, to those events defined for use in CAMEL in TS 23.078 [207]. This relationship, provided for information only, is identified in Table A.1.1. The table focuses on CAMEL Phase 2, but is also generally applicable to later phases. This relationship does not imply a specific implementation in the voice Proxy Function as there could be multiple ways to implement voice call charging using CAMEL techniques. As an example, the end of voice call could be detected by explicit notification of a listed event in an Event Report BCSM; receipt of an Apply Charging Report with call inactive indication; or receipt of Call Information Report.

**Table A.1.1. Relationship of VCS chargeable events to CAMEL events**

Event	BCSM Event for MO	BCSM Event for MT	BCSM Event for MF
Voice call attempt	DP2 Collected Info	DP12 Terminating_Attempt_Authorized	DP2 Collected_Info
Voice call answered	DP7 O_Answer	DP15 T-Answer	DP7 O_Answer
Voice call not answered	DP4 Route_Select_Failure DP5 O_Busy DP6 O_No_Answer DP10 O_Abandon	This event is not applicable, see subsequent events in table.	DP4 Route_Select_Failure DP5 O_Busy DP6 O_No_Answer DP10 O_Abandon
Voice call not answered and call is conditionally forwarded	Not applicable	DP13 T_Busy DP14 T_No_Answer	Not applicable
Voice call not answered and call is not conditionally forwarded	Not applicable	DP13 T_Busy DP14 T_No_Answer DP18 T_Abandon	Not applicable
End of voice call	DP9 O_Disconnect	DP17 T_Disconnect	DP9 O_Disconnect

## Annex B (informative): Change history

Change history							
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New
2014-06	SA#64	SP-140327			Presented for approval	1.3.0	2.0.0
					Upgrade to Rel-12	2.0.0	12.0.0
2014-09					Introducing new keywords	12.0.0	12.0.1
2015-09	SA#69	SP-150427	001	1	Removal of inconsistencies for VCS Charging	12.0.1	12.1.0
2016-01					Update to Rel-13(MCC)	12.1.0	13.0.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2017-03	SA#75					Promotion to Release 14 without technical change	14.0.0
2017-06	SA#76	SP-170514	0003	-	F	Correction of ISUP Cause not shown as grouped	14.1.0
2018-06	-	-	-	-	-	Update to Rel-15 version (MCC)	15.0.0
2020-07	-	-	-	-	-	Update to Rel-16 version (MCC)	16.0.0
2022-03	-	-	-	-	-	Update to Rel-17 version (MCC)	17.0.0
2024-04	-	-	-	-	-	Update to Rel-18 version (MCC)	18.0.0



---

# History

<b>Document history</b>		
V18.0.0	May 2024	Publication