

ETSI TS 137 113 V19.1.0 (2026-02)



TECHNICAL SPECIFICATION

**Digital cellular telecommunications system (Phase 2+) (GSM);
Universal Mobile Telecommunications System (UMTS);
LTE;
5G;
NR, E-UTRA, UTRA and GSM/EDGE;
Multi-Standard Radio (MSR) Base Station (BS)
Electromagnetic Compatibility (EMC)
(3GPP TS 37.113 version 19.1.0 Release 19)**



Reference

RTS/TSGR-0437113vj10

Keywords

5G,GSM,LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#) repository.

Users should be aware that the present document may be revised or have its status changed,
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2026.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope	7
2 References	7
3 Definitions, symbols and abbreviations	9
3.1 Definitions	9
3.2 Symbols.....	12
3.3 Abbreviations	12
4 Test conditions	13
4.1 General	13
4.2 Arrangements for establishing a communication link	13
4.2.1 Multiple enclosure BS solution.....	14
4.3 Narrow band responses on receivers	14
4.4 Exclusion bands.....	14
4.4.1 Transmitter exclusion band.....	15
4.4.2 Receiver exclusion band	15
4.5 BS test configurations	15
4.6 Manufacturer declarations	19
5 Performance assessment.....	19
5.1 General	19
5.2 Assessment of performance in Downlink.....	20
5.3 Assessment of performance in Uplink.....	20
5.4 Ancillary equipment	20
6 Performance criteria	20
6.1 Performance criteria for continuous phenomena for BS	21
6.1.1 E-UTRA performance criteria	21
6.1.2 UTRA performance criteria	21
6.1.3 GSM/EDGE performance criteria.....	22
6.1.3.1 GSM/EDGE downlink	22
6.1.3.2 GSM/EDGE uplink	22
6.1.4 NB-IoT performance criteria	22
6.1.5 NR performance criteria	23
6.2 Performance criteria for transient phenomena for BS	23
6.3 Performance criteria for continuous phenomena for Ancillary equipment.....	24
6.4 Performance criteria for transient phenomena for Ancillary equipment	24
7 Applicability overview	25
7.1 Emission	25
7.2 Immunity	25
8 Emission	26
8.1 Test configurations	26
8.2 Radiated emission from Base Station and ancillary equipment.....	26
8.2.1 Radiated emission for Base Stations	26
8.2.1.1 Definition	26
8.2.1.2 Test method.....	26
8.2.1.3 Limits	27
8.2.1.4 Interpretation of the measurement results	27
8.2.2 Radiated emission, ancillary equipment	28
8.2.2.1 Definition	28
8.2.2.2 Test method.....	28

8.2.2.3	Limits	28
8.3	Conducted emission DC power input/output port	28
8.3.1	Definition	29
8.3.2	Test method	29
8.3.3	Limits	29
8.4	Conducted emissions, AC mains power input/output port	29
8.4.1	Definition	29
8.4.2	Test method	29
8.4.3	Limits	29
8.5	Harmonic current emissions (AC mains input port)	30
8.6	Voltage fluctuations and flicker (AC mains input port)	30
8.7	Telecommunication ports	30
8.7.1	Definition	30
8.7.2	Test method	30
8.7.3	Limits	30
9	Immunity	31
9.1	Test configurations	31
9.2	RF electromagnetic field (80 MHz - 6000 MHz)	32
9.2.1	Definition	32
9.2.2	Test method and level	32
9.2.3	Performance criteria	32
9.3	Electrostatic discharge	32
9.3.1	Definition	32
9.3.2	Test method and level	32
9.3.3	Performance criteria	33
9.4	Fast transients common mode	33
9.4.1	Definition	33
9.4.2	Test method and level	33
9.4.3	Performance criteria	33
9.5	RF common mode (0,15 MHz - 80 MHz)	33
9.5.1	Definition	34
9.5.2	Test method and level	34
9.5.3	Performance criteria	34
9.6	Voltage dips and interruptions	34
9.6.1	Definition	34
9.6.2	Test method and level	35
9.6.3	Performance criteria	35
9.7	Surges, common and differential mode	35
9.7.1	Definition	35
9.7.2	Test method and level	35
9.7.2.1	Test method for telecommunication ports directly connected to outdoor cables	36
9.7.2.2	Test method for telecommunication ports connected to indoor cables	36
9.7.2.3	Test method for AC power ports	36
9.7.3	Performance criteria	36
Annex A (normative): BER assessment for GSM/EDGE		37
A.1	Assessment of BER at the output of a transmitter	37
A.1.1	Assessment of BER using static layer 1 functions	37
A.1.2	Assessment of BER using RXQUAL	37
A.2	Assessment of BER at the output of a receiver	37
A.2.1	Assessment of BER using RXQUAL	37
A.2.2	Assessment of BER using reported BER	37
Annex B (normative): Simplified immunity testing		38
B.1	Applicability	38
B.2	Capability Sets for simplified immunity testing	38
Annex C (informative): Change history		40
History		43

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document covers the assessment of NR, E-UTRA, UTRA, GSM/EDGE and NB-IoT Multi-Standard Radio (MSR) Base Stations and associated ancillary equipment in respect of Electromagnetic Compatibility (EMC).

The present document specifies the applicable test conditions, performance assessment and performance criteria for NR, E-UTRA, UTRA, GSM/EDGE and NB-IoT Base Stations and associated ancillary equipment in one of the following categories:

- Multi-Standard Radio (MSR) Base Stations for NR, E-UTRA, UTRA and GSM/EDGE meeting the requirements of TS 37.104 [6], with conformance demonstrated by compliance to TS 37.141 [11].

NOTE: For NR, scope of this specification is limited to *BS type I-C*. For EMC requirements of the MSR BS for *BS type I-H* and *BS type I-O*, refer to TS 37.114 [39].

- *BS type I-C* for NR meeting the requirements of TS 38.104 [35], with conformance demonstrated by compliance to TS 38.141-1 [36]
- Base Stations for E-UTRA meeting the requirements of TS 36.104 [4], with conformance demonstrated by compliance to TS 36.141 [9].
- Base Stations for UTRA FDD meeting the requirements of TS 25.104 [2], with conformance demonstrated by compliance to TS 25.141 [7].
- Base Stations for UTRA TDD meeting the requirements of TS 25.105 [3], with conformance demonstrated by compliance to TS 25.142 [8].
- Base Stations for GSM/EDGE meeting the requirements of TS 45.005 [5], with conformance demonstrated by compliance to TS 51.021 [10].
- Base Stations for NB-IoT meeting the requirements of TS 36.104 [4], with conformance demonstrated by compliance to TS 36.141 [9].

In addition to MSR base stations, the present document covers other BS supporting more than one RAT.

Technical requirements related to the antenna port of Base Stations are not included in the present document. These are found in the relevant product standards [2-11, 35, 36].

The environment classification used in the present document refers to the residential, commercial, and light industrial environment classification used in IEC 61000-6-1 [12], IEC 61000-6-3 [13] and IEC 61000-6-8 [41].

The EMC requirements have been selected to ensure an adequate level of compatibility for apparatus at residential, commercial and light industrial environments. The levels, however, do not cover extreme cases which may occur in any location but with low probability of occurrence.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".

[2] 3GPP TS 25.104: "Base Station (BS) radio transmission and reception (FDD)".

- [3] 3GPP TS 25.105: "Base Station (BS) radio transmission and reception (TDD)".
- [4] 3GPP TS 36.104: "Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) radio transmission and reception".
- [5] 3GPP TS 45.005: "Radio transmission and reception".
- [6] 3GPP TS 37.104: "NR, E-UTRA, UTRA and GSM/EDGE; Multi-Standard Radio (MSR) Base Station (BS) radio transmission and reception".
- [7] 3GPP TS 25.141: "Base Station (BS) conformance testing (FDD)".
- [8] 3GPP TS 25.142: "Base Station (BS) conformance testing (TDD)".
- [9] 3GPP TS 36.141: "Evolved Universal Terrestrial Radio Access (E-UTRA); Base Station (BS) conformance testing".
- [10] 3GPP TS 51.021: "Base Station System (BSS) equipment specification; Radio aspects".
- [11] 3GPP TS 37.141: "NR, E-UTRA, UTRA and GSM/EDGE; Multi-Standard Radio (MSR) Base Station (BS) conformance testing".
- [12] IEC 61000-6-1: 2005: "Electromagnetic compatibility (EMC) - Part 6-1: Generic standards – Immunity for residential, commercial and light-industrial environments".
- [13] IEC 61000-6-3: 2020: "Electromagnetic compatibility (EMC) - Part 6-3: Generic standards – Emission standard for equipment in residential environments".
- [14] IEC 60050-161: "International Electrotechnical Vocabulary (IEV) - Part 161: Electromagnetic compatibility".
- [15] ITU-R Recommendation SM.329: "Unwanted emissions in the spurious domain".
- [16] ITU-R Recommendation SM.1539-1 (2001): "Variation of the boundary between the out-of-band and spurious domains required for the application of Recommendations ITU-R SM.1541 and ITU-R SM.329".
- [17] Void
- [18] Void
- [19] IEC 61000-3-2 (2004): "Electromagnetic compatibility (EMC) - Part 3-2: Limits - Limits for harmonic current emissions (equipment input current ≤ 16 A)".
- [20] IEC 61000-3-12 (2005): "Electromagnetic compatibility (EMC) - Part 3-12: Limits - Limits for harmonic current produced by equipment connected to public low-voltage system with input current >16 A and ≤ 75 A".
- [21] IEC 61000-3-3 (2002): "Electromagnetic compatibility (EMC) - Part 3-3: Limits - Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current ≤ 16 A".
- [22] IEC 61000-3-11 (2000): "Electromagnetic compatibility (EMC) - Part 3-11: Limits – Limitation of voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current ≤ 75 A and subject to conditional connections".
- [23] IEC 61000-4-3: "Electromagnetic compatibility (EMC) - Part 4-3: Testing and measurement techniques - Radiated, radio-frequency electromagnetic field immunity test".
- [24] IEC 61000-4-2: "Electromagnetic compatibility (EMC) - Part 4-2: Testing and measurement techniques - Electrostatic discharge immunity test".
- [25] IEC 61000-4-4: "Electromagnetic compatibility (EMC) - Part 4-4: Testing and measurement techniques - Electrical fast transient/burst immunity test".
- [26] IEC 61000-4-6: "Electromagnetic compatibility (EMC) - Part 4-6: Testing and measurement techniques - Immunity to contacted disturbances, induced by radio frequency fields".

- [27] IEC 61000-4-11: "Electromagnetic compatibility (EMC) - Part 4-11: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations. Immunity tests".
- [28] IEC 61000-4-5: "Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test".
- [29] 3GPP TS 25.101: "User Equipment (UE) radio transmission and reception (FDD)".
- [30] 3GPP TS 25.102: "User Equipment (UE) radio transmission and reception (TDD)".
- [31] 3GPP TS 36.101: "Evolved Universal Terrestrial Radio Access (E-UTRA); User Equipment (UE) radio transmission and reception".
- [32] 3GPP TS 45.008: "Radio subsystem link control".
- [33] 3GPP TS 51.010-1: " Mobile Station (MS) conformance specification; Part 1: Conformance specification".
- [34] CISPR 32: "Electromagnetic compatibility of multimedia equipment - Emission requirements".
- [35] 3GPP TS 38.104: "NR; Base Station (BS) radio transmission and reception".
- [36] 3GPP TS 38.141-1: "NR; Base Station (BS) conformance testing; Part 1: Conducted conformance testing".
- [37] 3GPP TS 38.141-2: "NR; Base Station (BS) conformance testing; Part 2: Radiated conformance testing".
- [38] 3GPP TS 38.101-4: "NR; User Equipment (UE) radio transmission and reception; Part 4: Performance requirements".
- [39] 3GPP TS 37.114: "Active Antenna System (AAS) Base Station (BS), Electromagnetic Compatibility (EMC)".
- [40] IEC 61000-4-21: "Electromagnetic Compatibility (EMC) Part 4-21: Testing And Measurement Techniques Reverberation Chamber Test Methods".
- [41] IEC 61000-6-8: 2020: "Electromagnetic compatibility (EMC) - Part 6-8: Generic standards - Emission standard for professional equipment in commercial and light-industrial locations".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in TR 21.905 [1].

Ancillary equipment: Equipment (apparatus), used in connection with a receiver, transmitter or transceiver is considered as an ancillary equipment (apparatus) if:

- the equipment is intended for use in conjunction with a receiver, transmitter or transceiver to provide additional operational and/or control features to the radio equipment, (e.g. to extend control to another position or location); and
- the equipment cannot be used on a stand-alone basis to provide user functions independently of a receiver, transmitter or transceiver; and
- the receiver, transmitter or transceiver to which it is connected, is capable of providing some intended operation such as transmitting and/or receiving without the ancillary equipment (i.e. it is not a sub-unit of the main equipment essential to the main equipment basic functions).

antenna connector: connector at the conducted interface of the *BS type 1-C*

Band category: group of operating bands for which the same MSR scenarios apply

Base Station equipment: Radio and/or ancillary equipment intended for operation at a fixed location and powered directly or indirectly (e.g. via an AC/DC converter or power supply) by AC mains network, or an extended local DC mains network.

Base Station RF bandwidth: The bandwidth in which a Base Station transmits and/or receives multiple carriers and/or RATs simultaneously.

Base Station RF bandwidth edge: The frequency of one of the edges of the Base Station RF bandwidth.

BS type 1-C: NR base station operating at FR1 with requirements set consisting only of conducted requirements defined at individual *antenna connectors*.

Channel bandwidth: The RF bandwidth supporting a single E-UTRA RF carrier with the transmission bandwidth configured in the uplink or downlink of a cell. The channel bandwidth is measured in MHz and is used as a reference for transmitter and receiver RF requirements.

Continuous phenomena (continuous disturbance): Electromagnetic disturbance, the effects of which on a particular device or equipment cannot be resolved into a succession of distinct effects (IEC 60050-161 [14]).

Lower RF bandwidth edge: The frequency of the lower edge of the Base Station RF bandwidth, used as a frequency reference point for transmitter and receiver requirements.

Maximum Base Station RF bandwidth: The maximum RF bandwidth supported by a BS within an operating band.

Maximum throughput: The maximum achievable throughput for a reference measurement channel.

MB-MSR Base Station: MSR Base Station characterized by the ability of its transmitter and/or receiver to process two or more carriers in common active RF components simultaneously, where at least one carrier is configured at a different non-overlapping operating band than the other carrier(s).

MSR Base station: Base Station characterized by the ability of its receiver and transmitter to process two or more carriers in common active RF components simultaneously in a declared RF bandwidth, where at least one carrier is of a different RAT than the other carrier(s).

NOTE: A Base Station where receiver or transmitter processes carriers of different RATs simultaneously, but not through common active RF components, is not an MSR BS according to the above definition. Such a BS is in the present specification referred to as "other BS supporting more than one RAT".

NB-IoT In-band operation: NB-IoT is operating in-band when it utilizes the resource block(s) within a normal E-UTRA carrier.

NB-IoT guard band operation: NB-IoT is operating in guard band when it utilizes the unused resource block(s) within an E-UTRA carrier's guard-band.

NB-IoT standalone operation: NB-IoT is operating standalone when it utilizes its own spectrum, for example the spectrum currently being used by GERAN systems as a replacement of one or more GSM carriers, as well as scattered spectrum for potential IoT deployment.

Radio communications equipment: Telecommunications equipment which includes one or more transmitters and/or receivers and/or parts thereof for use in a fixed, mobile or portable application. It can be operated with ancillary equipment but if so, is not dependent on it for basic functionality.

Radio equipment: Equipment which contains Radio digital unit and Radio unit.

Radio digital unit: Equipment which contains base band and functionality for controlling Radio unit.

Radio unit: Equipment which contains transmitter and/or receiver.

Port: A particular interface, of the specified equipment (apparatus), with the electromagnetic environment. For example, any connection point on an equipment intended for connection of cables to or from that equipment is considered as a port (see figure 3.1.1).

Receiver exclusion band: The receiver exclusion band is the band of frequencies over which no tests of radiated immunity of a receiver are made. The exclusion band for receivers is expressed relative to the base station receive band.

Signal and control port: Port which carries information or control signals, excluding antenna ports.

Telecommunication port: Ports which are intended to be connected to telecommunication networks (e.g. public switched telecommunication networks, integrated services digital networks), local area networks (e.g. Ethernet, Token Ring) and similar networks.

NOTE: *Telecommunication port* is called "wired network port" in CISPR 32 [34].

Throughput: The number of payload bits successfully received per second for a reference measurement channel in a specified reference condition.

Transient phenomena: Pertaining to or designating a phenomena or a quantity which varies between two consecutive steady states during a time interval short compared with the time-scale of interest (IEC 60050-161 [14]).

Transmitter exclusion band: The transmitter exclusion band is the band of frequencies over which no tests of radiated immunity of a transmitter are made. The exclusion band for transmitters is expressed relative to the carrier frequencies used (the carrier frequencies of the base stations activated transmitter(s)).

Upper RF bandwidth edge: The frequency of the upper edge of the Base Station RF bandwidth, used as a frequency reference point for transmitter and receiver requirements.

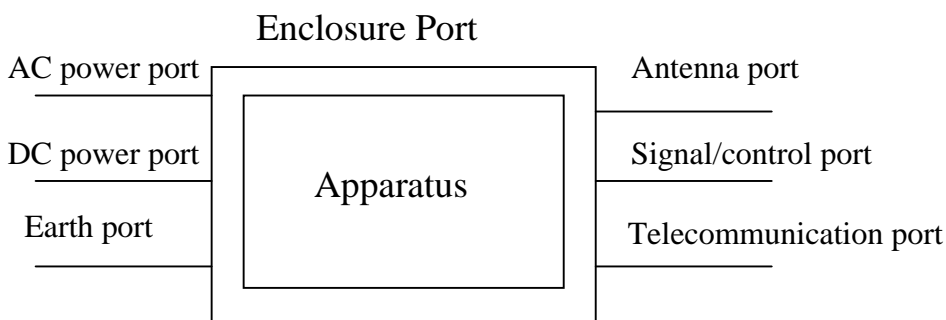


Figure 3.1-1: Examples of ports

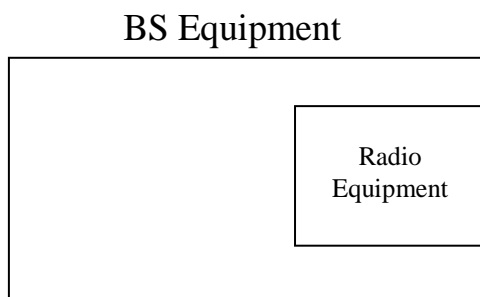


Figure 3.1-2: BS with single enclosure solution

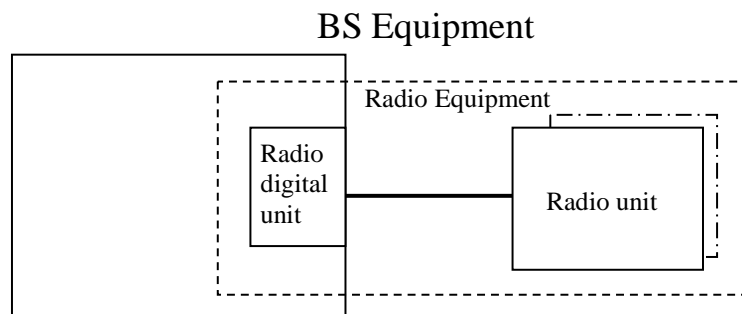


Figure 3.1-3: BS with multiple enclosure solution

3.2 Symbols

For the purposes of the present document, the following symbols apply:

BW_{Channel}	Channel bandwidth
$F_{C,\text{high}}$	Center frequency of the highest transmitted/received carrier.
$F_{C,\text{low}}$	Center frequency of the lowest transmitted/received carrier.
$F_{DL,\text{high}}$	The highest frequency of the downlink operating band
$F_{DL,\text{low}}$	The lowest frequency of the downlink operating band
f_{offset}	Frequency offset used for discovering narrowband response for receivers
$F_{\text{offset, RAT}}$	Frequency offset from $F_{C,\text{high}}$ to the <i>upper RF bandwidth edge</i> or $F_{C,\text{low}}$ to the <i>lower RF bandwidth edge</i> for a specific RAT
$F_{UL,\text{high}}$	The highest frequency of the uplink operating band
$F_{UL,\text{low}}$	The lowest frequency of the uplink operating band
Δf_{OBUE}	Maximum offset of the operating band unwanted emissions mask from the operating band edge
Δf_{OOB}	Maximum offset of the out-of-band boundary from the uplink operating band edge

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in TR 21.905 [1].

AC	Alternating Current
AMN	Artificial Mains Network
ARFCN	Absolute Radio Frequency Channel Number
BC	Band Category
BER	Bit Error Ratio
BLER	Block Error Ratio
CDN	Coupling/Decoupling Network
CS	Capability Set
DC	Direct Current
E-UTRA	Evolved Universal Terrestrial Radio Access
EARFCN	E-UTRA Absolute Radio Frequency Channel Number
EMC	Electromagnetic Compatibility
EPC	Evolved Packet Core
ESD	Electrostatic discharge
EUT	Equipment Under Test
FR	Frequency Range
FRC	Fixed Reference Channel
MB-MSR	Multi-Band Multi-Standard Radio
MSR	Multi-Standard Radio
NB-IoT	Narrowband – Internet of Things
NR	New Radio
NR-ARFCN	NR Absolute Radio Frequency Channel Number

NTC	Test Configuration for Non-contiguous operation
RAT	Radio Access Technology
RF	Radio frequency
rms	root mean square
TC	Test Configuration
UARFCN	UTRA Absolute Radio Frequency Channel Number
UTRA	Universal Terrestrial Radio Access

4 Test conditions

4.1 General

The equipment shall be tested in normal test environment defined in base station conformance testing specification TS 37.141 [11]. The test conditions shall be recorded in the test report.

For a EUT which contains more than one BS, it is sufficient to perform tests relating to each type of port of each representative type of the BS forming part of the EUT. For an MSR BS or other BS supporting more than one RAT, tests shall be performed with RATs activated according to the test configuration in subclause 4.5. Tests shall be performed relating to each type of port, and need not be repeated for each RAT if operating RATs are assessed simultaneously during the test. For other BS supporting more than one RAT however (other than MSR BS), tests relating to the antenna port(s) shall always be performed for each supported RAT.

For BS capable of multi-band operation, the requirements in the present document apply for each supported operating band unless otherwise stated. Operating bands and RATs shall be activated according to the test configuration in subclause 4.5. Tests shall be performed relating to each type of port and all RATs per band shall be assessed during the tests.

The manufacturer shall declare the supported operating band(s) according to subclause 4.4 of TS 37.141 [11]. Requirements apply only for the declared operating band and corresponding Band Category.

The manufacturer shall declare the supported capability set(s) according to subclause 4.7 of TS 37.141 [11]. Tests performed on a Base Station according to a declared Capability Set cover all single RAT and multi-RAT configurations included in the declared Capability Set. Exception can be made for immunity testing based on declaration DEMC.2 and DEMC.4 (see table 4.6-1), as detailed in Annex B.

4.2 Arrangements for establishing a communication link

The wanted RF signal nominal frequency shall be selected by setting the channel number according to the following:

- The NR Absolute Radio Frequency Channel Number (NR-ARFCN) for NR carrier,
- The Absolute Radio Frequency Channel Number (EARFCN) for E-UTRA carrier,
- The Absolute Radio Frequency Channel Number (UARFCN) for UTRA carrier,
- The Absolute Radio Frequency Channel Number (ARFCN) for GSM/EDGE carrier,
- NB-IoT Narrowband – Internet of Things

A communication link shall be set up with a suitable test system capable of evaluating the required performance criteria (hereafter called "the test system") at the radio interface and telecommunication port/ports (the S1/Iub/Abis interface). The test system shall be located outside of the test environment.

When the EUT is required to be in the transmit/receive mode, the following conditions shall be met:

- The EUT shall be commanded to operate at maximum rated transmit power;
- Adequate measures shall be taken to avoid the effect of the unwanted signal on the measuring equipment;
- The wanted RF input signal level shall be set to a level where the performance is not limited by the receiver noise floor or strong signal effects.

NOTE: 15 dB above the reference sensitivity level has been used as an example of the wanted input signal level in UTRA TDD, UTRA FDD, E-UTRA or NB-IoT EMC specifications for establishing a stable communication link. The RAT-specific reference sensitivity levels are specified in:

- TS 25.142 [8] for UTRA TDD,
 - TS 25.141 [7] for UTRA FDD,
 - TS 36.141 [9] for E-UTRA or for NB-IoT,
 - TS 38.141-1 [36] for NR.
- For GSM/EDGE the wanted receiver input signal level shall be set to a nominal value of -47 dBm.

For immunity tests subclause 4.3 shall additionally apply.

4.2.1 Multiple enclosure BS solution

For a BS with multiple enclosures, the BS part with Radio digital unit and the Radio unit may be tested separately. Communication link shall be set up in the same way as if they are in single BS enclosure. The Radio Digital unit and the Radio unit shall communicate over an interface enabling establishment of a communication link.

4.3 Narrow band responses on receivers

Responses on receivers or duplex transceivers occurring during the immunity test at discrete frequencies which are narrow band responses (spurious responses), are identified by the following method:

- if during an immunity test the quantity being monitored goes outside the specified tolerances (clause 6), it is necessary to establish whether the deviation is due to a narrow band response or to a wide band (EMC) phenomenon. Therefore, the test shall be repeated with the unwanted signal frequency first increased, and then decreased by an offset f_{offset} , where:
 - For E-UTRA or for NR, $f_{\text{offset}} = 2 \times \text{BW}_{\text{Channel}}$, where $\text{BW}_{\text{Channel}}$ is the channel bandwidth as defined in TS 36.104 [9] for E-UTRA, or in TS 38.104 [35] for NR;
 - For UTRA, $f_{\text{offset}} = 10 \text{ MHz}$
 - For GSM/EDGE, $f_{\text{offset}} = 400 \text{ kHz}$
 - For NB-IoT, $f_{\text{offset}} = 400 \text{ kHz}$
- if the deviation disappears in either or both of the above offset cases, then the response is considered as a narrow band response;
- if the deviation does not disappear, this may be due to the fact that the offset has made the frequency of the unwanted signal correspond to the frequency of another narrow band response. Under these circumstances the procedure is repeated with the increase and decrease of the frequency of the unwanted signal set to $1.25 \times f_{\text{offset}}$;
- if the deviation does not disappear with the increased and/or decreased frequency, the phenomenon is considered wide band and therefore an EMC problem and the equipment fails the test.

Narrow band responses are disregarded.

For an MSR BS or other BS supporting more than one RAT, the method above shall be applied for each tested RAT. For BS capable of multi-band operation, all supported operating bands shall be considered for narrowband responses.

4.4 Exclusion bands

An exclusion band is a band of frequencies over which no tests of radiated immunity are made.

4.4.1 Transmitter exclusion band

For testing of radiated immunity there shall be no transmitter exclusion band.

4.4.2 Receiver exclusion band

The receiver exclusion band for Base Stations is the band of frequencies over which no tests of radiated immunity of a receiver are made.

The range of the exclusion band shall be:

$$F_{UL_low} - \Delta f_{OOB} < f < F_{UL_high} + \Delta f_{OOB}$$

Where:

The value of F_{UL_low} and F_{UL_high} are defined for each operating band for NR, E-UTRA, UTRA and GSM/EDGE in TS 37.104 [6].

The values of Δf_{OOB} are defined in table 4.4.2-1.

Table 4.4.2-1: Maximum Δf_{OOB} offset outside the uplink operating band

Operating band characteristics	Δf_{OOB} (MHz)
$200 \text{ MHz} \geq F_{UL_high} - F_{UL_low}$	20
$200 \text{ MHz} < F_{UL_high} - F_{UL_low} \leq 900 \text{ MHz}$	60

For BS capable of multi-band operation, the total receiver exclusion band shall be the combination of the exclusion bands for each operating band supported by the BS.

Table 4.4-2: Void

Table 4.4-3: Void

4.5 BS test configurations

The present clause defines the BS test configurations that shall be used for demonstrating conformance. This is specified in table 4.5-1, 4.5-1a, 4.5-1b, and 4.5-1c for multi-RAT capable MSR Base Stations, in table 4.5-2 for single-RAT capable BS and in table 4.5-3 for multi-band capable BS. For other BS supporting more than one RAT (other than MSR BS), table 4.5-2 applies separately for each RAT supported.

The test configurations apply according to the declared RAT Capability Set (CS) of the MSR Base Station according to clause 4.7 of TS 37.141 [11] and the Band Category of the declared operating band (BC1, BC2 or BC3), as listed in the heading of each table.

The test configurations (TCx) are defined in TS 37.141 [11], clause 4.8.

For a BS declared to be capable of contiguous operation only, the test configuration(s) in tables 4.5-1 and 4.5-2 denoted by a "C" shall be used for testing.

For a BS declared to be capable of contiguous and non-contiguous operation and where the parameters in the manufacture's declaration according to clause 4.7.2 of TS 37.141 [11] are identical for contiguous and non-contiguous operation, the test configurations denoted by "CNC" shall be used.

For a BS declared to be capable of contiguous and non-contiguous operation and where the parameters in the manufacture's declaration according to clause 4.7.2 of TS 37.141 [11] are not identical for contiguous and non-contiguous operation, the test configurations denoted by "C/NC" shall be used for testing.

For a BS declared to support NB-IoT operating in-band, the test configuration(s) in table 4.5-1 and 4.5-2 denoted by "NI" shall be used for testing.

For a BS declared to support NB-IoT operating in guard band, the test configuration(s) in table 4.5-1 and 4.5-2 denoted by "NG" shall be used for testing.

For a BS declared to support NB-IoT operating in guard band and in-band, the test configuration(s) in table 4.5-1 and 4.5-2 denoted by "NG" or/and "NI" shall be used for testing.

For a BS declared to support NB-IoT standalone, the test configuration(s) in table 4.5-1a, 4.5-1b and 4.5-2 and entries that refer to single-RAT specifications shall be used for testing.

For a MSR BS where signals from supported RATs are processed in common active components (see DEMC.2 and DEMC.4 in table 4.6-1), it is sufficient to consider a reduced set of CSs for immunity testing, as described in Annex B.

For immunity tests:

- The communication link for the RAT(s) listed in the table shall be established according to clause 4.2.
- Tests for ports relating to the RAT(s) supported shall be performed according to clause 4.1.

Table 4.5-1: Test configurations for single-band Multi-RAT capable MSR BS (CS3-7)

Capability Set	UTRA + E-UTRA. NB-IoT in-band, NB-IoT guard band (Note 2, Note 3) (CS 3)			GSM+ UTRA (CS 4)	GSM + E-UTRA, NB-IoT in-band, NB-IoT guard band (Note 2, Note 3) (CS 5)	GSM + UTRA + E- UTRA, (CS 6)	GSM+UTRA/ E-UTRA, UTRA+ E-UTRA, NB-IoT in-band, NB-IoT guard band (Note 2, Note 3) (CS7)
	BS test case	BC1	BC2	BC3	BC2	BC2	BC2
Emission tests	C: TC3a CNC: NTC3 C/NC: TC3a and NTC3 NI: TC16 NG: TC19	C: TC3a CNC: NTC3 C/NC: TC3a and NTC3 NI: TC16 NG: TC19	C: TC3b NI: TC16 NG: TC19	C: TC4a CNC: NTC4a C/NC: TC4a and NTC4a	C: TC4b CNC: NTC4b C/NC: TC4b and NTC4b NI: TC15 NG: TC18	C: TC4c CNC: NTC4c C/NC: TC4c and NTC4c	C: (TC4a, TC3a) (Note 4), TC4b CNC: (NTC4a, NTC3) (Note 4), NTC4b C/NC: (TC4a, NTC4a, TC3a, NTC3) (Note 4), TC4b, NTC4b NI: TC15, (TC16) (Note 4) NG: TC18, (TC19) (Note 4)
Immunity tests	C: TC3a CNC: NTC3 C/NC: TC3a, NTC3 NI: TC16 NG: TC19	C: TC3a CNC: NTC3 C/NC: TC3a, NTC3 NI: TC16 NG: TC19	C: TC3b NI: TC16 NG: TC19	C: TC5a CNC: NTC5a C/NC: TC5a, NTC5a	C: TC5b CNC: NTC5b C/NC: TC5b, NTC5b NI: TC15 NG: TC18	C: TC5b CNC: NTC5c, C/NC: TC5b, NTC5c	C: TC5b CNC: NTC5b C/NC: TC5b, NTC5b NI: TC15 NG: TC18
NOTE 1: Void							
NOTE 2: The support of NB-IoT in-band operation is optional and declared by the manufacturer. If not supported, the test configurations denoted by "NI" shall not be used for testing.							
NOTE 3: The support of NB-IoT guard band operation is optional and declared by the manufacturer. If not supported, the test configurations denoted by "NG" shall not be used for testing.							
NOTE 4: For Band 3, the test configuration is only applicable if UTRA is declared to be supported in Band 3.							

Table 4.5-1a: Test configurations for single-band Multi-RAT capable MSR BS (CS9-13)

Capability Set	GSM+NB-IoT standalone (CS 9)	UTRA + NB-IoT standalone (CS 10)		E-UTRA + NB-IoT standalone (CS 11)			GSM+UTRA+NB-IoT standalone (CS 12)	GSM+ E-UTRA+NB-IoT standalone (CS 13)
BS test case	BC2	BC1	BC2	BC1	BC2	BC3	BC2	BC2
Emission tests	TC9	TC10	TC10	TC11	TC11	TC11	TC12	TC13
Immunity tests	TC9	TC10	TC10	TC11	TC11	TC11	TC12	TC13

Table 4.5-1b: Test configurations for single-band Multi-RAT capable MSR BS (CS14-17)

Capability Set	UTRA + E-UTRA + NB-IoT standalone (CS 14)			GSM + UTRA + E-UTRA + NB-IoT standalone (CS 15)	NR + E-UTRA NB-IoT in-band(Note2) NB-IoT guard band(Note3) (CS 16)		NR + NB-IoT standalone + E-UTRA NB-IoT in-band(Note2) NB-IoT guard band(Note3) (CS 17)	
BS test case	BC1	BC2	BC3	BC2	BC1 and BC2	BC3	BC1 and BC2	BC3
Emission tests	TC14	TC14	TC14	TC13, (TC12, TC13) (NOTE4)	C, NI, NG: TC21 CNC, NCNI, NCNG: NTC21 C/NC, C/NCNI, C/NCNG: NTC21, TC21	C, NI, NG: TC21 CNC, NCNI, NCNG: NTC21 C/NC, C/NCNI, C/NCNG: NTC21, TC21	C: TC22 NI: TC22 NG: TC22	C: TC22 NI: TC22 NG: TC22
Immunity tests	TC14	TC14	TC14	TC13	C, NI, NG: TC21 CNC, NCNI, NCNG: NTC21 C/NC, C/NCNI, C/NCNG: NTC21, TC21	C, NI, NG: TC21 CNC, NCNI, NCNG: NTC21 C/NC, C/NCNI, C/NCNG: NTC21, TC21	C: TC22 NI: TC22 NG: TC22	C: TC22 NI: TC22 NG: TC22
NOTE 1: Void								
NOTE 2: The support of NB-IoT in-band operation is optional and declared by the manufacturer. If not supported, the test configurations denoted by "NI" shall not be used for testing.								
NOTE 3: The support of NB-IoT guard band operation is optional and declared by the manufacturer. If not supported, the test configurations denoted by "NG" shall not be used for testing.								
NOTE 4: For Band 3, the test configuration is only applicable if UTRA is declared to be supported in Band 3.								

Table 4.5-1c: Test configurations for single-band Multi-RAT capable MSR BS (CS18-19)

Capability Set	GSM + NR + E-UTRA NB-IoT in-band (NOTE 2) NB-IoT guard band (NOTE3) (CS 18)	UTRA + NR + E-UTRA NB-IoT in-band (NOTE 2) NB-IoT guard band (NOTE 3) (CS19)
BS test case	BC2	BC2
Emission tests	C, NI, NG: TC21a CNC, NCNI, NCNG: NTC21a C/NC, C/NCNI, C/NCNG: NTC21a, TC21a	C, NI, NG: TC21b CNC, NCNI, NCNG: NTC21b C/NC, C/NCNI, C/NCNG: NTC21b, TC21b
Immunity tests	C, NI, NG: TC21a CNC, NCNI, NCNG: NTC21a C/NC, C/NCNI, C/NCNG: NTC21a, TC21a	C, NI, NG: TC21b CNC, NCNI, NCNG: NTC21b C/NC, C/NCNI, C/NCNG: NTC21b, TC21b
NOTE 1: Void NOTE 2: The support of NB-IoT in-band operation is optional and declared by the manufacturer. If not supported, the test configurations denoted by "NI" shall not be used for testing. NOTE 3: The support of NB-IoT guard band operation is optional and declared by the manufacturer. If not supported, the test configurations denoted by "NG" shall not be used for testing.		

Table 4.5-2: Test configurations for single-band Single-RAT multi-carrier capable BS

Capability Set	UTRA (MC) capable BS (CS1)			E-UTRA (MC) capable BS (CS2) NB-IoT in-band, NB-IoT guard band (Note 2, Note 3)			NB-IoT (MC) capable BS (CS8)		
	BC1	BC2	BC3	BC1	BC2	BC3	BC1	BC2	BC3
Emission tests	C: TC1a CNC: NTC1a C/NC: TC1a and NTC1a	C: TC1a CNC: NTC1a C/NC: TC1a and NTC1a	C: TC1b	C: TC2 CNC: NTC2 C/NC: TC2 and NTC2 NI: TC17 NG: TC20	C: TC2 CNC: NTC2 C/NC: TC2 and NTC2 NI: TC17 NG: TC20	C: TC2 CNC: NTC2 C/NC: TC2 and NTC2 NI: TC17 NG: TC20	TC8	TC8	TC8
Immunity tests	C: TC1a CNC: NTC1a C/NC: TC1a, NTC1a	C: TC1a CNC: NTC1a C/NC: TC1a, NTC1a	C: TC1b	C: TC2 CNC: NTC2 C/NC: TC2, NTC2 NI: TC17 NG: TC20	C: TC2 CNC: NTC2 C/NC: TC2, NTC2 NI: TC17 NG: TC20	C: TC2 CNC: NTC2 C/NC: TC2, NTC2 NI: TC17 NG: TC20	TC8	TC8	TC8
NOTE 1: Void NOTE 2: The support of NB-IoT in-band operation is optional and declared by the manufacturer. If not supported, the test configurations denoted by "NI" shall not be used for testing. NOTE 3: The support of NB-IoT guard band operation is optional and declared by the manufacturer. If not supported, the test configurations denoted by "NG" shall not be used for testing.									

Table 4.5-3: Test configurations for multi-band capable BS (CS1-CS7, CS16 and CS18-CS19)

Capability Set	Multi-band testing	
BS test case	BC1/BC2	BC3
Emission tests	TC7b	TC7b
Immunity tests	TC7b	TC7b

4.6 Manufacturer declarations

The following EMC-specific manufacturer's declarations listed in table 4.6-1 are required, except as noted, to be provided by the manufacturer for MSR BS requirements testing.

NOTE: The below listed manufacturer's declarations are supplementary to declarations covered in TS 37.141 [11].

Table 4.6-1: EMC-specific manufacturer declarations

Declaration identifier	Declaration	Description
DEMC.1 (NOTE 1)	Declaration of ports intended to be used with cables less than 3 m	Declaration of any ports intended to be used with cables less than 3 m.
DEMC.2	Common and/or RAT-specific active RF components	Declaration of common and/or RAT-specific active RF components and other HW blocks for a communication link in MSR BS or other BS supporting more than one RAT.
DEMC.3	Common and/or band-specific active RF components	Declaration of common and/or band-specific active RF components and other HW blocks for a communication link in BS capable of multi-band operation.
DEMC.4 (NOTE 1)	RAT dependencies for simplified immunity testing	Declaration of RAT dependencies for simplified immunity testing. For the case where BS employs common active RF components (DEMC.2), declare RATs which are handled per operating band in common active components in the radio digital unit. Declared per supported operating band (in case supported by multiple RATs).

NOTE 1: This manufacturer declaration is optional.

5 Performance assessment

5.1 General

The following information shall be recorded in or annexed to the test report:

- the primary functions of the radio equipment to be tested during and after the EMC testing;
- the intended functions of the radio equipment which shall be in accordance with the documentation accompanying the equipment;
- the method to be used to verify that a communications link is established and maintained;
- the user-control functions and stored data that are required for normal operation and the method to be used to assess whether these have been lost after EMC stress;
- the ancillary equipment to be combined with the radio equipment for testing (where applicable);
- the information about ancillary equipment intended to be used with the radio equipment;
- information about the common and/or RAT-specific active RF components and other HW blocks for a communication link in MSR BS or other BS supporting more than one RAT (see declaration DEMC.2);
- information about the common and/or band-specific active RF components and other HW blocks for a communication link in BS capable of multi-band operation (see declaration DEMC.3);
- an exhaustive list of ports, classified as either power or signal/control. Power ports shall further be classified as AC or DC power.

Performance assessment of a BS with multiple enclosures may be done separately for the BS part with the Radio digital unit and the Radio unit respectively, according to the manufacturer's choice.

A communication link used by more than one tested RAT or more than one tested operating band, shall be assessed on all tested RATs and operating bands. Communication link(s) and/or radio performance parameters for the RATs and operating bands can during the test be assessed simultaneously or separately for each RAT and band, depending on the test environment capability.

5.2 Assessment of performance in Downlink

In the immunity tests, the output of the transmitter shall be connected to equipment which meets the requirements for the performance assessment of RAT and bearer used in the immunity tests according to the following:

- Throughput assessment in TS 38.101-4 [38] in case of NR
- Throughput assessment in TS 36.101 [31] in case of E-UTRA
- BLER assessment in TS 25.101 [29] in case of UTRA FDD
- BLER assessment in TS 25.102 [30] in case of UTRA TDD
- BER assessment in annex A.1 in case of GSM/EDGE
- Throughput assessment in TS 36.101 [31] in case of NB-IoT

Power control shall be OFF during the immunity testing.

5.3 Assessment of performance in Uplink

In the immunity tests, the performance in the uplink shall be monitored at a telecommunications port(s) by using suitable test equipment according to the following:

- The value of the throughput shall be monitored in case of E-UTRA, and/or in case of NR
- The value of the BLER shall be monitored in case of UTRA FDD and UTRA TDD
- The value of the BER shall be monitored in case of GSM/EDGE (see annex A.2)
- The value of the throughput shall be monitored in case of NB-IoT

5.4 Ancillary equipment

At the manufacturer's discretion the test may be performed on the ancillary equipment separately or on a representative configuration of the combination of radio and ancillary equipment. In each case EUT is tested against all applicable immunity and emission clauses of the present document and in each case, compliance enables the ancillary equipment to be used with different radio equipment.

6 Performance criteria

The test should, where possible, be performed using a bearer with the characteristics of data rate and performance criteria defined for NR, E-UTRA, UTRA, GSM/EDGE and NB-IoT below. If the test is not performed using one of these bearers (for example, if none of them are supported by the BS) the characteristics of the bearer used shall be recorded in the test report.

6.1 Performance criteria for continuous phenomena for BS

6.1.1 E-UTRA performance criteria

The throughput in table 6.1.1-1 is stated relative to the maximum throughput of the FRC. The maximum throughput for an FRC is equal to the payload size * the number of uplink subframes per second.

The BS Uplink and Downlink paths shall each meet the performance criteria defined in table 6.1.1-1 during the test. If the Uplink and Downlink paths are evaluated as a one loop then the criteria is two times the throughput reduction shown in table 6.1.1-1. After each test case BS shall operate as intended with no loss of user control function, stored data and the communication link shall be maintained.

Table 6.1.1-1: E-UTRA BS Performance criteria for continuous phenomena for BS

E-UTRA channel bandwidth (MHz)	Bearer information data rate (as in Annex A.1 in TS 36.104 [4])	Performance criteria (Note 1, Note 2)
1.4	FRC A1-1	Throughput > 95 % No loss of service
3	FRC A1-2	
3	FRC A1-6 for E-UTRA with NB-IoT in-band operation	
5	FRC A1-3	
5	FRC A1-7 for E-UTRA with NB-IoT in-band operation	
10	FRC A1-3 (Note 3)	
10	FRC A1-7 for E-UTRA with NB-IoT in-band operation	
15	FRC A1-3 (Note 3)	
15	FRC A1-7 for E-UTRA with NB-IoT in-band operation	
20	FRC A1-3 (Note 3)	
20	FRC A1-7 for E-UTRA with NB-IoT in-band operation	

NOTE 1: The performance criteria, "Throughput > 95 % / No loss of service", applies also if a bearer with another characteristics is used in the test.

NOTE 2: The performance criteria, "Throughput > 90 % / No loss of service", applies instead if the Uplink and Downlink paths are evaluated as a one loop.

NOTE 3: This is the information data rate of a single instance of the bearer mapped to 25 resource blocks. The performance criteria shall be met for each consecutive application of a single instance of the bearer mapped to disjoint frequency ranges with a width of 25 resource blocks each.

6.1.2 UTRA performance criteria

The BS Uplink and Downlink paths shall each meet the performance criteria defined in table 6.1.2-1 during the test. If the Uplink and Downlink paths are evaluated as a one loop, then the criterion is two times the value shown in table 6.1.2-1. After each test case BS shall operate as intended with no loss of user control function, stored data and the communication link shall be maintained.

Table 6.1.2-1: UTRA BS performance criteria for continuous phenomena for BS

Bearer information data rate	Performance criteria
12.2 kbps	BLER < 10 ⁻² No loss of service
64 kbps	
144 kbps	
384 kbps	

NOTE: The performance criteria, "BLER < 10⁻² / No loss of service", applies also if a bearer with another characteristics is used in the test.

6.1.3 GSM/EDGE performance criteria

6.1.3.1 GSM/EDGE downlink

The BER of the downlink shall be assessed during the test according to one of the test methods of Annex A.1.

If the test method of Annex A.1.1 is used, the measured BER of the class 2 bits of TCH/FS shall not exceed 1,6 % during the test.

NOTE: This BER is the upper limit in TS 45.008 [32] for RXQUAL = 3.

If the test method of Annex A.1.2 is used, the value of RXQUAL shall not exceed 3 during the test.

At the conclusion of the test the EUT shall operate as intended with no loss of user control functions or stored data, and the communication link shall have been maintained.

6.1.3.2 GSM/EDGE uplink

The BER of the uplink shall be assessed during the test according to one of the test methods of Annex A.2.

If the test method of Annex A.2.1 is used, the value of RXQUAL shall not exceed 3 during the test.

If the test method of Annex A.2.2 is used, the measured BER of the class 2 bits of TCH/FS shall not exceed 1,6 % during the test.

NOTE: This BER is the upper limit in TS 45.008 [32] for RXQUAL = 3.

For a base station, the RXQUAL of the uplink shall not exceed three (3) measured during the test sequence.

At the conclusion of the test the EUT shall operate as intended with no loss of user control functions or stored data, and the communication link shall have been maintained.

6.1.4 NB-IoT performance criteria

The throughput in table 6.1.4-1 is stated relative to the maximum throughput of the FRC. The Maximum throughput for an FRC equals the Payload size / (Number of Resource Unit * time to send one Resource Unit).

The BS Uplink and Downlink paths shall each meet the performance criteria defined in table 6.1.4-1 during the test. If the Uplink and Downlink paths are evaluated as a one loop, then the criterion is two times the throughput reduction shown in table 6.1.4-1. After each test case BS shall operate as intended with no loss of user control function, stored data and the communication link shall be maintained.

Table 6.1.4-1: NB-IoT BS Performance criteria for continuous phenomena for BS

NB-IoT Sub-carrier spacing (kHz)	Reference measurement channel (as in Annex A.14 in TS 36.104 [4])	Performance criteria (Note 1, Note 2)
15	FRC A14-1	Throughput > 95 % No loss of service
3.75	FRC A14-2	

NOTE 1: The performance criteria, "Throughput > 95 % / No loss of service", applies also if a bearer with another characteristics is used in the test.

NOTE 2: The performance criteria, "Throughput > 90 % / No loss of service", applies instead if the Uplink and Downlink paths are evaluated as a one loop.

6.1.5 NR performance criteria

The throughput in table 6.1.5-1 is stated relative to the maximum throughput of the FRC. The maximum throughput for an FRC is as defined in TS 38.104 [35], annex A.1.

The BS Uplink and Downlink paths shall each meet the performance criteria defined in table 6.1.5-1 during the test. If the Uplink and Downlink paths are evaluated as a one loop, then the criterion is two times the throughput reduction shown in table 6.1.5-1. After each test case BS shall operate as intended with no loss of user control function, stored data and the communication link shall be maintained.

Table 6.1.5-1: NR BS performance criteria for continuous phenomena for BS

NR channel bandwidth as defined in TS 38.104 section 5.3.2-1 [35] (MHz)	Sub-carrier spacing (kHz)	Bearer information data rate (as in TS 38.104 [35], annex A.1)	Performance criteria (Note1, Note 2)
3	15	G-FR1-A1-7	Throughput > 95 %, No loss of service
		G-FR1-A1-21 for NR with NB-IoT in-band operation	
5 to 15	15	G-FR1-A1-1	
		G-FR1-A1-10 for NR with NB-IoT in-band operation	
10, 15	30	G-FR1-A1-2	
10, 15	60	G-FR1-A1-3	
20 to 50	15	G-FR1-A1-4	
		G-FR1-A1-11 for NR with NB-IoT in-band operation	
20 to 100	30	G-FR1-A1-5	
20 to 100	60	G-FR1-A1-6	

NOTE 1: The performance criteria, throughput > 95 %, no loss of service, applies also if a bearer with another characteristics is used in the test.
NOTE 2: The performance criteria, throughput > 90 %, no loss of service, applies instead if the uplink and downlink paths are evaluated as a one loop.

6.2 Performance criteria for transient phenomena for BS

At the conclusion of the total test comprising the series of individual exposures the EUT shall operate as intended with no loss of user control functions or stored data, as specified by the manufacturer, and the communication link shall have been maintained.

The below characteristics should be chosen based on manufacture declaration as defined in related single RAT BS RF testing specification, and are defined as:

The below characteristics should be chosen based on manufacture declaration and are defined as:

- The E-UTRA channel bandwidth and bearer information data rate are defined in table 6.1.1-1, based on declaration defined in TS 36.141 [9].
- The UTRA bearer information data rate are defined in table 6.1.2-1, based on declaration defined in TS 25.141 [7].
- The GSM/EDGE the test BER assessment are defined in clause 6.1.3.1 for downlink and clause 6.1.3.2 for uplink, while the criteria is defined in clause 6.2, based on declaration defined in TS 51.021 [10].
- The NB-IoT sub-carrier spacing and reference measurement channel are defined in table 6.1.4-1, based on declaration defined in TS 36.141 [9].
- The NR channel bandwidth, sub-carrier spacing and bearer information data rate are defined in table 6.1.5-1, based on declaration defined in TS 38.141-1 [36], and/or TS 38.141-2 [37].

6.3 Performance criteria for continuous phenomena for Ancillary equipment

The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below the performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible performance loss. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

6.4 Performance criteria for transient phenomena for Ancillary equipment

The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below the performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible performance loss. During the test, degradation of performance is however allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the apparatus if used as intended.

7 Applicability overview

7.1 Emission

Table 7.1-1: Emission applicability

Phenomenon	Application	Equipment test requirement		Reference subclause in the present document	Reference standard
		BS equipment	Ancillary equipment		
Radiated emission (NOTE)	Enclosure	applicable		8.2.1	ITU-R SM.329 [15]
Radiated emission	Enclosure		applicable	8.2.2	CISPR 32 [34]
Conducted emission	DC power input/output port	applicable	applicable	8.3	CISPR 32 [34]
Conducted emission	AC mains input/output port	applicable	applicable	8.4	CISPR 32 [34]
Harmonic current emissions	AC mains input port	applicable	applicable	8.5	IEC 61000-3-2 [19] or IEC 61000-3-12 [20]
Voltage fluctuations and flicker	AC mains input port	applicable	applicable	8.6	IEC 61000-3-3 [21] or IEC 61000-3-11 [22]
Conducted emission	Telecommunication port	applicable	applicable	8.7	CISPR 32 [34]

NOTE: The radiated emissions requirement for the BS equipment covers radiated emissions in the spurious domain. For GSM/EDGE, it corresponds to the "Radiated spurious emissions" requirement in TS 51.021 [10] for radio aspects.

7.2 Immunity

Table 7.2-1: Immunity applicability

Phenomenon	Application	Equipment test requirement		Reference subclause in the present document	Reference Standard
		BS equipment	Ancillary equipment		
RF electromagnetic field (80 - 6000 MHz)	Enclosure	applicable	applicable	9.2	IEC 61000-4-3 [23]
Electrostatic discharge	Enclosure	applicable	applicable	9.3	IEC 61000-4-2 [24]
Fast transients common mode	Signal, telecommunications and control ports, DC and AC power input ports	applicable	applicable	9.4	IEC 61000-4-4 [25]
RF common mode 0,15 - 80 MHz	Signal, telecommunications and control ports, DC and AC power input ports	applicable	applicable	9.5	IEC 61000-4-6 [26]
Voltage dips and interruptions	AC mains power input ports	applicable	applicable	9.6	IEC 61000-4-11 [27]
Surges, common and differential mode	AC power input ports and telecommunications port	applicable	applicable	9.7	IEC 61000-4-5 [28]

8 Emission

8.1 Test configurations

This subclause defines the configurations for emission tests as follows:

- the equipment shall be tested under normal test conditions as specified in the functional standards;
- the test configuration shall be as close to normal intended use as possible;
- if the equipment is part of a system, or can be connected to ancillary equipment, then it shall be acceptable to test the equipment while connected to the minimum configuration of ancillary equipment necessary to exercise the ports;
- if the equipment has a large number of ports, then a sufficient number shall be selected to simulate actual operation conditions and to ensure that all the different types of termination are tested;
- the test conditions, test configuration and mode of operation shall be recorded in the test report;
- ports which in normal operation are connected shall be connected to an ancillary equipment or to a representative piece of cable correctly terminated to simulate the input/output characteristics of the ancillary equipment, Radio Frequency (RF) input/output ports shall be correctly terminated;
- ports which are not connected to cables during normal operation, e.g. service connectors, programming connectors, temporary connectors etc. shall not be connected to any cables for the purpose of EMC testing. Where cables have to be connected to these ports, or interconnecting cables have to be extended in length in order to exercise the EUT, precautions shall be taken to ensure that the evaluation of the EUT is not affected by the addition or extension of these cables;
- the test arrangements for transmitter and receiver clauses of the transceiver are described separately for the sake of clarity. However, where possible the test of the transmitter clause and receiver clause of the EUT may be carried out simultaneously to reduce test time.

8.2 Radiated emission from Base Station and ancillary equipment

8.2.1 Radiated emission for Base Stations

This test is applicable to BS, except for BS that are only single-RAT GSM/EDGE capable. This test shall be performed on a representative configuration of the BS.

For BS that are only single-RAT GSM/EDGE capable, the test method and limits in clause 8 of TS 51.021 [10] apply.

8.2.1.1 Definition

This test assesses the ability of BS to limit unwanted emission from the enclosure port.

8.2.1.2 Test method

- a) A test site fulfilling the requirements of ITU-R SM. 329 [15] shall be used. The BS shall be placed on a non-conducting support and shall be operated from a power source via a RF filter to avoid radiation from the power leads.

Mean power of any spurious components shall be detected by the test antenna and measuring receiver (e.g. a spectrum analyser). At each frequency at which a component is detected, the BS shall be rotated and the height of the test antenna adjusted to obtain maximum response, and the effective radiated power (e.r.p.) of that component determined by a substitution measurement. The measurement shall be repeated with the test antenna in the orthogonal polarization plane.

NOTE: Effective radiated power (e.r.p.) refers to the radiation of a half wave tuned dipole instead of an isotropic antenna. There is a constant difference of 2,15 dB between e.i.r.p. and e.r.p.

$$\text{e.r.p. (dBm)} = \text{e.i.r.p. (dBm)} - 2,15 \text{ Ref: ITU-R SM.329 ANNEX 1 [15].}$$

- b) The BS shall transmit with rated power declared by the manufacturer with all transmitters active. Set the BS to transmit a signal as stated in subclause 4.5.
- c) The received power shall be measured over the frequency range from 30 MHz to $F_{DL_low} - \Delta f_{OBUE}$ and from $F_{DL_high} + \Delta f_{OBUE}$ up to 12.75 GHz. The video bandwidth shall be approximately three times the resolution bandwidth. If this video bandwidth is not available on the measuring receiver, it shall be the maximum available and at least 1 MHz. Unless otherwise stated, all measurements are done as mean power (RMS). Δf_{OBUE} is defined in table 8.2.1.3-2.

8.2.1.3 Limits

The frequency boundary and reference bandwidths for the detailed transitions of the limits between the requirements for out of band emissions and spurious emissions are based on ITU-R Recommendations SM.329 [10] and SM.1539 [23].

The BS shall meet the limits below:

Table 8.2.1.3-1: Limits for radiated emissions from BS

Frequency range	Minimum requirement (e.r.p.)/Reference bandwidth
$30 \text{ MHz} \leq f < 1000 \text{ MHz}$	-36 dBm/ 100 kHz
$1 \text{ GHz} \leq f < 12.75 \text{ GHz}$	-30 dBm/ 1MHz
$F_{DL_low} - \Delta f_{OBUE} < f < F_{DL_high} + \Delta f_{OBUE}$ (NOTE)	Not defined
NOTE: For BS capable of multi-band operation, the frequency ranges relating to the RF bandwidths of all supported bands apply.	

Table 8.2.1.3-2: Maximum offset of OBUE outside the downlink operating band

Operating band characteristics	Δf_{OBUE} (MHz)
$F_{DL_high} - F_{DL_low} \leq 200 \text{ MHz}$	10
$200 \text{ MHz} < F_{DL_high} - F_{DL_low} \leq 900 \text{ MHz}$	40

8.2.1.4 Interpretation of the measurement results

The interpretation of the results recorded in a test report for the radiated emission measurements described in the present document shall be as follows:

- the measured value related to the corresponding limit will be used to decide whether an equipment meets the requirements of the present document;
- the value of the measurement uncertainty for the measurement of each parameter shall be included in the test report;
- the recorded value of the measurement uncertainty shall be, for each measurement, equal to or lower than the figures in table 8.2.1-4-1 for BS.

Table 8.2.2 specifies the Maximum measurement uncertainty of the Test System. The Test System shall enable the equipment under test to be measured with an uncertainty not exceeding the specified values. All tolerances and uncertainties are absolute values, and are valid for a confidence level of 95 %, unless otherwise stated.

A confidence level of 95% is the measurement uncertainty tolerance interval for a specific measurement that contains 95% of the performance of a population of test equipment.

Table 8.2.1.4-1: Maximum measurement uncertainty (BS)

Parameter	Uncertainty for EUT dimension ≤ 1 m	Uncertainty for EUT dimension >1 m
Effective radiated RF power between 30 MHz to 180 MHz	± 6 dB	± 6 dB
Effective radiated RF power between 180 MHz to 4 GHz	± 4 dB	± 6 dB
Effective radiated RF power between 4 GHz to 12,75 GHz	± 6 dB	± 9 dB (NOTE)
NOTE: This value may be reduced to ± 6 dB when further information on the potential radiation characteristic of the EUT is available.		

NOTE: If the Test System for a test is known to have a measurement uncertainty greater than that specified in table 8.2.2, this equipment can still be used, provided that an adjustment is made follows:

Any additional uncertainty in the Test System over and above that specified in table 8.2.1.4-1 is used to tighten the Test Requirements - making the test harder to pass. This procedure will ensure that a Test System not compliant with table 8.2.1.4-1 2 does not increase the probability of passing a EUT that would otherwise have failed a test if a Test System compliant with table 8.2.1.4-1 had been used.

8.2.2 Radiated emission, ancillary equipment

This test is applicable to ancillary equipment. This test shall be performed on a representative configuration of the ancillary equipment.

8.2.2.1 Definition

This test assesses the ability of ancillary equipment to limit unwanted emission from the enclosure port.

8.2.2.2 Test method

The test method shall be in accordance with CISPR 32 [34].

8.2.2.3 Limits

The ancillary equipment shall meet the limits according to CISPR 32 [34] table A.4 and table A.5.

For the referred limit values, the following shall apply:

- Where the limits value varies over a given frequency range, it changes linearly with respect to the logarithm of the frequency.
- Where there is a step in the relevant limit, the lower value shall be applied at the transition frequency.

Table 8.2.2.3-1: Void

Table 8.2.2.3-2: Void

Alternatively, for *ancillary equipment* intended to be used in telecommunication centres only, the class A limits given in CISPR 32 [34], annex A, table A.2 and table A.3 may be used.

8.3 Conducted emission DC power input/output port

This test is applicable to equipment which may have DC cables longer than 3 m.

If the DC power cable of the radio equipment is intended to be less than 3 m in length and intended only for direct connection to a dedicated AC to DC power supply, then the measurement shall be performed only on the AC power input of that power supply as specified in subclause 8.4.

This test shall be performed on a representative configuration of the radio equipment, the associated ancillary equipment, or representative configuration of the combination of radio and ancillary equipment.

8.3.1 Definition

This test assesses the ability of radio equipment and ancillary equipment to limit internal noise from the DC power input/output ports.

8.3.2 Test method

The test method shall be in accordance with CISPR 32 [34] and the Artificial Mains Network (AMN) shall be connected to a DC power source.

In the case of DC output ports, the ports shall be connected via an AMN to a load drawing the rated current of the source.

A measuring receiver shall be connected to each AMN measurement port in turn and the conducted emission recorded.

The equipment shall be installed with a ground plane as defined in CISPR 32 [34]. The reference earth point of the AMNs shall be connected to the reference ground plane with a conductor as short as possible.

The measurement receiver shall be in accordance with the requirements of CISPR 32 [34].

8.3.3 Limits

The equipment shall meet the limits according to CISPR 32 [11] table A.9, which are defined for average detector receiver and for quasi-peak detector receiver. If the average limit is met when using a quasi-peak detector, the equipment shall be deemed to meet both limits and measurement with the average detector receiver is not necessary.

Where there is a step in the referred limit values, the lower value shall be applied at the transition frequency.

Table 8.3.3-1: Void

8.4 Conducted emissions, AC mains power input/output port

This test is applicable to equipment powered by the AC mains.

This test is not applicable to AC output ports which are connected directly (or via a circuit breaker) to the AC power port of the EUT.

This test shall be performed on a representative configuration of the radio equipment, the associated ancillary equipment, or representative configuration of the combination of radio and ancillary equipment.

8.4.1 Definition

This test assesses the ability of radio equipment and ancillary equipment to limit internal noise from the AC mains power input/output ports.

8.4.2 Test method

The test method shall be in accordance with CISPR 32 [34].

8.4.3 Limits

The equipment shall meet the limits according to CISPR 32 [11] table A.10, which are defined the average detector receiver and for quasi-peak detector receiver. If the average limit is met when using a quasi-peak detector, the equipment shall be deemed to meet both limits and measurement with the average detector receiver is not necessary.

For the referred limit values following shall apply:

- Where the limits value varies over a given frequency range, it changes linearly with respect to the logarithm of the frequency.
- Where there is a step in the relevant limit, the lower value shall be applied at the transition frequency.

Table 8.4.3-1: Void

Alternatively, for equipment intended to be used in telecommunication centres the limits given in CISPR 32 [11] table A.9 shall be used.

Table 8.4.3-2: Void

8.5 Harmonic current emissions (AC mains input port)

The requirements of IEC 61000-3-2 [19] for harmonic current emission apply for equipment covered by the scope of the present document. For equipment with an input current of greater than 16 A per phase, IEC 61000-3-12 [20] applies.

8.6 Voltage fluctuations and flicker (AC mains input port)

The requirements of IEC 61000-3-3 [21] for voltage fluctuations and flicker apply for equipment covered by the scope of the present document. For equipment with an input current of greater than 16 A per phase, IEC 61000-3-12 [20] applies.

8.7 Telecommunication ports

This test is applicable for radio equipment and/or ancillary equipment for fixed use which have telecommunication ports.

This test shall be performed on a representative configuration of radio equipment, the associated ancillary equipment, or a representative configuration of the combination of radio and ancillary equipment.

8.7.1 Definition

This test assesses the EUT unwanted emission present at the telecommunication ports.

8.7.2 Test method

The test method shall be in accordance with CISPR 32 [34].

The measurement frequency range extends from 150 kHz to 30 MHz.

8.7.3 Limits

The telecommunication ports shall meet the limits according to CISPR 32 [34] table A.12, clause A12.2.

For the referred limit values, following shall apply:

- Where the limits value varies over a given frequency range, it changes linearly with respect to the logarithm of the frequency.
- Where there is a step in the relevant limit, the lower value shall be applied at the transition frequency.

Table 8.7.3-1: Void

Alternatively, for equipment intended to be used in telecommunication centres only, the limits given in CISPR 32 [11] table A.11 clause A11.2 shall be used.

Table 8.7.3-2: Void

9 Immunity

9.1 Test configurations

This subclause defines the configurations for immunity tests as follows:

- the equipment shall be tested under normal test conditions as specified in the functional standards;
- the test configuration shall be as close to normal intended use as possible;
- if the equipment is part of a system, or can be connected to ancillary equipment, then it shall be acceptable to test the equipment while connected to the minimum configuration of ancillary equipment necessary to exercise the ports;
- if the equipment has a large number of ports, then a sufficient number shall be selected to simulate actual operation conditions and to ensure that all the different types of termination are tested;
- the test conditions, test configuration and mode of operation shall be recorded in the test report;
- ports which in normal operation are connected shall be connected to an ancillary equipment or to a representative piece of cable correctly terminated to simulate the input/output characteristics of the ancillary equipment, Radio Frequency (RF) input/output ports shall be correctly terminated;
- ports which are not connected to cables during normal operation, e.g. service connectors, programming connectors, temporary connectors etc. shall not be connected to any cables for the purpose of EMC testing. Where cables have to be connected to these ports, or interconnecting cables have to be extended in length in order to exercise the EUT, precautions shall be taken to ensure that the evaluation of the EUT is not affected by the addition or extension of these cables;
- Immunity tests on the entire base station shall be performed by establishing communication links at the radio interface (e.g. with the mobile simulator) and the S1/Iub/ Abis interface (e.g. with an RNC/EPC/BSC simulator) and evaluating the BLER/throughput/BER (see Figure 9.1-1);
- Immunity tests shall be performed on both the Uplink and Downlink paths. The tests shall also include both the radio interface and the S1/Iub/ Abis interface. BLER/throughput/BER evaluation may be carried out at either interface, where appropriate, and the measurements for the Uplink and Downlink paths may be carried out as a single path looped at either the radio interface or S1/Iub/ Abis interface. In case of looping is used care have to be taken that the BLER/throughput/BER information doesn't change due to looping.
- For BS capable of multi-RAT and/or multi-band operation, communication links shall be established in such a way that all tested RATs and operating band(s) are activated during the test according to the applicable test configurations in subclause 4.5. Performance assessment may be done separately for each tested RAT and/or operating band.

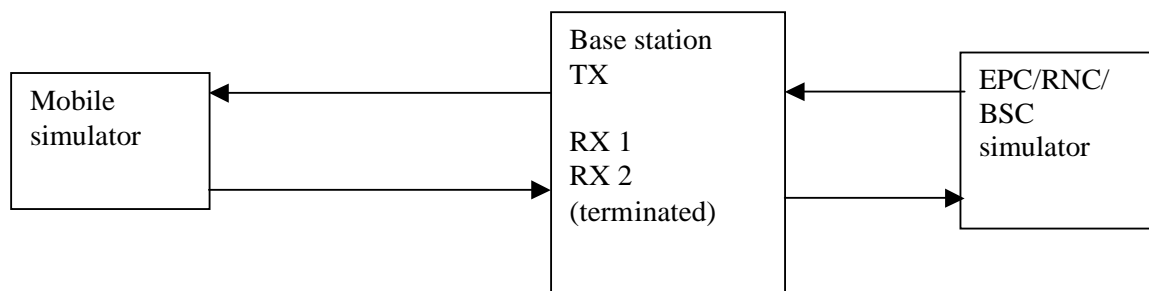


Figure 9.1-1: Communication link set up for BS immunity measurement

9.2 RF electromagnetic field (80 MHz - 6000 MHz)

The test shall be performed on a representative configuration of the equipment, the associated ancillary equipment, or representative configuration of the combination of radio and ancillary equipment.

9.2.1 Definition

This test assesses the ability of radio equipment and ancillary equipment to operate as intended in the presence of a radio frequency electromagnetic field disturbance at the enclosure.

9.2.2 Test method and level

The test method shall be in accordance with IEC 61000-4-3 [23], which specifies test methodology based on anechoic chamber. The use of reverberation chamber test method according to IEC 61000-4-21 [40], clause 6.1 and Annex D as alternative method is allowed.

The following requirements shall apply:

- the test level shall be 3 V/m amplitude modulated to a depth of 80 % by a sinusoidal audio signal of 1 kHz;
- the stepped frequency increments shall be 1 % of the momentary frequency;
- the test shall be performed over the frequency range 80 MHz - 6000 MHz with the exception of the exclusion band for receivers (see subclause 4.4);
- responses in stand-alone receivers or receivers which are part of transceivers occurring at discrete frequencies which are narrow band responses, shall be disregarded, see subclause 4.3;
- the frequencies selected during the test shall be recorded in the test report.

9.2.3 Performance criteria

Base station:

The performance criteria of subclause 6.1 shall apply.

Ancillary equipment:

The performance criteria of subclause 6.3 shall apply.

9.3 Electrostatic discharge

The test shall be performed on a representative configuration of the radio equipment, the associated ancillary equipment, or representative configuration of the combination of radio and ancillary equipment.

9.3.1 Definition

This test assesses the ability of radio equipment and ancillary equipment to operate as intended in the event of an electrostatic discharge.

9.3.2 Test method and level

The test method shall be in accordance with IEC 61000-4-2 [24]:

- for contact discharge, the equipment shall pass at ± 4 kV;
- for air discharge shall pass at ± 8 kV;
- electrostatic discharge shall be applied to all exposed surfaces of the EUT except where the user documentation specially indicates a requirement for appropriate protective measures.

NOTE: Ensure that the EUT is fully discharged between each ESD exposure.

9.3.3 Performance criteria

Base station:

The performance criteria of subclause 6.2 shall apply.

Ancillary equipment:

The performance criteria of subclause 6.4 shall apply.

9.4 Fast transients common mode

The test shall be performed on AC mains power input ports.

This test shall be performed on signal ports, telecommunication ports, control ports and DC power input/output ports if the cables may be longer than 3 m.

Where this test is not carried out on a port or any other ports because the manufacturer declares in DEMC.1 (see table 4.6-1) that it is not intended to be used with cables longer than 3 m, a list of ports which were not tested for this reason shall be included in the test report.

This test shall be performed on a representative configuration of the equipment, the associated ancillary equipment, or representative configuration of the combination of radio and ancillary equipment.

9.4.1 Definition

This test assesses the ability of radio equipment and ancillary equipment to operate as intended in the event of fast transients present on one of the input/output ports.

9.4.2 Test method and level

The test method shall be in accordance with IEC 61000-4-4 [25]:

- the test level for signal ports, telecommunication ports and control ports shall be 0,5 kV open circuit voltage as given in IEC 61000-4-4 [25];
- the test level for DC power input/output ports shall be 0.5 kV open circuit voltage as given in IEC 61000-4-4 [25];
- the test level for AC mains power input ports shall be 1 kV open circuit voltage as given in IEC 61000-4-4 [25].

For AC and DC power input ports the transients shall be applied (in parallel) to all the conductors in the cable with reference to the cabinet reference earth (true common mode) and the source impedance shall be 50 Ω .

9.4.3 Performance criteria

Base station:

The performance criteria of subclause 6.2 shall apply.

Ancillary equipment:

The performance criteria of subclause 6.4 shall apply.

9.5 RF common mode (0,15 MHz - 80 MHz)

The test shall be performed on AC mains power input/output ports.

This test shall be performed on signal ports, telecommunication ports, control and DC power input/output ports, which may have cables longer than 3 m.

Where this test is not carried out on a port or any other ports because the manufacturer declares in DEMC.1 (see table 4.6-1) that it is not intended to be used with cables longer than stated above, a list of ports which were not tested shall be included in the test report.

This test shall be performed on a representative configuration of the equipment, the associated ancillary equipment, or representative configuration of the combination of radio and ancillary equipment.

NOTE: This test can also be performed using the clamp injection method, where appropriate, see IEC 61000-4-6 [26].

9.5.1 Definition

This test assesses the ability of radio equipment and ancillary equipment to operate as intended in the presence of a radio frequency electromagnetic disturbance.

9.5.2 Test method and level

The test method shall be in accordance with IEC 61000-4-6 [26]:

- the test signal shall be amplitude modulated to a depth of 80 % by a sinusoidal audio signal of 1 kHz;
- the stepped frequency increments shall be 50 kHz in the frequency range 150 kHz to 5 MHz and 1% frequency increment of the momentary frequency in the frequency range 5 MHz to 80 MHz;
- the test level shall be severity level 2 as given in IEC 61000-4-6 [26] corresponding to 3 V rms, at a transfer impedance of 150 Ω ;
- the test shall be performed over the frequency range 150 kHz - 80 MHz;
- the injection method to be used shall be selected according to the basic standard IEC 61000-4-6 [26];
- responses of stand-alone receivers or receivers which are part of transceivers occurring at discrete frequencies which are narrow band responses, shall be disregarded, see subclause 4.3;
- the frequencies of the immunity test signal selected and used during the test shall be recorded in the test report.

9.5.3 Performance criteria

Base station:

The performance criteria of subclause 6.1 shall apply.

Ancillary equipment:

The performance criteria of subclause 6.3 shall apply.

9.6 Voltage dips and interruptions

The tests shall be performed on AC mains power input ports.

These tests shall be performed on a representative configuration of the equipment, the associated ancillary equipment, or representative configuration of the combination of radio and ancillary equipment.

9.6.1 Definition

These tests assess the ability of radio equipment and ancillary equipment to operate as intended in the event of voltage dips and interruptions present on the AC mains power input ports.

9.6.2 Test method and level

The test method shall be in accordance with IEC 61000-4-11 [27], where the test levels shall be:

- Voltage dip: 0 % residual voltage for 0.5 cycle;
- Voltage dip: 0 % residual voltage for 1 cycle;
- Voltage dip: 70 % residual voltage for 25/30 cycles (at 50/60 Hz);
- Voltage interruption: 0 % residual voltage for 250/300 cycles (at 50/60 Hz).

9.6.3 Performance criteria

For a 0 % residual voltage dip test, the performance criteria for transient phenomena shall be applied:

- Criteria 6.2 for base station
- Criteria 6.4 for ancillary equipment

For a 70% residual voltage dip test and for voltage interruption test, the following applies:

1. In the case where the equipment is fitted with or connected to a battery back-up, the following performance criteria shall be applied:
 - Criteria 6.2 for base station
 - Criteria 6.4 for ancillary equipment
2. In the case where the equipment is powered solely from the AC mains supply (without the use of a parallel battery back-up) volatile user data may have been lost and if applicable the communication link need not to be maintained and lost functions should be recoverable by user or operator:
 - No unintentional responses shall occur at the end of the test, when the voltage is restored to nominal
 - In the event of loss of communications link or in the event of loss of user data, this fact shall be recorded in the test report

9.7 Surges, common and differential mode

The tests shall be performed on AC mains power input ports.

This test shall be additionally performed on telecommunication ports.

These tests shall be performed on a representative configuration of the equipment, the associated ancillary equipment, or representative configuration of the combination of radio and ancillary equipment.

9.7.1 Definition

These tests assess the ability of radio equipment and ancillary equipment to operate as intended in the event of surges being present at the AC mains power input ports and telecommunication ports.

9.7.2 Test method and level

The test method shall be in accordance with IEC 61000-4-5 [28].

The requirements and evaluation of test results given in subclause 9.7.2.1 (telecommunication ports, outdoor cables), subclause 9.7.2.2 (telecommunication ports, indoor cables) and subclause 9.7.2.3 (AC power ports) shall apply, but no test shall be required where normal functioning cannot be achieved, because of the impact of the CDN on the EUT.

9.7.2.1 Test method for telecommunication ports directly connected to outdoor cables

The test level for telecommunications ports, intended to be directly connected to the telecommunications network via outdoor cables, shall be 1 kV line to ground as given in IEC 61000-4-5 [28]. In this case the total output impedance of the surge generator shall be in accordance with the basic standard IEC 61000-4-5 [28].

The test generator shall provide the 1,2/50 μ s pulse as defined in IEC 61000-4-5 [28].

9.7.2.2 Test method for telecommunication ports connected to indoor cables

The test level for telecommunication ports, intended to be connected to indoor cables (longer than 10 m) shall be 0,5 kV line to ground. In this case the total output impedance of the surge generator shall be in accordance with the basic standard IEC 61000-4-5 [28].

The test generator shall provide the 1,2/50 μ s pulse as defined in IEC 61000-4-5 [28].

9.7.2.3 Test method for AC power ports

The test level for AC power input ports shall be 2 kV line to ground, and 1 kV line to line, with the output impedance of the surge generator as given in IEC 61000-4-5 [28].

In telecommunication centres 1 kV line to ground and 0,5 kV line to line shall be used.

The test generator shall provide the 1,2/50 μ s pulse as defined in IEC 61000-4-5 [28].

9.7.3 Performance criteria

Base station:

The performance criteria of subclause 6.2 shall apply.

Ancillary equipment:

The performance criteria of subclause 6.4 shall apply.

Annex A (normative): BER assessment for GSM/EDGE

A.1 Assessment of BER at the output of a transmitter

The BER at the output of the transmitter may be assessed using either of the techniques described below.

A.1.1 Assessment of BER using static layer 1 functions

The transmitter under test shall be operated according to the test case of TS 51.021 [10], subclause 6.1.2.

The bit sequence from the output of the transmitter shall be monitored by the test system according to the test case of TS 51.021 [10], subclause 7.1.2, and the BER of the class 2 bits for TCH/FS assessed. The BER shall not exceed the values specified in subclause 6.1 of the present document.

If the EUT does not support TCH/FS, the manufacturer shall declare the logical channel for which the performance shall be assessed, and the corresponding performance criteria.

A.1.2 Assessment of BER using RXQUAL

The output of the transmitter shall be connected to an equipment which meets the requirements of TS 51.010-1 [33] for the assessment of RXQUAL. The level of the signal supplied to the equipment should be within the range for which the assessment of RXQUAL is not impaired. The RXQUAL shall be monitored during the test. The RXQUAL shall not exceed the values specified in subclause 6.1 of the present document.

NOTE: This equipment can be a GSM mobile station with suitable provision for the monitoring of RXQUAL.

A.2 Assessment of BER at the output of a receiver

The BER at the output of the receiver may be assessed using either of the techniques described below.

A.2.1 Assessment of BER using RXQUAL

The value of the RXQUAL reported by the BTS or BSS shall be monitored using suitable test equipment.

A.2.2 Assessment of BER using reported BER

The BER of the class 2 bits at the output of the receiver shall be assessed using suitable test equipment.

If the EUT does not support TCH/FS, the manufacturer shall declare the logical channel for which the performance shall be assessed, and the corresponding performance criteria.

NOTE: This can be performed by a "test loopback" which uses the transmitter of the BTS to return the data which has been decoded by the receiver back to the test equipment which generated the bit sequence. For immunity tests of signal ports, the "test loopback" includes an external connection between signal ports.

Annex B (normative): Simplified immunity testing

B.1 Applicability

Simplified immunity testing applies, per operating band, only to the BS which satisfies both of the following conditions:

- Radio unit employs common active RF components for supported RATs, as described in DEMC.2.
- Radio digital unit employs common active components for supported RATs, as described in DEMC.4.

Note: If the above condition is not met, all applicable test configurations in clause 4.5 apply for testing.

B.2 Capability Sets for simplified immunity testing

The set of RATs which are considered sufficient for the immunity testing purposes depends on the BS hardware capabilities declared by the manufacturer in DEMC.2 and DEMC.4.

The following RAT combinations were identified as candidates for the immunity testing simplification:

- For MSR BS declared to support E-UTRA and UTRA, UTRA does not have to be configured.
- For MSR BS declared to support NR and UTRA, UTRA does not have to be configured.
- For MSR BS declared to support NB-IoT and GSM, GSM needs not to be configured.

The above RAT combinations were further translated into the Capability Sets in tables below.

For single-band multi-RAT capable MSR BS, the sufficient CSs in tables B.2-1 to B.2-4 may be followed, instead of the declared CSs in tables 4.5-1 to 4.5-1c, respectively.

The test configurations (TCx) are associated to the sufficient CSs according to tables 4.5-1, 4.5-1a, 4.5-1b and 4.5-1c.

Example: A BS declared to support CS9 (corresponding to TC9 in table 4.5-1a) in table B.2-2, will be tested using TC8 (corresponding to CS8 in table 4.5-2).

Table B.2-1: Declared and sufficient CSs for testing

Declared Capability Set	CS3 (U, E, IoT NI/NG)	CS4 (G, U)	CS5 (G, E, IoT NI/NG)	CS6 (G, U, E)	CS7 (G, U, E, IoT NI/NG)
Sufficient CS for testing	CS2 (E, IoT NI/NG)	CS4 (G, U)	CS2 ^{NOTE 1} (E, IoT NI/NG) CS5 (G, E)	CS5 (G, E)	CS2 ^{NOTE 1} (E, IoT NI/NG) CS5 (G, E)
NOTE 1: either NB-IoT in-band or guard band is supported, otherwise, no EMC enhancement for GSM for the declared CS.					
NOTE 2: G, U, E and IoT NI/NG stand for GSM, UTRA, E-UTRA and NB-IoT in-band/guard band.					

Table B.2-2: Declared and sufficient CSs for testing

Declared Capability Set	CS9 (G, IoT SA)	CS10 (U, IoT SA)	CS11 (E, IoT SA)	CS12 (G, U, IoT SA)	CS13 (G, E, IoT SA)
Sufficient CS for testing	CS8 (IoT SA)	CS10 (U, IoT SA)	CS11 (E, IoT SA)	CS10 (U, IoT SA)	CS11 (E, IoT SA)
NOTE 1: G, U, E and IoT SA stand for GSM, UTRA, E-UTRA and NB-IoT standalone.					

Table B.2-3: Declared and sufficient CSs for testing

Declared Capability Set	CS14 (U, E, IoT SA)	CS15 (G, U, E, IoT SA)	CS16 (N, E, IoT NI/NG)	CS17 (N, IoT SA, E, IoT NI/NG)
Sufficient CS for testing	CS11 (E, IoT SA)	CS11 (E, IoT SA)	CS16 (N, E, IoT NI/NG)	CS17 (N, IoT SA, E, IoT NI/NG)
NOTE 1: G, U, E, IoT NI/NG, IoT SA and N stand for GSM, UTRA, E-UTRA, NB-IoT in-band/guard band, NB IoT standalone and NR.				

Table B.2-4: Declared and sufficient CSs for testing

Declared Capability Set	CS18 (G, N, E, IoT NI/NG)	CS19 (U, N, E, IoT NI/NG)
Sufficient CS for testing	CS16 ^{NOTE 1} (N, E, IoT NI/NG)	CS16 (N, E, IoT NI/NG)
	CS18 (G, N, E)	
NOTE 1: either NB-IoT in-band or guard band is supported, otherwise, no EMC enhancement for GSM for the declared CS.		
NOTE 2: G, U, E, IoT NI/NG and N stand for GSM, UTRA, E-UTRA, NB-IoT in-band/guard band and NR.		

For multi-band multi-RAT capable MSR BS, the rationale described above applies for each band.

Annex C (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2010-02	R4#54	R4-100572				Specification skeleton	0.0.1
2010-04	R4#55	R4-101577				E-mail approved Text Proposals after RAN4 AH#2: R4-101189, "TS 37.113: TP on References, Definitions, symbols and abbreviations (TS ch 2 and 3) " R4-101190, "TS 37.113: TP on Test conditions (TS ch 4)" R4-101191, "TS 37.113: TP on Performance assessment (TS ch 5)" R4-101192, "TS 37.113: TP on Performance Criteria (TS ch 6)" R4-101193, "TS 37.113: TP on Applicability overview (TS ch 7)" R4-101194, "TS 37.113: TP on Emission (TS ch 8)" R4-101195, "TS 37.113: TP on Immunity (TS ch 9)"	0.1.0
2010-06	RP#48	RP-100581				Presentation to TSG RAN.	1.0.0
2010-06	RP#48	RP-100581				Approval by TSG RAN.	9.0.0
2010-09	RP-49	RP-100923	002	1		EMC updates for multi-RAT operation	9.1.0
2010-09	RP-49	RP-100923	003			Clarification of radiated emissions requirement	9.1.0
2010-09	RP-49	RP-100927	001			CR LTE_TDD_2600_US spectrum band definition additions for MSR BS to TS 37.113	10.0.0
2010-12	RP-50	RP-101345	010			Band XII/12 frequency range	10.1.0
2010-12	RP-50	RP-101346	006			MSR test configuration for EMC	10.1.0
2010-12	RP-50	RP-101346	008			Correction of CR implementation in clause 6.2 of TS 37.113	10.1.0
2010-12	RP-50	RP-101356	004	1		Band 42 and 43 parameters for UMTS/LTE 3500 (TDD) for TS 37.113	10.1.0
2011-06	RP-52	RP-110812	014	1		Add 2GHz S-Band (Band 23) in 37.113	10.2.0
2011-09	RP-53	RP-111255	017			Add Band 22/XXII for LTE/UMTS 3500 (FDD) to TS 37.113	10.3.0
2011-12	RP-54	RP-111734	018	1		Removal of references to operating bands i) and h)	10.4.0
2011-12	RP-54	RP-111735	019	1		EMC requirements for MSR-NC	10.4.0
2012-03	RP-55	RP-120305	020			Add Extending 850 MHz Upper Band (814 - 849 MHz) to TS37.113	11.0.0
2012-06	RP-56	RP-120793	023			Introduction of APAC700(FDD) into TS 37.113	11.1.0
2012-06	RP-56	RP-120793	024			Introduction of APAC700(TDD) into TS 37.113	11.1.0
2012-06	RP-56	RP-120791	025			Introduction of e850_LB (Band 27) to TS 37.113	11.1.0
2013-06	RP-60	RP-130792	026			Introduction of Band 30 in TS 37.113	12.0.0
2013-06	RP-60	RP-130790	027			Introduction of LTE 450 into TS 37.113	12.0.0
2014-06	RP-64	RP-140914	033			Introduction of band 29 in TS 37.113	12.1.0
2014-06	RP-64	RP-140926	029			Introduction of Band 32/XXXII in TS 37.113	12.1.0
2014-09	RP-65	RP-141562	0036	1		Update of definitions to support supplemental DL in TS37.113	12.2.0
2014-12	RP-66	RP-142146	038			EMC testing of multi-band operation for MSR BS	12.3.0
2015-12	RP-70	RP-152171	0039			Introduction of Band 65	13.0.0
2015-12	RP-70	RP-152172	0040			Introduction of Band 66	13.0.0
2015-12	RP-70	RP-152157	0041			Introduction of Band 67	13.0.0
2015-12	RP-70	RP-152173	0042			Introduction of 1447-1467MHz Band into 37.113	13.0.0
2016-03	RP-71	RP-160483	0043		B	Introduction of Band 68 into 37.113	13.1.0
2016-03	RP-71	RP-160490	0044		F	Introduction of Band 46 in TS 37.113	13.1.0

2016-06	RP-72	RP-161142	0047	-	F	Clarification in EMC environmental conditions references	13.2.0
2016-06	RP-72	RP-161141	0052	-	F	Necessary updates in 37.113 on receiver exclusion bands	13.2.0
2016-06	RP-72	RP-161125	0045	-	B	Introduction of Band 70 to 37.113	14.0.0
2016-06	RP-72	RP-161124	0048	-	B	CR to 37.113 on receiver exclusion band update due to Band 69	14.0.0
2016-12	RP-74	RP-162379	0054	-	A	CR to TS 37.113 – Introduction of NB-IoT	14.1.0
2016-12	RP-74	RP-162405	0055	-	B	Introduction of Band 48	14.1.0
2017-06	RP-76	RP-171285	0068	-	A	CR on eLAA BS for TS 37.113	14.2.0
2017-09	RP-77	RP-171948	0070	-	B	Introduction of the FDD L-band (Band 74) into TS 37.113	15.0.0
2017-09	RP-77	RP-171952	0071	-	B	CR to 37.113: Introduction of Band 71	15.0.0
2017-09	RP-77	RP-171950	0073	-	B	CR to 37.113: Introduction of B75 and B76	15.0.0
2017-09	RP-77	RP-171946	0074	-	B	Introduction of Band 72 into TS37.113	15.0.0
2017-09	RP-77	RP-171949	0075	1	B	Introduction of TDD L-band into TS 37.113	15.0.0
2017-12	RAN#78	RP-172593	0076	-	B	Introduction of Band 73 into TS 37.113	15.1.0
2018-03	RAN#79	RP-180279	0078	-	B	CR to 37.113: Introduction of Band 85	15.2.0
2018-03	RAN#79	RP-180282	0079	1	F	CR to TS 37.113: correction of the CISPR reference and ESD levels	15.2.0
2018-03	RAN#79	RP-180278	0080	-	B	Introduction of TDD 3.3-3.4GHz band (band 52)	15.2.0
2018-06	RAN#80	RP-181075	0082	1	B	CR to TS 37.113 (MSR EMC): NR EMC Core Requirements updates	15.3.0
2018-09	RAN#81	RP-181896	0084	1	F	CR to TS 37.113: correction of the exclusion band for BS radiated emission test (8.2.1)	15.4.0
2018-09	RAN#81	RP-181896	0085		F	CR to TS 37.113: CISPR32 requirements tables correction	15.4.0
2018-12	RAN#82	RP-182362	0088	1	B	Update the title to add NR of TS 37.113	15.5.0
2018-12	RAN#82	RP-182361	0089	1	F	CR to TS 37.113 (subclause 2 and 8.4.2)	15.5.0
2018-12	RAN#82	RP-182362	0092		B	CR to TS 37.113: introduction of the NR to MSR EMC specification	15.5.0
2019-06	RAN#84	RP-191236	0094	1	F	CR to TS 37.113 subclause 4.5	15.6.0
2019-09	RAN#85	RP-192019	0095	1	F	CR to TS 37.113 Correction on CISPR 16-1-1 for DC conducted Emission(clause 7.1 and subclause 8.3.2)	15.7.0
2019-09	RAN#85	RP-192019	0096		F	CR to TS 37.113 Correction on NR performance criteria(subclause 6.1.5)	15.7.0
2019-09	RAN#85	RP-192019	0097		F	CR to TS 37.113 Correction on surge test level for outdoor telecommunication ports(subclause 9.7.2.1)	15.7.0
2019-09	RAN#85	RP-192019	0098		F	CR to TS 37.113 subclause 4.5 - Implementation comment: The proposed changes in this CR are already captured in the latest version.	15.7.0
2019-09	RAN#85	RP-192046	0100	1	F	CR to 37.113 Editorial Corrections	15.7.0
2019-12	RAN#86	RP-193002	0105		F	CR to TS 37.113 Correction on definitions subclause 3.1	15.8.0
2019-12	RAN#86	RP-193002	0106		F	CR to TS 37.113 Correction on radiated emission subclause 8.2	15.8.0
2019-12	RAN#86	RP-193002	0107		F	CR to TS 37.113 Correction on transient phenomena performance criteria subclause6.2	15.8.0
2020-06	RAN#88	RP-200984	0109	1	F	Draft CR to 37.113 Introducing Reverberation Chamber	15.9.0
2020-06	RAN#88	-	-	-	-	Update to Rel-16 version (MCC)	16.0.0
2020-12	RAN#90	RP-202489	0111	1	A	CR to TS 37.113 on Voltage dips and interruptions, Release 16	16.1.0
2021-06	RAN#92	RP-211086	0113		A	CR to TS 37.113: Radiated emission, ancillary equipment	16.2.0

Change history

Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-03	SA#95					Update to Rel-17 version (MCC)	17.0.0
2023-03	RAN#99	RP-230502	0118		A	CR to TS 37.113 MSR base station test configuration R17	17.1.0
2023-03	RAN#99	RP-230505	0121		A	TS 37.113: Corrections in clause 9 Immunity	17.1.0
2023-06	RAN#100	RP-231358	0123	1	F	CR on TS 37.113 MSR base station test configuration and performance criteria R17	17.2.0
2023-12	RAN#102	RP-233334	0133		A	CR to TS 37.113 on adding link between telecommunication port and wired network port	17.3.0
2023-12	RAN#102	RP-233330	0136		A	[RInImp9-RFmulti, TEI15] CR to TS 37.113: Test configurations correction for CS7, Rel-17	17.3.0

Change history

Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2023-12	RAN#102					Approved by plenary – Rel-18 spec under change control	18.0.0
2024-03	RAN#103	RP-240591	0139		F	(NB_IOT, NR_FR1_less than_5MHz_BW) CR to TS 37.113 on update of FRC used in performance criteria	18.1.0

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2025-09	RAN#109	RP-252420	0142		B	CR to TS 37113 - Introduction of 7 MHz channel BW	19.0.0
2025-12	RAN#110	RP-253645	0143		F	(NR_FR1_7MHz_BW-Perf) CR to TS 37.113: Correction of channel bandwidths for performance criteria for continuous phenomena	19.1.0
2025-12	RAN#110	RP-253684	0147		A	(TE116-BDaT_FRC_thp) CR to TS 37.113: Correction of the description of maximum throughput for an FRC	19.1.0

History

Version	Date	Status
V19.0.0	October 2025	Publication
V19.1.0	February 2026	Publication