

**Universal Mobile Telecommunications System (UMTS);
Open Service Access (OSA)
Application Programming Interface (API);
Part 14: Presence and Availability Management (PAM)
Service Capability Feature (SCF)
(3GPP TS 29.198-14 version 7.0.0 Release 7)**



Reference

RTS/TSGC-0529198-14v700

Keywords

UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:
<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at
<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:
http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2007.
All rights reserved.

DECT™, PLUGTESTS™ and UMTS™ are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under
<http://webapp.etsi.org/key/queryform.asp>.

Contents

Intellectual Property Rights	2
Foreword.....	2
Foreword.....	8
Introduction	8
1 Scope	10
2 References	10
3 Definitions and abbreviations.....	10
3.1 Definitions	10
3.2 Abbreviations	11
4 Presence and Availability Management SCF.....	11
4.1 Introduction	11
4.2 Motivation	11
4.3 Goals	11
4.4 Concepts	11
4.4.1 Identity	12
4.4.2 Presence	12
4.4.3 Availability	13
4.4.4 Events	14
4.5 Scope of PAM information	14
4.6 Security and privacy	14
5 Sequence Diagrams	15
5.1 Use of authentication tokens	15
5.2 Event registration and notification	16
6 Class Diagrams.....	17
6.1 PAM Provisioning SCF Class Diagrams.....	17
6.2 PAM Access SCF Class Diagrams.....	19
6.3 PAM Event SCF Class Diagrams.....	20
7 The Service Interface Specifications.....	21
7.1 Interface Specification Format	21
7.1.1 Interface Class	21
7.1.2 Method descriptions.....	22
7.1.3 Parameter descriptions	22
7.1.4 State Model.....	22
7.2 Base Interface	22
7.2.1 Interface Class IpInterface	22
7.3 Service Interfaces	22
7.3.1 Overview	22
7.4 Generic Service Interface	22
7.4.1 Interface Class IpService	22
7.4.1.1 Method setCallback()	23
7.4.1.2 Method setCallbackWithSessionID().....	23
8 Presence and Availability Management Interface Classes.....	24
8.1 PAM Provisioning SCF Interface Classes	24
8.1.1 Interface Class IpPAMPProvisioningManager	24
8.1.1.1 Method getToken().....	25
8.1.1.2 Method obtainInterface()	25
8.1.1.3 Method getAccessControl()	26
8.1.1.4 Method setAccessControl().....	26
8.1.2 Interface Class IpPAMIIdentityManagement	27
8.1.2.1 Method createIdentity().....	28
8.1.2.2 Method deleteIdentity().....	29
8.1.2.3 Method isIdentity().....	29

8.1.2.4	Method createGroupIdentity().....	30
8.1.2.5	Method deleteGroupIdentity().....	30
8.1.2.6	Method addToGroup()	30
8.1.2.7	Method removeFromGroup()	31
8.1.2.8	Method listMembers().....	31
8.1.2.9	Method isGroupIdentity()	32
8.1.2.10	Method listGroupMembership()	32
8.1.2.11	Method addAlias()	33
8.1.2.12	Method removeAliases()	33
8.1.2.13	Method listAliases()	34
8.1.2.14	Method lookupByAlias()	34
8.1.2.15	Method associateTypes()	34
8.1.2.16	Method disassociateTypes().....	35
8.1.2.17	Method listTypesOfIdentity()	35
8.1.2.18	Method hasType()	36
8.1.2.19	Method getIdentityAttributes()	36
8.1.2.20	Method setIdentityAttributes()	37
8.1.3	Interface Class IpPAMAgentManagement	37
8.1.3.1	Method createAgent()	38
8.1.3.2	Method deleteAgent()	39
8.1.3.3	Method isAgent()	39
8.1.3.4	Method enableCapabilities()	39
8.1.3.5	Method disableCapabilities()	40
8.1.3.6	Method listEnabledCapabilities().....	40
8.1.3.7	Method listAllCapabilities().....	41
8.1.3.8	Method isCapableOf().....	41
8.1.3.9	Method associateTypes()	42
8.1.3.10	Method disassociateTypes().....	42
8.1.3.11	Method listTypesOfAgent()	43
8.1.3.12	Method hasType()	43
8.1.3.13	Method getAgentAttributes()	43
8.1.3.14	Method setAgentAttributes().....	44
8.1.4	Interface Class IpPAMAgentAssignment	45
8.1.4.1	Method assignAgent()	45
8.1.4.2	Method unassignAgent()	46
8.1.4.3	Method listAssignedAgents().....	46
8.1.4.4	Method listAssociatedIdentitiesOfAgent().....	47
8.1.4.5	Method listAssignedAgentsByCapability()	47
8.1.4.6	Method listCapabilitiesOfIdentity()	47
8.1.4.7	Method isIdentityCapableOf()	48
8.1.5	Interface Class IpPAMIdentityTypeManagement	48
8.1.5.1	Method createIdentityAttribute()	49
8.1.5.2	Method deleteIdentityAttribute()	49
8.1.5.3	Method getIdentityAttributeDefinition().....	50
8.1.5.4	Method listAllIdentityAttributes()	50
8.1.5.5	Method createIdentityType().....	50
8.1.5.6	Method deleteIdentityType().....	51
8.1.5.7	Method listIdentityTypes().....	51
8.1.5.8	Method addIdentityTypeAttributes()	52
8.1.5.9	Method removeIdentityTypeAttributes()	52
8.1.5.10	Method listIdentityTypeAttributes()	53
8.1.6	Interface Class IpPAMAgentTypeManagement	53
8.1.6.1	Method createAgentAttribute()	54
8.1.6.2	Method deleteAgentAttribute()	54
8.1.6.3	Method getAgentAttributeDefinition()	55
8.1.6.4	Method listAllAgentAttributes()	55
8.1.6.5	Method createAgentType()	55
8.1.6.6	Method deleteAgentType()	56
8.1.6.7	Method listAgentTypes()	56
8.1.6.8	Method addAgentTypeAttributes()	57
8.1.6.9	Method removeAgentTypeAttributes()	57
8.1.6.10	Method listAgentTypeAttributes()	58

8.1.7	Interface Class IpPAMCapabilityManagement	58
8.1.7.1	Method createCapabilityAttribute()	59
8.1.7.2	Method deleteCapabilityAttribute()	59
8.1.7.3	Method getCapabilityAttributeDefinition()	60
8.1.7.4	Method listAllCapabilityAttributes()	60
8.1.7.5	Method createCapability()	61
8.1.7.6	Method deleteCapability()	61
8.1.7.7	Method listCapabilities()	61
8.1.7.8	Method addCapabilityAttributes()	62
8.1.7.9	Method removeCapabilityAttributes()	62
8.1.7.10	Method listCapabilityAttributes()	63
8.1.7.11	Method assignCapabilitiesToType()	63
8.1.7.12	Method unassignCapabilitiesFromType()	64
8.1.7.13	Method listCapabilitiesOfType()	64
8.2	PAM Access SCF Interface Classes	64
8.2.1	Interface Class IpPAMPresenceAvailabilityManager	64
8.2.1.1	Method getToken()	65
8.2.1.2	Method obtainInterface()	65
8.2.1.3	Method getAccessControl()	66
8.2.1.4	Method setAccessControl()	66
8.2.1.5	Method activateService()	67
8.2.1.6	Method deactivateService()	67
8.2.1.7	Method isActiveIdentity()	67
8.2.2	Interface Class IpPAMIdentityPresence	68
8.2.2.1	Method setIdentityPresence()	68
8.2.2.2	Method setIdentityPresenceExpiration()	69
8.2.2.3	Method getIdentityPresence()	69
8.2.3	Interface Class IpPAMAvailability	70
8.2.3.1	Method getAvailability()	71
8.2.3.2	Method getPreference()	72
8.2.3.3	Method setPreference()	72
8.2.4	Interface Class IpAppPAMPreferenceCheck	73
8.2.4.1	Method computeAvailability()	73
8.3	PAM Event SCF Interface Classes	74
8.3.1	Interface Class IpPAMEventManager	74
8.3.1.1	Method getToken()	74
8.3.1.2	Method obtainInterface()	75
8.3.1.3	Method getAccessControl()	75
8.3.1.4	Method setAccessControl()	76
8.3.1.5	Method activateService()	76
8.3.1.6	Method deactivateService()	77
8.3.1.7	Method isActiveIdentity()	77
8.3.2	Interface Class IpAppPAMEventHandler	77
8.3.2.1	Method eventNotify()	78
8.3.2.2	Method eventNotifyErr()	78
8.3.3	Interface Class IpPAMEventHandler	78
8.3.3.1	Method isRegistered()	79
8.3.3.2	Method registerAppInterface()	79
8.3.3.3	Method registerForEvent()	80
8.3.3.4	Method deregisterAppInterface()	80
8.3.3.5	Method deregisterFromEvent()	81
9	State Transition Diagrams	81
10	PAM Service Properties	81
10.1	PAM Access Service	82
10.2	PAM Event Service	82
11	PAM Data Definitions	82
11.1	Entity Address Definitions	82
11.1.1	TpPAMFQName	82
11.1.2	TpPAMFQNameList	82
11.2	Attribute Data Definitions	82

11.2.1	TpPAMAttribute	82
11.2.2	TpPAMAttributeList	82
11.2.3	TpPAMAttributeDef	83
11.2.4	TpPAMAttributeDefList	83
11.3	Presence Data Definitions	83
11.3.1	TpPAMCapability	83
11.3.2	TpPAMCapabilityList	83
11.3.3	TpPAMPresenceData	83
11.3.4	TpPAMPresenceDataList	84
11.4	Pre-defined Presence type	84
11.4.1	Presentity	84
11.5	Availability Data Definitions	84
11.5.1	TpPAMAvailabilityProfile	84
11.5.2	TpPAMAvailabilityProfileList	84
11.5.3	TpPAMPriVacyCode	84
11.6	Availability Context Data Definitions	84
11.6.1	TpPAMContext	85
11.6.2	TpPAMContextName	85
11.6.3	TpPAMContextData	85
11.6.4	TpPAMCommunicationContext	85
11.6.5	TpPAMContextList	85
11.7	Credential data definitions	86
11.7.1	TpPAMCredential	86
11.8	Availability and Access Control Preference Data Definitions	86
11.8.1	IpAppPAMPreferenceCheckRef	86
11.8.2	TpPAMAccessControlData	86
11.8.3	TpPAMACLDDefault	86
11.8.4	TpPAMPreferenceOp	86
11.8.5	TpPAMPreferenceType	87
11.8.6	TpPAMPreferenceData	87
11.9	Time data definitions	87
11.9.1	TpPAMTimeInterval	87
11.10	Pre-defined Entity Types and Attributes	87
11.11	Interface name definitions	88
11.11.1	TpPAMProvisioningInterfaceName	88
11.11.2	TpPAMPresenceAvailabilityInterfaceName	88
11.11.3	TpPAMEventInterfaceName	88
11.12	Event data definitions	89
11.12.1	IpAppPAMEventHandlerRef	89
11.12.2	TpPAMClientID	89
11.12.3	TpPAMEventID	89
11.12.4	TpPAMEventName	89
11.12.5	TpPAMEventNameList	89
11.12.6	TpPAMEventInfo	90
11.12.7	TpPAMEventInfoList	90
11.12.8	TpPAMNotificationInfo	90
11.12.9	TpPAMNotificationInfoList	91
11.12.10	PAM_CE_IDENTITY_CREATED	91
11.12.10.1	TpPAMICEventData	91
11.12.10.2	TpPAMICNotificationData	91
11.12.11	PAM_CE_IDENTITY_DELETED	91
11.12.11.1	TpPAMIDEEventData	91
11.12.11.2	TpPAMIDNotificationData	92
11.12.12	PAM_CE_GROUP_MEMBERSHIP_CHANGED	92
11.12.12.1	TpPAMGMCEEventData	92
11.12.12.2	TpPAMGMCNNotificationData	92
11.12.13	PAM_CE_AGENT_CREATED	92
11.12.13.1	TpPAMACEEventData	92
11.12.13.2	TpPAMACNotificationData	93
11.12.14	PAM_CE_AGENT_DELETED	93
11.12.14.1	TpPAMADEEventData	93
11.12.14.2	TpPAMADNotificationData	93

11.12.15	PAM_CE_AGENT_ASSIGNED	93
11.12.15.1	TpPAMAAEventData	94
11.12.15.2	TpPAMAANotificationData	94
11.12.16	PAM_CE_AGENT_UNASSIGNED	94
11.12.16.1	TpPAMAUEventData	94
11.12.16.2	TpPAMAUNotificationData	95
11.12.17	PAM_CE_CAPABILITY_CHANGED	95
11.12.17.1	TpPAMCCEventData	95
11.12.17.2	TpPAMCCNotificationData	95
11.12.18	PAM_CE_AGENT_CAPABILITY_PRESENCE_SET	95
11.12.18.1	TpPAMACPSEventData	96
11.12.18.2	TpPAMACPSNotificationData	96
11.12.19	PAM_CE_AGENT_PRESENCE_SET	96
11.12.19.1	TpPAMAPSEventData	96
11.12.19.2	TpPAMAPSNotificationData	97
11.12.20	PAM_CE_IDENTITY_PRESENCE_SET	97
11.12.20.1	TpPAMIPSEventData	97
11.12.20.2	TpPAMIPSNotificationData	97
11.12.21	PAM_CE_AVAILABILITY_CHANGED	97
11.12.21.1	TpPAMAVCEventData	98
11.12.21.2	TpPAMAVCNotificationData	98
11.12.22	PAM_CE_WATCHERS_CHANGED	98
11.12.22.1	TpPAMWCEventData	98
11.12.22.2	TpPAMWCNotificationData	99
11.12.22.3	TpPAMwatcherChangeType	99
11.13	Error Types	99
11.13.1	TpPAMErrorCause	99
11.13.2	TpPAMErrorInfo	99
12	Presence and Availability Management Exception Classes	100
Annex A (normative):	OMG IDL Description of Presence and Availability Management SCF	101
Annex B (informative):	W3C WSDL Description of the Presence and Availability Management SCFs	102
Annex C (informative):	Java™ API Description of the Presence and Availability Management SCFs	103
Annex D (informative):	Description of Presence and Availability Management for 3GPP2 cdma2000 networks	104
D.1	General Exceptions	104
D.2	Specific Exceptions	104
D.2.1	Clause 1: Scope	104
D.2.2	Clause 2: References	104
D.2.3	Clause 3: Definitions and abbreviations	104
D.2.4	Clause 4: Presence and Availability Management SCF	104
D.2.5	Clause 5: Sequence Diagrams	104
D.2.6	Clause 6 Class Diagrams	105
D.2.7	Clause 7: The Service Interface Specifications	105
D.2.8	Clause 8: Presence and Availability Management Interface Classes	105
D.2.9	Clause 9: State Transition Diagrams	105
D.2.10	Clause 10: PAM Service Properties	105
D.2.11	Clause 11: PAM Data Definitions	105
D.2.12	Clause 12: Presence and Availability Management Exception Classes	105
D.2.13	Annex A (normative):OMG IDL Description of Presence and Availability Management SCF	105
D.2.14	Annex C (informative): Java™ API Description of Presence and Availability Management SCF	105
Annex E (informative):	Change history	106
History	107	

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

The present document is part 14 of a multi-part TS covering the 3rd Generation Partnership Project: Technical Specification Group Core Network; Open Service Access (OSA); Application Programming Interface (API), as identified below. The **API specification** (3GPP TS 29.198) is structured in the following Parts:

Part 1:	"Overview";	
Part 2:	"Common Data Definitions";	
Part 3:	"Framework";	
Part 4:	"Call Control";	
	Sub-part 1: "Call Control Common Definitions";	
	Sub-part 2: "Generic Call Control SCF";	
	Sub-part 3: "Multi-Party Call Control SCF";	
	Sub-part 4: "Multi-Media Call Control SCF";	
	Sub-part 5: "Conference Call Control SCF";	(new in 3GPP Release 7)
Part 5:	"User Interaction SCF";	
Part 6:	"Mobility SCF";	
Part 7:	"Terminal Capabilities SCF";	
Part 8:	"Data Session Control SCF";	
Part 9:	"Generic Messaging SCF";	(not part of 3GPP Release 7)
Part 10:	"Connectivity Manager SCF";	(not part of 3GPP Release 7)
Part 11:	"Account Management SCF";	
Part 12:	"Charging SCF".	
Part 13:	"Policy Management SCF";	
Part 14:	"Presence and Availability Management SCF";	
Part 15:	"Multi Media Messaging SCF";	
Part 16:	"Service Broker SCF".	(new in Release 7)

The **Mapping specification of the OSA APIs and network protocols** (3GPP TR 29.998) is also structured as above. A mapping to network protocols is however not applicable for all Parts, but the numbering of Parts is kept. Also in case a Part is not supported in a Release, the numbering of the parts is maintained.

OSA API specifications 29.198-family						OSA API Mapping - 29.998-family	
29.198-01	Overview					29.998-01	Overview
29.198-02	Common Data Definitions					29.998-02	<i>Not Applicable</i>
29.198-03	Framework					29.998-03	<i>Not Applicable</i>
Call Control (CC) SCF	29.198-04-1	29.198-04-2	29.198-04-3	29.198-04-4	29.198-04-5	29.998-04-1	Generic Call Control – CAP mapping
	Common CC data definitions	Generic CC SCF	Multi-Party CC SCF	Multi-media CC SCF	Conf CC SCF	29.998-04-2	<i>Generic Call Control – INAP mapping</i>
						29.998-04-3	<i>Generic Call Control – Megaco mapping</i>
						29.998-04-4	Multiparty Call Control – ISC mapping
29.198-05	User Interaction SCF					29.998-05-1	User Interaction – CAP mapping
						29.998-05-2	<i>User Interaction – INAP mapping</i>
						29.998-05-3	<i>User Interaction – Megaco mapping</i>
						29.998-05-4	User Interaction – SMS mapping
29.198-06	Mobility SCF					29.998-06-1	User Status and User Location – MAP mapping
						29.998-06-2	User Status and User Location – SIP mapping
29.198-07	Terminal Capabilities SCF					29.998-07	<i>Not Applicable</i>
29.198-08	Data Session Control SCF					29.998-08	Data Session Control – CAP mapping
29.198-09	<i>Generic Messaging SCF</i>					29.998-09	<i>Not Applicable</i>
29.198-10	<i>Connectivity Manager SCF</i>					29.998-10	<i>Not Applicable</i>
29.198-11	Account Management SCF					29.998-11	<i>Not Applicable</i>
29.198-12	Charging SCF					29.998-12	<i>Not Applicable</i>
29.198-13	Policy Management SCF					29.998-13	<i>Not Applicable</i>
29.198-14	Presence & Availability Management SCF					29.998-14	<i>Not Applicable</i>
29.198-15	Multi-media Messaging SCF					29.998-15	<i>Not Applicable</i>
29.198-16	Service Broker SCF					29.998-16	<i>Not Applicable</i>

1 Scope

The present document is part 14 of the Stage 3 specification for an Application Programming Interface (API) for Open Service Access (OSA).

The OSA specifications define an architecture that enables application developers to make use of network functionality through an open standardised interface, i.e. the OSA APIs. The concepts and the functional architecture for the OSA are contained in 3GPP TS 23.198 [3]. The requirements for OSA are contained in 3GPP TS 22.127 [2].

The present document specifies the Presence and Availability Management Service Capability Feature (SCF) aspects of the interface. All aspects of the Presence and Availability Management SCF are defined here, these being:

- Sequence Diagrams
- Class Diagrams
- Interface specification plus detailed method descriptions
- State Transition diagrams
- Data Definitions
- IDL Description of the interfaces

The process by which this task is accomplished is through the use of object modelling techniques described by the Unified Modelling Language (UML).

This specification has been defined jointly between 3GPP TSG CT WG5, ETSI TISPAN and the Parlay Group, in co-operation with a number of JAIN™ Community member companies.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1] 3GPP TS 29.198-1: "Open Service Access; Application Programming Interface; Part 1: Overview".

[2] 3GPP TS 22.127: "Service Requirement for the Open Service Access (OSA); Stage 1".

[3] 3GPP TS 23.198: "Open Service Access (OSA); Stage 2".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in TS 29.198-1 [1] apply.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in TS 29.198-1 [1] apply.

4 Presence and Availability Management SCF

4.1 Introduction

The goal of these interfaces is to establish a standard for maintaining, retrieving and publishing information about

- Presence and Availability of entities for various forms of communication and the contexts in which they are available.

4.2 Motivation

Consider the following simple but desirable scenario for a communication service: An end-user wishes to receive instant messages from her management at any time on her mobile phone, from co-workers only on her desktop computer, and in certain cases for the messages to be forwarded to e-mail or even a fax machine/printer. The senders may know her availability for various forms of communication in the way she chooses to reveal it or alternatively the senders may never know how she will be receiving their messages. This scenario spans over multiple services and protocols and can only be solved currently by a proprietary solution that maintains the required information in an ad-hoc fashion within the application.

PAM is not a replacement for the protocols being standardized for various communication and network services. PAM attempts to standardize the management and sharing of presence and availability information across multiple services and networks.

The PAM specification is motivated by the observations that

- The notions of Identity, Presence and Availability are common to but independent of the various communication technologies, protocols and applications that provide services using these technologies.
- Presence does not necessarily imply availability. End-users or organizations require greater control over making themselves available through various communication devices.
- Presence based services need to address privacy concerns on who can access presence information and under what conditions.

Management of availability will span over multiple communication services and service providers.

4.3 Goals

The purpose of this document is to adopt the first release of a Presence and Availability Management interface specification created by an industry consortium, PAM forum, established for this purpose harmonized with the IETF model for presence (RFC 2778). This specification is also consistent with the ongoing work in 3GPP for defining the requirements and architecture for a standard presence service in the network.

With a desired goal of rapid acceptance and usage, the specification has been deliberately designed to be as simple as possible with an attempt to include a minimal set of functionality that is sufficient for use in non-trivial applications. Often, this has been at the cost of some useful features, which would have made the specification baroque and cumbersome if not controversial.

4.4 Concepts

This chapter briefly describes the various concepts involved in this specification to serve as the context for the rest of the document.

4.4.1 Identity

Identity, for purposes of the PAM specification, is a limited electronic representation of an entity (i.e., an individual or an organization) that participates in PAM-enabled applications and services. This concept corresponds to the concept of Presentity as described in the IETF Common Presence and Instant Messaging Model (RFC 2778).

The main characteristic of an entity that is central to PAM specifications is the name (or handle) by which entities are identified by applications and services. Entities may have multiple names, login ids, account names, etc., by which they are identified. As PAM attempts to abstract over multiple networks and services, it does not assume that a single name will necessarily identify entities across all application domains.

The generalized structure available in 3GPP for user names that may contain various formats for addressing has been adopted for these specifications.

To enable entities to be identified by any of the names associated with them, PAM identities can be assigned aliases. A name and a namespace pair can be defined as an alias of another name and namespace pair. It is important to note that aliases are just synonyms and hence have limited semantics. In particular, they are not powerful enough to model personas each with their own capabilities and privacy requirements.

An identity can represent a single entity or a group of identities. Group identities have similar semantics to non-group identities but, in addition, maintain a list of identities that constitute the group. As an example, a sales department may be modelled as a group identity with the identities of the members of the department being member identities of the group. Group identities and their member identities do not inherit anything from each other.

No other relationships between identities are within the scope of the PAM specifications.

For flexibility and extensibility, attribute lists are used to associate additional data with identities. Identities are typed to provide a way to manage such attribute lists. An identity type may be associated with a specific set of attributes and all identities of that type inherit instances of such attributes.

For consistency with IETF (RFC 2778) defined presence data models, PAM pre-defines an identity type Presentity with a list of presence attributes as defined in TS 22.141 based on the definitions in RFC 2778.

PAM implementations may map certain existing directory and database data to one or more types to allow access via PAM interfaces. PAM specifications do not specify how the data within the profiles are to be stored. They may be stored within the PAM implementation or mapped to data stored on external directories and databases.

4.4.2 Presence

The concept of presence has been used in several application areas, being most explicit in Instant Messaging. Starting from a simple notion of online/offline status, it has expanded to include other context information around the status such as disposition (out to lunch, away from the computer, etc.) and activity status (on the phone, idle, etc.). Location information, on the other hand, has largely been kept separate from what has been traditionally considered presence information. PAM specifications broaden the concepts of presence recognizing that all such information, including location, describes different contexts of an entity's existence. The unifying property is that the presence information is continually changing and that there is value in knowing the current information at different points in time for services and applications.

For the purposes of PAM specifications, presence is an extensible set of characteristics that captures the dynamic context in which an identity or an agent exists at any point in time. In contrast to the relatively static information about identities or agents (e.g., names, addresses, capabilities), presence refers to dynamic information such as location, status, disposition, etc. Registrations of presence and location information in existing applications are covered by this definition.

Presence information is differentiated from the more static information associated with identities and agents that are stored in attributes. The rationalization for this design is that the presence information is dynamic and has implications on the implementation. Some of the presence information is too dynamic to be maintained in static data stores such as directories and without this hint about the data characteristics, PAM implementers may make sub-optimal decisions on the way the data is stored. Second, presence information typically has expiration data that needs to be understood by the implementation.

The PAM specification recognizes that devices that provide presence information are not necessarily devices that communicate.

The PAM specification does not specify the methods by which the presence information is derived. For example, an instant messaging client on a desktop computer can register its status based on when a user is logged in. A mobile phone may do an explicit registration on a WAP server for instant messaging. The phone's presence for voice calls, on the other hand, may be inferred implicitly by querying the cellular network for the device being on when requested. The presence of an identity, on the other hand, may be computed using presence information from one or more devices owned by the identity.

Finally, the PAM specification does not require that the presence information be stored explicitly (i.e., in a materialized fashion) in a PAM implementation. An implementation may infer the presence information on demand from the underlying services or networks.

For compatibility with the presence model from IETF (RFC 2778), a type called Presentity is pre-defined with the attributes consistent with the IETF Presence model.

4.4.3 Availability

Availability is a property of an identity denoting its ability and willingness to share information about itself or to communicate with another identity based on factors such as the type of communication requested, the identity of the calling entity and the preferences and policies that are associated with the recipient. This is the primary means by which the current PAM specification enables controls for privacy. While presence is, in most applications, a necessity for availability, presence does not necessarily imply availability to all.

Availability is always with respect to a context. A context in PAM specifications is a set of attributes defining the state in which the availability is requested. For example, the query "Is Jane available for IM for Rob?" identifies the type of communication and the identity of the asker as the context. PAM allows for availability to be differentiated based on any attribute of a context. A context, "Communication" is pre-defined in PAM.

Most queries for presence in existing applications can be mapped into PAM availability queries to control the information being given out. Alternatively, queries can be mapped directly into PAM presence queries in situations where privacy controls and policies are not required or all presence data is open to the entity querying. This allows PAM specifications to be consistent with existing presence servers and to serve as the basis for presence services across multiple protocols while providing uniform and flexible privacy controls.

PAM specification does not specify whether the availability is computed on demand or stored explicitly. In some applications, the availability may be pre-computed and stored explicitly while in some, it may be computed at each request for availability.

While the PAM specification provides a mechanism to associate preferences with an Identity to control availability, it neither specifies the syntax and semantics of the preferences nor the process by which the availability is computed. These aspects are left to the implementation.

For example, a particular implementation may provide the facility to store preferences as rules such as "I prefer to receive my instant messages on my computer rather than my cell phone unless the message is from my boss or the computer is off, etc.".

As an example, a computation of availability for communication may consist of the following algorithm:

- 1) Find all devices of the identity being called that are capable of the specified form of communication AND have registered their presence status as available.
- 2) Evaluate the rules associated with the identity being called to select the preferred device(s) from the set of present devices determined in Step 1.
- 3) If there are any devices available satisfying Step 2, indicate the availability of the identity being called via the available devices.

An implementation can choose to provide one or more means to specify preferences. It is expected that if there is industry standardization on the specification of preferences, the implementations will support such a standard. This is currently outside the scope of PAM.

4.4.4 Events

Events are representations of certain identified occurrences related to the concepts described above. The PAM specification provides for registering interest (i.e., callbacks) in being notified of such occurrences. Any entity that subscribes to the Event is a “watcher” in the IETF terminology (RFC 2778). An implementation is expected to provide such notifications.

Examples of events include,

- Creation/deletion of an identity.
- Change in the presence information of an identity
- Change in availability of an identity for a particular form of communication

PAM specifications contain a set of pre-defined events. Each event is defined by a name of the event, a set of input attribute value pairs that must be provided when an event is registered for and a set of attribute value pairs that are included in the notifications sent out when the event of interest occurs.

4.5 Scope of PAM information

Presence and Availability Management has the following types of information in its scope:

- Identities, which consist of names and aliases of entities participating in communications.
- Presence information, which consists of an identity’s dynamic characteristics such as status and geographical location.
- Availability information, which consists of preferences associated with identities and computation of availability, based on the devices present and the current preferences.
- Notification of changes to the above pieces of information.
- Security issues for access to this information.

The PAM specification consists of interfaces to manage or access the above information.

The specification purposefully does not include

- Storage design or storage requirements for any of the presence and availability information.

These are to be decided by specific implementations of the PAM specification.

4.6 Security and privacy

As the Presence and Availability Management interface is designed to share information across administrative domains and to facilitate availability computation based on the identity of the entity desiring communication, security and privacy issues are addressed in the design. Two of the issues considered to be within the scope of PAM are:

- Access control to an implementation of the PAM specification.
- Use of an authenticated entity’s credentials by methods in the specification.

To understand the distinction between the first two issues, consider, for example, an end-user that logs on to an Instant Messaging client and wishes to send a message. The client (or a gateway to which the client talks to) may access a PAM implementation to determine the availability of the destination for the message. The client (or the gateway) will need to be authorized for access to the PAM implementation independent of the user that logs in. A gateway may, in fact, do this access on behalf of a number of clients and, for performance reasons, wish to authenticate itself just once on start up rather than at each invocation. This authentication is handled by the authentication mechanisms in the OSA Framework common to all services within OSA.

Second, each invocation of a particular method will need to contain the credentials of the end-user that logged into the client so that the computation of the availability can take that into account when necessary for privacy issues.

It should be noted that the PAM specification allows for the possibility that the authentication of the end-users is not necessarily done within the PAM implementation itself. As long as the authenticated credentials supplied by the client (or gateway) are acceptable for validation and the client (or the gateway) itself is authenticated by the implementation, the authentication of end-users can occur anywhere outside the PAM implementation. A deployment scenario for a particular application is that one or more authentication services are provided as external services over PAM implementations.

This design does not preclude the possibility that the client (or the gateway) cannot be authenticated. Therefore, the credentials supplied by the client (or the gateway) may be held to stronger authentication criterion than credentials supplied by a trusted client (or gateway).

Finally, the PAM specification does not mandate the use of authentication within an implementation if the environment in which it is used does not require it.

Clause 5.1 explains the mechanism for providing data about the asker to each of the methods with a sequence diagram.

Privacy issues are addressed primarily by providing a mechanism to control the information flowing out of a PAM implementation based on whatever criterion the end user may choose to specify in the availability preferences and independent of any particular application.

The following security issues were considered to be outside the scope of PAM:

- Authentication of the identity of the end-users or entities. As explained above, this authentication may be provided by a third-party authentication service or it may occur through an authentication service written over the PAM platform. The only requirement is that the type of credentials supplied by the authentication service be acceptable to the PAM platform implementation being accessed.
- Encryption of the flow of information between a PAM platform implementation and clients of this implementation. This is dependent on the method of access to the interface which is outside the scope of the PAM specification and hence to be determined by the implementation.

5 Sequence Diagrams

Most of the methods in the PAM interfaces are independently used to query or update presence and availability related information with no transactions or state transitions involved. There are two use cases for which sequence diagrams are useful

- Acquiring and using authentication tokens
- Registering for PAM events and getting notifications on the occurrence of the event.

The sequence diagrams for these two cases are provided below. It is assumed that the authentication with the OSA framework has already occurred and the application has access to the PAM interfaces.


5.1 Use of authentication tokens

As an OSA Service, PAM uses the authentication features of the OSA Framework to provide access control to the PAM interfaces. In addition, PAM provides an optional mechanism for service/application level identification and authentication of the entity requesting the operation or alternatively on whose behalf the operation is being requested. To handle privacy requirements, the results of presence and availability data updates or queries are dependent on the entity requesting the operations.

In the simplest case, the entity authenticating to the OSA Framework to get access to the service interface is the entity requesting the operation. In general, however, a proxy or an application (such as a messaging server or a conferencing server) may authenticate with the OSA Framework once and then check for presence and availability on behalf of multiple client applications (such as instant messaging clients). The credential of these client applications if and when needed by the PAM service can then be provided via the credential parameter in each of the interface methods.

The mechanism to provide the asker data is via the optional parameter of type TpPAMCredential in each of the methods. Supplying the entire asker data in each of the methods is expensive for an implementation since it will need to parse and validate the data supplied in the asker data structure each time. An application may be accessing multiple methods for itself or for the benefit of end user(s) and will need to supply the relevant asker data in each case. To make the consideration of asker data more efficient, the application uses the getAuthToken() method in each of the managers in the SCFs once for each session per asker and gets a credential that can be reused as many times as necessary in the same session to represent the same asker.

The sequence diagram for an example usage is given below.

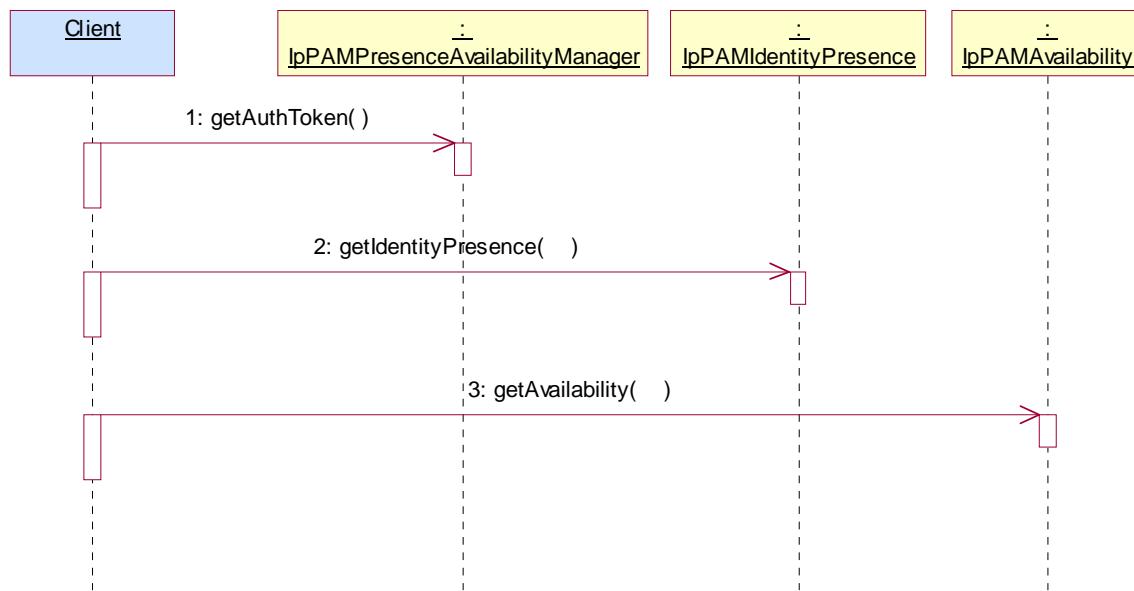


- 1: For any unique entity requesting the operation, the authenticated client of the OSA PAM service, requests for an authentication token using the getAuthToken() method in the PresenceAvailability Manager interface.
- 2: The token returned by the getAuthToken() method is used as the credential parameter of the getIdentityPresence() request.
- 3: The same token is used as the credential parameter of the getAvailability() request(). An authorization token can be used multiple times within the same session established with OSA framework.

5.2 Event registration and notification

An OSA client can register for certain events in the PAM service either for itself or on behalf of its own clients. The client will register one or more application interfaces with the event management service and then activate one or more events for each such registered interface.

The sequence diagram for an example usage is given below.

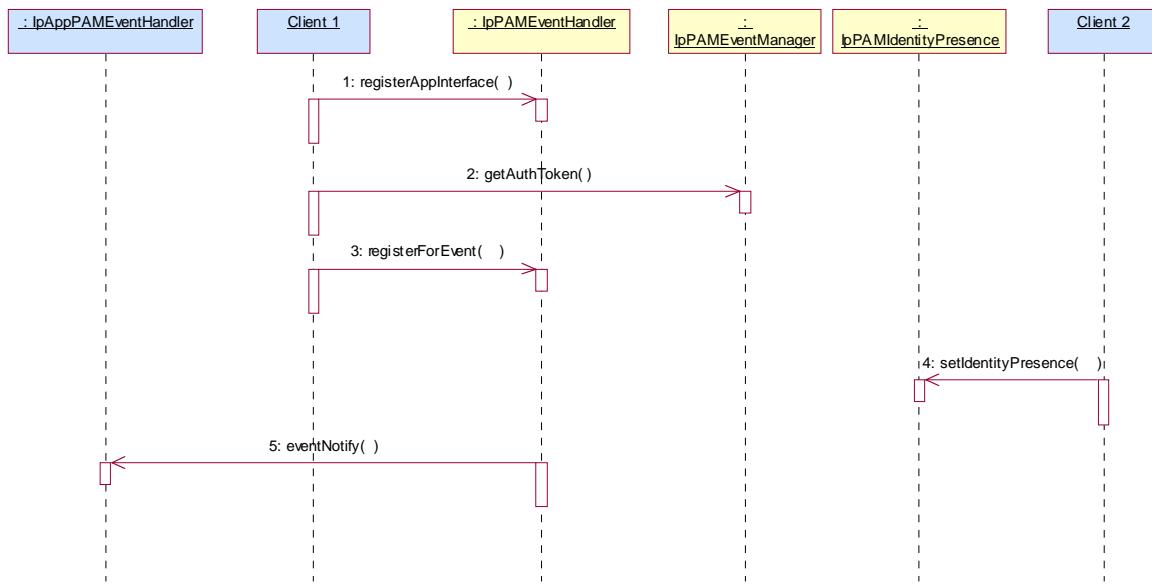

- 1: The client uses the registerAppInterface() method to register its notification interface. The getAuthToken() can be null since the client is doing this registration on its own behalf. The client gets a unique client ID back.
- 2: The client uses the getAuthToken() to get authentication credentials for its own application client on behalf of whom an event registration is required.
- 3: The client uses the registerForEvent() method to register for a change in availability event on behalf of its own client. The client gets a unique event ID back.
- 4: The presence information for an identity of interest in 3 above is changed by another client application acting on its behalf using the setIdentityPresence() method.
- 5: When the change in presence results in a change in the availability of the identity for the client that has registered for the availability change, a notification is sent out using the previously registered application interface.

6 Class Diagrams

PAM consists of the following SCFs:

- PAM Provisioning Service consisting of Interfaces to provision identities, agents and relationships between them
- PAM Access Service consisting of interfaces to view and update presence and availability information and
- PAM EventManagement Service consisting of interfaces to subscribe to events in PAM and be notified of such events.

6.1 PAM Provisioning SCF Class Diagrams

PAM Provisioning Service contains the following service interfaces. It contains no application interfaces.

IpPAMIdentityManagement

- The purpose of this interface is to manage subscriber names, aliases, groups and sets of attributes called Profiles associated with subscribers.

IpPAMAgentManagement

- The purpose of this interface is to manage agent (that models a hardware or software device) names, communication capabilities and sets of attributes called Profiles associated with agents.

IpPAMAgentAssignment

- The purpose of this interface is to manage the relationship between identities and the agents assigned to them.

IpPAMIdentityTypeManagement

IpPAMAgentTypeManagement

IpPAMCapabilityManagement

- These three interfaces allow for definitions of identity types, agent types and agent capabilities used for presence and availability management.

The interfaces and the relationships between them are shown in the figure below.

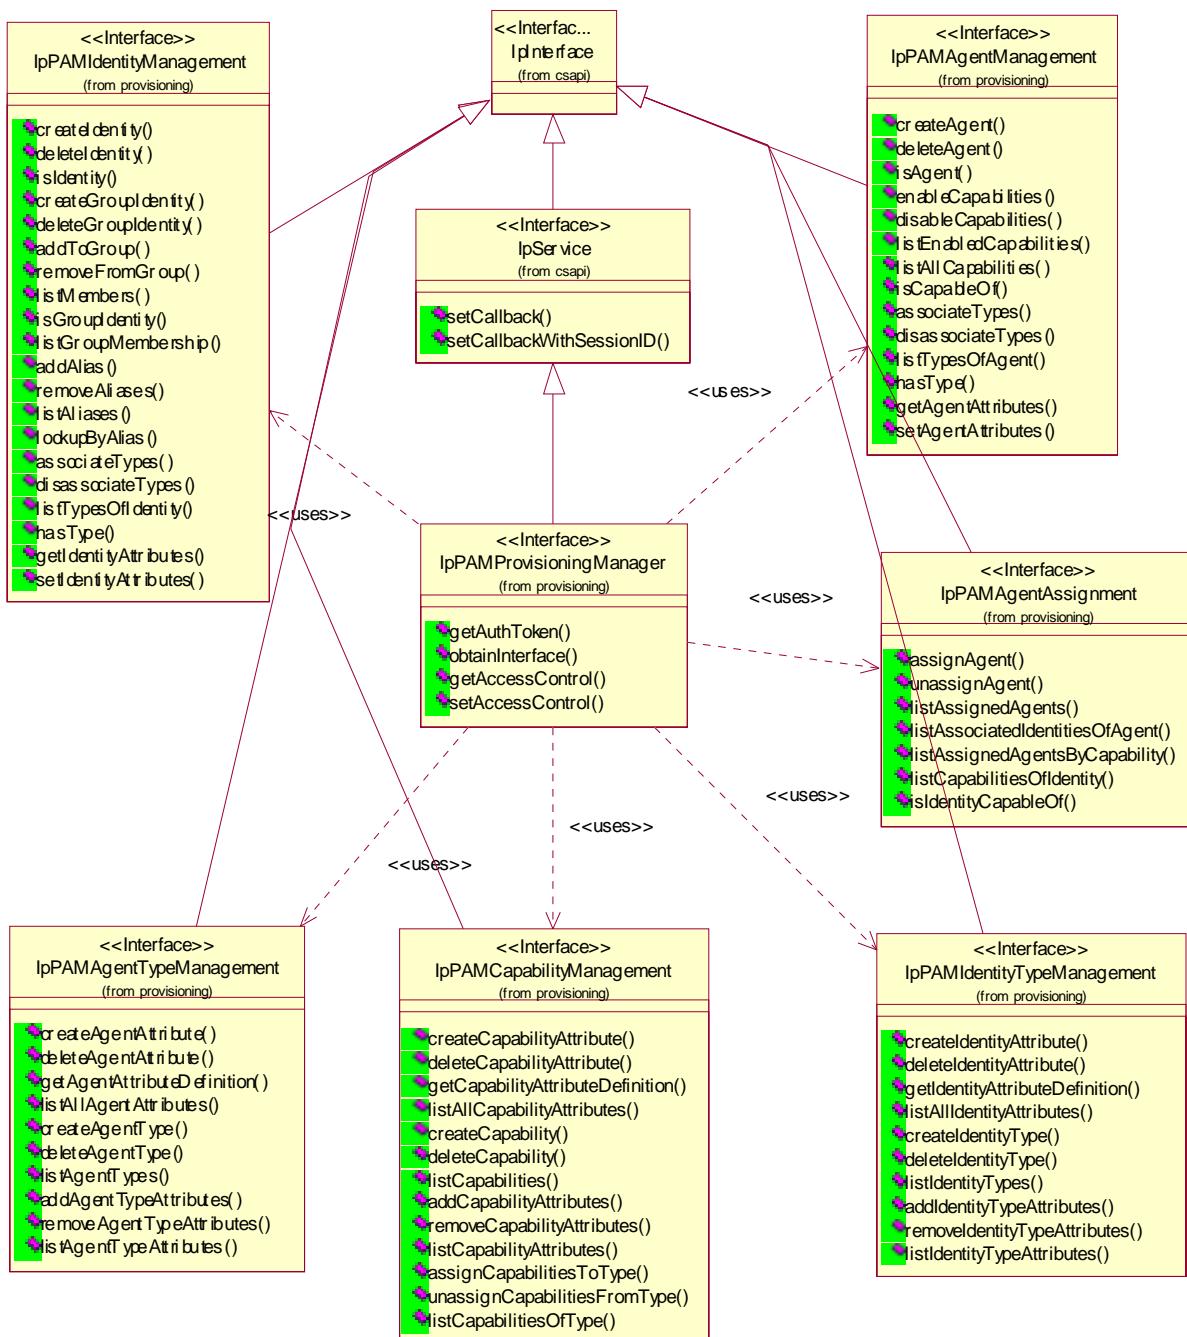


Figure: PAM Provisioning Service

6.2 PAM Access SCF Class Diagrams

The PAM Access service consists of two packages, one for the application interfaces and one for the service interfaces. The application PAM Access package consists of 0 or more instances of the IpAppPAMPreferenceCheck interface and the PAM event management service package consists of a single instance of the following interfaces obtainable by applications using the service interface IpPAMPresenceAvailabilityManager.

IpPAMAgentPresence

- The purpose of this interface is to maintain the dynamic presence information of agents.

IpPAMIdentityPresence

- The purpose of this interface is to maintain the dynamic presence information of identities.

IpPAMAvailabilityManagement

- The purpose of this interface is to (i) Manage the preferences specified for the availability of an identity (ii) Query for the availability of identities for specific capabilities.

The interfaces and the relationships between them are shown in the figure below.

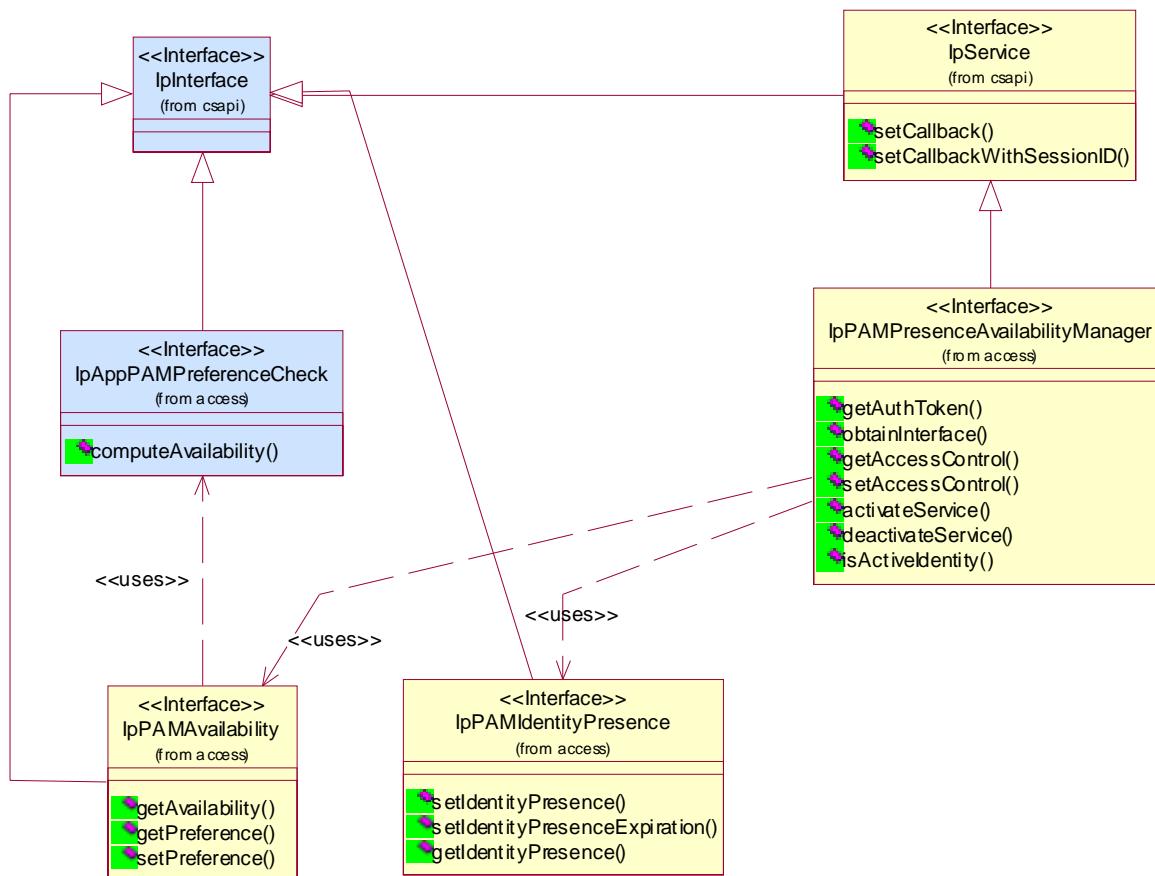


Figure: PAM Access Service

6.3 PAM Event SCF Class Diagrams

The PAM Event Management service consists of two packages, one for the application interfaces and one for the service interfaces. The application PAM event management package consists of 0 or more instances of the **IpAppPAMEventHandler** interface and the PAM event management service package consists of a single instance of the **IpPAMEventHandler** interface. This interface can be obtained by application using the service interface **IpPAMEventManager**.

The figure below shows the interfaces of PAM Event Management and the relationships between them.

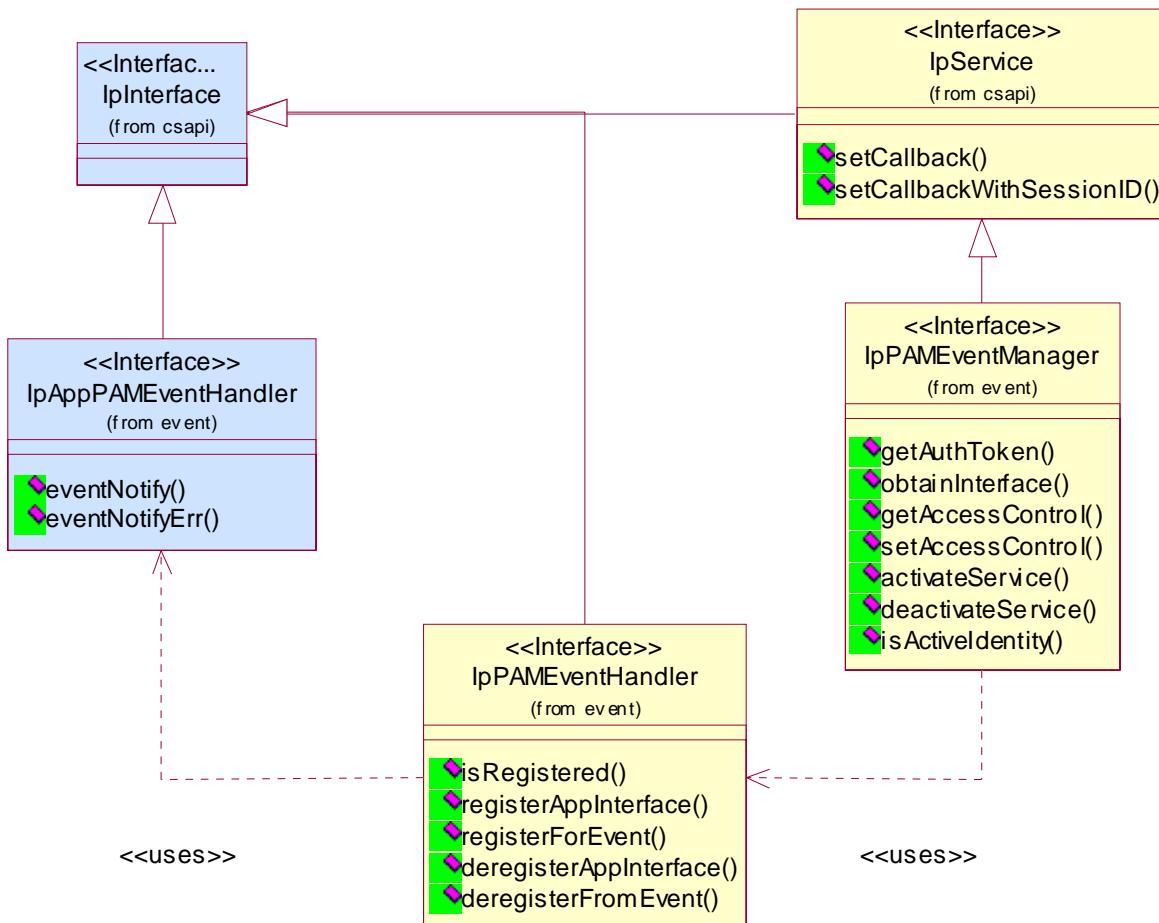


Figure: PAM Event Management Service

7 The Service Interface Specifications

7.1 Interface Specification Format

This clause defines the interfaces, methods and parameters that form a part of the API specification. The Unified Modelling Language (UML) is used to specify the interface classes. The general format of an interface specification is described below.

7.1.1 Interface Class

This shows a UML interface class description of the methods supported by that interface, and the relevant parameters and types. The Service and Framework interfaces for enterprise-based client applications are denoted by classes with name `Ip<name>`. The callback interfaces to the applications are denoted by classes with name `IpApp<name>`. For the interfaces between a Service and the Framework, the Service interfaces are typically denoted by classes with name `IpSvc<name>`, while the Framework interfaces are denoted by classes with name `IpFw<name>`.

7.1.2 Method descriptions

Each method (API method “call”) is described. Both synchronous and asynchronous methods are used in the API. Asynchronous methods are identified by a ‘Req’ suffix for a method request, and, if applicable, are served by asynchronous methods identified by either a ‘Res’ or ‘Err’ suffix for method results and errors, respectively. To handle responses and reports, the application or service developer must implement the relevant `IpApp<name>` or `IpSvc<name>` interfaces to provide the callback mechanism.

7.1.3 Parameter descriptions

Each method parameter and its possible values are described. Parameters described as ‘in’ represent those that must have a value when the method is called. Those described as ‘out’ are those that contain the return result of the method when the method returns.


7.1.4 State Model

If relevant, a state model is shown to illustrate the states of the objects that implement the described interface.

7.2 Base Interface

7.2.1 Interface Class `IpInterface`

All application, framework and service interfaces inherit from the following interface. This API Base Interface does not provide any additional methods.

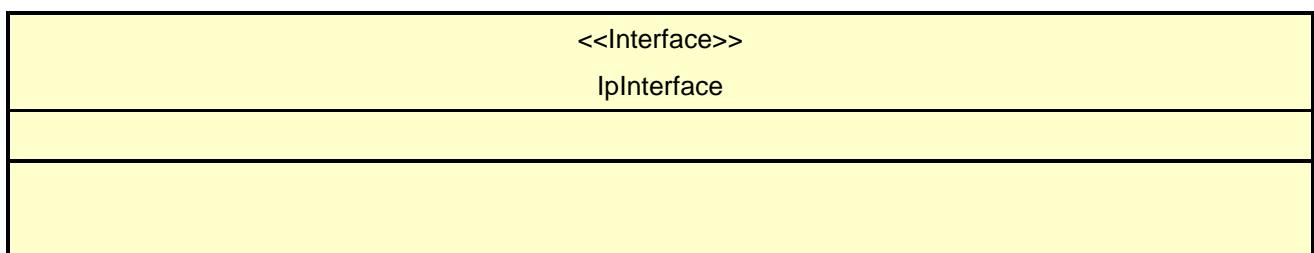

7.3 Service Interfaces

7.3.1 Overview

The Service Interfaces provide the interfaces into the capabilities of the underlying network - such as call control, user interaction, messaging, mobility and connectivity management.

The interfaces that are implemented by the services are denoted as ‘Service Interface’. The corresponding interfaces that must be implemented by the application (e.g. for API callbacks) are denoted as ‘Application Interface’.

7.4 Generic Service Interface

7.4.1 Interface Class `IpService`

Inherits from: `IpInterface`

All service interfaces inherit from the following interface.

<p style="text-align: center;"><<Interface>></p> <p style="text-align: center;">IpService</p>
<p>setCallback (appInterface : in IpInterfaceRef) : void</p> <p>setCallbackWithSessionID (appInterface : in IpInterfaceRef, sessionID : in TpSessionID) : void</p>

7.4.1.1 Method setCallback()

This method specifies the reference address of the callback interface that a service uses to invoke methods on the application. It is not allowed to invoke this method on an interface that uses SessionIDs. Multiple invocations of this method on an interface shall result in multiple callback references being specified. The SCS shall use the most recent callback interface provided by the application using this method. In the event that a callback reference fails or is no longer available, the next most recent callback reference available shall be used.

Parameters

appInterface : in IpInterfaceRef

Specifies a reference to the application interface, which is used for callbacks.

Raises

TpCommonExceptions, P_INVALID_INTERFACE_TYPE

7.4.1.2 Method setCallbackWithSessionID()

This method specifies the reference address of the application's callback interface that a service uses for interactions associated with a specific session ID: e.g. a specific call, or call leg. It is not allowed to invoke this method on an interface that does not use SessionIDs. Multiple invocations of this method on an interface shall result in multiple callback references being specified. The SCS shall use the most recent callback interface provided by the application using this method. In the event that a callback reference fails or is no longer available, the next most recent callback reference available shall be used.

Parameters

appInterface : in IpInterfaceRef

Specifies a reference to the application interface, which is used for callbacks.

sessionID : in TpSessionID

Specifies the session for which the service can invoke the application's callback interface.

Raises

`TpCommonExceptions, P_INVALID_SESSION_ID, P_INVALID_INTERFACE_TYPE`

8 Presence and Availability Management Interface Classes

PAM consists of the following SCFs

- PAM Provisioning Service
- PAM Access Service
- PAM Event Service

The PAM Provisioning service consists of the Identity Management, Agent Management, Agent Assignment, Agent Type Management, Identity Type Management and Capability Management interfaces.

The PAM Access service consists of the identity presence and availability interfaces.

The Event service consists of the Event Management interfaces.

An implementation of this API which supports or implements a method described in the present document, shall support or implement the functionality described for that method, for at least one valid set of values for the parameters of that method. Where a method is not supported by an implementation of a Service interface, the exception `P_METHOD_NOT_SUPPORTED` shall be returned to any call of that method.

8.1 PAM Provisioning SCF Interface Classes

This service consists of interfaces to provision identities, agents and the relationships between them.

8.1.1 Interface Class IpPAMProvisioningManager

Inherits from: `IpService`.

The purpose of this interface is to supply the various interfaces available in this service to the application and to provide the authentication credentials. This interface is the only discoverable interface from the framework.

All PAM methods use an authentication token as a parameter since the outcome of the operations may depend on the entity requesting the operation. To enable this, the `getAuthToken()` method is used to obtain an implementation dependent token. An application that has authenticated itself with the OSA framework, can get an authentication token for itself. Alternatively, if the application is requesting PAM operations on behalf of multiple entities, authentication tokens may be requested for each such entity after providing any available data about the asker. These tokens can then be used repeatedly for operations within a session without further need to identify the asker.

<>Interface>> IpPAMProvisioningManager getAuthToken (askerData : in TpAttributeList) : TpPAMCredential obtainInterface (interfaceName : in TpPAMProvisioningInterfaceName) : IPIInterfaceRef getAccessControl (identity : in TpPAMFQName, authToken : in TpPAMCredential) : TpPAMAccessControlData setAccessControl (identity : in TpPAMFQName, operation : in TpPAMPreferenceOp, newAccessControl : in TpPAMAccessControlData, authToken : in TpPAMCredential) : void
--

8.1.1.1 Method getAuthToken()

Get an authentication token for access to the interface methods.

Returns an implementation-dependent authentication credential that can be verified.

Parameters

askerData : in TpAttributeList

Specifies information about the asker. Can be an empty array. The exact attributes in this list are dependent on the application. PAM reserves the attribute "name" with type TpPAMFQName to contain the identity of the asker if known.

Returns

TpPAMCredential

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.1.1.2 Method obtainInterface()

Obtain available interfaces from the service. The valid parameters for this method can be obtained from the service property P_OBTAINABLE_INTERFACES.

Returns the requested interface.

Parameters

interfaceName : in TpPAMProvisioningInterfaceName

Specifies the name of the required interface.

Returns

IpInterfaceRef

Raises

TpCommonExceptions, P_PAM_UNAVAILABLE_INTERFACE

8.1.1.3 Method getAccessControl()

Get the access control associated with the data belonging to an identity. The data associated with an identity includes the static and dynamic attributes of an identity as well as data about agents associated with an identity.

This method should be used in conjunction with the setAccessControl method.

Returns the access control if previously specified for the identity. Is null if there is no access control associated.

Parameters

identity : in TpPAMFQName

Specifies the identity of interest.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMAccessControlData

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.1.1.4 Method setAccessControl()

Set the access controls for the data associated with the specified identity. If the identity is Null, the access control is set for all identities (if authorized to do so). The data associated with an identity includes the static and dynamic attributes of an identity as well as data about agents associated with an identity.

Any existing access control will be modified based on the operation.

If the new access control is specified as Null for replace operation , an existing access control will be removed.

Parameters

identity : in TpPAMFQName

Specifies the identity of interest.

operation : in TpPAMPreferenceOp

Specifies the operation to be performed with the specified preference.

newAccessControl : in TpPAMAccessControlData

Specifies the access controls to add.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

`TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL`

8.1.2 Interface Class IpPAMIdentityManagement

Inherits from: `IpInterface`.

The purpose of this interface is to manage end-user or entity names, aliases, groups and sets of attributes associated with identities. An implementation may map these methods to operations on existing directories or databases. Some implementations may choose to provide a read-only access to the identity information.

The names of identities within a namespace must be unique. Each implementation exports an identifier as the default namespace that it serves. The identity name and the namespace may be used as an alias to another identity in a different namespace.

Aliases are associated with a given identity or group identity. Aliases must be uniquely assigned. In other words, two identities may not share the same alias.

This interface is meant for use by provisioning applications that establish and maintain identity names.

<p style="text-align: center;"><<Interface>></p> <p style="text-align: center;">IpPAMIdentityManagement</p>
<pre> createIdentity (identity : in TpPAMFQName, identityTypes : in TpStringList, authToken : in TpPAMCredential) : void deleteIdentity (identity : in TpPAMFQName, authToken : in TpPAMCredential) : void isIdentity (identity : in TpPAMFQName, authToken : in TpPAMCredential) : TpBoolean createGroupIdentity (identity : in TpPAMFQName, identityTypes : in TpStringList, authToken : in TpPAMCredential) : void deleteGroupIdentity (identity : in TpPAMFQName, authToken : in TpPAMCredential) : void addToList (group : in TpPAMFQName, member : in TpPAMFQName, authToken : in TpPAMCredential) : void removeFromList (group : in TpPAMFQName, identity : in TpPAMFQName, authToken : in TpPAMCredential) : void listMembers (identity : in TpPAMFQName, authToken : in TpPAMCredential) : TpPAMFQNameList isGroupIdentity (identity : in TpPAMFQName, authToken : in TpPAMCredential) : TpBoolean listGroupMembership (identity : in TpPAMFQName, authToken : in TpPAMCredential) : TpPAMFQNameList addAlias (identity : in TpPAMFQName, alias : in TpPAMFQName, authToken : in TpPAMCredential) : void removeAliases (identity : in TpPAMFQName, alias : in TpPAMFQName, authToken : in TpPAMCredential) : void listAliases (identity : in TpPAMFQName, authToken : in TpPAMCredential) : TpPAMFQNameList lookupByAlias (alias : in TpPAMFQName, authToken : in TpPAMCredential) : TpPAMFQName associateTypes (identity : in TpPAMFQName, identityTypes : in TpStringList, authToken : in TpPAMCredential) : void disassociateTypes (identity : in TpPAMFQName, identityTypes : in TpStringList, authToken : in TpPAMCredential) : void listTypesOfIdentity (identity : in TpPAMFQName, authToken : in TpPAMCredential) : TpPAMFQNameList hasType (identity : in TpPAMFQName, typeName : in TpString, authToken : in TpPAMCredential) : TpBoolean getIdentityAttributes (identity : in TpPAMFQName, identityType : in TpString, attributeNames : in TpStringList, authToken : in TpPAMCredential) : TpPAMAttributeList setIdentityAttributes (identity : in TpPAMFQName, identityType : in TpString, attributes : in TpPAMAttributeList, authToken : in TpPAMCredential) : void </pre>

8.1.2.1 Method createIdentity()

Create a new non-Group Identity with the specified name. Names must be unique across both group identities and non-group identities. Names must be unique across types within a namespace.

Parameters

identity : in TpPAMFQName

Specifies the Identity to be created.

identityTypes : in TpStringList

Specifies the identity's associated types. Can be an empty array.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

**TpCommonExceptions, P_PAM_IDENTITY_EXISTS, P_PAM_UNKNOWN_TYPE,
P_PAM_INVALID_CREDENTIAL**

8.1.2.2 Method deleteIdentity()

Delete the specified identity and all its related data. Upon successful completion, associated aliases and attribute instances are deleted from the system. The identity is also removed from all groups of which the identity is a member.

Parameters

identity : in TpPAMFQName

Specifies the Identity to be deleted.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.1.2.3 Method isIdentity()

Check if the specified non-group Identity exists. The method returns false for group identities.

Returns true if an identity with the specified name exists and false otherwise.

Parameters

identity : in TpPAMFQName

Specifies the Identity to be checked.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpBoolean

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.1.2.4 Method createGroupIdentity()

Create a new Group Identity with the specified name. Name must be unique across both group identities and non-group identities. Names must be unique across the same types.

Parameters

identity : in TpPAMFQName

Specifies the group Identity to be created.

identityTypes : in TpStringList

Specifies the group's associated types. Can be an empty array.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

**TpCommonExceptions, P_PAM_IDENTITY_EXISTS, P_PAM_UNKNOWN_TYPE,
P_PAM_INVALID_CREDENTIAL**

8.1.2.5 Method deleteGroupIdentity()

Delete the specified group identity and all its related data. Upon successful completion, associated aliases and attribute instances are deleted from the system. The identity is also removed from all groups of which the identity is a member. The member identities of the group are not deleted.

Parameters

identity : in TpPAMFQName

Specifies the group Identity to be deleted.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.1.2.6 Method addToGroup()

Add an existing identity to a group identity. Both the group identity and the member identity to be added must have been created before this operation can be invoked. A member identity can be a group identity. Implementation must not allow cycles in memberships.

Parameters

group : in TpPAMFQName

Specifies the group Identity to which the member will be added.

member : in TpPAMFQName

Specifies the identity to be added as a member of the group.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

**TpCommonExceptions, P_PAM_MEMBER_EXISTS, P_PAM_UNKNOWN_GROUP,
P_PAM_UNKNOWN_MEMBER, P_PAM_IS_CYCLIC, P_PAM_INVALID_CREDENTIAL**

8.1.2.7 Method removeFromGroup()

Remove an existing identity from the membership of a group identity.

Parameters

group : in TpPAMFQName

Specifies the Group Identity from which the member will be removed.

identity : in TpPAMFQName

Specifies the Identity to be removed as a member of the group.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

**TpCommonExceptions, P_PAM_NOT_MEMBER, P_PAM_UNKNOWN_GROUP,
P_PAM_UNKNOWN_MEMBER, P_PAM_INVALID_CREDENTIAL**

8.1.2.8 Method listMembers()

List the members of the specified group Identity.

Returns a list of members of the specified group Identity. An empty list is returned if the identity has no members.

Parameters

identity : in TpPAMFQName

Specifies the group Identity whose members are required.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMFQNameList

Raises

TpCommonExceptions, P_PAM_UNKNOWN_GROUP, P_PAM_INVALID_CREDENTIAL

8.1.2.9 Method isGroupIdentity()

Check if the specified group identity exists. The method returns false for non-group identities.

Returns true if a group identity with the specified name exists, false otherwise.

Parameters

identity : in TpPAMFQName

Specifies the Identity to be checked.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpBoolean

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.1.2.10 Method listGroupMembership()

List the Group Identities the specified Identity is a member of.

Returns a list of all groups the specified Identity is member of. An empty list is returned if the identity is not member of any group.

Parameters

identity : in TpPAMFQName

Specifies the Identity to be looked up.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMFQNameList

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.1.2.11 Method addAlias()

Add an alias in the specified namespace to an existing Identity. The alias domain name must be specified in Alias parameter. The identity can be a group identity.

Parameters

identity : in TpPAMFQName

Specifies the Identity to which the alias will be added.

alias : in TpPAMFQName

Specifies the alias to be added.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_ALIAS_EXISTS, P_PAM_ALIAS_NOT_UNIQUE, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.1.2.12 Method removeAliases()

Remove the specified alias from an existing identity.

Parameters

identity : in TpPAMFQName

Specifies the Identity from which the alias will be deleted.

alias : in TpPAMFQName

Specifies the alias to be deleted.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_UNASSIGNED_ALIAS, P_PAM_INVALID_CREDENTIAL

8.1.2.13 Method listAliases()

List the aliases of the specified Identity.

Returns a list containing all aliases to the specified Identity. A list with zero elements is returned if there are no aliases associated with the identity.

Parameters

identity : in TpPAMFQName

Specifies the Identity to be looked up.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMFQNameList

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.1.2.14 Method lookupByAlias()

Find the identity with the specified alias in the specified alias domain.

Returns the identity that has the specified alias. Returns null if the alias is not assigned to any identity.

Parameters

alias : in TpPAMFQName

Specifies the alias to be looked up.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMFQName

Raises

TpCommonExceptions, P_PAM_UNKNOWN_ALIAS, P_PAM_INVALID_CREDENTIAL

8.1.2.15 Method associateTypes()

Associate an identity instance with the specified types. The identity will be associated with instances of any attributes defined with each type. The initial values of the attributes will be as specified in the definition of the type attributes.

*Parameters***identity : in TpPAMFQName**

Specifies the name of the identity.

identityTypes : in TpStringList

Specifies the names of the type to be associated.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

*Raises***TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_UNKNOWN_TYPE,
P_PAM_TYPE_ASSOCIATED, P_PAM_INVALID_CREDENTIAL****8.1.2.16 Method disassociateTypes()**

Remove the association of a type with an identity instance. The definition of the type itself remains unaffected and the types may continue to be associated with other identities.

*Parameters***identity : in TpPAMFQName**

Specifies the identity.

identityTypes : in TpStringList

Specifies the names of the types to be removed.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

*Raises***TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_DISASSOCIATED_TYPE,
P_PAM_INVALID_CREDENTIAL****8.1.2.17 Method listTypesOfIdentity()**

List the types associated with the specified Identity.

Returns a list containing all types associated with the specified Identity. A list with zero elements is returned if there are no types associated with the identity.

*Parameters***identity : in TpPAMFQName**

Specifies the Identity to be looked up.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMFQNameList

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.1.2.18 Method hasType()

Check if the specified identity has the named type associated with it.

Returns true if an identity with the specified name has the named type associated with it, false otherwise.

Parameters

identity : in TpPAMFQName

Specifies the Identity to be checked.

typeName : in TpString

Specifies the type to be checked for.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpBoolean

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.1.2.19 Method getIdentityAttributes()

Return the attributes associated with the identity. If the identity type is not specified, all associated types are assumed to be of interest.

The return value contains the list of specified attributes and their values. If the attributes parameter is an empty array, all attributes in the named identity are output.

Parameters

identity : in TpPAMFQName

Specifies the Identity whose attributes are to be accessed.

identityType : in TpString

Specifies the type of the identity with which the required attributes are associated. Is optional.

attributeNames : in TpStringList

List of attributes of interest. Can be an empty array.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMAttributeList

Raises

**TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_UNKNOWN_TYPE,
P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL**

8.1.2.20 Method setIdentityAttributes()

Modify the attributes associated with the named Identity. The input may contain a subset of the attributes of the named type. Only the specified attributes will be modified and the rest will remain unchanged. If the type is unspecified, any associated type will be assumed.

Parameters

identity : in TpPAMFQName

Specifies the Identity.

identityType : in TpString

Specifies the type of the identity for the operation. Is optional.

attributes : in TpPAMAttributeList

Contains the list of attributes and their values.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

**TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_UNKNOWN_TYPE,
P_PAM_UNKNOWN_ATTRIBUTES, P_PAM_INVALID_CREDENTIAL**

8.1.3 Interface Class IpPAMAgentManagement

Inherits from: IpInterface.

The purpose of this interface is to manage agent (that models a hardware or software device) names, communication capabilities and sets of attributes associated with agents. An implementation may map these methods to operations on existing directories or databases. Some implementations may choose to provide a read-only access to the agent information.

Data associated with an agent is captured in attributes associated with types. An implementation may map different type attributes to different underlying stores or directories.

The names of agents within a namespace must be unique.

This interface is meant for use by provisioning applications that establish and maintain agent names.

<p style="text-align: center;"><<Interface>></p> <p style="text-align: center;">IpPAMAgentManagement</p>
<pre> createAgent (agentName : in TpPAMFQName, agentTypes : in TpStringList, authToken : in TpPAMCredential) : void deleteAgent (agentName : in TpPAMFQName, authToken : in TpPAMCredential) : void isAgent (agentName : in TpPAMFQName, authToken : in TpPAMCredential) : TpBoolean enableCapabilities (agentName : in TpPAMFQName, capabilities : in TpPAMCapabilityList, authToken : in TpPAMCredential) : void disableCapabilities (agentName : in TpPAMFQName, capabilities : in TpPAMCapabilityList, authToken : in TpPAMCredential) : void listEnabledCapabilities (agentName : in TpPAMFQName, authToken : in TpPAMCredential) : TpPAMCapabilityList listAllCapabilities (agentName : in TpPAMFQName, authToken : in TpPAMCredential) : TpPAMCapabilityList isCapableOf (agentName : in TpPAMFQName, capability : in TpPAMCapability, authToken : in TpPAMCredential) : TpBoolean associateTypes (agentName : in TpPAMFQName, agentTypes : in TpStringList, authToken : in TpPAMCredential) : void disassociateTypes (agentName : in TpPAMFQName, agentTypes : in TpStringList, authToken : in TpPAMCredential) : void listTypesOfAgent (agentName : in TpPAMFQName, authToken : in TpPAMCredential) : TpStringList hasType (agentName : in TpPAMFQName, typeName : in TpString, authToken : in TpPAMCredential) : TpBoolean getAgentAttributes (agentName : in TpPAMFQName, agentType : in TpString, attributeNames : in TpStringList, authToken : in TpPAMCredential) : TpPAMAttributeList setAgentAttributes (agentName : in TpPAMFQName, agentType : in TpString, attributes : in TpPAMAttributeList, authToken : in TpPAMCredential) : void </pre>

8.1.3.1 Method createAgent()

Create an agent initialized with the specified capabilities.

Parameters

agentName : in TpPAMFQName

Specifies the name of Agent to be created.

agentTypes : in TpStringList

Specifies the types of the Agent to be created. Can be an empty list.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

**TpCommonExceptions, P_PAM_AGENT_EXISTS, P_PAM_UNKNOWN_TYPE,
P_PAM_INVALID_CREDENTIAL**

8.1.3.2 Method deleteAgent()

Delete the specified Agent and all related data from the system.

Parameters

agentName : in TpPAMFQName

Specifies the name of Agent to be created.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_AGENT, P_PAM_INVALID_CREDENTIAL

8.1.3.3 Method isAgent()

Check if the specified agent exists.

Returns true if an agent with the specified name exists, false otherwise.

Parameters

agentName : in TpPAMFQName

Specifies the Agent to be checked.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpBoolean

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.1.3.4 Method enableCapabilities()

Enable the specified capabilities of the agent.

*Parameters***agentName** : in TpPAMFQName

Specifies the Agent.

capabilities : in TpPAMCapabilityList

Specifies the capabilities to be enabled.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

*Raises***TpCommonExceptions, P_PAM_UNKNOWN_AGENT, P_PAM_INVALID_CREDENTIAL****8.1.3.5 Method disableCapabilities()**

Remove the specified capabilities from the Agent.

*Parameters***agentName** : in TpPAMFQName

Specifies the Agent.

capabilities : in TpPAMCapabilityList

Specifies the communication mode to be disabled.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

*Raises***TpCommonExceptions, P_PAM_UNKNOWN_AGENT, P_PAM_NO_CAPABILITY, P_PAM_INVALID_CREDENTIAL****8.1.3.6 Method listEnabledCapabilites()**

List the enabled capabilities for the specified Agent.

Returns the list of enabled capabilities for the Agent. Returns an empty list if no enabled capabilities exist for the agent.

*Parameters***agentName** : in TpPAMFQName

Specifies the Agent whose capabilities are to be listed.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMCapabilityList

Raises

TpCommonExceptions, P_PAM_UNKNOWN_AGENT, P_PAM_INVALID_CREDENTIAL

8.1.3.7 Method listAllCapabilities()

List the capabilities for the specified Agent.

Returns the list of capabilities for the Agent. Returns an empty list if no capabilities exist for the agent.

Parameters

agentName : in TpPAMFQName

Specifies the Agent whose capabilities are to be listed.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMCapabilityList

Raises

TpCommonExceptions, P_PAM_UNKNOWN_AGENT, P_PAM_INVALID_CREDENTIAL

8.1.3.8 Method isCapableOf()

Check if an agent has a particular capability that is currently enabled.

Returns true if the agent has the specified capability, false otherwise.

Parameters

agentName : in TpPAMFQName

Specifies the Agent to be checked.

capability : in TpPAMCapability

Capability to be checked.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpBoolean

Raises

TpCommonExceptions, P_PAM_UNKNOWN_AGENT, P_PAM_INVALID_CREDENTIAL

8.1.3.9 Method associateTypes()

Associate an agent instance with the specified types.

Parameters

agentName : in TpPAMFQName

Specifies the name of Agent.

agentTypes : in TpStringList

Specifies the types of the Agent to be associated.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

**TpCommonExceptions, P_PAM_UNKNOWN_AGENT, P_PAM_UNKNOWN_TYPE,
P_PAM_TYPE_ASSOCIATED, P_PAM_INVALID_CREDENTIAL**

8.1.3.10 Method disassociateTypes()

Remove the association of a type with an agent instance. The definition of the type itself remains unaffected and the types may continue to be associated with other agents.

Parameters

agentName : in TpPAMFQName

Specifies the agent.

agentTypes : in TpStringList

Specifies the names of the types to be removed.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

**TpCommonExceptions, P_PAM_UNKNOWN_AGENT, P_PAM_DISASSOCIATED_TYPE,
P_PAM_INVALID_CREDENTIAL**

8.1.3.11 Method listTypesOfAgent()

List the types associated with the specified agent.

Returns the list containing all types associated with the specified agent. An empty list is returned if there are no types associated with the agent.

Parameters

agentName : in **TpPAMFQName**

Specifies the agent to be looked up.

authToken : in **TpPAMCredential**

Of the entity who wishes to do this operation.

Returns

TpStringList

Raises

TpCommonExceptions, **P_PAM_UNKNOWN_AGENT**, **P_PAM_INVALID_CREDENTIAL**

8.1.3.12 Method hasType()

Check if the specified agent has the named type associated with it.

Returns true if an agent with the specified name has the named type associated with it.

Parameters

agentName : in **TpPAMFQName**

Specifies the Agent to be checked.

typeName : in **TpString**

Specifies the type to be checked for.

authToken : in **TpPAMCredential**

Of the entity who wishes to do this operation.

Returns

TpBoolean

Raises

TpCommonExceptions, **P_PAM_UNKNOWN_AGENT**, **P_PAM_INVALID_CREDENTIAL**

8.1.3.13 Method getAgentAttributes()

Return the attributes associated with the agent. If the type is not specified, all associated types are assumed.

Return value contains the list of specified attributes and their values. If the attributes parameter is an empty list, all attributes in the named agent are returned.

Parameters

agentName : in **TpPAMFQName**

Specifies the agent.

agentType : in **TpString**

Specifies the type of interest. Is optional.

attributeNames : in **TpStringList**

List of attributes of interest. Can be an empty list.

authToken : in **TpPAMCredential**

Of the entity who wishes to do this operation.

Returns

TpPAMAttributeList

Raises

TpCommonExceptions, **P_PAM_UNKNOWN_AGENT**, **P_PAM_UNKNOWN_TYPE**,
P_PAM_UNKNOWN_ATTRIBUTE, **P_PAM_INVALID_CREDENTIAL**

8.1.3.14 Method setAgentAttributes()

Modify the attributes associated with the named agent. The input may contain a subset of the attributes of the named type. Only the specified attributes will be modified and the rest will remain unchanged.

Parameters

agentName : in **TpPAMFQName**

Specifies the agent.

agentType : in **TpString**

Specifies the type of interest. Is optional.

attributes : in **TpPAMAttributeList**

Contains the list of attributes and their values.

authToken : in **TpPAMCredential**

Of the entity who wishes to do this operation.

Raises

TpCommonExceptions, **P_PAM_UNKNOWN_AGENT**, **P_PAM_UNKNOWN_TYPE**,
P_PAM_UNKNOWN_ATTRIBUTES, **P_PAM_INVALID_CREDENTIAL**

8.1.4 Interface Class IpPAMAgentAssignment

Inherits from: IpInterface.

The purpose of this interface is to manage the relationship between identities and the agents assigned to them. The identities inherit capabilities from the assignments of agents.

The implementation must maintain the integrity of the relationship between identities and agents across changes to both identities and agents. Implementations may map these methods to operations on existing directories and databases. Some implementations may provide a read-only access to this interface.

This interface is meant for use by provisioning applications that establish and maintain association of agents with identities.

<<Interface>> IpPAMAgentAssignment
<pre> assignAgent (identity : in TpPAMFQName, agentName : in TpPAMFQName, authToken : in TpPAMCredential) : void unassignAgent (identity : in TpPAMFQName, agentName : in TpPAMFQName, authToken : in TpPAMCredential) : void listAssignedAgents (identity : in TpPAMFQName, authToken : in TpPAMCredential) : TpPAMFQNameList listAssociatedIdentitiesOfAgent (agentName : in TpPAMFQName, authToken : in TpPAMCredential) : TpPAMFQNameList listAssignedAgentsByCapability (identity : in TpPAMFQName, capability : in TpPAMCapability, authToken : in TpPAMCredential) : TpPAMFQNameList listCapabilitiesOfIdentity (identity : in TpPAMFQName, authToken : in TpPAMCredential) : TpPAMCapabilityList isIdentityCapableOf (identity : in TpPAMFQName, capability : in TpPAMCapability, authToken : in TpPAMCredential) : TpBoolean </pre>

8.1.4.1 Method assignAgent()

Assign an existing agent to an existing identity.

Parameters

identity : in TpPAMFQName

Specifies the identity to assign the agent to.

agentName : in TpPAMFQName

Specifies the Agent.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_UNKNOWN_AGENT, P_PAM_INVALID_CREDENTIAL

8.1.4.2 Method unassignAgent()

Unassign an agent from an existing identity. In effect, this deletes an existing relationship between an agent and an identity.

Parameters

identity : in TpPAMFQName

Specifies the identity to assign the agent to.

agentName : in TpPAMFQName

Specifies the Agent.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_UNKNOWN_AGENT, P_PAM_UNKNOWN_ASSIGNMENT, P_PAM_INVALID_CREDENTIAL

8.1.4.3 Method listAssignedAgents()

List the Agents assigned to an identity.

Returns the list of agent names assigned to the identity. An empty list is returned if no agents are assigned to the identity.

Parameters

identity : in TpPAMFQName

Specifies the identity of interest.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMFQNameList

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.1.4.4 Method listAssociatedIdentitiesOfAgent()

List the identities that have the specified agent assigned to them.

Returns the list of identities that have been assigned the specified agent. Empty list is returned if no identities have been assigned this agent.

Parameters

agentName : in **TpPAMFQName**

Specifies the Agent.

authToken : in **TpPAMCredential**

Of the entity who wishes to do this operation.

Returns

TpPAMFQNameList

Raises

TpCommonExceptions, **P_PAM_UNKNOWN_AGENT**, **P_PAM_INVALID_CREDENTIAL**

8.1.4.5 Method listAssignedAgentsByCapability()

List the Agents assigned to an identity that match the specified capability.

Returns the list of agent names with the specified capability. An empty list is returned no agents are found.

Parameters

identity : in **TpPAMFQName**

Specifies the identity of interest.

capability : in **TpPAMCapability**

Specifies the capability of interest.

authToken : in **TpPAMCredential**

Of the entity who wishes to do this operation.

Returns

TpPAMFQNameList

Raises

TpCommonExceptions, **P_PAM_UNKNOWN_IDENTITY**, **P_PAM_INVALID_CREDENTIAL**

8.1.4.6 Method listCapabilitiesOfIdentity()

List the capabilities of an identity that it derives from its assigned Agents.

Returns the list of the identity's capabilities. Returns an empty list if no capabilities exist.

*Parameters***identity : in TpPAMFQName**

Specifies the identity of interest.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

*Returns***TpPAMCapabilityList***Raises***TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL****8.1.4.7 Method isIdentityCapableOf()**

Check if an identity has the specified capability derived from one or more agents assigned to it.

Returns true if the identity has this capability, false otherwise.

*Parameters***identity : in TpPAMFQName**

Specifies the identity of interest.

capability : in TpPAMCapability

Identifies the capability to check for.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

*Returns***TpBoolean***Raises***TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL****8.1.5 Interface Class IpPAMIdentityTypeManagement**

Inherits from: IpInterface.

This clause describes the programmatic interface to define the type schema for identities specifying the attributes associated with the type. These types can then be assigned to identities. PAM implementations may provide a set of pre-defined types. Identity type names and agent type names are in the same namespace and hence must be uniquely defined across both identities and agents. The attributes for identity types and agent types are in two different namespaces and hence an attribute name may be re-used with different characteristics for identities and agents.

<p style="text-align: center;"><<Interface>></p> <p style="text-align: center;">IpPAMIdentityTypeManagement</p>
<pre> createIdentityAttribute (pAttribute : in TpPAMAttributeDef, authToken : in TpPAMCredential) : void deleteIdentityAttribute (attributeName : in TpString, authToken : in TpPAMCredential) : void getIdentityAttributeDefinition (attributeName : in TpString, authToken : in TpPAMCredential) : TpPAMAttributeDef listAllIdentityAttributes (authToken : in TpPAMCredential) : TpStringList createIdentityType (typeName : in TpString, attributeNames : in TpStringList, authToken : in TpPAMCredential) : void deleteIdentityType (typeName : in TpString, authToken : in TpPAMCredential) : void listIdentityTypes (authToken : in TpPAMCredential) : TpStringList addIdentityTypeAttributes (typeName : in TpString, attributeNames : in TpStringList, authToken : in TpPAMCredential) : void removeIdentityTypeAttributes (typeName : in TpString, attributeNames : in TpStringList, authToken : in TpPAMCredential) : void listIdentityTypeAttributes (typeName : in TpString, authToken : in TpPAMCredential) : TpStringList </pre>

8.1.5.1 Method createIdentityAttribute()

Create a definition of an identity attribute to specify its name and type.

Parameters

pAttribute : in TpPAMAttributeDef

Specifies the attribute to be created.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_ATTRIBUTE_EXISTS, P_PAM_INVALID_CREDENTIAL

8.1.5.2 Method deleteIdentityAttribute()

Delete the definition of an identity attribute.

Parameters

attributeName : in TpString

Specifies the attribute to be deleted.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL

8.1.5.3 Method getIdentityAttributeDefinition()

Get the definition for the specified identity attribute.

Returns the definition of the specified attribute.

Parameters

attributeName : in TpString

Specifies the attribute.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Returns

TpPAMAttributeDef

Raises

TpCommonExceptions, P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL

8.1.5.4 Method listAllIdentityAttributes()

List all known identity attributes.

Returns the list of attribute names defined so far. An empty array if no attributes have been defined.

Parameters

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Returns

TpStringList

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.1.5.5 Method createIdentityType()

Specify a label as the name of an identity type.

*Parameters***typeName : in TpString**

Specifies the name of the type to be created.

attributeNames : in TpStringList

Specifies the list of attributes to be added.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

*Raises***TpCommonExceptions, P_PAM_TYPE_EXISTS, P_PAM_UNKNOWN_ATTRIBUTE,
P_PAM_INVALID_CREDENTIAL****8.1.5.6 Method deleteIdentityType()**

Delete a label as the name of an identity type. All identities that have this type are no longer associated with this type and consequently will no longer will have any attributes associated with this type.

*Parameters***typeName : in TpString**

Specifies the name of the type.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

*Raises***TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_INVALID_CREDENTIAL****8.1.5.7 Method listIdentityTypes()**

List all known identity types.

Returns the list of known identity types. An empty array if no identity types have been defined.

*Parameters***authToken : in TpPAMCredential**

Credential of the entity who wishes to do this operation.

Returns

TpStringList

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.1.5.8 Method addIdentityTypeAttributes()

Add attribute definitions to the schema of an identity type that has already been defined.

Parameters

typeName : in TpString

Specifies the name of the type.

attributeNames : in TpStringList

List of attributes to be added to this type.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Raises

**TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_ATTRIBUTE_EXISTS,
P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL**

8.1.5.9 Method removeIdentityTypeAttributes()

Delete attribute definitions from the schema of an identity type that has already been defined.

Parameters

typeName : in TpString

Specifies the name of the type.

attributeNames : in TpStringList

Specifies the list of attributes to be deleted.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Raises

**TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_UNKNOWN_ATTRIBUTE,
P_PAM_INVALID_CREDENTIAL**

8.1.5.10 Method listIdentityTypeAttributes()

List all attributes of an identity type.

Returns the list of attribute definitions for the named type. An empty array if no attributes have been defined for this type.

Parameters

typeName : in TpString

Specifies the name of the type.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Returns

TpStringList

Raises

TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_INVALID_CREDENTIAL

8.1.6 Interface Class IpPAMAgentTypeManagement

Inherits from: IpInterface.

This clause describes the programmatic interface to define the type schema for agents specifying the attributes associated with the type. These types can then be assigned to agents. PAM implementations may provide a set of pre-defined types. Identity type names and agent type names are in the same namespace and hence must be uniquely defined across both identities and agents. The attributes for identity types and agent types are in two different namespaces and hence an attribute name may be re-used with different characteristics for identities and agents.

<<Interface>>

IpPAMAgentTypeManagement

```
createAgentAttribute (pAttribute : in TpPAMAttributeDef, authToken : in TpPAMCredential) : void
deleteAgentAttribute (attributeName : in TpString, authToken : in TpPAMCredential) : void
getAgentAttributeDefinition (attributeName : in TpString, authToken : in TpPAMCredential) :
    TpPAMAttributeDef
listAllAgentAttributes (authToken : in TpPAMCredential) : TpStringList
createAgentType (typeName : in TpString, attributeNames : in TpStringList, authToken : in
    TpPAMCredential) : void
deleteAgentType (typeName : in TpString, authToken : in TpPAMCredential) : void
listAgentTypes (authToken : in TpPAMCredential) : TpStringList
addAgentTypeAttributes (typeName : in TpString, attributeNames : in TpStringList, authToken : in
    TpPAMCredential) : void
removeAgentTypeAttributes (typeName : in TpString, attributeNames : in TpStringList, authToken : in
    TpPAMCredential) : void
listAgentTypeAttributes (typeName : in TpString, authToken : in TpPAMCredential) : TpStringList
```

8.1.6.1 Method createAgentAttribute()

Create a definition of an Agent attribute to specify its name and type.

Parameters

pAttribute : in TpPAMAttributeDef

Specifies the attribute to be created.

`authToken : in TpPAMCredential`

Credential of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_ATTRIBUTE_EXISTS, P_PAM_INVALID_CREDENTIAL

8.1.6.2 Method deleteAgentAttribute()

Delete the definition of an Agent attribute.

Parameters

attributeName : in **TpString**

Specifies the attribute to be deleted.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL

8.1.6.3 Method getAgentAttributeDefinition()

Get the definition for the specified Agent attribute.

Returns the definition of the specified attribute.

Parameters

attributeName : in TpString

Specifies the attribute.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Returns

TpPAMAttributeDef

Raises

TpCommonExceptions, P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL

8.1.6.4 Method listAllAgentAttributes()

List all known Agent attributes.

Returns the list of attribute names defined so far. An empty array if no attributes have been defined.

Parameters

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Returns

TpStringList

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.1.6.5 Method createAgentType()

Specify a label as the name of an Agent type.

*Parameters***typeName : in TpString**

Specifies the name of the type to be created.

attributeNames : in TpStringList

Specifies the list of attributes to be added.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

*Raises***TpCommonExceptions, P_PAM_TYPE_EXISTS, P_PAM_UNKNOWN_ATTRIBUTE,
P_PAM_INVALID_CREDENTIAL****8.1.6.6 Method deleteAgentType()**

Delete a label as the name of an Agent type. All identities that have this type are no longer associated with this type and consequently will no longer will have any attributes associated with this type.

*Parameters***typeName : in TpString**

Specifies the name of the type.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

*Raises***TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_INVALID_CREDENTIAL****8.1.6.7 Method listAgentTypes()**

List all known Agent types.

Returns the list of known Agent types. An empty array if no Agent types have been defined.

*Parameters***authToken : in TpPAMCredential**

Credential of the entity who wishes to do this operation.

Returns

TpStringList

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.1.6.8 Method addAgentTypeAttributes()

Add attribute definitions to the schema of an Agent type that has already been defined.

Parameters

typeName : in TpString

Specifies the name of the type.

attributeNames : in TpStringList

List of attributes to be added to this type.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_ATTRIBUTE_EXISTS, P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL

8.1.6.9 Method removeAgentTypeAttributes()

Delete attribute definitions from the schema of an Agent type that has already been defined.

Parameters

typeName : in TpString

Specifies the name of the type.

attributeNames : in TpStringList

Specifies the list of attributes to be deleted.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL

8.1.6.10 Method listAgentTypeAttributes()

List all attributes of an Agent type.

Returns the list of attributes for the named type. An empty array if no attributes have been defined for this type.

Parameters

typeName : in TpString

Specifies the name of the type.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Returns

TpStringList

Raises

TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_INVALID_CREDENTIAL

8.1.7 Interface Class IpPAMCapabilityManagement

Inherits from: IpInterface.

This clause describes the programmatic interface to define capability names.

Capabilities are names that define a property of an agent for which presence data may exist. Examples are voice, IM, SMS, WAP, etc. Agents can be assigned capabilities. Identities inherit capabilities from agents but cannot be directly assigned capabilities. Each capability is defined with an associated set of attributes. The attributes for each capability exist in their own namespace and hence an attribute name may be re-used with different characteristics across capabilities.

<<Interface>>

IpPAMCapabilityManagement

```
createCapabilityAttribute (pAttribute : in TpPAMAttributeDef, authToken : in TpPAMCredential) : void
deleteCapabilityAttribute (attributeName : in TpString, authToken : in TpPAMCredential) : void
getCapabilityAttributeDefinition (attributeName : in TpString, authToken : in TpPAMCredential) :
    TpPAMAttributeDef
listAllCapabilityAttributes (authToken : in TpPAMCredential) : TpStringList
createCapability (capabilityName : in TpPAMCapability, attributeNames : in TpStringList, authToken : in
    TpPAMCredential) : void
deleteCapability (capabilityName : in TpPAMCapability, authToken : in TpPAMCredential) : void
listCapabilities (authToken : in TpPAMCredential) : TpPAMCapabilityList
addCapabilityAttributes (capabilityName : in TpPAMCapability, attributeNames : in TpStringList, authToken :
    in TpPAMCredential) : void
removeCapabilityAttributes (capabilityName : in TpPAMCapability, attributeNames : in TpStringList,
    authToken : in TpPAMCredential) : void
listCapabilityAttributes (capabilityName : in TpPAMCapability, authToken : in TpPAMCredential) :
    TpStringList
assignCapabilitiesToType (agentType : in TpString, capabilities : in TpPAMCapabilityList, authToken : in
    TpPAMCredential) : void
unassignCapabilitiesFromType (agentType : in TpString, capabilities : in TpPAMCapabilityList, authToken :
    in TpPAMCredential) : void
listCapabilitiesOfType (agentType : in TpString, authToken : in TpPAMCredential) : TpPAMCapabilityList
```

8.1.7.1 Method createCapabilityAttribute()

Create a definition of a Capability attribute to specify its name and type.

Parameters

pAttribute : in TpPAMAttributeDef

Specifies the attribute to be created.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_ATTRIBUTE_EXISTS, P_PAM_INVALID_CREDENTIAL

8.1.7.2 Method deleteCapabilityAttribute()

Delete the definition of a Capability attribute.

*Parameters***attributeName : in TpString**

Specifies the attribute to be deleted.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

*Raises***TpCommonExceptions, P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL****8.1.7.3 Method getCapabilityAttributeDefinition()**

Get the definition for the specified Capability attribute.

Returns the definition of the specified attribute.

*Parameters***attributeName : in TpString**

Specifies the attribute.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

*Returns***TpPAMAttributeDef***Raises***TpCommonExceptions, P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL****8.1.7.4 Method listAllCapabilityAttributes()**

List all known Capability attributes.

Returns the list of attribute names defined so far. An empty array if no attributes have been defined.

*Parameters***authToken : in TpPAMCredential**

Credential of the entity who wishes to do this operation.

Returns

TpStringList

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.1.7.5 Method createCapability()

Specify a label as the name of a Capability type.

Parameters

capabilityName : in TpPAMCapability

Specifies the name of the type to be created.

attributeNames : in TpStringList

Specifies the list of attributes to be added.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Raises

**TpCommonExceptions, P_PAM_TYPE_EXISTS, P_PAM_UNKNOWN_ATTRIBUTE,
P_PAM_INVALID_CREDENTIAL**

8.1.7.6 Method deleteCapability()

Delete a label as the name of a Capability. All agents that have this type are no longer associated with this type and consequently will no longer will have any attributes associated with this type.

Parameters

capabilityName : in TpPAMCapability

Specifies the name of the type.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_INVALID_CREDENTIAL

8.1.7.7 Method listCapabilities()

List all known Capability types.

Returns the list of known Capability types. An empty array if no Capability types have been defined.

Parameters

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Returns

TpPAMCapabilityList

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.1.7.8 Method addCapabilityAttributes()

Add attribute definitions to the schema of a capability that has already been defined.

Parameters

capabilityName : in TpPAMCapability

Specifies the name of the type.

attributeNames : in TpStringList

List of attributes to be added to this type.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_ATTRIBUTE_EXISTS, P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL

8.1.7.9 Method removeCapabilityAttributes()

Delete attribute definitions from the schema of a Capability that has already been defined.

Parameters

capabilityName : in TpPAMCapability

Specifies the name of the type.

attributeNames : in TpStringList

Specifies the list of attributes to be deleted.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL

8.1.7.10 Method listCapabilityAttributes()

List all attributes of a capability.

Returns the list of attributes for the named Capability. An empty array if no attributes have been defined for this capability.

Parameters

capabilityName : in TpPAMCapability

Specifies the name of the type.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Returns

TpStringList

Raises

TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_INVALID_CREDENTIAL

8.1.7.11 Method assignCapabilitiesToType()

Assign capabilities to agent type.

Parameters

agentType : in TpString

Name of an agent type.

capabilities : in TpPAMCapabilityList

Specifies the list of capabilities to be associated.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_UNKNOWN_CAPABILITY, P_PAM_INVALID_CREDENTIAL

8.1.7.12 Method unassignCapabilitiesFromType()

Unassign capabilities from an agent type.

Parameters

agentType : in TpString

Name of an agent type.

capabilities : in TpPAMCapabilityList

Specifies the list of capabilities to be disassociated.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_UNKNOWN_CAPABILITY, P_PAM_INVALID_CREDENTIAL

8.1.7.13 Method listCapabilitiesOfType()

List capabilities assigned to an agent type.

Returns the list of capabilities assigned to the agent type.

Parameters

agentType : in TpString

Name of an agent type.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMCapabilityList

Raises

TpCommonExceptions, P_PAM_UNKNOWN_TYPE, P_PAM_INVALID_CREDENTIAL

8.2 PAM Access SCF Interface Classes

This service consists of the presence and availability query and update interfaces.

8.2.1 Interface Class IpPAMPresenceAvailabilityManager

Inherits from: IpService.

The purpose of this interface is to supply the various interfaces available in this service to the application and to provide the authentication credentials. This interface is the only discoverable interface from the framework.

All PAM methods optionally use an authentication token as a parameter since the outcome of the operations may

depend on the entity requesting the operation. To enable this, the `getAuthToken()` method is used to obtain an implementation dependent token. An application that has authenticated itself with the OSA framework, can get an authentication token for itself. Alternatively, if the application is requesting PAM operations on behalf of multiple entities, authentication tokens may be requested for each such entity after providing any available data about the asker. These tokens can then be used repeatedly for operations within a session without further need to identify the asker.

<code><<Interface>></code>
IpPAMPresenceAvailabilityManager
<pre>getAuthToken (askerData : in TpAttributeList) : TpPAMCredential obtainInterface (interfaceName : in TpPAMPresenceAvailabilityInterfaceName) : IPIInterfaceRef getAccessControl (identity : in TpPAMFQName, authToken : in TpPAMCredential) : TpPAMAccessControlData setAccessControl (identity : in TpPAMFQName, operation : in TpPAMPreferenceOp, newAccessControl : in TpPAMAccessControlData, authToken : in TpPAMCredential) : void activateService (identity : in TpPAMFQName, authToken : in TpPAMCredential) : void deactivateService (identity : in TpPAMFQName, authToken : in TpPAMCredential) : void isActivelIdentity (identity : in TpPAMFQName, authToken : in TpPAMCredential) : TpBoolean</pre>

8.2.1.1 Method `getAuthToken()`

Get an authentication token for access to the interface methods.

Returns an implementation-dependent authentication credential that can be verified.

Parameters

askerData : in TpAttributeList

Specifies information about the asker. Can be an empty array. The exact attributes in this list are dependent on the application. PAM reserves the attribute "name" with type TpPAMFQName to contain the identity of the asker if known.

Returns

TpPAMCredential

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.2.1.2 Method `obtainInterface()`

Obtain available interfaces from the service. The valid parameters for this method can be obtained from the service property `P_OBTAINABLE_INTERFACES`.

Returns the requested interface.

*Parameters***interfaceName : in TpPAMPresenceAvailabilityInterfaceName**

Specifies the name of the required interface.

*Returns***IpInterfaceRef***Raises***TpCommonExceptions, P_PAM_UNAVAILABLE_INTERFACE**

8.2.1.3 Method getAccessControl()

Get the access control associated with the data belonging to an identity. The data associated with an identity includes the static and dynamic attributes of an identity as well as data about agents associated with an identity.

This method should be used in conjunction with the setAccessControl method.

Returns the access control if previously specified for the identity. Is null if there is no access control associated.

*Parameters***identity : in TpPAMFQName**

Specifies the identity of interest.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

*Returns***TpPAMAccessControlData***Raises***TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL**

8.2.1.4 Method setAccessControl()

Set the access controls for the data associated with the specified identity. If the identity is Null, the access control is set for all identities (if authorized to do so). The data associated with an identity includes the static and dynamic attributes of an identity as well as data about agents associated with an identity.

Any existing access control will be modified based on the operation.

If the new access control is specified as Null for replace operation , an existing access control will be removed.

*Parameters***identity : in TpPAMFQName**

Specifies the identity of interest.

operation : in TpPAMPreferenceOp

Specifies the operation to be performed with the specified preference.

newAccessControl : in TpPAMAccessControlData

Specifies the access controls to add.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.2.1.5 Method activateService()

Activate the service for the specified identity. If the identity is null, activate the service for ALL identities. The method succeeds if the service is already activated for the specified identity.

Parameters

identity : in TpPAMFQName

Specifies the identity of interest. Can be NULL (empty string).

authToken : in TpPAMCredential

of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.2.1.6 Method deactivateService()

Deactivate the service for the specified identity. If the identity is null, deactivate the service for ALL identities. The method succeeds if the service is already deactivated for the specified identity.

Parameters

identity : in TpPAMFQName

Specifies the identity of interest. Can be NULL (empty string).

authToken : in TpPAMCredential

of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.2.1.7 Method isActivIdentity()

Check if the service is active for the specified identity.

Returns true if the service is active for that identity, false otherwise.

*Parameters***identity : in TpPAMFQName**

Specifies the identity of interest. Cannot be NULL (empty string).

authToken : in TpPAMCredential

of the entity who wishes to do this operation.

*Returns***TpBoolean***Raises***TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL**

8.2.2 Interface Class IpPAMIdentityPresence

Inherits from: IpInterface.

The purpose of this interface is to maintain the dynamic presence information of identity.

The underlying implementations may optimize the storage for this dynamic data rather than rely on a general-purpose directory or database when performance is an issue. Presence information for identities may be explicitly registered or may be implicitly derived from the underlying networks or presence information from agents associated with the identity.

This interface is meant for use by applications that register and/or maintain dynamic presence information associated with identities and accessible without the privacy or other controls established by availability preferences. These applications may not be aware of the name and the types of agents associated with the identity.

The presence information can be explicitly registered using the interface or the presence may come from information implicitly derived (e.g., using presence information of agents associated with the identity).

<pre><<Interface>> IpPAMIdentityPresence</pre>
<pre>setIdentityPresence (identity : in TpPAMFQName, identityType : in TpString, attributes : in TpPAMAttributeList, authToken : in TpPAMCredential) : void setIdentityPresenceExpiration (identity : in TpPAMFQName, identityType : in TpString, attributeNames : in TpStringList, expiresIn : in TpPAMTimeInterval, authToken : in TpPAMCredential) : void getIdentityPresence (identity : in TpPAMFQName, identityType : in TpString, attributeNames : in TpStringList, authToken : in TpPAMCredential) : TpPAMAttributeList</pre>

8.2.2.1 Method setIdentityPresence()

Set identity's dynamic attributes.

*Parameters***identity : in TpPAMFQName**

Specifies the identity.

identityType : in TpString

Specifies the type of the identity.

attributes : in TpPAMAttributeList

Specifies the attributes to set.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

*Raises***TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_UNKNOWN_TYPE,
P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL****8.2.2.2 Method setIdentityPresenceExpiration()**

Set or reset the expiration of an identity's named presence attributes. If the attributeNames parameter is an empty list, the expiration time of all attributes defined for the identity will have their expiration time changed.

*Parameters***identity : in TpPAMFQName**

Specifies the identity.

identityType : in TpString

Specifies the type of the identity.

attributeNames : in TpStringList

Specifies the names of the attributes. Can be an empty list.

expiresIn : in TpPAMTimeInterval

Specifies the number of seconds until the attributes expire. A value of -1 indicates no expiration.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

*Raises***TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_UNKNOWN_TYPE,
P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL****8.2.2.3 Method getIdentityPresence()**

Retrieve presence attributes associated with an identity.

Return value contains the requested attributes of the named capability. If the attributes parameter is an empty array, all attributes of the named profile are included.

Parameters

identity : in TpPAMFQName

Specifies the identity.

identityType : in TpString

Specifies the type of the identity.

attributeNames : in TpStringList

Specifies the attributes of interest. Can be an empty list.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMAttributeList

Raises

**TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_UNKNOWN_TYPE,
P_PAM_UNKNOWN_ATTRIBUTE, P_PAM_INVALID_CREDENTIAL**

8.2.3 Interface Class IpPAMAvailability

Inherits from: IpInterface.

The purpose of the interface is to:

- Manage the preferences specified for the availability of an identity and, to
- Query for the availability of identities for specific capabilities.
- Query for attributes of interest from an identity.

Simple implementations may equate the availability of identities to presence of their agents with available status. More complex implementations may consider, in addition, the preferences specified for availability as well as the attributes of the entity asking for availability.

The queries for availability are done for a specified context. A context is a set of attributes describing the situation for which availability is requested. PAM specifies one pre-defined context - Communication. The Communication context is used for availability for a specific mode of communication. Applications and PAM implementations may extend and provide additional contexts such as availability at a particular location, availability for a specific mode of communication at a given location, etc. The context information also includes any information about the asker as may be provided by the asker.

The specification defines two types of preference mechanisms although implementations may support additional mechanisms. The first mechanism consists of access control lists that specify identities that are allowed/denied to access information about the identity whose preference is being set. The second mechanism allow for an external application interface to be specified to check for access control as well as to compute availability.

<<Interface>> IpPAMAvailability
<pre> getAvailability (identity : in TpPAMFQName, pamContext : in TpPAMContext, attributeNames : in TpStringList, authToken : in TpPAMCredential) : TpPAMAvailabilityProfileList getPreference (identity : in TpPAMFQName, pamContext : in TpPAMContext, authToken : in TpPAMCredential) : TpPAMPreferenceData setPreference (identity : in TpPAMFQName, pamContext : in TpPAMContext, operation : in TpPAMPreferenceOp, newPreference : in TpPAMPreferenceData, authToken : in TpPAMCredential) : void </pre>

8.2.3.1 Method getAvailability()

Get the availability for an identity for a given context.

All contexts may optionally include an asker profile. Although PAM applications may decide what attributes to include in an asker profile, PAM implementations should not require such attributes to be present. The implementations should leave it to the availability computations to decide the availability based on the (partial) information provided.

It is also up to the availability computation to decide on the trustworthiness of the asker profile information based on the application, the credentials of the entity asking for availability and/or the credentials, if any, of the entity accessing the interface.

Returns a value containing a list of attributes as available to the asker in the requested context. If no information is available to the asker an empty list is returned.

Parameters

identity : in TpPAMFQName

Specifies the identity for which the availability is being requested.

pamContext : in TpPAMContext

Specifies the context for which the availability is requested.

attributeNames : in TpStringList

Specifies the attributes of interest. Can be an empty list to indicate all attributes.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMAvailabilityProfileList

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.2.3.2 Method getPreference()

Get the availability preferences of an identity for the specified communication mode.

This method should be used in conjunction with the setPreference method.

Returns the preference for the named context if previously specified for the identity. Is null if there are no preferences associated.

Parameters

identity : in TpPAMFQName

Specifies the identity of interest.

pamContext : in TpPAMContext

Specifies the context for which the preferences are requested.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMPreferenceData

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.2.3.3 Method setPreference()

Set the availability preferences for the specified identity for the specified context. If the identity is Null, the preference is set for all identities (if authorized to do so).

The existing preference will be modified based on the operation.

If the new preference is specified as Null for replace operation , any existing preferences for the specified context will be removed.

Parameters

identity : in TpPAMFQName

Specifies the identity with which the preference will be associated.

pamContext : in TpPAMContext

Specifies the capability to which this preference applies.

operation : in TpPAMPreferenceOp

Specifies the operation to be performed with the specified preference.

newPreference : in TpPAMPreferenceData

Specifies the availability preference to add.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.2.4 Interface Class IpAppPAMPreferenceCheck

Inherits from: **IpInterface**.

The purpose of this interface is to provide methods to be called by the PAM service to check for access control or to compute availability using an implementation provided by an application. Instances of this interface are registered using the setPreference() method in the availability management interface.

<p style="text-align: center;"><<Interface>></p> <p style="text-align: center;">IpAppPAMPreferenceCheck</p> <hr/> <hr/> <p>computeAvailability (identity : in TpPAMFQName, pamContext : in TpPAMContext, attributeNames : in TpStringList, authToken : in TpPAMCredential) : TpPAMAvailabilityProfileList</p>
--

8.2.4.1 Method computeAvailability()

Compute the availability for an identity for a given context. The data provided is the same as the data provided for the getAvailability call. The application implementing this interface uses the identity presence interface to get the current presence data and maintains its own user preferences to compute the availability.

Returns a value containing a list of attributes as available to the asker in the requested context. If no information is available to the asker an empty list is returned.

Parameters

identity : in TpPAMFQName

Specifies the identity for which the availability is being requested.

pamContext : in TpPAMContext

Specifies the context for which the availability is requested.

attributeNames : in TpStringList

Specifies the attributes of interest. Can be an empty list to indicate all attributes.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMAvailabilityProfileList

8.3 PAM Event SCF Interface Classes

This service contains an interface for registering for notifications for events that occur within the PAM service.

8.3.1 Interface Class IpPAMEventManager

Inherits from: IpService.

The purpose of this interface is to supply the various interfaces available in this service to the application and to provide the authentication credentials. This interface is the only discoverable interface from the framework.

All PAM methods use an authentication token as a parameter since the outcome of the operations may depend on the entity requesting the operation. To enable this, the getAuthToken() method is used to obtain an implementation dependent token. An application that has authenticated itself with the OSA framework, can get an authentication token for itself. Alternatively, if the application is requesting PAM operations on behalf of multiple entities, authentication tokens may be requested for each such entity after providing any available data about the asker. These tokens can then be used repeatedly for operations within a session without further need to identify the asker.

<<Interface>> IpPAMEventManager
<pre> getAuthToken (askerData : in TpAttributeList) : TpPAMCredential obtainInterface (interfaceName : in TpPAMEventInterfaceName) : IplInterfaceRef getAccessControl (identity : in TpPAMFQName, authToken : in TpPAMCredential) : TpPAMAccessControlData setAccessControl (identity : in TpPAMFQName, operation : in TpPAMPreferenceOp, newAccessControl : in TpPAMAccessControlData, authToken : in TpPAMCredential) : void activateService (identity : in TpPAMFQName, authToken : in TpPAMCredential) : void deactivateService (identity : in TpPAMFQName, authToken : in TpPAMCredential) : void isActivelidentity (identity : in TpPAMFQName, authToken : in TpPAMCredential) : TpBoolean </pre>

8.3.1.1 Method getAuthToken()

Get an authentication token for access to the interface methods.

Returns an implementation-dependent authentication credential that can be verified.

Parameters

askerData : in TpAttributeList

Specifies information about the asker. Can be an empty array. The exact attributes in this list are dependent on the application. PAM reserves the attribute "name" with type TpPAMFQName to contain the identity of the asker if known.

Returns

TpPAMCredential

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.3.1.2 Method obtainInterface()

Obtain available interfaces from the service. The valid parameters for this method can be obtained from the service property P_OBTAINABLE_INTERFACES.

Returns the requested interface.

Parameters

interfaceName : in TpPAMEventInterfaceName

Specifies the name of the required interface.

Returns

IpInterfaceRef

Raises

TpCommonExceptions, P_PAM_UNAVAILABLE_INTERFACE

8.3.1.3 Method getAccessControl()

Get the access control associated with the data belonging to an identity. The data associated with an identity includes the static and dynamic attributes of an identity as well as data about agents associated with an identity.

This method should be used in conjunction with the setAccessControl method.

Returns the access control if previously specified for the identity. Is null if there is no access control associated.

Parameters

identity : in TpPAMFQName

Specifies the identity of interest.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Returns

TpPAMAccessControlData

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.3.1.4 Method setAccessControl()

Set the access controls for the data associated with the specified identity. If the identity is Null, the access control is set for all identities (if authorized to do so). The data associated with an identity includes the static and dynamic attributes of an identity as well as data about agents associated with an identity.

Any existing access control will be modified based on the operation.

If the new access control is specified as Null for replace operation , an existing access control will be removed.

Parameters

identity : in TpPAMFQName

Specifies the identity of interest.

operation : in TpPAMPreferenceOp

Specifies the operation to be performed with the specified preference.

newAccessControl : in TpPAMAccessControlData

Specifies the access controls to add.

authToken : in TpPAMCredential

Of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.3.1.5 Method activateService()

Activate the service for the specified identity. If the identity is null, activate the service for ALL identities. The method succeeds if the service is already activated for the specified identity.

Parameters

identity : in TpPAMFQName

Specifies the identity of interest. Can be NULL (empty string).

authToken : in TpPAMCredential

of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.3.1.6 Method deactivateService()

Deactivate the service for the specified identity. If the identity is null, deactivate the service for ALL identities. The method succeeds if the service is already deactivated for the specified identity.

Parameters

identity : in TpPAMFQName

Specifies the identity of interest. Can be NULL (empty string).

authToken : in TpPAMCredential

of the entity who wishes to do this operation.

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.3.1.7 Method isActiveIdentity()

Check if the service is active for the specified identity. Returns true if the service is active for that identity, false otherwise.

Parameters

identity : in TpPAMFQName

Specifies the identity of interest. Cannot be NULL (empty string).

authToken : in TpPAMCredential

of the entity who wishes to do this operation.

Returns

TpBoolean

Raises

TpCommonExceptions, P_PAM_UNKNOWN_IDENTITY, P_PAM_INVALID_CREDENTIAL

8.3.2 Interface Class IpAppPAMEventHandler

Inherits from: IpInterface.

This is the interface that a client application must implement and register with the Event Service in order to be notified of events.

<p style="text-align: center;"><<Interface>></p> <p style="text-align: center;">IpAppPAMEventHandler</p>
<p>eventNotify (eventID : in TpPAMEventID, eventInfo : in TpPAMNotificationInfoList) : void</p> <p>eventNotifyErr (eventID : in TpPAMEventID, errorInfo : in TpPAMErrorInfo) : void</p>

8.3.2.1 Method eventNotify()

Notify the occurrence of an event. The implementations will not attempt to re-notify on failure.

Parameters

eventID : in TpPAMEventID

Specifies a prior event registration ID.

eventInfo : in TpPAMNotificationInfoList

Contains the data about the events that occurred.

8.3.2.2 Method eventNotifyErr()

Notify an error in the event reporting. The error may concern all assignments, one whole assignment or a part of it. An eventNotify is sent after the error condition has passed away unless the event has been subsequently deregistered. Re-registration may only be needed in fatal system error cases. Note that in normal operation unavailable or protected pieces of presence information are delivered by the normal reporting methods instead of an error method.

Parameters

eventID : in TpPAMEventID

Specifies a prior event registration ID.

errorInfo : in TpPAMErrorInfo

Contains the data relating to the error.

8.3.3 Interface Class IpPAMEventHandler

Inherits from: IpInterface.

The purpose of this interface is to manage the registrations of interest in events and the registration of client interfaces for subsequent notification. All notifications in the present document are to be sent after the corresponding event has occurred and are asynchronous. An application must first register a notification interface with the service. It can then register interest in one or more events for this interface.

A failure or a reset of a PAM implementation may result in a loss of all prior event and interface registrations. The client application may need to confirm the continued registration of the notification interface and re-register if necessary.

For security and privacy purposes, a registration for an event is allowed if and only if the supplied credentials during registration is sufficient to have allowed access to the information related to the event through one or more of the PAM interface methods.

<p style="text-align: center;"><<Interface>></p> <p style="text-align: center;">IpPAMEventHandler</p>
<pre>isRegistered (clientID : in TpPAMClientID, authToken : in TpPAMCredential) : TpBoolean registerAppInterface (appInterface : in IpAppPAMEventHandlerRef, authToken : in TpPAMCredential) : TpPAMClientID registerForEvent (clientID : in TpPAMClientID, eventList : in TpPAMEventInfoList, validFor : in TpDuration, authToken : in TpPAMCredential) : TpPAMEventID deregisterAppInterface (clientID : in TpPAMClientID, authToken : in TpPAMCredential) : void deregisterFromEvent (eventID : in TpPAMEventID, authToken : in TpPAMCredential) : void</pre>

8.3.3.1 Method isRegistered()

Check if a client application interface is registered.

Returns True if the registration ID is still valid, False otherwise.

Parameters

clientID : in TpPAMClientID

Specifies the registration ID provided at registration.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Returns

TpBoolean

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.3.3.2 Method registerAppInterface()

Register a client application's notification interface.

Returns an ID returned by the service that uniquely identifies this registration.

Parameters

appInterface : in IpAppPAMEventHandlerRef

Specifies the client notification interface.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Returns

TpPAMClientID

Raises

TpCommonExceptions, P_PAM_INVALID_CREDENTIAL

8.3.3.3 Method registerForEvent()

Register a client application's interest in one or more events.

Returns an ID returned by the service that uniquely identifies this registration for the event.

Parameters

clientID : in TpPAMClientID

Specifies the registration ID provided at registration.

eventList : in TpPAMEventInfoList

Specifies the events of interest.

validFor : in TpDuration

Specifies the interval in milliseconds until which the subscription is held and notifications provided. A time interval of 0 or negative values indicate a subscription that never expires until explicitly cancelled.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

Returns

TpPAMEventID

Raises

TpCommonExceptions, P_PAM_NOT_REGISTERED, P_PAM_INVALID_CREDENTIAL

8.3.3.4 Method deregisterApplInterface()

Unregister a client application's notification interface.

All registrations for events for this client registration are also removed.

Parameters

clientID : in TpPAMClientID

Specifies the registration ID provided at registration.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

*Raises***TpCommonExceptions, P_PAM_NOT_REGISTERED, P_PAM_INVALID_CREDENTIAL****8.3.3.5 Method deregisterFromEvent()**

Unregister a client application's interest in an event.

*Parameters***eventID : in TpPAMEventID**

Specifies a prior event registration ID.

authToken : in TpPAMCredential

Credential of the entity who wishes to do this operation.

*Raises***TpCommonExceptions, P_PAM_NOT_REGISTERED, P_PAM_INVALID_CREDENTIAL****9 State Transition Diagrams**

There are no State Transition Diagrams for the Presence and Availability Management SCFs.

10 PAM Service Properties

The following table lists properties relevant to all the PAM SCFs.

Property	Type	Description
P_OBTAINABLE_INTERFACES	STRING_SET	The interfaces obtainable from the service.
P_SUPPORTED_ATTRIBUTE_TAGS	STRING_SET	Lists the supported attribute tags defined by TpAttributeTagInfo.
P_SUPPORTED_SIMPLE_ATTRIBUTE_TYPES	STRING_SET	Lists the supported attribute types defined by TpSimpleAttributeTypeInfo.
P_SUPPORTED_STRUCTURED_ATTRIBUTE_TYPES	STRING_SET	Lists the supported attribute types defined by TpStructuredAttributeType, e.g. P_org/csapi/TpAddress.
P_SUPPORTED_XML	STRING_SET	Lists the supported versions of XML specifications such as XML schema specifications (e.g. through URLs), XML versions (e.g. version 1.0) or XPath (e.g. version 1.0).

Implementations of the PAM APIs shall have the Service Properties set to the indicated values at a minimum:

```
P_SUPPORTED_ATTRIBUTE_TAGS = {
P_SIMPLE_TYPE
}
P_SUPPORTED_SIMPLE_ATTRIBUTE_TYPES = {
P_STRING,
P_FLOAT,
P_INT32
}
```

10.1 PAM Access Service

Implementations of the PAM Access APIs for 3GPP shall have the Service Properties set to the indicated values:

```
P_OBTAINABLE_INTERFACES = {
P_PAM_IDENTITY_PRESENCE,
P_PAM_AVAILABILITY
}
```

10.2 PAM Event Service

PAM Event service has the following property in addition to the above.

Property	Type	Description
P_EVENT_TYPES	INTEGER_SET	The pre-defined event types that can be registered for

11 PAM Data Definitions

All data types referenced in this document but not defined in this clause are common data definitions which may be found in 3GPP TS 29.198-2.

11.1 Entity Address Definitions

11.1.1 TpPAMFQName

This is the same as TpURN and is used to name entities in PAM Access service.

11.1.2 TpPAMFQNameList

This is a [Numbered List of Data Elements](#) of type TpPAMFQName.

11.2 Attribute Data Definitions

11.2.1 TpPAMAttribute

This is a [Sequence of Data Elements](#) containing the attribute name, expiration time and value. This is derived from the common attribute type TpAttribute to add the expiration value for dynamic attributes.

Sequence Element Name	Sequence Element Type	Notes
AttributeName	TpString	The name of the attribute.
AttributeValue	TpAttributeValue	The typed value(s) for the attribute.
ExpiresIn	TpPAMTimeInterval	The interval in milliseconds in which the attribute values are valid. A time interval of PAM_MAX_LONGINT indicates static attribute values that never expire. A time interval of 0 or negative values indicate an expired value and the time for which it has expired.

11.2.2 TpPAMAttributeList

This is a [Numbered List of Data Elements](#) of type TpPAMAttribute.

11.2.3 TpPAMAttributeDef

This is a [Sequence of Data Elements](#) containing the definition of an attribute. This definition constitutes the “schema” for an attribute and contains fields to define the type and behavior of a dynamic attribute. Each definition using these fields results in a TpPAMAttribute with the corresponding name and type and dynamic behavior as defined by the remaining fields.

Sequence Element Name	Sequence Element Type	Notes
Name	TpString	Name of attribute
Type	TpString	Type of attribute. Valid values for Type must include at least TpString, TpInt32 and TpFloat
IsStatic	TpBoolean	True indicates that the attribute is always static and its values never expire. False indicates that the attribute can be dynamic and may contain values that expire.
IsRevertOnExpiration	TpBoolean	True indicates that the attribute reverts to the default value on expiration. False indicates that the attribute will not revert to the default value.
DefaultValues	TpAny	An attribute is always initialized with this value. If the <i>isRevertOnExpiration</i> attribute is set to true, a dynamic attribute that has expired while stored in a PAM implementation is reset to this value with the <i>expiresIn</i> interval set to PAM_MAX_LONGINT. The default attribute value is interpreted based on the value of the attribute Type.

11.2.4 TpPAMAttributeDefList

This is a [Numbered List of Data Elements](#) of type TpPAMAttributeDef.

11.3 Presence Data Definitions

11.3.1 TpPAMCapability

This defines the extensible communication capabilities. This data type is identical to a TpString, and is defined as a string of characters that specify the communication capabilities. The following strings are pre-defined.

Character String Value	Description
P_PAM_VOICE	Capability for voice calls
P_PAM_SMS	Capability for SMS
P_PAM_IM	Capability for Instant Messaging
P_PAM_MMS	Capability for Multi-media messaging

11.3.2 TpPAMCapabilityList

This is a [Numbered List of Data Elements](#) of type TpPAMCapability.

11.3.3 TpPAMPresenceData

This is a [Sequence of Data Elements](#) for a specific identity type Presentity pre-defined in PAM. Since multiple presence data records can be associated with an identity, each distinct record is uniquely named.

Sequence Element Name	Sequence Element Type	Notes
Name	TpString	Name of presence data
PresenceAttributes	TpPAMAttributeList	Presence Attributes

11.3.4 TpPAMPresenceDataList

This is a [Numbered List of Data Elements](#) of type TpPAMPresenceData.

11.4 Pre-defined Presence type

11.4.1 Presentity

An identity type Presentity is pre-defined for all identities associated with the attribute PresenceProfile defined as:

Attribute Definition Field	Value
Name	PresenceProfile
Type	TpPAMPresenceData
IsStatic	False
IsRevertOnExpiration	False
DefaultValues	Null

11.5 Availability Data Definitions

11.5.1 TpPAMAvailabilityProfile

This is a [Sequence of Data Elements](#) containing the list of attribute values as determined by the definition of the context for which the availability is provided.

Sequence Element Name	Sequence Element Type	Notes
PrivacyCode	TpPAMPrivacyCode	Contains the privacy codes
AvailabilityData	TpPAMPresenceData	Contains a list of presence attributes

11.5.2 TpPAMAvailabilityProfileList

This is a [Numbered List of Data Elements](#) of type TpPAMAvailabilityProfile.

11.5.3 TpPAMPrivacyCode

This data type is identical to a TpString, and is defined as a string of characters that specify the privacy code for availability profiles. These codes are just indications of the privacy expected by the service and not are meant to be enforced by the service. Other Network operator specific codes may also be used, but should be preceded by the string "S_". The following values are defined.

Character String Value	Description
PAM_CPASKERONLY	The profile is available to the asker only and should not be further transmitted
PAM_CPAUTHORIZED	The profile can be provided by the asker to authorized entities
PAM_CPUTILIMITED	The profile can be distributed without limits

11.6 Availability Context Data Definitions

Availability is always queried for in a specific context on behalf of an asker. There is one context for communication pre-defined in this version of the specification.

11.6.1 TpPAMContext

This is a [Sequence of Data Elements](#) containing the data which defines the context in which an availability is queried and information about the asker that is requesting the data.

Sequence Element Name	Sequence Element Type	Notes
ContextData	TpPAMContextData	Contains the context name and the list of attributes that define the context. The attributes to be included for a given context are specified by the definition of the context.
AskerData	TpAttributeList	Contains information about the asker of availability. The exact attributes in this list are dependent on the application. PAM reserves the attribute "name" with type TpPAMFQName to contain the identity of the asker if known.

11.6.2 TpPAMContextName

This specifies the availability contexts.

Name	Value	Description
PAM_CONTEXT_ANY	0	Denotes any known context
PAM_CONTEXT_COMMUNICATION	1	Denotes a communication context

11.6.3 TpPAMContextData

This is a [tagged choice of data elements](#) that specifies the optional data that may be required to define a particular context.

	Tag Element Type	
	TpPAMContextName	

Tag Element Value	Choice Element Type	Choice Element Name
PAM_CONTEXT_ANY	None	Undefined
PAM_CONTEXT_COMMUNICATION	TpPAMCommunicationContext	CommunicationContext

11.6.4 TpPAMCommunicationContext

This is a [Sequence of Data Elements](#) containing the list of attribute values for defining a communication context.

Sequence Element Name	Sequence Element Type	Notes
CommunicationCapability	TpPAMCapability	Specifies the communication type for which the availability is requested

11.6.5 TpPAMContextList

This is a [Numbered List of Data Elements](#) of type TpPAMContext.

11.7 Credential data definitions

11.7.1 TpPAMCredential

This is the same as TpOctetSet. This data is opaque to the application and is implementation dependent. As this data is valid only in the context of a single session with the service and hence cannot be used across multiple services, there are no inter-operability issues here. The application simply uses the credential returned from the getAuthToken() method in all other methods that require the credentials.

11.8 Availability and Access Control Preference Data Definitions

PAM allows several types of preferences to be specified. It includes an access control list specifying who is allowed to check for presence or subscribe to presence data for each identity. It also includes an interface for an application to register an interface to do access control checks and availability computations outside of the presence service.

11.8.1 IpAppPAMPreferenceCheckRef

Defines a Reference to type IpAppPAMPreferenceCheck.

11.8.2 TpPAMAccessControlData

This is a [Sequence of Data Elements](#) for access control data.

Sequence Element Name	Sequence Element Type	Notes
DefaultPolicy	TpPAMACLDefault	Specifies whether the default policy is to allow or deny access for names not mentioned in the list
AllowList	TpPAMFQNameList	Specifies a list of identities to be allowed access
DenyList	TpPAMFQNameList	Specifies a list of identities to be denied access

11.8.3 TpPAMACLDefault

Defines the two possible default policies for access control.

Name	Value	Description
PAM_ACCESS_ALLOW	0	Allow access by default
PAM_ACCESS_DENY	1	Deny access by default

11.8.4 TpPAMPreferenceOp

This data type is identical to a TpString, and is defined as a string of characters that specify the operations to be performed with a preference. The following values are defined.

Character String Value	Description
PAM_ACCESS_ADD	Add the specified preference to the current preferences
PAM_ACCESS_DELETE	Delete the specified preference from the current preferences
PAM_ACCESS_REPLACE	Replace the current preferences with the specified preference

11.8.5 TpPAMPreferenceType

This specifies the names of privacy and access control mechanisms supported by the service.

Name	Value	Description
PAM_ACCESS_LIST	0	The control data contains additions or modifications to access control list of who is authorized to access the presence information or subscribe to it.
PAM_EXTERNAL_CONTROL	1	The access control and availability computations are done external to the presence service

11.8.6 TpPAMPreferenceData

This is a [tagged choice of data elements](#) that specifies the preference data. The data depends on the type of preference being specified.

	Tag Element Type	
	TpPAMPreferenceType	

Tag Element Value	Choice Element Type	Choice Element Name
PAM_EXTERNAL_CONTROL	IpAppPAMPreferenceCheckRef	ExternalControlInterface

11.9 Time data definitions

11.9.1 TpPAMTimeInterval

This is identical to TpInt64.

11.10 Pre-defined Entity Types and Attributes

This version of the specification pre-defines one identity type called “Presentity”. The following constant can be used to refer to this Identity Type. All identities in the PAM service are associated with this identity type. For example, the identityType parameter in IpIdentityPresence and IpEventHandler methods take this as the value. This is also used in the event registration data structure (e.g., TpPAMAVCEventData) in the IdentityType field.

Character String Value	Description
P_PAM_PRESENTITY_TYPE	The pre-defined identity type called Presentity.

Every identity type in PAM can be defined with a set of attributes that are associated with all identities of that type. The following dynamic attributes are pre-defined as attributes of type TpPAMAttribute for the “Presentity” identity type and shall be supported as attributes of all identities in implementations of this service. These attributes are defined using TpPAMAttributeDef fields as follows.

AttributeName	AttributeType	IsStatic	IsRevertOnExpiry	DefaultValue	Description
P_SUBSCRIBER_STATUS	P_STRING	False	False	None	Specifies the status of the subscriber
P_NETWORK_STATUS	P_STRING	False	False	None	Specifies the status of the network
P_COMMUNICATION_MEANS	P_org/csapi/pam/TpPAMCapability	False	False	None	Specifies the means of communication. The type is TpPAMCapability
P_CONTACT_ADDRESS	P_org/csapi/Tp Address	False	False	None	Address for communication
P_SUBSCRIBER_PROVIDED_LOCATION	P_STRING	False	False	None	Location information provided by subscriber. Is optional.
P_NETWORK_PROVIDED_LOCATION	P_STRING	False	False	None	Location information provided by subscriber. Is optional.
P_PRIORITY	P_INT32	False	False	None	Priority for communication
P_OTHER_INFO	P_STRING	False	False	None	Additional information

11.11 Interface name definitions

This section defines the names to be used for obtaining interfaces from the corresponding service interfaces in each PAM SCF.

11.11.1 TpPAMProvisioningInterfaceName

This data type is identical to a TpString, and is defined as a string of characters that identify the names of the PAM Provisioning interfaces that are to be supported by the OSA API.

Character String Value	Description
P_PAM_IDENTITY_MANAGEMENT	The name for the PAM Identity Management interface.
P_PAM_AGENT_MANAGEMENT	The name for the PAM Agent Management interface
P_PAM_AGENT_ASSIGNMENT	The name for the PAM Agent Assignment interface
P_PAM_IDENTITY_TYPE_MANAGEMENT	The name for the PAM Identity Type Management interface
P_PAM_AGENT_TYPE_MANAGEMENT	The name for the PAM Agent Type Management interface
P_PAM_CAPABILITY_TYPE_MANAGEMENT	The name for the PAM Capability Type Management interface

11.11.2 TpPAMPresenceAvailabilityInterfaceName

This data type is identical to a TpString, and is defined as a string of characters that identify the names of the PAM Access interfaces that are to be supported by the OSA API.

Character String Value	Description
P_PAM_IDENTITY_PRESENCE	The name for the PAM Identity Presence interface.
P_PAM_AGENT_PRESENCE	The name for the PAM Agent Presence interface
P_PAM_AVAILABILITY	The name for the PAM Availability interface

11.11.3 TpPAMEventInterfaceName

This data type is identical to a TpString, and is defined as a string of characters that identify the names of the PAM Event management interfaces that are to be supported by the OSA API.

Character String Value	Description
P_PAM_EVENT_HANDLER	The name for the Event Handler interface.

11.12 Event data definitions

There are two sets of data structures used for events. One set is used by applications to provide information when registering for an event and the second set is used to supply information to the applications in the notifications when the events occur.

11.12.1 IpAppPAMEventHandlerRef

Defines a Reference to type IpAppPAMEventHandler.

11.12.2 TpPAMClientID

This is the same as TpInt32 and is used to identify, uniquely within an implementation, registration of an application interface for notification of events.

11.12.3 TpPAMEventID

This is the same as TpAssignmentID and is used to identify, uniquely within an implementation, a registration for a specific event.

11.12.4 TpPAMEventName

This data type identifies the values that specify the event names.

Name	Value	Description
PAM_CE_IDENTITY_PRESENCE_SET	0	Notify if the value of presence attributes of an identity is explicitly set
PAM_CE_AVAILABILITY_CHANGED	1	Notify if the availability of an identity changes
PAM_CE_WATCHERS_CHANGED	2	Notify if the current set of watchers change
PAM_CE_IDENTITY_CREATED	3	Notify if a new identity has been created
PAM_CE_IDENTITY_DELETED	4	Notify if an identity has been deleted
PAM_CE_GROUP_MEMBERSHIP_CHANGED	5	Notify if the membership of a group changes
PAM_CE_AGENT_CREATED	6	Notify if a new agent has been created
PAM_CE_AGENT_DELETED	7	Notify if an agent has been deleted
PAM_CE_AGENT_ASSIGNED	8	Notify if an agent is assigned to an identity
PAM_CE_AGENT_UNASSIGNED	9	Notify if an agent has been unassigned from an identity
PAM_CE_CAPABILITY_CHANGED	10	Notify if the capability of an identity changes
PAM_CE_AGENT_CAPABILITY_PRESENCE_SET	11	Notify if the value of presence attributes of an agent is explicitly set
PAM_CE_AGENT_PRESENCE_SET	12	Notify if the value of presence attributes of an agent is explicitly set

11.12.5 TpPAMEventNameList

This is a [Numbered List of Data Elements](#) of type TpPAMEventName.

Each event is defined by the data that applications must provide during registration using TpPAMEventInfo and data that is provided to the application during notification of such events using TpPAMNotificationInfo.

11.12.6 TpPAMEventInfo

This is a [tagged choice of data elements](#) that specifies the event data provided by applications while registering.

	Tag Element Type	
	TpPAMEventName	

Tag Element Value	Choice Element Type	Choice Element Name
PAM_CE_IDENTITY_PRESENCE_SET	TpPAMIPSEventData	IdentityPresenceSet
PAM_CE_AVAILABILITY_CHANGED	TpPAMAVCEventData	AvailabilityChanged
PAM_CE_WATCHERS_CHANGED	TpPAMWCEventData	WatchersChanged
PAM_CE_IDENTITY_CREATED	TpPAMICEventData	IdentityCreated
PAM_CE_IDENTITY_DELETED	TpPAMIDEVENTData	IdentityDeleted
PAM_CE_GROUP_MEMBERSHIP_CHANGED	TpPAMGMCEVENTData	GroupMembershipChanged
PAM_CE_AGENT_CREATED	TpPAMACEVENTData	AgentCreated
PAM_CE_AGENT_DELETED	TpPAMADEVENTData	AgentDeleted
PAM_CE_AGENT_ASSIGNED	TpPAMAAEVENTData	AgentAssigned
PAM_CE_AGENT_UNASSIGNED	TpPAMAUEVENTData	AgentUnassigned
PAM_CE_CAPABILITY_CHANGED	TpPAMCCEVENTData	CapabilityChanged
PAM_CE_AGENT_CAPABILITY_PRESENCE_SET	TpPAMACPSEventData	AgentCapabilityPresenceSet
PAM_CE_AGENT_PRESENCE_SET	TpPAMAPSEVENTData	AgentPresenceSet

11.12.7 TpPAMEventInfoList

This is a [Numbered List of Data Elements](#) of type TpPAMEventInfo.

11.12.8 TpPAMNotificationInfo

This is a [tagged choice of data elements](#) that specifies the notification data provided to the applications for each event.

	Tag Element Type	
	TpPAMEventName	

Tag Element Value	Choice Element Type	Choice Element Name
PAM_CE_IDENTITY_PRESENCE_SET	TpPAMIPSNotificationData	IdentityPresenceSetNotify
PAM_CE_AVAILABILITY_CHANGED	TpPAMAVCNotificationData	AvailabilityChangedNotify
PAM_CE_WATCHERS_CHANGED	TpPAMWCNotificationData	WatchersChangedNotify
PAM_CE_IDENTITY_CREATED	TpPAMICNotificationData	IdentityCreatedNotify
PAM_CE_IDENTITY_DELETED	TpPAMIDNotificationData	IdentityDeletedNotify
PAM_CE_GROUP_MEMBERSHIP_CHANGED	TpPAMGMCNotificationData	GroupMembershipChangedNotify
PAM_CE_AGENT_CREATED	TpPAMACNotificationData	AgentCreatedNotify
PAM_CE_AGENT_DELETED	TpPAMADNotificationData	AgentDeletedNotify
PAM_CE_AGENT_ASSIGNED	TpPAMAANotificationData	AgentAssignedNotify
PAM_CE_AGENT_UNASSIGNED	TpPAMAUNotificationData	AgentUnassignedNotify
PAM_CE_CAPABILITY_CHANGED	TpPAMCCNotificationData	CapabilityChangedNotify
PAM_CE_AGENT_CAPABILITY_PRESENCE_SET	TpPAMACPSNotificationData	AgentCapabilityPresenceSetNotify
PAM_CE_AGENT_PRESENCE_SET	TpPAMAPSNotificationData	AgentPresenceSetNotify

11.12.9 TpPAMNotificationInfoList

This is a [Numbered List of Data Elements](#) of type TpPAMNotificationInfo.

11.12.10 PAM_CE_IDENTITY_CREATED

Notify if a new identity has been created. Notifications for creation of multiple identities are bunched into a single notification whenever possible. A notification of this event is NOT sent for new association of types with an existing identity.

11.12.10.1TpPAMICEventData

This is a [Sequence of Data Elements](#) to specify the input data for subscribing to identity creations. The event is registered for changes in any agents of the named type. If no identity types are named, then the event is registered for all identity types.

Sequence Element Name	Sequence Element Type	Notes
IdentityType	TpStringList	Specifies the type of the identities for which this notification is requested. Can be an empty array if notification required for identities of any type.

11.12.10.2TpPAMICNotificationData

This is a [Sequence of Data Elements](#) to specify the data that is provided in the notifications for identity creation events.

Sequence Element Name	Sequence Element Type	Notes
Identities	TpPAMFQNameList	Contains the names of the identities that have been created.

11.12.11 PAM_CE_IDENTITY_DELETED

Notify if an identity has been deleted. Notifications for deletion of multiple identities are bunched into a single notification whenever possible. A notification of this event is NOT sent for removing association of types with an existing identity.

11.12.11.1TpPAMIDEventData

This is a [Sequence of Data Elements](#) to specify the input data for subscribing to identity deletions. The event is registered for changes in any of the named identities. If no identities are named, then the event is registered for all agents.

Sequence Element Name	Sequence Element Type	Notes
IdentityName	TpPAMFQNameList	Specifies the name of the identity whose deletion is to be notified. Can be an empty array
IdentityType	TpStringList	Specifies the type of the identity for which this notification is requested if identityName is an empty array. Can be an empty array if notification required for identities of any type

11.12.11.2TpPAMIDNotificationData

This is a Sequence of Data Elements to specify the data that is provided in the notifications for identity deletion events.

Sequence Element Name	Sequence Element Type	Notes
Identities	TpPAMFQNameList	Contains the names of the identities that have been deleted.

11.12.12 PAM_CE_GROUP_MEMBERSHIP_CHANGED

Notify if the membership of a group changes. Notifications for changes to multiple groups are bunched into a single notification whenever possible.

11.12.12.1TpPAMGMCEventData

This is a Sequence of Data Elements to specify the input data for subscribing to group membership changes. The event is registered for changes in any of the named groups. If no groups are named, then the event is registered for all groups.

Sequence Element Name	Sequence Element Type	Notes
GroupName	TpPAMFQNameList	Specifies the name of the group for which the change is to be notified. Can be an empty array if notifications are required for any group.
GroupType	TpStringList	Specifies the type of the group for which this notification is requested if the groupName is specified as an empty array. Can be an empty array if notification required for groups of any type.

11.12.12.2TpPAMGMCNotificationData

This is a Sequence of Data Elements to specify the data that is provided in the notifications for group membership changes.

Sequence Element Name	Sequence Element Type	Notes
Groups	TpPAMFQNameList	Contains the names of the groups that have been changed.

11.12.13 PAM_CE_AGENT_CREATED

Notify if a new agent has been created. Notifications for creation of multiple agents are bunched into a single notification whenever possible. The notification for this event is NOT sent for new associations of types with agents.

11.12.13.1TpPAMACEventData

This is a Sequence of Data Elements to specify the input data for subscribing to agent creations. The event is registered for changes in any agents of the named type. If no agent types are named, then the event is registered for all agent types.

Sequence Element Name	Sequence Element Type	Notes
AgentType	TpStringList	Specifies the type of the agents for which this notification is requested. Can be an empty array if notification required for agents of any type

11.12.13.2TpPAMACNotificationData

This is a Sequence of Data Elements to specify the data that is provided in the notifications for agent creation events.

Sequence Element Name	Sequence Element Type	Notes
Agents	TpPAMFQNameList	Contains the names of the agents that have been created.

11.12.14 PAM_CE_AGENT_DELETED

Notify if an agent has been deleted. Notifications for deletion of multiple agents are bunched into a single notification whenever possible. This event notification is NOT sent for disassociating a type from an agent.

11.12.14.1TpPAMADEventData

This is a Sequence of Data Elements to specify the input data for subscribing to agent deletions. The event is registered for changes in any of the named agents. If no agents are named, then the event is registered for all agents.

Sequence Element Name	Sequence Element Type	Notes
AgentName	TpPAMFQNameList	Specifies the name of the agent whose deletion is to be notified. Can be an empty array
AgentType	TpStringList	Specifies the type of the agent for which this notification is requested if agentName is an empty array. Can be an empty array if notification required for agents of any type

11.12.14.2TpPAMADNotificationData

This is a Sequence of Data Elements to specify the data that is provided in the notifications for agent deletion events.

Sequence Element Name	Sequence Element Type	Notes
Agents	TpPAMFQNameList	Contains the names of the agents that have been deleted.

11.12.15 PAM_CE_AGENT_ASSIGNED

Notify if an agent is assigned to an identity.

11.12.15.1TpPAMAAEventData

This is a Sequence of Data Elements to specify the input data for subscribing to agent assignments from an identity. The event is registered for changes in any of the named agents. If no agents are named, then the event is registered for any agent.

Sequence Element Name	Sequence Element Type	Notes
IdentityName	TpPAMFQNameList	Specifies the name of the identity for which the assignment is to be notified. Can be an empty array if notification is required for any identity instance.
IdentityType	TpStringList	Specifies the type of the identity for which this notification is requested if the identityName is specified as an empty array. Can be an empty array if notification required for identities of any type.
AgentName	TpPAMFQNameList	Specifies the name of the agent whose assignment is to be notified. Can be an empty array
AgentType	TpStringList	Specifies the type of the agent for which this notification is requested if agentName is an empty array. Can be an empty array if notification required for agents of any type

11.12.15.2TpPAMAANotificationData

This is a Sequence of Data Elements to specify the data that is provided in the notifications for agent assignment events.

Sequence Element Name	Sequence Element Type	Notes
Identity	TpPAMFQName	Contains the name of the identity to whom an agent has been assigned.
Agent	TpPAMFQName	Contains the name of the agent that has been assigned.

11.12.16 PAM_CE_AGENT_UNASSIGNED

Notify if an agent has been unassigned from an identity.

11.12.16.1TpPAMAUEventData

This is a Sequence of Data Elements to specify the input data for subscribing to agent unassignments from an identity. The event is registered for changes in any of the named agents. If no agents are named, then the event is registered for all assigned agents.

Sequence Element Name	Sequence Element Type	Notes
IdentityName	TpPAMFQNameList	Specifies the name of the identity for which the unassignment is to be notified. Can be an empty array if notification is required for any identity instance.
IdentityType	TpStringList	Specifies the type of the identity for which this notification is requested if the identityName is specified as an empty array. Can be an empty array if notification required for identities of any type.
AgentName	TpPAMFQNameList	Specifies the name of the agent whose unassignment is to be notified. Can be an empty array.
AgentType	TpStringList	Specifies the type of the agent for which this notification is requested if agentName is an empty array. Can be an empty array if notification required for agents of any type.

11.12.16.2TpPAMAUNotificationData

This is a Sequence of Data Elements to specify the data that is provided in the notifications for agent unassignment events.

Sequence Element Name	Sequence Element Type	Notes
Identity	TpPAMFQName	Contains the name of the identity from whom an agent has been unassigned.
Agent	TpPAMFQName	Contains the name of the agent that has been unassigned.

11.12.17 PAM_CE_CAPABILITY_CHANGED

Notify if the capability of an identity changes.

11.12.17.1TpPAMCCEventData

This is a Sequence of Data Elements to specify the input data for subscribing to identity capability changed events. The event is registered for changes in any of the named capabilities. If no capabilities are named, then the event is registered for all capabilities.

Sequence Element Name	Sequence Element Type	Notes
IdentityName	TpPAMFQNameList	Specifies the name of the identity for which the capability change is to be notified. Can be an empty array if notification is required for any identity instance.
IdentityType	TpStringList	Specifies the type of the identity for which this notification is requested if the identityName is specified as an empty array. Can be an empty array if notification required for identities of any type.
Capabilities	TpPAMCapabilityList	Specifies the capabilities of interest. Can be an empty array if notifications are required for any capability.

11.12.17.2TpPAMCCNotificationData

This is a Sequence of Data Elements to specify the data that is provided in the notifications for capability change events.

Sequence Element Name	Sequence Element Type	Notes
Identity	TpPAMFQName	Contains the name of the identity whose capability has changed.
Capabilities	TpPAMCapabilityList	Contains the capabilities that have changed (i.e., added or removed).

11.12.18 PAM_CE_AGENT_CAPABILITY_PRESENCE_SET

Notify if the value of capability presence attributes of an agent is set. Expiration of the dynamic attributes does not trigger this notification.

11.12.18.1TpPAMACPSEventData

This is a Sequence of Data Elements to specify the input data for subscribing to agent capability presence set events. The event is registered for changes in any of the named attributes. If no attributes are named, then the event is registered for all attributes in the presence information.

Sequence Element Name	Sequence Element Type	Notes
AgentName	TpPAMFQNameList	Specifies the name of the agent for which the capability presence change is to be notified. Can be an empty array if notification is required for any agent instance.
AgentType	TpStringList	Specifies the type of the agent for which this notification is requested if the agentName is specified as an empty array. Can be an empty array if notification required for agents of any type.
Capabilities	TpPAMCapabilityList	Specifies the capabilities of interest. Can be an empty array if notifications are required for any capability.
AttributeNames	TpStringList	Specifies attributes of interest. Can be an empty array
ReportingPeriod	TpPAMTimeInterval	Specifies the interval for periodic reporting (regardless of change). If -1, the event notification happens only on a change. If 0, there is a single immediate notification.

11.12.18.2TpPAMACPSNotificationData

This is a Sequence of Data Elements to specify the data that is provided in the notifications for capability presence set events.

Sequence Element Name	Sequence Element Type	Notes
Agent	TpPAMFQName	Contains the name of the agent whose capability presence has changed
Capability	TpPAMCapability	Specifies the capability for which the presence has changed.
AttributeNames	TpStringList	Contains the attribute names that have changed in value

11.12.19 PAM_CE_AGENT_PRESENCE_SET

Notify if the value of presence attributes of an agent is set. Expiration of the dynamic attributes does not trigger this notification.

11.12.19.1TpPAMAPSEventData

This is a Sequence of Data Elements to specify the input data for subscribing to agent presence set events. The event is registered for changes in any of the named attributes. If no attributes are named, then the event is registered for all attributes in the presence information.

Sequence Element Name	Sequence Element Type	Notes
AgentName	TpPAMFQNameList	Specifies the name of the agent for which the assignment is to be notified. Can be an empty array if notification is required for any agent instance.
AgentType	TpStringList	Specifies the type of the agent for which this notification is requested if the agentName is specified as an empty array. Can be an empty array if notification required for agents of any type.
AttributeNames	TpStringList	Specifies attributes of interest. Can be an empty array.
ReportingPeriod	TpPAMTimeInterval	Specifies the interval for periodic reporting (regardless of change). If -1, the event notification happens only on a change. If 0, there is a single immediate notification.

11.12.19.2TpPAMAPSNotificationData

This is a Sequence of Data Elements to specify the data that is provided in the notifications for agent presence set events.

Sequence Element Name	Sequence Element Type	Notes
Agent	TpPAMFQName	Contains the name of the agent whose capability has changed
AttributeNames	TpStringList	Contains the attribute names that have changed in value

11.12.20 PAM_CE_IDENTITY_PRESENCE_SET

Notify if the value of presence attributes of an identity is set. Expiration of the dynamic attributes does not trigger this notification.

11.12.20.1TpPAMIPSEventData

This is a Sequence of Data Elements to specify the input data for subscribing to identity presence set events. The event is registered for changes in any of the named attributes. If no attributes are named, then the event is registered for all attributes in the presence information.

Sequence Element Name	Sequence Element Type	Notes
IdentityName	TpPAMFQNameList	Specifies the name of the identity for which the assignment is to be notified. Can be an empty array if notification is required for any identity instance.
IdentityType	TpStringList	Specifies the type of the identity for which this notification is requested if the identityName is specified as an empty array. Can be an empty array if notification required for identities of any type.
AttributeNames	TpStringList	Specifies attributes of interest. Can be an empty array.
ReportingPeriod	TpPAMTimeInterval	Specifies the interval for periodic reporting (regardless of change). If -1, the event notification happens only on a change. If 0, there is a single immediate notification even if there is no change. For all other values, there is a periodic notification at the specified time interval regardless of change.

11.12.20.2TpPAMIPSNotificationData

This is a Sequence of Data Elements to specify the data that is provided in the notifications for identity presence set events.

Sequence Element Name	Sequence Element Type	Notes
Identity	TpPAMFQName	Contains the name of the identity whose capability has changed
Attributes	TpPAMPresenceDataList	Contains the attributes that have changed in value

11.12.21 PAM_CE_AVAILABILITY_CHANGED

Notify if the availability of an identity changes. The event is registered for changes in any of the named attributes. If no attributes are named, then the event is registered for all attributes in the presence information.

11.12.21.1TpPAMAVCEventData

This is a [Sequence of Data Elements](#) to specify the input data for subscribing to availability changed events.

Sequence Element Name	Sequence Element Type	Notes
IdentityName	TpPAMFQNameList	Specifies the name of the identity for which the assignment is to be notified. Can be an empty array if notification is required for any identity instance.
IdentityType	TpStringList	specifies the type of the identity for which this notification is requested if the identityName is specified as an empty array. Can be an empty array if notification required for identities of any type.
PAMContext	TpPAMContextList	Specifies the context in which the availability is to be monitored. Cannot be an empty array
AttributeNames	TpStringList	Specifies attributes of interest. Can be an empty array
ReportingPeriod	TpPAMTimeInterval	Specifies the interval for periodic reporting (regardless of change). If -1, the event notification happens only on a change. If 0, there is a single immediate notification even if there is no change. For all other values, there is a periodic notification at the specified time interval regardless of change.

11.12.21.2TpPAMAVCNotificationData

This is a [Sequence of Data Elements](#) to specify the data that is provided in the notifications for availability changed events.

Sequence Element Name	Sequence Element Type	Notes
Identity	TpPAMFQName	Contains the name of the identity whose capability has changed
Availability	TpPAMAvailabilityProfileList	Contains the availability information that has changed

11.12.22 PAM_CE_WATCHERS_CHANGED

Notify if list of watchers for any event changed.

11.12.22.1TpPAMWCEventData

This is a [Sequence of Data Elements](#) to specify the input data for subscribing to watchers changed events.

Sequence Element Name	Sequence Element Type	Notes
Events	TpPAMEventNameList	Specifies the list of events for which the watchers are to be monitored. Can be an empty array if notification is required for watchers to any event
IdentityName	TpPAMFQNameList	Specifies the name of an identity for whom the change in watchers is to be notified. Can be an empty array if notification is required for any identity instance.
IdentityType	TpStringList	specifies the type of the identity for which this notification is requested if the identityName is specified as an empty array. Can be an empty array if notification required for identities of any type.
ReportingPeriod	TpPAMTimeInterval	Specifies the interval for periodic reporting (regardless of change). If -1, the event notification happens only on a change. If 0, there is a single immediate notification even if there is no change. For all other values, there is a periodic notification at the specified time interval regardless of change.

11.12.22.2TpPAMWCNotificationData

This is a [Sequence of Data Elements](#) to specify the data that is provided in the notifications for watchers changed events.

Sequence Element Name	Sequence Element Type	Notes
Event	TpPAMEventName	Contains the name of the event for which the watchers changed
ChangeType	TpPAMwatcherChangeType	Specifies whether the listed watchers were added or deleted
Identity	TpPAMFQName	Contains the name of the identity whose capability has changed
Watchers	TpPAMFQNameList	Contains the list of watchers involved in the change

11.12.22.3TpPAMwatcherChangeType

This specifies the values representing the type of change that occurred to the list of watchers.

Name	Value	Description
PAM_WATCHERS_PERIODIC	0	Periodic reporting, not necessarily a change.
PAM_WATCHERS_ADDED	1	Watchers added to the list
PAM_WATCHERS_DELETED	2	Watchers deleted from the list

11.13 Error Types

11.13.1 TpPAMErrorCause

This defines the types of errors reported by PAM.

Name	Value	Description
P_PAM_CAUSE_UNDEFINED	0	Undefined.
P_PAM_CAUSE_INVALID_ADDRESS	1	The request cannot be handled because the address specified is not valid.
P_PAM_CAUSE_SYSTEM_FAILURE	2	System failure. The request cannot be handled because of a general problem in the service or in the underlying network.
P_PAM_CAUSE_INFO_UNAVAILABLE	3	The information is currently not available.
P_PAM_CAUSE_EVENT_REGISTRATION_CANCELLED	4	The registration for the event has been cancelled by the service.

11.13.2 TpPAMErrorInfo

This is a [Sequence of Data Elements](#) to specify the error notification data.

Sequence Element Name	Sequence Element Type	Description
Cause	TpPAMErrorCause	Contains information about the reason for the error
ErrorData	TpPAMNotificationInfo	Contains information relevant to each error such as the identity for which the error exists and/or the attributes for which the error exists

12 Presence and Availability Management Exception Classes

The following are the list of exception classes which are used in this interface of the API.

Name	Description
P_PAM_AGENT_EXISTS	indicates that an Agent with the <i>agentName</i> already exists
P_PAM_ALIAS_EXISTS	indicates that the specified alias is already associated to the Identity
P_PAM_ALIAS_NOT_UNIQUE	indicates that the alias has already been assigned to another identity
P_PAM_ATTRIBUTE_EXISTS	indicates that at least one of the named attributes already exists
P_PAM_DISASSOCIATED_TYPE	indicates that one of the specified types is not associated with the named identity/agent
P_PAM_IDENTITY_EXISTS	indicates that the specified Identity already exists
P_PAM_INVALID_CREDENTIAL	indicates that the credential presented is not recognized or insufficient for the operation
P_PAM_IS_CYCLIC	indicates that the requested operation will create cyclic relationship
P_PAM_MEMBER_EXISTS	indicates that the specified member is already in the group
P_PAM_NO_CAPABILITY	indicates that a supplied capability is not a capability of the requested agent. No attributes are affected
P_PAM_NOT_MEMBER	indicates that the specified member is not member of the group
P_PAM_NOT_REGISTERED	indicates that the interface was not previously registered
P_PAM_NOT_SUPPORTED	implementation dependent status that indicates that this method is not supported by the implementation
P_PAM_TYPE_ASSOCIATED	indicates that a named type has already been associated with the identity/agent
P_PAM_TYPE_EXISTS	indicates that the named type already exists
P_PAM_UNASSIGNED_ALIAS	indicates that the specified alias was not an alias of the named identity
P_PAM_UNAVAILABLE_INTERFACE	indicates that the specified interface does not exist or is unavailable
P_PAM_UNKNOWN_AGENT	indicates that the Agent with the specified name does not exist
P_PAM_UNKNOWN_ALIAS	indicates that the Alias with the specified name does not exist
P_PAM_UNKNOWN_ASSIGNMENT	indicates that no assignment exists for this identity and agent
P_PAM_UNKNOWN_ATTRIBUTE	indicates that at least one of the specified attributes has not been defined or has not been associated with the specified object
P_PAM_UNKNOWN_ATTRIBUTES	indicates that the specified attribute list contains attributes not part of the named object
P_PAM_UNKNOWN_CAPABILITY	indicates that a supplied capability is not a capability of the requested agent, or has not been defined. No attributes are affected
P_PAM_UNKNOWN_GROUP	indicates that the specified group identity does not exist
P_PAM_UNKNOWN_IDENTITY	indicates that the specified identity does not exist
P_PAM_UNKNOWN_MEMBER	indicates that the specified member identity does not exist
P_PAM_UNKNOWN_TYPE	indicates that the named type does not exist / indicates that the named identity/agent has not been associated with the named type / indicates that a specified type name has not been defined as an agent type

Each exception class contains the following structure.

Structure Element Name	Structure Element Type	Structure Element Description
ExtraInformation	TpString	Carries extra information to help identify the source of the exception, e.g. a parameter name

Annex A (normative): OMG IDL Description of Presence and Availability Management SCF

The OMG IDL representation of this interface specification is contained in text files (pam_interfaces, pam_data.idl) contained in archive 2919814V700IDL.ZIP which accompanies the present document.

Annex B (informative): W3C WSDL Description of the Presence and Availability Management SCFs

The W3C WSDL representation of this interface specification is contained in zip file 2919814V700WSDL.ZIP, which accompanies the present document.

Annex C (informative): Java™ API Description of the Presence and Availability Management SCFs

The Java™ API realisation of this interface specification is produced in accordance with the Java™ Realisation rules defined in Part 1 of this specification series. These rules aim to deliver for Java™, a developer API, provided as a realisation, supporting a Java™ API that represents the UML specifications. The rules support the production of both J2SE™ and J2EE™ versions of the API from the common UML specifications.

The J2SE™ representation of this interface specification is provided as Java™ Code, contained in archive 2919814V700J2SE.ZIP that accompanies the present document.

The J2EE™ representation of this interface specification is provided as Java™ Code, contained in archive 2919814V700J2EE.ZIP that accompanies the present document.

Annex D (informative): Description of Presence and Availability Management for 3GPP2 cdma2000 networks

This annex is intended to define the OSA API Stage 3 interface definitions and it provides the complete OSA specifications. It is an extension of OSA API specifications capabilities to enable operation in cdma2000 systems environment. They are in alignment with 3GPP2 Stage 1 requirements and Stage 2 architecture defined in

- [1] 3GPP2 P.S0001-B: "Wireless IP Network Standard", Version 1.0, September 2000;
- [2] 3GPP2 S.R0037-0: "IP Network Architecture Model for cdma2000 Spread Spectrum Systems", Version 2.0, May 14, 2002;
- [3] 3GPP2 X.S0013: "All-IP Core Network Multimedia Domain", December 2003.

These requirements are expressed as additions to and/or exclusions from the 3GPP Release 7 specification. The information given here is to be used by developers in 3GPP2 cdma2000 network architecture to interpret the 3GPP OSA specifications.

D.1 General Exceptions

The term UMTS is not applicable for the cdma2000 family of standards. Nevertheless these terms are used (3GPP TR 21.905) mostly in the broader sense of "3G Wireless System". If not stated otherwise there are no additions or exclusions required.

CAMEL and CAP mappings are not applicable for cdma2000 systems.

D.2 Specific Exceptions

D.2.1 Clause 1: Scope

There are no additions or exclusions.

D.2.2 Clause 2: References

Normative references on 3GPP TS 23.078 and on 3GPP TS 29.078 are not applicable for cdma2000 systems.

D.2.3 Clause 3: Definitions and abbreviations

There are no additions or exclusions.

D.2.4 Clause 4: Presence and Availability Management SCF

There are no additions or exclusions.

D.2.5 Clause 5: Sequence Diagrams

There are no additions or exclusions.

D.2.6 Clause 6 Class Diagrams

There are no additions or exclusions.

D.2.7 Clause 7: The Service Interface Specifications

There are no additions or exclusions.

D.2.8 Clause 8: Presence and Availability Management Interface Classes

There are no additions or exclusions.

D.2.9 Clause 9: State Transition Diagrams

There are no additions or exclusions.

D.2.10 Clause 10: PAM Service Properties

There are no additions or exclusions.

D.2.11 Clause 11: PAM Data Definitions

There are no additions or exclusions.

D.2.12 Clause 12: Presence and Availability Management Exception Classes

There are no additions or exclusions.

D.2.13 Annex A (normative):OMG IDL Description of Presence and Availability Management SCF

There are no additions or exclusions.

D.2.14 Annex C (informative): Java™ API Description of Presence and Availability Management SCF

There are no additions or exclusions.

Annex E (informative): Change history

Change history							Old	New
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment			
Mar 2007	CT_35	CP-070047	0026	--	Update document for conversion to Release 7		6.3.1	7.0.0

History

Document history		
V7.0.0	March 2007	Publication