

ETSI TS 129 523 V16.4.0 (2021-01)



**5G;
5G System;
Policy Control Event Exposure Service;
Stage 3
(3GPP TS 29.523 version 16.4.0 Release 16)**



Reference

RTS/TSGC-0329523vg40

Keywords

5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2021.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M™ logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope	6
2 References	6
3 Definitions, symbols and abbreviations	7
3.1 Definitions	7
3.2 Abbreviations	7
4 Npcf_EventExposure Service.....	8
4.1 Service Description	8
4.1.1 Overview	8
4.1.2 Service Architecture	8
4.1.3 Network Functions.....	9
4.1.3.1 Policy Control Function (PCF)	9
4.1.3.2 NF Service Consumers.....	9
4.2 Service Operations	10
4.2.1 Introduction.....	10
4.2.2 Npcf_EventExposure_Subscribe service operation	10
4.2.2.1 General	10
4.2.2.2 Creating a new subscription	10
4.2.2.3 Modifying an existing subscription.....	12
4.2.3 Npcf_EventExposure_UnSubscribe service operation	13
4.2.3.1 General	13
4.2.3.2 Unsubscription from event notifications	13
4.2.4 Npcf_EventExposure_Notify service operation	14
4.2.4.1 General	14
4.2.4.2 Notification about subscribed events	14
5 Npcf_EventExposure Service API	16
5.1 Introduction	16
5.2 Usage of HTTP.....	16
5.2.1 General.....	16
5.2.2 HTTP standard headers.....	17
5.2.2.1 General	17
5.2.2.2 Content type	17
5.2.3 HTTP custom headers.....	17
5.2.3.1 General	17
5.3 Resources	17
5.3.1 Resource Structure.....	17
5.3.2 Resource: Policy Control Events Subscriptions (Collection)	18
5.3.2.1 Description	18
5.3.2.2 Resource definition	18
5.3.2.3 Resource Standard Methods.....	18
5.3.2.3.1 POST	18
5.3.2.4 Resource Custom Operations	18
5.3.3 Resource: Individual Policy Control Events Subscription (Document).....	19
5.3.3.1 Description	19
5.3.3.2 Resource definition	19
5.3.3.3 Resource Standard Methods.....	19
5.3.3.3.1 GET	19
5.3.3.3.2 PUT	20
5.3.3.3.3 DELETE.....	21
5.3.3.4 Resource Custom Operations	22

5.4	Custom Operations without associated resources.....	22
5.5	Notifications	22
5.5.1	General.....	22
5.5.2	Policy Control Event Notification	22
5.5.2.1	Description	22
5.5.2.2	Target URI	22
5.5.2.3	Standard Methods	23
5.5.2.3.1	POST	23
5.6	Data Model.....	24
5.6.1	General.....	24
5.6.2	Structured data types.....	25
5.6.2.1	Introduction.....	25
5.6.2.2	Type PcEventExposureSubsc.....	26
5.6.2.3	Type PcEventExposureNotif.....	26
5.6.2.4	Type ReportingInformation.....	27
5.6.2.5	Type ServiceIdentification	27
5.6.2.6	Type EthernetFlowInfo	28
5.6.2.7	Type IpFlowInfo	28
5.6.2.8	Type PcEventNotification.....	29
5.6.2.9	Type PduSessionInformation	30
5.6.3	Simple data types and enumerations	30
5.6.3.1	Introduction.....	30
5.6.3.2	Simple data types	30
5.6.3.3	Enumeration: PcEvent.....	30
5.7	Error handling	30
5.7.1	General.....	30
5.7.2	Protocol Errors.....	31
5.7.3	Application Errors	31
5.8	Feature negotiation.....	31
5.9	Security	31
Annex A (normative): OpenAPI specification.....		33
A.1	General	33
A.2	Npcf_EventExposure API	33
Annex B (informative): Change history		41
History		42

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document specifies the stage 3 protocol and data model for the Policy Control Event Exposure Service of the 5G System. It provides stage 3 protocol definitions, message flows and specifies the API for the Npcf Event Exposure service.

The 5G System stage 2 architecture and the procedures are specified in 3GPP TS 23.501 [2], 3GPP TS 23.502 [3] and 3GPP TS 23.503 [4].

The 5G System stage 3 call flows are provided in 3GPP TS 29.513 [8].

The Technical Realization of the Service Based Architecture and the Principles and Guidelines for Services Definition are specified in 3GPP TS 29.500 [5] and 3GPP TS 29.501 [6].

The Policy Control Event Exposure Service is provided by the Policy Control Function (PCF). This service exposes policy control events observed at the PCF.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [3] 3GPP TS 23.502: "Procedures for the 5G System; Stage 2".
- [4] 3GPP TS 23.503: "Policy and Charging Control Framework for the 5G System; Stage 2".
- [5] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [6] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [7] OpenAPI: "OpenAPI 3.0.0 Specification", <https://github.com/OAI/OpenAPI-Specification/blob/master/versions/3.0.0.md>.
- [8] 3GPP TS 29.513: "5G System; Policy and Charging Control signalling flows and QoS parameter mapping; Stage 3".
- [9] 3GPP TS 29.512: "5G System; Session Management Policy Control Service; Stage 3".
- [10] 3GPP TS 29.507: "5G System; Access and Mobility Policy Control Service; Stage 3".
- [11] 3GPP TS 29.525: "5G System; UE Policy Control Service; Stage 3".
- [12] 3GPP TS 29.514: "5G System; Policy Authorization Service; Stage 3".
- [13] 3GPP TS 29.214: "Policy and Charging Control over Rx reference point".
- [14] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".
- [15] 3GPP TS 29.508: "5G System; Session Management Event Exposure Service; Stage 3".
- [16] IETF RFC 7540: "Hypertext Transfer Protocol Version 2 (HTTP/2)".

- [17] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [18] IETF RFC 7807: "Problem Details for HTTP APIs".
- [19] 3GPP TS 33.501: "Security architecture and procedures for 5G system".
- [20] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [21] 3GPP TS 29.510: "5G System; Network Function Repository Services; Stage 3".
- [22] 3GPP TR 21.900: "Technical Specification Group working methods".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

example: text used to clarify abstract rules by applying them literally.

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

AF	Application Function
AMF	Access and Mobility Management Function
API	Application Programming Interface
ATSSS	Access Traffic Steering, Switching and Splitting
DNN	Data Network Name
ePDG	evolved Packet Data Gateway
GPSI	Generic Public Subscription Identifier
HTTP	Hypertext Transfer Protocol
MA	Multi-Access
NEF	Network Exposure Function
NID	Network Identifier
NF	Network Function
NRF	Network Repository Function
NWDAF	Network Data Analytics Function
OAM	Operation And Maintenance
PCF	Policy Control Function
RFSP	RAT Frequency Selection Priority
S-NSSAI	Single Network Slice Selection Assistance Information
SMF	Session Management Function
SNPN	Stand-alone Non-Public Network
SUPI	Subscription Permanent Identifier
UDM	Unified Data Management
UDR	Unified Data Repository
URSP	UE Route Selection Policy

4 Npcf_EventExposure Service

4.1 Service Description

4.1.1 Overview

The Policy Event Exposure Service, as defined in 3GPP TS 23.502 [3] and 3GPP TS 23.503 [4], is provided by the Policy Control Function (PCF).

This service:

- allows NF service consumers to subscribe, modify and unsubscribe from policy control events; and
- notifies NF service consumers with a corresponding subscription about observed events on the PCF.

The types of observed events include:

- PLMN identifier notification; and
- Access type change.

The target of the event reporting may include a group of UE(s) or any UE (i.e. all UEs). When an event occurs, to which the NF service consumer has subscribed, the PCF reports the requested information to the NF service consumer based on the event reporting information definition requested by the NF service consumer (see 3GPP TS 23.502 [3], subclause 4.15.1).

4.1.2 Service Architecture

The 5G System Architecture is defined in 3GPP TS 23.501 [2]. The Policy and Charging related 5G architecture and signalling flows are also described in 3GPP TS 29.513 [8].

The Policy Event Exposure Service (Npcf_EventExposure) is part of the Npcf service-based interface exhibited by the Policy Control Function (PCF).

The known NF service consumer of the Npcf_EventExposure service are the Network Exposure Function (NEF) and the Network Data Analytics Function (NWDAF).

The Npcf_EventExposure service is provided by the PCF and consumed by NF service consumers (e.g. NEF, NWDAF), as shown in figure 4.1.2-1 for the SBI representation model and in figure 4.1.2-2 for reference point representation model.

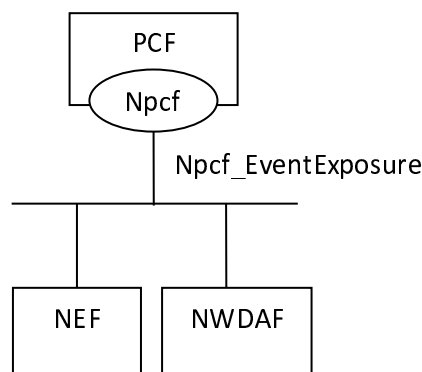
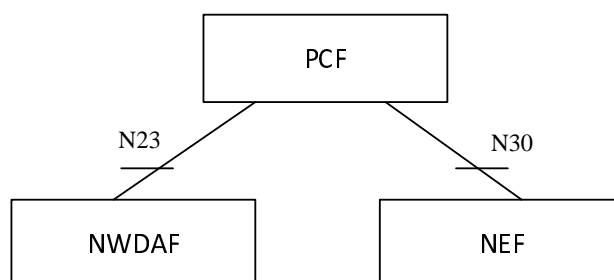


Figure 4.1.2-1: Npcf_EventExposure service Architecture, SBI representation**Figure 4.1.2-2: Npcf_EventExposure service Architecture, reference point representation**

4.1.3 Network Functions

4.1.3.1 Policy Control Function (PCF)

The PCF (Policy Control Function) is a functional element that encompasses policy control decision and flow based charging control functionalities as defined in 3GPP TS 29.512 [9], access and mobility policy decisions for the control of the UE Service Area Restrictions and RAT/RFSP control as defined in 3GPP TS 29.507 [10] and UE Policy decisions for the control of Access network discovery and selection policy and UE Route Selection Policy (URSP) as defined in 3GPP TS 29.525 [11].

The policy control decision and flow based charging control functionalities enable the PCF to provide network control regarding the service data flow detection, gating, QoS and flow based charging (except credit management) towards the SMF/UPF. The PCF offers these capabilities to the NF service consumers (e.g. the AF and NEF) as defined in 3GPP TS 29.514 [12] and 3GPP TS 29.214 [13].

The Policy Event Exposure Service enables the PCF to report policy control events observed in one or more PCF services to NF service consumers.

4.1.3.2 NF Service Consumers

As indicated in subclause 4.1.2 above, the known NF service consumer of the Npcf_EventExposure service are the Network Exposure Function (NEF) and the Network Data Analytics Function (NWDAF).

The Network Exposure Function (NEF) is a functional element that supports the following functionalities:

- The NEF securely exposes network capabilities and events provided by 3GPP NFs to AF.
- The NEF provides a means for the AF to securely provide information to 3GPP network and can authenticate, authorize and assist in throttling the AF.
- The NEF translates the information received from the AF to the one sent to internal 3GPP NFs, and vice versa.
- The NEF supports exposing information (collected from other 3GPP NFs) to the AF.

The Network Data Analytics Function (NWDAF) is a NF that provides network data analytics services to 5GC NFs and OAM. It supports for this purpose the following functionalities:

- The NWDAF performs data collection based on subscription to events provided by AMF, SMF, PCF, UDM, AF (directly or via NEF), and OAM.
- The NWDAF retrieves information from data repositories (e.g. UDR via UDM for subscriber-related information).
- The NWDAF retrieves information about NFs (e.g. from NRF for NF-related information).

- The NWDAF provides on demand network data analytics to consumers (e.g. 5GC NFs, OAM).

4.2 Service Operations

4.2.1 Introduction

Service operations defined for the Npcf_EventExposure Service are shown in table 4.2.1-1.

Table 4.2.1-1: Npcf_EventExposure Service Operations

Service Operation Name	Description	Initiated by
Npcf_EventExposure_Subscribe	This service operation is used by an NF service consumer to subscribe for event notifications on a specified policy control event for a group of UE(s) or any UE, or to modify a subscription.	NF service consumer (NEF, NWDAF)
Npcf_EventExposure_Unsubscribe	This service operation is used by an NF service consumer to unsubscribe from event notifications.	NF service consumer (NEF, NWDAF)
Npcf_EventExposure_Notify	This service operation is used by the PCF to report UE related policy control event(s) to the NF service consumer which has subscribed to the event report service.	PCF

4.2.2 Npcf_EventExposure_Subscribe service operation

4.2.2.1 General

This service operation is used by an NF service consumer to subscribe for policy events notifications on a specified context for a group of UE(s) or any UE, or to modify an existing subscription.

The following are the types of events for which a subscription can be made:

- PLMN identifier notification; and
- Change of Access Type.

The following procedures using the Npcf_EventExposure_Subscribe service operation are supported:

- creating a new subscription;
- modifying an existing subscription.

4.2.2.2 Creating a new subscription

Figure 4.2.2.2-1 illustrates the creation of a subscription.

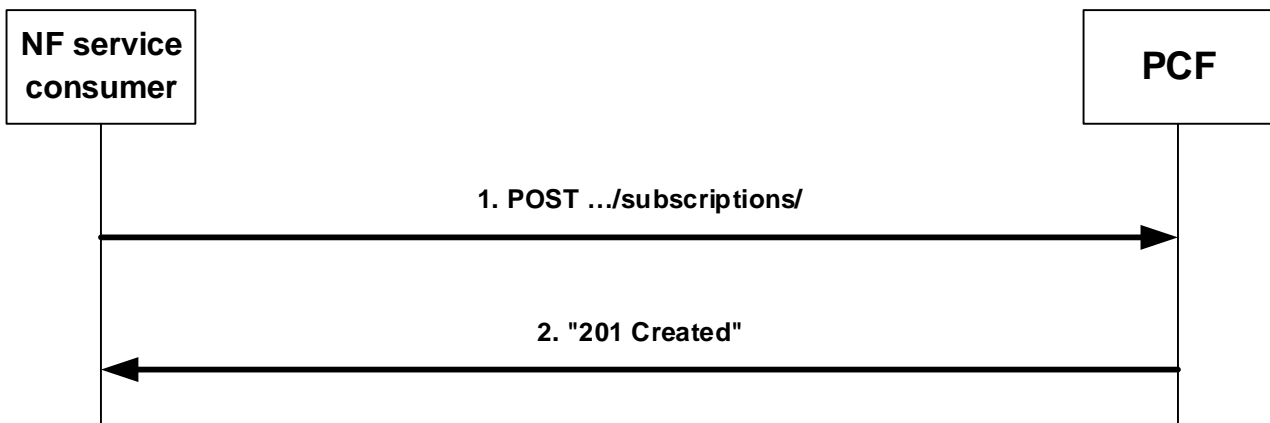


Figure 4.2.2.2-1: Creation of a subscription

To subscribe to event notifications, the NF service consumer shall send an HTTP POST request with: "{apiRoot}/npcf-eventexposure/v1/subscriptions/" as request URI as shown in figure 4.2.2.2-1, step 1, and the "PcEventExposureSubsc" data structure as request body.

The "PcEventExposureSubsc" data structure shall include:

- identification of the policy events to subscribe as "eventSubs" attribute;
- indication of the UEs to which the subscription applies via:
 - a) identification of a group of UE(s) via a "groupId" attribute; or
 - b) identification of any UE by omitting the "groupId" attribute.
- a URI where to receive the requested notifications as "notifUri" attribute; and
- a Notification Correlation Identifier assigned by the NF service consumer for the requested notifications as "notifId" attribute.

The "PcEventExposureSubsc" data structure also may include:

- description of the event reporting information as "eventsRepInfo", which may include:
 - a) event notification method (periodic, one time, on event detection) as "notifMethod" attribute;
 - b) Maximum Number of Reports as "maxReportNbr" attribute;
 - c) Monitoring Duration as "monDur" attribute;
 - d) repetition period for periodic reporting as "repPeriod" attribute;
 - e) immediate reporting indication as "immRep" attribute;
 - f) sampling ratio as "sampRatio" attribute; and/or
 - g) group reporting guard time as "grpRepTime" attribute.
- if the supported feature "ExtendedSessionInformation" is supported, to filter the AF sessions for which the policy event report shall occur, the identification of the services one or more AF sessions may belong to as "filterServices" attribute, which may include per service identification:
 - a) a list of ethernet flows in the "servEthFlows" attribute; or
 - b) a list of IP flows in the "servIpFlows" attribute; and/or
 - c) an AF application identifier in the "afAppId" attribute.
- to filter the DNNs for which the policy event report shall occur, the identification of the DNNs in the "filterDnns" attribute; and

- to filter the S-NSSAIs for which the policy event report shall occur, the identification of the S-NSSAIs in the "filterSnsais" attribute.

If the PCF cannot successfully fulfil the received HTTP POST request due to an internal PCF error or an error in the HTTP POST request, the PCF shall send an HTTP error response as specified in subclause 5.7.

Upon successful reception of the HTTP POST request with "{apiRoot}/npcf-eventexposure/v1/subscriptions/" as request URI and "PcEventExposureSubsc" data structure as request body, the PCF shall create a new "Individual Policy Events Subscription" resource, store the subscription and send a HTTP "201 Created" response as shown in figure 4.2.2.2-1, step 2. The PCF shall include in the "201 Created" response:

- a Location header field; and
- an "PcEventExposureSubsc" data type in the payload body.

The Location header field shall contain the URI of the created individual application session context resource i.e. "{apiRoot}/npcf-eventexposure/v1/subscriptions/{subscriptionId}".

The "PcEventExposureSubsc" data type payload body shall contain the representation of the created "Individual Policy Events Subscription".

When the "monDur" attribute is included in the response, it represents a server selected expiry time that is equal or less than a possible expiry time in the request.

When the "immRep" attribute is included in the subscription and the subscribed policy control events are available, the PCF shall immediately notify the NF service consumer using the Npcf_EventExposure_Notify service operation, as described in subclause 4.2.4.2.

When the sampling ratio as the "sampRatio" attribute is included in the subscription, the PCF shall select a random subset of UEs among the target UEs according to the sampling ratio and only report the event(s) related to the selected subset of UEs.

When the group reporting guard time as the "grpRepTime" attribute is included in the subscription, the PCF shall accumulate all the event reports for the target UEs until the group reporting guard time expires. Then the PCF shall notify the NF service consumer using the Npcf_EventExposure_Notify service operation, as described in subclause 4.2.4.2.

4.2.2.3 Modifying an existing subscription

Figure 4.2.2.3-1 illustrates the modification of an existing subscription.

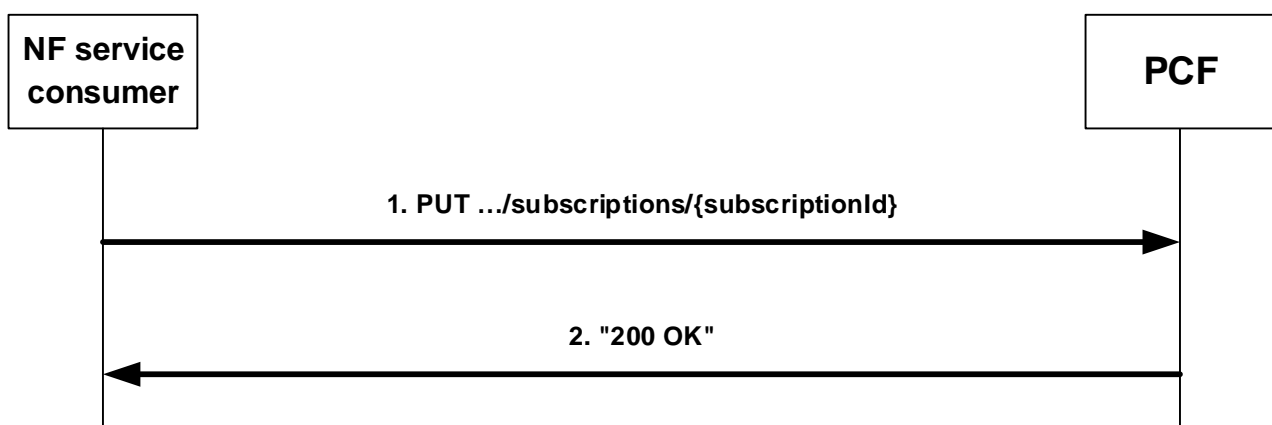


Figure 4.2.2.3-1: Modification of an existing subscription

To modify an existing subscription to event notifications, the NF service consumer shall send an HTTP PUT request with: "{apiRoot}/npcf-eventexposure/v1/subscriptions/{subscriptionId}" as request URI, as shown in figure 4.2.2.3-1, step 1, where "{subscriptionId}" is the subscription correlation ID of the existing subscription. The "PcEventExposureSubsc" data structure is included as request body as described in subclause 4.2.2.2.

NOTE 1: An alternate NF service consumer than the one that requested the generation of the subscription resource can send the PUT.

NOTE 2: The "notifUri" attribute within the PcEventExposureSubsc data structure can be modified to request that subsequent notifications are sent to a new NF service consumer.

If the PCF cannot successfully fulfil the received HTTP PUT request due to an internal PCF error or an error in the HTTP PUT request, the PCF shall send an HTTP error response or, if the feature "ES3XX" is supported, an HTTP redirect response as specified in subclause 5.7.

Upon successful reception of an HTTP PUT request with: "{apiRoot}/npcf-eventexposure/v1/subscriptions/{subscriptionId}" as request URI and "PcEventExposureSubsc" data structure as request body, the PCF shall store the subscription and send an HTTP "200 OK" response with the "PcEventExposureSubsc" data structure as response body, as shown in figure 4.2.2.3-1, step 2.

The "PcEventExposureSubsc" data structure payload body shall contain the representation of the modified "Individual Policy Events Subscription".

When the "monDur" attribute is included in the response, it represents a NF service producer selected expiry time that is equal or less than a possible expiry time received in the request.

When the "immRep" attribute is included in the updated subscription and the subscribed policy control events are available, the PCF shall immediately notify the NF service consumer using the Npcf_EventExposure_Notify service operation, as described in subclause 4.2.4.2.

When the sampling ratio as the "sampRatio" attribute is included in the subscription, the PCF shall select a random subset of UEs among the target UEs according to the sampling ratio and only report the event(s) related to the selected subset of UEs.

When the group reporting guard time as the "grpRepTime" attribute is included in the subscription, the PCF shall accumulate all the event reports for the target UEs until the group reporting guard time expires. Then the PCF shall notify the NF service consumer using the Npcf_EventExposure_Notify service operation, as described in subclause 4.2.4.2.

4.2.3 Npcf_EventExposure_UnSubscribe service operation

4.2.3.1 General

This service operation is used by an NF service consumer to unsubscribe from event notifications.

The following procedure using the Npcf_EventExposure_UnSubscribe service operation is supported:

- unsubscription from event notifications.

4.2.3.2 Unsubscription from event notifications

Figure 4.2.3.2-1 illustrates the unsubscription from event notifications.

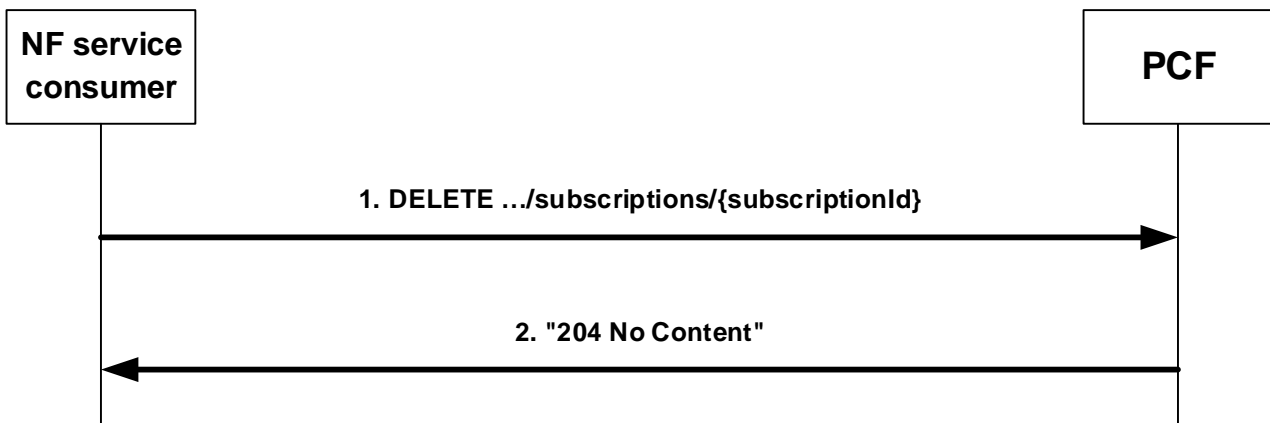


Figure 4.2.3.2-1: Unsubscription from event notifications

To unsubscribe from event notifications, the NF service consumer shall send an HTTP DELETE request with: "{apiRoot}/npcf-eventexposure/v1/subscriptions/{subscriptionId}" as request URI, as shown in figure 4.2.3.2-1, step 1, where "{subscriptionId}" is the subscription correlation identifier of the existing resource subscription that is to be deleted.

If the PCF cannot successfully fulfil the received HTTP DELETE request due to an internal PCF error or due to an error in the HTTP DELETE request, the PCF shall send the HTTP error response or, if the feature "ES3XX" is supported, an HTTP redirect response as specified in subclause 5.7.

Upon successful reception of the HTTP DELETE request with: "{apiRoot}/npcf-eventexposure/v1/subscriptions/{subscriptionId}" as request URI, the PCF shall remove the corresponding subscription and send an HTTP "204 No Content" response as shown in figure 4.2.3.2-1, step 2.

4.2.4 Npcf_EventExposure_Notify service operation

4.2.4.1 General

The Npcf_EventExposure_Notify service operation enables the PCF to notify the NF service consumers that the previously subscribed policy control event occurred.

The following procedure using the Npcf_EventExposure_Notify service operation is supported:

- notification about subscribed events.

4.2.4.2 Notification about subscribed events

Figure 4.2.4.2-1 illustrates the notification about subscribed events.

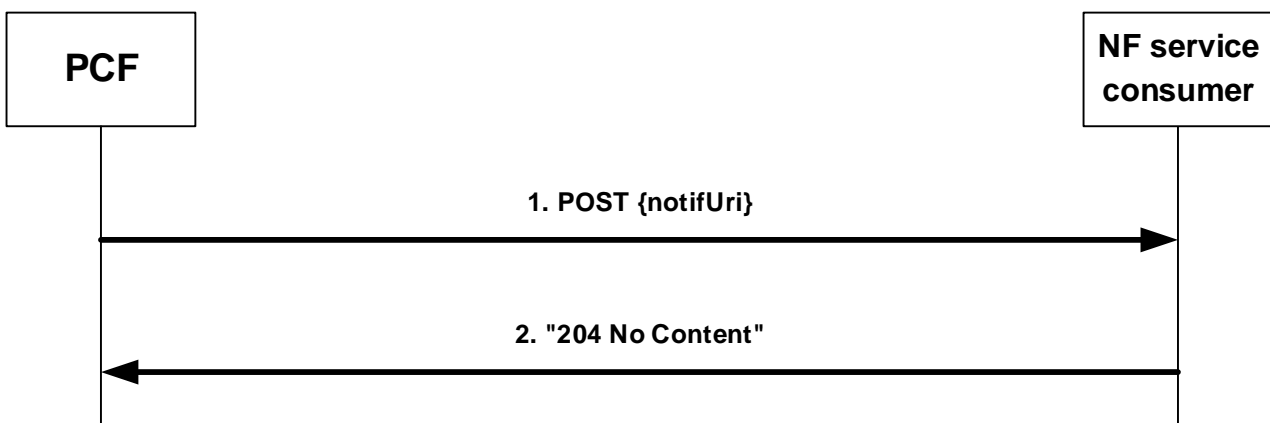


Figure 4.2.4.2-1: Notification about subscribed events

If the PCF observes policy control related event(s) for which an NF service consumer has subscribed, the PCF shall send an HTTP POST request as shown in figure 4.2.4.2-1, step 1, with the "{notifUri}" as request URI containing the value previously provided by the NF service consumer within the corresponding subscription, and the "PcEventExposureNotif" data structure.

The "PcEventExposureNotif" data structure shall include:

- The notification correlation ID provided by the NF service consumer during the subscription as "notifId" attribute; and
- information about the observed event(s) within the "eventNotifs" attribute that shall contain for each observed event an "PcEventNotification" data structure that shall include:
 1. the Policy Control event as "event" attribute;
 2. for an access type change:
 - a) new access type as "accType" attribute;
 - b) the new RAT type as "ratType" attribute, if applicable for the notified access type; and
 - c) if the "ATSSS" feature is supported:
 - i. if it is the first access type report for a PDU session, and both, 3GPP and non-3GPP access information is available, the "addAccessInfo" attribute. The "addAccessInfo" attribute contains the additional access type information, where the access type is encoded in the "accessType" attribute, and the RAT type is encoded in the "ratType" attribute when applicable for the notified access type;
 - ii. if it is a subsequent access type change report:
 - if a new access type is added to the MA PDU session, the "addAccessInfo" attribute with the added access type encoded in the "accessType" attribute, and the RAT type encoded in the "ratType" attribute when applicable for the notified access type;
 - if an access type is released in the MA PDU session, the "relAccessInfo" attribute with the released access type encoded in the "accessType" attribute, and the RAT type encoded in the "ratType" attribute when applicable for the notified access type; and

NOTE: For a MA PDU session, if the "ATSSS" feature is not supported by the AF, the PCF includes the "accessType" attribute and the "ratType" attribute with a currently active combination of access type and RAT type (if applicable for the notified access type). When both 3GPP and non-3GPP accesses are available, the PCF includes the information corresponding to the 3GPP access.

- d) for EPC interworking scenarios, the ePDG address as "anGwAddr" attribute, if applicable for the notified access type;
3. for a PLMN change:
 - a) new network identity containing the PLMN Identifier and, if available, the NID in the "plmnId" attribute;
4. the identity of the affected UE in the "supi" attribute and, if available, in the "gpsi" attribute;
5. the time at which the event was observed encoded as "timeStamp" attribute;
6. if available, and if the feature "ExtendedSessionInformation" is supported, information about the PDU session involved in the reported event in the "pduSessInfo" attribute, that shall include:
 - a) the S-NSSAI of the PDU session in the "snssai" attribute;
 - b) the DNN of the PDU session in the "dnn" attribute; and
 - c) the IPv4 address in the "ueIpv4" attribute and/or the IPv6 prefix in the "ueIpv6" attribute, or the Ethernet MAC address in the "ueMac" attribute; andif the IPv4 address is included in the "ueIpv4" attribute, may include the IP domain in the "ipDomain" attribute;

7. if available, and if the feature "ExtendedSessionInformation" is supported, information about the services involved in the reported event in the indicated PDU session in the "repServices" attribute, which may include per identified service:
 - a) a list of Ethernet flows in the "servEthFlows" attribute which contains an impacted Ethernet flow number within the "flowNumber" attribute in each EthernetFlowInfo data structure; or
 - b) a list of IP flows in the "servIpFlows" attribute which contains an impacted IP flow number within the "flowNumber" attribute in each IpFlowInfo data structure; and/or
 - c) an AF application identifier in the "afAppId" attribute.

If the NF service consumer cannot successfully fulfil the received HTTP POST request due to an internal error or an error in the HTTP POST request, the NF service consumer shall send an HTTP error response or, if the feature "ES3XX" is supported, an HTTP redirect response as specified in subclause 5.7.

Upon successful reception of the HTTP POST request with "{notifUri}" as request URI and a "PcEventExposureNotif" data structure as request body, the NF service consumer shall send a "204 No Content" HTTP response, as shown in figure 4.2.4.2-1, step 2, for a successful processing.

5 Npcf_EventExposure Service API

5.1 Introduction

The Npcf_EventExposure Service shall use the Npcf_EventExposure API.

The API URI of the Npcf_EventExposure API shall be:

{apiRoot}/<apiName>/<apiVersion>/

The request URIs used in HTTP requests from the NF service consumer towards the PCF shall have the Resource URI structure defined in subclause 4.4.1 of 3GPP TS 29.501 [6], i.e.:

{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [6].
- The <apiName> shall be "npcf-eventexposure".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in subclause 5.3.

5.2 Usage of HTTP

5.2.1 General

HTTP/2, IETF RFC 7540 [16], shall be used as specified in subclause 5.2 of 3GPP TS 29.500 [5].

HTTP/2 shall be transported as specified in subclause 5.3 of 3GPP TS 29.500 [5].

The OpenAPI [7] specification of HTTP messages and content bodies for the Npcf_EventExposure is contained in Annex A.

5.2.2 HTTP standard headers

5.2.2.1 General

See subclause 5.2.2 of 3GPP TS 29.500 [5] for the usage of HTTP standard headers.

5.2.2.2 Content type

JSON, IETF RFC 8259 [17], shall be used as content type of the HTTP bodies specified in the present specification as specified in subclause 5.4 of 3GPP TS 29.500 [5]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 7807 [18].

5.2.3 HTTP custom headers

5.2.3.1 General

The mandatory HTTP custom header fields specified in subclause 5.2.3.2 of 3GPP TS 29.500 [5] shall be applicable.

In this Release of the specification, no specific custom headers are defined for the Npcf_EventExposure API.

5.3 Resources

5.3.1 Resource Structure

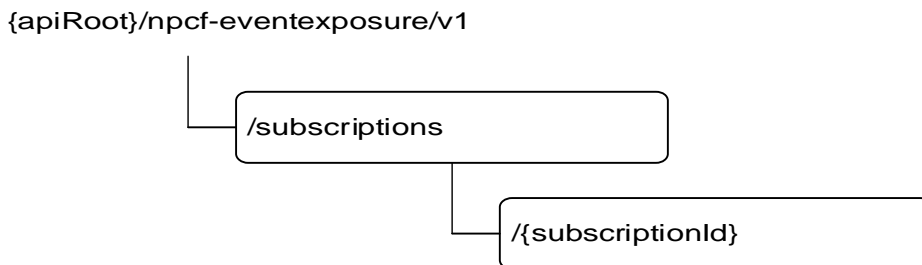


Figure 5.3.1-1: Resource URI structure of the Npcf_EventExposure API

Table 5.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 5.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
Policy Control Events Subscriptions	/subscriptions	POST	Subscription to notifications of policy control events and creation of an Individual Policy Control Events Subscription resource.
Individual Policy Control Events Subscription	/subscriptions/{subscriptionId}	GET	Reads an Individual Policy Control Events Subscription resource.
		PUT	Modifies an Individual Policy Control Events Subscription.
		DELETE	Cancels an individual subscription to notifications of policy control events.

5.3.2 Resource: Policy Control Events Subscriptions (Collection)

5.3.2.1 Description

The Policy Control Events Subscriptions resource represents all subscriptions of the Npcf_EventExposure service at a given PCF.

5.3.2.2 Resource definition

Resource URI: {apiRoot}/npcf-eventexposure/v1/subscriptions/

This resource shall support the resource URI variables defined in table 5.3.2.2-1.

Table 5.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See subclause 5.1

5.3.2.3 Resource Standard Methods

5.3.2.3.1 POST

This method shall support the URI query parameters specified in table 5.3.2.3.1-1.

Table 5.3.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.3.2.3.1-2 and the response data structures and response codes specified in table 5.3.2.3.1-3.

Table 5.3.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
PcEventExposure Subsc	M	1	Contains the information required for the creation of a new individual policy control events subscription.

Table 5.3.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
PcEventExposure Subsc	M	1	201 Created	Contains the representation of the Individual Policy Control Events Subscription resource.
NOTE: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [5] also apply.				

Table 5.3.2.3.1-4: Headers supported by the 201 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/npcf-eventexposure/v1/subscriptions/{subscriptionId}

5.3.2.4 Resource Custom Operations

None.

5.3.3 Resource: Individual Policy Control Events Subscription (Document)

5.3.3.1 Description

The Individual Policy Control Events Subscription resource represents a single subscription of the Npcf_EventExposure service at a given PCF.

5.3.3.2 Resource definition

Resource URI: {apiRoot}/npcf-eventexposure/v1/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.3.3.2-1.

Table 5.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See subclause 5.1
subscriptionId	string	Identify a subscription to the PCF event exposure service.

5.3.3.3 Resource Standard Methods

5.3.3.3.1 GET

This method shall support the URI query parameters specified in table 5.3.3.3.1-1.

Table 5.3.3.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.3.3.3.1-2 and the response data structures and response codes specified in table 5.3.3.3.1-3.

Table 5.3.3.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.3.3.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
PcEventExposureSubsc	M	1	200 OK	A representation of the Individual Policy Control Events Subscription is returned.
ProblemDetails	O	0..1	307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative PCF (service) instance. Applicable if the feature "ES3XX" is supported.
ProblemDetails	O	0..1	308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative PCF (service) instance. Applicable if the feature "ES3XX" is supported.
NOTE: The mandatory HTTP error status codes for the GET method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [5] also apply.				

Table 5.3.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative PCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 5.3.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative PCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

5.3.3.3.2 PUT

This method shall support the URI query parameters specified in table 5.3.3.3.2-1.

Table 5.3.3.3.2-1: URI query parameters supported by the PUT method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.3.3.3.2-2 and the response data structures and response codes specified in table 5.3.3.3.2-3.

Table 5.3.3.3.2-2: Data structures supported by the PUT Request Body on this resource

Data type	P	Cardinality	Description
PcEventExposureSubsc	M	1	Modifies the existing Individual Policy Control Events Subscription resource.

Table 5.3.3.3.2-3: Data structures supported by the PUT Response Body on this resource

Data type	P	Cardinality	Response codes	Description
PcEventExposureSubsc	M	1	200 OK	Successful case: The Individual Policy Control Events Subscription was modified and a representation is returned.
ProblemDetails	O	0..1	307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative PCF (service) instance. Applicable if the feature "ES3XX" is supported.
ProblemDetails	O	0..1	308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative PCF (service) instance. Applicable if the feature "ES3XX" is supported.
NOTE: The mandatory HTTP error status codes for the PUT method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [5] also apply.				

Table 5.3.3.3.2-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative PCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 5.3.3.3.2-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative PCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

5.3.3.3.3 DELETE

This method shall support the URI query parameters specified in table 5.3.3.3.3-1.

Table 5.3.3.3.3-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.3.3.3.3-2 and the response data structures and response codes specified in table 5.3.3.3.3-3.

Table 5.3.3.3.3-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.3.3.3.3-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case: The Individual Policy Control Events Subscription resource matching the subscriptionId was deleted.
ProblemDetails	O	0..1	307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative PCF (service) instance. Applicable if the feature "ES3XX" is supported.
ProblemDetails	O	0..1	308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative PCF (service) instance. Applicable if the feature "ES3XX" is supported.
NOTE: The mandatory HTTP error status code for the DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [5] also apply.				

Table 5.3.3.3.3-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative PCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

Table 5.3.3.3.3-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative PCF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the request is redirected

5.3.3.4 Resource Custom Operations

None.

5.4 Custom Operations without associated resources

None.

5.5 Notifications

5.5.1 General

Notifications shall comply with subclause 6.2 of 3GPP TS 29.500 [5] and subclause 4.6.2.3 of 3GPP TS 29.501 [6].

Table 5.5.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Policy Control Event Notification	{notifUri}	POST	Notification of policy control event reporting.

5.5.2 Policy Control Event Notification

5.5.2.1 Description

The Policy Control Event Notification is used by the PCF to report one or several observed policy control events to the NF service consumer that has subscribed to such notifications via the Individual Policy Control Events Subscription resource.

5.5.2.2 Target URI

The Callback URI "{notifUri}" shall be used with the callback URI variables defined in table 5.5.2.2-1.

Table 5.5.2.2-1: Callback URI variables

Name	Data type	Definition
notifUri	Uri	The Notification Uri as assigned by the NF service consumer during the subscription service operation and described within the PcEventExposureSubsc data type (see table 5.6.2.2-1).

5.5.2.3 Standard Methods

5.5.2.3.1 POST

This method shall support the URI query parameters specified in table 5.5.2.3.1-1.

Table 5.5.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.5.2.3.1-2 and the response data structures and response codes specified in table 5.5.2.3.1-3.

Table 5.5.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
PcEventExposureNotif	M	1	Provides Information about observed policy control events

Table 5.5.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The receipt of the Notification is acknowledged.
ProblemDetails	O	0..1	307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF consumer (service) instance where the notification should be sent. Applicable if the feature "ES3XX" is supported.
ProblemDetails	O	0..1	308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF consumer (service) instance where the notification should be sent. Applicable if the feature "ES3XX" is supported.
NOTE: In addition, the HTTP status codes which are specified as mandatory in table 5.2.7.1-1 of 3GPP TS 29.500 [5] for the POST method shall also apply.				

Table 5.5.2.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the notification request is redirected

Table 5.5.2.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance ID towards which the notification request is redirected

5.6 Data Model

5.6.1 General

This subclause specifies the application data model supported by the API.

Table 5.6.1-1 specifies the data types defined for the Npcf_EventExposure service based interface protocol.

Table 5.6.1-1: Npcf_EventExposure specific Data Types

Data type	Section defined	Description	Applicability
EthernetFlowInfo	5.6.2.6	Identification of an UL/DL ethernet flow.	ExtendedSessionInformation
IpFlowInfo	5.6.2.7	Identification of an UL/DL IP flow.	ExtendedSessionInformation
PcEvent	5.6.3.3	Policy Control Events.	
PcEventExposureSubsc	5.6.2.2	Represents an Individual Policy Events Subscription resource.	
PcEventExposureNotif	5.6.2.3	Describes notifications about Policy Control events that occurred in an Individual Policy Events Subscription resource.	
PcEventNotification	5.6.2.8	Represents the information reported for a Policy Control event.	
PduSessionInformation	5.6.2.9	Represents PDU session identification information.	ExtendedSessionInformation
ReportingInformation	5.6.2.4	Represents the type of reporting the subscription requires.	
ServiceIdentification	5.6.2.5	Identification of the service to which the subscription applies.	ExtendedSessionInformation

Table 5.6.1-2 specifies data types re-used by the Npcf_EventExposure service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Npcf_EventExposure service based interface.

Table 5.6.1-2: Npcf_EventExposure re-used Data Types

Data type	Reference	Comments	Applicability
AccessType	3GPP TS 29.571 [14]	Access Type.	
AdditionalAccessInfo	3GPP TS 29.512 [9]	Indicates the combination of additional Access Type and RAT Type for MA PDU session	ATSSS
AfApplId	3GPP TS 29.514 [12]	AF application Identifier.	ExtendedSessionInformation
AnGwAddress	3GPP TS 29.514 [12]	Carries the control plane address of the EPC untrusted non-3GPP access network gateway. (NOTE 1)	
DateTime	3GPP TS 29.571 [14]	Time stamp.	
Dnn	3GPP TS 29.571 [14]	Identifies a DNN.	
DurationSec	3GPP TS 29.571 [14]	Seconds of duration.	
EthFlowDescription	3GPP TS 29.514 [12]	Identifies an ethernet flow description. (NOTE 2)	ExtendedSessionInformation
FlowDescription	3GPP TS 29.514 [12]	Identifies an IP flow description.	ExtendedSessionInformation
Gpsi	3GPP TS 29.571 [14]	Generic Public Subscription Identifier.	
GroupId	3GPP TS 29.571 [14]	Identifies a group of UEs.	
MacAddr48	3GPP TS 29.571 [14]	Mac Address of the UE.	ExtendedSessionInformation
NotificationMethod	3GPP TS 29.508 [15]	Represents the Notification Method.	
PlmnIdNid	3GPP TS 29.571 [14]	Identifies the network: the PLMN Identifier and, for an SNPN, also the NID.	
RatType	3GPP TS 29.571 [14]	RAT Type.	
SamplingRatio	3GPP TS 29.571 [14]	Sampling Ratio.	
Snsai	3GPP TS 29.571 [14]	Identifies a S-NSSAI	
Supi	3GPP TS 29.571 [14]	Identifies the SUPI of the UE.	
SupportedFeatures	3GPP TS 29.571 [14]	Used to negotiate the applicability of the optional features defined in subclause 5.8.	
UInteger	3GPP TS 29.571 [14]	Unsigned integer.	
NOTE 1: "AnGwAddress" data structure is only used to encode the ePDG address and is only applicable to the 5GS and EPC/E-UTRAN interworking scenario as defined in 3GPP TS 29.512 [9], Annex B.			
NOTE 2: In order to support a set of MAC addresses with a specific range in the traffic filter, feature MacAddressRange as specified in clause 5.8 shall be supported.			

5.6.2 Structured data types

5.6.2.1 Introduction

This subclause defines the structures to be used in resource representations.

5.6.2.2 Type PcEventExposureSubsc

Table 5.6.2.2-1: Definition of type PcEventExposureSubsc

Attribute name	Data type	P	Cardinality	Description	Applicability
eventSubs	array(PcEvent)	M	1..N	Subscribed Policy Control events.	
eventsRepInfo	ReportingInformation	O	0..1	Represents the reporting requirements of the subscription.	
groupId	GroupId	C	0..1	Represents an internal group identifier and identifies a group of UEs. It shall be present when the subscription is targeting a Group of UE(s).	
filterDnns	array(Dnn)	O	1..N	Represents the DNNs for which the policy event report shall apply. Each DNN is a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only. If omitted it represents any DNN.	
filterSnssais	array(Snssai)	O	1..N	Represents the S-NSSAIs for which the policy event report shall apply. If omitted it represents any S-NSSAI.	
filterServices	array(ServiceIdentification)	O	1..N	Represents the services for which the policy event report shall apply. If omitted, the policy event report shall apply for all the active services.	ExtendedSessionInformation
notifUri	Uri	M	1	Notification URI for Policy Control event reporting.	
notifId	string	M	1	Notification Correlation ID assigned by the NF service consumer.	
suppFeat	SupportedFeatures	C	0..1	This IE represents a list of Supported features used as described in subclause 5.8. Shall be present in the HTTP POST request/response. (NOTE)	
NOTE: In the HTTP request, it represents the set of features supported by the NF service consumer. In the HTTP response, it represents the set of features supported by both the NF service consumer and the PCF.					

5.6.2.3 Type PcEventExposureNotif

Table 5.6.2.3-1: Definition of type PcEventExposureNotif

Attribute name	Data type	P	Cardinality	Description	Applicability
notifId	string	M	1	Notification Correlation ID assigned by the NF service consumer.	
eventNotifs	array(PcEventNotification)	M	1..N	Represents the Policy Control Events to be reported according to the subscription corresponding to the Notification Correlation ID.	

5.6.2.4 Type ReportingInformation

Table 5.6.2.4-1: Definition of type ReportingInformation

Attribute name	Data type	P	Cardinality	Description	Applicability
immRep	boolean	O	0..1	Indication of immediate reporting. If included, when it is set to true it indicates immediate reporting of the subscribed events, if available. Otherwise, reporting will occur when the event is met.	
notifMethod	NotificationMethod	O	0..1	Represents the notification method (periodic, one time, on event detection). If "notifMethod" attribute is not supplied, the default value "ON_EVENT_DETECTION" applies.	
maxReportNbr	UInteger	O	0..1	Represents the maximum number of reports, after which the subscription ceases to exist (i.e., the reporting ends). It may be present for the "PERIODIC" and on "ON_EVENT_DETECTION" notification methods. If omitted, there is no limit.	
monDur	DateTime	C	0..1	Represents the time at which the subscription ceases to exist (i.e. the subscription becomes invalid and the reporting ends). If omitted, there is no time limit. If present in the subscription request, it shall be present in the subscription response.	
repPeriod	DurationSec	O	0..1	Indicates the time interval between successive event notifications. It is supplied for notification method "PERIODIC".	
sampRatio	SamplingRatio	O	0..1	Indicates the ratio of the random subset to target UEs, event reports only relates to the subset.	
grpRepTime	DurationSec	O	0..1	Indicates the time during which the the event reports detected for the concerned UEs are aggregated in a group, in order to be reported together to the NF service consumer.	

5.6.2.5 Type ServiceIdentification

Table 5.6.2.5-1: Definition of type ServiceIdentification

Attribute name	Data type	P	Cardinality	Description	Applicability
servEthFlows	array(EthernetFlowInfo)	C	1..N	Ethernet flows of a service.	ExtendedSessionInformation
servIpFlows	array(IpFlowInfo)	C	1..N	IP flows of a service	ExtendedSessionInformation
afAppId	AfAppId	O	0..1	Contains an AF application identifier.	ExtendedSessionInformation
NOTE:	At least one of the "servEthFlows", "servIpFlows" or "afAppId" attributes shall be present. The "servEthFlows" attribute and the "servIpFlows" attribute shall not be both present at the same time.				

5.6.2.6 Type EthernetFlowInfo

Table 5.6.2.6-1: Definition of type EthernetFlowInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
ethFlows	array(EthFlowDescription)	C	1..2	Contains the flow description for the Uplink and/or Downlink Ethernet flows. It shall be present in the subscription request.	ExtendedSessionInformation
flowNumber	integer	M	1	Identifies the ordinal number of the Ethernet flow.	ExtendedSessionInformation

5.6.2.7 Type IpFlowInfo

Table 5.6.2.7-1: Definition of type IpFlowInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
ipFlows	array(FlowDescription)	C	1..2	Contains the flow description for the Uplink and/or Downlink IP flows. It shall be present in the subscription request	ExtendedSessionInformation
flowNumber	integer	M	1	Identifies the ordinal number of the IP flow.	ExtendedSessionInformation

5.6.2.8 Type PcEventNotification

Table 5.6.2.8-1: Definition of type PcEventNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
event	PcEvent	M	1..N	Reported Policy Control event.	
accType	AccessType	C	0..1	Access Type. It shall be included when the reported PcEvent is "AC_TY_CH".	
addAccessInfo	AdditionalAccessInfo	O	0..1	Indicates the additional combination of Access Type and RAT Type available for MA PDU session. It may be present when the notified event is "AC_TY_CH" and the PDU session is a Multi-Access PDU session.	ATSSS
relAccessInfo	AdditionalAccessInfo	O	0..1	Indicates the release of a combination of Access Type and RAT Type available for MA PDU session. It may be present when the notified event is "AC_TY_CH" and the PDU session is a Multi-Access PDU session.	ATSSS
anGwAddr	AnGwAddress	O	0..1	ePDG address. It shall be included if applicable when the reported PcEvent is "AC_TY_CH".	
ratType	RatType	O	0..1	RAT Type. It shall be included if applicable when the reported PcEvent is "AC_TY_CH".	
plmnId	PlmnIdNid	C	0..1	PLMN Identifier and, for an SNPN, also the NID. It shall be included when the reported PcEvent is "PLMN_CH".	
supi	Supi	C	0..1	SUPI of the UE. It shall be present if available.	
gpsi	Gpsi	O	0..1	Gpsi shall contain either an External Id or an MSISDN.	
timeStamp	DateTime	M	1	Time at which the event is observed.	
pduSessInfo	PduSessionInformation	O	0..1	Represents PDU session information related to the observed event.	ExtendedSessionInformation
repServices	ServiceIdentification	O	0..1	Represents service information related to the observed event.	ExtendedSessionInformation

5.6.2.9 Type PduSessionInformation

Table 5.6.2.9-1: Definition of type PduSessionInformation

Attribute name	Data type	P	Cardinality	Description	Applicability
snssai	Snssai	M	1	S-NSSAI of the PDU session.	ExtendedSessionInformation
dnn	Dnn	M	1..N	Dnn of the PDU session, a full DNN with both the Network Identifier and Operator Identifier, or a DNN with the Network Identifier only.	ExtendedSessionInformation
uelpv4	Ipv4Addr	C	0..1	The IPv4 address of the served UE. (NOTE 1)	ExtendedSessionInformation
uelpv6	Ipv6Prefix	C	0..1	The IPv6 prefix of the served UE. (NOTE 1)	ExtendedSessionInformation
ipDomain	string	O	0..1	Identifies the IP domain. (NOTE 2)	ExtendedSessionInformation
ueMac	MacAddr48	C	0..1	UE MAC address. (NOTE 1)	ExtendedSessionInformation
NOTE 1: Either the served UE IP address (an Ipv4Addr or Ipv6Prefix or both if available) or UE MAC address shall be present.					
NOTE 2: An "ipDomain" attribute, may be provided in combination with a "uelpv4" attribute.					

5.6.3 Simple data types and enumerations

5.6.3.1 Introduction

This subclause defines simple data types and enumerations that can be referenced from data structures defined in the previous subclauses.

5.6.3.2 Simple data types

The simple data types defined in table 5.6.3.2-1 shall be supported.

Table 5.6.3.2-1: Simple data types

Type Name	Type Definition	Description	Applicability

5.6.3.3 Enumeration: PcEvent

The enumeration PcEvent represents the policy control events that can be subscribed. It shall comply with the provisions defined in table 5.6.3.3-1.

Table 5.6.3.3-1: Enumeration PcEvent

Enumeration value	Description	Applicability
AC_TY_CH	Access Type Change	
PLMN_CH	PLMN Change	

5.7 Error handling

5.7.1 General

HTTP error handling shall be supported as specified in subclause 5.2.4 of 3GPP TS 29.500 [5].

For the Npcf_EventExposure API, HTTP error responses shall be supported as specified in subclause 4.8 of 3GPP TS 29.501 [6].

Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [5] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [5].

Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [5] for HTTP redirections shall be supported if the feature "ES3XX" is supported.

In addition, the requirements in the following subclauses are applicable for the Npcf_EventExposure API.

5.7.2 Protocol Errors

In this Release of the specification, there are no service specific protocol errors applicable for the Npcf_EventExposure API.

5.7.3 Application Errors

The application errors defined for the Npcf_EventExposure service are listed in table 5.7.3-1.

Table 5.7.3-1: Application errors

Application Error	HTTP status code	Description

5.8 Feature negotiation

The optional features in table 5.8-1 are defined for the Npcf_EventExposure API. They shall be negotiated using the extensibility mechanism defined in subclause 6.6 of 3GPP TS 29.500 [5].

Table 5.8-1: Supported Features

Feature number	Feature Name	Description
1	ExtendedSessionInformation	Indicates the support of additional session information in the subscription and report of policy control event.
2	MacAddressRange	Indicates the support of a set of MAC addresses with a specific range in the traffic filter.
3	ATSSS	Indicates the support of the report of the multiple access types of a MA PDU session.
4	ES3XX	Extended Support for 3xx redirections. This feature indicates the support of redirection for any service operation, according to Stateless NF procedures as specified in subclauses 6.5.3.2 and 6.5.3.3 of 3GPP TS 29.500 [5] and according to HTTP redirection principles for indirect communication, as specified in subclause 6.10.9 of 3GPP TS 29.500 [5].

5.9 Security

As indicated in 3GPP TS 33.501 [19] and 3GPP TS 29.500 [5], the access to the Npcf_EventExposure API, based on local configuration, may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [20]), using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [21]) plays the role of the authorization server.

If OAuth2 authorization is used, an NF Service Consumer, prior to consuming services offered by the Nnrf_NFManagement API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [21], subclause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF where the NF Service Consumer invoked the discovery of the Npcf_EventExposure service.

The Npcf_EventExposure API defines a single scope "npcf-eventexposure" for the entire service, and it does not define any additional scopes at resource or operation level.

Annex A (normative): OpenAPI specification

A.1 General

The present Annex contains an OpenAPI [7] specification of HTTP messages and content bodies used by the Npcf_EventExposure API.

This Annex shall take precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API.

NOTE: The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification file contained in this 3GPP Technical Specification are available on a Git-based repository that uses the GitLab software version control system (see clause 5B of the 3GPP TR 21.900 [22] and subclause 5.3.1 of the 3GPP TS 29.501 [6] for further information).

A.2 Npcf_EventExposure API

```
openapi: 3.0.0
info:
  version: 1.1.1
  title: Npcf_EventExposure
  description: |
    PCF Event Exposure Service.
    © 2020, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: 3GPP TS 29.523 V16.4.0; 5G System; Policy Control Event Exposure Service; Stage 3.
  url: http://www.3gpp.org/ftp/Specs/archive/29_series/29.523/

servers:
- url: '{apiRoot}/npcf-eventexposure/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in subclause 4.4 of 3GPP TS 29.501

security:
- {}
- oAuth2ClientCredentials:
  - npcf-eventexposure

paths:
  /subscriptions:
    post:
      summary: Creates a new Individual Policy Control Events Subscription resource
      operationId: PostPcEventExposureSubsc
      tags:
        - Policy Control Events Subscription (Collection)
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/PcEventExposureSubsc'
      responses:
        '201':
          description: Success
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/PcEventExposureSubsc'
      headers:
```

```

    Location:
      description: 'Contains the URI of the created individual policy control events
subscription resource, according to the structure: {apiRoot}/npcf-
eventexposure/v1/subscriptions/{subscriptionId}'
      required: true
      schema:
        type: string
'400':
  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
callbacks:
  PcEventNotification:
    '{$request.body#/notifUri}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/PcEventExposureNotif'
        responses:
          '204':
            description: No Content, Notification was succesfull
          '307':
            description: Temporary Redirect
            content:
              application/problem+json:
                schema:
                  $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
            headers:
              Location:
                required: true
                description: 'A URI pointing to the endpoint of an alternative NF consumer
(service) instance towards which the notification should be redirected.'
                schema:
                  type: string
              3gpp-Sbi-Target-Nf-Id:
                description: 'Identifier of the target NF (service) instance ID towards which
the notification request is redirected'
                schema:
                  type: string
          '308':
            description: Permanent Redirect
            content:
              application/problem+json:
                schema:
                  $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
            headers:
              Location:
                required: true
                description: 'A URI pointing to the endpoint of an alternative NF consumer
(service) instance towards which the notification should be redirected.'
                schema:
                  type: string
              3gpp-Sbi-Target-Nf-Id:
                description: 'Identifier of the target NF (service) instance ID towards which
the notification request is redirected'
                schema:
                  type: string

```

```

    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/subscriptions/{subscriptionId}:
  get:
    summary: "Reads an existing Individual Policy Control Events Subscription"
    operationId: GetPcEventExposureSubsc
    tags:
      - Individual Policy Control Events Subscription (Document)
    parameters:
      - name: subscriptionId
        in: path
        description: Policy Control Event Subscription ID
        required: true
        schema:
          type: string
    responses:
      '200':
        description: OK. Resource representation is returned
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/PcEventExposureSubsc'
      '307':
        description: Temporary Redirect
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
        headers:
          Location:
            description: 'An alternative URI of the resource located on an alternative PCF
(service) instance.'
            required: true
            schema:
              type: string
          3gpp-Sbi-Target-Nf-Id:
            description: 'Identifier of the target NF (service) instance ID towards which the
request is redirected'
            schema:
              type: string
      '308':
        description: Permanent Redirect
        content:
          application/problem+json:
            schema:
              $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
        headers:
          Location:
            description: 'An alternative URI of the resource located on an alternative PCF
(service) instance.'
            required: true
            schema:
              type: string
          3gpp-Sbi-Target-Nf-Id:
            description: 'Identifier of the target NF (service) instance ID towards which the
request is redirected'
            schema:
              type: string

```

```

'400':
  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'406':
  $ref: 'TS29571_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
put:
  summary: "Modifies an existing Individual Policy Control Events Subscription "
  operationId: PutPcEventExposureSubsc
  tags:
    - Individual Policy Control Events Subscription (Document)
  requestBody:
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/PcEventExposureSubsc'
  parameters:
    - name: subscriptionId
      in: path
      description: Policy Control Event Subscription ID
      required: true
      schema:
        type: string
  responses:
    '200':
      description: OK. Resource was succesfully modified and representation is returned
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/PcEventExposureSubsc'
    '204':
      description: No Content. Resource was succesfully modified
    '307':
      description: Temporary Redirect
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
      headers:
        Location:
          description: 'An alternative URI of the resource located on an alternative PCF
(service) instance.'
          required: true
          schema:
            type: string
        3gpp-Sbi-Target-Nf-Id:
          description: 'Identifier of the target NF (service) instance ID towards which the
request is redirected'
          schema:
            type: string
    '308':
      description: Permanent Redirect
      content:
        application/problem+json:
          schema:
            $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
      headers:
        Location:
          description: 'An alternative URI of the resource located on an alternative PCF
(service) instance.'
          required: true
          schema:
            type: string
        3gpp-Sbi-Target-Nf-Id:

```

```

        description: 'Identifier of the target NF (service) instance ID towards which the
request is redirected'
        schema:
            type: string
    '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
        $ref: 'TS29571_CommonData.yaml#/components/responses/default'
delete:
    summary: "Cancels an existing Individual Policy Control Events Subscription "
    operationId: DeletePcEventExposureSubsc
    tags:
        - Individual Policy Control Events Subscription (Document)
    parameters:
        - name: subscriptionId
          in: path
          description: Policy Control Event Subscription ID
          required: true
          schema:
              type: string
    responses:
        '204':
            description: No Content. Resource was succesfully deleted
        '307':
            description: Temporary Redirect
            content:
                application/problem+json:
                    schema:
                        $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
            headers:
                Location:
                    description: 'An alternative URI of the resource located on an alternative PCF
(service) instance.'
                    required: true
                    schema:
                        type: string
                3gpp-Sbi-Target-Nf-Id:
                    description: 'Identifier of the target NF (service) instance ID towards which the
request is redirected'
                    schema:
                        type: string
        '308':
            description: Permanent Redirect
            content:
                application/problem+json:
                    schema:
                        $ref: 'TS29571_CommonData.yaml#/components/schemas/ProblemDetails'
            headers:
                Location:
                    description: 'An alternative URI of the resource located on an alternative PCF
(service) instance.'
                    required: true
                    schema:
                        type: string
                3gpp-Sbi-Target-Nf-Id:
                    description: 'Identifier of the target NF (service) instance ID towards which the
request is redirected'
                    schema:
                        type: string
    '400':

```

```

    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'

```

```

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            npcfc-eventexposure: Access to the Npcf_EventExposure API.

```

schemas:

```

PcEventExposureNotif:
  type: object
  properties:
    notifId:
      type: string
    eventNotifs:
      type: array
      items:
        $ref: '#/components/schemas/PcEventNotification'
      minItems: 1
  required:
    - notifId
    - eventNotifs

```

```

PcEventExposureSubsc:
  type: object
  properties:
    eventSubs:
      type: array
      items:
        $ref: '#/components/schemas/PcEvent'
      minItems: 1
    eventsRepInfo:
      $ref: '#/components/schemas/ReportingInformation'
    groupId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/GroupId'
    filterDnns:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
      minItems: 1
    filterSnssais:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
      minItems: 1
    filterServices:
      type: array
      items:
        $ref: '#/components/schemas/ServiceIdentification'
      minItems: 1
    notifUri:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    notifId:
      type: string
    suppFeat:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
  required:

```

- eventSubs
- notifId
- notifUri

ReportingInformation:

```

type: object
properties:
  immRep:
    type: boolean
  notifMethod:
    $ref: 'TS29508_Nsmf_EventExposure.yaml#/components/schemas/NotificationMethod'
  maxReportNbr:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/UInteger'
  monDur:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
  repPeriod:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'
  sampRatio:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/SamplingRatio'
  grpRepTime:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DurationSec'

```

ServiceIdentification:

```

type: object
properties:
  servEthFlows:
    type: array
    items:
      $ref: '#/components/schemas/EthernetFlowInfo'
    minItems: 1
  servIpFlows:
    type: array
    items:
      $ref: '#/components/schemas/IpFlowInfo'
    minItems: 1
  afAppId:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/AfAppId'
# All conditions in allOf must be met
allOf:
# First condition is that servEthFlows and servIpFlows are mutually exclusive
- not:
  required: [servEthFlows, servIpFlows]
# Second condition is that at least one the servEthFlows, servIpFlows and afAppId shall be
present
- anyOf:
  - required: [servEthFlows]
  - required: [servIpFlows]
  - required: [afAppId]

```

EthernetFlowInfo:

```

type: object
properties:
  ethFlows:
    type: array
    items:
      $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/EthFlowDescription'
    minItems: 1
    maxItems: 2
  flowNumber:
    type: integer
required:
- flowNumber

```

IpFlowInfo:

```

type: object
properties:
  ipFlows:
    type: array
    items:
      $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/FlowDescription'
    minItems: 1
    maxItems: 2
  flowNumber:
    type: integer
required:
- flowNumber

```

PcEventNotification:


```

type: object
properties:
  event:
    $ref: '#/components/schemas/PcEvent'
  accType:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/AccessType'
  addAccessInfo:
    $ref: 'TS29512_Npcf_SMPolicyControl.yaml#/components/schemas/AdditionalAccessInfo'
  relAccessInfo:
    $ref: 'TS29512_Npcf_SMPolicyControl.yaml#/components/schemas/AdditionalAccessInfo'
  anGwAddr:
    $ref: 'TS29514_Npcf_PolicyAuthorization.yaml#/components/schemas/AnGwAddress'
  ratType:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/RatType'
  plmnId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/PlmnIdNid'
  supi:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
  gpsi:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Gpsi'
  timeStamp:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
  pduSessionInfo:
    $ref: '#/components/schemas/PduSessionInformation'
  repServices:
    $ref: '#/components/schemas/ServiceIdentification'
required:
  - event
  - timeStamp

```

PduSessionInformation:

```

type: object
properties:
  snssai:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
  dnn:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
  ueIpv4:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv4Addr'
  ueIpv6:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Ipv6Prefix'
  ipDomain:
    type: string
  ueMac:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/MacAddr48'
required:
  - snssai
  - dnn
oneOf:
  - required: [ueMac]
  - anyOf:
    - required: [ueIpv4]
    - required: [ueIpv6]

```

Simple data types and Enumerations

```

PcEvent:
  anyOf:
  - type: string
  enum:
    - AC_TY_CH
    - PLMN_CH
  - type: string

```

Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2018-11						TS skeleton of Policy Event Exposure Service specification	0.0.0
2018-11	CT3#99	C3-187718				API Introduction and Usage of HTTP for new PCF TS	1.0.0
2018-11	CT3#99	C3-187416				Npcf_EventExposure Resources Definition and Error handling	1.0.0
2018-11	CT3#99	C3-187419				Npcf_EventExposure, Policy Control Event Notification	1.0.0
2018-11	CT3#99	C3-187675				Npcf_EventExposure Service Description	1.0.0
2018-11	CT3#99	C3-187717				Npcf_EventExposure Service Operations and Data Structures	1.0.0
2018-11	CT3#99	C3-187734				Npcf_EventExposure, OpenAPI	1.0.0
2018-11	CT3#99	C3-187677				Npcf_EventExposure, Security	1.0.0
2018-12	CT#82	CP-183131				TS sent to plenary for information and approval	1.0.0
2018-12	CT#82	CP-183166				Npcf_EventExposure, OpenAPI	1.1.0
2018-12	CT#82	CP-183251				TS number assigned in the plenary for approval	1.1.0
2018-12	CT#82	CP-183253				TS approved by plenary	15.0.0
2019-03	CP#83	CP-190112	0001	1	F	Handling of IPdomain and UE addresses in Npcf_EventExposure service	15.1.0
2019-03	CT#83	CP-190160	0002	3	F	Correction on Presence conditions for ServiceIdentification data type	15.1.0
2019-03	CT#83	CP-190112	0003	1	F	Handling of UE identities in Npcf_EventExposure service	15.1.0
2019-03	CP#83	CP-190112	0004	-	F	Correction on the handling of access type change	15.1.0
2019-03	CT#83	CP-190112	0005	-	F	Correction of OpenAPI errors	15.1.0
2019-03	CP#83	CP-190161	0006	1	F	OpenAPI Version number updates	15.1.0
2019-06	CT#84	CP-191081	0007	1	F	Report ePDG address	15.2.0
2019-06	CT#84	CP-191081	0008		F	Storage of OpenAPI specification file	15.2.0
2019-06	CT#84	CP-191081	0009	2	F	Correction to the notification procedure	15.2.0
2019-06	CT#84	CP-191081	0010		F	Correction on PCF event exposure service	15.2.0
2019-06	CT#84	CP-191081	0011	2	F	Precedence of OpenAPI file	15.2.0
2019-06	CT#84	CP-191182	0012	2	F	Copyright note in YAML file	15.2.0
2019-06	CT#84	CP-191081	0013	1	F	OpenAPI Version number update	15.2.0
2019-09	CT#85	CP-192156	0014	1	B	Support of a set of MAC addresses in traffic filter	16.0.0
2019-09	CT#85	CP-192157	0015	1	B	Enhancement of event reporting information	16.0.0
2019-09	CT#85	CP-192173	0016		F	OpenAPI version update	16.0.0
2020-03	CT#87e	CP-200207	0018		B	DNN Clarification	16.1.0
2020-06	CT#88e	CP-201252	0019		B	Adding support of NID	16.2.0
2020-06	CT#88e	CP-201229	0020	3	B	Access Type Report for a MA PDU session	16.2.0
2020-06	CT#88e	CP-201244	0021	1	F	Storage of YAML files in ETSI Forge	16.2.0
2020-06	CT#88e	CP-201256	0022	1	F	URI of the Npcf_EventExposure service	16.2.0
2020-06	CT#88e	CP-201223	0024	1	A	suppFeat within PcEventExposureSubsc	16.2.0
2020-06	CT#88e	CP-201244	0025	1	F	Supported headers, Resource Data type	16.2.0
2020-06	CT#88e	CP-201255	0027		F	Update of OpenAPI version and TS version in externalDocs Field	16.2.0
2020-09	CT#89e	CP-202055	0031	1	A	Resource URI for individual subscription	16.3.0
2020-12	CT#90e	CP-203075	0032	2	F	Essential corrections and alignments	16.4.0
2020-12	CT#90e	CP-203139	0034	1	F	Storage of YAML files in ETSI Forge	16.4.0
2020-12	CT#90e	CP-203110	0038	1	F	Correction to support Stateless NFs	16.4.0
2020-12	CT#90e	CP-203152	0040	-	F	Update of OpenAPI version and TS version in externalDocs field	16.4.0

History

Document history		
V16.2.0	August 2020	Publication
V16.3.0	November 2020	Publication
V16.4.0	January 2021	Publication