

# ETSI TS 129 580 V17.0.0 (2022-09)



**5G;  
5G System;  
Multicast/Broadcast Service Function services;  
Stage 3  
(3GPP TS 29.580 version 17.0.0 Release 17)**



---

Reference

DTS/TSGC-0329580vh00

---

Keywords

5G

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our  
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	7
1 Scope .....	9
2 References .....	9
3 Definitions, symbols and abbreviations .....	10
3.1 Definitions .....	10
3.2 Symbols.....	10
3.3 Abbreviations .....	10
4 Overview .....	10
5 Services offered by the MBSF .....	11
5.1 Introduction .....	11
5.2 Nmbsf_MBSUserService Service .....	12
5.2.1 Service Description.....	12
5.2.2 Service Operations.....	12
5.2.2.1 Introduction.....	12
5.2.2.2 Nmbsf_MBSUserService_Create service operation .....	12
5.2.2.2.1 General .....	12
5.2.2.2.2 MBS User Service Creation .....	12
5.2.2.3 Nmbsf_MBSUserService_Retrieve service operation .....	13
5.2.2.3.1 General .....	13
5.2.2.3.2 MBS User Service Retrieval.....	13
5.2.2.4 Nmbsf_MBSUserService_Update service operation .....	14
5.2.2.4.1 General .....	14
5.2.2.4.2 MBS User Service Update.....	14
5.2.2.5 Nmbsf_MBSUserService_Delete service operation .....	15
5.2.2.5.1 General .....	15
5.2.2.5.2 MBS User Service Deletion .....	15
5.3 Nmbsf_MBSUserDataIngestSession Service .....	16
5.3.1 Service Description.....	16
5.3.2 Service Operations.....	16
5.3.2.1 Introduction.....	16
5.3.2.2 Nmbsf_MBSUserDataIngestSession_Create service operation .....	17
5.3.2.2.1 General .....	17
5.3.2.2.2 MBS User Data Ingest Session Creation .....	17
5.3.2.3 Nmbsf_MBSUserDataIngestSession_Retrieve service operation.....	18
5.3.2.3.1 General .....	18
5.3.2.3.2 MBS User Data Ingest Session Retrieval .....	19
5.3.2.4 Nmbsf_MBSUserDataIngestSession_Update service operation.....	19
5.3.2.4.1 General .....	19
5.3.2.4.2 MBS User Data Ingest Session Update .....	19
5.3.2.5 Nmbsf_MBSUserDataIngestSession_Delete service operation .....	21
5.3.2.5.1 General .....	21
5.3.2.5.2 MBS User Data Ingest Session Deletion .....	21
5.3.2.6 Nmbsf_MBSUserDataIngestSession_StatusSubscribe service operation.....	21
5.3.2.6.1 General .....	21
5.3.2.6.2 MBS User Data Ingest Session Status Subscription Creation .....	22
5.3.2.7 Nmbsf_MBSUserDataIngestSession_StatusSubscribeMod service operation .....	22
5.3.2.7.1 General .....	22
5.3.2.7.2 MBS User Data Ingest Session Status Subscription Update .....	23
5.3.2.8 Nmbsf_MBSUserDataIngestSession_StatusUnsubscribe service operation.....	23
5.3.2.8.1 General .....	23

5.3.2.8.2	MBS User Data Ingest Session Status Subscription Deletion .....	23
5.3.2.9	Nmbssf_MBSUserDataIngestSession_StatusNotify service operation .....	24
5.3.2.9.1	General .....	24
5.3.2.9.2	MBS User Data Ingest Session Status Notification .....	24
6	API Definitions .....	25
6.1	Nmbssf_MBSUserService Service API .....	25
6.1.1	Introduction .....	25
6.1.2	Usage of HTTP .....	26
6.1.2.1	General .....	26
6.1.2.2	HTTP standard headers .....	26
6.1.2.2.1	General .....	26
6.1.2.2.2	Content type .....	26
6.1.2.3	HTTP custom headers .....	26
6.1.3	Resources .....	26
6.1.3.1	Overview .....	26
6.1.3.2	Resource: MBS User Services .....	27
6.1.3.2.1	Description .....	27
6.1.3.2.2	Resource Definition .....	27
6.1.3.2.3	Resource Standard Methods .....	27
6.1.3.2.3.1	GET .....	27
6.1.3.2.3.2	POST .....	28
6.1.3.2.4	Resource Custom Operations .....	29
6.1.3.3	Resource: Individual MBS User Service .....	29
6.1.3.3.1	Description .....	29
6.1.3.3.2	Resource Definition .....	29
6.1.3.3.3	Resource Standard Methods .....	29
6.1.3.3.3.1	GET .....	29
6.1.3.3.3.2	PUT .....	30
6.1.3.3.3.3	PATCH .....	31
6.1.3.3.3.4	DELETE .....	32
6.1.4	Custom Operations without associated resources .....	33
6.1.5	Notifications .....	33
6.1.6	Data Model .....	33
6.1.6.1	General .....	33
6.1.6.2	Structured data types .....	34
6.1.6.2.1	Introduction .....	34
6.1.6.2.2	Type: MBSUserService .....	35
6.1.6.2.3	Type: ServiceNameDescription .....	35
6.1.6.2.4	Type: MBSUserServicePatch .....	36
6.1.6.3	Simple data types and enumerations .....	36
6.1.6.3.1	Introduction .....	36
6.1.6.3.2	Simple data types .....	36
6.1.6.3.3	Enumeration: ServiceAnnouncementMode .....	36
6.1.6.4	Data types describing alternative data types or combinations of data types .....	36
6.1.6.5	Binary data .....	37
6.1.6.5.1	Binary Data Types .....	37
6.1.7	Error Handling .....	37
6.1.7.1	General .....	37
6.1.7.2	Protocol Errors .....	37
6.1.7.3	Application Errors .....	37
6.1.8	Feature negotiation .....	37
6.1.9	Security .....	37
6.2	Nmbssf_MBSUserDataIngestSession Service API .....	38
6.2.1	Introduction .....	38
6.2.2	Usage of HTTP .....	38
6.2.2.1	General .....	38
6.2.2.2	HTTP standard headers .....	38
6.2.2.2.1	General .....	38
6.2.2.2.2	Content type .....	38
6.2.2.3	HTTP custom headers .....	38
6.2.3	Resources .....	39

6.2.3.1	Overview .....	39
6.2.3.2	Resource: MBS User Data Ingest Sessions .....	40
6.2.3.2.1	Description .....	40
6.2.3.2.2	Resource Definition .....	40
6.2.3.2.3	Resource Standard Methods .....	41
6.2.3.2.3.1	GET .....	41
6.2.3.2.3.2	POST .....	41
6.2.3.2.4	Resource Custom Operations .....	42
6.2.3.3	Resource: Individual MBS User Data Ingest Session .....	42
6.2.3.3.1	Description .....	42
6.2.3.3.2	Resource Definition .....	42
6.2.3.3.3	Resource Standard Methods .....	43
6.2.3.3.3.1	GET .....	43
6.2.3.3.3.2	PUT .....	44
6.2.3.3.3.3	PATCH .....	45
6.2.3.3.3.4	DELETE .....	46
6.2.3.3.4	Resource Custom Operations .....	47
6.2.3.4	Resource: MBS User Data Ingest Session Status Subscriptions .....	47
6.2.3.4.1	Description .....	47
6.2.3.4.2	Resource Definition .....	47
6.2.3.4.3	Resource Standard Methods .....	47
6.2.3.4.3.1	GET .....	47
6.2.3.4.3.2	POST .....	48
6.2.3.4.4	Resource Custom Operations .....	49
6.2.3.5	Resource: Individual MBS User Data Ingest Session Status Subscription .....	49
6.2.3.5.1	Description .....	49
6.2.3.5.2	Resource Definition .....	49
6.2.3.5.3	Resource Standard Methods .....	49
6.2.3.5.3.1	GET .....	49
6.2.3.5.3.2	PUT .....	50
6.2.3.5.3.3	PATCH .....	51
6.2.3.5.3.4	DELETE .....	52
6.2.3.5.4	Resource Custom Operations .....	53
6.2.4	Custom Operations without associated resources .....	53
6.2.5	Notifications .....	53
6.2.5.1	General .....	53
6.2.5.2	MBS User Data Ingest Session Status Notification .....	54
6.2.5.2.1	Description .....	54
6.2.5.2.2	Target URI .....	54
6.2.5.2.3	Standard Methods .....	54
6.2.5.2.3.1	POST .....	54
6.2.6	Data Model .....	55
6.2.6.1	General .....	55
6.2.6.2	Structured data types .....	57
6.2.6.2.1	Introduction .....	57
6.2.6.2.2	Type: MBSUserDataIngestSession .....	58
6.2.6.2.3	Type: MBSDistributionSessionInfo .....	59
6.2.6.2.4	Type: MBSUserDataIngestSessionPatch .....	63
6.2.6.2.5	Type: ObjectDistrMethInfo .....	63
6.2.6.2.6	Type: PacketDistrMethInfo .....	64
6.2.6.2.7	Type MBSUserDataIngestStatSubsc .....	64
6.2.6.2.8	Type SubscribedEvent .....	65
6.2.6.2.9	Type MBSUserDataIngestStatNotif .....	65
6.2.6.2.10	Type EventNotification .....	65
6.2.6.2.11	Type MBSUserServAnmt .....	66
6.2.6.2.12	Type MBSDistSessionAnmt .....	67
6.2.6.2.13	Type ObjectDistMethAnmtInfo .....	68
6.2.6.2.14	Type: FECConfig .....	68
6.2.6.2.15	Type: AddFecParams .....	69
6.2.6.2.16	Type MBSUserDataIngestStatSubscPatch .....	69
6.2.6.3	Simple data types and enumerations .....	69
6.2.6.3.1	Introduction .....	69

6.2.6.3.2	Simple data types.....	69
6.2.6.3.3	Enumeration: DistributionMethod.....	69
6.2.6.3.4	Enumeration: Event.....	69
6.2.6.4	Data types describing alternative data types or combinations of data types .....	70
6.2.6.5	Binary data .....	71
6.2.6.5.1	Binary Data Types.....	71
6.2.7	Error Handling.....	71
6.2.7.1	General.....	71
6.2.7.2	Protocol Errors.....	71
6.2.7.3	Application Errors.....	71
6.2.8	Feature negotiation .....	71
6.2.9	Security.....	71
<b>Annex A (normative): OpenAPI specification.....</b>		<b>73</b>
A.1	General.....	73
A.2	Nmbssf_MBSUserService API.....	73
A.3	Nmbssf_MBSUserDataIngestSession API.....	78
<b>Annex B (informative): Withdrawn API versions.....</b>		<b>93</b>
B.1	General.....	93
B.2	Nmbssf_MBSUserService API.....	93
B.3	Nmbssf_MBSUserDataIngestSession API.....	93
<b>Annex C (informative): Change history .....</b>		<b>94</b>
History .....		95

---

# Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document



**might not** indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

**is** (or any other verb in the indicative mood) indicates a statement of fact

**is not** (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

---

# 1 Scope

The present document specifies the stage 3 protocol and data model for the Nmbfs Service Based Interface. It provides stage 3 protocol definitions and message flows, and specifies the API for each service offered by the MBSF.

The 5G System stage 2 architecture and procedures are specified in 3GPP TS 23.501 [2] and 3GPP TS 23.502 [3]. The stage 2 architecture and procedures for 5G Multicast/Broadcast Services are specified in 3GPP TS 23.247 [14] and 3GPP TS 26.502 [15].

The Technical Realization of the Service Based Architecture and the Principles and Guidelines for Services Definition are specified in 3GPP TS 29.500 [4] and 3GPP TS 29.501 [5].

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [3] 3GPP TS 23.502: "Procedures for the 5G System; Stage 2".
- [4] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [5] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [6] OpenAPI: "OpenAPI Specification Version 3.0.0", <https://spec.openapis.org/oas/v3.0.0>.
- [7] 3GPP TR 21.900: "Technical Specification Group working methods".
- [8] 3GPP TS 33.501: "Security architecture and procedures for 5G system".
- [9] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [10] 3GPP TS 29.510: "5G System; Network Function Repository Services; Stage 3".
- [11] IETF RFC 7540: "Hypertext Transfer Protocol Version 2 (HTTP/2)".
- [12] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [13] IETF RFC 7807: "Problem Details for HTTP APIs".
- [14] 3GPP TS 23.247: "Architectural enhancements for 5G multicast-broadcast services; Stage 2".
- [15] 3GPP TS 26.502: "5G Multicast-Broadcast User Service Architecture".
- [16] 3GPP TS 29.554: "5G System; Background Data Transfer Policy Control Service; Stage 3".
- [17] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".
- [18] 3GPP TS 29.122: "T8 reference point for northbound Application Programming Interfaces (APIs)".

- [19] OMA: "OMNA BCASST Service Class Registry",  
<https://technical.openmobilealliance.org/OMNA/bcast/bcast-service-class-registry.html>.
- [20] 3GPP TS 29.581: "5G System; Multicast/Broadcast Service Transport Services; Stage 3".
- [21] IANA: "Reliable Multicast Transport (RMT) FEC Encoding IDs and FEC Instance IDs",  
<https://www.iana.org/assignments/rmt-fec-parameters/rmt-fec-parameters.xhtml#rmt-fec-parameters-1>

---

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

For the purpose of the present document, the terms and definitions given in clause 3 of 3GPP TS 23.247 [14] and clause 3 of 3GPP TS 26.502 [15] also apply, including the ones referencing other specifications.

### 3.2 Symbols

Void.

### 3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

5QI	5G QoS Identifier
FEC	Forward Erasure Correction
MBS	Multicast/Broadcast Service.
MBSF	Multicast/Broadcast Service Function
MBSTF	Multicast/Broadcast Service Transport Function
QoS	Quality of Service
TMGI	Temporary Mobile Group Identity
URI	Uniform Resource Identifier

---

## 4 Overview

In the frame of Multicast/Broadcast Services (MBS), the Multicast/Broadcast Service Function (MBSF) provides services to NF service consumers (e.g. AF, NEF) via the Nmbssf service based interface. The MBSF supports for this purpose the functionalities defined in 3GPP TS 26.502 [15] and 3GPP TS 23.247 [14], i.e. service level functionalities to support MBS and control of the MBSTF, when used.

Figures<sup>o</sup>4-1 and 4.2 depict the Multicast/Broadcast related reference architecture of the MBSF respectively in SBI representation and reference point representation.

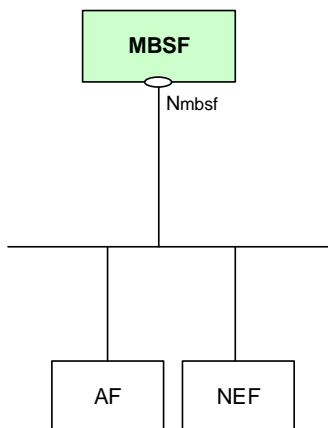


Figure 4-1: Reference model for the MBSF Services – SBI representation

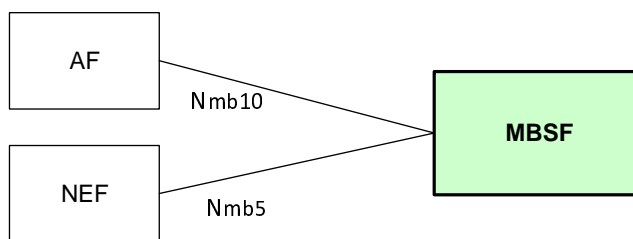


Figure 4-2: Reference Model for the MBSF Services – Reference point representation

## 5 Services offered by the MBSF

### 5.1 Introduction

The MBSF provides the following services:

- Nmbssf\_MBSUserService
- Nmbssf\_MBSUserDataIngestSession

Table 5.1-1 summarizes the corresponding APIs defined for this specification.

Table 5.1-1: API Descriptions

Service Name	Clause	Description	OpenAPI Specification File	apiName	Annex
Nmbssf_MBSUserService	5.2	MBS User Management Service	TS29580_Nmbssf_MBSUserService.yaml	nmbssf-mbs-us	A.2
Nmbssf_MBSUserDataIngestSession	5.3	MBS User Data Ingest Session Management Service	TS29580_Nmbssf_MBSUserDataIngestSession.yaml	nmbssf-mbs-ud-ingest	A.3

## 5.2 Nmbsf\_MBSUserService Service

### 5.2.1 Service Description

The Nmbsf\_MBSUserService service exposed by the MBSF enables an NF service consumer to:

- create a new MBS User Service;
- retrieve the properties of an existing MBS User Service;
- update/modify the properties of an existing MBS User Service; and
- delete an existing MBS User Service.

### 5.2.2 Service Operations

#### 5.2.2.1 Introduction

The service operations defined for the Nmbsf\_MBSUserService service are shown in table 5.2.2.1-1.

**Table 5.2.2.1-1: Nmbsf\_MBSUserService Service Operations**

Service Operation Name	Description	Initiated by
Nmbsf_MBSUserService_Create	This service operation enables the NF service consumer to create a new MBS User Service.	AF, NEF
Nmbsf_MBSUserService_Retrieve	This service operation enables the NF service consumer to retrieve the properties of an existing MBS User Service.	AF, NEF
Nmbsf_MBSUserService_Update	This service operation enables the NF service consumer to update an existing MBS User Service.	AF, NEF
Nmbsf_MBSUserService_Delete (NOTE)	This service operation enables the NF service consumer to delete an existing MBS User Service.	AF, NEF
NOTE: This service operation corresponds to the Nmbsf_MBSUserService_Destroy service operation defined in 3GPP TS 26.502 [15].		

#### 5.2.2.2 Nmbsf\_MBSUserService\_Create service operation

##### 5.2.2.2.1 General


This service operation is used by an NF service consumer to request the creation of a new MBS User Service at the MBSF.

The following procedures are supported by the "Nmbsf\_MBSUserServie\_Create" service operation:

- MBS User Service Creation.

##### 5.2.2.2.2 MBS User Service Creation

Figure 5.2.2.2.2-1 depicts a scenario where an NF service consumer requests the creation of a new MBS User Service at the MBSF.

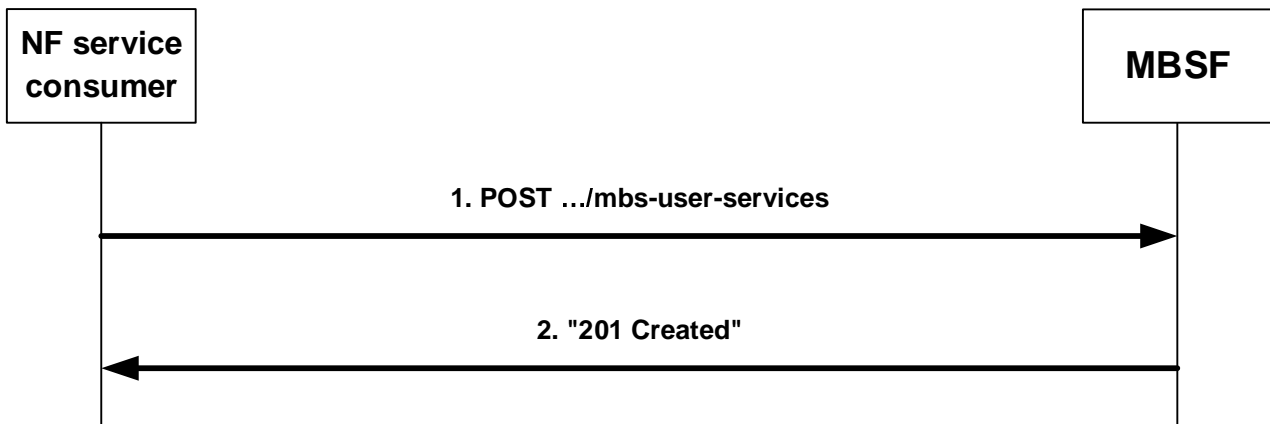

**Figure 5.2.2.2.2-1: MBS User Service Creation procedure**

1. In order to request the creation of a new MBS User Service, the NF service consumer shall send an HTTP POST request message to the MBSF targeting the "MBS User Services" collection resource, using the URI "{apiRoot}/nmbsf-mbs-us/<apiVersion>/mbs-user-services" as shown in step 1 of figure 5.2.2.2.2-1, with the request body including the MBSUserService data structure which shall contain:

- a list of external service identifier(s), within the "extServiceIds" attribute;
- the service type, within the the "servType" attribute;
- the service class, within the "servClass" attribute;
- a list of service announcement mode(s), within the "servAnnModes" attribute;
- one or several set(s) of per language service name(s) and/or service description(s), with the "servNameDescs" attribute; and
- the list of supported features, if feature negotiation needs to take place, within the "suppFeat" attribute;

and may include:

- the main service language, o within the "mainServLang" attribute.

2. Upon success, the MBSF shall create a new "Individual MBS User Service" resource and respond to the NF service consumer with a "201 Created" status code, as shown in figure 5.2.2.2.2-1, step 2, including an HTTP Location header field containing the URI of the created resource, and the response body containing a representation of the created "Individual MBS User Service" resource within the MBSUserService data structure.

On failure, the MBSF shall take proper error handling actions, as specified in clause 6.1.7, and respond to the NF service consumer with an appropriate error status code.

### 5.2.2.3 Nmbsf\_MBSUserService\_Retrieve service operation

#### 5.2.2.3.1 General


This service operation is used by an NF service consumer to retrieve the properties of an existing MBS User Service at the MBSF.

The following procedures are supported by the "Nmbsf\_MBSUserServie\_Retrieve" service operation:

- MBS User Service Retrieval.

#### 5.2.2.3.2 MBS User Service Retrieval

Figure 5.2.2.3.2-1 depicts a scenario where an NF service consumer requests the retrieval of the properties of an existing MBS User Service from the MBSF.

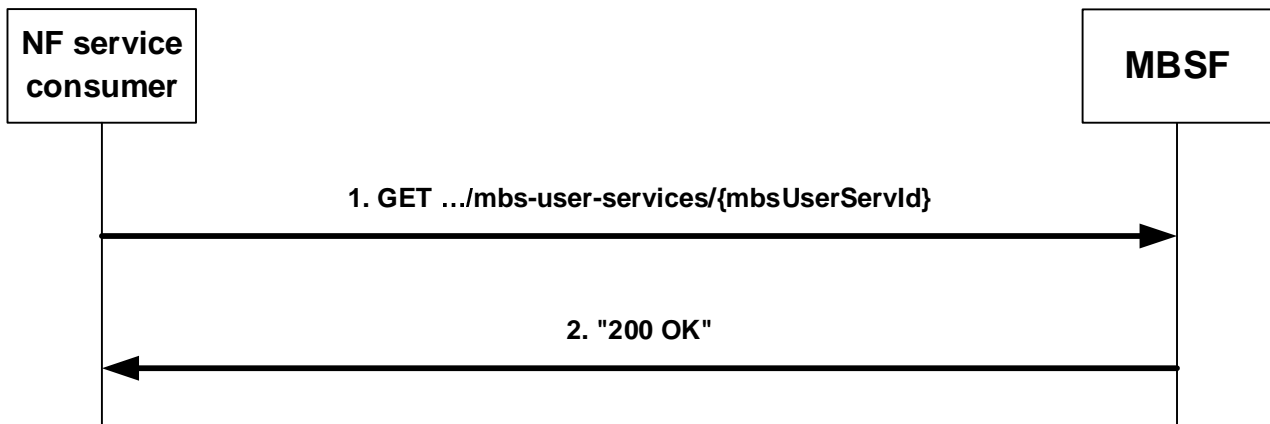

**Figure 5.2.2.3.2-1: MBS User Service Retrieval procedure**

1. In order to retrieve the properties of an existing MBS User Service, the NF service consumer shall send an HTTP GET request message targeting the corresponding "Individual MBS User Service" resource, using the URI "{apiRoot}/nmbsf-mbs-us/<apiVersion>/mbs-user-services/{mbsUserServId}", as shown in step 1 of figure 5.2.2.3.2-1.

If the MBSF determines that the received HTTP GET request needs to be redirected, the MBSF shall send an HTTP redirect response, as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

2. Upon success, the MBSF shall respond to the NF service consumer with an HTTP "200 OK" status code, as shown in step 2 of figure 5.2.2.3.2-1, with the response body including a representation of the requested "Individual MBS User Service" resource within the MBSUserService data structure.

On failure, the MBSF shall take proper error handling actions, as specified in clause 6.1.7, and respond to the NF service consumer with an appropriate error status code.

## 5.2.2.4 Nmbsf\_MBSUserService\_Update service operation

### 5.2.2.4.1 General


This service operation is used by an NF service consumer to request the update or modification of an existing MBS User Service at the MBSF.

The following procedures are supported by the "Nmbsf\_MBSUserServie\_Update" service operation:

- MBS User Service Update.

### 5.2.2.4.2 MBS User Service Update

Figure 5.2.2.4.2-1 depicts a scenario where an NF service consumer requests the update of an existing MBS User Service at the MBSF.

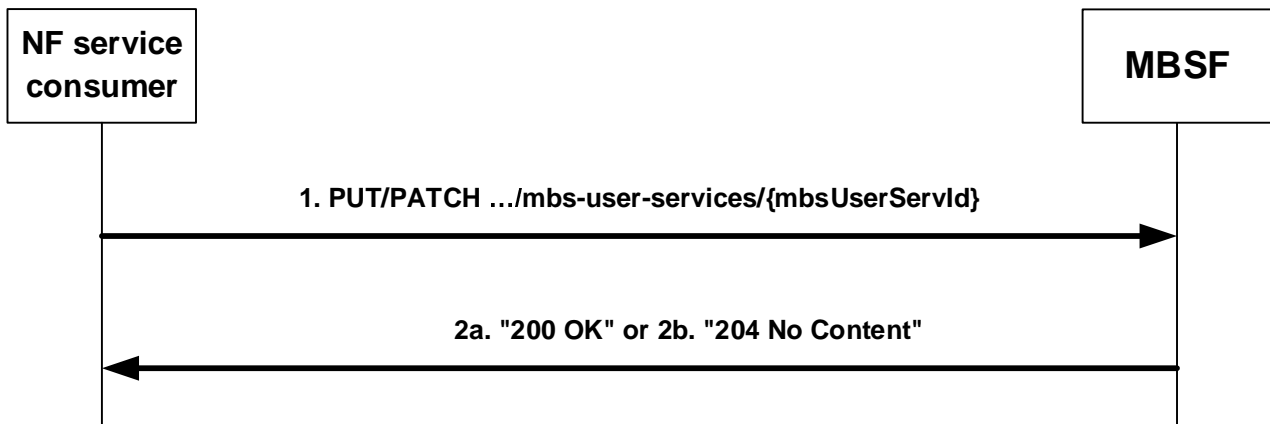

**Figure 5.2.2.4.2-1: MBS User Service Update procedure**

1. In order to request the update or modification of an existing MBS User Service, the NF service consumer shall send an HTTP PUT or PATCH request message targeting the corresponding "Individual MBS User Service" resource, using the URI "{apiRoot}/nmbsf-mbs-us/<apiVersion>/mbs-user-services/{mbsUserServId}" as shown in step 1 of figure 5.2.2.4.2-1, with the request body including the MBSUserService data structure (when HTTP PUT is used) or the MBSUserServicePatch data structure (when HTTP PATCH is used). Only the "servType" attribute shall not be updated.

If the MBSF determines that the received HTTP PUT or PATCH request message needs to be redirected, the MBSF shall send an HTTP redirect response, as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

2. Upon success, the MBSF shall update the concerned "Individual MBS User Service" resource and respond to the NF service consumer with either:
  - a) an HTTP "200 OK" status code with the response body containing an updated representation of the resource within the MBSUserService data structure, as shown in step 2a of figure 5.2.2.4.2-1; or
  - b) an HTTP "204 No Content" status code, as shown in step 2b of figure 5.2.2.4.2-1.

On failure, the MBSF shall take proper error handling actions, as specified in clause 6.1.7, and respond to the NF service consumer with an appropriate error status code.

## 5.2.2.5 Nmbsf\_MBSUserService\_Delete service operation

### 5.2.2.5.1 General

This service operation is used by the NF service consumer to request the deletion of an existing MBS User Service at the MBSF.


The following procedures are supported by the "Nmbsf\_MBSUserServie\_Delete" service operation:

- MBS User Service Deletion.

### 5.2.2.5.2 MBS User Service Deletion

Figure 5.2.2.5.2-1 depicts a scenario where an NF service consumer request the deletion of an existing MBS User Service at the MBSF.



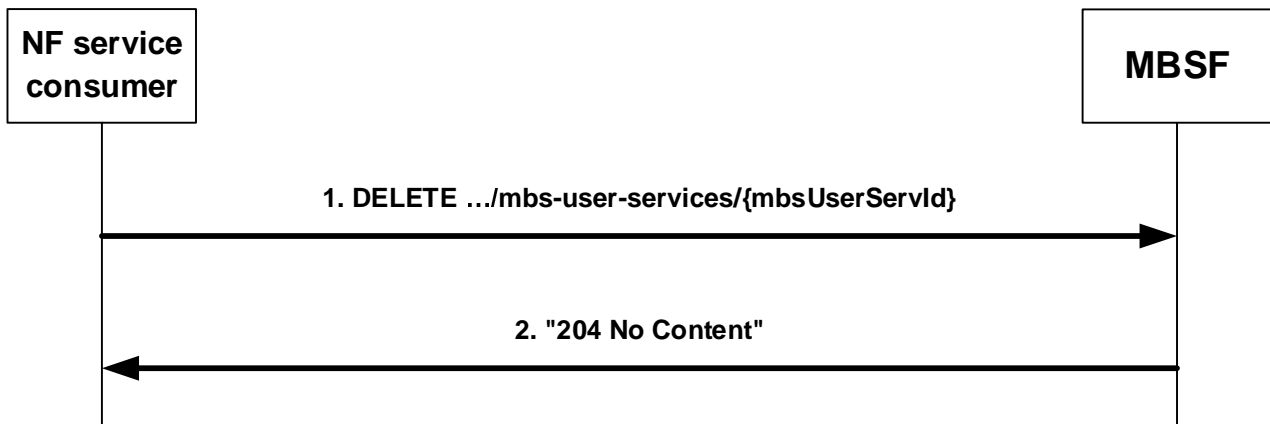

**Figure 5.2.2.5.2-1: MBS User Service Deletion procedure**

1. In order to request the deletion of an existing MBS User Service, the NF service consumer shall send an HTTP DELETE request message targeting the corresponding "Individual MBS User Service" resource using the URI "{apiRoot}/nmbsf-mbs-us/<apiVersion>/mbs-user-services/{mbsUserId}", as shown in step 1 of figure 5.2.2.5.2-1.

If the MBSF determines that the received HTTP DELETE request needs to be redirected, the MBSF shall send an HTTP redirect response, as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

2. Upon success, the MBSF shall:
  - delete the targeted "Individual MBS User Service" resource; and
  - respond to the NF service consumer with an HTTP "204 No Content" status code, as shown in step 2 of figure 5.2.2.5.2-1.

On failure, the MBSF shall take proper error handling actions, as specified in clause 6.1.7, and respond to the NF service consumer with an appropriate error status code.

## 5.3 Nmbsf\_MBSUserDataIngestSession Service

### 5.3.1 Service Description

The Nmbsf\_MBSUserDataIngestSession service exposed by the MBSF Server enables an NF service consumer to:

- create an MBS User Data Ingest Session, including a set of subordinate MBS Distribution Session(s);
- retrieve the properties of an existing MBS User Data Ingest Session;
- update an existing MBS User Data Ingest Session and its set of subordinate MBS Distribution Session(s);
- delete an MBS User Data Ingest Session along with its subordinate MBS Distribution Session(s);
- create a subscription to monitor event(s) related to the MBS User Data Ingest Session;
- update or modify an existing subscription to MBS User Data Ingest Session event(s) monitoring;
- delete an existing subscription to MBS User Data Ingest Session event(s) monitoring; and
- receive notification(s) about the event(s) related to the MBS User Data Ingest Session.

### 5.3.2 Service Operations

#### 5.3.2.1 Introduction

The service operations defined for the Nmbsf\_MBSUserDataIngestSession service are shown in table 5.3.2.1-1.

**Table 5.3.2.1-1: Nmbsf\_MBSUserDataIngestSession Service Operations**

Service Operation Name	Description	Initiated by
Nmbsf_MBSUserDataIngestSession_Create	This service operation enables the NF service consumer to request the creation of an MBS User Data Ingest Session, including a set of subordinate MBS Distribution Session(s).	AF, NEF
Nmbsf_MBSUserDataIngestSession_Retrieve	This service operation enables the NF service consumer to retrieve the properties of an existing MBS User Data Ingest Session.	AF, NEF
Nmbsf_MBSUserDataIngestSession_Update	This service operation enables the NF service consumer to update an existing MBS User Data Ingest Session and its set of subordinate MBS Distribution Session(s).	AF, NEF
Nmbsf_MBSUserDataIngestSession_Delete (NOTE)	This service operation enables the NF service consumer to delete an existing MBS User Data Ingest Session along with its subordinate MBS Distribution Session(s).	AF, NEF
Nmbsf_MBSUserDataIngestSession_StatusSubscribe	This service operation enables the NF service consumer to request the creation a subscription to monitor event(s) related to an MBS User Data Ingest Session.	AF, NEF
Nmbsf_MBSUserDataIngestSession_StatusSubscribeMod	This service operation enables the NF service consumer to request the update or modification of an existing subscription to monitor event(s) related to an MBS User Data Ingest Session.	AF, NEF
Nmbsf_MBSUserDataIngestSession_StatusUnsubscribe	This service operation enables the NF service consumer to request the deletion of an existing subscription to MBS User Data Ingest Session event(s) monitoring.	AF, NEF
Nmbsf_MBSUserDataIngestSession_StatusNotify	This service operation enables the NF service consumer to receive notification(s) from the MBSF about the event(s) related to an MBS User Data Ingest Session.	MBSF
NOTE:	This service operation corresponds to the Nmbsf_MBSUserDataIngestSession_Destroy service operation defined in 3GPP TS 26.502 [15].	

### 5.3.2.2 Nmbsf\_MBSUserDataIngestSession\_Create service operation

#### 5.3.2.2.1 General

This service operation is used by the NF service consumer to request the creation of an MBS User Data Ingest Session including a set of subordinate MBS Distribution Session(s).

The following procedures are supported by the "Nmbsf\_MBSUserDataIngestSession\_Create" service operation:

- MBS User Data Ingest Session Creation.

#### 5.3.2.2.2 MBS User Data Ingest Session Creation

Figure 5.3.2.2.2-1 depicts a scenario where an NF service consumer requests the creation of an MBS User Data Ingest Session including a set of subordinate MBS Distribution Session(s), at the MBSF.



**Figure 5.3.2.2.2-1: MBS User Data Ingest Session Creation procedure**

1. In order to create a new MBS User Data Ingest Session, including a set of subordinate MBS Distribution Session(s), the NF service consumer shall send an HTTP POST request message to the "Individual MBS User Data Ingest Sessions" collection resource, using the URI "{apiRoot}/nmbf-mbs-ud-ingest/<apiVersion>/sessions" as shown in step 1 of figure 5.3.2.2.2-1, with the request body including the MBSUserDataIngSession data structure which shall contain:

- the identifier of the parent MBS User Service, within the "mbsUserServiceId" attribute;
- one or several MBS Distribution Session(s), within the "mbsDisSessInfos" attribute; and
- the list of supported features, if feature negotiation needs to take place, within the "supFeat" attribute;

and may include:

- one or several set(s) of period(s) of time during which the MBS User Data Ingest Session is active in the MBS System, within the "actPeriods" attribute. NOTE: At the end of the last time period provided within the "actPeriods" attribute, the MBS User Data Ingest Session is automatically released and deleted by the MBSF

Within the "mbsDisSessInfos" attribute, the parameters of each MBS Distribution Session to be created are provided within the MBSDistributionSessionInfo data structure encoding the corresponding map entry, and:

- if no MBS session identifier is provided, i.e. the "mbsSessionId" is not provided, the MBSF shall request TMGI allocation as part of the creation of the corresponding MBS session at the MB-SMF; and
- if a source specific multicast address (SSM) is provided within the "mbsSessionId" attribute and the "locationDependent" attribute is present and set to "true" (i.e. to indicate a location dependent MBS service), the MBSF shall also request TMGI allocation as part of the creation of the corresponding MBS session at the MB-SMF.

2. Upon success, the MBSF shall create a new "Individual MBS User Data Ingest Session" resource and respond to the NF service consumer with an HTTP "201 Created" status code, as shown in step 2 of figure 5.3.2.2.2-1, including an HTTP Location header field containing the URI of the created resource and response body containing a representation of the created "Individual MBS User Data Ingest Session" resource within the MBSUserDataIngSession data structure.

On failure, the MBSF shall take proper error handling actions, as specified in clause 6.2.7, and respond to the NF service consumer with an appropriate error status code.

### 5.3.2.3 Nmbf\_MBSUserDataIngestSession\_Retrieve service operation

#### 5.3.2.3.1 General


This service operation is used by the NF service consumer to retrieve the properties of an existing MBS User Data Ingest Session.

The following procedures are supported by the "Nmbf\_MBSUserDataIngestSession\_Retrieve" service operation:

- MBS User Data Ingest Session Retrieval.

### 5.3.2.3.2 MBS User Data Ingest Session Retrieval

Figure 5.3.2.3.2-1 depicts a scenario where an NF service consumer retrieve the properties of an existing MBS User Data Ingest Session from the MBSF.

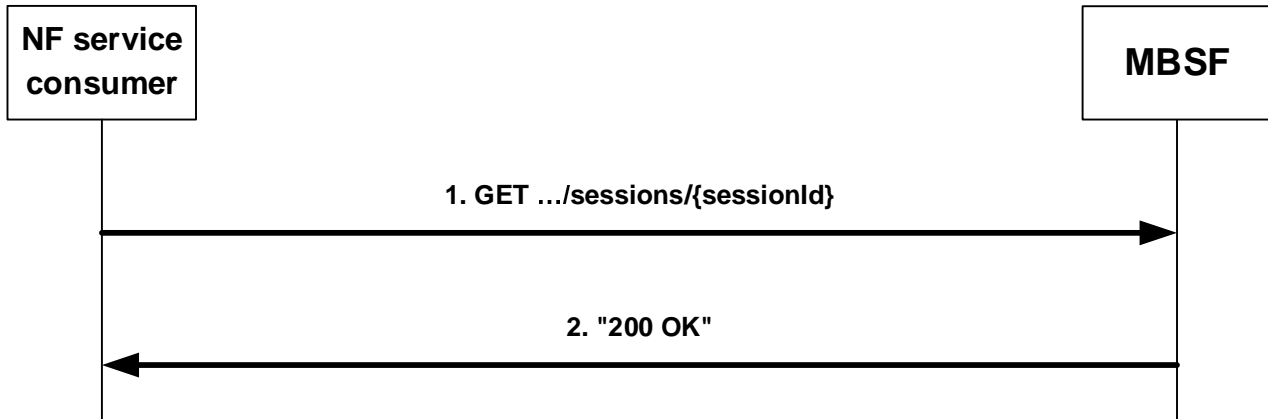

**Figure 5.3.2.3.2-1: MBS User Data Ingest Session Retrieval procedure**

1. In order to retrieve the properties of an existing MBS User Data Ingest Session, the NF service consumer shall send an HTTP GET request message targeting the corresponding "Individual MBS User Data Ingest Session" resource using the URI "{apiRoot}/nmbsf-mbs-ud-ingest/<apiVersion>/sessions/{sessionId}" as shown in step 1 of figure 5.3.2.3.2-1.

If the MBSF determines the received HTTP GET request message needs to be redirected, the MBSF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

2. Upon the reception of the HTTP GET request message, the MBSF shall respond with an HTTP "200 OK" status code, as shown in figure 5.3.2.3.2-1, step 2, with the response body including a representation of the requested the "Individual MBS User Data Ingest Session" within the MBSUserDataIngSession data structure

On failure, the MBSF shall take proper error handling actions, as specified in clause 6.2.7, and respond to the NF service consumer with an appropriate error status code.

### 5.3.2.4 Nmbsf\_MBSUserDataIngestSession\_Update service operation

#### 5.3.2.4.1 General


This service operation is used by the NF service consumer to request the update of an existing MBS User Data Ingest Session and potentially also its set of subordinate MBS Distribution Session(s) at the MBSF.

The following procedures are supported by the "Nmbsf\_MBSUserDataIngestSession\_Update" service operation:

- MBS User Data Ingest Session Update.

#### 5.3.2.4.2 MBS User Data Ingest Session Update

Figure 5.3.2.4.2-1 depicts a scenario where an NF service consumer request the update or modify of an existing MBS User Data Ingest Session and potentially also its set of subordinate MBS Distribution Session(s) at the MBSF.

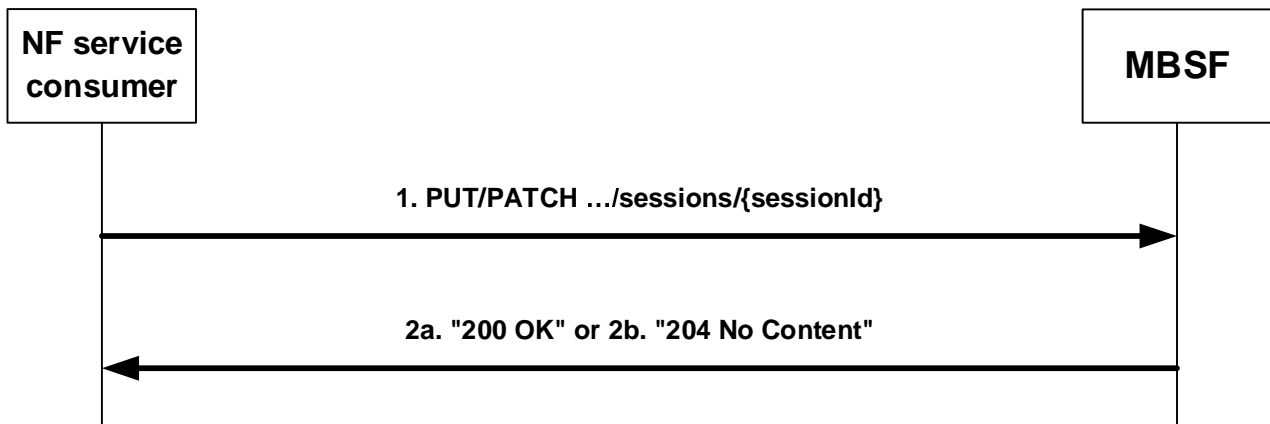

**Figure 5.3.2.4.2-1: MBS User Data Ingest Session Update procedure**

1. In order to request the update or modification of an existing MBS User Data Ingest Session and potentially also its set of subordinate MBS Distribution Session(s), the NF service consumer shall send an HTTP PUT or PATCH request message targeting the corresponding "Individual MBS User Data Ingest Session" resource using the URI "{apiRoot}/nmbsf-mbs-ud-ingest/<apiVersion>/sessions/{sessionId}", as shown in step 1 of figure 5.3.2.4.2-1, with the request body including the MBSUserDataIngSession data structure for an HTTP PUT request or the MBSUserDataIngSessionPatch data structure for an HTTP PATCH request.

The attributes that may be updated/modified at any time are as follows:

- the active periods of the MBS User Data Ingest Session, within the "actPeriods" attribute; and
- within each map entry of the "mbsDistSessInfos" attribute encoded using the MBSDistributionSessionInfo data structure:
- the MBS Service Information, within the "mbsServInfo" attribute;
- the MBS Frequency Selection Area (FSA) Identifier, for a broadcast service type, within the "mbsFSAId" attribute;
- the target service area(s), within the "tgtServArea" attribute.

The other attributes, with exception of the "mbsSessionId", the "mbsDistSessionId" and the "locationDependent" attributes that shall not be updated, all the other attributes within each map entry of the "mbsDistSessInfos" attribute encoded using the MBSDistributionSessionInfo data structure may be updated only if the MBS Distribution Session is in "INACTIVE" state.

As part of an MBS User Data Ingest Session update procedure, the AF may also add new MBS Distribution Session(s) and/or remove existing MBS Distribution Session(s). In order to do so:

- if a new MBS Distribution Session shall be created, the AF shall include its properties encoded using the MBSDistributionSessionInfo data structure as a map entry within the "mbsDistSessInfos" attribute with a newly assigned string based map key that shall be unique within the scope of the parent MBS User Data Ingest Session; and
- if an existing MBS Distribution Session shall be deleted, the AF shall include the corresponding map entry set to the value "NULL" within the "mbsDistSessInfos" attribute with the map key set to its string based map key provisioned during the request that initially created of the MBS Distribution Session.

If the MBSF determines that the received HTTP PUT or PATCH request needs to be redirected, the MBSF shall send an HTTP redirect response, as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

2. Upon success, the MBSF shall respond with either:
  - a) an HTTP "200 OK" status code with the response body containing the updated representation of the "Individual MBS User Data Ingest Session" resource within the MBSUserDataIngSession data structure, as shown in step 2a of figure 5.3.2.4.2-1; or
  - b) an HTTP "204 No Content" status code, as shown in step 2b of figure 5.3.2.4.2-1.

On failure, the MBSF shall take proper error handling actions, as specified in clause 6.2.7, and respond to the NF service consumer with an appropriate error status code.

### 5.3.2.5 Nmbf\_MBSUserDataIngestSession\_Delete service operation

#### 5.3.2.5.1 General


This service operation is used by the NF service consumer to request the deletion of an MBS User Data Ingest Session along with its subordinate MBS Distribution Session(s) at the MBSF.

The following procedures are supported by the "Nmbf\_MBSUserDataIngestSession\_Delete" service operation:

- MBS User Data Ingest Session Deletion.

#### 5.3.2.5.2 MBS User Data Ingest Session Deletion

Figure 5.3.2.5.2-1 depicts a scenario where an NF service consumer request the deletion of an existing MBS User Data Ingest Session at the MBSF.

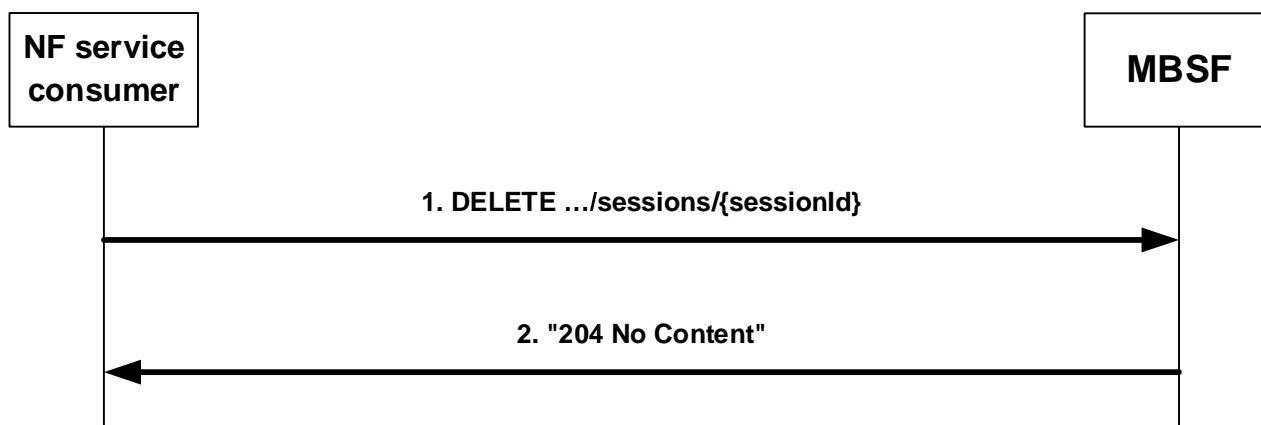

**Figure 5.3.2.5.2-1: MBS User Data Ingest Session Deletion procedure**

1. In order to request the deletion of an existing MBS User Data Ingest Session along with its subordinate MBS Distribution Session(s), the NF service consumer shall send an HTTP DELETE request message targeting the corresponding "Individual MBS User Data Ingest Session" resource using the URI "{apiRoot}/nmbf-mbs-ud-ingest/<apiVersion>/sessions/{sessionId}", as shown in step 1 of figure 5.3.2.5.2-1.

If the MBSF determines that the received HTTP DELETE request message needs to be redirected, the MBSF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

2. Upon success, the MBSF shall:

- remove the targeted "Individual MBS User Data Ingest Session" resource; and
- respond with an HTTP "204 No Content" status code, as shown in step 2 of figure 5.3.2.5.2-1.

On failure, the MBSF shall take proper error handling actions, as specified in clause 6.2.7, and respond to the NF service consumer with an appropriate error status code.

### 5.3.2.6 Nmbf\_MBSUserDataIngestSession\_StatusSubscribe service operation

#### 5.3.2.6.1 General


This service operation is invoked by the NF service consumer to request the creation of a subscription to MBS User Data Ingest Session Status event(s) reporting at the MBSF.

The following procedures are supported by the "Nmbf\_MBSUserDataIngestSession\_StatusSubscribe" service operation:

- MBS User Data Ingest Session Status Subscription Creation.

### 5.3.2.6.2 MBS User Data Ingest Session Status Subscription Creation

Figure 5.3.2.6.2-1 depicts a scenario where an NF service consumer requests the creation of a subscription to MBS User Data Ingest Session Status event(s) reporting at the MBSF.

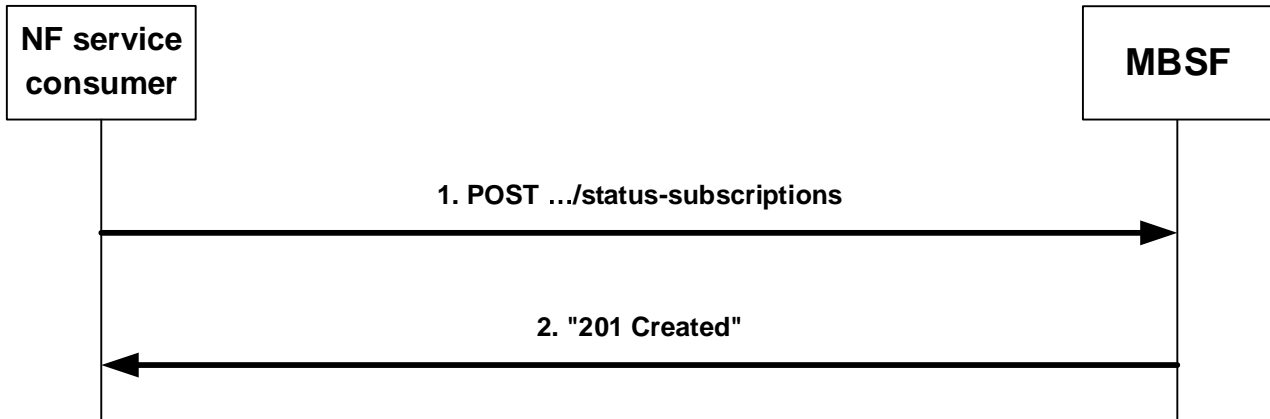

**Figure 5.3.2.6.2-1: MBS User Data Ingest Session Status Subscription Creation procedure**

- In order to request the creation of a new MBS User Data Ingest Session Status Subscription, the NF service consumer shall send an HTTP POST request message targeting the "MBS User Data Ingest Session Status Subscriptions" resource using the URI "{apiRoot}/nmbsf-mbs-ud-ingest/<apiVersion>/status-subscriptions" as shown in step 1 of figure 5.3.2.6.2-1, with the request body including the MBSUserDataIngStatSubsc data structure that shall contain:
  - the identifier of the MBS User Data Ingest Session to which the subscription is related, within as the "mbsIngSessionId" attribute;
  - the URI towards which the notifications should be sent, within the "notifUri" attribute; and
  - the list of subscribed MBS User Data Ingest Session Status event(s), within the "eventsubscs" attribute.
- Upon success, the MBSF shall create a new "Individual MBS User Data Ingest Session Status Subscription" resource and respond to the NF service consumer with an HTTP "201 Created" status code, as shown in step 2 of figure 5.3.2.6.2-1, including an HTTP Location header field containing the URI of the created resource, i.e. "{apiRoot}/nmbsf-mbs-ud-ingest/<apiVersion>/status-subscriptions/{subscriptionId}", and the response body containing a representation of the created "Individual MBS User Data Ingest Session Status Subscription" resource within the MBSUserDataIngStatSubsc data structure.

On failure, the MBSF shall take proper error handling actions, as specified in clause 6.2.7, and respond to the NF service consumer with an appropriate error status code.

### 5.3.2.7 Nmbsf\_MBSUserDataIngestSession\_StatusSubscribeMod service operation

#### 5.3.2.7.1 General


This service operation is invoked by the NF service consumer to request the update/modification of a subscription to MBS User Data Ingest Session Status event(s) reporting at the MBSF.

The following procedures are supported by the "Nmbsf\_MBSUserDataIngestSession\_StatusSubscribeMod" service operation:

- MBS User Data Ingest Session Status Subscription Update.

### 5.3.2.7.2 MBS User Data Ingest Session Status Subscription Update

Figure 5.3.2.6.2-1 depicts a scenario where an NF service consumer requests the update/modification of a subscription to MBS User Data Ingest Session Status event(s) reporting at the MBSF.

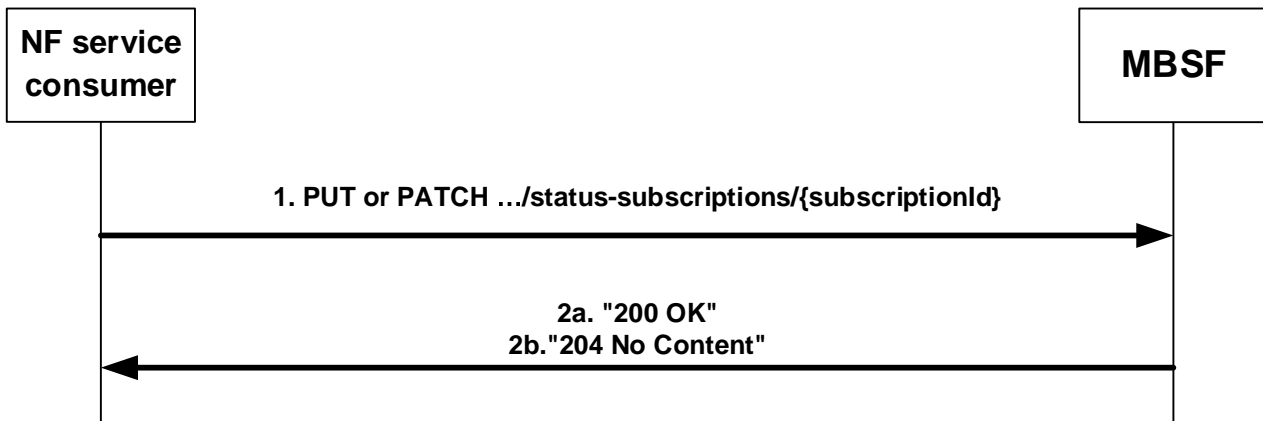

**Figure 5.3.2.7.2-1: MBS User Data Ingest Session Status Subscription Update procedure**

1. In order to request the update or modification of an existing MBS User Data Ingest Session Status Subscription, the NF service consumer shall send an HTTP PUT or PATCH request message targeting the corresponding "Individual MBS User Data Ingest Session Status Subscription" resource using the URI "{apiRoot}/nmbf-mbsuserdataing/<apiVersion>/status-subscriptions/{subscriptionId}", as shown in step 1 of figure 5.3.2.7.2-1, with the request body including the MBSUserDataIngStatSubsc data structure for an HTTP PUT request or the MBSUserDataIngStatSubscPatch for an HTTP PATCH request.
2. Upon success, the MBSF shall update/modify the corresponding "Individual MBS User Data Ingest Session Status Subscription" resource and respond to the NF service consumer with either:
  - a) an HTTP "200 OK" status code with the response body containing the updated representation of the "Individual MBS User Data Ingest Session Status Subscription" resource within the MBSUserDataIngStatSubsc data structure, as shown in step 2a of figure 5.3.2.7.2-1; or
  - b) an HTTP "204 No Content" status code, as shown in step 2b of figure 5.3.2.7.2-1.

On failure, the MBSF shall take proper error handling actions, as specified in clause 6.2.7, and respond to the NF service consumer with an appropriate error status code.

### 5.3.2.8 Nmbf\_MBSUserDataIngestSession\_StatusUnsubscribe service operation

#### 5.3.2.8.1 General

This service operation is used by the NF service consumer to request the deletion of an existing MBS User Data Ingest Session Status Subscription at the MBSF.


The following procedures are supported by the "Nmbf\_MBSUserDataIngestSession\_StatusUnsubscribe" service operation:

- MBS User Data Ingest Session Status Subscription Deletion.

#### 5.3.2.8.2 MBS User Data Ingest Session Status Subscription Deletion

Figure 5.3.2.8.2-1 depicts a scenario where an NF service consumer requests the deletion of an existing MBS User Data Ingest Session Status Subscription at the MBSF.



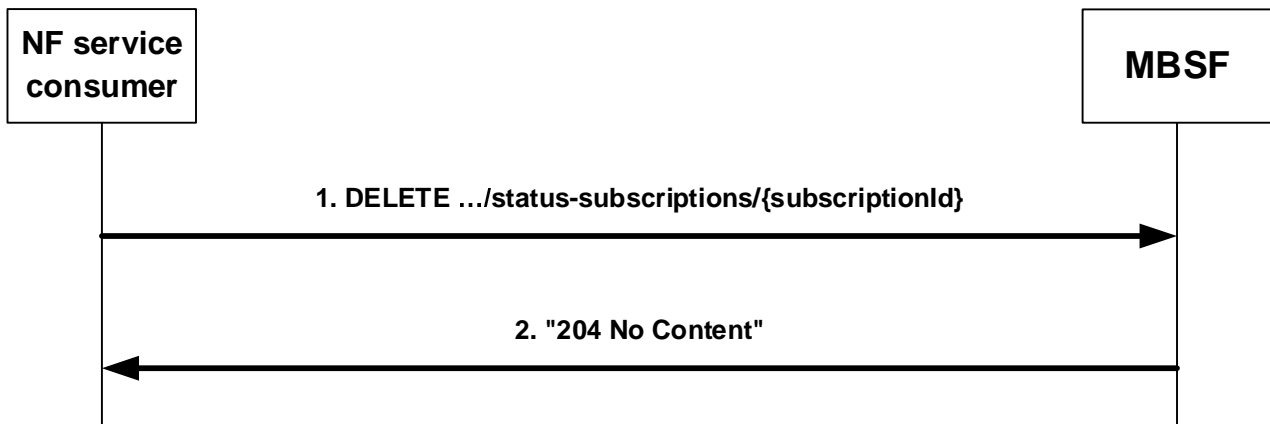

**Figure 5.3.2.8.2-1: MBS User Data Ingest Session Status Subscription Deletion procedure**

1. In order to remove an existing status subscription to the MBS User Data Ingest Session, the NF service consumer shall send an HTTP DELETE request message to the resource URI "{apiRoot}/nmbf-mbs-ud-ingest/<apiVersion>/status-subscriptions/{subscriptionId}" as shown in step 1 of figure 5.3.2.7.2-1.

If the MBSF determines that the received HTTP DELETE request message needs to be redirected, the MBSF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

2. Upon success, the MBSF shall:
  - delete the corresponding "Individual MBS User Data Ingest Session Status Subscription" resource; and
  - respond to the NF service consumer with an HTTP "204 No Content" status code, as shown in step 2 of figure 5.3.2.7.2-1.

On failure, the MBSF shall take proper error handling actions, as specified in clause 6.2.7, and respond to the NF service consumer with an appropriate error status code.

## 5.3.2.9 Nmbf\_MBSUserDataIngestSession\_StatusNotify service operation

### 5.3.2.9.1 General


This service operation is used by the MBSF to notify a previously subscribed NF service consumer on MBS User Data Ingest Session Status event(s).

The following procedures are supported by the "Nmbf\_MBSUserDataIngestSession\_StatusNotify" service operation:

- MBS User Data Ingest Session Status Notification.

### 5.3.2.9.2 MBS User Data Ingest Session Status Notification

Figure 5.3.2.9.2-1 depicts a scenario where the MBSF sends a notification request to a previously subscribed NF service consumer on MBS User Data Ingest Session Status event(s).

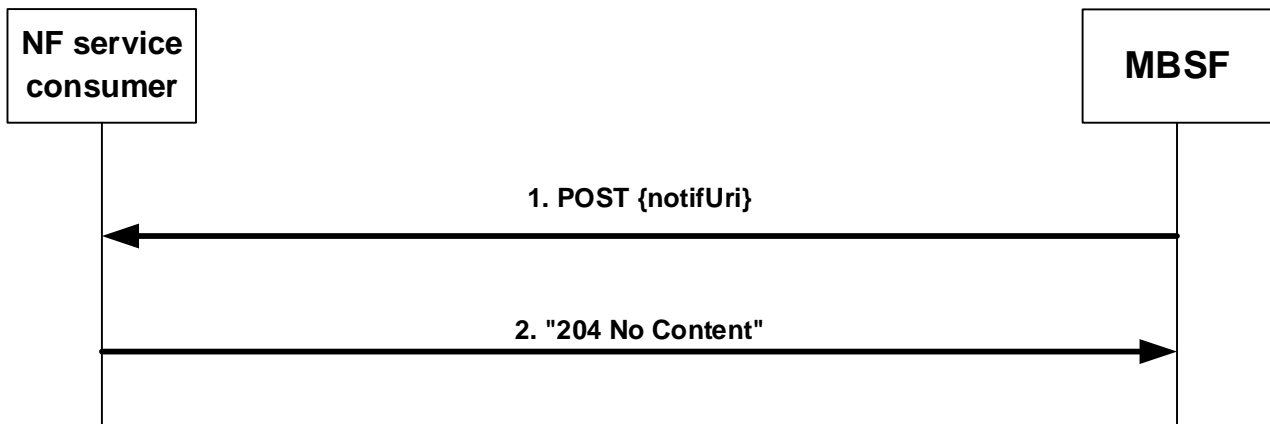

**Figure 5.3.2.9.2-1: MBS User Data Ingest Session Status Notification procedure**

1. In order to notify the NF service consumer on the occurrence of previously subscribed MBS User Data Ingest Session Status event(s), the MBSF shall send an HTTP POST request targeting the URI "{notifUri}", with the "notifUri" variable set to the notification URI received during the creation of the corresponding MBS User Data Ingest Session Status Subscription as specified in clause 5.3.2.6.2, and the request body including the MBSUserDataIngestStatNotif data structure that shall include:

- the identifier of the MBS User Data Ingest Session to which the notification is related, within the "mbsIngSessionId" attribute; and
- the reported MBS User Data Ingest Session Status event(s), within the "eventNotifs" attribute.

If the NF service consumer determines that the received HTTP POST request message needs to be redirected, the NF service consumer shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

2. Upon success, the NF Service Consumer shall respond to the MBSF with an HTTP "204 No Content" status code.

On failure, the NF service consumer shall take proper error handling actions, as specified in clause 6.2.7, and respond to the MBSF with an appropriate error status code.

---

## 6 API Definitions

### 6.1 Nmbsf\_MBSUserService Service API

#### 6.1.1 Introduction

The Nmbsf\_MBSUserService service shall use the Nmbsf\_MBSUserService API.

The API URI of the Nmbsf\_MBSUserService API shall be:

**{apiRoot}/<apiName>/<apiVersion>**

The request URIs used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

**{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>**

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].
- The <apiName> shall be "nmbsf-mbs-us".
- The <apiVersion> shall be "v1".

- The <apiSpecificResourceUriPart> shall be set as described in clause 6.1.3.

## 6.1.2 Usage of HTTP

### 6.1.2.1 General

HTTP/2, IETF RFC 7540 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Nmbsf\_MBSUserService API is contained in Annex A.2.

### 6.1.2.2 HTTP standard headers

#### 6.1.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

#### 6.1.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".


"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 7807 [13].

### 6.1.2.3 HTTP custom headers

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [4] shall be supported, and the optional HTTP custom header fields specified in clause 5.2.3.3 of 3GPP TS 29.500 [4] may be supported.

## 6.1.3 Resources

### 6.1.3.1 Overview

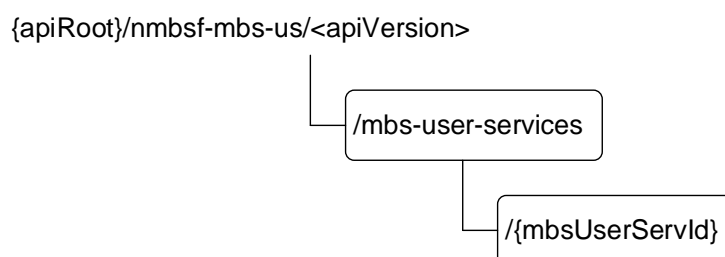

**Figure 6.1.3.1-1: Resource URI structure of the Nmbsf\_MBSUserService API**

Table 6.1.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 6.1.3.1-1: Resources and methods overview

Resource purpose/name	Resource URI (relative path after API URI)	HTTP method or custom operation	Description (service operation)
MBS User Services	/mbs-user-services	GET	Retrieve all the active MBS User Sessions managed by the MBSF.
		POST	Request the creation of a new MBS User Service.
Individual MBS User Service	/mbs-user-services/{mbsUserServId}	GET	Retrieve an existing MBS User Service managed by the MBSF.
		PUT	Update an existing MBS User Service managed by the MBSF.
		PATCH	Modify an existing MBS User Service managed by the MBSF.
		DELETE	Delete an existing MBS User Service managed by the MBSF.

### 6.1.3.2 Resource: MBS User Services

#### 6.1.3.2.1 Description

This resource represents the collection of MBS User Services managed by the MBSF.

#### 6.1.3.2.2 Resource Definition

Resource URI: {apiRoot}/nmbsf-mbs-us/<apiVersion>/mbs-user-services

This resource shall support the resource URI variables defined in table 6.1.3.2.2-1.

Table 6.1.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.1.1.

#### 6.1.3.2.3 Resource Standard Methods

##### 6.1.3.2.3.1 GET

The GET method allows an NF service consumer (e.g. AF, NEF) to retrieve all the active MBS User Services managed by the MBSF.

This method shall support the URI query parameters specified in table 6.1.3.2.3.1-1.

Table 6.1.3.2.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.1.3.2.3.1-2 and the response data structures and response codes specified in table 6.1.3.2.3.1-3.

Table 6.1.3.2.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

**Table 6.1.3.2.3.1-3: Data structures supported by the GET Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
array(MBSUserService)	M	1..N	200 OK	Successful case. All the active MBS User Services managed by the MBSF are returned.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
NOTE: The mandatory HTTP error status code for the HTTP GET method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.1.3.2.3.1-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected

**Table 6.1.3.2.3.1-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected

#### 6.1.3.2.3.2 POST

The POST method allows an NF service consumer (e.g. AF, NEF) to request the creation of a new MBS User Service.

This method shall support the URI query parameters specified in table 6.1.3.2.3.2-1.

**Table 6.1.3.2.3.2-1: URI query parameters supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.1.3.2.3.2-2 and the response data structures and response codes specified in table 6.1.3.2.3.2-3.

**Table 6.1.3.2.3.2-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
MBSUserService	M	1	Contains the parameters to request the creation of a new MBS User Service.

**Table 6.1.3.2.3-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
MBSUserService	M	1	201 Created	Successful case. The MBS User Service is successfully created and a representation of the created Individual MBS User Service resource is returned.  An HTTP "Location" header that contains the resource URI of the created Individual MBS User Service resource shall also be included.
NOTE: The mandatory HTTP error status code for the HTTP POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.1.3.2.3-4: Headers supported by the 201 response code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/nmbsf-mbs-us/<apiVersion>/mbs-user-services/{mbsUserServId}

#### 6.1.3.2.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

### 6.1.3.3 Resource: Individual MBS User Service

#### 6.1.3.3.1 Description

This resource represents an "Individual MBS User Service" resource managed by the MBSF.

#### 6.1.3.3.2 Resource Definition

Resource URI: **{apiRoot}/nmbsf-mbs-us/<apiVersion>/mbs-user-services/{mbsUserSevId}**

This resource shall support the resource URI variables defined in table 6.1.3.3.2-1.

**Table 6.1.3.3.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 6.1.1.
mbsUserServId	string	Represents the unique identifier of the Individual MBS User Service resource, assigned by the MBSF.

#### 6.1.3.3.3 Resource Standard Methods

##### 6.1.3.3.3.1 GET

The GET method allows an NF service consumer (e.g. AF, NEF) to retrieve an existing Individual MBS User Service resource managed by the MBSF.

This method shall support the URI query parameters specified in table 6.1.3.3.3.1-1.

**Table 6.1.3.3.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.1.3.3.3.1-2 and the response data structures and response codes specified in table 6.1.3.3.3.1-3.

**Table 6.1.3.3.3.1-2: Data structures supported by the GET Request Body on this resource**

Data type	P	Cardinality	Description
n/a			

**Table 6.1.3.3.3.1-3: Data structures supported by the GET Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
MBSUserService	M	1	200 OK	Successful case. The requested Individual MBS User Service resource is returned.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
NOTE: The mandatory HTTP error status code for the HTTP GET method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.1.3.3.3.1-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected

**Table 6.1.3.3.3.1-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected

#### 6.1.3.3.3.2 PUT

The PUT method allows an NF service consumer (e.g. AF, NEF) to request the update of an existing MBS User Service at the MBSF.

This method shall support the URI query parameters specified in table 6.1.3.3.3.2-1.

**Table 6.1.3.3.3.2-1: URI query parameters supported by the PUT method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.1.3.3.3.2-2 and the response data structures and response codes specified in table 6.1.3.3.3.2-3.

**Table 6.1.3.3.3.2-2: Data structures supported by the PUT Request Body on this resource**

Data type	P	Cardinality	Description
MBSUserService	M	1	Contains the updated representation of the existing Individual MBS User Service resource that is to be updated.

**Table 6.1.3.3.3.2-3: Data structures supported by the PUT Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
MBSUserService	M	1	200 OK	Successful case. The concerned Individual MBS User Service resource is successfully updated and a representation of the updated resource is returned to the NF service consumer in the response body.
n/a			204 No Content	Successful case. The concerned Individual MBS User Service resource is successfully updated and no content is returned in the response body.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.

NOTE: The mandatory HTTP error status code for the HTTP PUT method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.

**Table 6.1.3.3.3.2-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**Table 6.1.3.3.3.2-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

### 6.1.3.3.3.3 PATCH

The PATCH method allows an NF service consumer (e.g. AF, NEF) to request the modification of an existing MBS User Service at the MBSF.

This method shall support the URI query parameters specified in table 6.1.3.3.3.3-1.

**Table 6.1.3.3.3.3-1: URI query parameters supported by the PATCH method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.1.3.3.3.3-2 and the response data structures and response codes specified in table 6.1.3.3.3.3-3.



**Table 6.1.3.3.3.2: Data structures supported by the PATCH Request Body on this resource**

Data type	P	Cardinality	Description
MBSUserServicePatch	M	1	Contains the parameters to request the modification of an existing Individual MBS User Service resource.

**Table 6.1.3.3.3.3: Data structures supported by the PATCH Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
MBSUserService	M	1	200 OK	Successful case. The concerned Individual MBS User Service resource is successfully modified and a representation of the updated resource is returned to the NF service consumer in the response body.
n/a			204 No Content	Successful case. The concerned Individual MBS User Service resource is successfully modified and no content is returned in the response body.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
NOTE: The mandatory HTTP error status code for the HTTP PATCH method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.1.3.3.3.4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**Table 6.1.3.3.3.5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

#### 6.1.3.3.3.4 DELETE

The DELETE method allows an NF service consumer (e.g. AF, NEF) to request the deletion of an existing MBS User Service at the MBSF.

This method shall support the URI query parameters specified in table 6.1.3.3.3.4-1.

**Table 6.1.3.3.3.4-1: URI query parameters supported by the DELETE method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.1.3.3.3.4-2 and the response data structures and response codes specified in table 6.1.3.3.3.4-3.

**Table 6.1.3.3.3.4-2: Data structures supported by the DELETE Request Body on this resource**

Data type	P	Cardinality	Description
n/a			

**Table 6.1.3.3.3.4-3: Data structures supported by the DELETE Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case. The concerned Individual MBS User Service resource is successfully deleted.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.

NOTE: The mandatory HTTP error status code for the HTTP DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.

**Table 6.1.3.3.3.4-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**Table 6.1.3.3.3.4-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

## 6.1.4 Custom Operations without associated resources

There are no custom operations without associated resources defined for this API in this release of the specification.

## 6.1.5 Notifications

There are no notifications defined for this API in this release of the specification.

## 6.1.6 Data Model

### 6.1.6.1 General

This clause specifies the application data model supported by the Nmbfsf\_MBSUserService API.

Table 6.1.6.1-1 specifies the data types defined for the Nmbfsf\_MBSUserService service based interface protocol.

**Table 6.1.6.1-1: Nmbsf\_MBSUserService specific Data Types**

Data type	Clause defined	Description	Applicability
MBSUserService	6.1.6.2.2	Represents the parameters of an MBS User Service.	
MBSUserServicePatch	6.1.6.2.4	Represents the requested modification to the parameters of an MBS User Service.	
ServiceAnnouncementMode	6.1.6.3.3	Represents a service announcement mode.	
ServiceNameDescription	6.1.6.2.3	Represents a set of per language service Name and/or service description.	
ServiceType	6.1.6.3.4	Represents MBS User Service distribution type.	

Table 6.1.6.1-2 specifies data types re-used by the Nmbsf\_MBSUserService service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Nmbsf\_MBSUserService service based interface.

**Table 6.1.6.1-2: Nmbsf\_MBSUserService re-used Data Types**

Data type	Reference	Comments	Applicability
MbsServiceType	3GPP TS 29.571 [17]	Indicates whether this MBS User Service is distributed via Multicast MBS Session(s) or Broadcast MBS Session(s).	
NetworkAreaInfo	3GPP TS 29.554 [16]	Contains the service areas in which this MBS User Service is to be made available.	
SupportedFeatures	3GPP TS 29.571 [17]	Used to negotiate the applicability of optional features.	
Uri	3GPP TS 29.571 [17]	Represents a URI.	

## 6.1.6.2 Structured data types

### 6.1.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

## 6.1.6.2.2 Type: MBSUserService

Table 6.1.6.2.2-1: Definition of type MBSUserService

Attribute name	Data type	P	Cardinality	Description	Applicability
extServiceIds	array(Uri)	M	1..N	Represents the external service identifier(s) of this MBS User Service.	
servType	MbsServiceType	M	1	Indicates the requested service type (i.e. multicast or broadcast).	
servClass	Uri	M	1	Represents the class of the MBS User Service, expressed as a term identifier from the OMA BCAST Service Class Registry [19], e.g.: <i>urn:oma:bcas:oma_bsc:st:1.0</i> .	
servAnnModes	array(ServiceAnnouncementMode)	M	1..N	Represents the MBS User Service Announcement Mode(s), i.e. how the MBS User Service Announcement compiled by the MBSF is advertised to the MBSF Client.	
servNameDescs	array(ServiceNameDescription)	M	1..N	Contains one or several set(s) of per language distinguishing service name and/or service description for this MBS User Service.	
mainServLang	string	O	0..1	Represents the main service language of this MBS User Service.	
suppFeat	SupportedFeatures	C	0..1	Used to negotiate the supported optional features of the API described in clause 6.1.8. This attribute shall be provided in the HTTP POST request and response if feature negotiation needs to take place.	

## 6.1.6.2.3 Type: ServiceNameDescription

Table 6.1.6.2.3-1: Definition of type ServiceNameDescription

Attribute name	Data type	P	Cardinality	Description	Applicability
servName	string	C	0..1	Represents a distinguishing name for this MBS User Service per language. (NOTE)	
servDescrip	string	C	0..1	Contains description of this MBS User Service per language. (NOTE)	
language	string	M	1	Represents the language of the distinguishing name and description for this MBS User Service.	

NOTE: At least one of the "servName" attribute and the "servDescrip" attribute shall be included.

## 6.1.6.2.4 Type: MBSUserServicePatch

**Table 6.1.6.2.4-1: Definition of type MBSUserServicePatch**

Attribute name	Data type	P	Cardinality	Description	Applicability
extServiceIds	array(Uri)	O	1..N	Represents the updated set of external service identifier(s) of the MBS User Service.	
servClass	Uri	O	0..1	Represents the class of the MBS User Service, expressed as a term identifier from the OMNA BCAST Service Class Registry [19].	
servAnnModes	array(ServiceAnnouncementMode)	O	1..N	Represents the updated MBS User Service Announcement Mode(s) .	
servNameDescs	array(ServiceNameDescription)	O	1..N	Contains the updated set(s) of per language distinguishing service name and/or service description for the MBS User Service.	
mainServLang	string	O	0..1	Represents the main service language of the MBS User Service.	

## 6.1.6.3 Simple data types and enumerations

## 6.1.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

## 6.1.6.3.2 Simple data types

The simple data types defined in table 6.1.6.3.2-1 shall be supported.

**Table 6.1.6.3.2-1: Simple data types**

Type Name	Type Definition	Description	Applicability

## 6.1.6.3.3 Enumeration: ServiceAnnouncementMode

The enumeration ServiceAnnouncementMode represents Service Announce Mode. It shall comply with the provisions defined in table 6.1.6.3.3-1.

**Table 6.1.6.3.3-1: Enumeration ServiceAnnouncementMode**

Enumeration value	Description	Applicability
VIA_MBS_5	Indicates the MBS User Service Announcement compiled by the MBSF is advertised to the MBSF Client at reference point MBS-5.	
VIA_MBS_DISTRIBUTION_SESSION	Indicates the MBS User Service Announcement compiled by the MBSF is advertised to the MBSF Client via the MBS Distribution Session.	
PASSED_BACK	MBS User Service Announcement compiled by the MBSF is passed back to the MBS Application Provider.	

## 6.1.6.4 Data types describing alternative data types or combinations of data types

There are no data types describing alternative data types or combinations of data types defined for this API in this release of the specification.

## 6.1.6.5 Binary data

### 6.1.6.5.1 Binary Data Types

**Table 6.1.6.5.1-1: Binary Data Types**

Name	Clause defined	Content type

## 6.1.7 Error Handling

### 6.1.7.1 General

For the Nmbsf\_MBSUserService API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Nmbsf\_MBSUserService API.

### 6.1.7.2 Protocol Errors

No specific procedures for the Nmbsf\_MBSUserService service are specified.

### 6.1.7.3 Application Errors

The application errors defined for the Nmbsf\_MBSUserService service are listed in Table 6.1.7.3-1.

**Table 6.1.7.3-1: Application errors**

Application Error	HTTP status code	Description

## 6.1.8 Feature negotiation

The optional features in table 6.1.8-1 are defined for the Nmbsf\_MBSUserService API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

**Table 6.1.8-1: Supported Features**

Feature number	Feature Name	Description

## 6.1.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Nmbsf\_MBSUserService API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Nmbsf\_MBSUserService API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

**NOTE:** When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Nmbsf\_MBSUserService service.

The Nmbsf\_MBSUserService API defines a single scope "nmbsf-mbs-us" for the entire service, and it does not define any additional scopes at resource or operation level.

## 6.2 Nmbsf\_MBSUserDataIngestSession Service API

### 6.2.1 Introduction

The Nmbsf\_MBSUserDataIngestSession service shall use the Nmbsf\_MBSUserDataIngestSession API.

The API URI of the Nmbsf\_MBSUserDataIngestSession API shall be:

**{apiRoot}/<apiName>/<apiVersion>**

The request URIs used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

**{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>**

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].
- The <apiName> shall be "nmbsf-mbs-ud-ingest".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 6.2.3.

### 6.2.2 Usage of HTTP

#### 6.2.2.1 General

HTTP/2, IETF RFC 7540 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Nmbsf\_MBSUserDataIngestSession API is contained in Annex A.3.

#### 6.2.2.2 HTTP standard headers

##### 6.2.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

##### 6.2.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".


"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 7807 [13].

##### 6.2.2.3 HTTP custom headers

The mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [4] shall be supported, and the optional HTTP custom header fields specified in clause 5.2.3.3 of 3GPP TS 29.500 [4] may be supported.

## 6.2.3 Resources

### 6.2.3.1 Overview

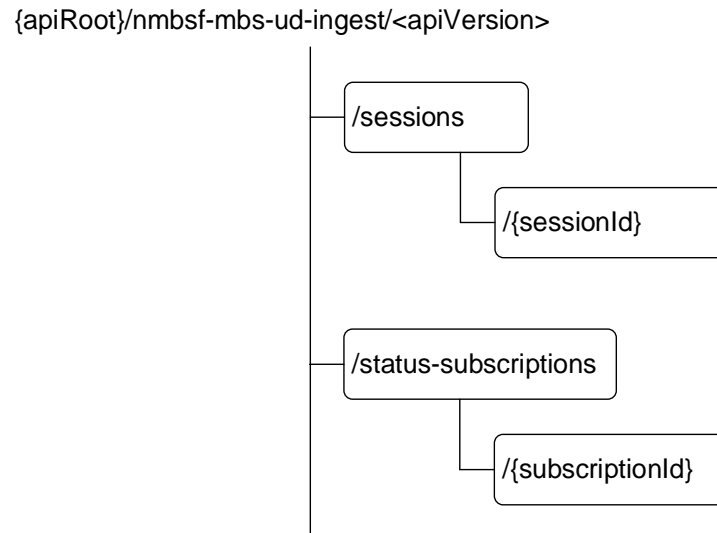

**Figure 6.2.3.1-1: Resource URI structure of the Nmbsf\_MBSUserDataIngestSession API**

Table 6.2.3.1-1 provides an overview of the resources and applicable HTTP methods.



Table 6.2.3.1-1: Resources and methods overview

Resource purpose/name	Resource URI (relative path after API URI)	HTTP method or custom operation	Description (service operation)
MBS User Data Ingest Sessions	/sessions	GET	Retrieve all the active MBS User Data Ingest Sessions managed by the MBSF.
		POST	Request the creation of a new MBS User Data Ingest Session.
Individual MBS User Data Ingest Session	/sessions/{sessionId}	GET	Retrieve an existing MBS User Data Ingest Session managed by the MBSF.
		PUT	Update an existing MBS User Data Ingest Session managed by the MBSF.
		PATCH	Modify an existing MBS User Data Ingest Session managed by the MBSF.
		DELETE	Delete an existing MBS User Data Ingest Session managed by the MBSF.
MBS User Data Ingest Session Status Subscriptions	/status-subscriptions	GET	Retrieve all the active MBS User Data Ingest Sessions Status Subscriptions managed by the MBSF.
		POST	Request the creation of a new MBS User Data Ingest Session Status Subscription.
Individual MBS User Data Ingest Session Status Subscription	/status-subscriptions/{subscriptionId}	GET	Retrieve an existing MBS User Data Ingest Session Status Subscription managed by the MBSF.
		PUT	Update an existing MBS User Data Ingest Session Status Subscription managed by the MBSF.
		PATCH	Modify an existing MBS User Data Ingest Session Status Subscription managed by the MBSF.
		DELETE	Delete an existing MBS User Data Ingest Session Status Subscription managed by the MBSF.

### 6.2.3.2 Resource: MBS User Data Ingest Sessions

#### 6.2.3.2.1 Description

This resource represents the collection of MBS User Data Ingest Sessions managed by the MBSF.

#### 6.2.3.2.2 Resource Definition

Resource URI: {apiRoot}/nmbf-mbs-ud-ingest/<apiVersion>/sessions

This resource shall support the resource URI variables defined in table 6.2.3.2.2-1.

Table 6.2.3.2.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 6.2.1.

## 6.2.3.2.3 Resource Standard Methods

## 6.2.3.2.3.1 GET

The GET method allows an NF service consumer (e.g. AF, NEF) to retrieve all the active MBS User Data Ingest Sessions managed by the MBSF.

This method shall support the URI query parameters specified in table 6.2.3.2.3.1-1.

**Table 6.2.3.2.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.2.3.1-2 and the response data structures and response codes specified in table 6.2.3.2.3.1-3.

**Table 6.2.3.2.3.1-2: Data structures supported by the GET Request Body on this resource**

Data type	P	Cardinality	Description
n/a			

**Table 6.2.3.2.3.1-3: Data structures supported by the GET Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
array(MBSUserDat alngSession)	M	1..N	200 OK	Successful case. All the active MBS User Data Ingest Sessions managed by the MBSF are returned.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
NOTE: The mandatory HTTP error status code for the HTTP GET method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.2.3.2.3.1-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected

**Table 6.2.3.2.3.1-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected

## 6.2.3.2.3.2 POST

The POST method allows an NF service consumer (e.g. AF, NEF) to request the creation of a new MBS User Data Ingest Session including one or several subordinate MBS Distribution Session(s).

This method shall support the URI query parameters specified in table 6.2.3.2.3.2-1.

**Table 6.2.3.2.3.2-1: URI query parameters supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.2.3.2-2 and the response data structures and response codes specified in table 6.2.3.2.3.2-3.

**Table 6.2.3.2.3.2-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
MBSUserDataIngest Session	M	1	Contains the parameters to request the creation of a new MBS User Data Ingest Session.

**Table 6.2.3.2.3.2-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngest Session	M	1	201 Created	Successful case. The MBS User Data Ingest Session is successfully created and a representation of the created "Individual MBS User Data Ingest Session" resource is returned.  An HTTP "Location" header that contains the resource URI of the created Individual MBS User Data Ingest Session resource is also included.
NOTE: The mandatory HTTP error status code for the HTTP POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.2.3.2.3.2-4: Headers supported by the 201 response code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/nmbsf-mbs-ud-ingest/<apiVersion>/sessions/{sessionId}

#### 6.2.3.2.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

### 6.2.3.3 Resource: Individual MBS User Data Ingest Session

#### 6.2.3.3.1 Description

This resource represents an "Individual MBS User Data Ingest Session" resource managed by the MBSF.

#### 6.2.3.3.2 Resource Definition

Resource URI: {apiRoot}/nmbsf-mbs-ud-ingest/<apiVersion>/sessions/{sessionId}

This resource shall support the resource URI variables defined in table 6.2.3.3.2-1.

**Table 6.2.3.3.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 6.2.1.
sessionId	string	Represents the unique identifier of the Individual MBS User Data Ingest Session resource, assigned by the MBSF.

### 6.2.3.3.3 Resource Standard Methods

#### 6.2.3.3.3.1 GET

The GET method allows an NF service consumer (e.g. AF, NEF) to retrieve an existing "Individual MBS User Data Ingest Session" resource managed by the MBSF.

This method shall support the URI query parameters specified in table 6.2.3.3.3.1-1.

**Table 6.2.3.3.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.3.3.1-2 and the response data structures and response codes specified in table 6.2.3.3.3.1-3.

**Table 6.2.3.3.3.1-2: Data structures supported by the GET Request Body on this resource**

Data type	P	Cardinality	Description
n/a			

**Table 6.2.3.3.3.1-3: Data structures supported by the GET Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngestSession	M	1	200 OK	Successful case. The requested "Individual MBS User Data Ingest Session" resource is successfully returned.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
NOTE: The mandatory HTTP error status code for the HTTP GET method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.2.3.3.3.1-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected

**Table 6.2.3.3.3.1-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected

## 6.2.3.3.3.2 PUT

The PUT method allows an NF service consumer (e.g. AF, NEF) to update an existing Individual MBS User Data Ingest Session resource managed by the MBSF.

This method shall support the URI query parameters specified in table 6.2.3.3.3.2-1.

**Table 6.2.3.3.3.2-1: URI query parameters supported by the PUT method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.3.3.2-2 and the response data structures and response codes specified in table 6.2.3.3.3.2-3.

**Table 6.2.3.3.3.2-2: Data structures supported by the PUT Request Body on this resource**

Data type	P	Cardinality	Description
MBSUserDataIngestSession	M	1	Contains the updated representation of the existing Individual MBS User Data Ingest Session resource that is to be updated.

**Table 6.2.3.3.3.2-3: Data structures supported by the PUT Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngestSession	M	1	200 OK	Successful case. The concerned Individual MBS User Data Ingest Session resource is successfully updated and a representation of the updated resource is returned to the NF service consumer in the response body.
n/a			204 No Content	Successful case. The concerned Individual MBS User Data Ingest Session resource is successfully updated and no content is returned in the response body.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
NOTE: The mandatory HTTP error status code for the HTTP PUT method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.2.3.3.3.2-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**Table 6.2.3.3.3.2-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

## 6.2.3.3.3.3 PATCH

The PATCH method allows an NF service consumer (e.g. AF, NEF) to modify an existing "Individual MBS User Data Ingest Session" resource managed by the MBSF.

This method shall support the URI query parameters specified in table 6.2.3.3.3.3-1.

**Table 6.2.3.3.3.3-1: URI query parameters supported by the PATCH method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.3.3.3-2 and the response data structures and response codes specified in table 6.2.3.3.3.3-3.

**Table 6.2.3.3.3.3-2: Data structures supported by the PATCH Request Body on this resource**

Data type	P	Cardinality	Description
MBSUserDataIngSessionPatch	M	1	Contains the parameters to request the modification of an existing "Individual MBS User Data Ingest Session" resource.

**Table 6.2.3.3.3.3-3: Data structures supported by the PATCH Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngSession	M	1	200 OK	Successful case. The concerned "Individual MBS User Data Ingest Session" resource is successfully modified and a representation of the updated resource is returned to the NF service consumer in the response body.
n/a			204 No Content	Successful case. The concerned "Individual MBS User Data Ingest Session" resource is successfully modified and no content is returned in the response body.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
NOTE: The mandatory HTTP error status code for the HTTP PATCH method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.2.3.3.3.3-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**Table 6.2.3.3.3.3-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**6.2.3.3.3.4 DELETE**

The DELETE method allows an NF service consumer (e.g. AF, NEF) to delete an existing "Individual MBS User Data Ingest Session" resource managed by the MBSF.

This method shall support the URI query parameters specified in table 6.2.3.3.3.4-1.

**Table 6.2.3.3.3.4-1: URI query parameters supported by the DELETE method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.3.3.4-2 and the response data structures and response codes specified in table 6.2.3.3.3.4-3.

**Table 6.2.3.3.3.4-2: Data structures supported by the DELETE Request Body on this resource**

Data type	P	Cardinality	Description
n/a			

**Table 6.2.3.3.3.4-3: Data structures supported by the DELETE Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case. The concerned "Individual MBS User Data Ingest Session" resource is successfully deleted.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.

NOTE: The mandatory HTTP error status code for the HTTP DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.

**Table 6.2.3.3.3.4-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**Table 6.2.3.3.3.4-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

#### 6.2.3.3.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

#### 6.2.3.4 Resource: MBS User Data Ingest Session Status Subscriptions

##### 6.2.3.4.1 Description

This resource represents the collection of MBS User Data Ingest Session Status Subscriptions managed by the MBSF.

##### 6.2.3.4.2 Resource Definition

Resource URI: {apiRoot}/nmbsf-mbs-ud-ingest/<apiVersion>/status-subscriptions

This resource shall support the resource URI variables defined in table 6.2.3.4.2-1.

**Table 6.2.3.4.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 6.2.1.

#### 6.2.3.4.3 Resource Standard Methods

##### 6.2.3.4.3.1 GET

The GET method allows an NF service consumer (e.g. AF, NEF) to retrieve all the active MBS User Data Ingest Session Status Subscriptions managed by the MBSF.

This method shall support the URI query parameters specified in table 6.2.3.4.3.1-1.

**Table 6.2.3.4.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.4.3.1-2 and the response data structures and response codes specified in table 6.2.3.4.3.1-3.

**Table 6.2.3.4.3.1-2: Data structures supported by the GET Request Body on this resource**

Data type	P	Cardinality	Description
n/a			



**Table 6.2.3.4.3.1-3: Data structures supported by the GET Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
array(MBSUserDataIngestStatSubsc)	M	1..N	200 OK	Successful case. All the active MBS User Data Ingest Session Status Subscriptions managed by the MBSF are returned.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
NOTE: The mandatory HTTP error status code for the HTTP GET method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.2.3.4.3.1-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected

**Table 6.2.3.4.3.1-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected

#### 6.2.3.4.3.2 POST

The POST method allows an NF service consumer (e.g. AF, NEF) to request the creation of a new MBS User Data Ingest Session Status Subscription.

This method shall support the URI query parameters specified in table 6.2.3.4.3.2-1.

**Table 6.2.3.4.3.2-1: URI query parameters supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.4.3.2-2 and the response data structures and response codes specified in table 6.2.3.4.3.2-3.

**Table 6.2.3.4.3.2-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
MBSUserDataIngestStatSubsc	M	1	Contains the parameters to request the creation of a new MBS User Data Ingest Session Status Subscription.

**Table 6.2.3.4.3.2-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngestStatSubsc	M	1	201 Created	Successful case. The MBS User Data Ingest Session Status Subscription is successfully created and a representation of the created "Individual MBS User Data Ingest Session Status Subscription" resource is returned.  An HTTP "Location" header that contains the resource URI of the created "Individual MBS User Data Ingest Session Status Subscription" resource shall also be included.
NOTE: The mandatory HTTP error status code for the HTTP POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.2.3.4.3.2-4: Headers supported by the 201 response code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/nmbfsf-mbs-ud-ingest/<apiVersion>/status-subscriptions/{subscriptionId}

#### 6.2.3.4.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

#### 6.2.3.5 Resource: Individual MBS User Data Ingest Session Status Subscription

##### 6.2.3.5.1 Description

This resource represents an "Individual MBS User Data Ingest Session Status Subscription" resource managed by the MBSF.

##### 6.2.3.5.2 Resource Definition

Resource URI: {apiRoot}/nmbfsf-mbs-ud-ingest/<apiVersion>/status-subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 6.2.3.5.2-1.

**Table 6.2.3.5.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 6.2.1.
subscriptionId	string	Represents the unique identifier of the Individual MBS User Data Ingest Session Status Subscription resource, assigned by the MBSF.

##### 6.2.3.5.3 Resource Standard Methods

###### 6.2.3.5.3.1 GET

The GET method allows an NF service consumer (e.g. AF, NEF) to retrieve an existing "Individual MBS User Data Ingest Session Status Subscription" resource managed by the MBSF.

This method shall support the URI query parameters specified in table 6.2.3.5.3.1-1.

**Table 6.2.3.5.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.5.3.1-2 and the response data structures and response codes specified in table 6.2.3.5.3.1-3.

**Table 6.2.3.5.3.1-2: Data structures supported by the GET Request Body on this resource**

Data type	P	Cardinality	Description
n/a			

**Table 6.2.3.5.3.1-3: Data structures supported by the GET Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngestStatusSubsc	M	1	200 OK	Successful case. The requested "Individual MBS User Data Ingest Session Status Subscription" resource is returned.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
NOTE: The mandatory HTTP error status code for the HTTP GET method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.2.3.5.3.1-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected

**Table 6.2.3.5.3.1-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected

### 6.2.3.5.3.2 PUT

The PATCH method allows an NF service consumer (e.g. AF, NEF) to update an existing "Individual MBS User Data Ingest Session Status Subscription" resource managed by the MBSF.

This method shall support the URI query parameters specified in table 6.2.3.5.3.2-1.

**Table 6.2.3.5.3.2-1: URI query parameters supported by the PUT method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.5.3.2-2 and the response data structures and response codes specified in table 6.2.3.5.3.2-3.

**Table 6.2.3.5.3.2-2: Data structures supported by the PUT Request Body on this resource**

Data type	P	Cardinality	Description
MBSUserDataIngStatSubsc	M	1	Contains the updated representation of the existing "Individual MBS User Data Ingest Session Status Subscription" resource that is to be updated.

**Table 6.2.3.5.3.2-3: Data structures supported by the PUT Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngStatSubsc	M	1	200 OK	Successful case. The concerned "Individual MBS User Data Ingest Session Status Subscription" resource is successfully updated and a representation of the updated resource is returned to the NF service consumer in the response body.
n/a			204 No Content	Successful case. The concerned "Individual MBS User Data Ingest Session Status Subscription" resource is successfully updated and no content is returned in the response body.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
NOTE: The mandatory HTTP error status code for the HTTP PUT method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.2.3.5.3.2-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**Table 6.2.3.5.3.2-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

### 6.2.3.5.3.3 PATCH

The PATCH method allows an NF service consumer (e.g. AF, NEF) to modify an existing "Individual MBS User Data Ingest Session Status Subscription" resource managed by the MBSF.

This method shall support the URI query parameters specified in table 6.2.3.5.3.3-1.

**Table 6.2.3.3.2-1: URI query parameters supported by the PATCH method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.5.3.3-2 and the response data structures and response codes specified in table 6.2.3.5.3.3-3.

**Table 6.2.3.5.3.3-2: Data structures supported by the PATCH Request Body on this resource**

Data type	P	Cardinality	Description
MBSUserDataIngStatSubscPatch	M	1	Contains the parameters to request the modification of an existing "Individual MBS User Data Ingest Session Status Subscription" resource.

**Table 6.2.3.5.3.3-3: Data structures supported by the PATCH Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
MBSUserDataIngStatSubsc	M	1	200 OK	Successful case. The concerned "Individual MBS User Data Ingest Session Status Subscription" resource is successfully modified and a representation of the updated resource is returned to the NF service consumer in the response body.
n/a			204 No Content	Successful case. The concerned "Individual MBS User Data Ingest Session Status Subscription" resource is successfully modified and no content is returned in the response body.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
NOTE: The mandatory HTTP error status code for the HTTP PATCH method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.2.3.5.3.3-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**Table 6.2.3.5.3.3-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

#### 6.2.3.5.3.4 DELETE

The DELETE method allows an NF service consumer (e.g. AF, NEF) to delete an existing "Individual MBS User Data Ingest Session Status Subscription" resource managed by the MBSF.

This method shall support the URI query parameters specified in table 6.2.3.5.3.4-1.

**Table 6.2.3.5.3.4-1: URI query parameters supported by the DELETE method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 6.2.3.5.3.4-2 and the response data structures and response codes specified in table 6.2.3.5.3.4-3.

**Table 6.2.3.5.3.4-2: Data structures supported by the DELETE Request Body on this resource**

Data type	P	Cardinality	Description
n/a			

**Table 6.2.3.5.3.4-3: Data structures supported by the DELETE Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case. The concerned "Individual MBS User Data Ingest Session Status Subscription" resource is successfully deleted.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MBSF (service) instance.
NOTE: The mandatory HTTP error status code for the HTTP DELETE method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 6.2.3.5.3.4-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**Table 6.2.3.5.3.2-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative MBSF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

#### 6.2.3.5.4 Resource Custom Operations

There are no resource custom operations defined for this resource in this release of the specification.

### 6.2.4 Custom Operations without associated resources

There are no custom operations without associated resources defined for this API in this release of the specification.

## 6.2.5 Notifications

### 6.2.5.1 General

Notifications shall comply to clause 6.2 of 3GPP TS 29.500 [4] and clause 4.6.2.3 of 3GPP TS 29.501 [5].

Table 6.2.5.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
MBS User Data Ingest Session Status Notification	{notifUri}	POST	This operation enables the MBSF to notify the NF service consumer (e.g. AF, NEF) on status changes of an MBS User Data Ingest Session.

## 6.2.5.2 MBS User Data Ingest Session Status Notification

### 6.2.5.2.1 Description

The MBS User Data Ingest Session Status Notification is used by the MBSF to notify the NF service consumer (e.g. AF, NEF) about event(s) related to an MBS User Data Ingest Session.

### 6.2.5.2.2 Target URI

The Callback URI "{notifUri}" shall be used with the callback URI variables defined in table 6.2.5.2.2-1.

Table 6.2.5.2.2-1: Callback URI variables

Name	Definition
notifUri	String formatted as URI with the Callback URI towards which the MBS User Data Ingest Session Status Notifications should be sent.

### 6.2.5.2.3 Standard Methods

#### 6.2.5.2.3.1 POST

This method shall support the request data structures specified in table 6.2.5.2.3.1-1 and the response data structures and response codes specified in table 6.2.5.2.3.1-2.

Table 6.2.5.2.3.1-1: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
MBSUserDataIngStatNotif	M	1	Represents an MBS User Data Ingest Session Status Notification.

Table 6.2.5.2.3.1-2: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The MBS User Data Ingest Session Status Notification is successfully received.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF service consumer (service) instance where the notification should be sent.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF service consumer (service) instance where the notification should be sent.

NOTE: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.

**Table 6.2.5.2.3.1-3: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the notification request is redirected

**Table 6.2.5.2.3.1-4: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the notification request is redirected

## 6.2.6 Data Model

### 6.2.6.1 General

This clause specifies the application data model supported by the Nmbsf\_MBSUserDataIngestSession API.

Table 6.2.6.1-1 specifies the data types defined for the Nmbsf\_MBSUserDataIngestSession service based interface protocol.



**Table 6.2.6.1-1: Nmbsf\_MBSUserDataIngestSession specific Data Types**

Data type	Clause defined	Description	Applicability
AddFecParams	6.2.6.2.15	Represents additional scheme-specific parameters for AL-FEC configuration.	
DistributionMethod	6.2.6.3.3	Represents the MBS Distribution method.	
Event	6.2.6.3.4	Represents MBS User Data Ingest Session Status events.	
EventNotification	6.2.6.2.10	Represents an MBS User Data Ingest Session Status event notification related information.	
FECConfig	6.2.6.2.14	Represents FEC configuration information.	
MBSDistSessionAnmt	6.2.6.2.12	Represents the set of MBS Distribution Session Announcements currently associated with this MBS User Service Announcement.	
MBSDistributionSessionInfo	6.2.6.2.3	Represents MBS Distribution Session information.	
MBSUserDataIngestSession	6.2.6.2.2	Represents MBS User Data Ingest Session information.	
MBSUserDataIngestSessionPatch	6.2.6.2.4	Represents the requested modification to an MBS User Data Ingest Session.	
MBSUserDataIngestStatNotif	6.2.6.2.9	Represents an MBS User Data Ingest Session Status Notification.	
MBSUserDataIngestStatSubsc	6.2.6.2.7	Represents an MBS User Data Ingest Session Status Subscription.	
MBSUserDataIngestStatSubscPatch	6.2.6.2.16	Represents the requested modifications to an MBS User Data Ingest Session Status Subscription.	
MBSUserServAnmt	6.2.6.2.11	Represents the MBS User Service Announcement currently associated with the MBS User Data Ingest Session.	
ObjectDistMethAnmtInfo	6.2.6.2.13	Represents MBS Distribution Session Announcement parameters for Object Distribution Method.	
ObjectDistrMethInfo	6.2.6.2.5	Represents additional MBS Distribution Session parameters for Object Distribution Method.	
PacketDistrMethInfo	6.2.6.2.6	Represents additional MBS Distribution Session parameters for Packet Distribution Method.	
SubscribedEvent	6.2.6.2.8	Represents a subscribed MBS User Data Ingest Session Status event and the related information.	

Table 6.2.6.1-2 specifies data types re-used by the Nmbsf\_MBSUserDataIngestSession service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Nmbsf\_MBSUserDataIngestSession service based interface.

Table 6.2.6.1-2: Nmbsf\_MBSUserDataIngestSession re-used Data Types

Data type	Reference	Comments	Applicability
BitRate	3GPP TS 29.571 [17]	Represents Bit Rate.	
MbsServInfo	3GPP TS 29.571 [17]	Represents MBS Service Information.	
ExternalMbsServiceArea	3GPP TS 29.571 [17]	Represents an external MBS Service Area.	
DateTime	3GPP TS 29.122 [18]	Represents an absolute date time with the format "date-time", as defined in OpenAPI Specification [6].	
DistSessionState	3GPP TS 29.581 [19]	Represents state of an MBS Distribution Session.	
MbsFsald	3GPP TS 29.571 [17]	Represents an MBS Frequency Selection Area ID, for a broadcast MBS session.	
MbsServiceArea	3GPP TS 29.571 [17]	Represents an MBS service area.	
MbsServiceInfo	3GPP TS 29.571 [17]	Represents the MBS Service Information.	
MbsSessionId	3GPP TS 29.571 [17]	Represents an MBS Session Identifier.	
MbStfIngestAddr	3GPP TS 29.581 [19]	Represents MBSTF ingest endpoint addresses.	
ObjAcquisitionMethod	3GPP TS 29.581 [19]	Represents the Object Acquisition Method.	
ObjDistributionOperatingMode	3GPP TS 29.581 [19]	Represents the operation mode for an Object distribution method.	
PacketDelBudget	3GPP TS 29.571 [17]	Represents Unsigned integer indicating Packet Delay Budget expressed in milliseconds.	
ServiceNameDescription	Clause 6.1.6.2.3	Represents a set of per language service Name and/or service description.	
PktDistributionOperatingMode	3GPP TS 29.581 [19]	Represents the operation mode for a Packet distribution method.	
PktIngestMethod	3GPP TS 29.581 [19]	Represents packets ingest method.	
TimeWindow	3GPP TS 29.122 [18]	Represents a Time Window.	
Tmgi	3GPP TS 29.571 [17]	Represents Temporary Mobile Group Identity.	
Uri	3GPP TS 29.571 [17]	Represents Uniform Resource Identifier.	
SupportedFeatures	3GPP TS 29.571 [17]	Used to negotiate the applicability of optional features.	

## 6.2.6.2 Structured data types

### 6.2.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

## 6.2.6.2.2 Type: MBSUserDataIngSession

Table 6.2.6.2.2-1: Definition of type MBSUserDataIngSession

Attribute name	Data type	P	Cardinality	Description	Applicability
mbsDistSessInfos	map(MBSDistributionSessionInfo)	M	1..N	Represents one or more MBS Distribution Session(s) composing the MBS User Data Ingest Session.  The key of the map shall be set to the value of the "mbsDistSessionId" attribute of the MBSDistributionSessionInfo data structure encoding the corresponding map entry.	
actPeriods	array(TimeWindow)	O	1..N	Represents periods of time during which the MBS User Data Ingest Session is active in the MBS System. If omitted, the session shall stay active until it is explicitly terminated by the AF.	
mbsUserServAnmt	MBSUserServAnmt	O	0..1	Represents the MBS User Service Announcement currently associated with the MBS User Data Ingest Session.  This attribute may only be present in an HTTP POST/PATCH response to an MBS User Data Ingest Session creation/modification request and only if all the constituent MBS Distribution Sessions are in the "ESTABLISHED" or "ACTIVE" state and the "PASSED_BACK" service announcement mode is provisioned within the service announcement modes supported for the parent Individual MBS User Service identified by the "mbsUserServId" attribute.	
mbsUserServId	string	M	1	Represents the Identifier of the parent MBS User Service.	
suppFeat	SupportedFeatures	C	0..1	Used to negotiate the supported optional features of the API as described in clause 6.2.8.  This attribute shall be present only in an HTTP POST/PUT request or response and if feature negotiation needs to take place.	

6.2.6.2.3 Type: MBSDistributionSessionInfo

**Table 6.2.6.2.3-1: Definition of type MBSDistributionSessionInfo**

Attribute name	Data type	P	Cardinality	Description	Applicability
mbsDistSessionId	string	C	0..1	Represents the identifier of the MBS Distribution Session.  This attribute shall only be present in the response to an MBS User Data Ingest Session creation request or a subsequent MBS User Data Ingest Session update/modification request.	
mbsSessionId	MbsSessionId	O	0..1	Represents the identifier of the MBS Session to which the MBS Distribution Session is related.  It can be set to the Temporary Mobile Group Identity (TMGI) or Source-Specific Multicast (SSM) IP address of the MBS Session corresponding to this MBS Distribution Session.  When this attribute is absent or present and contains a source specific multicast address and the "locationDependent" attribute is present and set to "true", then: <ul style="list-style-type: none"> <li>- TMGI allocation shall be performed by the MBSF; and</li> <li>- This attribute shall be present in the HTTP POST response to the corresponding MBS User Data Ingest session creation request and contain the allocated TMGI value.</li> </ul>	
mbsServInfo	MbsServiceInfo	O	0..1	Contains the MBS Service Information for the MBS session.	
maxContBitRate	BitRate	M	1	Represents the maximum bit rate for content in this MBS Distribution Session.	
maxContDelay	PacketDelBudget	O	0..1	Represents the maximum end-to-end distribution delay that is tolerated for content in this MBS Distribution Session.	
distrMethod	DistributionMethod	M	1	Represents the distribution method for this MBS Distribution Session.	
fecConfig	FECConfig	O	0..1	Represents the AL-FEC (Application Level – Forward Error Correction) configuration information to be used by the MBSTF to protect this MBS Distribution Session.	
objDistrInfo	ObjectDistrMethInfo	C	0..1	Represents the MBS Distribution Session parameters for Object Distribution Method.  This attribute shall only be present when the "distrMethod" attribute value is set as "OBJECT".	

pckDistrInfo	PacketDistrMethInfo	C	0..1	<p>Represents the MBS Distribution Session parameters for Packet Distribution Method.</p> <p>This attribute shall only be present when the "distrMethod" attribute is set to "PACKET".</p>
trafficMarkingInfo	string	O	0..1	<p>Contains traffic marking information (e.g. a Differentiated Services Code Point) to be applied by the MBSTF to outgoing traffic.</p> <p>This attribute shall be encoded as two octet string in hexadecimal representation. The first octet shall contain the DSCP value in the IPv4 Type-of-Service or the IPv6 Traffic-Class field, and the second octet shall contain the ToS/Traffic Class mask field, which shall be set to "0xFC".</p>
mbsDistSessState	DistSessionState	C	0..1	<p>Represents the state of the MBS Distribution Session.</p> <p>This attribute shall only be present in the HTTP POST/PUT/PATCH response to the corresponding MBS User Data Ingest session creation or update/modification request.</p>
tgtServAreas	MbsServiceArea	O	0..1	<p>Represents the set of target service area(s) constituting the MBS Service Area of the MBS Distribution Session.</p> <p>This attribute may be present only in the case of a trusted/internal AF (i.e. MBS Application Provider).</p>
extTgtServAreas	ExternalMbsServiceArea	O	0..1	<p>Represents the set of target service area(s) constituting the external MBS Service Area (i.e. list of geographical area(s) or civic address(es)) of the MBS Distribution Session.</p> <p>This attribute may be present only in the case of an untrusted/external AF (MBS Application Provider).</p>
mbsFSAId	MbsFsald	O	0..1	<p>Represents MBS Frequency Selection Assistance information corresponding to this MBS Distribution Session.</p> <p>This attribute may be included only if the parent MBS User Service is of Broadcast service type.</p>

locationDependent	boolean	O	0..1	<p>Represents an indication that this MBS Distribution Session belongs to a location-dependent MBS.</p> <p>This attribute shall be:</p> <ul style="list-style-type: none"> <li>- set to "true" to indicate that the MBS Distribution Session belongs to a location-dependent MBS; or</li> <li>- set to "false" to indicate that the MBS Distribution Session does not belong to a location-dependent MBS.</li> </ul> <p>The default value is "false", if omitted.</p>	
multiplexedServFlag	boolean	O	0..1	<p>Represents an indication that this MBS Distribution Session belongs to a multiplex, i.e. forms part of a set of MBS Distribution Sessions under the same parent MBS User Data Ingest Session with identical or empty sets of target service areas and multiplexed onto the same MBS Session at the MB-SMF.</p> <p>This attribute shall be:</p> <ul style="list-style-type: none"> <li>- set to "true" to indicate that the MBS Distribution Session belongs to a multiplex; or</li> <li>- set to "false" to indicate that the MBS Distribution Session does not belong to a multiplex.</li> </ul> <p>The default value is "false", if omitted.</p>	
restrictedFlag	boolean	O	0..1	<p>Represents an indication that this MBS Distribution Session is not open to any UE, i.e. restricted to a set of UEs according to their MBS related subscription information.</p> <p>This attribute may be included only if the parent MBS User Service is of Multicast service type.</p> <p>This attribute shall be:</p> <ul style="list-style-type: none"> <li>- set to "true" to indicate that this MBS Distribution Session is restricted to a set of UE(s); or</li> <li>- set to "false" to indicate that this MBS Distribution Session is open to any UE.</li> </ul> <p>The default value is "false", if omitted.</p>	

## 6.2.6.2.4 Type: MBSUserDataIngSessionPatch

**Table 6.2.6.2.4-1: Definition of type MBSUserDataIngSessionPatch**

Attribute name	Data type	P	Cardinality	Description	Applicability
actPeriods	array(TimeWindow)	O	1..N	Represents periods of time during which the MBS User Data Ingest Session is active in the MBS System.	
mbsDistSessInfos	map(MBSDistributionSessionInfo)	O	1..N	Contains the requested modifications to one or more MBS Distribution Session(s) composing the MBS User Data Ingest Session.	

## 6.2.6.2.5 Type: ObjectDistrMethInfo

**Table 6.2.6.2.5-1: Definition of type ObjectDistrMethInfo**

Attribute name	Data type	P	Cardinality	Description	Applicability
operatingMode	ObjDistributionOperatingMode	M	1	Represents the operating mode for the Object distribution method.	
objAcqMethod	ObjAcquisitionMethod	M	1	Represents the object(s) acquisition method.	
objAcqIds	array(Uri)	M	1..N	Represents the object(s) to be ingested and distributed by the MBSTF during this MBS Distribution Session.	
objIngUri	Uri	O	0..1	Represents a prefix substituted by the MBSTF with the Object distribution base URL prior to the distribution of the ingested objects.  When the "objAcqMethod" is set to "PULL", this attribute is provided by the AF and present in the creation and/or update/modification of the corresponding MBS User Data Ingest Session.  When the "objAcqMethod" is set to "PUSH", this attribute is provided by the MBSF and present in the response to the creation and/or update/modification request of the corresponding MBS User Data Ingest Session.	
objDistrUri	Uri	O	0..1	Represents a prefix substituted by the MBSTF in place of the Object ingest base URL prior to the distribution of the ingested objects.	
objRepairUri	Uri	O	0..1	Represents the object repair base URI. It contains a URI prefix substituted by the MBSTF Client in place of the Object distribution base URI when repairing objects not received completely intact from this MBS Distribution Session. The value shall point to the MBS AS.  This attribute may only be present in responses to MBS User Data Ingest Session creation/update/modification requests.	



## 6.2.6.2.6 Type: PacketDistrMethInfo

Table 6.2.6.2.6-1: Definition of type PacketDistrMethInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
operatingMode	PktDistributionOperatingMode	M	1	Contains the desired operating mode for the Packet distribution method.	
pckIngMethod	PktIngestMethod	M	1	Represents the packets ingest method, i.e. unicast ingest or multicast ingest.	
ingEndpointAddresses	MbStfIngestAddr	M	1	<p>The endpoint addresses used by the AF (e.g. MBS Application Provider) and the MBSTF to establish a connection at reference point Nmb8 prior to the commencement of the MBS User Data Ingest Session.</p> <p>In the case of Proxy mode, this shall be the Source-Specific Multicast (SSM) endpoint addresses (including the source IP address, destination multicast group address and destination UDP port) and provided either by the AF (e.g. MBS Application Provider) or by the MBSF.</p> <p>In the case of Forward-only mode, this shall be the IP addresses and UDP port numbers at the source and destination ends of the content ingest tunnel, and provided respectively by the AF (e.g. MBS Application Provider) and the MBSTF.</p>	

## 6.2.6.2.7 Type MBSUserDataIngestStatSubsc

Table 6.2.6.2.7-1: Definition of type MBSUserDataIngestStatSubsc

Attribute name	Data type	P	Cardinality	Description	Applicability
mbsIngSessionId	string	M	1	Represents the identifier of the MBS User Data Ingest Session to which the subscription is related.	
eventsubscs	array(SubscribedEvent)	M	1..N	Represents the list of subscribed MBS User Data Ingest Session Status event(s).	
notifUri	Uri	M	1	Represents the notification URI to be used for MBS User Data Ingest Session Status event(s) reporting.	

## 6.2.6.2.8 Type SubscribedEvent

Table 6.2.6.2.8-1: Definition of type SubscribedEvent

Attribute name	Data type	P	Cardinality	Description	Applicability
statusEvent	Event	M	1..N	Represents the subscribed MBS User Data Ingest Session Status event.	
mbsDistSessionId	string	C	0..1	Represents the identifier for the MBS Distribution Session to which the subscribed MBS User Data Ingest Session Status event is related.  This attribute shall be provided if the subscribed event is related to a particular MBS Distribution Session within the concerned Individual MBS User Data Ingest Session.	

## 6.2.6.2.9 Type MBSUserDataIngestStatNotif

Table 6.2.6.2.9-1: Definition of type MBSUserDataIngestStatNotif

Attribute name	Data type	P	Cardinality	Description	Applicability
mbsIngestSessionId	string	M	1	Represents the identifier for the MBS User Data Ingest Session to which the notification is related .	
eventNotifs	array(EventNotification)	M	1..N	Represents the set of reported MBS User Data Ingest Session Status event(s) and the related information.	

## 6.2.6.2.10 Type EventNotification

Table 6.2.6.2.10-1: Definition of type EventNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
statusEvent	Event	M	1.	Represents the reported MBS User Data Ingest Session Status event.	
mbsDistSessionId	string	C	0..1	Represents the identifier for the MBS Distribution Session to which the reported event is related.  This attribute shall be provided if the reported event relates to a particular MBS Distribution Session within the concerned Individual MBS User Data Ingest Session.	
statusAddInfo	string	O	0..1	Represents additional information on the reported MBS User Data Ingest Session Status event within the "statusEvent" attribute.	
timeStamp	DateTime	M	1	Represents the time at which the MBS User Data Ingest Session Status event is observed.	

## 6.2.6.2.11 Type MBSUserServAnmt

Table 6.2.6.2.11-1: Definition of type MBSUserServAnmt

Attribute name	Data type	P	Cardinality	Description	Applicability
extServiceIds	array(string)	M	1..N	Represents the external service identifier(s) of this MBS User Service.	
servClass	string	M	1	Represents the class of the MBS User Service, expressed as a term identifier from the OMA BCAS T Service Class Registry [19].	
startTime	DateTime	O	0..1	Represents the start time from which this MBS User Service Announcement is valid.  If not present, the announcement is already valid.	
endTime	DateTime	O	0..1	Represents the end time after which this MBS User Service Announcement is no longer valid.  If not present, the announcement is valid indefinitely.	
servNameDescs	array(ServiceNamedescription)	M	1..N	Contains one or several set(s) of per language distinguishing service name and/or service description for this MBS User Service.	
mainServLang	string	O	0..1	Represents the main service language of this MBS User Service.	
mbsDistSessAnmt	map(MBSDistSessionAnmt)	C	1..N	Represents the set of MBS Distribution Session Announcements currently associated with this MBS User Service Announcement.  The key of the map shall be set to any string value.	

## 6.2.6.2.12 Type MBSDistSessionAnmt

Table 6.2.6.2.12-1: Definition of type MBSDistSessionAnmt

Attribute name	Data type	P	Cardinality	Description	Applicability
mbsSessionId	MbsSessionId	O	0..1	Represents the MBS Distribution Session Identifier with the Temporary Mobile Group Identity (TMGI) or Source-Specific Multicast (SSM) IP address of the MBS Session supporting this MBS Distribution Session.	
mbsFSAId	MbsFsald	O	0..1	Represents MBS Frequency Selection Assistance information corresponding to the MBS Distribution Session.  This attribute may be included only if the parent MBS User Service is of Broadcast service type.	
distrMethod	DistributionMethod	M	1	Represents the distribution method of this MBS Distribution Session.	
objDistrAnnInfo	ObjectDistrMethAnmt Info	O	0..1	Represents MBS Distribution Session Announcement parameters for Object Distribution Method. May only be present when the "distrMethod" attribute value is set as "OBJECT".	
sesDesInfo	array(string)	M	1..N	Represents the additional parameters needed to receive the MBS Distribution Session from which this announcement is derived, including relevant User Plane traffic flow parameters.	

## 6.2.6.2.13 Type ObjectDistMethAnmtInfo

Table 6.2.6.2.13-1: Definition of type ObjectDistMethAnmtInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
objDistrSched	TimeWindow	O	0..1	Represents a schedule indicating when individual objects are to be delivered on the corresponding MBS Distribution Session.  This attribute may be present only when this information has been provided in the Object acquisition identifiers of the corresponding MBS Distribution Session.	
objDistrBaseUri	Uri	O	0..1	Represents a URI prefix substituted by the MBSTF Client with the <i>Object repair base URI</i> when repairing objects not received completely intact from the corresponding MBS Distribution Session.  This attribute may be present only when object repair is provisioned for the corresponding MBS Distribution Session.	
objRepBaseUri	Uri	O	0..1	Represents the base URI of the MBS AS to be used for object repair of the corresponding MBS Distribution Session.  This attribute may be present only when object repair is provisioned for the corresponding MBS Distribution Session.	

## 6.2.6.2.14 Type: FECConfig

Table 6.2.6.2.14-1: Definition of type FECConfig

Attribute name	Data type	P	Cardinality	Description	Applicability
fecScheme	Uri	M	1	Contains the AL-FEC scheme to be used by the MBSTF.  It shall be identified using a term from the IANA: "Reliable Multicast Transport (RMT) FEC Encoding IDs and FEC Instance IDs" [20] expressed as a URN, e.g.: urn:ietf:rmt:fec:encoding:0	
fecOverhead	integer	M	1	The overhead of AL-FEC protection, corresponding to a proportion of the (unprotected) MBS data, expressed in the form of a percentage.	
additionalParams	array(AddFecParams)	O	0..1	Represents additional scheme-specific parameters for AL-FEC configuration, encoded using uncontrolled {name, value} pairs.	

## 6.2.6.2.15 Type: AddFecParams

**Table 6.2.6.2.15-1: Definition of type AddFecParams**

Attribute name	Data type	P	Cardinality	Description	Applicability
paramName	string	M	1	Contains the name of the FEC configuration parameter.	
paramValue	string	M	1	Contains the value of the FEC configuration parameter.	

## 6.2.6.2.16 Type MBSUserDataIngStatSubscPatch

**Table 6.2.6.2.16-1: Definition of type MBSUserDataIngStatSubscPatch**

Attribute name	Data type	P	Cardinality	Description	Applicability
eventsubscs	array(SubscribedEvent)	O	1..N	Represents the updated list of subscribed MBS User Data Ingest Session Status event(s).	
notifUri	Uri	O	0..1	Represents the updated notification URI to be used for MBS User Data Ingest Session Status event(s) reporting.	

## 6.2.6.3 Simple data types and enumerations

## 6.2.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

## 6.2.6.3.2 Simple data types

The simple data types defined in table 6.2.6.3.2-1 shall be supported.

**Table 6.2.6.3.2-1: Simple data types**

Type Name	Type Definition	Description	Applicability

## 6.2.6.3.3 Enumeration: DistributionMethod

The enumeration DistributionMethod represents the MBS Distribution Method. It shall comply with the provisions of table 6.2.6.3.3-1.

**Table 6.2.6.3.3-1: Enumeration DistributionMehod**

Enumeration value	Description	Applicability
OBJECT	Indicates the Object Distribution Method.	
PACKET	Indicates the Packet Distribution Method.	

## 6.2.6.3.4 Enumeration: Event

The enumeration Event represents the MBS User Data Ingest Session Status events. It shall comply with the provisions of table 6.2.6.3.4-1.

Table 6.2.6.3.4-1: Enumeration Event

Enumeration value	Description	Applicability
USER_DATA_ING_SESS_STARTING	Indicates that the MBS User Data Ingest Session is starting.  This is an "MBS User Data Ingest Session" level event.	
USER_DATA_ING_SESS_STARTED	Indicates that the MBS User Data Ingest Session started.  This is an "MBS User Data Ingest Session" level event.	
USER_DATA_ING_SESS_TERMINATED	Indicates that the MBS User Data Ingest Session is terminated.  This is an "MBS User Data Ingest Session" level event.	
DIST_SESS_STARTING	Indicates that the MBS Distribution Session is starting.  This is an "MBS Distribution Session" level event.	
DIST_SESS_STARTED	Indicates that the MBS Distribution Session started.  This is an "MBS Distribution Session" level event.	
DIST_SESS_TERMINATED	Indicates that the MBS Distribution Session is terminated.  This is an "MBS Distribution Session" level event.	
DIST_SESS_SERV_MNGT_FAILURE	Indicates that the MBS Distribution Session could not be started (e.g. the necessary resources could not be allocated by the MBS system).  This is an "MBS Distribution Session" level event.	
DIST_SESS_POL_CTRL_FAILURE	Indicates that the MBS Distribution Session could not be started because of a policy authorization/control failure or rejection.  This is an "MBS Distribution Session" level event.	
DATA_INGEST_FAILURE	The MBS User Data Ingest failed because the MBSTF is expecting data (the MBS Session is active), but not receiving it.  This is an "MBS Distribution Session" level event.	
DELIVERY_STARTED	The MBS User Data delivery is started.	
SESSION_TERMINATED	The MBS User Data Ingest Session is terminated.	

#### 6.2.6.4 Data types describing alternative data types or combinations of data types

There are no data types describing alternative data types or combinations of data types defined for this API in this release of the specification.

## 6.2.6.5 Binary data

### 6.2.6.5.1 Binary Data Types

**Table 6.2.6.5.1-1: Binary Data Types**

Name	Clause defined	Content type

## 6.2.7 Error Handling

### 6.2.7.1 General

For the Nmbsf\_MBSUserDataIngestSession API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Nmbsf\_MBSUserDataIngestSession API.

### 6.2.7.2 Protocol Errors

No specific procedures for the Nmbsf\_MBSUserDataIngestSession service are specified.

### 6.2.7.3 Application Errors

The application errors defined for the Nmbsf\_MBSUserDataIngestSession service are listed in Table 6.2.7.3-1.

**Table 6.2.7.3-1: Application errors**

Application Error	HTTP status code	Description

## 6.2.8 Feature negotiation

The optional features in table 6.2.8-1 are defined for the Nmbsf\_MBSUserDataIngestSession API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

**Table 6.2.8-1: Supported Features**

Feature number	Feature Name	Description

## 6.2.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Nmbsf\_MBSUserDataIngestSession API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Nmbsf\_MBSUserDataIngestSession API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

**NOTE:** When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Nmbsf\_MBSUserDataIngestSession service.



The Nmbfs\_MBSUserDataIngestSession API defines a single scope "nmbfs-mbs-ud-ingest" for the entire service, and it does not define any additional scopes at resource or operation level.

# Annex A (normative): OpenAPI specification

## A.1 General

This Annex specifies the formal definition of the API(s) defined in the present specification. It consists of OpenAPI specifications in YAML format.

This Annex takes precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

NOTE 1: The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository that uses the GitLab software version control system (see 3GPP TS 29.501 [5] clause 5.3.1 and 3GPP TR 21.900 [7] clause 5B).

## A.2 Nmbsf\_MBSUserService API

```

openapi: 3.0.0
info:
  title: nmbsf-mbs-us
  version: 1.0.0
  description: |
    API for MBS User Service.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: >
    3GPP TS 29.580 V17.0.0; 5G System; Multicast/Broadcast Service Function Services.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.580/'

servers:
- url: '{apiRoot}/nmbsf-mbs-us/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501

security:
- {}
- oAuth2ClientCredentials: []

paths:
  /mbs-user-services:
    get:
      summary: Retrieve all the active MBS User Service resources managed by the MBSF.
      tags:
        - MBS User Services (Collection)
      operationId: RetrieveMBSUserServices
      responses:
        '200':
          description: >
            OK. All the active MBS User Services managed by the MBSF are returned.
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/MBSUserService'
                minItems: 1
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'

```

```

'308':
  $ref: 'TS29571_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'406':
  $ref: 'TS29571_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'

post:
  summary: Request the creation of a new MBS User Service.
  tags:
    - MBS User Services (Collection)
  operationId: CreateMBSUserService
  requestBody:
    description: >
      Contains the parameters to request the creation of a new MBS User Service at the MBSF.
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/MBSUserService'
  responses:
    '201':
      description: >
        Created. A new MBS User Service is successfully created and a representation of the
        created Individual MBS User Service resource is returned.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MBSUserService'
      headers:
        Location:
          description: >
            Contains the URI of the newly created resource, according to the structure
            {apiRoot}/nmbsf-mbs-us/v1/mbs-user-services/{mbsUserServId}
          required: true
          schema:
            type: string
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'

/mbs-user-services/{mbsUserServId}:
  parameters:
    - name: mbsUserServId

```

```

    in: path
    description: Identifier of the Individual MBS User Service resource.
    required: true
    schema:
      type: string

get:
  summary: Retrieve an existing Individual MBS User Service resource.
  tags:
    - Individual MBS User Service (Document)
  operationId: RetrieveIndMBSUserService
  responses:
    '200':
      description: >
        OK. The requested Individual MBS User Service resource is successfully returned.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MBSUserService'
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '406':
      $ref: 'TS29571_CommonData.yaml#/components/responses/406'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'

put:
  summary: Request the update of an existing Individual MBS User Service resource.
  tags:
    - Individual MBS User Service (Document)
  operationId: UpdateIndMBSUserService
  requestBody:
    description: >
      Contains the updated representation of the Individual MBS User Service resource.
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/MBSUserService'
  responses:
    '200':
      description: >
        OK. The concerned Individual MBS User Service resource is successfully updated and a
        representation of the updated resource is returned in the response body.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MBSUserService'
    '204':
      description: >
        No Content. The concerned Individual MBS User Service resource is successfully updated
        and no content is returned in the response body.
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'

```

```

'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'

patch:
  summary: Request the modification of an existing Individual MBS User Service resource.
  tags:
    - Individual MBS User Service (Document)
  operationId: ModifyIndMBSUserService
  requestBody:
    description: >
      Contains the parameters to request the modification of the Individual MBS User Service
      resource.
    required: true
    content:
      application/merge-patch+json:
        schema:
          $ref: '#/components/schemas/MBSUserServicePatch'
  responses:
    '200':
      description: >
        OK. The concerned Individual MBS User Service resource is successfully modified and a
        representation of the updated resource is returned in the response body.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MBSUserService'
    '204':
      description: >
        No Content. The concerned Individual MBS User Service resource is successfully modified
        and no content is returned in the response body.
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'

delete:
  summary: Request the deletion of an existing Individual MBS User Service resource.
  tags:
    - Individual MBS User Service (Document)
  operationId: DeleteIndMBSUserService
  responses:
    '204':

```

```

    description: >
      No Content. The concerned Individual MBS User Service resource is successfully deleted.
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'

```

```

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUri}'
          scopes: {}
      description: >
        For trusted MBSF, the 'nmbsf-mbs-us' shall be used as 'scopes' and
        '{nrfApiRoot}/oauth2/token' shall be used as 'tokenUri'.

```

#

# STRUCTURED DATA TYPES

#

```

schemas:
  MBSUserService:
    description: Represents the parameters of an MBS User Service.
    type: object
    properties:
      extServiceIds:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
        minItems: 1
      servType:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceType'
      servClass:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      servAnnModes:
        type: array
        items:
          $ref: '#/components/schemas/ServiceAnnouncementMode'
        minItems: 1
      servNameDescs:
        type: array
        items:
          $ref: '#/components/schemas/ServiceNameDescription'
        minItems: 1
      mainServLang:
        type: string
      suppFeat:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    required:
      - extServiceIds
      - servType
      - servClass
      - servAnnModes
      - ServNameDescs

```

```

ServiceNameDescription:
  description: >
    Represents a set of per language service names and/or service descriptions.
  type: object

```

```

properties:
  servName:
    type: string
  servDescrip:
    type: string
  language:
    type: string
required:
- language
anyOf:
- required: [servName]
- required: [servDescrip]

MBSUserServicePatch:
description: >
  Represents the requested modifications to the parameters of an MBS User Service.
type: object
properties:
  extServiceIds:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    minItems: 1
  servClass:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
  servAnnModes:
    type: array
    items:
      $ref: '#/components/schemas/ServiceAnnouncementMode'
    minItems: 1
  servNameDescs:
    type: array
    items:
      $ref: '#/components/schemas/ServiceNameDescription'
    minItems: 1
  mainServLang:
    type: string

# SIMPLE DATA TYPES
#

#
# ENUMERATIONS
#
ServiceAnnouncementMode:
  oneOf:
  - type: string
    enum:
      - VIA_MBS_5
      - VIA_MBS_DISTRIBUTION_SESSION
      - PASSED_BACK
  - type: string
    description: >
      Represents the Service Announce Mode.
    description: |
      Possible values are:
      - VIA_MBS_5: Indicates the MBS User Service Announcement compiled by the MBSF is advertised
to the MBSF Client at reference point MBS-5.
      - VIA_MBS_DISTRIBUTION_SESSION: Indicates the MBS User Service Announcement compiled by the
MBSF is advertised to the MBSF Client via the MBS Distribution Session.
      - PASSED_BACK: Indicates the MBS User Service Announcement compiled by the MBSF is passed
back to the MBS Application Provider.

```

---

## A.3 Nmbsf\_MBSUserDataIngestSession API

openapi: 3.0.0

```

info:
  title: nmbsf-mbs-ud-ingest
  version: 1.0.0
  description: |
    API for MBS User Data Ingest Session Service.
    © 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

```

```

externalDocs:
  description: >
    3GPP TS 29.580 V17.0.0; 5G System; Multicast/Broadcast Service Function Services.
  url: 'https://www.3gpp.org/ftp/Specs/archive/29_series/29.580/'

servers:
- url: '{apiRoot}/nmbmf-mbs-ud-ingest/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501

security:
- {}
- oAuth2ClientCredentials: []

paths:
  /sessions:
    get:
      summary: Retrieve all the active MBS User Data Ingest Sessions managed by the MBSF.
      tags:
        - MBS User Data Ingest Sessions (Collection)
      operationId: RetrieveMBSUserDataIngSessions
      responses:
        '200':
          description: >
            OK. All the active MBS User Data Ingest Sessions managed by the MBSF are returned.
          content:
            application/json:
              schema:
                type: array
                items:
                  $ref: '#/components/schemas/MBSUserDataIngSession'
                minItems: 1
        '307':
          $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '406':
          $ref: 'TS29571_CommonData.yaml#/components/responses/406'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29571_CommonData.yaml#/components/responses/default'

    post:
      summary: Request the creation of a new MBS User Data Ingest Session.
      tags:
        - MBS User Data Ingest Sessions (Collection)
      operationId: CreateMBSUserDataIngSession
      requestBody:
        description: >
          Contains the parameters to request the creation of a new MBS User Data Ingest Session
          at the MBSF.
        required: true
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MBSUserDataIngSession'
      responses:
        '201':
          description: >
            Created. A new MBS User Data Ingest Session is successfully created and a representation
            of the created Individual MBS User Data Ingest Session resource is returned.
          content:
            application/json:

```



```

    schema:
      $ref: '#/components/schemas/MBSUserDataIngSession'
  headers:
    Location:
      description: >
        Contains the URI of the newly created resource, according to the structure
        {apiRoot}/nmbs-mbs-ud-ingest/v1/sessions/{sessionId}
      required: true
      schema:
        type: string
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'

/sessions/{sessionId}:
  parameters:
    - name: sessionId
      in: path
      description: Identifier of the Individual MBS User Data Ingest Session resource.
      required: true
      schema:
        type: string

  get:
    summary: Retrieve an existing Individual MBS User Data Ingest Session resource.
    tags:
      - Individual MBS User Data Ingest Session (Document)
    operationId: RetrieveIndMBSUserDataIngSession
    responses:
      '200':
        description: >
          OK. The requested Individual MBS User Data Ingest Session resource is successfully
          returned.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/MBSUserDataIngSession'
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
      '406':
        $ref: 'TS29571_CommonData.yaml#/components/responses/406'
      '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:

```

\$ref: 'TS29571\_CommonData.yaml#/components/responses/default'

put:

summary: Request the update of an existing Individual MBS User Data Ingest Session resource.

tags:

- Individual MBS User Data Ingest Session (Document)

operationId: UpdateIndMBSUserDataIngSession

requestBody:

description: >

Contains the updated representation of the Individual MBS User Data Ingest Session resource.

required: true

content:

application/json:

schema:

\$ref: '#/components/schemas/MBSUserDataIngSession'

responses:

'200':

description: >

OK. The concerned Individual MBS User Data Ingest Session resource is successfully updated and a representation of the updated resource is returned in the response body.

content:

application/json:

schema:

\$ref: '#/components/schemas/MBSUserDataIngSession'

'204':

description: >

No Content. The concerned Individual MBS User Data Ingest Session resource is successfully updated and no content is returned in the response body.

'307':

\$ref: 'TS29571\_CommonData.yaml#/components/responses/307'

'308':

\$ref: 'TS29571\_CommonData.yaml#/components/responses/308'

'400':

\$ref: 'TS29571\_CommonData.yaml#/components/responses/400'

'401':

\$ref: 'TS29571\_CommonData.yaml#/components/responses/401'

'403':

\$ref: 'TS29571\_CommonData.yaml#/components/responses/403'

'404':

\$ref: 'TS29571\_CommonData.yaml#/components/responses/404'

'411':

\$ref: 'TS29571\_CommonData.yaml#/components/responses/411'

'413':

\$ref: 'TS29571\_CommonData.yaml#/components/responses/413'

'415':

\$ref: 'TS29571\_CommonData.yaml#/components/responses/415'

'429':

\$ref: 'TS29571\_CommonData.yaml#/components/responses/429'

'500':

\$ref: 'TS29571\_CommonData.yaml#/components/responses/500'

'503':

\$ref: 'TS29571\_CommonData.yaml#/components/responses/503'

default:

\$ref: 'TS29571\_CommonData.yaml#/components/responses/default'

patch:

summary: Request the modification of an existing Individual MBS User Data Ingest Session resource.

tags:

- Individual MBS User Data Ingest Session (Document)

operationId: ModifyIndMBSUserDataIngSession

requestBody:

description: >

Contains the parameters to request the modification of the Individual MBS User Data Ingest Session resource.

required: true

content:

application/merge-patch+json:

schema:

\$ref: '#/components/schemas/MBSUserDataIngSessionPatch'

responses:

'200':

description: >

OK. The concerned Individual MBS User Data Ingest Session resource is successfully modified and a representation of the updated resource is returned in the response body.

content:

application/json:

```

    schema:
      $ref: '#/components/schemas/MBSUserDataIngSession'
  '204':
    description: >
      No Content. The concerned Individual MBS User Data Ingest Session resource is
      successfully modified and no content is returned in the response body.
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'

```

#### delete:

summary: Request the deletion of an existing Individual MBS User Data Ingest Session resource.

#### tags:

- Individual MBS User Data Ingest Session (Document)

operationId: DeleteIndMBSUserDataIngSession

#### responses:

```

  '204':
    description: >
      No Content. The Individual MBS User Data Ingest Session resource is successfully
      deleted.
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'

```

#### /status-subscriptions:

##### get:

summary: Retrieve all the active MBS User Data Ingest Session Status Subscription resources managed by the MBSF.

#### tags:

- MBS User Data Ingest Session Status Subscriptions (Collection)

operationId: RetrieveMBSUserDataIngStatSubscs

#### responses:

```

  '200':
    description: >
      OK. All the active MBS User Data Ingest Session Status Subscriptions managed by the MBSF
      are returned.
    content:

```

```

    application/json:
      schema:
        type: array
        items:
          $ref: '#/components/schemas/MBSUserDataIngStatSubsc'
        minItems: 1
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29571_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'

```

post:

```

summary: Request the creation of a new MBS User Data Ingest Session Status Subscription.
tags:
  - MBS User Data Ingest Session Status Subscriptions (Collection)
operationId: CreateMBSUserDataIngStatSubsc
requestBody:
  description: >
    Contains the parameters to request the creation of a new MBS User Data Ingest Session
    Status Subscription.
  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/MBSUserDataIngStatSubsc'
responses:
  '201':
    description: >
      Created. Successful creation of a new Individual MBS User Data Ingest Session
      Status Subscription resource.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/MBSUserDataIngStatSubsc'
    headers:
      Location:
        description: >
          Contains the URI of the newly created resource, according to the structure
          {apiRoot}/nmbs-mbs-ud-ingest/v1/status-subscriptions/{subscriptionId}
        required: true
        schema:
          type: string
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'

```

```

'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
callbacks:
  mbsUserDataIngestSessionStatusNotif:
    '{request.body#/notifUri}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/MBSUserDataIngStatNotif'
        responses:
          '204':
            description: No Content. Successful reception of the notification.
          '307':
            $ref: 'TS29571_CommonData.yaml#/components/responses/307'
          '308':
            $ref: 'TS29571_CommonData.yaml#/components/responses/308'
          '400':
            $ref: 'TS29571_CommonData.yaml#/components/responses/400'
          '401':
            $ref: 'TS29571_CommonData.yaml#/components/responses/401'
          '403':
            $ref: 'TS29571_CommonData.yaml#/components/responses/403'
          '404':
            $ref: 'TS29571_CommonData.yaml#/components/responses/404'
          '411':
            $ref: 'TS29571_CommonData.yaml#/components/responses/411'
          '413':
            $ref: 'TS29571_CommonData.yaml#/components/responses/413'
          '415':
            $ref: 'TS29571_CommonData.yaml#/components/responses/415'
          '429':
            $ref: 'TS29571_CommonData.yaml#/components/responses/429'
          '500':
            $ref: 'TS29571_CommonData.yaml#/components/responses/500'
          '503':
            $ref: 'TS29571_CommonData.yaml#/components/responses/503'
          default:
            $ref: 'TS29571_CommonData.yaml#/components/responses/default'

/status-subscriptions/{subscriptionId}:
  parameters:
    - name: subscriptionId
      in: path
      description: >
        Identifier of the Individual MBS User Data Ingest Session Status Subscription resource.
      required: true
      schema:
        type: string

  get:
    summary: Retrieve an existing Individual MBS User Data Ingest Session Status Subscription
    resource.
    tags:
      - Individual MBS User Data Ingest Session Status Subscription (Document)
    operationId: RetrieveIndMBSUserDataIngStatSubsc
    responses:
      '200':
        description: >
          OK. Successful retrieval of the requested Individual MBS User Data Ingest Session
          Status Subscription resource.
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/MBSUserDataIngStatSubsc'
      '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'

```

```

'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'406':
  $ref: 'TS29571_CommonData.yaml#/components/responses/406'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'

put:
  summary: Request the update of an existing Individual MBS User Data Ingest Session Status
Subscription resource.
  tags:
    - Individual MBS User Data Ingest Session Status Subscription (Document)
  operationId: UpdateIndMBSUserDataIngStatSubsc
  requestBody:
    description: >
      Contains the updated representation of the Individual MBS User Data Ingest Session Status
      Subscription resource.
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/MBSUserDataIngStatSubsc'
  responses:
    '200':
      description: >
        OK. The concerned Individual MBS User Data Ingest Session Status Subscription resource
        is successfully updated and a representation of the updated resource is returned in the
        response body.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MBSUserDataIngStatSubsc'
    '204':
      description: >
        No Content. The concerned Individual MBS User Data Ingest Session Status Subscription
        resource is successfully updated and no content is returned in the response body.
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'

patch:
  summary: Request the modification of an existing Individual MBS User Data Ingest Session
Status Subscription resource.
  tags:
    - Individual MBS User Data Ingest Session Status Subscription (Document)
  operationId: ModifyIndMBSUserDataIngStatSubsc
  requestBody:

```

```

description: >
  Contains the parameters to request the modification of the Individual MBS User Data Ingest
  Session Status Subscription resource.
required: true
content:
  application/merge-patch+json:
    schema:
      $ref: '#/components/schemas/MBSUserDataIngStatSubscPatch'
responses:
  '200':
    description: >
      OK. The concerned Individual MBS User Data Ingest Session Status Subscription resource
      is successfully modified and a representation of the updated resource is returned in the
      response body.
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/MBSUserDataIngStatSubsc'
  '204':
    description: >
      No Content. The concerned Individual MBS User Data Ingest Session Status Subscription
      resource is successfully modified and no content is returned in the response body.
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29571_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'

```

**delete:**

summary: Request the deletion of an existing Individual MBS User Data Ingest Session Status Subscription resource.

tags:

- Individual MBS User Data Ingest Session Status Subscription (Document)

operationId: DeleteMBSUserDataIngStatSubsc

responses:

```

  '204':
    description: >
      No Content. Successful deletion of the existing Individual MBS User Data Ingest Session
      Status Subscription resource.
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'

```

```

    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
      description: >
        For trusted MBSF, the 'mbsf-mbs-ud-ingest' shall be used as 'scopes' and
        '{nrfApiRoot}/oauth2/token' shall be used as 'tokenUri'.

#
# STRUCTURED DATA TYPES
#
schemas:
  MBSUserDataIngSession:
    description: Represents MBS User Data Ingest Session information.
    type: object
    properties:
      mbsUserServId:
        type: string
      mbsDisSessInfos:
        type: object
        additionalProperties:
          $ref: '#/components/schemas/MBSDistributionSessionInfo'
        minProperties: 1
      description: >
        Represents one or more MBS Distribution Session(s) composing the MBS User Data Ingest
        Session. The key of the map shall be set to the value of the "mbsDistSessionId" attribute
        of the MBSDistributionSessionInfo data structure encoding the corresponding map entry.
    actPeriods:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
      minItems: 1
    mbsUserServAnmt:
      $ref: '#/components/schemas/MBSUserServAnmt'
    suppFeat:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
    required:
      - mbsUserServId
      - mbsDisSessInfos

  MBSDistributionSessionInfo:
    description: Represents MBS Distribution Session information.
    type: object
    properties:
      mbsDistSessionId:
        type: string
      mbsSessionId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsSessionId'
      mbsServInfo:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceInfo'
      maxContBitRate:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/BitRate'
      maxContDelay:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/PacketDelBudget'
      distrMethod:
        $ref: '#/components/schemas/DistributionMethod'
      fecConfig:
        $ref: '#/components/schemas/FECConfig'
      objDistrInfo:
        $ref: '#/components/schemas/ObjectDistrMethInfo'
      pckDistrInfo:
        $ref: '#/components/schemas/PacketDistrMethInfo'
      trafficMarkingInfo:
        type: string
      mbsDistSessState:
        $ref: 'TS29581_Nmbstf_DistSession.yaml#/components/schemas/DistSessionState'
      tgtServAreas:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsServiceArea'
      extTgtServAreas:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ExternalMbsServiceArea'

```



```

mbsFSAId:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsFsaId'
locationDependent:
  type: boolean
  description: >
    Represents an indication that this MBS Distribution Session belongs to a location-
    dependent MBS. This attribute shall be set to "true" to indicate that the MBS
    Distribution Session belongs to a location-dependent MBS; or set to "false" to
    indicate that the MBS Distribution Session does not belong to a location-dependent MBS.
    The default value is "false", if omitted.
  default: false
multiplexedServFlag:
  type: boolean
  description: >
    Represents an indication that this MBS Distribution Session belongs to a multiplex, i.e.
    forms part of a set of MBS Distribution Sessions under the same parent MBS User Data
    Ingest Session with identical or empty sets of target service areas and multiplexed onto
    the same MBS Session at the MB-SMF.
  default: false
restrictedFlag:
  type: boolean
  description: >
    Represents an indication that this MBS Distribution Session is not open to any UE, i.e.
    restricted to a set of UEs according to their MBS related subscription information.
    This attribute may be included only if the parent MBS User Service is of Multicast
    service type. This attribute shall be set to "true" to indicate that this MBS
    Distribution Session is restricted to a set of UE(s); or set to "false" to indicate that
    this MBS Distribution Session is open to any UE.
    The default value is "false", if omitted.
  default: false
required:
- distrMethod
- maxContBitRate

MBSUserDataIngSessionPatch:
  description: >
    Represents the requested modifications to an MBS User Data Ingest Session Status
    Subscription.
  type: object
  properties:
    mbsDistSessInfos:
      type: object
      additionalProperties:
        $ref: '#/components/schemas/MBSDistributionSessionInfo'
      minProperties: 1
      description: >
        Contains the requested modifications to one or more MBS Distribution Session(s)
        composing the MBS User Data Ingest Session.
    actPeriods:
      type: array
      items:
        $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
      minItems: 1

ObjectDistrMethInfo:
  description: >
    Represents additional MBS Distribution Session parameters for the case of an Object
    Distribution Method.
  type: object
  properties:
    operatingMode:
      $ref: 'TS29581_Nmbstf_DistSession.yaml#/components/schemas/ObjDistributionOperatingMode'
    objAcqMethod:
      $ref: 'TS29581_Nmbstf_DistSession.yaml#/components/schemas/ObjAcquisitionMethod'
    objAcqIds:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      minItems: 1
    objIngUri:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    objDistrUri:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    objRepairUri:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
  required:
- operationMode
- ObjAcqMethod

```

```

- objAcqIds

PacketDistrMethInfo:
  description: >
    Represents additional MBS Distribution Session parameters for the case of Packet
    Distribution Method.
  type: object
  properties:
    operatingMode:
      $ref: 'TS29581_Nmbstf_DistSession.yaml#/components/schemas/PktDistributionOperatingMode'
    pktIngMethod:
      $ref: 'TS29581_Nmbstf_DistSession.yaml#/components/schemas/PktIngestMethod'
    ingEndpointAdrs:
      $ref: 'TS29581_Nmbstf_DistSession.yaml#/components/schemas/MbStfIngestAddr'
  required:
    - operationMode
    - pktIngMethod
    - ingEndpointAdrs

MBSUserDataIngStatSubsc:
  description: >
    Represents an MBS User Data Ingest Session Status Subscription.
  type: object
  properties:
    mbsIngSessionId:
      type: string
    eventSubscs:
      type: array
      items:
        $ref: '#/components/schemas/SubscribedEvent'
      minItems: 1
    notifUri:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
  required:
    - mbsIngSessionId
    - eventSubscs
    - notifUri

MBSUserDataIngStatSubscPatch:
  description: >
    Represents the requested modifications to an MBS User Data Ingest Session Status
    Subscription.
  type: object
  properties:
    eventSubscs:
      type: array
      items:
        $ref: '#/components/schemas/SubscribedEvent'
      minItems: 1
    notifUri:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'

SubscribedEvent:
  description: >
    Represents a subscribed MBS User Data Ingest Session Status event and the related
    information..
  type: object
  properties:
    statusEvent:
      $ref: '#/components/schemas/Event'
    mbsDistSessionId:
      type: string
  required:
    - statusEvent

MBSUserDataIngStatNotif:
  description: >
    Represents an MBS User Data Ingest Session Status Notification.
  type: object
  properties:
    mbsIngSessionId:
      type: string
    eventNotifs:
      type: array
      items:
        $ref: '#/components/schemas/EventNotification'
      minItems: 1
  required:

```

```

- mbsIngSessionId
- eventNotifs

EventNotification:
description: Represents Event Notification.
type: object
properties:
  statusEvent:
    $ref: '#/components/schemas/Event'
  mbsDisSessionId:
    type: string
  statusAddInfo:
    type: string
  timeStamp:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
required:
- statusEvent
- timeStamp

MBSUserServAnmt:
description: >
  Represents the MBS User Service Announcement currently associated with the MBS User Data
  Ingest Session.
type: object
properties:
  extServiceId:
    type: array
    items:
      type: string
    minItems: 1
  servClass:
    type: string
  startTime:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
  endTime:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
  servNameDescs:
    type: array
    items:
      $ref: 'TS29580_Nmbmf_MBSUserService.yaml#/components/schemas/ServiceNameDescription'
    minItems: 1
  mainServLang:
    type: string
  mbsDistSessAnmt:
    additionalProperties:
      $ref: '#/components/schemas/MBSDistSessionAnmt'
    minProperties: 1
    description: >
      Represents the set of MBS Distribution Session Announcements currently associated with
      this MBS User Service Announcement.
required:
- extServiceId
- servClass
- servNameDescs

MBSDistSessionAnmt:
description: >
  Represents the set of MBS Distribution Session Announcements currently associated with this
  MBS User Service Announcement.
type: object
properties:
  mbsSessionId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsSessionId'
  mbsFSAId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/MbsFsaId'
  distrMethod:
    $ref: '#/components/schemas/DistributionMethod'
  objDistrAnnInfo:
    $ref: '#/components/schemas/ObjectDistMethAnmtInfo'
  sesDesInfo:
    type: array
    items:
      type: string
    minItems: 1
required:
- distrMethod
- sesDesInfo

```

```

ObjectDistMethAnmtInfo:
  description: >
    Represents MBS Distribution Session Announcement parameters for Object Distribution Method.
  type: object
  properties:
    objDistrSched:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/TimeWindow'
    objDistrBaseUri:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    objRepBaseUri:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'

FECConfig:
  description: Represents FEC configuration information.
  type: object
  properties:
    fecScheme:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    fecOverHead:
      type: integer
    additionalParams:
      type: array
      items:
        $ref: '#/components/schemas/AddFecParams'
      minItems: 1
  required:
    - fecScheme
    - fecOverHead

AddFecParams:
  description: Represents additional scheme-specific parameters for AL-FEC configuration.
  type: object
  properties:
    paramName:
      type: string
    paramValue:
      type: string
  required:
    - paramName
    - paramValue

# SIMPLE DATA TYPES
#

#
# ENUMERATIONS
#

DistributionMethod:
  oneOf:
    - type: string
    enum:
      - OBJECT
      - PACKET
    - type: string
  description: >
    Represents the MBS User Data Distribution Mode.
  description: |
    Possible values are:
    - OBJECT: Indicates the Object Distribution Method.
    - PACKET: Indicates the Packet Distribution Method.

Event:
  oneOf:
    - type: string
    enum:
      - USER_DATA_ING_SESS_STARTING
      - USER_DATA_ING_SESS_STARTED
      - USER_DATA_ING_SESS_TERMINATED
      - DIST_SESS_STARTING
      - DIST_SESS_STARTED
      - DIST_SESS_TERMINATED
      - DIST_SESS_SERV_MNGT_FAILURE
      - DIST_SESS_POL_CRTL_FAILURE
      - DATA_INGEST_FAILURE
      - DELIVERY_STARTED
      - SESSION_TERMINATED
    - type: string
  description: >

```

Represents MBS User Data Ingest Session status change event.  
description: |

Possible values are:

- USER\_DATA\_ING\_SESS\_STARTING: >  
Indicates that the MBS User Data Ingest Session is starting. This is an "MBS User Data Ingest Session" level event.
- USER\_DATA\_ING\_SESS\_STARTED: >  
Indicates that the MBS User Data Ingest Session started. This is an "MBS User Data Ingest Session" level event.
- USER\_DATA\_ING\_SESS\_TERMINATED: >  
Indicates that the MBS User Data Ingest Session is terminated. This is an "MBS User Data Ingest Session" level event.
- DIST\_SESS\_STARTING: >  
Indicates that the MBS Distribution Session is starting. This is an "MBS Distribution Session" level event.
- DIST\_SESS\_STARTED: >  
Indicates that the MBS Distribution Session started. This is an "MBS Distribution Session" level event.
- DIST\_SESS\_TERMINATED: >  
Indicates that the MBS Distribution Session is terminated. This is an "MBS Distribution Session" level event.
- DIST\_SESS\_SERV\_MNGT\_FAILURE: >  
Indicates that the MBS Distribution Session could not be started (e.g. the necessary resources could not be allocated by the MBS system). This is an "MBS Distribution Session" level event.
- DIST\_SESS\_POL\_CTRL\_FAILURE: >  
Indicates that the MBS Distribution Session could not be started because of a policy authorization/control failure or rejection. This is an "MBS Distribution Session" level event.
- DATA\_INGEST\_FAILURE: >  
The MBS User Data Ingest is failed because the MBSTF is expecting data (the MBS Session is active), but not receiving it. This is an "MBS Distribution Session" level event.
- DELIVERY\_STARTED: >  
The MBS User Data delivery is started.
- SESSION\_TERMINATED: >  
The MBS User Data Ingest Session is terminated.

---

## Annex B (informative): Withdrawn API versions

### B.1 General

This Annex lists withdrawn API versions of the APIs defined in the present specification. Clause 4.3.1.6 of 3GPP TS 29.501 [5] describes the withdrawal of API versions.

---

### B.2 Nmbsf\_MBSUserService API

The API versions listed in table B.2-1 are withdrawn for the Nmbsf\_MBSUserService API.

**Table B.2-1: Withdrawn API versions of the Nmbsf\_MBSUserService service**

API version number	Remarks

---

### B.3 Nmbsf\_MBSUserDataIngestSession API

The API versions listed in table B.3-1 are withdrawn for the Nmbsf\_MBSUserDataIngestSession API.

**Table B.3-1: Withdrawn API versions of the Nmbsf\_MBSUserDataIngestSession service**

API version number	Remarks

## Annex C (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2022-02	CT3#120-e		-	-	-	Skeleton for the new MBSF Services TS	0.0.0
2022-02	CT3#120-e	C3-221312	-	-	-	Inclusion of C3-221312, C3-221313.	0.1.0
2022-04	CT3#121-e	C3-222484	-	-	-	Inclusion of C3-222373, C3-222374, C3-222408, C3-222475, C3-222476.	0.2.0
2022-05	CT3#122-e	C3-223507	-	-	-	Inclusion of C3-223604, C3-223310, C3-223311, C3-223605, C3-223313, C3-223314, C3-223315, C3-223316, C3-223317, C3-223410, C3-223543, C3-223412, C3-223544, C3-223545, C3-223546, C3-223547, C3-223417, C3-223418, C3-223419, C3-223745, C3-223421, C3-223422, C3-223423, C3-223747, C3-223748, C3-223750.	0.3.0
2022-06	CT#96	CP-221098				Presentation to TSG CT for information	1.0.0
2022-09	CT#97e					Inclusion of C3-224776, C3-224495, C3-224387, C3-224653, C3-224654, C3-224712, C3-224713, C3-224438, C3-224439	1.0.1
2022-09	CT#97e	CP-222130				Presentation to TSG CT for approval	2.0.0
2022-09	CT#97e	CP-222130				Approved by TSG CT	17.0.0

---

# History

<b>Document history</b>		
V17.0.0	September 2022	Publication