

ETSI TS 129 591 V17.5.0 (2022-05)



**5G;  
5G System;  
Network Exposure Function Southbound Services;  
Stage 3  
(3GPP TS 29.591 version 17.5.0 Release 17)**



---

**Reference**

RTS/TSGC-0329591vh50

---

**Keywords**

5G

**ETSI**

---

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° w061004871

---

**Important notice**

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our  
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

---

**Notice of disclaimer & limitation of liability**

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

---

**Copyright Notification**

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.  
All rights reserved.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	6
1 Scope .....	8
2 References .....	8
3 Definitions, symbols and abbreviations .....	9
3.1 Definitions .....	9
3.2 Symbols.....	9
3.3 Abbreviations .....	9
4 Services offered by the NEF .....	9
4.1 Introduction .....	9
4.2 Nnef_EventExposure Service.....	10
4.2.1 Service Description.....	10
4.2.1.1 Overview.....	10
4.2.1.2 Service Architecture.....	10
4.2.1.3 Network Functions .....	11
4.2.1.3.1 Network Exposure Function (NEF).....	11
4.2.1.3.2 NF Service Consumers .....	11
4.2.2 Service Operations .....	11
4.2.2.1 Introduction.....	11
4.2.2.2 Nnef_EventExposure_Subscribe service operation .....	12
4.2.2.2.1 General .....	12
4.2.2.2.2 Creating a new subscription .....	12
4.2.2.2.3 Modifying an existing subscription .....	14
4.2.2.3 Nnef_EventExposure_Unsubscribe service operation .....	15
4.2.2.3.1 General .....	15
4.2.2.3.2 Unsubscription from event notifications .....	15
4.2.2.4 Nnef_EventExposure_Notify service operation.....	16
4.2.2.4.1 General .....	16
4.2.2.4.2 Notification about subscribed events.....	16
4.3 Nnef_EASDeployment Service.....	17
4.3.1 Service Description.....	17
4.3.1.1 Overview.....	17
4.3.1.2 Service Architecture.....	18
4.3.1.3 Network Functions .....	18
4.3.1.3.1 Network Exposure Function (NEF).....	18
4.3.1.3.2 NF Service Consumers .....	18
4.3.2 Service Operations .....	19
4.3.2.1 Introduction.....	19
4.3.2.2 Nnef_EASDeployment_Subscribe service operation.....	19
4.3.2.2.1 General .....	19
4.3.2.2.2 Creating a new subscription .....	19
4.3.2.2.3 Nnef_EASDeployment_Unsubscribe service operation .....	20
4.3.2.2.3.1 General .....	20
4.3.2.2.3.2 Unsubscription of notification of changes of EAS Deployment Information.....	20
4.3.2.4 Nnef_EASDeployment_Notify service operation .....	20
4.3.2.4.1 General .....	20
4.3.2.4.2 Notification of changes of EAS Deployment Information .....	20
5 API Definitions .....	21
5.1 Nnef_EventExposure Service API .....	21
5.1.1 Introduction.....	21
5.1.2 Usage of HTTP.....	21

5.1.2.1	General .....	21
5.1.2.2	HTTP standard headers .....	21
5.1.2.2.1	General .....	21
5.1.2.2.2	Content type .....	21
5.1.2.3	HTTP custom headers .....	21
5.1.3	Resources .....	22
5.1.3.1	Overview .....	22
5.1.3.2	Resource: Network Exposure Event Subscriptions .....	22
5.1.3.2.1	Description .....	22
5.1.3.2.2	Resource Definition .....	22
5.1.3.2.3	Resource Standard Methods .....	23
5.1.3.2.3.1	POST .....	23
5.1.3.3	Resource: Individual Network Exposure Event Subscription .....	23
5.1.3.3.1	Description .....	23
5.1.3.3.2	Resource Definition .....	23
5.1.3.3.3	Resource Standard Methods .....	24
5.1.3.3.3.1	GET .....	24
5.1.3.3.3.2	PUT .....	24
5.1.3.3.3.3	DELETE .....	25
5.1.4	Custom Operations without associated resources .....	26
5.1.5	Notifications .....	26
5.1.5.1	General .....	26
5.1.5.2	Network Exposure Event Notification .....	27
5.1.5.2.1	Description .....	27
5.1.5.2.2	Target URI .....	27
5.1.5.2.3	Standard Methods .....	27
5.1.5.2.3.1	POST .....	27
5.1.6	Data Model .....	28
5.1.6.1	General .....	28
5.1.6.2	Structured data types .....	29
5.1.6.2.1	Introduction .....	29
5.1.6.2.2	Type: NefEventExposureSubsc .....	30
5.1.6.2.3	Type: NefEventExposureNotif .....	30
5.1.6.2.4	Type: NefEventNotification .....	31
5.1.6.2.5	Type NefEventSubs .....	32
5.1.6.2.6	Type UeCommunicationInfo .....	32
5.1.6.2.7	Type NefEventFilter .....	33
5.1.6.2.8	Type TargetUeIdentification .....	33
5.1.6.2.9	Type: ServiceExperienceInfo .....	34
5.1.6.2.10	Type: UeMobilityInfo .....	34
5.1.6.2.11	Type: UeTrajectoryInfo .....	34
5.1.6.2.12	Type PerformanceDataInfo .....	35
5.1.6.3	Simple data types and enumerations .....	35
5.1.6.3.1	Introduction .....	35
5.1.6.3.2	Simple data types .....	35
5.1.6.3.3	Enumeration: NefEvent .....	35
5.1.7	Error Handling .....	36
5.1.7.1	General .....	36
5.1.7.2	Protocol Errors .....	36
5.1.7.3	Application Errors .....	36
5.1.8	Feature negotiation .....	36
5.1.9	Security .....	36
5.2	Nnef_EASDeployment Service API .....	37
5.2.1	Introduction .....	37
5.2.2	Usage of HTTP .....	37
5.2.2.1	General .....	37
5.2.2.2	HTTP standard headers .....	37
5.2.2.2.1	General .....	37
5.2.2.2.2	Content type .....	37
5.2.2.3	HTTP custom headers .....	38
5.2.3	Resources .....	38
5.2.3.1	Overview .....	38

5.2.3.2	Resource: EAS Deployment Event Subscriptions.....	38
5.2.3.2.1	Description .....	38
5.2.3.2.2	Resource Definition.....	38
5.2.3.2.3	Resource Standard Methods .....	39
5.2.3.2.3.1	POST.....	39
5.2.3.3	Resource: Individual EAS Deployment Event Subscription.....	39
5.2.3.3.1	Description .....	39
5.2.3.3.2	Resource Definition.....	39
5.2.3.3.3	Resource Standard Methods .....	40
5.2.3.3.3.1	GET.....	40
5.2.3.3.3.2	PUT.....	41
5.2.3.3.3.3	DELETE .....	41
5.2.4	Custom Operations without associated resources .....	41
5.2.5	Notifications .....	42
5.2.5.1	General.....	42
5.2.5.2	EAS Deployment Event Notification.....	42
5.2.5.2.1	Description .....	42
5.2.5.2.2	Target URI.....	42
5.2.5.2.3	Standard Methods.....	42
5.2.5.2.3.1	POST.....	42
5.2.6	Data Model .....	43
5.2.6.1	General .....	43
5.2.6.2	Structured data types .....	44
5.2.6.2.1	Introduction .....	44
5.2.6.2.2	Type: EasDeploySubData.....	44
5.2.6.2.3	Type: EasDeployInfoNotif .....	45
5.2.6.2.4	Type: EasDepNotification .....	45
5.2.6.2.5	Type: EasDeployInfoData .....	45
5.2.6.3	Simple data types and enumerations .....	45
5.2.6.3.1	Introduction .....	45
5.2.6.3.2	Simple data types.....	45
5.2.6.3.3	Enumeration: EasEvent .....	46
5.2.7	Error Handling .....	46
5.2.7.1	General .....	46
5.2.7.2	Protocol Errors .....	46
5.2.7.3	Application Errors.....	46
5.2.8	Feature negotiation .....	46
5.2.9	Security.....	46
<b>Annex A (normative): OpenAPI specification.....</b>		<b>48</b>
A.1	General .....	48
A.2	Nnef_EventExposure API.....	48
A.3	Nnef_EASDeployment API .....	54
<b>Annex B (informative): Change history .....</b>		<b>59</b>
History .....		62

---

# Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, certain modal verbs have the following meanings:

**shall** indicates a mandatory requirement to do something

**shall not** indicates an interdiction (prohibition) to do something

NOTE 1: The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

NOTE 2: The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

**should** indicates a recommendation to do something

**should not** indicates a recommendation not to do something

**may** indicates permission to do something

**need not** indicates permission not to do something

NOTE 3: The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

**can** indicates that something is possible

**cannot** indicates that something is impossible

NOTE 4: The constructions "can" and "cannot" shall not to be used as substitutes for "may" and "need not".

**will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document

**will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document

**might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

**might not** indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

**is** (or any other verb in the indicative mood) indicates a statement of fact

**is not** (or any other negative verb in the indicative mood) indicates a statement of fact

NOTE 5: The constructions "is" and "is not" do not indicate requirements.

---

# 1 Scope

The present document specifies the stage 3 protocol and data model for the Nnef southbound Service Based Interface. It provides stage 3 protocol definitions and message flows, and specifies the API for each service offered by the Network Exposure Function (NEF).

The 5G System stage 2 architecture and procedures are specified in 3GPP TS 23.501 [2], 3GPP TS 23.502 [3] and 3GPP TS 23.288 [14].

The Technical Realization of the Service Based Architecture and the Principles and Guidelines for Services Definition are specified in 3GPP TS 29.500 [4] and 3GPP TS 29.501 [5].

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [3] 3GPP TS 23.502: "Procedures for the 5G System; Stage 2".
- [4] 3GPP TS 29.500: "5G System; Technical Realization of Service Based Architecture; Stage 3".
- [5] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [6] OpenAPI: "OpenAPI Specification Version 3.0.0", <https://spec.openapis.org/oas/v3.0.0>.
- [7] 3GPP TR 21.900: "Technical Specification Group working methods".
- [8] 3GPP TS 33.501: "Security architecture and procedures for 5G system".
- [9] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".
- [10] 3GPP TS 29.510: "5G System; Network Function Repository Services; Stage 3".
- [11] IETF RFC 7540: "Hypertext Transfer Protocol Version 2 (HTTP/2)".
- [12] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [13] IETF RFC 7807: "Problem Details for HTTP APIs".
- [14] 3GPP TS 23.288: "Architecture enhancements for 5G System (5GS) to support network data analytics services".
- [15] 3GPP TS 29.522: "5G System; Network Exposure Function Northbound APIs; Stage 3".
- [16] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces; Stage 3".
- [17] 3GPP TS 29.520: "5G System; Network Data Analytics Services; Stage 3".
- [18] 3GPP TS 29.517: "5G System; Application Function Event Exposure Service; Stage 3".
- [19] 3GPP TS 29.551: "5G System; Packet Flow Description Management Service; Stage 3".

- [20] 3GPP TS 29.541: "5G System; Network Exposure (NE) function services for Non-IP Data Delivery (NIDD); Stage 3".
- [21] 3GPP TS 29.554: "5G System; Background Data Transfer Policy Control Service; Stage 3".
- [22] 3GPP TS 29.523: "5G System; Policy Control Event Exposure Service; Stage 3".
- [23] 3GPP TS 29.256: "Uncrewed Aerial Systems Network Function (UAS-NF); Aerial Management Services; Stage 3".

---

## 3 Definitions, symbols and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

### 3.2 Symbols

For the purposes of the present document, the following symbols apply:

### 3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

API	Application Programming Interface
EAS	Edge Application Server
NEF	Network Exposure Function
NF	Network Function
NWDAF	Network Data Analytics Function
SMF	Session Management Function
SUPI	Subscription Permanent Identifier
URI	Uniform Resource Identifier

---

## 4 Services offered by the NEF

### 4.1 Introduction

The NEF offers to other NFs the following southbound services:

- Nnef\_EventExposure
- Nnef\_PFDManagement
- Nnef\_SMContext
- Nnef\_Authentication
- Nnef\_EASDeployment

NOTE 1: The northbound services offered by the NEF are defined in 3GPP TS 29.522 [15], e.g. the northbound requirement of Nnef\_EventExposure service or Nnef\_EASDeployment.

NOTE 2: The services offered by the NEF (e.g. Nnef\_EventExposure service) as specified in the present specification are only applicable for Nnef southbound services.

NOTE 3: The Nnef\_PFDManagement service offered by the NEF southbound is defined in 3GPP TS 29.551 [19].

NOTE 4: The Nnef\_SMContext service offered by the NEF southbound is defined in 3GPP TS 29.541 [20].

NOTE 5: The Nnef\_Authentication service offered by the NEF southbound is defined in 3GPP TS 29.256 [23].

## 4.2 Nnef\_EventExposure Service

### 4.2.1 Service Description

#### 4.2.1.1 Overview

The Nnef\_EventExposure service, as defined in 3GPP TS 23.502 [3], is provided by the Network Exposure Function (NEF).

This service:

- allows NF service consumers to subscribe, modify and unsubscribe for application events; and
- notifies NF service consumers with a corresponding subscription about observed events on the NEF.

The types of observed events applicable for NEF include:

- Service experience;
- UE mobility;
- UE communication;
- Exceptions;
- User Data Congestion;
- Dispersion;
- Performance Data information; and
- Collective Behaviour information.

The target of the event reporting may include one or more UE(s), a group of UEs or any UE (i.e. all UEs). When an event to which the NF service consumer has subscribed occurs, the NEF reports the requested information to the NF service consumer based on the event reporting information definition requested by the NF service consumer.


#### 4.2.1.2 Service Architecture

The 5G System Architecture is defined in 3GPP TS 23.501 [2]. The Network Data Analytics Exposure architecture is defined in 3GPP TS 23.288 [14].


The Nnef\_EventExposure service is part of the Nnef service-based interface exhibited by the Network Exposure Function (NEF).

Known consumers of the Nnef\_EventExposure service are:

- Network Data Analytics Function (NWDAF)

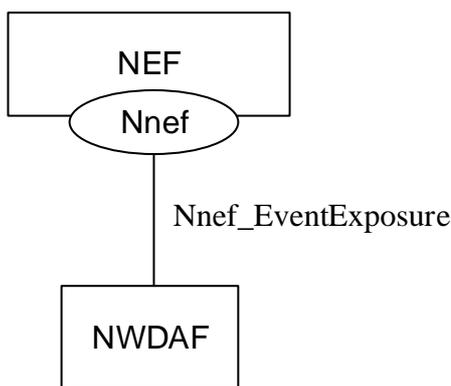

**Figure 4.2.1.2-1: Reference Architecture for the Nnef\_EventExposure Service; SBI representation**

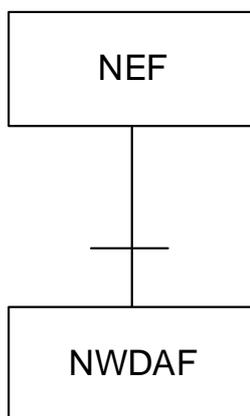

**Figure 4.2.1.2-2: Reference Architecture for the Nnef\_EventExposure Service: reference point representation**

### 4.2.1.3 Network Functions

#### 4.2.1.3.1 Network Exposure Function (NEF)

The Network Exposure Function (NEF) is a functional element that provides application or user related information to the NF service consumers as defined in this specification.

The NEF allows the NF consumer(s) to (un)subscribe to notifications of monitoring observed event, and sends the notification to the NF consumer(s) when a subscribed event is detected.

#### 4.2.1.3.2 NF Service Consumers

The known NF service consumers are as follows:

The Network Data Analytics Function (NWDAF):

- supports (un)subscribing to notifications of subscribed event(s) from the NEF;
- supports receiving the notifications of subscribed event(s) from the NEF.

## 4.2.2 Service Operations

### 4.2.2.1 Introduction

Service operations defined for the Nnef\_EventExposure Service are shown in table 4.2.2.1-1.

**Table 4.2.2.1-1: Nnef\_EventExposure Service Operations**

<b>Service Operation Name</b>	<b>Description</b>	<b>Initiated by</b>
Nnef_EventExposure_Subscribe	This service operation is used by an NF service consumer to subscribe to, or modify a subscription in the NEF for event notifications on a specified application or user related event.	NF service consumer
Nnef_EventExposure_Unsubscribe	This service operation is used by an NF service consumer to unsubscribe from event notifications.	NF service consumer
Nnef_EventExposure_Notify	This service operation is used by the NEF to report application or user related event(s) to the NF service consumer which has subscribed to the event report service.	NEF

## 4.2.2.2 Nnef\_EventExposure\_Subscribe service operation

### 4.2.2.2.1 General

This service operation is used by an NF service consumer to subscribe to notifications on specified event(s) or modify an existing subscription.

The following are the types of events for which a subscription to notifications can be created:


- Service experience;
- UE mobility;
- UE communication;
- Exceptions;
- User Data Congestion;
- Dispersion;
- Performance Data information; and
- Collective Behaviour information.

The following procedures using the Nnef\_EventExposure\_Subscribe service operation are supported:

- creating a new subscription;
- modifying an existing subscription.

### 4.2.2.2.2 Creating a new subscription

Figure 4.2.2.2.2-1 illustrates the creation of a Network Exposure Event Subscription.

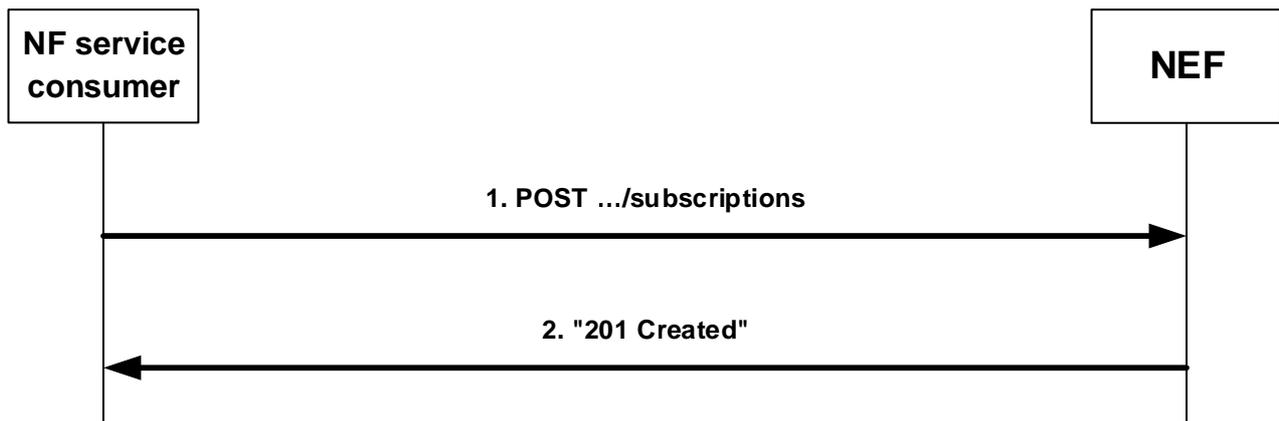

**Figure 4.2.2.2-1: Creation of a subscription**

To subscribe to event notifications, the NF service consumer shall send an HTTP POST request to the NEF with: "{apiRoot}/nnef-eventexposure/<apiVersion>/subscriptions" as request URI as shown in step 1 of figure 4.2.2.2-1, and the "NefEventExposureSubsc" data structure as request body.

The "NefEventExposureSubsc" data structure shall include:

- a URI where to receive the requested notifications as "notifUri" attribute;
- a Notification Correlation Identifier assigned by the NF service consumer for the requested notifications as "notifId" attribute; and
- description of subscribed event information as "eventsSubs" attribute by using one or more "NefEventSubs" data.

The "NefEventExposureSubsc" data structure may also include:

- the description of the event reporting information as "eventsRepInfo" attribute.

The "NefEventSubs" data structure shall include:

- an event to subscribe to as a "event" attribute; and
- event filter information as "eventFilter" attribute associated with the event.

The "eventsRepInfo" attribute may include:

- event notification method (periodic, one time, on event detection) as "notifMethod" attribute;
- Maximum Number of Reports as "maxReportNbr" attribute;
- Monitoring Duration as "monDur" attribute;
- repetition period for periodic reporting as "repPeriod" attribute;
- immediate reporting indication as "immRep" attribute;
- sampling ratio as "sampRatio" attribute;
- partitioning criteria for partitioning the UEs before performing sampling as "partitionCriteria" attribute if the EneNA feature is supported;
- group reporting guard time as "grpRepTime" attribute; and/or
- a notification flag as "notifFlag" attribute if the EneNA feature is supported.

If the NEF cannot successfully fulfil the received HTTP POST request due to an internal error or an error in the HTTP POST request, the NEF shall send an HTTP error response as specified in clause 5.1.7.

Upon successful reception of an HTTP POST request with "{apiRoot}/nnef-eventexposure/<apiVersion>/subscriptions" as request URI and "NefEventExposureSubsc" data structure as request body, the NEF shall create a new "Individual

Network Exposure Event Subscription" resource, store the subscription and send an HTTP "201 Created" response, as shown in step 2 of figure 4.2.2.2-1. The NEF shall include in the "201 Created" response:

- a Location header field; and
- an "NefEventExposureSubsc" data type in the payload body.

The Location header field shall contain the URI of the created individual application session context resource i.e. "{apiRoot}/nnef-eventexposure/<apiVersion>/subscriptions/{subscriptionId}".

The "NefEventExposureSubsc" data type payload body shall contain the representation of the created "Individual Network Exposure Event Subscription".

When the "monDur" attribute is included in the response by the NEF, it represents NEF selected expiry time that is equal or less than the expiry time received in the request.

When the "immRep" attribute is included and set to "true" in the subscription and the subscribed events are available, the NEF shall include the reports of the events subscribed, if available, in the HTTP POST response.


When the sampling ratio attribute, as "sampRatio", is included in the subscription without a "partitionCriteria" attribute, the NEF shall select a random subset of UEs among the target UEs according to the sampling ratio and only report the event(s) related to the selected subset of UEs. If the "partitionCriteria" attribute is additionally included, then the NEF shall first partition the UEs according to the value of the "partitionCriteria" attribute and then select a random subset of UEs from each partition according to the sampling ratio and only report the event(s) related to the selected subsets of UEs.

When the group reporting guard time, as "grpRepTime" attribute, is included in the subscription, the NEF shall accumulate all the event reports for the target UEs until the group reporting guard time expires. Then, the NEF shall notify the NF service consumer using the Nnef\_EventExposure\_Notify service operation, as described in clause 4.2.2.4.

When the "notifFlag" attribute is included and set to "DEACTIVATE" in the request, the NEF shall mute the event notification and store the available events.

#### 4.2.2.2.3 Modifying an existing subscription

Figure 4.2.2.2.3-1 illustrates the modification of an existing subscription.

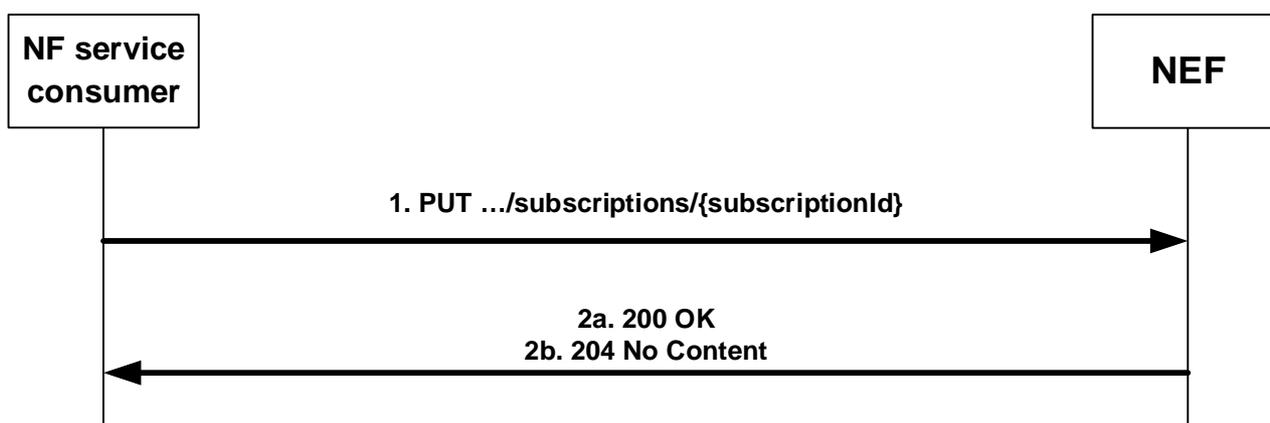

**Figure 4.2.2.2.3-1: Modification of an existing subscription**

To modify an existing subscription to event notifications, the NF service consumer shall send an HTTP PUT request with: "{apiRoot}/nnef-eventexposure/<apiVersion>/subscriptions/{subscriptionId}" as request URI, as shown in step 1 of figure 4.2.2.2.3-1, where "{subscriptionId}" is the subscription correlation ID of the existing subscription. The "NefEventExposureSubsc" data structure is included as request body as described in clause 4.2.2.2.2.

NOTE 1: An alternate NF service consumer than the one that requested the generation of the subscription resource can send the PUT request.

NOTE 2: The "notifUri" attribute within the NefEventExposureSubsc data structure can be modified to request that subsequent notifications are sent to a new NF service consumer.

NOTE 3: The "monDur" attribute within the NefEventExposureSubsc data structure can be modified to extend the expiry time to keep receiving notifications.

If the NEF cannot successfully fulfil the received HTTP PUT request due to an internal error or an error in the HTTP PUT request, the NEF shall send an HTTP error response as specified in clause 5.1.7.

If the feature "ES3XX" is supported, and the NEF determines the received HTTP PUT request needs to be redirected, the NEF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

Upon successful reception of an HTTP PUT request with: "{apiRoot}/nef-eventexposure/<apiVersion>/subscriptions/{subscriptionId}" as request URI and "NefEventExposureSubsc" data structure as request body, the NEF shall update the subscription and send an HTTP "200 OK" response with the "NefEventExposureSubsc" data structure as response body containing the representation of the modified "Individual Network Exposure Event Subscription", or an HTTP "204 No Content" response, as shown in step 2 of figure 4.2.2.2.3-1.

When the "monDur" attribute is included in the response by the NEF, it represents NEF selected expiry time that is equal or less than the expiry time received in the request.

When the "immRep" attribute is included and sets to "true" in the subscription and the subscribed events are available, the NEF shall include the reports of the events subscribed, if available, in the HTTP PUT response.

When the sampling ratio, as "sampRatio" attribute, is included in the subscription without a "partitionCriteria" attribute, the NEF shall select a random subset of UEs among the target UEs according to the sampling ratio and only report the event(s) related to the selected subset of UEs. If the "partitionCriteria" attribute is additionally included, then the NEF shall first partition the UEs according to the value of the "partitionCriteria" attribute and then select a random subset of UEs from each partition according to the sampling ratio and only report the event(s) related to the selected subsets of UEs.

When the group reporting guard time, as "grpRepTime" attribute, is included in the subscription, the NEF shall accumulate all the event reports for the target UEs until the group reporting guard time expires. Then, the NEF shall notify the NF service consumer using the Nef\_EventExposure\_Notify service operation, as described in clause 4.2.2.4.

When the "notifFlag" attribute is included, and set to "DEACTIVATE" in the request, the NEF shall mute the event notification and store the available events; if it is set to "RETRIEVAL" in the request, the NEF shall send the stored events to the NF service consumer, and mute the event notification again and store available events.

### 4.2.2.3 Nef\_EventExposure\_Unsubscribe service operation

#### 4.2.2.3.1 General


This service operation is used by an NF service consumer to unsubscribe from event notifications.

The following procedure using the Nef\_EventExposure\_Unsubscribe service operation is supported:

- unsubscription from event notifications.

#### 4.2.2.3.2 Unsubscription from event notifications

Figure 4.2.2.3.2-1 illustrates the unsubscription from event notifications.

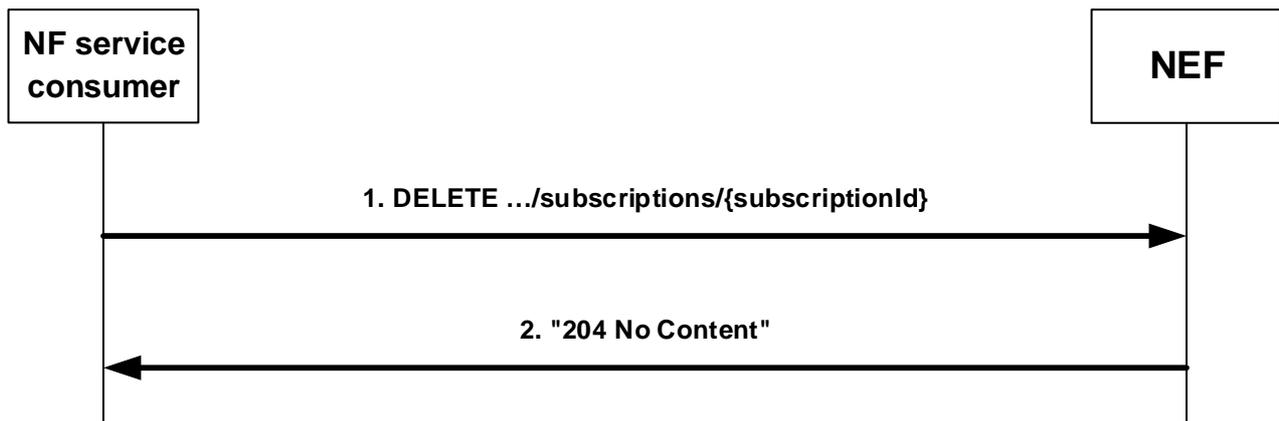

**Figure 4.2.2.3.2-1: Unsubscription from event notifications**

To unsubscribe from event notifications, the NF service consumer shall send an HTTP DELETE request with "{apiRoot}/nnef-eventexposure/<apiVersion>/subscriptions/{subscriptionId}" as request URI, as shown in step 1 of figure 4.2.2.3.2-1, where "{subscriptionId}" is the subscription correlation identifier of the existing subscription resource that is to be deleted.

If the NEF cannot successfully fulfil the received HTTP DELETE request due to an internal error or an error in the HTTP DELETE request, the NEF shall send an HTTP error response as specified in clause 5.1.7.

If the feature "ES3XX" is supported, and the NEF determines the received HTTP DELETE request needs to be redirected, the NEF shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

Upon successful reception of an HTTP DELETE request with: "{apiRoot}/nnef-eventexposure/<apiVersion>/subscriptions/{subscriptionId}" as request URI, the NEF shall remove the corresponding subscription and send an HTTP "204 No Content" response, as shown in step 2 of figure 4.2.2.3.2-1.

#### 4.2.2.4 Nnef\_EventExposure\_Notify service operation

##### 4.2.2.4.1 General


The Nnef\_EventExposure\_Notify service operation enables the NEF to notify the NF service consumer(s) that the previously subscribed application related event occurred.

The following procedure using the Nnef\_EventExposure\_Notify service operation is supported:

- notification about subscribed events.

##### 4.2.2.4.2 Notification about subscribed events

Figure 4.2.2.4.2-1 illustrates the notification about subscribed events.

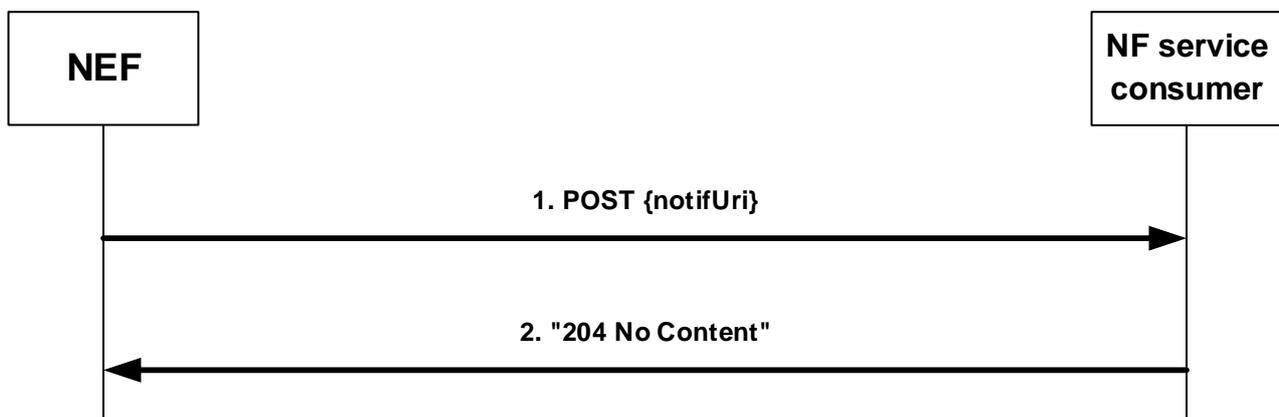

**Figure 4.2.2.4.2-1: Notification about subscribed events**

If the NEF observes application related event(s) for which an NF service consumer has subscribed, the NEF shall send an HTTP POST request as shown in step 1 of figure 4.2.2.4.2-1, with the "{notifUri}" as request URI containing the value previously provided by the NF service consumer within the corresponding subscription, and the "NefEventExposureNotif" data structure.

The "NefEventExposureNotif" data structure shall include:

- notification correlation ID provided by the NF service consumer during the subscription as "notifId" attribute; and
- information about the observed event(s) within the "eventNotifs" attribute that shall contain for each observed event an "NefEventNotification" data structure that shall include:
  - the application related event as "event" attribute;
  - the time at which the event was observed encoded as "timeStamp" attribute;
  - if the "event" attribute is "SVC\_EXPERIENCE", service experience information about the application involved in the reported event in the "svcExprcInfos" attribute;
  - if the "event" attribute is "UE\_MOBILITY", UE mobility information associated with the application as "ueMobilityInfos" attribute;
  - if the "event" attribute is "UE\_COMM", UE communication information associated with the application as "ueCommInfos" attribute;
  - if the "event" attribute is "EXCEPTIONS", exceptions information associated with a service flow as "excepInfos" attribute;
  - if the "event" attribute is "PERF\_DATA", Performance Data Analytics related information as "perfDataInfos" attribute;
  - if the "event" attribute is "COLLECTIVE\_BEHAVIOUR", collective behaviour information associated with the UEs and its applications as "collBhvrInfs" attribute;
  - if the "event" attribute is "USER\_DATA\_CONGESTION", user data congestion information collected for an AF application as "congestionInfos" attribute; and
  - if the "event" attribute is "DISPERSION", UE dispersion information collected for an AF as "dispersionInfos" attribute.

If the NF service consumer cannot successfully fulfil the received HTTP POST request due to an internal error or an error in the HTTP POST request, the NF service consumer shall send an HTTP error response as specified in clause 5.1.7.

If the feature "ES3XX" is supported, and the NF service consumer determines the received HTTP POST request needs to be redirected, the NF service consumer shall send an HTTP redirect response as specified in clause 6.10.9 of 3GPP TS 29.500 [4].

Upon successful reception of an HTTP POST request with "{notifUri}" as request URI and "NefEventExposureNotif" data structure as request body, the NF service consumer shall send an HTTP "204 No Content" response, as shown in step 2 of figure 4.2.2.4.2-1, in case of a successful processing.

## 4.3 Nnef\_EASDeployment Service

### 4.3.1 Service Description

#### 4.3.1.1 Overview

The Nnef\_EASDeployment service, as defined in 3GPP TS 23.502 [3], is provided by the Network Exposure Function (NEF). This service allows the SMF to subscribe/unsubscribe the notification of AF provisioned EAS Deployment information, and for the NEF to notify the AF provisioned EAS Deployment information to the subscribed SMF.


### 4.3.1.2 Service Architecture

The 5G System Architecture is defined in 3GPP TS 23.501 [2].


The Nnef\_EASDeployment service is part of the Nnef service-based interface exhibited by the Network Exposure Function (NEF).

Known consumer of the Nnef\_EASDeployment service is:

- Session Management Function (SMF)

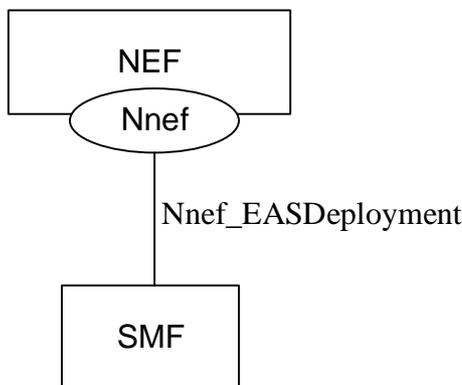

**Figure 4.3.1.2-1: Reference Architecture for the Nnef\_EASDeployment Service; SBI representation**

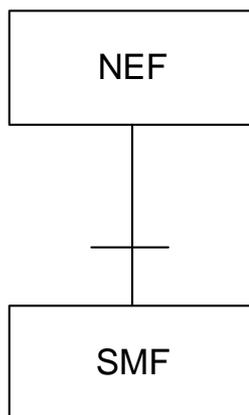

**Figure 4.3.1.2-2: Reference Architecture for the Nnef\_EASDeployment Service: reference point representation**

### 4.3.1.3 Network Functions

#### 4.3.1.3.1 Network Exposure Function (NEF)

The Network Exposure Function (NEF) is a functional element that support for the NF service consumer (i.e SMF) subscribing to the notification of the AF provisioned EAS Deployment Information and provide EAS Deployment Information change notification to the NF service consumer as defined in this specification.

#### 4.3.1.3.2 NF Service Consumers

The known NF service consumers are as follows:

The Session Management Function (SMF):

- supports (un)subscribing to notifications of subscribed event(s) from the NEF.

- supports receiving the notifications of subscribed event(s) from the NEF.

## 4.3.2 Service Operations

### 4.3.2.1 Introduction

Service operations defined for the Nnef\_EASDeployment Service are shown in table 4.3.2.1-1.

**Table 4.3.2.1-1: Nnef\_EventExposure Service Operations**

Service Operation Name	Description	Initiated by
Nnef_EASDeployment_Subscribe	This service operation is used by an NF service consumer to explicitly subscribe the notification of changes of EAS Deployment Information.	NF service consumer
Nnef_EASDeployment_Unsubscribe	This service operation is used by an NF service consumer to explicitly unsubscribe the notification of changes of EAS Deployment Information.	NF service consumer
Nnef_EASDeployment_Notify	This service operation is used by the NEF to provide subscribed event information, e.g. updated EAS Deployment Information to the NF service consumer.	NEF

### 4.3.2.2 Nnef\_EASDeployment\_Subscribe service operation

#### 4.3.2.2.1 General

This service operation is provided by the NEF for NF consumers to explicitly subscribe the notification of changes of EAS Deployment Information.

#### 4.3.2.2.2 Creating a new subscription

In order to subscribe to EAS Deployment Information change event, the SMF shall send an HTTP POST request message to the NEF for the "EAS Deployment Event Subscriptions" resource. The HTTP POST message shall include EasDeploySubData data structure as request body. The EasDeploySubData data structure shall include:

- Event Id in the "eventId" attribute;
- An notification correlation ID provided by the NF service consumer during the subscription as "notifId" attribute; and
- An URI to receive the subscribed EAS Deployment information change notifications as "notifUri" attribute.

and may include:

- an indicator to immediately report the current status of EAS Deployment Information if available, as "immRep" attribute;
- (list of) DNN and/or S-NSSAI combination as "dnnSnsaiInfos" attribute;
- identification of an application as "appId" attribute; and/or
- an internal Group Identifier as "interGroupId" attribute.

Upon receipt of the HTTP request from the SMF, if the SMF is validated, the NEF shall interact with the UDR by invoking the Nudr\_DataRepository service as described in 3GPP TS 29.504 [20] to fetch the EAS Deployment Information in the application data in the UDR.

After receiving a successful response from the UDR, the NEF shall create a new subscription and assign a subscription identifier for the "Individual EAS Deployment Event Subscription" resource. Then the NEF shall send a HTTP "201 Created" response with EASDeploySubData data structure as response body and a Location header field containing the URI of the created individual subscription resource to the NF service consumer. If the immediate report indicator is

included in the subscription request, the NEF shall include the current available status of EAS Deployment Information in the response body.

If the NEF receives an error code from the UDR, the NEF shall take proper error handling actions and shall respond to the SMF with a proper error status code.

### 4.3.2.3 Nnef\_EASDeployment\_Unsubscribe service operation

#### 4.3.2.3.1 General

This service operation is used by an NF service consumer (i.e. SMF) to explicitly unsubscribe the notification of changes of EAS Deployment Information.

The following procedure using the Nnef\_EASDeployment\_Unsubscribe service operation is supported:

- unsubscription from the notification of changes of EAS Deployment Information.

#### 4.3.2.3.2 Unsubscription of notification of changes of EAS Deployment Information

In order to delete an existing subscription to EAS Deployment Information change event, the NF service consumer shall send an HTTP DELETE request message to the individual resource URI "{apiRoot}/nnef-eas-deployment/v1/subscriptions/{subscriptionId}" in which the "{subscriptionId}" is the subscription correlation identifier of the existing subscription resource that is to be deleted.

The NEF shall delete the individual resource and shall respond to the NF service consumer with an HTTP "204 No Content" response message.

If the NEF cannot delete the individual resource, shall take proper error handling actions and shall respond to the NF service consumer with a proper error status code.

### 4.3.2.4 Nnef\_EASDeployment\_Notify service operation

#### 4.3.2.4.1 General

The Nnef\_EASDeployment\_Notify service operation enables the NEF to notify the subscribed event information, e.g. updated EAS Deployment Information to the NF Consumer.

The following procedure using the Nnef\_EASDeployment\_Notify service operation is supported:

- notification about subscribed EAS Deployment Information change.

#### 4.3.2.4.2 Notification of changes of EAS Deployment Information

If there is current status of EAS Deployment Information available and immediate report is required, the NEF may immediately provide a notification to the subscribed NF service consumer by sending an HTTP POST message that include the EasDeployInfoNotif data structure in the request body to notify the current status of EAS Deployment information to the NF service consumer.

If the immediate report is not required or the current status of EAS Deployment Information is not available, when the EAS Deployment information was changed, the NEF shall provide a notification to the subscribed NF service consumer by sending an HTTP POST message that include the EasDeployInfoNotif data structure in the request body to notify the EAS Deployment information changes to the NF service consumer.

The EasDeployInfoNotif data structure shall include the subscribed Event ID and the EAS Deployment Information.

Upon receipt of the EAS Deployment event notification, the NF service consumer shall respond with a "204 No Content" status code to confirm the received notification.

---

## 5 API Definitions

### 5.1 Nnef\_EventExposure Service API

#### 5.1.1 Introduction

The Nnef\_EventExposure service shall use the Nnef\_EventExposure API.

The API URI of the Nnef\_EventExposure API shall be:

**{apiRoot}/<apiName>/<apiVersion>**

The request URIs used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

**{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>**

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].
- The <apiName> shall be "nnef-eventexposure".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 5.1.3.

#### 5.1.2 Usage of HTTP

##### 5.1.2.1 General

HTTP/2, IETF RFC 7540 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Nnef\_EventExposure API is contained in Annex A.

##### 5.1.2.2 HTTP standard headers

###### 5.1.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

###### 5.1.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 7807 [13].


##### 5.1.2.3 HTTP custom headers

The Nnef\_EventExposure API shall support mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [4] and may support HTTP custom header fields specified in subclause 5.2.3.3 of 3GPP TS 29.500 [4].

In this Release of the specification, no specific custom headers are defined for the Nnef\_EventExposure API.

## 5.1.3 Resources

### 5.1.3.1 Overview

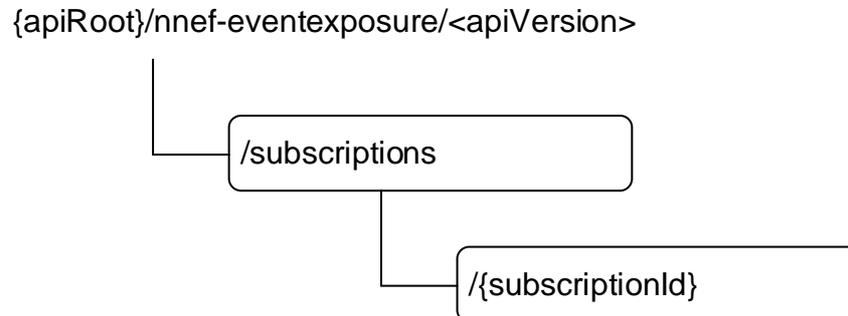

**Figure 5.1.3.1-1: Resource URI structure of the Nnef\_EventExposure API**

Table 5.1.3.1-1 provides an overview of the resources and applicable HTTP methods.

**Table 5.1.3.1-1: Resources and methods overview**

Resource name	Resource URI	HTTP method or custom operation	Description
Network Exposure Event Subscriptions	/subscriptions	POST	Creates a subscription to notifications on application or user related event(s), i.e. creation of an Individual Network Exposure Event Subscription resource.
Individual Network Exposure Event Subscription	/subscriptions/{subscriptionId}	GET	Reads an Individual Network Exposure Event Subscription resource.
		PUT	Modifies an Individual Network Exposure Event Subscription.
		DELETE	Cancels an individual subscription to notifications of subscribed event.

### 5.1.3.2 Resource: Network Exposure Event Subscriptions

#### 5.1.3.2.1 Description

The resource represents the collection of Network Exposure Event subscriptions of the Nnef\_EventExposure service. It allows NF service consumers to create a new subscription to notifications on application or user related event(s).

#### 5.1.3.2.2 Resource Definition

Resource URI: {apiRoot}/nnef-eventexposure/<apiVersion>/subscriptions

This resource shall support the resource URI variables defined in table 5.1.3.2.2-1.

**Table 5.1.3.2.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 5.1.1
apiVersion	string	See clause 5.1.1

## 5.1.3.2.3 Resource Standard Methods

## 5.1.3.2.3.1 POST

This method shall support the URI query parameters specified in table 5.1.3.2.3.1-1.

**Table 5.1.3.2.3.1-1: URI query parameters supported by the <method 1> method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.1.3.2.3.1-2 and the response data structures and response codes specified in table 5.1.3.2.3.1-3.

**Table 5.1.3.2.3.1-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
NefEventExposureSubsc	M	1	Contains the information required for the creation of a new Individual Network Exposure Event Subscription resource.

**Table 5.1.3.2.3.1-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
NefEventExposureSubsc	M	1	201 Created	Contains the representation of the Individual Network Exposure Event Subscription resource.
NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 5.1.3.2.3.1-4: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/nnef-eventexposure/<apiVersion>/subscriptions/{subscriptionId}

## 5.1.3.3 Resource: Individual Network Exposure Event Subscription

## 5.1.3.3.1 Description

The resource represents an individual Network Exposure Event subscription of the Nnef\_EventExposure service. It allows NF service consumers to read/modify/cancel a subscription to notifications on application or user related event(s).

## 5.1.3.3.2 Resource Definition

Resource URI: {apiRoot}/nnef-eventexposure/<apiVersion>/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.1.3.3.2-1.

**Table 5.1.3.3.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 5.1.1
apiVersion	string	See clause 5.1.1
subscriptionId	string	Identifies a subscription to the NEF event exposure service.

## 5.1.3.3.3 Resource Standard Methods

## 5.1.3.3.3.1 GET

This method shall support the URI query parameters specified in table 5.1.3.3.3.1-1.

**Table 5.1.3.3.3.1-1: URI query parameters supported by the GET method on this resource**

Name	Data type	P	Cardinality	Description
supp-feat	SupportedFeatures	O	0..1	The features supported by the NF service consumer.

This method shall support the request data structures specified in table 5.1.3.3.3.1-2 and the response data structures and response codes specified in table 5.1.3.3.3.1-3.

**Table 5.1.3.3.3.1-2: Data structures supported by the GET Request Body on this resource**

Data type	P	Cardinality	Description
n/a			

**Table 5.1.3.3.3.1-3: Data structures supported by the GET Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
NefEventExposureSubsc	M	1	200 OK	Contains the representation of the Individual Network Exposure Event Subscription resource.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF (service) instance. Applicable if the feature "ES3XX" is supported.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF (service) instance. Applicable if the feature "ES3XX" is supported.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 5.1.3.3.3.1-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**Table 5.1.3.3.3.1-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

## 5.1.3.3.3.2 PUT

This method shall support the URI query parameters specified in table 5.1.3.3.3.2-1.

**Table 5.1.3.3.3.2-1: URI query parameters supported by the PUT method on this resource**

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.1.3.3.3.2-2 and the response data structures and response codes specified in table 5.1.3.3.3.2-3.

**Table 5.1.3.3.3.2-2: Data structures supported by the PUT Request Body on this resource**

Data type	P	Cardinality	Description
NefEventExposureSubsc	M	1	Modifies the existing Individual Network Exposure Event Subscription resource.

**Table 5.1.3.3.3.2-3: Data structures supported by the PUT Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
NefEventExposureSubsc	M	1	200 OK	Successful case. The Individual Network Exposure Event Subscription resource was modified and a representation is returned.
n/a			204 No Content	Successful case. The Individual Network Exposure Event Subscription resource was modified.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF (service) instance. Applicable if the feature "ES3XX" is supported.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during subscription modification. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF (service) instance. Applicable if the feature "ES3XX" is supported.
NOTE: The mandatory HTTP error status codes for the PUT method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 5.1.3.3.3.2-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**Table 5.1.3.3.3.2-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

### 5.1.3.3.3.3 DELETE

This method shall support the URI query parameters specified in table 5.1.3.3.3.3-1.

**Table 5.1.3.3.3.3-1: URI query parameters supported by the DELETE method on this resource**

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.1.3.3.3.3-2 and the response data structures and response codes specified in table 5.1.3.3.3.3-3.

**Table 5.1.3.3.3.3-2: Data structures supported by the DELETE Request Body on this resource**

Data type	P	Cardinality	Description
n/a			

**Table 5.1.3.3.3.3-3: Data structures supported by the DELETE Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case. The Individual Network Exposure Event Subscription resource matching the subscriptionId was deleted.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF (service) instance. Applicable if the feature "ES3XX" is supported.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF (service) instance. Applicable if the feature "ES3XX" is supported.
NOTE: The mandatory HTTP error status code for the DELETE method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 5.1.3.3.3.3-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**Table 5.1.3.3.3.3-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

## 5.1.4 Custom Operations without associated resources

None.

## 5.1.5 Notifications

### 5.1.5.1 General

Notifications shall comply to clause 6.2 of 3GPP TS 29.500 [4] and clause 4.6.2.3 of 3GPP TS 29.501 [5].

Table 5.1.5.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Network Exposure Event Notification	{notifUri}	POST	Provides Information about observed events.

## 5.1.5.2 Network Exposure Event Notification

### 5.1.5.2.1 Description

The Network Exposure Event Notification is used by the NEF to report one or several observed Events to a NF service consumer that has subscribed to such Notifications.

### 5.1.5.2.2 Target URI

The Notification URI "{**notifUri**}" shall be used with the callback URI variables defined in table 5.1.5.2.2-1.

Table 5.1.5.2.2-1: Callback URI variables for this resource

Name	Data type	Definition
notifUri	Uri	The Notification Uri as assigned by the NF service consumer during the subscription service operation and described within the NefEventExposureSubsc data type (see table 5.1.6.2.2-1).

### 5.1.5.2.3 Standard Methods

#### 5.1.5.2.3.1 POST

This method shall support the request data structures specified in table 5.1.5.2.3.1-1 and the response data structures and response codes specified in table 5.1.5.2.3.1-1.

Table 5.1.5.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
NefEventExposureNotif	M	1	Provides Information about observed events

Table 5.1.5.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The receipt of the Notification is acknowledged.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF consumer (service) instance where the notification should be sent. Applicable if the feature "ES3XX" is supported.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF consumer (service) instance where the notification should be sent. Applicable if the feature "ES3XX" is supported.

NOTE: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.

**Table 5.1.5.2.3.1-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the notification request is redirected.

**Table 5.1.5.2.3.1-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the notification request is redirected.

## 5.1.6 Data Model

### 5.1.6.1 General

This clause specifies the application data model supported by the API.

Table 5.1.6.1-1 specifies the data types defined for the Nnef\_EventExposure service based interface protocol.

**Table 5.1.6.1-1: Nnef\_EventExposure specific Data Types**

Data type	Section defined	Description	Applicability
NefEvent	5.1.6.3.3	Represents Network Exposure Events.	
NefEventExposureNotif	5.1.6.2.3	Represents notifications on network exposure event(s) that occurred for an Individual Network Exposure Event Subscription resource.	
NefEventExposureSubsc	5.1.6.2.2	Represents an Individual Network Exposure Event Subscription resource.	
NefEventFilter	5.1.6.2.7	Represents event filter information for an event.	
NefEventNotification	5.1.6.2.4	Represents information related to an event to be reported.	
NefEventSubs	5.1.6.2.5	Represents an event to be subscribed and the related event filter information	
PerformanceDataInfo	5.1.6.2.12	Contains Performance Data Analytics related information collection	PerformanceData
ServiceExperienceInfo	5.1.6.2.9	Contains service experience information associated with an application.	ServiceExperience
TargetUeIdentification	5.1.6.2.8	Identifies the UE to which the request applies.	
UeCommunicationInfo	5.1.6.2.6	Contains UE communication information associated with an application.	UeCommunication
UeMobilityInfo	5.1.6.2.10	Contains UE mobility information associated with an application.	UeMobility
UeTrajectoryInfo	5.1.6.2.11	Contains UE trajectory information.	UeMobility

Table 5.1.6.1-2 specifies data types re-used by the Nnef\_EventExposure service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Nnef\_EventExposure service based interface.

Table 5.1.6.1-2: Nnef\_EventExposure re-used Data Types

Data type	Reference	Comments	Applicability
AddrFqdn	3GPP TS 29.517 [18]	IP address and/or FQDN.	
ApplicationId	3GPP TS 29.571 [16]	Application identifier	
CollectiveBehaviourFilter	3GPP TS 29.517 [18]	Contains the parameter type and value pair to express the collective behaviour event filters.	CollectiveBehaviour
CollectiveBehaviourInfo	3GPP TS 29.517 [18]	Contains the collective behaviour analytics information.	CollectiveBehaviour
CommunicationCollection	3GPP TS 29.517 [18]	Contains communication information.	UeCommunication
DateTime	3GPP TS 29.571 [16]	Contains a date and a time.	
Dnai	3GPP TS 29.571 [16]		
DispersionCollection	3GPP TS 29.517 [18]	Contains dispersion collection information.	Dispersion
ExceptionInfo	3GPP TS 29.517 [18]	Represents exception information for a service flow.	Exceptions
GroupId	3GPP TS 29.571 [16]	Contains a Group identifier.	
IpAddr	3GPP TS 29.571 [16]	Identifies the IP address of a UE.	PerformanceData
NetworkAreaInfo	3GPP TS 29.554 [21]	Represents a network area information.	
PacketDelBudget	3GPP TS 29.571 [16]	Indicates average Packet Delay.	PerformanceData
PacketLossRate	3GPP TS 29.571 [16]	Indicates average Loss Rate.	PerformanceData
PerformanceData	3GPP TS 29.517 [18]	Contains Performance Data	PerformanceData
RedirectResponse	3GPP TS 29.571 [16]	Contains redirection related information.	ES3XX
ReportingInformation	3GPP TS 29.523 [22]	Represents the type of reporting the subscription requires.	
Supi	3GPP TS 29.571 [16]	Contains a SUPI.	
SupportedFeatures	3GPP TS 29.571 [16]	Indicates the features supported.	
ServiceExperienceInfoPerFlow	3GPP TS 29.517 [18]	Contains service experience information associated with a service flow.	ServiceExperience
UserDataCongestionCollection	3GPP TS 29.517 [18]	Contains User Data Congestion Analytics related information collection.	UserDataCongestion
UserLocation	3GPP TS 29.571 [16]	Contains user location information.	UeMobility
Uri	3GPP TS 29.571 [16]	Contains a URI.	

## 5.1.6.2 Structured data types

### 5.1.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

## 5.1.6.2.2 Type: NefEventExposureSubsc

**Table 5.1.6.2.2-1: Definition of type NefEventExposureSubsc**

Attribute name	Data type	P	Cardinality	Description	Applicability
eventsSubs	array(NefEventSubs)	M	1..N	Subscribed events and the related event filters.	
eventsRepInfo	ReportingInformation	O	0..1	Represents the reporting requirements of the subscription. If omitted, the default values within the ReportingInformation data type apply.	
notifUri	Uri	M	1	Notification URI for event reporting.	
eventNotifs	array(NefEventNotification)	C	1..N	Represents the Events to be reported. Shall only be present if the immediate reporting indication in the "immRep" attribute within the "eventsRepInfo" attribute sets to true in the event subscription, and the reports are available.	
notifId	string	M	1	Notification Correlation ID assigned by the NF service consumer.	
supFeat	SupportedFeatures	C	0..1	This IE represents a list of Supported features used as described in clause 5.8. Shall be present in the HTTP POST request/response; or in the HTTP GET response if the "sup-feat" attribute query parameter is included in the HTTP GET request. (NOTE)	
NOTE:	In the HTTP POST request it represents the set of NF service consumer supported features. In the HTTP POST and GET responses it represents the set of features supported by both the NF service consumer and the NEF.				

## 5.1.6.2.3 Type: NefEventExposureNotif

**Table 5.1.6.2.3-1: Definition of type NefEventExposureNotif**

Attribute name	Data type	P	Cardinality	Description	Applicability
notifId	string	M	1	Notification Correlation ID assigned by the NF service consumer.	
eventNotifs	array(NefEventNotification)	M	1..N	Represents the Events to be reported according to the subscription corresponding to the Notification Correlation ID.	

## 5.1.6.2.4 Type: NefEventNotification

Table 5.1.6.2.4-1: Definition of type NefEventNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
event	NefEvent	M	1	Represents the reported application related event.	
timeStamp	DateTime	M	1	Time at which the event is observed.	
svcExprclnfos	array(ServiceExperienceInfo)	C	1..N	Contains the service experience information. Shall be present if the "event" attribute sets to "SVC_EXPERIENCE"	ServiceExperience
ueMobilityInfos	array(UeMobilityInfo)	C	1..N	Contains the UE mobility information. Shall be present if the "event" attribute sets to "UE_MOBILITY"	UeMobility
ueCommInfos	array(UeCommunicationInfo)	C	1..N	Contains the application communication information. Shall be present if the "event" attribute sets to "UE_COMM"	UeCommunication
exceptInfos	array(ExceptionInfo)	C	1..N	Each element represents the exception information for a service flow. Shall be present if the "event" attribute sets to "EXCEPTIONS".	Exceptions
congestionInfos	array(UserDataCongestionCollection)	C	1..N	Each element represents the user data congestion information for an AF application. Shall be present if the "event" attribute sets to "USER_DATA_CONGESTION".	UserDataCongestion
perfDataInfos	array(PerformanceDataInfo)	C	1..N	Each element represents the performance data information collected for an AF application.	PerformanceData
dispersionInfos	array(DispersionCollection)	C	1..N	Each element represents the UE dispersion information collected for an AF. Shall be present if the "event" attribute sets to "DISPERSION".	Dispersion
collBhvrlnfos	array(CollectiveBehaviourInfo)	C	1..N	Each element represents the collective behaviour information related to a set of UEs, applications. Shall be present if the "event" attribute sets to "COLLECTIVE_BEHAVIOUR".	CollectiveBehaviour

## 5.1.6.2.5 Type NefEventSubs

Table 5.1.6.2.5-1: Definition of type NefEventSubs

Attribute name	Data type	P	Cardinality	Description	Applicability
event	NefEvent	M	1	Subscribed event.	
eventFilter	NefEventFilter	C	0..1	Represents the event filter information associated with each event. Shall be present if "event" sets to "SVC_EXPERIENCE", "UE_MOBILITY", "UE_COMM", "EXCEPTIONS", "USER_DATA_CONGESTION", "PERF_DATA" "COLLECTIVE_BEHAVIOUR" or "DISPERSION".	ServiceExperience UeCommunication UeMobility Exceptions UserDataCongestion PerformanceData Dispersion CollectiveBehaviour

## 5.1.6.2.6 Type UeCommunicationInfo

Table 5.1.6.2.6-1: Definition of type UeCommunicationInfo

Attribute name	Data type	P	Cardinality	Description	Applicability
supi	Supi	C	0..1	Identifies an UE. Shall be present if the event exposure request applies to more than one UE.	
interGroupId	GroupId	O	0..1	Identifies an UE group.	
appld	ApplicationId	O	0..1	Identifies an application identifier.	
comms	array(CommunicationCollection)	M	1..N	This attribute contains a list of communication information.	

## 5.1.6.2.7 Type NefEventFilter

Table 5.1.6.2.7-1: Definition of type NefEventFilter

Attribute name	Data type	P	Cardinality	Description	Applicability
tgtUe	TargetUeIdentification	M	1	Represents the UE information to which the request applies.	(NOTE 1)
appls	array(ApplicationId)	C	1..N	Each element indicates an application identifier. If absent, the NefEventFilter data applies to any application (i.e. all applications). (NOTE 2)	ServiceExperience Exceptions UeCommunication UeMobility UserDataCongestion PerformanceData Dispersion
locArea	NetworkAreaInfo	O	0..1	Represents an area of interest. (NOTE 3)	ServiceExperience Exceptions UeCommunication UeMobility UserDataCongestion Dispersion CollectiveBehaviour
collAttrs	array(CollectiveBehaviourFilter)	O	1..N	Each element indicates a collective attribute parameter type and value.	CollectiveBehaviour
NOTE 1: Applicability is further described in the corresponding data type.					
NOTE 2: For the events "EXCEPTIONS", "UE_MOBILITY", "UE_COMM", and "PERF_DATA", if present, the "appls" attribute shall include only one element.					
NOTE 3: For event "SVC_EXPERIENCE", only the "tais" attribute within the NetworkAreaInfo data is applicable.					

## 5.1.6.2.8 Type TargetUeIdentification

Table 5.1.6.2.8-1: Definition of type TargetUeIdentification

Attribute name	Data type	P	Cardinality	Description	Applicability
supis	array(Supi)	O	1..N	Each element identifies a SUPI for an UE.	ServiceExperience Exceptions UeMobility UeCommunication UserDataCongestion Dispersion
interGroupIds	array(GroupId)	O	1..N	Each element represents an internal group identifier which identifies a group of UEs.	ServiceExperience Exceptions UeMobility UeCommunication
anyUeId	boolean	O	0..1	Identifies whether the request applies to any UE. This attribute shall set to "true" if applicable for any UE, otherwise, set to "false".	ServiceExperience Exceptions UserDataCongestion
NOTE: For an applicable feature, only one attribute identifying the target UE shall be provided.					

## 5.1.6.2.9 Type: ServiceExperienceInfo

**Table 5.1.6.2.9-1: Definition of type ServiceExperienceInfo**

Attribute name	Data type	P	Cardinality	Description	Applicability
appld	ApplicationId	C	0..1	Identifies an application identifier. Shall be present if the event exposure service request applies to more than one application.	ServiceExperience
supis	array(Supi)	C	1..N	Each element represents the internal UE identifier.	ServiceExperience
svcExpPerFlows	array(ServiceExperienceInfoPerFlow)	M	1..N	Each element indicates service experience for each service flow.	ServiceExperience

## 5.1.6.2.10 Type: UeMobilityInfo

**Table 5.1.6.2.10-1: Definition of type UeMobilityInfo**

Attribute name	Data type	P	Cardinality	Description	Applicability
supi	Supi	M	1	Identifies an UE. Shall be present if the event exposure request applies to more than one UE.	
appld	ApplicationId	O	0..1	Identifies an application identifier.	
ueTrajs	array(UeTrajectoryInfo)	M	1..N	Identifies an UE moving trajectory.	

## 5.1.6.2.11 Type: UeTrajectoryInfo

**Table 5.1.6.2.11-1: Definition of type UeTrajectoryInfo**

Attribute name	Data type	P	Cardinality	Description	Applicability
ts	DateTime	M	1	Identifies the timestamp when the UE enters this area.	
location	UserLocation	M	1	Includes the location of the UE. (NOTE)	

NOTE: Only EutraLocation data and/or NrLocation data in UserLocation data are applicable to the property.

## 5.1.6.2.12 Type PerformanceDataInfo

**Table 5.1.6.2.12-1: Definition of type PerformanceDataInfo**

Attribute name	Data type	P	Cardinality	Description	Applicability
appld	ApplicationId	O	0..1	Indicates an application identifier.	
uelpAddr	IpAddr	O	0..1	Identifies the IP address of a UE.	
ipTrafficFilter	FlowInfo	O	0..1	Identifies IP packet filter.	
userLoc	UserLocation	O	0..1	Represents the user location.	
appLocs	array(Dnai)	O	1..N	Represents the application locations.	
asAddr	AddrFqdn	O	0..1	Represents the IP address or FQDN of the Application Server. (NOTE)	
perfData	PerformanceData	M	1	Indicates the performance data.	
timeStamp	DateTime	M	1	It defines the timestamp of analytics generation.	
NOTE: If the "asAddr" attribute is included, either the "ipAddr" attribute or the "fqdn" attribute in the AddrFqdn data type shall be provided.					

## 5.1.6.3 Simple data types and enumerations

## 5.1.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

## 5.1.6.3.2 Simple data types

The simple data types defined in table 5.1.6.3.2-1 shall be supported.

**Table 5.1.6.3.2-1: Simple data types**

Type Name	Type Definition	Description	Applicability

## 5.1.6.3.3 Enumeration: NefEvent

The enumeration NefEvent represents the observed event requested by the NF service consumer to be monitored. It shall comply with the provisions defined in table 5.1.6.3.3-1.

**Table 5.1.6.3.3-1: Enumeration NefEvent**

Enumeration value	Description	Applicability
SVC_EXPERIENCE	Indicates that the observed event is service experience information.	ServiceExperience
UE_COMM	Indicates that the observed event is UE communication information.	UeCommunication
UE_MOBILITY	Indicates that the observed event is UE mobility information.	UeMobility
EXCEPTIONS	Indicates that the observed event is exceptions information.	Exceptions
USER_DATA_CONGESTION	Indicates that the event subscribed is user data congestion analytics related information.	UserDataCongestion
PERF_DATA	Indicates that the event subscribed is performance data information.	PerformanceData
DISPERSION	Indicates that the event subscribed is dispersion information.	Dispersion
COLLECTIVE_BEHAVIOUR	Indicates that the event subscribed is collective behaviour information.	CollectiveBehaviour

## 5.1.7 Error Handling

### 5.1.7.1 General

For the Nnef\_EventExposure API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Nnef\_EventExposure API.

### 5.1.7.2 Protocol Errors

No specific procedures for the Nnef\_EventExposure service are specified.

### 5.1.7.3 Application Errors

The application errors defined for the Nnef\_EventExposure service are listed in Table 5.1.7.3-1.

**Table 5.1.7.3-1: Application errors**

Application Error	HTTP status code	Description

## 5.1.8 Feature negotiation

The optional features in table 5.1.8-1 are defined for the Nnef\_EventExposure API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

**Table 5.1.8-1: Supported Features**

Feature number	Feature Name	Description
1	ServiceExperience	This feature indicates support for the "SVC_EXPERIENCE" event.
2	UeMobility	This feature indicates support for the "UE_MOBILITY" event.
3	UeCommunication	This feature indicates support for the "UE_COMM" event.
4	Exceptions	This feature indicates support for the "EXCEPTIONS" event.
5	ES3XX	Extended Support for 3xx redirections. This feature indicates the support of redirection for any service operation, according to Stateless NF procedures as specified in subclauses 6.5.3.2 and 6.5.3.3 of 3GPP TS 29.500 [4] and according to HTTP redirection principles for indirect communication, as specified in subclause 6.10.9 of 3GPP TS 29.500 [4].
6	EneNA	This feature indicates support for the enhancements of network data analytics requirements.
7	UserDataCongestion	This feature indicates support for the event related to User Data Congestion Analytics related information.
8	PerformanceData	This feature indicates support for the event related to performance data information.
9	Dispersion	This feature indicates support for the event related to Dispersion Analytics related information.
10	CollectiveBehaviour	This feature indicates support of collective behaviour information associated with the UEs and its applications.

## 5.1.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Nnef\_EventExposure API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Nnef\_EventExposure API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Nnef\_EventExposure service.

The Nnef\_EventExposure API defines a single scope "nnef-eventexposure" for the entire service, and it does not define any additional scopes at resource or operation level.

## 5.2 Nnef\_EASDeployment Service API

### 5.2.1 Introduction

The Nnef\_EASDeployment service shall use the Nnef\_EASDeployment API.

The API URI of the Nnef\_EASDeployment API shall be:

**{apiRoot}/<apiName>/<apiVersion>**

The request URIs used in HTTP requests from the NF service consumer towards the NF service producer shall have the Resource URI structure defined in clause 4.4.1 of 3GPP TS 29.501 [5], i.e.:

**{apiRoot}/<apiName>/<apiVersion>/<apiSpecificResourceUriPart>**

with the following components:

- The {apiRoot} shall be set as described in 3GPP TS 29.501 [5].
- The <apiName> shall be "nnef-eas-deployment".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 5.2.3.

### 5.2.2 Usage of HTTP

#### 5.2.2.1 General

HTTP/2, IETF RFC 7540 [11], shall be used as specified in clause 5 of 3GPP TS 29.500 [4].

HTTP/2 shall be transported as specified in clause 5.3 of 3GPP TS 29.500 [4].

The OpenAPI [6] specification of HTTP messages and content bodies for the Nnef\_EASDeployment API is contained in Annex 3.

#### 5.2.2.2 HTTP standard headers

##### 5.2.2.2.1 General

See clause 5.2.2 of 3GPP TS 29.500 [4] for the usage of HTTP standard headers.

##### 5.2.2.2.2 Content type

JSON, IETF RFC 8259 [12], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.4 of 3GPP TS 29.500 [4]. The use of the JSON format shall be signalled by the content type "application/json".

"Problem Details" JSON object shall be used to indicate additional details of the error in a HTTP response body and shall be signalled by the content type "application/problem+json", as defined in IETF RFC 7807 [13].

### 5.2.2.3 HTTP custom headers

The Nnef\_EASDeployment API shall support mandatory HTTP custom header fields specified in clause 5.2.3.2 of 3GPP TS 29.500 [4] and may support HTTP custom header fields specified in subclause 5.2.3.3 of 3GPP TS 29.500 [4].

In this Release of the specification, no specific custom headers are defined for the Nnef\_EASDeployment API.

## 5.2.3 Resources

### 5.2.3.1 Overview

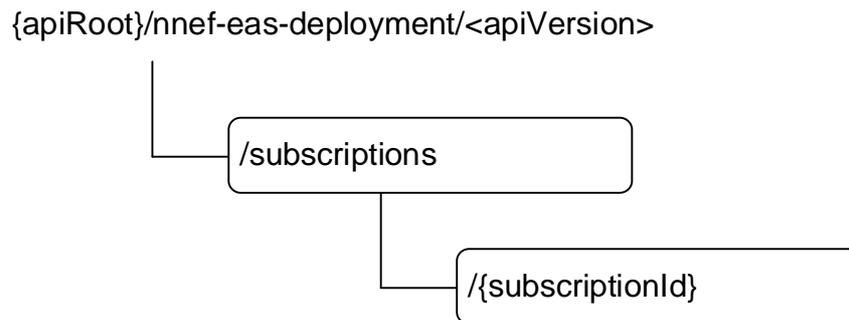


Figure 5.2.3.1-1: Resource URI structure of the Nnef\_EASDeployment API

Table 5.2.3.1-1 provides an overview of the resources and applicable HTTP methods.

Table 5.2.3.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
EAS Deployment Event Subscriptions	/subscriptions	POST	Creates a subscription to notifications of changes of EAS Deployment Information, i.e. creation of an Individual EAS Deployment Event Subscription resource.
Individual EAS Deployment Event Subscription	/subscriptions/{subscriptionId}	GET	Reads an Individual EAS Deployment Event Subscription resource.
		DELETE	Cancels an individual subscription to notifications of subscribed EAS Deployment changes event.

### 5.2.3.2 Resource: EAS Deployment Event Subscriptions

#### 5.2.3.2.1 Description

The resource represents the collection of EAS Deployment changes Event subscriptions of the Nnef\_EASDeployment service. It allows NF service consumers to create a new subscription to notifications on EAS Deployment changes event(s).

#### 5.2.3.2.2 Resource Definition

Resource URI: **{apiRoot}/nnef-eas-deployment/<apiVersion>/subscriptions**

This resource shall support the resource URI variables defined in table 5.2.3.2-1.

**Table 5.2.3.2.2-1: Resource URI variables for this resource**

Name	Data type	Definition
apiRoot	string	See clause 5.2.1
apiVersion	string	See clause 5.2.1

### 5.2.3.2.3 Resource Standard Methods

#### 5.2.3.2.3.1 POST

This method shall support the URI query parameters specified in table 5.2.3.2.3.1-1.

**Table 5.2.3.2.3.1-1: URI query parameters supported by the POST method on this resource**

Name	Data type	P	Cardinality	Description	Applicability
n/a					

This method shall support the request data structures specified in table 5.2.3.2.3.1-2 and the response data structures and response codes specified in table 5.2.3.2.3.1-3.

**Table 5.2.3.2.3.1-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
EasDeploySubData	M	1	Contains the information required for the creation of a new Individual EAS Deployment Event Subscription resource.

**Table 5.2.3.2.3.1-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response Codes	Description
EasDeploySubData	M	1	201 Created	Contains the representation of the Individual EAS Deployment Event Subscription resource.
NOTE: The mandatory HTTP error status code for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 5.2.3.2.3.1-4: Headers supported by the 201 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/nnef-eas-deployment/<apiVersion>/subscriptions/{subscriptionId}

### 5.2.3.3 Resource: Individual EAS Deployment Event Subscription

#### 5.2.3.3.1 Description

The resource represents an individual EAS Deployment Event subscription of the Nnef\_EASDeployment service. It allows NF service consumers to subscribe/unsubscribe an EAS Deployment information change event, and allows the NEF to notify EAS Deployment change event to the subscribed NF service consumer.

#### 5.2.3.3.2 Resource Definition

Resource URI: {apiRoot}/nnef-eas-deployment/<apiVersion>/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.2.3.3.2-1.

Table 5.2.3.3.2-1: Resource URI variables for this resource

Name	Data type	Definition
apiRoot	string	See clause 5.2.1
apiVersion	string	See clause 5.2.1
subscriptionId	string	Identifies a subscription to the NEF event exposure service.

### 5.2.3.3.3 Resource Standard Methods

#### 5.2.3.3.3.1 GET

This method shall support the URI query parameters specified in table 5.2.3.3.3.1-1.

Table 5.2.3.3.3.1-1: URI query parameters supported by the GET method on this resource

Name	Data type	P	Cardinality	Description

This method shall support the request data structures specified in table 5.2.3.3.3.1-2 and the response data structures and response codes specified in table 5.2.3.3.3.1-3.

Table 5.2.3.3.3.1-2: Data structures supported by the GET Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 5.2.3.3.3.1-3: Data structures supported by the GET Response Body on this resource

Data type	P	Cardinality	Response codes	Description
EasDeploySubData	M	1	200 OK	Contains the representation of the Individual EAS Deployment information changes Event Subscription resource.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during subscription retrieval. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF (service) instance.
NOTE: The mandatory HTTP error status codes for the GET method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

Table 5.2.3.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

Table 5.2.3.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

## 5.2.3.3.3.2 PUT

This HTTP method is not supported for the resource.

## 5.2.3.3.3.3 DELETE

This method shall support the URI query parameters specified in table 5.2.3.3.3.3-1.

**Table 5.2.3.3.3.3-1: URI query parameters supported by the DELETE method on this resource**

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 5.2.3.3.3.3-2 and the response data structures and response codes specified in table 5.2.3.3.3.3-3.

**Table 5.2.3.3.3.3-2: Data structures supported by the DELETE Request Body on this resource**

Data type	P	Cardinality	Description
n/a			

**Table 5.2.3.3.3.3-3: Data structures supported by the DELETE Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful case. The Individual EAS Deployment information changes Event Subscription resource matching the subscriptionId was deleted.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF (service) instance.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during subscription termination. The response shall include a Location header field containing an alternative URI of the resource located in an alternative NEF (service) instance.
NOTE: The mandatory HTTP error status code for the DELETE method listed in table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 5.2.3.3.3.3-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

**Table 5.2.3.3.3.3-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI of the resource located in an alternative NEF (service) instance.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the request is redirected.

## 5.2.4 Custom Operations without associated resources

None.

## 5.2.5 Notifications

### 5.2.5.1 General

Notifications shall comply to clause 6.2 of 3GPP TS 29.500 [4] and clause 4.6.2.3 of 3GPP TS 29.501 [5].

**Table 5.2.5.1-1: Notifications overview**

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
Event Notification	{notifUri}	POST	Provides Information about EAS Deployment Information changes event(s).

### 5.2.5.2 EAS Deployment Event Notification

#### 5.2.5.2.1 Description

The EAS Deployment Event Notification is used by the NEF to report the observed EAS Deployment information changes event to a NF service consumer that has subscribed to such Notifications.

#### 5.2.5.2.2 Target URI

The Notification URI "{**notifUri**}" shall be used with the callback URI variables defined in table 5.2.5.2.2-1.

**Table 5.2.5.2.2-1: Callback URI variables for this resource**

Name	Data type	Definition
notifUri	Uri	The Notification Uri as assigned by the NF service consumer during the subscription service operation and described within the EasDeploySubData data type (see table 5.2.6.2.2-1).

#### 5.2.5.2.3 Standard Methods

##### 5.2.5.2.3.1 POST

This method shall support the request data structures specified in table 5.2.5.2.3.1-1 and the response data structures and response codes specified in table 5.2.5.2.3.1-1.

**Table 5.2.5.2.3.1-2: Data structures supported by the POST Request Body on this resource**

Data type	P	Cardinality	Description
EasDeployInfoNotif	M	1	Provides Information about the EAS Deployment Information changes event.

**Table 5.2.5.2.3.1-3: Data structures supported by the POST Response Body on this resource**

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The receipt of the Notification is acknowledged.
RedirectResponse	O	0..1	307 Temporary Redirect	Temporary redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF consumer (service) instance where the notification should be sent.
RedirectResponse	O	0..1	308 Permanent Redirect	Permanent redirection, during event notification. The response shall include a Location header field containing an alternative URI representing the end point of an alternative NF consumer (service) instance where the notification should be sent.
NOTE: The mandatory HTTP error status codes for the POST method listed in Table 5.2.7.1-1 of 3GPP TS 29.500 [4] also apply.				

**Table 5.2.5.2.3.1-4: Headers supported by the 307 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the notification request is redirected.

**Table 5.2.5.2.3.1-5: Headers supported by the 308 Response Code on this resource**

Name	Data type	P	Cardinality	Description
Location	string	M	1	An alternative URI representing the end point of an alternative NF consumer (service) instance towards which the notification should be redirected.
3gpp-Sbi-Target-Nf-Id	string	O	0..1	Identifier of the target NF (service) instance towards which the notification request is redirected.

## 5.2.6 Data Model

### 5.2.6.1 General

This clause specifies the application data model supported by the API.

Table 5.2.6.1-1 specifies the data types defined for the Nnef\_EASDeployment service based interface protocol.

**Table 5.2.6.1-1: Nnef\_EASDeployment specific Data Types**

Data type	Section defined	Description	Applicability
EasDeployInfoNotif	5.2.6.2.3	Represents notifications on EAS Deployment Information changes event(s) that occurred for an Individual EAS Deployment Event Subscription resource.	
EasDeploySubData	5.2.6.2.2	Represents EAS Deployment Information changes event(s) subscription data.	
EasDeployInfoData	5.2.6.2.5	Represents the EAS Deployment Information to be reported.	
EasDepNotification	5.2.6.2.4	Represents the EAS Deployment Notification.	
EasEvent	5.2.6.3.3	represents the EAS event.	

Table 5.2.6.1-2 specifies data types re-used by the Nnef\_EASDeployment service based interface protocol from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the Nnef\_EASDeployment service based interface.

**Table 5.2.6.1-2: Nnef\_EASDeployment re-used Data Types**

Data type	Reference	Comments	Applicability
DnailInformation	3GPP TS 29.522 [15]	Represents the DNAI information including the DNS server identifier (consisting of IP address and port) and/or IP address(s) of the EAS in the local DN for the DNAI.	
DnnSnssailInformation	3GPP TS 29.522 [15]	Identifies a combination of (DNN, S-NSSAI).	
Groupld	3GPP TS 29.571 [16]	Contains a Group identifier.	
Uri	3GPP TS 29.571 [16]	Contains a URI.	

## 5.2.6.2 Structured data types

### 5.2.6.2.1 Introduction

This clause defines the structures to be used in resource representations.

#### 5.2.6.2.2 Type: EasDeploySubData

**Table 5.2.6.2.2-1: Definition of type EasDeploySubData**

Attribute name	Data type	P	Cardinality	Description	Applicability
appld	string	O	0..1	Identifies the application for which the EAS Deployment Information corresponds to.	
dnnSnssailInfos	array(DnnSnssailInformation)	O	1..N	Each of the element identifies a combination of (DNN, S-NSSAI).	
eventld	EasEvent	M	1	Event ID assigned by the NF service consumer.	
eventsNotifs	array(EasDeployInfo)	C	1..N	Represents the EAS Deployment Information changes event(s) to be reported. Shall only be present if the "immRep" attribute is included and sets to true, and the current status of EAS Deployment Information is available.	
immRep	boolean	O	0..1	Indication of immediate reporting: - true: requires the immediate reporting of the current status of EAS Deployment Information, if available. - false (default): EAS Deployment Information event report occurs when the event is met.	
interGroupld	Groupld	O	0..1	Identifies an internal UE group.	
notifld	string	M	1	Notification Correlation ID assigned by the NF service consumer.	
notifUri	Uri	M	1	Notification URI for the EAS Deployment Information event reporting.	

## 5.2.6.2.3 Type: EasDeployInfoNotif

Table 5.2.6.2.3-1: Definition of type EasDeployInfoNotif

Attribute name	Data type	P	Cardinality	Description	Applicability
easDepNotifs	array(EasDepNotification)	M	1..N	Represents the EAS Deployment Notification(s).	
notifId	string	M	1	Notification Correlation ID assigned by the NF service consumer.	

## 5.2.6.2.4 Type: EasDepNotification

Table 5.2.6.2.4-1: Definition of type EasDepNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
easDepInfo	EasDeployInfoData	M	1	Represents the EAS Deployment Information to be reported.	
eventId	EasEvent	M	1	Event ID assigned by the NF service consumer.	

## 5.2.6.2.5 Type: EasDeployInfoData

Table 5.2.6.2.5-1: Definition of type EasDeployInfoData

Attribute name	Data type	P	Cardinality	Description	Applicability
appld	string	O	0..1	Identifies the application for which the EAS Deployment Information corresponds to.	
dnaiInfos	map(DnaiInformation)	O	1..N	list of DNS server identifier (consisting of IP address and port) and/or IP address(s) of the EAS in the local DN for each DNAI. The key of map is the DNAI.	
dnn	Dnn	O	0..1	DNN for the EAS Deployment Information.	
fqdns	array(Fqdn)	M	1..N	Supported FQDN(s) for application(s) deployed in the Local part of the DN.	
interGroupId	GroupId	O	0..1	Internal Group ID for the EAS Deployment Information.	
snssai	Snssai	O	0..1	S-NSSAI for the EAS Deployment Information.	

## 5.2.6.3 Simple data types and enumerations

## 5.2.6.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

## 5.2.6.3.2 Simple data types

The simple data types defined in table 5.2.6.3.2-1 shall be supported.

**Table 5.2.6.3.2-1: Simple data types**

Type Name	Type Definition	Description	Applicability

### 5.2.6.3.3 Enumeration: EasEvent

The enumeration EasEvent represents the EAS event requested by the NF service consumer. It shall comply with the provisions defined in table 5.2.6.3.3-1.

**Table 5.1.6.3.3-1: Enumeration EasEvent**

Enumeration value	Description	Applicability
EAS_INFO_CHG	Indicates that the EAS Deployment Information is changed.	

## 5.2.7 Error Handling

### 5.2.7.1 General

For the Nnef\_EASDeployment API, HTTP error responses shall be supported as specified in clause 4.8 of 3GPP TS 29.501 [5]. Protocol errors and application errors specified in table 5.2.7.2-1 of 3GPP TS 29.500 [4] shall be supported for an HTTP method if the corresponding HTTP status codes are specified as mandatory for that HTTP method in table 5.2.7.1-1 of 3GPP TS 29.500 [4].

In addition, the requirements in the following clauses are applicable for the Nnef\_EASDeployment API.

### 5.2.7.2 Protocol Errors

No specific procedures for the Nnef\_EASDeployment service are specified.

### 5.2.7.3 Application Errors

The application errors defined for the Nnef\_EASDeployment service are listed in Table 5.2.7.3-1.

**Table 5.2.7.3-1: Application errors**

Application Error	HTTP status code	Description

## 5.2.8 Feature negotiation

The optional features in table 5.2.8-1 are defined for the Nnef\_EASDeployment API. They shall be negotiated using the extensibility mechanism defined in clause 6.6 of 3GPP TS 29.500 [4].

**Table 5.2.8-1: Supported Features**

Feature number	Feature Name	Description

## 5.2.9 Security

As indicated in 3GPP TS 33.501 [8] and 3GPP TS 29.500 [4], the access to the Nnef\_EASDeployment API may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [9]), based on local configuration, using the "Client Credentials" authorization grant, where the NRF (see 3GPP TS 29.510 [10]) plays the role of the authorization server.

If OAuth2 is used, an NF Service Consumer, prior to consuming services offered by the Nnef\_EASDeployment API, shall obtain a "token" from the authorization server, by invoking the Access Token Request service, as described in 3GPP TS 29.510 [10], clause 5.4.2.2.

NOTE: When multiple NRFs are deployed in a network, the NRF used as authorization server is the same NRF that the NF Service Consumer used for discovering the Nnef\_EventExposure service.

The Nnef\_EASDeployment API defines a single scope "nnef-eas-deployment" for the entire service, and it does not define any additional scopes at resource or operation level.

# Annex A (normative): OpenAPI specification

## A.1 General

This Annex specifies the formal definition of the API(s) defined in the present specification. It consists of OpenAPI 3.0.0 specifications in YAML format.

This Annex takes precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

**NOTE:** The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository that uses the GitLab software version control system (see clause 5B of the 3GPP TR 21.900 [7] and clause 5.3.1 of the 3GPP TS 29.501 [5] for further information).

## A.2 Nnef\_EventExposure API

```

openapi: 3.0.0
info:
  title: Nnef_EventExposure
  version: 1.1.0-alpha.5
  description: |
    NEF Event Exposure Service.
    © 2022 , 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.
externalDocs:
  description: >
    3GPP TS 29.591 V17.5.0; 5G System; Network Exposure Function Southbound Services; Stage 3.
  url: https://www.3gpp.org/ftp/Specs/archive/29_series/29.591/
servers:
- url: '{apiRoot}/nnef-eventexposure/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501
security:
- {}
- oAuth2ClientCredentials:
  - nnef-eventexposure
paths:
  /subscriptions:
    post:
      summary: subscribe to notifications
      operationId: CreateIndividualSubscription
      tags:
      - Subscriptions (Collection)
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/NefEventExposureSubsc'
      responses:
        '201':
          description: Success
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/NefEventExposureSubsc'
      headers:
        Location:
          description: >

```

```

    Contains the URI of the newly created resource, according to the structure
    {apiRoot}/nnef-eventexposure/<apiVersion>/subscriptions/{subscriptionId}
    required: true
    schema:
      type: string
'400':
  $ref: 'TS29571_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29571_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29571_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29571_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29571_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29571_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29571_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29571_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29571_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29571_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29571_CommonData.yaml#/components/responses/default'
callbacks:
  myNotification:
    '{$request.body#/notifUri}':
      post:
        requestBody:
          required: true
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/NefEventExposureNotif'
  responses:
    '204':
      description: No Content, Notification was succesfull
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/subscriptions/{subscriptionId}:
  get:
    summary: retrieve subscription
    operationId: GetIndividualSubscription
    tags:
      - IndividualSubscription (Document)
    parameters:
      - name: subscriptionId
        in: path
        description: Event Subscription ID
        required: true
        schema:

```

```

    type: string
  - name: supp-feat
    in: query
    description: Features supported by the NF service consumer
    required: false
    schema:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'
responses:
  '200':
    description: OK. Resource representation is returned
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NefEventExposureSubsc'
  '307':
    $ref: 'TS29571_CommonData.yaml#/components/responses/307'
  '308':
    $ref: 'TS29571_CommonData.yaml#/components/responses/308'
  '400':
    $ref: 'TS29571_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29571_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29571_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29571_CommonData.yaml#/components/responses/404'
  '406':
    $ref: 'TS29571_CommonData.yaml#/components/responses/406'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
put:
  summary: update subscription
  operationId: ReplaceIndividualSubscription
  tags:
    - IndividualSubscription (Document)
  requestBody:
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/NefEventExposureSubsc'
  parameters:
    - name: subscriptionId
      in: path
      description: Event Subscription ID
      required: true
      schema:
        type: string
  responses:
    '200':
      description: OK. Resource was succesfully modified and representation is returned
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/NefEventExposureSubsc'
    '204':
      description: No Content. Resource was succesfully modified
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':

```

```

    $ref: 'TS29571_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29571_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29571_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29571_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
delete:
  summary: unsubscribe from notifications
  operationId: DeleteIndividualSubscription
  tags:
    - IndividualSubscription (Document)
  parameters:
    - name: subscriptionId
      in: path
      description: Event Subscription ID
      required: true
      schema:
        type: string
  responses:
    '204':
      description: No Content. Resource was successfully deleted
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29571_CommonData.yaml#/components/responses/default'
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            nnef-eventexposure: Access to the Nnef_EventExposure API
schemas:
  NefEventExposureSubsc:
    description: Represents an Individual Network Exposure Event Subscription resource.
    type: object
    properties:
      eventsSubs:
        type: array
        items:
          $ref: '#/components/schemas/NefEventSubs'
        minItems: 1
      eventsRepInfo:
        $ref: 'TS29523_Npcf_EventExposure.yaml#/components/schemas/ReportingInformation'
      notifUri:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
      notifId:
        type: string
      eventNotifs:
        type: array
        items:
          $ref: '#/components/schemas/NefEventNotification'
        minItems: 1
      suppFeat:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'

```

```

    required:
      - eventsSubs
      - notifId
      - notifUri
  NefEventExposureNotif:
    description: >
      Represents notifications on network exposure event(s) that occurred for an Individual
Network
  Exposure Event Subscription resource.
  type: object
  properties:
    notifId:
      type: string
    eventNotifs:
      type: array
      items:
        $ref: '#/components/schemas/NefEventNotification'
      minItems: 1
  required:
    - notifId
    - eventNotifs
  NefEventNotification:
    description: Represents information related to an event to be reported.
    type: object
    properties:
      event:
        $ref: '#/components/schemas/NefEvent'
      timeStamp:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
      svcExprcInfos:
        type: array
        items:
          $ref: '#/components/schemas/ServiceExperienceInfo'
        minItems: 1
      ueMobilityInfos:
        type: array
        items:
          $ref: '#/components/schemas/UeMobilityInfo'
        minItems: 1
      ueCommInfos:
        type: array
        items:
          $ref: '#/components/schemas/UeCommunicationInfo'
        minItems: 1
      excepInfos:
        type: array
        items:
          $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/ExceptionInfo'
        minItems: 1
      congestionInfos:
        type: array
        items:
          $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/UserDataCongestionCollection'
        minItems: 1
      perfDataInfos:
        type: array
        items:
          $ref: '#/components/schemas/PerformanceDataInfo'
        minItems: 1
      dispersionInfos:
        type: array
        items:
          $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/DispersionCollection'
        minItems: 1
      collBhvrInfs:
        type: array
        items:
          $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/CollectiveBehaviourInfo'
        minItems: 1
  required:
    - event
    - timeStamp
  NefEventSubs:
    description: Represents an event to be subscribed and the related event filter information.
    type: object
    properties:
      event:
        $ref: '#/components/schemas/NefEvent'

```

```

    eventFilter:
      $ref: '#/components/schemas/NefEventFilter'
    required:
      - event
  NefEventFilter:
    description: Represents event filter information for an event.
    type: object
    properties:
      tgtUe:
        $ref: '#/components/schemas/TargetUeIdentification'
      appIds:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationId'
        minItems: 1
      locArea:
        $ref: 'TS29554_Npcf_BDTPolicyControl.yaml#/components/schemas/NetworkAreaInfo'
      collAttrs:
        type: array
        items:
          $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/CollectiveBehaviourFilter'
        minItems: 1
    required:
      - tgtUe
  TargetUeIdentification:
    description: Identifies the UE to which the request applies.
    type: object
    properties:
      supis:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
        minItems: 1
      interGroupIds:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/GroupId'
        minItems: 1
      anyUeId:
        type: boolean
  ServiceExperienceInfo:
    description: Contains service experience information associated with an application.
    type: object
    properties:
      appId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationId'
      supis:
        type: array
        items:
          $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
        minItems: 1
      svcExpPerFlows:
        type: array
        items:
          $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/ServiceExperienceInfoPerFlow'
        minItems: 1
    required:
      - svcExpPerFlows
  UeMobilityInfo:
    description: Contains UE mobility information associated with an application.
    type: object
    properties:
      supi:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
      appId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationId'
      ueTrajs:
        type: array
        items:
          $ref: '#/components/schemas/UeTrajectoryInfo'
        minItems: 1
    required:
      - supi
      - ueTrajs
  UeCommunicationInfo:
    description: Contains UE communication information associated with an application.
    type: object
    properties:

```

```

supi:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/Supi'
interGroupId:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/GroupId'
appId:
  $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationId'
comms:
  type: array
  items:
    $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/CommunicationCollection'
  minItems: 1
required:
- comms
UeTrajectoryInfo:
description: Contains UE trajectory information.
type: object
properties:
  ts:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
  location:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
required:
- ts
- location
PerformanceDataInfo:
description: Contains Performance Data Analytics related information collection.
type: object
properties:
  appId:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/ApplicationId'
  ueIpAddr:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/IpAddr'
  ipTrafficFilter:
    $ref: 'TS29122_CommonData.yaml#/components/schemas/FlowInfo'
  userLoc:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/UserLocation'
  appLocs:
    type: array
    items:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnai'
    minItems: 1
  asAddr:
    $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/AddrFqdn'
  perfData:
    $ref: 'TS29517_Naf_EventExposure.yaml#/components/schemas/PerformanceData'
  timeStamp:
    $ref: 'TS29571_CommonData.yaml#/components/schemas/DateTime'
required:
- perfData
- timeStamp
# Simple data types and Enumerations

NefEvent:
description: Represents Network Exposure Events.
anyOf:
- type: string
  enum:
    - SVC_EXPERIENCE
    - UE_MOBILITY
    - UE_COMM
    - EXCEPTIONS
    - USER_DATA_CONGESTION
    - PERF_DATA
    - DISPERSION
    - COLLECTIVE_BEHAVIOUR
- type: string

```

---

## A.3 Nnef\_EASDeployment API

```

openapi: 3.0.0
info:
  title: Nnef_EASDeployment
  version: 1.0.0-alpha.1
  description: |
    NEF EAS Deployment service.

```

© 2022, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).  
All rights reserved.

```

externalDocs:
  description: >
    3GPP TS 29.591 V17.5.0; 5G System; Network Exposure Function Southbound Services; Stage 3.
  url: https://www.3gpp.org/ftp/Specs/archive/29_series/29.591/
servers:
  - url: '{apiRoot}/nnef-eas-deployment/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 4.4 of 3GPP TS 29.501
security:
  - {}
  - oAuth2ClientCredentials:
    - nnef-eas-deployment
paths:
  /subscriptions:
    post:
      summary: subscribe to notifications
      operationId: CreateIndividualSubscription
      tags:
        - Subscriptions (Collection)
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/EasDeploySubData'
      responses:
        '201':
          description: Success
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/EasDeploySubData'
          headers:
            Location:
              description: >
                Contains the URI of the newly created resource, according to the structure:
                {apiRoot}/nnef-eas-deployment/<apiVersion>/subscriptions/{subscriptionId}.
              required: true
              schema:
                type: string
        '400':
          $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29571_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29571_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29571_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29571_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29571_CommonData.yaml#/components/responses/default'
    callbacks:
      notifUri:
        '{$request.body#/notifUri}':
          post:
            requestBody:
              required: true
              content:
                application/json:
                  schema:
                    $ref: '#/components/schemas/EasDeployInfoNotif'
            responses:
              '204':

```

```

        description: No Content, Notification was succesfull
    '307':
        $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
        $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
        $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
        $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
        $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
        $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '411':
        $ref: 'TS29571_CommonData.yaml#/components/responses/411'
    '413':
        $ref: 'TS29571_CommonData.yaml#/components/responses/413'
    '415':
        $ref: 'TS29571_CommonData.yaml#/components/responses/415'
    '429':
        $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
        $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
        $ref: 'TS29571_CommonData.yaml#/components/responses/503'
    default:
        $ref: 'TS29571_CommonData.yaml#/components/responses/default'
/subscriptions/{subscriptionId}:
get:
    summary: retrieve subscription
    operationId: GetIndividualSubscription
    tags:
        - IndividualSubscription (Document)
    parameters:
        - name: subscriptionId
          in: path
          description: Event Subscription ID
          required: true
          schema:
              type: string
    responses:
        '200':
            description: OK. Resource representation is returned
            content:
                application/json:
                    schema:
                        $ref: '#/components/schemas/EasDeploySubData'
        '307':
            $ref: 'TS29571_CommonData.yaml#/components/responses/307'
        '308':
            $ref: 'TS29571_CommonData.yaml#/components/responses/308'
        '400':
            $ref: 'TS29571_CommonData.yaml#/components/responses/400'
        '401':
            $ref: 'TS29571_CommonData.yaml#/components/responses/401'
        '403':
            $ref: 'TS29571_CommonData.yaml#/components/responses/403'
        '404':
            $ref: 'TS29571_CommonData.yaml#/components/responses/404'
        '406':
            $ref: 'TS29571_CommonData.yaml#/components/responses/406'
        '429':
            $ref: 'TS29571_CommonData.yaml#/components/responses/429'
        '500':
            $ref: 'TS29571_CommonData.yaml#/components/responses/500'
        '503':
            $ref: 'TS29571_CommonData.yaml#/components/responses/503'
        default:
            $ref: 'TS29571_CommonData.yaml#/components/responses/default'
delete:
    summary: unsubscribe from notifications
    operationId: DeleteIndividualSubscription
    tags:
        - IndividualSubscription (Document)
    parameters:
        - name: subscriptionId
          in: path
          description: Event Subscription ID

```

```

    required: true
    schema:
      type: string
  responses:
    '204':
      description: No Content. Resource was successfully deleted
    '307':
      $ref: 'TS29571_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29571_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29571_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29571_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29571_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29571_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29571_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29571_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29571_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29571_CommonData.yaml#/components/responses/default'
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{nrfApiRoot}/oauth2/token'
          scopes:
            nef-eas-deployment: Access to the Nnef_EASDeployment API
schemas:
  EasDeploySubData:
    description: Represents an Individual EAS Deployment Event Subscription resource.
    type: object
    properties:
      appId:
        type: string
      dnnSnssaiInfos:
        type: array
        items:
          $ref: 'TS29522_AMInfluence.yaml#/components/schemas/DnnSnssaiInformation'
        minItems: 1
        description: Each of the element identifies a (DNN, S-NSSAI) combination.
      eventId:
        $ref: '#/components/schemas/EasEvent'
      eventsNotifs:
        type: array
        items:
          $ref: 'TS29522_EASDeployment.yaml#/components/schemas/EasDeployInfo'
        minItems: 1
      description: >
        Represents the EAS Deployment Information changes event(s) to be reported.
        Shall only be present if the "immRep" attribute is included and sets to true,
        and the current status of EAS Deployment Information is available.
      immRep:
        type: boolean
        description: >
        Indication of immediate reporting. Set to true: requires the immediate reporting of the
        current status of EAS Deployment Information, if available. Set to false (default): EAS
        Deployment Information event report occurs when the event is met.
      interGroupId:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/GroupId'
      notifId:
        type: string
      notifUri:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Uri'
    required:
      - eventId
      - notifId
      - notifUri
  EasDeployInfoNotif:
    description: >
    Represents notifications on EAS Deployment Information changes event(s) that occurred for an

```

```

    Individual EAS Deployment Event Subscription resource.
  type: object
  properties:
    easDepNotifs:
      type: array
      items:
        $ref: '#/components/schemas/EasDepNotification'
      minItems: 1
    notifId:
      type: string
  required:
    - easDepNotifs
    - notifId
EasDepNotification:
  description: Represents the EAS Deployment Notification.
  type: object
  properties:
    easDepInfo:
      $ref: '#/components/schemas/EasDeployInfoData'
    eventId:
      $ref: '#/components/schemas/EasEvent'
  required:
    - easDepInfo
    - eventId
EasDeployInfoData:
  description: Represents the EAS Deployment Information to be reported.
  type: object
  properties:
    appId:
      type: string
    dnaiInfos:
      type: object
      additionalProperties:
        $ref: 'TS29522_EASDeployment.yaml#/components/schemas/DnaiInformation'
      minProperties: 1
    description: >
      list of DNS server identifier (consisting of IP address and port) and/or IP address(s)
      of the EAS in the local DN for each DNAI. The key of map is the DNAI.
    dnn:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Dnn'
    fqdns:
      type: array
      items:
        $ref: 'TS29571_CommonData.yaml#/components/schemas/Fqdn'
      minItems: 1
    internalGroupId:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/GroupId'
    snssai:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/Snssai'
  required:
    - fqdns
# Simple data types and Enumerations

EasEvent:
  anyOf:
    - type: string
      enum:
        - EAS_INFO_CHG
    - type: string
  description: >
  Possible values are
  - EAS_INFO_CHG: Indicates that the EAS Deployment Information is changed.

```

## Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2019-10	CT3#106					TS Skeleton	0.0.0
2019-10	CT3#106	C3-194392				Removed some subclauses and editorial changes	0.1.0
2019-10	CT3#106					Inclusion of C3-194271, C3-194396, C3-194397 and C3-194399.	0.2.0
2019-11	CT3#107					Inclusion of C3-195234, C3-195235, C3-195236 and C3-195274.	0.3.0
2020-02	CT3#108e					Inclusion of C3-201284, C3-201288, C3-201367, C3-201368, C3-201370, C3-201407, C3-201409, C3-201413 and C3-201516.	0.4.0
2020-03	CT#87e	CP-200187				TS sent to plenary for approval	1.0.0
2020-03	CT#87e	CP-200187				TS approved by plenary	16.0.0
2020-06	CT#88e	CP-201234	0001	1	F	Correction on resource usage	16.1.0
2020-06	CT#88e	CP-201234	0002		F	Data type used during event subscription	16.1.0
2020-06	CT#88e	CP-201234	0007	1	F	Correction to service operation description	16.1.0
2020-06	CT#88e	CP-201244	0008	1	F	Storage of YAML files in ETSI Forge	16.1.0
2020-06	CT#88e	CP-201210	0009	1	F	Removal of Nnef_EventExposure service	16.1.0
2020-06	CT#88e	CP-201256	0011	1	F	URI of the Nnef_EventExposure service	16.1.0
2020-06	CT#88e	CP-201234	0012		F	Event Reporting Information data usage	16.1.0
2020-06	CT#88e	CP-201234	0013		F	Support of immediate reporting	16.1.0
2020-06	CT#88e	CP-201234	0014		F	Supported features definition	16.1.0
2020-06	CT#88e	CP-201234	0015		F	Correction on the ueCommInfos	16.1.0
2020-06	CT#88e	CP-201234	0016		F	Applicabilities for UE communication	16.1.0
2020-06	CT#88e	CP-201234	0017	1	F	Supported headers, Resource Data type and yaml mapping	16.1.0
2020-06	CT#88e	CP-201255	0018		F	Update of OpenAPI version and TS version in externalDocs field	16.1.0
2020-09	CT#89e	CP-202066	0019	1	F	Default value for eventsReplInfo attribute	16.2.0
2020-09	CT#89e	CP-202066	0022		F	Missed response code	16.2.0
2020-09	CT#89e	CP-202066	0023		F	Applicabilities of appls and locArea	16.2.0
2020-09	CT#89e	CP-202084	0024		F	Update of OpenAPI version and TS version in externalDocs field	16.2.0
2020-12	CT#90e	CP-203139	0025	1	F	Essential Corrections and alignments	16.3.0
2020-12	CT#90e	CP-203139	0026		F	Storage of YAML files in 3GPP Forge	16.3.0
2020-12	CT#90e	CP-203139	0028	1	F	Callback URI correction	16.3.0
2020-12	CT#90e	CP-203152	0030		F	Update of OpenAPI version and TS version in externalDocs field	16.3.0
2020-12	CT#90e	CP-203130	0029	1	F	Corrections to location area usage	17.0.0
2021-03	CT#91e	CP-210191	0032		F	Support Stateless NFs	17.1.0
2021-03	CT#91e	CP-210218	0033		F	OpenAPI reference	17.1.0
2021-03	CT#91e	CP-210230	0034	2	F	Correction to location information usage	17.1.0
2021-03	CT#91e	CP-210221	0035	1	F	Adding some missing description fields to data type definitions in OpenAPI	17.1.0
2021-03	CT#91e	CP-210230	0036	1	F	Adding description fields to the data types in the Nnef_EventExposure specific and reused Data Types tables	17.1.0
2021-03	CT#91e	CP-210230	0037	1	F	Specifying the Applicability field for some data types in the Nnef_EventExposure Data Types tables	17.1.0
2021-03	CT#91e	CP-210220	0038		F	Optional header clarification	17.1.0
2021-03	CT#91e	CP-210206	0040		A	Resource URI correction	17.1.0
2021-03	CT#91e	CP-210240	0042		F	Update of OpenAPI version and TS version in externalDocs field	17.1.0
2021-06	CT#92e	CP-211221	0043		B	Support of Mute reporting	17.2.0
2021-06	CT#92e	CP-211221	0044		B	Partitioning criteria for applying sampling in specific UE partitions in NEF event exposure	17.2.0
2021-06	CT#92e	CP-211220	0046	1	A	Presence condition of eventsReplInfo attribute	17.2.0
2021-06	CT#92e	CP-211200	0048	1	A	Redirection responses	17.2.0
2021-06	CT#92e	CP-211173	0049	2	B	Extensions to User Data Congestion Analytics	17.2.0
2021-06	CT#92e	CP-211265	0051		F	Update of OpenAPI version and TS version in externalDocs field	17.2.0
2021-09	CT#93e	CP-212220	0052		F	Resource URI correction on Nnef_EventExposure API	17.3.0
2021-09	CT#93e	CP-212245	0053	1	B	Implementation for Performance Data event	17.3.0
2021-09	CT#93e	CP-212203	0054		B	Support UE data volume dispersion collection	17.3.0
2021-09	CT#93e	CP-214553	0055		F	Update of OpenAPI version and TS version in externalDocs field	17.3.0
2021-12	CT#94e	CP-213227	0057	1	F	Updates to User Data Congestion	17.4.0
2021-12	CT#94e	CP-213227	0058	1	F	Updates to UE data volume dispersion collection	17.4.0
2021-12	CT#94e	CP-213227	0059	2	F	Update of notification procedure with description of USER_DATA_CONGESTION and DISPERSION events	17.4.0
2021-12	CT#94e	CP-213233	0060		B	Clarification on Nnef_Authentication service	17.4.0
2021-12	CT#94e	CP-213223	0063		B	Procedures to support Nnef_EASDeployment_Subscribe service operation	17.4.0

2021-12	CT#94e	CP-213228	0061		B	Collective Behaviour Analytics	17.4.0
2021-12	CT#94e	<a href="#">CP-213246</a>	0062		F	Update of OpenAPI version and TS version in externalDocs field	17.4.0
2022-03	CT#95e	CP-220185	0064	3	B	Procedures to support Nnef_EASDeployment_Unsubscribe service operation	17.5.0
2022-03	CT#95e	CP-220185	0065	4	B	Procedures to support Nnef_EASDeployment_Notify service operation	17.5.0
2022-03	CT#95e	CP-220186	0067		B	Service Architecture for Nnef_EASDeployment service	17.5.0
2022-03	CT#95e	CP-220186	0068	1	B	Update procedures to support Nnef_EASDeployment_Subscribe service operation	17.5.0
2022-03	CT#95e	CP-220186	0069	1	B	API definition to support Nnef_EASDeployment service	17.5.0
2022-03	CT#95e	CP-220361	0070	2	B	OpenAPI to support Nnef_EASDeployment service	17.5.0
2022-03	CT#95e	CP-220190	0071	1	F	Corrections to Data Model of NEF Event Exposure service	17.5.0
2022-03	CT#95e	CP-220201	0072		F	Corrections to Nnef_EventExposure_Subscribe Service Operation	17.5.0
2022-03	CT#95e	CP-220185	0073	1	F	Formatting of description fields	17.5.0
2022-03	CT#95e	CP-220194	0074		F	Update of info and externalDocs field	17.5.0

---

# History

<b>Document history</b>		
V17.5.0	May 2022	Publication