



Network Functions Virtualisation (NFV) Release 5; Protocols and Data Models; RESTful protocols specification for the management of NFV-MANO

Disclaimer

The present document has been produced and approved by the Network Functions Virtualisation (NFV) ETSI Industry Specification Group (ISG) and represents the views of those members who participated in this ISG.
It does not necessarily represent the views of the entire ETSI membership.

Reference

RGS/NFV-SOL009ed511

Keywords

API, management, MANO, NFV, stage 3

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<https://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.
All rights reserved.

Contents

| | |
|---|----|
| Intellectual Property Rights | 12 |
| Foreword..... | 12 |
| Modal verbs terminology..... | 12 |
| 1 Scope | 13 |
| 2 References | 13 |
| 2.1 Normative references | 13 |
| 2.2 Informative references..... | 14 |
| 3 Definition of terms, symbols and abbreviations..... | 15 |
| 3.1 Terms..... | 15 |
| 3.2 Symbols..... | 15 |
| 3.3 Abbreviations | 16 |
| 4 General aspects..... | 16 |
| 4.1 Overview | 16 |
| 4.2 NFV-MANO management concepts | 17 |
| 4.2.1 Introduction..... | 17 |
| 4.2.2 NFV-MANO functional entity composition | 17 |
| 4.2.2.1 NFV-MANO functional entity | 17 |
| 4.2.2.2 NFV-MANO service..... | 18 |
| 4.2.2.3 NFV-MANO service interface | 19 |
| 4.2.2.4 NFV-MANO functional entity application and NFV-MANO functional entity components | 19 |
| 4.2.3 Peer functional entity and consumed NFV-MANO interfaces | 19 |
| 4.2.4 Consumption of NFV-MANO management APIs | 21 |
| 4.3 Common data types | 21 |
| 4.3.1 General..... | 21 |
| 4.3.2 Structured data types..... | 21 |
| 4.3.2.1 Introduction..... | 21 |
| 4.3.2.2 Type: ManoEntitySubscriptionFilter..... | 21 |
| 4.3.2.3 Type: ManoManagedObjectReference..... | 22 |
| 4.3.3 Simple data types and enumerations | 23 |
| 4.3.3.1 Introduction..... | 23 |
| 4.3.3.2 Simple data types | 23 |
| 4.3.3.3 Enumerations | 23 |
| 4.4 HTTP conditional requests | 23 |
| 5 NFV-MANO Configuration and Information Management interface | 24 |
| 5.1 Description | 24 |
| 5.2 API version..... | 25 |
| 5.3 Resource structure and method | 25 |
| 5.4 Sequence diagrams | 27 |
| 5.4.1 Flow of the Read Config Info operation | 27 |
| 5.4.2 Flow of the Modify Config operation | 27 |
| 5.4.3 Flow of subscriptions management | 28 |
| 5.4.4 Flow of sending notifications..... | 30 |
| 5.4.5 Flow of changing the state of a managed entity..... | 30 |
| 5.4.6 Flow of managing information and configuration with regards to peer functional entity | 32 |
| 5.5 Resources | 35 |
| 5.5.1 Introduction..... | 35 |
| 5.5.2 Resource: API versions..... | 35 |
| 5.5.3 Resource: NFV-MANO entity | 35 |
| 5.5.3.1 Description | 35 |
| 5.5.3.2 Resource definition | 35 |
| 5.5.3.3 Resource methods | 36 |
| 5.5.3.3.1 POST | 36 |
| 5.5.3.3.2 GET | 36 |
| 5.5.3.3.3 PUT | 36 |

| | | |
|------------|---|----|
| 5.5.3.3.4 | PATCH..... | 36 |
| 5.5.3.3.5 | DELETE..... | 37 |
| 5.5.4 | Resource: Subscriptions..... | 37 |
| 5.5.4.1 | Description..... | 37 |
| 5.5.4.2 | Resource definition..... | 38 |
| 5.5.4.3 | Resource methods..... | 38 |
| 5.5.4.3.1 | POST..... | 38 |
| 5.5.4.3.2 | GET..... | 39 |
| 5.5.4.3.3 | PUT..... | 41 |
| 5.5.4.3.4 | PATCH..... | 41 |
| 5.5.4.3.5 | DELETE..... | 41 |
| 5.5.5 | Resource: Individual subscription..... | 41 |
| 5.5.5.1 | Description..... | 41 |
| 5.5.5.2 | Resource definition..... | 41 |
| 5.5.5.3 | Resource methods..... | 41 |
| 5.5.5.3.1 | POST..... | 41 |
| 5.5.5.3.2 | GET..... | 41 |
| 5.5.5.3.3 | PUT..... | 42 |
| 5.5.5.3.4 | PATCH..... | 42 |
| 5.5.5.3.5 | DELETE..... | 42 |
| 5.5.6 | Resource: Notification endpoint..... | 43 |
| 5.5.6.1 | Description..... | 43 |
| 5.5.6.2 | Resource definition..... | 43 |
| 5.5.6.3 | Resource methods..... | 43 |
| 5.5.6.3.1 | POST..... | 43 |
| 5.5.6.3.2 | GET..... | 43 |
| 5.5.6.3.3 | PUT..... | 44 |
| 5.5.6.3.4 | PATCH..... | 44 |
| 5.5.6.3.5 | DELETE..... | 44 |
| 5.5.7 | Resource: Change NFV-MANO entity state task..... | 44 |
| 5.5.7.1 | Description..... | 44 |
| 5.5.7.2 | Resource definition..... | 44 |
| 5.5.7.3 | Resource methods..... | 45 |
| 5.5.7.3.1 | POST..... | 45 |
| 5.5.7.3.2 | GET..... | 45 |
| 5.5.7.3.3 | PUT..... | 45 |
| 5.5.7.3.4 | PATCH..... | 46 |
| 5.5.7.3.5 | DELETE..... | 46 |
| 5.5.8 | Resource: Change state operation occurrences..... | 46 |
| 5.5.8.1 | Description..... | 46 |
| 5.5.8.2 | Resource definition..... | 46 |
| 5.5.8.3 | Resource methods..... | 46 |
| 5.5.8.3.1 | POST..... | 46 |
| 5.5.8.3.2 | GET..... | 46 |
| 5.5.8.3.3 | PUT..... | 48 |
| 5.5.8.3.4 | PATCH..... | 48 |
| 5.5.8.3.5 | DELETE..... | 49 |
| 5.5.9 | Resource: Individual change state operation occurrence..... | 49 |
| 5.5.9.1 | Description..... | 49 |
| 5.5.9.2 | Resource definition..... | 49 |
| 5.5.9.3 | Resource methods..... | 49 |
| 5.5.9.3.1 | POST..... | 49 |
| 5.5.9.3.2 | GET..... | 49 |
| 5.5.9.3.3 | PUT..... | 50 |
| 5.5.9.3.4 | PATCH..... | 50 |
| 5.5.9.3.5 | DELETE..... | 50 |
| 5.5.10 | Resource: NFV-MANO service interfaces..... | 50 |
| 5.5.10.1 | Description..... | 50 |
| 5.5.10.2 | Resource definition..... | 50 |
| 5.5.10.3 | Resource methods..... | 51 |
| 5.5.10.3.1 | POST..... | 51 |
| 5.5.10.3.2 | GET..... | 51 |

| | | |
|------------|---|----|
| 5.5.10.3.3 | PUT | 52 |
| 5.5.10.3.4 | PATCH..... | 52 |
| 5.5.10.3.5 | DELETE..... | 53 |
| 5.5.11 | Resource: Individual NFV-MANO service interface | 53 |
| 5.5.11.1 | Description | 53 |
| 5.5.11.2 | Resource definition | 53 |
| 5.5.11.3 | Resource methods | 53 |
| 5.5.11.3.1 | POST | 53 |
| 5.5.11.3.2 | GET | 53 |
| 5.5.11.3.3 | PUT | 54 |
| 5.5.11.3.4 | PATCH..... | 54 |
| 5.5.11.3.5 | DELETE..... | 55 |
| 5.5.12 | Resource: Change interface state task..... | 55 |
| 5.5.12.1 | Description | 55 |
| 5.5.12.2 | Resource definition | 56 |
| 5.5.12.3 | Resource methods | 56 |
| 5.5.12.3.1 | POST | 56 |
| 5.5.12.3.2 | GET | 57 |
| 5.5.12.3.3 | PUT | 57 |
| 5.5.12.3.4 | PATCH..... | 57 |
| 5.5.12.3.5 | DELETE..... | 57 |
| 5.5.13 | Resource: Peer entities..... | 57 |
| 5.5.13.1 | Description | 57 |
| 5.5.13.2 | Resource definition | 58 |
| 5.5.13.3 | Resource methods | 58 |
| 5.5.13.3.1 | POST | 58 |
| 5.5.13.3.2 | GET | 59 |
| 5.5.13.3.3 | PUT | 60 |
| 5.5.13.3.4 | PATCH..... | 60 |
| 5.5.13.3.5 | DELETE..... | 61 |
| 5.5.14 | Resource: Individual peer entity | 61 |
| 5.5.14.1 | Description | 61 |
| 5.5.14.2 | Resource definition | 61 |
| 5.5.14.3 | Resource methods | 61 |
| 5.5.14.3.1 | POST | 61 |
| 5.5.14.3.2 | GET | 61 |
| 5.5.14.3.3 | PUT | 62 |
| 5.5.14.3.4 | PATCH..... | 62 |
| 5.5.14.3.5 | DELETE..... | 63 |
| 5.6 | Data model | 64 |
| 5.6.1 | Introduction..... | 64 |
| 5.6.2 | Resource and notification data types | 64 |
| 5.6.2.1 | Introduction | 64 |
| 5.6.2.2 | Type: ManoEntity | 64 |
| 5.6.2.3 | Type: ManoConfigModificationRequest | 66 |
| 5.6.2.4 | Type: ManoConfigModifications..... | 67 |
| 5.6.2.5 | Type: CimSubscriptionRequest..... | 68 |
| 5.6.2.6 | Type: CimSubscription | 68 |
| 5.6.2.7 | Type: InformationChangedNotification | 68 |
| 5.6.2.8 | Type: ChangeStateRequest | 69 |
| 5.6.2.9 | Type: ChangeStateOpOcc | 70 |
| 5.6.2.10 | Type: ChangeStateNotification | 70 |
| 5.6.2.11 | Type: ManoServiceInterface | 71 |
| 5.6.2.12 | Type: ManoServiceInterfaceModificationRequest | 73 |
| 5.6.2.13 | Type: ManoServiceInterfaceModifications..... | 74 |
| 5.6.2.14 | Type: CreatePeerEntityRequest | 74 |
| 5.6.2.15 | Type: PeerEntity | 75 |
| 5.6.2.16 | Type: PeerEntityConfigModificationRequest | 76 |
| 5.6.2.17 | Type: PeerEntityConfigModifications | 77 |
| 5.6.3 | Referenced structured data types | 78 |
| 5.6.3.1 | Introduction..... | 78 |
| 5.6.3.2 | Type: ManoEntityComponent..... | 78 |

| | | |
|----------|---|-----|
| 5.6.3.3 | Type: ManoService | 78 |
| 5.6.3.4 | Type: NfvoSpecificInfo | 79 |
| 5.6.3.5 | Type: VnfmSpecificInfo | 80 |
| 5.6.3.6 | Type: VimSpecificInfo..... | 81 |
| 5.6.3.7 | Type: ManoEntityConfigurableParams..... | 82 |
| 5.6.3.8 | Type: ConsumedManoInterfaceInfo | 83 |
| 5.6.3.9 | Type: CimNotificationsFilter | 84 |
| 5.6.3.10 | Type: ClockSyncInfo | 84 |
| 5.6.3.11 | Type: ServerInterfaceSecurityInfo..... | 85 |
| 5.6.3.12 | Type: ClientInterfaceSecurityInfo..... | 86 |
| 5.6.3.13 | Type: WimSpecificInfo..... | 86 |
| 5.6.3.14 | Type: CismSpecificInfo | 87 |
| 5.6.3.15 | Type: CirSpecificInfo..... | 88 |
| 5.6.3.16 | Type: CcmSpecificInfo | 88 |
| 5.6.3.17 | Type: MdafSpecificInfo | 89 |
| 5.6.3.18 | Type: CmfSpecificInfo..... | 89 |
| 5.6.4 | Referenced simple data types and enumerations | 90 |
| 5.6.4.1 | Introduction..... | 90 |
| 5.6.4.2 | Simple data types | 90 |
| 5.6.4.3 | Type: ManoServiceInterfaceTypeShortName..... | 90 |
| 5.6.4.4 | Enumeration: OperationalStateEnumType..... | 92 |
| 5.6.4.5 | Enumeration: AdministrativeStateEnumType | 92 |
| 5.6.4.6 | Enumeration: UsageStateEnumType | 93 |
| 5.6.4.7 | Enumeration: ChangeOperationalStateEnumType | 93 |
| 5.6.4.8 | Enumeration: ChangeAdministrativeStateEnumType | 93 |
| 5.6.4.9 | Enumeration: InterfaceOperationalStateEnumType..... | 93 |
| 5.6.4.10 | Enumeration: StopEnumType..... | 94 |
| 5.6.4.11 | Enumeration: ChangeStateOpOccStateEnumType | 94 |
| 5.6.4.12 | Enumeration: ManoEntityEnumType | 94 |
| 5.6.4.13 | Enumeration: PeerEntityEnumType..... | 94 |
| 5.7 | States and state transitions of an NFV-MANO functional entity | 95 |
| 5.7.1 | Introduction..... | 95 |
| 5.7.2 | States overview | 96 |
| 5.7.2.1 | Operational state | 96 |
| 5.7.2.2 | Administrative state | 96 |
| 5.7.2.3 | Usage state | 97 |
| 5.7.3 | State operations..... | 97 |
| 5.7.3.1 | Operational state changes and interface operations..... | 97 |
| 5.7.3.2 | Administrative state changes and interface operations | 98 |
| 6 | NFV-MANO Performance Management interface | 99 |
| 6.1 | Description | 99 |
| 6.2 | API version..... | 99 |
| 6.3 | Resource structure and methods..... | 99 |
| 6.4 | Sequence diagrams | 100 |
| 6.4.1 | Flow of creating a PM job | 100 |
| 6.4.1a | Flow of updating the callback URI of a PM job..... | 102 |
| 6.4.2 | Flow of querying/reading PM jobs | 102 |
| 6.4.3 | Flow of deleting a PM job | 103 |
| 6.4.4 | Flow of obtaining performance reports..... | 104 |
| 6.4.5 | Flow of creating a threshold | 104 |
| 6.4.5a | Flow of updating the callback URI of a threshold | 105 |
| 6.4.6 | Flow of querying/reading thresholds | 106 |
| 6.4.7 | Flow of deleting thresholds..... | 107 |
| 6.4.8 | Void..... | 107 |
| 6.4.9 | Flow of sending notifications..... | 107 |
| 6.5 | Resources | 108 |
| 6.5.1 | Introduction..... | 108 |
| 6.5.2 | Resource: API versions..... | 108 |
| 6.5.3 | Resource: PM jobs..... | 108 |
| 6.5.3.1 | Description | 108 |
| 6.5.3.2 | Resource definition | 108 |

| | | |
|------------|---|-----|
| 6.5.3.3 | Resource methods | 109 |
| 6.5.3.3.1 | POST | 109 |
| 6.5.3.3.2 | GET | 110 |
| 6.5.3.3.3 | PUT | 111 |
| 6.5.3.3.4 | PATCH..... | 111 |
| 6.5.3.3.5 | DELETE..... | 111 |
| 6.5.4 | Resource: Individual PM job | 112 |
| 6.5.4.1 | Description | 112 |
| 6.5.4.2 | Resource definition | 112 |
| 6.5.4.3 | Resource methods | 112 |
| 6.5.4.3.1 | POST | 112 |
| 6.5.4.3.2 | GET | 112 |
| 6.5.4.3.3 | PUT | 113 |
| 6.5.4.3.4 | PATCH..... | 113 |
| 6.5.4.3.5 | DELETE..... | 114 |
| 6.5.5 | Resource: Individual performance report | 114 |
| 6.5.5.1 | Description | 114 |
| 6.5.5.2 | Resource definition | 114 |
| 6.5.5.3 | Resource methods | 115 |
| 6.5.5.3.1 | POST | 115 |
| 6.5.5.3.2 | GET | 115 |
| 6.5.5.3.3 | PUT | 115 |
| 6.5.5.3.4 | PATCH..... | 115 |
| 6.5.5.3.5 | DELETE..... | 115 |
| 6.5.6 | Resource: Thresholds..... | 115 |
| 6.5.6.1 | Description | 115 |
| 6.5.6.2 | Resource definition | 116 |
| 6.5.6.3 | Resource methods | 116 |
| 6.5.6.3.1 | POST | 116 |
| 6.5.6.3.2 | GET | 117 |
| 6.5.6.3.3 | PUT | 118 |
| 6.5.6.3.4 | PATCH..... | 118 |
| 6.5.6.3.5 | DELETE..... | 118 |
| 6.5.7 | Resource: Individual threshold | 118 |
| 6.5.7.1 | Description | 118 |
| 6.5.7.2 | Resource definition | 119 |
| 6.5.7.3 | Resource methods | 119 |
| 6.5.7.3.1 | POST | 119 |
| 6.5.7.3.2 | GET | 119 |
| 6.5.7.3.3 | PUT | 119 |
| 6.5.7.3.4 | PATCH..... | 120 |
| 6.5.7.3.5 | DELETE..... | 121 |
| 6.5.8 | Void | 121 |
| 6.5.9 | Void | 121 |
| 6.5.10 | Resource: Notification endpoint | 121 |
| 6.5.10.1 | Description | 121 |
| 6.5.10.2 | Resource definition | 121 |
| 6.5.10.3 | Resource methods | 122 |
| 6.5.10.3.1 | POST | 122 |
| 6.5.10.3.2 | GET | 122 |
| 6.5.10.3.3 | PUT | 123 |
| 6.5.10.3.4 | PATCH..... | 123 |
| 6.5.10.3.5 | DELETE..... | 123 |
| 6.6 | Data model | 123 |
| 6.6.1 | Introduction..... | 123 |
| 6.6.2 | Resource and notification data types | 123 |
| 6.6.2.1 | Introduction..... | 123 |
| 6.6.2.2 | Void..... | 123 |
| 6.6.2.3 | Void..... | 123 |
| 6.6.2.4 | Type: ThresholdCrossedNotification | 123 |
| 6.6.2.5 | Type: PerformanceInformationAvailableNotification | 124 |
| 6.6.2.6 | Type: CreatePmJobRequest | 125 |

| | | |
|-----------|---|-----|
| 6.6.2.7 | Type: PmJob | 126 |
| 6.6.2.8 | Type: CreateThresholdRequest | 127 |
| 6.6.2.9 | Type: Threshold | 127 |
| 6.6.2.10 | Type: PerformanceReport | 128 |
| 6.6.2.11 | Type: PmJobModifications | 129 |
| 6.6.2.12 | Type: ThresholdModifications | 129 |
| 6.6.3 | Referenced structured data types | 129 |
| 6.6.3.1 | Introduction | 129 |
| 6.6.3.2 | Void | 129 |
| 6.6.3.3 | Type: PmJobCriteria | 129 |
| 6.6.3.4 | Type: ThresholdCriteria | 130 |
| 6.6.4 | Referenced simple data types and enumerations | 131 |
| 6.6.4.1 | Introduction | 131 |
| 6.6.4.2 | Simple data types | 131 |
| 6.6.4.3 | Enumeration: CrossingDirectionType | 131 |
| 7 | NFV-MANO Fault Management interface | 131 |
| 7.1 | Description | 131 |
| 7.2 | API version | 132 |
| 7.3 | Resource structure and method | 132 |
| 7.4 | Sequence diagrams | 133 |
| 7.4.1 | Flow of the Get Alarm List operation | 133 |
| 7.4.2 | Flow of acknowledging alarm | 134 |
| 7.4.3 | Flow of managing subscriptions | 134 |
| 7.4.4 | Flow of sending notifications | 137 |
| 7.5 | Resources | 137 |
| 7.5.1 | Introduction | 137 |
| 7.5.2 | Resource: API versions | 137 |
| 7.5.3 | Resource: Alarms | 137 |
| 7.5.3.1 | Description | 137 |
| 7.5.3.2 | Resource definition | 138 |
| 7.5.3.3 | Resource methods | 138 |
| 7.5.3.3.1 | POST | 138 |
| 7.5.3.3.2 | GET | 138 |
| 7.5.3.3.3 | PUT | 139 |
| 7.5.3.3.4 | PATCH | 139 |
| 7.5.3.3.5 | DELETE | 139 |
| 7.5.4 | Resource: Individual alarm | 139 |
| 7.5.4.1 | Description | 139 |
| 7.5.4.2 | Resource definition | 140 |
| 7.5.4.3 | Resource methods | 140 |
| 7.5.4.3.1 | POST | 140 |
| 7.5.4.3.2 | GET | 140 |
| 7.5.4.3.3 | PUT | 140 |
| 7.5.4.3.4 | PATCH | 141 |
| 7.5.4.3.5 | DELETE | 141 |
| 7.5.5 | Resource: Subscriptions | 142 |
| 7.5.5.1 | Description | 142 |
| 7.5.5.2 | Resource definition | 142 |
| 7.5.5.3 | Resource methods | 142 |
| 7.5.5.3.1 | POST | 142 |
| 7.5.5.3.2 | GET | 143 |
| 7.5.5.3.3 | PUT | 145 |
| 7.5.5.3.4 | PATCH | 145 |
| 7.5.5.3.5 | DELETE | 145 |
| 7.5.6 | Resource: Individual subscription | 145 |
| 7.5.6.1 | Description | 145 |
| 7.5.6.2 | Resource definition | 145 |
| 7.5.6.3 | Resource methods | 145 |
| 7.5.6.3.1 | POST | 145 |
| 7.5.6.3.2 | GET | 145 |
| 7.5.6.3.3 | PUT | 146 |

| | | |
|-----------|---|-----|
| 7.5.6.3.4 | PATCH | 146 |
| 7.5.6.3.5 | DELETE | 146 |
| 7.5.7 | Resource: Notification endpoint | 147 |
| 7.5.7.1 | Description | 147 |
| 7.5.7.2 | Resource definition | 147 |
| 7.5.7.3 | Resource methods | 147 |
| 7.5.7.3.1 | POST | 147 |
| 7.5.7.3.2 | GET | 148 |
| 7.5.7.3.3 | PUT | 148 |
| 7.5.7.3.4 | PATCH | 148 |
| 7.5.7.3.5 | DELETE | 148 |
| 7.6 | Data model | 148 |
| 7.6.1 | Introduction | 148 |
| 7.6.2 | Resource and notification data types | 148 |
| 7.6.2.1 | Introduction | 148 |
| 7.6.2.2 | Type: FmSubscriptionRequest | 149 |
| 7.6.2.3 | Type: FmSubscription | 149 |
| 7.6.2.4 | Type: Alarm | 149 |
| 7.6.2.5 | Type: AlarmNotification | 150 |
| 7.6.2.6 | Type: AlarmClearedNotification | 150 |
| 7.6.2.7 | Type: AlarmListRebuiltNotification | 151 |
| 7.6.2.8 | Type: AlarmModifications | 151 |
| 7.6.3 | Referenced structured data types | 152 |
| 7.6.3.1 | Introduction | 152 |
| 7.6.3.2 | Type: FmNotificationsFilter | 152 |
| 7.6.4 | Referenced simple data types and enumerations | 152 |
| 7.6.4.1 | Introduction | 152 |
| 7.6.4.2 | Simple data types | 152 |
| 7.6.4.3 | Enumeration: PerceivedSeverityType | 152 |
| 7.6.4.4 | Enumeration: EventType | 153 |
| 8 | NFV-MANO Log Management interface | 153 |
| 8.1 | Description | 153 |
| 8.2 | API version | 154 |
| 8.3 | Resource structure and method | 154 |
| 8.4 | Sequence diagrams | 155 |
| 8.4.1 | Flow of creating a logging job | 155 |
| 8.4.2 | Flow of querying/reading logging jobs | 156 |
| 8.4.3 | Flow of deleting a logging job | 157 |
| 8.4.4 | Flow of obtaining log reports | 157 |
| 8.4.5 | Flow of managing subscriptions | 158 |
| 8.4.6 | Flow of sending notifications | 161 |
| 8.4.7 | Flow of on-demand request to compile log data into file | 161 |
| 8.5 | Resources | 163 |
| 8.5.1 | Introduction | 163 |
| 8.5.2 | Resource: API versions | 163 |
| 8.5.3 | Resource: Logging jobs | 163 |
| 8.5.3.1 | Description | 163 |
| 8.5.3.2 | Resource definition | 163 |
| 8.5.3.3 | Resource methods | 164 |
| 8.5.3.3.1 | POST | 164 |
| 8.5.3.3.2 | GET | 164 |
| 8.5.3.3.3 | PUT | 166 |
| 8.5.3.3.4 | PATCH | 166 |
| 8.5.3.3.5 | DELETE | 166 |
| 8.5.4 | Resource: Individual logging job | 167 |
| 8.5.4.1 | Description | 167 |
| 8.5.4.2 | Resource definition | 167 |
| 8.5.4.3 | Resource methods | 167 |
| 8.5.4.3.1 | POST | 167 |
| 8.5.4.3.2 | GET | 167 |
| 8.5.4.3.3 | PUT | 168 |

| | | |
|-----------|--|-----|
| 8.5.4.3.4 | PATCH | 168 |
| 8.5.4.3.5 | DELETE | 168 |
| 8.5.5 | Resource: Individual log report | 168 |
| 8.5.5.1 | Description | 168 |
| 8.5.5.2 | Resource definition | 168 |
| 8.5.5.3 | Resource methods | 169 |
| 8.5.5.3.1 | POST | 169 |
| 8.5.5.3.2 | GET | 169 |
| 8.5.5.3.3 | PUT | 169 |
| 8.5.5.3.4 | PATCH | 170 |
| 8.5.5.3.5 | DELETE | 170 |
| 8.5.6 | Resource: Compile log task | 170 |
| 8.5.6.1 | Description | 170 |
| 8.5.6.2 | Resource definition | 170 |
| 8.5.6.3 | Resource methods | 170 |
| 8.5.6.3.1 | POST | 170 |
| 8.5.6.3.2 | GET | 172 |
| 8.5.6.3.3 | PUT | 172 |
| 8.5.6.3.4 | PATCH | 172 |
| 8.5.6.3.5 | DELETE | 172 |
| 8.5.7 | Resource: Subscriptions | 172 |
| 8.5.7.1 | Description | 172 |
| 8.5.7.2 | Resource definition | 172 |
| 8.5.7.3 | Resource methods | 172 |
| 8.5.7.3.1 | POST | 172 |
| 8.5.7.3.2 | GET | 173 |
| 8.5.7.3.3 | PUT | 175 |
| 8.5.7.3.4 | PATCH | 175 |
| 8.5.7.3.5 | DELETE | 175 |
| 8.5.8 | Resource: Individual subscription | 175 |
| 8.5.8.1 | Description | 175 |
| 8.5.8.2 | Resource definition | 175 |
| 8.5.8.3 | Resource methods | 175 |
| 8.5.8.3.1 | POST | 175 |
| 8.5.8.3.2 | GET | 175 |
| 8.5.8.3.3 | PUT | 176 |
| 8.5.8.3.4 | PATCH | 176 |
| 8.5.8.3.5 | DELETE | 176 |
| 8.5.9 | Resource: Notification endpoint | 177 |
| 8.5.9.1 | Description | 177 |
| 8.5.9.2 | Resource definition | 177 |
| 8.5.9.3 | Resource methods | 177 |
| 8.5.9.3.1 | POST | 177 |
| 8.5.9.3.2 | GET | 178 |
| 8.5.9.3.3 | PUT | 178 |
| 8.5.9.3.4 | PATCH | 178 |
| 8.5.9.3.5 | DELETE | 178 |
| 8.6 | Data model | 179 |
| 8.6.1 | Introduction | 179 |
| 8.6.2 | Resource and notification data types | 179 |
| 8.6.2.1 | Introduction | 179 |
| 8.6.2.2 | Type: LogmSubscriptionRequest | 179 |
| 8.6.2.3 | Type: LogmSubscription | 179 |
| 8.6.2.4 | Type: LogReportAvailableNotification | 179 |
| 8.6.2.5 | Type: CreateLoggingJobRequest | 180 |
| 8.6.2.6 | Type: LoggingJob | 180 |
| 8.6.2.7 | Type: LogReport | 181 |
| 8.6.2.8 | Type: CompileLogRequest | 183 |
| 8.6.3 | Referenced structured data types | 183 |
| 8.6.3.1 | Introduction | 183 |
| 8.6.3.2 | Type: LoggingJobCriteria | 183 |
| 8.6.3.3 | Type: LoggingJobMessagesCriteria | 184 |

| | | |
|--|---|------------|
| 8.6.3.4 | Type: LoggingJobServicesCriteria..... | 185 |
| 8.6.3.5 | Type: LoggingJobSystemCriteria | 186 |
| 8.6.3.6 | Type: LoggingJobConfig | 186 |
| 8.6.3.7 | Type: LogmNotificationsFilter | 189 |
| 8.6.4 | Referenced simple data types and enumerations | 189 |
| Annex A (informative): Mapping operations to protocol elements..... | | 190 |
| A.1 | Overview | 190 |
| A.2 | NFV-MANO configuration and information management interface..... | 190 |
| A.3 | NFV-MANO performance management interface..... | 191 |
| A.4 | NFV-MANO fault management interface..... | 191 |
| A.5 | NFV-MANO log management interface..... | 192 |
| Annex B (normative): Authorization scope values | | 193 |
| B.1 | Overview | 193 |
| B.2 | NFV-MANO Configuration and Information Management interface | 193 |
| B.3 | NFV-MANO Performance Management interface | 194 |
| B.4 | NFV-MANO Fault Management interface | 196 |
| B.5 | NFV-MANO Log Management interface | 196 |
| Annex C (informative): Change history | | 198 |
| History | | 201 |

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

This Group Specification (GS) has been produced by ETSI Industry Specification Group (ISG) Network Functions Virtualisation (NFV).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document specifies a set of RESTful protocols and data models fulfilling the requirements specified in ETSI GS NFV-IFA 031 [1] for the interfaces that enable the management of NFV-MANO functional entities.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] [ETSI GS NFV-IFA 031](#): "Network Functions Virtualisation (NFV) Release 5; Management and Orchestration; Requirements and interfaces specification for management of NFV-MANO".
- [2] [Recommendation ITU-T X.733](#): "Information technology - Open Systems Interconnection - Systems Management: Alarm reporting function".
- [3] [IETF RFC 7396](#): "JSON Merge Patch".
- [4] [ETSI GS NFV-SOL 013](#): "Network Functions Virtualisation (NFV) Release 5; Protocols and Data Models; Specification of common aspects for RESTful NFV MANO APIs".
- [5] [ETSI GS NFV-SEC 022](#): "Network Functions Virtualisation (NFV) Release 4; Security; Access Token Specification for API Access".
- [6] [IETF RFC 8447](#): "IANA Registry Updates for TLS and DTLS".
- [7] Void.
- [8] [IETF RFC 5424](#): "The Syslog Protocol".
- [9] [ETSI GS NFV-SOL 002](#): "Network Functions Virtualisation (NFV) Release 5; Protocols and Data Models; RESTful protocols specification for the Ve-Vnfm Reference Point".
- [10] [ETSI GS NFV-SOL 003](#): "Network Functions Virtualisation (NFV) Release 5; Protocols and Data Models; RESTful protocols specification for the Or-Vnfm Reference Point".
- [11] [ETSI GS NFV-SOL 005](#): "Network Functions Virtualisation (NFV) Release 5; Protocols and Data Models; RESTful protocols specification for the Os-Ma-nfvo Reference Point".
- [12] [ETSI GS NFV-SEC 012](#): "Network Functions Virtualisation (NFV) Release 3; Security; System architecture specification for execution of sensitive NFV components".
- [13] [ETSI GS NFV-SOL 011](#): "Network Functions Virtualisation (NFV) Release 4; Protocols and Data Models; RESTful protocols specification for the Or-Or Reference Point".
- [14] [ETSI GS NFV-SOL 012](#): "Network Functions Virtualisation (NFV) Release 4; Protocols and Data Models; RESTful protocols specification for the Policy Management Interface".
- [15] [IETF RFC 9110](#): "HTTP Semantics".
- [16] [IETF RFC 5789](#): "PATCH Method for HTTP".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI GR NFV 003: "Network Functions Virtualisation (NFV); Terminology for Main Concepts in NFV".
- [i.2] ETSI GS NFV-IFA 011: "Network Functions Virtualisation (NFV) Release 5; Management and Orchestration; VNF Descriptor and Packaging Specification".
- [i.3] ETSI GS NFV 006: "Network Functions Virtualisation (NFV) Release 4; Management and Orchestration; Architectural Framework Specification".
- [i.4] ETSI GS NFV-IFA 010: "Network Functions Virtualisation (NFV) Release 5; Management and Orchestration; Functional requirements specification".
- [i.5] ETSI GS NFV-IFA 005: "Network Functions Virtualisation (NFV) Release 5; Management and Orchestration; Or-Vi reference point - Interface and Information Model Specification".
- [i.6] ETSI GS NFV-IFA 006: "Network Functions Virtualisation (NFV) Release 5; Management and Orchestration; Vi-Vnfm reference point - Interface and Information Model Specification".
- [i.7] ETSI GS NFV-IFA 007: "Network Functions Virtualisation (NFV) Release 5; Management and Orchestration; Or-Vnfm reference point - Interface and Information Model Specification".
- [i.8] ETSI GS NFV-IFA 008: "Network Functions Virtualisation (NFV) Release 5; Management and Orchestration; Ve-Vnfm reference point - Interface and Information Model Specification".
- [i.9] ETSI GS NFV-IFA 013: "Network Functions Virtualisation (NFV) Release 5; Management and Orchestration; Os-Ma-nfvo reference point - Interface and Information Model Specification".
- [i.10] Recommendation ITU-T X.731: "Information technology - Open Systems Interconnection - Systems Management: State management function".
- [i.11] [IETF RFC 2228](#): "FTP Security Extensions".
- [i.12] [IETF RFC 4217](#): "Securing FTP with TLS".
- [i.13] IANA: "[Hypertext Transfer Protocol \(HTTP\) Status Code Registry](#)".
- [i.14] [IETF RFC 5246](#): "The Transport Layer Security (TLS) Protocol Version 1.2".
- [i.15] [IETF RFC 6749](#): "The OAuth 2.0 Authorization Framework".
- [i.16] ETSI GS NFV-SOL 001: "Network Functions Virtualisation (NFV) Release 5; Protocols and Data Models; NFV descriptors based on TOSCA specification".
- [i.17] ETSI GS NFV-SOL 006: "Network Functions Virtualisation (NFV) Release 4; Protocols and Data Models; NFV descriptors based on YANG Specification".
- [i.18] ETSI GS NFV-IFA 032: "Network Functions Virtualisation (NFV) Release 5; Management and Orchestration; Interface and Information Model Specification for Multi-Site Connectivity Services".
- [i.19] [IETF RFC 7432](#): "BGP MPLS-Based Ethernet VPN".
- [i.20] [IETF RFC 4761](#): "Virtual Private LAN Service (VPLS) Using BGP for Auto-Discovery and Signaling".

- [i.21] [IETF RFC 6624](#): "Layer 2 Virtual Private Networks Using BGP for Auto-Discovery and Signaling".
- [i.22] [IETF RFC 4762](#): "Virtual Private LAN Service (VPLS) Using Label Distribution Protocol (LDP) Signaling".
- [i.23] [IETF RFC 6074](#): "Provisioning, Auto-Discovery, and Signaling in Layer 2 Virtual Private Networks (L2VPNs)".
- [i.24] [IETF RFC 4364](#): "BGP/MPLS IP Virtual Private Networks (VPNs)".
- [i.25] [IETF RFC 8214](#): "Virtual Private Wire Service Support in Ethernet VPN".
- [i.26] [NIST Special Publication 800-57 Part 3 Revision 1](#): "Recommendation for Key Management, Part 3: Application-Specific Key Management Guidance".
- [i.27] ETSI GS NFV-IFA 040: "Network Functions Virtualisation (NFV) Release 5; Management and Orchestration; Requirements for service interfaces and object model for OS container management and orchestration specification".
- [i.28] [IETF RFC 8446](#): "The Transport Layer Security (TLS) Protocol Version 1.3".
- [i.29] ETSI GS NFV-IFA 036: "Network Functions Virtualisation (NFV) Release 5; Management and Orchestration; Requirements for service interfaces and object model for container cluster management and orchestration specification".
- [i.30] ETSI GS NFV-IFA 047: "Network Functions Virtualisation (NFV) Release 5; Management and Orchestration; Management data analytics Service Interface and Information Model specification".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in ETSI GR NFV 003 [i.1], ETSI GS NFV-IFA 031 [1] and the following apply:

NOTE: A term defined in the present document takes precedence over the definition of the same term, if any, in the documents listed above.

NFV-MANO management interfaces: interfaces for managing the NFV-MANO functional entities

NOTE: The protocols and data models of the NFV-MANO management interfaces are defined in the present document.

peer functional entity: functional entity from which interfaces are consumed by the producer NFV-MANO functional entity

NOTE: In the present document, "peer entity" is also used interchangeably.

producer NFV-MANO functional entity: NFV-MANO functional entity that produces the NFV-MANO management interfaces

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in ETSI GR NFV 003 [i.1], ETSI GS NFV-IFA 031 [1] and the following apply:

| | |
|------|------------------------------------|
| BGP | Border Gateway Protocol |
| CMF | Certificate Management Function |
| EVPN | Ethernet VPN |
| L2TP | Layer 2 Tunnelling Protocol |
| LDP | Label Distribution Protocol |
| MDAF | Management Data Analytics Function |
| MPLS | Multiprotocol Label Switching |
| VPLS | Virtual Private LAN Service |
| VPN | Virtual Private Network |
| VPWS | Virtual Private Wire Service |

4 General aspects

4.1 Overview

The present document defines the protocol and data model for the interfaces used for the management of NFV-MANO functional entities, in the form of RESTful Application Programming Interface (API) specifications:

- NFV-MANO configuration and information management interface;
- NFV-MANO performance management interface;
- NFV-MANO fault management interface;
- NFV-MANO log management interface.

Table 4.1-1 lists the versions of the APIs defined in the present document.

Table 4.1-1: Versions of the APIs specified in the present document

| API | API version |
|---|-------------|
| NFV-MANO configuration and information management interface | 2.13.0 |
| NFV-MANO performance management interface | 2.1.0 |
| NFV-MANO fault management interface | 1.1.0 |
| NFV-MANO log management interface | 1.1.0 |

The interfaces are produced by the NFV-MANO functional entity, which acts as API producer, and can be consumed by an authorized external entity, which acts as API consumer. For more information, clause 4.2 of ETSI GS NFV-IFA 031 [1] defines the framework for the management of NFV-MANO.

The design of the protocol and data model for the above interfaces is based on the information model and requirements defined in ETSI GS NFV-IFA 031 [1]. In clause 4, general aspects such as common data types are specified that apply to multiple APIs produced by the NFV-MANO functional entity. In addition, the provisions in clauses 4, 5, 6, 8 and 9 of ETSI GS NFV-SOL 013 [4] define common aspects of RESTful NFV-MANO APIs, and shall apply for all APIs defined in the present document.

In the subsequent clauses, the protocol and data model for the individual interfaces are specified. Per interface, the resource structure with associated HTTP methods is defined and applicable flows are provided. Further, the resources and the data model are specified in detail.

Annex A provides the mapping of the combination of resources and methods defined in the present document to the operations defined in ETSI GS NFV-IFA 031 [1].

Even though the different interfaces defined in the present document are related, implementations shall not assume a particular order of messages that arrive via different interfaces.

4.2 NFV-MANO management concepts

4.2.1 Introduction

The framework for the management of NFV-MANO functional entities is specified in clause 4.2 of ETSI GS NFV-IFA 031 [1]. The framework is based on the definition and exposure of a set of management interfaces by the NFV-MANO functional entities. The data model and protocol specification of these interfaces is the scope of the present document.

4.2.2 NFV-MANO functional entity composition

4.2.2.1 NFV-MANO functional entity

An NFV-MANO functional entity represents a realization of a functional block part of the NFV-MANO architectural framework as specified in ETSI GS NFV 006 [i.3]. The following NFV-MANO functional blocks are identified:

- NFV Orchestrator (NFVO);
- VNF Manager (VNFM); and
- Virtualised Infrastructure Manager (VIM).

In addition, ETSI GS NFV-IFA 010 [i.4] defines the case of the WAN Infrastructure Manager (WIM) as part of the NFV-MANO framework.

To support the management and orchestration of OS containers in CIS clusters and the management of OS container software images, ETSI GS NFV-IFA 010 [i.4] also introduces the NFV-MANO function Container Infrastructure Service Management (CISM) and Container Image Registry (CIR). To support the management and orchestration of CIS clusters, ETSI GS NFV-IFA 010 [i.4] also introduces the NFV-MANO function CIS Cluster Management (CCM). To support additional automation features in the NFV-MANO, ETSI GS NFV-IFA 010 [i.4] introduces the NFV-MANO function of Management Data Analytics Function (MDAF).

The functional requirements for the NFVO, VNFM, VIM, WIM, CIR, CISM, CCM and MDAF are specified in ETSI GS NFV-IFA 010 [i.4]. The APIs specified in the present document allow an API consumer to manage an NFV-MANO functional entity and fulfil the configuration, monitoring and retrieval of relevant information enabling the maintenance and operation of the NFV-MANO by the service provider. In the present document, the NFV-MANO functional entity that is being managed is also referred as "producer NFV-MANO functional entity", in reference to the entity "producing" the set of NFV-MANO management interface.

An NFV-MANO functional entity is a managed object on which (not an exhaustive list):

- performance measurements related to resources used by the entity can be collected/reported;
- information about the entity can be collected;
- various parameters about the entity can be configured; and
- fault information about the entity can be notified and collected.

Figure 4.2.2.1-1 illustrates an example of the relationship between the different concepts introduced in the present and following clauses. A description of the example is available in clause 4.3 of ETSI GS NFV-IFA 031 [1].

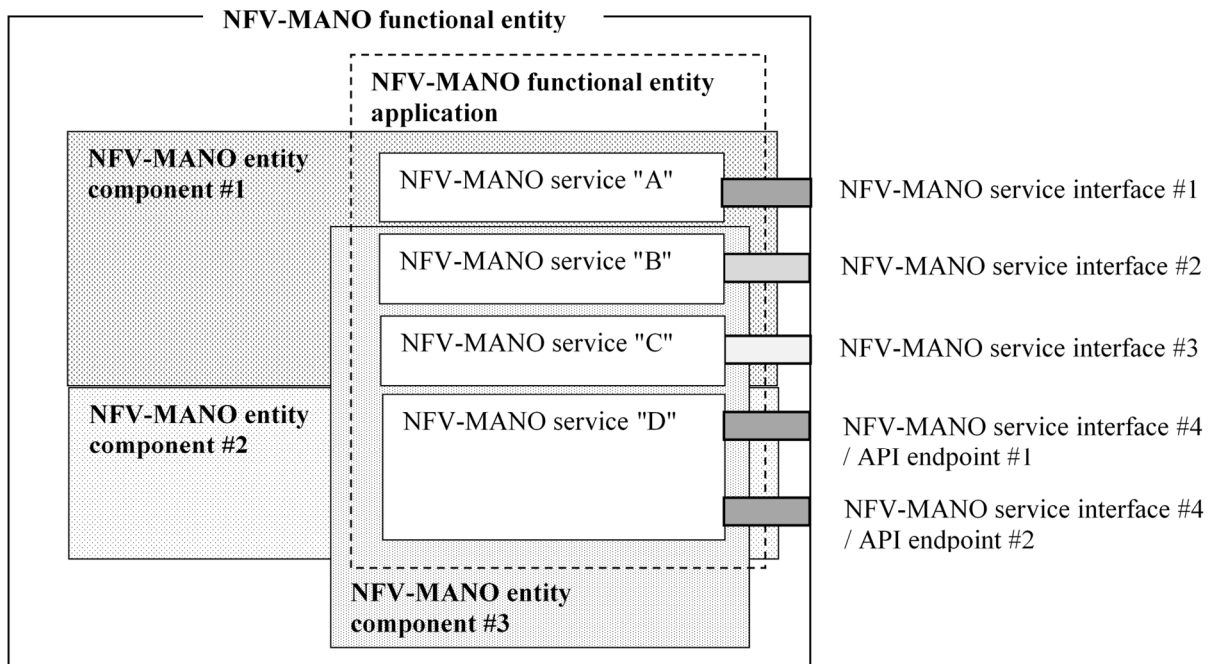


Figure 4.2.2.1-1: Example of relationship between NFV-MANO functional entity, NFV-MANO functional entity application, NFV-MANO service and NFV-MANO service interface (from ETSI GS NFV-IFA 031 [1])

4.2.2.2 NFV-MANO service

As specified in ETSI GS NFV-IFA 031 [1], an NFV-MANO functional entity provides NFV-MANO services. An NFV-MANO service corresponds to one or more capabilities offered by the NFV-MANO functional entity using a defined interface. The NFV-MANO service represents the "backend handler" of the corresponding interface.

EXAMPLE 1: The VNFM offers an NFV-MANO service for VNF lifecycle management. The NFVO offers an NFV-MANO service for NS lifecycle management.

The types of NFV-MANO services offered by an NFV-MANO functional entity are determined by the set of NFV-MANO service interfaces exposed by the producer NFV-MANO functional entity. The relationship of a type of NFV-MANO service and a type of NFV-MANO service interface is 1:1 (see clause 4.3 of ETSI GS NFV-IFA 031 [1]).

EXAMPLE 2: A VNFM that exposes the following set of interfaces: [VNF lifecycle management interface, VNF performance management interface, VNF fault management interface, and VNF indicator interface] is regarded to support the following set of NFV-MANO services: [VNF lifecycle management, VNF performance management, VNF fault management, and VNF indicator].

There can be dependencies among the set of NFV-MANO services offered by an NFV-MANO functional entity. Such dependencies impact the NFV-MANO management functionality that can be performed on the NFV-MANO services. Therefore, from the NFV-MANO management perspective, an NFV-MANO service is a managed object on the producer NFV-MANO functional entity, on which only:

- performance measurements can be collected/reported; and
- information about the service can be collected.

NOTE: The present document does not specify the implementation dependencies among NFV-MANO services, if any.

4.2.2.3 NFV-MANO service interface

An NFV-MANO service interface is an interface, associated to an NFV-MANO service, over which operations can be invoked and/or notifications issued (see ETSI GS NFV-IFA 031 [1]). The set of NFV-MANO service interfaces that can be produced by a given NFV-MANO functional entity is the set of interfaces specified in the respective information model (stage 2) and data model and protocol (stage 3) specifications.

EXAMPLE: The set of interfaces exposed by the VNFM are specified (at stage 3) in the ETSI GS NFV-SOL 002 [9] and ETSI GS NFV-SOL 003 [10], and include: VNF lifecycle management interface, VNF performance management interface, VNF fault management interface, and VNF indicator interface.

An NFV-MANO service interface is a managed object on the producer NFV-MANO functional entity, on which (not an exhaustive list):

- performance measurements can be collected/reported;
- information about the interface can be collected;
- various parameters about the interface can be configured; and
- the administrative and operational state can be changed.

4.2.2.4 NFV-MANO functional entity application and NFV-MANO functional entity components

For management purposes, an NFV-MANO functional entity is comprised of a set of NFV-MANO functional entity components and an NFV-MANO functional entity application.

Furthermore, an NFV-MANO functional entity can be decomposed into a set of NFV-MANO functional entity components to address functional requirements such as the implementation of the functionality exposed over the NFV-MANO service interfaces, which can in turn influence the dependency among the set of NFV-MANO services, and non-functional requirements such as scalability, resiliency, versioning, etc.

NOTE: It is out of scope of the present document how many NFV-MANO functional entity components and what sub-set of instances of NFV-MANO services is to be supported by an NFV-MANO functional entity component.

4.2.3 Peer functional entity and consumed NFV-MANO interfaces

The NFV-MANO architectural framework specifies a set of reference points in between the NFV-MANO functional blocks (i.e. the Or-Vi, Or-Vnfm and Vi-Vnfm reference points, hereafter referred to as "internal NFV-MANO reference points") and from the NFV-MANO functional blocks to other external entities (i.e. Nf-Vi, Ve-Vnfm-em/vnf, and Os-Ma-nfvo reference points, hereafter referred to as "external NFV-MANO reference points"). The reference points determine points of interaction in between the participating entities.

For the specific case of the "internal NFV-MANO reference points", an NFV-MANO functional entity can consume NFV-MANO services from another NFV-MANO functional entity.

EXAMPLE 1: The NFVO consumes NFV-MANO services from the VIM over the Or-Vi reference point, and NFV-MANO services from the VNFM over the Or-Vnfm reference point.

For the specific case of the "external NFV-MANO reference points", an NFV-MANO functional entity can consume interfaces from an external entity.

In both contexts (i.e. internal and external reference points interactions), for a given NFV-MANO functional entity exists a "peering" relationship towards another entity. To establish such a peering relationship and consume NFV-MANO services from the peer entity, the managed NFV-MANO functional entity needs to be made aware of such interaction availability.

EXAMPLE 2: Assuming a scenario with three NFV-MANO functional entities corresponding to one NFVO, one VNFM and one VIM, and the NFVO is the entity being managed (the target of management). In this scenario, the NFVO connects to and makes use of NFV-MANO services offered by the VNFM and the VIM. From NFVO's perspective, the VNFM and VIM are the peer NFV-MANO entities. Therefore, the NFVO, as a managed entity, holds information and configuration related to how to interact/communicate with the VNFM and VIM.

Part of the configuration and information of a peer functional entity concerns to the usage of the interfaces exposed by the peer functional entity. The consuming side of the interface, which is the responsibility of the NFV-MANO functional entity being managed is referred as "consumed interface". A consumed interface is also a managed object on the producer NFV-MANO functional entity, on which (not an exhaustive list):

- performance measurements can be collected/reported;
- information about the interface can be collected; and
- various parameters about the interface can be configured.

Figure 4.2.3-1 illustrates an example depicting an NFVO, a VNFM and two NFV-MANO management consumers who can manage the two entities using the produced NFV-MANO management interfaces. From the point of view of the consumer #1, who manages the NFVO, configuration and information with regards to the VNFM as a peer entity of the NFVO can be set, particularly in this example, information and configuration about the interfaces that can be consumed from the VNFM. Similarly, the consumer #2 can do the same with regards to NFVO, which is a peer NFV-MANO entity from the VNFM's perspective.

NOTE: For the sake of simplicity, the example and figure do not illustrate all resources involved in the management of the NFVO and the VNFM; in particular those involved in the configuration and information of the managed entities, the NFVO for the consumer #1, and the VNFM for the consumer #2.

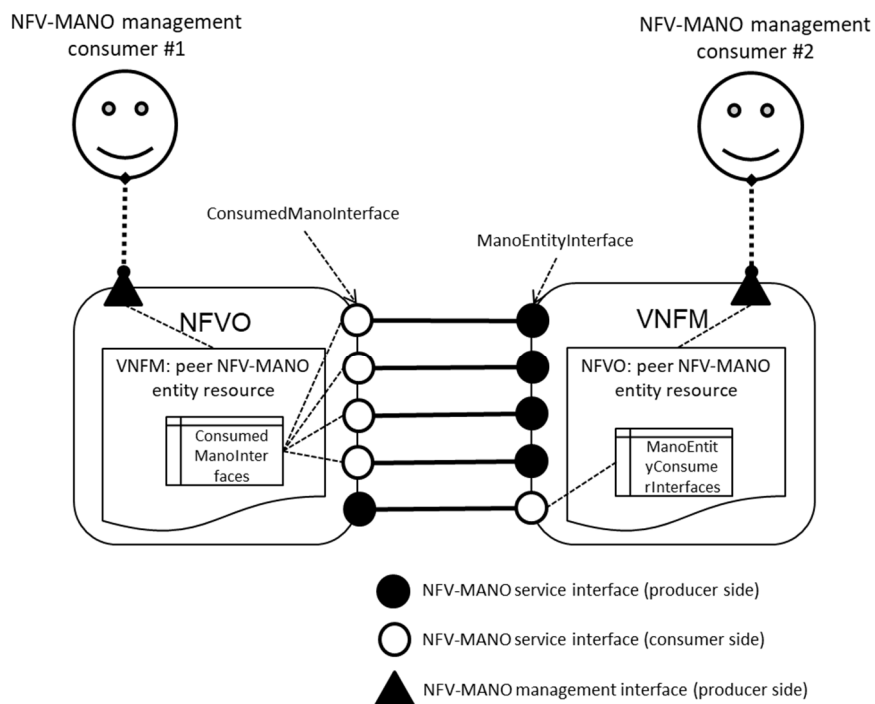


Figure 4.2.3-1: Example of peering between an NFVO and VNFM

4.2.4 Consumption of NFV-MANO management APIs

Clause 4.2 of ETSI GS NFV-IFA 031 [1] specifies the framework for the management of NFV-MANO. The present specification specifies the NFV-MANO management APIs. The APIs are produced by the NFV-MANO functional entity, which acts as API producer, and can be consumed by an authorized external entity, which acts as API consumer. A specific instance of NFV-MANO functional entity that exposes such an API is also referred as "producer NFV-MANO functional entity". An example of API consumer is an external entity to NFV-MANO, such as a "MANO monitor entity" within the OSS/BSS of the service provider (see clause 4.2.2 of ETSI GS NFV-IFA 031 [1]). Under proper security control other NFV-MANO functional entities may be allowed to act as an API consumer to consume certain NFV-MANO management services and functionality (see clause 4.2.3 of ETSI GS NFV-IFA 031 [1]).

4.3 Common data types

4.3.1 General

The data type definitions in clause 7.1 of ETSI GS NFV-SOL 013 [4] apply.

4.3.2 Structured data types

4.3.2.1 Introduction

This clause defines data structures that are referenced from data structures in multiple interfaces. In addition, the structured data types defined in clause 7.1 of ETSI GS NFV-SOL 013 [4] shall apply.

4.3.2.2 Type: ManoEntitySubscriptionFilter

This type represents subscription filter criteria to match NFV-MANO functional entities and their associated managed objects. It shall comply with the provisions defined in table 4.3.2.2-1.

Table 4.3.2.2-1: Definition of the ManoEntitySubscriptionFilter data type

| Attribute name | Data type | Cardinality | Description |
|---------------------------|------------------------|-------------|--|
| manoEntityId | Identifier | 0..1 | If present, match the NFV-MANO functional entity with an instance identifier listed in this attribute. |
| manoServiceIds | IdentifierInManoEntity | 0..N | If present, match NFV-MANO services with an instance identifier listed in this attribute. See note 1. |
| manoServiceNames | String | 0..N | If present, match NFV-MANO services with an NFV-MANO service name listed in this attribute. See note 1. |
| manoServiceInterfaceIds | IdentifierInManoEntity | 0..N | If present, match NFV-MANO functional entity produced interfaces with an instance identifier listed in this attribute. See note 2. |
| manoServiceInterfaceNames | String | 0..N | If present, match NFV-MANO functional entity produced interfaces with an instance Name listed in this attribute. See note 2. |
| consumedManoInterfaceIds | Identifier | 0..N | If present, match NFV-MANO functional entity consumed interfaces with an instance identifier listed in this attribute. See note 3. |

| Attribute name | Data type | Cardinality | Description |
|---|-----------|-------------|---|
| consumedManoInterfaceNames | String | 0..N | If present, match NFV-MANO functional entity consumed interfaces with an instance Name listed in this attribute. See note 3. |
| NOTE 1: The attributes "manoServiceIds" and "manoServiceNames" are alternatives to reference to NFV-MANO services in a filter. They should not be used together in the same filter instance, but one alternative should be chosen. | | | |
| NOTE 2: The attributes "manoServiceInterfaceIds" and "manoServiceInterfaceNames" are alternatives to reference to NFV-MANO functional entity produced interfaces in a filter. They should not be used both in the same filter instance, but one alternative should be chosen. | | | |
| NOTE 3: The attributes "consumedManoInterfaceIds" and "consumedManoInterfaceNames" are alternatives to reference to NFV-MANO functional entity consumed interfaces in a filter. They should not be used both in the same filter instance, but one alternative should be chosen. | | | |

4.3.2.3 Type: ManoManagedObjectReference

This type represents the identifier to reference a managed object of a particular type. It shall comply with the provisions defined in table 4.3.2.3-1.

Table 4.3.2.3-1: Definition of the ManoManagedObjectReference data type

| Attribute name | Data type | Cardinality | Description |
|----------------|----------------|-------------|--|
| type | Enum (inlined) | 1 | Indicates the type of managed object. Permitted values: <ul style="list-style-type: none"> • MANO_ENTITY • MANO_SERVICE • MANO_SERVICE_IF • CONSUMED_MANO_IF • MANO_ENTITY_COMPONENT See note. |
| objectId | Identifier | 1 | Identifier of the managed object. <ul style="list-style-type: none"> • If type="MANO_ENTITY", it corresponds to the value of the attribute "id" of the "ManoEntity" representing an NFV-MANO functional entity. • If type="MANO_SERVICE", it corresponds to the value of the attribute "id" of the "ManoEntity" representing the NFV-MANO functional entity that contains the "ManoService" sub-object. • If type="MANO_SERVICE_IF", it corresponds to the value of the attribute "id" of the "ManoServiceInterface" representing the NFV-MANO functional entity that contains the "ManoServiceInterface" sub-object. • If type="CONSUMED_MANO_IF", the value corresponds to the value of the attribute "id" of the "ConsumedManoInterfaceInfo" representing a consumed NFV-MANO service interface from a peer functional entity. • If type="MANO_ENTITY_COMPONENT", the value corresponds to the value of the attribute "id" of the "ManoEntity" representing the NFV-MANO functional entity that contains the "ManoEntityComponent" sub-object. See note. |

| Attribute name | Data type | Cardinality | Description |
|---|------------------------|-------------|---|
| subObjectId | IdentifierInManoEntity | 0..1 | <p>Identifier of the managed sub-object. It shall be present if type equals to "MANO_SERVICE" or "MANO_SERVICE_IF" or "MANO_ENTITY_COMPONENT".</p> <ul style="list-style-type: none"> If type="MANO_SERVICE", it corresponds to the value of the attribute "id" of the "ManoService" representing an individual NFV-MANO service. If type="MANO_SERVICE_IF", it corresponds to the value of the attribute "id" of the "ManoServiceInterface" representing an individual NFV-MANO service interface. If type="MANO_ENTITY_COMPONENT", it corresponds to the value of the attribute "id" of the "ManoEntityComponent" representing an NFV-MANO functional entity component. <p>See note.</p> |
| <p>NOTE: The "MANO_ENTITY_COMPONENT" is only applicable if attribute "manoEntityComponents" in "ManoEntity" is supported by the API producer.</p> | | | |

4.3.3 Simple data types and enumerations

4.3.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in multiple interfaces.

4.3.3.2 Simple data types

Table 4.3.3.2-1 defines simple data types for reference from data type definitions in the present document. In addition, the simple data type definitions in clause 7.2.2 of ETSI GS NFV-SOL 013 [4] shall apply.

Table 4.3.3.2-1: Simple data types

| Type name | Description |
|------------------------|--|
| IdentifierInManoEntity | An identifier that is unique for the respective type within an NFV-MANO functional entity, but that need not be globally unique. Representation: string of variable length. |
| IdentifierLocal | An identifier that is unique within a limited local scope other than above listed identifiers, such as within a complex data structure or within a request-response pair. Representation: string of variable length. |

4.3.3.3 Enumerations

The enumerations defined in clause 7.2.3 of ETSI GS NFV-SOL 013 [4] shall apply to be available for referencing from data type definitions in the present document.

4.4 HTTP conditional requests

Conditional requests are HTTP (POST, PUT, PATCH and DELETE) requests that include one or more header fields indicating a precondition to be tested before applying the method semantics to the target resource. They are supported by metainformation about the resource that was provided in earlier HTTP responses. The set of HTTP header fields to compose a conditional request allowed in the present version of the present document is defined in clause 4.2 of ETSI GS NFV-SOL 013 [4] with the following provisions applicable to the HTTP requests and responses.

POST: For resources that also support the PUT or PATCH method, the API producer should provide the "ETag" and the "Last-Modified" HTTP headers in the POST response when the HTTP response codes are "200 OK", "201 Created" or "204 No Content".

- GET:** For resources that also support the PUT or PATCH method, the API producer should provide the "ETag" and the "Last-Modified" HTTP headers in the GET response when the response code is "200 OK".
- PATCH:** The API producer should provide the "ETag" and the "Last-Modified" HTTP headers in the PATCH response when the response code are "200 OK" or "204 No Content". In case the related "Last-Modified" or "ETag" headers have been received in previous responses related to the target resource, the API consumer should provide the "If-Unmodified-Since" or the "If-Match" header fields as conditions (see sections 13.1.1 and 13.1.4 of IETF RFC 9110 [15]) in order to prevent conflicts with other changes to the resource.
- When receiving the request, the API producer shall test if there is an "If-Unmodified-Since" or "If-Match" header included. If such header is included, the following applies:
- If the API producer supports providing "ETag" and the "Last-Modified" header in HTTP responses, it shall further process the request according to sections 13.1.1, 13.1.4 and 15.5.13 of IETF RFC 9110 [15]. This includes to check if there is a mismatch between the content of that header and the last modification of the target resource and to return the HTTP response code "412 Precondition failed" in such a case, indicating that the resource was modified by another entity since the API consumer has obtained the representation of the resource.
- If the API producer does not support providing the "ETag" and the "Last-Modified" header in HTTP responses, it shall return the HTTP response code "412 Precondition failed".
- PUT:** The same provisions as for PATCH apply.
- DELETE:** The API producer shall not provide the "ETag" and the "Last-Modified" HTTP headers in the DELETE response as these headers are not applicable when the resource has ceased to exist.

5 NFV-MANO Configuration and Information Management interface

5.1 Description

This interface allows a consumer to configure the producer NFV-MANO functional entity. The interface also allows the consumer to query configuration data and other information from the producer NFV-MANO functional entity. In addition, the interface allows the consumer to request changing the state of the NFV-MANO functional entity application and its supported NFV-MANO services. Finally, the interface also allows the consumer to subscribe to notifications regarding changes of configuration data and other information, and changes in the state of the producer NFV-MANO functional entity application and its supported NFV-MANO services.

The NFV-MANO configuration and information management interface provided by an NFV-MANO functional entity supports the following operations:

- Modify Config;
- Query Config Info;
- Subscribe;
- Terminate Subscription;
- Notify;
- Query Subscription Information;
- Change State.

This interface allows API version information retrieval.

5.2 API version

For the NFV-MANO configuration and information management interface as specified in the present document, the MAJOR version field shall be 2, the MINOR version field shall be 13 and the PATCH version field shall be 0 (see clause 9.1 of ETSI GS NFV-SOL 013 [4] for a definition of the version fields). Consequently, the {apiMajorVersion} URI field shall be set to "v2".

5.3 Resource structure and method

All resource URIs of the API shall use the base URI specification defined in clause 4.1 of ETSI GS NFV-SOL 013 [4]. The string "nfvmanocim" shall be used to represent {apiName}. All resource URIs in the clauses below are defined relative to the above base URI.

Figure 5.3-1 shows the overall resource URI structure defined for the NFV-MANO configuration and information management interface.

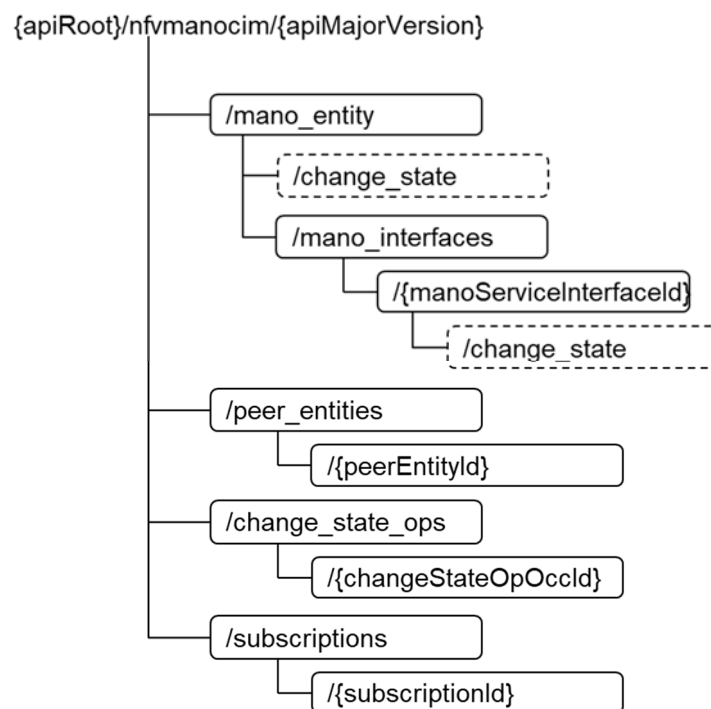


Figure 5.3-1: Resource URI structure of the NFV-MANO configuration and information management interface

Table 5.3-1 lists the individual resources defined, and the applicable HTTP methods.

The NFV-MANO functional entity shall support responding to requests for all HTTP methods on the resources in table 5.3-1 that are marked as "M" (mandatory) in the "Cat" column. The NFV-MANO functional entity shall support the "API versions" resources as specified in clause 9.3.2 of ETSI GS NFV-SOL 013 [4].

Table 5.3-1: Resources and methods overview of the NFV-MANO configuration and information management interface

| Resource name | Resource URI | HTTP Method | Cat | Meaning |
|---|--|-------------|----------|---|
| NFV-MANO entity | /mano_entity | GET | M | Read an NFV-MANO entity resource. |
| | | PATCH | M | Modify NFV-MANO functional entity configuration and information. |
| Change NFV-MANO entity state task | /mano_entity/change_state | POST | M | Change the state of the NFV-MANO functional entity application. |
| NFV-MANO service interfaces | /mano_entity/mano_interfaces | GET | M | Query information of multiple NFV-MANO service interfaces of the NFV-MANO functional entity. |
| Individual NFV-MANO service interface | /mano_entity/mano_interfaces/{manoServiceInterfaceId} | GET | M | Read configuration and information of an NFV-MANO service interface. |
| | | PATCH | M | Modify configuration and information of an NFV-MANO service interface. |
| Change interface state task | /mano_entity/mano_interfaces/{manoServiceInterfaceId}/change_state | POST | M | Change the state of the individual NFV-MANO service interface. |
| Peer entities | /peer_entities | POST | M | Create in the producer NFV-MANO functional entity a resource containing configuration and information with regards to a new peer functional entity resource. |
| | | GET | M | Query information and configuration in the producer NFV-MANO functional entity with regards to multiple peer functional entities. |
| Individual peer entity | /peer_entities/{peerEntityId} | GET | M | Read configuration and information in the producer NFV-MANO functional entity with regards to a peer functional entity. |
| | | PATCH | M | Modify configuration and information of the producer NFV-MANO functional entity with regards to a peer functional entity. |
| | | DELETE | M | Delete in the producer NFV-MANO functional entity a resource containing configuration and information with regards to related to an individual peer functional entity resource. |
| Change state operations | /change_state_ops | GET | M | Query multiple change state operation occurrences. |
| Individual change state operation | /change_state_ops/{changeStateOpOcclId} | GET | M | Read an individual change state operation occurrence. |
| Subscriptions | /subscriptions | POST | M | Subscribe to configuration and information change notifications. |
| | | GET | M | Query multiple subscriptions. |
| Individual subscription | /subscriptions/{subscriptionId} | GET | M | Read an individual subscription resource. |
| | | DELETE | M | Terminate a subscription. |
| Notification endpoint | (client-provided) | POST | See note | Notify about configuration, information and state changes. See note. |
| | | GET | See note | Test the notification endpoint. See note. |
| <p>NOTE: The NFV-MANO functional entity shall support invoking the HTTP methods defined for the "Notification endpoint" resource exposed by the consumer. If the consumer supports invoking the POST method on the "Subscriptions" resource towards the NFV-MANO functional entity, it shall also support responding to the HTTP requests defined for the "Notification endpoint" resource.</p> | | | | |

5.4 Sequence diagrams

5.4.1 Flow of the Read Config Info operation

This clause describes the sequence for reading configuration and information about an NFV-MANO functional entity.

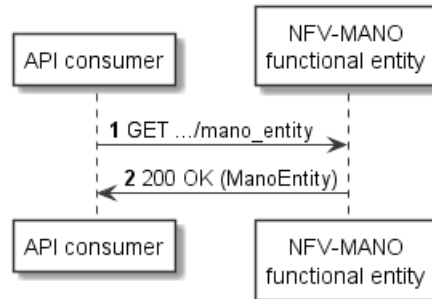


Figure 5.4.1-1: Flow of NFV-MANO entity read

NFV-MANO entity read, as illustrated in figure 5.4.1-1, consists of the following steps:

- 1) The API consumer sends a GET request to the "NFV-MANO entity" resource.
- 2) The NFV-MANO functional entity returns a "200 OK" response to the API consumer and includes one data structure of type "ManoEntity" in the message content.

Error handling: In case of failure, the NFV-MANO functional entity provides in the response appropriate error information.

5.4.2 Flow of the Modify Config operation

This clause describes the sequence for modifying configuration of an NFV-MANO functional entity.

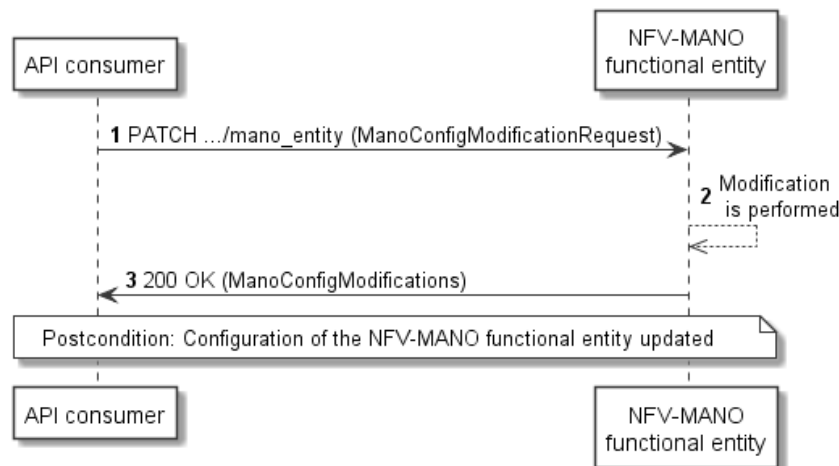


Figure 5.4.2-1: Flow of modification of NFV-MANO entity

NFV-MANO configuration modification, as illustrated in figure 5.4.2-1, consists of the following steps:

- 1) The API consumer sends a PATCH request to the "NFV-MANO entity" resource that is to be re-configured and includes in the message content a data structure of type "ManoConfigModificationRequest".
- 2) The NFV-MANO functional entity performs the modification.
- 3) The NFV-MANO functional entity returns a "200 OK" response and includes in the message content a data structure of type "ManoConfigModifications" to indicate the completion of the operation, and the performed changes.

Postcondition: Upon successful completion, configuration of the NFV-MANO functional entity is updated.

Error handling: If the updating/modification of the NFV-MANO functional entity configuration fails, the NFV-MANO functional entity provides in the response appropriate error information.

5.4.3 Flow of subscriptions management

This clause describes the procedure for creating, querying/reading and terminating subscriptions to notifications related to NFV-MANO configuration and information management.

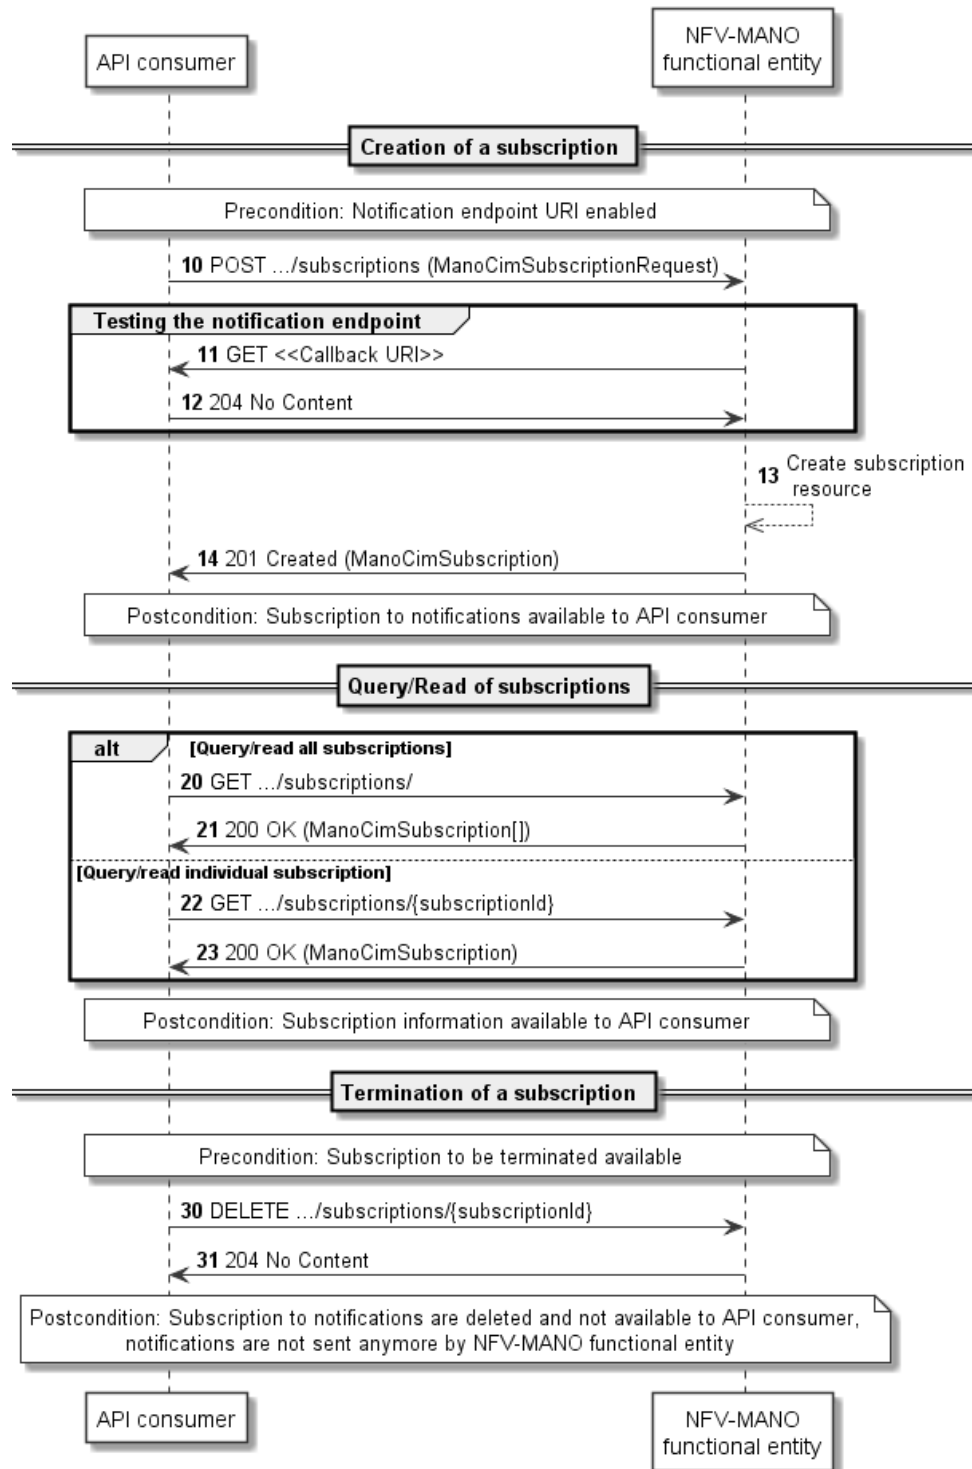


Figure 5.4.3-1: Flow of subscriptions management (create, query/read, terminate)

A) Procedure of creating subscriptions

The procedure of creating subscriptions consists of the following steps, as illustrated in figure 5.4.3-1:

Precondition: The notification endpoint URI is enabled.

- 10) The API consumer sends a POST request to the "Subscriptions" resource including in the message content a data structure of type "CimSubscriptionRequest". The data structure contains filtering criteria and a client side URI to which the NFV-MANO functional entity will subsequently send notifications about events that match the filter.
- 11) To test the notification endpoint that was registered by the API consumer as part of the subscription, the NFV-MANO functional entity sends a GET request to the notification endpoint URI.
- 12) The API consumer returns a "204 No Content" response to indicate success.
- 13) The NFV-MANO functional entity creates a new subscription to notifications related to NFV-MANO configuration and information changes, and a resource that represents this subscription.
- 14) The NFV-MANO functional entity returns a "201 Created" response containing a data structure of type "CimSubscription" representing the subscription resource just created by the NFV-MANO functional entity, and provides the URI of the newly created resource in the "Location" HTTP header.

Postcondition: The subscription to notifications related to NFV-MANO configuration and information changes is available to the API consumer.

Error handling: The NFV-MANO functional entity rejects a subscription if the subscription information is not valid: invalid notification endpoint, subscription information is malformed, etc.

B) Procedure of querying/reading subscriptions

The procedure of querying/reading subscriptions consists of the following steps, as illustrated in figure 5.4.3-1:

- 20) If needed, e.g. to recover from an error situation, the API consumer may query information about its subscriptions by sending a GET request to the resource representing the subscriptions.
- 21) In case of step 20), the NFV-MANO functional entity returns a "200 OK" response that contains zero or more representations of all existing subscriptions that were created by the API consumer.
- 22) If needed, e.g. to recover from an error situation, the API consumer may read information about a particular subscription by sending a GET request to the resource representing that individual subscription.
- 23) In case of step 22), the NFV-MANO functional entity returns a "200 OK" response that contains a representation of that individual subscription.

Postcondition: The subscription information is available to the API consumer.

Error handling: The NFV-MANO functional entity provides in the response message appropriate error information that reports an erroneous query request.

C) Procedure of terminating a subscription

The procedure of terminating a subscription consists of the following steps, as illustrated in figure 5.4.3-1:

Precondition: The subscription to be terminated is available.

- 30) If the API consumer does not need the subscription anymore, the subscription can be terminated by sending a DELETE request to the resource that represents the individual subscription to remove.
- 31) The NFV-MANO functional entity acknowledges the successful termination of the subscription by returning a "204 No Content" response.

Postcondition: The subscription to notifications related to NFV-MANO configuration and information changes is deleted and not available to the API consumer, and notifications associated to this subscription are not sent anymore by the NFV-MANO functional entity.

Error handling: The NFV-MANO functional entity provides in the response message appropriate error information that reports an erroneous termination request: the subscription to terminate is not available, etc.

5.4.4 Flow of sending notifications

This clause describes the procedure for sending notifications related to NFV-MANO configuration and information management.

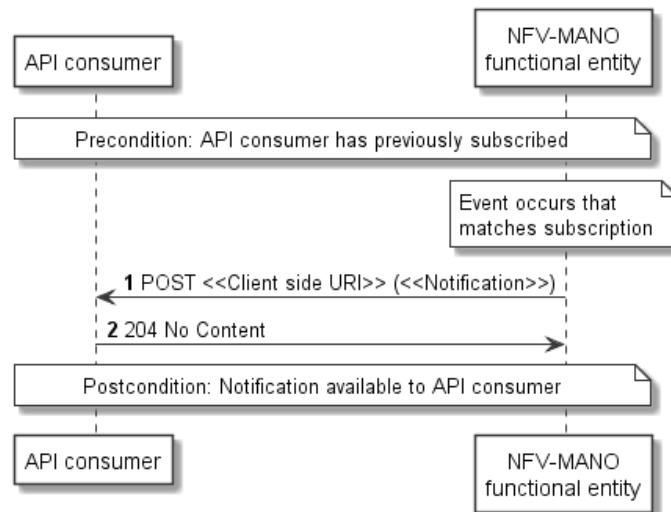


Figure 5.4.4-1: Flow of sending notifications

The procedure of sending notifications consists of the following steps, as illustrated in figure 5.4.4-1:

Precondition: The API consumer has subscribed previously to notifications related to NFV-MANO configuration and information management and the NFV-MANO functional entity has thus a related subscription.

- 1) If an event occurs that matches the filtering criteria which are part of the subscription, the NFV-MANO functional entity generates a notification that includes information about the event, and send it in the body of a POST request to the URI which the API consumer has registered as part of the subscription request.

NOTE: The variable <<Notification>> in the flow is a placeholder for the different types of notifications that can be sent by this API (see clauses 5.6.2.7 and 5.6.2.10).

- 2) The API consumer returns a "204 No Content" response to acknowledge the successful delivery of the notification.

Postcondition: The notification has been made available to the API consumer.

Error handling: If the NFV-MANO functional entity does not receive the "204 No Content" response from the API consumer, it can retry sending the notification.

5.4.5 Flow of changing the state of a managed entity

This clause describes the procedure for changing the operational state of the NFV-MANO functional entity application or NFV-MANO service interface (hereafter referred also as managed entity).

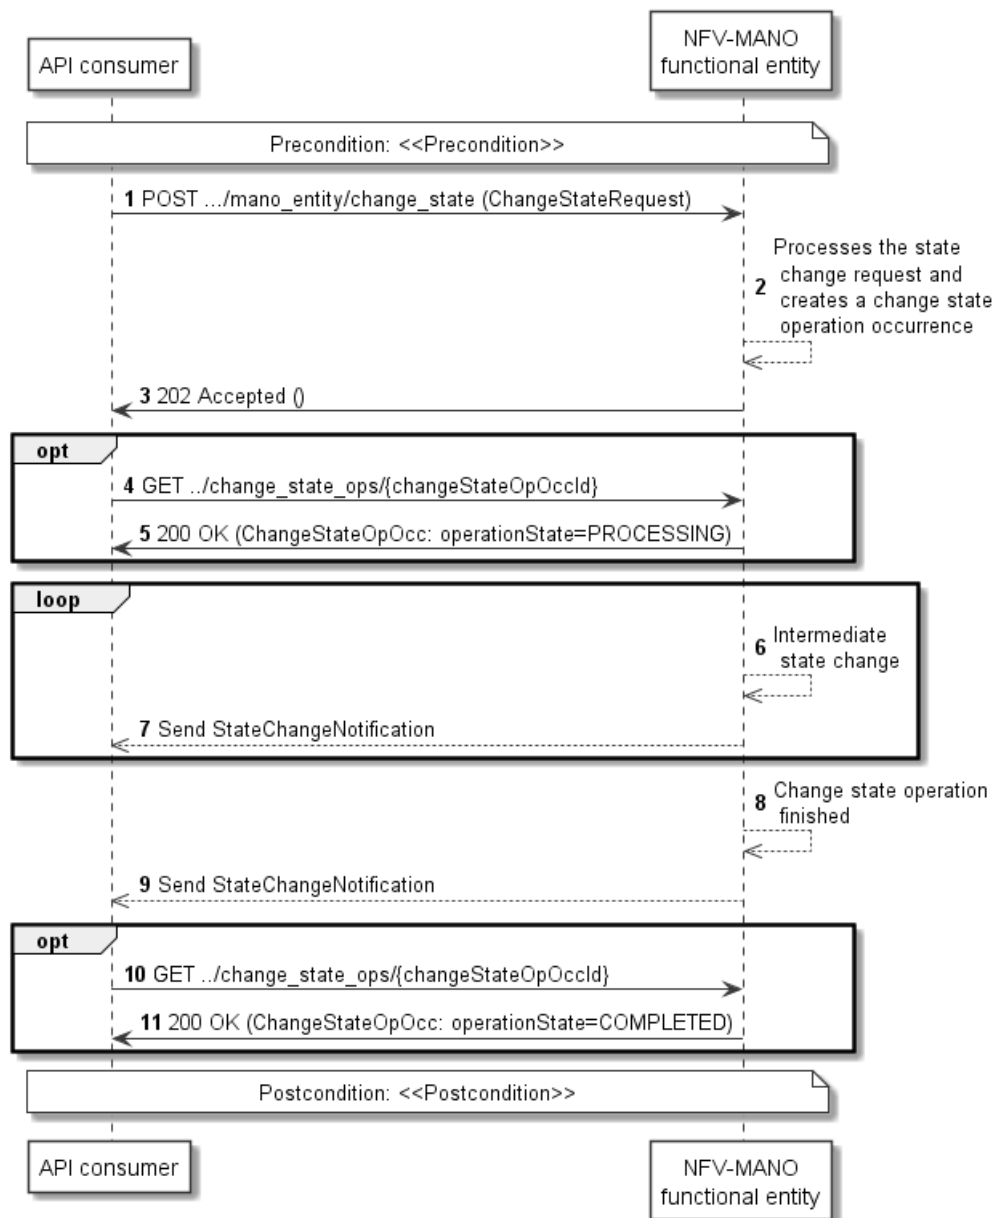


Figure 5.4.5-1: Flow of changing the state of a managed entity

The procedure of changing the state of the managed entity consists of the following steps, as illustrated in figure 5.4.5-1:

Precondition: The precondition depends on the actual state in which the managed entity is. The state transitions of a managed entity are specified in clause 5.7.

- 1) The API consumer sends a POST request to the "Change NFV-MANO entity state task" resource, and includes in the message content a data structure of type "ChangeStateRequest", which includes the specific operational state change.
- 2) The NFV-MANO functional entity processes the state change request and creates a "change state operation occurrence".
- 3) The NFV-MANO functional entity returns a "202 Accepted" response with an empty message content and a "Location" HTTP header that points to the new "change state operation occurrence" resource.
- 4) Optionally, the API consumer can poll the "change state operation occurrence" resource to obtain information about the ongoing change state operation by sending a GET request to the resource that represents the change state operation occurrence.

- 5) In case of step 4), the NFV-MANO functional entity returns to the API consumer information of the operation, such as the operation status, by providing in the message content a data structure of type "ChangeStateOpOcc".
- 6) Depending on the initial state of the managed entity and the state change request, some intermediate state change can take place.
- 7) In case of step 6), the NFV-MANO functional entity sends a "StateChangeNotification" to indicate the intermediate state change, with a "change state operation state equal to PROCESSING".
- 8) The NFV-MANO functional entity has completed the change of state.
- 9) The NFV-MANO functional entity sends a "StateChangeNotification" to indicate the completion of the change state operation with the success "change state operation state equal to COMPLETED".
- 10) Optionally, the API consumer can poll the "change state operation occurrence" resource to obtain information about the ongoing change state operation by sending a GET request to the resource that represents the change state operation occurrence.
- 11) In case of step 10), the NFV-MANO functional entity returns to the API consumer information of the operation, such as the operation status (in this flow, as COMPLETED), by providing in the message content a data structure of type "ChangeStateOpOcc".

Postcondition: The postcondition depends on the actual state in which the managed object is requested to transition to. The state transitions of an NFV-MANO functional entity application are specified in clause 5.7.

Error handling: If the state change of the managed entity fails, error information is provided in the notification message that reports the erroneous completion of the procedure, which is also available in the resource that represents the actual "change state operation occurrence".

5.4.6 Flow of managing information and configuration with regards to peer functional entity

This clause describes the procedures for managing the configuration and information in the producer NFV-MANO functional entity with regards to peer functional entities.

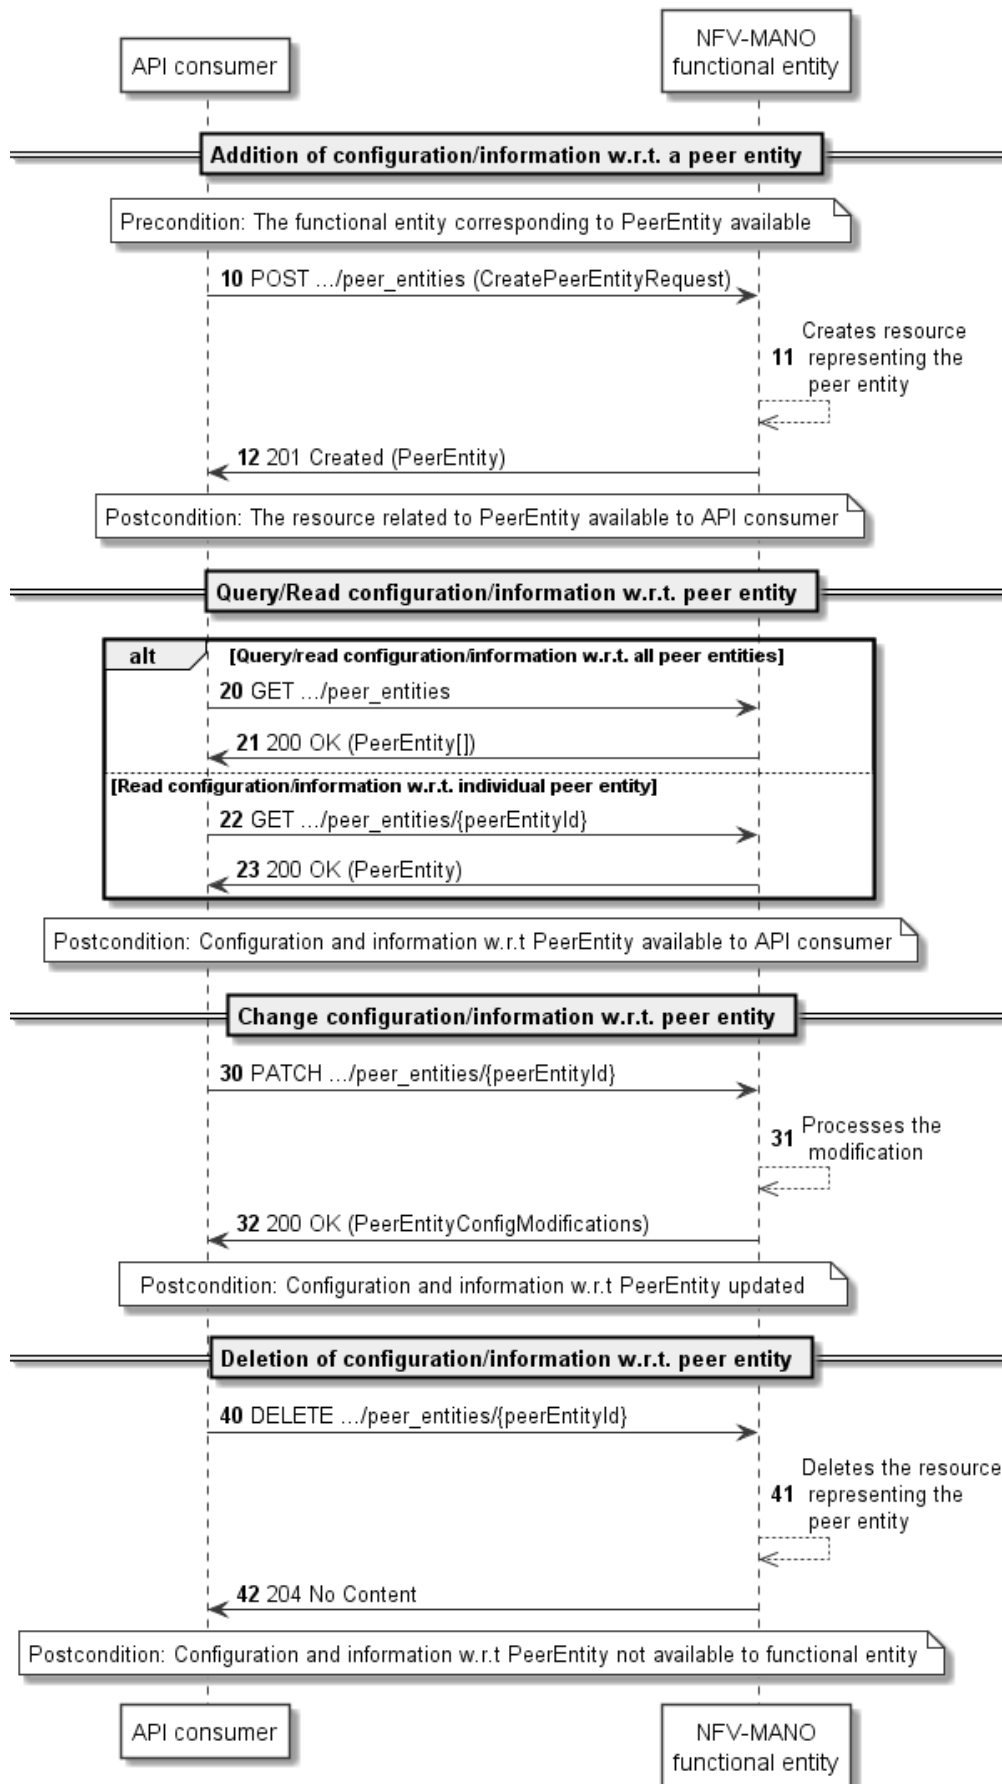


Figure 5.4.6-1: Flow of managing information and configuration with regards to peer functional entity

A) Procedure of adding a configuration/information with regards to a peer functional entity

The procedure of adding new information and configuration on the producer NFV-MANO functional entity with regards to a peer functional entity consists of the following steps, as illustrated in figure 5.4.6-1:

Precondition: The functional entity corresponding to the "peer entity" is available, i.e. it has been deployed and available.

- 10) The API consumer sends a POST request to the producer NFV-MANO functional entity to create a new peer entity resource, and includes in the message content a data structure of type "CreatePeerEntityRequest".
- 11) The NFV-MANO functional entity processes the request and creates a resource representing the "peer functional entity".
- 12) The NFV-MANO functional entity returns a "201 Created" response containing a data structure of type "PeerEntity" representing the resource just created by the NFV-MANO functional entity, and provides the URI of the newly created resource in the "Location" HTTP header.

Postcondition: The resource with the information and configuration related to the peer entity is available to the API consumer.

Error handling: The NFV-MANO functional entity rejects the creation if the information is not valid, such as: a resource corresponding to the peer functional entity already exists. In case of failure, appropriate error information is provided in the response.

B) Procedure of query/read configuration/information with regards to peer entities

The procedure of querying/reading the configuration and information in the producer NFV-MANO functional entity with regards to a peer entity consists of the following steps, as illustrated in figure 5.4.6-1:

- 20) If the API consumer intends to query all resources concerning peer functional entities, it sends a GET request to the "Peer entities" resource.
- 21) In case of step 20), the NFV-MANO functional entity returns a "200 OK" response to the API consumer, and includes zero or more data structures of type "PeerEntity" in the message content.
- 22) If the API consumer intends to read information and configuration with regards to a particular peer functional entity, it sends a GET request to the "Individual peer entity" resource, addressed by the appropriate peer entity identifier in its resource URI.
- 23) In case of step 22), the NFV-MANO functional entity returns a "200 OK" response to the API consumer, and includes one data structure of type "PeerEntity" in the message content.

Postcondition: Upon successful completion, configuration and information with regards to the peer functional entities is available to the API consumer.

Error handling: In case of failure, appropriate error information is provided in the response.

C) Procedure of changing configuration/information with regards to a peer entity

The procedure of modifying the configuration and information in the producer NFV-MANO functional entity with regards to a peer entity consists of the following steps, as illustrated in figure 5.4.6-1:

- 30) The API consumer sends a PATCH request to the "Individual peer entity" resource that is to be operated and includes in the message content a data structure of type "PeerEntityConfigModificationRequest".
- 31) The NFV-MANO functional entity performs the modification.
- 32) The NFV-MANO functional entity returns a "200 OK" response and includes in the message content a data structure of type "PeerEntityConfigModifications" to indicate the completion of the operation, and the performed changes.

Postcondition: Upon successful completion, configuration and information with regards to the peer functional entity is updated.

Error handling: If the update/modification of the configuration and information with regards to the peer functional entity fails, the NFV-MANO functional entity provides in the response appropriate error information.

D) Procedure of deleting configuration/information with regards to a peer entity

The procedure of deleting the configuration and information in the producer NFV-MANO functional entity with regards to a peer entity consists of the following steps, as illustrated in figure 5.4.6-1:

- 40) If the API consumer intends to delete the configuration and information with regards to a particular peer functional entity, it sends a DELETE request to the "Individual peer NFV-MANO entity" resource, addressed by the appropriate individual peer entity identifier in its resource URI.
- 41) The NFV-MANO functional entity deletes the "Individual peer entity" resource.
- 42) The NFV-MANO functional entity returns a "204 No Content" response and an empty message content to the API consumer.

Postcondition: Upon successful completion, configuration and information with regards to the peer functional entity is not available in the producer NFV-MANO functional entity.

Error handling: In case of failure, appropriate error information is provided in the response.

5.5 Resources

5.5.1 Introduction

This clause defines all the resources and methods provided by the NFV-MANO configuration and information management interface.

5.5.2 Resource: API versions

The "API versions" resources as defined in clause 9.3.3 of ETSI GS NFV-SOL 013 [4] are part of the NFV-MANO configuration and information management interface.

5.5.3 Resource: NFV-MANO entity

5.5.3.1 Description

This resource represents an NFV-MANO functional entity. The client can use this resource to read and modify configuration and information data about the NFV-MANO functional entity.

5.5.3.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanocim/{apiMajorVersion}/mano_entity

This resource shall support the resource URI variables defined in table 5.5.3.2-1.

Table 5.5.3.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 5.2. |

5.5.3.3 Resource methods

5.5.3.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.3.3.2 GET

The GET method retrieves information about an NFV-MANO functional entity by reading the NFV-MANO entity resource.

This method shall follow the provisions specified in tables 5.5.3.3.2-1 and 5.5.3.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 5.5.3.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.3.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|---|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | ManoEntity | 1 | 200 OK | <p>Shall be returned when configuration and information about the NFV-MANO functional entity has been read successfully.</p> <p>The response body shall contain a representation of the NFV-MANO functional entity, as defined in clause 5.6.2.2.</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

5.5.3.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.3.3.4 PATCH

The PATCH method modifies the NFV-MANO entity resource.

Changes to the various configuration and information attributes are applied to the NFV-MANO functional entity, and are reflected in the representation of this resource.

This method shall follow the provisions specified in tables 5.5.3.3.4-1 and 5.5.3.3.4-2 for URI query parameters, request and response data structures, and response codes.

If the modification operation has successfully completed, the producer NFV-MANO functional entity shall update the representation of the "NFV-MANO entity" resource to reflect the result of the operation. If the modification operation is not successful, the producer NFV-MANO functional entity shall return to the API consumer information about the error as specified in table 5.5.3.3.4-2.

Table 5.5.3.3.4-1: URI query parameters supported by the PATCH method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.3.3.4-2: Details of the PATCH request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-------------------------------|-------------|---|---|
| | ManoConfigModificationRequest | 1 | Parameters for the NFV-MANO configuration and information modification, as defined in clause 5.6.2.3. The Content-Type header shall be set to "application/merge-patch+json" according to IETF RFC 7396 [3]. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | ManoConfigModifications | 1 | 200 OK | Shall be returned when the modification of configuration on the NFV-MANO functional entity has been accepted and completed. |
| | ProblemDetails | 1 | 409 Conflict | Shall be returned upon the following error: The operation cannot be executed currently, due to a conflict with the state of the "NFV-MANO entity" resource. Typically, this is due to the fact that another configuration and information modification is ongoing. The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error. |
| | ProblemDetails | 0..1 | 412 Precondition failed | Shall be returned upon the following error: A precondition given in an HTTP request header is not fulfilled. Typically, this is due to an ETag mismatch, indicating that the resource was modified by another entity. The response body should contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error. |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

5.5.3.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.4 Resource: Subscriptions

5.5.4.1 Description

This resource represents subscriptions. The client can use this resource to subscribe to notifications related to NFV-MANO configuration and information management, and to query its subscriptions.

5.5.4.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanocim/{apiMajorVersion}/subscriptions

This resource shall support the resource URI variables defined in table 5.5.4.2-1.

Table 5.5.4.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 5.2. |

5.5.4.3 Resource methods

5.5.4.3.1 POST

The POST method creates a new subscription.

This method shall follow the provisions specified in tables 5.5.4.3.1-1 and 5.5.4.3.1-2 for URI query parameters, request and response data structures, and response codes.

As the result of successfully executing this method, a new "Individual subscription" resource as defined in clause 5.5.5 shall have been created. This method shall not trigger any notification.

Creation of two "Individual subscription" resources with the same callbackURI and the same filter can result in performance degradation and will provide duplicates of notifications to the API consumer, and might make senses only in very rare use cases. Consequently, the NFV-MANO functional entity may either allow creating an "Individual subscription" resource if another "Individual subscription" resource with the same filter and callbackUri already exists (in which case it shall return the "201 Created" response code), or may decide to not create a duplicate "Individual subscription" resource (in which case it shall return a "303 See Other" response code referencing the existing "Individual subscription" resource with the same filter and callbackUri).

Table 5.5.4.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.4.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|------------------------|-------------|--|--|
| | CimSubscriptionRequest | 1 | Details of the subscription to be created, as defined in clause 5.6.2.5. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | CimSubscription | 1 | 201 Created | <p>Shall be returned when the subscription has been created successfully.</p> <p>The response body shall contain a representation of the created "Individual subscription" resource.</p> <p>The HTTP response shall include a "Location" HTTP header that points to the created "Individual subscription" resource.</p> |
| | n/a | | 303 See Other | <p>Shall be returned when a subscription with the same callbackURI and the same filter already exists and the policy of NFV-MANO functional entity is to not create redundant subscriptions.</p> <p>The HTTP response shall include a "Location" HTTP header that contains the resource URI of the existing "Individual subscription" resource.</p> <p>The response body shall be empty.</p> |
| | ProblemDetails | 1 | 422 Unprocessable Content | <p>Shall be returned upon the following error: The content type of the message content is supported and the message content of a request contains syntactically correct data but the data cannot be processed.</p> <p>The general cause for this error and its handling is specified in clause 6.4 of ETSI GS NFV-SOL 013 [4], including rules for the presence of the response body.</p> <p>Specifically in case of this resource, the response code 422 shall also be returned if the API producer has tested the Notification endpoint as described in clause 5.5.6.3.2 and the test has failed.</p> <p>In this case, the "detail" attribute in the "ProblemDetails" structure shall convey more information about the error.</p> |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

5.5.4.3.2 GET

The GET method queries the list of active subscriptions of the API consumer that invokes the method. It can be used, e.g. for resynchronization after error situations.

This method shall follow the provisions specified in tables 5.5.4.3.2-1 and 5.5.4.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 5.5.4.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|------------------------|-------------|---|
| filter | 0..1 | <p>Attribute-based filtering expression according to clause 5.2 of ETSI GS NFV-SOL 013 [4].</p> <p>The NFV-MANO functional entity shall support receiving this parameter as part of the URI query string. The API consumer may supply this parameter.</p> <p>All attribute names that appear in the CimSubscription and in data types referenced from it shall be supported by the NFV-MANO functional entity in the filter expression.</p> |
| nextpage_opaque_marker | 0..1 | Marker to obtain the next page of a paged response. Shall be supported by the NFV-MANO functional entity if the entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource. |

Table 5.5.4.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-----------------------|-------------|---|---|
| | n/a | | | |
| Response body | | | Response Codes | Description |
| | CimSubscription | 0..N | 200 OK | <p>Shall be returned when the list of subscriptions has been queried successfully.</p> <p>The response body shall contain in an array the representations of all active subscriptions of the functional block that invokes the method, i.e. zero or more representations of NFV-MANO configuration and information management subscriptions as defined in clause 5.6.2.6.</p> <p>If the "filter" URI parameter was supplied in the request, the data in the response body shall have been transformed according to the rules specified in clause 5.2.2 of ETSI GS NFV-SOL 013 [4].</p> <p>If the NFV-MANO functional entity supports alternative #2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, inclusion of the Link HTTP header in this response shall follow the provisions in clause 5.4.2.3 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute-based filtering expression.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Response too big.</p> <p>If the NFV-MANO functional entity supports alternative #1 (error) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, this error response shall follow the provisions in clause 5.4.2.2 of ETSI GS NFV-SOL 013 [4].</p> |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | <p>In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned.</p> | |

5.5.4.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.4.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.4.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.5 Resource: Individual subscription

5.5.5.1 Description

This resource represents an individual subscription. The client can use this resource to read and to terminate a subscription to notifications related to NFV-MANO configuration and information management.

5.5.5.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanocim/{apiMajorVersion}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 5.5.5.2-1.

Table 5.5.5.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 5.2. |
| subscriptionId | Identifier of this subscription. See note. |
| NOTE: | This identifier can be retrieved from the resource referenced by the "Location" HTTP header in the response to a POST request creating a new "Individual subscription" resource. It can also be retrieved from the "id" attribute in the message content of that response. |

5.5.5.3 Resource methods

5.5.5.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.5.3.2 GET

The GET method retrieves information about a subscription by reading an "Individual subscription" resource.

This method shall follow the provisions specified in tables 5.5.5.3.2-1 and 5.5.5.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 5.5.5.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.5.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|-----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | CimSubscription | 1 | 200 OK | Shall be returned when information about an individual subscription has been read successfully. The response body shall contain a representation of the "Individual subscription" resource. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

5.5.5.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.5.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.5.3.5 DELETE

The DELETE method terminates an individual subscription.

This method shall follow the provisions specified in tables 5.5.5.3.5-1 and 5.5.5.3.5-2 for URI query parameters, request and response data structures, and response codes.

As the result of successfully executing this method, the "Individual subscription" resource shall not exist any longer. This means that no notifications for that subscription shall be sent to the formerly-subscribed API consumer.

NOTE: Due to race conditions, some notifications might still be received by the formerly-subscribed API consumer for a certain time period after the deletion.

Table 5.5.5.3.5-1: URI query parameters supported by the DELETE method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.5.3.5-2: Details of the DELETE request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | 1 | 204 No Content | Shall be returned when the "Individual subscription" resource has been deleted successfully. The response body shall be empty. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

5.5.6 Resource: Notification endpoint

5.5.6.1 Description

This resource represents a notification endpoint. The API producer can use this resource to send notifications related to NFV-MANO configuration and information management to a subscribed API consumer, which has provided the URI of this resource during the subscription process.

5.5.6.2 Resource definition

The resource URI is provided by the client when creating the subscription.

This resource shall support the resource URI variables defined in table 5.5.6.2-1.

Table 5.5.6.2-1: Resource URI variables for this resource

| Name | Definition |
|----------------|------------|
| none supported | |

5.5.6.3 Resource methods

5.5.6.3.1 POST

The POST method delivers a notification from the API producer to an API consumer. The API consumer shall have previously created an "Individual subscription" resource with a matching filter.

This method shall follow the provisions specified in tables 5.5.6.3.1-1 and 5.5.6.3.1-2 for URI query parameters, request and response data structures, and response codes.

Table 5.5.6.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Each notification request body shall include exactly one of the alternatives defined in table 5.5.6.3.1-2.

Table 5.5.6.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|-------------------------|--------------------------------|---|--|--|
| | InformationChangedNotification | 1 | A notification about configuration and information data changes of the NFV-MANO functional entity. | |
| ChangeStateNotification | 1 | A notification about state changes of the NFV-MANO functional entity and its managed objects. | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | Shall be returned when the notification has been delivered successfully. |
| ProblemDetails | See clause 6.4 of [4] | | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

5.5.6.3.2 GET

The GET method allows the API producer to test the notification endpoint that is provided by the API consumer, e.g. during the subscription process.

This method shall follow the provisions specified in tables 5.5.6.3.2-1 and 5.5.6.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 5.5.6.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.6.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | Shall be returned to indicate that the notification endpoint has been tested successfully. The response body shall be empty. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

5.5.6.3.3 PUT

This method is not supported. When this method is requested on this resource, the API consumer shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.6.3.4 PATCH

This method is not supported. When this method is requested on this resource, the API consumer shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.6.3.5 DELETE

This method is not supported. When this method is requested on this resource, the API consumer shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.7 Resource: Change NFV-MANO entity state task

5.5.7.1 Description

This resource represents the "Change State" operation for the NFV-MANO functional entity application. The API consumer can use this resource to request changing the state of the NFV-MANO functional entity application.

5.5.7.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanocim/{apiMajorVersion}/mano_entity/change_state

This resource shall support the resource URI variables defined in table 5.5.7.2-1.

Table 5.5.7.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 5.2. |

5.5.7.3 Resource methods

5.5.7.3.1 POST

The POST method requests to change the state of the NFV-MANO functional entity application.

This method shall follow the provisions specified in tables 5.5.7.3.1-1 and 5.5.7.3.1-2 for URI query parameters, request and response data structures, and response codes.

The steps and conditions that apply as the result of successfully executing this method are specified in clause 5.7.

Table 5.5.7.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.7.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-----------------------|-------------|--|--|
| | ChangeStateRequest | 1 | Parameters for the change state operation, as defined in clause 5.6.2.8. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 202 Accepted | <p>Shall be returned when the request has been accepted for processing.</p> <p>The response body shall be empty.</p> <p>The HTTP response shall include a "Location" HTTP header that contains the URI of the newly-created "Individual change state operation occurrence" resource corresponding to the operation.</p> |
| | ProblemDetails | 1 | 409 Conflict | <p>Shall be returned upon the following error: The operation cannot be executed currently, due to a conflict with the state of the resource.</p> <p>Typically, this is due to the fact that the resource is in an incompatible state, or that another change state operation is ongoing.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute shall convey more information about the error.</p> |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

5.5.7.3.2 GET

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.7.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.7.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.7.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.8 Resource: Change state operation occurrences

5.5.8.1 Description

This resource represents change state operation occurrences. The API consumer can use this resource to query status information about multiple change state operation occurrences.

5.5.8.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanocim/{apiMajorVersion}/change_state_ops

This resource shall support the resource URI variables defined in table 5.5.8.2-1.

Table 5.5.8.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 5.2. |

5.5.8.3 Resource methods

5.5.8.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.8.3.2 GET

The API consumer can use the GET method to query status information about multiple change state operation occurrences.

This method shall follow the provisions specified in tables 5.5.8.3.2-1 and 5.5.8.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 5.5.8.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|------------------------|-------------|--|
| filter | 0..1 | <p>Attribute-based filtering expression according to clause 5.2 of ETSI GS NFV-SOL 013 [4].</p> <p>The NFV-MANO functional entity shall support receiving this parameter as part of the URI query string. The API consumer may supply this parameter.</p> <p>All attribute names that appear in the ChangeStateOpOcc and in data types referenced from it shall be supported by the NFV-MANO functional entity in the filter expression.</p> |
| all_fields | 0..1 | <p>Include all complex attributes in the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4]. The NFV-MANO functional entity shall support this parameter.</p> |
| fields | 0..1 | <p>Complex attributes to be included into the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity should support this parameter.</p> |
| exclude_fields | 0..1 | <p>Complex attributes to be excluded from the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity should support this parameter.</p> |
| exclude_default | 0..1 | <p>Indicates to exclude the following complex attributes from the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity shall support this parameter.</p> <p>The following attributes shall be excluded from the ChangeStateOpOcc structure in the response body if this parameter is provided, or none of the parameters "all_fields", "fields", "exclude_fields", "exclude_default" are provided:</p> <ul style="list-style-type: none"> • operationParams. |
| nextpage_opaque_marker | 0..1 | <p>Marker to obtain the next page of a paged response. Shall be supported by the NFV-MANO functional entity if the entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource.</p> |

Table 5.5.8.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|------------------|-----------------------|-----------------|---|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | ChangeStateOpOcc | 0..N | 200 OK | <p>Shall be returned when status information for zero or more "change state operation occurrences" has been queried successfully.</p> <p>The response body shall contain in an array the status information about zero or more "Individual change state operation occurrences", as defined in clause 5.6.2.9.</p> <p>If the "filter" URI parameter or one of the "all_fields", "fields" (if supported), "exclude_fields" (if supported) or "exclude_default" URI parameters was supplied in the request, the data in the response body shall have been transformed according to the rules specified in clauses 5.2.2 and 5.3.2 of ETSI GS NFV-SOL 013 [4], respectively.</p> <p>If the NFV-MANO functional entity supports alternative #2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, inclusion of the Link HTTP header in this response shall follow the provisions in clause 5.4.2.3 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute-based filtering expression.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute selector.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Response too big.</p> <p>If the NFV-MANO functional entity supports alternative #1 (error) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, this error response shall follow the provisions in clause 5.4.2.2 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | <p>In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned.</p> |

5.5.8.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.8.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.8.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.9 Resource: Individual change state operation occurrence

5.5.9.1 Description

This resource represents a change state operation occurrence. The API consumer can use this resource to read status information about an "Individual change state operation occurrence".

5.5.9.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanocim/{apiMajorVersion}/change_state_ops/{changeStateOpOccId}

This resource shall support the resource URI variables defined in table 5.5.9.2-1.

Table 5.5.9.2-1: Resource URI variables for this resource

| Name | Definition |
|--------------------|---|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 5.2. |
| changeStateOpOccId | Identifier of a change state operation occurrence. See note. |
| NOTE: | This identifier can be retrieved from the resource referenced by the "Location" HTTP header in the response to a POST request triggering a change of state. |

5.5.9.3 Resource methods

5.5.9.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.9.3.2 GET

The API consumer can use the GET method to retrieve status information about a change state operation occurrence by reading an "Individual change state operation occurrence" resource.

This method shall follow the provisions specified in tables 5.5.9.3.2-1 and 5.5.9.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 5.5.9.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.9.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|------------------|-----------------------|----------------|---|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | ChangeStateOpOcc | 1 | 200 OK | <p>Shall be returned when information about an "Individual change state operation occurrence" resource has been read successfully.</p> <p>The response body shall contain status information about a change state operation occurrence, as defined in clause 5.6.2.9.</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

5.5.9.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.9.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.9.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.10 Resource: NFV-MANO service interfaces

5.5.10.1 Description

This resource represents NFV-MANO service interfaces of the producer NFV-MANO functional entity. The client can use this resource to query information about the NFV-MANO service interfaces of the NFV-MANO functional entity.

5.5.10.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanocim/{apiMajorVersion}/mano_entity/mano_interfaces

This resource shall support the resource URI variables defined in table 5.5.10.2-1.

Table 5.5.10.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 5.2. |

5.5.10.3 Resource methods

5.5.10.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.10.3.2 GET

The GET method queries information about multiple NFV-MANO service interfaces of the NFV-MANO functional entity.

This method shall follow the provisions specified in tables 5.5.10.3.2-1 and 5.5.10.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 5.5.10.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|------------------------|-------------|--|
| filter | 0..1 | Attribute-based filtering expression according to clause 5.2 of ETSI GS NFV-SOL 013 [4]. The NFV-MANO functional entity shall support receiving this parameter as part of the URI query string. The API consumer may supply this parameter. All attribute names that appear in the ManoServiceInterface and in data types referenced from it shall be supported by the NFV-MANO functional entity in the filter expression. |
| all_fields | 0..1 | Include all complex attributes in the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4]. The NFV-MANO functional entity shall support this parameter. |
| fields | 0..1 | Complex attributes to be included into the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity should support this parameter. |
| exclude_fields | 0..1 | Complex attributes to be excluded from the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity should support this parameter. |
| exclude_default | 0..1 | Indicates to exclude the following complex attributes from the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity shall support this parameter. The following attributes shall be excluded from the ManoServiceInterface structure in the response body if this parameter is provided, or none of the parameters "all_fields", "fields", "exclude_fields", "exclude_default" are provided: <ul style="list-style-type: none"> • none. |
| nextpage_opaque_marker | 0..1 | Marker to obtain the next page of a paged response. Shall be supported by the NFV-MANO functional entity if the entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource. |

Table 5.5.10.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-----------------------|-------------|--|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | ManoServiceInterface | 0..N | 200 OK | <p>Shall be returned when information about zero or more NFV-MANO service interfaces has been queried successfully.</p> <p>The response body shall contain in an array the representations of zero or more NFV-MANO service interfaces, as defined in clause 5.6.2.11.</p> <p>If the "filter" URI parameter or one of the "all_fields", "fields" (if supported), "exclude_fields" (if supported) or "exclude_default" URI parameters was supplied in the request, the data in the response body shall have been transformed according to the rules specified in clauses 5.2.2 and 5.3.2 of ETSI GS NFV-SOL 013 [4], respectively.</p> <p>If the NFV-MANO functional entity supports alternative #2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, inclusion of the Link HTTP header in this response shall follow the provisions in clause 5.4.2.3 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute-based filtering expression.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute selector.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Response too big.</p> <p>If the NFV-MANO functional entity supports alternative #1 (error) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, this error response shall follow the provisions in clause 5.4.2.2 of ETSI GS NFV-SOL 013 [4].</p> |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

5.5.10.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.10.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.10.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.11 Resource: Individual NFV-MANO service interface

5.5.11.1 Description

This resource represents an individual NFV-MANO service interface of the producer NFV-MANO functional entity. The client can use this resource to modify and read information about the NFV-MANO service interface.

5.5.11.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanocim/{apiMajorVersion}/mano_entity/mano_interfaces/{manoServiceInterfaceId}

This resource shall support the resource URI variables defined in table 5.5.11.2-1.

Table 5.5.11.2-1: Resource URI variables for this resource

| Name | Definition |
|------------------------|---|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 5.2. |
| manoServiceInterfaceId | Identifier of the individual NFV-MANO service interface. See note. |
| NOTE: | This identifier can be retrieved from the "NFV-MANO service interfaces" resource. |

5.5.11.3 Resource methods

5.5.11.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.11.3.2 GET

The GET method retrieves information about an NFV-MANO service interface of the producer NFV-MANO functional entity by reading an "Individual NFV-MANO service interface" resource.

This method shall follow the provisions specified in tables 5.5.11.3.2-1 and 5.5.11.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 5.5.11.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.11.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | ManoServiceInterface | 1 | 200 OK | <p>Shall be returned when information about an individual NFV-MANO service interface has been read successfully.</p> <p>The response body shall contain a representation of the NFV-MANO service interface, as defined in clause 5.6.2.11.</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

5.5.11.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.11.3.4 PATCH

This method is used to modify an "Individual NFV-MANO service interface" resource.

Changes to the configurable parameters of the corresponding NFV-MANO service interface are applied to the information managed by the producer NFV-MANO functional entity and reflected in the representation of this resource.

This method shall follow the provisions specified in tables 5.5.11.3.4-1 and 5.5.11.3.4-2 for URI query parameters, request and response data structures, and response codes.

If the modification operation has successfully completed, the producer NFV-MANO functional entity shall update the representation of the "Individual NFV-MANO service interface" resource to reflect the result of the operation. If the modification operation is not successful, the producer NFV-MANO functional entity shall return to the API consumer information about the error as specified in table 5.5.11.3.4-2.

Table 5.5.11.3.4-1: URI query parameters supported by the PATCH method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.11.3.4-2: Details of the PATCH request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|--|-------------|--|---|
| | ManoServiceInterfaceModification Request | | 1 | Parameters for the modification of configuration parameters of the NFV-MANO service interface, as defined in clause 5.6.2.12. The Content-Type header shall be set to "application/merge-patch+json" according to IETF RFC 7396 [3]. |
| Response body | Data type | Cardinality | Response Codes | Description |
| | ManoServiceInterfaceModifications | 1 | 200 OK | Shall be returned when the request has been accepted and completed. The response body shall contain a representation of the attribute modifications for the "Individual NFV-MANO service interface" resource, as defined in clause 5.6.2.13. |
| | ProblemDetails | 1 | 409 Conflict | Shall be returned upon the following error: The operation cannot be executed currently, due to a conflict with the state of the "Individual NFV-MANO service interface" resource. Typically, this is due to the fact that another operation is ongoing. The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error. |
| | ProblemDetails | 0..1 | 412 Precondition failed | Shall be returned upon the following error: A precondition given in an HTTP request header is not fulfilled. Typically, this is due to an ETag mismatch, indicating that the resource was modified by another entity. The response body should contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error. |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

5.5.11.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.12 Resource: Change interface state task

5.5.12.1 Description

This resource represents the "Change State" operation for an individual NFV-MANO service interface produced by the NFV-MANO functional entity. The API consumer can use this resource to request changing the state of the produced NFV-MANO service interface.

5.5.12.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanocim/{apiMajorVersion}/mano_entity/mano_interfaces/{manoServiceInterfaceId}/change_state

This resource shall support the resource URI variables defined in table 5.5.12.2-1.

Table 5.5.12.2-1: Resource URI variables for this resource

| Name | Definition |
|---|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 5.2. |
| manoServiceInterfaceId | Identifier of the individual NFV-MANO service interface. See note. |
| NOTE: This identifier can be retrieved from the "NFV-MANO service interfaces" resource. | |

5.5.12.3 Resource methods

5.5.12.3.1 POST

The POST method requests to change the state of the NFV-MANO service interface produced by the NFV-MANO functional entity.

This method shall follow the provisions specified in tables 5.5.12.3.1-1 and 5.5.12.3.1-2 for URI query parameters, request and response data structures, and response codes.

The steps and conditions that apply as the result of successfully executing this method are specified in clause 5.7.

Table 5.5.12.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.12.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-----------------------|-------------|--|--|
| | ChangeStateRequest | 1 | Parameters for the change state operation, as defined in clause 5.6.2.8. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 202 Accepted | <p>Shall be returned when the request has been accepted for processing.</p> <p>The response body shall be empty.</p> <p>The HTTP response shall include a "Location" HTTP header that contains the URI of the newly-created "Individual change state operation occurrence" resource corresponding to the operation.</p> |
| | ProblemDetails | 1 | 409 Conflict | <p>Shall be returned upon the following error: The operation cannot be executed currently, due to a conflict with the state of the resource.</p> <p>Typically, this is due to the fact that the resource is in an incompatible state, or that another change state operation is ongoing.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute shall convey more information about the error.</p> |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

5.5.12.3.2 GET

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.12.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.12.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.12.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.13 Resource: Peer entities

5.5.13.1 Description

This resource represents peer functional entities, which can be either NFV-MANO functional entities or other external entities. The client can use this resource to create in the producer NFV-MANO functional entity individual peer entity resources containing configuration and information related to a peer functional entity, and to query in the producer information and configuration about peer entities.

A peer functional entity is a functional entity to which the producer NFV-MANO functional entity (i.e. the one exposing the present API endpoint) establishes a peering relationship to enable the communication and consumption of interfaces. In this sense, the producer NFV-MANO functional entity keeps information and configuration with regards to the peer functional entities via an individual peer entity resource.

5.5.13.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanocim/{apiMajorVersion}/peer_entities

This resource shall support the resource URI variables defined in table 5.5.13.2-1.

Table 5.5.13.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 5.2. |

5.5.13.3 Resource methods

5.5.13.3.1 POST

The POST method creates in the producer NFV-MANO functional entity a new peer entity resource which contains configuration and information with regards to the peer functional entity.

This method shall follow the provisions specified in tables 5.5.13.3.1-1 and 5.5.13.3.1-2 for URI query parameters, request and response data structures, and response codes.

Table 5.5.13.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.13.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|-------------------------|-----------------------|---|--|
| | CreatePeerEntityRequest | 1 | The peer entity creation parameters, as defined in clause 5.6.2.14. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | PeerEntity | 1 | 201 Created | <p>Shall be returned when a new "Individual peer entity" resource has been created successfully.</p> <p>The response body shall contain a representation of the created resource with regards to a peer entity, as defined in clause 5.6.2.15.</p> <p>The HTTP response shall include a "Location" HTTP header that points to the created "Individual peer entity" resource.</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

5.5.13.3.2 GET

The GET method queries information and configuration in the producer NFV-MANO functional entity with regards to multiple peer entities.

This method shall follow the provisions specified in tables 5.5.13.3.2-1 and 5.5.13.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 5.5.13.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|------------------------|-------------|---|
| filter | 0..1 | Attribute-based filtering expression according to clause 5.2 of ETSI GS NFV-SOL 013 [4]. The NFV-MANO functional entity which acts as API producer shall support receiving this parameter as part of the URI query string. The API consumer may supply this parameter. All attribute names that appear in the PeerEntity and in data types referenced from it shall be supported by the NFV-MANO functional entity in the filter expression. |
| all_fields | 0..1 | Include all complex attributes in the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4]. The NFV-MANO functional entity which acts as API producer shall support this parameter. |
| fields | 0..1 | Complex attributes to be included into the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity which acts as API producer should support this parameter. |
| exclude_fields | 0..1 | Complex attributes to be excluded from the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity which acts as API producer should support this parameter. |
| exclude_default | 0..1 | Indicates to exclude the following complex attributes from the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity which acts as API producer shall support this parameter. The following attributes shall be excluded from the PeerEntity structure in the response body if this parameter is provided, or none of the parameters "all_fields", "fields", "exclude_fields", "exclude_default" are provided: <ul style="list-style-type: none"> consumedManoInterfaces. |
| nextpage_opaque_marker | 0..1 | Marker to obtain the next page of a paged response. Shall be supported by the NFV-MANO functional entity which acts as API producer if the entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource. |

Table 5.5.13.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-----------------------|-------------|--|---|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | PeerEntity | 0..N | 200 OK | <p>Shall be returned when information about zero or more peer entities has been queried successfully.</p> <p>The response body shall contain in an array the resource representations of zero or more peer entities, as defined in clause 5.6.2.15.</p> <p>If the "filter" URI parameter or one of the "all_fields", "fields" (if supported), "exclude_fields" (if supported) or "exclude_default" URI parameters was supplied in the request, the data in the response body shall have been transformed according to the rules specified in clauses 5.2.2 and 5.3.2 of ETSI GS NFV-SOL 013 [4], respectively.</p> <p>If the NFV-MANO functional entity supports alternative #2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, inclusion of the Link HTTP header in this response shall follow the provisions in clause 5.4.2.3 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute-based filtering expression.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute selector.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Response too big.</p> <p>If the NFV-MANO functional entity supports alternative #1 (error) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, this error response shall follow the provisions in clause 5.4.2.2 of ETSI GS NFV-SOL 013 [4].</p> |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

5.5.13.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.13.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.13.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.14 Resource: Individual peer entity

5.5.14.1 Description

This resource represents configuration and information in the producer NFV-MANO functional entity with regards to an individual peer functional entity. The client can use this resource to read and modify configuration and information in the producer NFV-MANO functional entity with regards to a peer functional entity.

The client can also use this resource to delete the configuration and information in the producer NFV-MANO functional entity with regards to a peer functional entity. By deleting the corresponding resource in the producer NFV-MANO functional entity representing a peer entity, the configuration and information with regards to such peer functional entity is deleted. Consequently, the peering relationship between the producer NFV-MANO functional entity and the peer entity is terminated, i.e. the producer NFV-MANO functional entity does not have the necessary information to communicate/interact with the peer entity.

5.5.14.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanocim/{apiMajorVersion}/peer_entities/{peerEntityId}

This resource shall support the resource URI variables defined in table 5.5.14.2-1.

Table 5.5.14.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|---|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 5.2. |
| peerEntityId | Identifier of the peer functional entity. See note. |
| NOTE: | This identifier can be retrieved from the resource referenced by the "Location" HTTP header in the response to a POST request creating a new "Individual peer entity" resource. It can also be retrieved from the "id" attribute in the message content of that response. |

5.5.14.3 Resource methods

5.5.14.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.14.3.2 GET

The GET method retrieves information and configuration hold in the producer NFV-MANO functional entity with regards to a peer entity by reading an individual peer entity resource.

This method shall follow the provisions specified in tables 5.5.14.3.2-1 and 5.5.14.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 5.5.14.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.14.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | PeerEntity | 1 | 200 OK | Shall be returned when information about an individual peer functional entity has been read successfully. The response body shall contain a resource representation of the peer functional entity, as defined in clause 5.6.2.15. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

5.5.14.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

5.5.14.3.4 PATCH

This method modifies configuration and information of the producer NFV-MANO functional entity with regards to a peer functional entity by updating the corresponding "Individual peer entity" resource.

Changes to the configurable parameters of the corresponding peer entity are applied to the information managed by the producer NFV-MANO functional entity and reflected in the representation of this resource.

This method shall follow the provisions specified in tables 5.5.14.3.4-1 and 5.5.14.3.4-2 for URI query parameters, request and response data structures, and response codes.

If the modification operation has successfully completed, the producer NFV-MANO functional entity shall update the representation of the "Individual peer entity" resource to reflect the result of the operation. If the modification operation is not successful, the producer NFV-MANO functional entity shall return to the API consumer information about the error as specified in table 5.5.14.3.4-2.

Table 5.5.14.3.4-1: URI query parameters supported by the PATCH method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.14.3.4-2: Details of the PATCH request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-------------------------------------|-------------|---|--|
| | PeerEntityConfigModificationRequest | 1 | Parameters for the modification of configuration parameters of the peer functional entity, as defined in clause 5.6.2.16. The Content-Type header shall be set to "application/merge-patch+json" according to IETF RFC 7396 [3]. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | PeerEntityConfigModifications | 1 | 200 OK | Shall be returned when the request has been accepted and completed. The response body shall contain a representation of the attribute modifications for the "Individual peer entity" resource, as defined in clause 5.6.2.17. |
| | ProblemDetails | 1 | 409 Conflict | Shall be returned upon the following error: The operation cannot be executed currently, due to a conflict with the state of the "Individual peer entity" resource. Typically, this is due to the fact that another operation is ongoing. The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error. |
| | ProblemDetails | 0..1 | 412 Precondition failed | Shall be returned upon the following error: A precondition given in an HTTP request header is not fulfilled. Typically, this is due to an ETag mismatch, indicating that the resource was modified by another entity. The response body should contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error. |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

5.5.14.3.5 DELETE

This method deletes an individual peer entity resource. By deleting such a resource in the producer NFV-MANO functional entity representing a peer NFV-MANO entity, the configuration and information with regards to such peer entity is deleted. Consequently, the peering relationship between the producer NFV-MANO functional entity and the peer entity is terminated, i.e. the producer NFV-MANO functional entity does not have the necessary information to communicate/interact with the peer entity.

This method shall follow the provisions specified in tables 5.5.14.3.5-1 and 5.5.14.3.5-2 for URI query parameters, request and response data structures, and response codes.

As a result of successfully executing this method, the "Individual peer entity" resource shall not exist any longer.

Table 5.5.14.3.5-1: URI query parameters supported by the DELETE method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 5.5.14.3.5-2: Details of the DELETE request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-----------------------|-------------|--|---|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | <p>Shall be returned when the "Individual peer entity" resource has been deleted successfully.</p> <p>The response body shall be empty.</p> |
| | ProblemDetails | 1 | 409 Conflict | <p>Shall be returned upon the following error: The operation cannot be executed currently, due to a conflict with the state of the peer entity resource.</p> <p>Typically, this is due to the fact that another operation is ongoing.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute shall convey more information about the error.</p> |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

5.6 Data model

5.6.1 Introduction

This clause defines the request and response data structures of the NFV-MANO configuration and information management interface. If a request or response contains attributes not defined in the present document, a receiving functional block that does not understand these attributes shall not treat their presence as an error, and may choose to ignore them.

5.6.2 Resource and notification data types

5.6.2.1 Introduction

This clause defines the data structures to be used in resource representations and notifications.

5.6.2.2 Type: ManoEntity

This type represents an NFV-MANO functional entity. It shall comply with the provisions defined in table 5.6.2.2-1.

NOTE: As of the current release of the present document the Certificate Management Function (CMF) is out of scope of ETSI GS NFV 006 [i.3] however it is included in the present document with the rest of NFV-MANO interoperability for the purpose of discovery only.

Table 5.6.2.2-1: Definition of the ManoEntity data type

| Attribute name | Data type | Cardinality | Description |
|------------------------|-----------------------------|-------------|--|
| id | Identifier | 1 | Identifier of the NFV-MANO functional entity. The identifier shall be set during the initial deployment of the NFV-MANO functional entity and its value allocated based on network operator policies. The value of this identifier shall be unique at least in the scope of the NFV-MANO deployment. |
| type | ManoEntityEnumType | 1 | Type of NFV-MANO functional entity. |
| name | String | 1 | Human-readable name of the NFV-MANO functional entity. This attribute can be modified with the PATCH method. |
| description | String | 1 | Human-readable description of the NFV-MANO functional entity. This attribute can be modified with the PATCH method. |
| provider | String | 1 | Information about the provider of the NFV-MANO functional entity. It typically includes the name of the provider. |
| softwareVersion | Version | 1 | The version of the software of the NFV-MANO functional entity. |
| softwareInfo | KeyValuePairs | 0..1 | Additional information about the software used to realize the NFV-MANO functional entity. For instance, the attribute can provide information about sourced software and corresponding release(s) used to build the entity's software. |
| manoEntityComponents | ManoEntityComponent | 0..N | The deployed NFV-MANO functional entity components which realize the NFV-MANO functional entity. See note 5. |
| manoServices | ManoService | 1..N | Information about the NFV-MANO services provided by the NFV-MANO functional entity. |
| manoConfigurableParams | ManoConfigurableParams | 1 | Information and current values of the configurable parameters. This attribute can be modified with the PATCH method. |
| manoApplicationState | Structure (inlined) | 1 | Information and current values of the NFV-MANO functional entity's application state. |
| >operationalState | OperationalStateEnumType | 1 | The operational state of the NFV-MANO functional entity application. |
| >administrativeState | AdministrativeStateEnumType | 1 | The administrative state of the NFV-MANO functional entity application. |
| >usageState | UsageStateEnumType | 1 | The usage state of the NFV-MANO functional entity application. |
| nfvoSpecificInfo | NfvoSpecificInfo | 0..1 | The information specific to an NFVO entity. See notes 1 and 4. |
| vnfmSpecificInfo | VnfmSpecificInfo | 0..1 | The information specific to a VNFM entity. See notes 2 and 4. |
| vimSpecificInfo | VimSpecificInfo | 0..1 | The information specific to a VIM entity. See notes 3 and 4. |
| wimSpecificInfo | WimSpecificInfo | 0..1 | The information specific to a WIM entity. See notes 4 and 6. |
| cismSpecificInfo | CismSpecificInfo | 0..1 | The information specific to a CISM entity. See notes 4 and 7. |

| Attribute name | Data type | Cardinality | Description |
|--|---------------------|-------------|--|
| cirSpecificInfo | CirSpecificInfo | 0..1 | The information specific to a CIR entity. See notes 4 and 8. |
| ccmSpecificInfo | CcmSpecificInfo | 0..1 | The information specific to a CCM entity. See notes 4 and 9. |
| mdafSpecificInfo | MdafSpecificInfo | 0..1 | The information specific to a MDAF entity. See notes 4 and 10. |
| cmfSpecificInfo | CmfSpecificInfo | 0..1 | The information specific to an CMF entity. See notes 4 and 11. |
| _links | Structure (inlined) | 1 | Links to resources related to this resource. |
| >self | Link | 1 | URI of this resource. |
| >manoServiceInterfaces | Link | 1 | Link to the "NFV-MANO service interfaces" resource. |
| >peerEntities | Link | 1 | Link to "Peer entities" resource. |
| >changeState | Link | 1 | Link to the "Change state" task resource. |
| >changeStateOpOccs | Link | 1 | Link to the "Change state operation occurrences" resource. |
| <p>NOTE 1: It shall be present when "type" attribute is "NFVO", and it shall be absent in any other case.</p> <p>NOTE 2: It shall be present when "type" attribute is "VNFM", and it shall be absent in any other case.</p> <p>NOTE 3: It shall be present when "type" attribute is "VIM", and it shall be absent in any other case.</p> <p>NOTE 4: The information about the NFV-MANO services offered by a specific type of NFV-MANO functional entity is specified by the manoServices attribute.</p> <p>NOTE 5: It is optional for the API producer to support the "manoEntityComponents" attribute.</p> <p>NOTE 6: It shall be present when "type" attribute is "WIM", and it shall be absent in any other case.</p> <p>NOTE 7: It shall be present when "type" attribute is "CISM", and it shall be absent in any other case.</p> <p>NOTE 8: It shall be present when "type" attribute is "CIR", and it shall be absent in any other case.</p> <p>NOTE 9: It shall be present when "type" attribute is "CCM", and it shall be absent in any other case.</p> <p>NOTE 10: It shall be present when "type" attribute is "MDAF", and it shall be absent in any other case.</p> <p>NOTE 11: It shall be present when "type" attribute is "CMF", and it shall be absent in any other case.</p> | | | |

5.6.2.3 Type: ManoConfigModificationRequest

This type represents attribute modifications for configuration parameters of an NFV-MANO functional entity. It shall comply with the provisions defined in table 5.6.2.3-1.

Table 5.6.2.3-1: Definition of the ManoConfigModificationRequest data type

| Attribute name | Data type | Cardinality | Description |
|--|------------------------|-------------|---|
| name | String | 0..1 | New value of the "name" attribute in "ManoEntity". |
| description | String | 0..1 | New value of the "description" attribute in "ManoEntity". |
| clockSyncs | map(ClockSynclInfo) | 0..N | Modifications of the "clockSyncs" attribute in the "ManoEntityConfigurableParams". If present, these modifications shall be applied according to the rules of JSON Merge PATCH (see IETF RFC 7396 [3]). |
| defaultLogCompileBySizeValue | UnsignedInt | 0..1 | New value of the "defaultLogCompileBySizeValue" attribute in the "ManoEntityConfigurableParams". |
| defaultLogCompileByTimerValue | UnsignedInt | 0..1 | New value of the "defaultLogCompileByTimerValue" attribute in the "ManoEntityConfigurableParams". |
| manoServiceModifications | Structure (inlined) | 0..N | New content of certain entries in the "manoServices" attribute array in the "ManoEntity", as defined below this table. |
| >id | IdentifierInManoEntity | 1 | Identifier of the NFV-MANO service to modify. |
| >name | String | 0..1 | New value for the "name" attribute in the "ManoService". See note. |
| >description | String | 0..1 | New value for the "description" attribute in the "ManoService". See note. |
| <p>NOTE: At least one of these attributes shall be provided if requesting a modification of the NFV-MANO service identified by "id".</p> | | | |

The following provisions shall apply when modifying an attribute that is an array of structured "manoServiceModifications".

Assumptions:

- A) "oldList" is the array to be modified, "newList" is the array that contains the changes.
- B) "oldEntry" is an entry in "oldList" and "newEntry" is an entry in "newList".
- C) A "newEntry" has a "corresponding entry" if there exists an "oldEntry" that has the same content of "id" attribute as the "newEntry".
- D) In any array of objects, the content of "id" is unique (i.e. there are no two entries with the same content of "id").

Provisions:

- 1) For each "newEntry" in "newList" that has a corresponding "oldEntry" in "oldList", the values of the sub-attributes of "oldEntry" shall be replaced by the value of the sub-attributes in the "newEntry".
- 2) If the "newEntry" in "newList" has no corresponding "oldEntry" in "oldList" (i.e. the "id" is not found), the modification operation will fail as a whole and an error message shall be raised.

5.6.2.4 Type: ManoConfigModifications

This type represents attribute modifications that were performed on the "NFV-MANO entity" resource of the producer NFV-MANO functional entity. The attributes that can be included consist of those requested to be modified explicitly in the "ManoConfigModificationRequest" data structure. It shall comply with the provisions defined in table 5.6.2.4-1.

Table 5.6.2.4-1: Definition of the ManoConfigModifications data type

| Attribute name | Data type | Cardinality | Description |
|-------------------------------|------------------------|-------------|---|
| name | String | 0..1 | If present, this attribute signals modifications of the "name" attribute in "ManoEntity", as defined in clause 5.6.2.3. |
| description | String | 0..1 | If present, this attribute signals modifications of the "description" attribute in "ManoEntity", as defined in clause 5.6.2.3. |
| clockSyncs | map(ClockSyncInfo) | 0..N | If present, this attribute signals modifications of the "clockSyncs" attribute in "ManoEntityConfigurableParams", as defined in clause 5.6.2.3. |
| defaultLogCompileBySizeValue | UnsignedInt | 0..1 | If present, this attribute signals modifications of the "defaultLogCompileBySizeValue" attribute in the "ManoEntityConfigurableParams". |
| defaultLogCompileByTimerValue | UnsignedInt | 0..1 | If present, this attribute signals modifications of the "defaultLogCompileByTimerValue" attribute in the "ManoEntityConfigurableParams". |
| manoServiceModifications | Structure (inlined) | 0..N | If present, this attribute signals modifications of the "manoServices" attribute array in the "ManoEntity", as defined in clause 5.6.2.3. |
| >id | IdentifierInManoEntity | 1 | Identifier of the NFV-MANO service that has been modified. |
| >name | String | 0..1 | If present, this attribute signals modification of the "name" attribute in the "ManoService". |
| >description | String | 0..1 | If present, this attribute signals modification of the "description" attribute in the "ManoService". |

5.6.2.5 Type: CimSubscriptionRequest

This type represents a subscription request related to notifications about NFV-MANO configuration and information management changes. It shall comply with the provisions defined in table 5.6.2.5-1.

Table 5.6.2.5-1: Definition of the CimSubscriptionRequest data type

| Attribute name | Data type | Cardinality | Description |
|----------------|----------------------------|-------------|--|
| filter | CimNotificationsFilter | 0..1 | Filter settings for this subscription, to define the subset of all notifications this subscription relates to. A particular notification is sent to the subscriber if the filter matches, or if there is no filter. |
| callbackUri | Uri | 1 | The URI of the endpoint to send the notification to. |
| authentication | SubscriptionAuthentication | 0..1 | Authentication parameters to configure the use of Authorization when sending notifications corresponding to this subscription, as defined in clause 8.3.4 of ETSI GS NFV-SOL 013 [4]. This attribute shall only be present if the subscriber requires authorization of notifications. |

5.6.2.6 Type: CimSubscription

This type represents a subscription related to notifications about NFV-MANO configuration and information management changes. It shall comply with the provisions defined in table 5.6.2.6-1.

Table 5.6.2.6-1: Definition of the CimSubscription data type

| Attribute name | Data type | Cardinality | Description |
|----------------|------------------------|-------------|---|
| id | Identifier | 1 | Identifier that identifies the subscription. |
| filter | CimNotificationsFilter | 0..1 | Filter settings for this subscription, to define the subset of all notifications this subscription relates to. A particular notification is sent to the subscriber if the filter matches, or if there is no filter. |
| callbackUri | Uri | 1 | The URI of the endpoint to send the notification to. |
| _links | Structure (inlined) | 1 | Links to resources related to this resource. |
| >self | Link | 1 | URI of this resource. |

5.6.2.7 Type: InformationChangedNotification

This type represents a notification that is sent when data about configuration and information of the NFV-MANO functional entity have been changed. It shall comply with the provisions defined in table 5.6.2.7-1.

The notification shall be triggered by the NFV-MANO functional entity when information has been changed.

Table 5.6.2.7-1: Definition of the InformationChangedNotification data type

| Attribute name | Data type | Cardinality | Description |
|------------------------|---------------------|-------------|---|
| id | Identifier | 1 | Identifier of this notification. If a notification is sent multiple times due to multiple subscriptions, the "id" attribute of all these notifications shall have the same value. |
| notificationType | String | 1 | Discriminator for the different notification types. Shall be set to "InformationChangedNotification" for this notification type. |
| subscriptionId | Identifier | 1 | Identifier of the subscription that this notification relates to. |
| timeStamp | DateTime | 1 | Date and time of the generation of the notification. |
| informationChangedTime | DateTime | 1 | Timestamp indicating when the information was changed. |
| manoEntityId | Identifier | 1 | Identifier of the MANO entity of which the information was changed. |
| changedInfo | KeyValuePairs | 1 | Data about the changed configuration and information of the NFV-MANO functional entity. |
| _links | Structure (inlined) | 1 | Links to resources related to this notification. |
| >subscription | NotificationLink | 1 | Link to the related subscription. |
| >objectInstance | NotificationLink | 0..1 | Link to the resource representing the object to which the notified changes applies. Shall be present if the object instance is accessible as a resource. |

5.6.2.8 Type: ChangeStateRequest

This type represents request parameters for changing the state of a managed entity. It shall comply with the provisions defined in table 5.6.2.8-1.

NOTE: The ChangeStateRequest data type can be used for requesting state changes on different types of managed entities, such as the NFV-MANO functional entity application and NFV-MANO service interfaces, as indicated by the supported method request/response of a resource.

Table 5.6.2.8-1: Definition of the ChangeStateRequest data type

| Attribute name | Data type | Cardinality | Description |
|---|-----------------------------------|-------------|--|
| operationalStateChange | Structure (inlined) | 0..1 | A change of operational state shall be present if the state change request refers to the operational state. See note 1. |
| >operationalStateAction | ChangeOperationalStateEnumType | 1 | The desired operation state to change the managed object to. In case of changing the state of an NFV-MANO service interface the value "RESTART" shall not be used. |
| >stopType | StopEnumType | 0..1 | It signals the type of stop. See note 2. |
| >gracefulStopTimeout | Integer | 0..1 | The time interval (in seconds) to wait for the entity to be taken out of service during graceful stop. See note 2. |
| administrativeStateChange | Structure (inlined) | 0..1 | A change of administrative state shall be present if the state change request refers to the administrative state. See note 1. |
| >administrativeStateAction | ChangeAdministrativeStateEnumType | 1 | The desired administrative state to change the managed object to. |
| NOTE 1: In the present document version, a request shall only include an operational state change (attribute "operationalStateChange") or an administrative state change request (attribute "administrativeStateChange"), but not both. | | | |
| NOTE 2: The "stopType" shall only be provided when the "operationalStateAction" attribute is equal to "STOP" or "RESTART". The "gracefulStopTimeout" shall be absent when the "stopType" attribute is equal to "FORCEFUL", and may be provided otherwise. | | | |

5.6.2.9 Type: ChangeStateOpOcc

This type represents a Change state operation occurrence. It shall comply with the provisions defined in table 5.6.2.9-1.

Table 5.6.2.9-1: Definition of the ChangeStateOpOcc data type

| Attribute name | Data type | Cardinality | Description |
|----------------------------------|-----------------------------------|-------------|---|
| id | Identifier | 1 | Identifier of this change state operation occurrence. |
| operationState | ChangeStateOpOccStateEnumType | 1 | The state of the "change state operation occurrence". |
| stateEnteredTime | DateTime | 1 | Date-time when the current state was entered. |
| startTime | DateTime | 1 | Date-time of the start of the operation. |
| managedObjectRef | ManoManagedObjectReference | 1 | Reference of the managed object to which the change state operation occurrence relates. The value of the "type" attribute shall be "MANO_ENTITY" or "MANO_SERVICE_IF". |
| changeOperationalStateRequest | ChangeOperationalStateEnumType | 0..1 | The type of the change of operational state that was requested. Shall be present if the change of state operation triggered a change of operational state. |
| changeAdministrativeStateRequest | ChangeAdministrativeStateEnumType | 0..1 | The type of the change of administrative state that was requested. Shall be present if the change of state operation triggered a change of administrative state. |
| operationParams | Object | 0..1 | Input parameters of the change state operation. This attribute shall be formatted according to the request data type of the related change state operation. The following mapping between operationType and the data type of this attribute shall apply: <ul style="list-style-type: none"> CHANGE_STATE: ChangeStateRequest This attribute shall be present if this data type is returned in a response to reading an individual resource, and may be present according to the chosen attribute selector parameter if this data type is returned in a response to a query of a container resource. |

5.6.2.10 Type: ChangeStateNotification

This type represents a Change state operation occurrence. It shall comply with the provisions defined in table 5.6.2.10-1.

Table 5.6.2.10-1: Definition of the ChangeStateNotification data type

| Attribute name | Data type | Cardinality | Description |
|---------------------------|-------------------------------|-------------|---|
| id | Identifier | 1 | Identifier of this notification. If a notification is sent multiple times due to multiple subscriptions, the "id" attribute of all these notifications shall have the same value. |
| notificationType | String | 1 | Discriminator for the different notification types. Shall be set to "ChangeStateNotification" for this notification type. |
| subscriptionId | Identifier | 1 | Identifier of the subscription that this notification relates to. |
| timestamp | DateTime | 1 | Date-time of the generation of the notification. |
| changeStateOpOccId | Identifier | 1 | Identifier of the change state operation occurrence associated to the notification. |
| stateChangedTime | DateTime | 1 | Timestamp indicating when the state on the managed object was changed. |
| changeStateOperationState | ChangeStateOpOccStateEnumType | 1 | The state of the "change state operation occurrence". |
| managedObjectRef | ManoManagedObjectReference | 1 | Reference of the managed object to which the state change notification relates. The value of the "type" attribute shall be "MANO_ENTITY" or "MANO_SERVICE_IF". |
| operationalState | OperationalStateEnumType | 0..1 | New operational state of the managed object. Shall only be present when there is a change in the operational state. |
| administrativeState | AdministrativeStateEnumType | 0..1 | New administrative state of the managed object. Shall only be present when there is a change in the administrative state. |
| _links | Structure (inlined) | 1 | Links to resources related to this notification. |
| >subscription | NotificationLink | 1 | Link to the related subscription. |
| >objectInstance | NotificationLink | 1 | Link to the resource representing the object to which the change state applies. Shall be present if the object instance is accessible as a resource. |
| >changeStateOpOcc | NotificationLink | 1 | Link to the change state operation occurrence that this notification is related to. |

5.6.2.11 Type: ManoServiceInterface

This type represents an individual NFV-MANO service interface produced by an NFV-MANO functional entity. It shall comply with the provisions defined in table 5.6.2.11-1.

Table 5.6.2.11-1: Definition of the ManoServiceInterface data type

| Attribute name | Data type | Cardinality | Description |
|----------------------------|------------------------|-------------|--|
| id | IdentifierInManoEntity | 1 | Identifier of the NFV-MANO functional entity interface. |
| name | String | 1 | Human-readable name of the NFV-MANO functional entity interface. This attribute can be modified with the PATCH method. |
| type | String | 1 | Type of the NFV-MANO service interface produced by the NFV-MANO functional entity. Valid values are defined in clause 5.6.4.3. |
| standardVersion | Version | 1 | Version of the standard the interface is compliant to. See note 1. |
| providerSpecificApiVersion | Version | 1 | Provider-specific software API version. |
| apiVersion | Version | 1 | API version, in compliance with the version identifiers and parameters format specified in clause 9.1 of ETSI GS NFV-SOL 013 [4]. |
| apiEndpoint | Structure (inlined) | 1 | Exposed API endpoint of the interface. |
| >apiRoot | Uri | 0..1 | Indicates the scheme ("http" or "https"), the host name and optional port, and an optional sequence of path segments that together represent a prefix path. Shall be present for ETSI NFV specified RESTful NFV-MANO APIs (see also clause 4.1 of ETSI GS NFV-SOL 013 [4]). May be present otherwise. This attribute can be modified with the PATCH method. |
| >apiName | String | 0..1 | Indicates the interface name in an abbreviated form. Shall be present for ETSI NFV specified RESTful NFV-MANO APIs. The {apiName} of each interface is defined in the standard the interface is compliant to (see also clause 4.1 of ETSI GS NFV-SOL 013 [4]). May be present otherwise. |
| >apiMajorVersion | String | 0..1 | Indicates the current major version of the API. Shall be present for ETSI NFV specified RESTful NFV-MANO APIs. The major version is defined in the standard the interface is compliant to (see also clause 4.1 of ETSI GS NFV-SOL 013 [4]). May be present otherwise. |
| >apiUri | Uri | 1 | URL of the API endpoint. For ETSI NFV specified RESTful NFV-MANO APIs, the following prefix structure is used (see also clause 4.1 of ETSI GS NFV-SOL 013 [4]): {apiRoot}/{apiName}/{apiMajorVersion} For APIs not specified by ETSI NFV as part of the RESTful NFV-MANO APIs, this attribute can be modified with the PATCH method. For RESTful NFV-MANO APIs specified by ETSI NFV, this attribute shall not be modified. Instead, changes are handled indirectly via patching of the "apiRoot" attribute's value. |

| Attribute name | Data type | Cardinality | Description |
|--|------------------------------------|-------------|---|
| maxConcurrentIntOpNumber | Integer | 0..1 | Maximum number of concurrent operation requests supported on this interface. See note 2. |
| supportedOperations | Structure (inlined) | 1..N | Information about supported operations of this interface. |
| >operationName | String | 1 | Name of the operation supported on the interface. |
| >maxConcurrentOpNumber | Integer | 0..1 | Maximum number of concurrent requests supported by the interface operation. See note 2. |
| interfaceState | Structure (inlined) | 1 | State of the NFV-MANO service interface. |
| >operationalState | InterfaceOperationalStateEnum Type | 1 | The operational state of the NFV-MANO service interface. |
| >administrativeState | AdministrativeStateEnumType | 1 | The administrative state of the NFV-MANO service interface. |
| >usageState | UsageStateEnumType | 1 | The usage state of the NFV-MANO service interface. |
| securityInfo | ServerInterfaceSecurityInfo | 0..1 | Security related information. This attribute can be modified with the PATCH method. See note 3. |
| metadata | KeyValuePairs | 0..1 | Additional attributes that provide metadata describing the NFV-MANO service interface. These attributes can be created, modified or removed with the PATCH method. |
| NOTE 1: The information to be provided in this attribute shall relate to the specification and version of the specification. For instance: "ETSI GS NFV-SOL 003 (V2.4.1)". | | | |
| NOTE 2: If this attribute is not present, the value of this parameter is undefined. Overload is handled by the error handling schemes defined by the applicable API specification. | | | |
| NOTE 3: Due to the security sensitive information associated to the attribute, based on access control policies, the API consumer might have read only, write only, read/write, or no access at all to the attribute's value. In case the API consumer is not allowed to read the value of the security sensitive attribute, the attribute shall be omitted when the information is to be provided in a response message, and shall be provided otherwise. In case the API consumer is not allowed to modify the value of the security sensitive attribute, and the modification request includes new attribute values, the whole modification request shall be rejected, and proper error information returned. | | | |

5.6.2.12 Type: ManoServiceInterfaceModificationRequest

This type represents attribute modifications for configuration parameters of an NFV-MANO service interface of the producer NFV-MANO functional entity. It shall comply with the provisions defined in table 5.6.2.12-1.

Table 5.6.2.12-1: Definition of the ManoServiceInterfaceModificationRequest data type

| Attribute name | Data type | Cardinality | Description |
|----------------|-----------------------------|-------------|--|
| name | String | 0..1 | New value of the "name" attribute in "ManoServiceInterface". See note 1. |
| apiRoot | Uri | 0..1 | New value of the "apiRoot" attribute in "ManoServiceInterface". See note 2. |
| apiUri | Uri | 0..1 | New value of the "apiUri" attribute in "ManoServiceInterface". See note 2. Shall not be provided if a change of "apiRoot" is present in the request. |
| securityInfo | ServerInterfaceSecurityInfo | 0..1 | New value of the "securityInfo" attribute in "ManoServiceInterface". See note 3. |

| Attribute name | Data type | Cardinality | Description |
|---|---------------|-------------|---|
| metadata | KeyValuePairs | 0..1 | Modifications of the "metadata" attribute in "ManoServiceInterface". If present, these modifications shall be applied according to the rules of JSON Merge PATCH (see IETF RFC 7396 [3]). |
| NOTE 1: Changing the name does not change the corresponding standardized API name in the resource URI (refer to "{apiName}" defined in clause 4.1 of ETSI GS NFV-SOL 013 [4]). | | | |
| NOTE 2: The change of apiRoot or apiUri on an enabled and in use API may be service disruptive. Also, that change invalidates any related URI that might have been cached at API consumers. | | | |
| NOTE 3: Due to the security sensitive information associated to the attribute, based on access control policies, the API consumer might have read only, write only, read/write, or no access at all to the attribute's value. In case the API consumer is not allowed to modify the value of the security sensitive attribute, and the modification request includes new attribute values, the whole modification request shall be rejected, and proper error information returned. | | | |

5.6.2.13 Type: ManoServiceInterfaceModifications

This type represents attribute modifications that were performed on an "Individual NFV-MANO service interface" resource. The attributes that can be included consist of those requested to be modified explicitly in the "ManoServiceInterfaceModificationRequest" data structure. If applicable, additional attributes of the "ManoServiceInterface" data structure that were modified implicitly shall also be provided. It shall comply with the provisions defined in table 5.6.2.13-1.

Table 5.6.2.13-1: Definition of the ManoServiceInterfaceModifications data type

| Attribute name | Data type | Cardinality | Description |
|---|-----------------------------|-------------|--|
| name | String | 0..1 | If present, this attribute signals modifications of the "name" attribute in "ManoServiceInterface", as defined in clause 5.6.2.11. |
| apiRoot | Uri | 0..1 | If present, this attribute signals modifications of the "apiRoot" attribute in "ManoServiceInterface", as defined in clause 5.6.2.11. |
| apiUri | Uri | 0..1 | If present, this attribute signals modifications of the "apiUri" attribute in "ManoServiceInterface", as defined in clause 5.6.2.11. |
| securityInfo | ServerInterfaceSecurityInfo | 0..1 | If present, this attribute signals modifications of the "securityInfo" attribute in "ManoServiceInterface", as defined in clause 5.6.2.11. See note. |
| metadata | KeyValuePairs | 0..1 | If present, this attribute signals modifications of the "metadata" attribute in "ManoServiceInterface", as defined in clause 5.6.2.11. |
| NOTE: Due to the security sensitive information associated to the attribute, based on access control policies, the API consumer might have read only, write only, read/write, or no access at all to the attribute's value. In case the API consumer is not allowed to read the value of the security sensitive attribute, the attribute shall be omitted when the information is to be provided in a response message. | | | |

5.6.2.14 Type: CreatePeerEntityRequest

This type represents request parameters for the creation of a new peer entity resource. It shall comply with the provisions defined in table 5.6.2.14-1.

Table 5.6.2.14-1: Definition of the CreatePeerEntityRequest data type

| Attribute name | Data type | Cardinality | Description |
|------------------------|---|-------------|--|
| peerEntityId | Identifier | 1 | Identifier of the peer functional entity. See note. |
| name | String | 1 | Human-readable name of the peer functional entity. |
| type | PeerEntityEnumType | 1 | Type of the peer functional entity. |
| description | String | 0..1 | Human-readable description of the peer functional entity. |
| consumedManoInterfaces | map(ConsumedManoInterfaceInfo) | 0..N | Initial information of the interface consumed by the NFV-MANO functional entity from the peer functional entity. |
| peerEntityState | Structure (inlined) | 0..1 | Current values of the state of the peer functional entity. |
| >operationalState | OperationalStateEnumType | 1 | The operation state of the peer functional entity's application. |
| >administrativeState | AdministrativeStateEnumType | 1 | The administrative state of the peer functional entity's application. |
| NOTE: | The value of the "peerEntityId" attribute is the same as the value of the "id" attribute in the "ManoEntity" of the corresponding NFV-MANO functional entity that acts as peer entity, and shall follow the uniqueness requirements set out in clause 5.6.2.2 for the "id" attribute. | | |

5.6.2.15 Type: PeerEntity

This type represents an individual peer entity. It shall comply with the provisions defined in table 5.6.2.15-1.

NOTE: ETSI GS NFV-IFA 031 [1] defines an additional attribute named "apiDiscoveryEndpoint" in the PeerManoEntity. The modelling of this attribute is not specified in the present document version.

Table 5.6.2.15-1: Definition of the PeerEntity data type

| Attribute name | Data type | Cardinality | Description |
|------------------------|--------------------------------|-------------|--|
| id | Identifier | 1 | Identifier of the resource representing the peer functional entity. This identifier is allocated by the producer NFV-MANO functional entity. |
| peerEntityId | Identifier | 1 | Identifier of the peer functional entity. See note 1. |
| name | String | 1 | Human-readable name of the peer functional entity. This attribute can be modified with the PATCH method. |
| type | PeerEntityEnumType | 1 | Type of the peer functional entity. |
| description | String | 0..1 | Human-readable description of the peer functional entity. This attribute can be modified with the PATCH method. |
| consumedManoInterfaces | map(ConsumedManoInterfaceInfo) | 0..N | Information of the interface consumed by the NFV-MANO functional entity from the peer functional entity. This attribute can be modified with the PATCH method. The keys of the map, each of which identifies information about a particular consumed NFV-MANO interface, are managed by the API consumer and referenced from other data structures via the "consumedManoInterfaceIds" attribute. |

| Attribute name | Data type | Cardinality | Description |
|--|-----------------------------|-------------|---|
| vimConnectionInfos | map(VimConnectionInfo) | 0..N | <p>Map of VIM connection information. The VimConnectionInfo is specified in clause 4.4.1.6 of ETSI GS NFV-SOL 003 [10].</p> <p>This attribute can be modified with the PATCH method.</p> <p>May be present only if the "type" attribute in the "PeerEntity" is either a "VIM", a "CISM" or a "CIR", and the NFV-MANO entity being configured is a "VNFM" or "NFVO" as indicated by the "type" attribute in the "ManoEntity".</p> <p>In case it is present, the value of the "vimId" in the "VimConnectionInfo" shall be equal to the value of "peerEntityId". In addition, the content of "interfaceInfo", "accessInfo" and "extra" (if applicable) of the "VimConnectionInfo" shall be provided by means in scope of the present document.</p> |
| vnfmConfiguredVimConnectionInfos | Identifier | 0..N | <p>List of VIM connection information identifiers that identify the set of VIMs and associated VIM connection information that have been configured into the VNFM whose identifier is equal to the "peerEntityId". See note 2.</p> <p>Only applicable if the "type" attribute in the "ManoEntity" is "NFVO" and the "type" attribute in the "PeerEntity" is a "VNFM".</p> |
| peerEntityState | Structure (inlined) | 1 | State of the peer functional entity as provided by the API consumer when creating the resource or when updating it with the PATCH method. |
| >operationalState | OperationalStateEnumType | 1 | The operational state of the peer functional entity's application. |
| >administrativeState | AdministrativeStateEnumType | 1 | The administrative state of the peer functional entity's application. |
| <p>NOTE 1: The value of the "peerEntityId" attribute is the same as the value of the "id" attribute in the "ManoEntity" of the corresponding NFV-MANO functional entity that acts as peer entity, and shall follow the uniqueness requirements set out in clause 5.6.2.2 for the "id" attribute.</p> <p>NOTE 2: With this information, the NFVO has available information about the set of VIMs and associated VIM connection information that have been configured into the VNFM.</p> | | | |

5.6.2.16 Type: PeerEntityConfigModificationRequest

This type represents attribute modifications for configuration parameters of a peer entity. It shall comply with the provisions defined in table 5.6.2.16-1.

Table 5.6.2.16-1: Definition of the PeerEntityConfigModificationRequest data type

| Attribute name | Data type | Cardinality | Description |
|---|--------------------------------|-------------|--|
| name | String | 0..1 | New value of the "name" attribute in "PeerEntity". |
| description | String | 0..1 | New value of the "description" attribute in "PeerEntity", or "null" to remove the attribute. |
| consumedManoInterfaces | map(ConsumedManoInterfaceInfo) | 0..N | Modification of the "consumedManoInterfaces" attribute in the "PeerEntity". If present, these modifications shall be applied according to the rules of JSON Merge PATCH (see IETF RFC 7396 [3]). See note. |
| vimConnectionInfos | map(VimConnectionInfo) | 0..N | Modification of the "vimConnectionInfos" attribute in the "PeerEntity". If present, these modifications shall be applied according to the rules of JSON Merge PATCH (see IETF RFC 7396 [3]). See note. |
| operationalState | OperationalStateEnumType | 0..1 | New content of the "operationalState" attribute in the "peerEntityState" structure in the "PeerEntity". |
| administrativeState | AdministrativeStateEnumType | 0..1 | New content of the "administrativeState" attribute in the "peerEntityState" structure in the "PeerEntity". |
| NOTE: Due to the security sensitive information contained within the attribute (refer to "securityInfo" within the "ConsumedManoInterfaceInfo" and "accessInfo" within the "VimConnectionInfo"), based on access control policies, the API consumer might have read only, write only, read/write, or no access at all to the attribute's value. In case the API consumer is not allowed to modify the value of the security sensitive attribute, and the modification request includes new attribute values, the whole modification request shall be rejected, and proper error information returned. | | | |

5.6.2.17 Type: PeerEntityConfigModifications

This type represents attribute modifications that were performed on an "Individual peer entity" resource. The attributes that can be included consist of those requested to be modified explicitly in the "PeerEntityConfigModificationRequest" data structure. If applicable, additional attributes of the "PeerEntity" data structure that were modified implicitly shall also be provided. It shall comply with the provisions defined in table 5.6.2.17-1.

Table 5.6.2.17-1: Definition of the PeerEntityConfigModifications data type

| Attribute name | Data type | Cardinality | Description |
|------------------------|--------------------------------|-------------|--|
| name | String | 0..1 | If present, this attribute signals modifications of the "name" attribute in "PeerEntity", as defined in clause 5.6.2.15. |
| description | String | 0..1 | If present, this attribute signals modifications of the "description" attribute in "PeerEntity", as defined in clause 5.6.2.15. |
| consumedManoInterfaces | map(ConsumedManoInterfaceInfo) | 0..N | If present, this attribute signals modifications of the "consumedManoInterfaces" attribute in "PeerEntity", as defined in clause 5.6.2.15. See note. |
| vimConnectionInfos | map(VimConnectionInfo) | 0..N | If present, this attribute signals modifications of the "vimConnectionInfos" attribute in "PeerEntity", as defined in clause 5.6.2.15. See note. |

| Attribute name | Data type | Cardinality | Description |
|---|-----------------------------|-------------|--|
| operationalState | OperationalStateEnumType | 0..1 | If present, this attribute signals modifications of the "operationalState" attribute in the "peerEntityState" structure in the "PeerEntity", as defined in clause 5.6.2.15. |
| administrativeState | AdministrativeStateEnumType | 0..1 | If present, this attribute signals modifications of the "administrativeState" attribute in the "peerEntityState" structure in the "PeerEntity", as defined in clause 5.6.2.15. |
| NOTE: Due to the security sensitive information contained within the attribute (refer to "securityInfo" within the "ConsumedManoInterfaceInfo" and "accessInfo" within the "VimConnectionInfo"), based on access control policies, the API consumer might have read only, write only, read/write, or no access at all to the attribute's value. In case the API consumer is not allowed to read the value of the security sensitive attribute, the attribute shall be omitted when the information is to be provided in a response message. | | | |

5.6.3 Referenced structured data types

5.6.3.1 Introduction

This clause defines data structures that can be referenced from data structures defined in the previous clauses, but can neither be resource representations nor bound to any subscribe/notify mechanism.

5.6.3.2 Type: ManoEntityComponent

This type represents information of a deployed component realizing part of an NFV-MANO functional entity. It is optional for the API producer to support this type. If supported, this type shall comply with the provisions defined in table 5.6.3.2-1.

Table 5.6.3.2-1: Definition of the ManoEntityComponent data type

| Attribute name | Data type | Cardinality | Description |
|----------------|------------------------|-------------|--|
| id | IdentifierInManoEntity | 1 | Identifier of the NFV-MANO functional entity component. |
| manoServiceIds | IdentifierInManoEntity | 0..N | References to the NFV-MANO services that depend on the NFV-MANO functional entity component. The identifier of the ManoService is referred. A service may depend on multiple components. Multiple services may depend on the same component. |

5.6.3.3 Type: ManoService

This type represents information about an NFV-MANO service provided by the NFV-MANO functional entity. It shall comply with the provisions defined in table 5.6.3.3-1.

Table 5.6.3.3-1: Definition of the ManoService data type

| Attribute name | Data type | Cardinality | Description |
|--|------------------------|-------------|---|
| id | IdentifierInManoEntity | 1 | Identifier of the NFV-MANO service. |
| name | String | 1 | Human-readable name of the NFV-MANO service. This attribute can be modified with the PATCH method. |
| description | String | 1 | Human-readable description of the NFV-MANO service. This attribute can be modified with the PATCH method. |
| manoServiceInterfaceIds | IdentifierInManoEntity | 1..N | Reference to the NFV-MANO interfaces associated to the NFV-MANO service. If cardinality is greater than one, the type of ManoServiceInterface (see clause 5.6.3.3) shall be the same. The identifier of the ManoServiceInterface is referred. See note. |
| _links | Structure (inlined) | 1 | Links to resources related to this resource. |
| >manoServiceInterfaces | Link | 1..N | Link to the "individual NFV-MANO service interface" resources with information about the associated interfaces to the NFV-MANO service. |
| NOTE: A cardinality greater than one supports having different interface versions or apiEndpoints to be used for accessing the same instance of an NFV-MANO service. | | | |

5.6.3.4 Type: NfvoSpecificInfo

This type represents information attributes specific to an NFVO entity, and that can be relevant to more than one NFV-MANO service offered by an NFVO entity. It shall comply with the provisions defined in table 5.6.3.4-1.

NOTE: The present document version does not specify the support for "maximum number of NS instances (attribute "maxNsInstanceNum")" as specified in clause 7.2.7.2 of ETSI GS NFV-IFA 031 [1].

Table 5.6.3.4-1: Definition of the NfvoSpecificInfo data type

| Attribute name | Data type | Cardinality | Description |
|-----------------------|---------------------|-------------|--|
| maxOnboardedNsdNum | Integer | 0..1 | Maximum number of NSDs that can be on-boarded on the NFVO. See note 2. |
| maxOnboardedVnfPkgNum | Integer | 0..1 | Maximum number of VNF Packages that can be on-boarded on the NFVO. See note 2. |
| supportedVnfdFormats | Structure (inlined) | 1..N | Supported VNFD data formats. |
| >vnfdFormat | Enum (inlined) | 1 | Name of the VNFD format. Permitted values: TOSCA: The VNFD follows TOSCA definition, according to ETSI GS NFV-SOL 001 [i.16]. YANG: The VNFD follows YANG definition according to ETSI GS NFV-SOL 006 [i.17]. |
| >standardVersion | Version | 1 | Name and version of the standard the VNFD is compliant to. See note 1. |
| supportedNsdFormats | Structure (inlined) | 1..N | Supported NSD data formats. |
| >nsdFormat | Enum (inlined) | 1 | Name of the NSD format. Permitted values: TOSCA: The VNFD follows TOSCA definition, according to ETSI GS NFV-SOL 001 [i.16]. YANG: The VNFD follows YANG definition according to ETSI GS NFV-SOL 006 [i.17]. |
| >standardVersion | Version | 1 | Name and version of the standard the NSD is compliant to. See note 1. |

| Attribute name | Data type | Cardinality | Description |
|--|----------------|-------------|---|
| certificateManagementMode | Enum (inlined) | 1..N | The supported list of VNF certificate management mode. Permitted values: DELEGATION-MODE: the CMF supports delegation-mode DIRECT-MODE: the CMF supports direct-mode |
| NOTE 1: The information to be provided in this attribute shall relate to the specification and version of the specification. For instance: "ETSI GS NFV-SOL 001 (V2.5.1)". | | | |
| NOTE 2: If this attribute is not present, the value of this parameter is undefined. | | | |

5.6.3.5 Type: VnfmSpecificInfo

This type represents information attributes specific to a VNFM entity, and that can be relevant to more than one NFV-MANO service offered by a VNFM entity. It shall comply with the provisions defined in table 5.6.3.5-1.

NOTE: The present document version does not specify the support for "maximum number of VNF instances (attribute "maxVnfInstanceNum")" as specified in clause 7.2.8.2 of ETSI GS NFV-IFA 031 [1].

Table 5.6.3.5-1: Definition of the VnfmSpecificInfo data type

| Attribute name | Data type | Cardinality | Description |
|---------------------------|---------------------|-------------|---|
| resourceMgmtModeSupport | Enum (inlined) | 1 | The supported resource management modes of the VNFM. Permitted values: DIRECT: The VNFM supports direct mode only. INDIRECT: The VNFM supports indirect mode only. BOTH: The VNFM supports both direct and indirect mode. |
| managedVnfInstanceInfos | String | 1..N | The kinds of VNF instances that can be managed, e.g. to determine the compatibility of a VNF with certain VNFM according to the <code>vnfmInfo</code> attribute in the VNFD (see table 7.1.2.2-1 in ETSI GS NFV-IFA 011 [i.2]). |
| supportedVnfdFormats | Structure (inlined) | 1..N | Supported VNFD data formats. |
| >vnfdFormat | Enum (inlined) | 1 | Name of the VNFD format. Permitted values: TOSCA: The VNFD follows TOSCA definition, according to ETSI GS NFV-SOL 001 [i.16]. YANG: The VNFD follows YANG definition according to ETSI GS NFV-SOL 006 [i.17]. |
| >standardVersion | Version | 1 | Name and version of the standard the VNFD is compliant to. See note. |
| certificateManagementMode | Enum (inlined) | 1..N | The supported list of VNF certificate management mode. Permitted values: DELEGATION-MODE: the CMF supports delegation-mode. DIRECT-MODE: the CMF supports direct-mode. |
| pmJobConnectionInfos | Structure (inlined) | 0..N | PM job connection information |
| >monitoringType | Enum | 1 | Indicates the type of tool to monitor the PM of the VNF instance managed by the VNFM. Permitted values: <ul style="list-style-type: none"> • VIM_CISM • EXTERNAL |

| Attribute name | Data type | Cardinality | Description |
|--|---------------------|-------------|---|
| >vimId | Identifier | 0..1 | Information about VIM or CISM connection(s) for monitoring resources for the VNF instance. May be present only if the "monitoringType" attribute in the "VnfmSpecificInfo" is "VIM_CISM". |
| >interfaceInfo | KeyValuePairs | 0..1 | Information about the interface(s) to the external monitoring tool, if available, including interface endpoint e.g. URL API version, and protocol type. May be present only if the "monitoringType" attribute in the "VnfmSpecificInfo" is "EXTERNAL". |
| >accessInfo | KeyValuePairs | 0..1 | Information about authentication credentials for accessing the external monitoring tool. Examples can include those to support different authentication schemes, e.g. OAuth, Token, Username/password, etc. May be present only if the "monitoringType" attribute in the "VnfmSpecificInfo" is "EXTERNAL". |
| >extra | KeyValuePairs | 0..1 | Monitoring type specific additional information. |
| fmConnectionInfos | Structure (inlined) | 0..N | FM connection information |
| >monitoringType | Enum | 1 | Indicates the type of tool to monitor faults of the VNF instance managed by the VNFM. Permitted values: <ul style="list-style-type: none"> • VIM_CISM • EXTERNA |
| >vimId | Identifier | 0..1 | Information about VIM or CISM connection(s) for monitoring resources for the VNF instance. May be present only if the "monitoringType" attribute in the "VnfmSpecificInfo" is "VIM_CISM". |
| >interfaceInfo | KeyValuePairs | 0..1 | Information about the interface(s) to the external monitoring tool, if available, including interface endpoint e.g. URL API version, and protocol type. May be present only if the "monitoringType" attribute in the "VnfmSpecificInfo" is "EXTERNAL". |
| >accessInfo | KeyValuePairs | 0..1 | Information about authentication credentials for accessing the external monitoring tool. Examples can include those to support different authentication schemes, e.g. OAuth, Token, Username/password, etc. May be present only if the "monitoringType" attribute in the "VnfmSpecificInfo" is "EXTERNAL". |
| >extra | KeyValuePairs | 0..1 | Monitoring type specific additional information. |
| NOTE: The information to be provided in this attribute shall relate to the specification and version of the specification. For instance: "ETSI GS NFV-SOL 001 (V5.1.1)". | | | |

5.6.3.6 Type: VimSpecificInfo

This type represents information attributes specific to a VIM entity, and that can be relevant to more than one NFV-MANO service offered by a VIM entity. It shall comply with the provisions defined in table 5.6.3.6-1.

NOTE: The present document version does not specify the support for "maximum number of virtualised resources (attribute "maxVirtualResourceNum")" as specified in clause 7.2.9.2 of ETSI GS NFV-IFA 031 [1].

Table 5.6.3.6-1: Definition of the VimSpecificInfo data type

| Attribute name | Data type | Cardinality | Description |
|-------------------------------------|--|-------------|---|
| imageContainerFormats | String | 1..N | List of supported image container formats. Container format indicates whether a software image is in a file that also contains metadata about the actual software. Valid values are all values for "container_format" as defined in ETSI GS NFV-SOL 001 [i.16] and all values for "container-format" as defined in ETSI GS NFV-SOL 006 [i.17]. |
| imageDiskFormats | String | 1..N | List of supported image disk formats. The Disk format of a software image is the format of the underlying disk image. Valid values are all values for "disk_format" as defined in ETSI GS NFV-SOL 001 [i.16] and all values of "disk-format" as defined in ETSI GS NFV-SOL 006 [i.17]. |
| imageSignatureVerification | Structure (inlined) | 1 | Information about the supported mechanisms, algorithms, and protocols for verifying the signature of software images. |
| >additionalVerificationCapabilities | KeyValuePairs | 0..1 | List of additional image signature verification capabilities. The "key" in the KeyValuePairs determines the name of the capability, and the "value" shall indicate whether or not the capability is enabled. Examples of capabilities can include performing a validation of the image's signing certificate during the image signature verification. |
| >signatureVerificationAlgorithms | Structure (inlined) | 1..N | List of algorithms for verifying the signature of software images that are supported by the VIM. |
| >>algorithm | String | 1 | The name of the algorithm. Permitted values are: "RSA", "DSA", "ECDSA". |
| >>keyLengths | String | 1..N | List of supported key lengths of the algorithm. The key length indicates the number of bits, such as "256", "512", etc. See note. |
| >>additionalAlgParams | KeyValuePairs | 0..1 | Additional parameters specific to the signature verification algorithm. |
| imageDigestAlgorithms | Structure (inlined) | 1..N | List of supported digest algorithms that can be used for digital signatures. |
| >algorithm | String | 1 | The name of the algorithm. Permitted values are: "SHA2", "SHA3". |
| >keyLengths | String | 1..N | List of supported key lengths of the algorithm. The key length indicates the number of bits, such as "256", "512", etc. See note. |
| NOTE: | Recommendations on appropriate algorithms and key lengths are given e.g. in NIST Special Publication 800-57 Part 3 Revision 1 [i.26] or in documents related to local legislation. | | |

5.6.3.7 Type: ManoEntityConfigurableParams

This type represents list of parameters that can be configured on the NFV-MANO functional entity. It shall comply with the provisions defined in table 5.6.3.7-1.

NOTE: As of the current release of the present document the Certificate Management Function (CMF) is out of scope of ETSI GS NFV 006 [i.3] however it is included in the present document with the rest of NFV-MANO interoperability for the purpose of discovery only.

Table 5.6.3.7-1: Definition of the ManoEntityConfigurableParams data type

| Attribute name | Data type | Cardinality | Description |
|--|--------------------|-------------|--|
| clockSyncs | map(ClockSyncInfo) | 1..N | Properties of the clock synchronization to be used by the NFV-MANO functional entity. The keys of the map, each of which identifies a particular ClockSyncInfo structure, are managed by the API consumer. |
| defaultLogCompileBySizeValue | UnsignedInt | 1 | Default value for the log compilation by size to be used. |
| defaultLogCompileByTimerValue | UnsignedInt | 1 | Default value for the log compilation by timer to be used. |
| certificateManagement | Enum (inlined) | 0..N | The supported list of VNF certificate management mode. See note. Permitted values: DELEGATION-MODE: the CMF supports delegation-mode DIRECT-MODE: the CMF supports direct-mode |
| NOTE: This attribute shall not be configured into CMF. | | | |

5.6.3.8 Type: ConsumedManoInterfaceInfo

This type represents an interface consumed by the producer NFV-MANO functional entity from another peer functional entity. It shall comply with the provisions defined in table 5.6.3.8-1.

Table 5.6.3.8-1: Definition of the ConsumedManoInterfaceInfo data type

| Attribute name | Data type | Cardinality | Description |
|-----------------|---------------------|-------------|---|
| name | String | 1 | Human-readable name of the NFV-MANO interface. |
| type | String | 1 | Type of the NFV-MANO service interface consumed by the NFV-MANO functional entity. Valid values are defined in clause 5.6.4.3. |
| standardVersion | Version | 1 | Version of the standard the interface is compliant to. See note 1. |
| apiVersion | Version | 1 | API version, in compliance with the version identifiers and parameters format specified in clause 9.1 of ETSI GS NFV-SOL 013 [4]. |
| apiEndpoint | Structure (inlined) | 1 | Consumable API endpoint of the interface. It provides the information relevant about the protocol, host and port, and path where the interface API can be accessed. |
| >apiRoot | Uri | 0..1 | Indicates the scheme ("http" or "https"), the host name and optional port, and an optional sequence of path segments that together represent a prefix path. Shall be present for ETSI NFV specified RESTful NFV-MANO APIs (see also clause 4.1 of ETSI GS NFV-SOL 013 [4]). May be present otherwise. |

| Attribute name | Data type | Cardinality | Description |
|--|-----------------------------|-------------|--|
| >apiName | String | 0..1 | Indicates the interface name in an abbreviated form. Shall be present for ETSI NFV specified RESTful NFV-MANO APIs. The {apiName} of each interface is defined in the standard the interface is compliant to (see also clause 4.1 of ETSI GS NFV-SOL 013 [4]). May be present otherwise. |
| >apiMajorVersion | String | 0..1 | Indicates the current major version of the API. Shall be present for ETSI NFV specified RESTful NFV-MANO APIs. The major version is defined in the standard the interface is compliant to (see also clause 4.1 of ETSI GS NFV-SOL 013 [4]). May be present otherwise. |
| >apiUri | Uri | 1 | URL of the API endpoint. For ETSI NFV specified RESTful NFV-MANO APIs, the following prefix structure is used (see also clause 4.1 of ETSI GS NFV-SOL 013 [4]): {apiRoot}/{apiName}/{apiMajorVersion}. |
| securityInfo | ClientInterfaceSecurityInfo | 0..1 | Security related information including credentials information if needed for consuming the API. See note 2. |
| <p>NOTE 1: The information to be provided in this attribute shall relate to the specification and its version. For instance: "ETSI GS NFV-SOL 003 (V2.4.1)".</p> <p>NOTE 2: Due to the security sensitive information associated to the attribute, based on access control policies, the API consumer might have read only, write only, read/write, or no access at all to the attribute's value. In case the API consumer is not allowed to read the value of the security sensitive attribute, the attribute shall be omitted when the information is to be provided in a response message, and shall be provided otherwise. In case the API consumer is not allowed to modify the value of the security sensitive attribute, and the modification request includes new attribute values, the whole modification request shall be rejected, and proper error information returned.</p> | | | |

5.6.3.9 Type: CimNotificationsFilter

This type represents a subscription filter related to notifications about NFV-MANO configuration and information management. It shall comply with the provisions defined in table 5.6.3.9-1.

At a particular nesting level in the filter structure, the following applies: All attributes shall match in order for the filter to match (logical "and" between different filter attributes). If an attribute is an array, the attribute shall match if at least one of the values in the array matches (logical "or" between the values of one filter attribute).

Table 5.6.3.9-1: Definition of the CimNotificationsFilter data type

| Attribute name | Data type | Cardinality | Description |
|--|------------------------------|-------------|---|
| manoEntitySubscriptionFilter | ManoEntitySubscriptionFilter | 0..1 | Filter criteria to select the NFV-MANO functional entity and its associated managed objects. |
| notificationTypes | Enum (inlined) | 0..N | Match particular notification types. Permitted values: <ul style="list-style-type: none"> InformationChangedNotification ChangeStateNotification See note. |
| <p>NOTE: The permitted values of the "notificationTypes" attribute are spelled exactly as the names of the notification types to facilitate automated code generation systems.</p> | | | |

5.6.3.10 Type: ClockSyncInfo

This type represents parameters for connecting to an NTP server. It shall comply with the provisions defined in table 5.6.3.10-1.

Table 5.6.3.10-1: Definition of the ClockSyncInfo data type

| Attribute name | Data type | Cardinality | Description |
|---|---------------------|-------------|---|
| type | Enum (inlined) | 1 | Type of clock synchronization. Permitted values: <ul style="list-style-type: none"> NTP: For Network Time Protocol (NTP) based clock synchronization. OTHER: For other types of clock synchronization. |
| ntpServerInfo | Structure (inlined) | 0..1 | Information for the NTP based clock synchronization. Shall be present if type = "NTP". |
| >ipAddress | IpAddress | 0..1 | IP address of the NTP server. See note. |
| >hostname | String | 0..1 | Indicates the hostname of the NTP server. See note. |
| otherClockSyncParams | KeyValuePairs | 0..1 | Information for the other types of clock synchronization. May be present if type = "OTHER". |
| NOTE: Either ipAddress or hostname shall be set, but not both at the same time. | | | |

5.6.3.11 Type: ServerInterfaceSecurityInfo

This type represents security related information of an NFV-MANO service interface produced by an NFV-MANO functional entity. It shall comply with the provisions defined in table 5.6.3.11-1.

Table 5.6.3.11-1: Definition of the ServerInterfaceSecurityInfo data type

| Attribute name | Data type | Cardinality | Description |
|------------------------|---------------------|-------------|--|
| authType | Enum (inlined) | 1..N | Type of API request authorization to be used by the API producer. The support of authorization methods for the API producer is specified in clause 8.3.6 of ETSI GS NFV-SOL 013 [4]. Permitted values: <ul style="list-style-type: none"> TLS_TUNNEL: Using TLS tunnel, as defined by TLS 1.2 in IETF RFC 5246 [i.14]. TLS_TUNNEL_13: Using TLS tunnel, as defined by TLS 1.3 in IETF RFC 8446 [i.28]. OAuth2: Using access token, as defined by the OAuth 2.0 specification in IETF RFC 6749 [i.15]. |
| oauthServerInfo | Structure (inlined) | 1 | OAuth 2.0 authorization server information and configuration. |
| >dynamicDiscovery | Structure (inlined) | 0..1 | Configuration data used when performing dynamic discovery of the authorization server identifier. See note. |
| >>webFingerHost | Uri | 1 | Server where the WebFinger service is hosted. When used, the request to the WebFinger resource shall conform as specified in clause 5.1.3 of ETSI GS NFV-SEC 022 [5]. |
| >providedConfiguration | Structure (inlined) | 1 | Configuration data used to setup the authorization server identifier. See note. |
| >>authServerId | Uri | 1 | Authorization server identifier as defined in ETSI GS NFV-SEC 022 [5]. |
| >tlsCipherSuites | String | 1..N | List of cipher suites that shall be declared as supported by the API producer when performing the SSL or TLS negotiation with the authorization server. Valid values of cipher suites are defined in IETF RFC 8447 [6]. |
| tlsTunnelInfo | Structure (inlined) | 0..1 | Information and configuration related to the use of TLS tunnel. Shall be present if authType contains "TLS_TUNNEL". |

| Attribute name | Data type | Cardinality | Description |
|--|-----------|-------------|---|
| >tlsTunnelCipherSuites | String | 1..N | List of cipher suites that shall be declared as supported by the API producer when performing the SSL or TLS negotiation with the API client. Valid values of cipher suites are defined in IETF RFC 8447 [6]. |
| NOTE: Provided configuration of the OAuth 2.0 authorization server information and configuration shall be supported, and dynamic configuration may be supported. | | | |

5.6.3.12 Type: ClientInterfaceSecurityInfo

This type represents security related information for accessing an NFV-MANO service interface produced by an NFV-MANO functional entity. It shall comply with the provisions defined in table 5.6.3.12-1.

Table 5.6.3.12-1: Definition of the ClientInterfaceSecurityInfo data type

| Attribute name | Data type | Cardinality | Description |
|--|---------------------|-------------|--|
| authType | Enum (inlined) | 1..N | Type of API request authorization to be used by the API consumer accessing the API. The support of authorization methods for the API consumer is specified in clause 8.3.6 of ETSI GS NFV-SOL 013 [4]. Permitted values: <ul style="list-style-type: none"> • TLS_TUNNEL: Using TLS tunnel, as defined by TLS 1.2 in IETF RFC 5246 [i.14]. • TLS_TUNNEL_13: Using TLS tunnel, as defined by TLS 1.3 in IETF RFC 8446 [i.28]. • OAUTH2: Using access token, as defined by the OAuth 2.0 specification in IETF RFC 6749 [i.15]. |
| oauthServerInfo | Structure (inlined) | 1 | OAuth 2.0 authorization server information and configuration. |
| >dynamicDiscovery | Structure (inlined) | 0..1 | Configuration data used when performing dynamic discovery of the authorization server identifier. See note. |
| >>webFingerHost | Uri | 1 | Server where the WebFinger service is hosted. When used, the request to the WebFinger resource shall conform as specified in clause 5.1.3 of ETSI GS NFV-SEC 022 [5]. |
| >providedConfiguration | Structure (inlined) | 1 | Configuration data used to setup the authorization server identifier. See note. |
| >>authServerId | Uri | 1 | Authorization server identifier as defined in ETSI GS NFV-SEC 022 [5]. |
| >tlsCipherSuites | String | 1..N | List of cipher suites that shall be declared as supported by the API consumer when performing the SSL or TLS negotiation with the authorization server. Valid values of cipher suites are defined in IETF RFC 8447 [6]. |
| tlsTunnelInfo | Structure (inlined) | 0..1 | Information and configuration related to the use of TLS tunnel. Shall be present if authType contains "TLS_TUNNEL". |
| >tlsTunnelCipherSuites | String | 1..N | List of cipher suites that shall be declared as supported by the API consumer when performing the SSL or TLS negotiation with the API producer. Valid values of cipher suites are defined in IETF RFC 8447 [6]. |
| NOTE: Provided configuration of the OAuth 2.0 authorization server information and configuration shall be supported, and dynamic configuration may be supported. | | | |

5.6.3.13 Type: WimSpecificInfo

This type represents information attributes specific to a WIM entity, and that can be relevant to more than one NFV-MANO service offered by a WIM entity. It shall comply with the provisions defined in table 5.6.3.13-1.

NOTE: The present document version does not specify the support for a) "list of protocols of particular layers used to realize an MSNC that are supported by the WIM (attribute "msncLayerProtocolSupport")" as specific in clause 7.2.14.2 of ETSI GS NFV-IFA 031 [1].

Table 5.6.3.13-1: Definition of the WimSpecificInfo data type

| Attribute name | Data type | Cardinality | Description |
|--------------------------|---------------------|-------------|---|
| maxMscsNums | Structure (inlined) | 1..N | Maximum number of MSCS that the WIM can manage. |
| >numMscs | Integer | 1 | Maximum number of MSCS. |
| >criteriaNumMscs | KeyValuePairs | 0..1 | Reference criteria for derivation/computation of the referred maximum number of MSCS in attribute "numMscs". Shall be provided if specific criteria has been taken into account for deriving the referred number. |
| maxMsnNum | Structure (inlined) | 1..N | Maximum number of MSNC that the WIM can manage. |
| >numMsn | Integer | 1 | Maximum number of MSNC. |
| >criteriaNumMsn | KeyValuePairs | 0..1 | Reference criteria for derivation/computation of the referred maximum number of MSNC in attribute "numMsn". Shall be provided if specific criteria has been taken into account for deriving the referred number. |
| mscsLayerProtocolSupport | Enum (inlined) | 1..N | List of protocols of particular layers used to realize an MSCS that are supported by the WIM. Permitted values are as listed below: EVPN_BGP/MPLS: L2 MSCS realized by BGP MPLS-based Ethernet VPN (EVPN) as specified in IETF RFC 7432 [i.19]. EVPN_VPWS: L2 MSCS realized by EVPN Virtual Private Wire Service (VPWS) as specified in IETF RFC 8214 [i.25]. VPLS_BGP: L2 MSCS realized by Virtual Private LAN Service (VPLS) using BGP as specified in IETF RFC 4761 [i.20] and IETF RFC 6624 [i.21]. VPLS_LDP_L2TP: L2 MSCS realized by VPLS using Label Distribution Protocol (LDP) Layer 2 Tunnelling Protocol (L2TP) as specified in IETF RFC 4762 [i.22] and IETF RFC 6074 [i.23]. VPWS_LDP_L2TP: L2 MSCS realized by VPWS using LDP L2TP as specified in IETF RFC 6074 [i.23]. BGP_IP_VPN: L3 MSCS realized by BGP/MPLS based IP VPN as specified in IETF RFC 4364 [i.24]. |

5.6.3.14 Type: CismSpecificInfo

This type represents information attributes specific to a CISM entity, and that can be relevant to more than one NFV-MANO service offered by a CISM entity. It shall comply with the provisions defined in table 5.6.3.14-1.

NOTE: No attributes are specified in the present document version. The definition of attributes is left for future specification.

Table 5.6.3.14-1: Definition of the CismSpecificInfo data type

| Attribute name | Data type | Cardinality | Description |
|----------------|-----------|-------------|-------------|
| None | | | |

5.6.3.15 Type: CirSpecificInfo

This type represents information attributes specific to a CIR entity, and that can be relevant to more than one NFV-MANO service offered by a CIR entity. It shall comply with the provisions defined in table 5.6.3.15-1.

Table 5.6.3.15-1: Definition of the CirSpecificInfo data type

| Attribute name | Data type | Cardinality | Description |
|----------------------------------|--|-------------|--|
| osContainerImageFormats | String | 1..N | List of supported OS container image formats. Valid values are all values for "container_format" as defined in ETSI GS NFV-SOL 001 [i.16] and all values for "container-format" as defined in ETSI GS NFV-SOL 006 [i.17]. |
| imageSignatureVerification | Structure (inlined) | 1 | Information about the supported mechanisms, algorithms, and protocols for verifying the signature of software images. |
| >signatureVerificationAlgorithms | Structure (inlined) | 1..N | List of algorithms for verifying the signature of software images that are supported by the CIR. |
| >>algorithm | String | 1 | The name of the algorithm. Permitted values are: "RSA", "DSA", "ECDSA". |
| >>keyLengths | String | 1..N | List of supported key lengths of the algorithm. The key length indicates the number of bits, such as "256", "512", etc. See note. |
| >>additionalAlgParams | KeyValuePairs | 0..1 | Additional parameters specific to the signature verification algorithm. |
| imageDigestAlgorithms | Structure (inlined) | 1..N | List of supported digest algorithms that can be used for digital signatures. |
| >algorithm | String | 1 | The name of the algorithm. Permitted values are: "SHA2", "SHA3". |
| >keyLengths | String | 1..N | List of supported key lengths of the algorithm. The key length indicates the number of bits, such as "256", "512", etc. See note. |
| NOTE: | Recommendations on appropriate algorithms and key lengths are given e.g. in NIST Special Publication 800-57 Part 3 Revision 1 [i.26] or in documents related to local legislation. | | |

5.6.3.16 Type: CcmSpecificInfo

This type represents information attributes specific to a CCM entity, and that can be relevant to more than one NFV-MANO service offered by a CCM entity. It shall comply with the provisions defined in table 5.6.3.16-1.

NOTE: The present document version does not specify the support for "supported CIS Cluster Descriptors (CCD) data formats (attribute "supportedCcdFormat")" as specified in clause 7.2.18 of ETSI GS NFV-IFA 031 [1] pending on the development of other related protocol and data models specifications for CIS cluster management.

Table 5.6.3.16-1: Definition of the CcmSpecificInfo data type

| Attribute name | Data type | Cardinality | Description |
|---|----------------|-------------|--|
| clusterResourceMgmtModes | Enum (inlined) | 1..N | <p>The supported cluster resource management modes. Available modes include: virtual and bare-metal resources, and for both types, on-demand (i.e. CCM requests to corresponding infrastructure managers to build necessary pools of resources) or pooled (i.e. CCM manages resources from pre-allocated resource pools). Multiple values can be specified. See note.</p> <p>Permitted values: VIRTUAL-ON-DEMAND: virtual resources on demand. VIRTUAL-POOLED: virtual resources from a pre-allocated resource pool. BARE-METAL-ON-DEMAND: bare-metal resources on demand. BARE-METAL-POOLED: bare-metal resources from a pre-allocated resource pool.</p> |
| NOTE: Hybrid CIS clusters include both physical and virtual CIS cluster nodes and can be supported by a combination of relevant "clusterResourceMgmtModes". | | | |

5.6.3.17 Type: MdafSpecificInfo

This type represents information attributes specific to a MDAF entity, and that can be relevant to more than one NFV-MANO service offered by a MDAF entity. It shall comply with the provisions defined in table 5.6.3.17-1.

Table 5.6.3.17-1: Definition of the MdafSpecificInfo data type

| Attribute name | Data type | Cardinality | Description |
|--------------------|-----------|-------------|---|
| dataAnalyticsTypes | String | 1..N | The supported list of data analytics types. Examples include "Network service alarm incident analysis" and others specified in ETSI GS NFV-IFA 047 [i.30]). |

5.6.3.18 Type: CmfSpecificInfo

This type represents information attributes specific to a CMF entity, and that can be relevant to more than one NFV-MANO service offered by a CMF entity. It shall comply with the provisions defined in table 5.6.3.18-1.

Table 5.6.3.18-1: Definition of the CmfSpecificInfo data type

| Attribute name | Data type | Cardinality | Description |
|---------------------------|----------------|-------------|--|
| certificateManagementMode | Enum (inlined) | 1..N | <p>The supported list of VNF certificate management mode.</p> <p>Permitted values: DELEGATION-MODE: the CMF supports delegation-mode. DIRECT-MODE: the CMF supports direct mode.</p> |

5.6.4 Referenced simple data types and enumerations

5.6.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

5.6.4.2 Simple data types

No particular simple data types are defined for this interface, in addition to those defined in clause 4.2.3.

5.6.4.3 Type: ManoServiceInterfaceTypeShortName

For the RESTful NFV-MANO APIs, valid values are all values for "apiName" as defined in ETSI GS NFV-SOL 002 [9], ETSI GS NFV-SOL 003 [10], ETSI GS NFV-SOL 005 [11], ETSI GS NFV-SOL 011 [13] and ETSI GS NFV-SOL 012 [14].

For the NFV-MANO service interfaces for which no API is specified by ETSI NFV, valid values are defined in table 5.6.4.3-1.

NOTE: The table is expected to be updated, by removing the corresponding listed entries, once the interfaces are specified as a RESTful NFV-MANO API.

Table 5.6.4.3-1: String values for types of NFV-MANO service interfaces

| Acronym string value | Description |
|----------------------|---|
| "sim" | Represents the "Software Image Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vcrm" | Represents the "Virtualised Compute Resources Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vcrim" | Represents the "Virtualised Compute Resources Information Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vcracam" | Represents the "Virtualised Compute Resources Capacity Management" interface produced by a VIM (refer to IFA005). |
| "vrcrn" | Represents the "Virtualised Compute Resources Change Notification" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vcfm" | Represents the "Virtualised Compute Flavour Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vnrm" | Represents the "Virtualised Network Resources Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vnrim" | Represents the "Virtualised Network Resources Information Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vnrcam" | Represents the "Virtualised Network Resources Capacity Management" interface produced by a VIM (refer to IFA005). |
| "vnrcn" | Represents the "Virtualised Network Resources Change Notification" interface produced by a VIM (refer to IFA005 and IFA006). |
| "nfpm" | Represents the "Network Forwarding Path Management" interface produced by a VIM (refer to IFA005). |
| "vsrm" | Represents the "Virtualised Storage Resources Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vsrim" | Represents the "Virtualised Storage Resources Information Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vsrcam" | Represents the "Virtualised Storage Resources Capacity Management" interface produced by a VIM (refer to IFA005). |
| "vsrcn" | Represents the "Virtualised Storage Resources Change Notification" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vrpm" | Represents the "Virtualised Resources Performance Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vrfm" | Represents the "Virtualised Resources Fault Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vcrmm" | Represents the "Virtualised Compute Resources Reservation Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vnrmm" | Represents the "Virtualised Network Resources Reservation Management" interface produced by a VIM (refer to IFA005 and IFA006). |

| Acronym string value | Description |
|----------------------|---|
| "vsrmm" | Represents the "Virtualised Storage Resources Reservation Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vrrcn" | Represents the "Virtualised Resources Reservation Change Notification" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vcrqm" | Represents the "Virtualised Compute Resources Quota Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vnrqm" | Represents the "Virtualised Network Resources Quota Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vsrqm" | Represents the "Virtualised Storage Resources Quota Management" interface produced by a VIM (refer to IFA005 and IFA006). |
| "vrqcn" | Represents the "Virtualised Resources Quota Change Notification" interface produced by a VIM (refer to IFA005 and IFA006). |
| "chrm" | Represents the "Compute Host Reservation Management" interface produced by a VIM (refer to IFA005). |
| "chcam" | Represents the "Compute Host Capacity Management" interface produced by a VIM (refer to IFA005). |
| "vnfspkgm" | Represents the "VNF Snapshot Package Management" interface produced by a VNFM (refer to IFA007 and IFA013). This value is deprecated and it can be removed in subsequent versions of the present document. ETSI GS NFV-SOL 005 [11] has specified to use the string "vnfsnapshotpkgm" as "apiName". |
| "vcrm_ind" | Represents the indirect "Virtualised Compute Resources Management" interface produced by an NFVO (refer to IFA007). |
| "vcrim_ind" | Represents the indirect "Virtualised Compute Resources Information Management" interface produced by an NFVO (refer to IFA007). |
| "vrcrn_ind" | Represents the indirect "Virtualised Compute Resources Change Notification" interface produced by an NFVO (refer to IFA007). |
| "vsrm_ind" | Represents the indirect "Virtualised Storage Resources Management" interface produced by an NFVO (refer to IFA007). |
| "vsrim_ind" | Represents the indirect "Virtualised Storage Resources Information Management" interface produced by an NFVO (refer to IFA007). |
| "vsrqn_ind" | Represents the indirect "Virtualised Storage Resources Change Notification" interface produced by an NFVO (refer to IFA007). |
| "vnrm_ind" | Represents the indirect "Virtualised Network Resources Management" interface produced by an NFVO (refer to IFA007). |
| "vnrim_ind" | Represents the indirect "Virtualised Network Resources Information Management" interface produced by an NFVO (refer to IFA007). |
| "vnrcn_ind" | Represents the indirect "Virtualised Network Resources Change Notification" interface produced by an NFVO (refer to IFA007). |
| "vrrm_ind" | Represents the indirect "Virtualised Compute Resources Reservation Management" interface produced by an NFVO (refer to IFA007). |
| "vsrm_ind" | Represents the indirect "Virtualised Storage Resources Reservation Management" interface produced by an NFVO (refer to IFA007). |
| "vnrm_ind" | Represents the indirect "Virtualised Network Resources Reservation Management" interface produced by an NFVO (refer to IFA007). |
| "vrrcn_ind" | Represents the indirect "Virtualised Resources Reservation Change Notification" interface produced by an NFVO (refer to IFA007). |
| "vrpm_ind" | Represents the indirect "Virtualised Resources Performance Management" interface produced by an NFVO (refer to IFA007). |
| "vrfm_ind" | Represents the indirect "Virtualised Resources Fault Management" interface produced by an NFVO (refer to IFA007). |
| "vcrqm_ind" | Represents the indirect "Virtualised Resources Compute Quota Management" interface produced by an NFVO (refer to IFA007). |
| "vsrqm_ind" | Represents the indirect "Virtualised Storage Resources Quota Management" interface produced by an NFVO (refer to IFA007). |
| "vnrqm_ind" | Represents the indirect "Virtualised Network Resources Quota Management" interface produced by an NFVO (refer to IFA007). |
| "vrqcn_ind" | Represents the indirect "Virtualised Resources Quota Change Notification" interface produced by an NFVO (refer to IFA007). |
| "lcmcoord" | Represents the "LCM Coordination" interface produced by an EM and OSS (refer to IFA008 and IFA013). |
| "mscsm" | Represents the "MSCS Management" interface produced by a WIM (refer to IFA032). |
| "mscscapm" | Represents the "(MSCS) Capacity Management" interface produced by a WIM (refer to IFA032). |
| "mscsfm" | Represents the "(MSCS) Fault Management" interface produced by a WIM (refer to IFA032). |

| Acronym string value | Description |
|----------------------|---|
| "mscspm" | Represents the "(MSCS) Performance Management" interface produced by a WIM (refer to IFA032). |
| "cismwkldm" | Represents the "OS container workload management" service interface produced by a CISM (refer to IFA040). |
| "cismcompm" | Represents the "OS container compute management" service interface produced by a CISM (refer to IFA040). |
| "cismstrgm" | Represents the "OS container storage management" service interface produced by a CISM (refer to IFA040). |
| "cismnetwm" | Represents the "OS container network management" service interface produced by a CISM (refer to IFA040). |
| "cismcfgm" | Represents the "OS container configuration management" service interface produced by a CISM (refer to IFA040). |
| "cismcisim" | Represents the "CIS instance management" service interface produced by a CISM (refer to IFA036). |
| "cismcismccom" | Represents the "CIS MCCO management" service interface produced by a CISM (refer to IFA036). |
| "cirimgm" | Represents the "OS container image management" service interface produced by a CIR (refer to IFA040). |
| "ccmcisclcm" | Represents the "CIS cluster lifecycle management" service interface produced by a CCM (refer to IFA036). |
| "ccmciscfm" | Represents the "CIS cluster fault management" service interface produced by a CCM (refer to IFA036). |
| "ccmciscpm" | Represents the "CIS cluster performance management" service interface produced by a CCM (refer to IFA036). |
| "ccmciscsm" | Represents the "CIS cluster configuration management" service interface produced by a CCM (refer to IFA036). |
| "ccmciscsm" | Represents the "CIS cluster security management" service interface produced by a CCM (refer to IFA036). |
| "mdafda" | Represents the "Data analytics" service interface produced by a MDAF (refer to IFA047). |
| NOTE: | "IFA005", "IFA006", "IFA007", "IFA008", "IFA013", "IFA032", "IFA040", "IFA036", "IFA037" are used as a shorthand for the specifications ETSI GS NFV-IFA 005 [i.5], ETSI GS NFV-IFA 006 [i.6], ETSI GS NFV-IFA 007 [i.7], ETSI GS NFV-IFA 008 [i.8], ETSI GS NFV-IFA 013 [i.9], ETSI GS NFV-IFA 032 [i.18], ETSI GS NFV-IFA 040 [i.27], ETSI GS NFV-IFA 036 [i.29], and ETSI GS NFV-IFA 047 [i.30] respectively. |

5.6.4.4 Enumeration: OperationalStateEnumType

The enumeration OperationalStateEnumType defines values representing the operational state of an NFV-MANO functional application type of managed entity.

The OperationalStateEnumType shall comply with the provisions defined in table 5.6.4.4-1.

Table 5.6.4.4-1: Enumeration OperationalStateEnumType

| Enumeration value | Description |
|-------------------|--|
| STARTED | The managed entity is operational. |
| STOPPED | The managed entity is not operational. |
| STOPPING | The managed entity is in the transition to stop. |
| STARTING | The managed entity is in the transition to start and become operational. |
| RESTARTING | The managed entity is in the transition to stop and start again. |

5.6.4.5 Enumeration: AdministrativeStateEnumType

The enumeration AdministrativeStateEnumType defines values representing the administrative state of a managed entity.

The AdministrativeStateEnumType shall comply with the provisions defined in table 5.6.4.5-1.

Table 5.6.4.5-1: Enumeration AdministrativeStateEnumType

| Enumeration value | Description |
|-------------------|---|
| LOCKED | The managed entity is administratively prohibited to be used. |
| UNLOCKED | The managed entity is administratively allowed to be used. |
| LOCKING | The managed entity is in the transition to be locked. |

5.6.4.6 Enumeration: UsageStateEnumType

The enumeration UsageStateEnumType defines values representing the usage state of a managed entity.

The UsageStateEnumType shall comply with the provisions defined in table 5.6.4.6-1.

Table 5.6.4.6-1: Enumeration UsageStateEnumType

| Enumeration value | Description |
|-------------------|---|
| IN_USE | The managed entity is currently being used. |
| NOT_IN_USE | The managed entity is currently not being used. |

5.6.4.7 Enumeration: ChangeOperationalStateEnumType

The enumeration ChangeOperationalStateEnumType defines permitted values for the change state operation.

The ChangeOperationalStateEnumType shall comply with the provisions defined in table 5.6.4.7-1.

Table 5.6.4.7-1: Enumeration ChangeOperationalStateEnumType

| Enumeration value | Description |
|-------------------|---|
| START | To start the managed entity. |
| STOP | To stop the managed entity. |
| RESTART | To stop and start again the managed entity. |

5.6.4.8 Enumeration: ChangeAdministrativeStateEnumType

The enumeration ChangeAdministrativeStateEnumType defines permitted values for the change of administrative state operation.

The ChangeAdministrativeStateEnumType shall comply with the provisions defined in table 5.6.4.8-1.

Table 5.6.4.8-1: Enumeration ChangeAdministrativeStateEnumType

| Enumeration value | Description |
|-------------------|-------------------------------|
| LOCK | To lock the managed entity. |
| UNLOCK | To unlock the managed entity. |

5.6.4.9 Enumeration: InterfaceOperationalStateEnumType

The enumeration InterfaceOperationalStateEnumType defines values representing the operational state of an NFV-MANO service interface type of managed entity.

The InterfaceOperationalStateEnumType shall comply with the provisions defined in table 5.6.4.9-1.

Table 5.6.4.9-1: Enumeration InterfaceOperationalStateEnumType

| Enumeration value | Description |
|-------------------|--|
| STARTED | The managed entity is operational. |
| STOPPED | The managed entity is not operational. |
| STOPPING | The managed entity is in the transition to stop. |
| STARTING | The managed entity is in the transition to start and become operational. |

5.6.4.10 Enumeration: StopEnumType

The enumeration ChangeStateOpOccStateEnumType defines permitted values for the change state operation. It shall comply with the provisions defined in table 5.6.4.10-1.

Table 5.6.4.10-1: Enumeration ChangeStateOpOccStateEnumType

| Enumeration value | Description |
|-------------------|--|
| GRACEFUL | To stop the managed entity immediately after accepting the request. |
| FORCEFUL | To stop the managed entity attempting to gracefully discharge the entity from service. |

5.6.4.11 Enumeration: ChangeStateOpOccStateEnumType

The enumeration ChangeStateOpOccStateEnumType defines permitted values for the change state operation. It shall comply with the provisions defined in table 5.6.4.11-1.

Table 5.6.4.11-1: Enumeration ChangeStateOpOccStateEnumType

| Enumeration value | Description |
|-------------------|---|
| PROCESSING | The change state operation is currently in execution. |
| COMPLETED | The change state operation has been completed successfully. |
| FAILED | The change state operation has failed. |

5.6.4.12 Enumeration: ManoEntityEnumType

The enumeration ManoEntityEnumType defines the permitted values to represent NFV-MANO functional entities. It shall comply with the provisions defined in table 5.6.4.12-1.

NOTE: As of the current release of the present document the Certificate Management Function (CMF) is out of scope of ETSI GS NFV 006 [i.3] however it is included in the present document with the rest of NFV-MANO interoperability for the purpose of discovery only.

Table 5.6.4.12-1: Enumeration ManoEntityEnumType

| Enumeration value | Description |
|-------------------|--|
| NFVO | The NFV-MANO functional entity is an NFVO. |
| VNFM | The NFV-MANO functional entity is a VNFM. |
| VIM | The NFV-MANO functional entity is a VIM. |
| WIM | The NFV-MANO functional entity is a WIM. |
| CISM | The NFV-MANO functional entity is a CISM. |
| CIR | The NFV-MANO functional entity is a CIR. |
| CCM | The NFV-MANO functional entity is a CCM. |
| MDAF | The NFV-MANO functional entity is a MDAF. |
| CMF | The NFV-MANO functional entity is a CMF. |

5.6.4.13 Enumeration: PeerEntityEnumType

The enumeration PeerEntityEnumType defines the permitted values to represent peer functional entities. It shall comply with the provisions defined in table 5.6.4.13-1.

NOTE: As of the current release of the present document the Certificate Management Function (CMF) is out of scope of ETSI GS NFV 006 [i.3] however it is included in the present document with the rest of NFV-MANO interoperability for the purpose of discovery only.

Table 5.6.4.13-1: Enumeration PeerEntityEnumType

| Enumeration value | Description |
|-------------------|---|
| NFVO | The peer functional entity is an NFVO. |
| VNFM | The peer functional entity is a VNFM. |
| VIM | The peer functional entity is a VIM. |
| WIM | The peer functional entity is a WIM. |
| CISM | The peer functional entity is a CISM. |
| CIR | The peer functional entity is a CIR. |
| CCM | The peer functional entity is a CCM. |
| MDAF | The peer functional entity is a MDAF. |
| CMF | The peer functional entity is a CMF. |
| EM | The peer functional entity is an EM. |
| OSS | The peer functional entity is an OSS/BSS. |

5.7 States and state transitions of an NFV-MANO functional entity

5.7.1 Introduction

The state of an NFV-MANO functional entity application and its provided NFV-MANO service interfaces (all referred hereafter as "managed entities") shall be managed via the NFV-MANO configuration and information management interface.

The complete state of the managed entities is determined based on three aspects:

- operability;
- administration; and
- usage.

The state of an NFV-MANO service interface type of managed entity shall not affect its ability to respond to management operations. In other words, the NFV-MANO service interface managed entity shall be able to respond to NFV-MANO management operations specified in the present document even when the managed entity is in a non-operational state.

In the case of managing the state of an NFV-MANO functional entity application, two cases are possible with respect to the status of the NFV-MANO functional entity:

- A) The NFV-MANO functional entity application state is not bound (coupled) to the system's state of the NFV-MANO functional entity.
- B) The NFV-MANO functional entity application state is bound (coupled) to the system's state of the NFV-MANO functional entity.

In case of A), the NFV-MANO functional entity shall be able to respond to NFV-MANO management operations specified in the present document even when the NFV-MANO functional entity application type of managed entity is in a non-operational state, i.e. the NFV-MANO functional entity application is in the states "stopped", "restarting" or "stopping".

In case of B), the NFV-MANO functional entity will typically not be able to respond to NFV-MANO management operations specified in the present document when the NFV-MANO functional entity application type of managed entity is in a non-operational state, i.e. the NFV-MANO functional entity application is in the state "stopped", "starting", "restarting" or "stopping". In the particular case that the NFV-MANO functional entity application is "stopped" because the NFV-MANO functional entity system is "down", the NFV-MANO functional entity application may reach the operational state "started", by other means not specified in the present document.

5.7.2 States overview

5.7.2.1 Operational state

The operability of the managed entity (NFV-MANO functional entity application and NFV-MANO service interfaces) is described by the operational state, which determines whether the entity is or not "working". For a given managed entity, the operational state shall be single-valued, readable and writable (i.e. it can be modified). The operational state has four possible values:

- started: the managed entity is operational;
- starting: the managed entity is in the transition to start and become operational;
- restarting: the managed entity is in the transition to stop and start again in order to become operational;
- stopping: the managed entity is in the transition to stop and become not operational;
- stopped: the managed entity is not operational.

NOTE: Similar meanings as defined in Recommendation ITU-T X.731 [i.10] are:

- a) the "started" state in the present document is referred as "enabled", and
- b) the "stopped" state is referred as "disabled".

However, the operational state attribute in the Recommendation ITU-T X.731 [i.10] is single-valued and read-only, whereas in the present document, the operational state can be modified by using "Change NFV-MANO entity state task" and "change interface state task" resources.

The entry state for an NFV-MANO functional entity application shall be "started". The entry state for an NFV-MANO service interface shall either be "started" or "stopped". These state entry cases are represented by the transitions from the "solid circle" to "started" and "stopped" in figure 5.7.3.1-1.

In the "stopping" state, the managed entity is not expected to handle API requests.

The state of the NFV-MANO service interfaces is bound to the state of the NFV-MANO functional entity application. In particular, when the NFV-MANO functional entity application is in the "stopping" and "stopped" states, so are the NFV-MANO service interfaces of the NFV-MANO functional entity.

5.7.2.2 Administrative state

The administrative state determines the capability whether the managed entity is permitted to be used. For a given managed entity, the administrative state shall be single-valued, readable and writable (i.e. it can be modified). The administrative state has three possible values:

- unlocked: the managed entity is administratively permitted to be used. This state corresponds to the meaning as defined in Recommendation ITU-T X.731 [i.10];
- locking: the managed entity is administratively permitted to be used only for handling service on existing managed objects. This state corresponds to the meaning as defined for the state "shutting down" in the Recommendation ITU-T X.731 [i.10];

NOTE: The description of "shutting down" in the Recommendation ITU-T X.731 [i.10] indicates that "usage is administratively limited to current instances of use". Based on this description, the correspondence in between the "shutting down" and the "locking" state is established.

- locked: the managed entity is administratively prohibited to be used. This state corresponds to the meaning as defined in Recommendation ITU-T X.731 [i.10].

In the locking state, the managed entity shall not accept the activation of new managed objects handled by the corresponding NFV-MANO services of the NFV-MANO functional entity application.

EXAMPLE: Assuming the case where a VNFM is being used for managing two VNF instances, in the:

- unlocked state: the VNFM is allowed to handle requests for creating new VNF instances, or creating new subscriptions for the existing VNF instances, or creating new PM jobs for the existing VNF instances, etc.;
- locking state: the VNFM is not allowed to handle requests for creating new VNF instances, or creating other managed objects for the existing VNF instances;
- locked state: the VNFM is completely discharged from service and is not allowed to handle requests for creating new VNF instances.

END of EXAMPLE

5.7.2.3 Usage state

The usage state determines whether or not the managed entity is actively in use at a specific instant. For a given managed entity, the usage state shall be single-valued and readable. The usage state has two possible values:

- "not in use": the managed entity is not currently in use. This means that the managed entity is not holding any associated managed object;
- "in use": the managed entity is currently in use. A managed entity is "in use" when it maintains, or manages associated managed objects.

From an NFV-MANO state management perspective, the usage state cannot be operated, and it depends on the actual service that the NFV-MANO functional entity and its NFV-MANO services provide. However, by setting the administrative state into "locked", it can be controlled that a managed entity that is "not in use" does not suddenly become "in use".

EXAMPLE: Assuming the case where a VNFM supporting the NFV-MANO service of "VNF LCM", in the:

- "not in use" state: the VNFM does not have any VNF instance being managed;
- "in use" state: the VNFM has one or more VNF instances being managed.

END of EXAMPLE

5.7.3 State operations

5.7.3.1 Operational state changes and interface operations

The changes of operational state of a managed entity that shall be supported by the NFV-MANO functional entity are:

- start: to start the managed entity. If successful, the end operational state shall be "started";
- stop: to stop the managed entity and change its state to "stopping". The stop can be done gracefully or forcefully depending on the operation's input parameterization. If successful, the end operational state shall be "stopped";
- restart: to stop and start again the managed entity. The restart can be done gracefully or forcefully depending on the operation's input parameterization. If successful, the end operational state shall be "started".

Figure 5.7.3.1-1 illustrates the operational state transitions triggered by the change state operations. The entry state is represented by the transitions from the "solid circle" to "started" and "stopped" in figure 5.7.3.1-1 (see provisions in clause 5.7.2.1).

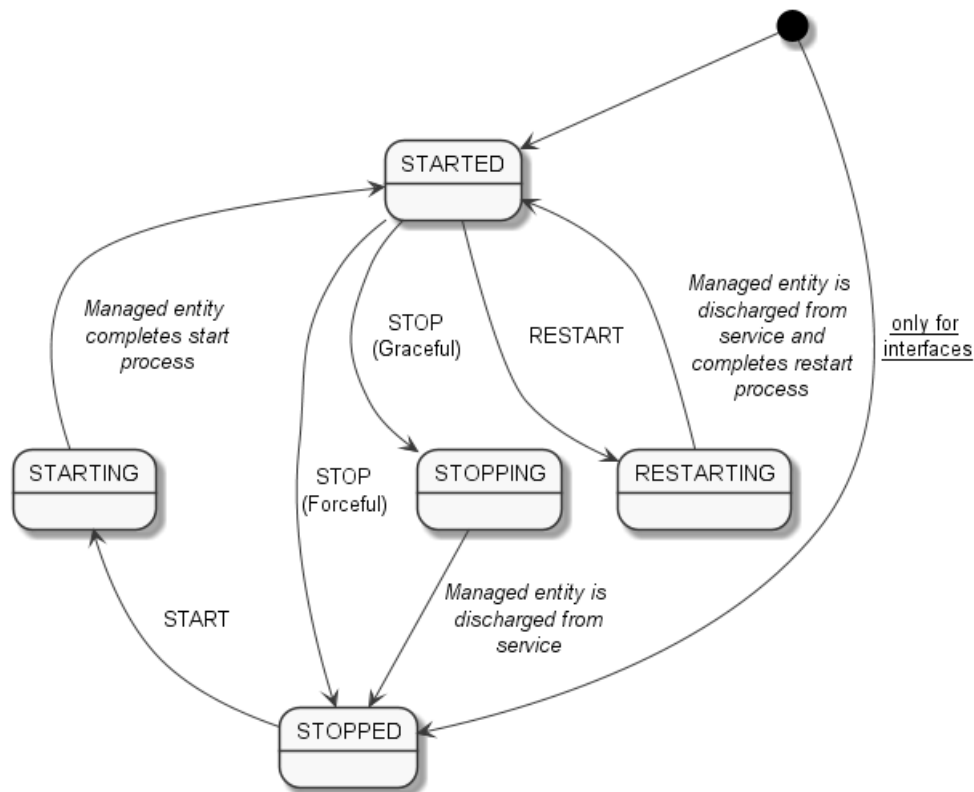


Figure 5.7.3.1-1: Operational state diagram

5.7.3.2 Administrative state changes and interface operations

The changes of administrative state of a managed entity that shall be supported by the NFV-MANO functional entity are:

- lock: to lock the managed entity. In case the managed entity is "in use", the managed entity will first transition to the state "locking". If successful, and after the managed entity is discharged from service, the end administrative state shall be "locked";
- unlock: to unlock the managed entity. If successful, the end administrative state shall be "unlocked".

Figure 5.7.3.2-1 illustrates the administrative state transitions triggered by the change state operations.

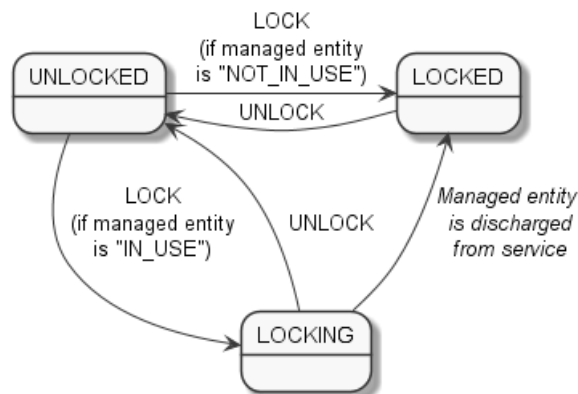


Figure 5.7.3.2-1: Administrative state diagram

6 NFV-MANO Performance Management interface

6.1 Description

This interface enables an NFV-MANO functional entity to provide to the API consumer performance information (measurement results collection and notifications) related to the NFV-MANO functional entity. Collection and reporting of performance information is controlled via PM jobs. A PM job groups details of performance collection and reporting information.

When new performance information is available, the API consumer is notified using the notification `PerformanceInformationAvailableNotification`.

The operations provided through this interface are:

- Create PM Job
- Query PM Job
- Delete PM Job
- Create Threshold
- Query Threshold
- Delete Threshold
- Notify

6.2 API version

For the NFV-MANO performance management interface as specified in the present document, the MAJOR version field shall be 2, the MINOR version field shall be 1 and the PATCH version field shall be 0 (see clause 9.1 of ETSI GS NFV-SOL 013 [4] for a definition of the version fields). Consequently, the `{apiMajorVersion}` URI variable shall be set to "v2".

NOTE: In the present document, there were no changes to the clauses defining the NFV-MANO performance management interface that are visible at interface level compared to the previous version of the present document; hence, the MAJOR/MINOR/PATCH version fields are kept the same.

6.3 Resource structure and methods

All resource URIs of the API shall use the base URI specification defined in clause 4.1 of ETSI GS NFV-SOL 013 [4].

The string "nfvmanopm" shall be used to represent `{apiName}`. All resource URIs in the clauses below are defined relative to the above base URI.

Figure 6.3-1 shows the overall resource URI structure defined for the performance management API.

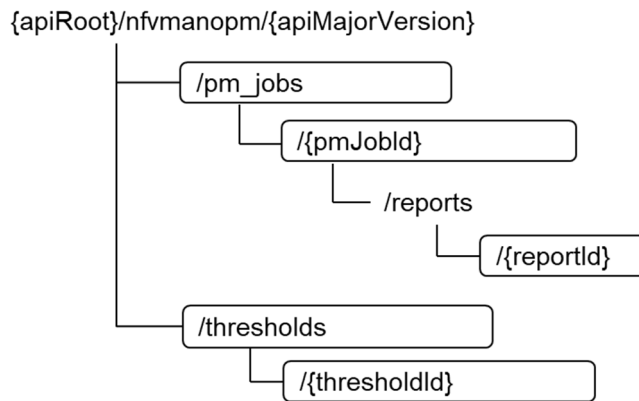


Figure 6.3-1: Resource URI structure of the NFV-MANO performance management interface

Table 6.3-1 lists the individual resources defined, and the applicable HTTP methods.

The NFV-MANO functional entity shall support responding to requests for all HTTP methods on the resources in table 6.3-1 that are marked as "M" (mandatory) in the "Cat" column. The NFV-MANO functional entity shall also support the "API versions" resources as specified in clause 9.3.2 of ETSI GS NFV-SOL 013 [4].

Table 6.3-1: Resources and methods overview of the NFV-MANO performance management interface

| Resource name | Resource URI | HTTP Method | Cat | Meaning |
|-----------------------|--|-------------|----------|--|
| PM jobs | /pm_jobs | POST | M | Create a PM job. |
| | | GET | M | Query PM jobs. |
| Individual PM job | /pm_jobs/{pmJobId} | GET | M | Read a single PM job. |
| | | PATCH | M | Update PM job callback. |
| | | DELETE | M | Delete a PM job. |
| | | GET | M | Read an individual performance report. |
| Thresholds | /thresholds | POST | M | Create a threshold. |
| | | GET | M | Query thresholds. |
| Individual threshold | /thresholds/{thresholdId} | GET | M | Query a single threshold. |
| | | PATCH | M | Update threshold callback. |
| | | DELETE | M | Delete a threshold. |
| | | POST | M | Notify about PM related events. |
| Notification endpoint | (client-defined) | GET | See note | Test the notification endpoint. |
| | | POST | See note | See note. |
| NOTE: | The NFV-MANO functional entity shall support invoking the HTTP methods defined for the "Notification endpoint" resource exposed by the API consumer. If the API consumer supports invoking the POST method on the "PM jobs" or "Thresholds" resource towards the NFV-MANO functional entity, it shall also support responding to the HTTP requests defined for the "Notification endpoint" resource. | | | |

6.4 Sequence diagrams

6.4.1 Flow of creating a PM job

This clause describes a sequence for creating a performance management jobs.

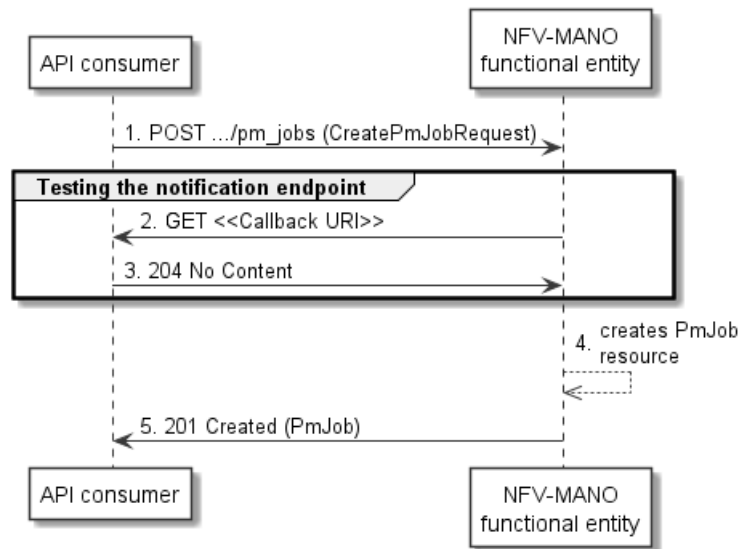


Figure 6.4.1-1: Flow of PM job creation

PM job creation, as illustrated in figure 6.4.1-1, consists of the following steps:

- 1) If the API consumer intends to create a PM job, it sends a POST request to the "PM jobs" resource, including one data structure of type "CreatePmJobRequest" in the message content.
- 2) To test the notification endpoint, the NFV-MANO functional entity sends a GET request to the notification endpoint URI.
- 3) The API consumer returns a "204 No Content" response to indicate success.
- 4) The NFV-MANO functional entity creates a PM job instance.
- 5) The NFV-MANO functional entity returns a "201 Created" response to the API consumer, and includes in the message content a representation of the PM job just created.

Error handling: In case of failure, including an invalid notification endpoint, appropriate error information is provided in the response.

6.4.1a Flow of updating the callback URI of a PM job

This clause describes a sequence for updating the callback Uri in a PM job.

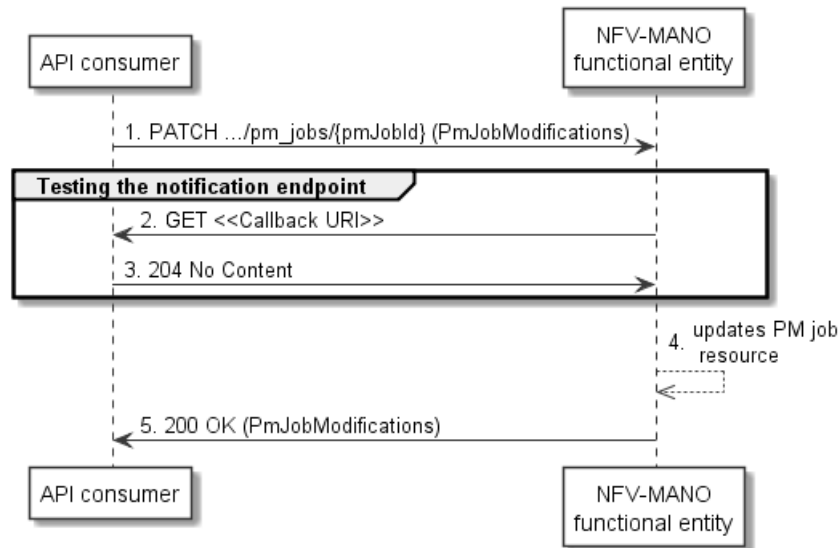


Figure 6.4.1a-1: Flow of PM job callback URI update

PM job callback URI update, as illustrated in figure 6.4.1a-1, consists of the following steps:

- 1) If the API consumer intends to update the callback URI in a PM job, it sends a PATCH request to the "Individual PM job" resource, including a data structure of type "PmJobModifications" in the message content.
- 2) To test the notification endpoint that is addressed by the new callback URI, the NFV-MANO functional entity sends a GET request to the notification endpoint URI.
- 3) The API consumer returns a "204 No Content" response to indicate success.
- 4) The NFV-MANO functional entity updates the callback URI of the "Individual PM job" resource.
- 5) The NFV-MANO functional entity returns a "200 OK" response to the API consumer and includes in the message content a data structure of type "PmJobModifications" to indicate the performed modifications.

Error handling: In case of failure, including an invalid notification endpoint, appropriate error information is provided in the response.

6.4.2 Flow of querying/reading PM jobs

This clause describes a sequence for querying/reading performance management jobs.

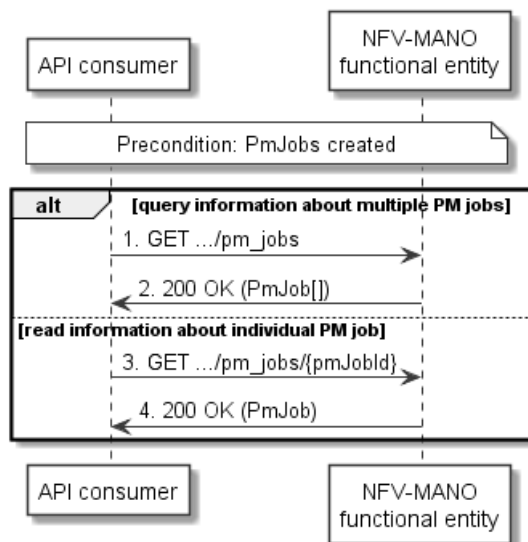


Figure 6.4.2-1: Flow of PM jobs query/read

PM jobs query/read, as illustrated in figure 6.4.2-1, consists of the following steps:

Precondition: PM jobs have been created.

- 1) If the API consumer intends to query all PM jobs, it sends a GET request to the "PM jobs" resource.
- 2) In case of step 1), the NFV-MANO functional entity returns a "200 OK" response to the API consumer, and includes zero or more data structures of type "PmJob" in the message content.
- 3) If the API consumer intends to read information about a particular PM job, it sends a GET request to the "Individual PM job" resource, addressed by the appropriate PM job identifier in its resource URI.
- 4) In case of step 3), the NFV-MANO functional entity returns a "200 OK" response to the API consumer, and includes one data structure of type "PmJob" in the message content.

Error handling: In case of failure, appropriate error information is provided in the response.

6.4.3 Flow of deleting a PM job

This clause describes a sequence for deleting a performance management job.

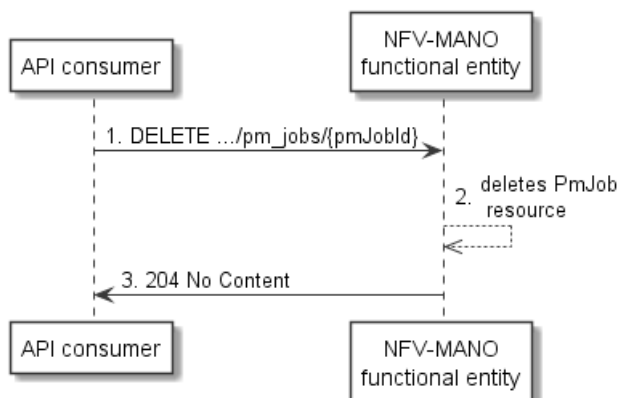


Figure 6.4.3-1: Flow of PM job deletion

PM job deletion, as illustrated in figure 6.4.3-1, consists of the following steps:

- 1) If the API consumer intends to delete a PM job, it sends a DELETE request to the "Individual PM job" resource, addressed by the appropriate PM job identifier in its resource URI.

- 2) The NFV-MANO functional entity deletes the "Individual PM job" resource.
- 3) The NFV-MANO functional entity returns a response with a "204 No Content" response code and an empty message content to the API consumer.

Error handling: In case of failure, appropriate error information is provided in the response.

6.4.4 Flow of obtaining performance reports

This clause describes a sequence for obtaining performance reports.

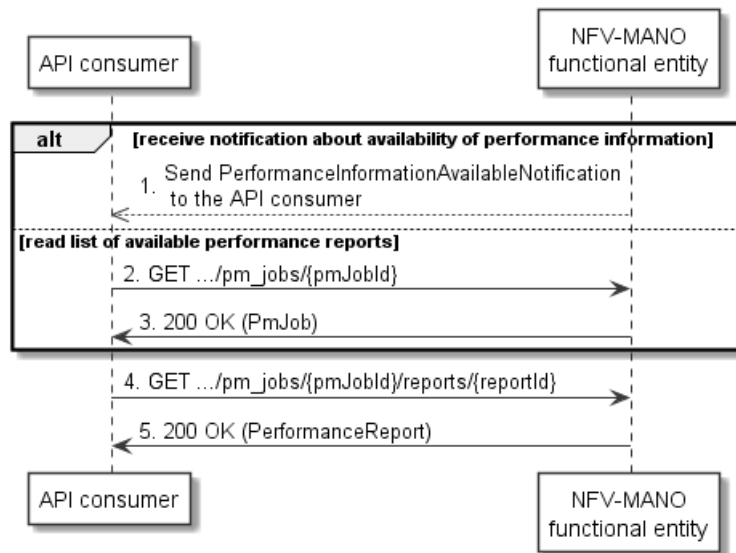


Figure 6.4.4-1: Flow of obtaining performance reports

Obtaining a performance report, as illustrated in figure 6.4.4-1, consists of the following steps:

- 1) The NFV-MANO functional entity sends to the API consumer a "PerformanceInformationAvailableNotification" (see clause 6.6.2.5) that indicates the availability of a new performance report, including a link from which the report can be obtained.
- 2) Alternatively, the API consumer sends a GET request to the "Individual PM job" resource, to obtain a representation of the PM job resource including information about performance reports that are available for this PM job, including their URIs.
- 3) In case of step 2), the NFV-MANO functional entity returns a "200 OK" response to the API consumer, and includes a data structure of type "PmJob" in the message content.
- 4) The API consumer sends to the NFV-MANO functional entity a GET request to the URI obtained either in step 1) or step 3), in order to read a performance report resource.
- 5) The NFV-MANO functional entity returns a "200 OK" response to the API consumer, and includes a data structure of type "PerformanceReport" in the message content.

6.4.5 Flow of creating a threshold

This clause describes a sequence for creating a performance management threshold.

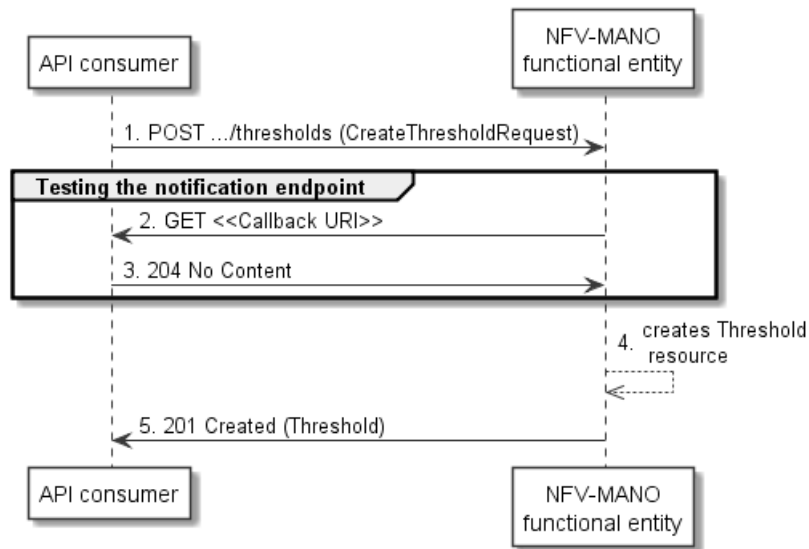


Figure 6.4.5-1: Flow of threshold creation

Threshold creation, as illustrated in figure 6.4.5-1, consists of the following steps:

- 1) If the API consumer intends to create a threshold, it sends a POST request to the "Thresholds" resource, including a data structure of type "CreateThresholdRequest" in the message content.
- 2) To test the notification endpoint, the NFV-MANO functional entity sends a GET request to the notification endpoint URI.
- 3) The API consumer returns a "204 No Content" response to indicate success.
- 4) The NFV-MANO functional entity creates a threshold resource.
- 5) The NFV-MANO functional entity returns a "201 Created" response to the API consumer, and includes in the message content a representation of the threshold just created.

Error handling: In case of failure, including an invalid notification endpoint, appropriate error information is provided in the response.

6.4.5a Flow of updating the callback URI of a threshold

This clause describes a sequence for updating the callback Uri in a performance management threshold.

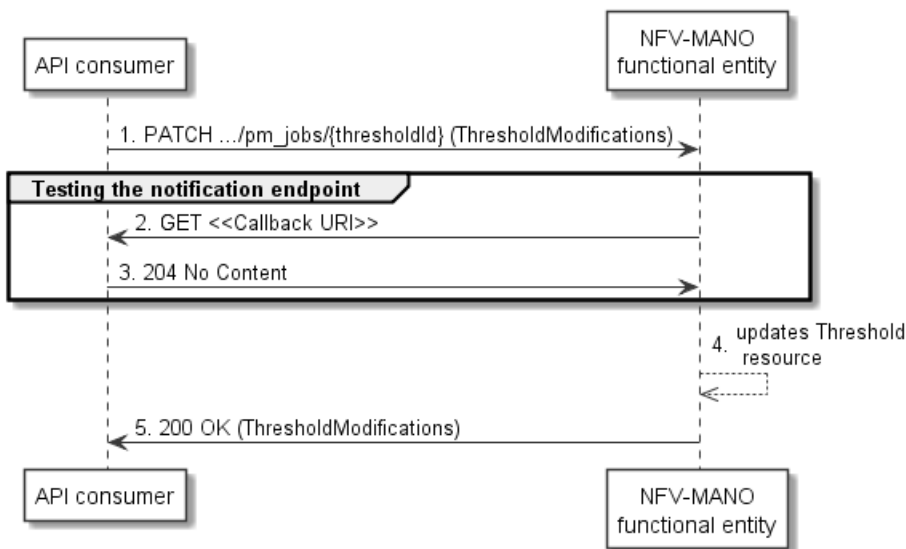


Figure 6.4.5a-1: Flow of threshold callback URI update

Threshold callback URI update, as illustrated in figure 6.4.5a-1, consists of the following steps:

- 1) If the API consumer intends to update the callback URI in a threshold, it sends a PATCH request to the "Individual threshold" resource, including a data structure of type "ThresholdModifications" in the message content.
- 2) To test the notification endpoint that is addressed by the new callback URI, the NFV-MANO functional entity sends a GET request to the notification endpoint URI.
- 3) The API consumer returns a "204 No Content" response to indicate success.
- 4) The NFV-MANO functional entity updates the callback URI of the "Individual threshold" resource.
- 5) The NFV-MANO functional entity returns a "200 OK" response to the API consumer and includes in the message content a data structure of type "ThresholdModifications" to indicate the performed modifications.

Error handling: In case of failure, including an invalid notification endpoint, appropriate error information is provided in the response.

6.4.6 Flow of querying/reading thresholds

This clause describes a sequence for querying/reading performance management thresholds.

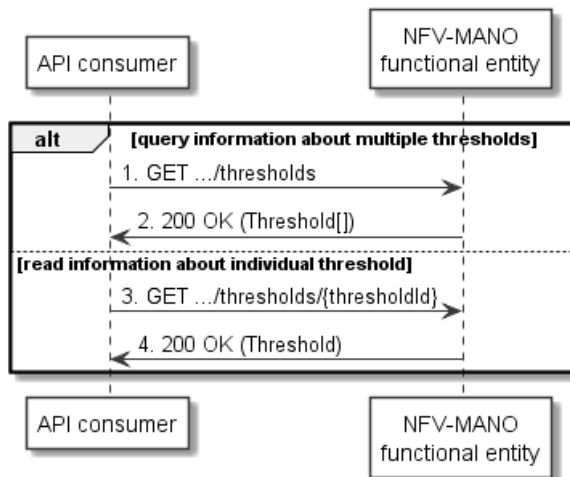


Figure 6.4.6-1: Flow of thresholds query/read

Threshold query/read, as illustrated in figure 6.4.6-1, consists of the following steps:

- 1) If the API consumer intends to query all thresholds, it sends a GET request to the "Thresholds" resource.
- 2) In case of step 1), the NFV-MANO functional entity returns a "200 OK" response to the API consumer, and includes zero or more data structures of type "Threshold" in the message content.
- 3) If the API consumer intends to read information about a particular threshold, it sends a GET request to the "Individual threshold" resource addressed by the appropriate threshold identifier in its resource URI.
- 4) In case of step 3), the NFV-MANO functional entity returns a "200 OK" response to the API consumer, and includes a data structure of type "Threshold" in the message content.

Error handling: In case of failure, appropriate error information is provided in the response.

6.4.7 Flow of deleting thresholds

This clause describes a sequence for deleting performance management thresholds.

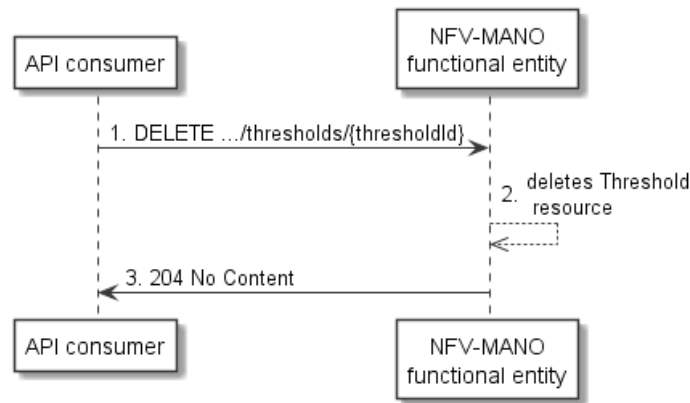


Figure 6.4.7-1: Flow of threshold deletion

Threshold deletion, as illustrated in figure 6.4.7-1, consists of the following steps:

- 1) If the API consumer intends to delete a particular threshold, it sends a DELETE request to the "Individual threshold" resource, addressed by the appropriate threshold identifier in its resource URI.
- 2) The NFV-MANO functional entity deletes the "Individual threshold" resource.
- 3) The NFV-MANO functional entity returns a "204 No Content" response code to the API consumer. The response body will be empty.

Error handling: In case of failure, appropriate error information is provided in the response.

6.4.8 Void

6.4.9 Flow of sending notifications

This clause describes the procedure for sending notifications related to NFV-MANO performance management.

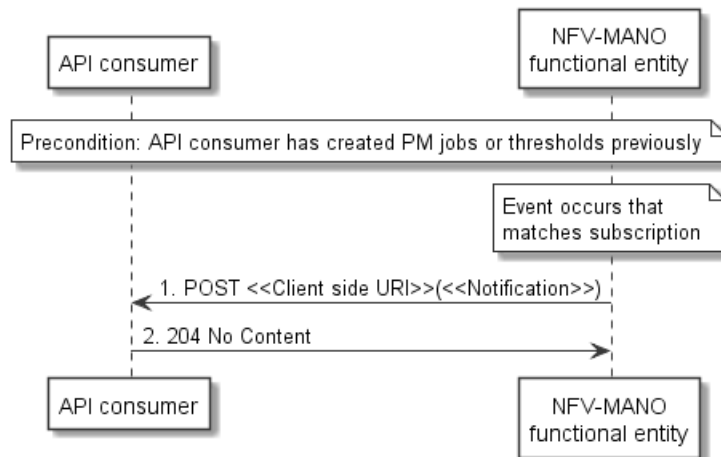


Figure 6.4.9-1: Flow of sending notifications

The procedure consists of the following steps as illustrated in figure 6.4.9-1:

Precondition: The API consumer has previously created thresholds and or PM jobs which trigger notifications related to NFV-MANO functional entity performance management.

- 1) If an event occurs that indicates a threshold crossing or availability of performance information in a PM job, the NFV-MANO functional entity generates a notification that includes information about the event, and sends it in the body of a POST request to the URI which the API consumer has registered as part of creating the threshold or PM job. The variable <<Notification>> in the flow is a placeholder for the different types of notifications that can be sent by this API.
- 2) The API consumer acknowledges the successful delivery of the notification by returning a "204 No Content" response.

Error handling: If the NFV-MANO functional entity does not receive the "204 No Content" response from the API consumer, it can retry sending the notification.

6.5 Resources

6.5.1 Introduction

This clause defines all the resources and methods provided by the NFV-MANO performance management interface.

6.5.2 Resource: API versions

The "API versions" resources as defined in clause 9.3.3 of ETSI GS NFV-SOL 013 [4] are part of the NFV-MANO performance management interface.

6.5.3 Resource: PM jobs

6.5.3.1 Description

This resource represents PM jobs. The client can use this resource to create and query PM jobs.

6.5.3.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanopm/{apiMajorVersion}/pm_jobs

This resource shall support the resource URI variables defined in table 6.5.3.2-1.

Table 6.5.3.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 6.2. |

6.5.3.3 Resource methods

6.5.3.3.1 POST

The POST method creates a PM job.

This method shall follow the provisions specified in tables 6.5.3.3.1-1 and 6.5.3.3.1-2 for URI query parameters, request and response data structures, and response codes.

As the result of successfully executing this method, a new "Individual PM job" resource as defined in clause 6.5.4 shall have been created.

Table 6.5.3.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 6.5.3.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|--------------------|-----------------------|---------------------------|---|
| | CreatePmJobRequest | 1 | PM job creation request. | |
| Response body | | | Response Codes | Description |
| | PmJob | 1 | 201 Created | <p>Shall be returned when the PM job has been created successfully.</p> <p>The response body shall contain a representation of the created "Individual PM job" resource, as defined in clause 6.6.2.7.</p> <p>The HTTP response shall include a "Location" HTTP header that points to the created "Individual PM job" resource.</p> |
| | ProblemDetails | 1 | 422 Unprocessable Content | <p>Shall be returned upon the following error: The content type of the message content is supported and the message content of a request contains syntactically correct data but the data cannot be processed.</p> <p>The general cause for this error and its handling is specified in clause 6.4 of ETSI GS NFV-SOL 013 [4], including rules for the presence of the response body.</p> <p>Specifically in case of this resource, the response code 422 shall also be returned if the API producer has tested the Notification endpoint as described in clause 6.5.10.3.2 and the test has failed.</p> <p>In this case, the "detail" attribute in the "ProblemDetails" structure shall convey more information about the error.</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

6.5.3.3.2 GET

The client can use this method to retrieve information about PM jobs.

This method shall follow the provisions specified in tables 6.5.3.3.2-1 and 6.5.3.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 6.5.3.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|------------------------|-------------|--|
| filter | 0..1 | Attribute-based filtering expression according to clause 5.2 of ETSI GS NFV-SOL 013 [4]. The NFV-MANO functional entity shall support receiving this parameter as part of the URI query string. The API consumer may supply this parameter. All attribute names that appear in the PmJob and in data types referenced from it shall be supported by the NFV-MANO functional entity in the filter expression. |
| all_fields | 0..1 | Include all complex attributes in the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity shall support this parameter. |
| fields | 0..1 | Complex attributes to be included into the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity should support this parameter. |
| exclude_fields | 0..1 | Complex attributes to be excluded from the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity should support this parameter. |
| exclude_default | 0..1 | Indicates to exclude the following complex attributes from the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity shall support this parameter. The following attributes shall be excluded from the PmJob structure in the response body if this parameter is provided, or none of the parameters "all_fields", "fields", "exclude_fields", "exclude_default" are provided: <ul style="list-style-type: none"> reports. |
| nextpage_opaque_marker | 0..1 | Marker to obtain the next page of a paged response. Shall be supported by the NFV-MANO functional entity if the NFV-MANO functional entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource. |

Table 6.5.3.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-----------------------|-------------|--|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | PmJob | 0..N | 200 OK | <p>Shall be returned when information about zero or more PM jobs has been queried successfully.</p> <p>The response body shall contain in an array the representations of zero or more PM jobs, as defined in clause 6.6.2.7.</p> <p>If the "filter" URI parameter or one of the "all_fields", "fields" (if supported), "exclude_fields" (if supported) or "exclude_default" URI parameters was supplied in the request, the data in the response body shall have been transformed according to the rules specified in clauses 5.2.2 and 5.3.2 of ETSI GS NFV-SOL 013 [4], respectively.</p> <p>If the NFV-MANO functional entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, inclusion of the Link HTTP header in this response shall follow the provisions in clause 5.4.2.3 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute-based filtering expression.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute selector.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Response too big.</p> <p>If the NFV-MANO functional entity supports alternative 1 (error) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, this error response shall follow the provisions in clause 5.4.2.2 of ETSI GS NFV-SOL 013 [4].</p> |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

6.5.3.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.3.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.3.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.4 Resource: Individual PM job

6.5.4.1 Description

This resource represents an individual PM job. The client can use this resource to delete and read the underlying PM job.

6.5.4.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanopm/{apiMajorVersion}/pm_jobs/{pmJobId}

This resource shall support the resource URI variables defined in table 6.5.4.2-1.

Table 6.5.4.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|---|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 6.2. |
| pmJobId | Identifier of the PM job. See note. |
| NOTE: | This identifier can be retrieved from the resource referenced by the "Location" HTTP header in the response to a POST request creating a new PM job resource. It can also be retrieved from the "id" attribute in the message content of that response. |

6.5.4.3 Resource methods

6.5.4.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.4.3.2 GET

The client can use this method for reading an individual PM job.

This method shall follow the provisions specified in tables 6.5.4.3.2-1 and 6.5.4.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 6.5.4.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 6.5.4.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | PmJob | 1 | 200 OK | Shall be returned when information about an individual PM job has been read successfully. The response body shall contain a representation of the "Individual PM job" resource, as defined in clause 6.6.2.7. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

6.5.4.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.4.3.4 PATCH

This method allows to modify an "individual PM job" resource.

This method shall follow the provisions specified in tables 6.5.4.3.4-1 and 6.5.4.3.4-2 for URI query parameters, request and response data structures, and response codes.

Table 6.5.4.3.4-1: URI query parameters supported by the PATCH method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 6.5.4.3.4-2: Details of the PATCH request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|--------------------|-----------------------|---|--|
| | PmJobModifications | 1 | Parameters for the PM job modification. The Content-Type header shall be set to "application/merge-patch+json" according to IETF RFC 7396 [3]. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | PmJobModifications | 1 | 200 OK | Shall be returned when the request has been processed successfully. The response body shall contain a data structure of type "PmJobModifications". |
| | ProblemDetails | 0..1 | 412 Precondition failed | Shall be returned upon the following error: A precondition given in an HTTP request header is not fulfilled. Typically, this is due to an ETag mismatch, indicating that the resource was modified by another entity. The response body should contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error. |
| | ProblemDetails | 1 | 422 Unprocessable Content | Shall be returned upon the following error: The content type of the message content is supported and the message content of a request contains syntactically correct data but the data cannot be processed. The general cause for this error and its handling is specified in clause 6.4 of ETSI GS NFV-SOL 013 [4], including rules for the presence of the response body. Specifically in case of this resource, the response code 422 shall also be returned if the API producer has tested the Notification endpoint as described in clause 6.5.10.3.2 and the test has failed. In this case, the "detail" attribute in the "ProblemDetails" structure shall convey more information about the error. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

6.5.4.3.5 DELETE

This method terminates an individual PM job.

This method shall follow the provisions specified in tables 6.5.4.3.5-1 and 6.5.4.3.5-2 for URI query parameters, request and response data structures, and response codes.

As the result of successfully executing this method, the "Individual PM job" resource shall not exist any longer.

Table 6.5.4.3.5-1: URI query parameters supported by the DELETE method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 6.5.4.3.5-2: Details of the DELETE request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | Shall be returned when the PM job has been deleted successfully. The response body shall be empty. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

6.5.5 Resource: Individual performance report

6.5.5.1 Description

This resource represents an individual performance report that was collected by a PM job. The client can use this resource to read the performance report. The URI of this report can be obtained from a PerformanceInformationAvailableNotification (see clause 6.6.2.5) or from the representation of the "Individual PM job" resource.

It is determined by means outside the scope of the present document, such as configuration or policy, how long an individual performance report is available.

6.5.5.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanopm/{apiMajorVersion}/pm_jobs/{pmJobId}/reports/{reportId}

This resource shall support the resource URI variables defined in table 6.5.5.2-1.

Table 6.5.5.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 6.2. |
| pmJobId | Identifier of the PM job. |
| reportId | Identifier of the performance report. |

6.5.5.3 Resource methods

6.5.5.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.5.3.2 GET

The client can use this method for reading an individual performance report.

This method shall follow the provisions specified in tables 6.5.5.3.2-1 and 6.5.5.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 6.5.5.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 6.5.5.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|-------------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | PerformanceReport | 1 | 200 OK | Shall be returned when information of an individual performance report has been read successfully. The response body shall contain a representation of the "Individual performance report" resource, as defined in clause 6.6.2.10. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

6.5.5.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.5.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.5.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.6 Resource: Thresholds

6.5.6.1 Description

This resource represents thresholds. The client can use this resource to create and query thresholds.

6.5.6.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanopm/{apiMajorVersion}/thresholds

This resource shall support the resource URI variables defined in table 6.5.6.2-1.

Table 6.5.6.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 6.2. |

6.5.6.3 Resource methods

6.5.6.3.1 POST

The POST method can be used by the client to create a threshold.

This method shall follow the provisions specified in tables 6.5.6.3.1-1 and 6.5.6.3.1-2 for URI query parameters, request and response data structures, and response codes.

As the result of successfully executing this method, a new "Individual threshold" resource as defined in clause 6.5.7 shall have been created.

Table 6.5.6.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 6.5.6.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|------------------------|-----------------------|---|---|
| | CreateThresholdRequest | 1 | Request parameters to create a threshold. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | Threshold | 1 | 201 Created | <p>Shall be returned when a threshold has been created successfully.</p> <p>The response body shall contain a representation of the created "Individual threshold" resource, as defined in clause 6.6.2.9.</p> <p>The HTTP response shall include a "Location" HTTP header that contains the resource URI of the created "Individual threshold" resource.</p> |
| | ProblemDetails | 1 | 422 Unprocessable Content | <p>Shall be returned upon the following error: The content type of the message content is supported and the message content of a request contains syntactically correct data but the data cannot be processed.</p> <p>The general cause for this error and its handling is specified in clause 6.4 of ETSI GS NFV-SOL 013 [4], including rules for the presence of the response body.</p> <p>Specifically in case of this resource, the response code 422 shall also be returned if the API producer has tested the Notification endpoint as described in clause 6.5.10.3.2 and the test has failed.</p> <p>In this case, the "detail" attribute in the "ProblemDetails" structure shall convey more information about the error.</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

6.5.6.3.2 GET

The client can use this method to query information about thresholds.

This method shall follow the provisions specified in tables 6.5.6.3.2-1 and 6.5.6.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 6.5.6.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|------------------------|-------------|---|
| filter | 0..1 | <p>Attribute-based filtering expression according to clause 5.2 of ETSI GS NFV-SOL 013 [4].</p> <p>The NFV-MANO functional entity shall support receiving this parameter as part of the URI query string. The API consumer may supply this parameter.</p> <p>All attribute names that appear in the Threshold data type and in data types referenced from it shall be supported by the NFV-MANO functional entity in the filter expression.</p> |
| nextpage_opaque_marker | 0..1 | Marker to obtain the next page of a paged response. Shall be supported by the NFV-MANO functional entity if the NFV-MANO functional entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource. |

NOTE: There are no attribute selectors defined for this resource as the threshold attributes with cardinality 0..1 or 0..N are not structurally complex in nature.

Table 6.5.6.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|-----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | Threshold | 0..N | 200 OK | <p>Shall be returned when information about zero or more thresholds has been queried successfully.</p> <p>The response body shall contain in an array the representations of zero or more thresholds, as defined in clause 6.6.2.9.</p> <p>If the "filter" URI parameter was supplied in the request, the data in the response body shall have been transformed according to the rules specified in clause 5.2.2 of ETSI GS NFV-SOL 013 [4].</p> <p>If the NFV-MANO functional entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, inclusion of the Link HTTP header in this response shall follow the provisions in clause 5.4.2.3 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute-based filtering expression.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Response too big.</p> <p>If the NFV-MANO functional entity supports alternative 1 (error) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, this error response shall follow the provisions in clause 5.4.2.2 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

6.5.6.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.6.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.6.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.7 Resource: Individual threshold

6.5.7.1 Description

This resource represents an individual threshold.

6.5.7.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanopm/{apiMajorVersion}/thresholds/{thresholdId}

This resource shall support the resource URI variables defined in table 6.5.7.2-1.

Table 6.5.7.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 6.2. |
| thresholdId | Identifier of the threshold. See note. |
| NOTE: | This identifier can be retrieved from the resource referenced by the "Location" HTTP header in the response to a POST request creating a new threshold resource. It can also be retrieved from the "id" attribute in the message content of that response. |

6.5.7.3 Resource methods

6.5.7.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.7.3.2 GET

The client can use this method for reading an individual threshold.

This method shall follow the provisions specified in tables 6.5.7.3.2-1 and 6.5.7.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 6.5.7.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 6.5.7.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | Threshold | 1 | 200 OK | Shall be returned when information about an individual threshold has been read successfully. The response body shall contain a representation of the threshold, as defined in clause 6.6.2.9. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

6.5.7.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.7.3.4 PATCH

This method allows to modify an "Individual threshold" resource.

This method shall follow the provisions specified in tables 6.5.7.3.4-1 and 6.5.7.3.4-2 for URI query parameters, request and response data structures, and response codes.

Table 6.5.7.3.4-1: URI query parameters supported by the PATCH method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 6.5.7.3.4-2: Details of the PATCH request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|------------------------|-----------------------|--|--|
| | ThresholdModifications | 1 | Parameters for the threshold modification. The Content-Type header shall be set to "application/merge-patch+json" according to IETF RFC 7396 [3]. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | ThresholdModifications | 1 | 200 OK | Shall be returned when the request has been processed successfully. The response body shall contain a data structure of type "ThresholdModifications". |
| | ProblemDetails | 0..1 | 412 Precondition failed | Shall be returned upon the following error: A precondition given in an HTTP request header is not fulfilled. Typically, this is due to an ETag mismatch, indicating that the resource was modified by another entity. The response body should contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error. |
| | ProblemDetails | 1 | 422 Unprocessable Content | Shall be returned upon the following error: The content type of the message content is supported and the message content of a request contains syntactically correct data but the data cannot be processed. The general cause for this error and its handling is specified in clause 6.4 of ETSI GS NFV-SOL 013 [4], including rules for the presence of the response body. Specifically in case of this resource, the response code 422 shall also be returned if the API producer has tested the Notification endpoint as described in clause 6.5.10.3.2 and the test has failed. In this case, the "detail" attribute in the "ProblemDetails" structure shall convey more information about the error. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

6.5.7.3.5 DELETE

This method allows to delete a threshold.

This method shall follow the provisions specified in tables 6.5.7.3.5-1 and 6.5.7.3.5-2 for URI query parameters, request and response data structures, and response codes.

As the result of successfully executing this method, the "Individual threshold" resource shall not exist any longer.

Table 6.5.7.3.5-1: URI query parameters supported by the DELETE method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 6.5.7.3.5-2: Details of the DELETE request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | <p>Shall be returned when the threshold has been deleted successfully.</p> <p>The response body shall be empty.</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

6.5.8 Void

6.5.9 Void

6.5.10 Resource: Notification endpoint

6.5.10.1 Description

This resource represents a notification endpoint for NFV-MANO performance management.

The API producer can use this resource to send notifications related to performance management events to an API consumer, which has provided the URI of this resource during the PM job or threshold creation process.

6.5.10.2 Resource definition

The resource URI is provided by the client when creating the subscription.

This resource shall support the resource URI variables defined in table 6.5.10.2-1.

Table 6.5.10.2-1: Resource URI variables for this resource

| Name | Definition |
|------|------------|
| n/a | |

6.5.10.3 Resource methods

6.5.10.3.1 POST

The POST method delivers a notification regarding a performance management event from the API producer to an API consumer. The API consumer shall have previously created an "Individual PM job resource" or "Individual threshold resource".

This method shall follow the provisions specified in tables 6.5.10.3.1-1 and 6.5.10.3.1-2 for URI query parameters, request and response data structures, and response codes.

Table 6.5.10.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Each notification request body shall include exactly one of the alternatives defined in table 6.5.10.3.1-2.

Table 6.5.10.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|------------------------------|---|---------------------------------------|--|--|
| | PerformanceInformationAvailableNotification | 1 | Notification about performance information availability | |
| ThresholdCrossedNotification | 1 | Notification about threshold crossing | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | Shall be returned when the notification has been delivered successfully. |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

6.5.10.3.2 GET

The GET method allows the server to test the notification endpoint that is provided by the client, e.g. during creation of the PM job or threshold.

This method shall follow the provisions specified in tables 6.5.10.3.2-1 and 6.5.10.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 6.5.10.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 6.5.10.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-----------------------|-------------|--|---|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | Shall be returned to indicate that the notification endpoint has been tested successfully. The response body shall be empty. |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

6.5.10.3.3 PUT

This method is not supported. When this method is requested on this resource, the API consumer shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.10.3.4 PATCH

This method is not supported. When this method is requested on this resource, the API consumer shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.5.10.3.5 DELETE

This method is not supported. When this method is requested on this resource, the API consumer shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

6.6 Data model

6.6.1 Introduction

This clause defines the request and response data structures of the NFV-MANO performance management interface. If a request or response contains attributes not defined in the present document, a receiving functional block that does not understand these attributes shall not treat their presence as an error and may choose to ignore them.

6.6.2 Resource and notification data types

6.6.2.1 Introduction

This clause defines the data structures to be used in resource representations and notifications.

6.6.2.2 Void

6.6.2.3 Void

6.6.2.4 Type: ThresholdCrossedNotification

This type represents a notification that is sent when a threshold has been crossed. It shall comply with the provisions defined in table 6.6.2.4-1.

NOTE: The timing of sending this notification is determined by the capability of the producing entity to evaluate the threshold crossing condition.

The notification shall be triggered by the NFV-MANO functional entity when a threshold has been crossed.

Table 6.6.2.4-1: Definition of the ThresholdCrossedNotification data type

| Attribute name | Data type | Cardinality | Description |
|-------------------|-----------------------|-------------|---|
| id | Identifier | 1 | Identifier of this notification. If a notification is sent multiple times due to multiple subscriptions, the "id" attribute of all these notifications shall have the same value. |
| notificationType | String | 1 | Discriminator for the different notification types. Shall be set to "ThresholdCrossedNotification" for this notification type. |
| timeStamp | DateTime | 1 | Date and time of the generation of the notification. |
| thresholdId | Identifier | 1 | Identifier of the threshold which has been crossed. |
| crossingDirection | CrossingDirectionType | 1 | An indication of whether the threshold was crossed in upward or downward direction. |

| Attribute name | Data type | Cardinality | Description |
|---------------------|------------------------|-------------|--|
| objectType | String | 1 | Type of measured object. The applicable measured object type for a measurement is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1]. |
| objectInstanceid | Identifier | 1 | Identifier of the measured object instance. This attribute shall contain the identifier of the instance of the measure object according to their type. See also definitions in clause 8.2 of ETSI GS NFV-IFA 031 [1]. |
| subObjectInstanceid | IdentifierInManoEntity | 0..1 | Identifier of the sub-object of the measured object to which the measurement applies. Shall be present if this is required in clause 8.2 of ETSI GS NFV-IFA 031 [1] for the related measured object type. Shall be absent otherwise. |
| performanceMetric | String | 1 | Performance metric associated with the threshold. This attribute shall contain the related "Measurement Name" value as defined in clause 8.4 of ETSI GS NFV-IFA 031 [1]. |
| performanceValue | (any type) | 1 | Value of the metric that resulted in threshold crossing. The type of this attribute shall correspond to the related "Measurement Unit" as defined in clause 8.4 of ETSI GS NFV-IFA 031 [1]. |
| context | KeyValuePairs | 0..1 | Measurement context information related to the measured value. The set of applicable keys is defined per measurement in clause 8.4 of ETSI GS NFV-IFA 031 [1]. |
| _links | Structure (inlined) | 1 | Links to resources related to this notification. |
| >objectInstance | NotificationLink | 0..1 | Link to the resource representing the measured object instance to which the notified change applies. Shall be present if the measured object instance information is accessible as a resource. |
| >threshold | NotificationLink | 1 | Link to the resource that represents the threshold that was crossed. |

6.6.2.5 Type: PerformanceInformationAvailableNotification

This notification informs the receiver that performance information is available. It shall comply with the provisions defined in table 6.6.2.5-1.

The notification shall be triggered by the NFV-MANO functional entity when new performance information collected by a PM job is available. The periodicity of triggering this notification is influenced by the "reportingPeriod" attribute in the "PmJobCriteria" data structure as defined in clause 6.6.3.3.

Table 6.6.2.5-1: Definition of the PerformanceInformationAvailableNotification data type

| Attribute name | Data type | Cardinality | Description |
|------------------|------------|-------------|---|
| id | Identifier | 1 | Identifier of this notification. If a notification is sent multiple times due to multiple subscriptions, the "id" attribute of all these notifications shall have the same value. |
| notificationType | String | 1 | Discriminator for the different notification types. Shall be set to "PerformanceInformationAvailableNotification" for this notification type. |
| timeStamp | DateTime | 1 | Date and time of the generation of the notification. |
| pmJobId | Identifier | 1 | Identifier of the PM job for which performance information is available. |
| objectType | String | 1 | Type of measured object. The applicable measured object type for a measurement is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1]. |

| Attribute name | Data type | Cardinality | Description |
|----------------------|------------------------|-------------|--|
| objectInstanceIcd | Identifier | 1 | Identifier of the measured object instance. This attribute shall contain the identifier of the instance of the measure object according to their type. See also definitions in clause 8.2 of ETSI GS NFV-IFA 031 [1]. |
| subObjectInstanceIcd | IdentifierInManoEntity | 0..1 | Identifier of the sub-object of the measured object instance for which the measurements have been taken. Shall be present if the related PM job has been set up to measure a sub-object instance of the measured object instance and a sub-object is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1] for the related measured object type. Shall be absent otherwise. |
| _links | Structure (inlined) | 1 | Links to resources related to this notification. |
| >objectInstance | NotificationLink | 0..1 | Link to the resource representing the measured object instance to which the notification applies. Shall be present if the measured object instance information is accessible as a resource. |
| >pmJob | NotificationLink | 1 | Link to the resource that represents the PM job for which performance information is available. |
| >performanceReport | NotificationLink | 1 | Link from which the available performance information of data type "PerformanceReport" (see clause 6.6.2.10) can be obtained. This link should point to an "Individual performance report" resource as defined in clause 6.5.5. |

6.6.2.6 Type: CreatePmJobRequest

This type represents a request to create a PM job. It shall comply with the provisions defined in table 6.6.2.6-1.

Table 6.6.2.6-1: Definition of the CreatePmJobRequest data type

| Attribute name | Data type | Cardinality | Description |
|-----------------------|------------------------|-------------|--|
| objectType | String | 1 | Type of measured object. The applicable measured object type for a measurement is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1]. |
| objectInstanceIcds | Identifier | 1..N | Identifiers of the measured object instance for which performance information is requested to be collected. This attribute shall contain the identifier of the instance of the measure object according to their type. See also definitions in clause 8.2 of ETSI GS NFV-IFA 031 [1]. If more than one identifier is provided, values shall all refer to measured object instances of the same type, for which the same criteria is then applicable. |
| subObjectInstanceIcds | IdentifierInManoEntity | 0..N | Identifiers of the sub-object instances of the measured object instance for which performance information is requested to be collected. May be present if a sub-object is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1] for the related measured object type. If this attribute is present, the cardinality of the "objectInstanceIcds" attribute shall be 1. If this attribute is absent and a sub-object is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1] for the related measured object type, measurements will be taken for all sub-object instances of the measured object instance. |
| criteria | PmJobCriteria | 1 | Criteria of the collection of performance information. |
| callbackUri | Uri | 1 | The URI of the endpoint to send the notification to. |

| Attribute name | Data type | Cardinality | Description |
|----------------|----------------------------|-------------|---|
| authentication | SubscriptionAuthentication | 0..1 | Authentication parameters to configure the use of Authorization when sending notifications corresponding to this PM job, as defined in clause 8.3.4 of ETSI GS NFV-SOL 013 [4]. This attribute shall only be present if the API consumer requires authorization of notifications. |

6.6.2.7 Type: PmJob

This type represents a PM job. It shall comply with the provisions defined in table 6.6.2.7-1.

Table 6.6.2.7-1: Definition of the PmJob data type

| Attribute name | Data type | Cardinality | Description |
|----------------------|------------------------|-------------|---|
| id | Identifier | 1 | Identifier of this PM job. |
| objectType | String | 1 | Type of measured object. The applicable measured object type for a measurement is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1]. |
| objectInstanceIds | Identifier | 1..N | Identifiers of the measured object instance for which performance information is collected. This attribute shall contain the identifier of the instance of the measure object according to their type. See also definitions in clause 8.2 of ETSI GS NFV-IFA 031 [1]. |
| subObjectInstanceIds | IdentifierInManoEntity | 0..N | Identifiers of the sub-object instances of the measured object instance for which performance information is requested to be collected. May be present if a sub-object is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1] for the related measured object type. If this attribute is present, the cardinality of the "objectInstanceIds" attribute shall be 1. If this attribute is absent and a sub-object is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1] for the related measured object type, measurements will be taken for all sub-object instances of the measured object instance. |
| criteria | PmJobCriteria | 1 | Criteria of the collection of performance information. |
| callbackUri | Uri | 1 | The URI of the endpoint to send the notification to. |
| reports | Structure (inlined) | 0..N | Information about available reports collected by this PM job. |
| >href | Uri | 1 | The Uri where the report can be obtained. |
| >readyTime | DateTime | 1 | The time when the report was made available. |
| >expiryTime | DateTime | 0..1 | The time when the report will expire. |
| >fileSize | UnsigendInt | 0..1 | The size of the report file in bytes, if known. |
| _links | Structure (inlined) | 1 | Links for this resource. |
| >self | Link | 1 | URI of this resource. |
| >objects | Link | 0..N | Links to resources representing the measured object instances for which performance information is collected. Shall be present if the measured object instance information is accessible as a resource. |

6.6.2.8 Type: CreateThresholdRequest

This type represents a request to create a threshold. It shall comply with the provisions defined in table 6.6.2.8-1.

Table 6.6.2.8-1: Definition of the CreateThresholdRequest data type

| Attribute name | Data type | Cardinality | Description |
|----------------------|----------------------------|-------------|--|
| objectType | String | 1 | Type of measured object. The applicable measured object type for a measurement is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1]. |
| objectInstanceld | Identifier | 1 | Identifier of the measured object instance associated with this threshold. This attribute shall contain the identifier of the instance of the measure object according to their type. See also definitions in clause 8.2 of ETSI GS NFV-IFA 031 [1]. |
| subObjectInstancelds | IdentifierInManoEntity | 0..N | Identifiers of the sub-object instances of the measured object instance associated with this threshold. May be present if a sub-object is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1] for the related measured object type. If this attribute is absent and a sub-object is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1] for the related measured object type, thresholds will be set for all sub-object instances of the measured object instance. |
| criteria | ThresholdCriteria | 1 | Criteria that define this threshold. |
| callbackUri | Uri | 1 | The URI of the endpoint to send the notification to. |
| authentication | SubscriptionAuthentication | 0..1 | Authentication parameters to configure the use of Authorization when sending notifications corresponding to this threshold, as defined in clause 8.3.4 of ETSI GS NFV-SOL 013 [4]. This attribute shall only be present if the API consumer requires authorization of notifications. |

6.6.2.9 Type: Threshold

This type represents a threshold. It shall comply with the provisions defined in table 6.6.2.9-1.

Table 6.6.2.9-1: Definition of the Threshold data type

| Attribute name | Data type | Cardinality | Description |
|------------------|------------|-------------|---|
| id | Identifier | 1 | Identifier of this threshold resource. |
| objectType | String | 1 | Type of measured object. The applicable measured object type for a measurement is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1]. |
| objectInstanceld | Identifier | 1 | Identifier of the measured object instance associated with the threshold. This attribute shall contain the identifier of the instance of the measure object according to their type. See also definitions in clause 8.2 of ETSI GS NFV-IFA 031 [1]. |

| Attribute name | Data type | Cardinality | Description |
|----------------------|------------------------|-------------|--|
| subObjectInstanceIds | IdentifierInManoEntity | 0..N | Identifiers of the sub-object instances of the measured object instance associated with this threshold. May be present if a sub-object is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1] for the related measured object type. If this attribute is absent and a sub-object is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1] for the related measured object type, thresholds are set for all sub-object instances of the measured object instance. |
| criteria | ThresholdCriteria | 1 | Criteria that define this threshold. |
| callbackUri | Uri | 1 | The URI of the endpoint to send the notification to. |
| _links | Structure (inlined) | 1 | Links for this resource. |
| >self | Link | 1 | URI of this resource. |
| >object | Link | 0..1 | Link to a resource representing the measured object instance for which performance information is collected. Shall be present if the measured object instance information is accessible as a resource. |

6.6.2.10 Type: PerformanceReport

This type defines the format of a performance report provided by the NFV-MANO functional entity to the API consumer as a result of collecting performance information as part of a PM job. The type shall comply with the provisions defined in table 6.6.2.10-1.

Table 6.6.2.10-1: Definition of the PerformanceReport data type

| Attribute name | Data type | Cardinality | Description |
|----------------------|----------------------------|-------------|---|
| entries | Structure (inlined) | 1..N | List of performance information entries. Each performance report entry is for a given metric of a given object (i.e. measured object instance) corresponding to the related measured object types, but can include multiple collected values. |
| >objectType | String | 1 | Type of measured object. The applicable measured object type for a measurement is defined in clause 8.2 of ETSI GS NFV-IFA 031 [1]. |
| >objectInstanceid | ManoManagedObjectReference | 1 | The object instance (i.e. measured object instance) for which the performance metric is reported. This attribute shall contain the identifier of the instance of the measure object according to their type. See also definitions in clause 8.2 of ETSI GS NFV-IFA 031 [1]. |
| >subObjectInstanceid | IdentifierInManoEntity | 0..1 | Identifier of the sub-object instance of the measured object instance for which the performance metric is reported. Shall be present if this is required in clause 8.2 of ETSI GS NFV-IFA 031 [1] for the related measured object type. |
| >performanceMetric | String | 1 | Name of the metric collected. This attribute shall contain the related "Measurement Name" value as defined in clause 8.4 of ETSI GS NFV-IFA 031 [1]. |
| >performanceValues | Structure (inlined) | 1..N | List of performance values with associated timestamp. |
| >>timeStamp | DateTime | 1 | Time stamp indicating when the data was collected. |

| Attribute name | Data type | Cardinality | Description |
|----------------|---------------|-------------|---|
| >>value | (any type) | 1 | Value of the metric collected. The type of this attribute shall correspond to the related "Measurement Unit" as defined in clause 8.4 of ETSI GS NFV-IFA 031 [1]. |
| >>context | KeyValuePairs | 0..1 | Measurement context information related to the measured value. The set of applicable keys is defined per measurement in clause 8.4 of ETSI GS NFV-IFA 031 [1]. |

6.6.2.11 Type: PmJobModifications

This type represents modifications to a PM job. It shall comply with the provisions defined in table 6.6.2.11-1.

Table 6.6.2.11-1: Definition of the PmJobModifications data type

| Attribute name | Data type | Cardinality | Description |
|----------------|----------------------------|-------------|---|
| callbackUri | Uri | 0..1 | New value of the "callbackUri" attribute. The value "null" is not permitted. See note. |
| authentication | SubscriptionAuthentication | 0..1 | New value of the "authentication" attribute, or "null" to remove the attribute. If present in a request body, these modifications shall be applied according to the rules of JSON Merge PATCH (see IETF RFC 7396 [3]). This attribute shall not be present in response bodies. See note. |

NOTE: At least one of the attributes defined in this type shall be present in request bodies.

6.6.2.12 Type: ThresholdModifications

This type represents modifications to a threshold. It shall comply with the provisions defined in table 6.6.2.12-1.

Table 6.6.2.12-1: Definition of the ThresholdModifications data type

| Attribute name | Data type | Cardinality | Description |
|----------------|--------------------------------|-------------|---|
| callbackUri | Uri | 0..1 | New value of the "callbackUri" attribute. The value "null" is not permitted. See note. |
| authentication | SubscriptionAuthenticatio n | 0..1 | New value of the "authentication" attribute, or "null" to remove the attribute. If present in a request body, these modifications shall be applied according to the rules of JSON Merge PATCH (see IETF RFC 7396 [3]). This attribute shall not be present in response bodies. See note. |

NOTE: At least one of the attributes defined in this type shall be present in request bodies.

6.6.3 Referenced structured data types

6.6.3.1 Introduction

This clause defines data structures that can be referenced from data structures defined in the previous clauses, but can neither be resource representations nor bound to any subscribe/notify mechanism.

6.6.3.2 Void

6.6.3.3 Type: PmJobCriteria

This type represents collection criteria for PM jobs. It shall comply with the provisions defined in table 6.6.3.3-1.

Table 6.6.3.3-1: Definition of the PmJobCriteria data type

| Attribute name | Data type | Cardinality | Description |
|---|-------------|-------------|--|
| performanceMetric | String | 0..N | This defines the types of performance metrics for the specified measured object(s). This attribute's value shall contain the related "Measurement Name" values as defined in clause 8.4 of ETSI GS NFV-IFA 031 [1]. At least one of the two attributes (performance metric or group) shall be present. |
| performanceMetricGroup | String | 0..N | Group of performance metrics. A metric group is a pre-defined list of metrics, known to the producer that it can decompose to individual metrics. This attribute's value shall contain the related "Measurement Group" values as defined in clause 8.4 of ETSI GS NFV-IFA 031 [1]. At least one of the two attributes (performance metric or group) shall be present. |
| collectionPeriod | UnsignedInt | 1 | Specifies the periodicity at which the producer will collect performance information. The unit shall be seconds. See notes 1 and 2. |
| reportingPeriod | UnsignedInt | 1 | Specifies the periodicity at which the producer will report to the API consumer about performance information. The unit shall be seconds. See notes 1 and 2. |
| reportingBoundary | DateTime | 0..1 | Identifies a time boundary after which the reporting will stop. The boundary shall allow a single reporting as well as periodic reporting up to the boundary. |
| NOTE 1: At the end of each reportingPeriod, the producer will inform the API consumer about availability of the performance data collected for each completed collection period during this reportingPeriod. The reportingPeriod should be equal to or a multiple of the collectionPeriod. In the latter case, the performance data for the collection periods within one reporting period are reported together. | | | |
| NOTE 2: In particular when choosing short collection and reporting periods, the number of PM jobs that can be supported depends on the capability of the producing entity. | | | |

6.6.3.4 Type: ThresholdCriteria

This type represents criteria that define a threshold. It shall comply with the provisions defined in table 6.6.3.4-1.

Table 6.6.3.4-1: Definition of the ThresholdCriteria data type

| Attribute name | Data type | Cardinality | Description |
|------------------------|---------------------|-------------|--|
| performanceMetric | String | 1 | Defines the performance metric associated with the threshold. This attribute's value shall contain the related "Measurement Name" values as defined in clause 8.4 of ETSI GS NFV-IFA 031 [1]. |
| thresholdType | Enum (inlined) | 1 | Type of threshold. This attribute determines which other attributes are present in the data structure. Permitted values: <ul style="list-style-type: none"> SIMPLE: Single-valued static threshold See note 1. |
| simpleThresholdDetails | Structure (inlined) | 0..1 | Details of a simple threshold. Shall be present if thresholdType="SIMPLE". |
| >thresholdValue | Number | 1 | The threshold value. Shall be represented as a floating point number. |

| Attribute name | Data type | Cardinality | Description |
|---|-----------|-------------|---|
| >hysteresis | Number | 1 | <p>The hysteresis of the threshold.</p> <p>Shall be represented as a non-negative floating point number.</p> <p>A notification with crossing direction "UP" will be generated if the measured value reaches or exceeds "thresholdValue" + "hysteresis". A notification with crossing direction "DOWN" will be generated if the measured value reaches or undercuts "thresholdValue" - "hysteresis". See note 2.</p> |
| NOTE 1: In the present document, simple thresholds are defined. The definition of additional threshold types is left for future specification. | | | |
| NOTE 2: The hysteresis is defined to prevent storms of threshold crossing notifications. When processing a request to create a threshold, implementations should enforce a suitable minimum value for this attribute (e.g. override the value or reject the request). | | | |

6.6.4 Referenced simple data types and enumerations

6.6.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

6.6.4.2 Simple data types

No particular simple data types are defined for this interface, in addition to those defined in clause 4.2.3.

6.6.4.3 Enumeration: CrossingDirectionType

The enumeration CrossingDirectionType shall comply with the provisions defined in table 6.6.4.3-1.

Table 6.6.4.3-1: Enumeration CrossingDirectionType

| Enumeration value | Description |
|-------------------|--|
| UP | The threshold was crossed in upward direction. |
| DOWN | The threshold was crossed in downward direction. |

7 NFV-MANO Fault Management interface

7.1 Description

This interface allows the consumer to subscribe to notifications regarding alarms provided by the producer NFV-MANO functional entity, and API version information retrieval. The consumer receives information through alarm notifications when a failure is detected by the producer NFV-MANO functional entity. The granularity of failures include:

- Communication failures with other peering functional entities.
- Failures affecting a specific interface produced by the producer NFV-MANO functional entity, e.g. VNF lifecycle management interface produced by a VNFM.
- Malfunctioning of the NFV-MANO functional entity due to failures on resources supporting the execution of the entity, e.g. CPU, memory, reported as event type relevant to resources (see Recommendation ITU-T X.733 [2]).

The operations provided through this interface are:

- Get Alarm List
- Acknowledge Alarm
- Subscribe
- Query Subscription Information
- Terminate Subscription
- Notify

7.2 API version

For the NFV-MANO fault management interface as specified in the present document, the MAJOR version field shall be 1, the MINOR version field shall be 1 and the PATCH version field shall be 0 (see clause 9.1 of ETSI GS NFV-SOL 013 [4] for a definition of the version fields). Consequently, the {apiMajorVersion} URI variable shall be set to "v1".

NOTE: In the present document, there were no changes to the clauses defining the NFV-MANO fault management interface that are visible at interface level compared to the previous version of the present document; hence, the MAJOR/MINOR/PATCH version fields are kept the same.

7.3 Resource structure and method

All resource URIs of the API shall use the base URI specification defined in clause 4.1 of ETSI GS NFV-SOL 013 [4]. The string "nfvmanofm" shall be used to represent {apiName}. All resource URIs in the clauses below are defined relative to the above base URI.

Figure 7.3-1 shows the overall resource URI structure defined for the NFV-MANO fault management interface.

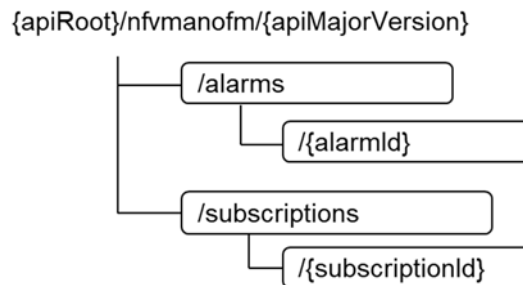


Figure 7.3-1: Resource URI structure of the NFV-MANO fault management interface

Table 7.3-1 lists the individual resources defined, and the applicable HTTP methods.

The NFV-MANO functional entity shall support responding to requests for all HTTP methods on the resources in table 7.3-1 that are marked as "M" (mandatory) in the "Cat" column. The NFV-MANO functional entity shall also support the "API versions" resources as specified in clause 9.3.2 of ETSI GS NFV-SOL 013 [4].

Table 7.3-1: Resources and methods overview of the NFV-MANO fault management interface


| Resource name | Resource URI | HTTP Method | Cat | Meaning |
|-------------------------|---------------------------------|-------------|----------|---|
| Alarms | /alarms | GET | M | Query alarms related to NFV-MANO functional entity. |
| Individual alarm | /alarms/{alarmId} | GET | M | Read individual alarm. |
| | | PATCH | M | Acknowledge individual alarm. |
| Subscriptions | /subscriptions | POST | M | Subscribe to NFV-MANO functional entity alarms. |
| | | GET | M | Query multiple subscriptions. |
| Individual subscription | /subscriptions/{subscriptionId} | GET | M | Read an individual subscription. |
| | | DELETE | M | Terminate a subscription. |
| Notification endpoint | (client-provided) | POST | See note | Notify about NFV-MANO functional entity alarms. See note. |
| | | GET | See note | Test the notification endpoint. See note. |

NOTE: The NFV-MANO functional entity shall support invoking the HTTP methods defined for the "Notification endpoint" resource exposed by the consumer. If the consumer supports invoking the POST method on the "Subscription" resource towards the NFV-MANO functional entity, it shall also support responding to the HTTP requests defined for the "Notification endpoint" resource.

7.4 Sequence diagrams

7.4.1 Flow of the Get Alarm List operation

This clause describes a sequence flow for querying one or multiple alarms.

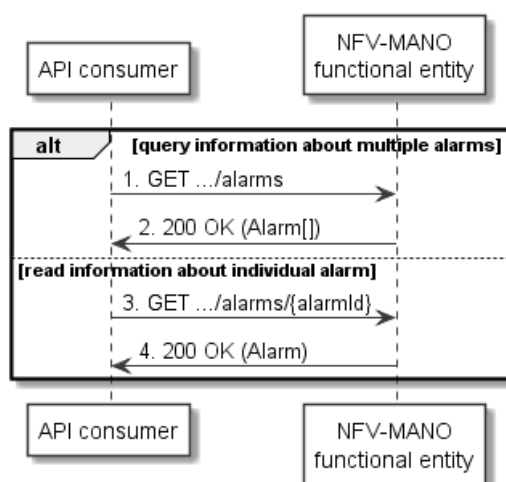**Figure 7.4.1-1: Flow of alarm query/read**

Alarm query, as illustrated in figure 7.4.1-1, consists of the following steps:

- 1) If the API consumer intends to query all alarms, it sends a GET request to the "Alarms" resource.
- 2) The NFV-MANO functional entity returns a "200 OK" response to the API consumer, and includes zero or more data structures of type "Alarm" in the message content.
- 3) If the API consumer intends to read a particular alarm, it sends a GET request to the "Individual alarm" resource, addressed by the appropriate alarm identifier in its resource URI.
- 4) The NFV-MANO functional entity returns a "200 OK" response to the API consumer, and includes a data structure of type "Alarm" in the message content.

Error handling: In case of failure, appropriate error information is provided in the response.

7.4.2 Flow of acknowledging alarm

This clause describes the procedure to acknowledge an individual alarm.

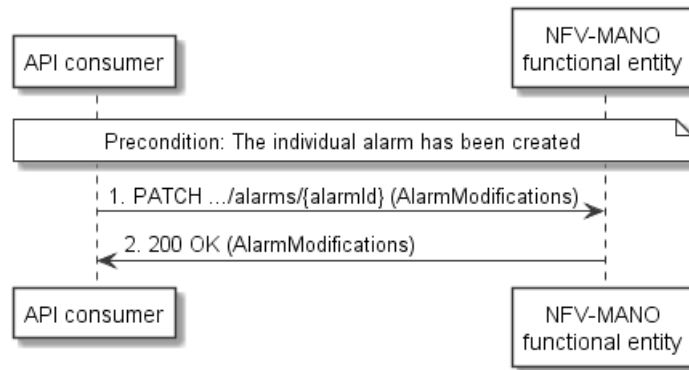


Figure 7.4.2-1: Flow of acknowledging alarm

Precondition: The resource representing the individual alarm has been created.

Acknowledge alarm, as illustrated in figure 7.4.2-1, consists of the following steps:

- 1) The API consumer sends a PATCH request to the individual alarm.
- 2) The NFV-MANO functional entity returns a "200 OK" response to the API consumer, and includes a data structure of type "AlarmModifications" in the message content.

Error handling: In case of failure, appropriate error information is provided in the response.

7.4.3 Flow of managing subscriptions

This clause describes the procedure for creating, reading and terminating subscriptions to notifications related to NFV-MANO fault management.

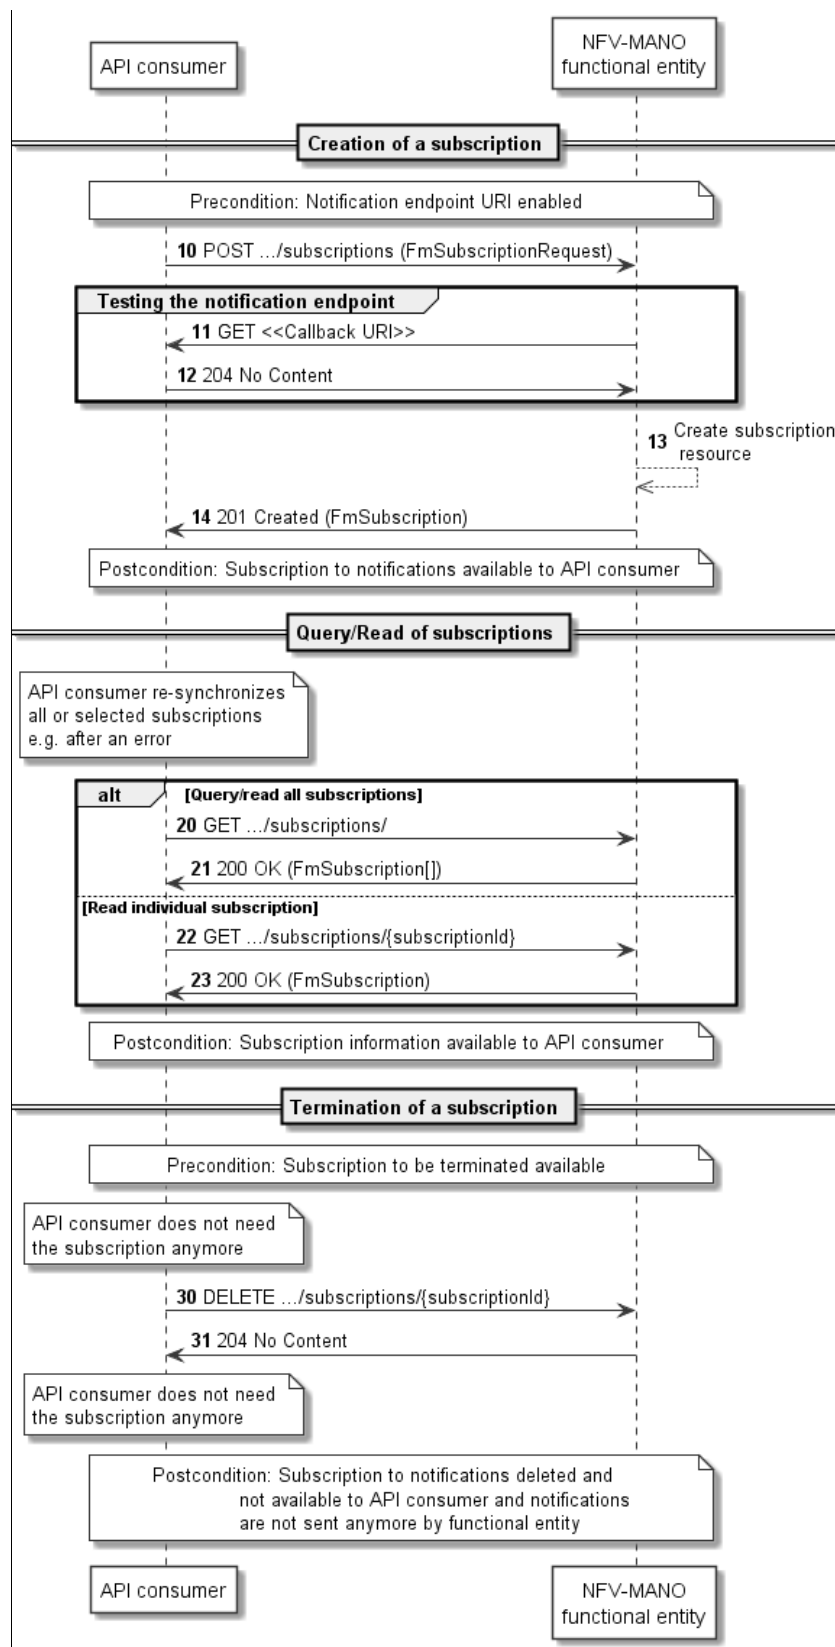


Figure 7.4.3-1: Flow of managing subscriptions

A) Procedure of creating subscriptions

The procedure of creating subscriptions consists of the following steps as illustrated in figure 7.4.3-1:

Precondition: The notification endpoint URI is enabled.

- 10) The API consumer sends a POST request to the "Subscriptions" resource including in the message content a data structure of type "FmSubscriptionRequest". This data structure contains filtering criteria and a client side URI to which the NFV-MANO functional entity will subsequently send notifications about events that match the filter.
- 11) To test the notification endpoint that was registered by the API consumer as part of the subscription, the NFV-MANO functional entity sends a GET request to the notification endpoint URI.
- 12) The API consumer returns a "204 No Content" response to indicate success.
- 13) The NFV-MANO functional entity creates a new subscription for notifications related to NFV-MANO functional entity fault management, and a resource that represents this subscription.
- 14) The NFV-MANO functional entity returns a "201 Created" response containing a data structure of type "FmSubscription", representing the subscription resource just created by the NFV-MANO functional entity, and provides the URI of the newly-created resource in the "Location" HTTP header.

Postcondition: The subscription to notifications related to NFV-MANO fault management is available to the API consumer.

Error handling: The NFV-MANO functional entity rejects a subscription if the subscription information is not valid: invalid notification endpoint, subscription information is malformed, etc.

B) Procedure of querying/reading subscriptions

The procedure of querying/reading subscriptions consists of the following steps, as illustrated in figure 7.4.3-1:

- 20) Optionally, for example when trying to recover from an error situation, the API consumer may query information about its subscriptions by sending a GET request to the "Subscriptions" resource.
- 21) In that case, the NFV-MANO functional entity returns a "200 OK" response that contains the list of representations of all existing subscriptions that were created by the API consumer.
- 22) Optionally, for example when trying to recover from an error situation, the API consumer may read information about a particular subscription by sending a GET request to the resource representing that individual subscription.
- 23) In that case, the NFV-MANO functional entity returns a "200 OK" response that contains a representation of that individual subscription.

Postcondition: The subscription information is available to the API consumer.

Error handling: The NFV-MANO functional entity provides in the response message appropriate error information that reports an erroneous query request.

C) Procedure of terminating a subscription

The procedure of terminating a subscription consists of the following steps, as illustrated in figure 7.4.3-1:

Precondition: The subscription to be terminated is available.

- 30) When the API consumer does not need the subscription anymore, it terminates the subscription by sending a DELETE request to the resource that represents the individual subscription.
- 31) The NFV-MANO functional entity acknowledges the successful termination of the subscription by returning a "204 No Content" response.

Postcondition: The subscription to notifications related to NFV-MANO fault management is deleted and not available to the API consumer, and notifications associated to this subscription are not sent anymore by the NFV-MANO functional entity.

Error handling: The NFV-MANO functional entity provides in the response message appropriate error information that reports an erroneous termination request: the subscription to terminate is not available, etc.

7.4.4 Flow of sending notifications

This clause describes the procedure for sending notifications related to NFV-MANO fault management.

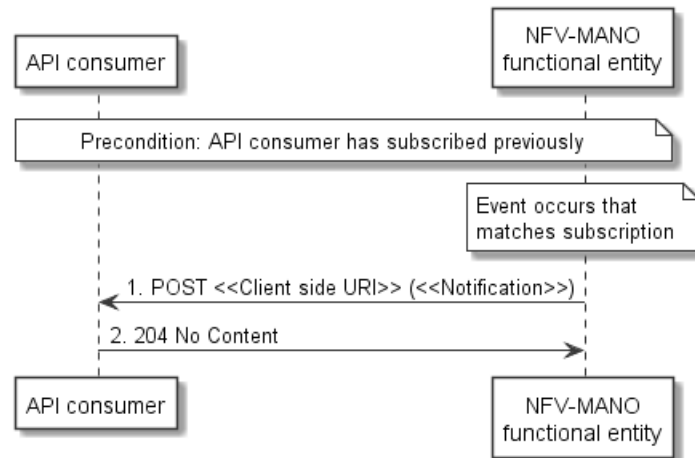


Figure 7.4.4-1: Flow of sending notifications

Precondition: The consumer has subscribed previously for notifications related to NFV-MANO functional entity fault management.

The procedure consists of the following steps as illustrated in figure 7.4.4-1:

- 1) If an event occurs that matches the filtering criteria which are part of the subscription, the NFV-MANO functional entity generates a notification that includes information about the event, and sends it in the body of a POST request to the URI which the API consumer has registered as part of the subscription request. The variable <<Notification>> in the flow is a placeholder for the different types of notifications that can be sent by this API (see clauses 7.6.2.5, 7.6.2.6 and 7.6.2.7).
- 2) The API consumer acknowledges the successful delivery of the notification by returning a "204 No Content" response.

Error handling: If the NFV-MANO functional entity does not receive the "204 No Content" response from the API consumer, it can retry sending the notification.

7.5 Resources

7.5.1 Introduction

This clause defines all the resources and methods provided by the NFV-MANO fault management interface.

7.5.2 Resource: API versions

The "API versions" resources as defined in clause 9.3.3 of ETSI GS NFV-SOL 013 [4] are part of the NFV-MANO fault management interface.

7.5.3 Resource: Alarms

7.5.3.1 Description

This resource represents a list of alarms related to NFV-MANO functional entity.

7.5.3.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanofm/{apiMajorVersion}/alarms

This resource shall support the resource URI variables defined in table 7.5.3.2-1.

Table 7.5.3.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 7.2. |

7.5.3.3 Resource methods

7.5.3.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.3.3.2 GET

The client can use this method to retrieve information about the alarm list.

This method shall follow the provisions specified in tables 7.5.3.3.2-1 and 7.5.3.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 7.5.3.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|------------------------|-------------|---|
| filter | 0..1 | Attribute-based filtering expression according to clause 5.2 of ETSI GS NFV-SOL 013 [4]. The NFV-MANO functional entity shall support receiving this parameter as part of the URI query string. The API consumer may supply this parameter. The following attribute names shall be supported by the NFV-MANO functional entity in the attribute-based filtering expression: id, managedObjectId, eventType, perceivedSeverity, probableCause. |
| next_opaque _marker | 0..1 | Marker to obtain the next page of a paged resource. Shall be supported by the NFV-MANO functional entity if the entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource. |

NOTE: There are no attribute selectors defined for this resource as the Alarm attributes with cardinality 0..1 or 0..N are not structurally complex in nature.

Table 7.5.3.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|-----------------|---|
| n/a | | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | Alarm | 0..N | 200 OK | <p>Shall be returned when information about zero or more alarms has been queried successfully.</p> <p>The response body shall contain in an array the representations of zero or more alarms as defined in clause 7.6.2.4.</p> <p>If the "filter" URI parameter was supplied in the request, the data in the response body shall have been transformed according to the rules specified in clause 5.2.2 of ETSI GS NFV-SOL 013 [4].</p> <p>If the NFV-MANO functional entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, inclusion of the Link HTTP header in this response shall follow the provisions in clause 5.4.2.3 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute-based filtering expression.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Response too big.</p> <p>If the NFV-MANO functional entity supports alternative 1 (error) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, this error response shall follow the provisions in clause 5.4.2.2 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

7.5.3.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.3.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.3.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.4 Resource: Individual alarm

7.5.4.1 Description

This resource represents an individual alarm.

7.5.4.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanofm/{apiMajorVersion}/alarms/{alarmId}

This resource shall support the resource URI variables defined in table 7.5.4.2-1.

Table 7.5.4.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 7.2. |
| alarmId | Identifier of the alarm. See note. |
| NOTE: | This identifier can be retrieved from the "id" attribute of the "alarm" attribute in the AlarmNotification or AlarmClearedNotification. It can also be retrieved from the "id" attribute of the applicable array element in the message content of the response to a GET request to the "Alarms" resource. |

7.5.4.3 Resource methods

7.5.4.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.4.3.2 GET

The client can use this method to read an individual alarm.

This method shall follow the provisions specified in tables 7.5.4.3.2-1 and 7.5.4.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 7.5.4.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 7.5.4.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|---|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | Alarm | 1 | 200 | Shall be returned when information about an individual alarm has been read successfully. The response body shall contain a representation of the individual alarm. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

7.5.4.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.4.3.4 PATCH

This method modifies an "Individual alarm" resource.

This method shall follow the provisions specified in tables 7.5.4.3.4-1 and 7.5.4.3.4-2 for URI query parameters, request and response data structures, and response codes.

Table 7.5.4.3.4-1: URI query parameters supported by the PATCH method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 7.5.4.3.4-2: Details of the PATCH request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-----------------------|-------------|---|--|
| | AlarmModifications | 1 | The parameter for the alarm modification, as defined in clause 7.6.2.8. The Content-Type header shall be set to "application/merge-patch+json" according to IETF RFC 7396 [3]. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | AlarmModifications | 1 | 200 OK | Shall be returned when the request has been accepted and completed. The response body shall contain attribute modifications for an "Individual alarm" resource (see clause 7.6.2.4). |
| | ProblemDetails | 1 | 409 Conflict | Shall be returned upon the following error: The operation cannot be executed currently, due to a conflict with the state of the "Individual alarm" resource. Typically, this is due to the fact that the alarm is already in the state that is requested to be set (such as trying to acknowledge an already-acknowledged alarm). The response body shall contain a ProblemDetails structure, in which the "detail" attribute shall convey more information about the error. |
| | ProblemDetails | 0..1 | 412 Precondition failed | Shall be returned upon the following error: A precondition given in an HTTP request header is not fulfilled. Typically, this is due to an ETag mismatch, indicating that the resource was modified by another entity. The response body should contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error. |
| ProblemDetails | See clause 6.4 of [4] | | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

7.5.4.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.5 Resource: Subscriptions

7.5.5.1 Description

This resource represents subscriptions. The client can use this resource to subscribe to notifications related to NFV-MANO functional entity alarms and to query its subscriptions.

7.5.5.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanofm/{apiMajorVersion}/subscriptions

This resource shall support the resource URI variables defined in table 7.5.5.2-1.

Table 7.5.5.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 7.2. |

7.5.5.3 Resource methods

7.5.5.3.1 POST

The POST method creates a new subscription.

This method shall follow the provisions specified in tables 7.5.5.3.1-1 and 7.5.5.3.1-2 for URI query parameters, request and response data structures, and response codes.

As the result of successfully executing this method, a new "Individual subscription" resource as defined in clause 7.5.6 shall have been created. This method shall not trigger any notification.

Creation of two "Individual subscription" resources with the same callbackURI and the same filter can result in performance degradation and will provide duplicates of notifications to the API consumer, and might make sense only in very rare use cases. Consequently, the NFV-MANO functional entity may either allow creating a new "Individual subscription" resource if another "Individual subscription" resource with the same filter and callbackUri already exists (in which case it shall return the "201 Created" response code), or may decide to not create a duplicate "Individual subscription" resource (in which case it shall return a "303 See Other" response code referencing the existing "Individual subscription" resource with the same filter and callbackUri).

Table 7.5.5.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Remarks |
|----------------|-------------|---------|
| none supported | | |

Table 7.5.5.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-----------------------|-------------|--|--|
| | FmSubscriptionRequest | 1 | Details of the subscription to be created, as defined in clause 7.6.2.2. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | FmSubscription | 1 | 201 Created | <p>Shall be returned when the subscription has been created successfully.</p> <p>The response body shall contain a representation of the created "Individual subscription" resource.</p> <p>The HTTP response shall include a "Location" HTTP header that points to the created "Individual subscription" resource.</p> |
| | n/a | | 303 See Other | <p>Shall be returned when a subscription with the same callbackURI and the same filter already exists and the policy of the NFV-MANO functional entity is to not create redundant subscriptions.</p> <p>The HTTP response shall include a "Location" HTTP header that contains the resource URI of the existing "Individual subscription" resource.</p> <p>The response body shall be empty.</p> |
| | ProblemDetails | 1 | 422 Unprocessable Content | <p>Shall be returned upon the following error: The content type of the message content is supported and the message content of a request contains syntactically correct data but the data cannot be processed.</p> <p>The general cause for this error and its handling is specified in clause 6.4 of ETSI GS NFV-SOL 013 [4], including rules for the presence of the response body.</p> <p>Specifically in case of this resource, the response code 422 shall also be returned if the API producer has tested the Notification endpoint as described in clause 7.5.7.3.2 and the test has failed.</p> <p>In this case, the "detail" attribute in the "ProblemDetails" structure shall convey more information about the error.</p> |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

7.5.5.3.2 GET

The client can use this method to retrieve the list of active subscriptions for NFV-MANO functional entity alarms subscribed by the client. It can be used e.g. for resynchronization after error situations.

This method shall follow the provisions specified in tables 7.5.5.3.2-1 and 7.5.5.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 7.5.5.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Remarks |
|--------------------|-------------|--|
| filter | 0..1 | <p>Attribute-based filtering expression according to clause 5.2 of ETSI GS NFV-SOL 013 [4].</p> <p>The NFV-MANO functional entity shall support receiving this parameter as part of the URI query string. The API consumer may supply this parameter.</p> <p>All attribute names that appear in the FmSubscription and in data types referenced from it shall be supported by the NFV-MANO functional entity in the filter expression.</p> |
| next_opaque_marker | 0..1 | <p>Marker to obtain the next page of a paged response. Shall be supported by the NFV-MANO functional entity if the entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource.</p> |

Table 7.5.5.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|-----------------|---|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | FmSubscription | 0..N | 200 OK | <p>Shall be returned when the list of subscriptions has been queried successfully.</p> <p>The response body shall contain in an array the representations of all active subscriptions of the functional block that invokes the method, i.e. zero or more representations of FM subscriptions as defined in clause 7.6.2.3.</p> <p>If the "filter" URI parameter was supplied in the request, the data in the response body shall have been transformed according to the rules specified in clause 5.2.2 of ETSI GS NFV-SOL 013 [4].</p> <p>If the NFV-MANO functional entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, inclusion of the Link HTTP header in this response shall follow the provisions in clause 5.4.2.3 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute-based filtering expression.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error. Response too big.</p> <p>If the NFV-MANO functional entity supports alternative 1 (error) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, this error response shall follow the provisions in clause 5.4.2.2 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | <p>In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned.</p> |

7.5.5.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.5.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.5.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.6 Resource: Individual subscription

7.5.6.1 Description

This resource represents an individual subscription for NFV-MANO functional entity alarms. The client can use this resource to read and to terminate a subscription to notifications related to NFV-MANO fault management.

7.5.6.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanofm/{apiMajorVersion}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 7.5.6.2-1.

Table 7.5.6.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 7.2. |
| subscriptionId | Identifier of this subscription. See note. |
| NOTE: | This identifier can be retrieved from the resource referenced by the "Location" HTTP header in the response to a POST request creating a new "Individual subscription" resource. It can also be retrieved from the "id" attribute in the message content of that response. |

7.5.6.3 Resource methods

7.5.6.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.6.3.2 GET

The client can use this method for reading an individual subscription for NFV-MANO functional entity alarms subscribed by the client.

This method shall follow the provisions specified in tables 7.5.6.3.2-1 and 7.5.6.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 7.5.6.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 7.5.6.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | FmSubscription | 1 | 200 OK | Shall be returned when information about an individual subscription has been read successfully. The response body shall contain a representation of the "Individual subscription" resource. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

7.5.6.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.6.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.6.3.5 DELETE

This method terminates an individual subscription.

This method shall follow the provisions specified in tables 7.5.6.3.5-1 and 7.5.6.3.5-2 for URI query parameters, request and response data structures, and response codes.

As the result of successfully executing this method, the "Individual subscription" resource shall not exist any longer. This means that no notifications for that subscription shall be sent to the formerly-subscribed API consumer.

NOTE: Due to race conditions, some notifications might still be received by the formerly-subscribed API consumer for a certain time period after the deletion.

Table 7.5.6.3.5-1: URI query parameters supported by the DELETE method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 7.5.6.3.5-2: Details of the DELETE request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | Shall be returned when the "Individual subscription" resource has been deleted successfully. The response body shall be empty. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

7.5.7 Resource: Notification endpoint

7.5.7.1 Description

This resource represents a notification endpoint for NFV-MANO functional entity alarms.

The API producer can use this resource to send notifications related to NFV-MANO functional entity alarms or about a rebuilt alarm list to a subscribed API consumer, which has provided the URI of this resource during the subscription process.

7.5.7.2 Resource definition

The resource URI is provided by the client when creating the subscription.

This resource shall support the resource URI variables defined in table 7.5.7.2-1.

Table 7.5.7.2-1: Resource URI variables for this resource

| Name | Definition |
|------|------------|
| n/a | |

7.5.7.3 Resource methods

7.5.7.3.1 POST

The POST method notifies an NFV-MANO functional entity alarm or that the alarm list has been rebuilt. The API consumer shall have previously created an "Individual subscription" resource with a matching filter.

This method shall follow the provisions specified in tables 7.5.7.3.1-1 and 7.5.7.3.1-2 for URI query parameters, request and response data structures, and response codes.

Table 7.5.7.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Each notification request body shall include exactly one of the alternatives defined in table 7.5.7.3.1-2.

Table 7.5.7.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|------------------------------|-----------------------|---|--|
| | AlarmNotification | 1 | Information of an NFV-MANO functional entity alarm. | |
| | AlarmClearedNotification | 1 | Information of the clearance of an NFV-MANO functional entity alarm. | |
| | AlarmListRebuiltNotification | 1 | Information that the alarm list has been rebuilt by the NFV-MANO functional entity. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | Shall be returned when the notification has been delivered successfully. The response body shall be empty. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

7.5.7.3.2 GET

The GET method allows the server to test the notification endpoint that is provided by the client, e.g. during subscription.

This method shall follow the provisions specified in tables 7.5.7.3.2-1 and 7.5.7.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 7.5.7.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 7.5.7.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | Shall be returned to indicate that the notification endpoint has been tested successfully. The response body shall be empty. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

7.5.7.3.3 PUT

This method is not supported. When this method is requested on this resource, the API consumer shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.7.3.4 PATCH

This method is not supported. When this method is requested on this resource, the API consumer shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.5.7.3.5 DELETE

This method is not supported. When this method is requested on this resource, the API consumer shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

7.6 Data model

7.6.1 Introduction

This clause defines the request and response data structures of the NFV-MANO fault management interface. If a request or response contains attributes not defined in the present document, a receiving functional block that does not understand these attributes shall not treat their presence as an error, and may choose to ignore them.

7.6.2 Resource and notification data types

7.6.2.1 Introduction

This clause defines the data structures to be used in the resource representations and notifications for the NFV-MANO fault management interface.

7.6.2.2 Type: FmSubscriptionRequest

This type represents a subscription request related to notifications about NFV-MANO functional entity faults. It shall comply with the provisions defined in table 7.6.2.2-1.

Table 7.6.2.2-1: Definition of the FmSubscriptionRequest data type

| Attribute name | Data type | Cardinality | Description |
|----------------|----------------------------|-------------|--|
| filter | FmNotificationsFilter | 0..1 | Filter settings for this subscription, to define the subset of all notifications this subscription relates to. A particular notification is sent to the subscriber if the filter matches, or if there is no filter. |
| callbackUri | Uri | 1 | The URI of the endpoint to send the notification to. |
| authentication | SubscriptionAuthentication | 0..1 | Authentication parameters to configure the use of Authorization when sending notifications corresponding to this subscription, as defined in clause 8.3.4 of ETSI GS NFV-SOL 013 [4]. This attribute shall only be present if the subscriber requires authorization of notifications. |

7.6.2.3 Type: FmSubscription

This type represents a subscription related to notifications about NFV-MANO functional entity faults. It shall comply with the provisions defined in table 7.6.2.3-1.

Table 7.6.2.3-1: Definition of the FmSubscription data type

| Attribute name | Data type | Cardinality | Description |
|----------------|-----------------------|-------------|---|
| id | Identifier | 1 | Identifier of this subscription resource. |
| filter | FmNotificationsFilter | 0..1 | Filter settings for this subscription, to define the subset of all notifications this subscription relates to. A particular notification is sent to the subscriber if the filter matches, or if there is no filter. |
| callbackUri | Uri | 1 | The URI of the endpoint to send the notification to. |
| _links | Structure (inlined) | 1 | Links for this resource. |
| >self | Link | 1 | URI of this resource. |

7.6.2.4 Type: Alarm

The alarm data type encapsulates information about an alarm. It shall comply with the provisions defined in table 7.6.2.4-1.

Table 7.6.2.4-1: Definition of the Alarm data type

| Attribute name | Data type | Cardinality | Description |
|-------------------------------|----------------------------|-------------|---|
| id | Identifier | 1 | Identifier of this Alarm information element. |
| managedObjectId | Identifier | 1 | Identifier of the affected NFV-MANO functional entity. |
| associatedFaultyInstanceIcnId | ManoManagedObjectReference | 0..1 | The constituent of the NFV-MANO functional entity (i.e. component (if supported), service, interface) to which the fault is associated. Shall be provided if known. |
| alarmRaisedTime | DateTime | 1 | Time stamp indicating when the alarm is raised by the managed object. |
| alarmChangedTime | DateTime | 0..1 | Time stamp indicating when the alarm was last changed. It shall be present if the alarm has been updated. |
| alarmClearedTime | DateTime | 0..1 | Time stamp indicating when the alarm was cleared. It shall be present if the alarm has been cleared. |

| Attribute name | Data type | Cardinality | Description |
|--------------------|-----------------------|-------------|---|
| ackState | Enum (inlined) | 1 | Acknowledgement state of the alarm. Permitted values: <ul style="list-style-type: none"> UNACKNOWLEDGED. ACKNOWLEDGED. |
| perceivedSeverity | PerceivedSeverityType | 1 | Perceived severity of the managed object failure. |
| eventTime | DateTime | 1 | Time stamp indicating when the fault was observed. |
| eventType | EventType | 1 | Type of event. |
| faultType | String | 0..1 | Additional information to clarify the type of the fault. |
| probableCause | String | 1 | Information about the probable cause of the fault. |
| isRootCause | Boolean | 1 | Attribute indicating if this fault is the root for other correlated alarms. If TRUE, then the alarms listed in the attribute CorrelatedAlarmIds are caused by this fault. |
| correlatedAlarmIds | Identifier | 0..N | List of identifiers of other alarms correlated to this fault. |
| faultDetails | String | 0..N | Provides additional information about the fault. |
| _links | Structure (inlined) | 1 | Links for this resource. |
| >self | Link | 1 | URI of this resource. |
| >objectInstance | Link | 0..1 | Link to the resource representing the NFV-MANO functional entity to which the notified alarm is correlated. Shall be present if the NFV-MANO functional entity information is accessible as a resource. |

7.6.2.5 Type: AlarmNotification

This type represents an alarm notification about NFV-MANO functional entity faults. It shall comply with the provisions defined in table 7.6.2.5-1.

This notification shall be triggered by the NFV-MANO functional entity when:

- An alarm has been created.
- An alarm has been updated, e.g. if the severity of the alarm has changed.

Table 7.6.2.5-1: Definition of the AlarmNotification data type

| Attribute name | Data type | Cardinality | Description |
|------------------|---------------------|-------------|---|
| id | Identifier | 1 | Identifier of this notification. If a notification is sent multiple times due to multiple subscriptions, the "id" attribute of all these notifications shall have the same value. |
| notificationType | String | 1 | Discriminator for the different notification types. Shall be set to "AlarmNotification" for this notification type. |
| subscriptionId | Identifier | 1 | Identifier of the subscription that this notification relates to. |
| timeStamp | DateTime | 1 | Date-time of the generation of the notification. |
| alarm | Alarm | 1 | Information about an alarm including AlarmId, affected identifier of NFV-MANO functional entity, and FaultDetails. |
| _links | Structure (inlined) | 1 | Links to resources related to this notification. |
| >subscription | NotificationLink | 1 | Link to the related subscription. |

7.6.2.6 Type: AlarmClearedNotification

This type represents an alarm cleared notification about NFV-MANO functional entity faults. It shall comply with the provisions defined in table 7.6.2.6-1.

The notification shall be triggered by the NFV-MANO functional entity when an alarm has been cleared.

Table 7.6.2.6-1: Definition of the AlarmClearedNotification data type

| Attribute name | Data type | Cardinality | Description |
|------------------|---------------------|-------------|---|
| id | Identifier | 1 | Identifier of this notification. If a notification is sent multiple times due to multiple subscriptions, the "id" attribute of all these notifications shall have the same value. |
| notificationType | String | 1 | Discriminator for the different notification types. Shall be set to "AlarmClearedNotification" for this notification type. |
| subscriptionId | Identifier | 1 | Identifier of the subscription that this notification relates to. |
| timeStamp | DateTime | 1 | Date-time of the generation of the notification. |
| alarmId | Identifier | 1 | Alarm identifier. |
| alarmClearedTime | DateTime | 1 | The time stamp indicating when the alarm was cleared. |
| _links | Structure (inlined) | 1 | Links to resources related to this notification. |
| >subscription | NotificationLink | 1 | Link to the related subscription. |
| >alarm | NotificationLink | 1 | Link to the resource that represents the related alarm. |

7.6.2.7 Type: AlarmListRebuiltNotification

This type represents a notification that the alarm list has been rebuilt, e.g. if the NFV-MANO functional entity detects its storage holding the alarm list is corrupted. It shall comply with the provisions defined in table 7.6.2.7-1.

The notification shall be triggered by the NFV-MANO functional entity when the alarm list has been rebuilt.

Table 7.6.2.7-1: Definition of the AlarmListRebuiltNotification data type

| Attribute name | Data type | Cardinality | Description |
|------------------|---------------------|-------------|---|
| id | Identifier | 1 | Identifier of this notification. If a notification is sent multiple times due to multiple subscriptions, the "id" attribute of all these notifications shall have the same value. |
| notificationType | String | 1 | Discriminator for the different notification types. Shall be set to "AlarmListRebuiltNotification" for this notification type. |
| subscriptionId | Identifier | 1 | Identifier of the subscription that this notification relates to. |
| timeStamp | DateTime | 1 | Date-time of the generation of the notification. |
| _links | Structure (inlined) | 1 | Links to resources related to this notification. |
| >subscription | NotificationLink | 1 | Link to the related subscription. |
| >alarms | NotificationLink | 1 | Link to the alarm list, i.e. the "Alarms" resource. |

7.6.2.8 Type: AlarmModifications

This type represents attribute modifications for an "Individual alarm" resource, i.e. modifications to a resource representation based on the "Alarm" data type. The attributes of "Alarm" that can be modified according to the provisions in clause 7.6.2.4 are included in the "AlarmModifications" data type.

The "AlarmModifications" data type shall comply with the provisions defined in table 7.6.2.8-1.

Table 7.6.2.8-1: Definition of the AlarmModifications data type

| Attribute name | Data type | Cardinality | Description |
|----------------|----------------|-------------|--|
| ackState | Enum (inlined) | 1 | New value of the "ackState" attribute in "Alarm". Permitted values: <ul style="list-style-type: none"> ACKNOWLEDGED. |

7.6.3 Referenced structured data types

7.6.3.1 Introduction

This clause defines data structures that can be referenced from data structures defined in the previous clauses, but can neither be resource representations nor bound to any subscribe/notify mechanism.

7.6.3.2 Type: FmNotificationsFilter

This type represents a subscription filter related to notifications about NFV-MANO functional entity faults. It shall comply with the provisions defined in table 7.6.3.2-1.

At a particular nesting level in the filter structure, the following applies: All attributes shall match in order for the filter to match (logical "and" between different filter attributes). If an attribute is an array, the attribute shall match if at least one of the values in the array matches (logical "or" between the values of one filter attribute).

Table 7.6.3.2-1: Definition of the FmNotificationsFilter data type

| Attribute name | Data type | Cardinality | Description |
|---------------------|---|-------------|---|
| notificationTypes | Enum (inlined) | 0..N | Match particular notification types. Permitted values: <ul style="list-style-type: none"> AlarmNotification AlarmClearedNotification AlarmListRebuiltNotification See note. |
| perceivedSeverities | PerceivedSeverityType | 0..N | Match NFV-MANO functional entity alarms with a perceived severity listed in this attribute. |
| eventTypes | EventType | 0..N | Match NFV-MANO functional entity alarms with an event type listed in this attribute. |
| probableCauses | String | 0..N | Match NFV-MANO functional entity alarms with a probable cause listed in this attribute. |
| NOTE: | The permitted values of the "notificationTypes" attribute are spelled exactly as the names of the notification types to facilitate automated code generation systems. | | |

7.6.4 Referenced simple data types and enumerations

7.6.4.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

7.6.4.2 Simple data types

No particular simple data types are defined for this interface, in addition to those defined in clause 4.2.

7.6.4.3 Enumeration: PerceivedSeverityType

The enumeration PerceivedSeverityType shall comply with the provisions defined in table 7.6.4.3-1. It indicates the relative level of urgency for operator attention.

Table 7.6.4.3-1: Enumeration PerceivedSeverityType

| Enumeration value | Description |
|-------------------|---|
| CRITICAL | The Critical severity level indicates that a service affecting condition has occurred and an immediate corrective action is required. Such a severity can be reported, for example, when a managed object becomes totally out of service and its capability needs to be restored (Recommendation ITU-T X.733 [2]). |
| MAJOR | The Major severity level indicates that a service affecting condition has developed and an urgent corrective action is required. Such a severity can be reported, for example, when there is a severe degradation in the capability of the managed object and its full capability needs to be restored (Recommendation ITU-T X.733 [2]). |
| MINOR | The Minor severity level indicates the existence of a non-service affecting fault condition and that corrective action should be taken in order to prevent a more serious (for example, service affecting) fault. Such a severity can be reported, for example, when the detected alarm condition is not currently degrading the capacity of the managed object (Recommendation ITU-T X.733 [2]). |
| WARNING | The Warning severity level indicates the detection of a potential or impending service affecting fault, before any significant effects have been felt. Action should be taken to further diagnose (if necessary) and correct the problem in order to prevent it from becoming a more serious service affecting fault (Recommendation ITU-T X.733 [2]). |
| INDETERMINATE | The Indeterminate severity level indicates that the severity level cannot be determined (Recommendation ITU-T X.733 [2]). |
| CLEARED | The Cleared severity level indicates the clearing of one or more previously reported alarms. This alarm clears all alarms for this managed object that have the same Alarm type, Probable cause and Specific problems (if given) (Recommendation ITU-T X.733 [2]). |

7.6.4.4 Enumeration: EventType

The enumeration EventType represents those types of events that trigger an alarm. It shall comply with the provisions defined in table 7.6.4.4-1.

Table 7.6.4.4-1: Enumeration EventType

| Enumeration value | Description |
|------------------------|--|
| COMMUNICATIONS_ALARM | An alarm of this type is associated with the procedure and/or process required conveying information from one point to another (Recommendation ITU-T X.733 [2]). |
| PROCESSING_ERROR_ALARM | An alarm of this type is associated with a software or processing fault (Recommendation ITU-T X.733 [2]). |
| ENVIRONMENTAL_ALARM | An alarm of this type is associated with a condition related to an enclosure in which the equipment resides (Recommendation ITU-T X.733 [2]). |
| QOS_ALARM | An alarm of this type is associated with degradation in the quality of a service (Recommendation ITU-T X.733 [2]). |
| EQUIPMENT_ALARM | An alarm of this type is associated with an equipment fault (Recommendation ITU-T X.733 [2]). |

8 NFV-MANO Log Management interface

8.1 Description

This interface enables an API consumer to manage logging jobs on the producer NFV-MANO functional entity, and it enables corresponding log reporting. A logging job represents the filtering criteria for processing and creating log reports from the logs generated by the underlying system of the NFV-MANO functional entity. The interface does not provide the means to "control and manage" the underlying log system of the NFV-MANO functional entity.

NOTE 1: The logging sources of the underlying log system are assumed to be active, in particular those that deliver logging data corresponding to the types and filtering criteria of logging jobs. It is not specified in the present document how the configuration of the log system is performed.

The interface also enables the API consumer to subscribe to and notify about events related to the availability of the log reports.

The interface enables managing different types of filtered logs, which can be grouped, at large, into two categories:

- Messaging logs: logs of messages exchanged on an interface between NFV-MANO functional entities, and between NFV-MANO functional entities and external entities. This includes logging of the input and output message parameters of interfaces exposed by the functional entities, e.g. input and output messages when an NFVO functional entity queries the InstantiateVnf operation of the VNF LCM interface.
- Provider-specific logs: provider-specific logs of NFV-MANO functional entity. In this case, it is assumed that such logs may have security restrictions in place, e.g. be encrypted, so that only a certain organization can have access to the content in the log.

The operations provided through this interface are:

- Create Logging Job;
- Stop Logging Job;
- Query Logging Job;
- Subscribe;
- Terminate Subscription;
- Notify;
- Query Subscription Information.

NOTE 2: The CreateLoggingJob and StopLoggingJob operations can be used to create and terminate a specific logging job for messaging logs or provider-specific logs. The NFV-MANO functional entity may also have pre-configured logging jobs.

8.2 API version

For the NFV-MANO log management interface as specified in the present document, the MAJOR version field shall be 1, the MINOR version field shall be 1 and the PATCH version field shall be 0 (see clause 9.1 of ETSI GS NFV-SOL 013 [4] for a definition of the version fields). Consequently, the {apiMajorVersion} URI variable shall be set to "v1".

NOTE: In the present document, there were no changes to the clauses defining the NFV-MANO log management interface that are visible at interface level compared to the previous version of the present document; hence, the MAJOR/MINOR/PATCH version fields are kept the same.

8.3 Resource structure and method

All resource URIs of the API shall use the base URI specification defined in clause 4.1 of ETSI GS NFV-SOL 013 [4].

The string "nfvmanologm" shall be used to represent {apiName}. All resource URIs in the clauses below are defined relative to the above base URI.

Figure 8.3-1 shows the overall resource URI structure defined for the performance management API.

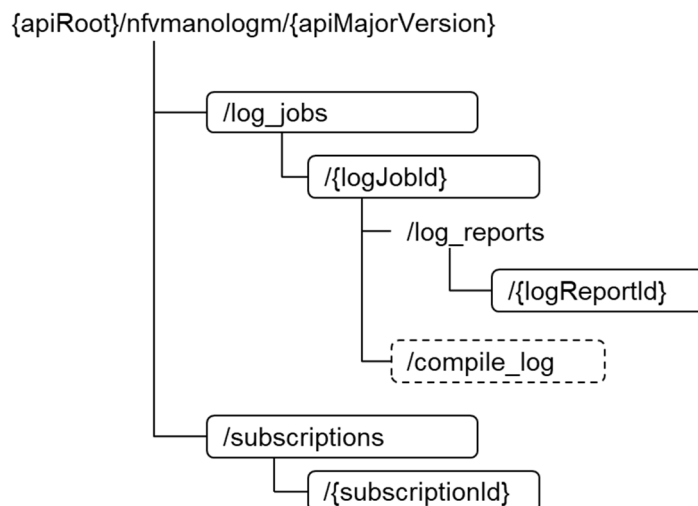


Figure 8.3-1: Resource URI structure of the NFV-MANO log management interface

Table 8.3-1 lists the individual resources defined, and the applicable HTTP methods.

The NFV-MANO functional entity shall support responding to requests for all HTTP methods on the resources in table 8.3-1 that are marked as "M" (mandatory) in the "Cat" column. The NFV-MANO functional entity shall also support the "API versions" resources as specified in clause 8.3.2 of ETSI GS NFV-SOL 013 [4].

Table 8.3-1: Resources and methods overview of the NFV-MANO log management interface

| Resource name | Resource URI | HTTP Method | Cat | Meaning |
|-------------------------|--|-------------|----------|---|
| Logging jobs | /log_jobs | POST | M | Create a logging job. |
| | | GET | M | Query logging jobs. |
| Individual logging job | /log_jobs/{logJobId} | GET | M | Read a single logging job. |
| | | DELETE | M | Delete a logging job. |
| Compile log task | /log_jobs/{logJobId}/compile_log | POST | M | On-demand compilation of the log data into a file. |
| Individual log report | /log_jobs/{logJobId}/log_reports/{logReportId} | GET | M | Read an individual log report. |
| Subscriptions | /subscriptions | POST | M | Subscribe to log management notifications. |
| | | GET | M | Query log management related subscriptions. |
| Individual subscription | /subscriptions/{subscriptionId} | GET | M | Read a single log management related subscription. |
| | | DELETE | M | Terminate a subscription. |
| Notification endpoint | (client-defined) | POST | See note | Notify about log management related events. See note. |
| | | GET | See note | Test the notification endpoint. See note. |
| NOTE: | The NFV-MANO functional entity shall support invoking the HTTP methods defined for the "Notification endpoint" resource exposed by the API consumer. If the API consumer supports invoking the POST method on the "Subscriptions" resource towards the NFV-MANO functional entity, it shall also support responding to the HTTP requests defined for the "Notification endpoint" resource. | | | |

8.4 Sequence diagrams

8.4.1 Flow of creating a logging job

This clause describes a sequence for creating a logging job.

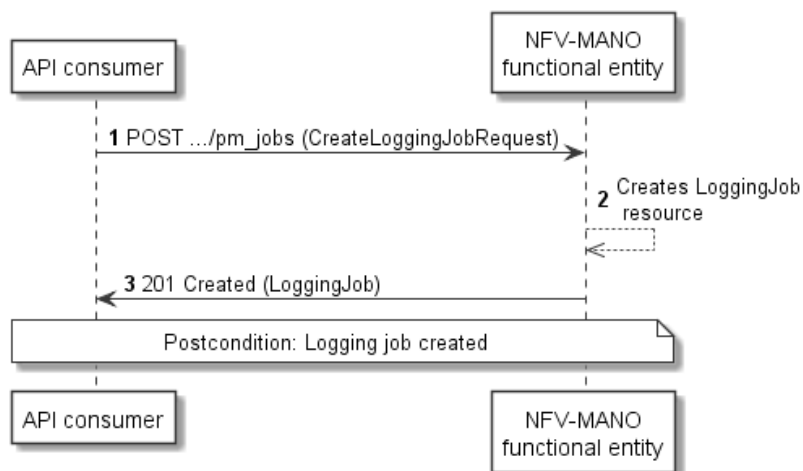


Figure 8.4.1-1: Flow of logging job creation

Logging job creation, as illustrated in figure 8.4.1-1, consists of the following steps:

- 1) If the API consumer intends to create a logging job, it sends a POST request to the "Logging jobs" resource, including one data structure of type "CreateLoggingJobRequest" in the message content.
- 2) The NFV-MANO functional entity creates a logging job instance.
- 3) The NFV-MANO functional entity returns a "201 Created" response to the API consumer, and includes in the message content a representation of the logging job just created.

Postcondition: Upon successful completion, the logging job has been created.

Error handling: In case of failure, appropriate error information is provided in the response.

8.4.2 Flow of querying/reading logging jobs

This clause describes a sequence for querying/reading logging jobs.

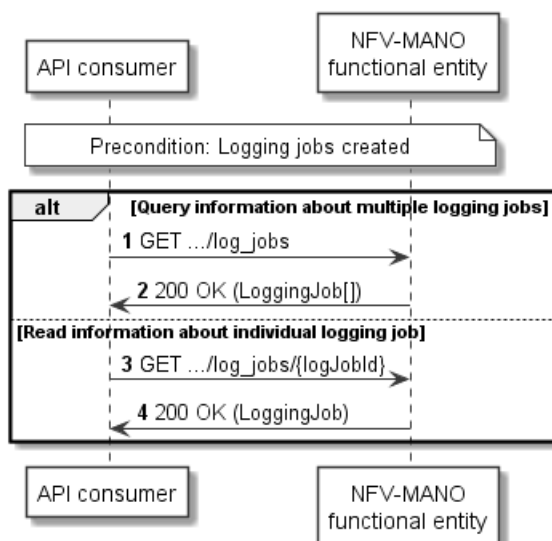


Figure 8.4.2-1: Flow of logging jobs query/read

Logging jobs query/read, as illustrated in figure 8.4.2-1, consists of the following steps:

Precondition: Logging jobs have been created.

- 1) If the API consumer intends to query all logging jobs, it sends a GET request to the "Logging jobs" resource.

- 2) In case of step 1), the NFV-MANO functional entity returns a "200 OK" response to the API consumer, and includes zero or more data structures of type "LoggingJob" in the message content.
- 3) If the API consumer intends to read information about a particular logging job, it sends a GET request to the "Individual logging job" resource, addressed by the appropriate logging job identifier in its resource URI.
- 4) In case of step 3), the NFV-MANO functional entity returns a "200 OK" response to the API consumer, and includes one data structure of type "LoggingJob" in the message content.

Error handling: In case of failure, appropriate error information is provided in the response.

8.4.3 Flow of deleting a logging job

This clause describes a sequence for deleting a logging management job.

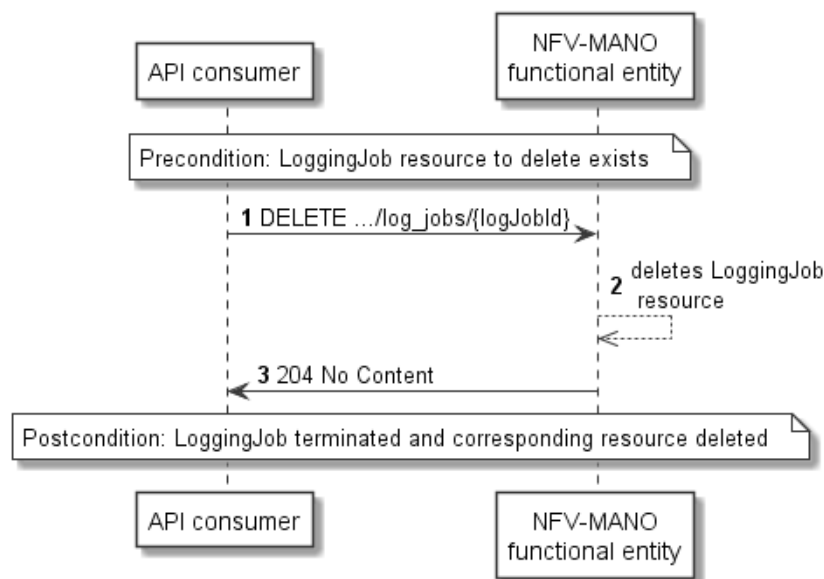


Figure 8.4.3-1: Flow of logging job deletion

Logging job deletion, as illustrated in figure 8.4.3-1, consists of the following steps:

Precondition: The logging job resource to delete exists.

- 1) If the API consumer intends to delete a logging job, it sends a DELETE request to the "Individual logging job" resource, addressed by the appropriate logging job identifier in its resource URI.
- 2) The NFV-MANO functional entity deletes the logging job resource.
- 3) The NFV-MANO functional entity returns a response with a "204 No Content" response code and an empty message content to the API consumer.

Postcondition: The logging job has been terminated and the corresponding logging job resource deleted.

Error handling: In case of failure, appropriate error information is provided in the response.

8.4.4 Flow of obtaining log reports

This clause describes the procedure for obtaining log reports.

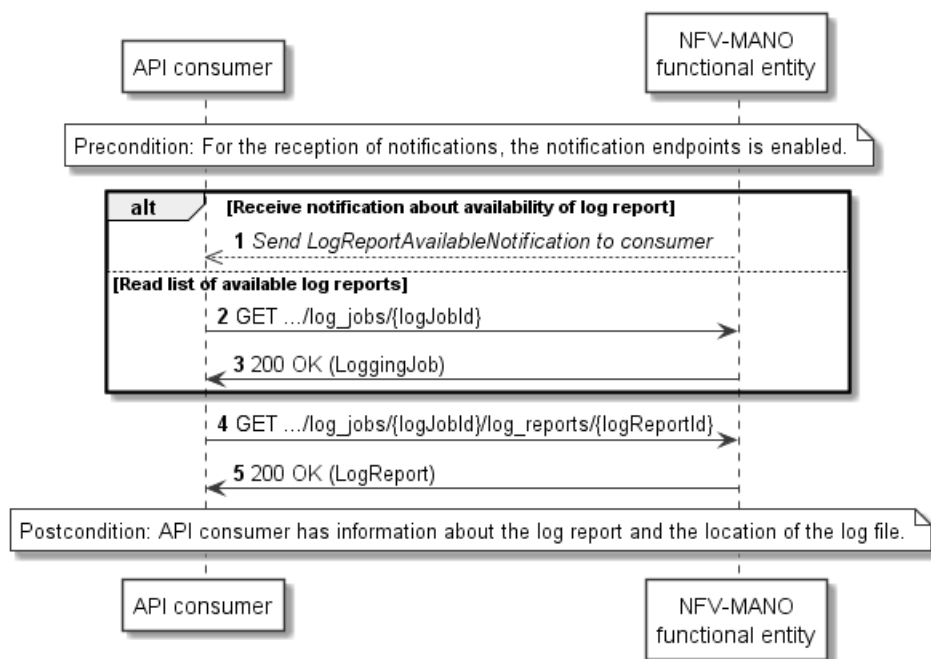


Figure 8.4.4-1: Flow of obtaining log reports

The procedure of obtaining log reports consists of the following steps as illustrated in figure 8.4.4-1:

Precondition: For the reception of notifications, the notification endpoint URI shall be enabled.

- 1) The NFV-MANO functional entity sends to the API consumer a `LogReportAvailableNotification` that indicates the availability of a new log report, including a link from which the log report can be obtained.
- 2) Alternatively, the API consumer sends a GET request to the "Individual logging job" resource to obtain a representation of the resource with information about the log reports that are available for this logging job, including their URIs.
- 3) In case of step 2), the NFV-MANO functional entity returns a "200 OK" response to the API consumer and includes a data structure of type "LoggingJob" in the message content with the information about the log reports that are available for this logging job, including their URIs.
- 4) The API consumer sends to the NFV-MANO functional entity a GET request to the URI obtained either in step 1) or step 3) in order to read an "Individual log report" resource.
- 5) The NFV-MANO functional entity returns a "200 OK" response to the API consumer and includes a data structure of type "LogReport" in the message content.

Postcondition: The API consumer has information about the log report and the location for obtaining the log file.

Error handling: The NFV-MANO functional entity provides in the response messages appropriate error information that reports an erroneous query request.

8.4.5 Flow of managing subscriptions

This clause describes the procedure for creating, reading and terminating subscriptions to notifications related to NFV-MANO log management.

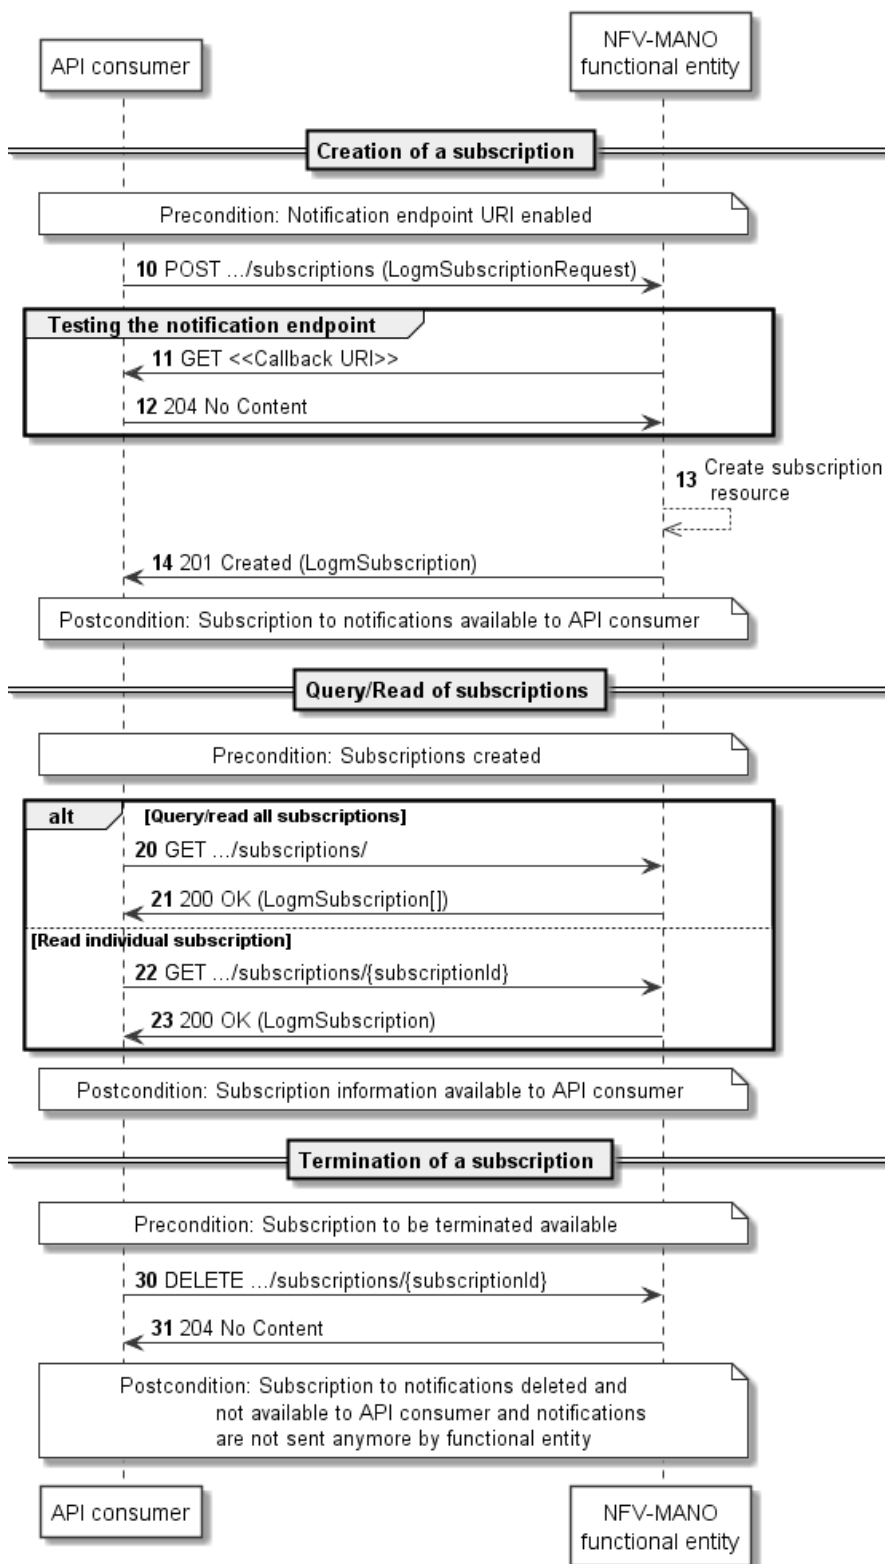


Figure 8.4.5-1: Flow of managing subscriptions

A) Procedure of creating subscriptions

The procedure of creating subscriptions consists of the following steps as illustrated in figure 8.4.5-1:

Precondition: The notification endpoint URI is enabled.

- 10) The API consumer sends a POST request to the "Subscriptions" resource including in the message content a data structure of type "LogmSubscriptionRequest". This data structure contains filtering criteria and a client side URI to which the NFV-MANO functional entity will subsequently send notifications about events that match the filter.
- 11) To test the notification endpoint that was registered by the API consumer as part of the subscription, the NFV-MANO functional entity sends a GET request to the notification endpoint URI.
- 12) The API consumer returns a "204 No Content" response to indicate success.
- 13) The NFV-MANO functional entity creates a new subscription for notifications related to NFV-MANO log management, and a resource that represents this subscription.
- 14) The NFV-MANO functional entity returns a "201 Created" response containing a data structure of type "LogmSubscription", representing the subscription resource just created by the NFV-MANO functional entity, and provides the URI of the newly-created resource in the "Location" HTTP header.

Postcondition: The subscription to notifications related to NFV-MANO log management is available to the API consumer.

Error handling: The NFV-MANO functional entity rejects a subscription if the subscription information is not valid: invalid notification endpoint, subscription information is malformed, etc.

B) Procedure of querying/reading subscriptions

The procedure of querying/reading subscriptions consists of the following steps, as illustrated in figure 8.4.5-1:

Precondition: Subscriptions have been created.

- 20) Optionally, for example when trying to recover from an error situation, the API consumer may query information about its subscriptions by sending a GET request to the "Subscriptions" resource.
- 21) In case of step 20), the NFV-MANO functional entity returns a "200 OK" response that contains the list of representations of all existing subscriptions that were created by the API consumer.
- 22) Optionally, for example when trying to recover from an error situation, the API consumer may read information about a particular subscription by sending a GET request to the resource representing that individual subscription.
- 23) In case of step 22), the NFV-MANO functional entity returns a "200 OK" response that contains a representation of that individual subscription.

Postcondition: The subscription information is available to the API consumer.

Error handling: The NFV-MANO functional entity provides in the response message appropriate error information that reports an erroneous query request.

C) Procedure of terminating a subscription

The procedure of terminating a subscription consists of the following steps, as illustrated in figure 8.4.5-1:

Precondition: The subscription to be terminated is available.

- 30) When the API consumer does not need the subscription anymore, it terminates the subscription by sending a DELETE request to the resource that represents the individual subscription.
- 31) The NFV-MANO functional entity acknowledges the successful termination of the subscription by returning a "204 No Content" response.

Postcondition: The subscription to notifications related to NFV-MANO log management is deleted and not available to the API consumer, and notifications associated to this subscription are not sent anymore by the NFV-MANO functional entity.

Error handling: The NFV-MANO functional entity provides in the response message appropriate error information that reports an erroneous termination request: the subscription to terminate is not available, etc.

8.4.6 Flow of sending notifications

This clause describes the procedure for sending notifications related to NFV-MANO log management.

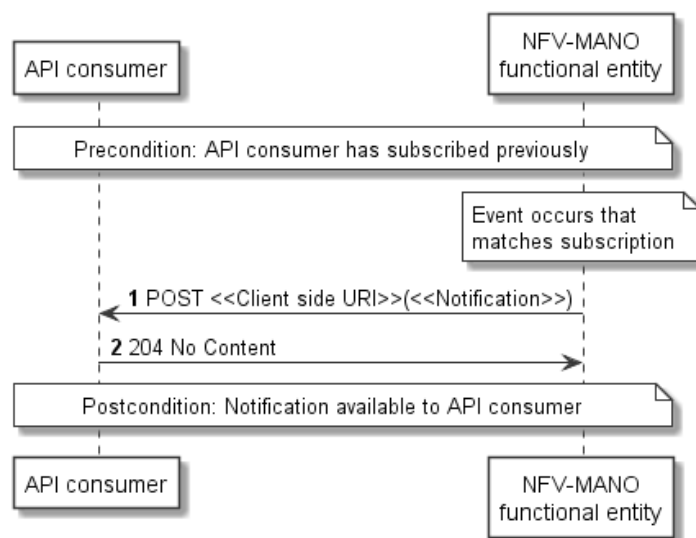


Figure 8.4.6-1: Flow of sending notifications

The procedure consists of the following steps as illustrated in figure 8.4.6-1:

Precondition: The API consumer has subscribed previously for notifications related to NFV-MANO log management and the NFV-MANO functional entity has thus a related subscription.

- 1) If an event occurs that matches the filtering criteria which are part of the subscription, the NFV-MANO functional entity generates a notification that includes information about the event, and sends it in the body of a POST request to the URI which the API consumer has registered as part of the subscription request. The variable <<Notification>> in the flow is a placeholder for the different types of notifications that can be sent by this API.
- 2) The API consumer acknowledges the successful delivery of the notification by returning a "204 No Content" response.

Postcondition: The notification is available to the API consumer.

Error handling: If the NFV-MANO functional entity does not receive the "204 No Content" response from the API consumer, it can retry sending the notification.

8.4.7 Flow of on-demand request to compile log data into file

This clause describes the procedure for performing the on-demand compilation of log data into a file. The procedure can be synchronous or asynchronous depending on whether the NFV-MANO functional entity can compile the log data and create the log report immediately.

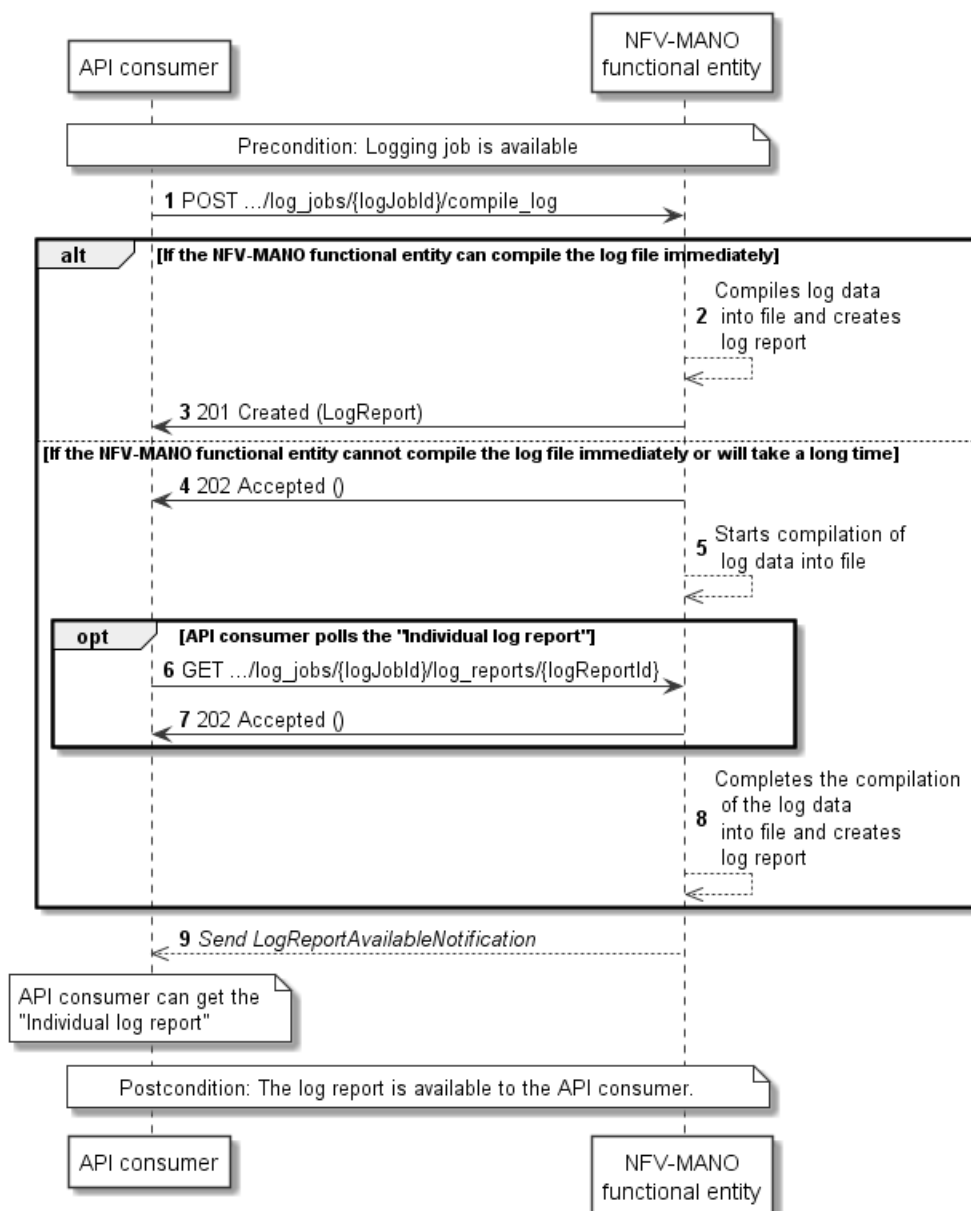


Figure 8.4.7-1: Flow of on-demand request to compile log data into file

The procedure consists of the following steps as illustrated in figure 8.4.7-1:

Precondition: The logging job is available.

- 1) The API consumers sends a POST request to the "compile log task" resource, and includes in the message content a data structure of type "CompileLogFileRequest".
- 2) If the NFV-MANO functional entity can process the compile log file request and compile the log file immediately, it compiles such a file and generates the associated log report (synchronous mode).
- 3) In case of 2), the NFV-MANO functional entity returns a "201 Created" response to indicate the completion of the operation, and includes in the message content a data structure of type "LogReport".
- 4) Alternatively to step 2), if the NFV-MANO functional entity cannot compile the log file immediately or the NFV-MANO functional entity knows that the compilation will take some time, the NFV-MANO functional entity returns to the API consumer a "202 Accepted" response with an empty body and a "Location" HTTP header that indicates the URI of the "Individual log report" resource that will be created once the compilation is completed (asynchronous mode).
- 5) The NFV-MANO functional entity starts the compilation of the log data into a file.

- 6) Optionally, the API consumer can send a GET request to the NFV-MANO functional entity using the URI in the "Location" header that was returned in step 4).
- 7) As there is no result of the compilation of the log file and consequently the "Individual log report" resource is still in the process of being created, the NFV-MANO functional entity returns a "202 Accepted" response with an empty body.
- 8) The NFV-MANO functional entity completes the compilation of the log data into the log file and generates the associated log report.
- 9) The NFV-MANO functional entity sends to the API consumer a LogReportAvailableNotification to indicate the availability of the log report resource.

NOTE 1: Due to possible race conditions, the "201 Created" response and the LogReportAvailableNotification can arrive in any order at the API consumer.

NOTE 2: In synchronous case, the API consumer can get the "Individual log report" from the response body or as defined in clause 8.4.4. In asynchronous case, the "Individual log report" can be obtained with the procedure defined in clause 8.4.4.

Postcondition: The log report is available to the API consumer.

Error handling: If the compilation of the log file and reporting fails, the NFV-MANO functional entity provides in the response appropriate error information.

8.5 Resources

8.5.1 Introduction

This clause defines all the resources and methods provided by the NFV-MANO log management interface.

8.5.2 Resource: API versions

The "API versions" resources as defined in clause 9.3.3 of ETSI GS NFV-SOL 013 [4] are part of the NFV-MANO log management interface.

8.5.3 Resource: Logging jobs

8.5.3.1 Description

This resource represents logging jobs. The API consumer can use this resource to create and query logging jobs.

8.5.3.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanologm/{apiMajorVersion}/log_jobs

This resource shall support the resource URI variables defined in table 8.5.3.2-1.

Table 8.5.3.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 8.2. |

8.5.3.3 Resource methods

8.5.3.3.1 POST

The POST method creates a logging job.

This method shall follow the provisions specified in tables 8.5.3.3.1-1 and 8.5.3.3.1-2 for URI query parameters, request and response data structures, and response codes.

As the result of successfully executing this method, a new "Individual logging job" resource as defined in clause 8.5.4 shall have been created.

Table 8.5.3.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 8.5.3.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|-------------------------|-----------------------|-------------------------------|--|
| | CreateLoggingJobRequest | 1 | Logging job creation request. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | LoggingJob | 1 | 201 Created | <p>Shall be returned when the logging job has been created successfully.</p> <p>The response body shall contain a representation of the created "Individual Logging job" resource, as defined in clause 8.6.2.6.</p> <p>The HTTP response shall include a "Location" HTTP header that points to the created "Individual logging job" resource.</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

8.5.3.3.2 GET

The API consumer can use this method to retrieve information about logging jobs.

This method shall follow the provisions specified in tables 8.5.3.3.2-1 and 8.5.3.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 8.5.3.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|------------|-------------|--|
| filter | 0..1 | <p>Attribute-based filtering expression according to clause 5.2 of ETSI GS NFV-SOL 013 [4].</p> <p>The NFV-MANO functional entity shall support receiving this parameter as part of the URI query string. The API consumer may supply this parameter.</p> <p>All attribute names that appear in the LoggingJob and in data types referenced from it shall be supported by the NFV-MANO functional entity in the filter expression.</p> |
| all_fields | 0..1 | Include all complex attributes in the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity shall support this parameter. |
| fields | 0..1 | Complex attributes to be included into the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity should support this parameter. |

| Name | Cardinality | Description |
|------------------------|-------------|---|
| exclude_fields | 0..1 | Complex attributes to be excluded from the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity should support this parameter. |
| exclude_default | 0..1 | <p>Indicates to exclude the following complex attributes from the response. See clause 5.3 of ETSI GS NFV-SOL 013 [4] for details. The NFV-MANO functional entity shall support this parameter.</p> <p>The following attributes shall be excluded from the LoggingJob structure in the response body if this parameter is provided, or none of the parameters "all_fields", "fields", "exclude_fields", "exclude_default" are provided:</p> <ul style="list-style-type: none"> • logReports. |
| nextpage_opaque_marker | 0..1 | Marker to obtain the next page of a paged response. Shall be supported by the NFV-MANO functional entity if the NFV-MANO functional entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource. |

Table 8.5.3.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|-----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | LoggingJob | 0..N | 200 OK | <p>Shall be returned when information about zero or more logging jobs has been queried successfully.</p> <p>The response body shall contain in an array the representations of zero or more logging jobs, as defined in clause 8.6.2.6.</p> <p>If the "filter" URI parameter or one of the "all_fields", "fields" (if supported), "exclude_fields" (if supported) or "exclude_default" URI parameters was supplied in the request, the data in the response body shall have been transformed according to the rules specified in clauses 5.2.2 and 5.3.2 of ETSI GS NFV-SOL 013 [4], respectively.</p> <p>If the NFV-MANO functional entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, inclusion of the Link HTTP header in this response shall follow the provisions in clause 5.4.2.3 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute-based filtering expression.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute selector.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Response too big.</p> <p>If the NFV-MANO functional entity supports alternative 1 (error) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, this error response shall follow the provisions in clause 5.4.2.2 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

8.5.3.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.3.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.3.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.4 Resource: Individual logging job

8.5.4.1 Description

This resource represents an individual logging job. The API consumer can use this resource to delete and read the underlying logging job.

8.5.4.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanologm/{apiMajorVersion}/log_jobs/{logJobId}

This resource shall support the resource URI variables defined in table 8.5.4.2-1.

Table 8.5.4.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|---|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 8.2. |
| logJobId | Identifier of the logging job. See note. |
| NOTE: | This identifier can be retrieved from the resource referenced by the "Location" HTTP header in the response to a POST request creating a new "Individual logging job" resource. It can also be retrieved from the "id" attribute in the message content of that response. |

8.5.4.3 Resource methods

8.5.4.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.4.3.2 GET

The API consumer can use this method for reading an individual logging job.

This method shall follow the provisions specified in tables 8.5.4.3.2-1 and 8.5.4.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 8.5.4.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 8.5.4.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | LoggingJob | 1 | 200 OK | Shall be returned when information about an individual logging job has been read successfully. The response body shall contain a representation of the "Individual logging job" resource, as defined in clause 8.6.2.6. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

8.5.4.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.4.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.4.3.5 DELETE

This method terminates an individual logging job.

This method shall follow the provisions specified in tables 8.5.4.3.5-1 and 8.5.4.3.5-2 for URI query parameters, request and response data structures, and response codes.

As the result of successfully executing this method, the "Individual logging job" resource shall not exist any longer.

Table 8.5.4.3.5-1: URI query parameters supported by the DELETE method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 8.5.4.3.5-2: Details of the DELETE request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | <p>Shall be returned when the logging job has been deleted successfully.</p> <p>The response body shall be empty.</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

8.5.5 Resource: Individual log report

8.5.5.1 Description

This resource represents an individual log report. The API consumer can use this resource to read information about a log report.

The log report provides metadata information about a log and location information of the log file from where it can be obtained.

NOTE: The present document does not specify the mechanism how to retrieve the log files.

8.5.5.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanologm/{apiMajorVersion}/log_jobs/{logJobId}/log_reports/{logReportId}

This resource shall support the resource URI variables defined in table 8.5.5.2-1.

Table 8.5.5.2-1: Resource URI variables for this resource

| Name | Definition |
|--|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 8.2. |
| logJobId | Identifier of the logging job. See note 1. |
| logReportId | Identifier of the log report. See note 2. |
| NOTE 1: This identifier can be retrieved from the resource referenced by the "Location" HTTP header in the response to a POST request creating a new logging job resource. It can also be retrieved from the "id" attribute in the message content of that response. | |
| NOTE 2: This identifier can be retrieved from: a) the "logReportsIds" attribute of the applicable element in the message content of the response to a GET request to a logging job (see clause 8.6.2.6), and b) the "logReport" attribute available from a LogReportAvailableNotification. | |

8.5.5.3 Resource methods

8.5.5.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.5.3.2 GET

The API consumer can use this method for reading an individual log report.

This method shall follow the provisions specified in tables 8.5.5.3.2-1 and 8.5.5.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 8.5.5.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 8.5.5.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|---|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | LogReport | 1 | 200 OK | Shall be returned when information of an individual log report has been read successfully. The response body shall contain a representation of the "Individual log report" resource, as defined in clause 8.6.2.7. |
| | n/a | | 202 Accepted | Shall be returned if the creation of the log report is ongoing and no log report is available yet (applicable in asynchronous mode of the "Compile log task" resource). The response body shall be empty. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

8.5.5.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.5.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.5.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.6 Resource: Compile log task

8.5.6.1 Description

This resource represents the "Compile log" operation. The API consumer can use this resource to request compiling the logged data, collected via a logging job, into a file and creating the associated log report.

As the result of successfully processing this request, a new "Individual log report" resource shall be created. Two modes of operation, synchronous or asynchronous, can take place depending on whether the NFV-MANO functional entity can compile the log data and create the log report immediately. In the synchronous case, which is indicated by responding with "201 Created", the resource shall be created before the "201 Created" response is returned. In the asynchronous case, which is indicated by responding with "202 Accepted", the resource may be created after the response is returned.

8.5.6.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanologm/{apiMajorVersion}/log_jobs/{logJobId}/compile_log

This resource shall support the resource URI variables defined in table 8.5.6.2-1.

Table 8.5.6.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 4.1 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 8.2. |
| logJobId | Identifier of the logging job. See note. |
| NOTE: | This identifier can be retrieved from the resource referenced by the "Location" HTTP header in the response to a POST request creating a new logging job resource. It can also be retrieved from the "id" attribute in the message content of that response. |

8.5.6.3 Resource methods

8.5.6.3.1 POST

The POST method requests to compile the logged data into a file and create an associated log report.

This method shall follow the provisions specified in tables 8.5.6.3.1-1 and 8.5.6.3.1-2 for URI query parameters, request and response data structures, and response codes.

Table 8.5.6.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 8.5.6.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-----------------------|-------------|---|--|
| | CompileLogRequest | 1 | Log compilation request. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | LogReport | 1 | 201 Created | <p>Shall be returned for a successful compilation of the log data and creation of the associated log report (synchronous mode).</p> <p>The response body shall contain a representation of the log report resource, as defined in clause 8.6.2.7.</p> <p>The HTTP response shall include a "Location" HTTP header that indicate the URI of the "Individual log report" resource just created.</p> |
| | n/a | | 202 Accepted | <p>Shall be returned when the request has been accepted for processing, and it is expected to take some time to compile the log file and create the associated log report (asynchronous mode).</p> <p>The response body shall be empty.</p> <p>The HTTP response shall include a "Location" HTTP header that indicates the URI of the "Individual log report" resource that will be created once the log file compilation is completed.</p> |
| | n/a | | 303 See other | <p>Shall be returned when a log data compilation and report creation is already ongoing, or a log report has just been created, for the specified logging job at the time of processing the request.</p> <p>The response body shall be empty.</p> <p>The HTTP response shall include a "Location" HTTP header that contains the resource URI of the log report resource just created, or to be created by the ongoing compilation and report creation.</p> |
| | ProblemDetails | 1 | 422 Unprocessable Content | <p>The general cause for this error and its handling is specified in clause 6.4 of ETSI GS NFV-SOL 013 [4], including rules for the presence of the response body.</p> <p>Specifically, in case of this task resource, the response code 422 shall also be returned if the "objectInstanceid" value provided in the message content of the request does not correspond to an object instance for which log data is being collected by the logging job represented by this resource.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | <p>In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned.</p> | |

8.5.6.3.2 GET

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.6.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.6.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.6.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.7 Resource: Subscriptions

8.5.7.1 Description

This resource represents subscriptions. The client can use this resource to subscribe to notifications related to NFV-MANO log management and to query its subscriptions.

8.5.7.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanologm/{apiMajorVersion}/subscriptions

This resource shall support the resource URI variables defined in table 8.5.7.2-1.

Table 8.5.7.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 6.4 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 8.2. |

8.5.7.3 Resource methods

8.5.7.3.1 POST

The POST method creates a new subscription.

This method shall follow the provisions specified in tables 8.5.7.3.1-1 and 8.5.7.3.1-2 for URI query parameters, request and response data structures, and response codes.

As the result of successfully executing this method, a new "Individual subscription" resource as defined in clause 8.5.8 shall have been created. This method shall not trigger any notification.

Creation of two "Individual subscription" resources with the same callbackURI and the same filter can result in performance degradation and will provide duplicates of notifications to the API consumer, and might make sense only in very rare use cases. Consequently, the NFV-MANO functional entity may either allow creating a new "Individual subscription" resource if another "Individual subscription" resource with the same filter and callbackUri already exists (in which case it shall return the "201 Created" response code), or may decide to not create a duplicate "Individual subscription" resource (in which case it shall return a "303 See Other" response code referencing the existing "Individual subscription" resource with the same filter and callbackUri).

Table 8.5.7.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 8.5.7.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|----------------|-------------------------|-------------|--|--|
| | LogmSubscriptionRequest | 1 | Details of the subscription to be created. | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | LogmSubscription | 1 | 201 Created | <p>Shall be returned when the subscription has been created successfully.</p> <p>A representation of the created "Individual subscription" resource shall be returned in the response body, as defined in clause 8.6.2.3.</p> <p>The HTTP response shall include a "Location" HTTP header that contains the resource URI of the created "Individual subscription" resource.</p> |
| | n/a | | 303 See Other | <p>Shall be returned when a subscription with the same callbackURI and the same filter already exists and the policy of the NFV-MANO functional entity is to not create redundant subscriptions.</p> <p>The HTTP response shall include a "Location" HTTP header that contains the resource URI of the existing "Individual subscription" resource.</p> <p>The response body shall be empty.</p> |
| | ProblemDetails | 1 | 422 Unprocessable Content | <p>Shall be returned upon the following error: The content type of the message content is supported and the message content of a request contains syntactically correct data but the data cannot be processed.</p> <p>The general cause for this error and its handling is specified in clause 6.4 of ETSI GS NFV-SOL 013 [4], including rules for the presence of the response body.</p> <p>Specifically in case of this resource, the response code 422 shall also be returned if the API producer has tested the Notification endpoint as described in clause 8.5.9.3.2 and the test has failed.</p> <p>In this case, the "detail" attribute in the "ProblemDetails" structure shall convey more information about the error.</p> |
| ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. | |

8.5.7.3.2 GET

The API consumer can use this method to query the list of active subscriptions to log management notifications subscribed by the API consumer.

This method shall follow the provisions specified in tables 8.5.7.3.2-1 and 8.5.7.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 8.5.7.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|------------------------|-------------|--|
| filter | 0..1 | <p>Attribute-based filtering expression according to clause 5.2 of ETSI GS NFV-SOL 013 [4].</p> <p>The NFV-MANO functional entity shall support receiving this parameter as part of the URI query string. The API consumer may supply this parameter.</p> <p>All attribute names that appear in the LogmSubscription and in data types referenced from it shall be supported by the NFV-MANO functional entity in the filter expression.</p> |
| nextpage_opaque_marker | 0..1 | <p>Marker to obtain the next page of a paged response. Shall be supported by the NFV-MANO functional entity if the NFV-MANO functional entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource.</p> |

Table 8.5.7.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|------------------|-----------------------|-----------------|---|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | LogmSubscription | 0..N | 200 OK | <p>Shall be returned when the list of subscriptions has been queried successfully.</p> <p>The response body shall contain in an array the representations of all active subscriptions of the functional block that invokes the method, i.e. zero or more representations of log management subscriptions as defined in clause 8.6.2.3.</p> <p>If the "filter" URI parameter was supplied in the request, the data in the response body shall have been transformed according to the rules specified in clause 5.2.2 of ETSI GS NFV-SOL 013 [4].</p> <p>If the NFV-MANO functional entity supports alternative 2 (paging) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, inclusion of the Link HTTP header in this response shall follow the provisions in clause 5.4.2.3 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Invalid attribute-based filtering expression.</p> <p>The response body shall contain a ProblemDetails structure, in which the "detail" attribute should convey more information about the error.</p> |
| | ProblemDetails | 1 | 400 Bad Request | <p>Shall be returned upon the following error: Response too big.</p> <p>If the NFV-MANO functional entity supports alternative 1 (error) according to clause 5.4.2.1 of ETSI GS NFV-SOL 013 [4] for this resource, this error response shall follow the provisions in clause 5.4.2.2 of ETSI GS NFV-SOL 013 [4].</p> |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | <p>In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned.</p> |

8.5.7.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.7.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.7.3.5 DELETE

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.8 Resource: Individual subscription

8.5.8.1 Description

This resource represents an individual subscription for notifications about log management related events.

The API consumer can use this resource to read and to terminate a subscription to notifications related to NFV-MANO log management.

8.5.8.2 Resource definition

The resource URI is:

{apiRoot}/nfvmanolog/{apiMajorVersion}/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 8.5.8.2-1.

Table 8.5.8.2-1: Resource URI variables for this resource

| Name | Definition |
|-----------------|--|
| apiRoot | See clause 6.4 of ETSI GS NFV-SOL 013 [4]. |
| apiMajorVersion | See clause 8.2. |
| subscriptionId | Identifier of the subscription. See note. |
| NOTE: | This identifier can be retrieved from the resource referenced by the "Location" HTTP header in the response to a POST request creating a new "Individual subscription" resource. It can also be retrieved from the "id" attribute in the message content of that response. |

8.5.8.3 Resource methods

8.5.8.3.1 POST

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.8.3.2 GET

The API consumer can use this method for reading an individual subscription about log management notifications subscribed by the API consumer.

This method shall follow the provisions specified in tables 8.5.8.3.2-1 and 8.5.8.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 8.5.8.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 8.5.8.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|------------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | LogmSubscription | 1 | 200 OK | Shall be returned when the subscription has been read successfully. The response body shall contain a representation of the "Individual subscription" resource, as defined in clause 8.6.2.3. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

8.5.8.3.3 PUT

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.8.3.4 PATCH

This method is not supported. When this method is requested on this resource, the NFV-MANO functional entity shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.8.3.5 DELETE

This method terminates an individual subscription.

This method shall follow the provisions specified in tables 8.5.8.3.5-1 and 8.5.8.3.5-2 for URI query parameters, request and response data structures, and response codes.

As the result of successfully executing this method, the "Individual subscription" resource shall not exist any longer. This means that no notifications for that subscription shall be sent to the formerly-subscribed API consumer.

NOTE: Due to race conditions, some notifications might still be received by the formerly-subscribed API consumer for a certain time period after the deletion.

Table 8.5.8.3.5-1: URI query parameters supported by the DELETE method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 8.5.8.3.5-2: Details of the DELETE request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | Shall be returned when the "Individual subscription" resource has been deleted successfully. The response body shall be empty. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

8.5.9 Resource: Notification endpoint

8.5.9.1 Description

This resource represents a notification endpoint for NFV-MANO log management.

The API producer can use this resource to send notifications related to log management events to a subscribed API consumer, which has provided the URI of this resource during the subscription process.

8.5.9.2 Resource definition

The resource URI is provided by the client when creating the subscription.

This resource shall support the resource URI variables defined in table 8.5.9.2-1.

Table 8.5.9.2-1: Resource URI variables for this resource

| Name | Definition |
|------|------------|
| n/a | |

8.5.9.3 Resource methods

8.5.9.3.1 POST

The POST method delivers a notification regarding a log management event from the API producer to the API consumer. The API consumer shall have previously created an "Individual subscription" resource with a matching filter.

This method shall follow the provisions specified in tables 8.5.9.3.1-1 and 8.5.9.3.1-2 for URI query parameters, request and response data structures, and response codes.

Table 8.5.9.3.1-1: URI query parameters supported by the POST method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 8.5.9.3.1-2: Details of the POST request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|--------------------------------|-----------------------|----------------|--|
| | LogReportAvailableNotification | | 1 | Notification about the availability of a log report. |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | Shall be returned when the notification has been delivered successfully. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

8.5.9.3.2 GET

The GET method allows the API producer to test the notification endpoint that is provided by the API consumer, e.g. during subscription.

This method shall follow the provisions specified in tables 8.5.9.3.2-1 and 8.5.9.3.2-2 for URI query parameters, request and response data structures, and response codes.

Table 8.5.9.3.2-1: URI query parameters supported by the GET method on this resource

| Name | Cardinality | Description |
|----------------|-------------|-------------|
| none supported | | |

Table 8.5.9.3.2-2: Details of the GET request/response on this resource

| Request body | Data type | Cardinality | Description | |
|---------------|----------------|-----------------------|----------------|--|
| | n/a | | | |
| Response body | Data type | Cardinality | Response Codes | Description |
| | n/a | | 204 No Content | Shall be returned to indicate that the notification endpoint has been tested successfully. The response body shall be empty. |
| | ProblemDetails | See clause 6.4 of [4] | 4xx/5xx | In addition to the response codes defined above, any common error response code as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4] may be returned. |

8.5.9.3.3 PUT

This method is not supported. When this method is requested on this resource, the API consumer shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.9.3.4 PATCH

This method is not supported. When this method is requested on this resource, the API consumer shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.5.9.3.5 DELETE

This method is not supported. When this method is requested on this resource, the API consumer shall return a "405 Method Not Allowed" response as defined in clause 6.4 of ETSI GS NFV-SOL 013 [4].

8.6 Data model

8.6.1 Introduction

This clause defines the request and response data structures of the NFV-MANO log management interface. If a request or response contains attributes not defined in the present document, a receiving functional block that does not understand these attributes shall not treat their presence as an error, and may choose to ignore them.

8.6.2 Resource and notification data types

8.6.2.1 Introduction

This clause defines the data structures to be used in resource representations and notifications.

8.6.2.2 Type: LogmSubscriptionRequest

This type represents a subscription request. It shall comply with the provisions defined in table 8.6.2.2-1.

Table 8.6.2.2-1: Definition of the LogmSubscriptionRequest data type

| Attribute name | Data type | Cardinality | Description |
|----------------|----------------------------|-------------|--|
| filter | LogmNotificationsFilter | 0..1 | Filter settings for this subscription, to define the subset of all notifications this subscription relates to. A particular notification is sent to the subscriber if the filter matches, or if there is no filter. |
| callbackUri | Uri | 1 | The URI of the endpoint to send the notification to. |
| authentication | SubscriptionAuthentication | 0..1 | Authentication parameters to configure the use of Authorization when sending notifications corresponding to this subscription, as defined in clause 8.3.4 of ETSI GS NFV-SOL 013 [4]. This attribute shall only be present if the subscriber requires authorization of notifications. |

8.6.2.3 Type: LogmSubscription

This type represents a subscription. It shall comply with the provisions defined in table 8.6.2.3-1.

Table 8.6.2.3-1: Definition of the LogmSubscription data type

| Attribute name | Data type | Cardinality | Description |
|----------------|-------------------------|-------------|---|
| id | Identifier | 1 | Identifier that identifies the subscription. |
| filter | LogmNotificationsFilter | 0..1 | Filter settings for this subscription, to define the subset of all notifications this subscription relates to. A particular notification is sent to the subscriber if the filter matches, or if there is no filter. |
| callbackUri | Uri | 1 | The URI of the endpoint to send the notification to. |
| _links | Structure (inlined) | 1 | Links to resources related to this resource. |
| >self | Link | 1 | URI of this resource. |

8.6.2.4 Type: LogReportAvailableNotification

This notification informs the receiver that the log report of the NFV-MANO functional entity is available. It shall comply with the provisions defined in table 8.6.2.4-1.

The notification shall be triggered by the NFV-MANO functional entity when log information has been collected by the logging job and the log report is available.

Table 8.6.2.4-1: Definition of the LogReportAvailableNotification data type

| Attribute name | Data type | Cardinality | Description |
|------------------|----------------------------|-------------|---|
| id | Identifier | 1 | Identifier of this notification. If a notification is sent multiple times due to multiple subscriptions, the "id" attribute of all these notifications shall have the same value. |
| notificationType | String | 1 | Discriminator for the different notification types. Shall be set to "LogReportAvailableNotification" for this notification type. |
| subscriptionId | Identifier | 1 | Identifier of the subscription that this notification relates to. |
| timeStamp | DateTime | 1 | Date and time of the generation of the notification. |
| objectInstanceid | ManoManagedObjectReference | 1 | Identifier that identifies the object instance for which the log report is available. This attribute shall contain the identifier of the logged object according to their type. |
| links | Structure (inlined) | 1 | Links to resources related to this notification. |
| >subscription | NotificationLink | 1 | Link to the related subscription. |
| >objectInstance | NotificationLink | 0..1 | Link to the resource representing the measured object instance to which the notified change applies. Shall be present if the measured object instance information is accessible as a resource. |
| >LoggingJob | NotificationLink | 1 | Link to the resource that represents the logging job for which the log report is available. |
| >logReports | NotificationLink | 1..N | Link from which the available log report can be obtained. Due to the relationship of the logging job compilation and the logging information availability reporting, more than one logReport notification link can be provided. |

8.6.2.5 Type: CreateLoggingJobRequest

This type represents a request to create a logging job. It shall comply with the provisions defined in table 8.6.2.5-1.

Table 8.6.2.5-1: Definition of the CreateLoggingJobRequest data type

| Attribute name | Data type | Cardinality | Description |
|-------------------|----------------------------|-------------|---|
| objectInstanceIds | ManoManagedObjectReference | 1..N | Identifiers of the object instance for which logging information is requested to be collected. This attribute shall contain the identifier of the instance of the object to be logged according to their type. If more than one identifier is provided, values shall all refer to object instances of the same type, for which the same criteria is then applicable. |
| jobCriteria | LoggingJobCriteria | 1 | Criteria of the collection of logging information. |
| jobConfig | LoggingJobConfig | 1 | Configuration about the logging job. |

8.6.2.6 Type: LoggingJob

This type represents a logging job. It shall comply with the provisions defined in table 8.6.2.6-1.

Table 8.6.2.6-1: Definition of the LoggingJob data type

| Attribute name | Data type | Cardinality | Description |
|-------------------|----------------------------|-------------|--|
| id | Identifier | 1 | Identifier of this logging job. |
| objectInstanceIds | ManoManagedObjectReference | 1..N | Identifiers of the object instance for which logging information is collected. This attribute shall contain the identifier of the instance of the object that is logged according to their type. |
| jobCriteria | LoggingJobCriteria | 1 | Criteria of the collection of logging information. |
| jobConfig | LoggingJobConfig | 1 | Configuration about the logging job. |
| logReports | Structure (inlined) | 0..N | Information about available log reports created by the logging job. |
| >logReportId | Identifier | 1 | Identifier of the available log report. |
| >logReportLoc | Link | 1 | Link to the available log report. |
| _links | Structure (inlined) | 1 | Links for this resource. |
| >self | Link | 1 | URI of this resource. |
| >objects | Link | 0..N | Links to resources representing the object instances that are logged. Shall be present if the logged object instance information is accessible as a resource. |

8.6.2.7 Type: LogReport

This type represents a log report, which provides information about a compiled log and how to obtain it. It shall comply with the provisions defined in table 8.6.2.7-1.

Table 8.6.2.7-1: Definition of the LogReport data type

| Attribute name | Data type | Cardinality | Description |
|--------------------|----------------------------|-------------|---|
| id | Identifier | 1 | Identifier of this log report. |
| objectInstanceid | ManoManagedObjectReference | 1 | Identifiers of the object instance for which logging information is collected. This attribute shall contain the identifier of the instance of the object that is logged according to their type. |
| compilationTrigger | Enum (inlined) | 1 | The trigger for the compilation of the log file. Permitted values: <ul style="list-style-type: none"> ON_DEMAND: created based on explicit request by a client. AUTOMATIC: created according to the logging job compilation configuration. |
| readyTime | DateTime | 1 | The time when the report and log file was made available. |
| expiryTime | DateTime | 0..1 | The time when the report and log file will expire. |
| fileSize | UnsignedInt | 0..1 | The size of the compiled log file in bytes, if known. |
| fileFormat | String | 1 | The encoding used by the file. |
| fileLocationInfo | Structure (inlined) | 1 | Location and address information of the compiled log file. The consumer can use this information to obtain the compiled log file. |

| Attribute name | Data type | Cardinality | Description |
|--------------------------|---|-------------|--|
| >protocol | Enum (inlined) | 1 | Protocol over which the compiled log file can be retrieved. Permitted values: <ul style="list-style-type: none"> • HTTPS: transmission over HTTP Secure (HTTPS). • SFTP: transmission over SSH file transfer protocol (SFTP). • SCP: transmission over secure copy protocol (SCP). • FTPS: transmission over file transfer protocol secure (FTPS), as specified in IETF RFC 2228 [i.11], using explicit mode as specified in IETF RFC 4217 [i.12]. If FTPS is supported, "private" protection level shall be used. HTTPS shall be supported, and other protocols may be supported. |
| >fileEndpoint | Uri | 1 | The host name (or IP address), optionally a port number (if the host with the compile log file uses a non-standard port number as per the supported transmission protocol), a valid file directory path, and the file name of the compiled log file, or a valid URL. |
| securityAndIntegrityInfo | Structure (inlined) | 1 | Security and integrity information for the compilation of the log files. |
| >algorithm | String | 1 | Algorithm used to generate the hash of the compiled log file. Only SHA-256 and SHA-512 shall be used. |
| >hash | String | 1 | The hexadecimal value of the hash of the compiled log file. The hash shall be computed from the encrypted compiled log file, in case the encryption applies. |
| >encryptionPublicKey | String | 0..1 | Public key used for the encryption of the compiled log file. Shall be present if the compiled log file is encrypted. |
| >cipherAlgorithm | String | 0..1 | The cryptographic algorithm used for the encryption. Shall be present if the compiled log file is encrypted. Valid values are: "AES-CBC-128", "AES-GCM-128", "AES-CBC-256", and "AES-GCM-256", as specified in clause 6.5 of ETSI GS NFV-SEC 012 [12]. |
| >logFileSignature | String | 1 | Signature to the compiled log file generated with the NFV-MANO functional entity's private key, which is used to ensure the authenticity of the compiled log file. The signature shall be applied according to the "encryptAndSignOrder" of the "LoggingJobConfig". See note. |
| >signingCertificate | String | 1 | X.509 certificate with the NFV-MANO functional entity's public key used for verifying the log report and compiled log file signatures. |
| _links | Structure (inlined) | 1 | Links for this resource. |
| >self | Link | 1 | URI of this resource. |
| >object | Link | 0..1 | Link to resource representing the object instance that is logged, which is identified by the corresponding objectInstanceId attribute's value. Shall be present if the logged object instance information is accessible as a resource. |
| NOTE: | It is not specified in the present document how the NFV-MANO functional entity's private key is provided to the NFV-MANO functional entity. | | |

8.6.2.8 Type: CompileLogRequest

This type represents a request to compile the logged data associated to an object instance. It shall comply with the provisions defined in table 8.6.2.8-1.

Table 8.6.2.8-1: Definition of the CompileLogRequest data type

| Attribute name | Data type | Cardinality | Description |
|------------------|----------------------------|-------------|---|
| objectInstanceid | ManoManagedObjectReference | 0..1 | Identifier of the object instance for which logging information is requested to be compiled. The provided value shall correspond to an object instance for which log data is being collected as specified in the corresponding "LoggingJob". If not present, the compile log request is requested for all managed object instances associated to the logging job. |

8.6.3 Referenced structured data types

8.6.3.1 Introduction

This clause defines data structures that can be referenced from data structures defined in the previous clauses, but can neither be resource representations nor bound to any subscribe/notify mechanism.

8.6.3.2 Type: LoggingJobCriteria

This type represents collection criteria for logging jobs. It shall comply with the provisions defined in table 8.6.3.2-1.

Table 8.6.3.2-1: Definition of the LoggingJobCriteria data type

| Attribute name | Data type | Cardinality | Description |
|-------------------|--|-------------|--|
| loggingType | Enum (inlined) | 1 | Type of logging. This defines the types of logged information to collect. Permitted values: <ul style="list-style-type: none"> MESSAGES: logged NFV-MANO service interface messages. SERVICES: logged messages about processes pertaining to NFV-MANO services. SYSTEM: logged messages about the NFV-MANO functional entity's system enabled by the provider. See note. |
| messagesLogDetail | LoggingJobMessagesCriteria | 0..1 | Values for the collection of logged NFV-MANO service interface messages. Shall be present if loggingType="MESSAGES". |
| servicesLogDetail | LoggingJobServicesCriteria | 0..1 | Values for the collection of logged NFV-MANO service messages. Shall be present if loggingType="SERVICES". |
| systemLogDetail | LoggingJobSystemCriteria | 0..1 | Values for the collection of logged messages about the NFV-MANO functional entity's system. Shall be present if loggingType="SYSTEM". |
| NOTE: | The value of the loggingType has dependency on the object that is requested to be logged (refer to the CreateLoggingJobRequest): <ul style="list-style-type: none"> The logging of messages is only applicable to ManoServiceInterface and ConsumedManoInterface objects. | | |

8.6.3.3 Type: LoggingJobMessagesCriteria

This type represents criteria for logging jobs to collect logged messages on NFV-MANO service interfaces. It shall comply with the provisions defined in table 8.6.3.3-1.

Table 8.6.3.3-1: Definition of the LoggingJobMessagesCriteria data type

| Attribute name | Data type | Cardinality | Description |
|--------------------|--------------------|-------------|--|
| direction | Enum (inlined) | 1 | The direction of the interface messages to match. Permitted values: <ul style="list-style-type: none"> • IN: input messages into the interface. • OUT: output messages from the interface. • ALL: both input and output messages into/from the interface. |
| matchingPatterns | Structure (inline) | 0..N | Patterns to be matched in the interface message. If provided, only messages that match all the values provided in the sub-attributes shall be logged. An API consumer can provide more than one "matchingPattern" if combinations of patterns are to be considered to match diverse sets of interface messages. See note. |
| >srcIpAddress | IpAddress | 0..1 | IP address to match the source IP address of request messages to log. The API producer shall support this attribute. |
| >requestMethod | String | 0..1 | HTTP request method to be matched. To match, the HTTP request method of the message shall be the same as the value of this attribute. Valid values are specified in IETF RFC 9110 [15] and IETF RFC 5789 [16]. The API producer shall support this attribute. |
| >requestUriPattern | String | 0..1 | Substring to be matched in the request URI. To match, the request URI shall include the value of this attribute as a substring. This is typically used to match messages which associate to RESTful resources, or to a specific API (e.g. by using the "apiName" of the API). The API producer shall support this attribute. |
| >dstIpAddress | IpAddress | 0..1 | IP address to match the destination IP address of response messages to log. The API producer shall support this attribute. |
| >responseCodes | String | 0..N | HTTP response codes or patterns to match. A list of all valid HTTP response codes and their specification documents can be obtained from the HTTP status code registry [i.13]. In addition, if supported, the following patterns may be used (case-insensitive): <ul style="list-style-type: none"> • "1XX": for matching any kind of informational response. • "2XX": for matching any kind of success response. • "3XX": for matching any kind of redirection response. • "4XX": for matching any kind of client error response. • "5XX": for matching any kind of server error response. The API producer shall support this attribute. |

| Attribute name | Data type | Cardinality | Description |
|--|-----------|-------------|--|
| >headerField | String | 0..1 | Name of the header field to be matched. The header field name shall be one of the supported fields in a request message as defined in clause 4.2.2 of ETSI GS NFV-SOL 013 [4] or in a response message as defined in clause 4.2.3 of ETSI GS NFV-SOL 013 [4], in accordance with the "direction" criteria input. The API producer may support this attribute. |
| >headerValue | String | 0..1 | Value in the header to be matched. To match, the value in the header field indicated by "headerField" shall be the same as in this attribute. Shall be provided if a "headerField" is provided. The API producer may support this attribute. |
| >bodyValues | String | 0..N | A list of strings to be matched in the body part of the interface message (e.g. the body of an HTTP message). If provided, only messages with text in the body part containing all the values from the list shall match the filter. In addition to a matching filter for the body of the message, a corresponding "headerField" filter shall also be provided, with "headerField" set to "Content-Type", to restrict matching to appropriate textual payloads such as "application/json" or "text/plain". The API producer may support this attribute. |
| NOTE: If a matching pattern is present, at least one of the "srcIpAddress", "dstIpAddress", "requestMethod", "requestUriPattern" or "responseCodes" shall be provided. | | | |

Examples on the usage of the LoggingJobMessagesCriteria follow:

EXAMPLE 1: A logging job messages criteria in which input and output messages are requested to be logged according to specific matching criteria: for all incoming messages with: a) a "POST" request with the "/vnflcm/v1" in the URI originated from the source IP address "10.0.0.1", and b) all outgoing messages with response codes in the ranges of "4XX" and "5XX", associated to the request URI matched pattern and source IP address "10.0.0.1", will be logged:

```
{
  "direction" : "ALL",
  "matchingPatterns" : [ {
    "srcIpAddress" : "10.0.0.1",
    "requestMethod" : "POST",
    "requestUriPattern" : "/vnflcm/v1" }, {
    "responseCodes" : [ "4XX", "5XX" ] } ]
}
```

END OF EXAMPLE 1

EXAMPLE 2: A logging job messages criteria in which all input and output messages are requested to be matched, and as a result, all messages will be logged:

```
{
  "direction" : "ALL",
}
```

END OF EXAMPLE 2

8.6.3.4 Type: LoggingJobServicesCriteria

This type represents criteria for logging jobs to collect logged messages about processes pertaining to NFV-MANO services. It shall comply with the provisions defined in table 8.6.3.4-1.

Table 8.6.3.4-1: Definition of the LoggingJobServicesCriteria data type

| Attribute name | Data type | Cardinality | Description |
|--|-----------|-------------|---|
| logGarbageCollection | Boolean | 0..1 | Indicates to collect logged information about garbage collection processes associated to NFV-MANO services. See note. |
| NOTE: In the present version of the present document, only one attribute, i.e. "logGarbageCollection", is available. | | | |

8.6.3.5 Type: LoggingJobSystemCriteria

This type represents criteria for logging jobs to collect logged system events of the NFV-MANO functional entity. It shall comply with the provisions defined in table 8.6.3.5-1.

Table 8.6.3.5-1: Definition of the LoggingJobSystemCriteria data type

| Attribute name | Data type | Cardinality | Description |
|---|---------------|-------------|--|
| systemLogs | KeyValuePairs | 1 | Values for the provider enabled system logs. See note. |
| severityLevelScheme | String | 0..1 | Identifies a severity level scheme. The default value is "rfc5424", which represents the set of values specified in the clause 6.2.1, table 2 of IETF RFC 5424 [8]. Other values may be used to signal different schemes. |
| severityLevel | Number | 1 | The severity level, which determines the severity of the system messages to collect. The NFV-MANO functional entity shall collect system log messages, as indicated by the "systemLogs" attribute, with severity levels lower (i.e. more severe) or equal to the value provided by this present attribute. |
| NOTE: The set of properties and values for this attribute are assumed to be known to the consumer by means defined outside of the present document. | | | |

8.6.3.6 Type: LoggingJobConfig

This type represents configuration data for a logging job. It shall comply with the provisions defined in table 8.6.3.6-1.

NOTE: The present document version does not specify the support for "log compilation and reporting based on events" as specified in clause 6.6.2.2 of ETSI GS NFV-IFA 031 [1].

Table 8.6.3.6-1: Definition of the LoggingJobConfig data type

| Attribute name | Data type | Cardinality | Description |
|-------------------------|---------------------|-------------|---|
| startTime | DateTime | 0..1 | Specifies the time for the logging job to be started. If not provided, the logging job is requested to start immediately. |
| endTime | DateTime | 0..1 | Specifies the time after which the logging job will stop. Shall only be provided if the logging job is requested to stop at a specific time. |
| reportingCondition | Structure (inlined) | 1 | Specifies the condition under which the producer will report to the consumer about the compiled log data. |
| >reportingType | Enum (inlined) | 1 | Specifies the type of reporting condition. Permitted values: <ul style="list-style-type: none"> REPORTING_ON_COMPILATION: the producer shall notify the consumer once the compilation of the collected logging data into a file is completed and a new log report is available. NO_REPORTING: no reporting is requested (the consumer can query the logging jobs to know about the availability of new log reports). |
| >minimumReportingPeriod | UnsignedInt | 0..1 | Specifies the minimum periodicity at which the producer will report to the consumer about the collected log information, in seconds. See note 1. |
| compileBySizeValue | UnsignedInt | 0..1 | An indicative size threshold for compiling the collected log data, in bytes. It is used when the compilation is based on the size of the collected log data. If not present, a default value as specified with the "defaultLogCompileBySizeValue" configuration in the "ManoEntityConfigurableParams" shall be used. See notes 2 and 3. |
| compileByTimerValue | UnsignedInt | 0..1 | The periodicity threshold for compiling the filtered log, in seconds. It is used when the compilation is based on a timer (e.g. every 24 hours). If not present, a default value as specified with the "defaultLogCompileByTimerValue" configuration in the "ManoEntityConfigurableParams" shall be used. See note 2. |
| securityConf | Structure (inlined) | 1 | Configuration about the security aspects of the logging job. |
| >logFileEncryption | Structure (inline) | 0..1 | Information about the encryption of the compiled log files. Shall be present if the log file is requested to be encrypted. |
| >>encryptionCertificate | String | 1 | X.509 certificate with the public key to use for the encryption of the compiled log file. |
| >>cipherAlgorithm | String | 1..N | Cryptographic algorithm to be used for the encryption of the compiled log file. More than one algorithm can be provided from higher (lower array index) to lower (higher array index) precedence. Valid values are: "AES-CBC-128", "AES-GCM-128", "AES-CBC-256", and "AES-GCM-256", as specified in clause 6.5 of ETSI GS NFV-SEC 012 [12]. |
| >>encryptAndSignOrder | String | 0..1 | Indication about the order in signing and encrypting the compiled log file. Valid values are: "encryptFirst", to apply the order "first encrypt, then sign", and "signFirst" for the order "first sign, then encrypt". Default value is "encryptFirst". |
| >logTransferSecurity | Structure (inline) | 1 | Information about the security measures for retrieving/accessing the compiled log files. |

| Attribute name | Data type | Cardinality | Description |
|--|-----------|-------------|--|
| >>publicKey | String | 0..1 | The public key of the API consumer used for the client authentication with the file server. Shall be provided if required by the type of transfer protocol. May be omitted if the key has been provided to the API producer by other means, or if it has already been provided in some previous CreateLoggingJobRequest issued by the same API consumer, whose public key has not changed. |
| NOTE 1: The minimumReportingPeriod is used to throttle possible flooding of reports by providing a lower limit on the gap between two log availability notification to be emitted by the same logging job. | | | |
| NOTE 2: More than one logCompilingCondition is possible to provide a combination of different conditions for the compilation. This covers use cases when the compilation of the log can be based on, e.g. a timer value and a size value, whichever first condition is met first. For instance, compile a log every 3 600 seconds, or whenever during the 3 600 seconds period the log grows in size to 1 000 000 bytes. | | | |
| NOTE 3: The value is indicative, as the actual size of the compiled log files might not match the provided compileBySizeValue due to possible deviations in the tracking of the size of the log data by the API producer, and the size of individual logged data entries when these are collected. | | | |

An example about the usage of the compileBySizeValue and compileByTimerValue, and their possible combination follows. Figure 8.6.3.6-1 illustrates the example.

EXAMPLE: In this example, three different log data compilation configurations are considered:

- Config #1: it requests compilation only based on size, which is indicated by the compileBySizeValue#1.
- Config #2: it requests compilation only based on a timer, which is indicated by the compileByTimerValue#1.
- Config #3: it requests compilation based both on size and timing, which is indicated by the compileByTimerValue#1 and compileBySizeValue#2.

For simple illustrative purposes, the example does assume that collection of the log data for the compilation starts at the same time, i.e. t_0 is considered the starting point. In addition, the example does not take into account the cases when a default size or time compilation value is applicable.

Under these conditions:

- Log file compilation events according to config #1 take place only when the size of the log data to compile in the file reaches value indicated by the compileBySizeValue#3, i.e. at t_3 and t_9 .
- Log file compilation events according to config #2 take place based on the value of the compileByTimerValue#1, thus at the times t_1 , t_2 , t_5 , t_8 , and t_{10} .
- Log file compilation events according to config #3 take place both when either the timing value indicated by the compileBySizeTimer#1 or the size value indicated by the compileBySizeValue#2. Therefore, in this case, the compilation takes place at times t_1 , t_2 , t_4 , t_5 , t_6 , t_7 , t_8 and t_{10} . The behaviour in between t_2 and t_8 is of particular relevance for this combined compilation case: at t_4 , the size of the log data to compile reaches the size value indicated by the compileBySizeValue#2, thus a compilation takes place; the next matching compilation condition matches when the compileByTimerValue#1 is reached, i.e. at t_5 . In a similar behaviour, next compilation events happen at t_6 , t_7 and t_8 .

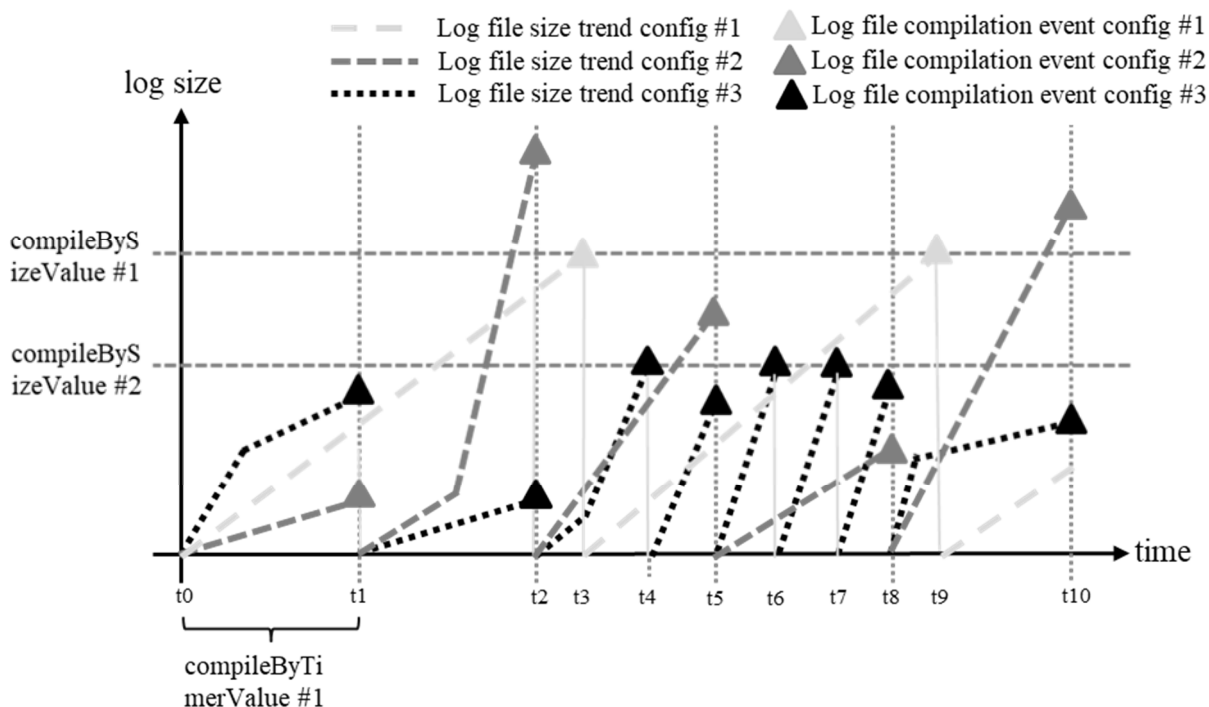


Figure 8.6.3.6-1: Example of combining different compiling conditions

END OF EXAMPLE

8.6.3.7 Type: LogmNotificationsFilter

This type represents a filter that can be used to subscribe for notifications related to log management events. It shall comply with the provisions defined in table 8.6.3.7-1.

At a particular nesting level in the filter structure, the following applies: All attributes shall match in order for the filter to match (logical "and" between different filter attributes). If an attribute is an array, the attribute shall match if at least one of the values in the array matches (logical "or" between the values of one filter attribute).

Table 8.6.3.7-1: Definition of the LogmNotificationsFilter data type

| Attribute name | Data type | Cardinality | Description |
|---|------------------------------|-------------|---|
| objectInstanceFilter | ManoEntitySubscriptionFilter | 0..1 | Filter criteria to select object instance about which to notify. |
| notificationTypes | Enum (inlined) | 0..N | Match particular notification types. Permitted values: <ul style="list-style-type: none"> LogReportAvailableNotification See note. |
| NOTE: The permitted values of the "notificationTypes" attribute are spelled exactly as the names of the notification types to facilitate automated code generation systems. | | | |

8.6.4 Referenced simple data types and enumerations

None.

Annex A (informative): Mapping operations to protocol elements

A.1 Overview

This annex provides the mapping between operations as defined in ETSI GS NFV-IFA 031 [1] and the corresponding resources and HTTP methods defined in the present document.

A.2 NFV-MANO configuration and information management interface

Table A.2-1 provides the mapping in between the operations and corresponding resources and HTTP methods for the NFV-MANO configuration and information management interface.

Table A.2-1: Mapping for the NFV-MANO configuration and information management interface

| ETSI GS NFV-IFA 031 [1] operation | HTTP method | Resource | Direction |
|-----------------------------------|-------------|--|---|
| Modify Config | PATCH | nfvmanocim/{apiMajorVersion}/mano_entity | API consumer → NFV-MANO functional entity |
| | PATCH | nfvmanocim/{apiMajorVersion}/mano_entity/mano_interfaces/{manoServiceInterfaceId} | API consumer → NFV-MANO functional entity |
| | PATCH | nfvmanocim/{apiMajorVersion}/peer_entities/{peerEntityId} | API consumer → NFV-MANO functional entity |
| Query Config Info | GET | nfvmanocim/{apiMajorVersion}/mano_entity | API consumer → NFV-MANO functional entity |
| | GET | nfvmanocim/{apiMajorVersion}/mano_entity/mano_interfaces | API consumer → NFV-MANO functional entity |
| | GET | nfvmanocim/{apiMajorVersion}/mano_entity/mano_interfaces/{manoServiceInterfaceId} | API consumer → NFV-MANO functional entity |
| | GET | nfvmanocim/{apiMajorVersion}/peer_entities | API consumer → NFV-MANO functional entity |
| | GET | nfvmanocim/{apiMajorVersion}/peer_entities/{peerEntityId} | API consumer → NFV-MANO functional entity |
| Change State | POST | nfvmanocim/{apiMajorVersion}/mano_entity/change_state | API consumer → NFV-MANO functional entity |
| | POST | nfvmanocim/{apiMajorVersion}/mano_entity/mano_interfaces/{manoServiceInterfaceId}/change_state | API consumer → NFV-MANO functional entity |
| Subscribe | POST | nfvmanocim/{apiMajorVersion}/subscriptions | API consumer → NFV-MANO functional entity |
| Terminate subscription | DELETE | nfvmanocim/{apiMajorVersion}/subscriptions/{subscriptionId} | API consumer → NFV-MANO functional entity |
| Notify | POST | (client-provided) | NFV-MANO functional entity → API consumer |

| ETSI GS NFV-IFA 031 [1] operation | HTTP method | Resource | Direction |
|-----------------------------------|-------------|---|---|
| Query Subscription Information | GET | nfvmanocim/{apiMajorVersion}/subscriptions | API consumer → NFV-MANO functional entity |
| | GET | nfvmanocim/{apiMajorVersion}/subscriptions/{subscriptionId} | API consumer → NFV-MANO functional entity |

A.3 NFV-MANO performance management interface

Table A.3-1 provides the mapping in between the operations and corresponding resources and HTTP methods for the NFV-MANO performance management interface.

Table A.3-1: Mapping for the NFV-MANO performance management interface

| ETSI GS NFV-IFA 031 [1] operation | HTTP method | Resource | Direction |
|---|-------------|--|---|
| Create PM Job | POST | nfvmanopm/{apiMajorVersion}/pm_jobs | API consumer → NFV-MANO functional entity |
| Delete PM Job | DELETE | nfvmanopm/{apiMajorVersion}/pm_jobs/{pmJobId} | API consumer → NFV-MANO functional entity |
| Query PM Job | GET | nfvmanopm/{apiMajorVersion}/pm_jobs/ | API consumer → NFV-MANO functional entity |
| | GET | nfvmanopm/{apiMajorVersion}/pm_jobs/{pmJobId} | API consumer → NFV-MANO functional entity |
| Create Threshold | POST | nfvmanopm/{apiMajorVersion}/thresholds | API consumer → NFV-MANO functional entity |
| Delete Thresholds | DELETE | nfvmanopm/{apiMajorVersion}/thresholds/{thresholdId} | API consumer → NFV-MANO functional entity |
| Query Thresholds | GET | nfvmanopm/{apiMajorVersion}/thresholds | API consumer → NFV-MANO functional entity |
| | GET | nfvmanopm/{apiMajorVersion}/thresholds/{thresholdId} | API consumer → NFV-MANO functional entity |
| Subscribe | n/a | See note. | |
| Terminate Subscription | n/a | See note. | |
| Notify | POST | (client-provided) | NFV-MANO functional entity → API consumer |
| Query Subscription Information | n/a | See note. | |
| | n/a | See note. | |
| NOTE: In the VNF Performance Management interface, support for subscriptions has been dropped in version 3.5.1 of the present document in favour of controlling the delivery of notifications directly by the "Thresholds" and "PM jobs" resources. | | | |

A.4 NFV-MANO fault management interface

Table A.4-1 provides the mapping in between the operations and corresponding resources and HTTP methods for the NFV-MANO fault management interface.

Table A.4-1: Mapping for the NFV-MANO fault management interface

| ETSI GS NFV-IFA 031 [1] operation | HTTP method | Resource | Direction |
|-----------------------------------|-------------|--|---|
| Subscribe | POST | nfvmanofm/{apiMajorVersion}/subscriptions | API consumer → NFV-MANO functional entity |
| Terminate Subscription | DELETE | nfvmanofm/{apiMajorVersion}/subscriptions/{subscriptionId} | API consumer → NFV-MANO functional entity |
| Notify | POST | (client-provided) | NFV-MANO functional entity → API consumer |
| Get Alarm List | GET | nfvmanofm/{apiMajorVersion}/alarm/ | API consumer → NFV-MANO functional entity |
| Query Subscription Information | GET | nfvmanofm/{apiMajorVersion}/subscriptions | API consumer → NFV-MANO functional entity |
| | GET | nfvmanofm/{apiMajorVersion}/subscriptions/{subscriptionId} | API consumer → NFV-MANO functional entity |
| Acknowledge alarms | PATCH | nfvmanofm/{apiMajorVersion}/alarm/{alarmId} | API consumer → NFV-MANO functional entity |

A.5 NFV-MANO log management interface

Table A.5-1 provides the mapping in between the operations and corresponding resources and HTTP methods for the NFV-MANO log management interface.

Table A.5-1: Mapping for the NFV-MANO log management interface

| ETSI GS NFV-IFA 031 [1] operation | HTTP method | Resource | Direction |
|-----------------------------------|-------------|--|---|
| Create Logging Job | POST | nfvmanologm/{apiMajorVersion}/log_jobs | NFV-MANO functional entity → API consumer |
| Stop Logging Job | DELETE | nfvmanologm/{apiMajorVersion}/log_jobs/{logJobId} | API consumer → NFV-MANO functional entity |
| Query Logging Job | GET | nfvmanologm/{apiMajorVersion}/log_jobs | API consumer → NFV-MANO functional entity |
| | GET | nfvmanologm/{apiMajorVersion}/log_jobs/{logJobId} | API consumer → NFV-MANO functional entity |
| Subscribe | POST | nfvmanologm/{apiMajorVersion}/subscriptions | API consumer → NFV-MANO functional entity |
| Terminate Subscription | DELETE | nfvmanologm/{apiMajorVersion}/subscriptions/{subscriptionId} | API consumer → NFV-MANO functional entity |
| Notify | POST | (client-provided) | NFV-MANO functional entity → API consumer |
| Query Subscription Information | GET | nfvmanologm/{apiMajorVersion}/subscriptions | API consumer → NFV-MANO functional entity |
| | GET | nfvmanologm/{apiMajorVersion}/subscriptions/{subscriptionId} | API consumer → NFV-MANO functional entity |

Annex B (normative): Authorization scope values

B.1 Overview

This annex specifies authorization scope values for selected APIs defined in the present document as defined in clause 8.3.7 of ETSI GS NFV-SOL 013 [4]. Each authorization scope value is defined recursively as the union of a set of permitted resource URIs with associated permitted methods, and a set of permitted referenced authorization scope values, where one of these sets can be empty.

B.2 NFV-MANO Configuration and Information Management interface

This clause specifies authorization scope values to consume the NFV-MANO Configuration and Information Management interface specified in clause 5. If the NFV-MANO functional entity supports authorization scope values, the NFV-MANO functional entity shall support the authorization scope values specified in table B.2-1 and may support additional authorization scope values, when authorizing an API request from an API consumer as specified in clause 8.3.3 in ETSI GS NFV-SOL 013 [4].

The elements in the authorization scope value definition specified in clause 8.3.7 of ETSI GS NFV-SOL 013 [4] are defined as follows, resulting in the authorization scope values given in table B.2-1:

- {apiName} is set as defined in clause 5.3;
- <vn> shall be set to the value of {apiMajorVersion} as defined in clause 5.2;
- <permissionName> and <qualifier> are set as defined in table B.2-1.

Table B.2-1: Authorization scope values for NFV-MANO Configuration and Information Management interface

| Authorization scope value | Description |
|--|--|
| nfvmanocim:<vn>:mano_entity_info | Allows to read the "NFV-MANO entity" resource, to create, read and modify its child resources. This permission allows to read configuration and information about an NFV-MANO functional entity as indicated in clause 5.4.1, modify configuration of an NFV-MANO functional entity as indicated in clause 5.4.2. |
| nfvmanocim:<vn>:mano_entity_info:readonly | Allows read only access to the "NFV-MANO entity" resource and its child resources, but not to modify it. |
| nfvmanocim:<vn>: change_state | Allows to access the "Change NFV-MANO entity state task" resource, the "change state operation occurrences" resource and its child resources. This permission allows to change the operational state of a managed entity as indicated in clause 5.4.5 |
| nfvmanocim:<vn>: change_state_op_occs:readonly | Allows read only access to the "change state operation occurrences" resources and its child resources. |
| nfvmanocim:<vn>:peer_entity_info | Allows to read the "peer entities" resource, to create, read, modify and delete its child resources. This permission allows to create a new resource representing the "peer functional entity", query/read configuration/information with regards to one or more peer entities, change and delete configuration/information with regards to one peer entity as indicated in clause 5.4.6. |
| nfvmanocim:<vn>:peer_entity_info:readonly | Allows read only access to the "peer entities" resource and its child resources, but not to modify and delete it. |

| Authorization scope value | Description |
|-------------------------------|--|
| nfvmanocim:<vn>:subscriptions | Allows to read the "Subscriptions" resource, and to create, read and delete its child resources. This permission allows managing subscriptions indicated in clause 5.4.3. |
| nfvmanocim:<vn>:all | Allows to perform all methods on all resources of the NFV-MANO Configuration and Information Management interface. |

Table B.2-2 defines the authorization scope values that are applicable to the NFV-MANO Configuration and Information Management interface.

Table B.2-2: Resource and permission of authorization scope for NFV-MANO Configuration and Information Management interface

| Authorization scope value | Resources and scopes | Permitted methods |
|--|---|--------------------|
| nfvmanocim:<vn>: mano_entity_info | /mano_entity | GET, PATCH |
| | /mano_entity/mano_interfaces | GET, |
| | /mano_entity/mano_interfaces/{ manoServiceInterfaceId} | GET, PATCH |
| nfvmanocim:<vn>:mano_entity_info:read only | /mano_entity | GET |
| | /mano_entity/mano_interfaces | GET |
| | /mano_entity/mano_interfaces/{ manoServiceInterfaceId} | GET |
| nfvmanocim:<vn>: change_state | /mano_entity/change_state | POST |
| | /mano_entity/mano_interfaces/{manoServiceInterfaceId}/change_state | POST |
| | /change_state_ops | GET |
| | /change_state_ops/{changeStateOpOcclId} | GET |
| | nfvmanocim:<vn>:subscriptions | - |
| nfvmanocim:<vn>: change_state_op_occs:readonly | /change_state_ops | GET |
| | /change_state_ops_occs/{changeStateOpOcclId} | GET |
| | nfvmanocim:<vn>:subscriptions (see note) | - |
| nfvmanocim:<vn>:peer_entity_info | /peer_entities | GET, POST |
| | /peer_entities/{peerEntityId} | GET, PATCH, DELETE |
| nfvmanocim:<vn>:peer_entity_info:read only | /peer_entities | GET |
| | /peer_entities/{peerEntityId} | GET |
| nfvmanocim:<vn>:subscriptions | /subscriptions | GET, POST |
| | /subscriptions/{subscriptionId} | GET, DELETE |
| nfvmanocim:<vn>:all | nfvmanocim:<vn>:mano_entity_info | - |
| | nfvmanocim:<vn>:change_state | - |
| | nfvmanocim:<vn>:peer_entity_info | - |
| | nfvmanocim:<vn>:subscriptions | - |
| NOTE: | The "readonly" authorization scope value allows to create and delete operations on "nfvmanocim:<vn>:subscriptions" as described in clause 8.3.7 of ETSI GS NFV-SOL 013 [4]. | |

B.3 NFV-MANO Performance Management interface

This clause specifies authorization scope values to consume the NFV-MANO Performance Management interface specified in clause 6. If the NFV-MANO functional entity supports authorization scope values, the NFV-MANO functional entity shall support the authorization scope values specified in table B.3-1 and may support additional authorization scope values, when authorizing an API request from an API consumer as specified in clause 8.3.3 in ETSI GS NFV-SOL 013 [4].

The elements in the authorization scope value definition specified in clause 8.3.7 of ETSI GS NFV-SOL 013 [4] are defined as follows, resulting in the authorization scope values given in table B.3-1:

- {apiName} is set as defined in clause 6.3;
- <vn> shall be set to the value of {apiMajorVersion} as defined in clause 6.2;
- <permissionName> and <qualifier> are set as defined in table B.3-1.

Table B.3-1: Authorization scope values for NFV-MANO Performance Management interface

| Authorization scope value | Description |
|--|---|
| nfvmanopm:<vn>:pm_job_info | Allows to read the "PM jobs" resource, to create, read and modify its child resources. This permission allows to create a new resource representing the performance management job as indicated in clause 6.4.1, modify the callback URI of a performance management job as indicated in clause 6.4.1a, query/read information about performance management jobs as indicated in clause 6.4.2, delete performance management jobs as indicated in clause 6.4.3, and obtain information about performance reports as indicated in clause 6.4.4. |
| nfvmanopm:<vn>:pm_job_info:readonly | Allows read only access to the "PM jobs" resource and its child resources, but not to modify it. |
| nfvmanopm:<vn>:threshold_info | Allows to read the "Thresholds" resource, to create, read, modify and delete its child resources. This permission allows to create a new resource representing the performance management threshold as indicated in clause 6.4.5, modify the callback URI of a performance management threshold as indicated in clause 6.4.5a, query/read information about performance management thresholds as indicated in clause 6.4.6, and delete performance management thresholds as indicated in clause 6.4.7. |
| nfvmanopm:<vn>:threshold_info:readonly | Allows read only access to the "Thresholds" resource and its child resources, but not to modify and delete it. |
| nfvmanopm:<vn>:all | Allows to perform all methods on all resources of the NFV-MANO Performance Management interface. |

Table B.3-2 defines the authorization scope values that are applicable to the NFV-MANO Performance Management interface.

Table B.3-2: Resource and permission of authorization scope for NFV-MANO Performance Management interface

| Authorization scope value | Resources and scopes | Permitted methods |
|--|---------------------------------------|--------------------|
| nfvmanopm:<vn>:pm_job_info | /pm_jobs | GET, POST |
| | /pm_jobs/{pmJobId} | GET, PATCH, DELETE |
| | /pm_jobs/{pmJobId}/reports/{reportId} | GET |
| nfvmanopm:<vn>:pm_job_info:readonly | /pm_jobs | GET |
| | /pm_jobs/{pmJobId} | GET |
| | /pm_jobs/{pmJobId}/reports/{reportId} | GET |
| nfvmanopm:<vn>:threshold_info | /thresholds | GET, POST |
| | /thresholds/{thresholdId} | GET, PATCH, DELETE |
| nfvmanopm:<vn>:threshold_info:readonly | /thresholds | GET |
| | /thresholds/{thresholdId} | GET |
| nfvmanopm:<vn>:all | nfvmanopm:<vn>:pm_job_info | - |
| | nfvmanopm:<vn>:threshold_info | - |

B.4 NFV-MANO Fault Management interface

This clause specifies authorization scope values to consume the NFV-MANO Fault Management interface specified in clause 7. If the NFV-MANO functional entity supports authorization scope values, the NFV-MANO functional entity shall support the authorization scope values specified in table B.4-1 and may support additional authorization scope values, when authorizing an API request from an API consumer as specified in clause 8.3.3 in ETSI GS NFV-SOL 013 [4].

The elements in the authorization scope value definition specified in clause 8.3.7 of ETSI GS NFV-SOL 013 [4] are defined as follows, resulting in the authorization scope values given in table B.4-1:

- {apiName} is set as defined in clause 7.3,
- <vn> shall be set to the value of {apiMajorVersion} as defined in clause 7.2,
- <permissionName> and <qualifier> are set as defined in table B.4-1.

Table B.4-1: Authorization scope values for NFV-MANO Fault Management interface

| Authorization scope value | Description |
|------------------------------------|--|
| nfvmanofm:<vn>:alarm_info | Allows to read the "Alarms" resource, to read and modify its child resources. This permission allows to query/read information about alarms related to the NFV-MANO functional entity as indicated in clause 7.4.1, and acknowledge an individual alarm as indicated in clause 7.4.2. |
| nfvmanofm:<vn>:alarm_info:readonly | Allows read only access to the "Alarms" resource and its child resources, but not to modify it. |
| nfvmanofm:<vn>:subscriptions | Allows to read the "Subscriptions" resource, and to create, read and delete its child resources. This permission allows managing subscriptions as indicated in clause 7.4.3. |
| nfvmanofm:<vn>:all | Allows to perform all methods on all resources of the NFV-MANO Fault Management interface. |

Table B.4-2 defines the authorization scope values that are applicable to the NFV-MANO Fault Management interface.

Table B.4-2: Resource and permission of authorization scope for NFV-MANO Fault Management interface

| Authorization scope value | Resources and scopes | Permitted methods |
|------------------------------------|---------------------------------|-------------------|
| nfvmanofm:<vn>:alarm_info | /alarms | GET |
| | /alarms/{alarmId} | GET, PATCH |
| nfvmanofm:<vn>:alarm_info:readonly | /alarms | GET |
| | /alarms/{alarmId} | GET |
| nfvmanofm:<vn>:subscriptions | /subscriptions | GET, POST |
| | /subscriptions/{subscriptionId} | GET, DELETE |
| nfvmanofm:<vn>:all | nfvmanofm:<vn>:alarm_info | - |
| | nfvmanofm:<vn>:subscriptions | - |

B.5 NFV-MANO Log Management interface

This clause specifies authorization scope values to consume the NFV-MANO Log Management interface specified in clause 8. If the NFV-MANO functional entity supports authorization scope values, the NFV-MANO functional entity shall support the authorization scope values specified in table B.5-1 and may support additional authorization scope values, when authorizing an API request from an API consumer as specified in clause 8.3.3 in ETSI GS NFV-SOL 013 [4].

The elements in the authorization scope value definition specified in clause 8.3.7 of ETSI GS NFV-SOL 013 [4] are defined as follows, resulting in the authorization scope values given in table B.5-1:

- {apiName} is set as defined in clause 8.3;
- <vn> shall be set to the value of {apiMajorVersion} as defined in clause 8.2;
- <permissionName> and <qualifier> are set as defined in table B.5-1.

Table B.5-1: Authorization scope values for NFV-MANO Log Management interface

| Authorization scope value | Description |
|-----------------------------------|---|
| nfvmanologm:<vn>:log_job | Allows to read the "Logging jobs" resource, and to create, read and delete its child resources. This permission allows to create a new resource representing the logging job as indicated in clause 8.4.1, query/read information about logging jobs as indicated in clause 8.4.2, delete a logging job as indicated in clause 8.4.3, and compile log data into a file as indicated in clause 8.4.7. |
| nfvmanologm:<vn>:log_job:readonly | Allows read only access to the "Logging jobs" resource and its child resources, but not to modify it. |
| nfvmanologm:<vn>:log_report | Allows to access the "Individual log report" resource, the "Logging jobs" resource and its child resources. This permission allows to read an individual log report as indicated in clause 8.4.4. |
| nfvmanologm:<vn>:subscriptions | Allows to read the "Subscriptions" resource, and to create, read and delete its child resources. This permission allows managing subscriptions as indicated in clause 8.4.5. |
| nfvmanologm:<vn>:all | Allows to perform all methods on all resources of the NFV-MANO Log Management interface. |

Table B.5-2 defines the authorization scope values that are applicable to the NFV-MANO Log Management interface.

Table B.5-2: Resource and permission of authorization scope for NFV-MANO Log Management interface

| Authorization scope value | Resources and scopes | Permitted methods |
|-----------------------------------|--|-------------------|
| nfvmanologm:<vn>:log_job | /log_jobs | GET, POST |
| | /log_jobs/{logJobId} | GET, DELETE |
| | /log_jobs/{logJobId}/compile_log | POST |
| nfvmanologm:<vn>:log_job:readonly | /log_jobs | GET |
| | /log_jobs/{logJobId} | GET |
| nfvmanologm:<vn>:log_report | /log_jobs/{logJobId}/log_reports/{logReportId} | GET |
| | nfvmanologm:<vn>:log_job | - |
| nfvmanologm:<vn>:subscriptions | /subscriptions | GET, POST |
| | /subscriptions/{subscriptionId} | GET, DELETE |
| nfvmanologm:<vn>:all | nfvmanologm:<vn>:log_job | - |
| | nfvmanologm:<vn>:log_report | - |
| | nfvmanologm:<vn>:subscriptions | |

Annex C (informative): Change history

| Date | Version | Information about changes |
|---------------|---------|---|
| October 2018 | V0.0.1 | Skeleton and scope based on NFVSOL(18)000570 and NFVSOL(18)000571 approved at SOL#79. |
| November 2018 | V0.1.0 | Implementation of contributions approved at SOL#83 and post EA: NFVSOL(18)000641r1, NFVSOL(18)000642r1, NFVSOL(18)000643r3, NFVSOL(18)000644r2, NFVSOL(18)000650r2, NFVSOL(18)000651r2, NFVSOL(18)000652r2, NFVSOL(18)000653r2, NFVSOL(18)000654r3. Rapporteur changes: Added reference IETF RFC 7396 as introduced by contribution NFVSOL(18)000653r2. |
| December 2018 | V0.2.0 | Implementation of contributions approved at SOL#84 and SOL#85-F2F: NFVSOL(18)000714r1, NFVSOL(18)000701, NFVSOL(18)000702r1, NFVSOL(18)000703r1, NFVSOL(18)000704r2, NFVSOL(18)000705r1, NFVSOL(18)000710, NFVSOL(18)000711r1, NFVSOL(18)000712r1, NFVSOL(18)000713r1. Rapporteur corrections: Table 6.5.7.3.2-2: change clause reference, 6.6.2.9 instead of 6.5.2.9. Clause 6.4.4: change clause reference 6.6.2.5 instead of 6.5.10. Clauses 5.4.3, 6.4.8, 7.4.3 and 9.4.5: change "to terminate is available" to "to be terminated is available". |
| January 2019 | V0.3.0 | Implementation of contributions approved at SOL#85-EA, SOL#86-EA, and SOL#87: NFVSOL(18)000721, NFVSOL(18)000716r1, NFVSOL(19)000017. Rapporteur actions: Corrected few editorials. Added reference [i.2] to NFV-IFA011. |
| February 2019 | V0.4.0 | Implementation of contributions approved at SOL#88-EA, SOL#89, SOL#91-EA, and SOL#92: NFVSOL(19)000029, NFVSOL(19)000031, NFVSOL(19)000028, NFVSOL(19)000072r2, NFVSOL(19)000100r1. Rapporteur actions: Corrected few editorials. Updated few references to "clause a.b.c.d" to the actual available clause number. Aligned the spec draft to latest EditHelp! template (February 2019): updates in the "Important Notice" and addition of the clause 3.2 Symbols. Deleted editor's notes in few places as content is now available: table 5.5.4.3.2-2, table 5.5.4.3.1-2, table 5.5.3.3.2-2, table 5.5.3.3.4-2, and table 9.5.5.3.1-2. |
| April 2019 | V0.5.0 | Implementation of contributions approved at SOL#93-EA, SOL#94-EA and SOL#95: NFVSOL(19)000148, NFVSOL(19)000180, NFVSOL(19)000181r3, NFVSOL(19)000184r2, NFVSOL(19)000153r3, NFVSOL(19)000179r1, NFVSOL(19)000099r3. Rapporteur actions: Updated the clause number in clause 4 due to the insertion of clause 4.2. Added missing references for ETSI GS NFV-MAN 001 and Recommendation ITU-T X.731 in clause 2.2. Updated the references numbering. Updated clause numbering in clauses 5.6.2.x and references to these clauses due to the insertion of ManoConfigModifications as clause 5.6.2.4. Updated clause numbering in clauses 5.6.3.x and references to these clauses due to the move of the ManoEntityInterface to clause 5.6.2.11. |
| May 2019 | V0.6.0 | Implementation of contributions approved at SOL#101-F2F Sophia Antipolis: NFVSOL(19)000281r1, NFVSOL(19)000282r2, NFVSOL(19)000283, NFVSOL(19)000284, NFVSOL(19)000285r1, NFVSOL(19)000286r1, NFVSOL(19)000151r2, NFVSOL(19)000287r1. Rapporteur actions: Updated several clauses numbering, and their references. |
| June 2019 | V0.7.0 | Implementation of contributions approved at SOL#102-F2F Sophia Antipolis: NFVSOL(19)000349r2, NFVSOL(19)000351r1, NFVSOL(19)000352r1, NFVSOL(19)000375, NFVSOL(19)000350r3, NFVSOL(19)000356r3. Rapporteur actions: Updated several clauses numbering, and their references. New references added for IETF RFC 5246, IETF RFC 6749 and ETSI GS NFV-SEC 022 as indicated by contribution NFVSOL(19)000356r3. Deletion of editor's note in clause 9.6.2.5 about LoggingJobConfig, which is contributed as per implemented contribution NFVSOL(19)000351r1. |

| Date | Version | Information about changes |
|--------------------|---------|--|
| August 2019 | V0.8.0 | <p>Implementation of contributions approved at SOL#107: NFVSOL(19)000505, NFVSOL(19)000455r1. NFVSOL(19)000456r1, NFVSOL(19)000499.</p> <p>Implementation of contributions approved in SOL009-EA1: NFVSOL(19)000429, NFVSOL(19)000445, NFVSOL(19)000444, NFVSOL(19)000447, NFVSOL(19)000476, NFVSOL(19)000474r1, NFVSOL(19)000399r2, NFVSOL(19)000433r1, NFVSOL(19)000435r1, NFVSOL(19)000437r1, NFVSOL(19)000439r2, NFVSOL(19)000441r3, NFVSOL(19)000443r1, NFVSOL(19)000446r1, NFVSOL(19)000450r1, NFVSOL(19)000469r2, NFVSOL(19)000471.</p> <p>Implementation of contributions approved in SOL009-EA2: NFVSOL(19)000436r3, NFVSOL(19)000440r2, NFVSOL(19)000452r2, NFVSOL(19)000500r2, NFVSOL(19)000489r3, NFVSOL(19)000438r5.</p> <p>Implementation of contributions approved in SOL#108: NFVSOL(19)000401r2, NFVSOL(19)000400r4, NFVSOL(19)000432r5, NFVSOL(19)000442r2, NFVSOL(19)000502r1, NFVSOL(19)000521.</p> <p>Rapporteur actions: Updated several clauses numbering, and their references. Emptied clause 8 of state management after merging the clause 8.7 content into clause 5.7.</p> <p>Applied SOL015 API documentation convention such as: 1) using the "apiMajorVersion" in the resource definitions and tree representations, 2) updating the resource tree figures to indicate the task resources, 3) the steps in the flows to differentiate in between messages, notifications and internal entity steps.</p> <p>Multiple changes of "wrt" to "with regards to".</p> <p>Typos and small editorials.</p> <p>Added clause 8.6.4 "Referenced simple data types and enumerations" in the log management API, to keep consistency with other API clauses structure.</p> <p>Delete empty Annexes B and Y.</p> <p>Clause 5.6.2.2: deletion of the editor's note about the "usage stage" as per approval of the contribution NFVSOL(19)000441r3.</p> <p>Added new references as required by the approved contributions, including: IETF RFC 8447, IETF RFC 2228, IETF RFC 4217, IETF RFC 7231, HTTP status codes registry by IANA, IETF RFC 5424, IFA005/006/007/008/013, SOL005 and SEC012. The references of SOL002/003 were moved from the informative to the normative clause as per normative usage of them.</p> <p>Correction when applying the NFVSOL(19)000450r1: clause 5.5.3.3.4, the description needs to refer to the "NFV-MANO entity" resource.</p> |
| September 27, 2019 | V0.8.0a | <p>Implementation of CR in NFV(19)000224 approved at NFV#27: Internal version produced by ETSI Secretariat after NFV Approval. This version implements the CR in NFV(19)000224 which was approved during the NFV#27 Closing Plenary together with v0.8.0.</p> |
| July 2020 | V3.3.2 | <p>Implementation of CRs approved at EA#129, SOL#135 and EA#135_round2: BWC: NFVSOL(19)000682: SOL009ed341 mirror of 679 adding error response for failed notification endpoint test NBWC: NFVSOL(19)000686r1: SOL009ed341 fixing the PM interface wrt subscriptions BWC: NFVSOL(20)000373: SOL009ed341 mirror of 349 adding PM job id to notification NBWC: NFVSOL(20)000324r1: SOL009ed341 mirror of 208r1 introducing maps</p> |
| February 2021 | V3.3.3 | <p>Implementation of CRs approved at SOL#151: BWC: NFVSOL(20)000681: SOL009ed341 Resolve miscellaneous inconsistencies BWC: NFVSOL(20)000682: SOL009ed341 Fixing notifications optionality in flows</p> |
| March 2021 | V3.3.4 | <p>Implementation of CRs approved at SOL#165: BWC: NFVSOL(21)000153: SOL009ed351 Release alignment with FEAT10 multi-site connectivity BWC: NFVSOL(21)000154: SOL009ed351 Release alignments about specified interfaces</p> |
| April 2021 | V3.3.5 | <p>Implementation of CRs approved at EA#168: BWC: NFVSOL(21)000235: SOL009ed351 Updating API versions</p> |
| October 2021 | V4.0.1 | <p>Implementation of CRs approved at SOL#183: BWC: NFVSOL(21)000512: SOL009ed431 Rel. 4 mirror of 494</p> |
| January 2022 | V4.0.2 | <p>Re-base the draft with published v3.5.1. Implementation of CRs approved during EA#189: BWC: NFVSOL(21)000605: SOL009ed431 Rel. 4 mirror of 584 Minor improvements Implementation of CRs approved during SOL#192: BWC: NFVSOL(21)000656: SOL009ed431 Rel. 4 Mirror of 640r1 Resolution of VimSpecificInfo related editor's note</p> |
| February 2022 | V4.0.3 | <p>Implementation of CRs approved during SOL#195: BWC: NFVSOL(22)000038r1 SOL009ed431 Replacing MAN001 for NFV006 references BWC: NFVSOL(22)000041 SOL009ed431 PeerEntityType fix</p> |

| Date | Version | Information about changes |
|---------------|---------|---|
| April 2022 | V4.0.4 | Implementation of CRs approved during SOL#201: BWC: NFVSOL(22)000123 SOL009ed431 Adding CISM into NFV-MANO mgmt. interfaces |
| May/June 2022 | V4.0.5 | Implementation of CRs approved during SOL#204: BWC: NFVSOL(22)000201 SOL009ed431 Resolution of CismSpecificInfo related editor's note Implementation of CRs approved during SOL#205: BWC: NFVSOL(22)000202 SOL009ed431 Updating API versions Implementation of CRs approved during SOL#208: BWC: NFVSOL(22)000292r1 SOL009ed431 API version jump |
| October 2022 | V4.3.2 | Implementation of CRs approved during SOL#220: BWC: NFVSOL(22)000409 SOL009ed441 Adding CIR into NFV-MANO mgmt. interfaces BWC: NFVSOL(22)000410 SOL009ed441 Mirror of 373r2 Handling of obsolescence of IETF RFCs |
| November 2022 | V4.3.3 | Implementation of CRs approved during SOL#229: BWC: NFVSOL(22)000490 SOL009ed441 VimConnectionInfo alignments |
| January 2023 | V4.3.4 | Implementation of CRs approved during SOL#231: BWC: NFVSOL(22)000522 SOL009ed441 Resolution of CirSpecificInfo related editor's note Implementation of CRs approved during SOL#232: BWC: NFVSOL(23)000006 SOL009ed441 Update IETF references and Bugfixes Implementation of CRs approved during SOL#233: BWC: NFVSOL(23)000009r1 SOL009ed441 Adding CCM into NFV-MANO mgmt. interfaces |
| February 2023 | V4.3.5 | Implementation of CRs approved during SOL#234: BWC: NFVSOL(23)000032 SOL009ed441 Editor's note in clause 5.6.3.16 BWC: NFVSOL(23)000033: SOL009ed441 Updating API versions |
| April 2023 | V4.4.2 | Implementation of CRs approved during SOL#239: BWC: NFVSOL(23)000078 SOL009ed451 Mirror of (22)066r5 HTTP header fields update in GET-PATCH request/response BWC: NFVSOL(23)000093 SOL009ed451 OAuth scope values for NFV-MANO Configuration and Information Management BWC: NFVSOL(23)000094 SOL009ed451 OAuth scope values for NFV-MANO Performance Management Implementation of CRs approved during SOL#240: BWC: NFVSOL(23)000095r1 SOL009ed451 OAuth scope values for NFV-MANO Fault Management BWC: NFVSOL(23)000096 SOL009ed451 OAuth scope values for NFV-MANO Log Management |
| August 2023 | V4.4.3 | Implementation of CRs approved during SOL#249: BWC: NFVSOL(23)000175r2 SOL009ed451 Adding MDAF into NFV-MANO mgmt interfaces Implementation of CRs approved during SOL#257: BWC: NFVSOL(23)000254 SOL009ed451 ENH01.01 Adding certificate mgmt mode |
| October 2023 | V4.4.4 | Implementation of CRs approved during SOL#263: BWC: NFVSOL(23)000340 SOL009ed451 Updating API versions |
| April 2024 | V5.0.2 | Implementation of CRs approved during SOL#282: BWC: NFVSOL(24)000124 FEAT35 SOL009ed511 external access for PM and FM BWC: NFVSOL(24)000125: SOL009ed511 Updating NFV references |
| May 2024 | V5.0.3 | Implementation of CRs approved during SOL#284: BWC: NFVSOL(24)000131: SOL009ed511 Updating API versions |

History

| Document history | | |
|-------------------------|-----------|-------------|
| V5.1.1 | July 2024 | Publication |
| | | |
| | | |
| | | |
| | | |