



**5G;
Enabling MSGin5G Service;
Application Programming Interfaces (API)
specification;
Stage 3
(3GPP TS 29.538 version 19.4.0 Release 19)**



ReferenceRTS/TSGC-0329538vj40

Keywords5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#) repository.

Users should be aware that the present document may be revised or have its status changed,
this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to
the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our
[Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2026.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	9
1 Scope	11
2 References	11
3 Definitions of terms, symbols and abbreviations	12
3.1 Terms.....	12
3.2 Symbols.....	12
3.3 Abbreviations	12
4 Overview	13
5 Services offered by the MSGin5G Servers	13
5.1 Introduction	13
5.2 MSGS_ASRegistration Service.....	14
5.2.1 Service Description.....	14
5.2.2 Service Operations	14
5.2.2.1 Introduction.....	14
5.2.2.2 MSGS_ASRegistration_Request	14
5.2.2.2.1 General	14
5.2.2.2.2 Application Server registering to MSGin5G Server using MSGS_ASRegistration_Request operation.....	14
5.2.2.3 MSGS_ASRegistration_Deregister.....	15
5.2.2.3.1 General	15
5.2.2.3.2 Application Server deregistering from MSGin5G Server using MSGS_ASRegistration_Deregister operation	16
5.3 MSGS_MSGDelivery Service.....	16
5.3.1 Service Description.....	16
5.3.2 Service Operations	17
5.3.2.1 Introduction.....	17
5.3.2.2 MSGS_MSGDelivery_ASODelivery	17
5.3.2.2.1 General	17
5.3.2.2.2 AS Originating MSGin5G Message Delivery	17
5.3.2.3 MSGS_MSGDelivery_ASODeliveryReport.....	18
5.3.2.3.1 General	18
5.3.2.3.2 AS Originating Message Delivery Status Report	19
5.3.2.4 MSGS_MSGDelivery_UEODelivery	19
5.3.2.4.1 General	19
5.3.2.4.2 UE Originating Message Delivery.....	20
5.3.2.5 MSGS_MSGDelivery_UEODeliveryReport	21
5.3.2.5.1 General	21
5.3.2.5.2 UE Originating Message Delivery Status Report.....	21
5.4 MSGS_TopiclistEvent Service.....	22
5.4.1 Service Description.....	22
5.4.2 Service Operations	22
5.4.2.1 Introduction.....	22
5.4.2.2 MSGS_TopiclistEvent_SubscribeMSGTopiclist	22
5.4.2.2.1 General	22
5.4.2.2.2 MSGin5G Server subscribing to MSGin5G Messaging Topic List	23
5.4.2.3 MSGS_TopiclistEvent_UnsubscribeMSGTopiclist.....	23
5.4.2.3.1 General	23
5.4.2.3.2 MSGin5G Server Unsubscribing to MSGin5G Messaging Topic List.....	23
5.4.2.4 MSGS_TopiclistEvent_NotifyMSGTopiclist	24
5.4.2.4.1 General	24

5.4.2.4.2	Notification about MSGin5G Messaging Topic List.....	24
5.4.2.5	MSGs_TopiclistEvent_SubscribeMSGTopic.....	25
5.4.2.5.1	General	25
5.4.2.5.2	MSGin5G Server Subscribing to MSGin5G Messaging Topic	25
5.4.2.6	MSGs_TopiclistEvent_UnsubscribeMSGTopic.....	25
5.4.2.6.1	General	25
5.4.2.6.2	MSGin5G Server Unsubscribing to MSGin5G Messaging Topic.....	26
6	Services offered by the Message Gateway	26
6.1	Introduction	26
6.2	MSGG_L3GDelivery Service	27
6.2.1	Service Description.....	27
6.2.2	Service Operations	27
6.2.2.1	Introduction.....	27
6.2.2.2	MSGG_L3GDelivery_GTDelivery.....	27
6.2.2.2.1	General	27
6.2.2.2.2	Legacy 3GPP Message Gateway Terminating Message Delivery.....	28
6.2.2.3	MSGG_L3GDelivery_GTDeliveryReport.....	28
6.2.2.3.1	General	28
6.2.2.3.2	Legacy 3GPP Message Gateway Terminating Message Delivery Status Report	29
6.3	MSGG_N3GDelivery Service.....	29
6.3.1	Service Description.....	29
6.3.2	Service Operations	29
6.3.2.1	Introduction.....	29
6.3.2.2	MSGG_N3GDelivery_GTDelivery	30
6.3.2.2.1	General	30
6.3.2.2.2	Non-3GPP Message Gateway Terminating Message Delivery	30
6.3.2.3	MSGG_N3GDelivery_GTDeliveryReport	31
6.3.2.3.1	General	31
6.3.2.3.2	Non-3GPP Message Gateway Terminating Message Delivery Status Report.....	31
6.4	MSGG_BGDelivery Service	32
6.4.1	Service Description.....	32
6.4.2	Service Operations	32
6.4.2.1	Introduction.....	32
6.4.2.2	MSGG_BGDelivery_GTDelivery	32
6.4.2.2.1	General	32
6.4.2.2.2	Broadcast Message Gateway Terminating Message Delivery.....	32
7	Common information applicable to several APIs	33
7.1	General	33
7.2	Data Types.....	33
7.2.1	General.....	33
7.2.2	Referenced structured data types	34
7.2.3	Referenced Simple data types and enumerations.....	34
7.3	Usage of HTTP.....	34
7.4	Content type	34
7.5	URI structure	34
7.5.1	Resource URI structure.....	34
7.5.2	Custom operations URI structure.....	35
7.6	Notifications	35
7.7	Error Handling.....	35
7.8	Feature negotiation	35
7.9	HTTP headers.....	35
7.10	Conventions for Open API specification files	35
8	Message Server API definition.....	35
8.1	MSGs_ASRegistration API.....	35
8.1.1	API URI.....	35
8.1.2	Resources.....	36
8.1.2.1	Overview.....	36
8.1.2.2	Resource: AS Registrations.....	36
8.1.2.2.1	Description	36
8.1.2.2.2	Resource Definition.....	36

8.1.2.2.3	Resource Standard Methods	37
8.1.2.3	Resource: AS DeRegistration.....	37
8.1.2.3.1	Description	37
8.1.2.3.2	Resource Definition.....	38
8.1.2.3.3	Resource Standard Methods	38
8.1.3	Custom Operations without associated resources	39
8.1.4	Notifications	39
8.1.5	Data Model	39
8.1.5.1	General	39
8.1.5.2	Structured data types	40
8.1.5.2.1	Introduction	40
8.1.5.2.2	Type: ASRegistration	40
8.1.5.2.3	Type: ASRegistrationAck.....	40
8.1.5.2.4	Type: ASProfile.....	41
8.1.5.3	Simple data types and enumerations	41
8.1.6	Error Handling	41
8.1.6.1	General	41
8.1.6.2	Protocol Errors	41
8.1.6.3	Application Errors.....	41
8.1.7	Feature negotiation	41
8.2	MSG5_MSGDelivery API	41
8.2.1	API URI	41
8.2.2	Resources	42
8.2.3	Custom Operations without associated resources	42
8.2.3.1	Overview	42
8.2.3.2	Operation: deliver-as-message	43
8.2.3.2.1	Description	43
8.2.3.2.2	Operation Definition.....	43
8.2.3.3	Operation: deliver-ue-message.....	44
8.2.3.3.1	Description	44
8.2.3.3.2	Operation Definition.....	44
8.2.3.4	Operation: deliver-report.....	45
8.2.3.4.1	Description	45
8.2.3.4.2	Operation Definition.....	45
8.2.4	Notifications	46
8.2.5	Data Model	46
8.2.5.1	General	46
8.2.5.2	Structured data types	47
8.2.5.2.1	Introduction	47
8.2.5.2.2	Type: ASMessageDelivery	47
8.2.5.2.3	Type: UEMessageDelivery.....	48
8.2.5.2.4	Type: MessageDeliveryAck	48
8.2.5.2.5	Type: MessageSegmentParameters	49
8.2.5.2.6	Type: StoreAndForwardParameters	49
8.2.5.2.7	Type: DeliveryStatusReport	49
8.2.5.3	Simple data types and enumerations	49
8.2.5.3.1	Introduction	49
8.2.5.3.2	Simple data types.....	50
8.2.5.3.3	Enumeration: DeliveryStatus.....	50
8.2.5.3.4	Enumeration: ReportDeliveryStatus.....	50
8.2.5.3.5	Enumeration: Priority	50
8.2.6	Error Handling	50
8.2.6.1	General	50
8.2.6.2	Protocol Errors	50
8.2.6.3	Application Errors.....	50
8.2.7	Feature negotiation	51
8.3	MSG5_TopiclistEvent API	51
8.3.1	API URI	51
8.3.2	Resources	51
8.3.2.1	Overview	51
8.3.2.2	Resource: Topic List Subscriptions.....	52
8.3.2.2.1	Description	52

8.3.2.2.2	Resource Definition.....	52
8.3.2.2.3	Resource Standard Methods	52
8.3.2.3	Resource: Individual Topic List Subscription.....	53
8.3.2.3.1	Description	53
8.3.2.3.2	Resource Definition.....	53
8.3.2.3.3	Resource Standard Methods	53
8.3.3	Custom Operations without associated resources	54
8.3.3.1	Overview	54
8.3.3.2	Operation: request-topic-subscription	55
8.3.3.2.1	Description	55
8.3.3.2.2	Operation Definition.....	55
8.3.3.3	Operation: request-topic-unsubscription	56
8.3.3.3.1	Description	56
8.3.3.3.2	Operation Definition.....	56
8.3.4	Notifications	57
8.3.4.2	Topiclist Notification	58
8.3.4.2.1	Description	58
8.3.4.2.2	Target URI.....	58
8.3.4.2.3	Standard Methods.....	58
8.3.5	Data Model	59
8.3.5.1	General	59
8.3.5.2	Structured data types	60
8.3.5.2.1	Introduction	60
8.3.5.2.2	Type: TopicListSubscription	60
8.3.5.2.3	Void.....	60
8.3.5.2.4	Void.....	60
8.3.5.2.5	Type: TopicListUnsubscriptionAck	60
8.3.5.2.6	Type: TopicSubscription	60
8.3.5.2.7	Type: TopicSubscriptionAck.....	61
8.3.5.2.8	Type: TopicUnsubscription	61
8.3.5.2.9	Type: TopicListNotification	61
8.3.5.2.10	Type: MessagingTopic	61
8.3.5.3	Simple data types and enumerations	61
8.3.5.3.1	Introduction	61
8.3.5.3.2	Enumeration: UpdateStatus	62
8.3.6	Error Handling.....	62
8.3.6.1	General	62
8.3.6.2	Protocol Errors	62
8.3.6.3	Application Errors.....	62
8.3.7	Feature negotiation	62
9	Message Gateway API definition.....	62
9.1	MSGG_L3GDelivery API.....	62
9.1.1	API URI.....	62
9.1.2	Resources.....	63
9.1.3	Custom Operations without associated resources	63
9.1.3.1	Overview	63
9.1.3.2	Operation: deliver-message.....	63
9.1.3.2.1	Description	63
9.1.3.2.2	Operation Definition.....	63
9.1.3.3	Operation: deliver-report.....	64
9.1.3.3.1	Description	64
9.1.3.3.2	Operation Definition.....	64
9.1.4	Notifications	65
9.1.5	Data Model	65
9.1.5.1	General	65
9.1.5.2	Structured data types	67
9.1.5.2.1	Introduction	67
9.1.5.2.2	Type: L3gMessageDelivery	67
9.1.5.2.3	Type: Address.....	67
9.1.5.3	Simple data types and enumerations	68
9.1.5.3.1	Introduction	68

9.1.5.3.2	Enumeration: AddressType	68
9.1.6	Error Handling	68
9.1.6.1	General	68
9.1.6.2	Protocol Errors	68
9.1.6.3	Application Errors	68
9.1.7	Feature negotiation	68
9.2	MSGG_N3GDDelivery API	69
9.2.1	API URI	69
9.2.2	Resources	69
9.2.3	Custom Operations without associated resources	69
9.2.3.1	Overview	69
9.2.3.2	Operation: deliver-message	70
9.2.3.2.1	Description	70
9.2.3.2.2	Operation Definition	70
9.2.3.3	Operation: deliver-report	71
9.2.3.3.1	Description	71
9.2.3.3.2	Operation Definition	71
9.2.4	Notifications	71
9.2.5	Data Model	72
9.2.5.1	General	72
9.2.5.2	Structured data types	73
9.2.5.2.1	Introduction	73
9.2.5.2.2	Type: N3gMessageDelivery	73
9.2.6	Error Handling	73
9.2.6.1	General	73
9.2.6.2	Protocol Errors	73
9.2.6.3	Application Errors	74
9.2.7	Feature negotiation	74
9.3	MSGG_BGDDelivery API	74
9.3.1	API URI	74
9.3.2	Resources	74
9.3.3	Custom Operations without associated resources	74
9.3.3.1	Overview	74
9.3.3.2	Operation: deliver-message	75
9.3.3.2.1	Description	75
9.3.3.2.2	Operation Definition	75
9.3.4	Notifications	76
9.3.5	Data Model	76
9.3.5.1	General	76
9.3.5.2	Structured data types	77
9.3.5.2.1	Introduction	77
9.3.5.2.2	Type: BgMessageDelivery	77
9.3.5.3	Simple data types and enumerations	77
9.3.6	Error Handling	77
9.3.6.1	General	77
9.3.6.2	Protocol Errors	78
9.3.6.3	Application Errors	78
9.3.7	Feature negotiation	78
10	Security	78
11	Using Common API Framework	78
11.1	General	78
11.2	Security	79
12	Usage of Network Capabilities	79
Annex A (normative):	OpenAPI specification	81
A.1	General	81
A.2	MSGG_ASRegistration API	81
A.3	MSGG_MSGDelivery API	83

A.4 MSGG_L3GDelivery API.....88

A.5 MSGG_N3GDelivery API 91

Annex B (informative): Change history 100

History 103

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

- shall** indicates a mandatory requirement to do something
- shall not** indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

- should** indicates a recommendation to do something
- should not** indicates a recommendation not to do something
- may** indicates permission to do something
- need not** indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

- can** indicates that something is possible
- cannot** indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

- will** indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- will not** indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document
- might** indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

1 Scope

The present document specifies the Application Programming Interface (API) for enabling the MSGin5G Service over MSGin5G-2/3/4/7/8 interfaces. The application layer architecture, functional requirements, procedures and information flows necessary for MSGin5G Service are contained in 3GPP TS 23.554 [2]. The requirements for MSGin5G are specified in 3GPP TS 22.262 [3].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.554: "Application architecture for MSGin5G Service".
- [3] 3GPP TS 22.262: "Message Service within the 5G System".
- [4] Void.
- [5] 3GPP TS 29.571: "5G System; Common Data Types for Service Based Interfaces Stage 3".
- [6] OpenAPI: "OpenAPI Specification Version 3.0.0", <https://spec.openapis.org/oas/v3.0.0>.
- [7] 3GPP TS 23.222: "Functional architecture and information flows to support Common API Framework for 3GPP Northbound APIs; Stage 2".
- [8] 3GPP TS 29.222: "Common API Framework for 3GPP Northbound APIs; Stage 3".
- [9] 3GPP TS 29.501: "5G System; Principles and Guidelines for Services Definition; Stage 3".
- [10] IETF RFC 9112: "HTTP/1.1".
- [11] IETF RFC 9110: "HTTP Semantics"
- [12] Void.
- [13] Void.
- [14] IETF RFC 9111: "Caching".
- [15] Void
- [16] IETF RFC 9113: "HTTP/2".
- [17] IETF RFC 8259: "The JavaScript Object Notation (JSON) Data Interchange Format".
- [18] 3GPP TR 21.900: "Technical Specification Group working methods".
- [19] 3GPP TR 33.862: "Study on security aspects of the Message Service for MIIoT over the 5G System (MSGin5G)".
- [20] 3GPP TS 33.501: "Security architecture and procedures for 5G system".
- [21] IETF RFC 6749: "The OAuth 2.0 Authorization Framework".

- [22] 3GPP TS 33.122: "Security Aspects of Common API Framework for 3GPP Northbound APIs".
- [23] 3GPP TS 29.522: "5G System; Network Exposure Function Northbound APIs; Stage 3".
- [24] 3GPP TS 29.122: "T8 reference point for northbound APIs".

3 Definitions of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

For the purposes of the present document, the following terms and its definitions given in 3GPP TS 23.554 [2] shall apply:

MSGin5G Service
MSGin5G message
MSGin5G UE
MSGin5G Group
MSGin5G Client
MSGin5G Server
Legacy 3GPP Message Gateway
Non-3GPP Message Gateway
Broadcast Message Gateway
Legacy 3GPP UE
Non-3GPP UE
Point-to-Point messaging
Point-to-Application messaging
Application-to-Point messaging
Group messaging
Broadcast messaging
Messaging Topic
Message Gateway
Broadcast Area

3.2 Symbols

For the purposes of the present document, the following symbols apply:

<symbol> <Explanation>

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

AS	Application Server
BC	Broadcast
BMG	Broadcast Message Gateway
CAPIF	Common API Framework
L3G	Legacy 3GPP Message Gateway
N3G	Non-3GPP Message Gateway

4 Overview

The MSGin5G Service is designed and optimized for massive IoT device communication including thing-to-thing communication and person-to-thing communication and provides messaging capability in 5GS with messaging communication models including Point-to-Point, Application-to-Point/Point-to-Application, Group and Broadcast messaging.

3GPP TS 23.554 [2] has specified the application layer architecture, architectural requirements, procedures, information flows and some APIs, in order to support the MSGin5G Service. Various features are defined to ensure the efficient use and deployment of MSGin5G Service, including configuration, registration, message delivery, message aggregation, segmentation and reassembly, topic messaging.

The present document specifies MSGin5G Services offered by MSGin5G Servers and MSGin5G Gateway, and APIs in detail, needed over MSGin5G-2/3/4/7/8 interfaces for interworking between MSGin5G Server and Legacy 3GPP UE, Non-3GPP UE, Broadcast Message Gateway or Application Server, with following functionalities need to be supported:

1. Server-side functionality with the sending and receiving of messages to/from Application Servers and/or other MSGin5G Service endpoints on other UEs, provided by MSGin5G Server.
2. Interconnecting two different messaging delivery mechanisms and assure the message integrity between different message delivery mechanisms, provided by Message Gateway.

And the definition of APIs specified in TS 23.554 [2] clause 9 is introduced in present document.

5 Services offered by the MSGin5G Servers

5.1 Introduction

The Table 5.1-1 lists the services provided by the MSGin5G Server and corresponding service operations. A service description clause for each API gives a general description of the related API.

Table 5.1-1 List of services provided by the MSGin5G Servers

Service Name	Service Operations	Operation Semantics	Example Consumer(s)
MSGs_ASRegistration	MSGs_ASRegistration_Request	Request/Response	AS
	MSGs_ASRegistration_Deregister		
MSGs_MSGDelivery	MSGs_MSGDelivery_ASODelivery	Request/ Response	AS, Legacy 3GPP Message Gateway, Non-3GPP Message Gateway
	MSGs_MSGDelivery_ASODeliveryReport		
	MSGs_MSGDelivery_UEODelivery		
	MSGs_MSGDelivery_UEODeliveryReport		
MSGs_TopiclistEvent	MSGs_TopiclistEvent_SubscribeMSGTopiclist	Subscribe/Notify	MSGin5G Server
	MSGs_TopiclistEvent_UnsubscribeMSGTopiclist		
	MSGs_TopiclistEvent_NotifyMSGTopiclist		
	MSGs_TopiclistEvent_SubscribeMSGTopic	Request/ Response	MSGin5G Server
	MSGs_TopiclistEvent_UnsubscribeMSGTopic		

Table 5.1-2 summarizes the corresponding APIs defined in this specification.

Table 5.1-2: API Descriptions

Service Name	Clause	Description	OpenAPI Specification File	apiName	Annex
MSGs_ASRegistration	8.1	AS Registration Service	TS29538_MSGS_ASRegistration.yaml	Msgs-asregistr ation	A.2
MSGs_MSGDelivery	8.2	Message Delivery Service	TS29538_MSGS_MSGDelivery.yaml	Msgs- msgdeliv ery	A.3
MSGs_TopiclistEvent	8.3	Topic Messaging Service	TS29538_MSGS_TopiclistEvent.yam l	Msgs- topicliste vent	A.7

5.2 MSGS_ASRegistration Service

5.2.1 Service Description

The MSGS_ASRegistration API, as defined in 3GPP TS 23.554 [2], allows an AS via Mm5s interface to register, and deregister at a given MSGin5G Server.

5.2.2 Service Operations

5.2.2.1 Introduction

The service operation defined for MSGS_ASRegistration API is shown in the Table 5.2.2.1-1.

Table 5.2.2.1-1: Operations of the MSGS_ASRegistration API

Service operation name	Description	Initiated by
MSGs_ASRegistration_Request	This service operation is used by the AS to register itself to MSGin5G Server.	AS
MSGs_ASRegistration_Deregister	This service operation is used by the AS to deregister itself from a MSGin5G Server.	AS

5.2.2.2 MSGS_ASRegistration_Request

5.2.2.2.1 General

This service operation is used by the AS to register itself to MSGin5G Server.

5.2.2.2.2 Application Server registering to MSGin5G Server using MSGS_ASRegistration_Request operation

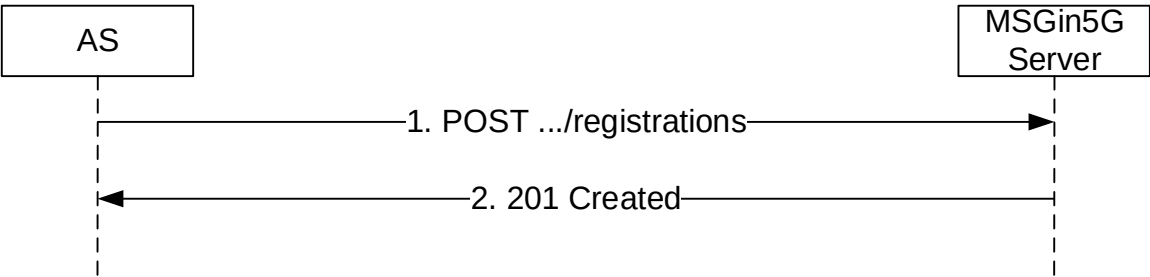


Figure 5.2.2.2.2-1: AS Registering to MSGin5G Server

To register itself at the MSGin5G Server, the AS shall send an HTTP POST message to the MSGin5G Server on the "AS Registrations" collection resource. The body of the HTTP POST message shall include ASRegistration data structure that shall include:

- the Application Server Identifier within the "asSvcId" attribute; and
- may include:
- the Application Identifier within the "appId" attribute;
 - the notification target URI within the "targetUri" attribute;
 - the Requested expiration time within the "reqExprTime" attribute;
 - the Expected MSGin5G group list within the "exGroupList" attribute; and
 - the Application Server Profile Information within the "asProf" attribute, that may include:
 - the Application Server name within the "appName" attribute;
 - the list of Application Providers name within the "appProviders" attribute;
 - the list of Application scenarios within the "appScenarios" attribute;
 - the list of Application Server category within the "appCategory" attribute; and
 - the list of Application Server status within the "asStatus" attribute.

Upon receiving the HTTP POST message from the AS, the MSGin5G Server shall:

1. process the AS registration request information;
2. verify the identity of the AS and check if the AS is authorized to register itself at MSGin5G Server; and
3. if the AS is authorized to register to MSGin5G Server, then the MSGin5G Server shall:
 - a. store the AS registration information and create a new resource with the AS registration information as specified in clause 8.1.2.1; and
 - b. If the registration is successful, the MSGin5G Server shall respond to the AS with an HTTP "201 Created" status code, including an HTTP Location header field containing the URI of the created "AS Registration" resource and the response body containing ASRegistrationAck data structure that shall contain:
 - the Application Server Identifier within the "asSvcId" attribute; and
 - the registration result within the "result" attribute.

may include:

- the Registration expiration time within the "regExprTime" attribute;

If errors occur when processing the HTTP POST request, the MSGin5G Server shall apply error handling procedures as specified in clause 8.1.6.

5.2.2.3 MSGS_ASRegistration_Deregister

5.2.2.3.1 General

This service operation is used by the AS to deregister itself from a MSGin5G Server.

5.2.2.3.2 Application Server deregistering from MSGin5G Server using MSGS_ASRegistration_Deregister operation

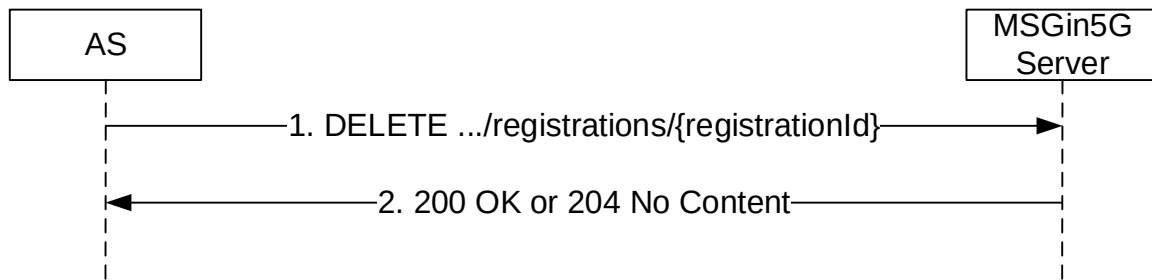


Figure 5.2.2.3.2-1: AS Deregistering from MSGin5G Server

To deregister itself from the MSGin5G Server, the AS shall send HTTP DELETE message to the MSGin5G Server on the "AS DeRegistration" collection resource, as specified in clause 8.1.2.3.3.2.

Upon receiving the HTTP DELETE request, the MSGin5G Server shall:

1. verify the identity of the AS and check if the AS is authorized to deregister the AS registration information;
2. if the AS is authorized to deregister the AS registration information, then the MSGin5G Server shall deregister the AS profile from the MSGin5G Server and delete the resource representing AS registration information; and
3. return the HTTP "200 OK" status code to the AS, indicating the successful deregistration of the AS information and shall include ASRegistrationAck data structure within the response body or HTTP "204 No Content" status code to the AS.

If the MSGin5G Server is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an alternative URI of the resource located in an alternative MSGin5G Server, as defined in clause 5.2.10 of 3GPP TS 29.122 [24].

If errors occur when processing the HTTP DELETE request, the MSGin5G Server shall apply error handling procedures as specified in clause 8.1.6.

5.3 MSGS_MSGDelivery Service

5.3.1 Service Description

The MSGS_MSGDelivery Service corresponding to Mm5s as defined in 3GPP TS 23.554 [2], is provided by the MSGin5G Server.

This service:

- allows AS invokes services provided by MSGin5G Server to send MSGin5G Messages and MSGin5G message delivery status reports to MSGin5G Server; and
- allows L3G/N3G invokes services provided by MSGin5G Server to send MSGin5G Messages and MSGin5G message delivery status reports to MSGin5G Server on behalf of Legacy 3GPP UE or Non-3GPP UE.
- allows BMG invokes services provided by MSGin5G Server to send MSGin5G message delivery status reports to MSGin5G Server.
- allows other MSGin5G Server invokes services provided by MSGin5G Server to send MSGin5G Messages and MSGin5G message delivery status reports to MSGin5G Server.

5.3.2 Service Operations

5.3.2.1 Introduction

The service operation defined for MSGS_MSGDelivery Service is shown in the Table 5.3.2.1-1.

Table 5.3.2.1-1: Operations of the MSGS_MSGDelivery Service

Service operation name	Description	Initiated by
MSGS_MSGDelivery_ASODelivery	This service operation is used by AS to deliver MSGin5G message to the MSGin5G Server. This service operation corresponds to clause 9.1.1.1.2 as defined in 3GPP TS 23.554 [2].	AS
MSGS_MSGDelivery_ASODeliveryReport	This service operation is used by AS to deliver the delivery status report to the MSGin5G Server. This service operation corresponds to clause 9.1.1.3.2 as defined in 3GPP TS 23.554 [2].	AS
MSGS_MSGDelivery_UEDelivery	This service operation is used by Legacy 3GPP Message Gateway or Non-3GPP Message Gateway (on behalf of Legacy 3GPP UE or Non-3GPP UE) to deliver MSGin5G message to the MSGin5G Server. This service operation corresponds to clause 9.1.1.2.2 as defined in 3GPP TS 23.554 [2].	Legacy 3GPP Message Gateway Non-3GPP Message Gateway MSGin5G Server
MSGS_MSGDelivery_UEDeliveryReport	This service operation is used by Message Gateway (on behalf Legacy 3GPP UE or Non-3GPP UE) to deliver the delivery status report to the MSGin5G Server. This service operation corresponds to clause 9.1.1.4.2 as defined in 3GPP TS 23.554 [2].	Legacy 3GPP Message Gateway Non-3GPP Message Gateway Broadcast Message Gateway MSGin5G Server

5.3.2.2 MSGS_MSGDelivery_ASODelivery

5.3.2.2.1 General

This service operation corresponding to clause 9.1.1.1.2 as defined in 3GPP TS 23.554 [2], is used by AS to deliver MSGin5G message to the MSGin5G Server.

5.3.2.2.2 AS Originating MSGin5G Message Delivery

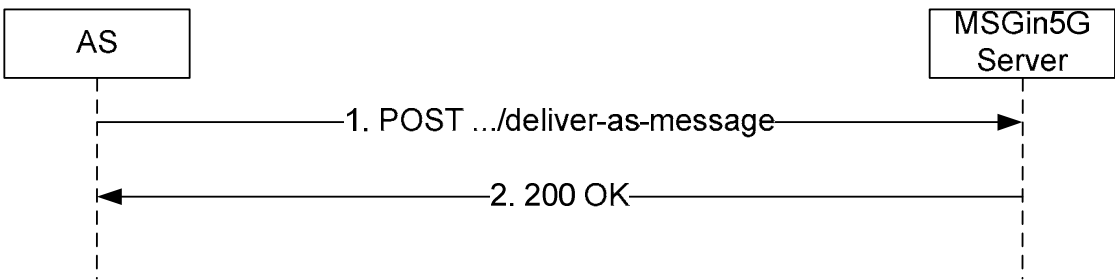


Figure 5.3.2.2.2-1: AS Originating MSGin5G Message Delivery

When the AS needs to send the message to the MSGin5G Server, the AS shall send the HTTP POST method as step 1 of the Figure 5.3.2.2.2-1.

The AS shall include ASMessageDelivery data structure in the content of the HTTP POST request.

The ASMessageDelivery data structure shall include:

- the AS Service ID within the "oriAddr" attribute;
- the Recipient Address within the "destAddr" attribute;
- the Message ID within the "msgId" attribute;
- the store and forward flag within the "stoAndFwInd" attribute; and

may include:

- the Application ID within the "appId" attribute;
- the indication whether the message delivery status report is required within the "delivStReqInd" attribute;
- the Payload within the "payload" attribute;
- the priority type within the "priority" attribute;
- the message segment flag within the "segInd" attribute;
- the message segment parameters within the "segParams" attribute, this attribute may include:
 - the segmentation set identifier within the "segId" attribute;
 - the total number of message segments within the "totalSegCount" attribute;
 - the message segment number within the "segNumb" attribute; and
 - the last segment flag within the "lastSegFlag" attribute;
- the store and forward parameters within the "stoAndFwParams" attribute, this attribute may include:
 - the message expiration time within the "exprTime" attribute;
- The latency within the "latency" attribute.
- The Notification URL within the "notiUrl" attribute.

When the MSGin5G Server receives the HTTP POST request from the AS, the MSGin5G Server shall make an authorization based on the information received from the AS. If the authorization is successful, the MSGin5G Server shall respond to the AS with a 200 OK message.

If the MSGin5G Server is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an alternative target URI of the custom operation located in an alternative MSGin5G Server, as defined in clause 5.2.10 of 3GPP TS 29.122 [24].

If errors occur when processing the HTTP POST request, the MSGin5G Server shall apply error handling procedures as specified in clause 8.2.6.

5.3.2.3 MSGS_MSGDelivery_ASODeliveryReport

5.3.2.3.1 General

This service operation corresponds to clause 9.1.1.3.2 as defined in 3GPP TS 23.554 [2], is used by AS to deliver the delivery status report to the MSGin5G Server.

5.3.2.3.2 AS Originating Message Delivery Status Report



Figure 5.3.2.3.2-1: AS Originating MSGin5G Delivery Report

When the AS needs to send the delivery report to the MSGin5G Server, the AS shall send the HTTP POST method as step 1 of the Figure 5.3.2.3.2-1.

The AS shall include DeliveryStatusReport data structure in the content of the HTTP POST request.

The DeliveryStatusReport data structure shall include:

- the AS Service ID within the "oriAddr" attribute;
- the Recipient Address within the "destAddr" attribute;
- the Message ID within the "msgId" attribute;
- the delivery status within the "delivSt" attribute; and

may include:

- the failure cause within the "failureCause" attribute;

When the MSGin5G Server receives the HTTP POST request from the AS, the MSGin5G Server shall make an authorization based on the information received from the AS. If the authorization is successful, the MSGin5G Server shall respond to the AS with a 200 OK message.

If the MSGin5G Server is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an alternative target URI of the custom operation located in an alternative MSGin5G Server, as defined in clause 5.2.10 of 3GPP TS 29.122 [24].


If errors occur when processing the HTTP POST request, the MSGin5G Server shall apply error handling procedures as specified in clause 8.2.6.

5.3.2.4 MSGS_MSGDelivery_UEODelivery

5.3.2.4.1 General

This service operation corresponds to clause 9.1.1.2.2 as defined in 3GPP TS 23.554 [2], is used by Legacy 3GPP Message Gateway (on behalf of Legacy 3GPP UE), Non-3GPP Message Gateway (on behalf of Non-3GPP UE) or other MSGin5G Server to deliver MSGin5G message to the MSGin5G Server.

5.3.2.4.2 UE Originating Message Delivery

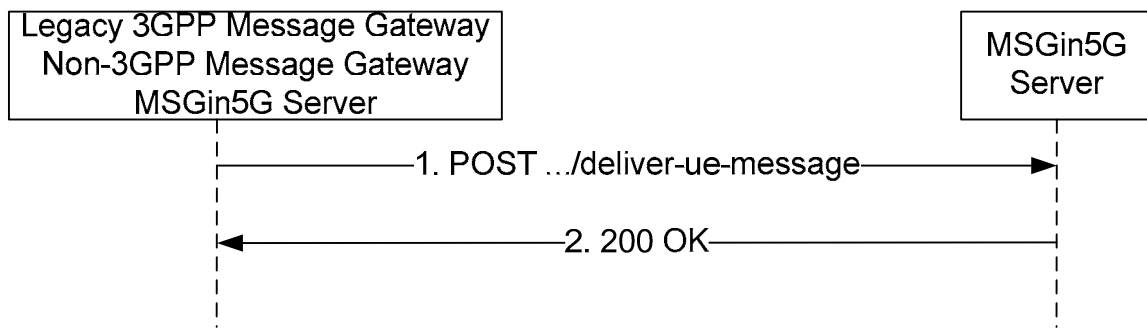**Figure 5.3.2.4.2-1: Legacy 3GPP UE or Non-3GPP UE Originating MSGin5G Message Delivery**

When the Legacy 3GPP Message Gateway (on behalf of Legacy 3GPP UE), Non-3GPP Message Gateway (on behalf of Non-3GPP UE) or other MSGin5G Server needs to send the message to the MSGin5G Server, the Legacy 3GPP Message Gateway, Non-3GPP Message Gateway or other MSGin5G Server shall send the HTTP POST method as step 1 of the Figure 5.3.2.4.2-1.

The Legacy 3GPP Message Gateway, Non-3GPP Message Gateway or other MSGin5G Server shall include UEMessageDelivery data structure in the content of the HTTP POST request.

The UEMessageDelivery data structure shall include:

- the Originating UE Service ID within the "oriAddr" attribute;
- the Recipient Address within the "destAddr" attribute;
- the Message ID within the "msgId" attribute; and
- the store and forward flag within the "stoAndFwInd" attribute;

and may include:

- the Application ID within the "appId" attribute;
- the Payload within the "payload" attribute;
- the indication whether the message delivery status report is required within the "delivStReqInd" attribute; and
- the message segment flag within the "segInd" attribute;
- the message segment parameters within the "segParams" attribute, this attribute may include:
 - the segmentation set identifier within the "segId" attribute;
 - the total number of message segments within the "totalSegCount" attribute;
 - the message segment number within the "segNumb" attribute;
 - the last segment flag within the "lastSegFlag" attribute;
- the store and forward parameters within the "stoAndFwParams" attribute, this attribute may include:
 - the message expiration time within the "exprTime" attribute;

When the MSGin5G Server receives the HTTP POST request from the Legacy 3GPP Message Gateway, Non-3GPP Message Gateway or other MSGin5G Server, the MSGin5G Server shall make an authorization based on the information received from the Legacy 3GPP Message Gateway, Non-3GPP Message Gateway or other MSGin5G Server. If the authorization is successful, the MSGin5G Server shall respond to the Legacy 3GPP Message Gateway, Non-3GPP Message Gateway or other MSGin5G Server with a 200 OK message.

If the MSGin5G Server is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an alternative

target URI of the custom operation located in an alternative MSGin5G Server, as defined in clause 5.2.10 of 3GPP TS 29.122 [2].

If errors occur when processing the HTTP POST request, the MSGin5G Server shall apply error handling procedures as specified in clause 8.2.6.

5.3.2.5 MSGS_MSGDelivery_UEDeliveryReport

5.3.2.5.1 General

This service operation corresponds to clause 9.1.1.4.2 as defined in 3GPP TS 23.554 [2], is used by Message Gateway (on behalf Legacy 3GPP UE or Non-3GPP UE) or other MSGin5G Server to deliver the delivery status report to the MSGin5G Server.

5.3.2.5.2 UE Originating Message Delivery Status Report

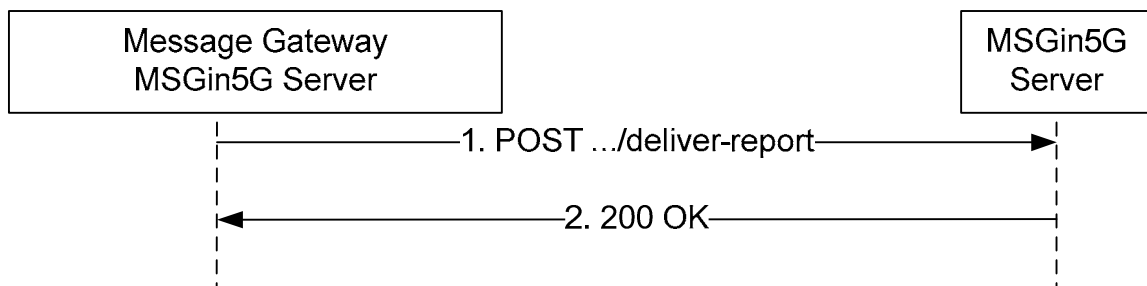


Figure 5.3.2.5.2-1: Legacy 3GPP UE or Non-3GPP UE Originating MSGin5G Delivery Report

When the Message Gateway (on behalf of Legacy 3GPP UE or Non-3GPP UE) or other MSGin5G Server needs to send the delivery report to the MSGin5G Server, the Message Gateway or other MSGin5G Server shall send the HTTP POST method as step 1 of the Figure 5.3.2.5.2-1.

The Message Gateway or other MSGin5G Server shall include DeliveryStatusReport data structure in the content of the HTTP POST request.

The DeliveryStatusReport data structure shall include:

- the Originating UE Service ID within the "oriAddr" attribute;
- the Recipient Address within the "destAddr" attribute;
- the Message ID within the "msgId" attribute; and
- the delivery status within the "delivSt" attribute;

and may include:

- The failure cause within the "failureCause" attribute;

When the MSGin5G Server receives the HTTP POST request from the Message Gateway or other MSGin5G Server, the MSGin5G Server shall make an authorization based on the information received from the Message Gateway or other MSGin5G Server. If the authorization is successful, the MSGin5G Server shall respond to the Message Gateway or other MSGin5G Server with a 200 OK message.

If the MSGin5G Server is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an alternative target URI of the custom operation located in an alternative MSGin5G Server, as defined in clause 5.2.10 of 3GPP TS 29.122 [2].

If errors occur when processing the HTTP POST request, the MSGin5G Server shall apply error handling procedures as specified in clause 8.2.6.

5.4 MSGS_TopiclistEvent Service

5.4.1 Service Description

The MSGS_TopiclistEvent API Service corresponding to Mm5s as defined in 3GPP TS 23.554 [2], is provided by the MSGin5G Server.

This service:

- allows another MSGin5G Server invokes services provided by MSGin5G Server to subscribe or unsubscribe to MSGin5G Messaging Topic;
- allows another MSGin5G Server invokes services provided by MSGin5G Server to subscribe or unsubscribe to MSGin5G Messaging Topic list;
- allows another MSGin5G Server invokes services provided by MSGin5G Server to notify changes of MSGin5G Messaging Topic list;

5.4.2 Service Operations

5.4.2.1 Introduction

The service operation defined for MSGS_TopiclistEvent service is shown in the Table 5.4.2.1-1, corresponds to clause 9.1.1.6 as defined in 3GPP TS 23.554 [2].

Table 5.4.2.1-1: Operations of the MSGS_TopiclistEvent Service

Service operation name	Description	Initiated by
MSGS_TopiclistEvent_SubscribeMSGTopiclist	This service operation is used by MSGin5G Server to subscribe to Messaging Topic list on another MSGin5G Server.	MSGin5G Server
MSGS_TopiclistEvent_UnsubscribeMSGTopiclist	This service operation is used by MSGin5G Server to unsubscribe to Messaging Topic list on another MSGin5G Server.	MSGin5G Server
MSGS_TopiclistEvent_NotifyMSGTopiclist	This service operation is used by MSGin5G Server, to deliver the notification of Messaging Topic list changes.	MSGin5G Server
MSGS_TopiclistEvent_SubscribeMSGTopic	This service operation is used by MSGin5G Server (on behalf of Application Server or MSGin5G Client) to subscribe to Messaging Topic on the MSGin5G Server.	MSGin5G Server
MSGS_TopiclistEvent_UnsubscribeMSGTopic	This service operation is used by MSGin5G Server (on behalf of Application Server or MSGin5G Client) to unsubscribe to Messaging Topic on the MSGin5G Server.	MSGin5G Server

5.4.2.2 MSGS_TopiclistEvent_SubscribeMSGTopiclist

5.4.2.2.1 General

This service operation is used by MSGin5G Server to subscribe to Messaging Topic list on another MSGin5G Server, corresponds to clause 9.1.1.6.2 as defined in 3GPP TS 23.554 [2].

5.4.2.2.2 MSGin5G Server subscribing to MSGin5G Messaging Topic List

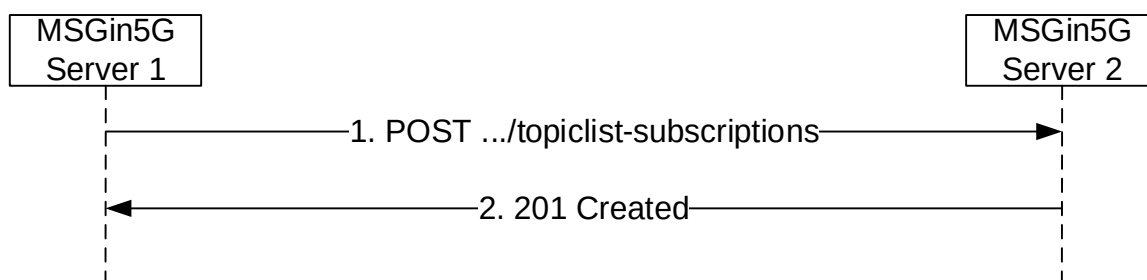


Figure 5.4.2.2.2-1: MSGin5G Server Subscribing to Messaging Topic List

To subscribe MSGin5G Messaging Topic list on another MSGin5G Server 2, the MSGin5G Server 1 shall send an HTTP POST message to the MSGin5G Server 2 on the "Topic List Subscriptions" collection resource. The body of the HTTP POST message shall include TopicListSubscription data structure.

Upon receiving the HTTP POST message from the MSGin5G Server 1, the MSGin5G Server 2 shall:

1. make an authorization based on the information received from from MSGin5G Server 1;
2. checks the locally stored Messaging Topic list subscription(s):
 - a. If the MSGin5G Server 1's subscription has already been created, the MSGin5G Server 2 updates the validity time of this subscription;
 - b. If the MSGin5G Server 1's subscription has not been created, the MSGin5G Server 2 creates new subscription; and

If the subscription request is successfully processed, the MSGin5G Server 2 shall respond to the MSGin5G Server 1 with an HTTP "201 Created" status code, including an HTTP Location header field containing the URI of the created "Topic List Subscription" resource and the response body containing TopicListSubscription data structure that shall contain the representation of the created resource within the TopicListSubscription data structure.

If errors occur when processing the HTTP POST request, the MSGin5G Server 2 shall apply error handling procedures as specified in clause 8.3.6.

5.4.2.3 MSGS_TopiclistEvent_UnsubscribeMSGTopiclist

5.4.2.3.1 General

This service operation is used by MSGin5G Server to subscribe to Messaging Topic list on another MSGin5G Server, corresponds to clause 9.1.1.6.6 as defined in 3GPP TS 23.554 [2].

5.4.2.3.2 MSGin5G Server Unsubscribing to MSGin5G Messaging Topic List

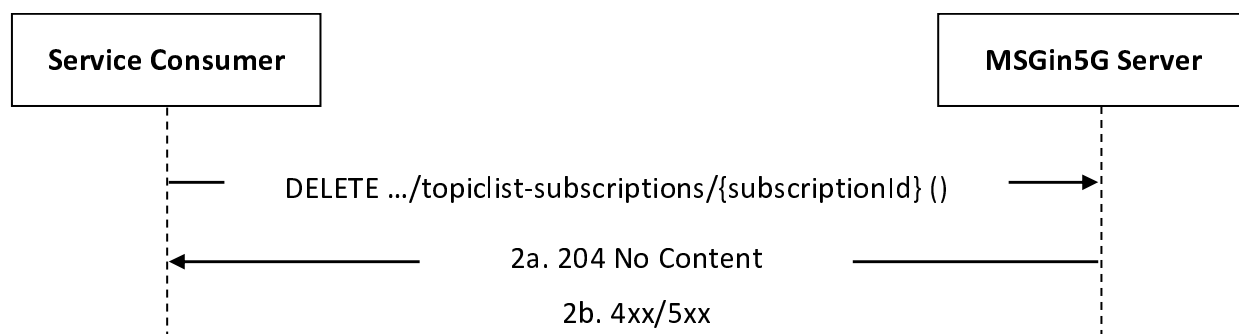


Figure 5.4.2.3.2-1: MSGin5G Server Unsubscribing to Messaging Topic List

As shown in Figure 5.4.2.3.2-1, to unsubscribe MSGin5G Messaging Topic list on the MSGin5G Server 2, the MSGin5G Server 1 shall send HTTP DELETE request message to the MSGin5G Server 2 on the "Individual Topic List Subscription" collection resource, where "{subscriptionId}" is the identifier of the existing Messaging Topic list subscription that is to be deleted.

Upon receiving the HTTP DELETE request message from the MSGin5G Server 1, the MSGin5G Server 2 shall make an authorization based on the information received. If the authorization is successful, the MSGin5G Server 2 shall remove the corresponding subscription. If the unsubscription request is successfully processed, the MSGin5G Server 2 shall respond to the MSGin5G Server 1 with an HTTP "204 No Content" status code.

If the MSGin5G Server is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an alternative URI of the resource located in an alternative MSGin5G Server, as defined in clause 5.2.10 of 3GPP TS 29.122 [3].

If errors occur when processing the HTTP POST request, the MSGin5G Server 2 shall apply error handling procedures as specified in clause 8.3.6.

5.4.2.4 MSGS_TopiclistEvent_NotifyMSGTopiclist

5.4.2.4.1 General

This service operation is used by MSGin5G Server 1 to notify another MSGin5G Server 2 about changes of Messaging Topic list, corresponds to clause 9.1.1.6.3 as defined in 3GPP TS 23.554 [2].

5.4.2.4.2 Notification about MSGin5G Messaging Topic List

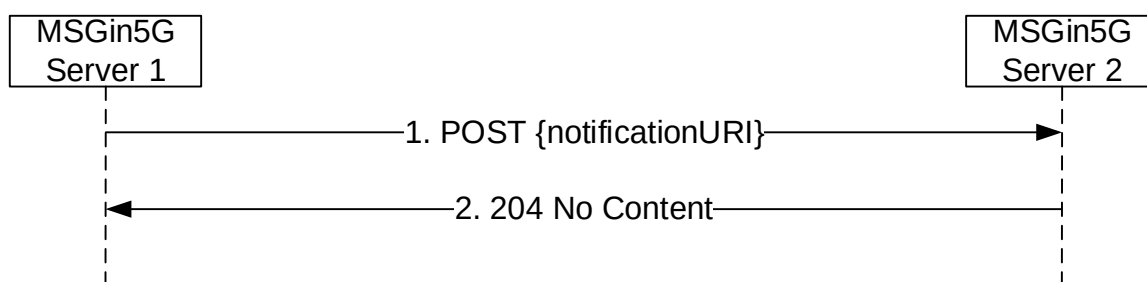


Figure 5.4.2.4.2-1:MSGin5G Server Notification about Messaging Topic List

As shown in Figure 5.4.2.4.2-1, the MSGin5G Server 1 shall invoke the MSGS_TopiclistEvent_NotifyMSGTopiclist service operation to notify about subscribed Messaging Topic list events. The MSGin5G Server 1 shall send HTTP POST request to the MSGin5G Server 2 with "{notificationURI}" previously received in the subscription. The TopicListNotification data structure provided in the request body shall include:

- The Messaging Topic list exists in MSGin5G Server 1 within the "msgTopics" attribute, this attribute may include:
 - the unique topic identifier within the "msgTopic" attribute;
 - the topic update status indicating if such topic is newly created or deleted within the "updateStat" attribute;

and may include:

- the Expiration within the "exprTime" attribute;

Upon receiving the HTTP POST message from the MSGin5G Server 1, the MSGin5G Server 2 shall make an authorization based on the information received. If the authorization is successful, the MSGin5G Server 2 shall update locally stored Messaging Topic list, and respond to the MSGin5G Server 1 with an HTTP "204 No Content" status code.

If the MSGin5G Server 2 is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an

alternative URI representing the end point of an alternative service consumer towards which the notification should be sent, as defined in clause 5.2.10 of 3GPP TS 29.122 [3].

If errors occur when processing the HTTP POST request, the MSGin5G Server 2 shall apply error handling procedures as specified in clause 8.3.6.

5.4.2.5 MSGS_TopiclistEvent_SubscribeMSGTopic

5.4.2.5.1 General

This service operation is used by MSGin5G Server 1 to subscribe to Messaging Topic on another MSGin5G Server 2, corresponding to clause 9.1.1.6.4 as defined in 3GPP TS 23.554 [2].

5.4.2.5.2 MSGin5G Server Subscribing to MSGin5G Messaging Topic

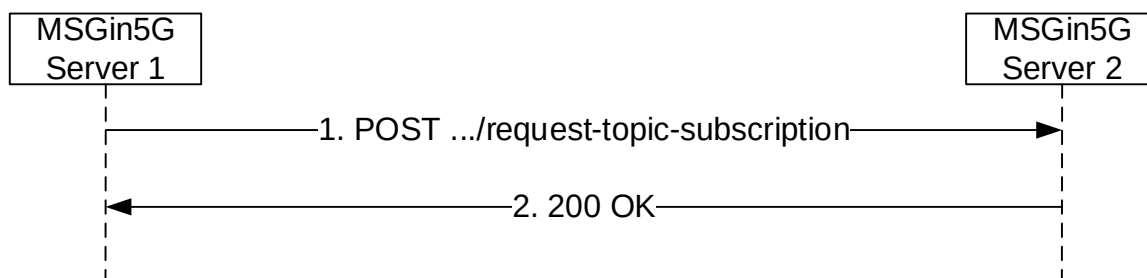


Figure 5.4.2.5.2-1:Subscribing to Messaging Topic List

As shown in Figure 5.4.2.5.2-1, to subscribe MSGin5G Messaging Topic on the MSGin5G Server 2, the MSGin5G Server 1 shall send the HTTP POST method. The body of the HTTP POST message shall include TopicSubscription data structure.

Upon receiving the HTTP POST message, the MSGin5G Server 2 shall:

1. make an authorization based on the information received;
2. checks the locally stored Messaging Topic subscription(s):
 - a. If the requested subscription has already been created, the MSGin5G Server 2 updates the validity time of this subscription;
 - b. If the requested subscription has not been created, the MSGin5G Server 2 creates new subscription; and

If the subscription request is successfully processed, the MSGin5G Server 2 shall respond with an HTTP "200 OK" status code with the response body containing TopicSubscriptionAck data structure.

If the MSGin5G Server 2 is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an alternative target URI of the custom operation located in an alternative MSGin5G Server, as defined in clause 5.2.10 of 3GPP TS 29.122 [2].

If errors occur when processing the HTTP POST request, the MSGin5G Server 2 shall apply error handling procedures as specified in clause 8.3.6.

5.4.2.6 MSGS_TopiclistEvent_UnsubscribeMSGTopic

5.4.2.6.1 General

This service operation is used by MSGin5G Server to unsubscribe to Messaging Topic(s) on another MSGin5G Server, corresponding to clause 9.1.1.6.7 as defined in 3GPP TS 23.554 [2].

5.4.2.6.2 MSGin5G Server Unsubscribing to MSGin5G Messaging Topic

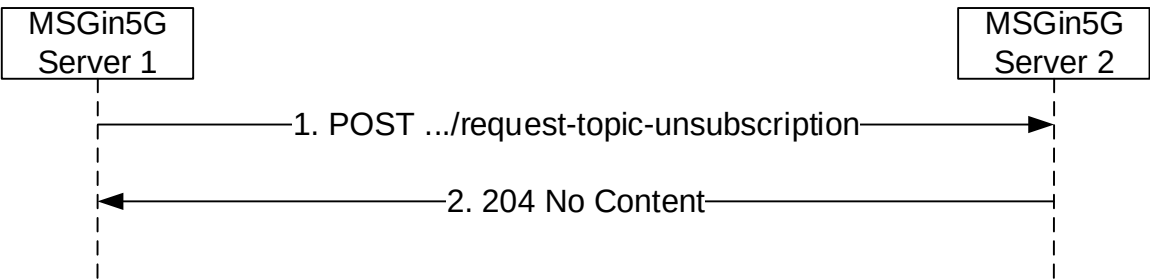


Figure 5.4.2.6.2-1:Unsubscribing to Messaging Topic(s)

As shown in Figure 5.4.2.6.2-1, to unsubscribe one or more MSGin5G Messaging Topic(s) on the MSGin5G Server 2, the MSGin5G Server 1 shall send HTTP POST message to the MSGin5G Server 2. The body of the HTTP POST message shall include TopicUnsubscription data structure.

Upon receiving the HTTP POST message, the MSGin5G Server 2 shall make an authorization based on the information received. If the authorization is successful, the MSGin5G Server 2 shall remove the corresponding subscription and respond with an HTTP "204 No Content" status code.

If the MSGin5G Server 2 is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an alternative target URI of the custom operation located in an alternative MSGin5G Server, as defined in clause 5.2.10 of 3GPP TS 29.122 [2].

If errors occur when processing the HTTP POST request, the MSGin5G Server 2 shall apply error handling procedures as specified in clause 8.3.6.

6 Services offered by the Message Gateway

6.1 Introduction

The Table 6.1-1 lists the services provided by the MSGin5G Message Gateway and corresponding service operations. A service description clause for each API gives a general description of the related API.

Table 6.1-1 List of services provided by the MSGin5G Message Gateway

Service Name	Service Operations	Operation Semantics	Example Consumer(s)
MSGG_L3GDelivery	MSGG_L3GDelivery_GTDelivery	Request/Response	MSGin5G Server
	MSGG_L3GDelivery_GTDeliveryReport		
MSGG_N3GDelivery	MSGG_N3GDelivery_GTDelivery	Request/Response	MSGin5G Server
	MSGG_N3GDelivery_GTDeliveryReport		
MSGG_BGDelivery	MSGG_BGDelivery_GTDelivery	Request/Response	MSGin5G Server

Table 6.1-2 summarizes the corresponding APIs defined in this specification.

Table 6.1-2: API Descriptions

Service Name	Clause	Description	OpenAPI Specification File	apiName	Annex
MSGG_L3GDelivery	9.1	L3G Message Delivery Service	TS29538_MSGG_L3GDelivery.yaml	msgg-l3gdelivery	A.4
MSGG_N3GDelivery	9.2	N3G Message Delivery Service	TS29538_MSGG_N3GDelivery.yaml	msgg-n3gdelivery	A.5
MSGG_BGDelivery	9.3	BMG Message Delivery Service	TS29538_MSGG_BGDelivery.yaml	msgg-bgdelivery	A.6

6.2 MSGG_L3GDelivery Service

6.2.1 Service Description

The MSGG_L3GDelivery Service corresponding to Ml3g as defined in 3GPP TS 23.554 [2], is provided by the Legacy 3GPP Message Gateway.

This service:

- allows MSGin5G Server invokes services provided by Legacy 3GPP Message Gateway to send MSGin5G Messages to Legacy 3GPP Message Gateway.

6.2.2 Service Operations

6.2.2.1 Introduction

The service operation defined for MSGG_L3GDelivery Service is shown in the table 6.2.2.1-1.

Table 6.2.2.1-1: Operations of the MSGG_L3GDelivery Service

Service operation name	Description	Initiated by
MSGG_L3GDelivery_GTDelivery	This service operation is used by MSGin5G Server to deliver MSGin5G message to Legacy 3GPP Message Gateway. This service operation corresponds to clause 9.2.1.1.2 as defined in 3GPP TS 23.554 [2].	MSGin5G Server
MSGG_L3GDelivery_GTDeliveryReport	This service operation is used by MSGin5G Server to deliver the delivery status report to Legacy 3GPP Message Gateway. This service operation corresponds to clause 9.2.1.3.2 as defined in 3GPP TS 23.554 [2].	MSGin5G Server

6.2.2.2 MSGG_L3GDelivery_GTDelivery

6.2.2.2.1 General

This service operation corresponds to clause 9.2.1.1.2 as defined in 3GPP TS 23.554 [2], is used by MSGin5G Server to deliver MSGin5G message to the Legacy 3GPP Message Gateway.

6.2.2.2.2 Legacy 3GPP Message Gateway Terminating Message Delivery



Figure 6.2.2.2.2-1: Legacy 3GPP Message Gateway Terminating Message Delivery

When the MSGin5G Server needs to send the message to the Legacy 3GPP Message Gateway, the MSGin5G Server shall send the HTTP POST request towards the "deliver-message" resource as shown in Figure 6.2.2.2.2-1.

The MSGin5G Server shall send a POST request to the resource with an L3gMessageDelivery object in the request body.

The L3gMessageDelivery data type shall include:

- the Originating UE Service ID/AS Service ID within the "oriAddr" attribute;
- the Recipient UE Service ID within the "destAddr" attribute;
- the Message ID within the "msgId" attribute; and

may include:

- the Application ID within the "appId" attribute;
- the indication whether the message delivery status report is required within the "delivStReqInd" attribute;
- the Payload within the "payload" attribute;
- the Message is segmented within the "segInd" attribute; and
- the message segment parameters within the "segParams" attribute, this attribute may include:
 - the segmentation set identifier within the "segId" attribute;
 - the total number of message segments within the "totalSegCount" attribute;
 - the message segment number within the "segNumb" attribute; and
 - the last segment flag within the "lastSegFlag" attribute.

When the Legacy 3GPP Message Gateway receives the HTTP POST request from the MSGin5G Server, the Legacy 3GPP Message Gateway shall respond to the MSGin5G Server with a 204 No Content message.

If the Legacy Message Gateway is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an alternative target URI of the custom operation located in an alternative MSGin5G Message Gateway, as defined in clause 5.2.10 of 3GPP TS 29.122 [2].

If errors occur when processing the HTTP POST request, the Legacy 3GPP Message Gateway shall apply error handling procedures as specified in clause 9.1.6.

6.2.2.3 MSGG_L3GDelivery_GTDeliveryReport

6.2.2.3.1 General

This service operation corresponds to clause 9.2.1.3.2 as defined in 3GPP TS 23.554 [2], is used by MSGin5G Server to deliver the delivery status report to the Legacy 3GPP Message Gateway.

6.2.2.3.2 Legacy 3GPP Message Gateway Terminating Message Delivery Status Report

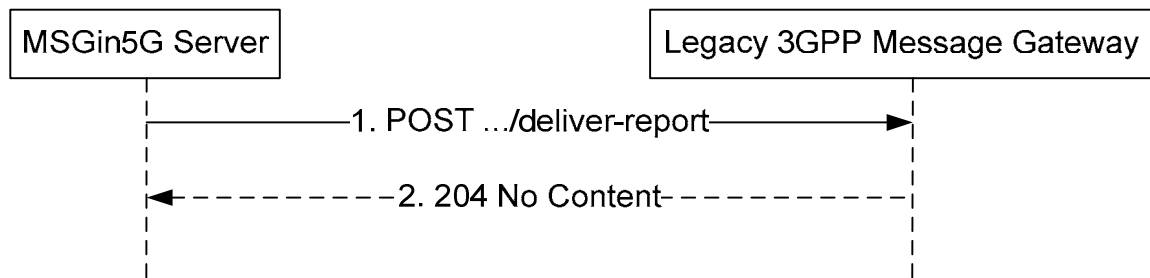


Figure 6.2.2.3.2-1: Legacy 3GPP Message Gateway Terminating Delivery Status Report

When the MSGin5G Server needs to send the delivery status report to the Legacy 3GPP Message Gateway, the MSGin5G Server shall send the HTTP POST request towards the "deliver-report" resource as shown in Figure 6.2.2.3.2-1.

The MSGin5G Server shall send a POST request to the resource with a `DeliveryStatusReport` object in the request body.

The `DeliveryStatusReport` data type shall include:

- the Originating UE Service ID/AS Service ID within the "oriAddr" attribute;
- the Recipient UE Service ID within the "destAddr" attribute;
- the Message ID within the "msgId" attribute;
- the delivery status within the "delivSt" attribute; and

may include:

- the failure cause within the "failureCause" attribute.

When the Legacy 3GPP Message Gateway receives the HTTP POST request from the MSGin5G Server, the Legacy 3GPP Message Gateway shall respond to the MSGin5G Server with a 204 No Content message.

If the Legacy Message Gateway is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an alternative target URI of the custom operation located in an alternative MSGin5G Message Gateway, as defined in clause 5.2.10 of 3GPP TS 29.122 [2].

If errors occur when processing the HTTP POST request, the Legacy 3GPP Message Gateway shall apply error handling procedures as specified in clause 9.1.6.

6.3 MSGG_N3GDelivery Service

6.3.1 Service Description

The `MSGG_N3GDelivery` Service corresponding to `Mn3g` as defined in 3GPP TS 23.554 [2], is provided by the Non-3GPP Message Gateway.

This service:

- allows MSGin5G Server invokes services provided by Non-3GPP Message Gateway to send MSGin5G Messages to Non-3GPP Message Gateway.

6.3.2 Service Operations

6.3.2.1 Introduction

The service operation defined for `MSGG_N3GDelivery` Service is shown in the table 6.3.2.1-1.

Table 6.3.2.1-1: Operations of the MSGG_N3GDelivery Service


Service operation name	Description	Initiated by
MSGG_N3GDelivery_GTDelivery	This service operation is used by MSGin5G Server to deliver MSGin5G message to Non-3GPP Message Gateway. This service operation corresponds to clause 9.2.2.1.2 as defined in 3GPP TS 23.554 [2].	MSGin5G Server
MSGG_N3GDelivery_GTDeliveryReport	This service operation is used by MSGin5G Server to deliver the delivery status report to Non-3GPP Message Gateway. This service operation corresponds to clause 9.2.2.2.2 as defined in 3GPP TS 23.554 [2].	MSGin5G Server

6.3.2.2 MSGG_N3GDelivery_GTDelivery

6.3.2.2.1 General

This service operation corresponds to clause 9.2.2.1.2 as defined in 3GPP TS 23.554 [2], is used by MSGin5G Server to deliver MSGin5G message to the Non-3GPP Message Gateway.

6.3.2.2.2 Non-3GPP Message Gateway Terminating Message Delivery

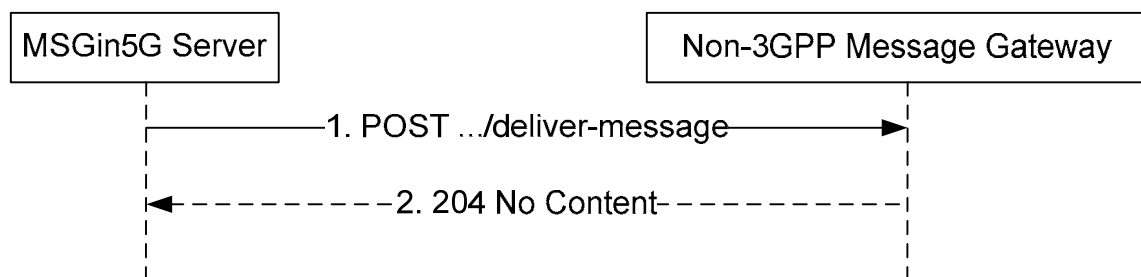**Figure 6.3.2.2.2-1: Non-3GPP Message Gateway Terminating Message Delivery**

When the MSGin5G Server needs to send the message to the Non-3GPP Message Gateway, the MSGin5G Server shall send the HTTP POST request towards the "deliver-message" resource as shown in figure 6.3.2.2.2-1.

The MSGin5G Server shall send a POST request to the resource with an N3gMessageDelivery object in the request body.

The N3gMessageDelivery data type shall include:

- the Originating UE Service ID/AS Service ID within the "oriAddr" attribute;
- the Recipient UE Service ID within the "destAddr" attribute;
- the Message ID within the "msgId" attribute; and

may include:

- the Application ID within the "appId" attribute;
- the indication whether the message delivery status report is required within the "delivStReqInd" attribute;
- the Payload within the "payload" attribute;
- the Message is segmented within the "segInd" attribute; and
- the message segment parameters within the "segParams" attribute, this attribute may include:
 - the segmentation set identifier within the "segId" attribute;

- the total number of message segments within the "totalSegCount" attribute;
- the message segment number within the "segNumb" attribute; and
- the last segment flag within the "lastSegFlag" attribute.

When the Non-3GPP Message Gateway receives the HTTP POST request from the MSGin5G Server, the Non-3GPP Message Gateway shall respond to the MSGin5G Server with a 204 No Content message.

If the Non-3GPP Message Gateway is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an alternative target URI of the custom operation located in an alternative MSGin5G Message Gateway, as defined in clause 5.2.10 of 3GPP TS 29.122 [2].

If errors occur when processing the HTTP POST request, the Non-3GPP Message Gateway shall apply error handling procedures as specified in clause 9.2.6.

6.3.2.3 MSGG_N3GDDelivery_GTDeliveryReport

6.3.2.3.1 General

This service operation corresponds to clause 9.2.2.2.2 as defined in 3GPP TS 23.554 [2], is used by MSGin5G Server to deliver the delivery status report to the Non-3GPP Message Gateway.

6.3.2.3.2 Non-3GPP Message Gateway Terminating Message Delivery Status Report

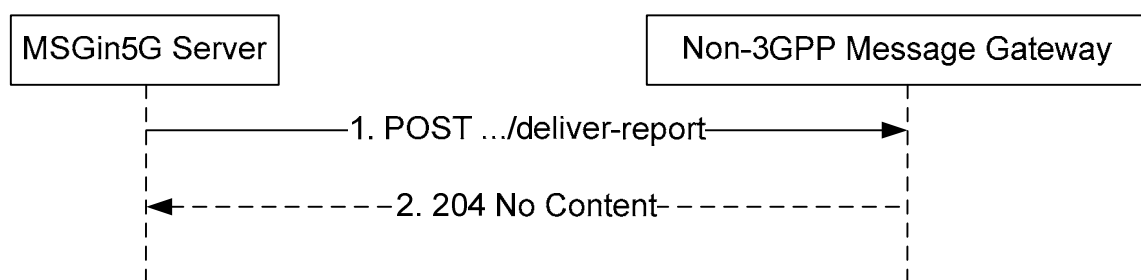


Figure 6.3.2.3.2-1: Non-3GPP Message Gateway Terminating Delivery Status Report

When the MSGin5G Server needs to send the delivery status report to the Non-3GPP Message Gateway, the MSGin5G Server shall send the HTTP POST request towards the "deliver-report" resource as shown in figure 6.3.2.3.2-1.

The MSGin5G Server shall send a POST request to the resource with a DeliveryStatusReport object in the request body.

The DeliveryStatusReport data type shall include:

- the Originating UE Service ID/AS Service ID within the "oriAddr" attribute;
- the Recipient UE Service ID within the "destAddr" attribute;
- the Message ID within the "msgId" attribute;
- the delivery status within the "delivSt" attribute; and

may include:

- the failure cause within the "failureCause" attribute.

When the Non-3GPP Message Gateway receives the HTTP POST request from the MSGin5G Server, the Non-3GPP Message Gateway shall respond to the MSGin5G Server with a 204 No Content message.

If the Non-3GPP Message Gateway is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an alternative target URI of the custom operation located in an alternative MSGin5G Message Gateway, as defined in clause 5.2.10 of 3GPP TS 29.122 [2].

If errors occur when processing the HTTP POST request, the Non-3GPP Message Gateway shall apply error handling procedures as specified in clause 9.2.6.

6.4 MSGG_BGDelivery Service

6.4.1 Service Description

The MSGG_BGDelivery Service corresponding to Mbg as defined in 3GPP TS 23.554 [2], is provided by the Broadcast Message Gateway.

This service:

- allows MSGin5G Server invokes services provided by Broadcast Message Gateway to deliver MSGin5G messages to Broadcast Message Gateway.

6.4.2 Service Operations

6.4.2.1 Introduction

The service operation defined for MSGG_BGDelivery Service is shown in the table 6.4.2.1-1.

Table 6.4.2.1-1: Operations of the MSGG_BGDelivery Service

Service operation name	Description	Initiated by
MSGG_BGDelivery_GTDelivery	This service operation is used by MSGin5G Server to deliver MSGin5G message to Broadcast Message Gateway. This service operation corresponds to clause 9.2.3.1.2 as defined in 3GPP TS 23.554 [2].	MSGin5G Server

6.4.2.2 MSGG_BGDelivery_GTDelivery

6.4.2.2.1 General

This service operation corresponds to clause 9.2.3.1.2 as defined in 3GPP TS 23.554 [2], is used by MSGin5G Server to deliver MSGin5G message to the Broadcast Message Gateway.

6.4.2.2.2 Broadcast Message Gateway Terminating Message Delivery



Figure 6.4.2.2.2-1: Broadcast Message Gateway Terminating Message Delivery

When the MSGin5G Server needs to send the message to the Broadcast Message Gateway, the MSGin5G Server shall send the HTTP POST request towards the "deliver-message" resource as shown in Figure 6.4.2.2.2-1.

The MSGin5G Server shall send a POST request to the resource with an BgMessageDelivery object in the request body.

The BgMessageDelivery data type shall include:

- the Originating UE Service ID/AS Service ID within the "oriAddr" attribute;

- the Message ID within the "msgId" attribute;
- may include:
- the Recipient ID within the "destAddr" attribute;
 - the Payload within the "payload" attribute; and
 - the Application ID within the "appId" attribute; and
 - the indication whether the message delivery status report is required within the "delivStReqInd" attribute;
 - the priority type within the "priority" attribute;
 - the message segment flag within the "segInd" attribute; and
 - the message segment parameters within the "segParams" attribute, this attribute may include:
 - the segmentation set identifier within the "segId" attribute;
 - the total number of message segments within the "totalSegCount" attribute;
 - the message segment number within the "segNumb" attribute; and
 - the last segment flag within the "lastSegFlag" attribute.

When the Broadcast Message Gateway receives the HTTP POST request from the MSGin5G Server, the Broadcast Message Gateway shall respond to the MSGin5G Server with a 204 No Content message.

If the Broadcast Message Gateway is not able to handle the request, it may respond with an HTTP "307 Temporary Redirect" status code or an HTTP "308 Permanent Redirect" status code including an HTTP "Location" header containing an alternative target URI of the custom operation located in an alternative MSGin5G Message Gateway, as defined in clause 5.2.10 of 3GPP TS 29.122 [2].

If errors occur when processing the HTTP POST request, the Broadcast Message Gateway shall apply error handling procedures as specified in clause 9.3.6.

7 Common information applicable to several APIs

7.1 General

MSGin5G APIs allow secure access to the capabilities provided by the MSGin5G.

This document specifies the procedures triggered at different functional entities as a result of API invocation requests and event notifications. The stage-2 level requirements and signalling flows are defined in 3GPP TS 23.554 [2].

Several design aspects, as mentioned in the following clauses, are specified in 3GPP TS 29.122 [24] and referenced by this specification.

7.2 Data Types

7.2.1 General

This clause defines structured data types, simple data types and enumerations that are applicable to several APIs defined in the present specification and can be referenced from data structures defined in the subsequent clauses.

In addition, data types that are defined in OpenAPI Specification [6] can also be referenced from data structures defined in the subsequent clauses.

NOTE: As a convention, data types in the present specification are written with an upper-case letter in the beginning. Parameters are written with a lower-case letter in the beginning. As an exception, data types that are also defined in OpenAPI Specification [6] can use a lower-case case letter in the beginning for consistency.

Table 7.2.1-1 specifies data types re-used by the MSGin5G from other specifications, including a reference to their respective specifications and when needed, a short description of their use within the APIs of this specification.

Table 7.2.1-1: Re-used Data Types

Data type	Reference	Comments

7.2.2 Referenced structured data types

Table 7.2.2-1 lists structured data types defined in this specification referenced by multiple services.

Table 7.2.2-1: Referenced Structured Data Types

Data type	Reference	Description
Address	Clause 9.1.5.2.3	Represent an address
DeliveryStatusReport	Clause 8.2.5.2.7	The message delivery status report request information.
MessageSegmentParameters	Clause 8.2.5.2.5	Parameters for message segmentation

7.2.3 Referenced Simple data types and enumerations

Following simple data types defined in Table 7.2.3.1-1 are applicable to several APIs in this document:

Table 7.2.3.1-1: Simple data types applicable to several APIs

Type name	Reference	Description

7.3 Usage of HTTP

For MSGin5G APIs, support of HTTP/1.1 (IETF RFC 9110 [11], IETF RFC 9111 [14] and IETF RFC 9112 [10]) over TLS is mandatory and support of HTTP/2 (IETF RFC 9113 [16]) over TLS is recommended.

A functional entity desiring to use HTTP/2 shall use the HTTP upgrade mechanism to negotiate applicable HTTP version as described in IETF RFC 9113 [16].

7.4 Content type

JSON, IETF RFC 8259 [17], shall be used as content type of the HTTP bodies specified in the present specification as specified in clause 5.2.3 of 3GPP TS 29.122 [24]. The use of the JSON format shall be signalled by the content type "application/json".

7.5 URI structure

7.5.1 Resource URI structure

The resource URI structure of all the APIs specified in this document shall be as specified in clause 5.2.4.1 of 3GPP TS 29.122 [24].

7.5.2 Custom operations URI structure

The URI of a custom operation which is associated with a resource shall be as specified in clause 5.2.4.2 of 3GPP TS 29.122 [24].

7.6 Notifications

None.

7.7 Error Handling

HTTP error handling shall be supported as specified in clause 5.2.6 of 3GPP TS 29.122 [24].

7.8 Feature negotiation

The procedures in clause 5.2.7 of 3GPP TS 29.122 [24] shall be applicable for the APIs defined in the present specification. For each of the APIs defined, the applicable list of features is contained in the related API definition.

7.9 HTTP headers

The MSGin5G API shall support HTTP custom header fields specified in clause 5.2.8 of 3GPP TS 29.122 [24]. No specific custom headers are defined for the MSGin5G API in the present specification.

7.10 Conventions for Open API specification files

The conventions for Open API specification files as specified in clause 5.2.9 of 3GPP TS 29.122 [24] shall be applicable for all APIs in this document.

8 Message Server API definition

8.1 MSGS_ASRegistration API

8.1.1 API URI

The MSGS_ASRegistration service shall use the MSGS_ASRegistration API.

The request URIs used in HTTP requests from the AS towards the MSGin5G Server shall have the Resource URI structure as defined in clause 7.5 with the following clarifications:

- The <apiName> shall be "msg-asregistration".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 8.1.2.

8.1.2 Resources

8.1.2.1 Overview

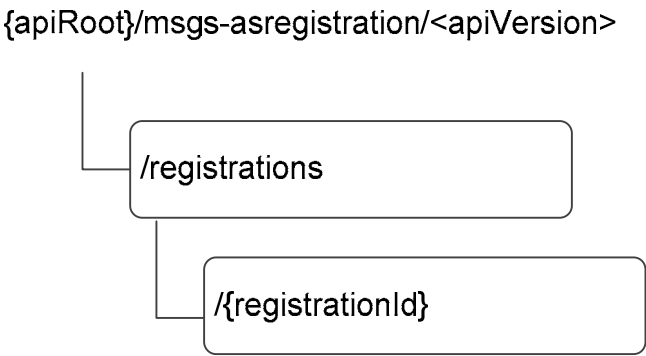


Figure 8.1.2.1-1: Resource URI structure of the MSGS_ASRegistration API

Table 8.1.2.1-1 provides an overview of the resources and applicable HTTP methods.

Table 8.1.2.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
AS Registrations	/registrations	POST	Registers a new AS at the MSGin5G Server.
AS DeRegistration	/registrations/{registrationId}	DELETE	Removes an AS registration resource.

8.1.2.2 Resource: AS Registrations

8.1.2.2.1 Description

This resource represents all the Application Servers that are registered at a given MSGin5G Server.

8.1.2.2.2 Resource Definition

Resource URI: {apiRoot}/msgs-asregistration/<apiVersion>/registrations

This resource shall support the resource URI variables defined in the table 8.1.2.2.2-1.

Table 8.1.2.2.2-1: Resource URI variables for this resource

Name	Data Type	Definition
apiRoot	string	See clause 7.5
apiVersion	string	See clause 8.1.1

8.1.2.2.3 Resource Standard Methods

8.1.2.2.3.1 POST

This method shall support the URI query parameters specified in table 8.1.2.2.3.1-1.

Table 8.1.2.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 8.1.2.2.3.1-2 and the response data structures and response codes specified in table 8.1.2.2.3.1-3.

Table 8.1.2.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
ASRegistration	M	1	AS registration request information.

Table 8.1.2.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
ASRegistrationAck	M	1	201 Created	AS information is registered successfully at MSGin5G Server. The URI of the created resource shall be returned in the "Location" HTTP header.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 8.1.2.2.3.1-4: Headers supported by the POST method on this resource

Name	Data type	P	Cardinality	Description
n/a				

Table 8.1.2.2.3.1-5: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	String	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/msgs-asregistration/<apiVersion>/registrations/{registrationId}

Table 8.1.2.2.3.1-6: Links supported by the 200 Response Code on this endpoint

Name	Resource name	HTTP method or custom operation	Link parameter(s)	Description
n/a				

8.1.2.3 Resource: AS DeRegistration

8.1.2.3.1 Description

This resource represents all the Application Servers that are deregistered at a given MSGin5G Server.

8.1.2.3.2 Resource Definition

Resource URI: {apiRoot}/msgs-asregistration/<apiVersion>/registrations/{registrationId}

This resource shall support the resource URI variables defined in the table 8.1.2.3.2-1.

Table 8.1.2.3.2-1: Resource URI variables for this resource

Name	Data Type	Definition
apiRoot	string	See clause 7.5
apiVersion	string	See clause 8.1.1
registrationId	string	The AS registration resource id

8.1.2.3.3 Resource Standard Methods

8.1.2.3.3.1 DELETE

This method deregisters an AS registration from the MSGin5G Server. This method shall support the URI query parameters specified in the table 8.1.2.3.3.1-1.

Table 8.1.2.3.3.1-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 8.1.2.3.3.1-2 and the response data structures and response codes specified in table 8.1.2.3.3.1-3.

Table 8.1.2.3.3.1-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 8.1.2.3.3.1-3: Data structures supported by the DELETE Response Body on this resource

Data type	P	Cardinality	Response codes	Description
ASRegistrationAck	M	1	200 OK	The AS DeRegistration information matching the registrationId is deleted.
n/a			204 No Content	Successful response. The individual AS registration matching the registrationId is successfully deleted.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
NOTE: The mandatory HTTP error status codes for the HTTP POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 8.1.2.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

Table 8.1.2.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

8.1.3 Custom Operations without associated resources

None.

8.1.4 Notifications

None.

8.1.5 Data Model

8.1.5.1 General

This clause specifies the application data model supported by the API. Data types listed in clause 7.2 apply to this API. Table 8.1.5.1-1 specifies the data types defined specifically for the MSGS_ASRegistration API service.

Table 8.1.5.1-1: MSGS_ASRegistration API specific Data Types

Data type	Section defined	Description	Applicability
ASRegistration	8.1.5.2.2	The AS registration request information.	
ASRegistrationAck	8.1.5.2.3	The AS registration response information.	
ASProfile	8.1.5.2.4	The profile information related to the AS in the ASRegistration data type.	

Table 8.1.5.1-2 specifies data types re-used by the MSGS_ASRegistration API service.

Table 8.1.5.1-2: Re-used Data Types

Data type	Reference	Comments	Applicability
ProblemDetails	3GPP TS 29.571 [5]		
Uri	3GPP TS 29.571 [5]		

8.1.5.2 Structured data types

8.1.5.2.1 Introduction

8.1.5.2.2 Type: ASRegistration

Table 8.1.5.2.2-1: Definition of type ASRegistration

Attribute name	Data type	P	Cardinality	Description	Applicability
asSvcId	string	M	1	The MSGin5G identifier of the Application Server.	
appld	string	O	0..1	The identifier of the application specified by the application provider	
targetUri	Uri	O	0..1	The URL for receiving message, message delivery status report, etc. The MSGin5G Server uses this URL to interact to AS.	
reqExprTime	DateTime	O	0..1	The requested expiration time for the registration.	
exGroupList	array(string)	O	1..N	The list of group service id of MSGin5G groups which the Application Server will control.	
asProf	ASProfile	O	0..1	The profile information of the AS.	

8.1.5.2.3 Type: ASRegistrationAck

Table 8.1.5.2.3-1: Definition of type ASRegistrationAck

Attribute name	Data type	P	Cardinality	Description	Applicability
asSvcId	string	M	1	The MSGin5G identifier of the Application Server.	
result	ProblemDetails	M	1	The result of the registration.	
regExprTime	DateTime	O	0..1	The expiration time of the registration.	

8.1.5.2.4 Type: ASProfile

Table 8.1.5.2.4-1: Definition of type ASProfile

Attribute name	Data type	P	Cardinality	Description	Applicability
appName	string	O	1	The name of the Application Server	
appProviders	array(string)	O	1..N	The provider of the Application Server	
appSenarios	array(string)	O	1..N	The application scenario description.	
appCategory	string	O	0..1	The category or type of Application Server.	
asStatus	string	O	0..1	AS status (e.g. Enabled, Disabled etc.)	

8.1.5.3 Simple data types and enumerations

None.

8.1.6 Error Handling

8.1.6.1 General

HTTP error handling shall be supported as specified in clause 7.7.

In addition, the requirements in the following clauses shall apply.

8.1.6.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MSGS_ASRegistration API.

8.1.6.3 Application Errors

The application errors defined for the MSGS_ASRegistration API are listed in table 8.1.6.3-1.

Table 8.1.6.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

8.1.7 Feature negotiation

General feature negotiation procedures are defined in clause 7.8. Table 8.1.7-1 lists the supported features for MSGS_ASRegistration API.

Table 8.1.7-1: Supported Features

Feature number	Feature Name	Description

8.2 MSGS_MSGDelivery API

8.2.1 API URI

The MSGS_MSGDelivery service shall use the MSGS_MSGDelivery API, The MSGS_MSGDelivery API corresponding to Mm5s APIs as defined in in 3GPP TS 23.554 [2].

The request URIs used in HTTP requests from the Message Gateway (on behalf of Legacy 3GPP UE or Non-3GPP UE) or the Application Server towards the MSGin5G Server shall have the Resource URI structure as defined in clause 7.5 with the following clarifications:

- The <apiName> shall be "msgsg-msgdelivery".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 8.2.2.

8.2.2 Resources

None.

8.2.3 Custom Operations without associated resources

8.2.3.1 Overview

The structure of the custom operation URIs of the MSGS_MSGDelivery service is shown in Figure 8.2.3.1-1.

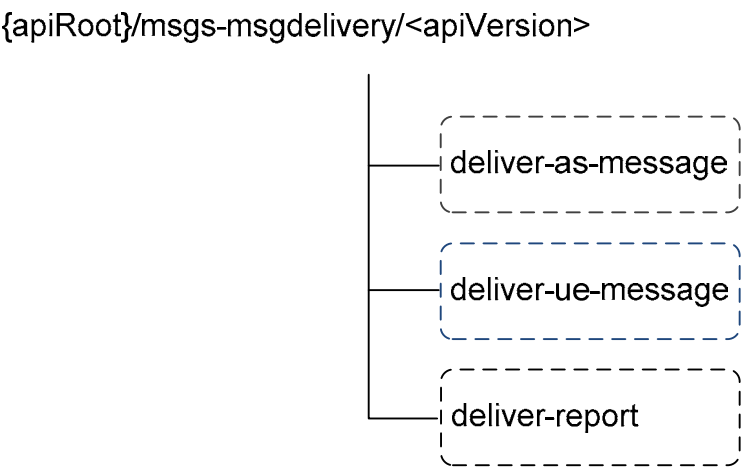


Figure 8.2.3.1-1: Custom operation URI structure of the MSGS_MSGDelivery API

Table 8.2.3.1-1 provides an overview of the custom operations and applicable HTTP methods.

Table 8.2.3.1-1: Custom operations without associated resources

Custom operation URI	Mapped HTTP method	Description
{apiRoot}/msgsg-msgdelivery/<apiVersion>/deliver-as-message	POST	Request of AS to deliver message to a given MSGin5G Server.
{apiRoot}/msgsg-msgdelivery/<apiVersion>/deliver-ue-message	POST	Request of Message Gateway (on behalf of Legacy 3GPP UE or Non-3GPP UE) to deliver message to a given MSGin5G Server.
{apiRoot}/msgsg-msgdelivery/<apiVersion>/deliver-report	POST	Request of Message Gateway (on behalf of Legacy 3GPP UE or Non-3GPP UE) to deliver status report to a given MSGin5G Server.

8.2.3.2 Operation: deliver-as-message

8.2.3.2.1 Description

This operation is used by the Application Server to deliver message to a given MSGin5G Server.

8.2.3.2.2 Operation Definition

This operation shall support the response data structures and response codes specified in Table 8.2.3.2.2-1 and Table 8.2.3.2.2-2.

Table 8.2.3.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
ASMessageDelivery	M	1	Represents the data to be used for AS to deliver message.

Table 8.2.3.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MessageDeliveryAck	M	1	200 OK	AS Message is delivered successfully.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
NOTE: The mandatory HTTP error status codes for the HTTP POST method listed in Table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 8.2.3.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

Table 8.2.3.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

8.2.3.3 Operation: deliver-ue-message

8.2.3.3.1 Description

This operation is used by the Message Gateway (on behalf of Legacy 3GPP UE or Non-3GPP UE) to deliver message to a given MSGin5G Server.

8.2.3.3.2 Operation Definition

This operation shall support the response data structures and response codes specified in Table 8.2.3.3.2-1 and Table 8.2.3.3.2-2.

Table 8.2.3.3.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
UEMessageDelivery	M	1	Represents the data to be used for Message Gateway (on behalf of Legacy 3GPP UE or Non-3GPP UE) to deliver message.

Table 8.2.3.3.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MessageDeliveryAck	M	1	200 OK	UE Message is delivered successfully.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
NOTE: The mandatory HTTP error status codes for the HTTP POST method listed in Table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 8.2.3.3.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

Table 8.2.3.3.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

8.2.3.4 Operation: deliver-report

8.2.3.4.1 Description

This operation is used by the Message Gateway (on behalf of Legacy 3GPP UE or Non-3GPP UE) or the Application Server to deliver status report to a given MSGin5G Server.

8.2.3.4.2 Operation Definition

This operation shall support the response data structures and response codes specified in Table 8.2.3.4.2-1 and Table 8.2.3.4.2-2.

Table 8.2.3.4.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
DeliveryStatusReport	M	1	Represents the data to be used for Message Gateway (on behalf of Legacy 3GPP UE or Non-3GPP UE) or the Application Server to deliver status report.

Table 8.2.3.4.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
MessageDeliveryAck	M	1	200 OK	The status report is delivered successfully.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
NOTE: The mandatory HTTP error status codes for the HTTP POST method listed in Table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 8.2.3.4.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

Table 8.2.3.4.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

8.2.4 Notifications

None.

8.2.5 Data Model

8.2.5.1 General

This clause specifies the application data model supported by the API. Data types listed in clause 7.2 apply to this API. Table 8.2.5.1-1 specifies the data types defined specifically for the MSGS_MSGDelivery API service.

Table 8.2.5.1-1: API specific Data Types

Data type	Section defined	Description	Applicability
ASMessageDelivery	8.2.5.2.2	The AS message delivery request information.	
DeliveryStatus	8.2.5.3.3	Indicates if delivery is a failure, or if the message is stored for deferred delivery.	
DeliveryStatusReport	8.2.5.2.7	The message delivery status report request information.	
MessageDeliveryAck	8.2.5.2.4	The message delivery response information.	
MessageSegmentParameters	8.2.5.2.5	Contains the message segment information of the message.	
Priority	8.2.5.3.5	Application priority level requested for this message.	
ReportDeliveryStatus	8.2.5.3.4	The delivery status description, including success or failure in delivery.	
StoreAndForwardParameters	8.2.5.2.6	Contains the store forward information of the message.	
UEMessageDelivery	8.2.5.2.3	The UE message delivery request information.	

Table 8.2.5.1-2 specifies data types re-used by the MSGS_MSGDelivery API service.

Table 8.2.5.1-2: Re-used Data Types

Data type	Reference	Comments	Applicability
Address	9.1.5.2.3	The data type of the oriAddr and destAddr.	
DateTime	3GPP TS 29.571 [5]	String with format "date-time" as defined in OpenAPI Specification [6].	

8.2.5.2 Structured data types

8.2.5.2.1 Introduction

8.2.5.2.2 Type: ASMessageDelivery

Table 8.2.5.2.2-1: Definition of type ASMessageDelivery

Attribute name	Data type	P	Cardinality	Description	Applicability
oriAddr	Address	M	1	The service identity of the sending Application Server (NOTE).	
destAddr	Address	M	1	The service identity of the receiving Legacy 3GPP UE, Non-3GPP UE or MSGin5G UE. The service identifier of the target MSGin5G Group. The service identifier of the Broadcast Service Area where the message needs to be broadcast. Indicates which Messaging Topic this message is related to.	
appld	string	O	0..1	Identifies the application(s) for which the content is intended. This list of Application IDs attribute is required when the message is sent to one or multiple Application Clients served by same MSGin5G Client.	
msgId	string	M	1	Unique identifier of this message.	
delivStReqInd	boolean	O	0..1	Indicates if delivery acknowledgement from the recipient is requested. Set to "true" if delivery acknowledgement from the recipient is requested. otherwise set to "false". Default value is "false".	
payload	string	O	0..1	Payload of the message.	
priority	Priority	O	0..1	Application priority level requested for this message.	
segInd	boolean	O	0..1	Indicates this message is part of a segmented message. Set to "true" if the message is part of a segmented message. otherwise set to "false". Default value is "false".	
segParams	MessageSegmentParameters	C	0..1	The message segment parameters. This attribute shall be included only if the value of the message Segment Flag attribute indicates that message Segment services are requested.	
stoAndFwInd	boolean	M	1	An indicator of whether store and forward services are requested for this message. Set to "true" if it is required to store and forward services for this message. otherwise set to "false".	
stoAndFwParams	StoreAndForwardParameters	C	0..1	Parameters used by MSGin5G Server for providing store and forward services. This attribute shall be included only if the value of the Store and forward flag attribute indicates that store and forward services are requested.	
latency	integer	O	0..1	The latency requirement for the message which only applies to AS Originating MSGin5G Message. Unit: millisecond.	
notiUrl	string	O	0..1	The URL for MSGin5G Server to send the MSGin5G response notification	
NOTE: Only "AS" is applicable to the addrType attribute in the Address data type to represent the originating type of message request.					

8.2.5.2.3 Type:UEMessageDelivery

Table 8.2.5.2.3-1: Definition of type UEMessageDelivery

Attribute name	Data type	P	Cardinality	Description	Applicability
oriAddr	Address	M	1	The service identity of the sending Legacy 3GPP UE or Non-3GPP UE (NOTE).	
destAddr	Address	M	1	The service identity of the receiving Application Server or MSGin5G UE.	
appld	string	O	0..1	Identifies the application(s) for which the content is intended. This list of Application IDs attribute is required when the message is sent to one or multiple Application Clients served by same MSGin5G Client.	
msgld	string	M	1	Unique identifier of this message.	
delivStReqInd	boolean	O	0..1	Indicates if delivery acknowledgement from the recipient is requested. Set to "true" if delivery acknowledgement from the recipient is requested. otherwise set to "false". Default value is "false".	
payload	string	O	0..1	Payload of the message.	
segInd	boolean	O	0..1	Indicates this message is part of a segmented message. Set to "true" if the message is part of a segmented message. otherwise set to "false". Default value is "false".	
segParams	MessageSegmentParameters	C	0..1	The message segment parameters. This attribute shall be included only if the value of the message Segment Flag attribute indicates that message Segment services are requested.	
stoAndFwInd	boolean	M	1	An indicator of whether store and forward services are requested for this message. Set to "true" if it is required to store and forward services for this message. otherwise set to "false".	
stoAndFwParams	StoreAndForwardParameters	C	0..1	Parameters used by MSGin5G Server for providing store and forward services. This attribute shall be included only if the value of the Store and forward flag attribute indicates that store and forward services are requested.	
NOTE: Only "UE" is applicable to the addrType attribute in the Address data type to represent the originating type of message request.					

8.2.5.2.4 Type: MessageDeliveryAck

Table 8.2.5.2.4-1: Definition of type MessageDeliveryAck

Attribute name	Data type	P	Cardinality	Description	Applicability
oriAddr	Address	M	1	The service identity of the sending Legacy 3GPP UE, Non-3GPP UE or the sending Application Server (NOTE).	
msgld	string	M	1	Unique identifier of this message.	
status	DeliveryStatus	O	0..1	Indicates if delivery is a failure, or if the message is stored for deferred delivery.	
failureCause	string	C	0..1	The reason for failure. May only be present if the "status" attribute is set to "DELY_FAILED".	
NOTE: Either "UE" or "AS" shall be included in the "addrType" attribute within the Address data type to represent the originating type of message request.					

8.2.5.2.5 Type:MessageSegmentParameters

Table 8.2.5.2.5-1: Definition of type MessageSegmentParameters

Attribute name	Data type	P	Cardinality	Description	Applicability
segId	string	O	0..1	All segmented messages associated within the same set of segmented messages (i.e. associated with the same MSGin5G message) are assigned the same unique identifier.	
totalSegCount	integer	O	0..1	Indicates the total number of segments for the message.	
segNumb	integer	O	0..1	Indicates segmented message number of each segmented message within a set of segmented messages.	
lastSegFlag	boolean	O	0..1	An indicator of whether this segmented message is the last segment in the set of segmented messages or not. Set to "true" if the segmented message is the last segment in the set of segmented messages. otherwise set to "false". Default value is "false".	

8.2.5.2.6 Type:StoreAndForwardParameters

Table 8.2.5.2.6-1: Definition of type StoreAndForwardParameters

Attribute name	Data type	P	Cardinality	Description	Applicability
exprTime	DateTime	O	0..1	Indicates message expiration time.	

8.2.5.2.7 Type:DeliveryStatusReport

Table 8.2.5.2.7-1: Definition of type DeliveryStatusReport

Attribute name	Data type	P	Cardinality	Description	Applicability
oriAddr	Address	M	1	The service identity of the sending Legacy 3GPP UE, Non-3GPP UE or the sending Application Server (NOTE).	
destAddr	Address	M	1	The service identity of the receiving Legacy 3GPP UE, Non-3GPP UE or the receiving Application Server (NOTE).	
msgId	string	M	1	Unique identifier of this message.	
failureCause	string	C	0..1	The Failure Cause indicates the failure reason, if applicable. May only be present if the ReportDeliveryStatus sets to "REPT_DELY_FAILED".	
delivSt	ReportDeliveryStatus	M	1	The delivery status description, including success or failure in delivery.	
NOTE: Either "UE" or "AS" shall be included in the addrType attribute in Address data type to represent the originating type of message request.					

8.2.5.3 Simple data types and enumerations

8.2.5.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

8.2.5.3.2 Simple data types

None.

8.2.5.3.3 Enumeration: DeliveryStatus

Table 8.2.5.3.3-1: Enumeration DeliveryStatus

Enumeration value	Description	Applicability
DELY_FAILED	Indicates that the message delivery is failed.	
DELY_STORED	Indicates that the message is stored for deferred delivery.	

8.2.5.3.4 Enumeration: ReportDeliveryStatus

Table 8.2.5.3.4-1: Enumeration ReportDeliveryStatus

Enumeration value	Description	Applicability
REPT_DELY_SUCCESS	Indicates that the report delivery is successful.	
REPT_DELY_FAILED	Indicates that the report delivery is failed.	

8.2.5.3.5 Enumeration: Priority

Table 8.2.5.3.5-1: Enumeration Priority

Enumeration value	Description	Applicability
HIGH	Indicates the messages should be sent in high priority.	
MIDDLE	Indicates the messages should be sent in middle priority.	
LOW	Indicates the messages should be sent in low priority.	

8.2.6 Error Handling

8.2.6.1 General

HTTP error handling shall be supported as specified in clause 7.7.

In addition, the requirements in the following clauses shall apply.

8.2.6.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MSGS_MSGDelivery API.

8.2.6.3 Application Errors

The application errors defined for the MSGS_MSGDelivery API are listed in table 8.2.6.3-1.

Table 8.2.6.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

8.2.7 Feature negotiation

General feature negotiation procedures are defined in clause 7.8. Table 8.2.7-1 lists the supported features for MSGS_MSGDelivery API.

Table 8.2.7-1: Supported Features

Feature number	Feature Name	Description

8.3 MSGS_TopiclistEvent API

8.3.1 API URI

The MSGS_TopiclistEvent service shall use the MSGS_TopiclistEvent API.

The request URIs used in HTTP requests from the MSGin5G Server 1 towards the MSGin5G Server 2 shall have the Resource URI structure as defined in clause 7.5 with the following clarifications:

- The <apiName> shall be "msgsg-topiclistevent".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 8.3.2.

8.3.2 Resources

8.3.2.1 Overview

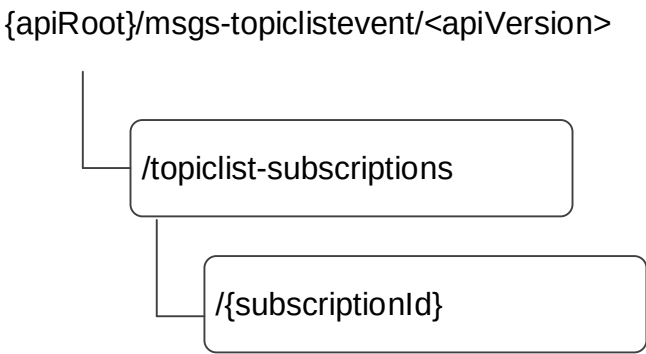


Figure 8.3.2.1-1: Resource URI structure of the MSGS_TopiclistEvent API

Table 8.3.2.1-1 provides an overview of the resources and applicable HTTP methods.

Table 8.3.2.1-1: Resources and methods overview

Resource name	Resource URI	HTTP method or custom operation	Description
Topic List Subscriptions	/topiclist-subscriptions	POST	Subscribe to a Messaging Topic list on a MSGin5G Server.
Individual Topic List Subscription	/topiclist-subscriptions/{subscriptionId}	DELETE	Delete an existing "Individual Topic List Subscription" resource.

8.3.2.2 Resource: Topic List Subscriptions

8.3.2.2.1 Description

This resource represents all the MSGin5G Servers that are subscribed at a given Messaging Topic list on a MSGin5G Server.

8.3.2.2.2 Resource Definition

Resource URI: {apiRoot}/msgs-topiclistevent/<apiVersion>/topiclist-subscriptions

This resource shall support the resource URI variables defined in the table 8.3.2.2.2-1.

Table 8.3.2.2.2-1: Resource URI variables for this resource

Name	Data Type	Definition
apiRoot	string	See clause 7.5
apiVersion	string	See clause 8.3.1

8.3.2.2.3 Resource Standard Methods

8.3.2.2.3.1 POST

This method shall support the URI query parameters specified in table 8.3.2.2.3.1-1.

Table 8.3.2.2.3.1-1: URI query parameters supported by the POST method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 8.3.2.2.3.1-2 and the response data structures and response codes specified in table 8.3.2.2.3.1-3.

Table 8.3.2.2.3.1-2: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
TopicListSubscription	M	1	Messaging Topic list subscription request information.

Table 8.3.2.2.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
TopicListSubscription	M	1	201 Created	Successful case. The creation of an Messaging Topic list subscription resource is confirmed, and the representation of the created "Individual Topic List Subscription" resource is returned in the response body. The URI of the created resource shall be returned in the "Location" HTTP header.
NOTE: The mandatory HTTP error status codes for the POST method listed in table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 8.3.2.2.3.1-4: Headers supported by the POST method on this resource

Name	Data type	P	Cardinality	Description
n/a				

Table 8.3.2.2.3.1-5: Headers supported by the 201 response code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains the URI of the newly created resource, according to the structure: {apiRoot}/msgs-topiclistevent/<apiVersion>/topiclist-subscriptions/{subscriptionId}

8.3.2.3 Resource: Individual Topic List Subscription

8.3.2.3.1 Description

The Individual Topic List Subscription resource represents single Messaging Topic list subscription at a given MSGin5G Server. The resource allows an MSGin5G Server to delete Individual Topic List Subscription resource.

8.3.2.3.2 Resource Definition

Resource URI: {apiRoot}/msgs-topiclistevent/<apiVersion>/topiclist-subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in the table 8.3.2.3.2-1.

Table 8.3.2.3.2-1: Resource URI variables for this resource

Name	Data Type	Definition
apiRoot	string	See clause 7.5
apiVersion	string	See clause 8.3.1
subscriptionId	string	The MSGin5G Server Messaging Topic list subscription resource id

8.3.2.3.3 Resource Standard Methods

8.3.2.3.3.1 DELETE

This method shall support the URI query parameters specified in table 8.3.2.3.3.1-1.

Table 8.3.2.3.3.1-1: URI query parameters supported by the DELETE method on this resource

Name	Data type	P	Cardinality	Description
n/a				

This method shall support the request data structures specified in table 8.3.2.3.3.1-2 and the response data structures and response codes specified in table 8.3.2.3.3.1-3.

Table 8.3.2.3.3.1-2: Data structures supported by the DELETE Request Body on this resource

Data type	P	Cardinality	Description
n/a			

Table 8.3.2.3.3.1-3: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful response. The "Individual Topic List Subscription" resource is successfully deleted.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
NOTE: The mandatory HTTP error status codes for the DELETE method listed in table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 8.3.2.3.3.1-4: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

Table 8.3.2.3.3.1-5: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

8.3.3 Custom Operations without associated resources

8.3.3.1 Overview

The structure of the custom operation URIs of the MSGS_MSGTopiclistEvent service is shown in Figure 8.3.3.1-1.

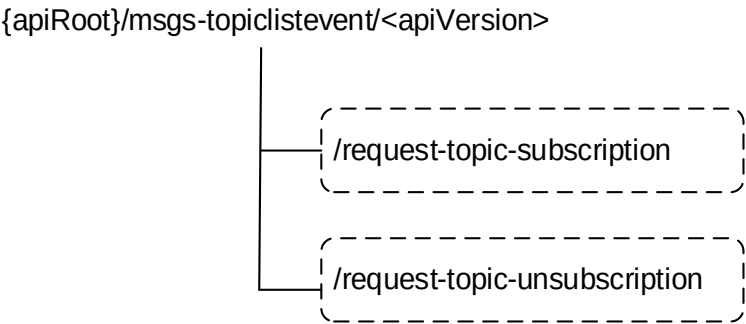


Figure 8.3.3.1-1: Custom operation URI structure of the MSGS_TopiclistEvent API

Table 8.3.3.1-1 provides an overview of the custom operations and applicable HTTP methods.

Table 8.3.3.1-1: Custom operations without associated resources

Custom operation URI	Mapped HTTP method	Description
{apiRoot}/msgs-topiclistevent/<apiVersion>/request-topic-subscription	POST	Request of MSGin5G Server to deliver Messaging Topic subscription to another given MSGin5G Server.
{apiRoot}/msgs-topiclistevent/<apiVersion>/request-topic-unsubscription	POST	Request of MSGin5G Server to deliver Messaging Topic unsubscription to another given MSGin5G Server.

8.3.3.2 Operation: request-topic-subscription

8.3.3.2.1 Description

The operation is used by the MSGin5G Server to request the other MSGin5G Server to create a subscription for one or more Messaging Topic(s).

8.3.3.2.2 Operation Definition

This operation shall support the request data structures shown in Table 8.3.3.2.2-1 and the response data structures and error codes specified in Tables 8.3.3.2.2-2.

Table 8.3.3.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
TopicSubscription	M	1	Information about the Messaging Topic subscription that the MSGin5G Server shall create.

Table 8.3.3.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
TopicSubscription Ack	M	1	200 OK	Successful request to trigger the creation of a subscription for Messaging Topic at the MSGin5G Server.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
NOTE: The mandatory HTTP error status codes for the HTTP POST method listed in Table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 8.3.3.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

Table 8.3.3.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

8.3.3.3 Operation: request-topic-unsubscription

8.3.3.3.1 Description

The operation is used by the MSGin5G Server to request the other MSGin5G Server to remove a subscription for one or more Messaging Topic(s).

8.3.3.3.2 Operation Definition

This operation shall support the request data structures shown in Table 8.3.3.3.2-1 and the response data structures and error codes specified in Tables 8.3.3.3.2-2.

Table 8.3.3.3.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
TopicUnsubscription	M	1	Reference used to identify the Messaging Topic subscription that the MSGin5G Server shall remove.

Table 8.3.3.3.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	Successful request to trigger the removal of a subscription for Messaging Topic(s) on the MSGin5G Server.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Server. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
NOTE: The mandatory HTTP error status codes for the HTTP POST method listed in Table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 8.3.3.3.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

Table 8.3.3.3.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Server.

8.3.4 Notifications

Notifications shall comply to clause 5.2.5 of 3GPP TS 29.122 [24].

Table 8.3.4.1-1: Notifications overview

Notification	Callback URI	HTTP method or custom operation	Description (service operation)
TopicList Notification	{notificationURI}	POST	Notify about Messaging Topic list changes from MSGin5G Server.

8.3.4.2 Topiclist Notification

8.3.4.2.1 Description

The Topiclist Notification is used by the MSGin5G Server to notify Messaging Topic list change events to another MSGin5G Server that has subscribed to such Messaging Topic list.

8.3.4.2.2 Target URI

The Callback URI "{**notificationURI**}" shall be used with the callback URI variables defined in table 8.3.4.2.2-1.

Table 8.3.4.2.2-1: Callback URI variables

Name	Definition
notificationURI	String formatted as URI with the Callback Uri

8.3.4.2.3 Standard Methods

8.3.4.2.3.1 POST

This method shall support the request data structures specified in table 8.3.4.2.3.1-1 and the response data structures and response codes specified in table 8.3.4.2.3.1-2.

Table 8.3.4.2.3.1-1: Data structures supported by the POST Request Body

Data type	P	Cardinality	Description
TopicListNotification	M	1	Provides information about subscribed Messaging Topic list.

Table 8.3.4.2.3.1-2: Data structures supported by the POST Response Body

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The receipt of the Notification is acknowledged.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI representing the end point of an alternative service consumer towards which the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI representing the end point of an alternative service consumer towards which the notification should be sent. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
NOTE: The mandatory HTTP error status codes for the HTTP POST method listed in Table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 8.3.4.2.3.1-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI representing the end point of an alternative service consumer towards which the notification should be redirected.

Table 8.3.4.2.3.1-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI representing the end point of an alternative service consumer towards which the notification should be redirected.

8.3.5 Data Model

8.3.5.1 General

This clause specifies the application data model supported by the API. Data types listed in clause 7.2 apply to this API. Table 8.3.5.1-1 specifies the data types defined specifically for the MSGS_TopiclistEvent API service.

Table 8.3.5.1-1: TopiclistEvent API specific Data Types

Data type	Section defined	Description	Applicability
TopicListSubscription	8.3.5.2.2	The Messaging Topic list subscription request information.	
TopicListUnsubscriptionAck	8.3.5.2.5	The Messaging Topic list unsubscription response information, indicating the subscription result.	
TopicSubscription	8.3.5.2.6	The Messaging Topic subscription request information.	
TopicSubscriptionAck	8.3.5.2.7	The Messaging Topic subscription response information.	
TopicUnsubscription	8.3.5.2.8	The Messaging Topic list unsubscription request information.	
TopicListNotification	8.3.5.2.9	The Messaging Topic list notification information, indicating changed Messaging Topics.	
MessagingTopic	8.3.5.2.10	The individual Messaging Topic information	

Table 8.3.5.1-2 specifies data types re-used by the MSGS_TopiclistEvent API service.

Table 8.3.5.1-2: Re-used Data Types

Data type	Reference	Comments	Applicability
Uri	3GPP TS 29.571 [5]		
SupportedFeatures	3GPP TS 29.571 [5]	Used to negotiate the optional features defined in table 8.3.7-1.	

8.3.5.2 Structured data types

8.3.5.2.1 Introduction

8.3.5.2.2 Type: TopicListSubscription

Table 8.3.5.2.2-1: Definition of type TopicListSubscription

Attribute name	Data type	P	Cardinality	Description	Applicability
oriAddr	Address	M	1	The service identity of the MSGin5G Server which requests the Messaging Topic list subscription.	
destAddr	Address	M	1	The service identity of the receiving MSGin5G Server.	
notificationURI	Uri	M	1	Notification target address.	
exprTime	DateTime	O	0..1	Contains the expiration time of this subscription.	
suppFeat	Supported Features	C	0..1	This IE represents a list of Supported features as described in clause 8.3.7. It shall be present if at least one feature defined in clause 8.3.7 is supported.	

8.3.5.2.3 Void

8.3.5.2.4 Void

8.3.5.2.5 Type: TopicListUnsubscriptionAck

Table 8.3.5.2.5-1: Definition of type TopicListSubscriptionAck

Attribute name	Data type	P	Cardinality	Description	Applicability
subStat	string	M	1	The result of the subscription.	

8.3.5.2.6 Type: TopicSubscription

Table 8.3.5.2.6-1: Definition of type TopicSubscription

Attribute name	Data type	P	Cardinality	Description	Applicability
oriAddr	string	M	1	The Service identifier of the originating MSGin5G Client or Application Server, or MSGin5G Server	
msgTopics	array(string)	M	1..N	Information of Messaging Topic(s) to be subscribed	
exprTime	DateTime	O	0..1	The expiration time of this subscription requested, and should be larger than 0 if included. If not included, the expiration time subjects to operator policy.	

8.3.5.2.7 Type: TopicSubscriptionAck

Table 8.3.5.2.7-1: Definition of type TopicSubscriptionAck

Attribute name	Data type	P	Cardinality	Description	Applicability
subStat	string	M	1	Indicating update status of the Messaging Topic if newly created or deleted.	
exprTime	DateTime	O	0..1	The expiration time of this subscription set by MSGin5G Server.	

8.3.5.2.8 Type: TopicUnsubscription

Table 8.3.5.2.8-1: Definition of type TopicUnsubscription

Attribute name	Data type	P	Cardinality	Description	Applicability
oriAddr	string	M	0..1	The Service identifier of the originating MSGin5G Client or Application Server, or MSGin5G Server.	
msgTopics	array(string)	M	1..N	Information of Messaging Topic(s) to be unsubscribed.	

8.3.5.2.9 Type: TopicListNotification

Table 8.3.5.2.9-1: Definition of type TopicListNotification

Attribute name	Data type	P	Cardinality	Description	Applicability
exprTime	DateTime	O	0..1	The expiration time of this subscription set by MSGin5G Server.	
msgTopics	array(MessagingTopic)	M	1..N	List of Messaging Topic(s) information notified by MSGin5G Server.	

8.3.5.2.10 Type: MessagingTopic

Table 8.3.5.2.10-1: Definition of type MessagingTopic

Attribute name	Data type	P	Cardinality	Description	Applicability
msgTopic	string	M	1	The identifier of the Messaging Topic.	
updateStat	UpdateStatus	M	1	Indicating update status of the Messaging Topic if newly created or deleted.	

8.3.5.3 Simple data types and enumerations

8.3.5.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

8.3.5.3.2 Enumeration: UpdateStatus

Table 8.3.5.3.2-1: Enumeration UpdateStatus

Enumeration value	Description	Applicability
CREATED	The Messaging Topic is newly created.	
DELETED	The Messaging Topic is newly deleted.	

8.3.6 Error Handling

8.3.6.1 General

HTTP error handling shall be supported as specified in clause 7.7.

In addition, the requirements in the following clauses shall apply.

8.3.6.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MSGS_TopiclistEvent API.

8.3.6.3 Application Errors

The application errors defined for the MSGS_TopiclistEvent API are listed in table 8.3.6.3-1.

Table 8.3.6.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

8.3.7 Feature negotiation

General feature negotiation procedures are defined in clause 7.8. Table 8.3.7-1 lists the supported features for MSGS_TopiclistEvent API.

Table 8.3.7-1: Supported Features

Feature number	Feature Name	Description

9 Message Gateway API definition

9.1 MSGG_L3GDelivery API

9.1.1 API URI

The MSGG_L3GDelivery service shall use the MSGG_L3GDelivery API, The MSGG_L3GDelivery API corresponding to Ml3g APIs as defined in in 3GPP TS 23.554 [2].

The request URIs used in HTTP requests from the MSGin5G Server towards the Legacy 3GPP Message Gateway shall have the Resource URI structure as defined in clause 7.5 with the following clarifications:

- The <apiName> shall be "msgg-l3gdelivery".

- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 9.1.3.

9.1.2Resources

None.

9.1.3Custom Operations without associated resources

9.1.3.1Overview

The structure of the custom operation URIs of the MSGG_L3GDelivery service is shown in Figure 9.1.3.1-1.

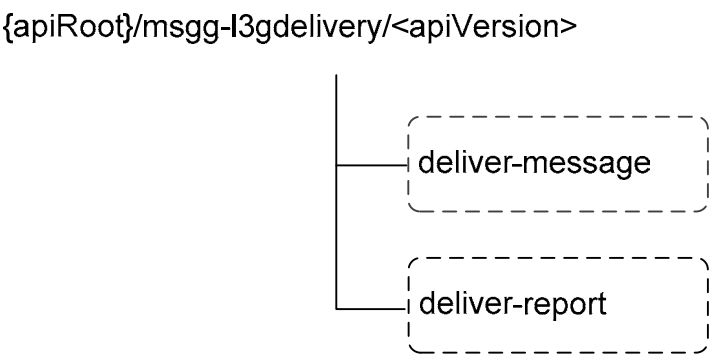


Figure 9.1.3.1-1: Custom operation URI structure of the MSGG_L3GDelivery API

Table 9.1.3.1-1 provides an overview of the custom operations and applicable HTTP methods.

Table 9.1.3.1-1: Custom operations without associated resources

Custom operation URI	Mapped HTTP method	Description
{apiRoot}/msgg-l3gdelivery/<apiVersion>/deliver-message	POST	Request of MSGin5G Server to deliver message to a given Legacy 3GPP Message Gateway.
{apiRoot}/msgg-l3gdelivery/<apiVersion>/deliver-report	POST	Request of MSGin5G Server to deliver status report to a given Legacy 3GPP Message Gateway.

9.1.3.2Operation: deliver-message

9.1.3.2.1Description

This operation is used by the MSGin5G Server to deliver message to a given Legacy 3GPP Message Gateway.

9.1.3.2.2Operation Definition

This operation shall support the response data structures and response codes specified in table 9.1.3.2.2-1 and table 9.1.3.2.2-2.

Table 9.1.3.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
L3gMessageDelivery	M	1	Represents the data to be used for MSGin5G Server to deliver message.

Table 9.1.3.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The Message is Delivered successfully.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Message Gateway. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Message Gateway. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
NOTE: The mandatory HTTP error status codes for the HTTP POST method listed in Table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 9.1.3.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Message Gateway.

Table 9.1.3.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Message Gateway.

9.1.3.3 Operation: deliver-report

9.1.3.3.1 Description

This operation is used by the MSGin5G Server to deliver status report to a given Legacy 3GPP Message Gateway.

9.1.3.3.2 Operation Definition

This operation shall support the response data structures and response codes specified in Table 9.1.3.3.2-1 and Table 9.1.3.3.2-2.

Table 9.1.3.3.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
DeliveryStatusReport	M	1	Represents the data to be used for MSGin5G Server to deliver status report.

Table 9.1.3.3.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The status report is Delivered successfully.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Message Gateway. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Message Gateway. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
NOTE: The mandatory HTTP error status codes for the HTTP POST method listed in Table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 9.1.3.3.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Message Gateway.

Table 9.1.3.3.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Message Gateway.

9.1.4 Notifications

None.

9.1.5 Data Model

9.1.5.1 General

This clause specifies the application data model supported by the API. Data types listed in clause 7.2 apply to this API. Table 9.1.5.1-1 specifies the data types defined specifically for the MSGG_L3GDelivery API service.

Table 9.1.5.1-1: MSGG_L3GDelivery API specific Data Types

Data type	Section defined	Description	Applicability
L3gMessageDelivery	9.1.5.2.2	Information within message delivery request.	

Table 9.1.5.1-2 specifies data types re-used by the MSGG_L3GDelivery API service.

Table 9.1.5.1-2: Re-used Data Types

Data type	Reference	Comments	Applicability
DeliveryStatusReport	8.2.5.2.7	The message delivery status report request information.	
MessageSegmentParameters	8.2.5.2.5	Contains the message segment information of the message.	

9.1.5.2 Structured data types

9.1.5.2.1 Introduction

9.1.5.2.2 Type: L3gMessageDelivery

Table 9.1.5.2.2-1: Definition of type L3gMessageDelivery

Attribute name	Data type	P	Cardinality	Description	Applicability
oriAddr	Address	M	1	The service identity of the originating MSGin5G Client or the originating Application Server. This attribute is copied from the associated inbound message (NOTE).	
destAddr	Address	M	1	The service identity of the receiving entity. The receiving entity can only be Legacy 3GPP UE Service ID in MSGG_L3GDelivery API.	
appld	string	O	0..1	Identifies the application(s) for which the content is intended. This list of Application IDs attribute is required when the message is sent to one or multiple Application Clients served by same MSGin5G Client.	
msgld	string	M	1	Unique identifier of this message. This attribute is copied from the associated inbound message request	
delivStReqInd	boolean	O	0..1	Indicates if delivery acknowledgement from the recipient is requested. This attribute is copied from the associated inbound message. Set to "true" if delivery acknowledgement from the recipient is requested. otherwise set to "false". Default value is "false".	
payload	string	O	0..1	Payload of the message. This attribute is copied from the associated inbound message.	
segInd	boolean	O	0..1	Indicates this message is part of a segmented message. Set to "true" if the message is part of a segmented message. otherwise set to "false". Default value is "false".	
segParams	MessageSegmentParameters	C	0..1	The message segment parameters. This attribute shall be included only if the value of segInd is true to indicate that message Segment services are requested.	
NOTE: The addrType in Address data type shall only include AS or UE to represent the originating of message request.					

9.1.5.2.3 Type: Address

Table 9.1.5.2.3-1: Definition of type Address

Attribute name	Data type	P	Cardinality	Description	Applicability
addrType	AddressType	M	1	Represent the type of message request.	
addr	string	M	1	Refer to UE Service ID or AS Service ID or Group Service ID or Broadcast Area ID or Messaging Topic.	

9.1.5.3 Simple data types and enumerations

9.1.5.3.1 Introduction

This clause defines simple data types and enumerations that can be referenced from data structures defined in the previous clauses.

9.1.5.3.2 Enumeration: AddressType

Table 9.1.5.3.2-1: Enumeration AddressType

Enumeration value	Description	Applicability
UE	The address type is UE.	
AS	The address type is AS.	
GROUP	The address type is GROUP.	
BC	The address type is BC.	
TOPIC	The address type is TOPIC.	

9.1.6 Error Handling

9.1.6.1 General

HTTP error handling shall be supported as specified in clause 7.7.

In addition, the requirements in the following clauses shall apply.

9.1.6.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MSGG_L3GDelivery API.

9.1.6.3 Application Errors

The application errors defined for the MSGG_L3GDelivery API are listed in table 9.1.6.3-1.

Table 9.1.6.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

9.1.7 Feature negotiation

General feature negotiation procedures are defined in clause 7.8. Table 9.1.7-1 lists the supported features for MSGG_L3GDelivery API.

Table 9.1.7-1: Supported Features

Feature number	Feature Name	Description

9.2 MSGG_N3GDelivery API

9.2.1 API URI

The MSGG_N3GDelivery service shall use the MSGG_N3GDelivery API, The MSGG_N3GDelivery API corresponding to Mn3g APIs as defined in in 3GPP TS 23.554 [2].

The request URIs used in HTTP requests from the MSGin5G Server towards the Non-3GPP Message Gateway shall have the Resource URI structure as defined in clause 7.5 with the following clarifications:

- The <apiName> shall be "msgg-n3gdelivery".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 9.2.3.

9.2.2 Resources

None.

9.2.3 Custom Operations without associated resources

9.2.3.1 Overview

The structure of the custom operation URIs of the MSGG_N3GDelivery service is shown in Figure 9.2.3.1-1.

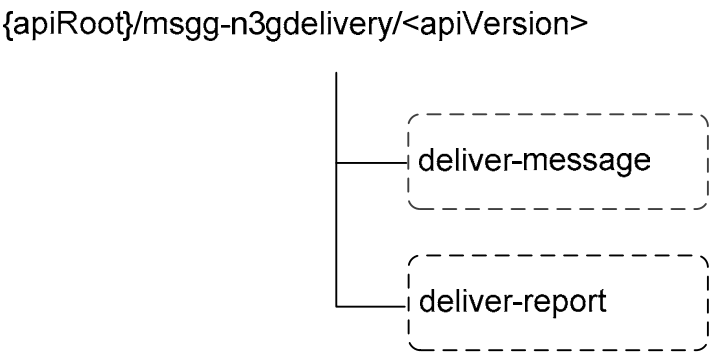


Figure 9.2.3.1-1: Custom operation URI structure of the MSGG_N3GDelivery API

Table 9.2.3.1-1 provides an overview of the custom operations and applicable HTTP methods.

Table 9.2.3.1-1: Custom operations without associated resources

Custom operation URI	Mapped HTTP method	Description
{apiRoot}/msgg-n3gdelivery/<apiVersion>/deliver-message	POST	Request of MSGin5G Server to deliver message to a given Non-3GPP Message Gateway
{apiRoot}/msgg-n3gdelivery/<apiVersion>/deliver-report	POST	Request of MSGin5G Server to deliver status report to a given Non-3GPP Message Gateway

9.2.3.2 Operation: deliver-message

9.2.3.2.1 Description

This operation is used by the MSGin5G Server to deliver message to a given Non-3GPP Message Gateway.

9.2.3.2.2 Operation Definition

This operation shall support the response data structures and response codes specified in table 9.2.3.2.2-1 and table 9.2.3.2.2-2.

Table 9.2.3.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
N3gMessageDelivery	M	1	Represents the data to be used for MSGin5G Server to deliver message.

Table 9.2.3.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The Message is Delivered successfully.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Message Gateway. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Message Gateway. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
NOTE: The mandatory HTTP error status codes for the HTTP POST method listed in Table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 9.2.3.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Message Gateway.

Table 9.2.3.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Message Gateway.

9.2.3.3 Operation: deliver-report

9.2.3.3.1 Description

This operation is used by the MSGin5G Server to deliver status report to a given Non-3GPP Message Gateway.

9.2.3.3.2 Operation Definition

This operation shall support the response data structures and response codes specified in table 9.2.3.3.2-1 and table 9.2.3.3.2-2.

Table 9.2.3.3.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
DeliveryStatusReport	M	1	Represents the data to be used for MSGin5G Server to deliver status report.

Table 9.2.3.3.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The status report is Delivered successfully.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Message Gateway. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Message Gateway. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
NOTE: The mandatory HTTP error status codes for the HTTP POST method listed in Table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 9.2.3.3.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Message Gateway.

Table 9.2.3.3.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Message Gateway.

9.2.4 Notifications

None.

9.2.5 Data Model

9.2.5.1 General

This clause specifies the application data model supported by the API. Data types listed in clause 7.2 apply to this API. Table 9.2.5.1-1 specifies the data types defined specifically for the MSGG_N3GDelivery API service.

Table 9.2.5.1-1: MSGG_N3GDelivery API specific Data Types

Data type	Section defined	Description	Applicability
N3gMessageDelivery	9.2.5.2.2	Information within message delivery request.	

Table 9.2.5.1-2 specifies data types re-used by the MSGG_N3GDelivery API service.

Table 9.2.5.1-2: Re-used Data Types

Data type	Reference	Comments	Applicability
DeliveryStatusReport	8.2.5.2.7	The message delivery status report request information.	
MessageSegmentParameters	8.2.5.2.5	Contains the message segment information of the message.	
Address	9.1.5.2.3	The data type of the oriAddr and destAddr.	

9.2.5.2 Structured data types

9.2.5.2.1 Introduction

9.2.5.2.2 Type: N3gMessageDelivery

Table 9.2.5.2.2-1: Definition of type N3gMessageDelivery

Attribute name	Data type	P	Cardinality	Description	Applicability
oriAddr	Address	M	1	The oriAddr is the service identity of the originating MSGin5G Client or the originating Application Server. This attribute is copied from the associated inbound message (NOTE).	
destAddr	Address	M	1	The destAddr is the service identity of the receiving entity. The receiving entity can only be Non-3GPP UE Service ID in MSGG_N3GDelivery API.	
appld	string	O	0..1	Identifies the application(s) for which the content is intended. This list of Application IDs attribute is required when the message is sent to one or multiple Application Clients served by same MSGin5G Client.	
msgId	string	M	1	Unique identifier of this message. This attribute is copied from the associated inbound message request.	
delivStReqInd	boolean	O	0..1	Indicates if delivery acknowledgement from the recipient is requested. This attribute is copied from the associated inbound message. Set to "true" if delivery acknowledgement from the recipient is requested. otherwise set to "false". Default value is "false".	
payload	string	O	0..1	Payload of the message. This attribute is copied from the associated inbound message.	
segInd	boolean	O	0..1	Indicates this message is part of a segmented message. Set to "true" if the message is part of a segmented message. otherwise set to "false". Default value is "false".	
segParams	MessageSegmentParameters	C	0..1	The message segment parameters. This attribute shall be included only if the value of segInd is true to indicate that message Segment services are requested.	
NOTE: The addrType in Address data type shall only include AS or UE to represent the originating of message request.					

9.2.6 Error Handling

9.2.6.1 General

HTTP error handling shall be supported as specified in clause 7.7.

In addition, the requirements in the following clauses shall apply.

9.2.6.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MSGG_N3GDelivery API.

9.2.6.3 Application Errors

The application errors defined for the MSGG_N3GDelivery API are listed in table 9.2.6.3-1.

Table 9.2.6.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

9.2.7 Feature negotiation

General feature negotiation procedures are defined in clause 7.8. Table 9.2.7-1 lists the supported features for MSGG_N3GDelivery API.

Table 9.2.7-1: Supported Features

Feature number	Feature Name	Description

9.3 MSGG_BGDelivery API

9.3.1 API URI

The MSGG_BGDelivery service shall use the MSGG_BGDelivery API, The MSGG_BGDelivery API corresponding to Mbg APIs as defined in in 3GPP TS 23.554 [2].

The request URIs used in HTTP requests from the MSGin5G Server towards the Broadcast Message Gateway shall have the Resource URI structure as defined in clause 7.5 with the following clarifications:

- The <apiName> shall be "msgg-bgdelivery".
- The <apiVersion> shall be "v1".
- The <apiSpecificResourceUriPart> shall be set as described in clause 9.3.3.

9.3.2 Resources

None.

9.3.3 Custom Operations without associated resources

9.3.3.1 Overview

The structure of the custom operation URIs of the MSGG_BGDelivery service is shown in Figure 9.3.3.1-1.



Figure 9.3.3.1-1: Custom operation URI structure of the MSGG_BGDelivery API

Table 9.3.3.1-1 provides an overview of the custom operations and applicable HTTP methods.

Table 9.3.3.1-1: Custom operations without associated resources

Custom operation URI	Mapped HTTP method	Description
{apiRoot}/msgg-bgdelivery/<apiVersion>/deliver-message	POST	Request of MSGin5G Server to deliver message to a given Broadcast Message Gateway.

9.3.3.2 Operation: deliver-message

9.3.3.2.1 Description

This operation is used by the MSGin5G Server to deliver message to a given Broadcast Message Gateway.

9.3.3.2.2 Operation Definition

This operation shall support the response data structures and response codes specified in table 9.3.3.2.2-1 and table 9.3.3.2.2-2.

Table 9.3.3.2.2-1: Data structures supported by the POST Request Body on this resource

Data type	P	Cardinality	Description
BgMessageDelivery	M	1	Represents the data to be used for MSGin5G Server to deliver message.

Table 9.3.3.2.2-2: Data structures supported by the POST Response Body on this resource

Data type	P	Cardinality	Response codes	Description
n/a			204 No Content	The Message is delivered successfully.
n/a			307 Temporary Redirect	Temporary redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Message Gateway. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
n/a			308 Permanent Redirect	Permanent redirection. The response shall include a Location header field containing an alternative URI of the resource located in an alternative MSGin5G Message Gateway. Redirection handling is described in clause 5.2.10 of 3GPP TS 29.122 [24].
NOTE: The mandatory HTTP error status codes for the HTTP POST method listed in Table 5.2.6-1 of 3GPP TS 29.122 [24] shall also apply.				

Table 9.3.3.2.2-3: Headers supported by the 307 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Message Gateway.

Table 9.3.3.2.2-4: Headers supported by the 308 Response Code on this resource

Name	Data type	P	Cardinality	Description
Location	string	M	1	Contains an alternative URI of the resource located in an alternative MSGin5G Message Gateway.

9.3.4 Notifications

None.

9.3.5 Data Model

9.3.5.1 General

This clause specifies the application data model supported by the API. Data types listed in clause 7.2 apply to this API. Table 9.3.5.1-1 specifies the data types defined specifically for the MSGG_BGDelivery API service.

Table 9.3.5.1-1: MSGG_BGDelivery API specific Data Types

Data type	Section defined	Description	Applicability
BgMessageDelivery	9.3.5.2.2	Information within broadcast message delivery request.	

Table 9.3.5.1-2 specifies data types re-used by the MSGG_BGDelivery API service.

Table 9.3.5.1-2: Re-used Data Types

Data type	Reference	Comments	Applicability
Address	9.1.5.2.3	The data type of the oriAddr and destAddr.	
MessageSegmentParameters	8.2.5.2.5	The data type of the segParams	
Priority	8.2.5.3.5	The data type of the priority	

9.3.5.2 Structured data types

9.3.5.2.1 Introduction

9.3.5.2.2 Type: BgMessageDelivery

Table 9.3.5.2.2-1: Definition of type BgMessageDelivery

Attribute name	Data type	P	Cardinality	Description	Applicability
oriAddr	Address	M	1	The service identity of the originating MSGin5G Client or the originating Application Server. (NOTE).	
destAddr	Address	O	0..1	The service identity of the Broadcast Service Area where the message needs to be broadcast.	
appld	string	O	0..1	Identifies the application(s) for which the content is intended. This list of Application IDs IE is required when the message is sent to one or multiple Application Clients served by same MSGin5G Client.	
msgld	string	M	1	Unique identifier of this message.	
delivStReqInd	boolean	O	0..1	Indicates if delivery acknowledgement from the recipient is requested. Set to "true" if delivery acknowledgement from the recipient is requested. otherwise set to "false". Default value is "false".	
payload	string	O	0..1	Payload of the message.	
grpSrvId	string	O	0..1	Identifies Service Identifier of a Group.	
msgTopic	string	O	0..1	Indicates the related Messaging Topic.	
segInd	boolean	O	0..1	Indicates this message is part of a segmented message. Set to "true" if the message is part of a segmented message. otherwise set to "false". Default value is "false".	
segParams	MessageSegmentParameters	C	0..1	The message segment parameters. This IE shall be included only if the value of the attribute segInd is set to "true".	
priority	Priority	O	0..1	Application priority level requested for this message.	
NOTE: The addrType in Address data type shall only include AS or UE to represent the originating of message request.					

9.3.5.3 Simple data types and enumerations

None.

9.3.6 Error Handling

9.3.6.1 General

HTTP error handling shall be supported as specified in clause 7.7.

In addition, the requirements in the following clauses shall apply.

9.3.6.2 Protocol Errors

In this Release of the specification, there are no additional protocol errors applicable for the MSGG_BGDelivery API.

9.3.6.3 Application Errors

The application errors defined for the MSGG_BGDelivery API are listed in table 9.3.6.3-1.

Table 9.3.6.3-1: Application errors

Application Error	HTTP status code	Description	Applicability

9.3.7 Feature negotiation

General feature negotiation procedures are defined in clause 7.8. Table 9.3.7-1 lists the supported features for MSGG_BGDelivery API.

Table 9.3.7-1: Supported Features

Feature number	Feature Name	Description

10 Security

TLS shall be used to support the security communication between the service producer (e.g., MSGin5G Server, Message Gateway) and the service consumer as specified in 3GPP TS 33.862 [19] and 3GPP TS 33.501 [20].

When CAPIF is not supported and/or not used, the access to the MSGin5G Service APIs shall be authorized by means of OAuth2 protocol (see IETF RFC 6749 [21]), based on local configuration, using the "Client Credentials" authorization grant. When OAuth2 is used, a client shall obtain a "token" from the authorization server prior to consuming services offered by any MSGin5G Service API.

When the service producer (e.g., MSGin5G Server, Message Gateway) supports CAPIF for external exposure and CAPIF is used, the provisions of clause 11.2 shall apply for authorizing the access to the MSGin5G APIs.

11 Using Common API Framework

11.1 General

When CAPIF is used with a MSGin5G service, the service producer (e.g., MSGin5G Server, Message Gateway) shall support the following as defined in 3GPP TS 29.222 [8]:

- the API exposing function and related APIs over CAPIF-2/2e and CAPIF-3/3e reference points;
- the API publishing function and related APIs over CAPIF-4/4e reference point;
- the API management function and related APIs over CAPIF-5/5e reference point; and
- at least one of the security methods for authentication and authorization, and related security mechanisms.

In a centralized deployment as defined in 3GPP TS 23.222 [7], where the CAPIF core function and API provider domain functions are co-located, the interactions between the CAPIF core function and API provider domain functions may be independent of CAPIF-3/3e, CAPIF-4/4e and CAPIF-5/5e reference points.

When CAPIF is used with a MSGin5G service, the service producer (e.g., MSGin5G Server, Message Gateway) shall register all the features for northbound APIs in the CAPIF Core Function.

11.2 Security

When CAPIF is used for managing the exposure of the MSGin5G APIs, before invoking an API exposed by an MSGin5G Enabler Layer entity (e.g., MSGin5G Server, Message Gateway), the service consumer, acting as an API Invoker, shall negotiate the security method (PKI, TLS-PSK or OAuth2) with the CAPIF Core Function and ensure that the MSGin5G Enabler Layer entity has enough credential to authenticate the service consumer, as defined in clauses 5.6.2.2 and 6.2.2.2 of 3GPP TS 29.222 [8].

If PKI or TLS-PSK is used as the selected security method between the service consumer and the MSGin5G Enabler Layer entity, upon API invocation, the MSGin5G Enabler Layer entity shall retrieve the authorization information from the CAPIF Core Function as described in clause 5.6.2.4 of 3GPP TS 29.222 [8].

As indicated in 3GPP TS 33.122 [22], the access to the MSGin5G Enabler Layer entity APIs may be authorized by means of the OAuth2 protocol (see IETF RFC 6749 [21]), where the CAPIF Core Function (see 3GPP TS 29.222 [8]) plays the role of the authorization server.

If OAuth2 is used as the selected security method between the service consumer and the MSGin5G Enabler Layer entity, the service consumer, prior to consuming services offered by the MSGin5G Enabler Layer entity APIs, shall obtain a "token" from the authorization server, by invoking the Obtain_Authorization service, as described in clause 5.6.2.3.2 of 3GPP TS 29.222 [8].

The MSGin5G APIs do not define any scopes for OAuth2 authorization in the present specification. For the definition and handling of scopes for OAuth2 authorization in CAPIF, see 3GPP TS 29.222 [8].

It is the MSGin5G Enabler Layer entity's responsibility to check whether the service consumer is authorized to use an API based on the "token". Once the MSGin5G Enabler Layer entity verifies the "token", it shall check whether the MSGin5G Enabler Layer entity's identifier in the "token" matches its own published identifier, whether the API name in the "token" matches its own published API name and whether the granted scope (see 3GPP TS 29.222 [8]) in the "token" is authorized. If those checks are passed, the service consumer has full authority to access any resource(s) and/or operation(s) for the invoked service API and that are within the limits of the granted scope in the "token".

NOTE: For the aforementioned security methods, the MSGin5G Enabler Layer entity needs to apply admission control according to access control policies after performing the authorization checks.

12 Usage of Network Capabilities

As specified in 3GPP TS 23.554 [2], MSGin5G Server may perform procedures of UE reachability monitoring and device triggering by consuming the 3GPP core network capabilities from SCEF/NEF as specified in 3GPP TS 29.522 [23], with description of the AF applies to the MSGin5G Server. With usage of network capabilities, the following procedure for UE reachability monitoring and device triggering procedure could be supported. Upon the MSGin5G Server receiving a request to send MSGin5G message to a MSGin5G UE, the MSGin5G Server may determine whether the recipient MSGin5G Client is not reachable:

- by using the recipient's information received when performing the procedures specified in clause 8.9.2.2 of 3GPP TS 23.554 [2]; or
- by using the recipient's availability information provided by MSGin5G Client at registration as specified in clause 8.2.1 of 3GPP TS 23.554 [2].

If the recipient MSGin5G Client is not reachable, the MSGin5G Server may send a request for device triggering to SCEF/NEF as specified in clause 4.4.3 of 3GPP TS 29.522 [23]. The request uses the information provided by the MSGin5G Client at registration in the MSGin5G Client Triggering Information IE. And the MSGin5G Server may use the MSGin5G Client communication availability and/or pre-configured information to determine the timing of the device triggering request, e.g. the trigger request may be sent to ensure that the target UE is reachable prior to resuming MSGin5G communications.

As specified in clause 4.4.6 of 3GPP TS 29.122 [24], upon the MSGin5G Server receiving an HTTP POST request from SCEF/NEF indicating the result of the triggering delivery, the MSGin5G Server shall respond with an HTTP 200 OK or 204 No Content response.

Annex A (normative): OpenAPI specification

A.1 General

This Annex is based on the OpenAPI Specification [6] and provides corresponding representations of all APIs defined in the present specification.

NOTE 1: An OpenAPIs representation embeds JSON Schema representations of HTTP message bodies.

This Annex shall take precedence when being discrepant to other parts of the specification with respect to the encoding of information elements and methods within the API(s).

NOTE 2: The semantics and procedures, as well as conditions, e.g. for the applicability and allowed combinations of attributes or values, not expressed in the OpenAPI definitions but defined in other parts of the specification also apply.

Informative copies of the OpenAPI specification files contained in this 3GPP Technical Specification are available on a Git-based repository, that uses the GitLab software version control system (see clause 5B of the 3GPP TR 21.900 [18] and clause 5.3.1 of the 3GPP TS 29.501 [9] for further information).

A.2 MSGS_ASRegistration API

```
openapi: 3.0.0
info:
  title: MSGS_ASRegistration
  version: 1.2.0
  description: |
    API for MSGS AS Registration Service.
    © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: >
    3GPP TS 29.538 V19.4.0; Enabling MSGin5G Service; Application Programming Interfaces (API)
    specification; Stage 3
  url: https://www.3gpp.org/ftp/Specs/archive/29_series/29.538/

servers:
- url: '{apiRoot}/msgs-asregistration/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122

security:
- {}
- oAuth2ClientCredentials: []

paths:
  /registrations:
    post:
      summary: Registers a new AS at a MSGin5G Server
      tags:
        - AS registration
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/ASRegistration'
      responses:
        '201':
          description: AS information is registered successfully at MSGin5G Server
          content:
            application/json:
              schema:
```

```

    $ref: '#/components/schemas/ASRegistrationAck'
  headers:
    Location:
      description: 'Contains the URI of the newly created resource'
      required: true
      schema:
        type: string
  '400':
    $ref: 'TS29122_CommonData.yaml#/components/responses/400'
  '401':
    $ref: 'TS29122_CommonData.yaml#/components/responses/401'
  '403':
    $ref: 'TS29122_CommonData.yaml#/components/responses/403'
  '404':
    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

/registrations/{registrationId}:

```

delete:
  summary: Delete an existing AS registration at MSGin5G Server
  tags:
    - AS DeRegistration
  parameters:
    - name: registrationId
      in: path
      description: AS registration Id
      required: true
      schema:
        type: string
  responses:
    '200':
      description: The individual AS registration is deleted successfully.
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/ASRegistrationAck'
    '204':
      description: >
        No Content. The individual AS registration resource is deleted successfully.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

```

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2

```

```
flows:
  clientCredentials:
    tokenUrl: '{tokenUrl}'
    scopes: {}

schemas:
#
# STRUCTURED DATA TYPES
#
ASRegistration:
  description: AS registration data
  type: object
  required:
    - asSvcId
  properties:
    asSvcId:
      type: string
    appId:
      type: string
    targetUri:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Uri'
    reqExprTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
    exGroupList:
      type: array
      items:
        type: string
      minItems: 1
      description: The group list which the AS will control.
    asProf:
      $ref: '#/components/schemas/ASProfile'

ASRegistrationAck:
  description: AS registration response data
  type: object
  required:
    - asSvcId
    - result
  properties:
    asSvcId:
      type: string
    result:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/ProblemDetails'
    regExprTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'

ASProfile:
  description: AS profile information
  type: object
  properties:
    appName:
      type: string
    appProviders:
      type: array
      items:
        type: string
      minItems: 1
      description: The provider of the AS.
    appSenarios:
      type: array
      items:
        type: string
      minItems: 1
      description: The application scenario.
    appCategory:
      type: string
    asStatus:
      type: string
```

A.3 MSGS_MSGSDelivery API

```
openapi: 3.0.0
info:
  title: MSGS_MSGSDelivery
```

```
version: 1.2.0
description: |
  API for MSGG MSGin5G Server Message Delivery Service.
  © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
  All rights reserved.

externalDocs:
  description: >
    3GPP TS 29.538 V19.4.0; Enabling MSGin5G Service; Application Programming Interfaces (API)
    specification; Stage 3
  url: https://www.3gpp.org/ftp/Specs/archive/29_series/29.538/

servers:
- url: '{apiRoot}/msgs-msgdelivery/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122

security:
- {}
- oAuth2ClientCredentials: []

paths:
  /deliver-as-message:
    post:
      summary: AS deliver message to MSGin5G Server
      tags:
        - AS Message delivery
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/ASMessageDelivery'
      responses:
        '200':
          description: OK, AS Message delivery successful
          content:
            application/json:
              schema:
                $ref: '#/components/schemas/MessageDeliveryAck'
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29122_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29122_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29122_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'
        '500':
          $ref: 'TS29122_CommonData.yaml#/components/responses/500'
        '503':
          $ref: 'TS29122_CommonData.yaml#/components/responses/503'
        default:
          $ref: 'TS29122_CommonData.yaml#/components/responses/default'

  /deliver-ue-message:
    post:
      summary: UE deliver message to MSGin5G Server
      tags:
        - UE Message delivery
      requestBody:
        required: true
        content:
```

```
    application/json:
      schema:
        $ref: '#/components/schemas/UEMessageDelivery'
  responses:
    '200':
      description: OK, UE Message delivery successful
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MessageDeliveryAck'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/deliver-report:
  post:
    summary: AS or UE deliver status report to MSGin5G Server
    tags:
      - AS/UE status report delivery
    requestBody:
      required: true
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/DeliveryStatusReport'
  responses:
    '200':
      description: OK, status report delivery successfully
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/MessageDeliveryAck'
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
```

```
$ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
```

```
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
```

```
schemas:
```

```
#
```

```
# STRUCTURED DATA TYPES
```

```
#
```

```
ASMessageDelivery:
  description: Contains the AS message delivery data
  type: object
  required:
    - oriAddr
    - destAddr
    - msgId
    - stoAndFwInd
  properties:
    oriAddr:
      $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
    destAddr:
      $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
    appId:
      type: string
    msgId:
      type: string
    delivStReqInd:
      type: boolean
    payload:
      type: string
    priority:
      $ref: '#/components/schemas/Priority'
    segInd:
      type: boolean
    segParams:
      $ref: '#/components/schemas/MessageSegmentParameters'
    stoAndFwInd:
      type: boolean
    stoAndFwParams:
      $ref: '#/components/schemas/StoreAndForwardParameters'
    latency:
      type: integer
    notiUrl:
      type: string
```

```
UEMessageDelivery:
  description: Contains the UE message delivery data
  type: object
  required:
    - oriAddr
    - destAddr
    - msgId
    - stoAndFwInd
  properties:
    oriAddr:
      $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
    destAddr:
      $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
    appId:
      type: string
    msgId:
      type: string
    delivStReqInd:
      type: boolean
    payload:
      type: string
    segInd:
      type: boolean
```

```
    segParams:
      $ref: '#/components/schemas/MessageSegmentParameters'
    stoAndFwInd:
      type: boolean
    stoAndFwParams:
      $ref: '#/components/schemas/StoreAndForwardParameters'

MessageDeliveryAck:
  description: Contains the message delivery ack data
  type: object
  required:
    - oriAddr
    - msgId
  properties:
    oriAddr:
      $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
    msgId:
      type: string
    status:
      $ref: '#/components/schemas/DeliveryStatus'
    failureCause:
      type: string

MessageSegmentParameters:
  description: Contains the message segment parameters data
  type: object
  properties:
    segId:
      type: string
    totalSegCount:
      type: integer
    segNumb:
      type: integer
    lastSegFlag:
      type: boolean

StoreAndForwardParameters:
  description: Contains the store and forward parameters data
  type: object
  properties:
    exprTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'

DeliveryStatusReport:
  description: Contains the delivery status report data
  type: object
  required:
    - oriAddr
    - destAddr
    - msgId
    - delivSt
  properties:
    oriAddr:
      $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
    destAddr:
      $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
    msgId:
      type: string
    failureCause:
      type: string
    delivSt:
      $ref: '#/components/schemas/ReportDeliveryStatus'

#
# SIMPLE DATA TYPES
#

#
# ENUMERATIONS
#

DeliveryStatus:
  anyOf:
    - type: string
    enum:
      - DELY_FAILED
      - DELY_STORED
    - type: string
```

```

    description: >
      This string provides forward-compatibility with future
      extensions to the enumeration but is not used to encode
      content defined in the present version of this API.
  description: |
    Indicates if delivery is a failure, or if the message is stored for deferred delivery.
    Possible values are:
    - DELY_FAILED: Indicates that the message delivery is failed.
    - DELY_STORED: Indicates that the message is stored for deferred delivery.

ReportDeliveryStatus:
  anyOf:
  - type: string
    enum:
      - REPT_DELY_SUCCESS
      - REPT_DELY_FAILED
  - type: string
    description: >
      This string provides forward-compatibility with future
      extensions to the enumeration but is not used to encode
      content defined in the present version of this API.
  description: |
    The delivery status description, including success or failure in delivery.
    Possible values are:
    - REPT_DELY_SUCCESS: Indicates that the report delivery is successful.
    - REPT_DELY_FAILED: Indicates that the report delivery is failed.

Priority:
  anyOf:
  - type: string
    enum:
      - HIGH
      - MIDDLE
      - LOW
  - type: string
    description: >
      This string provides forward-compatibility with future
      extensions to the enumeration but is not used to encode
      content defined in the present version of this API.
  description: |
    Application priority level requested for this message.
    Possible values are:
    - HIGH: Indicates the messages should be sent in high priority.
    - MIDDLE: Indicates the messages should be sent in middle priority.
    - LOW: Indicates the messages should be sent in low priority.

```

A.4 MSGG_L3GDelivery API

```

openapi: 3.0.0
info:
  title: MSGG_L3GDelivery
  version: 1.2.0
  description: |
    API for MSGG L3G Message Delivery Service.
    © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: >
    3GPP TS 29.538 V19.4.0; Enabling MSGin5G Service; Application Programming Interfaces (API)
    specification; Stage 3
  url: https://www.3gpp.org/ftp/Specs/archive/29_series/29.538/

servers:
  - url: '{apiRoot}/msgg-l3gdelivery/v1'
    variables:
      apiRoot:
        default: https://example.com
        description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122

security:
  - {}
  - oAuth2ClientCredentials: []

paths:

```

```
/deliver-message:
  post:
    summary: deliver message to Legacy 3GPP Message Gateway
    tags:
      - L3G Message delivery
    requestBody:
      required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/L3gMessageDelivery'
    responses:
      '204':
        description: No Content, Message delivery successful
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29122_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'

/deliver-report:
  post:
    summary: deliver status report to Legacy 3GPP Message Gateway
    tags:
      - L3G status report delivery
    requestBody:
      required: true
    content:
      application/json:
        schema:
          $ref: 'TS29538_MSGS_MSGDelivery.yaml#/components/schemas/DeliveryStatusReport'
    responses:
      '204':
        description: No Content, status report delivery successfully
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29122_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
```

```
$ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'
```

```
components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
```

```
schemas:
```

```
#
# STRUCTURED DATA TYPES
#
  L3gMessageDelivery:
    description: Contains the L3G message delivery data
    type: object
    required:
      - oriAddr
      - destAddr
      - msgId
    properties:
      oriAddr:
        $ref: '#/components/schemas/Address'
      destAddr:
        $ref: '#/components/schemas/Address'
      appId:
        type: string
      msgId:
        type: string
      delivStReqInd:
        type: boolean
      payload:
        type: string
      segInd:
        type: boolean
      segParams:
        $ref: 'TS29538_MSGS_MSGDelivery.yaml#/components/schemas/MessageSegmentParameters'
```

```
Address:
  description: Contains the Message type data
  type: object
  required:
    - addrType
    - addr
  properties:
    addrType:
      $ref: '#/components/schemas/AddressType'
    addr:
      type: string
```

```
#
# SIMPLE DATA TYPES
#
```

```
#
# ENUMERATIONS
#
```

```
AddressType:
  anyOf:
    - type: string
    enum:
      - UE
      - AS
      - GROUP
      - BC
      - TOPIC
    - type: string
  description: >
```

This string provides forward-compatibility with future extensions to the enumeration but is not used to encode content defined in the present version of this API.

description: |
 Represent the type of message request.
 Possible values are:
 - UE: The address type is UE.
 - AS: The address type is AS.
 - GROUP: The address type is GROUP.
 - BC: The address type is BC.
 - TOPIC: The address type is TOPIC.

A.5 MSGG_N3GDelivery API

openapi: 3.0.0

info:

title: MSGG_N3GDelivery
 version: 1.2.0
 description: |
 API for MSGG N3G Message Delivery Service.
 © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
 All rights reserved.

externalDocs:

description: >
 3GPP TS 29.538 V19.4.0; Enabling MSGin5G Service; Application Programming Interfaces (API)
 specification; Stage 3
 url: https://www.3gpp.org/ftp/Specs/archive/29_series/29.538/

servers:

- url: '{apiRoot}/msgg-n3gdelivery/v1'
 variables:
 apiRoot:
 default: <https://example.com>
 description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122

security:

- {}
 - oAuth2ClientCredentials: []

paths:

/deliver-message:
 post:
 summary: deliver message to NON-3GPP Message Gateway
 tags:
 - N3G Message delivery
 requestBody:
 required: true
 content:
 application/json:
 schema:
 \$ref: '#/components/schemas/N3gMessageDelivery'
 responses:
 '204':
 description: No Content, Message delivery successful
 '307':
 \$ref: 'TS29122_CommonData.yaml#/components/responses/307'
 '308':
 \$ref: 'TS29122_CommonData.yaml#/components/responses/308'
 '400':
 \$ref: 'TS29122_CommonData.yaml#/components/responses/400'
 '401':
 \$ref: 'TS29122_CommonData.yaml#/components/responses/401'
 '403':
 \$ref: 'TS29122_CommonData.yaml#/components/responses/403'
 '404':
 \$ref: 'TS29122_CommonData.yaml#/components/responses/404'
 '411':
 \$ref: 'TS29122_CommonData.yaml#/components/responses/411'
 '413':
 \$ref: 'TS29122_CommonData.yaml#/components/responses/413'
 '415':
 \$ref: 'TS29122_CommonData.yaml#/components/responses/415'
 '429':
 \$ref: 'TS29122_CommonData.yaml#/components/responses/429'
 '500':

```
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'
```

/deliver-report:

```
  post:
    summary: deliver status report to NON-3GPP Message Gateway
    tags:
      - N3G status report delivery
    requestBody:
      required: true
      content:
        application/json:
          schema:
            $ref: 'TS29538_MSGS_MSGDelivery.yaml#/components/schemas/DeliveryStatusReport'
    responses:
      '204':
        description: No Content, status report delivery successfully
      '307':
        $ref: 'TS29122_CommonData.yaml#/components/responses/307'
      '308':
        $ref: 'TS29122_CommonData.yaml#/components/responses/308'
      '400':
        $ref: 'TS29122_CommonData.yaml#/components/responses/400'
      '401':
        $ref: 'TS29122_CommonData.yaml#/components/responses/401'
      '403':
        $ref: 'TS29122_CommonData.yaml#/components/responses/403'
      '404':
        $ref: 'TS29122_CommonData.yaml#/components/responses/404'
      '411':
        $ref: 'TS29122_CommonData.yaml#/components/responses/411'
      '413':
        $ref: 'TS29122_CommonData.yaml#/components/responses/413'
      '415':
        $ref: 'TS29122_CommonData.yaml#/components/responses/415'
      '429':
        $ref: 'TS29122_CommonData.yaml#/components/responses/429'
      '500':
        $ref: 'TS29122_CommonData.yaml#/components/responses/500'
      '503':
        $ref: 'TS29122_CommonData.yaml#/components/responses/503'
      default:
        $ref: 'TS29122_CommonData.yaml#/components/responses/default'
```

components:

```
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}
```

schemas:

```
#
# STRUCTURED DATA TYPES
#
  N3gMessageDelivery:
    description: N3G message delivery data
    type: object
    required:
      - oriAddr
      - destAddr
      - msgId
    properties:
      oriAddr:
        $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
      destAddr:
        $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
      appId:
        type: string
      msgId:
```

```

    type: string
  delivStReqInd:
    type: boolean
  payload:
    type: string
  segInd:
    type: boolean
  segParams:
    $ref: 'TS29538_MSGS_MSGDelivery.yaml#/components/schemas/MessageSegmentParameters'

```

A.6 MSGG_BGDelivery API

openapi: 3.0.0

```

info:
  title: MSGG_BGDelivery
  version: 1.1.0
  description: |
    API for Broadcast Message Delivery Service.
    © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

externalDocs:
  description: >
    3GPP TS 29.538 V19.4.0; Enabling MSGin5G Service; Application Programming Interfaces (API)
    specification; Stage 3
  url: https://www.3gpp.org/ftp/Specs/archive/29_series/29.538/

servers:
- url: '{apiRoot}/msgg-bgdelivery/v1'
  variables:
    apiRoot:
      default: https://example.com
      description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122

security:
- {}
- oAuth2ClientCredentials: []

paths:
  /deliver-message:
    post:
      summary: deliver message to Broadcast Message Gateway
      tags:
        - Broadcast Message delivery
      requestBody:
        required: true
        content:
          application/json:
            schema:
              $ref: '#/components/schemas/BgMessageDelivery'
      responses:
        '204':
          description: No Content, Message delivery successful
        '307':
          $ref: 'TS29122_CommonData.yaml#/components/responses/307'
        '308':
          $ref: 'TS29122_CommonData.yaml#/components/responses/308'
        '400':
          $ref: 'TS29122_CommonData.yaml#/components/responses/400'
        '401':
          $ref: 'TS29122_CommonData.yaml#/components/responses/401'
        '403':
          $ref: 'TS29122_CommonData.yaml#/components/responses/403'
        '404':
          $ref: 'TS29122_CommonData.yaml#/components/responses/404'
        '411':
          $ref: 'TS29122_CommonData.yaml#/components/responses/411'
        '413':
          $ref: 'TS29122_CommonData.yaml#/components/responses/413'
        '415':
          $ref: 'TS29122_CommonData.yaml#/components/responses/415'
        '429':
          $ref: 'TS29122_CommonData.yaml#/components/responses/429'

```

```

    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

components:
  securitySchemes:
    oAuth2ClientCredentials:
      type: oauth2
      flows:
        clientCredentials:
          tokenUrl: '{tokenUrl}'
          scopes: {}

  schemas:
    #
    # STRUCTURED DATA TYPES
    #
    BgMessageDelivery:
      description: Broadcast message delivery data
      type: object
      required:
        - oriAddr
        - msgId
      properties:
        oriAddr:
          $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
        destAddr:
          $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
        appId:
          type: string
        msgId:
          type: string
        delivStReqInd:
          type: boolean
        grpSrvId:
          type: string
        msgTopic:
          type: string
        payload:
          type: string
        segInd:
          type: boolean
        segParams:
          $ref: 'TS29538_MSGS_MSGDelivery.yaml#/components/schemas/MessageSegmentParameters'
        priority:
          $ref: 'TS29538_MSGS_MSGDelivery.yaml#/components/schemas/Priority'

```

A.7 MSGS_TopiclistEvent API

openapi: 3.0.0

```

info:
  title: MSGS_TopiclistEvent
  version: 1.1.0
  description: |
    API for Topic Messaging Event Service.
    © 2025, 3GPP Organizational Partners (ARIB, ATIS, CCSA, ETSI, TSDSI, TTA, TTC).
    All rights reserved.

```

```

externalDocs:
  description: >
    3GPP TS 29.538 V19.4.0; Enabling MSGin5G Service; Application Programming Interfaces (API)
    specification; Stage 3
  url: https://www.3gpp.org/ftp/Specs/archive/29_series/29.538/

```

```

servers:
  - url: '{apiRoot}/msgs-topiclistevent/v1'
    variables:
      apiRoot:
        default: https://example.com

```

description: apiRoot as defined in clause 5.2.4 of 3GPP TS 29.122

security:

- {}
- OAuth2ClientCredentials:
- msg5-topiclistevent

paths:

/topiclist-subscriptions:

post:

summary: subscribe to Messaging Topic list on a MSGin5G Server

tags:

- Topic List Subscription

requestBody:

required: true

content:

application/json:

schema:

\$ref: '#/components/schemas/TopicListSubscription'

responses:

'201':

description: Topic list on the MSGin5G Server is successfully subscribed

content:

application/json:

schema:

\$ref: '#/components/schemas/TopicListSubscription'

headers:

Location:

description: 'Contains the URI of the newly created resource'

required: true

schema:

type: string

'400':

\$ref: 'TS29122_CommonData.yaml#/components/responses/400'

'401':

\$ref: 'TS29122_CommonData.yaml#/components/responses/401'

'403':

\$ref: 'TS29122_CommonData.yaml#/components/responses/403'

'404':

\$ref: 'TS29122_CommonData.yaml#/components/responses/404'

'411':

\$ref: 'TS29122_CommonData.yaml#/components/responses/411'

'413':

\$ref: 'TS29122_CommonData.yaml#/components/responses/413'

'415':

\$ref: 'TS29122_CommonData.yaml#/components/responses/415'

'429':

\$ref: 'TS29122_CommonData.yaml#/components/responses/429'

'500':

\$ref: 'TS29122_CommonData.yaml#/components/responses/500'

'503':

\$ref: 'TS29122_CommonData.yaml#/components/responses/503'

default:

\$ref: 'TS29122_CommonData.yaml#/components/responses/default'

callbacks:

MessagingTopicListNotification:

'{\$request.body#/notificationURI}':

post:

requestBody:

required: true

content:

application/json:

schema:

\$ref: '#/components/schemas/TopicListNotification'

responses:

'204':

description: No Content (successful notification)

'307':

\$ref: 'TS29122_CommonData.yaml#/components/responses/307'

'308':

\$ref: 'TS29122_CommonData.yaml#/components/responses/308'

'400':

\$ref: 'TS29122_CommonData.yaml#/components/responses/400'

'401':

\$ref: 'TS29122_CommonData.yaml#/components/responses/401'

'403':

\$ref: 'TS29122_CommonData.yaml#/components/responses/403'

'404':

```

    $ref: 'TS29122_CommonData.yaml#/components/responses/404'
  '411':
    $ref: 'TS29122_CommonData.yaml#/components/responses/411'
  '413':
    $ref: 'TS29122_CommonData.yaml#/components/responses/413'
  '415':
    $ref: 'TS29122_CommonData.yaml#/components/responses/415'
  '429':
    $ref: 'TS29122_CommonData.yaml#/components/responses/429'
  '500':
    $ref: 'TS29122_CommonData.yaml#/components/responses/500'
  '503':
    $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

/topiclist-subscriptions/{subscriptionId}:

parameters:

```

- name: subscriptionId
  in: path
  description: >
    Represents the identifier of the Individual Topic List Subscription resource.
  required: true
  schema:
    type: string

```

delete:

summary: Request the deletion of an existing Individual Topic List Subscription resource.

operationId: DeleteIndTopicListSubsc

tags:

- Individual Topic List Subscription (Document)

responses:

```

'204':
  description: >
    No Content. The Individual Topic List Subscription resource is successfully
    deleted.
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'
'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
  default:
    $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

/request-topic-subscription:

post:

summary: subscribe to Messaging Topic on a MSGin5G Server

tags:

- Messaging Topic Subscription

requestBody:

```

  required: true
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/TopicSubscription'

```

responses:

```

'200':
  description: The Messaging Topic subscription is created successfully.
  content:
    application/json:
      schema:
        $ref: '#/components/schemas/TopicSubscriptionAck'
'307':
  $ref: 'TS29122_CommonData.yaml#/components/responses/307'

```

```

'308':
  $ref: 'TS29122_CommonData.yaml#/components/responses/308'
'400':
  $ref: 'TS29122_CommonData.yaml#/components/responses/400'
'401':
  $ref: 'TS29122_CommonData.yaml#/components/responses/401'
'403':
  $ref: 'TS29122_CommonData.yaml#/components/responses/403'
'404':
  $ref: 'TS29122_CommonData.yaml#/components/responses/404'
'411':
  $ref: 'TS29122_CommonData.yaml#/components/responses/411'
'413':
  $ref: 'TS29122_CommonData.yaml#/components/responses/413'
'415':
  $ref: 'TS29122_CommonData.yaml#/components/responses/415'
'429':
  $ref: 'TS29122_CommonData.yaml#/components/responses/429'
'500':
  $ref: 'TS29122_CommonData.yaml#/components/responses/500'
'503':
  $ref: 'TS29122_CommonData.yaml#/components/responses/503'
default:
  $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

/request-topic-unsubscription:

```

post:
  summary: unsubscribe to Messaging Topic on a MSGin5G Server
  tags:
    - Messaging Topic Unsubscription
  requestBody:
    required: true
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/TopicUnsubscription'
  responses:
    '204':
      description: >
        No Content. The Messaging Topic subscription is removed successfully.
    '307':
      $ref: 'TS29122_CommonData.yaml#/components/responses/307'
    '308':
      $ref: 'TS29122_CommonData.yaml#/components/responses/308'
    '400':
      $ref: 'TS29122_CommonData.yaml#/components/responses/400'
    '401':
      $ref: 'TS29122_CommonData.yaml#/components/responses/401'
    '403':
      $ref: 'TS29122_CommonData.yaml#/components/responses/403'
    '404':
      $ref: 'TS29122_CommonData.yaml#/components/responses/404'
    '411':
      $ref: 'TS29122_CommonData.yaml#/components/responses/411'
    '413':
      $ref: 'TS29122_CommonData.yaml#/components/responses/413'
    '415':
      $ref: 'TS29122_CommonData.yaml#/components/responses/415'
    '429':
      $ref: 'TS29122_CommonData.yaml#/components/responses/429'
    '500':
      $ref: 'TS29122_CommonData.yaml#/components/responses/500'
    '503':
      $ref: 'TS29122_CommonData.yaml#/components/responses/503'
    default:
      $ref: 'TS29122_CommonData.yaml#/components/responses/default'

```

components:

```

securitySchemes:
  oAuth2ClientCredentials:
    type: oauth2
    flows:
      clientCredentials:
        tokenUrl: '{tokenUrl}'
        scopes: {}

```

schemas:

```
#
# STRUCTURED DATA TYPES
#
TopicListSubscription:
  description: Messaging Topic list subscription data
  type: object
  required:
    - oriAddr
    - destAddr
    - notificationURI
  properties:
    oriAddr:
      $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
    destAddr:
      $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
    notificationURI:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/Uri'
    exprTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
    suppFeat:
      $ref: 'TS29571_CommonData.yaml#/components/schemas/SupportedFeatures'

TopicListUnsubscription:
  description: Messaging Topic list unsubscription data
  type: object
  required:
    - oriAddr
    - destAddr
  properties:
    oriAddr:
      $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
    destAddr:
      $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'

TopicListUnsubscriptionAck:
  description: Response of Messaging Topic list unsubscription
  type: object
  required:
    - subStat
  properties:
    subStat:
      type: string

TopicSubscription:
  description: Messaging Topic subscription data
  type: object
  required:
    - oriAddr
    - msgTopics
  properties:
    oriAddr:
      $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
    msgTopics:
      type: array
      items:
        type: string
      minItems: 1
      description: A list of Messaging Topics to be subscribed.
    exprTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'

TopicSubscriptionAck:
  description: Response of Messaging Topic subscription
  type: object
  required:
    - subStat
  properties:
    subStat:
      type: string
    exprTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'

TopicUnsubscription:
  description: Messaging Topic unsubscription data
  type: object
  required:
    - oriAddr
    - msgTopics
```

```
properties:
  oriAddr:
    $ref: 'TS29538_MSGG_L3GDelivery.yaml#/components/schemas/Address'
  msgTopics:
    type: array
    items:
      type: string
    minItems: 1
    description: A list of Messaging Topics to be unsubscribed.
```

```
TopicListNotification:
  description: Messaging Topic list changes notification data
  type: object
  required:
    - msgTopics
  properties:
    exprTime:
      $ref: 'TS29122_CommonData.yaml#/components/schemas/DateTime'
    msgTopics:
      type: array
      items:
        $ref: '#/components/schemas/MessagingTopic'
      minItems: 1
      description: list of Messaging Topics for notification.
```

```
MessagingTopic:
  description: Represent Messaging Topic information
  type: object
  required:
    - msgTopic
    - updateStat
  properties:
    msgTopic:
      type: string
    updateStat:
      $ref: '#/components/schemas/UpdateStatus'
```

```
#
# ENUMERATIONS DATA TYPES
#
```

```
UpdateStatus:
  anyOf:
    - type: string
      enum:
        - CREATED
        - DELETED
    - type: string
      description: >
        This string provides forward-compatibility with future extensions to the enumeration
        and is not used to encode content defined in the present version of this API.
  description: |
    Represents the Messaging Topic Update status.
    Possible values are:
    - CREATED: Indicates Topic newly created.
    - DELETED: Indicates Topic newly deleted.
```

Annex B (informative): Change history

Change history							
Date	Meeting	TDoc	CR	Rev	Cat	Subject/Comment	New version
2021-10	CT3#118-e	C3-215030				Draft skeleton provided by the rapporteur	0.0.0
2021-10	CT3#118-e	C3-215479				Inclusion of documents agreed in CT3#118e C3-215116, C3-215165, C3-215206, C3-215432, C3-215441, C3-215462. Editorial change from the rapporteur. Correction from the rapporteur.	0.1.0
2021-11	CT3#119-e	C3-216552				Inclusion of documents agreed in CT3#119e C3-216175, C3-216525, C3-216528, C3-216529, C3-216545, C3-216546, C3-216581. Correction from the rapporteur.	0.2.0
2022-01	CT3#119bis-e	C3-220458				Inclusion of documents agreed in CT3#119bis-e C3-220384, C3-220385, C3-220386, C3-220387, C3-220389, C3-220391, C3-220410, C3-220411, C3-220412 and C3-220413. Correction from the rapporteur.	0.3.0
2022-02	CT3#120e	C3-221559				Inclusion of documents agreed in CT3#120e C3-221245, C3-221246, C3-221247, C3-221248, C3-221249, C3-221529, C3-221530, C3-221531, C3-221532, C3-221533, C3-222534, C3-221535, C3-221536, C3-221537, C3-221538, C3-221541, C3-221542, C3-221543, C3-221544, C3-221545, C3-221546, C3-221547, C3-221548 and C3-221549. Correction from the rapporteur.	0.4.0
2022-03	CT#95e	CP-220163				Presentation to TSG CT for approval	1.0.0
2022-03	CT#95e	CP-220163				Approved by TSG CT	17.0.0
2022-06	CT#96	CP-221118	0001	1	B	Add Usage of Network Capabilities in MSGin5G Server	17.1.0
2022-06	CT#96	CP-221118	0002	1	F	Update of abbreviations and terms	17.1.0
2022-06	CT#96	CP-221118	0003	1	F	Update the Presence condition of appld in Table 8.1.5.2.2-1	17.1.0
2022-06	CT#96	CP-221151	0004		F	Update of info and externalDocs fields	17.1.0
2022-09	CT#97e	CP-222092	0005	2	F	Update the Presence condition of Store and forward flag	17.2.0
2022-12	CT#98-e	CP-223199	0007	1	F	MSGS_ASRegistration_Deregister operation related corrections in the description clause	18.0.0
2022-12	CT#98-e	CP-223199	0008	1	F	MSGS_ASRegistration_Request operation related corrections in the description clause	18.0.0
2022-12	CT#98-e	CP-223185	0009		F	"Error handling" clause: alignment with other NBI and 5GS APIs	18.0.0
2022-12	CT#98-e	CP-223200	0010	1	F	Rewording some description of data structure in clasue 5.3.2	18.0.0
2022-12	CT#98-e	CP-223200	0011	1	F	Change the underline to hyphen of the apiname in clause 5.1	18.0.0
2022-12	CT#98-e	CP-223189	0012		F	Update of info and externalDocs fields	18.0.0
2023-03	CT#99	CP-230156	0013	1	F	Correction of the description fields in enumerations	18.1.0
2023-03	CT#99	CP-230161	0014		F	Update of info and externalDocs fields	18.1.0
2023-06	CT#100	CP-231150	0015	1	B	Update of Scope for Broadcast Messaging	18.2.0
2023-06	CT#100	CP-231150	0016	1	D	Editorial Fixes of Words and Numbers	18.2.0
2023-06	CT#100	CP-231150	0017	1	B	Update the terms and overview	18.2.0
2023-06	CT#100	CP-231150	0018	1	B	MSGG_BGDelivery Service introduction	18.2.0
2023-06	CT#100	CP-231150	0019	1	B	MSGG_BGDelivery service description and operations	18.2.0
2023-06	CT#100	CP-231150	0020	1	B	MSGG_BGDelivery API	18.2.0
2023-06	CT#100	CP-231337	0021	1	B	New OpenAPI file for MSGG_BGDelivery API	18.2.0
2023-06	CT#100	CP-231150	0022	1	B	Update Scope for Topic Messaging	18.2.0
2023-06	CT#100	CP-231150	0023	1	B	Add service of Topic Messaging	18.2.0
2023-06	CT#100	CP-231150	0024	1	D	Reference Clause Number Correction	18.2.0
2023-08	CT#101	CP-232111	0026	1	F	Remove the IE of security credentials in message delivery procedures	18.3.0
2023-08	CT#101	CP-232111	0027		F	Corrections on MSGS_BGDelivery API	18.3.0
2023-08	CT#101	CP-232111	0028	1	F	Update the service operations of message delivery status report	18.3.0
2023-08	CT#101	CP-232085	0029		F	Update of info and externalDocs fields	18.3.0
2023-12	CT#102	CP-233251	0030	1	F	Correction on the openAPI files	18.4.0
2023-12	CT#102	CP-233251	0032	1	F	Corrections to BgMessageDelivery data type	18.4.0
2023-12	CT#102	CP-233251	0033	1	B	Introduction update for Messaging Topic Events	18.4.0
2023-12	CT#102	CP-233251	0034	1	B	Service Description of Messaging Topic Events	18.4.0
2023-12	CT#102	CP-233251	0035	1	B	Service Operation for Messaging Topic List Subscription	18.4.0
2023-12	CT#102	CP-233251	0036	1	B	Service Operation for Messaging Topic Subscription	18.4.0
2023-12	CT#102	CP-233251	0037	2	B	Messaging Topic Events API	18.4.0
2023-12	CT#102	CP-233251	0039	2	F	Correction on Terms and Abbreviations	18.4.0
2023-12	CT#102	CP-233251	0040	1	F	Corrections to BgMessageDelivery data type	18.4.0
2023-12	CT#102	CP-233251	0041		F	Correction on Messaging Topic Events API	18.4.0
2023-12	CT#102	CP-233229	0042	1	F	IETF HTTP RFCs obsoleted by RFCs 9110, 9111, 9112 and 9113	18.4.0
2023-12	CT#102	CP-233237	0044		F	Update of info and externalDocs fields	18.4.0
2024-03	CT#103	CP-240196	0045	1	F	Corrections in MSGG_BGDelivery API	18.5.0
2024-03	CT#103	CP-240196	0046		F	Updates API provided by MSGin5G Server	18.5.0
2024-03	CT#103	CP-240196	0047	1	B	OpenAPI and Corrections for TopicListEvent	18.5.0

2024-03	CT#103	CP-240166	0048		F	Update of info and externalDocs fields	18.5.0
2024-06	CT#104	CP-241123	0049	1	F	Callback correction to MSGS_TopicListEvent API	18.6.0
2024-06	CT#104	CP-241123	0050	1	F	Editorial fixes on service and API descriptions	18.6.0
2024-06	CT#104	CP-241123	0051		F	EN resolutions within MSGG_BGDelivery API	18.6.0
2024-06	CT#104	CP-241251	0052	2	F	Correct references and clarify regarding NBI usage	18.6.0
2024-06	CT#104	CP-241086	0053		F	Update of info and externalDocs fields	18.6.0
2024-07	CT#104					Correction to fix OpenAPI parsing errors	18.6.1
2024-09	CT#105	CP-242152	0055		F	Corrections to add the missing resource representation in resource creation response	18.7.0
2024-09	CT#105	CP-242152	0056		F	Corrections to the resource deletion definition	18.7.0
2024-09	CT#105	CP-242120	0057		F	Update of info and externalDocs fields	18.7.0
2024-09	CT#105	CP-242113	0054	1	F	Correct presence field for some of the attributes	19.0.0
2024-12	CT#106	CP-243085	0059		F	Introduce the support of the 3xx redirection mechanism where missing	19.1.0
2024-12	CT#106	CP-243147	0061		F	Update of info and externalDocs fields	19.1.0
2025-01	CT#106	-	-	-	-	Corrects YAML file of MSGS_ASRegistration API	19.1.1
2025-02	CT#107	CP-250109	0062	1	F	Updates to ASRegistration Service	19.2.0
2025-02	CT#107	CP-250109	0063		F	Updates to MSGDelivery Service	19.2.0
2025-02	CT#107	CP-250120	0065		A	Necessary corrections to the MSGS_TopiclistEvent API	19.2.0
2025-02	CT#107	CP-250109	0066	1	F	Description updates on the redirection mechanism	19.2.0
2025-02	CT#107	CP-250129	0068		F	Update of info and externalDocs fields	19.2.0
2025-06	CT#108	CP-251131	0069	1	B	Update on registration for controlling AS	19.3.0
2025-12	CT#110	CP-253036	0070	1	F	TS reference correction	19.4.0
2025-12	CT#110	CP-253026	0071	1	B	Updates and corrections to the CAPIF related Security clause	19.4.0
2025-12	CT#110	CP-253064	0072		F	Update of info and externalDocs fields	19.4.0

History

Version	Date	Status
V19.3.0	January 2026	Publication
V19.4.0	February 2026	Publication