

ETSI TS 124 323 V8.0.0 (2009-01)

Technical Specification

**Universal Mobile Telecommunications System (UMTS);
LTE;
Trace Management Object (MO)
(3GPP TS 24.323 version 8.0.0 Release 8)**



Reference

DTS/TSGC-0124323v800

Keywords

LTE, UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2009.
All rights reserved.

DECTTM, **PLUGTESTS**TM, **UMTS**TM, **TIPHON**TM, the TIPHON logo and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members.

3GPPTM is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

LTETM is a Trade Mark of ETSI currently being registered

for the benefit of its Members and of the 3GPP Organizational Partners.

GSM[®] and the GSM logo are Trade Marks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Contents

Intellectual Property Rights	2
Foreword.....	2
Foreword.....	4
1 Scope	5
2 References	5
3 Definitions and abbreviations.....	5
3.1 Definitions	5
3.2 Abbreviations	5
4 IMS service level tracing management object.....	6
5 Management object parameters.....	8
5.1 General	8
5.2 Node: /<X>	8
5.3 /<X>/AppID.....	8
5.4 /<X>/Name	8
5.5 /<X>/Debug_info_List/	8
5.6 /<X>/Debug_info_List/<X>.....	9
5.7 /<X>/Debug_info_List/<X>/Debug_config/	9
5.8 /<X>/Debug_info_List/<X>/Debug_config/Address_of_record	9
5.9 /<X>/Debug_info_List/<X>/Debug_config/Session_List/	9
5.10 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>.....	10
5.11 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/	10
5.12 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Start_trigger/	10
5.13 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Start_trigger/From	10
5.14 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Start_trigger/To.....	11
5.15 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Start_trigger/ICSI.....	11
5.16 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Start_trigger/IARI.....	11
5.17 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Start_trigger/Method.....	11
5.18 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Start_trigger/Time.....	12
5.19 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Start_trigger/Debug_ID	12
5.20 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Stop_trigger/	12
5.21 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Stop_trigger/Time	12
5.22 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Stop_trigger/Time_period.....	13
5.23 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Stop_trigger/Reason.....	13
5.24 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Control/	13
5.25 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Control/Interface_List/	14
5.26 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Control/Interface_List/<X>/	14
5.27/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Control/Interface_List/<X>/Interface	14
5.28 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Control/Depth	14
5.29 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Control/Debug_ID	15
Annex A (informative): Management object DDF	16
Annex B (informative): Change history	28
History	29

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

This document defines the IMS service level tracing management object. The management object is compatible with OMA Device Management protocol specifications, version 1.2 and upwards, and is defined using the OMA DM Device Description Framework as described in the Enabler Release Definition OMA-ERELD_DM-V1_2 [3].

The IMS service level tracing management object consists of relevant parameters that can be managed for IMS service level tracing capabilities.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.003: "Numbering, addressing and identification".
- [3] OMA-ERELD-DM-V1_2-20070209-A: "Enabler Release Definition for OMA Device Management, Version 1.2".
- [4] XML Schema Part 2: Datatypes Second Edition, W3C Recommendation 28 October 2004, <http://www.w3.org/TR/xmlschema-2/>
- [5] draft-dawes-sipping-debug-event-00 (May 2008): "A Session Initiation Protocol (SIP) Event Package for Debugging".

Editor's note: The above document cannot be formally referenced until it is published as an RFC.

- [6] 3GPP TS 32.422: "Telecommunication management; Subscriber and equipment trace; Trace control and configuration management".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] apply.

Editor's Note: This section is currently a placeholder

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CN	Core Network
DDF	Device Description Framework
DM	Device Management
IMS	IP Multimedia core network Subsystem

IP	Internet Protocol
MO	Management Object
OMA	Open Mobile Alliance
SIP	Session Initiation Protocol
UE	User Equipment

4 IMS service level tracing management object

The IMS service level tracing management object is used to manage configuration settings of the UE for IMS service level tracing. The management object covers parameters for IMS service level trace related capabilities. The management object enables the management of the settings on behalf of the end user.

The management object Identifier is: urn:oma:mo:XXXX:1.0.

Editor's Note: The value urn:oma:mo:XXXX:1.0 needs to be replaced with the value registered for this MO by OMA.

Protocol compatibility: This MO is compatible with OMA DM 1.2.

The following nodes and leaf objects are possible under the XXXX node:

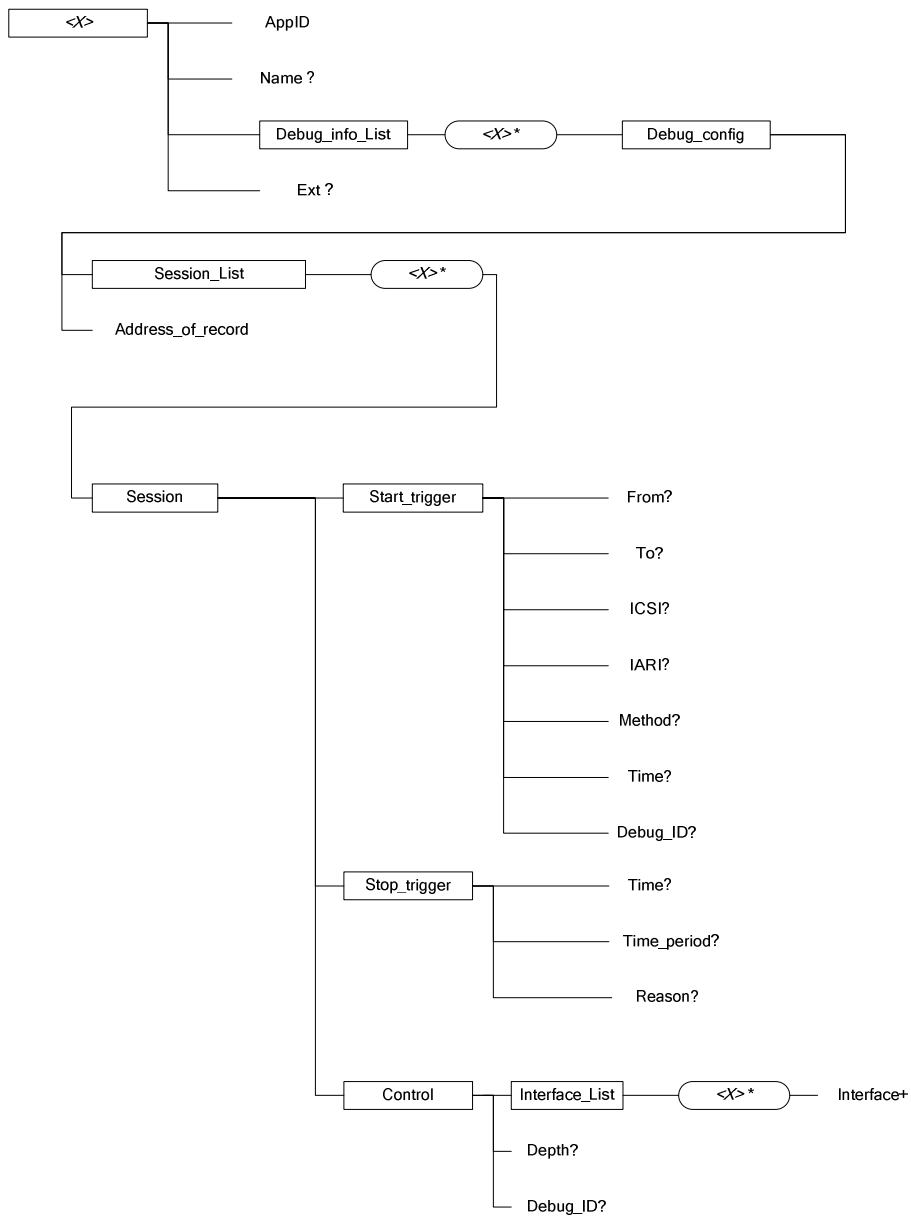


Figure 1: The 3GPP Trace Management Object

5 Management object parameters

5.1 General

This clause describes the parameters for the IMS service level tracing management object.

5.2 Node: /<X>

This interior node acts as a placeholder for one or more accounts for a fixed node.

- Occurrence: OneOrMore
- Format: node
- Access Types: Get
- Values: N/A

The interior node is mandatory if the UE supports one or more IMS service level tracing capabilities. Support for a UE is defined by the related roles as defined by the related IMS service level tracing service, as listed in clause 4 of this specification.

NOTE: One node is normally used.

5.3 /<X>/AppID

The AppID identifies the type of the application service available at the described application service access point. The value is globally unique.

- Occurrence: One
- Format: chr
- Access Types: Get
- Value: <ap2001>

NOTE: The value of the 3GPP_IMS/AppID is determined by OMA.

5.4 /<X>/Name

The Name leaf is a name for the 3GPP service level tracing settings.

- Occurrence: ZeroOrOne
- Format: chr
- Access Types: Get
- Values: <User displayable name>

5.5 /<X>/Debug_info_List/

The Debug-info_List node acts as a placeholder for control and configuration of IMS service level tracing.

- Occurrence: ZeroOrOne
- Format: node

- Access Types: Get, Replace
- Values: N/A

5.6 /<X>/Debug_info_List/<X>

This run-time node acts as a placeholder for one or more debugging configurations containing control and configuration of IMS service level tracing.

- Occurrence: One
- Format: node
- Access Types: Get
- Values: N/A

5.7 /<X>/Debug_info_List/<X>/Debug_config/

The Debug-config node acts as a placeholder for control and configuration of IMS service level tracing.

- Occurrence: ZeroOrMore
- Format: node
- Access Types: Get
- Values: N/A

5.8

/<X>/Debug_info_List/<X>/Debug_config/Address_of_record

The Address_of_record leaf represents one public user identity.

- Occurrence: One
- Format: chr
- Access Types: Get, Replace
- Values: <A public user identity>

This public user identity is the identity used to subscribe to SIP debugging configuration from the debug-event package.

The format of the public user identity is defined by 3GPP TS 23.003 [2].

EXAMPLE: sip: 234150999999999@ims.mnc015.mcc234.3gppnetwork.org

5.9 /<X>/Debug_info_List/<X>/Debug_config/Session_List/

The Session_List interior node is used to allow a reference to a list of different SIP sessions to be debugged.

- Occurrence: One
- Format: node
- Access Types: Get
- Values: N/A

5.10 /<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>

This run-time node acts as a placeholder for one or more descriptions of SIP sessions to be debugged.

- Occurrence: One
- Format: node
- Access Types: Get
- Values: N/A

5.11

/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/ Session/

The Session interior node is used to allow a reference to events that start and stop logging of SIP signalling, and to control what is logged.

- Occurrence: One
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.12

/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/ Session/Start_trigger/

The Start_trigger interior node is used to allow a reference to events that start logging of SIP signalling.

- Occurrence: One
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.13

/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/ Session/Start_trigger/From

The From leaf represents an address in the From: SIP header field.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.14

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/
Session/Start_trigger/To`

The To leaf represents an address in the To: SIP header field.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.15

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/
Session/Start_trigger/ICSI`

The ICSI leaf represents an IMS communication service identifier.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

The format of the IMS communication service identifier is defined by 3GPP TS 24.229 [5].

EXAMPLE: urn:urnxxx:telephony.3gpp.mmtel

5.16

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/
Session/Start_trigger/IARI`

The IARI leaf represents an IMS application reference.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: an IMS application reference

The format of the IMS application reference is defined by 3GPP TS 24.229 [5].

EXAMPLE: urn:urnxxx:telephony.3gpp.mmtelapplicationv1

5.17

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/
Session/Start_trigger/Method`

The Method leaf represents a SIP method.

- Occurrence: ZeroOrOne

- Format: node
- Access Types: Get, Replace
- Values: A SIP method name, e.g. MESSAGE

5.18

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Start_trigger/Time`

The Method leaf represents a SIP method.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: A time as described by the standard types for an XML schema [4].

5.19

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Start_trigger/Debug_ID`

The Debug_ID leaf represents an identifier that allows trace logging to be correlated across IMS entities.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: 6-digit hexadecimal number

The format of the trace reference is 3 octets, as defined by 3GPP TS 32.422 [6].

EXAMPLE: 7BA614

5.20

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Stop_trigger/`

The Stop_trigger interior node is used to allow a reference to events that stop logging of SIP signalling.

- Occurrence: One
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.21

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Stop_trigger/Time`

The Time leaf represents a time at which SIP logging is stopped.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: A time as described by the standard types for an XML schema [4].

5.22

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Stop_trigger/Time_period`

The Time_period leaf represents a time duration of logging SIP signalling. When the duration has expired, logging stops.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: A time period as described by the standard types for an XML schema [4].

5.23

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Stop_trigger/Reason`

The Reason leaf represents a named event that causes logging SIP signalling to stop.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: One of dialog_established, session_end

5.24

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/Session/Control/`

The Control interior node is used to allow a reference to parameters that control what SIP signalling is logged.

- Occurrence: One
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.25

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/
Session/Control/Interface_List/`

The Interface_List interior node is used to allow a reference to a list of different interfaces for which SIP signalling is to be logged.

- Occurrence: One
- Format: node
- Access Types: Get
- Values: N/A

5.26

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/
Session/Control/Interface_List/<X>/`

This run-time node acts as a placeholder for one or more identifiers of interfaces for which SIP signalling is to be logged.

- Occurrence: One
- Format: node
- Access Types: Get
- Values: N/A

5.27

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/
Session/Control/Interface_List/<X>/Interface`

The Interface leaf identifies an interfaces for which SIP signalling is to be logged.

- Occurrence: One
- Format: node
- Access Types: Get
- Values: Interface identifier

5.28

`/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/
Session/Control/Depth`

The Depth leaf indicates which SIP requests and responses are to be logged.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get
- Values: "maximum" or "minimum"

5.29

/<X>/Debug_info_List/<X>/Debug_config/Session_List/<X>/
Session/Control/Debug_ID

The Debug_ID leaf contains an identifier that is common to all logged SIP requests and responses for one logging session.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get
- Values: "maximum" or "minimum"

Annex A (informative): Management object DDF

This DDF is the standardized minimal set. A vendor can define it's own DDF for the complete device. This DDF can include more features than this minimal standardized version.

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE MgmtTree PUBLIC "-//OMA//DTD SYNCML-DMDDF 1.2//EN"
http://www.openmobilealliance.org/tech/DTD/OMA-SyncML-DMDDF-1_2.dtd>
<MgmtTree>
  <VerDTD>1.2</VerDTD>
  <Man>--The device manufacturer--</Man>
  <Mod>--The device model--</Mod>
  <Node>
    <NodeName>IMS service level trace</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
      </AccessType>
      <Description>IMS service level trace configuration parameters</Description>
      <DFFormat>
        <node/>
      </DFFormat>
      <Occurrence>
        <OneOrMore/>
      </Occurrence>
      <DFTitle>The IMS service level tracing management object.</DFTitle>
      <DFType>
        <DDFName/>
      </DFType>
    </DFProperties>
  </Node>
  <Node>
    <NodeName>AppID</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
      </AccessType>
      <DFFormat>
        <chr/>
      </DFFormat>
      <Occurrence>
        <One/>
      </Occurrence>
      <Scope>
        <Permanent/>
      </Scope>
      <DFTitle>The Application ID.</DFTitle>
      <DFType>
        <MIME>text/plain</MIME>
      </DFType>
    </DFProperties>
  </Node>
  <Node>
    <NodeName>Name</NodeName>
    <DFProperties>
      <AccessType>
        <Get/>
      </AccessType>
    </DFProperties>
  </Node>
</MgmtTree>
```

```

    </AccessType>
    <DFFormat>
      <chr/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <Scope>
      <Dynamic/>
    </Scope>
    <DFTitle>User displayable name for the node.</DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>

<Node>
  <NodeName>Debug_info_List</NodeName>
  <!-- The Debug_info_List node starts here. -->
  <DFProperties>
    <AccessType>
      <Get/>
    </AccessType>
    <DFFormat>
      <node/>
    </DFFormat>
    <Occurrence>
      <One/>
    </Occurrence>
    <Scope>
      <Permanent/>
    </Scope>
    <DFTitle>List of debug configurations, one per debug session.</DFTitle>
    <DFType>
      <DDFName/>
    </DFType>
  </DFProperties>
  <Node>
    <!-- The placeholder X node for Debug_config. -->
    <NodeName/>
    <DFProperties>
      <AccessType>
        <Get/>
      </AccessType>
      <DFFormat>
        <node/>
      </DFFormat>
      <Occurrence>
        <ZeroOrMore/>
      </Occurrence>
      <Scope>
        <Dynamic/>
      </Scope>
      <DFTitle>The "name" node for a debug configuration object.
    </DFTitle>
      <DFType>
        <DDFName/>
      </DFType>
    </DFProperties>
  </Node>
  <!-- The Debug_config node starts here. -->

```

```

<nodeName>Debug_config</nodeName>
<DFProperties>
  <AccessType>
    <Get/>
    <Replace/>
  </AccessType>
  <DFFormat>
    <node/>
  </DFFormat>
  <Occurrence>
    <One/>
  </Occurrence>
  <Scope>
    <Permanent/>
  </Scope>
  <DFTitle>Configuration for debugging for one address of record.</DFTitle>
  <DFType>
    <DDFName/>
  </DFType>
</DFProperties>
<Node>
<!-- The Address_of_record node starts here. -->
<nodeName>Address_of_record</nodeName>
<DFProperties>
  <AccessType>
    <Get/>
    <Replace/>
  </AccessType>
  <DFFormat>
    <chr/>
  </DFFormat>
  <Occurrence>
    <One/>
  </Occurrence>
  <Scope>
    <Permanent/>
  </Scope>
  <DFTitle>The address of record to be traced.</DFTitle>
  <DFType>
    <MIME>text/plain</MIME>
  </DFType>
</DFProperties>
</Node>
<!-- The Address_of_record node ends here. -->

<Node>
<!-- The Session_List node starts here. -->
<nodeName>Session_List</nodeName>
<DFProperties>
  <AccessType>
    <Get/>
    <Replace/>
  </AccessType>
  <DFFormat>
    <node/>
  </DFFormat>
  <Occurrence>
    <One/>
  </Occurrence>
  <Scope>
    <Permanent/>
  </Scope>

```

```

    <DFTitle>Debug configuration parameters, one configuration object per session.</DFTitle>
    <DFType>
      <DDFName/>
    </DFType>
  </DFProperties>

```

```

<Node>
<!-- The placeholder X node for Session_List. -->
<NodeName/>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <node/>
  </DFFormat>
  <Occurrence>
    <OneOrMore/>
  </Occurrence>
  <Scope>
    <Dynamic/>
  </Scope>
  <DFTitle>The "name" node for a list of sessions to be traced.
  </DFTitle>
  <DFType>
    <DDFName/>
  </DFType>
</DFProperties>

```

```

<Node>
<!-- Start of the Session node. -->
<NodeName>Session<NodeName/>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <node/>
  </DFFormat>
  <Occurrence>
    <One/>
  </Occurrence>
  <Scope>
    <Permanent/>
  </Scope>
  <DFTitle>The configuration of a single debug session.
  </DFTitle>
  <DFType>
    <DDFName/>
  </DFType>
</DFProperties>

```

```

<Node>
<!-- Start of the Start_trigger node. -->
<NodeName>Start_trigger<NodeName/>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <node/>
  </DFFormat>

```

```

    <Occurrence>
      <One/>
    </Occurrence>
    <Scope>
      <Permanent/>
    </Scope>
    <DFTitle>The description of a start trigger for a debug session.
  </DFTitle>
  <DFType>
    <DDFName/>
  </DFType>
</DFProperties>

```

```

<Node>
<!-- Start of the From node. -->
<NodeName>From<NodeName/>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <chr/>
  </DFFormat>
  <Occurrence>
    <ZeroOrOne/>
  </Occurrence>
  <Scope>
    <Dynamic/>
  </Scope>
  <DFTitle>The SIP From header field in a debug session.
  </DFTitle>
  <DFType>
    <MIME>text/plain</MIME>
  </DFType>
</DFProperties>
</Node>
<!-- The From node ends here. -->

```

```

<Node>
<!-- Start of the To node. -->
<NodeName>To<NodeName/>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <chr/>
  </DFFormat>
  <Occurrence>
    <ZeroOrOne/>
  </Occurrence>
  <Scope>
    <Dynamic/>
  </Scope>
  <DFTitle>The SIP To header field in a debug session.
  </DFTitle>
  <DFType>
    <MIME>text/plain</MIME>
  </DFType>
</DFProperties>
</Node>
<!-- The To node ends here. -->

```

```
<Node>
<!-- Start of the ICSI node. -->
<NodeName>ICSI</NodeName>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <chr/>
  </DFFormat>
  <Occurrence>
    <ZeroOrOne/>
  </Occurrence>
  <Scope>
    <Dynamic/>
  </Scope>
  <DFTitle>The IMS service identifier (ICSI) in a session to be traced.
  </DFTitle>
  <DFType>
    <MIME>text/plain</MIME>
  </DFType>
</DFProperties>
</Node>
<!-- The ICSI node ends here. -->

<Node>
<!-- Start of the IARI node. -->
<NodeName>IARI</NodeName>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <chr/>
  </DFFormat>
  <Occurrence>
    <ZeroOrOne/>
  </Occurrence>
  <Scope>
    <Dynamic/>
  </Scope>
  <DFTitle>The IMS application reference (IARI) in a session to be traced.
  </DFTitle>
  <DFType>
    <MIME>text/plain</MIME>
  </DFType>
</DFProperties>
</Node>
<!-- The IARI node ends here. -->

<Node>

<!-- Start of the method node. -->
<NodeName>Method</NodeName>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <chr/>
  </DFFormat>
```

```

    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
  <Scope>
    <Dynamic/>
  </Scope>
  <DFTitle>The SIP method that starts a debug session.
</DFTitle>
  <DFType>
    <MIME>text/plain</MIME>
  </DFType>
</DFProperties>
</Node>
<!-- The method node ends here. -->

<Node>
<!-- Start of the Time node. -->
<NodeName>ICSI</NodeName/>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <chr/>
  </DFFormat>
  <Occurrence>
    <ZeroOrOne/>
  </Occurrence>
  <Scope>
    <Dynamic/>
  </Scope>
  <DFTitle>The Time of day to start a debug session.
</DFTitle>
  <DFType>
    <MIME>text/plain</MIME>
  </DFType>
</DFProperties>
</Node>
<!-- The Time node ends here. -->

<Node>
<!-- Start of the Debug_ID node. -->
<NodeName>Debug_ID</NodeName/>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <chr/>
  </DFFormat>
  <Occurrence>
    <ZeroOrOne/>
  </Occurrence>
  <Scope>
    <Dynamic/>
  </Scope>
  <DFTitle>The identity used to match logging of session across SIP entities.
</DFTitle>
  <DFType>
    <MIME>text/plain</MIME>
  </DFType>
</DFProperties>

```

```

</Node>
<!-- The Debug_ID node ends here. -->
</Node>
<!-- The Start-trigger node ends here. -->

<Node>
<!-- Start of the Stop_trigger node. -->
<nodeName>Stop_trigger</nodeName>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <node/>
  </DFFormat>
  <Occurrence>
    <One/>
  </Occurrence>
  <Scope>
    <Permanent/>
  </Scope>
  <DFTitle>Description of the event that stops an ongoing tracing session.
  </DFTitle>
  <DFType>
    <DDFName/>
  </DFType>
</DFProperties>

<Node>
<!-- Start of the Time node. -->
<nodeName>Time</nodeName>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <chr/>
  </DFFormat>
  <Occurrence>
    <ZeroOrOne/>
  </Occurrence>
  <Scope>
    <Dynamic/>
  </Scope>
  <DFTitle>The time at which to stop a debugging session.
  </DFTitle>
  <DFType>
    <MIME>text/plain</MIME>
  </DFType>
</DFProperties>
</Node>
<!-- The Time node ends here. -->

<Node>
<!-- Start of the Time_period node. -->
<nodeName>Time_period</nodeName>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <chr/>

```



```

    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
  </Scope>
  <Dynamic/>
</Scope>
<DFTitle>The time period after which a debugging session is stopped.
</DFTitle>
<DFType>
  <MIME>text/plain</MIME>
</DFType>
</DFProperties>
</Node>
<!-- The Time_period node ends here. -->

<Node>
<!-- Start of the Reason node. -->
<NodeName>Reason</NodeName/>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <chr/>
  </DFFormat>
  <Occurrence>
    <One/>
  </Occurrence>
  <Scope>
    <Dynamic/>
  </Scope>
  <DFTitle>The reason to stop a debugging session. Values are dialog_established and session_end
  </DFTitle>
  <DFType>
    <MIME>text/plain</MIME>
  </DFType>
</DFProperties>
</Node>
<!-- The Reason node ends here. -->
</Node>
<!-- The Stop_trigger node ends here. -->

<Node>
<!-- Start of the Control node. -->
<NodeName>Control</NodeName/>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <node/>
  </DFFormat>
  <Occurrence>
    <One/>
  </Occurrence>
  <Scope>
    <Permanent/>
  </Scope>
  <DFTitle>Control information for a tracing session including depth of trace and interfaces to
trace.
  </DFTitle>

```

```

    <DFTType>
      <DDFName/>
    </DFTType>
  </DFProperties>

  <Node>
  <!-- Start of the Interface_list node. -->
  <NodeName>Interface_list</NodeName/>
  <DFProperties>
    <AccessType>
      <Get/>
    </AccessType>
    <DFFormat>
      <node/>
    </DFFormat>
    <Occurrence>
      <One/>
    </Occurrence>
    <Scope>
      <Permanent/>
    </Scope>
    <DFTTitle>List of interfaces for which SIP signalling will be logged.
  </DFTTitle>
  <DFTType>
    <DDFName/>
  </DFTType>
  </DFProperties>
  <Node>
  <!-- The placeholder X node for Interface_List. -->
  <NodeName/>
  <DFProperties>
    <AccessType>
      <Get/>
    </AccessType>
    <DFFormat>
      <node/>
    </DFFormat>
    <Occurrence>
      <ZeroOrMore/>
    </Occurrence>
    <Scope>
      <Dynamic/>
    </Scope>
    <DFTTitle>The "name" node for a list of interfaces.
  </DFTTitle>
  <DFTType>
    <DDFName/>
  </DFTType>
  </DFProperties>

  <Node>
  <!-- Start of the Interface node. -->
  <NodeName>Interface</NodeName/>
  <DFProperties>
    <AccessType>
      <Get/>
    </AccessType>
    <DFFormat>
      <chr/>
    </DFFormat>
    <Occurrence>
      <One/>

```

```

    </Occurrence>
    <Scope>
      <Dynamic/>
    </Scope>
    <DFTitle>The interface for which SIP signalling will be logged
    </DFTitle>
    <DFType>
      <MIME>text/plain</MIME>
    </DFType>
  </DFProperties>
</Node>
<!-- The Interface node ends here. -->

</Node>
<!-- end of the placeholder X node for Interface_List -->
</Node>
<!-- end of the Interface_list node. -->

<Node>
<!-- Start of the Depth node. -->
<nodeName>Depth</nodeName>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <chr/>
  </DFFormat>
  <Occurrence>
    <ZeroOrOne/>
  </Occurrence>
  <Scope>
    <Dynamic/>
  </Scope>
  <DFTitle>The depth of logging for a debug session, values are minimum and maximum.
  </DFTitle>
  <DFType>
    <MIME>text/plain</MIME>
  </DFType>
</DFProperties>
</Node>
<!-- The Depth node ends here. -->

<Node>
<!-- Start of the Debug_ID node. -->
<nodeName>Debug_ID</nodeName>
<DFProperties>
  <AccessType>
    <Get/>
  </AccessType>
  <DFFormat>
    <chr/>
  </DFFormat>
  <Occurrence>
    <ZeroOrOne/>
  </Occurrence>
  <Scope>
    <Dynamic/>
  </Scope>
  <DFTitle>The identity used to match logging in a debug session across entities.
  </DFTitle>
  <DFType>

```

```

        <MIME>text/plain</MIME>
    </DFType>
</DFProperties>
</Node>
<!-- The Debug_ID node ends here. -->

</Node>
<!-- The Control node ends here. -->

</Node>
<!-- The Session node ends here. -->

</Node>
<!-- The placeholder X for the Session_List node ends here. -->
</Node>
<!-- The Session_List node ends here. -->
</Node>
<!-- The Debug_config node ends here. -->
</Node>
<!-- The placeholder X node for Debug_config ends here. -->
</Node>
<!-- The Debug_info_List node ends here. -->

<Node>
  <NodeName>Ext</NodeName>
  <!-- The Extension node starts here. -->
  <DFProperties>
    <AccessType>
      <Get/>
      <Replace/>
    </AccessType>
    <DFFormat>
      <node/>
    </DFFormat>
    <Occurrence>
      <ZeroOrOne/>
    </Occurrence>
    <Scope>
      <Dynamic/>
    </Scope>
    <DFTitle>A collection of all Extension objects.</DFTitle>
    <DFType>
      <DDFName/>
    </DFType>
  </DFProperties>
</Node>
<!-- The Extension node ends here. -->

</Node>
<!-- The IMS service level tracing node ends here. -->
</MgmtTree>

```

Annex B (informative): Change history

Change history								
Date	TSG #	TSG Doc.	CR	Rev	Subject/Comment	Old	New	WG doc
2008-05					Version 0.0.0: Preliminary proposal		0.0.0	C1-081856
2008-05					Version 0.0.1: Corrected preliminary proposal		0.0.1	C1-081956
2008-05					Version 0.0.2: Corrected wrong capitalizations		0.0.2	C1-082040
2008-06					Version 0.0.2: Added specification number		0.0.3	
2008-06	CT1#5 4	C1- 082754			Parameters for service level trace	0.0.3	0.1.0	
2008-09					Version 1.0.0 created for presentation to TSG CT#41 for information	0.1.0	1.0.0	
2008-10					Version 1.1.0 created incorporating C1-084097, C1-084098 for presentation to TSG CT#42 for approval.	1.0.0	1.1.0	
2008-11					Version 2.0.0 created for presentation to TSG CT#42 for approval	1.1.0	2.0.0	
2008-12	CT#42				Version 8.0.0 created after approval in CT#42	2.0.0	8.0.0	

History

Document history		
V8.0.0	January 2009	Publication